PRESENTATION OF SITE INVESTIGATION RESULTS

Snake Lake Dam Alignment

Prepared for:

MPE Engineering Ltd.

ConeTec Job No: 22-02-23796

Project Start Date: 19-Mar-2022
Project End Date: 15-Apr-2022
Report Date: 29-Apr-2022



Prepared by:

ConeTec Investigations Ltd.
201-8327 Eastlake Drive
Burnaby, BC V5A 4W2

Tel: (604) 273-4311

ConeTecYVR@conetec.com
www.conetec.com
www.conetecdataservices.com

© 2022 ConeTec Group of Companies. All Rights Reserved.


Introduction

The enclosed report presents the results of the site investigation program conducted by ConeTec Investigations Ltd. for MPE Engineering Ltd. at Snake Lake Reservoir near Brooks, Alberta. The program consisted of 207 resistivity cone penetration tests (RCPTu), 32 resistivity seismic cone penetration tests (RSCPTu). Please note that this report, which also includes all accompanying data, are subject to the 3rd Party Disclaimer and Client Disclaimer that follow in the 'Limitations' section of this report.

Project Information

Project	
Client	MPE Engineering Ltd.
Project	Snake Lake Dam Alignment
ConeTec project number	22-02-23796

An aerial overview from Google Earth including the CPTu test locations is presented below.

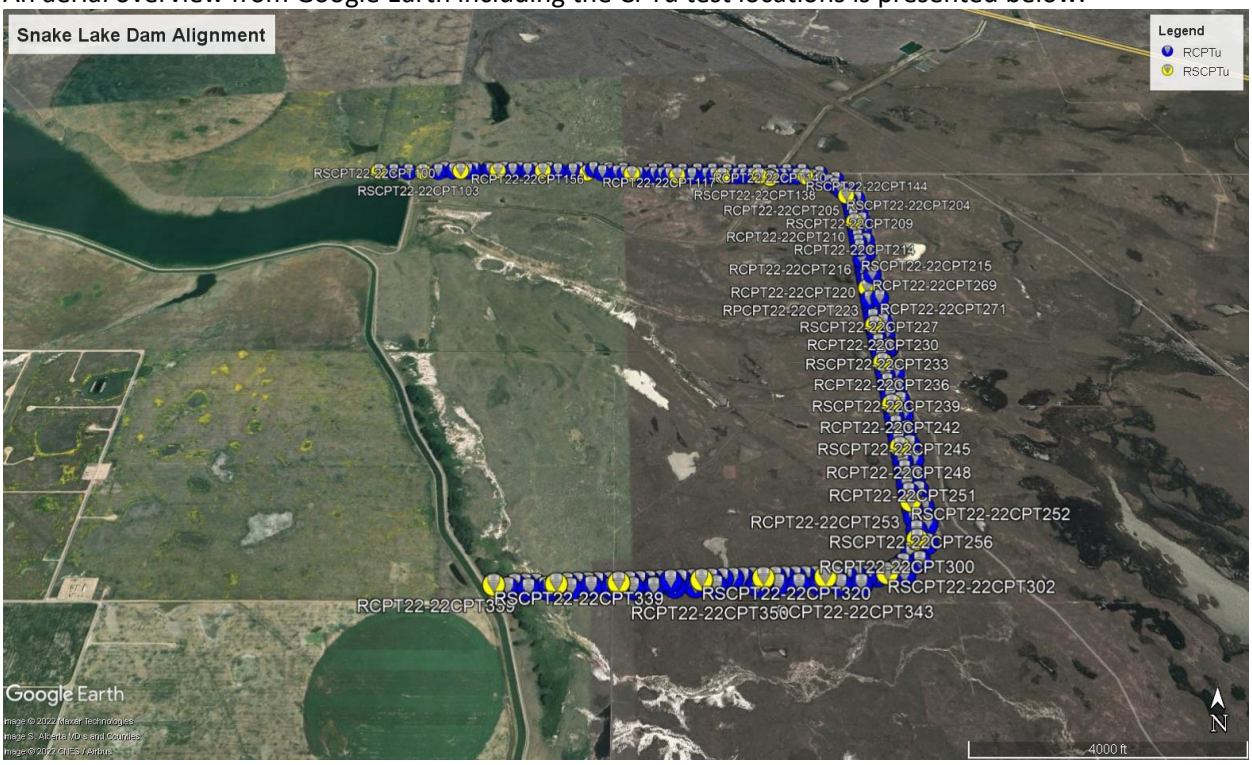

Rig Description	Deployment System	Test Type
CPT truck rig (C14)	30 ton rig cylinder	RCPTu, RSCPTu

Coordinates		
Test Type	Collection Method	EPSG Number
RCPTu, RSCPTu	Client provided	32612

Cone Penetrometers Used for this Project						
Cone Description	Cone Number	Cross Sectional Area (cm^2)	Sleeve Area (cm^2)	Tip Capacity (bar)	Sleeve Capacity (bar)	Pore Pressure Capacity (bar)
651:T1500F15U35	651	15	225	1500	15	35
750:T1500F15U35	750	15	225	1500	15	35
821:T1500F15U35	821	15	225	1500	15	35
822:T1500F15U35	822	15	225	1500	15	35
854:T1500F15U35	854	15	225	1500	15	35
The CPTu summary indicates which cone was used for each sounding.						

Cone Penetration Test (CPTu)	
Depth reference	Depths are referenced to the existing ground surface at the time of each test.
Tip and sleeve data offset	0.1 meter This has been accounted for in the CPT data files.
Additional plots	• Advanced plots with Ic, Su, phi and N1(60) • Resistivity plots • Seismic shear wave velocity plots • Soil Behaviour Type (SBT) scatter plots

Calculated Geotechnical Parameter Tables	
Additional information	The Normalized Soil Behaviour Type Chart based on Q_{tn} (SBT Q_{tn}) (Robertson, 2009) was used to classify the soil for this project. A detailed set of calculated CPTu parameters have been generated and are provided in Excel format files in the release folder. The CPTu parameter calculations are based on values of corrected tip resistance (q_t) sleeve friction (f_s) and pore pressure (u_2). Effective stresses are calculated based on unit weights that have been assigned to the individual soil behaviour type zones and the assumed equilibrium pore pressure profile. Soils were classified as either drained or undrained based on the Q_{tn} Normalized Soil Behaviour Type Chart (Robertson, 2009). Calculations for both drained and undrained parameters were included for materials that classified as silt mixtures and sand mixtures (zones 4 and 5).

Closure

Thank you for the opportunity to work on this project. The equipment used and the field procedures followed complied with current accepted practice standards. This report has been prepared under my supervision and I have reviewed and approved the content.

ConeTec Investigations Ltd.

Report prepared by:

Tiffanie Law, GIT (AB)

Reviewed and approved by:

PROFESSIONAL GEOPHYSICIST ALBERTA
ILMAR WEEMEES
ID 102082

Ilmar Weemees, P. Geoph.
2022-04-29

PERMIT TO PRACTICE
CONETEC INVESTIGATIONS LTD.

RM SIGNATURE: _____

RM APEGA ID #: 102082

DATE: 2022-04-29

PERMIT NUMBER: P011514
The Association of Professional Engineers and Geoscientists of Alberta (APEGA)

Limitations

3rd Party Disclaimer

This report titled “Snake Lake Dam Alignment”, referred to as the (“Report”), was prepared by ConeTec for MPE Engineering Ltd.. The Report is confidential and may not be distributed to or relied upon by any third parties without the express written consent of ConeTec. Any third parties gaining access to the Report do not acquire any rights as a result of such access. Any use which a third party makes of the Report, or any reliance on or decisions made based on it, are the responsibility of such third parties. ConeTec accepts no responsibility for loss, damage and/or expense, if any, suffered by any third parties as a result of decisions made, or actions taken or not taken, which are in any way based on, or related to, the Report or any portion(s) thereof.

Client Disclaimer

ConeTec was retained by MPE Engineering Ltd. to collect and provide the raw data (“Data”) which is included in this report titled “Snake Lake Dam Alignment”, which is referred to as the (“Report”). ConeTec has collected and reported the Data in accordance with current industry standards. No other warranty, express or implied, with respect to the Data is made by ConeTec. In order to properly understand the Data included in the Report, reference must be made to the documents accompanying and other sources referenced in the Report in their entirety. Any analysis, interpretation, judgment, calculations and/or geotechnical parameters (collectively “Interpretations”) included in the Report, including those based on the Data, are outside the scope of ConeTec’s retainer and are included in the Report as a courtesy only. Other than the Data, the contents of the Report (including any Interpretations) should not be relied upon in any fashion without independent verification and ConeTec is in no way responsible for any loss, damage or expense resulting from the use of, and/or reliance on, such material by any party.

Cone penetration tests (CPTu) are conducted using an integrated electronic piezocone penetrometer and data acquisition system manufactured by Adara Systems Ltd., a subsidiary of ConeTec.

ConeTec's piezocone penetrometers are compression type designs in which the tip and friction sleeve load cells are independent and have separate load capacities. The piezocones use strain gauged load cells for tip and sleeve friction and a strain gauged diaphragm type transducer for recording pore pressure. The piezocones also have a platinum resistive temperature device (RTD) for monitoring the temperature of the sensors, an accelerometer type dual axis inclinometer and two geophone sensors for recording seismic signals. All signals are amplified and measured with minimum sixteen-bit resolution down hole within the cone body, and the signals are sent to the surface using a high bandwidth, error corrected digital interface through a shielded cable.

ConeTec penetrometers are manufactured with various tip, friction and pore pressure capacities in both 10 cm^2 and 15 cm^2 tip base area configurations in order to maximize signal resolution for various soil conditions. The specific piezocone used for each test is described in the CPT summary table presented in the first appendix. The 15 cm^2 penetrometers do not require friction reducers as they have a diameter larger than the deployment rods. The 10 cm^2 piezocones use a friction reducer consisting of a rod adapter extension behind the main cone body with an enlarged cross sectional area (typically 44 millimeters diameter over a length of 32 millimeters with tapered leading and trailing edges) located at a distance of 585 millimeters above the cone tip.

The penetrometers are designed with equal end area friction sleeves, a net end area ratio of 0.8 and cone tips with a 60 degree apex angle.

All ConeTec piezocones can record pore pressure at various locations. Unless otherwise noted, the pore pressure filter is located directly behind the cone tip in the "u_2" position (ASTM Type 2). The filter is six millimeters thick, made of porous plastic (polyethylene) having an average pore size of 125 microns (90-160 microns). The function of the filter is to allow rapid movements of extremely small volumes of water needed to activate the pressure transducer while preventing soil ingress or blockage.

The piezocone penetrometers are manufactured with dimensions, tolerances and sensor characteristics that are in general accordance with the current ASTM D5778 standard. ConeTec's calibration criteria also meets or exceeds those of the current ASTM D5778 standard. An illustration of the piezocone penetrometer is presented in Figure CPTu.

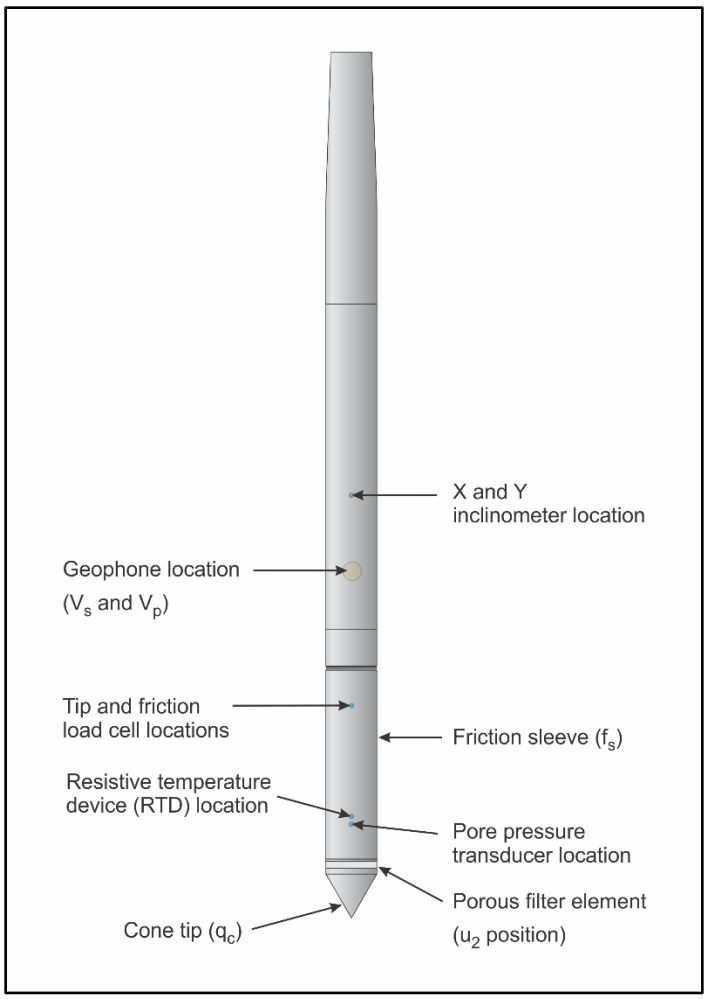


Figure CPTu. Piezocone Penetrometer (15 cm^2)

The ConeTec data acquisition systems consist of a Windows based computer and a signal interface box and power supply. The signal interface combines depth increment signals, seismic trigger signals and the downhole digital data. This combined data is then sent to the Windows based computer for collection and presentation. The data is recorded at fixed depth increments using a depth wheel attached to the push cylinders or by using a spring loaded rubber depth wheel that is held against the cone rods. The typical recording interval is 2.5 centimeters; custom recording intervals are possible.

The system displays the CPTu data in real time and records the following parameters to a storage media during penetration:

- Depth
- Uncorrected tip resistance (q_c)
- Sleeve friction (f_s)
- Dynamic pore pressure (u)
- Additional sensors such as resistivity, passive gamma, ultra violet induced fluorescence, if applicable

All testing is performed in accordance to ConeTec's CPTu operating procedures which are in general accordance with the current ASTM D5778 standard.

Prior to the start of a CPTu sounding a suitable cone is selected, the cone and data acquisition system are powered on, the pore pressure system is saturated with silicone oil and the baseline readings are recorded with the cone hanging freely in a vertical position.

The CPTu is conducted at a steady rate of two centimeters per second, within acceptable tolerances. Typically one meter length rods with an outer diameter of 38.1 millimeters are added to advance the cone to the sounding termination depth. After cone retraction final baselines are recorded.

Additional information pertaining to ConeTec's cone penetration testing procedures:

- Each filter is saturated in silicone oil under vacuum pressure prior to use
- Baseline readings are compared to previous readings
- Soundings are terminated at the client's target depth or at a depth where an obstruction is encountered, excessive rod flex occurs, excessive inclination occurs, equipment damage is likely to take place, or a dangerous working environment arises
- Differences between initial and final baselines are calculated to ensure zero load offsets have not occurred and to ensure compliance with ASTM standards

The interpretation of piezocone data for this report is based on the corrected tip resistance (q_t), sleeve friction (f_s) and pore water pressure (u). The interpretation of soil type is based on the correlations developed by Robertson et al. (1986) and Robertson (1990, 2009). It should be noted that it is not always possible to accurately identify a soil behaviour type based on these parameters. In these situations, experience, judgment and an assessment of other parameters may be used to infer soil behaviour type.

The recorded tip resistance (q_c) is the total force acting on the piezocone tip divided by its base area. The tip resistance is corrected for pore pressure effects and termed corrected tip resistance (q_t) according to the following expression presented in Robertson et al. (1986):

$$q_t = q_c + (1\text{-}a) \bullet u_2$$

where: q_t is the corrected tip resistance
q_c is the recorded tip resistance
u_2 is the recorded dynamic pore pressure behind the tip (u_2 position)
a is the Net Area Ratio for the piezocone (0.8 for ConeTec probes)

The sleeve friction (f_s) is the frictional force on the sleeve divided by its surface area. As all ConeTec piezocones have equal end area friction sleeves, pore pressure corrections to the sleeve data are not required.

The dynamic pore pressure (u) is a measure of the pore pressures generated during cone penetration. To record equilibrium pore pressure, the penetration must be stopped to allow the dynamic pore pressures to stabilize. The rate at which this occurs is predominantly a function of the permeability of the soil and the diameter of the cone.

The friction ratio (Rf) is a calculated parameter. It is defined as the ratio of sleeve friction to the tip resistance expressed as a percentage. Generally, saturated cohesive soils have low tip resistance, high friction ratios and generate large excess pore water pressures. Cohesionless soils have higher tip resistances, lower friction ratios and do not generate significant excess pore water pressure.

A summary of the CPTu soundings along with test details and individual plots are provided in the appendices. A set of files with calculated geotechnical parameters were generated for each sounding based on published correlations and are provided in Excel format in the data release folder. Information regarding the methods used is also included in the data release folder.

For additional information on CPTu interpretations and calculated geotechnical parameters, refer to Robertson et al. (1986), Lunne et al. (1997), Robertson (2009), Mayne (2013, 2014) and Mayne and Peuchen (2012).

References

ASTM D5778-20, 2020, "Standard Test Method for Performing Electronic Friction Cone and Piezocone Penetration Testing of Soils", ASTM International, West Conshohocken, PA. DOI: 10.1520/D5778-20.

Lunne, T., Robertson, P.K. and Powell, J. J. M., 1997, “Cone Penetration Testing in Geotechnical Practice”, Blackie Academic and Professional.

Mayne, P.W., 2013, “Evaluating yield stress of soils from laboratory consolidation and in-situ cone penetration tests”, Sound Geotechnical Research to Practice (Holtz Volume) GSP 230, ASCE, Reston/VA: 406-420. DOI: 10.1061/9780784412770.027.

Mayne, P.W. and Peuchen, J., 2012, “Unit weight trends with cone resistance in soft to firm clays”, Geotechnical and Geophysical Site Characterization *4,* Vol. 1 (Proc. ISC-4, Pernambuco), CRC Press, London: 903-910.

Mayne, P.W., 2014, “Interpretation of geotechnical parameters from seismic piezocone tests”, CPT’14 Keynote Address, Las Vegas, NV, May 2014.

Robertson, P.K., Campanella, R.G., Gillespie, D. and Greig, J., 1986, “Use of Piezometer Cone Data”, Proceedings of InSitu 86, ASCE Specialty Conference, Blacksburg, Virginia.

Robertson, P.K., 1990, “Soil Classification Using the Cone Penetration Test”, Canadian Geotechnical Journal, Volume 27: 151-158. DOI: 10.1139/T90-014.

Robertson, P.K., 2009, “Interpretation of cone penetration tests – a unified approach”, Canadian Geotechnical Journal, Volume 46: 1337-1355. DOI: 10.1139/T09-065.

Shear wave velocity (Vs) testing is performed in conjunction with the piezocone penetration test (SCPTu) in order to collect interval velocities. For some projects seismic compression wave velocity (Vp) testing is also performed.

ConeTec's piezocone penetrometers are manufactured with one horizontally active geophone (28 hertz) and one vertically active geophone (28 hertz). Both geophones are rigidly mounted in the body of the cone penetrometer, 0.2 meters behind the cone tip. The vertically mounted geophone is more sensitive to compression waves.

Shear waves are typically generated by using an impact hammer horizontally striking a beam that is held in place by a normal load. In some instances, an auger source or an imbedded impulsive source may be used for both shear waves and compression waves. The hammer and beam act as a contact trigger that initiates the recording of the seismic wave traces. For impulsive devices an accelerometer trigger may be used. The traces are recorded in the memory of the cone using a fast analog to digital converter. The seismic trace is then transmitted digitally uphole to a Windows based computer through a signal interface box for recording and analysis. An illustration of the shear wave testing configuration is presented in Figure SCPTu-1.

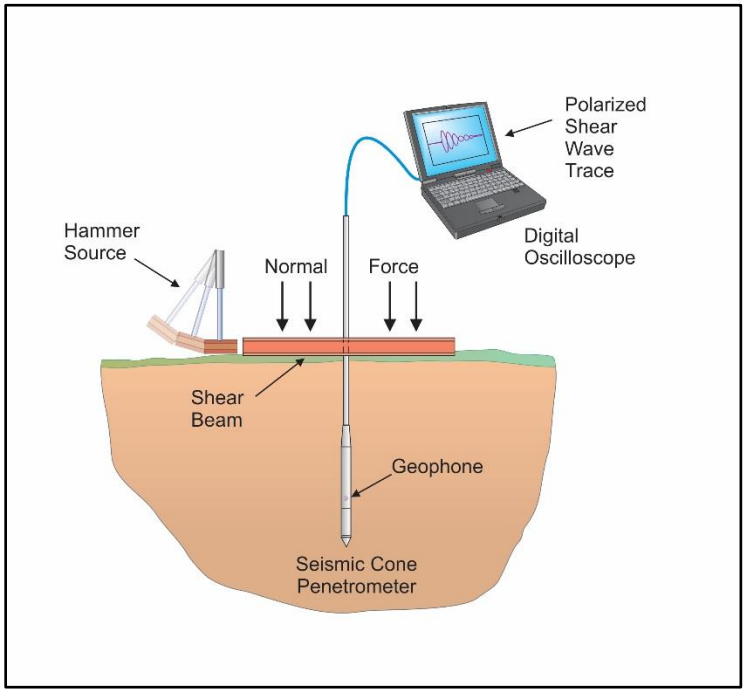


Figure SCPTu-1. Illustration of the SCPTu system

All testing is performed in accordance to ConeTec's SCPTu operating procedures which are in general accordance with the current ASTM D5778 and ASTM D7400 standards.

Prior to the start of a SCPTu sounding, the procedures described in the Cone Penetration Test section are followed. In addition, the active axis of the geophone is aligned parallel to the beam (or source) and the horizontal offset between the cone and the source is measured and recorded.

Prior to recording seismic waves at each test depth, cone penetration is stopped and the rods are decoupled from the rig to avoid transmission of rig energy down the rods. Typically, five wave traces for

each orientation are recorded for quality control and uncertainty analysis purposes. After reviewing wave traces for consistency the cone is pushed to the next test depth (typically one meter intervals or as requested by the client). Figure SCPTu-2 presents an illustration of a SCPTu test.

For additional information on seismic cone penetration testing refer to Robertson et al. (1986).

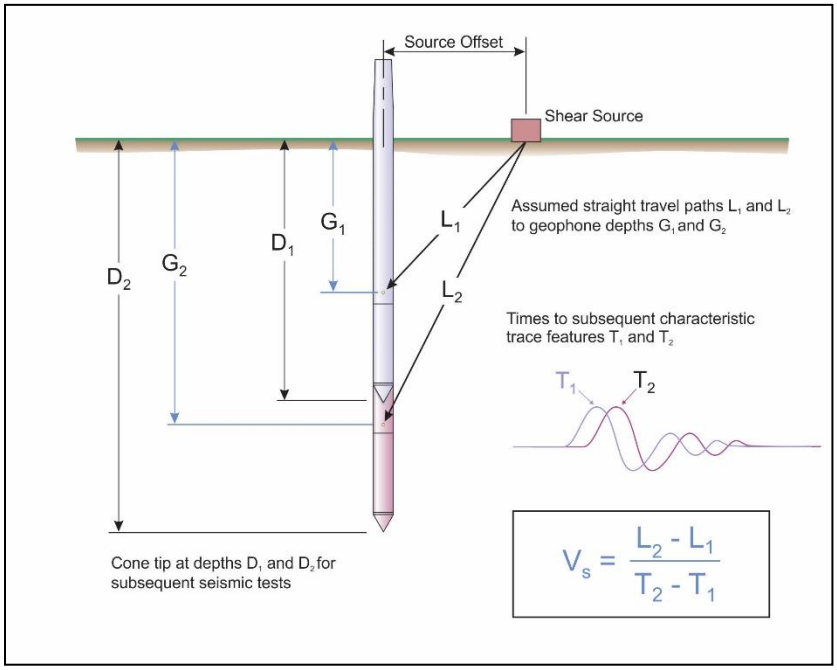


Figure SCPTu-2. Illustration of a seismic cone penetration test

Calculation of the interval velocities are performed by visually picking a common feature (e.g. the first characteristic peak, trough, or crossover) on all of the recorded wave sets and taking the difference in ray path divided by the time difference between subsequent features. Ray path is defined as the straight line distance from the seismic source to the geophone, accounting for beam offset, source depth and geophone offset from the cone tip.

The average shear wave velocity to a depth of thirty meters (V_{s30}) has been calculated and provided for all applicable soundings using an equation presented in Crow et al. (2012).

$$V_{s30} = \frac{\text{total thickness of all layers (30m)}}{\sum(\text{layer traveltimes})}$$

The layer travel times refers to the travel times propagating in the vertical direction, not the measured travel times from an offset source.

Tabular results and SCPTu plots are presented in the relevant appendix.

References

ASTM D5778-20, 2020, "Standard Test Method for Performing Electronic Friction Cone and Piezocone Penetration Testing of Soils", ASTM International, West Conshohocken, PA. DOI: 10.1520/D5778-20.

ASTM D7400/D7400M-19, 2019, "Standard Test Methods for Downhole Seismic Testing", ASTM International, West Conshohocken, PA. DOI: 10.1520/D7400_D7400M-19.

Crow, H.L., Hunter, J.A., Bobrowsky, P.T., 2012, “National shear wave measurement guidelines for Canadian seismic site assessment”, GeoManitoba 2012, Sept 30 to Oct 2, Winnipeg, Manitoba.

Robertson, P.K., Campanella, R.G., Gillespie D and Rice, A., 1986, “Seismic CPT to Measure In-Situ Shear Wave Velocity”, Journal of Geotechnical Engineering ASCE, Vol. 112, No. 8: 791-803. DOI: 10.1061/(ASCE)0733-9410(1986)112:8(791).

To determine the electrical resistivity of the soil (the inverse of electrical conductivity), resistivity measurements are performed in conjunction with piezocone penetration testing (RCPTu) using a resistivity cone. An illustration of the resistivity piezocone penetrometer is presented in Figure RCPTu.

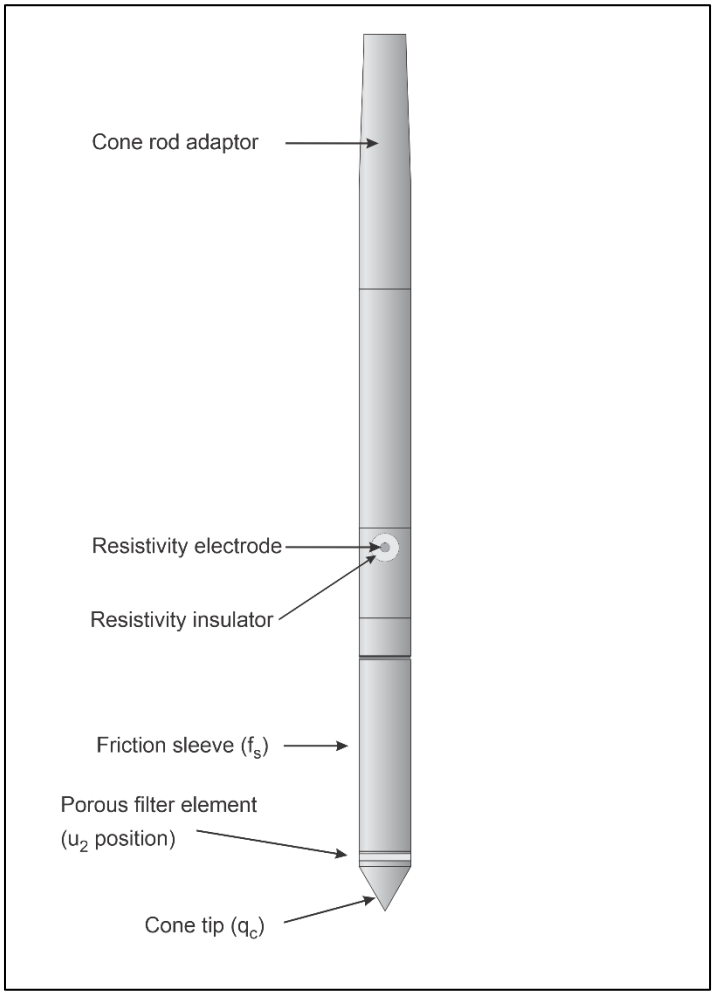


Figure RCPTu. Resistivity piezocone penetrometer (15 cm^2)

The resistivity cone has a single, wear resistant, 8 mm diameter stainless steel electrode set within a 25 mm diameter Delrin plastic insulator. The measurement of resistivity is confined to the region of soil in contact with the electrode and the cone body just beyond the boundary of the insulator. The configuration of the electrode provides vertical resolution of resistivity changes of approximately 25 mm.

The electrical resistance is determined by measuring the voltage drop and current applied across the soil in contact with the electrode and cone body. A 960 hertz alternating current source is used to avoid polarization of the electrode. Polarization is the process where ions accumulate at the electrode thus increasing the measured resistance.

Electrical resistance is not a material property, it is a function of the resistivity of the material being measured, and the electrode configuration. To convert from resistance (ohm) to resistivity (ohm-m) a lab calibration is necessary. Resistivity cones are calibrated in a water tank with solutions of known resistivity. The resistance across the electrode and ground is measured in the various solutions and a calibration

curve is generated. It is necessary to assume that the calibration factors determined in the homogeneous isotropic medium do not vary significantly as the cone is advanced into the ground through soil.

Prior to the start of a test, the procedures described in the cone penetration test section are followed and the resistivity output is verified using various resistors. The resistivity measurements are recorded on a continuous basis at the same time as the tip, friction, and pore pressure measurements. Due to the vertical offset between the cone tip and the electrode, resistivity data is not available for the last 0.275 meters of each profile.

The resistivity of soil is for the most part influenced by the resistivity of the pore fluid, which in turn is a measure of the groundwater chemical composition. Electrical conduction in saturated sandy soils is largely by electrolytic conduction in the pore fluid whereas for clayey soils, ion exchange contributes significantly within the soil skeleton. Resistivity measurements will increase as the saturation of the soil decreases. For additional information on resistivity cone penetration testing, refer to Campanella and Weemees (1990).

Resistivity CPTu plots are presented in the relevant appendix.

References

Campanella, R.G. and Weemees, I., 1990, “Development and Use of an Electrical Resistivity Cone for Groundwater Contamination Studies”, Canadian Geotechnical Journal, Vol. 27 No. 5: 557-567. DOI: 10.1139/T90-071.

The cone penetration test is halted at specific depths to carry out pore pressure dissipation (PPD) tests, shown in Figure PPD-1. For each dissipation test the cone and rods are decoupled from the rig and the data acquisition system measures and records the variation of the pore pressure (u) with time (t).

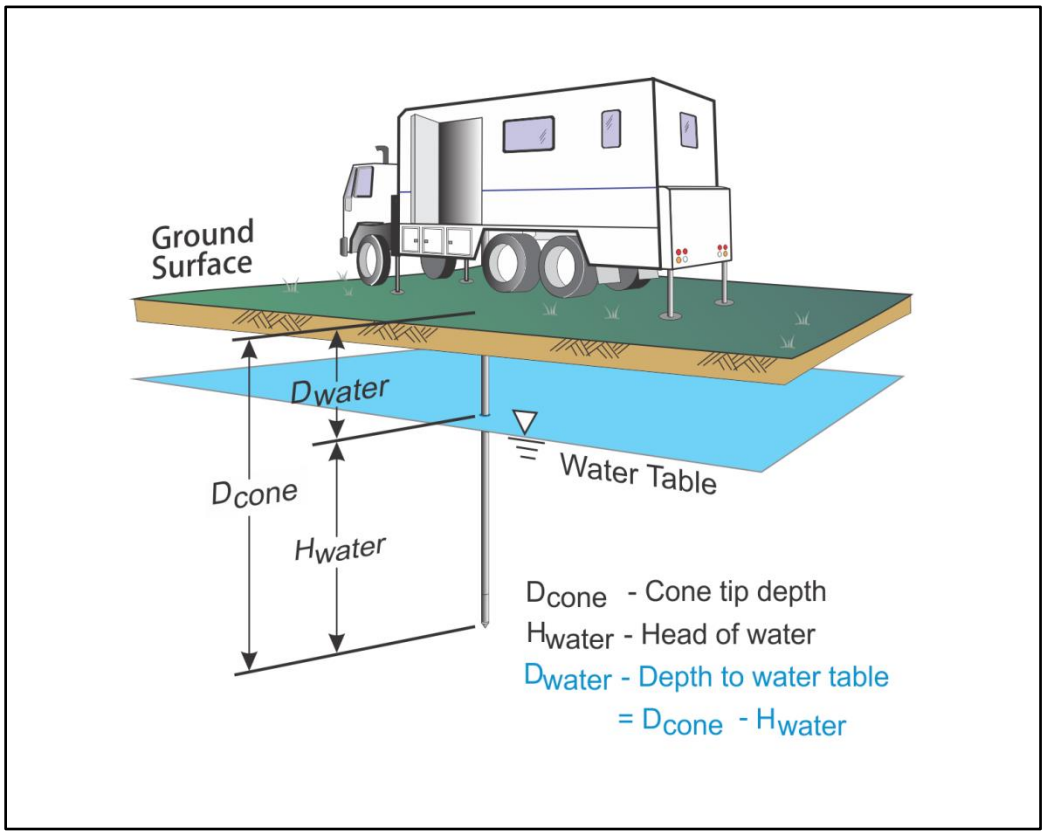


Figure PPD-1. Pore pressure dissipation test setup

Pore pressure dissipation data can be interpreted to provide estimates of ground water conditions, permeability, consolidation characteristics and soil behaviour.

The typical shapes of dissipation curves shown in Figure PPD-2 are very useful in assessing soil type, drainage, in situ pore pressure and soil properties. A flat curve that stabilizes quickly is typical of a freely draining sand. Undrained soils such as clays will typically show positive excess pore pressure and have long dissipation times. Dilative soils will often exhibit dynamic pore pressures below equilibrium that then rise over time. Overconsolidated fine-grained soils will often exhibit an initial dilatory response where there is an initial rise in pore pressure before reaching a peak and dissipating.

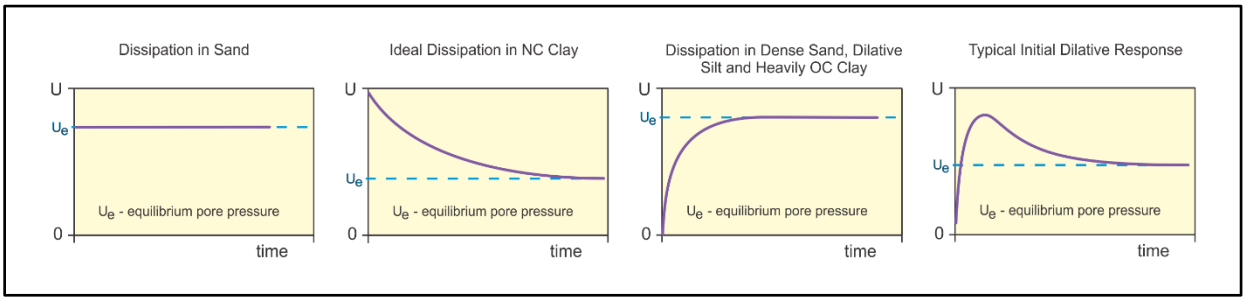


Figure PPD-2. Pore pressure dissipation curve examples

In order to interpret the equilibrium pore pressure (u_{eq}) and the apparent phreatic surface, the pore pressure should be monitored until such time as there is no variation in pore pressure with time as shown for each curve in Figure PPD-2.

In fine grained deposits the point at which 100% of the excess pore pressure has dissipated is known as t_{100}. In some cases this can take an excessive amount of time and it may be impractical to take the dissipation to t_{100}. A theoretical analysis of pore pressure dissipations by Teh and Houlsby (1991) showed that a single curve relating degree of dissipation versus theoretical time factor (T*) may be used to calculate the coefficient of consolidation (c_h) at various degrees of dissipation resulting in the expression for c_h shown below.

$$c_h = \frac{T^* \cdot a^2 \cdot \sqrt{I_r}}{t}$$

Where:

T* is the dimensionless time factor (Table Time Factor)
a is the radius of the cone
I_r is the rigidity index
t is the time at the degree of consolidation

Table Time Factor. T* versus degree of dissipation (Teh and Houlsby (1991))

Degree of Dissipation (%)	20	30	40	50	60	70	80
T* (u_2)	0.038	0.078	0.142	0.245	0.439	0.804	1.60

The coefficient of consolidation is typically analyzed using the time (t_{50}) corresponding to a degree of dissipation of 50% (u_{50}). In order to determine t_{50}, dissipation tests must be taken to a pressure less than u_{50}. The u_{50} value is half way between the initial maximum pore pressure and the equilibrium pore pressure value, known as u_{100}. To estimate u_{50}, both the initial maximum pore pressure and u_{100} must be known or estimated. Other degrees of dissipations may be considered, particularly for extremely long dissipations.

At any specific degree of dissipation the equilibrium pore pressure (u at t_{100}) must be estimated at the depth of interest. The equilibrium value may be determined from one or more sources such as measuring the value directly (u_{100}), estimating it from other dissipations in the same profile, estimating the phreatic surface and assuming hydrostatic conditions, from nearby soundings, from client provided information, from site observations and/or past experience, or from other site instrumentation.

For calculations of c_h (Teh and Houlsby (1991)), t_{50} values are estimated from the corresponding pore pressure dissipation curve and a rigidity index (I_r) is assumed. For curves having an initial dilatory response in which an initial rise in pore pressure occurs before reaching a peak, the relative time from the peak value is used in determining t_{50}. In cases where the time to peak is excessive, t_{50} values are not calculated.

Due to possible inherent uncertainties in estimating I_r, the equilibrium pore pressure and the effect of an initial dilatory response on calculating t_{50}, other methods should be applied to confirm the results for c_h.

Additional published methods for estimating the coefficient of consolidation from a piezocone test are described in Burns and Mayne (1998, 2002), Jones and Van Zyl (1981), Robertson et al. (1992) and Sully et al. (1999).

A summary of the pore pressure dissipation tests and dissipation plots are presented in the relevant appendix.

References

Burns, S.E. and Mayne, P.W., 1998, "Monotonic and dilatory pore pressure decay during piezocone tests", Canadian Geotechnical Journal 26 (4): 1063-1073. DOI: 1063-1073/T98-062.

Burns, S.E. and Mayne, P.W., 2002, "Analytical cavity expansion-critical state model cone dissipation in fine-grained soils", Soils & Foundations, Vol. 42(2): 131-137.

Jones, G.A. and Van Zyl, D.J.A., 1981, "The piezometer probe: a useful investigation tool", Proceedings, 10th International Conference on Soil Mechanics and Foundation Engineering, Vol. 3, Stockholm: 489-495.

Robertson, P.K., Sully, J.P., Woeller, D.J., Lunne, T., Powell, J.J.M. and Gillespie, D.G., 1992, "Estimating coefficient of consolidation from piezocone tests", Canadian Geotechnical Journal, 29(4): 539-550. DOI: 10.1139/T92-061.

Sully, J.P., Robertson, P.K., Campanella, R.G. and Woeller, D.J., 1999, "An approach to evaluation of field CPTU dissipation data in overconsolidated fine-grained soils", Canadian Geotechnical Journal, 36(2): 369-381. DOI: 10.1139/T98-105.

Teh, C.I., and Houlsby, G.T., 1991, "An analytical study of the cone penetration test in clay", Geotechnique, 41(1): 17-34. DOI: 10.1680/geot.1991.41.1.17.

The appendices listed below are included in the report:

- Cone Penetration Test Summary and Standard Cone Penetration Test Plots
- Resistivity Cone Penetration Test Plots
- Advanced Cone Penetration Test Plots with Ic, Su(Nkt) and N1(60)Ic
- Seismic Cone Penetration Test Plots
- Seismic Cone Penetration Test Shear Wave (Vs) Tabular Results
- Seismic Cone Penetration Test Shear Wave (Vs) Traces
- Soil Behaviour Type (SBT) Scatter Plots
- Pore Pressure Dissipation Summary and Pore Pressure Dissipation Plots
- Description of Methods for Calculated CPT Geotechnical Parameters

Cone Penetration Test Summary and Standard Cone Penetration Test Plots

CONETEC

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CONE PENETRATION TEST SUMMARY

Sounding ID	File Name	Date	Cone	Cone Area (cm^2)	Assumed Phreatic Surface[1] (m)	Final Depth (m)	Northing[2] (m)	Easting[2] (m)	Elevation[3] (m)	Refer to Notation Number
RSCPT22-22CPT100	22-02-23796_RS22-22CPT100	19-Mar-2022	750:T1500F15U35	15	2.0	15.725	5612601.80	413774.10		
RCPT22-22CPT101	22-02-23796_RP22-22CPT101	19-Mar-2022	750:T1500F15U35	15	2.0	12.550	5612600.80	413873.30		
RCPT22-22CPT102	22-02-23796_RP22-22CPT102	19-Mar-2022	651:T1500F15U35	15	2.0	9.925	5612599.10	413972.50		
RSCPT22-22CPT103	22-02-23796_RS22-22CPT103	19-Mar-2022	651:T1500F15U35	15	2.2	4.975	5612597.80	414068.60		3
RCPT22-22CPT104	22-02-23796_RP22-22CPT104	19-Mar-2022	651:T1500F15U35	15	4.9	10.350	5612596.30	414170.80		3
RCPT22-22CPT105	22-02-23796_RP22-22CPT105	20-Mar-2022	651:T1500F15U35	15	2.0	6.100	5612600.00	414270.90		
RSCPT22-22CPT106	22-02-23796_RS22-22CPT106	20-Mar-2022	651:T1500F15U35	15	2.0	7.000	5612599.30	414320.70		
RCPT22-22CPT107	22-02-23796_RP22-22CPT107	20-Mar-2022	651:T1500F15U35	15	2.0	5.525	5612598.60	414368.60		
RCPT22-22CPT107A	22-02-23796_RP22-22CPT107A	20-Mar-2022	750:T1500F15U35	15	2.0	8.225	5612616.00	414367.00		
RCPT22-22CPT108	22-02-23796_RP22-22CPT108	20-Mar-2022	750:T1500F15U35	15	2.0	10.050	5612596.50	414520.10		
RSCPT22-22CPT109	22-02-23796_RS22-22CPT109	22-Mar-2022	750:T1500F15U35	15	3.5	9.175	5612595.80	414569.10		
RCPT22-22CPT110	22-02-23796_RP22-22CPT110	21-Mar-2022	750:T1500F15U35	15		2.800	5612594.40	414669.10		
RCPT22-22CPT110A	22-02-23796_RP22-22CPT110A	21-Mar-2022	750:T1500F15U35	15		0.775	5612594.40	414669.10		
RCPT22-22CPT110B	22-02-23796_RP22-22CPT110B	21-Mar-2022	750:T1500F15U35	15	2.9	6.275	5612594.40	414669.10		
RCPT22-22CPT111	22-02-23796_RP22-22CPT111	21-Mar-2022	750:T1500F15U35	15	2.4	7.700	5612593.00	414769.10		3
RSCPT22-22CPT112	22-02-23796_RS22-22CPT112	21-Mar-2022	750:T1500F15U35	15	1.7	6.500	5612591.60	414870.90		3
RCPT22-22CPT113	22-02-23796_RP22-22CPT113	21-Mar-2022	750:T1500F15U35	15	2.0	11.925	5612590.10	414971.30		
RCPT22-22CPT114	22-02-23796_RP22-22CPT114	22-Mar-2022	750:T1500F15U35	15	4.8	9.850	5612586.90	415072.50		
RSCPT22-22CPT115	22-02-23796_RS22-22CPT115	15-Apr-2022	822:T1000F10U35	15	2.6	12.025	5612567.05	415167.92	776.26	
RCPT22-22CPT117	22-02-23796_RP22-22CPT117	14-Apr-2022	822:T1000F10U35	15	2.7	10.950	5612564.88	415269.27	775.22	
RCPT22-22CPT118	22-02-23796_RP22-22CPT118	23-Mar-2022	750:T1500F15U35	15	2.7	10.675	5612565.40	415321.20		
RCPT22-22CPT119	22-02-23796_RP22-22CPT119	23-Mar-2022	750:T1500F15U35	15	1.4	10.450	5612560.80	415369.40		
RCPT22-22CPT120	22-02-23796_RP22-22CPT120	22-Mar-2022	750:T1500F15U35	15	4.1	9.300	5612552.90	415421.00		3
RSCPT22-22CPT121	22-02-23796_RS22-22CPT121	22-Mar-2022	750:T1500F15U35	15	1.2	7.000	5612552.20	415467.10		
RCPT22-22CPT122	22-02-23796_RP22-22CPT122	14-Apr-2022	822:T1000F10U35	15	1.2	6.500	5612546.00	415510.00	772.30	

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CONE PENETRATION TEST SUMMARY

Sounding ID	File Name	Date	Cone	Cone Area (cm^2)	Assumed Phreatic Surface[1] (m)	Final Depth (m)	Northing[2] (m)	Easting[2] (m)	Elevation[3] (m)	Refer to Notation Number
RCPT22-22CPT123	22-02-23796_RP22-22CPT123	14-Apr-2022	822:T1000F10U35	15	0.3	4.750	5612544.99	415571.60	771.60	
RCPT22-22CPT123B	22-02-23796_RP22-22CPT123B	14-Apr-2022	822:T1000F10U35	15	0.3	12.025	5612545.00	415569.00	771.60	
RCPT22-22CPT124	22-02-23796_RP22-22CPT124	14-Apr-2022	822:T1000F10U35	15	1.0	8.950	5612542.04	415619.71	770.90	
RCPT22-22CPT125	22-02-23796_RP22-22CPT125	14-Apr-2022	822:T1000F10U35	15	1.0	10.025	5612539.94	415670.81	770.69	
RCPT22-22CPT126	22-02-23796_RP22-22CPT126	23-Mar-2022	750:T1500F15U35	15	2.0	9.750	5612538.20	415719.60		
RSCPT22-22CPT127	22-02-23796_RS22-22CPT127	23-Mar-2022	750:T1500F15U35	15	3.9	10.475	5612536.60	415770.50		3
RCPT22-22CPT128	22-02-23796_RP22-22CPT128	23-Mar-2022	750:T1500F15U35	15	3.5	10.175	5612535.50	415819.60		3
RCPT22-22CPT129	22-02-23796_RP22-22CPT129	14-Apr-2022	821:T1000F10U35	15	2.8	3.825	5612534.34	415870.44	769.47	
RCPT22-22CPT129B	22-02-23796_RP22-22CPT129B	14-Apr-2022	821:T1000F10U35	15	2.8	3.800	5612534.00	415868.00	769.50	
RCPT22-22CPT129C	22-02-23796_RP22-22CPT129C	14-Apr-2022	822:T1000F10U35	15	2.8	3.750	5612534.00	415868.00	769.50	
RCPT22-22CPT130	22-02-23796_RP22-22CPT130	13-Apr-2022	821:T1000F10U35	15	3.2	9.425	5612533.24	415919.55	769.33	
RCPT22-22CPT131	22-02-23796_RP22-22CPT131	23-Mar-2022	750:T1500F15U35	15	4.1	11.225	5612532.20	415966.90		3
RSCPT22-22CPT131	22-02-23796_RS22-22CPT131E	15-Apr-2022	822:T1000F10U35	15	2.3	9.625	5612505.40	416389.00		
RSCPT22-22CPT131	22-02-23796_RS22-22CPT131N	15-Apr-2022	822:T1000F10U35	15	1.7	9.900	5612506.40	416388.00		
RSCPT22-22CPT131	22-02-23796_RS22-22CPT131S1	15-Apr-2022	822:T1000F10U35	15	2.5	9.775	5612504.40	416388.00		
RSCPT22-22CPT131	22-02-23796_RS22-22CPT131S2	15-Apr-2022	822:T1000F10U35	15	1.7	9.825	5612500.40	416388.00		
RCPT22-22CPT132	22-02-23796_RP22-22CPT132	23-Mar-2022	750:T1500F15U35	15	2.7	9.225	5612531.00	416019.60		3
RSCPT22-22CPT133	22-02-23796_RS22-22CPT133	24-Mar-2022	750:T1500F15U35	15	2.0	9.100	5612529.90	416070.40		
RCPT22-22CPT134	22-02-23796_RP22-22CPT134	24-Mar-2022	750:T1500F15U35	15	2.2	9.925	5612528.80	416119.60		
RCPT22-22CPT135	22-02-23796_RP22-22CPT135	24-Mar-2022	750:T1500F15U35	15	2.0	10.825	5612527.60	416170.40		
RCPT22-22CPT136	22-02-23796_RP22-22CPT136	24-Mar-2022	750:T1500F15U35	15	3.0	12.025	5612526.50	416219.60		
RCPT22-22CPT137	22-02-23796_RP22-22CPT137	24-Mar-2022	750:T1500F15U35	15	2.0	9.675	5612525.40	416270.30		
RSCPT22-22CPT138	22-02-23796_RS22-22CPT138	24-Mar-2022	854:T1500F15U35	15	2.5	8.500	5612524.30	416319.50		
RCPT22-22CPT139	22-02-23796_RP22-22CPT139	24-Mar-2022	854:T1500F15U35	15	2.8	9.000	5612523.10	416370.30		
RCPT22-22CPT140	22-02-23796_RP22-22CPT140	24-Mar-2022	854:T1500F15U35	15	3.5	8.900	5612522.00	416419.40		3

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CONE PENETRATION TEST SUMMARY

Sounding ID	File Name	Date	Cone	Cone Area (cm^2)	Assumed Phreatic Surface[1] (m)	Final Depth (m)	Northing[2] (m)	Easting[2] (m)	Elevation[3] (m)	Refer to Notation Number
RCPT22-22CPT141	22-02-23796_RP22-22CPT141	25-Mar-2022	854:T1500F15U35	15	1.6	7.500	5612520.90	416470.30		3
RCPT22-22CPT142	22-02-23796_RP22-22CPT142	25-Mar-2022	854:T1500F15U35	15	2.0	7.825	5612519.80	416519.40		
RCPT22-22CPT143	22-02-23796_RP22-22CPT143	25-Mar-2022	854:T1500F15U35	15	2.1	7.325	5612518.70	416570.30		
RSCPT22-22CPT144	22-02-23796_RS22-22CPT144	25-Mar-2022	854:T1500F15U35	15	1.5	8.625	5612515.50	416627.00		
RCPT22-22CPT145	22-02-23796_RP22-22CPT145	25-Mar-2022	854:T1500F15U35	15	1.5	7.750	5612505.20	416673.90		
RCPT22-22CPT146	22-02-23796_RP22-22CPT146	20-Mar-2022	651:T1500F15U35	15	2.0	7.675	5612615.31	414208.88		
RCPT22-22CPT147	22-02-23796_RP22-22CPT147	20-Mar-2022	651:T1500F15U35	15	2.0	9.625	5612613.11	414308.86		
RCPT22-22CPT148	22-02-23796_RP22-22CPT148	20-Mar-2022	750:T1500F15U35	15	2.8	9.175	5612609.15	414408.81		3
RCPT22-22CPT149	22-02-23796_RP22-22CPT149	22-Mar-2022	750:T1500F15U35	15	2.7	6.000	5612607.10	414508.79		
RCPT22-22CPT150	22-02-23796_RP22-22CPT150	22-Mar-2022	750:T1500F15U35	15	2.0	8.700	5612609.63	414608.84		3
RCPT22-22CPT151	22-02-23796_RP22-22CPT151	21-Mar-2022	750:T1500F15U35	15	2.6	6.300	5612606.15	414708.80		3
RCPT22-22CPT152	22-02-23796_RP22-22CPT152	21-Mar-2022	750:T1500F15U35	15	3.9	5.775	5612602.89	414808.76		
RCPT22-22CPT153	22-02-23796_RP22-22CPT153	21-Mar-2022	750:T1500F15U35	15		2.350	5612603.73	414908.78		
RCPT22-22CPT153A	22-02-23796_RP22-22CPT153A	21-Mar-2022	750:T1500F15U35	15	2.5	9.050	5612603.73	414908.78		
RCPT22-22CPT154	22-02-23796_RP22-22CPT154	21-Mar-2022	750:T1500F15U35	15	3.0	9.225	5612607.10	414508.79		
RCPT22-22CPT155	22-02-23796_RP22-22CPT155	22-Mar-2022	750:T1500F15U35	15	3.3	8.900	5612604.00	415109.60		3
RCPT22-22CPT156	22-02-23796_RP22-22CPT156	22-Mar-2022	750:T1500F15U35	15	1.8	10.200	5612602.00	415210.10		
RCPT22-22CPT157	22-02-23796_RP22-22CPT157	22-Mar-2022	750:T1500F15U35	15	1.9	5.175	5612596.00	415310.60		
RCPT22-22CPT158	22-02-23796_RP22-22CPT158	22-Mar-2022	750:T1500F15U35	15	2.0	8.825	5612590.00	415410.60		
RCPT22-22CPT160	22-02-23796_RP22-22CPT160	14-Apr-2022	822:T1000F10U35	15	3.2	9.800	5612583.80	415609.14	771.02	
RCPT22-22CPT161	22-02-23796_RP22-22CPT161	23-Mar-2022	750:T1500F15U35	15		1.125	5612582.00	415708.30		
RCPT22-22CPT161A	22-02-23796_RP22-22CPT161A	23-Mar-2022	750:T1500F15U35	15		1.325	5612582.00	415708.30		
RCPT22-22CPT161B	22-02-23796_RP22-22CPT161B	23-Mar-2022	750:T1500F15U35	15	2.0	9.675	5612582.00	415708.30		3
RCPT22-22CPT162	22-02-23796_RP22-22CPT162	23-Mar-2022	750:T1500F15U35	15	2.0	10.350	5612580.00	415807.80		
RCPT22-22CPT163	22-02-23796_RP22-22CPT163	14-Apr-2022	821:T1000F10U35	15	2.6	8.800	5612580.91	415907.87	769.20	

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CONE PENETRATION TEST SUMMARY

Sounding ID	File Name	Date	Cone	Cone Area (cm^2)	Assumed Phreatic Surface[1] (m)	Final Depth (m)	Northing[2] (m)	Easting[2] (m)	Elevation[3] (m)	Refer to Notation Number
RCPT22-22CPT164	22-02-23796_RP22-22CPT164	23-Mar-2022	750:T1500F15U35	15	1.7	9.075	5612579.00	416007.80		
RCPT22-22CPT165	22-02-23796_RP22-22CPT165	13-Apr-2022	821:T1000F10U35	15	1.1	8.700	5612572.71	416107.74	769.87	
RCPT22-22CPT166	22-02-23796_RP22-22CPT166	24-Mar-2022	750:T1500F15U35	15	4.6	10.525	5612572.00	416207.80		3
RCPT22-22CPT167	22-02-23796_RP22-22CPT167	24-Mar-2022	854:T1500F15U35	15	2.0	9.575	5612569.00	416307.70		
RCPT22-22CPT168	22-02-23796_RP22-22CPT168	24-Mar-2022	854:T1500F15U35	15	2.4	9.225	5612566.00	416407.70		3
RCPT22-22CPT169	22-02-23796_RP22-22CPT169	25-Mar-2022	854:T1500F15U35	15	2.0	8.925	5612567.76	416507.73		
RCPT22-22CPT170	22-02-23796_RP22-22CPT170	25-Mar-2022	854:T1500F15U35	15	1.1	9.100	5612569.00	416610.10		3
RCPT22-22CPT200	22-02-23796_RP22-22CPT200	25-Mar-2022	854:T1500F15U35	15	1.2	7.125	5612486.10	416721.60		
RCPT22-22CPT201	22-02-23796_RP22-22CPT201	25-Mar-2022	854:T1500F15U35	15	3.0	6.075	5612453.90	416772.10		3
RCPT22-22CPT202	22-02-23796_RP22-22CPT202	26-Mar-2022	854:T1500F15U35	15	2.0	9.300	5612419.70	416808.80		3
RCPT22-22CPT203	22-02-23796_RP22-22CPT203	29-Mar-2022	854:T1500F15U35	15	2.0	11.200	5612375.40	416842.10		
RSCPT22-22CPT204	22-02-23796_RS22-22CPT204	29-Mar-2022	854:T1500F15U35	15	1.8	5.975	5612317.60	416869.60		
RCPT22-22CPT205	22-02-23796_RP22-22CPT205	29-Mar-2022	854:T1500F15U35	15	1.5	9.475	5612266.20	416882.70		3
RCPT22-22CPT206	22-02-23796_RP22-22CPT206	29-Mar-2022	854:T1500F15U35	15	1.9	7.300	5612209.30	416886.40		3
RCPT22-22CPT207	22-02-23796_RP22-22CPT207	29-Mar-2022	854:T1500F15U35	15	1.7	6.400	5612156.60	416885.10		
RCPT22-22CPT208	22-02-23796_RP22-22CPT208	29-Mar-2022	854:T1500F15U35	15	1.0	5.575	5612109.30	416884.00		
RSCPT22-22CPT209	22-02-23796_RS22-22CPT209	29-Mar-2022	854:T1500F15U35	15	1.5	5.675	5612056.60	416882.70		
RCPT22-22CPT210	22-02-23796_RP22-22CPT210	29-Mar-2022	854:T1500F15U35	15	2.7	5.850	5612007.60	416881.40		3
RCPT22-22CPT211	22-02-23796_RP22-22CPT211	29-Mar-2022	854:T1500F15U35	15	2.8	8.375	5611956.60	416880.20		
RCPT22-22CPT212	22-02-23796_RP22-22CPT212	29-Mar-2022	854:T1500F15U35	15	2.6	7.775	5611907.60	416879.00		3
RCPT22-22CPT213	22-02-23796_RP22-22CPT213	30-Mar-2022	854:T1500F15U35	15	2.7	12.025	5611856.60	416877.70		3
RCPT22-22CPT214	22-02-23796_RP22-22CPT214	30-Mar-2022	854:T1500F15U35	15	4.0	7.000	5611809.50	416876.60		3
RSCPT22-22CPT215	22-02-23796_RS22-22CPT215	30-Mar-2022	854:T1500F15U35	15	4.7	7.025	5611756.70	416875.30		
RCPT22-22CPT216	22-02-23796_RP22-22CPT216	30-Mar-2022	854:T1500F15U35	15	4.8	11.850	5611707.60	416874.00		
RCPT22-22CPT217	22-02-23796_RP22-22CPT217	30-Mar-2022	854:T1500F15U35	15	5.0	10.875	5611656.70	416872.80		

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CONE PENETRATION TEST SUMMARY

Sounding ID	File Name	Date	Cone	Cone Area (cm^2)	Assumed Phreatic Surface[1] (m)	Final Depth (m)	Northing[2] (m)	Easting[2] (m)	Elevation[3] (m)	Refer to Notation Number
RCPT22-22CPT218	22-02-23796_RP22-22CPT218	30-Mar-2022	854:T1500F15U35	15	3.8	9.575	5611607.60	416871.60		3
RCPT22-22CPT219	22-02-23796_RP22-22CPT219	30-Mar-2022	854:T1500F15U35	15	2.6	11.475	5611556.70	416870.30		3
RCPT22-22CPT220	22-02-23796_RP22-22CPT220	30-Mar-2022	854:T1500F15U35	15		0.850	5611508.00	416869.00		
RCPT22-22CPT220B	22-02-23796_RP22-22CPT220B	30-Mar-2022	854:T1500F15U35	15	1.9	12.025	5611509.00	416869.00		
RSCPT22-22CPT221	22-02-23796_RS22-22CPT221	30-Mar-2022	854:T1500F15U35	15	2.0	10.450	5611456.70	416867.90		
RPCPT22-22CPT222	22-02-23796_RP22-22CPT222	31-Mar-2022	854:T1500F15U35	15	1.6	12.025	5611407.80	416866.60		
RPCPT22-22CPT223	22-02-23796_RP22-22CPT223	31-Mar-2022	854:T1500F15U35	15	1.5	11.025	5611356.80	416865.40		
RPCPT22-22CPT224	22-02-23796_RP22-22CPT224	31-Mar-2022	854:T1500F15U35	15	0.7	11.275	5611308.00	416864.20		3
RCPT22-22CPT225	22-02-23796_RP22-22CPT225	13-Apr-2022	821:T1000F10U35	15	0.5	9.225	5611256.80	416862.90		
RPCPT22-22CPT226	22-02-23796_RP22-22CPT226	31-Mar-2022	854:T1500F15U35	15	0.5	9.050	5611208.00	416861.70		
RSCPT22-22CPT227	22-02-23796_RS22-22CPT227	31-Mar-2022	854:T1500F15U35	15	2.5	9.125	5611149.70	416860.30		
RCPT22-22CPT228	22-02-23796_RP22-22CPT228	31-Mar-2022	854:T1500F15U35	15		0.875	5611109.00	416859.50		
RCPT22-22CPT228B	22-02-23796_RP22-22CPT228B	31-Mar-2022	854:T1500F15U35	15		3.300	5611107.00	416859.50		
RCPT22-22CPT228C	22-02-23796_RP22-22CPT228C	31-Mar-2022	854:T1500F15U35	15	3.7	6.550	5611105.00	416859.50		
RCPT22-22CPT229	22-02-23796_RP22-22CPT229	31-Mar-2022	854:T1500F15U35	15	3.6	6.625	5611057.80	416859.10		
RCPT22-22CPT230	22-02-23796_RP22-22CPT230	31-Mar-2022	854:T1500F15U35	15	2.2	9.100	5611007.80	416858.90		
RCPT22-22CPT231	22-02-23796_RP22-22CPT231	26-Mar-2022	854:T1500F15U35	15		1.850	5610957.80	416858.70		
RCPT22-22CPT231A	22-02-23796_RP22-22CPT231A	26-Mar-2022	854:T1500F15U35	15	2.5	7.100	5610957.80	416858.70		3
RCPT22-22CPT232	22-02-23796_RP22-22CPT232	26-Mar-2022	854:T1500F15U35	15	2.0	8.400	5610906.80	416858.50		
RSCPT22-22CPT233	22-02-23796_RS22-22CPT233	26-Mar-2022	854:T1500F15U35	15	2.0	9.150	5610857.80	416858.30		
RCPT22-22CPT234	22-02-23796_RP22-22CPT234	26-Mar-2022	854:T1500F15U35	15	2.7	11.150	5610801.80	416858.10		
RCPT22-22CPT235	22-02-23796_RP22-22CPT235	26-Mar-2022	854:T1500F15U35	15	3.0	6.650	5610757.80	416858.00		
RCPT22-22CPT236	22-02-23796_RP22-22CPT236	26-Mar-2022	854:T1500F15U35	15	3.0	7.125	5610704.90	416857.80		
RCPT22-22CPT237	22-02-23796_RP22-22CPT237	26-Mar-2022	854:T1500F15U35	15	3.5	7.350	5610658.40	416857.60		
RCPT22-22CPT238	22-02-23796_RP22-22CPT238	27-Mar-2022	854:T1500F15U35	15	3.2	12.050	5610602.80	416856.80		3

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CONE PENETRATION TEST SUMMARY

Sounding ID	File Name	Date	Cone	Cone Area (cm^2)	Assumed Phreatic Surface[1] (m)	Final Depth (m)	Northing[2] (m)	Easting[2] (m)	Elevation[3] (m)	Refer to Notation Number
RSCPT22-22CPT239	22-02-23796_RS22-22CPT239	27-Mar-2022	854:T1500F15U35	15	4.0	12.025	5610549.70	416855.50		3
RCPT22-22CPT240	22-02-23796_RP22-22CPT240	27-Mar-2022	854:T1500F15U35	15	3.2	11.950	5610504.70	416854.30		3
RCPT22-22CPT241	22-02-23796_RP22-22CPT241	27-Mar-2022	854:T1500F15U35	15	4.0	7.325	5610456.70	416853.00		3
RCPT22-22CPT242	22-02-23796_RP22-22CPT242	27-Mar-2022	854:T1500F15U35	15	4.0	10.925	5610402.80	416851.50		
RCPT22-22CPT243	22-02-23796_RP22-22CPT243	27-Mar-2022	854:T1500F15U35	15		3.725	5610357.50	416850.30		
RCPT22-22CPT243A	22-02-23796_RP22-22CPT243A	27-Mar-2022	854:T1500F15U35	15	4.0	10.775	5610357.50	416850.30		3
RCPT22-22CPT244	22-02-23796_RP22-22CPT244	27-Mar-2022	854:T1500F15U35	15	4.0	11.250	5610306.50	416848.80		3
RSCPT22-22CPT245	22-02-23796_RS22-22CPT245	27-Mar-2022	854:T1500F15U35	15	3.1	11.875	5610257.40	416847.50		3
RCPT22-22CPT246	22-02-23796_RP22-22CPT246	01-Apr-2022	854:T1500F15U35	15	1.5	5.550	5610205.50	416846.10		
RCPT22-22CPT247	22-02-23796_RP22-22CPT247	02-Apr-2022	854:T1500F15U35	15	0.5	8.725	5610157.70	416844.80		
RCPT22-22CPT248	22-02-23796_RP22-22CPT248	02-Apr-2022	854:T1500F15U35	15	0.5	10.875	5610103.80	416843.80		
RCPT22-22CPT249	22-02-23796_RP22-22CPT249	02-Apr-2022	854:T1500F15U35	15	2.3	12.000	5610059.60	416843.50		
RCPT22-22CPT250	22-02-23796_RP22-22CPT250	02-Apr-2022	854:T1500F15U35	15	3.5	6.950	5610008.90	416838.40		
RCPT22-22CPT251	22-02-23796_RP22-22CPT251	02-Apr-2022	854:T1500F15U35	15	2.5	7.350	5609959.90	416838.30		
RSCPT22-22CPT252	22-02-23796_RS22-22CPT252	02-Apr-2022	854:T1500F15U35	15	0.7	12.025	5609909.00	416838.30		
RCPT22-22CPT253	22-02-23796_RP22_22CPT253	04-Apr-2022	854:T1500F15U35	15	1.0	12.025	5609859.90	416838.20		
RCPT22-22CPT254	22-02-23796_RP22-22CPT254	04-Apr-2022	854:T1500F15U35	15	0.2	12.025	5609808.90	416838.20		
RCPT22-22CPT255	22-02-23796_RP22-22CPT255	04-Apr-2022	854:T1500F15U35	15	1.6	8.825	5609731.10	416835.00		
RSCPT22-22CPT256	22-02-23796_RS22-22CPT256	04-Apr-2022	854:T1500F15U35	15	1.5	8.125	5609680.65	416828.26	768.53	
RCPT22-22CPT257	22-02-23796_RP22-22CPT257	04-Apr-2022	854:T1500F15U35	15	1.8	8.650	5609636.50	416809.78	768.29	
RCPT22-22CPT258	22-02-23796_RP22-22CPT258	04-Apr-2022	854:T1500F15U35	15	1.7	9.475	5609596.04	416784.68	768.06	
RCPT22-22CPT259	22-02-23796_RP22-22CPT259	25-Mar-2022	854:T1500F15U35	15	1.2	8.250	5612543.00	416724.00		
RCPT22-22CPT260	22-02-23796_RP22-22CPT260	25-Mar-2022	854:T1500F15U35	15	1.5	7.825	5612481.00	416823.20		
RCPT22-22CPT261	22-02-23796_RP22-22CPT261	13-Apr-2022	821:T1000F10U35	15	1.7	12.025	5612388.73	416895.87	767.46	
RCPT22-22CPT262	22-02-23796_RP22-22CPT262	13-Apr-2022	821:T1000F10U35	15	1.5	5.950	5612278.12	416934.46	767.46	

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CONE PENETRATION TEST SUMMARY

Sounding ID	File Name	Date	Cone	Cone Area (cm^2)	Assumed Phreatic Surface[1] (m)	Final Depth (m)	Northing[2] (m)	Easting[2] (m)	Elevation[3] (m)	Refer to Notation Number
RCPT22-22CPT263	22-02-23796_RP22-22CPT263	13-Apr-2022	821:T1000F10U35	15	1.3	5.575	5612168.10	416937.52	767.25	
RCPT22-22CPT264	22-02-23796_RP22-22CPT264	13-Apr-2022	821:T1000F10U35	15	1.6	7.200	5612068.14	416934.26	767.73	
RCPT22-22CPT265	22-02-23796_RP22-22CPT265	12-Apr-2022	821:T1000F10U35	15	3.1	6.850	5611968.27	416923.39	768.60	
RCPT22-22CPT266	22-02-23796_RP22-22CPT266	12-Apr-2022	821:T1000F10U35	15	2.0	6.825	5611868.24	416928.01	767.83	
RCPT22-22CPT267	22-02-23796_RP22-22CPT267	12-Apr-2022	821:T1000F10U35	15	4.3	12.025	5611768.35	416922.70	769.14	
RCPT22-22CPT269	22-02-23796_RP22-22CPT269	12-Apr-2022	821:T1000F10U35	15	1.5	5.800	5611568.41	416917.06	768.00	
RCPT22-22CPT270	22-02-23796_RP22-22CPT270	12-Apr-2022	821:T1000F10U35	15	2.1	11.200	5611468.28	416921.41	768.47	
RCPT22-22CPT271	22-02-23796_RP22-22CPT271	12-Apr-2022	821:T1000F10U35	15	1.4	8.550	5611368.13	416928.98	765.26	
RCPT22-22CPT272	22-02-23796_RP22-22CPT272	13-Apr-2022	821:T1000F10U35	15	0.6	9.250	5611268.11	416927.32	764.16	
RCPT22-22CPT273	22-02-23796_RP22-22CPT273	13-Apr-2022	821:T1000F10U35	15	0.7	5.475	5611168.26	416915.47	765.34	
RCPT22-22CPT274	22-02-23796_RP22-22CPT274	31-Mar-2022	854:T1500F15U35	15	3.0	6.175	5611069.35	416913.83		
RCPT22-22CPT275	22-02-23796_RP22-22CPT275	01-Apr-2022	854:T1500F15U35	15	2.7	8.000	5610969.50	416913.81		
RCPT22-22CPT276	22-02-23796_RP22-22CPT276	01-Apr-2022	854:T1500F15U35	15	1.6	3.675	5610969.49	416916.45		
RCPT22-22CPT276B	22-02-23796_RP22-22CPT276B	01-Apr-2022	854:T1500F15U35	15	1.6	9.150	5610969.49	416916.45		
RCPT22-22CPT277	22-02-23796_RP22-22CPT277	01-Apr-2022	854:T1500F15U35	15	2.4	5.825	5610769.50	416912.44		
RCPT22-22CPT278	22-02-23796_RP22-22CPT278	01-Apr-2022	854:T1500F15U35	15	3.4	6.700	5610669.40	416910.29		
RCPT22-22CPT279	22-02-23796_RP22-22CPT279	01-Apr-2022	854:T1500F15U35	15	3.5	5.900	5610568.39	416907.57		
RCPT22-22CPT280	22-02-23796_RP22-22CPT280	01-Apr-2022	854:T1500F15U35	15	3.7	12.025	5610468.36	416904.03		
RCPT22-22CPT281	22-02-23796_RP22-22CPT281	29-Mar-2022	854:T1500F15U35	15	1.2	7.675	5610368.27	416905.93		
RCPT22-22CPT282	22-02-23796_RP22-22CPT282	01-Apr-2022	854:T1500F15U35	15	1.0	10.325	5610268.36	416901.41		
RCPT22-22CPT283	22-02-23796_RP22-22CPT283	01-Apr-2022	854:T1500F15U35	15	1.0	12.025	5610168.37	416903.24		
RCPT22-22CPT284	22-02-23796_RP22-22CPT284	02-Apr-2022	854:T1500F15U35	15	1.8	10.075	5610069.56	416898.27		
RCPT22-22CPT285	22-02-23796_RP22-22CPT285	02-Apr-2022	854:T1500F15U35	15	2.1	6.225	5609969.83	416892.69		
RCPT22-22CPT286	22-02-23796_RP22-22CPT286	04-Apr-2022	854:T1500F15U35	15	0.4	10.775	5609869.82	416898.09		
RCPT22-22CPT287	22-02-23796_RP22_22CPT287	04-Apr-2022	854:T1500F15U35	15	2.0	6.375	5609769.17	416895.12		

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CONE PENETRATION TEST SUMMARY

Sounding ID	File Name	Date	Cone	Cone Area (cm^2)	Assumed Phreatic Surface[1] (m)	Final Depth (m)	Northing[2] (m)	Easting[2] (m)	Elevation[3] (m)	Refer to Notation Number
RCPT22-22CPT288	22-02-23796_RP22-22CPT288	04-Apr-2022	854:T1500F15U35	15	1.9	8.350	5609654.93	416872.36	768.55	3
RCPT22-22CPT300	22-02-23796_RP22-22CPT300	05-Apr-2022	854:T1500F15U35	15	1.5	10.325	5609541.41	416732.61	768.19	
RCPT22-22CPT301	22-02-23796_RP22-22CPT301	05-Apr-2022	854:T1500F15U35	15		0.725	5609513.64	416692.20	769.45	
RCPT22-22CPT301B	22-02-23796_RP22-22CPT301B	05-Apr-2022	854:T1500F15U35	15	1.5	12.025	5609511.00	416692.00	769.40	
RSCPT22-22CPT302	22-02-23796_RS22-22CPT302	05-Apr-2022	854:T1500F15U35	15	1.5	12.075	5609492.10	416645.80	769.02	
RCPT22-22CPT303	22-02-23796_RP22-22CPT303	05-Apr-2022	854:T1500F15U35	15	1.2	11.425	5609478.83	416597.30	768.79	
RCPT22-22CPT304	22-02-23796_RP22-22CPT304	05-Apr-2022	854:T1500F15U35	15	2.0	12.025	5609473.98	416542.26	770.05	
RCPT22-22CPT305	22-02-23796_RP22-22CPT305	05-Apr-2022	854:T1500F15U35	15	4.5	12.025	5609474.10	416493.15	770.91	3
RCPT22-22CPT306	22-02-23796_RP22-22CPT306	06-Apr-2022	854:T1500F15U35	15	2.0	10.225	5609474.27	416443.07	770.59	
RCPT22-22CPT307	22-02-23796_RP22-22CPT307	06-Apr-2022	854:T1500F15U35	15	1.0	8.950	5609474.41	416394.15	770.32	
RSCPT22-22CPT308	22-02-23796_RS22-22CPT308	06-Apr-2022	854:T1500F15U35	15	3.1	11.075	5609474.56	416343.07	770.65	3
RCPT22-22CPT309	22-02-23796_RP22-22CPT309	06-Apr-2022	854:T1500F15U35	15	3.5	12.000	5609474.69	416294.15	771.19	
RCPT22-22CPT310	22-02-23796_RP22-22CPT310	06-Apr-2022	854:T1500F15U35	15	3.6	9.200	5609474.85	416243.06	771.39	3
RCPT22-22CPT311	22-02-23796_RP22-22CPT311	06-Apr-2022	854:T1500F15U35	15	0.7	10.000	5609474.98	416194.16	771.24	
RCPT22-22CPT312	22-02-23796_RP22-22CPT312	06-Apr-2022	854:T1500F15U35	15	3.0	10.800	5609475.03	416142.96	771.38	3
RCPT22-22CPT313	22-02-23796_RP22-22CPT313	07-Apr-2022	854:T1500F15U35	15	3.5	9.850	5609475.41	416099.25	771.57	
RSCPT22-22CPT314	22-02-23796_RS22-22CPT314	07-Apr-2022	854:T1500F15U35	15	2.7	10.225	5609474.30	416042.76	771.59	3
RCPT22-22CPT315	22-02-23796_RP22-22CPT315	07-Apr-2022	854:T1500F15U35	15	3.3	9.925	5609473.53	415990.34	771.93	
RCPT22-22CPT316	22-02-23796_RP22-22CPT316	07-Apr-2022	854:T1500F15U35	15	1.0	10.600	5609472.60	415942.66	772.45	
RCPT22-22CPT317	22-02-23796_RP22-22CPT317	07-Apr-2022	854:T1500F15U35	15	1.3	10.450	5609471.39	415892.95	773.89	3
RCPT22-22CPT318	22-02-23796_RP22-22CPT318	07-Apr-2022	854:T1500F15U35	15	1.5	8.950	5609470.05	415842.68	772.84	
RCPT22-22CPT319	22-02-23796_RP22-22CPT319	08-Apr-2022	854:T1500F15U35	15	1.2	8.000	5609468.66	415790.42	772.62	
RSCPT22-22CPT320	22-02-23796_RS22-22CPT320	08-Apr-2022	854:T1500F15U35	15	3.8	8.175	5609467.42	415742.78	773.06	
RCPT22-22CPT321	22-02-23796_RP22-22CPT321	08-Apr-2022	854:T1500F15U35	15	3.9	7.700	5609466.26	415699.00	773.42	
RCPT22-22CPT322	22-02-23796_RP22-22CPT322	08-Apr-2022	854:T1500F15U35	15	1.5	8.175	5609464.77	415642.89	773.80	

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CONE PENETRATION TEST SUMMARY

Sounding ID	File Name	Date	Cone	Cone Area (cm^2)	Assumed Phreatic Surface[1] (m)	Final Depth (m)	Northing[2] (m)	Easting[2] (m)	Elevation[3] (m)	Refer to Notation Number
RCPT22-22CPT323	22-02-23796_RP22-22CPT323	08-Apr-2022	854:T1500F15U35	15	3.3	9.250	5609463.45	415593.30	774.10	
RCPT22-22CPT324	22-02-23796_RP22-22CPT324	08-Apr-2022	854:T1500F15U35	15	2.5	6.025	5609462.00	415543.00	773.96	
RCPT22-22CPT325	22-02-23796_RP22-22CPT325	08-Apr-2022	854:T1500F15U35	15	0.8	8.250	5609460.73	415490.40	774.17	
RCPT22-22CPT326	22-02-23796_RP22-22CPT326	09-Apr-2022	854:T1500F15U35	15	0.5	7.250	5609459.48	415443.09	773.98	
RCPT22-22CPT327	22-02-23796_RP22-22CPT327	09-Apr-2022	854:T1500F15U35	15	0.5	7.975	5609458.19	415393.63	774.32	
RSCPT22-22CPT328	22-02-23796_RS22-22CPT328	09-Apr-2022	854:T1500F15U35	15	2.4	9.325	5609457.07	415343.14	774.73	
RCPT22-22CPT329	22-02-23796_RP22-22CPT329	09-Apr-2022	854:T1500F15U35	15	1.9	9.950	5609456.21	415293.91	775.16	
RCPT22-22CPT330	22-02-23796_RP22-22CPT330	09-Apr-2022	854:T1500F15U35	15	1.7	8.225	5609455.60	415240.11	776.81	3
RCPT22-22CPT331	22-02-23796_RP22-22CPT331	09-Apr-2022	854:T1500F15U35	15	1.1	9.675	5609455.14	415193.97	778.71	3
RCPT22-22CPT332	22-02-23796_RP22-22CPT332	11-Apr-2022	854:T1500F15U35	15	2.0	9.150	5609454.66	415143.11	777.24	
RCPT22-22CPT333	22-02-23796_RP22-22CPT333	11-Apr-2022	854:T1500F15U35	15	0.5	8.975	5609454.21	415093.95	775.05	
RSCPT22-22CPT334	22-02-23796_RS22-22CPT334	11-Apr-2022	750:T1500F15U35	15	2.3	8.725	5609453.73	415043.12	774.77	
RCPT22-22CPT335	22-02-23796_RP22-22CPT335	11-Apr-2022	750:T1500F15U35	15		3.075	5609435.28	414992.98	776.34	
RCPT22-22CPT335B	22-02-23796_RP22-22CPT335B	11-Apr-2022	821:T1000F10U35	15	3.2	10.025	5609435.00	414990.00	776.30	
RCPT22-22CPT336	22-02-23796_RP22-22CPT336	11-Apr-2022	821:T1000F10U35	15	0.5	9.825	5609452.80	414943.16	776.13	
RCPT22-22CPT337	22-02-23796_RP22-22CPT337	11-Apr-2022	821:T1000F10U35	15	3.8	8.925	5609452.35	414893.03	776.17	
RCPT22-22CPT338	22-02-23796_RP22-22CPT338	12-Apr-2022	821:T1000F10U35	15	4.1	7.950	5609451.86	414843.18	777.33	
RSCPT22-22CPT339	22-02-23796_RS22-22CPT339	12-Apr-2022	821:T1000F10U35	15	5.7	12.025	5609450.94	414743.20	782.13	
RCPT22-22CPT340	22-02-23796_RP22-22CPT340	05-Apr-2022	854:T1500F15U35	15	1.7	10.925	5609553.12	416816.08	767.99	
RCPT22-22CPT341	22-02-23796_RP22-22CPT341	05-Apr-2022	854:T1500F15U35	15	1.3	11.575	5609478.28	416727.35	768.08	
RCPT22-22CPT343	22-02-23796_RP22-22CPT343	05-Apr-2022	854:T1500F15U35	15	2.7	12.025	5609429.50	416510.15	770.02	3
RCPT22-22CPT344	22-02-23796_RP22-22CPT344	06-Apr-2022	854:T1500F15U35	15	1.5	9.125	5609430.50	416410.15	770.34	3
RCPT22-22CPT345	22-02-23796_RP22-22CPT345	06-Apr-2022	854:T1500F15U35	15	1.5	8.100	5609432.55	416310.66	770.99	
RCPT22-22CPT346	22-02-23796_RP22-22CPT346	06-Apr-2022	854:T1500F15U35	15	1.7	9.750	5609433.72	416210.16	771.33	
RCPT22-22CPT347	22-02-23796_RP22-22CPT347	07-Apr-2022	854:T1500F15U35	15	4.7	11.500	5609435.01	416110.51	771.90	

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CONE PENETRATION TEST SUMMARY

Sounding ID	File Name	Date	Cone	Cone Area (cm^2)	Assumed Phreatic Surface[1] (m)	Final Depth (m)	Northing[2] (m)	Easting[2] (m)	Elevation[3] (m)	Refer to Notation Number
RCPT22-22CPT348	22-02-23796_RP22-22CPT348	07-Apr-2022	854:T1500F15U35	15	3.2	8.800	5609434.25	416010.89	771.57	
RCPT22-22CPT350	22-02-23796_RP22-22CPT350	07-Apr-2022	854:T1500F15U35	15	2.0	8.675	5609432.58	415811.32	772.58	
RCPT22-22CPT351	22-02-23796_RP22-22CPT351	08-Apr-2022	854:T1500F15U35	15	1.8	7.550	5609431.94	415711.29	772.96	
RCPT22-22CPT352	22-02-23796_RP22-22CPT352	08-Apr-2022	854:T1500F15U35	15	2.0	8.100	5609431.42	415611.28	773.68	
RCPT22-22CPT353	22-02-23796_RP22-22CPT353	08-Apr-2022	854:T1500F15U35	15		0.950	5609429.21	415511.30	774.10	
RCPT22-22CPT353B	22-02-23796_RP22-22CPT353B	08-Apr-2022	854:T1500F15U35	15		0.900	5609427.00	415511.00	774.10	
RCPT22-22CPT353C	22-02-23796_RP22-22CPT353C	08-Apr-2022	854:T1500F15U35	15	2.1	9.625	5609425.00	415511.00	774.00	
RCPT22-22CPT354	22-02-23796_RP22-22CPT354	09-Apr-2022	854:T1500F15U35	15	0.5	6.800	5609426.28	415411.33	774.08	
RCPT22-22CPT355	22-02-23796_RP22-22CPT355	09-Apr-2022	854:T1500F15U35	15	3.0	9.075	5609426.33	415311.01	775.42	
RCPT22-22CPT356	22-02-23796_RP22-22CPT356	09-Apr-2022	854:T1500F15U35	15	2.3	10.225	5609435.14	415210.69	778.74	
RCPT22-22CPT357	22-02-23796_RP22-22CPT357	11-Apr-2022	854:T1500F15U35	15	3.0	10.850	5609426.00	415113.00	776.00	
RCPT22-22CPT358	22-02-23796_RP22-22CPT358	11-Apr-2022	750:T1500F15U35	15	4.9	11.850	5609425.47	415010.78	776.05	
RCPT22-22CPT359	22-02-23796_RP22-22CPT359	11-Apr-2022	821:T1000F10U35	15	0.5	8.075	5609425.57	414910.78	776.61	
RCPT22-22CPT360	22-02-23796_RP22-22CPT360	12-Apr-2022	821:T1000F10U35	15	2.0	9.900	5609431.44	414810.73	778.73	


1. The assumed phreatic surface was based on the dynamic pore pressure response. Hydrostatic conditions were assumed for the calculated parameters.
2. Coordinates were provided by the client. Coordinate system: UTM 12 North.
3. The assumed phreatic surface was based on pore pressure dissipation tests.

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 09:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT100
Cone: 750:T1500F15U35 Area= 15cm2

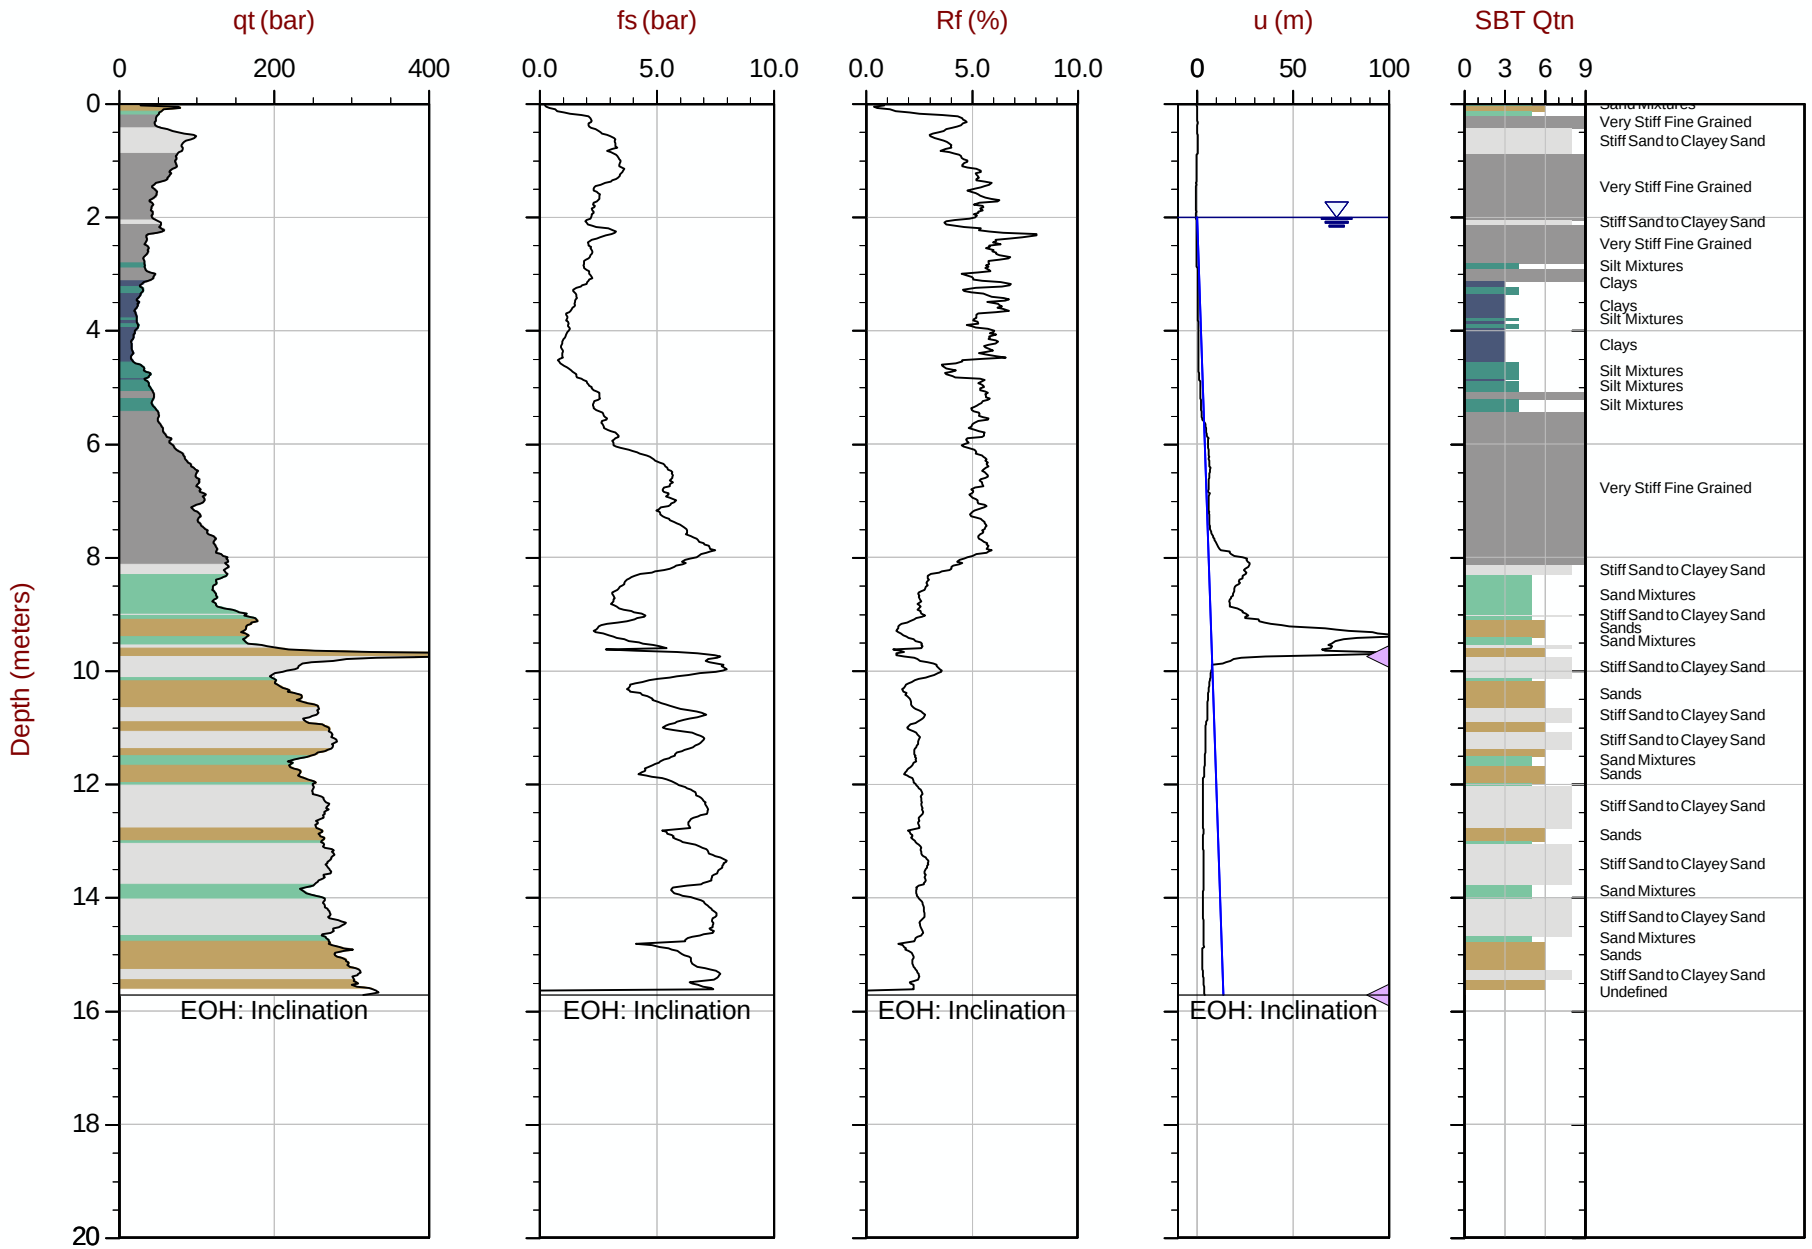

Max Depth: 15.725 m / 51.59 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT100.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612602m E: 413774m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 11:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT101
Cone: 750:T1500F15U35 Area= 15cm2

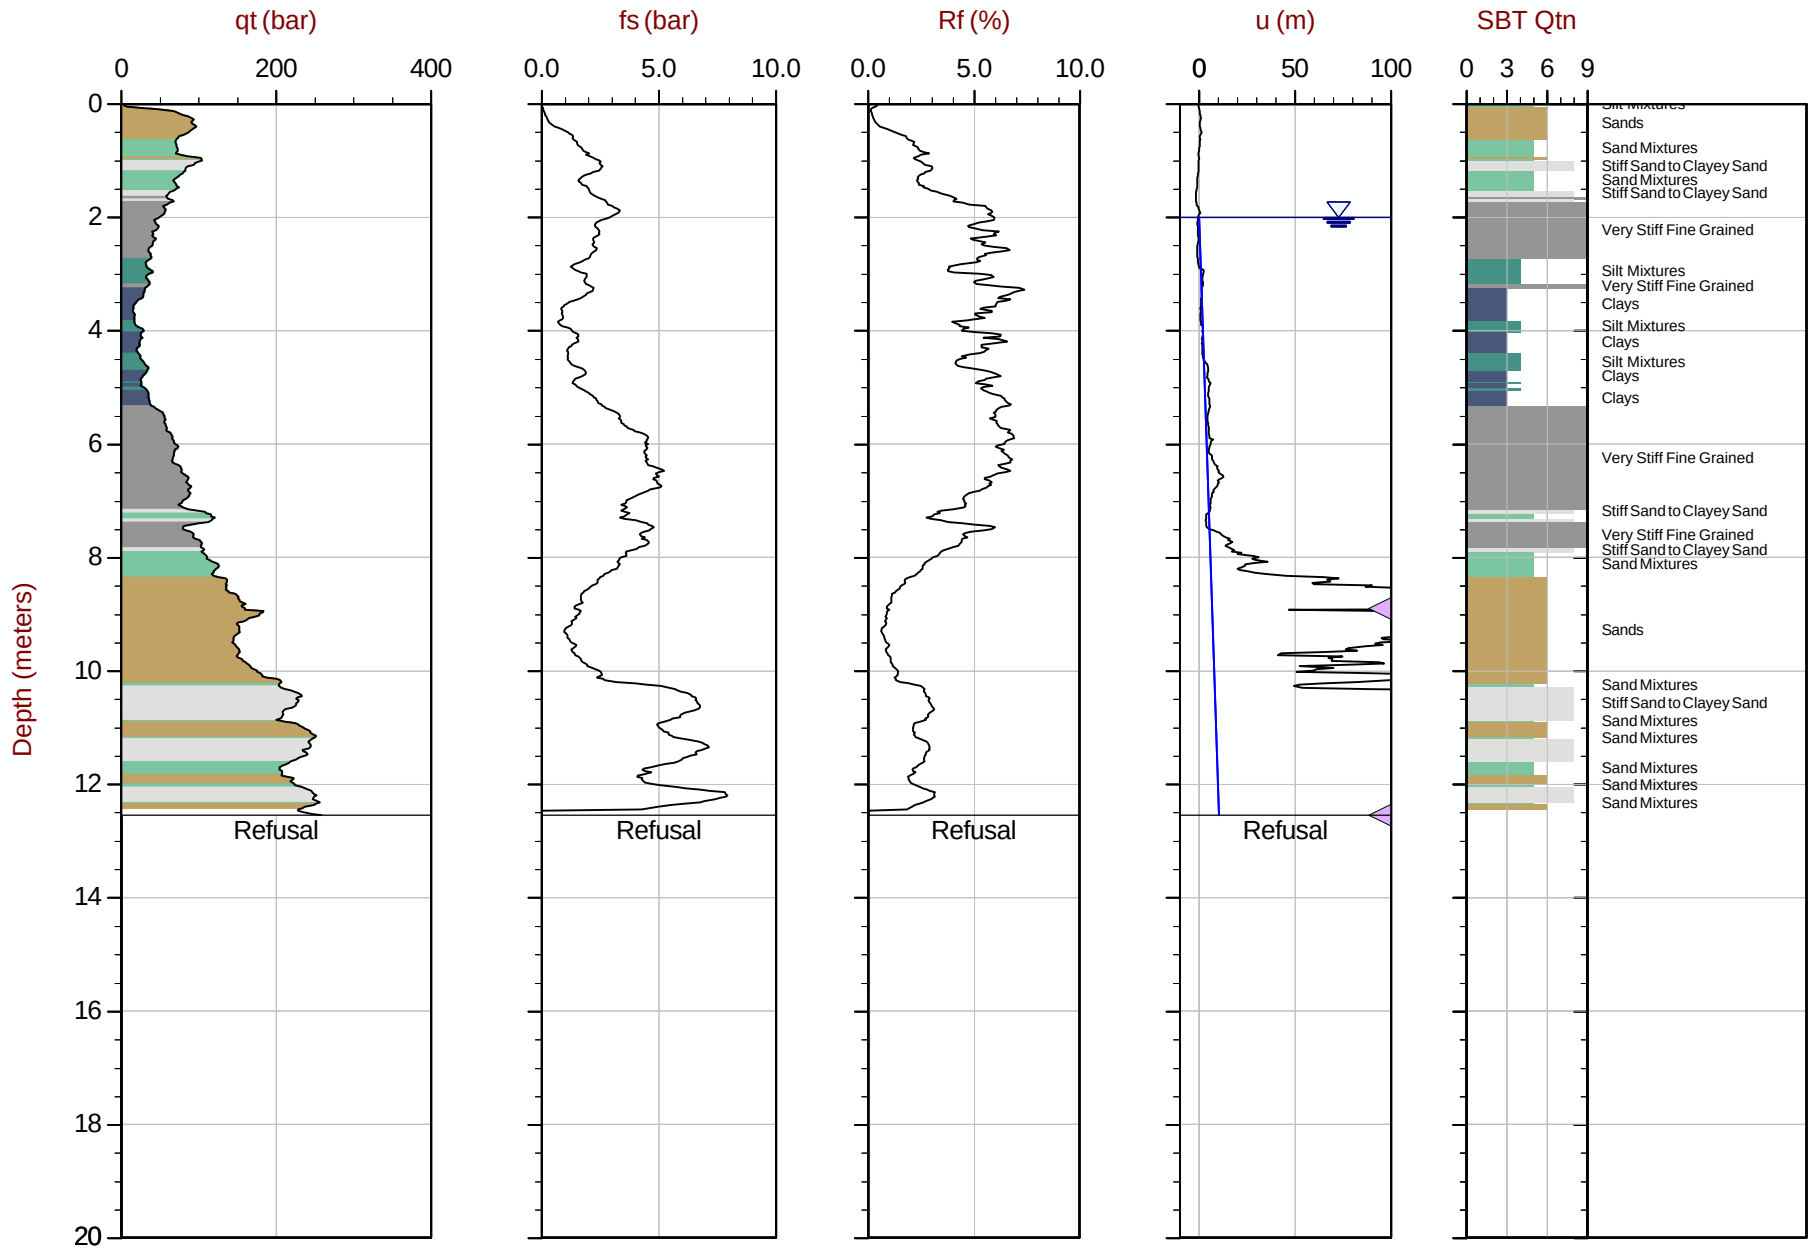

Max Depth: 12.550 m / 41.17 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT101.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612601m E: 413873m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 13:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT102
Cone: 651:T1500F15U35 Area= 15cm2

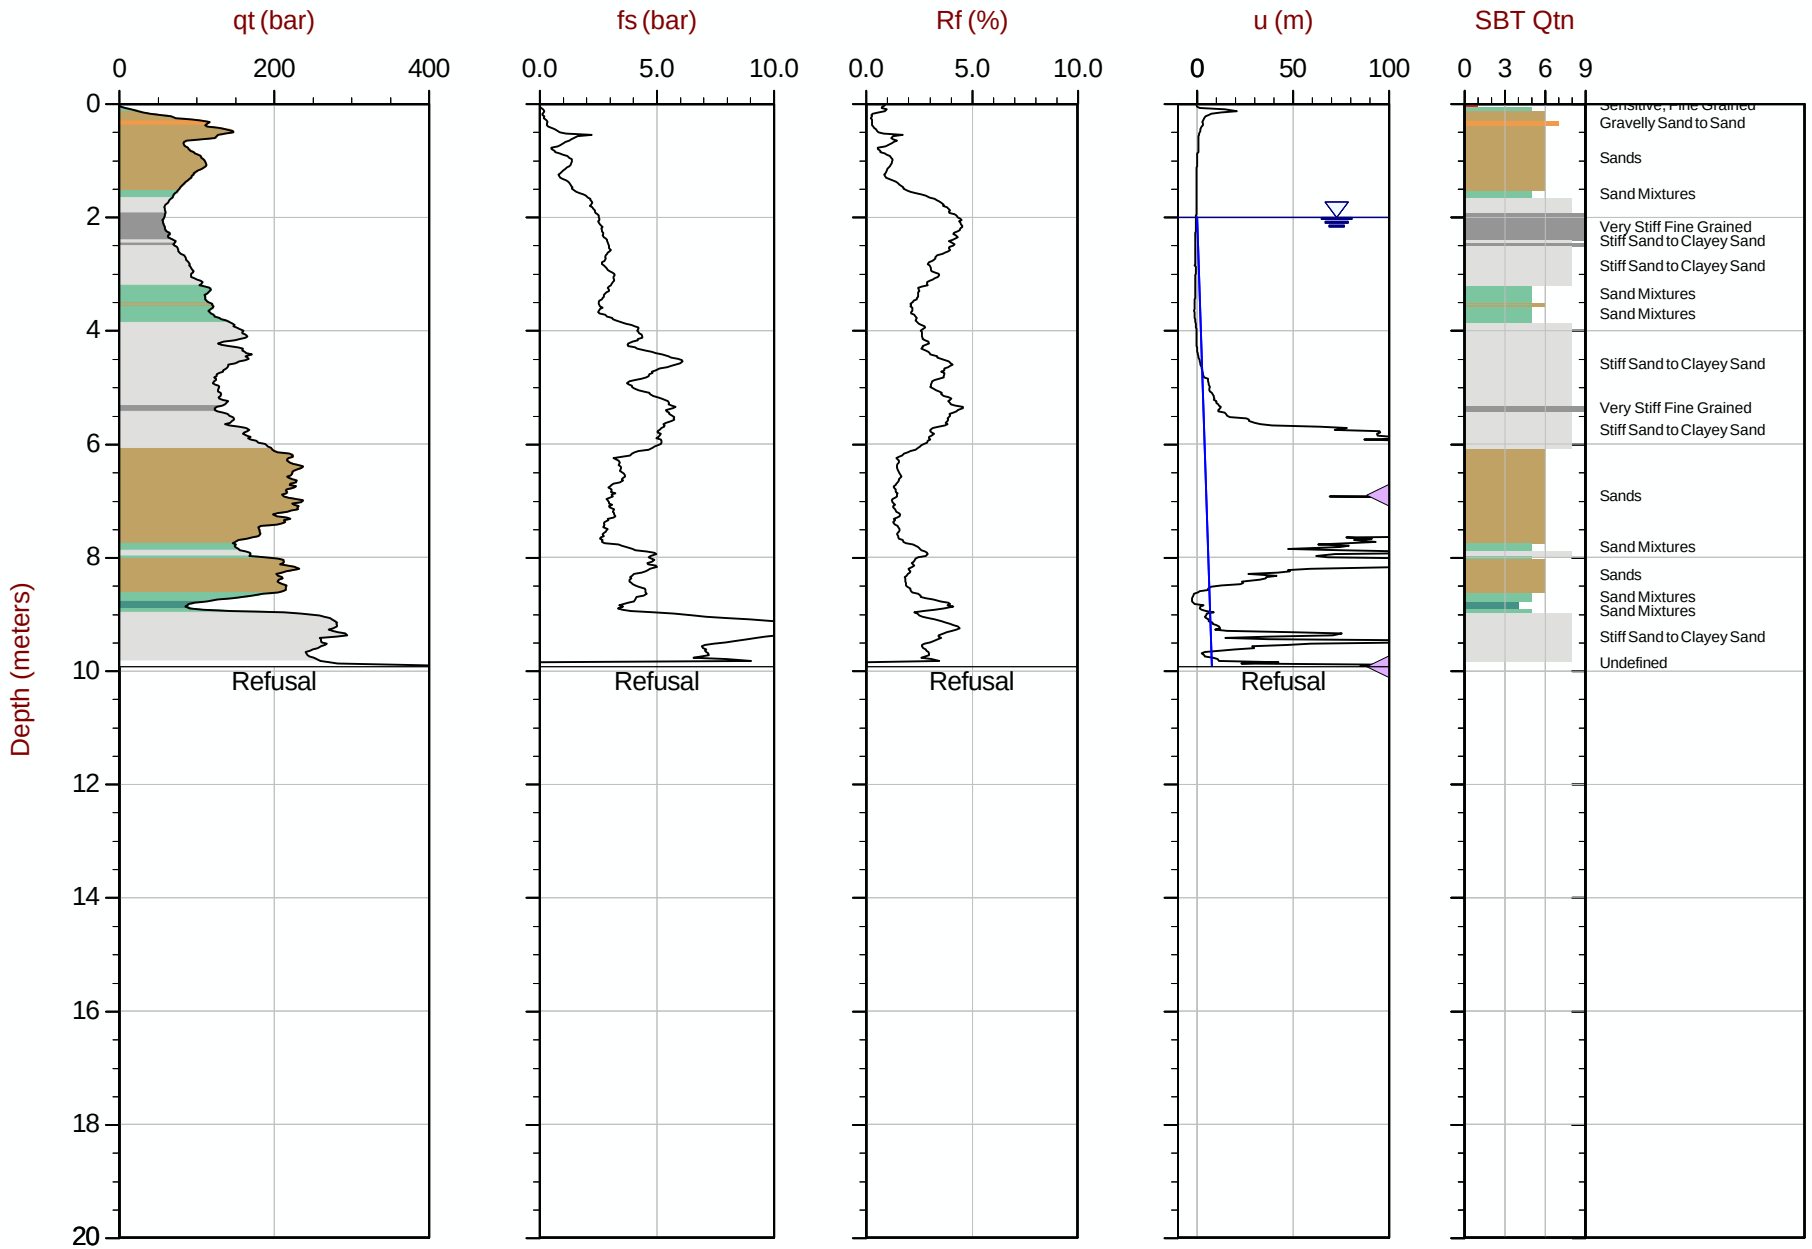

Max Depth: 9.925 m / 32.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT102.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612599m E: 413972m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 15:27
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT103
Cone: 651:T1500F15U35 Area= 15cm2

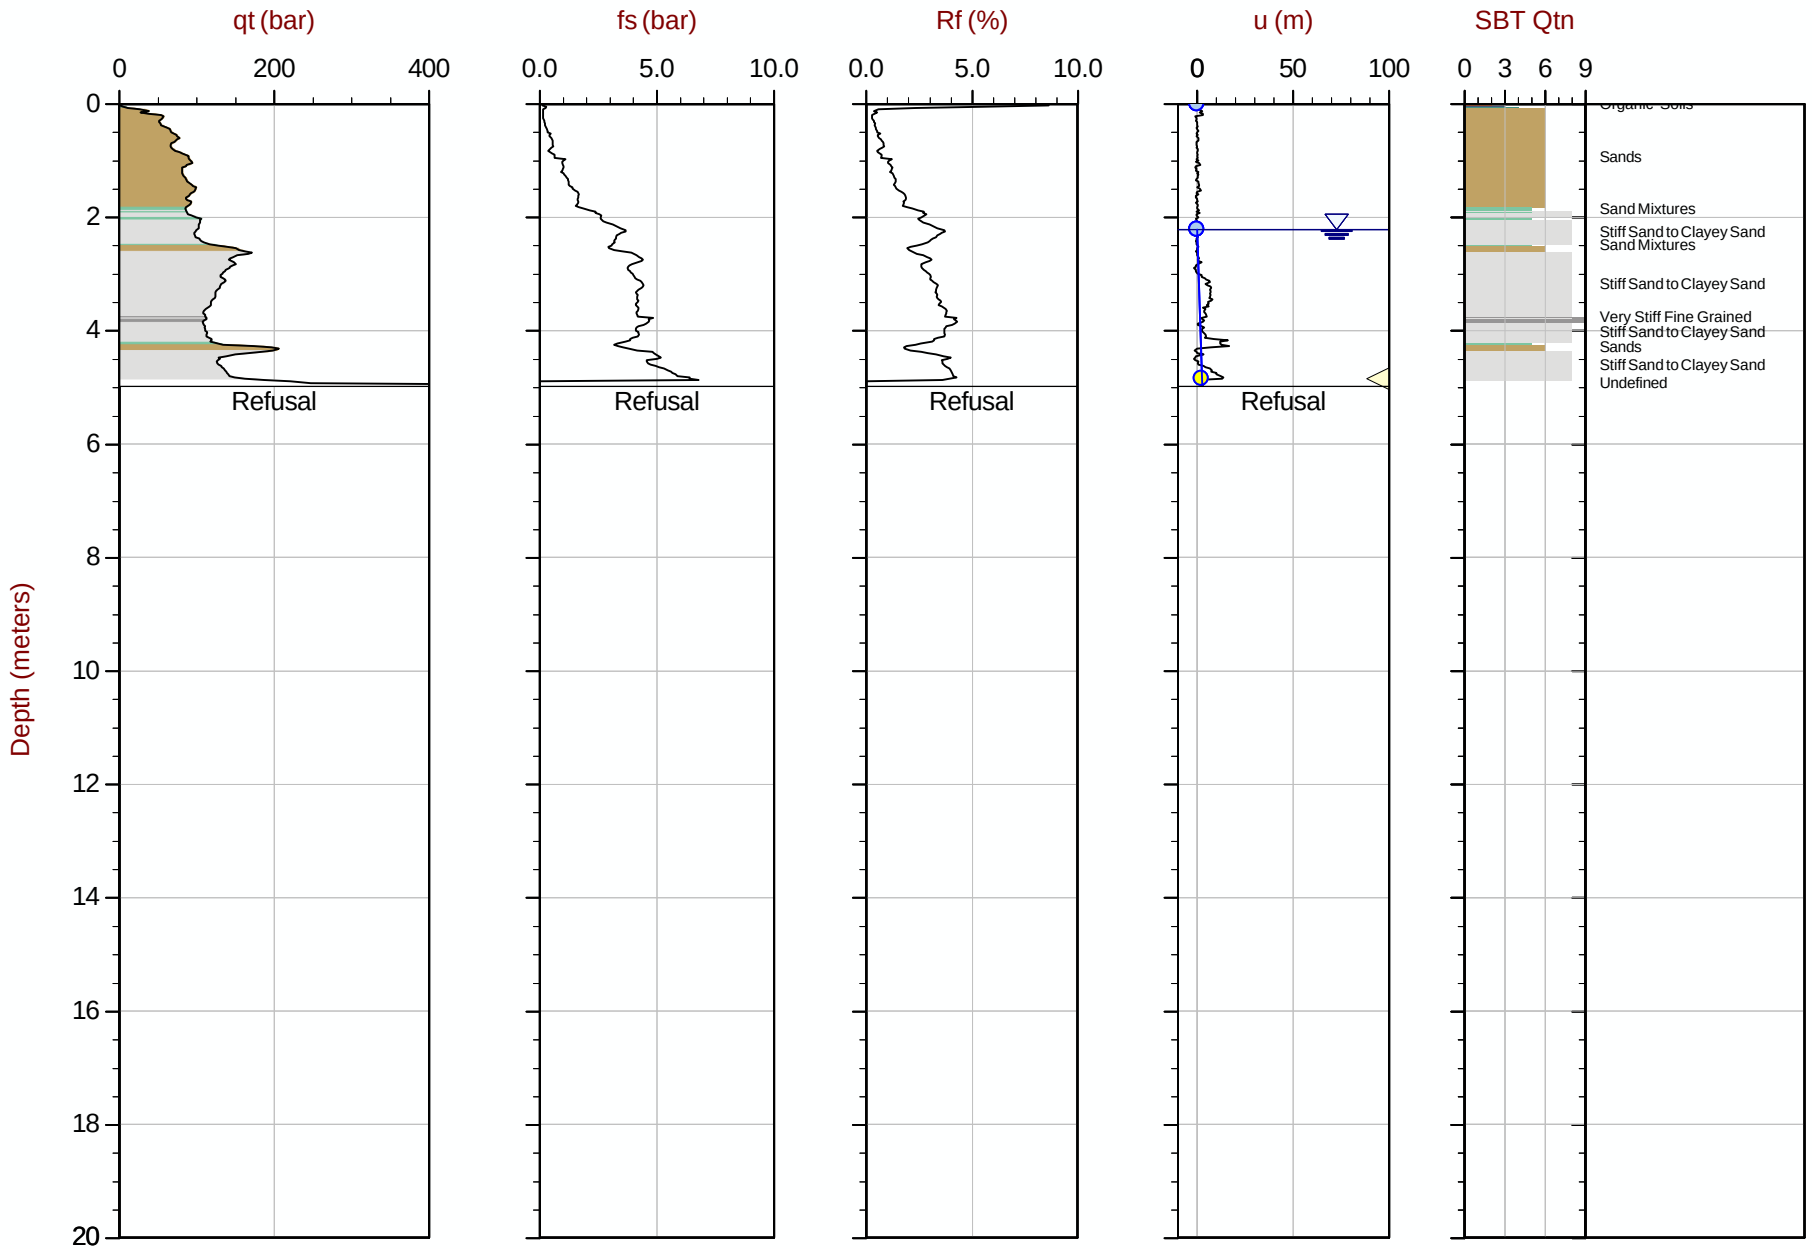

Max Depth: 4.975 m / 16.32 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT103.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612598m E: 414069m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 16:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT104
Cone: 651:T1500F15U35 Area= 15cm2

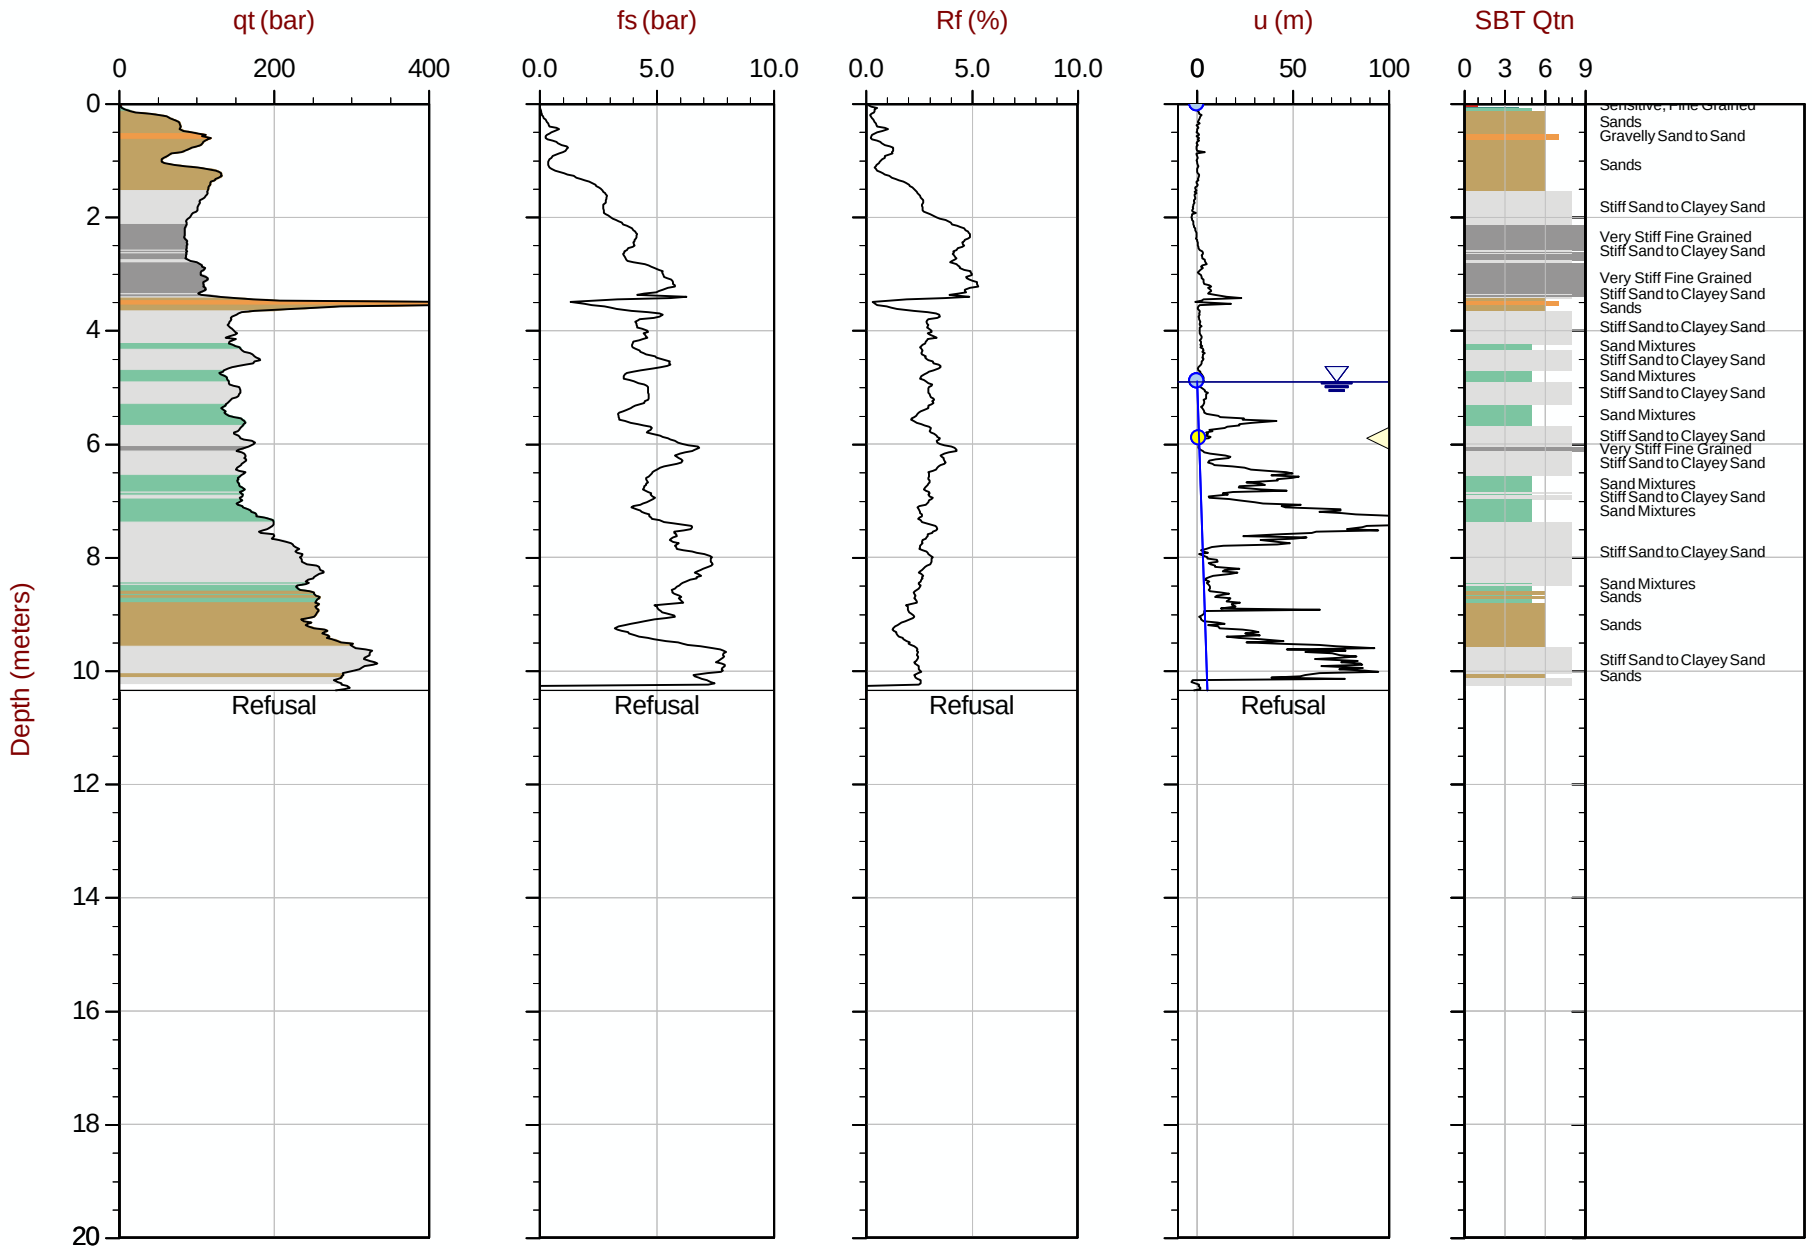

Max Depth: 10.350 m / 33.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT104.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 414171m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT105
Cone: 651:T1500F15U35 Area= 15cm2

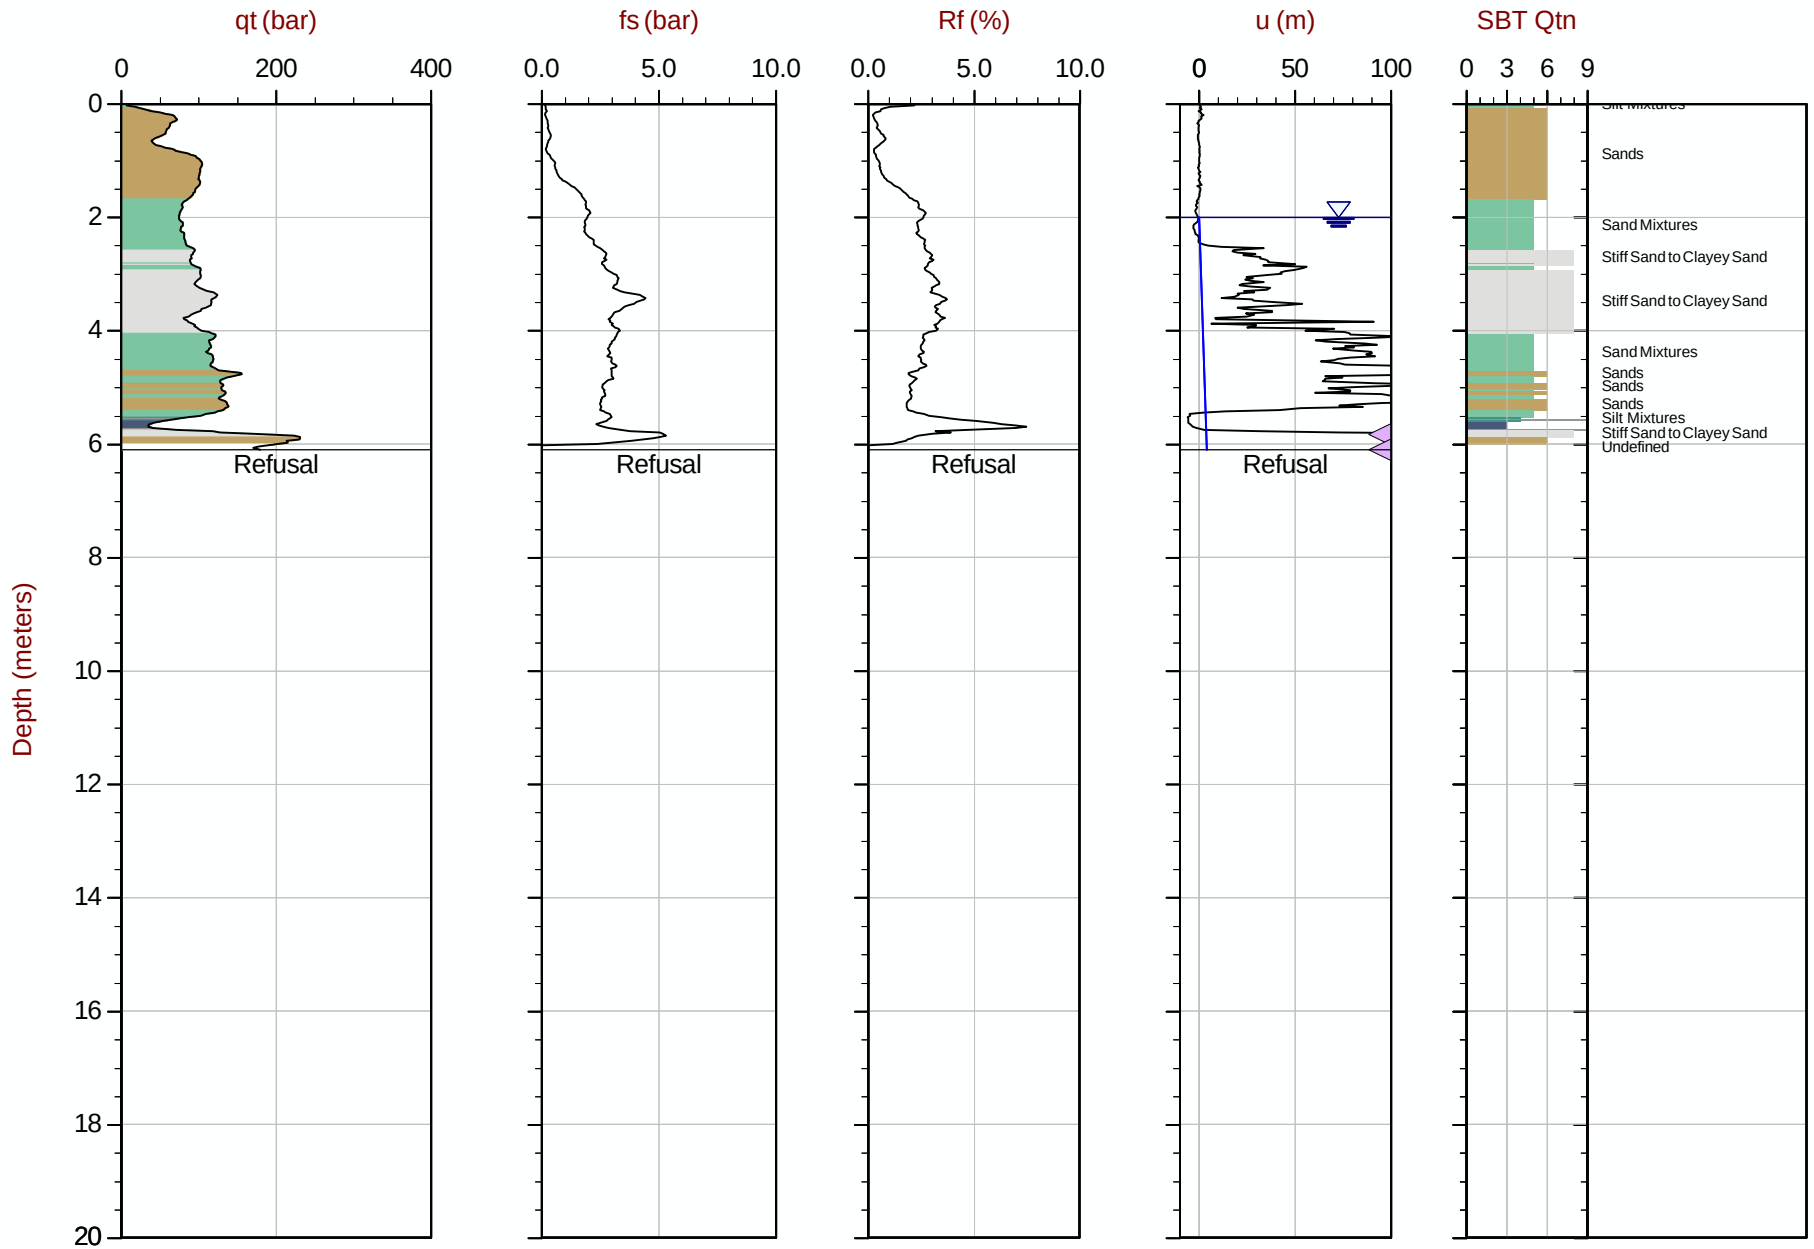

Max Depth: 6.100 m / 20.01 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT105.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612600m E: 414271m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 11:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT106
Cone: 651:T1500F15U35 Area= 15cm2

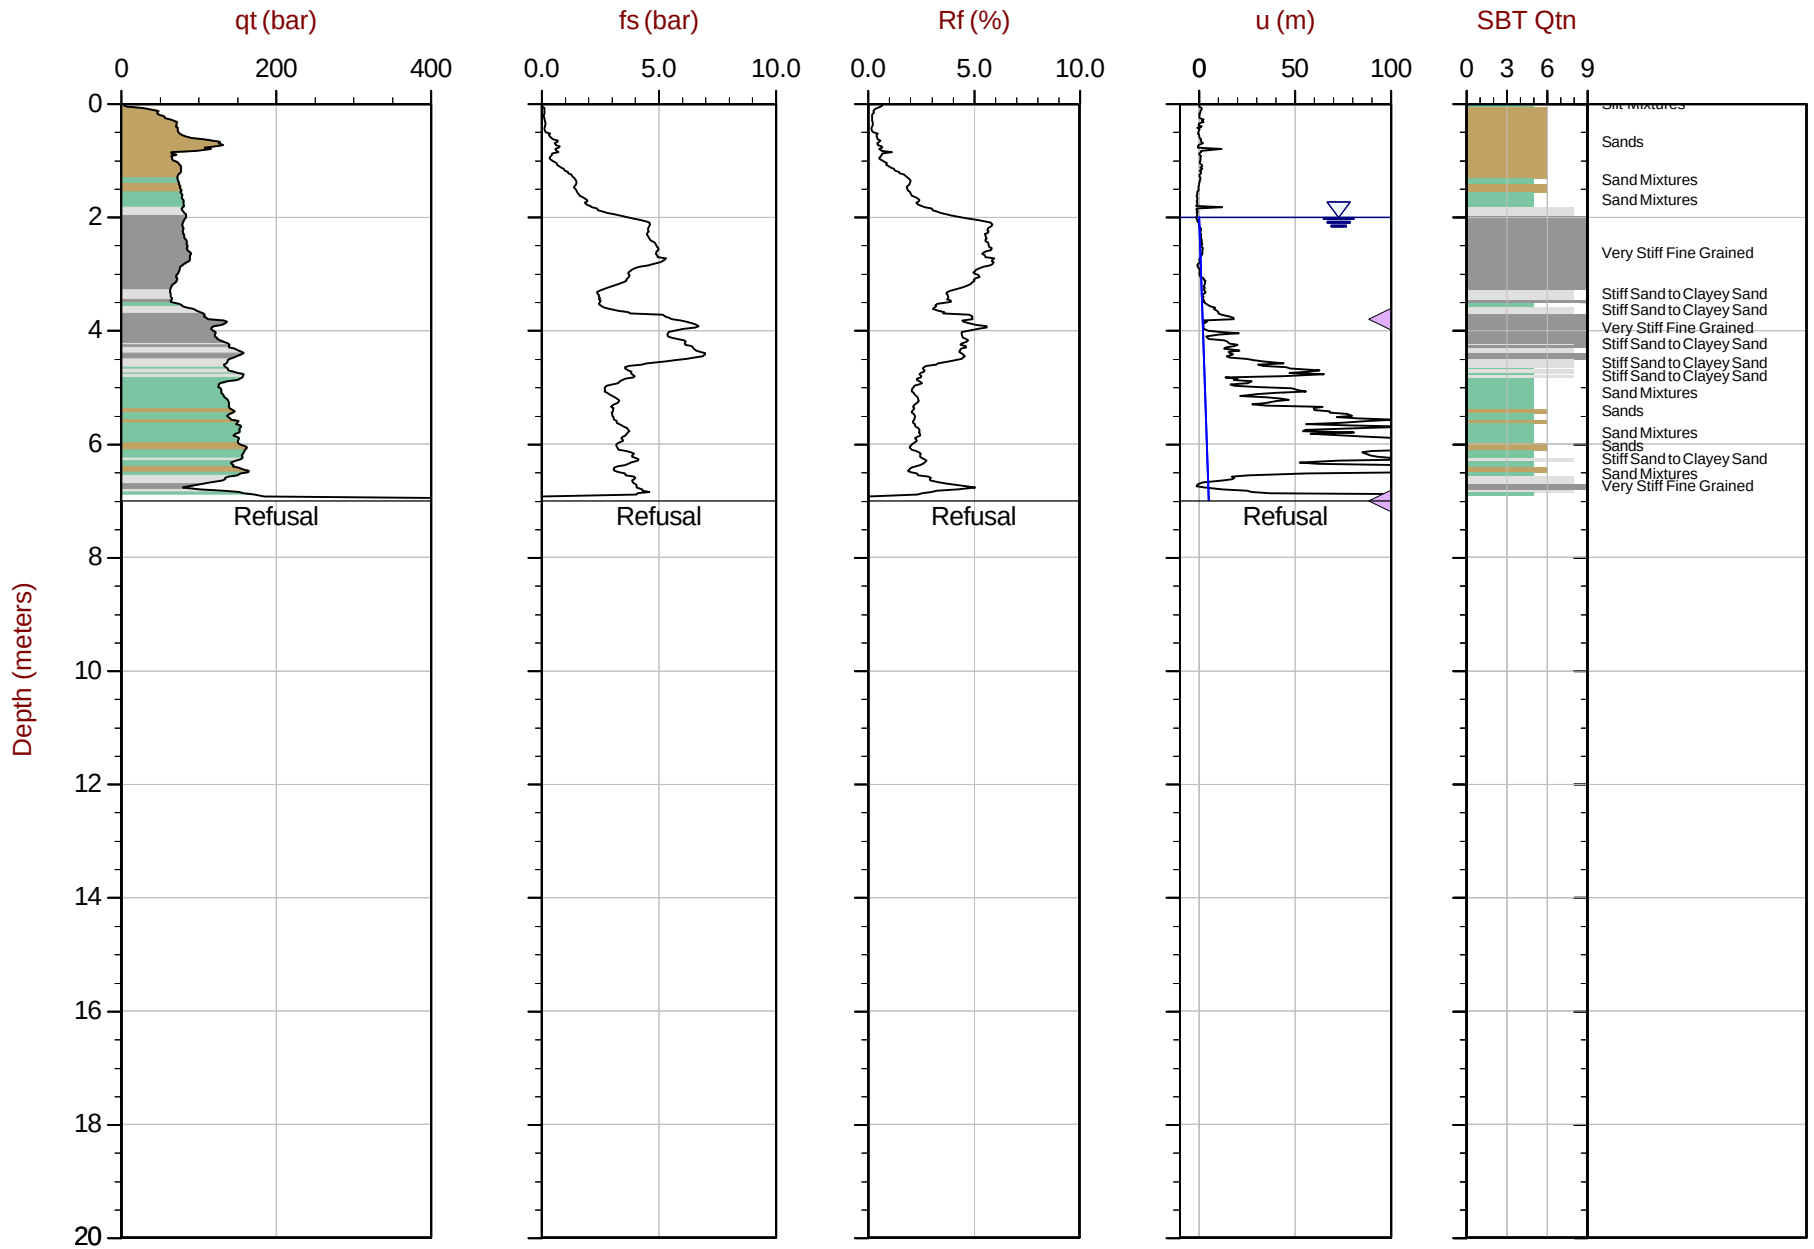

Max Depth: 7.000 m / 22.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT106.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612599m E: 414321m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 12:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT107
Cone: 651:T1500F15U35 Area= 15cm2

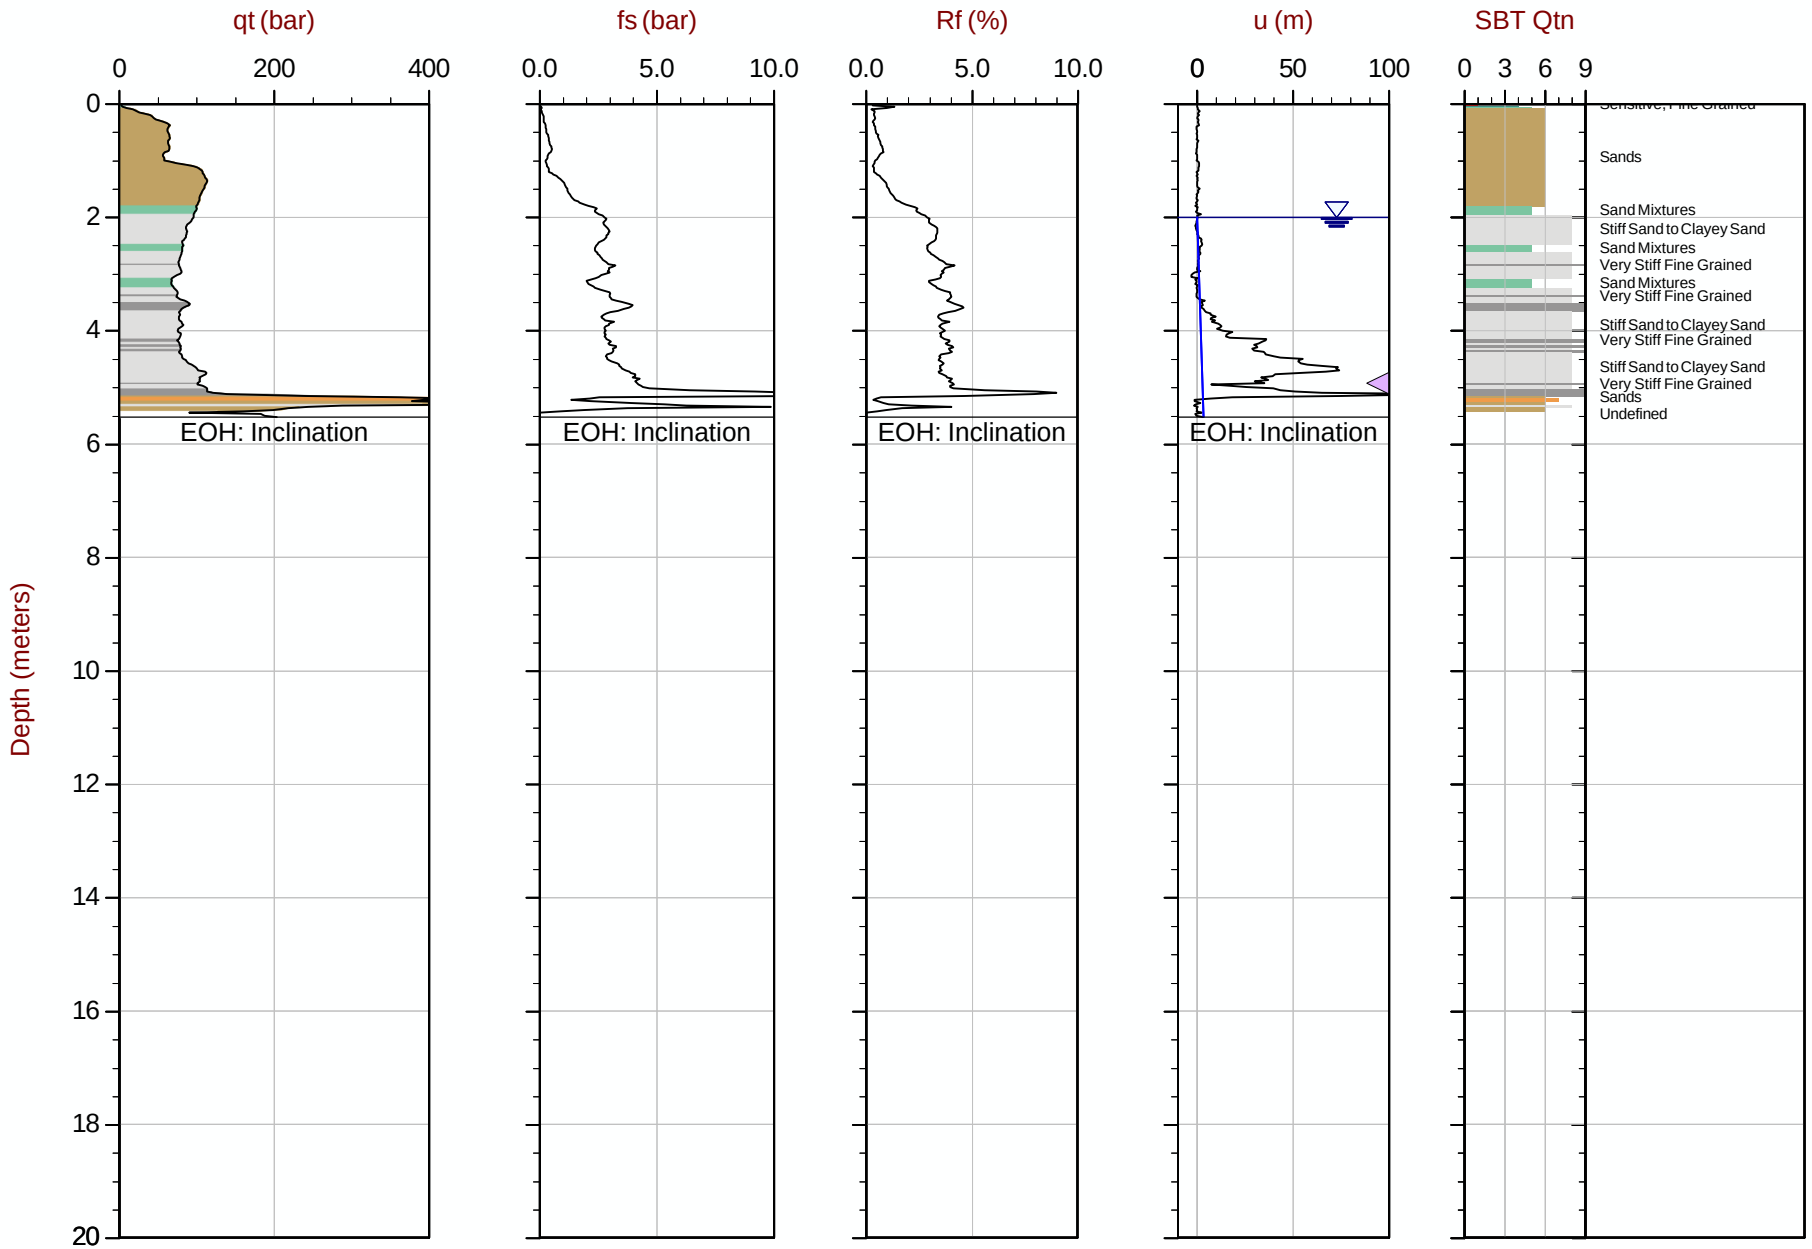

Max Depth: 5.525 m / 18.13 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT107.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612599m E: 414369m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 14:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT107A
Cone: 750:T1500F15U35 Area= 15cm2

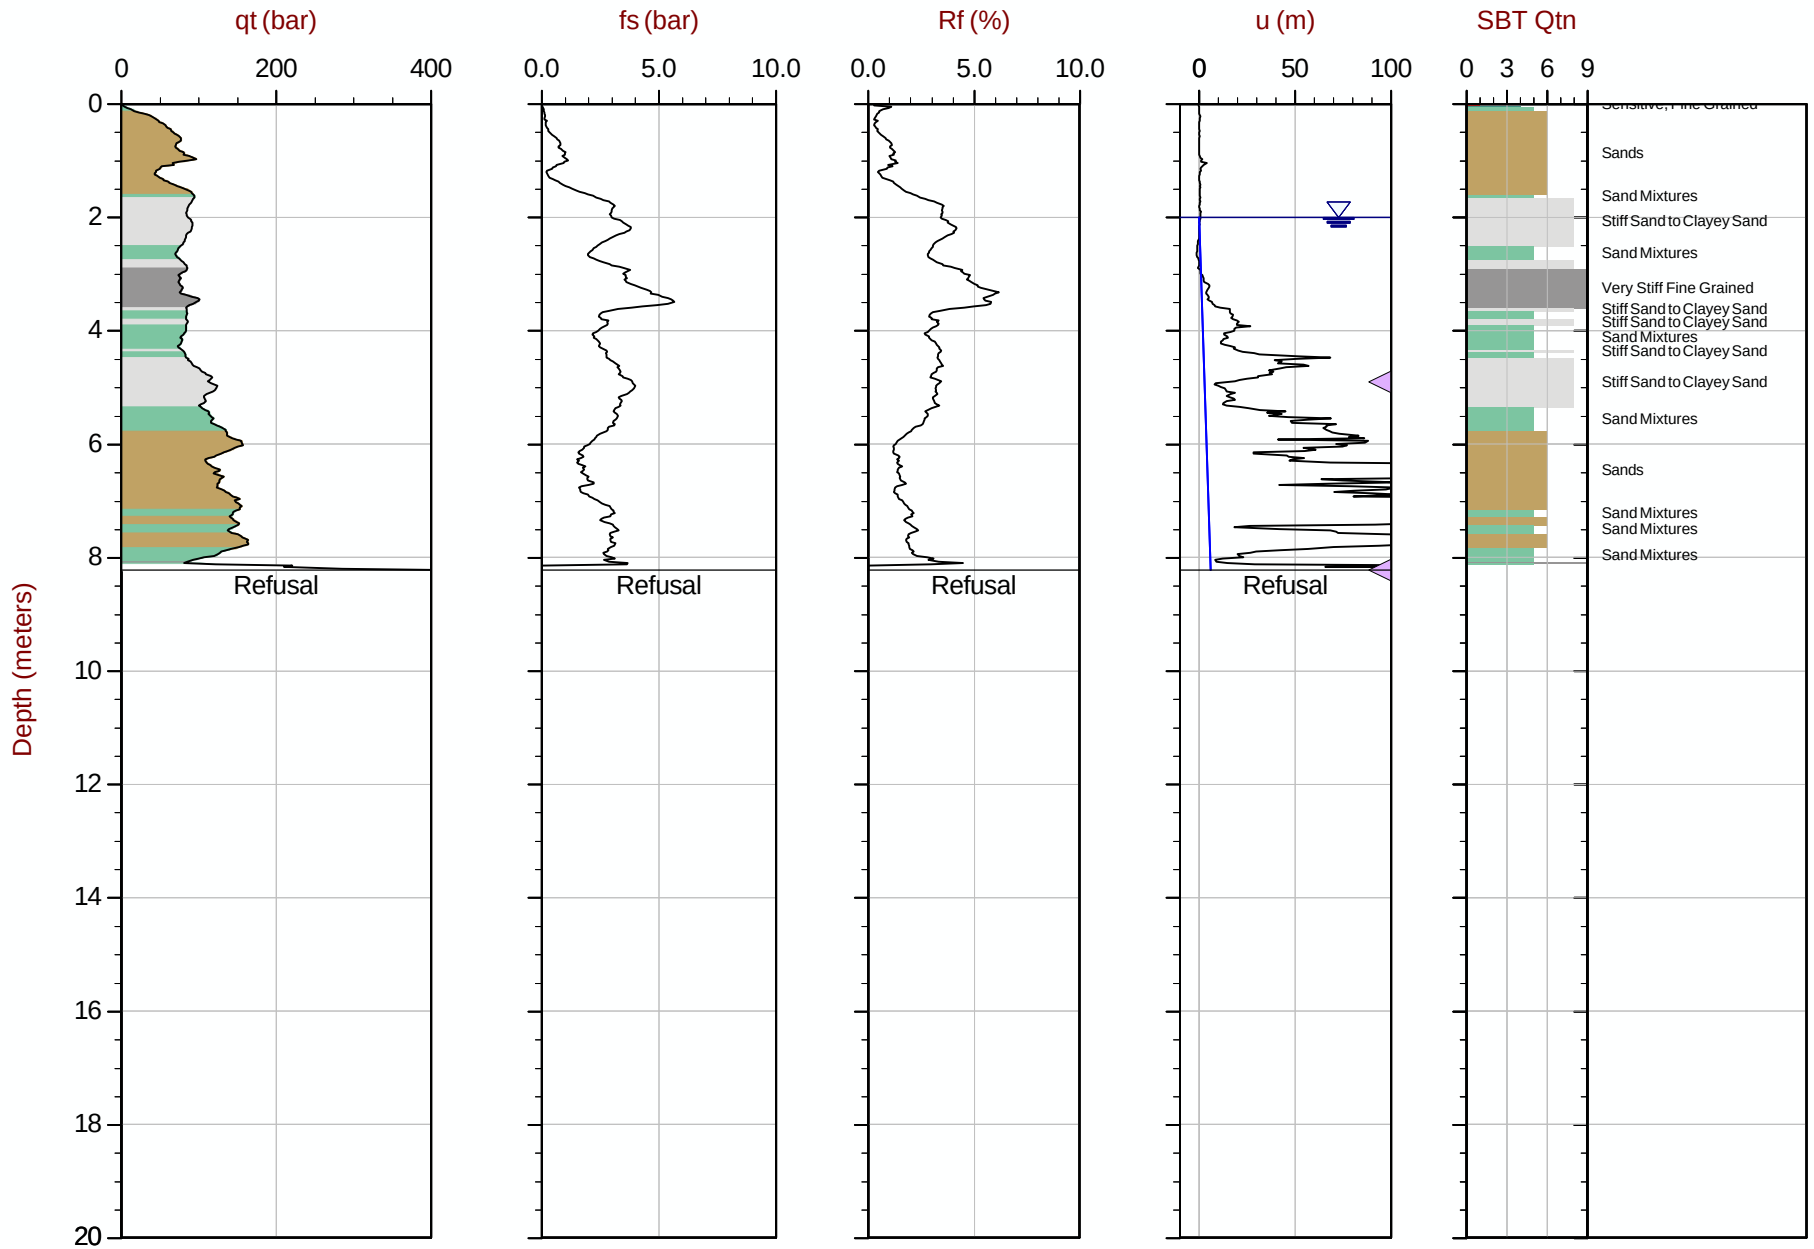

Max Depth: 8.225 m / 26.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT107A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612616m E: 414367m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 16:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT108
Cone: 750:T1500F15U35 Area= 15cm2

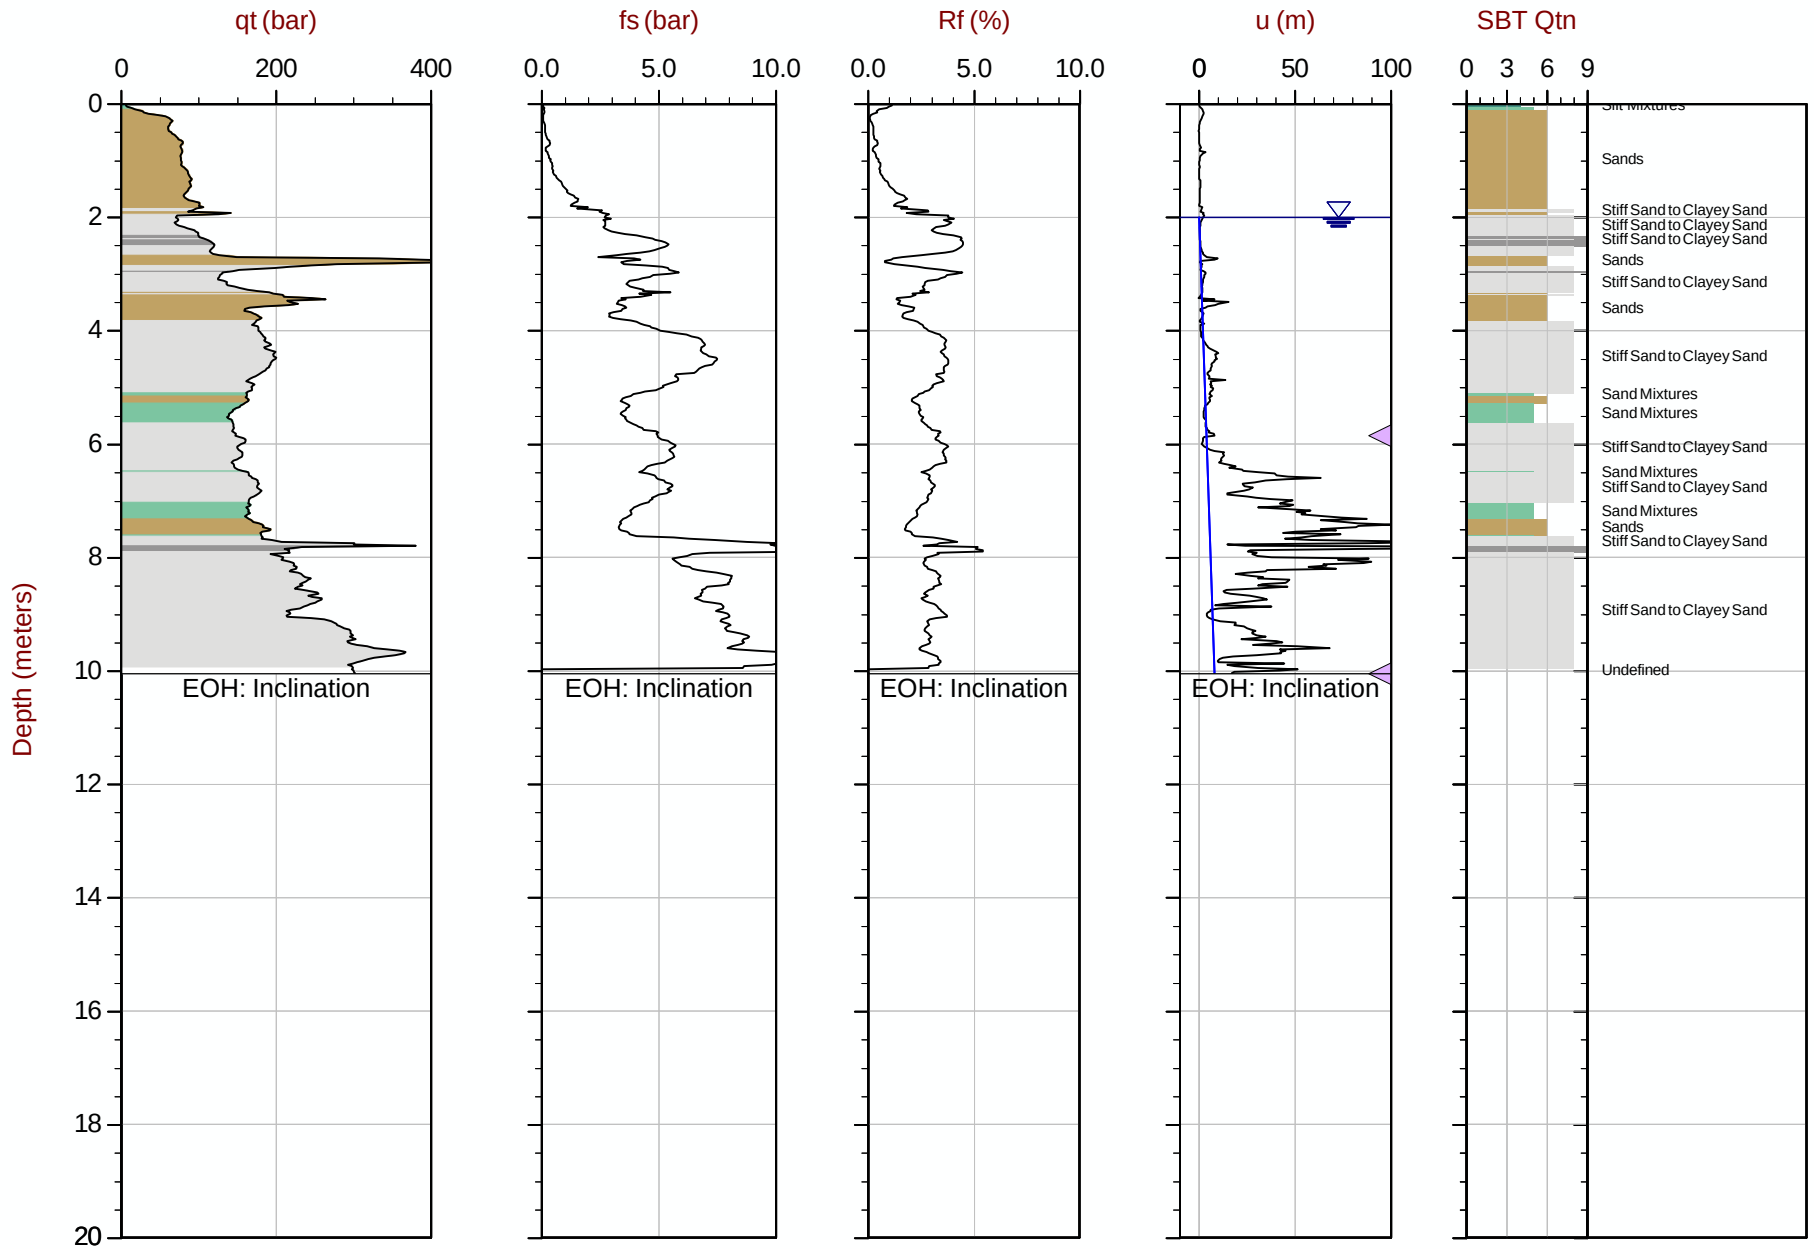

Max Depth: 10.050 m / 32.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT108.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 414520m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 08:46
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT109
Cone: 750:T1500F15U35 Area= 15cm2

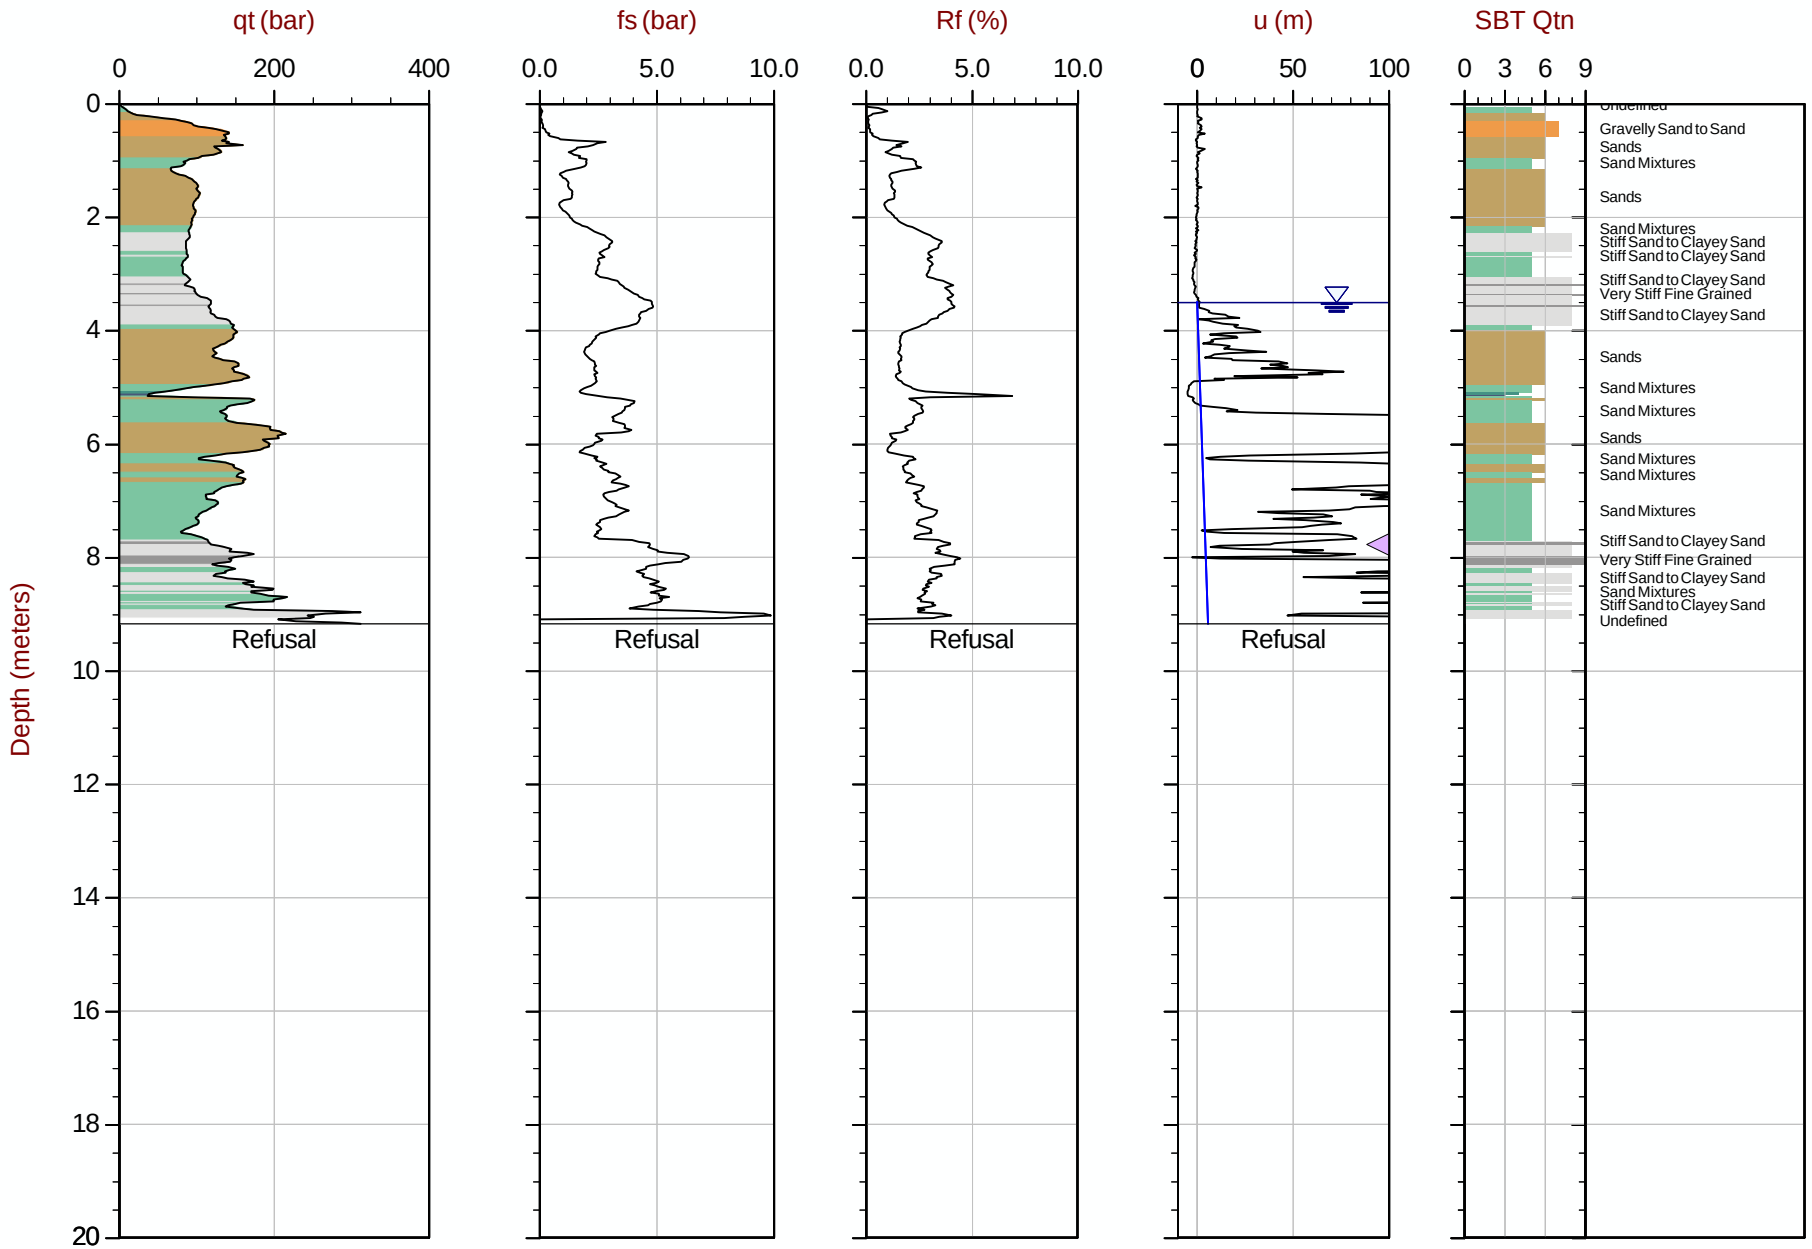

Max Depth: 9.175 m / 30.10 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT109.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 414569m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 16:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110
Cone: 750:T1500F15U35 Area= 15cm2

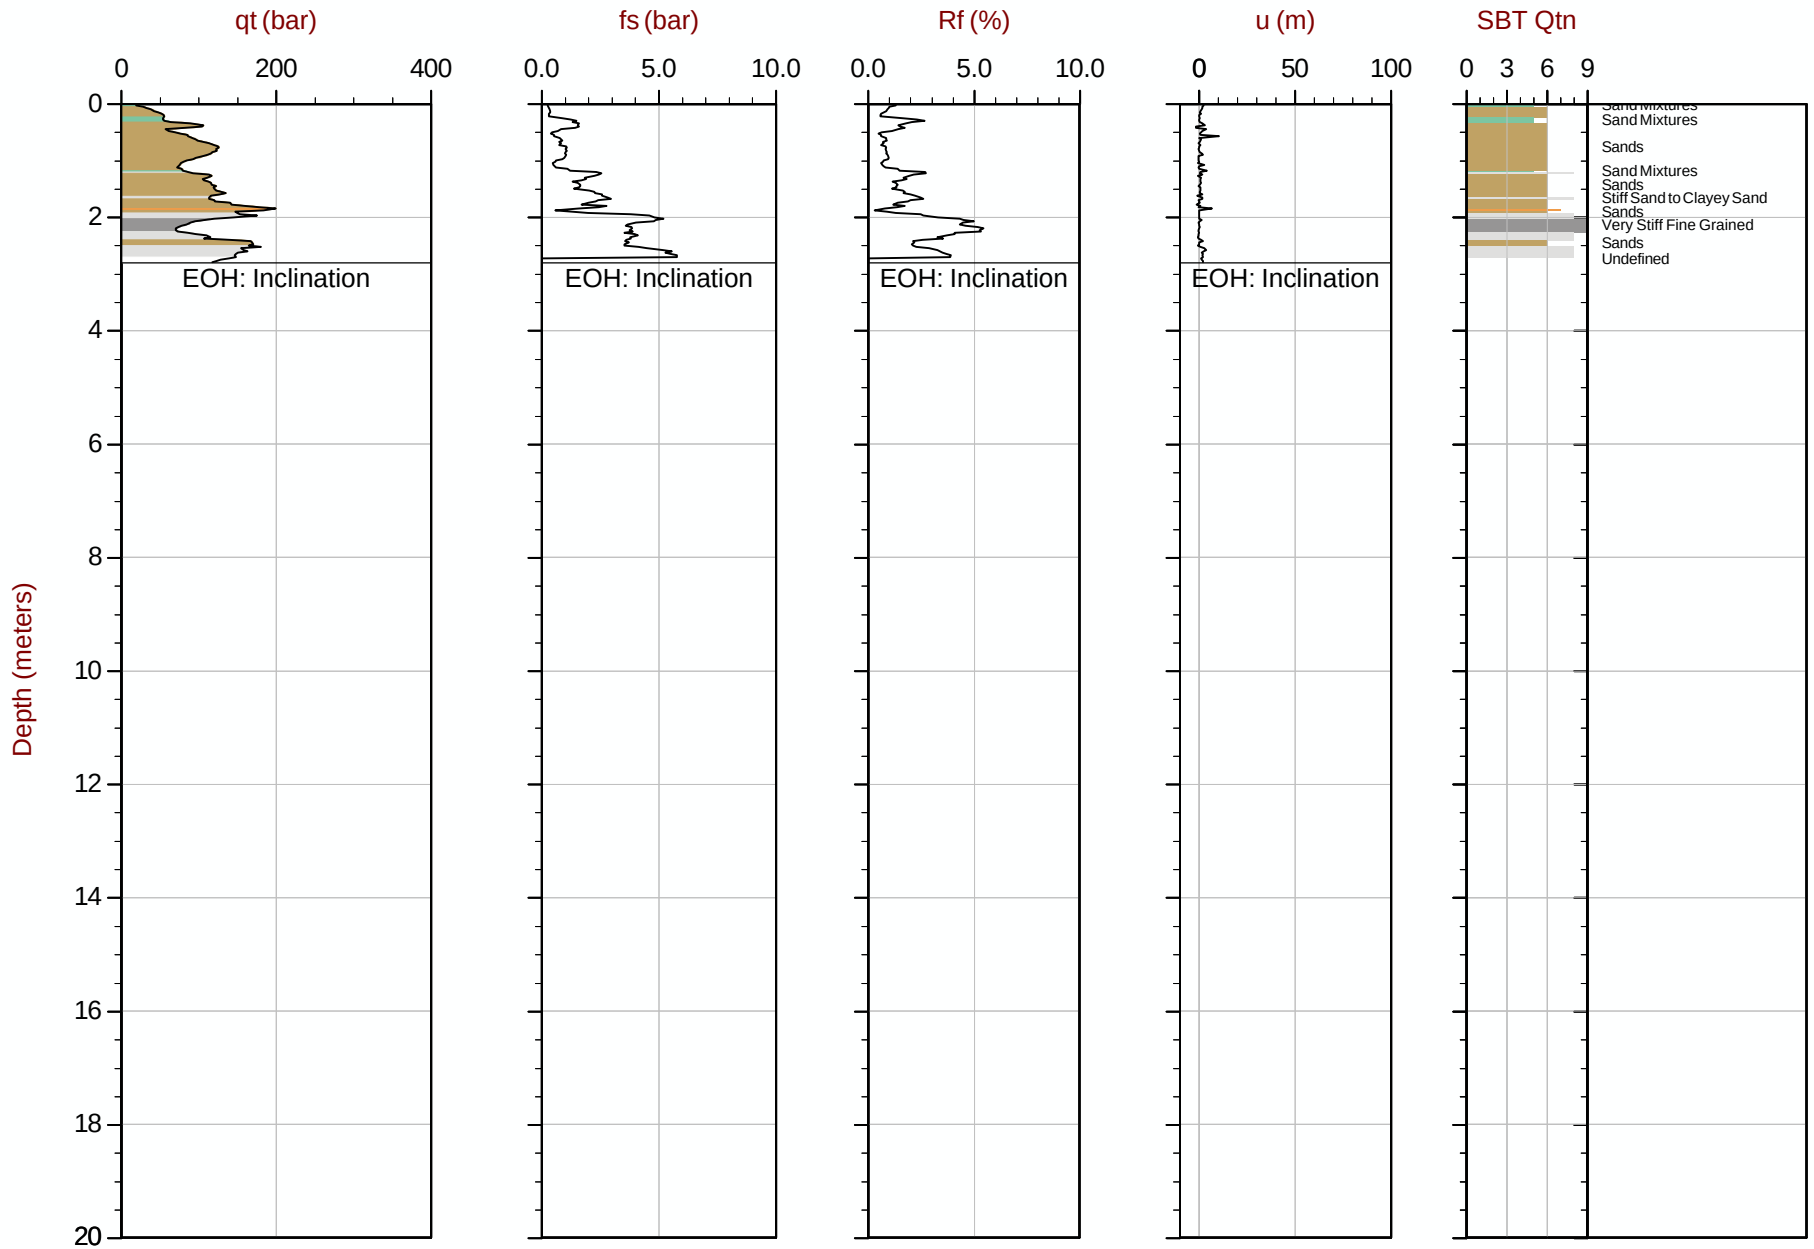

Max Depth: 2.800 m / 9.19 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT110.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612594m E: 414669m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 16:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110A
Cone: 750:T1500F15U35 Area= 15cm2

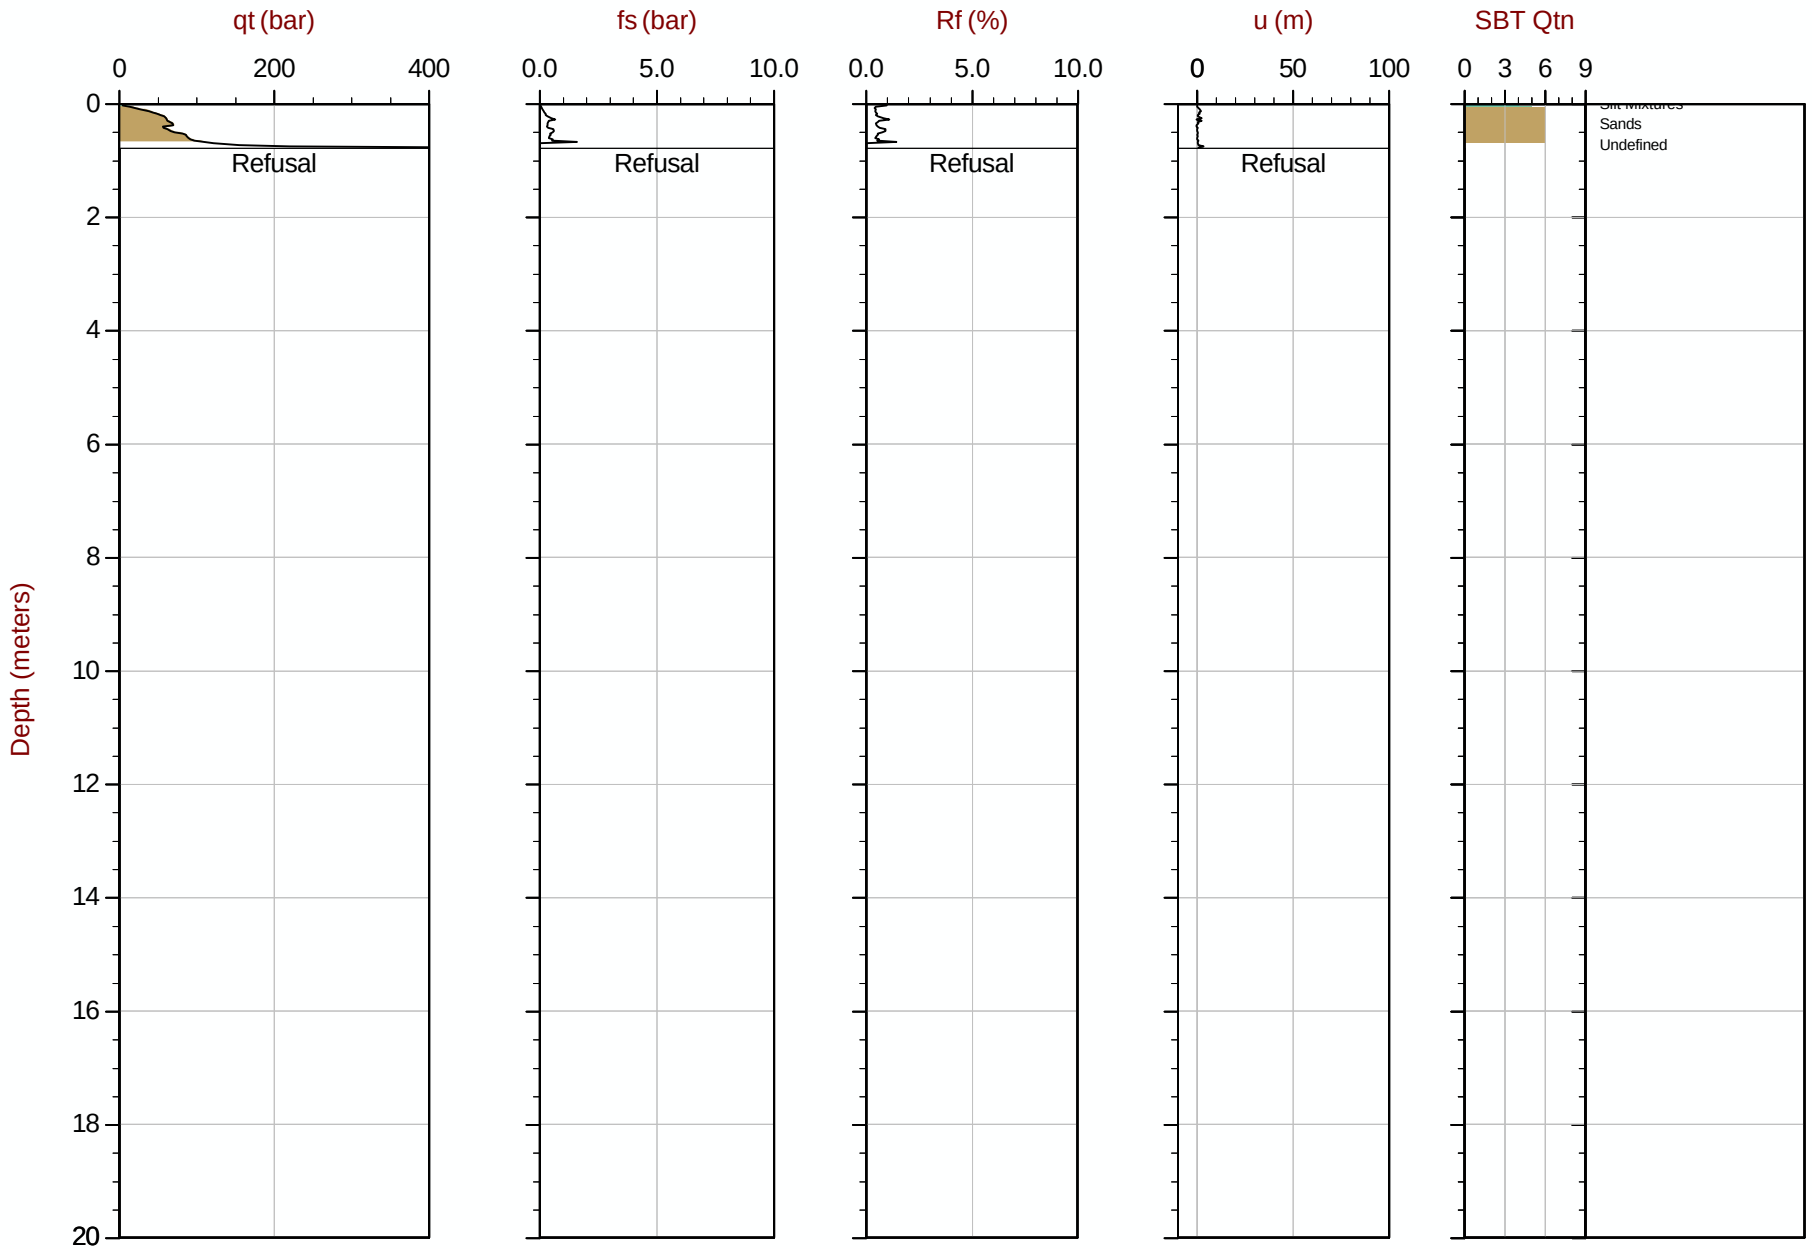

Max Depth: 0.775 m / 2.54 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT110A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612594m E: 414669m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 17:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110B
Cone: 750:T1500F15U35 Area= 15cm2

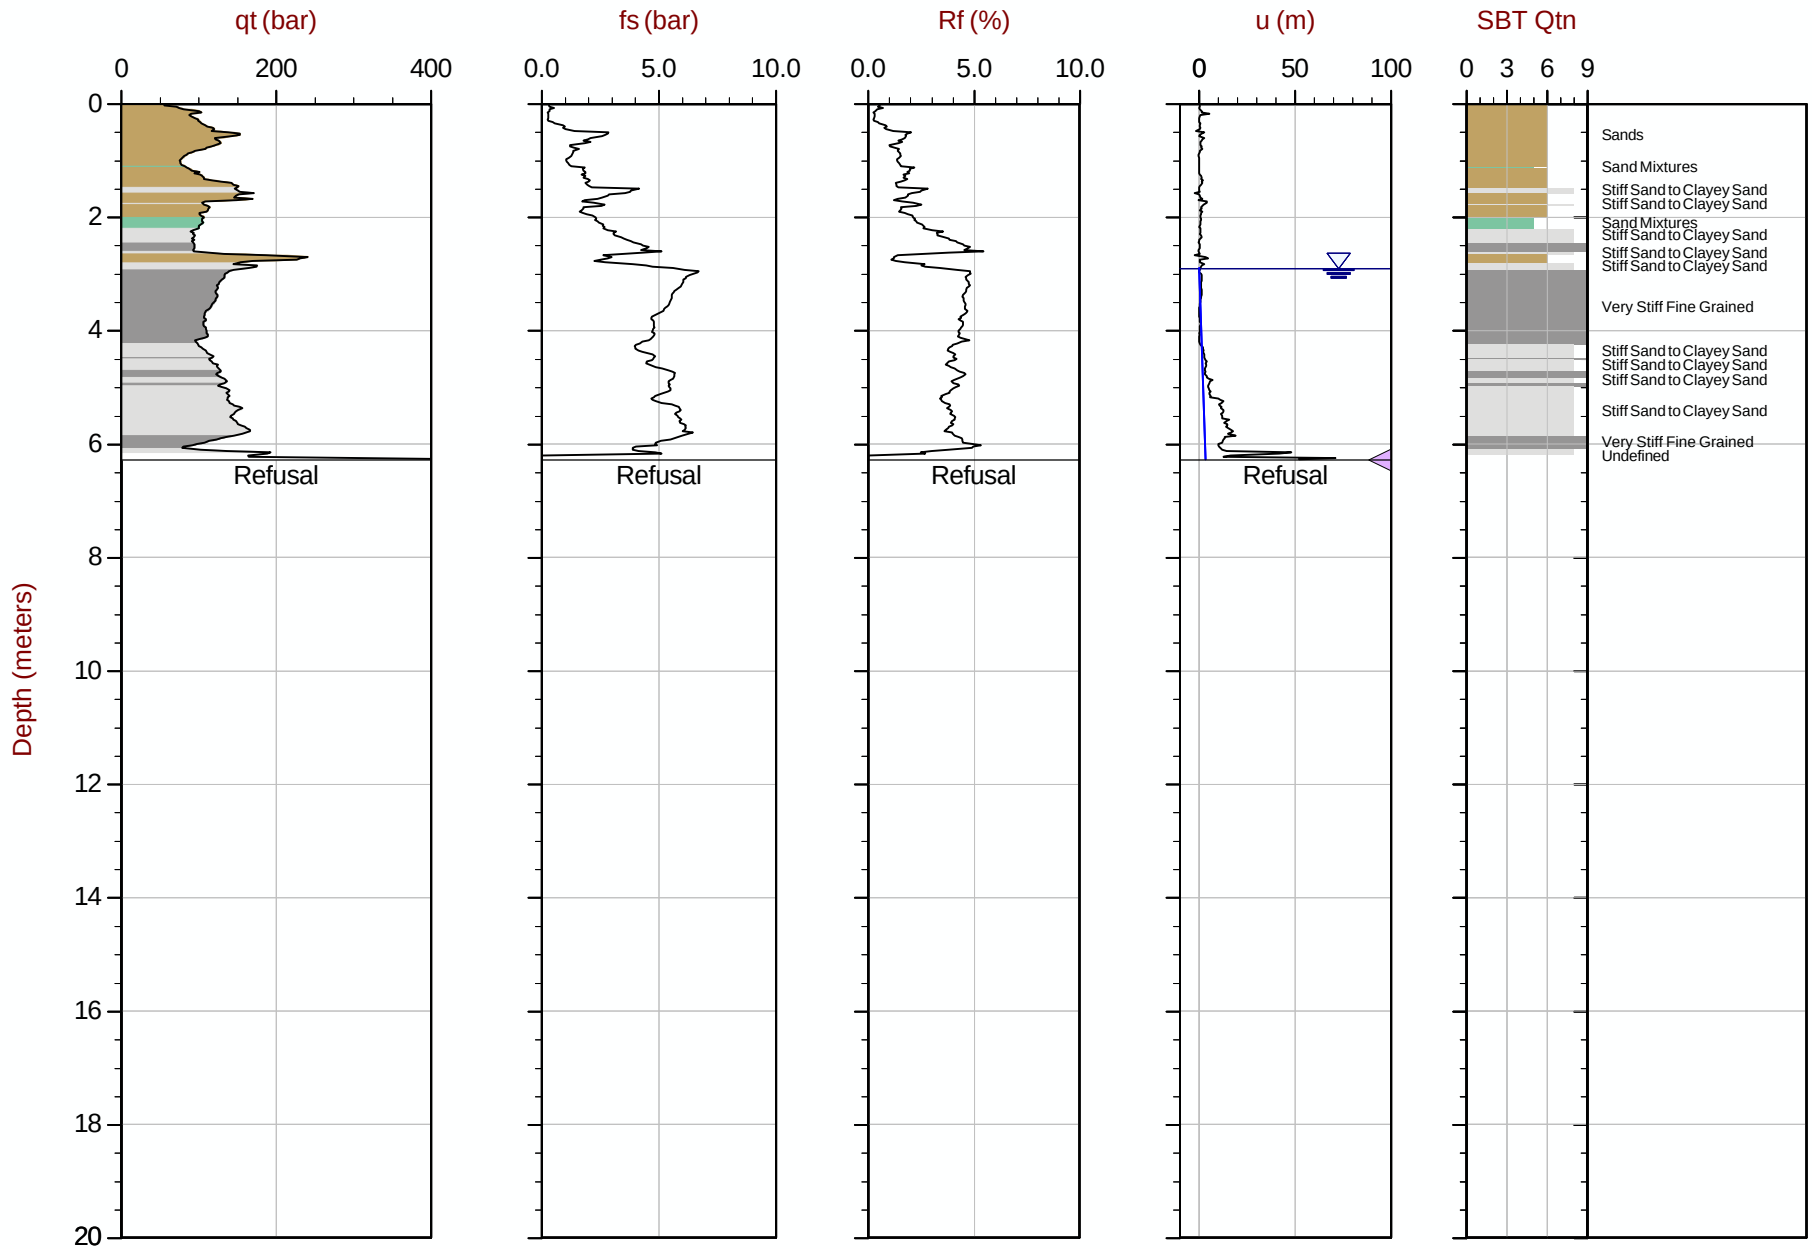

Max Depth: 6.275 m / 20.59 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT110B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612594m E: 414669m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 14:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT111
Cone: 750:T1500F15U35 Area= 15cm2

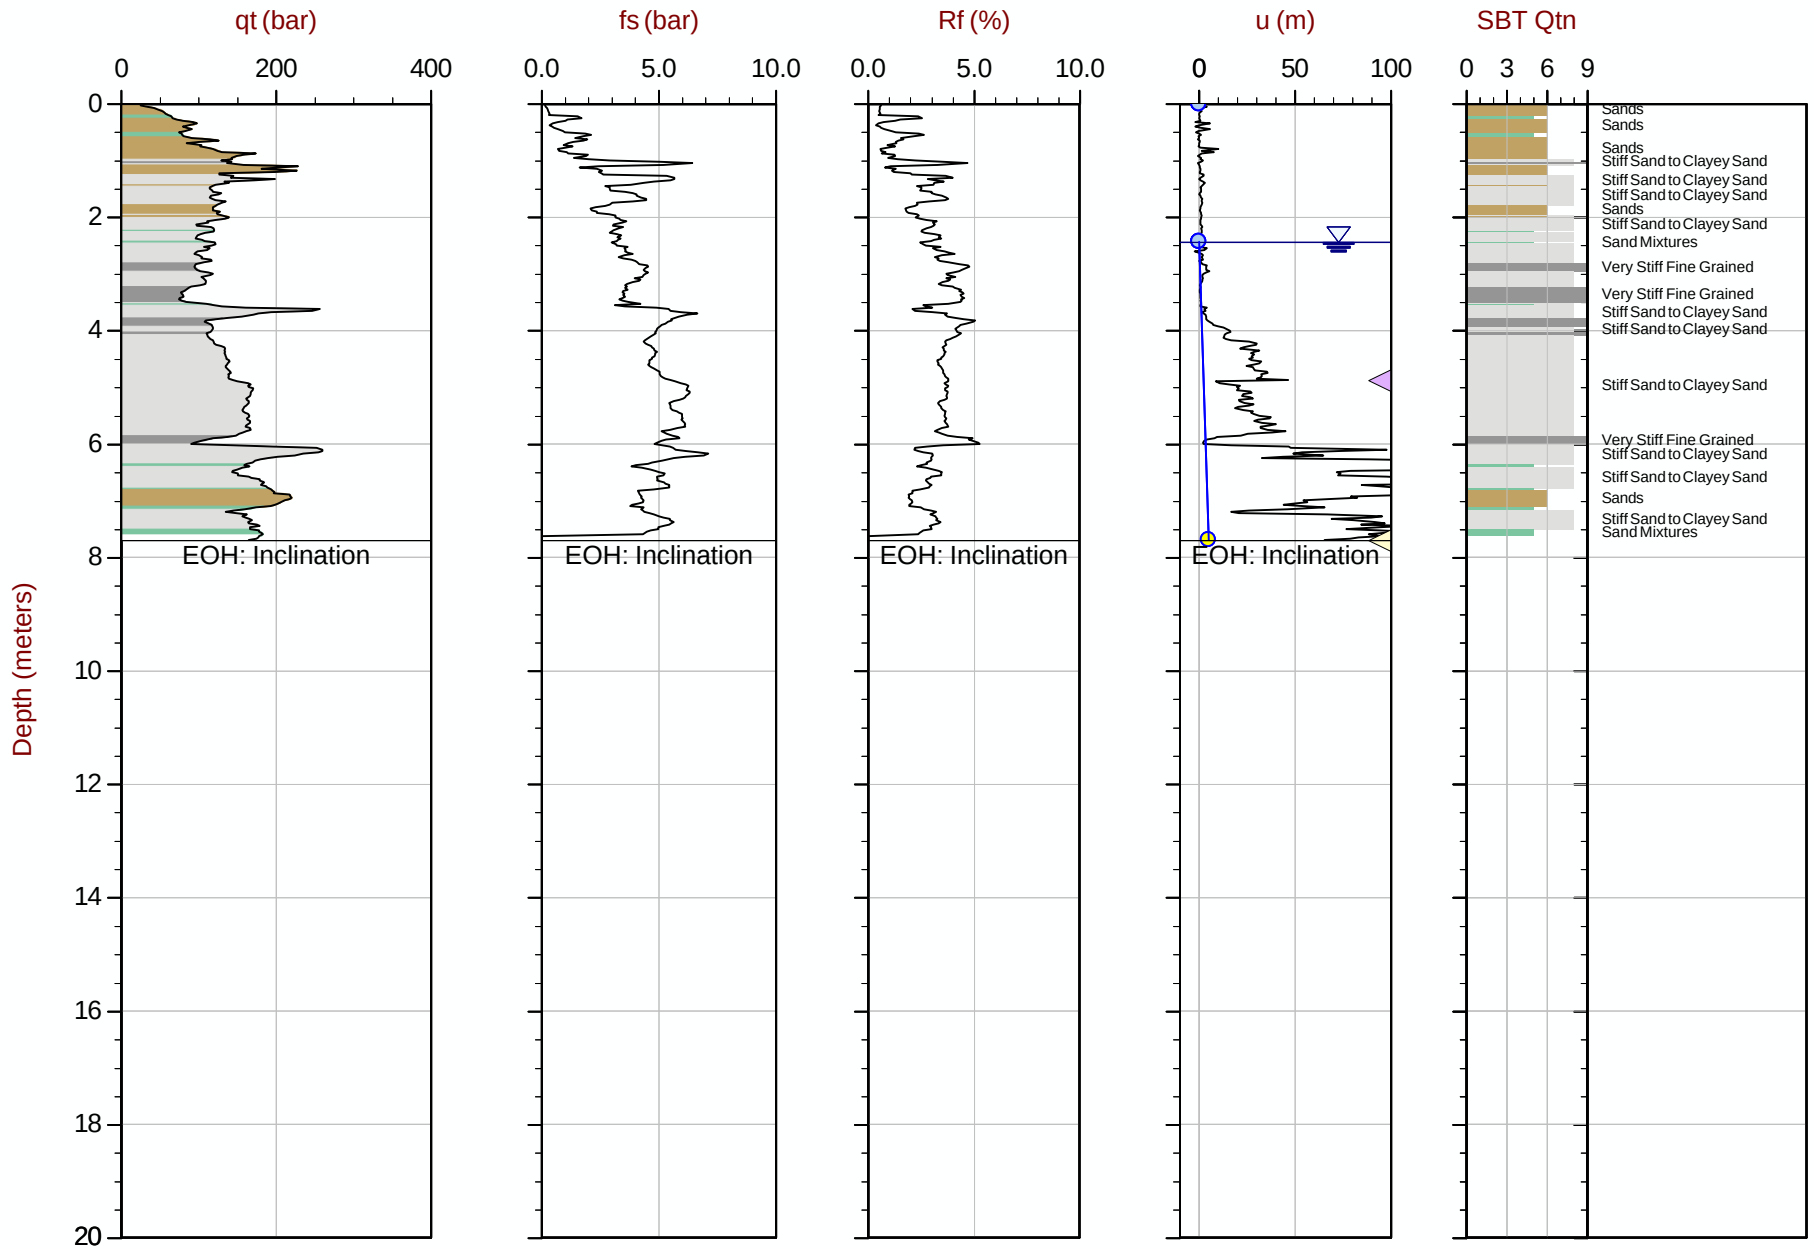

Max Depth: 7.700 m / 25.26 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT111.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612593m E: 414769m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 11:55
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT112
Cone: 750:T1500F15U35 Area= 15cm2

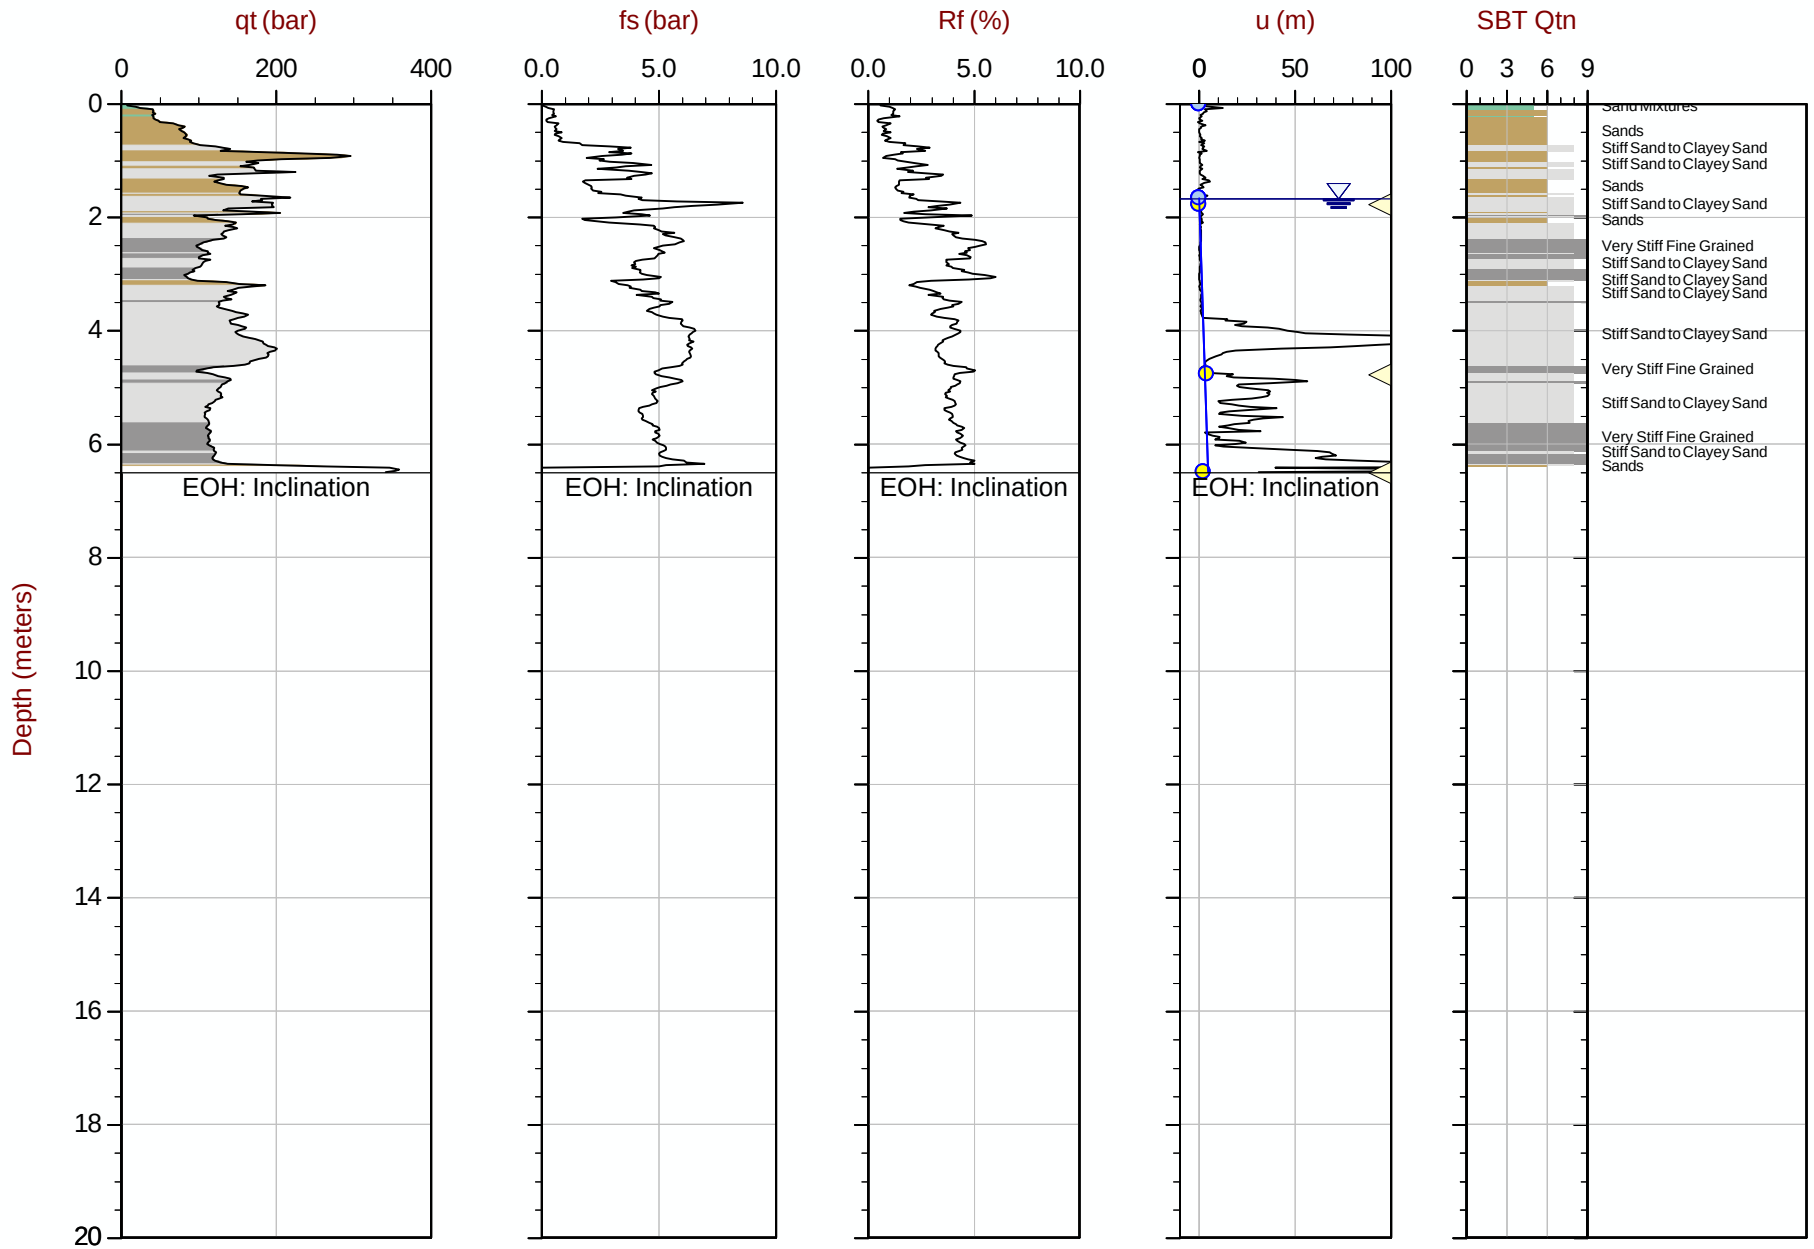

Max Depth: 6.500 m / 21.33 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT112.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612592m E: 414871m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 08:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT113
Cone: 750:T1500F15U35 Area= 15cm2

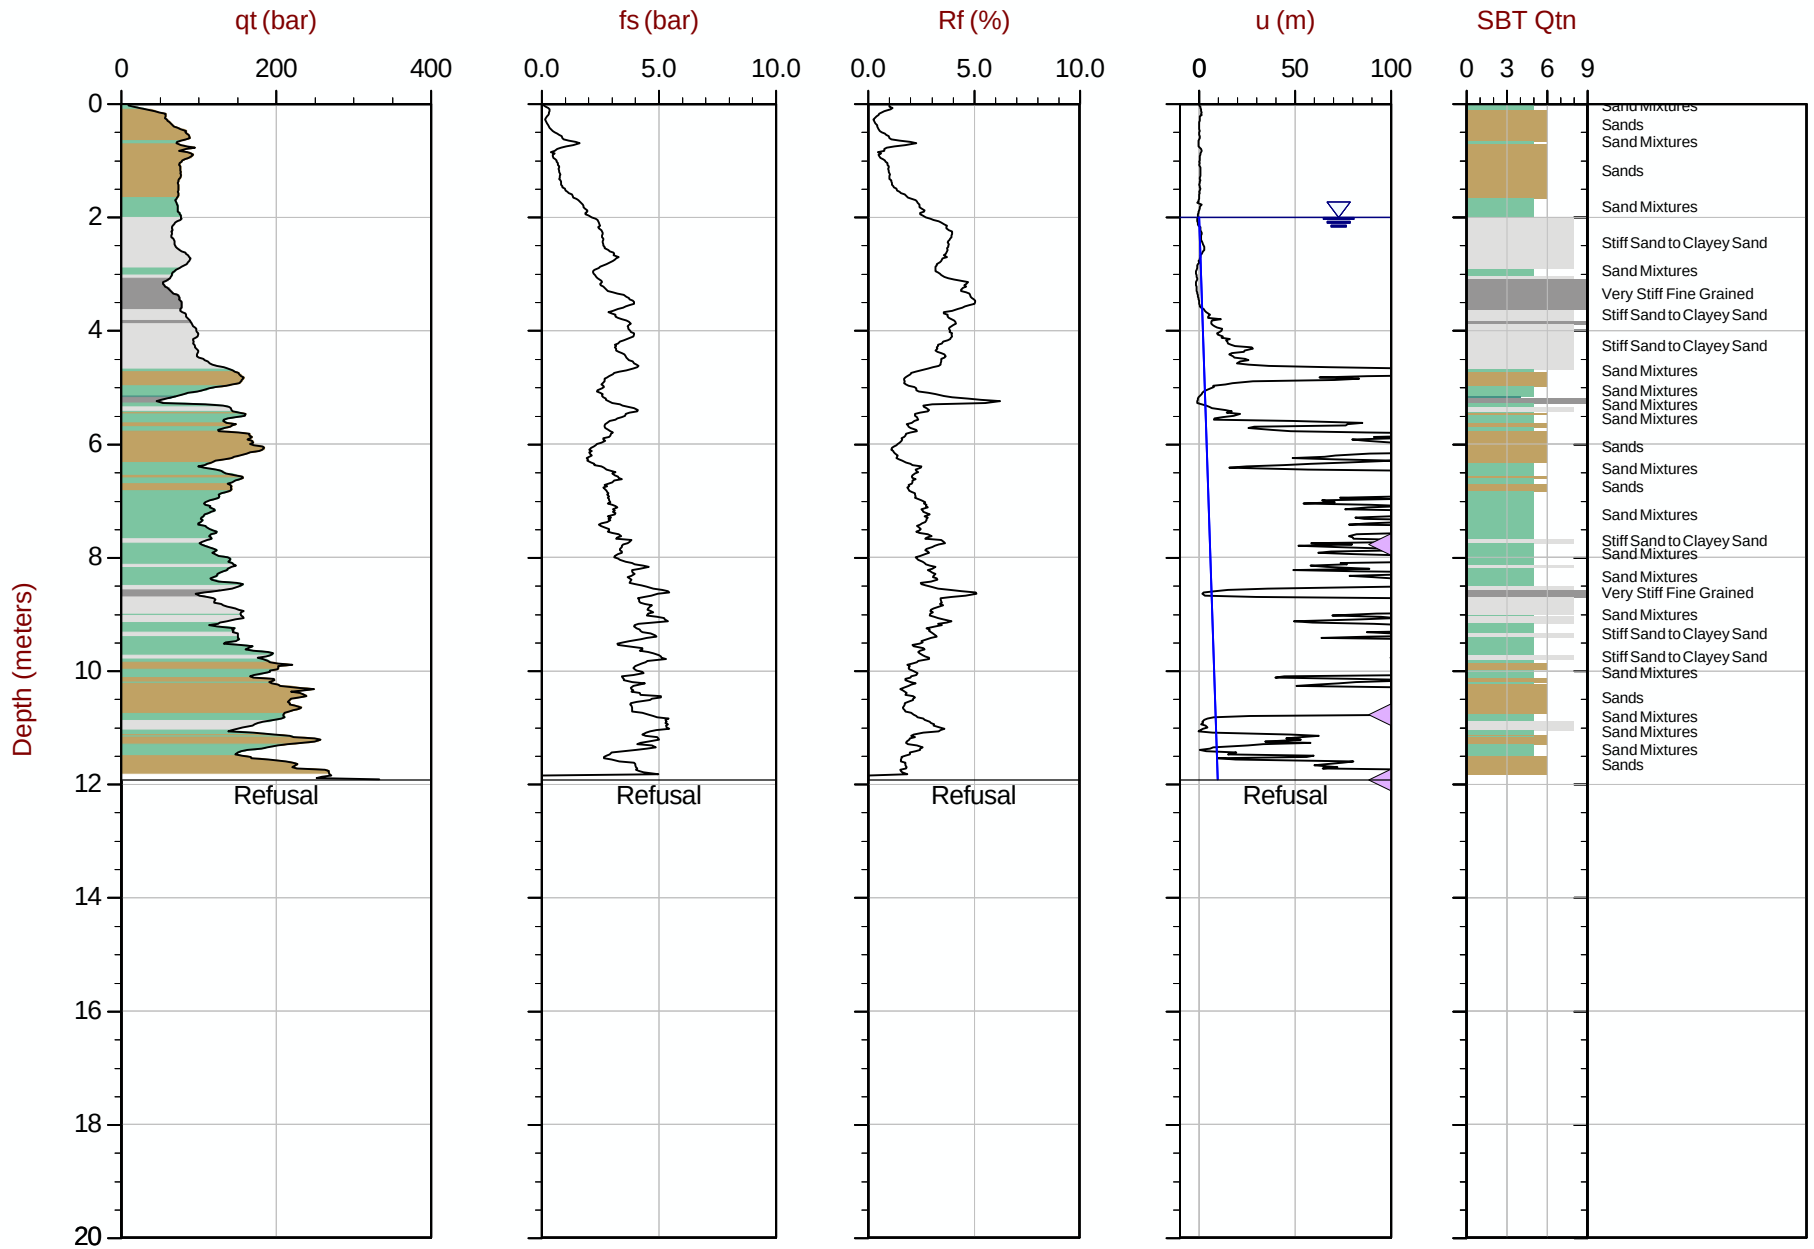

Max Depth: 11.925 m / 39.12 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT113.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612590m E: 414971m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 10:49
Site: Brooks, Alberta

Sounding: RCPT22-22CPT114
Cone: 750:T1500F15U35 Area= 15cm2

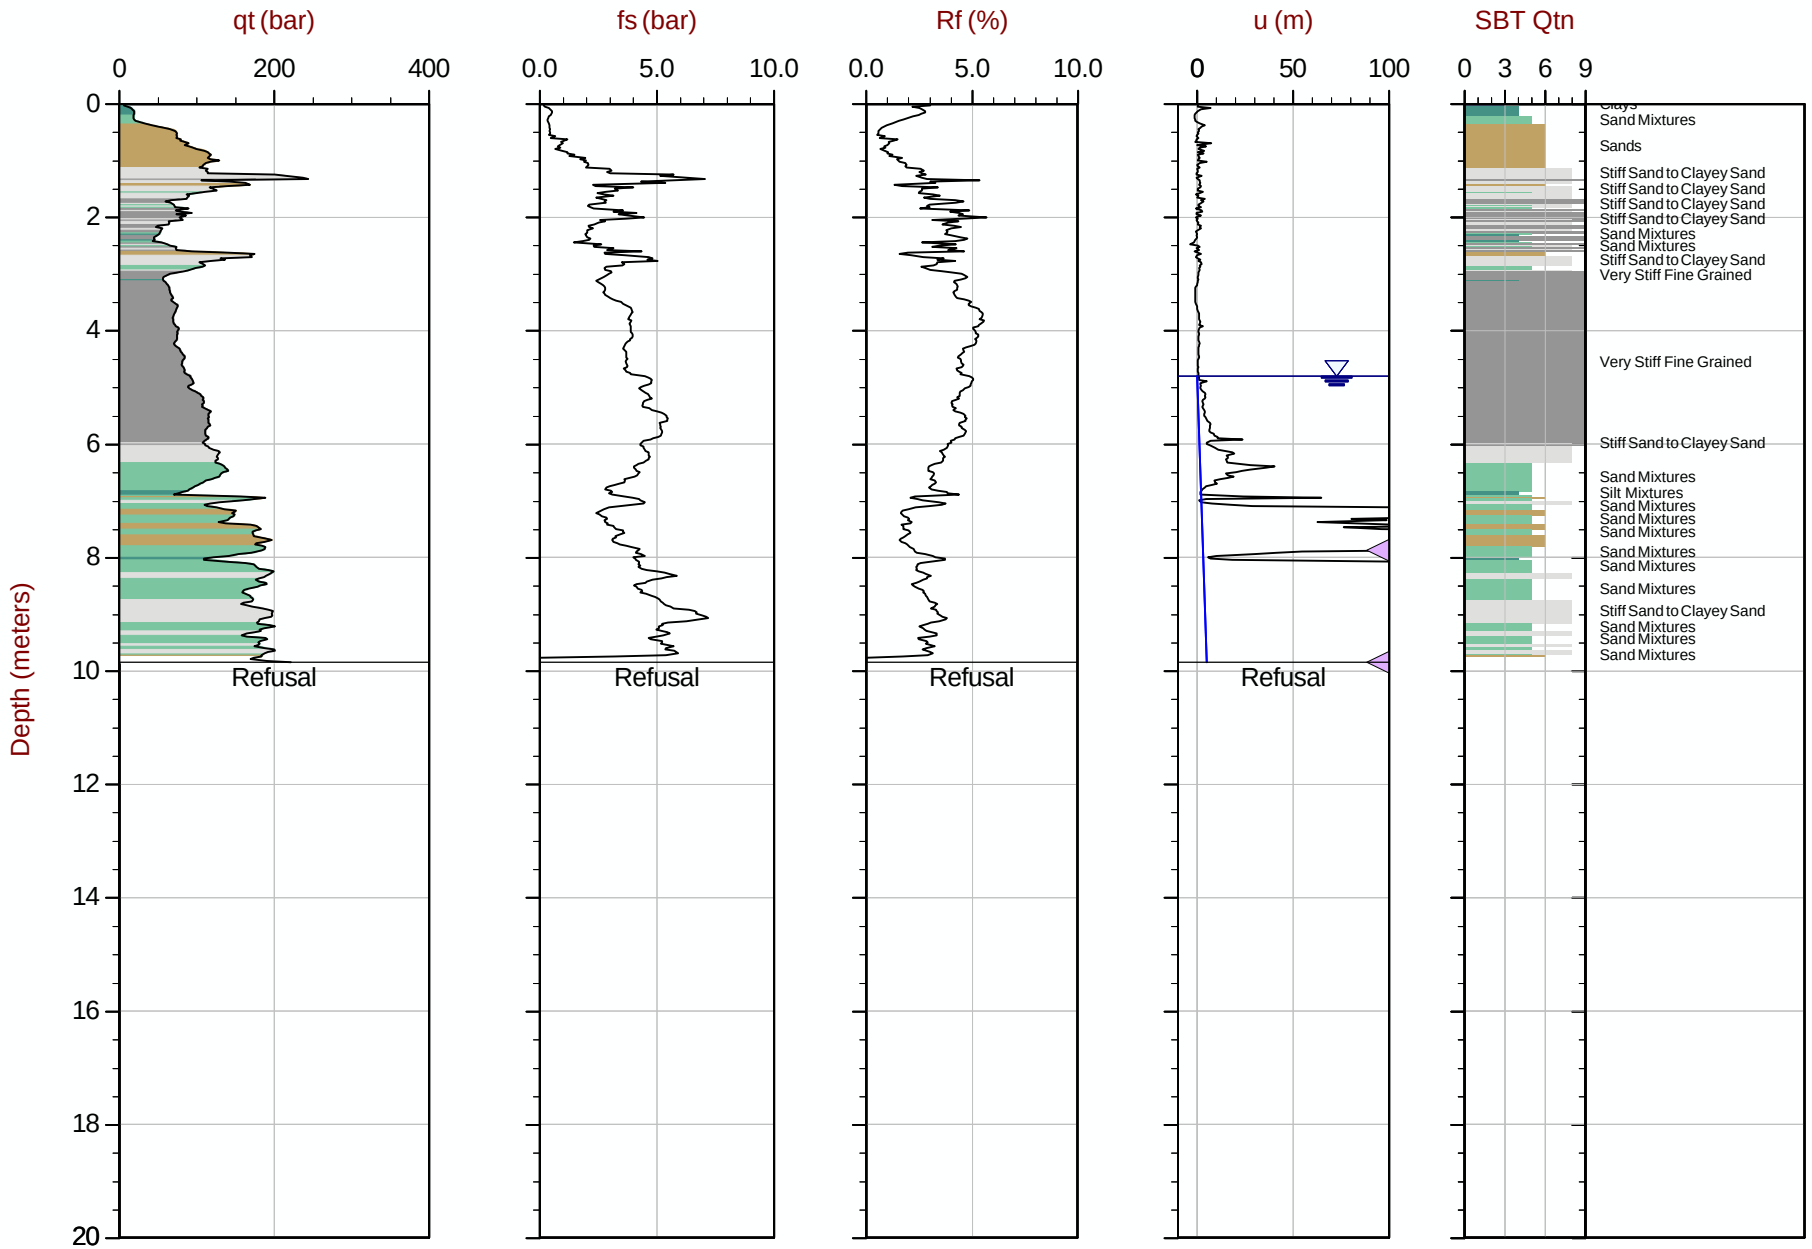

Max Depth: 9.850 m / 32.32 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT114.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612587m E: 415072m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 07:30
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT115
Cone: 822:T1000F10U35 Area= 15cm2

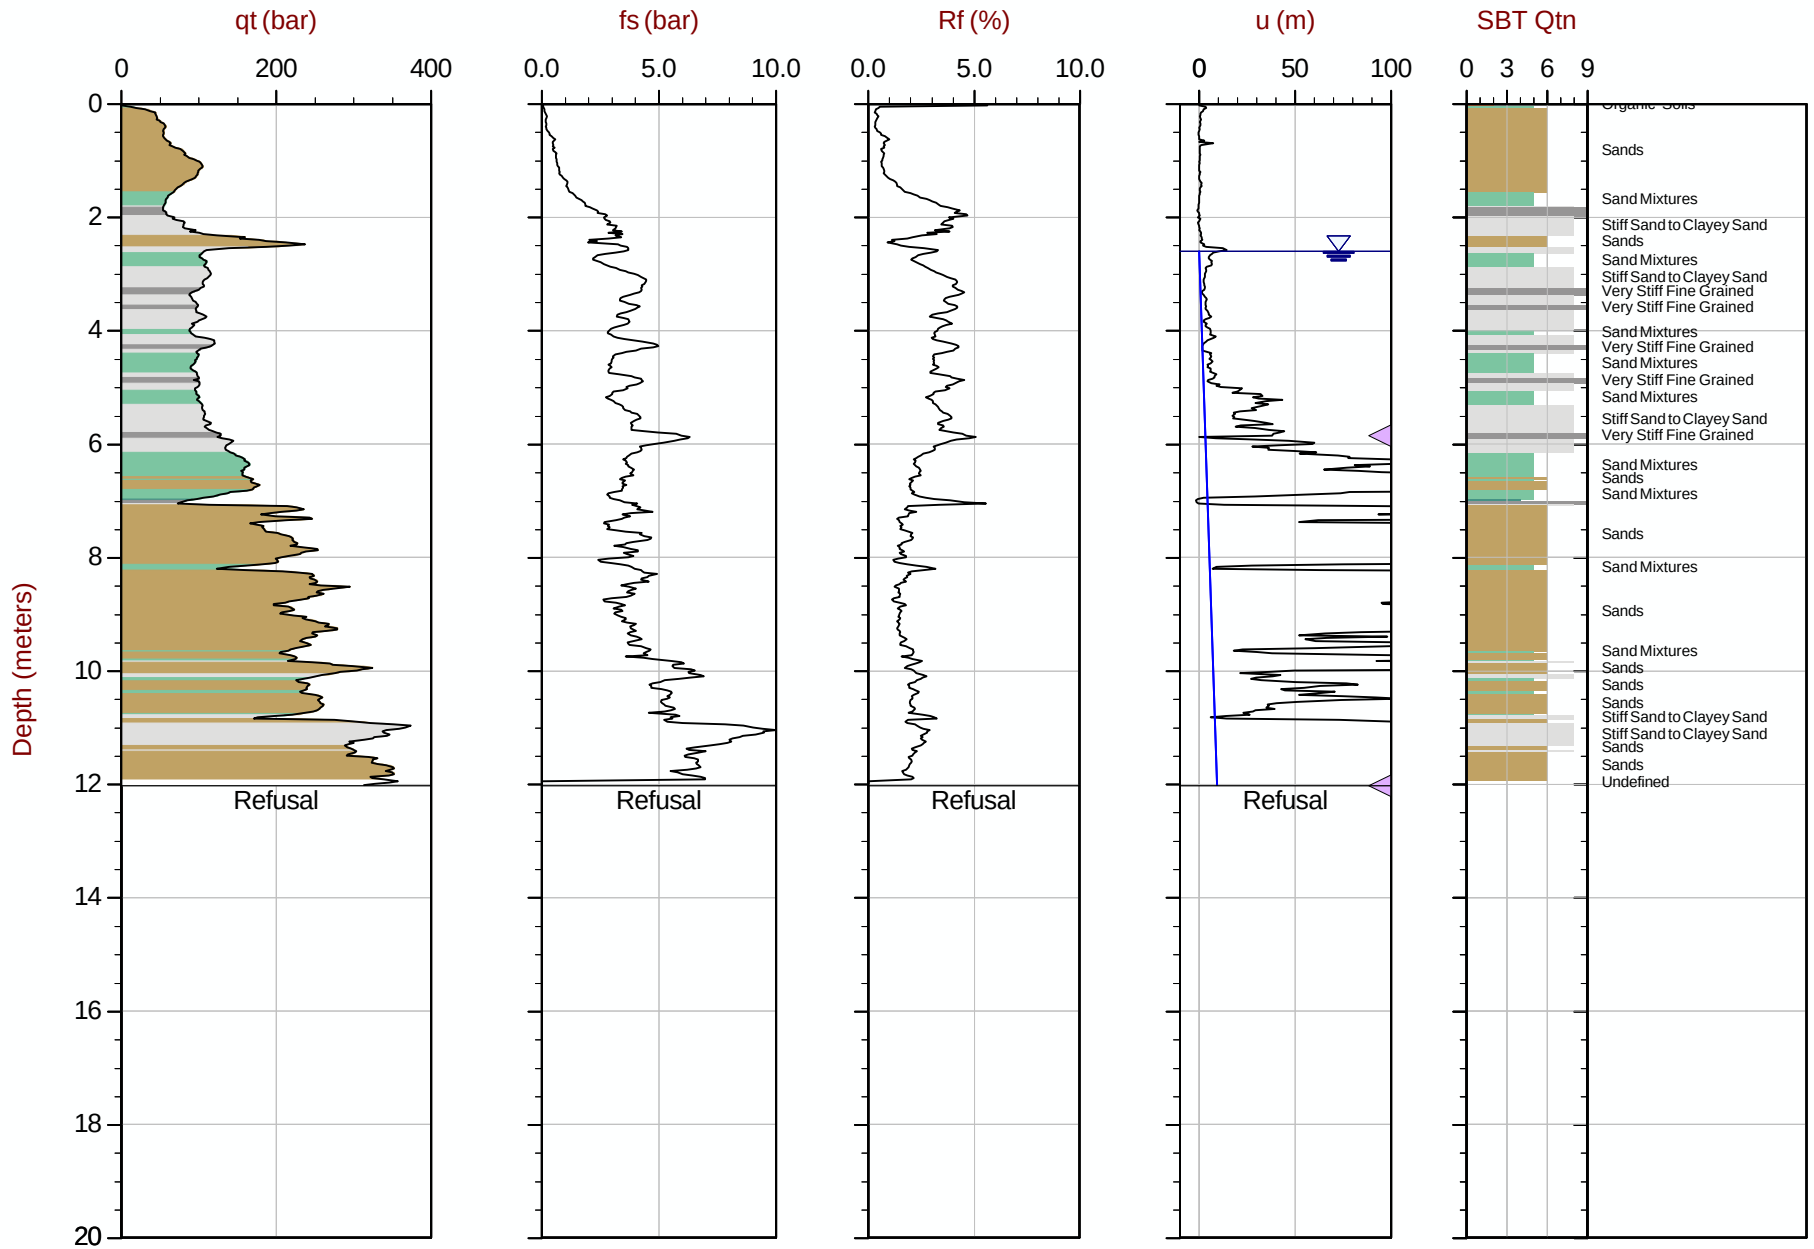

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT115.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612567m E: 415168m Elev: 776.263m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 16:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT117
Cone: 822:T1000F10U35 Area= 15cm2

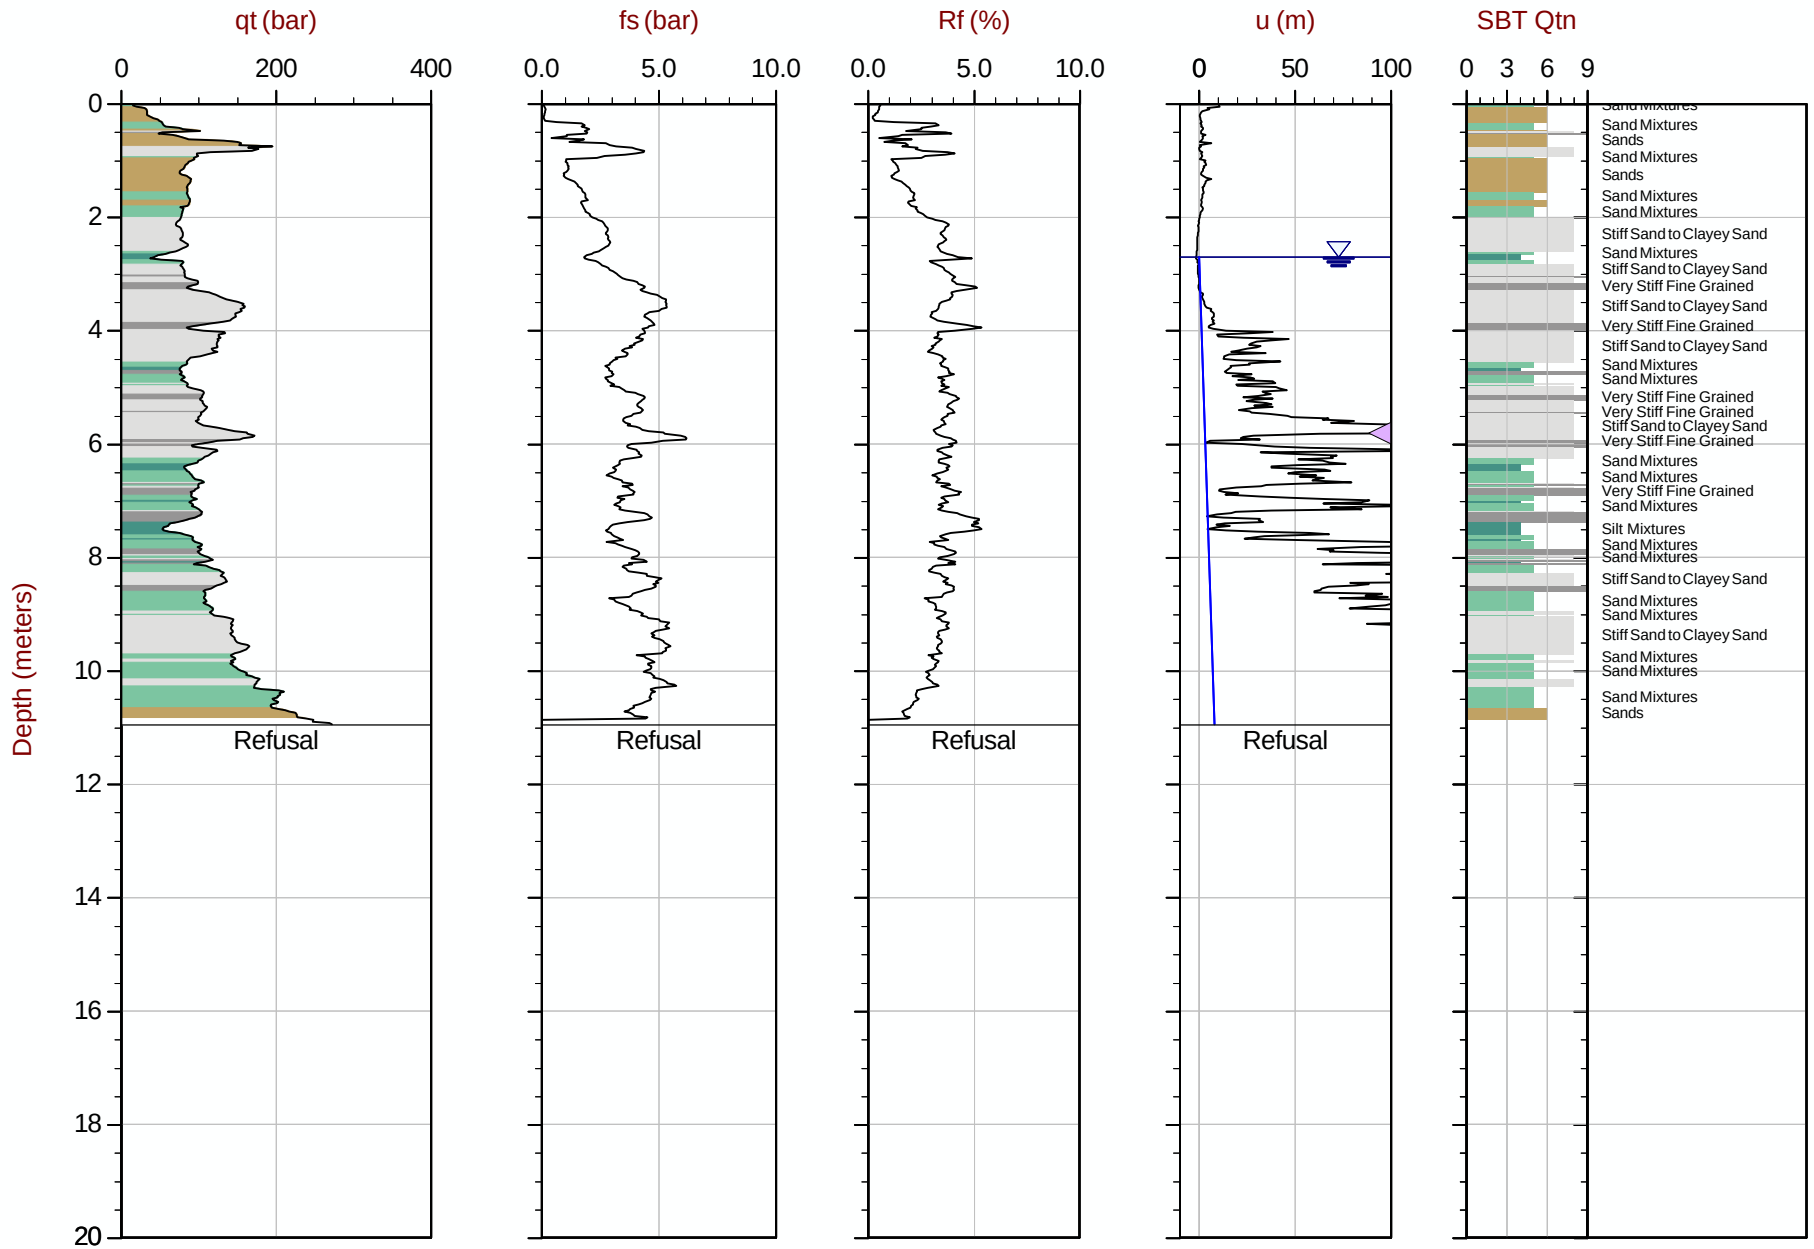

Max Depth: 10.950 m / 35.92 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT117.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612565m E: 415269m Elev: 775.224m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 08:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT118
Cone: 750:T1500F15U35 Area= 15cm2

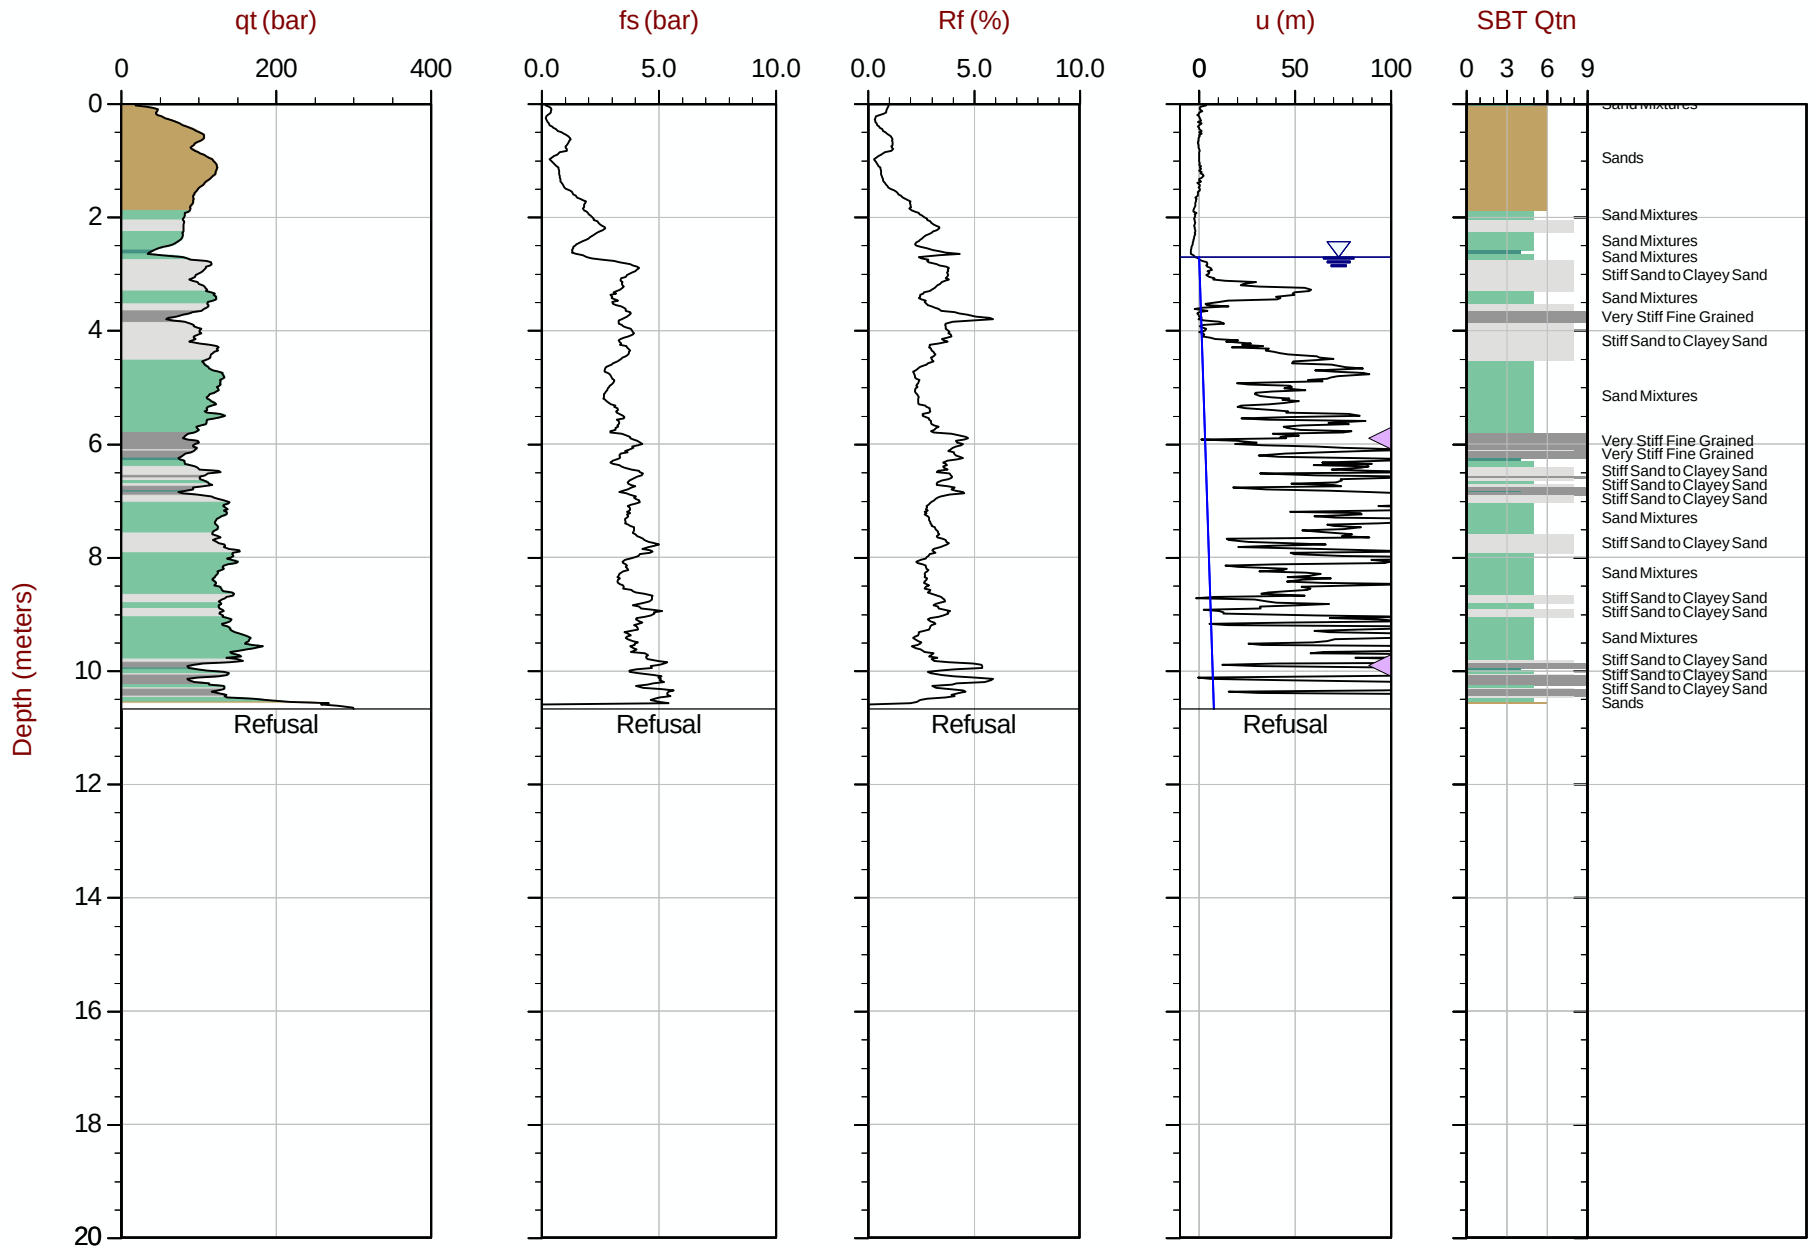

Max Depth: 10.675 m / 35.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT118.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612565m E: 415321m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 07:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT119
Cone: 750:T1500F15U35 Area= 15cm2

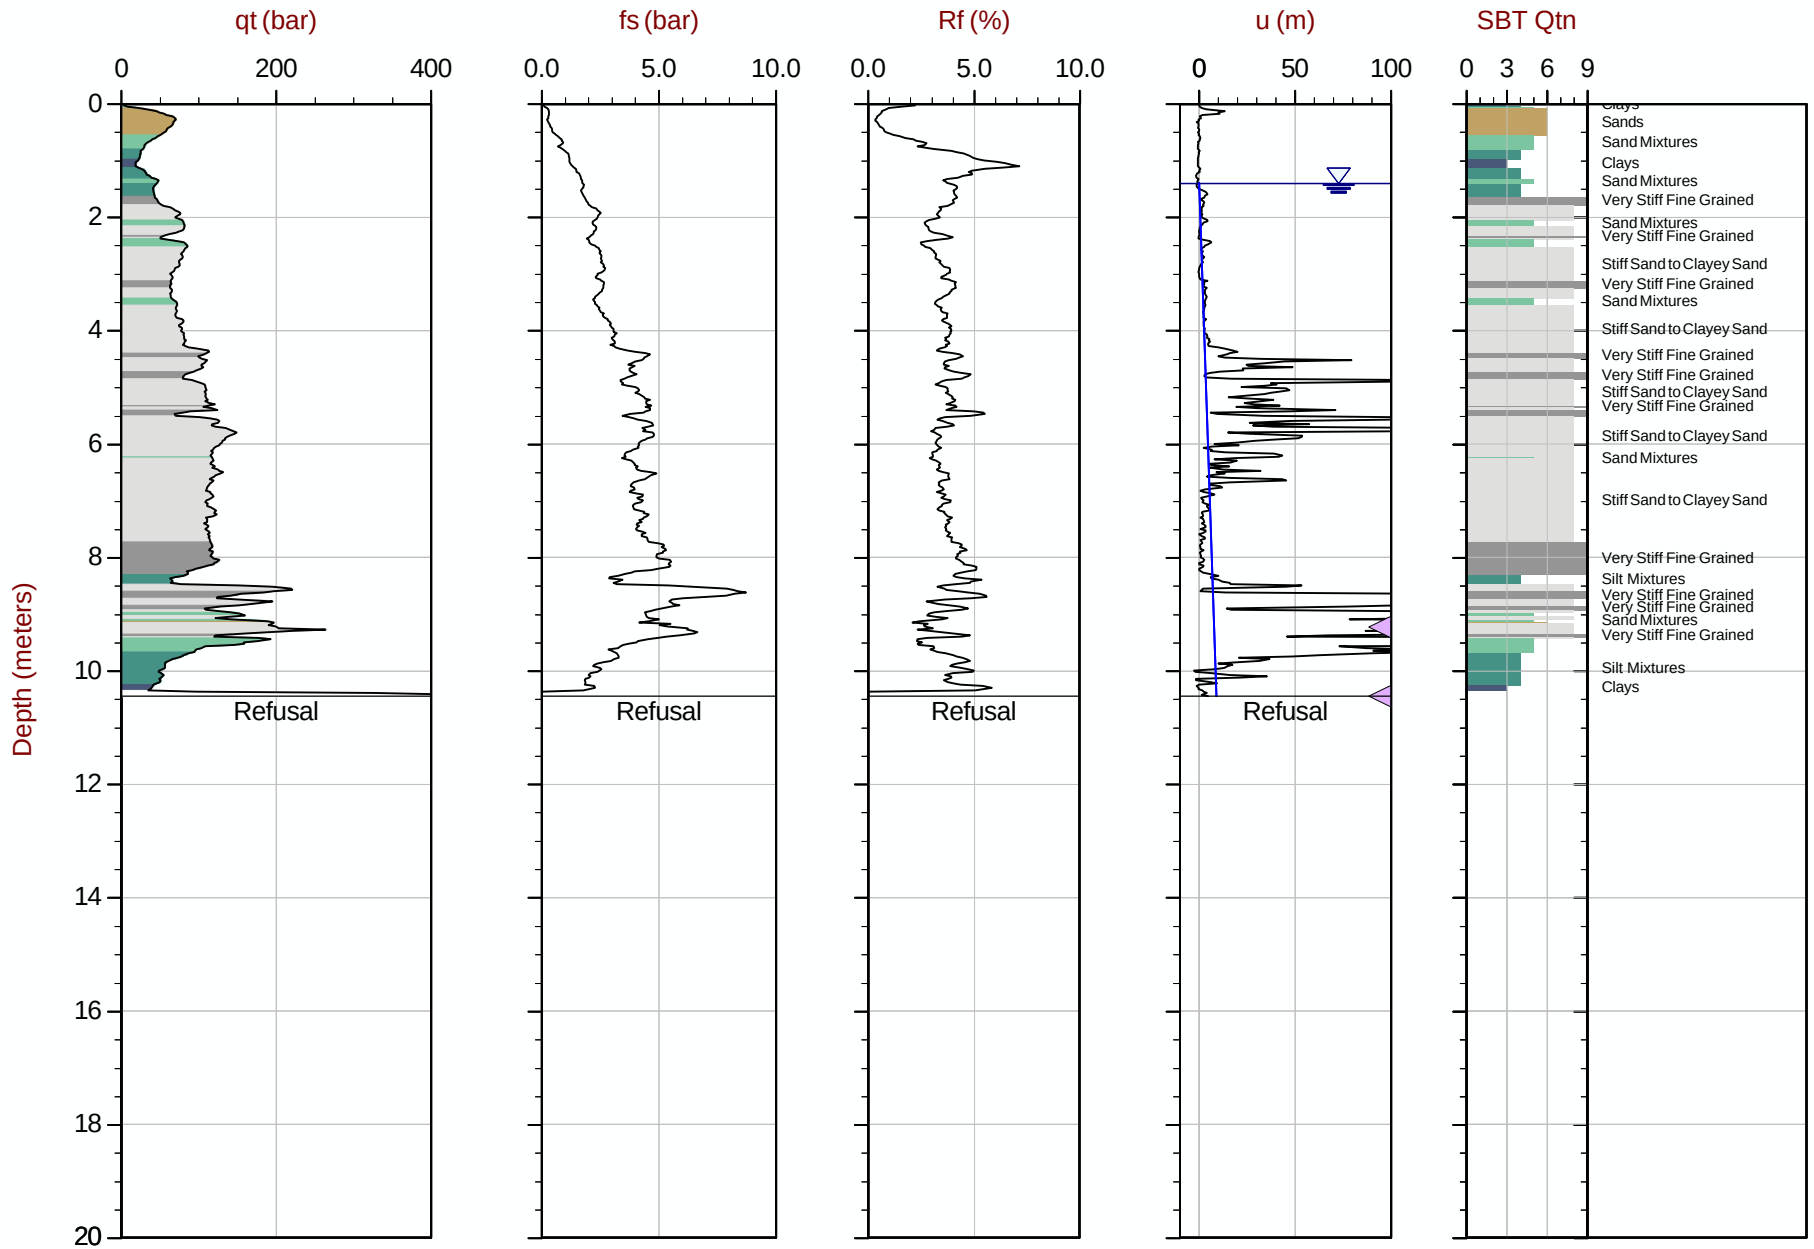

Max Depth: 10.450 m / 34.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT119.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612561m E: 415369m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 16:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT120
Cone: 750:T1500F15U35 Area= 15cm2

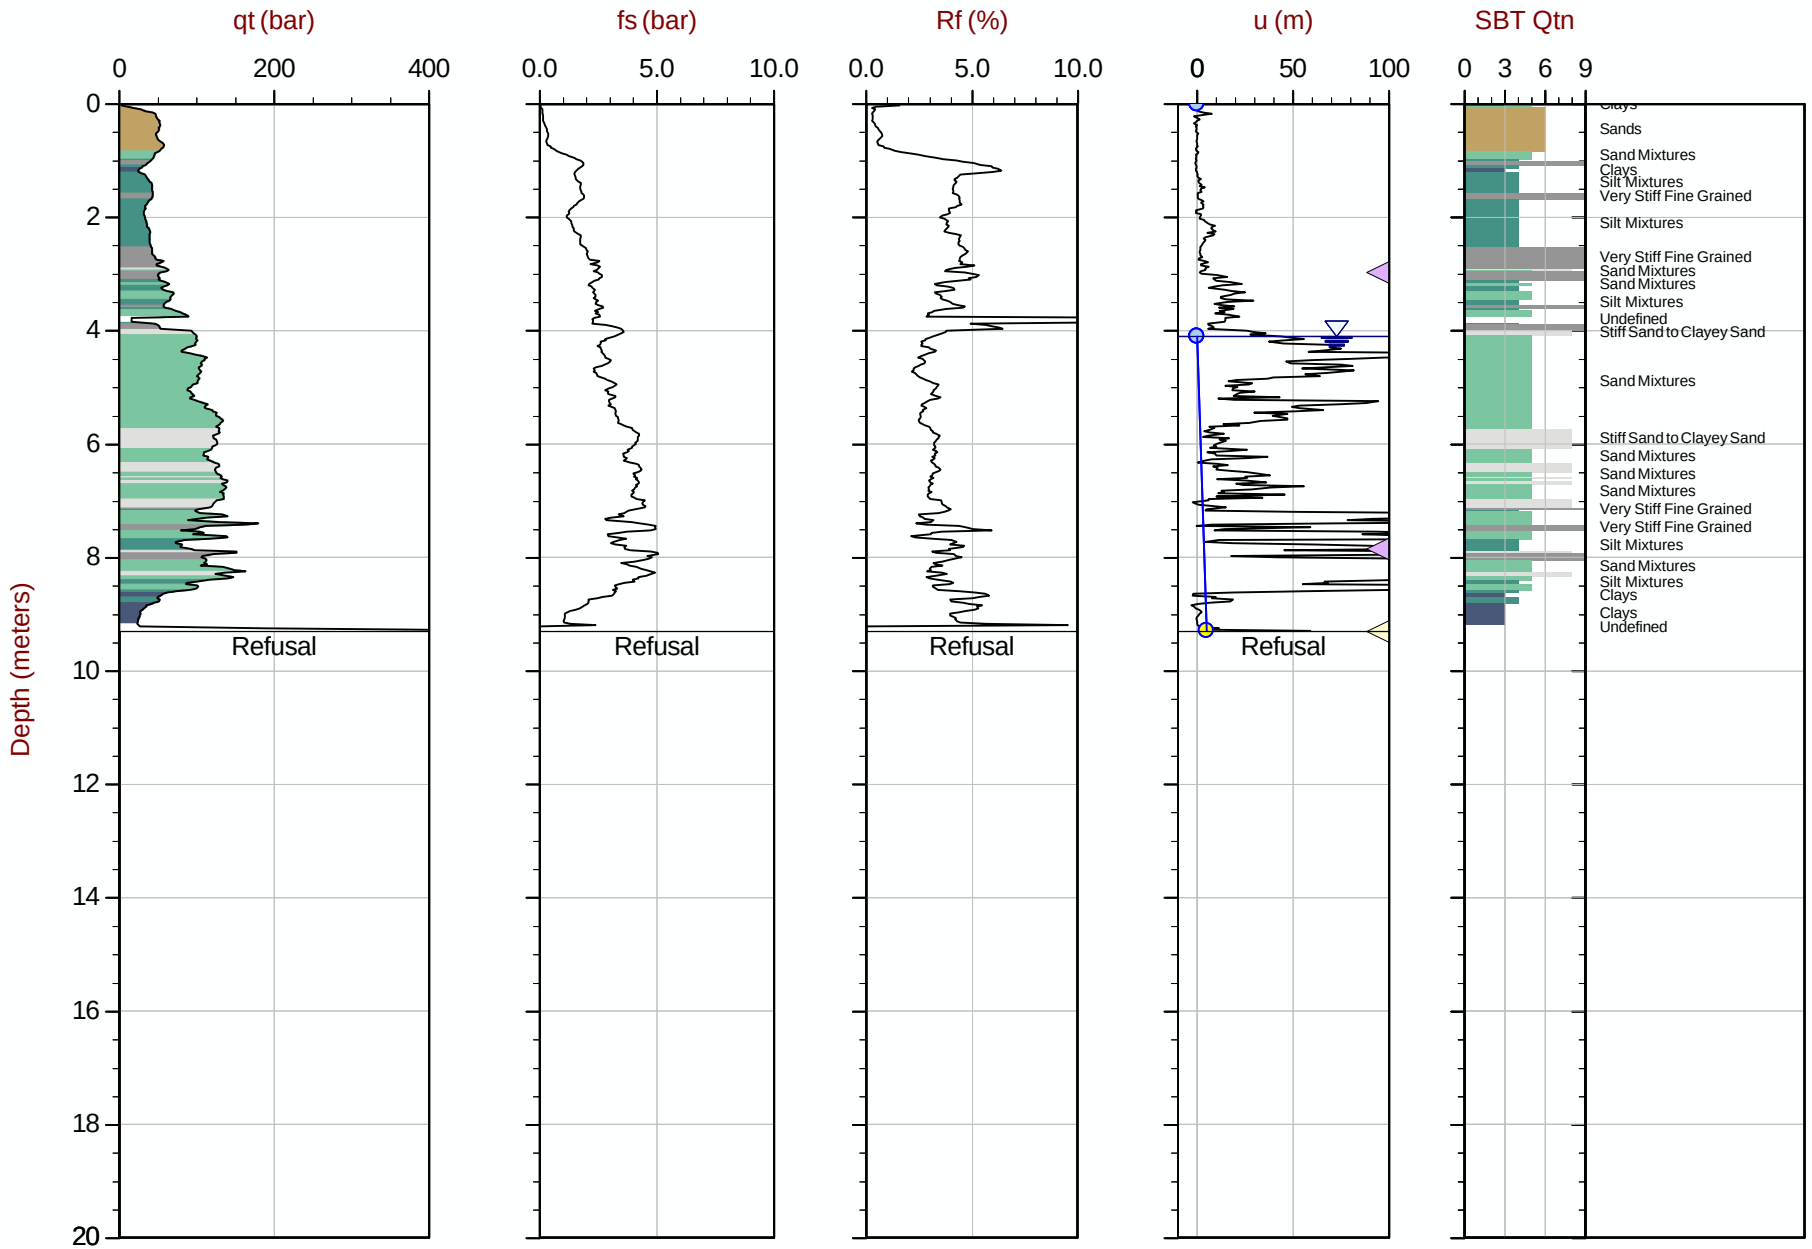

Max Depth: 9.300 m / 30.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT120.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612553m E: 415421m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 15:53
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT121
Cone: 750:T1500F15U35 Area= 15cm2

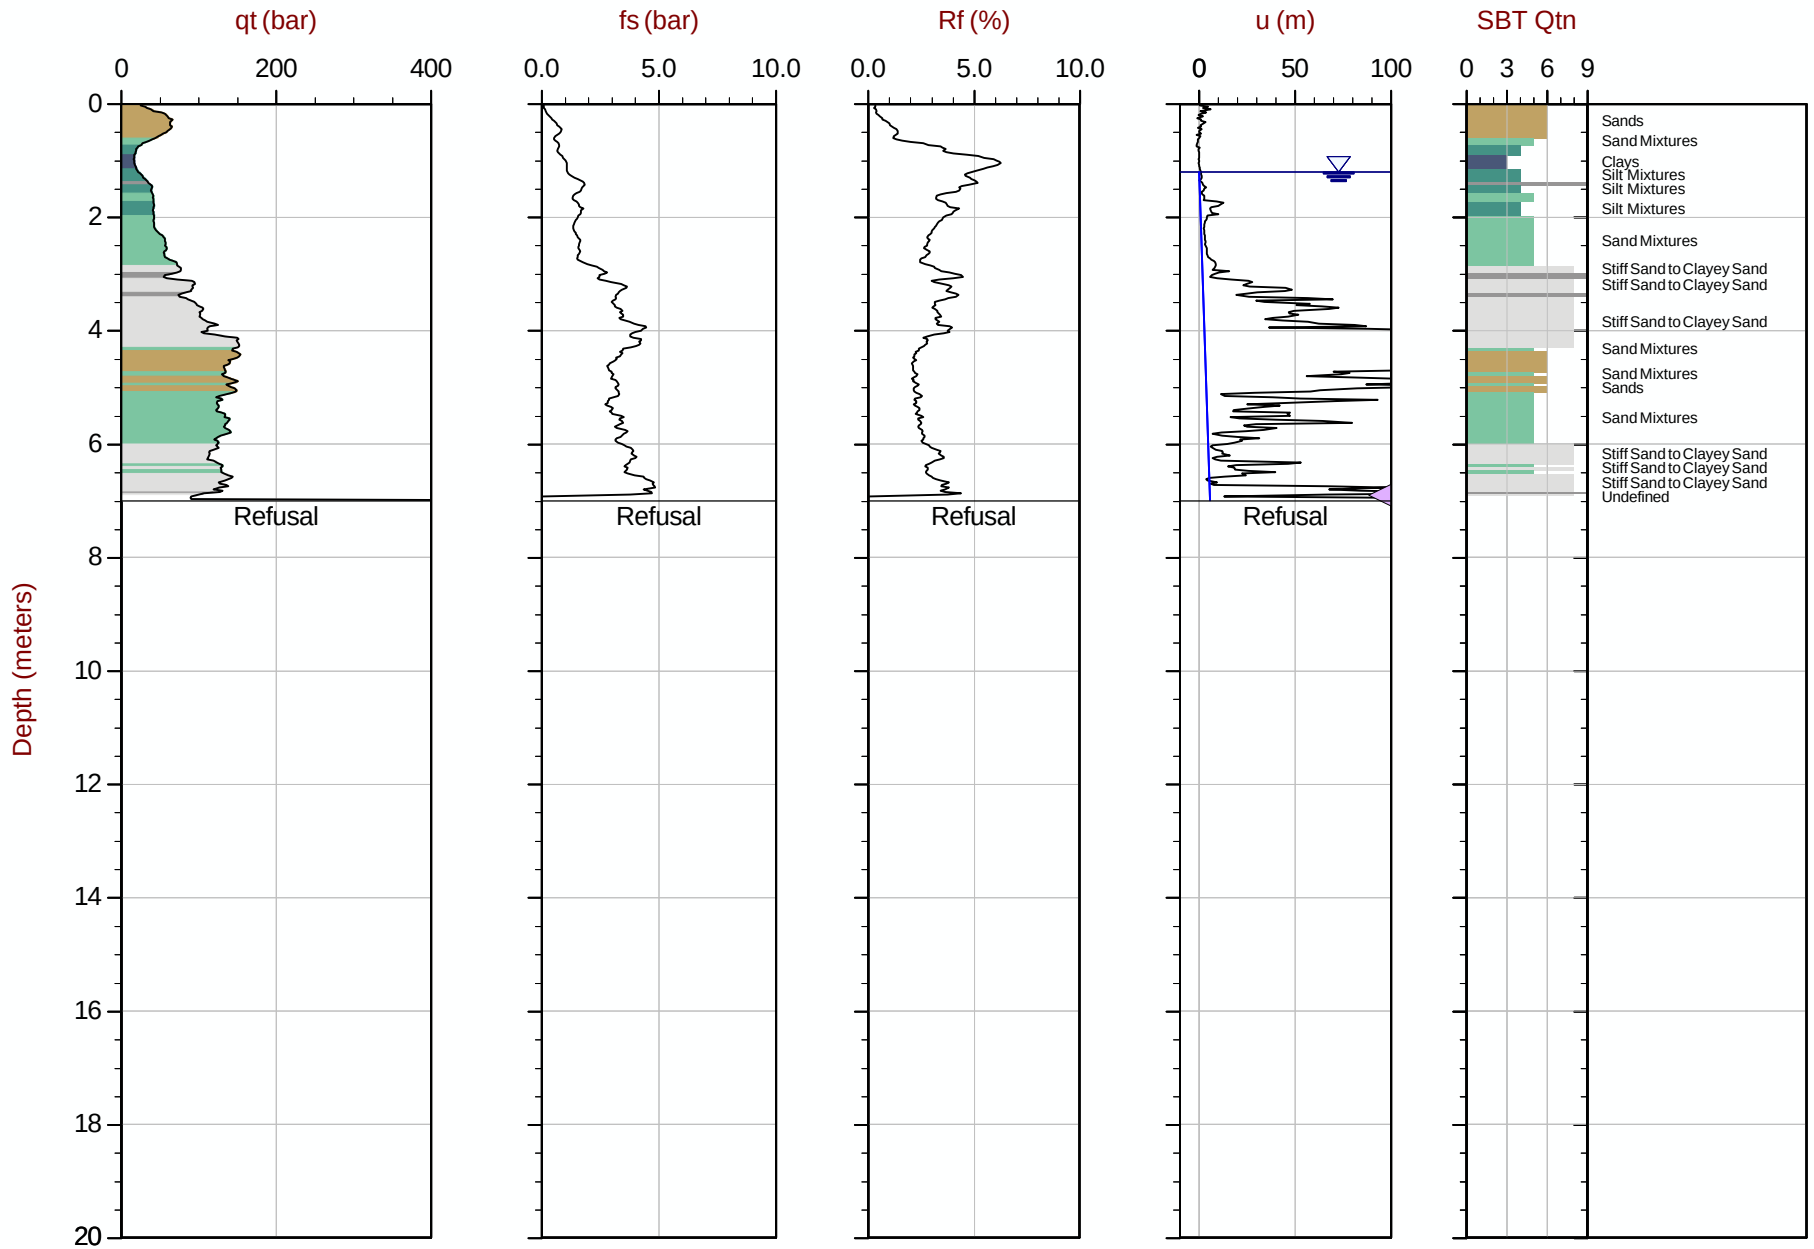

Max Depth: 7.000 m / 22.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT121.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612552m E: 415467m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 15:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT122
Cone: 822:T1000F10U35 Area= 15cm2

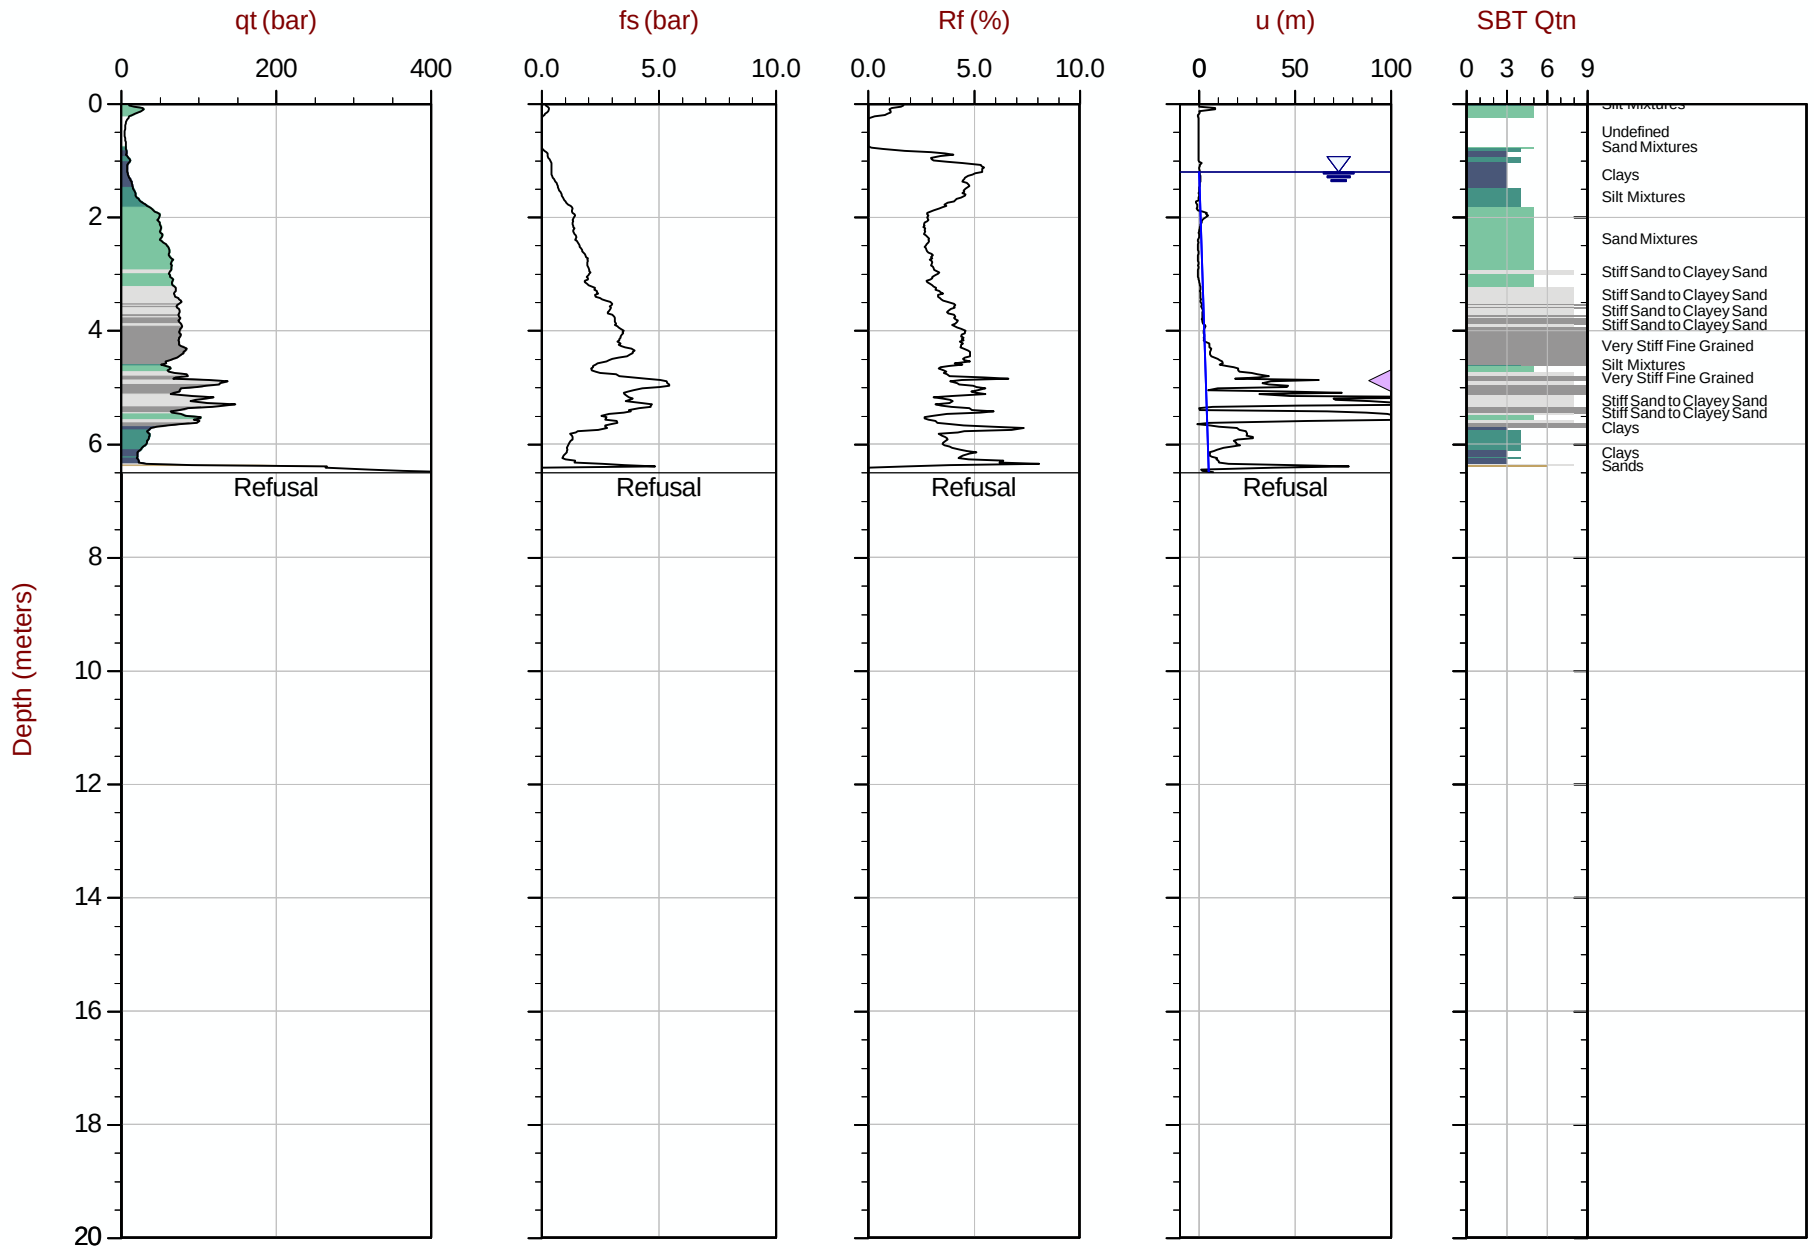

Max Depth: 6.500 m / 21.33 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT122.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612546m E: 415510m Elev: 772.300m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 13:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT123
Cone: 822:T1000F10U35 Area= 15cm2

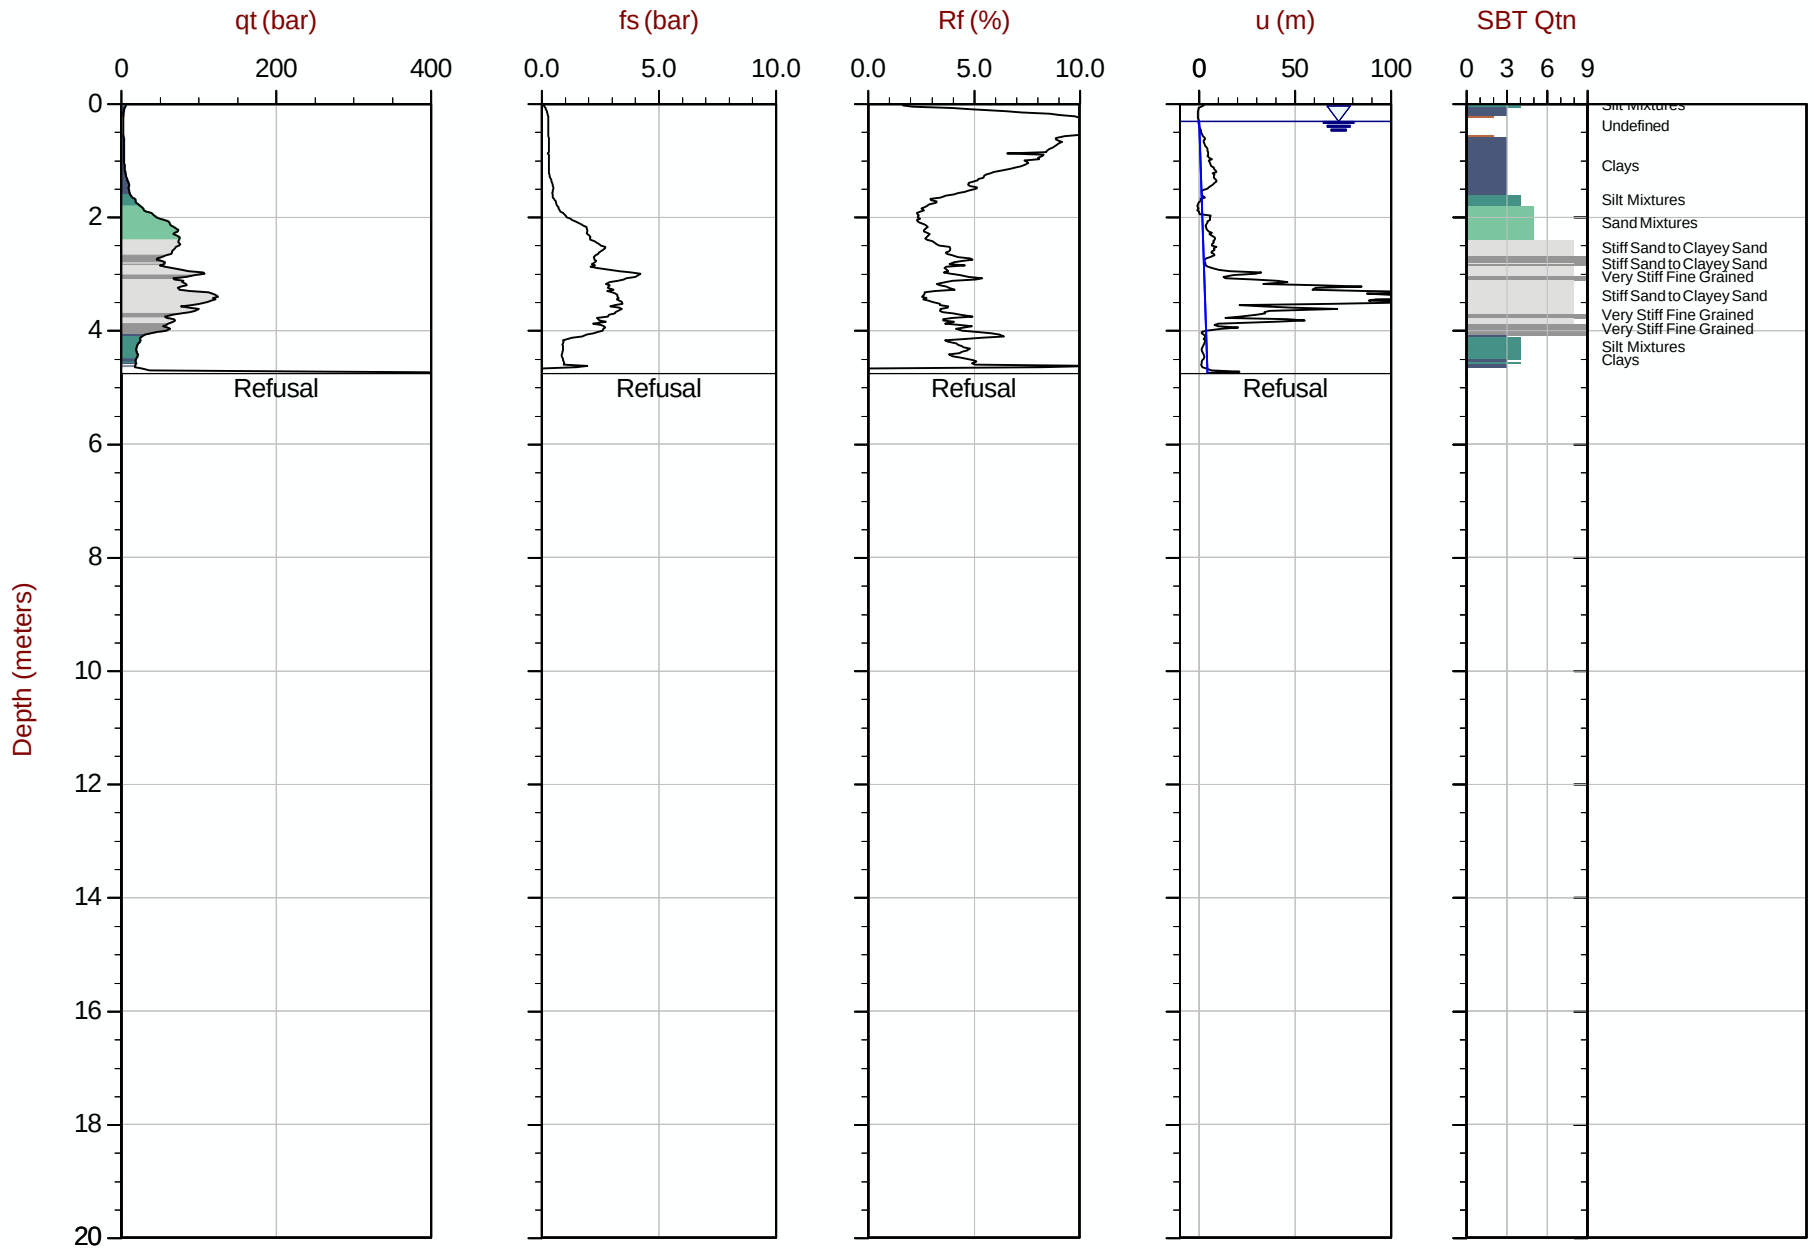

Max Depth: 4.750 m / 15.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT123.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612545m E: 415572m Elev: 771.601m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 13:29
Site: Brooks, Alberta

Sounding: RCPT22-22CPT123B
Cone: 822:T1000F10U35 Area= 15cm2

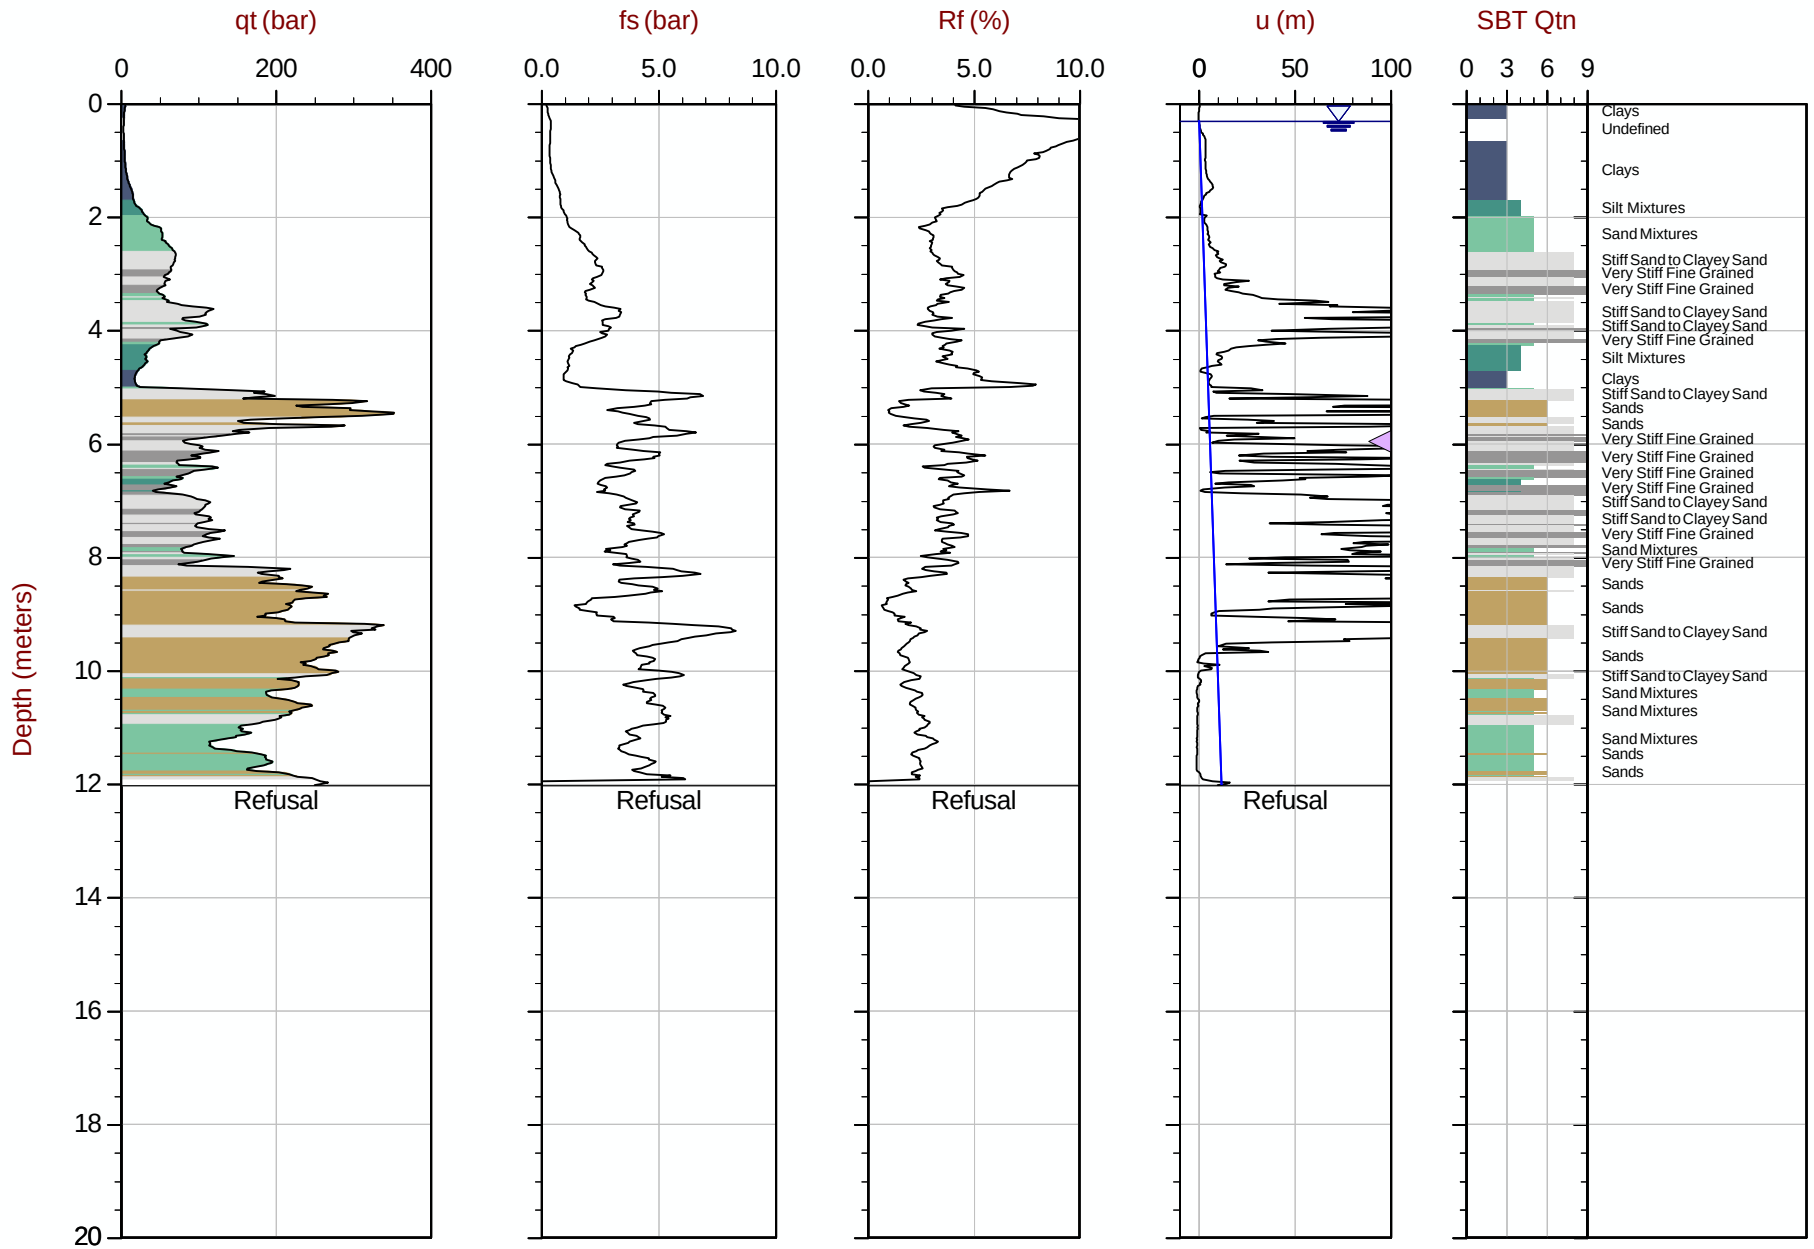

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT123B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612545m E: 415569m Elev: 771.600m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 11:12
Site: Brooks, Alberta

Sounding: RCPT22-22CPT124
Cone: 822:T1000F10U35 Area= 15cm2

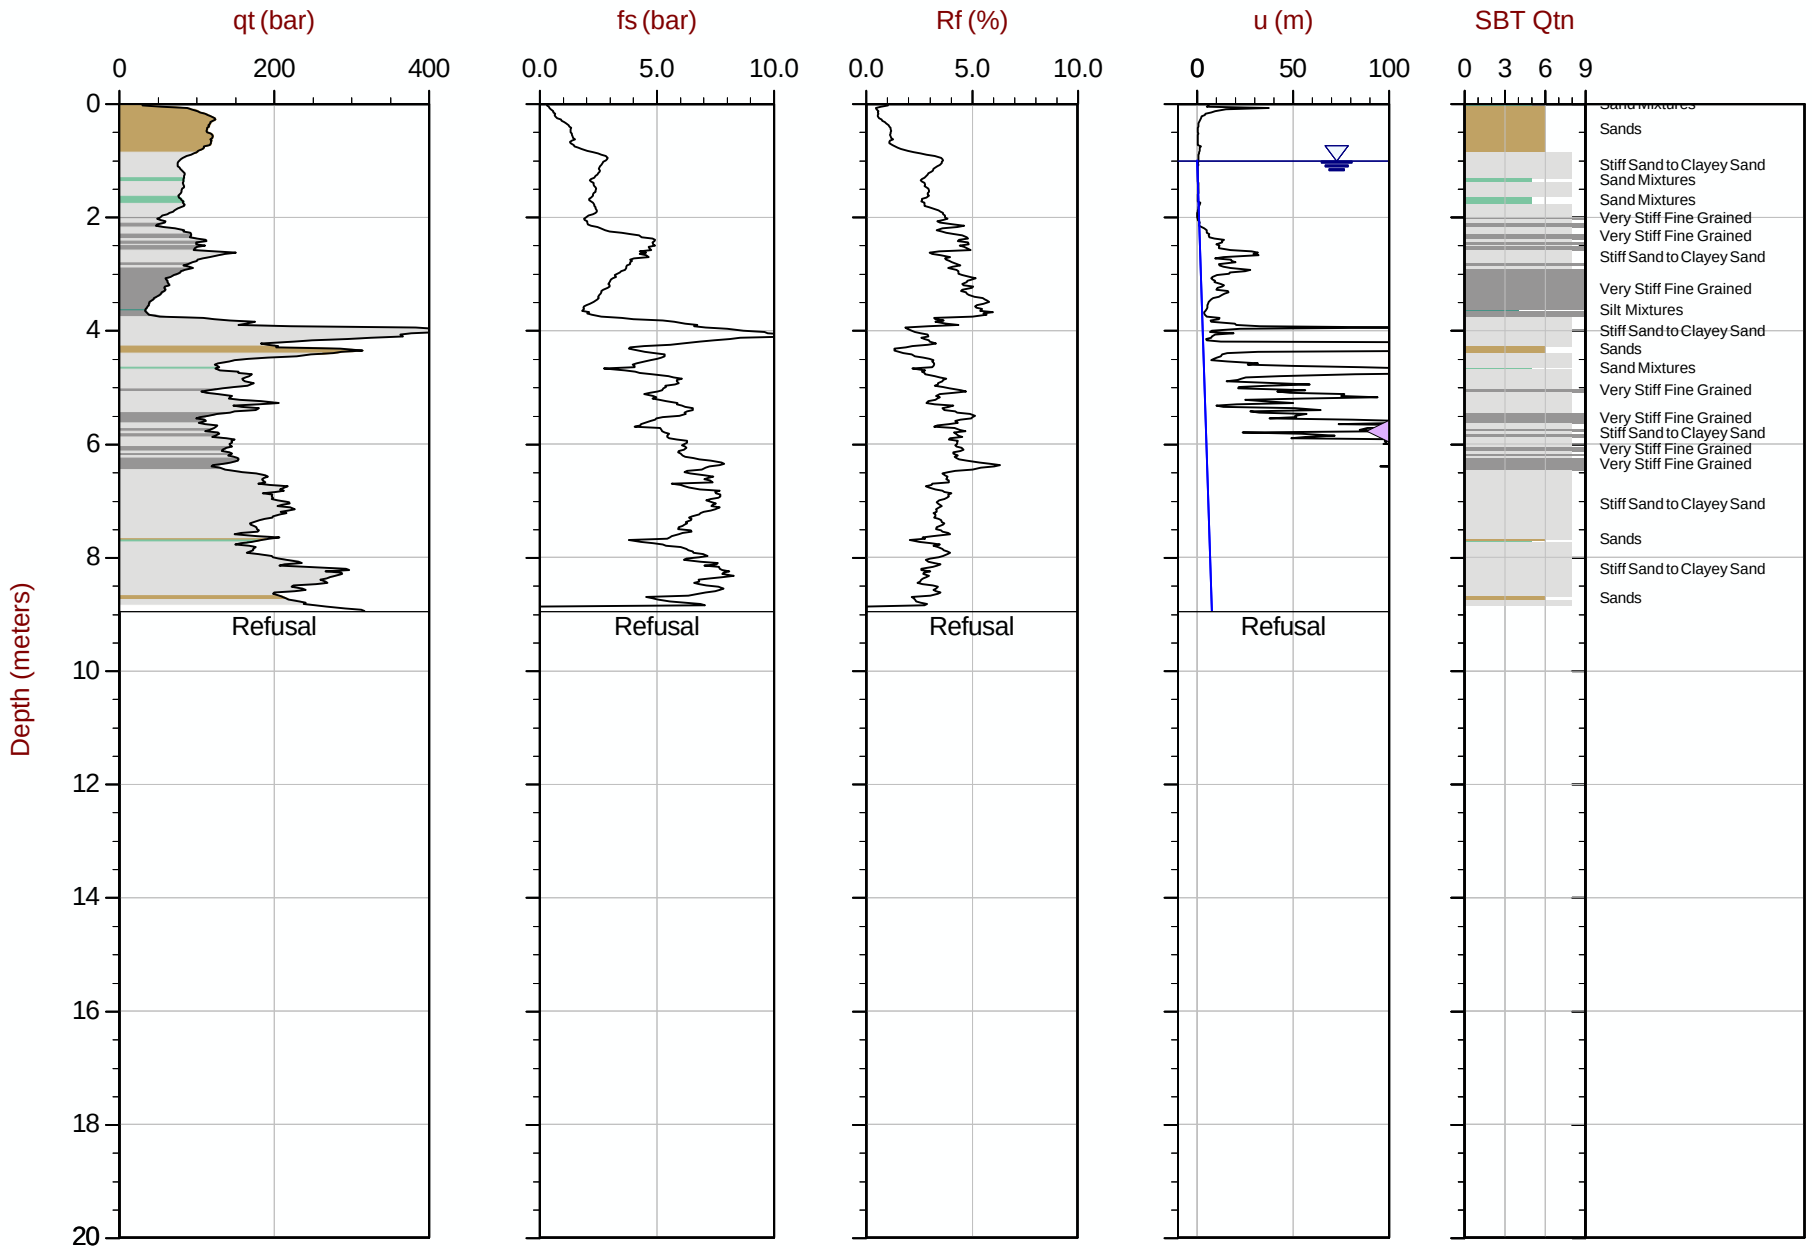

Max Depth: 8.950 m / 29.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT124.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612542m E: 415620m Elev: 770.903m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 10:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT125
Cone: 822:T1000F10U35 Area= 15cm2

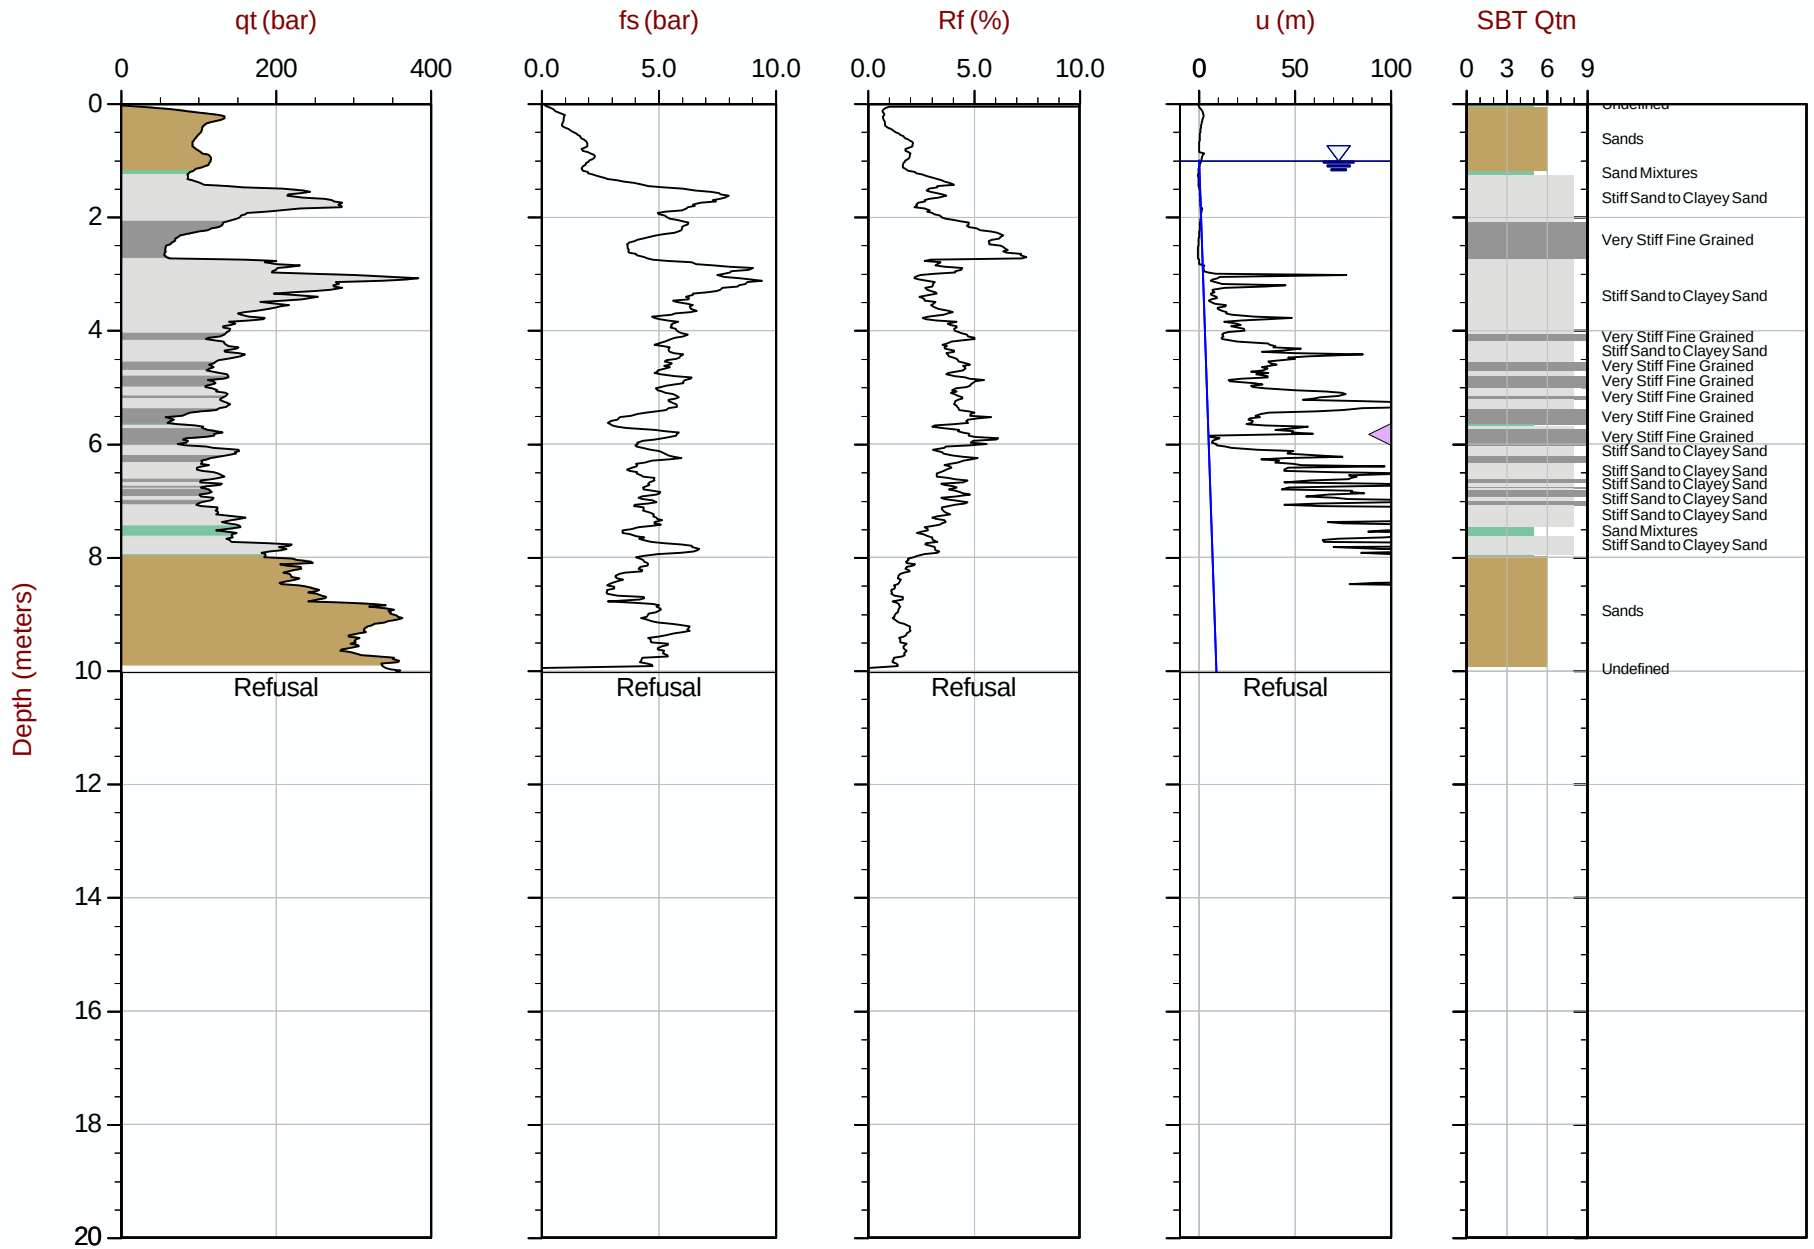

Max Depth: 10.025 m / 32.89 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT125.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612540m E: 415671m Elev: 770.690m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 12:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT126
Cone: 750:T1500F15U35 Area= 15cm2

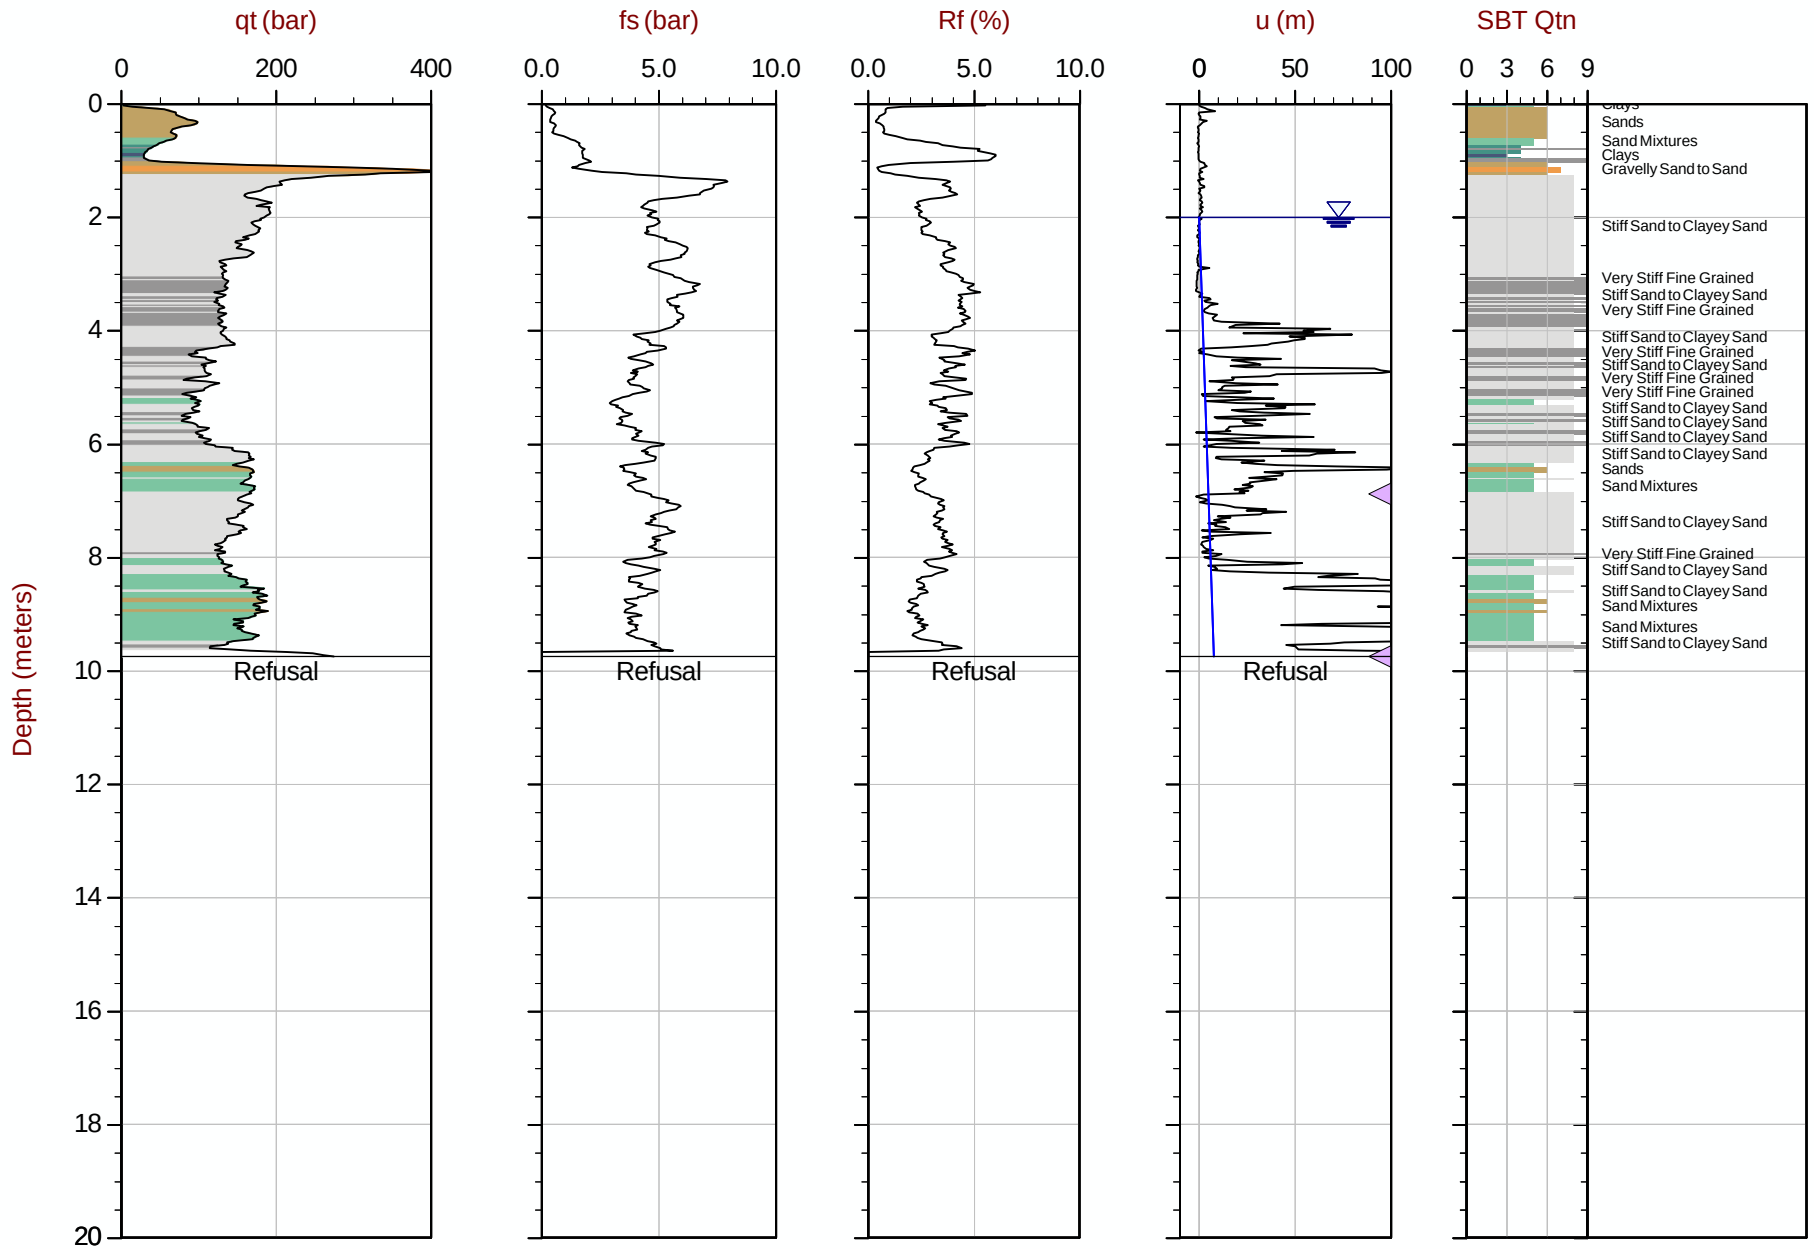

Max Depth: 9.750 m / 31.99 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT126.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612538m E: 415720m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 11:19
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT127
Cone: 750:T1500F15U35 Area= 15cm2

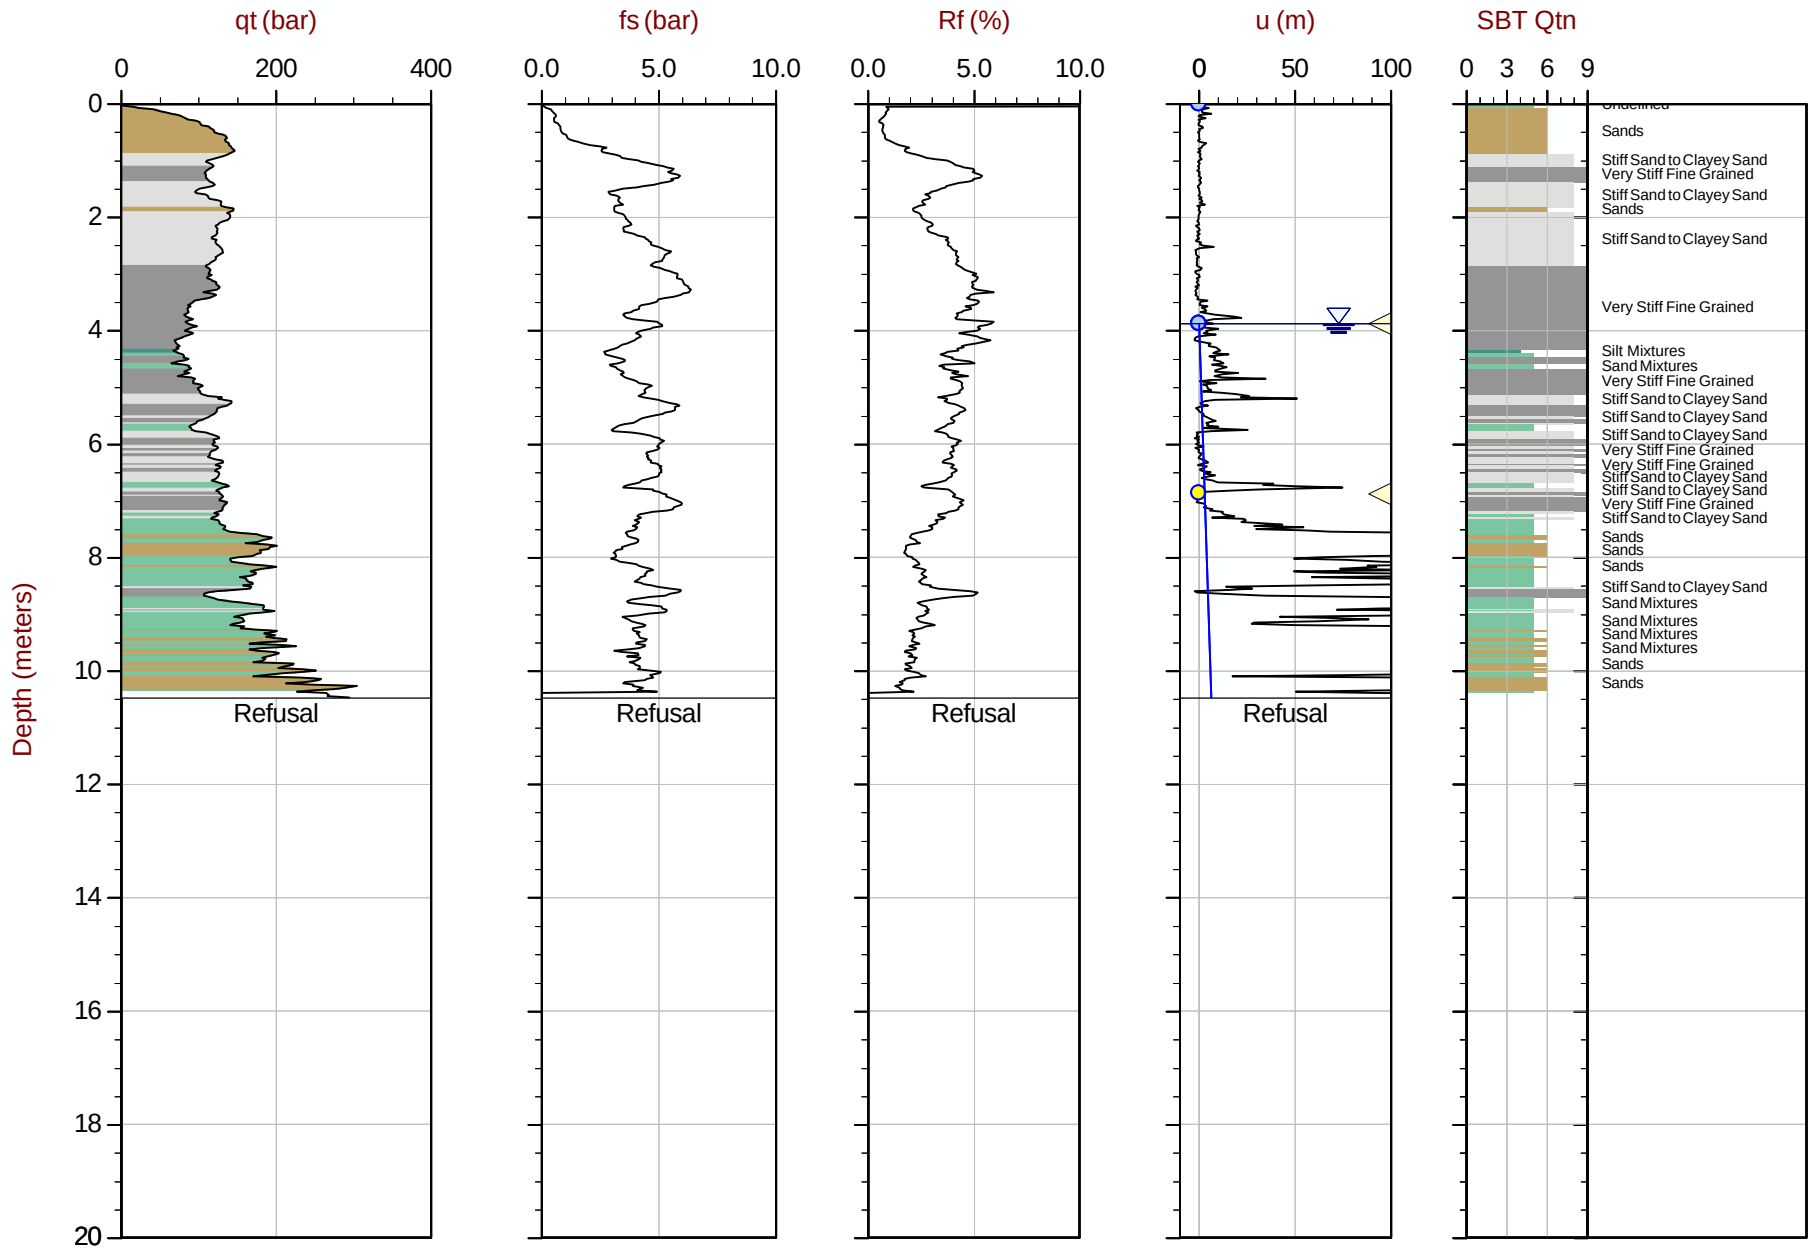

Max Depth: 10.475 m / 34.37 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT127.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612537m E: 415770m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 09:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT128
Cone: 750:T1500F15U35 Area= 15cm2

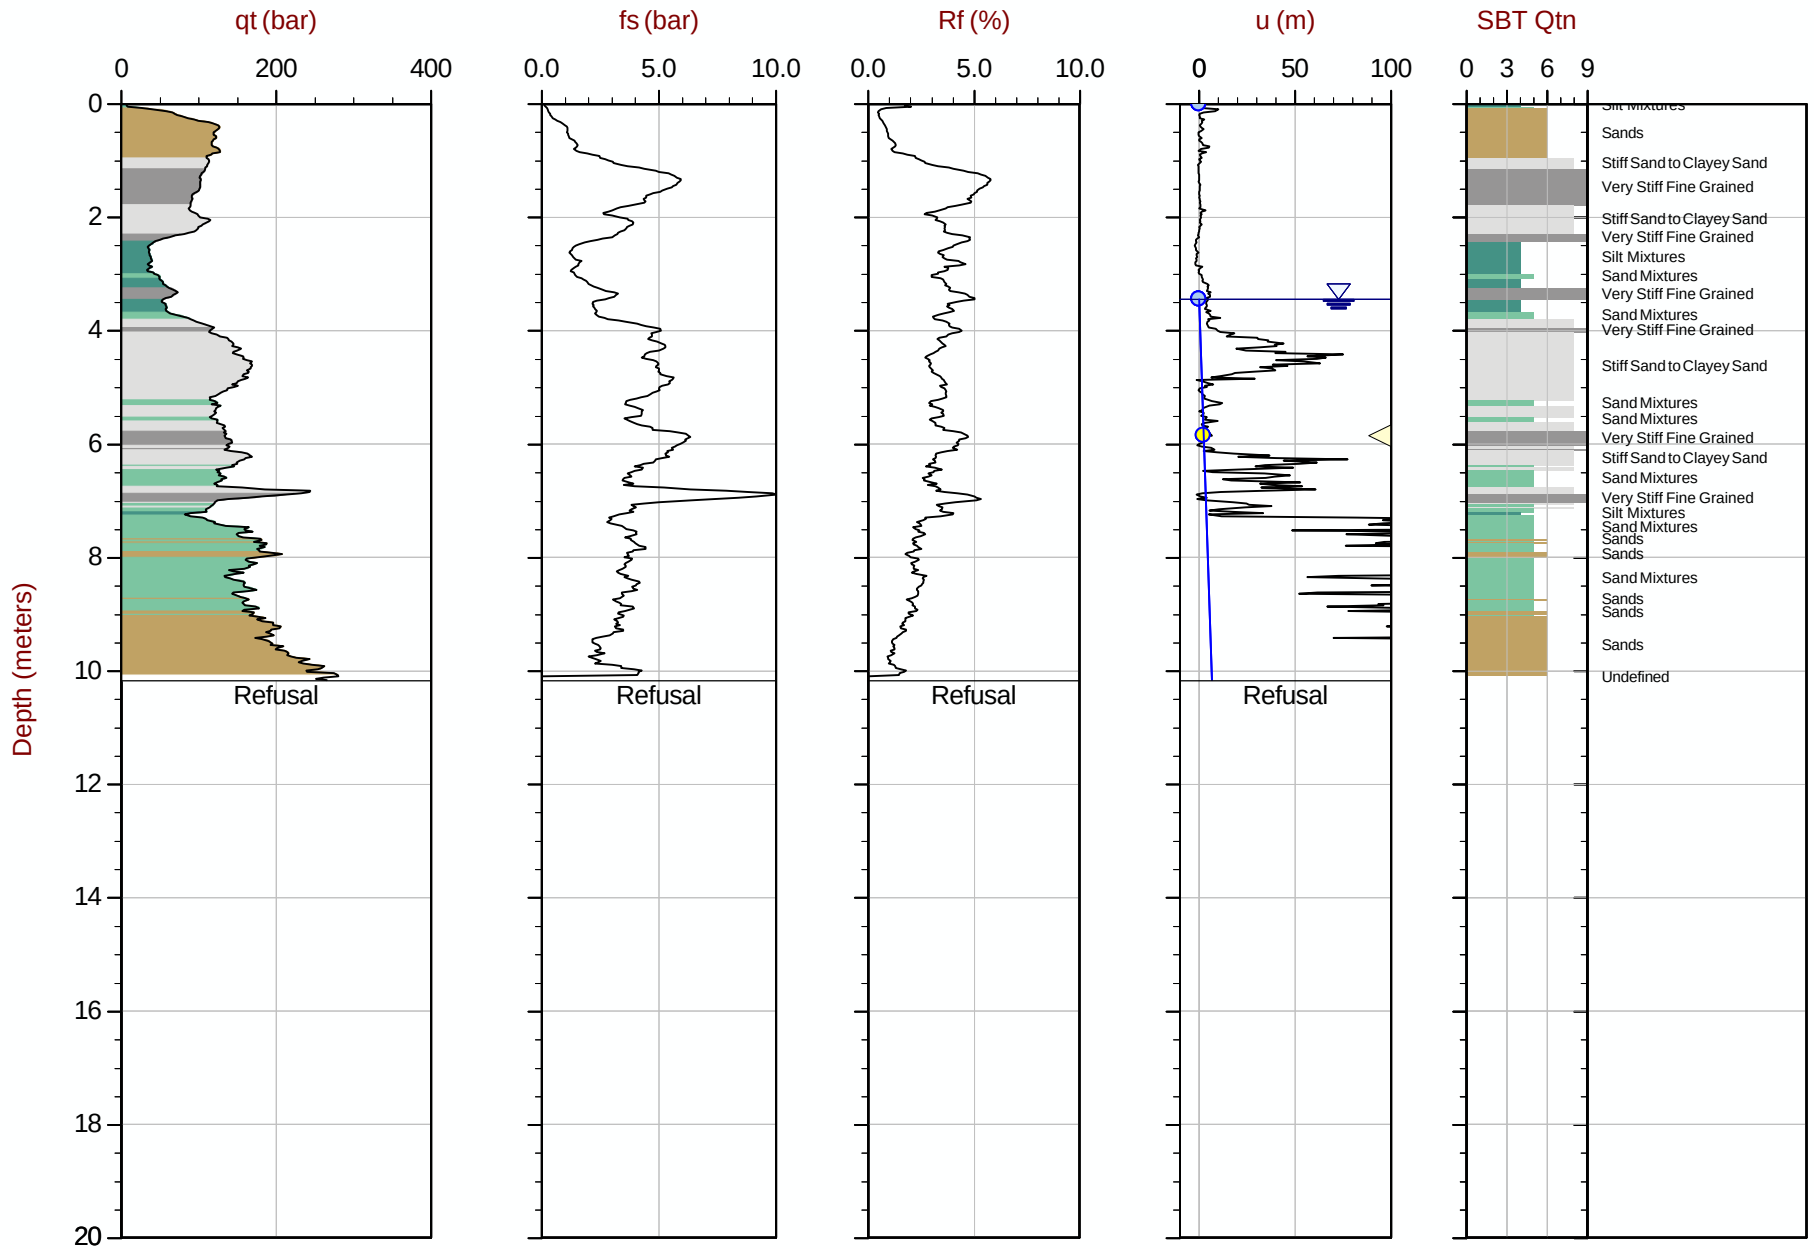

Max Depth: 10.175 m / 33.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT128.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612536m E: 415820m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 08:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129
Cone: 821:T1000F10U35 Area= 15cm2

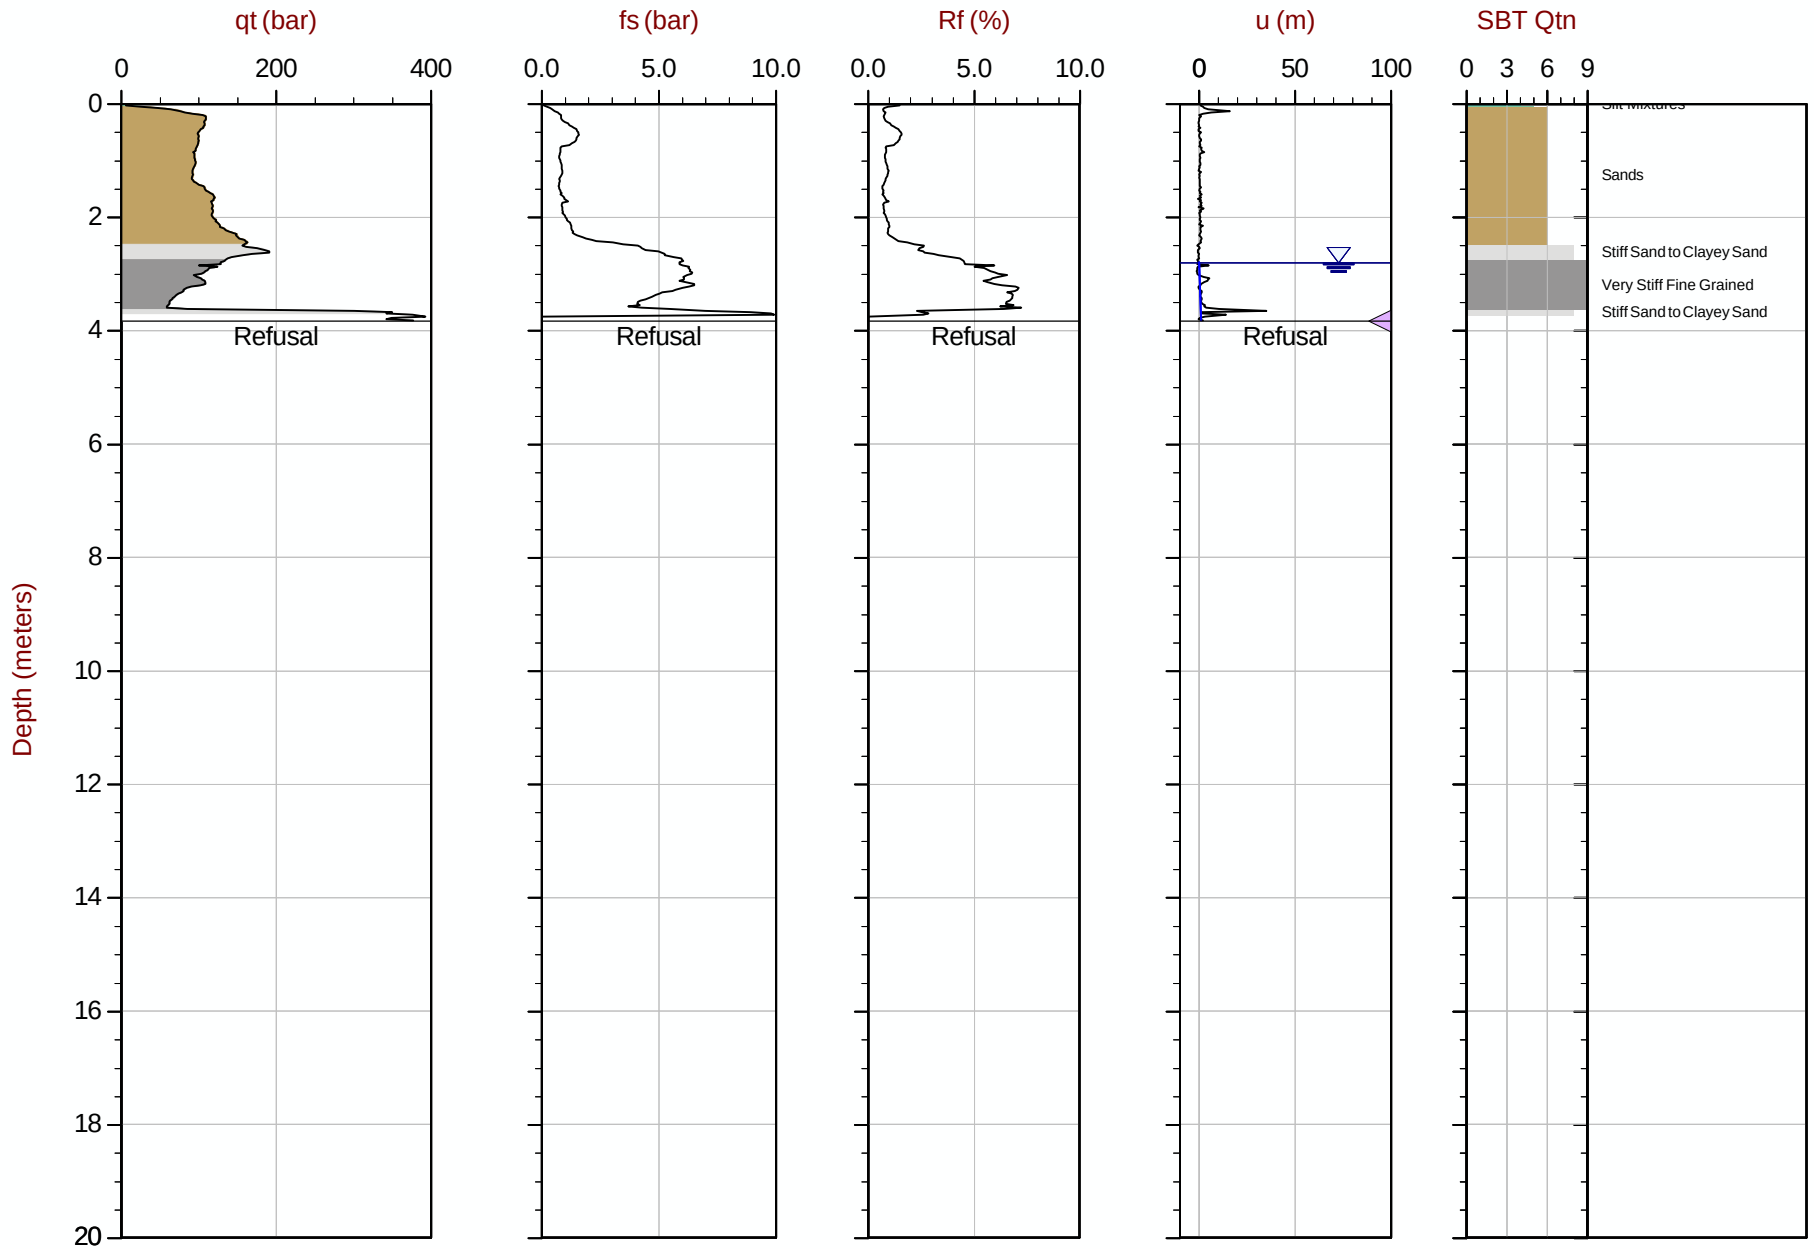

Max Depth: 3.825 m / 12.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT129.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612534m E: 415870m Elev: 769.474m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 08:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129B
Cone: 821:T1000F10U35 Area= 15cm2

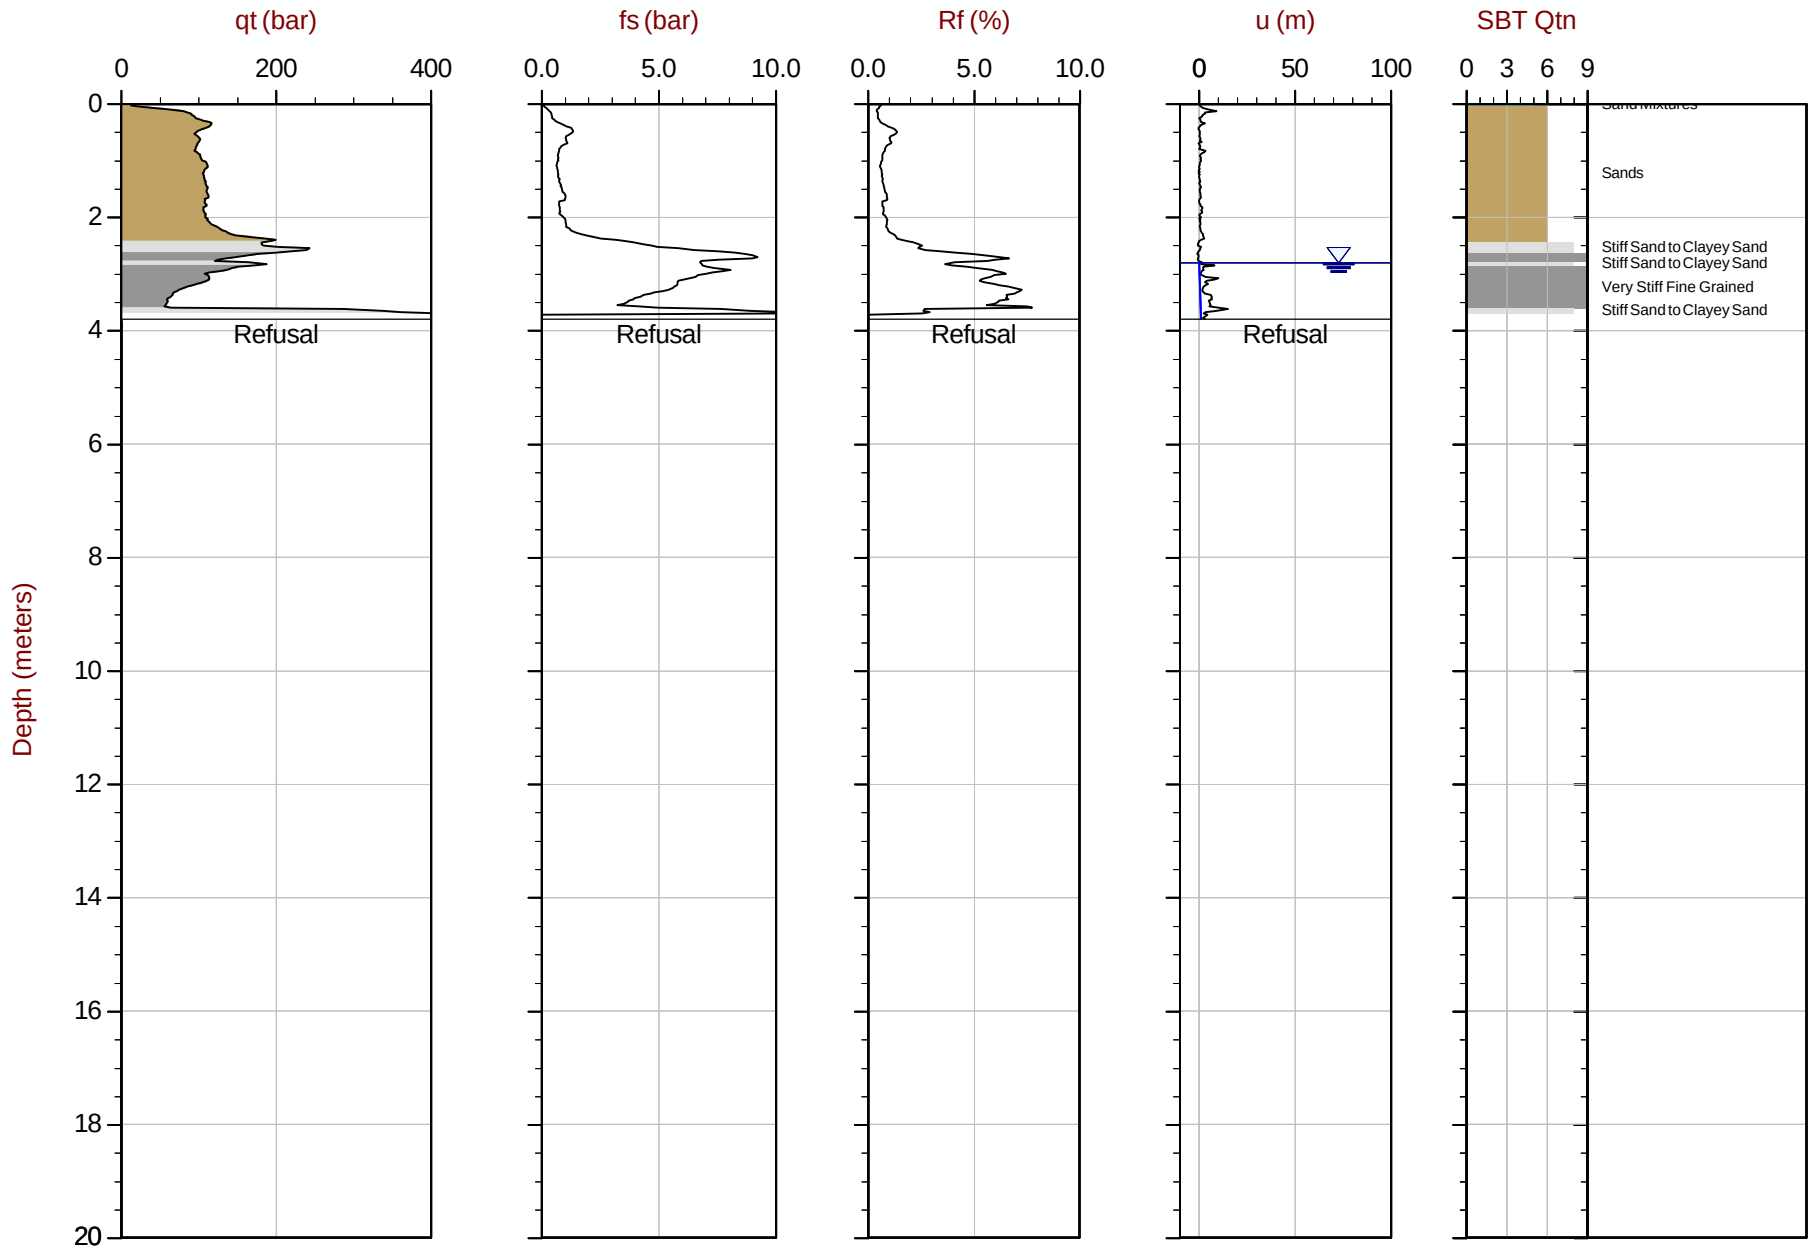

Max Depth: 3.800 m / 12.47 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT129B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612534m E: 415868m Elev: 769.500m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 09:28
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129C
Cone: 822:T1000F10U35 Area= 15cm2

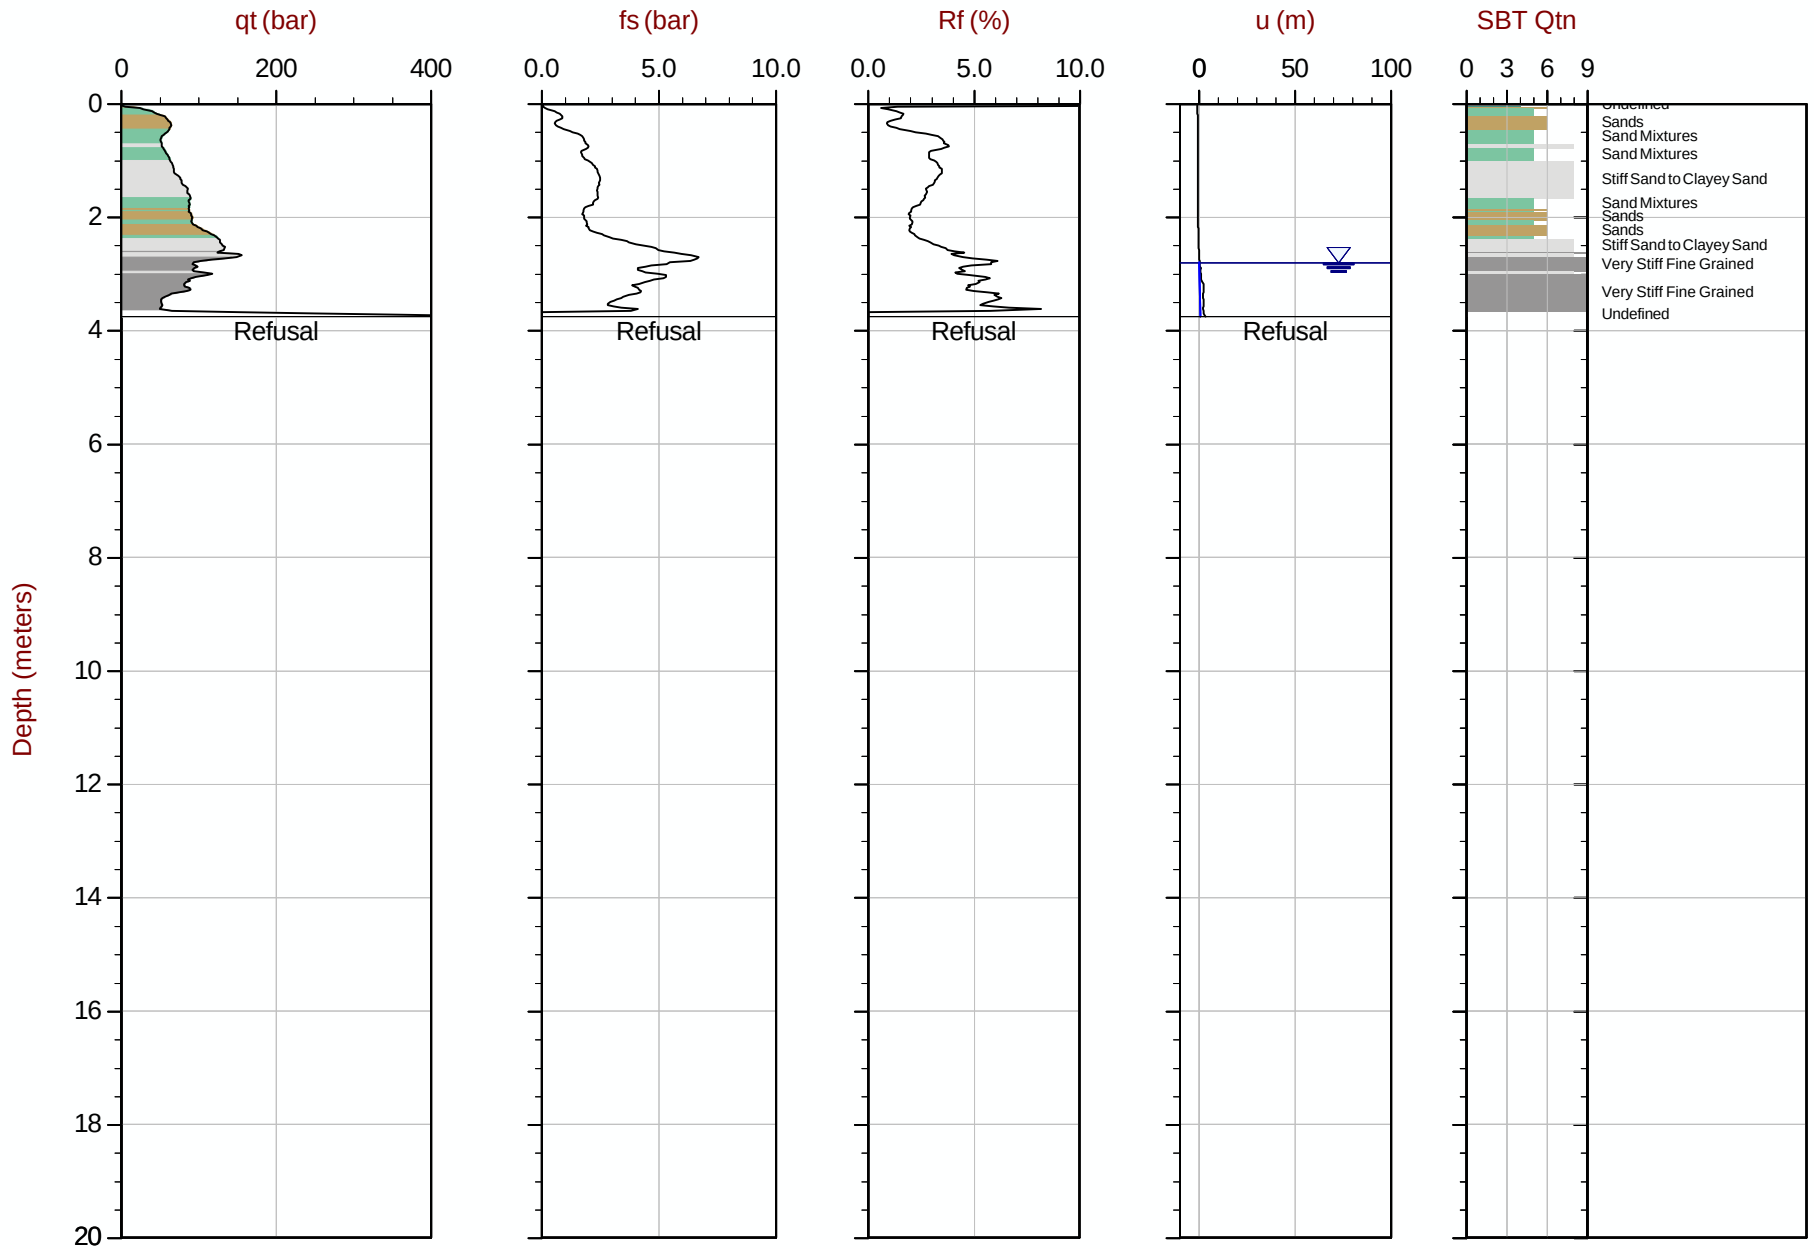

Max Depth: 3.750 m / 12.30 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT129C.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612534m E: 415868m Elev: 769.500m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 16:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT130
Cone: 821:T1000F10U35 Area= 15cm2

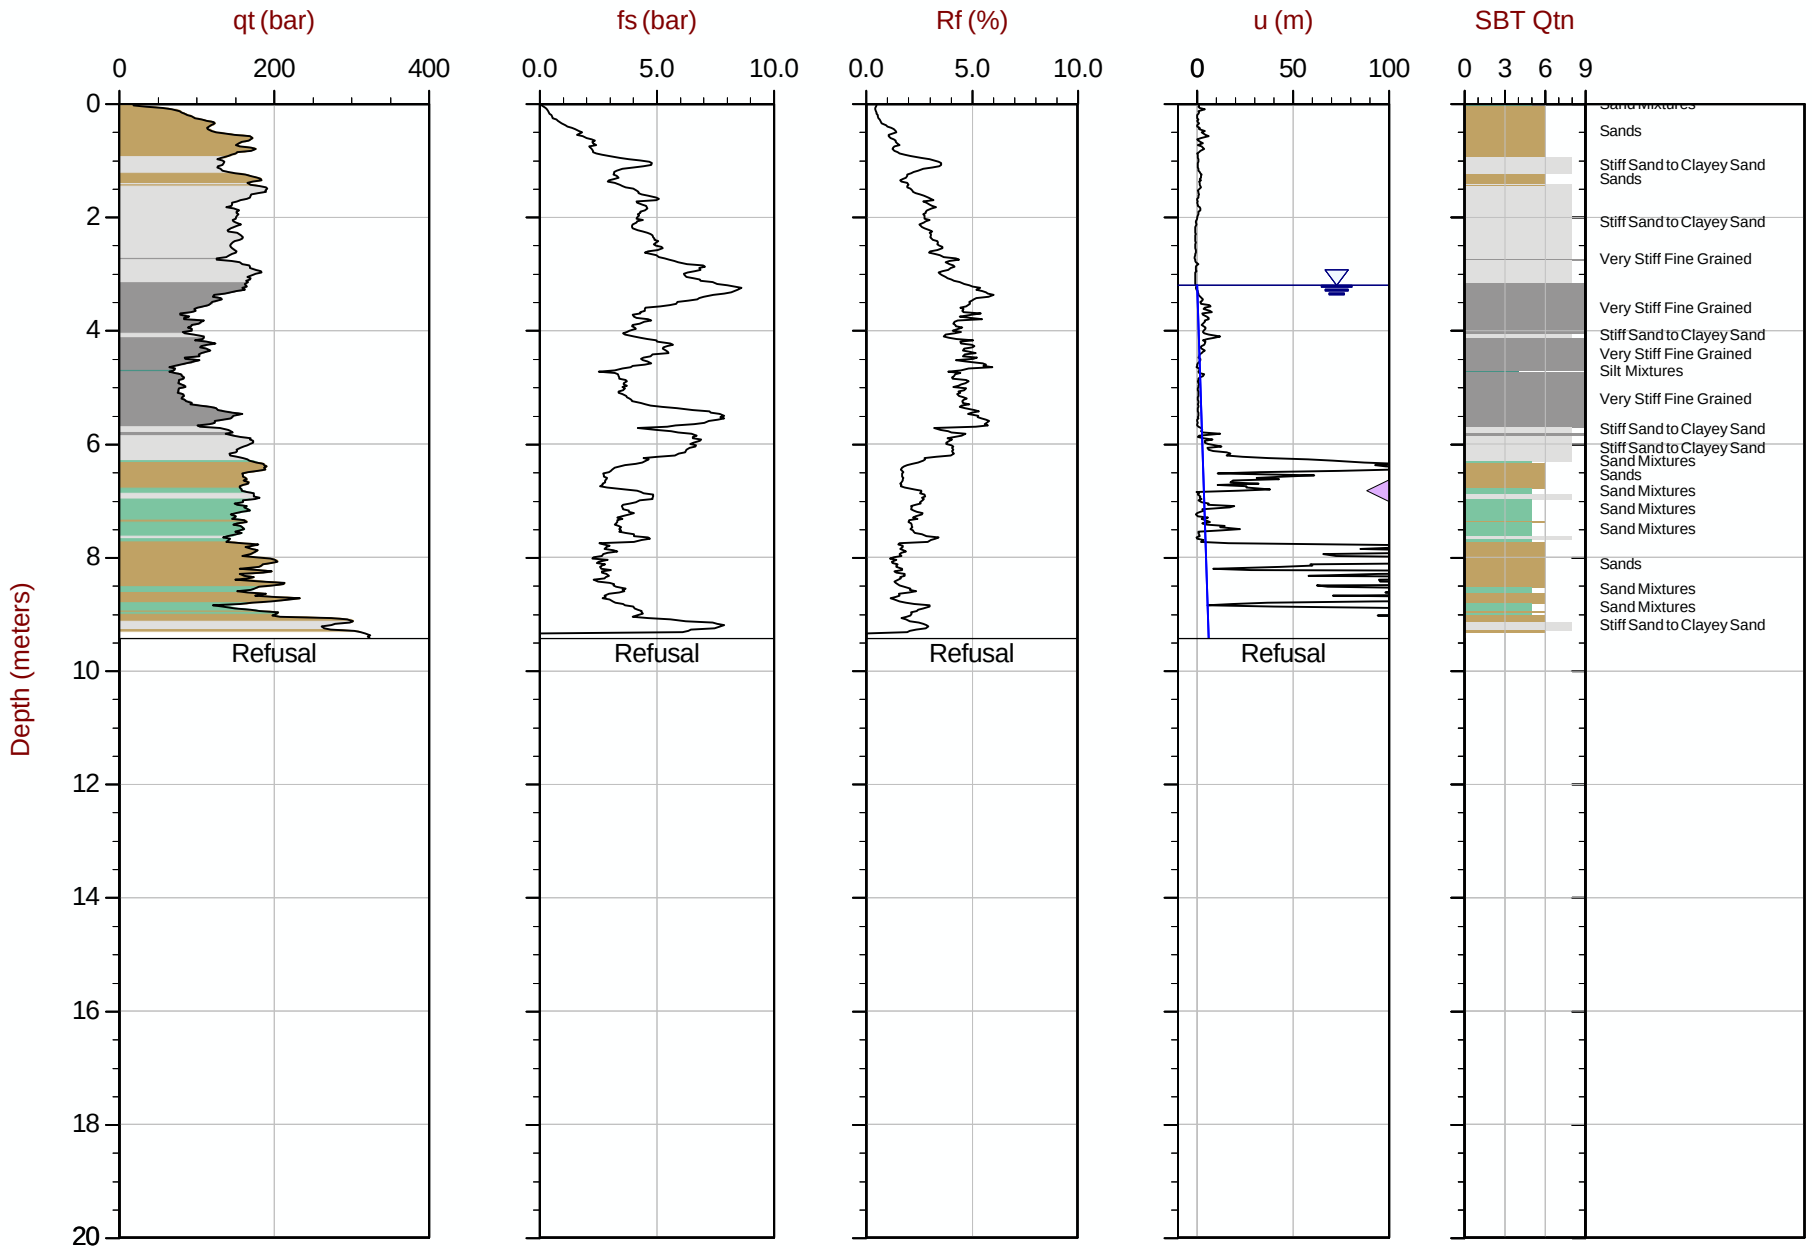

Max Depth: 9.425 m / 30.92 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT130.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612533m E: 415920m Elev: 769.325m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 14:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT131
Cone: 750:T1500F15U35 Area= 15cm2

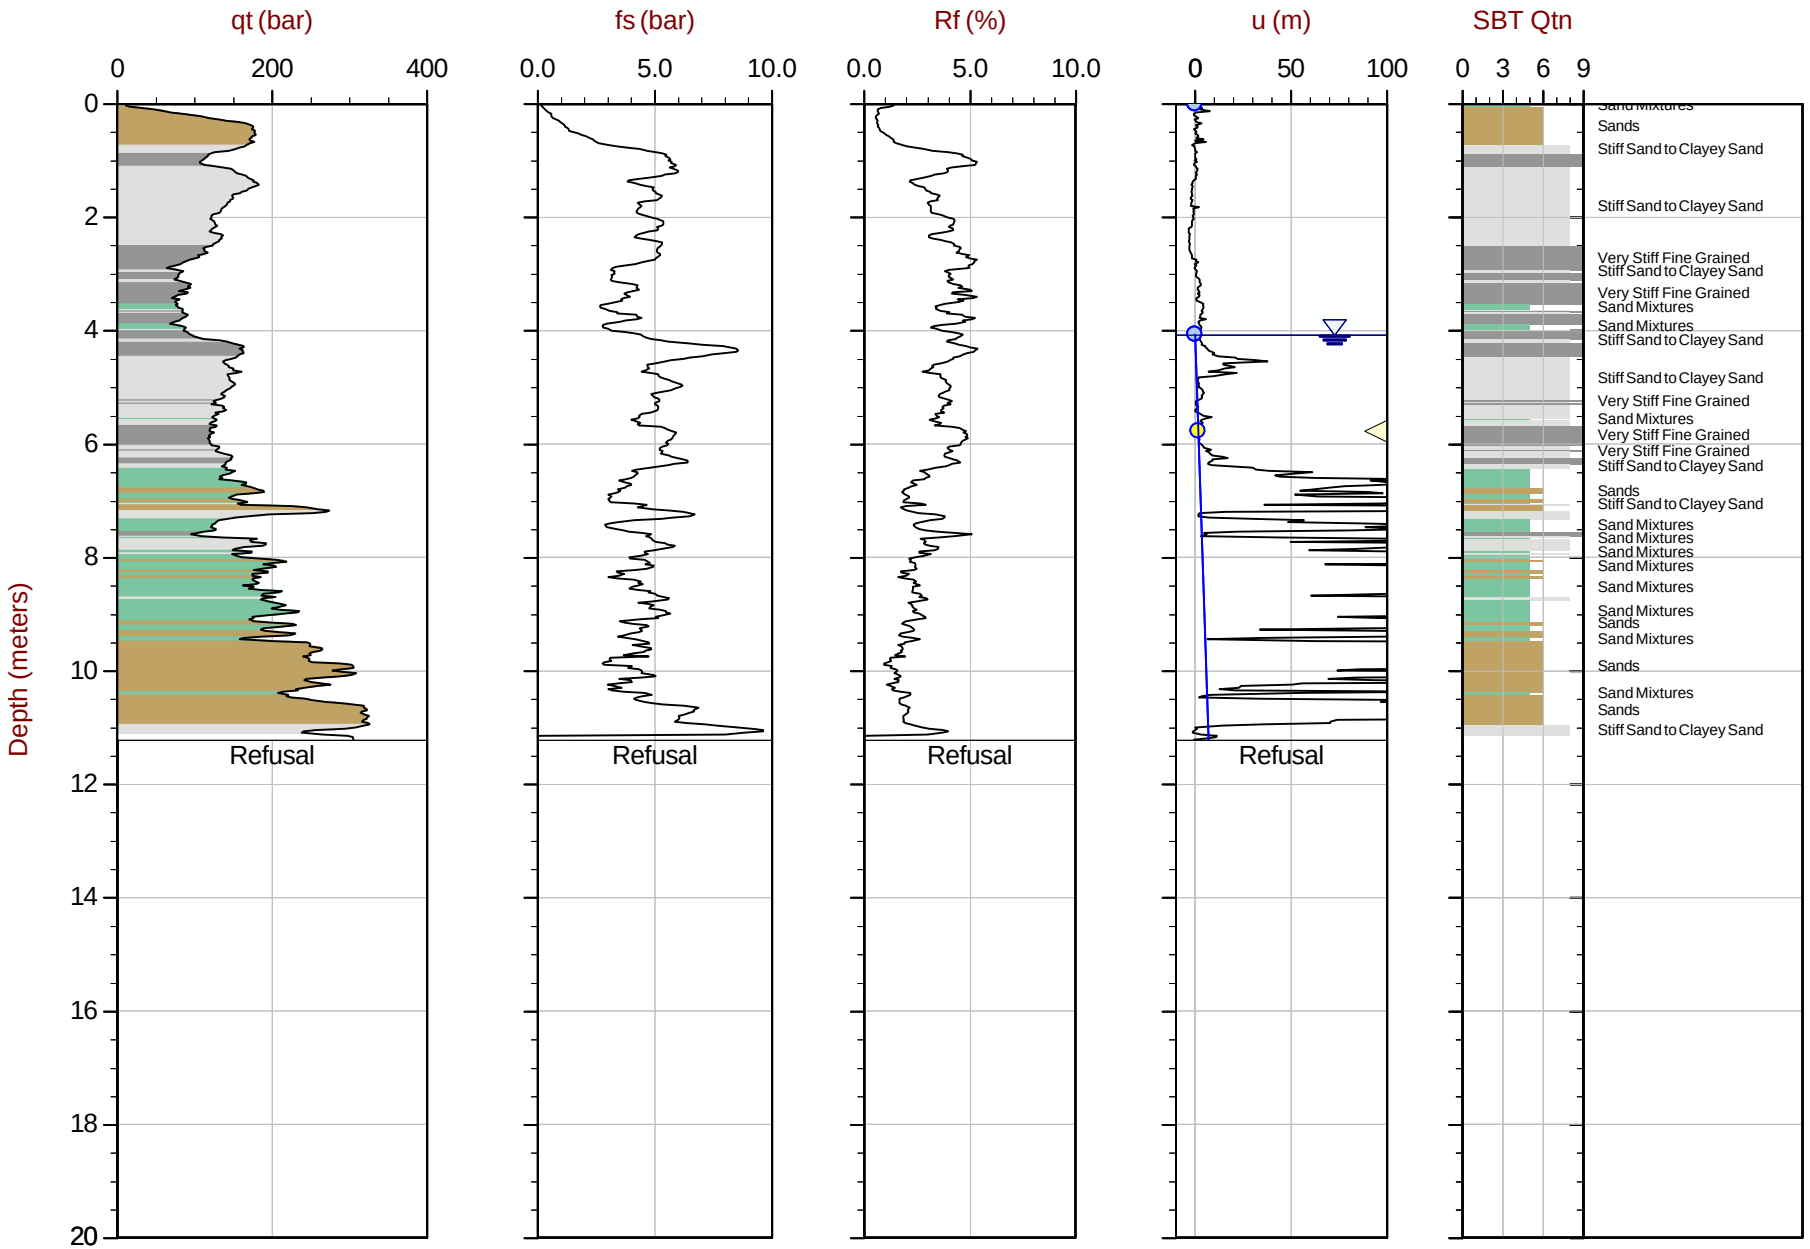

Max Depth: 11.225 m / 36.83 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT131.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612532m E: 415967m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 11:02
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131E
Cone: 822:T1000F10U35 Area= 15cm2

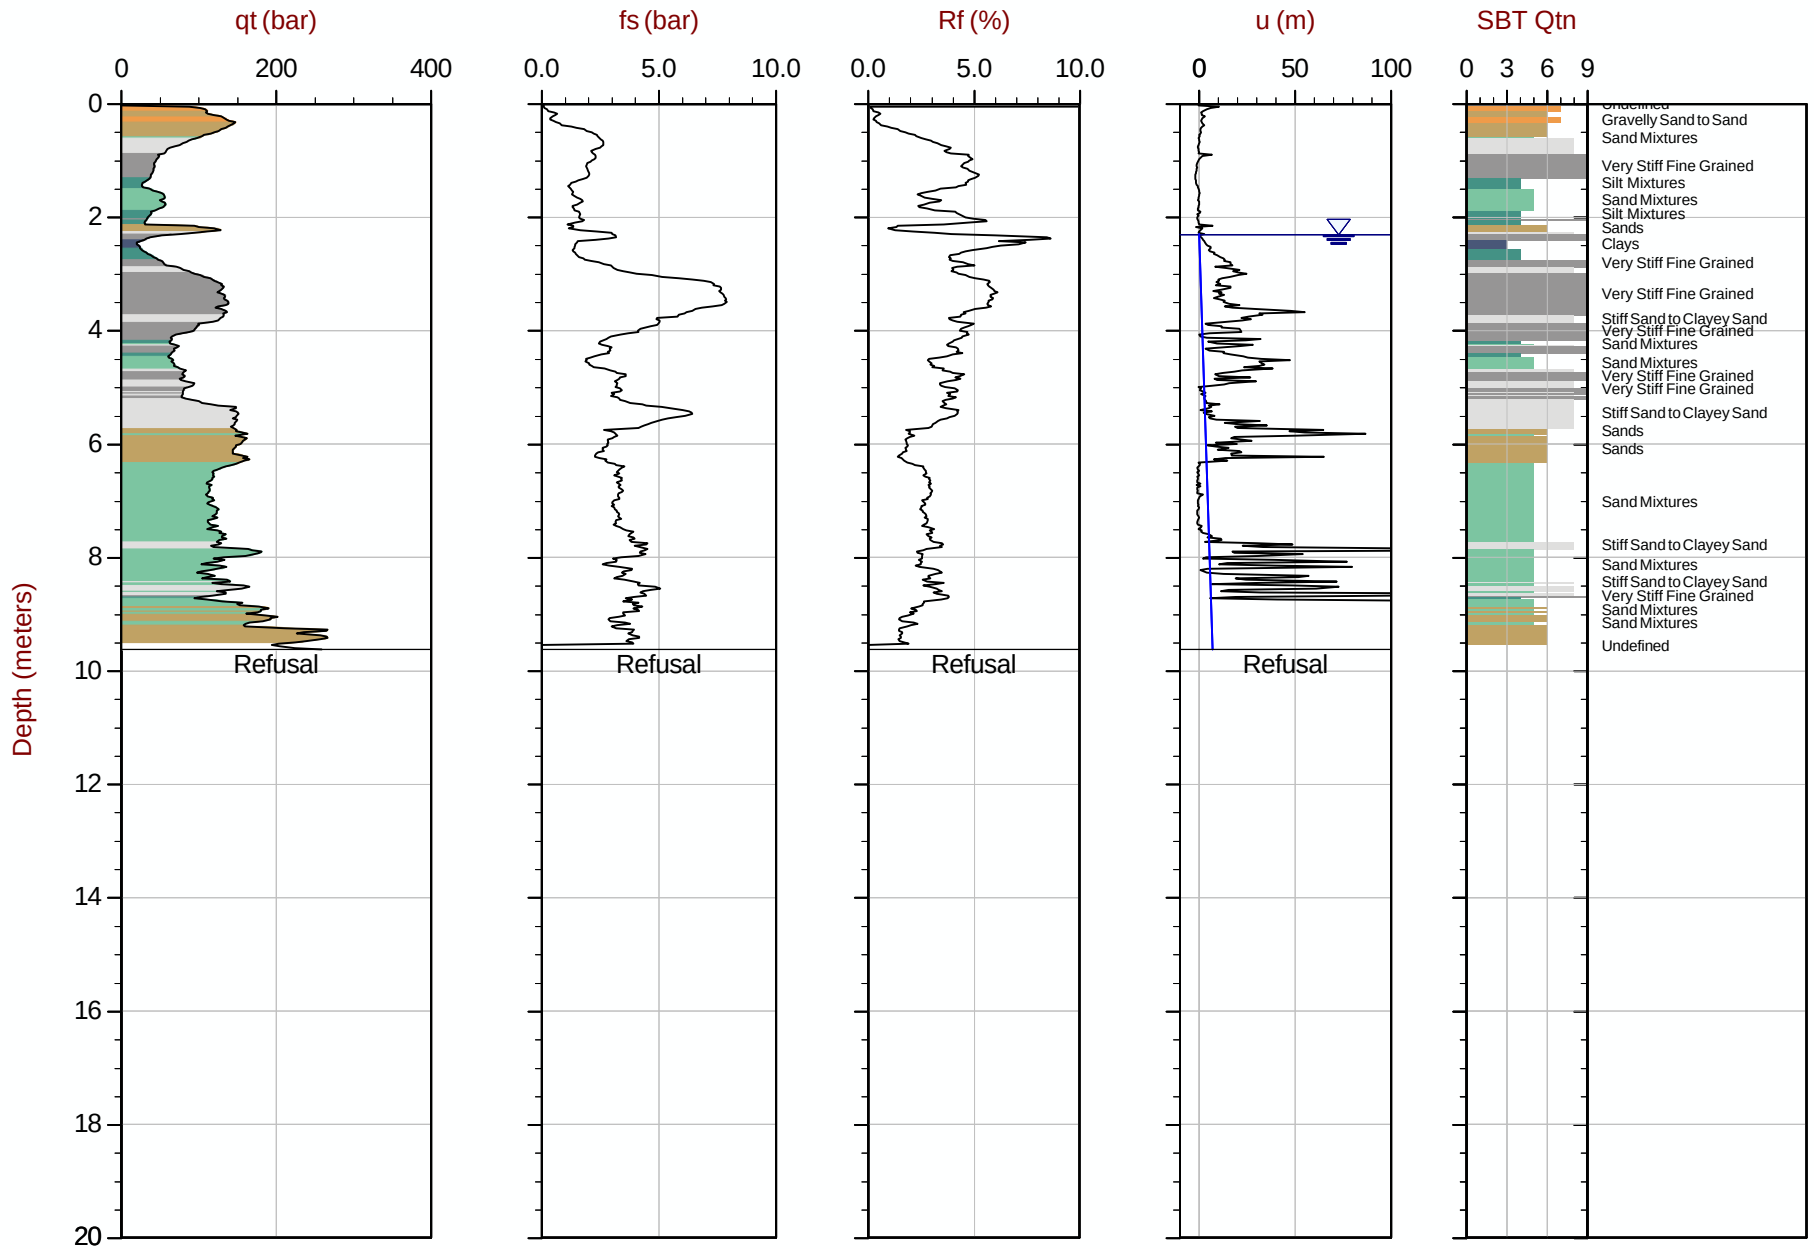

Max Depth: 9.625 m / 31.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131E.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612505m E: 416389m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 09:17
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131N
Cone: 822:T1000F10U35 Area= 15cm2

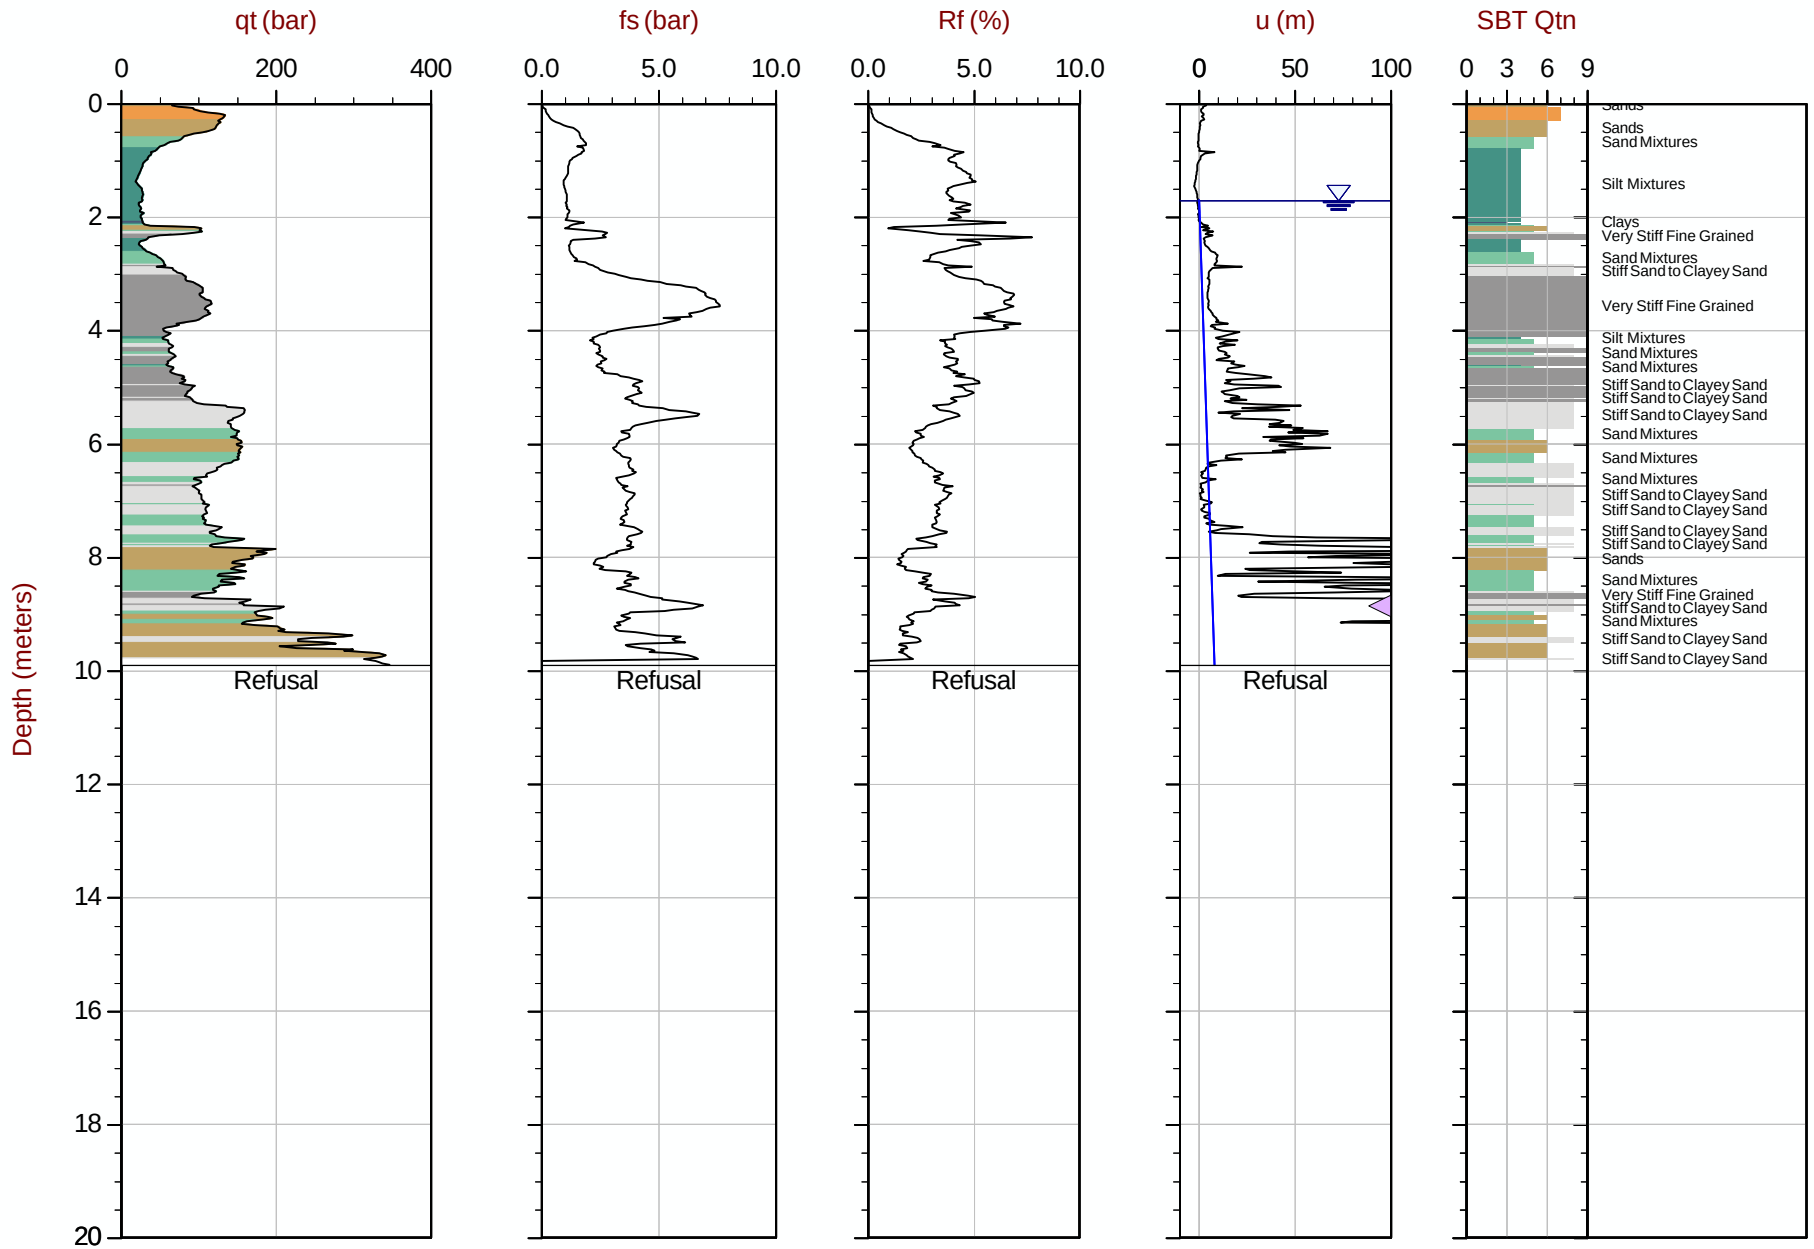

Max Depth: 9.900 m / 32.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131N.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612506m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 11:46
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131S1
Cone: 822:T1000F10U35 Area= 15cm2

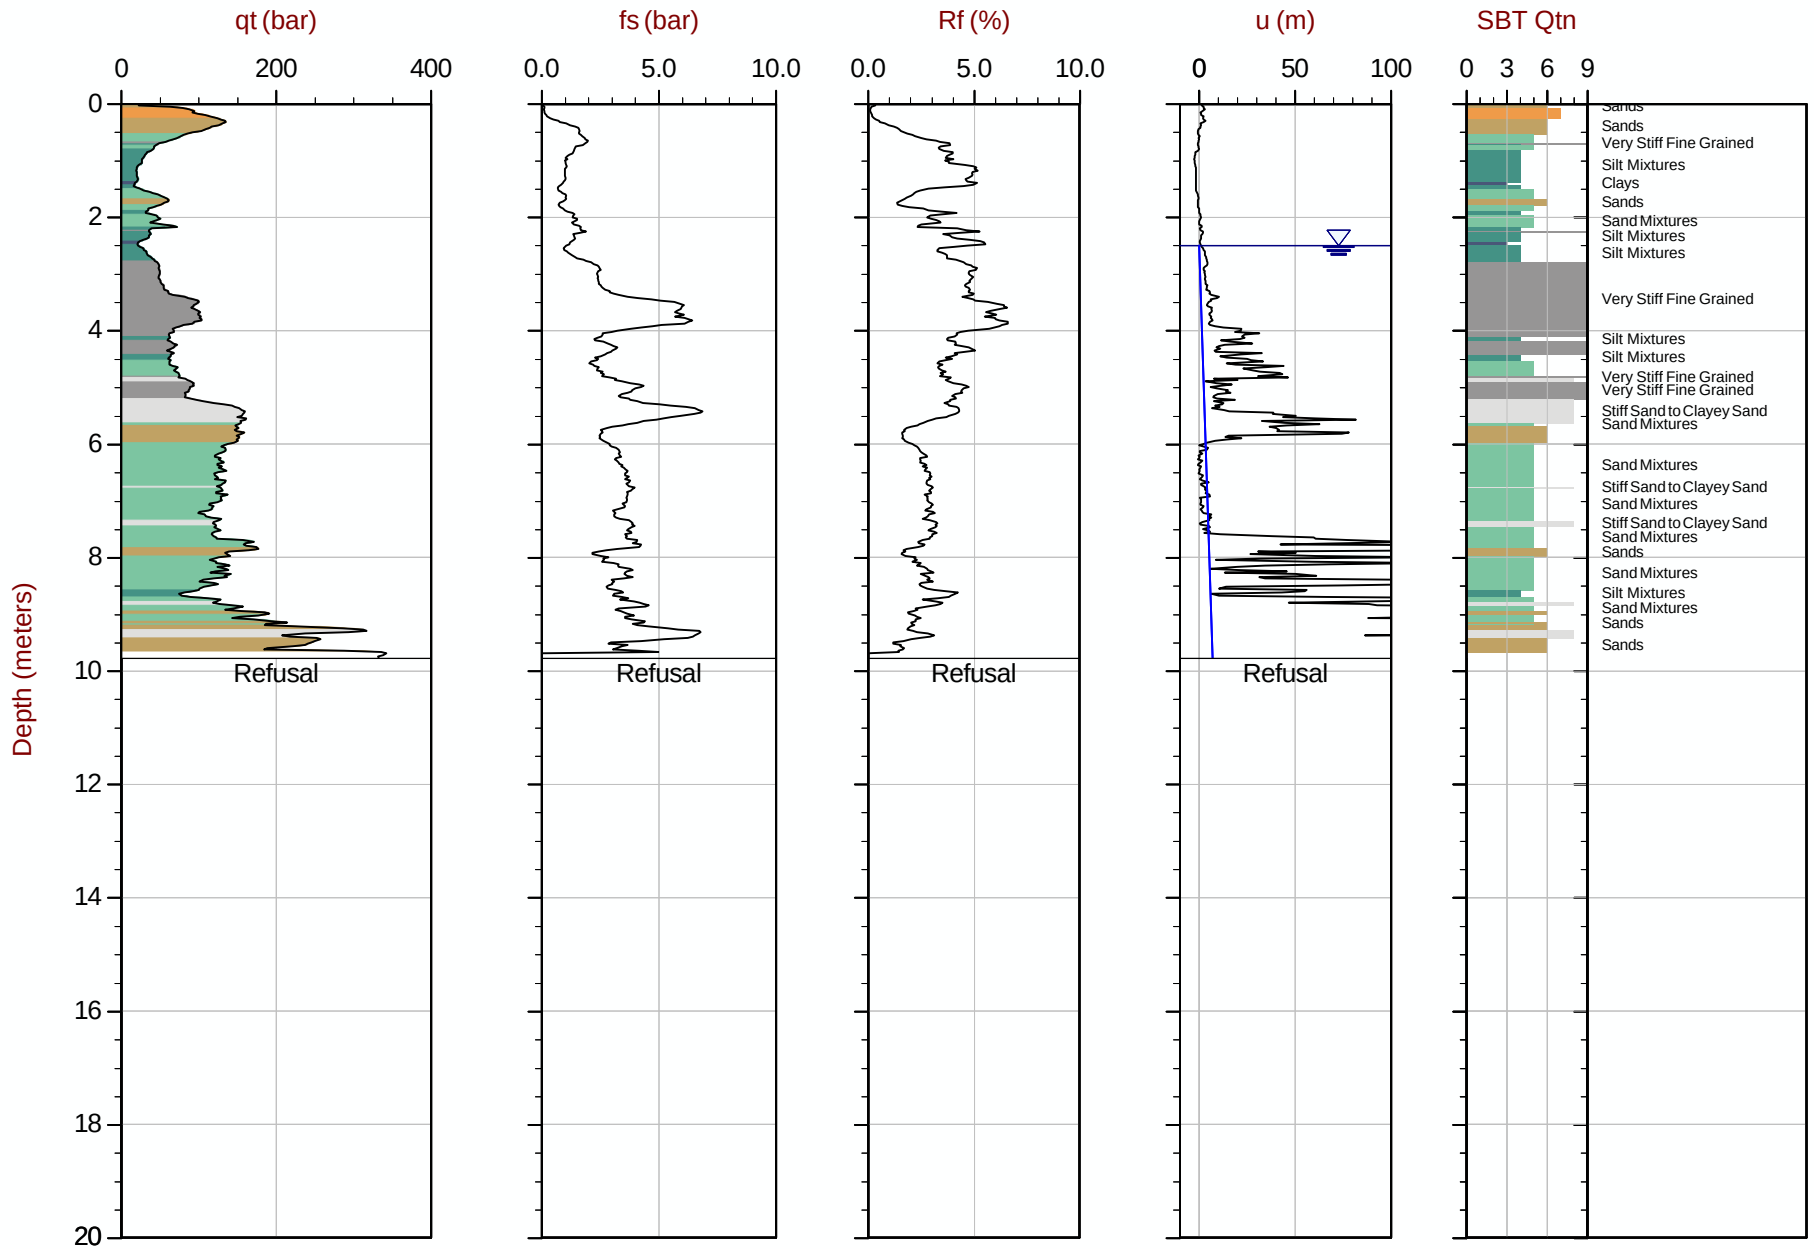

Max Depth: 9.775 m / 32.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131S1.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612504m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 10:23
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131S2
Cone: 822:T1000F10U35 Area= 15cm2

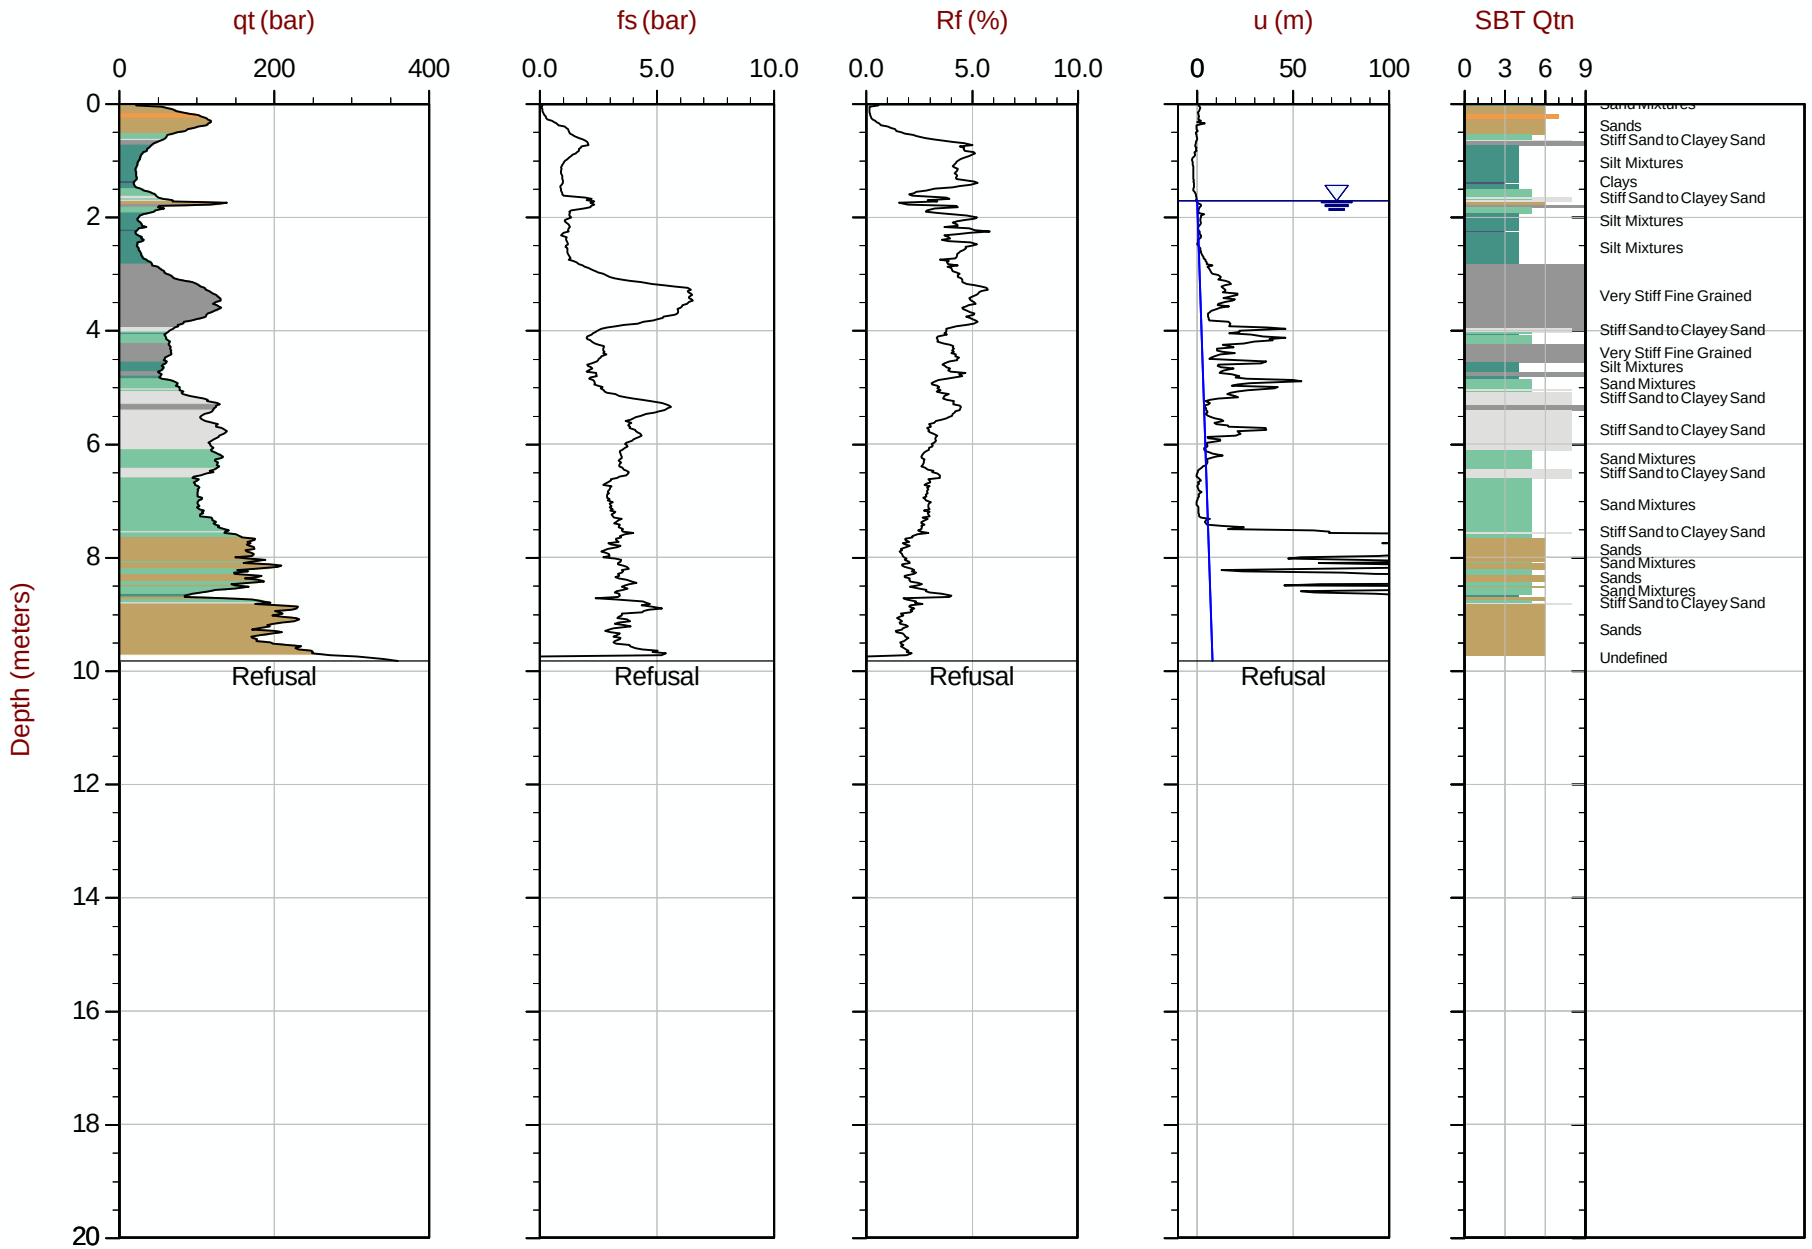

Max Depth: 9.825 m / 32.23 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131S2.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612500m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 16:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT132
Cone: 750:T1500F15U35 Area= 15cm2

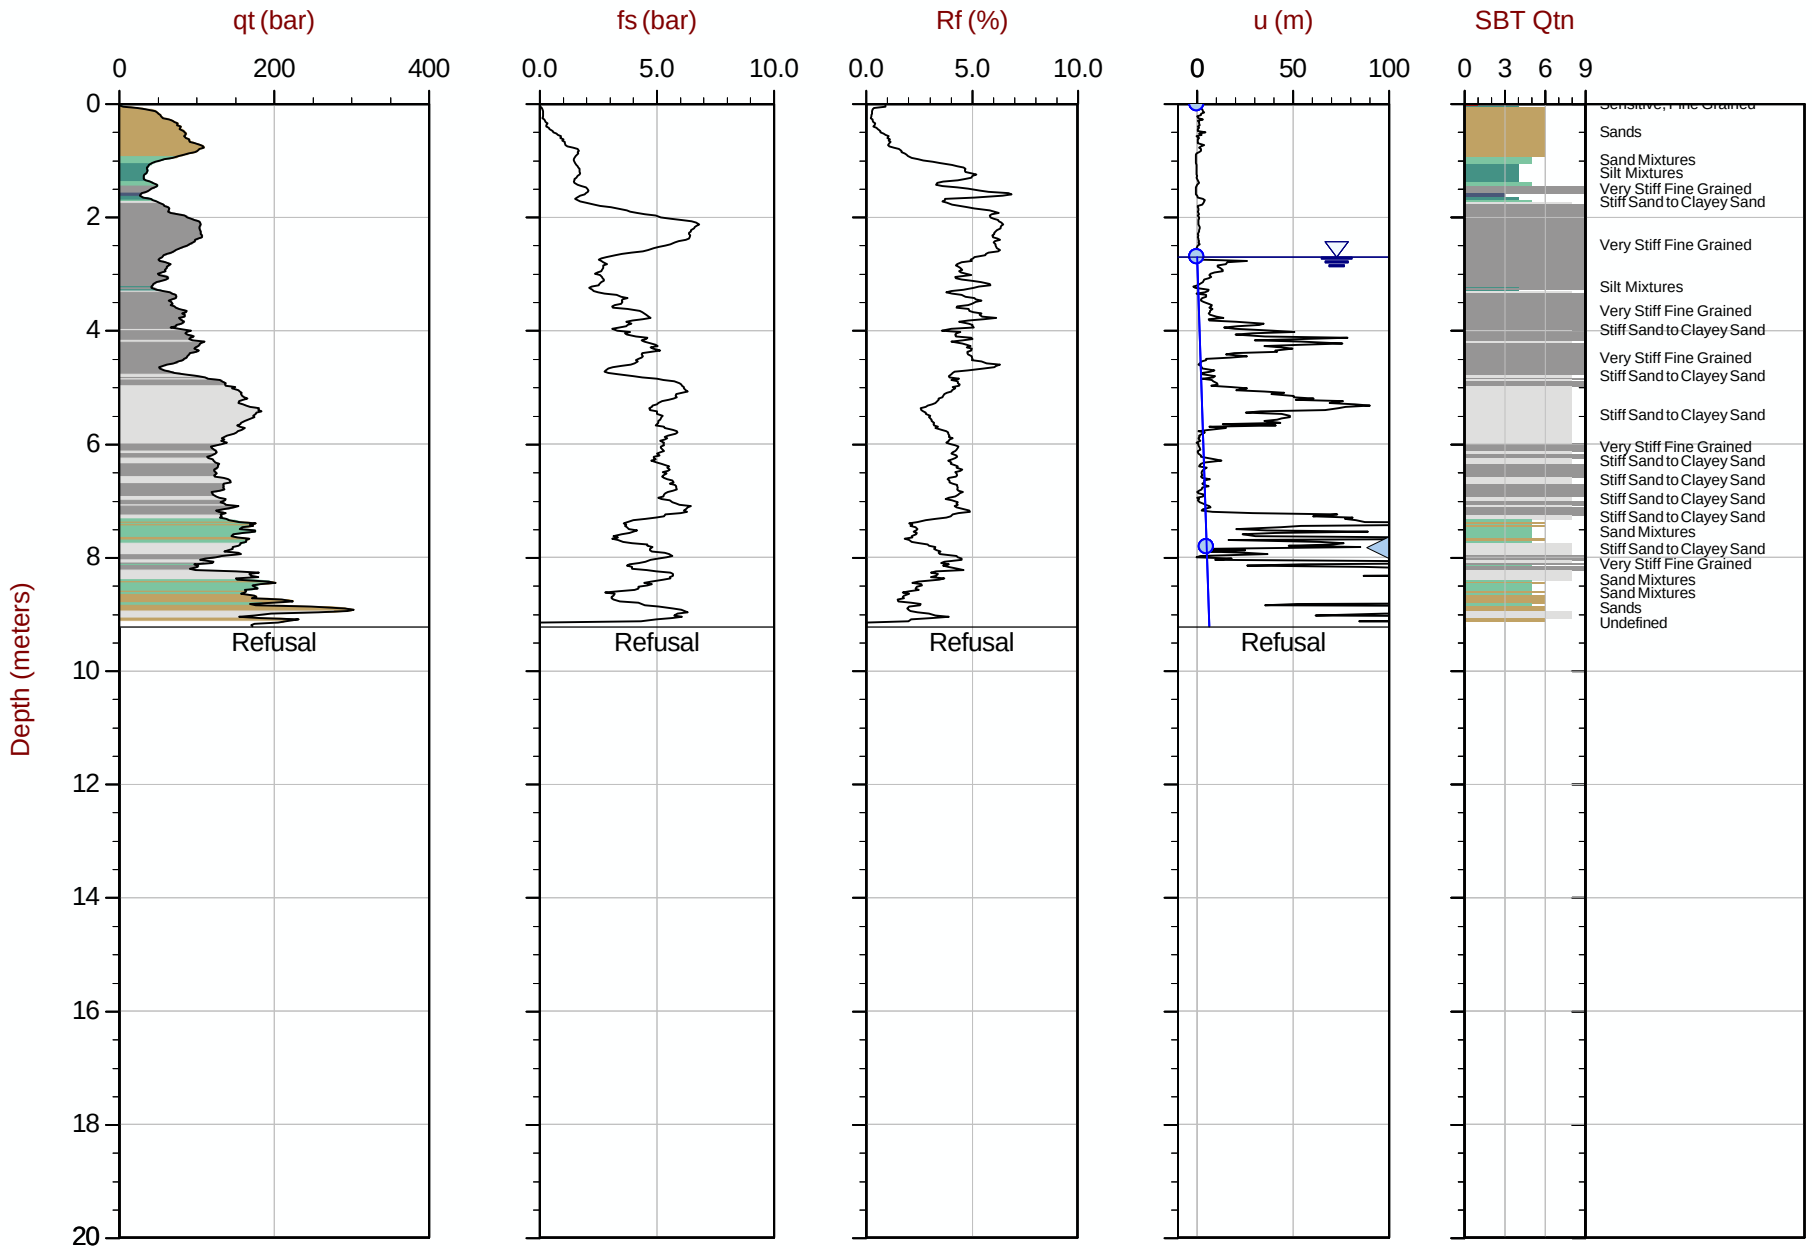

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT132.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612531m E: 416020m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 07:06
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT133
Cone: 750:T1500F15U35 Area= 15cm2

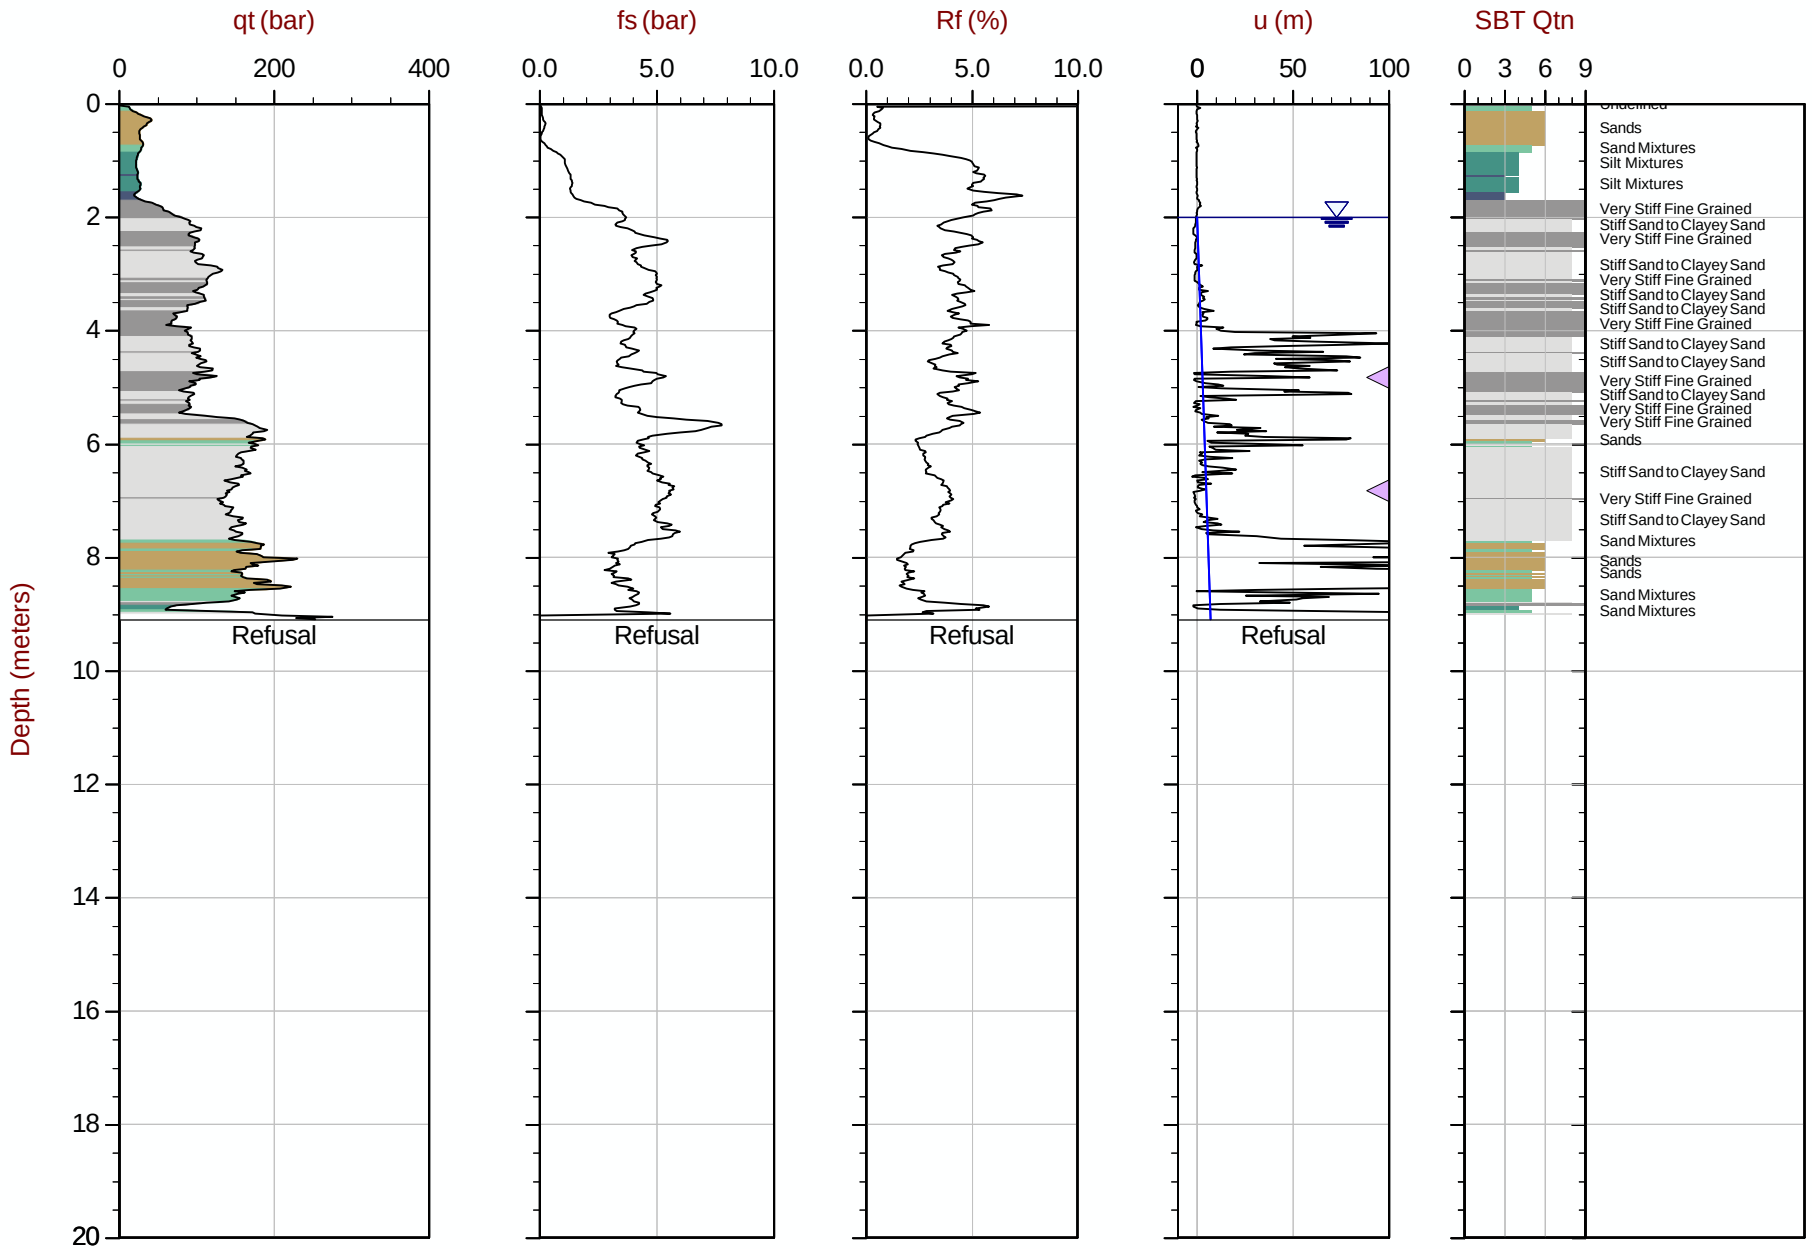

Max Depth: 9.100 m / 29.86 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT133.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612530m E: 416070m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 08:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT134
Cone: 750:T1500F15U35 Area= 15cm2

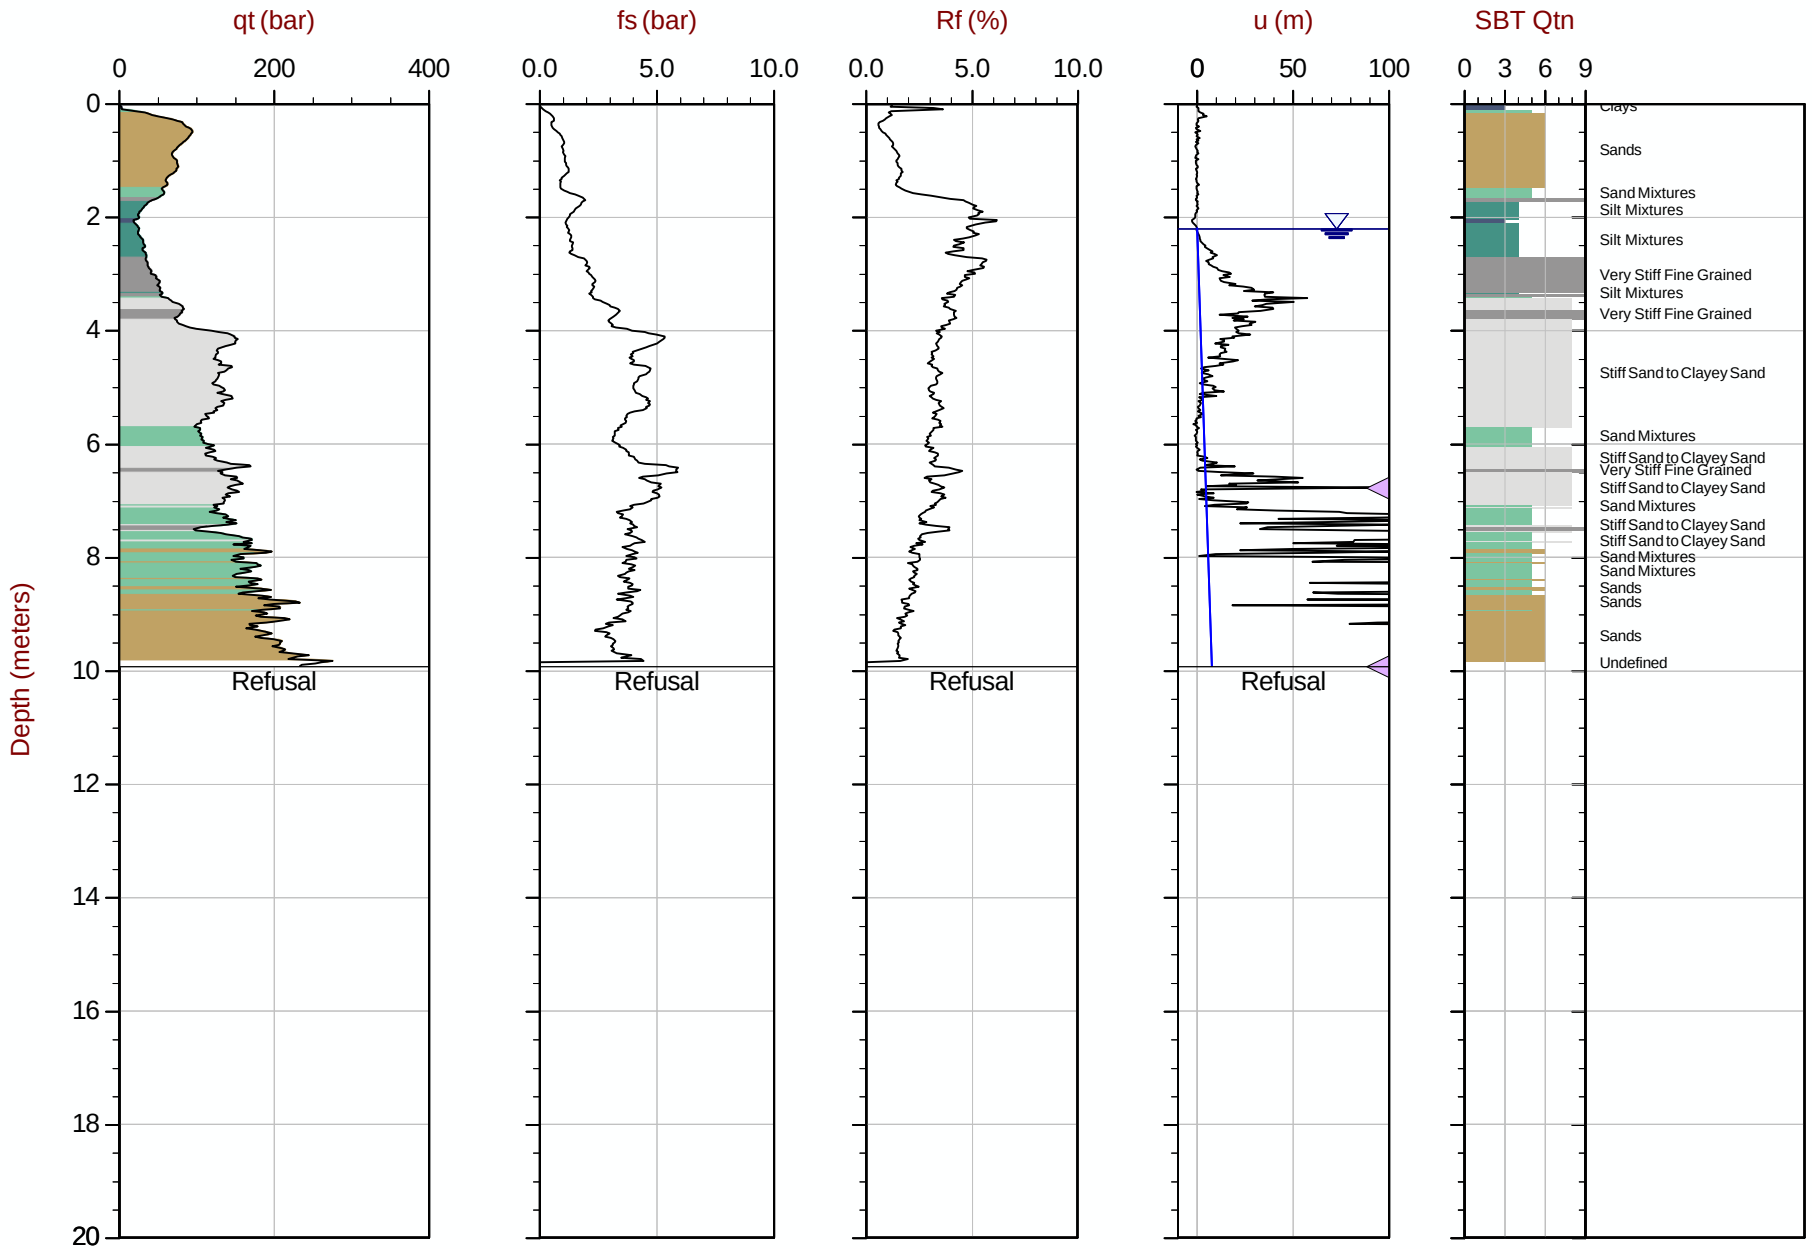

Max Depth: 9.925 m / 32.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT134.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612529m E: 416120m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 10:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT135
Cone: 750:T1500F15U35 Area= 15cm2

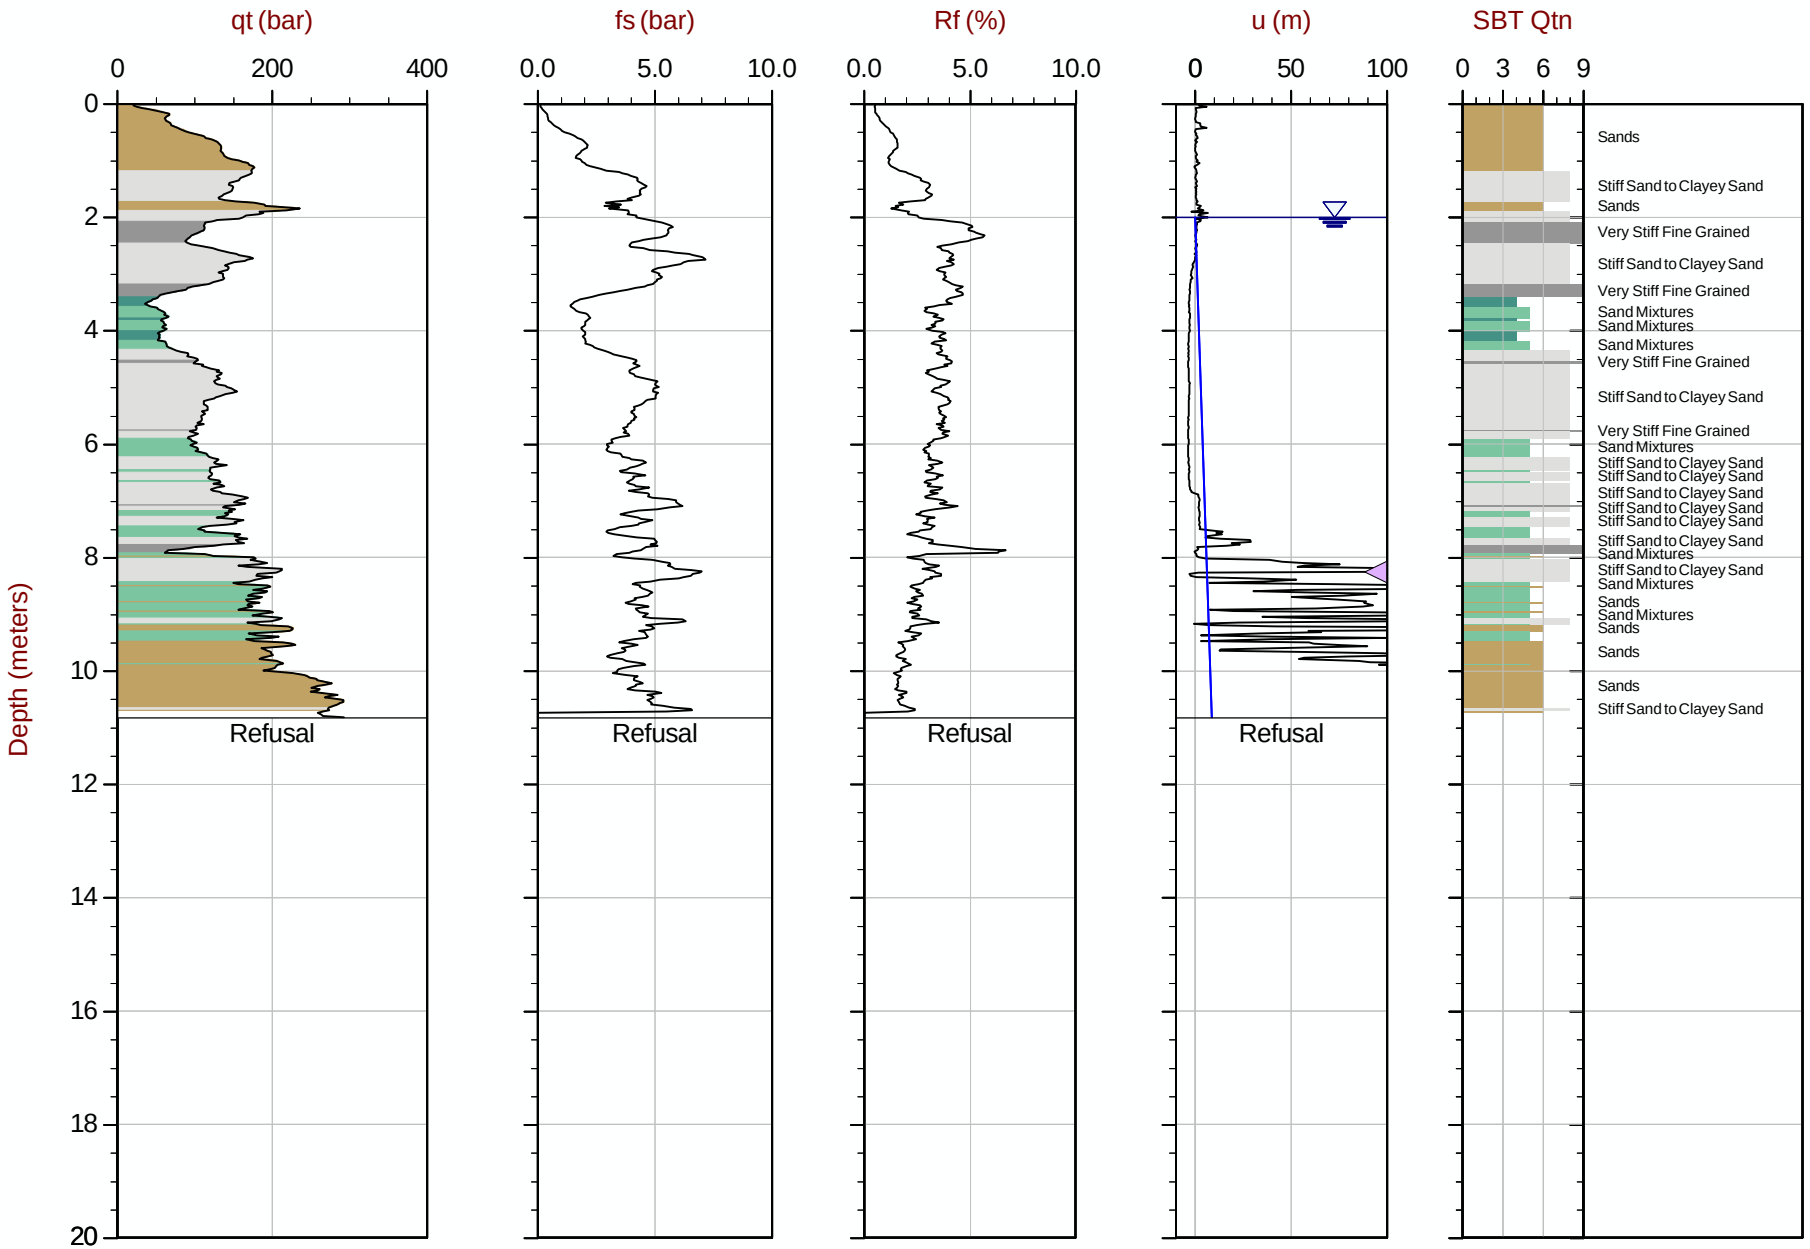

Max Depth: 10.825 m / 35.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT135.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612528m E: 416170m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 11:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT136
Cone: 750:T1500F15U35 Area= 15cm2

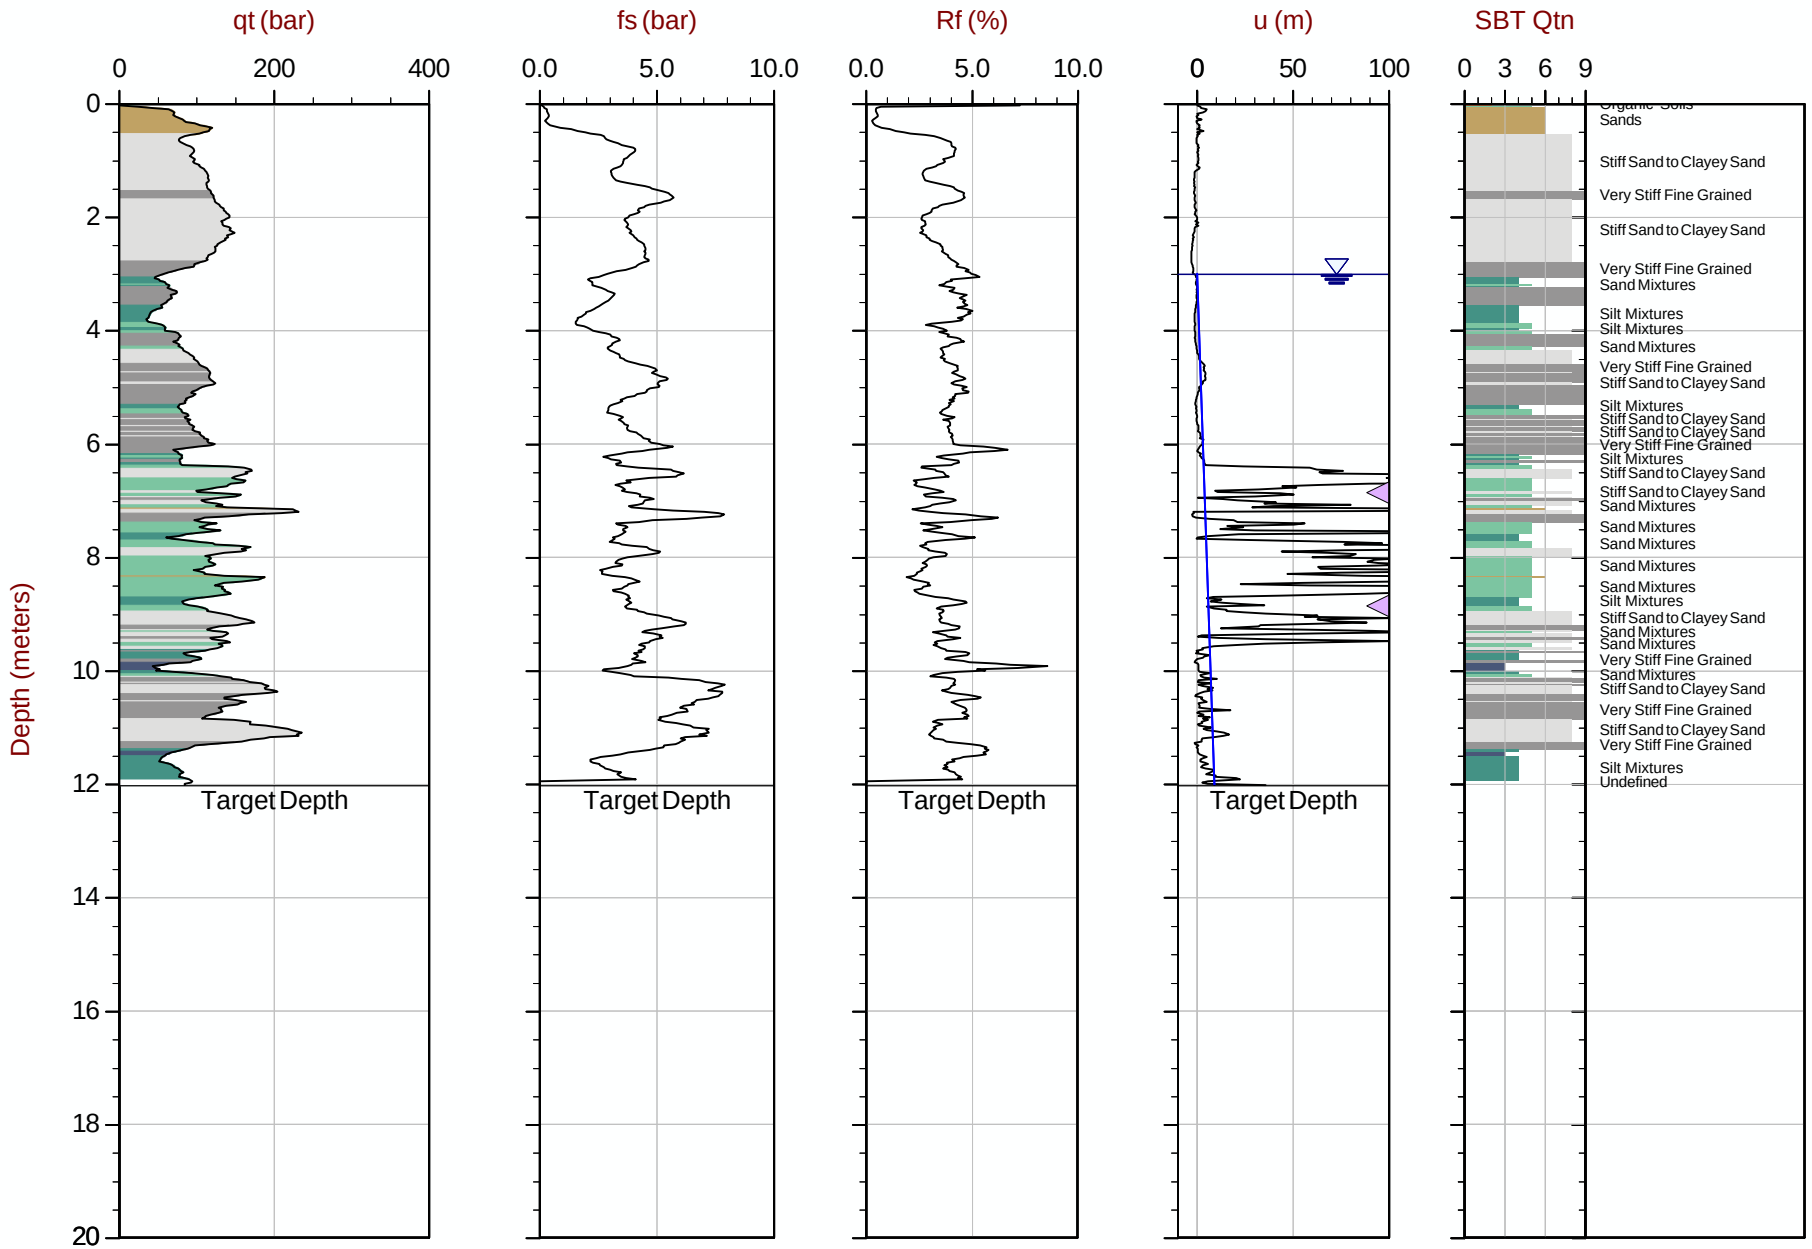

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT136.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612526m E: 416220m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 12:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT137
Cone: 750:T1500F15U35 Area= 15cm2

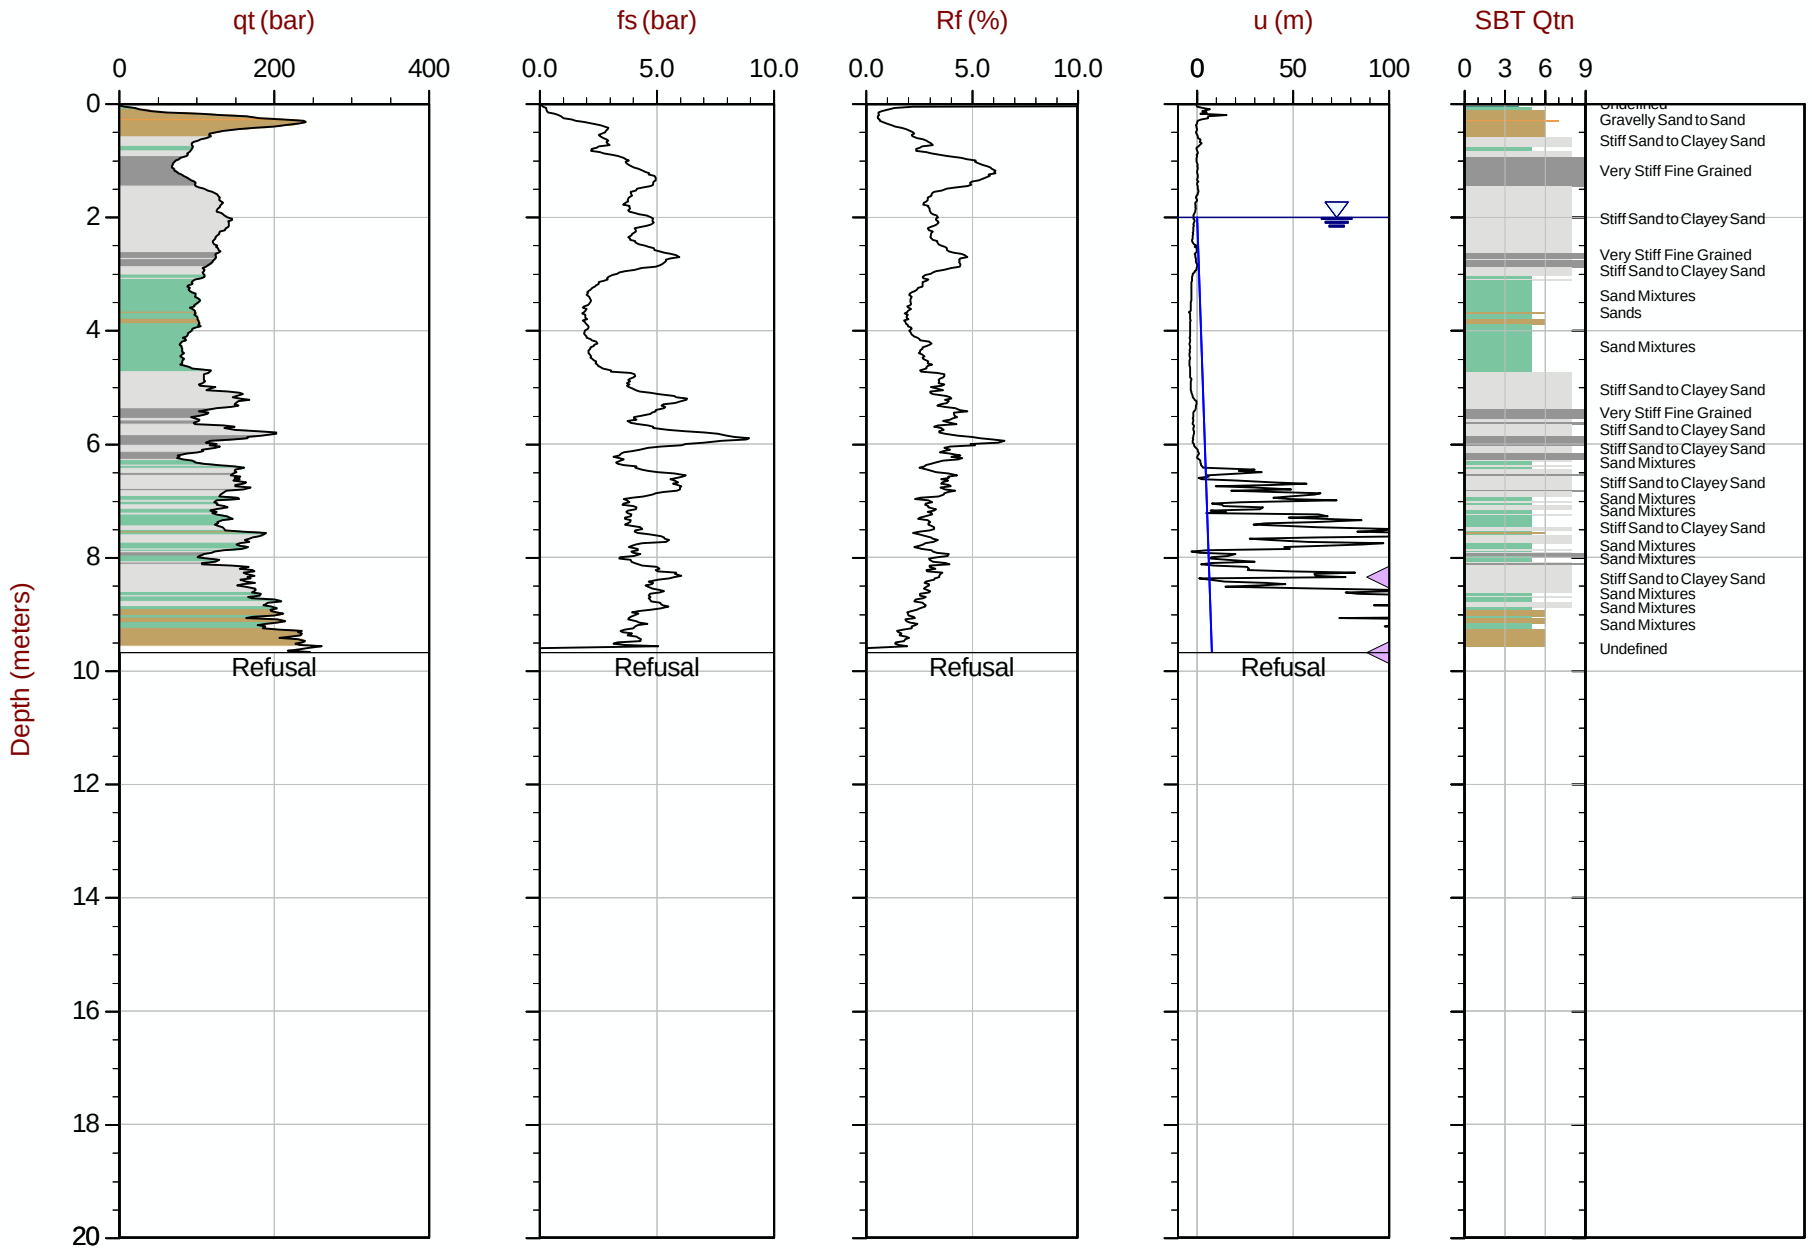

Max Depth: 9.675 m / 31.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT137.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612525m E: 416270m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 14:22
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT138
Cone: 854:T1500F15U35 Area= 15cm2

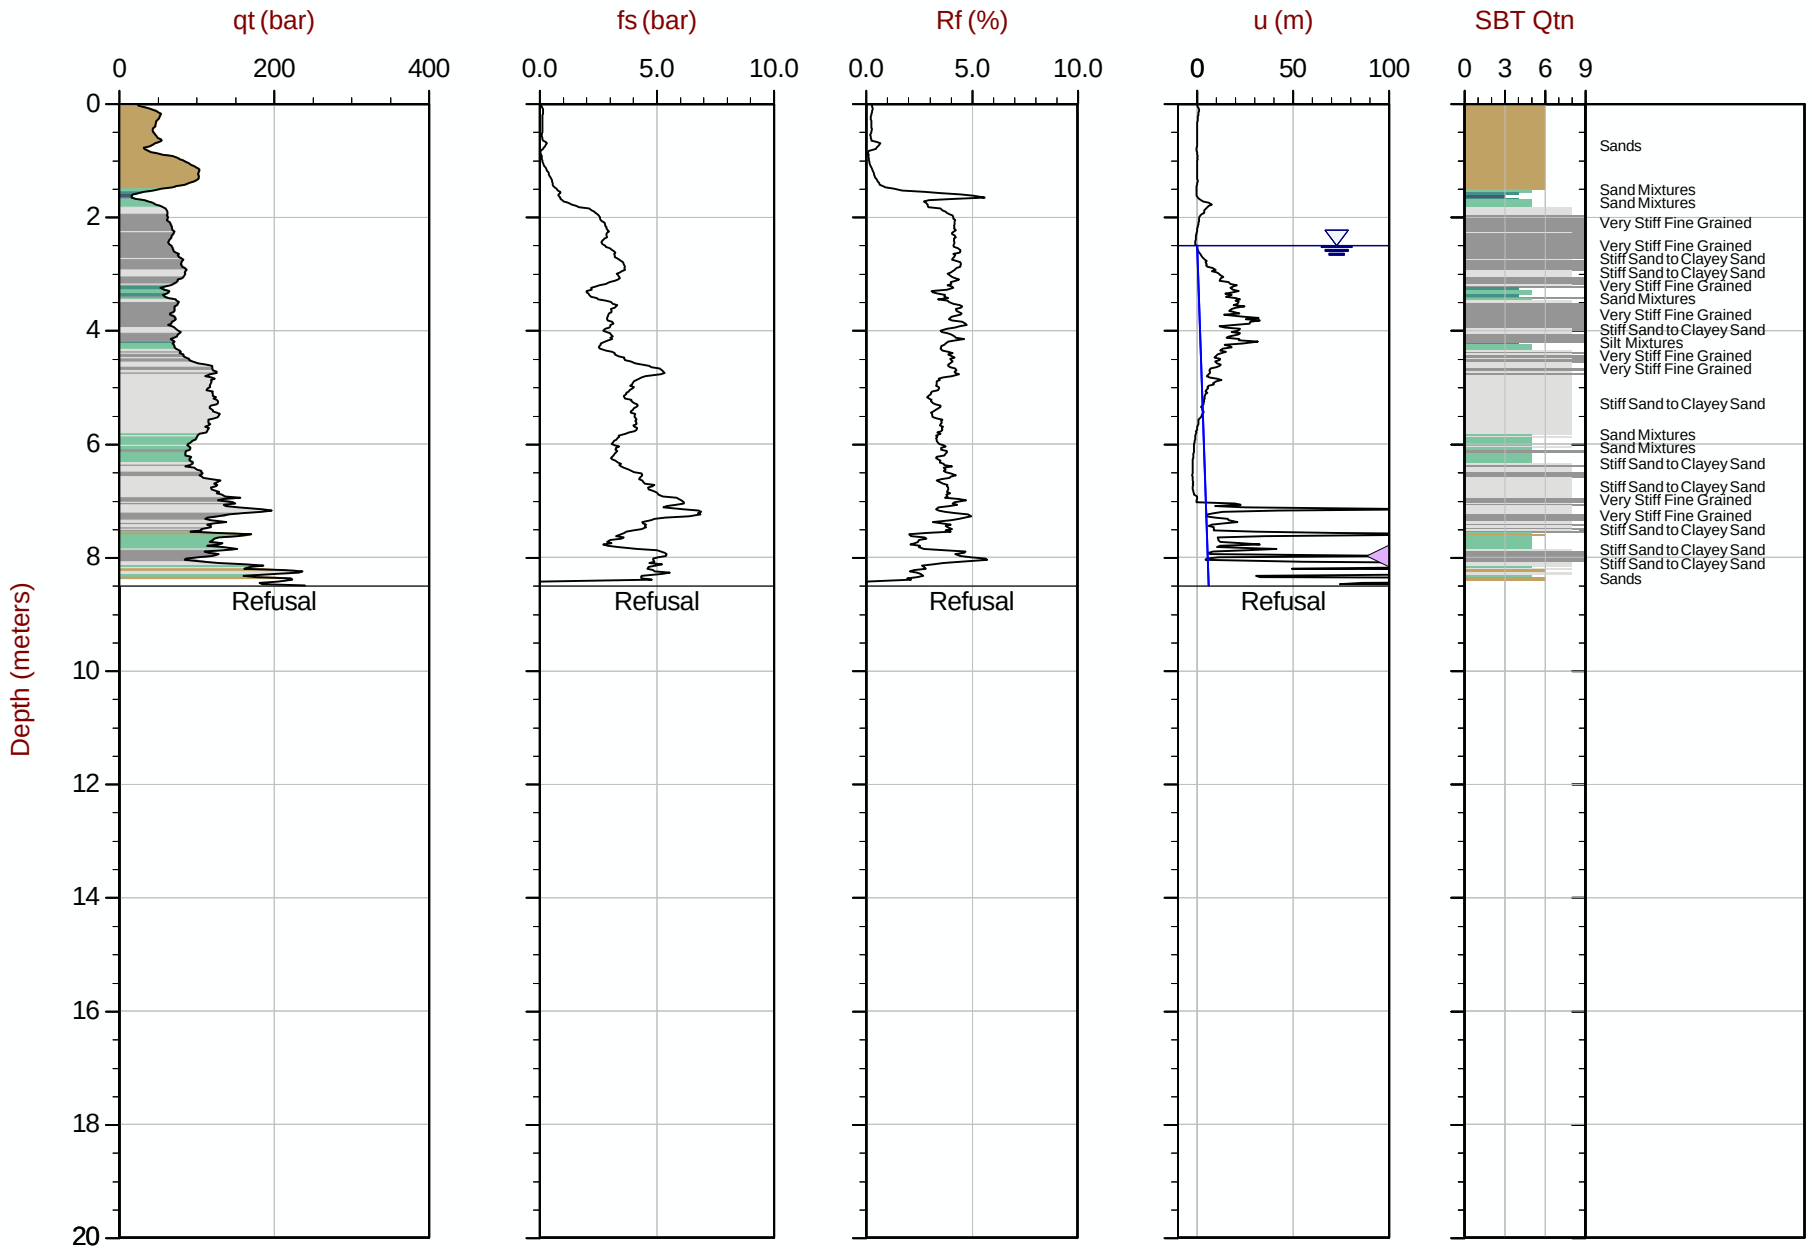

Max Depth: 8.500 m / 27.89 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT138.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612524m E: 416320m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 15:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT139
Cone: 854:T1500F15U35 Area= 15cm2

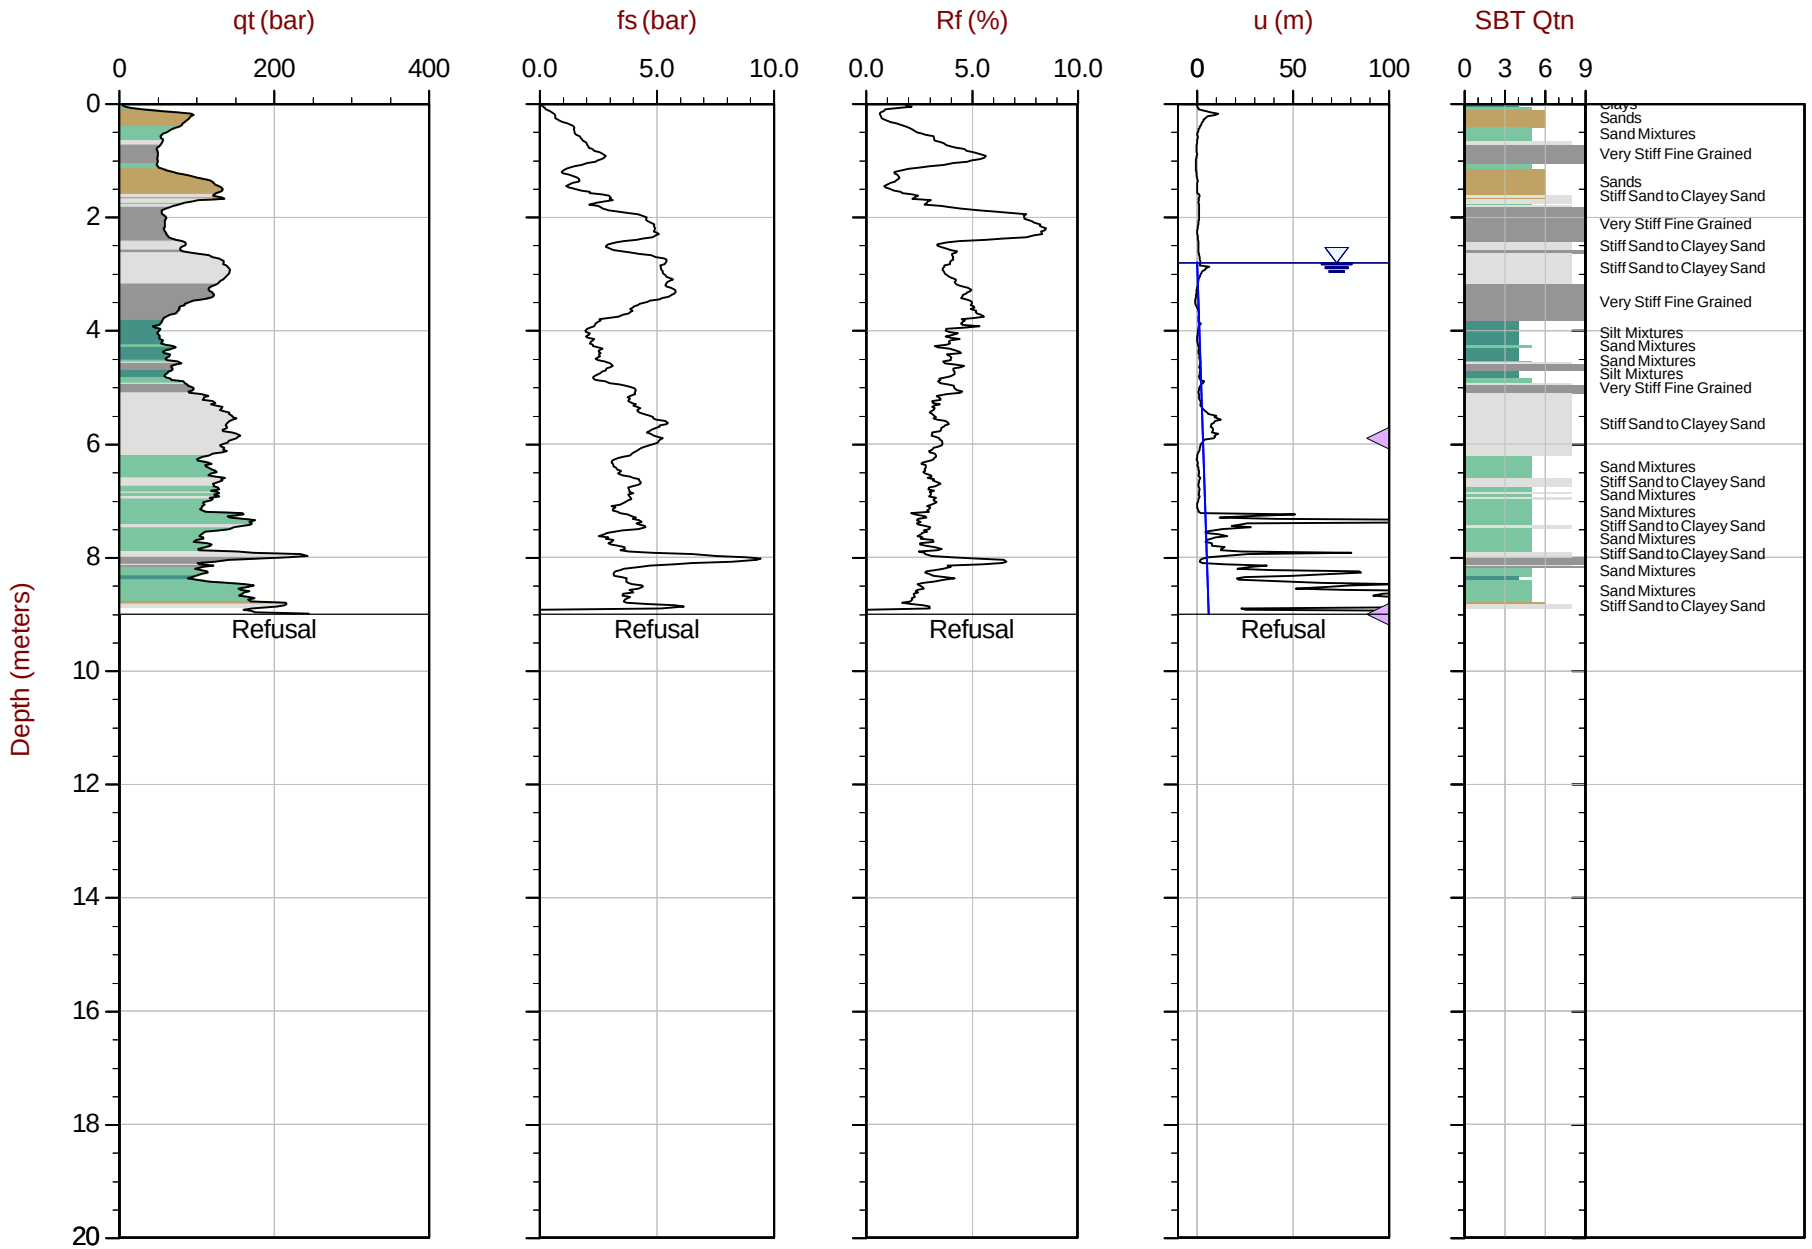

Max Depth: 9.000 m / 29.53 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT139.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612523m E: 416370m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 16:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT140
Cone: 854:T1500F15U35 Area= 15cm2

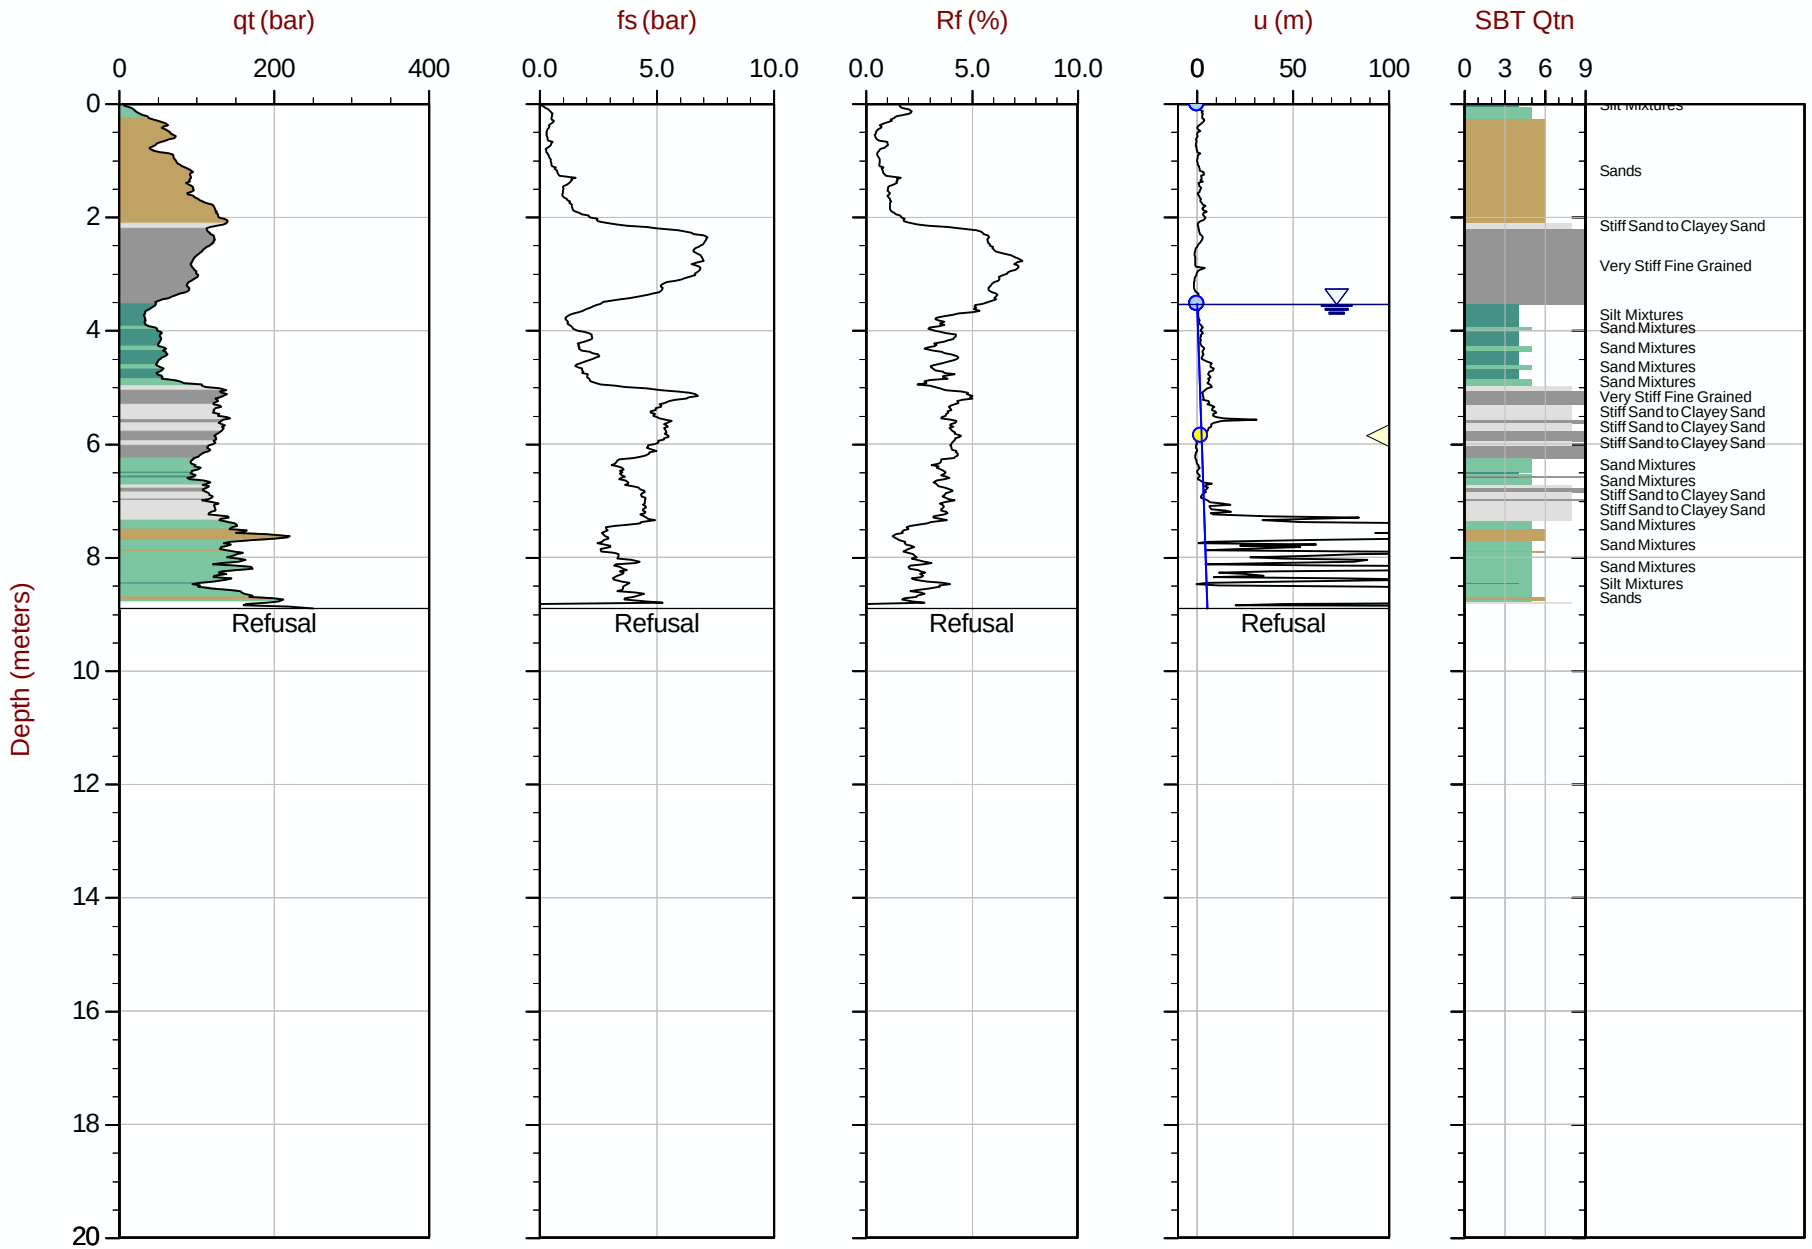

Max Depth: 8.900 m / 29.20 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT140.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612522m E: 416419m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 07:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT141
Cone: 854:T1500F15U35 Area= 15cm2

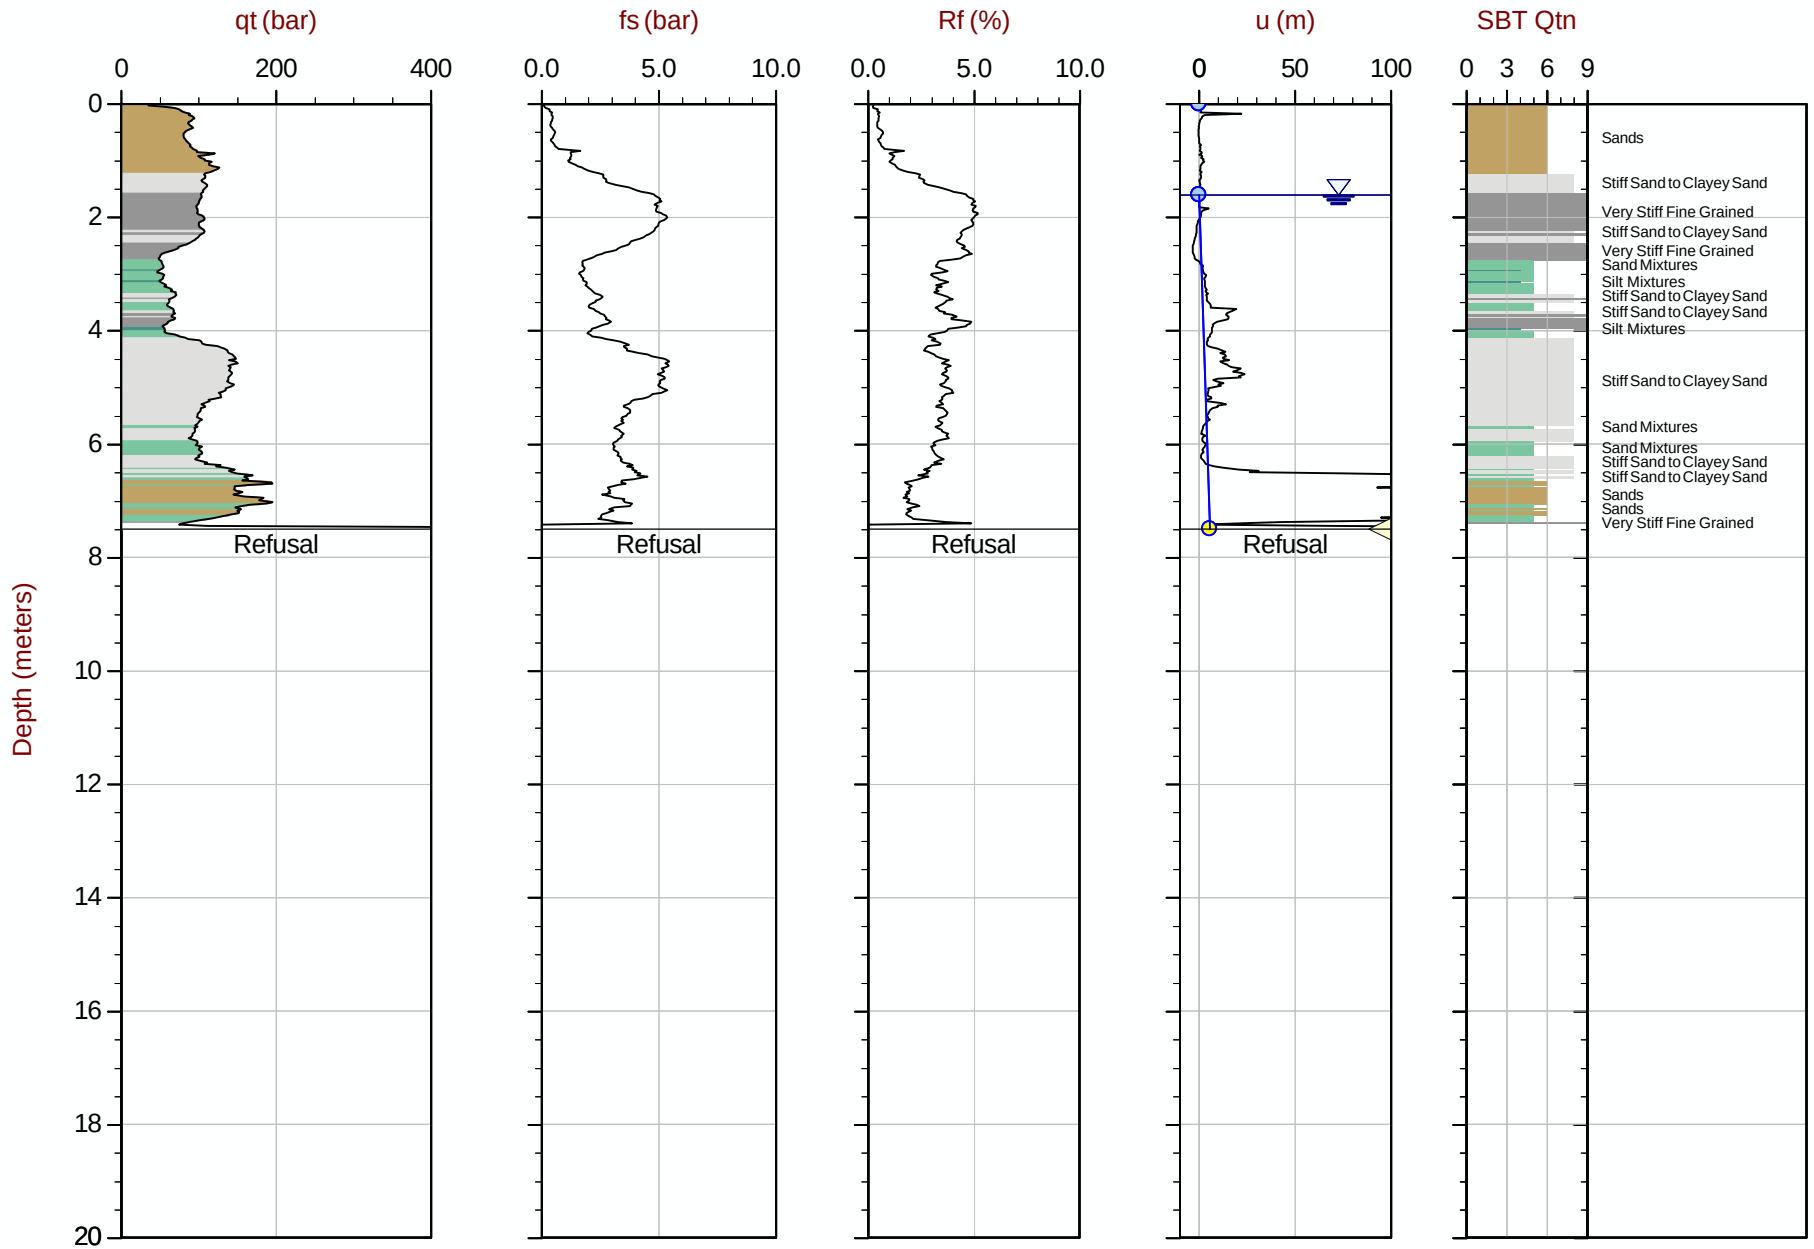

Max Depth: 7.500 m / 24.61 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT141.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612521m E: 416470m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 09:39
Site: Brooks, Alberta

Sounding: RCPT22-22CPT142
Cone: 854:T1500F15U35 Area= 15cm2

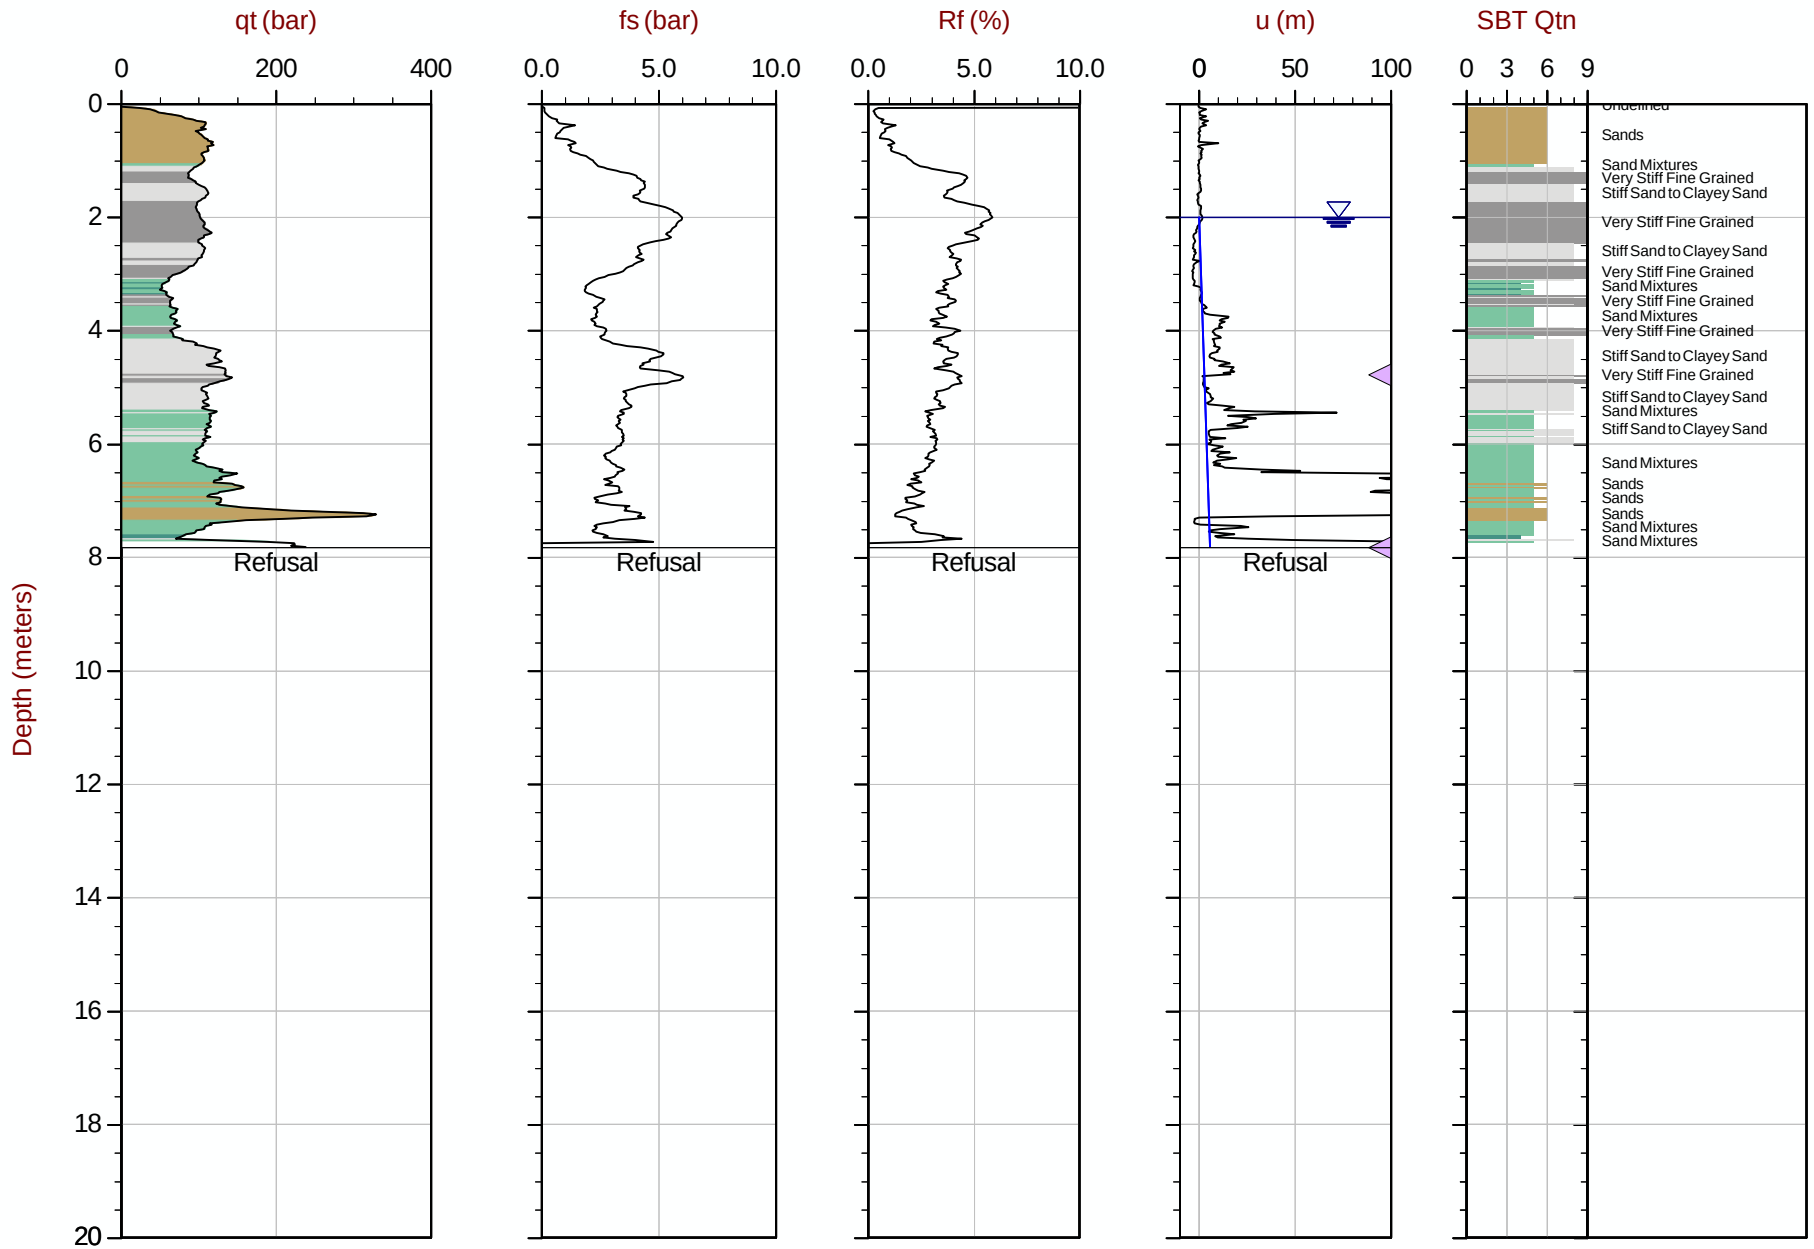

Max Depth: 7.825 m / 25.67 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT142.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612520m E: 416519m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 10:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT143
Cone: 854:T1500F15U35 Area= 15cm2

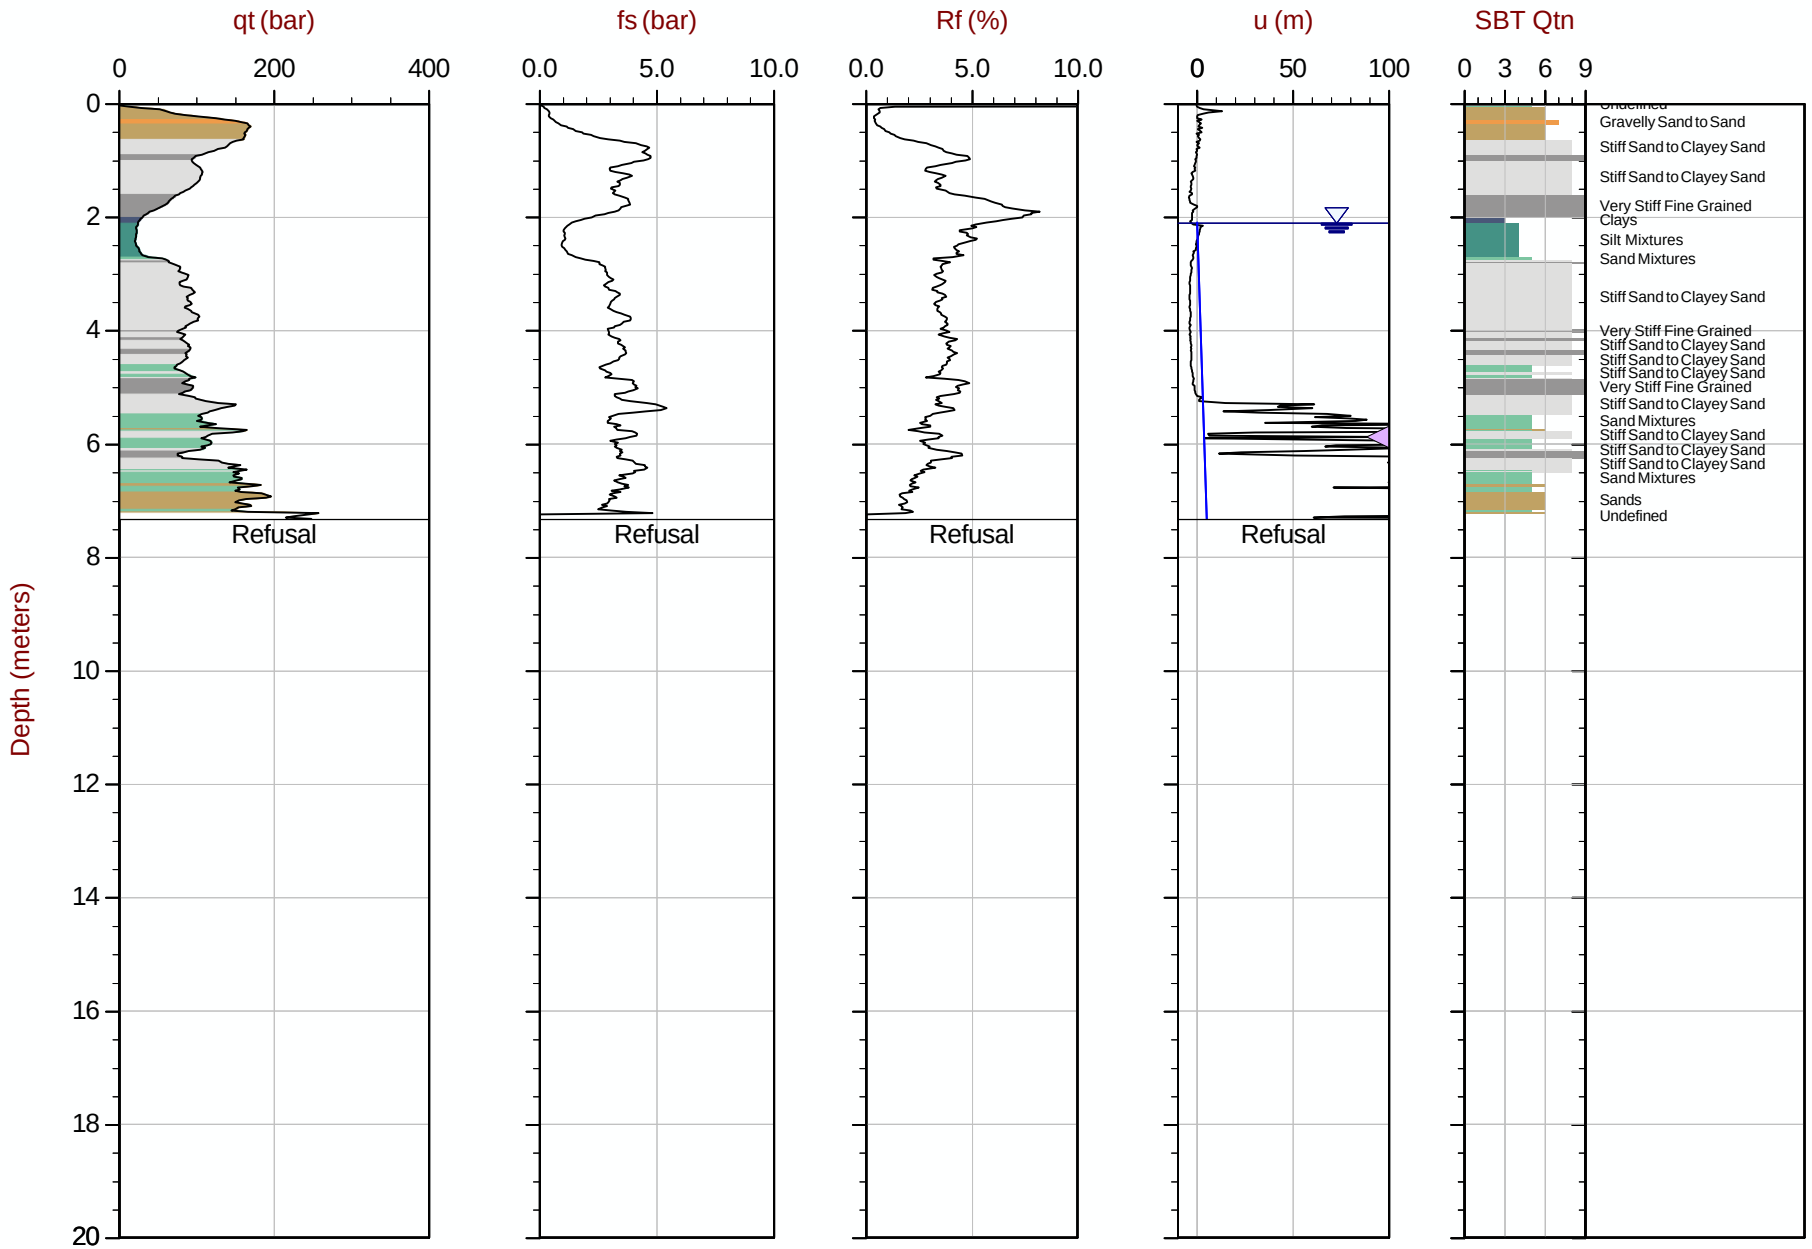

Max Depth: 7.325 m / 24.03 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT143.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612519m E: 416570m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 12:47
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT144
Cone: 854:T1500F15U35 Area= 15cm2

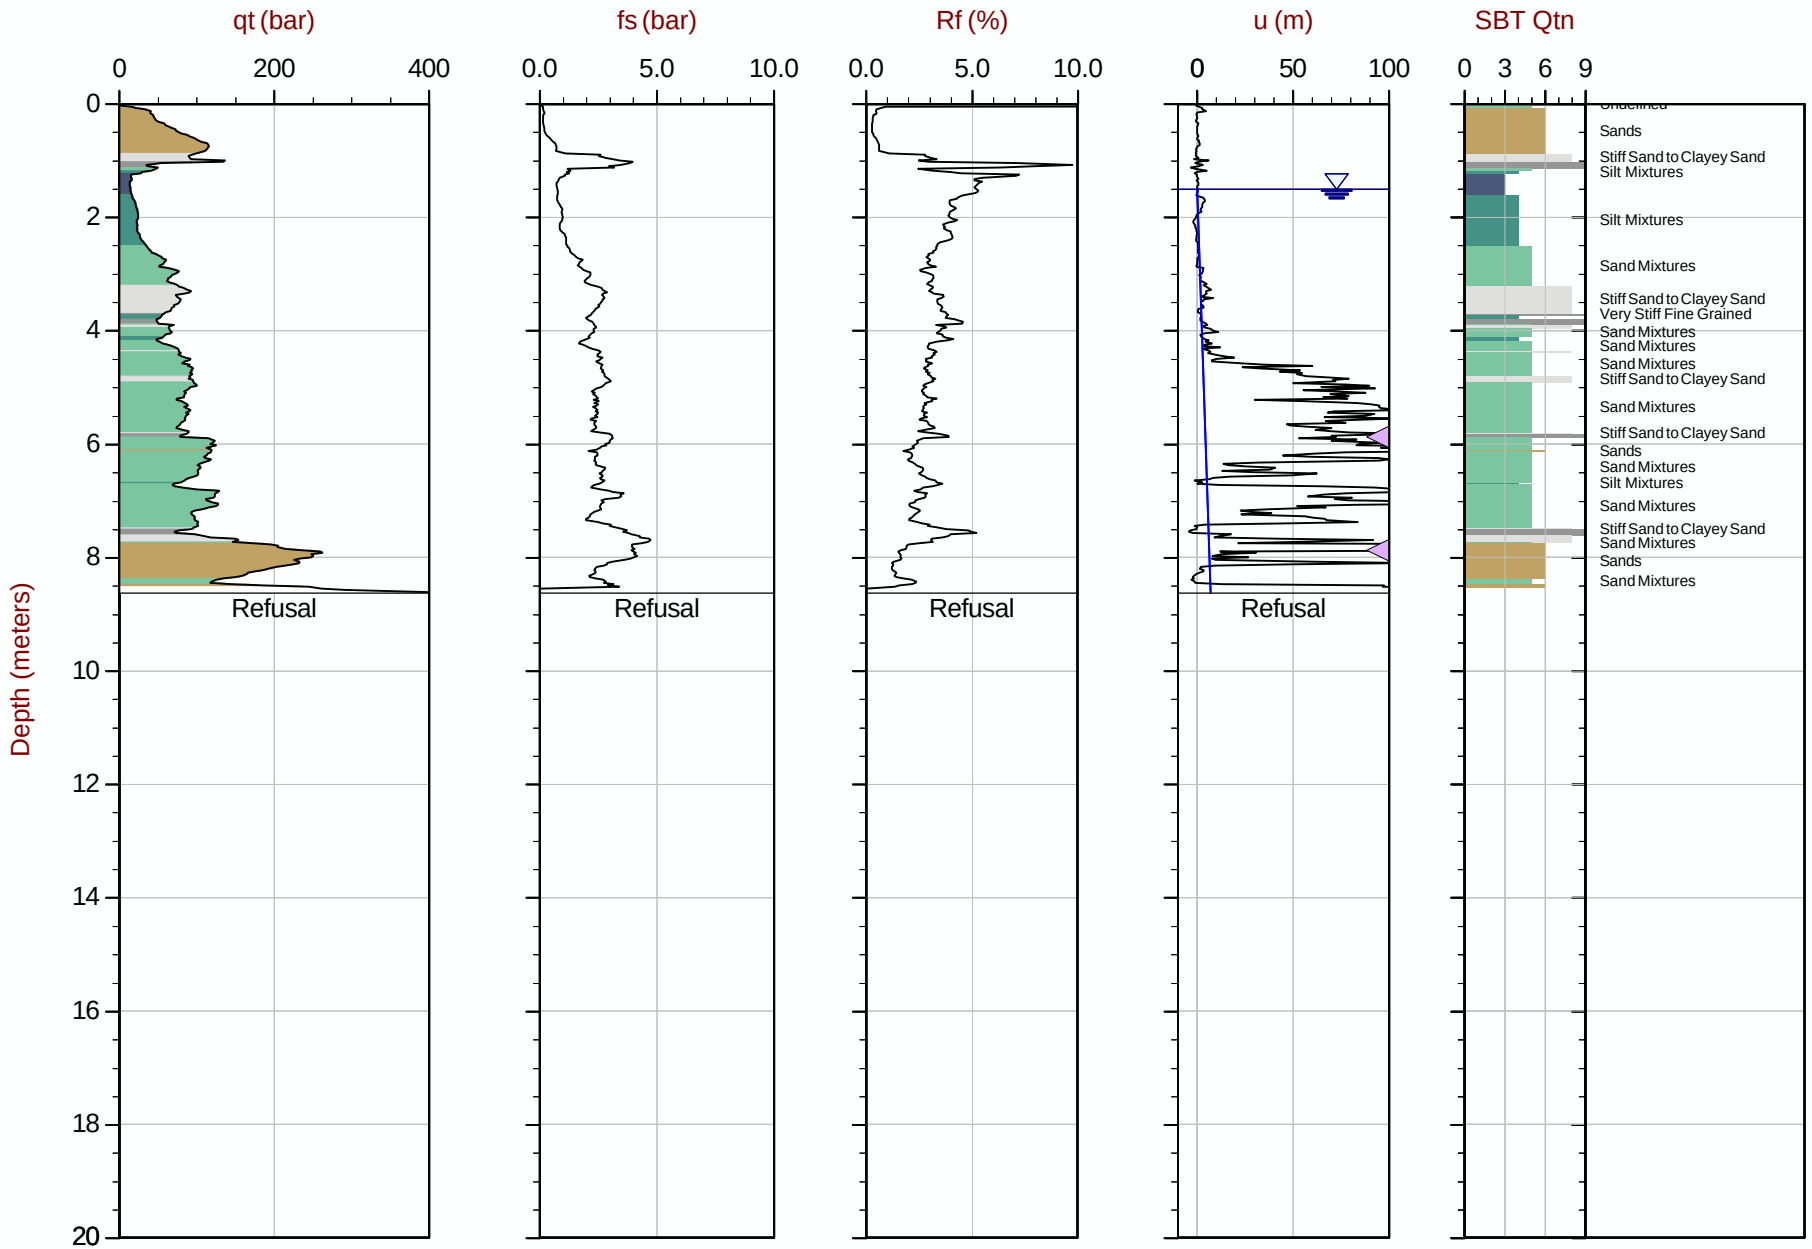

Max Depth: 8.625 m / 28.30 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT144.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612516m E: 416627m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 13:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT145
Cone: 854:T1500F15U35 Area= 15cm2

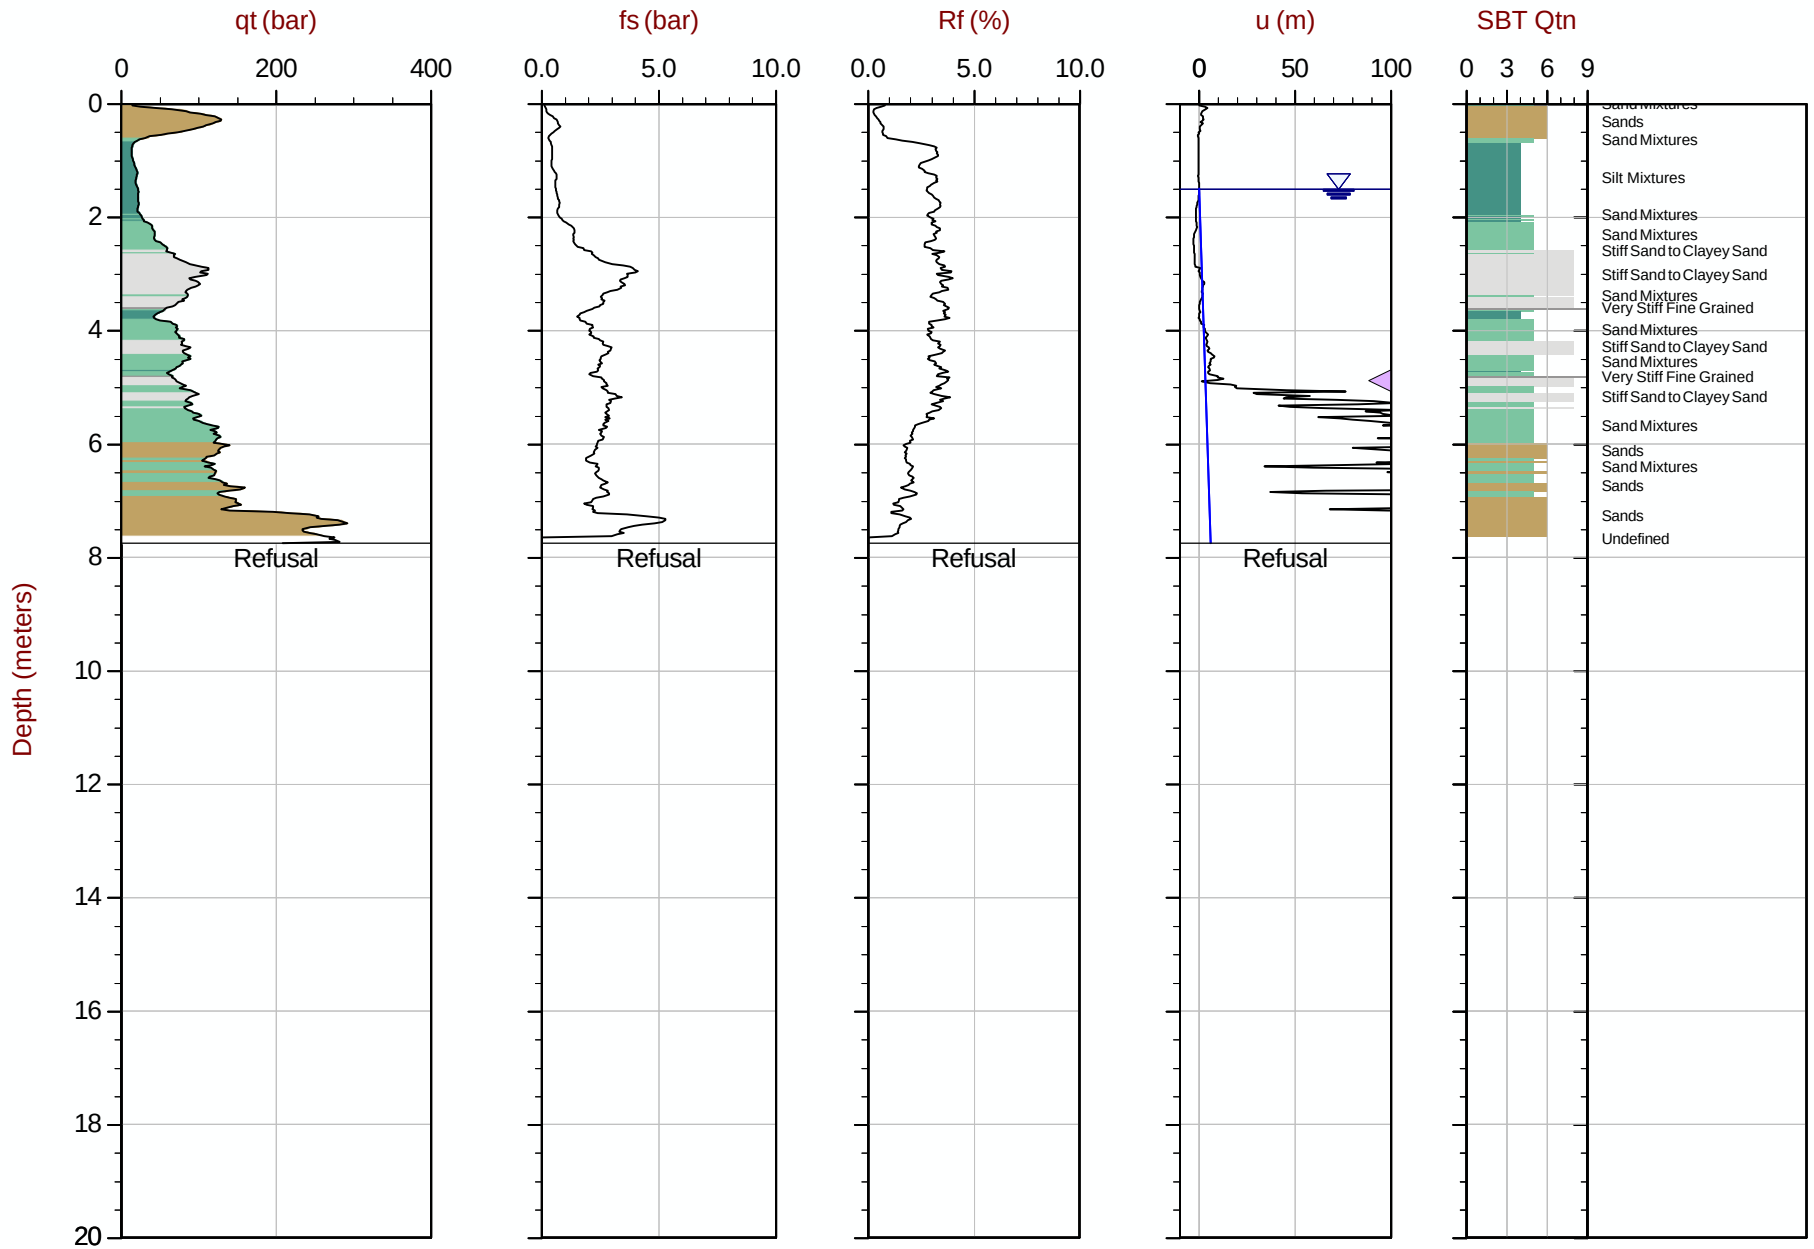

Max Depth: 7.750 m / 25.43 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT145.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612505m E: 416674m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 07:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT146
Cone: 651:T1500F15U35 Area= 15cm2

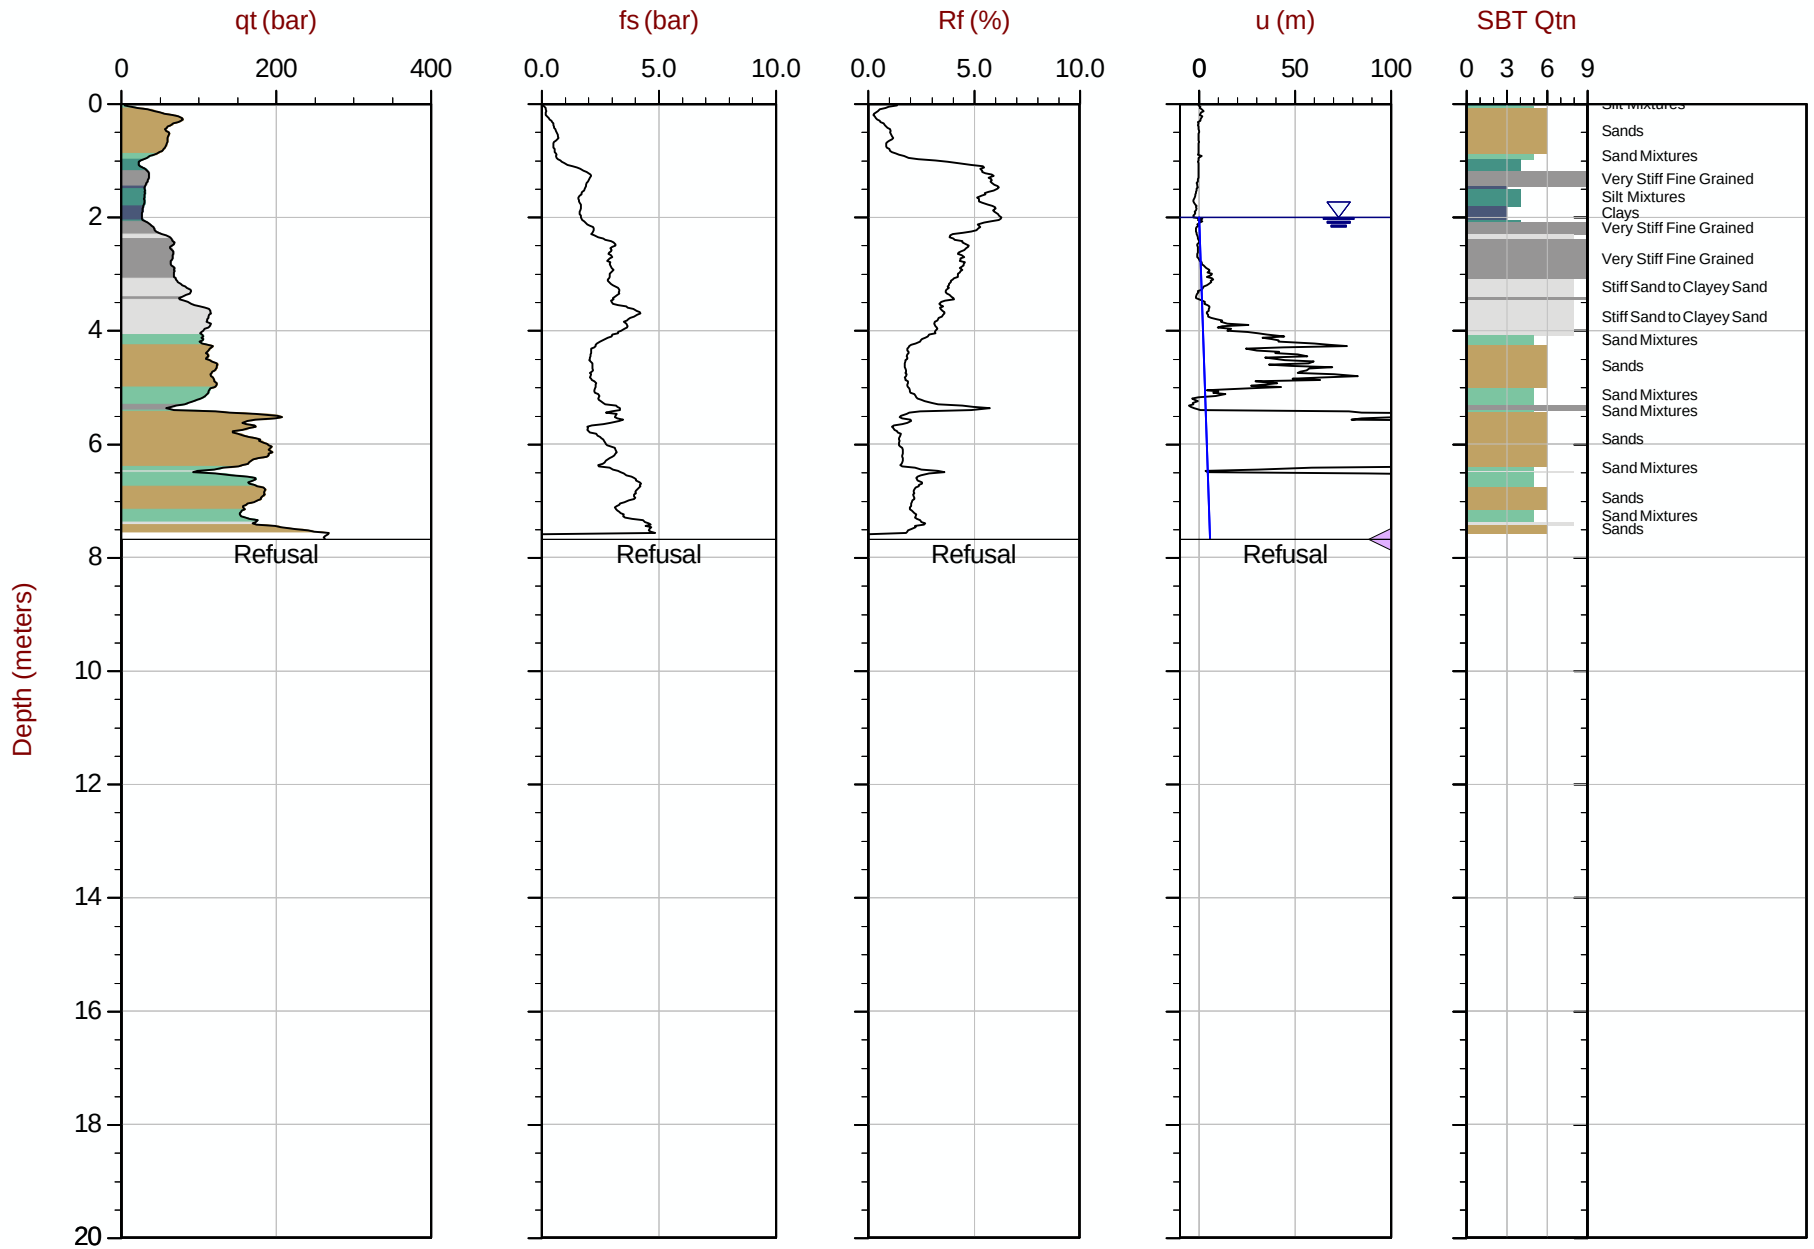

Max Depth: 7.675 m / 25.18 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT146.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612615m E: 414209m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 10:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT147
Cone: 651:T1500F15U35 Area= 15cm2

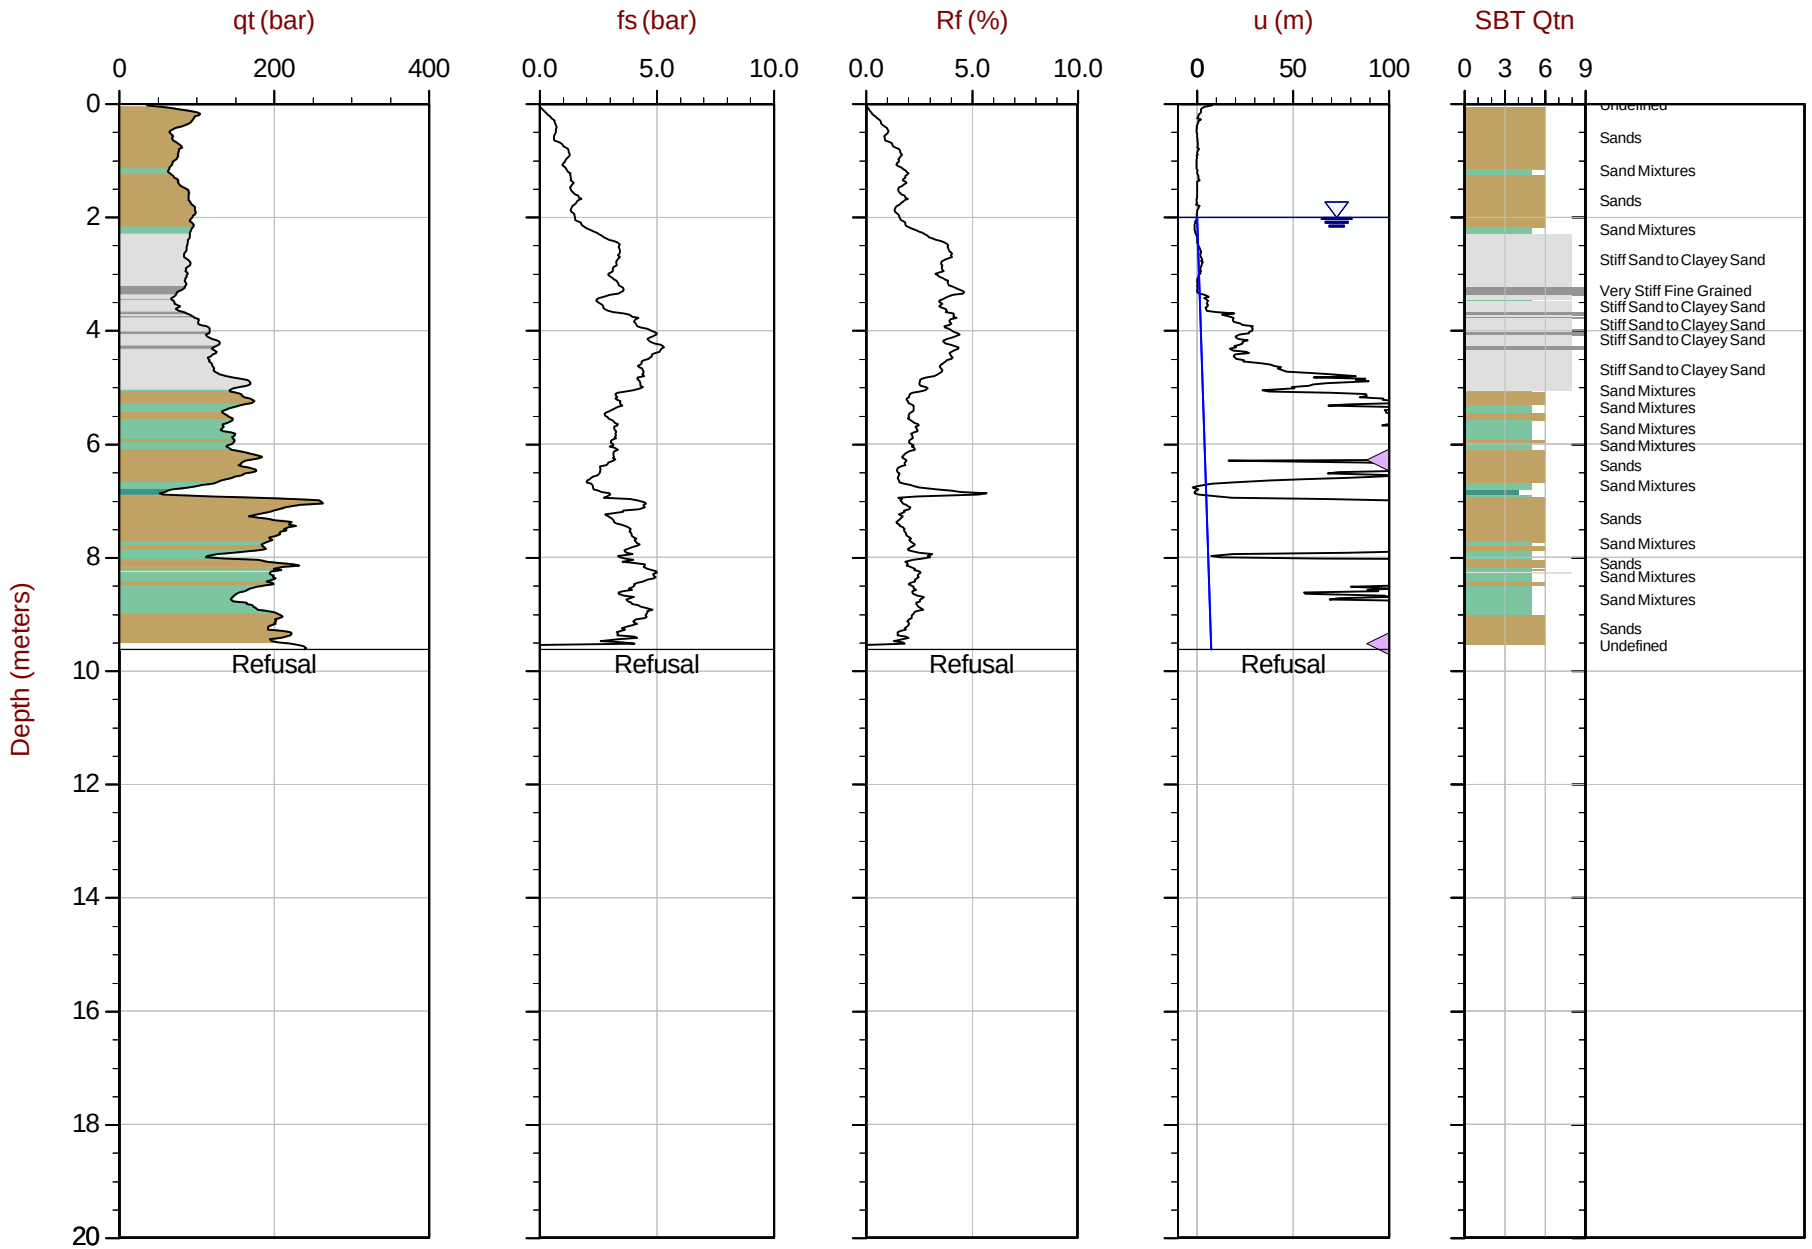

Max Depth: 9.625 m / 31.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT147.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612613m E: 414309m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 15:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT148
Cone: 750:T1500F15U35 Area= 15cm2

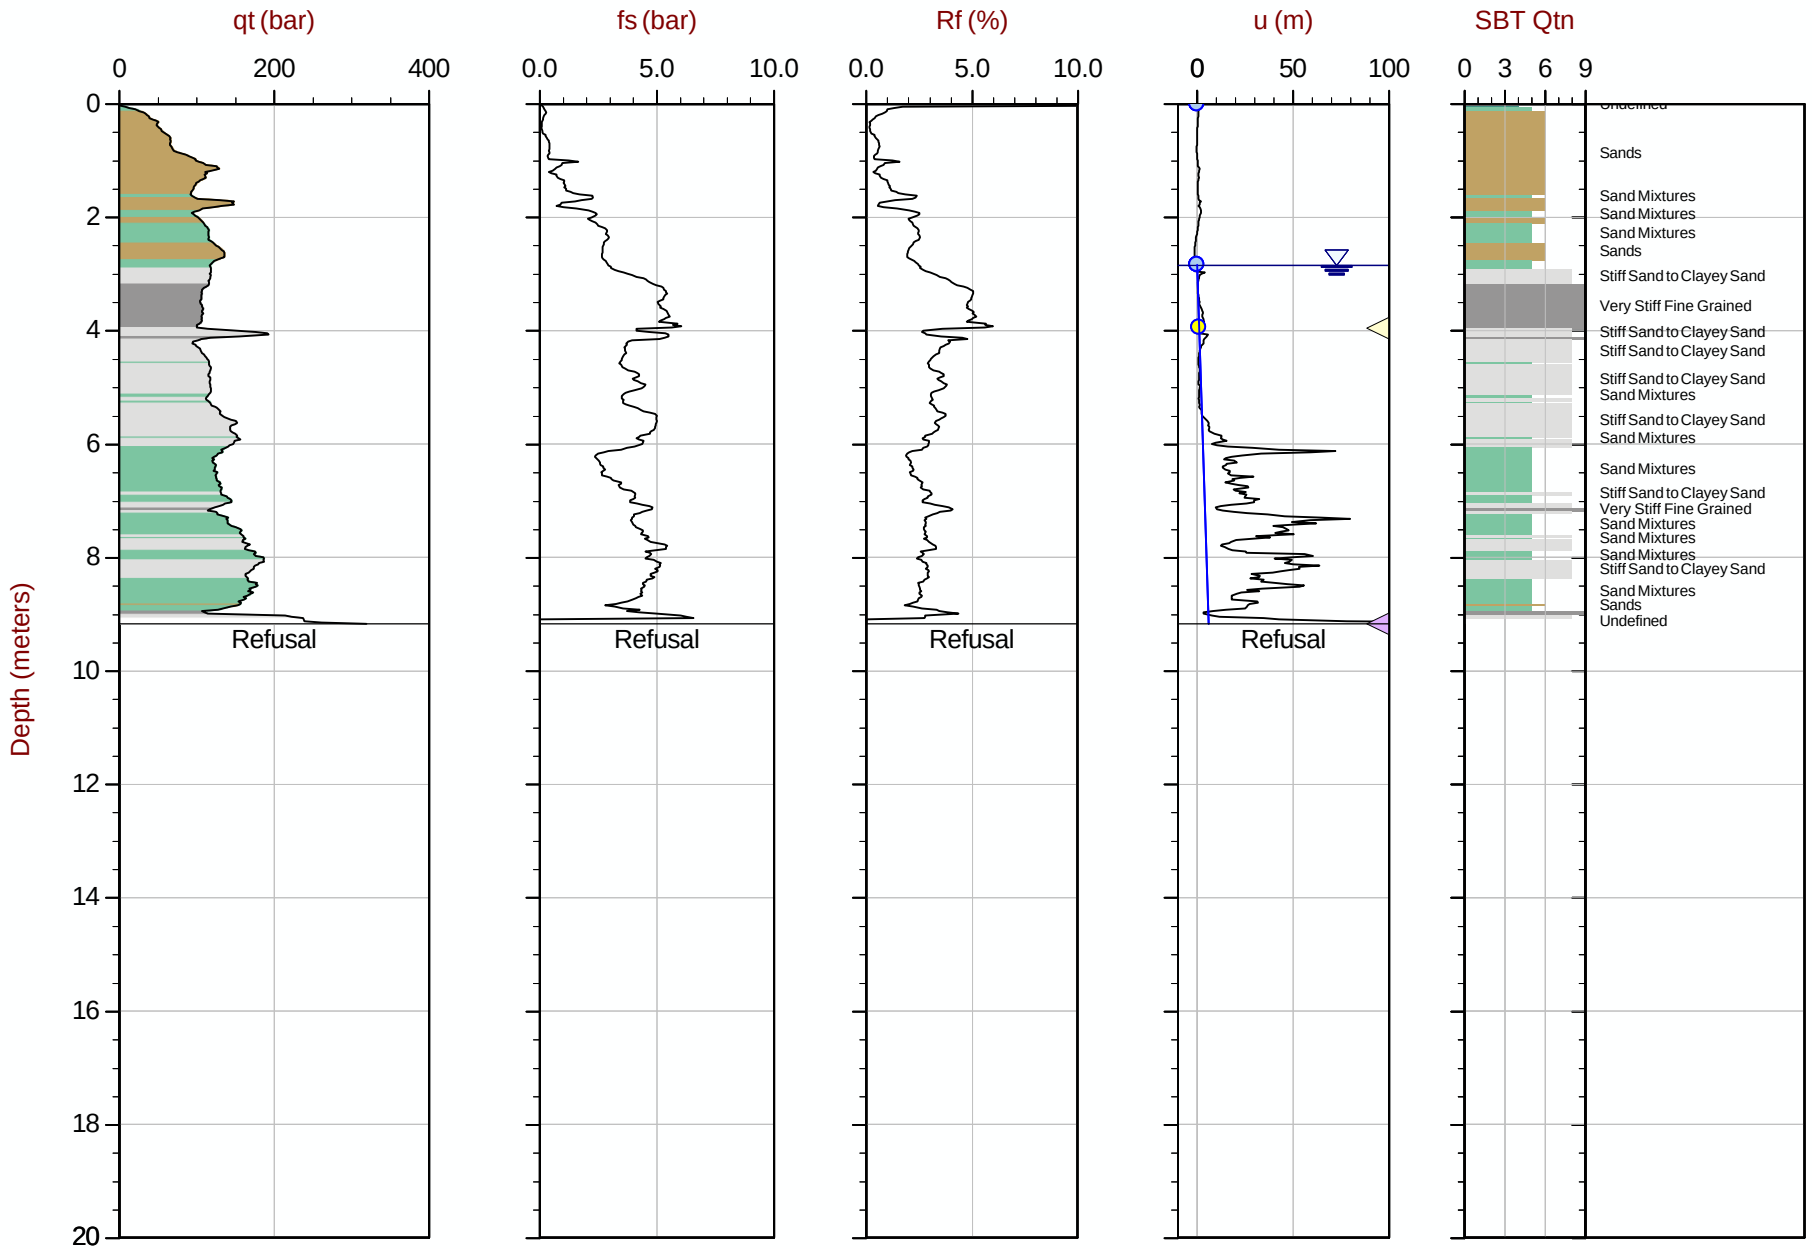

Max Depth: 9.175 m / 30.10 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT148.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612609m E: 414409m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 09:48
Site: Brooks, Alberta

Sounding: RCPT22-22CPT149
Cone: 750:T1500F15U35 Area= 15cm2

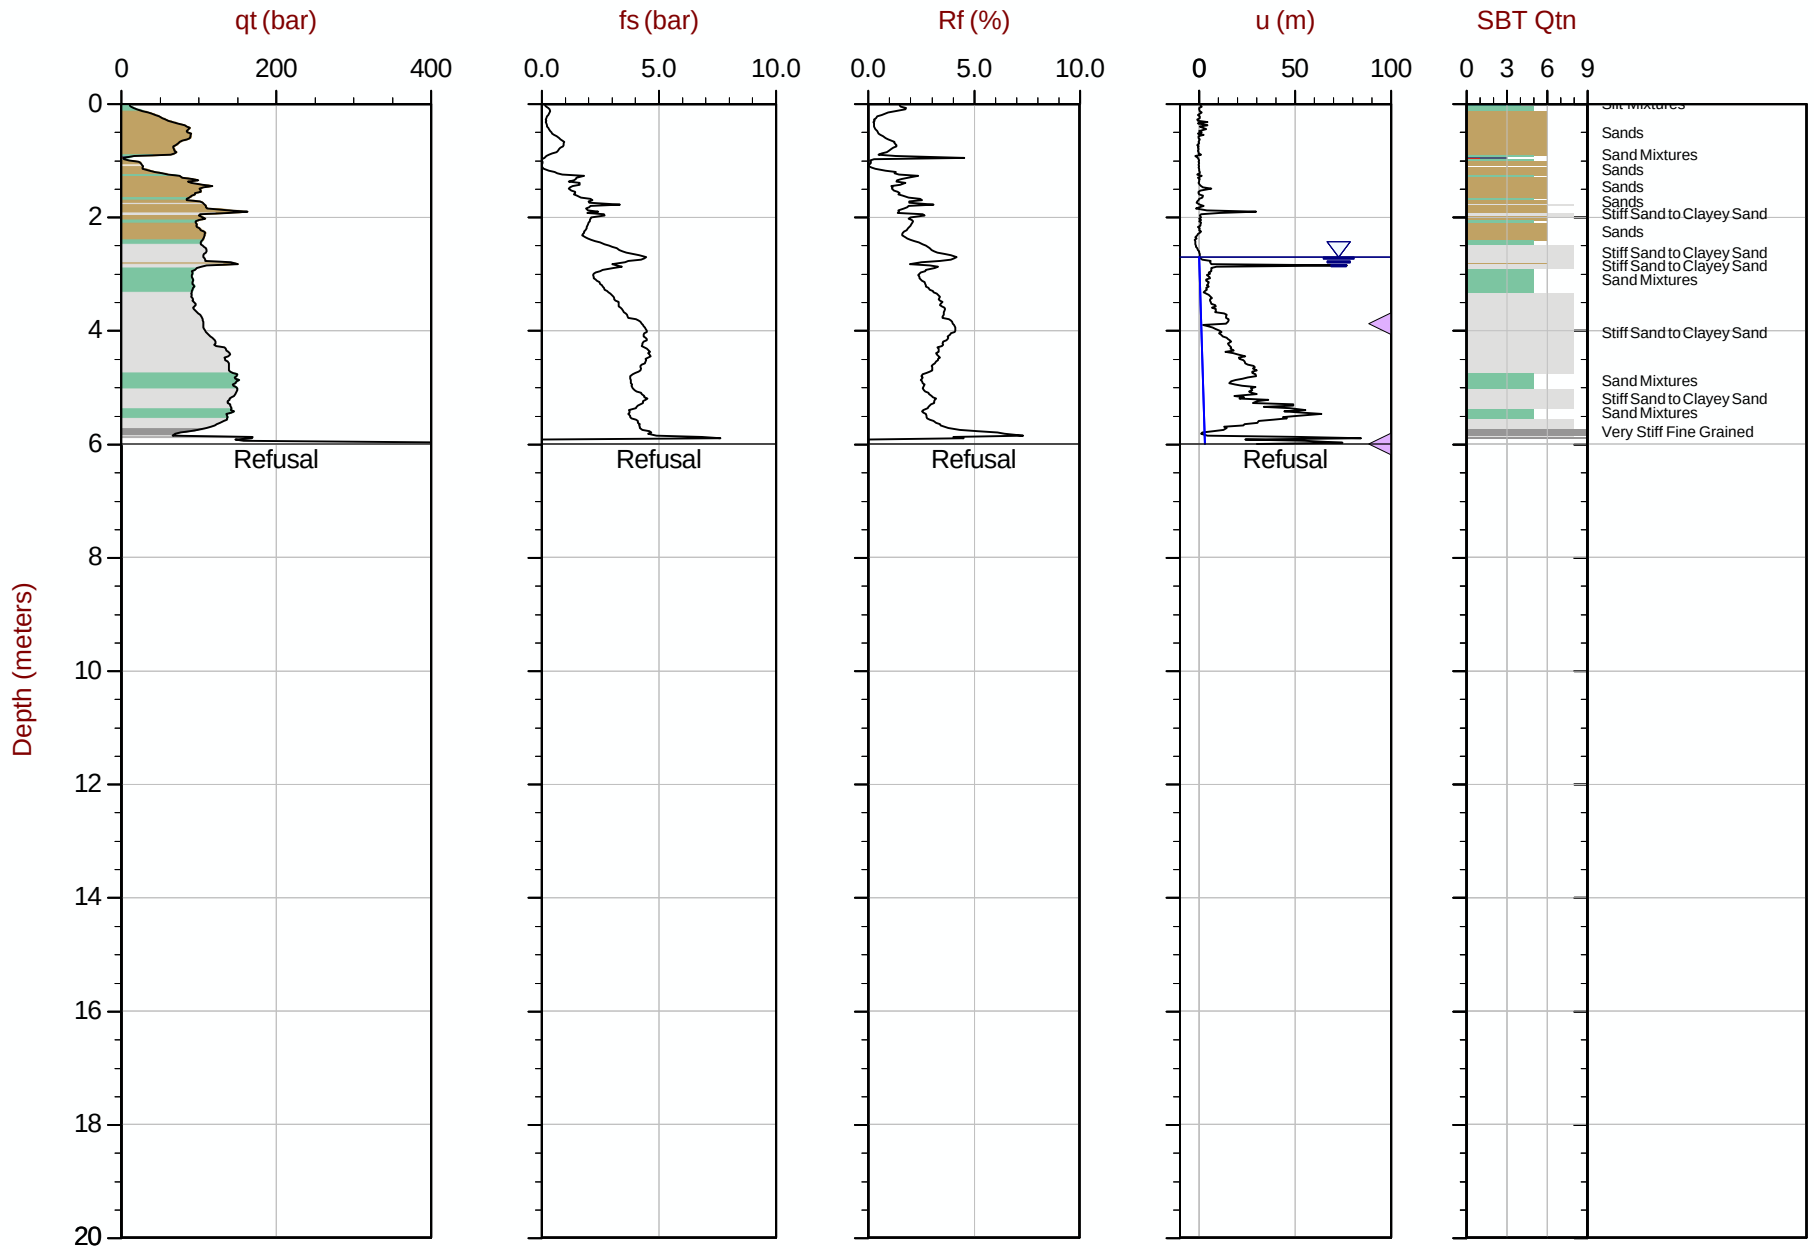

Max Depth: 6.000 m / 19.68 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT149.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612607m E: 414509m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 07:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT150
Cone: 750:T1500F15U35 Area= 15cm2

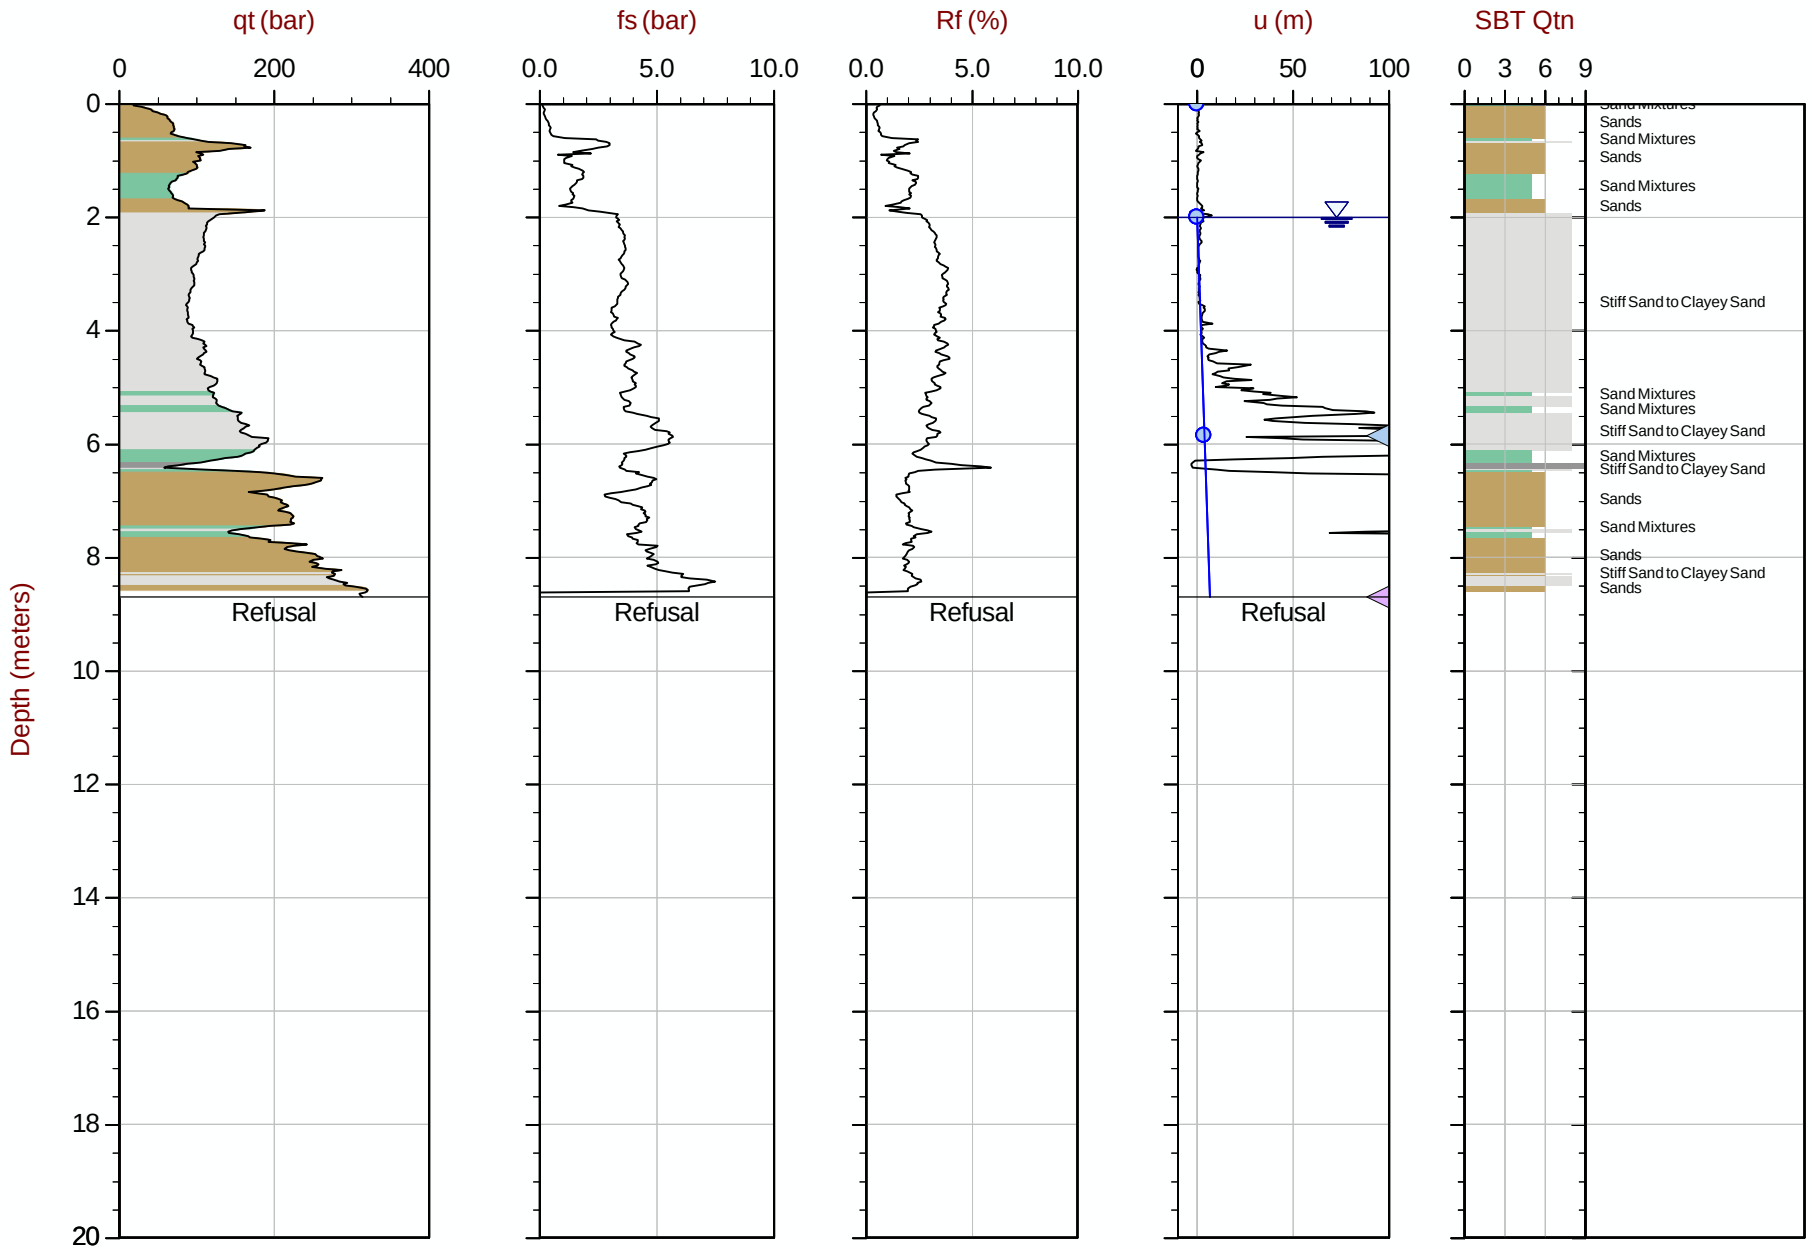

Max Depth: 8.700 m / 28.54 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT150.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612610m E: 414609m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 15:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT151
Cone: 750:T1500F15U35 Area= 15cm2

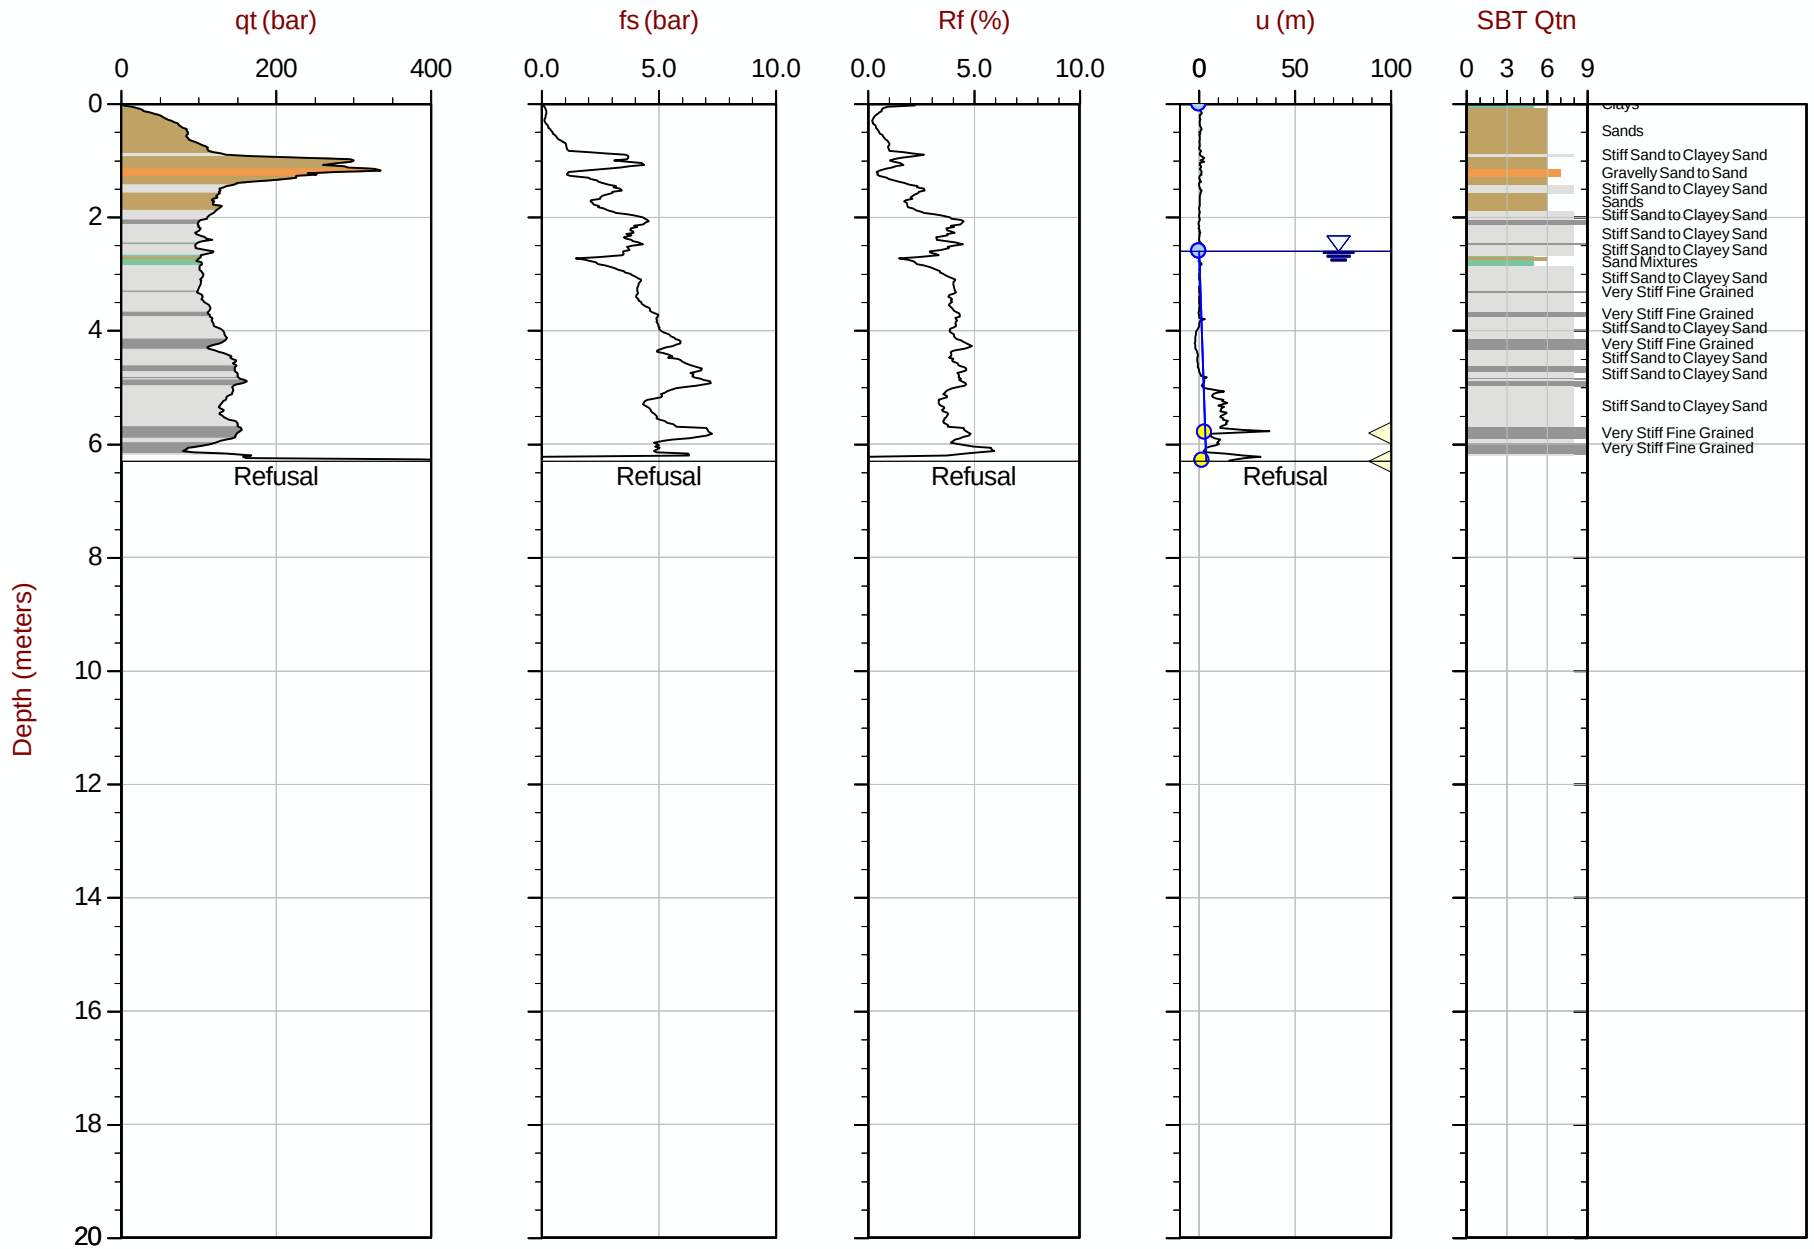

Max Depth: 6.300 m / 20.67 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT151.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612606m E: 414709m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 13:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT152
Cone: 750:T1500F15U35 Area= 15cm2

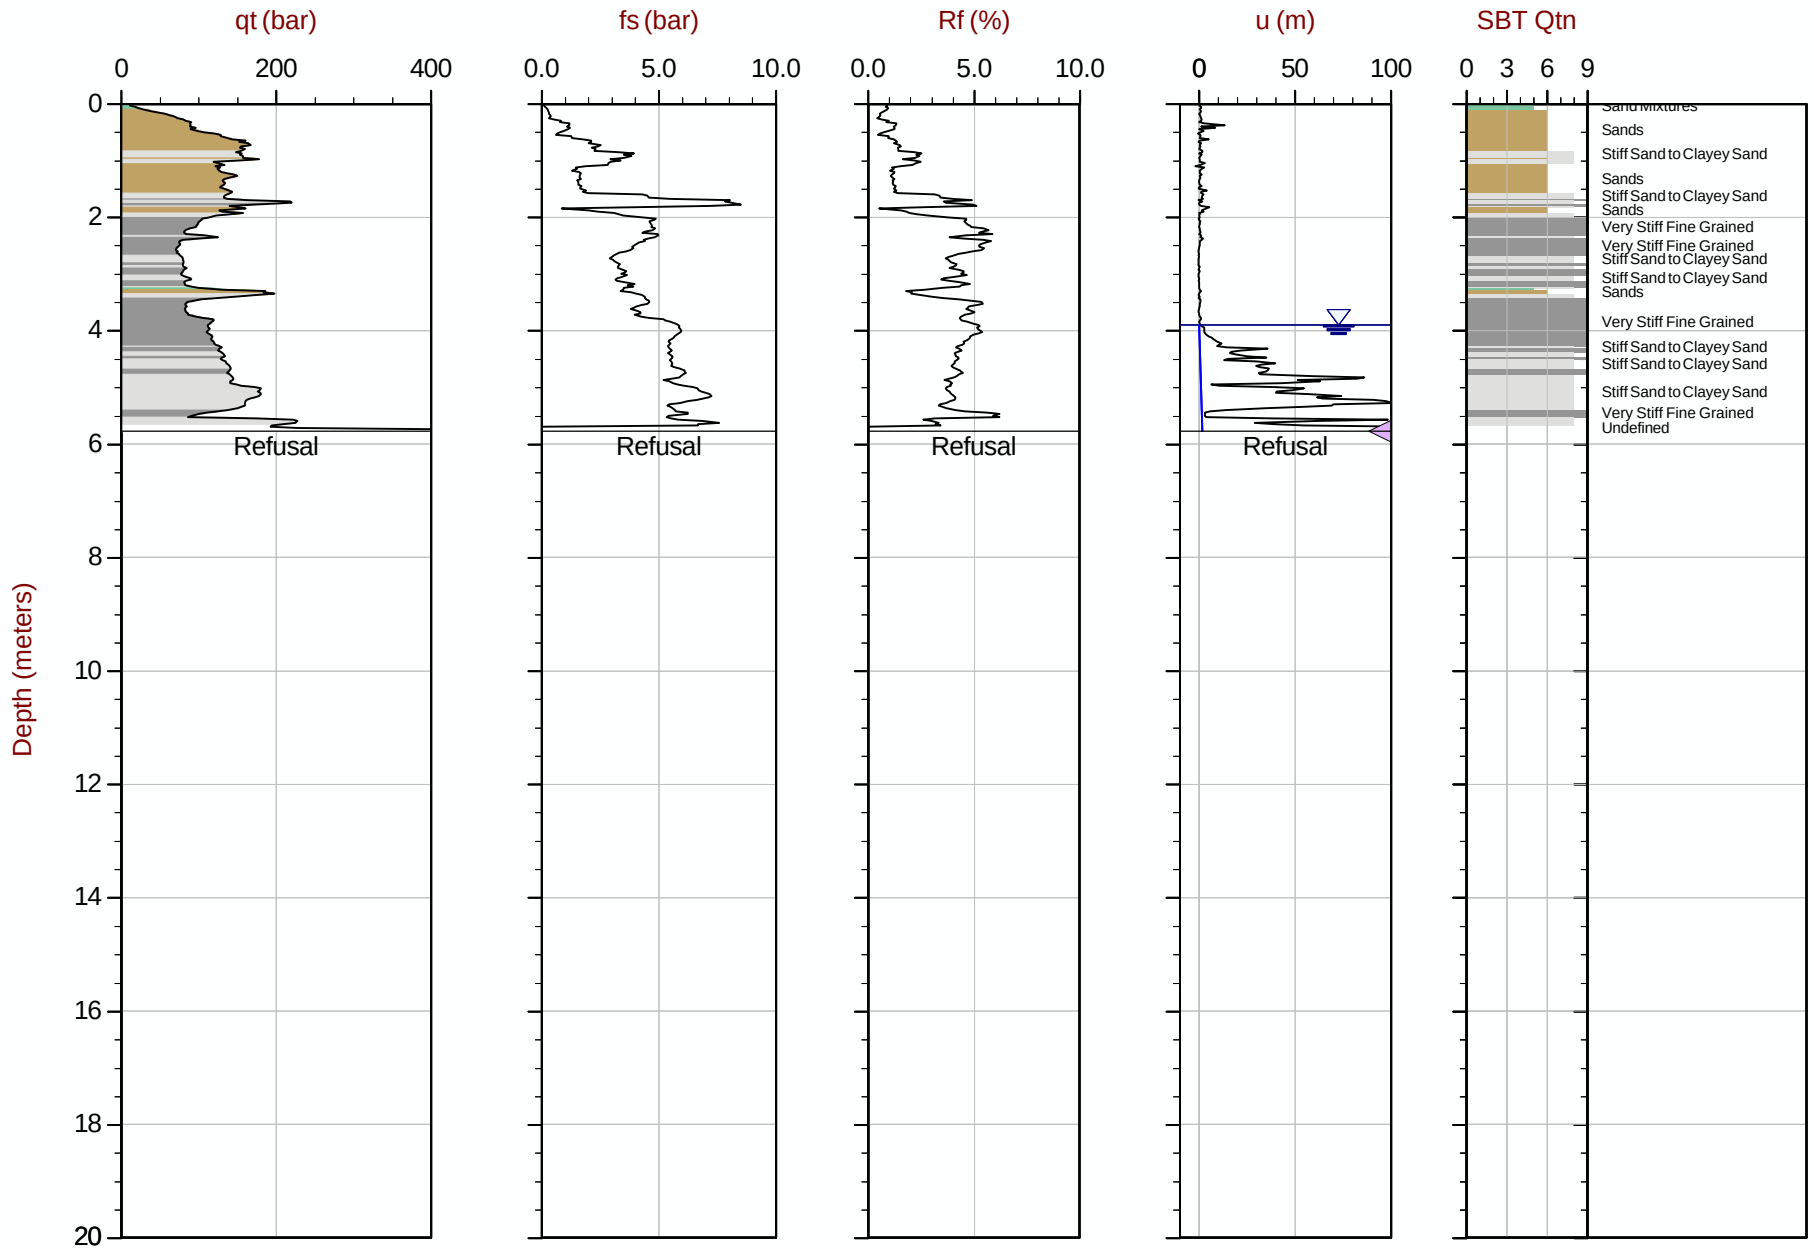

Max Depth: 5.775 m / 18.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT152.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612603m E: 414809m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 10:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT153
Cone: 750:T1500F15U35 Area= 15cm2

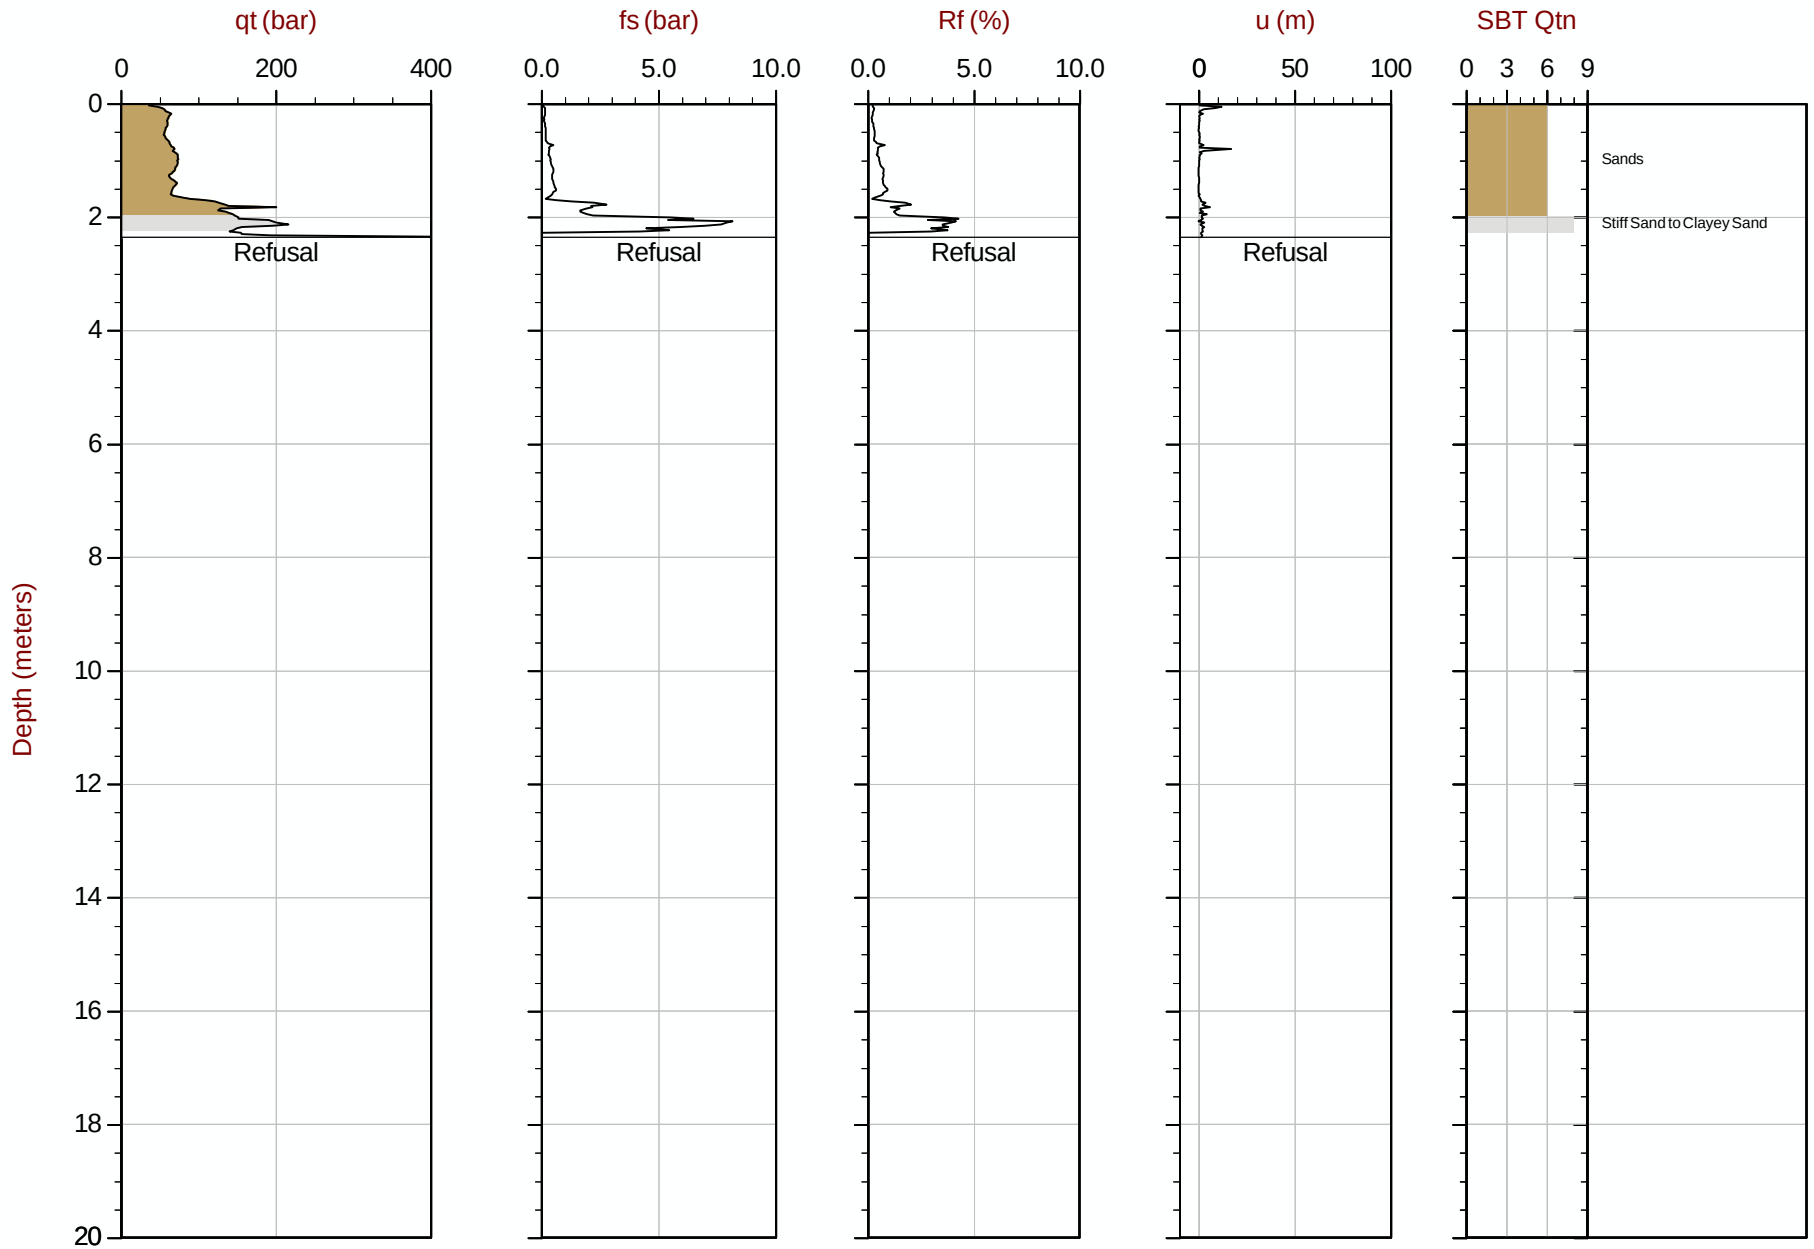

Max Depth: 2.350 m / 7.71 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT153.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612604m E: 414909m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 10:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT153A
Cone: 750:T1500F15U35 Area= 15cm2

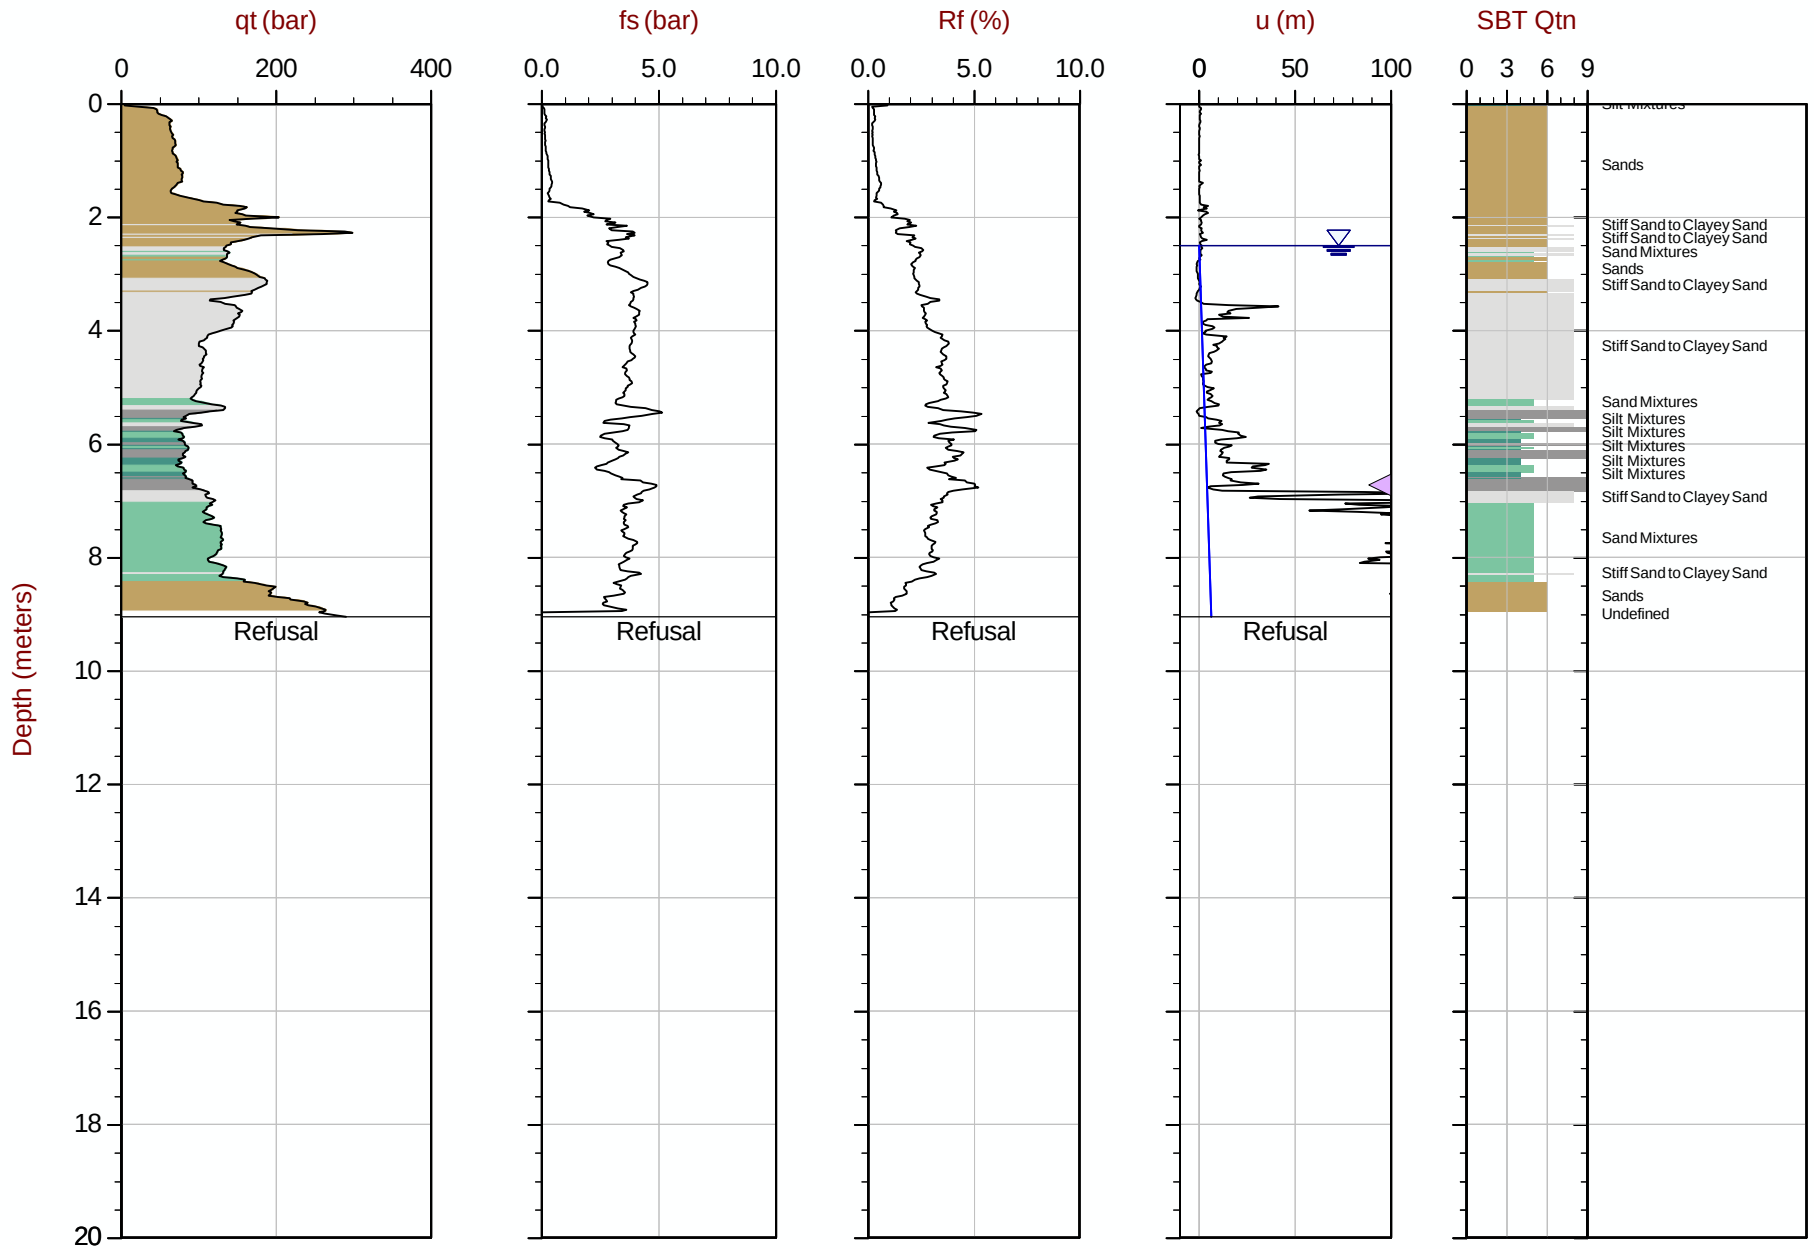

Max Depth: 9.050 m / 29.69 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT153A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612604m E: 414909m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 07:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT154
Cone: 750:T1500F15U35 Area= 15cm2

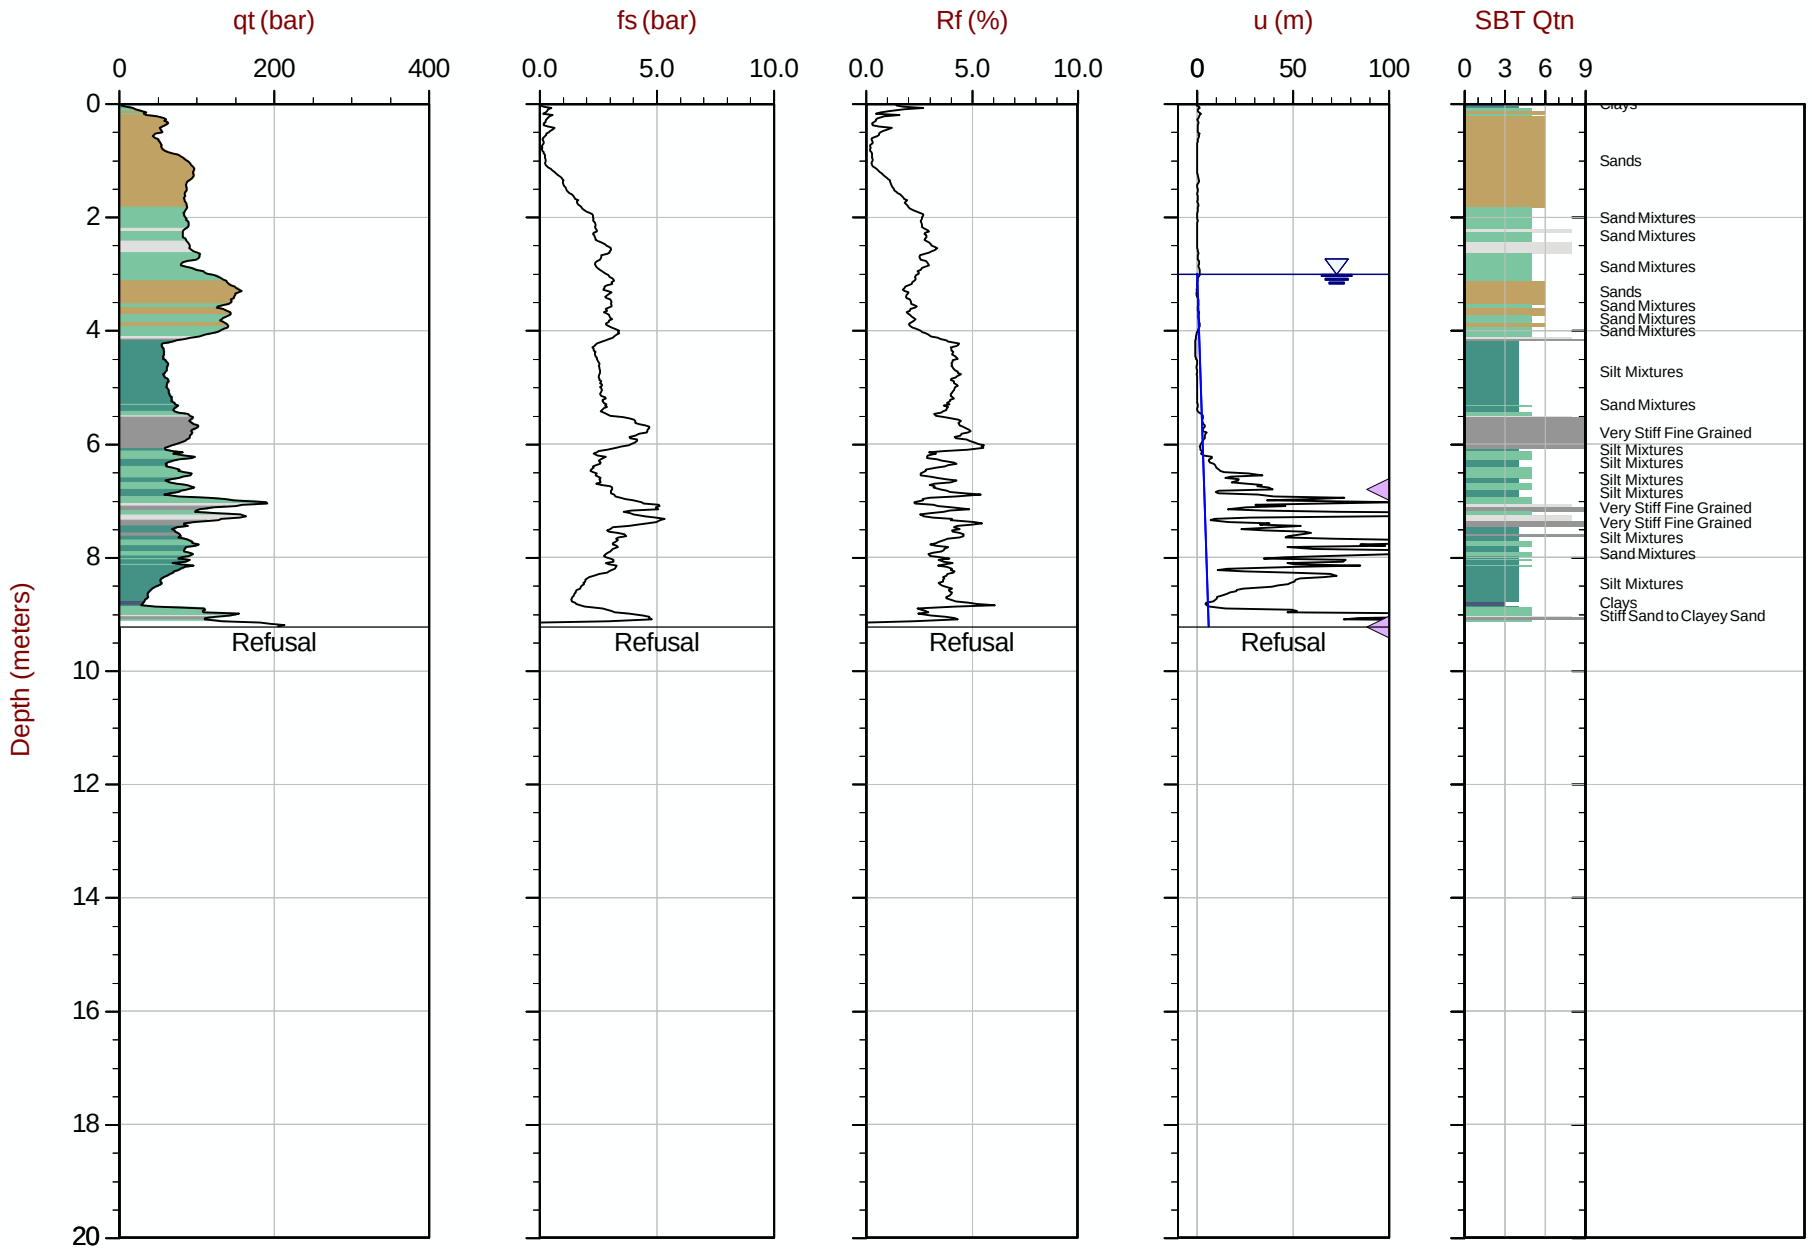

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT154.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612607m E: 414509m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 12:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT155
Cone: 750:T1500F15U35 Area= 15cm2

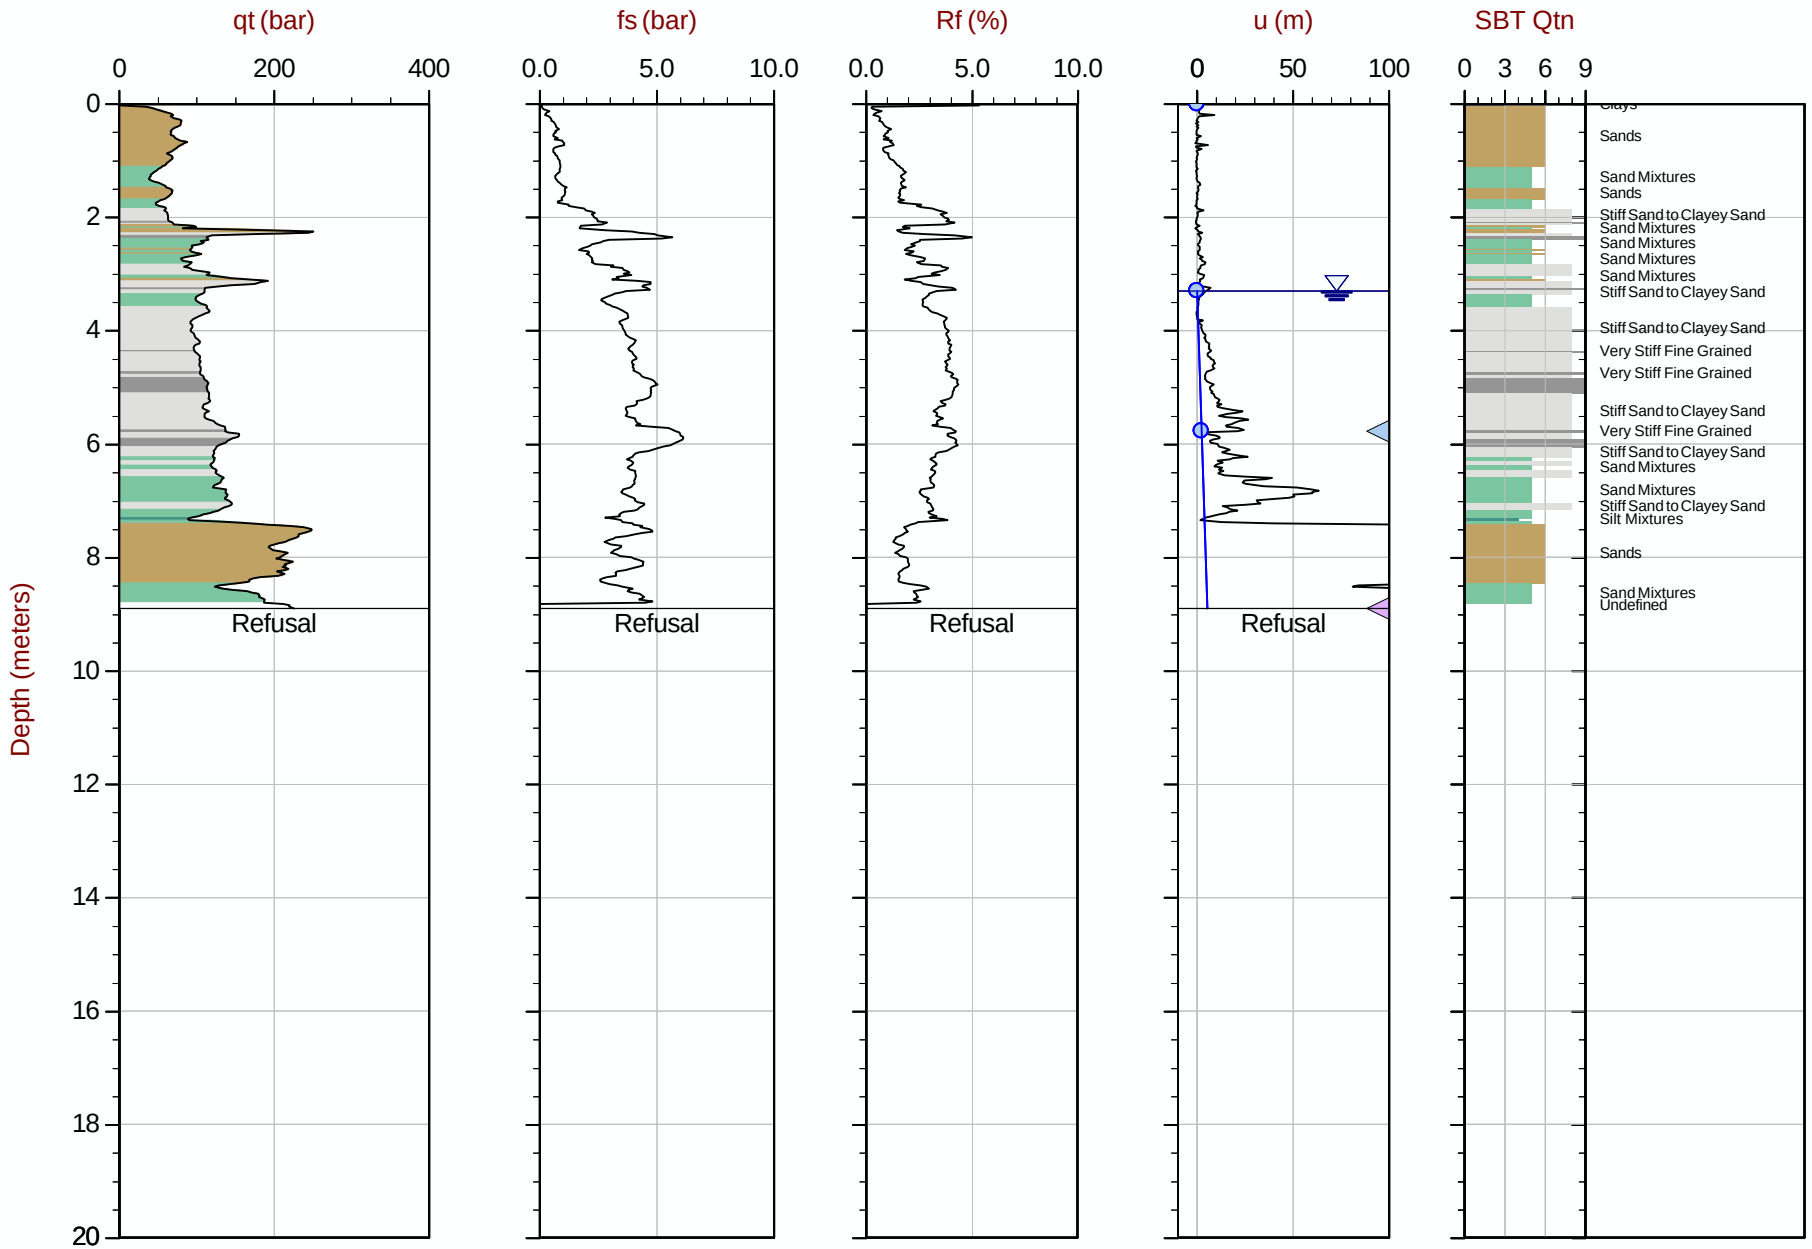

Max Depth: 8.900 m / 29.20 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT155.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612604m E: 415110m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT156
Cone: 750:T1500F15U35 Area= 15cm2

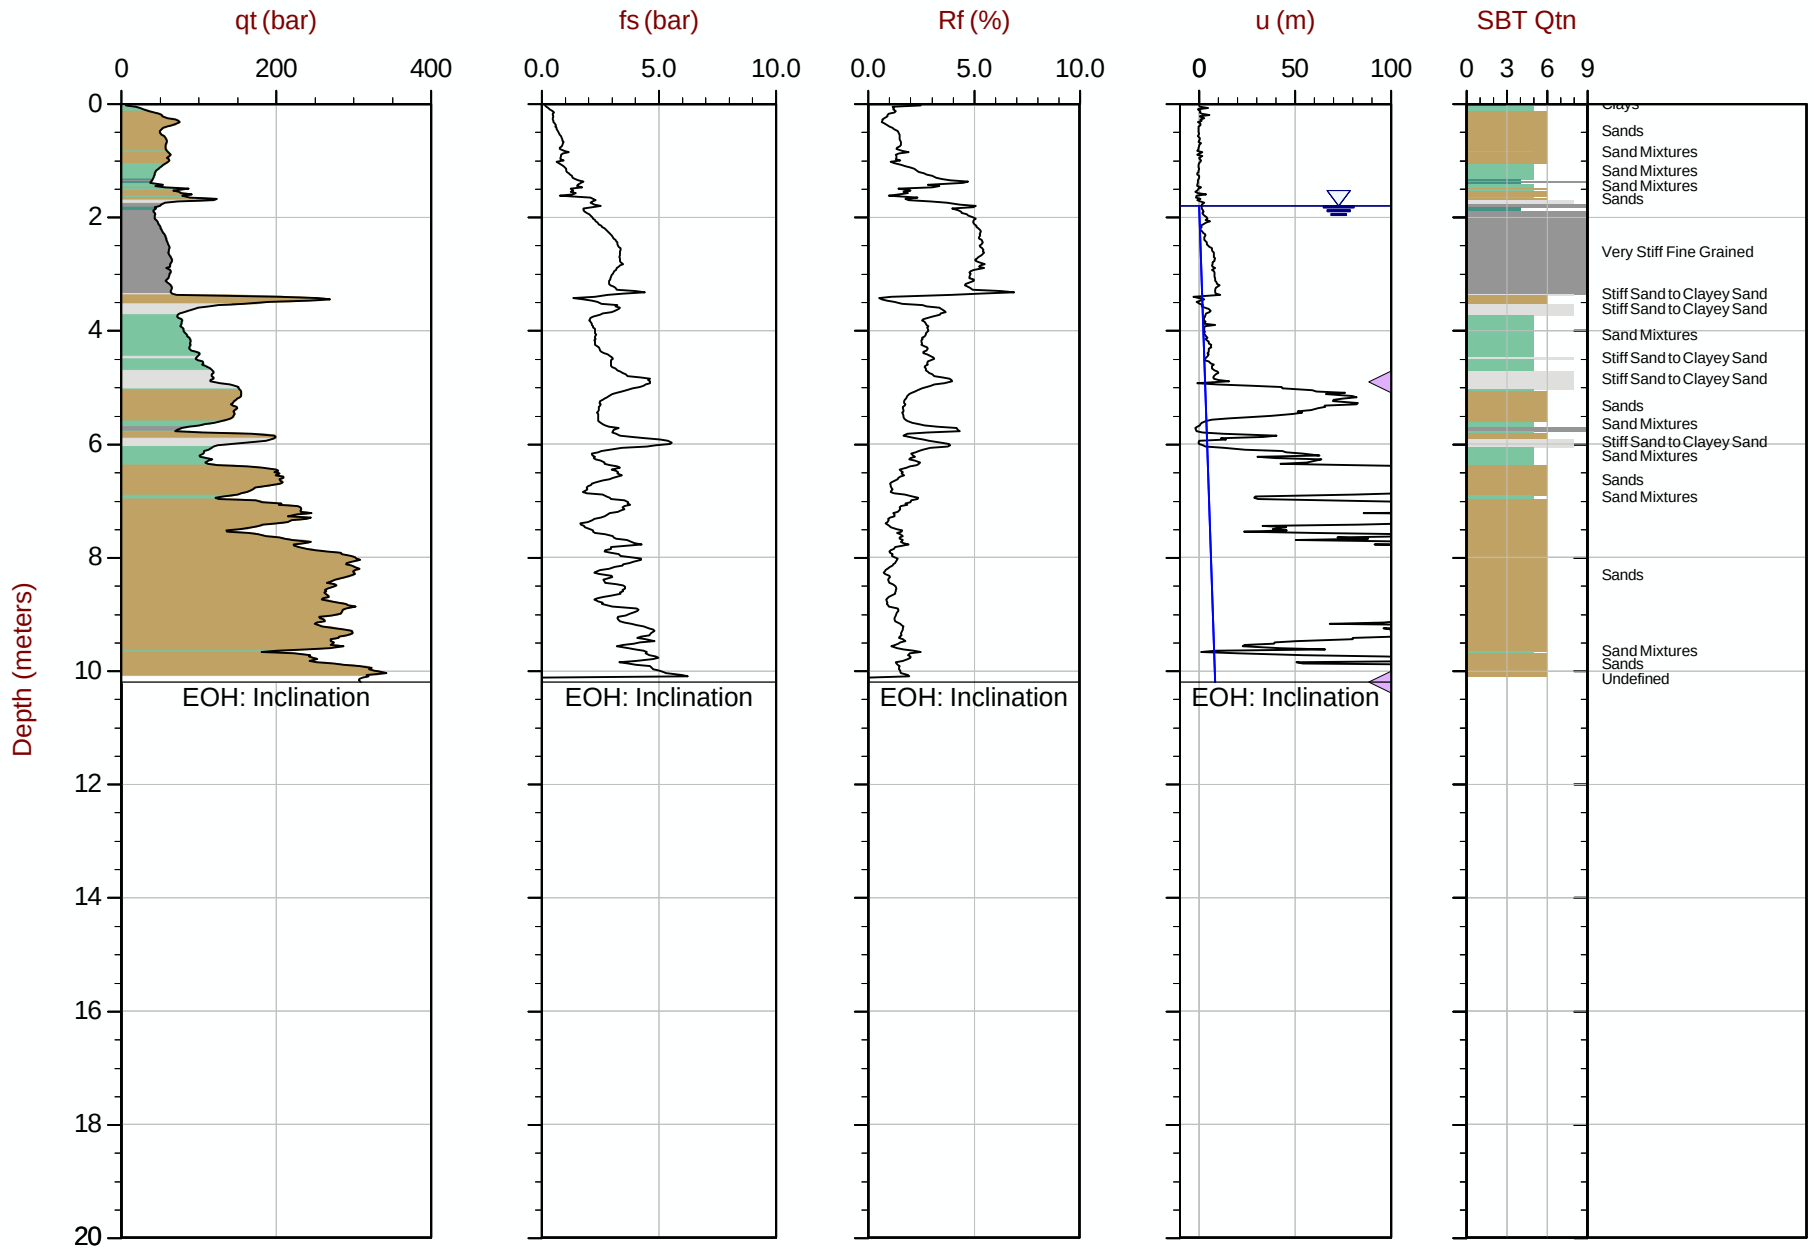

Max Depth: 10.200 m / 33.46 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT156.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612602m E: 415210m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT157
Cone: 750:T1500F15U35 Area= 15cm2

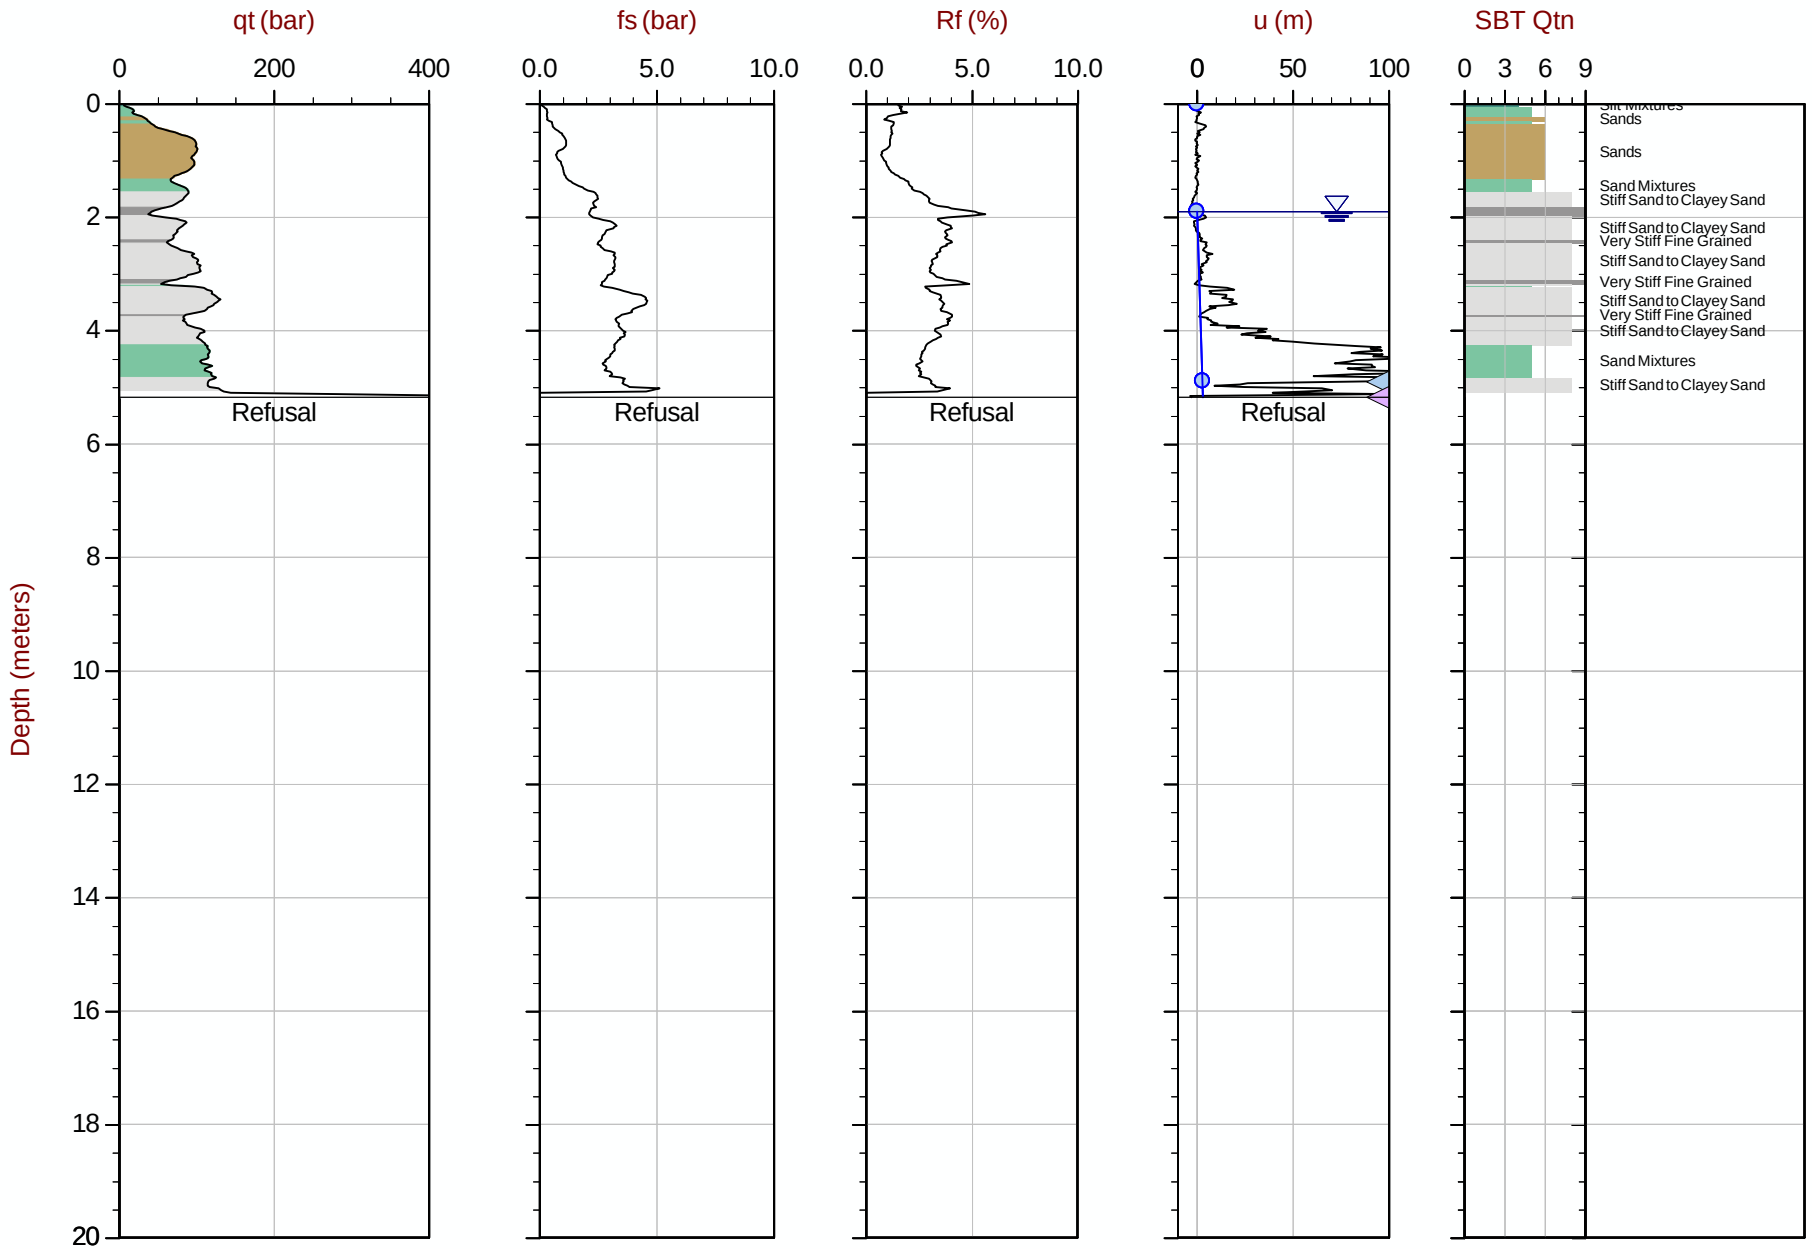

Max Depth: 5.175 m / 16.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT157.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 415311m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 15:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT158
Cone: 750:T1500F15U35 Area= 15cm2

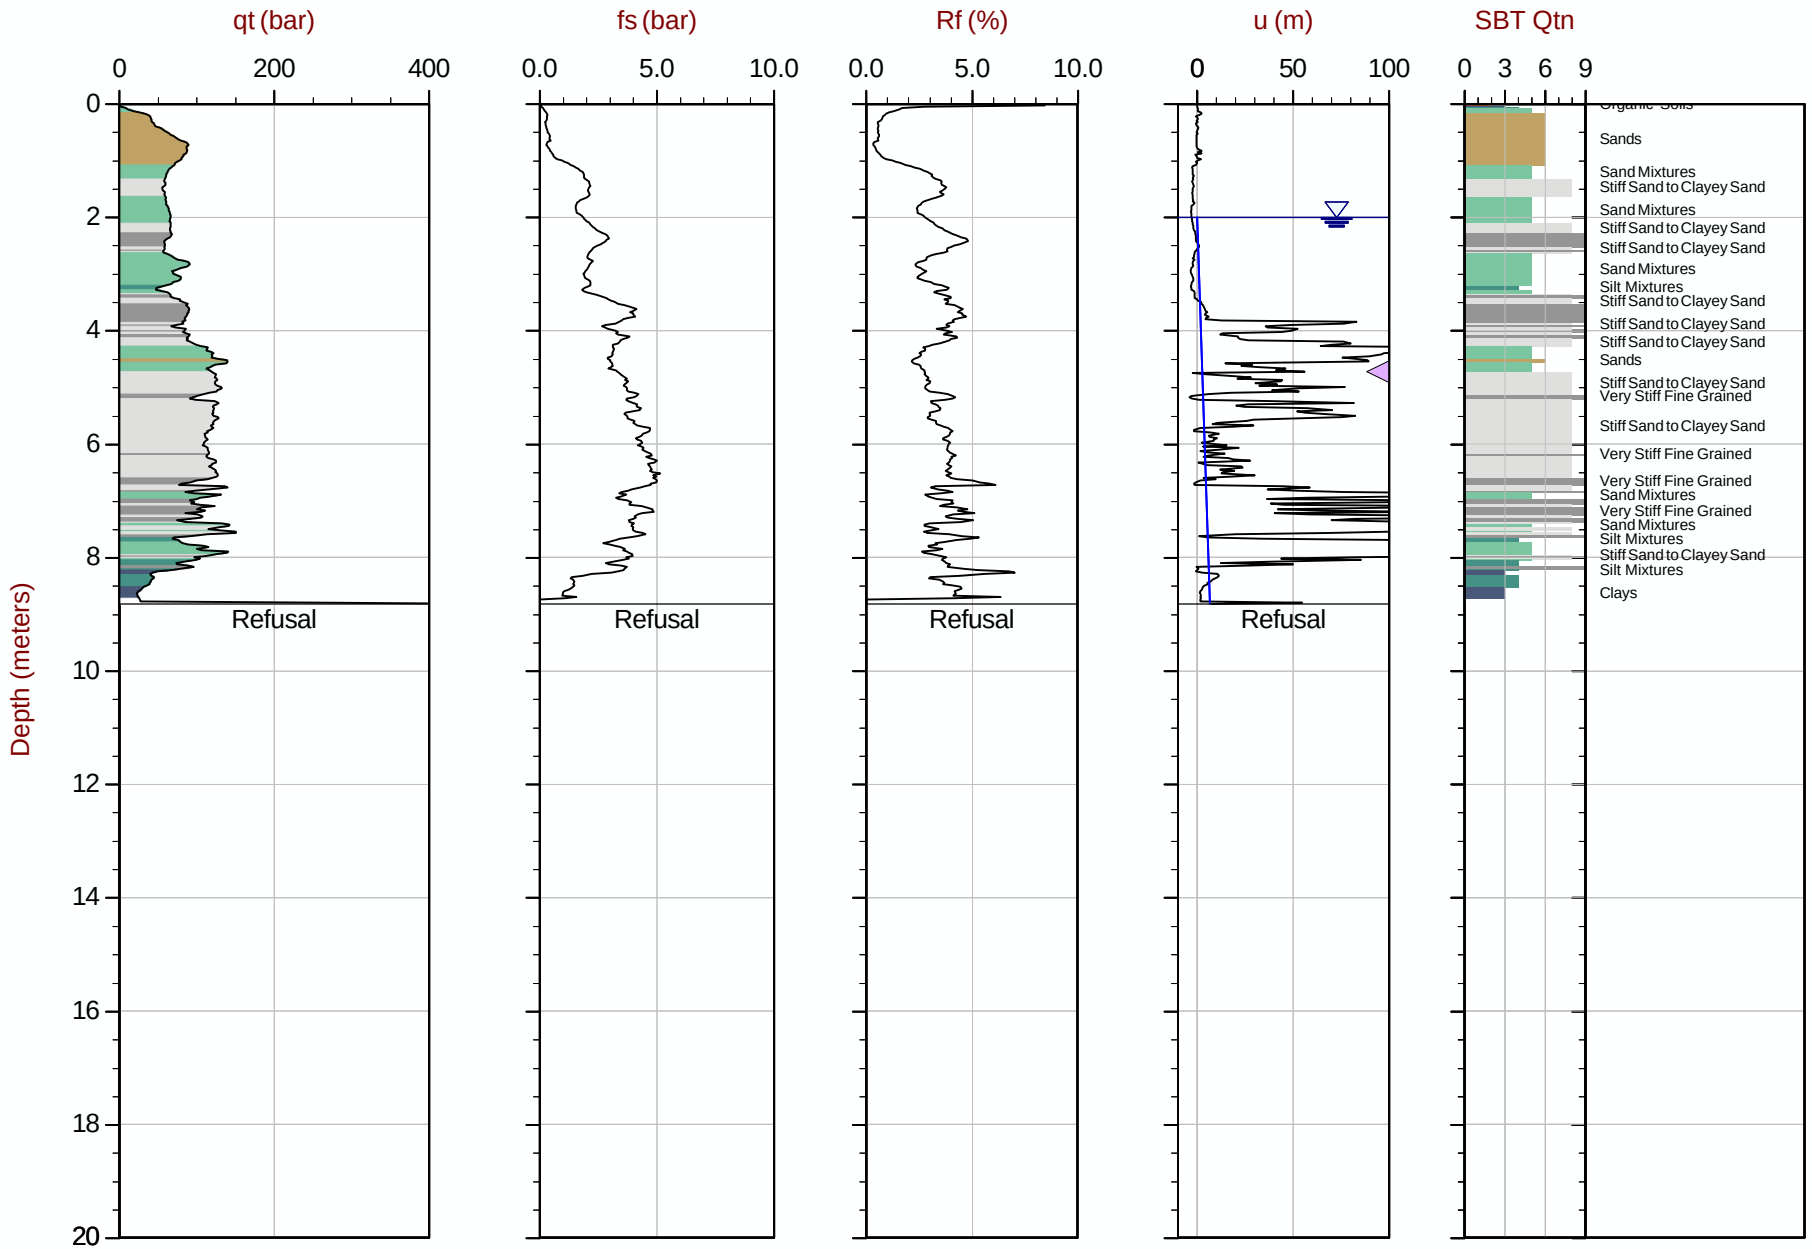

Max Depth: 8.825 m / 28.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT158.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612590m E: 415411m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 12:12
Site: Brooks, Alberta

Sounding: RCPT22-22CPT160
Cone: 822:T1000F10U35 Area= 15cm2

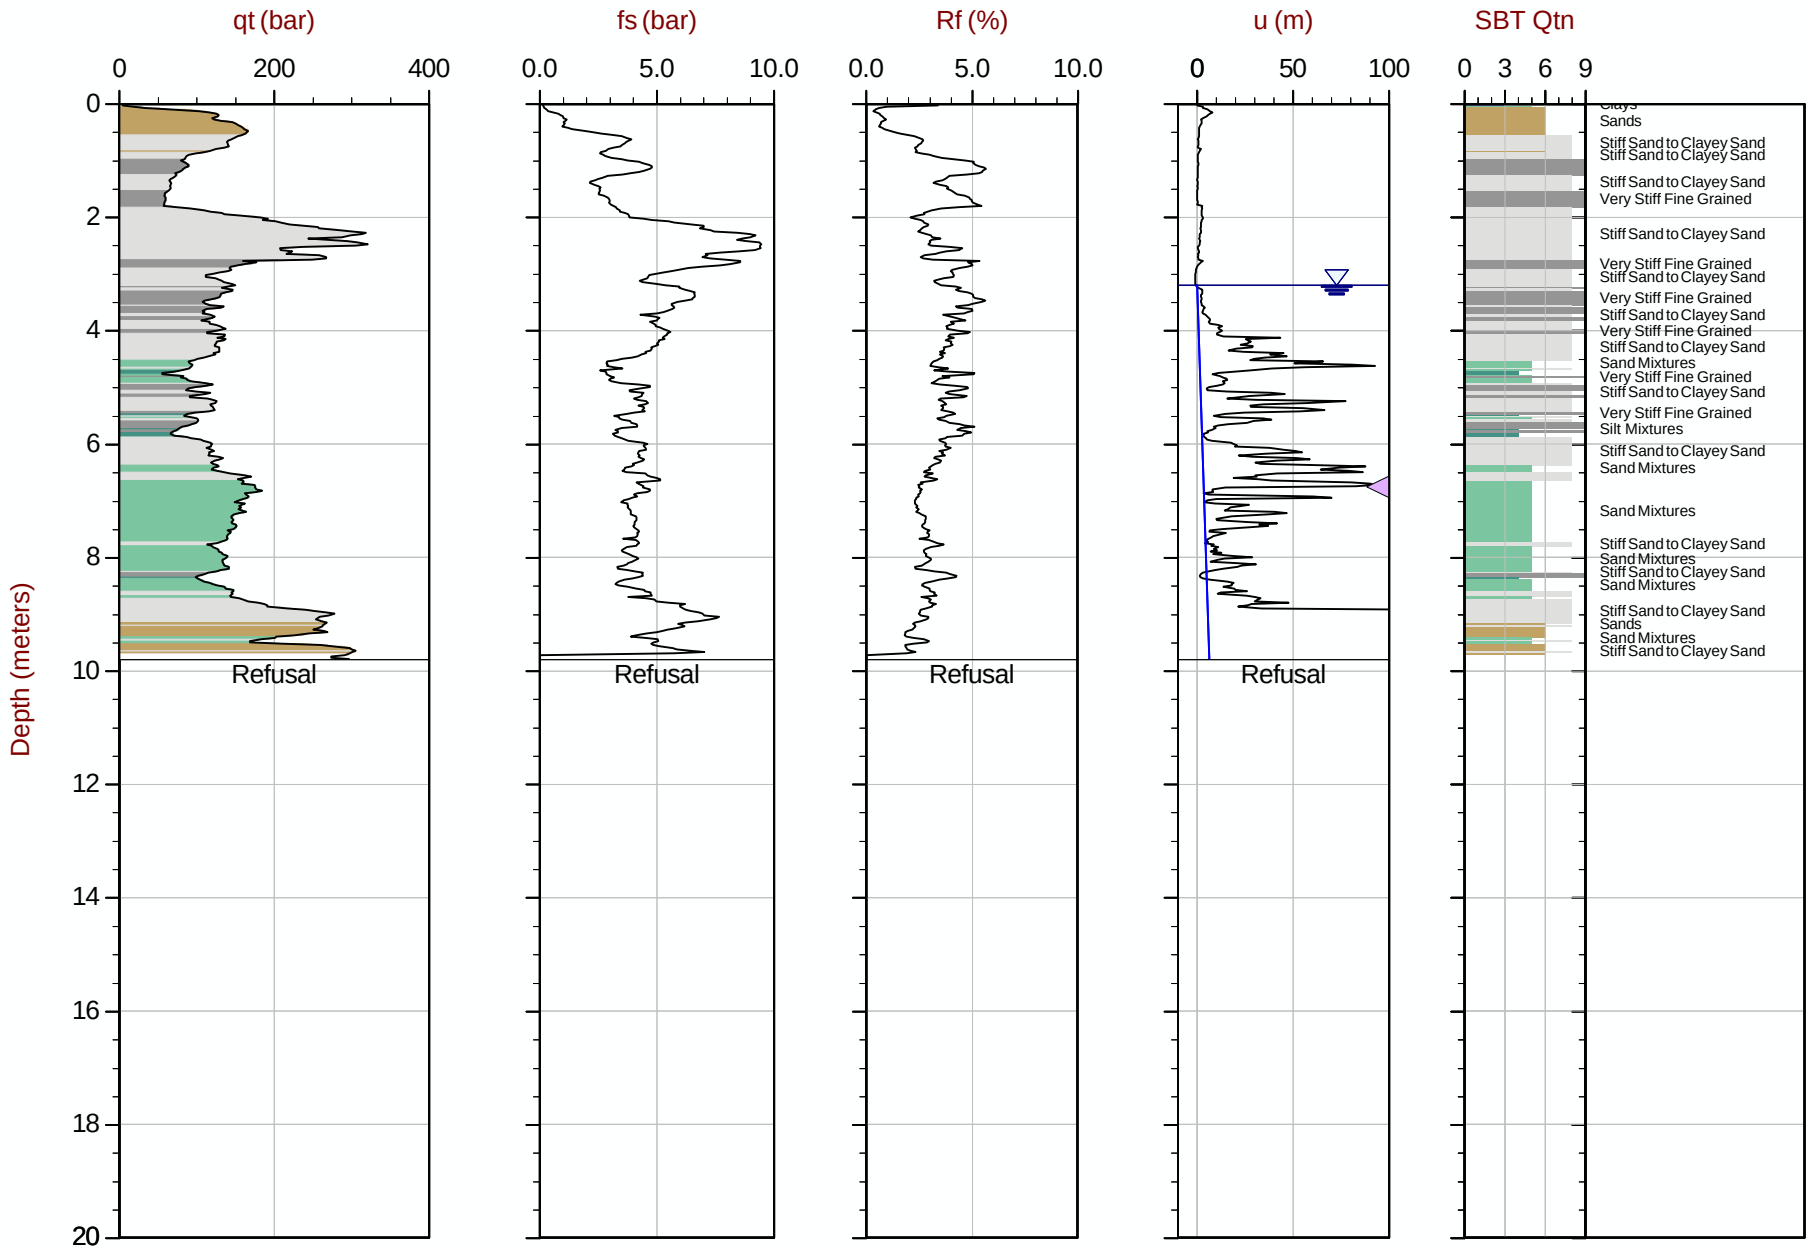

Max Depth: 9.800 m / 32.15 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT160.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612584m E: 415609m Elev: 771.024m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 13:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161
Cone: 750:T1500F15U35 Area= 15cm2

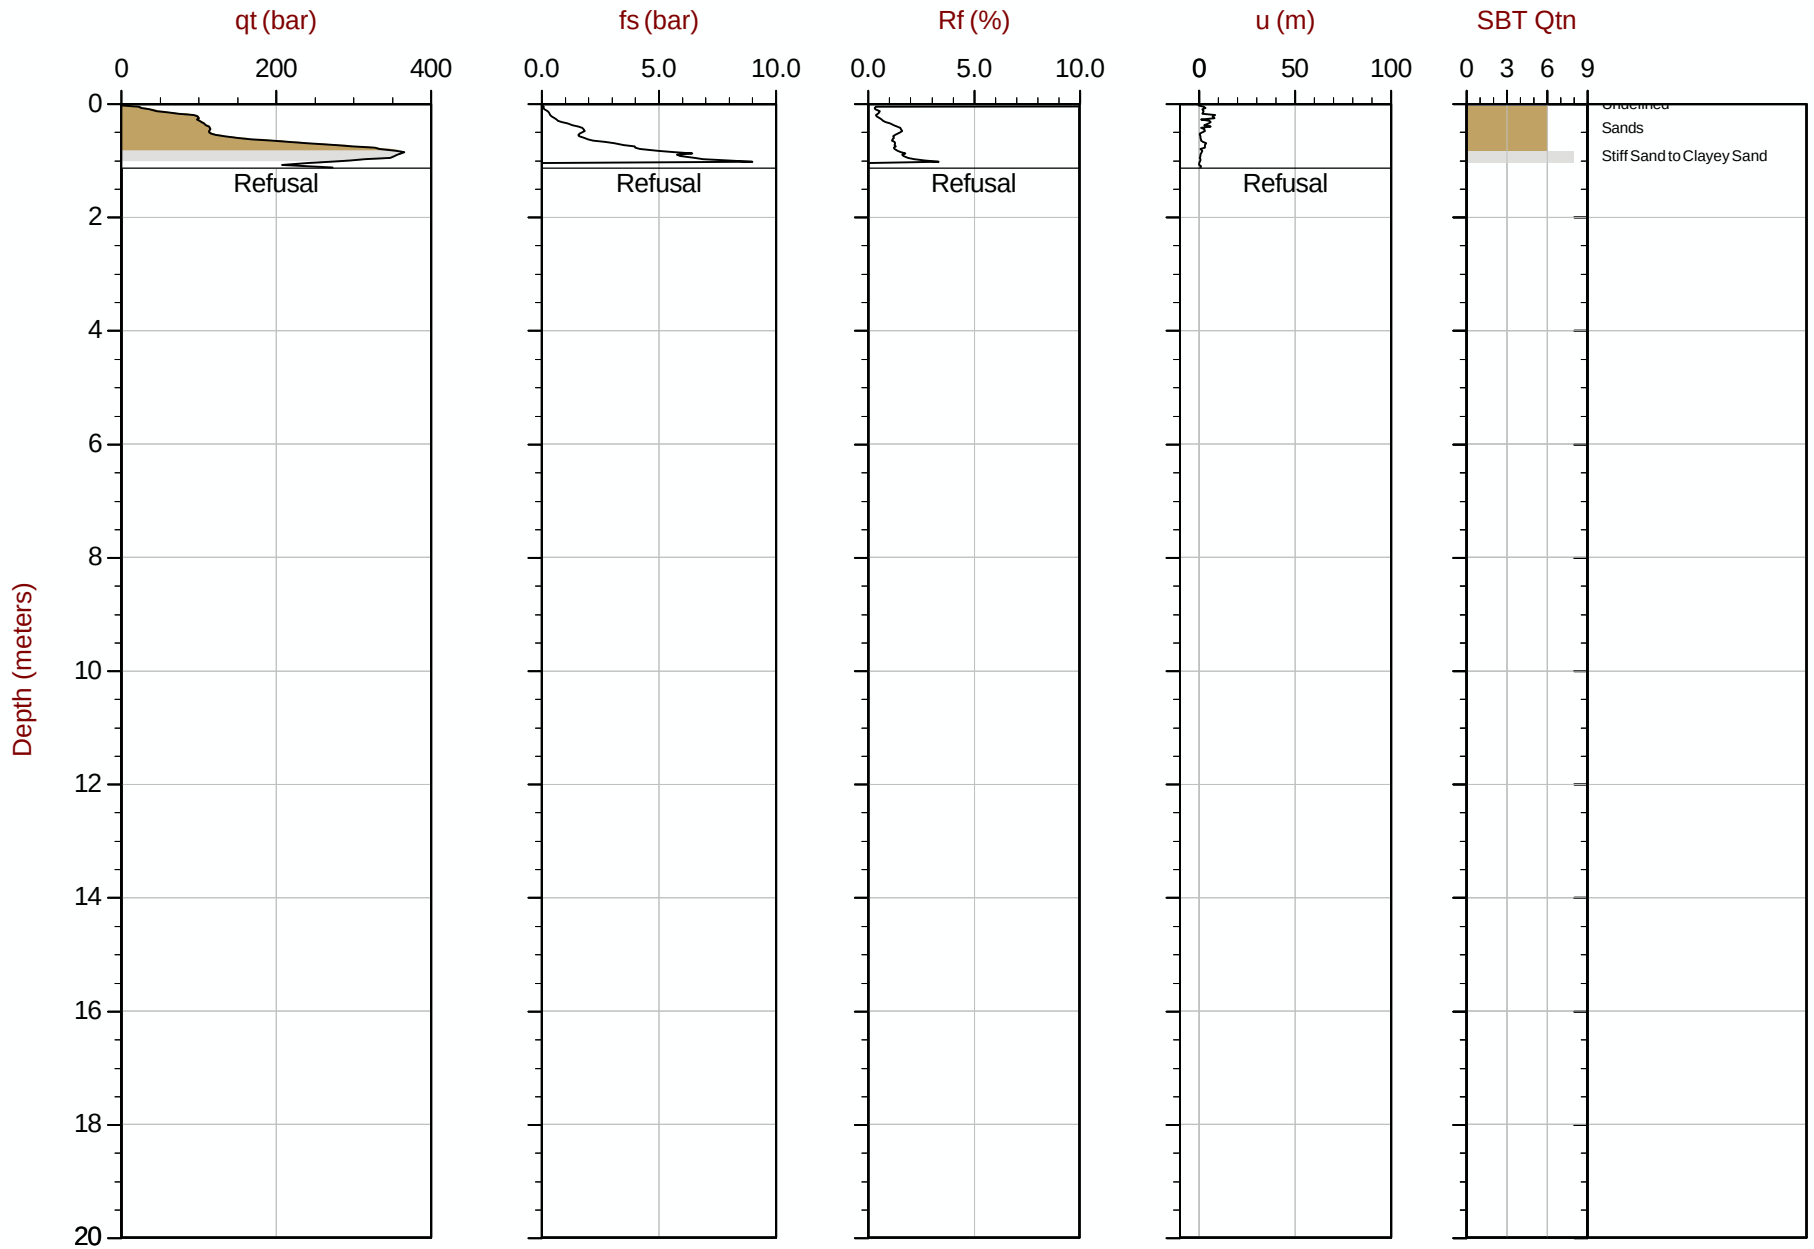

Max Depth: 1.125 m / 3.69 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT161.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612582m E: 415708m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 13:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161A
Cone: 750:T1500F15U35 Area= 15cm2

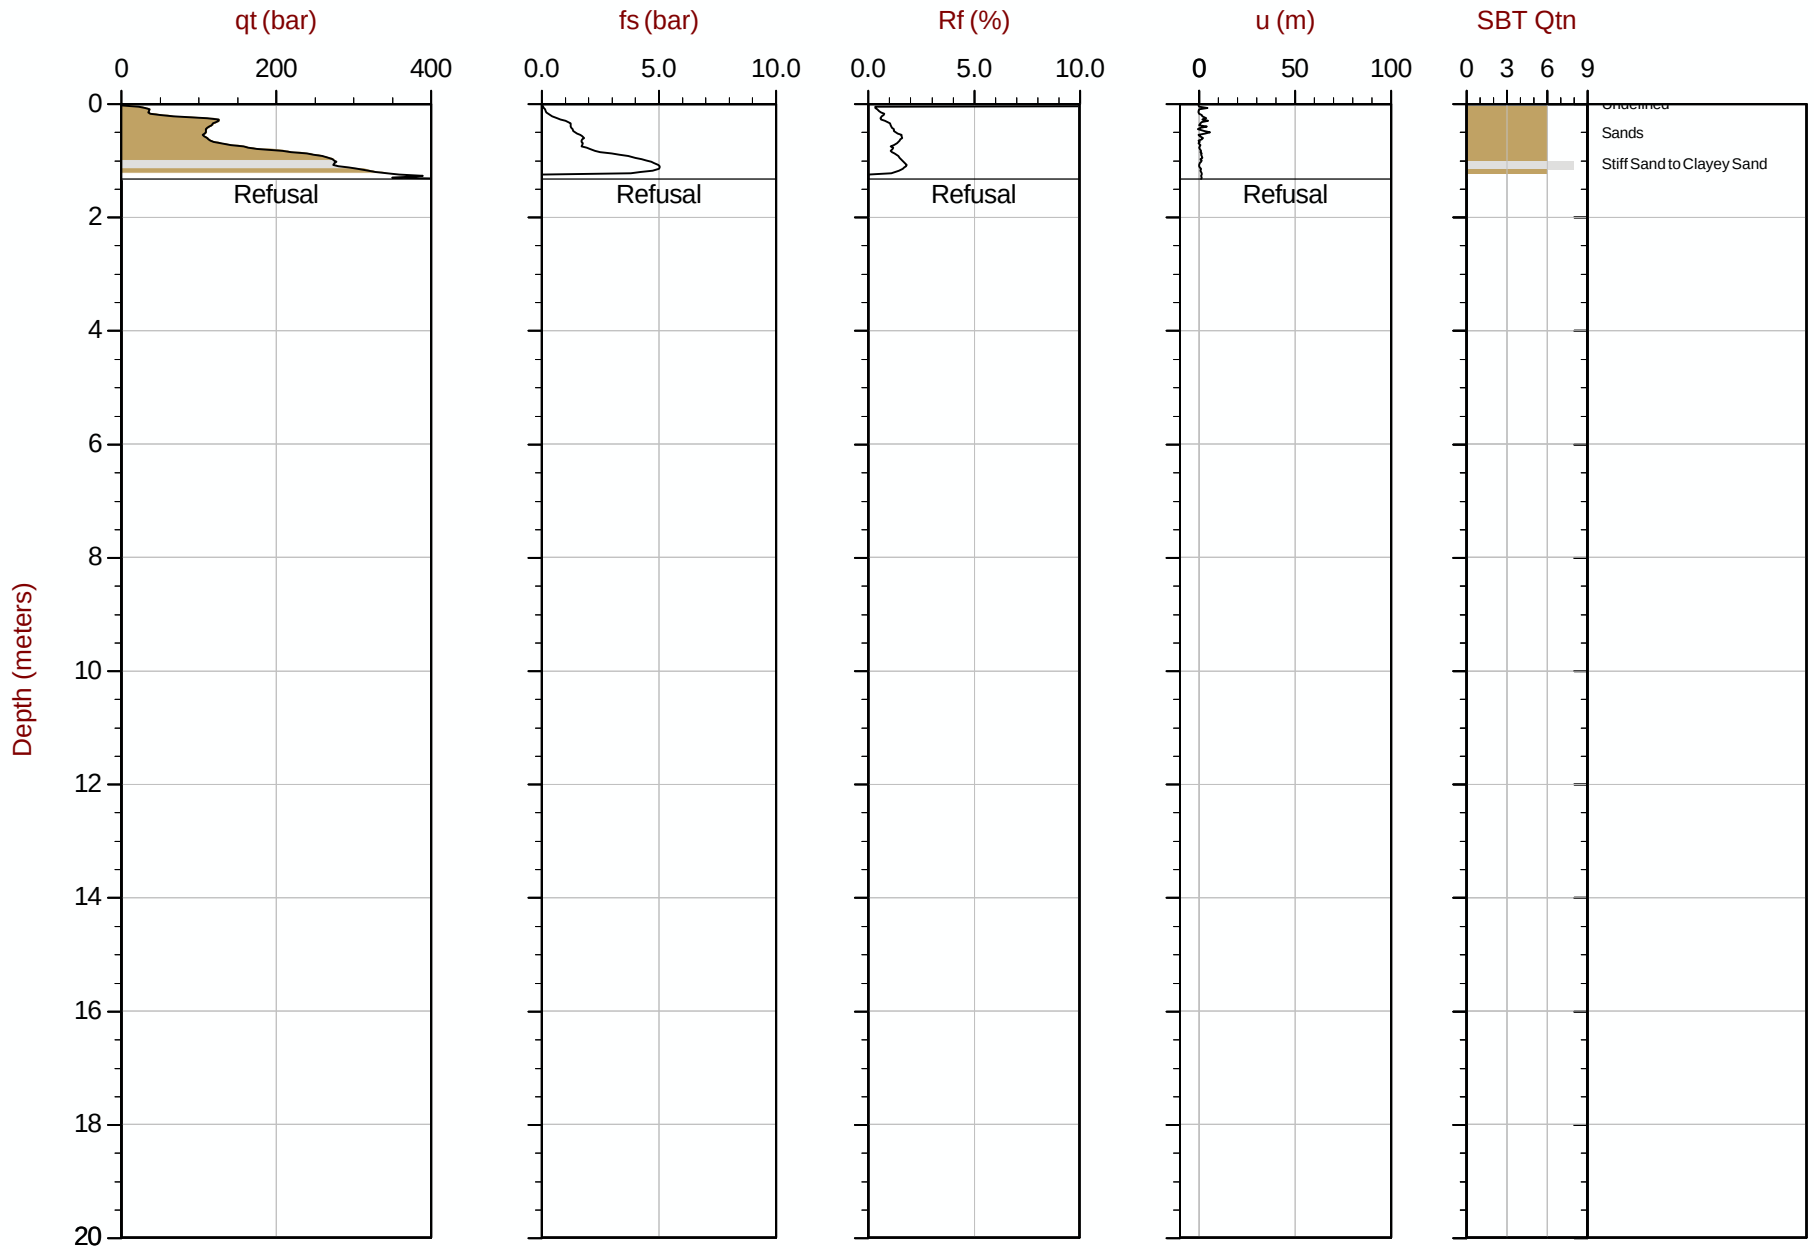

Max Depth: 1.325 m / 4.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT161A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612582m E: 415708m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 14:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161B
Cone: 750:T1500F15U35 Area= 15cm2

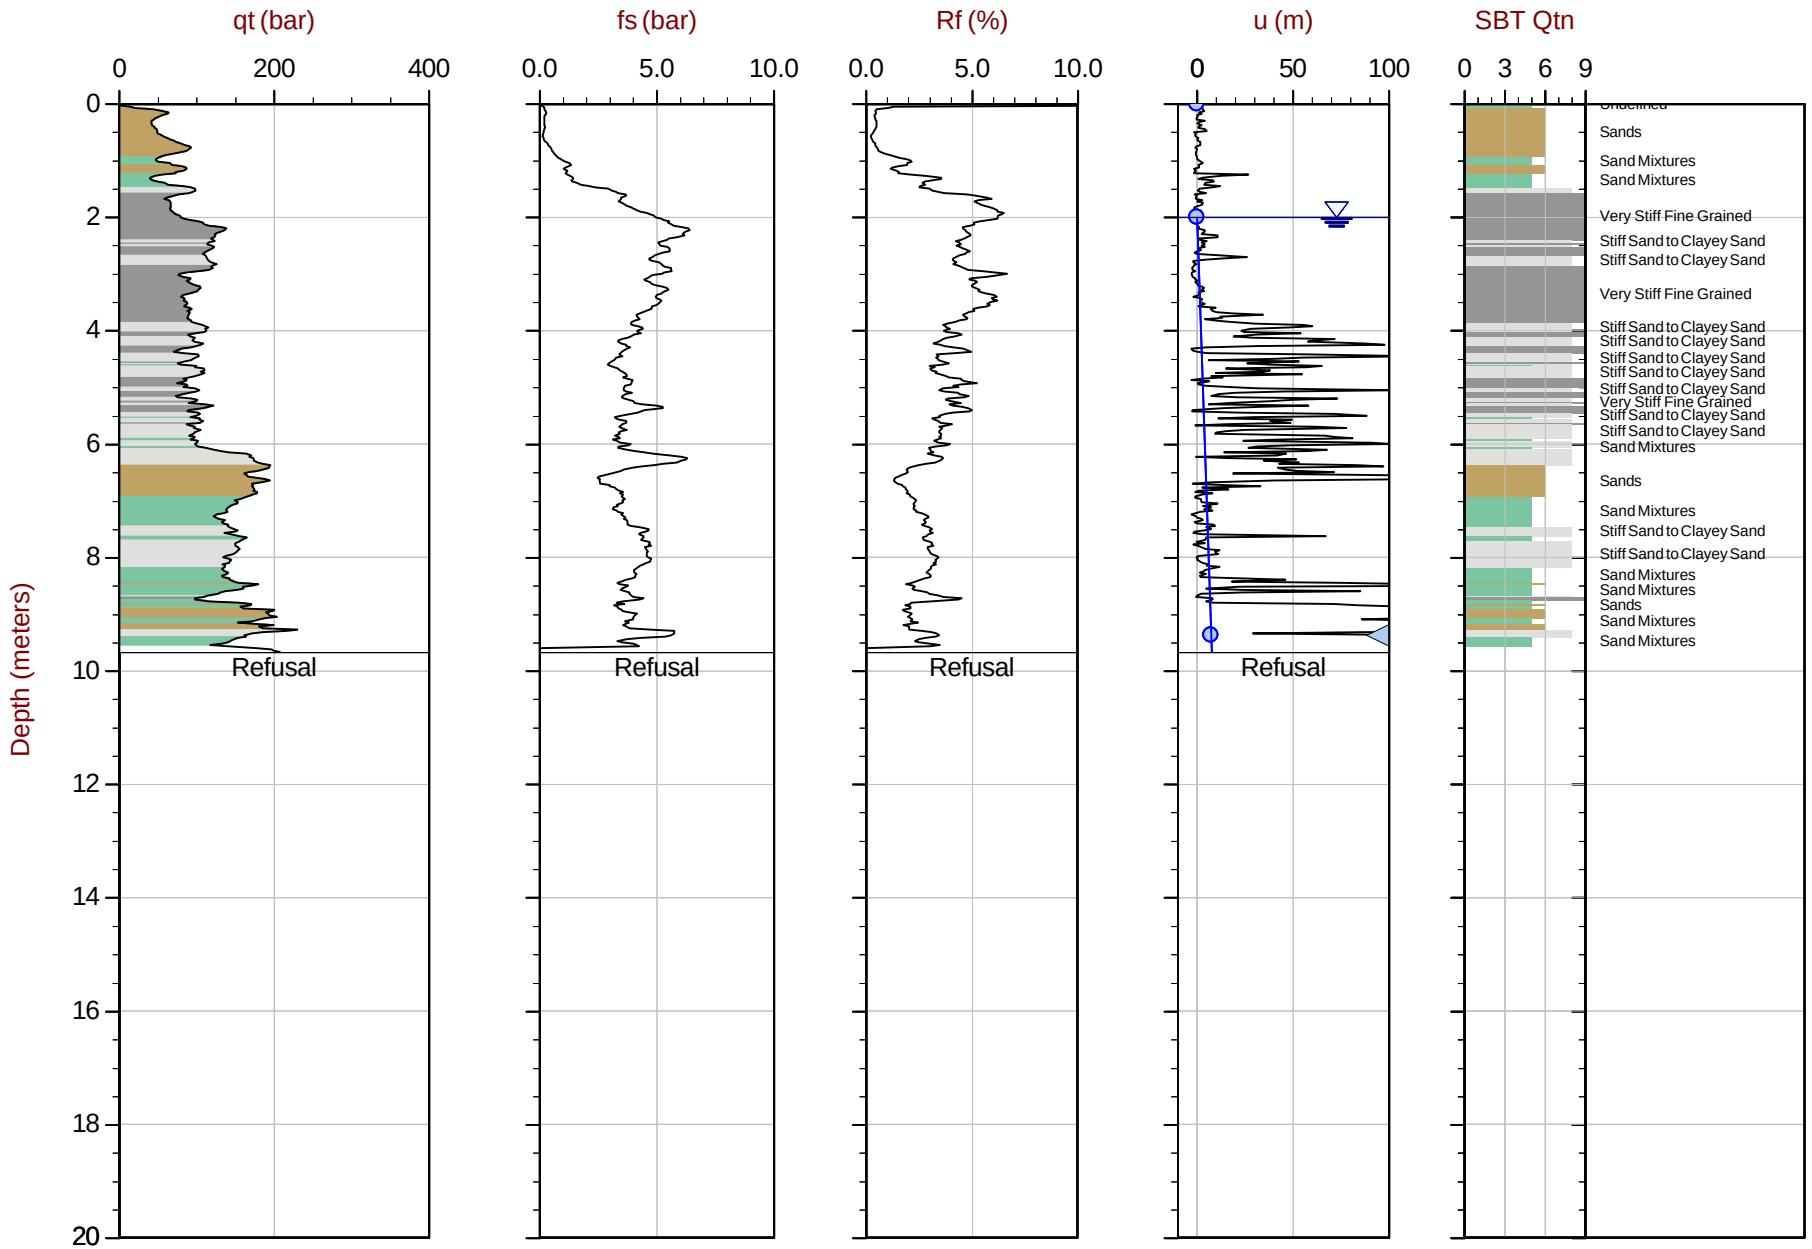

Max Depth: 9.675 m / 31.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT161B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612582m E: 415708m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 10:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT162
Cone: 750:T1500F15U35 Area= 15cm2

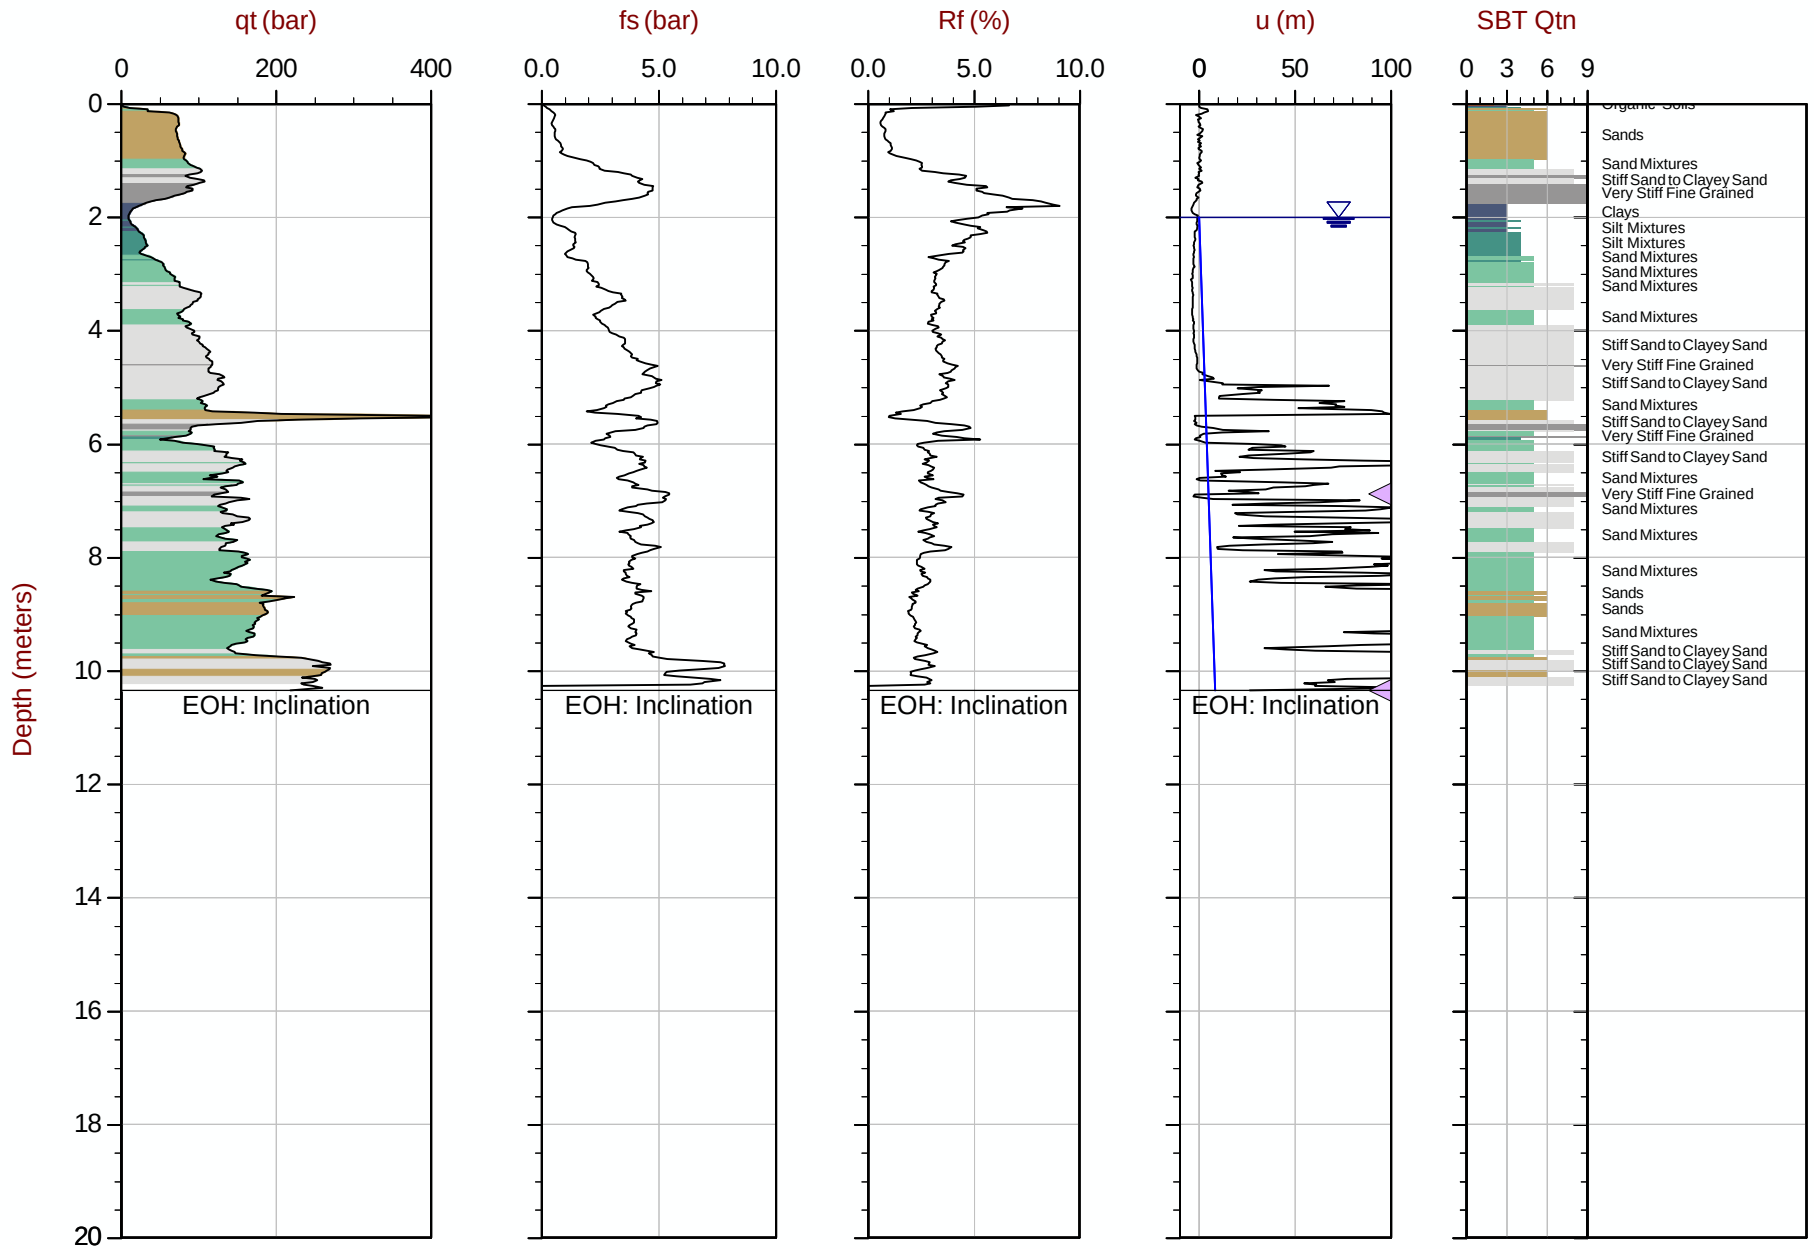

Max Depth: 10.350 m / 33.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT162.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612580m E: 415808m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 06:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT163
Cone: 821:T1000F10U35 Area= 15cm2

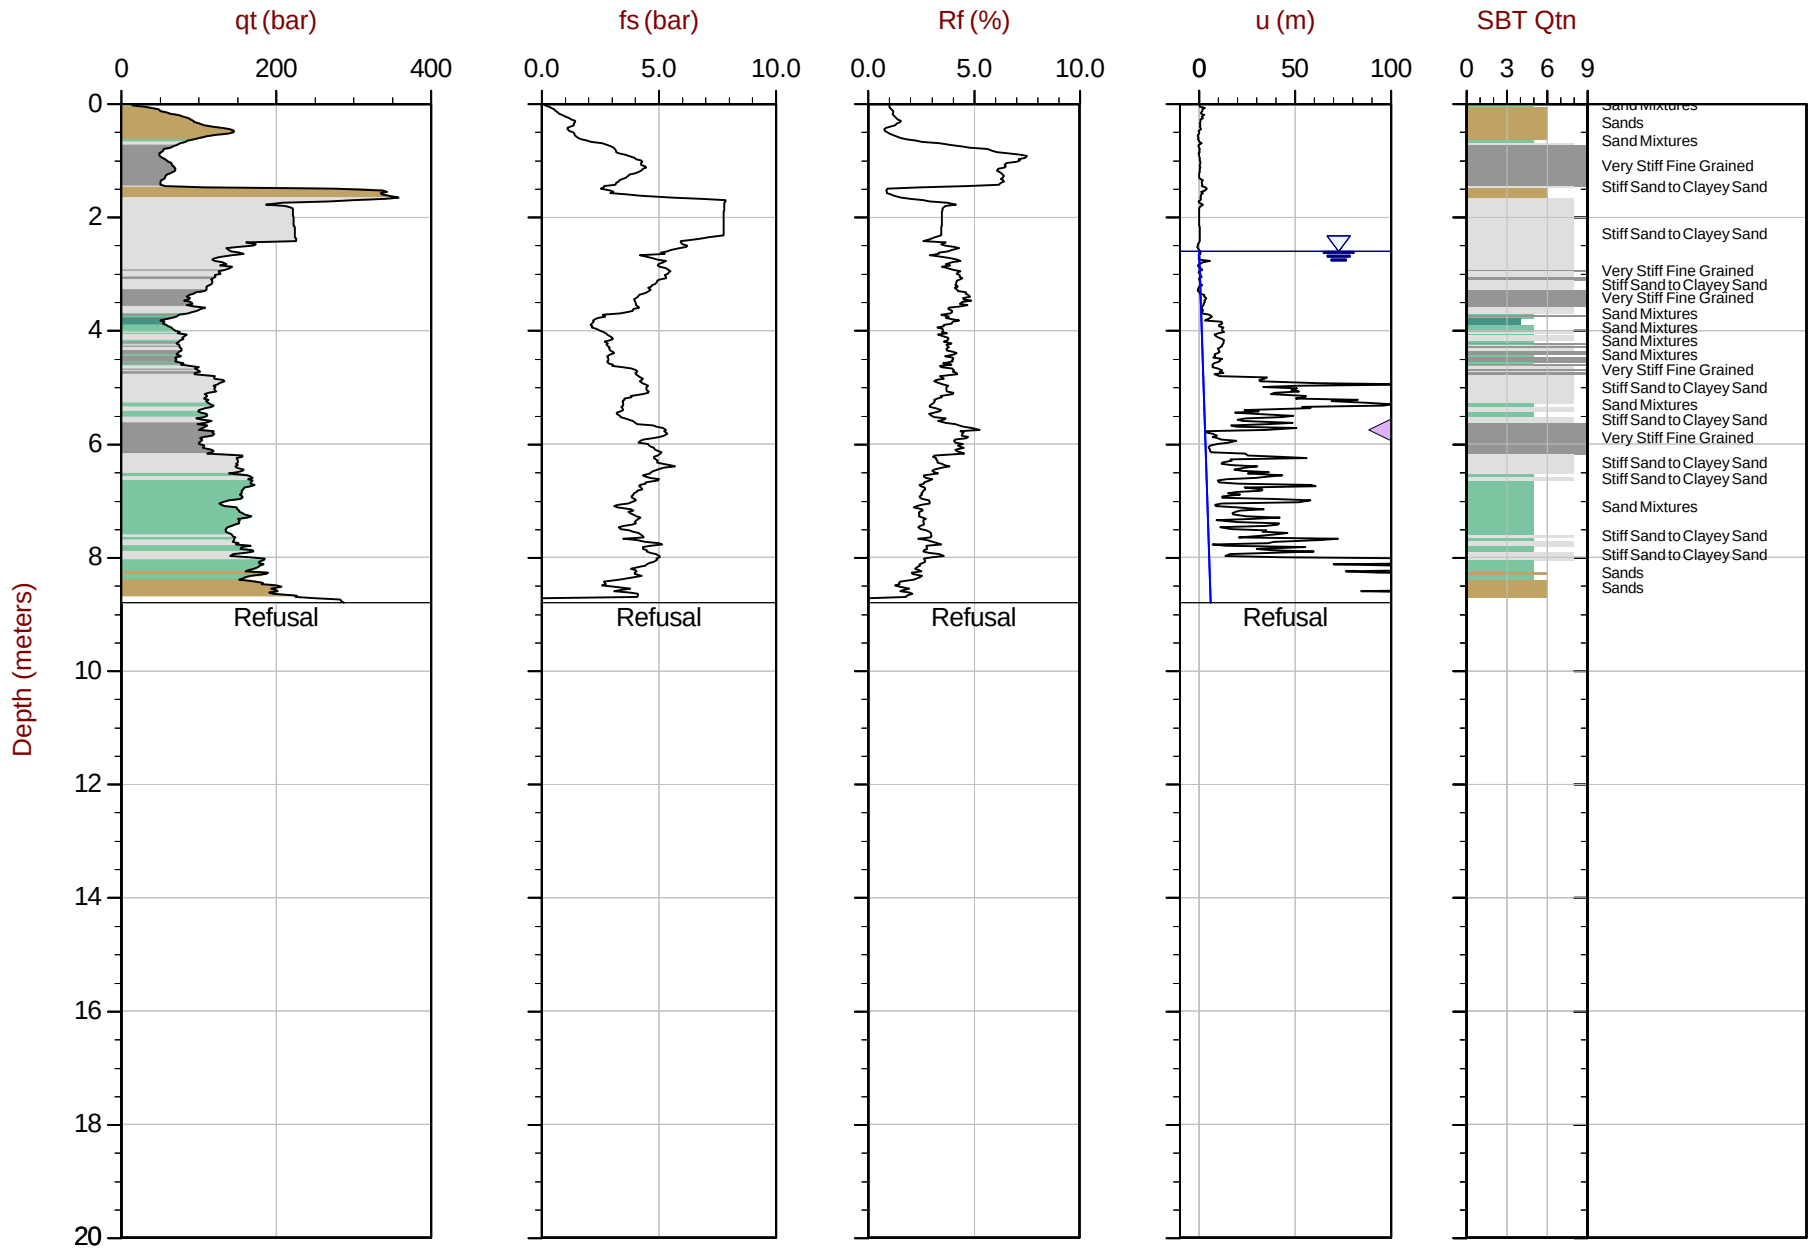

Max Depth: 8.800 m / 28.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT163.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612581m E: 415908m Elev: 769.201m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 15:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT164
Cone: 750:T1500F15U35 Area= 15cm2

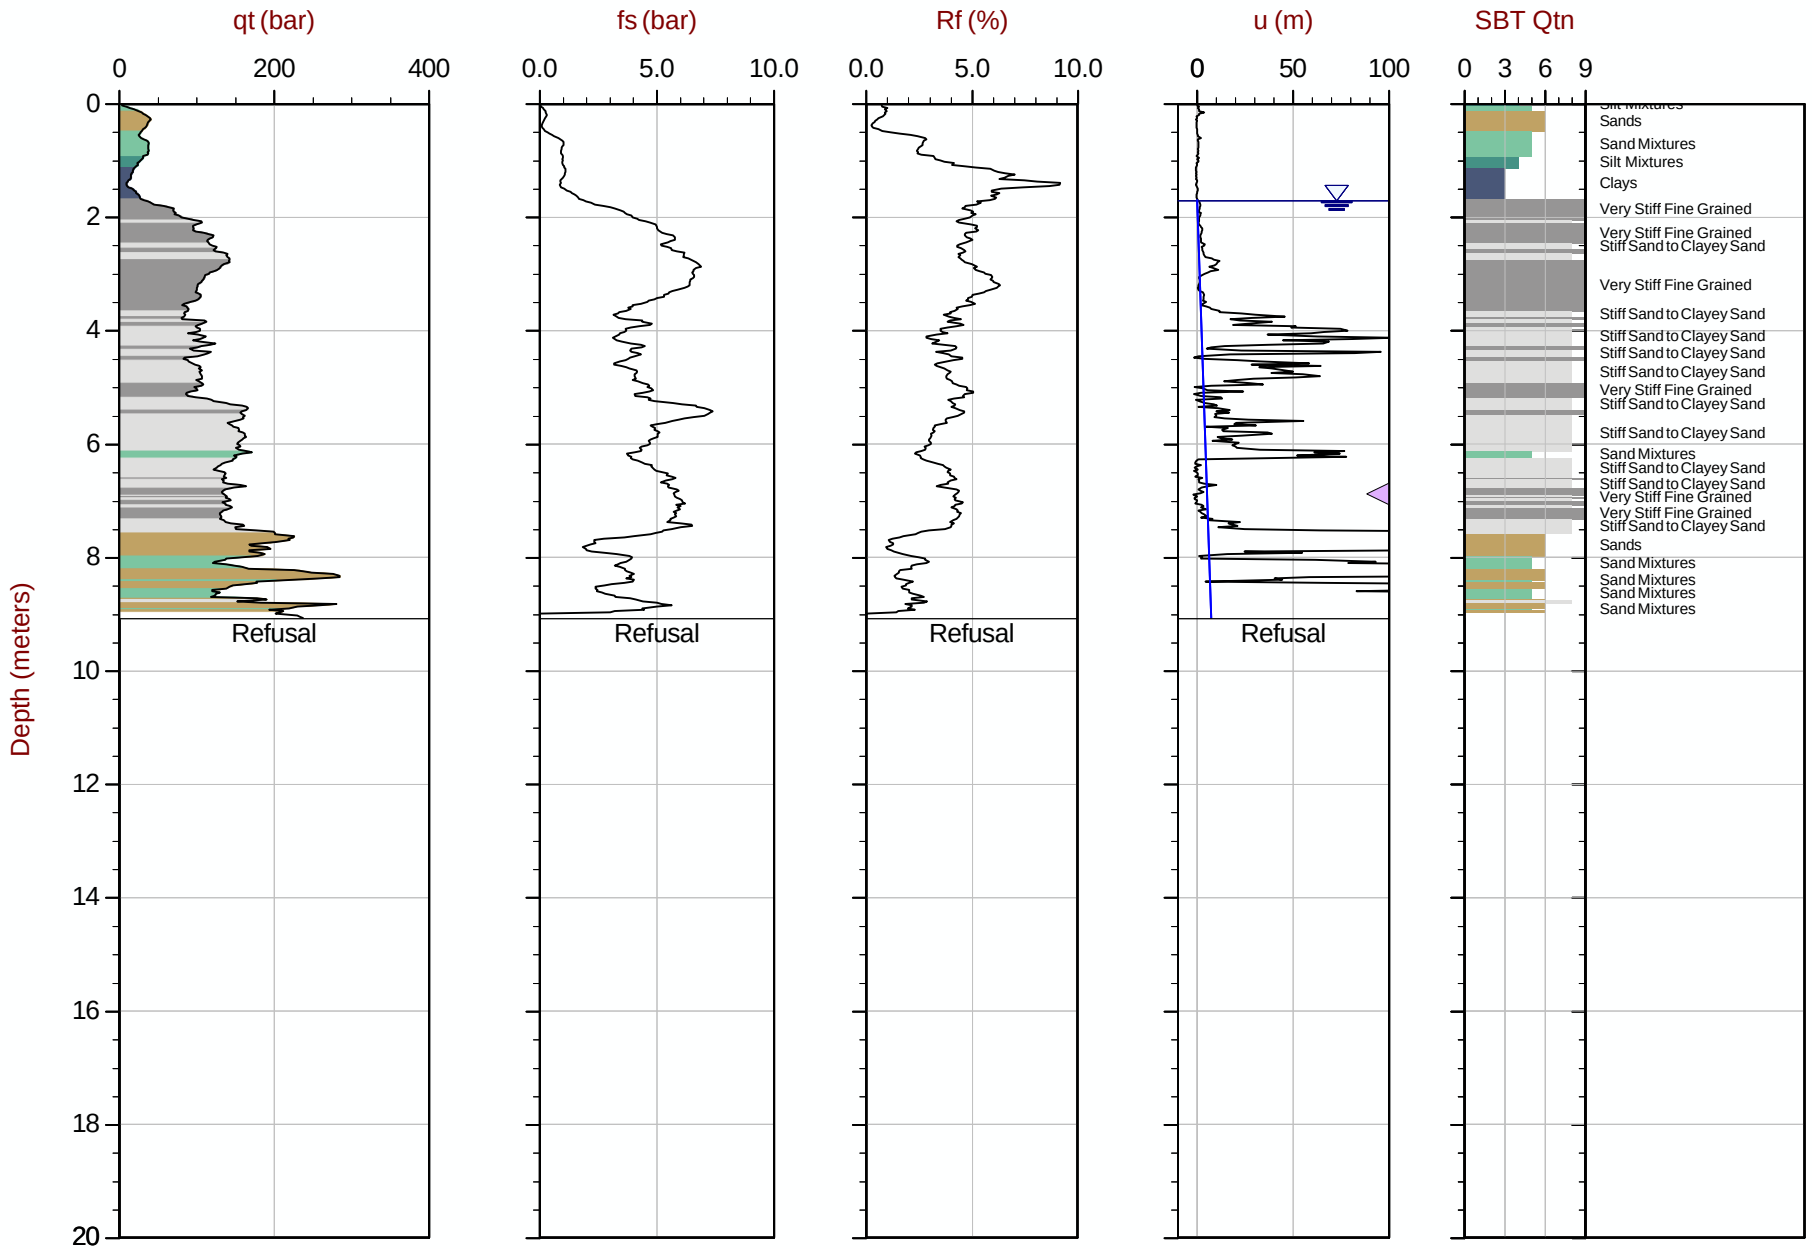

Max Depth: 9.075 m / 29.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT164.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612579m E: 416008m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 15:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT165
Cone: 821:T1000F10U35 Area= 15cm2

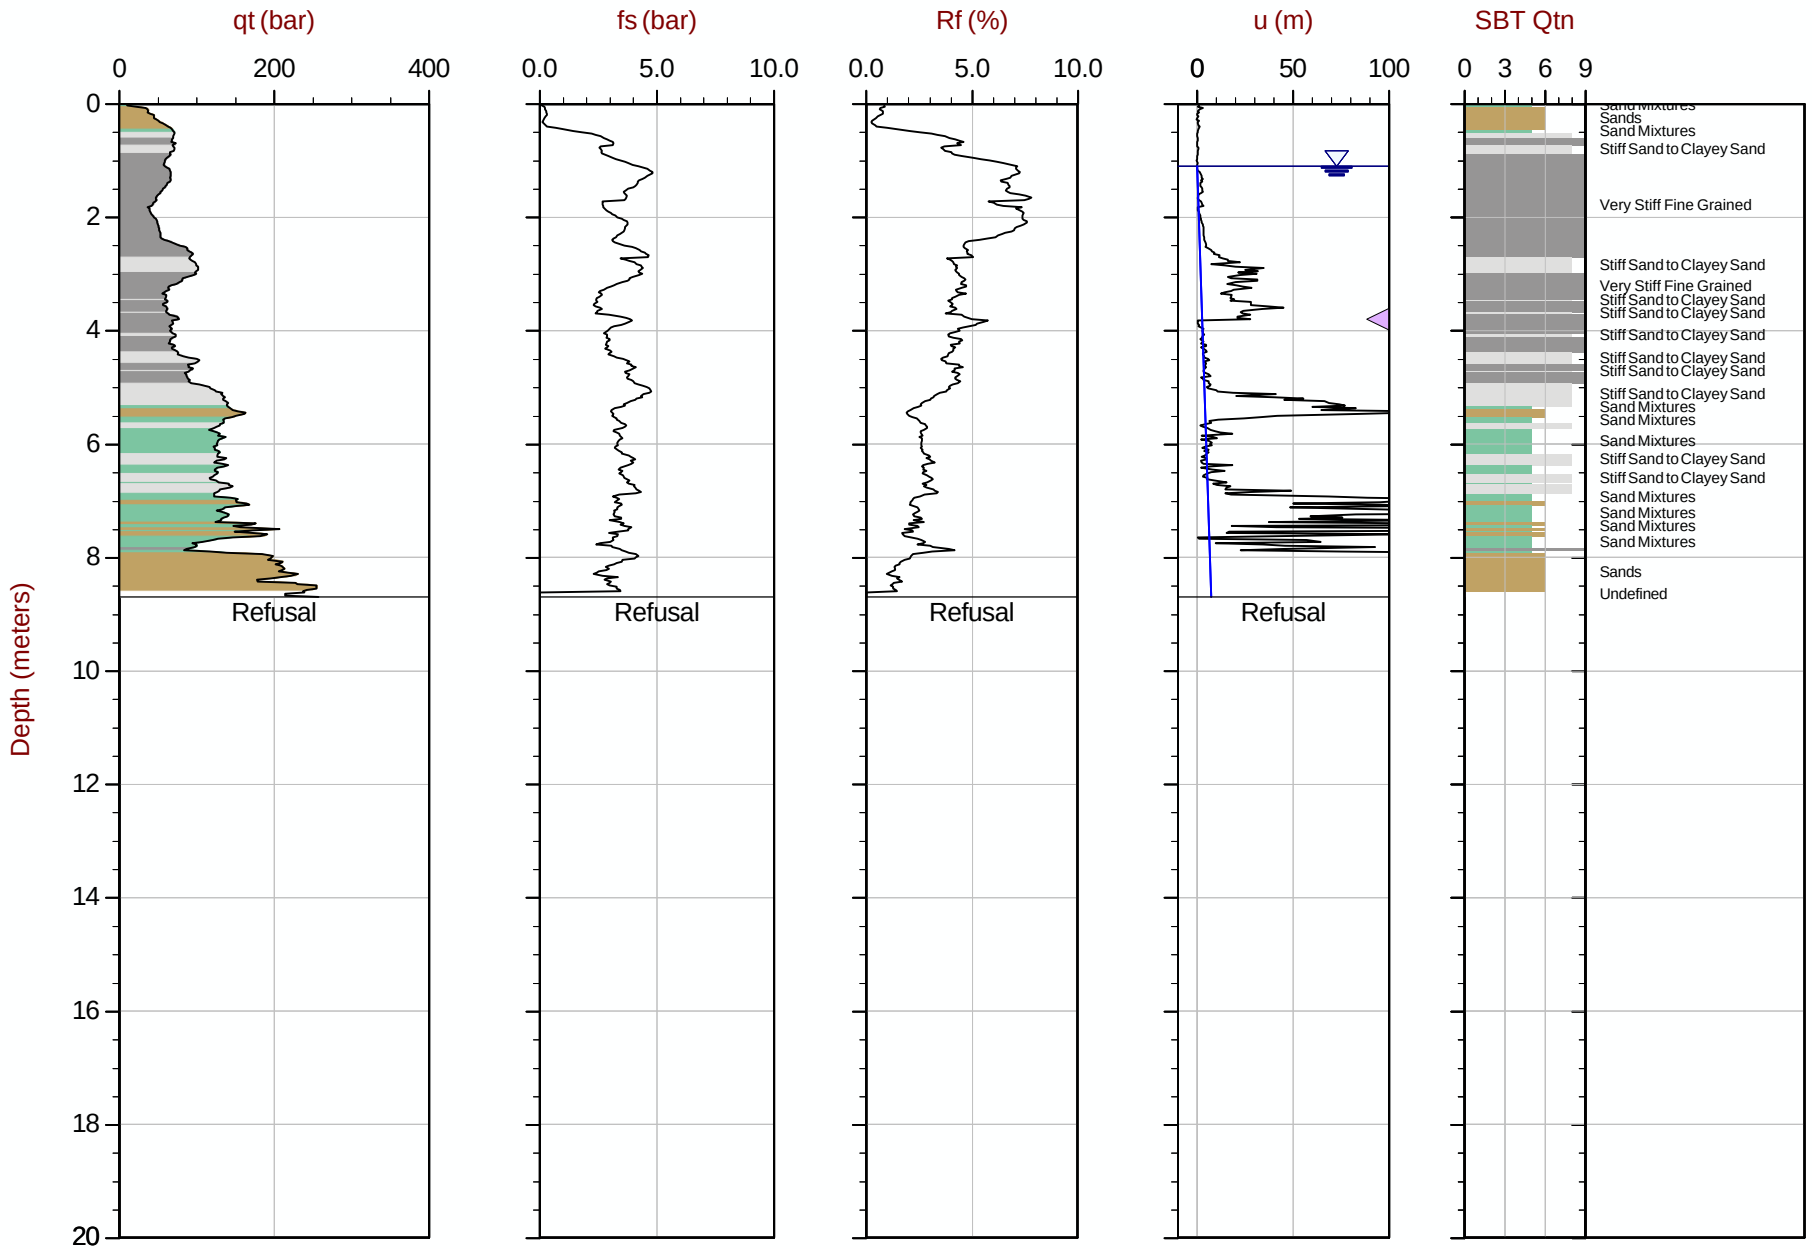

Max Depth: 8.700 m / 28.54 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT165.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612573m E: 416108m Elev: 769.874m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT166
Cone: 750:T1500F15U35 Area= 15cm2

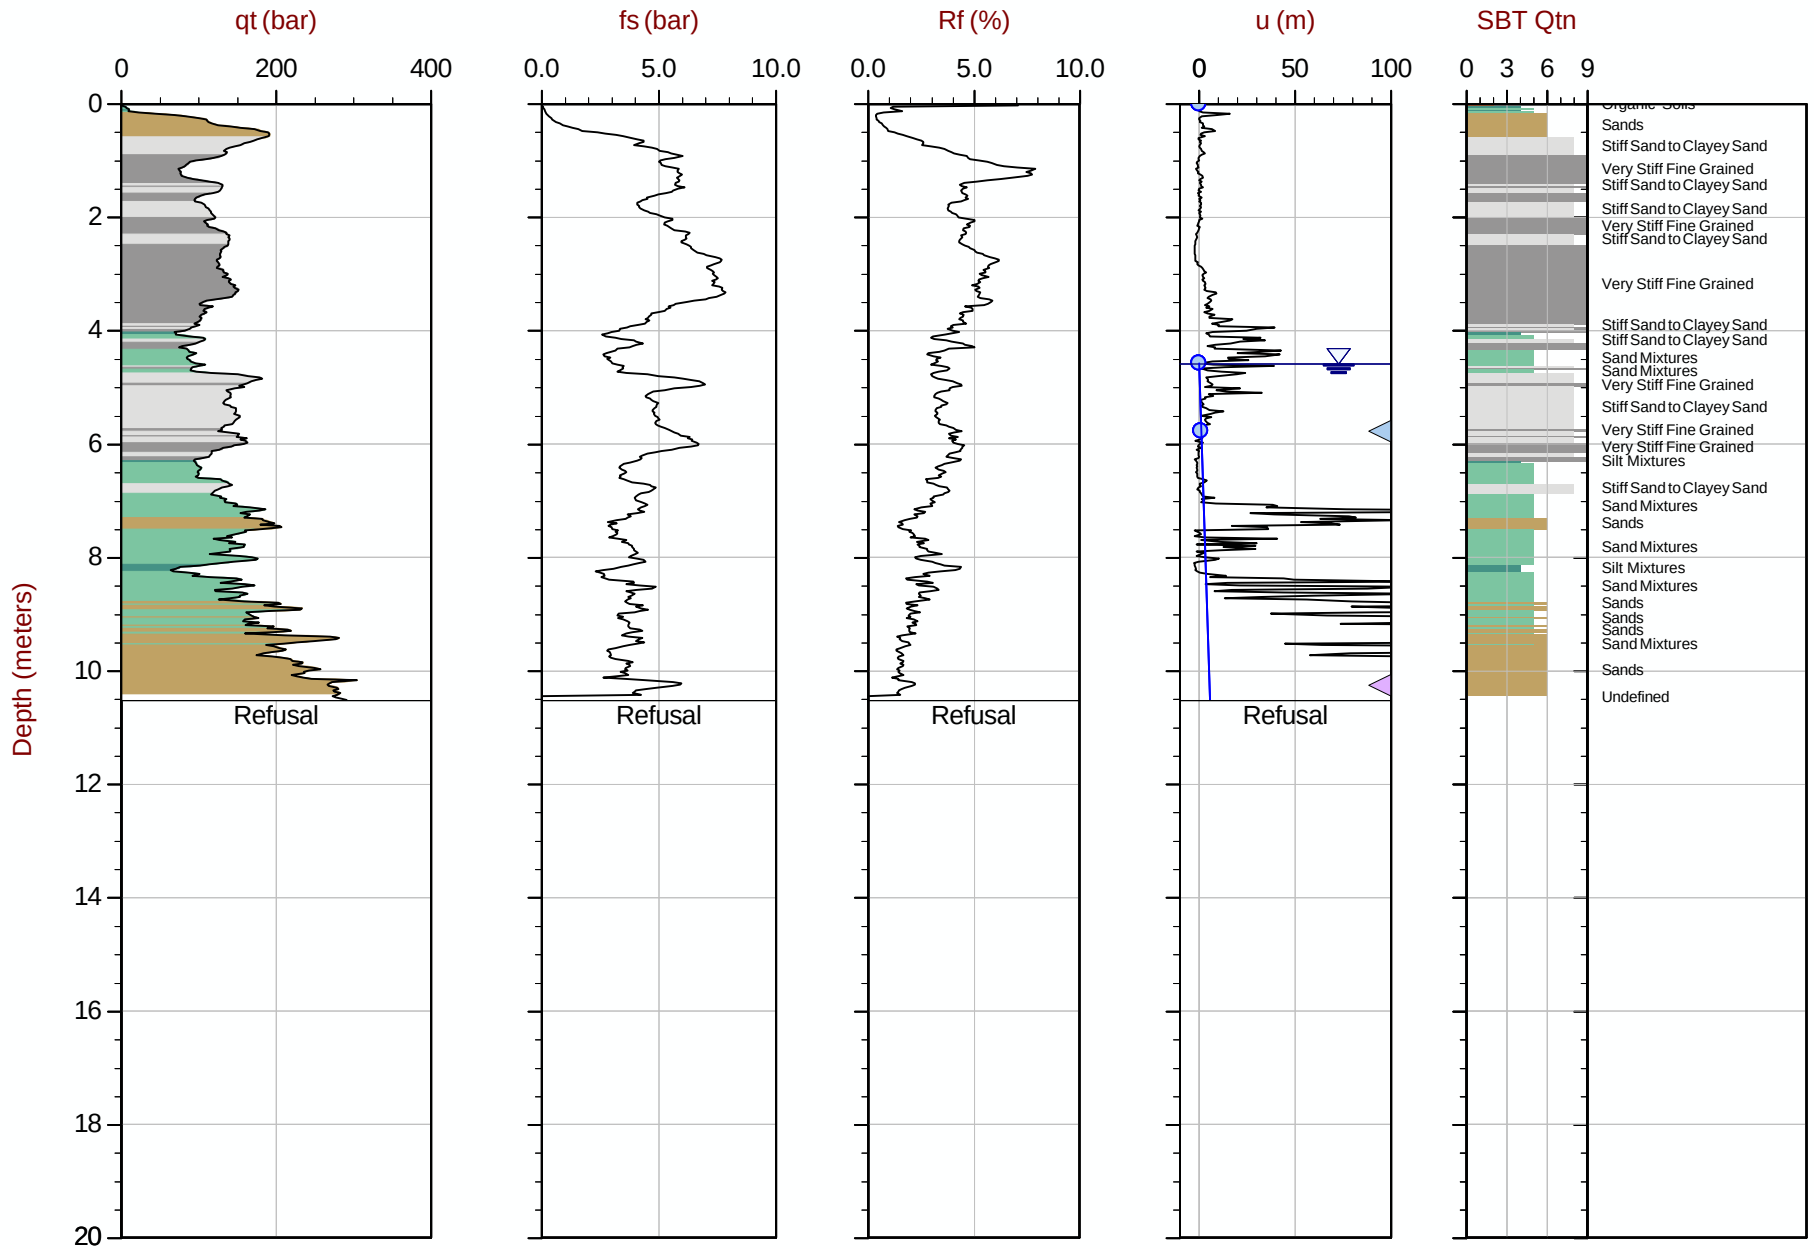

Max Depth: 10.525 m / 34.53 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT166.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612572m E: 416208m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 13:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT167
Cone: 854:T1500F15U35 Area= 15cm2

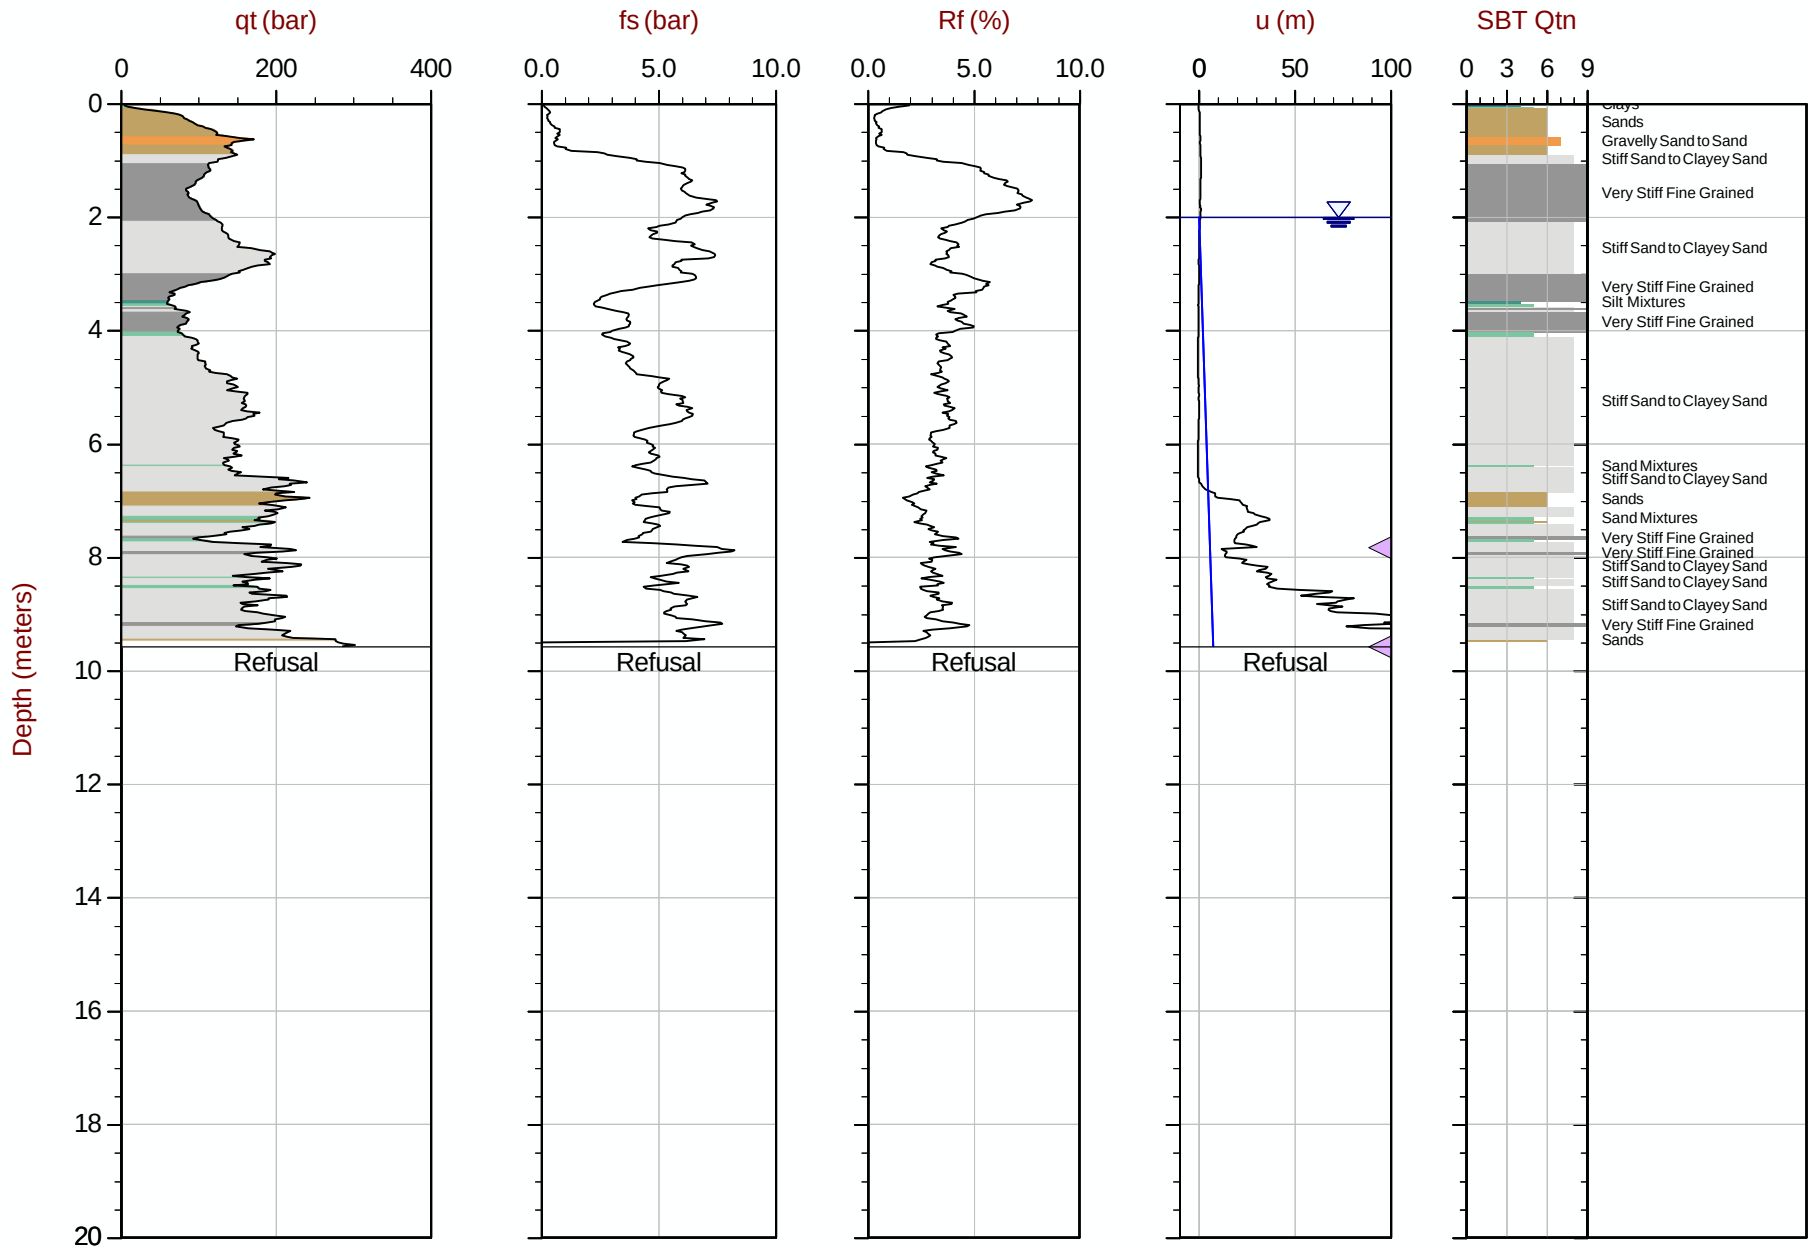

Max Depth: 9.575 m / 31.41 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT167.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612569m E: 416308m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 15:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT168
Cone: 854:T1500F15U35 Area= 15cm2

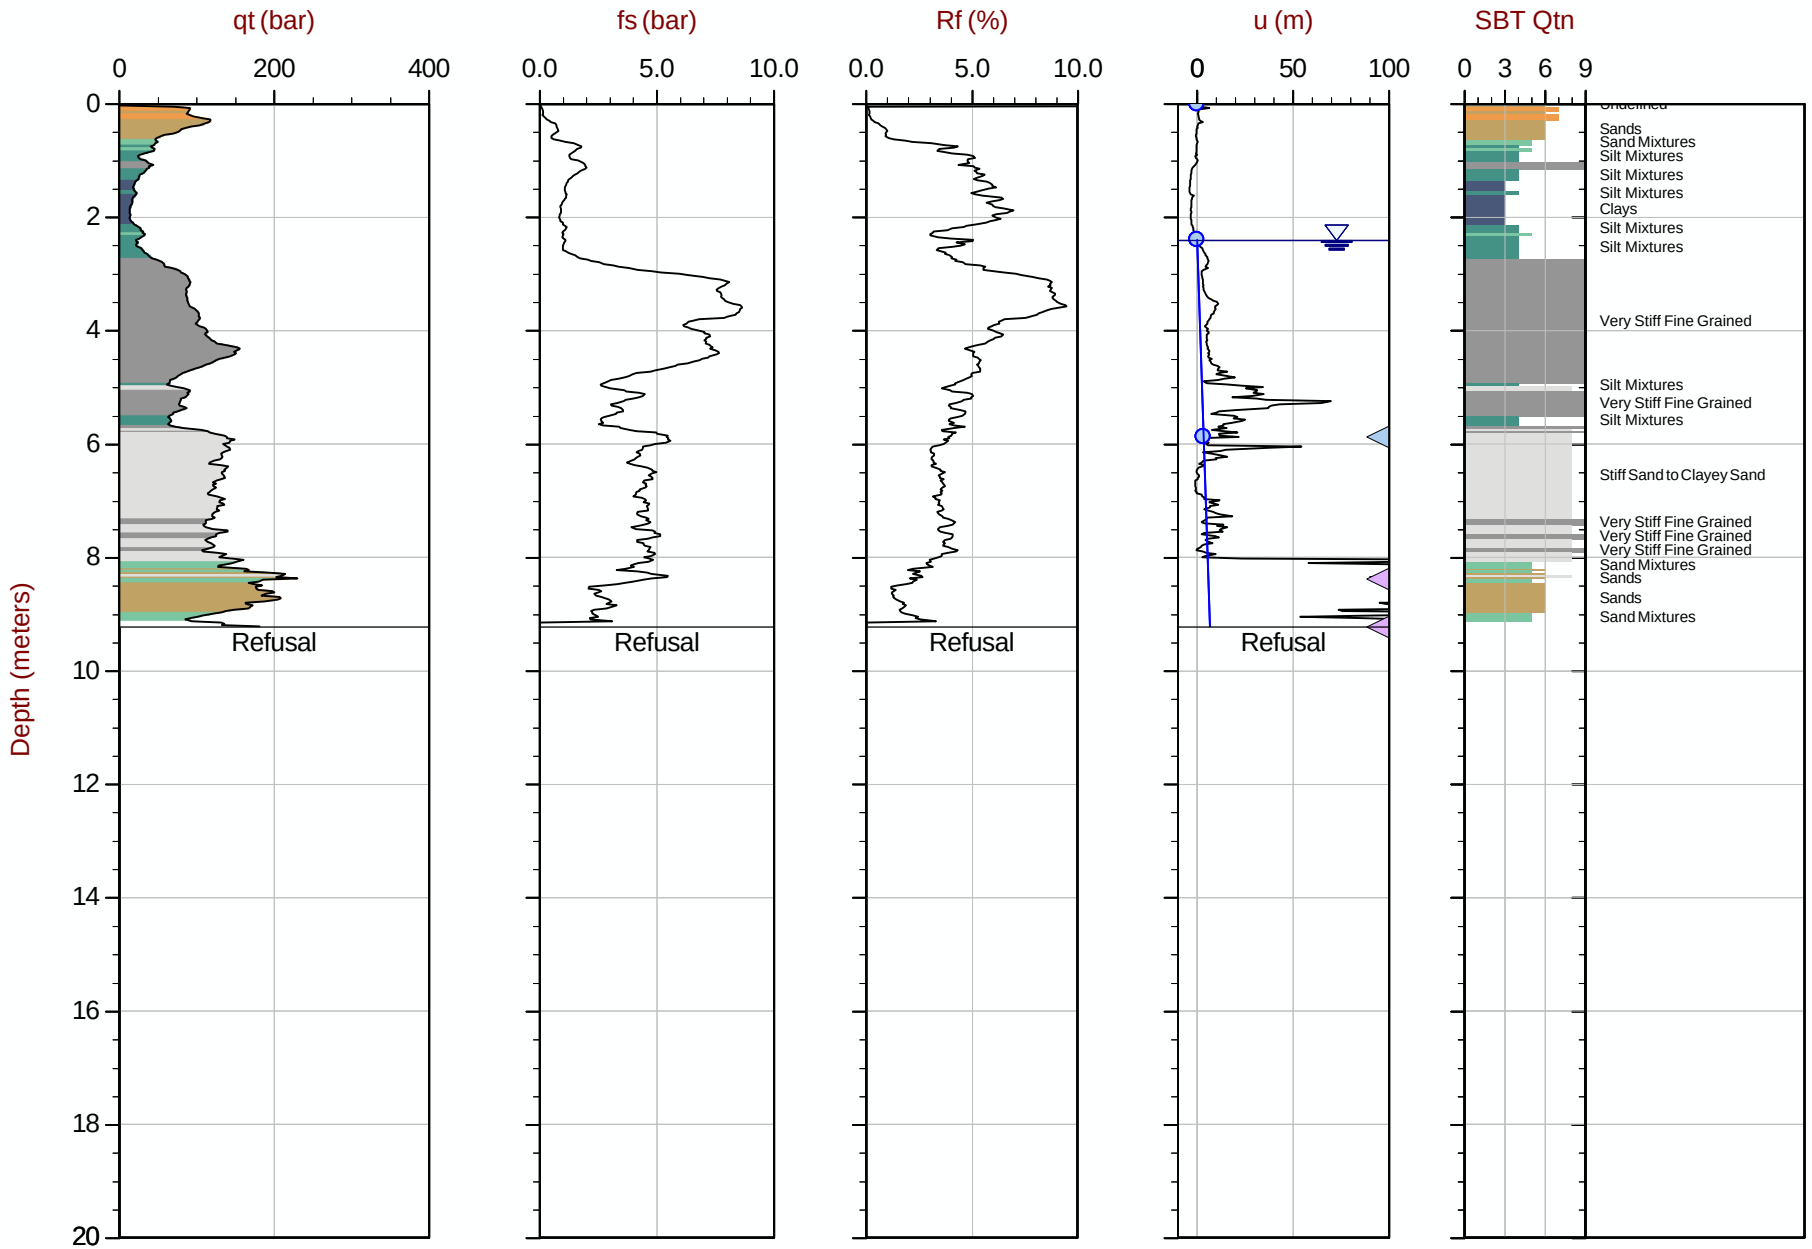

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT168.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612566m E: 416408m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 08:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT169
Cone: 854:T1500F15U35 Area= 15cm2

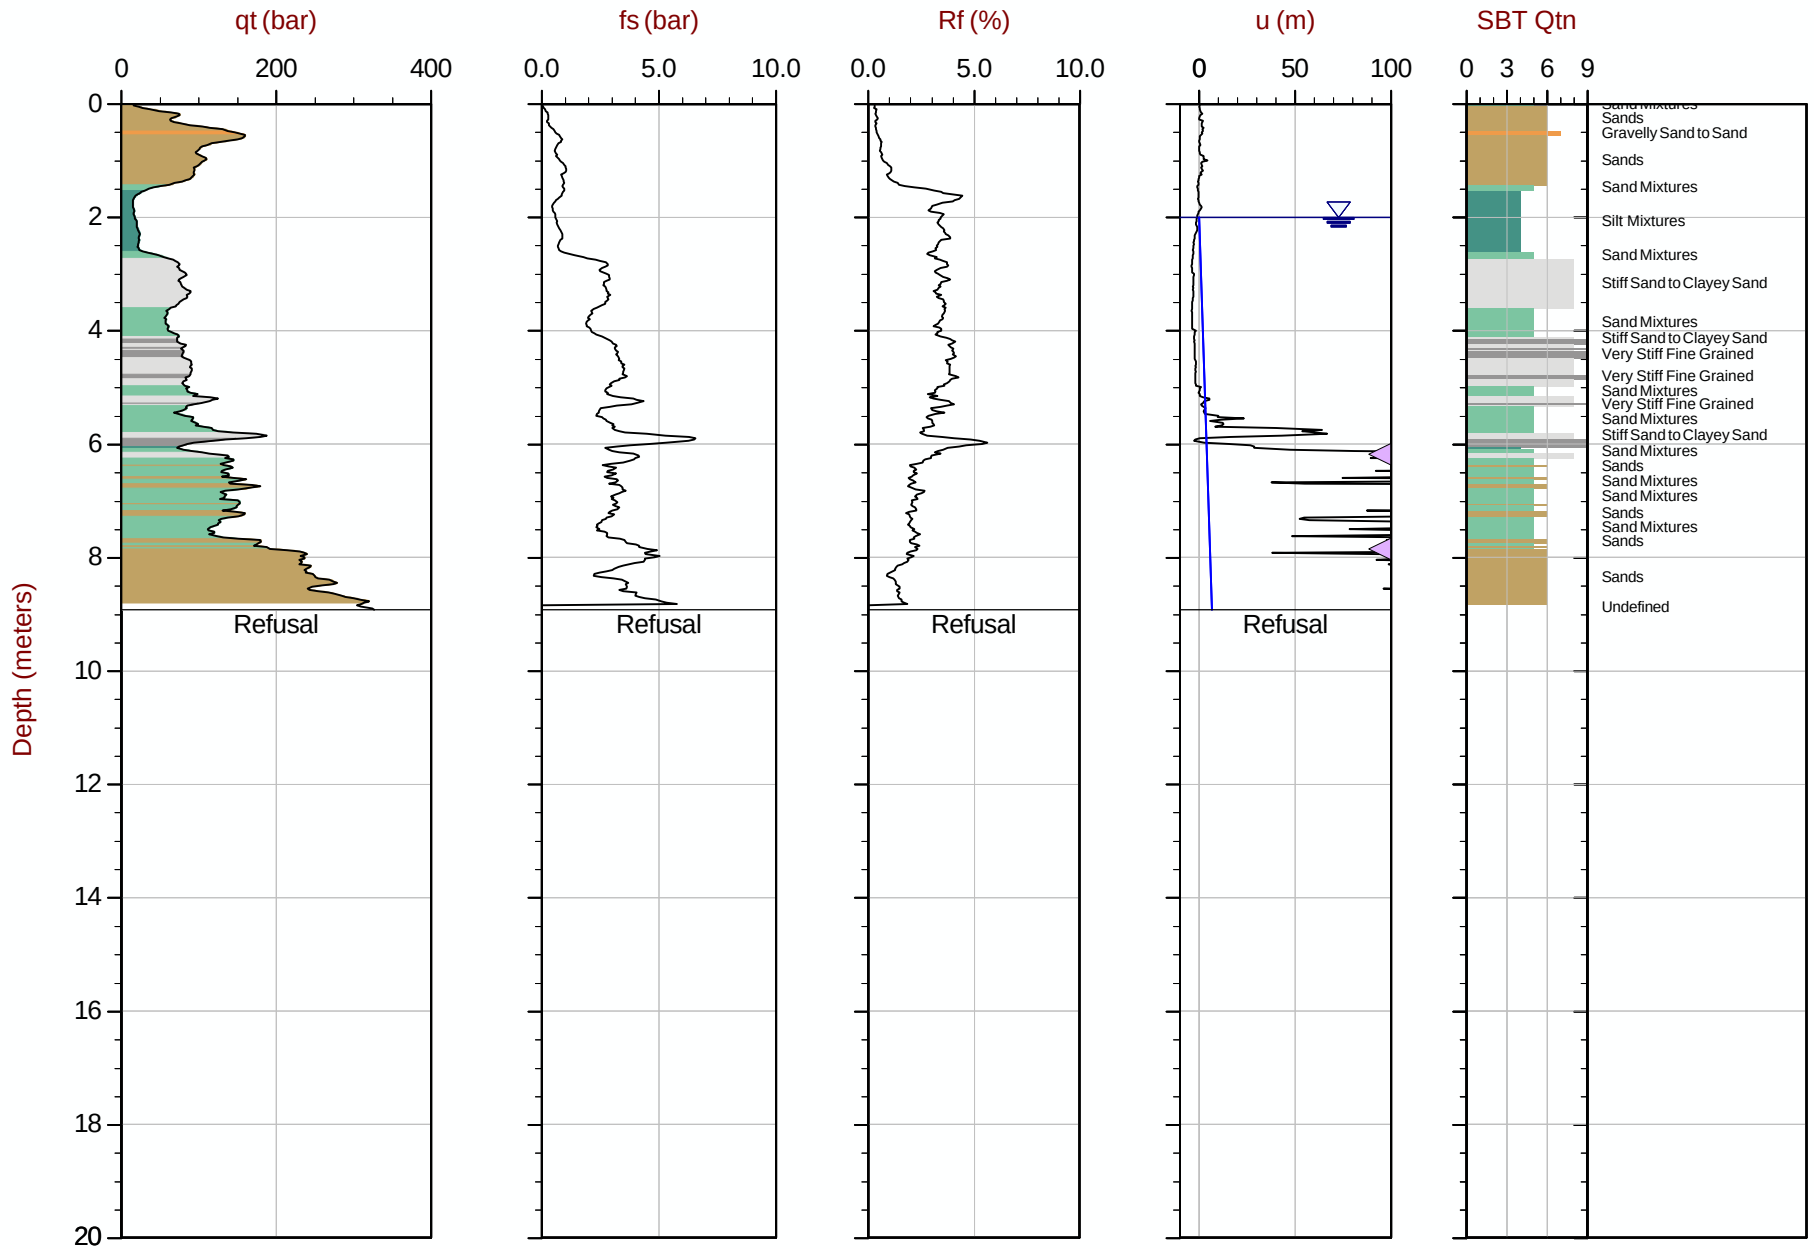

Max Depth: 8.925 m / 29.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT169.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612568m E: 416508m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 11:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT170
Cone: 854:T1500F15U35 Area= 15cm2

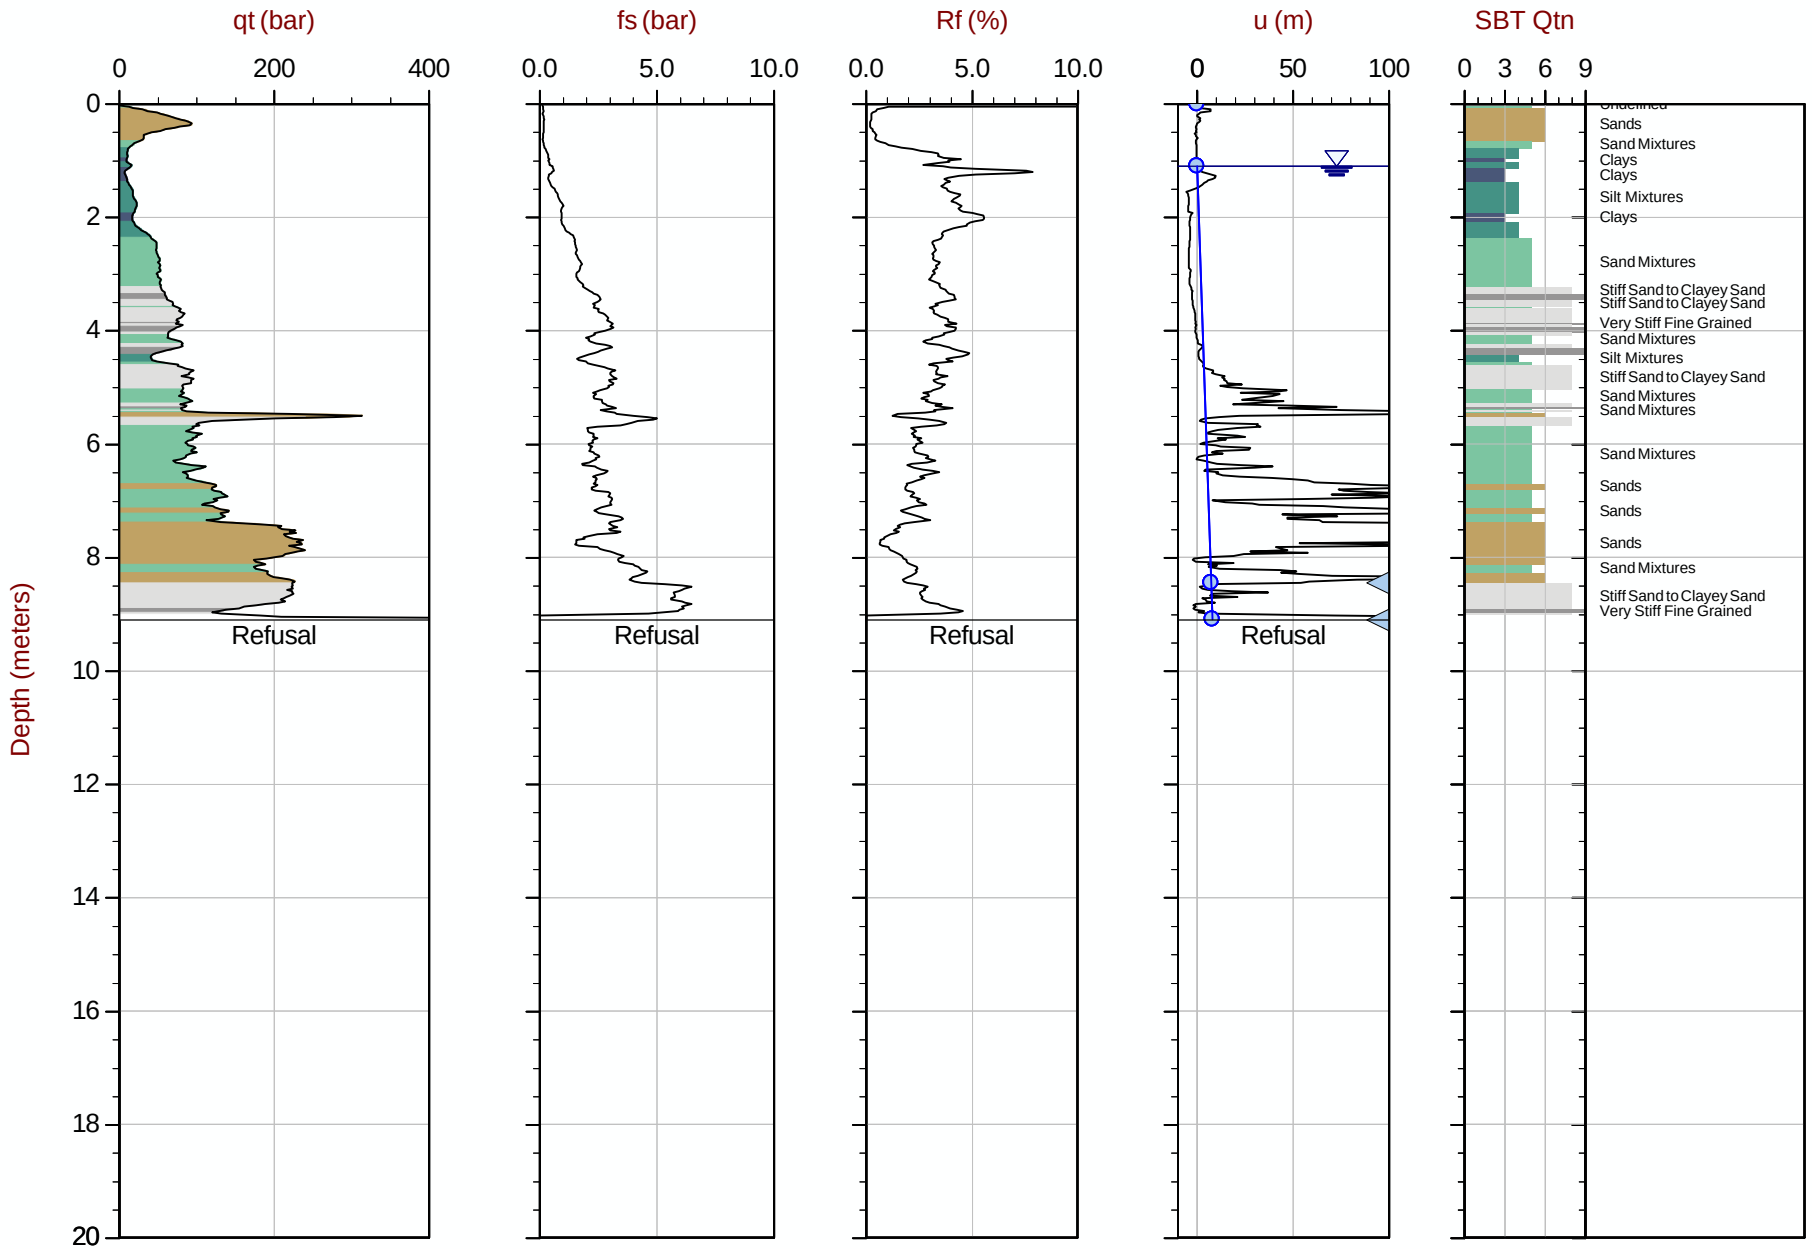

Max Depth: 9.100 m / 29.86 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT170.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612569m E: 416610m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 15:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT200
Cone: 854:T1500F15U35 Area= 15cm2

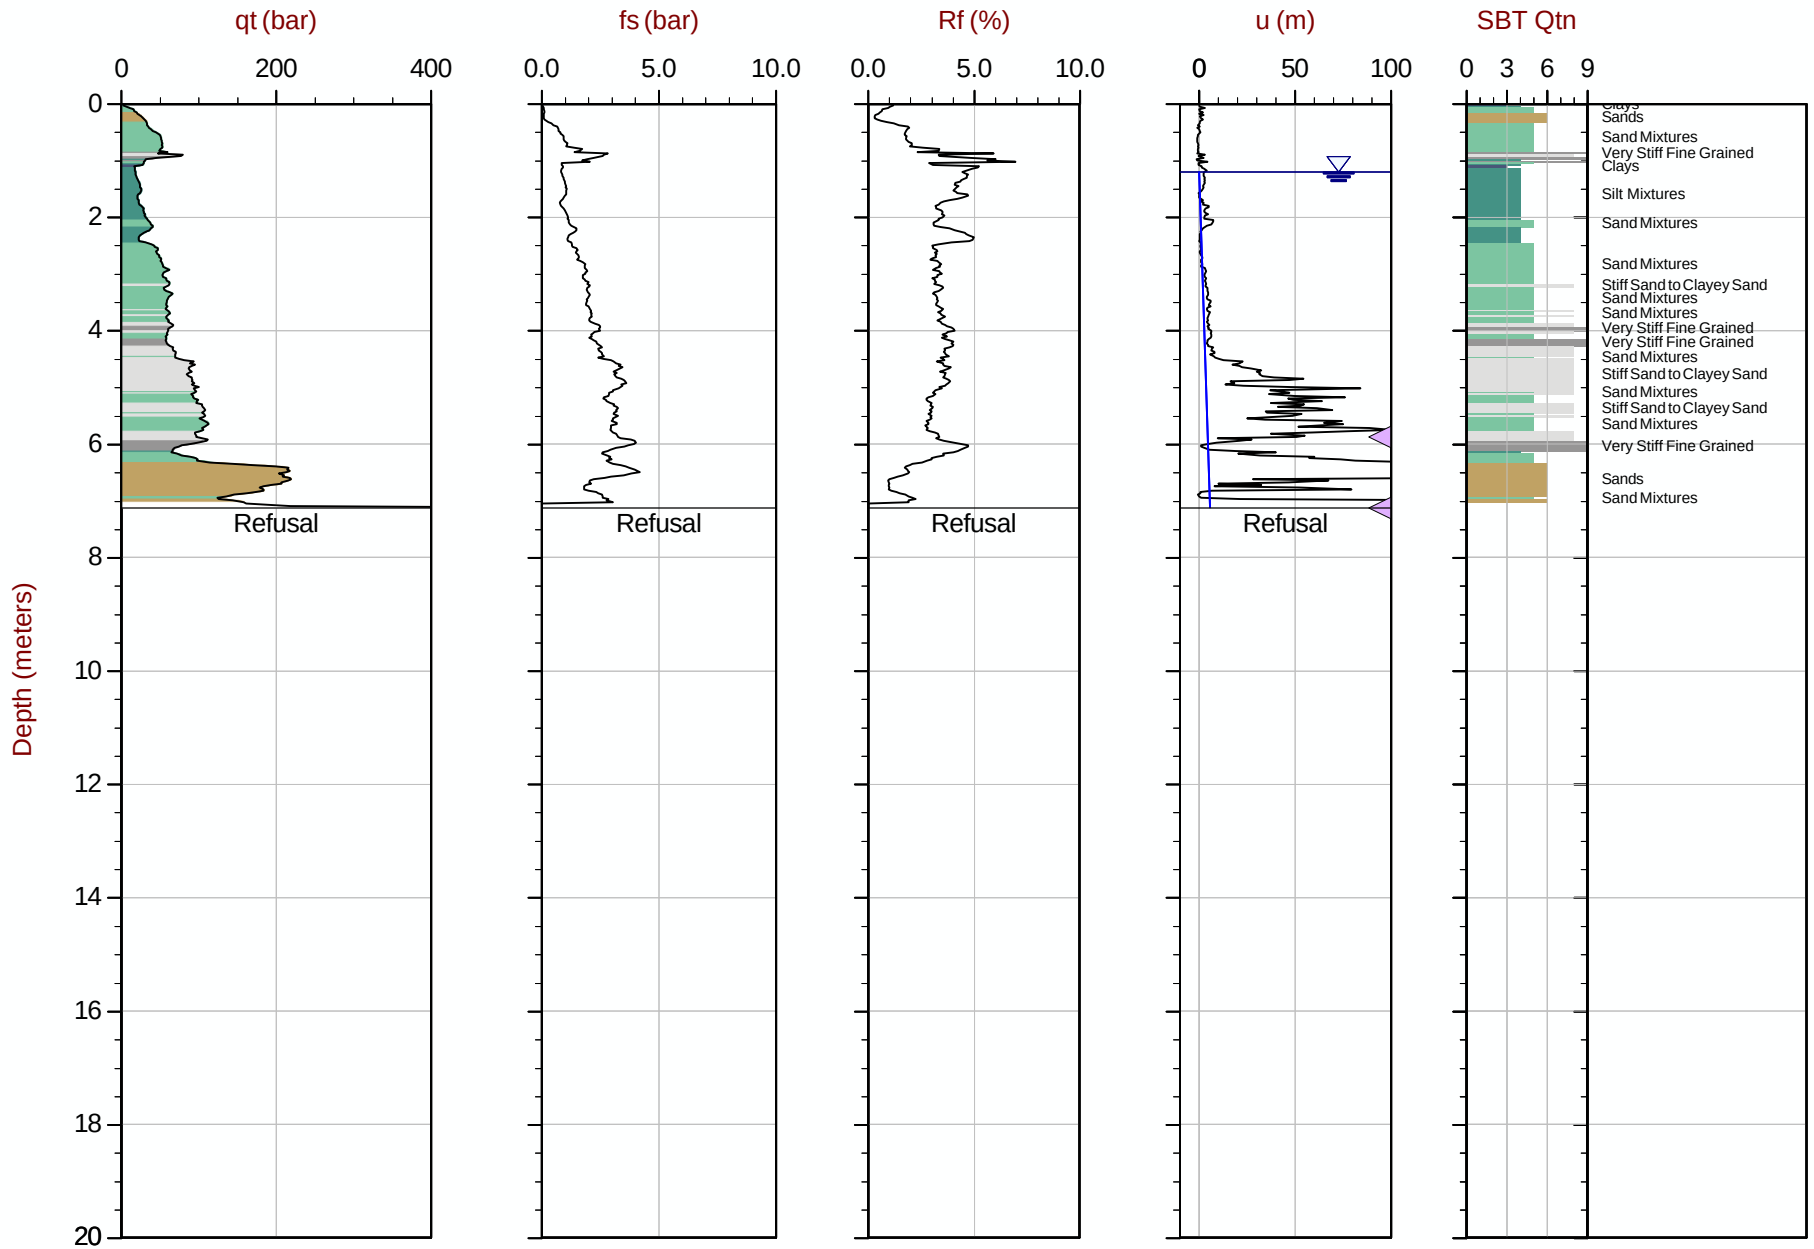

Max Depth: 7.125 m / 23.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT200.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612486m E: 416722m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 16:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT201
Cone: 854:T1500F15U35 Area= 15cm2

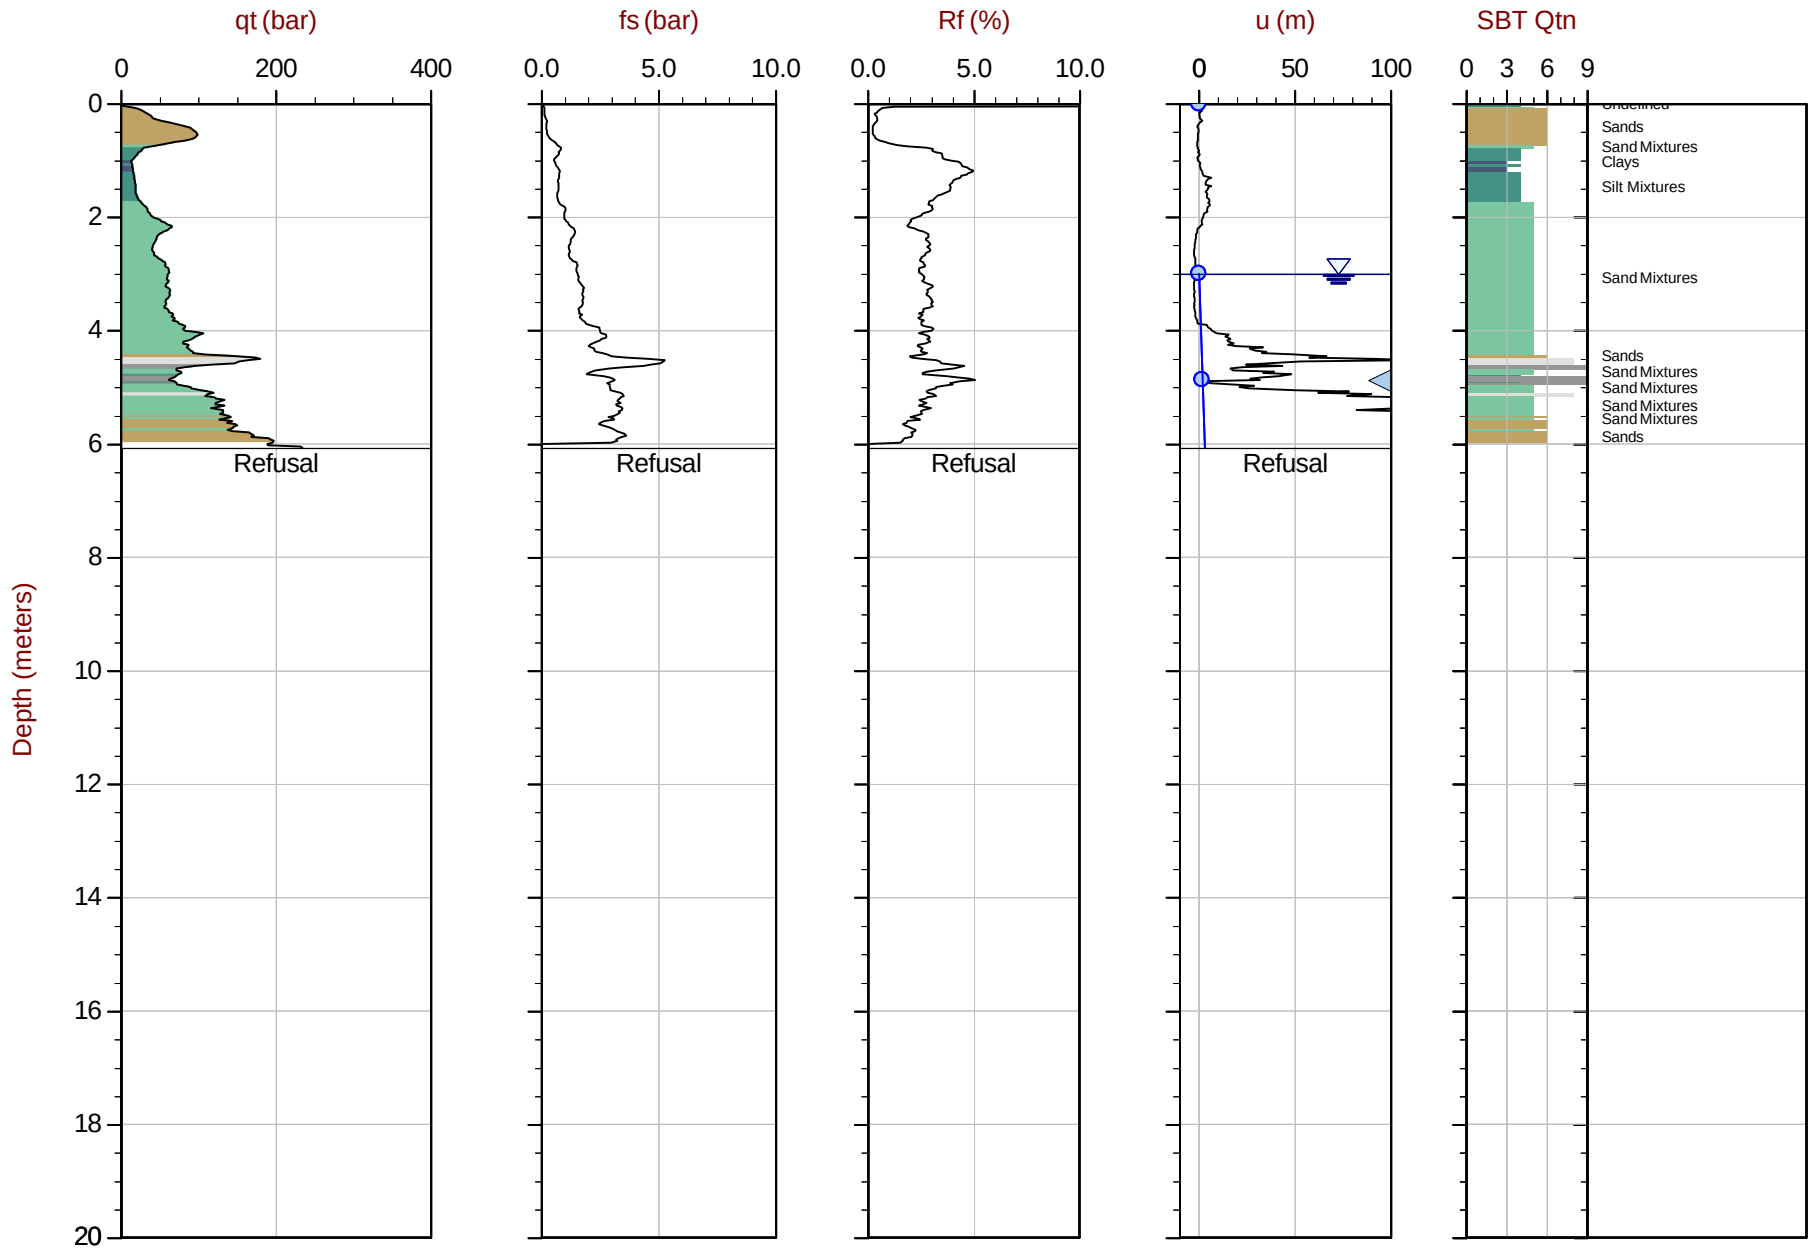

Max Depth: 6.075 m / 19.93 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT201.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612454m E: 416772m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 07:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT202
Cone: 854:T1500F15U35 Area= 15cm2

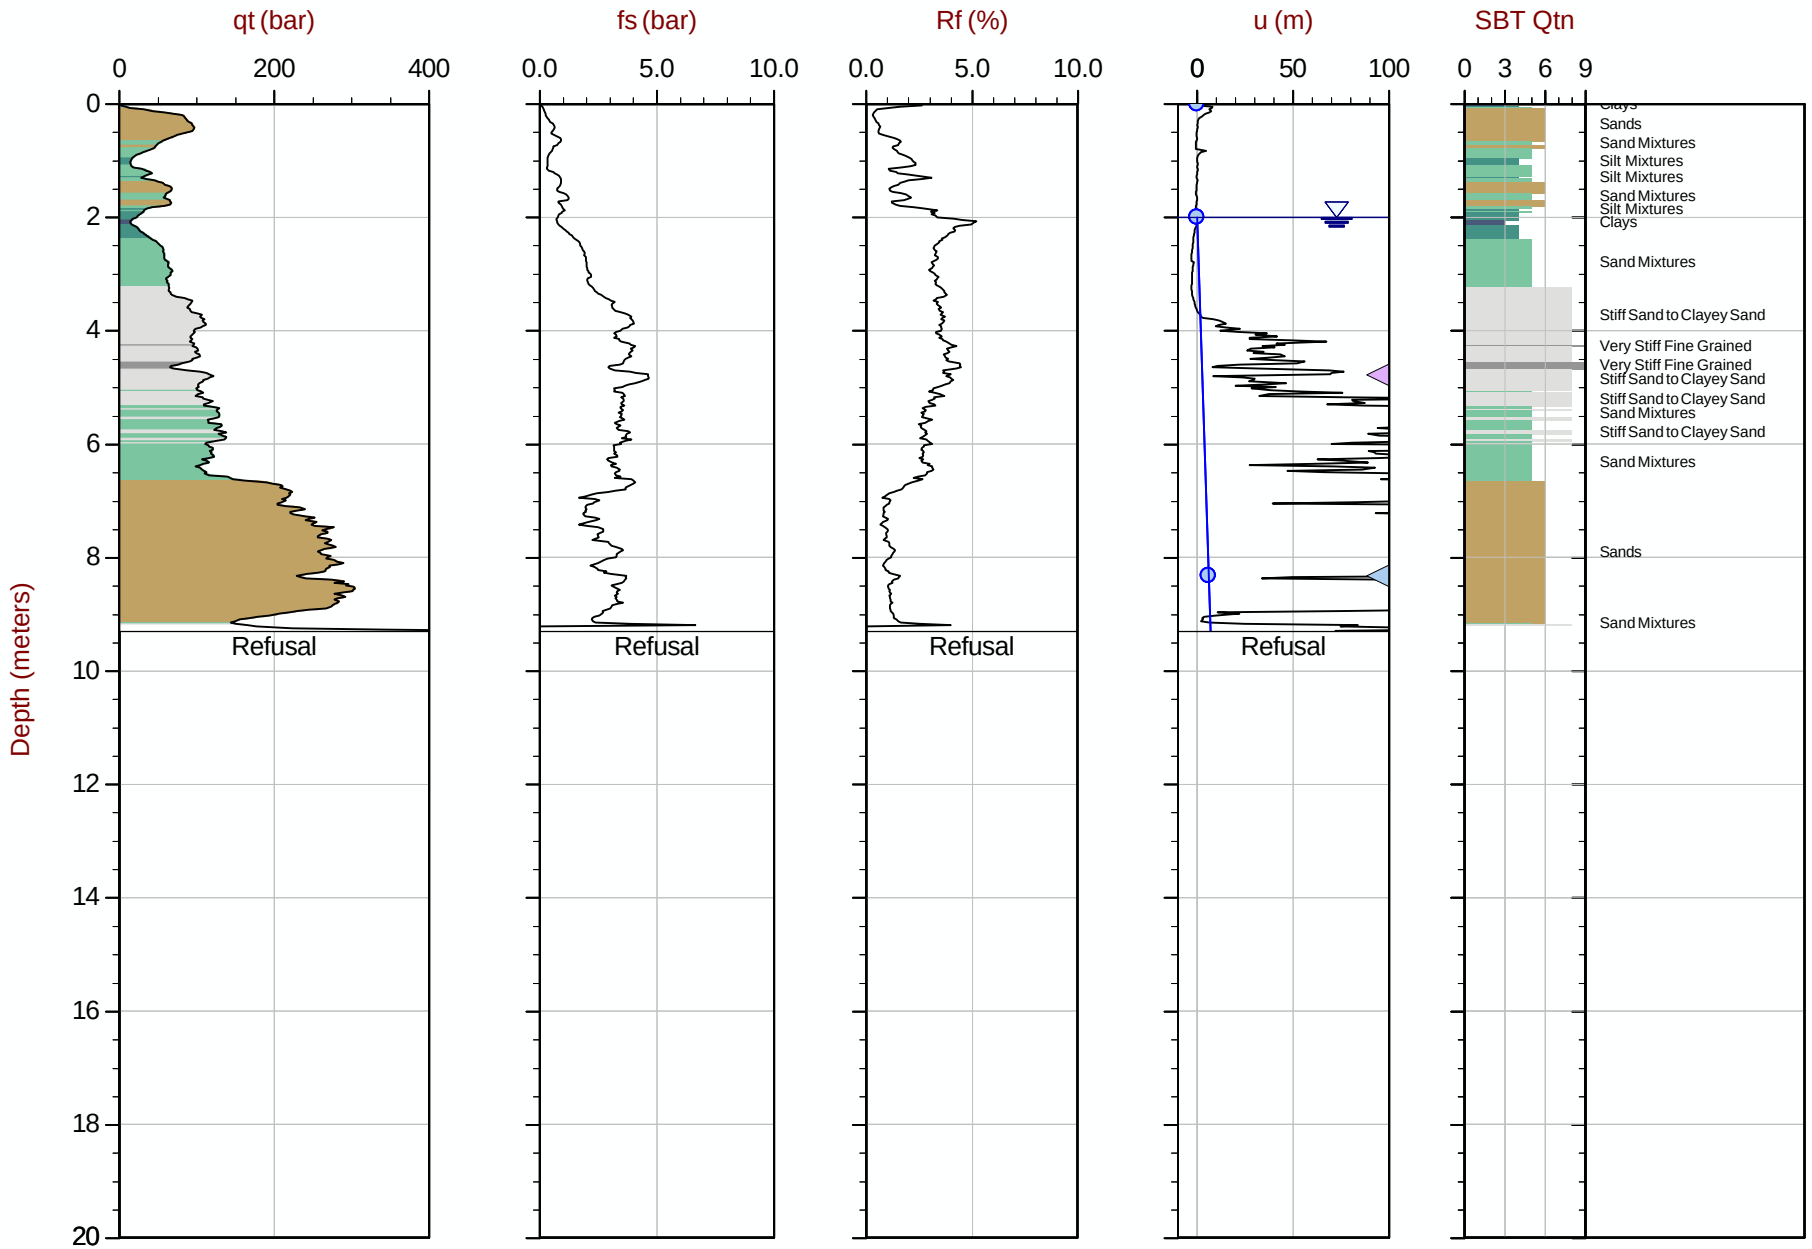

Max Depth: 9.300 m / 30.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT202.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612420m E: 416809m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 08:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT203
Cone: 854:T1500F15U35 Area= 15cm2

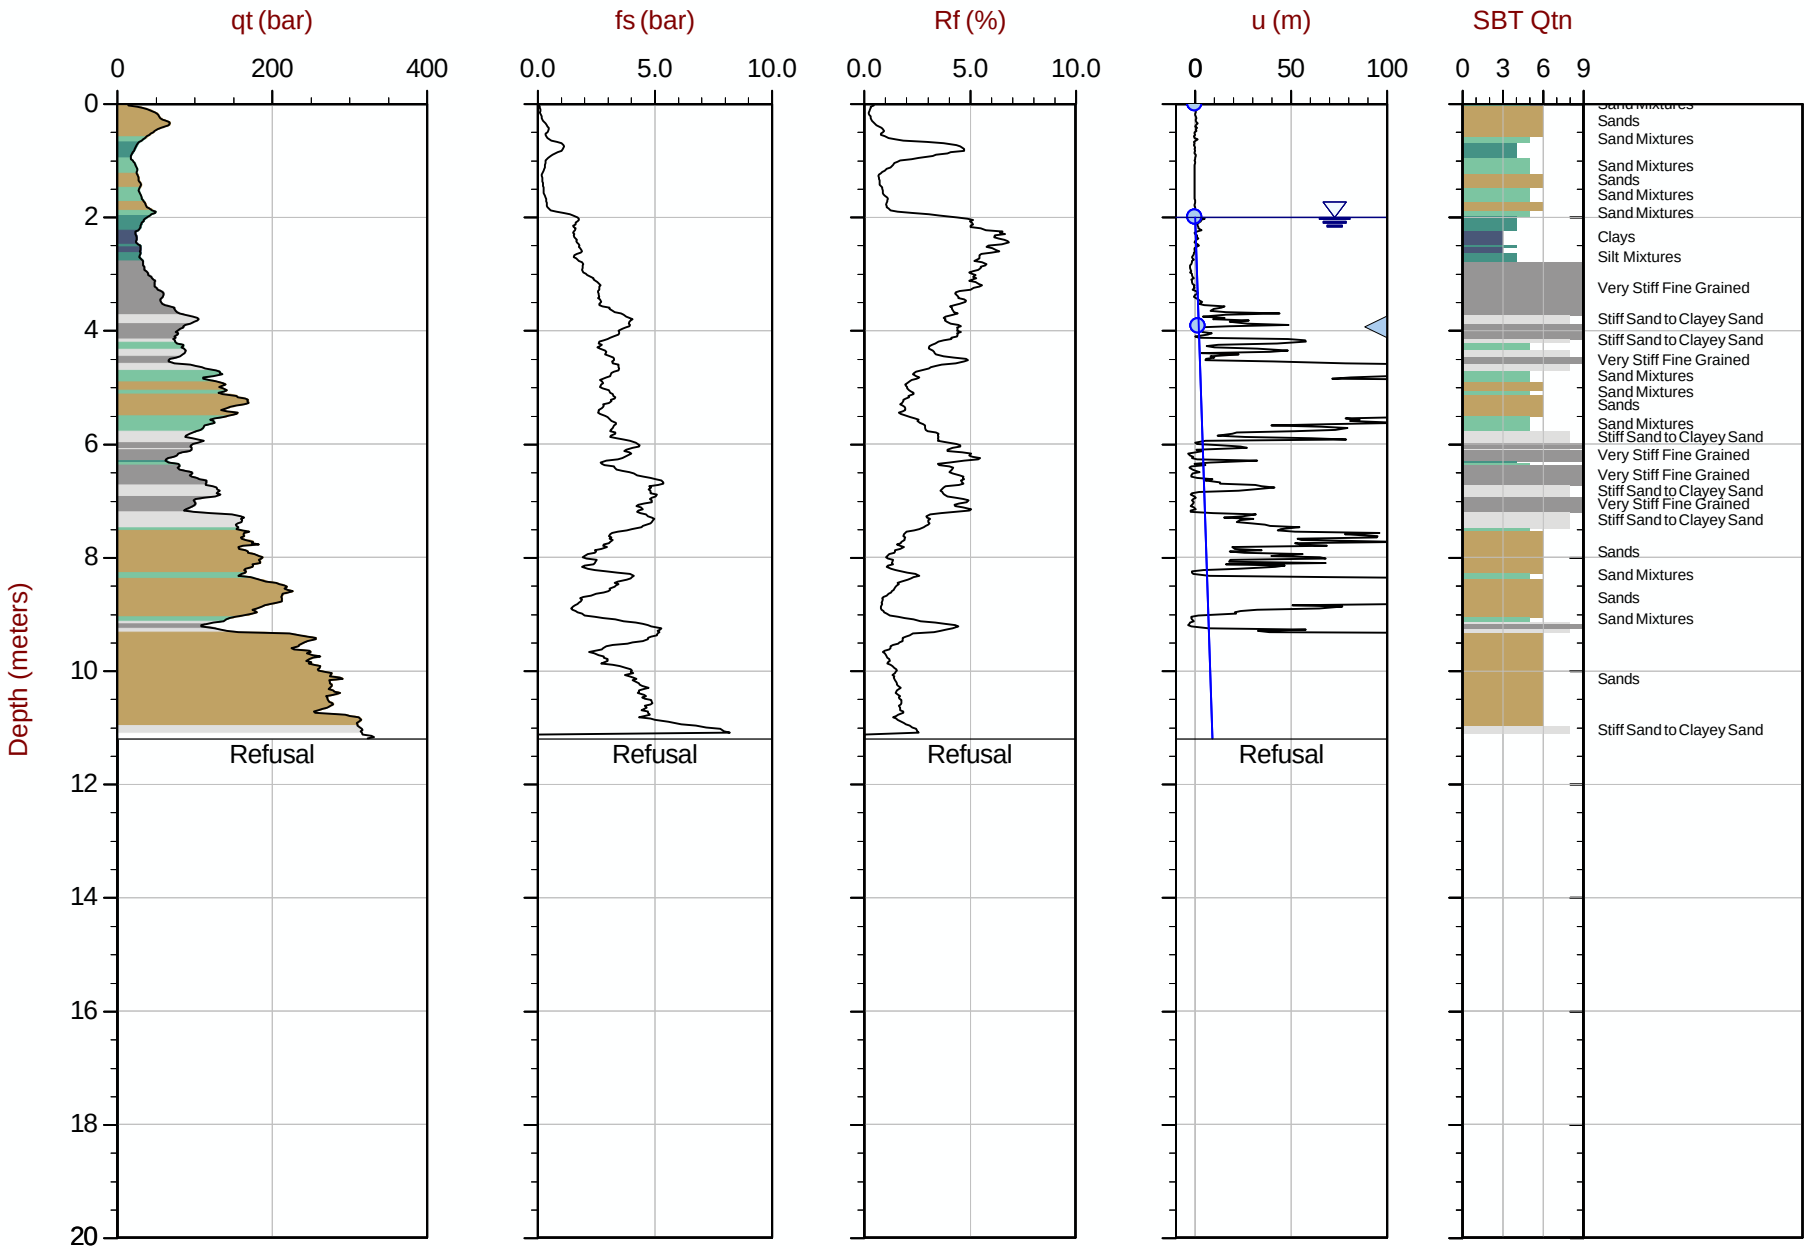

Max Depth: 11.200 m / 36.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT203.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612375m E: 416842m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 09:40
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT204
Cone: 854:T1500F15U35 Area= 15cm2

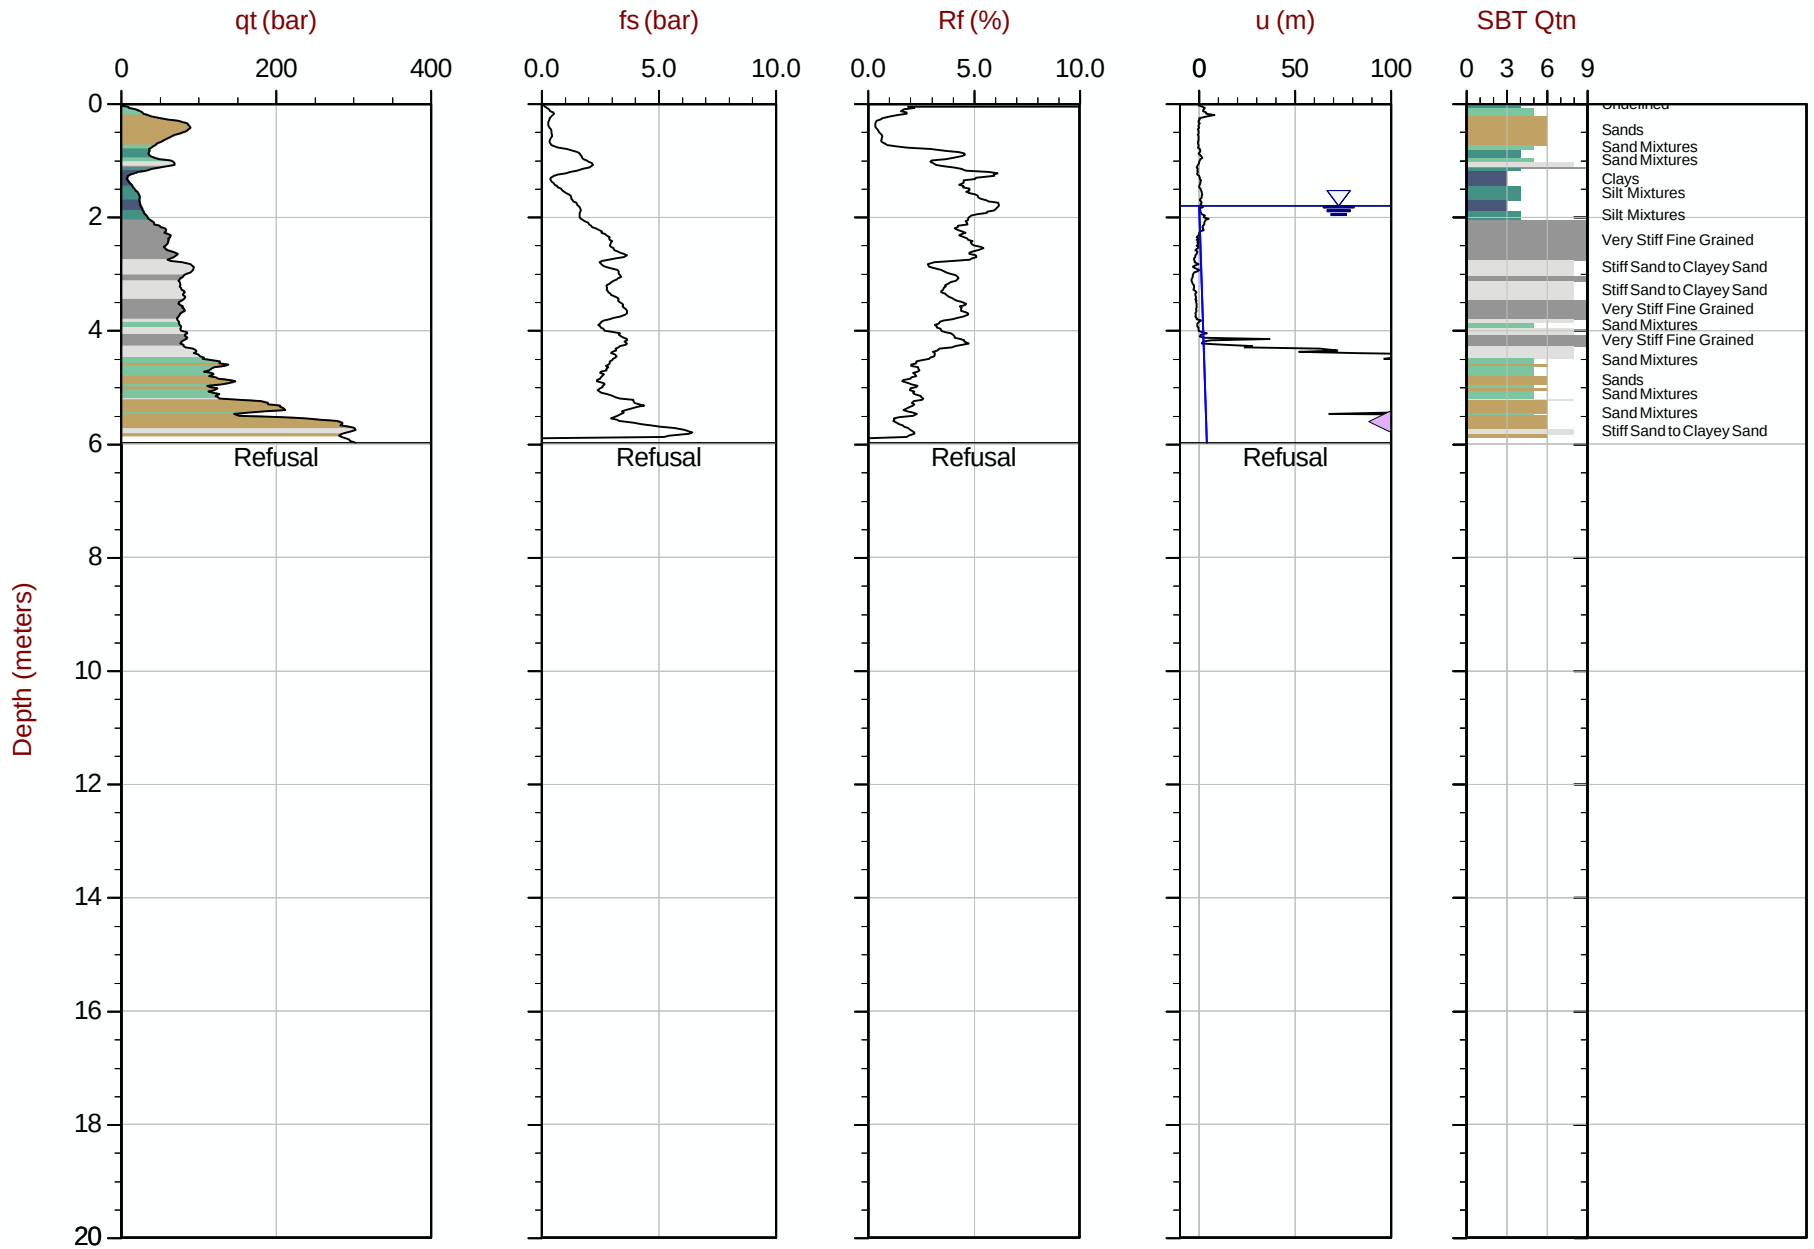

Max Depth: 5.975 m / 19.60 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT204.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612318m E: 416870m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 10:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT205
Cone: 854:T1500F15U35 Area= 15cm2

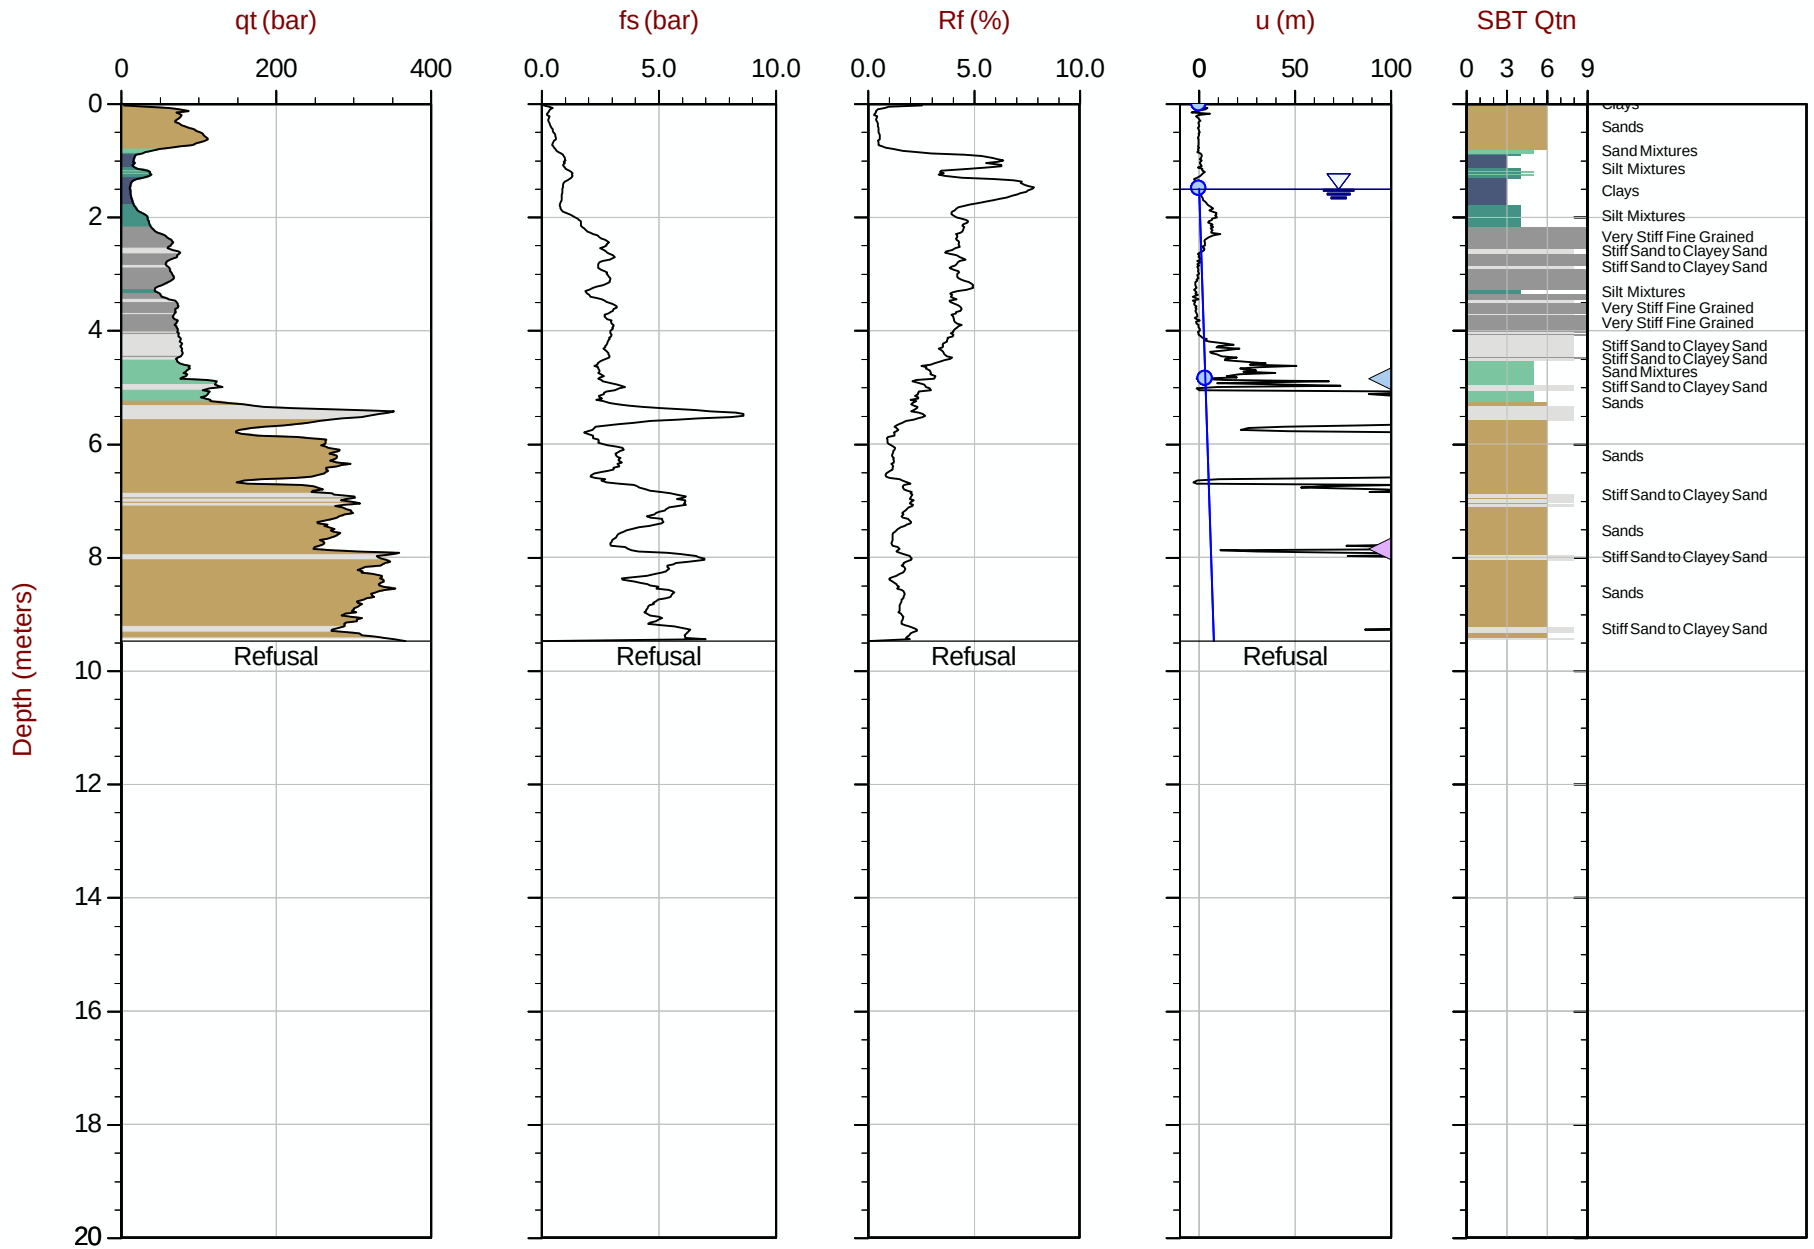

Max Depth: 9.475 m / 31.09 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT205.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612266m E: 416883m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 12:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT206
Cone: 854:T1500F15U35 Area= 15cm2

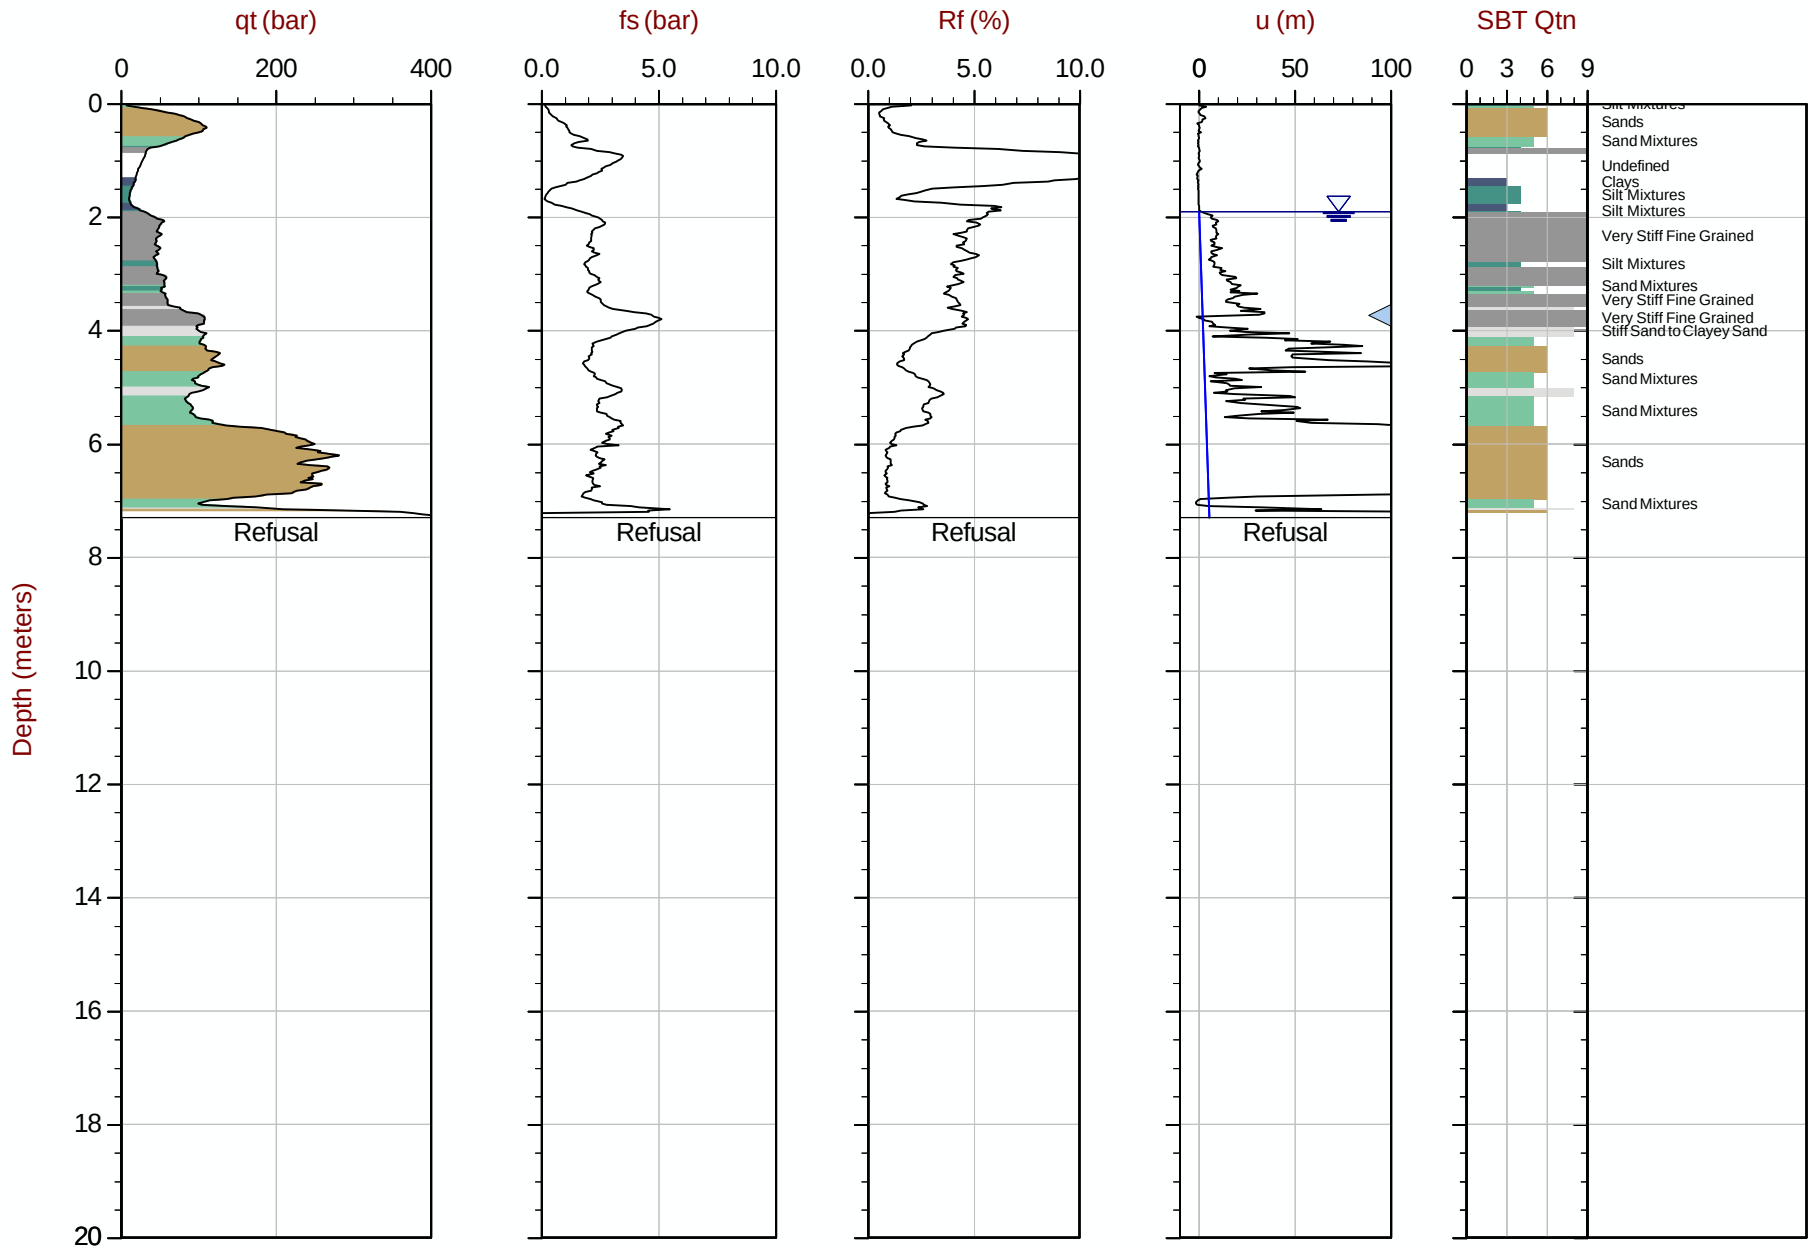

Max Depth: 7.300 m / 23.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT206.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612209m E: 416886m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 13:30
Site: Brooks, Alberta

Sounding: RCPT22-22CPT207
Cone: 854:T1500F15U35 Area= 15cm2

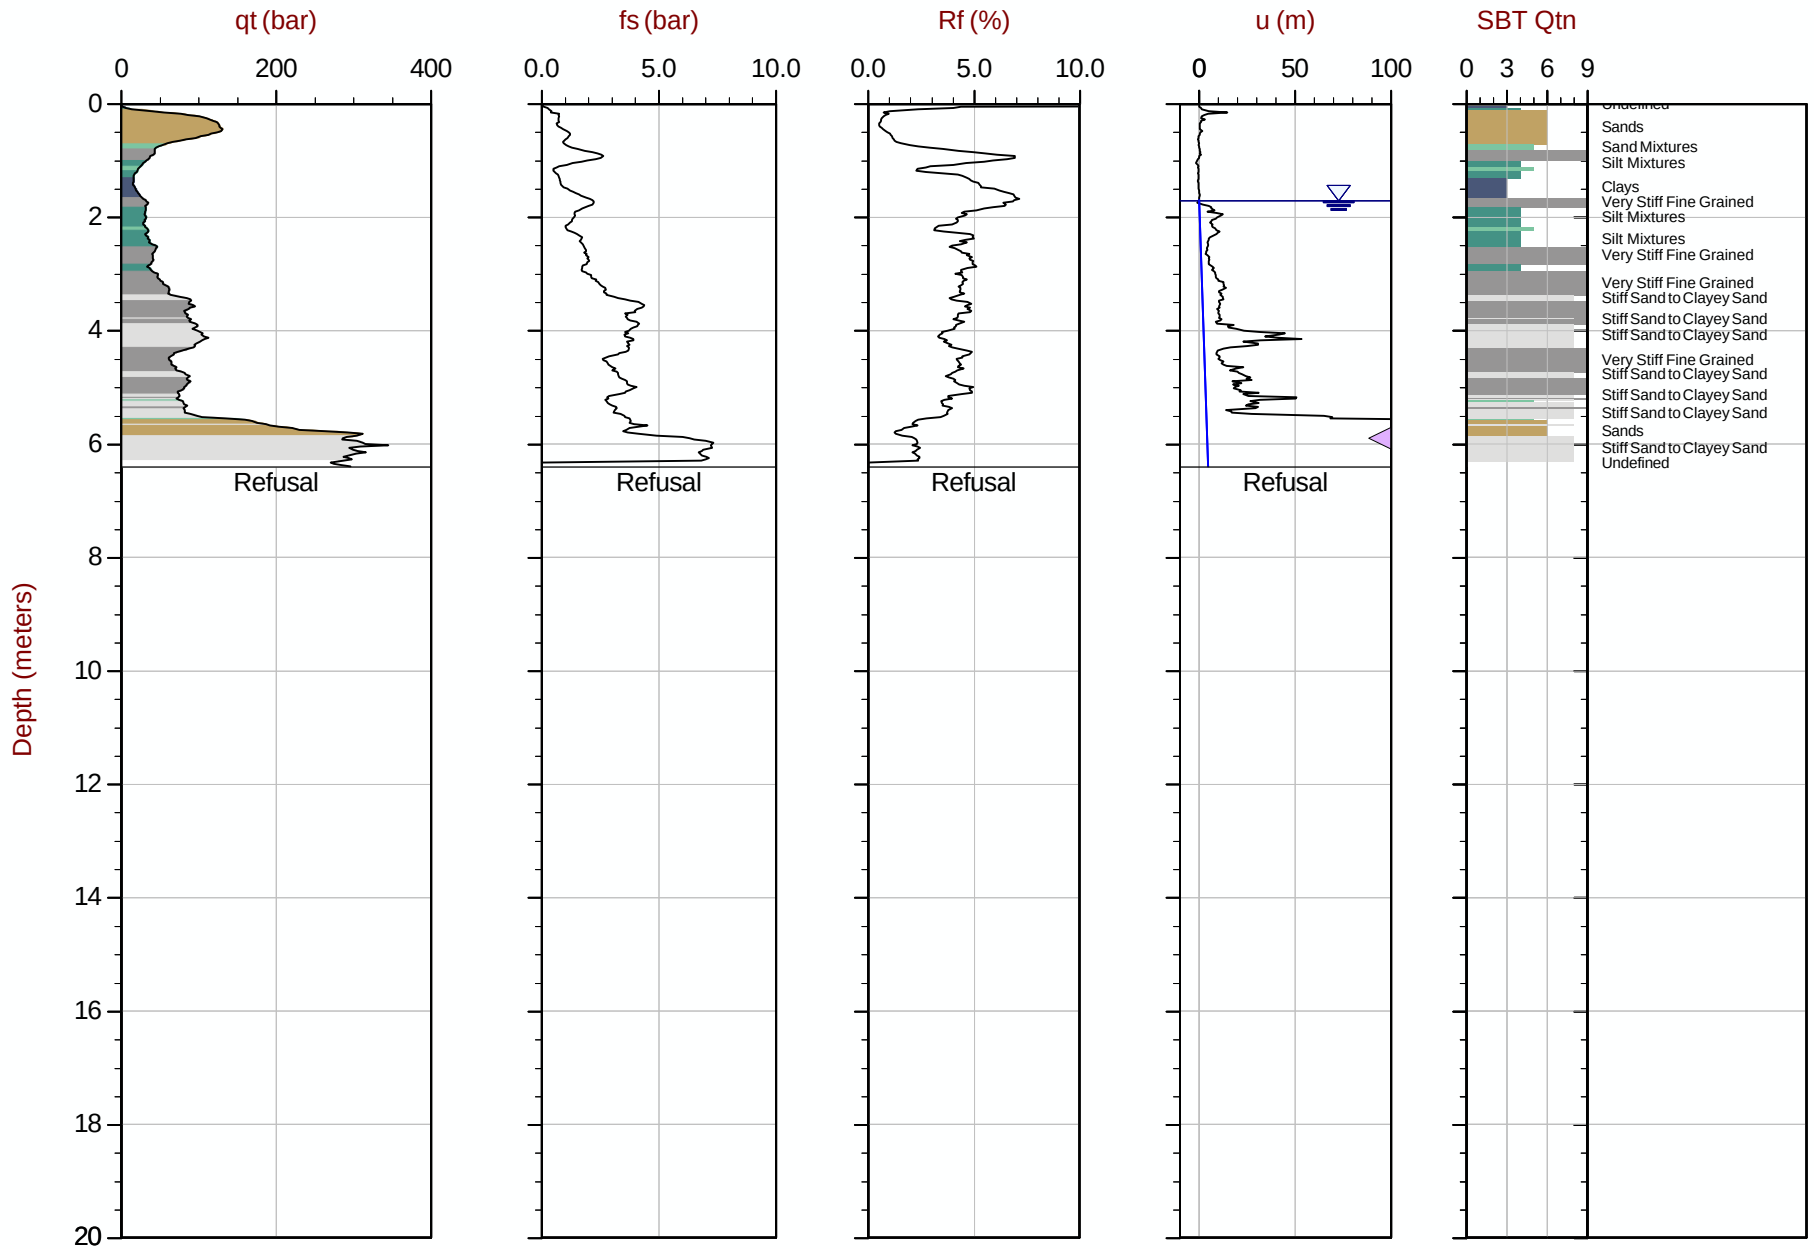

Max Depth: 6.400 m / 21.00 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT207.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612157m E: 416885m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 14:06
Site: Brooks Alberta

Sounding: RCPT22-22CPT208
Cone: 854:T1500F15U35 Area= 15cm2

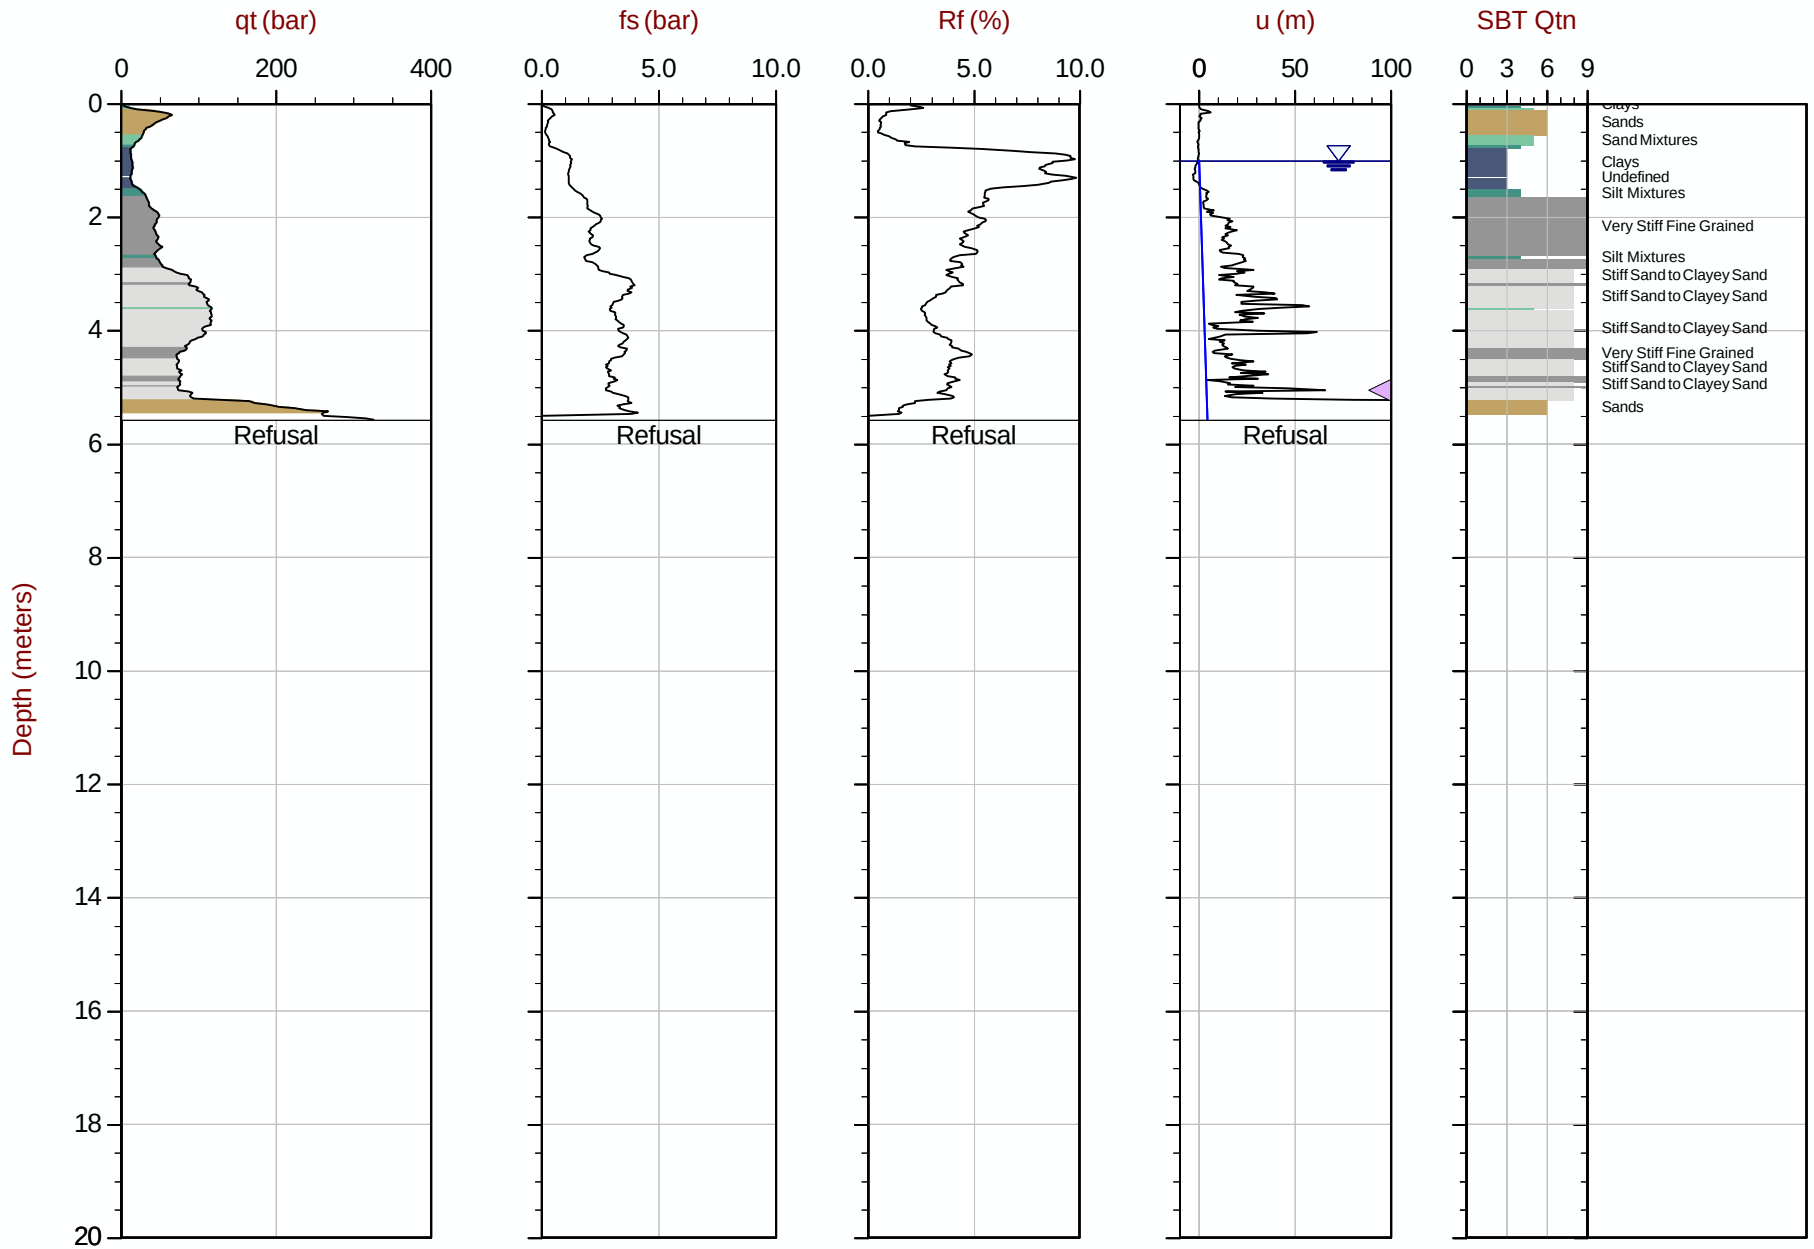

Max Depth: 5.575 m / 18.29 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT208.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612109m E: 416884m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 15:07
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT209
Cone: 854:T1500F15U35 Area= 15cm2

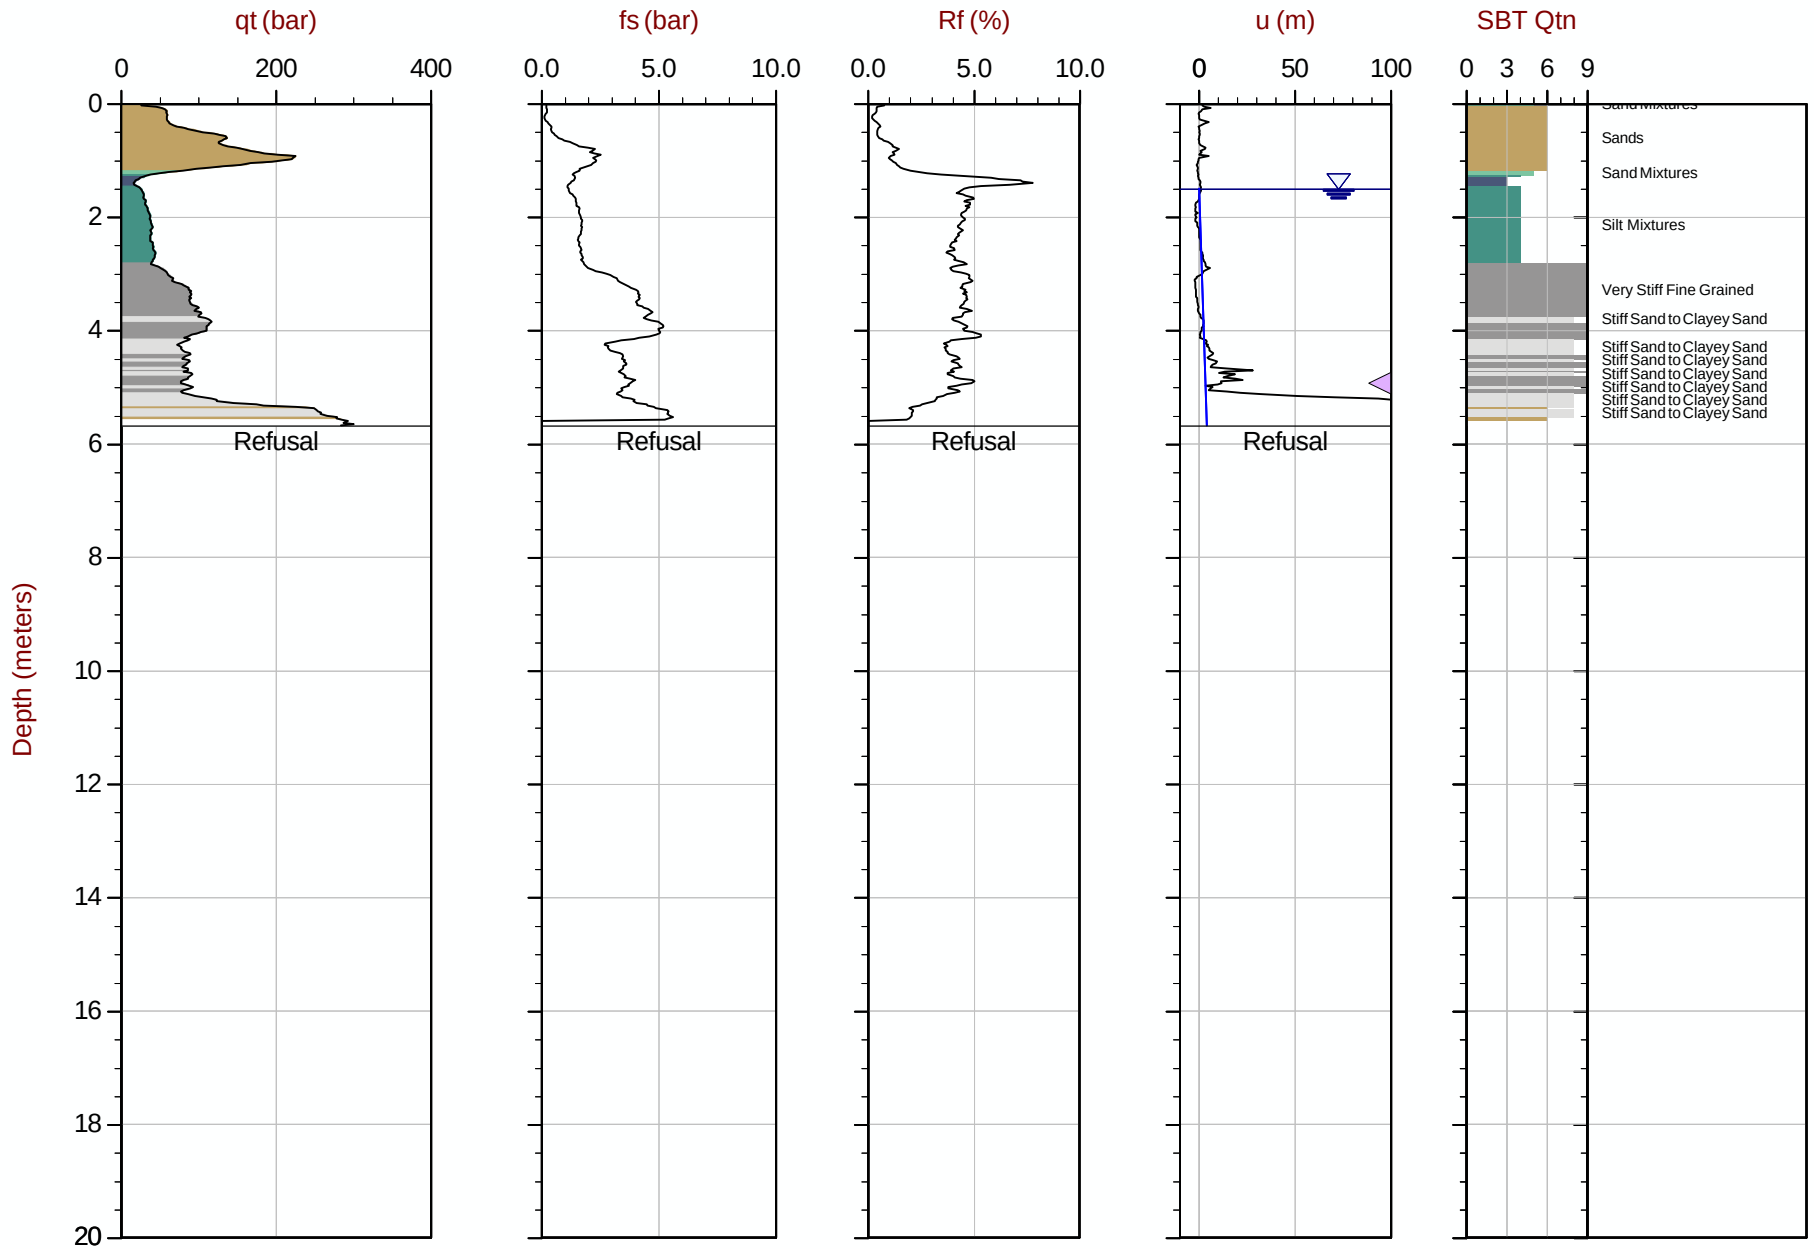

Max Depth: 5.675 m / 18.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT209.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612057m E: 416883m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 15:55
Site: Brooks, Alberta

Sounding: RCPT22-22CPT210
Cone: 854:T1500F15U35 Area= 15cm2

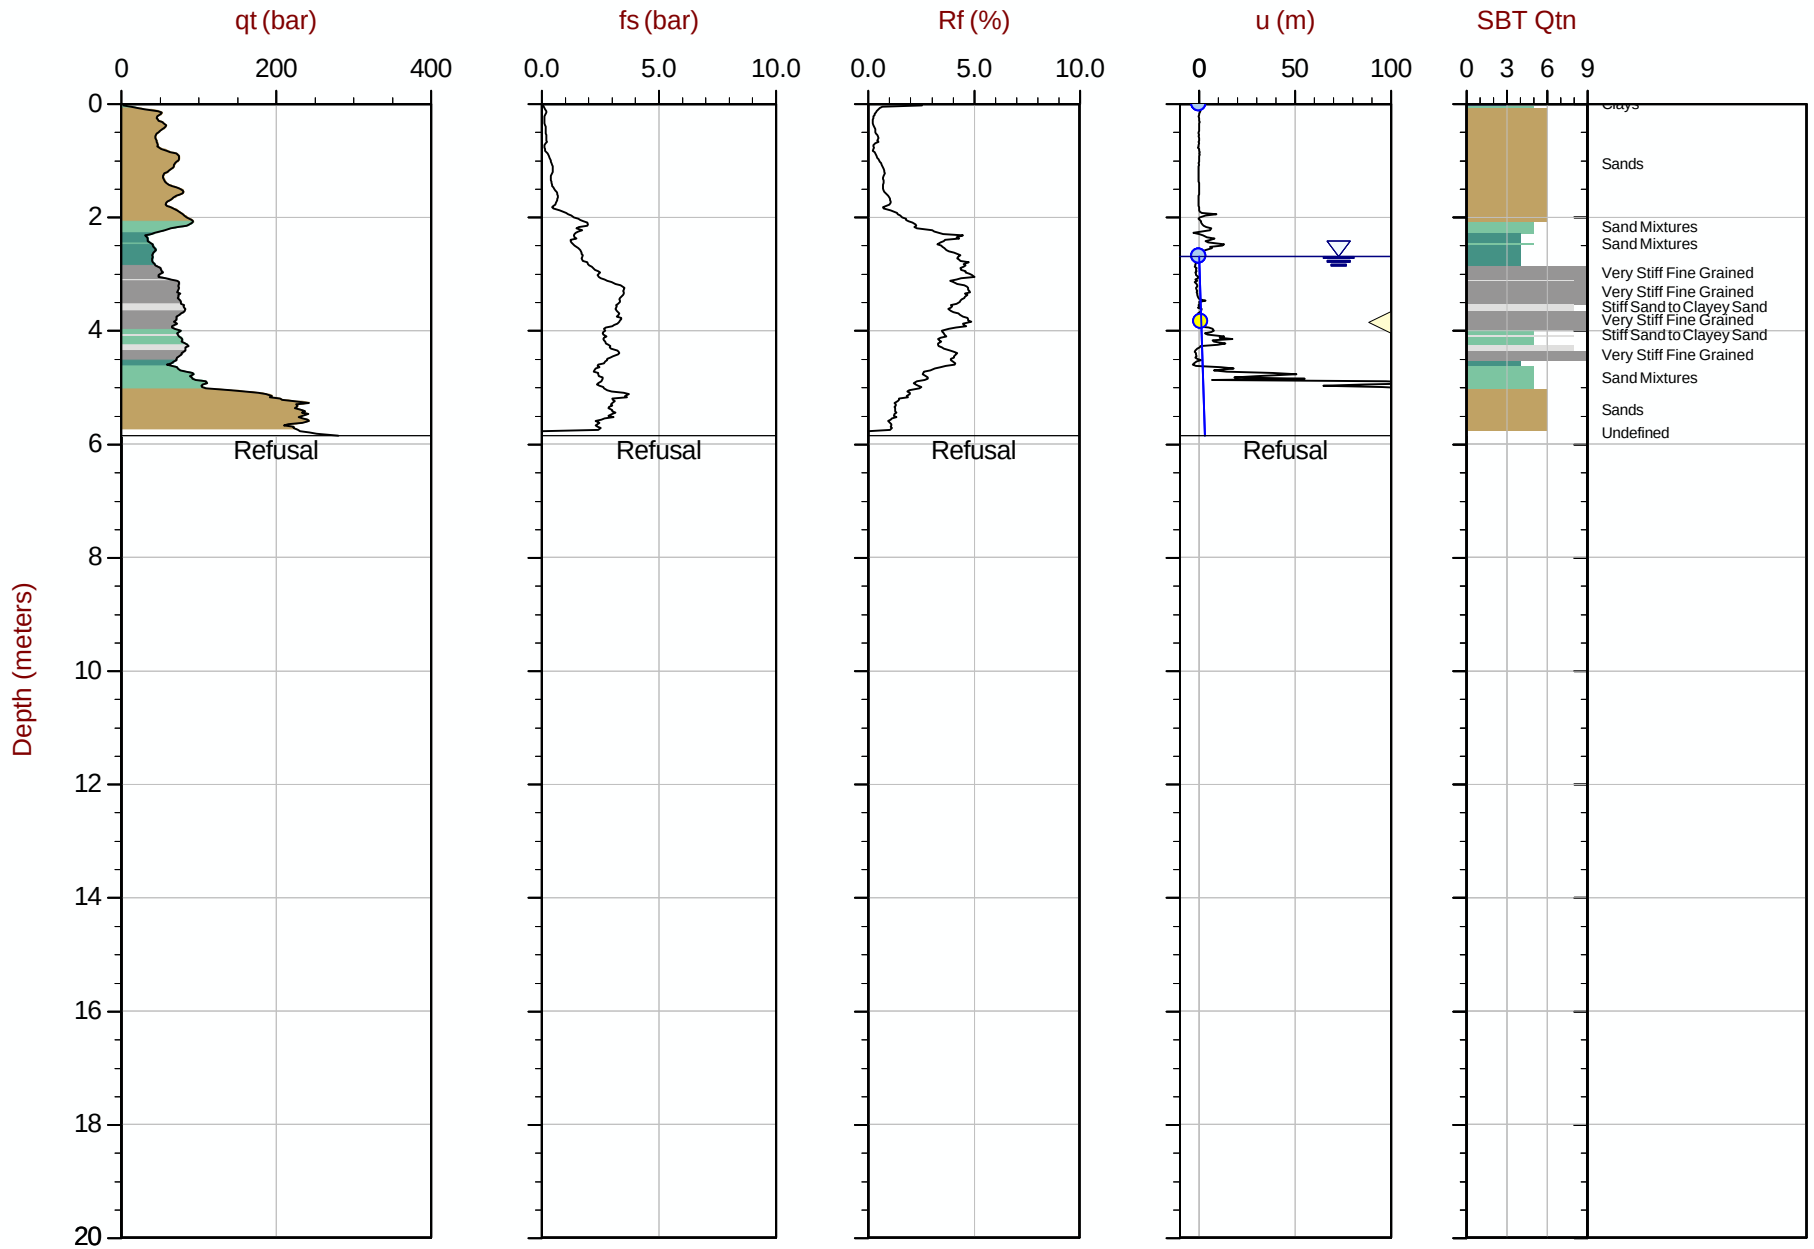

Max Depth: 5.850 m / 19.19 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT210.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612008m E: 416881m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 16:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT211
Cone: 854:T1500F15U35 Area= 15cm2

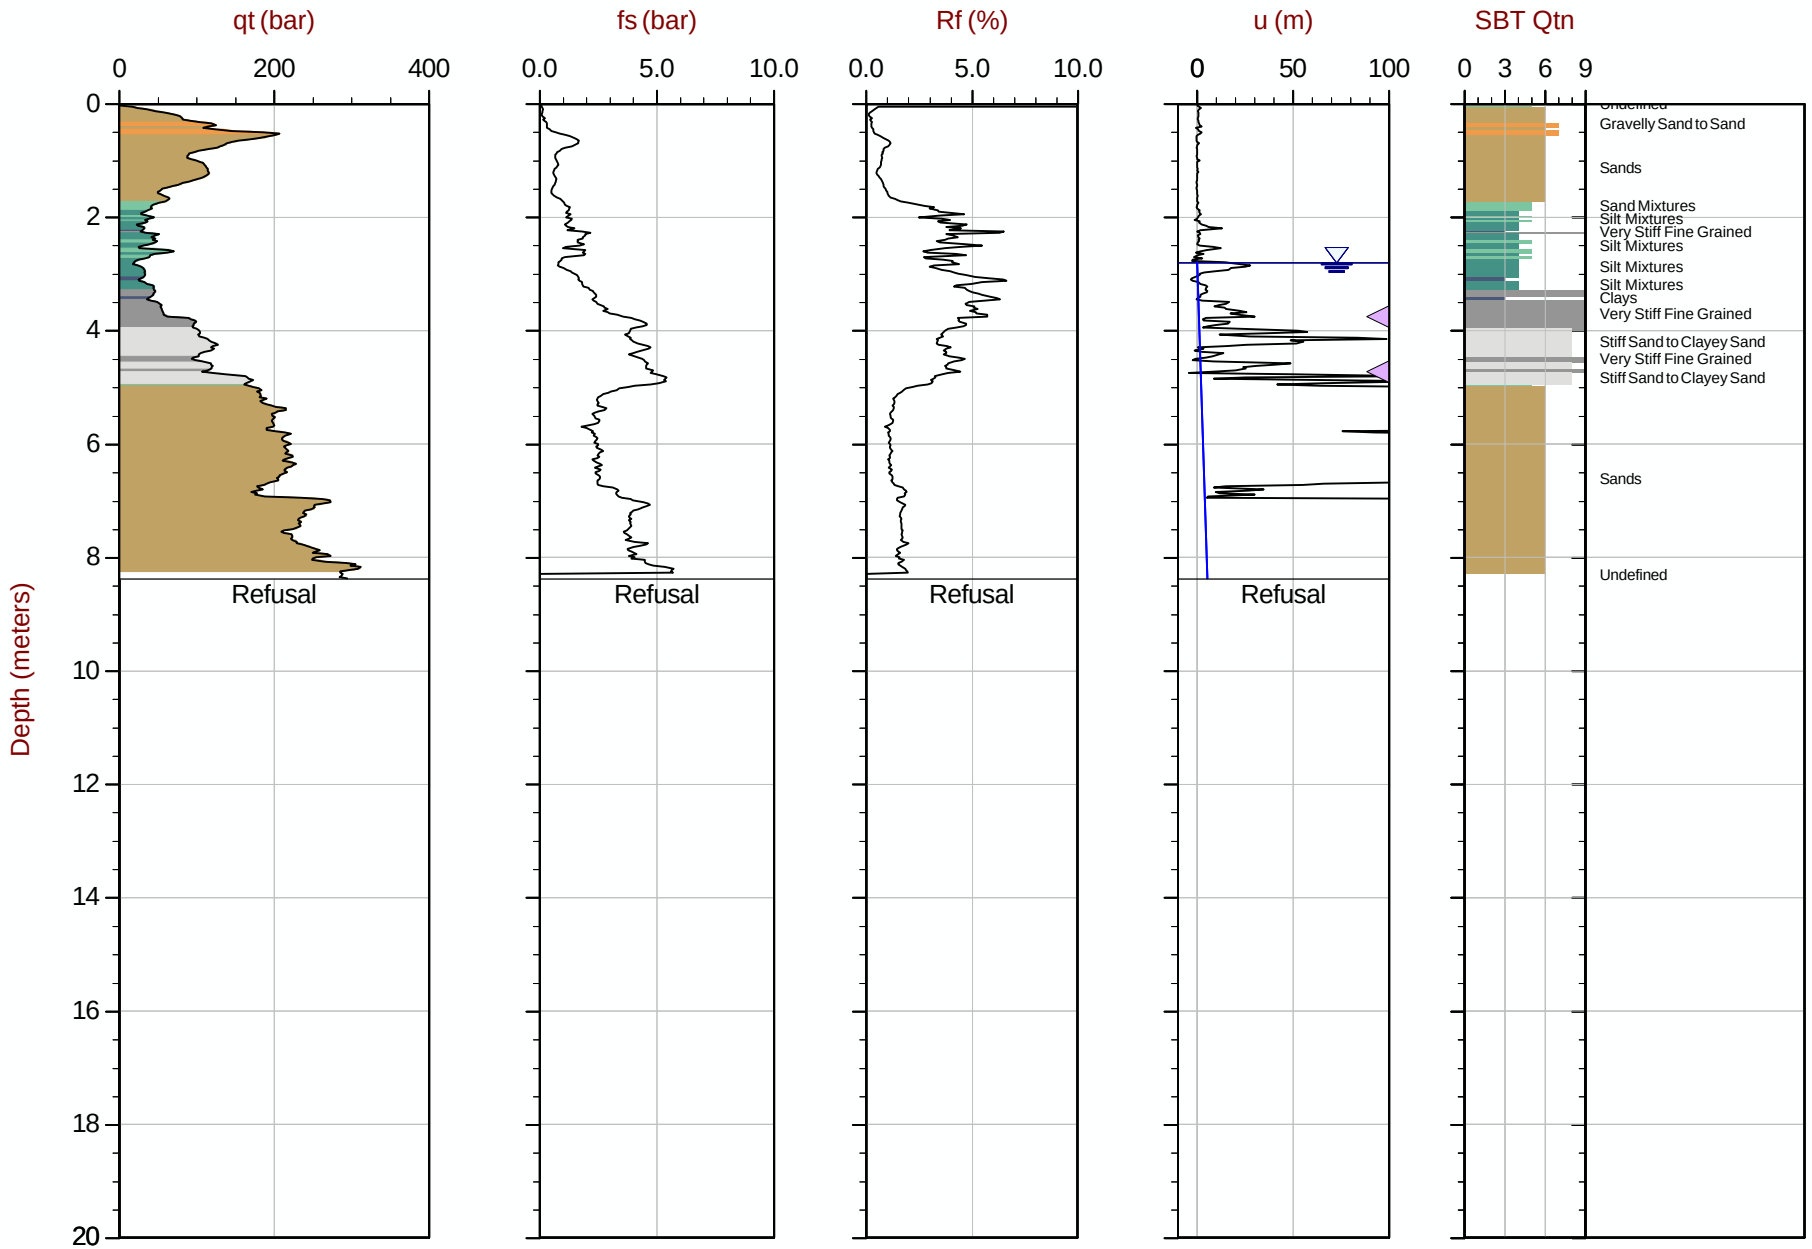

Max Depth: 8.375 m / 27.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT211.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611957m E: 416880m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 17:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT212
Cone: 854:T1500F15U35 Area= 15cm2

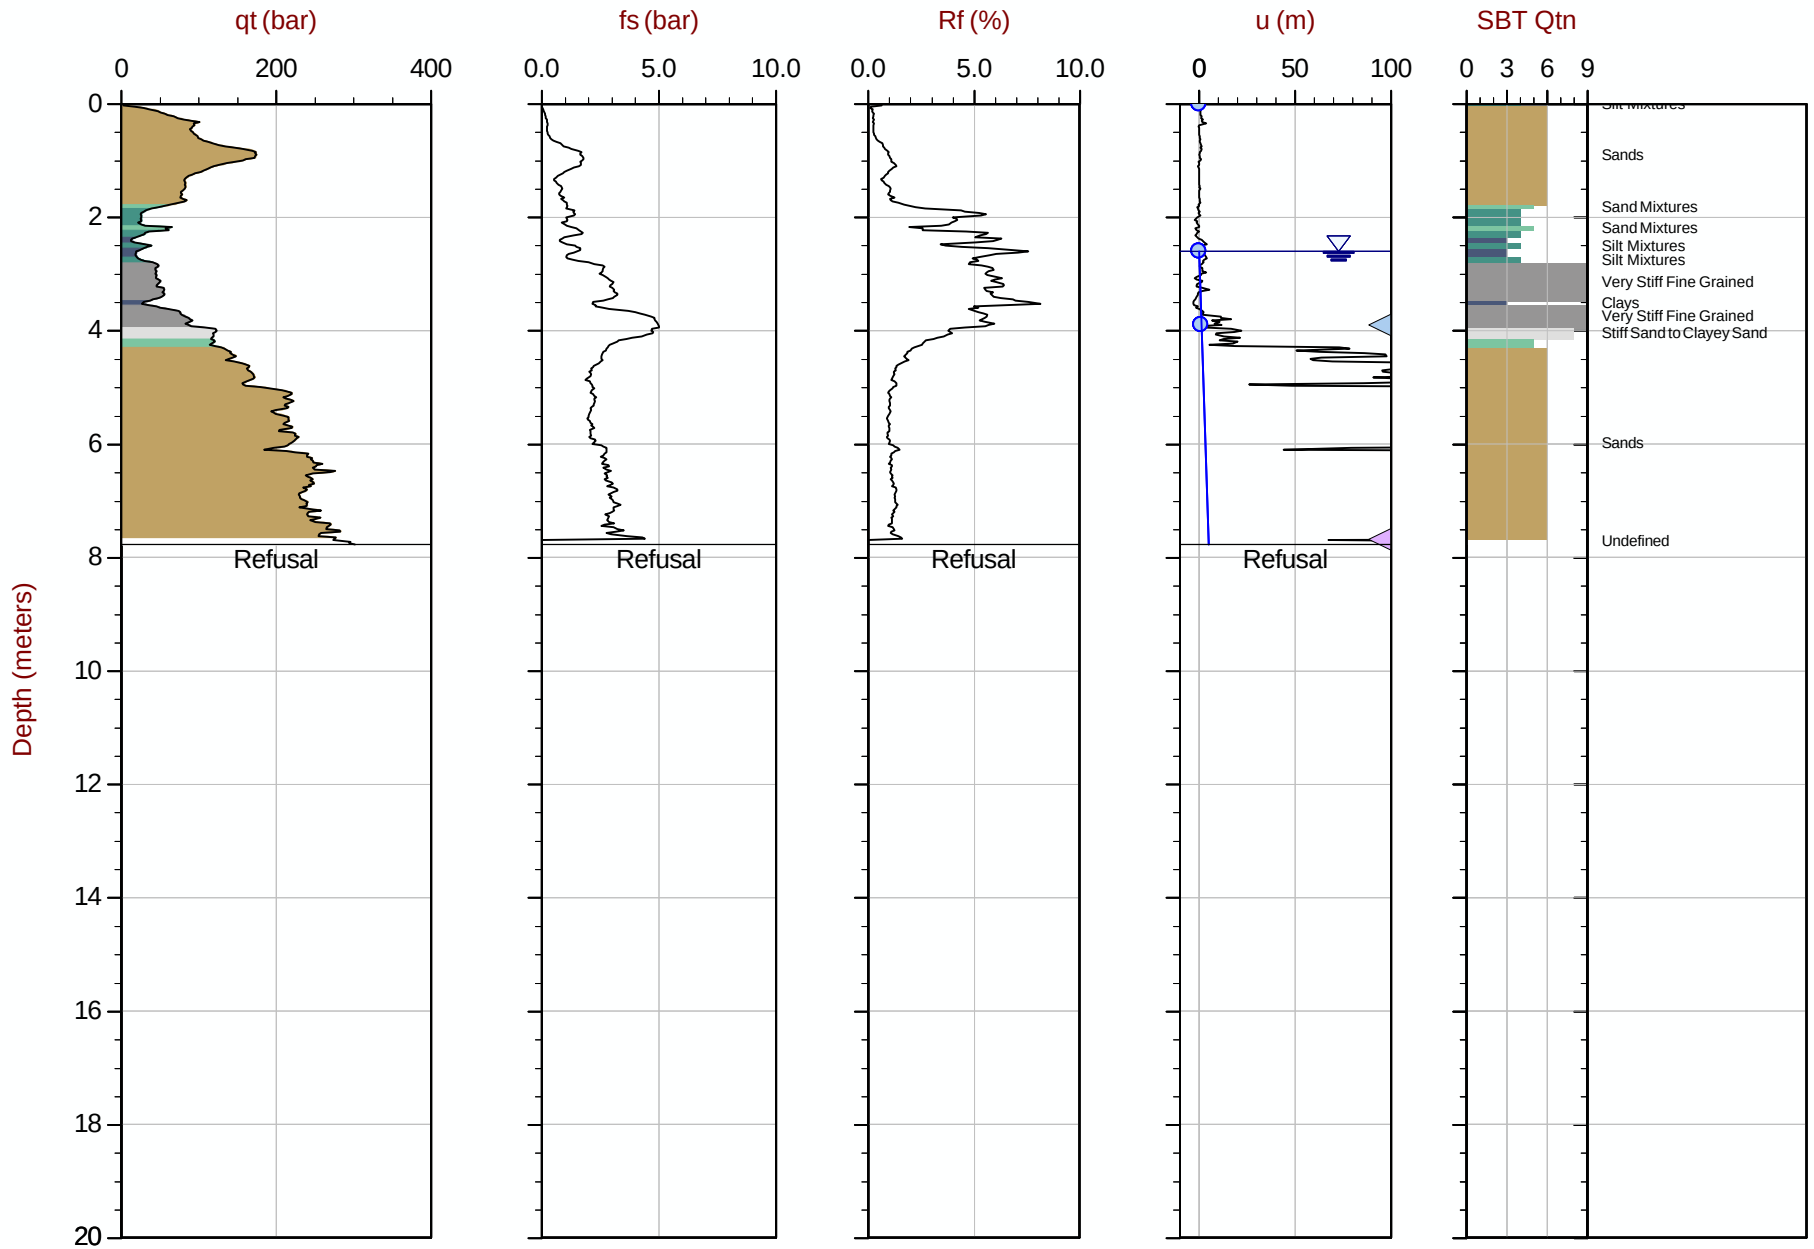

Max Depth: 7.775 m / 25.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT212.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611908m E: 416879m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 06:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT213
Cone: 854:T1500F15U35 Area= 15cm2

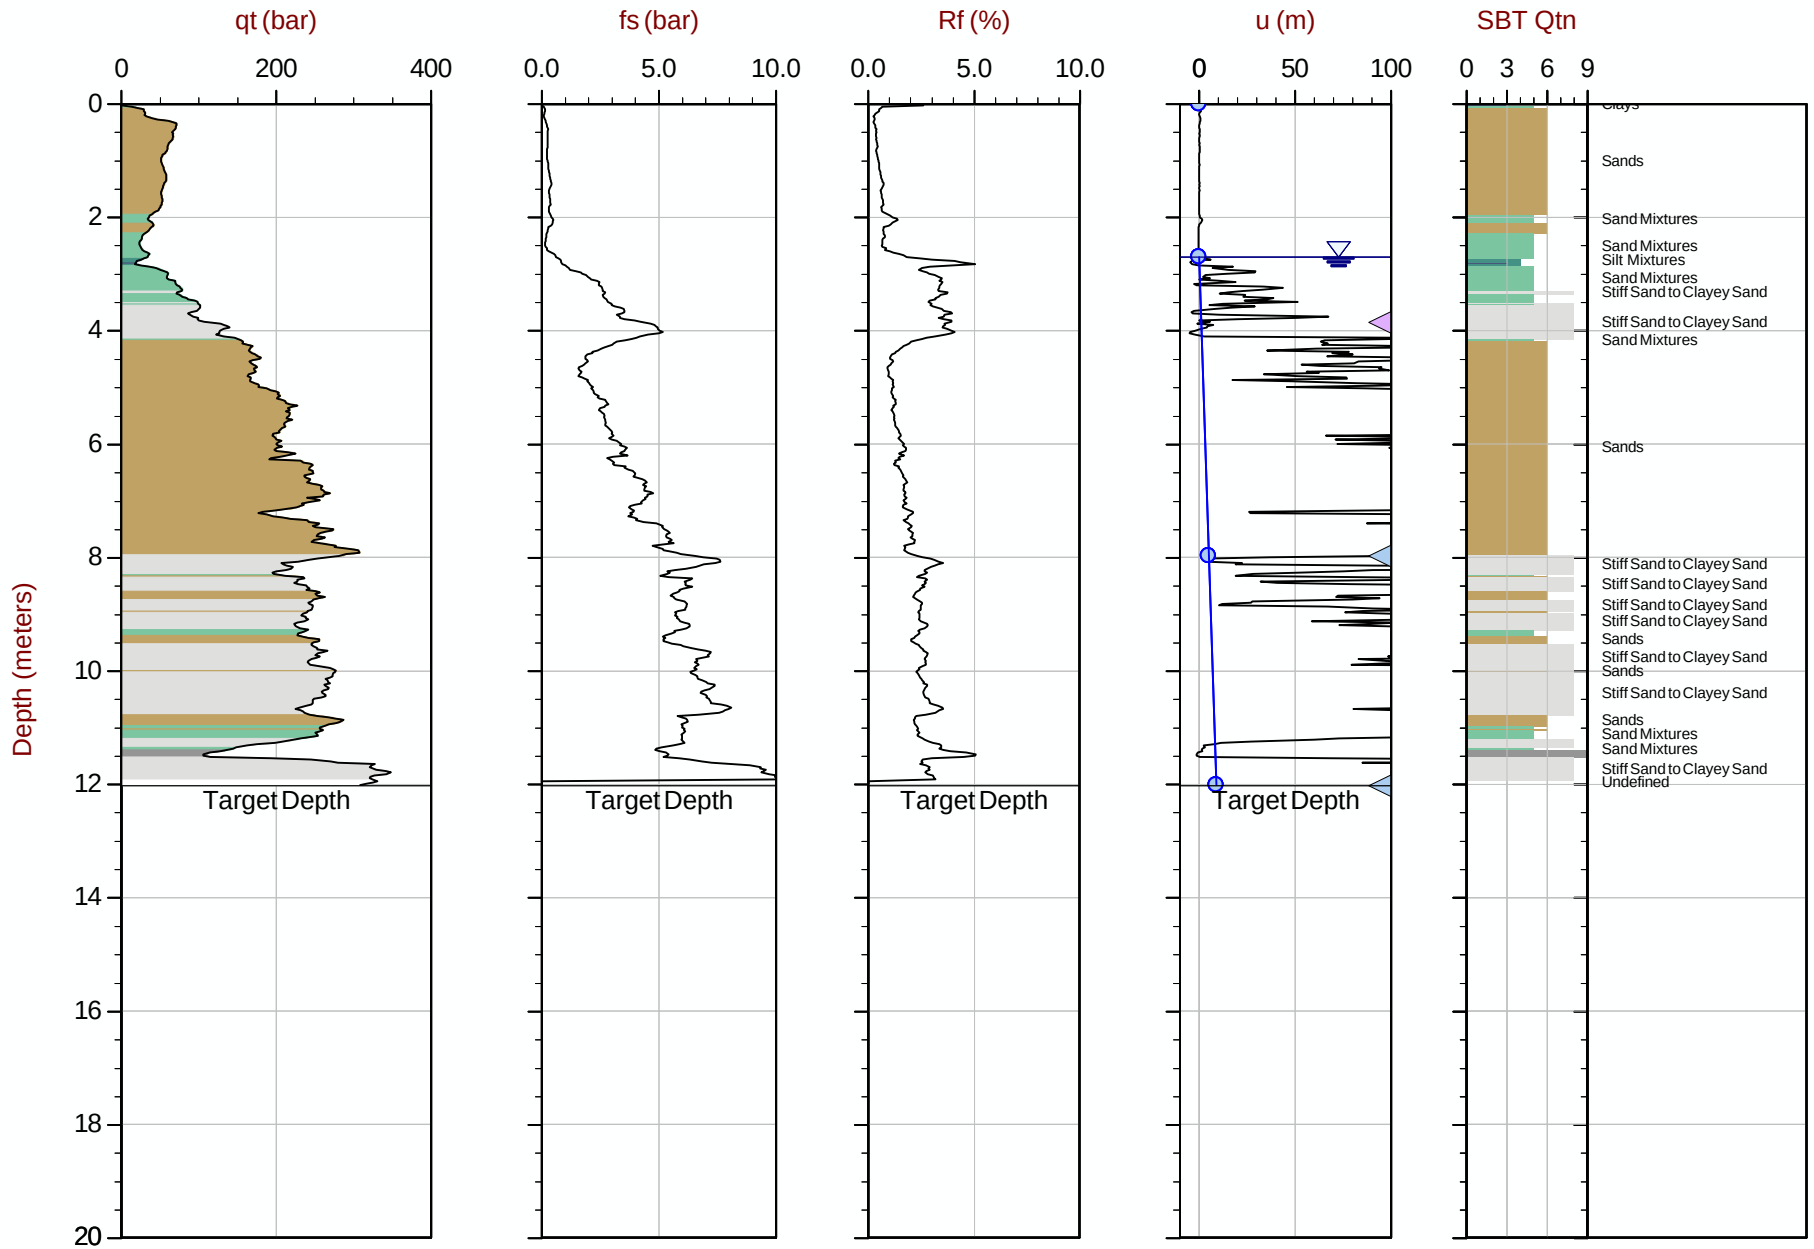

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT213.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611857m E: 416878m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 08:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT214
Cone: 854:T1500F15U35 Area= 15cm2

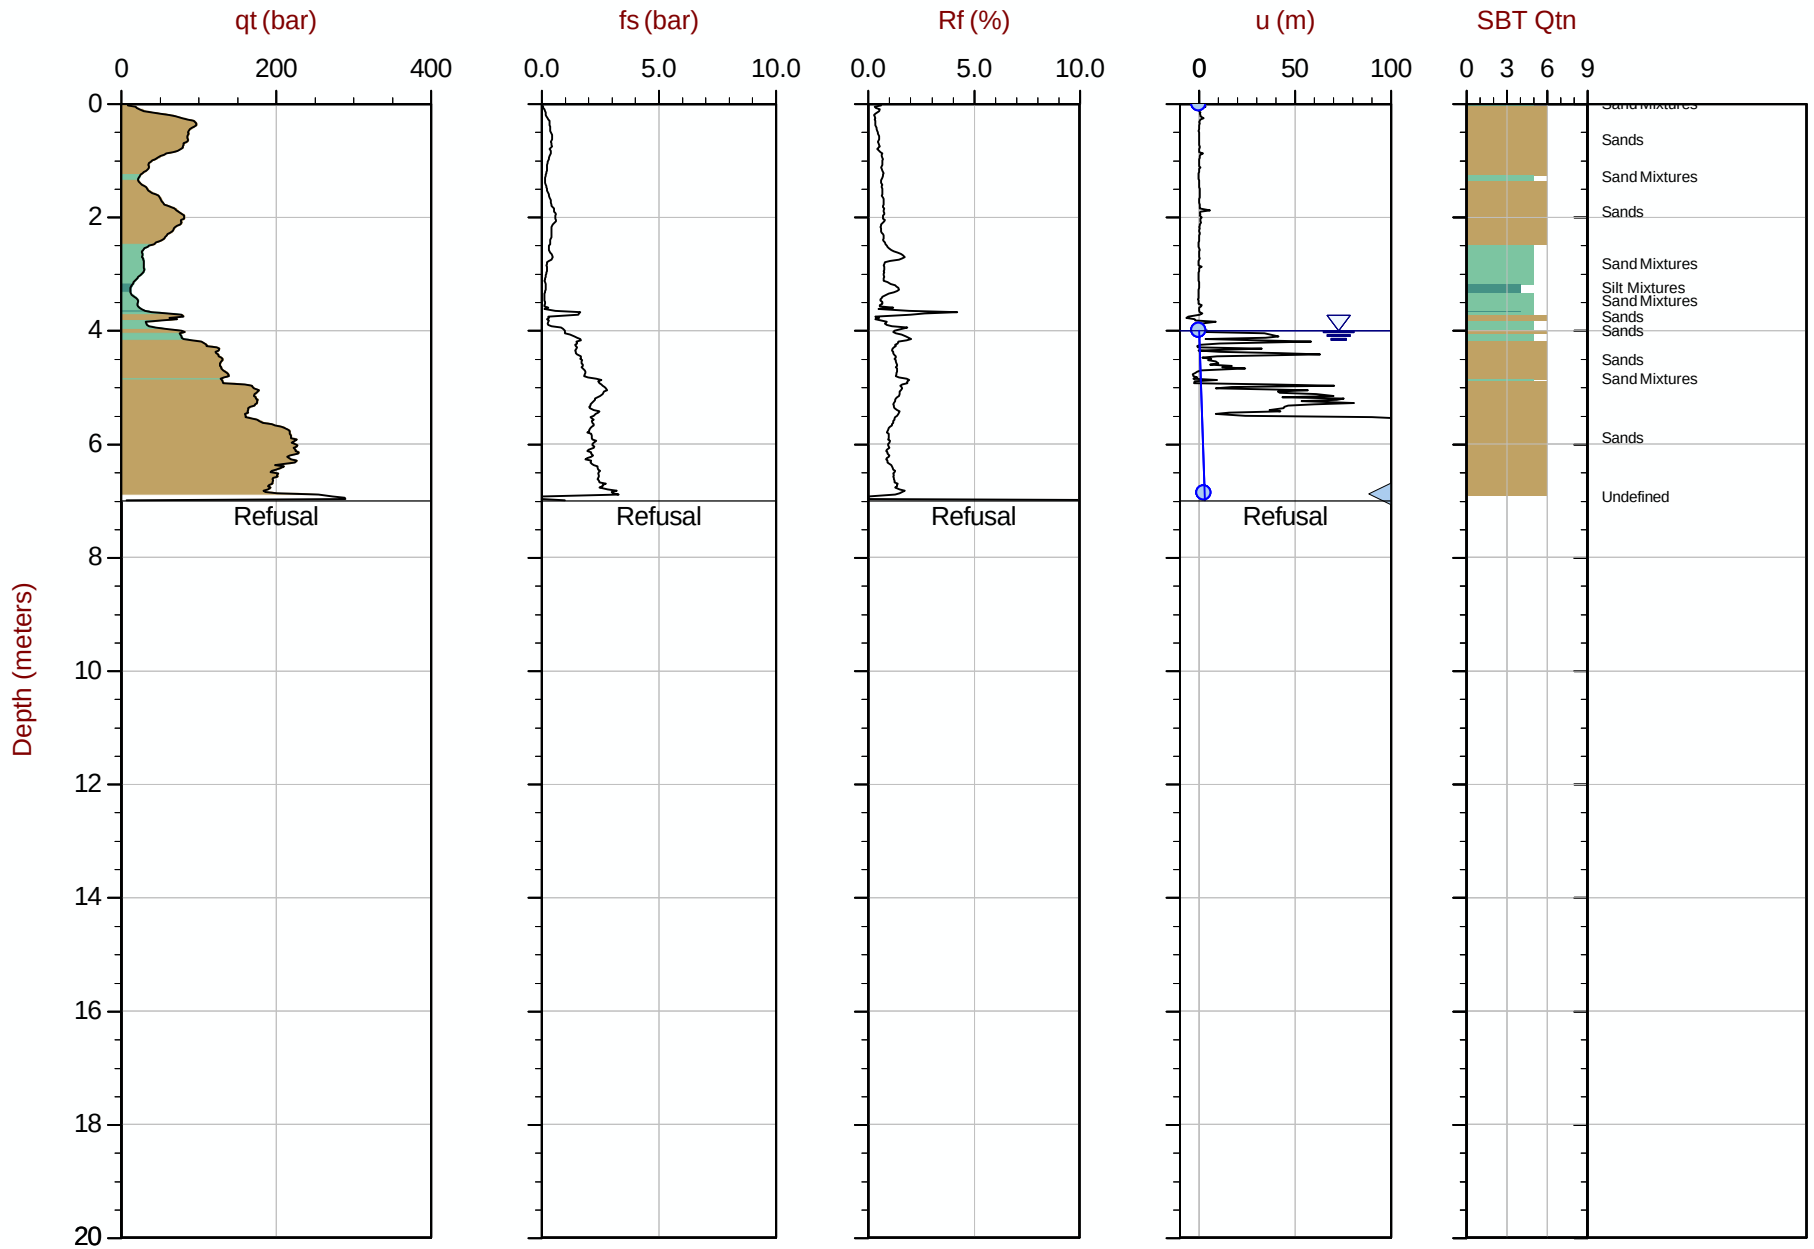

Max Depth: 7.000 m / 22.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT214.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611810m E: 416877m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 09:20
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT215
Cone: 854:T1500F15U35 Area= 15cm2

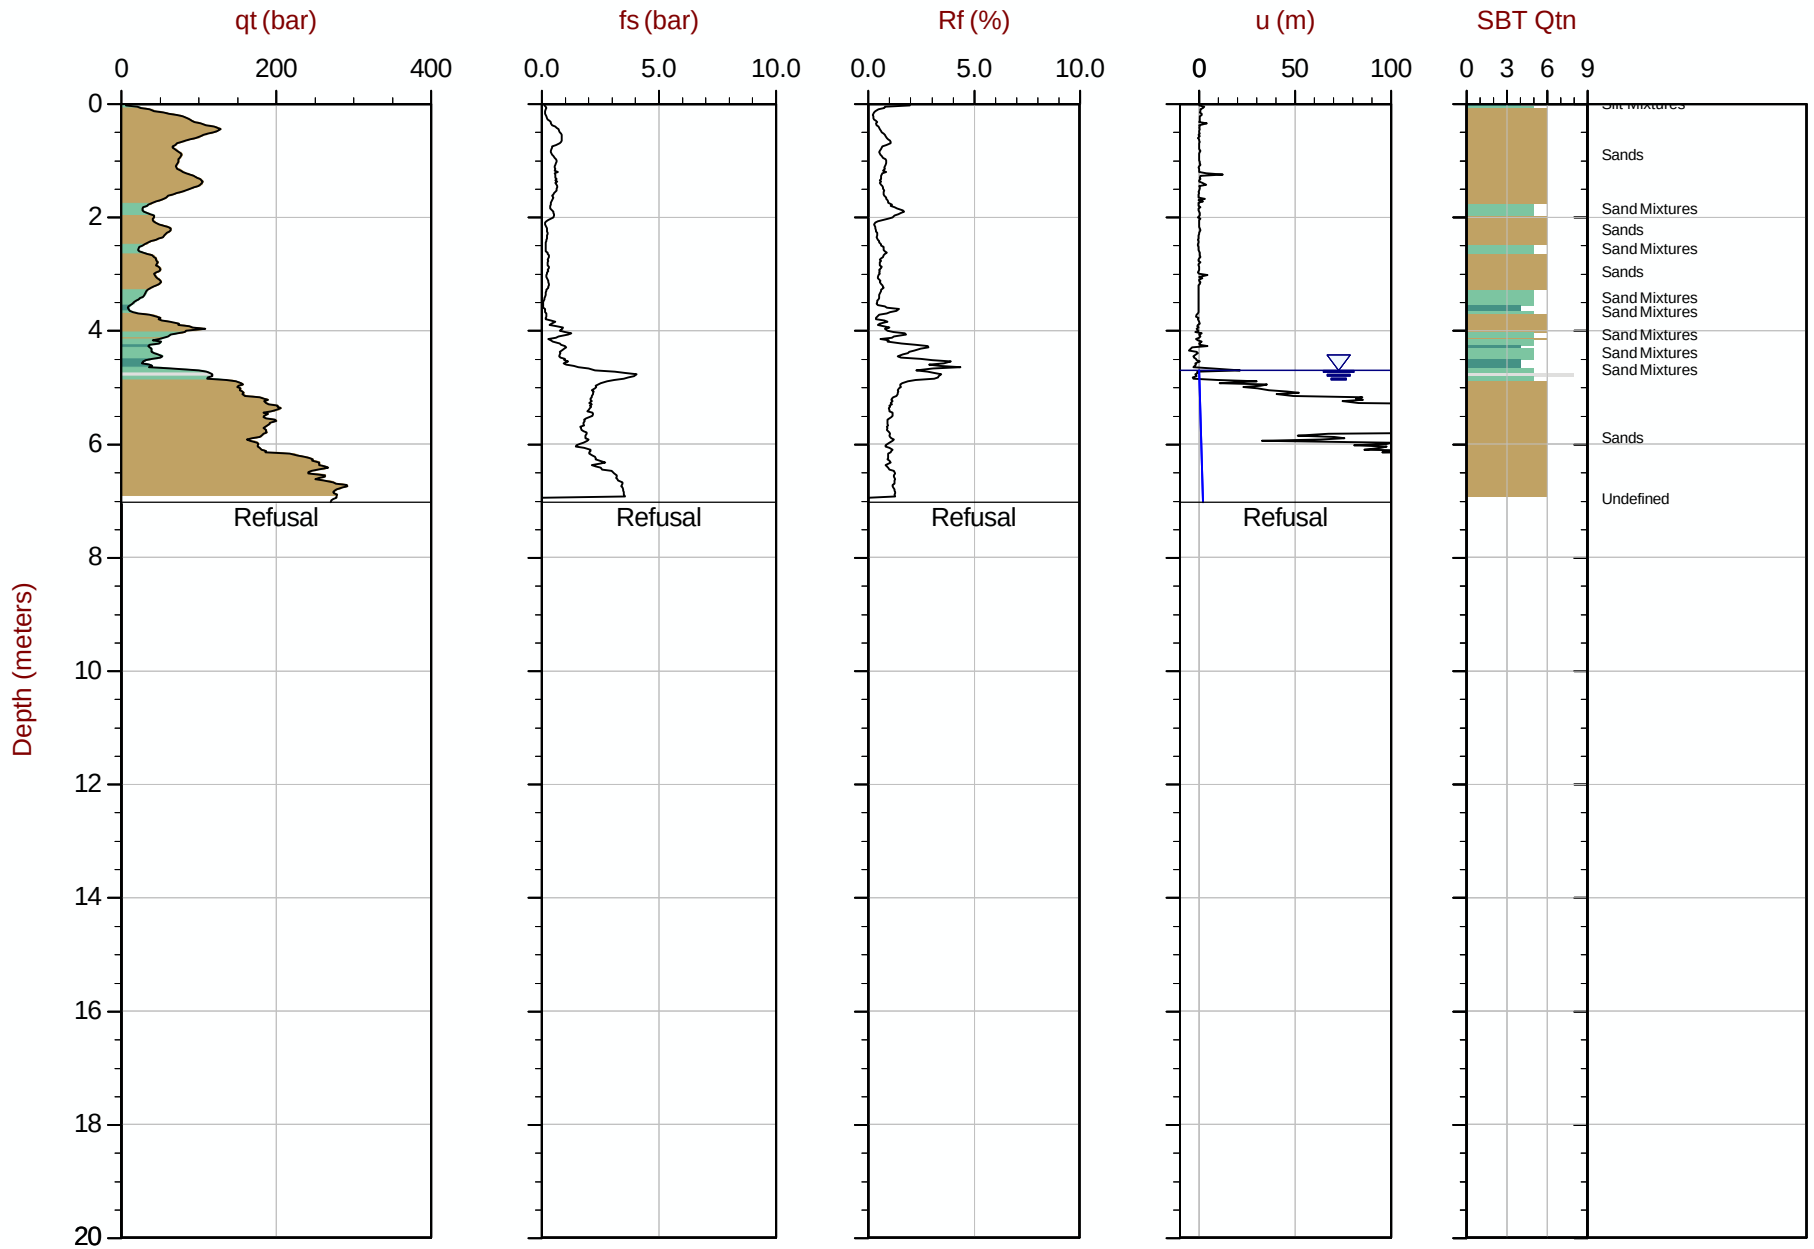

Max Depth: 7.025 m / 23.05 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT215.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611757m E: 416875m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 10:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT216
Cone: 854:T1500F15U35 Area= 15cm2

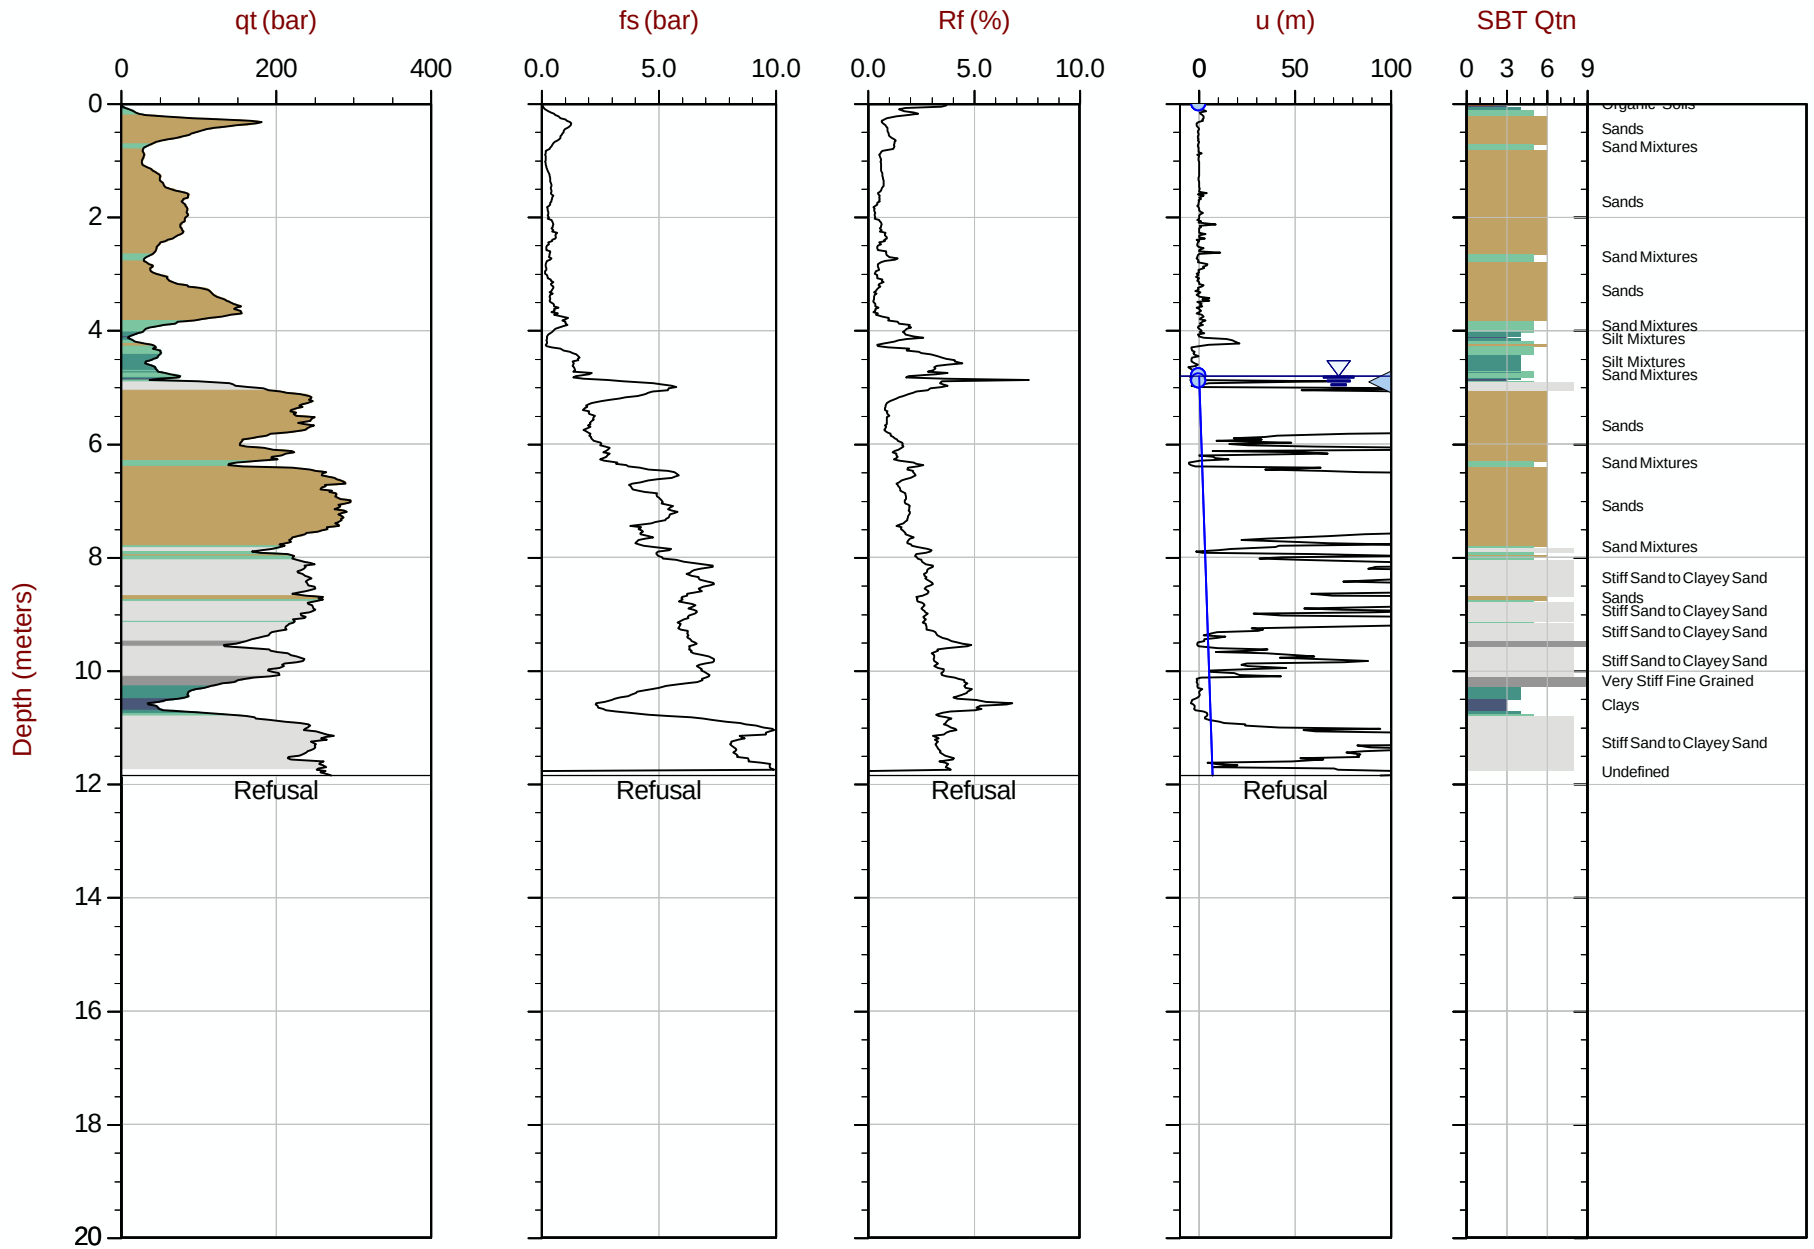

Max Depth: 11.850 m / 38.88 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT216.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611708m E: 416874m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 11:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT217
Cone: 854:T1500F15U35 Area= 15cm2

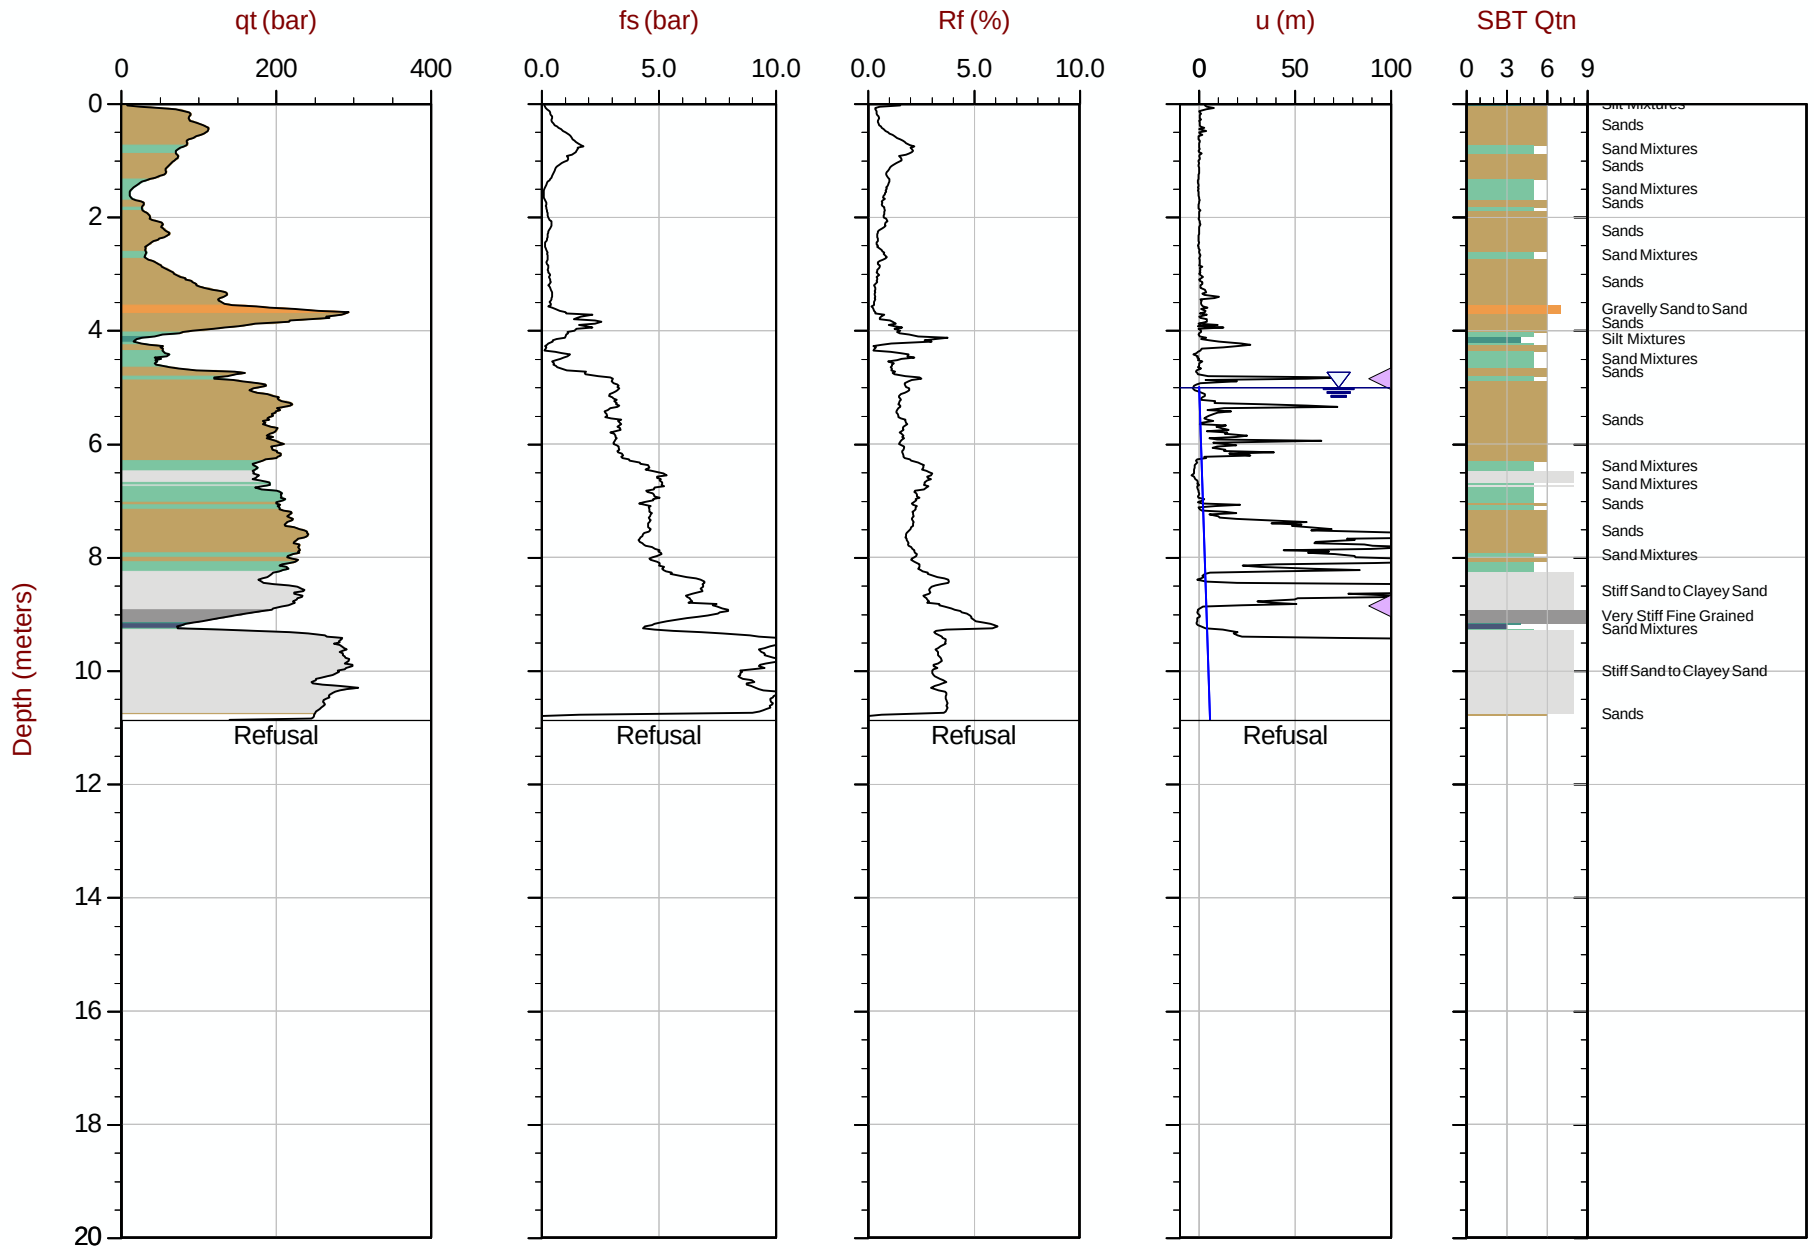

Max Depth: 10.875 m / 35.68 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT217.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611657m E: 416873m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT218
Cone: 854:T1500F15U35 Area= 15cm2

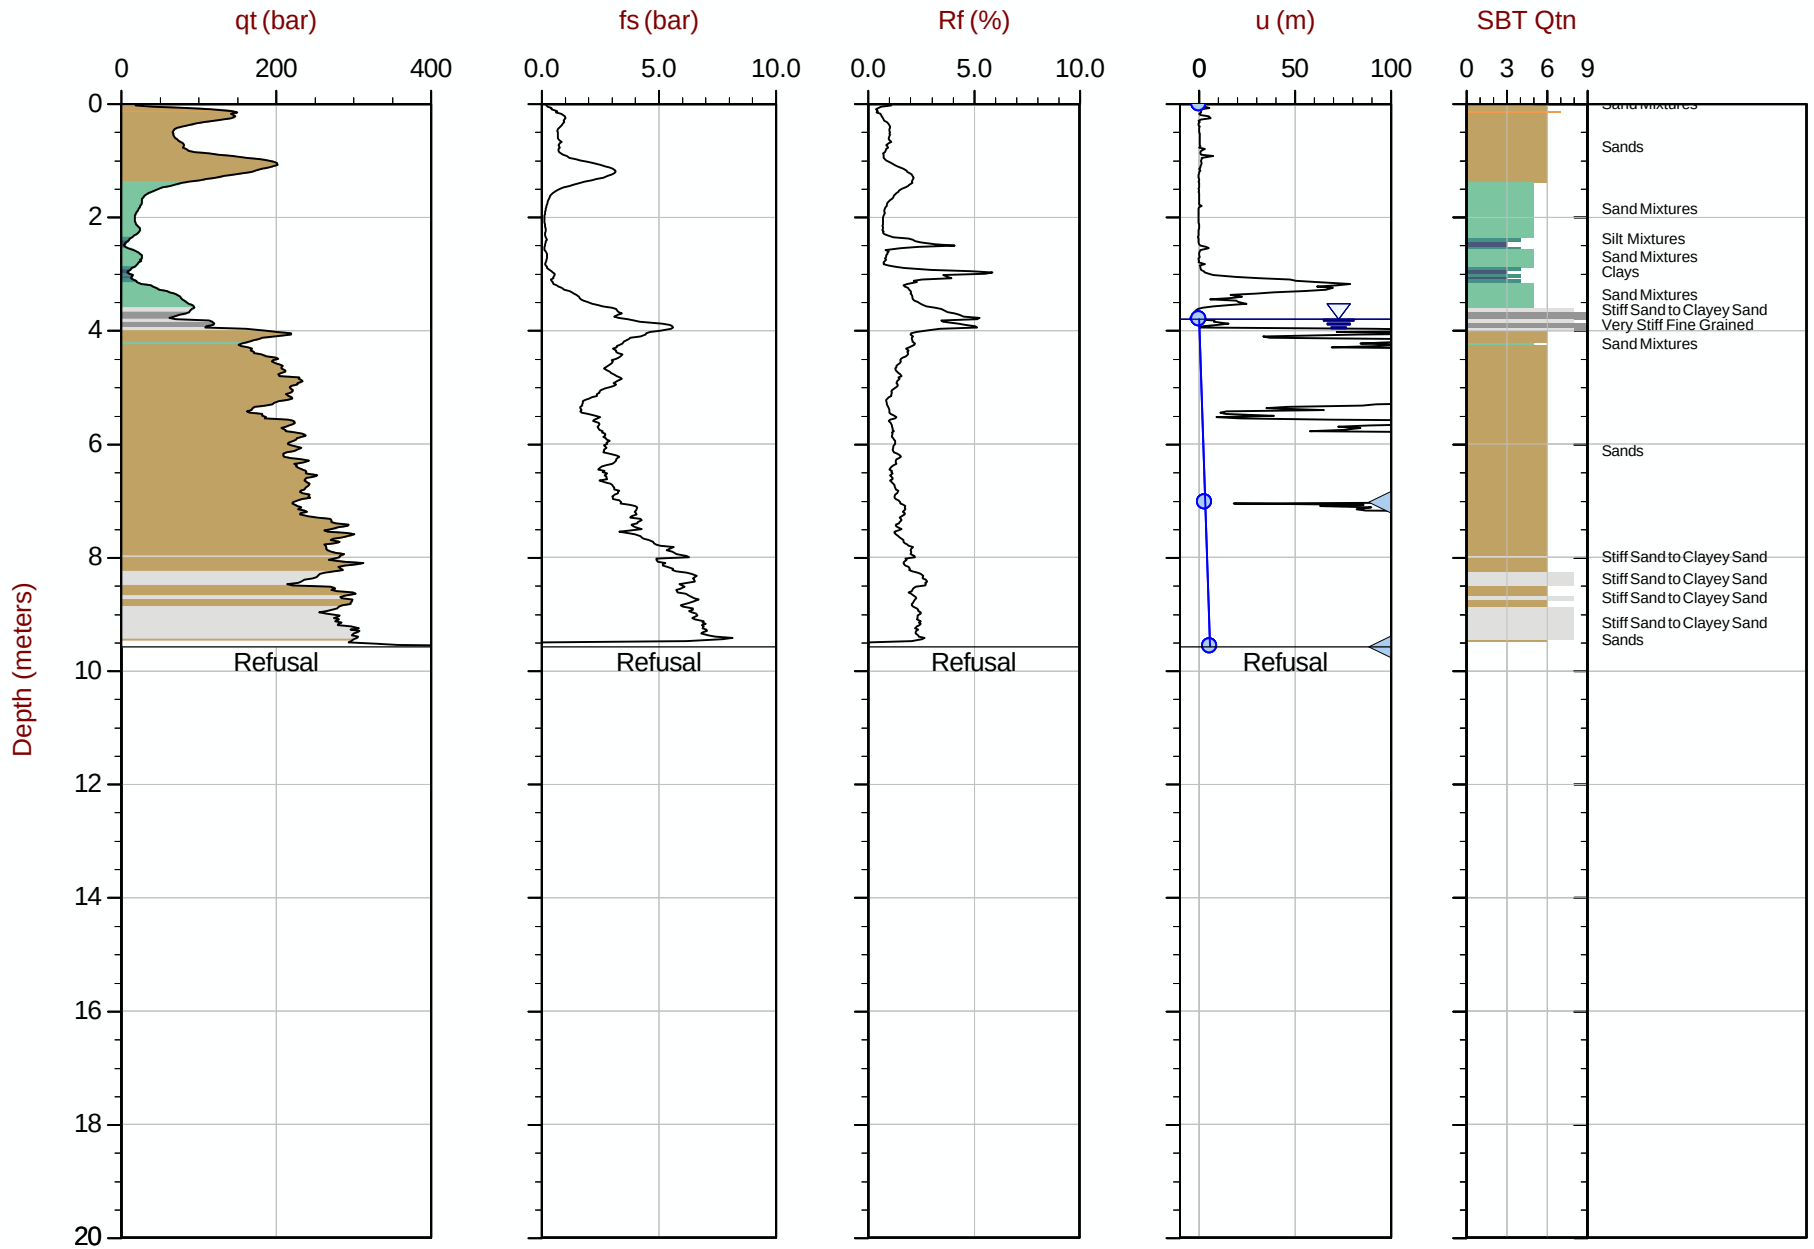

Max Depth: 9.575 m / 31.41 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT218.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611608m E: 416872m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 14:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT219
Cone: 854:T1500F15U35 Area= 15cm2

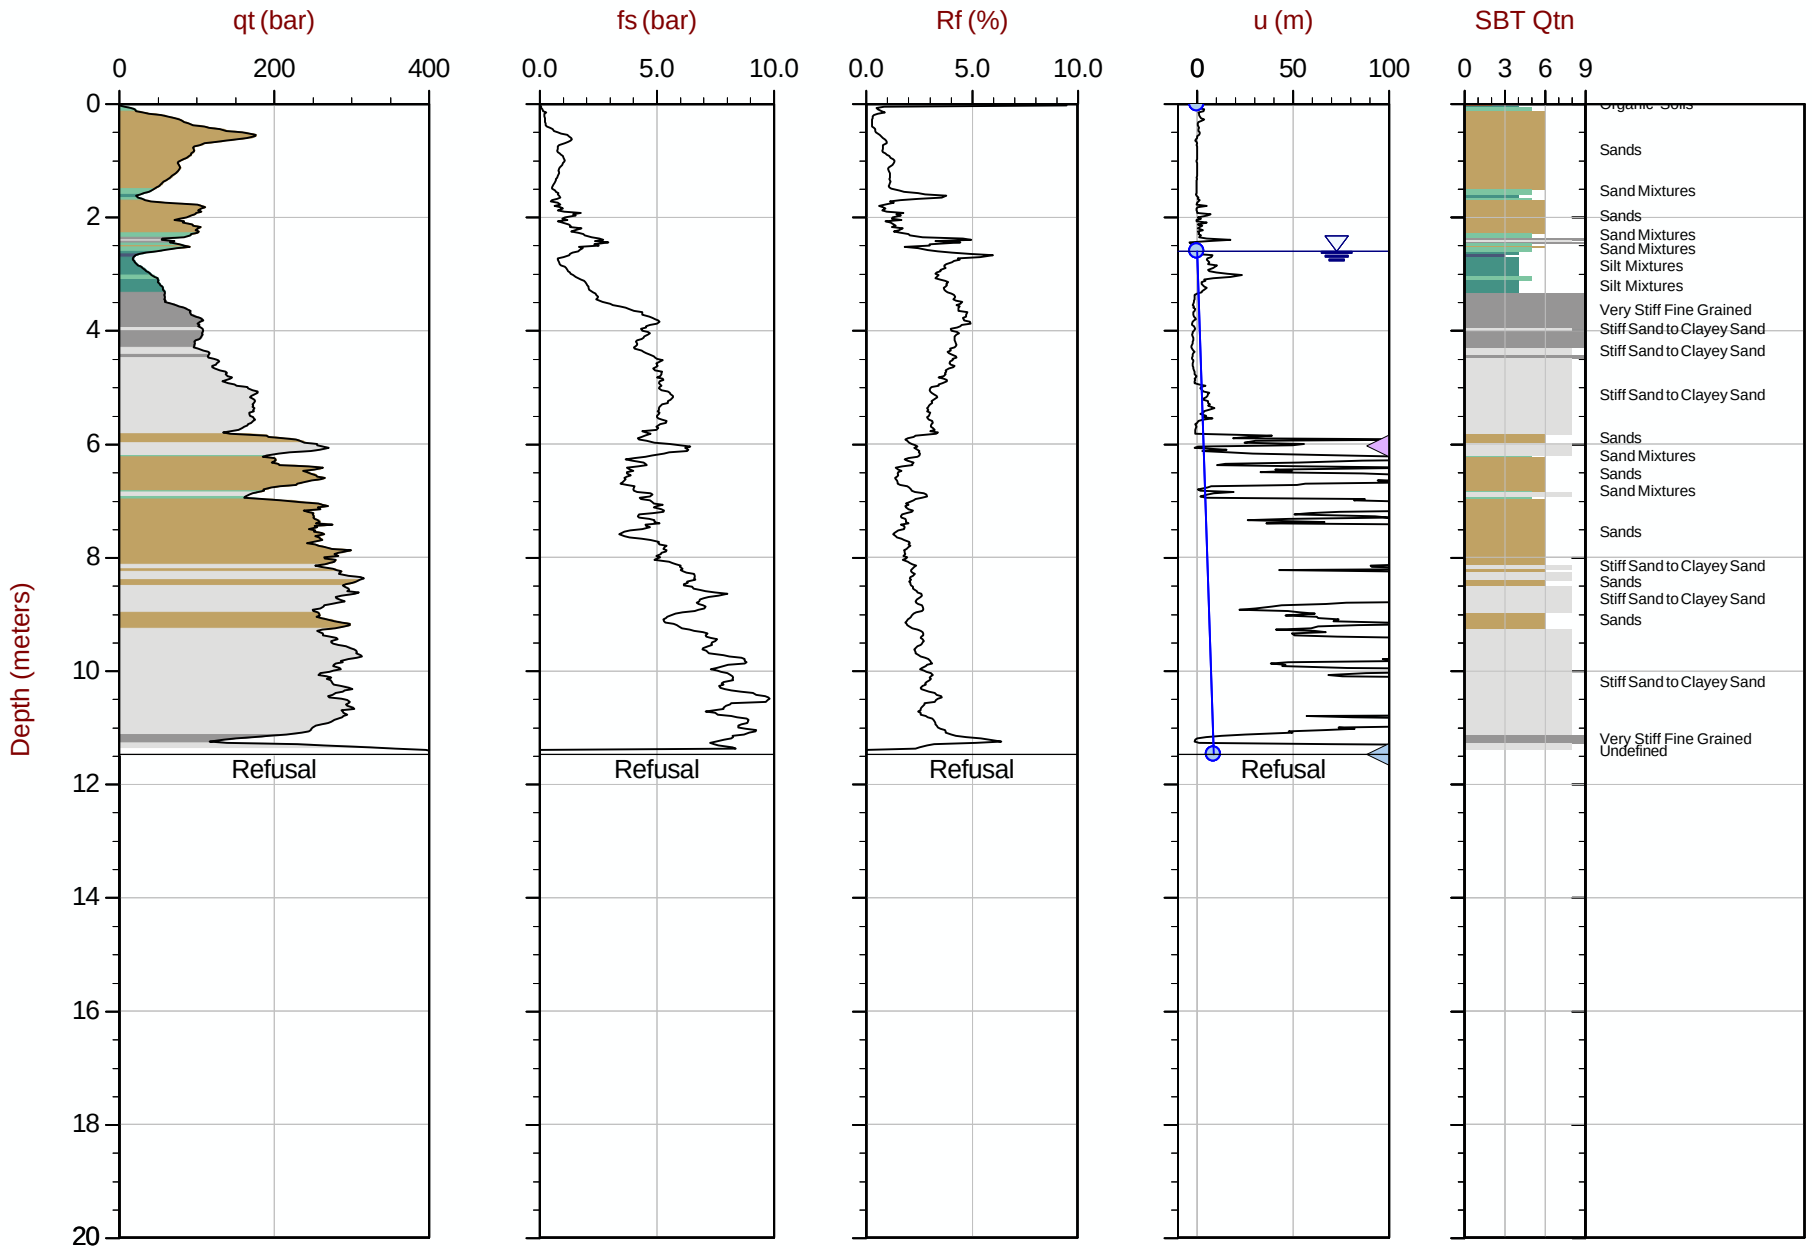

Max Depth: 11.475 m / 37.65 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT219.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611557m E: 416870m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 15:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT220
Cone: 854:T1500F15U35 Area= 15cm2

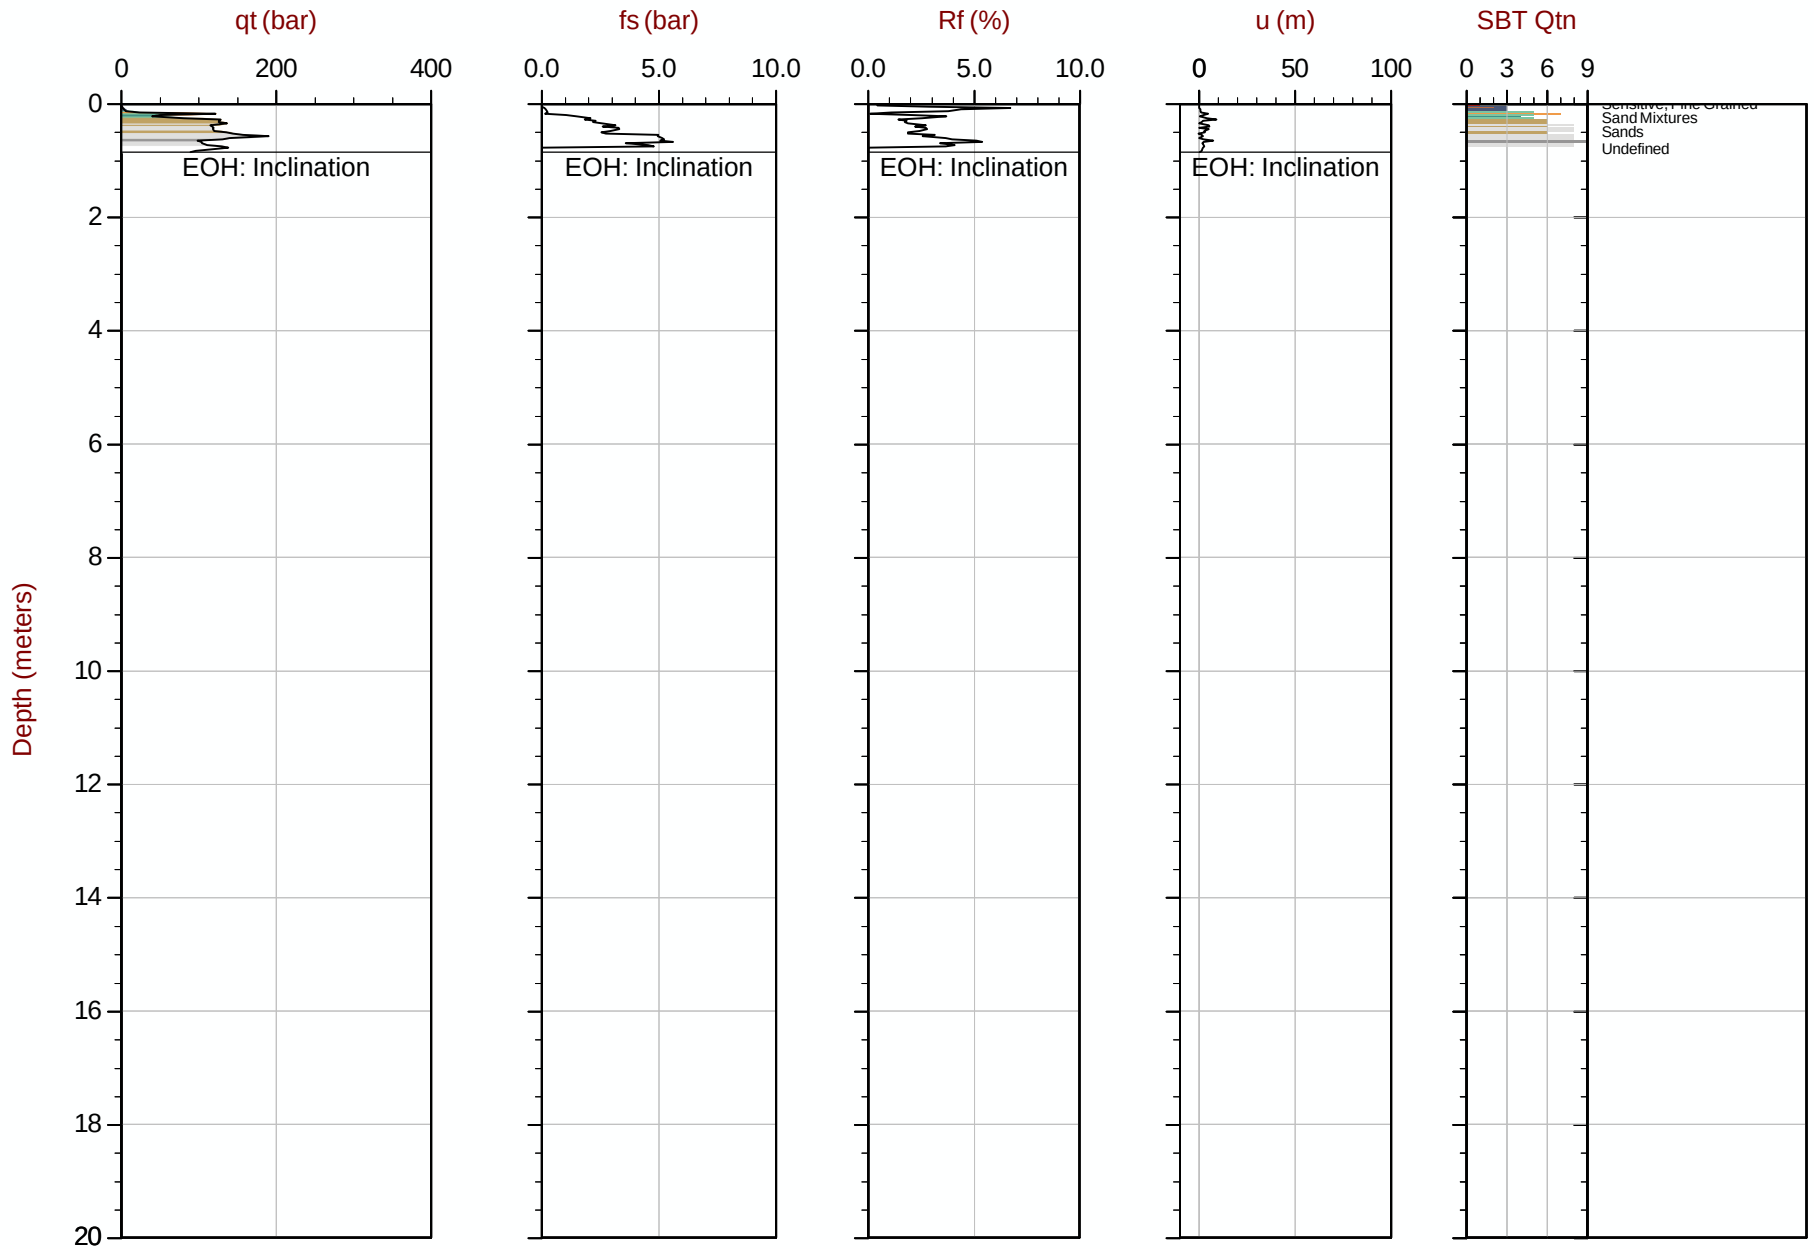

Max Depth: 0.850 m / 2.79 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT220.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611508m E: 416869m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 16:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT220B
Cone: 854:T1500F15U35 Area= 15cm2

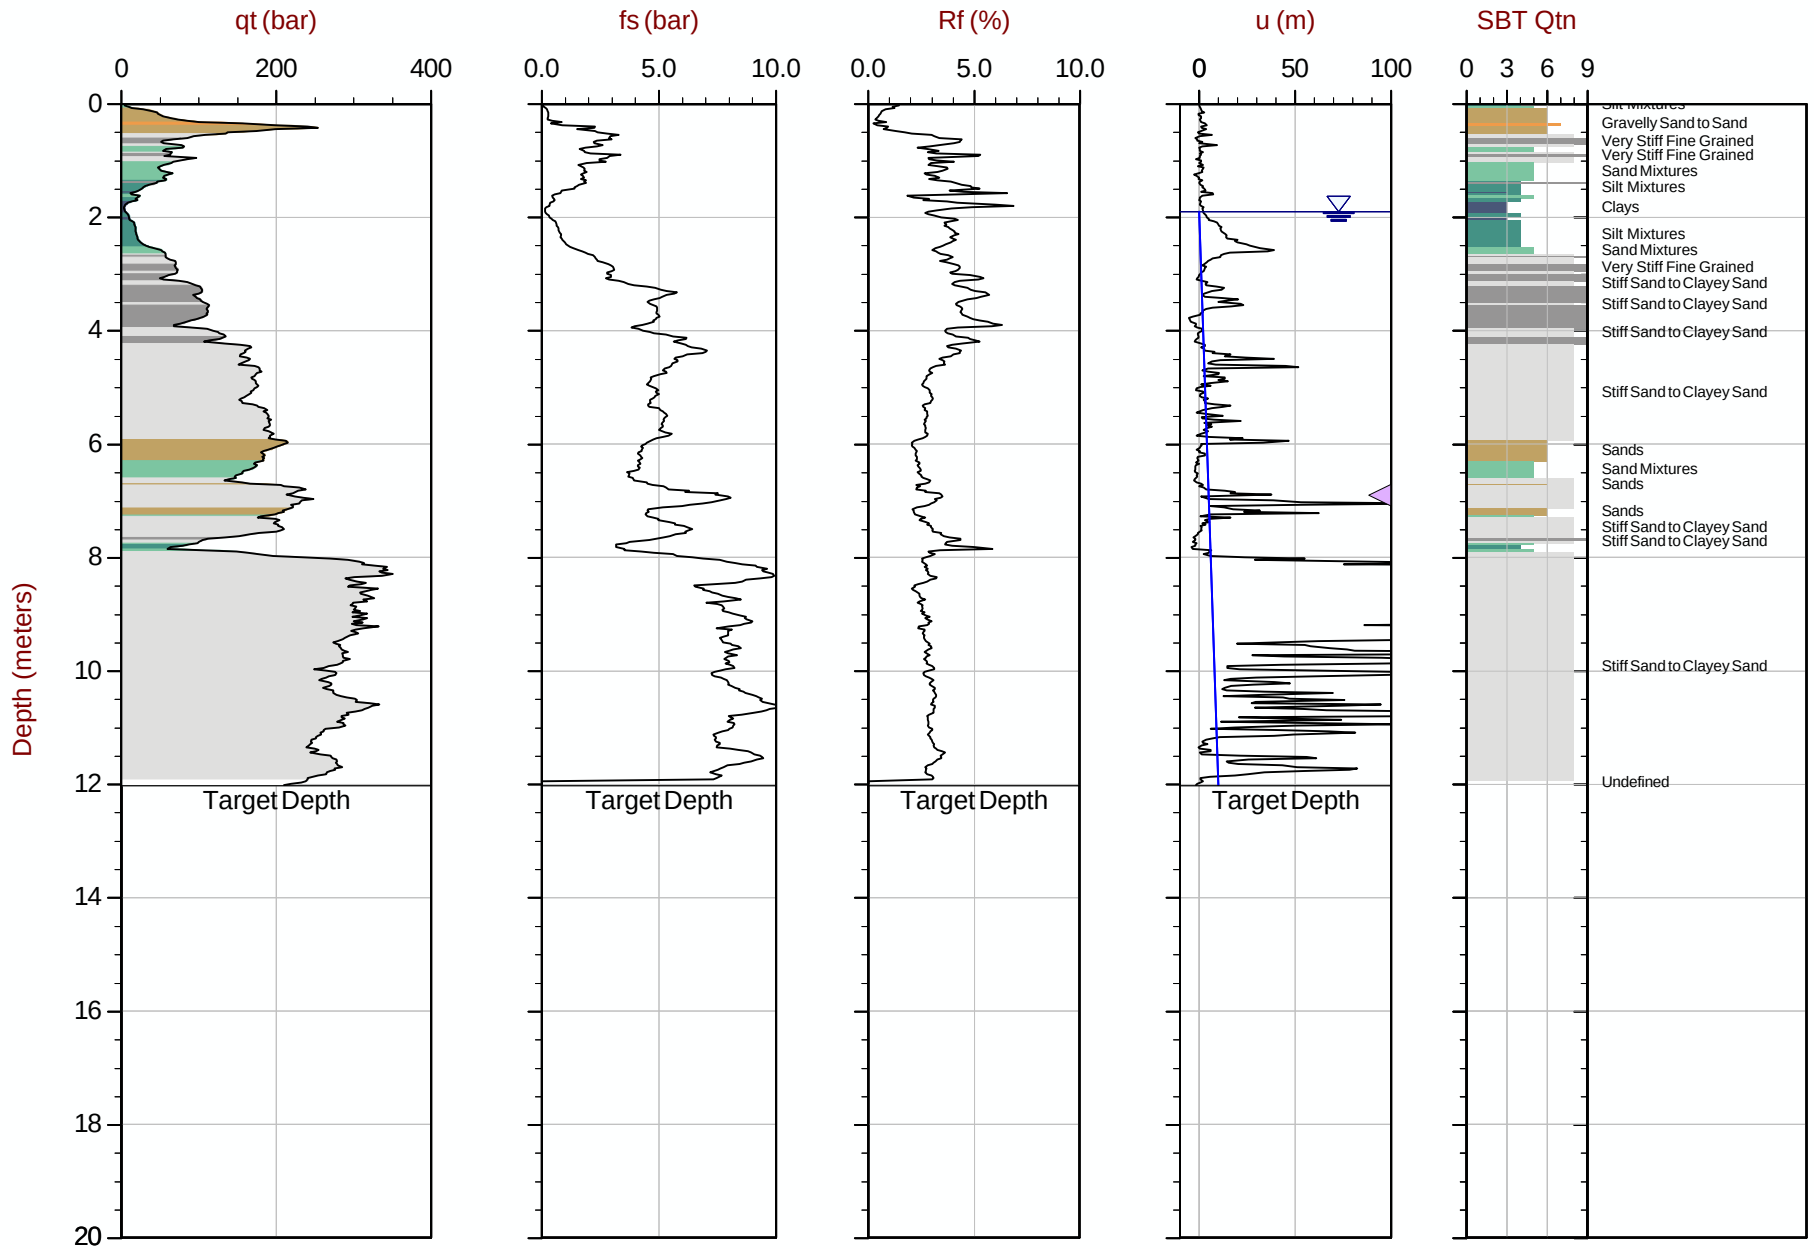

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT220B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611509m E: 416869m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 17:44
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT221
Cone: 854:T1500F15U35 Area= 15cm2

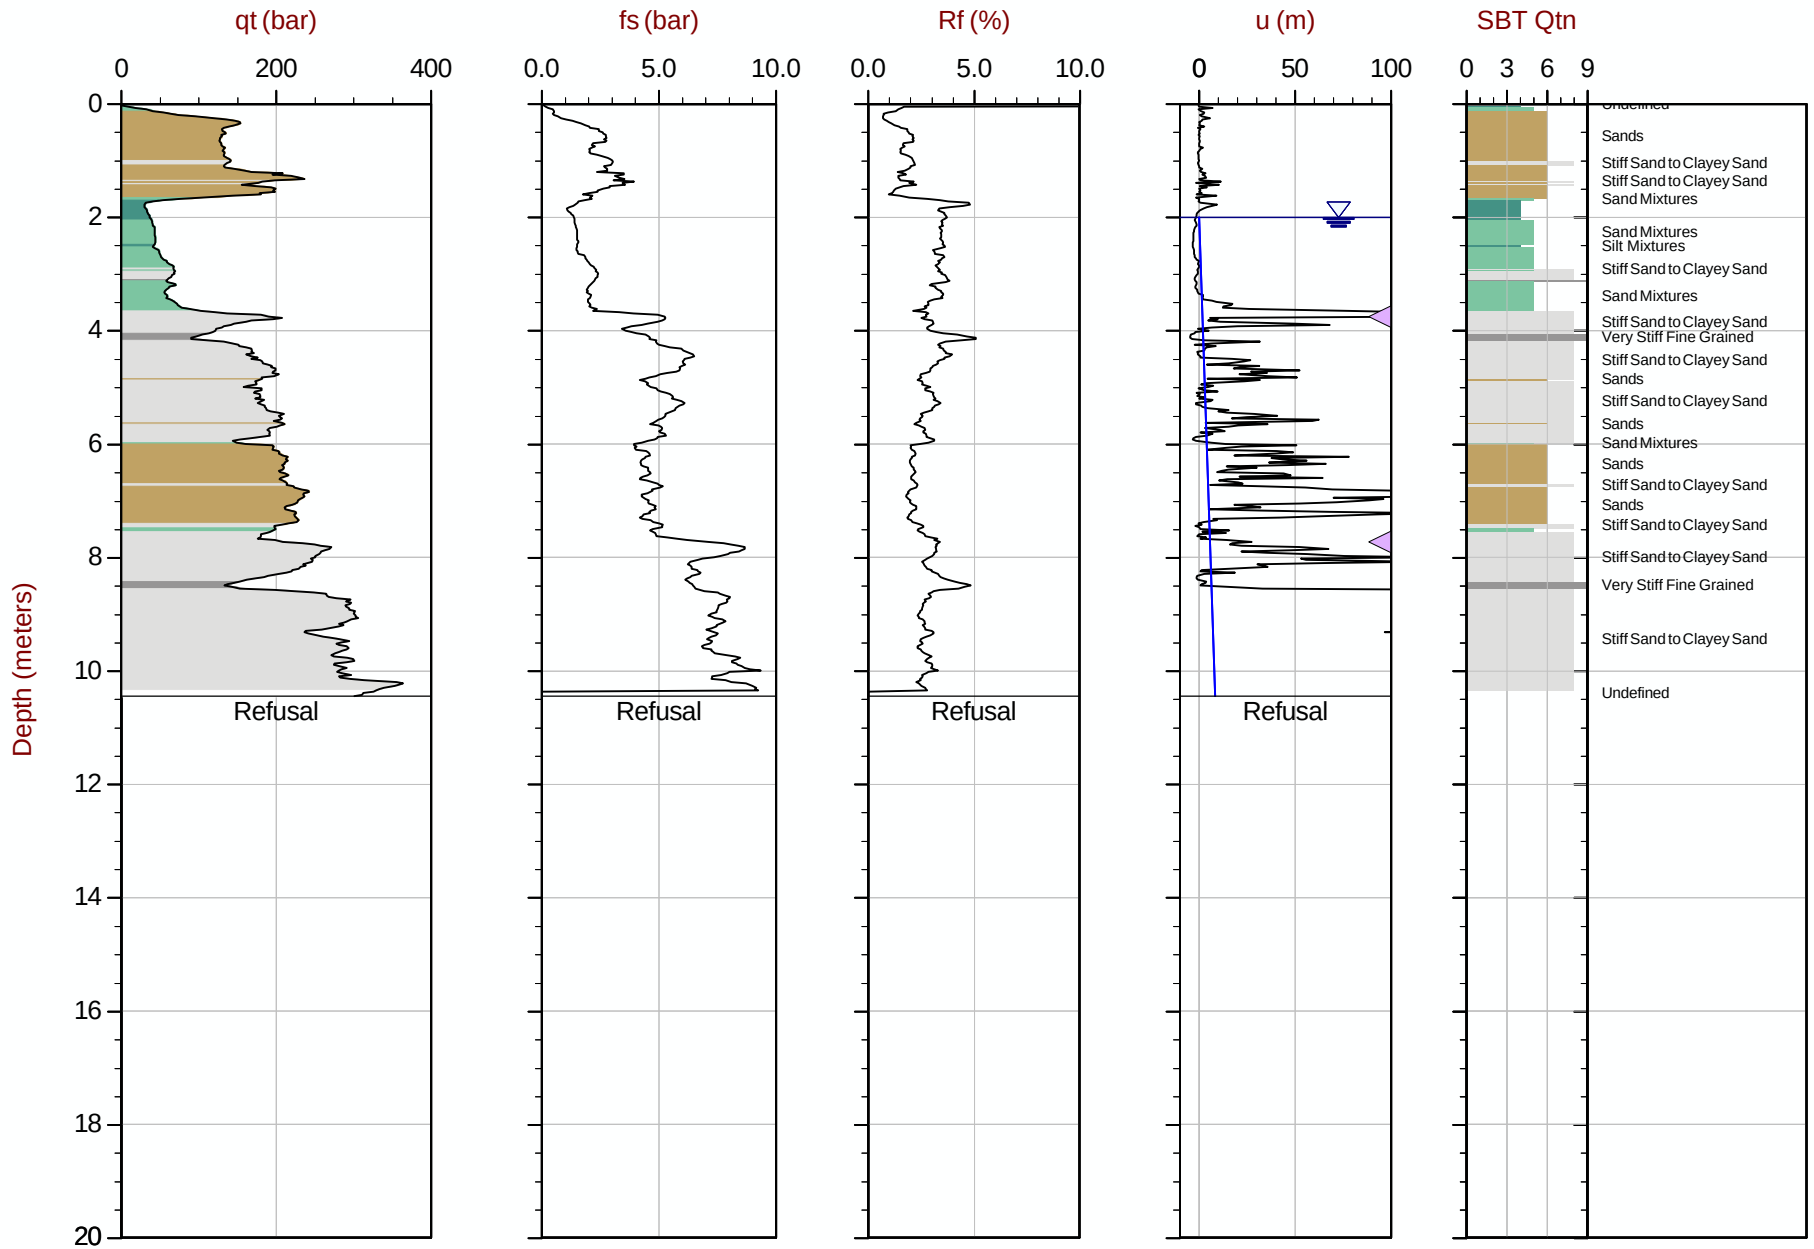

Max Depth: 10.450 m / 34.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT221.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611457m E: 416868m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 06:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT222
Cone: 854:T1500F15U35 Area= 15cm2

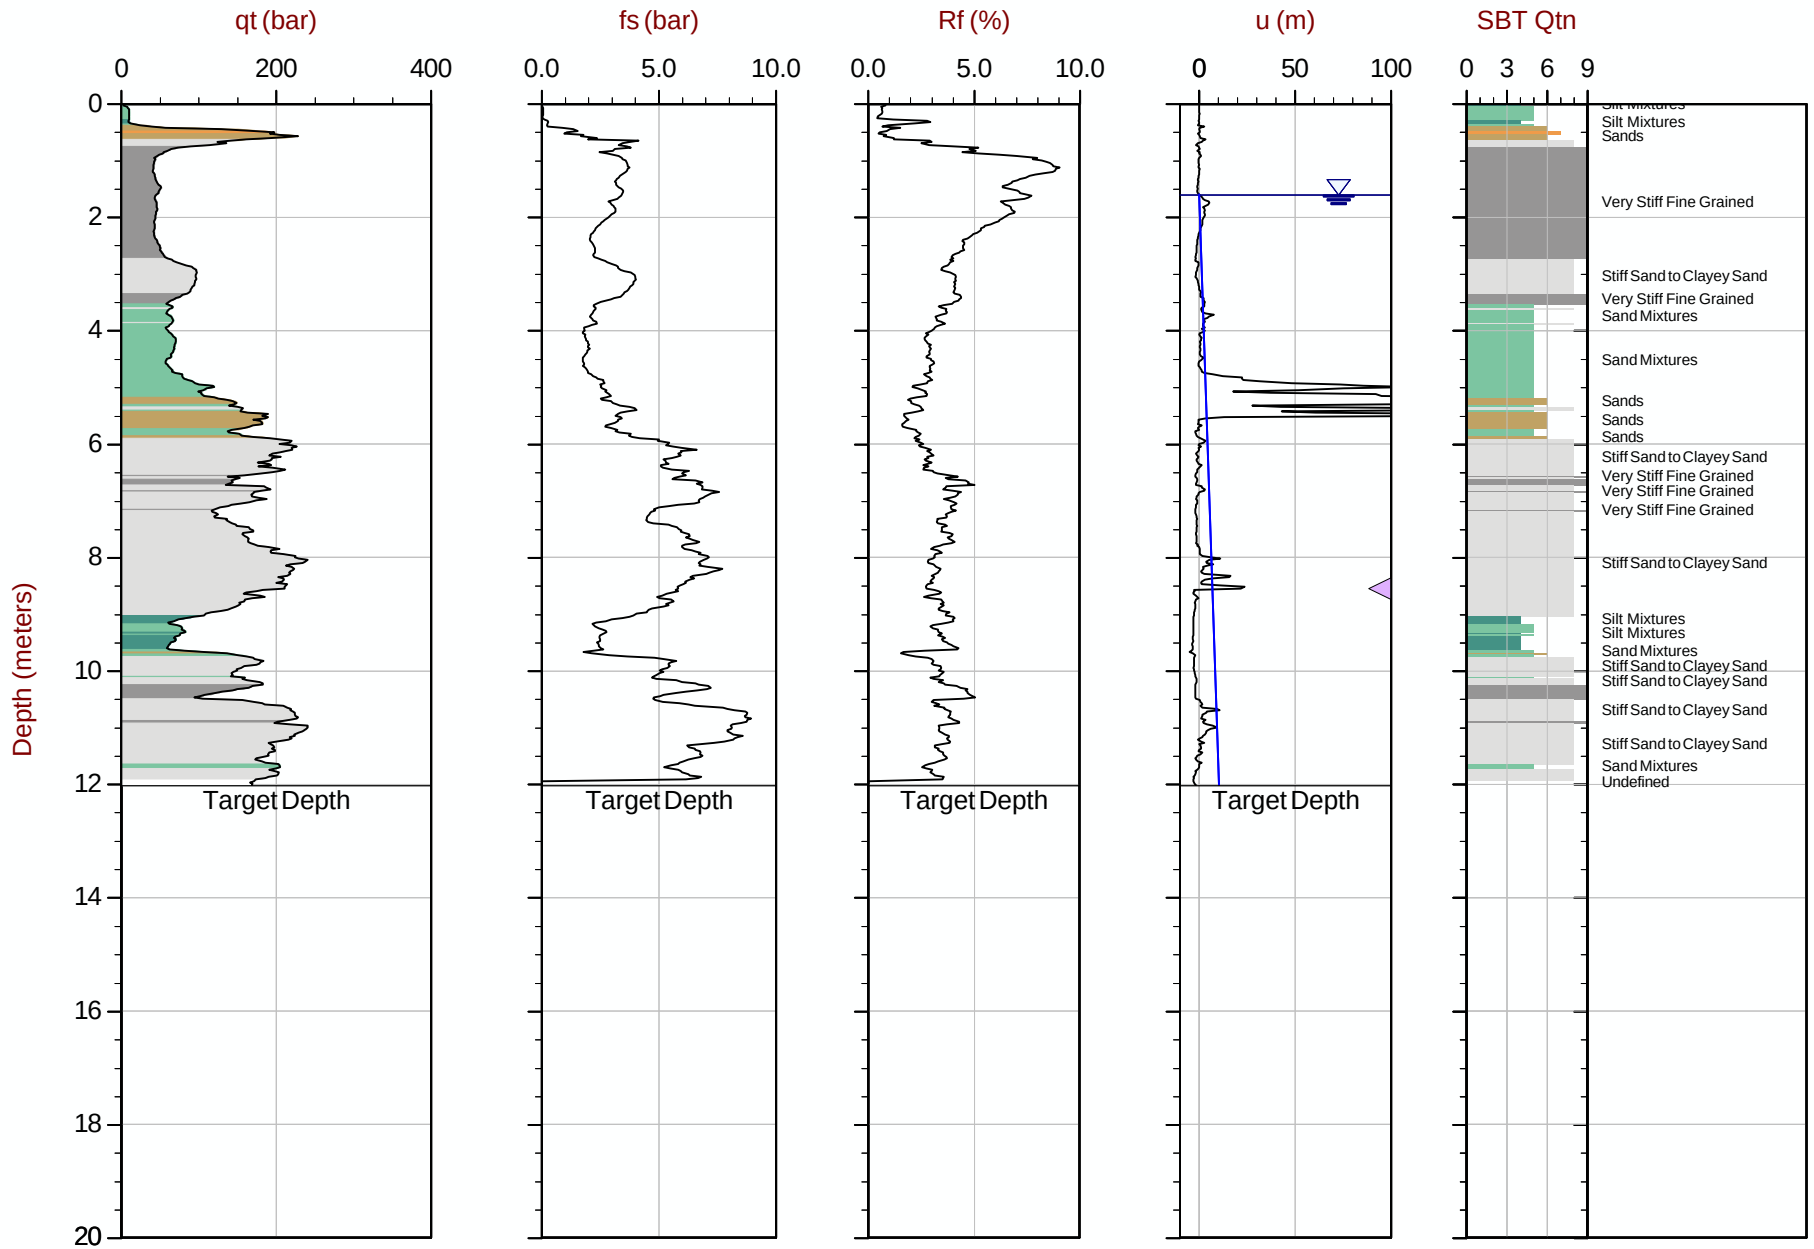

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT222.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611408m E: 416867m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 07:33
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT223
Cone: 854:T1500F15U35 Area= 15cm2

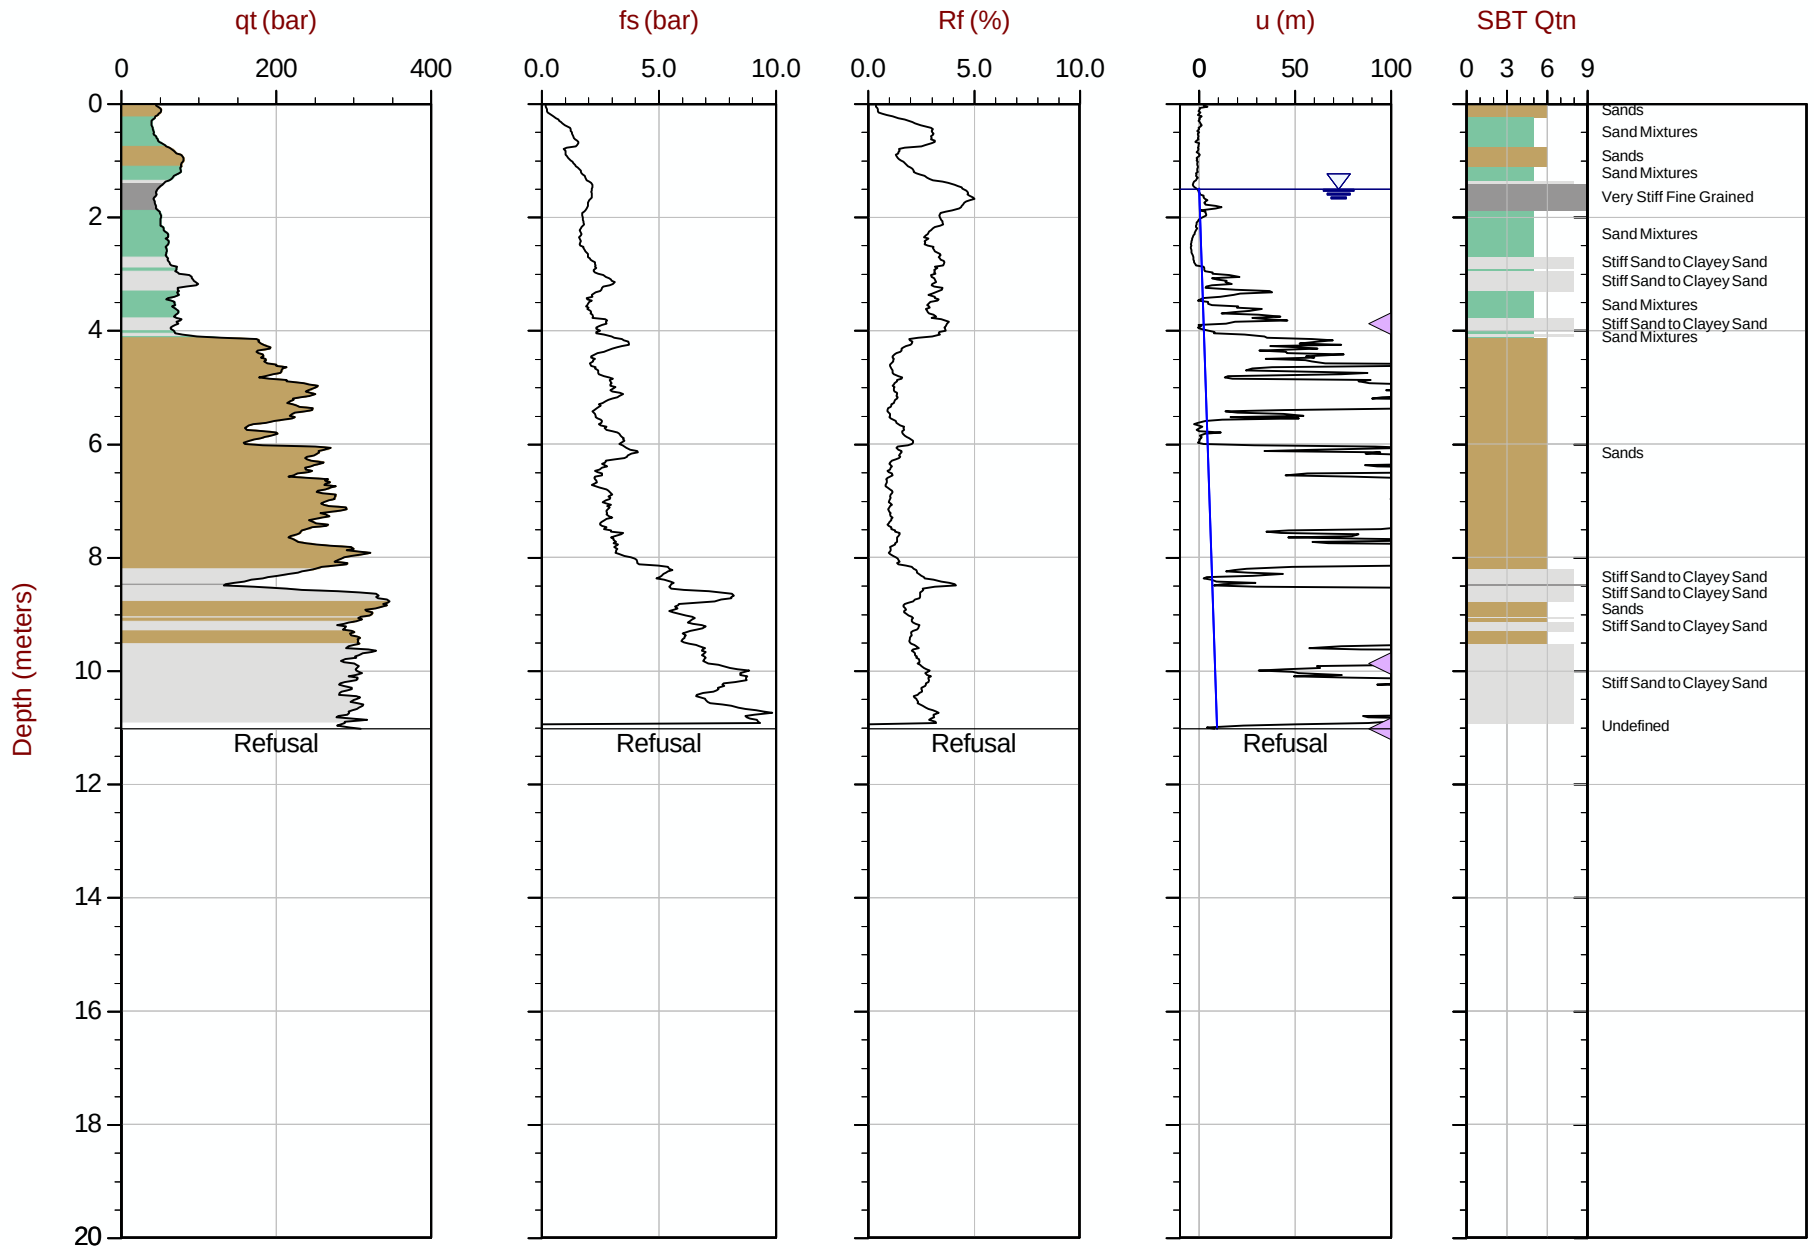

Max Depth: 11.025 m / 36.17 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT223.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611357m E: 416865m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 09:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT224
Cone: 854:T1500F15U35 Area= 15cm2

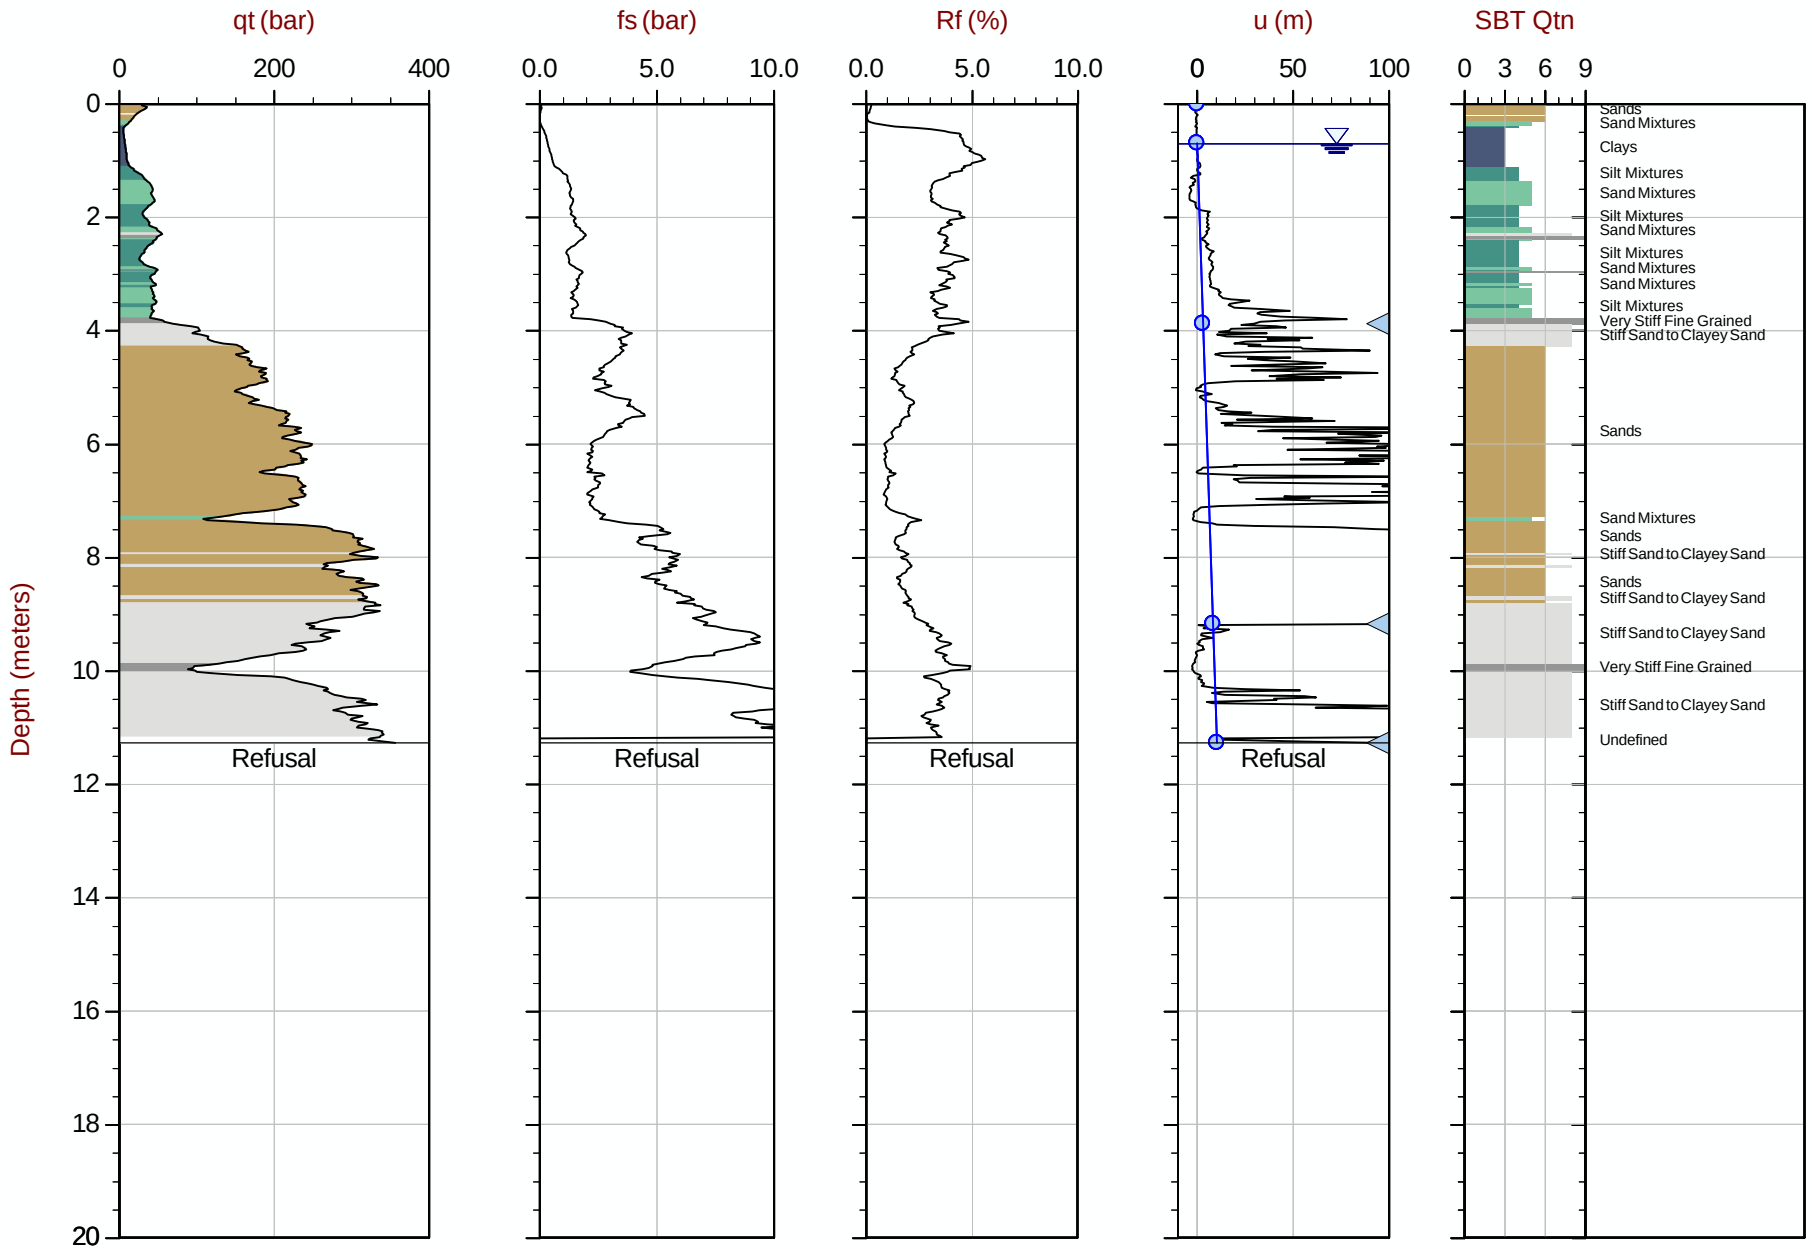

Max Depth: 11.275 m / 36.99 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT224.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611308m E: 416864m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 06:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT225
Cone: 821:T1000F10U35 Area= 15cm2

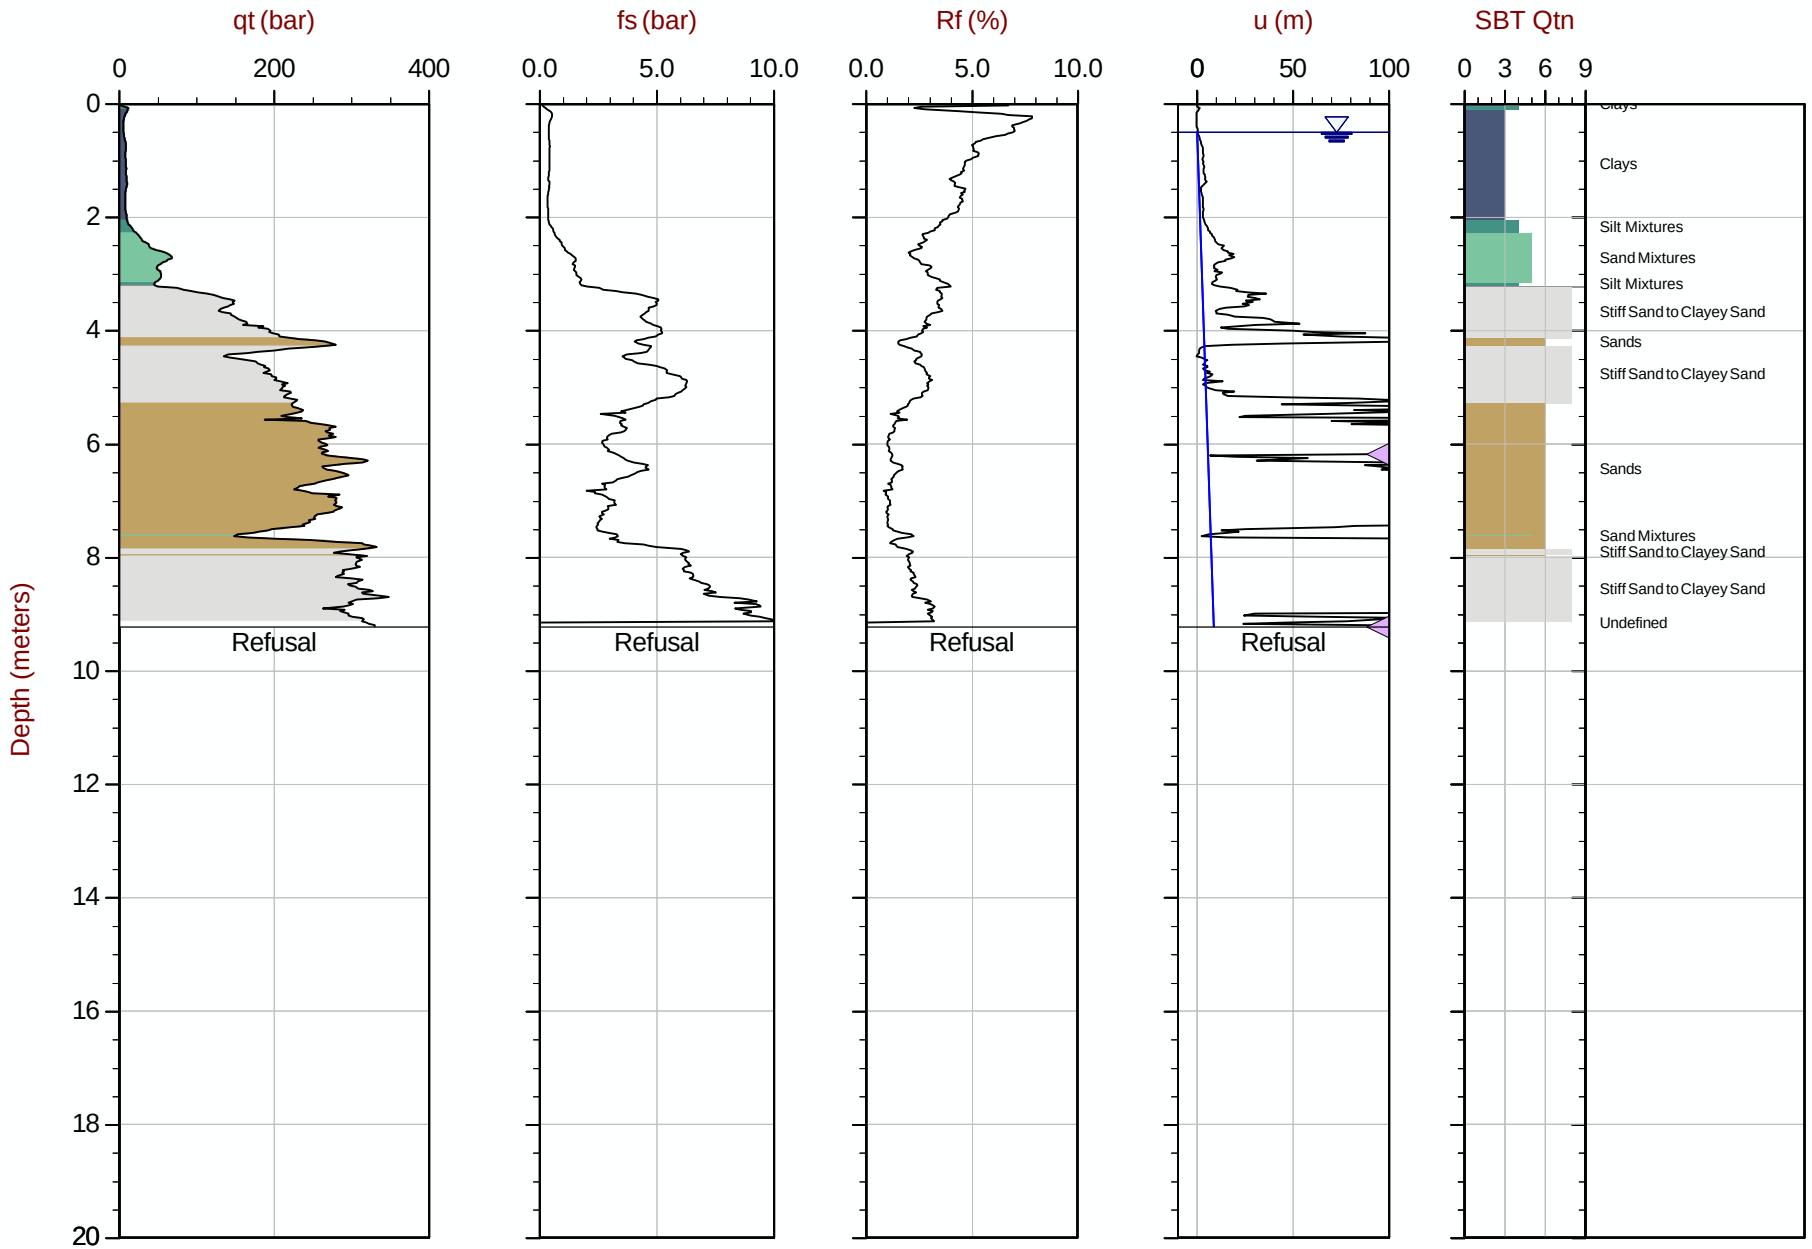

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT225.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611257m E: 416863m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 11:08
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT226
Cone: 854:T1500F15U35 Area= 15cm2

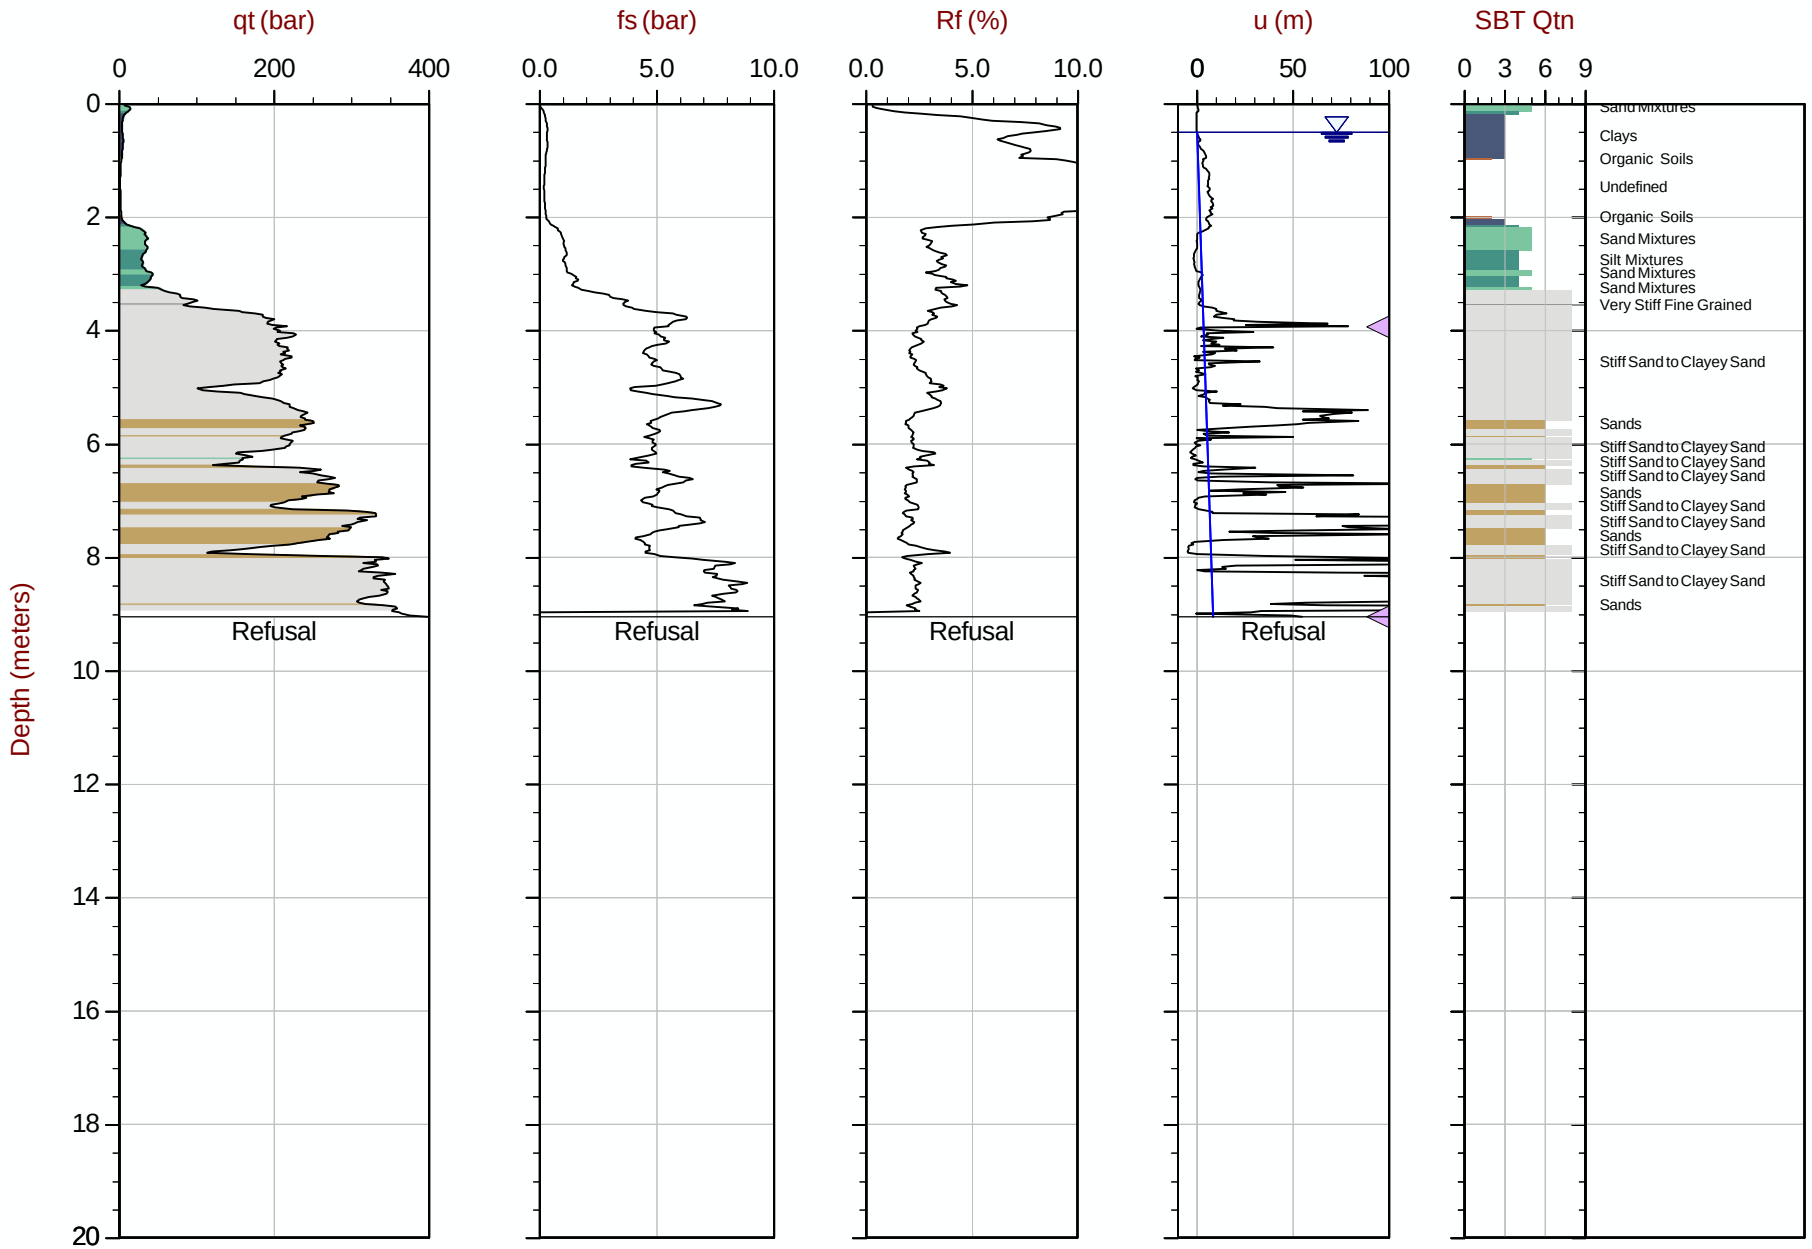

Max Depth: 9.050 m / 29.69 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT226.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611208m E: 416862m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 12:42
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT227
Cone: 854:T1500F15U35 Area= 15cm2

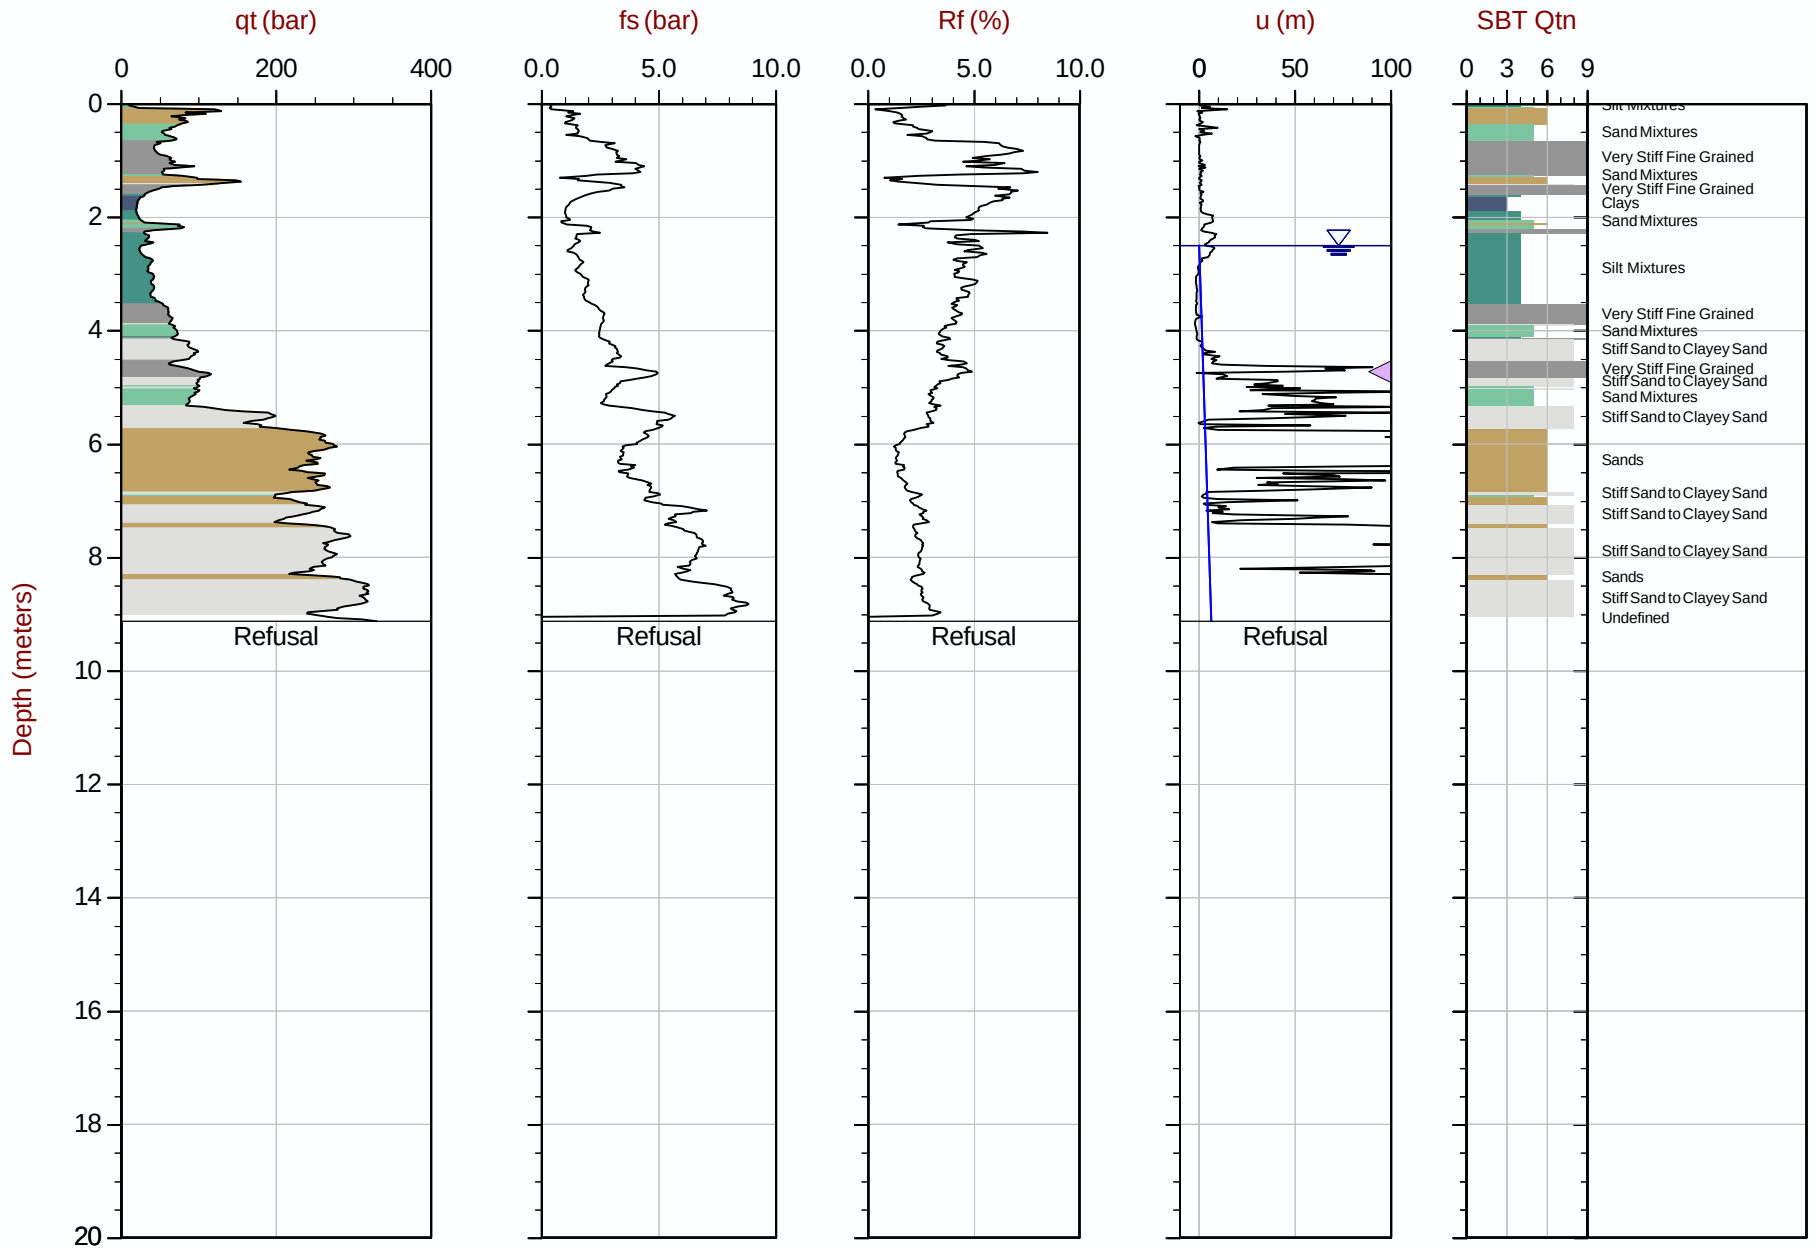

Max Depth: 9.125 m / 29.94 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT227.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611150m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 13:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228
Cone: 854:T1500F15U35 Area= 15cm2

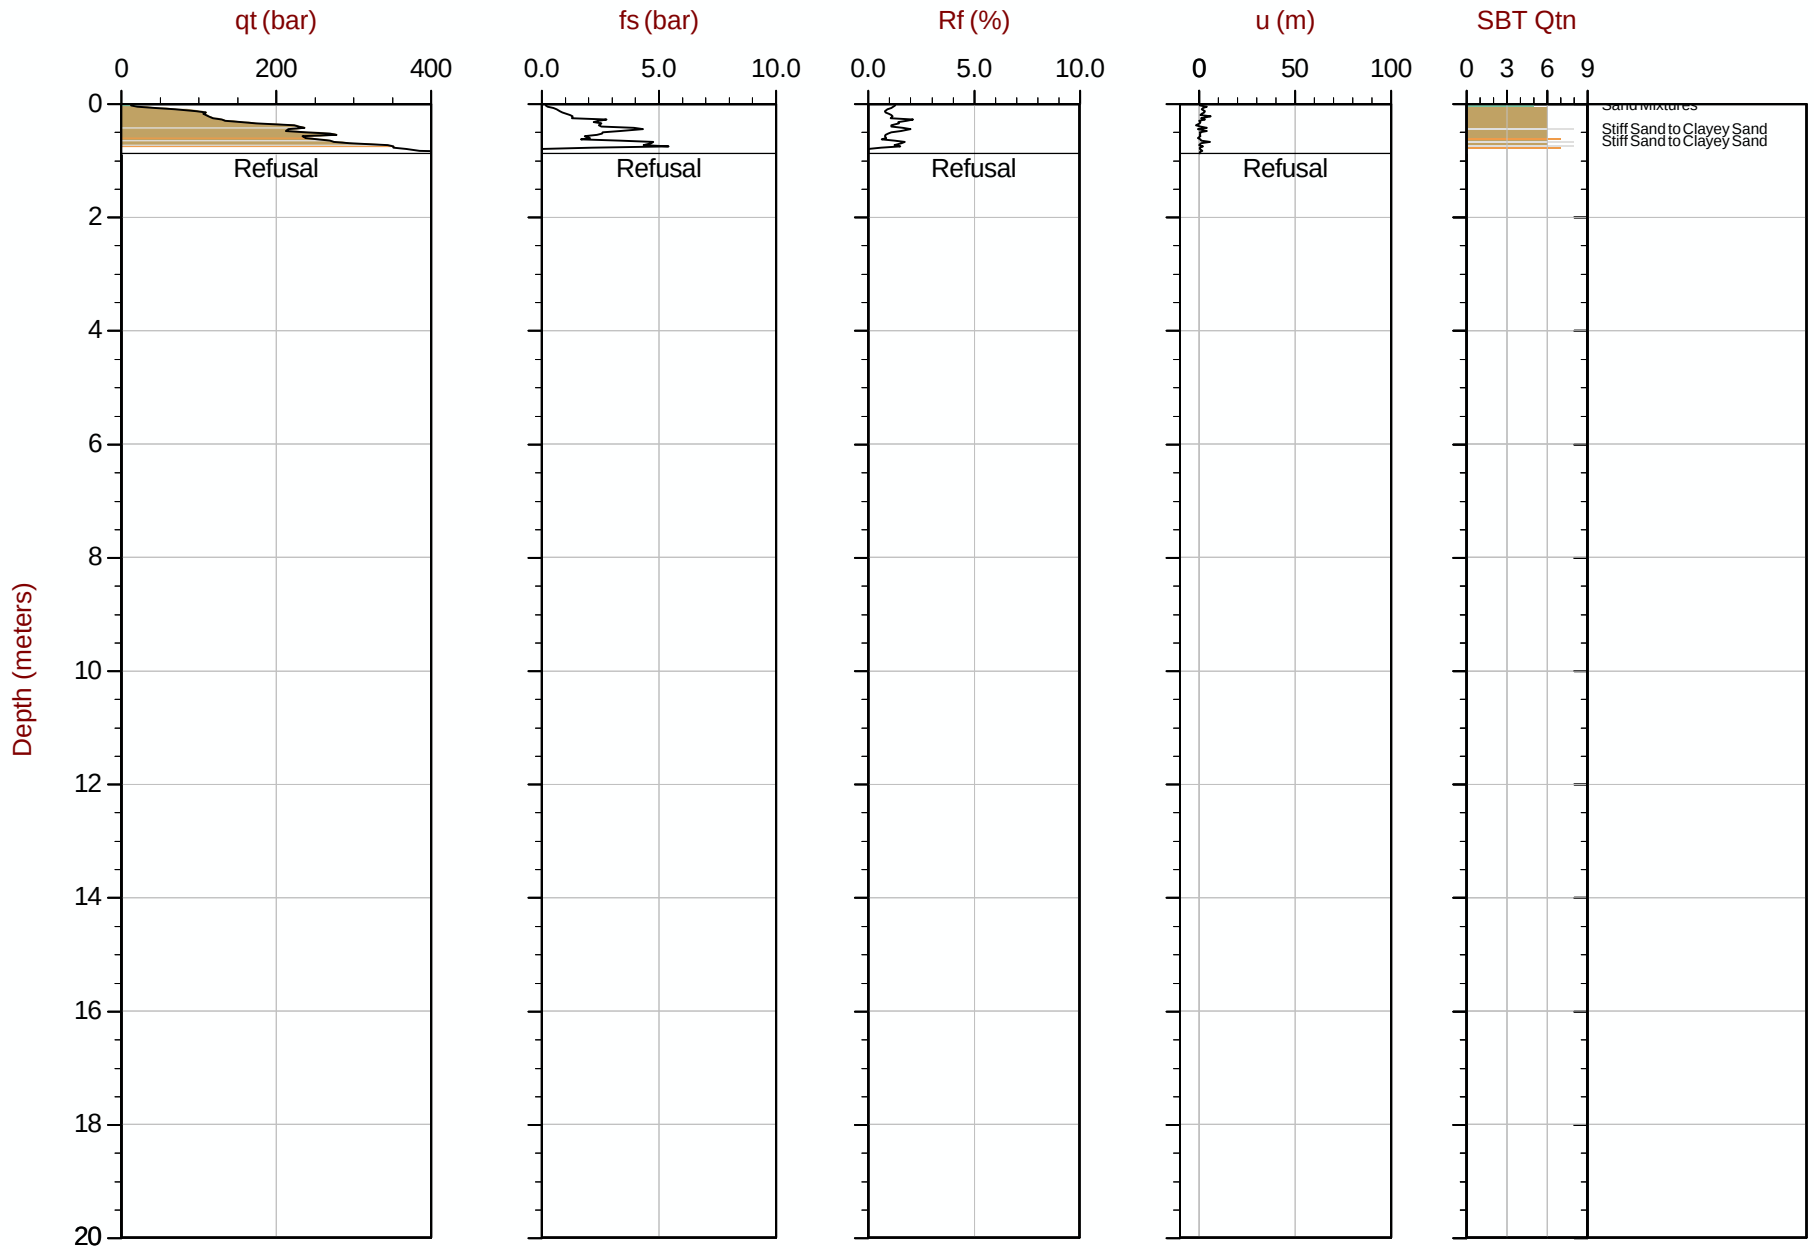

Max Depth: 0.875 m / 2.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT228.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611109m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 14:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228B
Cone: 854:T1500F15U35 Area= 15cm2

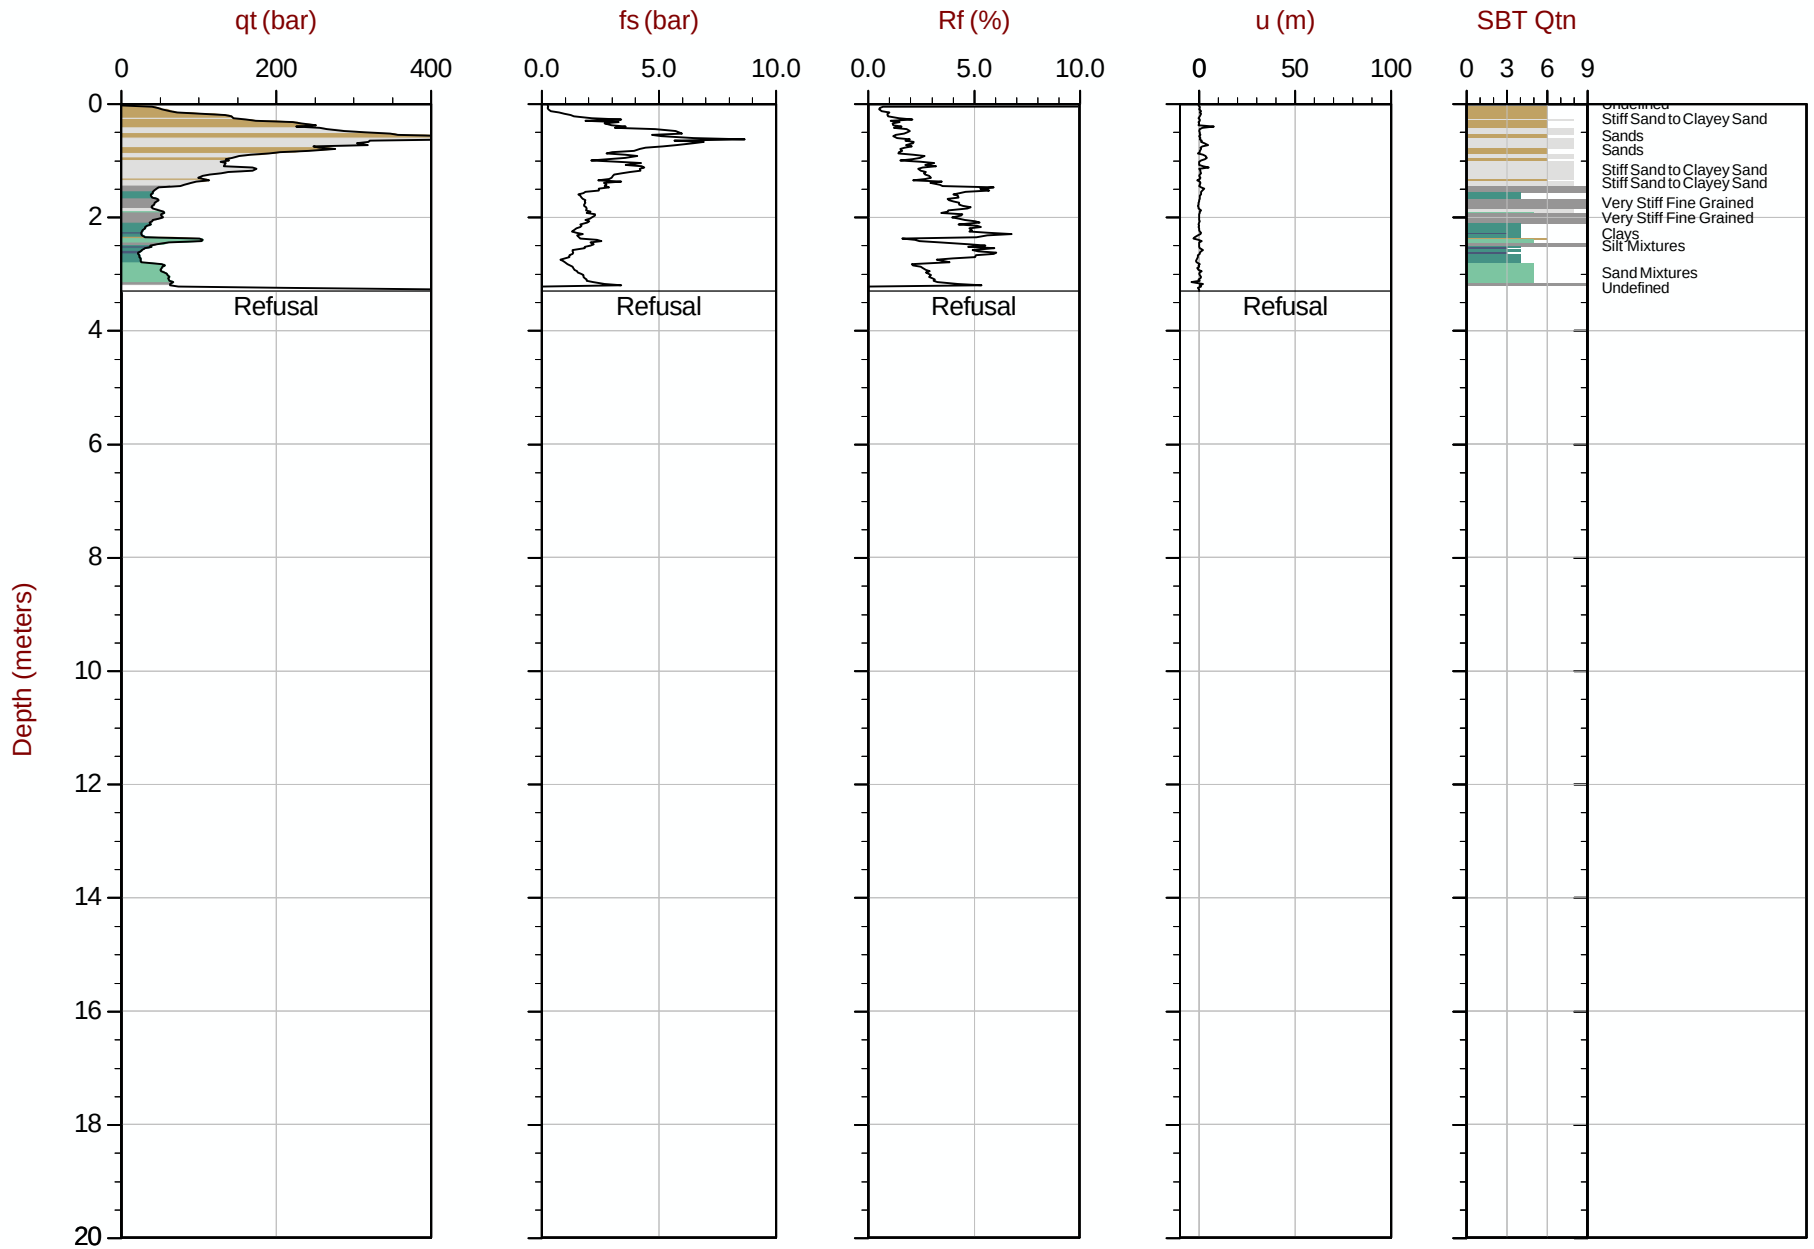

Max Depth: 3.300 m / 10.83 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT228B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611107m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 14:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228C
Cone: 854:T1500F15U35 Area= 15cm2

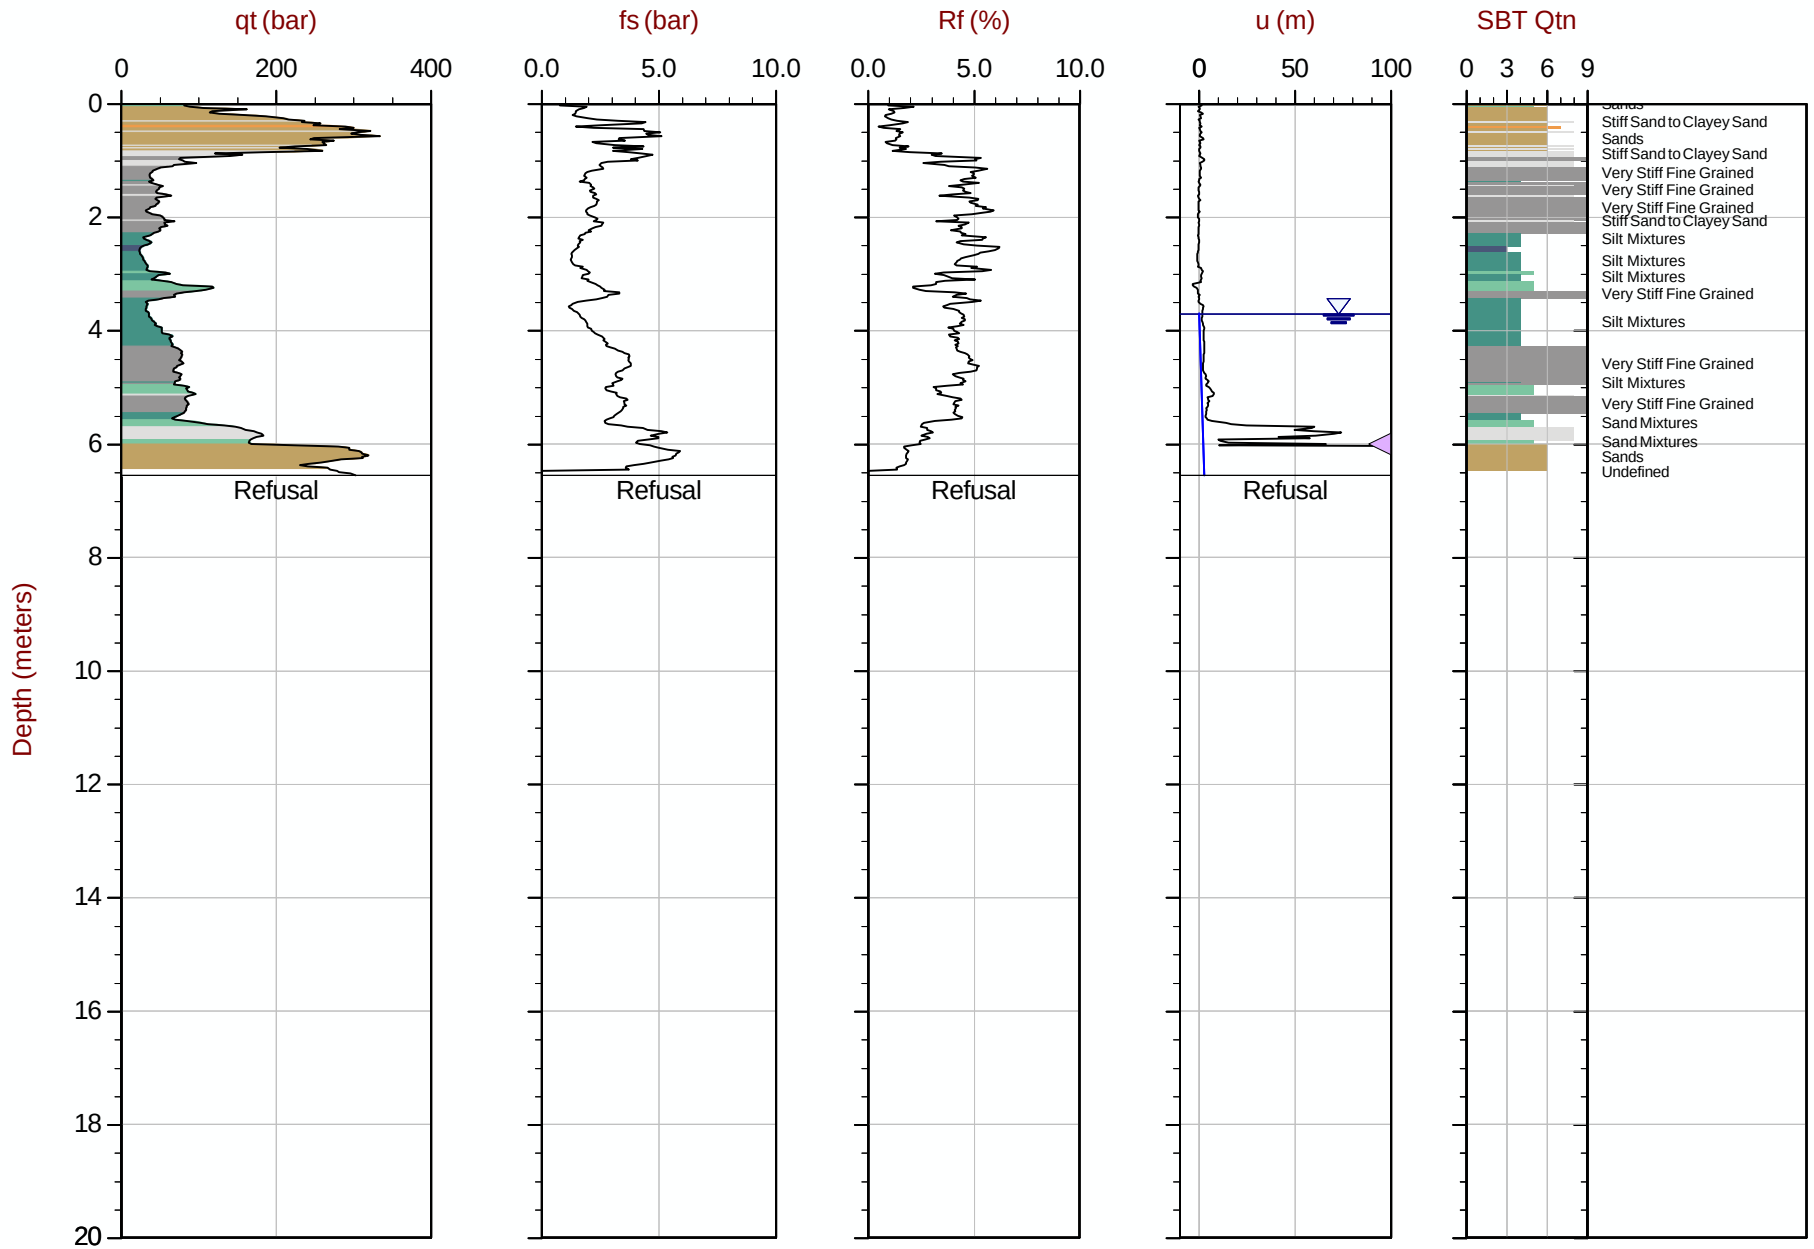

Max Depth: 6.550 m / 21.49 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT228C.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611105m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 15:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT229
Cone: 854:T1500F15U35 Area= 15cm2

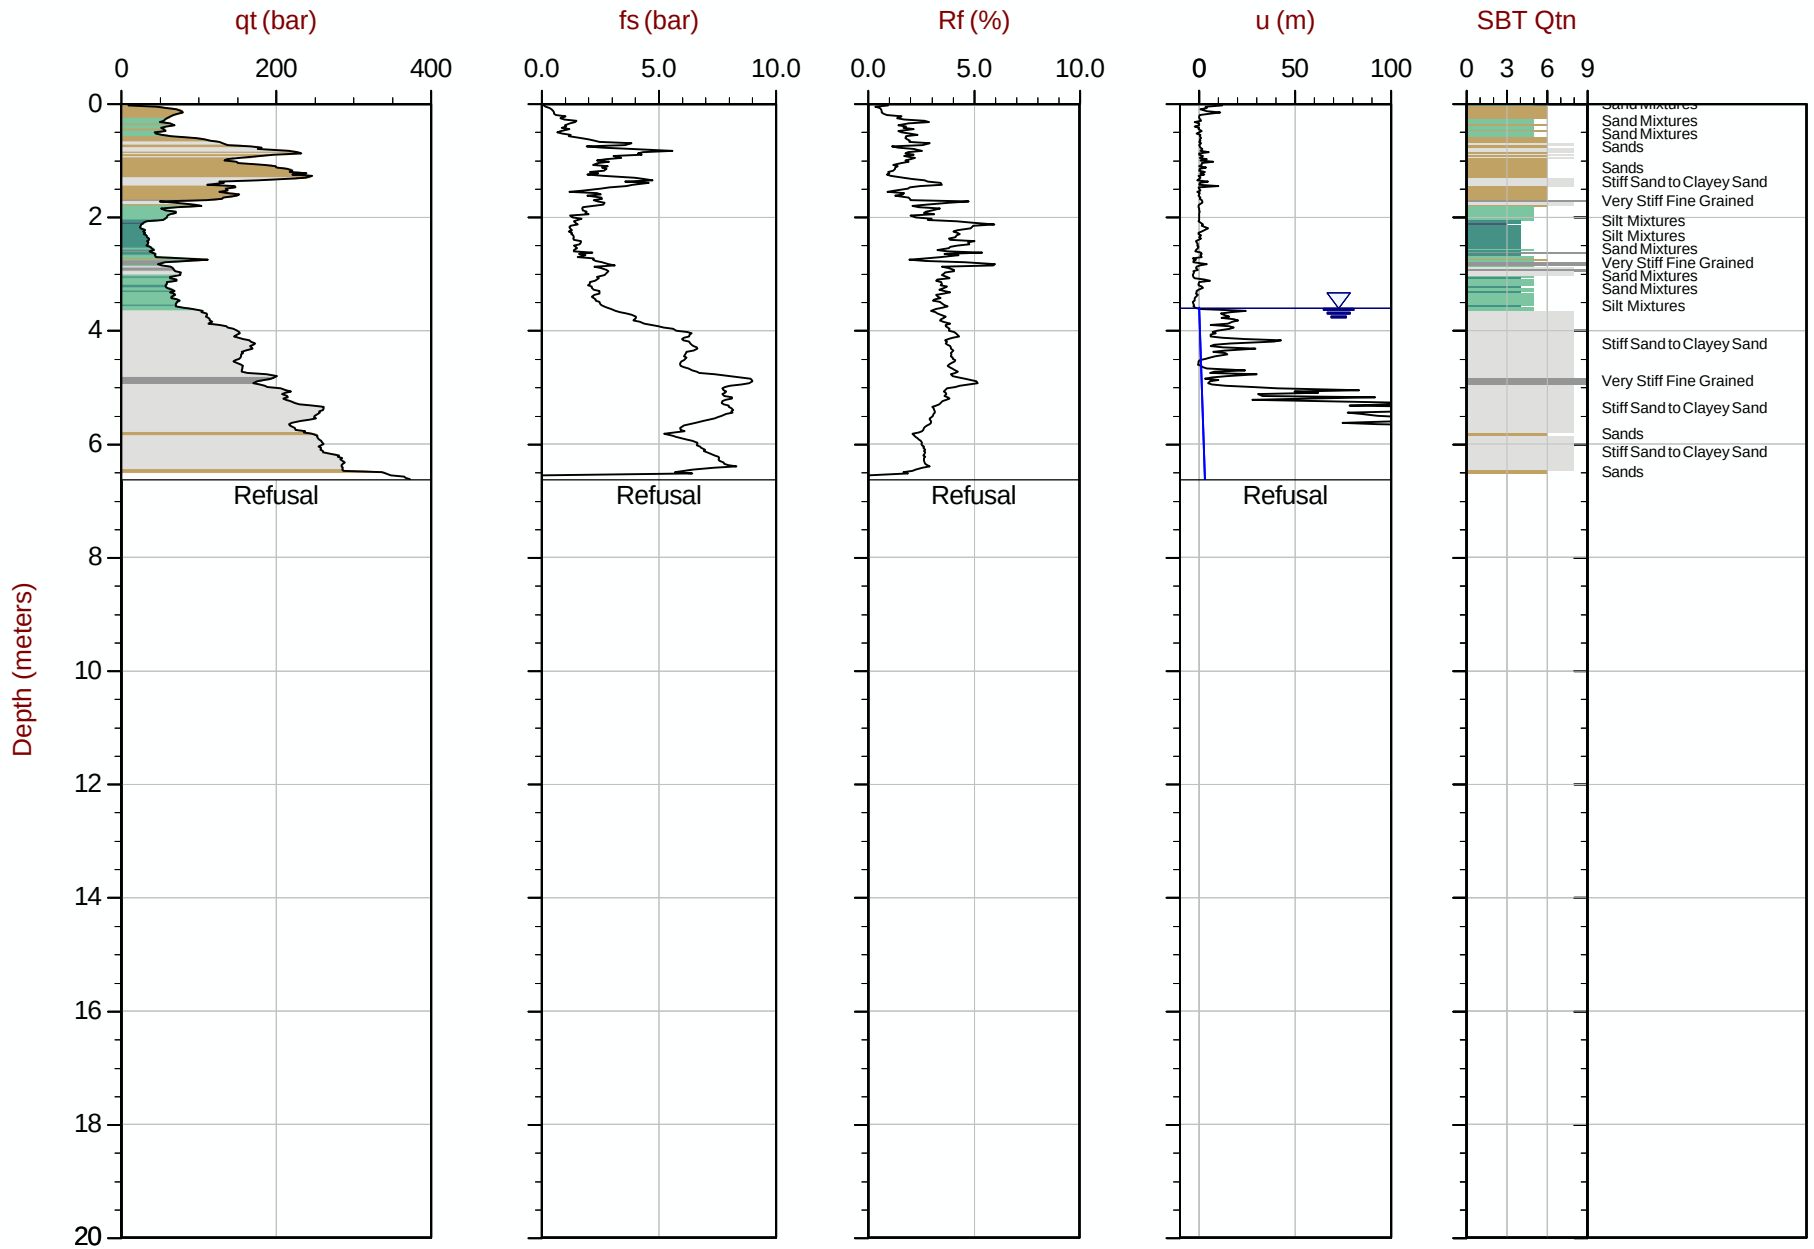

Max Depth: 6.625 m / 21.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT229.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611058m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 16:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT230
Cone: 854:T1500F15U35 Area= 15cm2

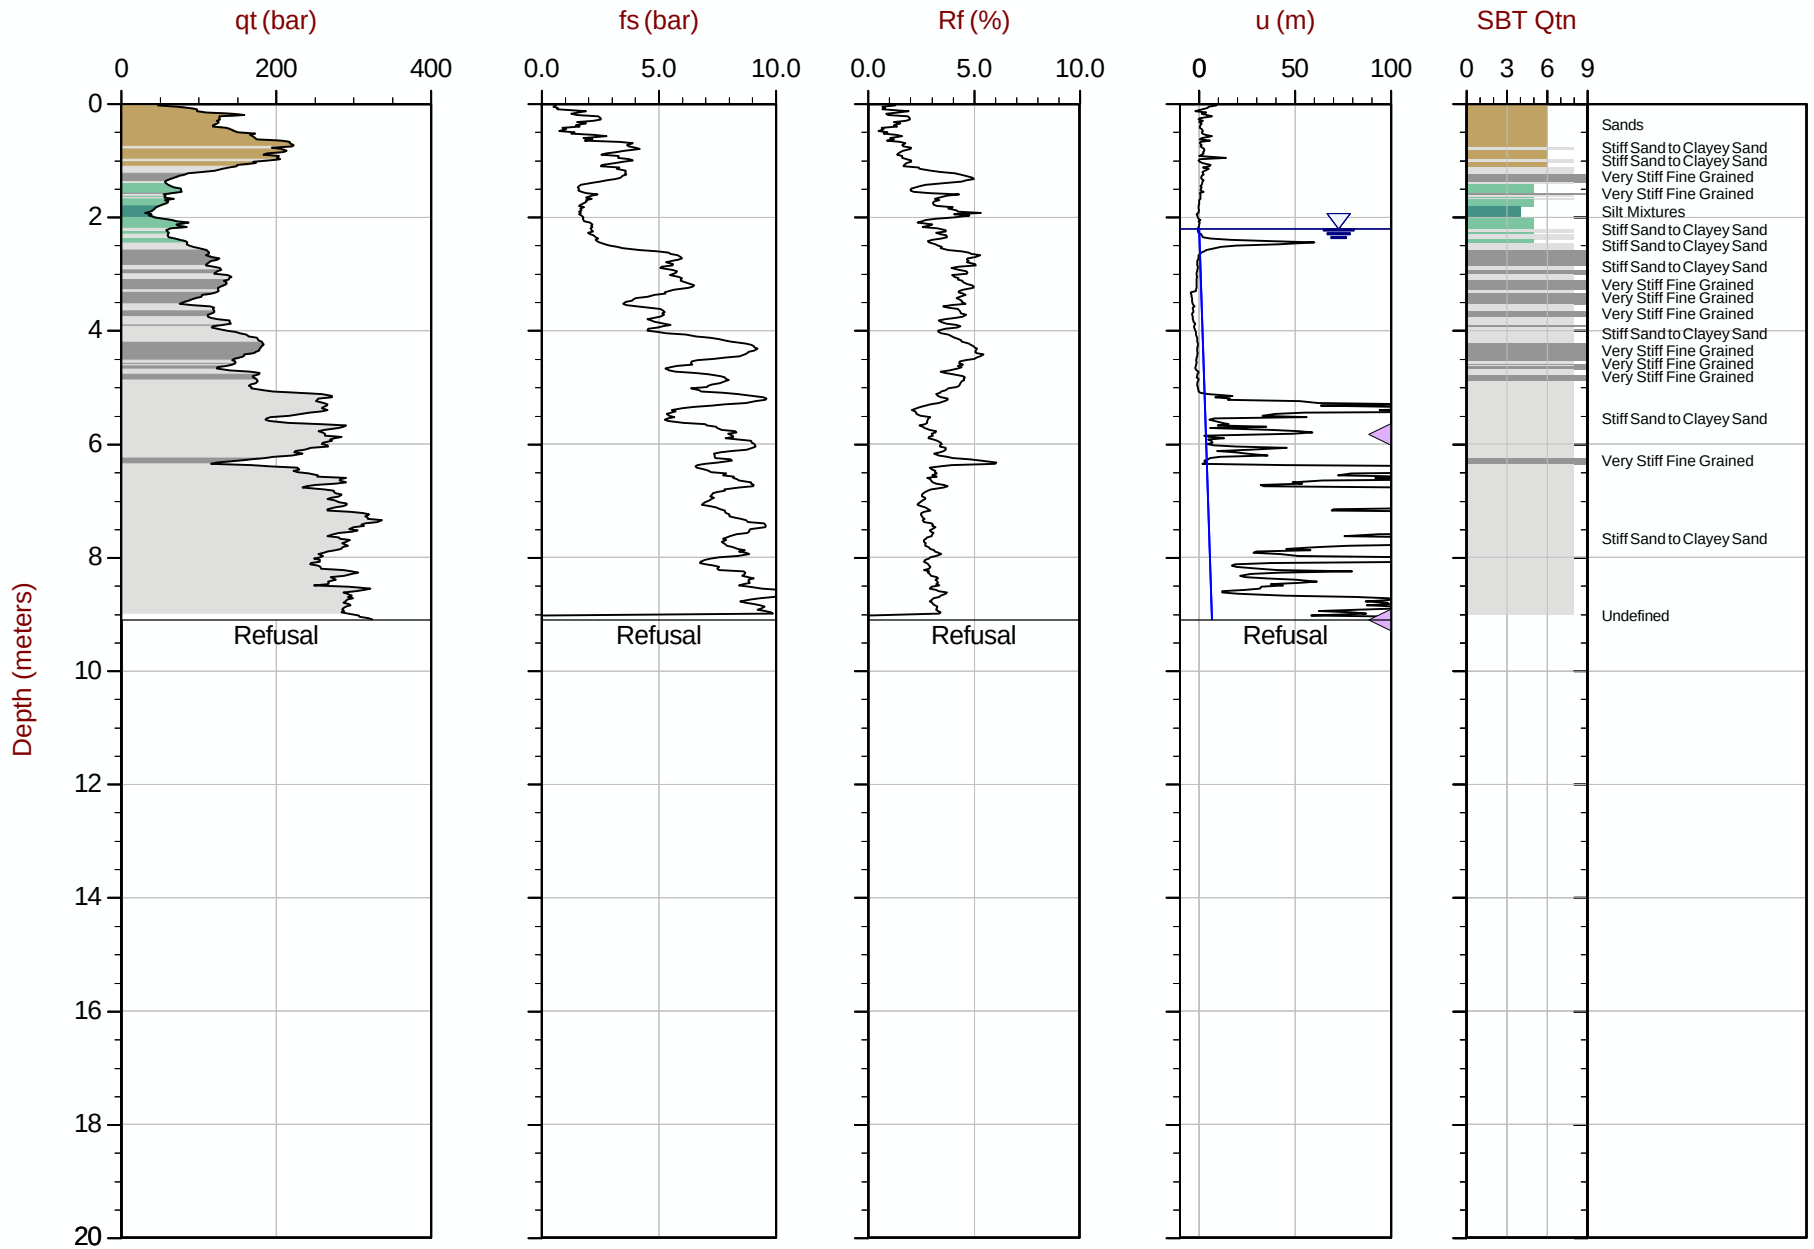

Max Depth: 9.100 m / 29.86 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT230.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611008m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 09:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT231
Cone: 854:T1500F15U35 Area= 15cm2

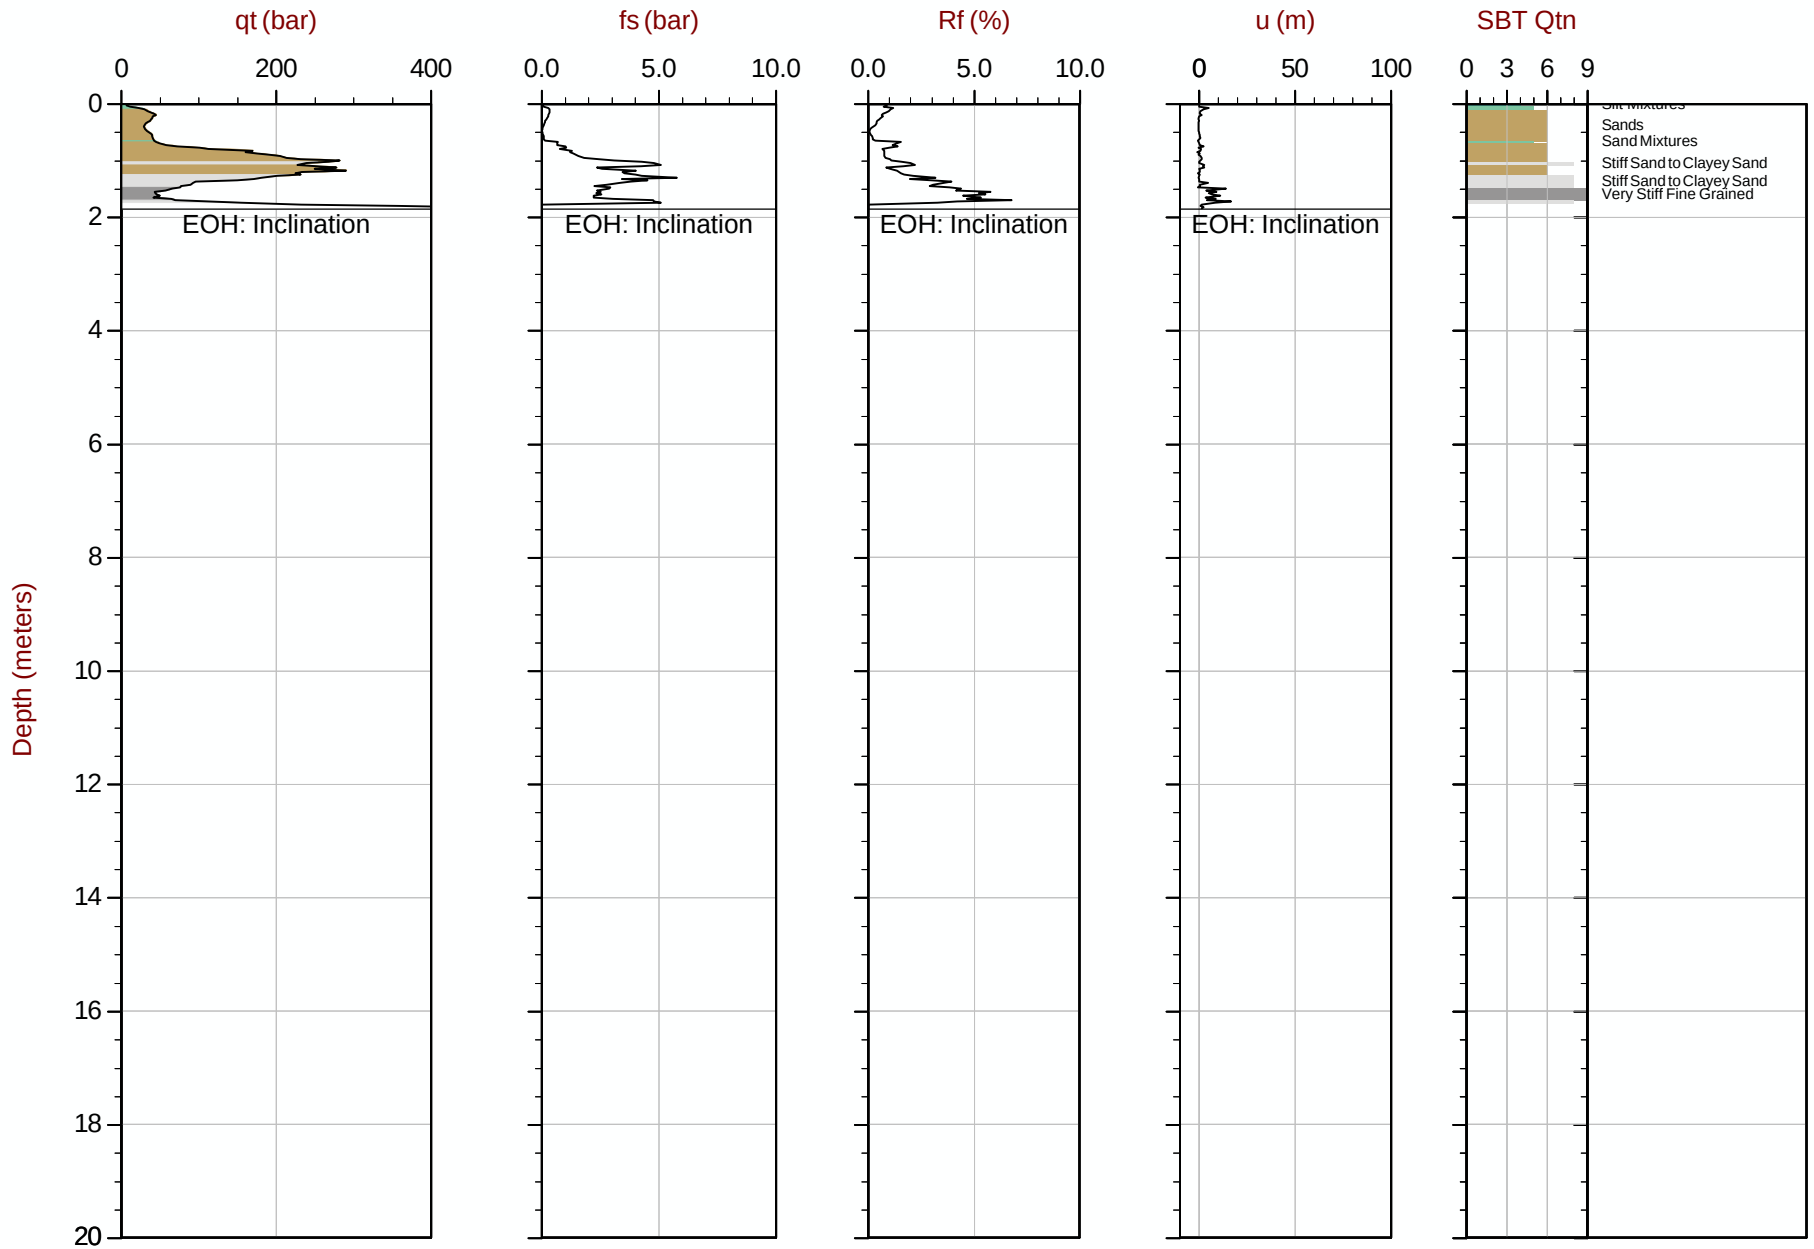

Max Depth: 1.850 m / 6.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT231.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610958m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 09:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT231A
Cone: 854:T1500F15U35 Area= 15cm2

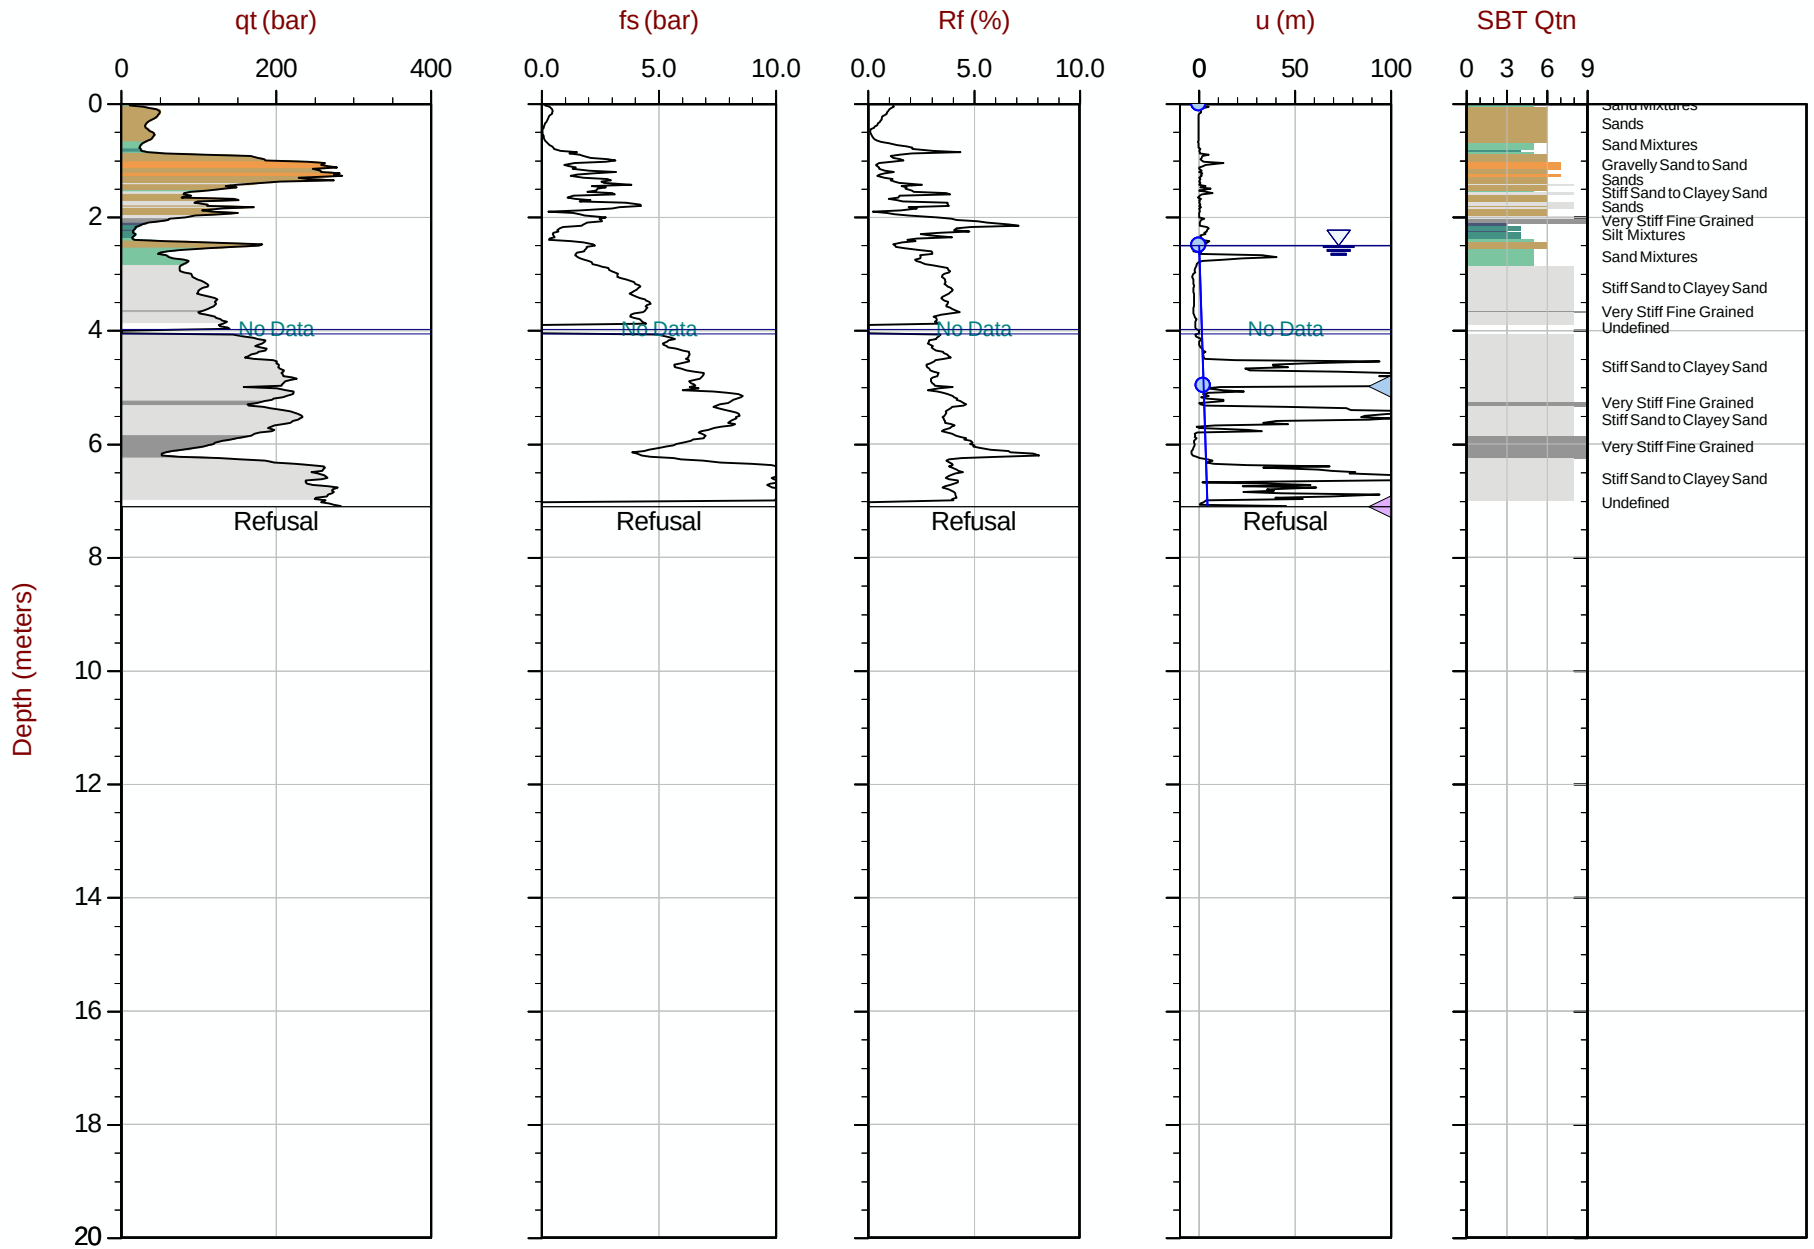

Max Depth: 7.100 m / 23.29 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT231A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610958m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 10:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT232
Cone: 854:T1500F15U35 Area= 15cm2

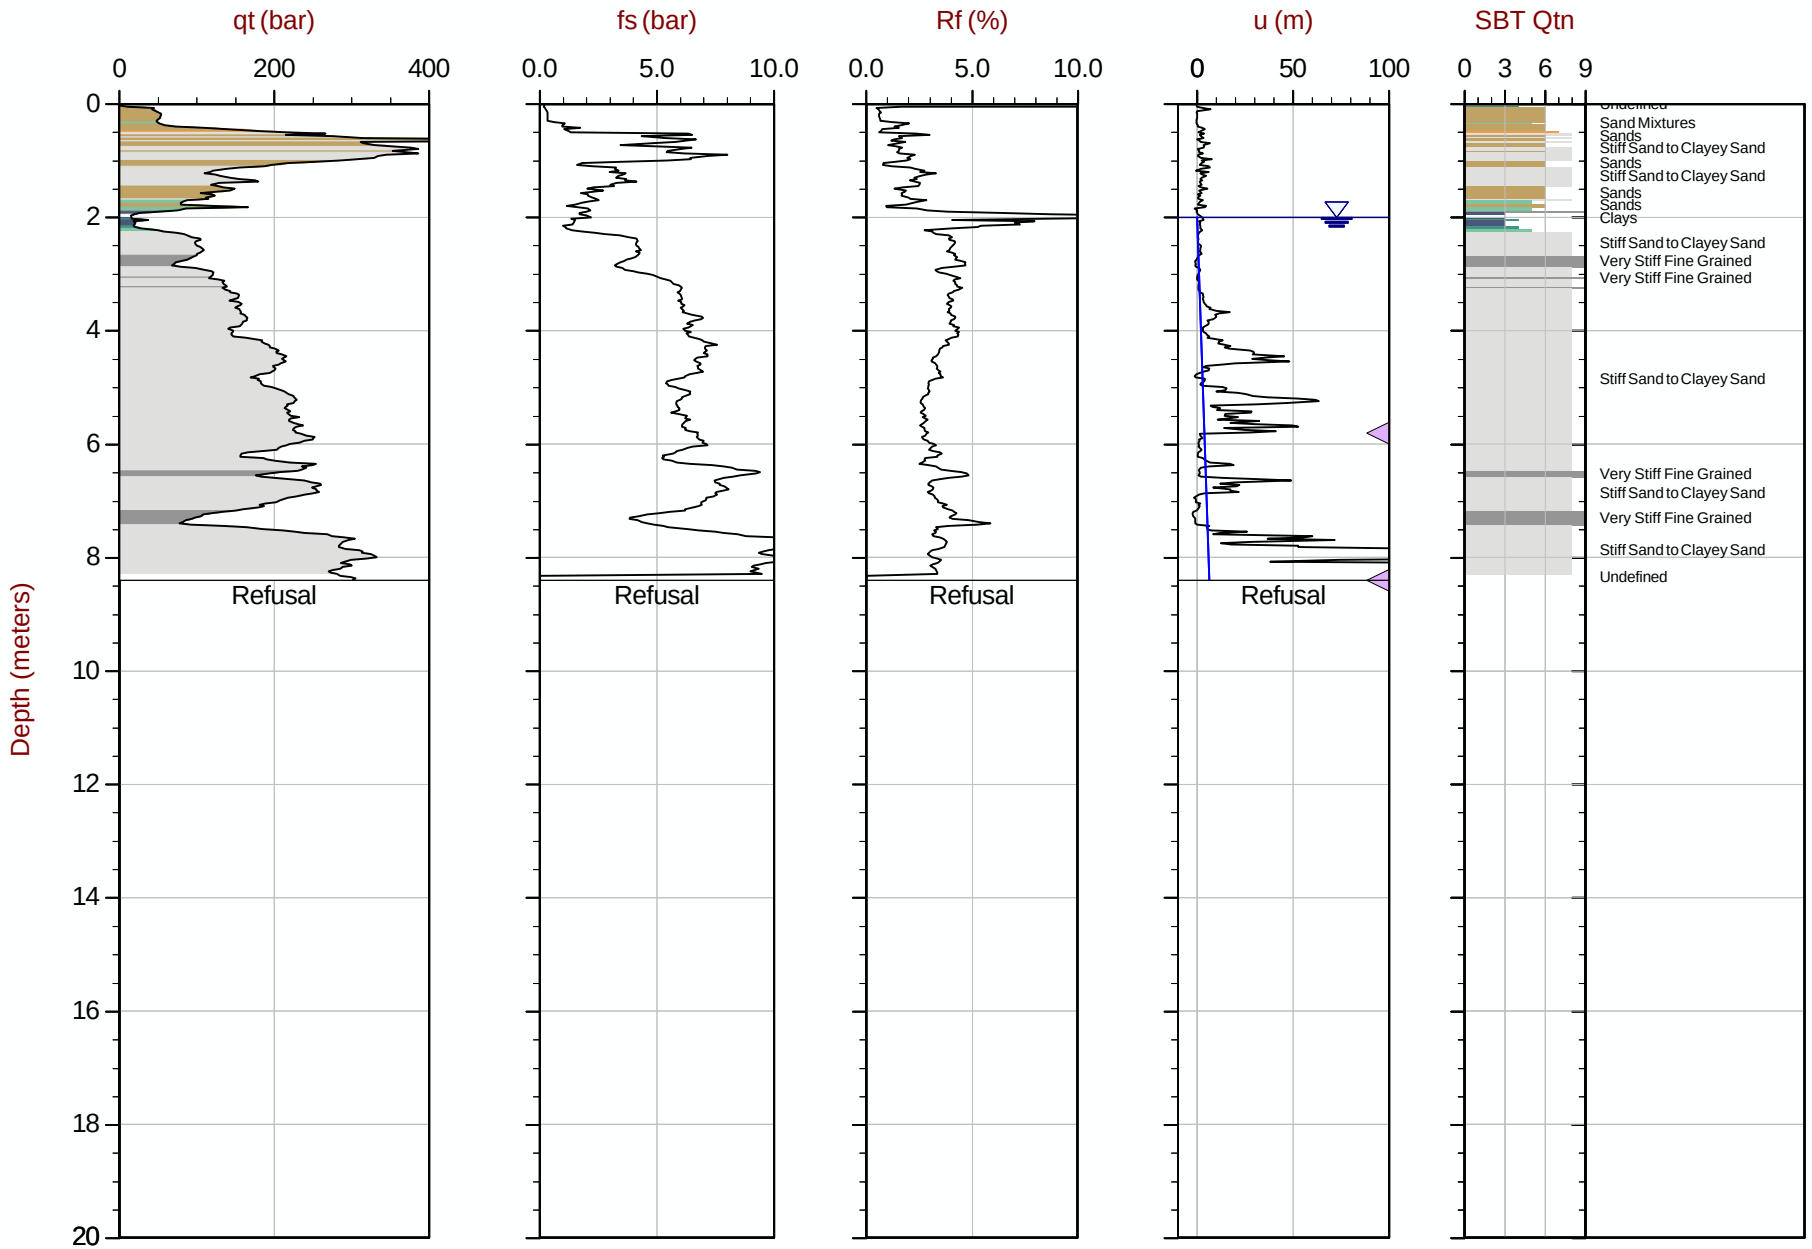

Max Depth: 8.400 m / 27.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT232.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610907m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 12:15
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT233
Cone: 854:T1500F15U35 Area= 15cm2

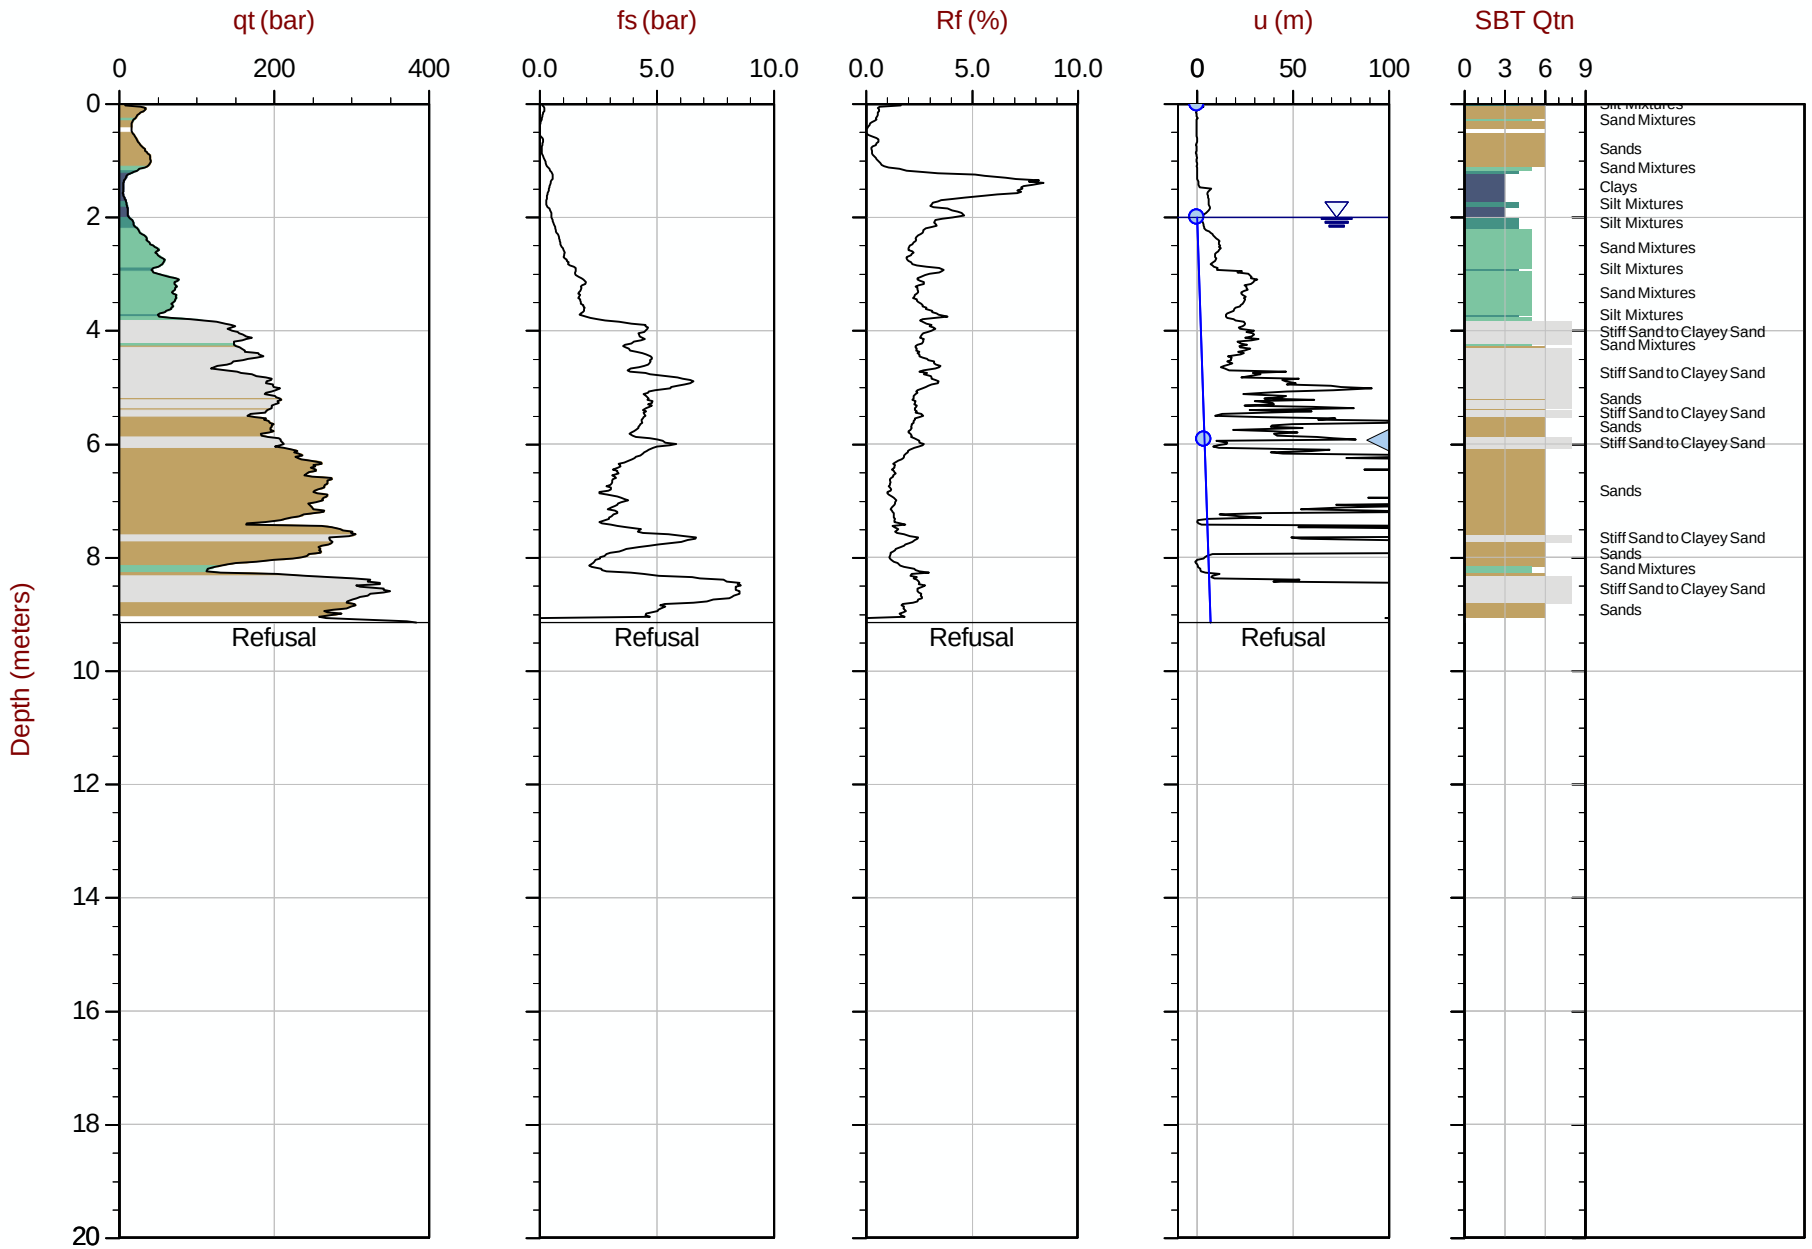

Max Depth: 9.150 m / 30.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT233.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610858m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 13:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT234
Cone: 854:T1500F15U35 Area= 15cm2

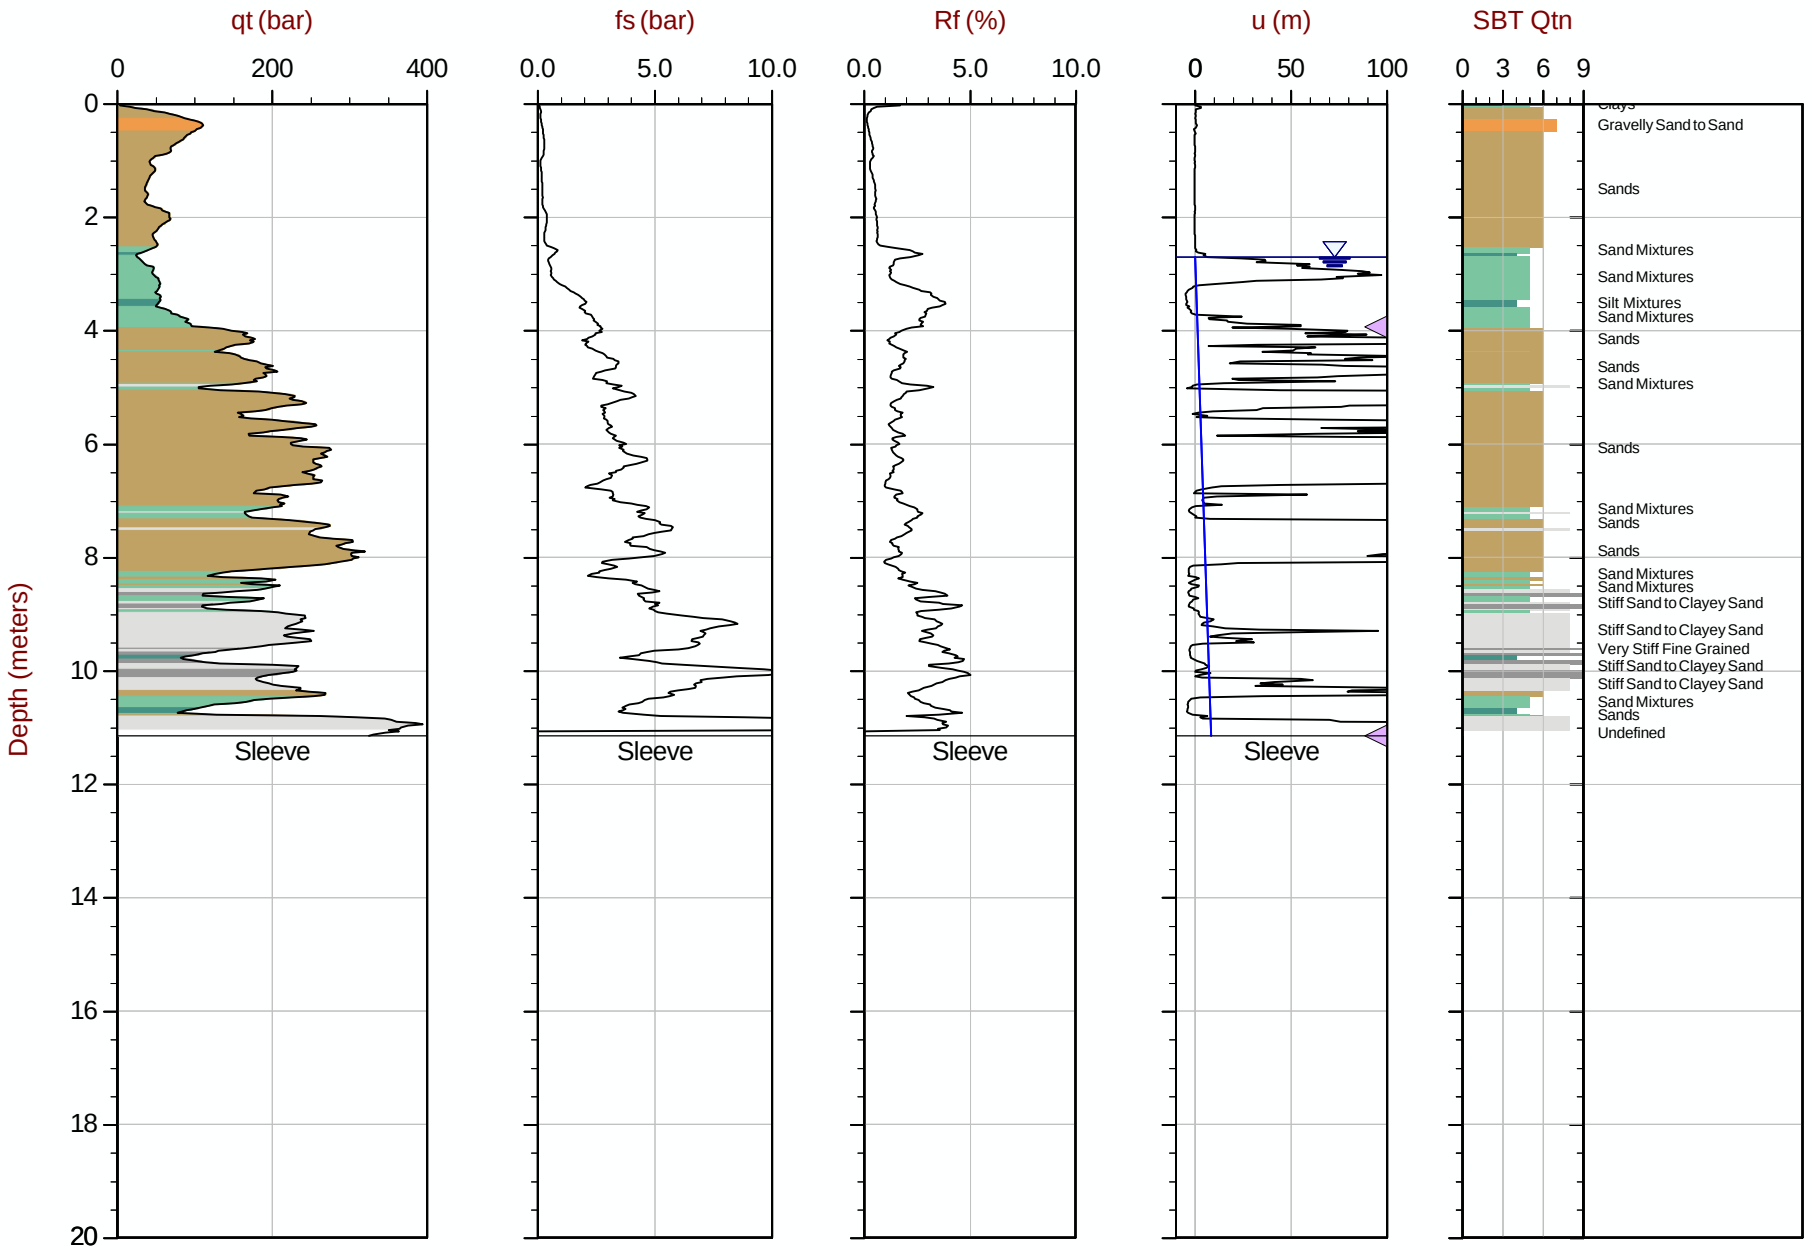

Max Depth: 11.150 m / 36.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT234.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610802m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 14:42
Site: Brooks, Alberta

Sounding: RCPT22-22CPT235
Cone: 854:T1500F15U35 Area= 15cm2

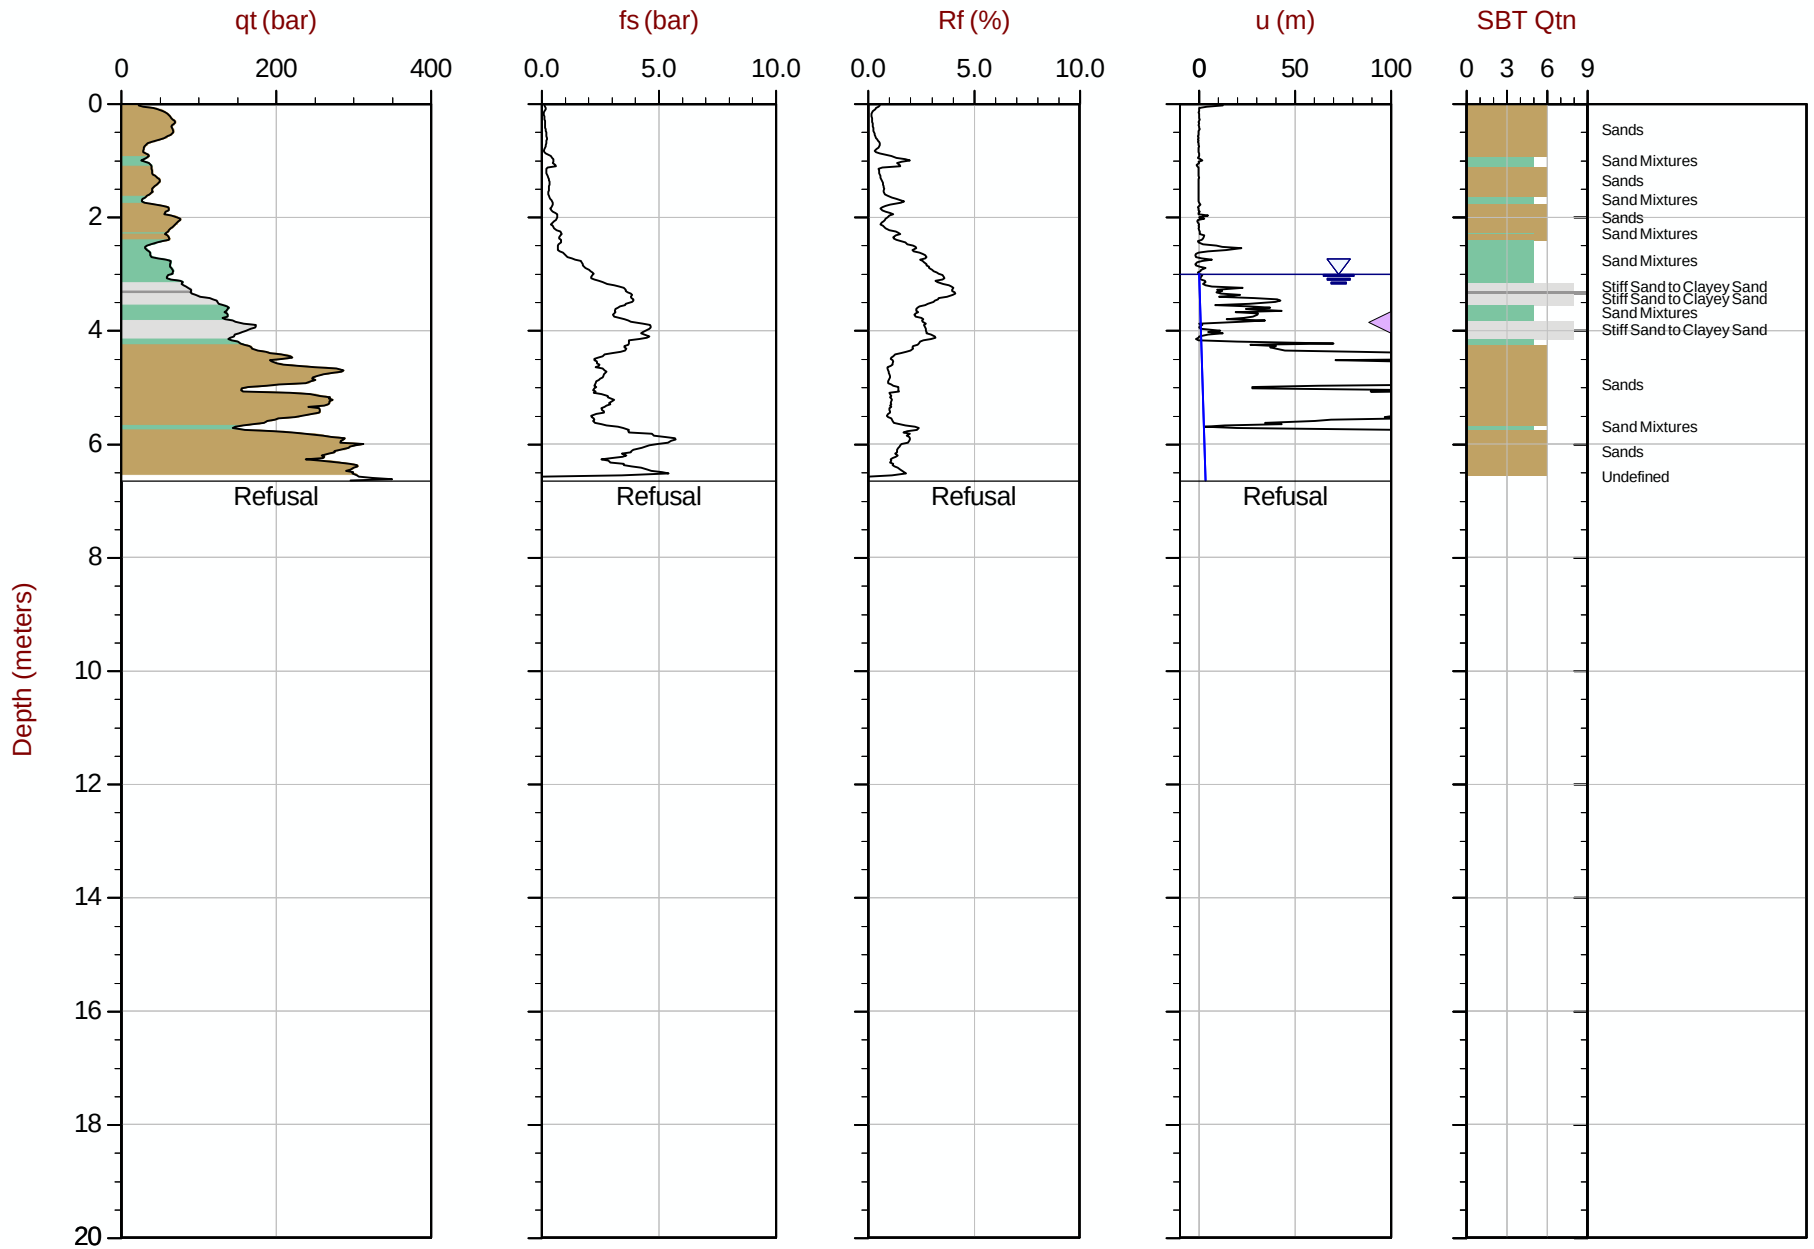

Max Depth: 6.650 m / 21.82 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT235.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610758m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 15:41
Site: Brooks, Alberta

Sounding: RCPT22-22CPT236
Cone: 854:T1500F15U35 Area= 15cm2

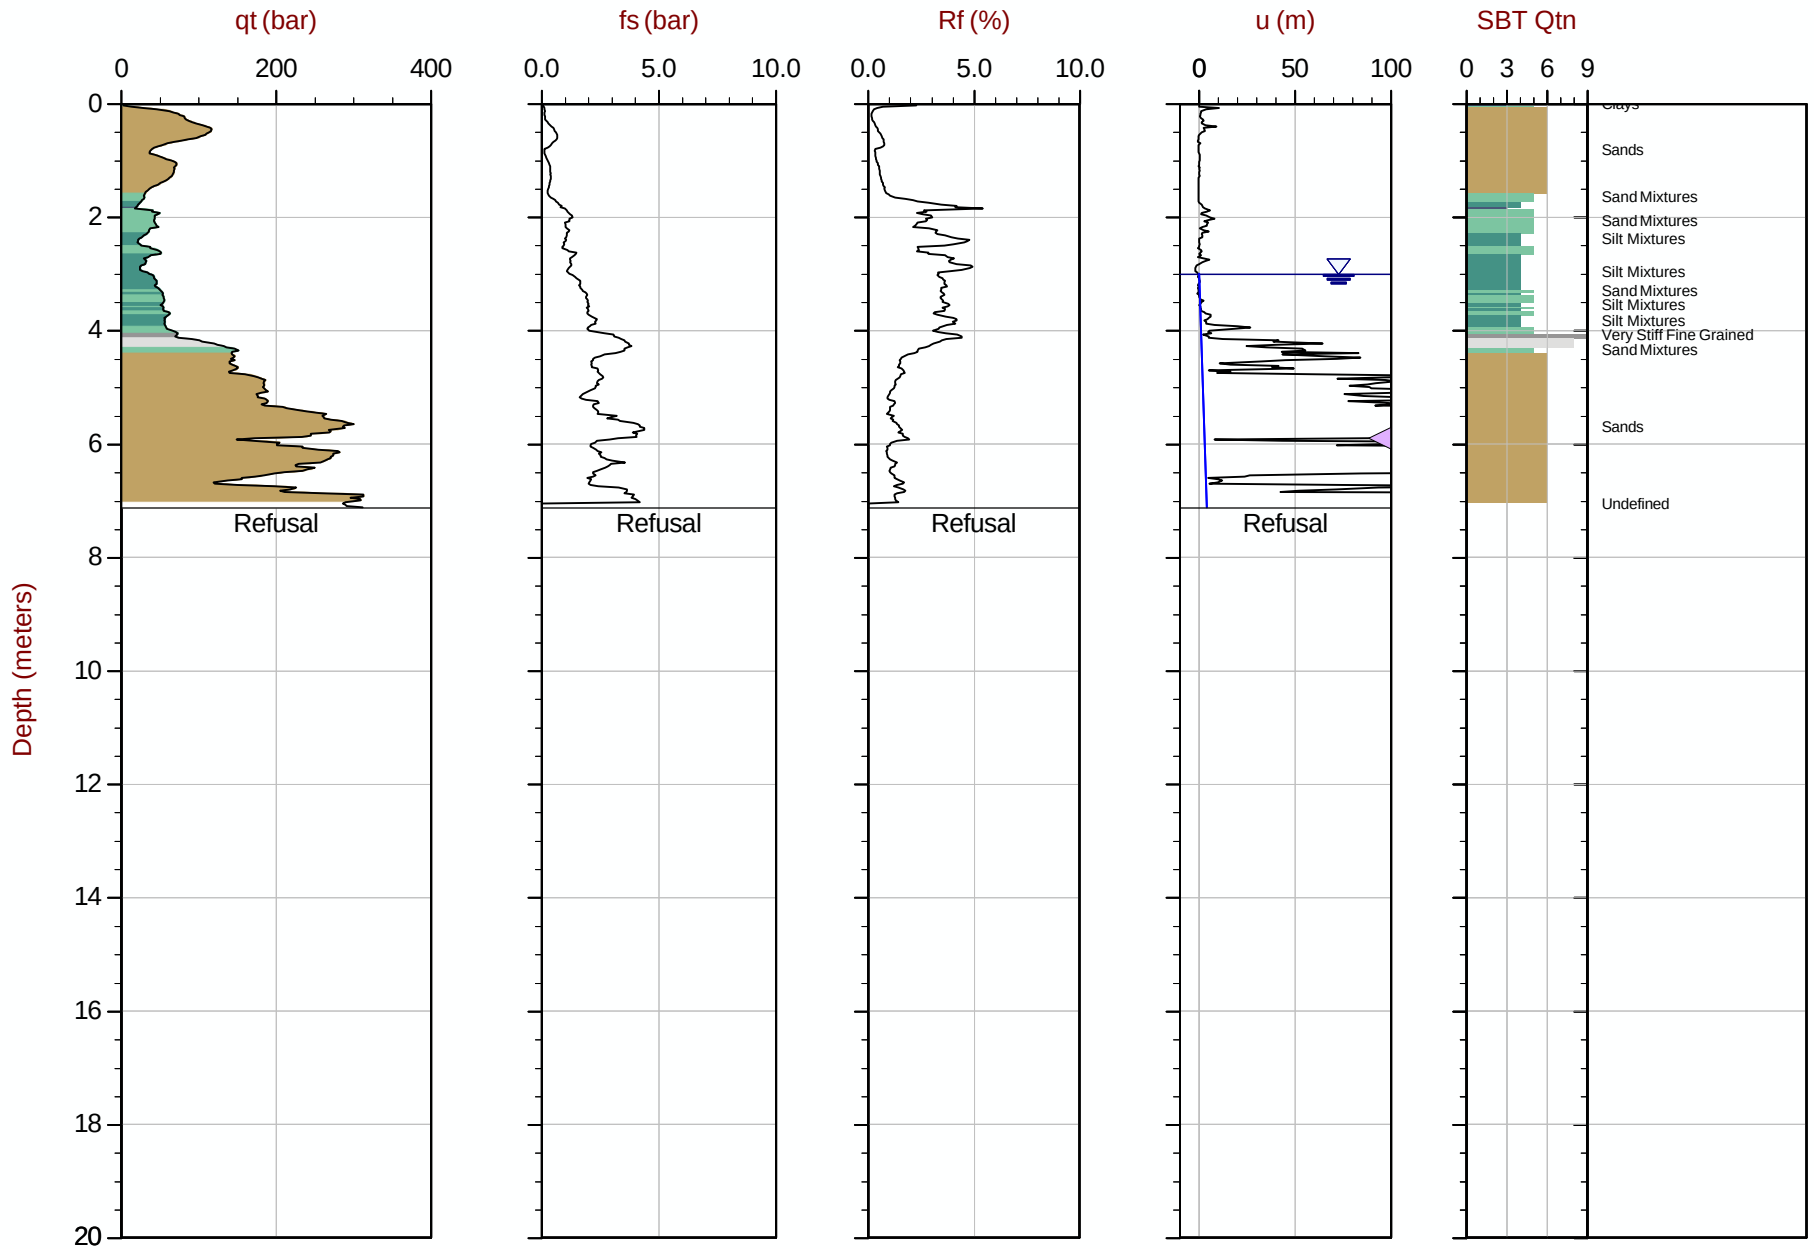

Max Depth: 7.125 m / 23.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT236.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610705m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 16:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT237
Cone: 854:T1500F15U35 Area= 15cm2

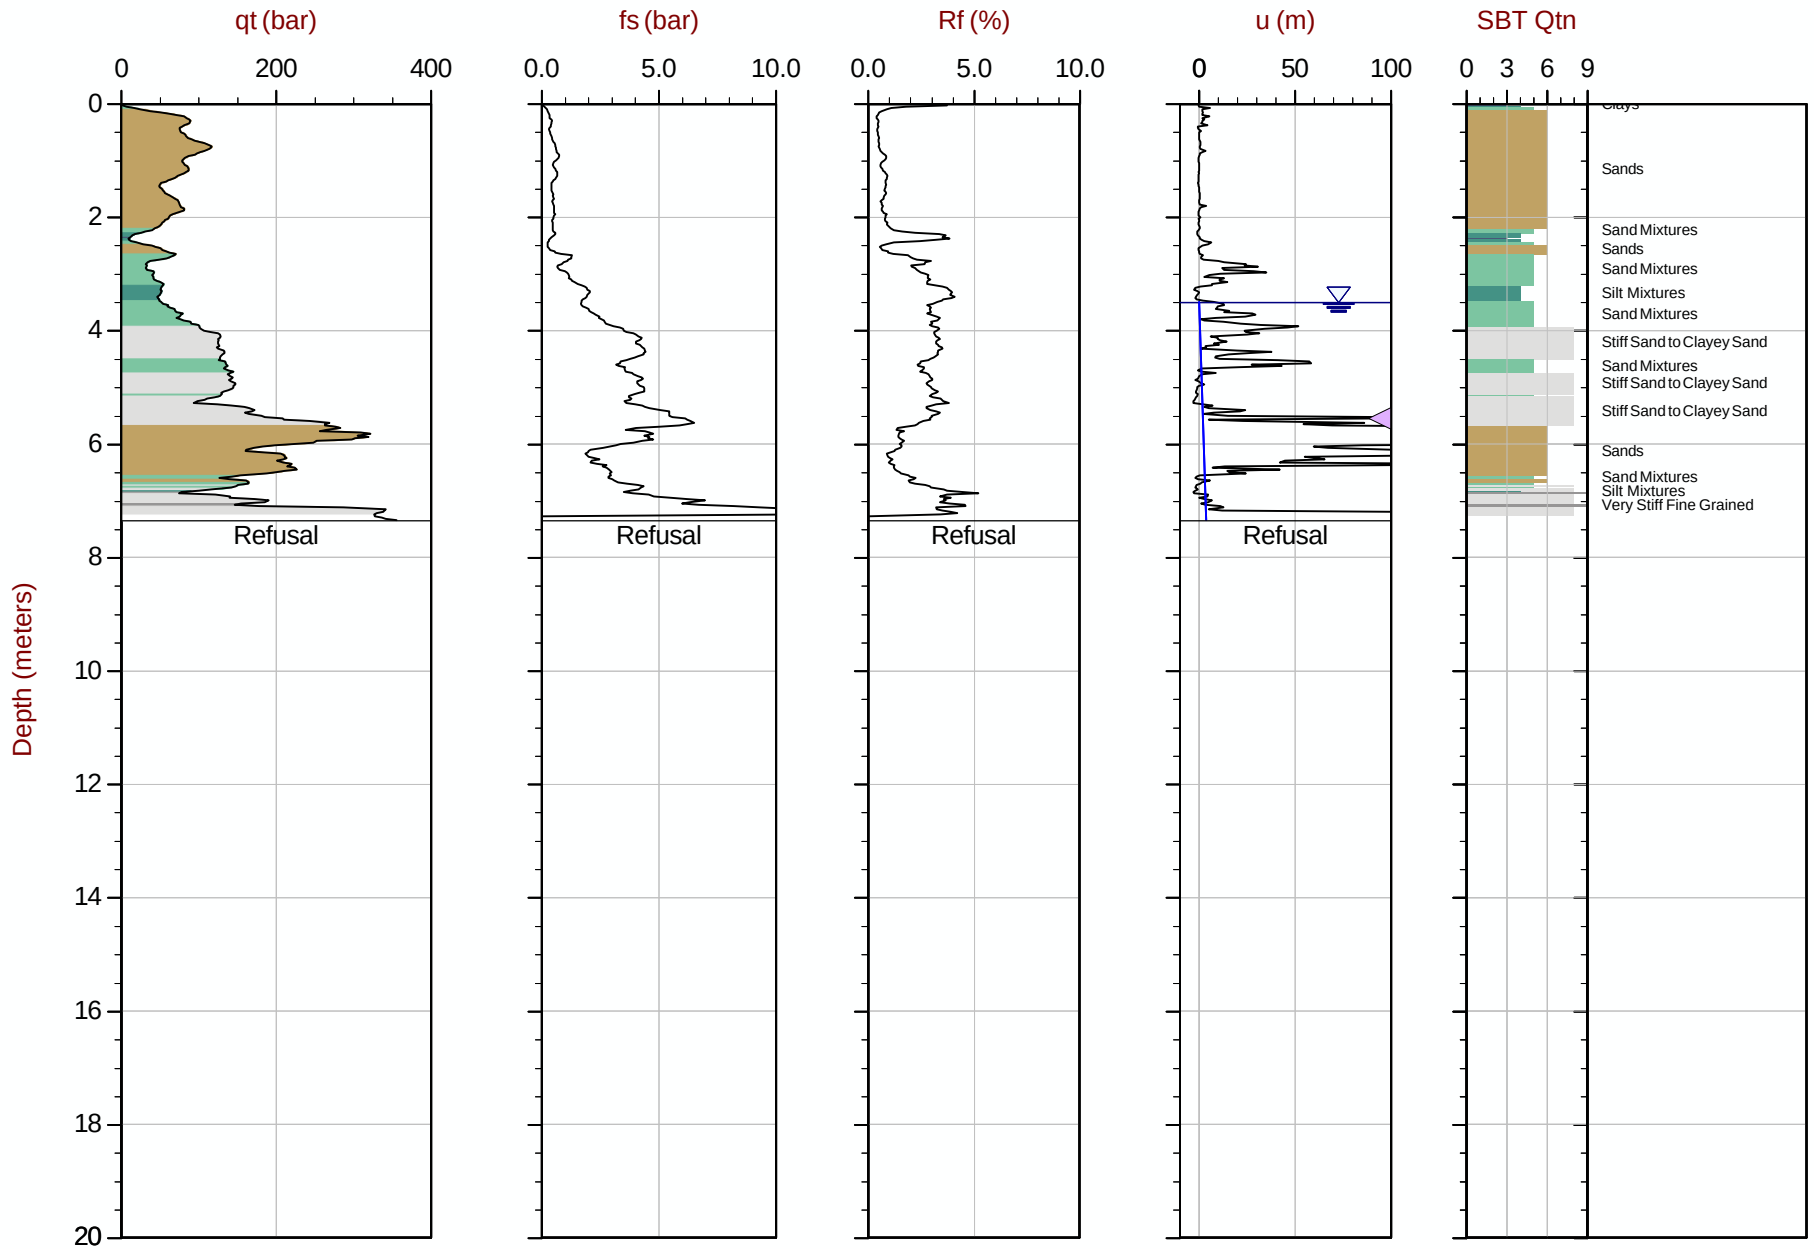

Max Depth: 7.350 m / 24.11 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT237.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610658m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 07:15
Site: Brooks, Alberta

Sounding: RCPT22-22CPT238
Cone: 854:T1500F15U35 Area= 15cm2

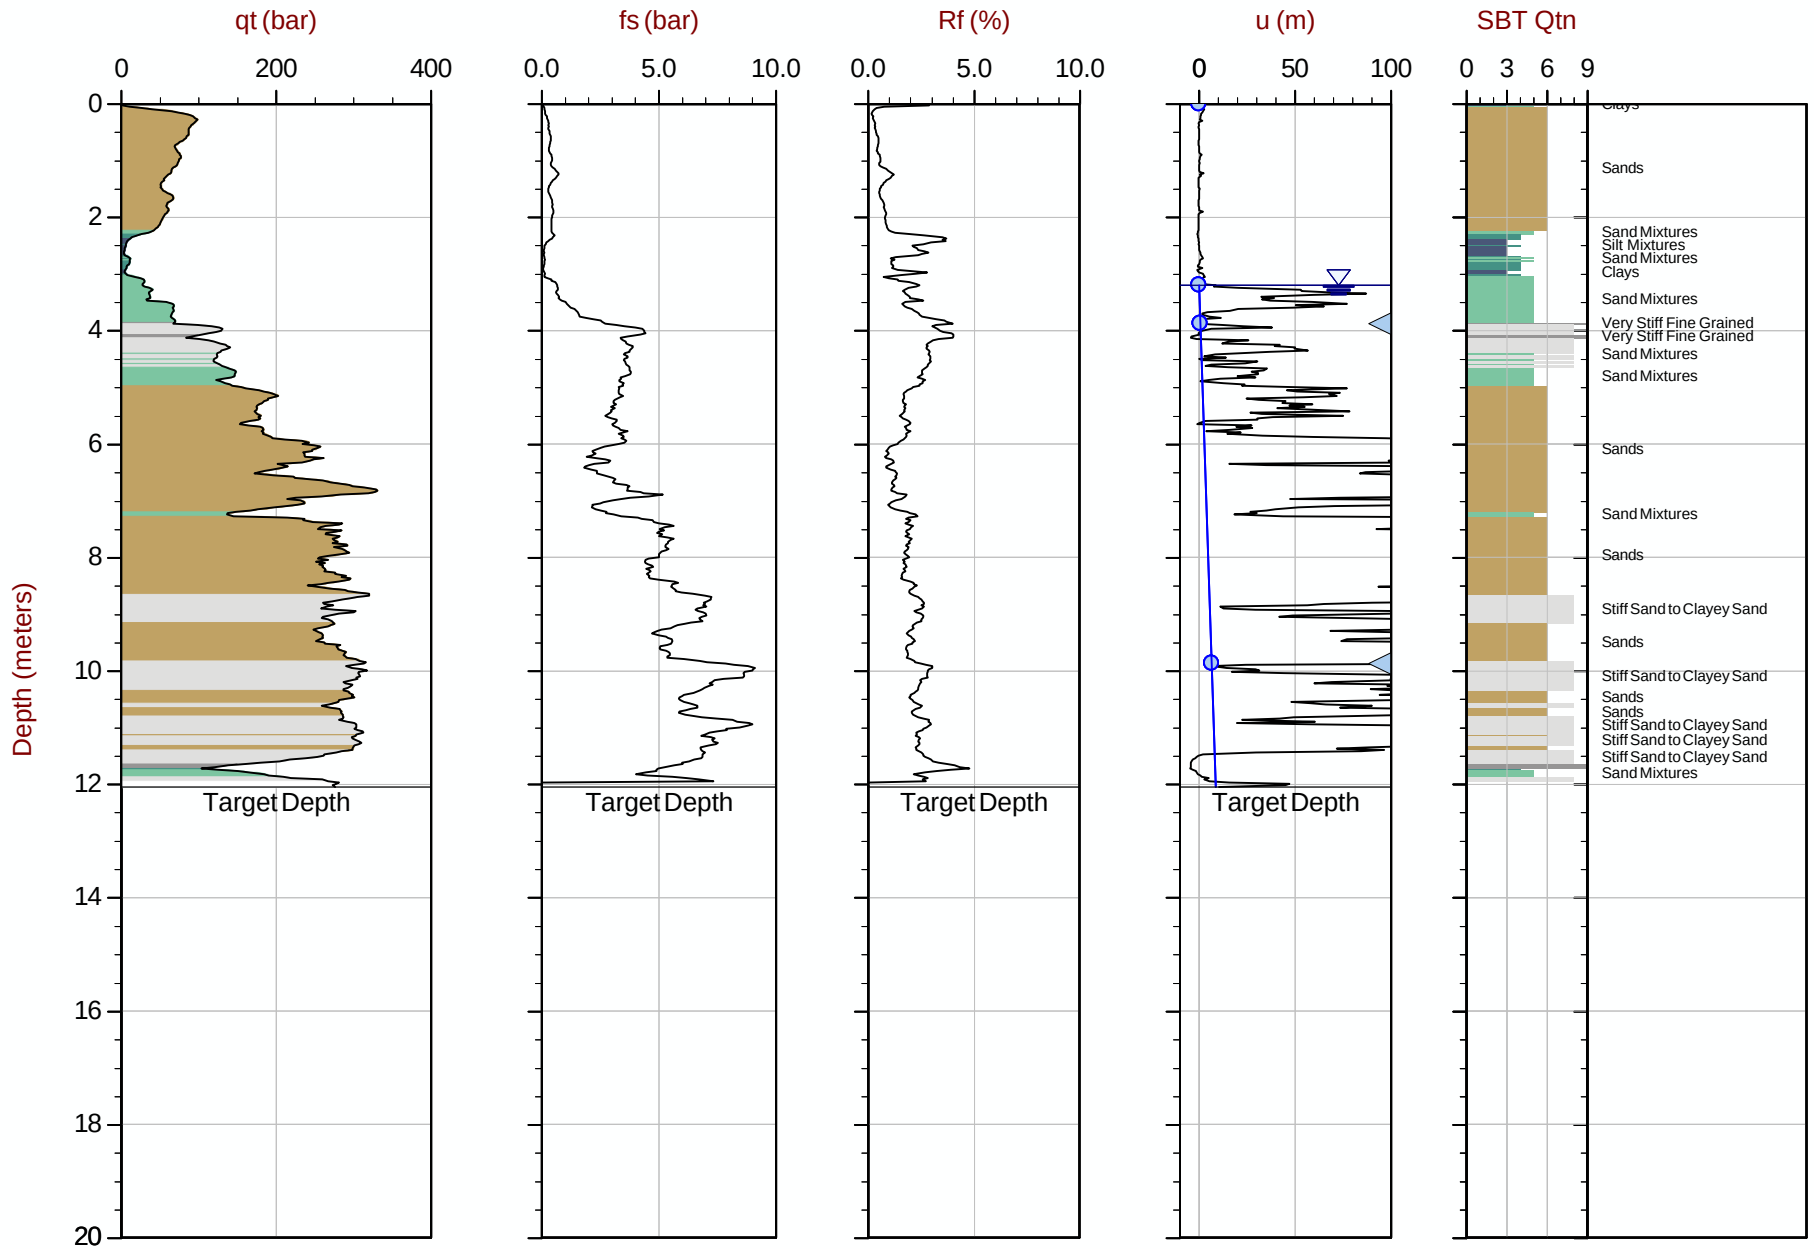

Max Depth: 12.050 m / 39.53 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT238.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610603m E: 416857m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 08:41
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT239
Cone: 854:T1500F15U35 Area= 15cm2

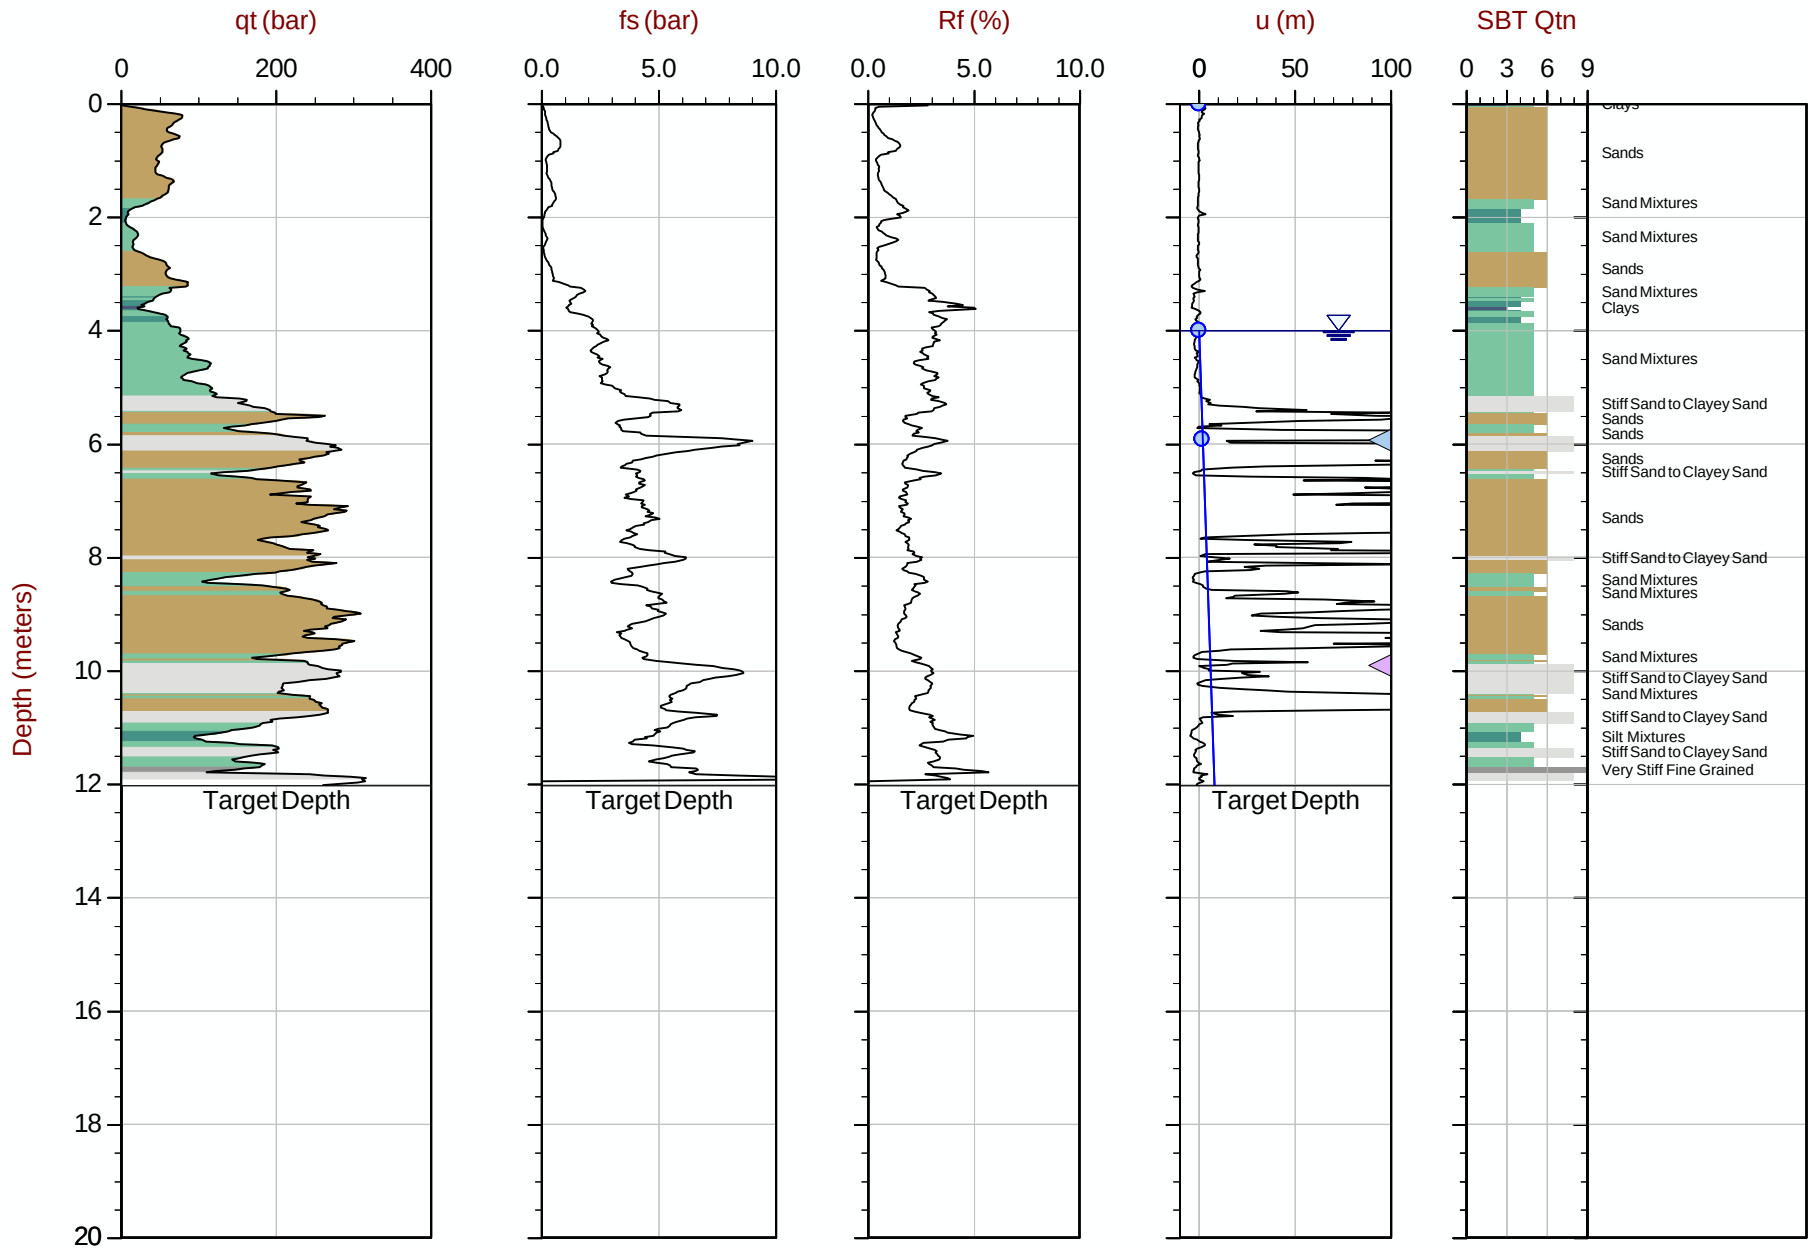

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT239.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610550m E: 416856m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 09:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT240
Cone: 854:T1500F15U35 Area= 15cm2

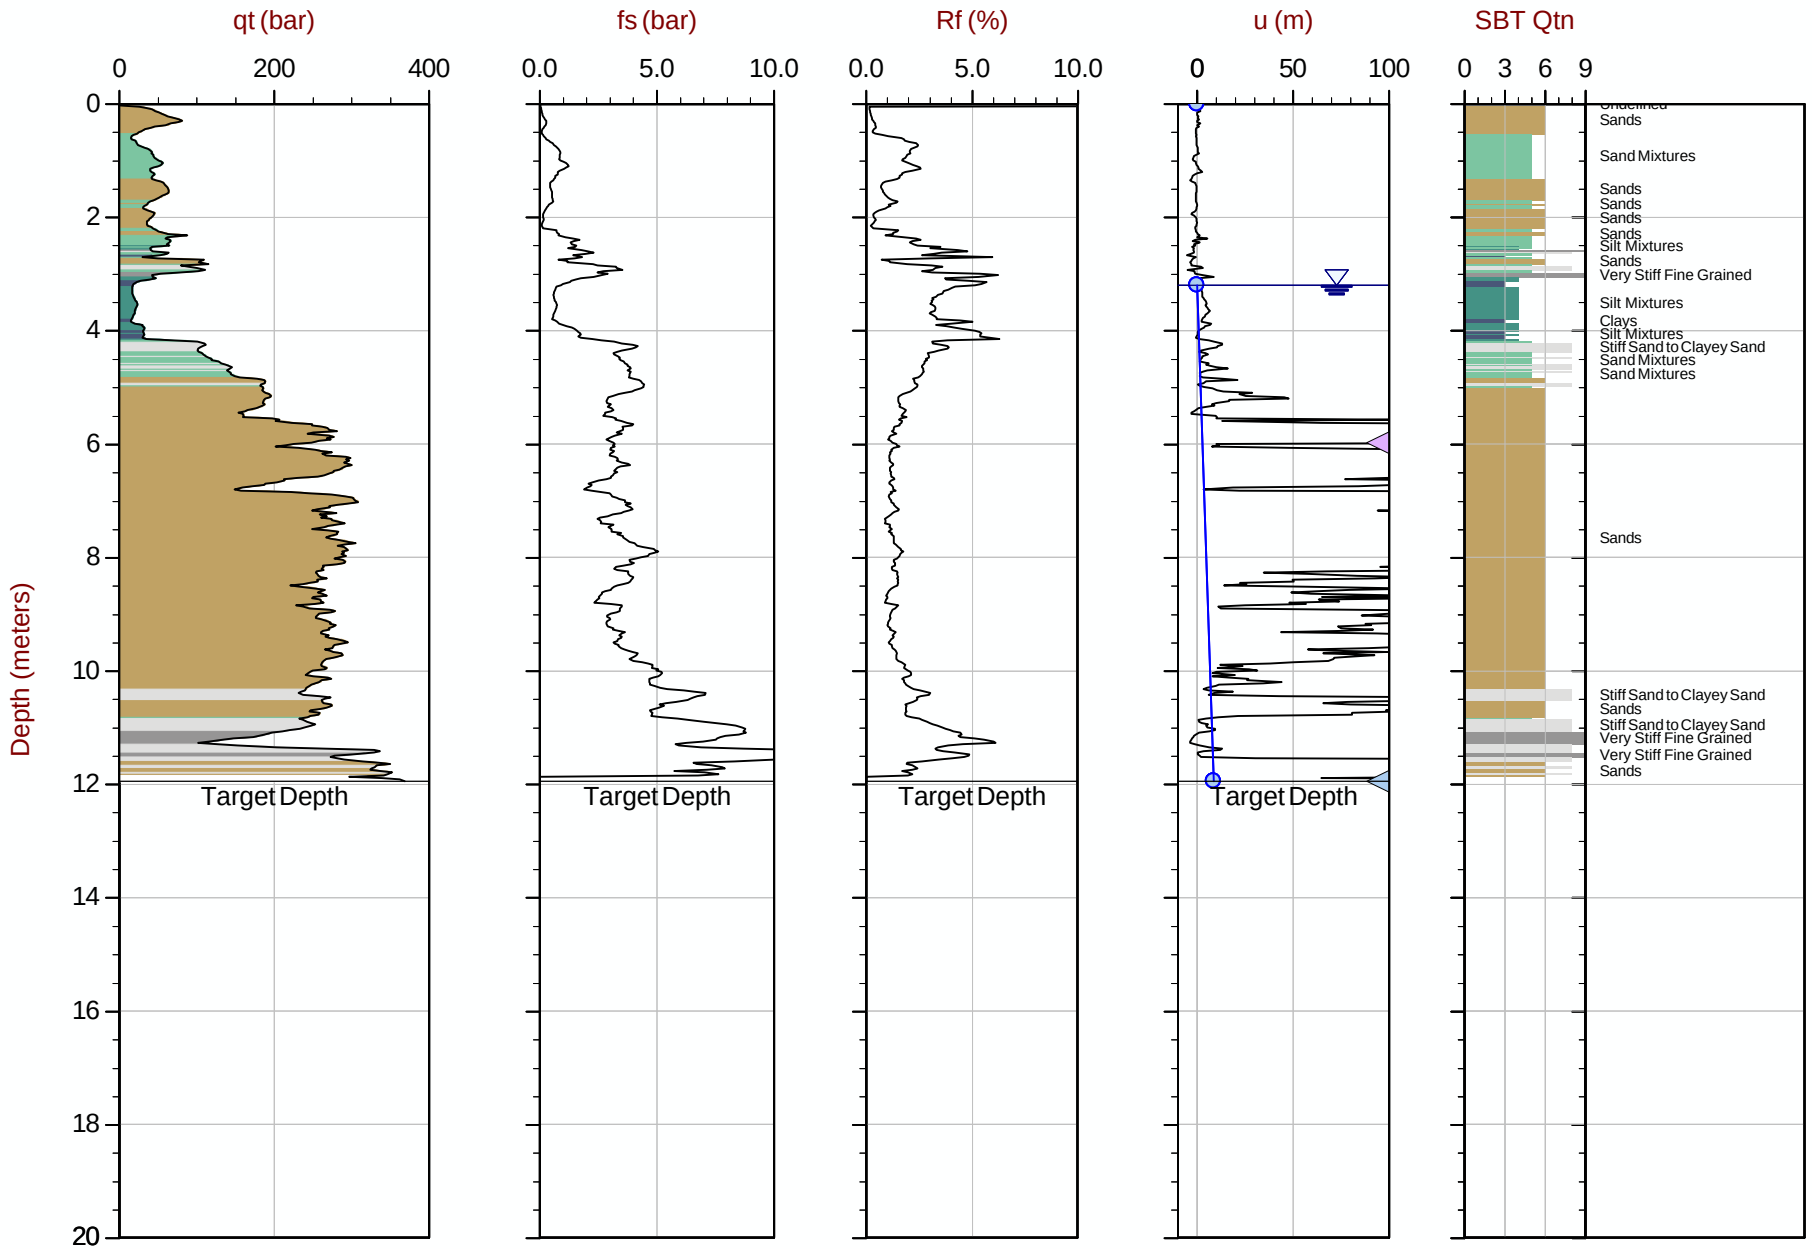

Max Depth: 11.950 m / 39.21 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT240.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610505m E: 416854m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 11:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT241
Cone: 854:T1500F15U35 Area= 15cm2

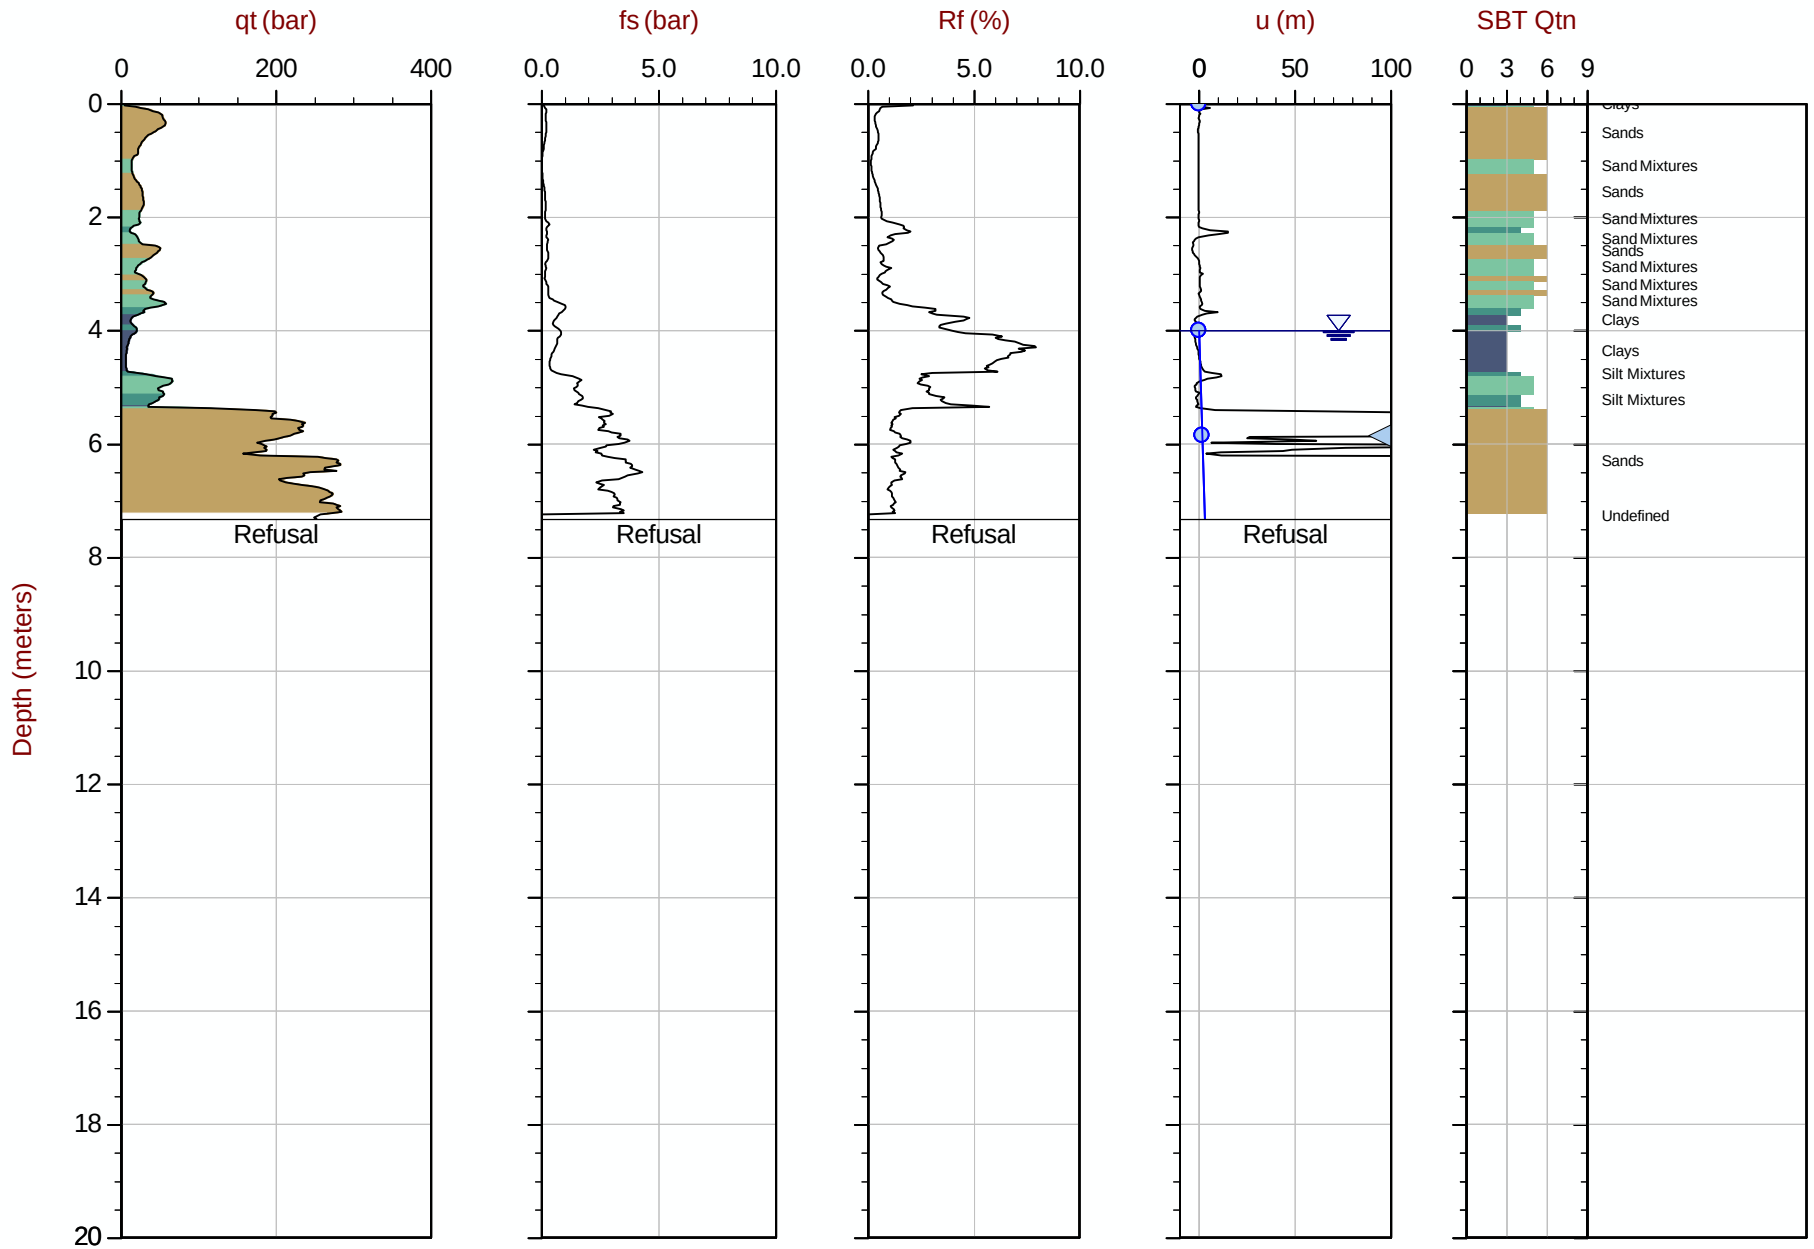

Max Depth: 7.325 m / 24.03 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT241.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610457m E: 416853m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 12:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT242
Cone: 854:T1500F15U35 Area= 15cm2

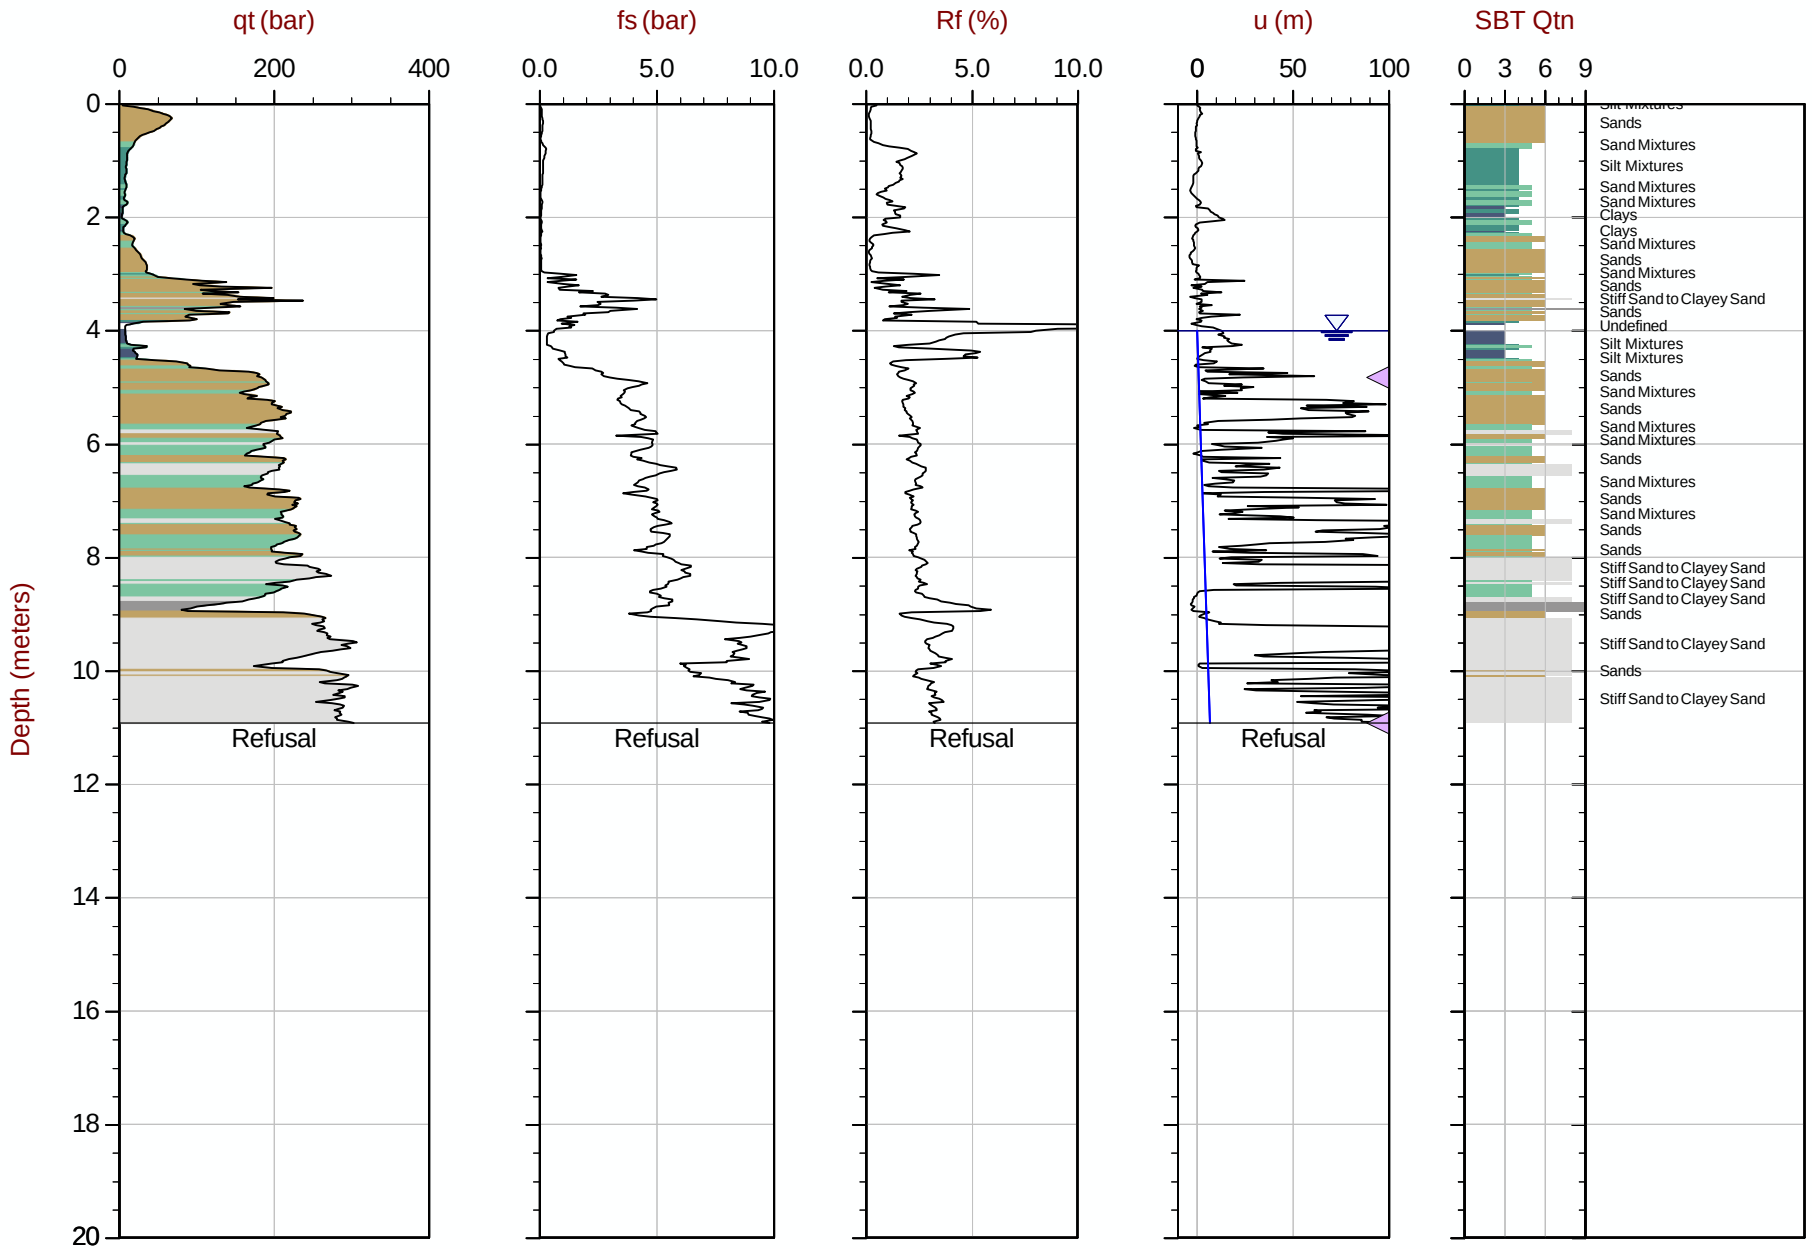

Max Depth: 10.925 m / 35.84 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT242.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610403m E: 416852m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 13:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT243
Cone: 854:T1500F15U35 Area= 15cm2

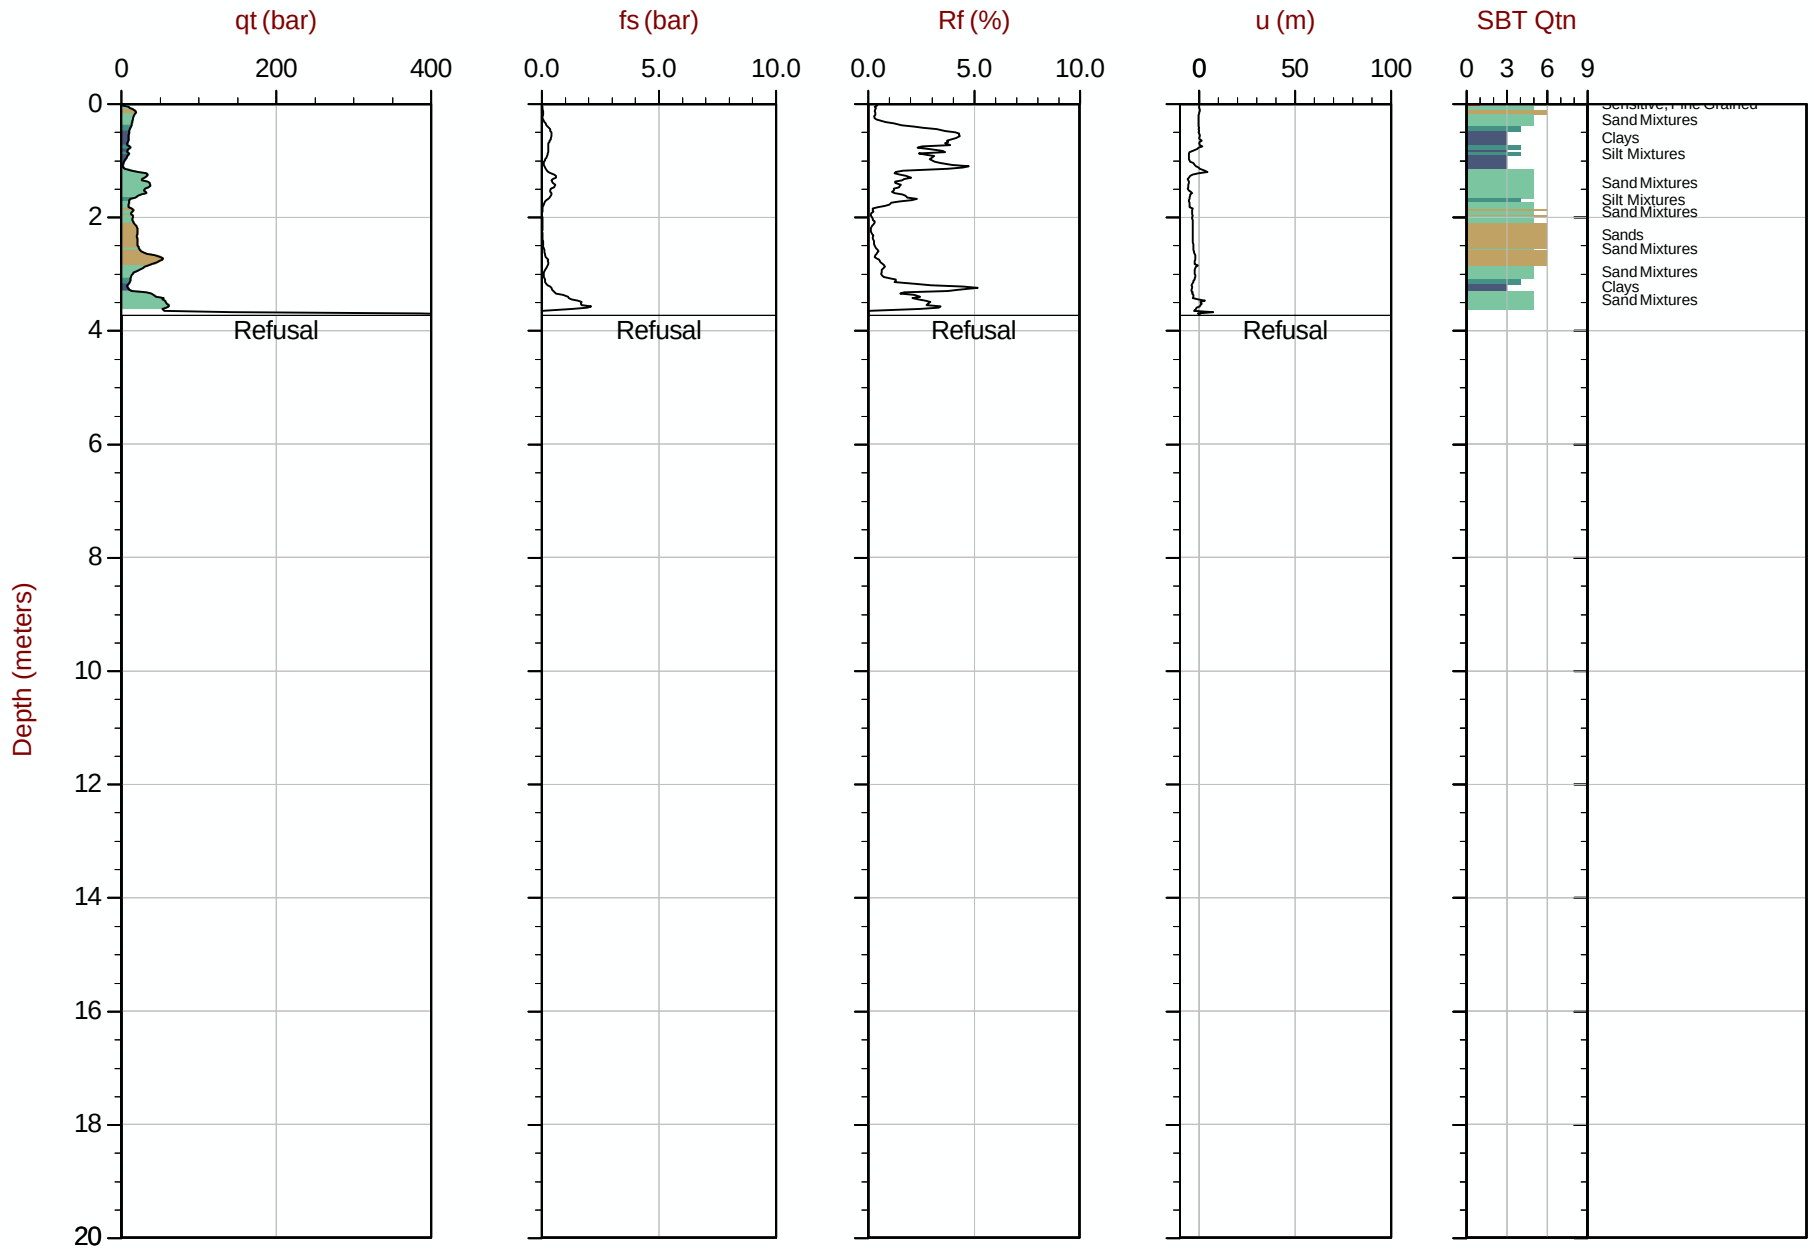

Max Depth: 3.725 m / 12.22 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT243.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610358m E: 416850m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT243A
Cone: 854:T1500F15U35 Area= 15cm2

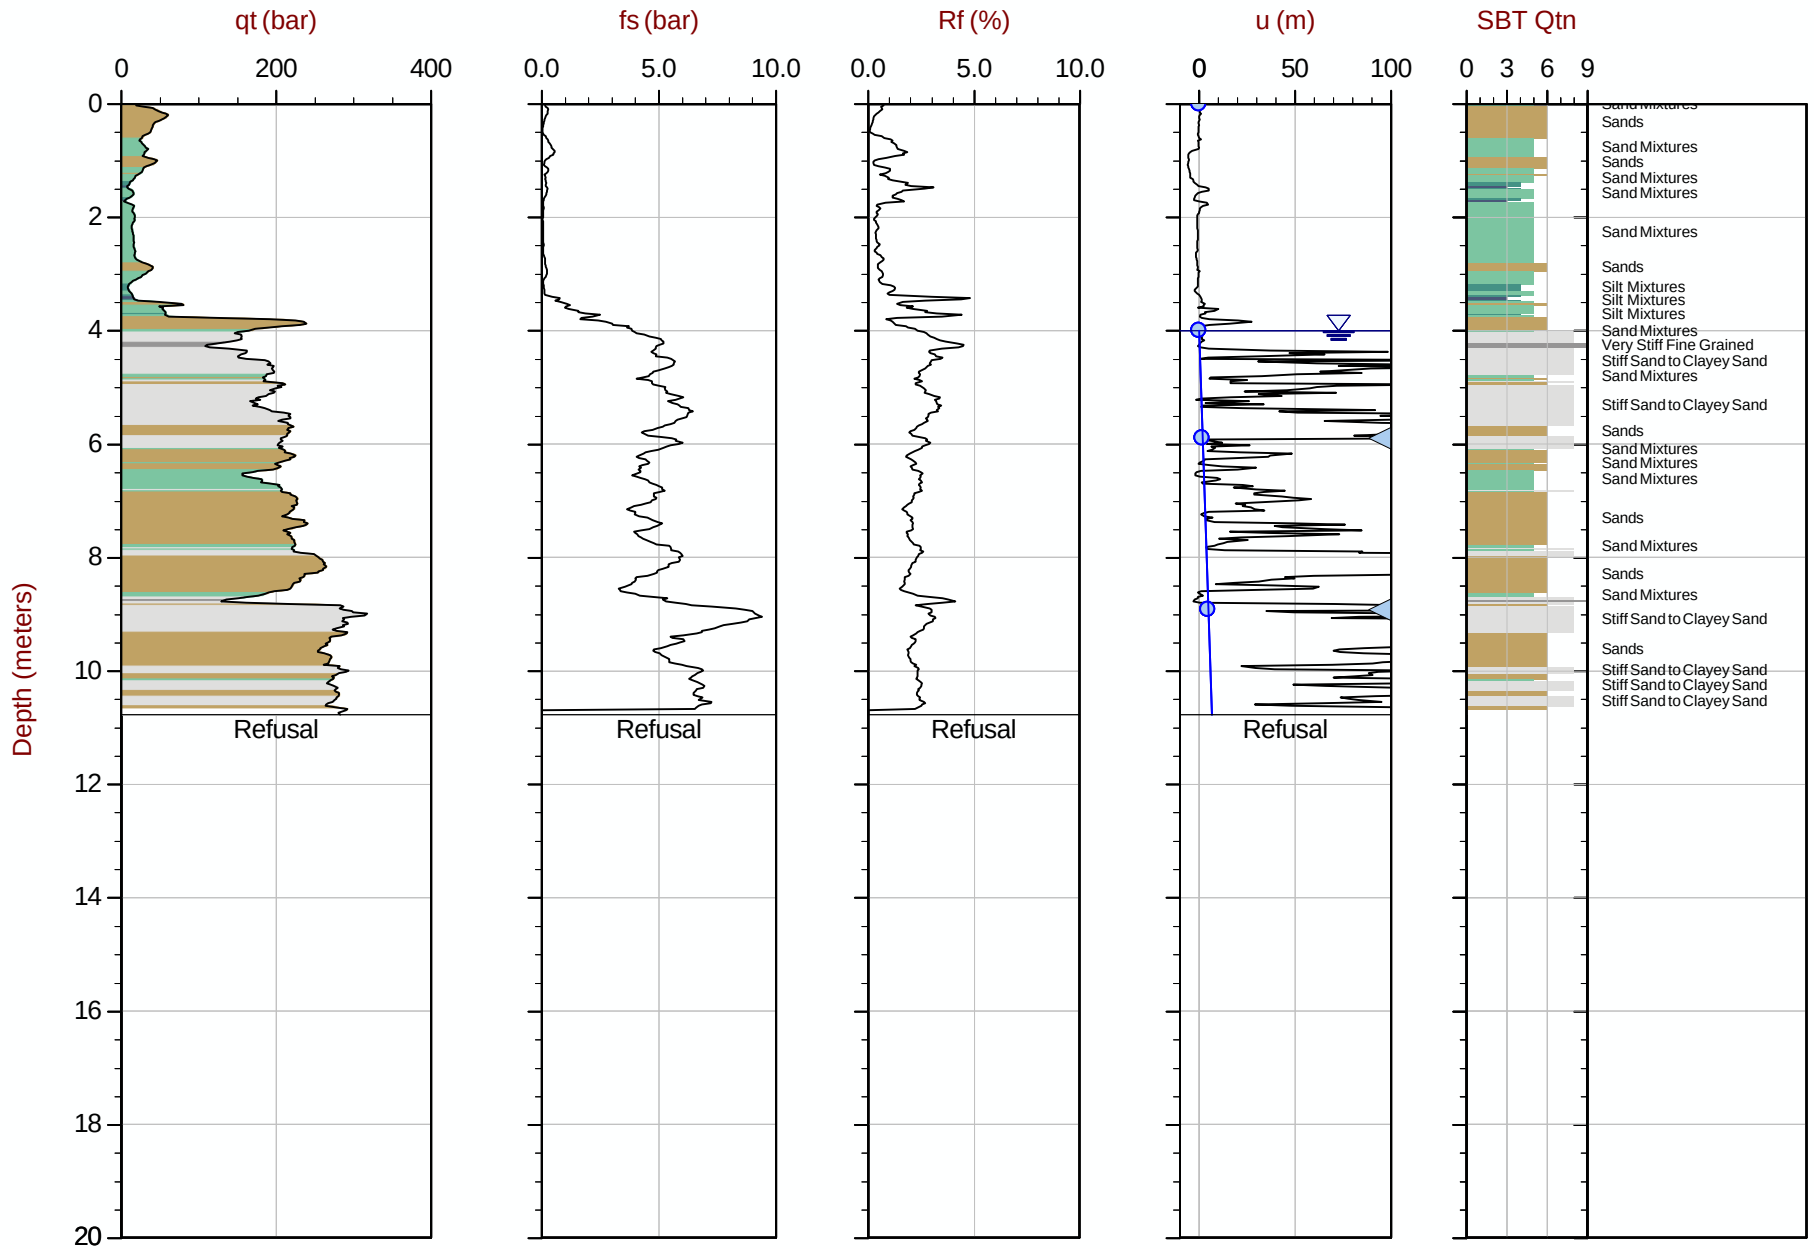

Max Depth: 10.775 m / 35.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT243A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610358m E: 416850m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 15:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT244
Cone: 854:T1500F15U35 Area= 15cm2

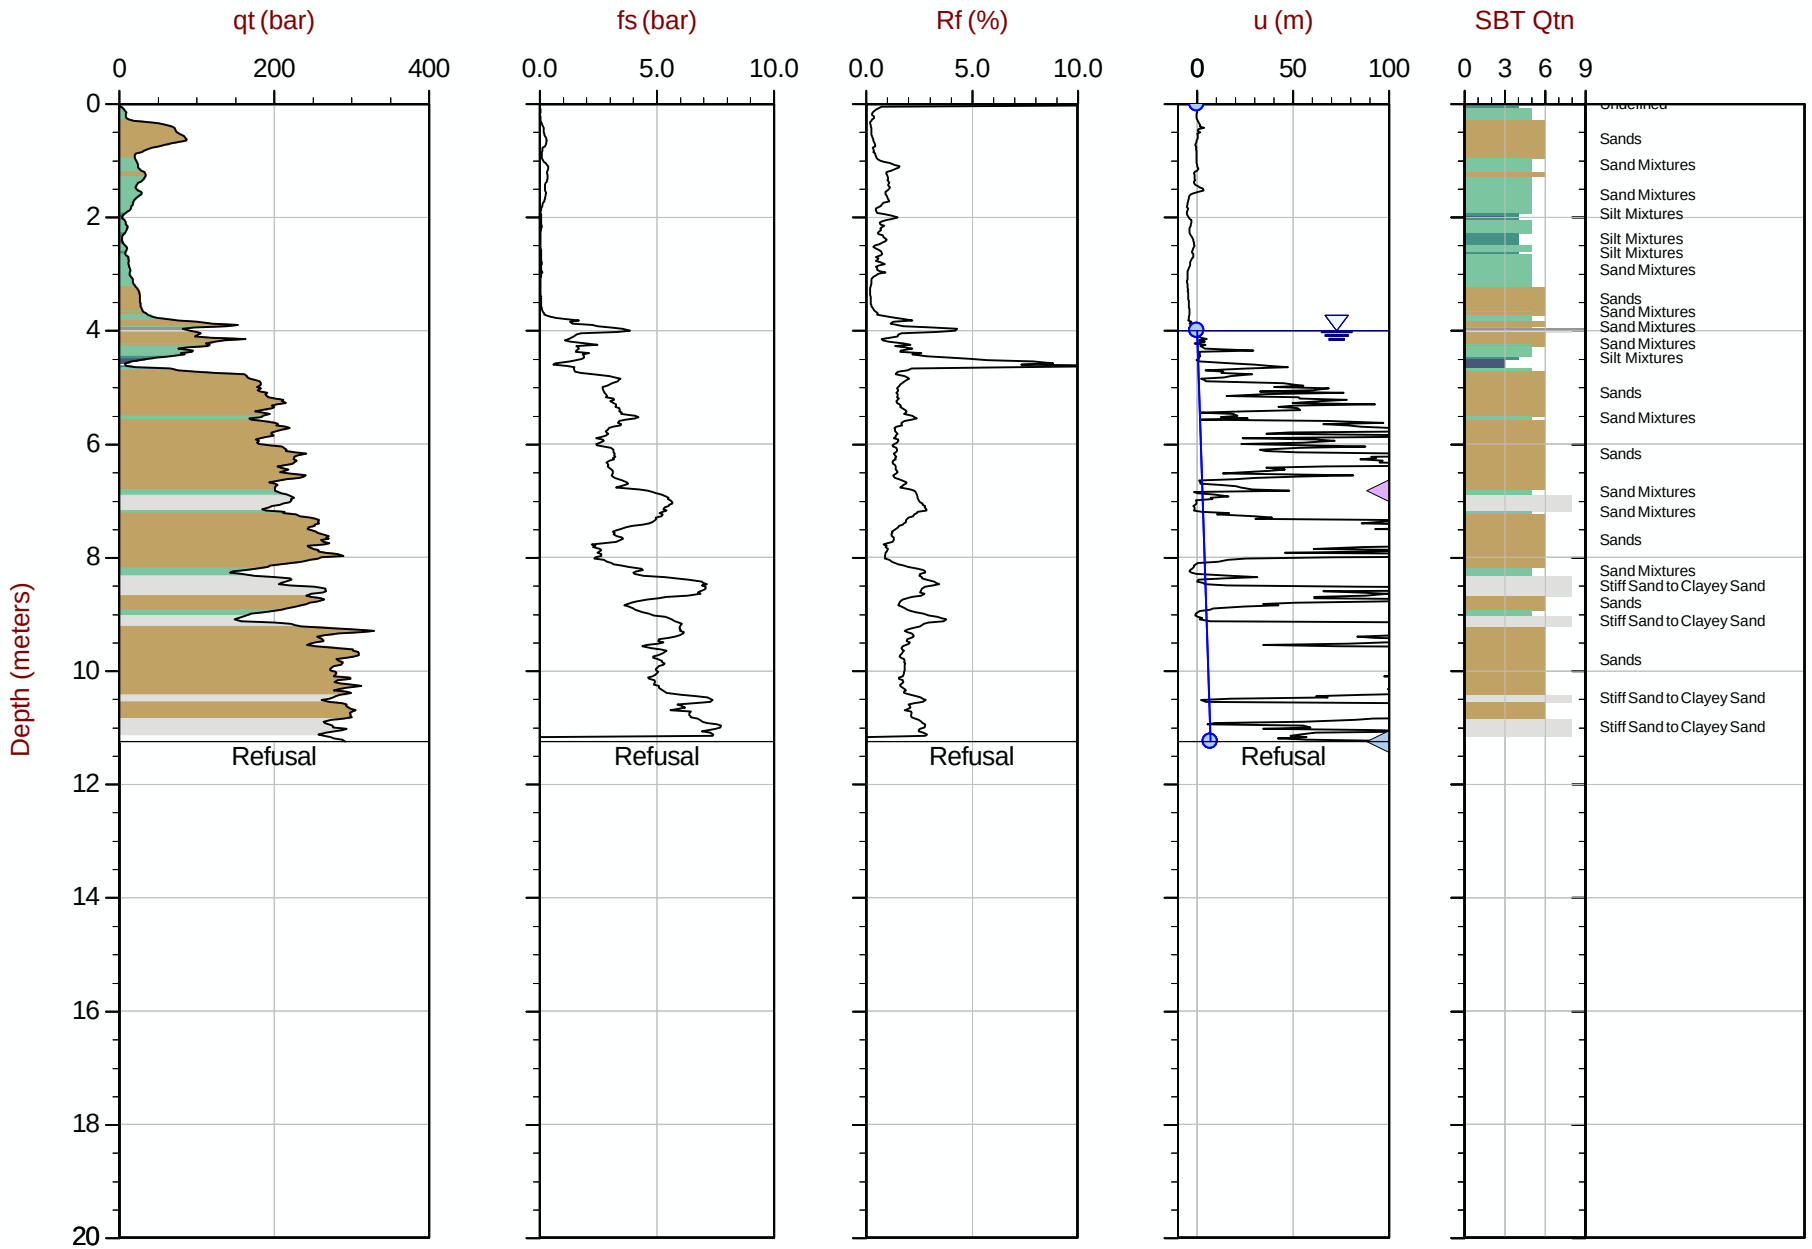

Max Depth: 11.250 m / 36.91 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT244.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610306m E: 416849m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 17:12
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT245
Cone: 854:T1500F15U35 Area= 15cm2

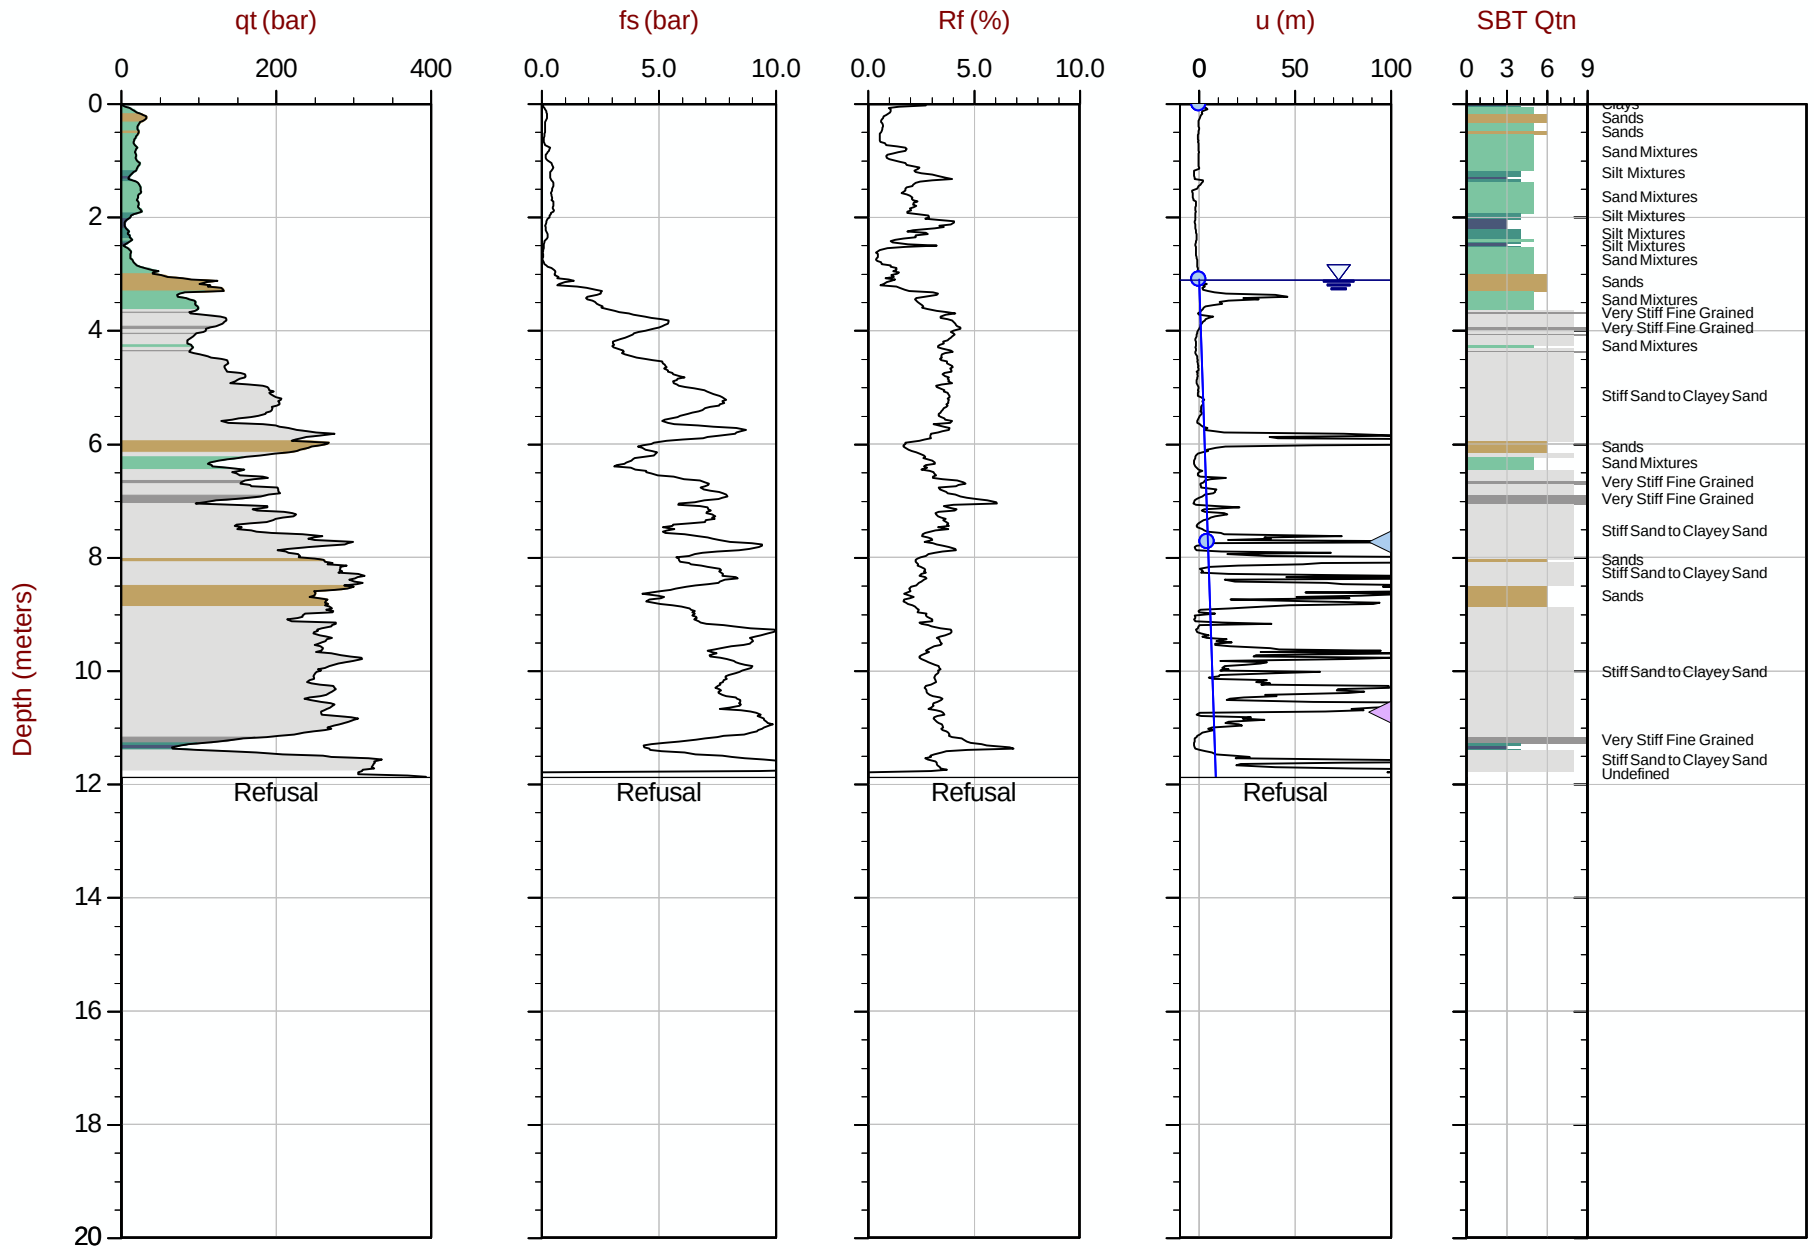

Max Depth: 11.875 m / 38.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT245.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610257m E: 416848m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 13:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT246
Cone: 854:T1500F15U35 Area= 15cm2

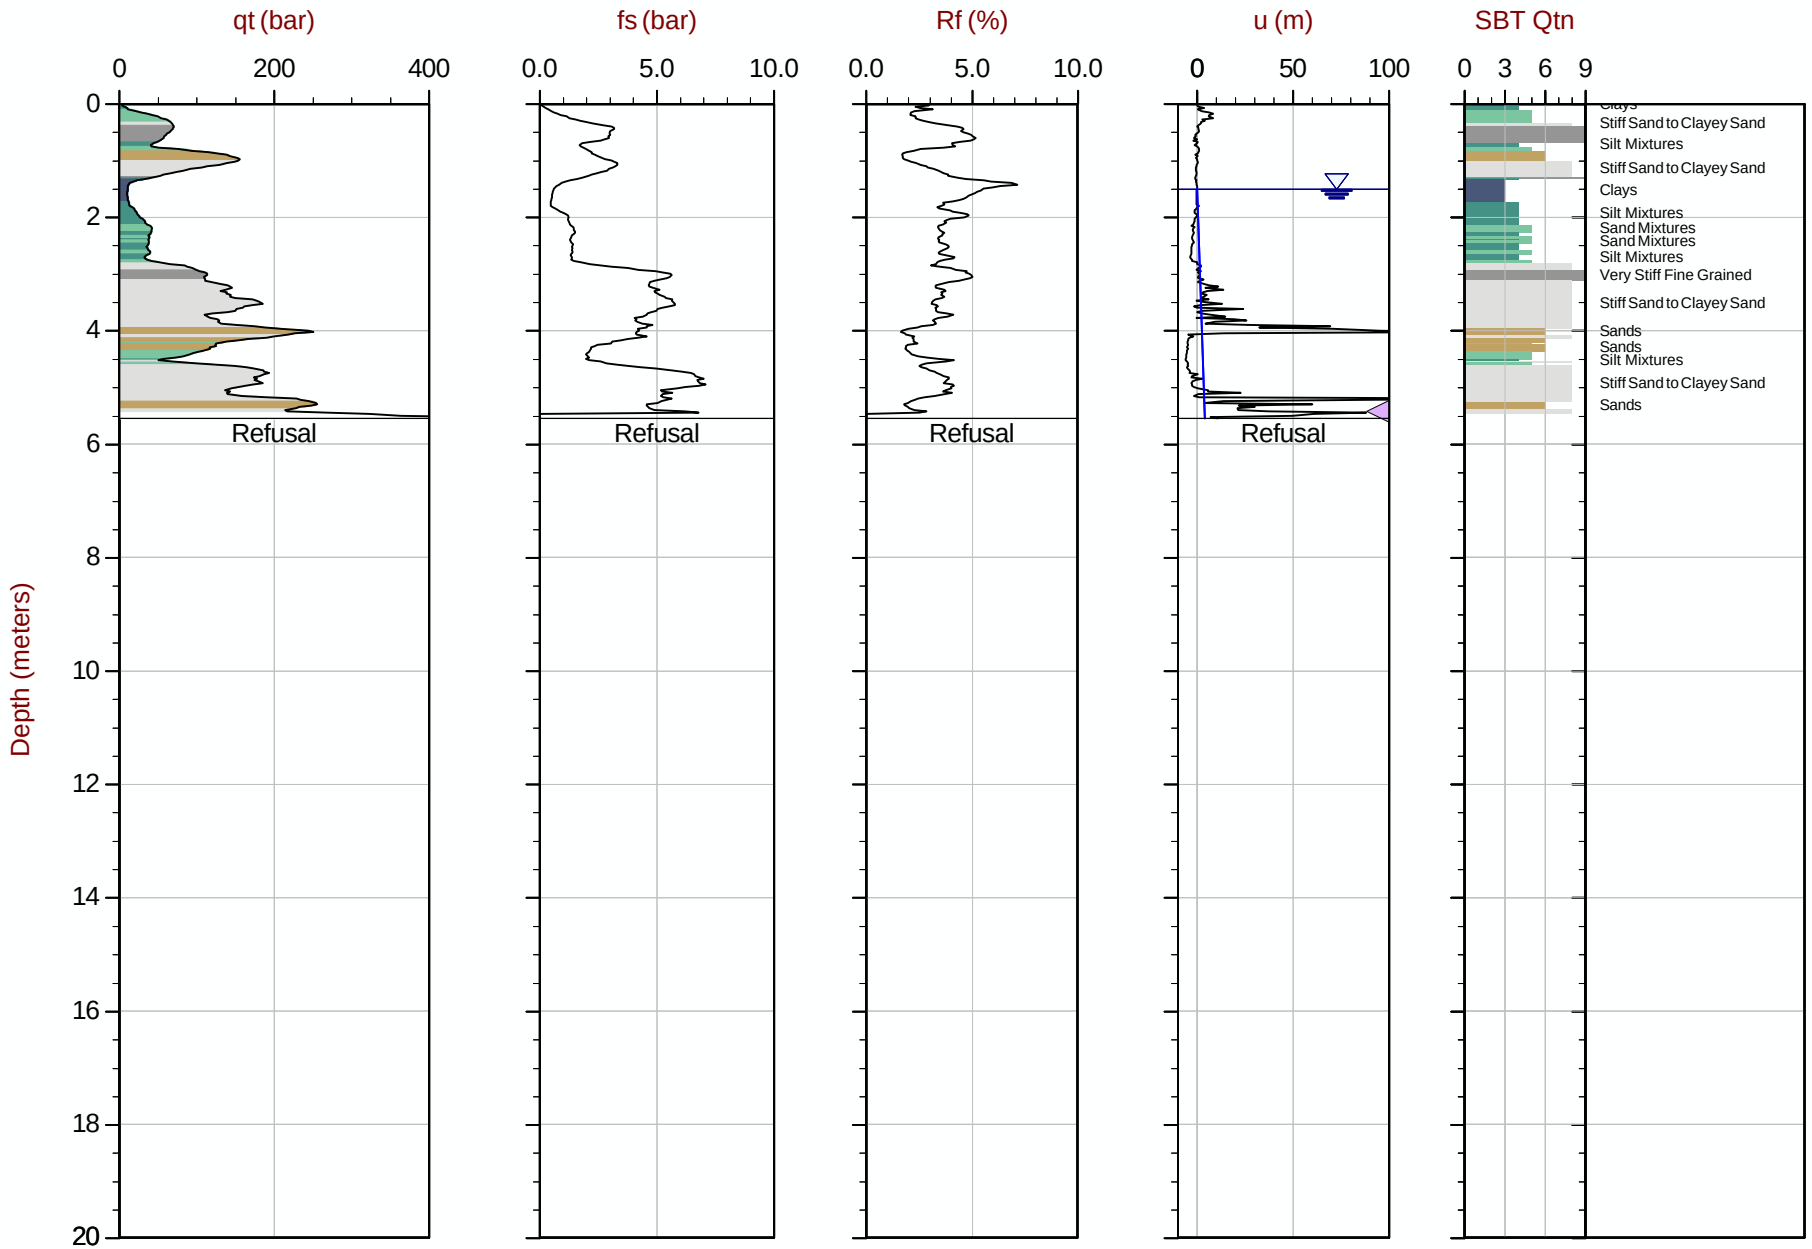

Max Depth: 5.550 m / 18.21 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT246.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610206m E: 416846m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 06:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT247
Cone: 854:T1500F15U35 Area= 15cm2

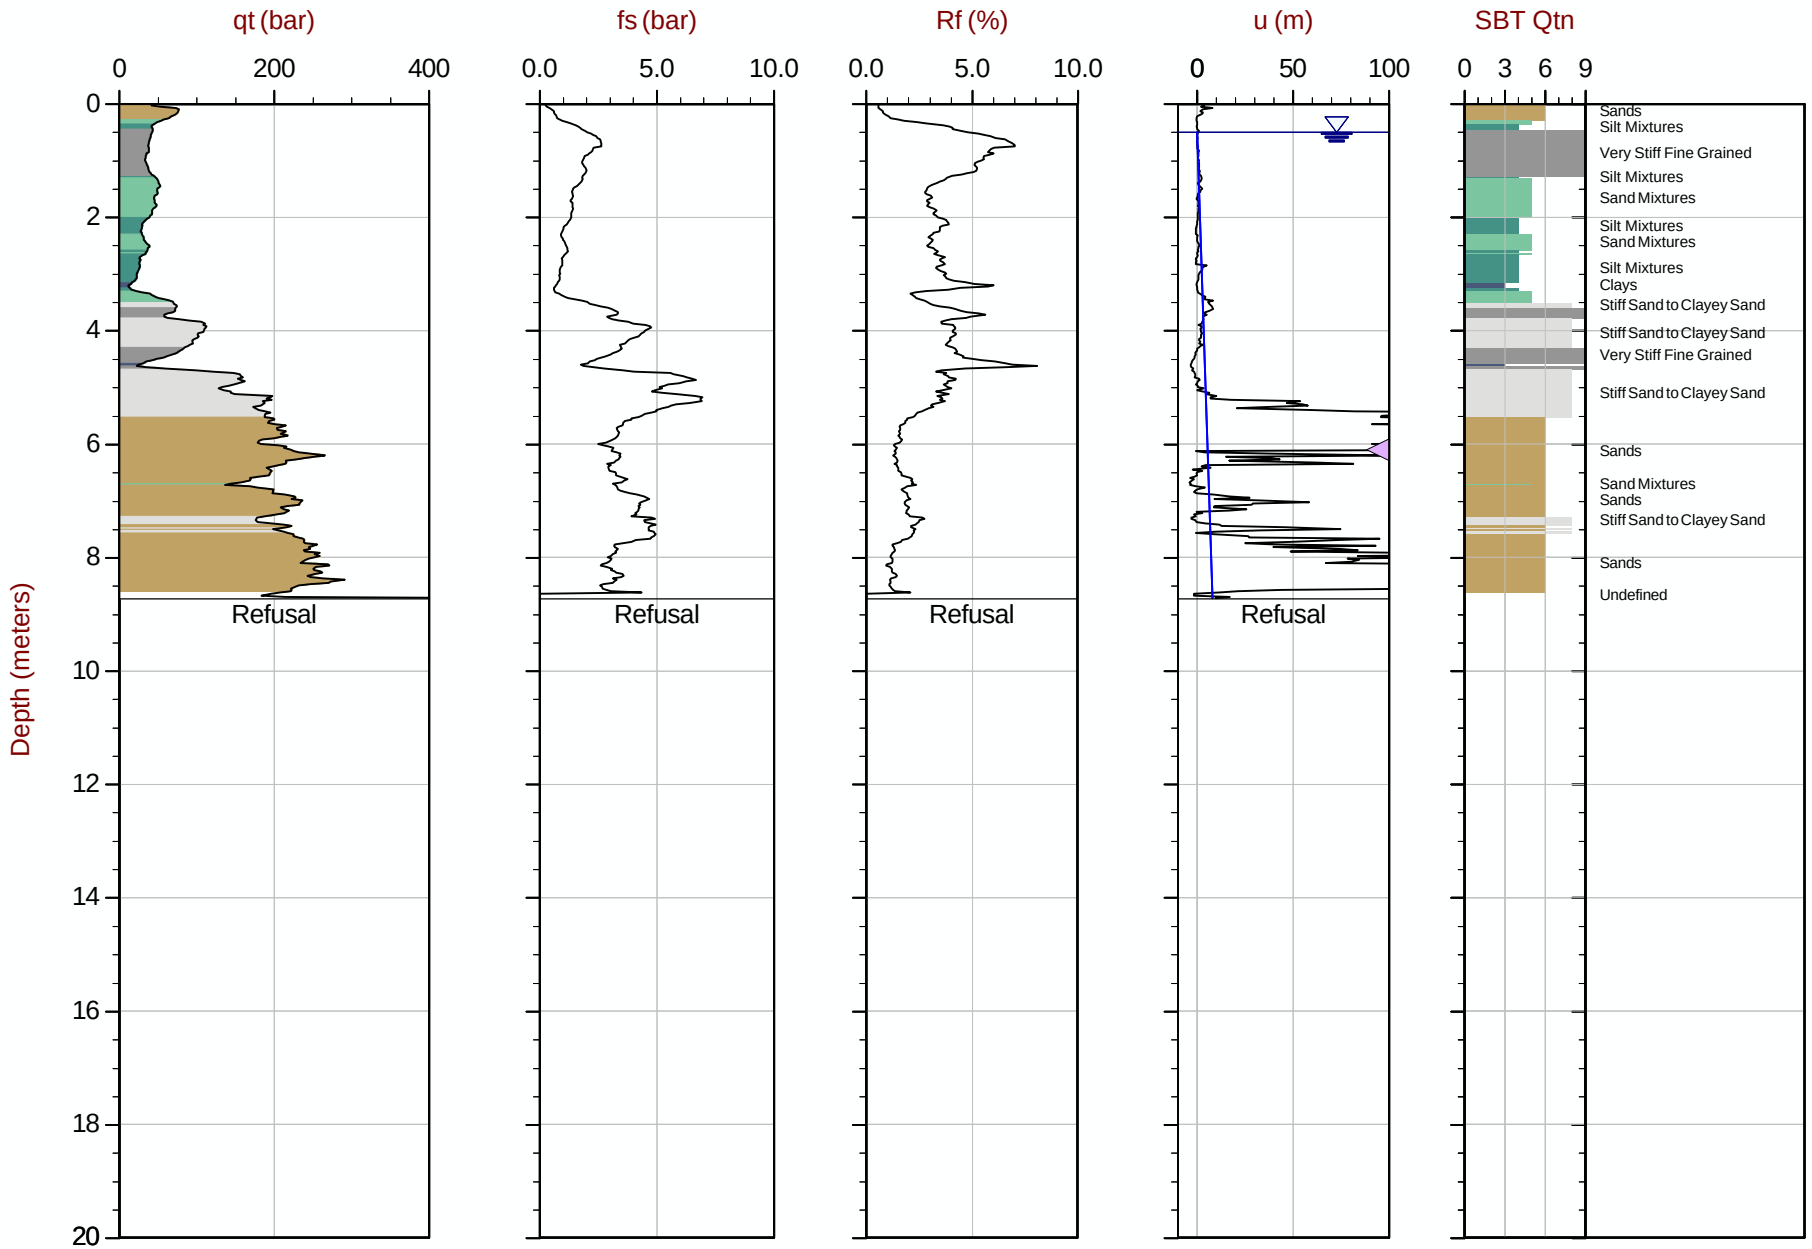

Max Depth: 8.725 m / 28.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT247.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610158m E: 416845m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 08:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT248
Cone: 854:T1500F15U35 Area= 15cm2

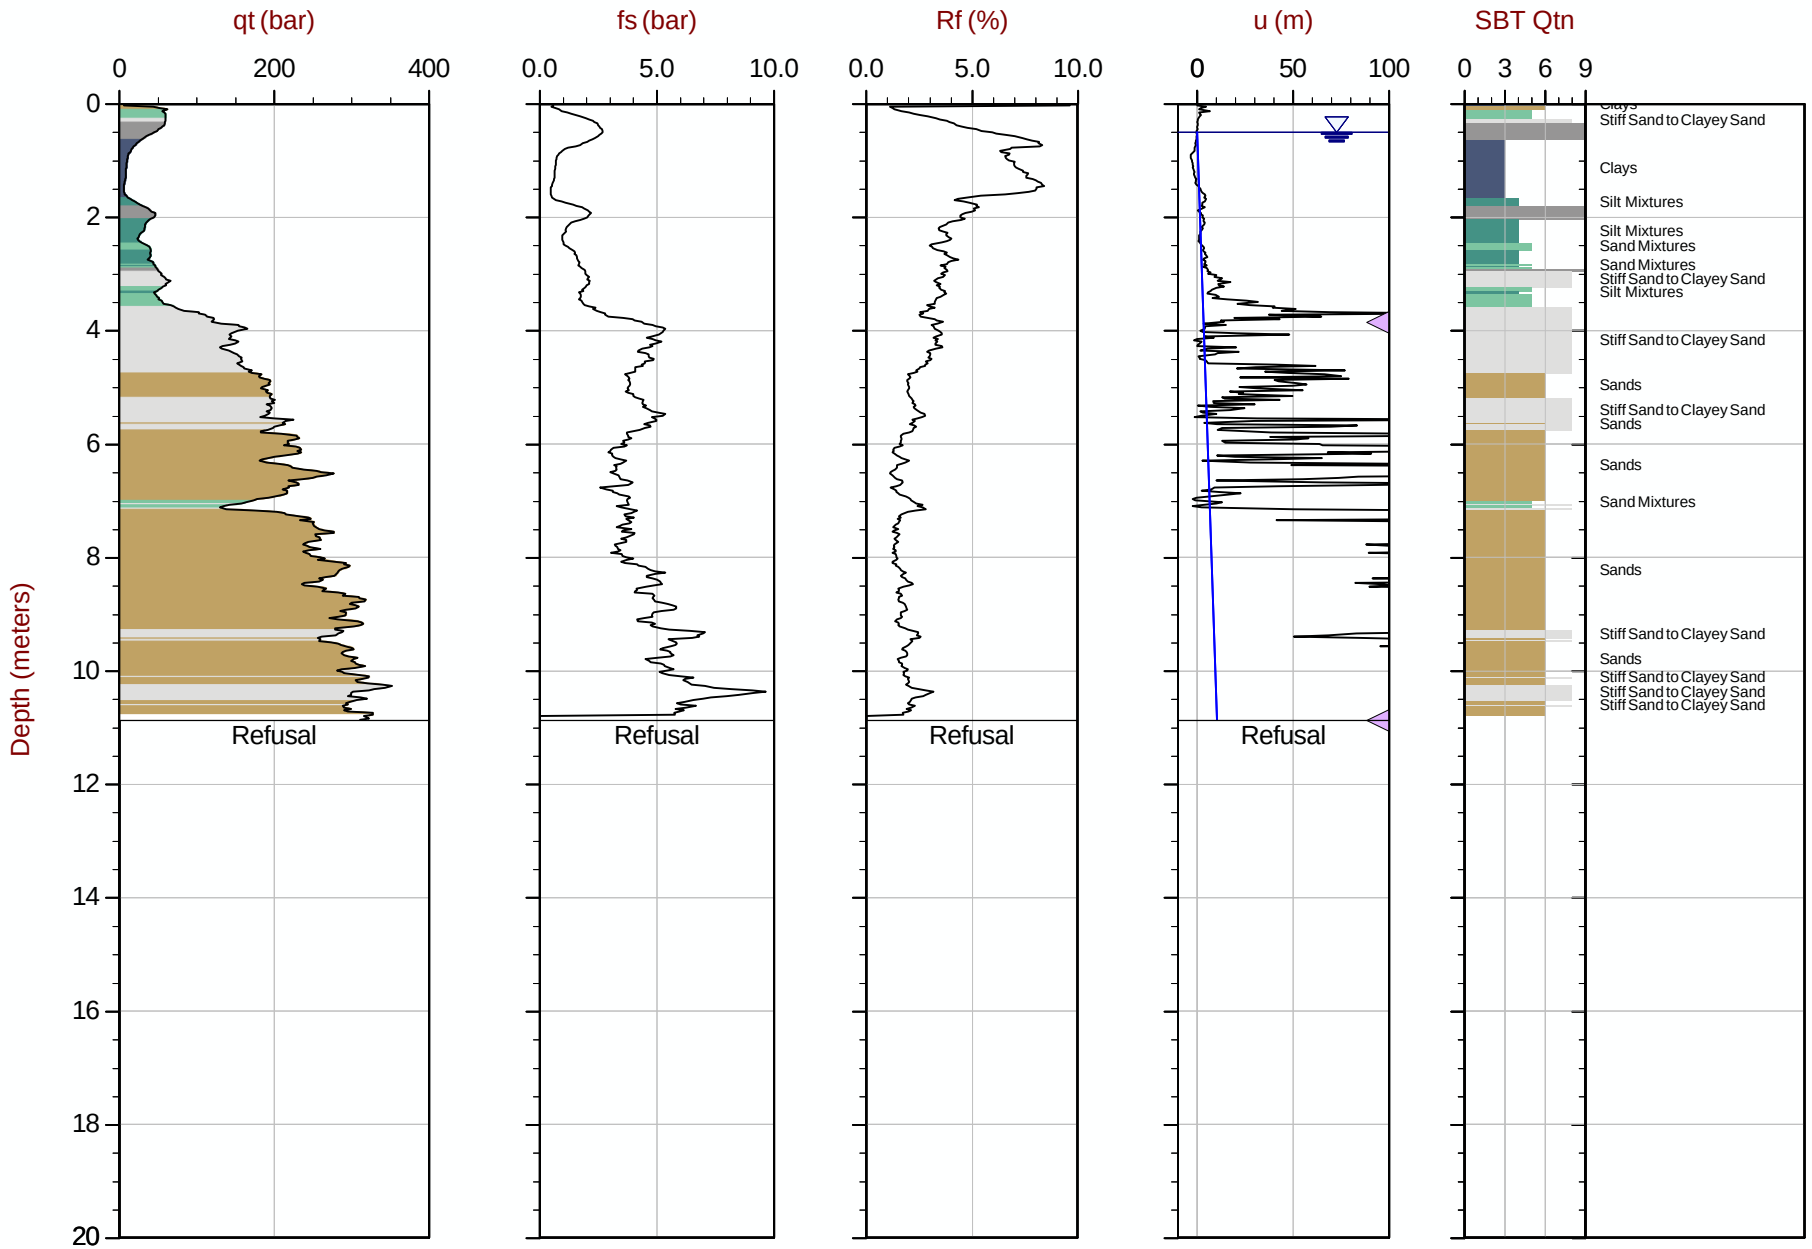

Max Depth: 10.875 m / 35.68 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT248.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610104m E: 416844m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 11:28
Site: Brooks, Alberta

Sounding: RCPT22-22CPT249
Cone: 854:T1500F15U35 Area= 15cm2

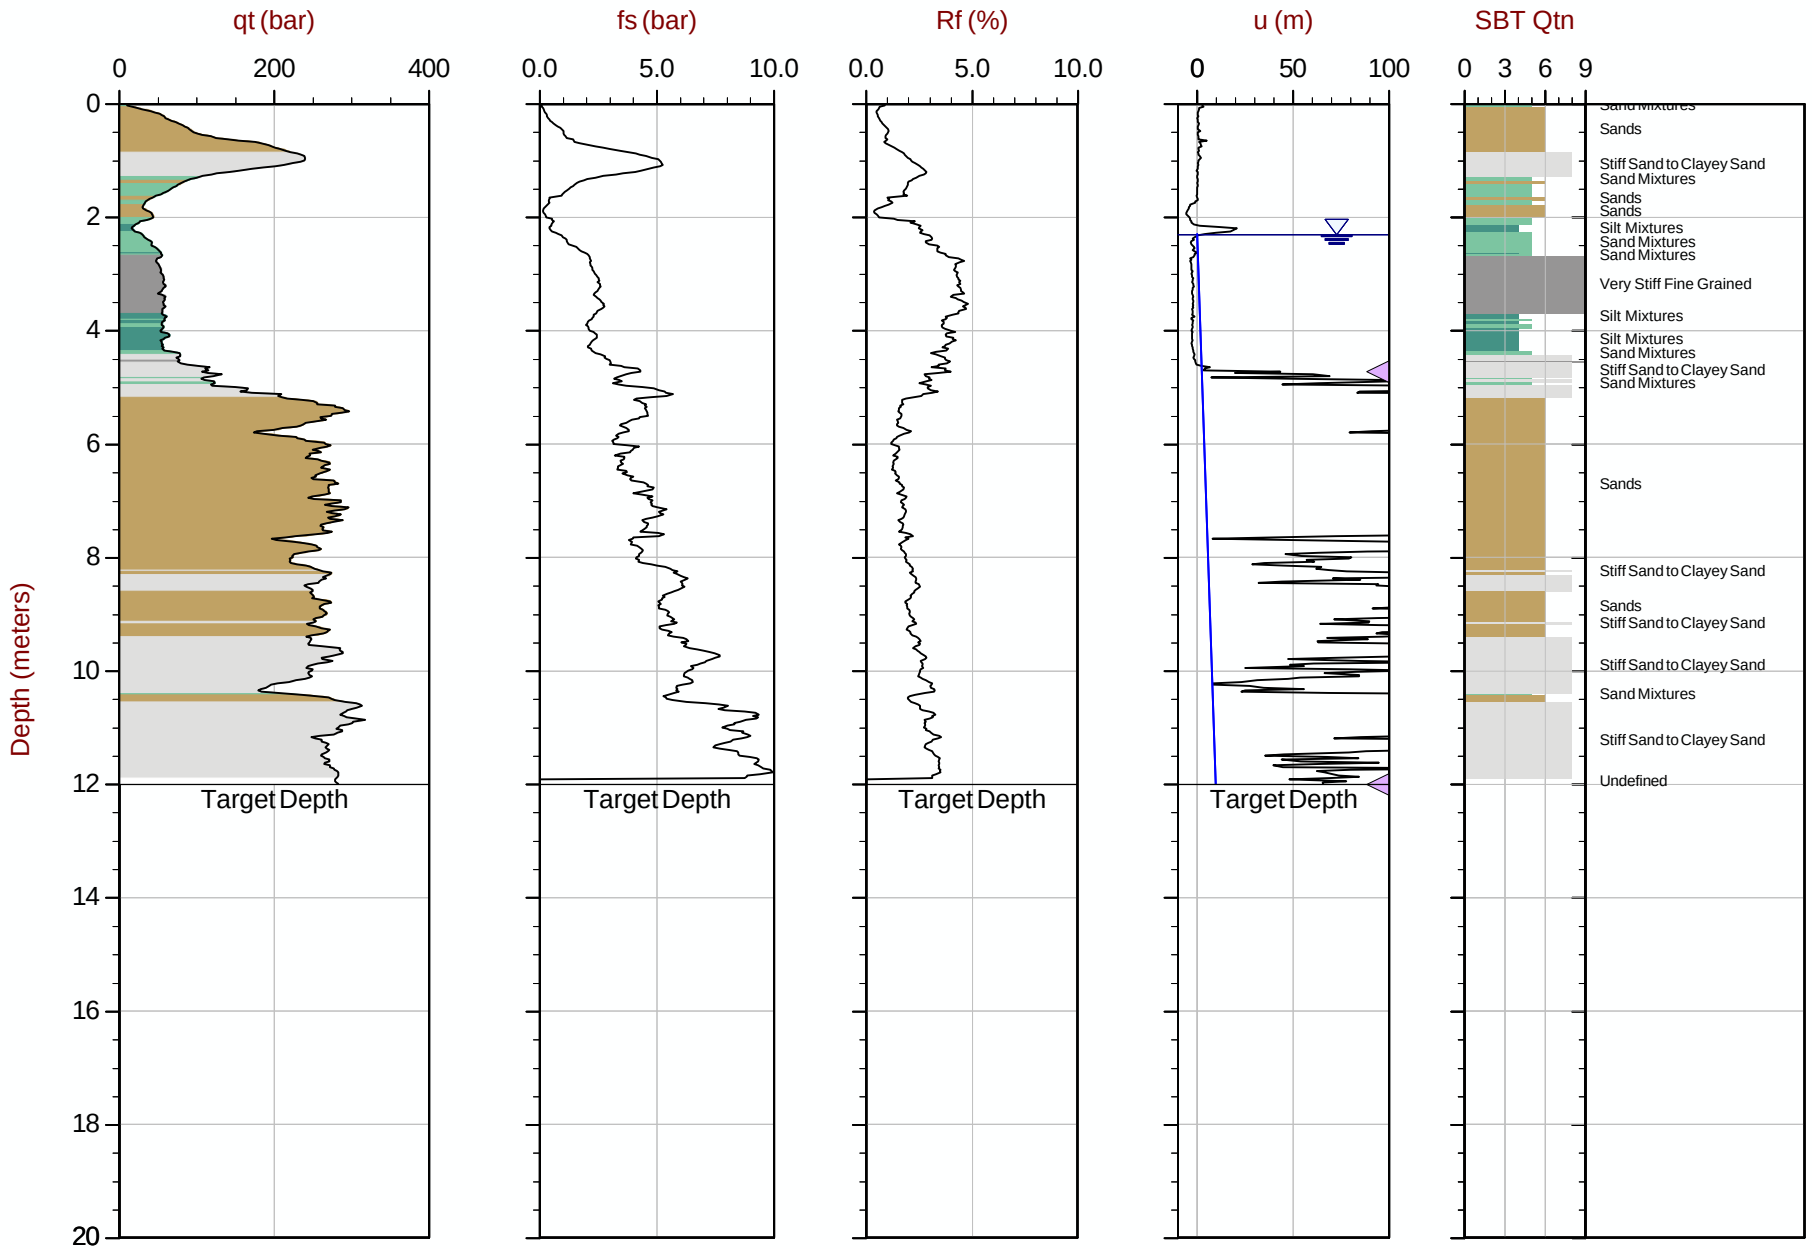

Max Depth: 12.000 m / 39.37 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT249.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610060m E: 416844m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 12:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT250
Cone: 854:T1500F15U35 Area= 15cm2

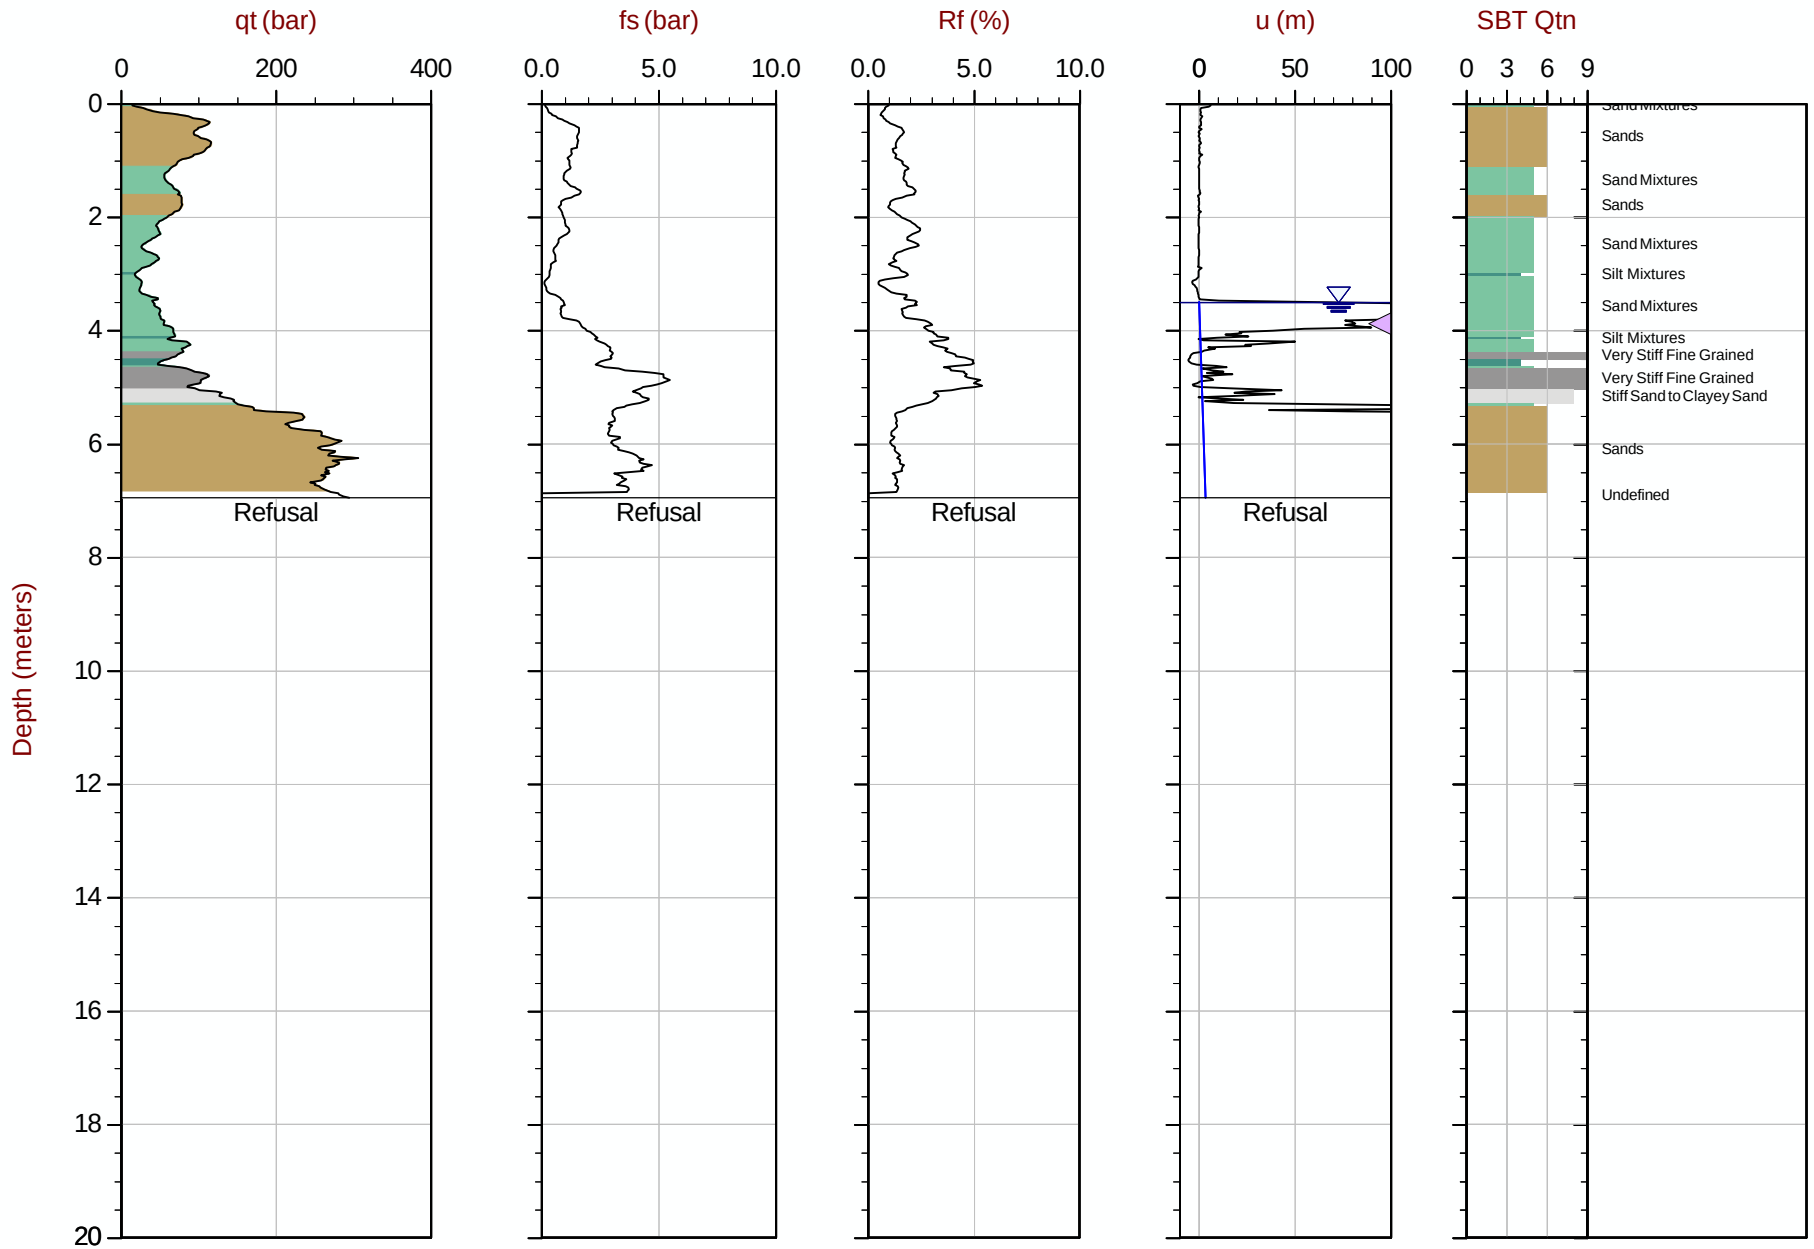

Max Depth: 6.950 m / 22.80 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT250.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610009m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 13:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT251
Cone: 854:T1500F15U35 Area= 15cm2

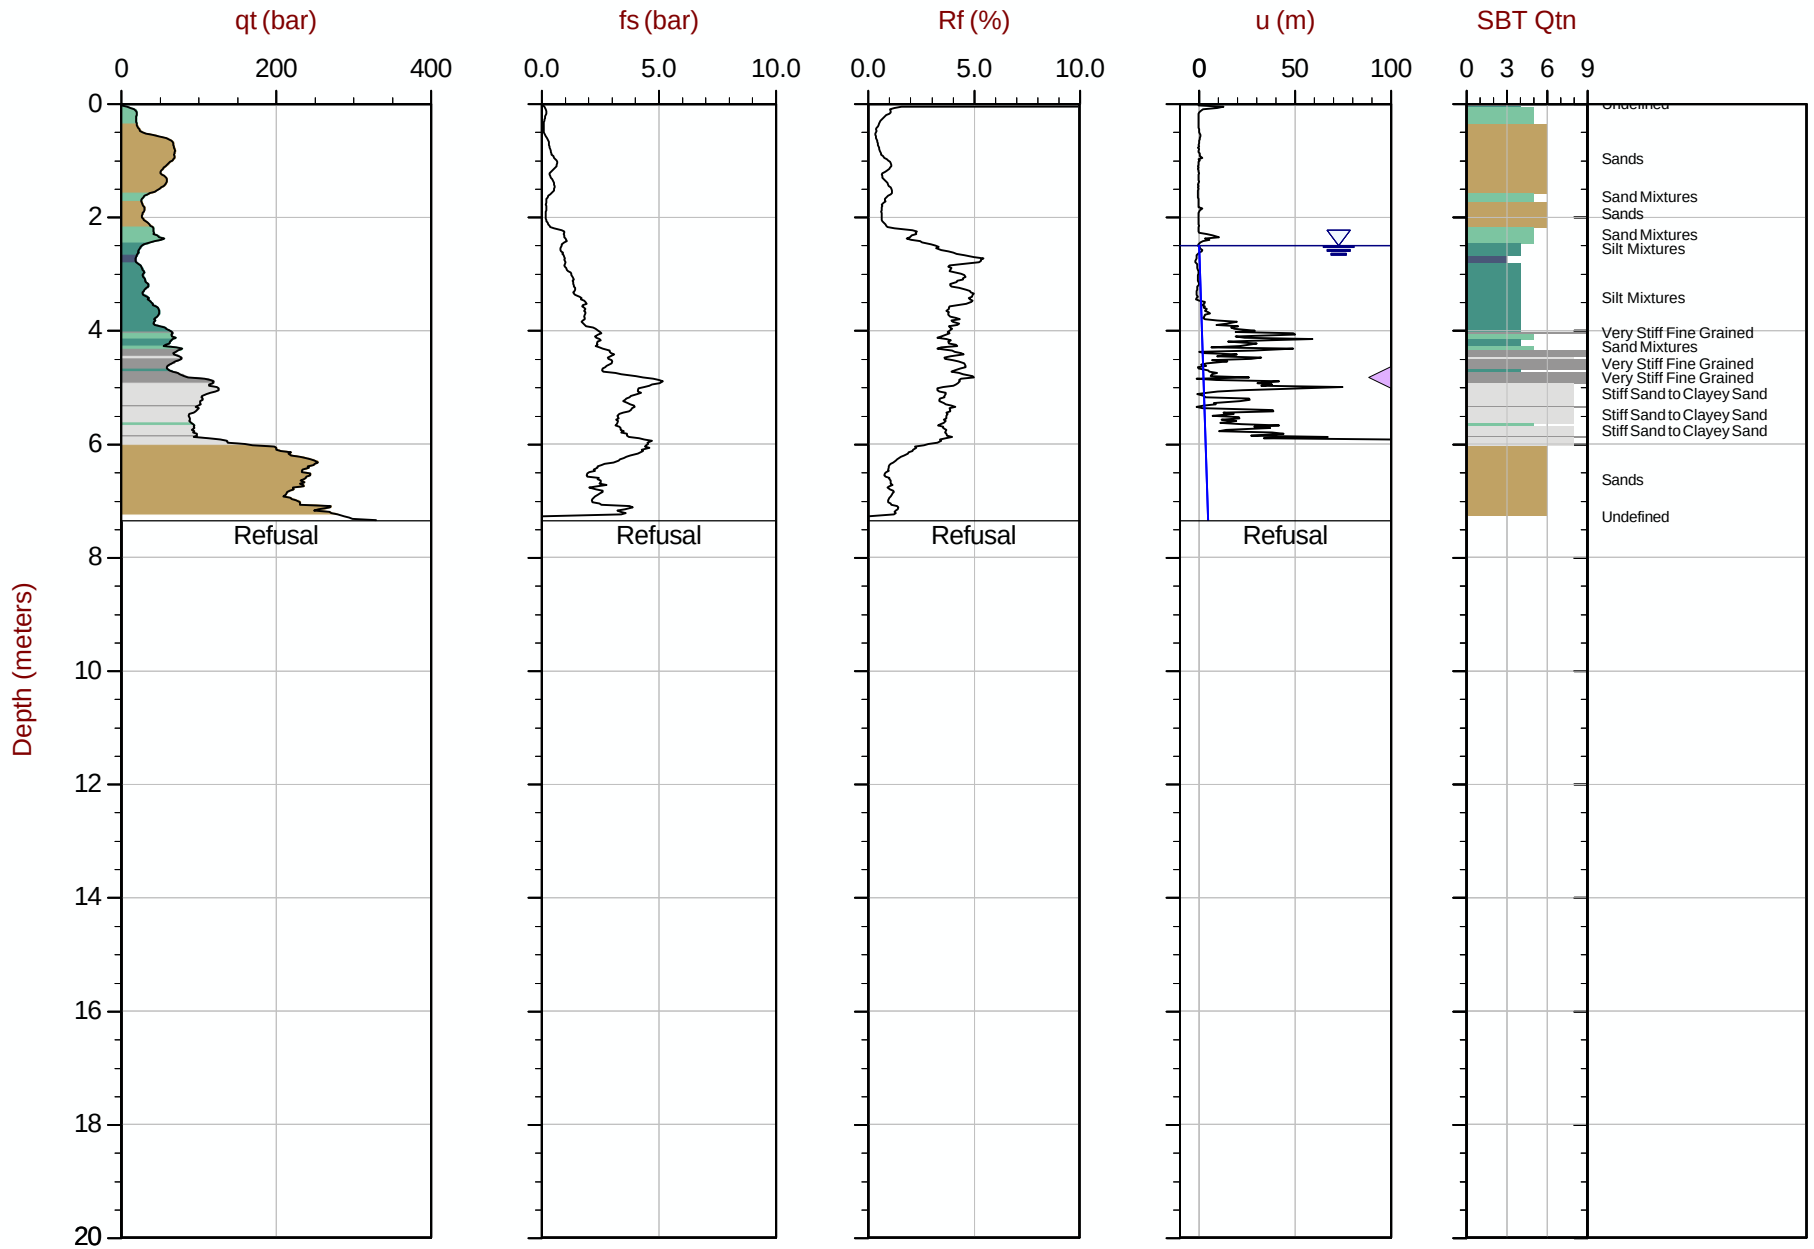

Max Depth: 7.350 m / 24.11 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT251.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609960m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 15:05
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT252
Cone: 854:T1500F15U35 Area= 15cm2

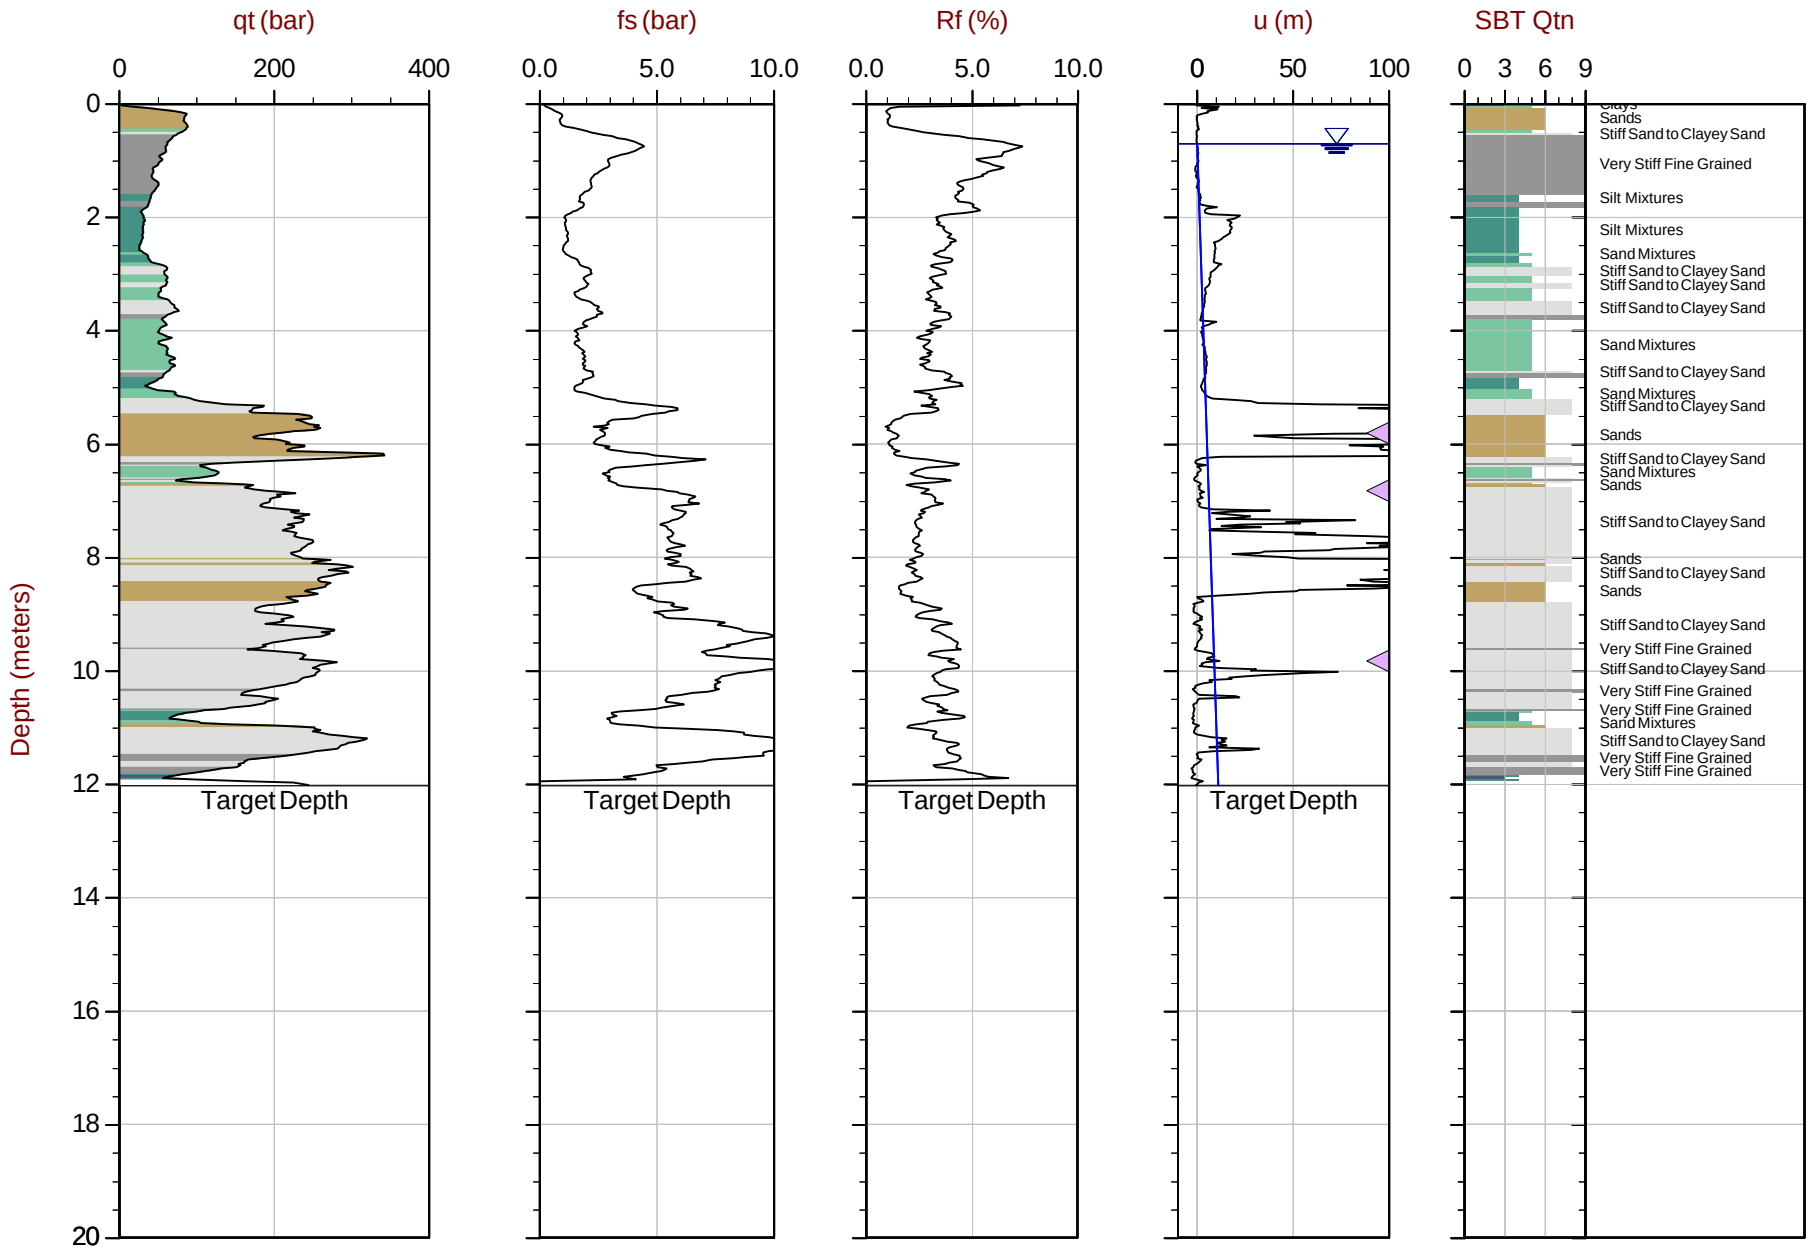

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT252.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609909m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 07:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT253
Cone: 854:T1500F15U35 Area= 15cm2

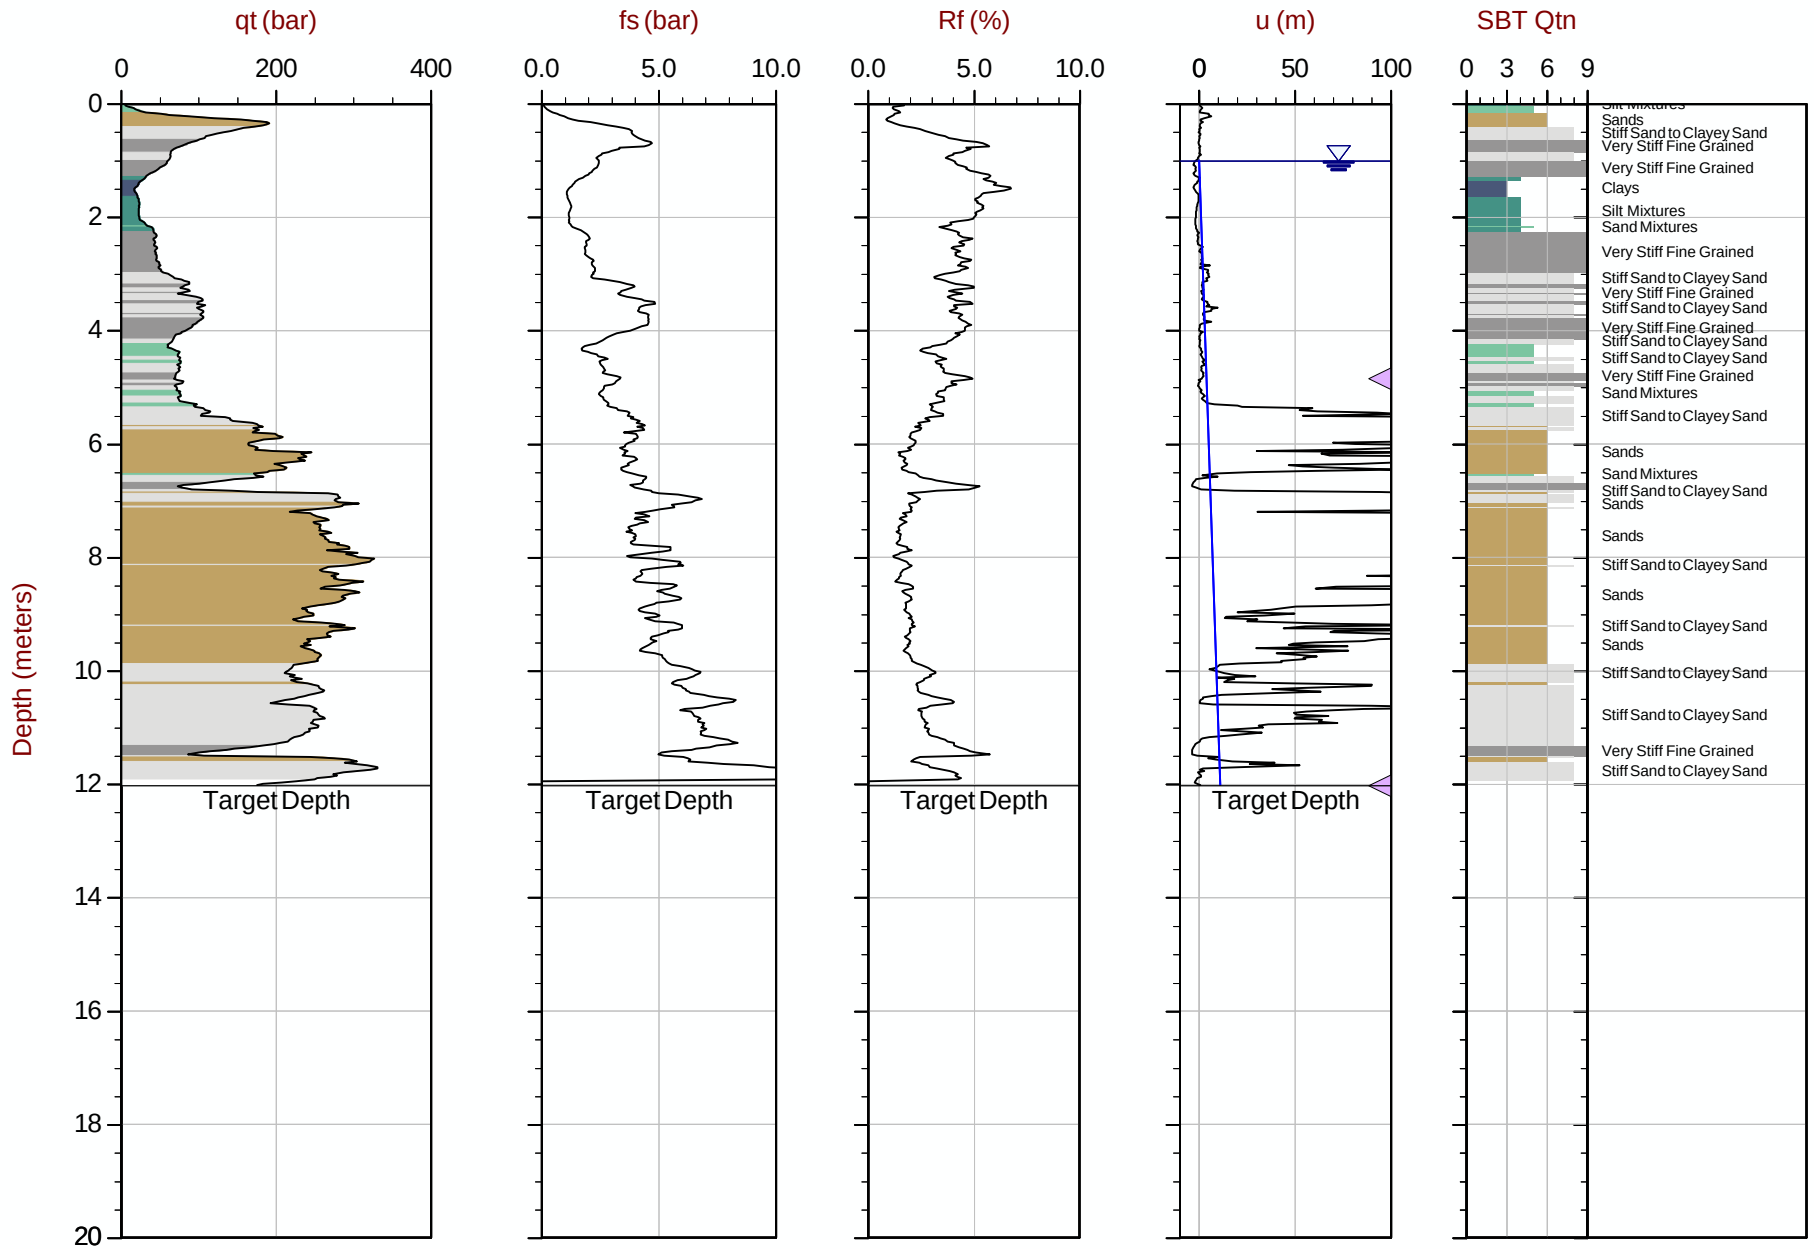

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22_22CPT253.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609860m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 11:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT254
Cone: 854:T1500F15U35 Area= 15cm2

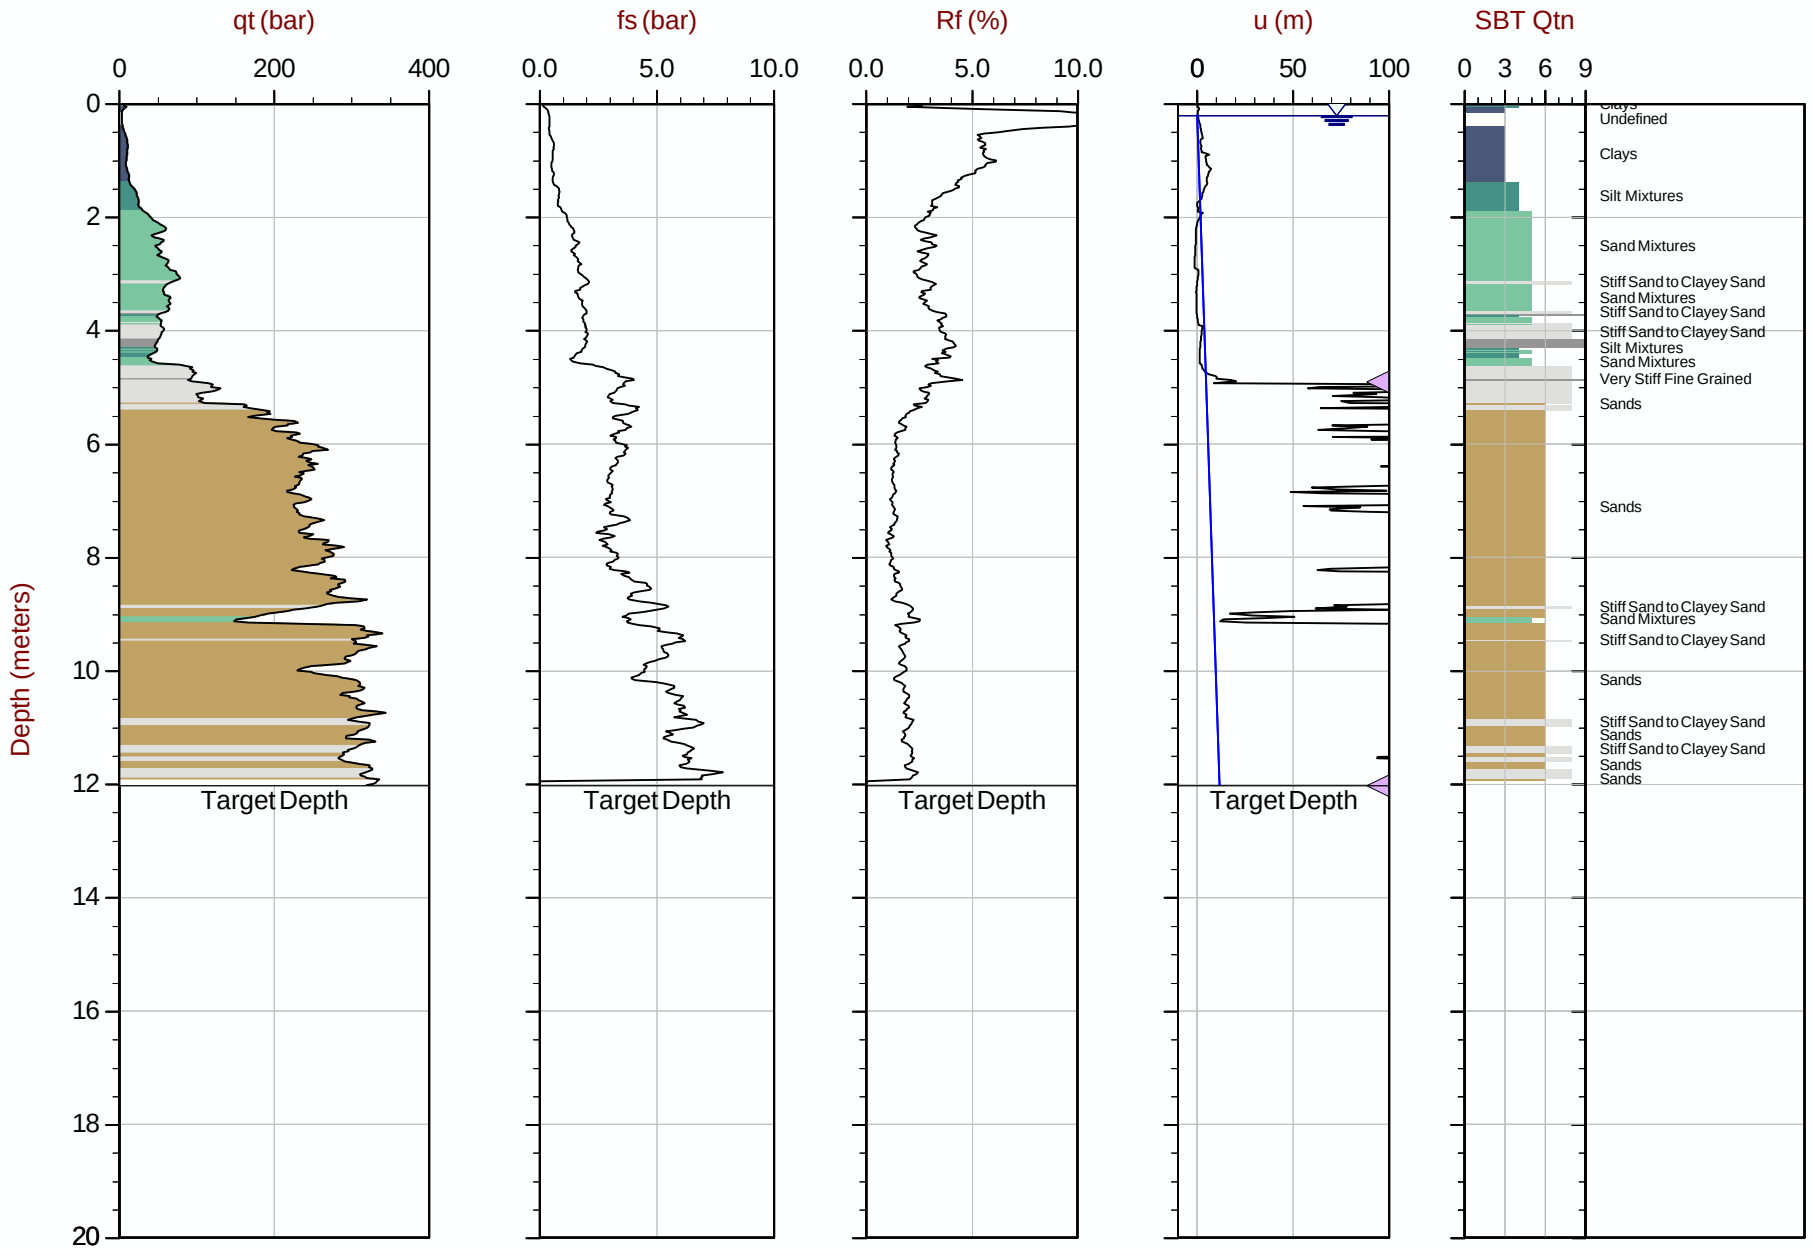

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT254.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609809m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 12:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT255
Cone: 854:T1500F15U35 Area= 15cm2

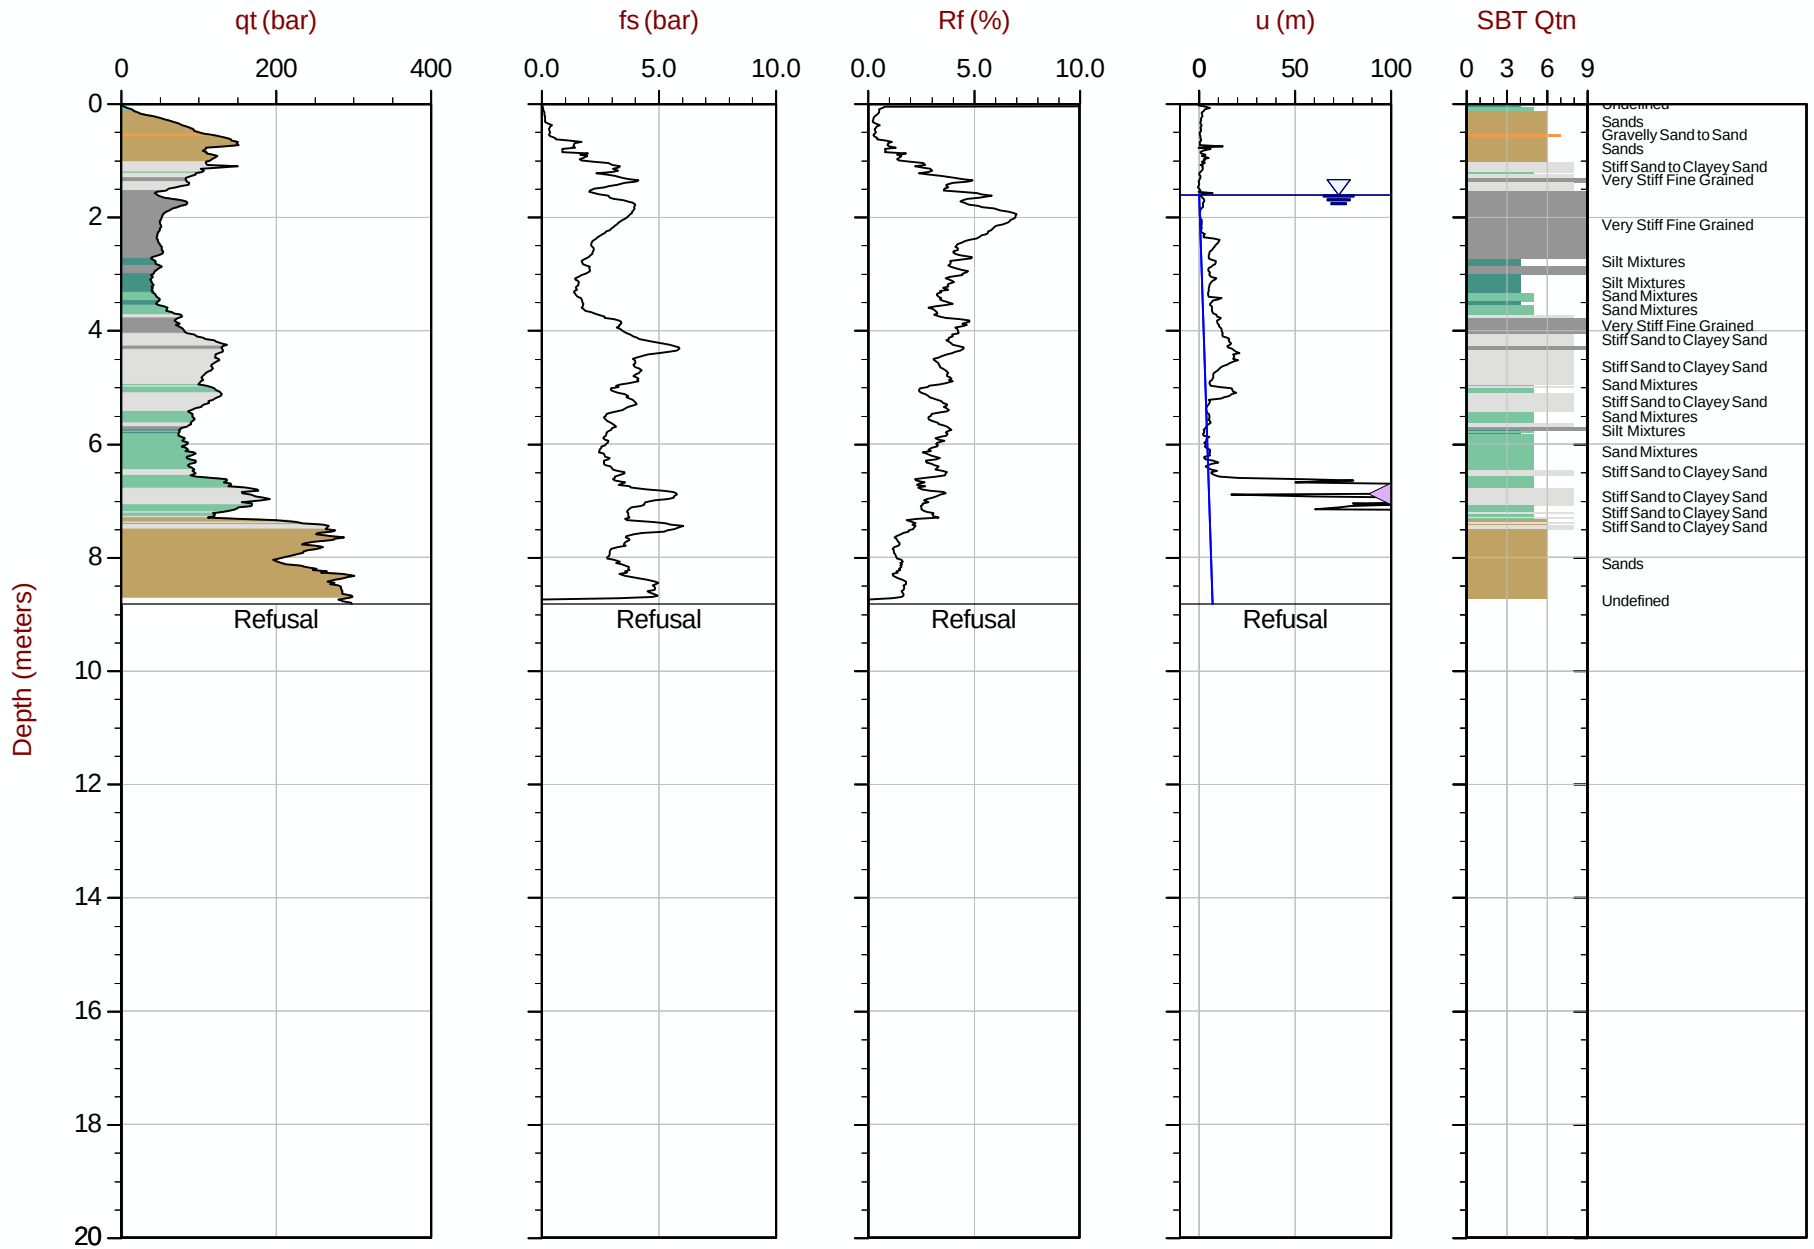

Max Depth: 8.825 m / 28.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT255.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609731m E: 416835m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 13:54
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT256
Cone: 854:T1500F15U35 Area= 15cm2

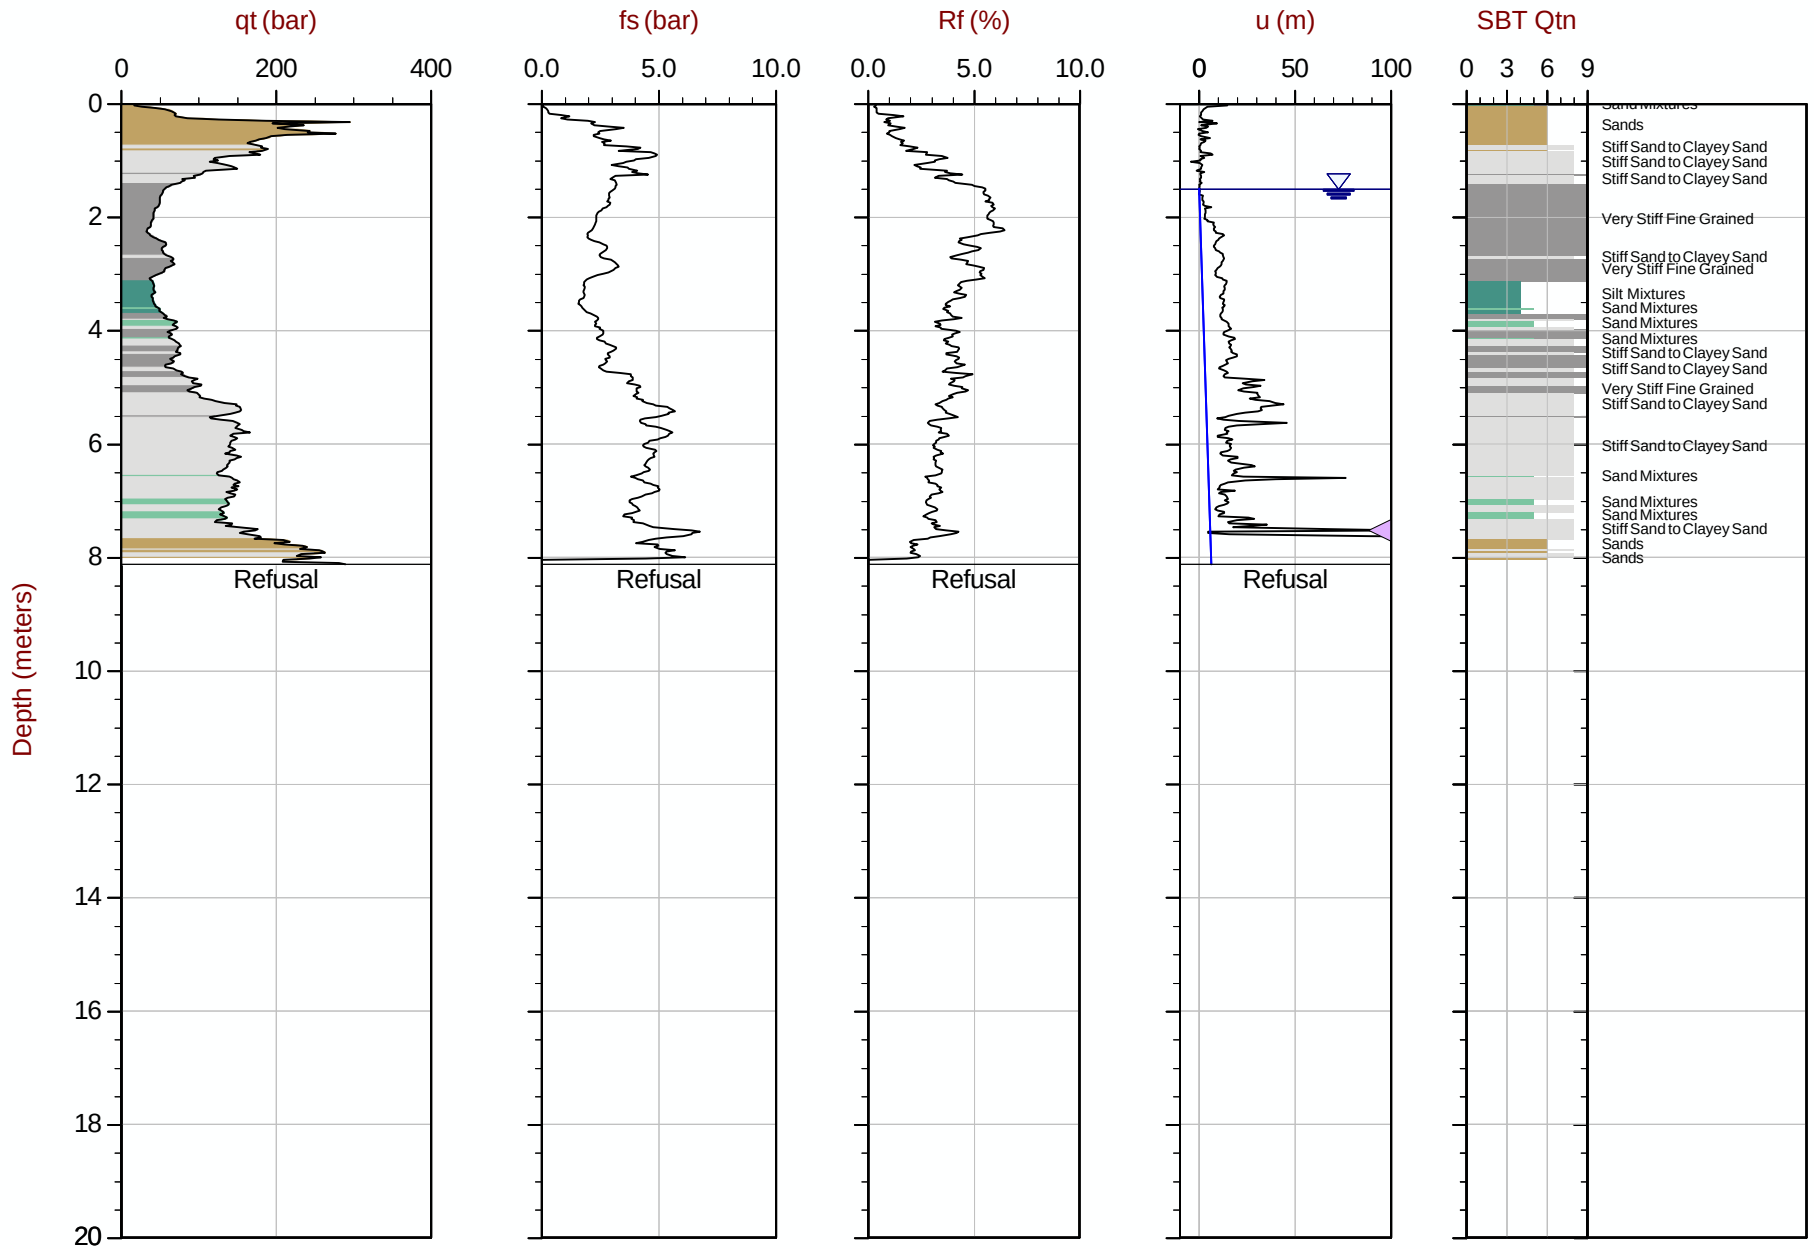

Max Depth: 8.125 m / 26.66 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT256.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609681m E: 416828m Elev: 768.534m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 15:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT257
Cone: 854:T1500F15U35 Area= 15cm2

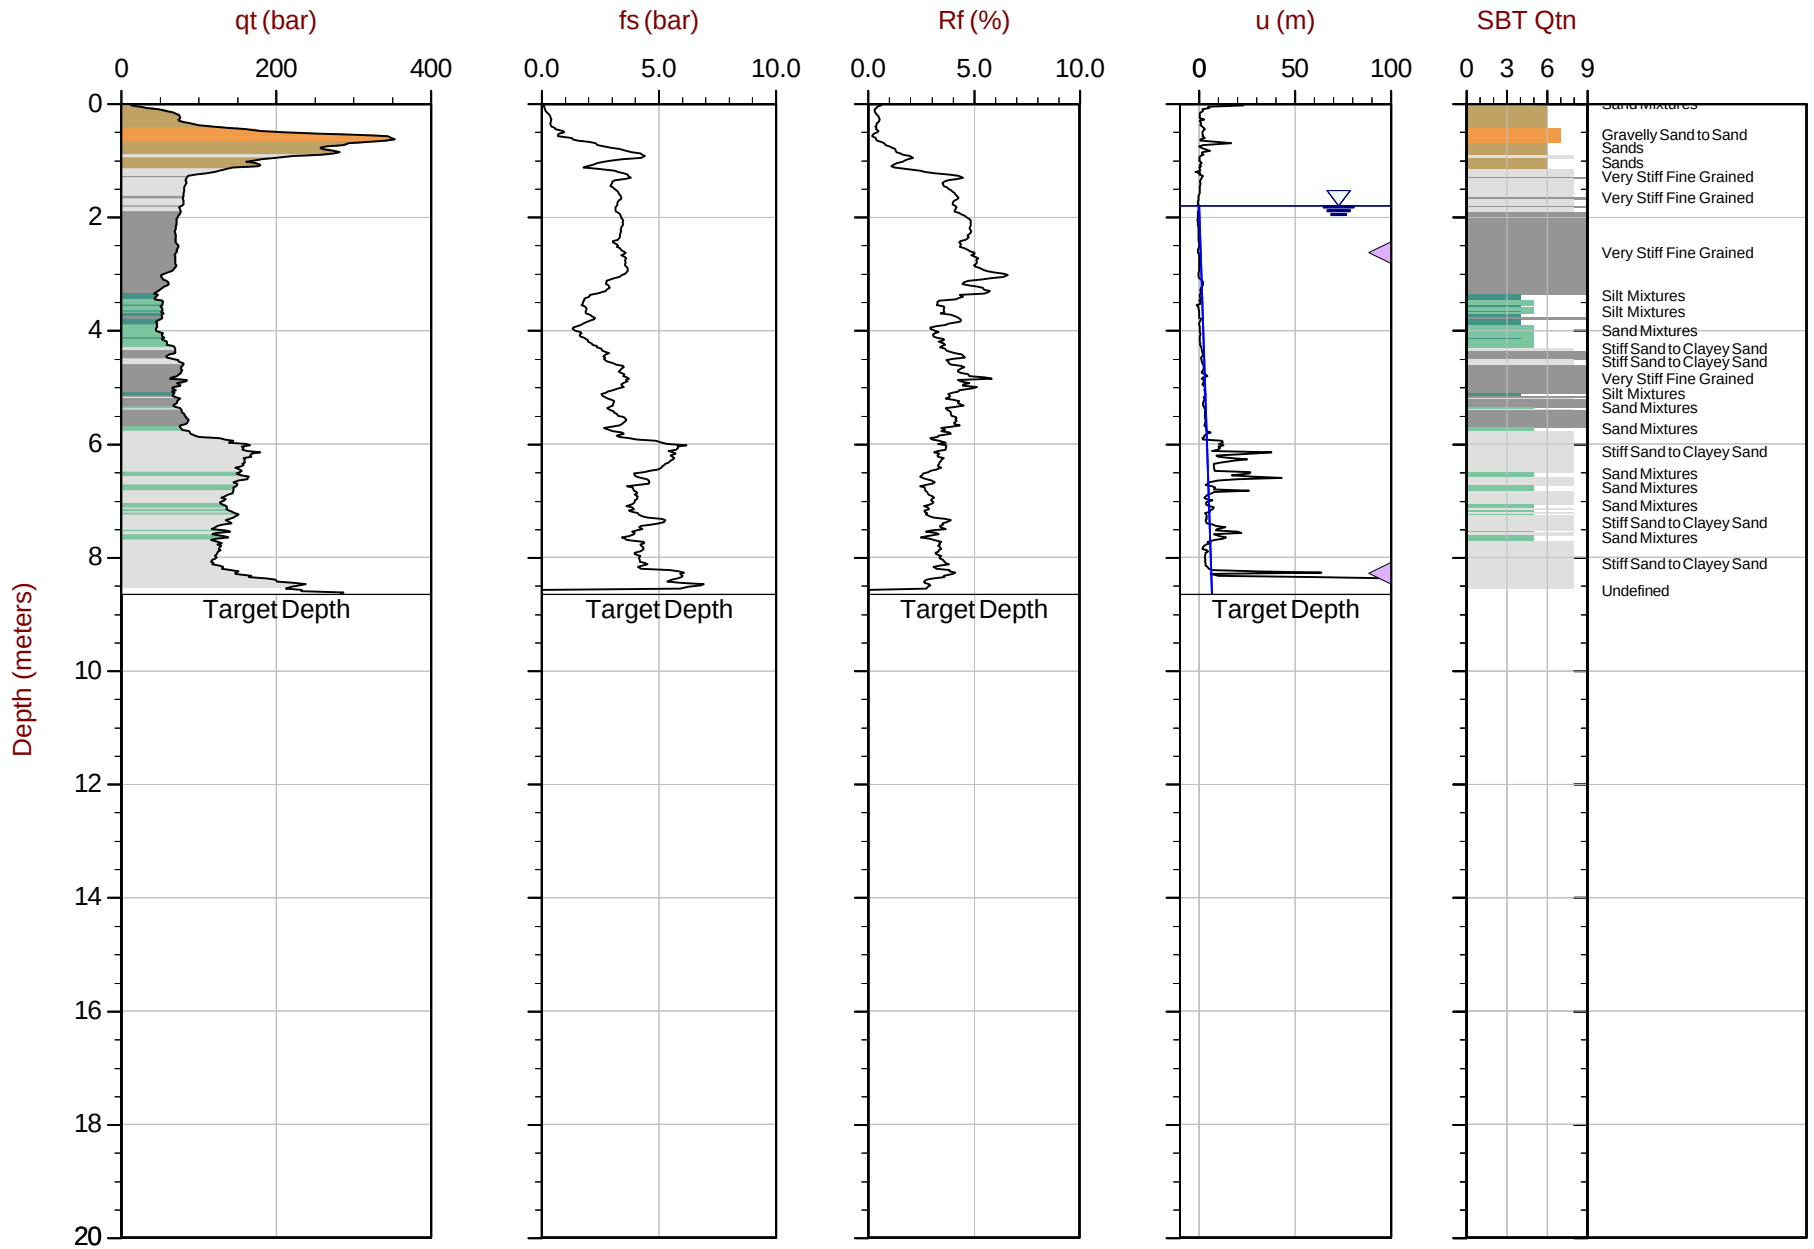

Max Depth: 8.650 m / 28.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT257.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609637m E: 416810m Elev: 768.293m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 16:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT258
Cone: 854:T1500F15U35 Area= 15cm2

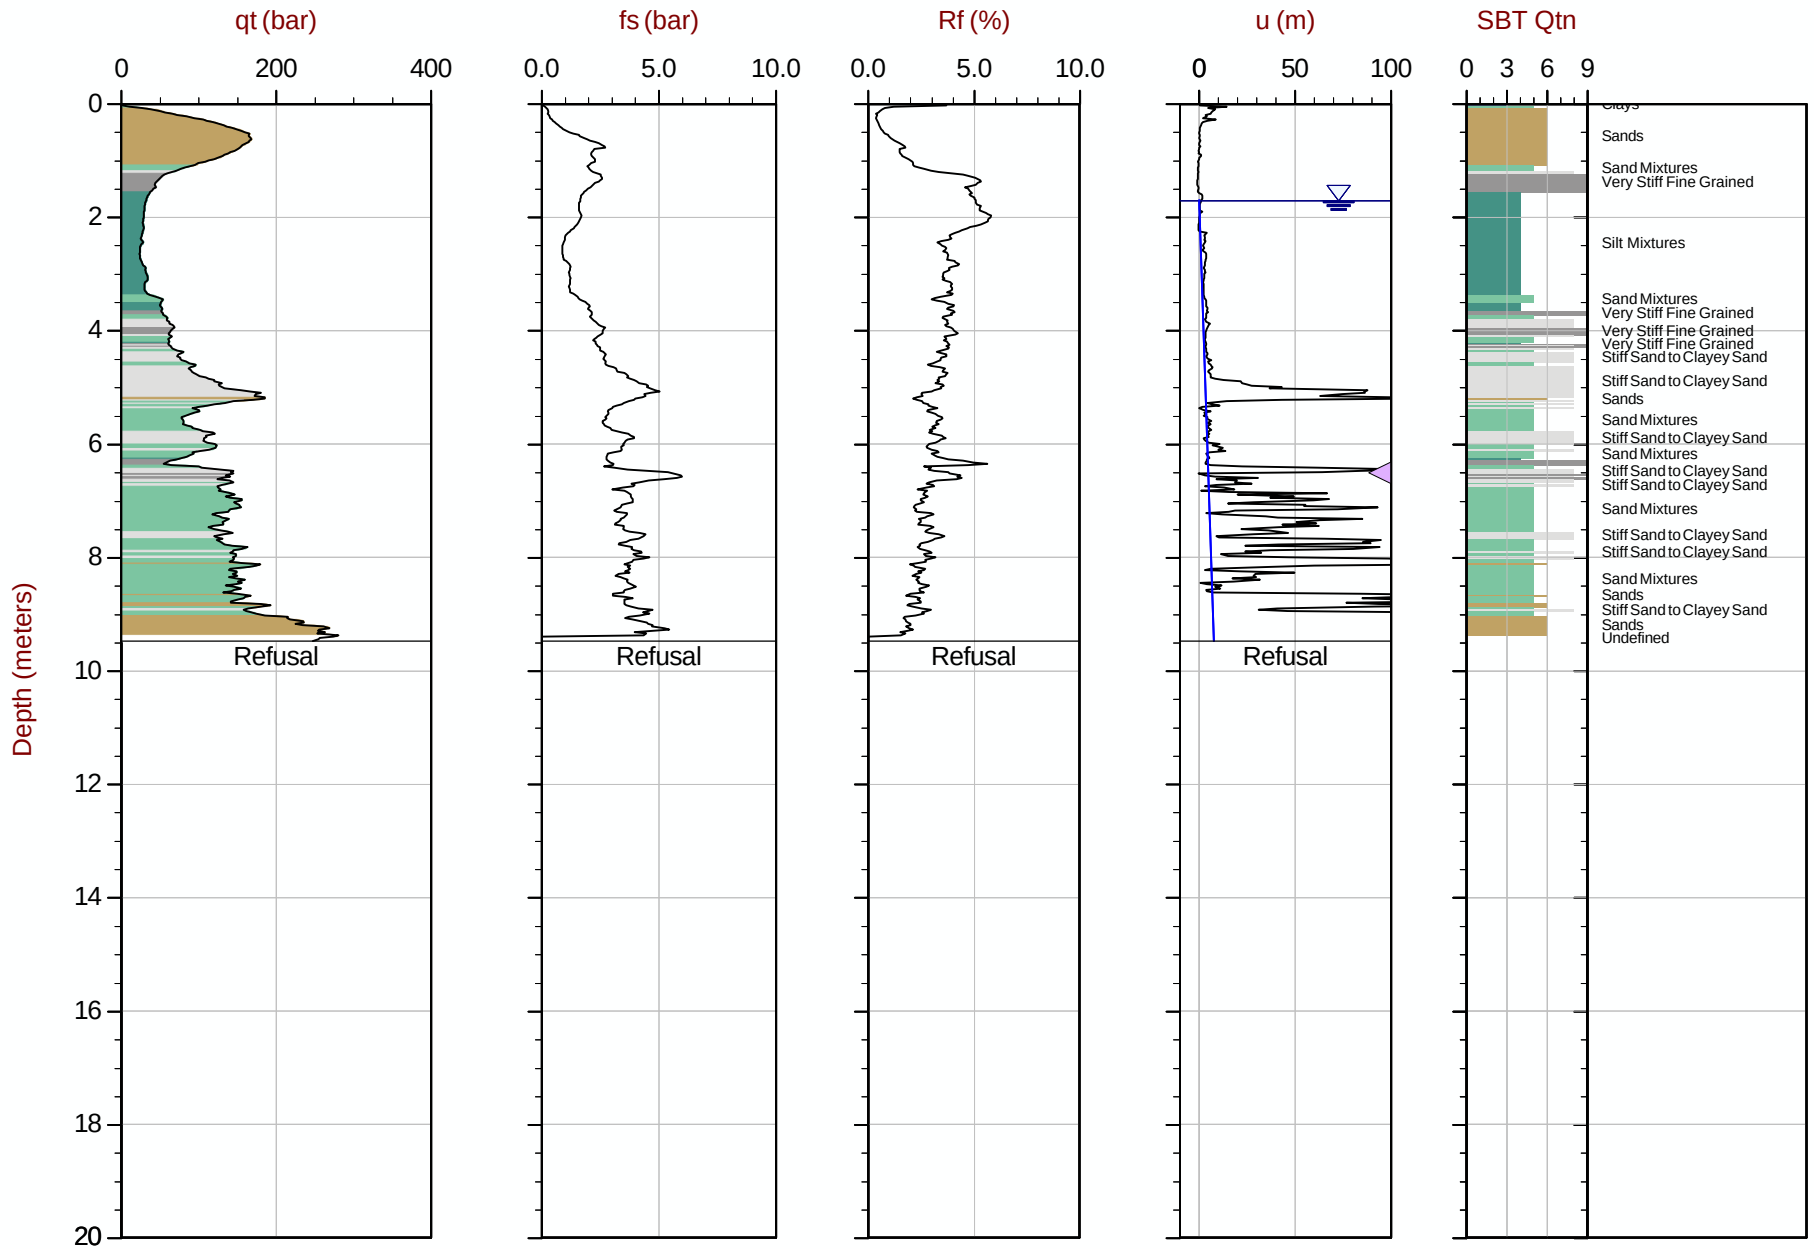

Max Depth: 9.475 m / 31.09 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT258.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609596m E: 416785m Elev: 768.056m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 14:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT259
Cone: 854:T1500F15U35 Area= 15cm2

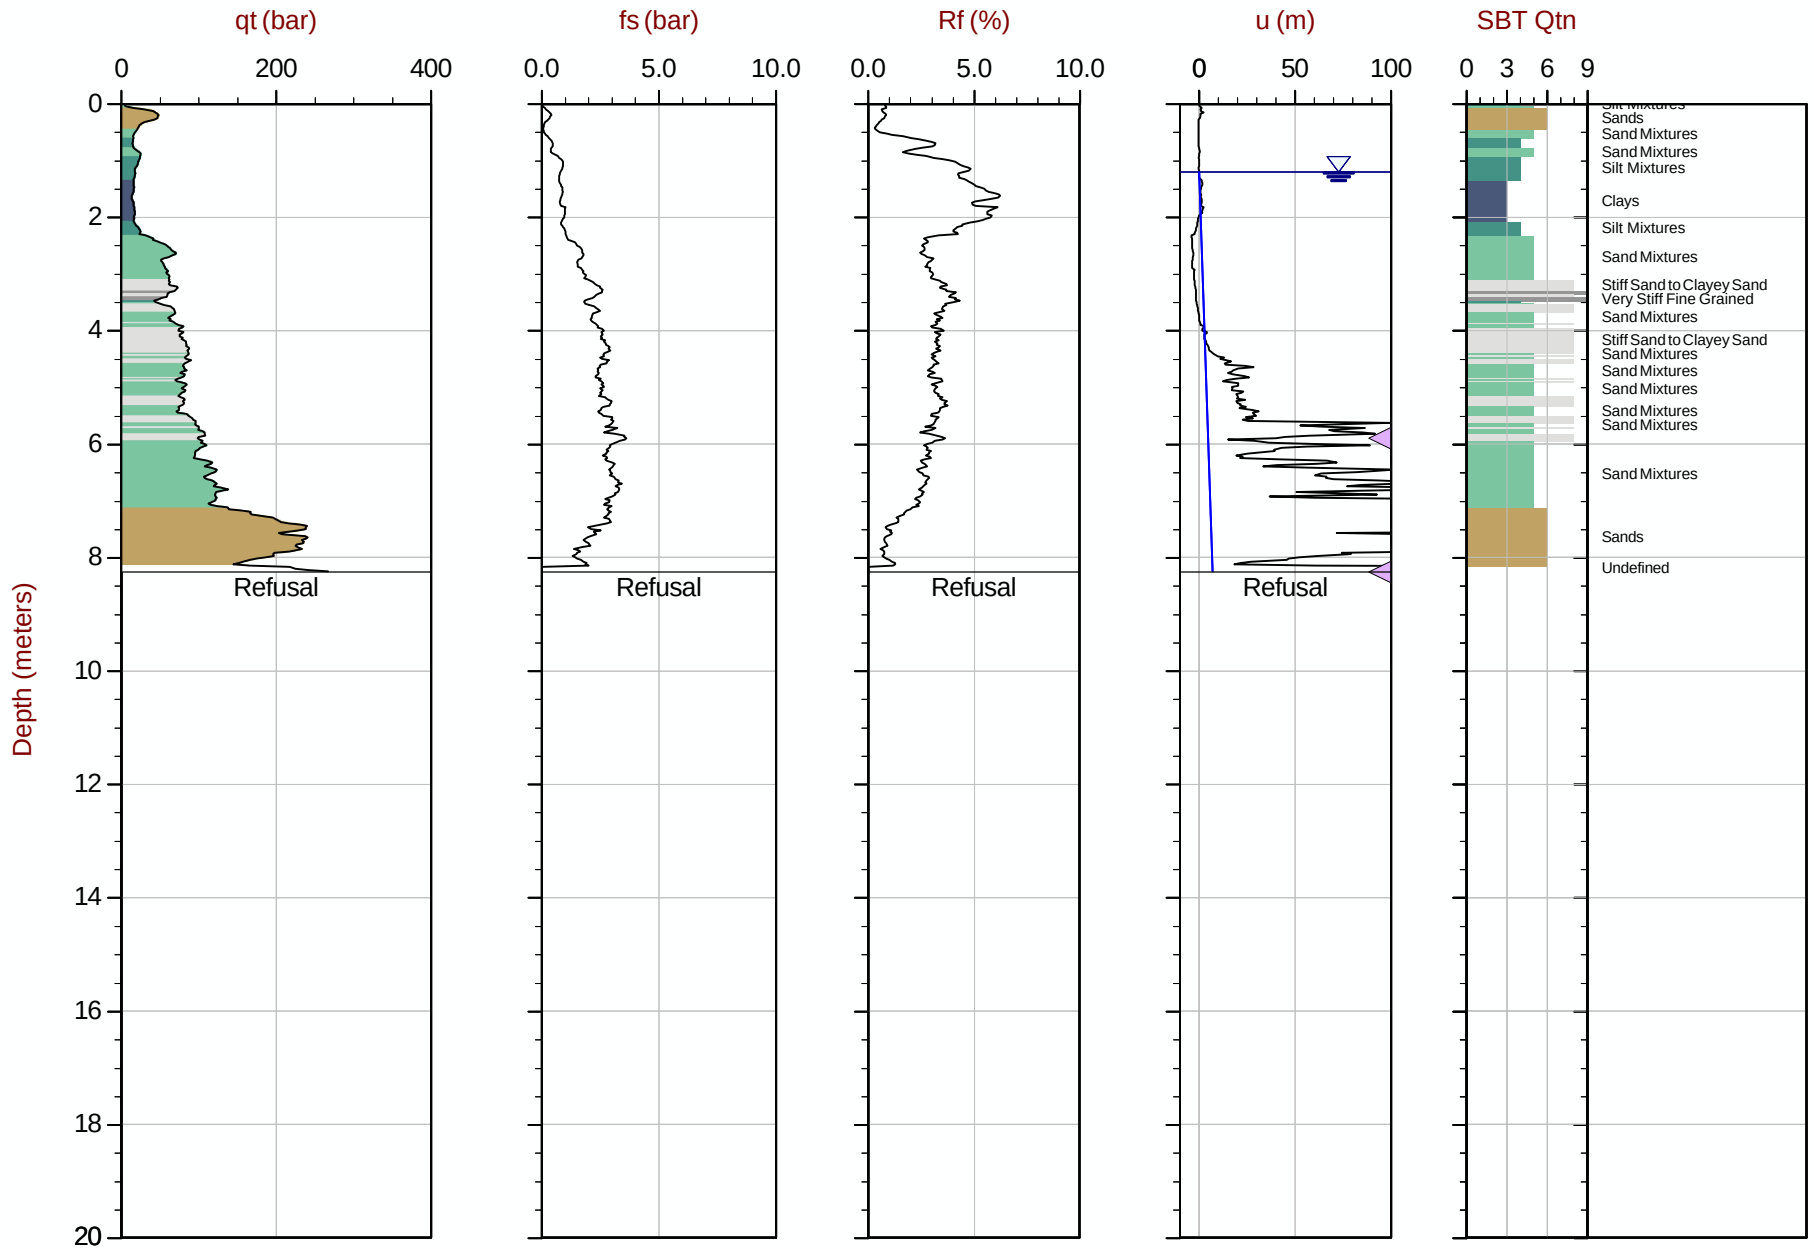

Max Depth: 8.250 m / 27.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT259.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612543m E: 416724m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 17:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT260
Cone: 854:T1500F15U35 Area= 15cm2

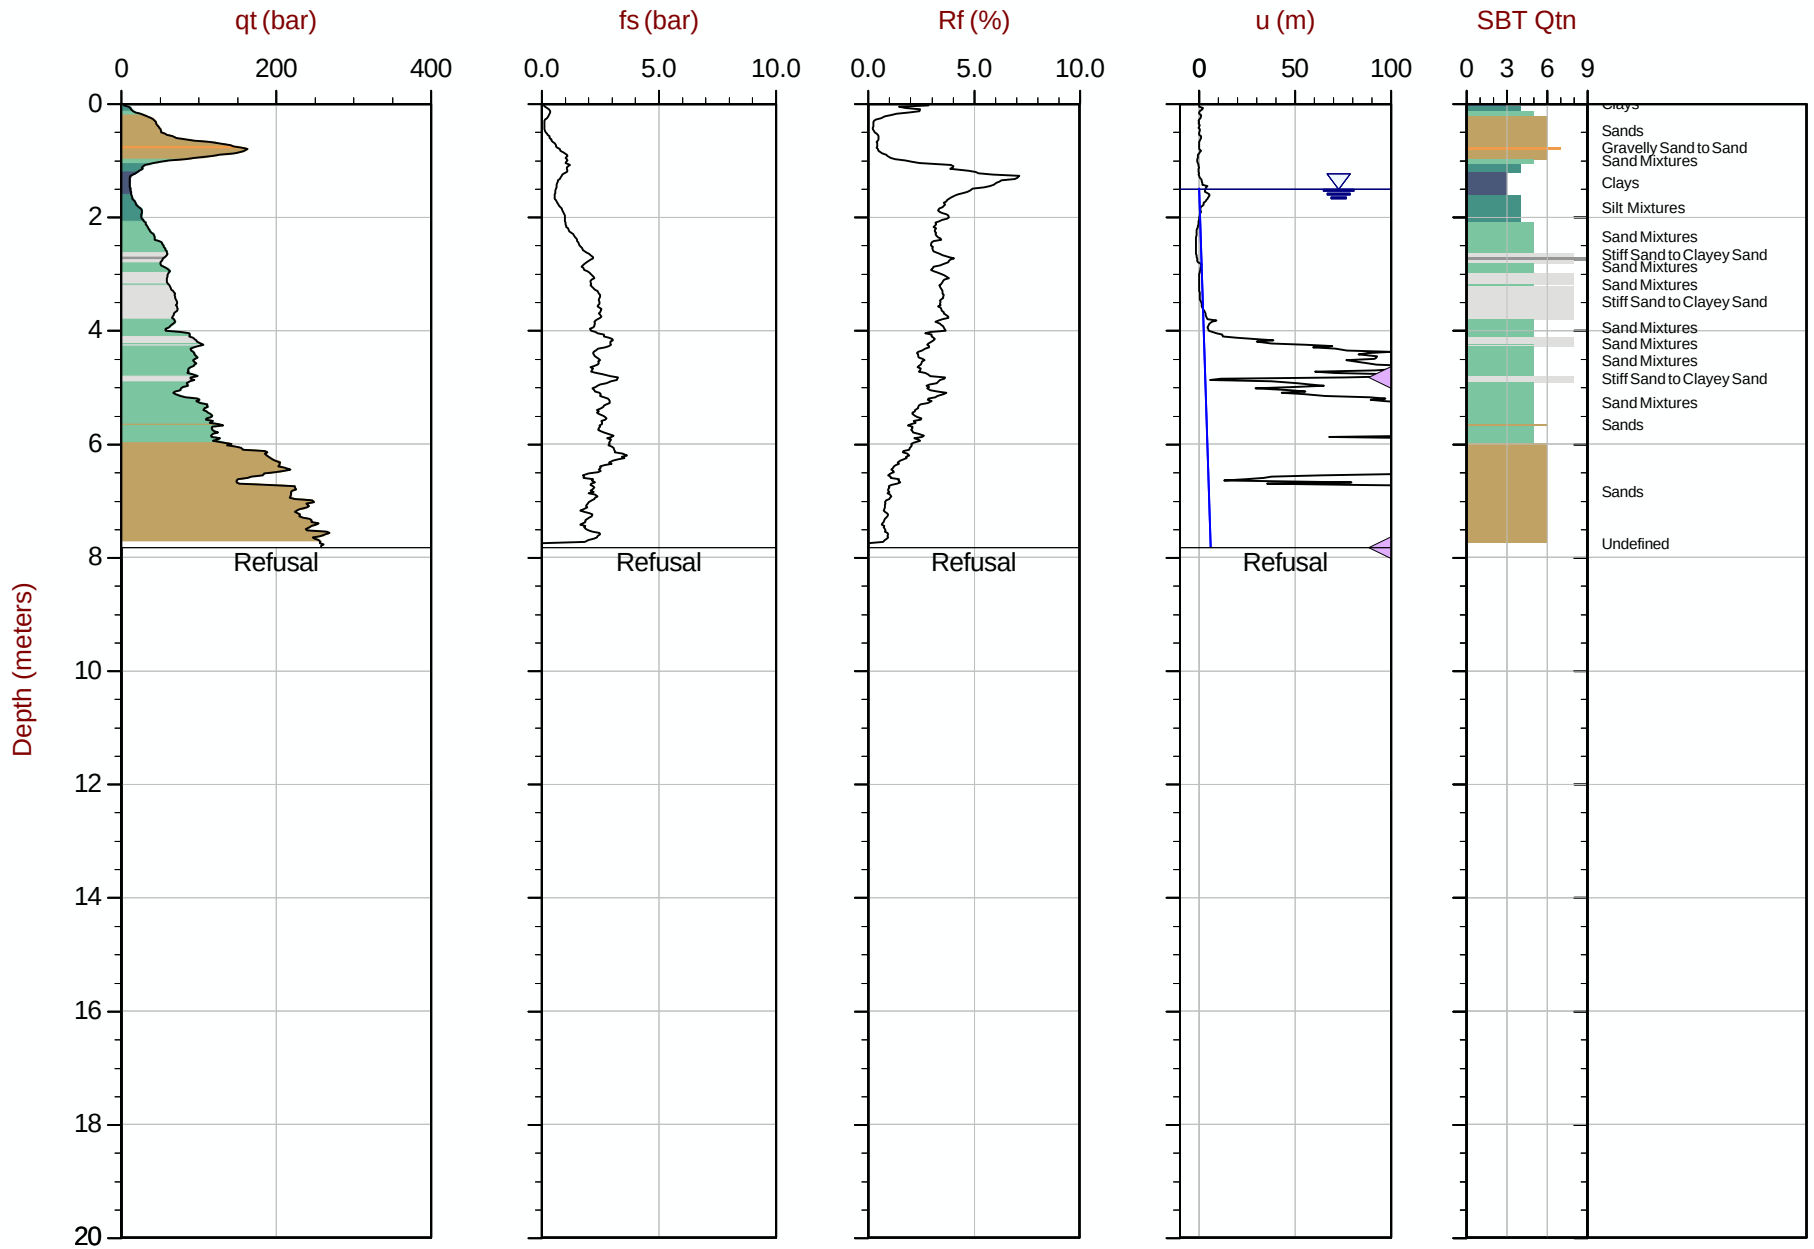

Max Depth: 7.825 m / 25.67 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT260.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612481m E: 416823m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 13:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT261
Cone: 821:T1000F10U35 Area= 15cm2

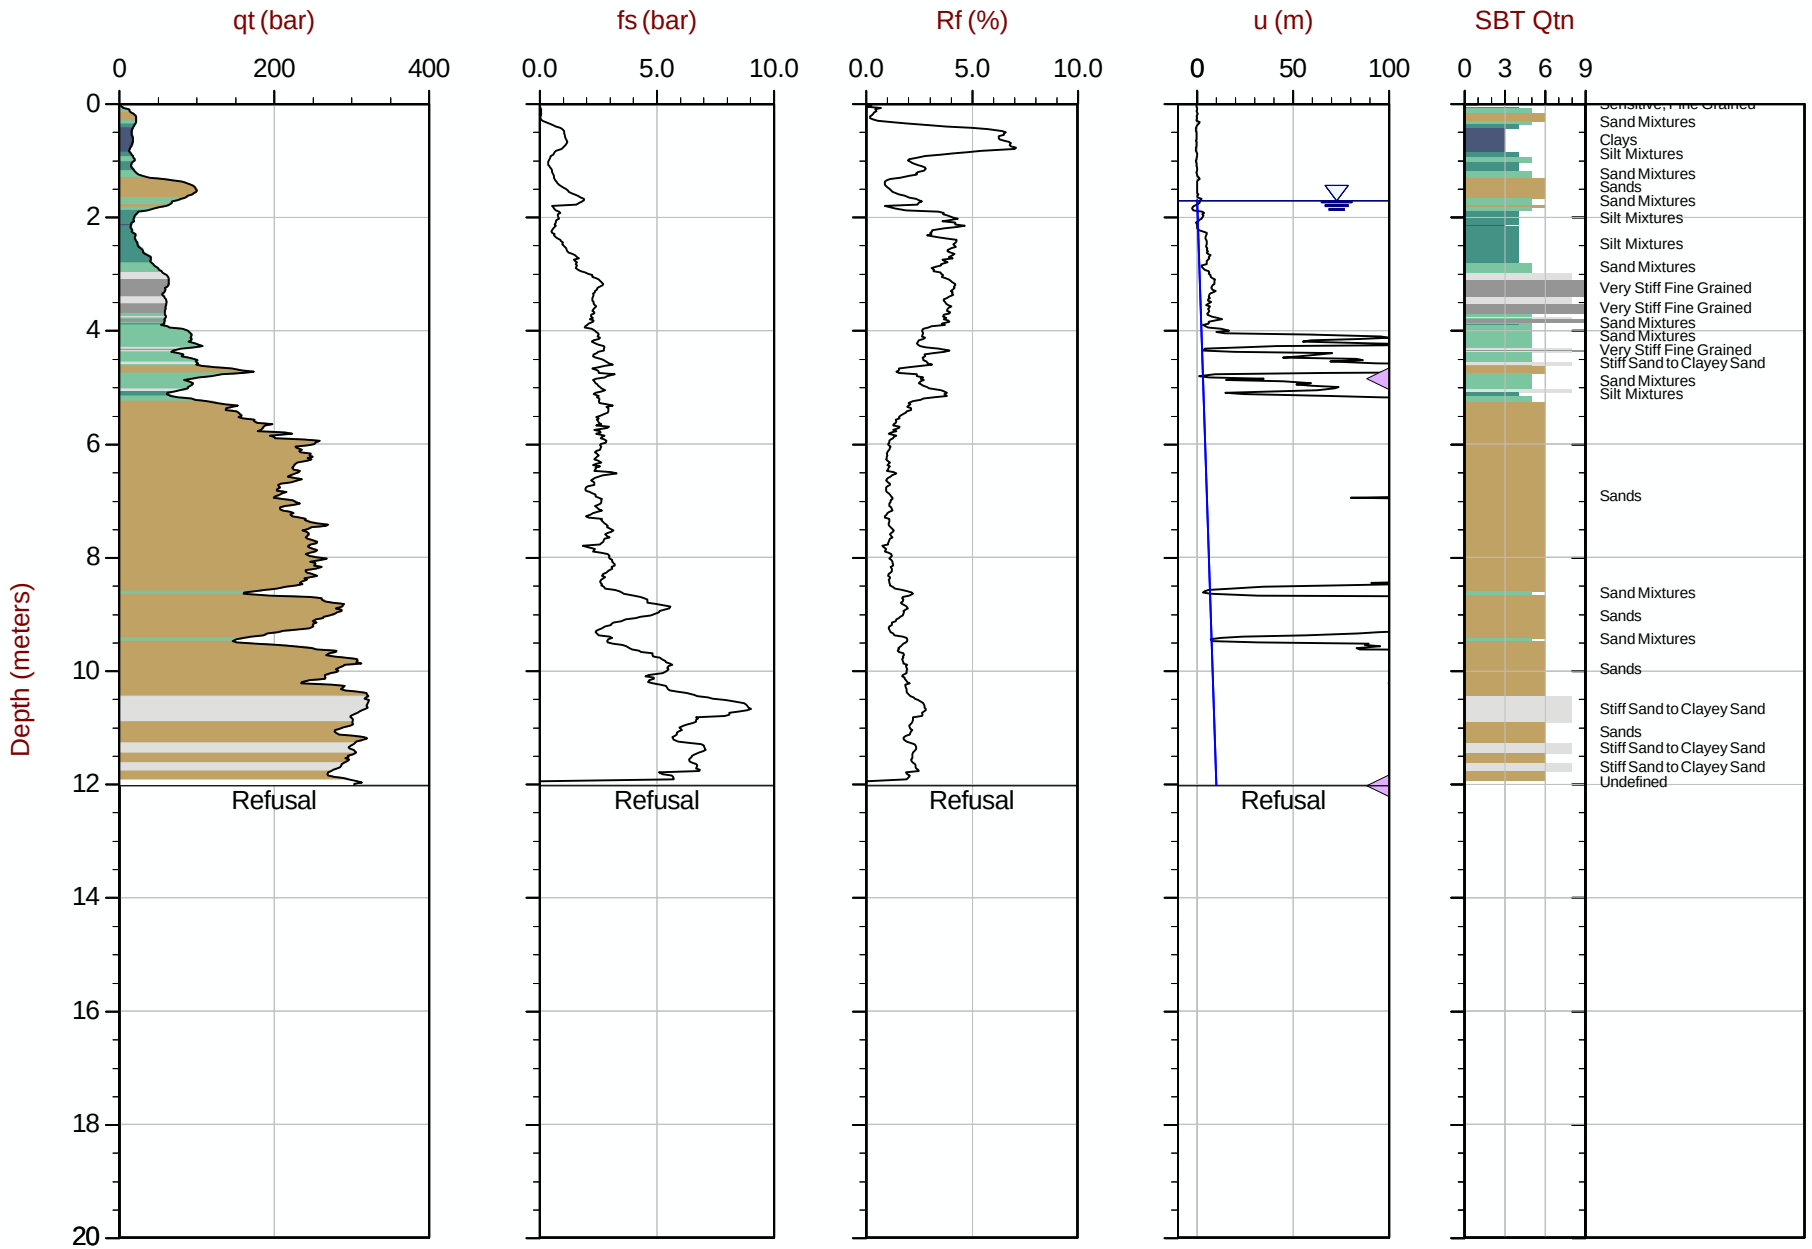

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT261.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612389m E: 416896m Elev: 767.458m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 12:35
Site: Brooks, Alberta

Sounding: RCPT22-22CPT262
Cone: 821:T1000F10U35 Area= 15cm2

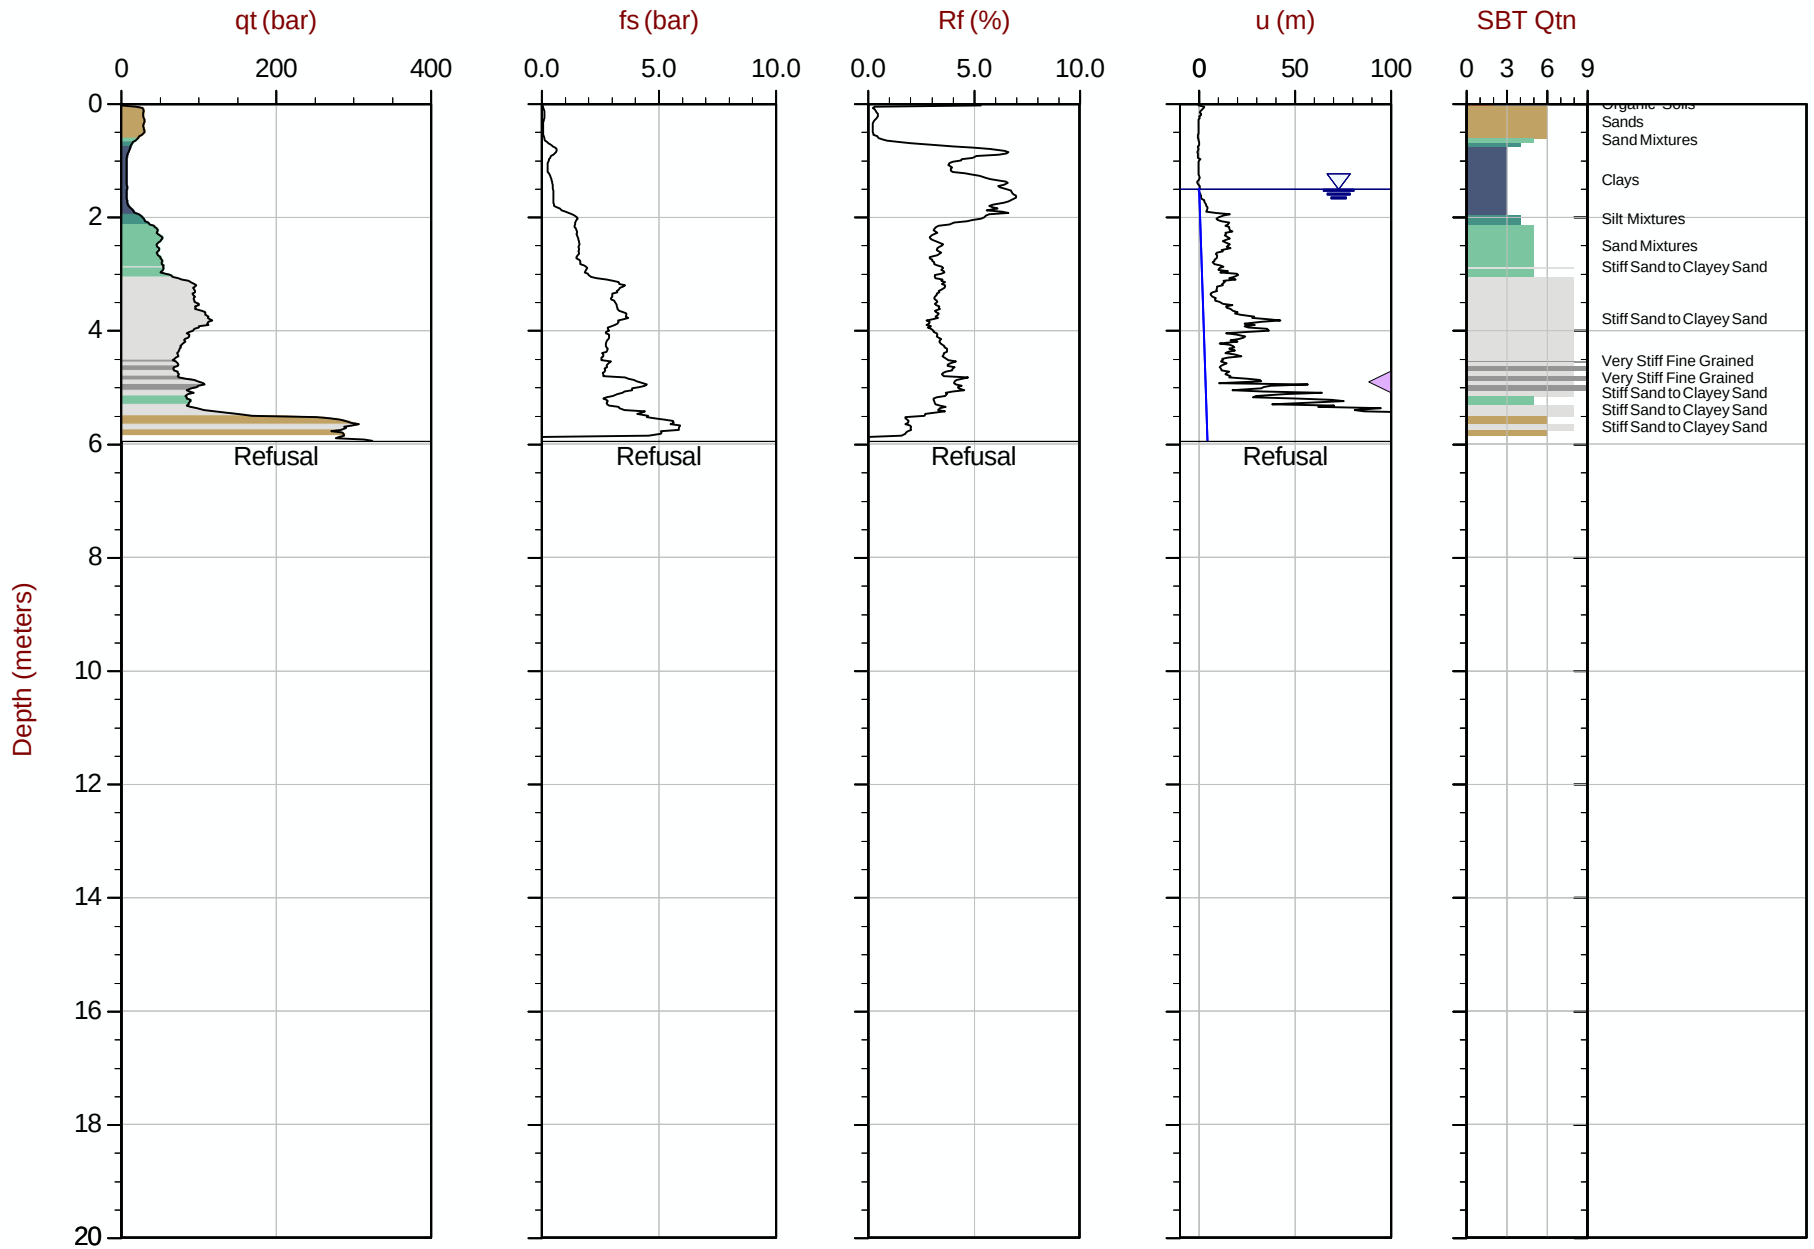

Max Depth: 5.950 m / 19.52 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT262.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612278m E: 416934m Elev: 767.455m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 11:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT263
Cone: 821:T1000F10U35 Area= 15cm2

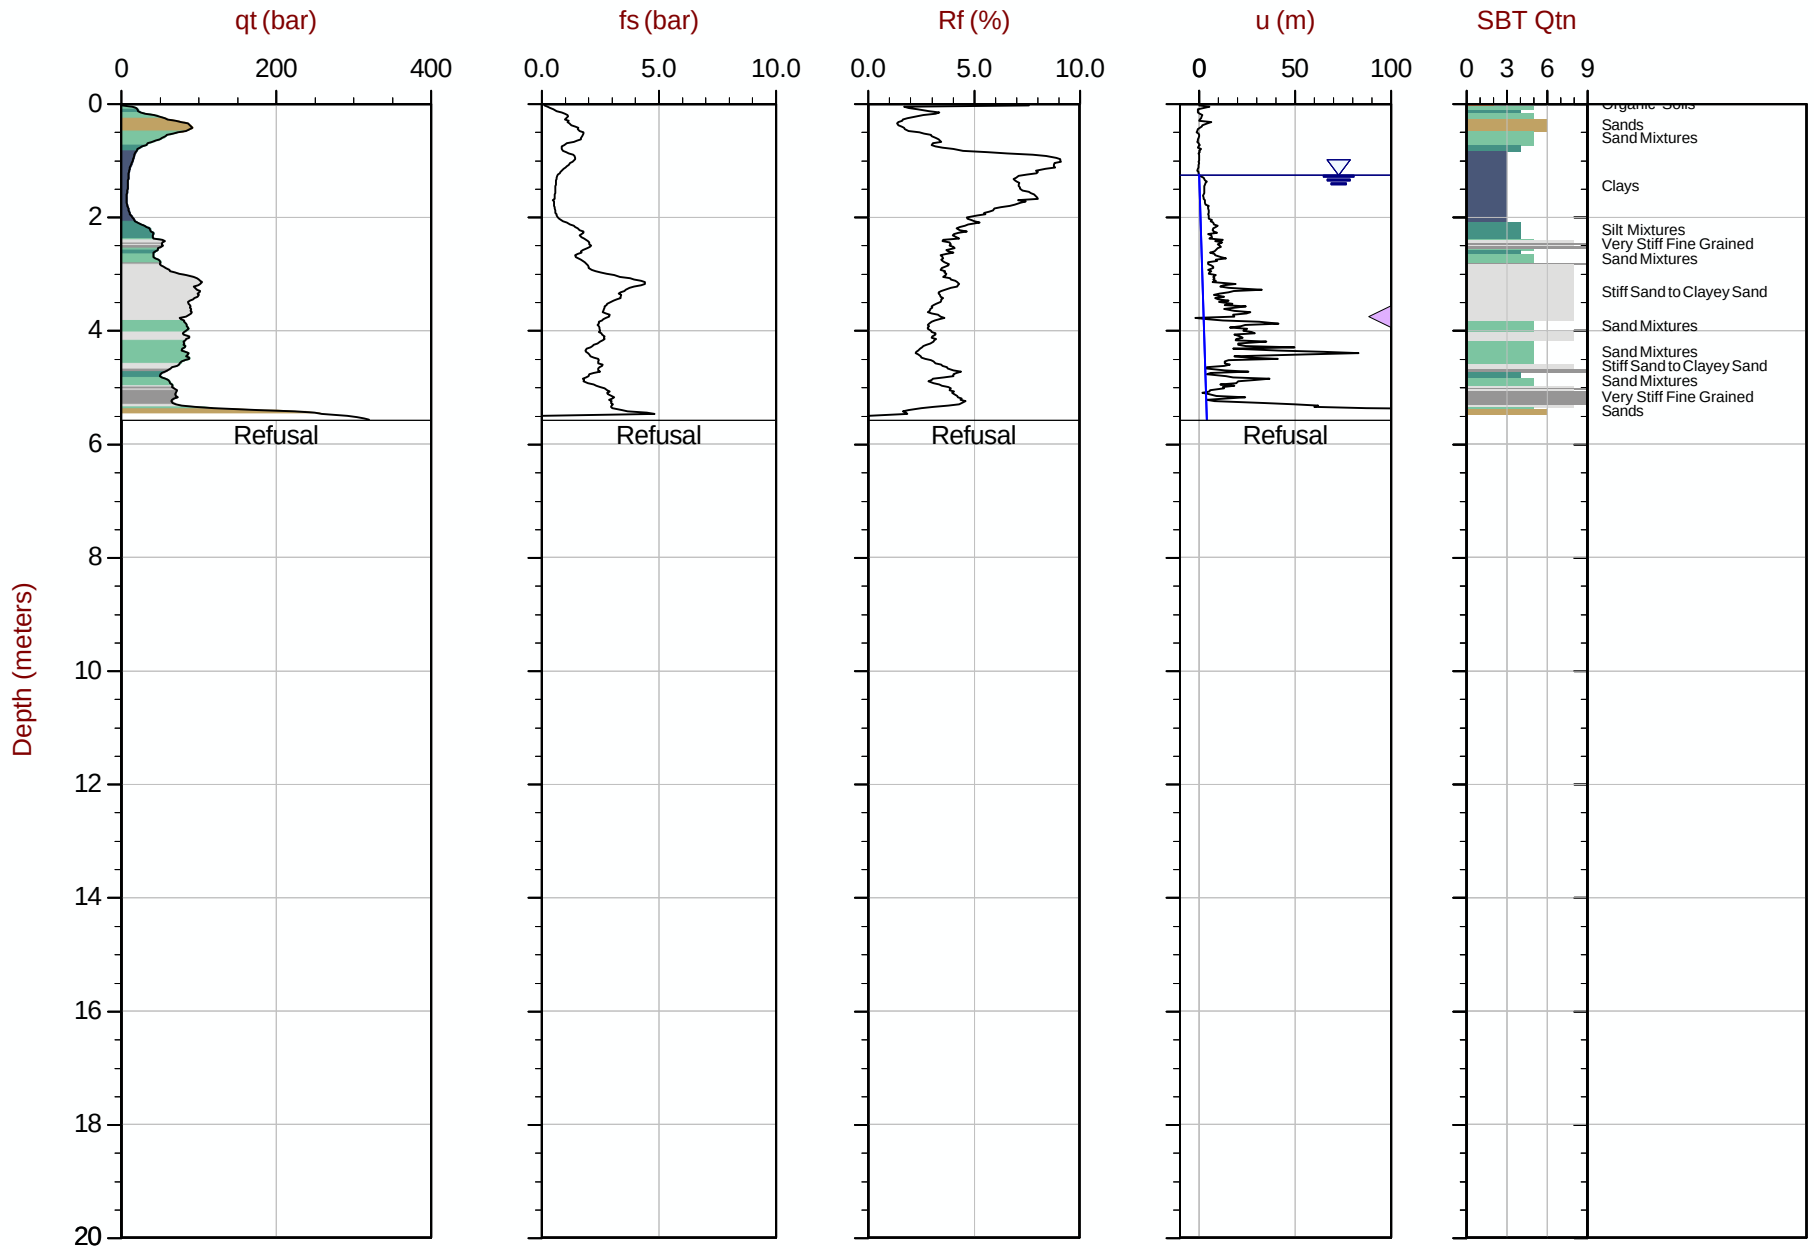

Max Depth: 5.575 m / 18.29 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT263.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612168m E: 416938m Elev: 767.248m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 10:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT264
Cone: 821:T1000F10U35 Area= 15cm2

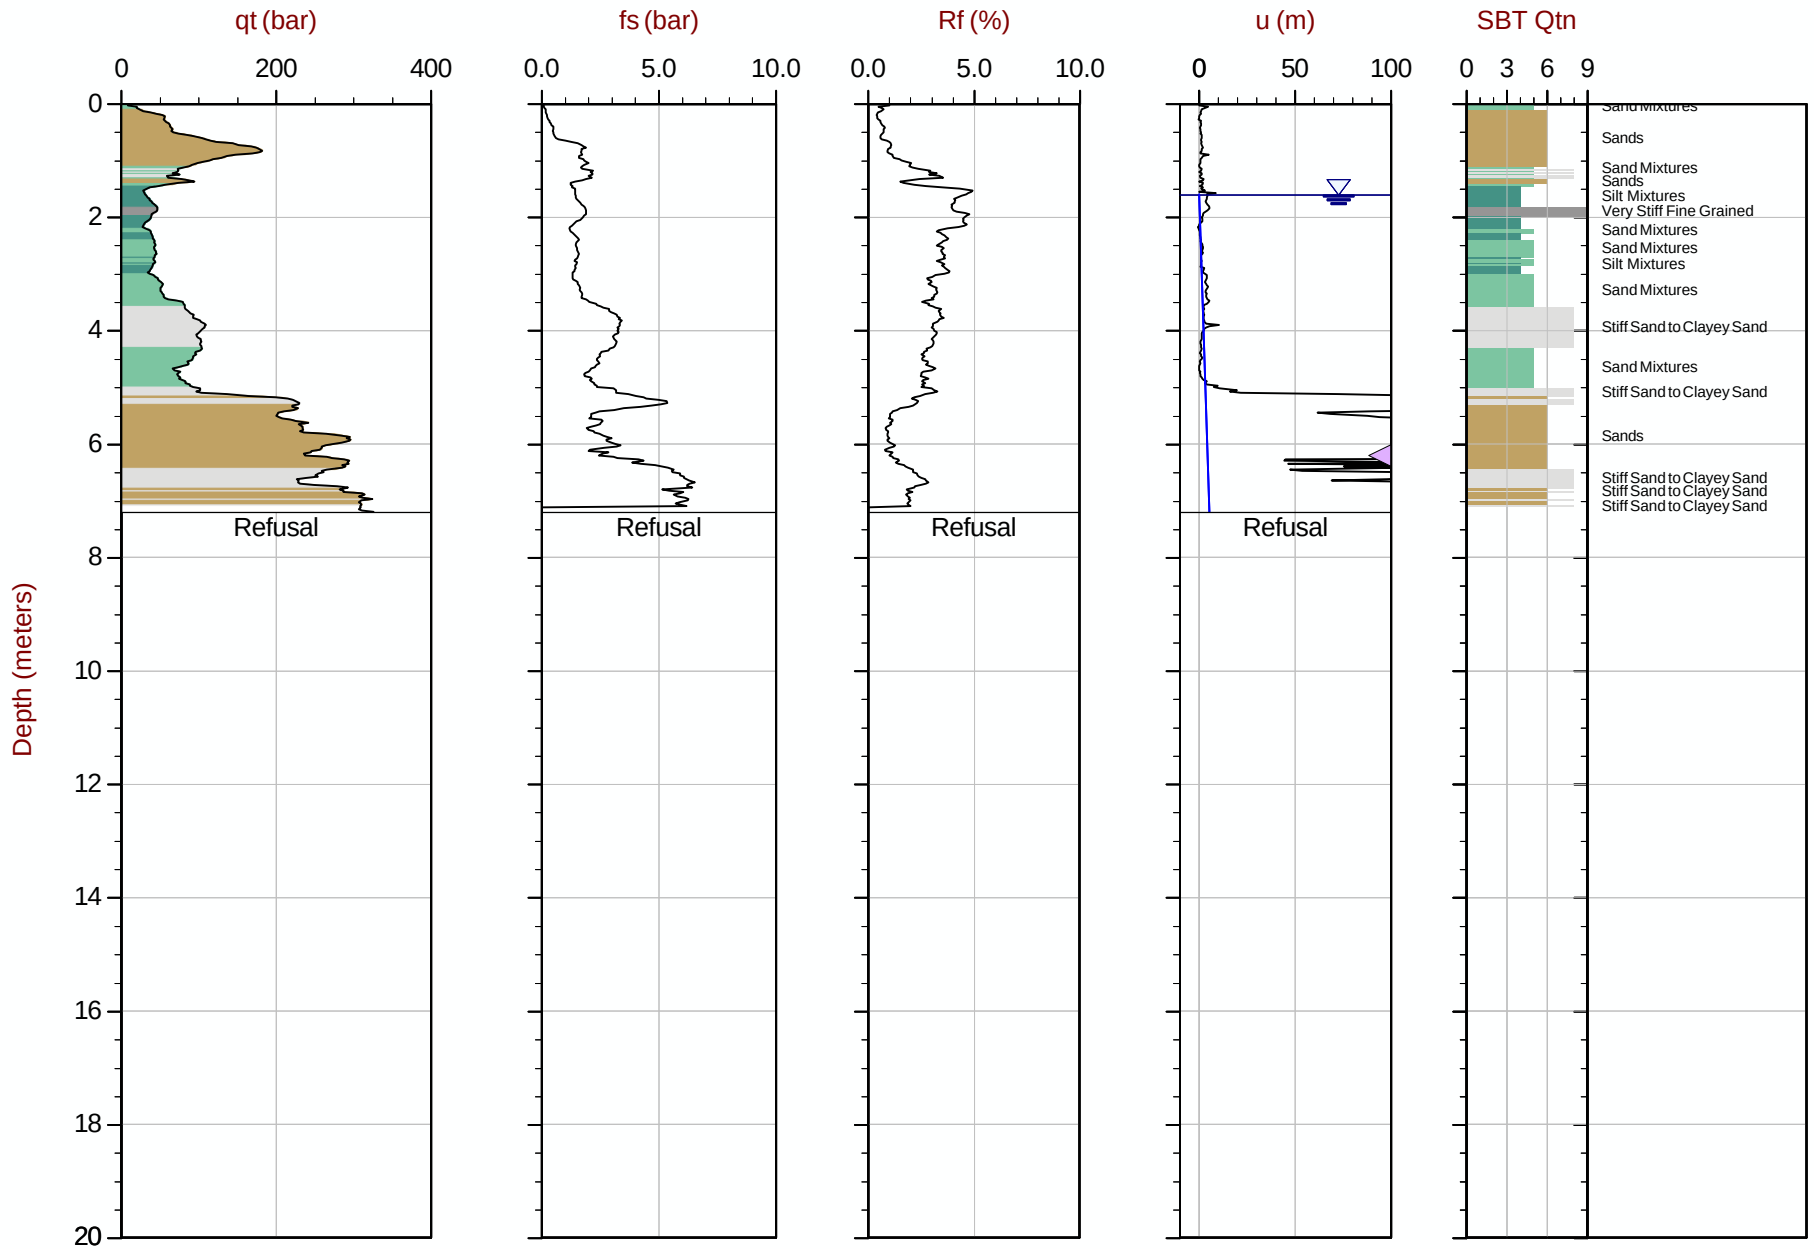

Max Depth: 7.200 m / 23.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT264.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612068m E: 416934m Elev: 767.730m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 10:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT265
Cone: 821:T1000F10U35 Area= 15cm2

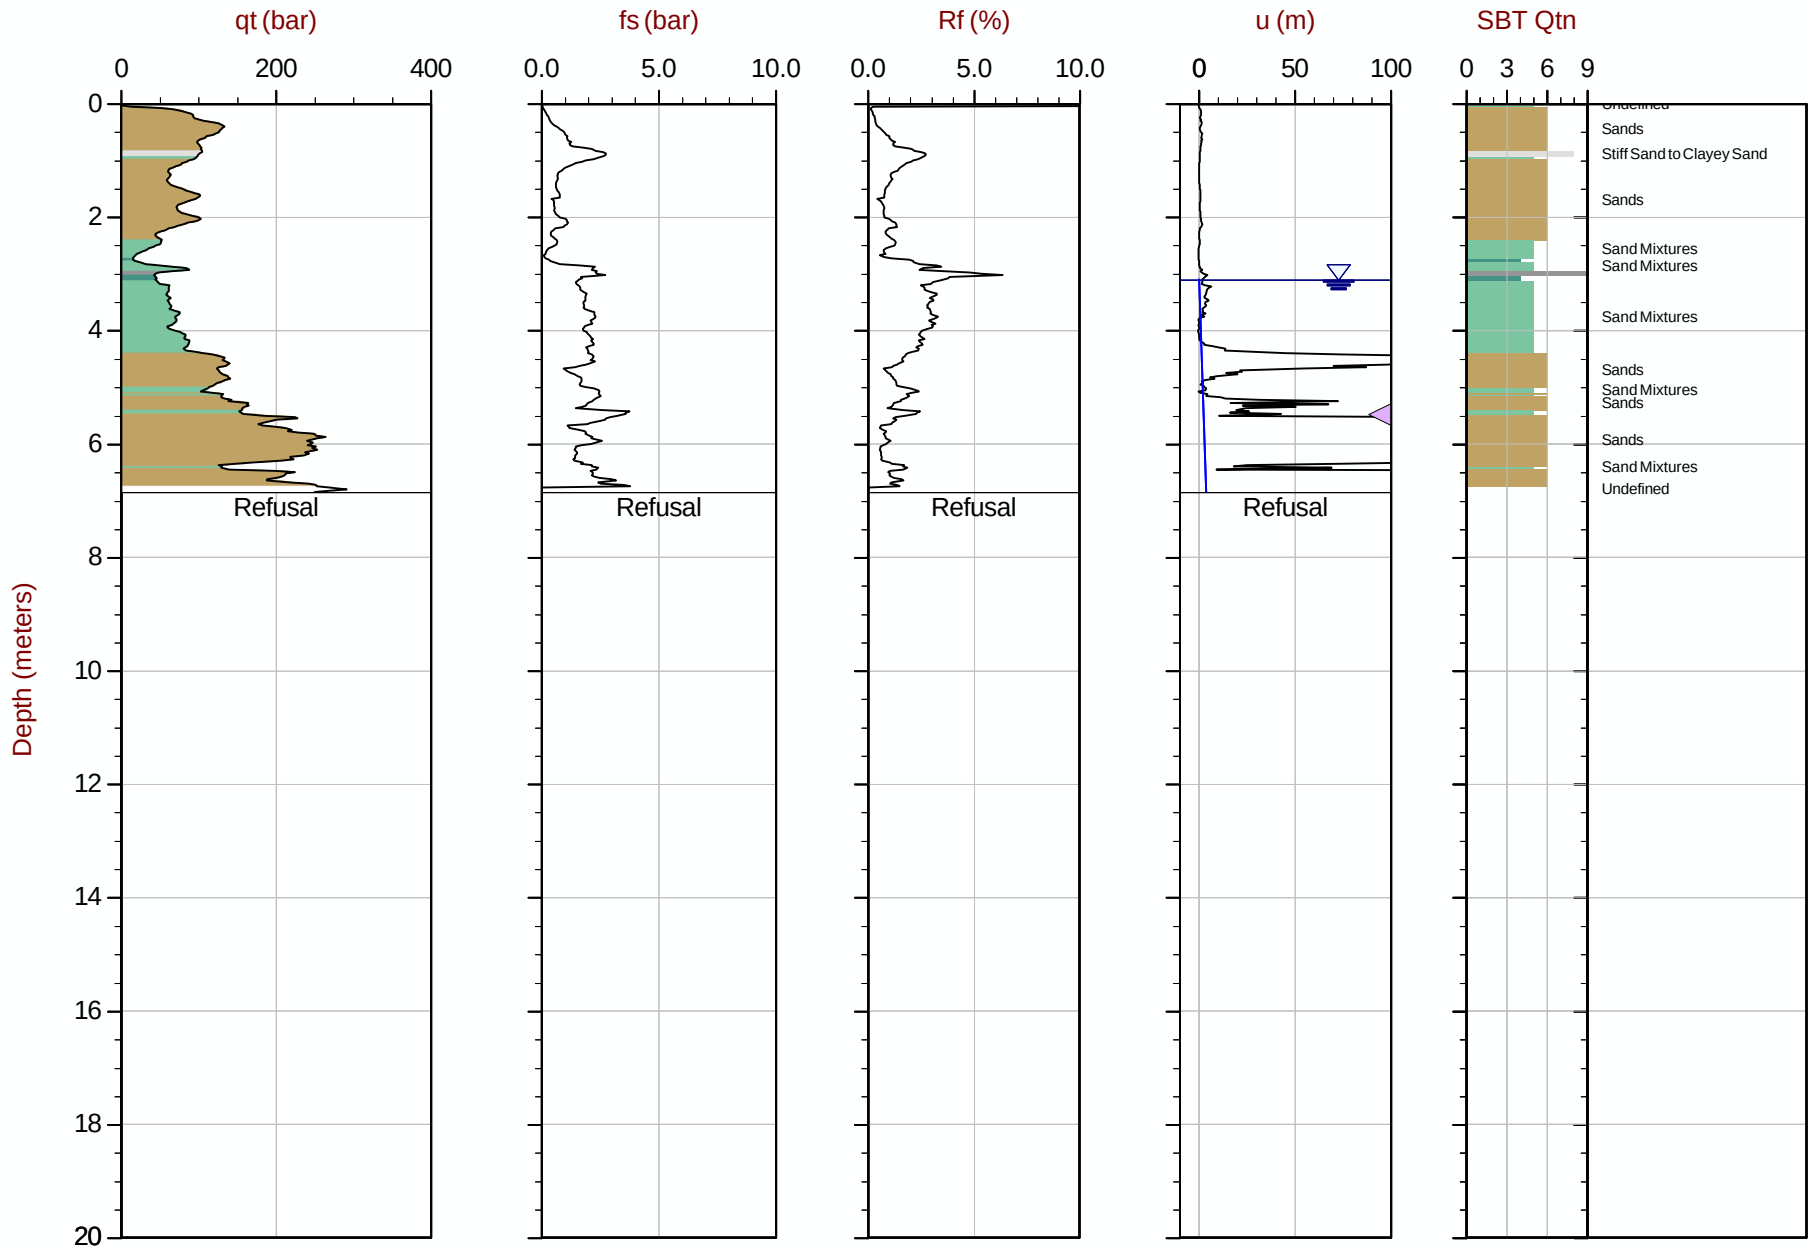

Max Depth: 6.850 m / 22.47 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT265.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611968m E: 416923m Elev: 768.596m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 11:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT266
Cone: 821:T1000F10U35 Area= 15cm2

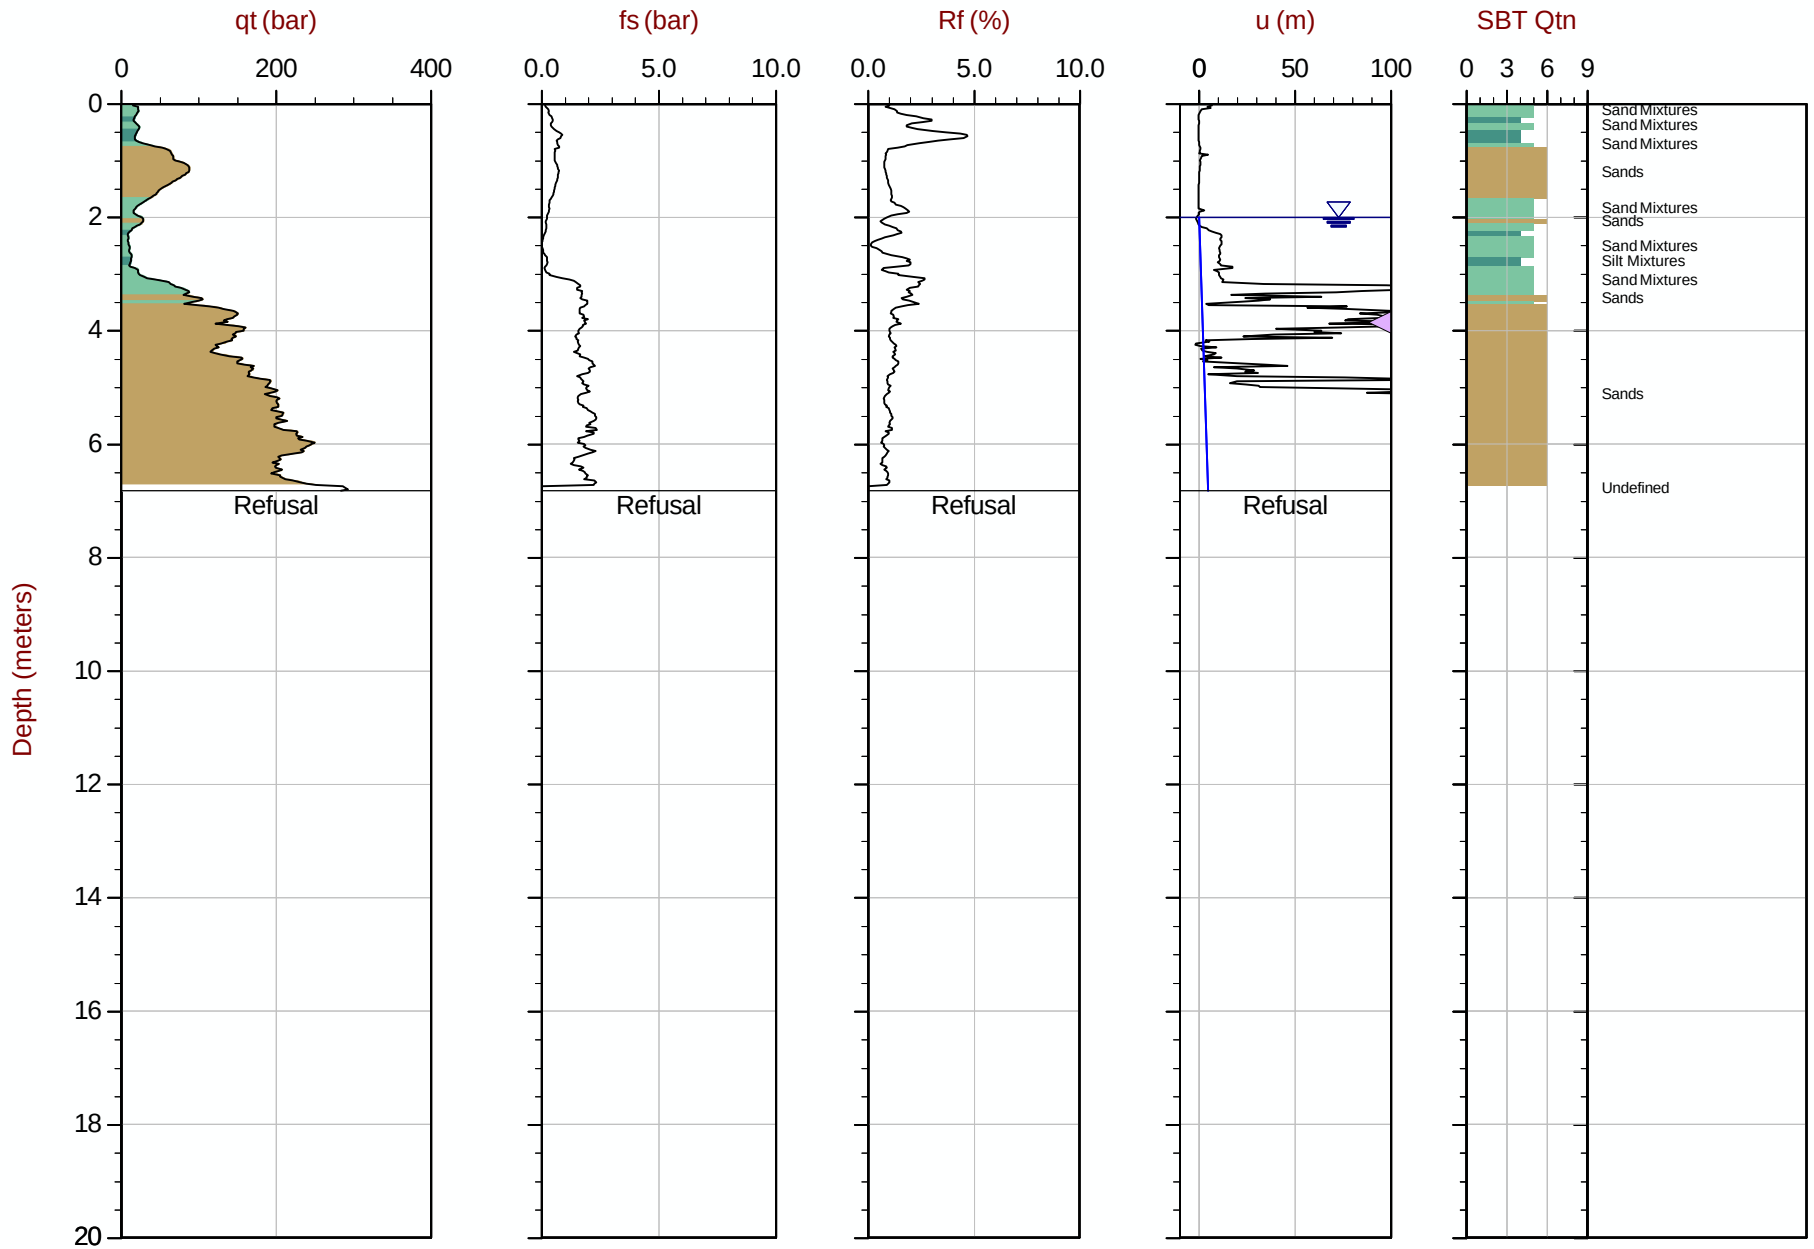

Max Depth: 6.825 m / 22.39 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT266.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611868m E: 416928m Elev: 767.825m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 12:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT267
Cone: 821:T1000F10U35 Area= 15cm2

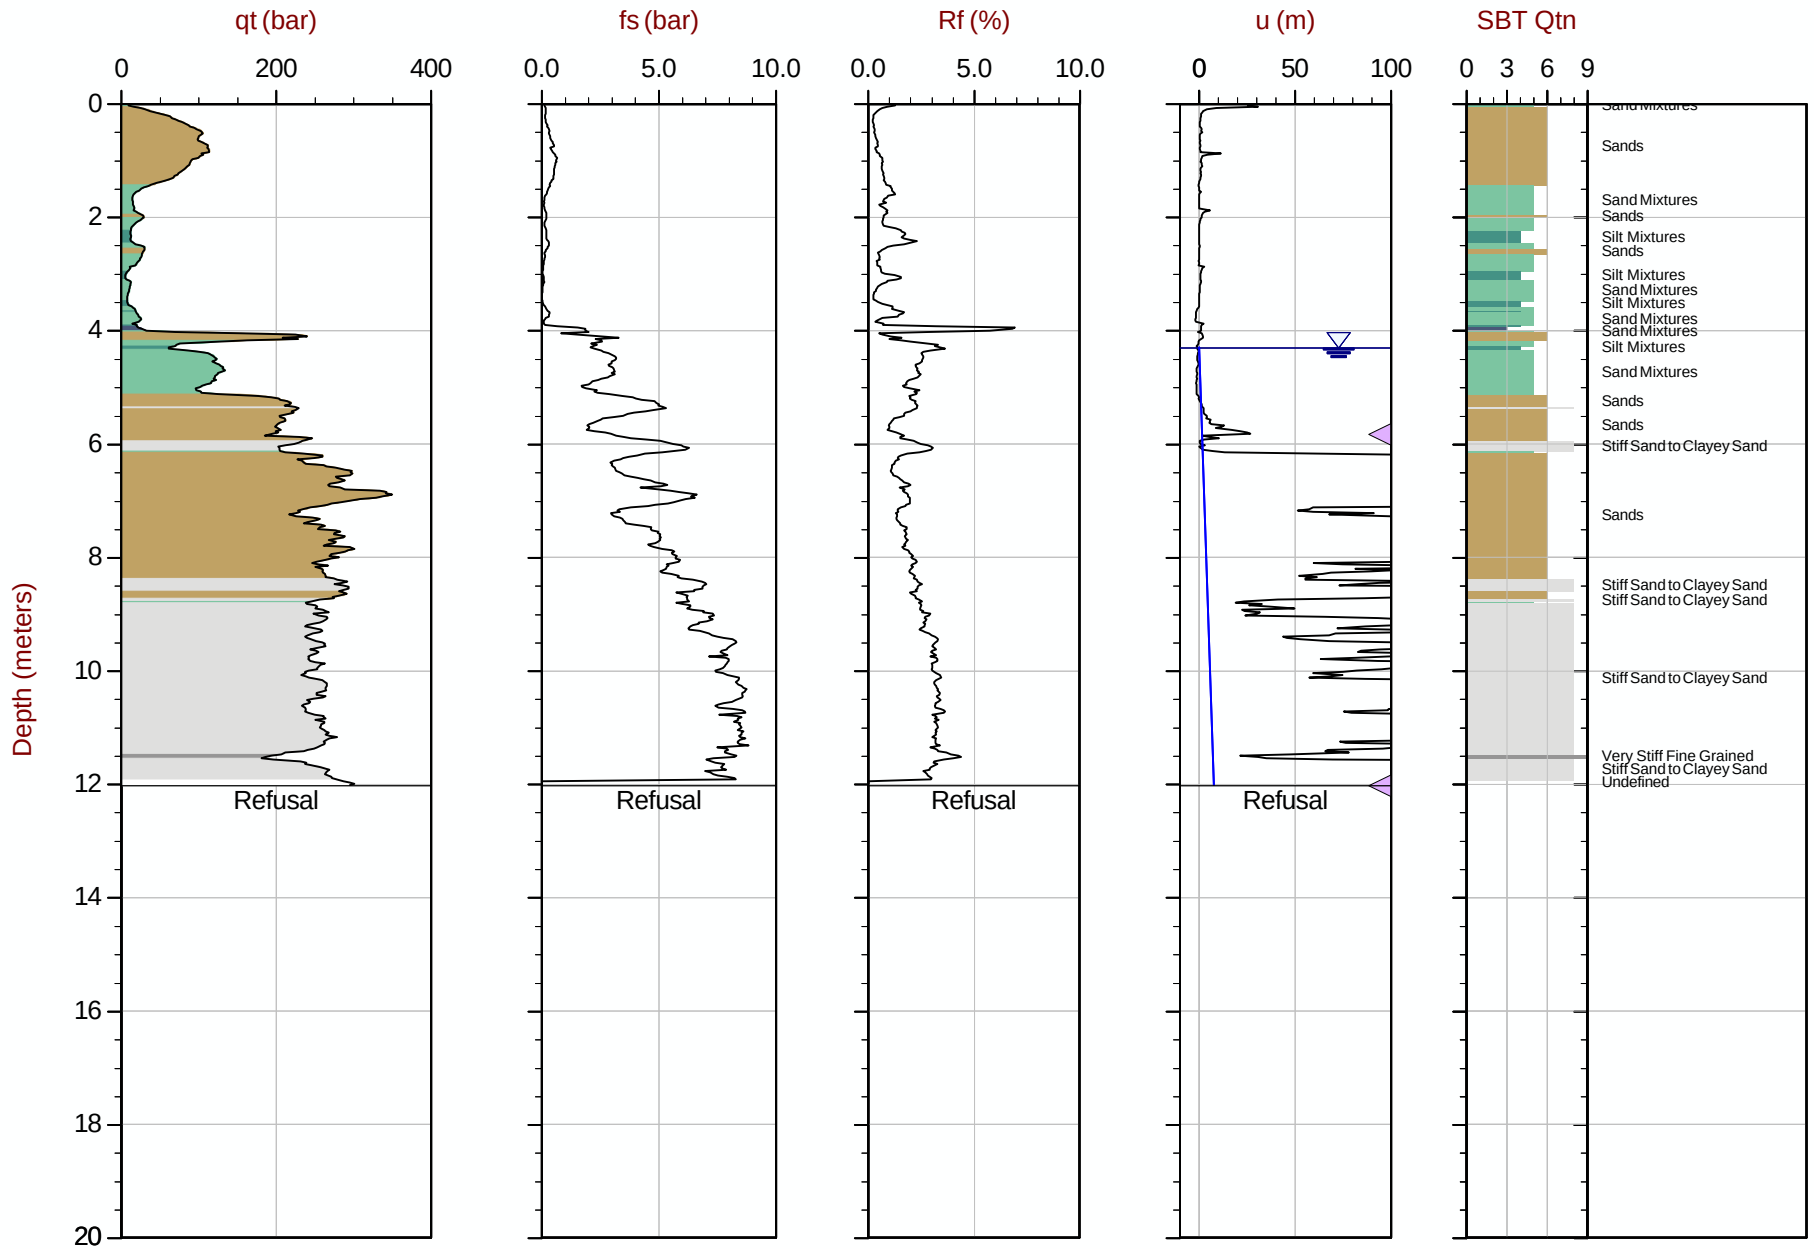

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT267.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611768m E: 416923m Elev: 769.139m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 13:49
Site: Brooks, Alberta

Sounding: RCPT22-22CPT269
Cone: 821:T1000F10U35 Area= 15cm2

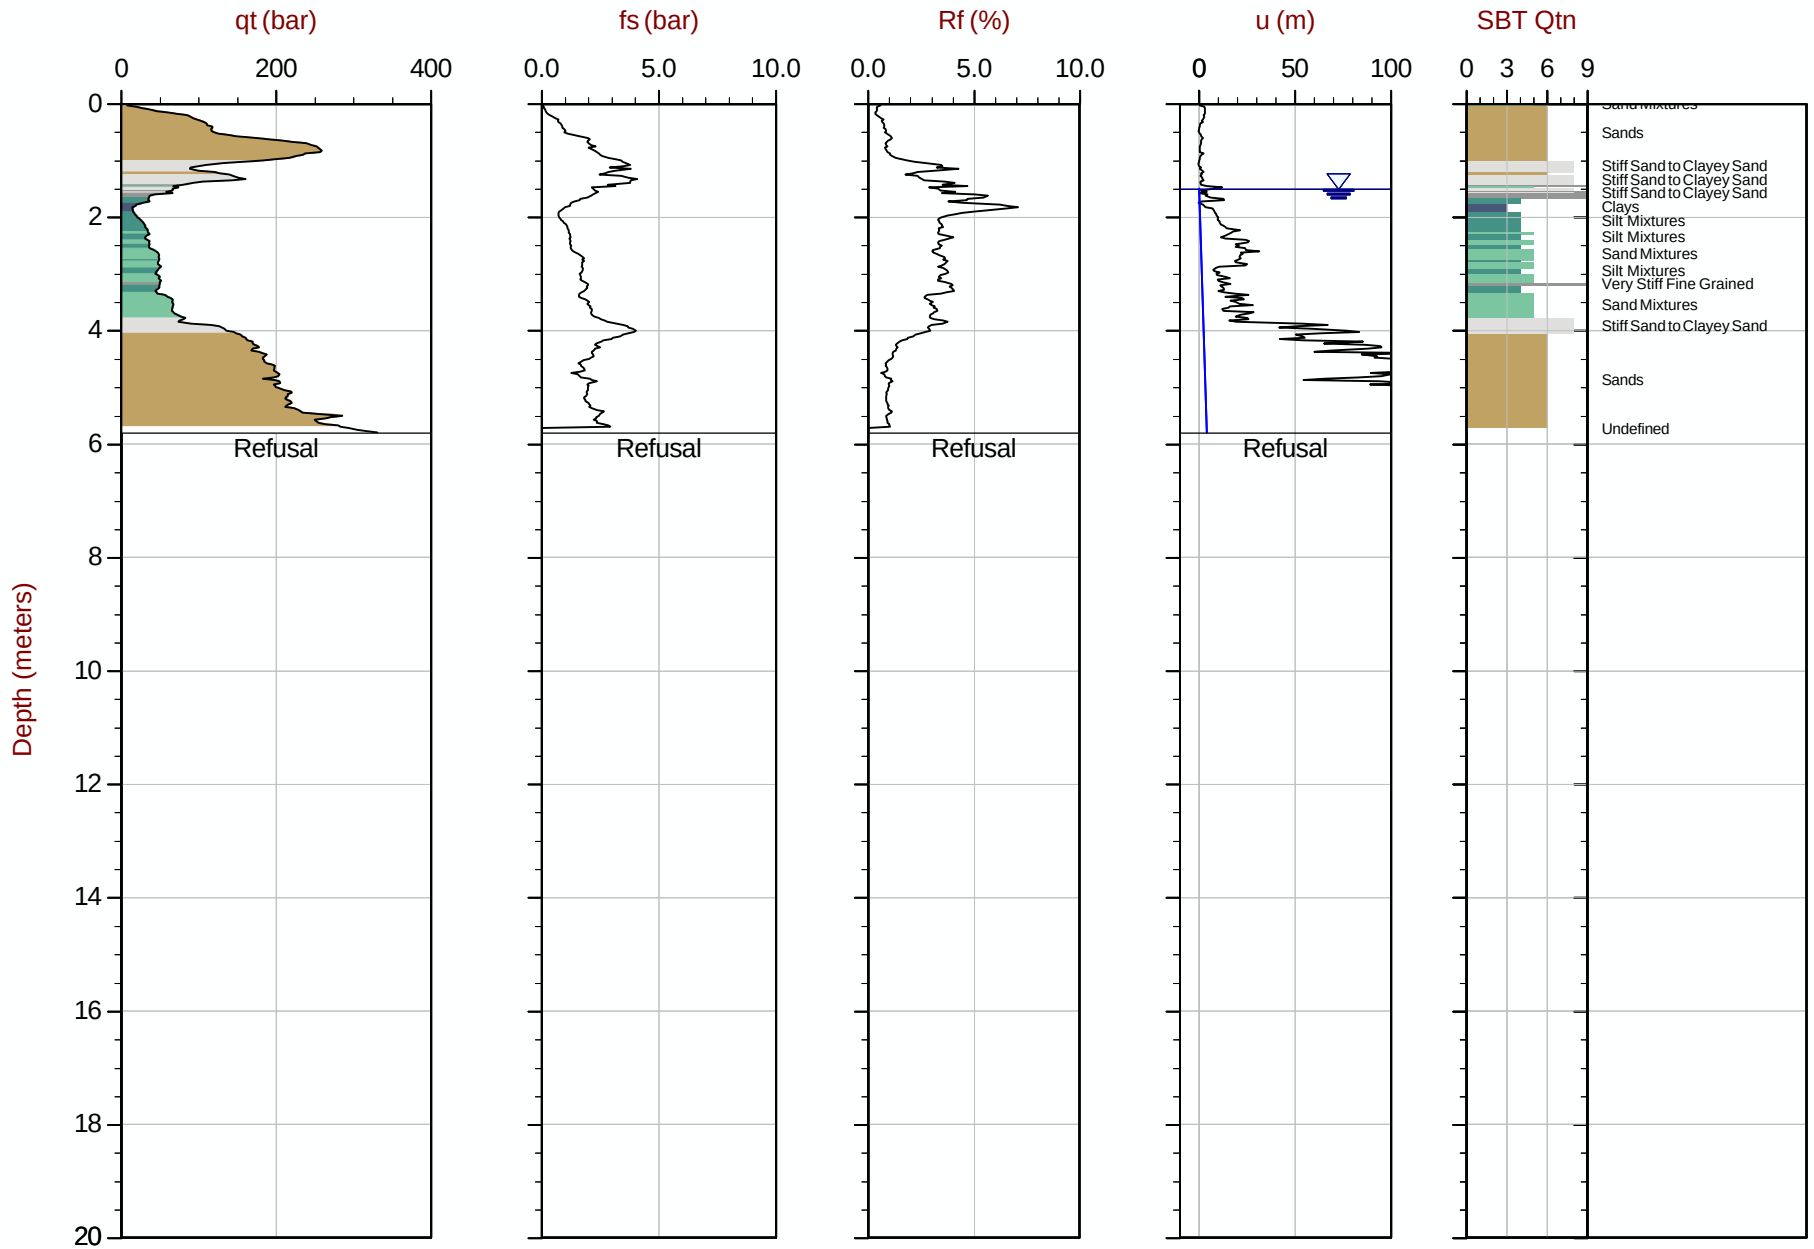

Max Depth: 5.800 m / 19.03 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT269.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611568m E: 416917m Elev: 767.995m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 14:40
Site: Brooks, Alberta

Sounding: RCPT22-22CPT270
Cone: 821:T1000F10U35 Area= 15cm2

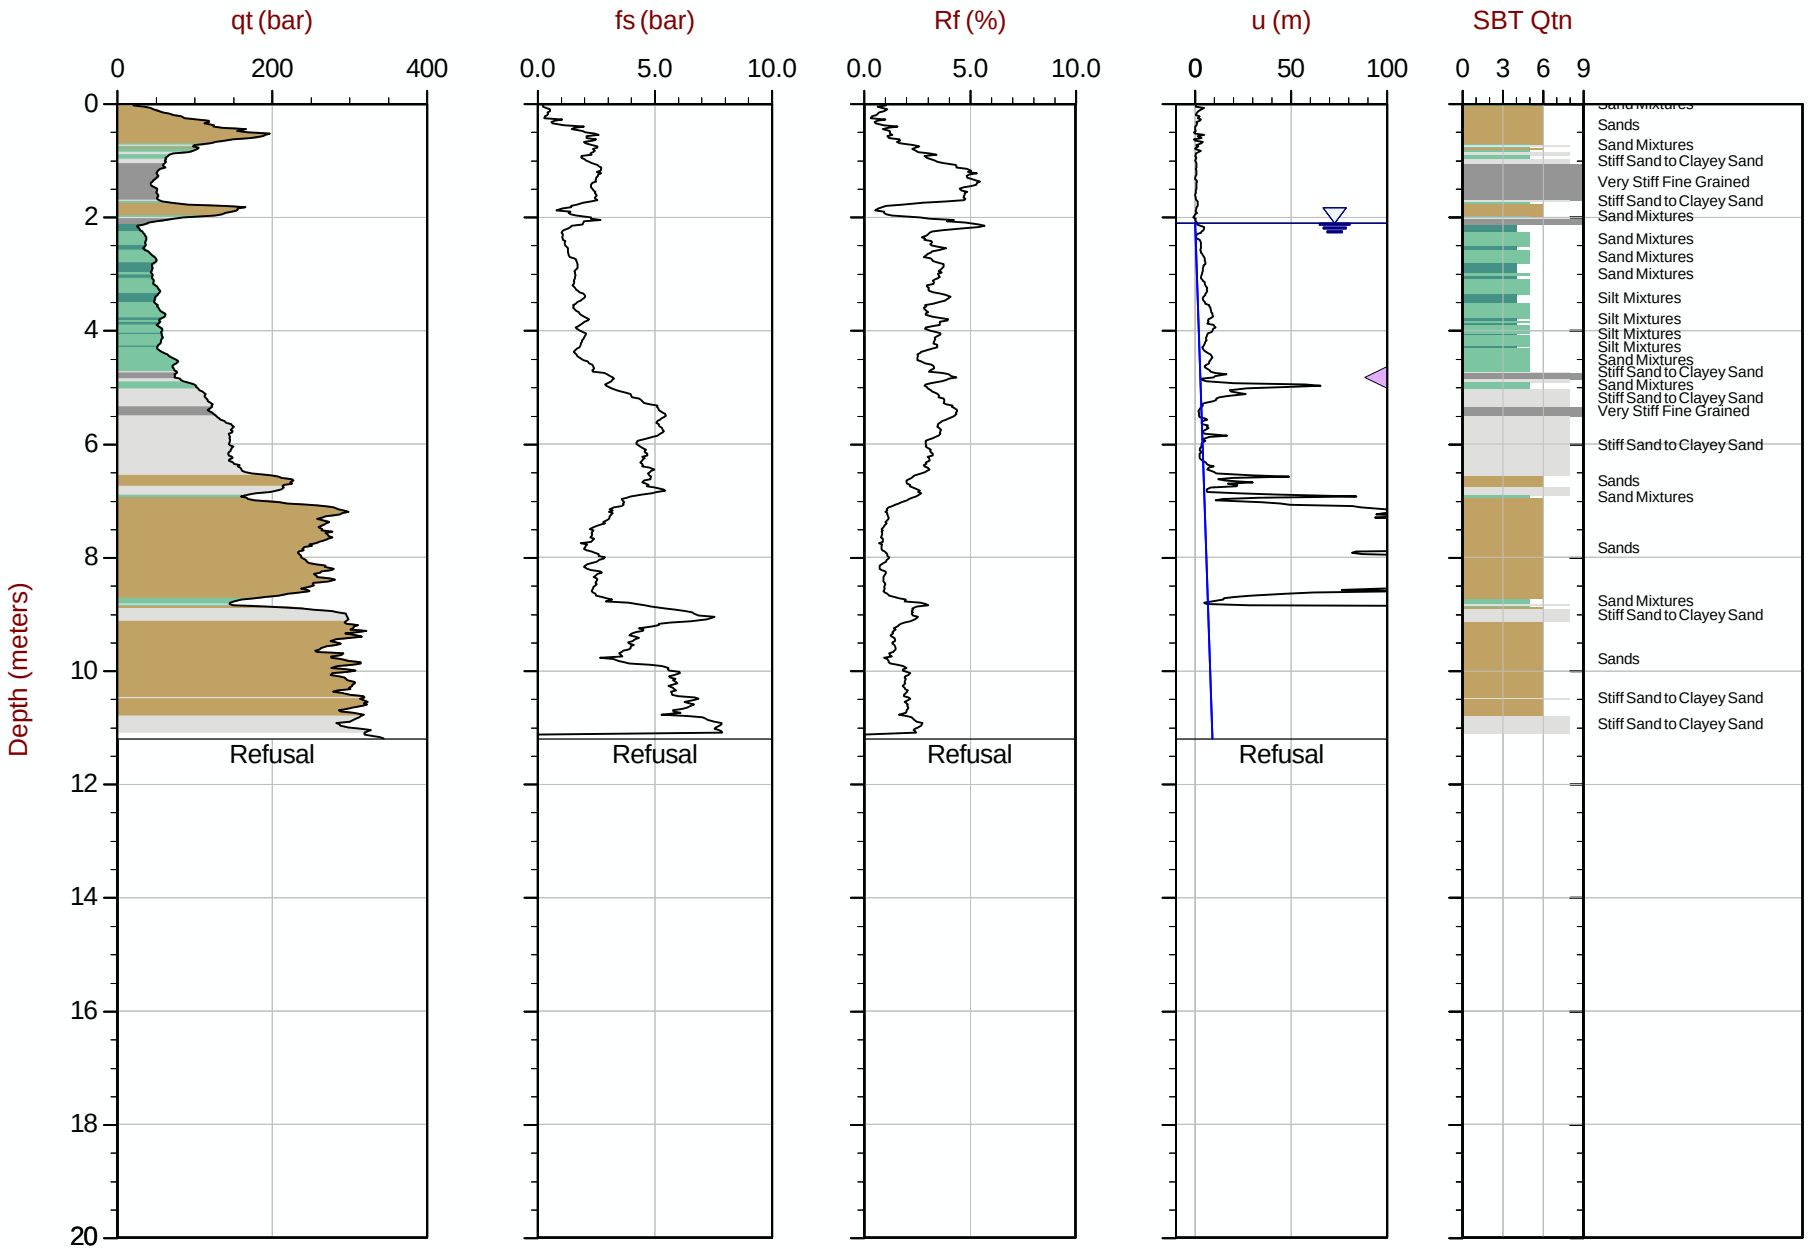

Max Depth: 11.200 m / 36.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT270.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611468m E: 416921m Elev: 768.473m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 15:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT271
Cone: 821:T1000F10U35 Area= 15cm2

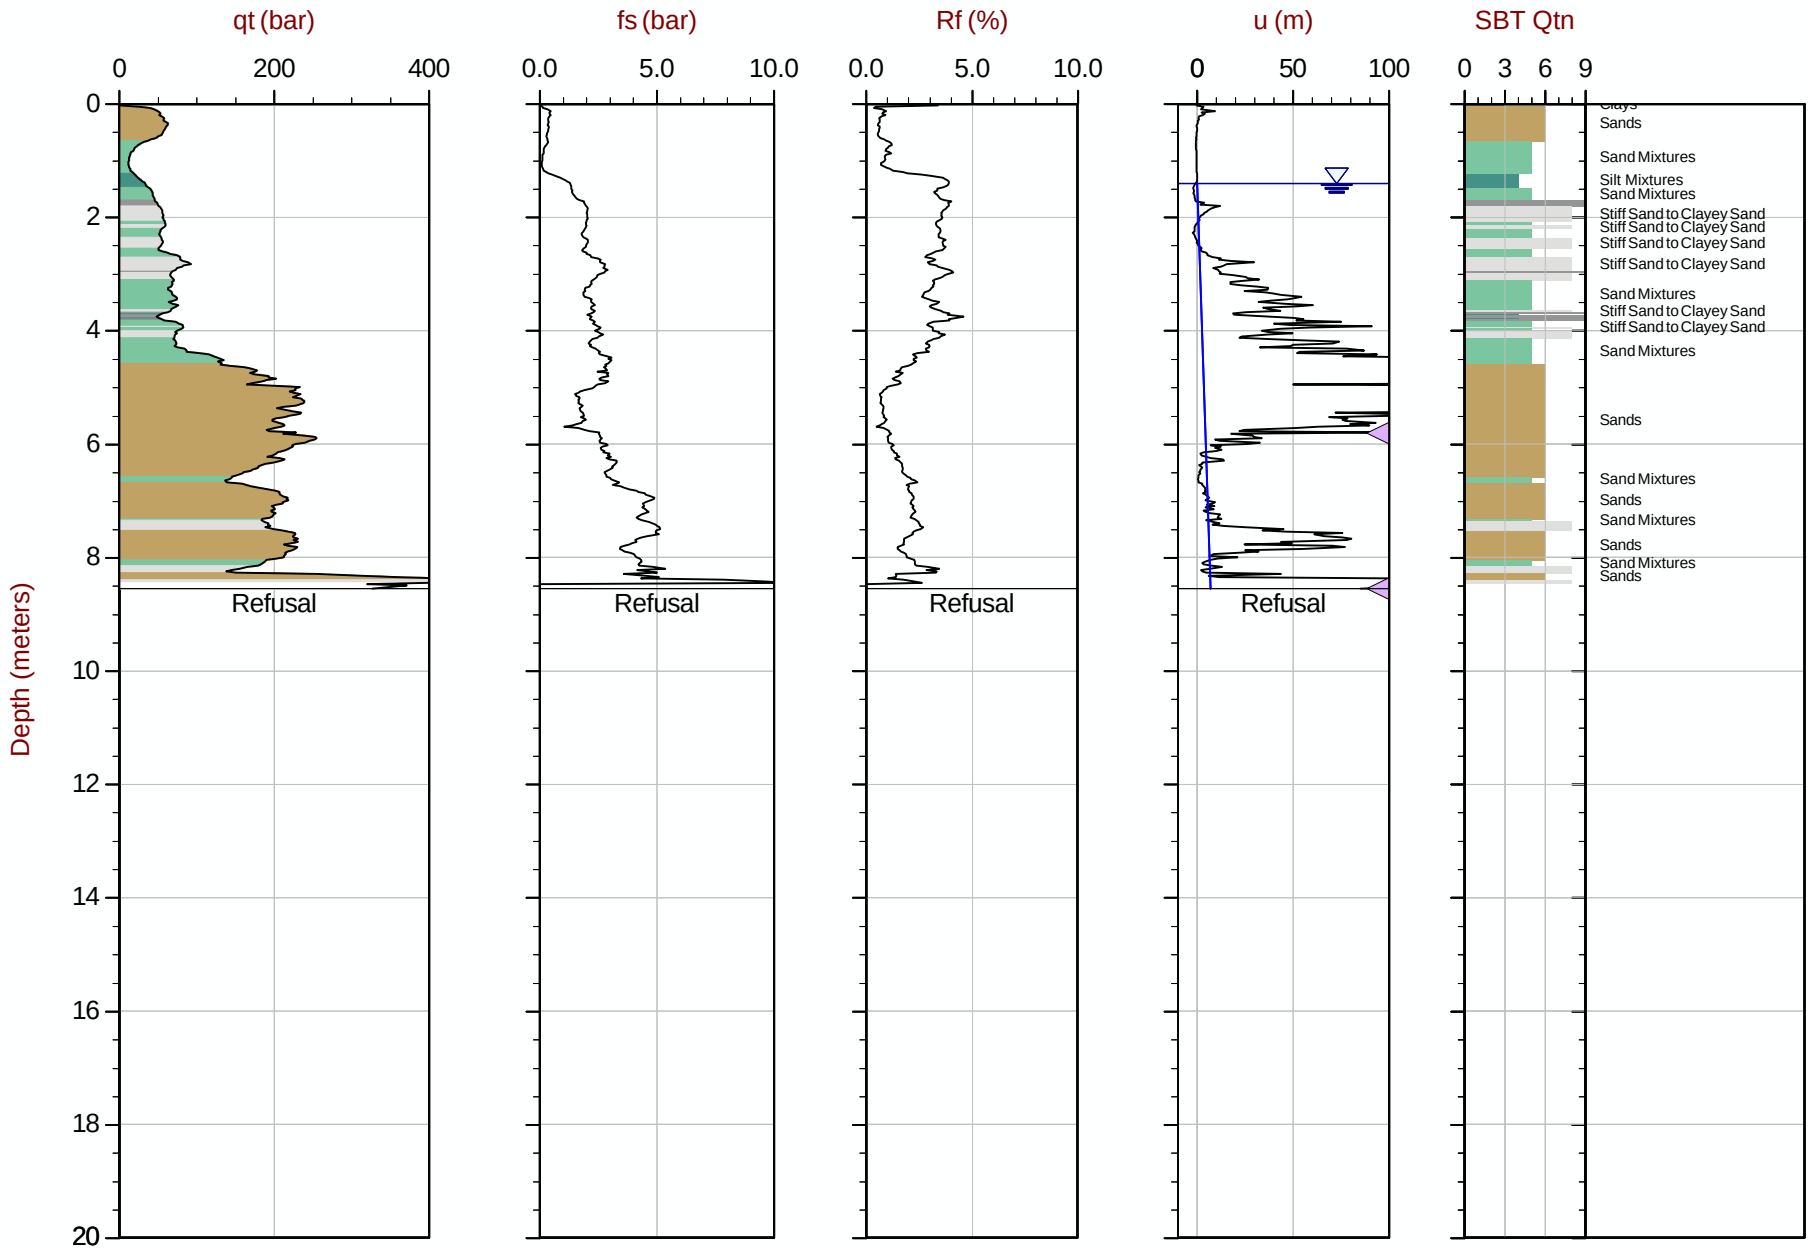

Max Depth: 8.550 m / 28.05 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT271.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611368m E: 416929m Elev: 765.259m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 08:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT272
Cone: 821:T1000F10U35 Area= 15cm2

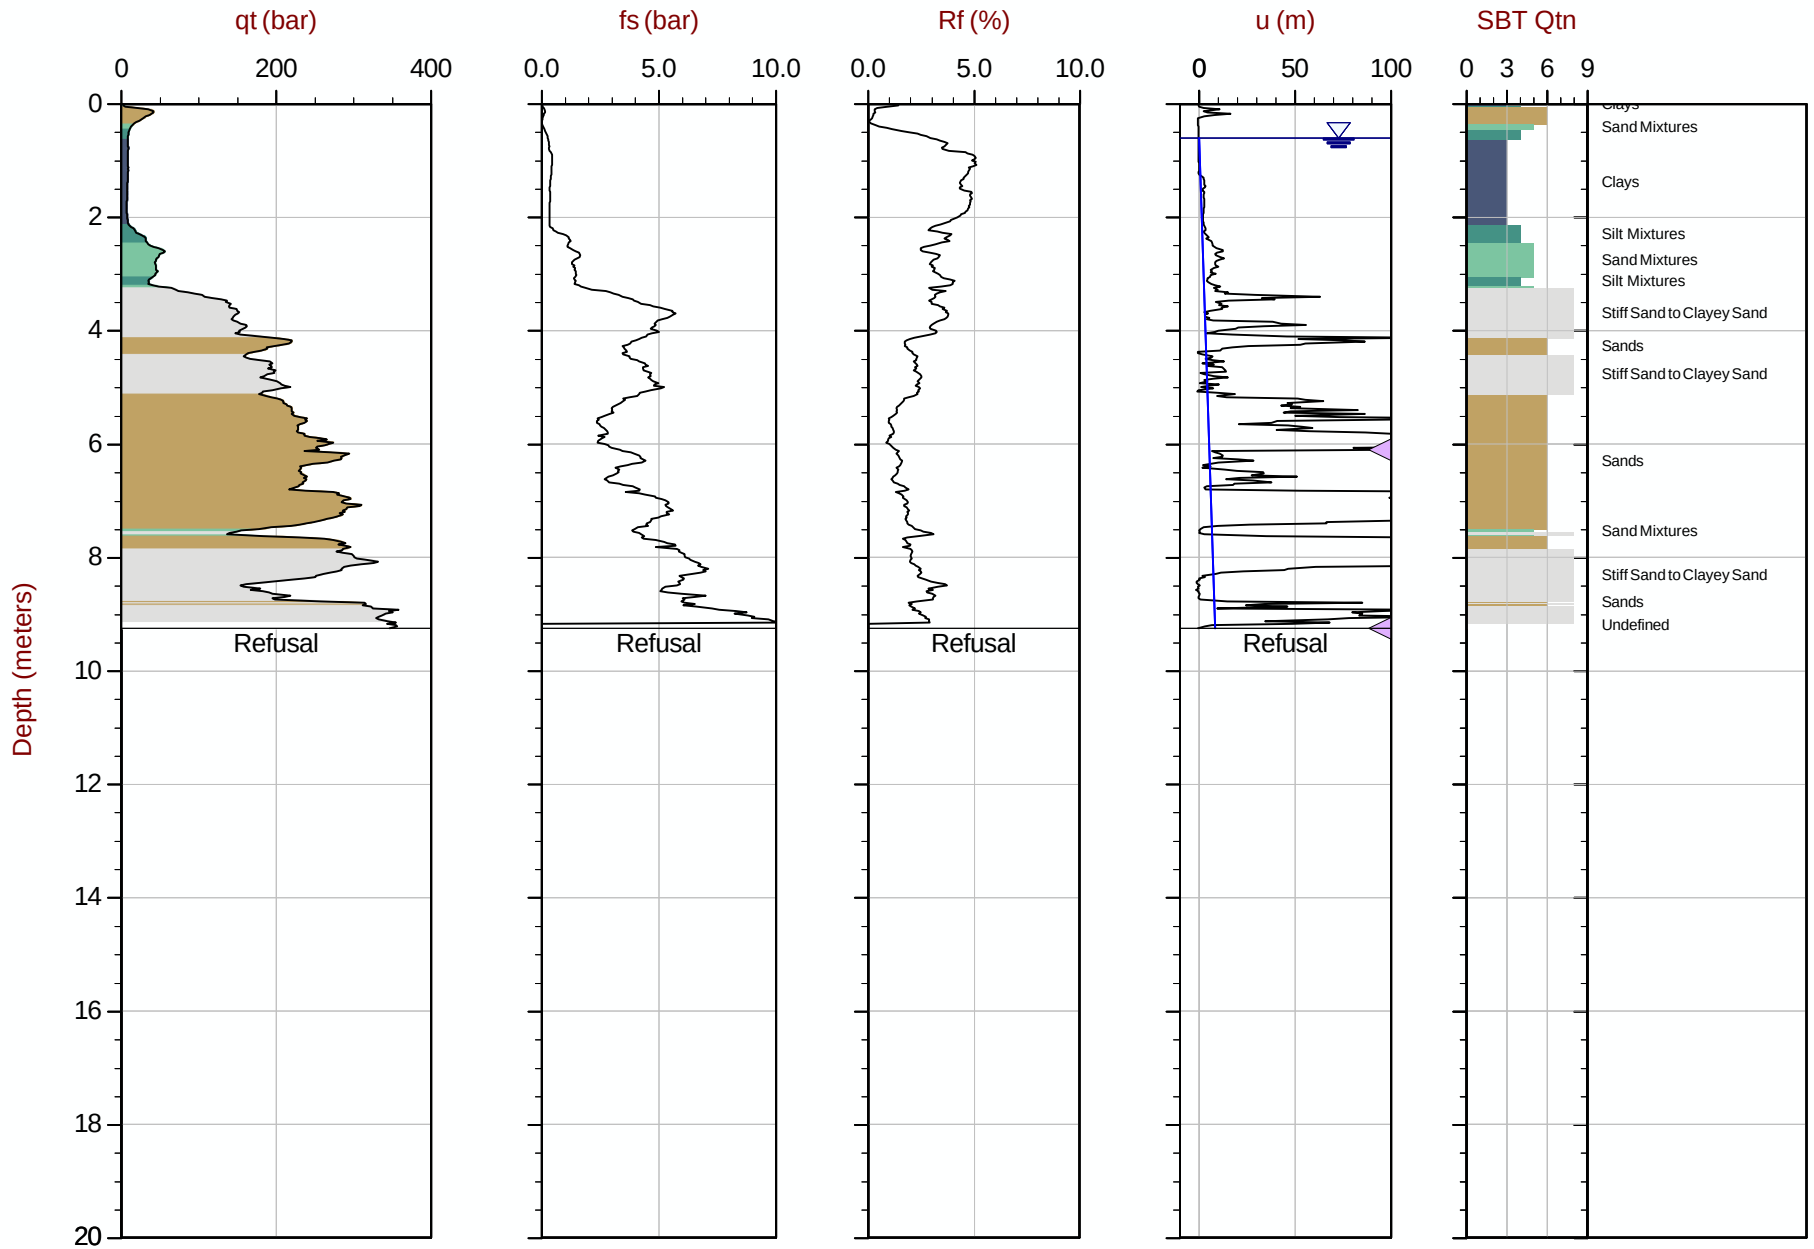

Max Depth: 9.250 m / 30.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT272.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611268m E: 416927m Elev: 764.158m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 09:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT273
Cone: 821:T1000F10U35 Area= 15cm2

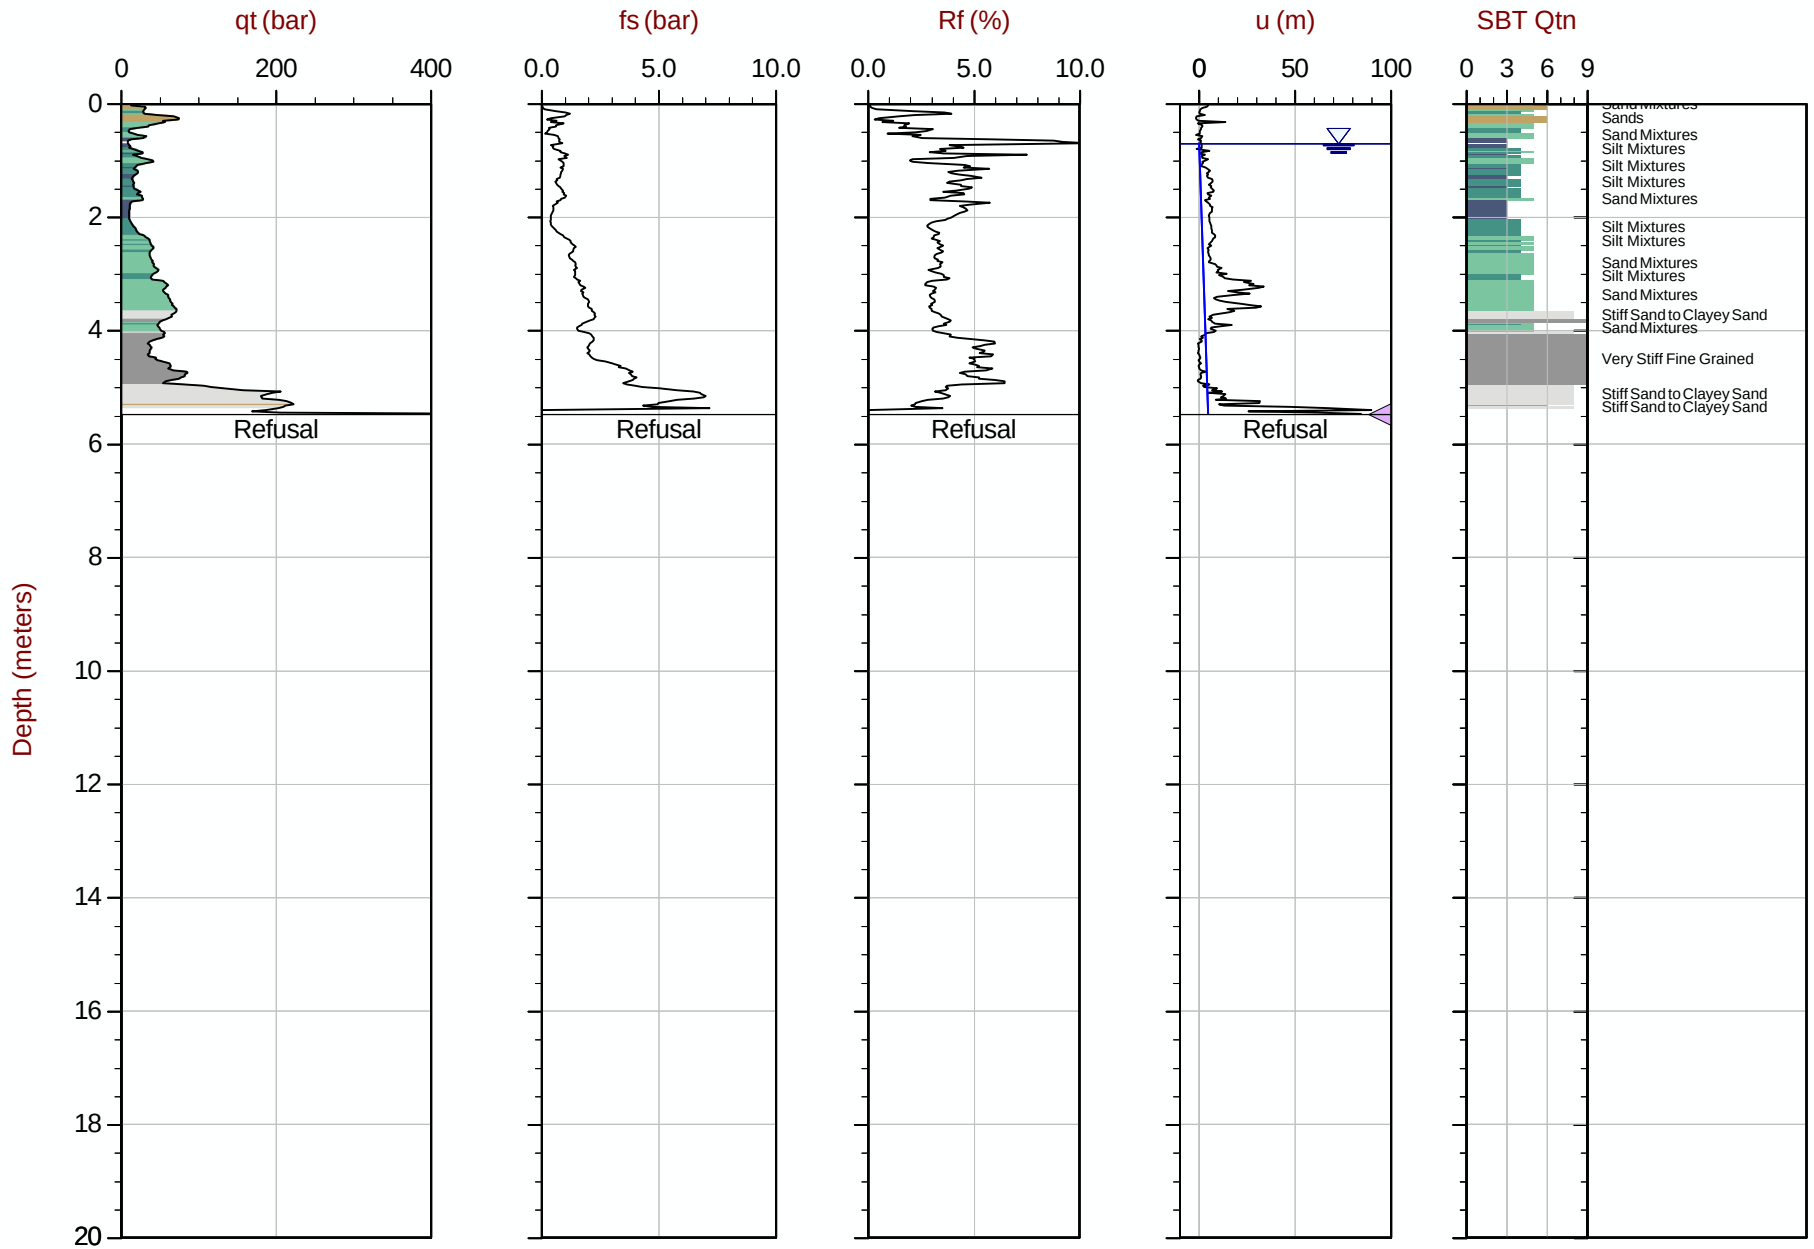

Max Depth: 5.475 m / 17.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT273.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611168m E: 416915m Elev: 765.344m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 17:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT274
Cone: 854:T1500F15U35 Area= 15cm2

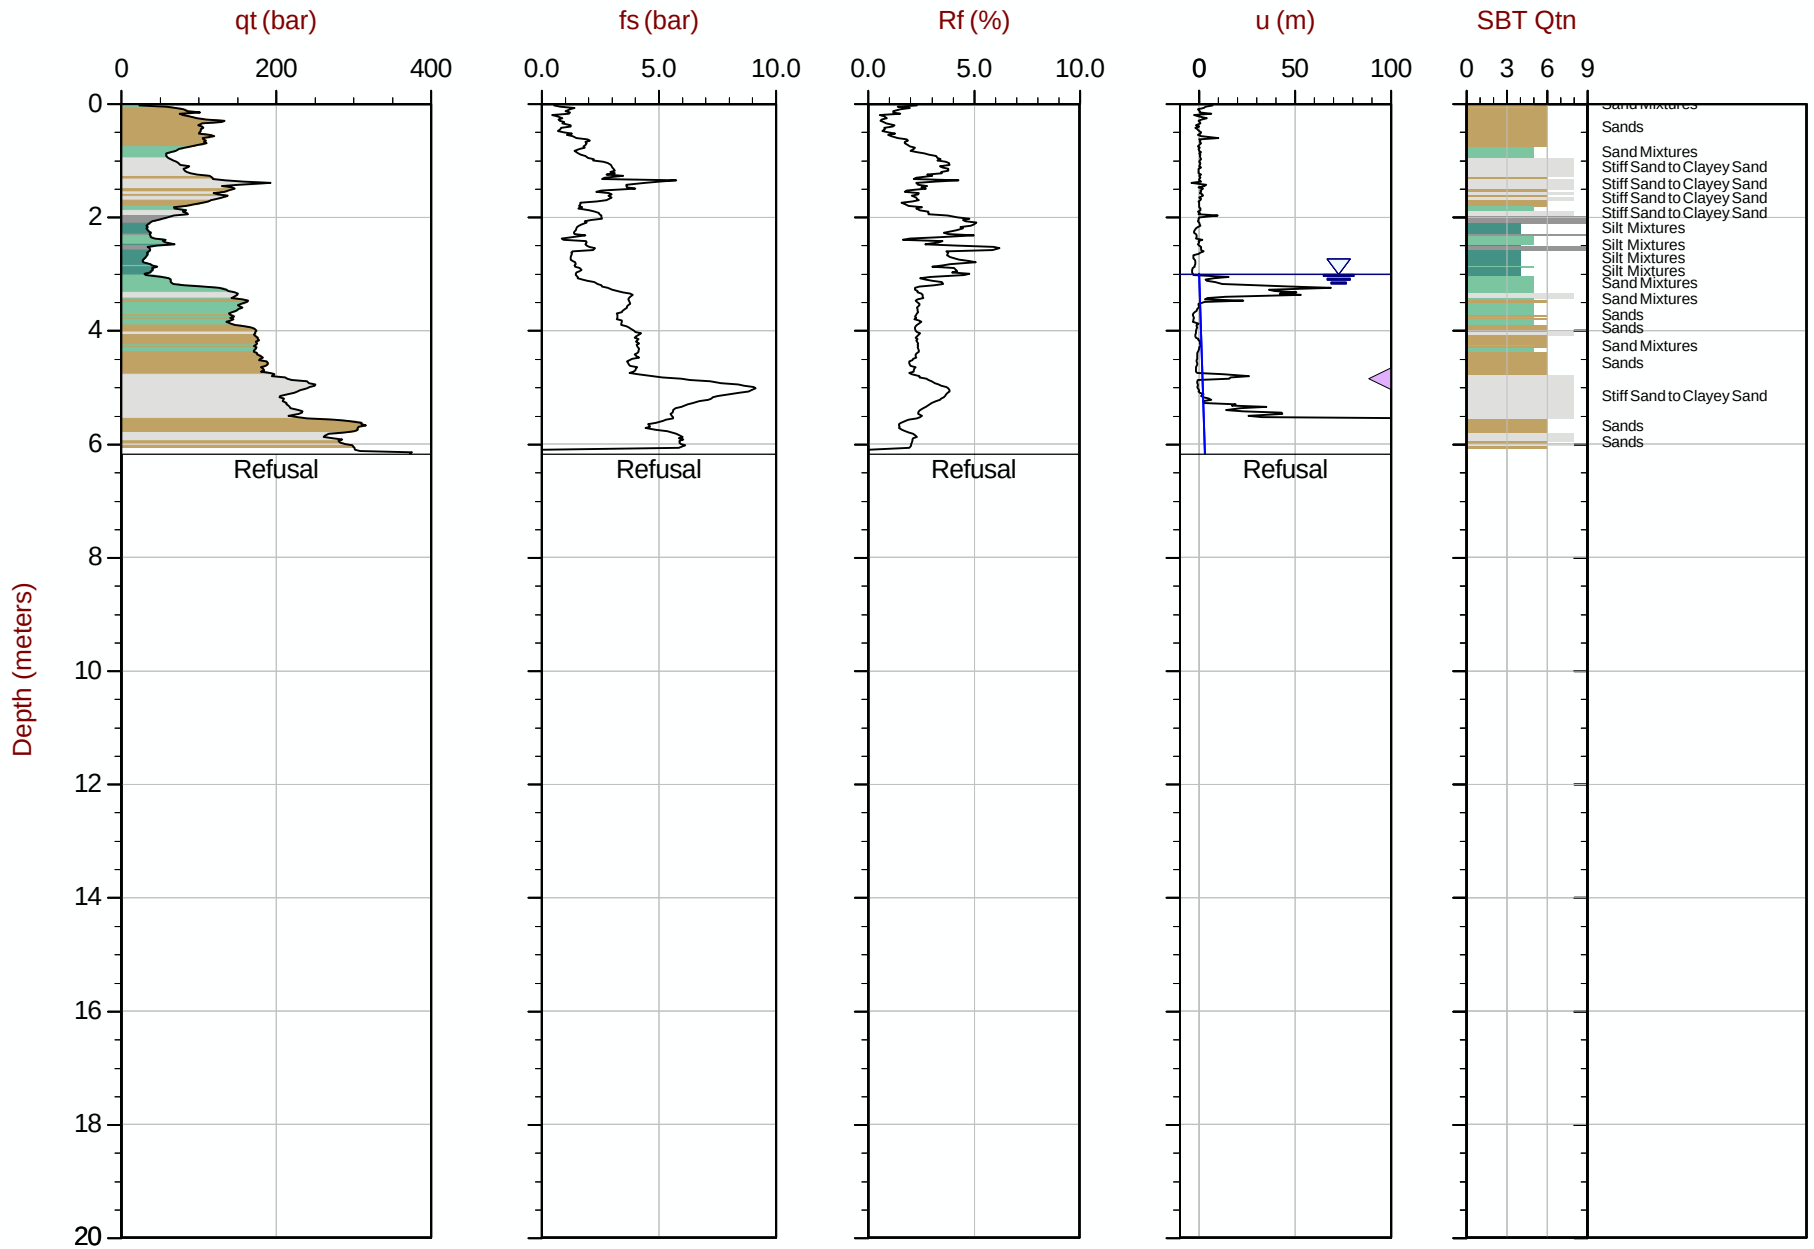

Max Depth: 6.175 m / 20.26 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT274.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611069m E: 416914m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 06:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT275
Cone: 854:T1500F15U35 Area= 15cm2

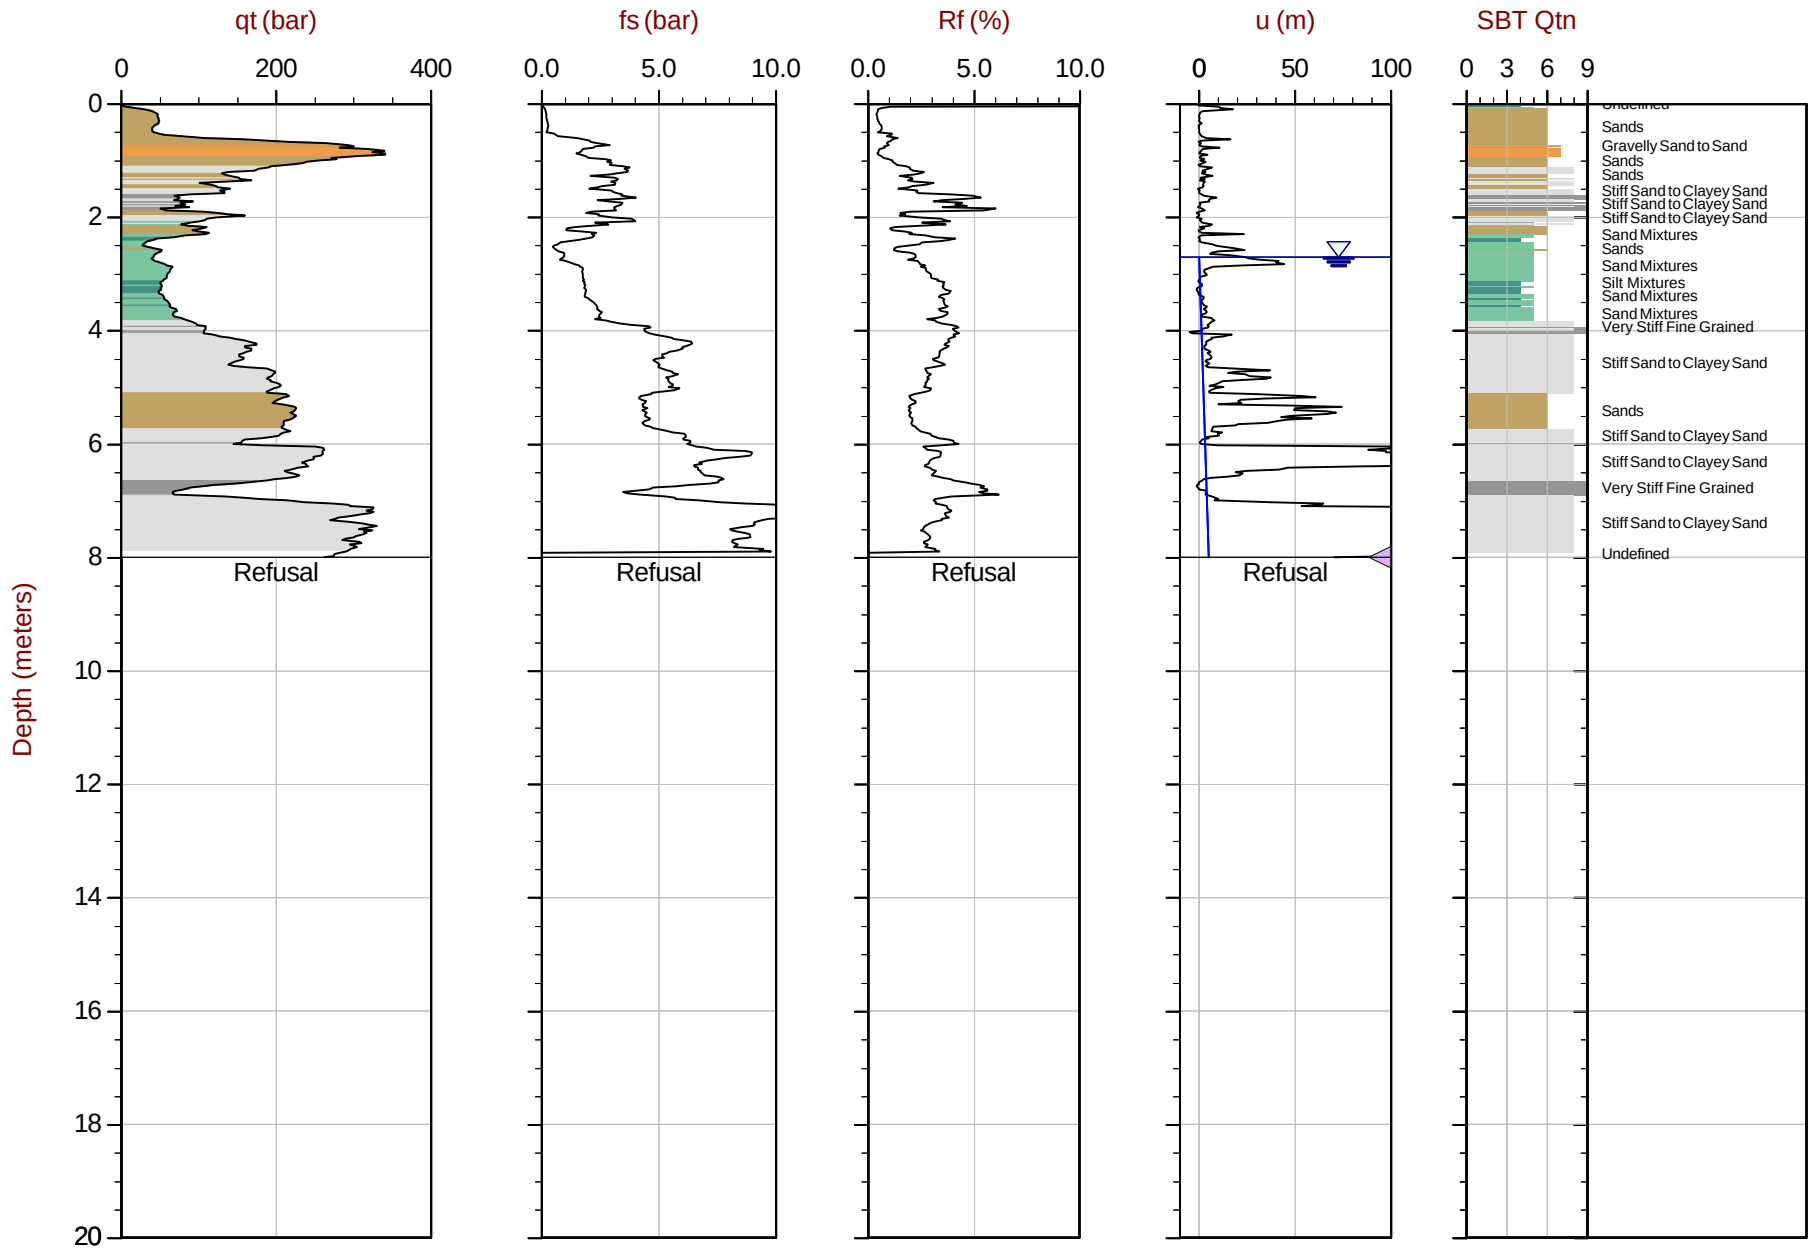

Max Depth: 8.000 m / 26.25 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT275.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610969m E: 416914m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 07:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT276
Cone: 854:T1500F15U35 Area= 15cm2

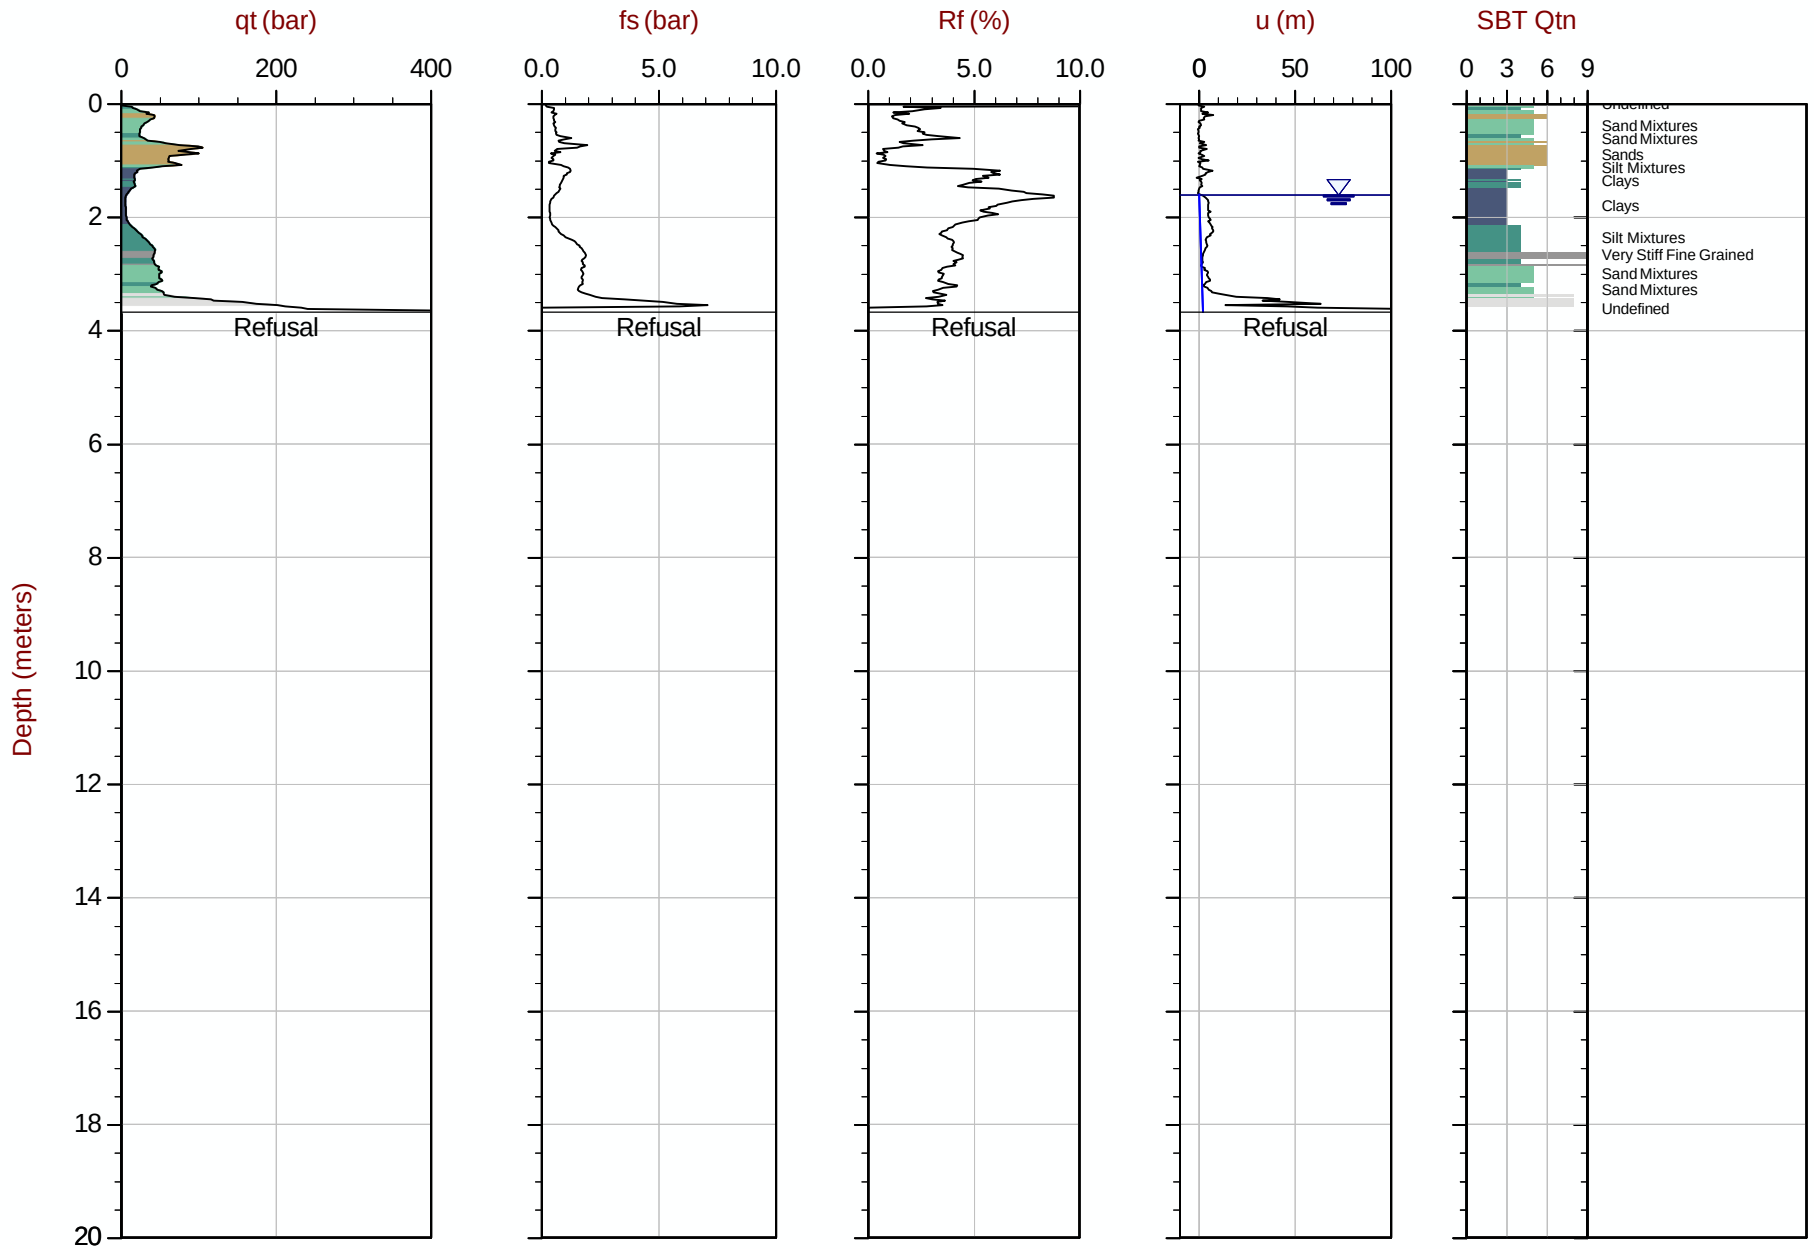

Max Depth: 3.675 m / 12.06 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT276.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610969m E: 416916m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 07:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT276B
Cone: 854:T1500F15U35 Area= 15cm2

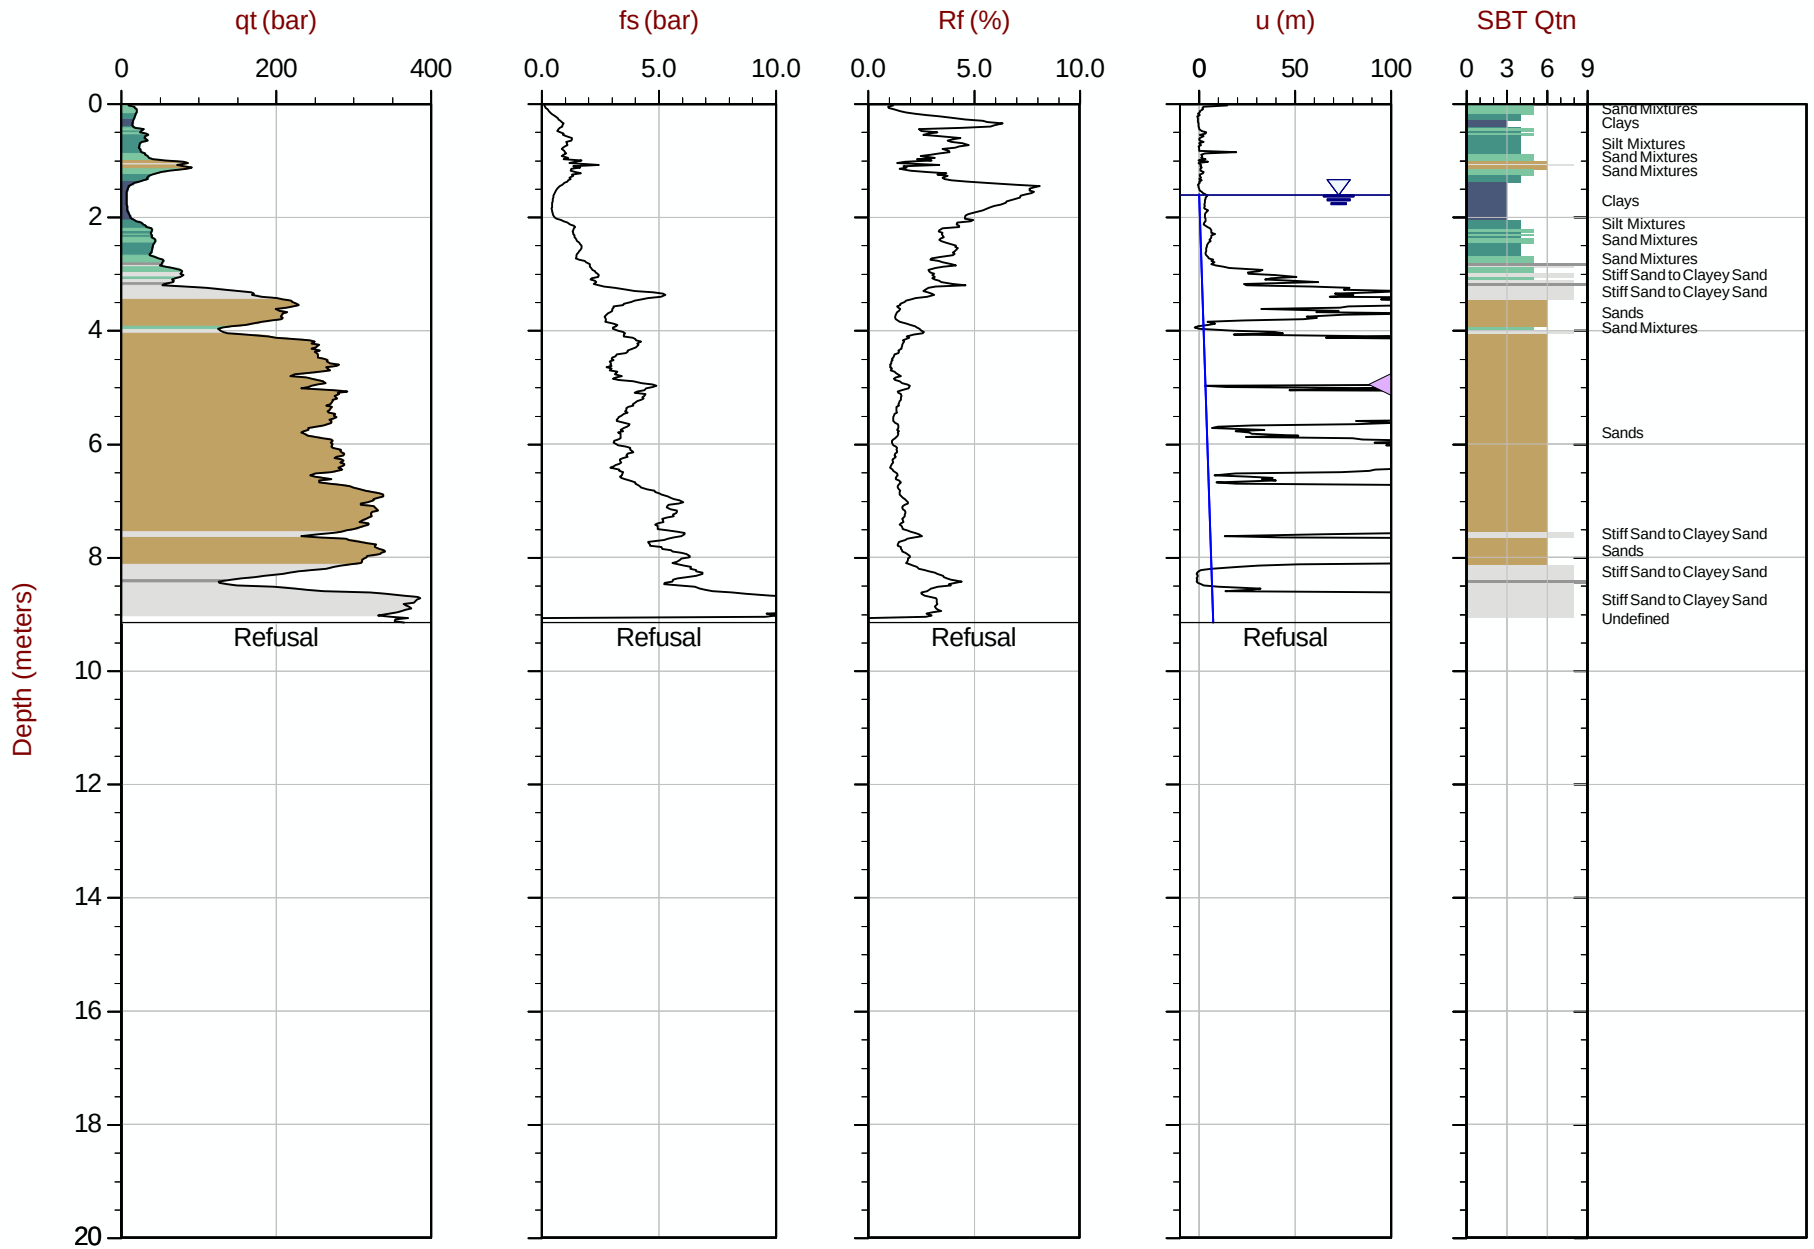

Max Depth: 9.150 m / 30.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT276B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610969m E: 416916m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 09:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT277
Cone: 854:T1500F15U35 Area= 15cm2

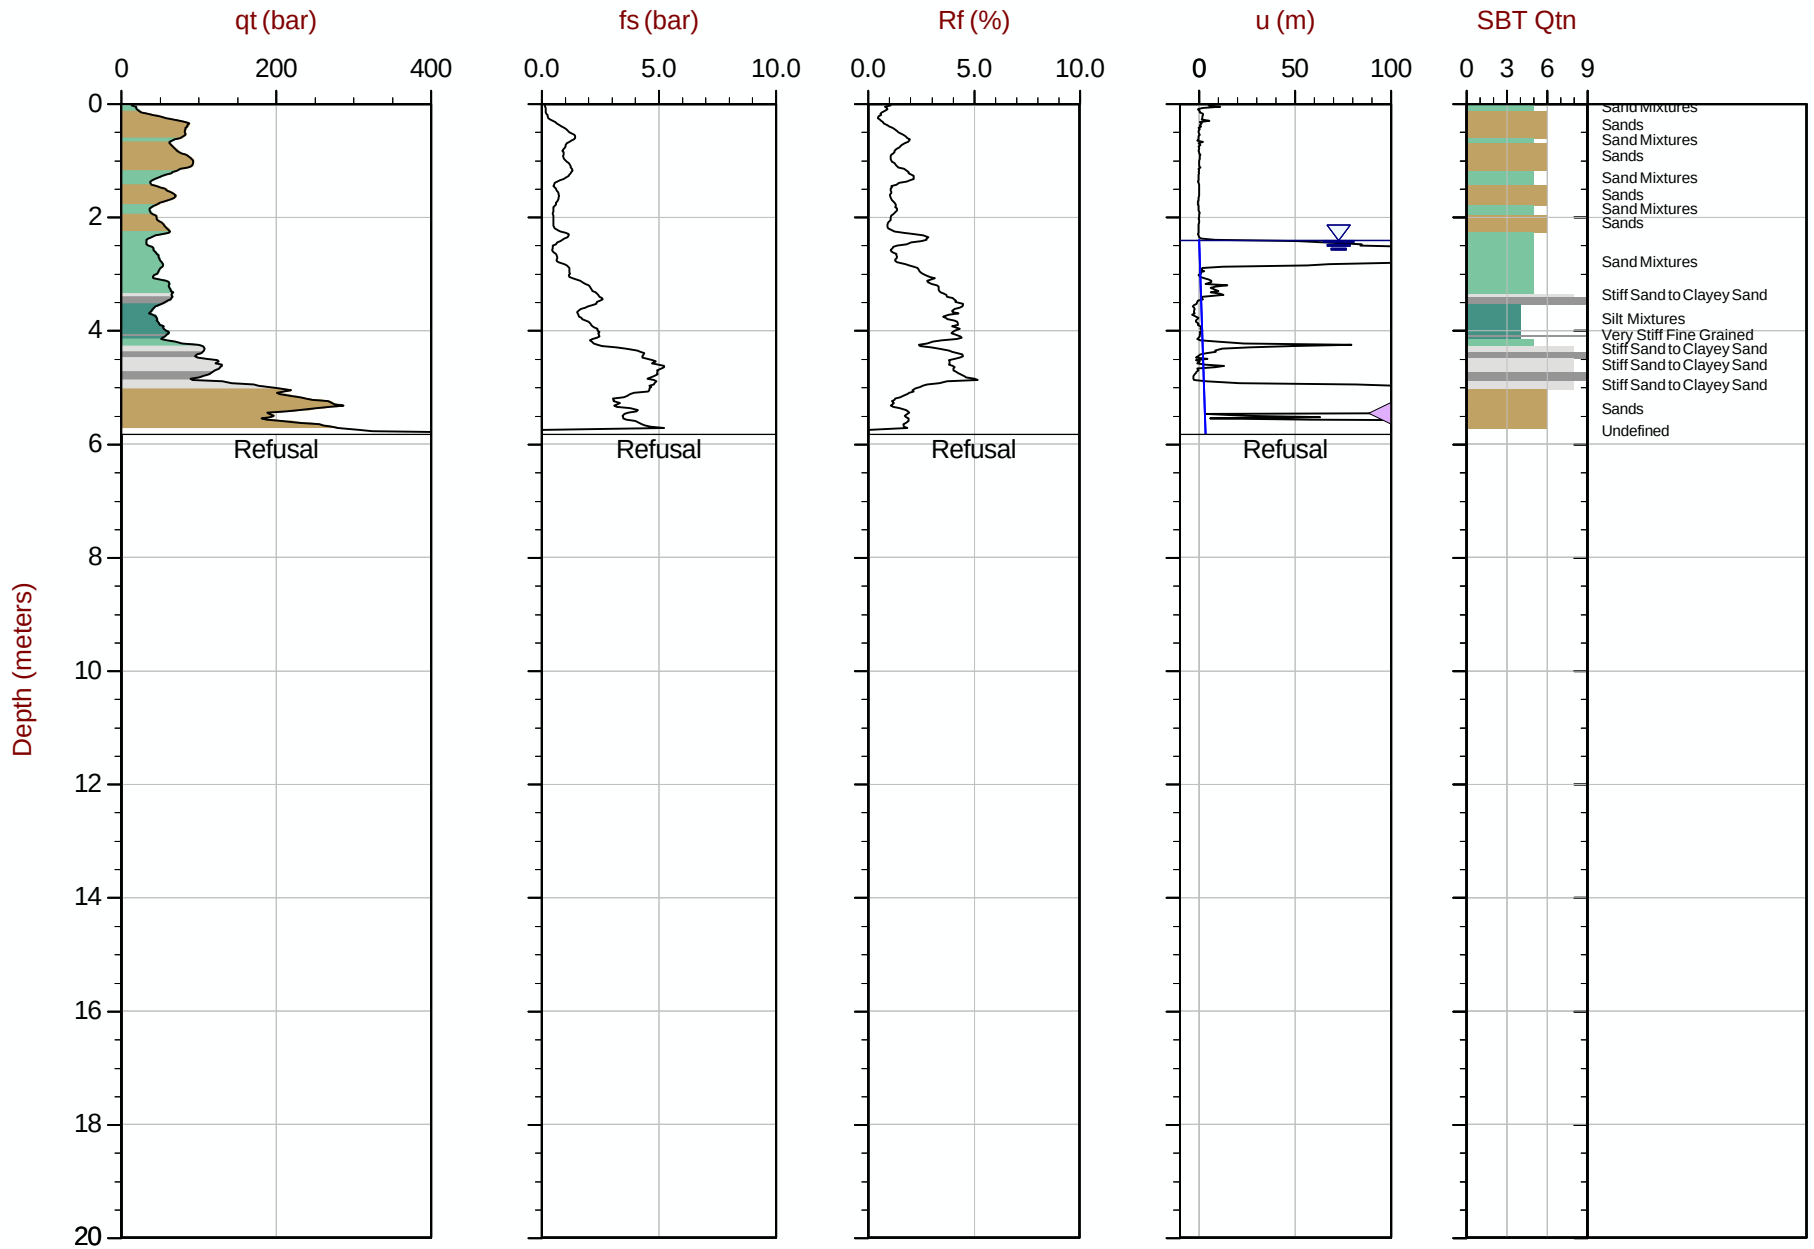

Max Depth: 5.825 m / 19.11 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT277.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610770m E: 416912m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 10:35
Site: Brooks, Alberta

Sounding: RCPT22-22CPT278
Cone: 854:T1500F15U35 Area= 15cm2

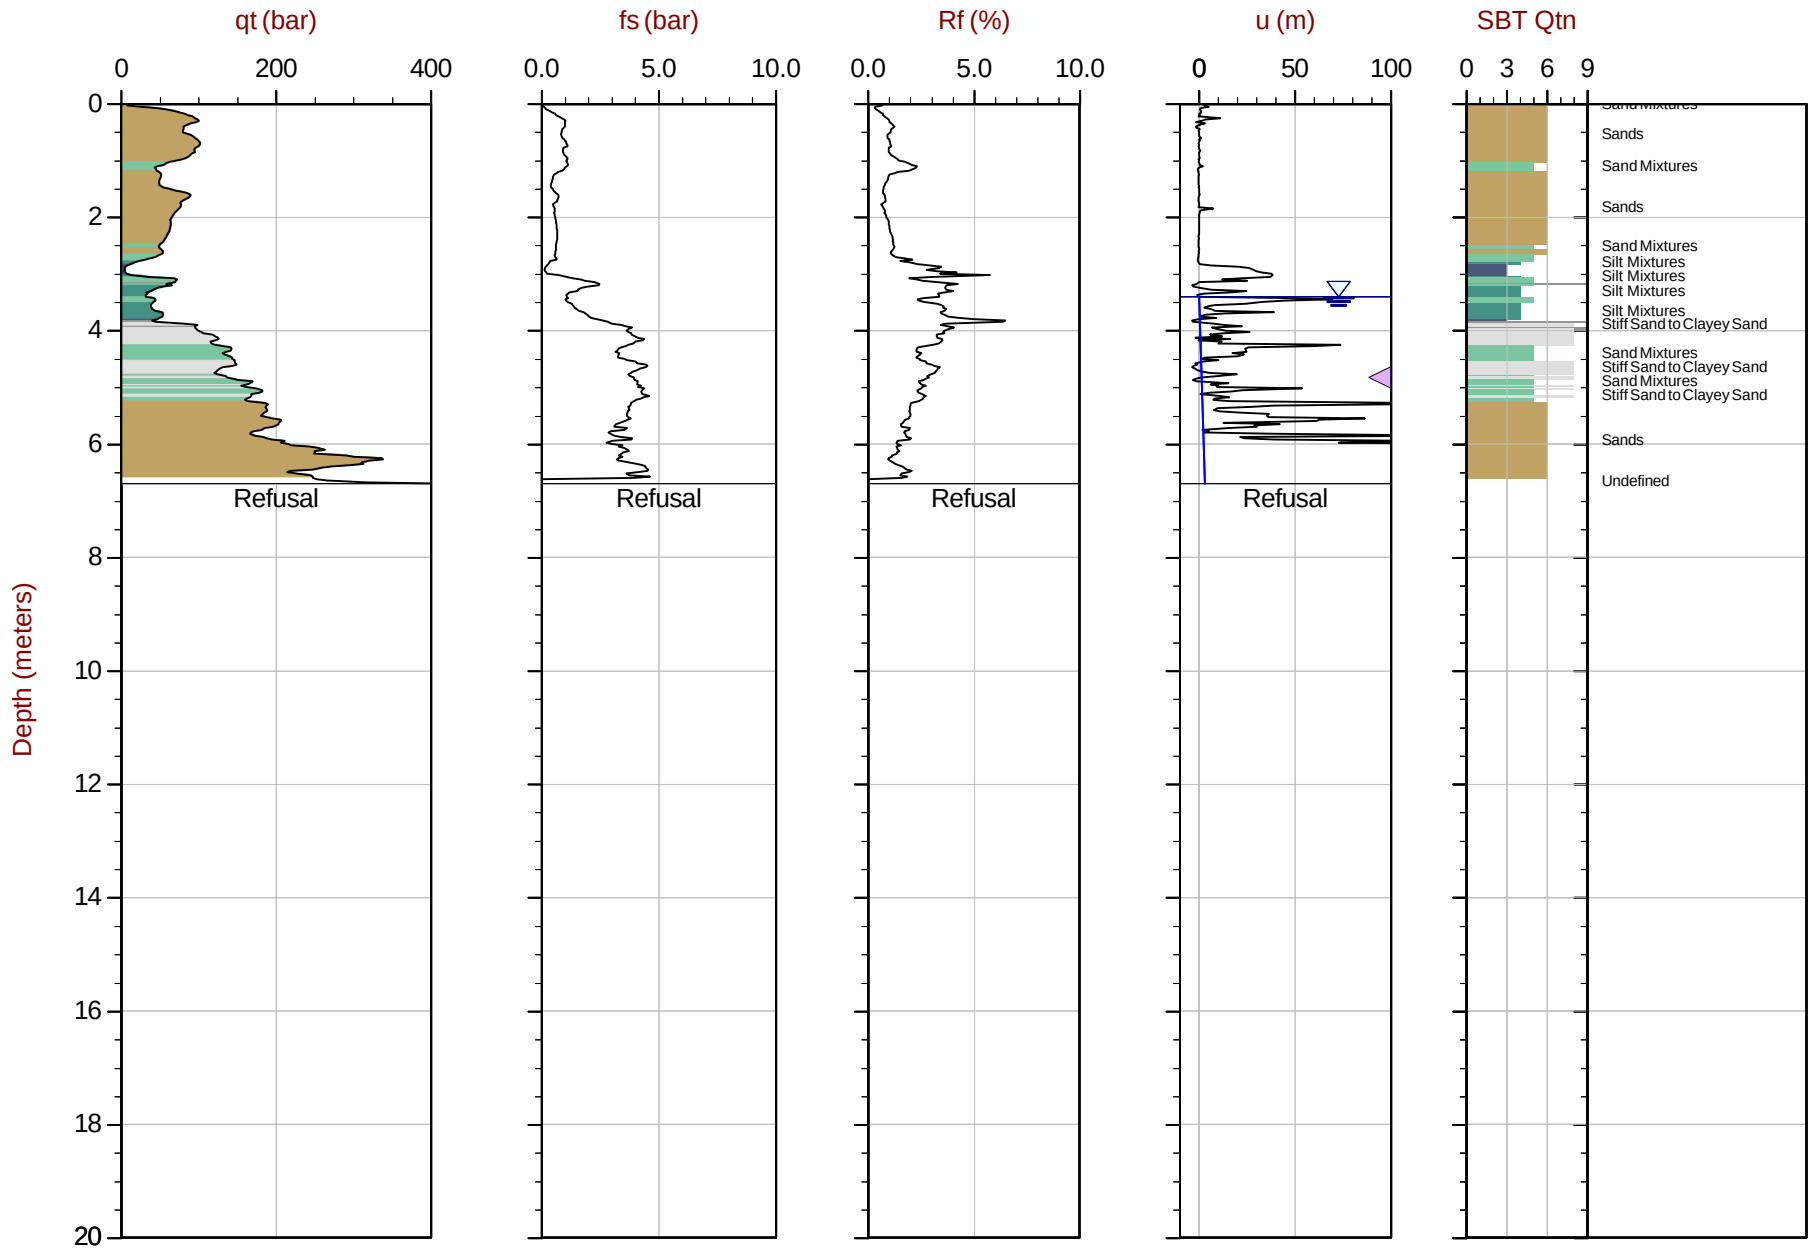

Max Depth: 6.700 m / 21.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT278.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610669m E: 416910m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 11:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT279
Cone: 854:T1500F15U35 Area= 15cm2

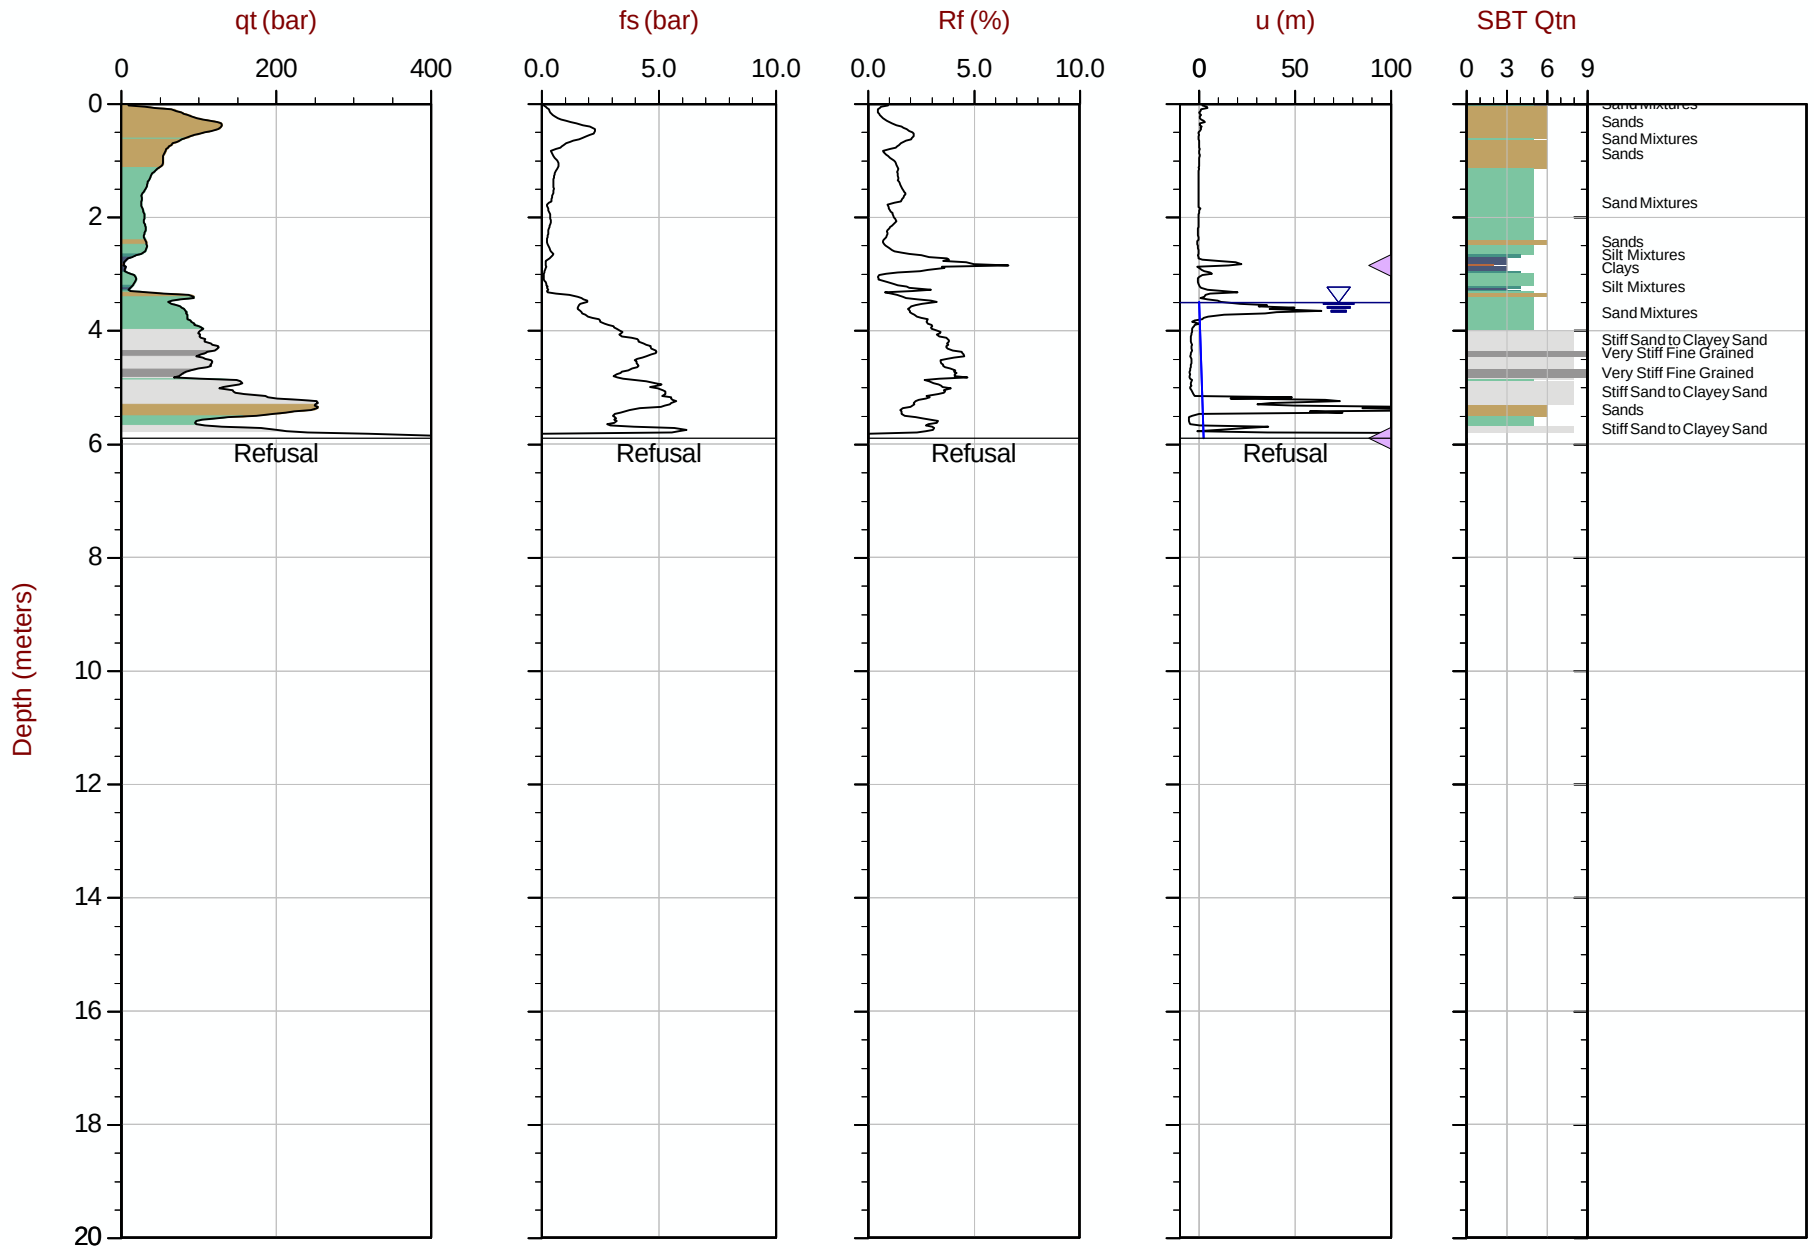

Max Depth: 5.900 m / 19.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT279.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610568m E: 416908m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 12:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT280
Cone: 854:T1500F15U35 Area= 15cm2

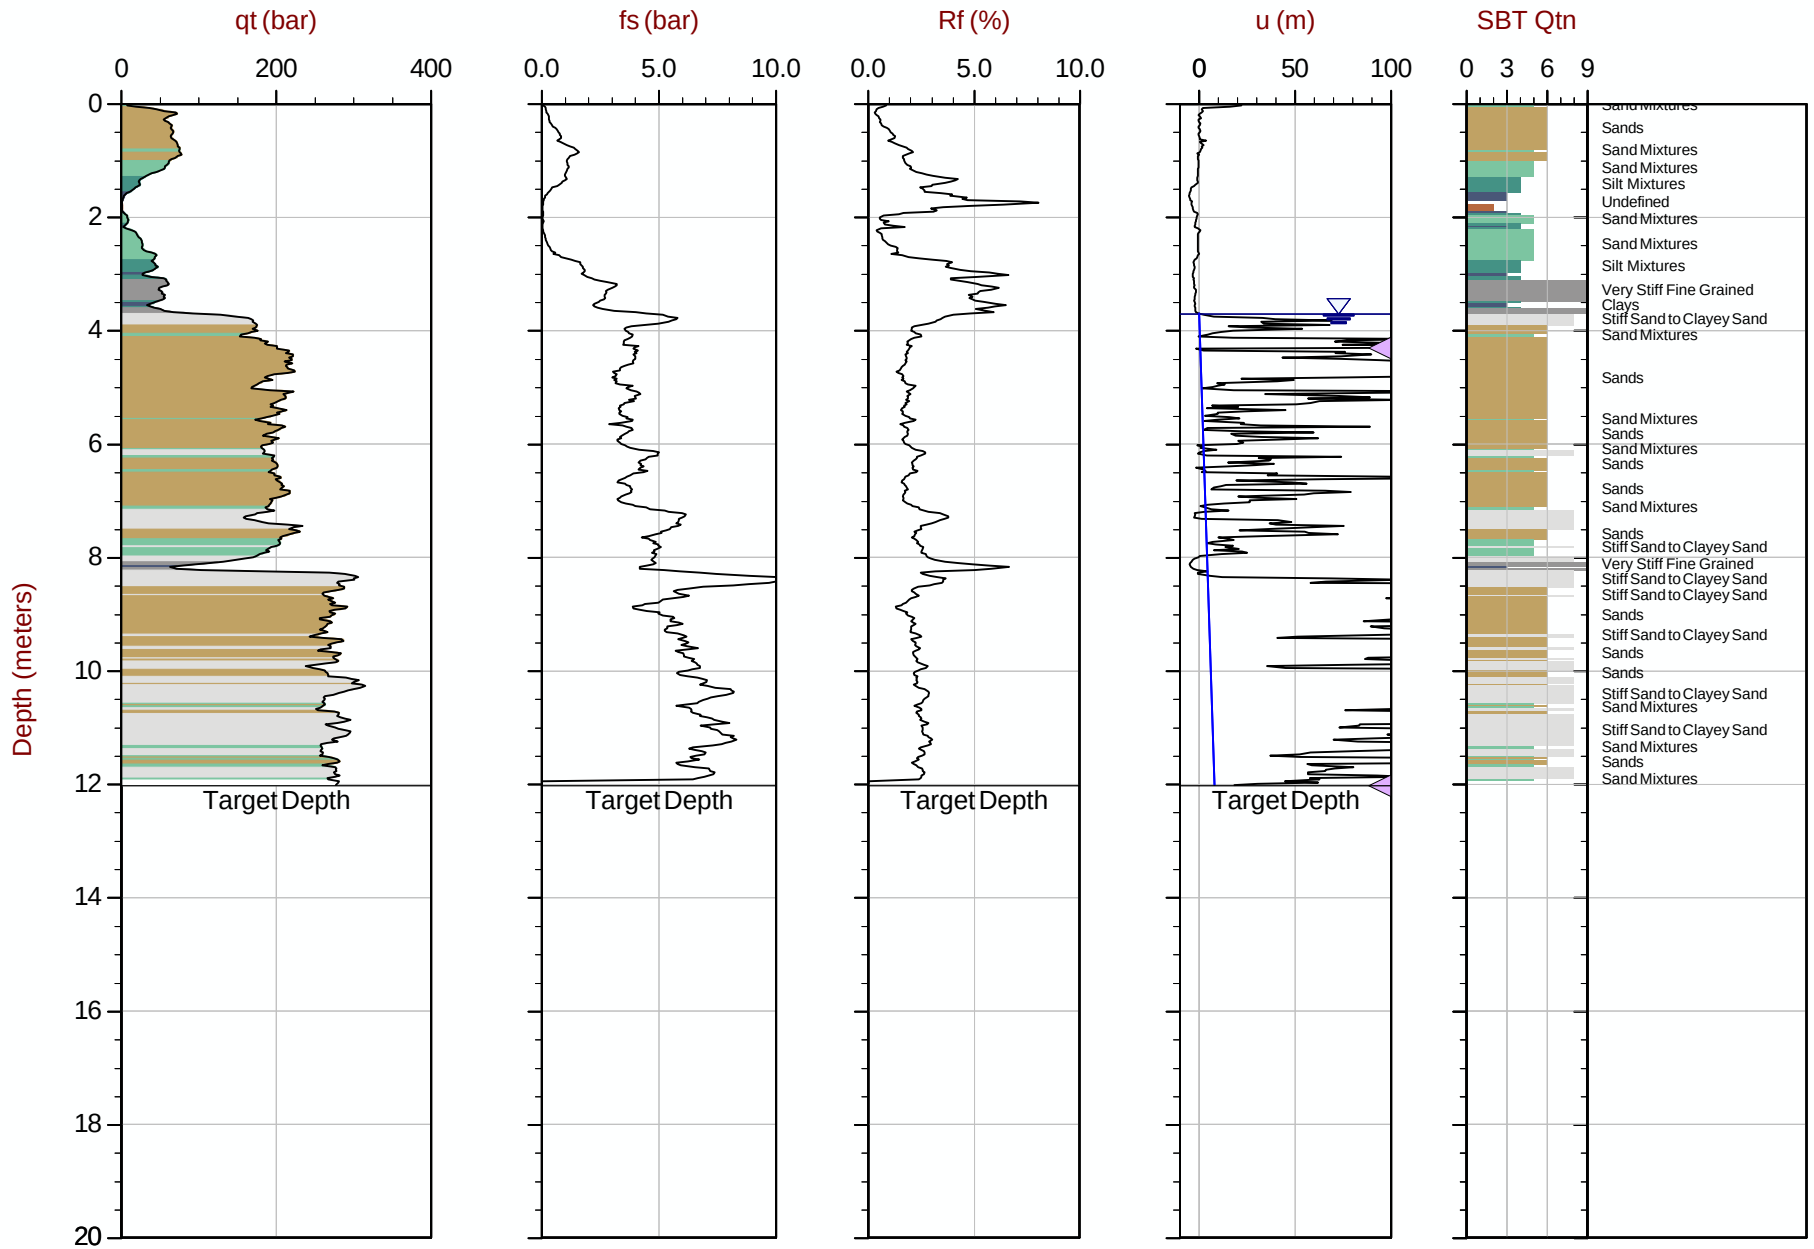

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT280.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610468m E: 416904m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 06:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT281
Cone: 854:T1500F15U35 Area= 15cm2

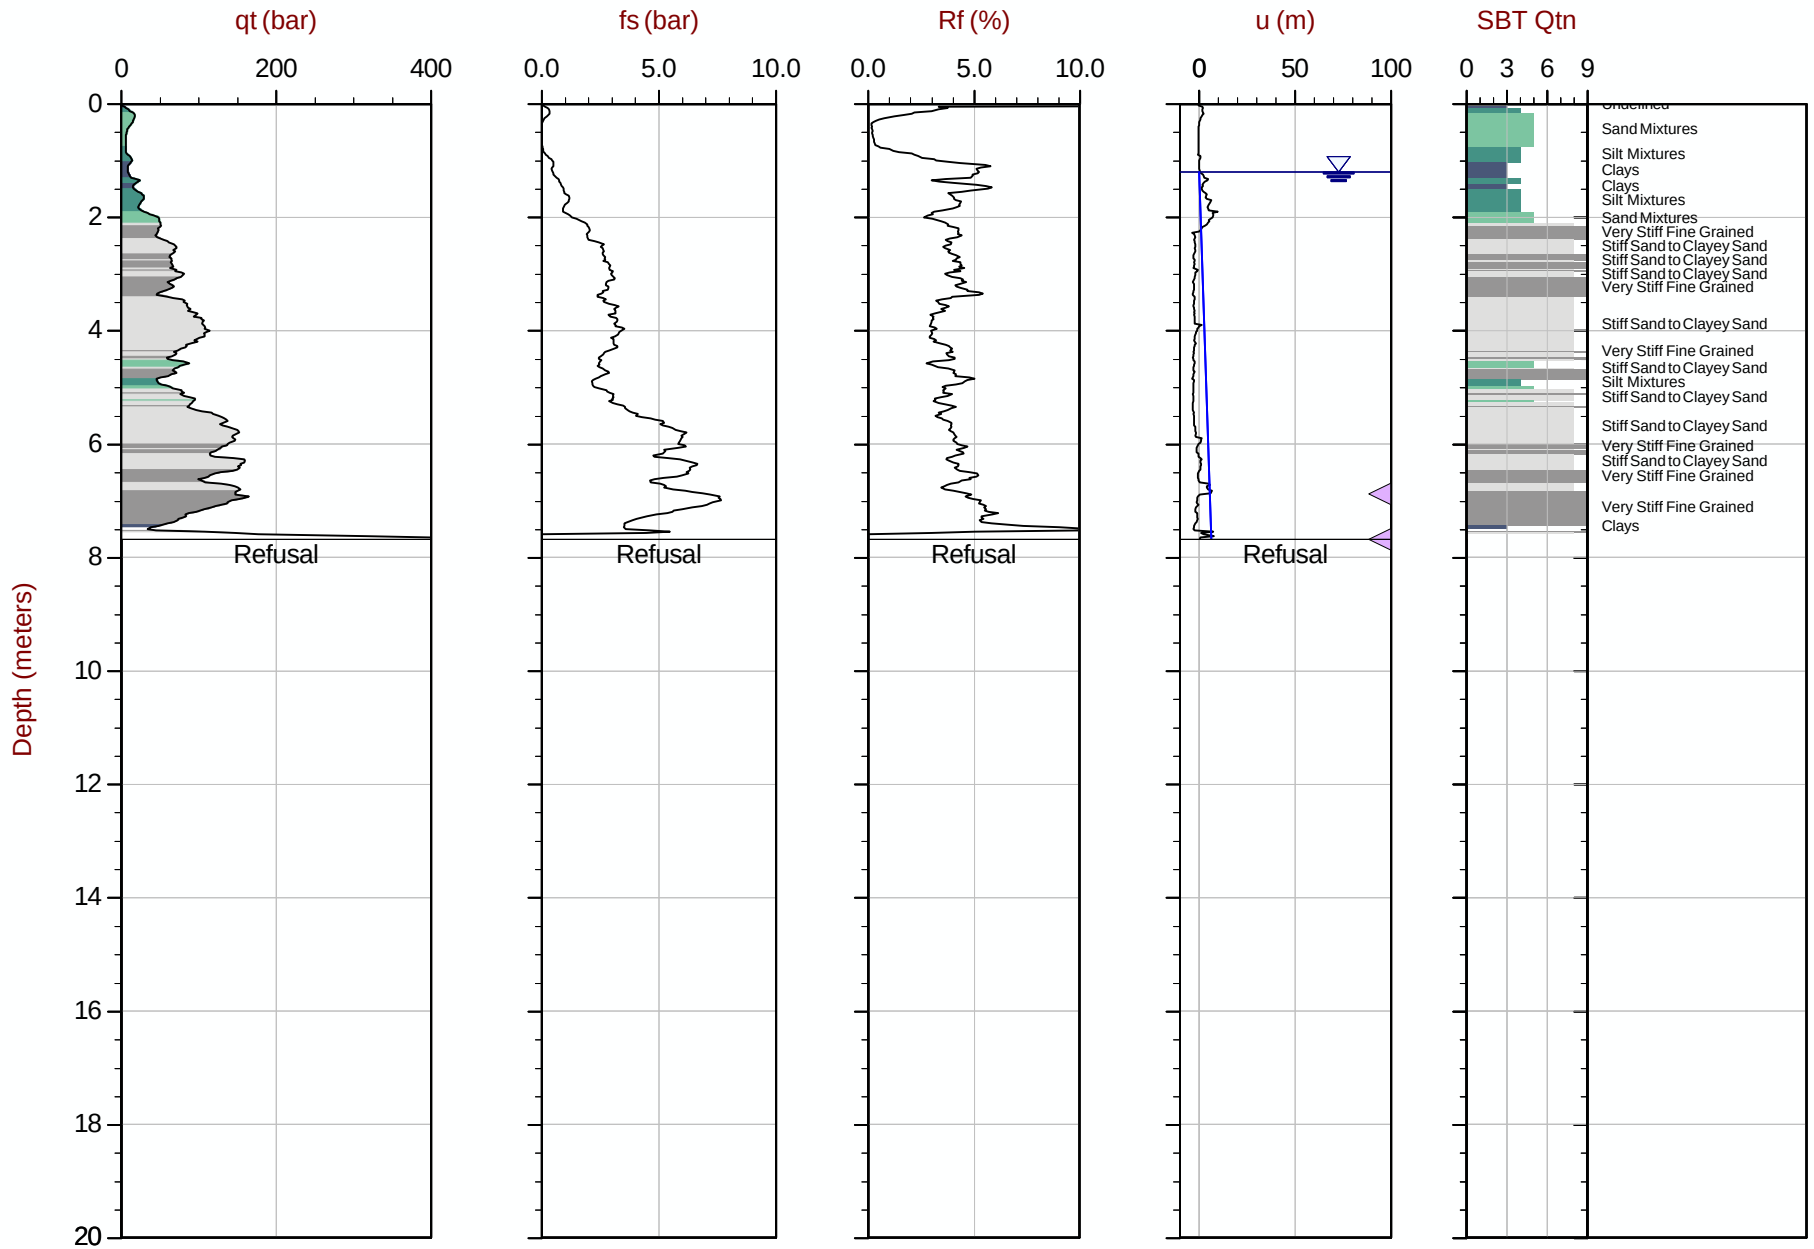

Max Depth: 7.675 m / 25.18 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT281.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610368m E: 416906m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 14:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT282
Cone: 854:T1500F15U35 Area= 15cm2

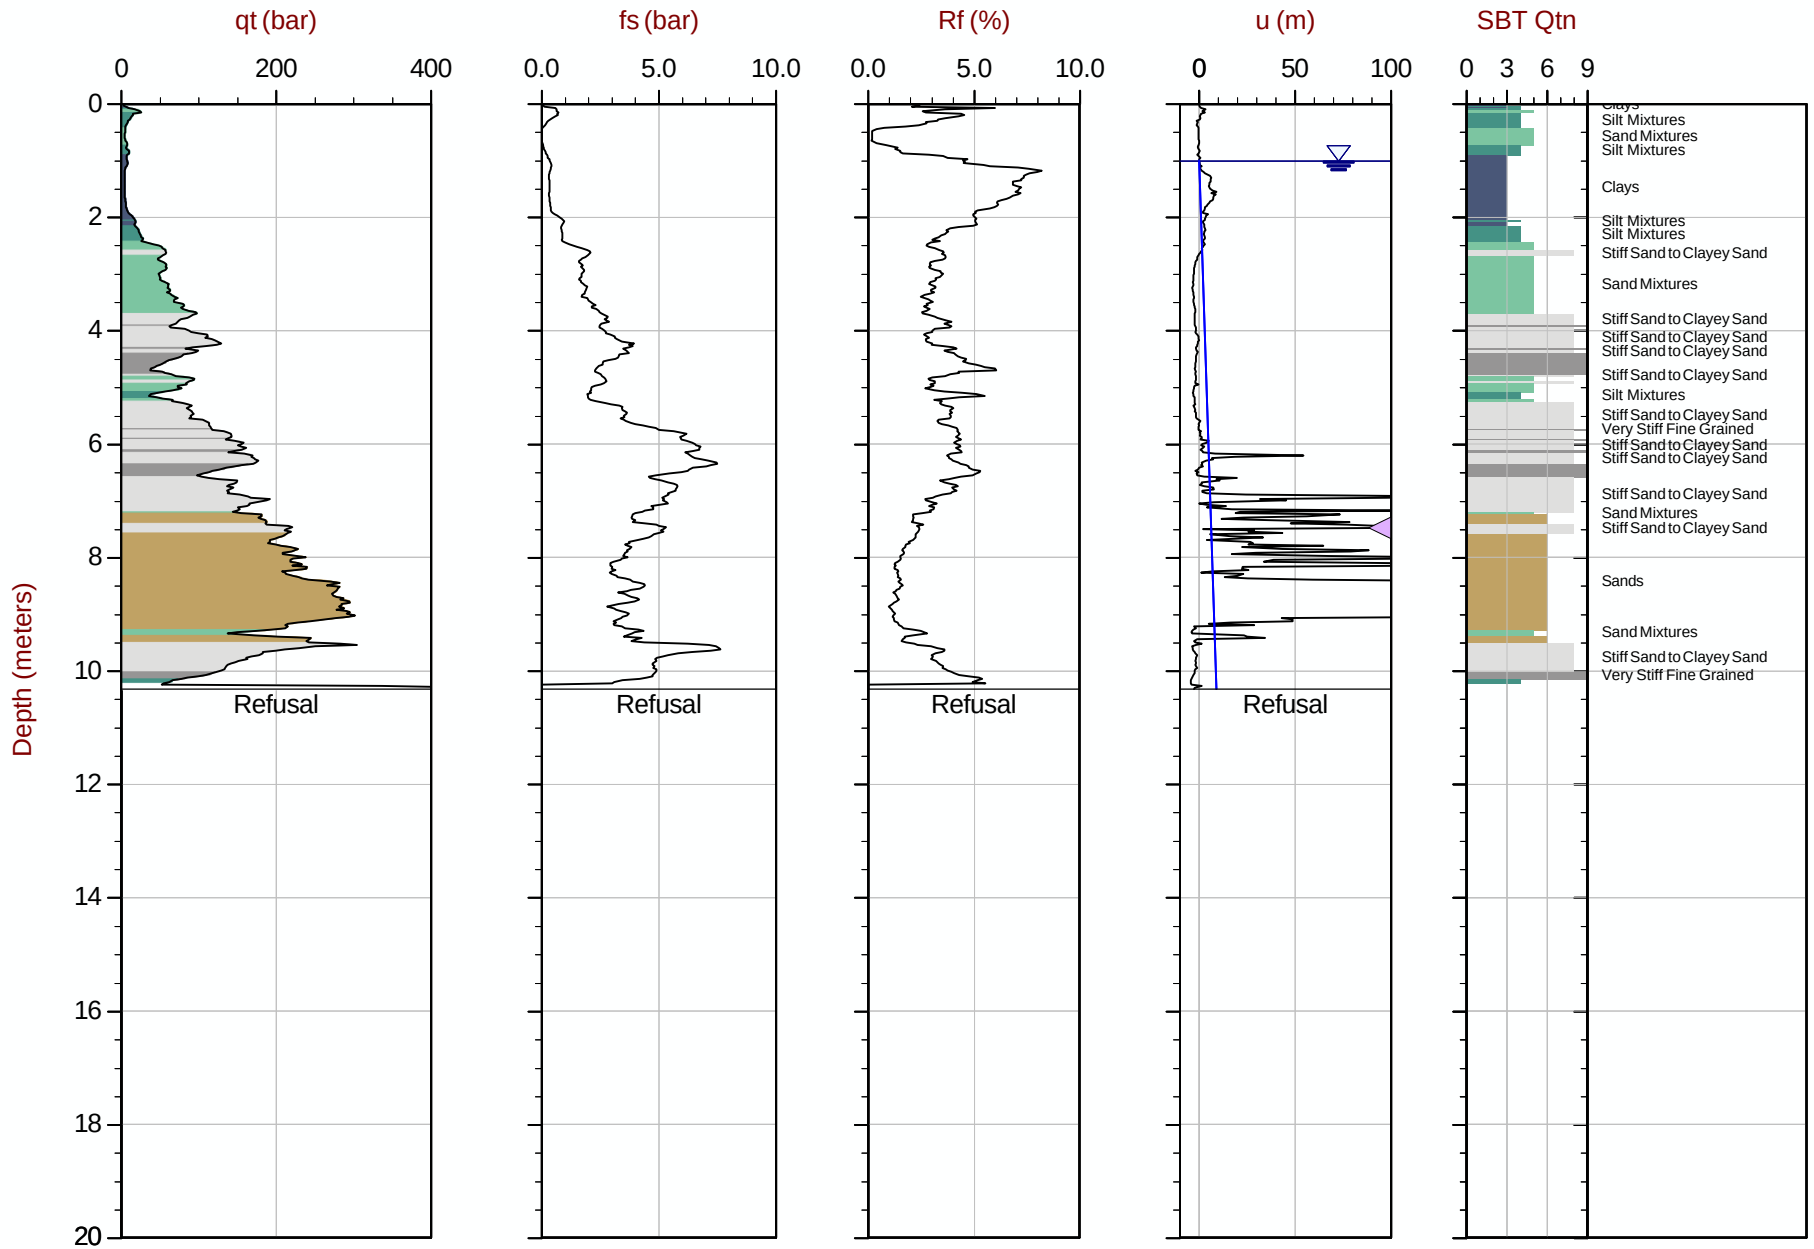

Max Depth: 10.325 m / 33.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT282.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610268m E: 416901m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 15:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT283
Cone: 854:T1500F15U35 Area= 15cm2

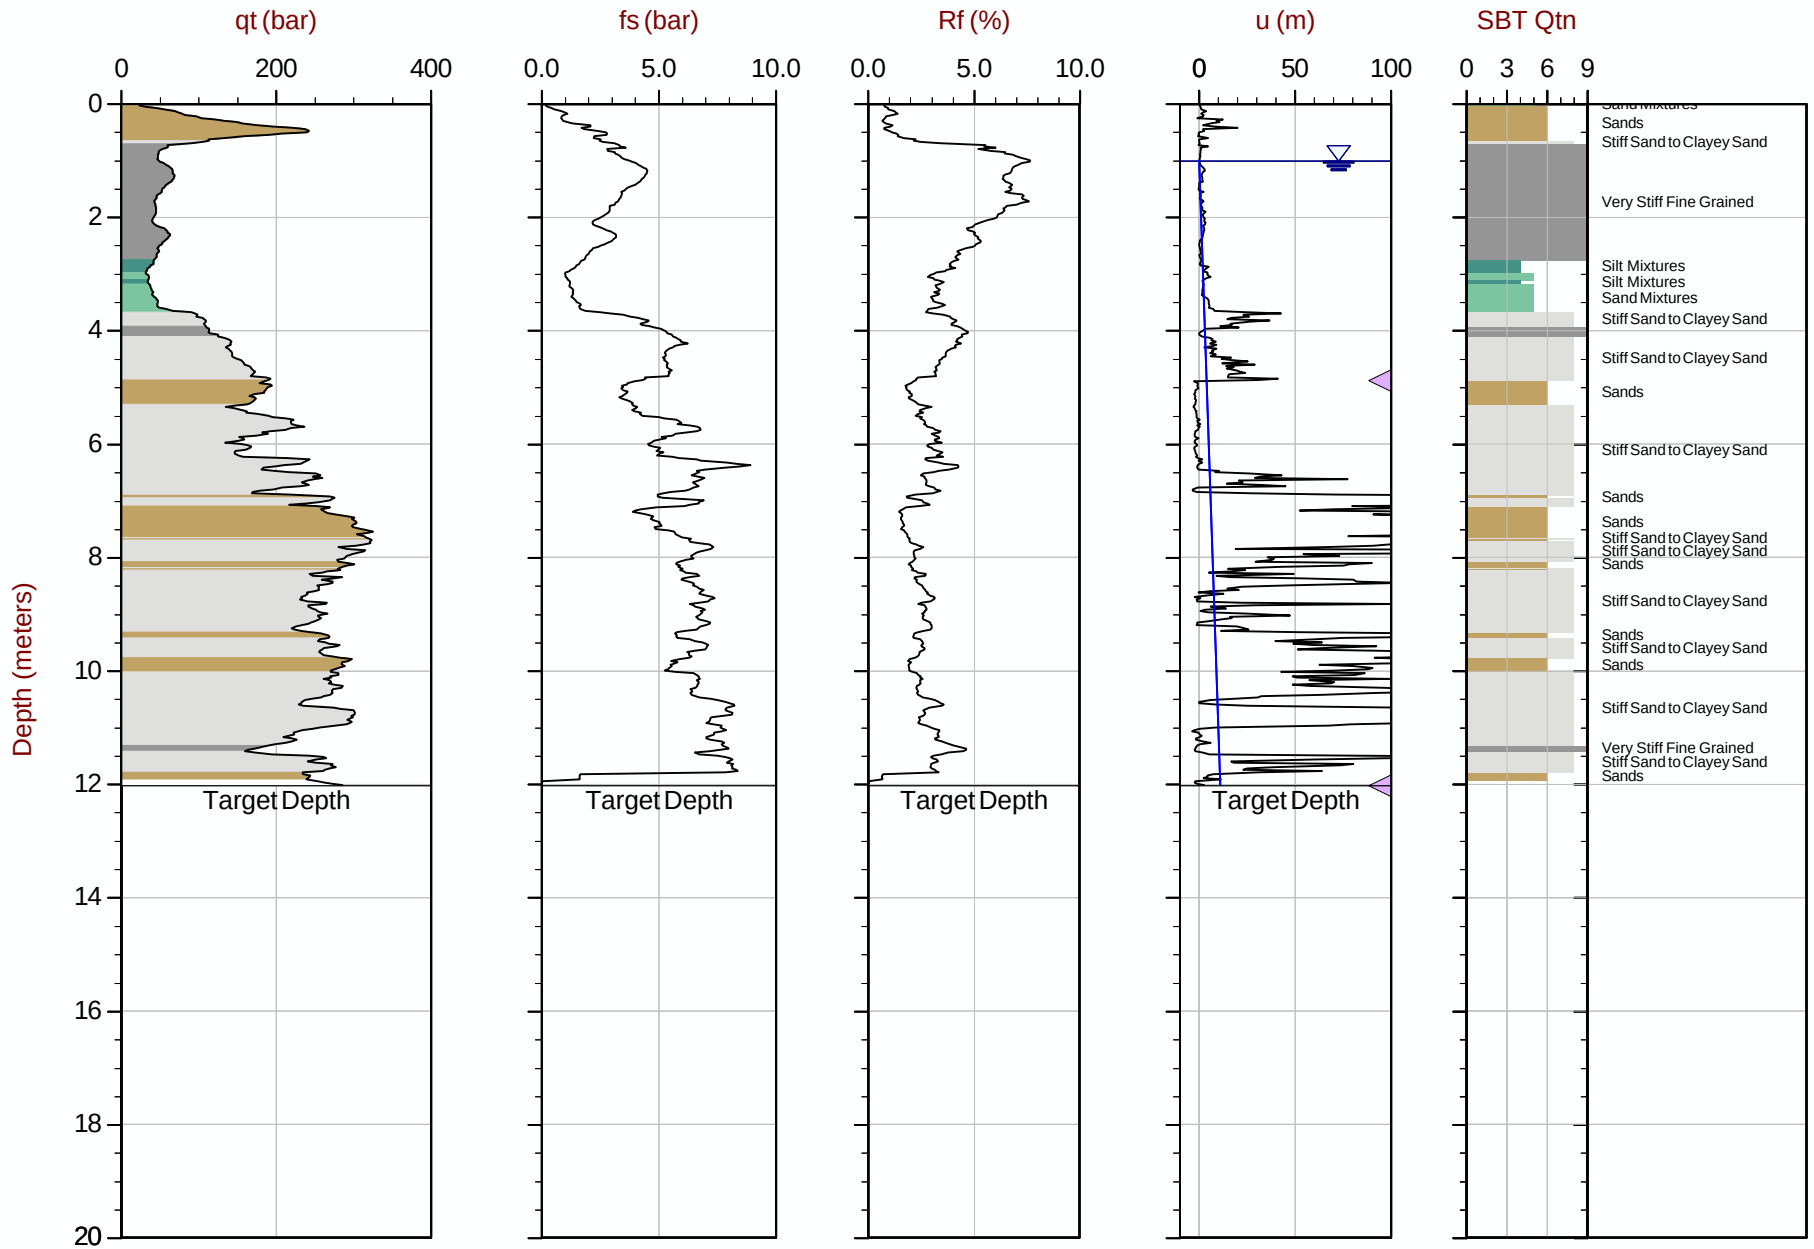

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT283.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610168m E: 416903m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 10:02
Site: Brooks, Alberta

Sounding: RCPT22-22CPT284
Cone: 854:T1500F15U35 Area= 15cm2

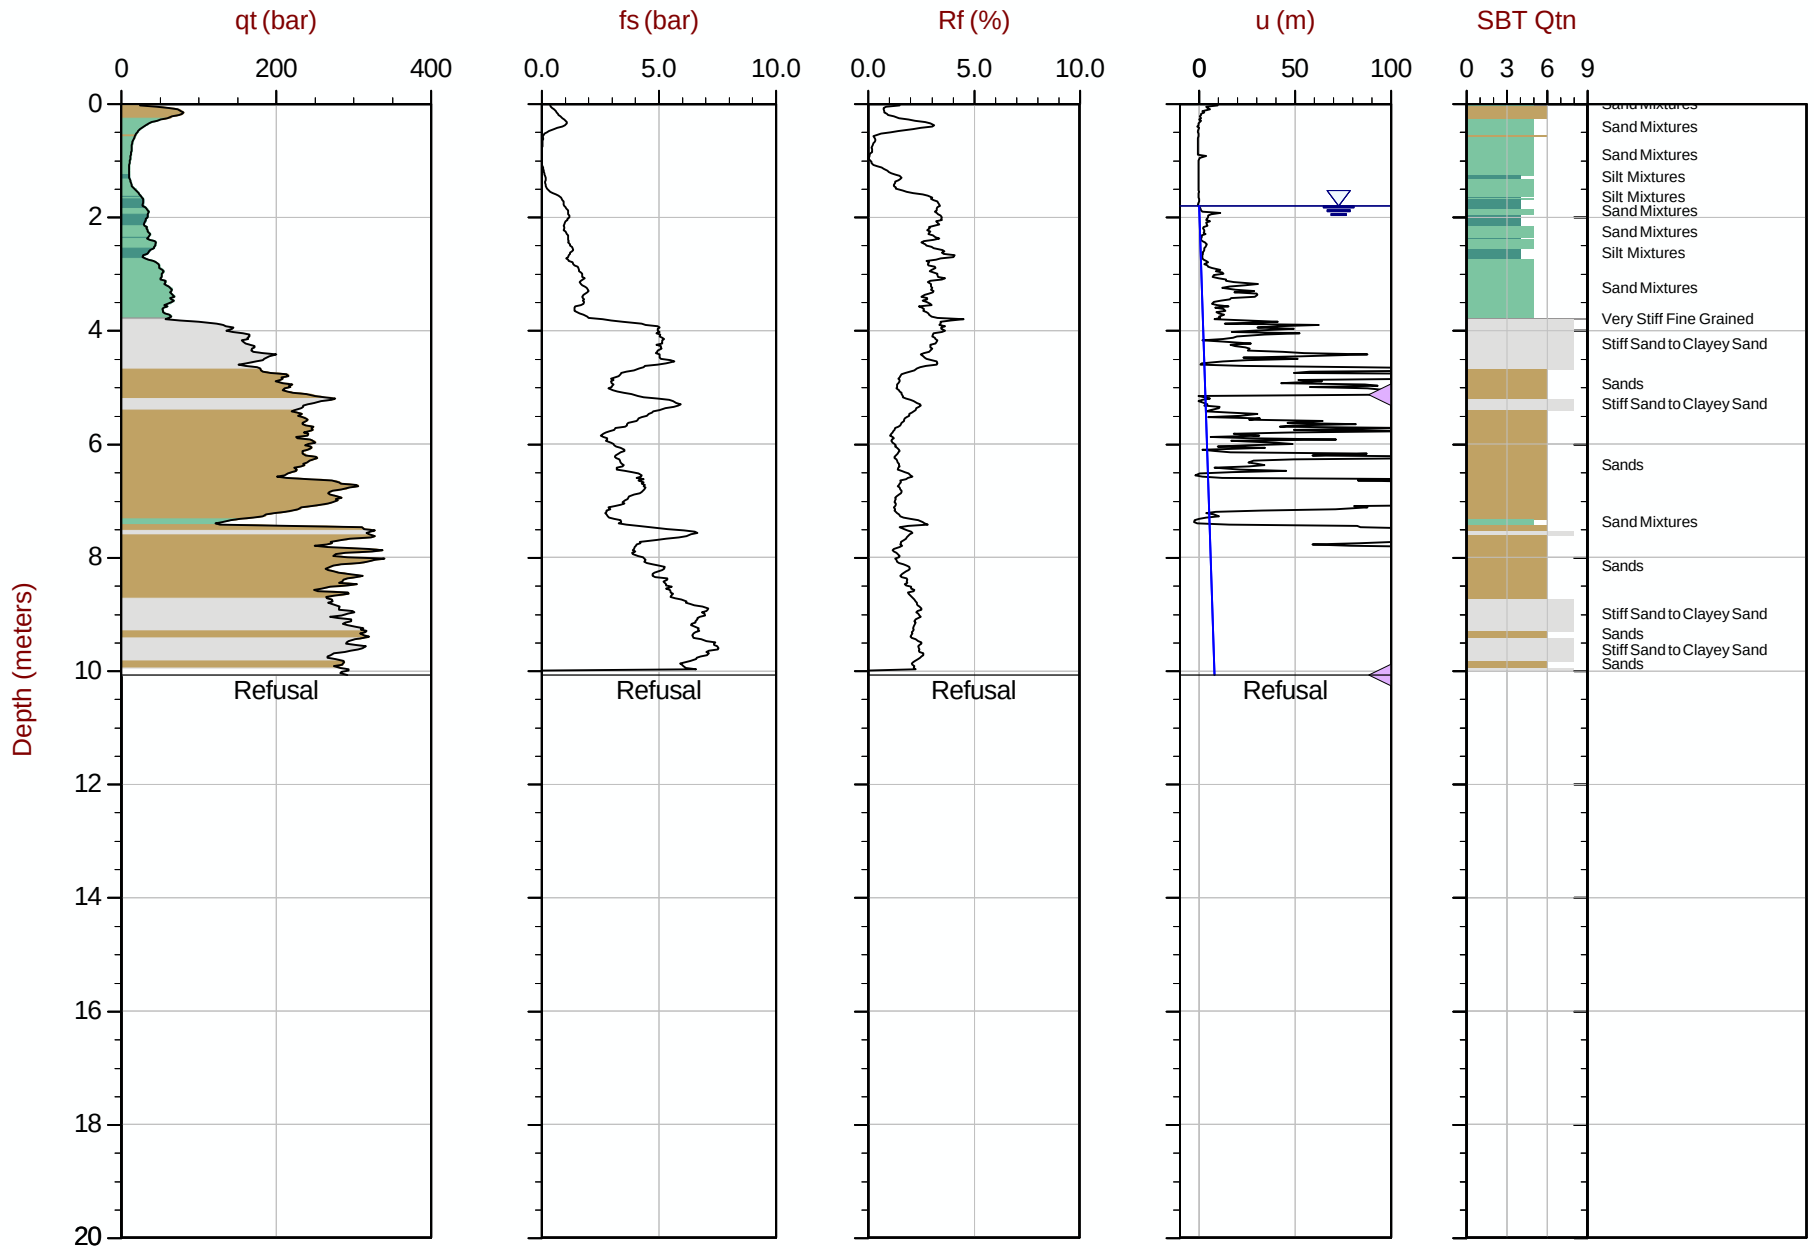

Max Depth: 10.075 m / 33.05 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT284.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610070m E: 416898m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT285
Cone: 854:T1500F15U35 Area= 15cm2

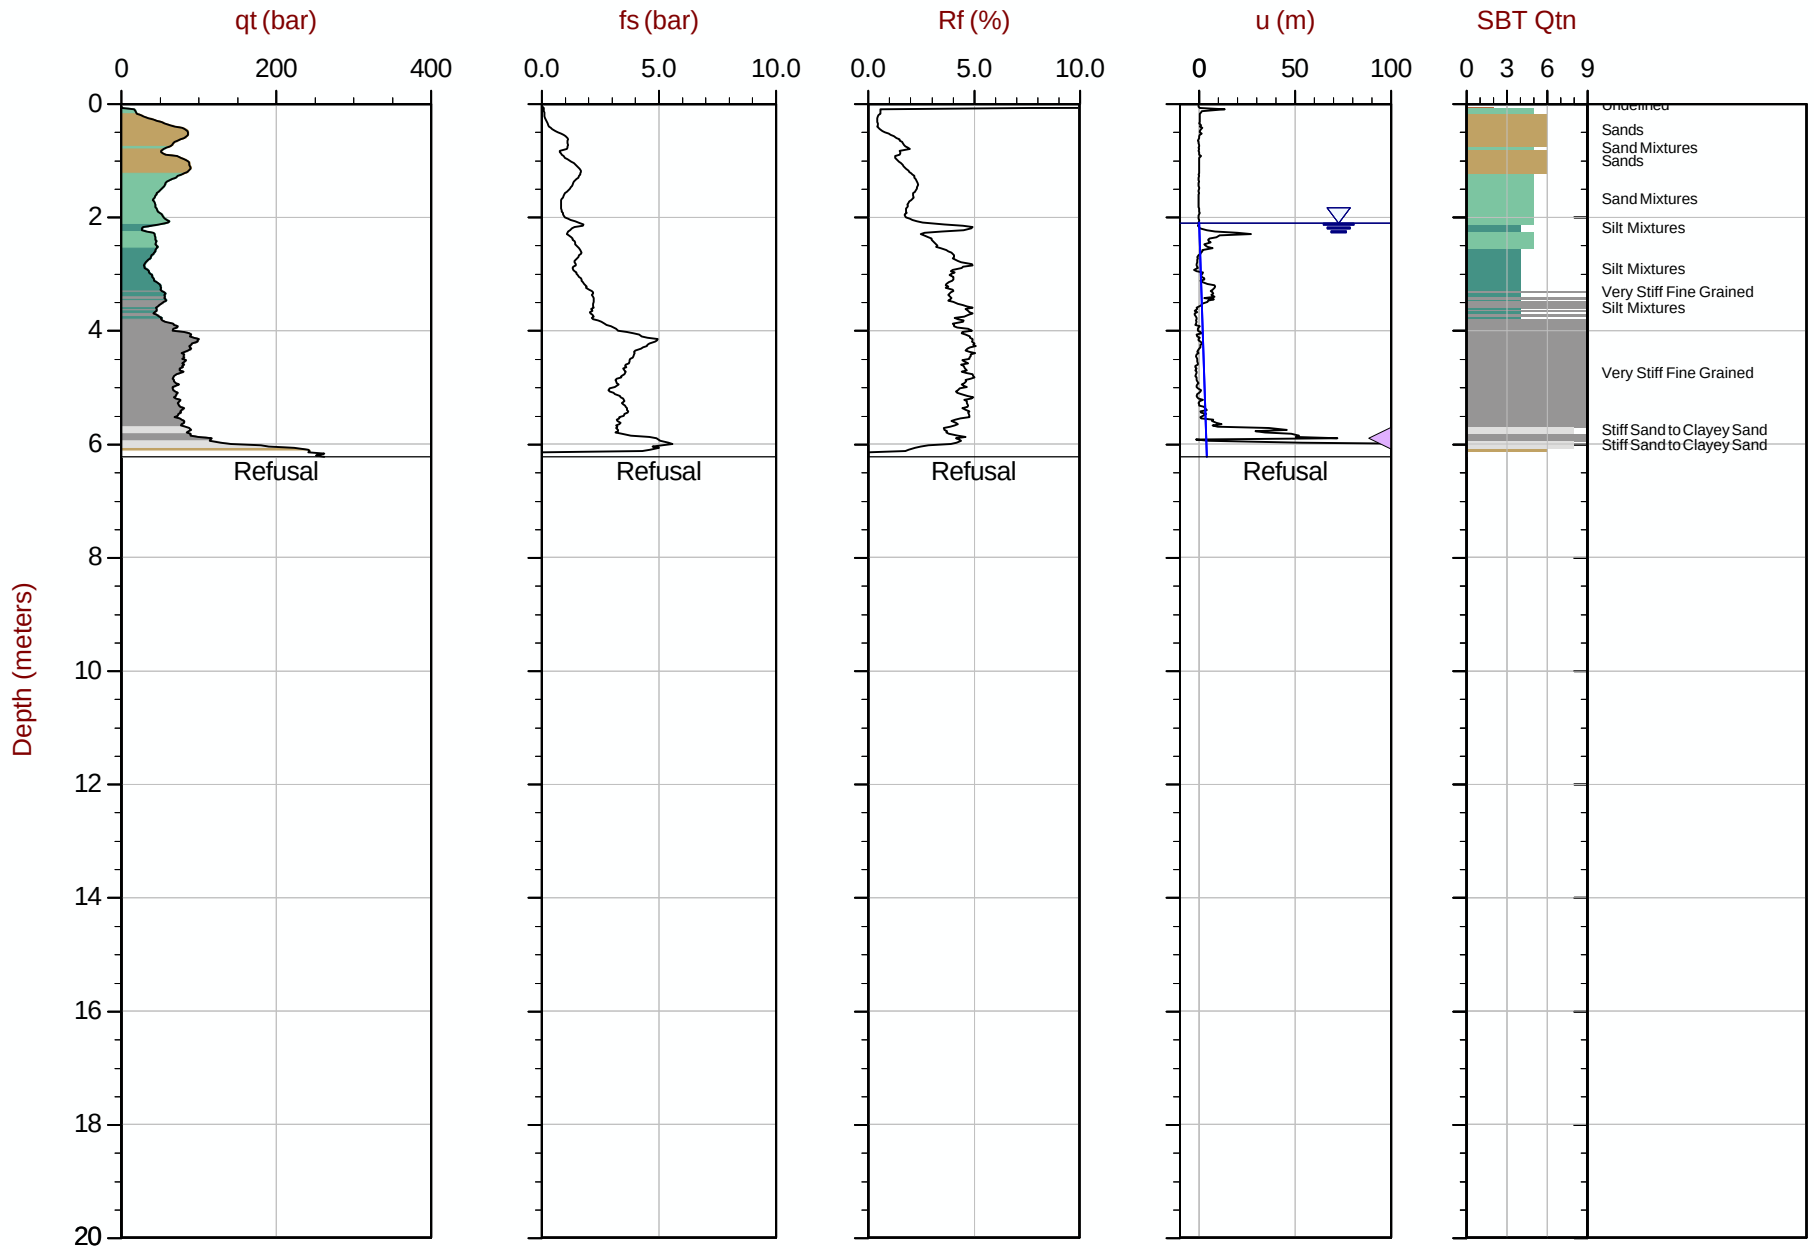

Max Depth: 6.225 m / 20.42 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT285.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609970m E: 416893m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 09:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT286
Cone: 854:T1500F15U35 Area= 15cm2

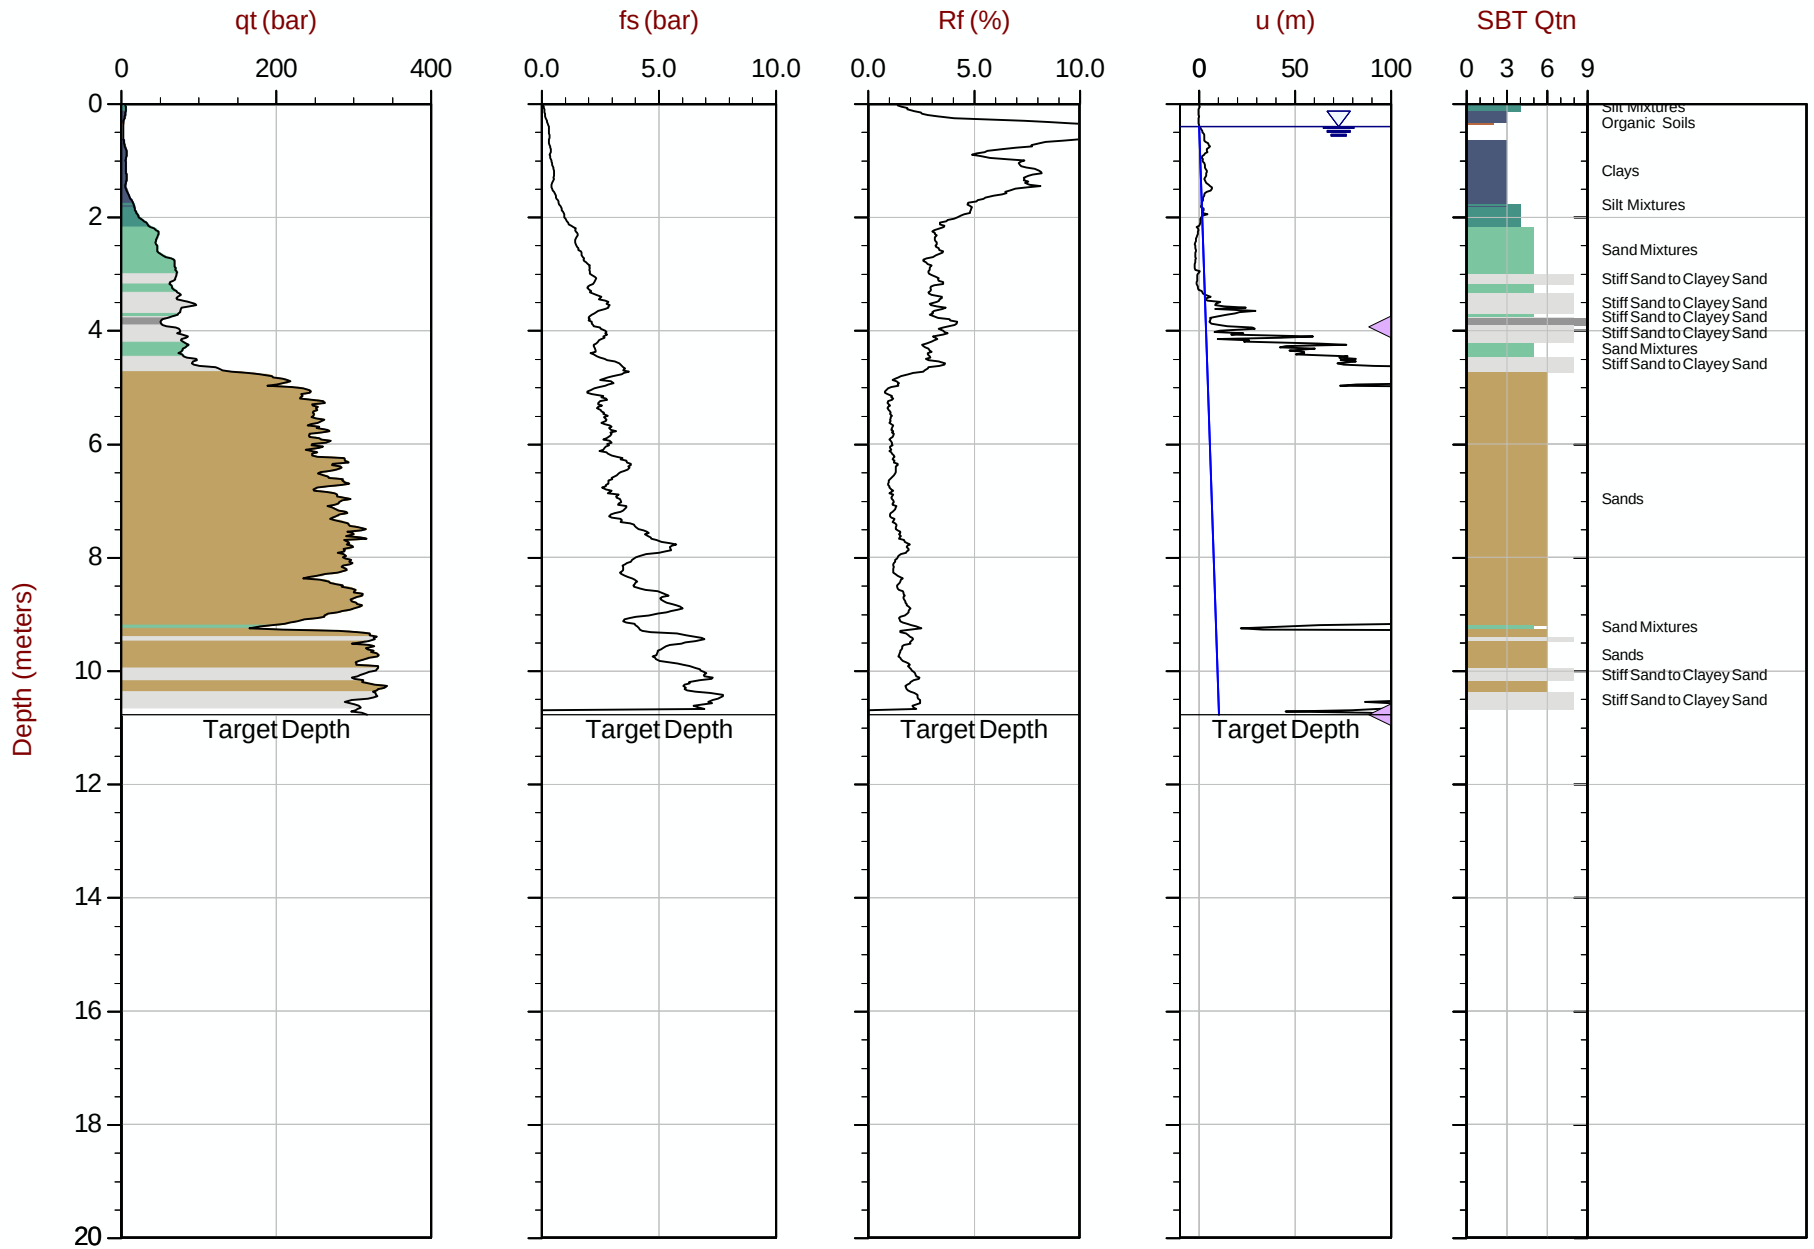

Max Depth: 10.775 m / 35.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT286.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609870m E: 416898m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 12:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT287
Cone: 854:T1500F15U35 Area= 15cm2

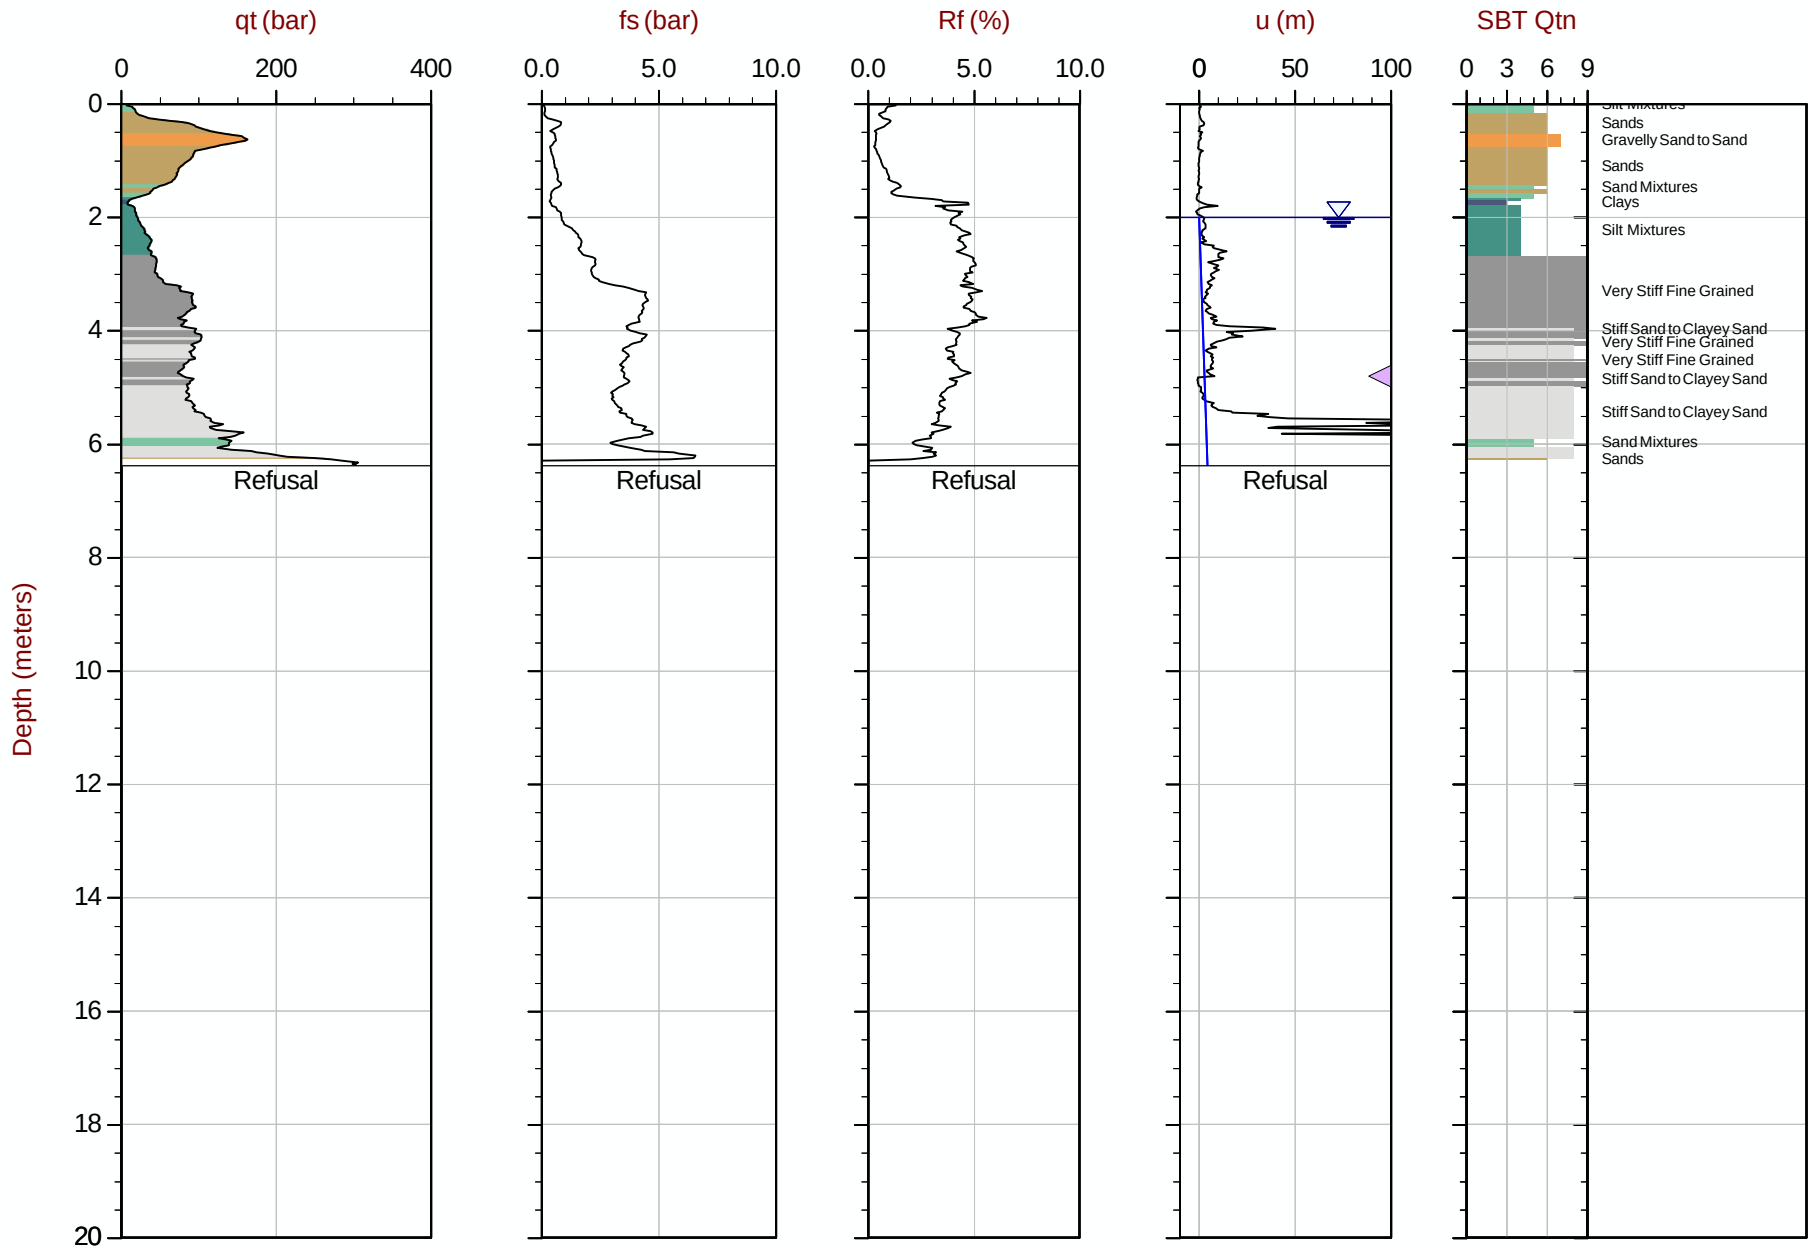

Max Depth: 6.375 m / 20.92 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22_22CPT287.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609769m E: 416895m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 14:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT288
Cone: 854:T1500F15U35 Area= 15cm2

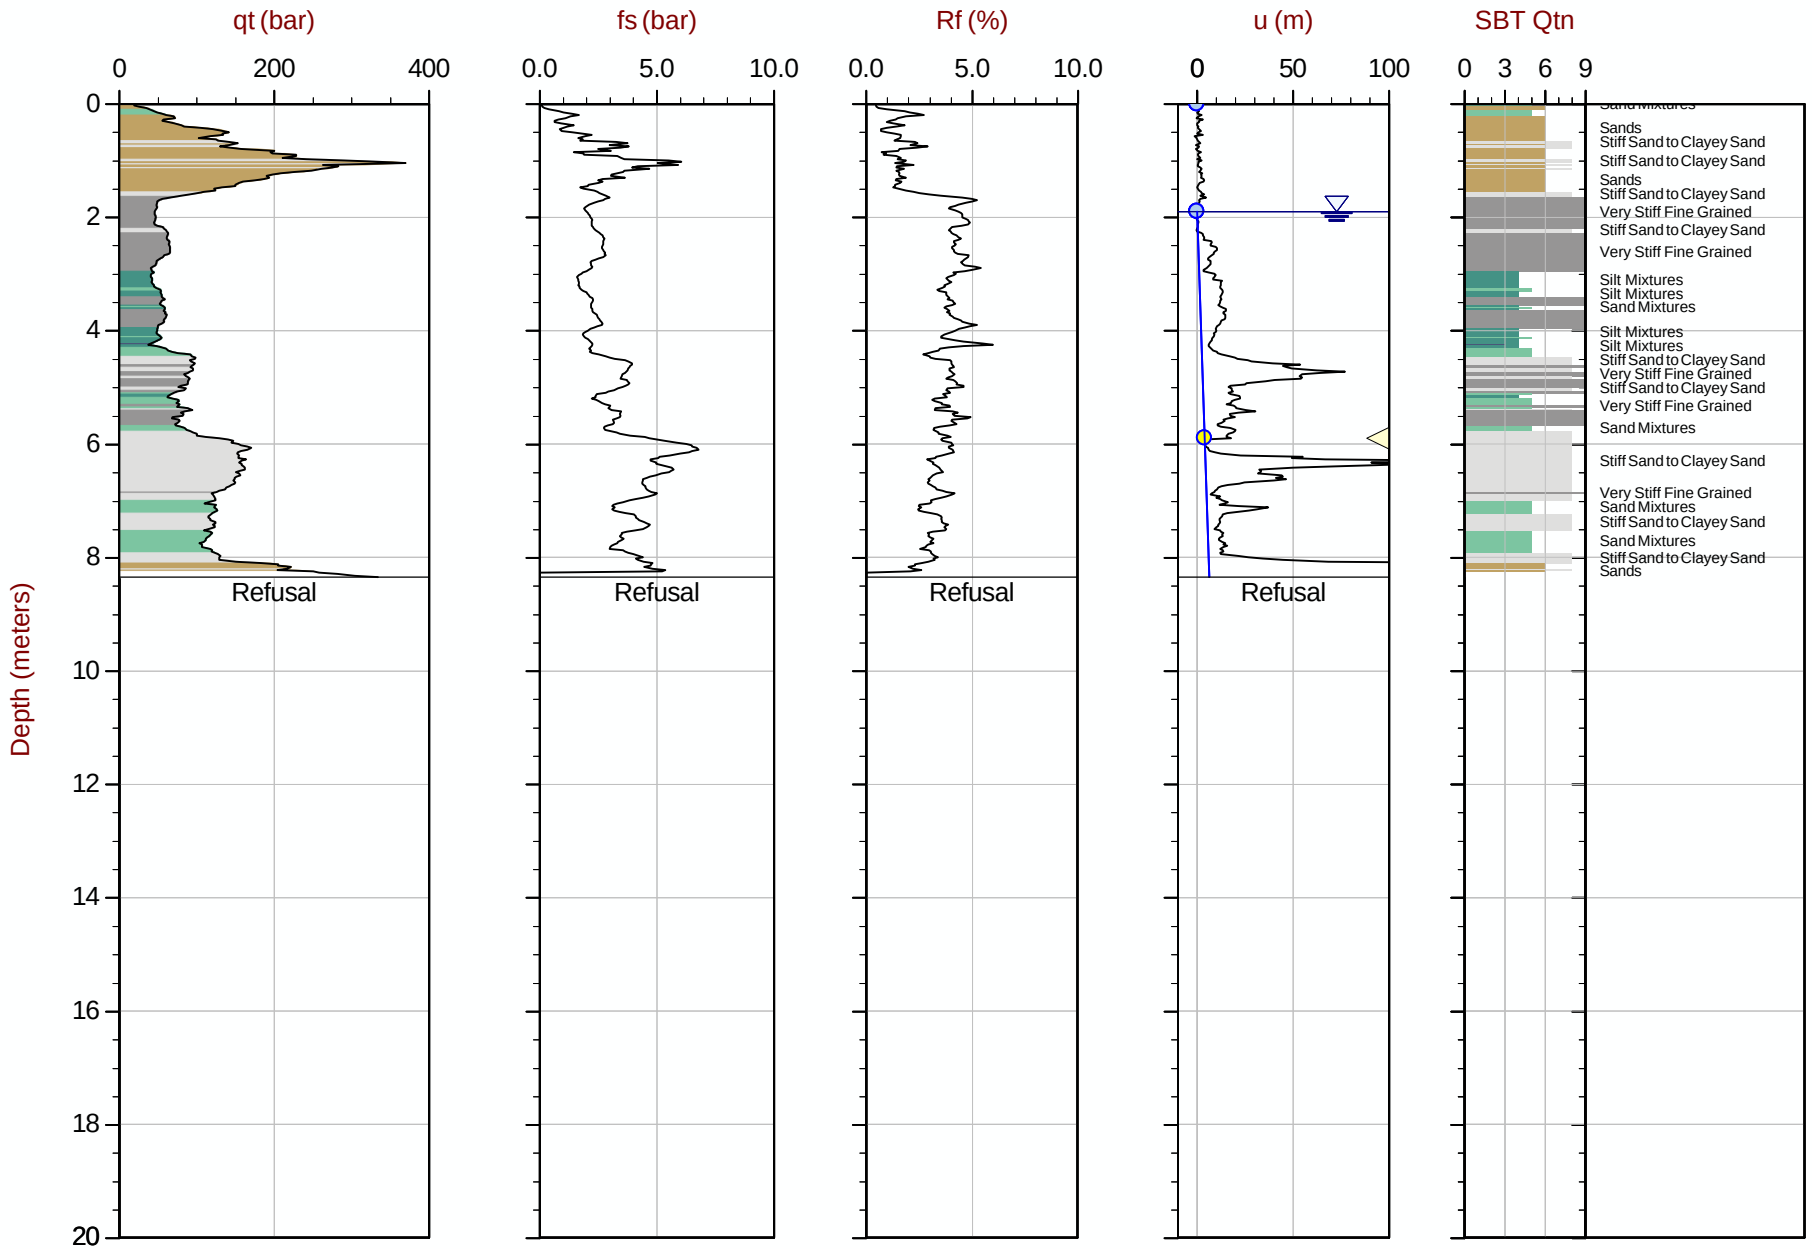

Max Depth: 8.350 m / 27.39 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT288.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609655m E: 416872m Elev: 768.551m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 08:18
Site: Brooks, Alberta

Sounding: RCPT22-22CPT300
Cone: 854:T1500F15U35 Area= 15cm2

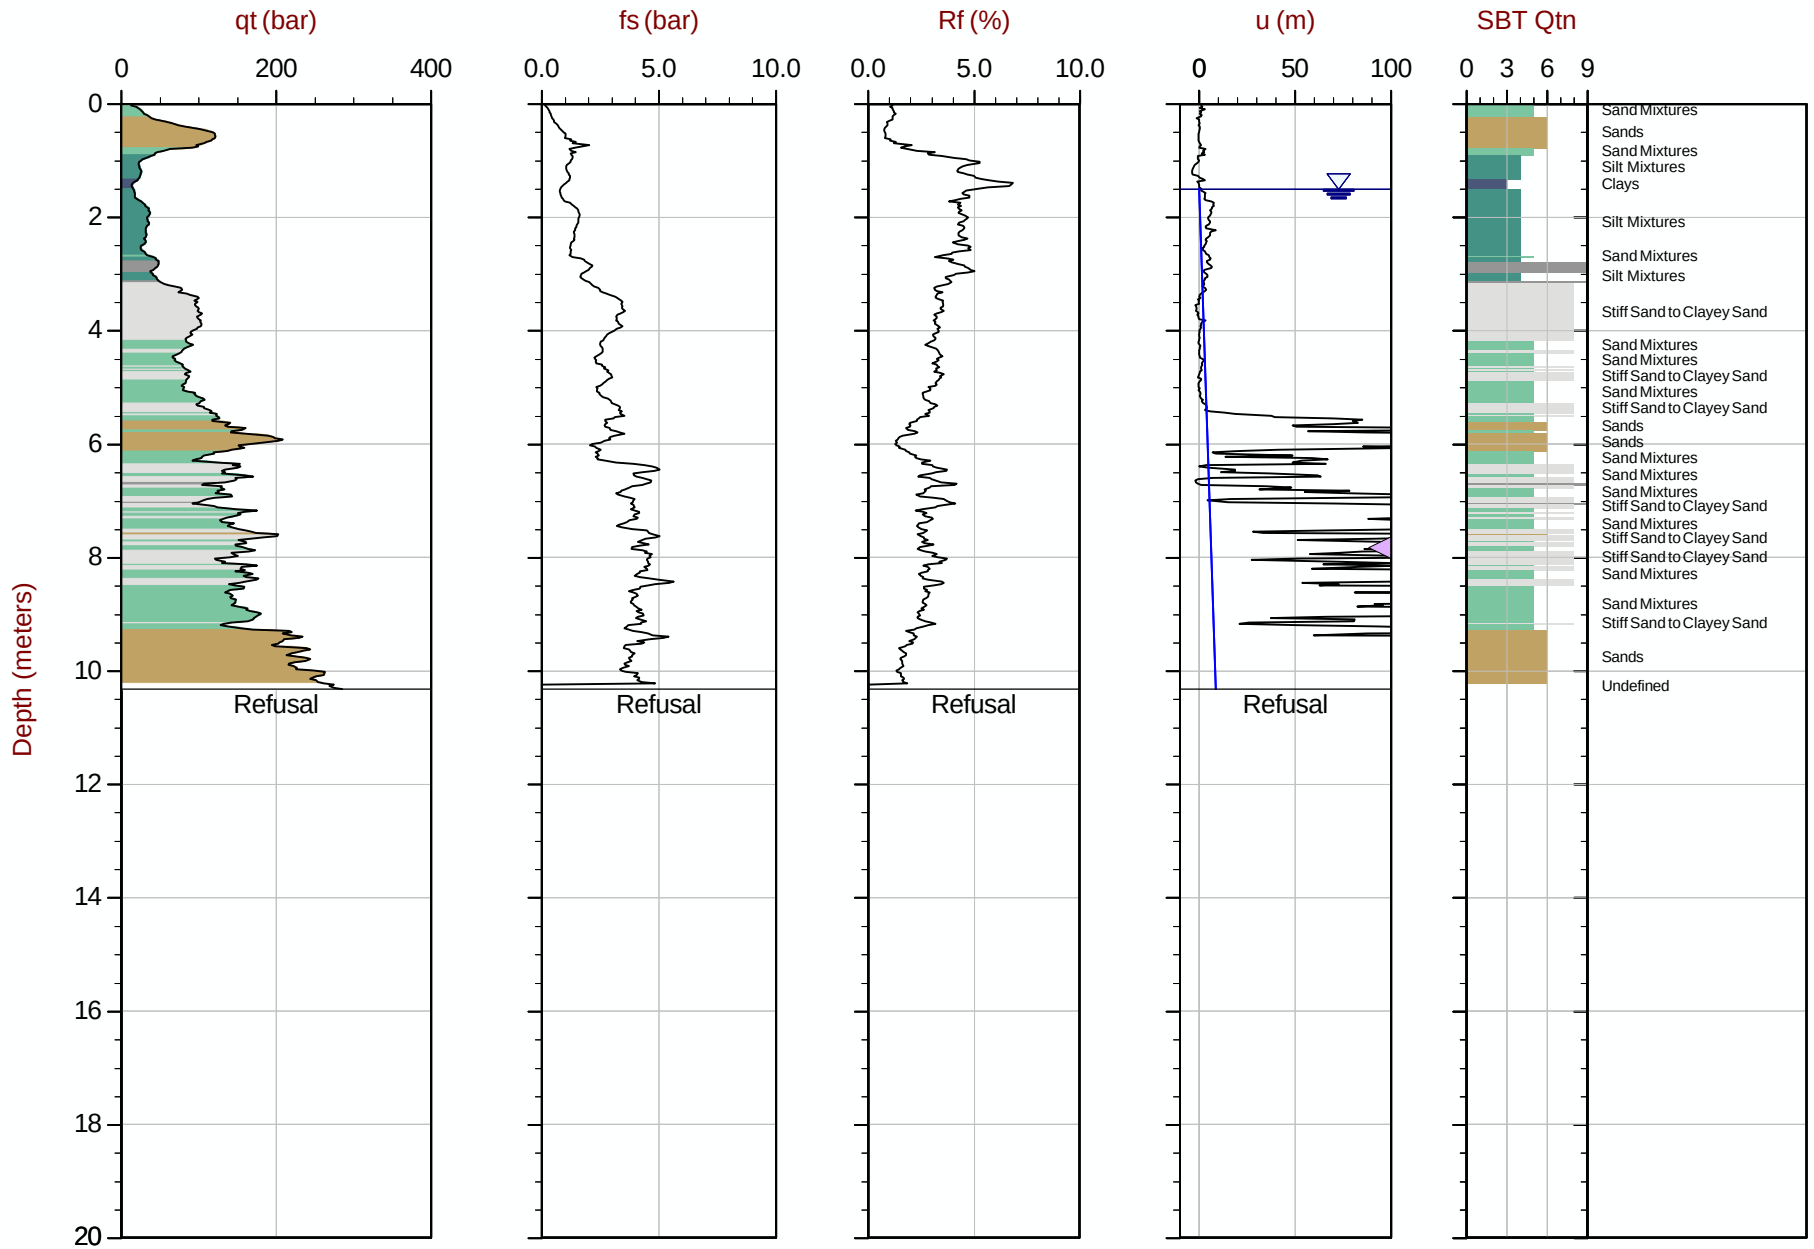

Max Depth: 10.325 m / 33.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT300.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609541m E: 416733m Elev: 768.186m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 10:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT301
Cone: 854:T1500F15U35 Area= 15cm2

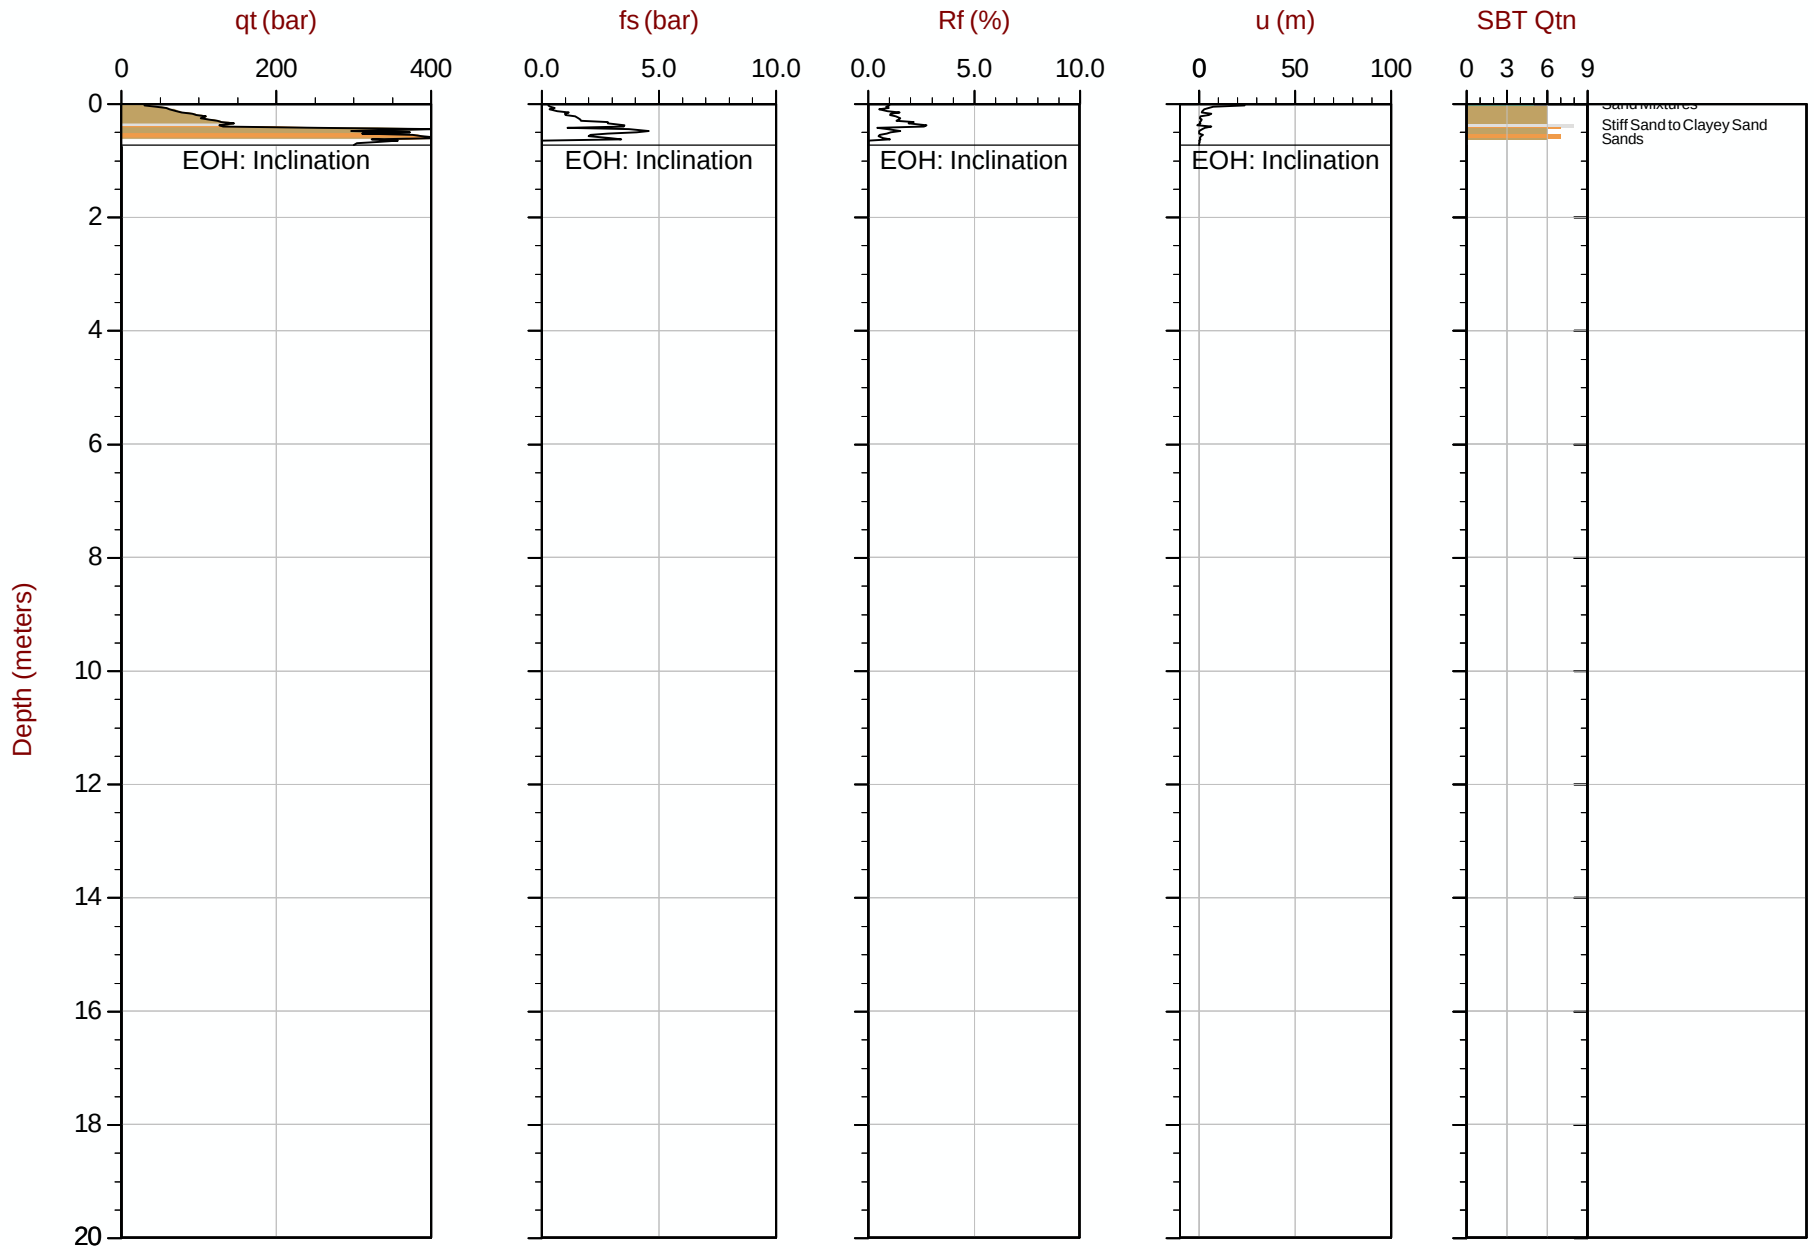

Max Depth: 0.725 m / 2.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT301.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609514m E: 416692m Elev: 769.445m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 10:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT301B
Cone: 854:T1500F15U35 Area= 15cm2

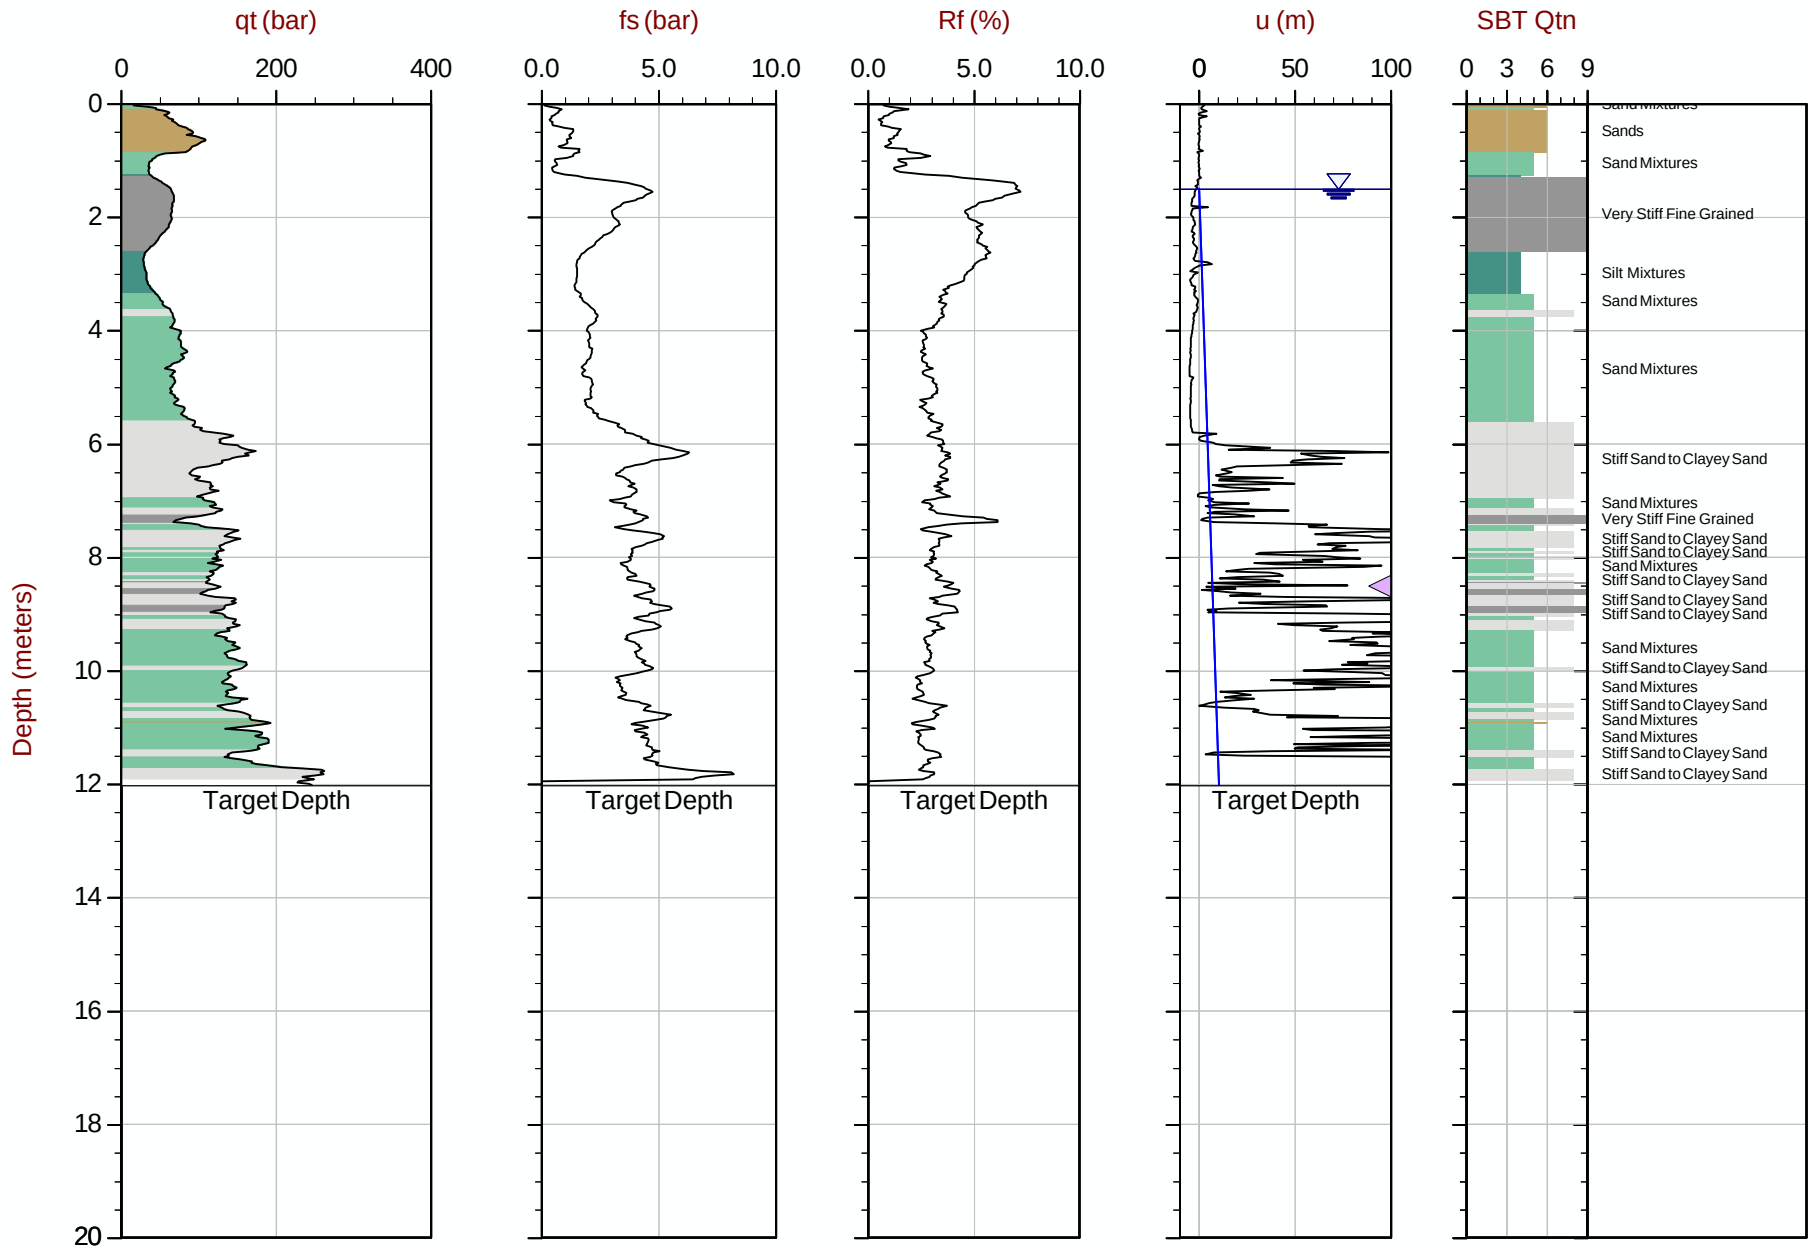

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT301B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609511m E: 416692m Elev: 769.400m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 11:25
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT302
Cone: 854:T1500F15U35 Area= 15cm2

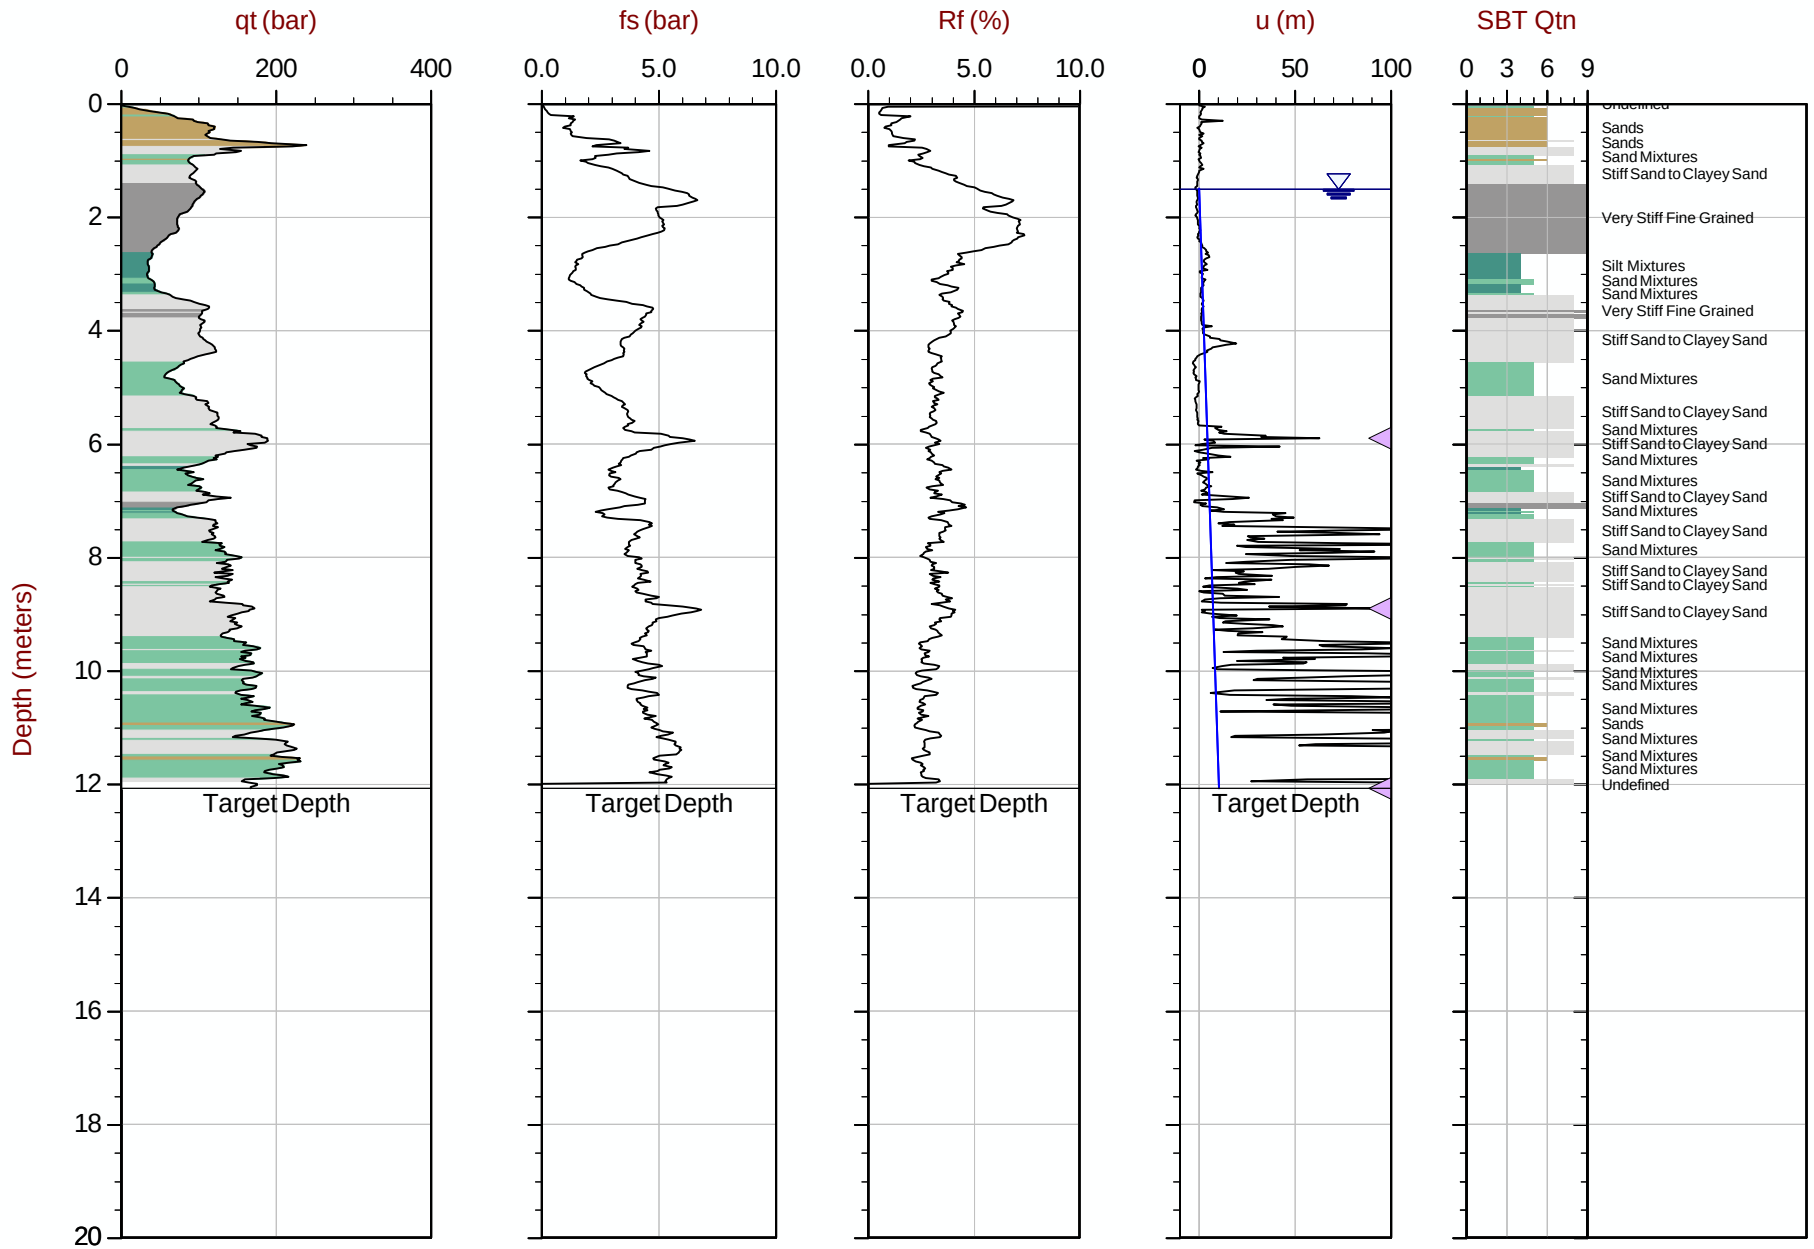

Max Depth: 12.075 m / 39.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT302.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609492m E: 416646m Elev: 769.017m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT303
Cone: 854:T1500F15U35 Area= 15cm2

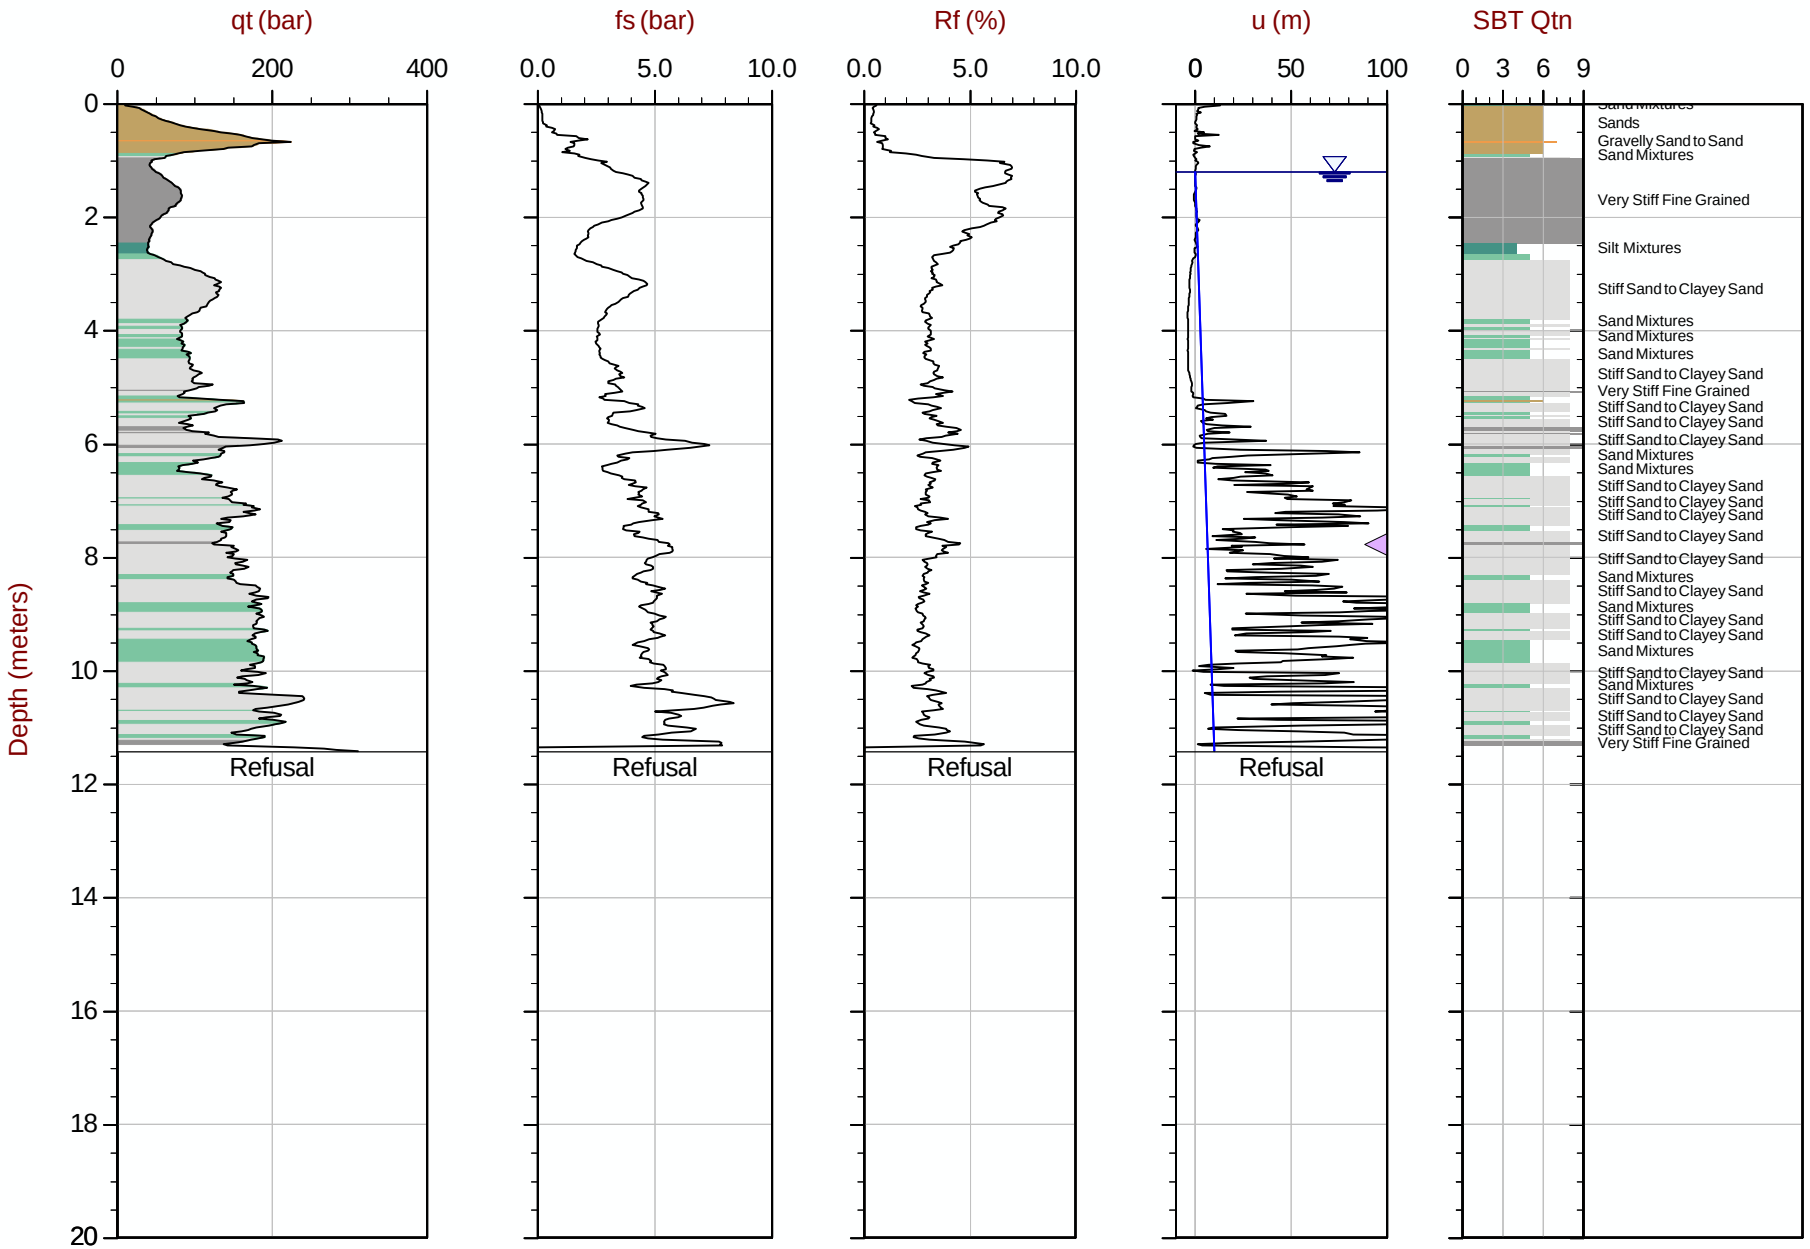

Max Depth: 11.425 m / 37.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT303.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609479m E: 416597m Elev: 768.788m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 14:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT304
Cone: 854:T1500F15U35 Area= 15cm2

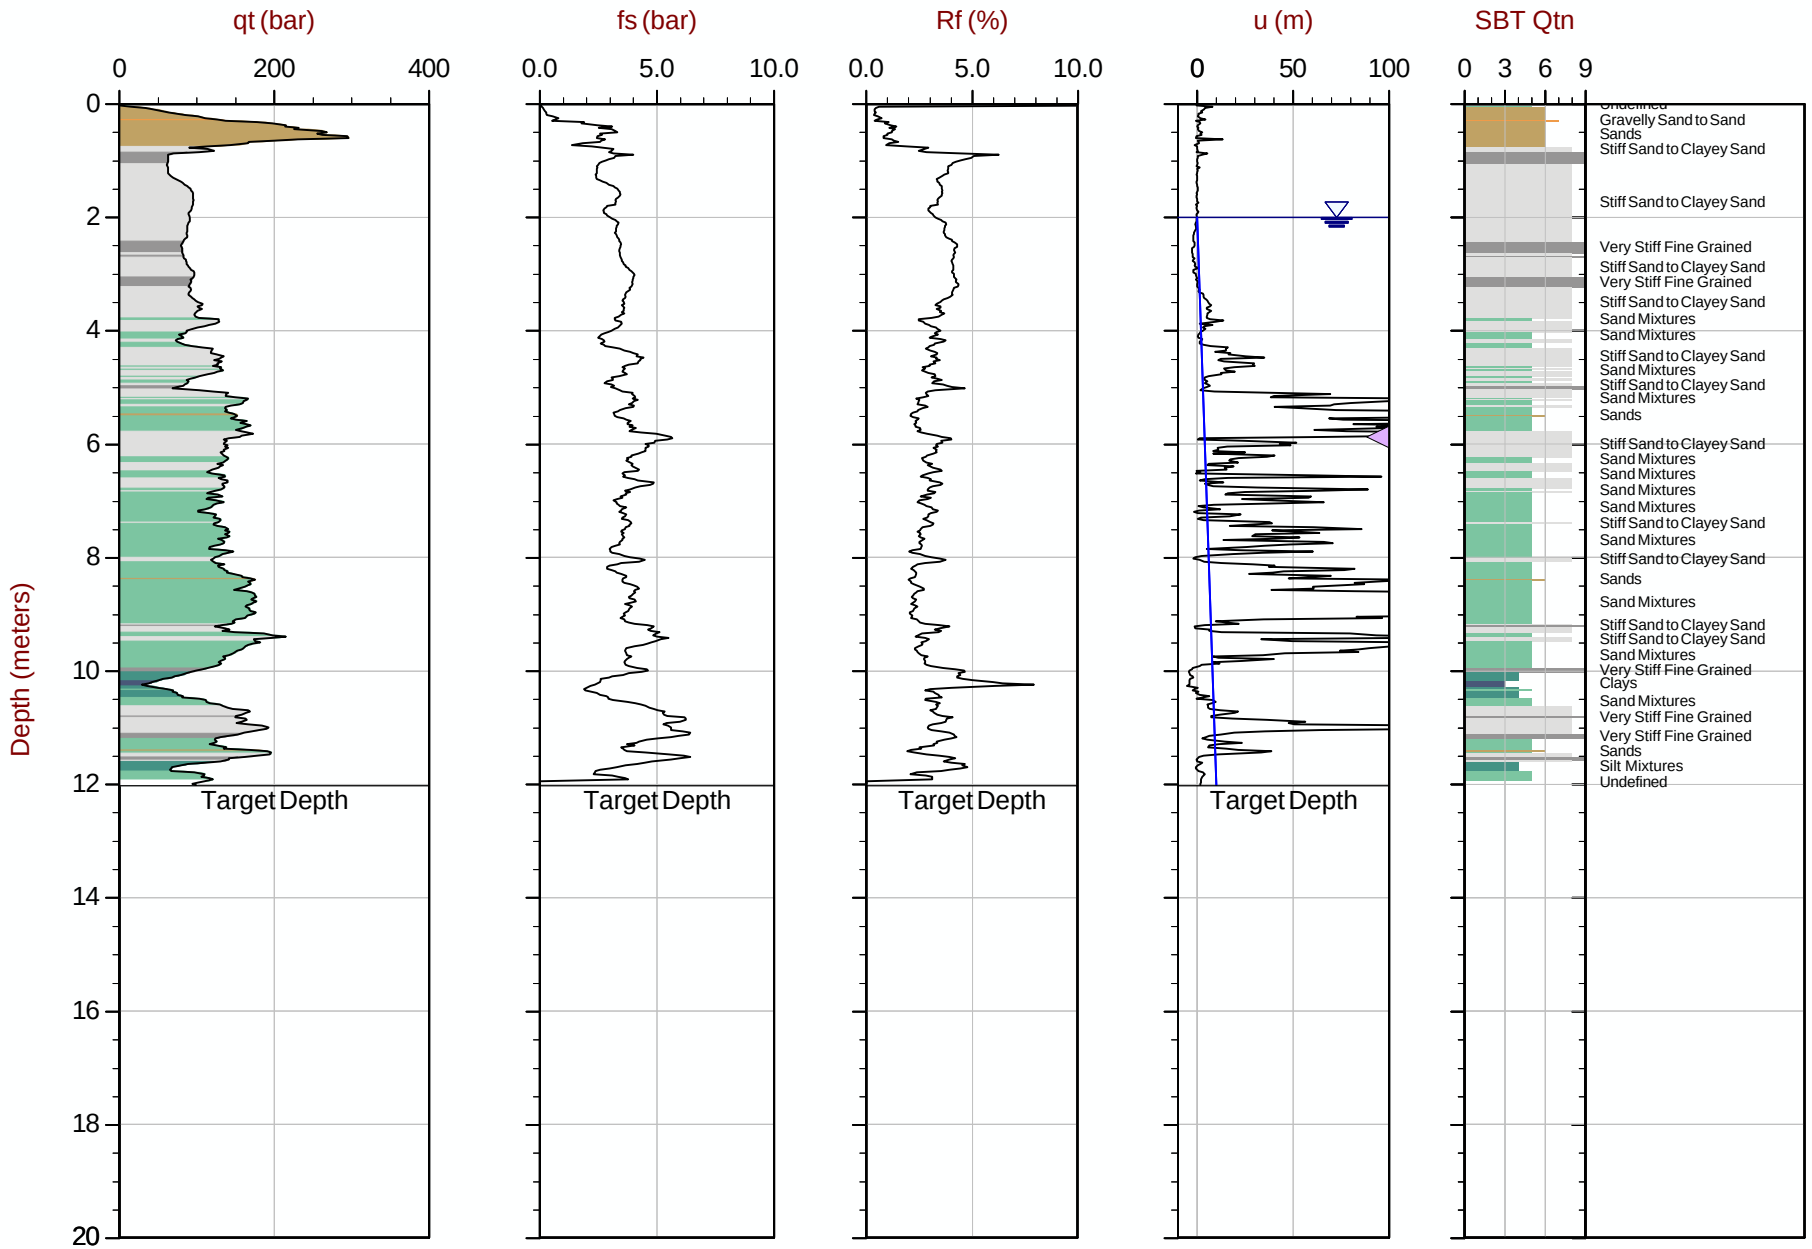

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT304.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416542m Elev: 770.051m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 16:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT305
Cone: 854:T1500F15U35 Area= 15cm2

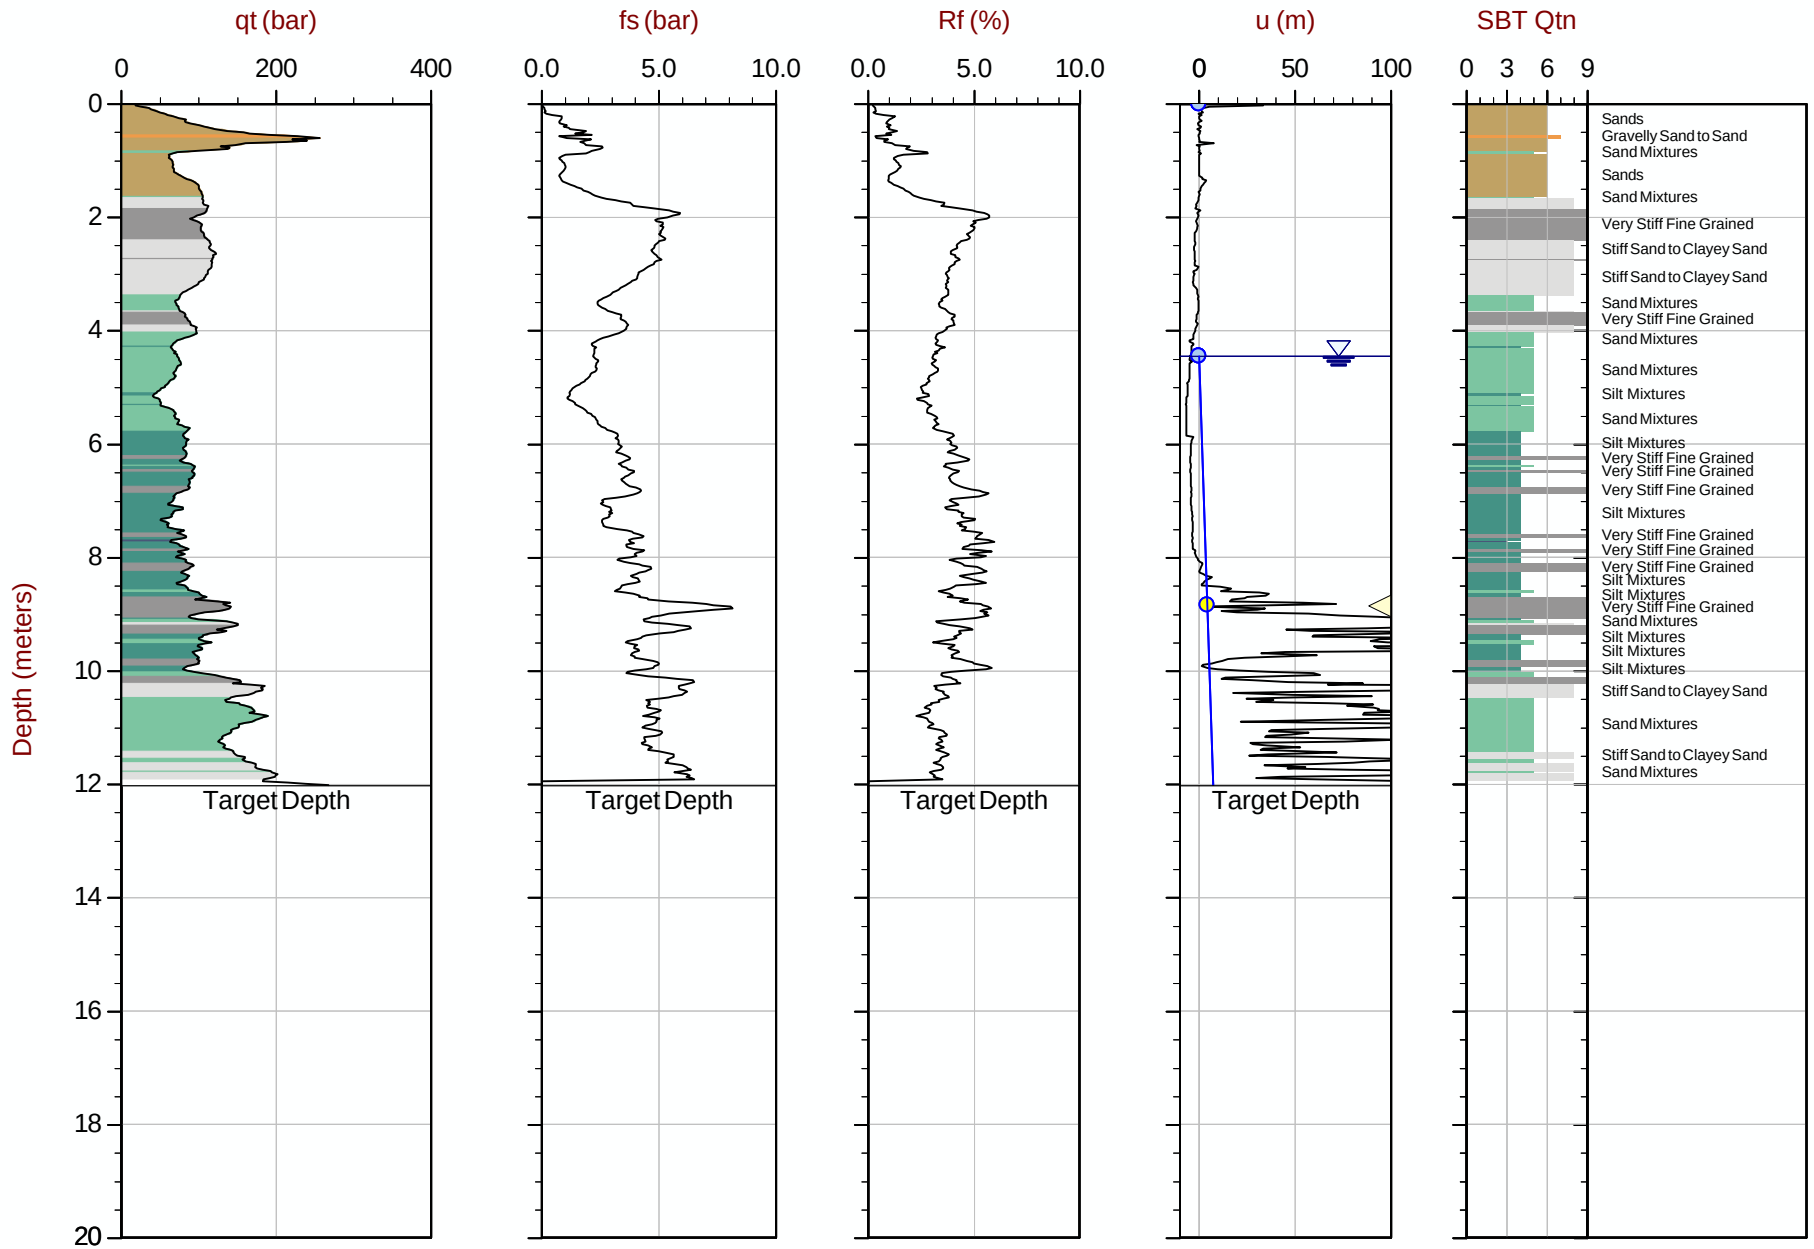

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT305.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416493m Elev: 770.908m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 06:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT306
Cone: 854:T1500F15U35 Area= 15cm2

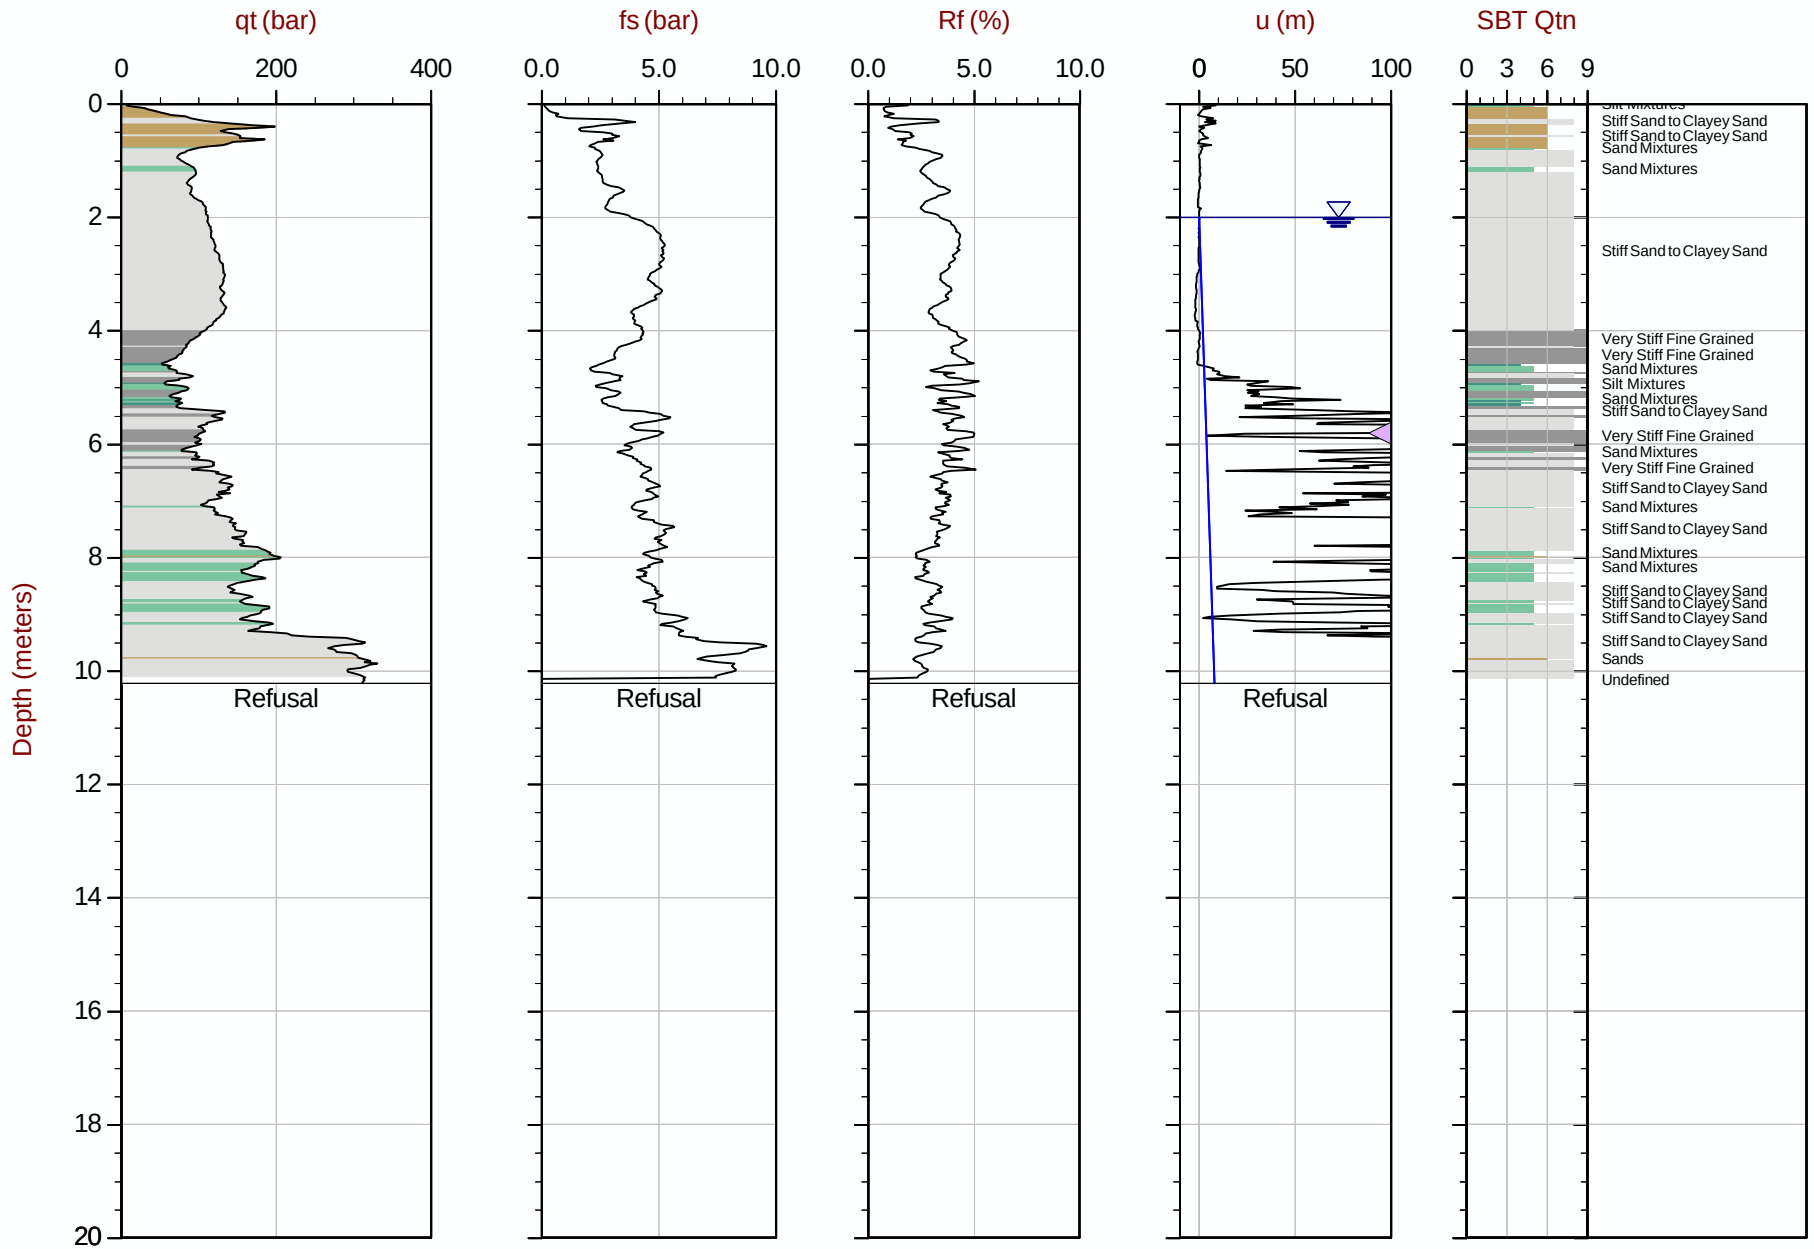

Max Depth: 10.225 m / 33.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT306.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416443m Elev: 770.594m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 09:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT307
Cone: 854:T1500F15U35 Area= 15cm2

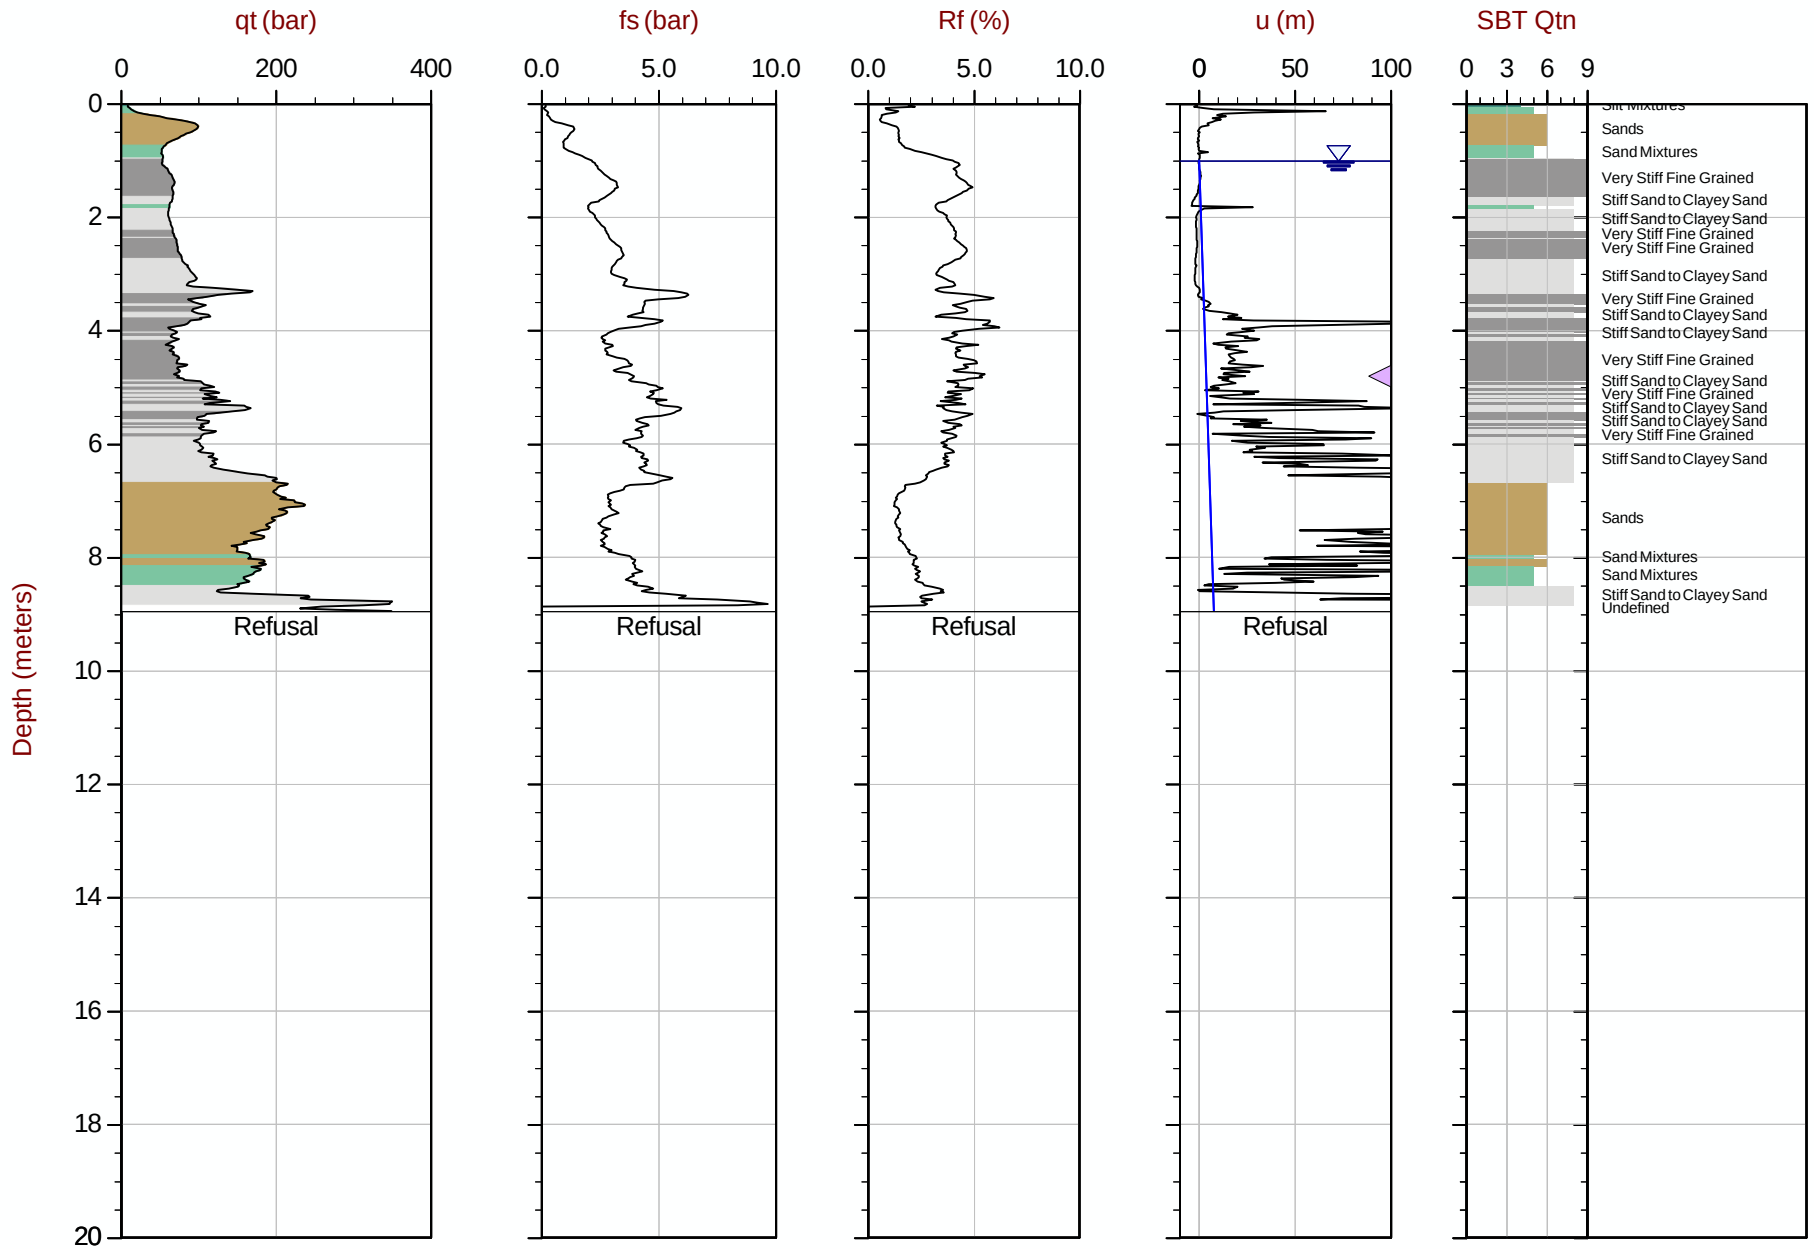

Max Depth: 8.950 m / 29.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT307.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416394m Elev: 770.324m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 10:11
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT308
Cone: 854:T1500F15U35 Area= 15cm2

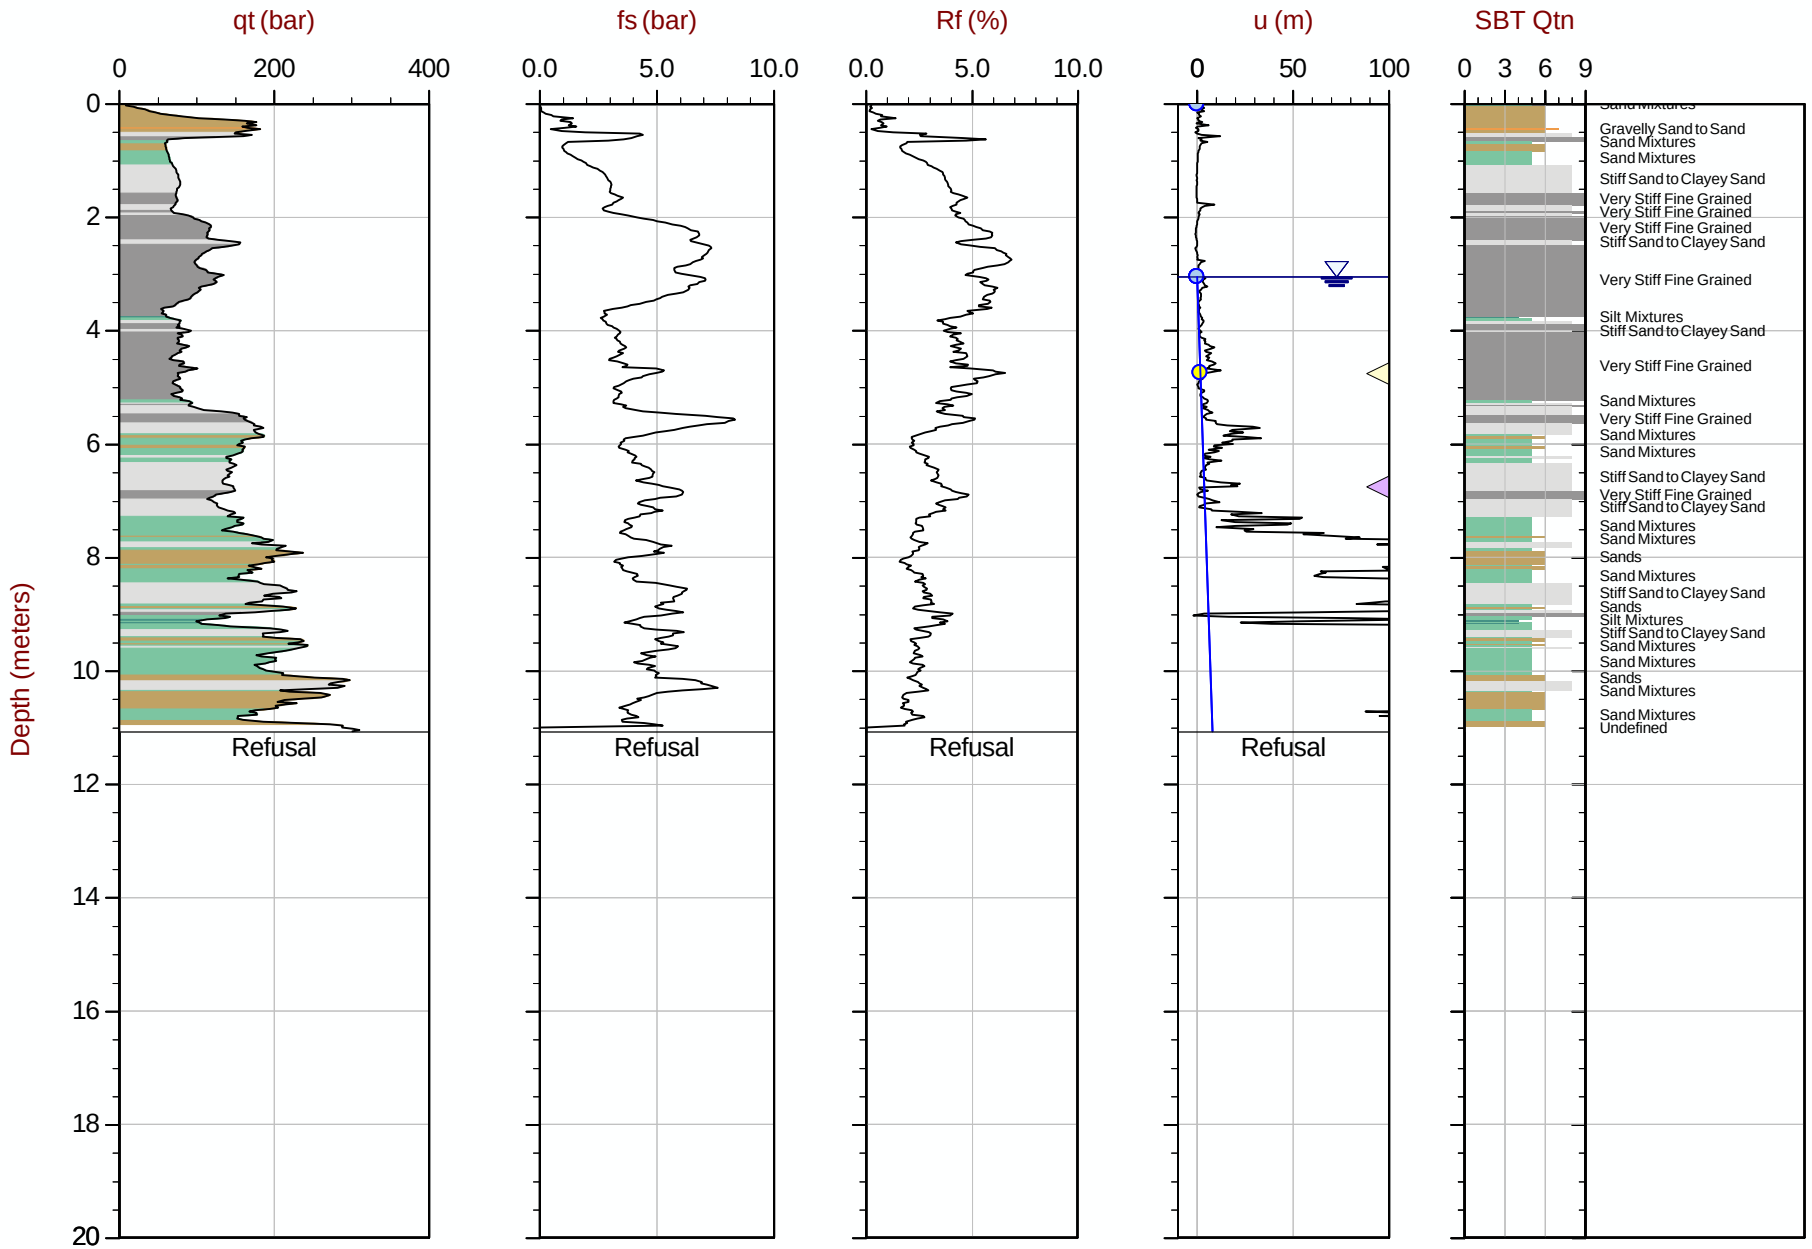

Max Depth: 11.075 m / 36.33 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT308.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416343m Elev: 770.650m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT309
Cone: 854:T1500F15U35 Area= 15cm2

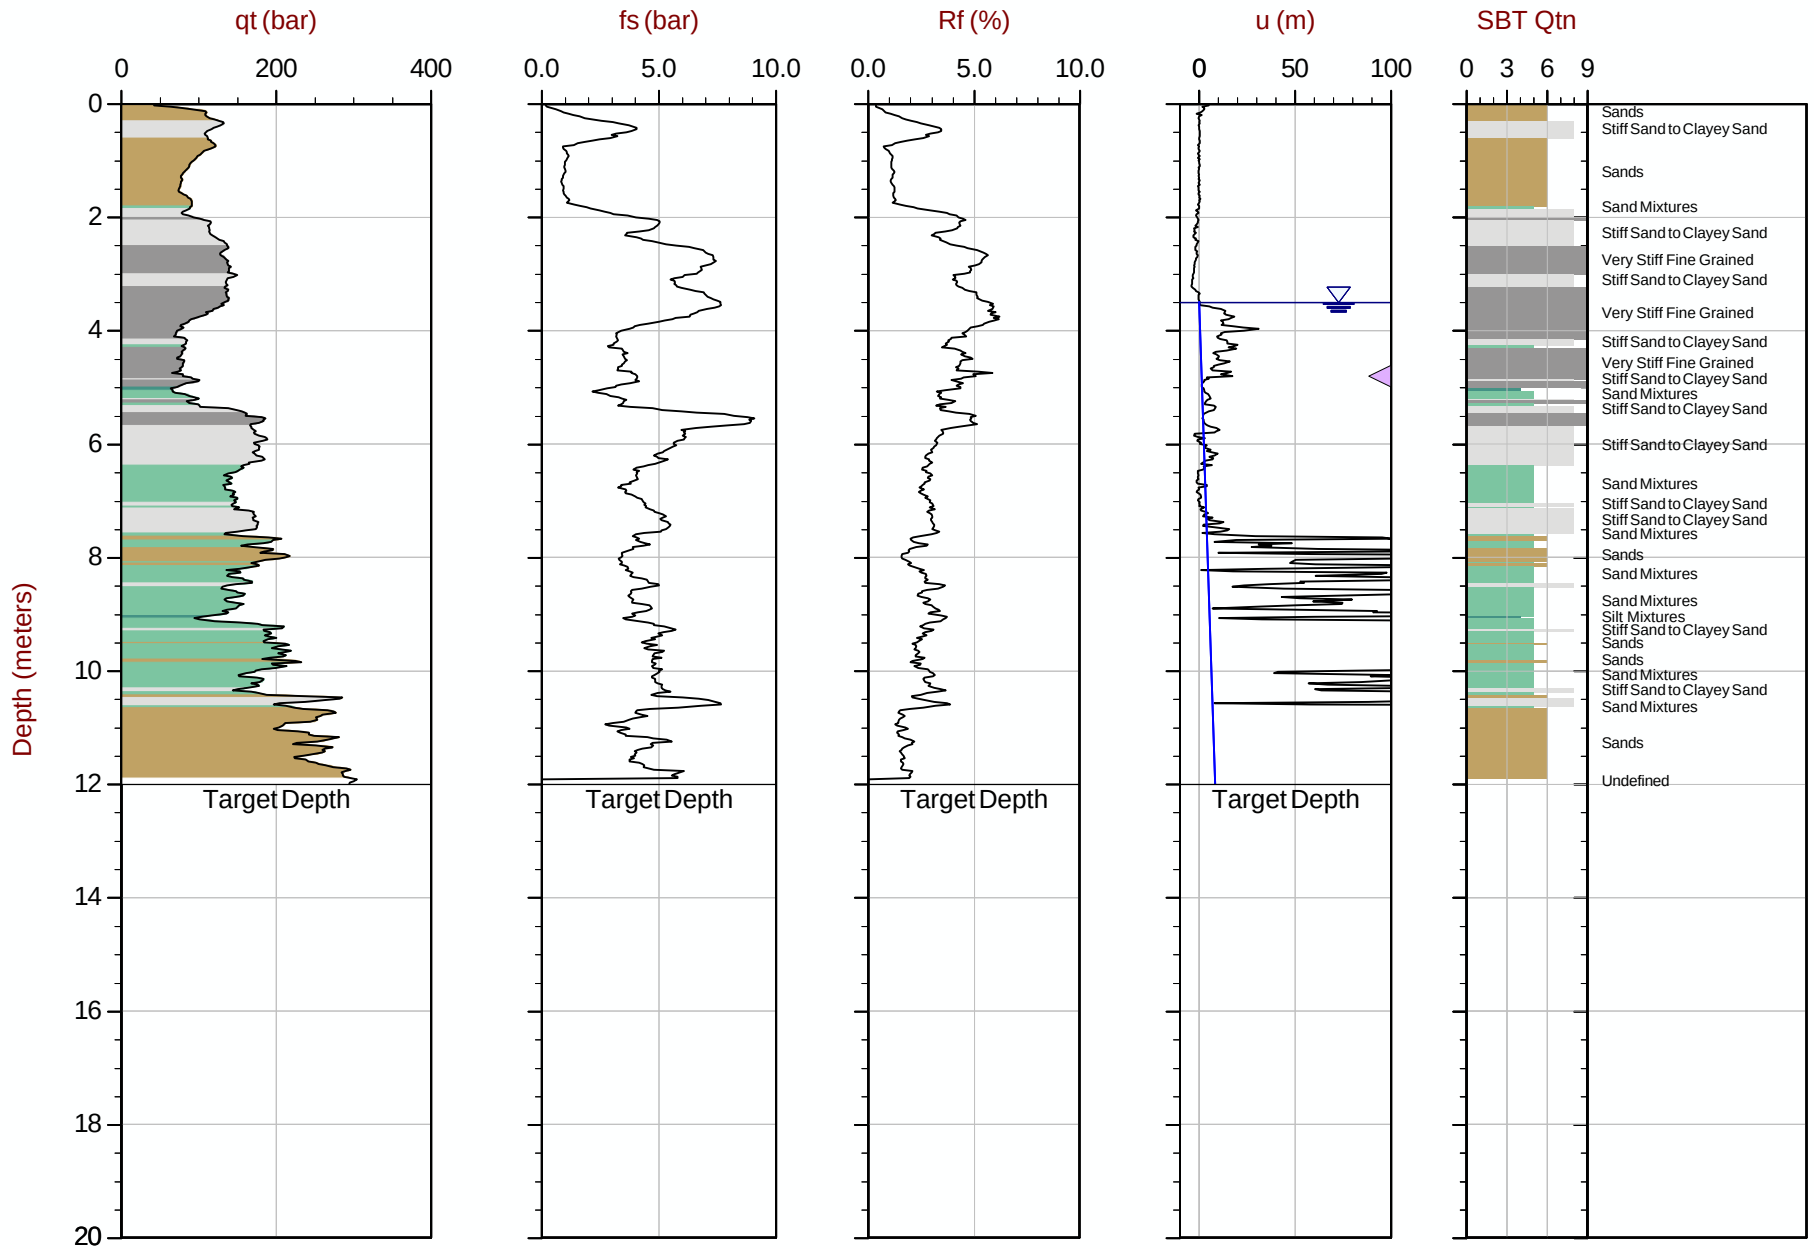

Max Depth: 12.000 m / 39.37 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT309.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416294m Elev: 771.192m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 13:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT310
Cone: 854:T1500F15U35 Area= 15cm2

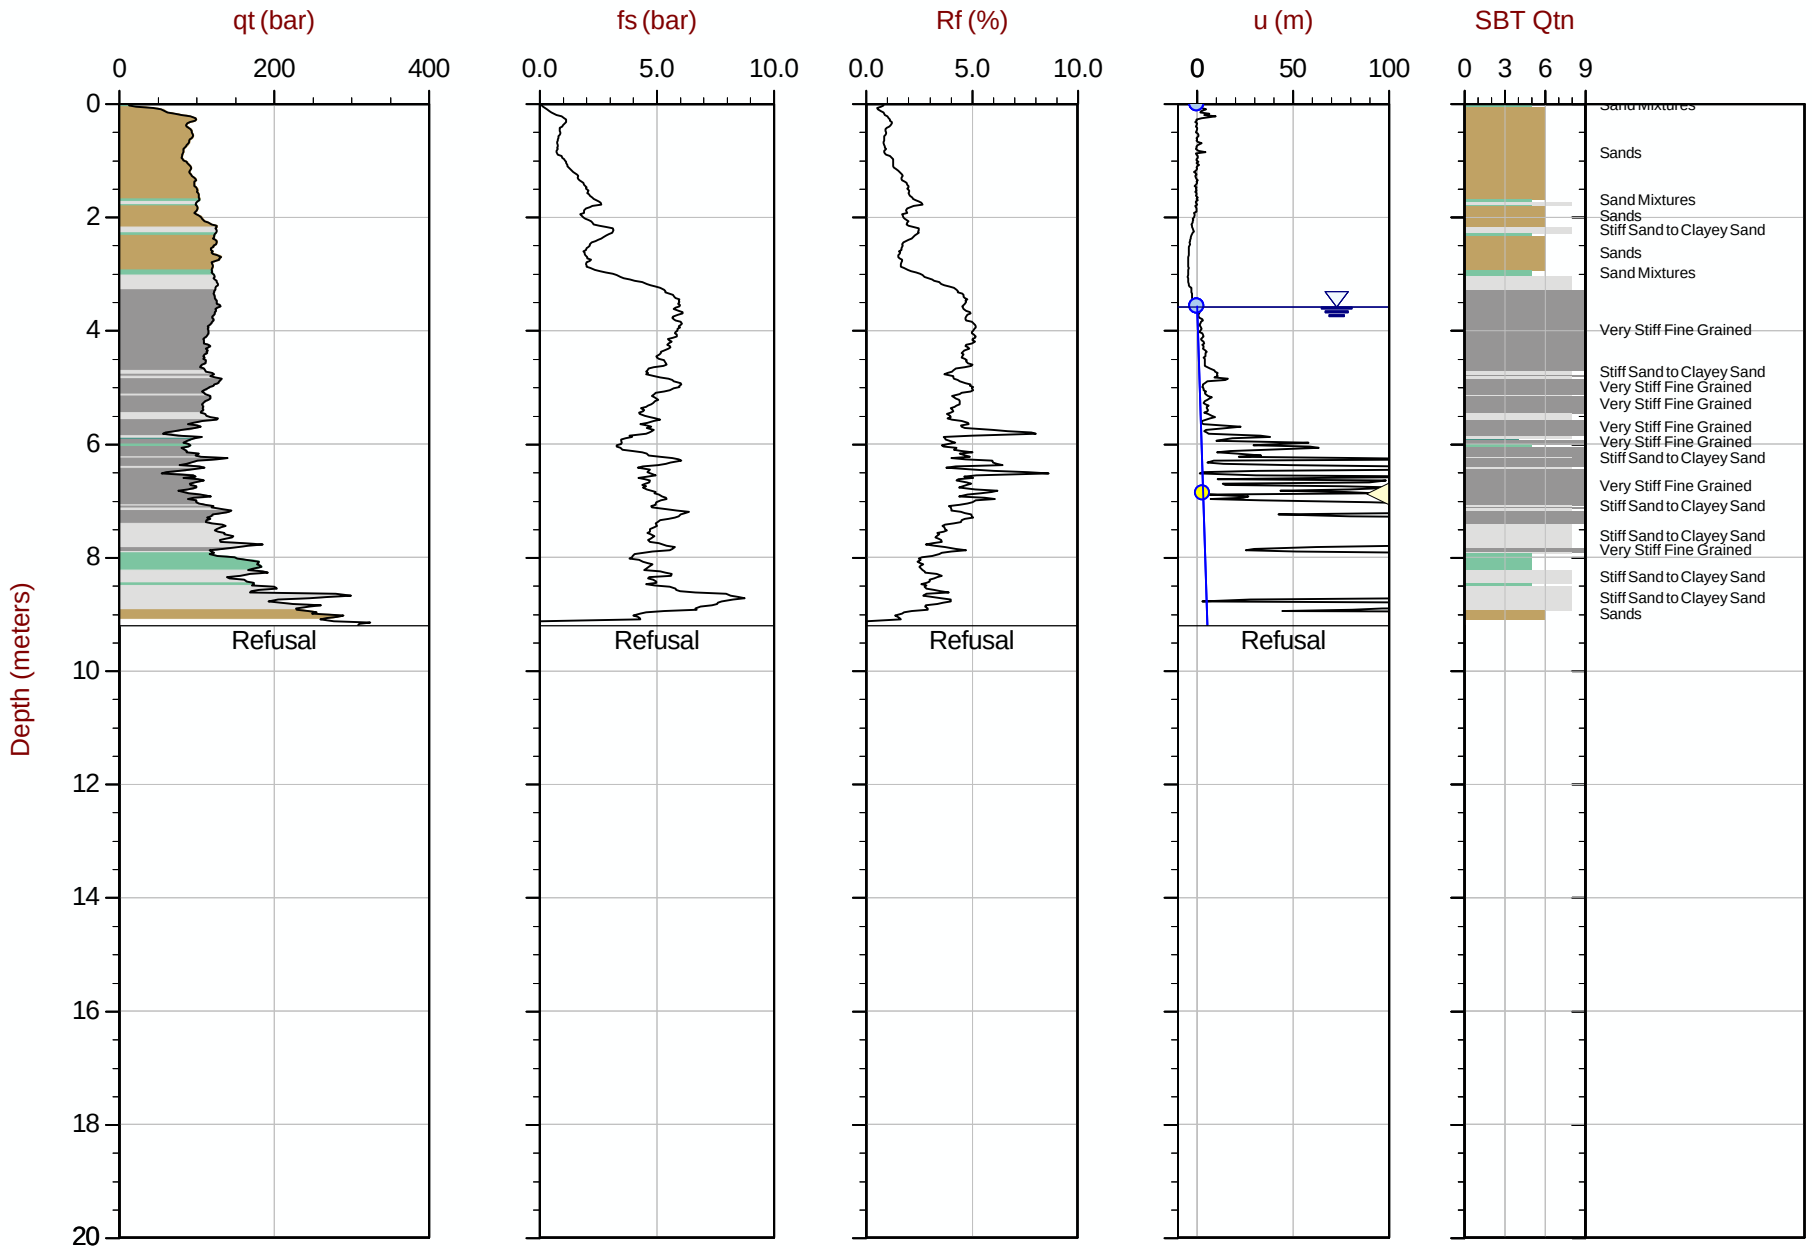

Max Depth: 9.200 m / 30.18 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT310.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416243m Elev: 771.391m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 15:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT311
Cone: 854:T1500F15U35 Area= 15cm2

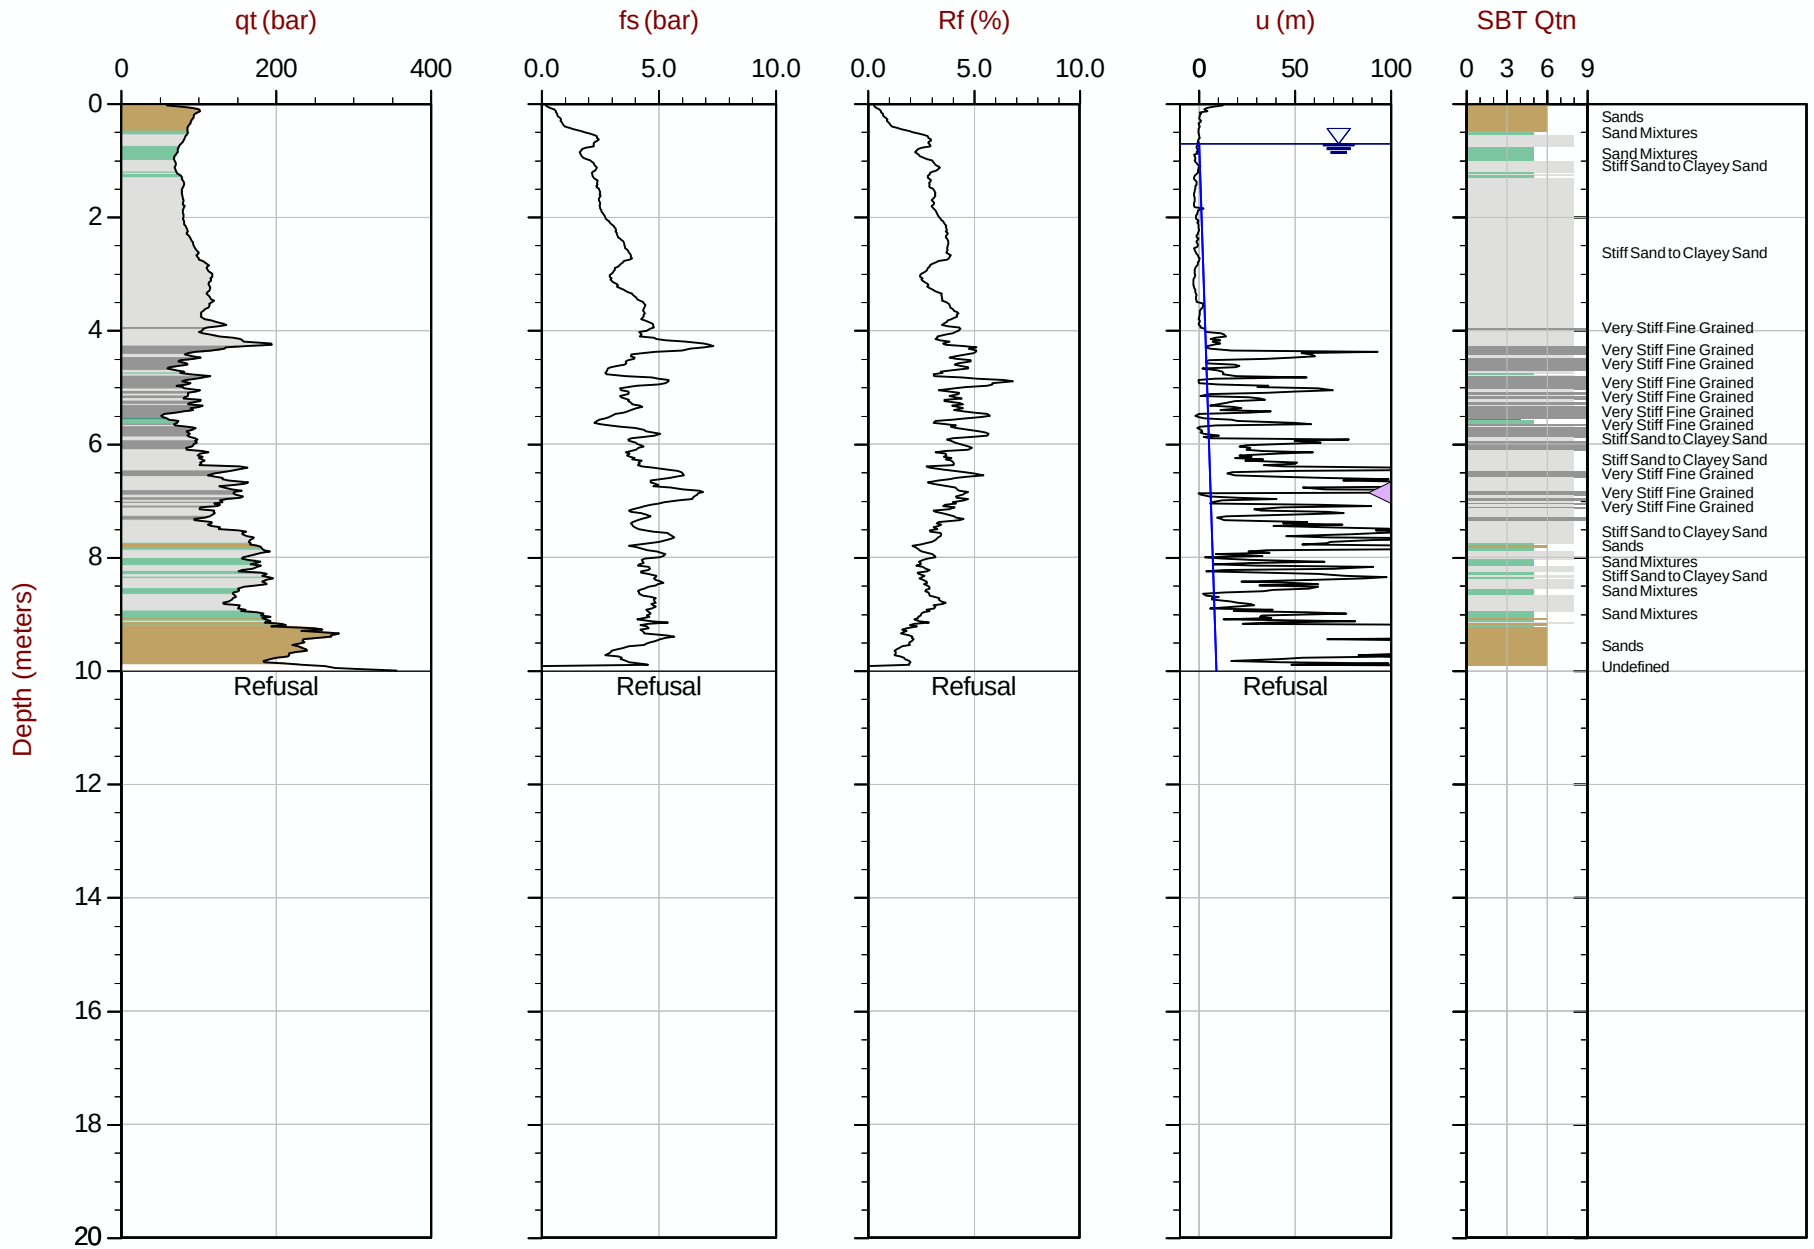

Max Depth: 10.000 m / 32.81 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT311.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416194m Elev: 771.238m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 17:01
Site: Brooks, Alberta

Sounding: RCPT22-22CPT312
Cone: 854:T1500F15U35 Area= 15cm2

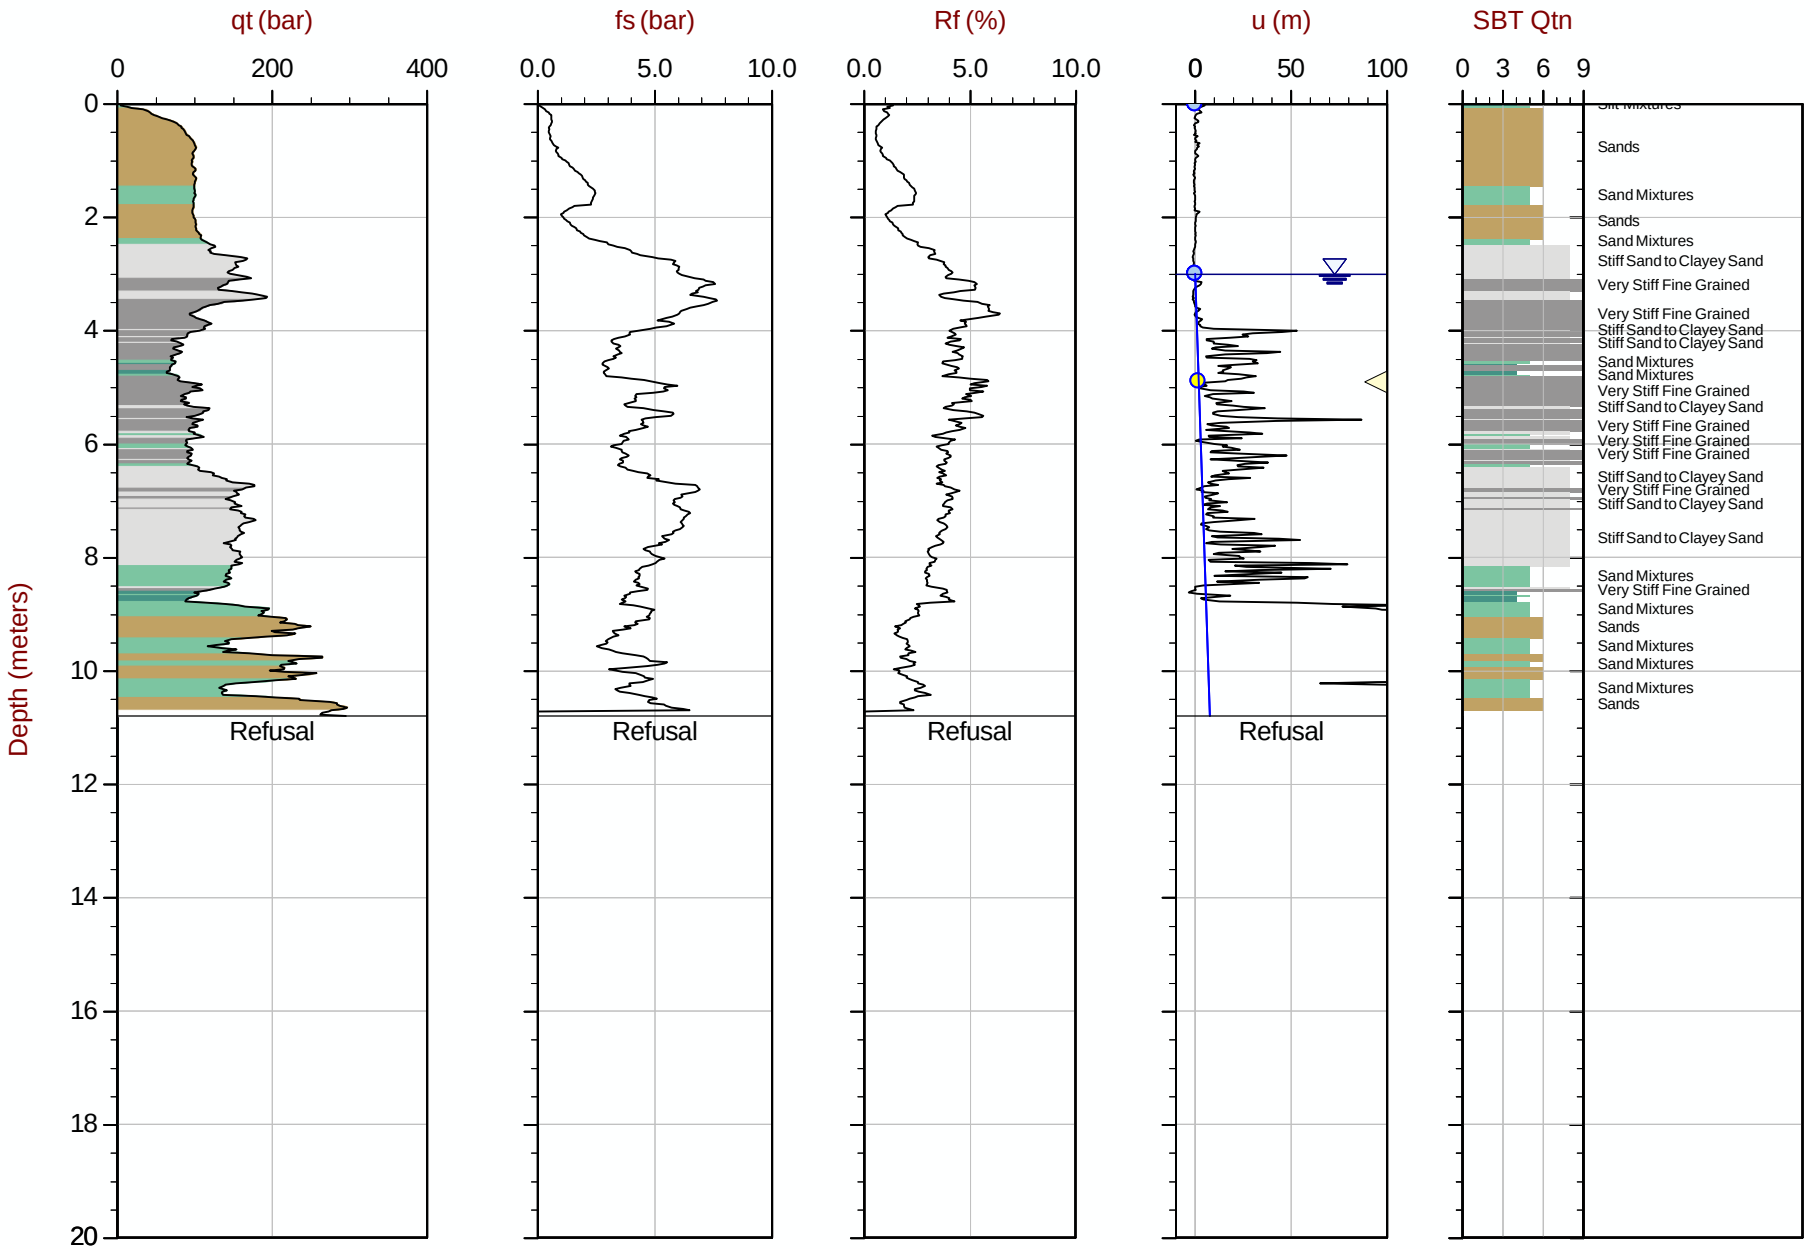

Max Depth: 10.800 m / 35.43 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT312.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416143m Elev: 771.376m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 08:55
Site: Brooks, Alberta

Sounding: RCPT22-22CPT313
Cone: 854:T1500F15U35 Area= 15cm2

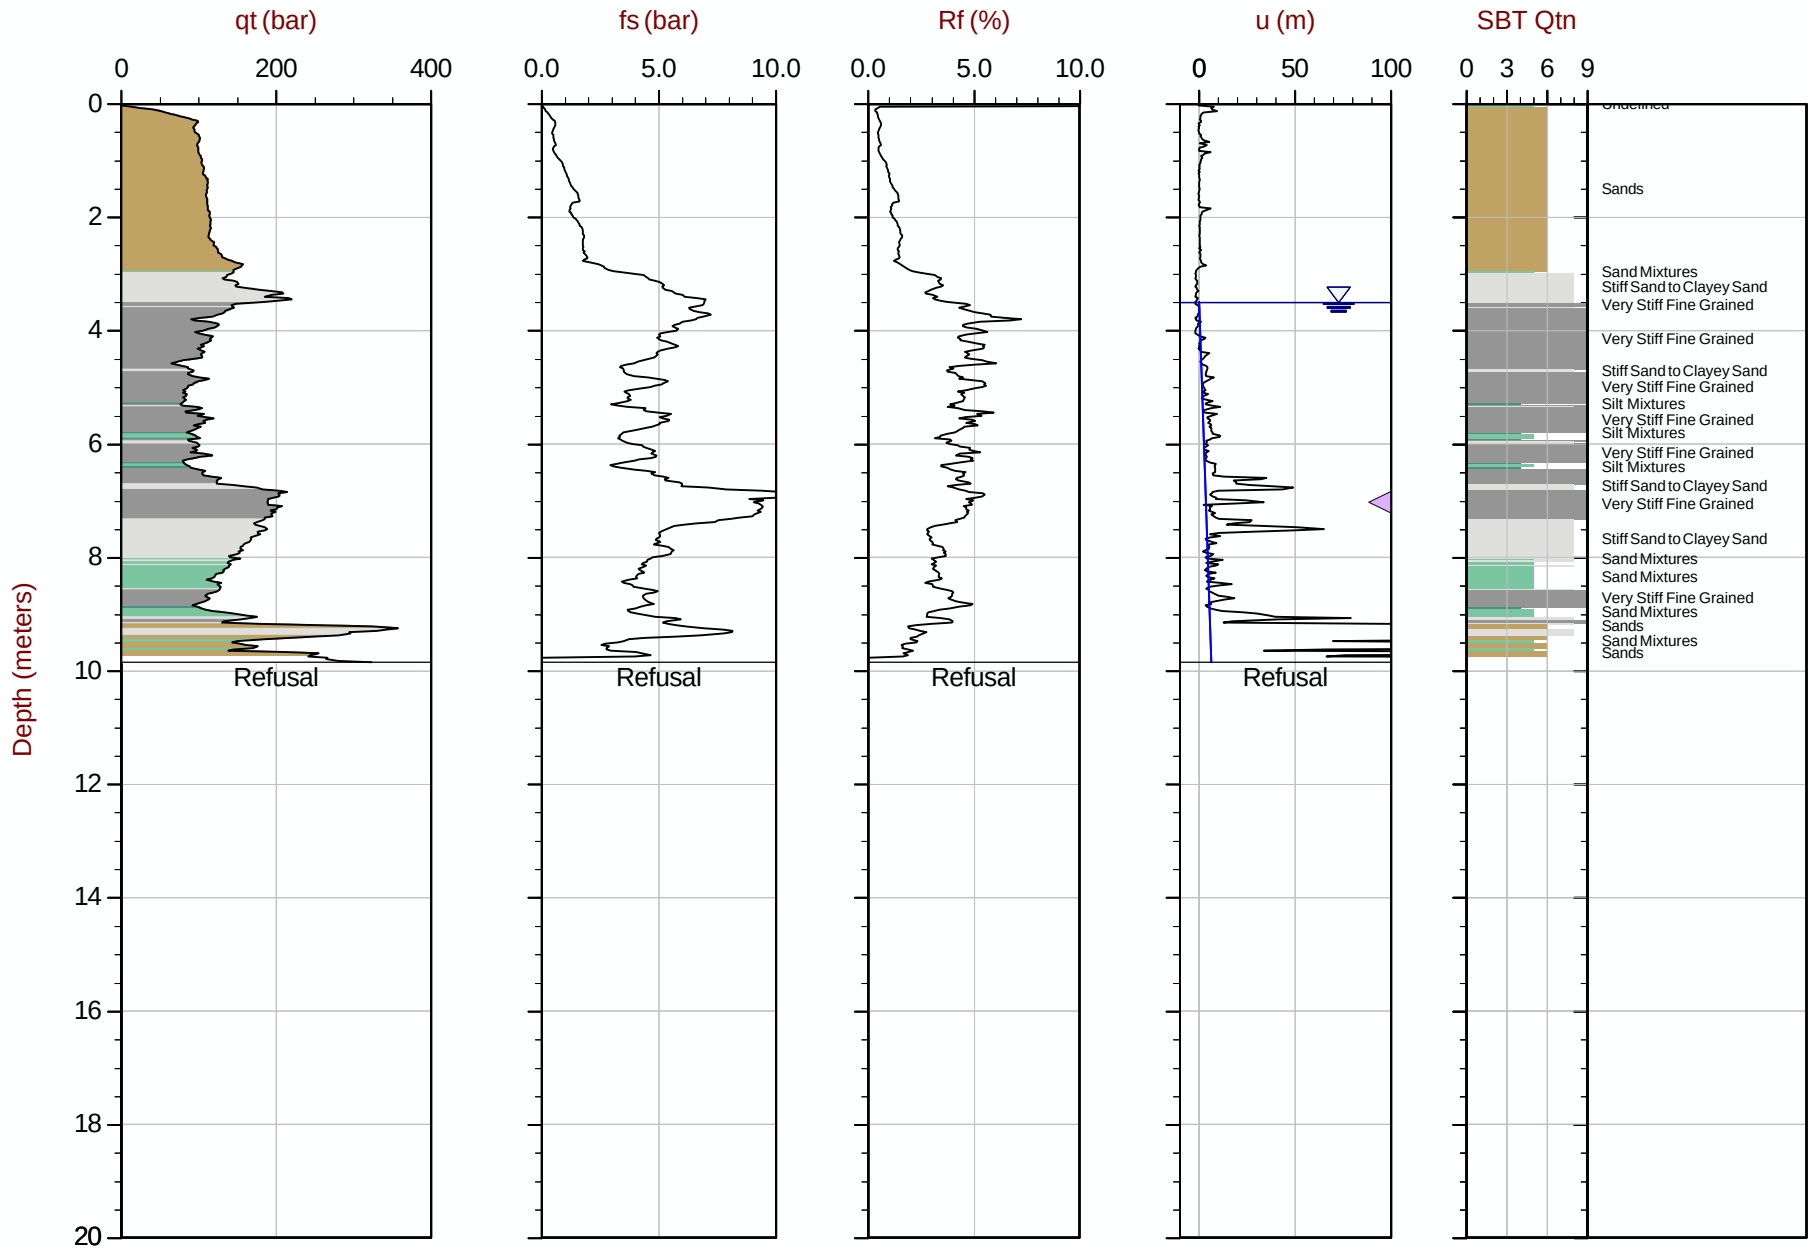

Max Depth: 9.850 m / 32.32 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT313.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416099m Elev: 771.568m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 09:56
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT314
Cone: 854:T1500F15U35 Area= 15cm2

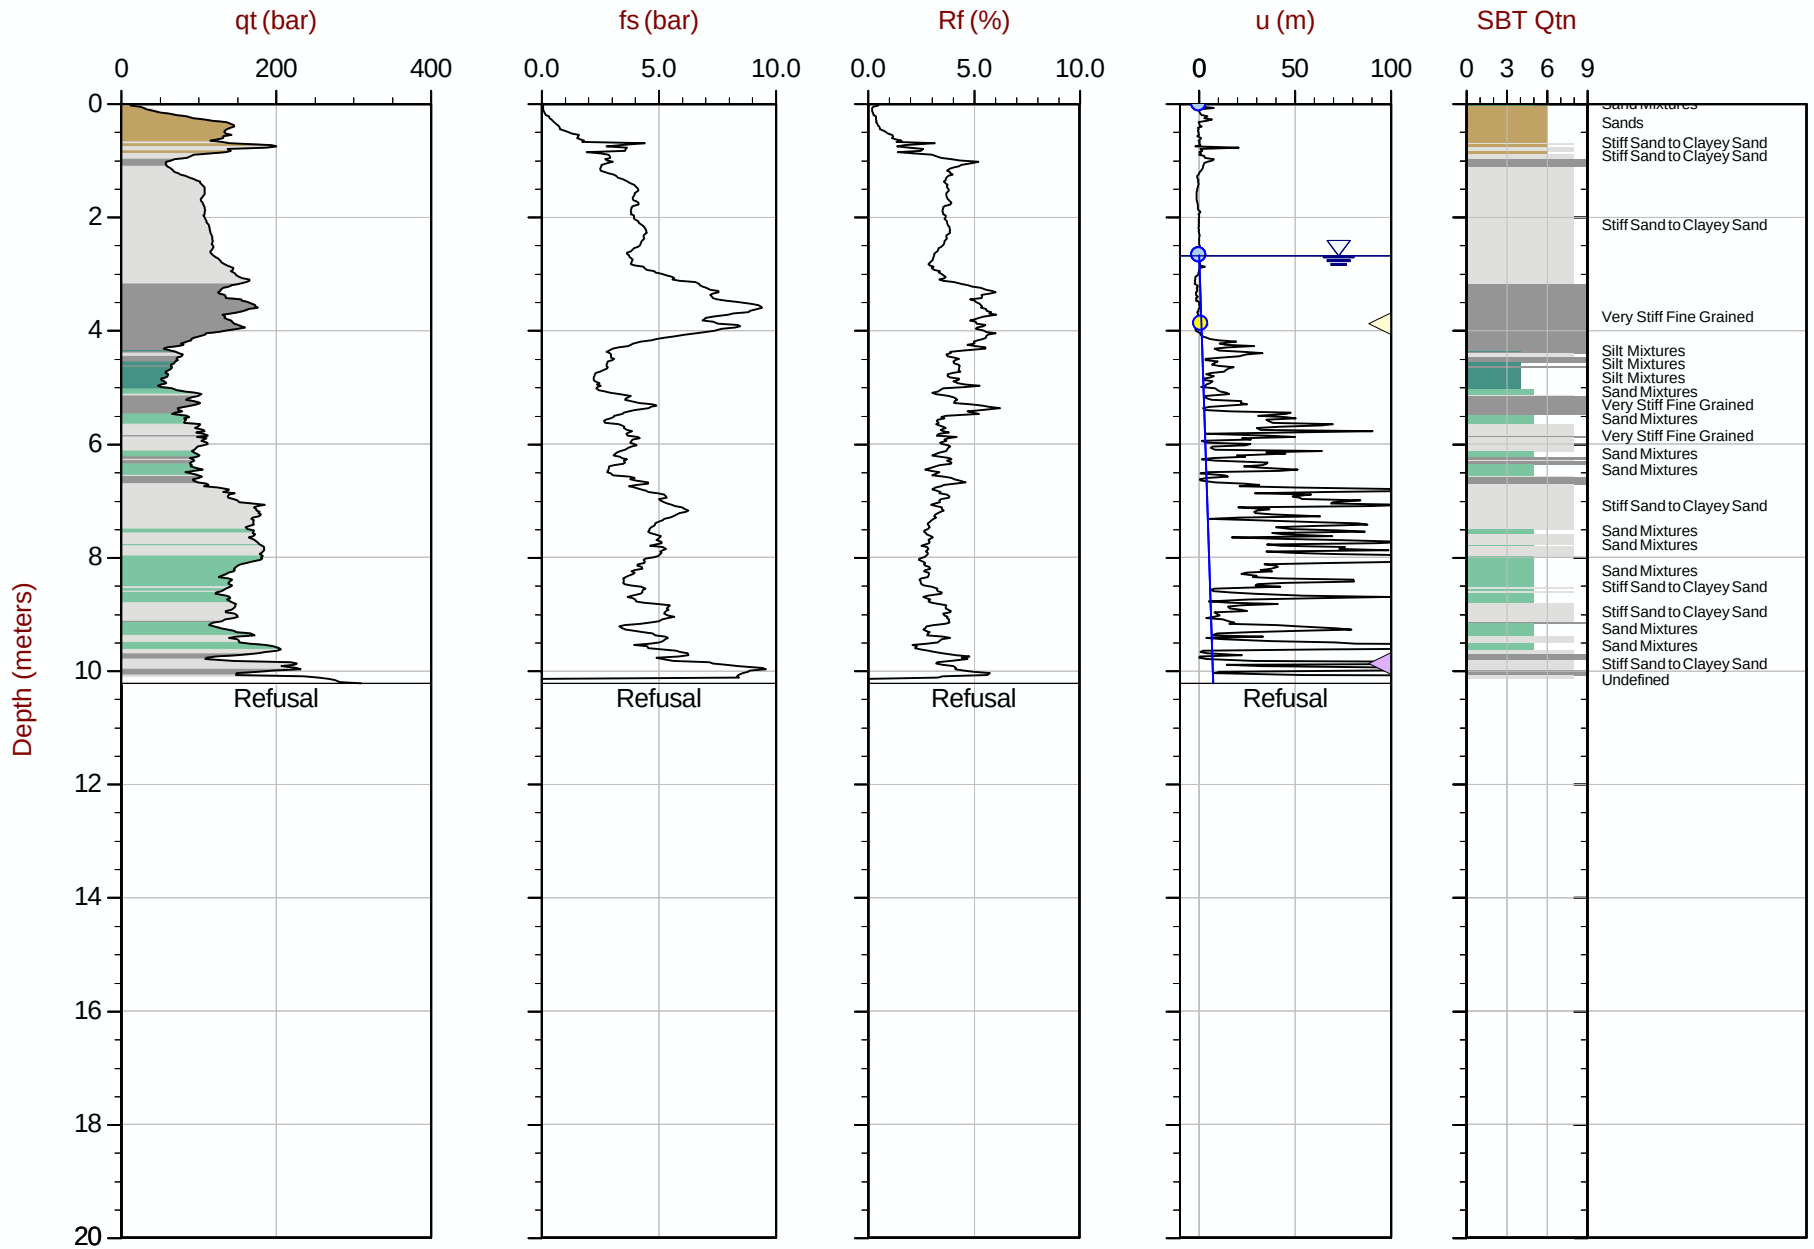

Max Depth: 10.225 m / 33.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT314.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416043m Elev: 771.585m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 12:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT315
Cone: 854:T1500F15U35 Area= 15cm2

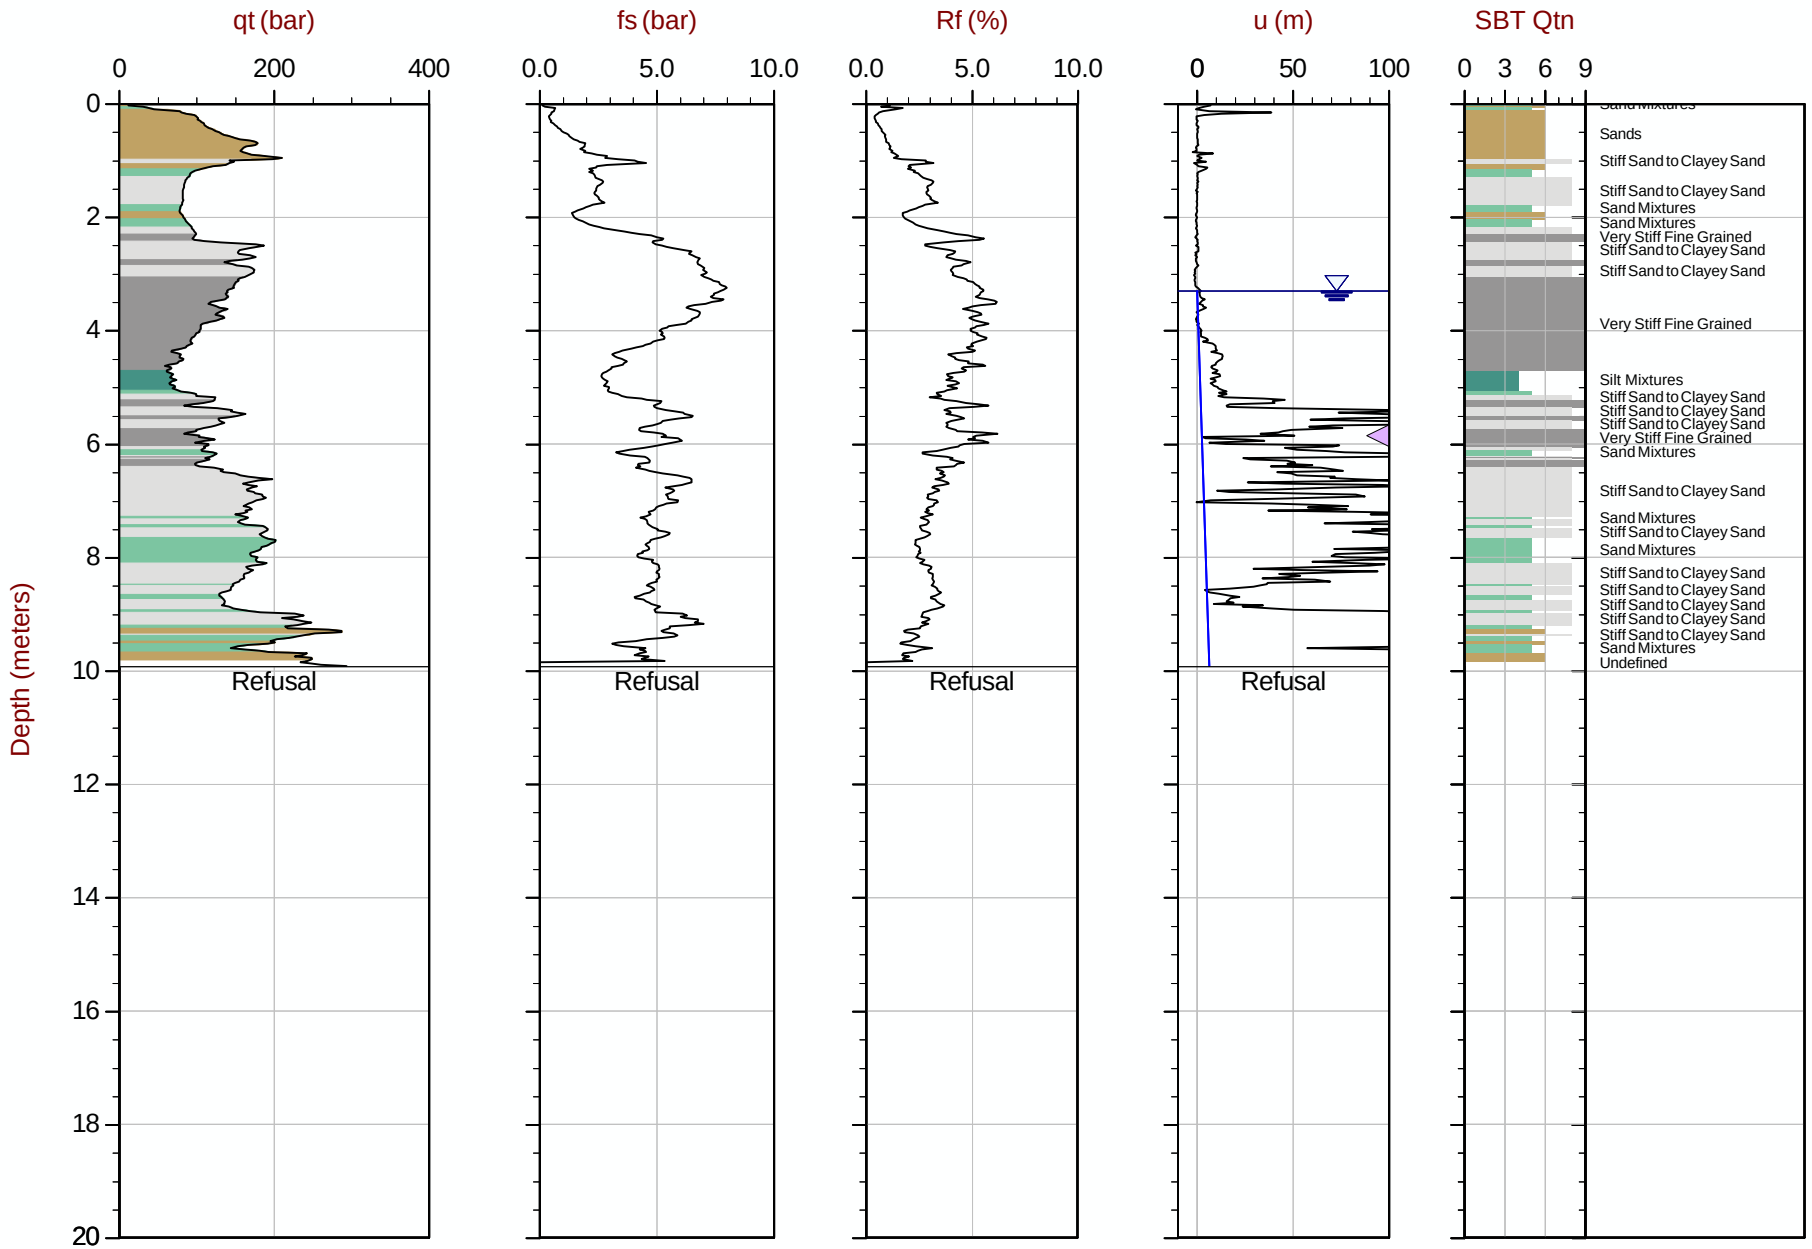

Max Depth: 9.925 m / 32.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT315.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 415990m Elev: 771.927m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 13:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT316
Cone: 854:T1500F15U35 Area= 15cm2

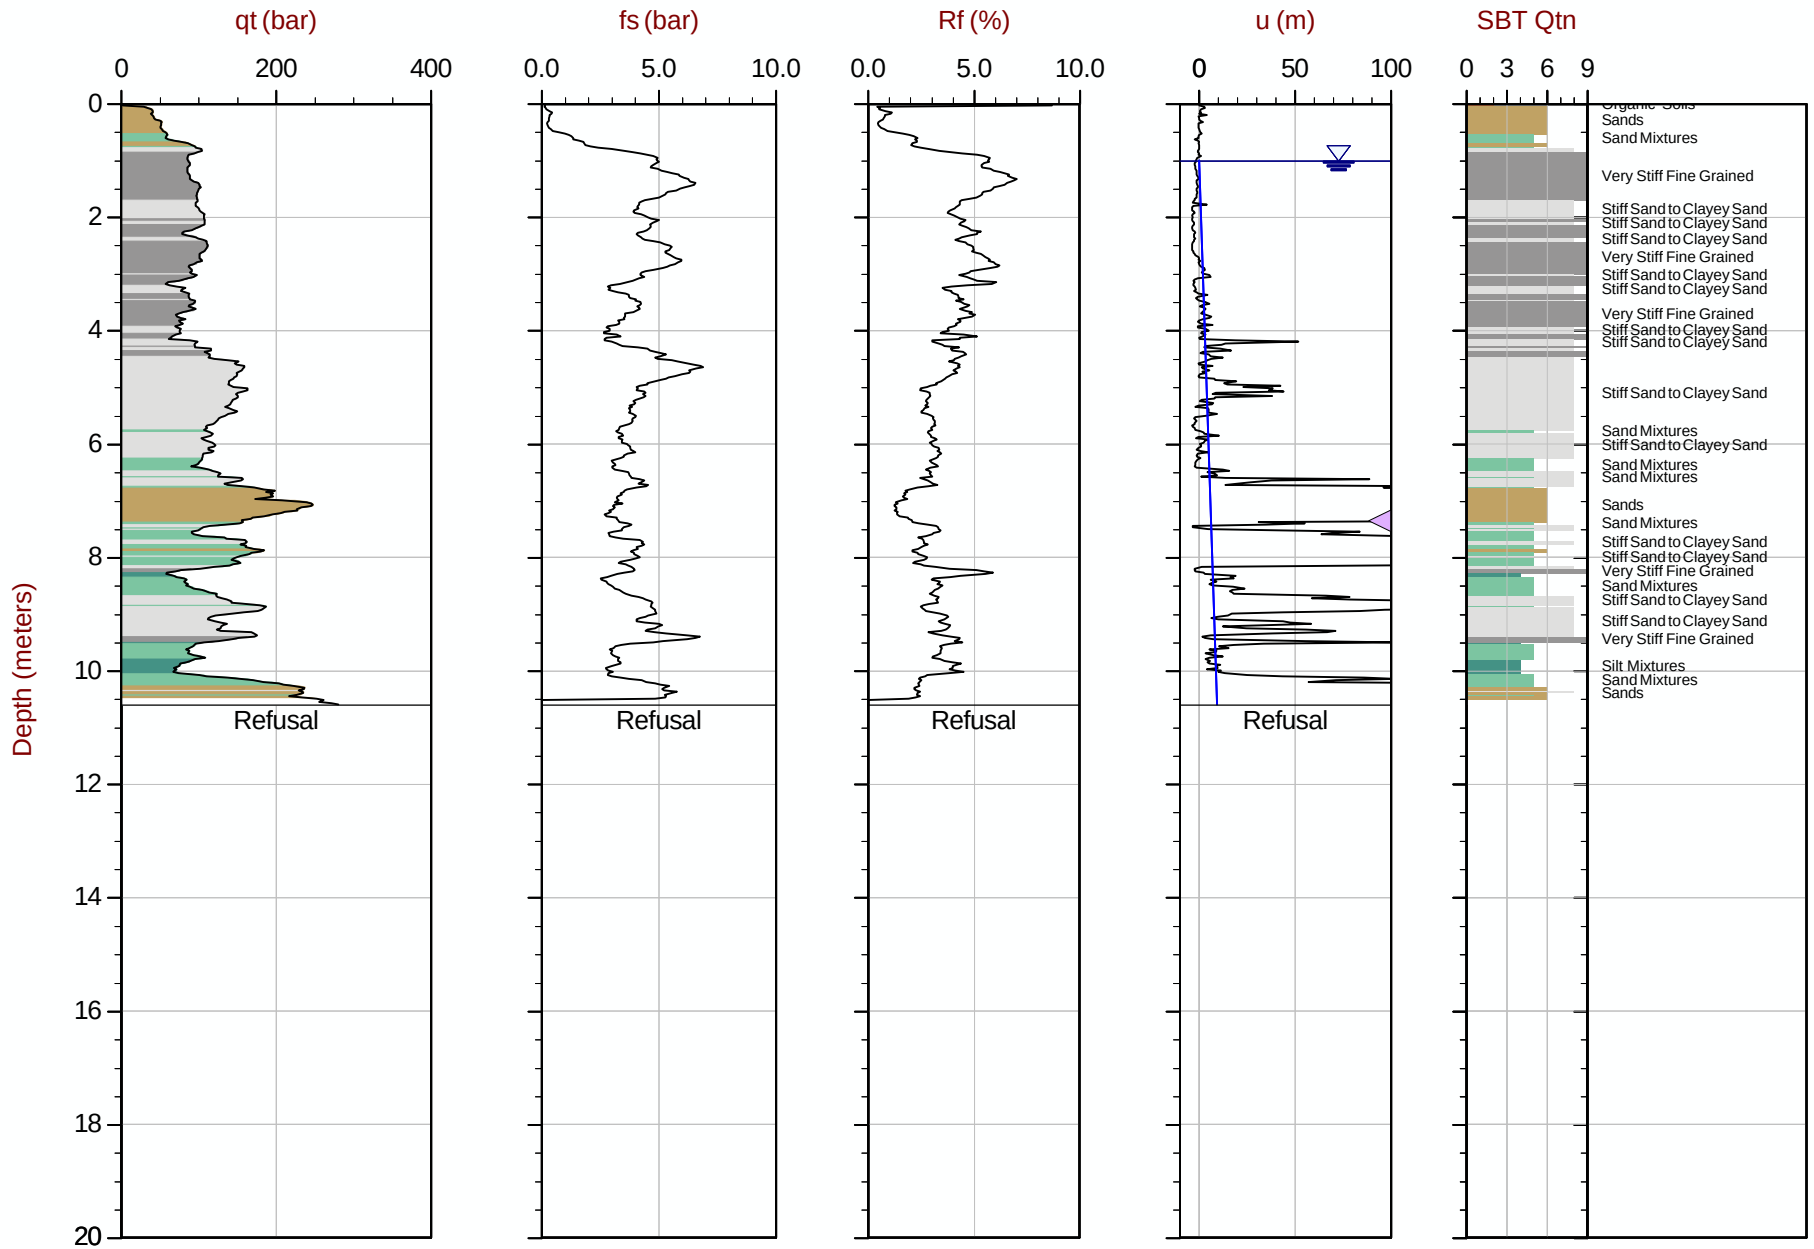

Max Depth: 10.600 m / 34.78 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT316.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609473m E: 415943m Elev: 772.448m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 14:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT317
Cone: 854:T1500F15U35 Area= 15cm2

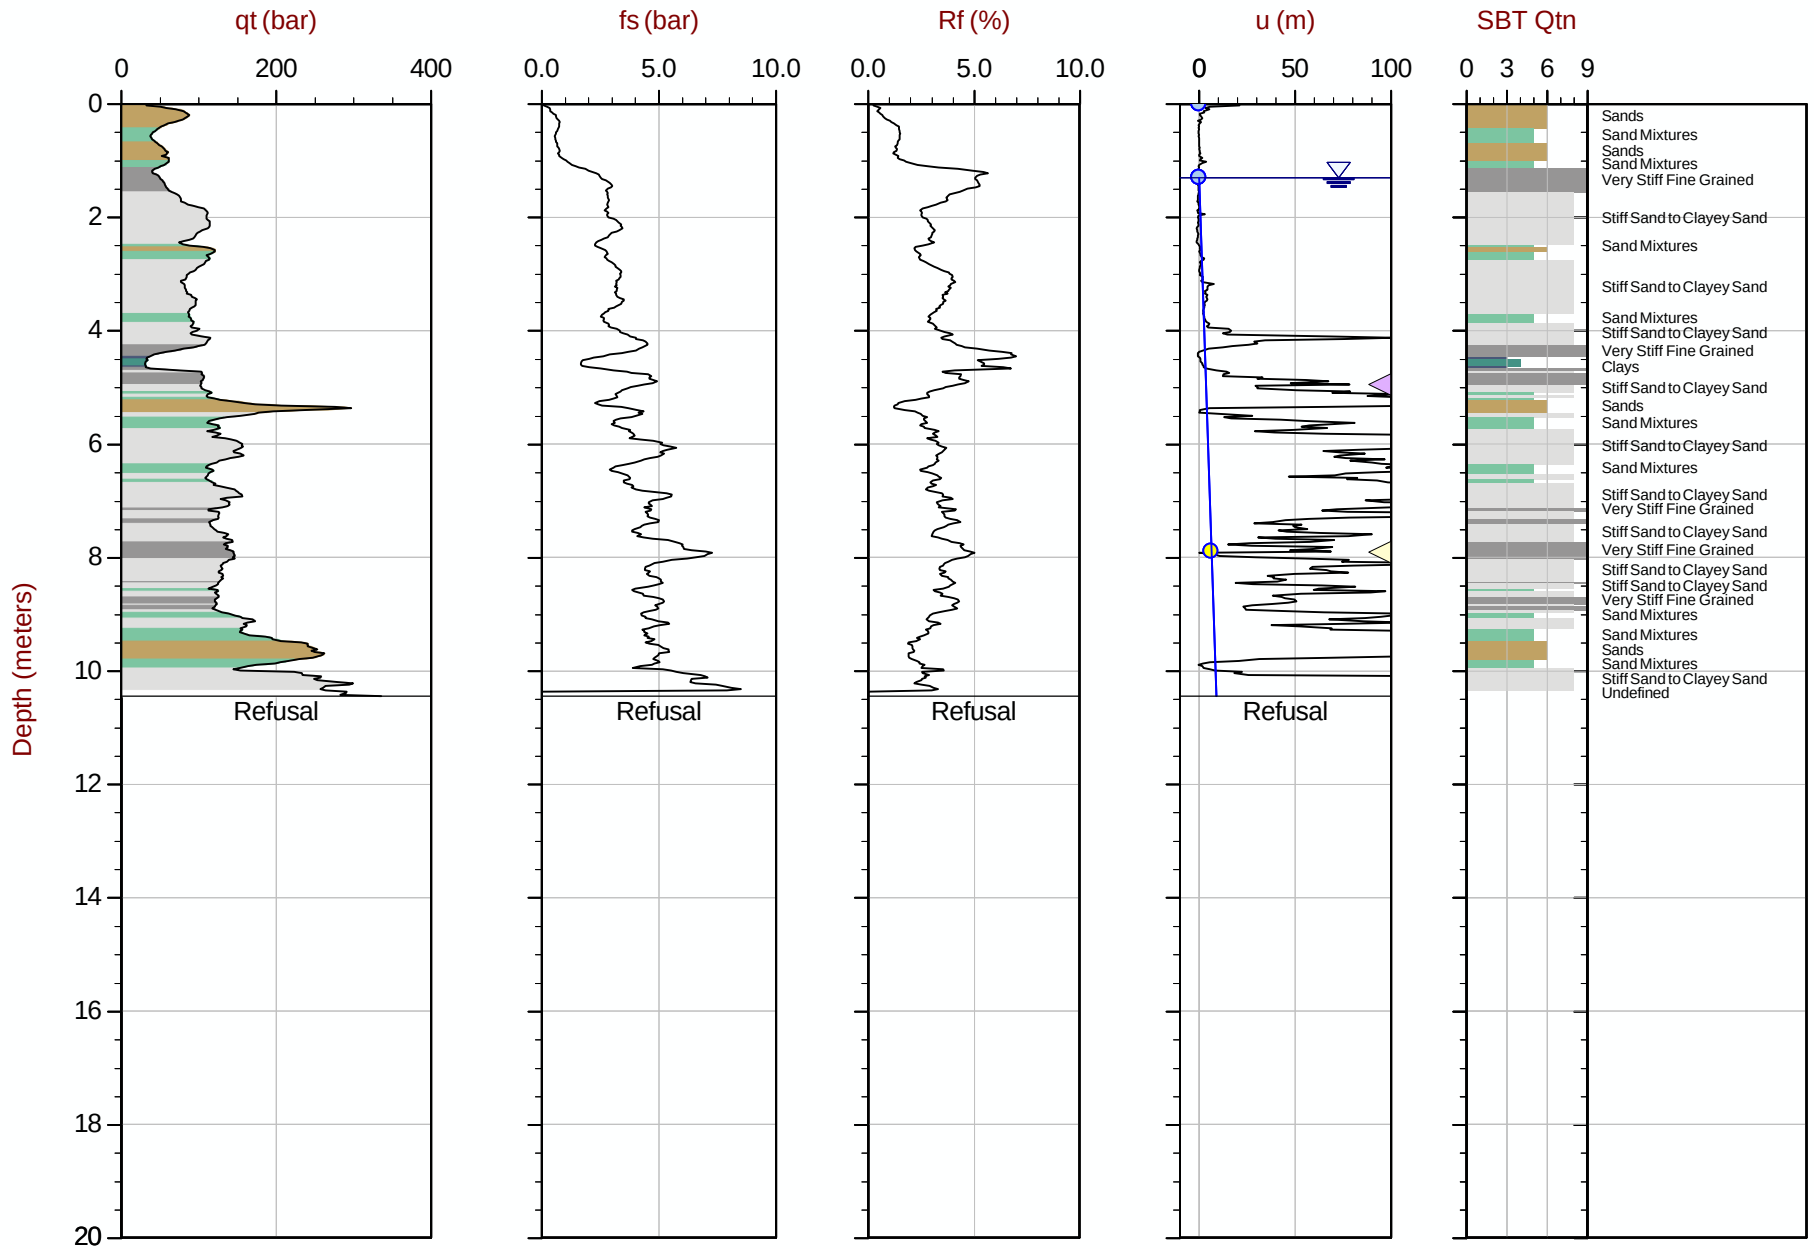

Max Depth: 10.450 m / 34.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT317.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609471m E: 415893m Elev: 773.891m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 15:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT318
Cone: 854:T1500F15U35 Area= 15cm2

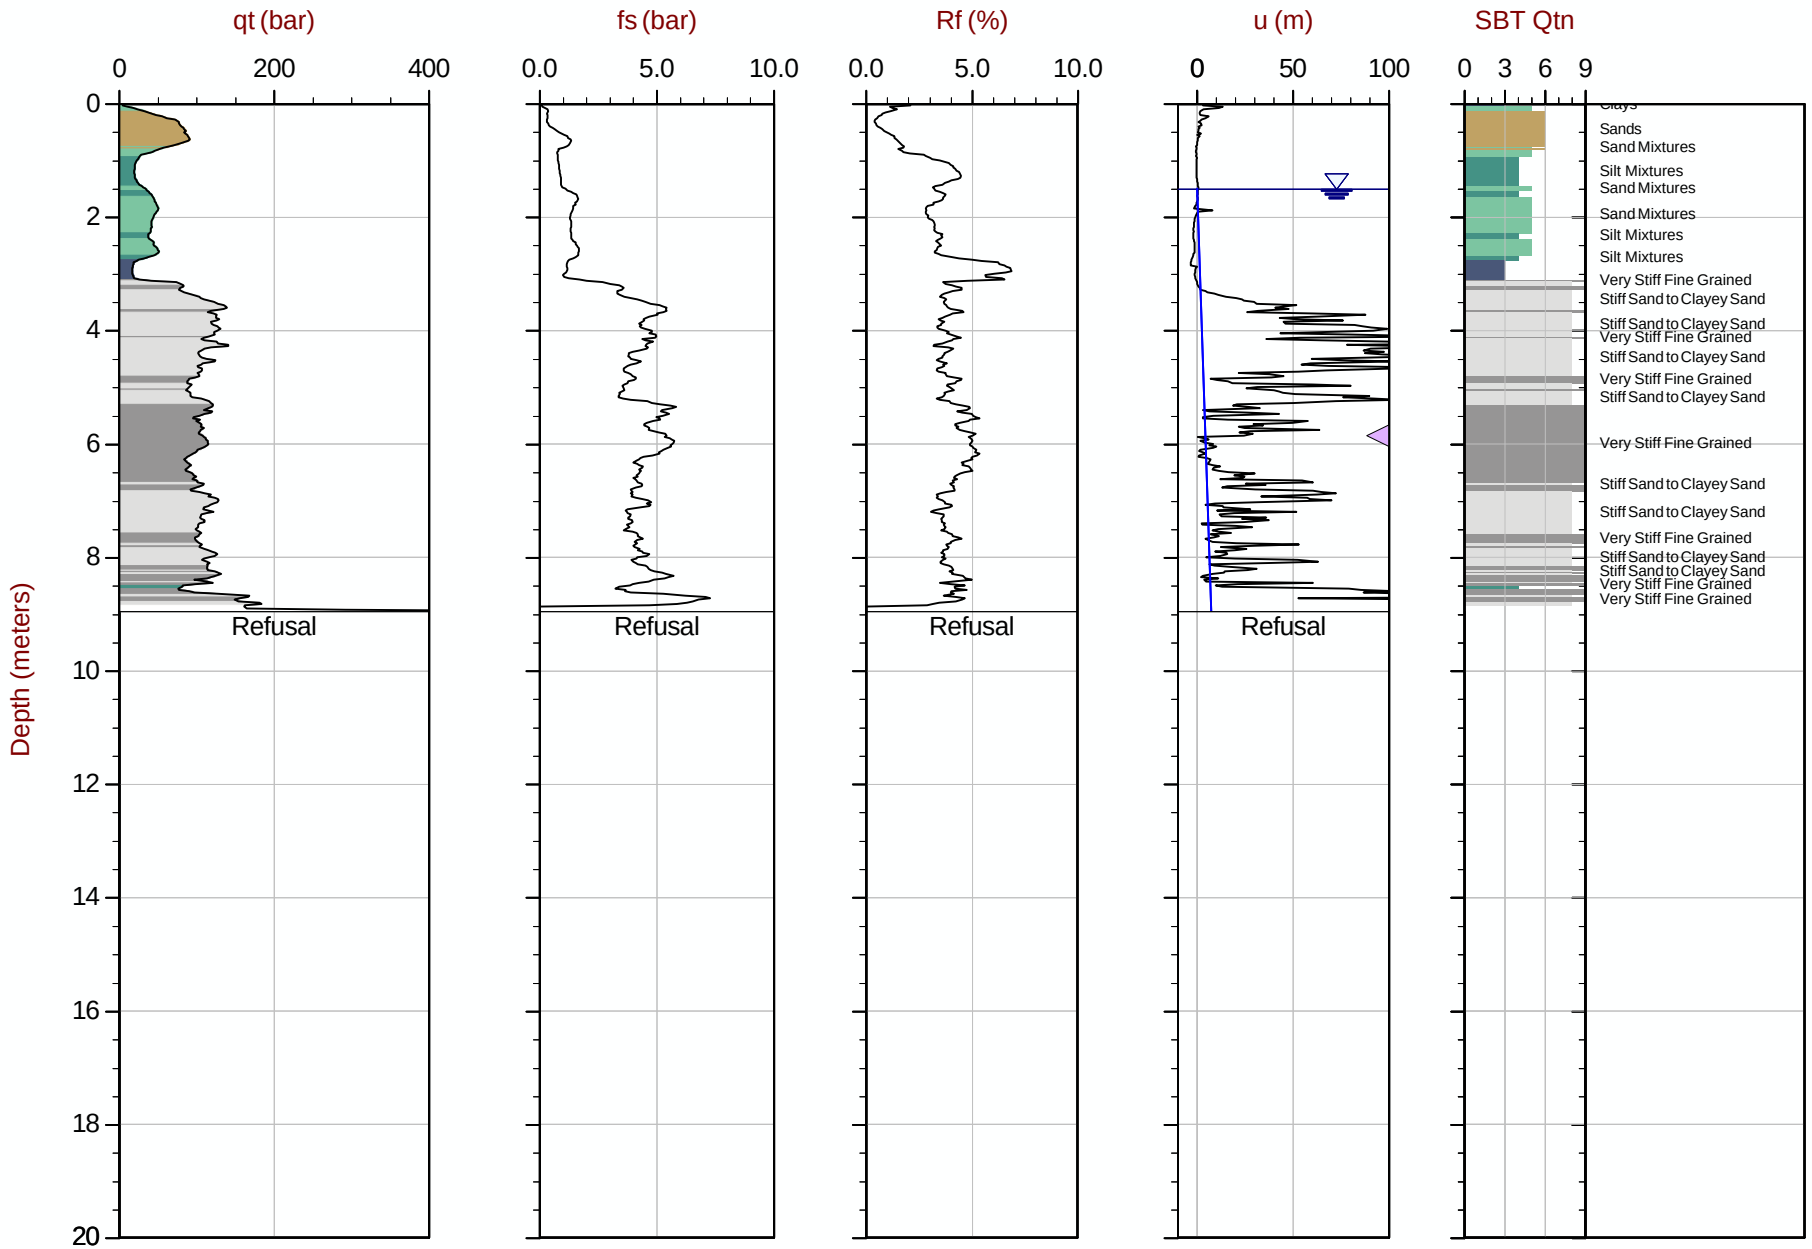

Max Depth: 8.950 m / 29.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT318.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609470m E: 415843m Elev: 772.837m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 07:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT319
Cone: 854:T1500F15U35 Area= 15cm2

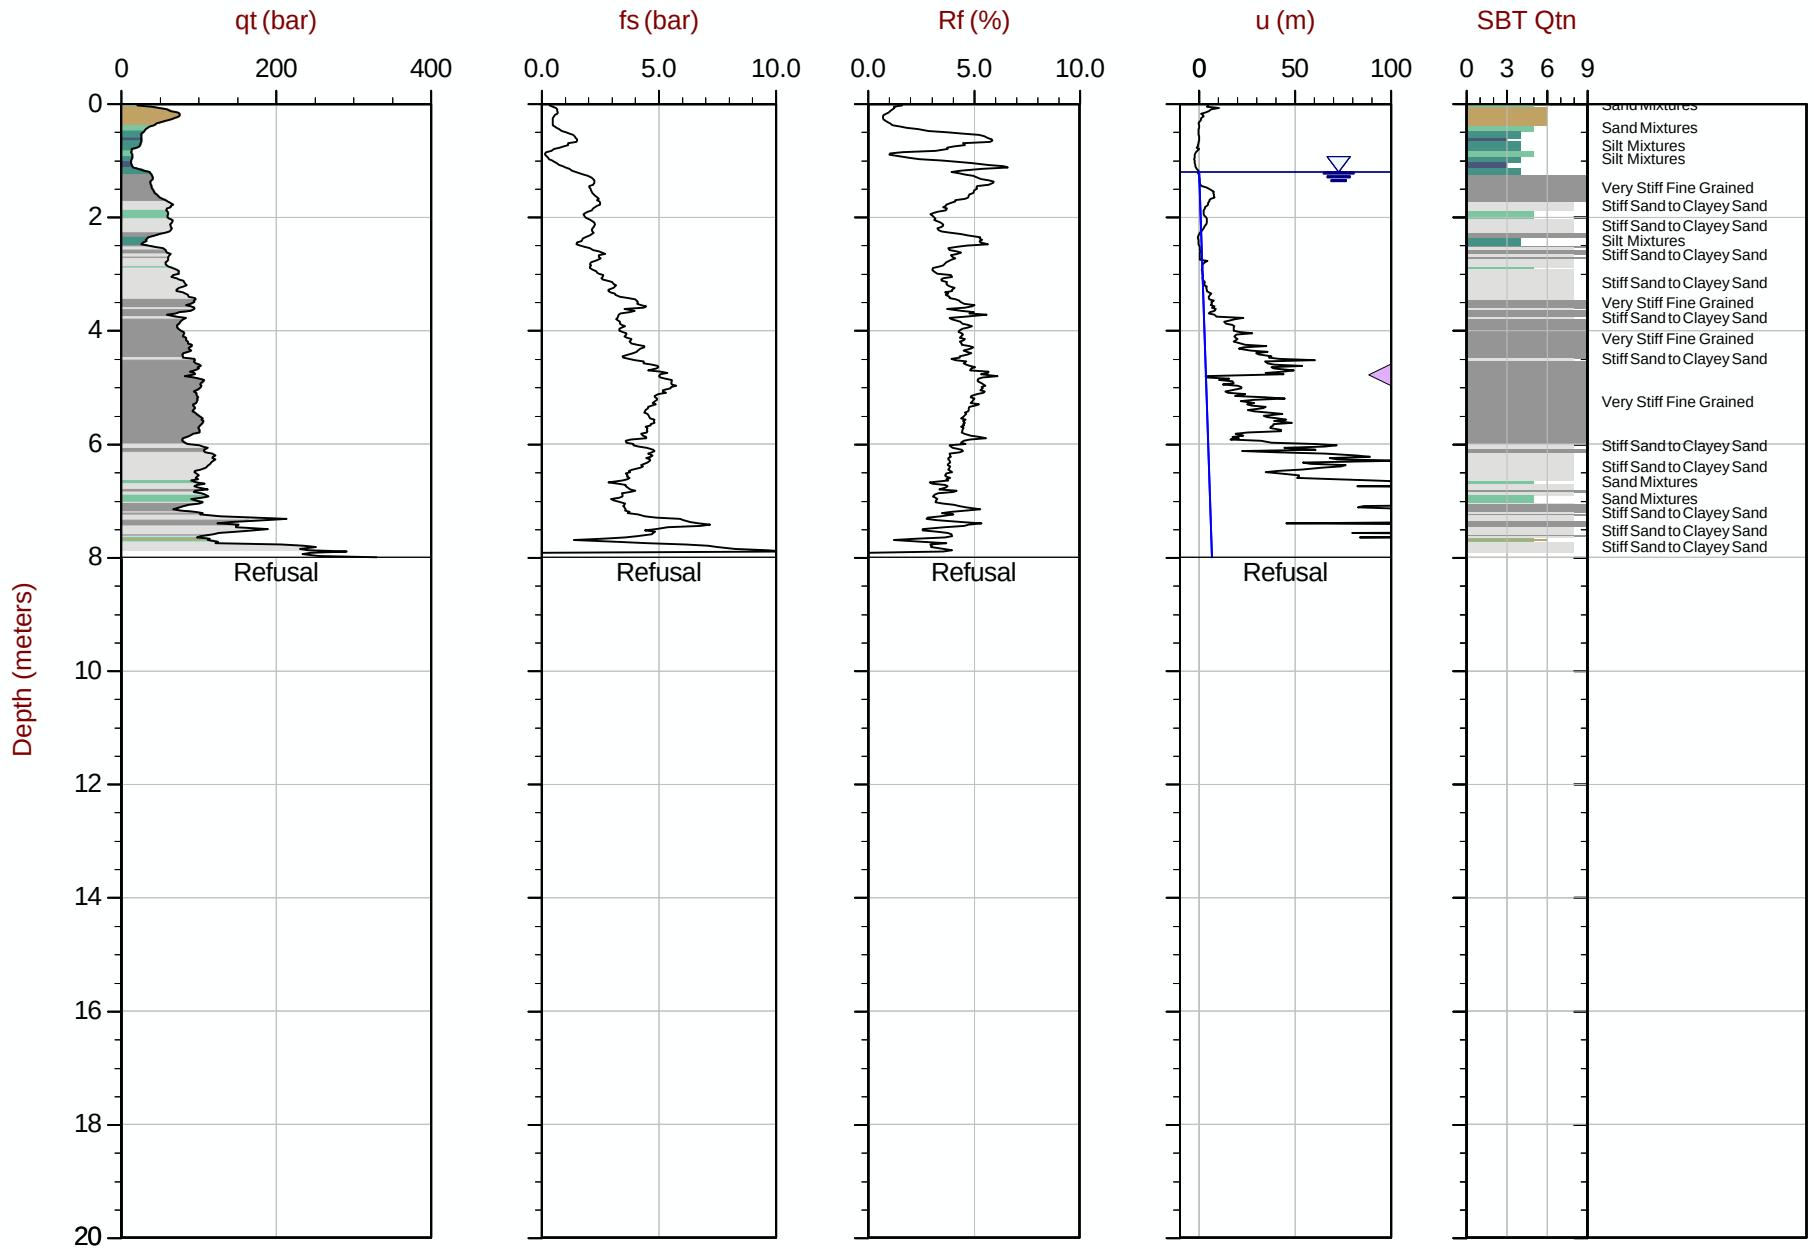

Max Depth: 8.000 m / 26.25 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT319.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609469m E: 415790m Elev: 772.623m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 08:23
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT320
Cone: 854:T1500F15U35 Area= 15cm2

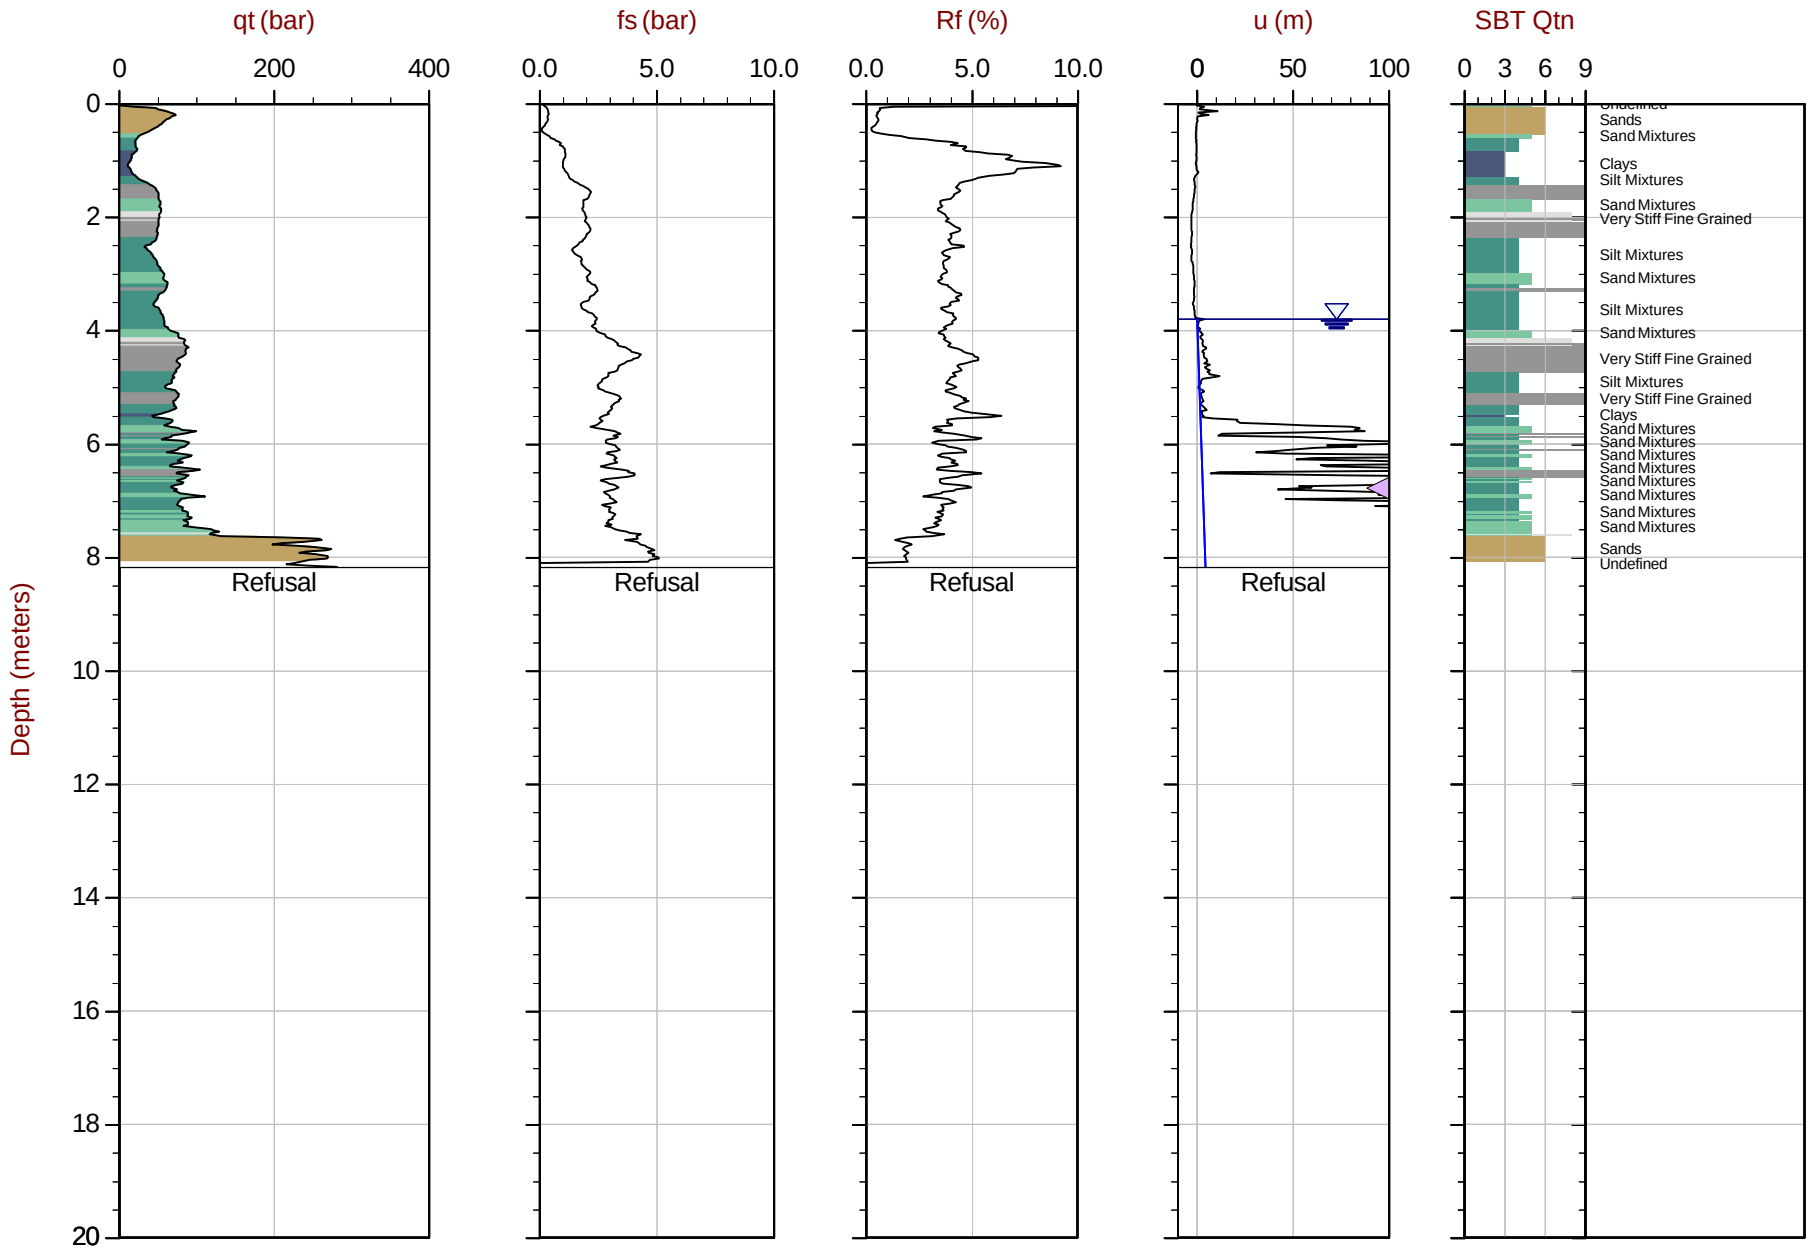

Max Depth: 8.175 m / 26.82 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT320.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609467m E: 415743m Elev: 773.059m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 10:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT321
Cone: 854:T1500F15U35 Area= 15cm2

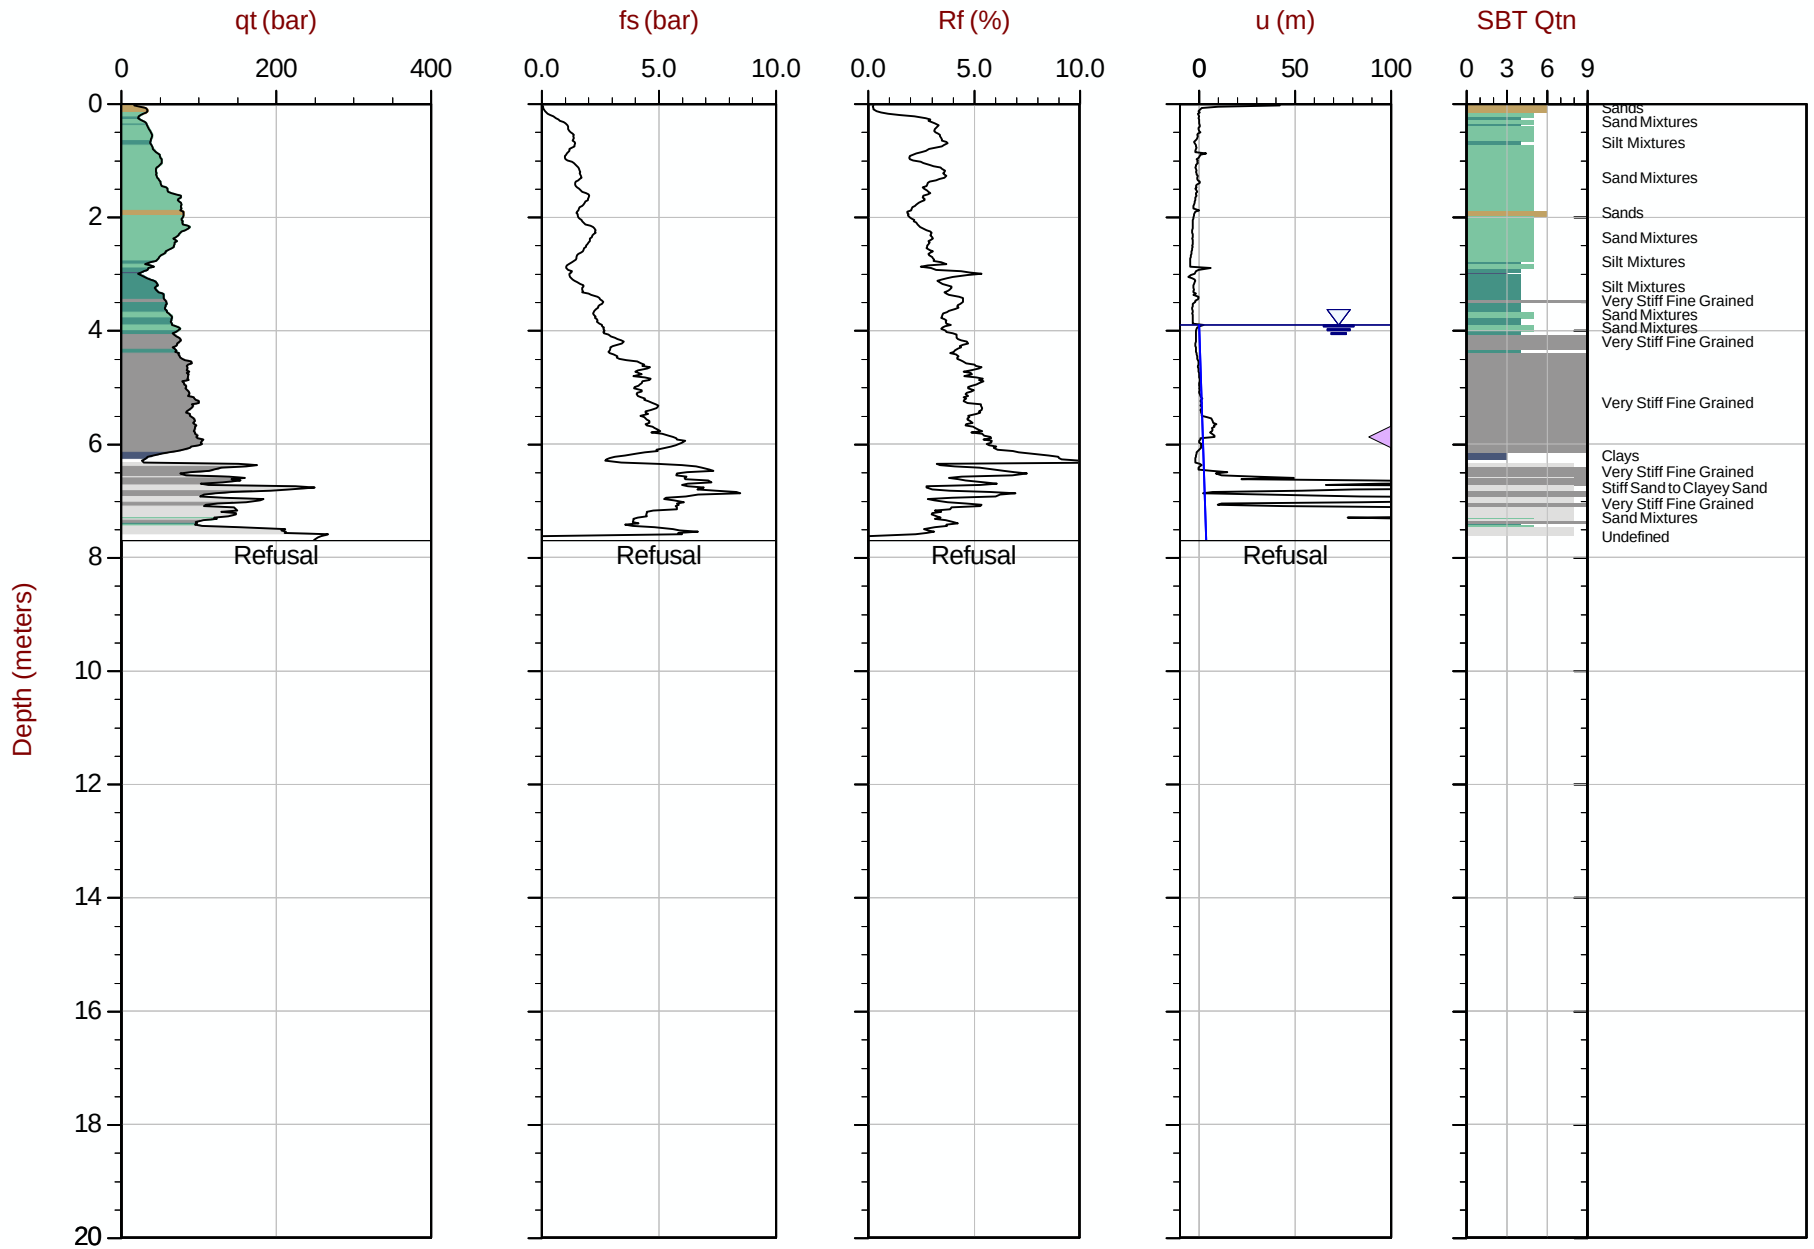

Max Depth: 7.700 m / 25.26 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT321.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609466m E: 415699m Elev: 773.420m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 11:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT322
Cone: 854:T1500F15U35 Area= 15cm2

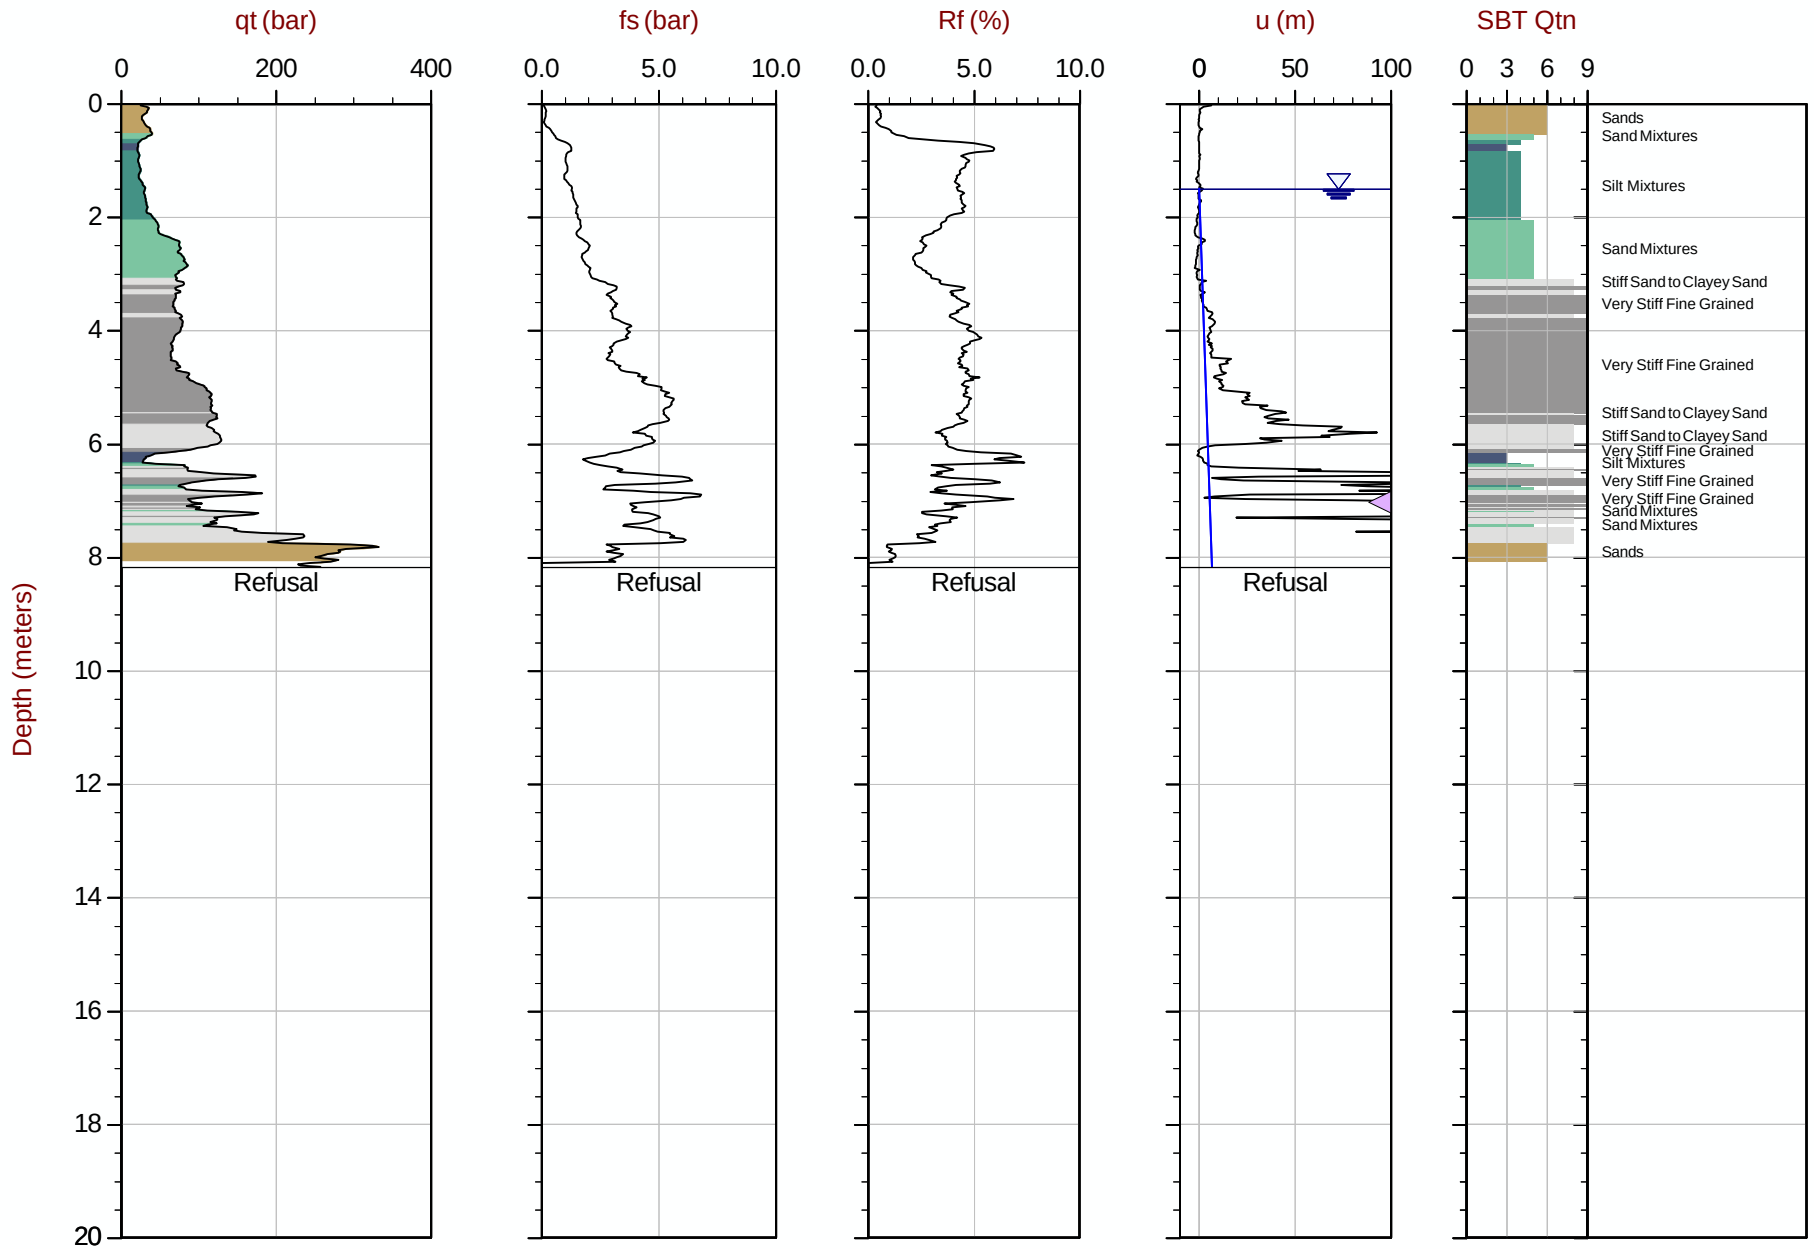

Max Depth: 8.175 m / 26.82 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT322.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609465m E: 415643m Elev: 773.799m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT323
Cone: 854:T1500F15U35 Area= 15cm2

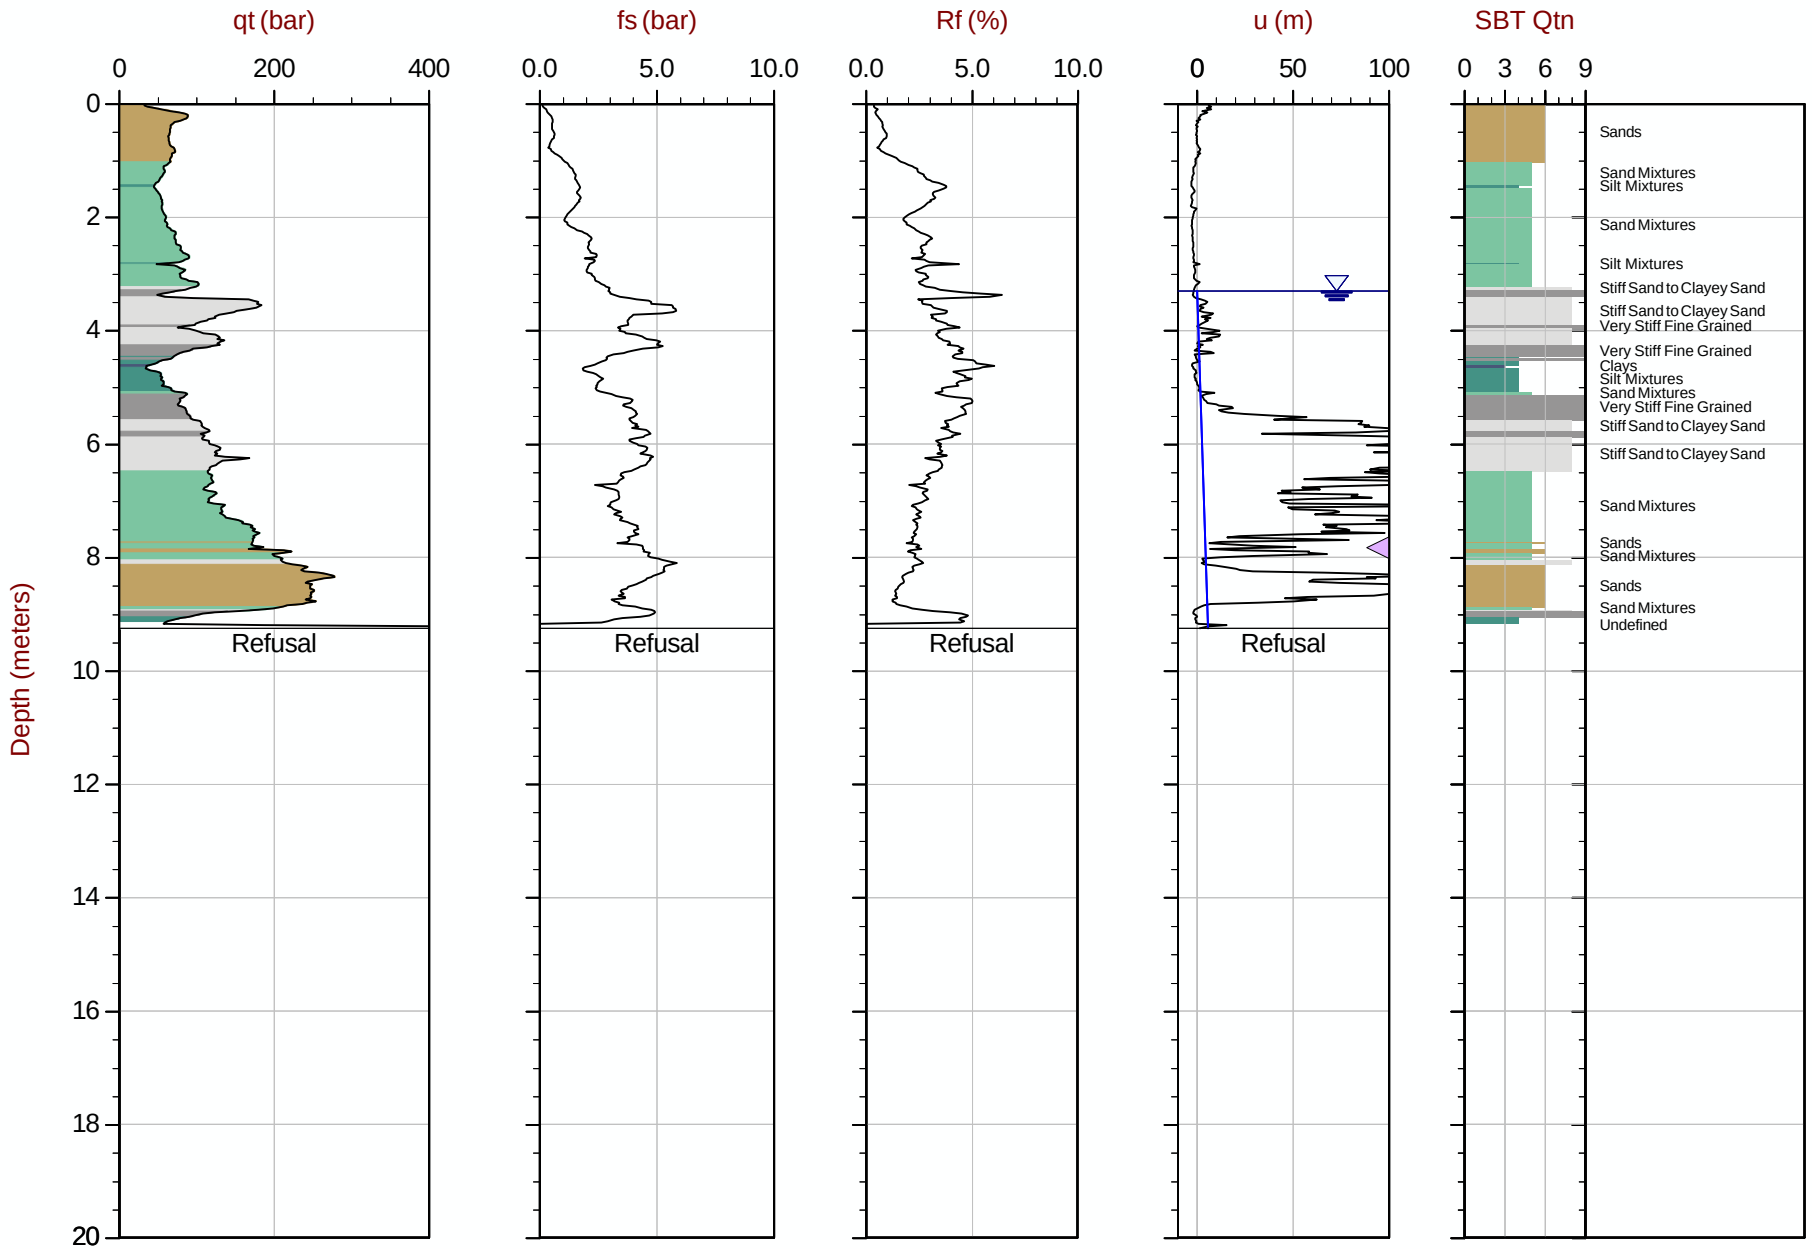

Max Depth: 9.250 m / 30.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT323.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609463m E: 415593m Elev: 774.098m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 13:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT324
Cone: 854:T1500F15U35 Area= 15cm2

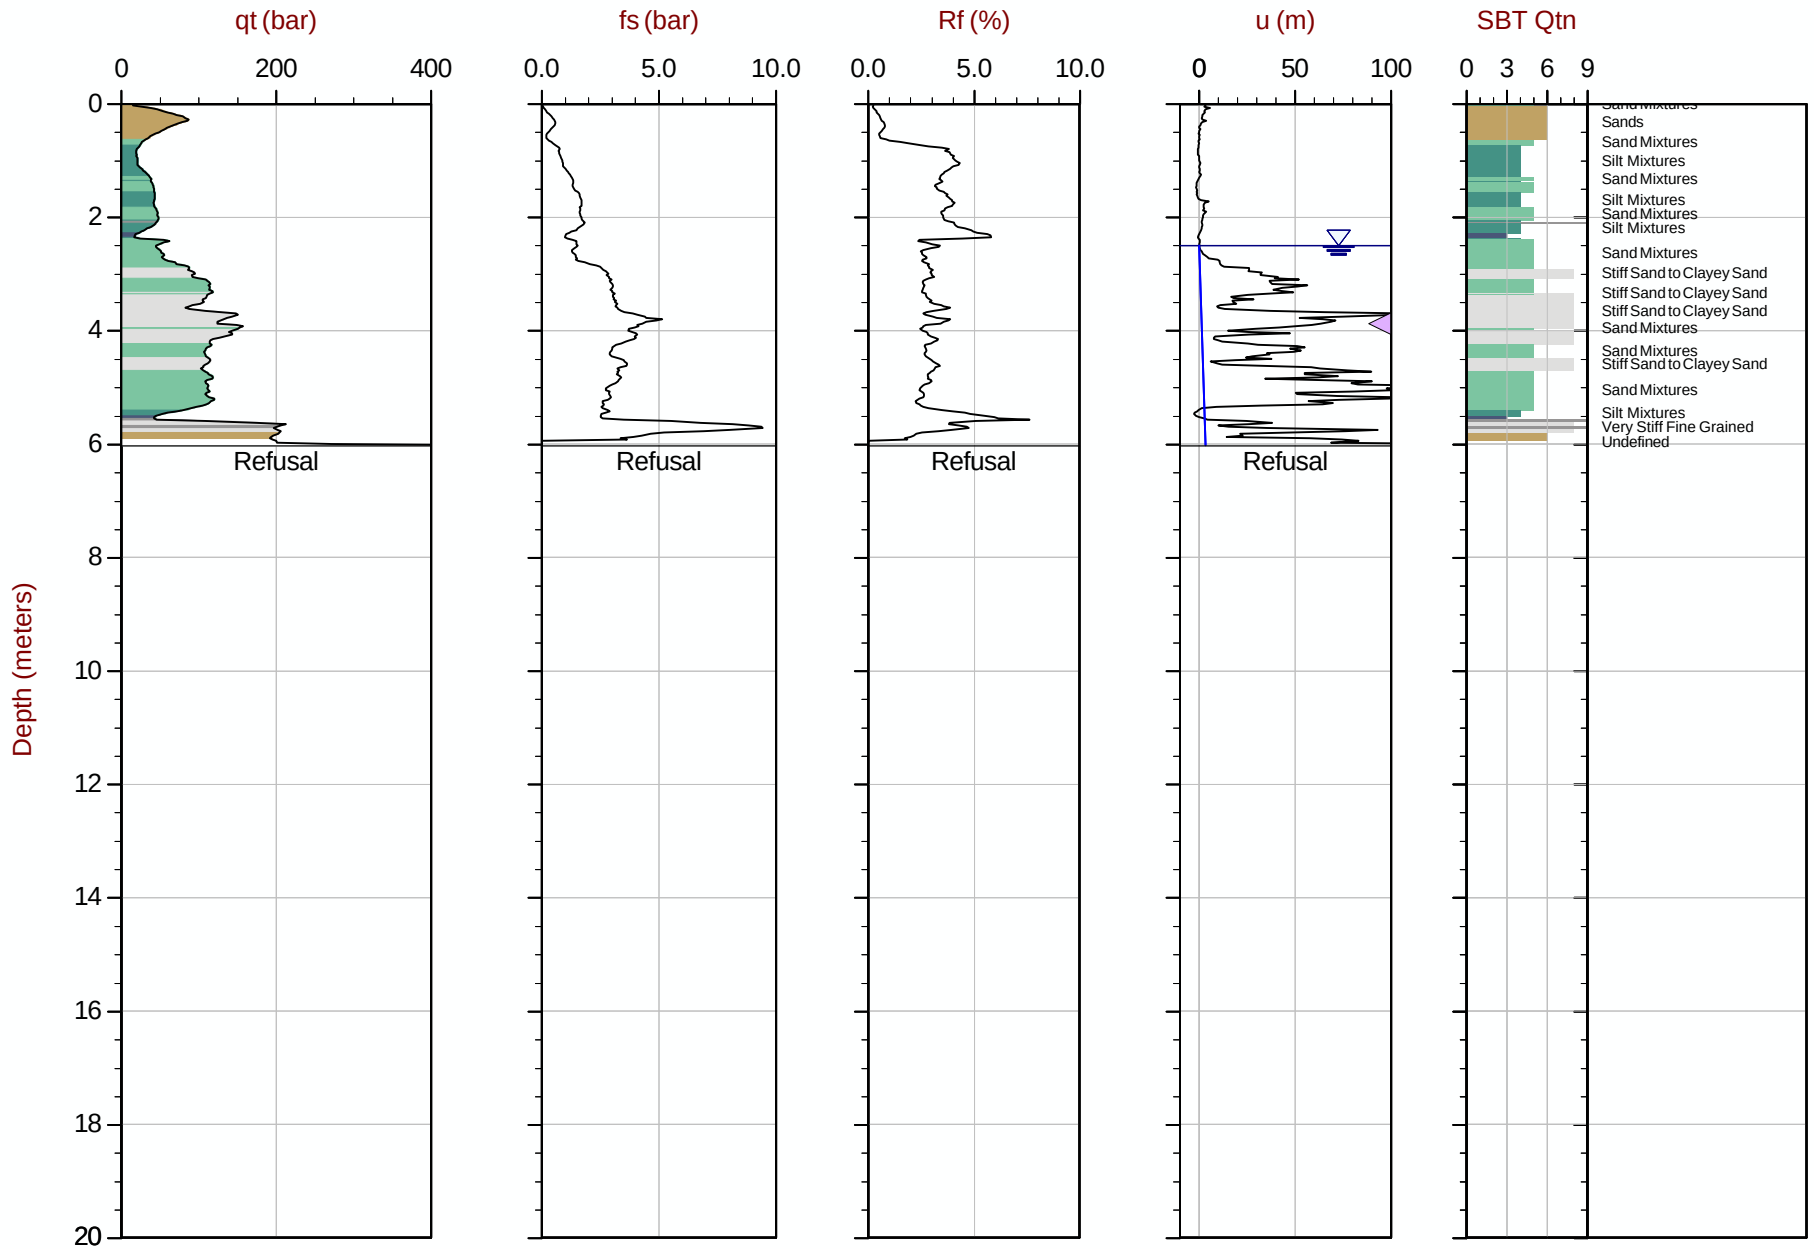

Max Depth: 6.025 m / 19.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT324.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609462m E: 415543m Elev: 773.957m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 16:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT325
Cone: 854:T1500F15U35 Area= 15cm2

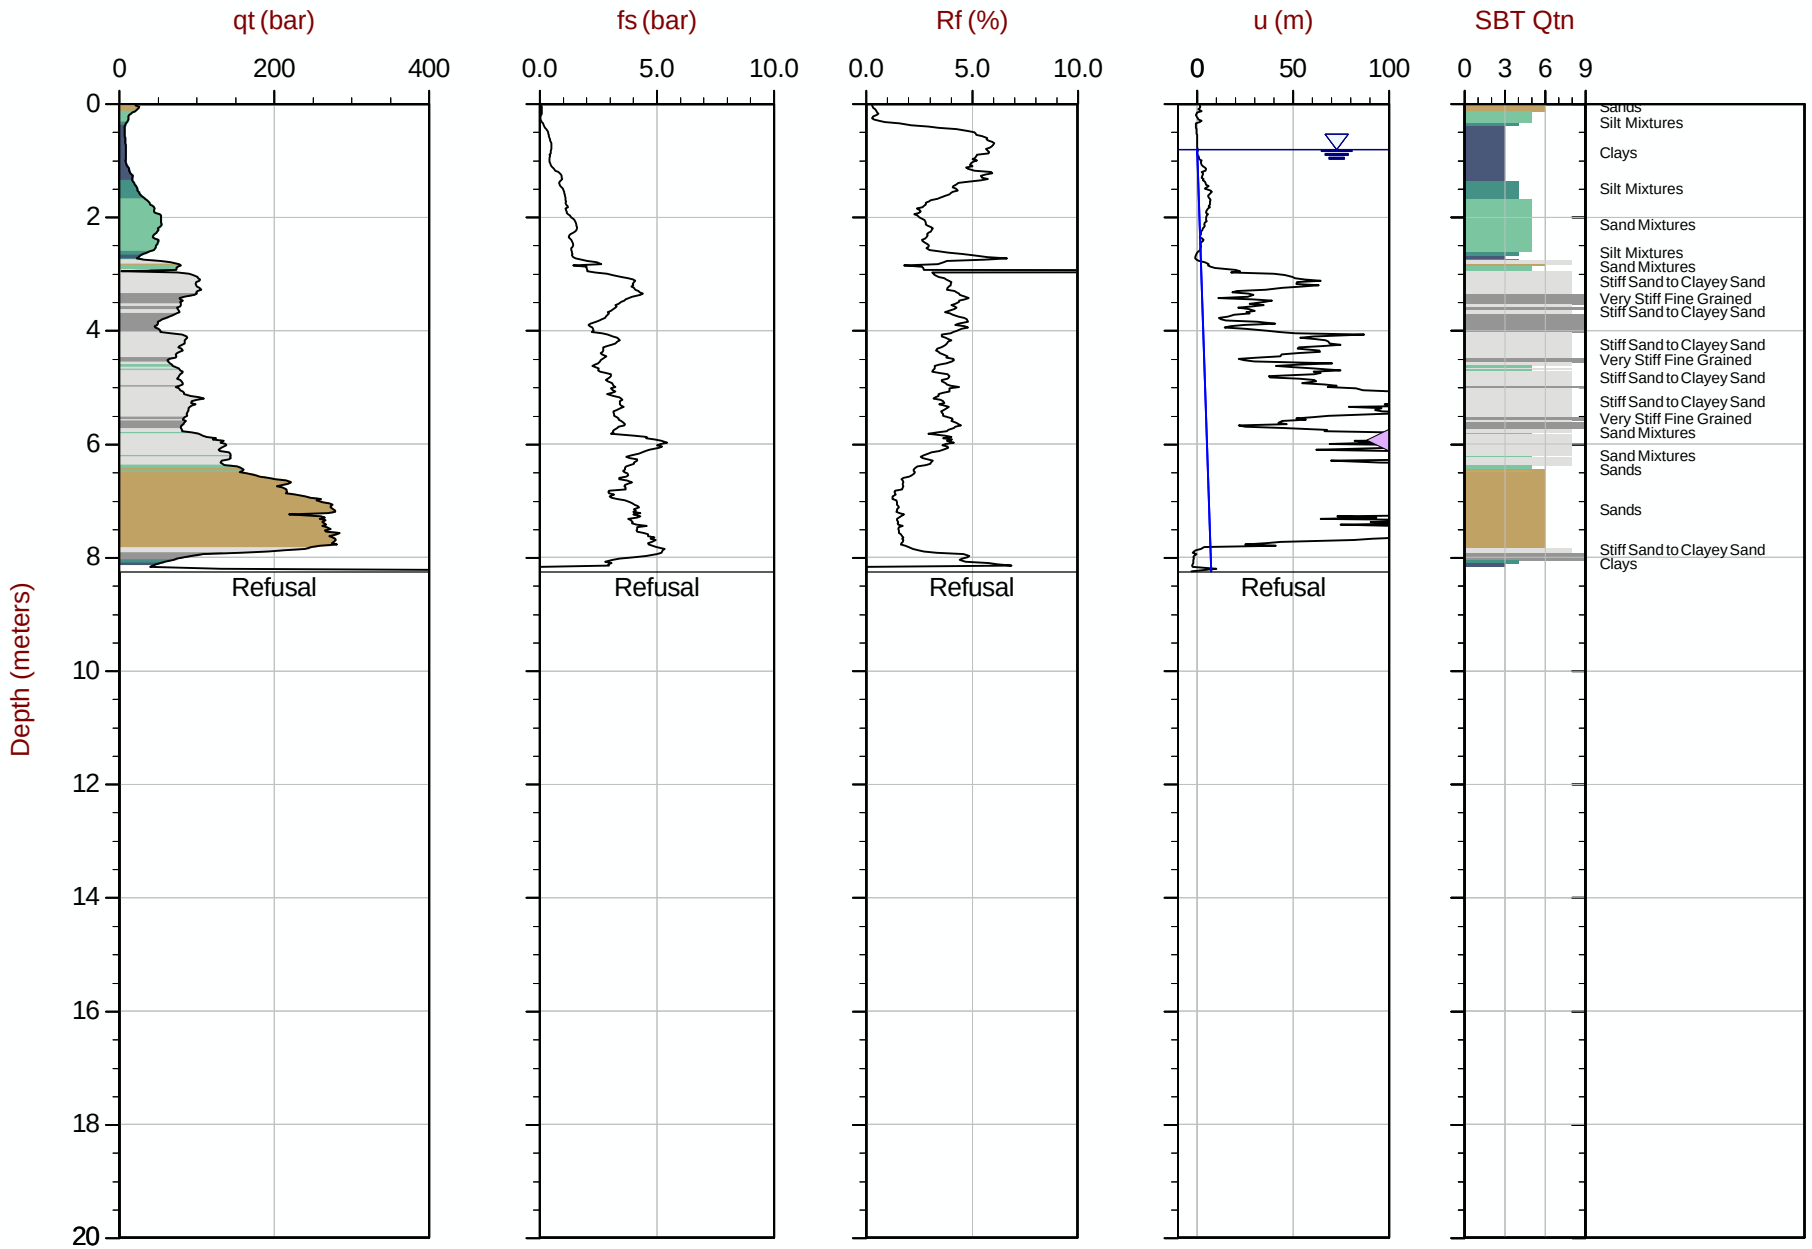

Max Depth: 8.250 m / 27.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT325.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609461m E: 415490m Elev: 774.165m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 07:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT326
Cone: 854:T1500F15U35 Area= 15cm2

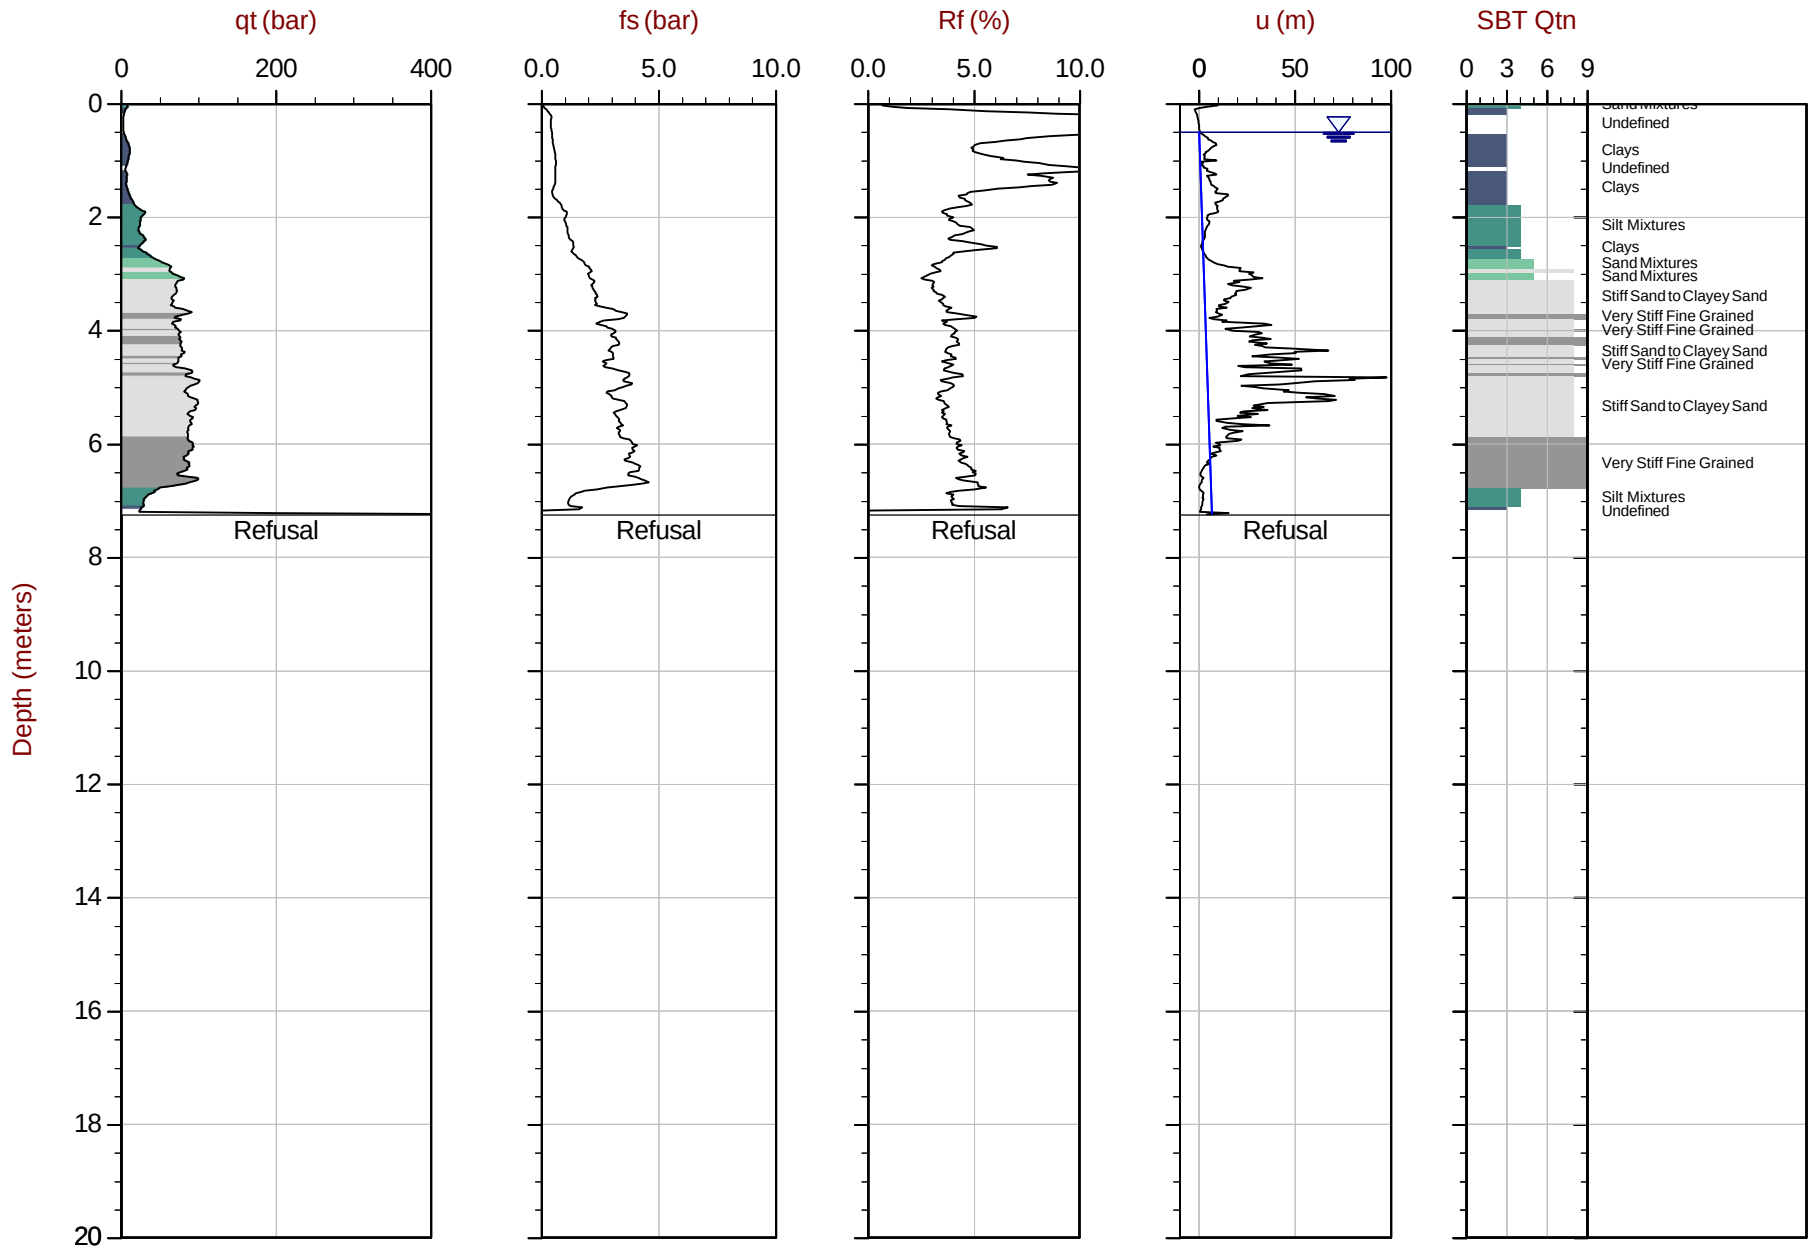

Max Depth: 7.250 m / 23.79 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT326.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609459m E: 415443m Elev: 773.975m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 09:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT327
Cone: 854:T1500F15U35 Area= 15cm2

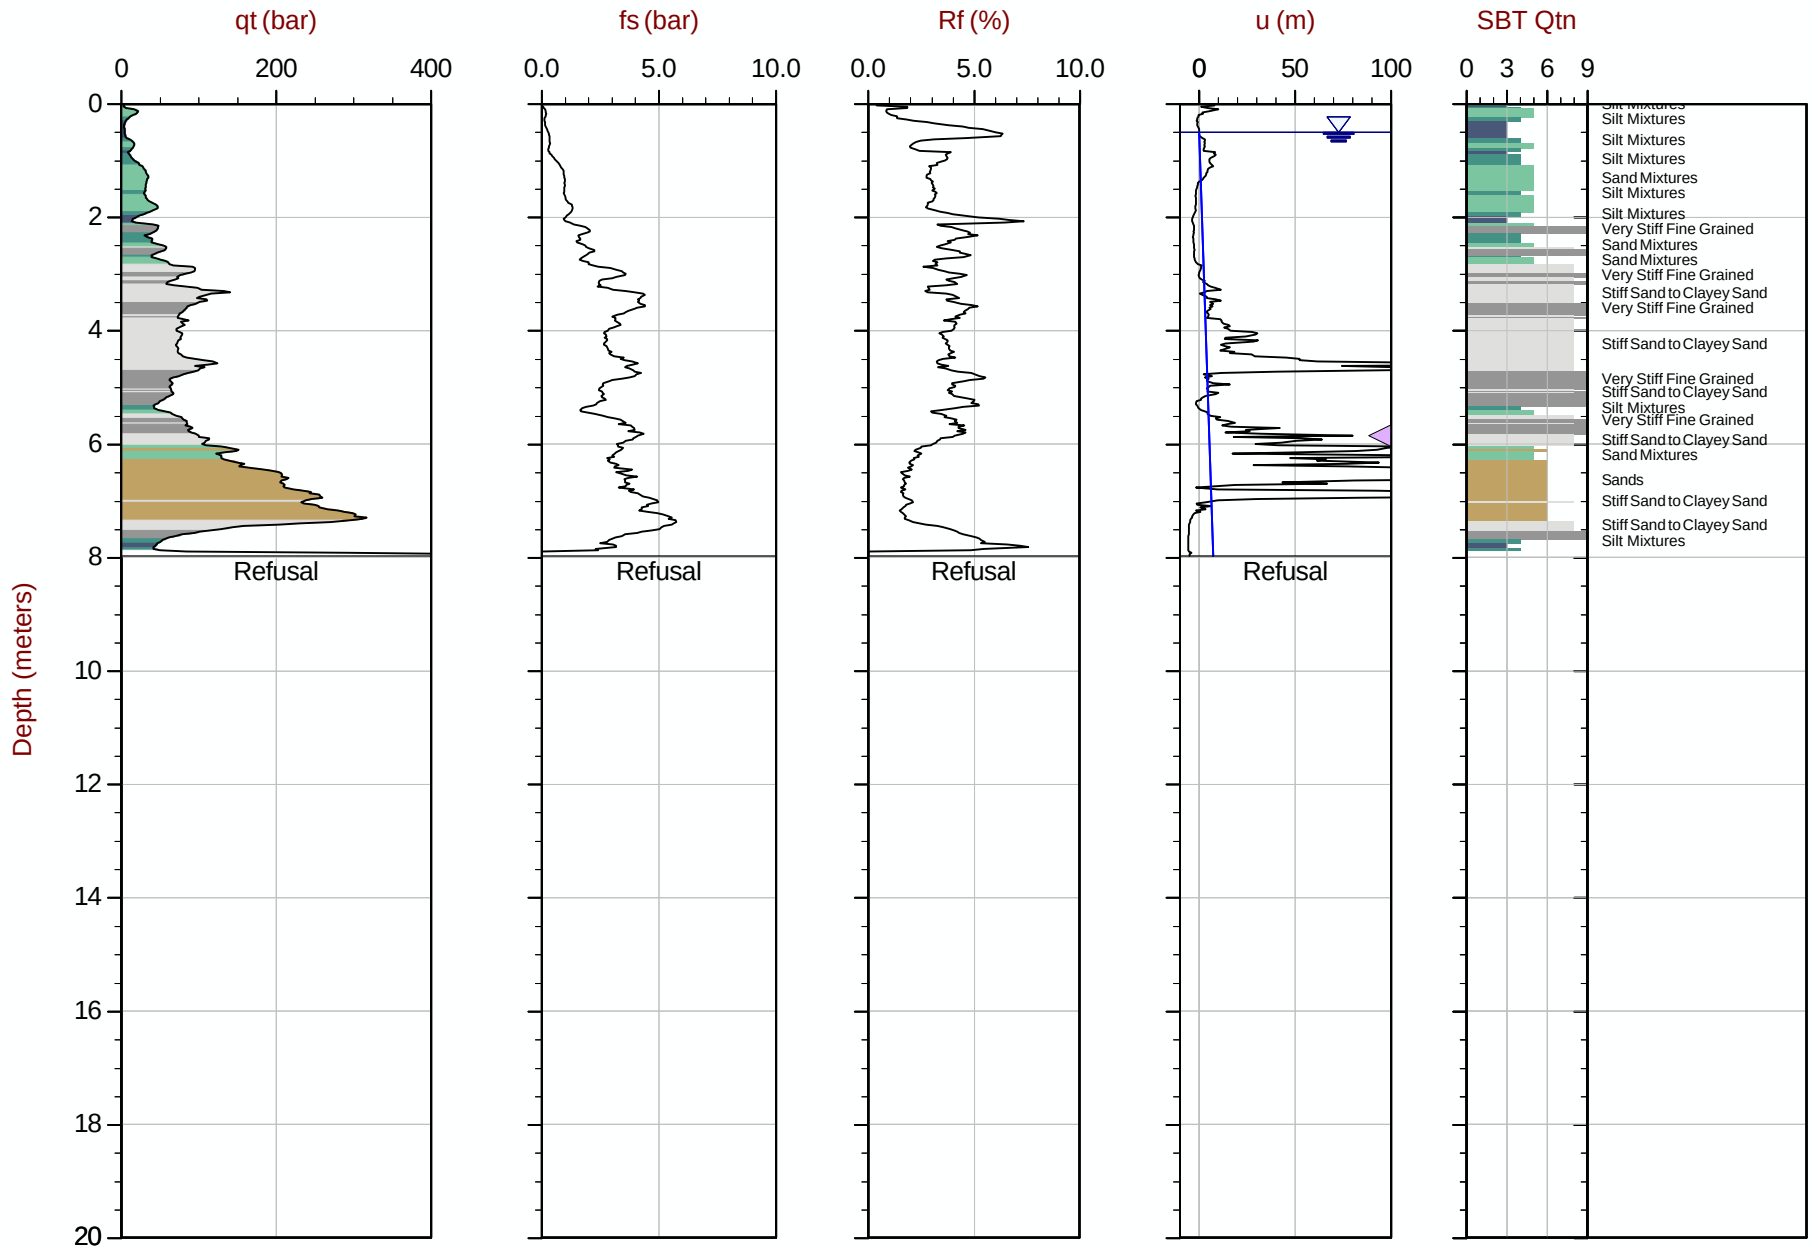

Max Depth: 7.975 m / 26.16 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT327.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609458m E: 415394m Elev: 774.321m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 10:28
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT328
Cone: 854:T1500F15U35 Area= 15cm2

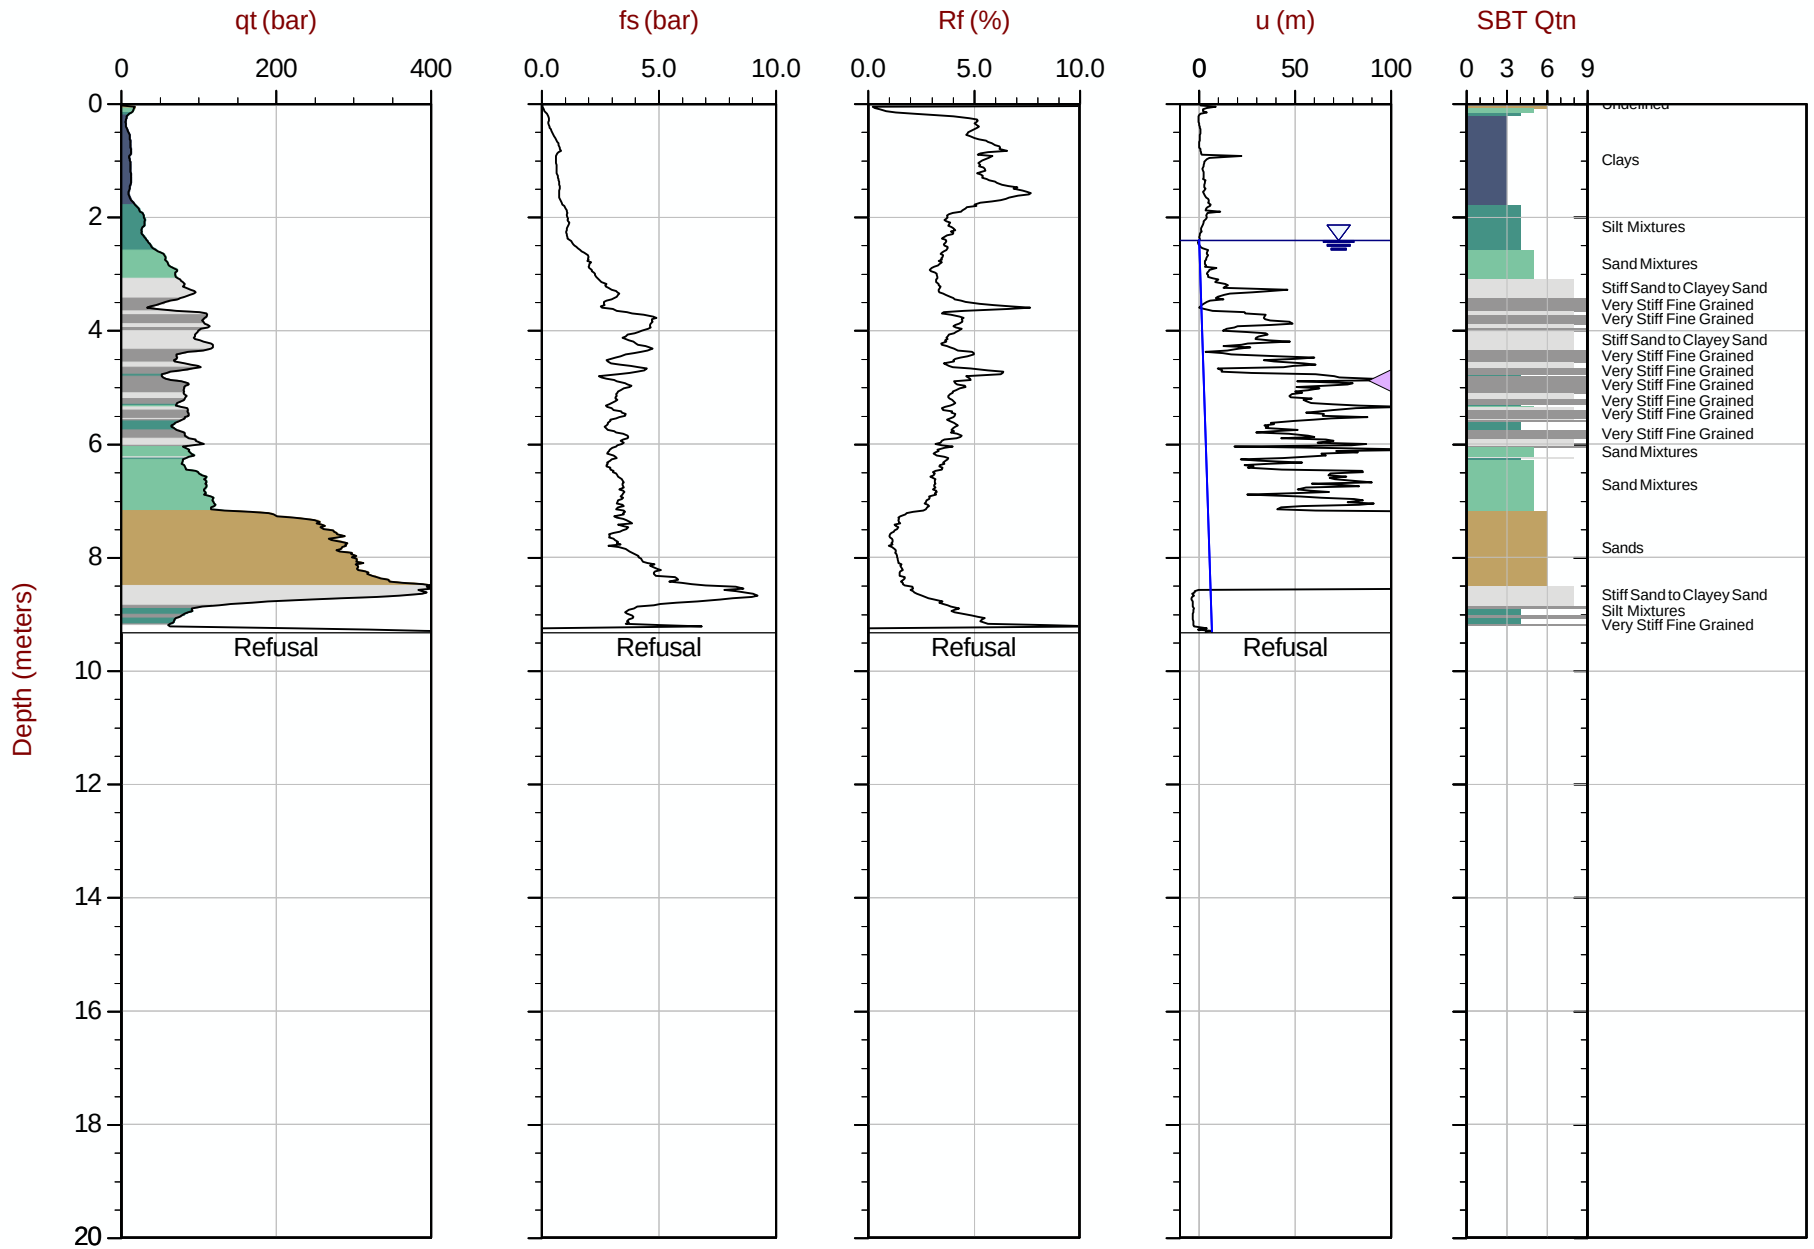

Max Depth: 9.325 m / 30.59 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT328.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609457m E: 415343m Elev: 774.726m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 12:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT329
Cone: 854:T1500F15U35 Area= 15cm2

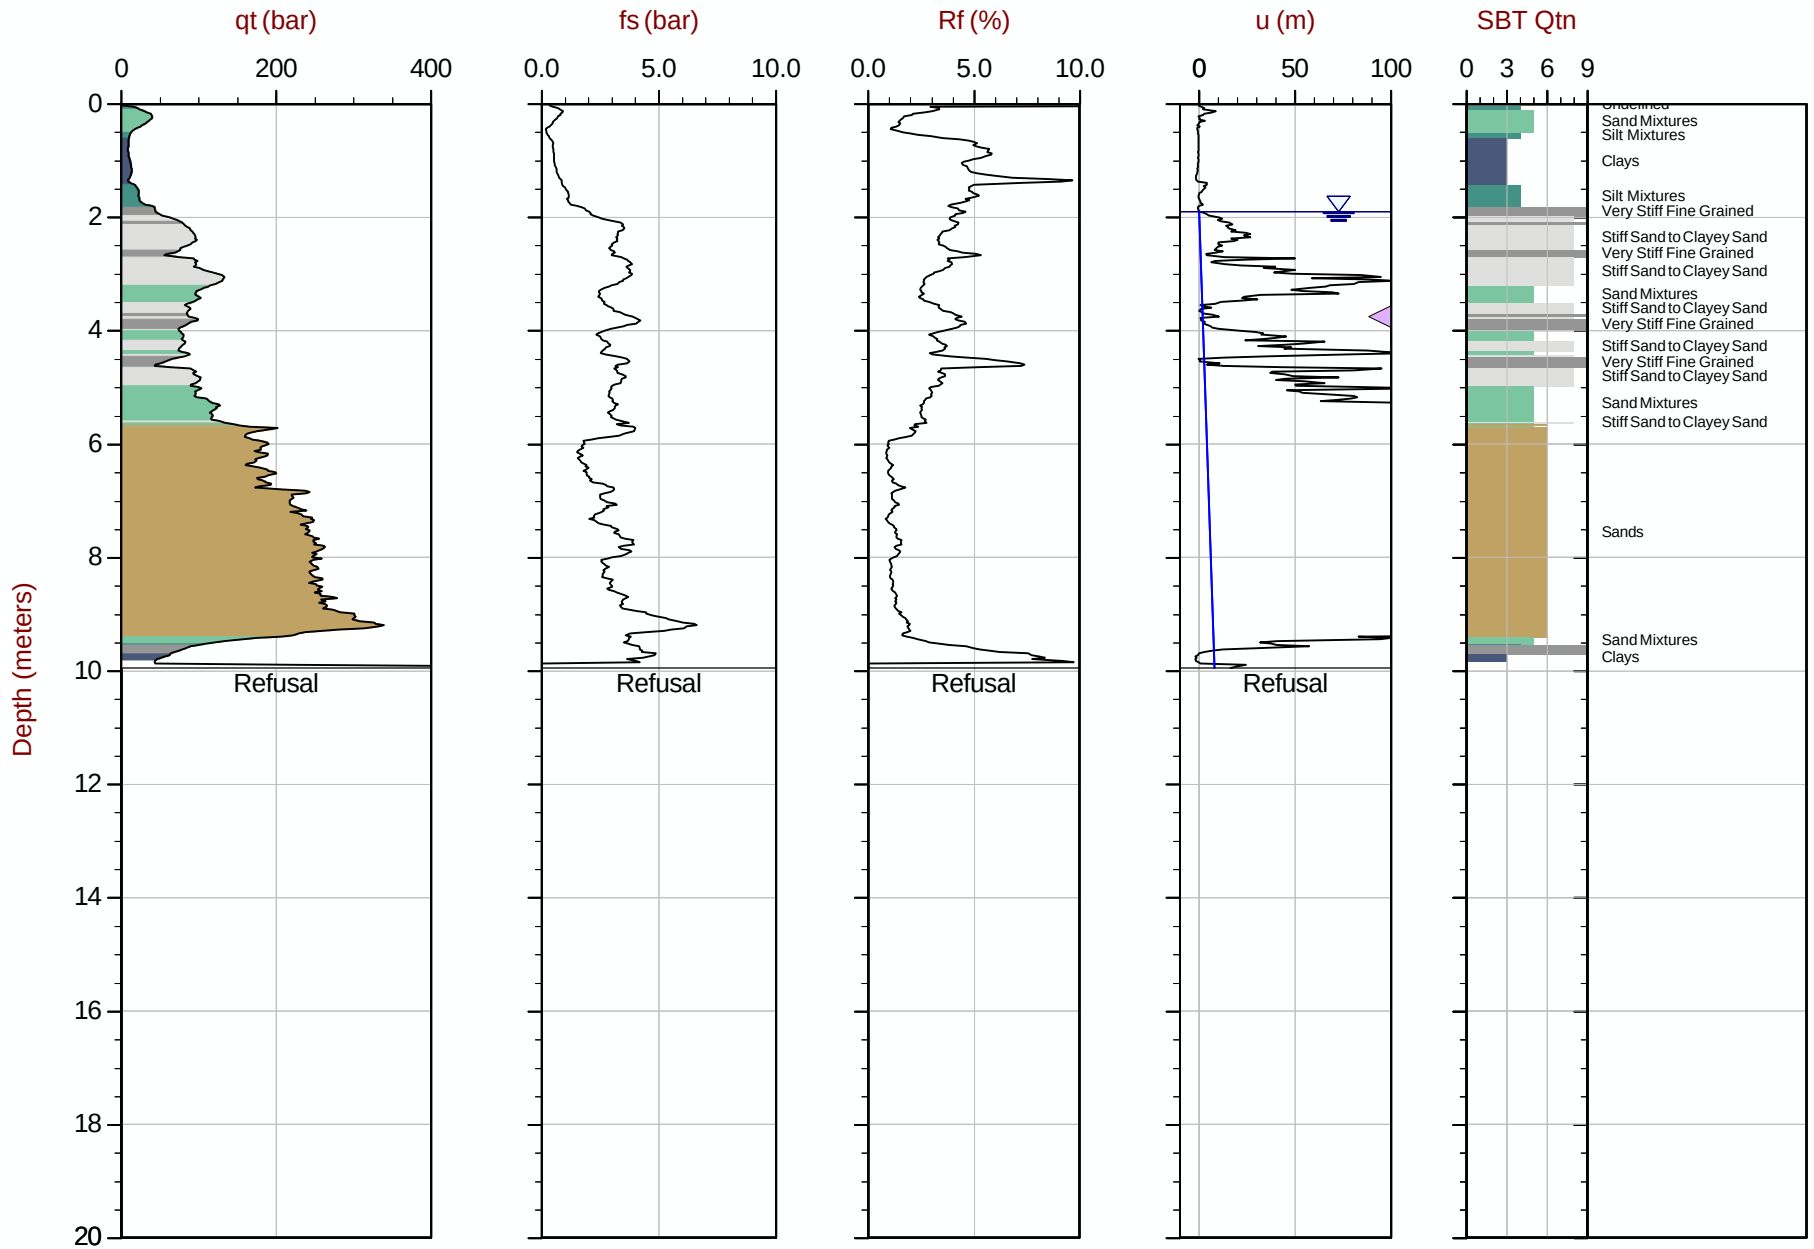

Max Depth: 9.950 m / 32.64 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT329.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609456m E: 415294m Elev: 775.162m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 14:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT330
Cone: 854:T1500F15U35 Area= 15cm2

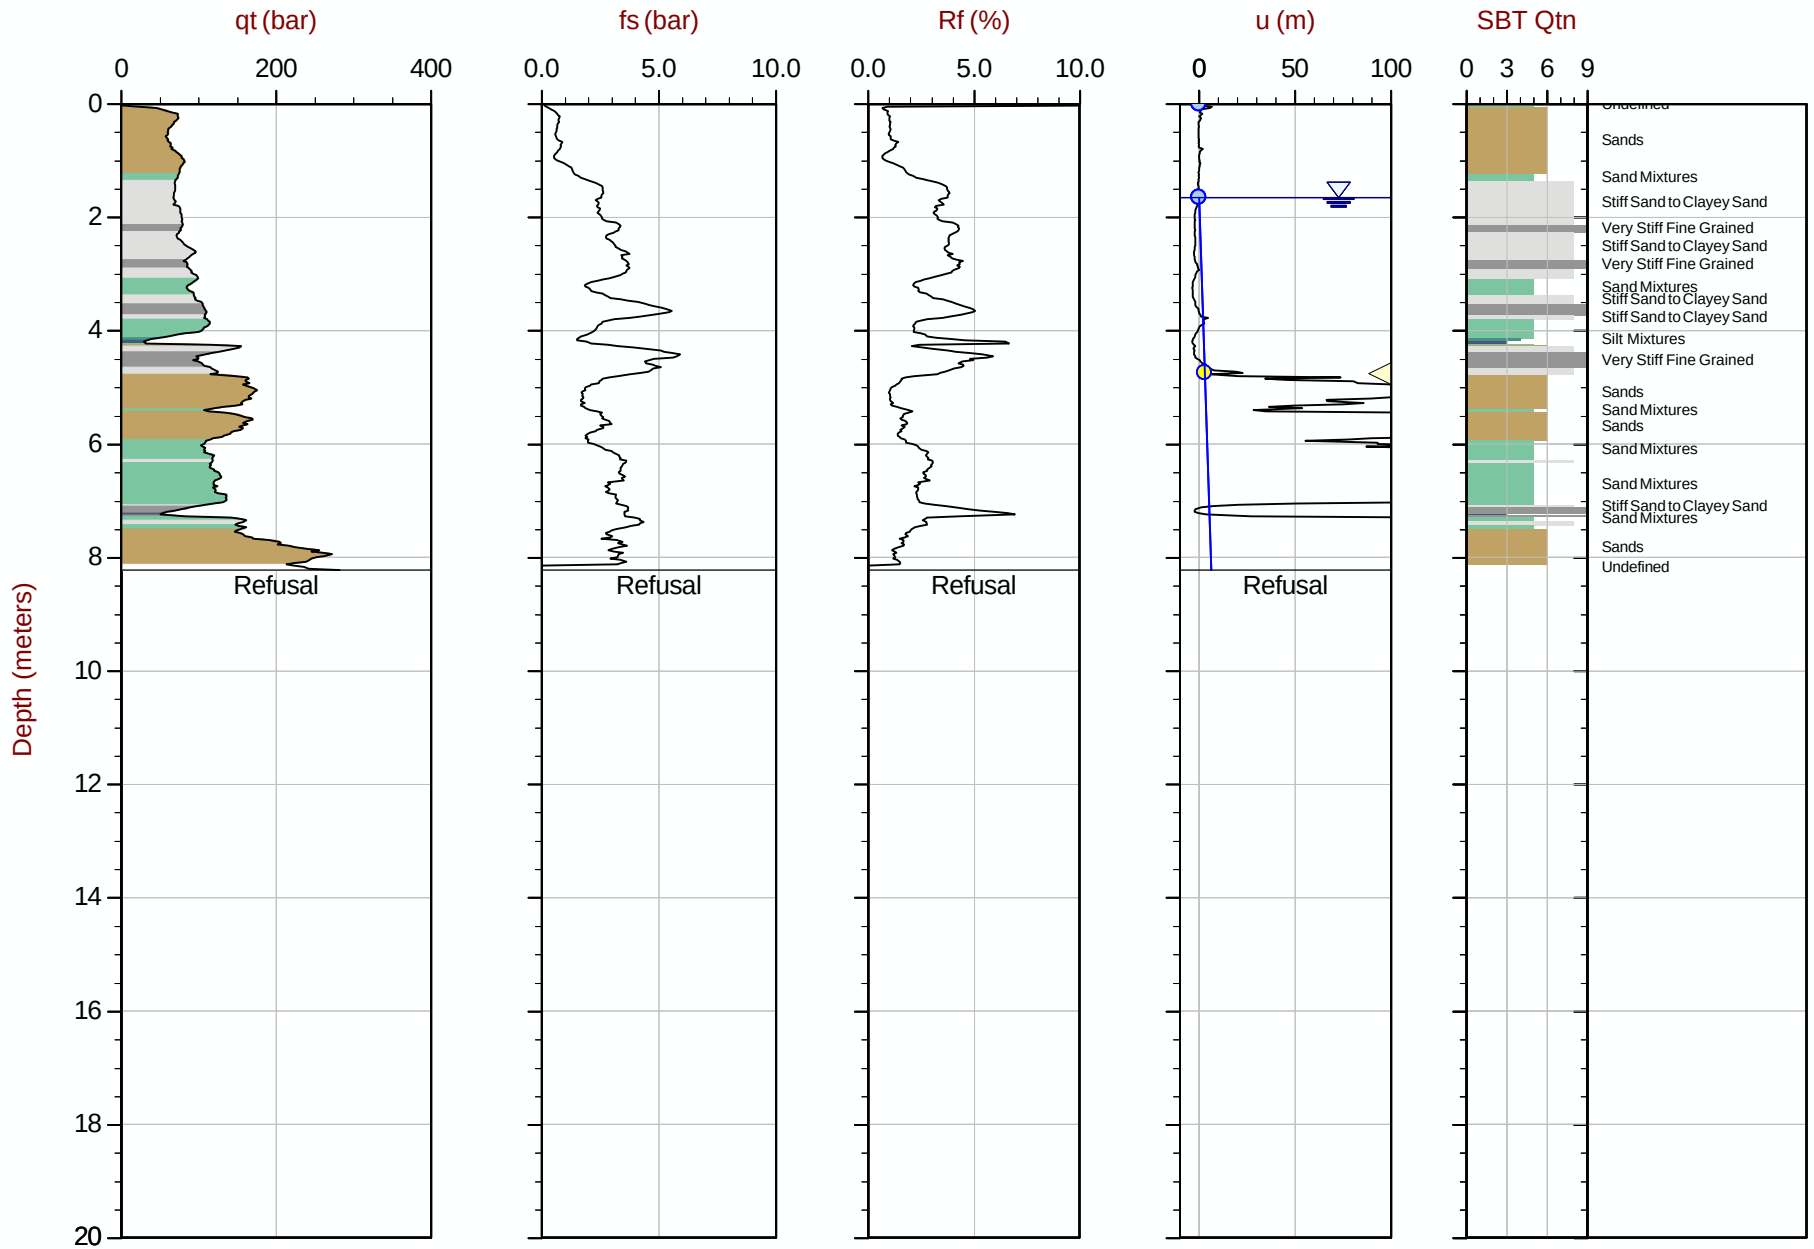

Max Depth: 8.225 m / 26.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT330.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609456m E: 415240m Elev: 776.805m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 16:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT331
Cone: 854:T1500F15U35 Area= 15cm2

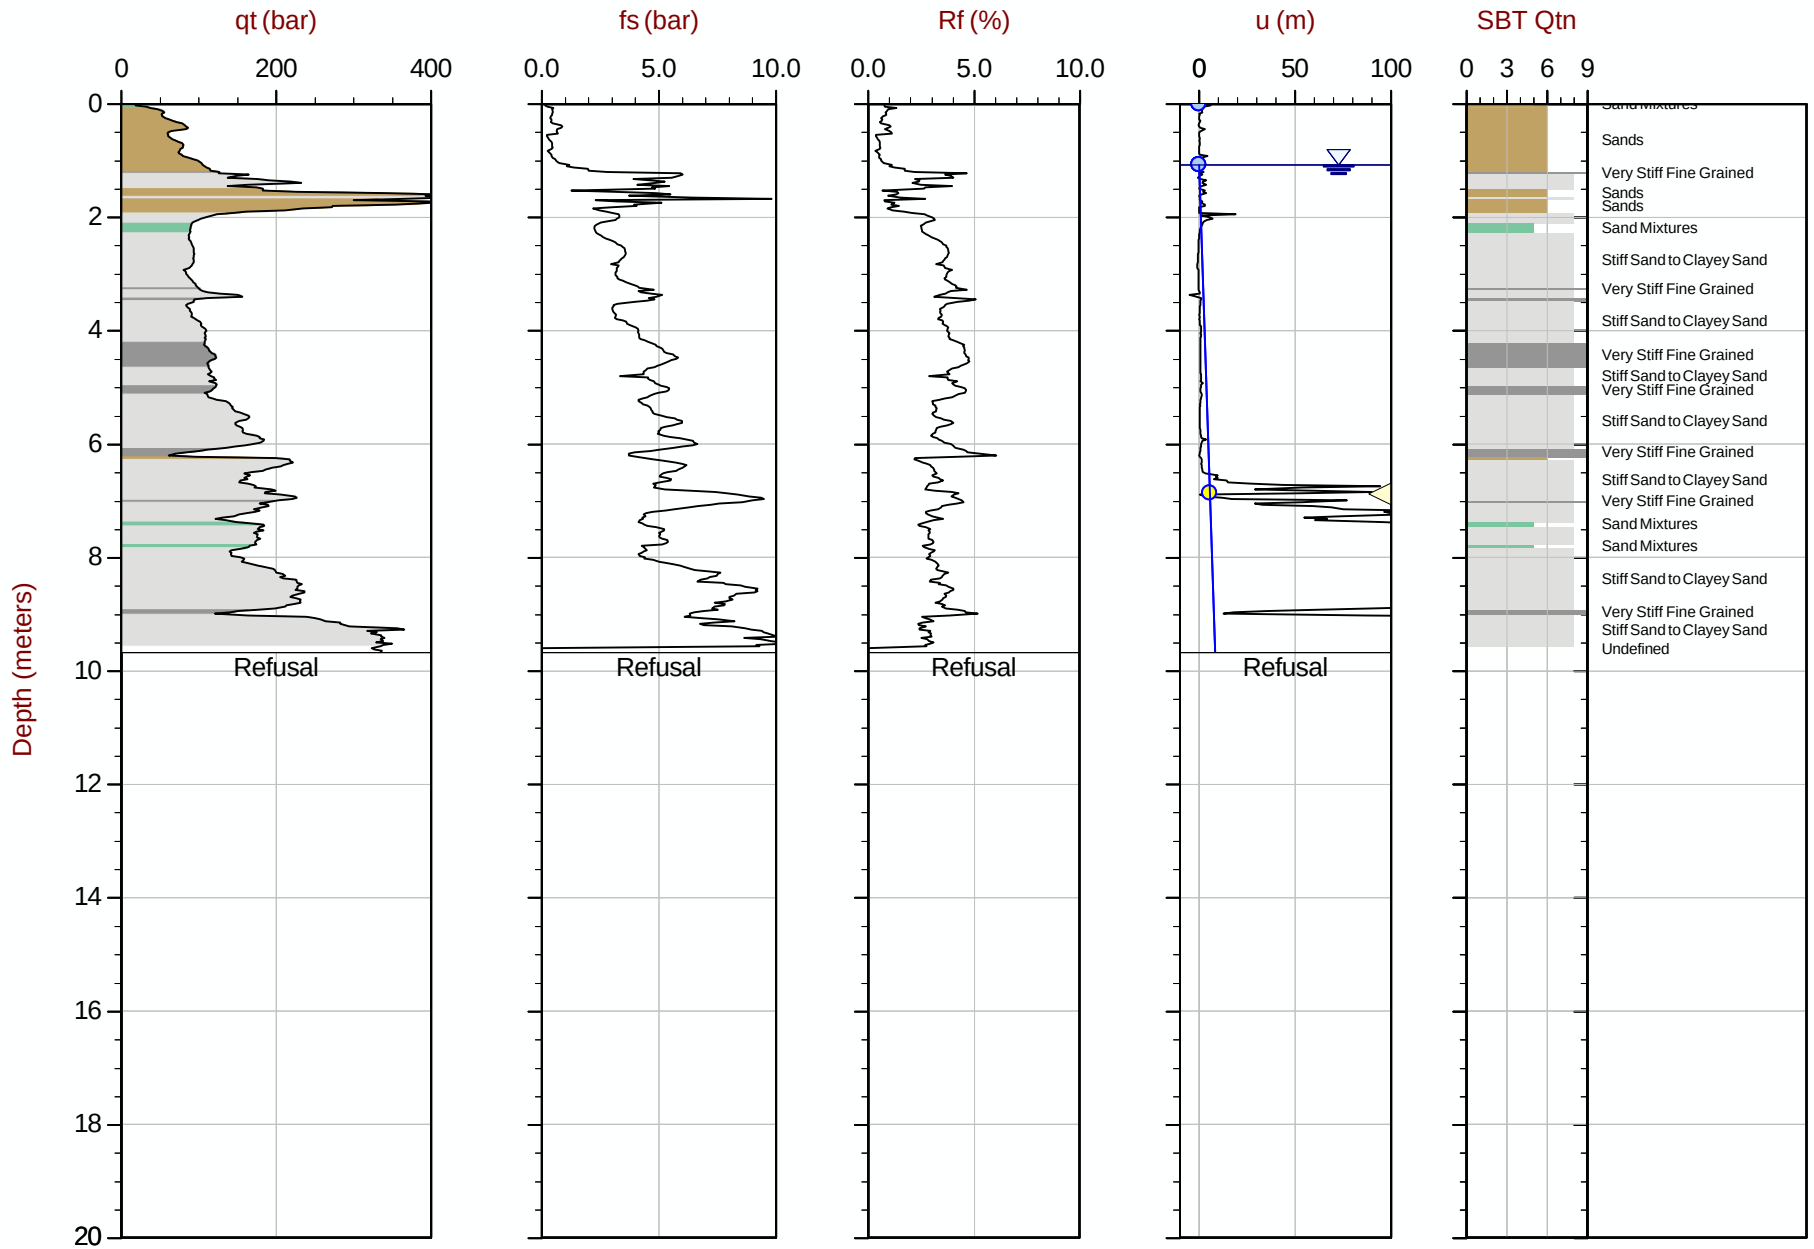

Max Depth: 9.675 m / 31.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT331.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609455m E: 415194m Elev: 778.712m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 07:02
Site: Brooks, Alberta

Sounding: RCPT22-22CPT332
Cone: 854:T1500F15U35 Area= 15cm2

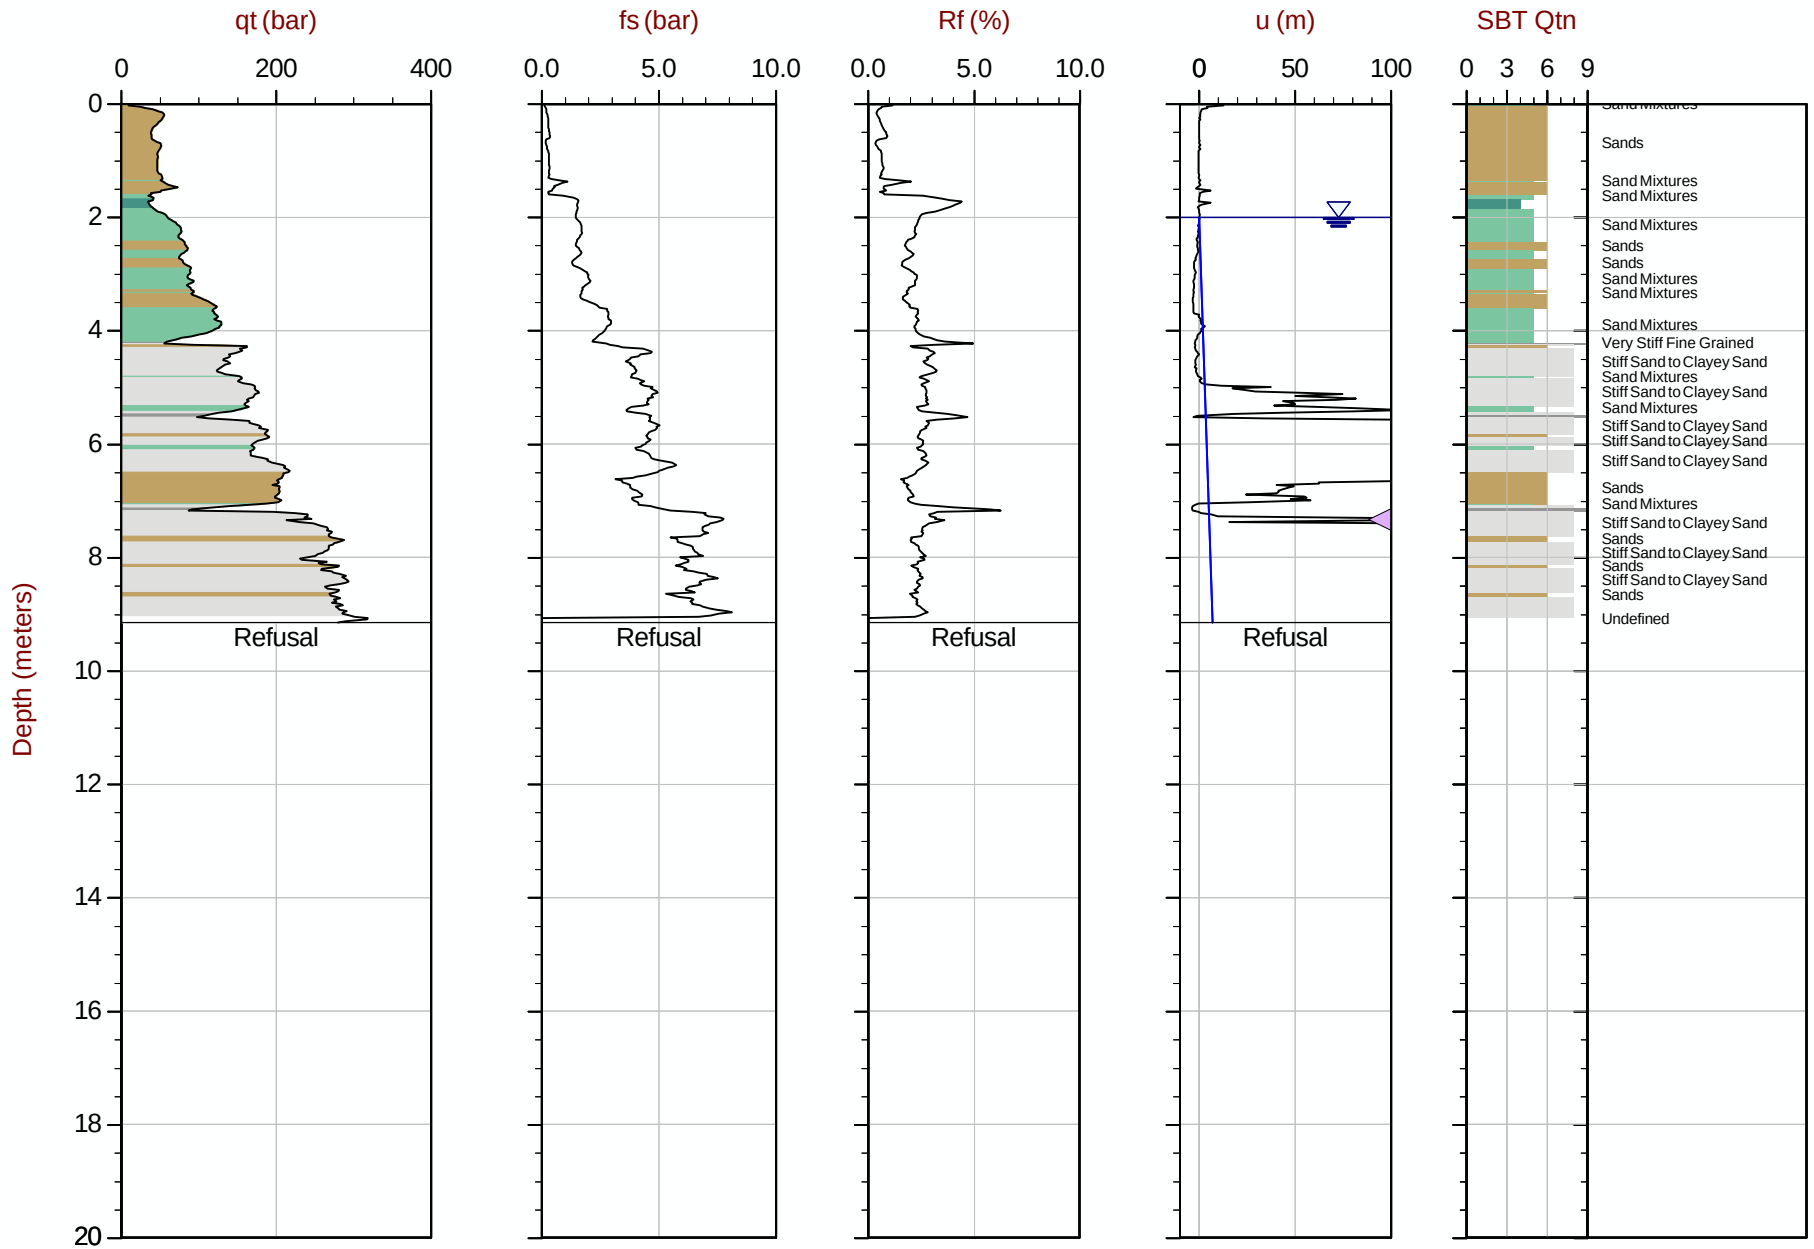

Max Depth: 9.150 m / 30.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT332.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609455m E: 415143m Elev: 777.240m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 08:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT333
Cone: 854:T1500F15U35 Area= 15cm2

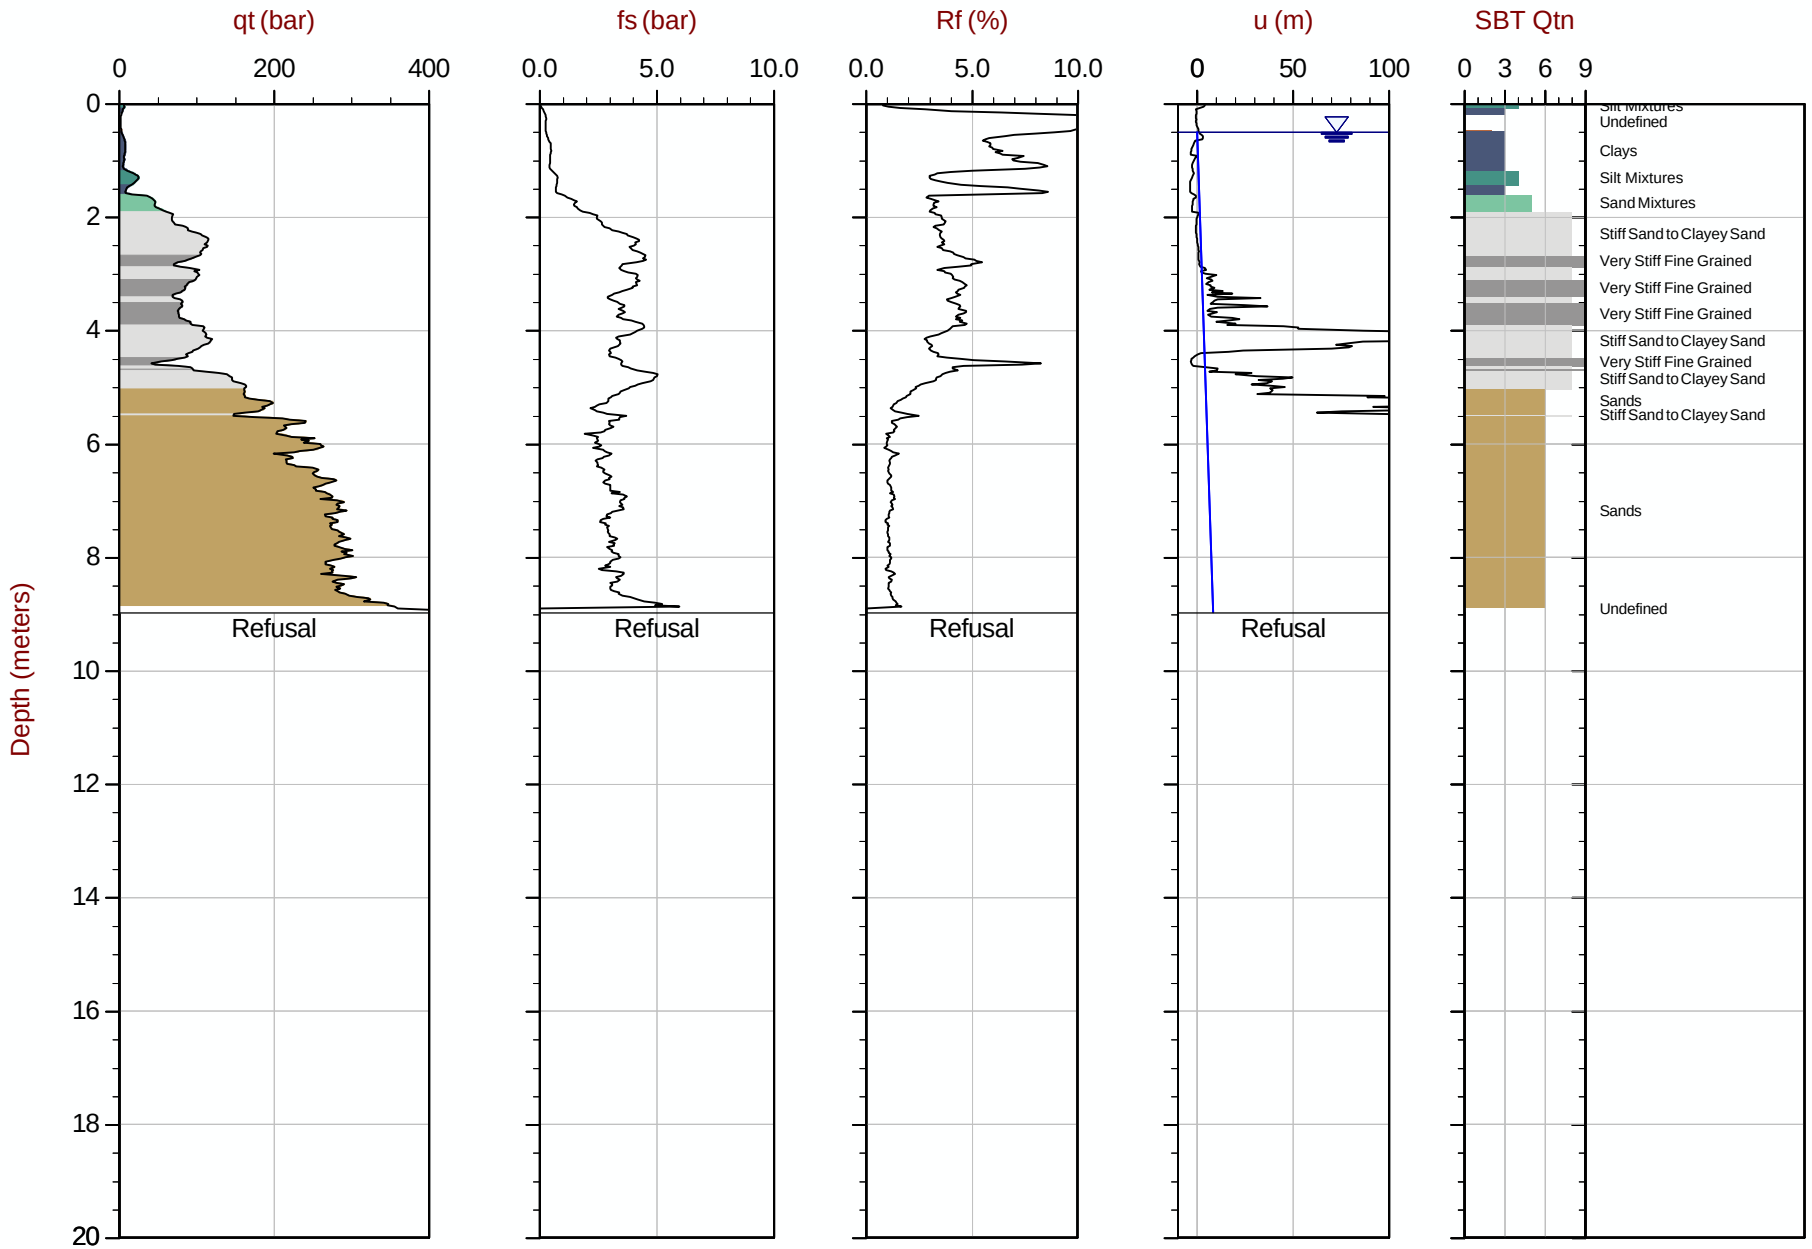

Max Depth: 8.975 m / 29.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT333.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609454m E: 415094m Elev: 775.049m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 10:10
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT334
Cone: 750:T1500F15U35 Area= 15cm2

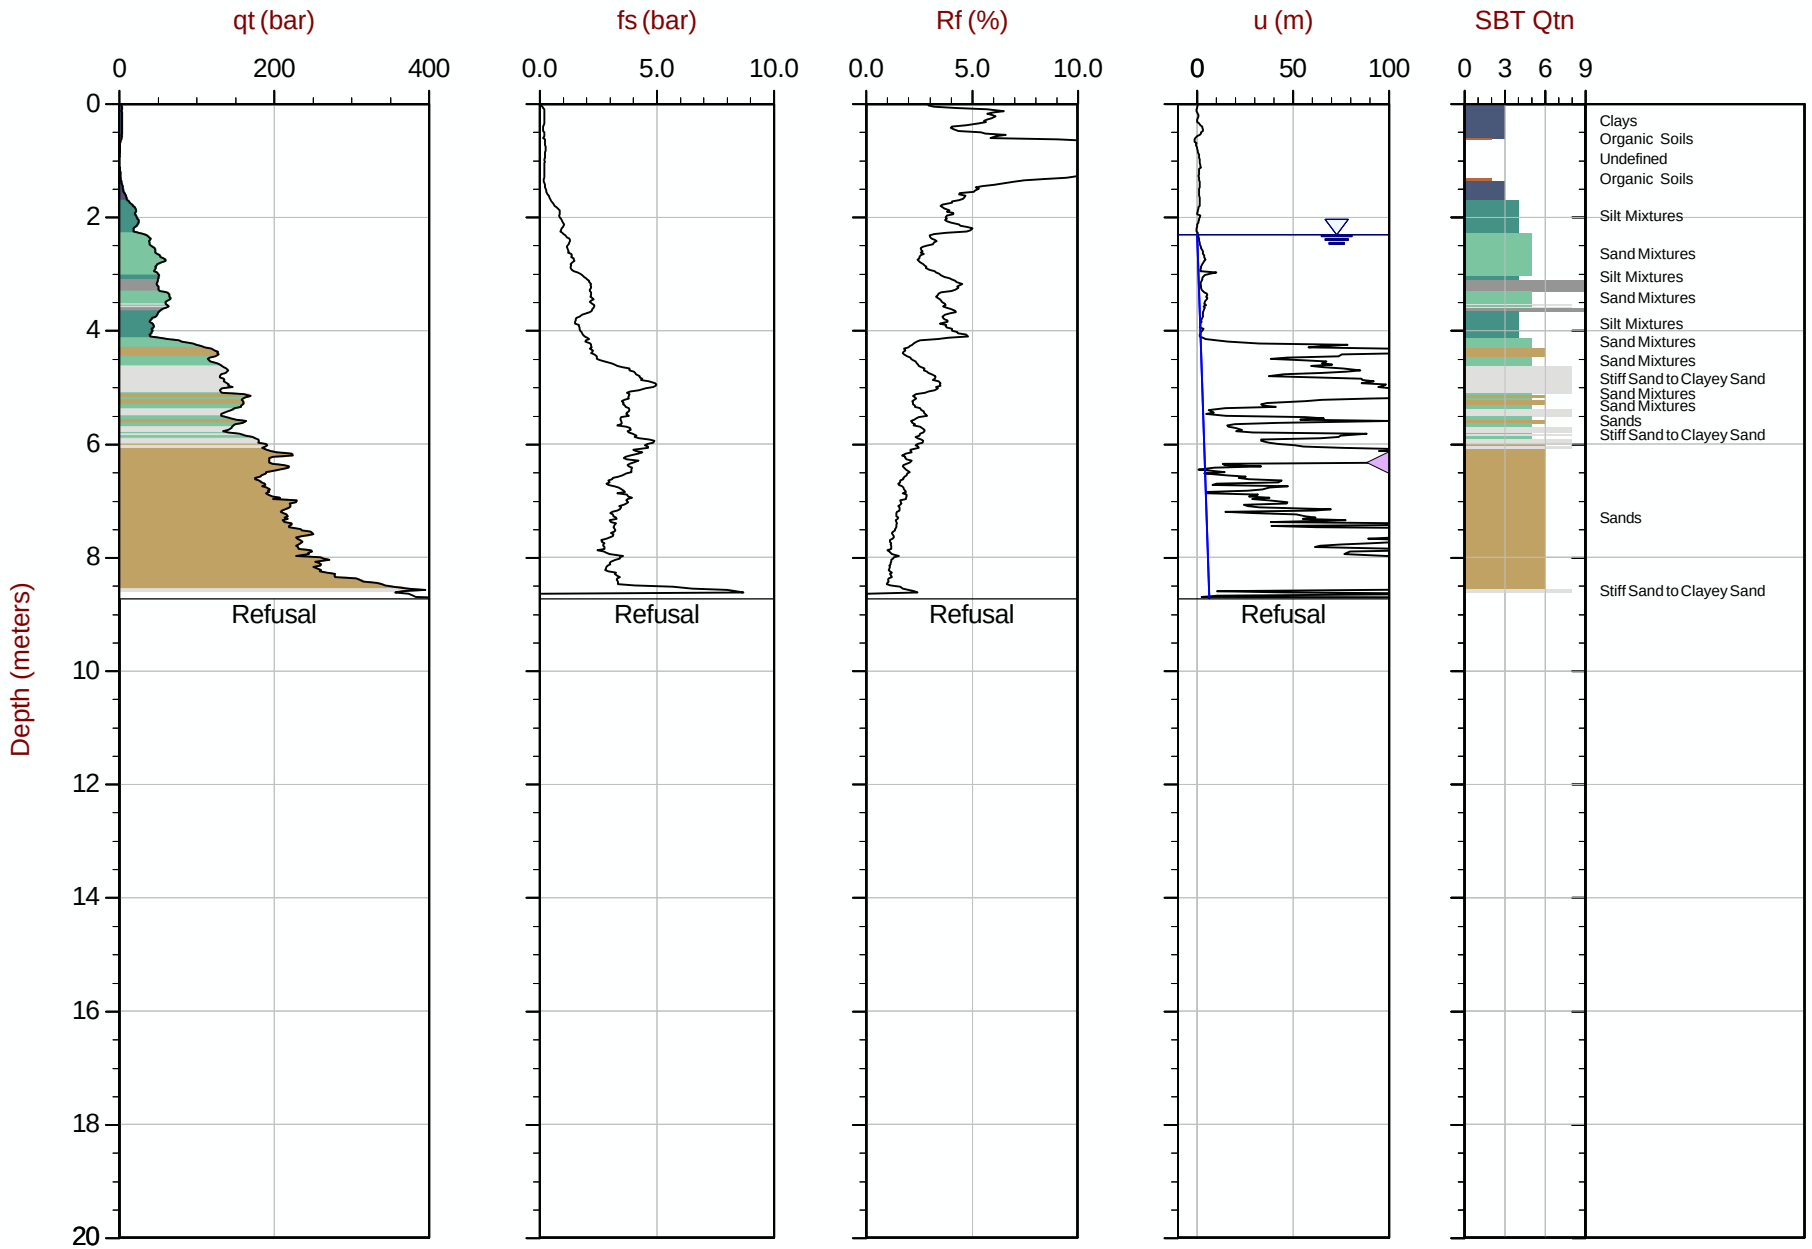

Max Depth: 8.725 m / 28.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT334.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609454m E: 415043m Elev: 774.769m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT335
Cone: 750:T1500F15U35 Area= 15cm2

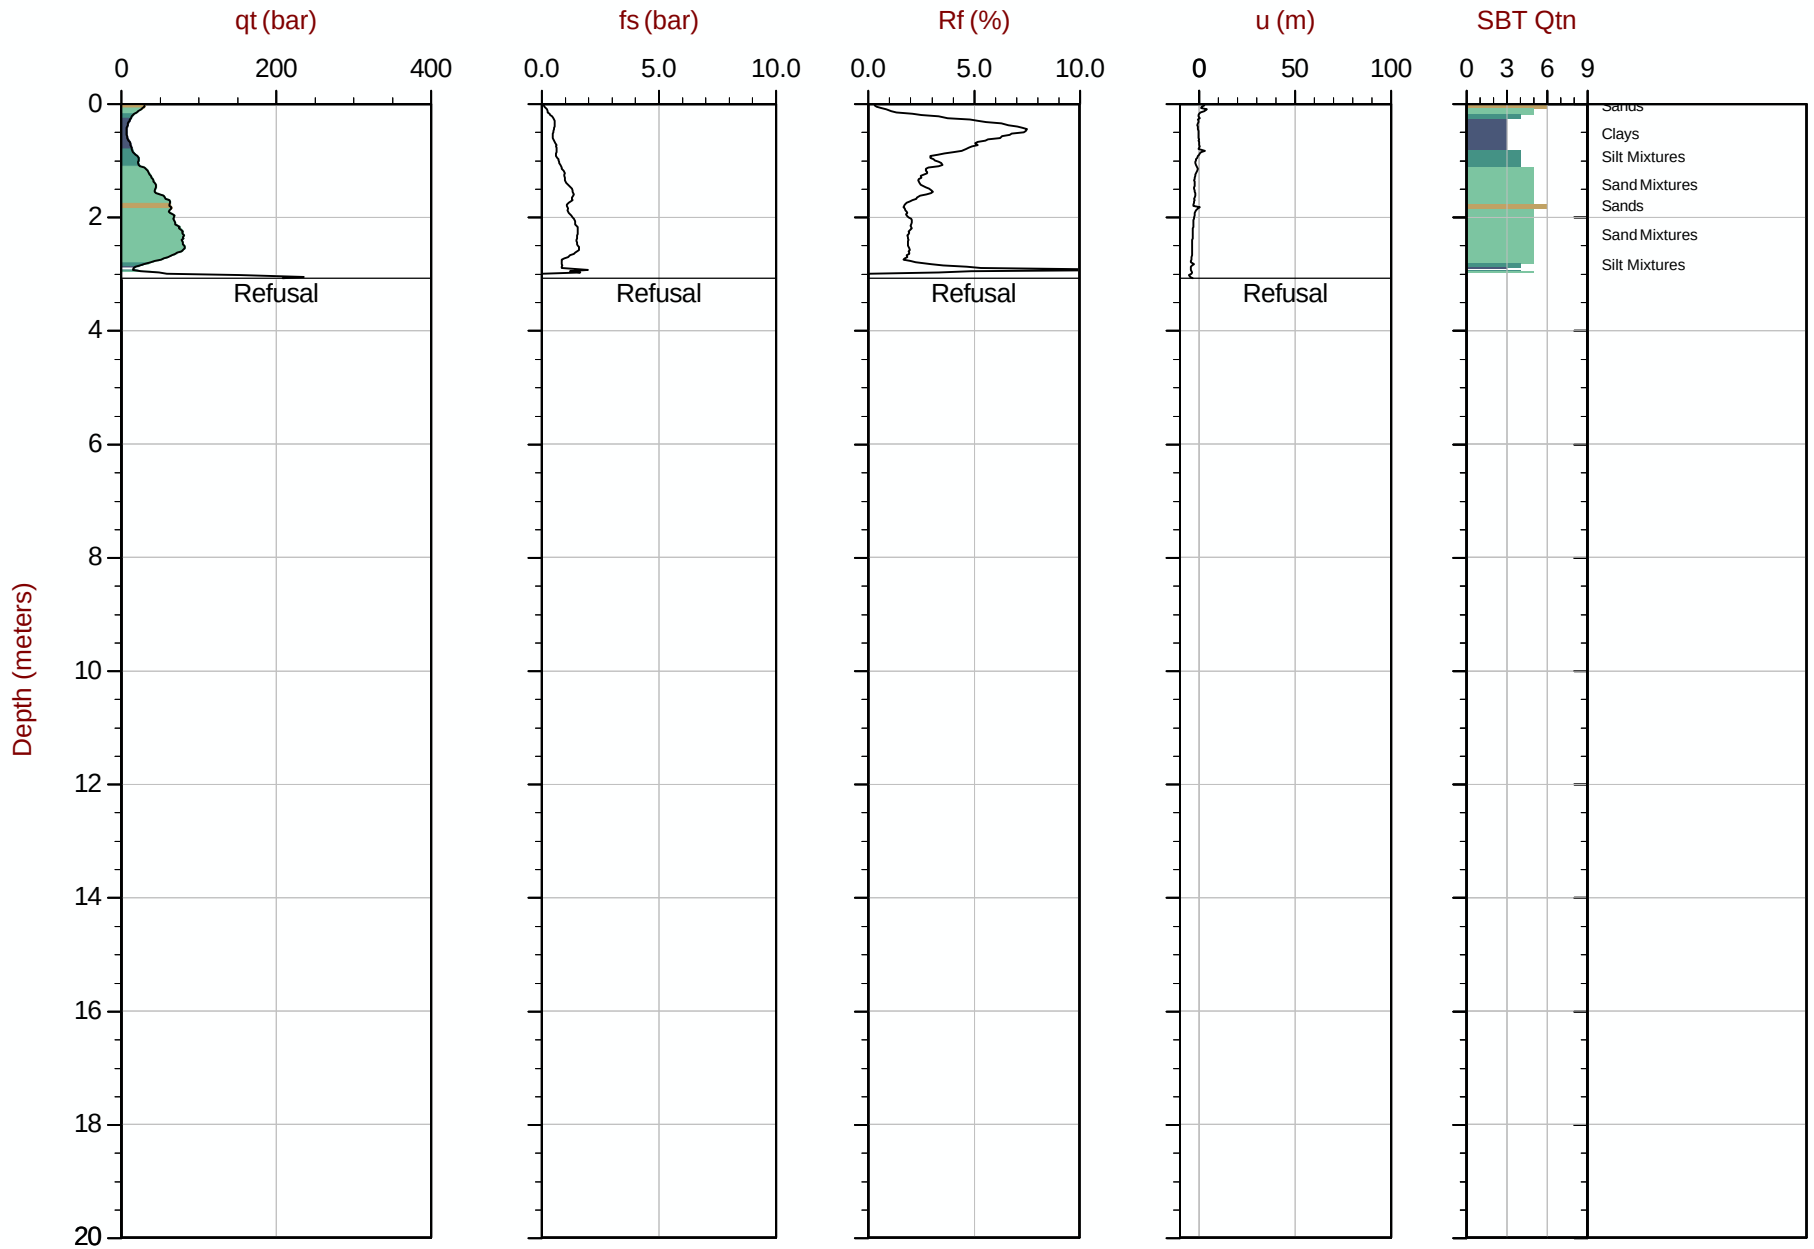

Max Depth: 3.075 m / 10.09 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT335.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 414993m Elev: 776.343m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 13:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT335B
Cone: 821:T1000F10U35 Area= 15cm2

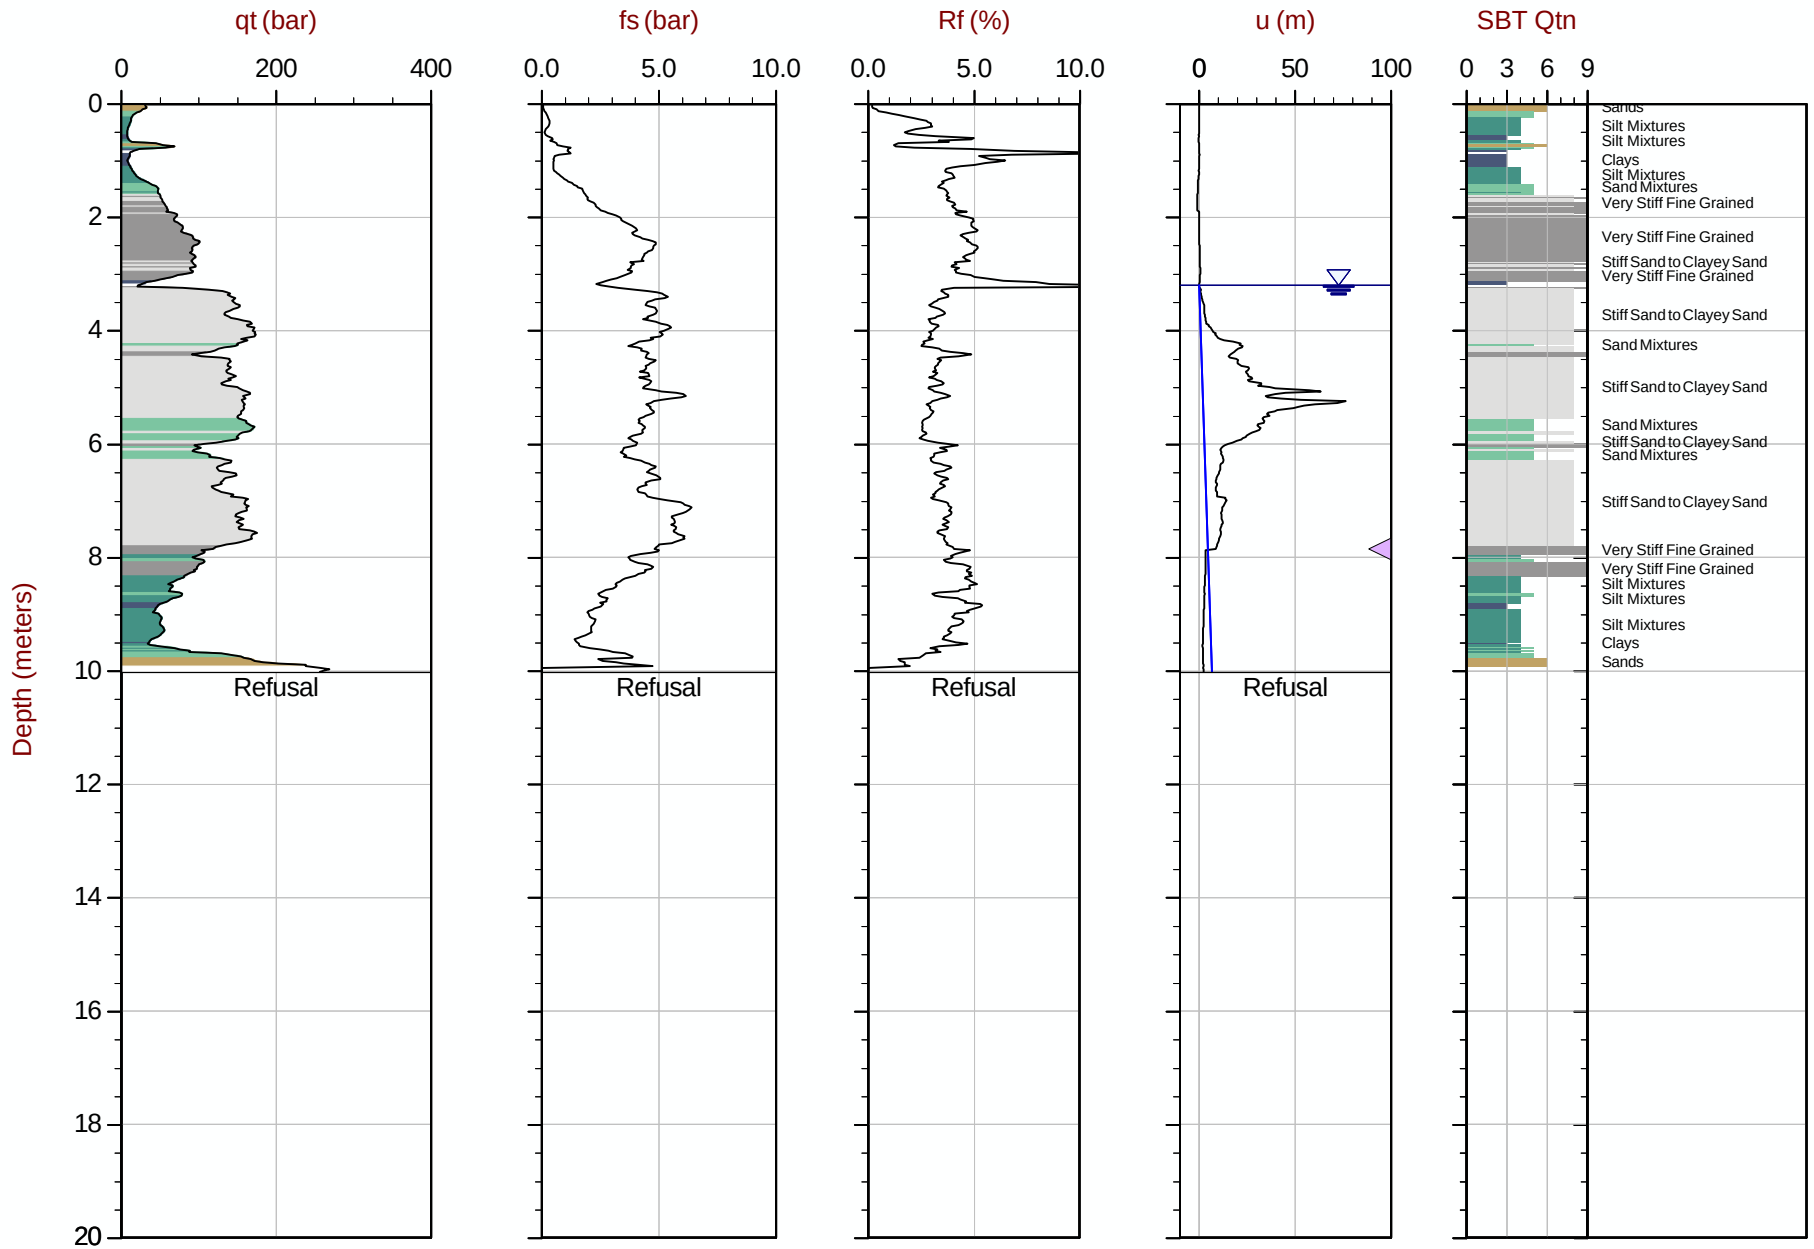

Max Depth: 10.025 m / 32.89 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT335B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 414990m Elev: 776.300m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 14:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT336
Cone: 821:T1000F10U35 Area= 15cm2

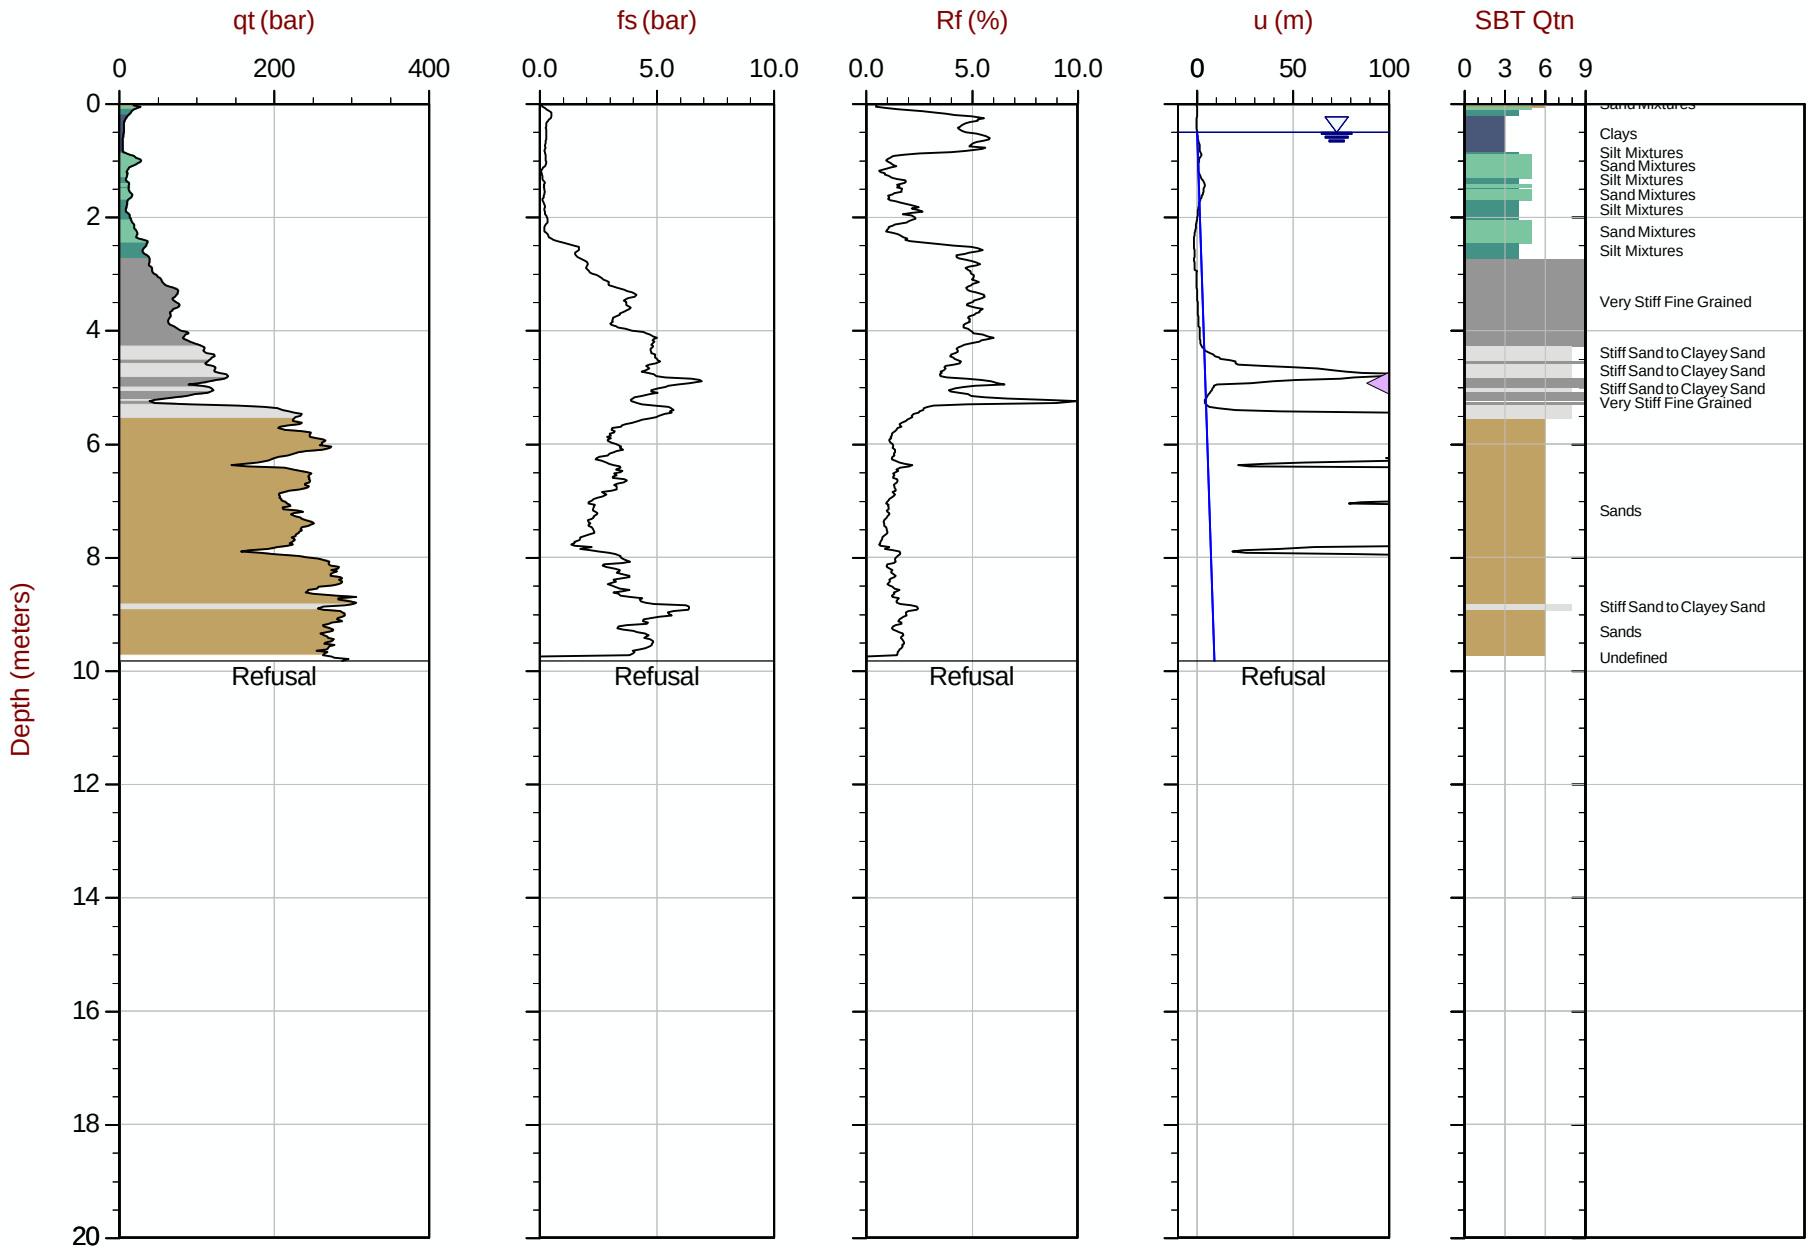

Max Depth: 9.825 m / 32.23 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT336.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609453m E: 414943m Elev: 776.131m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 16:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT337
Cone: 821:T1000F10U35 Area= 15cm2

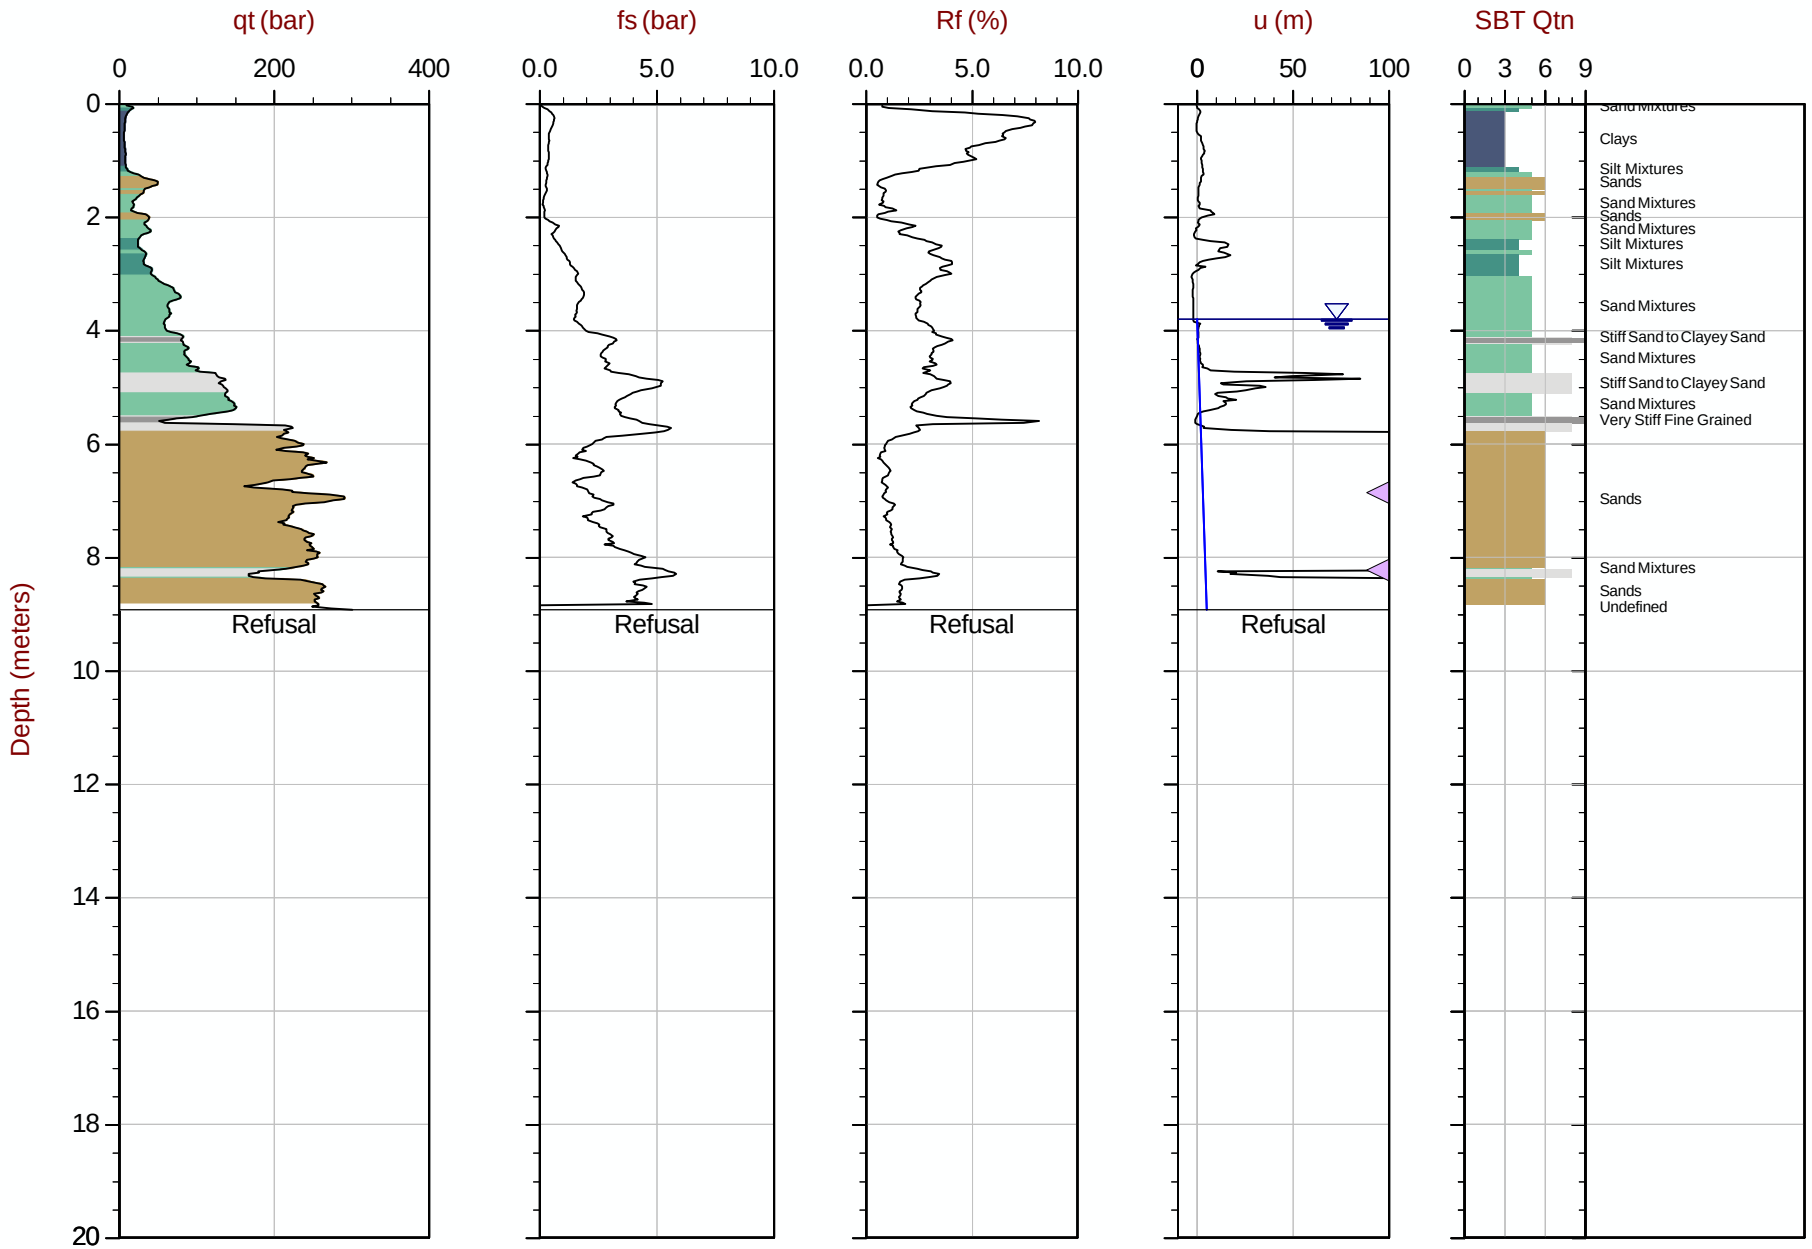

Max Depth: 8.925 m / 29.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT337.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609452m E: 414893m Elev: 776.165m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 07:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT338
Cone: 821:T1000F10U35 Area= 15cm2

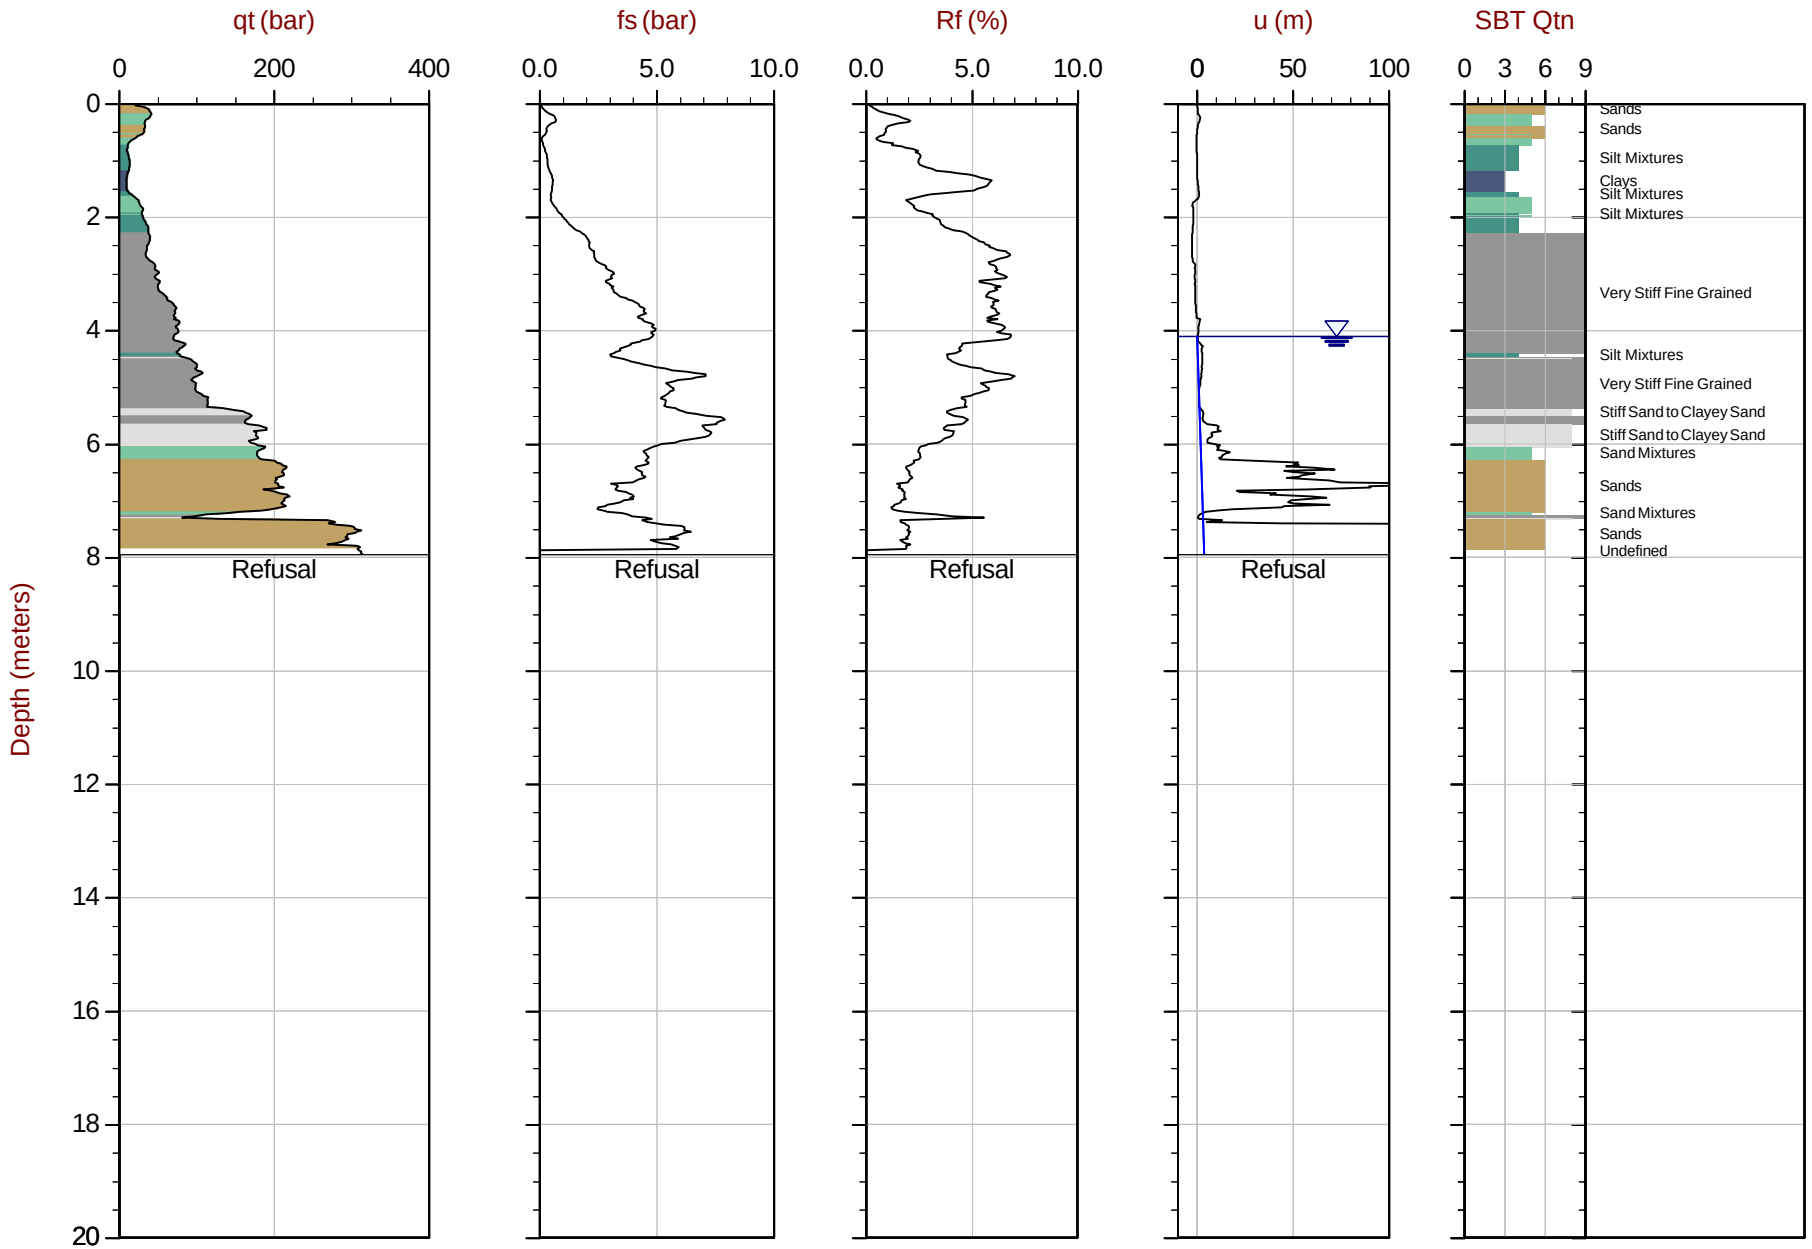

Max Depth: 7.950 m / 26.08 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT338.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609452m E: 414843m Elev: 777.325m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 08:45
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT339
Cone: 821:T1000F10U35 Area= 15cm2

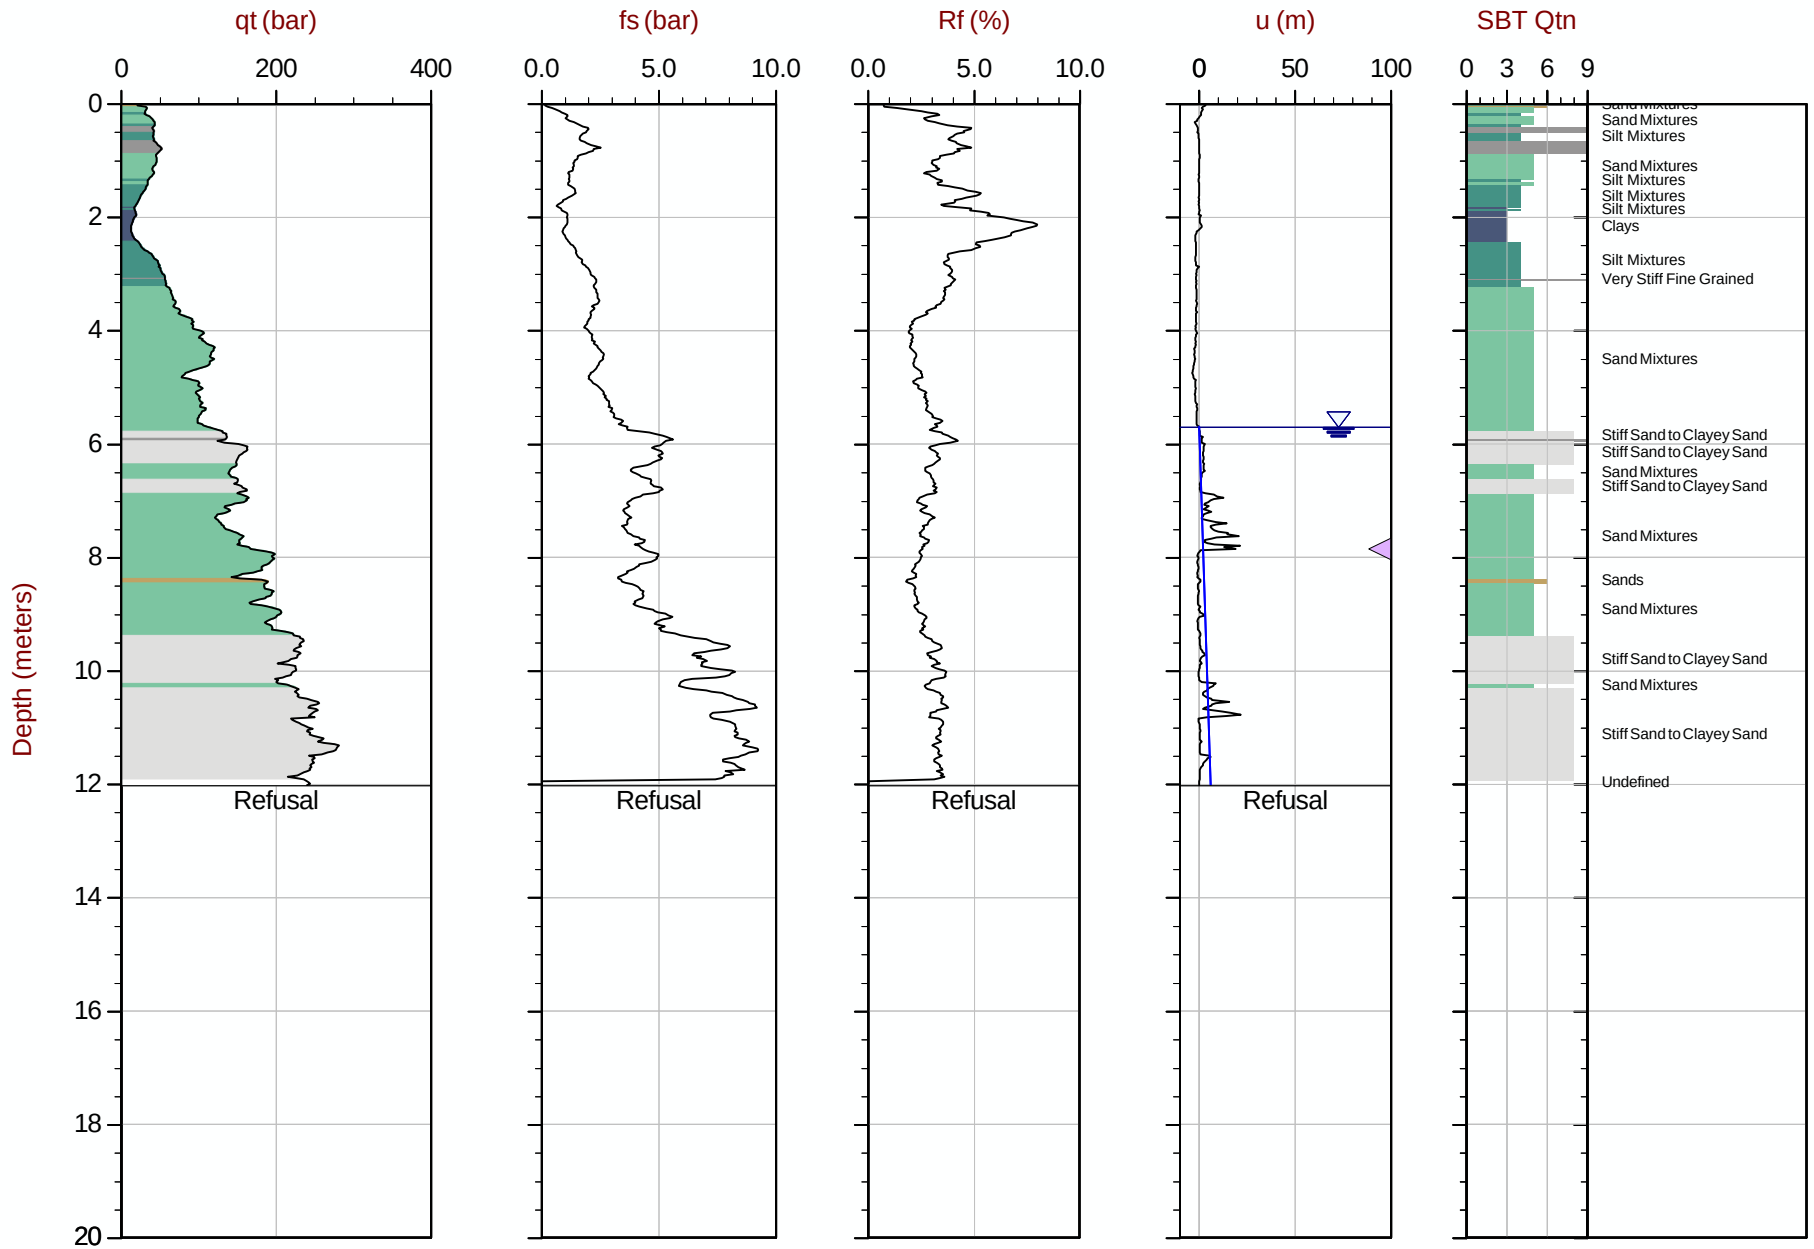

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT339.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609451m E: 414743m Elev: 782.132m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 06:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT340
Cone: 854:T1500F15U35 Area= 15cm2

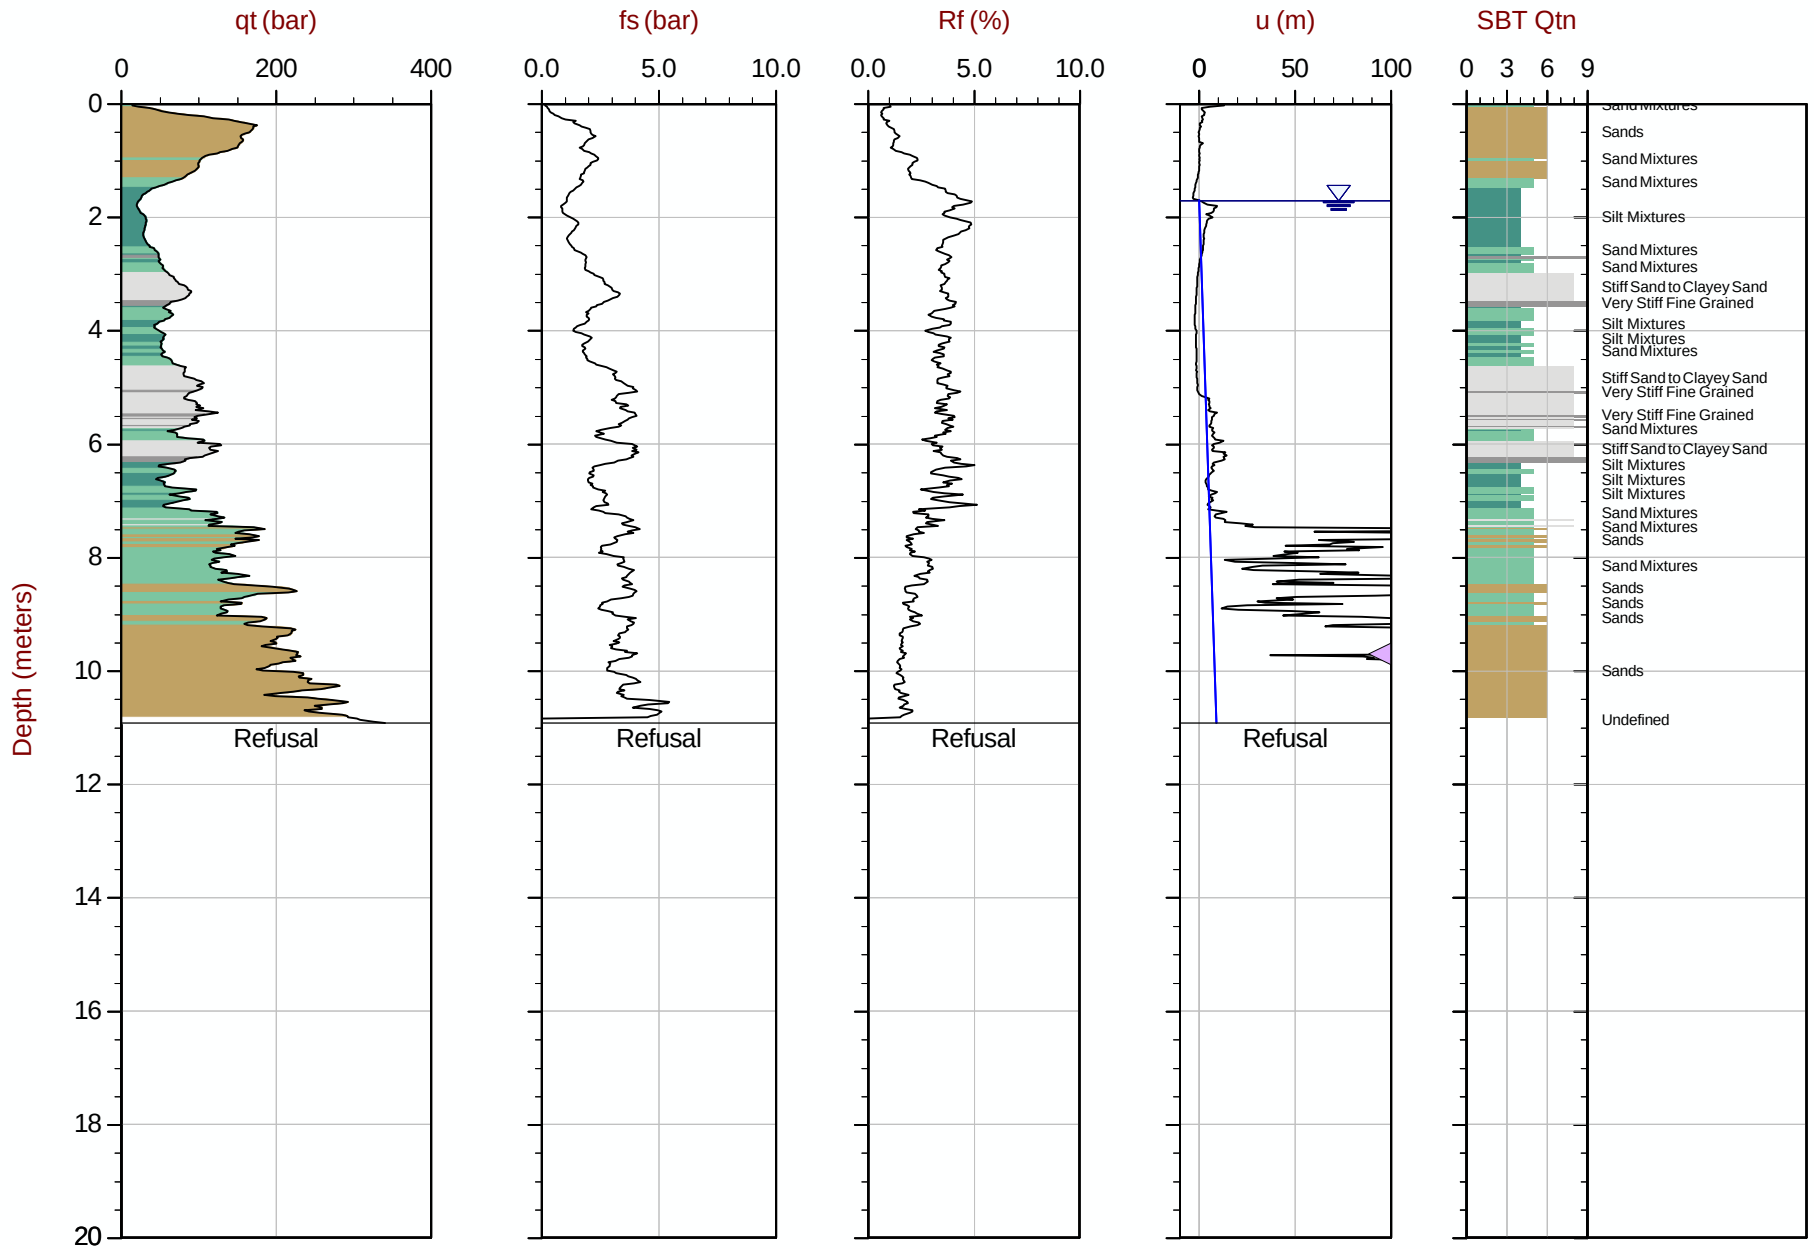

Max Depth: 10.925 m / 35.84 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT340.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609553m E: 416816m Elev: 767.994m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 09:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT341
Cone: 854:T1500F15U35 Area= 15cm2

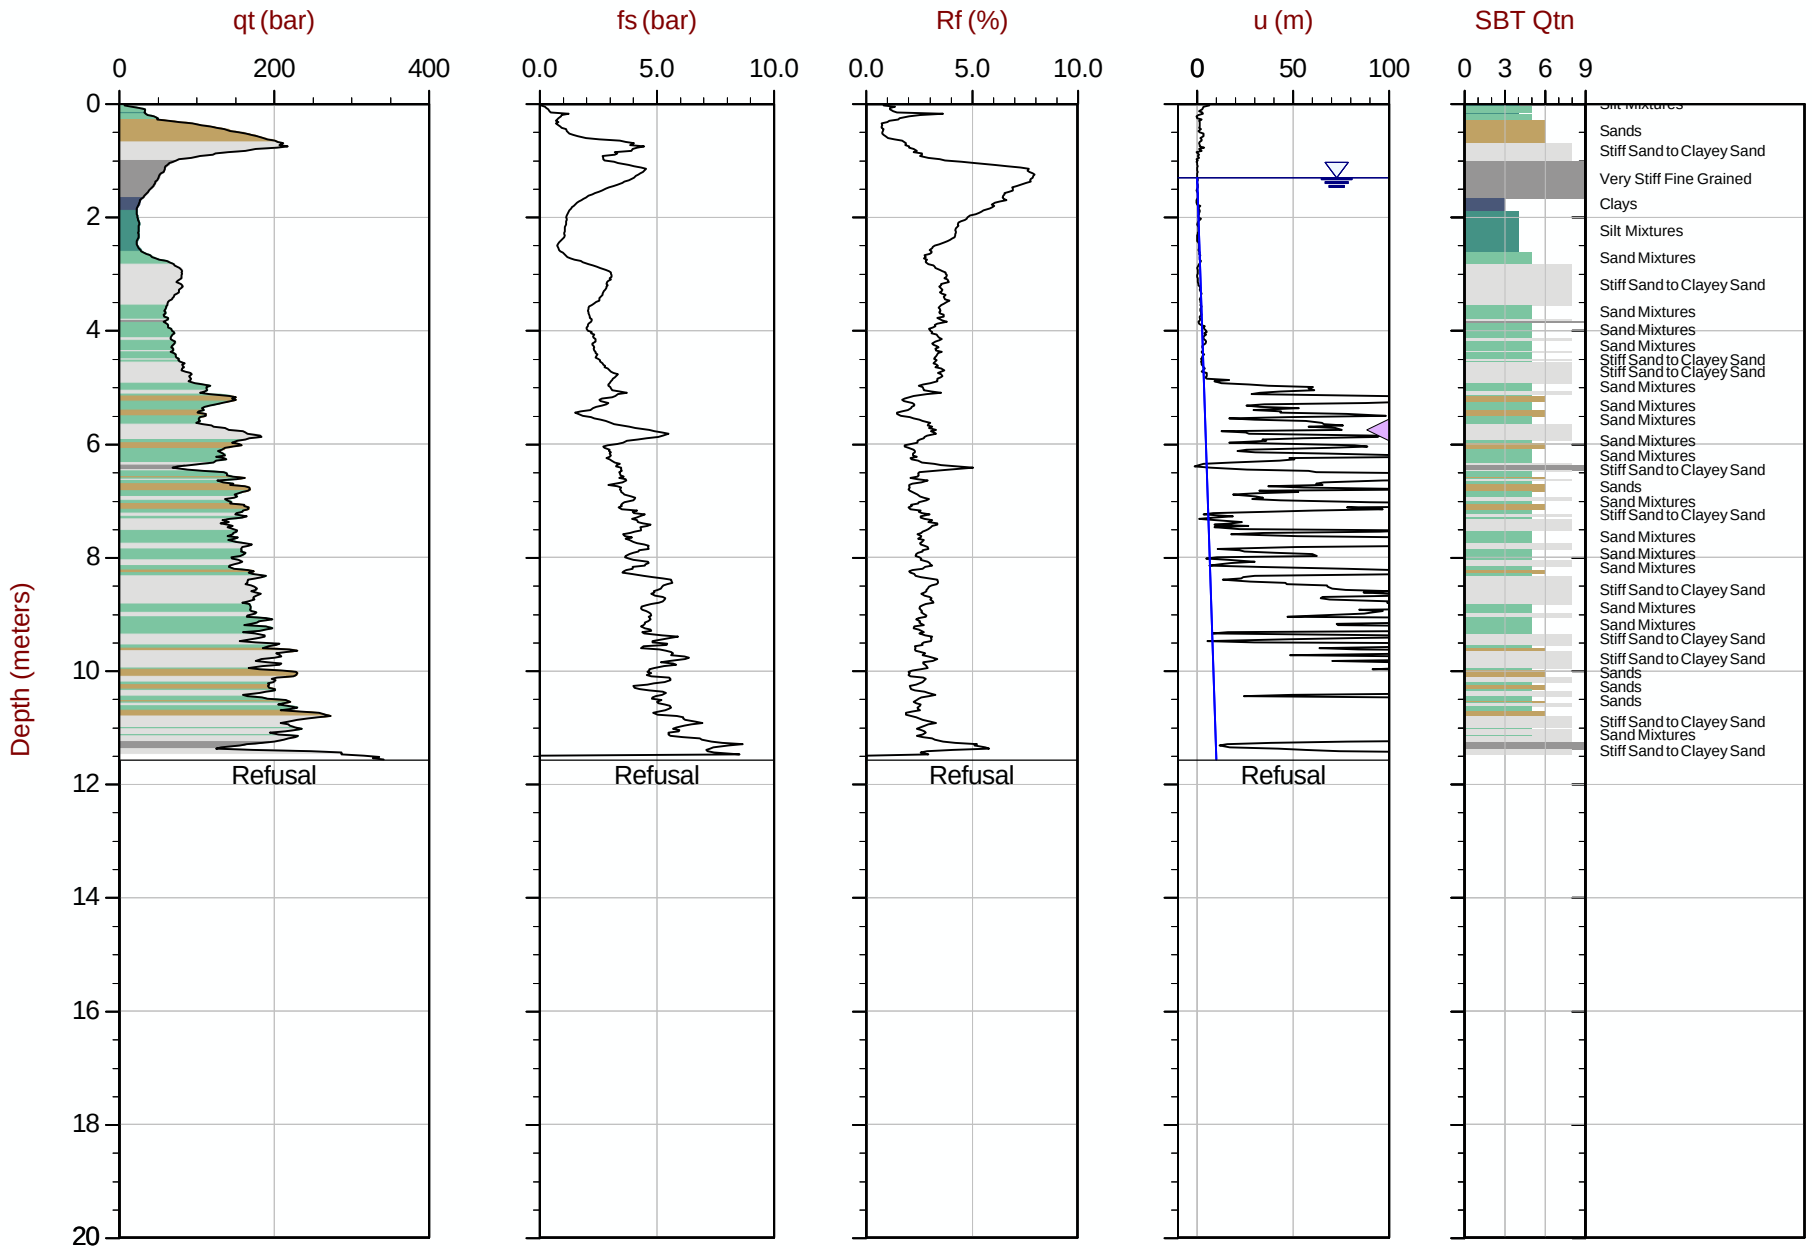

Max Depth: 11.575 m / 37.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT341.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609478m E: 416727m Elev: 768.082m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 15:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT343
Cone: 854:T1500F15U35 Area= 15cm2

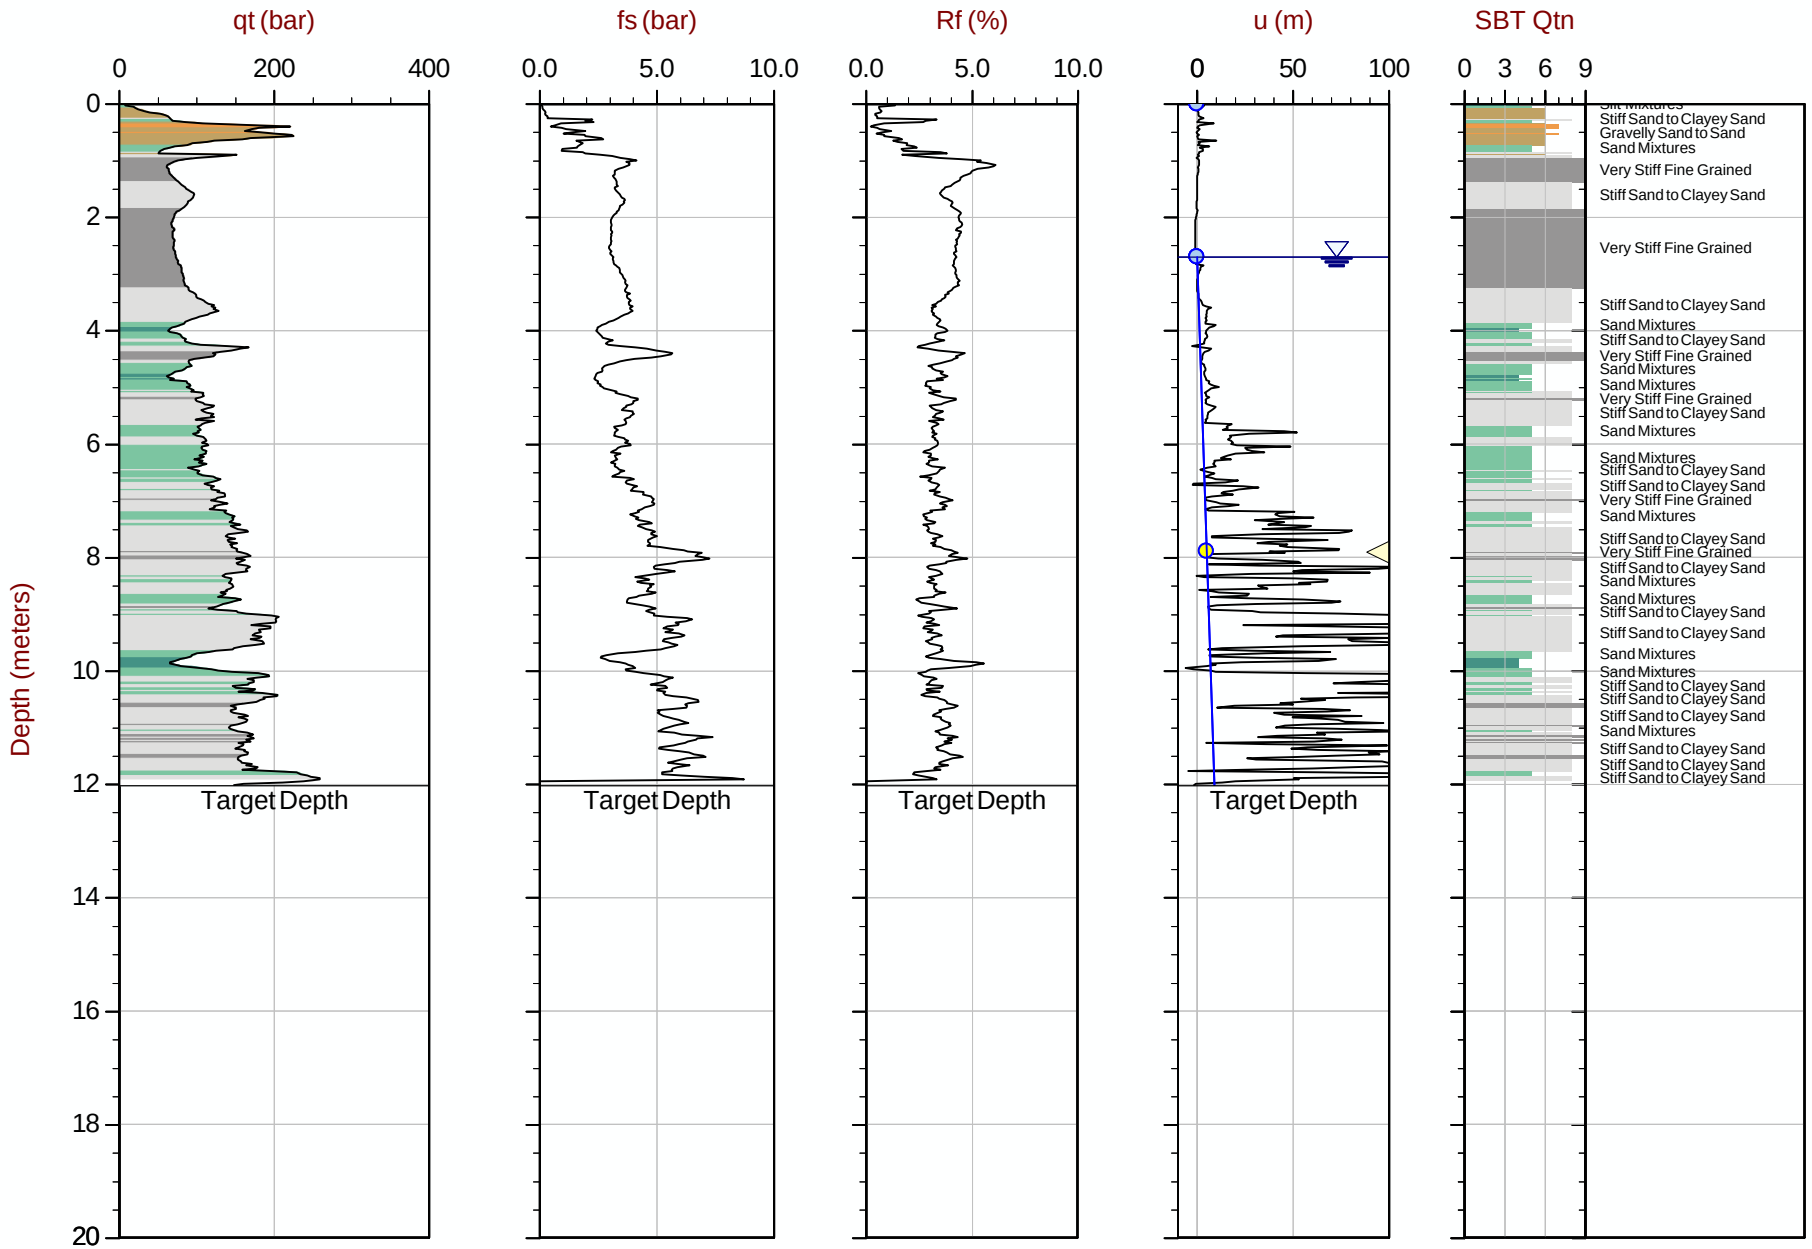

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT343.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609430m E: 416510m Elev: 770.018m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 08:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT344
Cone: 854:T1500F15U35 Area= 15cm2

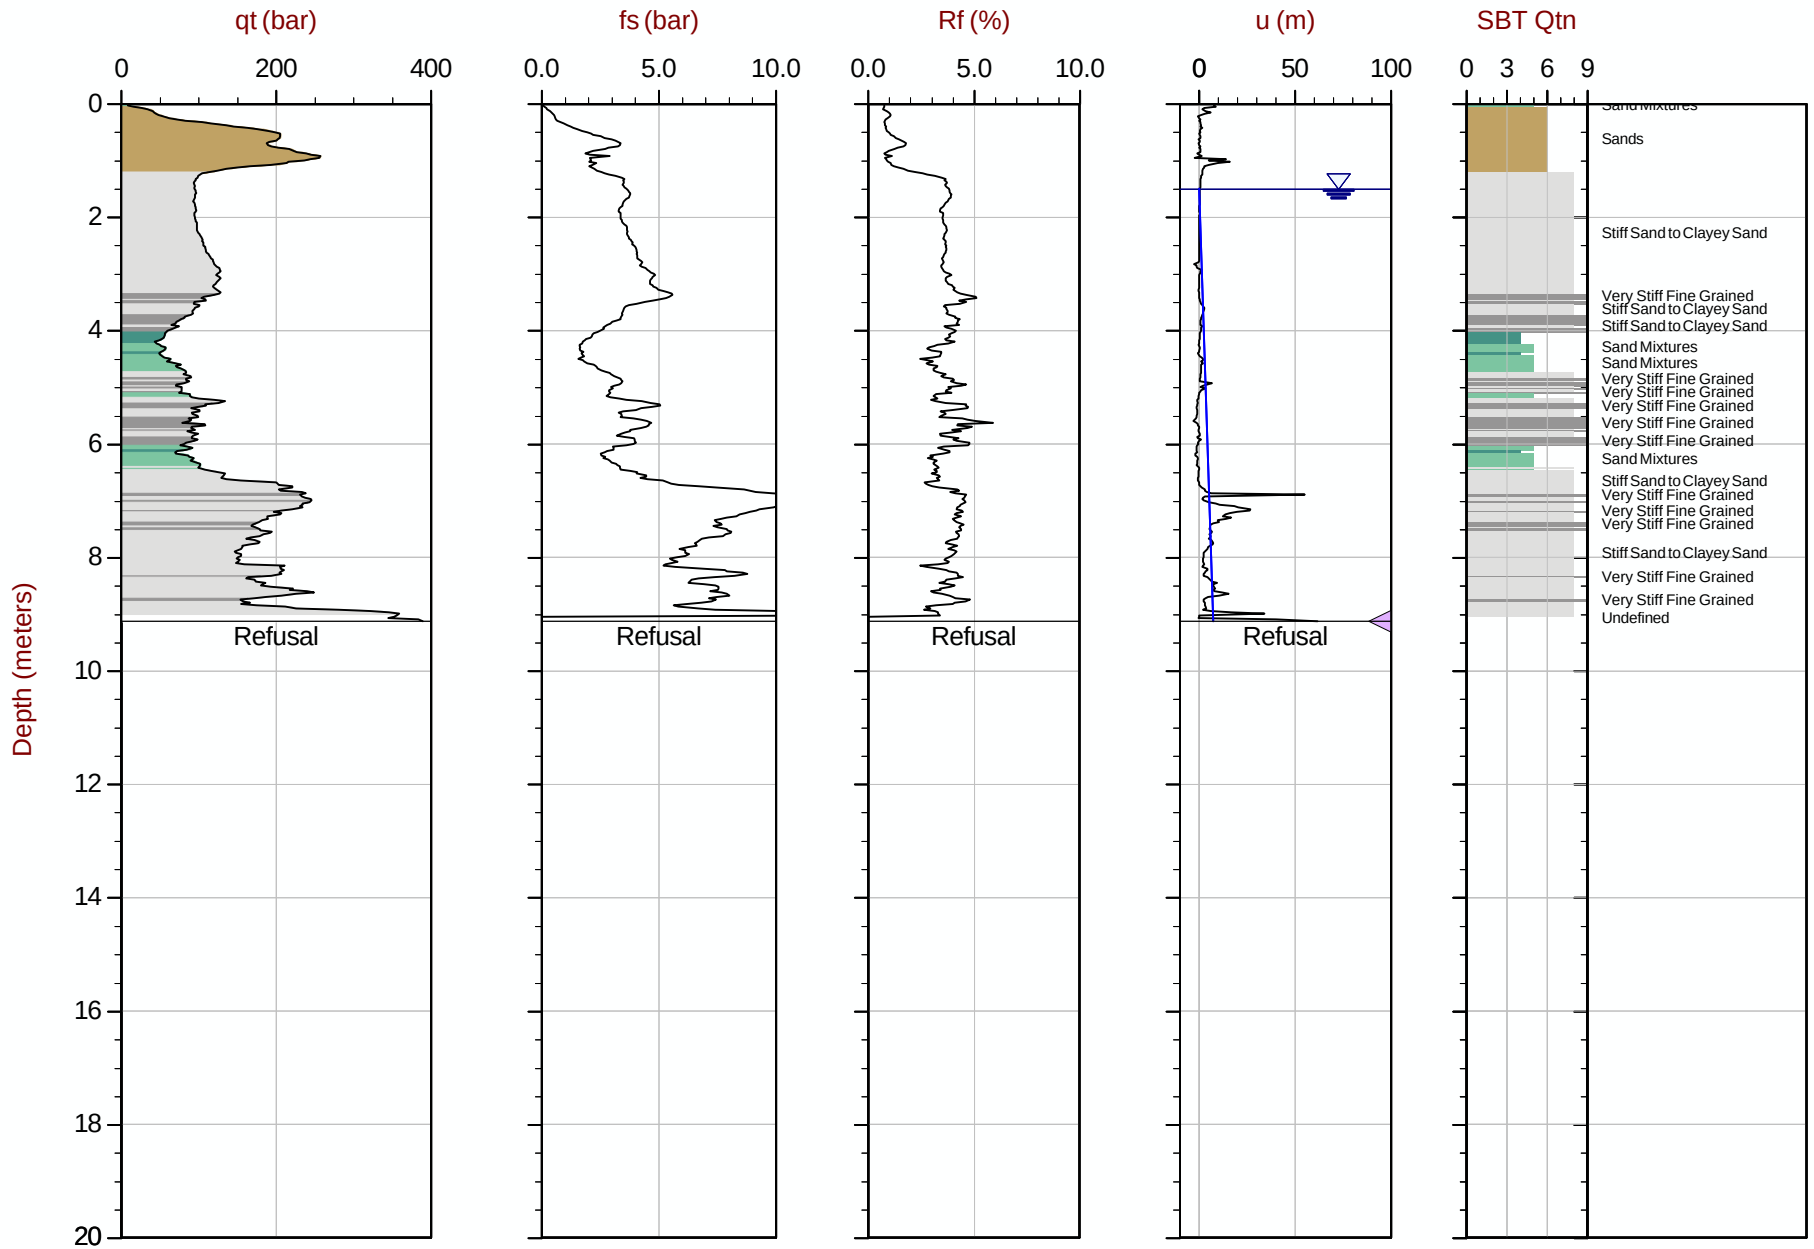

Max Depth: 9.125 m / 29.94 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT344.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609431m E: 416410m Elev: 770.338m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 11:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT345
Cone: 854:T1500F15U35 Area= 15cm2

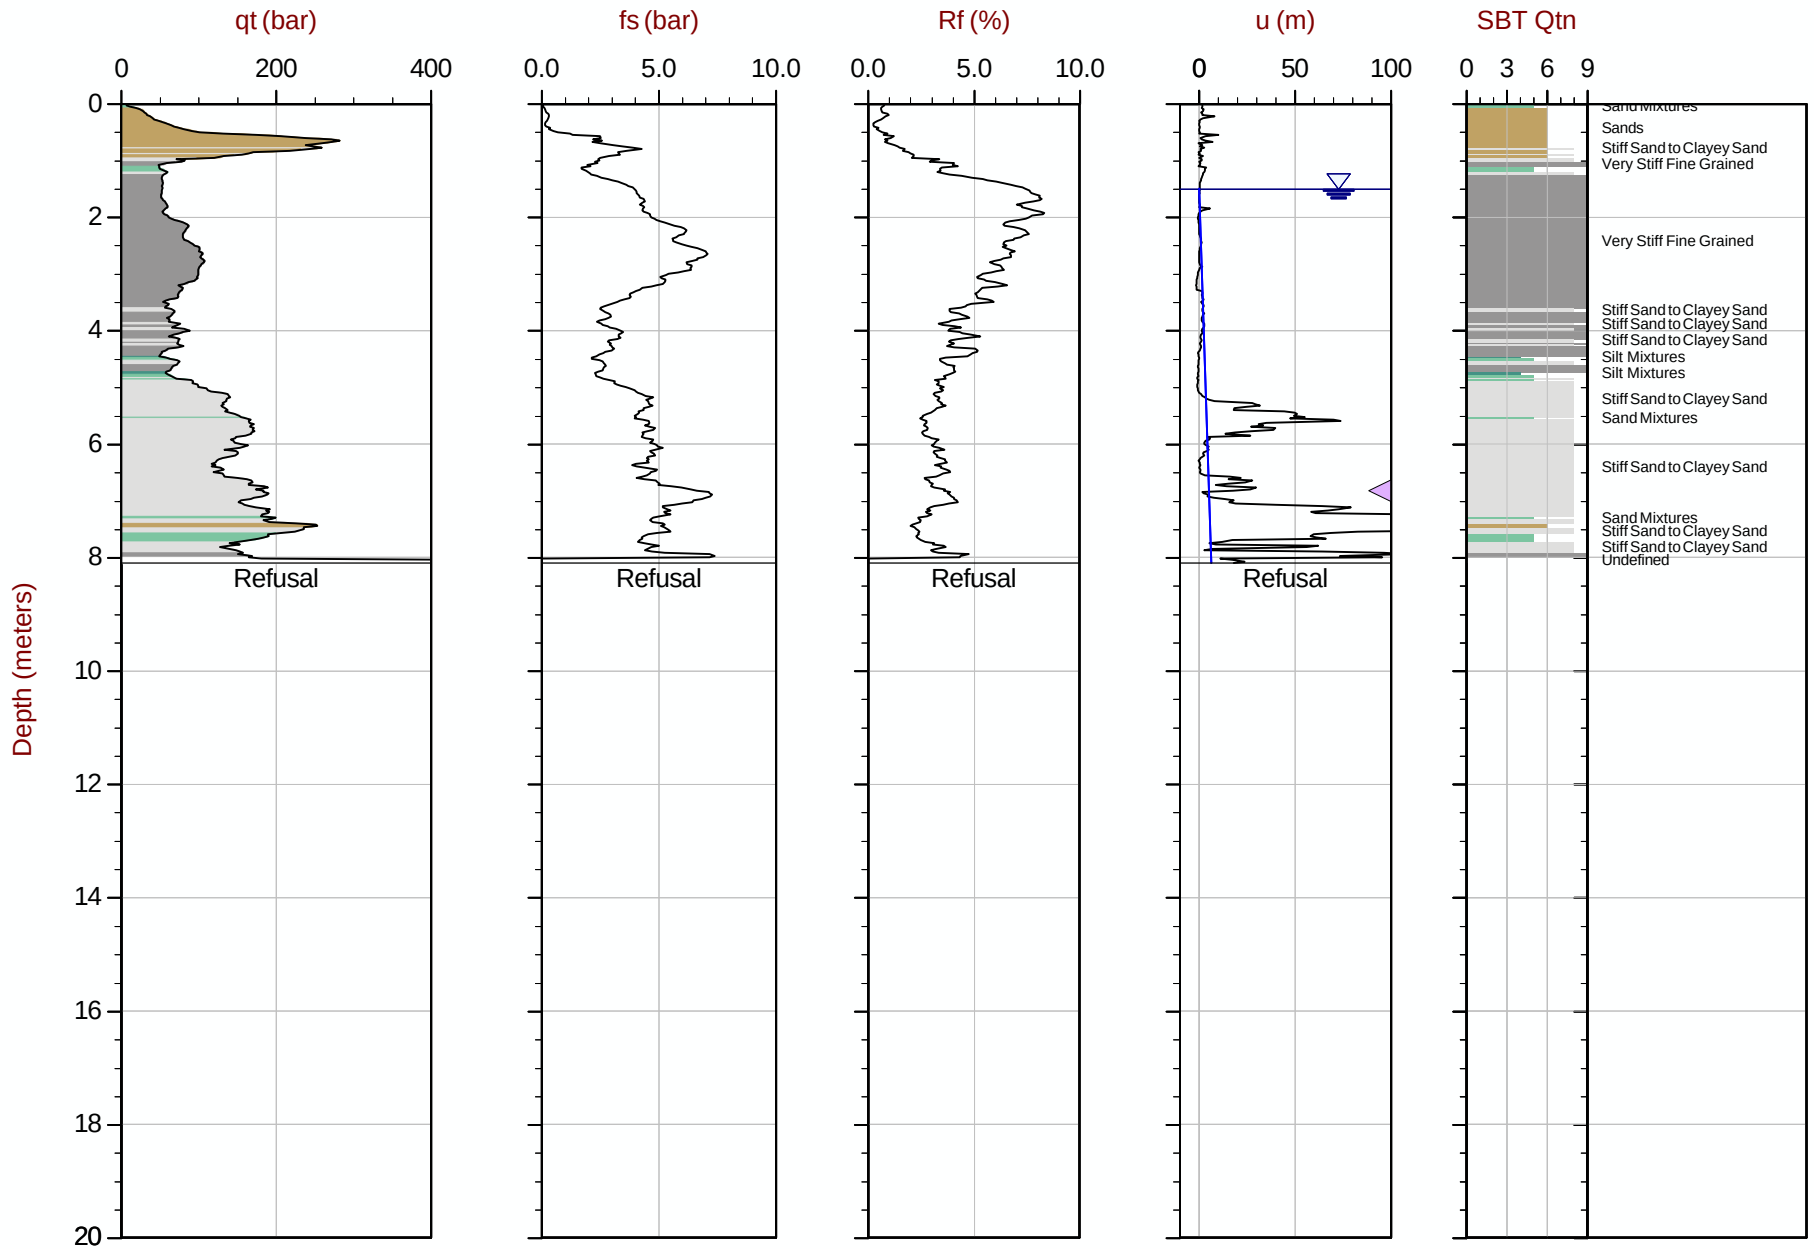

Max Depth: 8.100 m / 26.57 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT345.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609433m E: 416311m Elev: 770.990m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 14:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT346
Cone: 854:T1500F15U35 Area= 15cm2

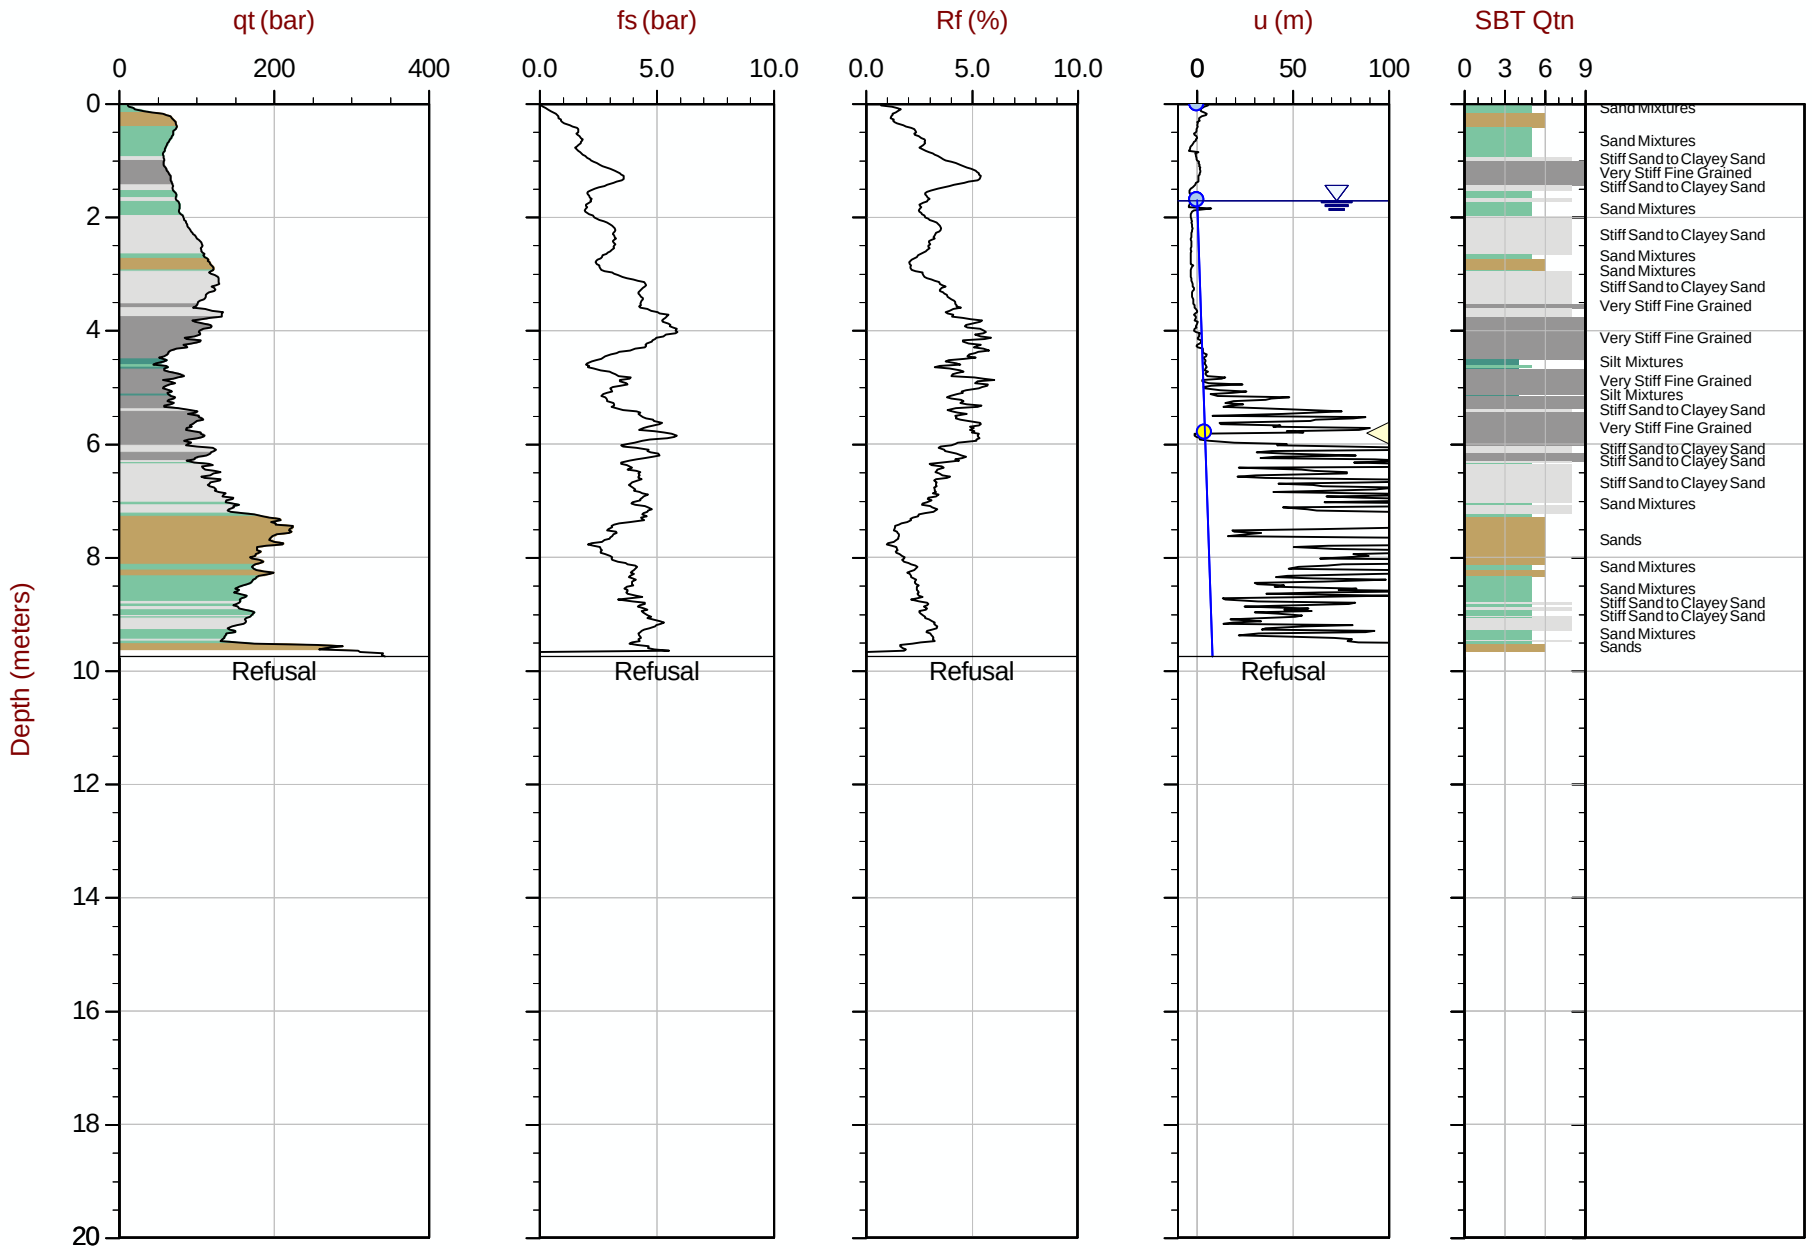

Max Depth: 9.750 m / 31.99 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT346.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609434m E: 416210m Elev: 771.330m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 07:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT347
Cone: 854:T1500F15U35 Area= 15cm2

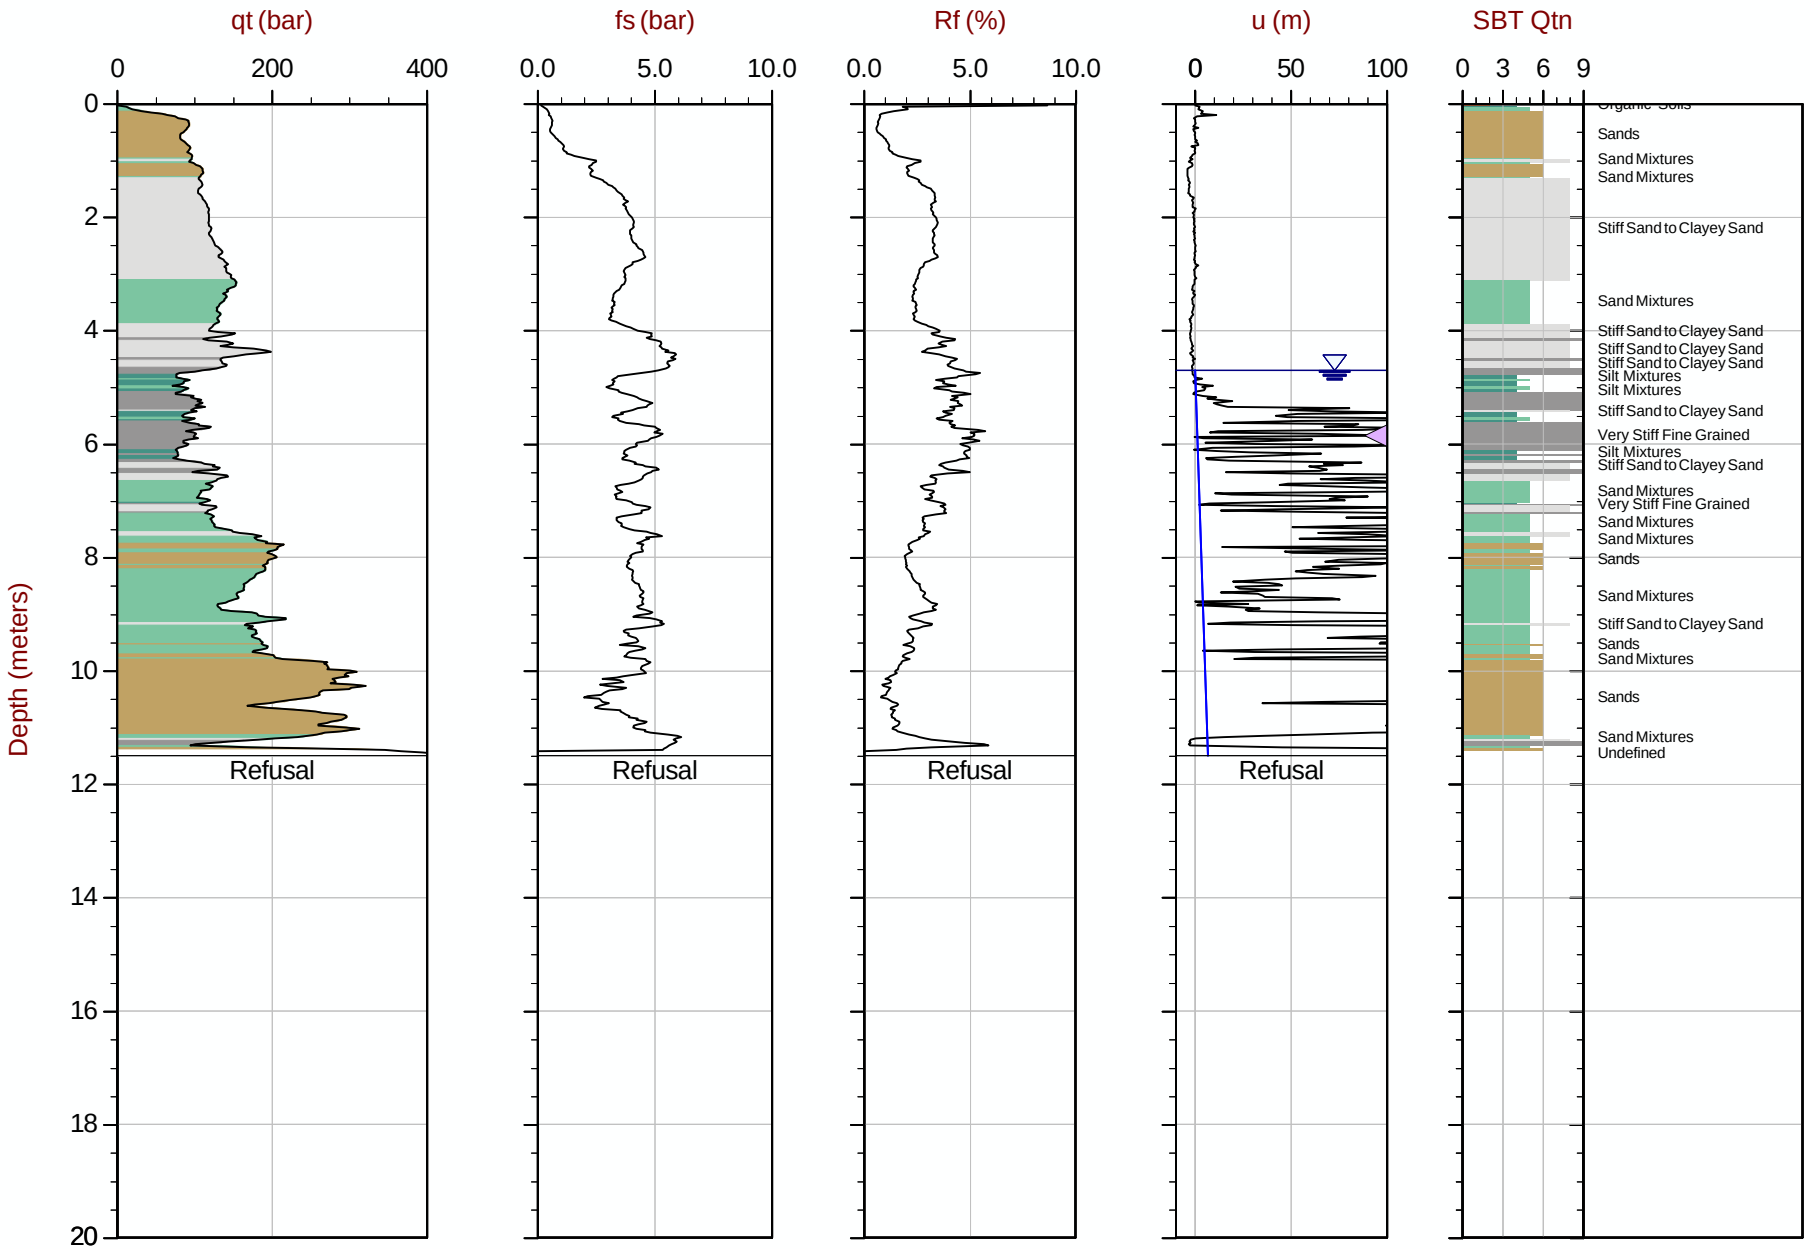

Max Depth: 11.500 m / 37.73 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT347.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 416111m Elev: 771.904m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 11:18
Site: Brooks, Alberta

Sounding: RCPT22-22CPT348
Cone: 854:T1500F15U35 Area= 15cm2

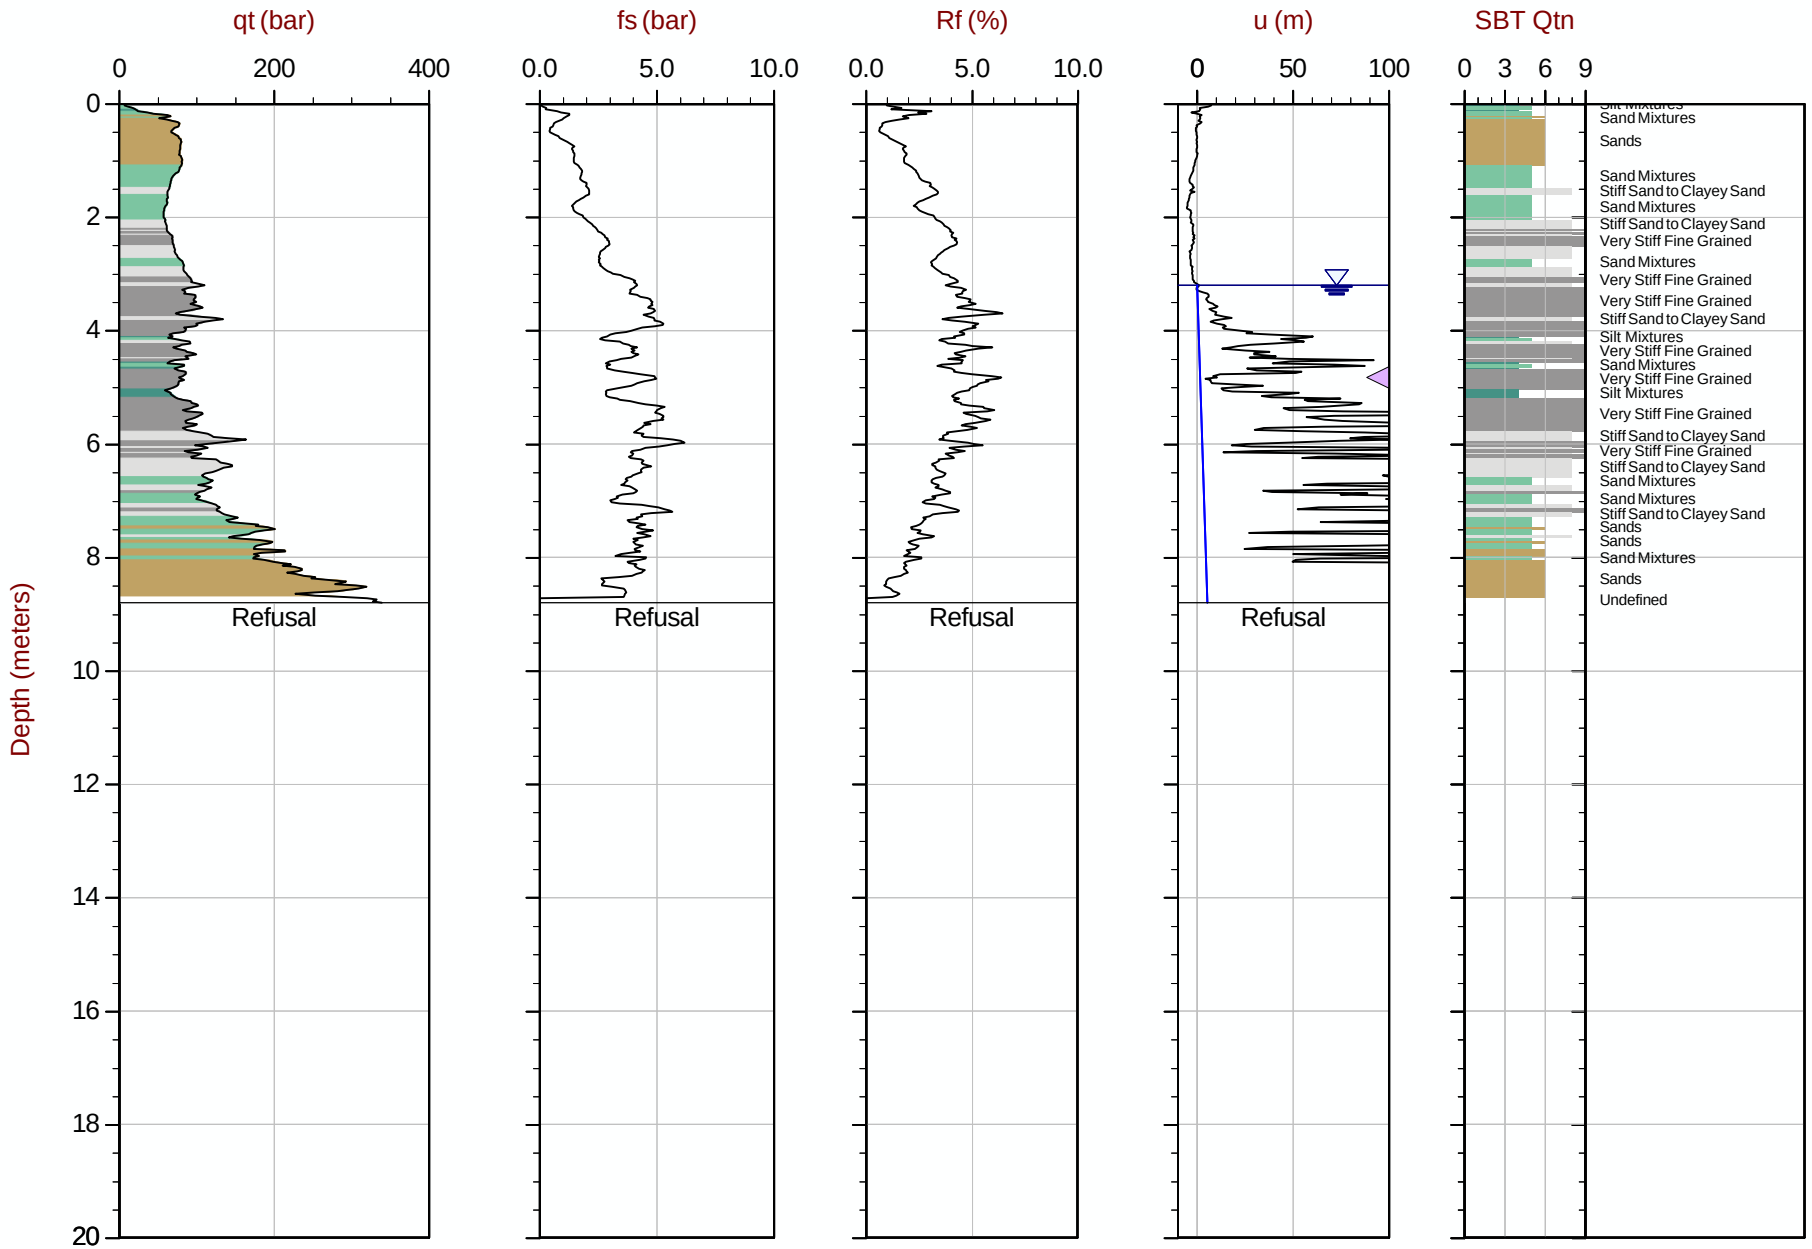

Max Depth: 8.800 m / 28.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT348.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609434m E: 416011m Elev: 771.568m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 16:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT350
Cone: 854:T1500F15U35 Area= 15cm2

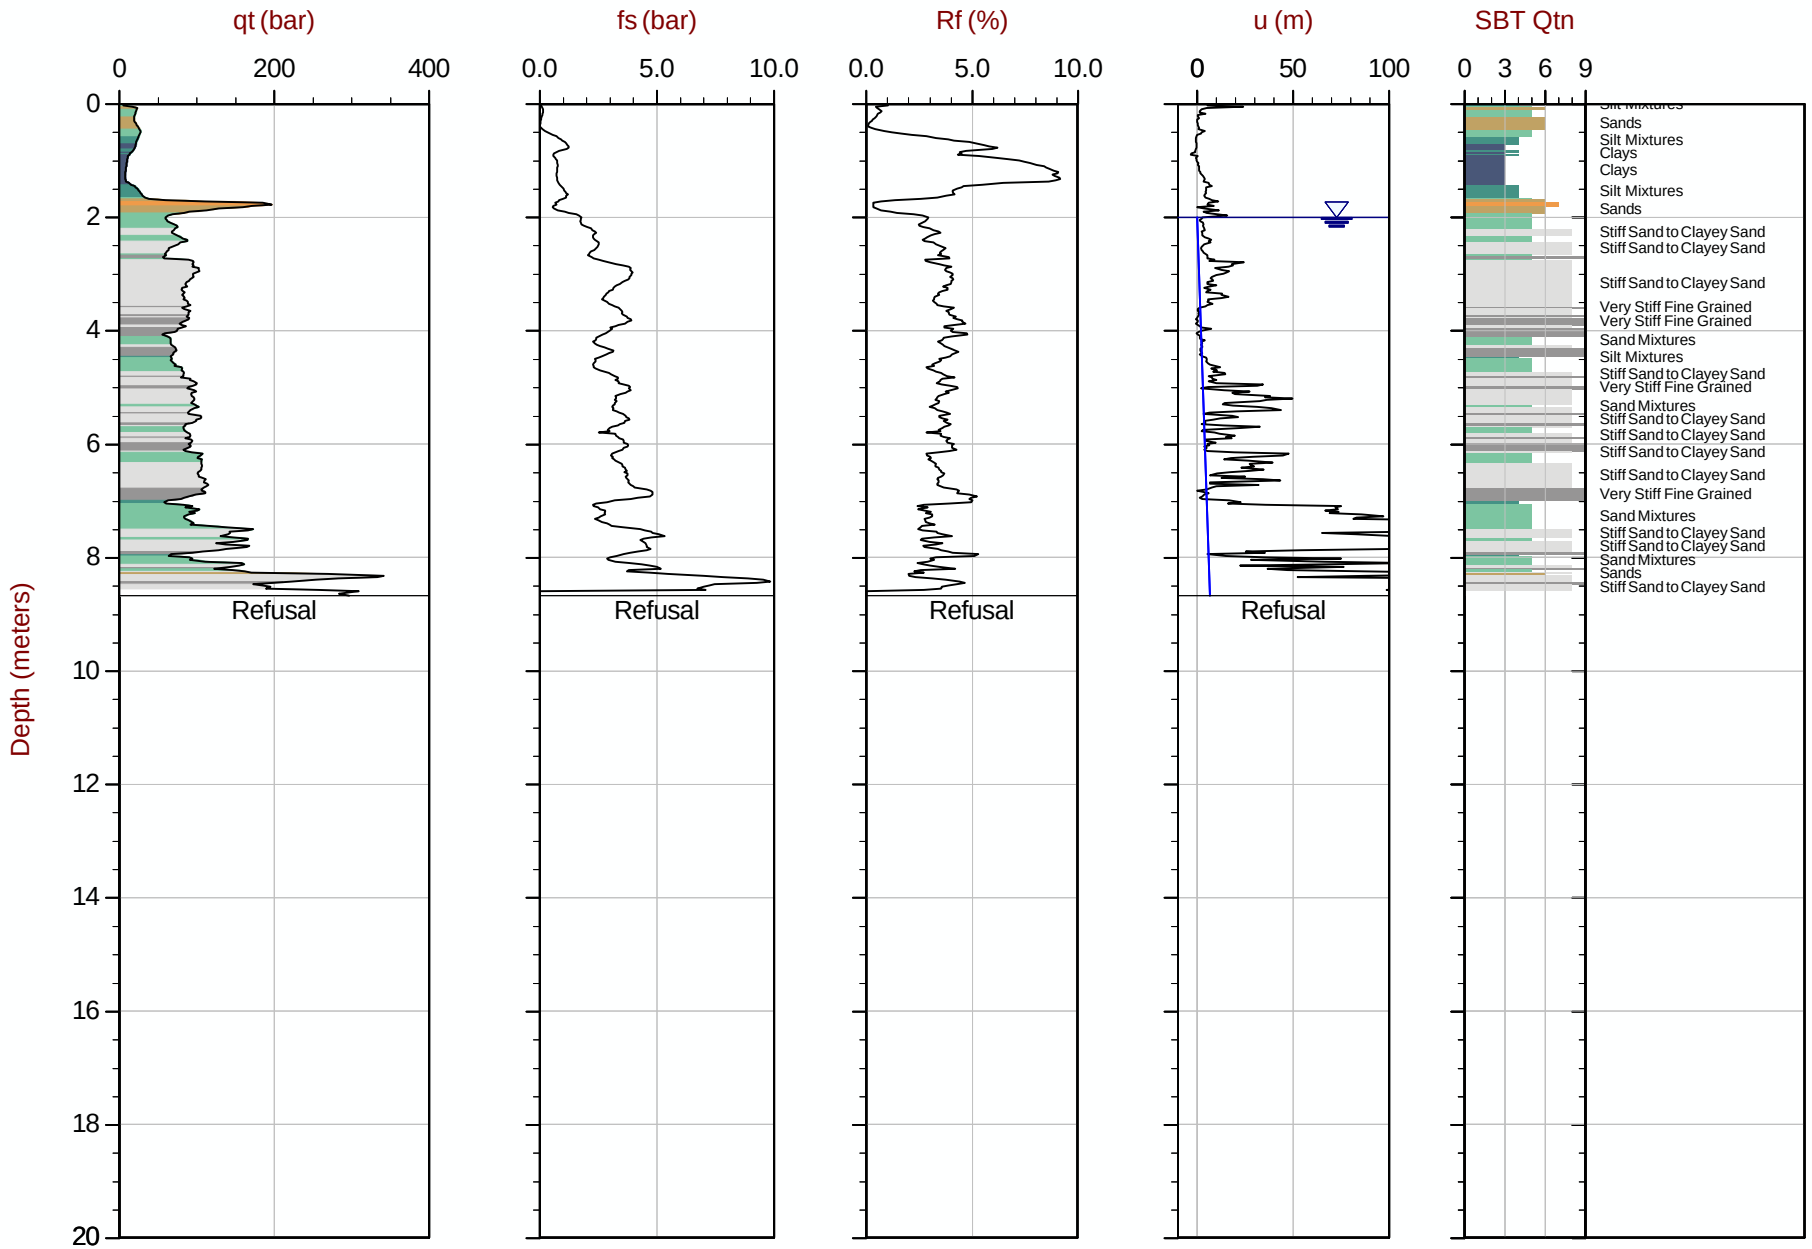

Max Depth: 8.675 m / 28.46 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT350.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609433m E: 415811m Elev: 772.579m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 09:30
Site: Brooks, Alberta

Sounding: RCPT22-22CPT351
Cone: 854:T1500F15U35 Area= 15cm2

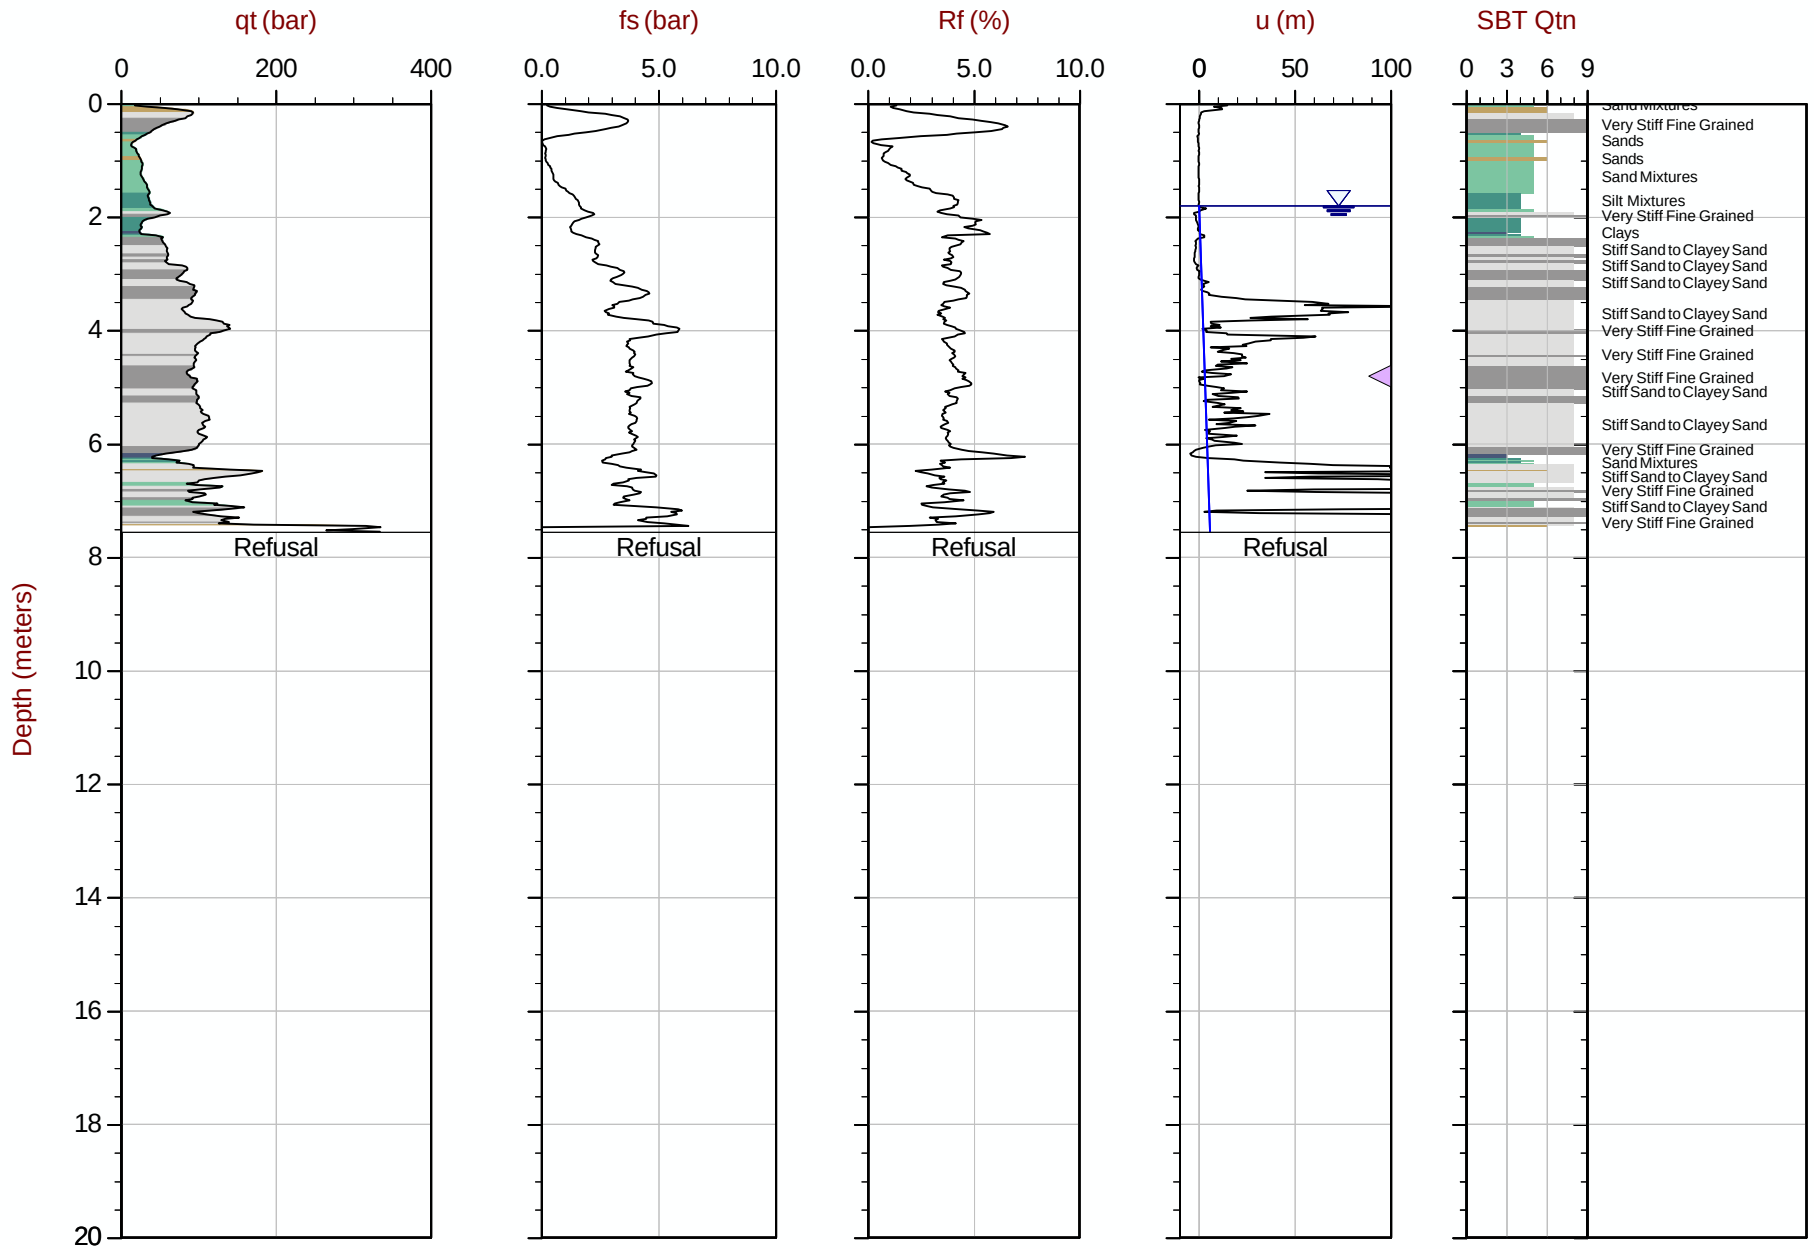

Max Depth: 7.550 m / 24.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT351.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609432m E: 415711m Elev: 772.955m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 11:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT352
Cone: 854:T1500F15U35 Area= 15cm2

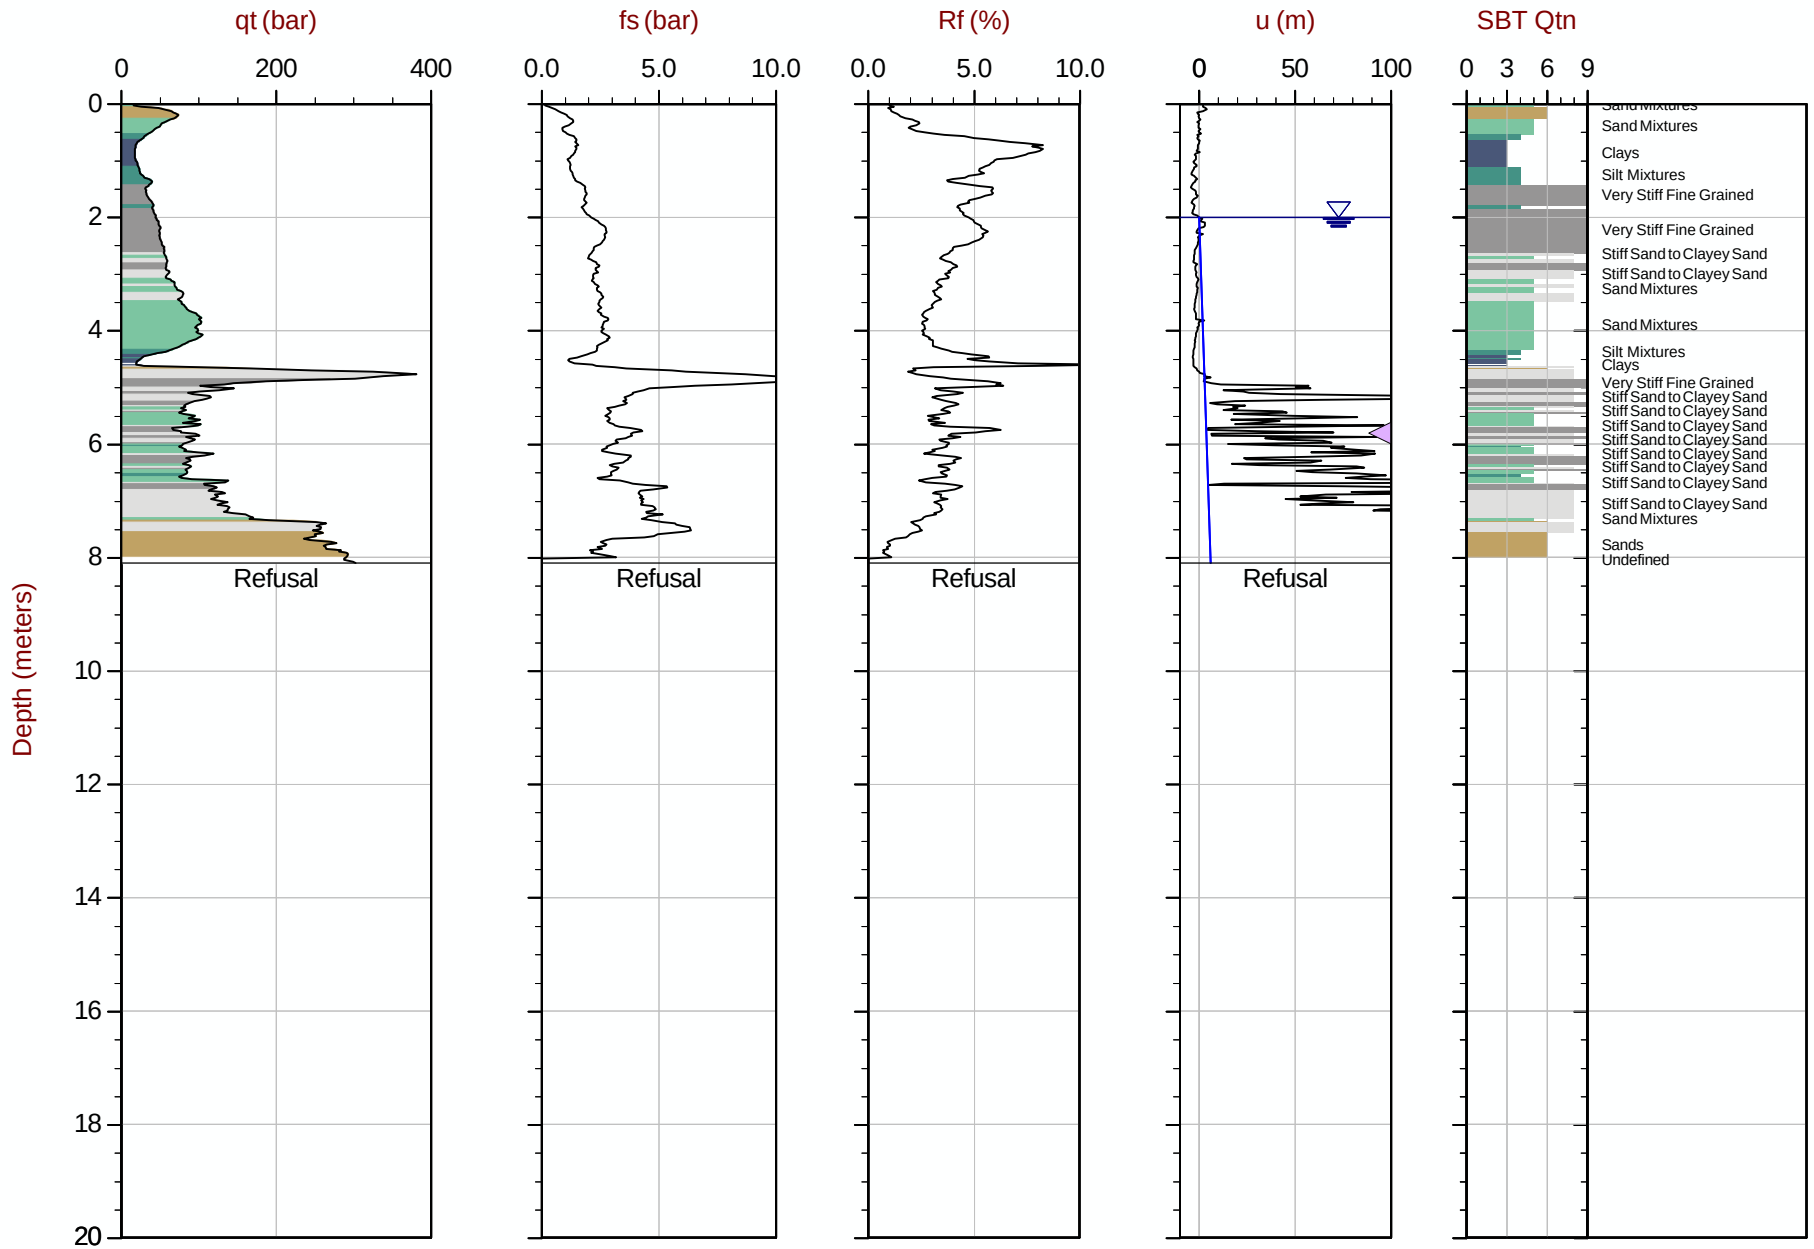

Max Depth: 8.100 m / 26.57 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT352.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609431m E: 415611m Elev: 773.677m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 14:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353
Cone: 854:T1500F15U35 Area= 15cm2

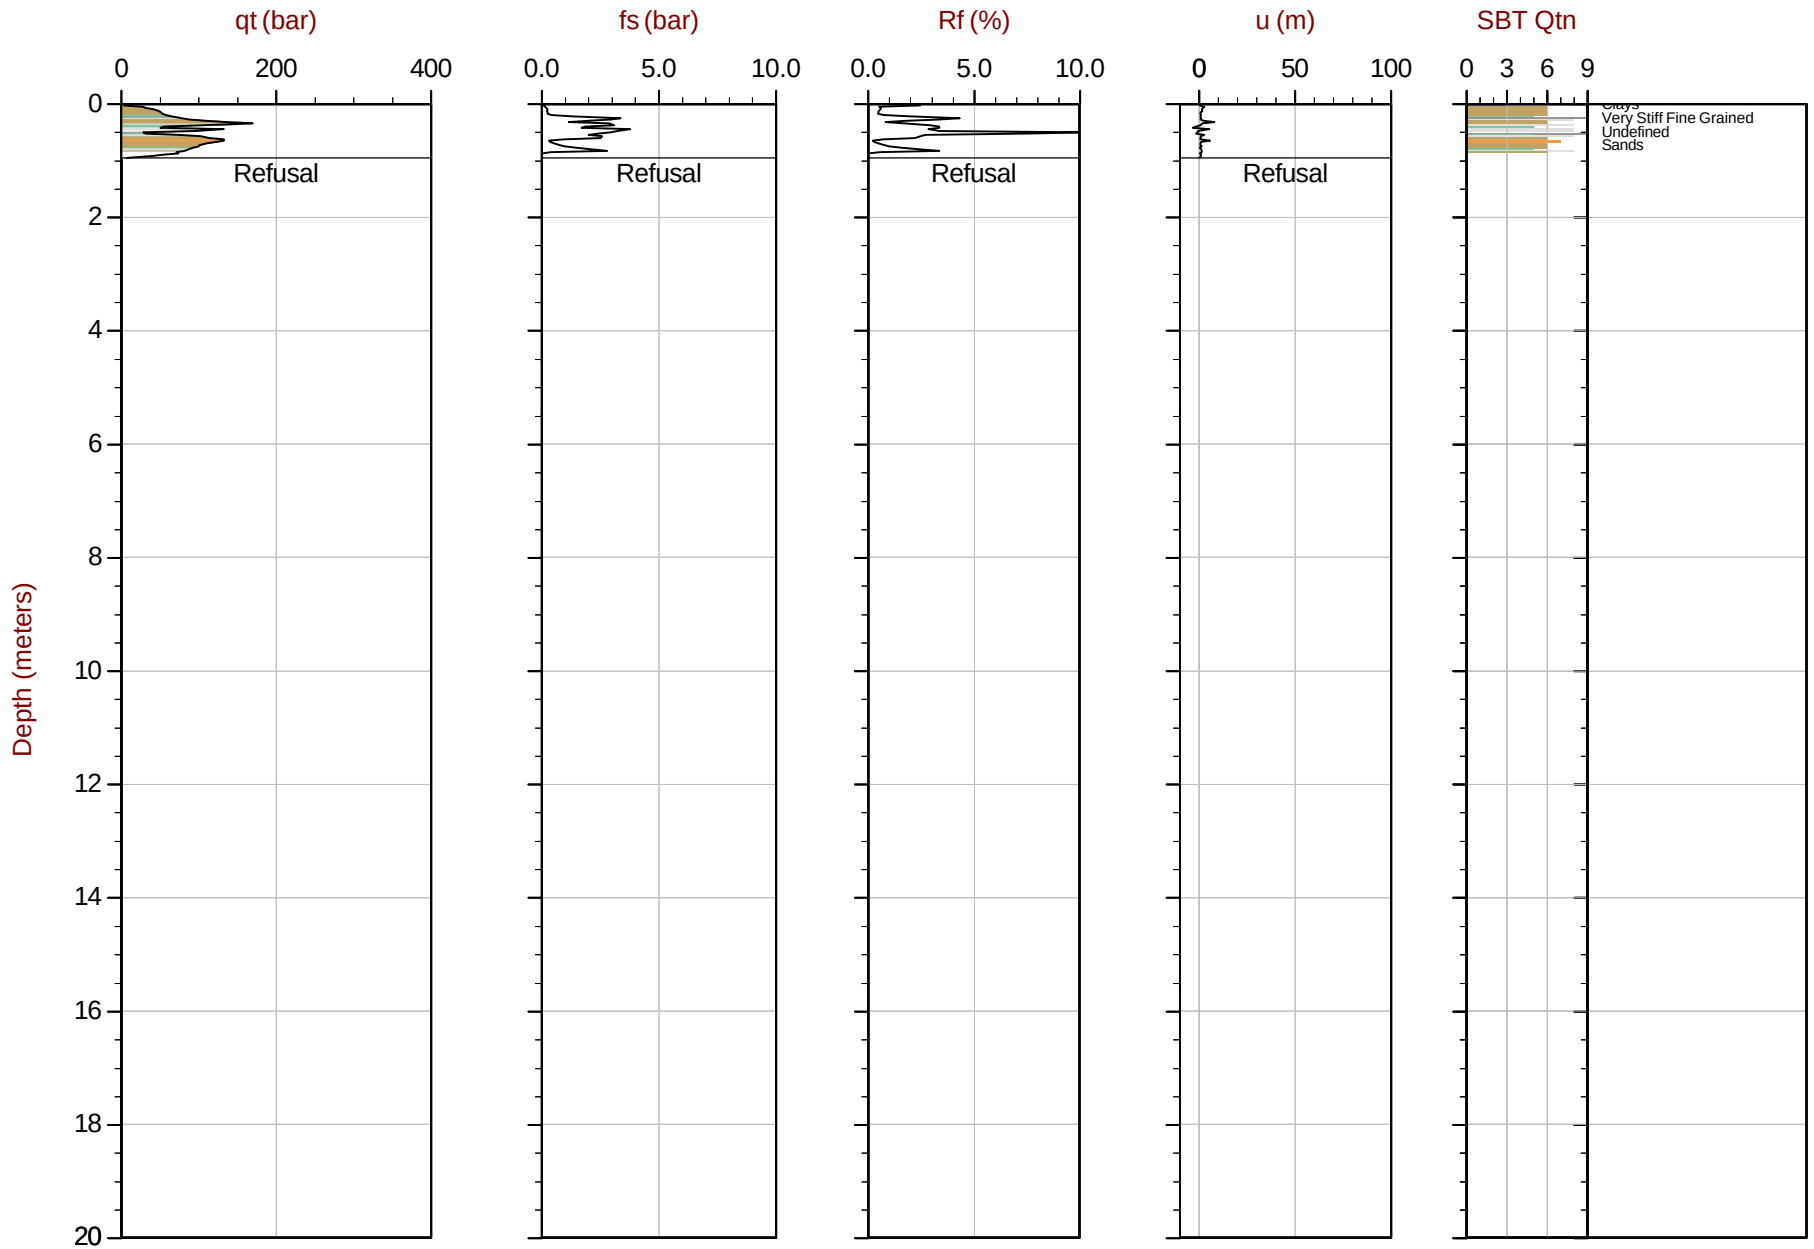

Max Depth: 0.950 m / 3.12 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT353.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609429m E: 415511m Elev: 774.095m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 15:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353B
Cone: 854:T1500F15U35 Area= 15cm2

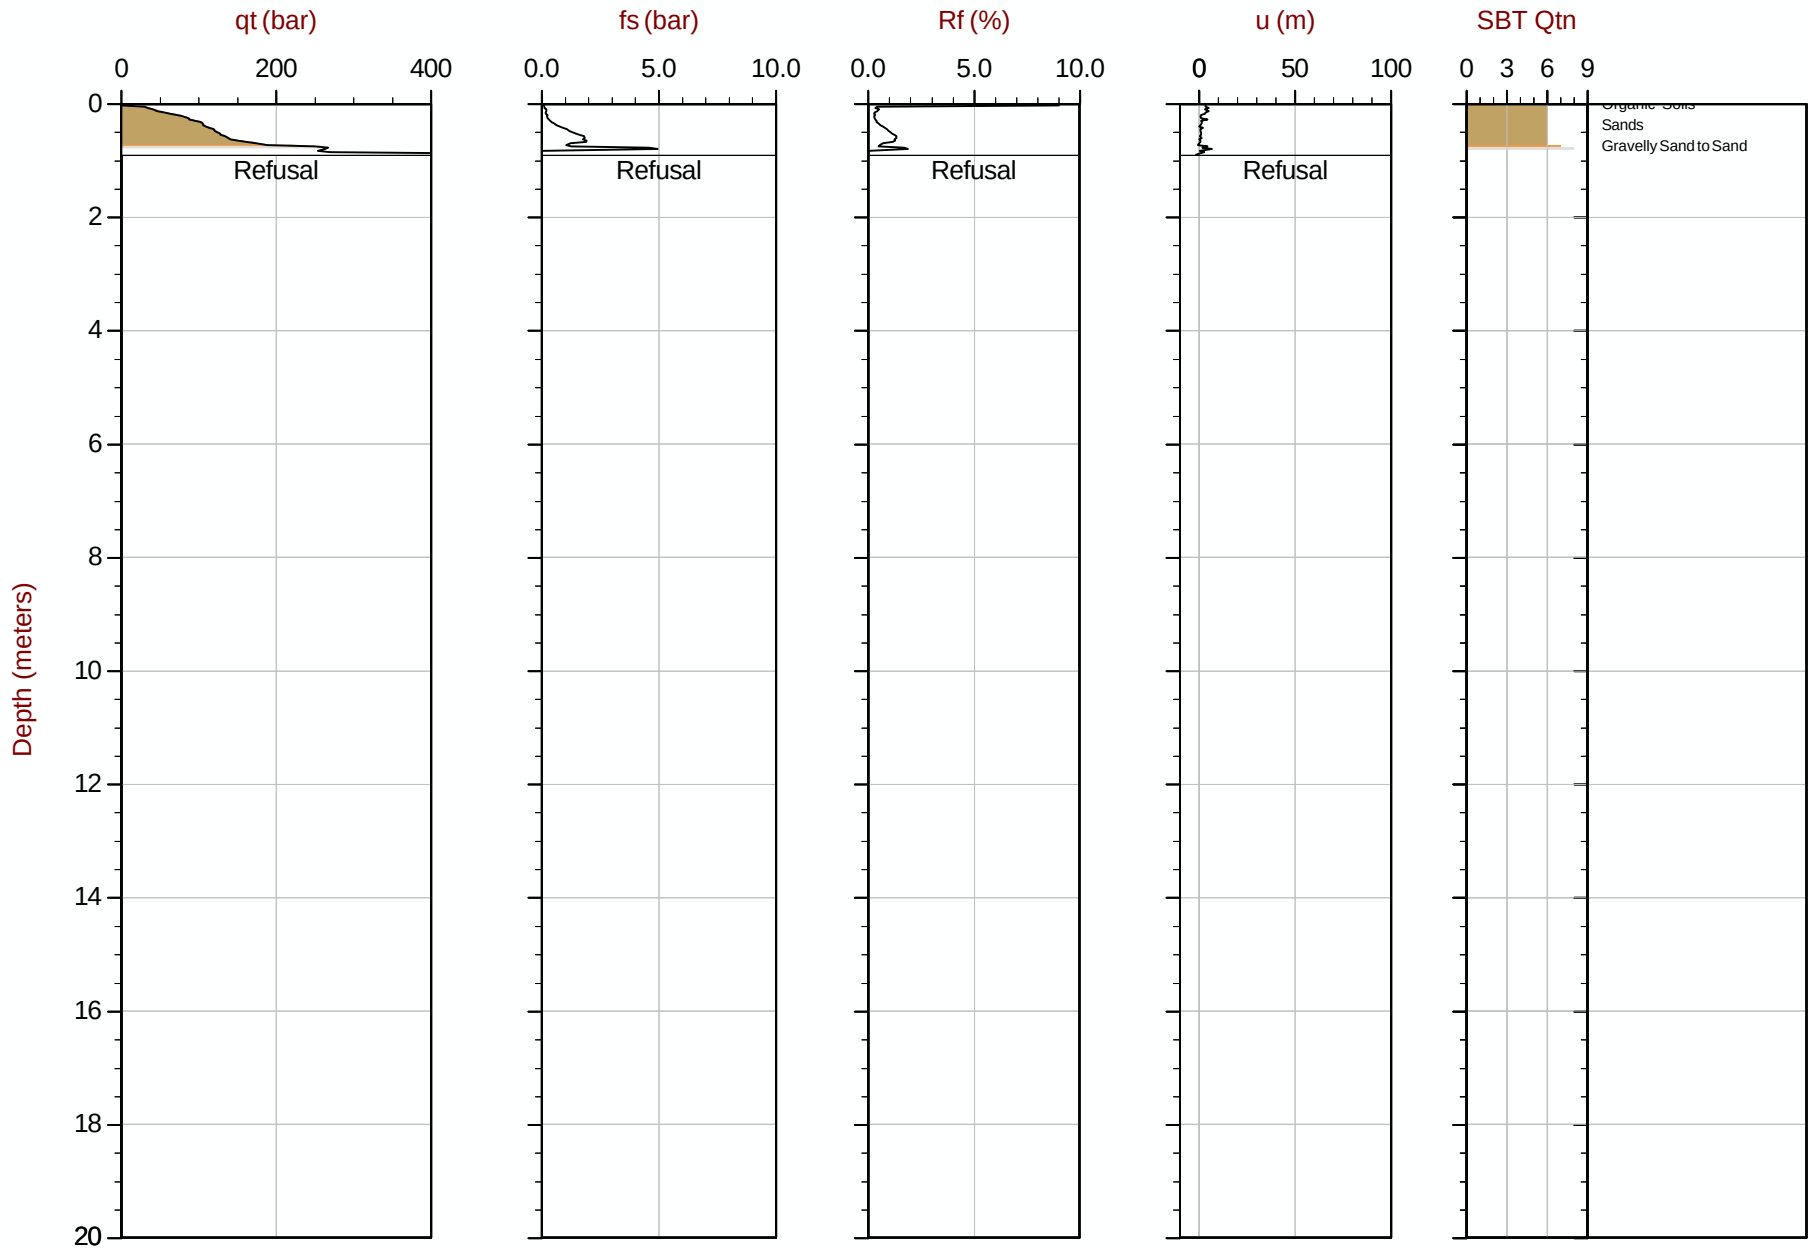

Max Depth: 0.900 m / 2.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT353B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609427m E: 415511m Elev: 774.100m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 15:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353C
Cone: 854:T1500F15U35 Area= 15cm2

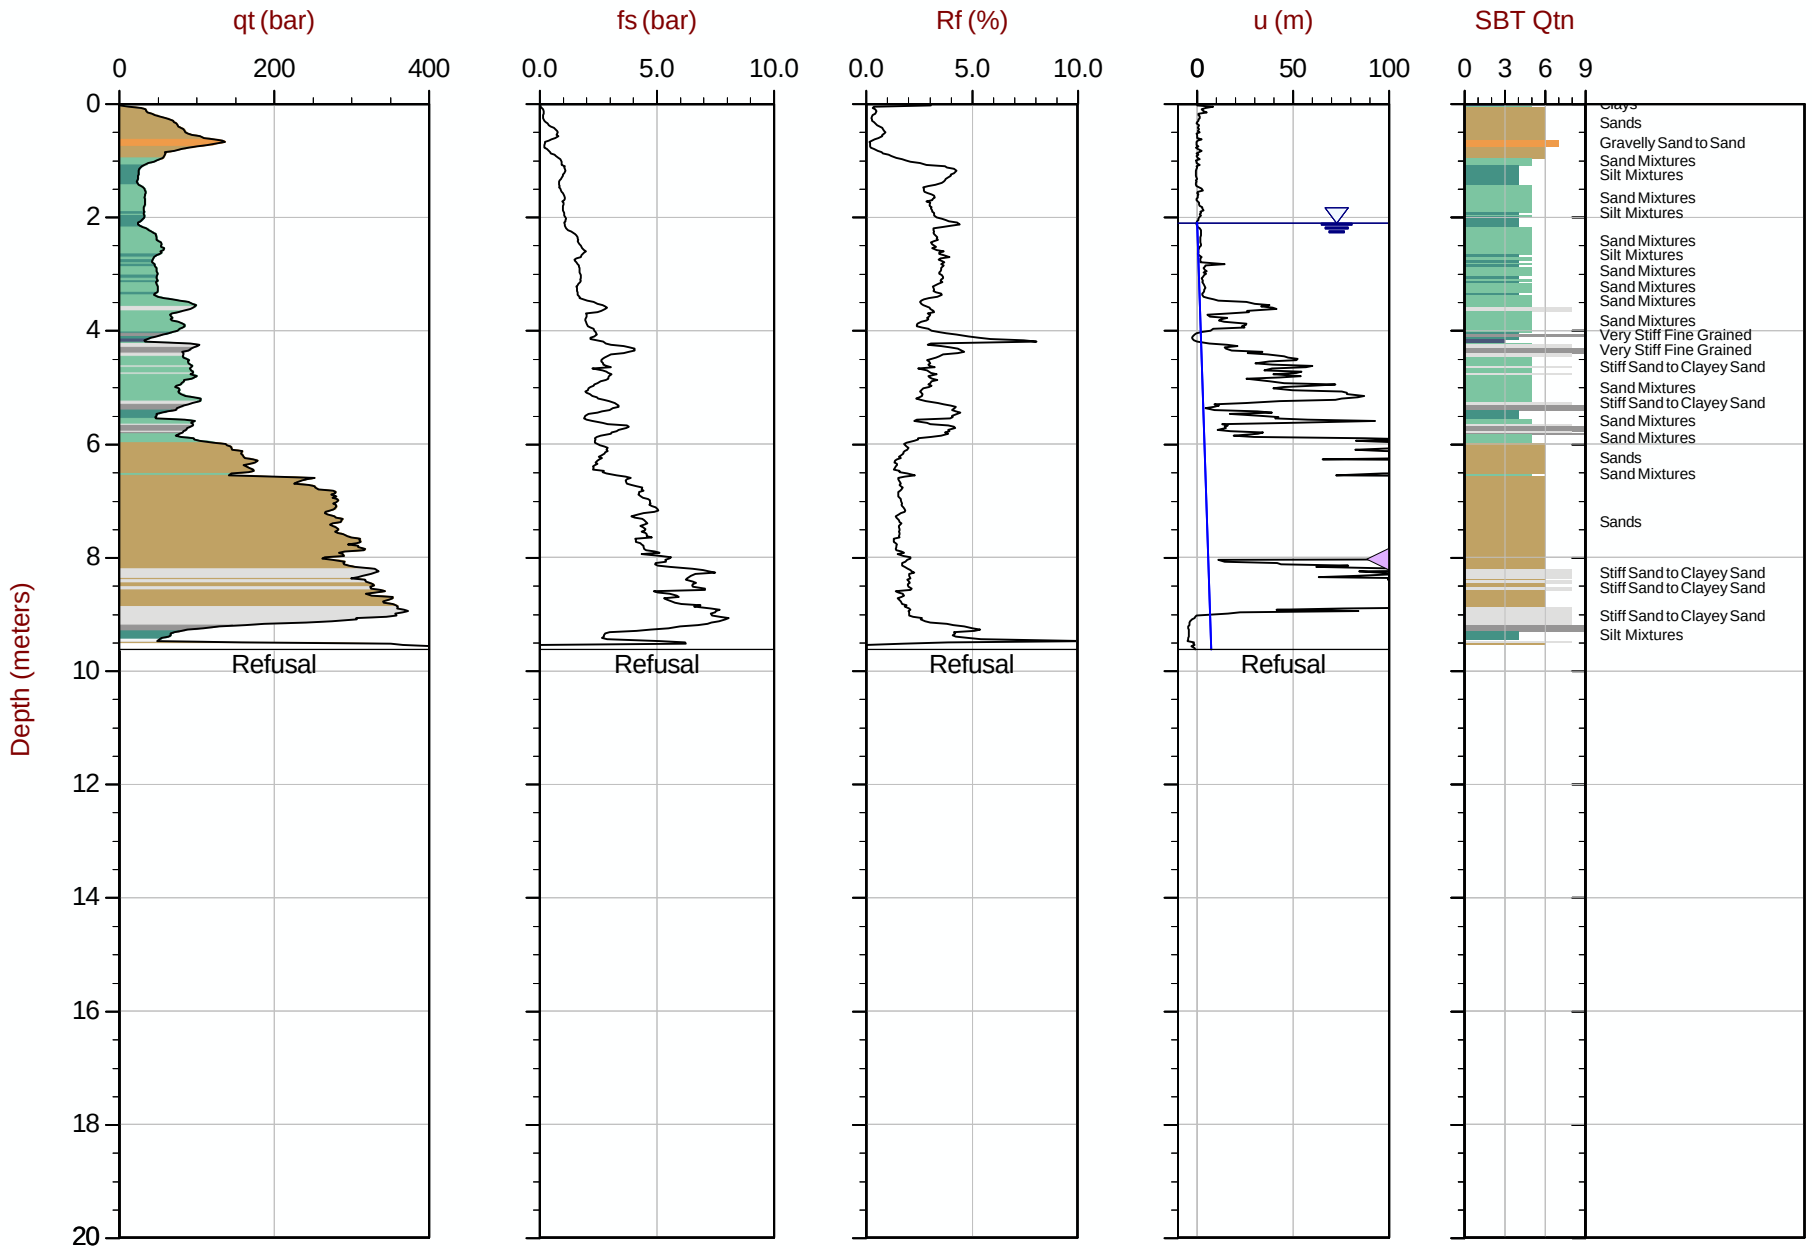

Max Depth: 9.625 m / 31.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT353C.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609425m E: 415511m Elev: 774.000m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 08:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT354
Cone: 854:T1500F15U35 Area= 15cm2

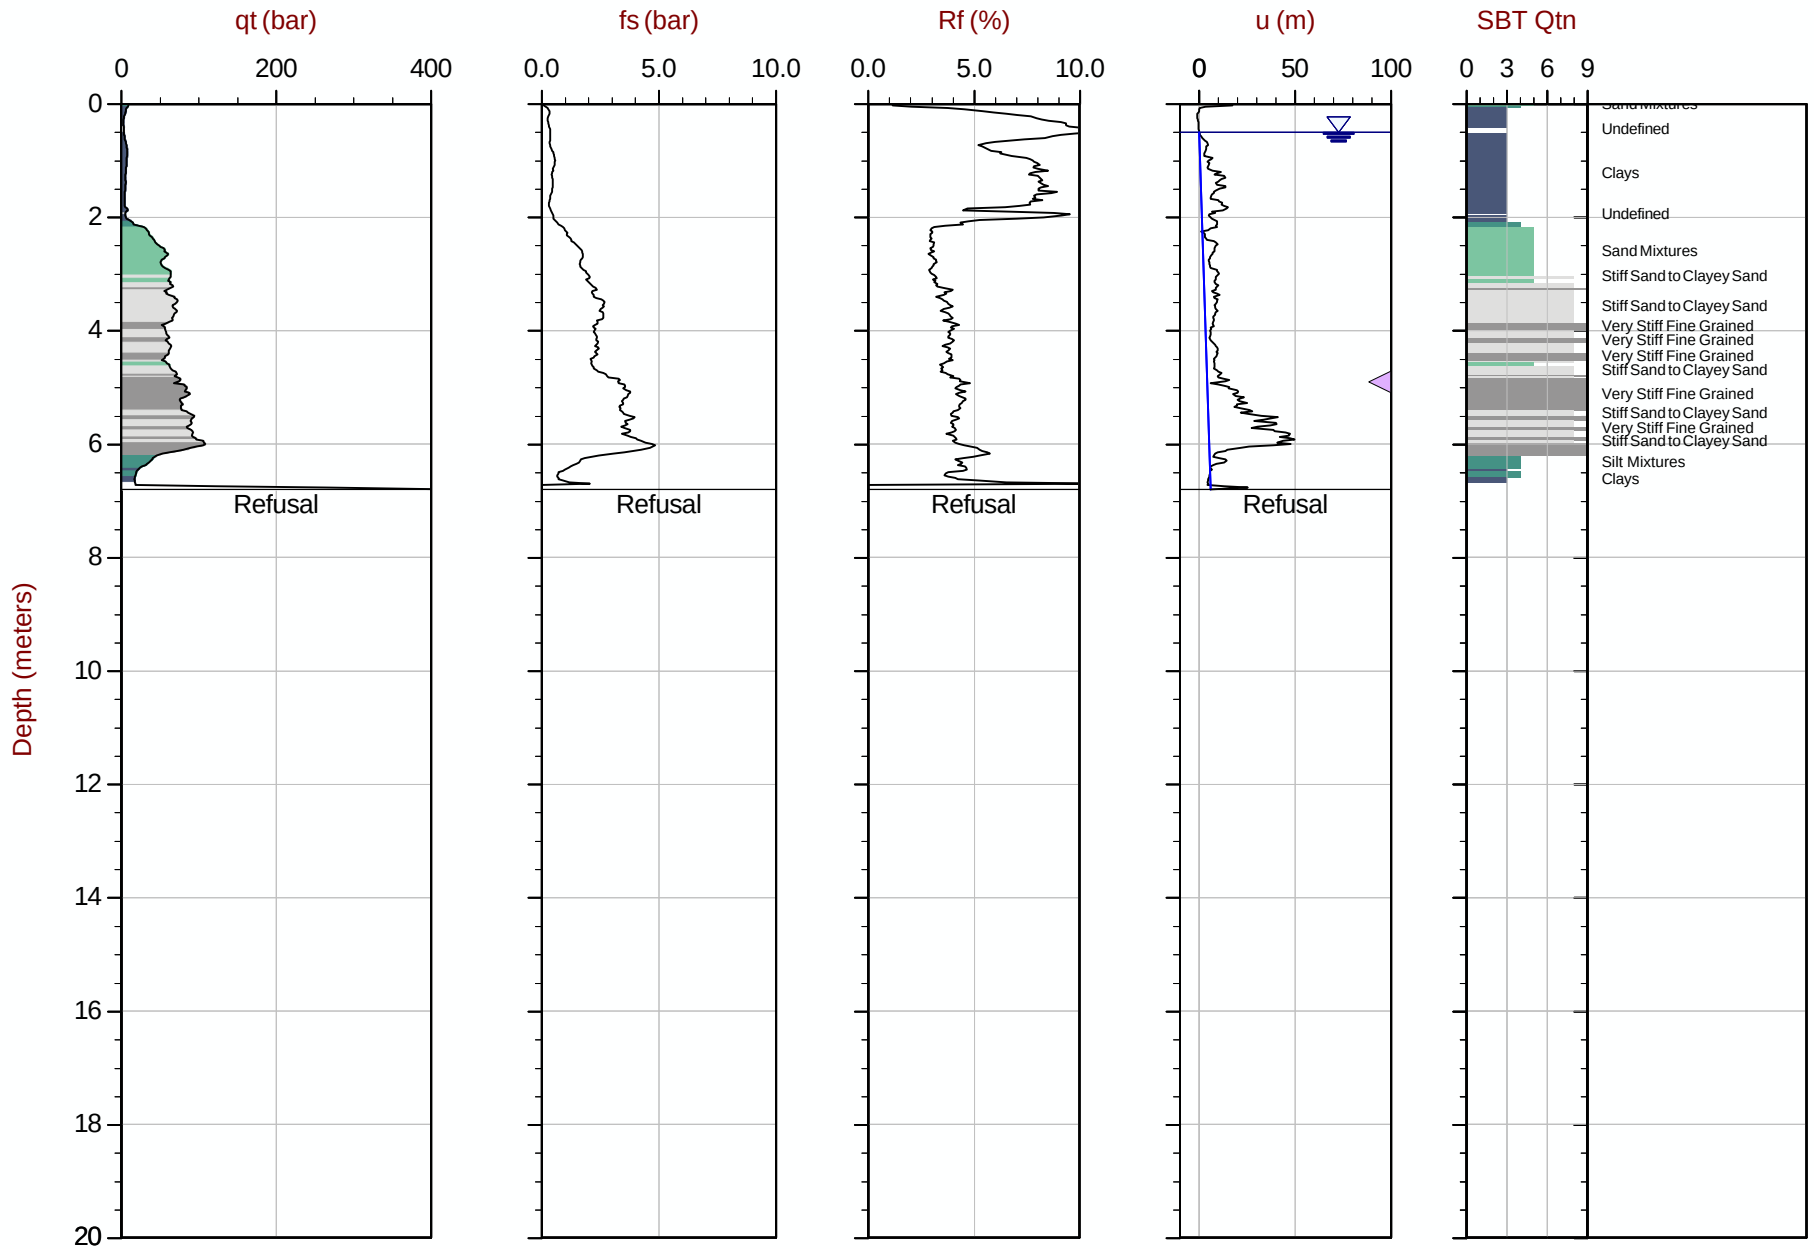

Max Depth: 6.800 m / 22.31 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT354.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 415411m Elev: 774.082m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 11:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT355
Cone: 854:T1500F15U35 Area= 15cm2

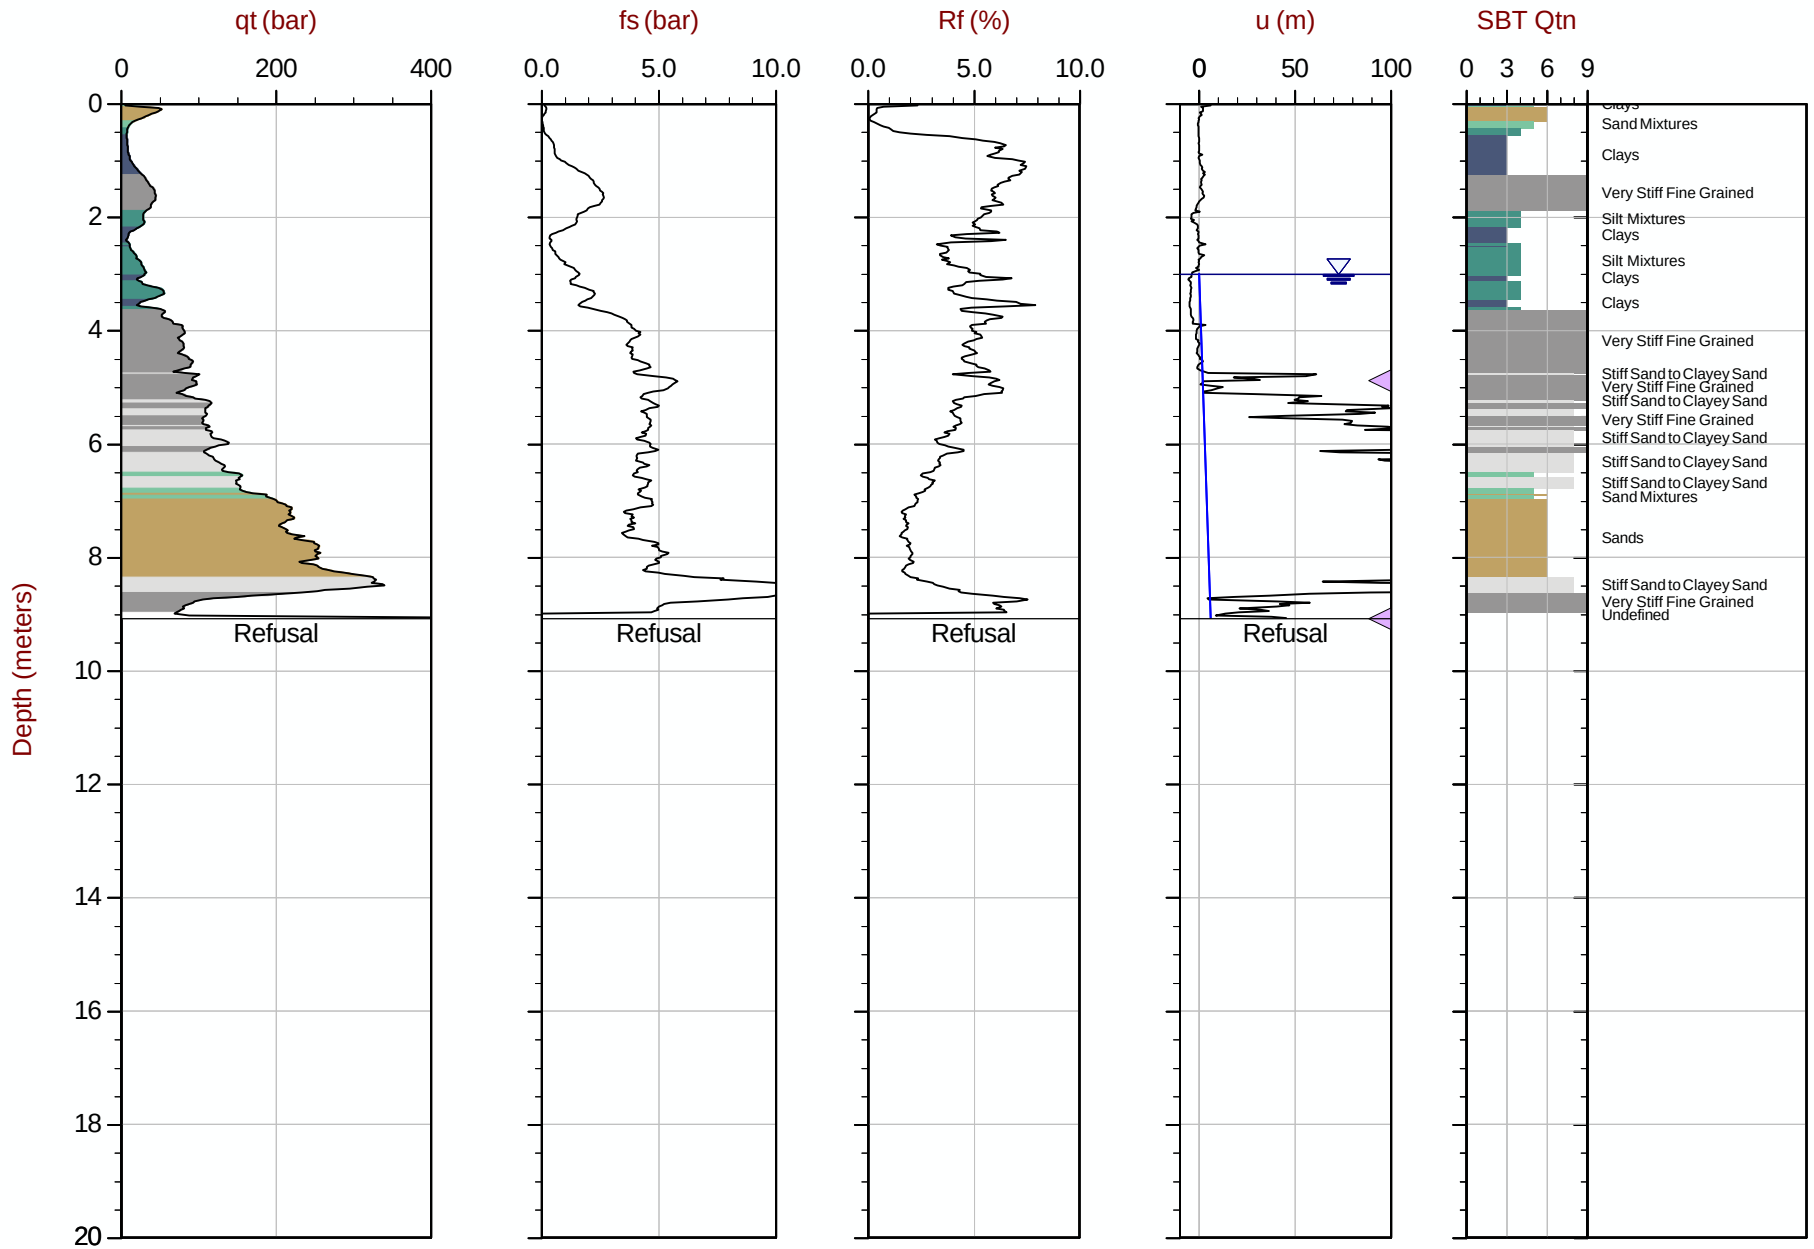

Max Depth: 9.075 m / 29.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT355.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 415311m Elev: 775.422m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 15:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT356
Cone: 854:T1500F15U35 Area= 15cm2

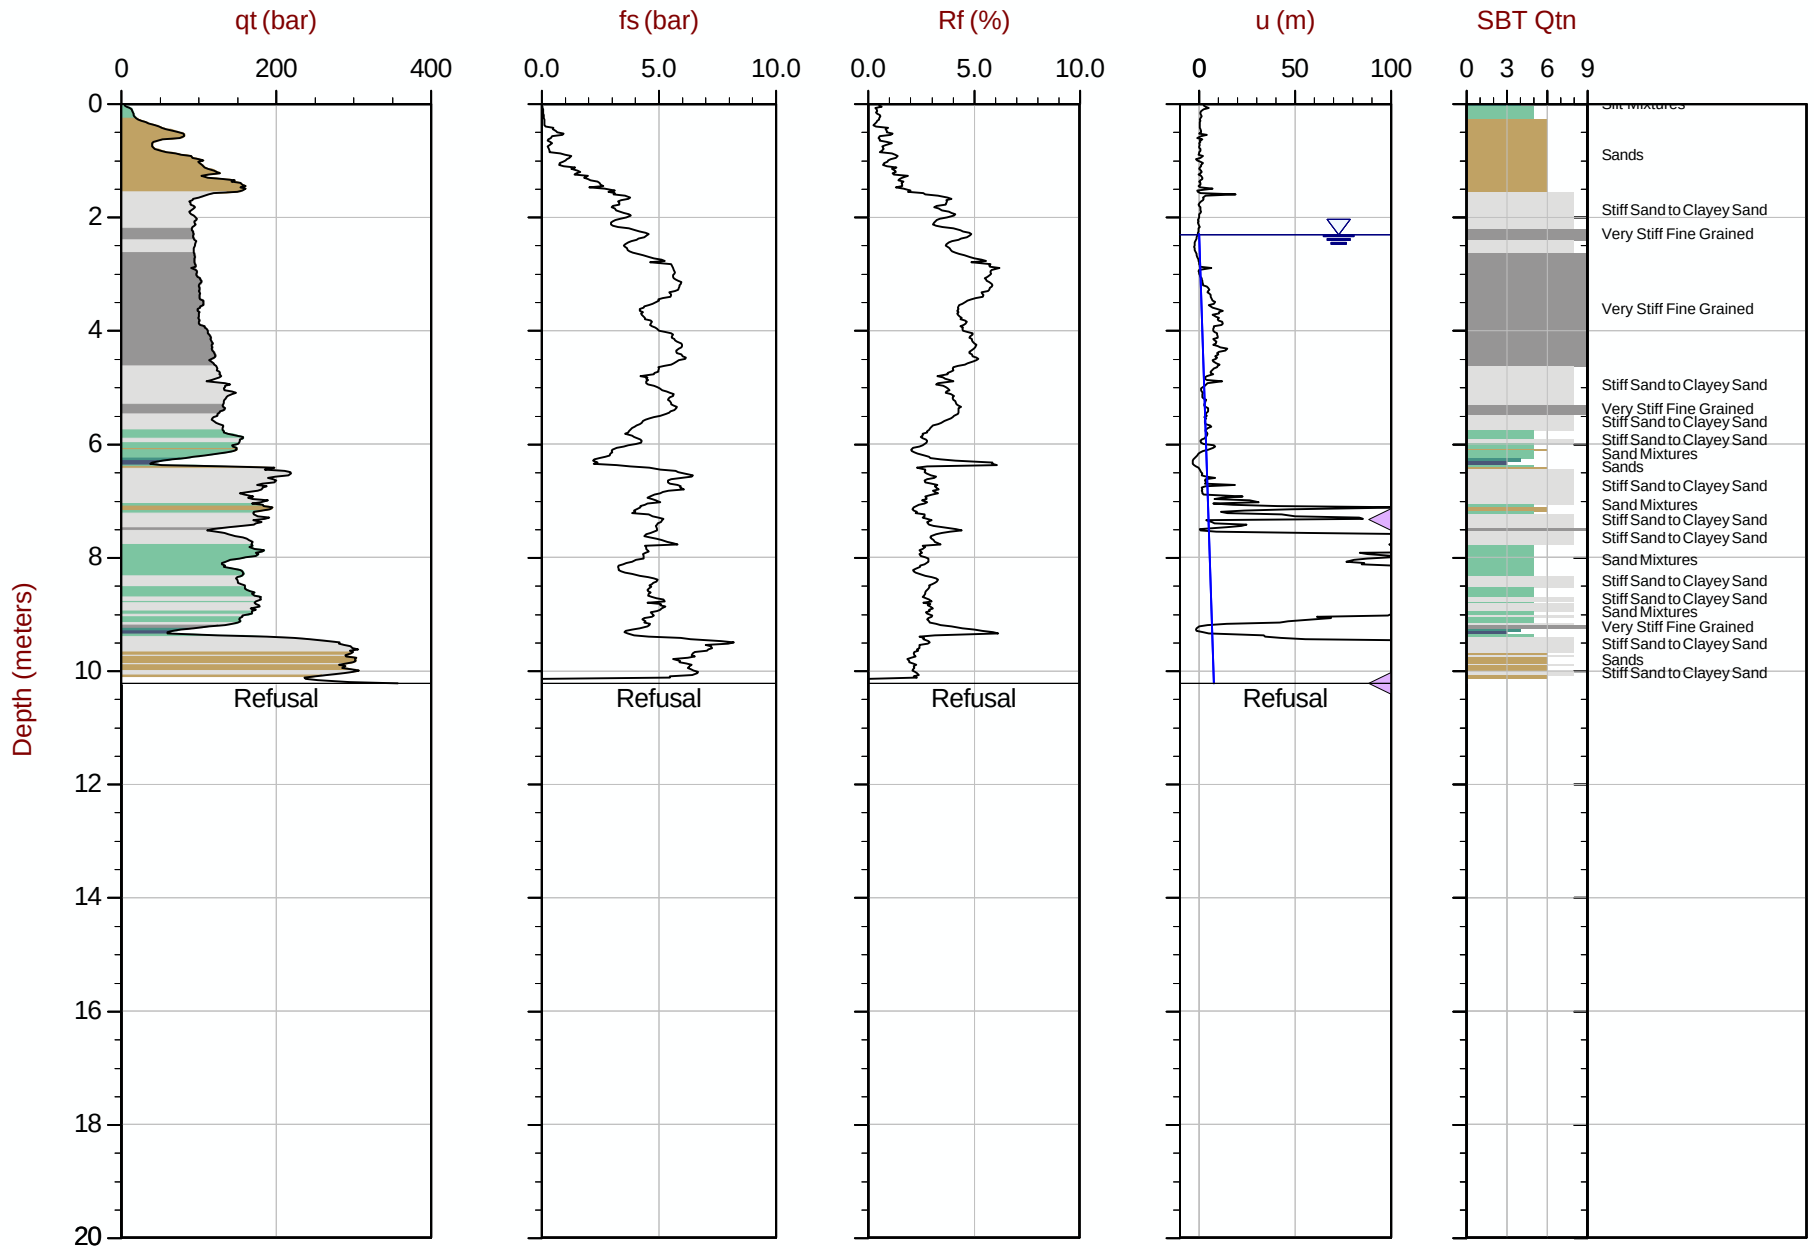

Max Depth: 10.225 m / 33.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT356.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 415211m Elev: 778.741m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 09:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT357
Cone: 854:T1500F15U35 Area= 15cm2

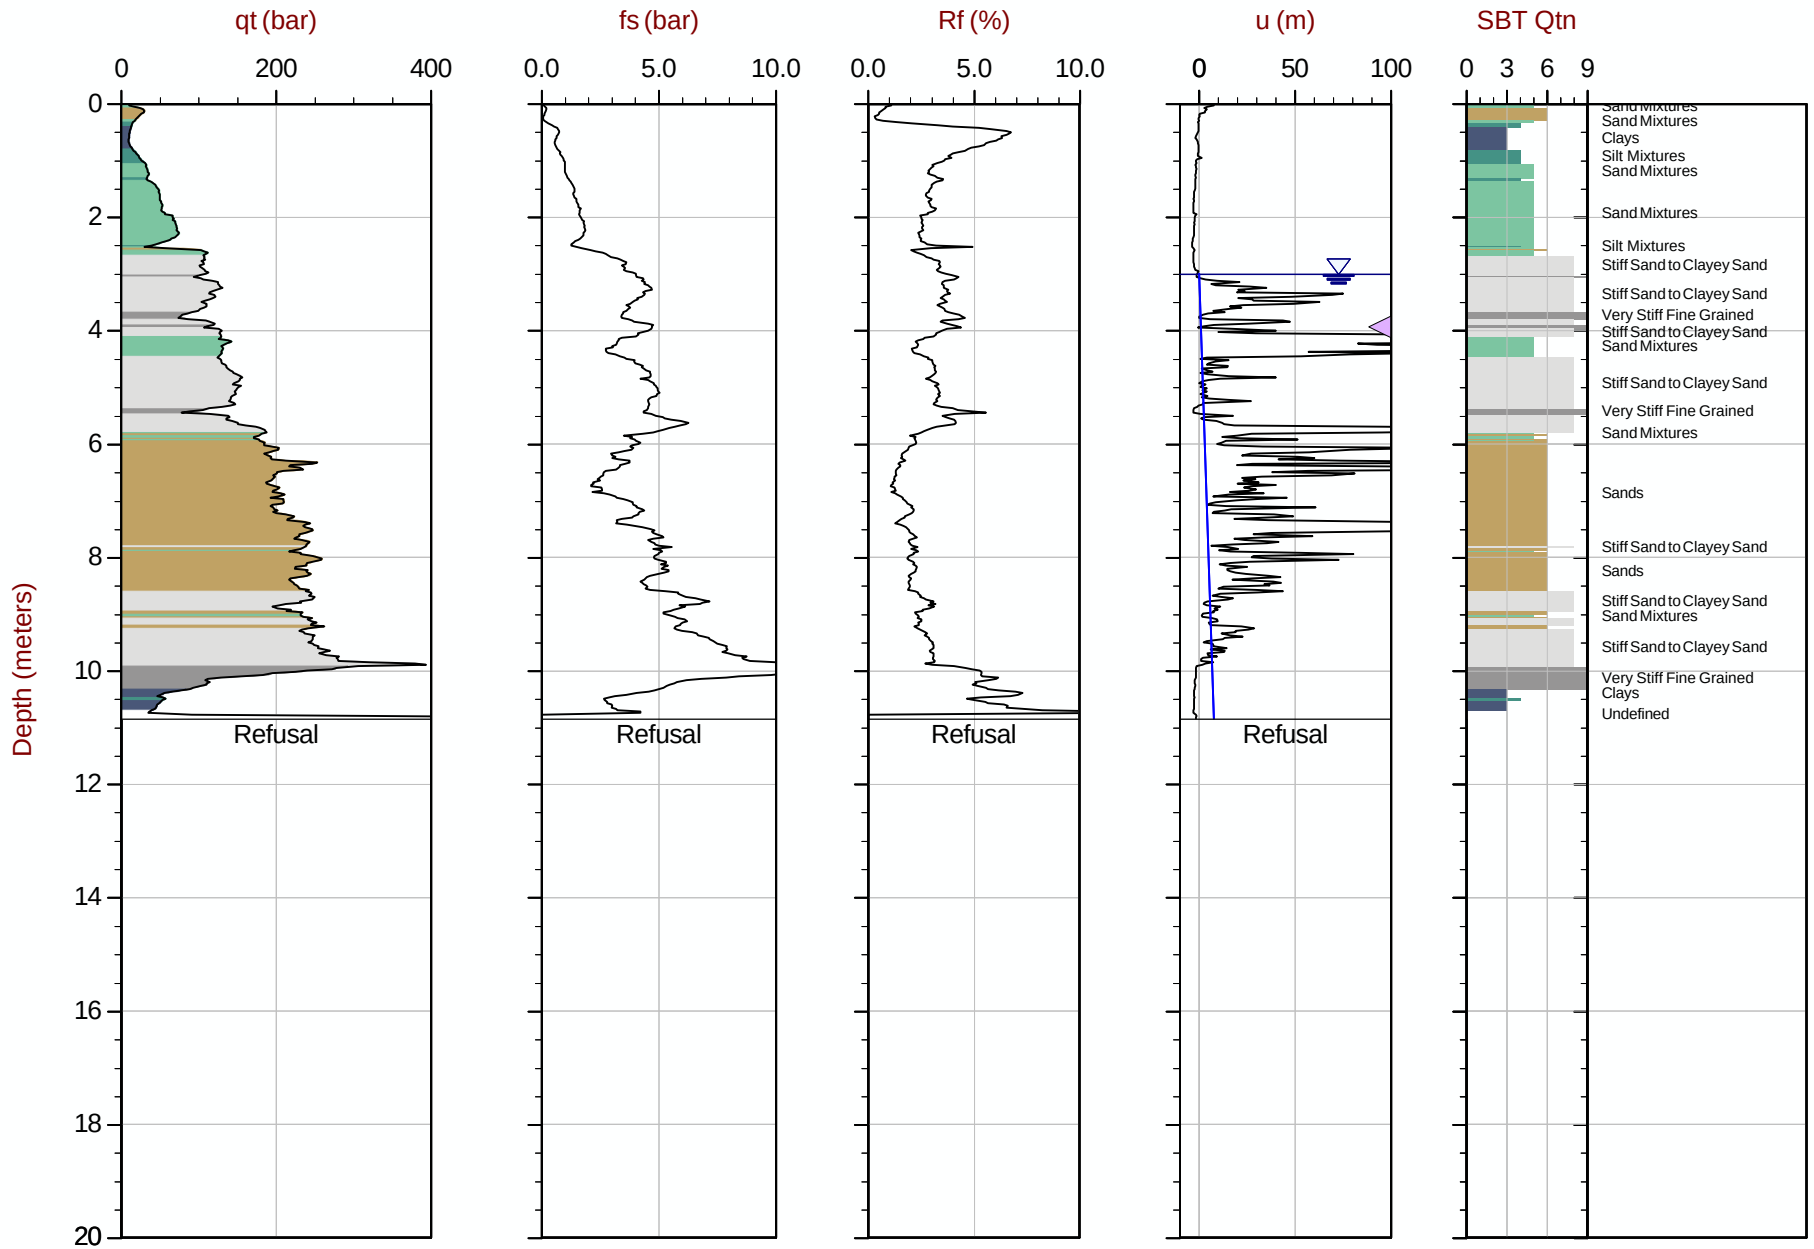

Max Depth: 10.850 m / 35.60 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT357.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 415113m Elev: 776.000m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 11:42
Site: Brooks, Alberta

Sounding: RCPT22-22CPT358
Cone: 750:T1500F15U35 Area= 15cm2

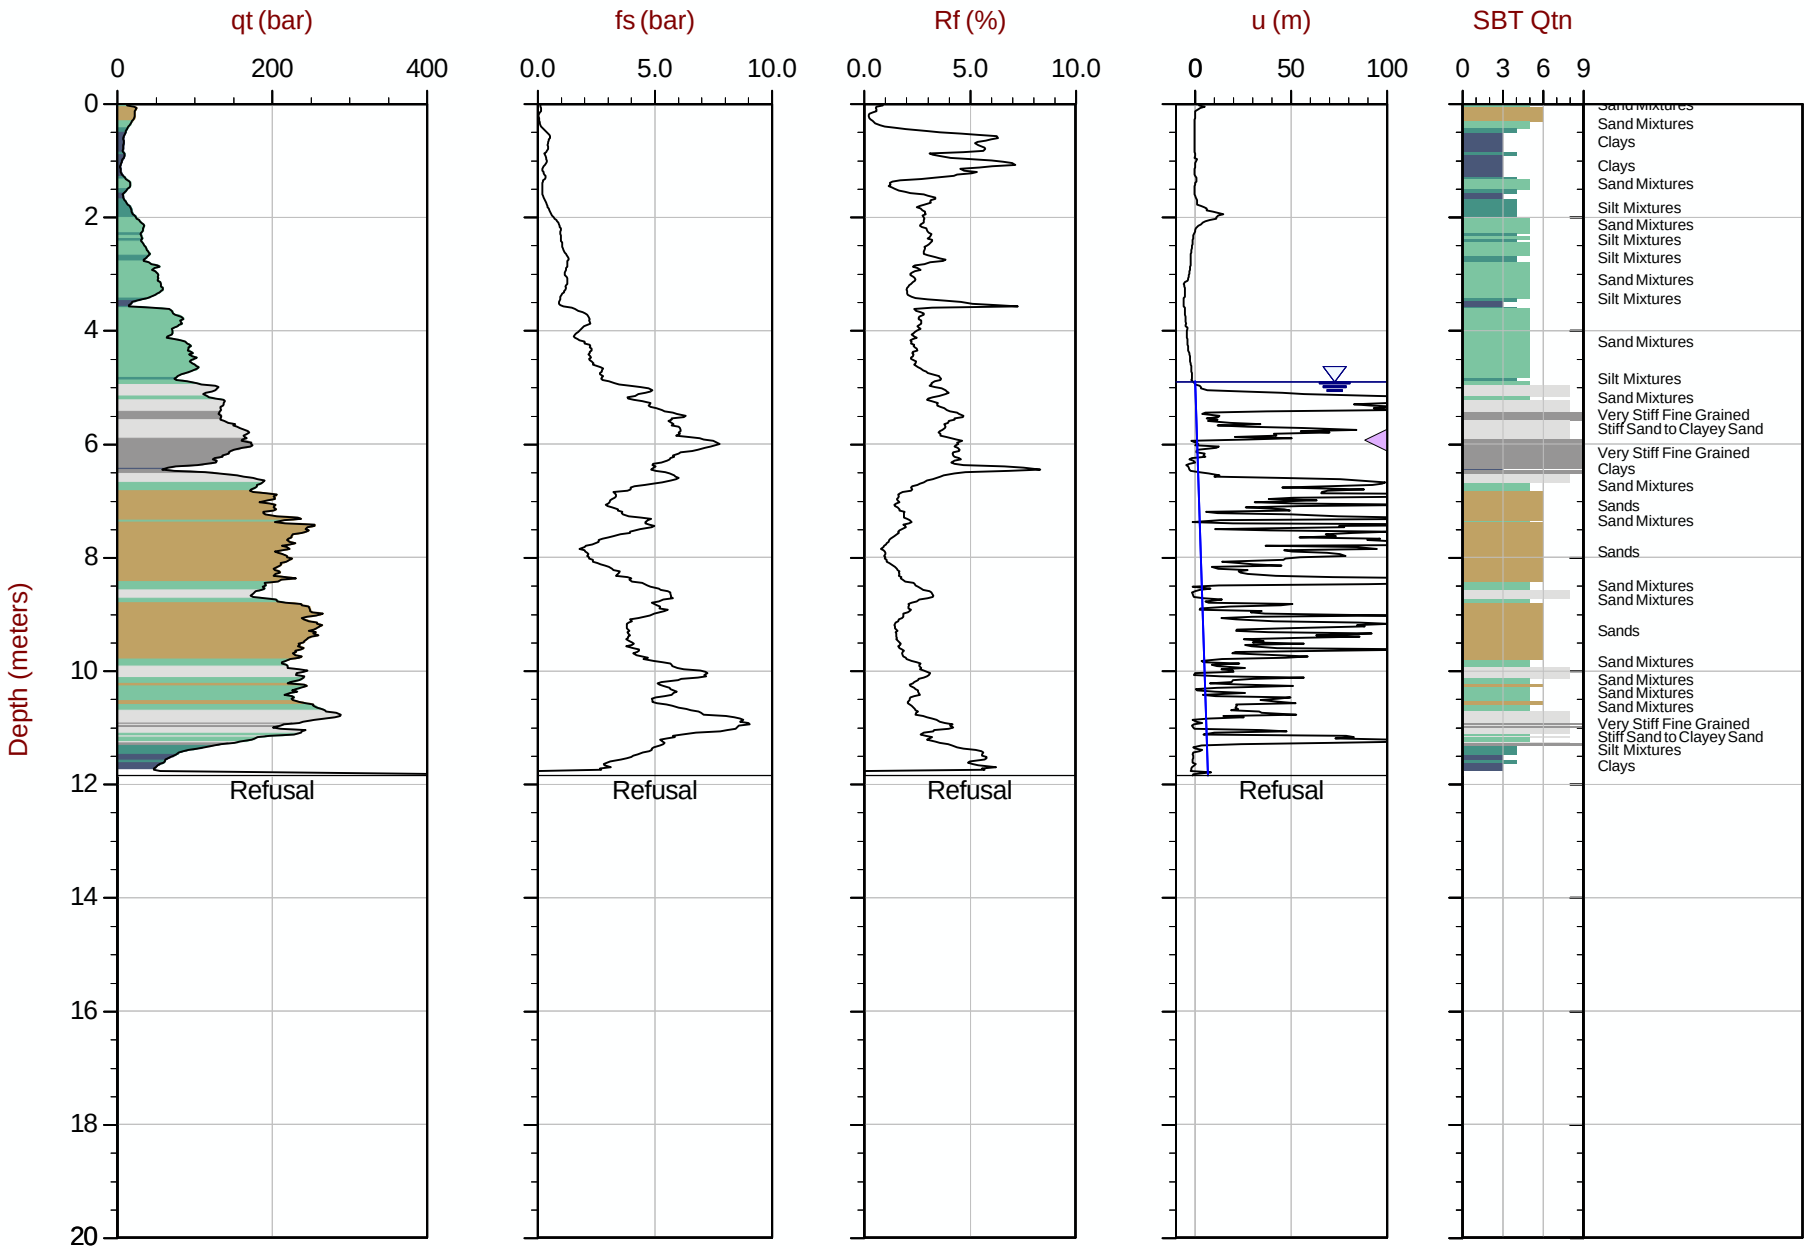

Max Depth: 11.850 m / 38.88 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT358.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609425m E: 415011m Elev: 776.048m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 15:39
Site: Brooks, Alberta

Sounding: RCPT22-22CPT359
Cone: 821:T1000F10U35 Area= 15cm2

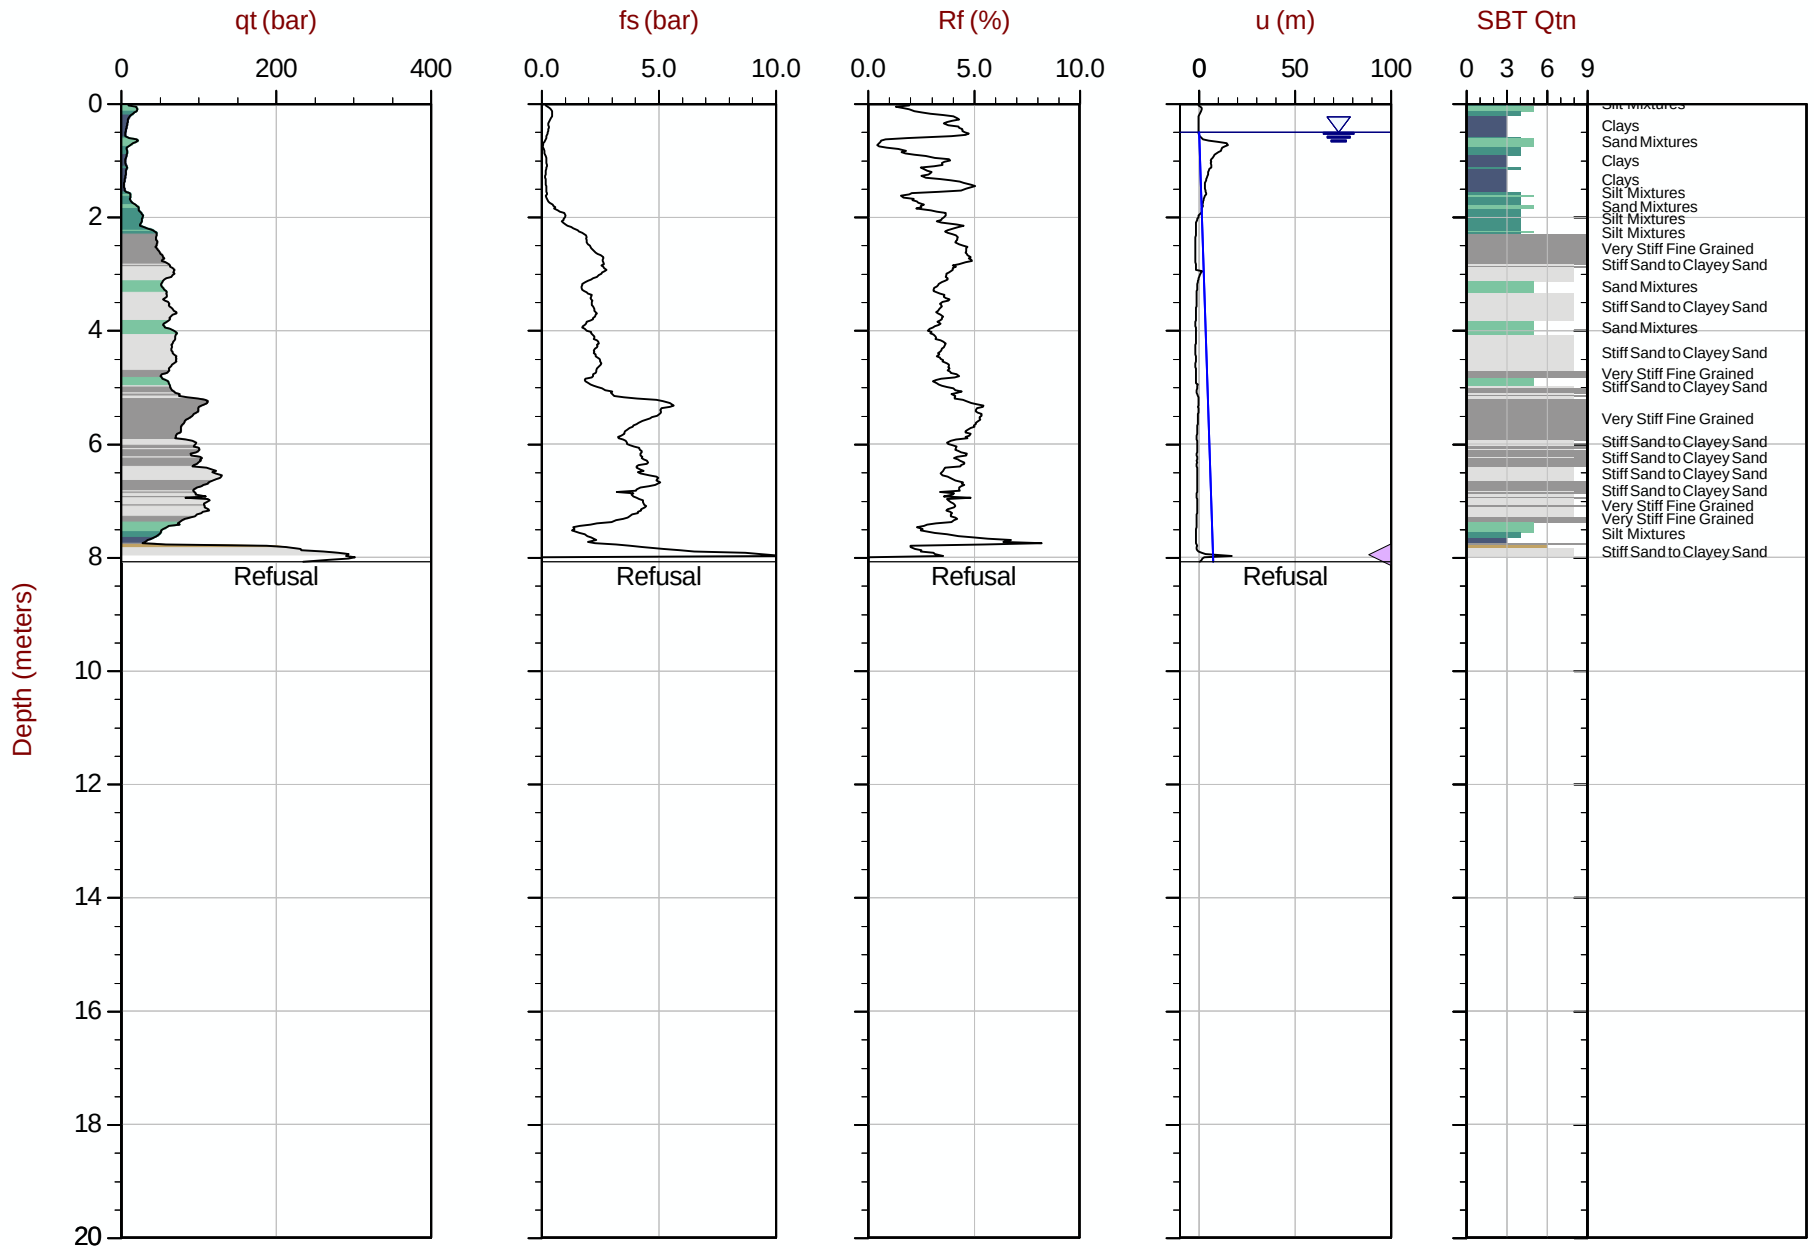

Max Depth: 8.075 m / 26.49 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT359.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 414911m Elev: 776.614m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 07:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT360
Cone: 821:T1000F10U35 Area= 15cm2

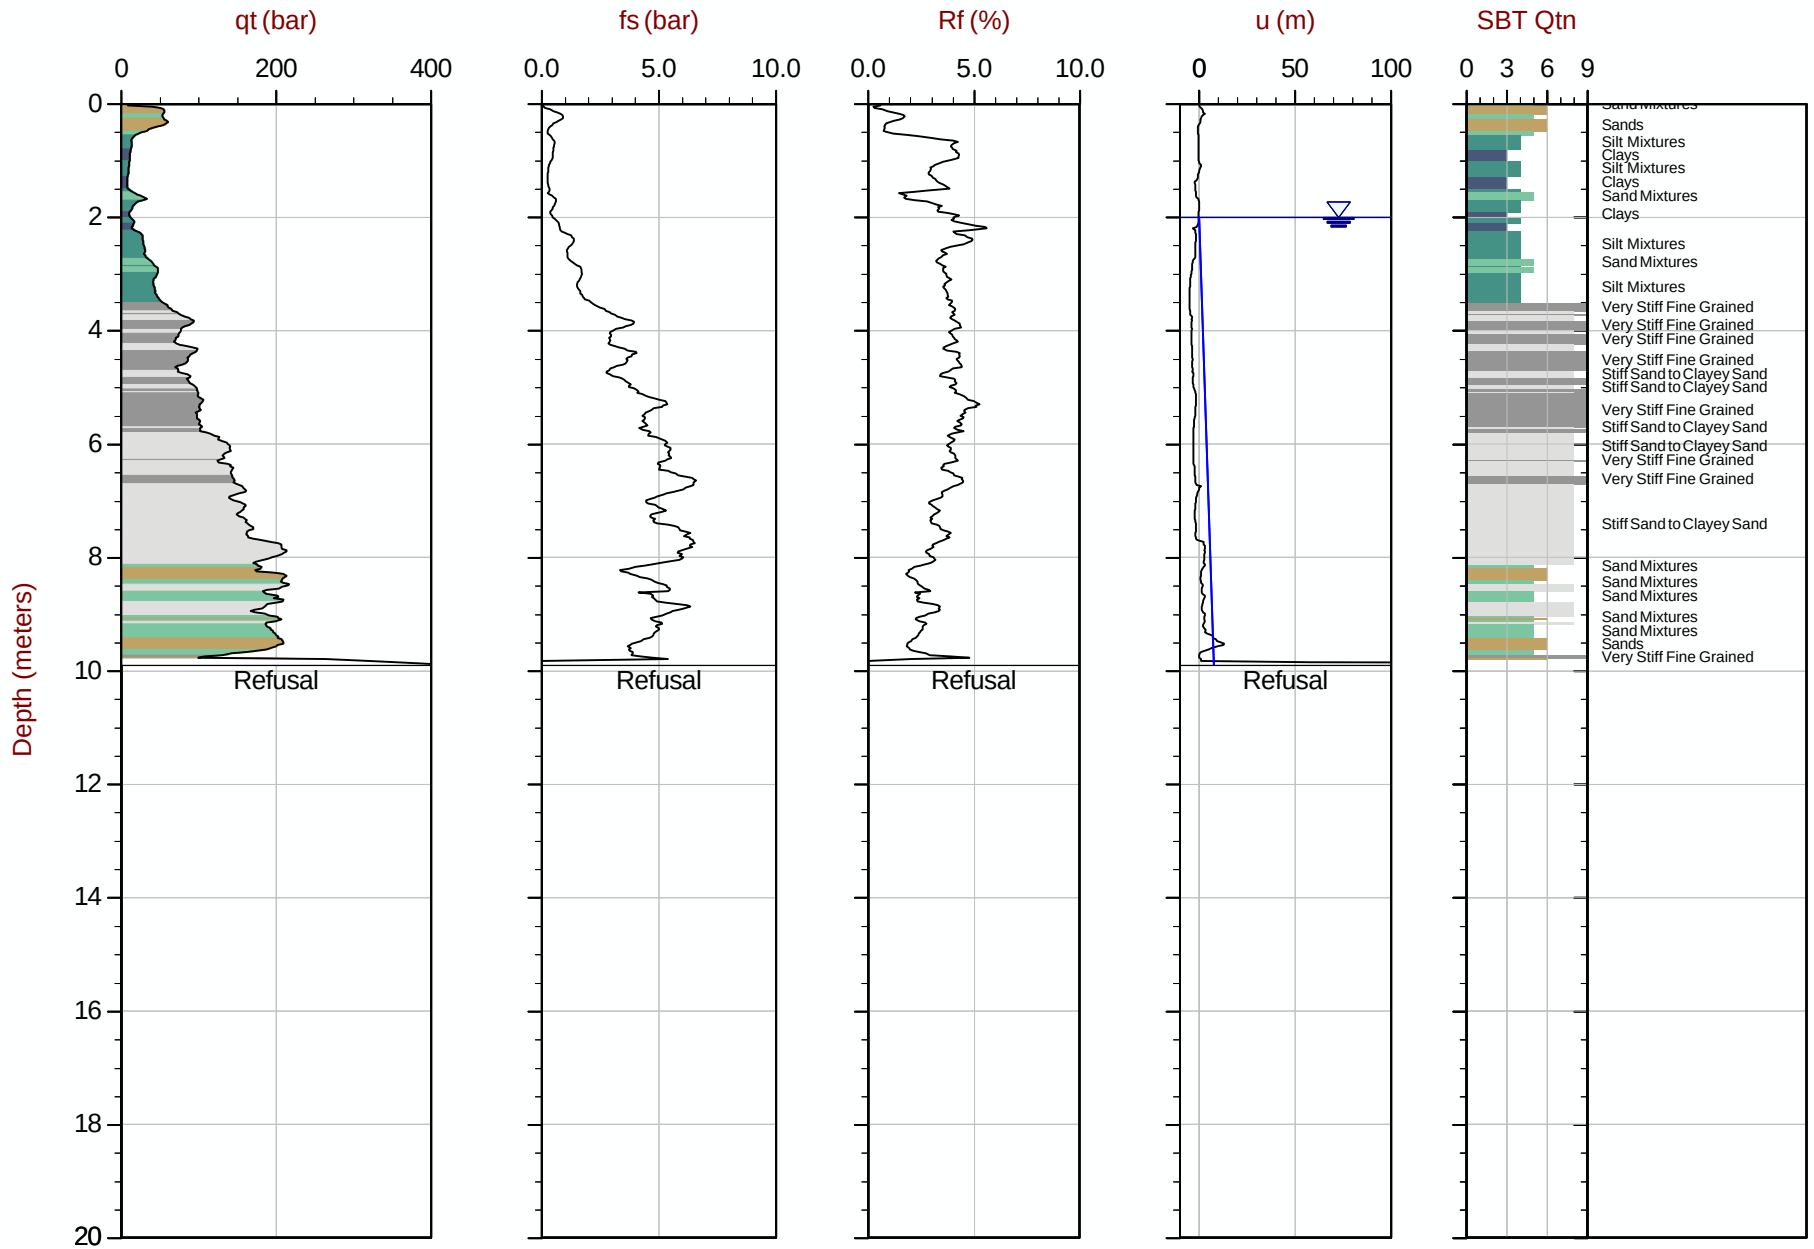

Max Depth: 9.900 m / 32.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT360.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609431m E: 414811m Elev: 778.729m
Sheet No: 1 of 1

Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

Resistivity Cone Penetration Test Plots


CONETEC

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 09:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT100
Cone: 750:T1500F15U35 Area= 15cm2

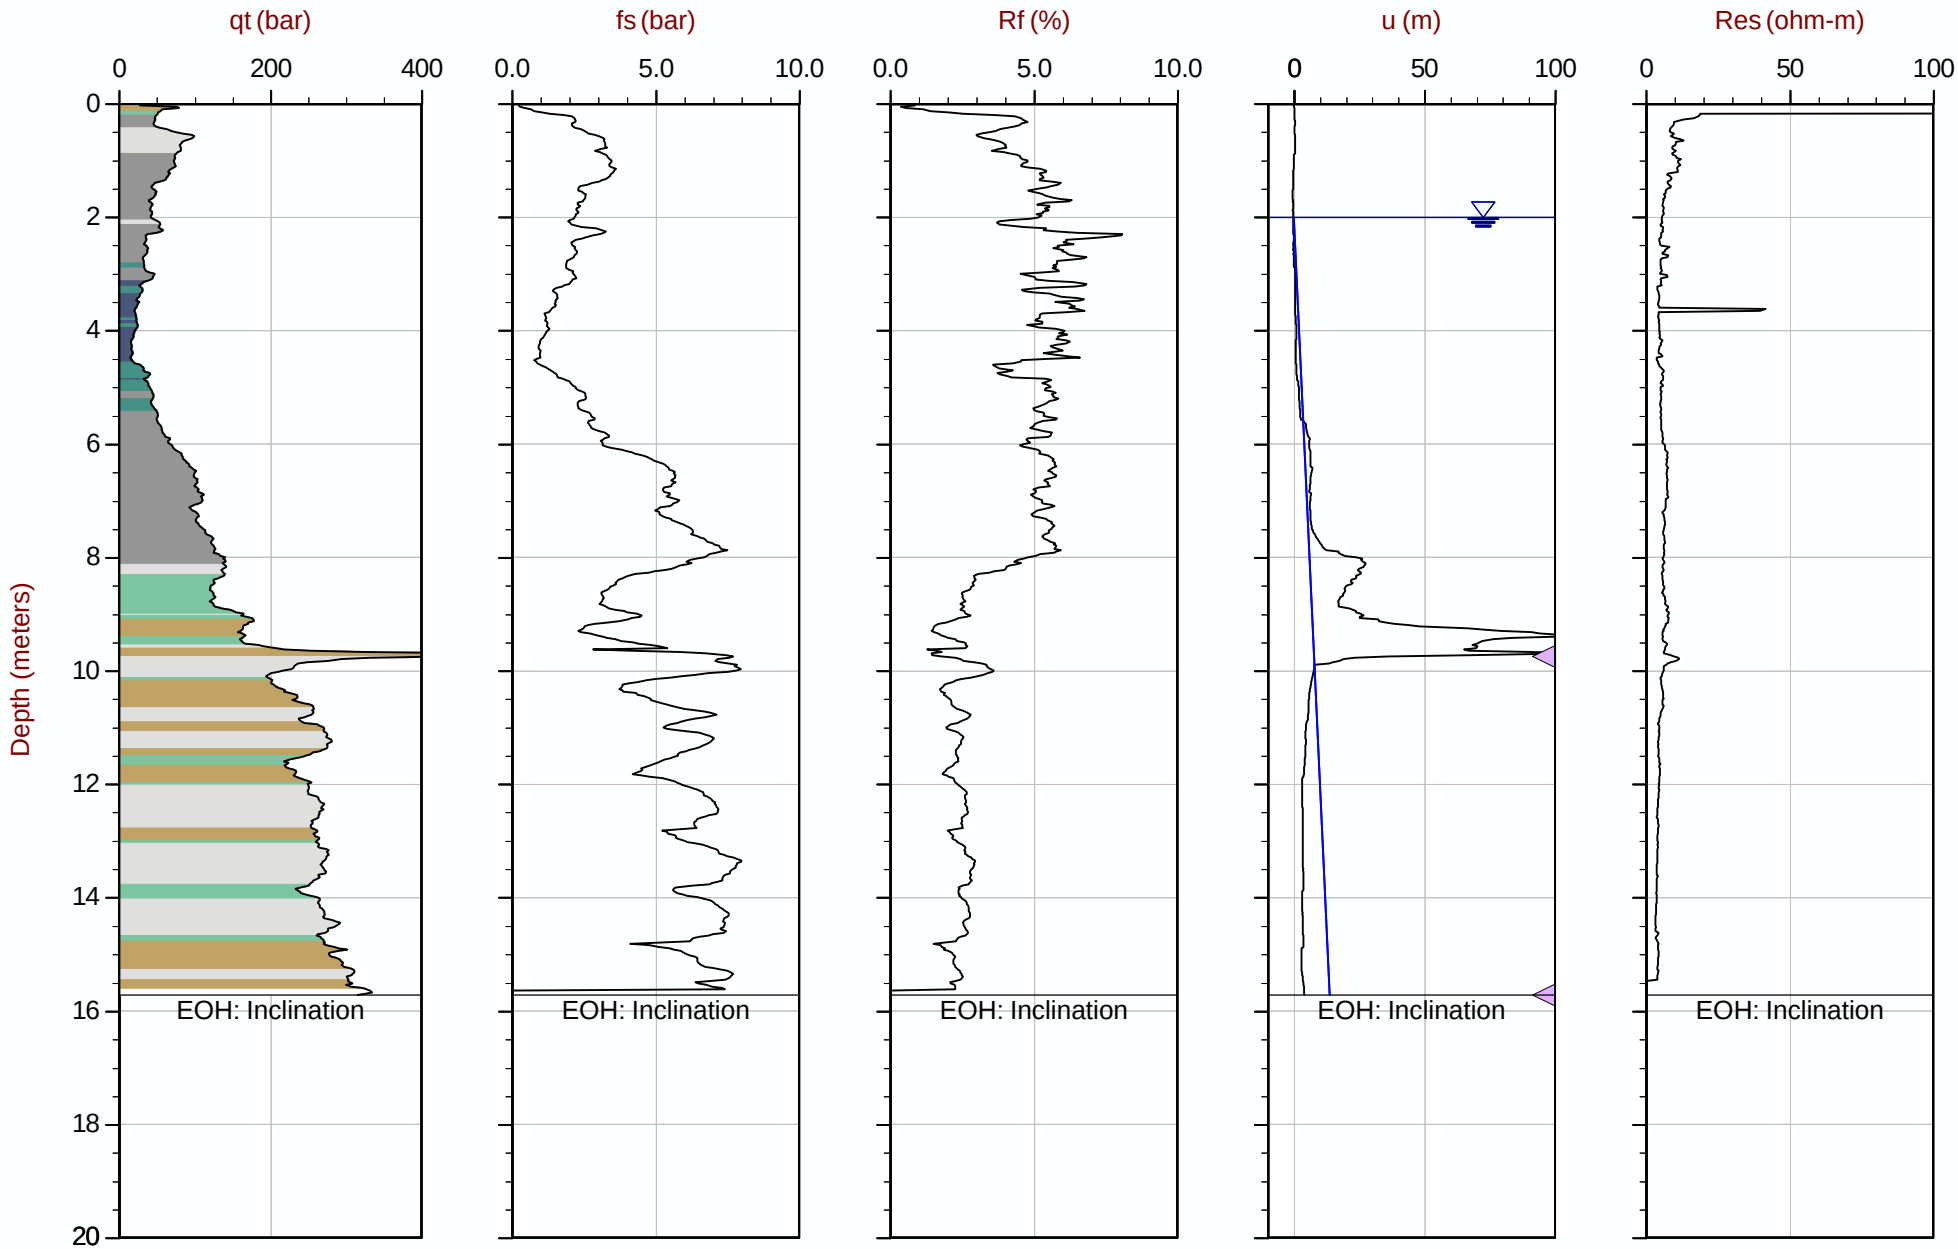

Max Depth: 15.725 m / 51.59 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT100.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612602m E: 413774m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 11:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT101
Cone: 750:T1500F15U35 Area= 15cm2

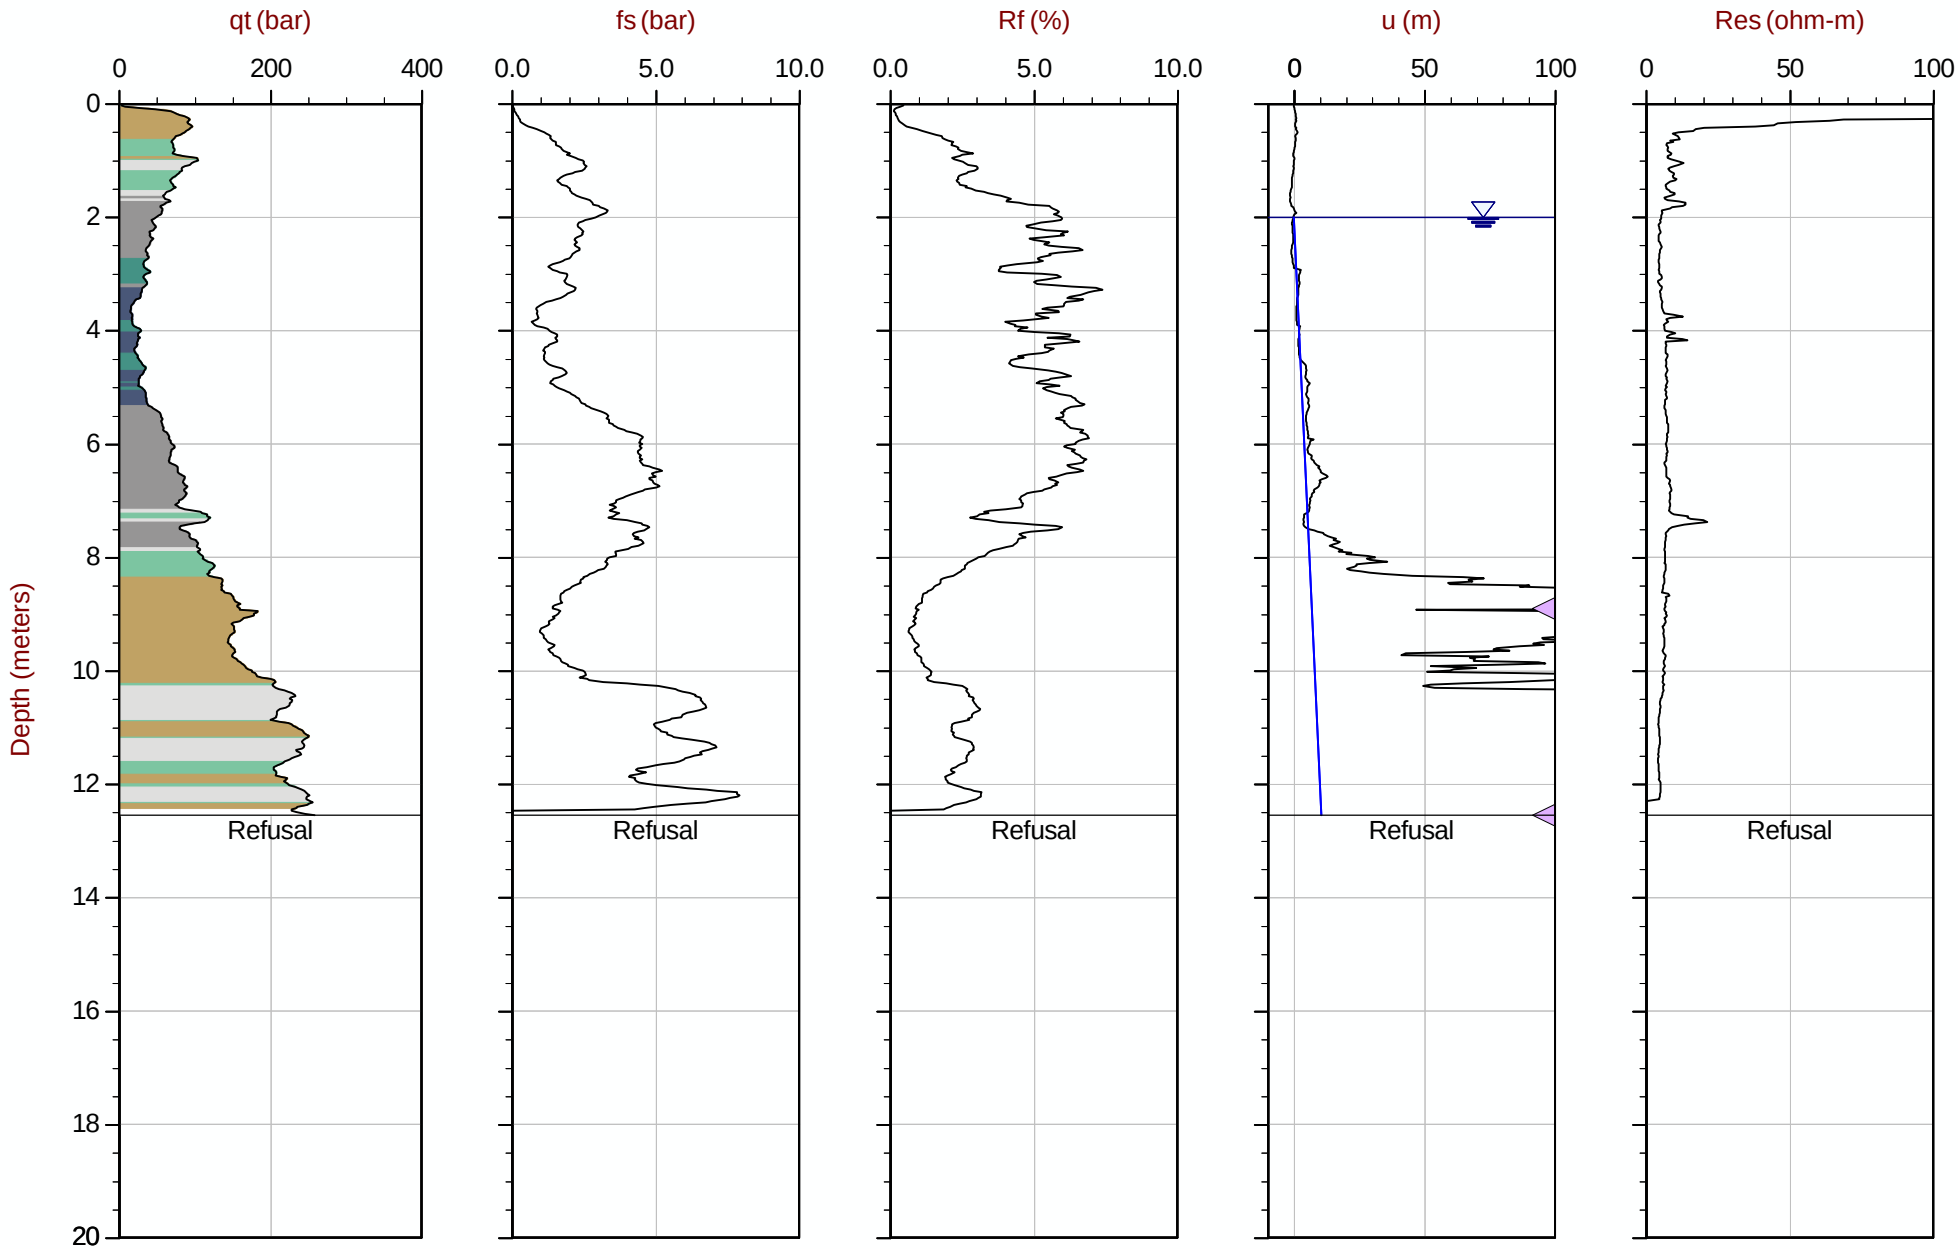

Max Depth: 12.550 m / 41.17 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT101.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612601m E: 413873m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 13:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT102
Cone: 651:T1500F15U35 Area= 15cm2

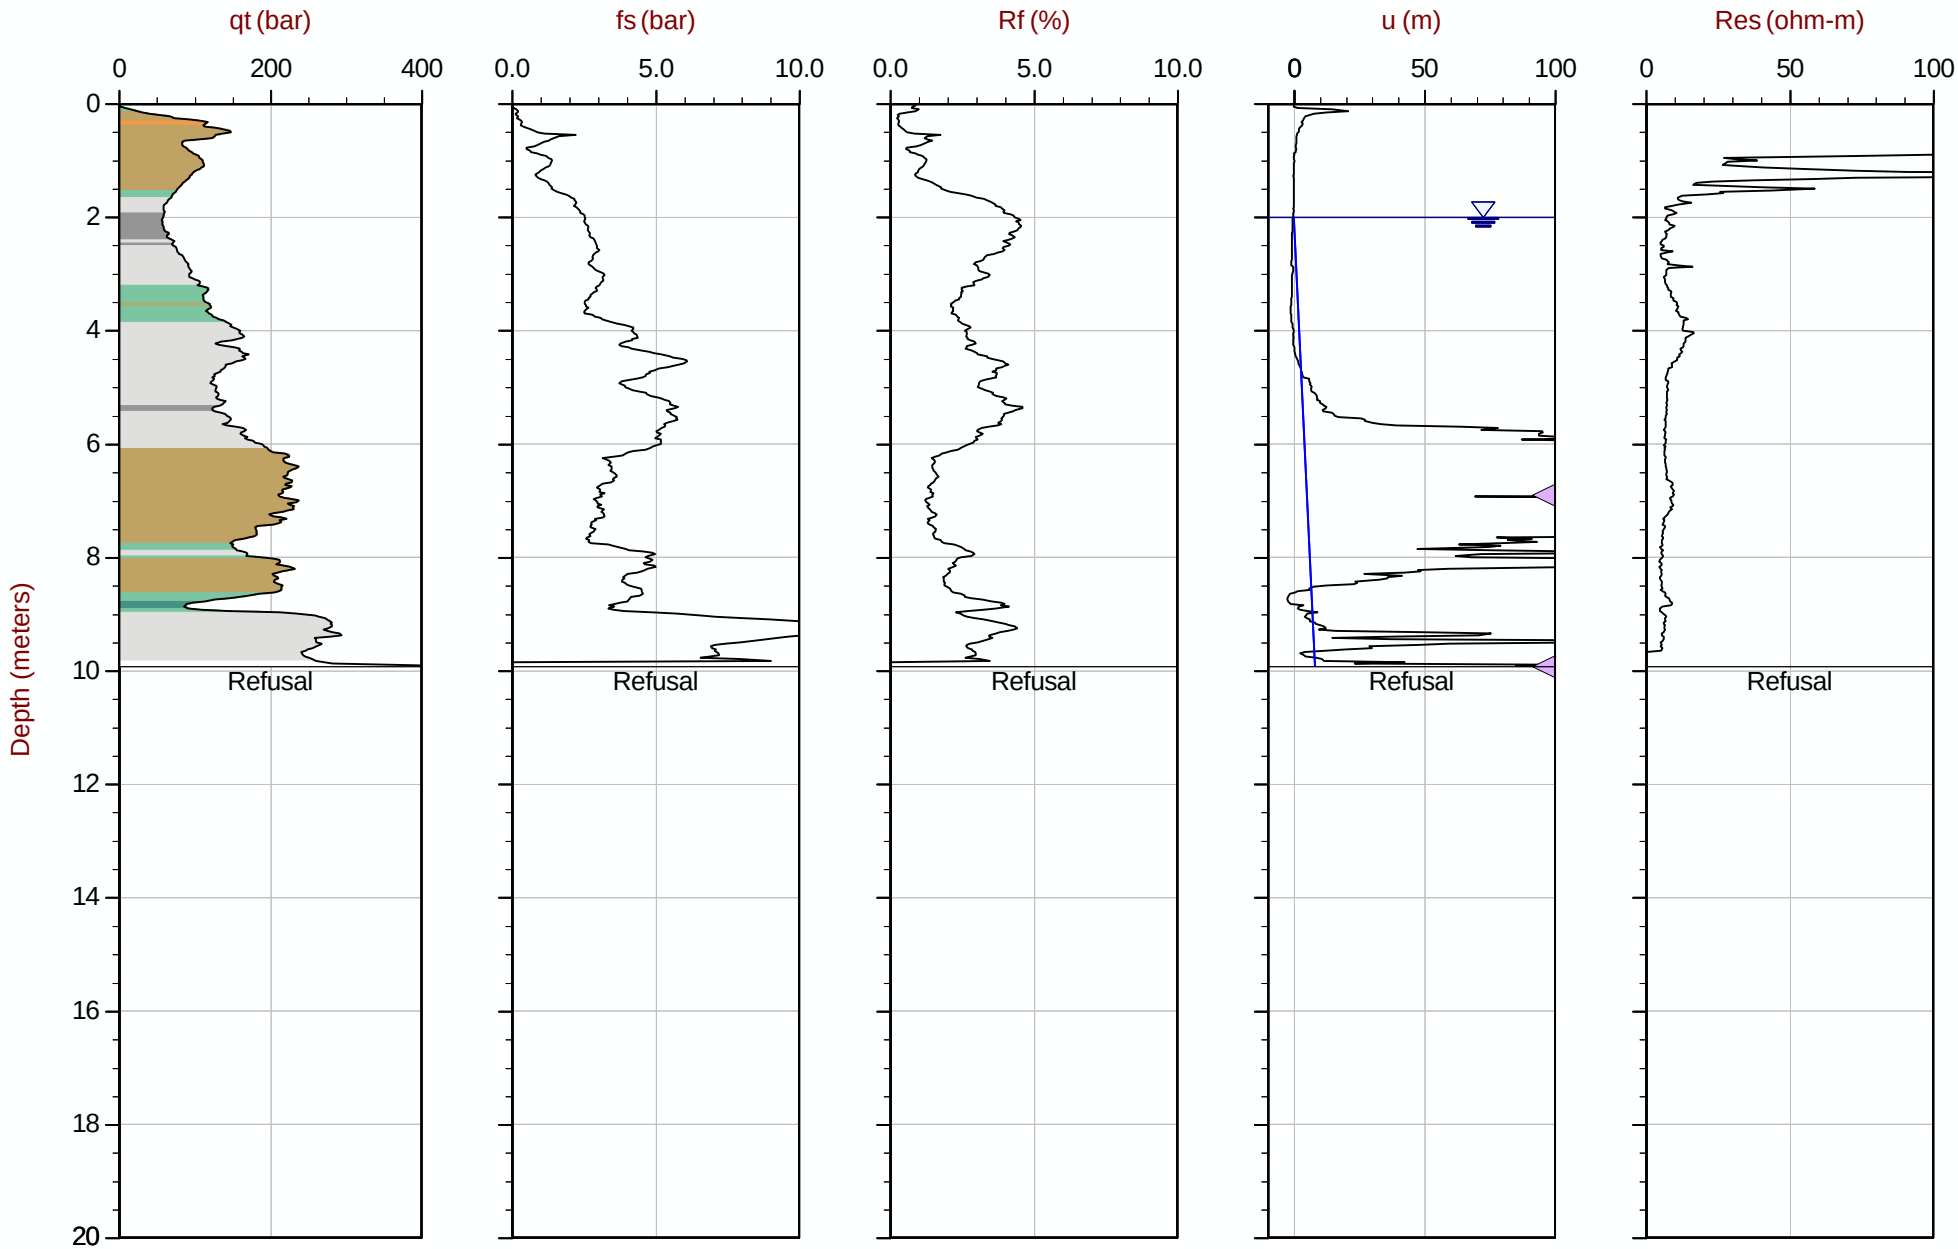

Max Depth: 9.925 m / 32.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT102.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612599m E: 413972m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 15:27
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT103
Cone: 651:T1500F15U35 Area= 15cm2

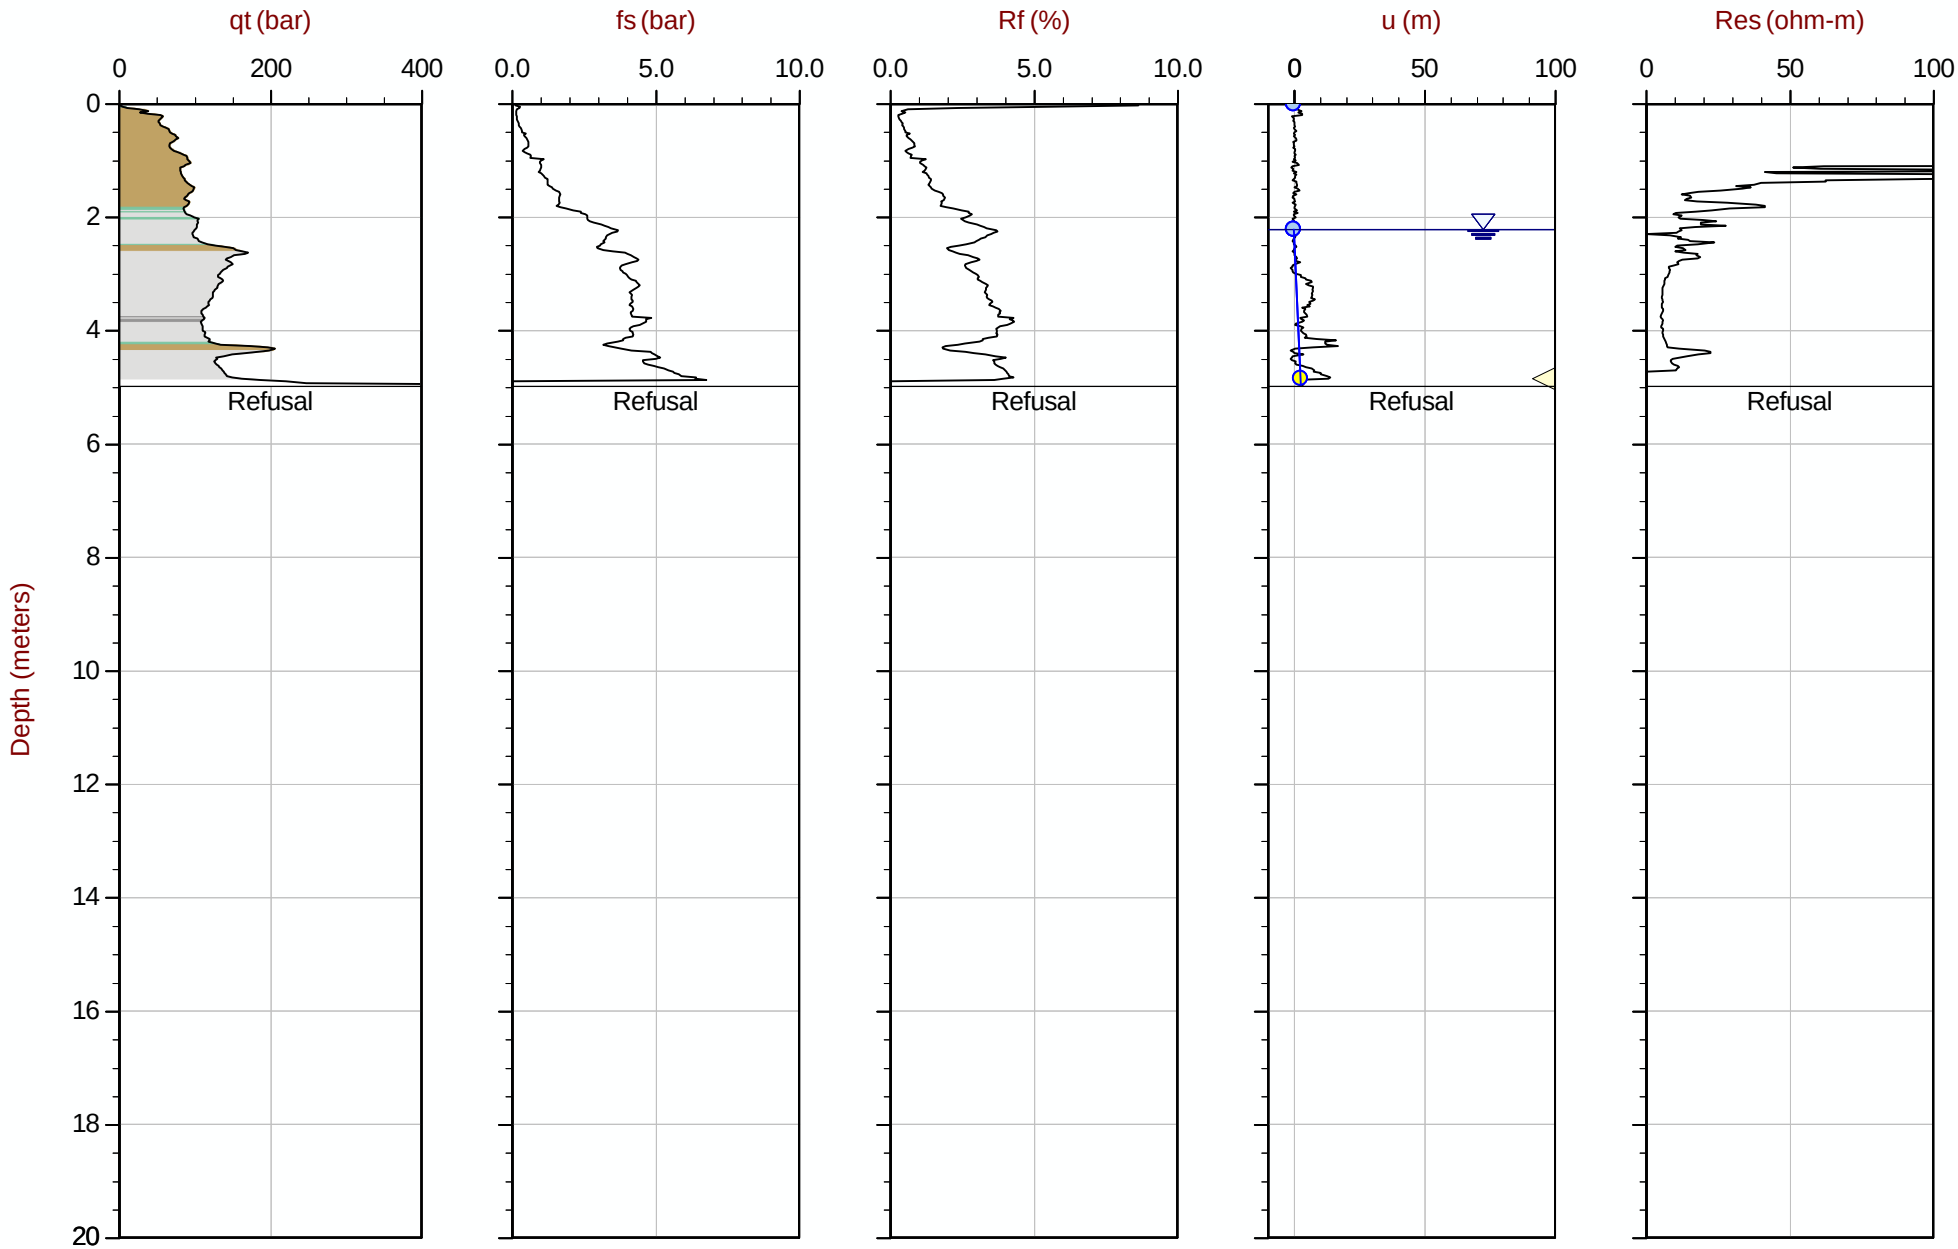

Max Depth: 4.975 m / 16.32 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT103.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612598m E: 414069m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 16:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT104
Cone: 651:T1500F15U35 Area= 15cm2

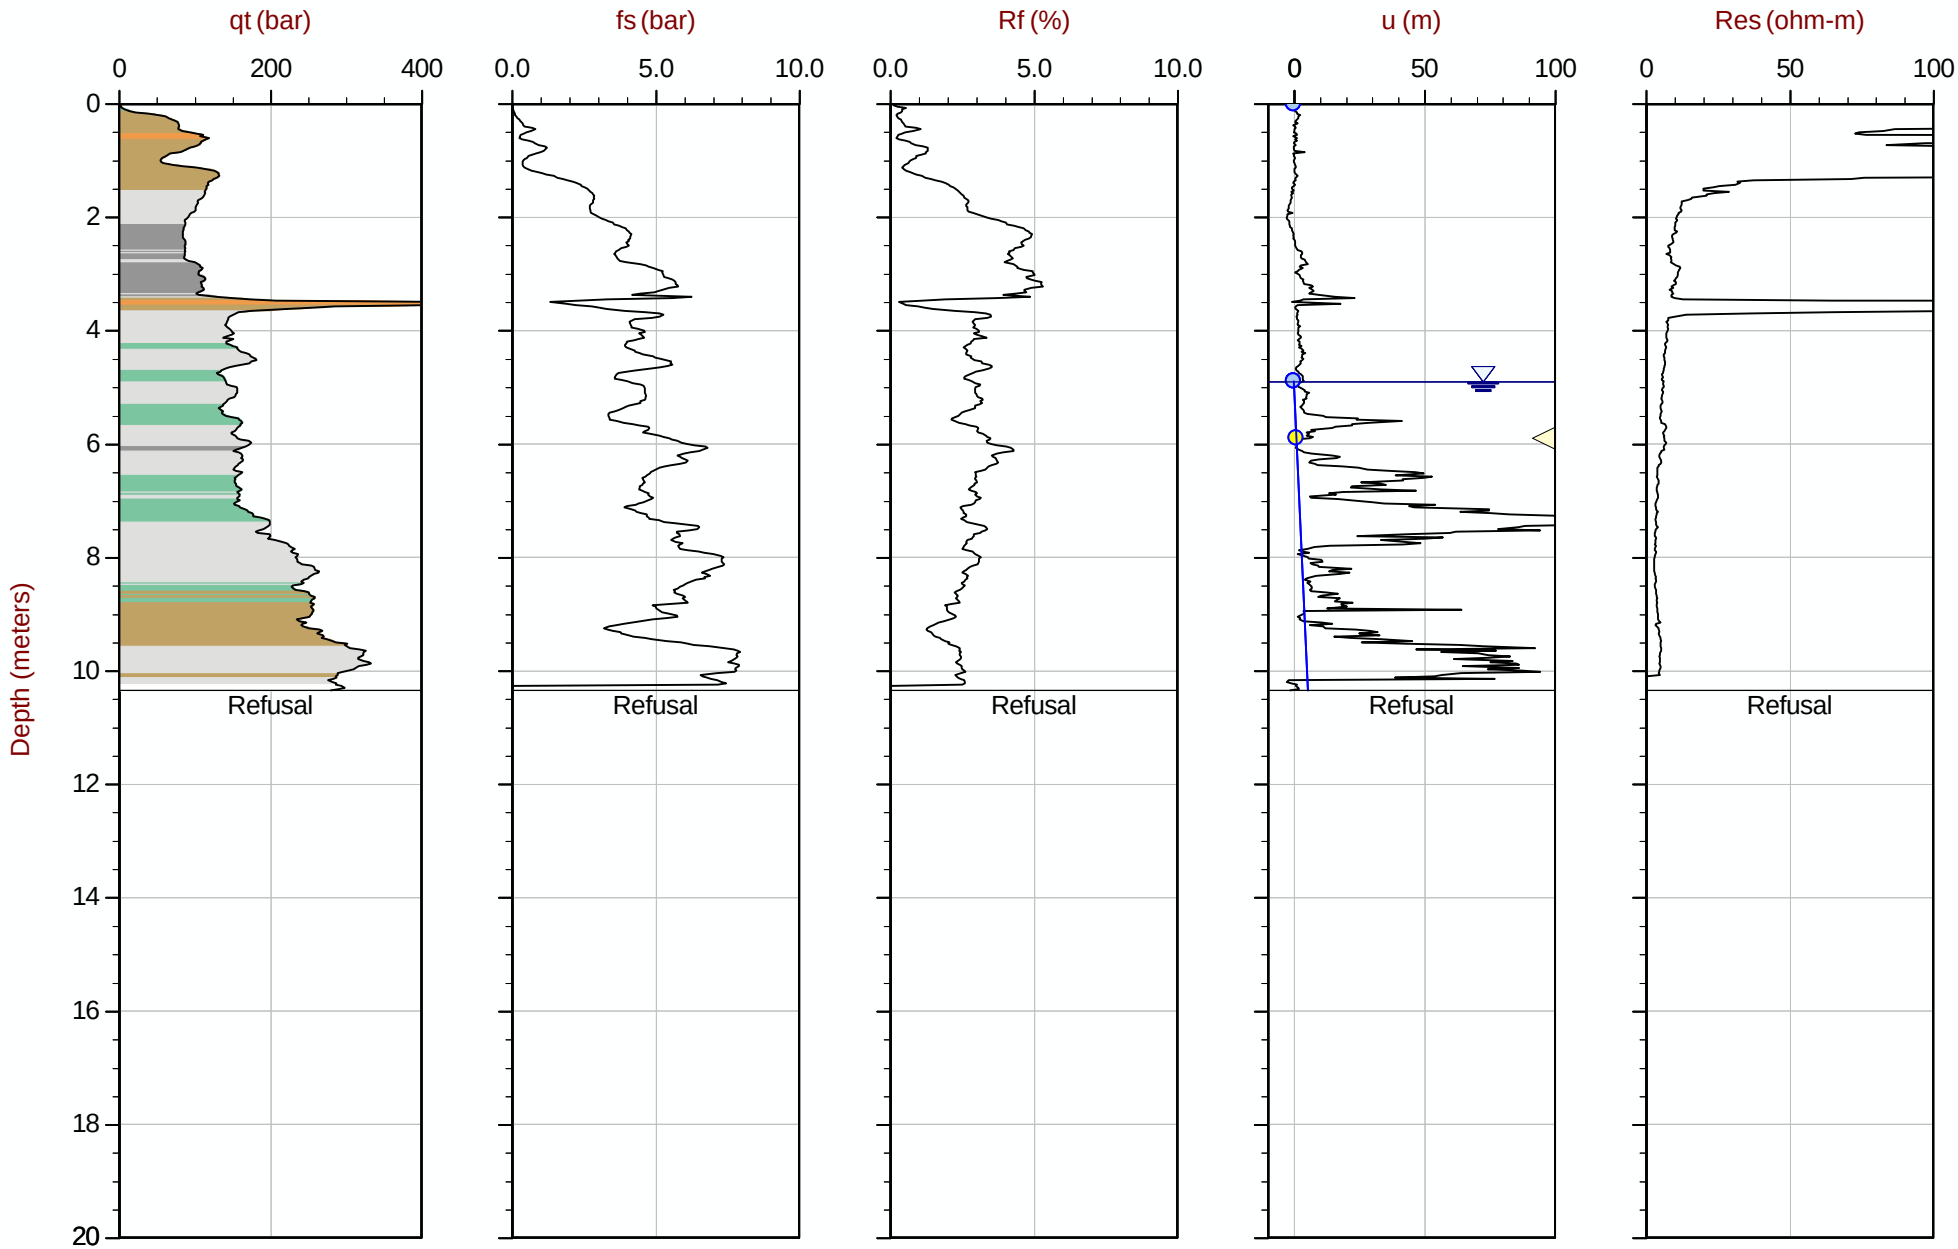

Max Depth: 10.350 m / 33.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT104.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 414171m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT105
Cone: 651:T1500F15U35 Area= 15cm2

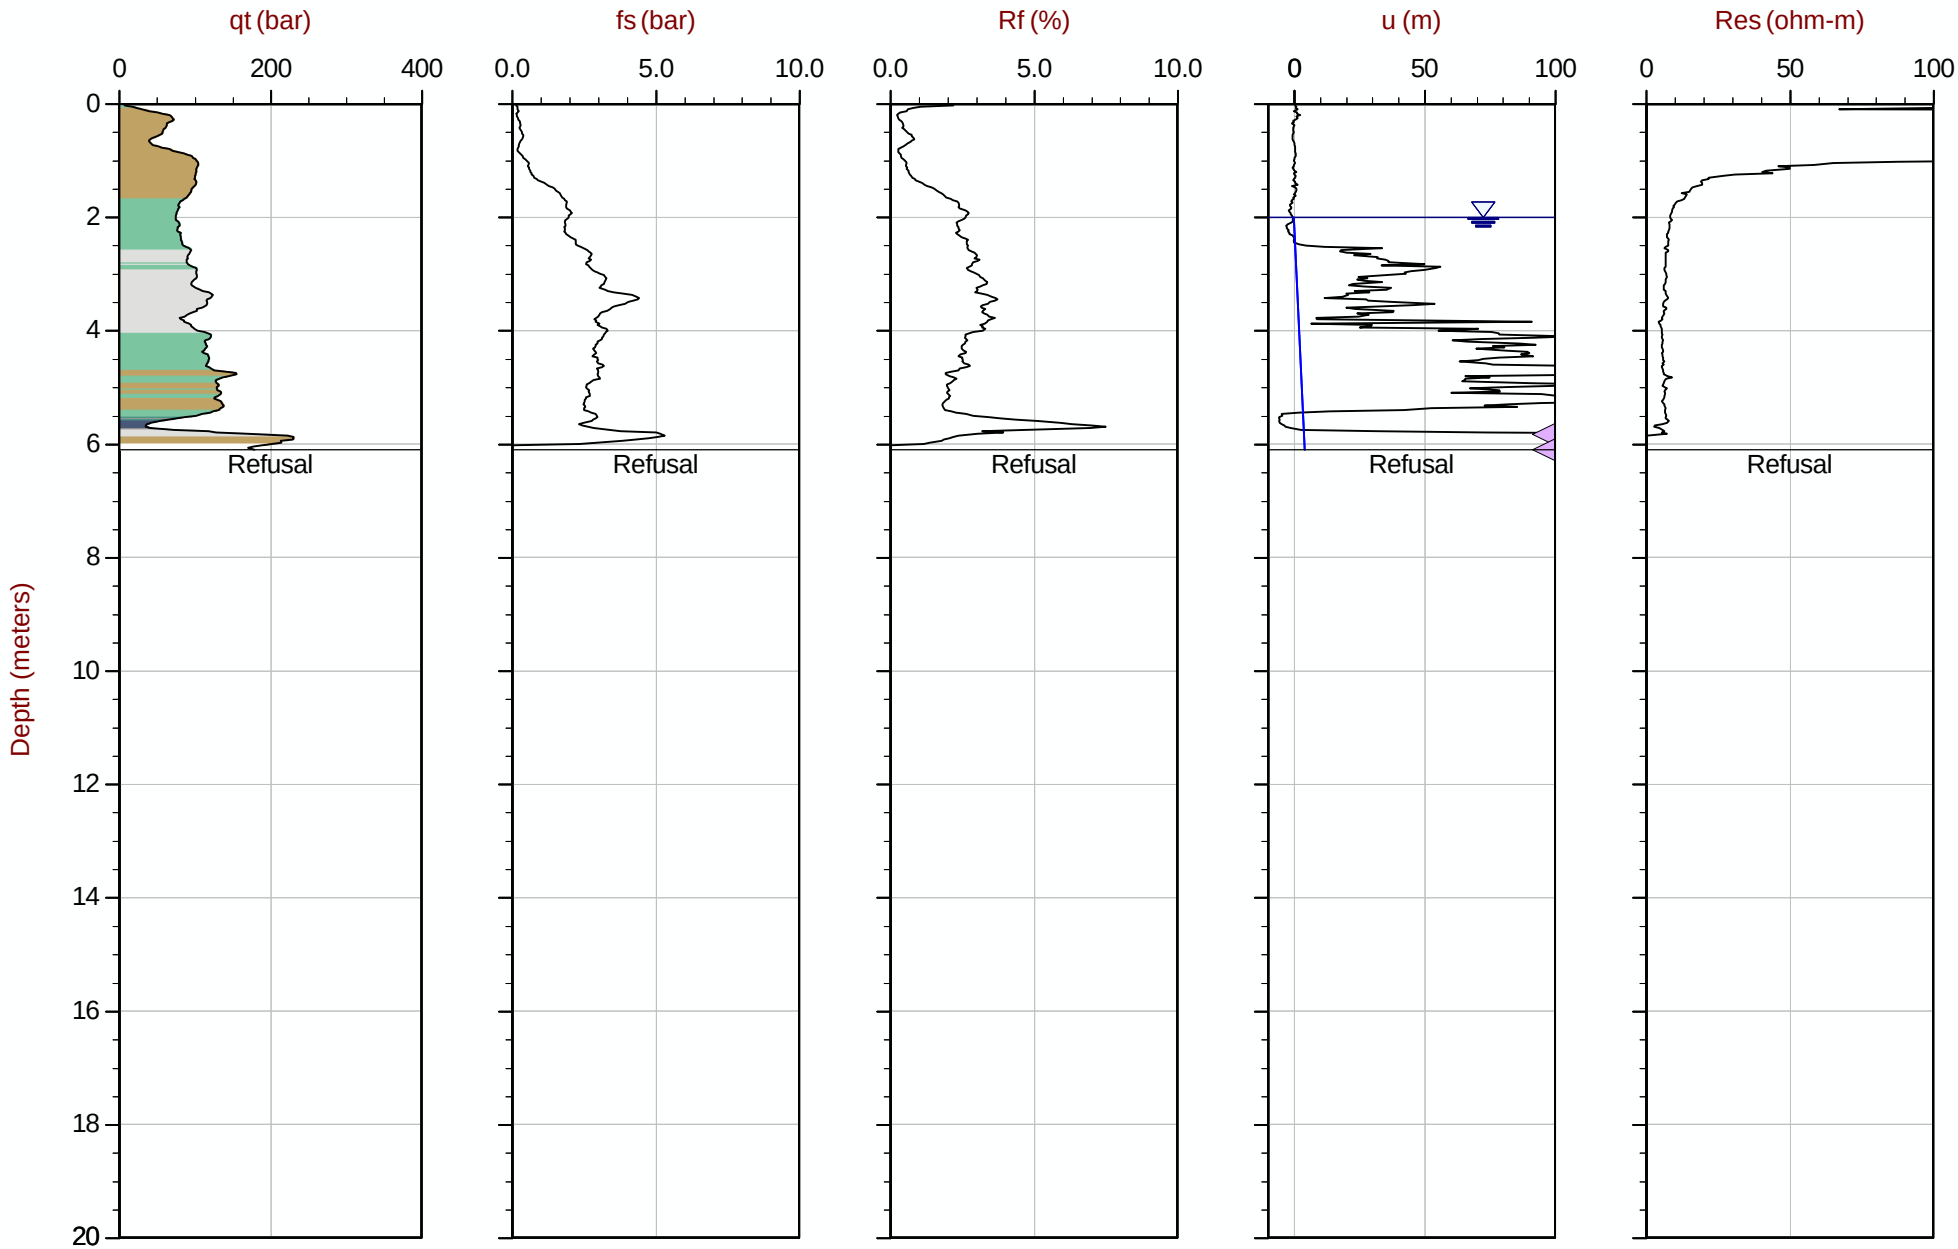

Max Depth: 6.100 m / 20.01 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT105.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612600m E: 414271m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 11:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT106
Cone: 651:T1500F15U35 Area= 15cm2

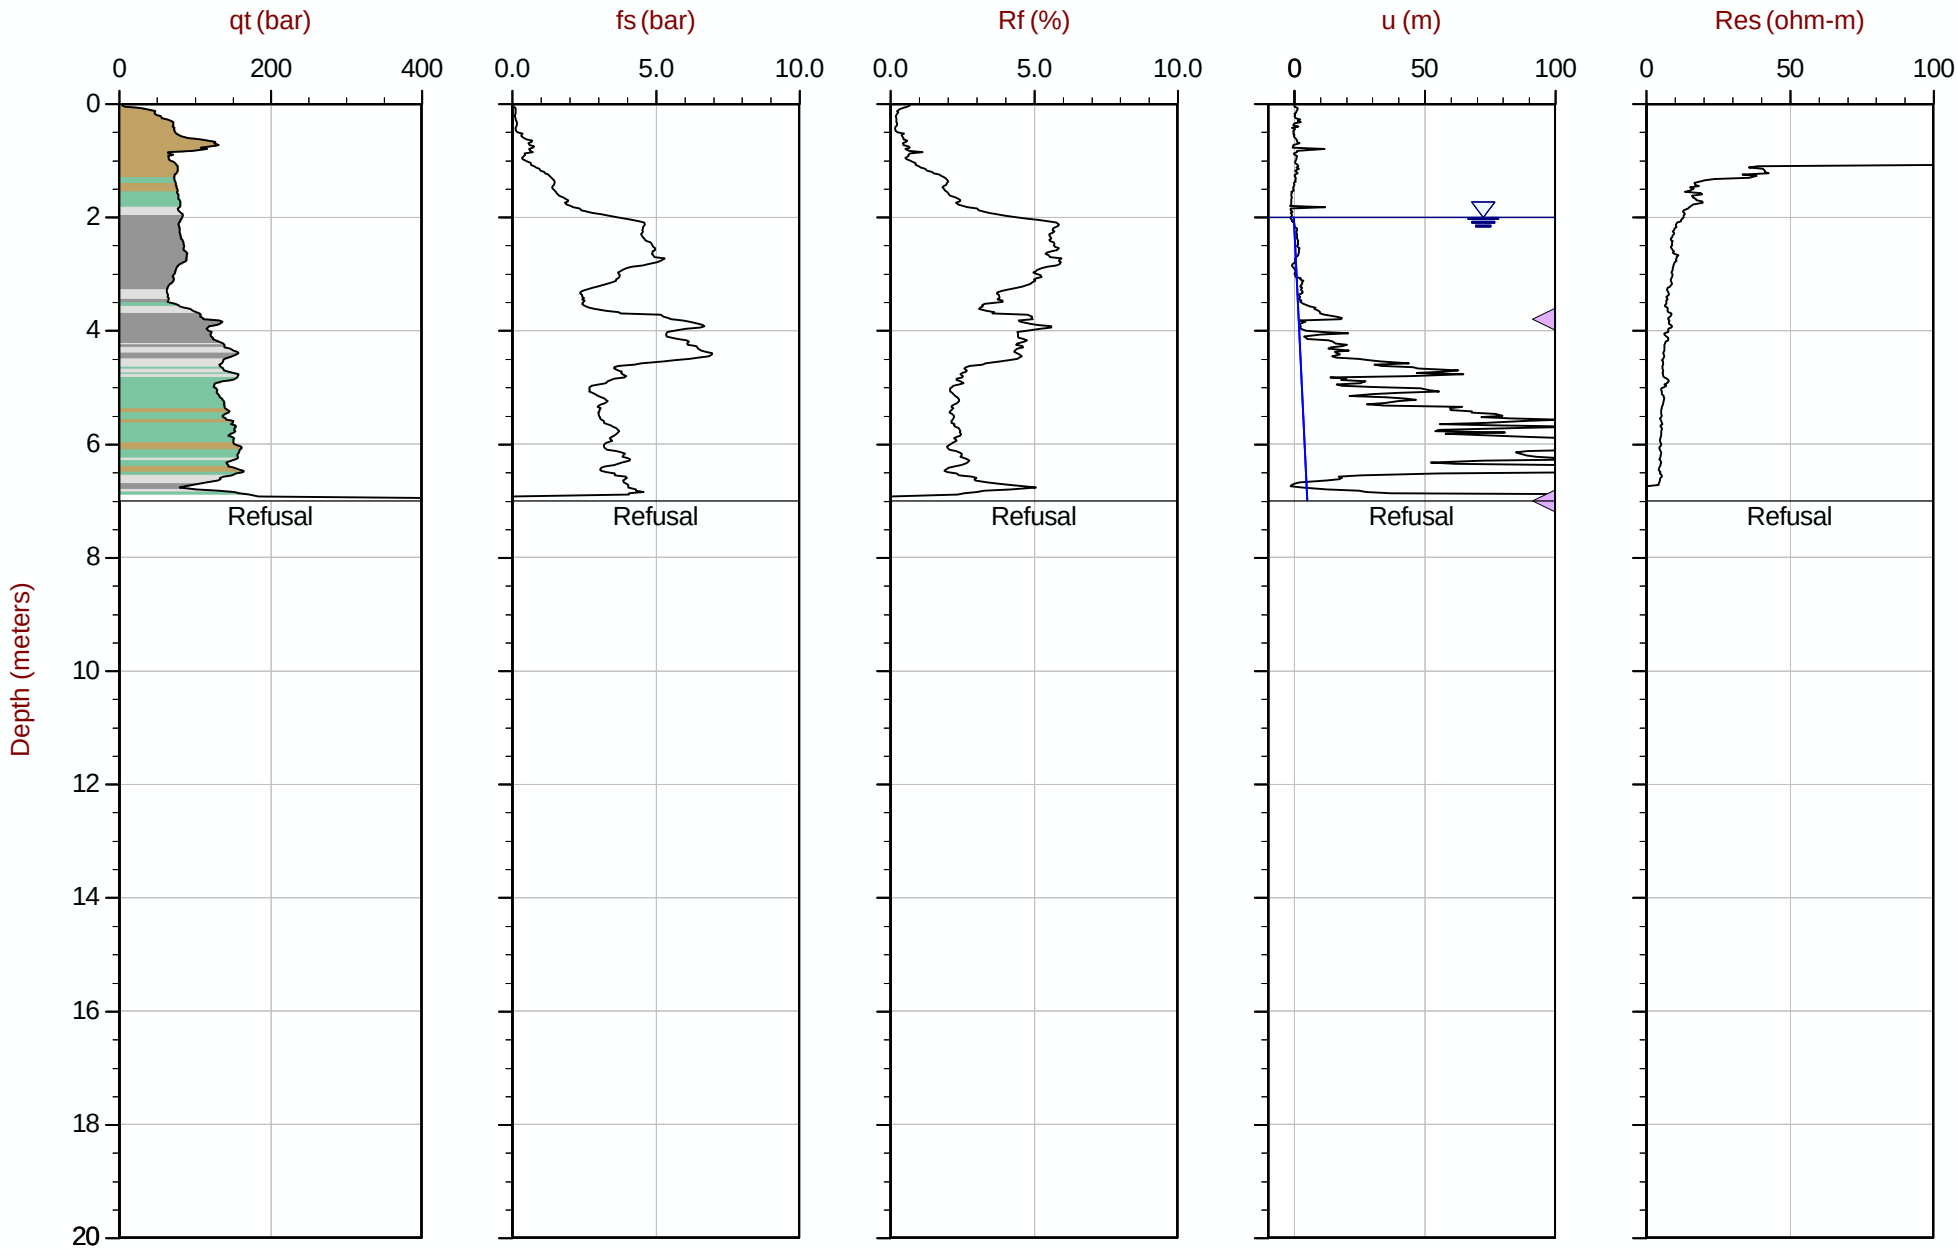

Max Depth: 7.000 m / 22.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT106.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612599m E: 414321m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 12:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT107
Cone: 651:T1500F15U35 Area= 15cm2

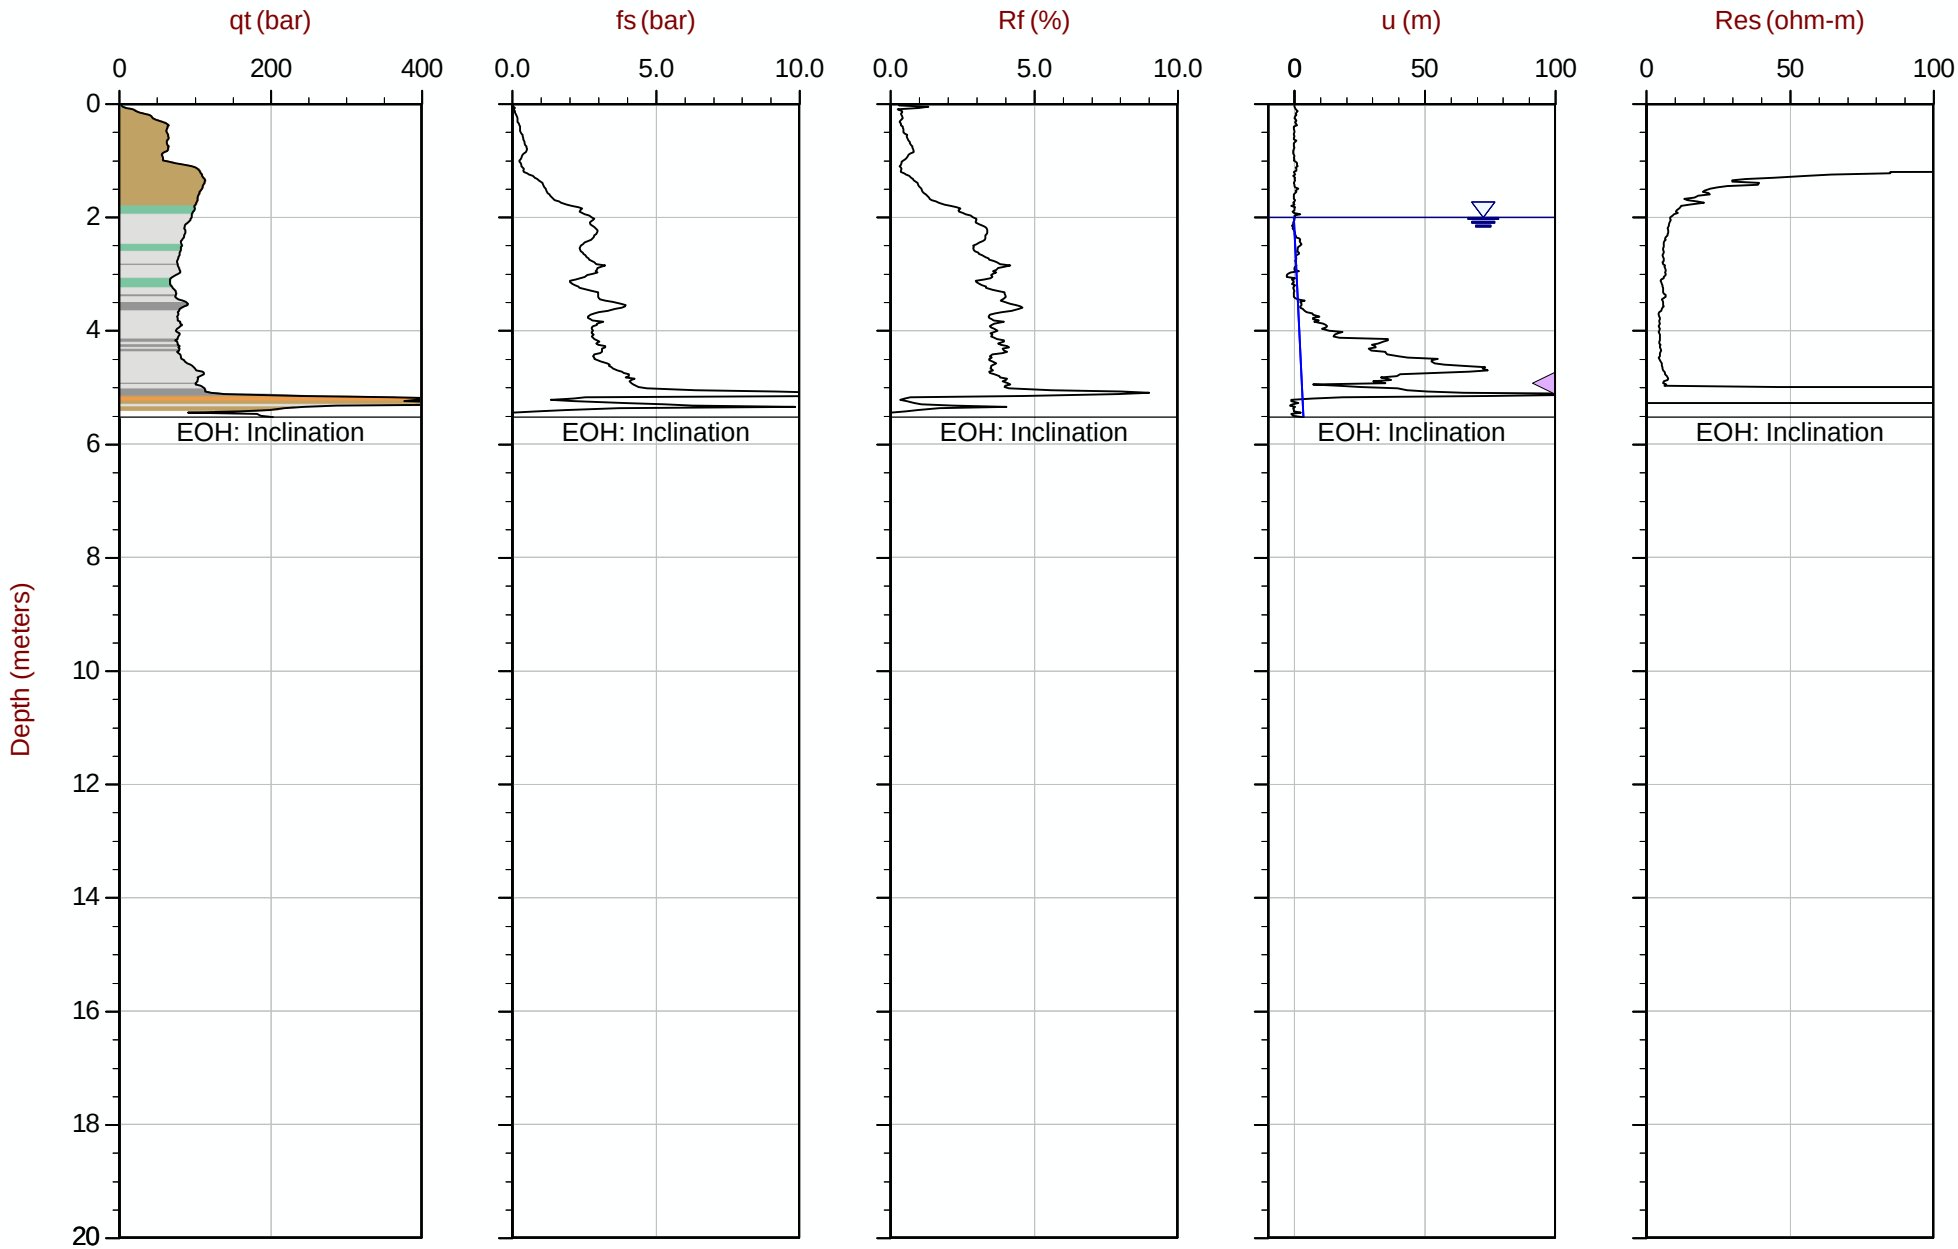

Max Depth: 5.525 m / 18.13 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT107.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612599m E: 414369m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 14:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT107A
Cone: 750:T1500F15U35 Area= 15cm2

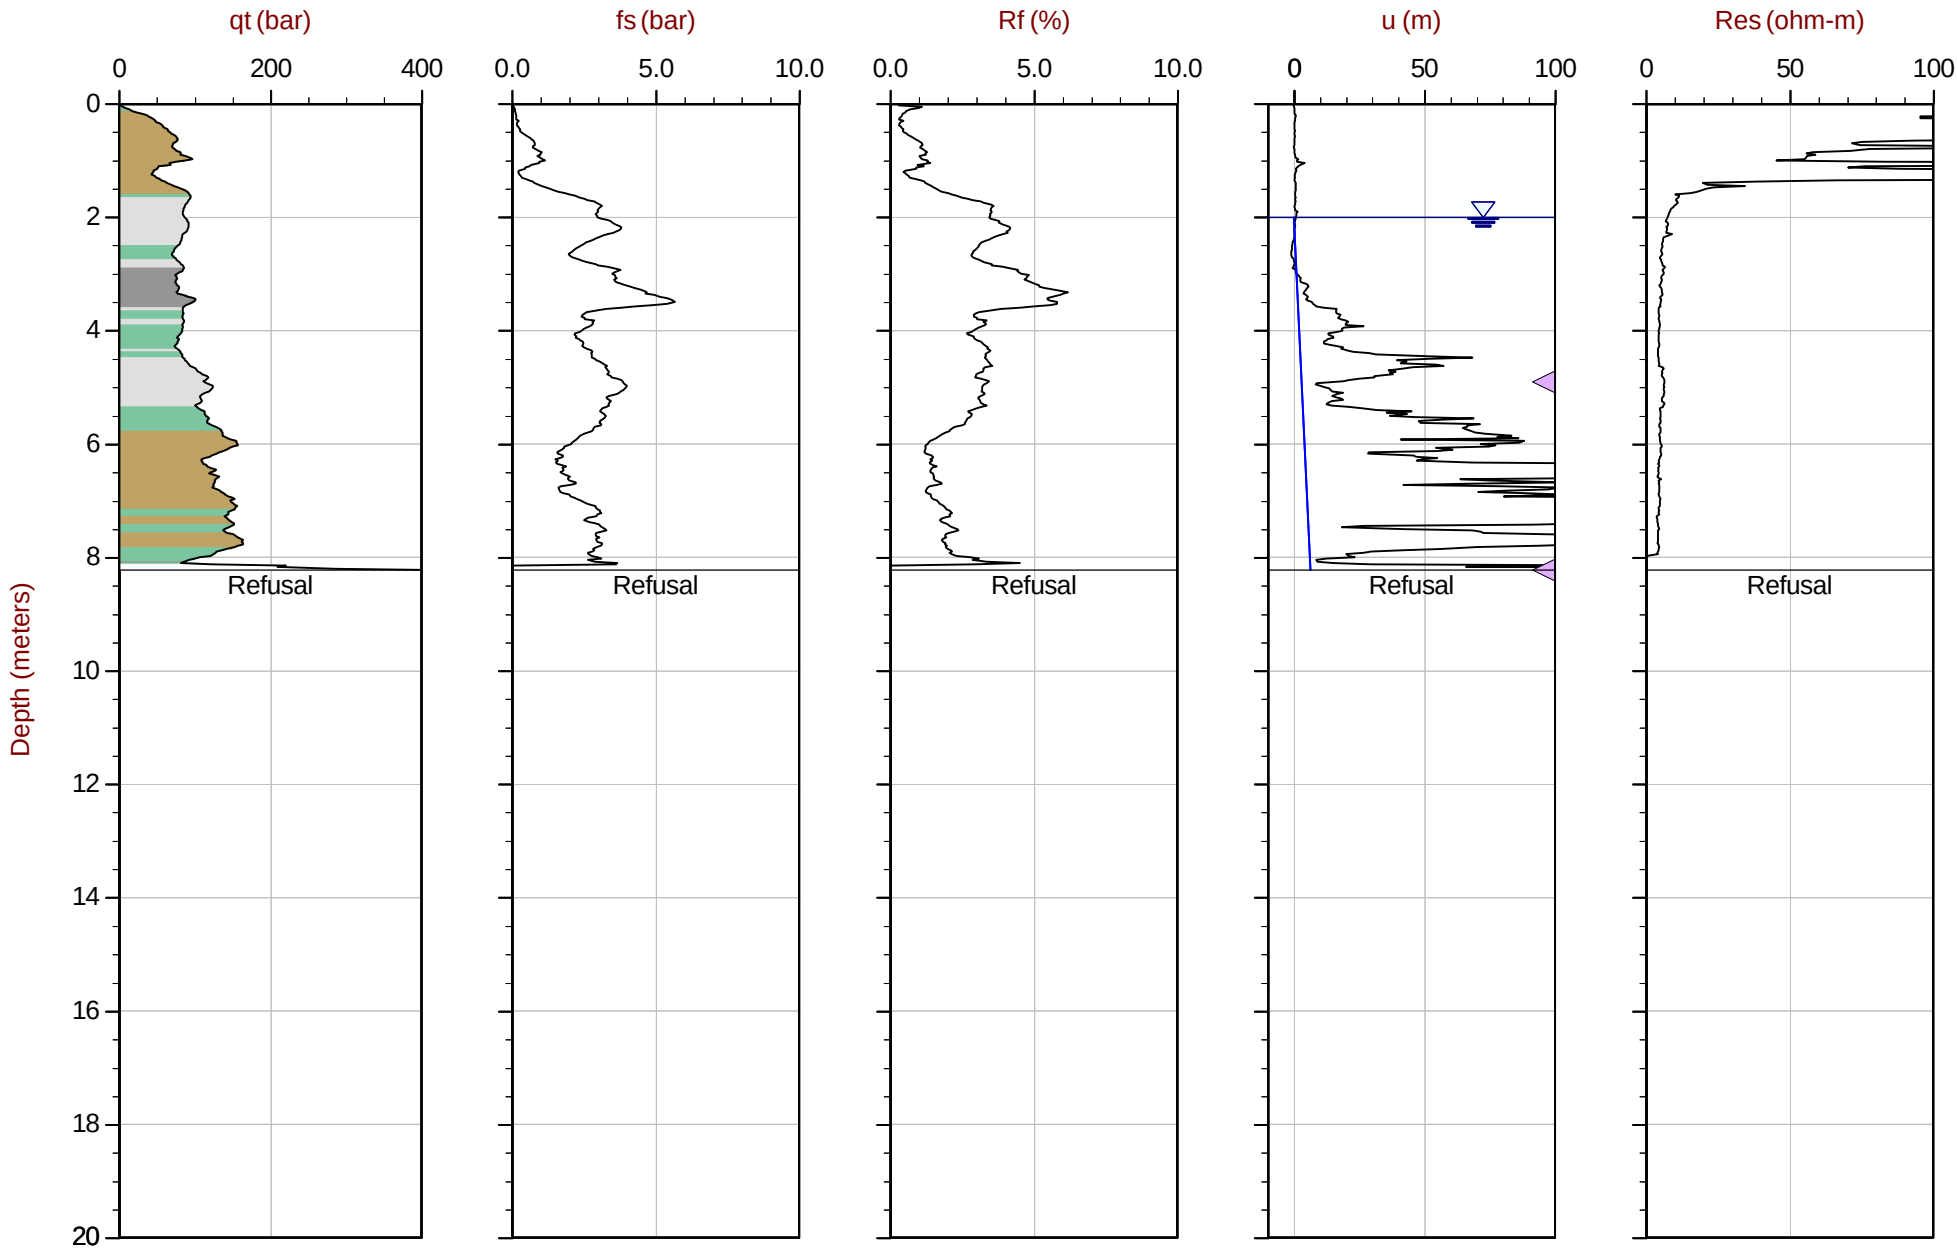

Max Depth: 8.225 m / 26.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT107A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612616m E: 414367m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 16:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT108
Cone: 750:T1500F15U35 Area= 15cm2

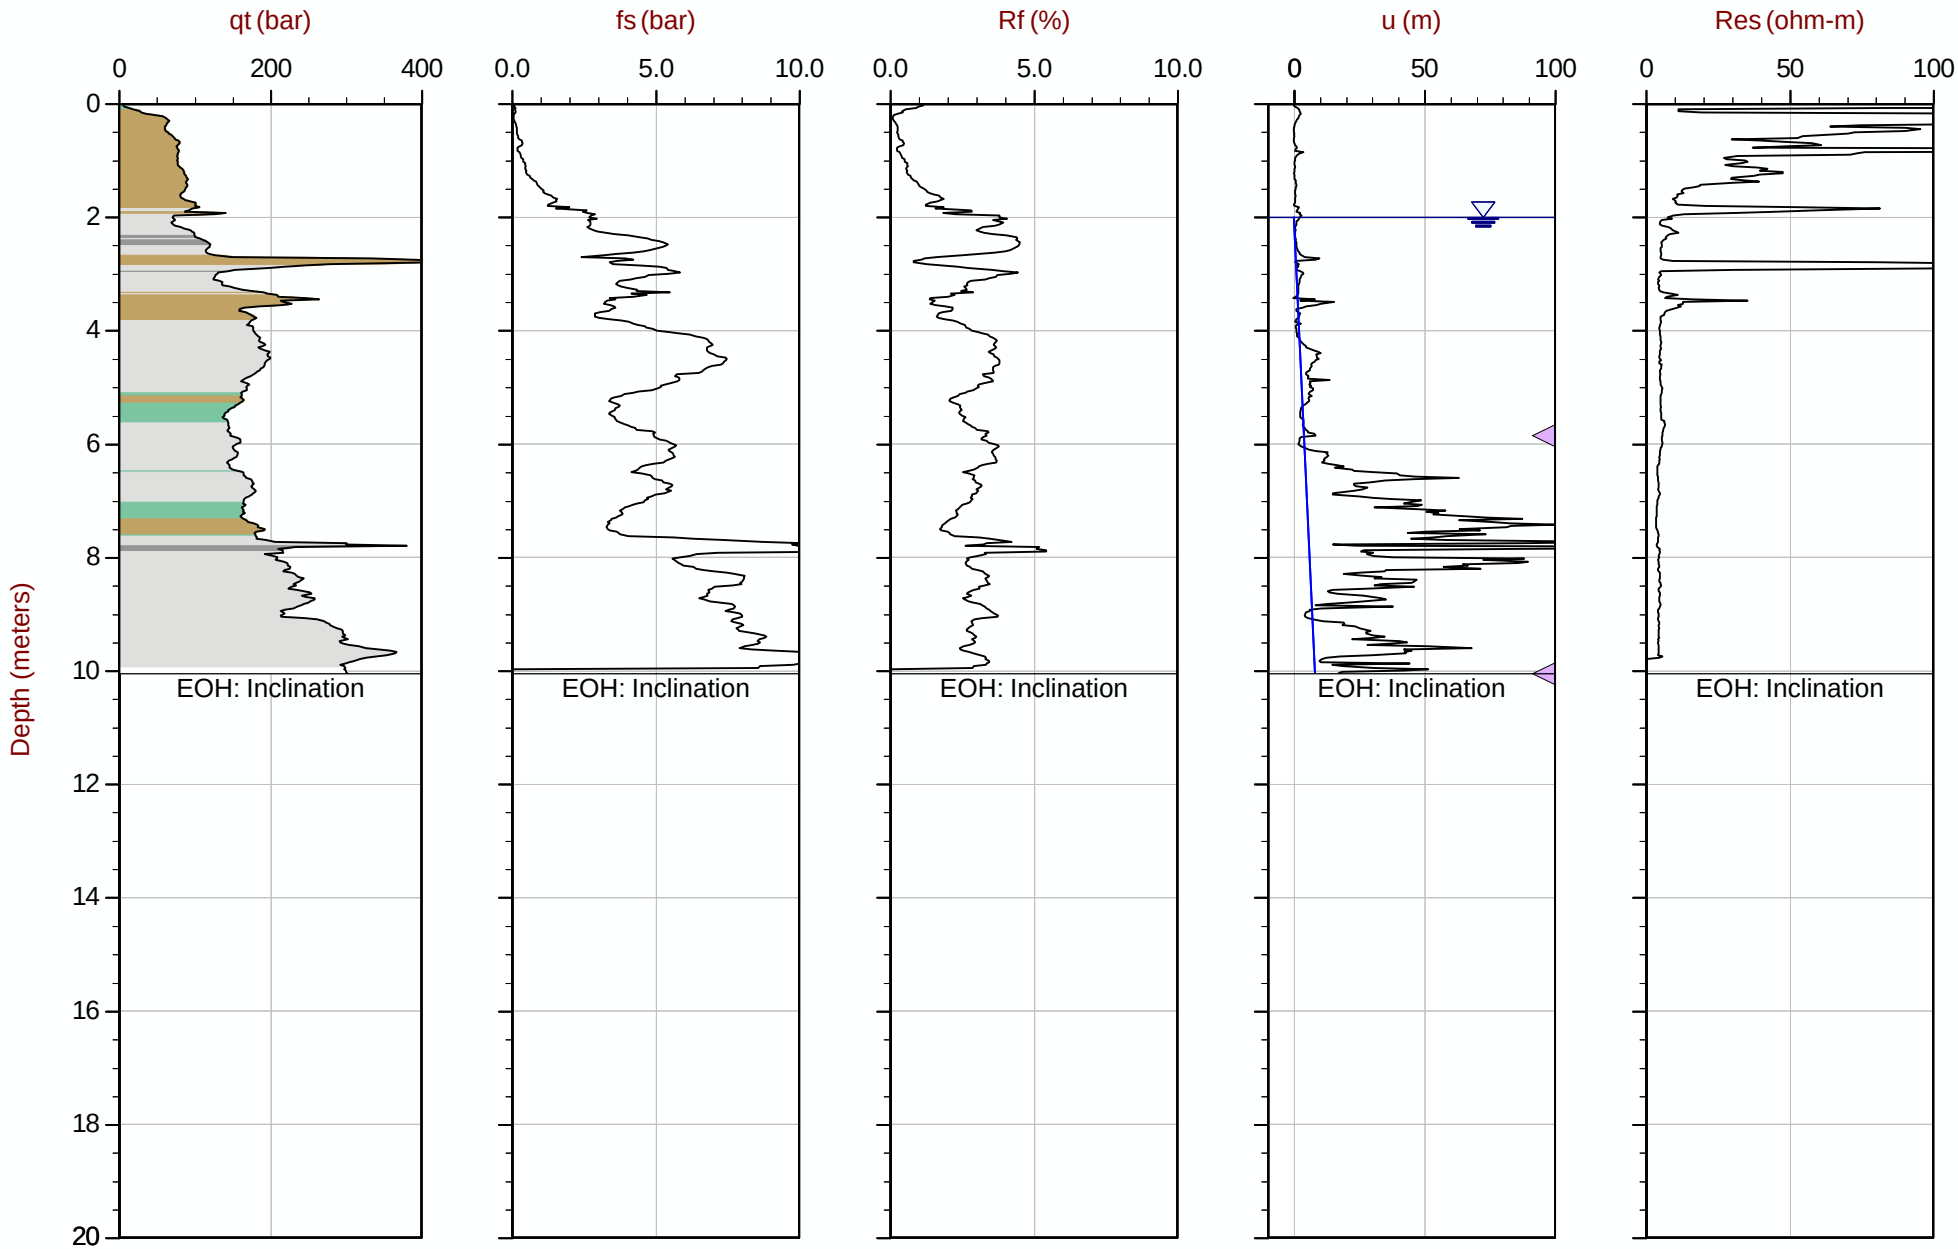

Max Depth: 10.050 m / 32.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT108.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 414520m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 08:46
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT109
Cone: 750:T1500F15U35 Area= 15cm2

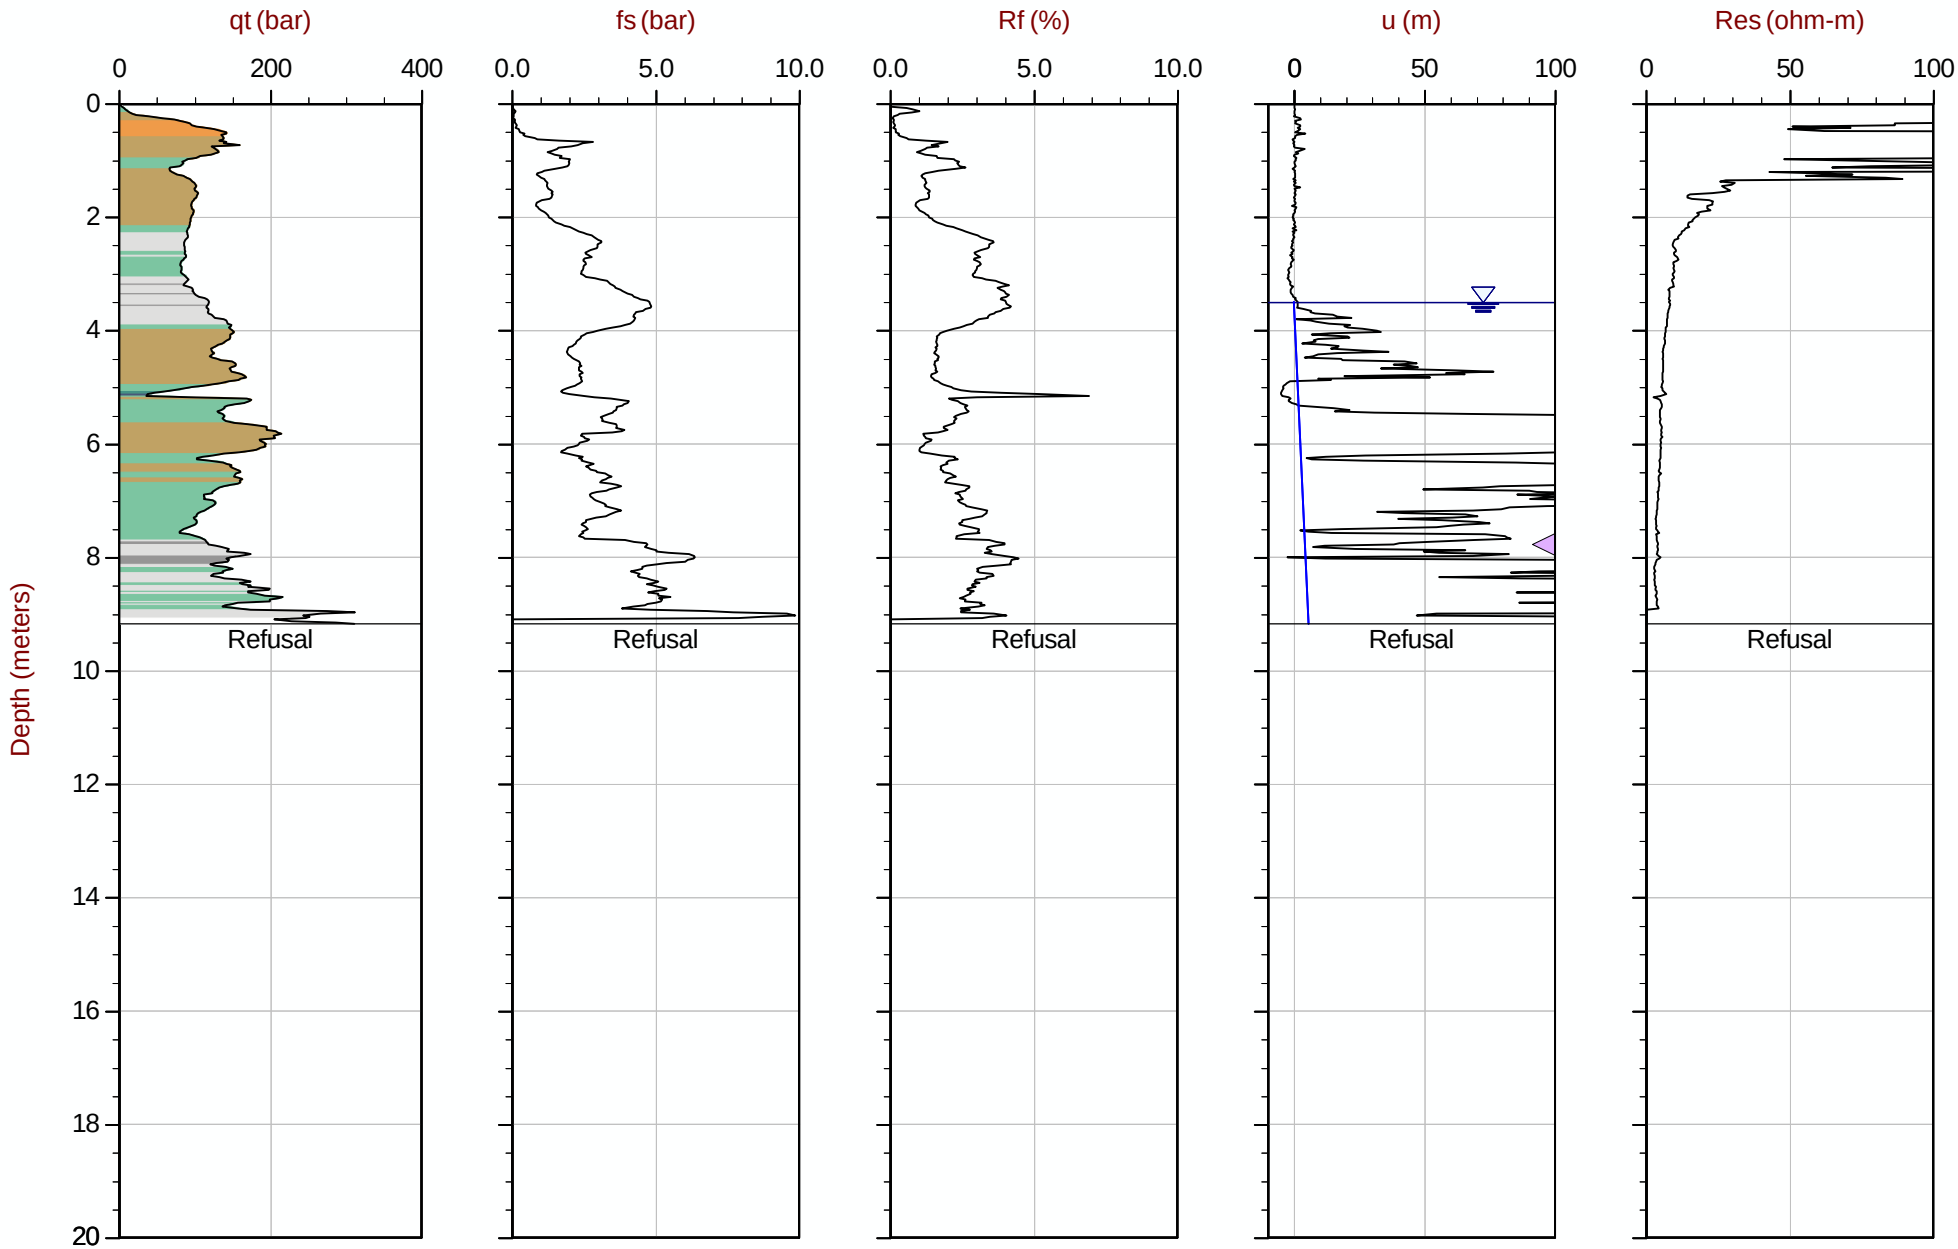

Max Depth: 9.175 m / 30.10 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT109.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 414569m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 16:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110
Cone: 750:T1500F15U35 Area= 15cm2

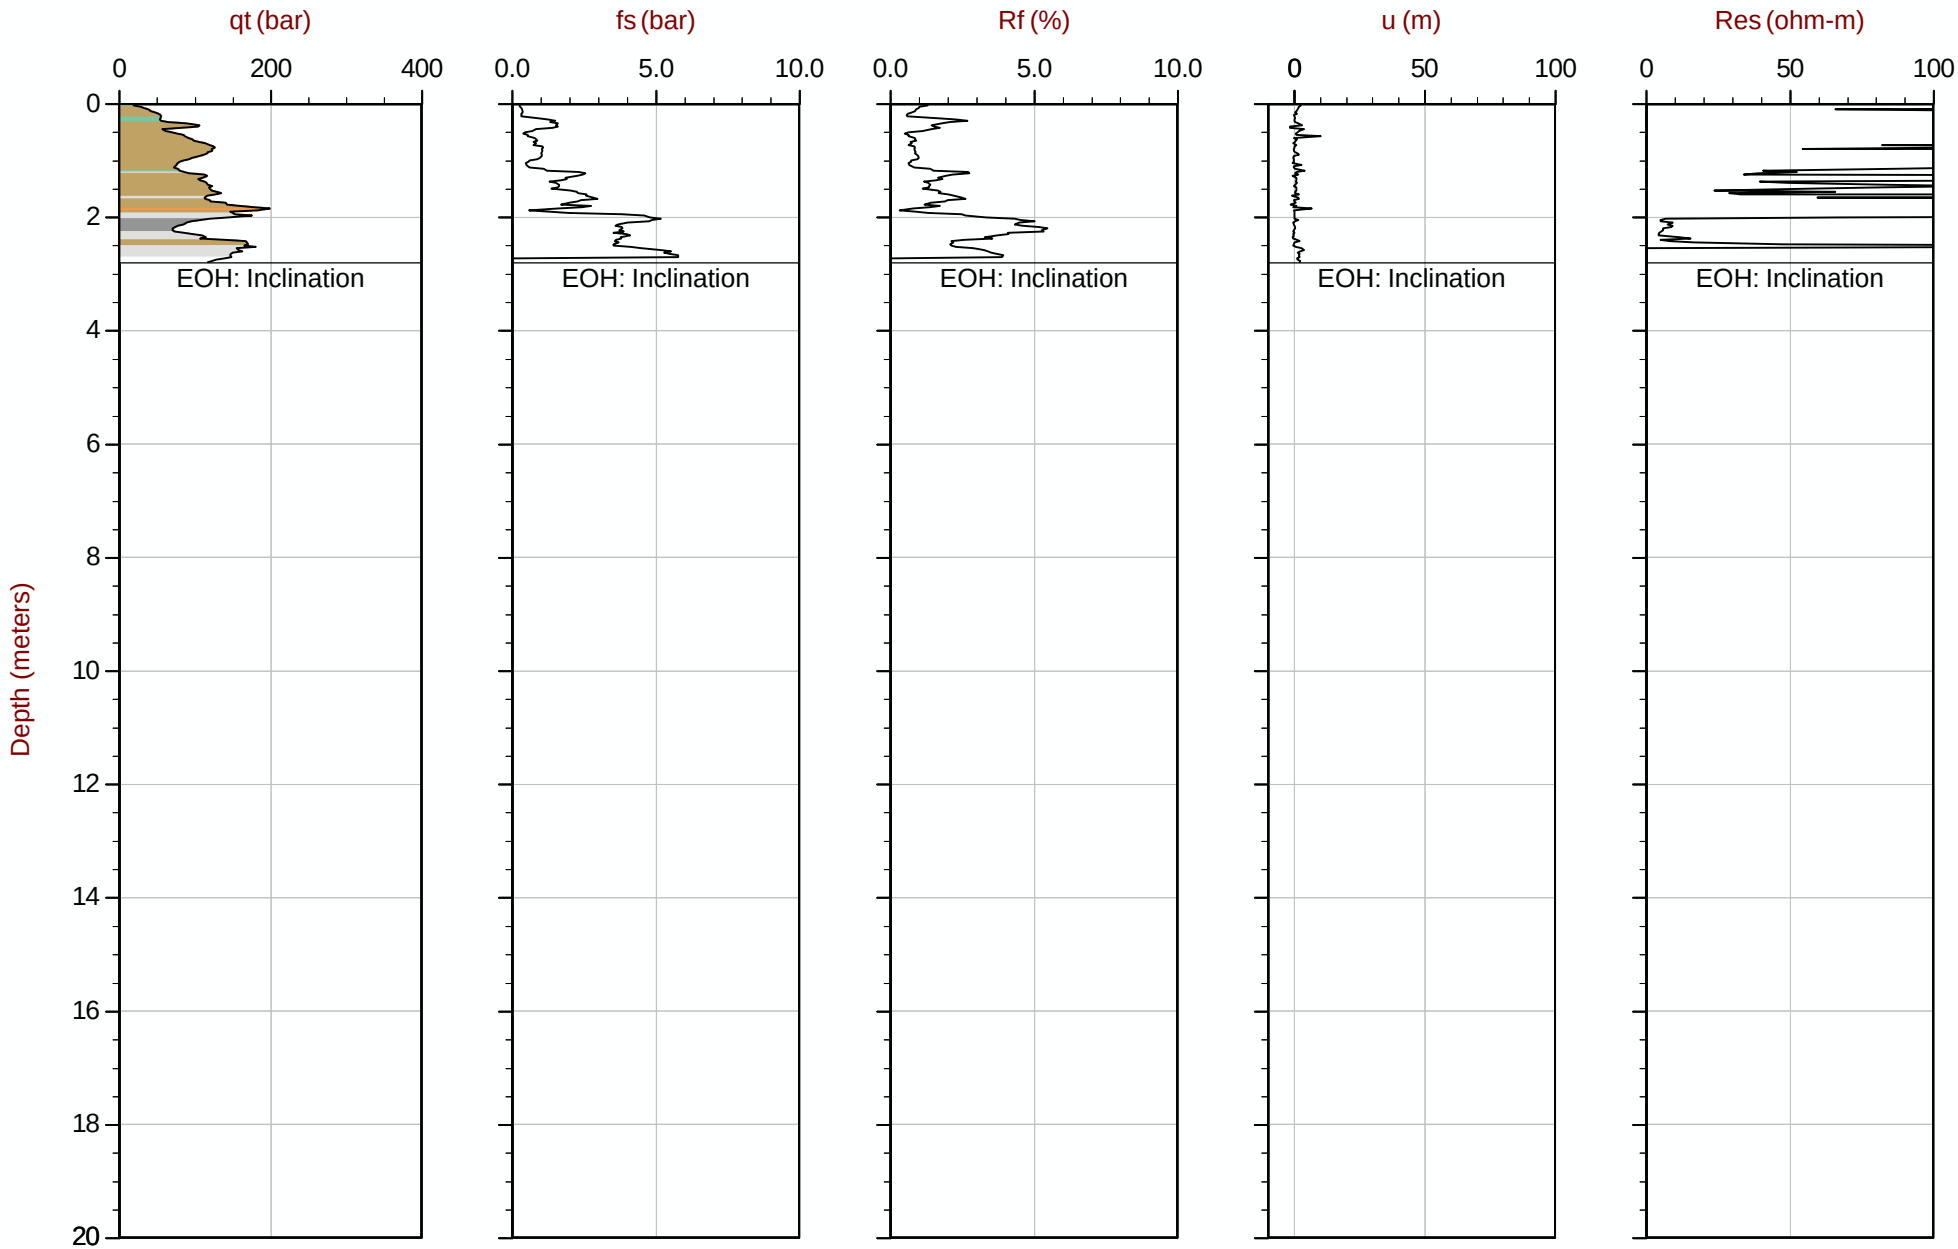

Max Depth: 2.800 m / 9.19 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT110.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612594m E: 414669m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 16:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110A
Cone: 750:T1500F15U35 Area= 15cm2

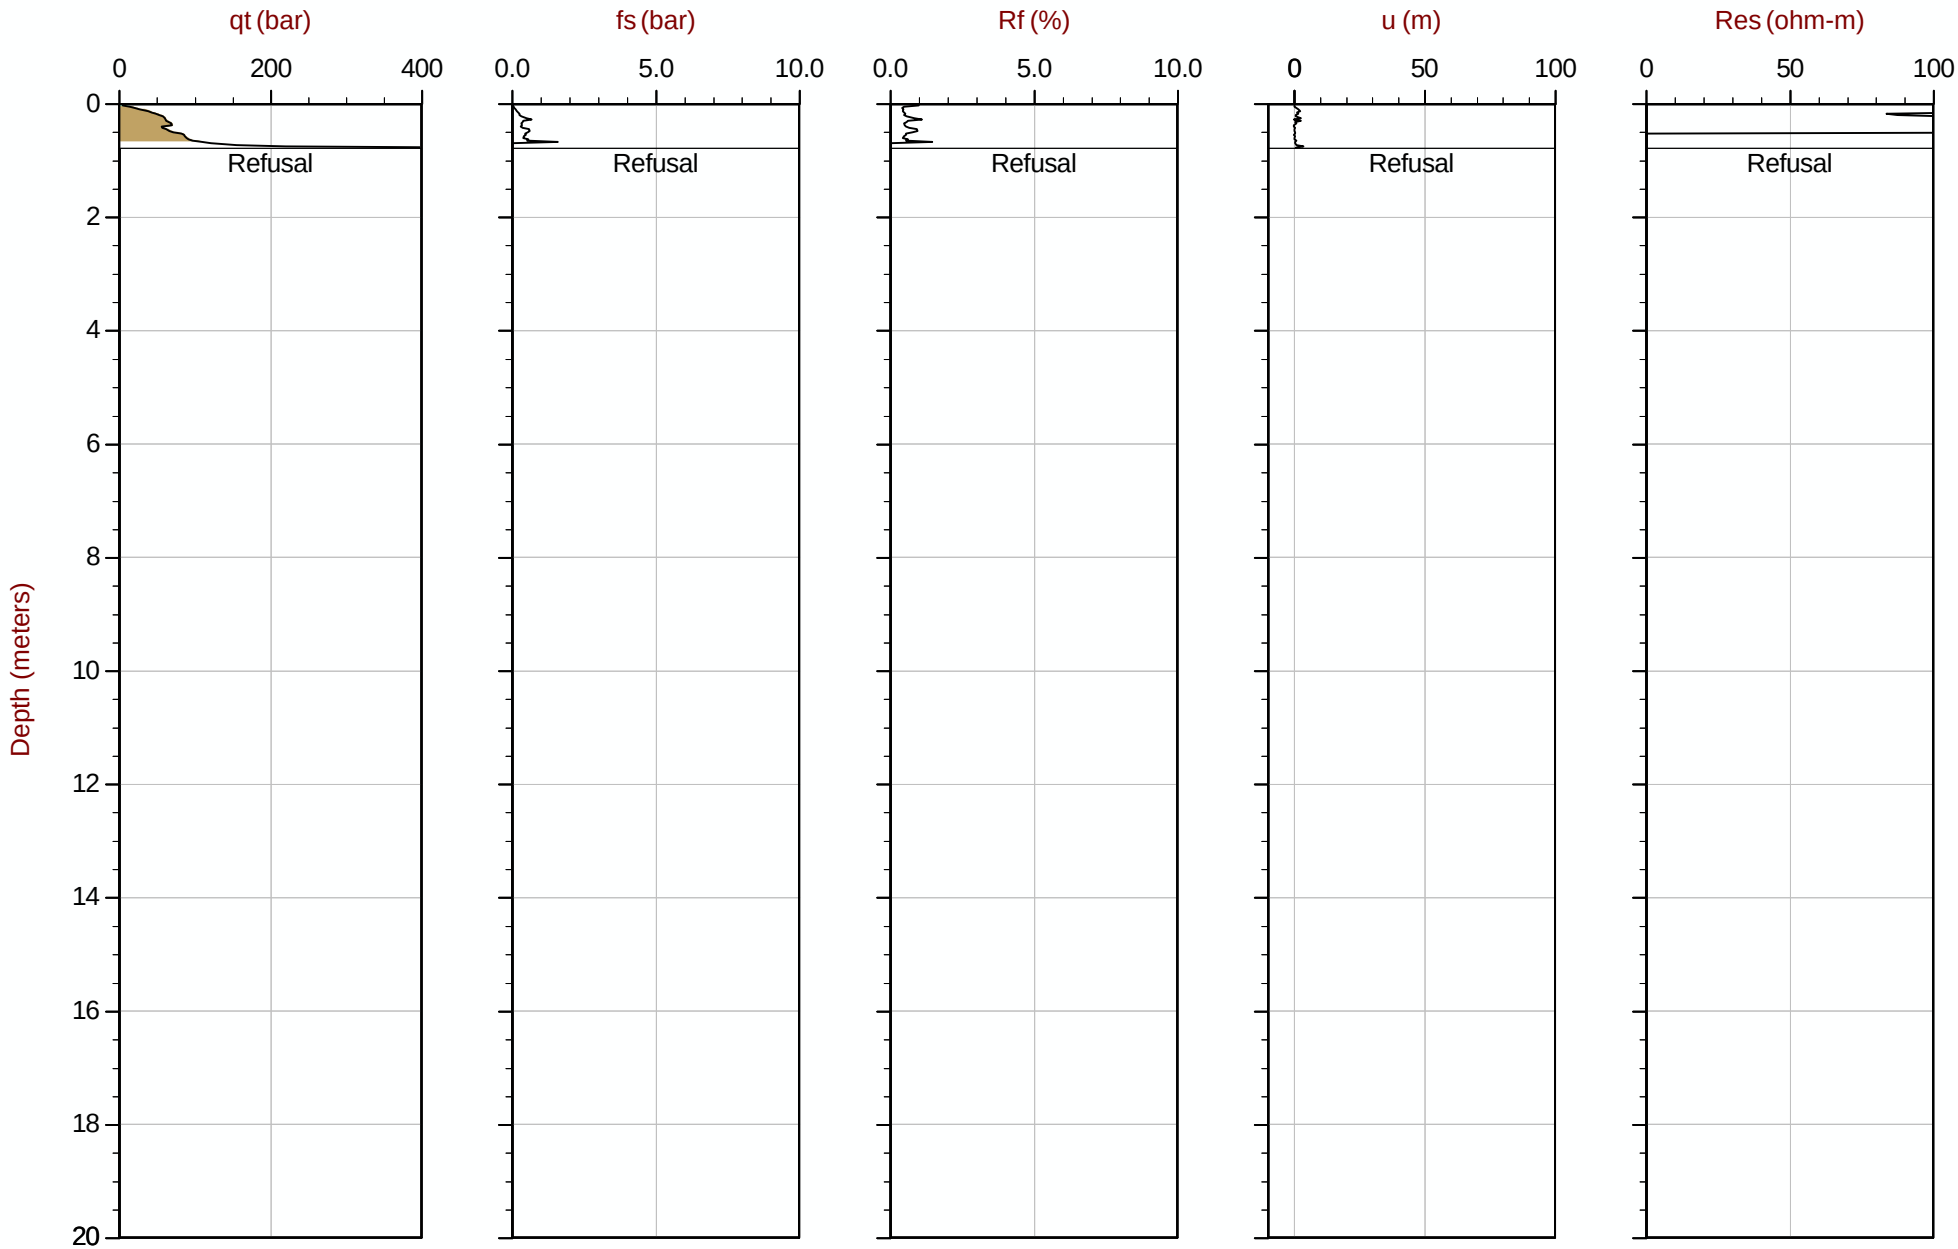

Max Depth: 0.775 m / 2.54 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT110A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612594m E: 414669m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 17:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110B
Cone: 750:T1500F15U35 Area= 15cm2

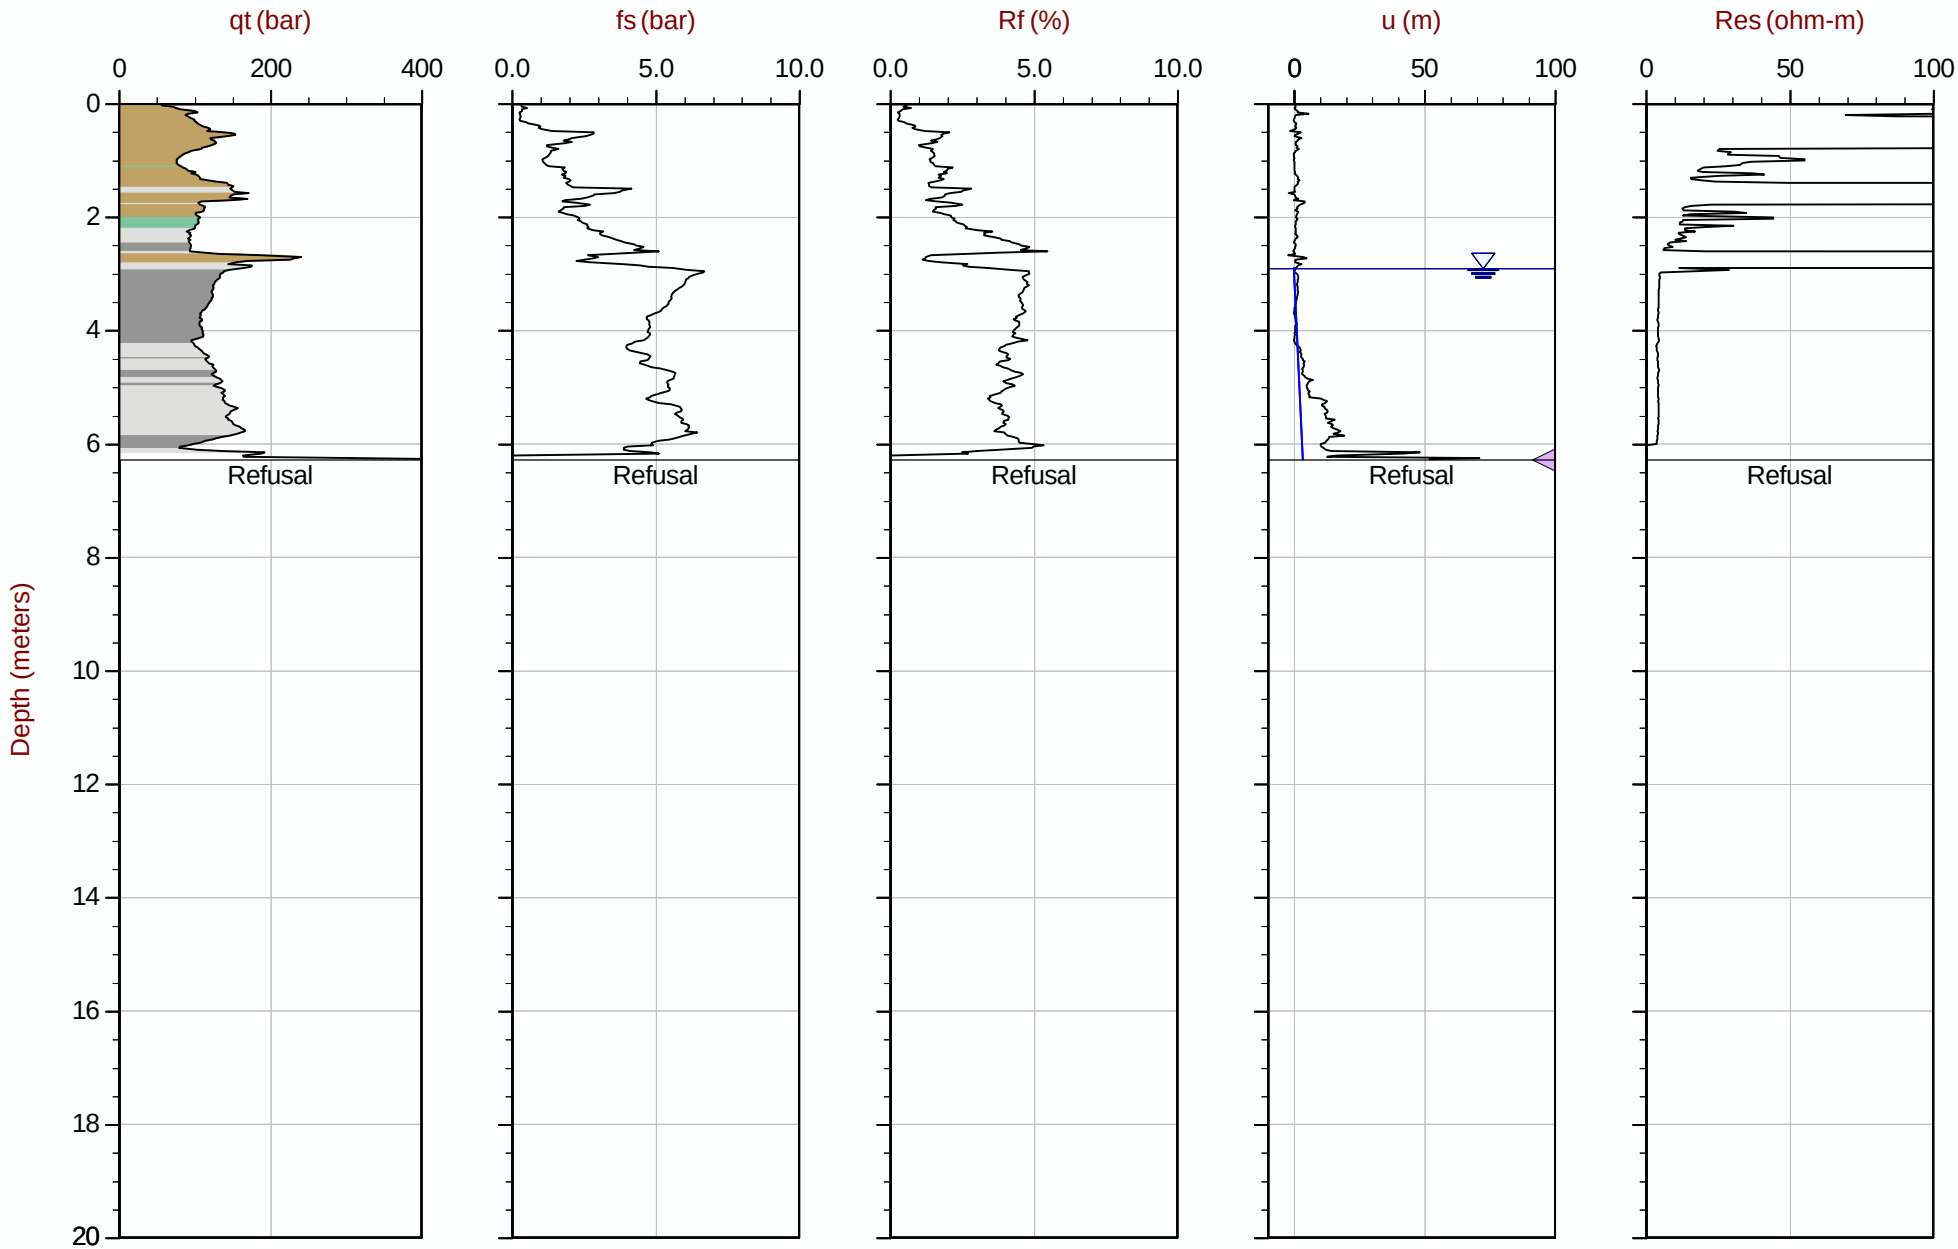

Max Depth: 6.275 m / 20.59 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT110B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612594m E: 414669m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 14:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT111
Cone: 750:T1500F15U35 Area= 15cm2

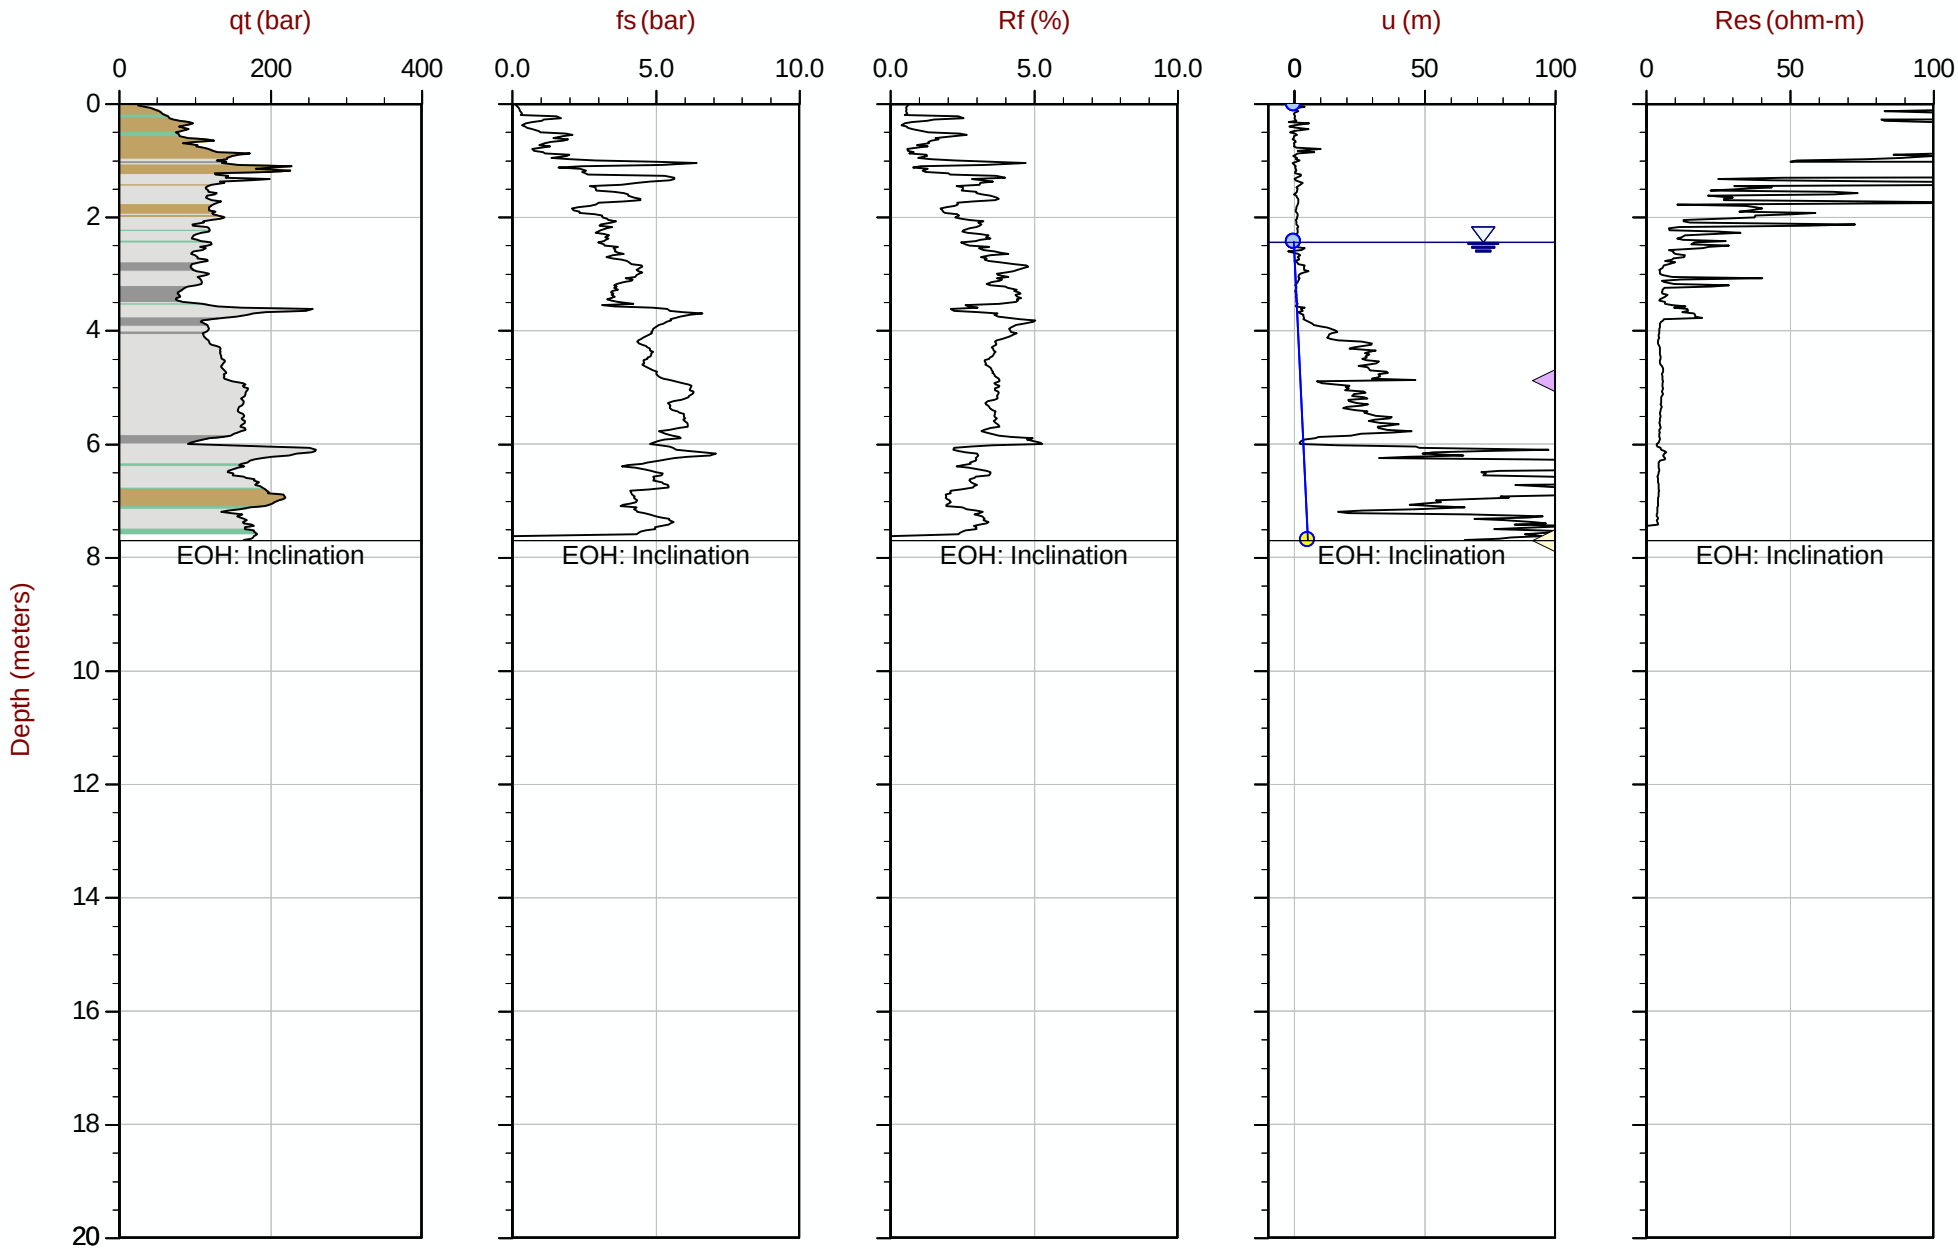

Max Depth: 7.700 m / 25.26 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT111.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612593m E: 414769m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 11:55
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT112
Cone: 750:T1500F15U35 Area= 15cm2

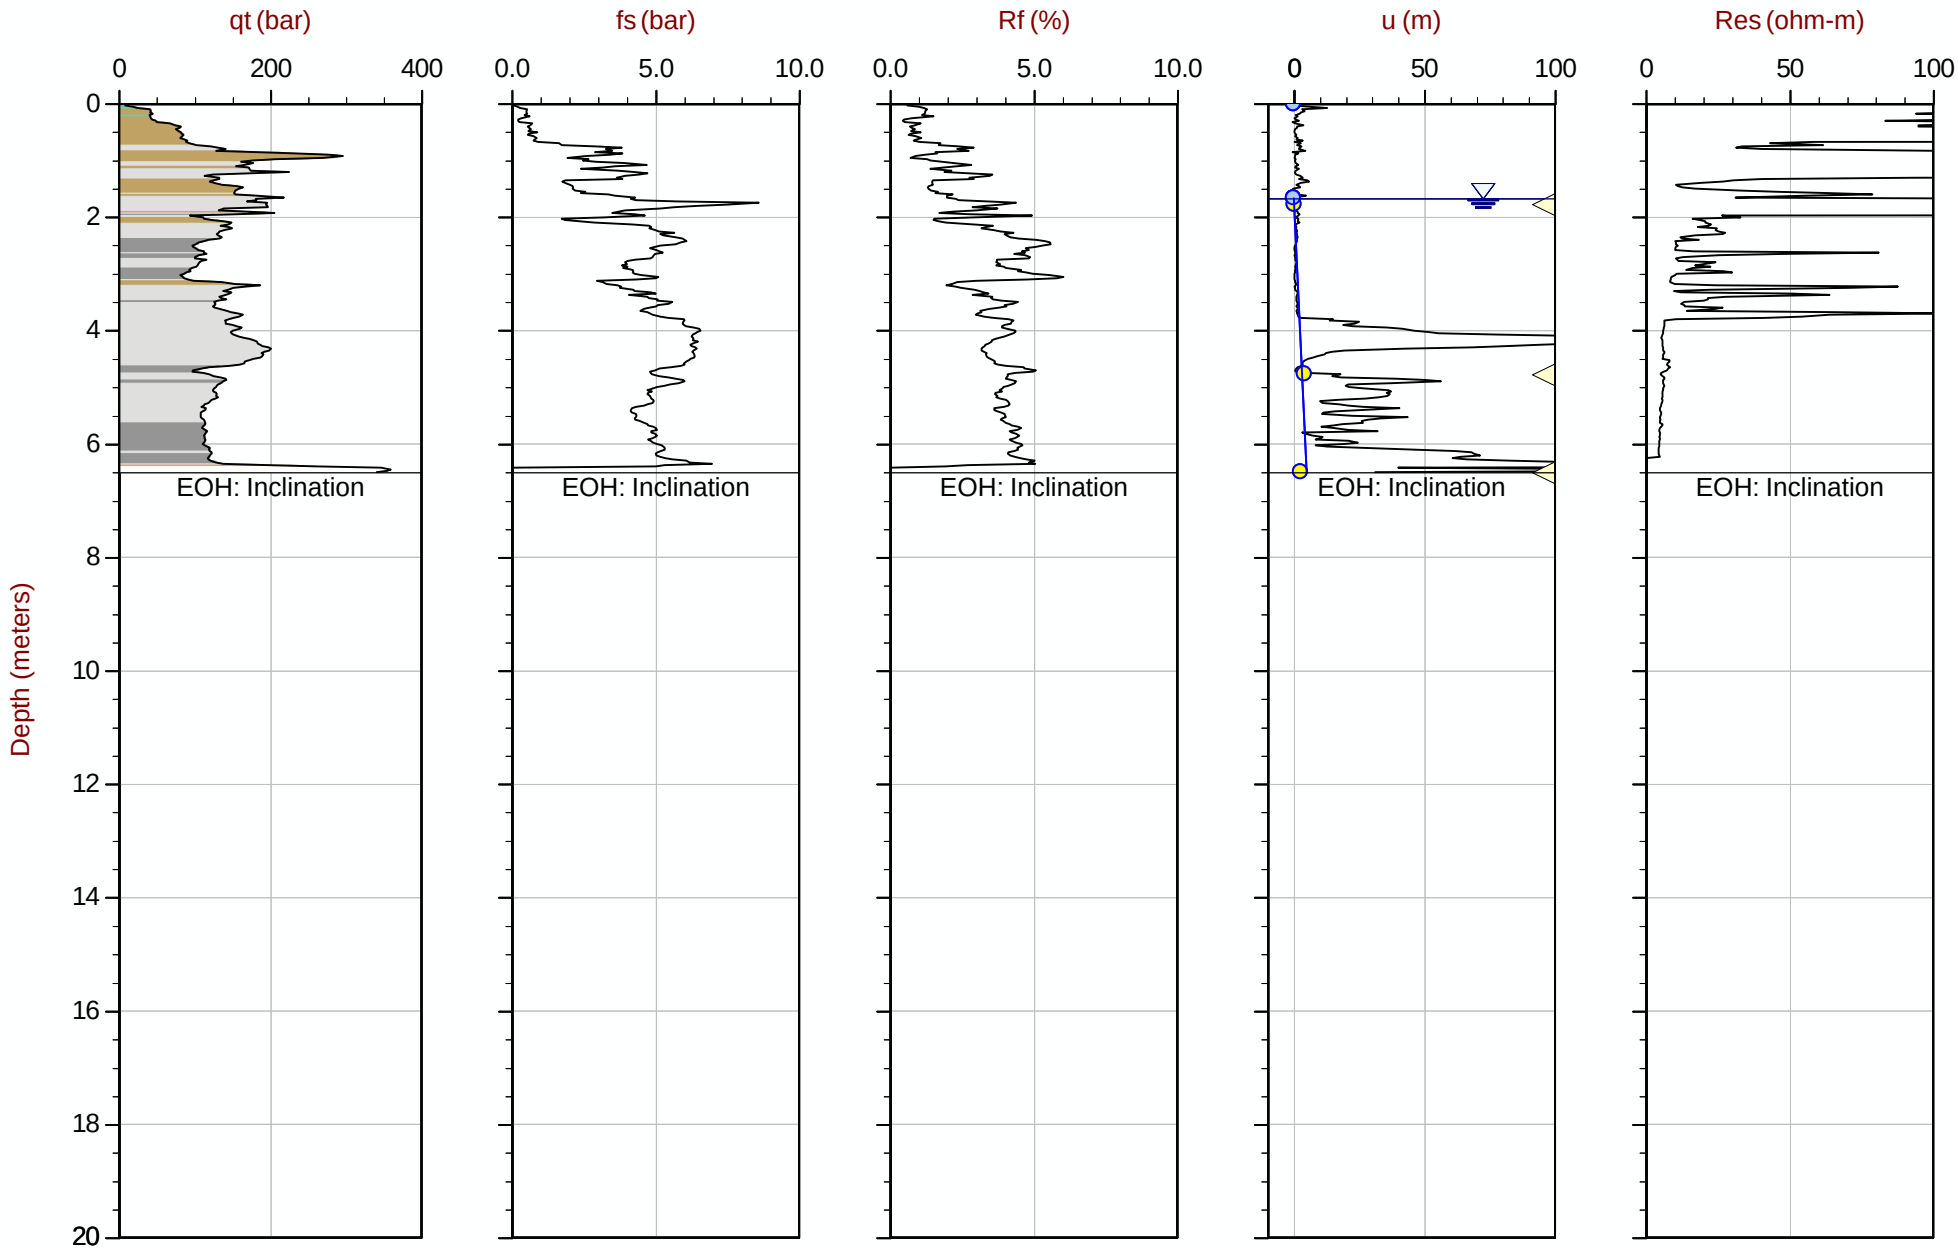

Max Depth: 6.500 m / 21.33 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT112.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612592m E: 414871m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 08:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT113
Cone: 750:T1500F15U35 Area= 15cm2

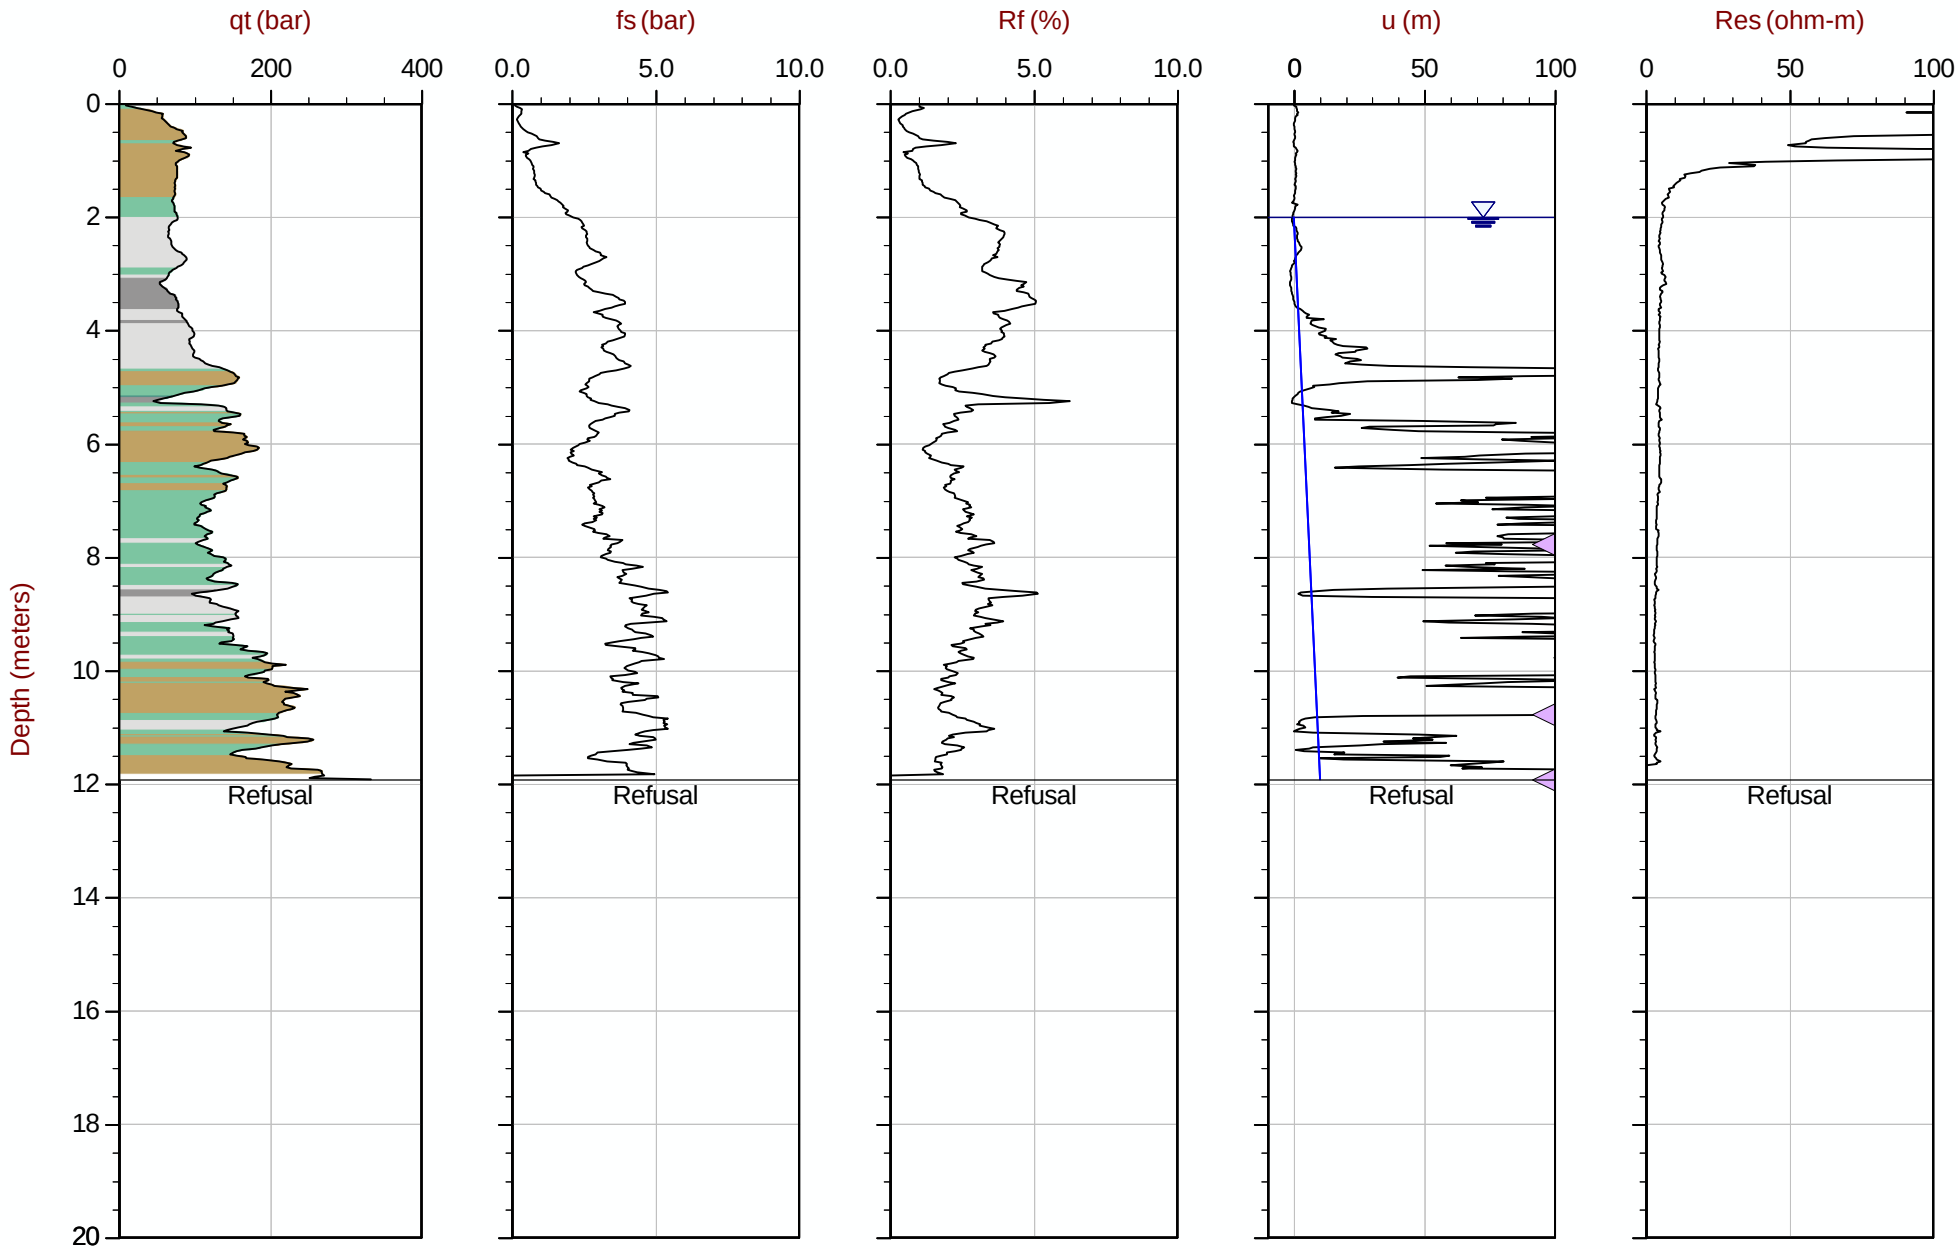

Max Depth: 11.925 m / 39.12 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT113.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612590m E: 414971m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 10:49
Site: Brooks, Alberta

Sounding: RCPT22-22CPT114
Cone: 750:T1500F15U35 Area= 15cm2

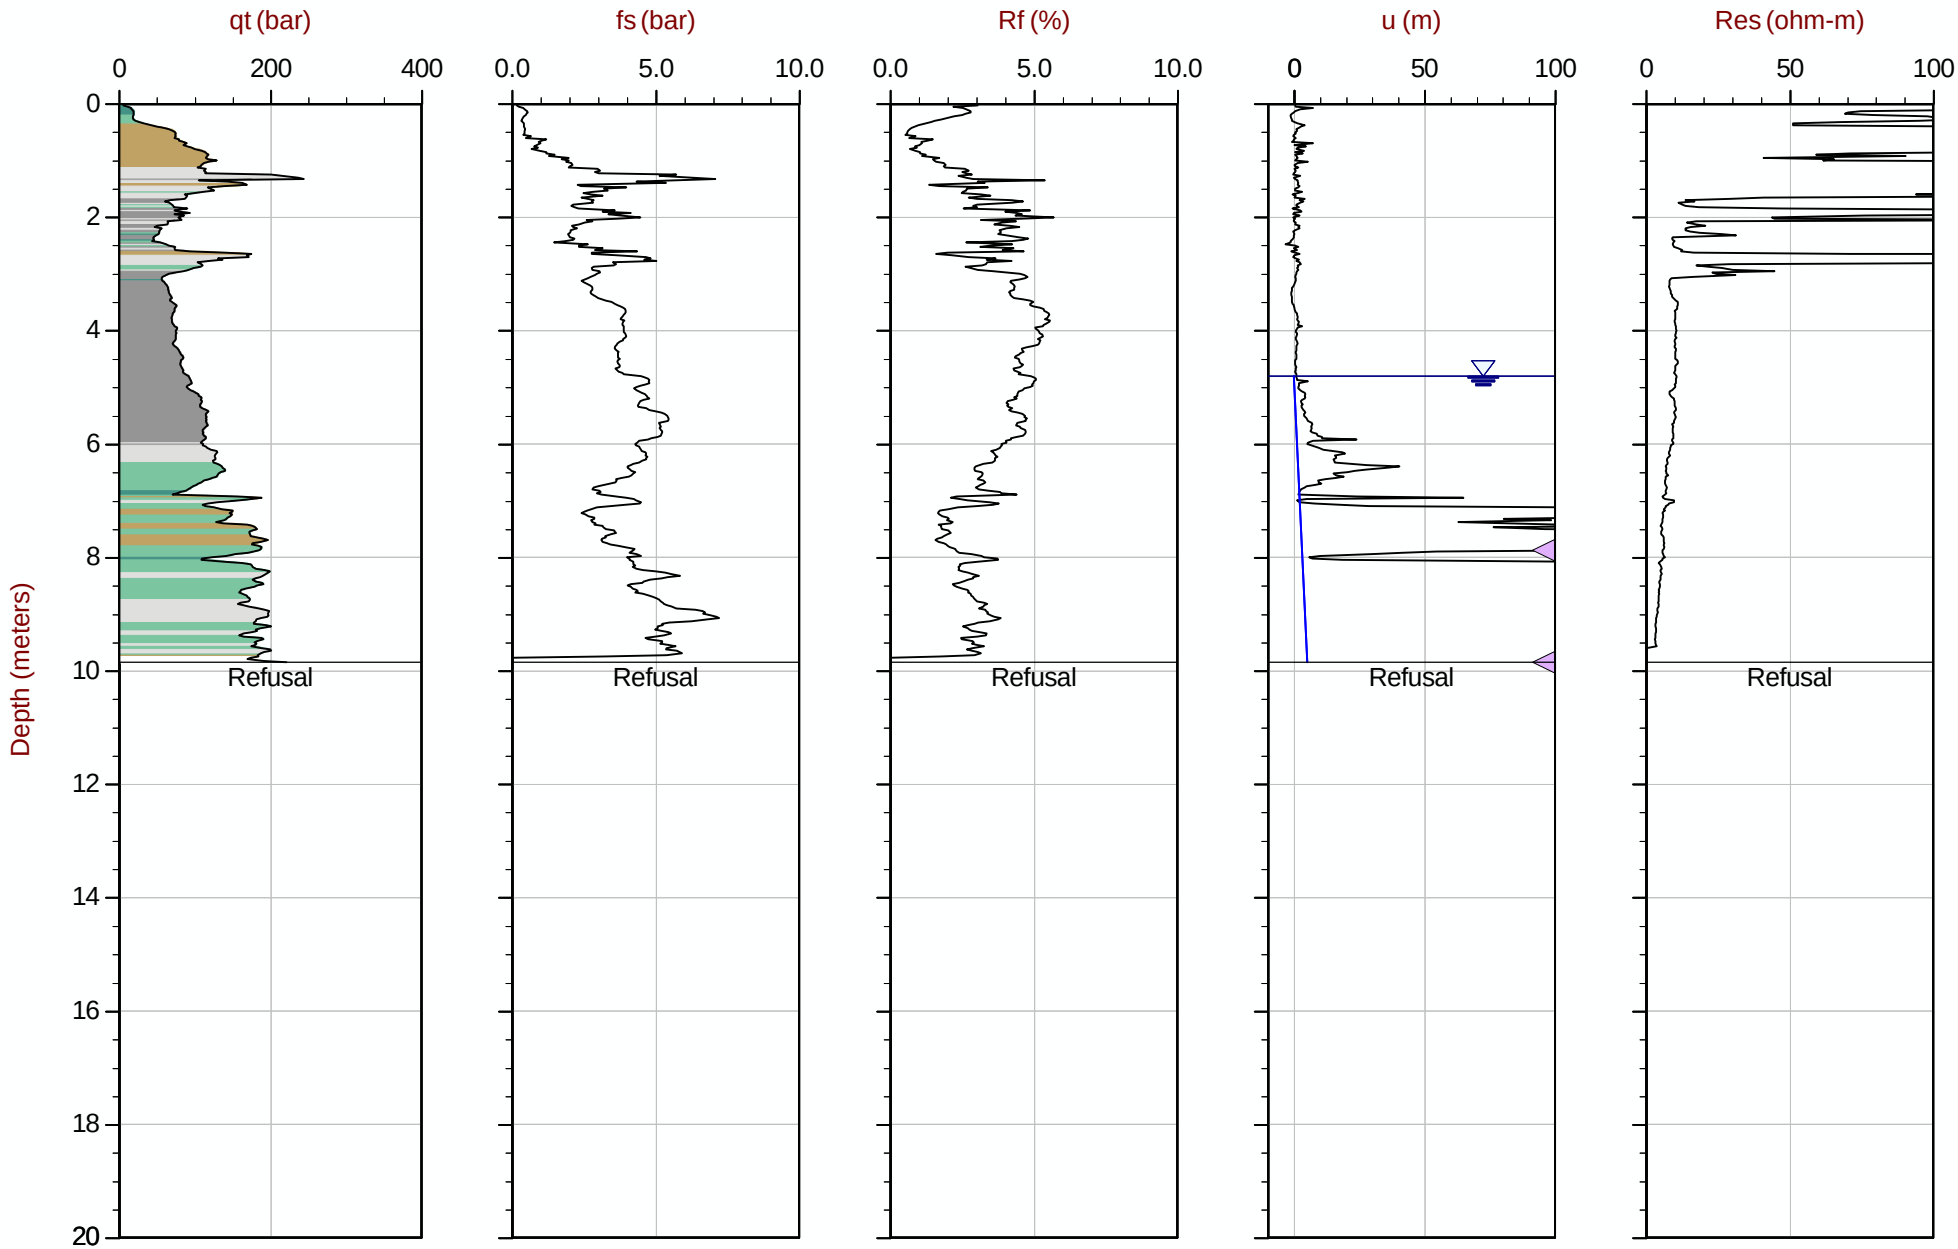

Max Depth: 9.850 m / 32.32 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT114.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612587m E: 415072m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 07:30
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT115
Cone: 822:T1000F10U35 Area= 15cm2

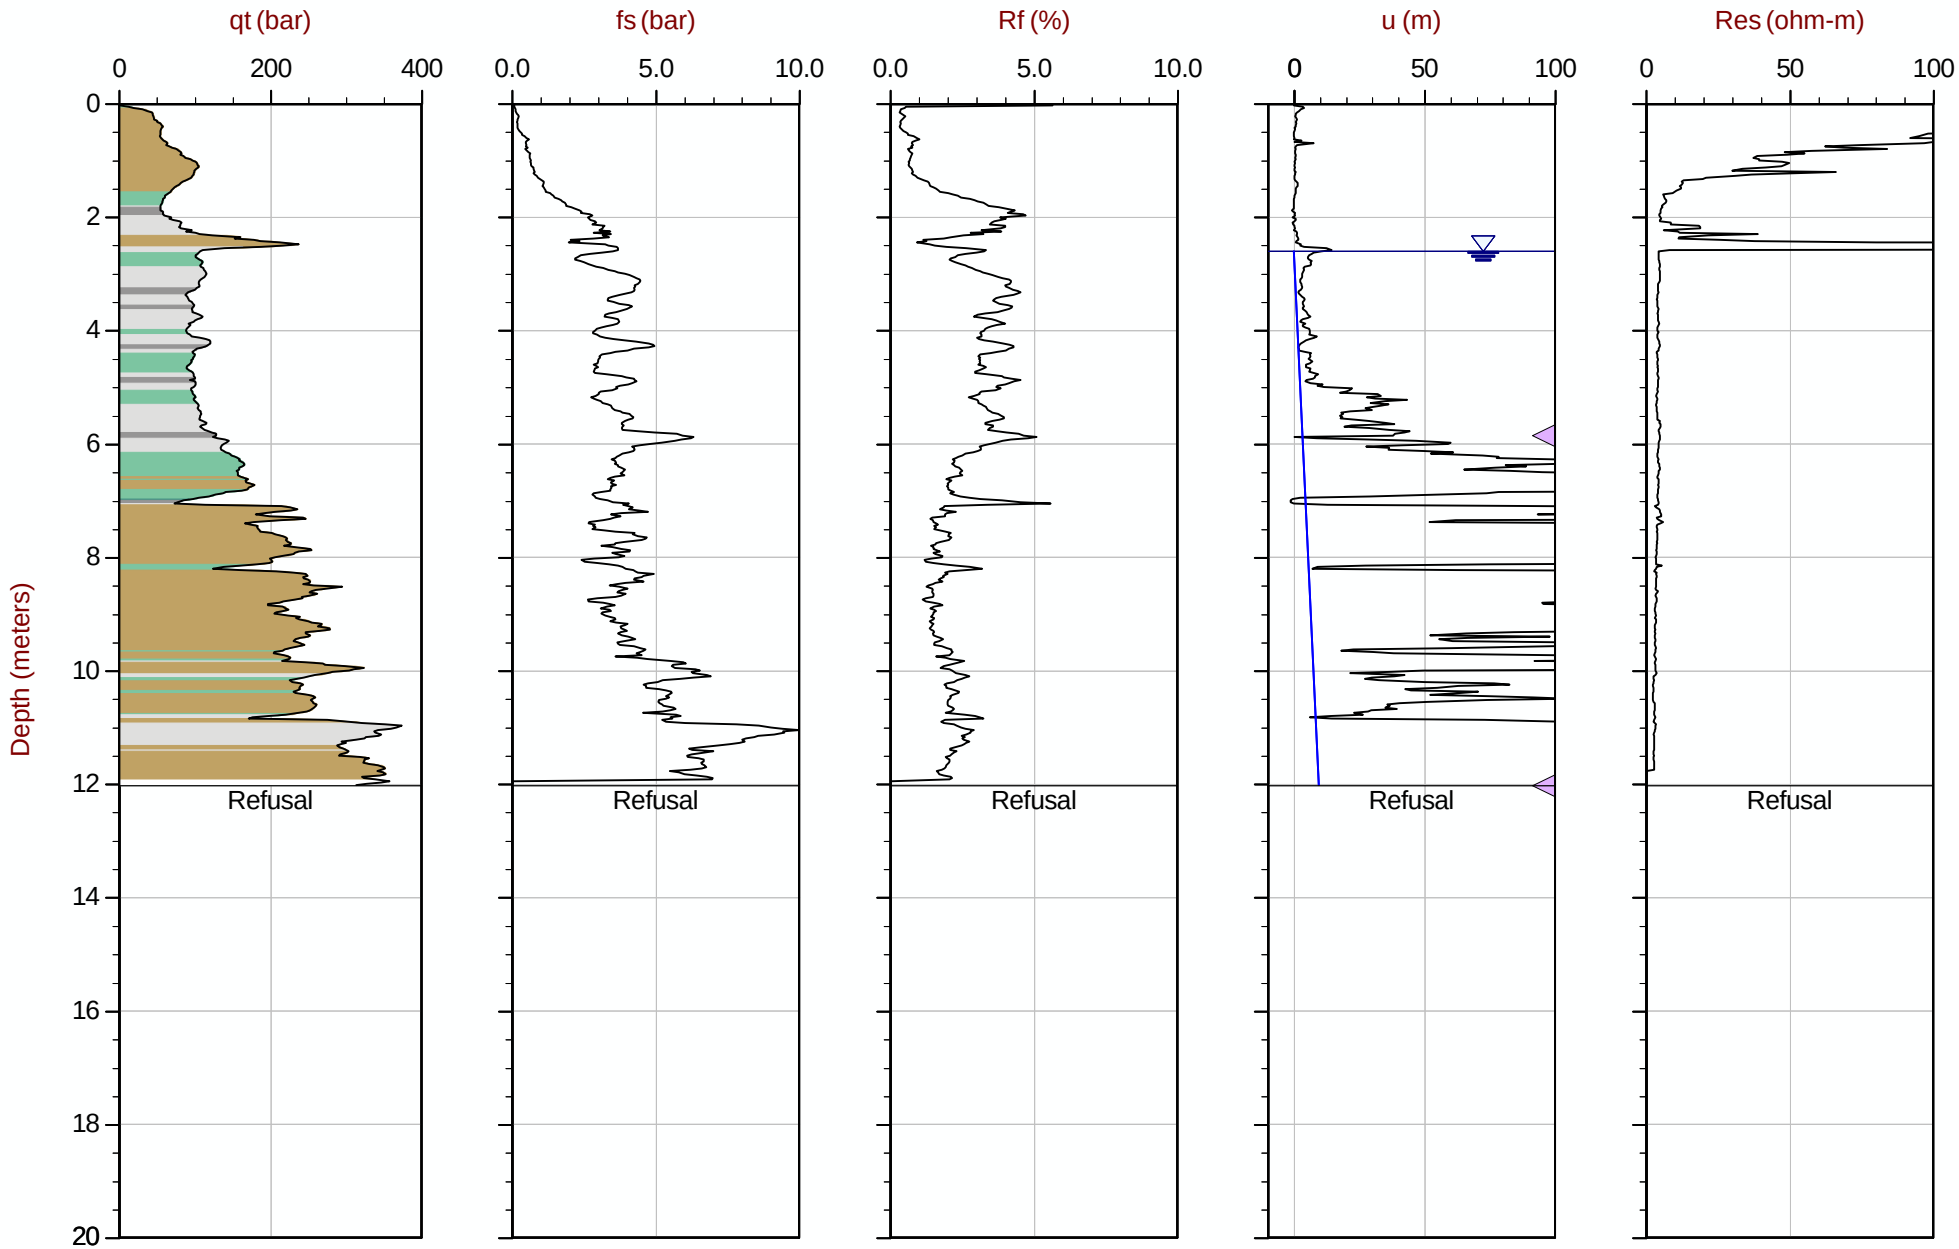

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT115.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612567m E: 415168m Elev: 776.263m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 16:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT117
Cone: 822:T1000F10U35 Area= 15cm2

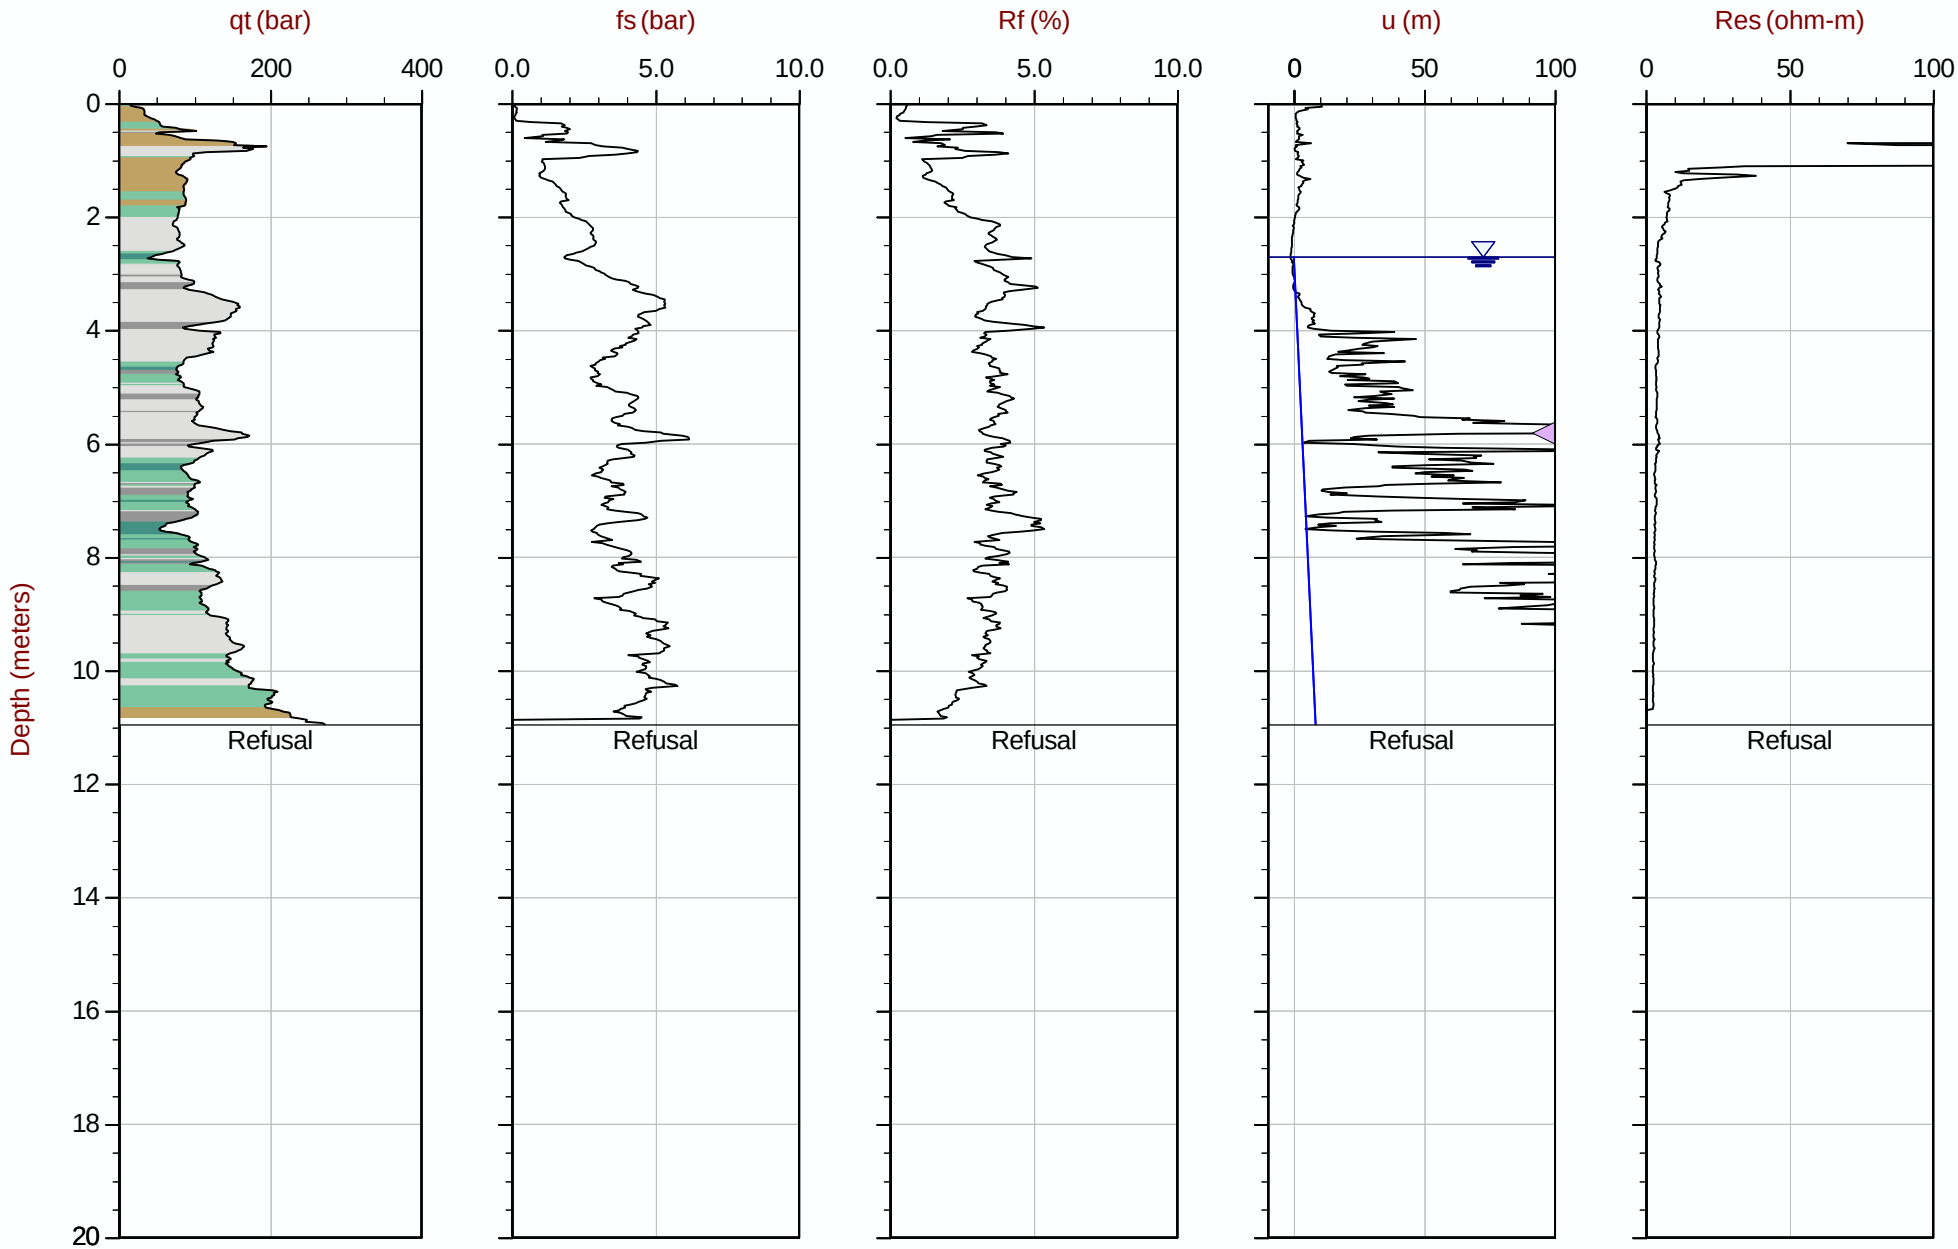

Max Depth: 10.950 m / 35.92 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT117.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612565m E: 415269m Elev: 775.224m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 08:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT118
Cone: 750:T1500F15U35 Area= 15cm2

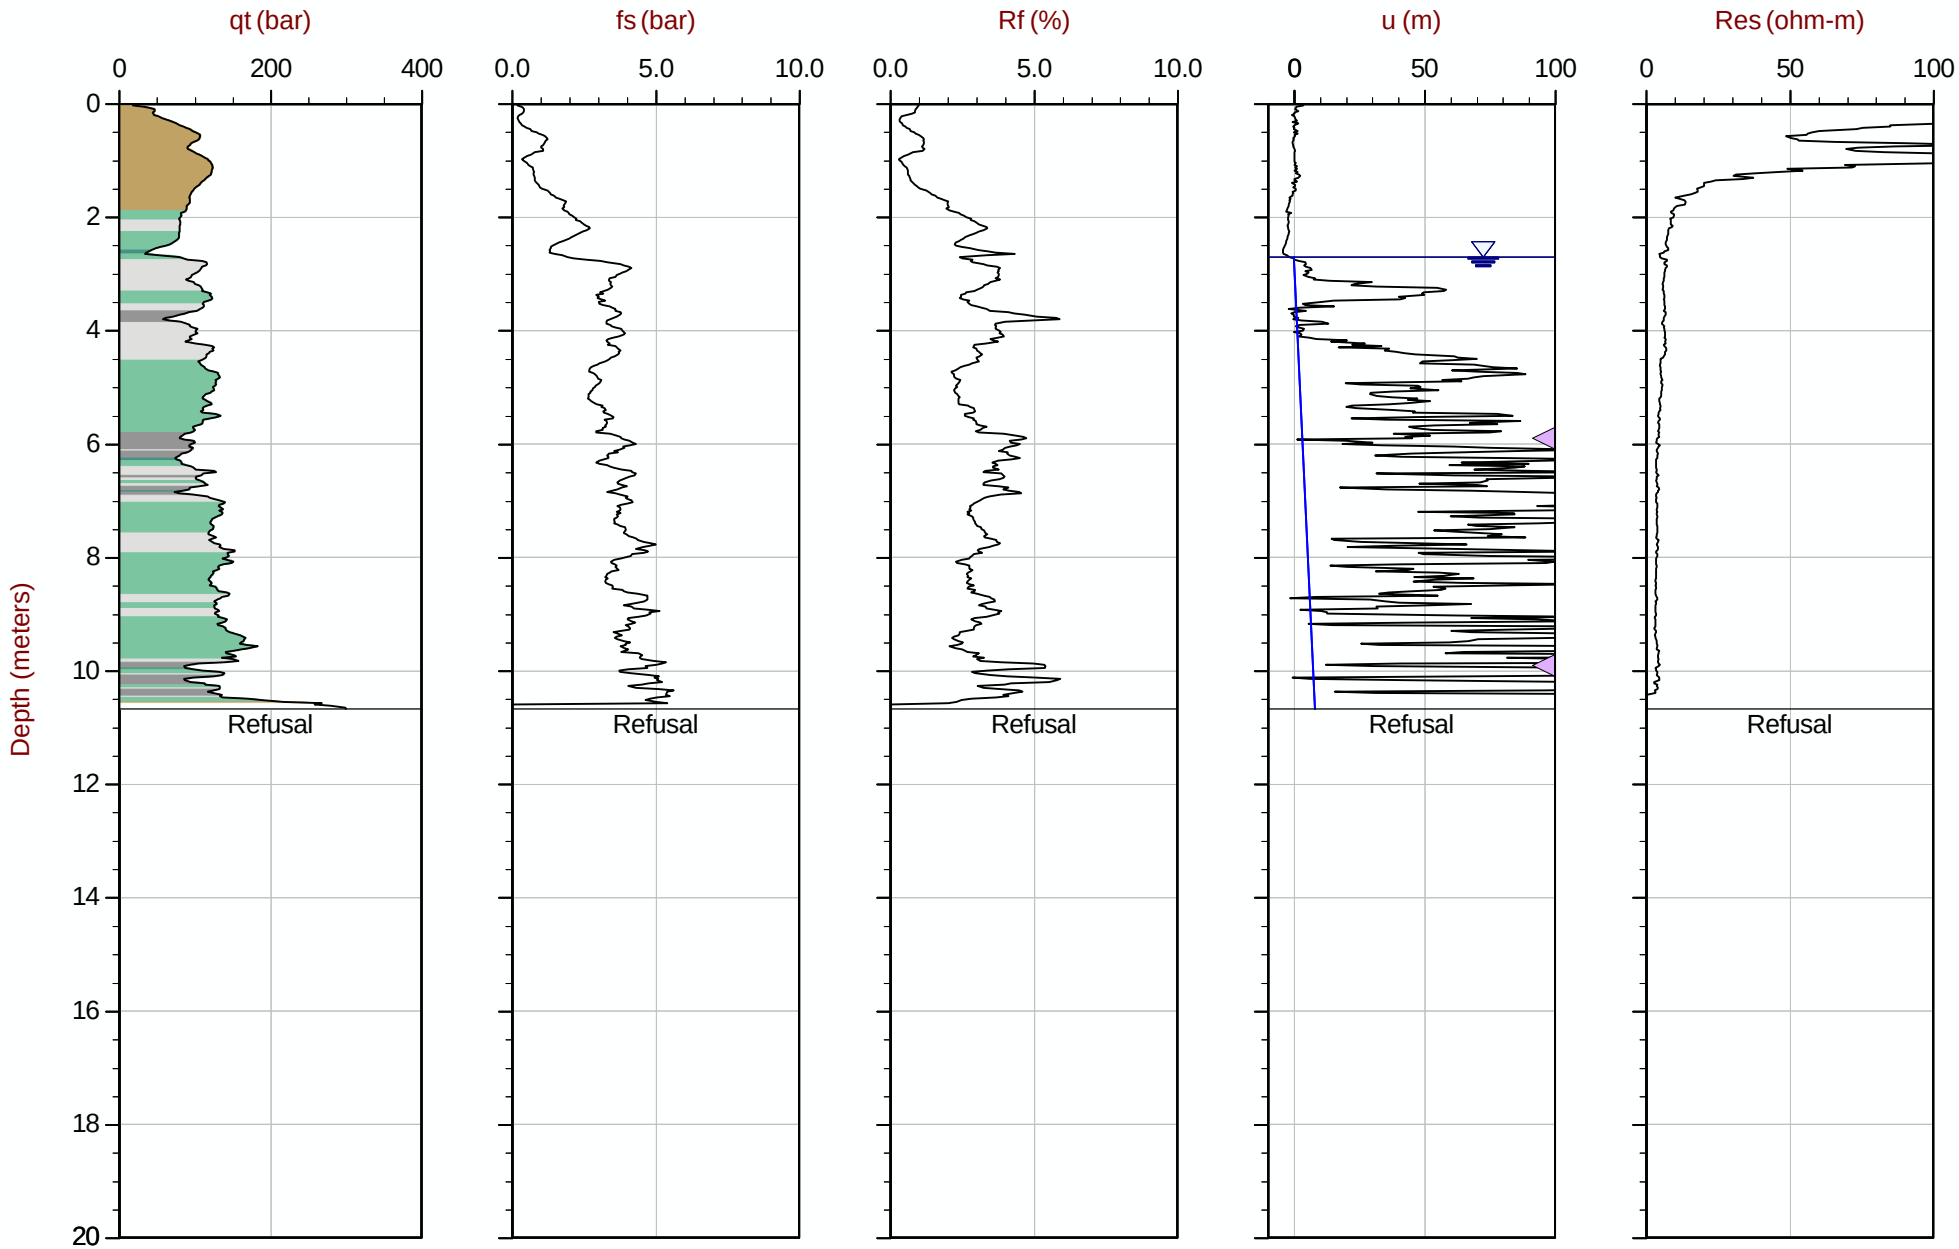

Max Depth: 10.675 m / 35.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT118.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612565m E: 415321m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 07:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT119
Cone: 750:T1500F15U35 Area= 15cm2

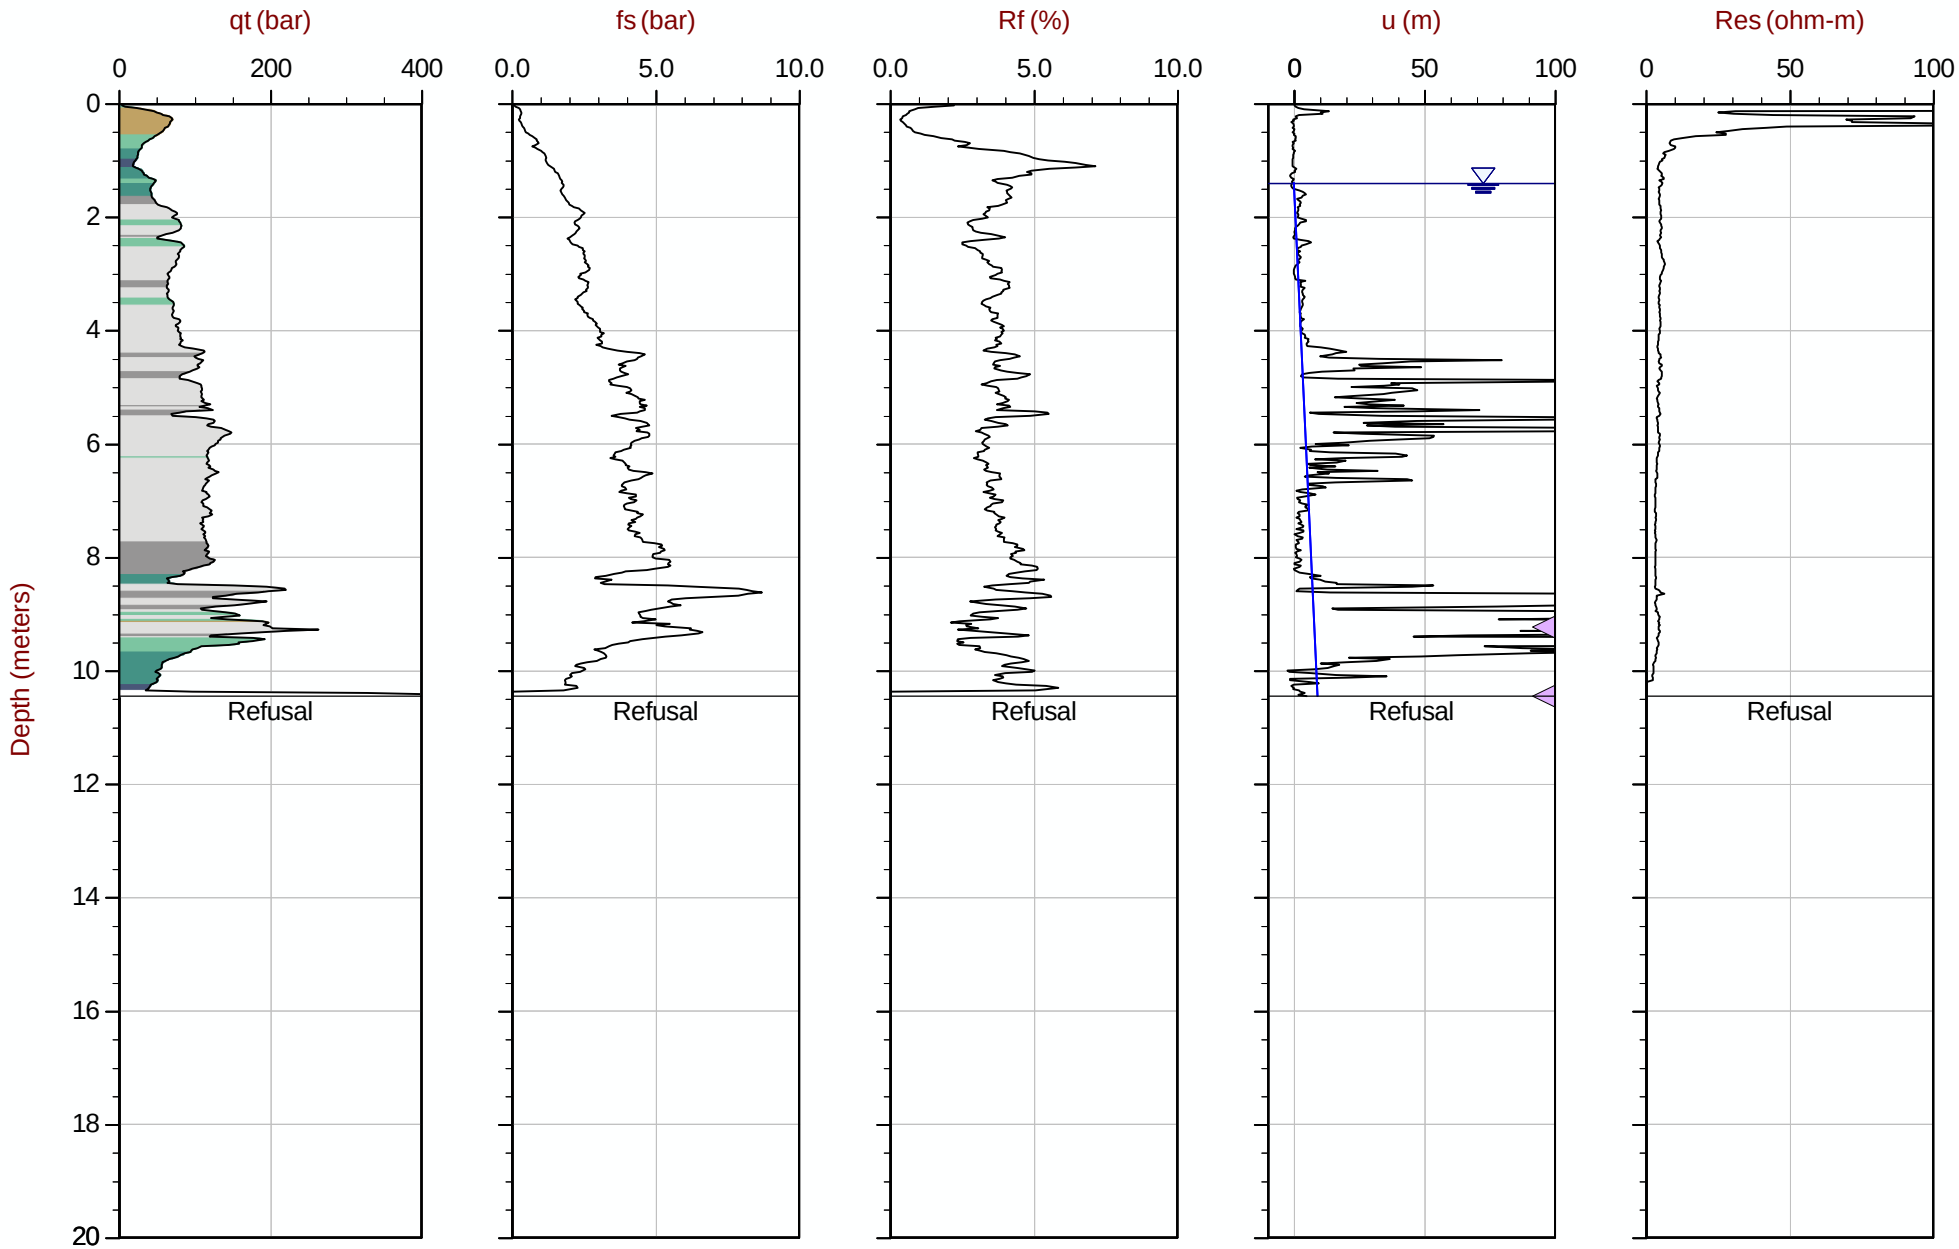

Max Depth: 10.450 m / 34.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT119.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612561m E: 415369m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 16:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT120
Cone: 750:T1500F15U35 Area= 15cm2

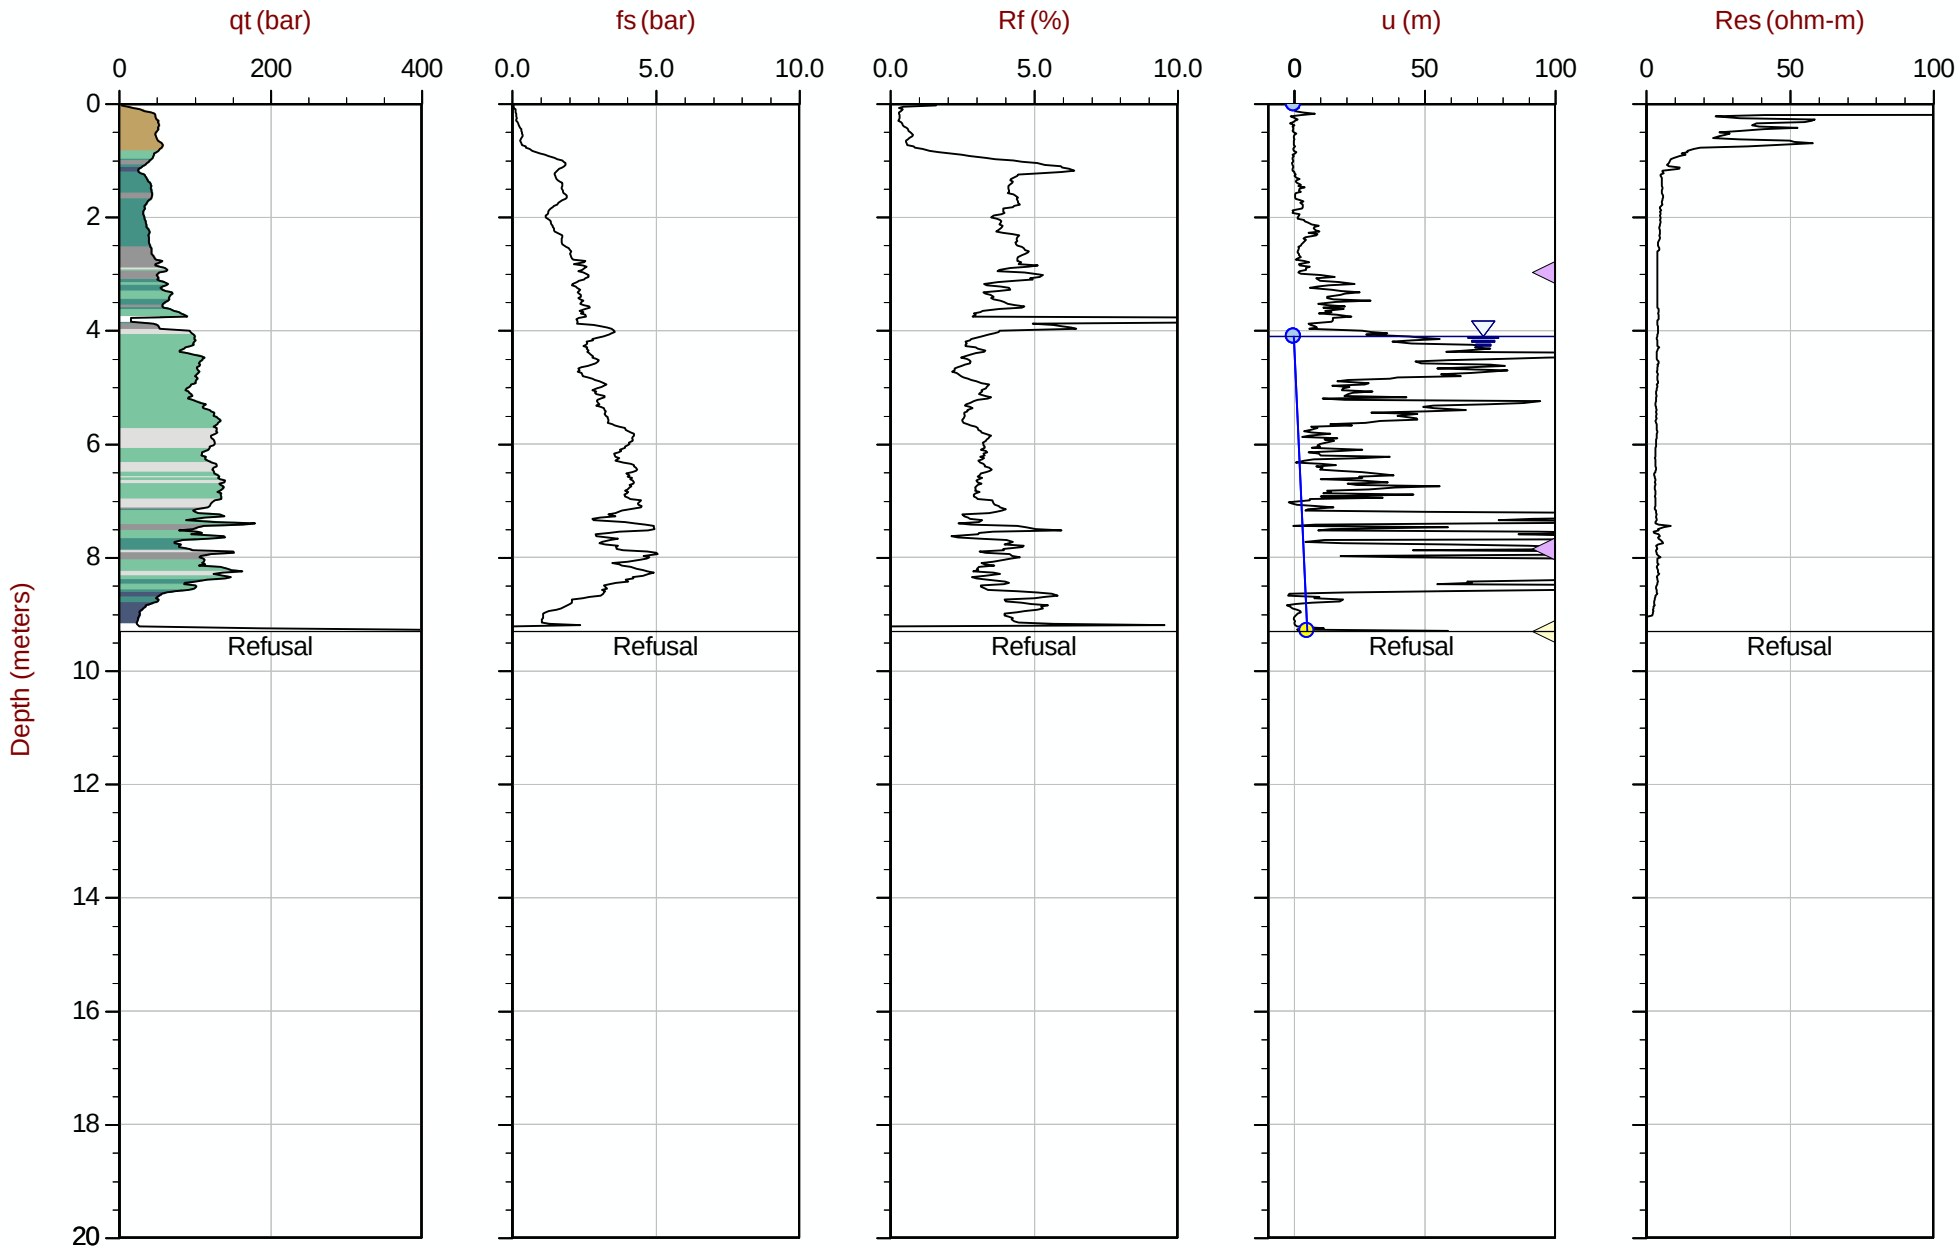

Max Depth: 9.300 m / 30.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT120.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612553m E: 415421m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 15:53
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT121
Cone: 750:T1500F15U35 Area= 15cm2

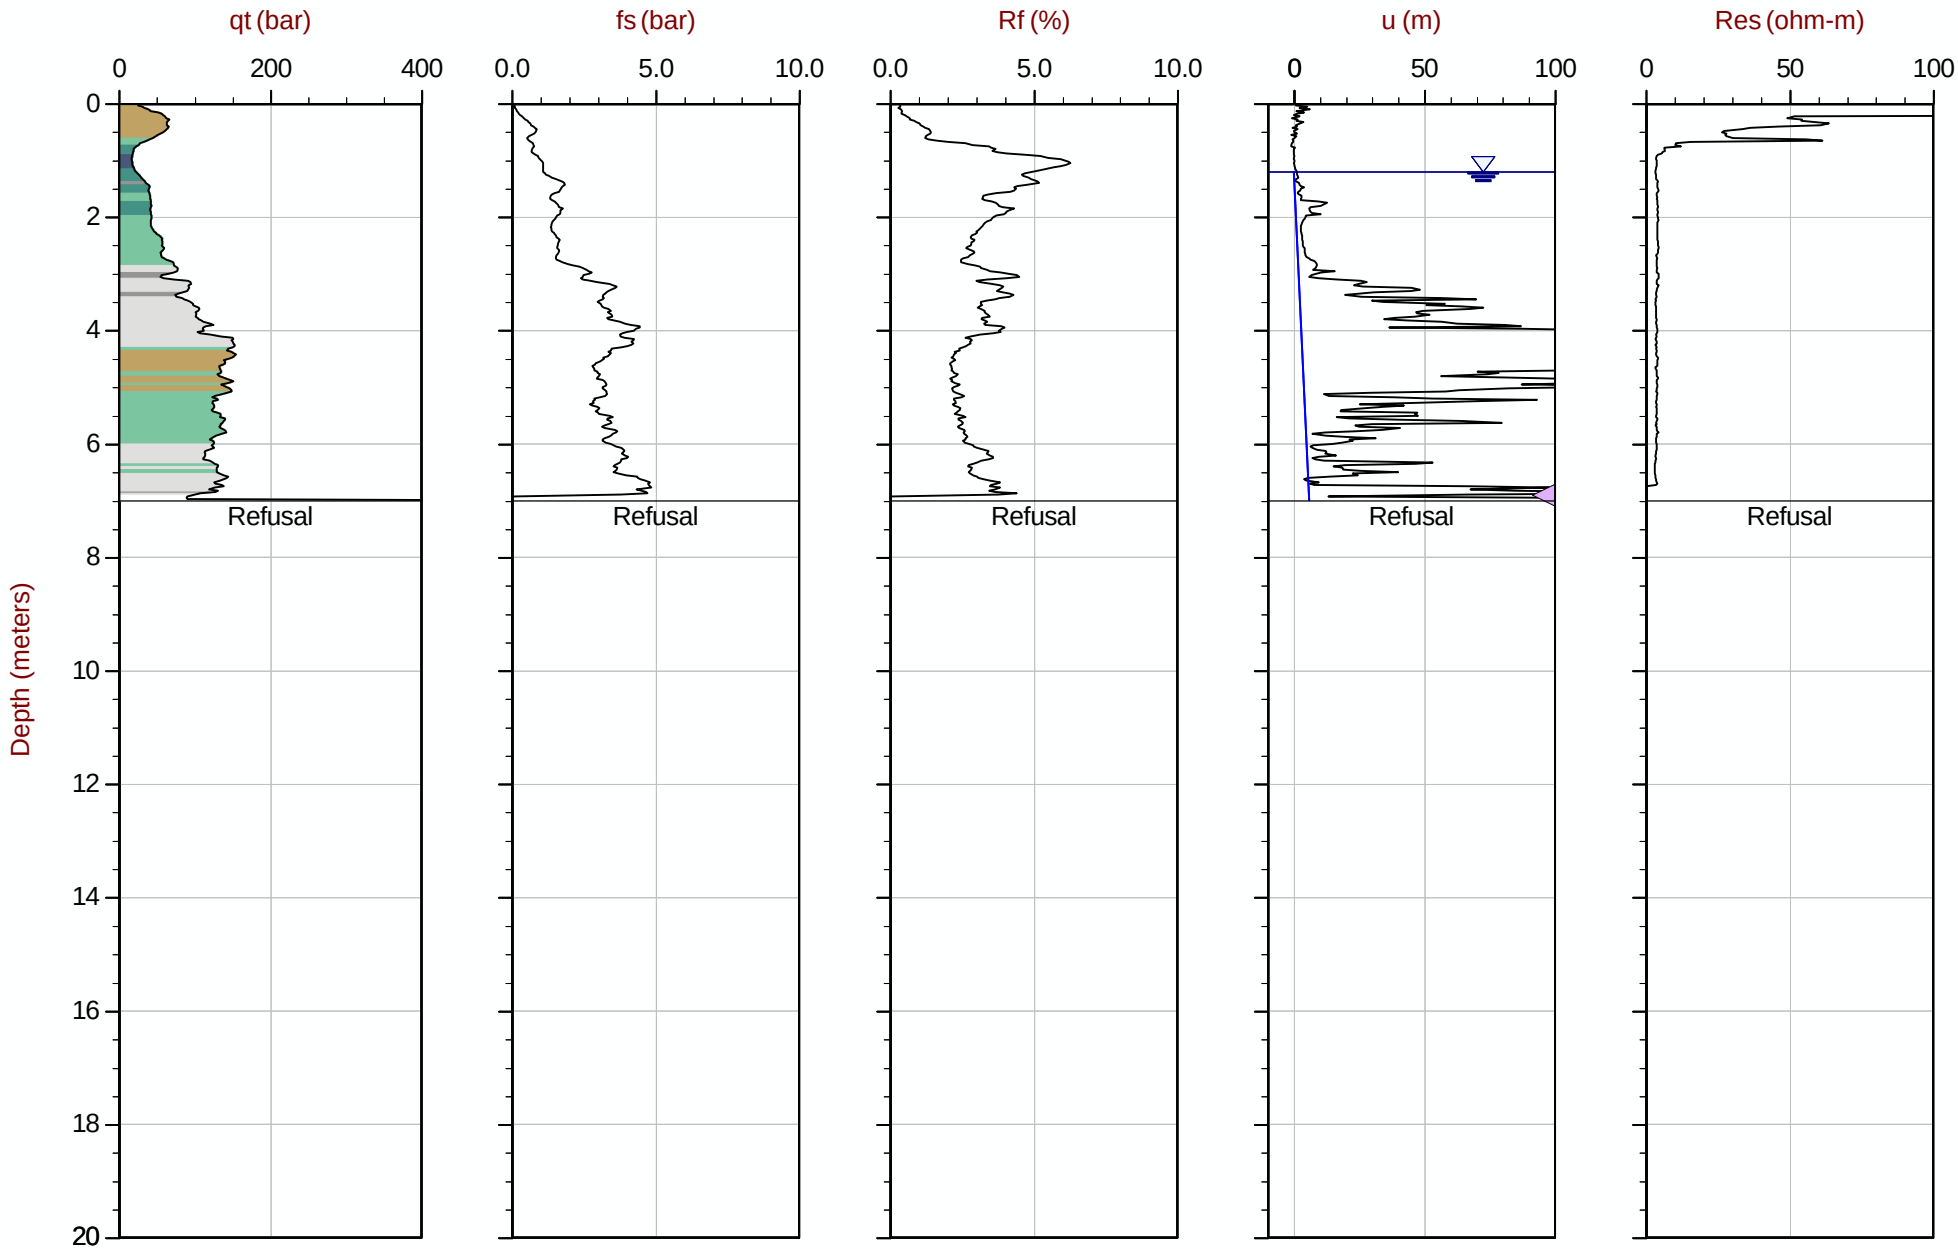

Max Depth: 7.000 m / 22.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT121.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612552m E: 415467m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 15:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT122
Cone: 822:T1000F10U35 Area= 15cm2

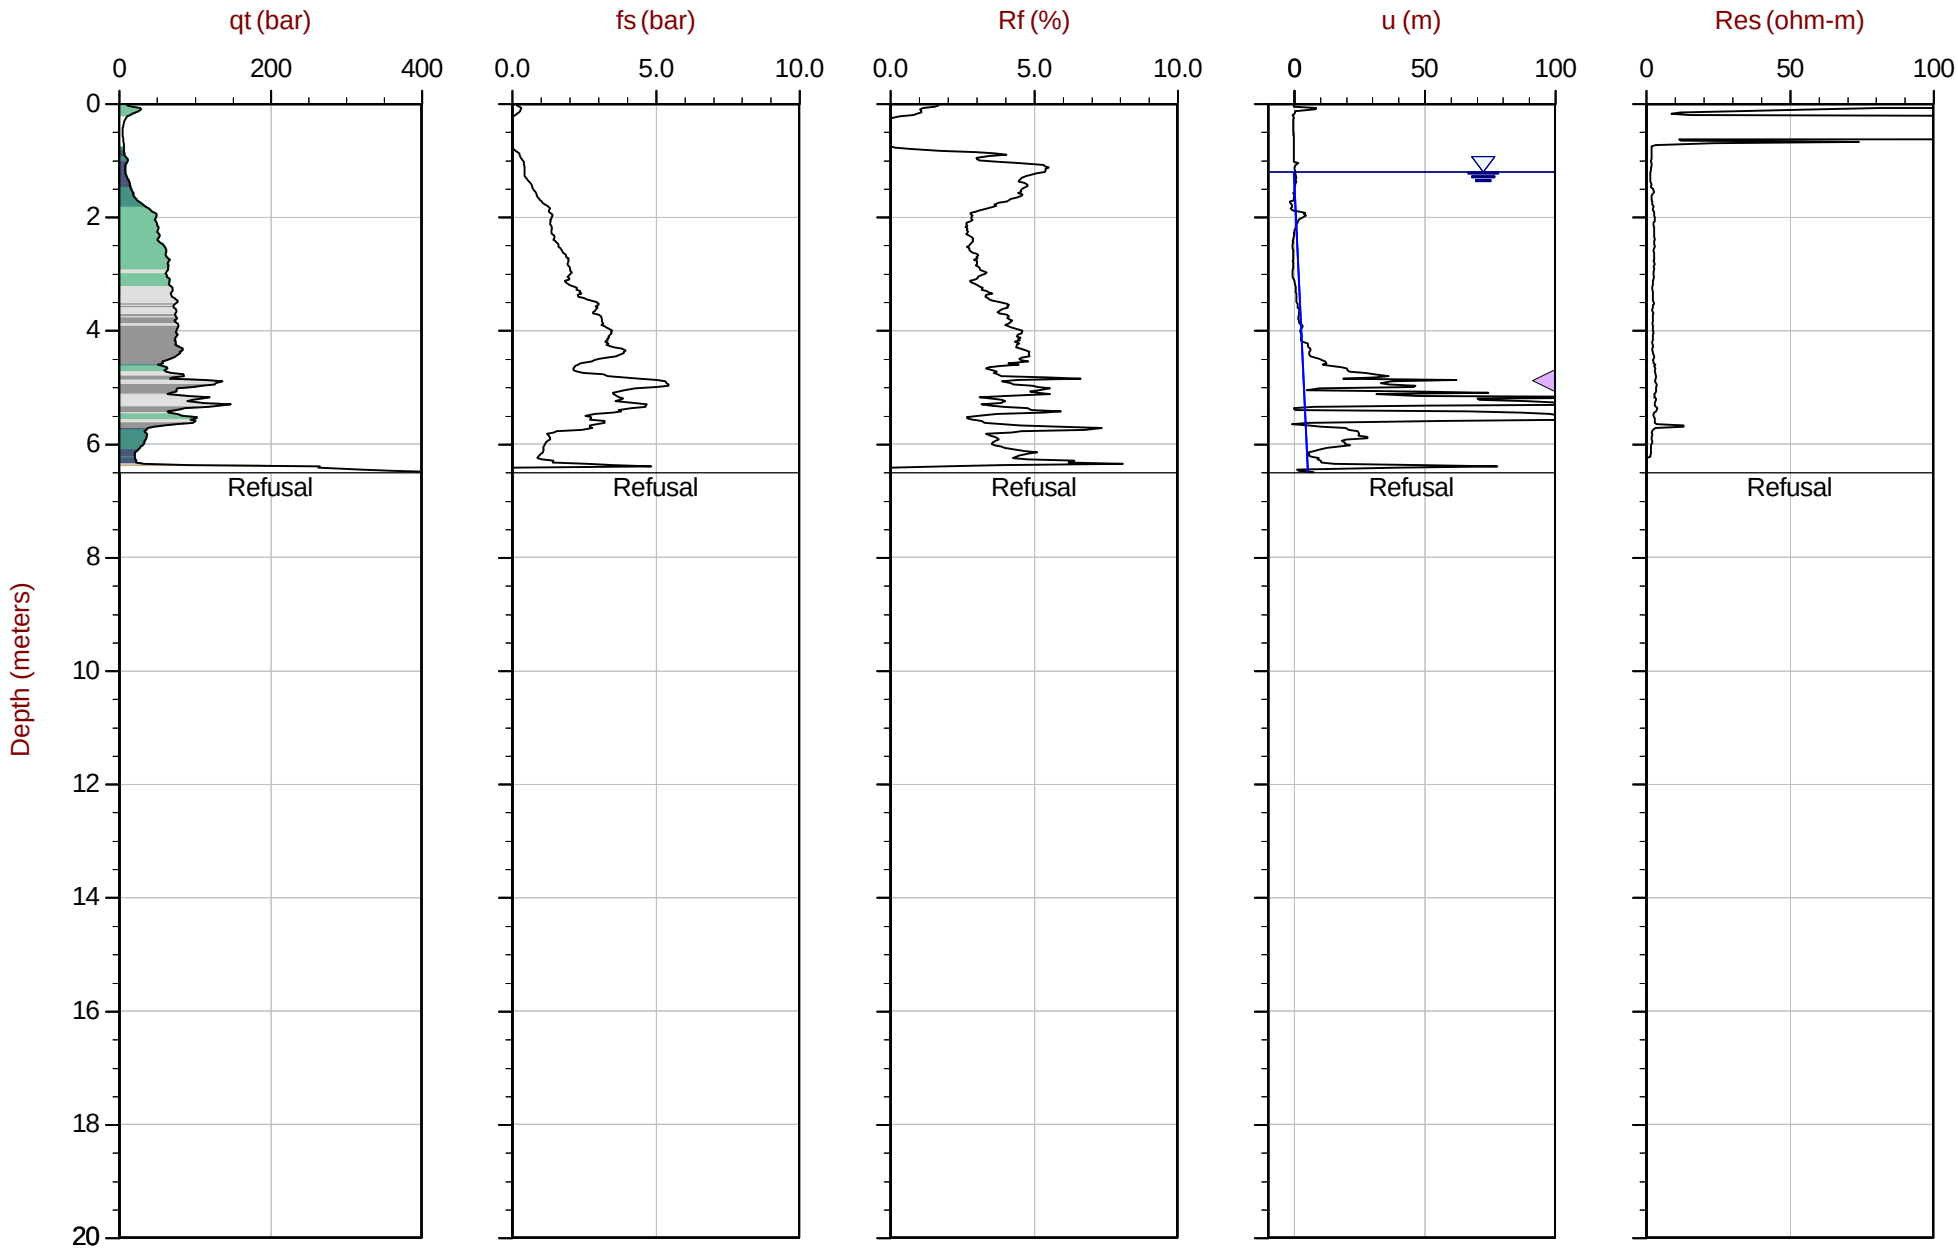

Max Depth: 6.500 m / 21.33 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT122.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612546m E: 415510m Elev: 772.300m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 13:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT123
Cone: 822:T1000F10U35 Area= 15cm2

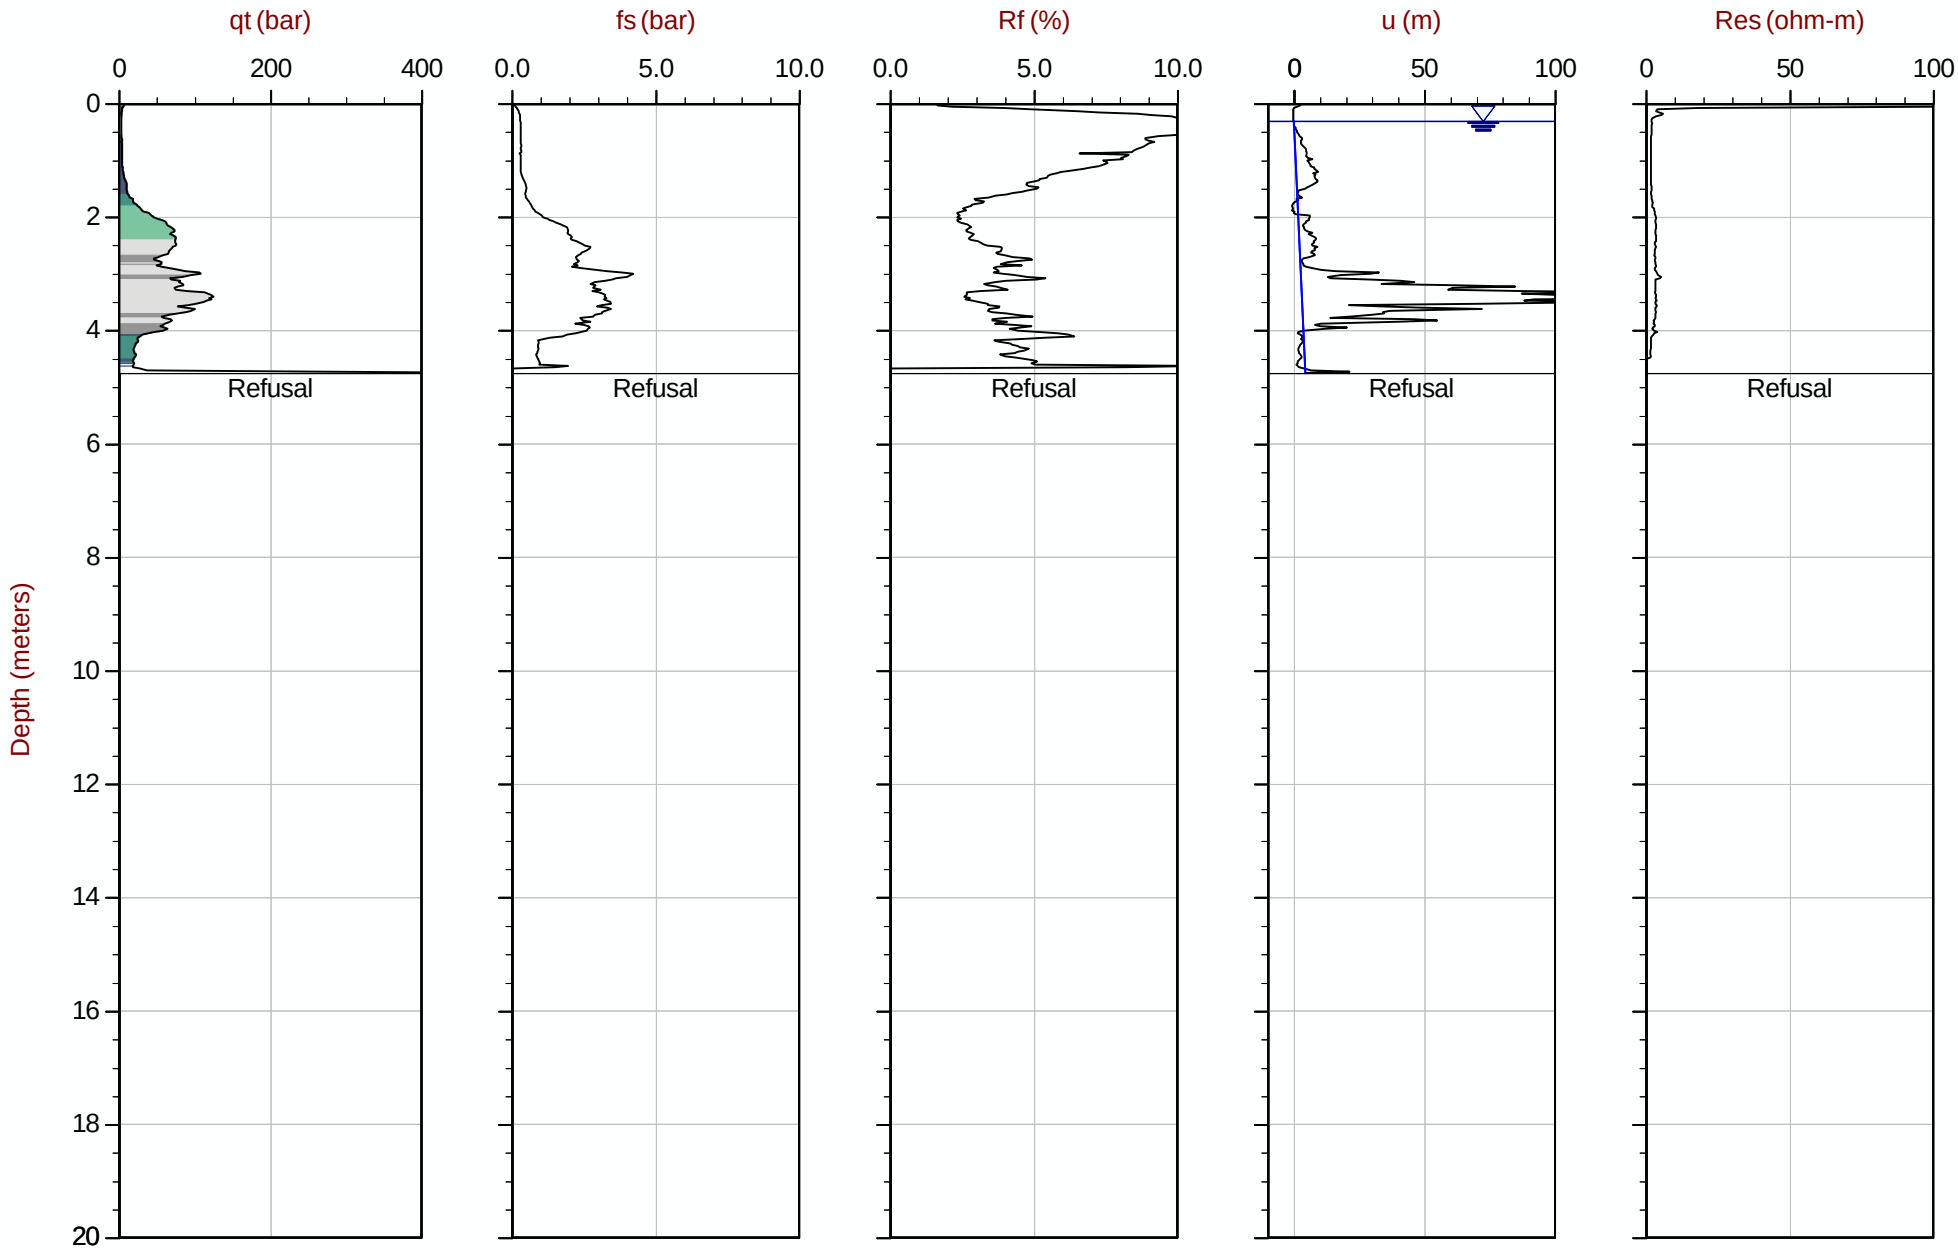

Max Depth: 4.750 m / 15.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT123.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612545m E: 415572m Elev: 771.601m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 13:29
Site: Brooks, Alberta

Sounding: RCPT22-22CPT123B
Cone: 822:T1000F10U35 Area= 15cm2

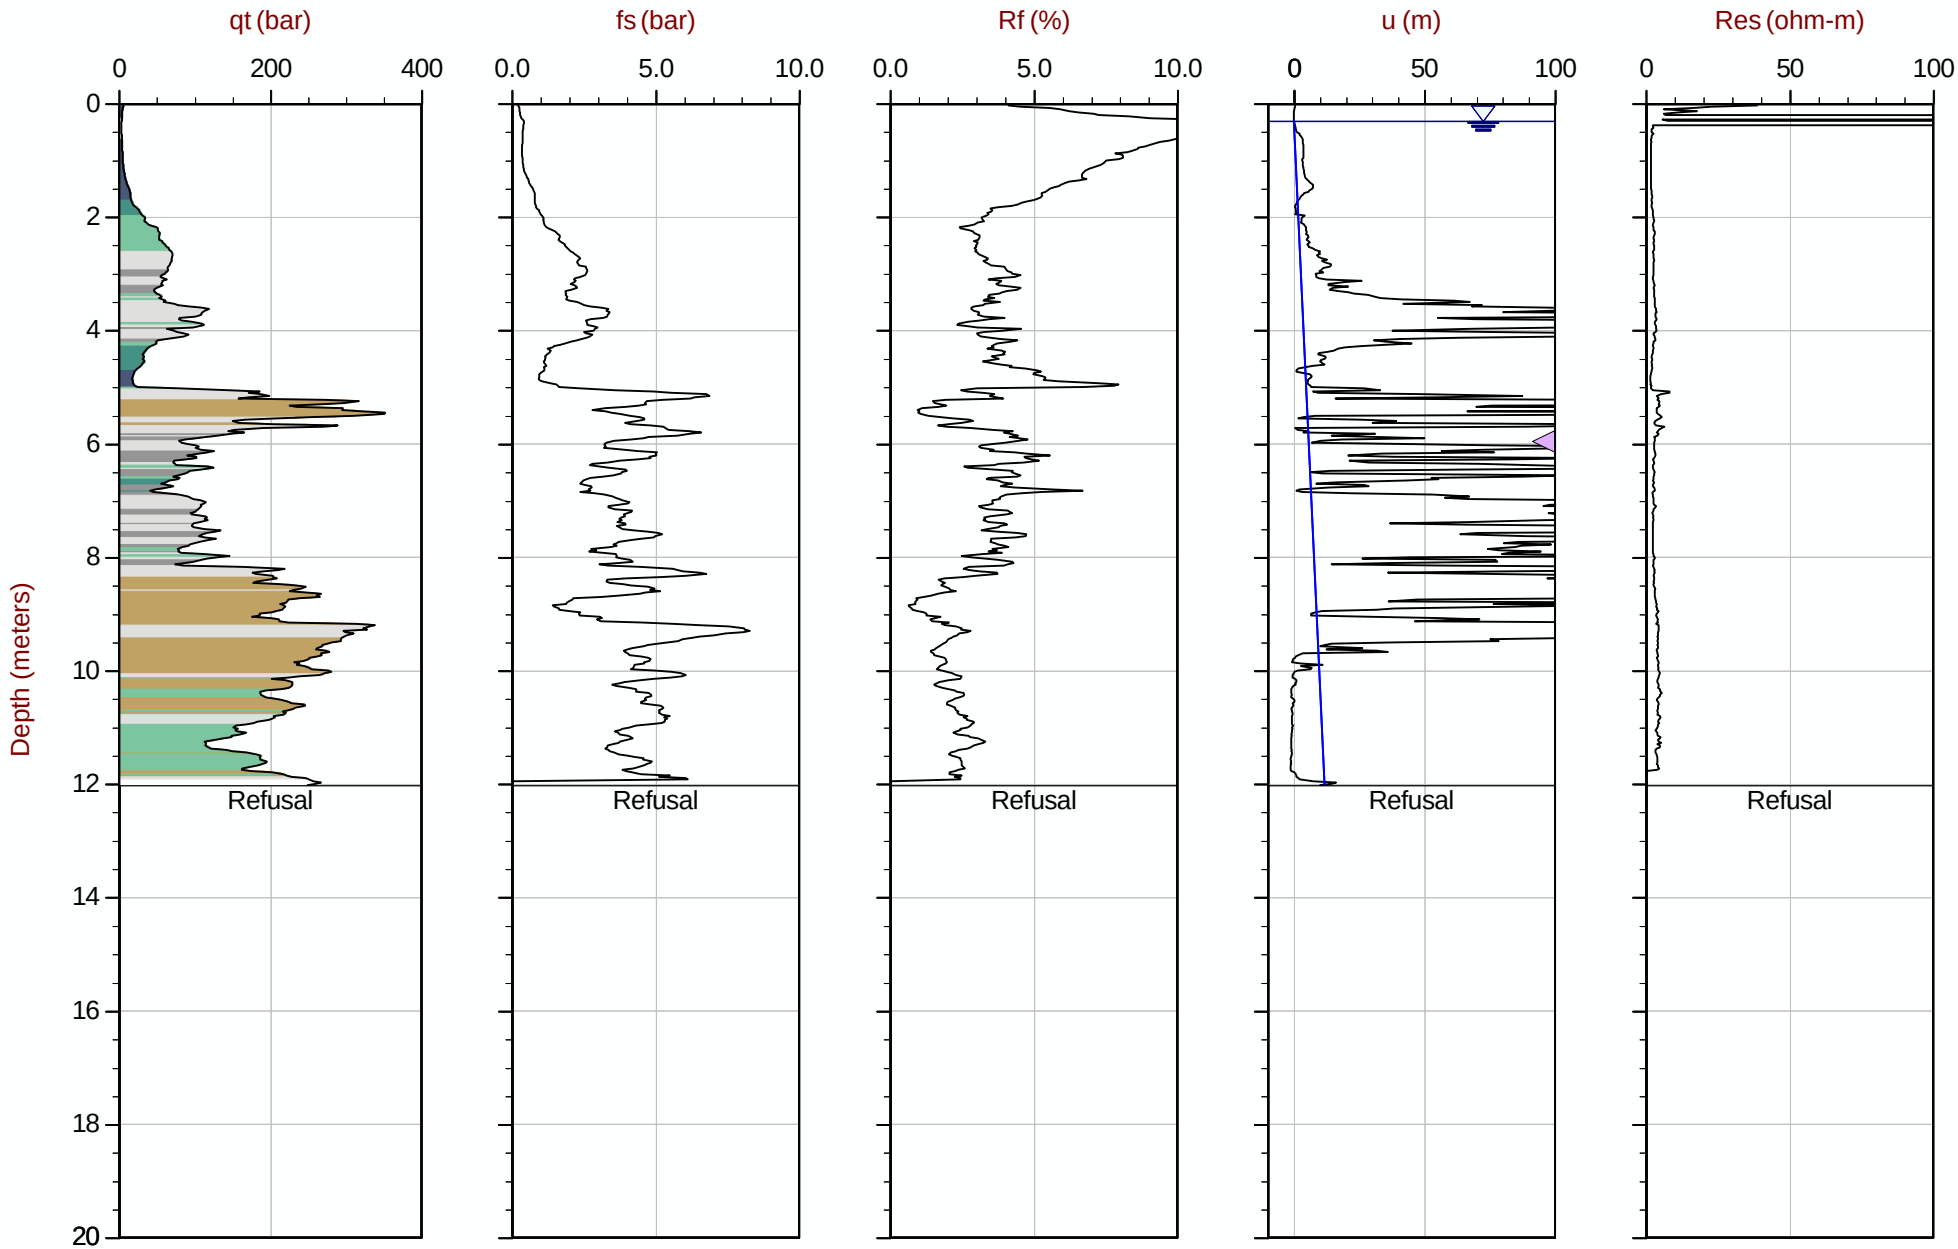

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT123B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612545m E: 415569m Elev: 771.600m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 11:12
Site: Brooks, Alberta

Sounding: RCPT22-22CPT124
Cone: 822:T1000F10U35 Area= 15cm2

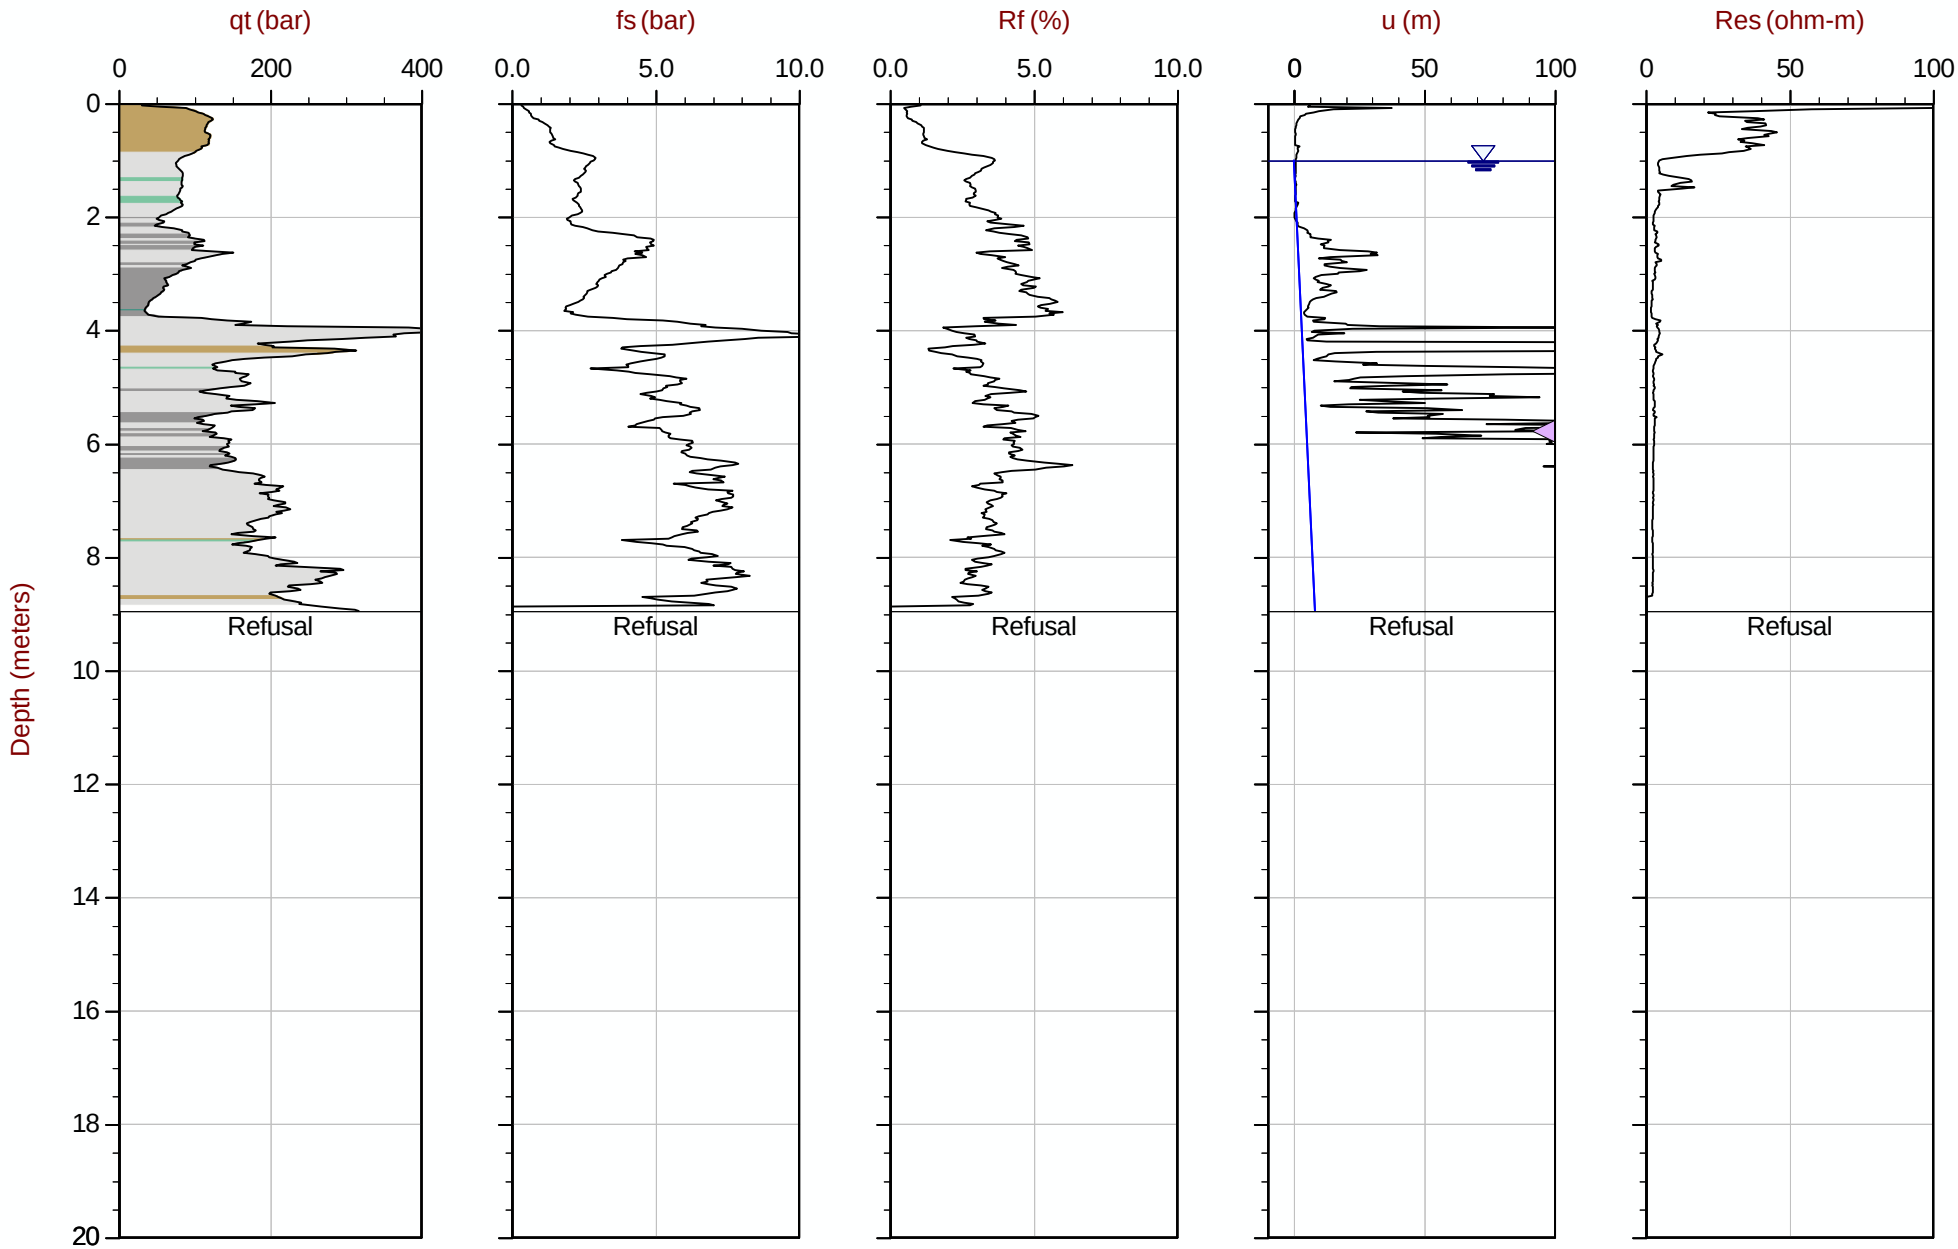

Max Depth: 8.950 m / 29.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT124.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612542m E: 415620m Elev: 770.903m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 10:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT125
Cone: 822:T1000F10U35 Area= 15cm2

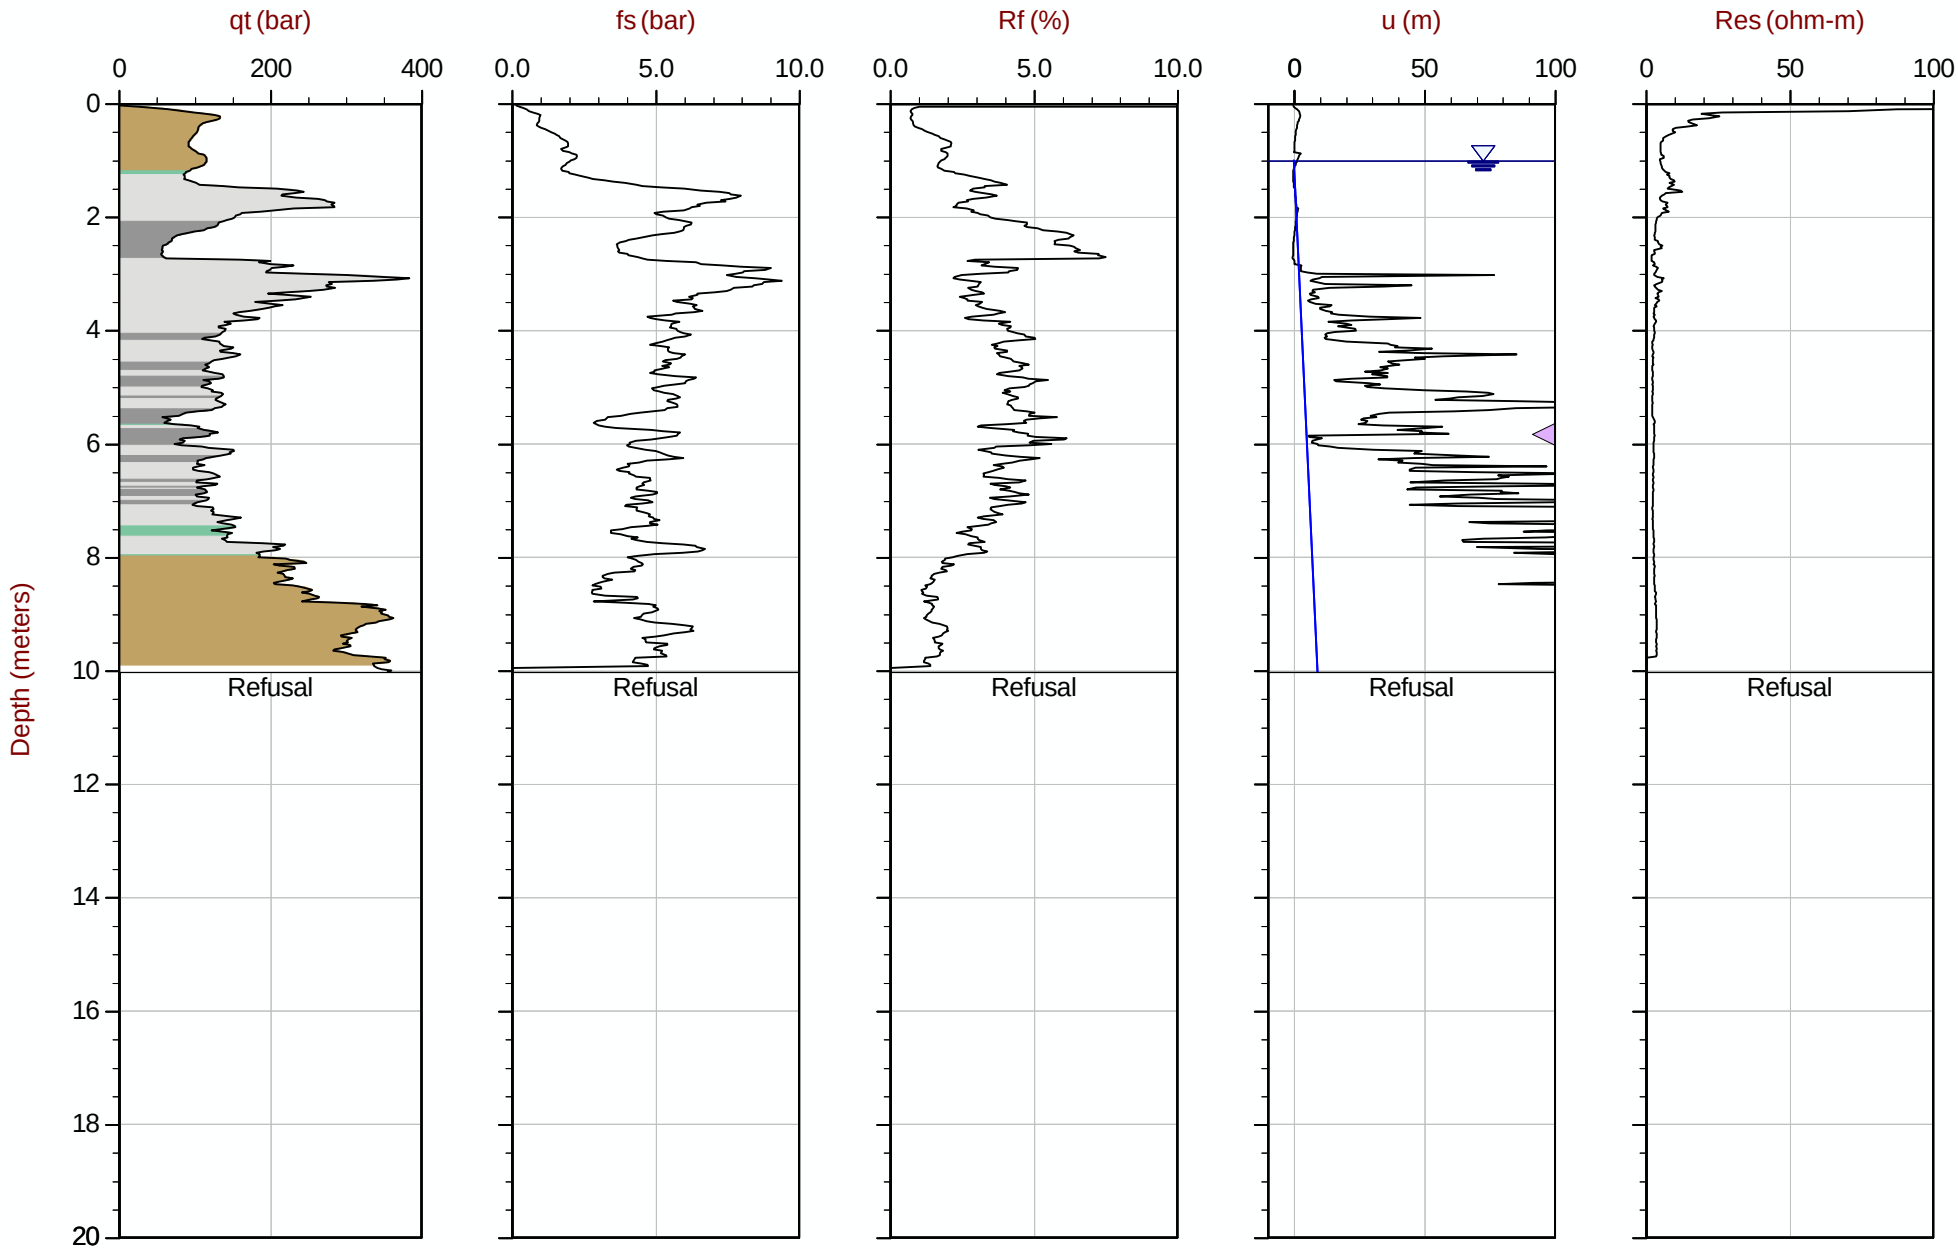

Max Depth: 10.025 m / 32.89 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT125.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612540m E: 415671m Elev: 770.690m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 12:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT126
Cone: 750:T1500F15U35 Area= 15cm2

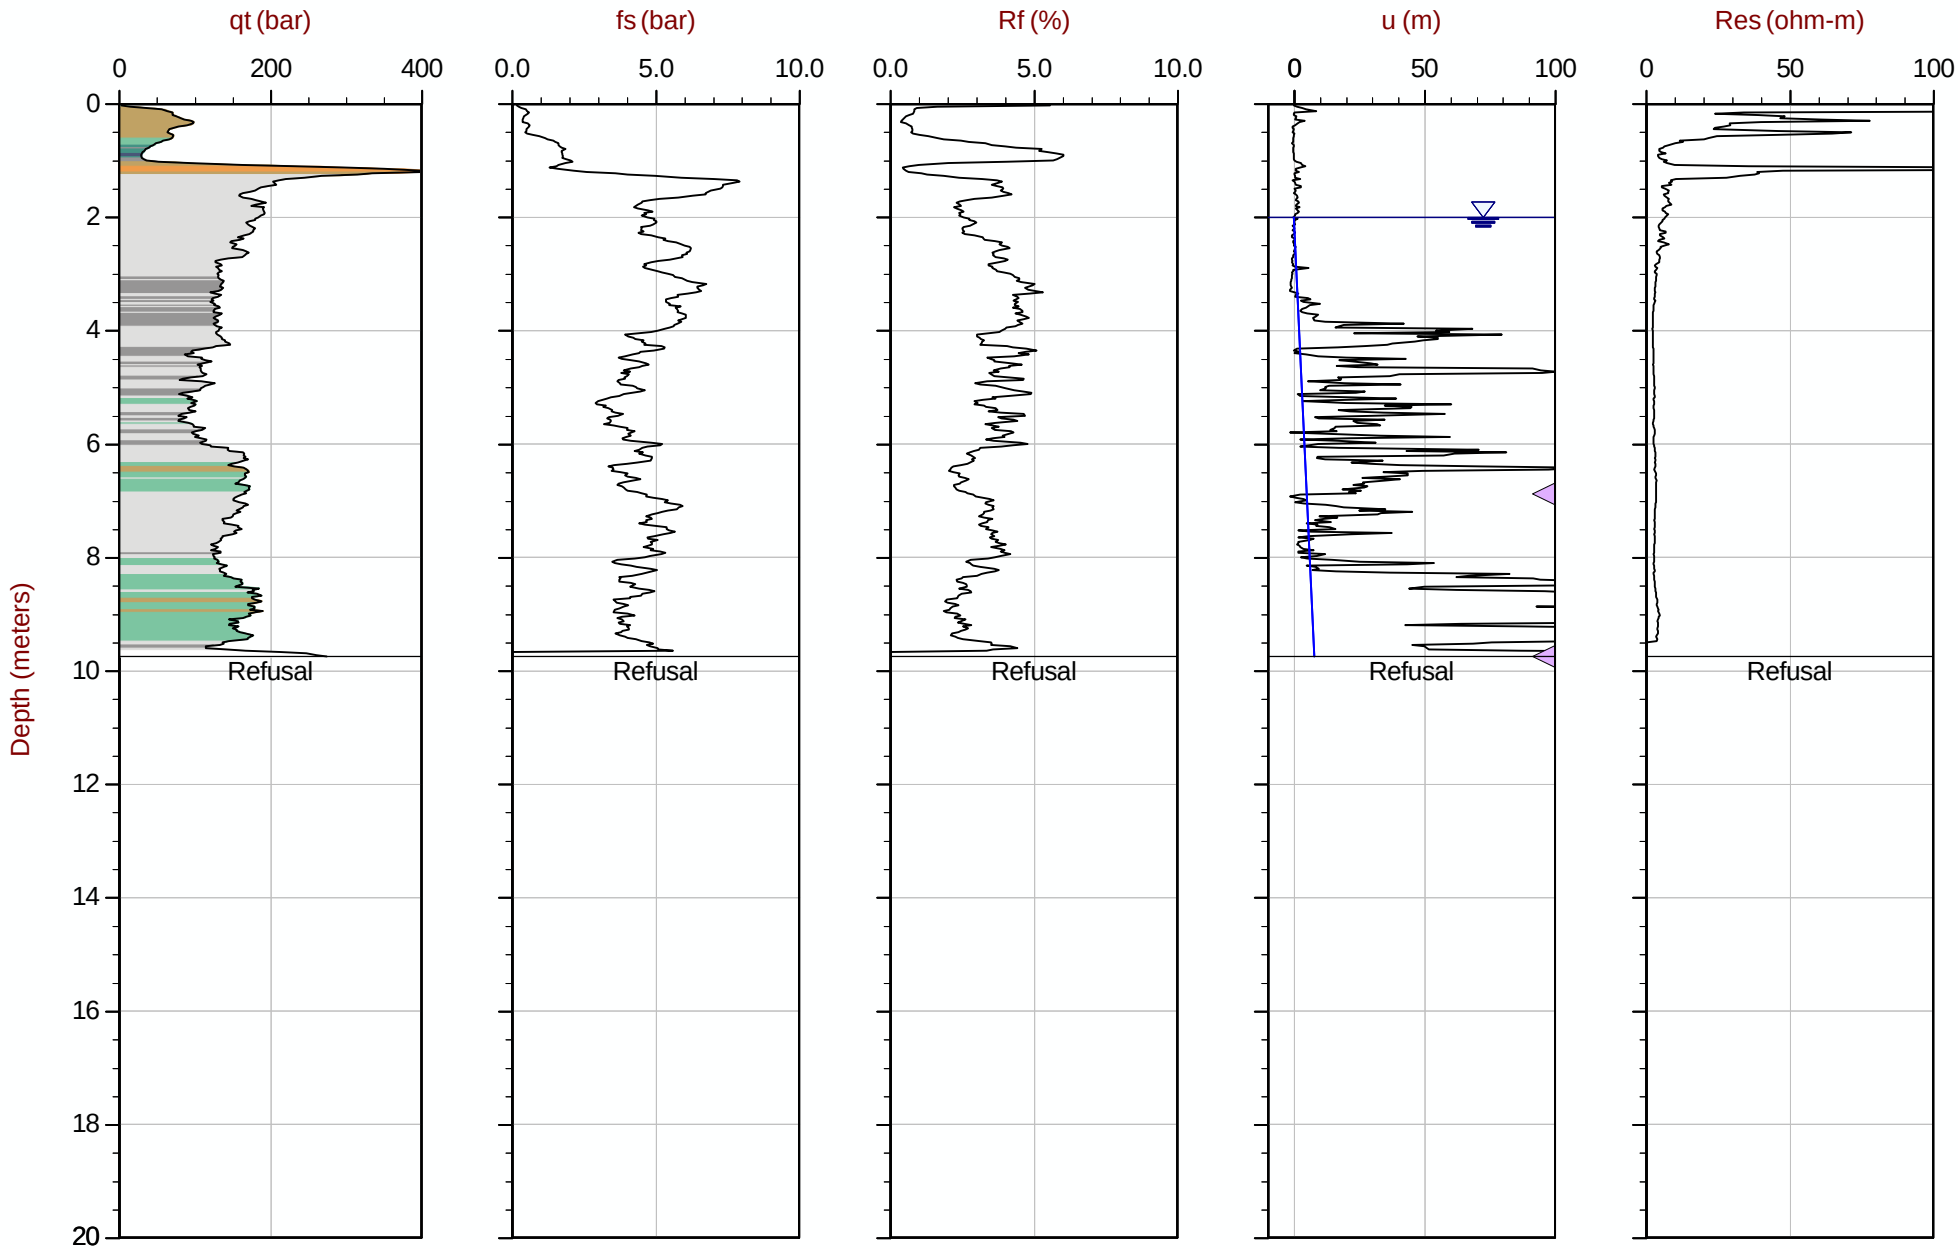

Max Depth: 9.750 m / 31.99 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT126.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612538m E: 415720m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 11:19
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT127
Cone: 750:T1500F15U35 Area= 15cm2

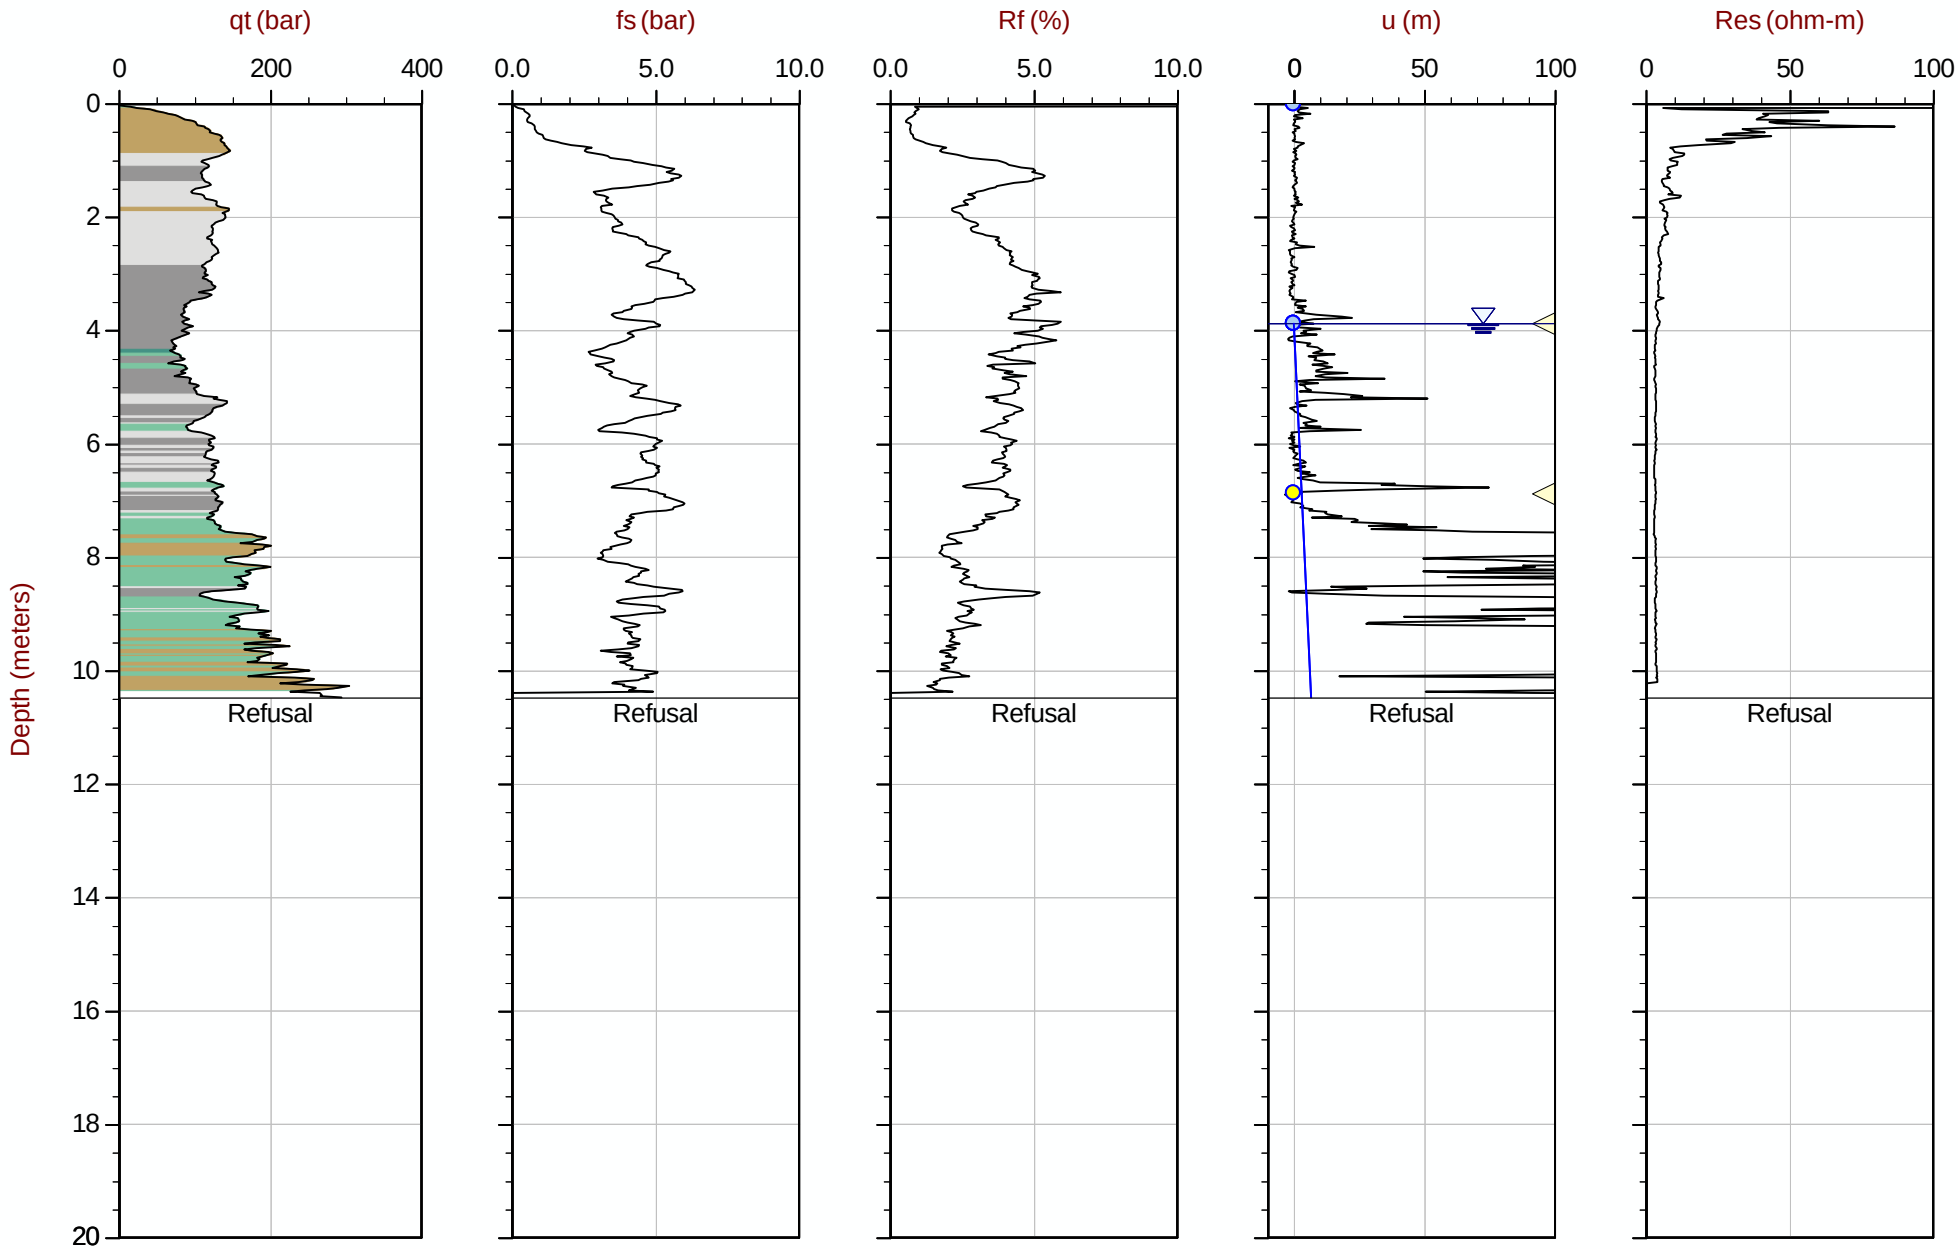

Max Depth: 10.475 m / 34.37 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT127.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612537m E: 415770m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 09:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT128
Cone: 750:T1500F15U35 Area= 15cm2

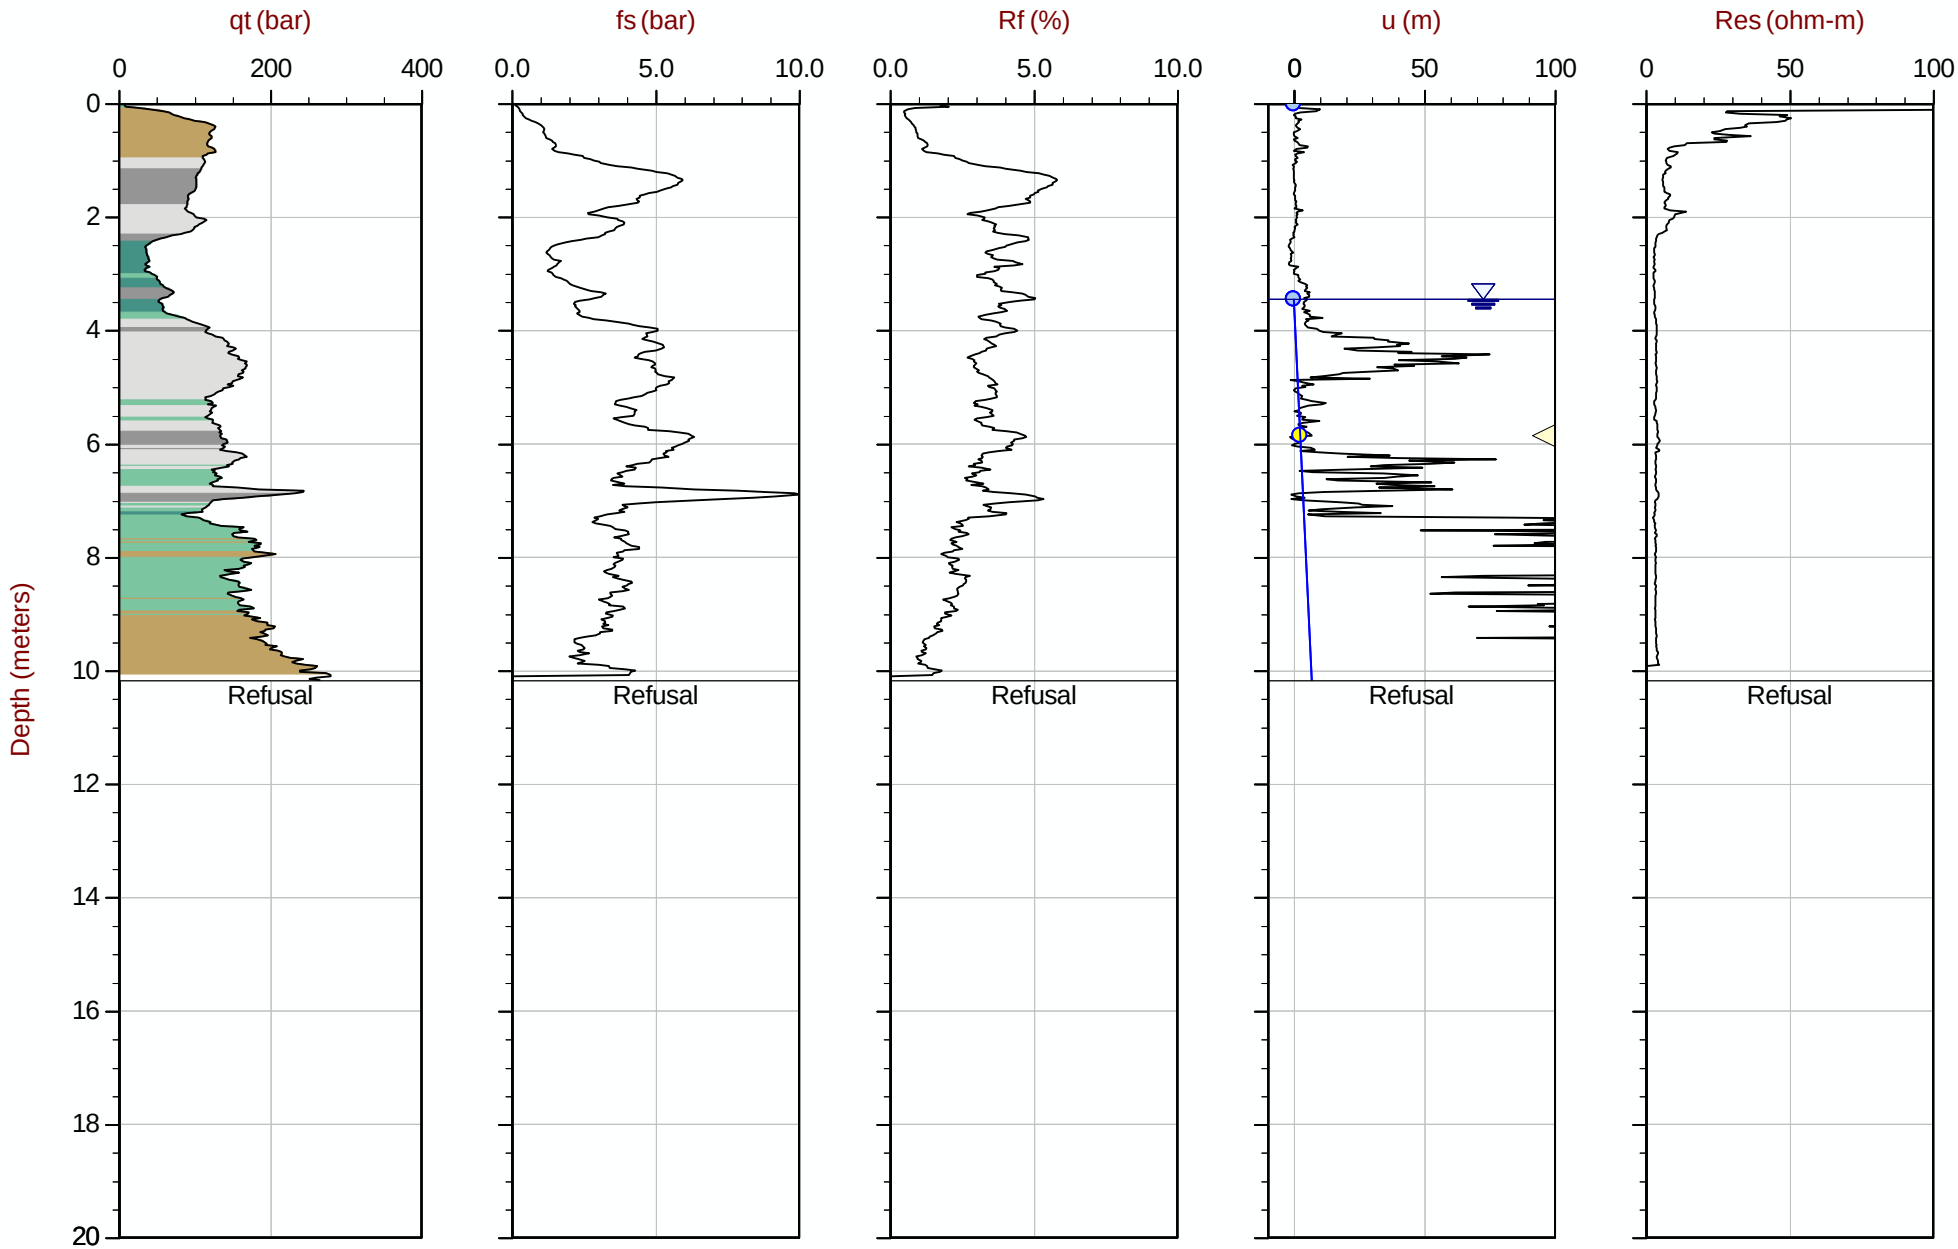

Max Depth: 10.175 m / 33.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT128.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612536m E: 415820m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 08:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129
Cone: 821:T1000F10U35 Area= 15cm2

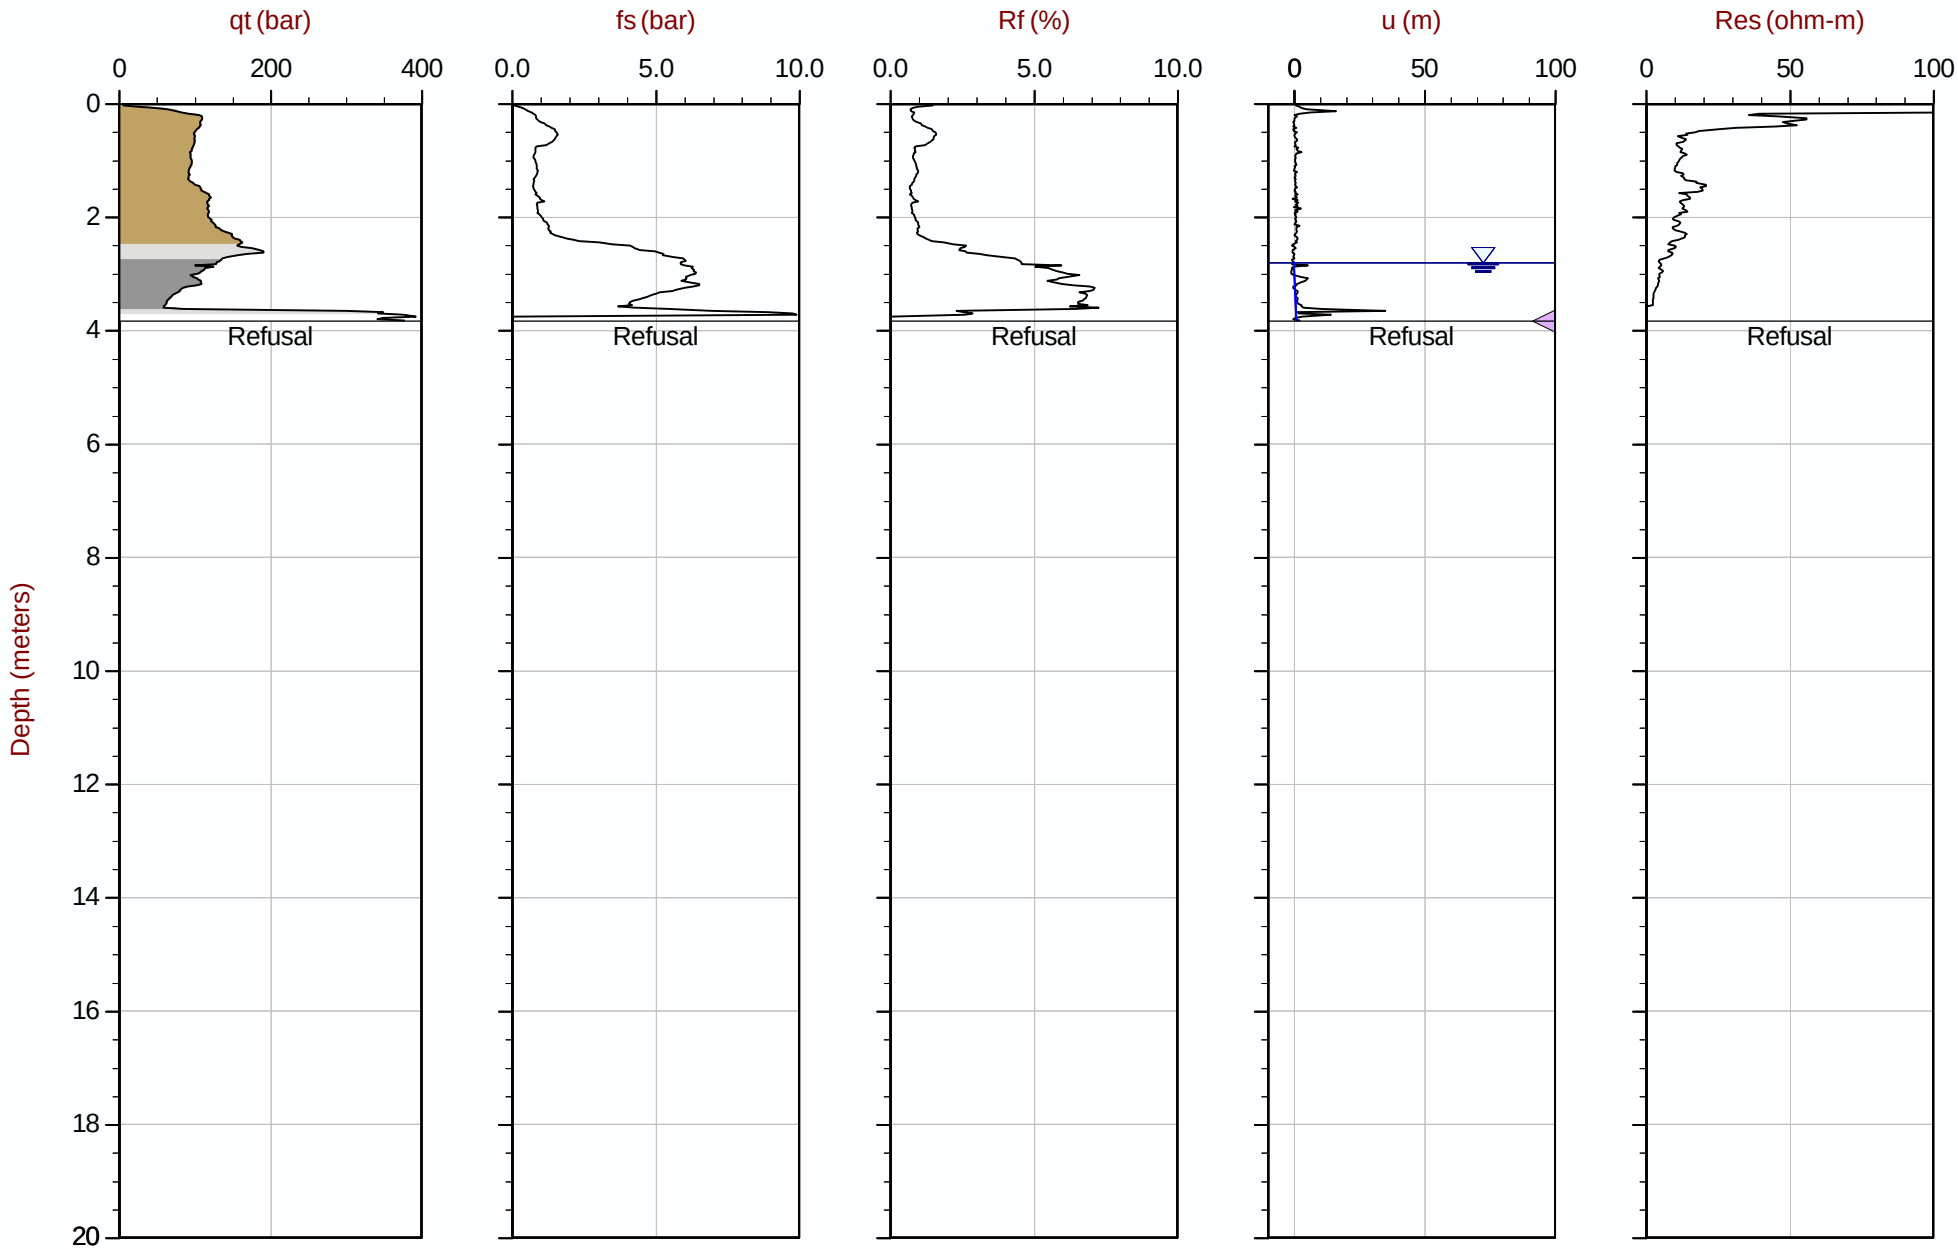

Max Depth: 3.825 m / 12.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT129.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612534m E: 415870m Elev: 769.474m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 08:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129B
Cone: 821:T1000F10U35 Area= 15cm2

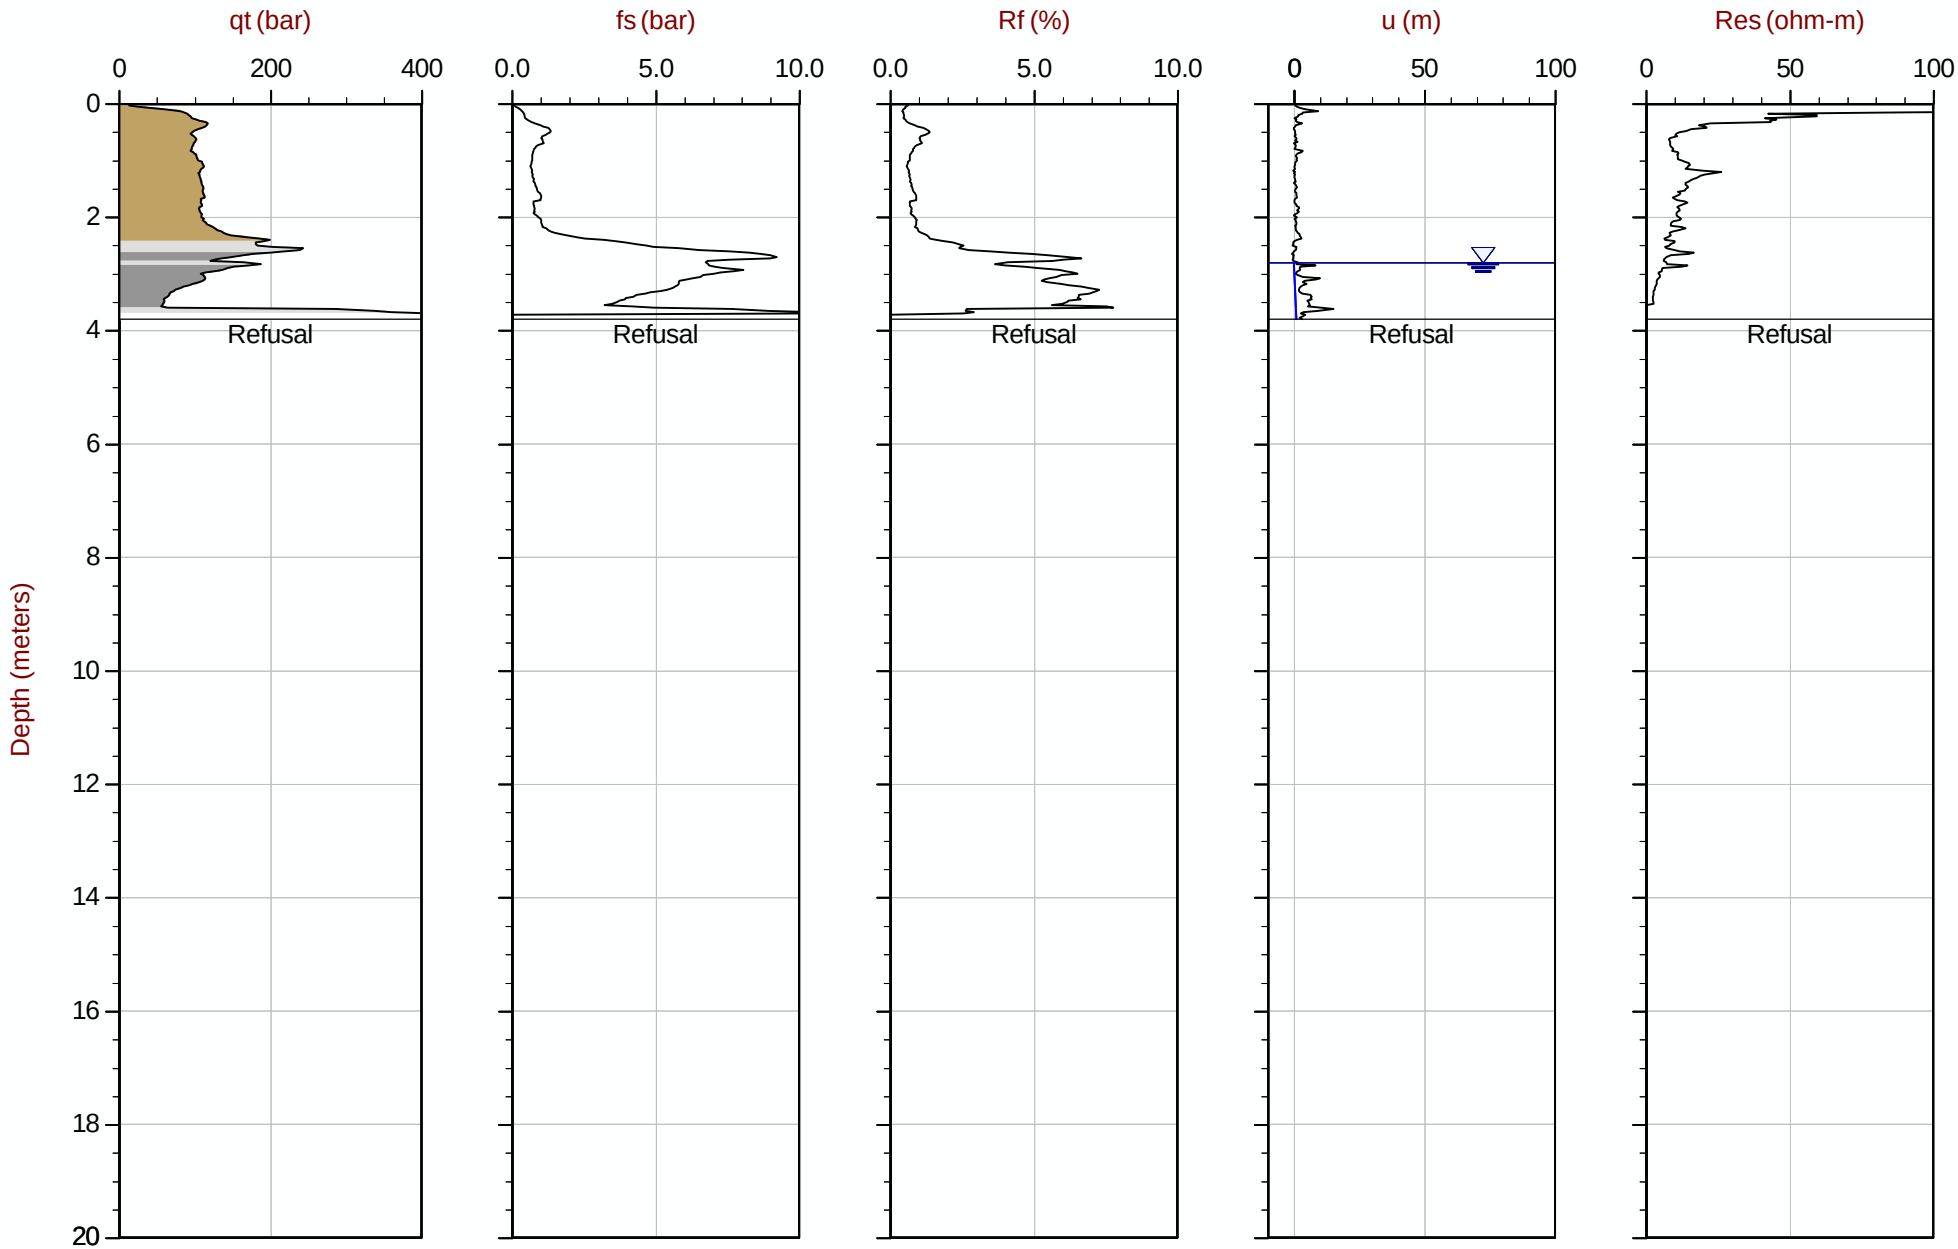

Max Depth: 3.800 m / 12.47 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT129B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612534m E: 415868m Elev: 769.500m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 09:28
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129C
Cone: 822:T1000F10U35 Area= 15cm2

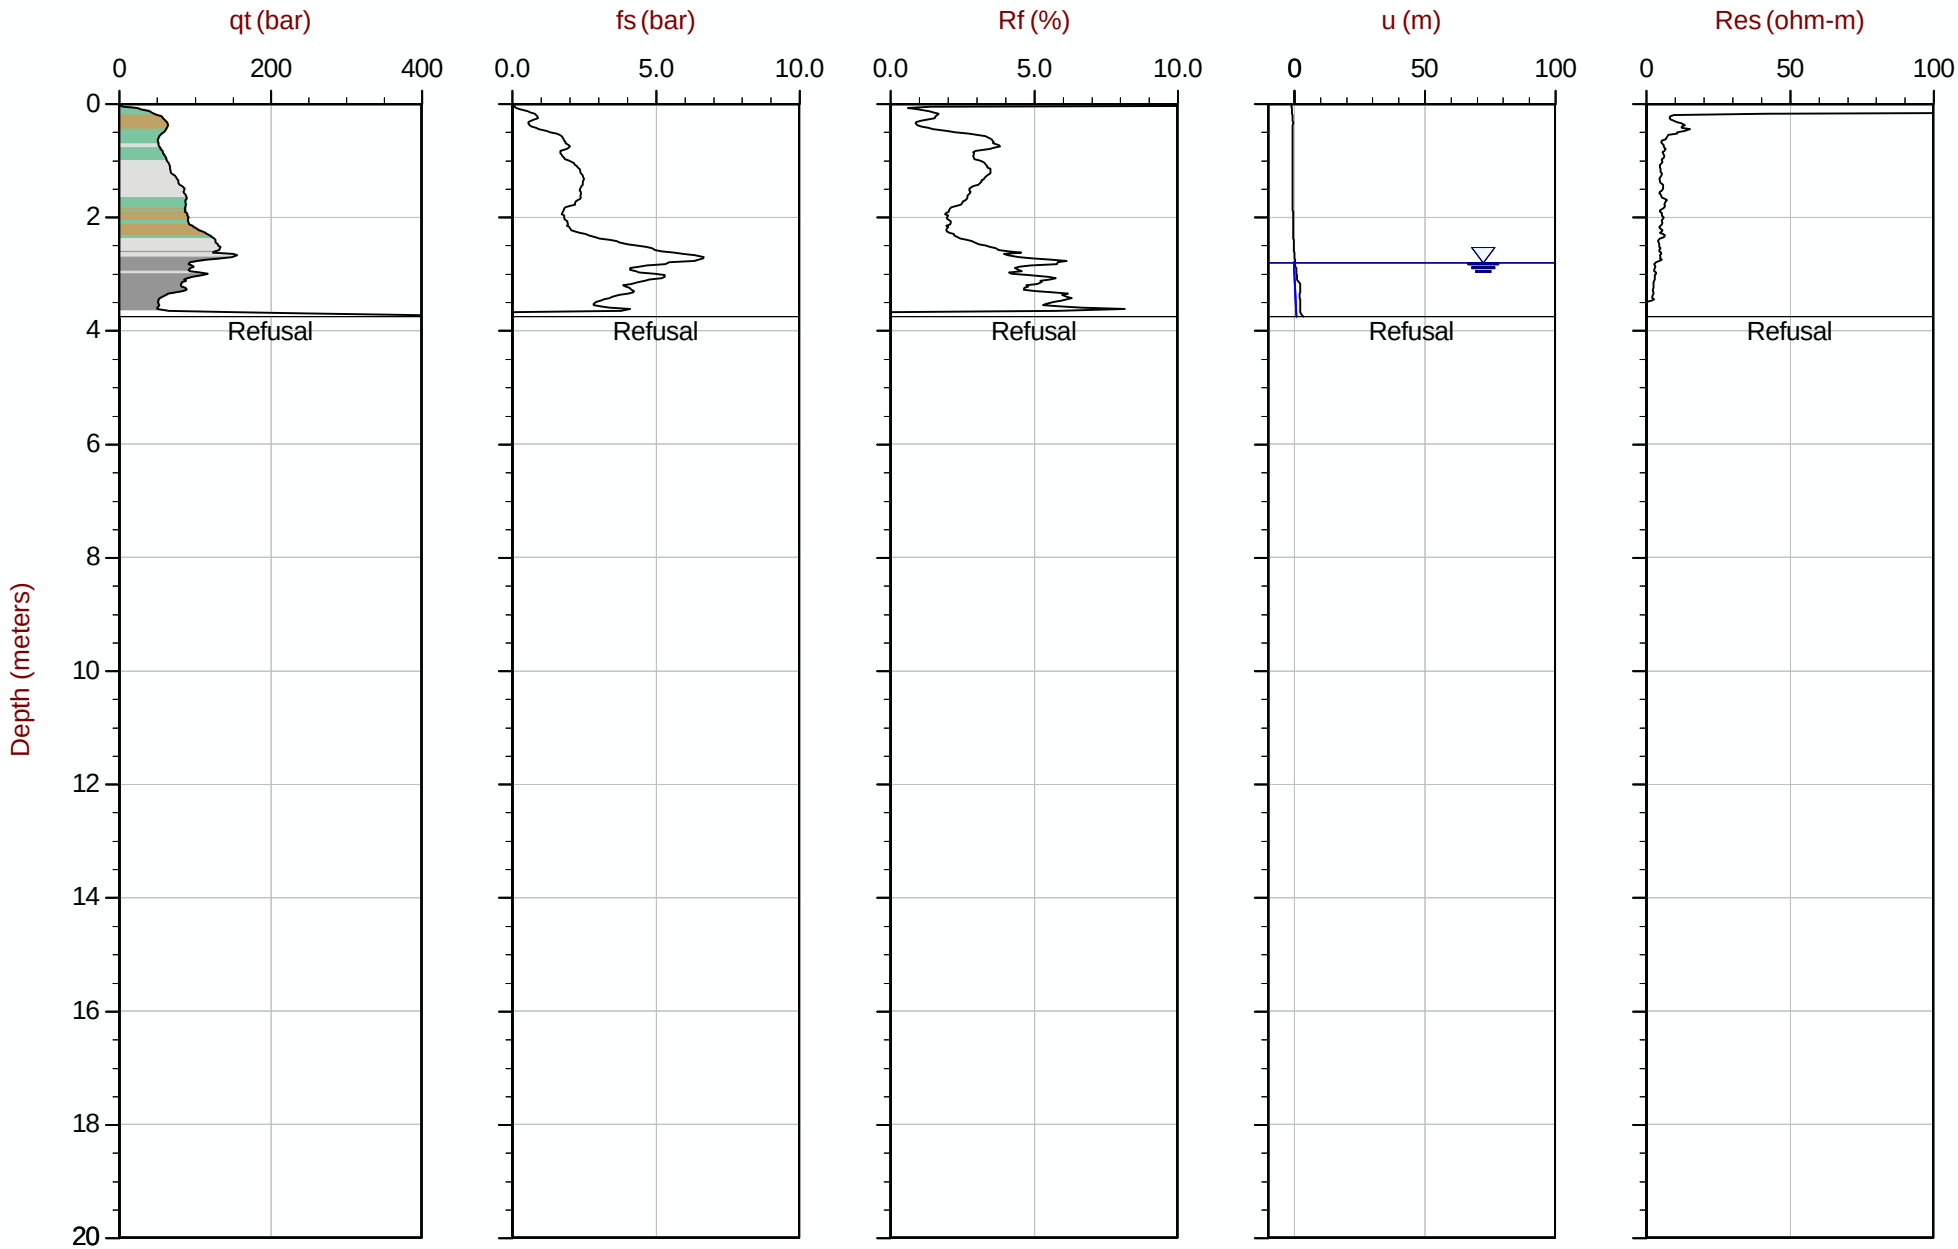

Max Depth: 3.750 m / 12.30 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT129C.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612534m E: 415868m Elev: 769.500m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 16:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT130
Cone: 821:T1000F10U35 Area= 15cm2

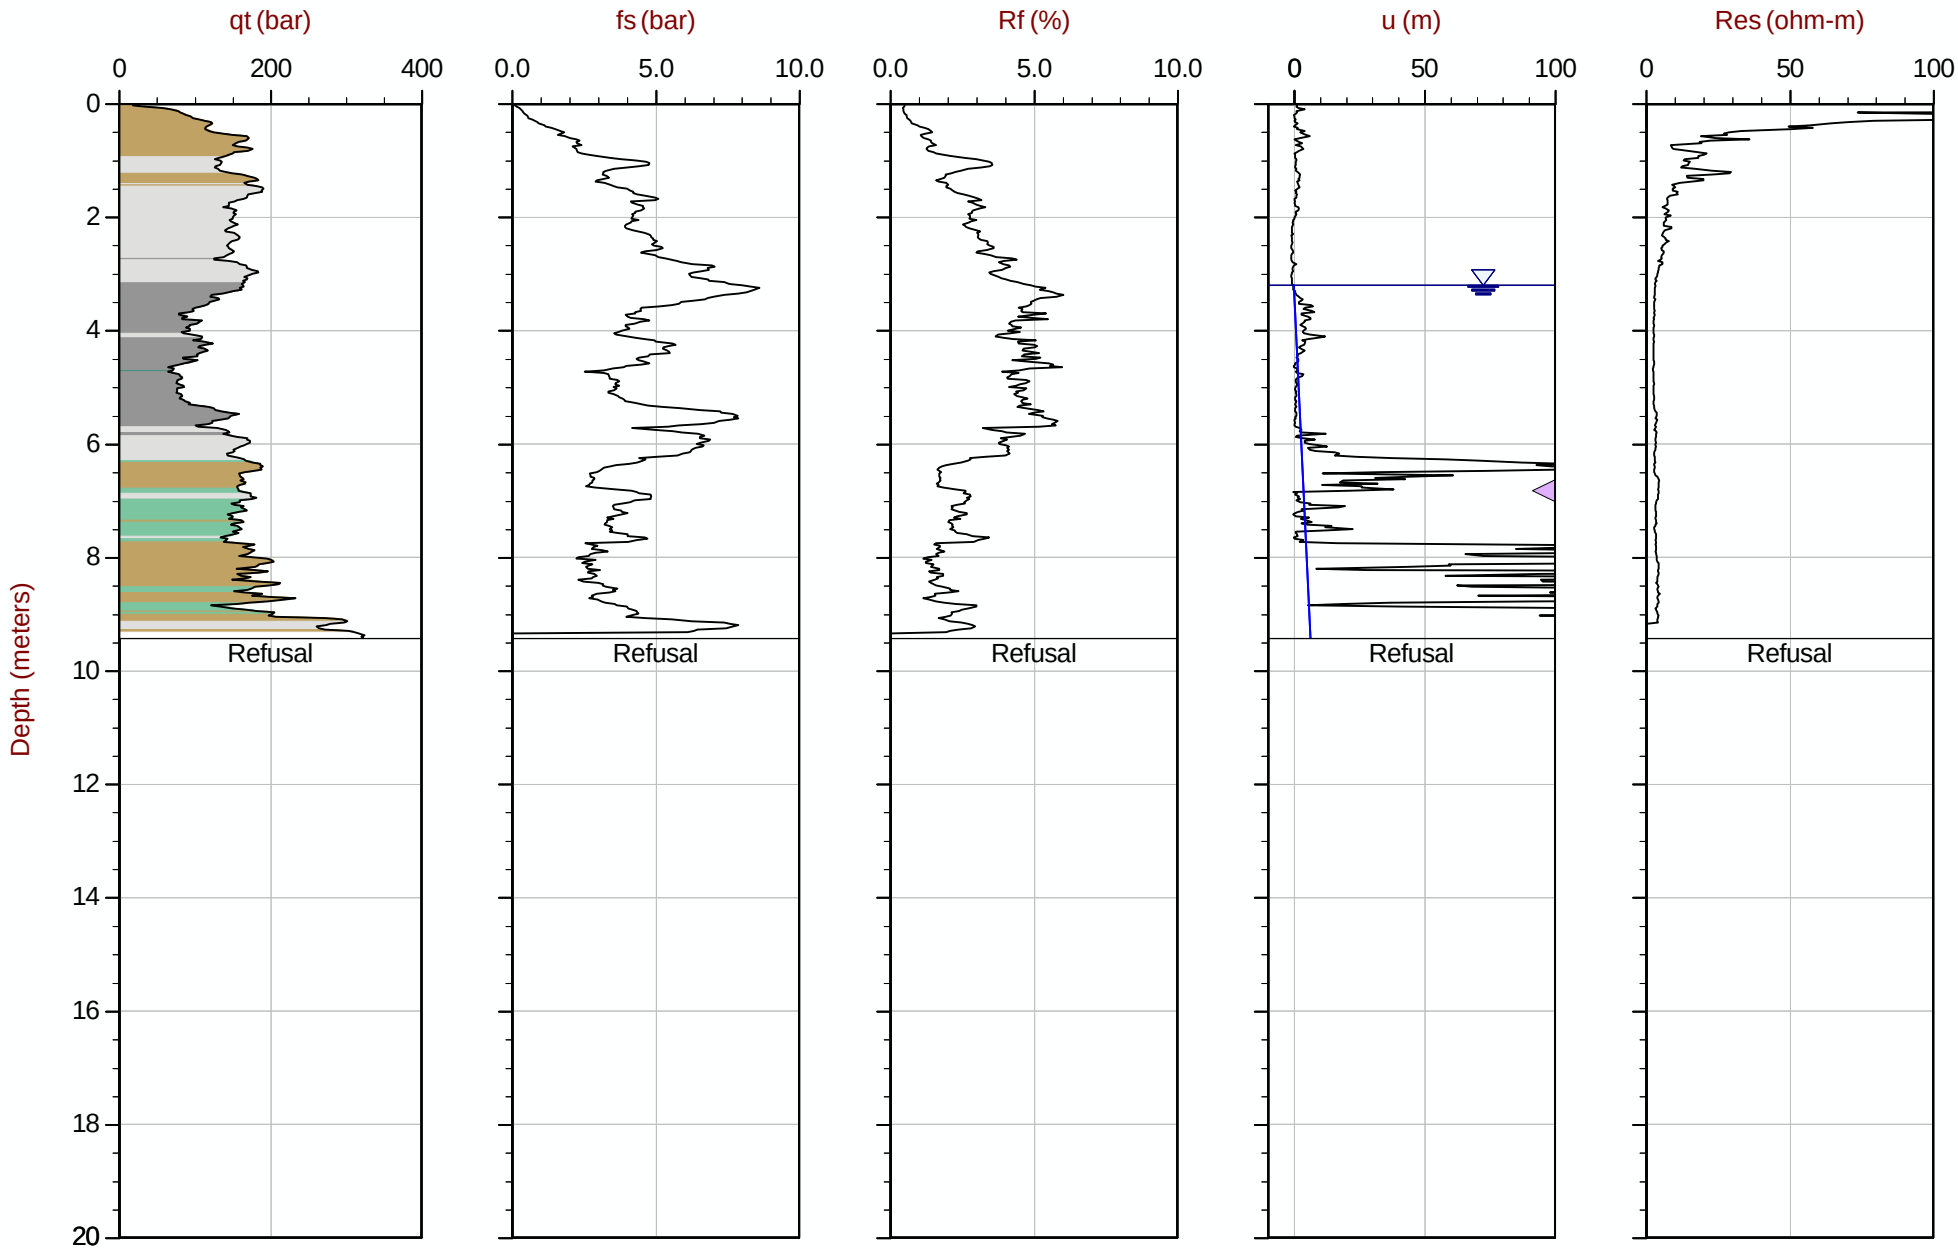

Max Depth: 9.425 m / 30.92 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT130.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612533m E: 415920m Elev: 769.325m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 14:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT131
Cone: 750:T1500F15U35 Area= 15cm2

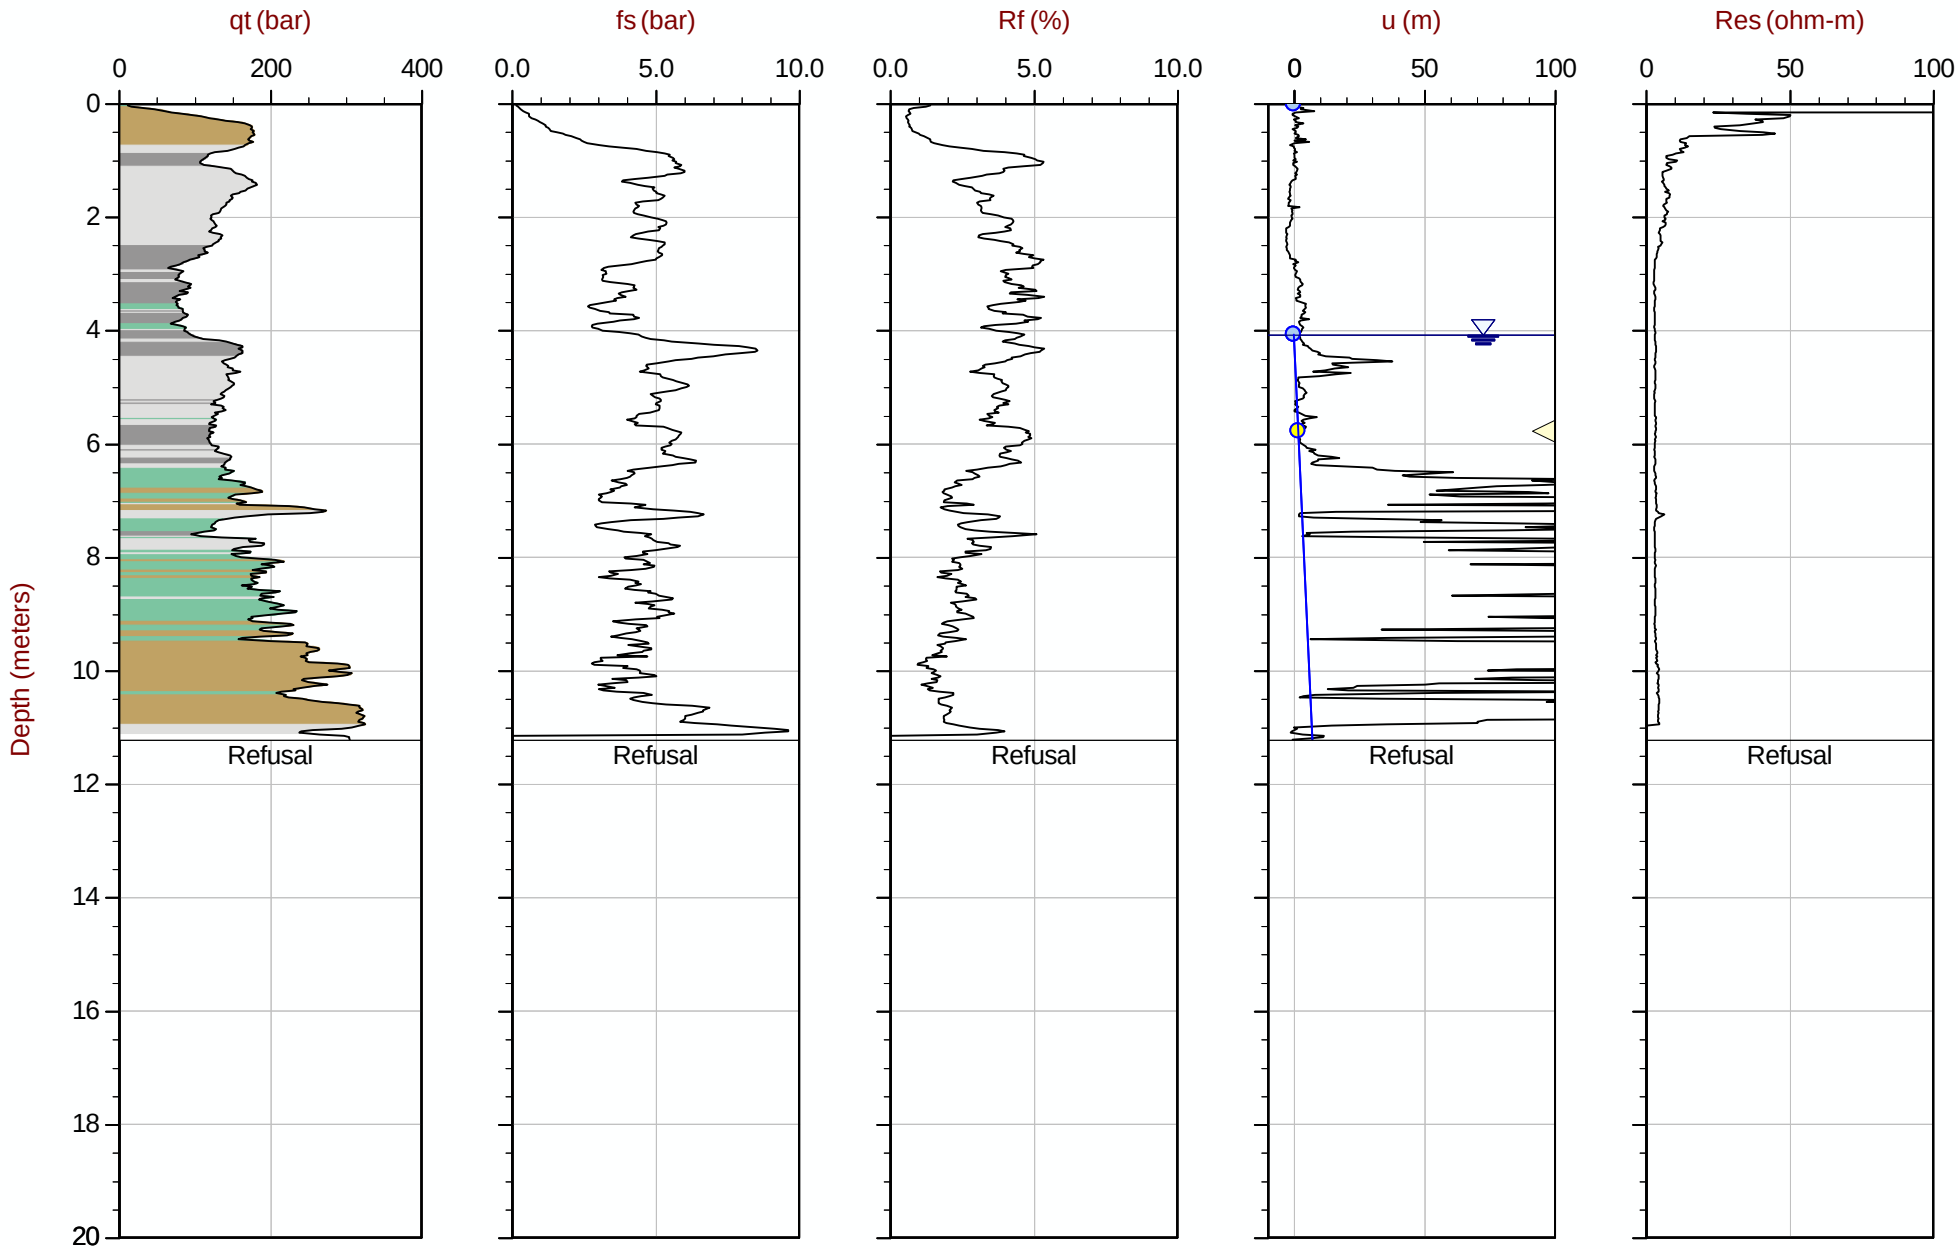

Max Depth: 11.225 m / 36.83 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT131.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612532m E: 415967m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 11:02
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131E
Cone: 822:T1000F10U35 Area= 15cm2

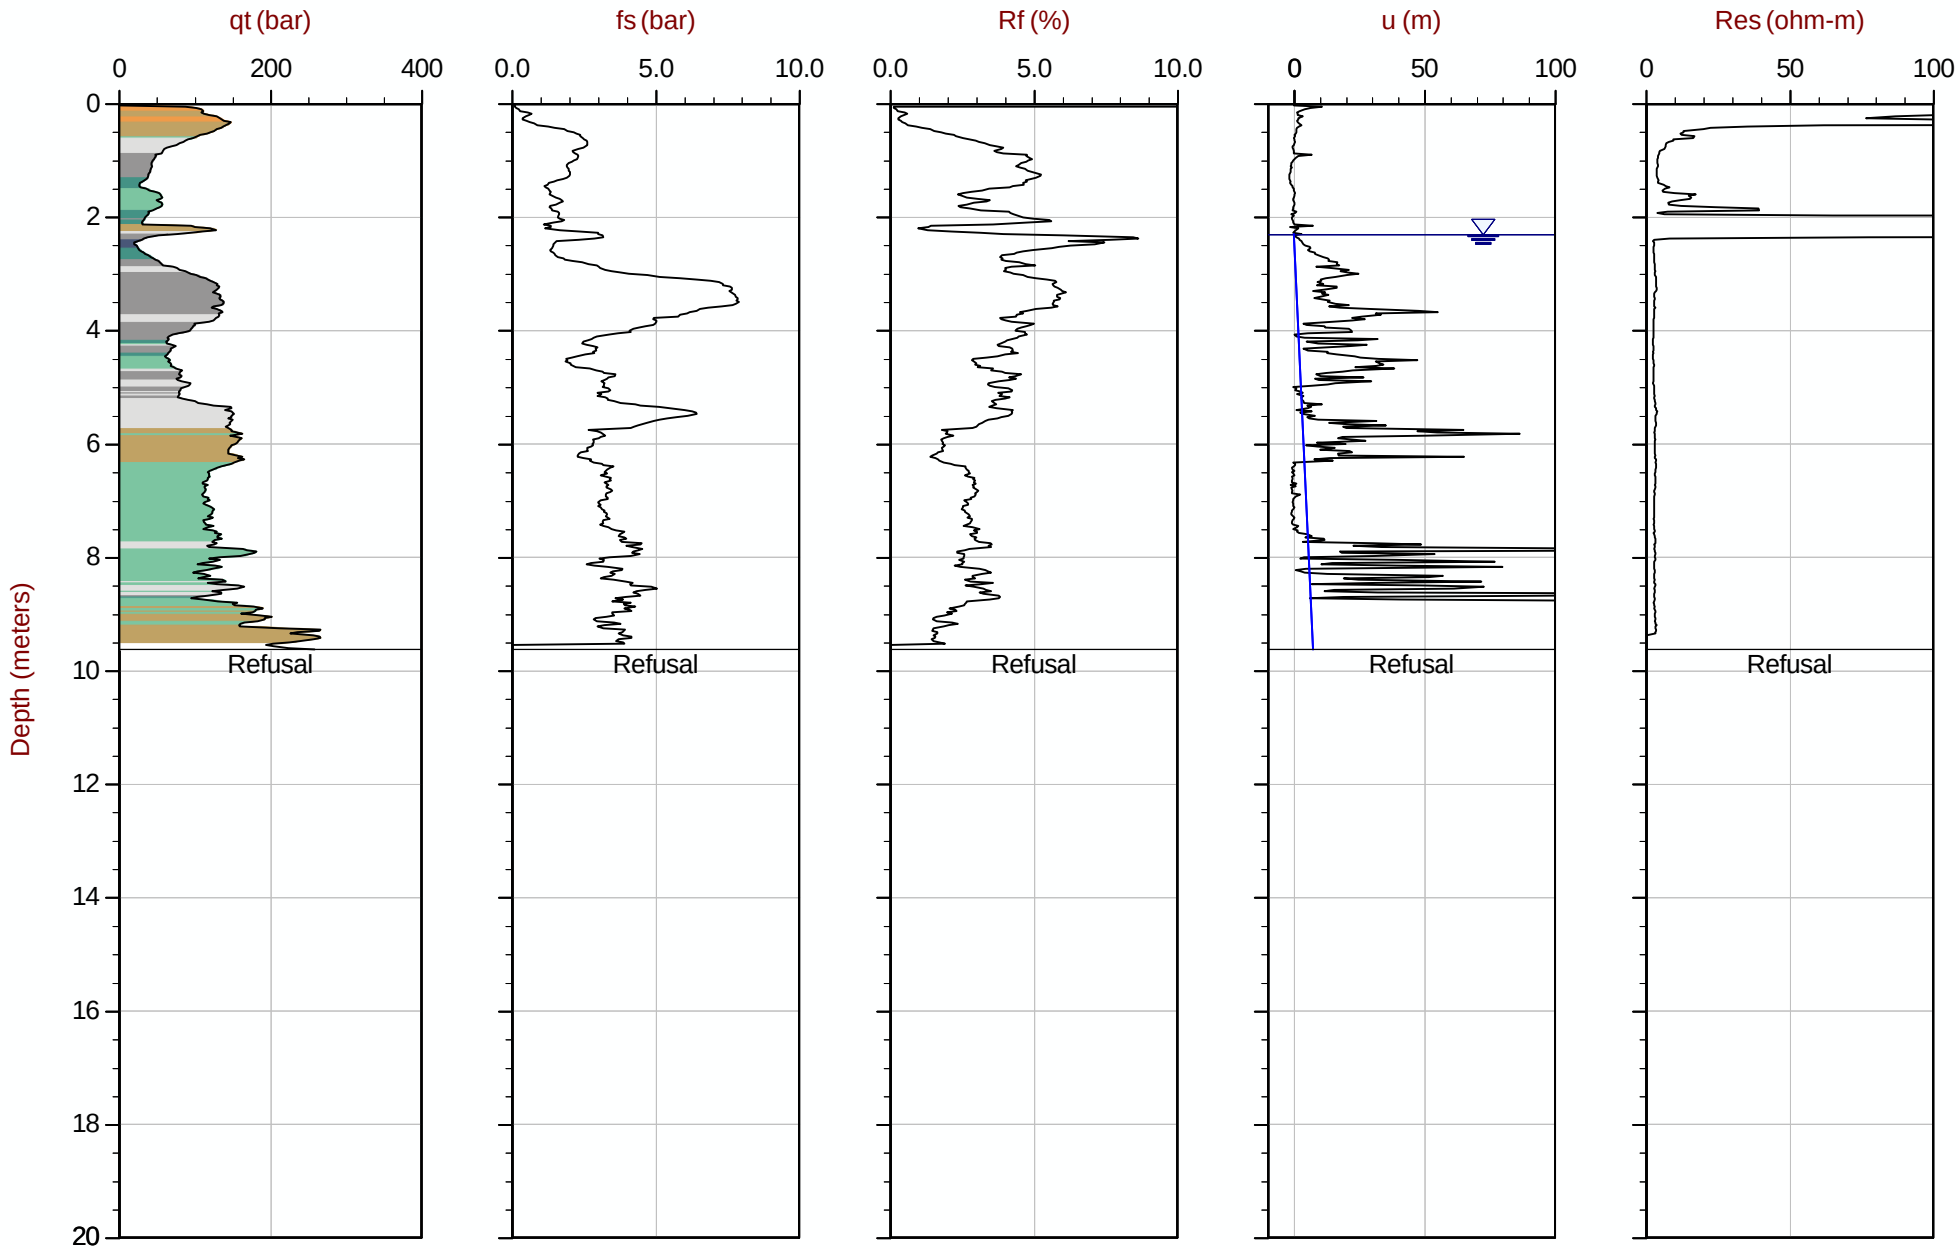

Max Depth: 9.625 m / 31.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131E.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612505m E: 416389m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 09:17
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131N
Cone: 822:T1000F10U35 Area= 15cm2

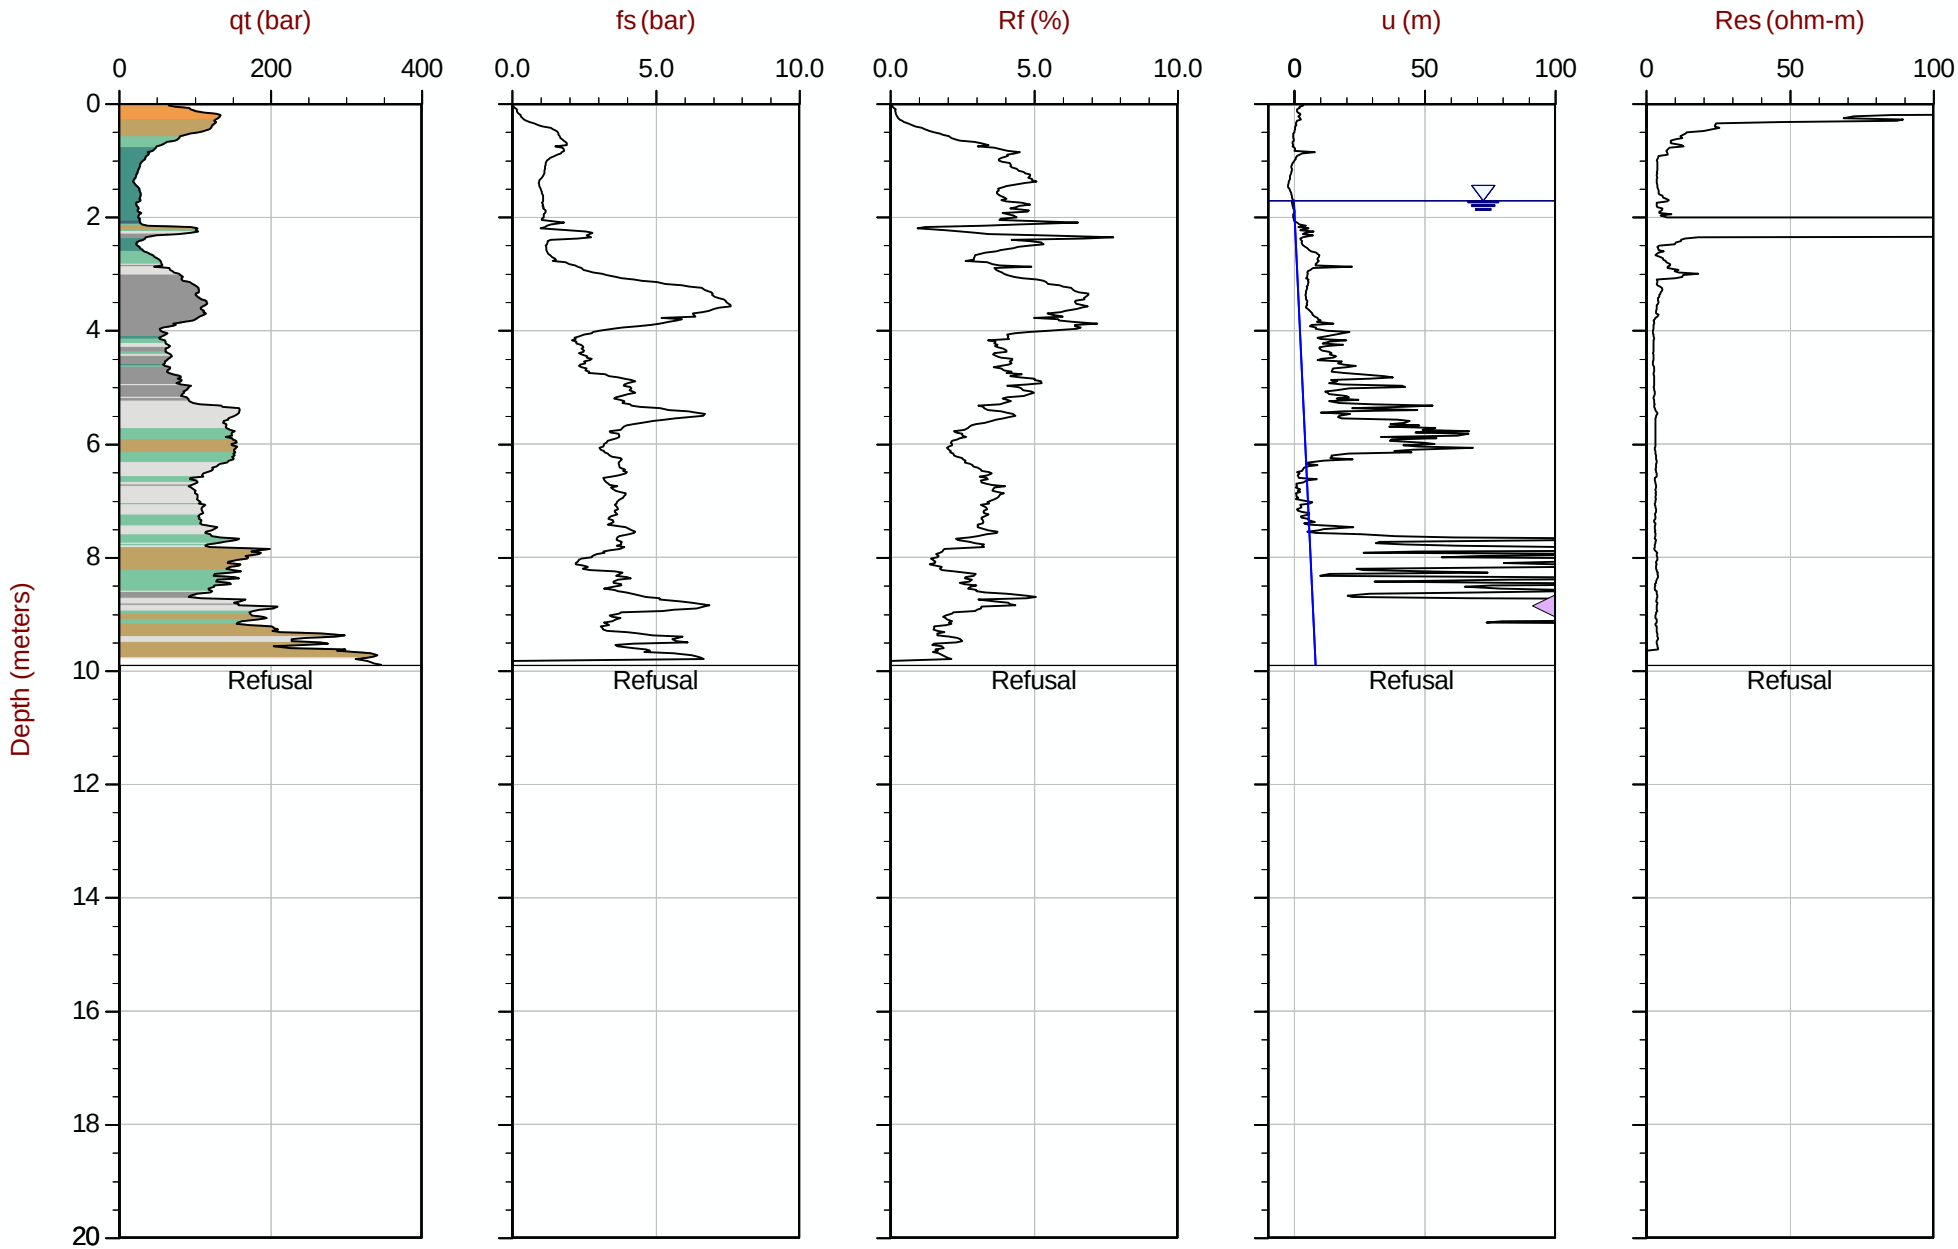

Max Depth: 9.900 m / 32.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131N.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612506m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 11:46
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131S1
Cone: 822:T1000F10U35 Area= 15cm2

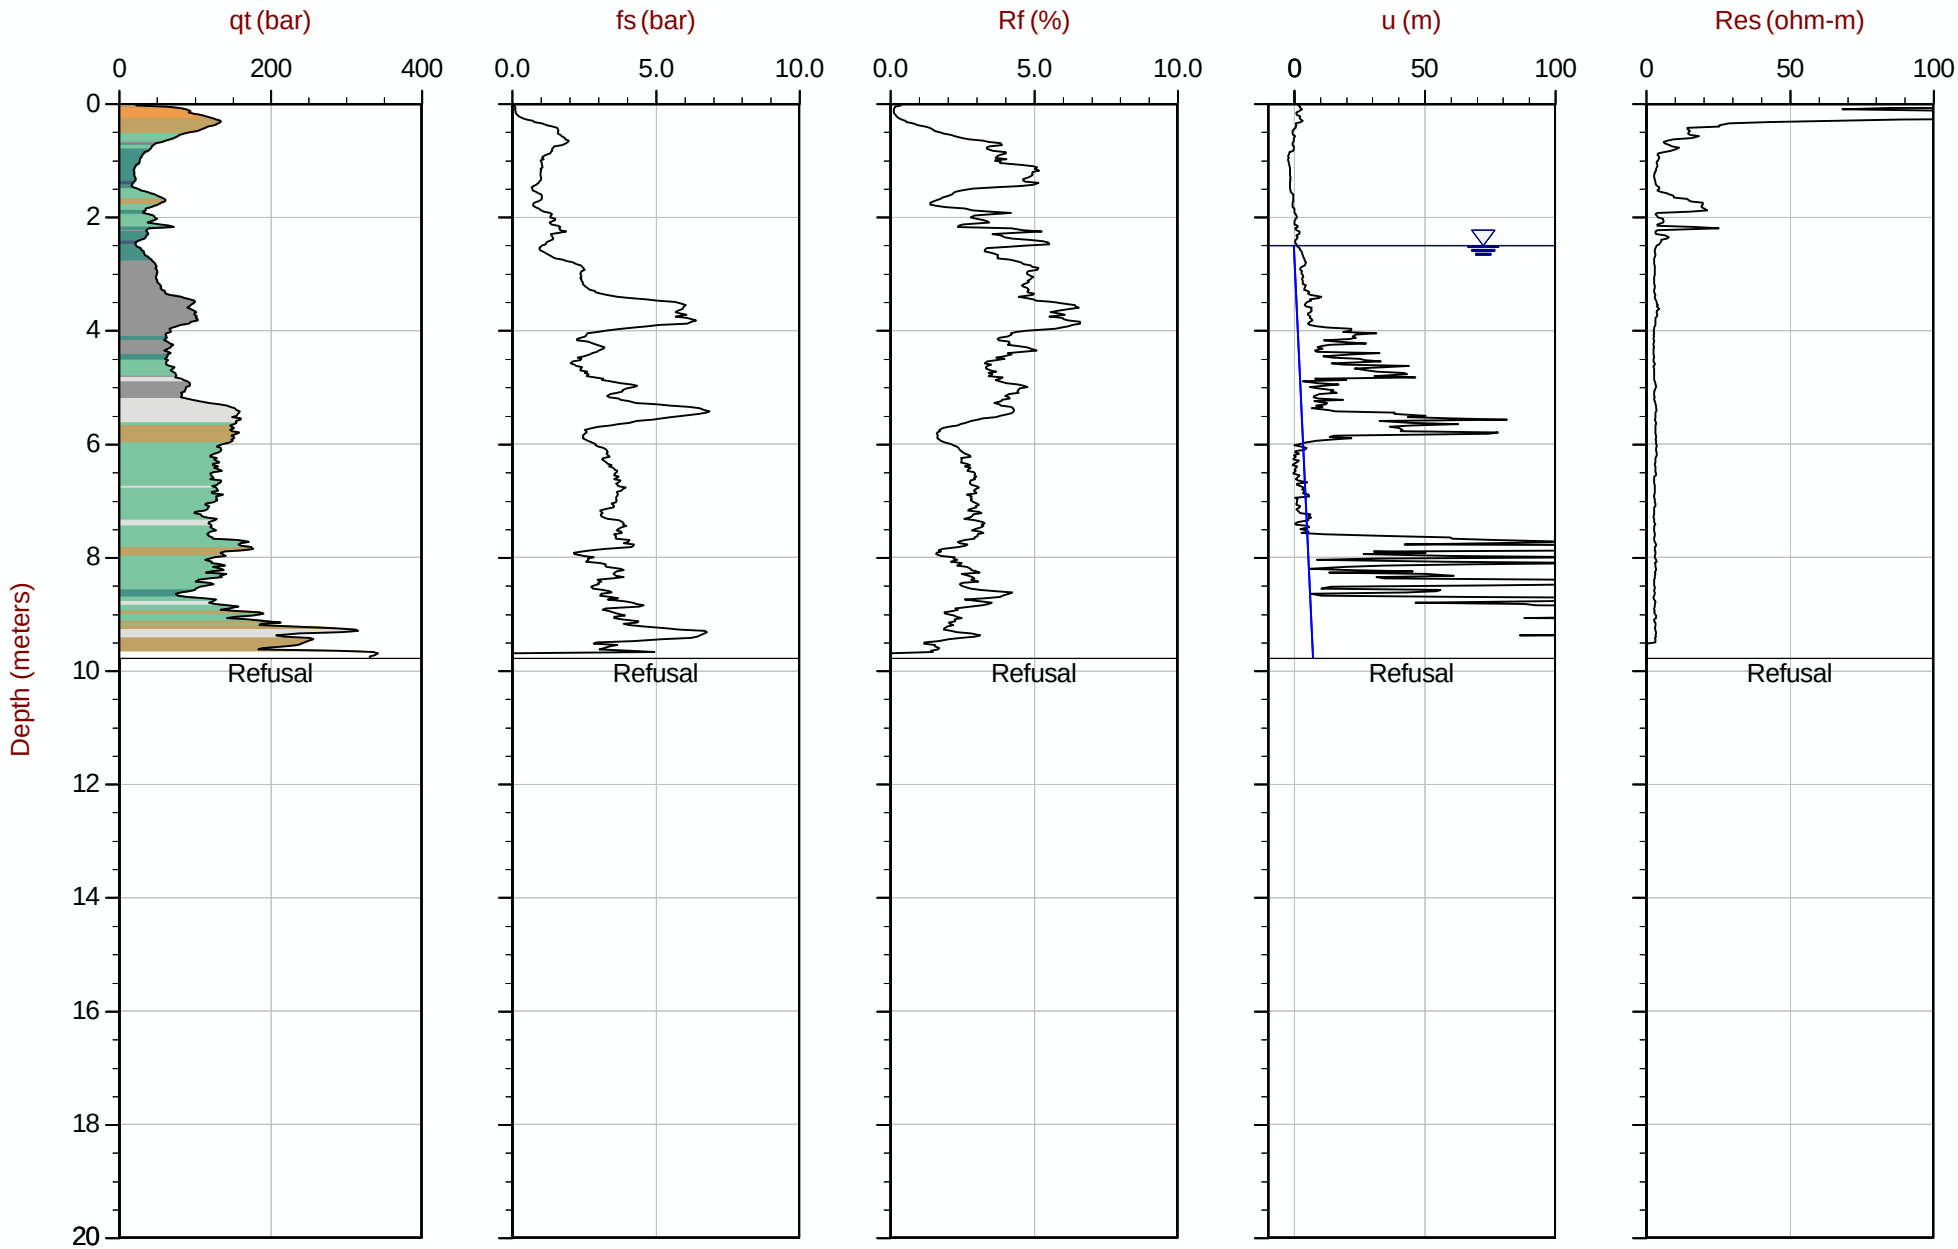

Max Depth: 9.775 m / 32.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131S1.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612504m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 10:23
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131S2
Cone: 822:T1000F10U35 Area= 15cm2

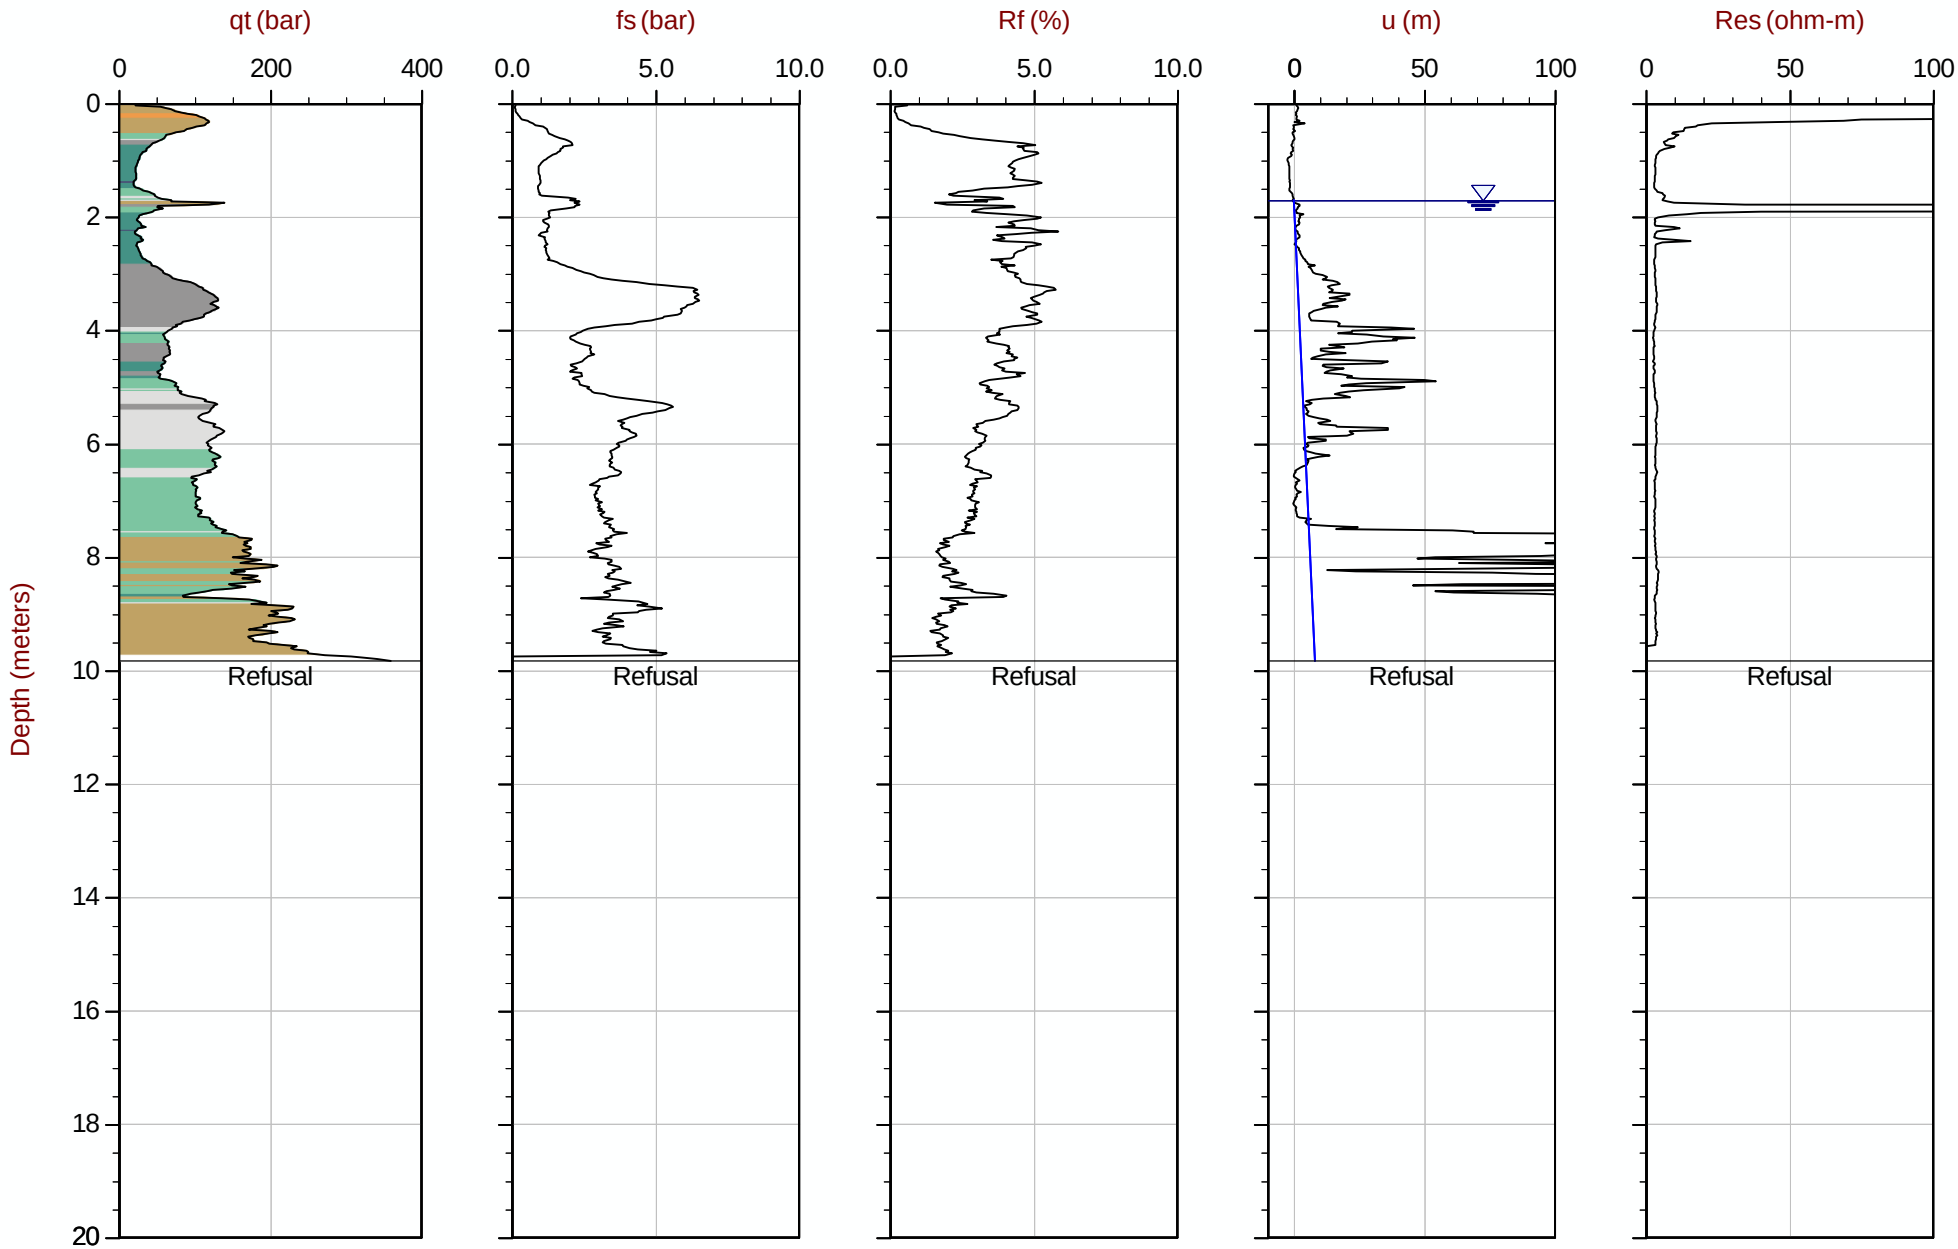

Max Depth: 9.825 m / 32.23 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131S2.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612500m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 16:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT132
Cone: 750:T1500F15U35 Area= 15cm2

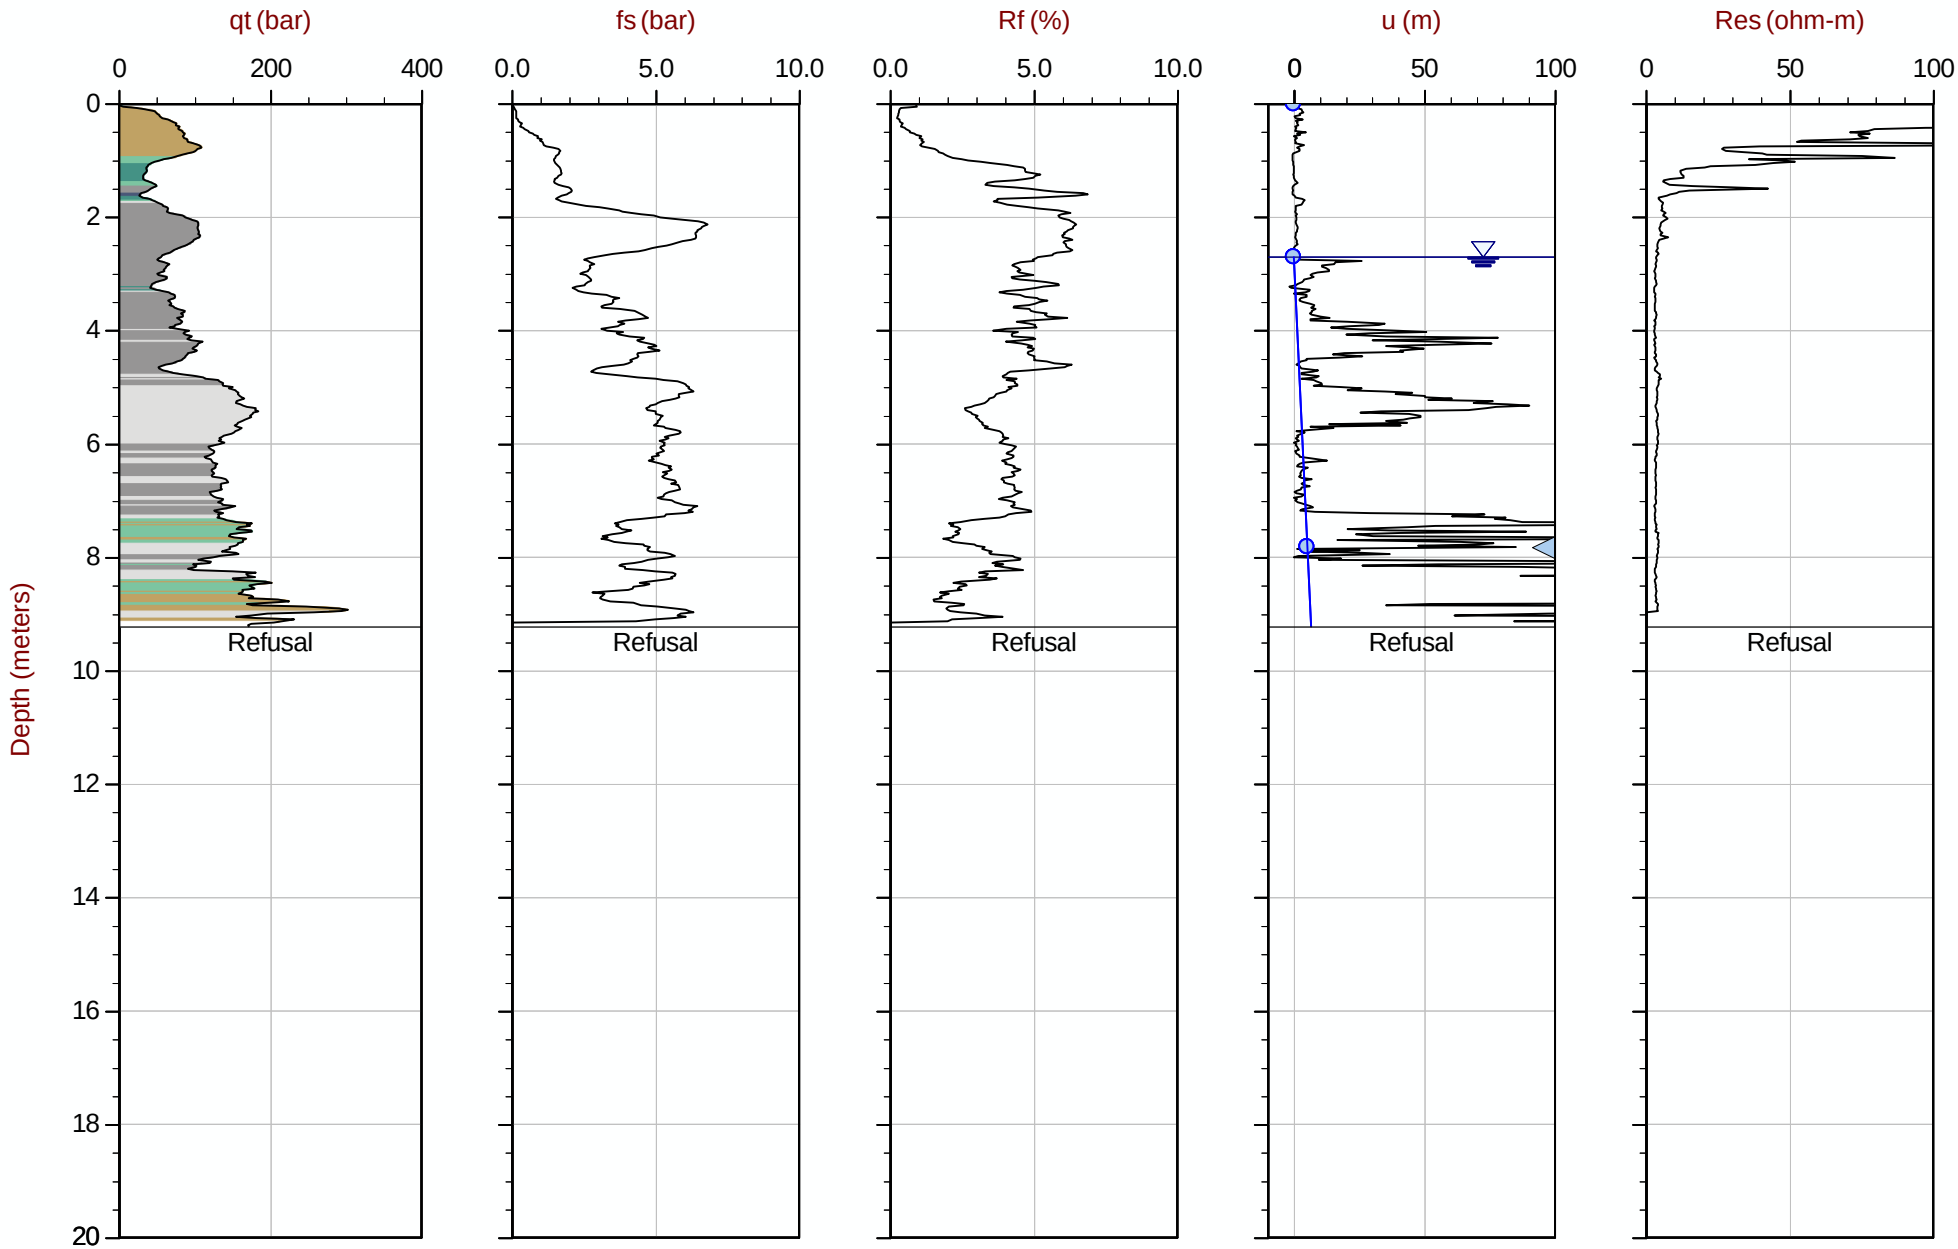

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT132.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612531m E: 416020m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 07:06
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT133
Cone: 750:T1500F15U35 Area= 15cm2

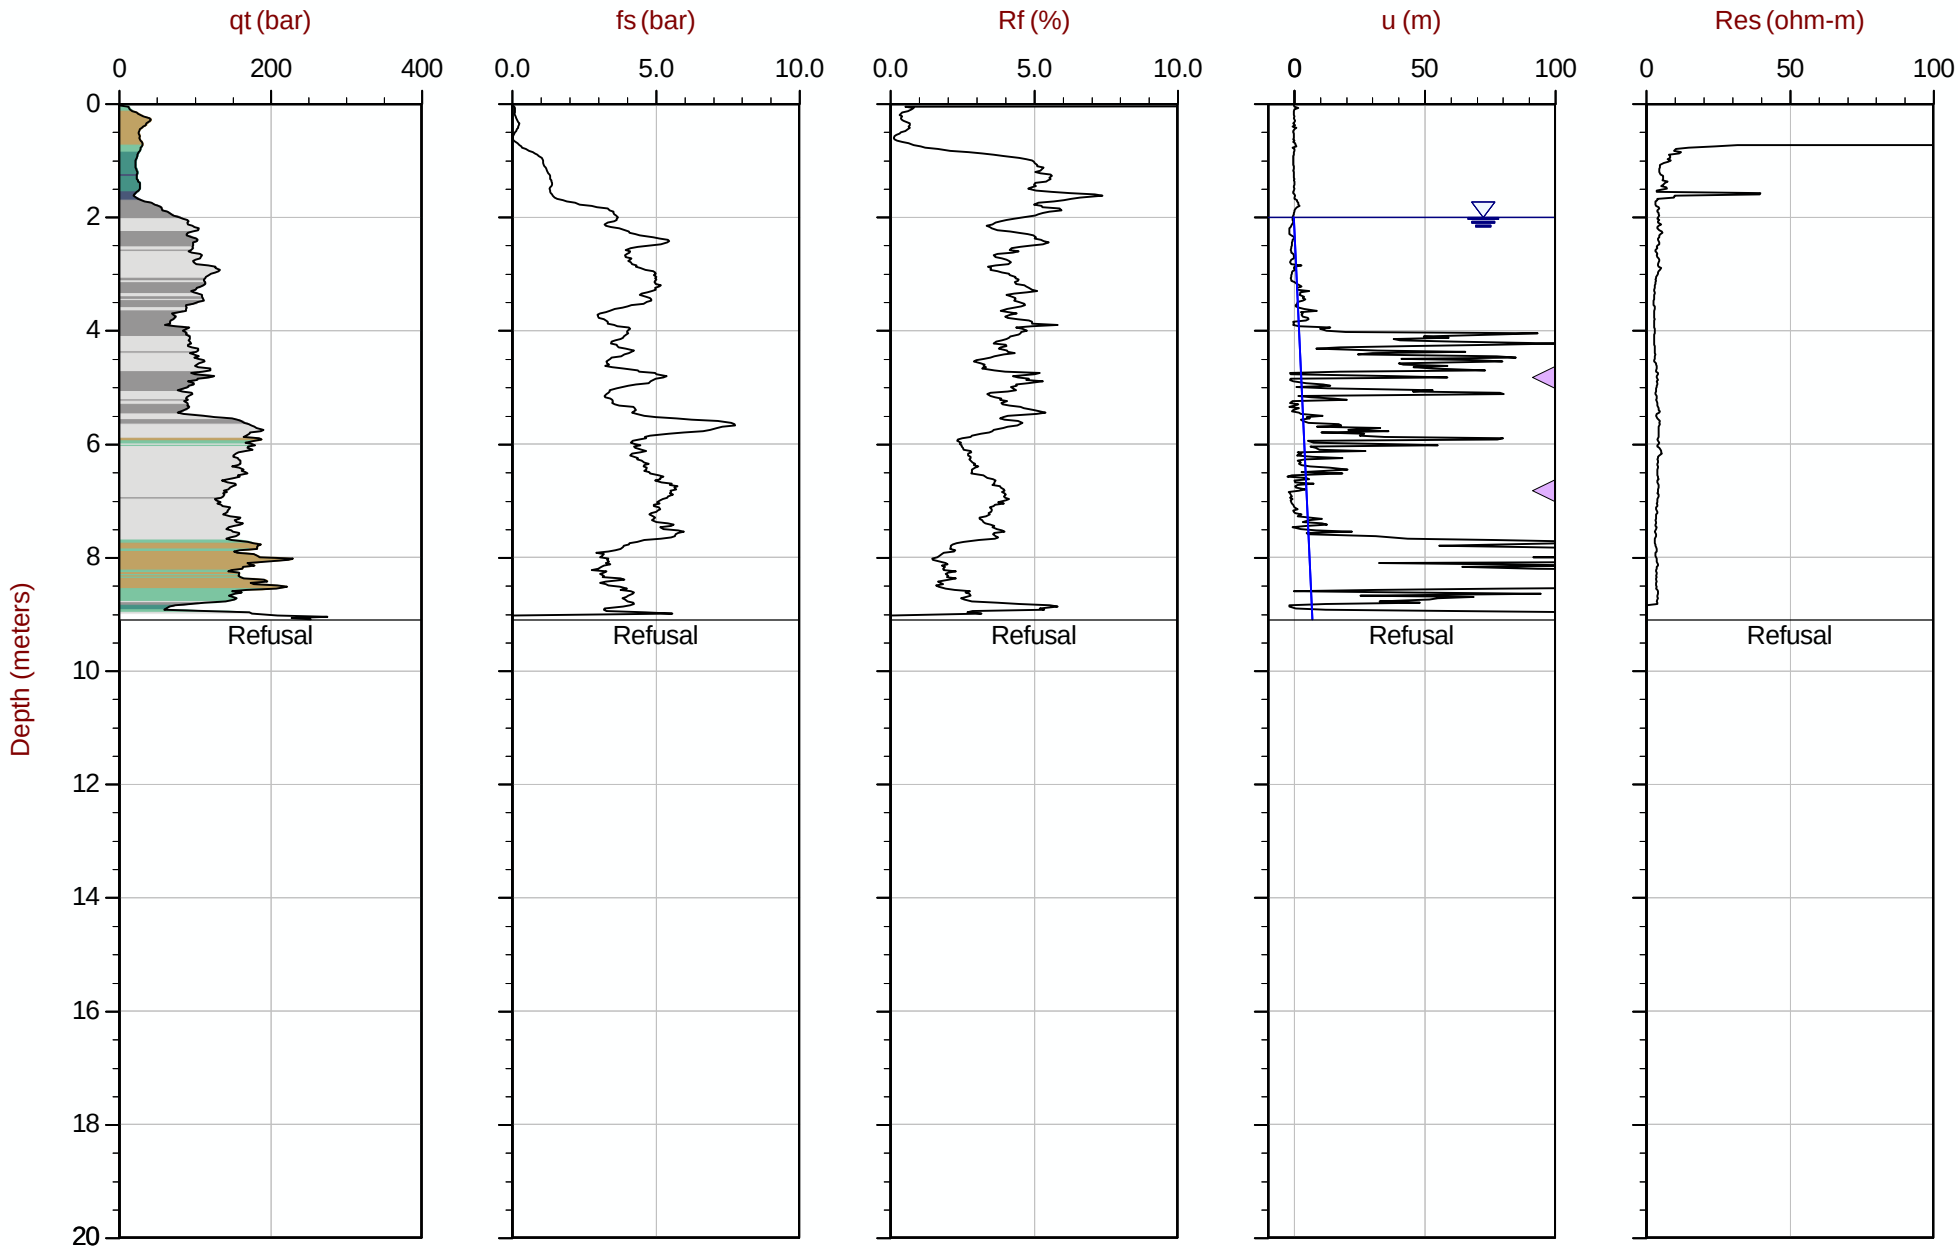

Max Depth: 9.100 m / 29.86 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT133.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612530m E: 416070m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 08:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT134
Cone: 750:T1500F15U35 Area= 15cm2

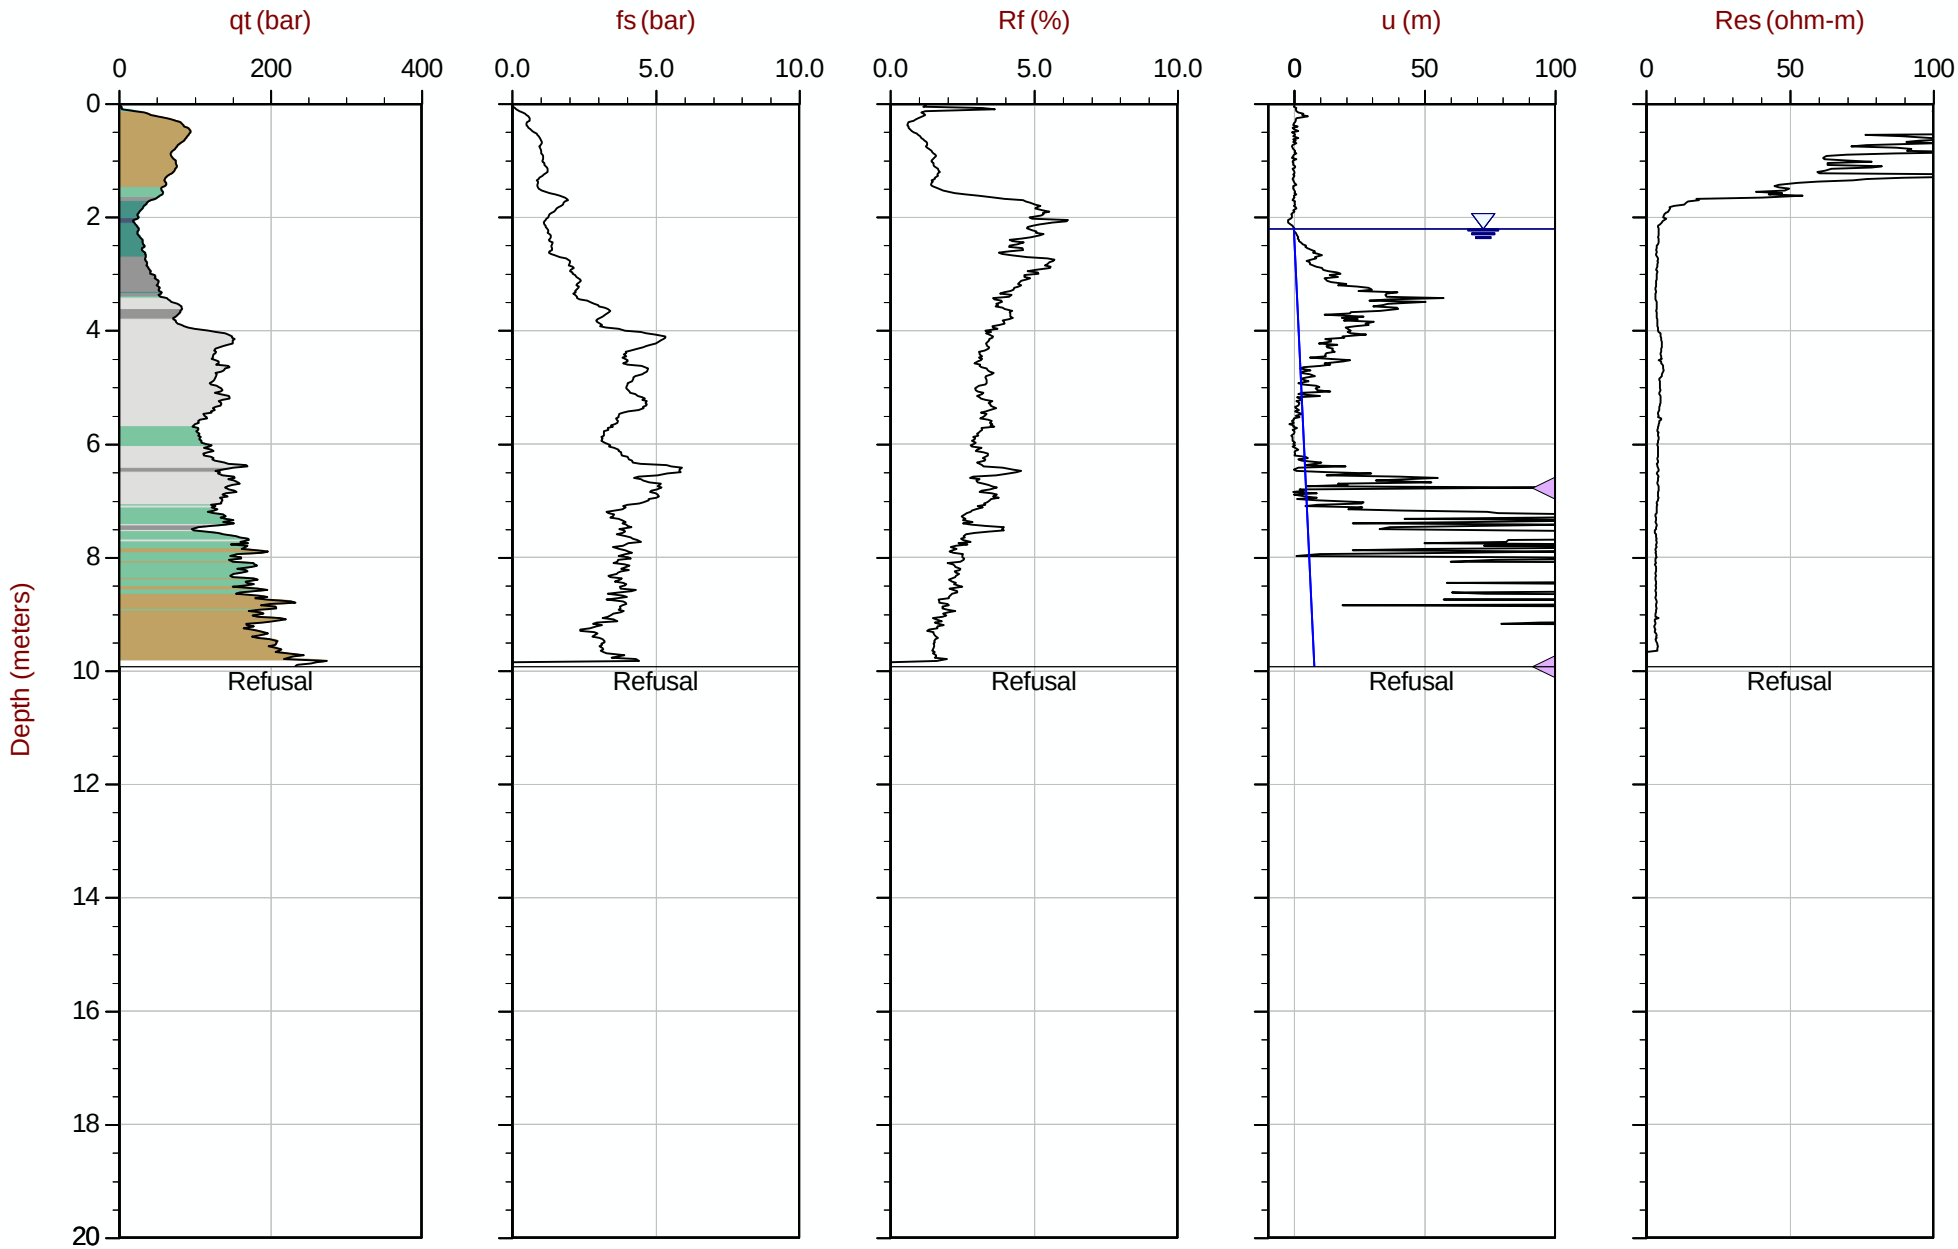

Max Depth: 9.925 m / 32.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT134.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612529m E: 416120m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 10:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT135
Cone: 750:T1500F15U35 Area= 15cm2

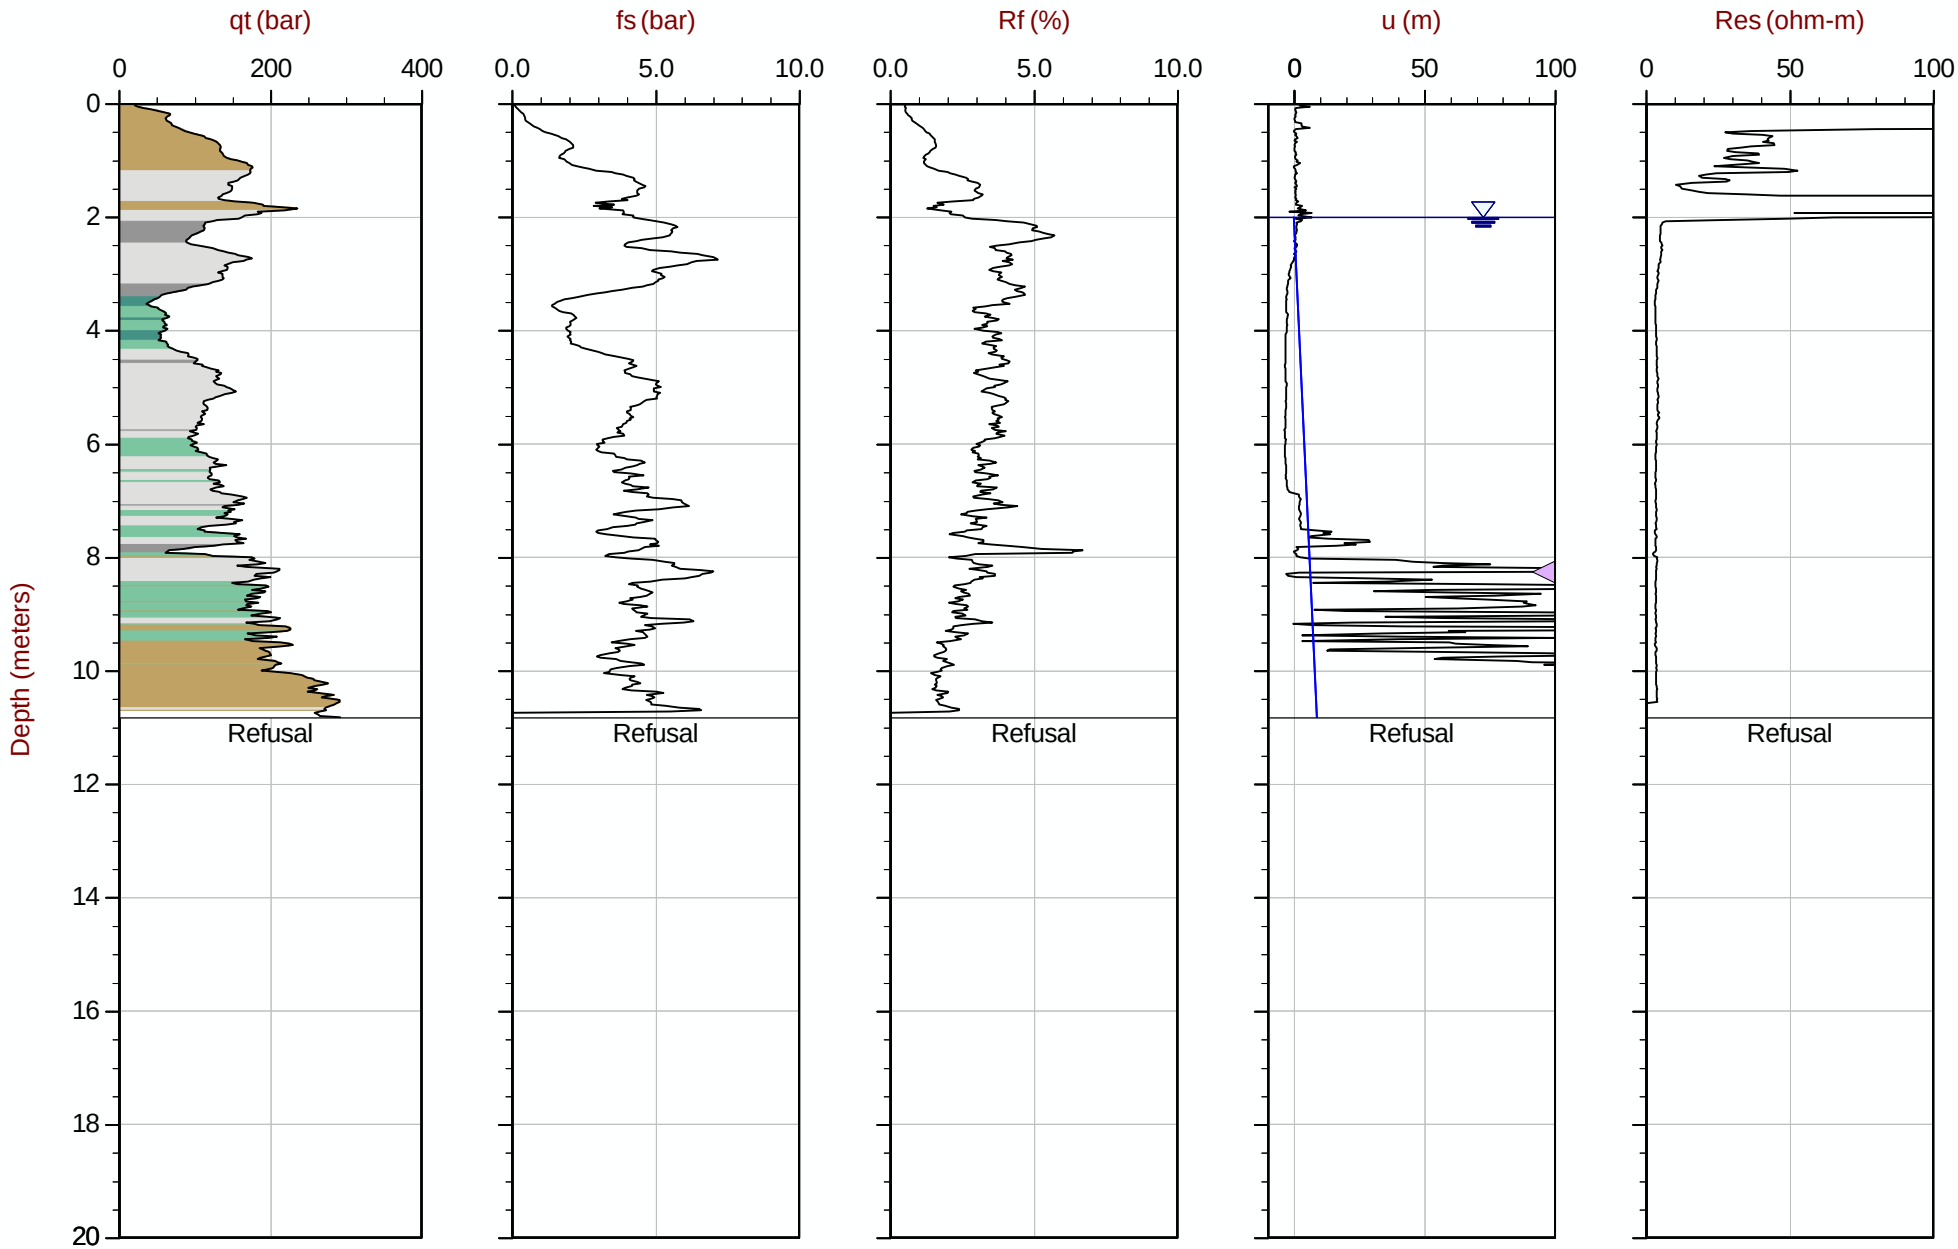

Max Depth: 10.825 m / 35.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT135.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612528m E: 416170m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 11:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT136
Cone: 750:T1500F15U35 Area= 15cm2

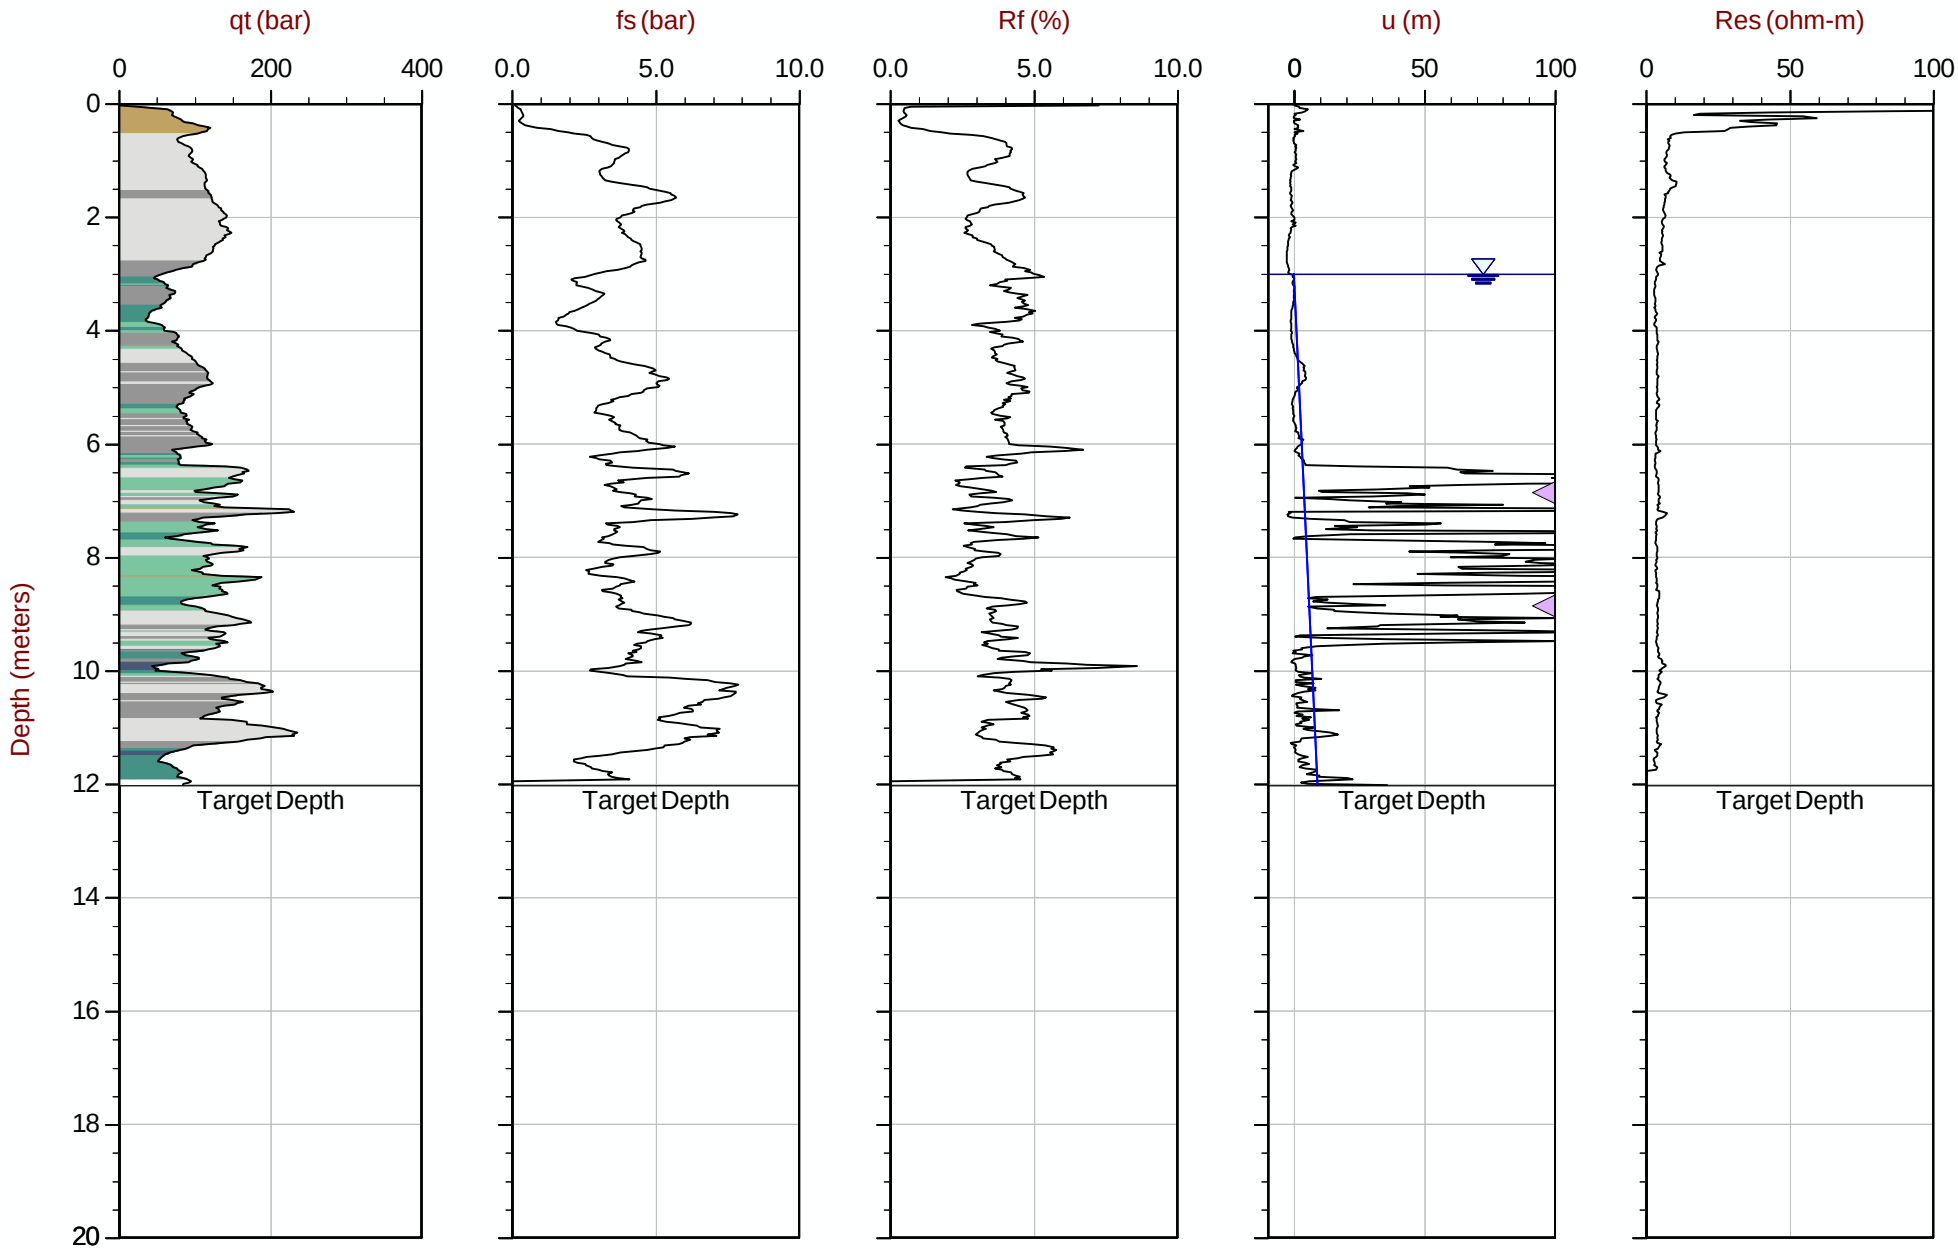

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT136.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612526m E: 416220m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 12:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT137
Cone: 750:T1500F15U35 Area= 15cm2

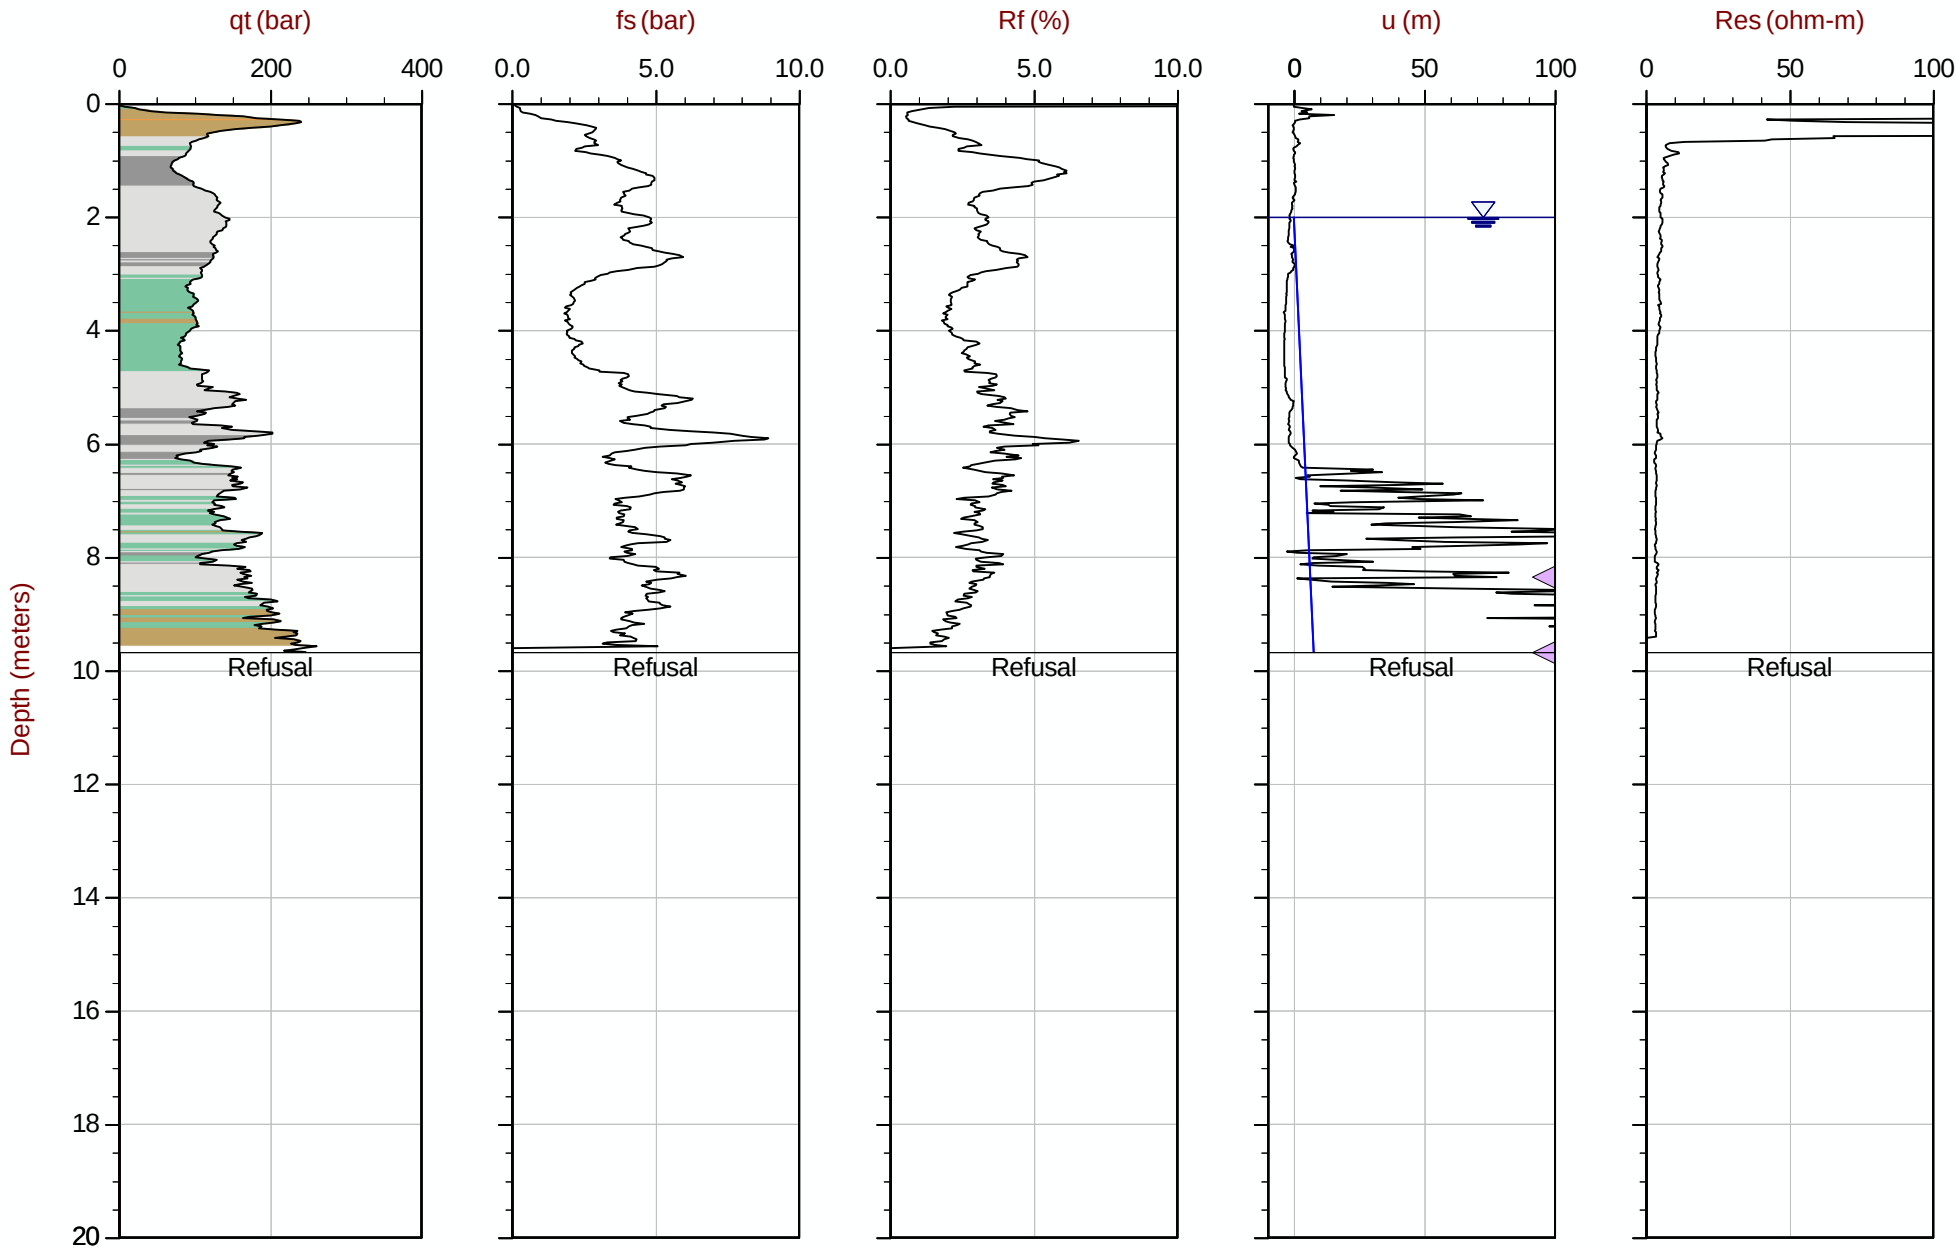

Max Depth: 9.675 m / 31.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT137.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612525m E: 416270m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 14:22
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT138
Cone: 854:T1500F15U35 Area= 15cm2

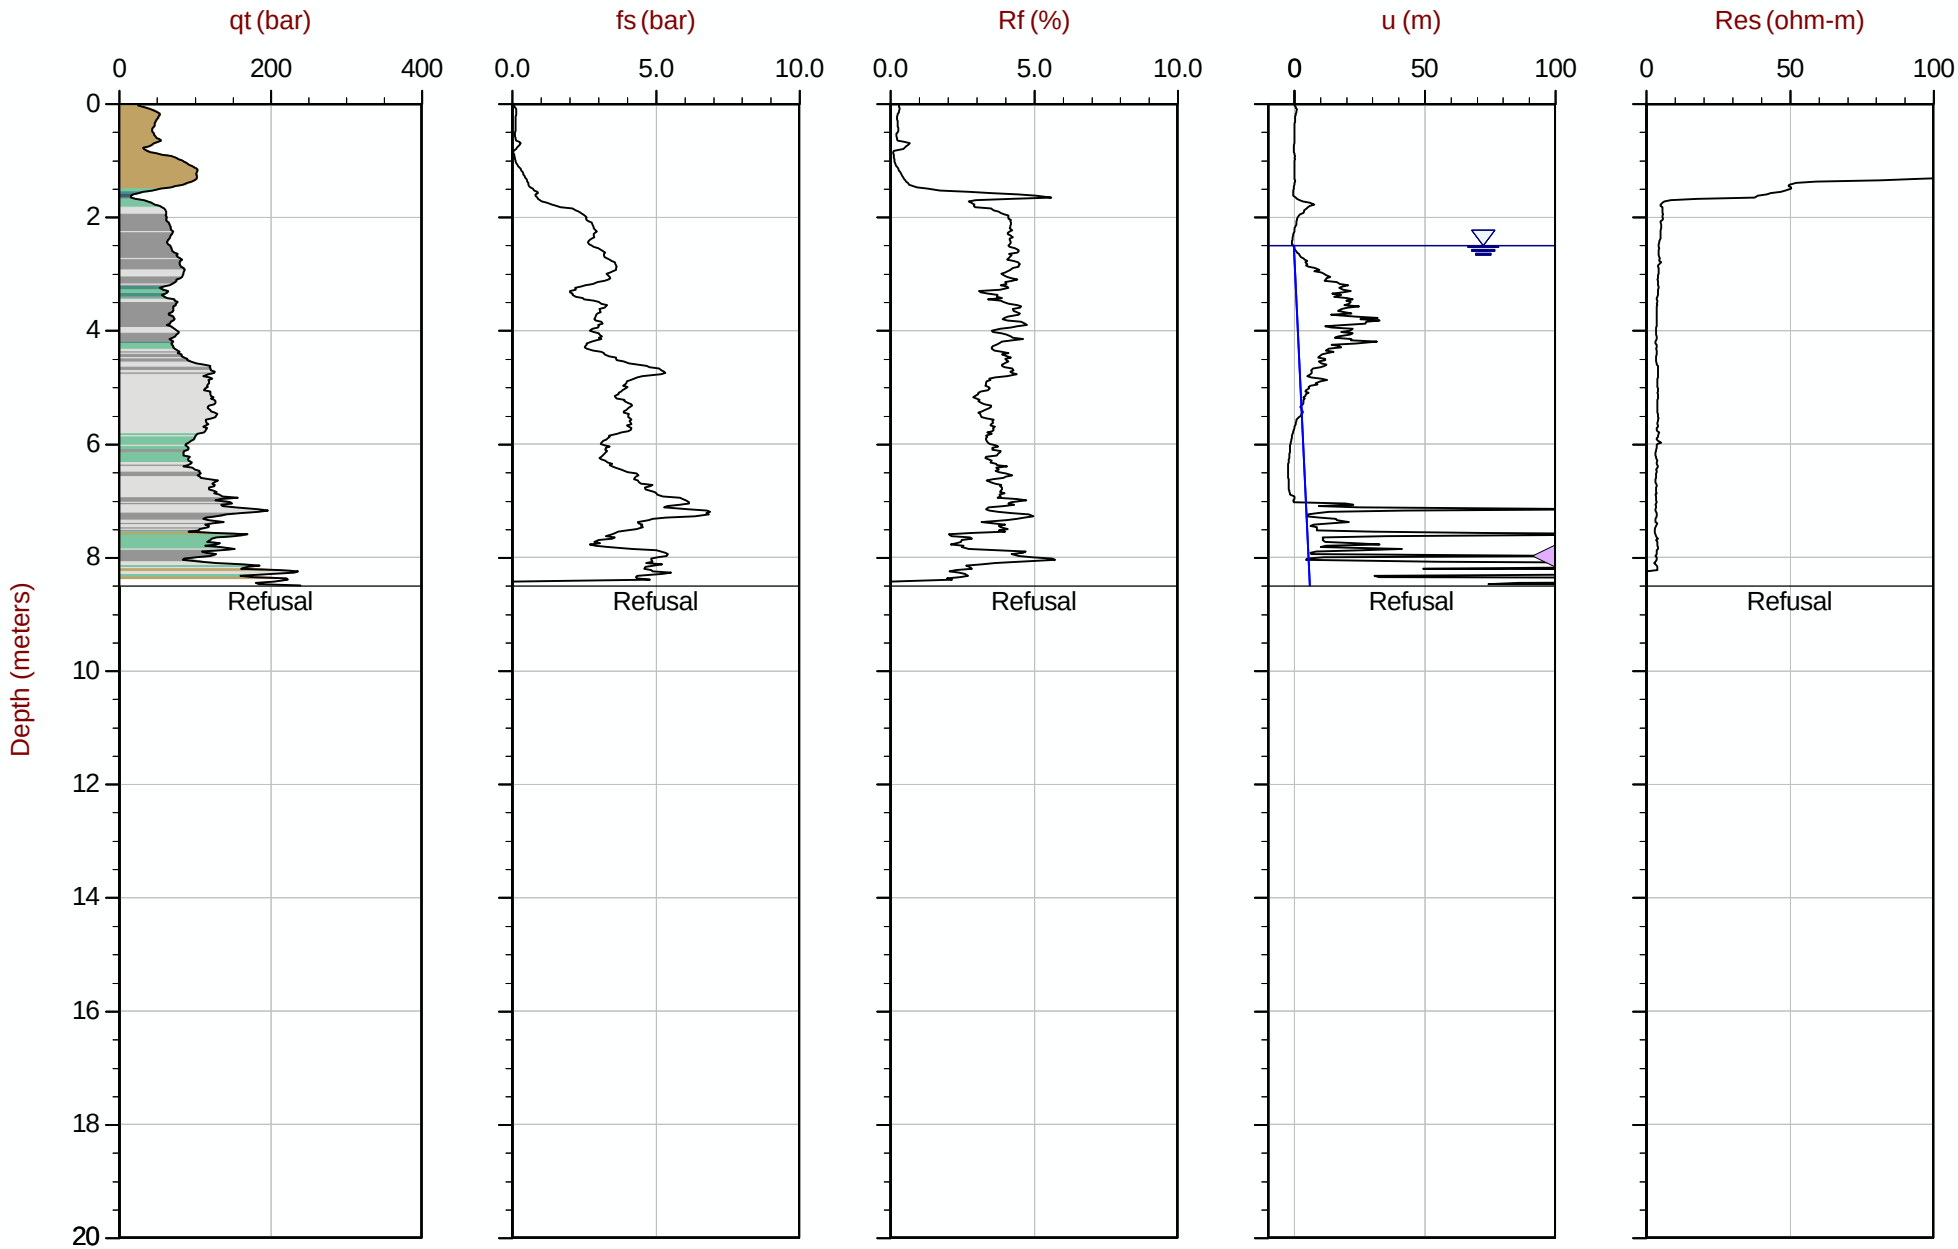

Max Depth: 8.500 m / 27.89 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT138.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612524m E: 416320m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 15:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT139
Cone: 854:T1500F15U35 Area= 15cm2

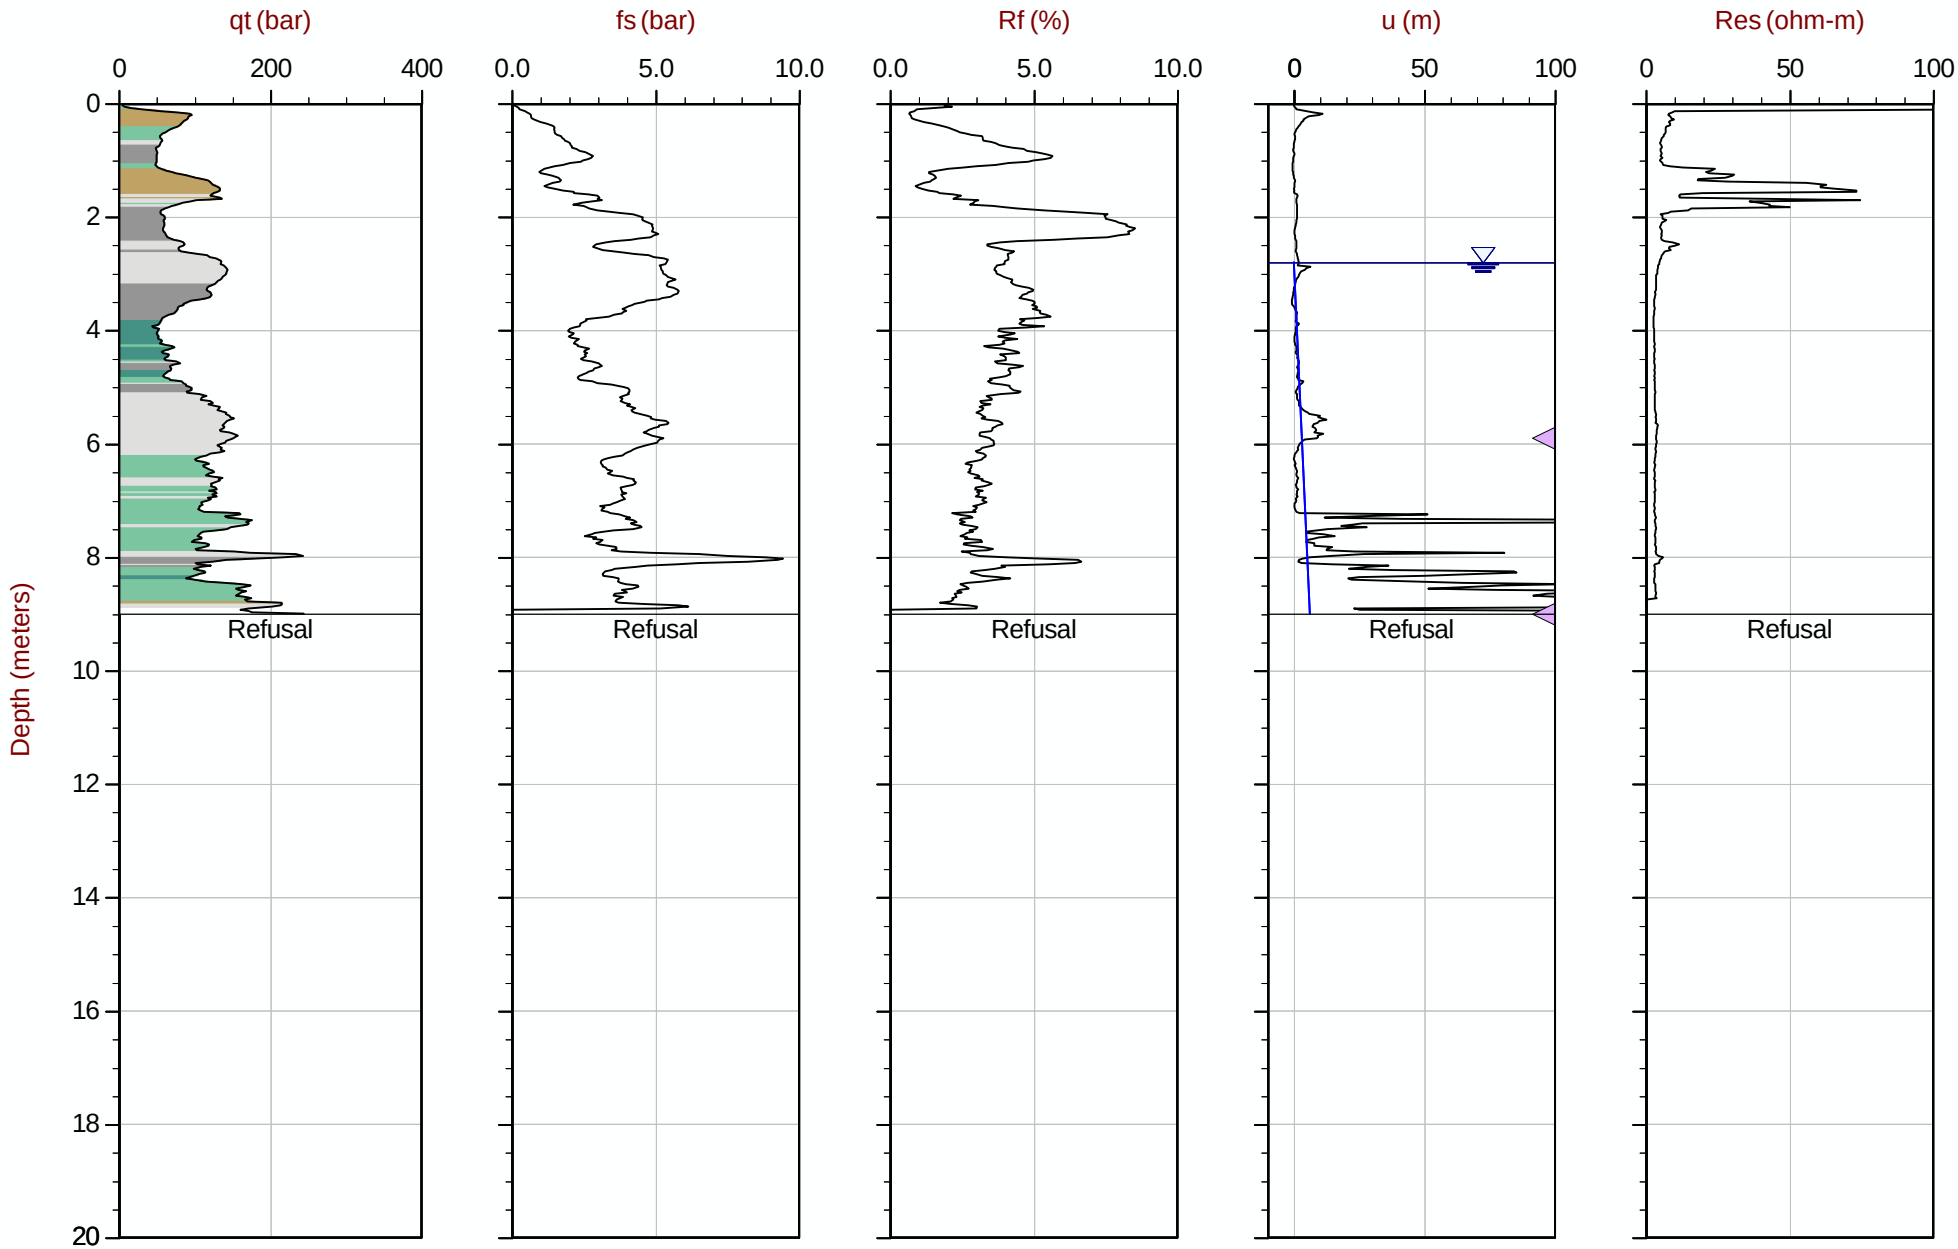

Max Depth: 9.000 m / 29.53 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT139.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612523m E: 416370m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 16:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT140
Cone: 854:T1500F15U35 Area= 15cm2

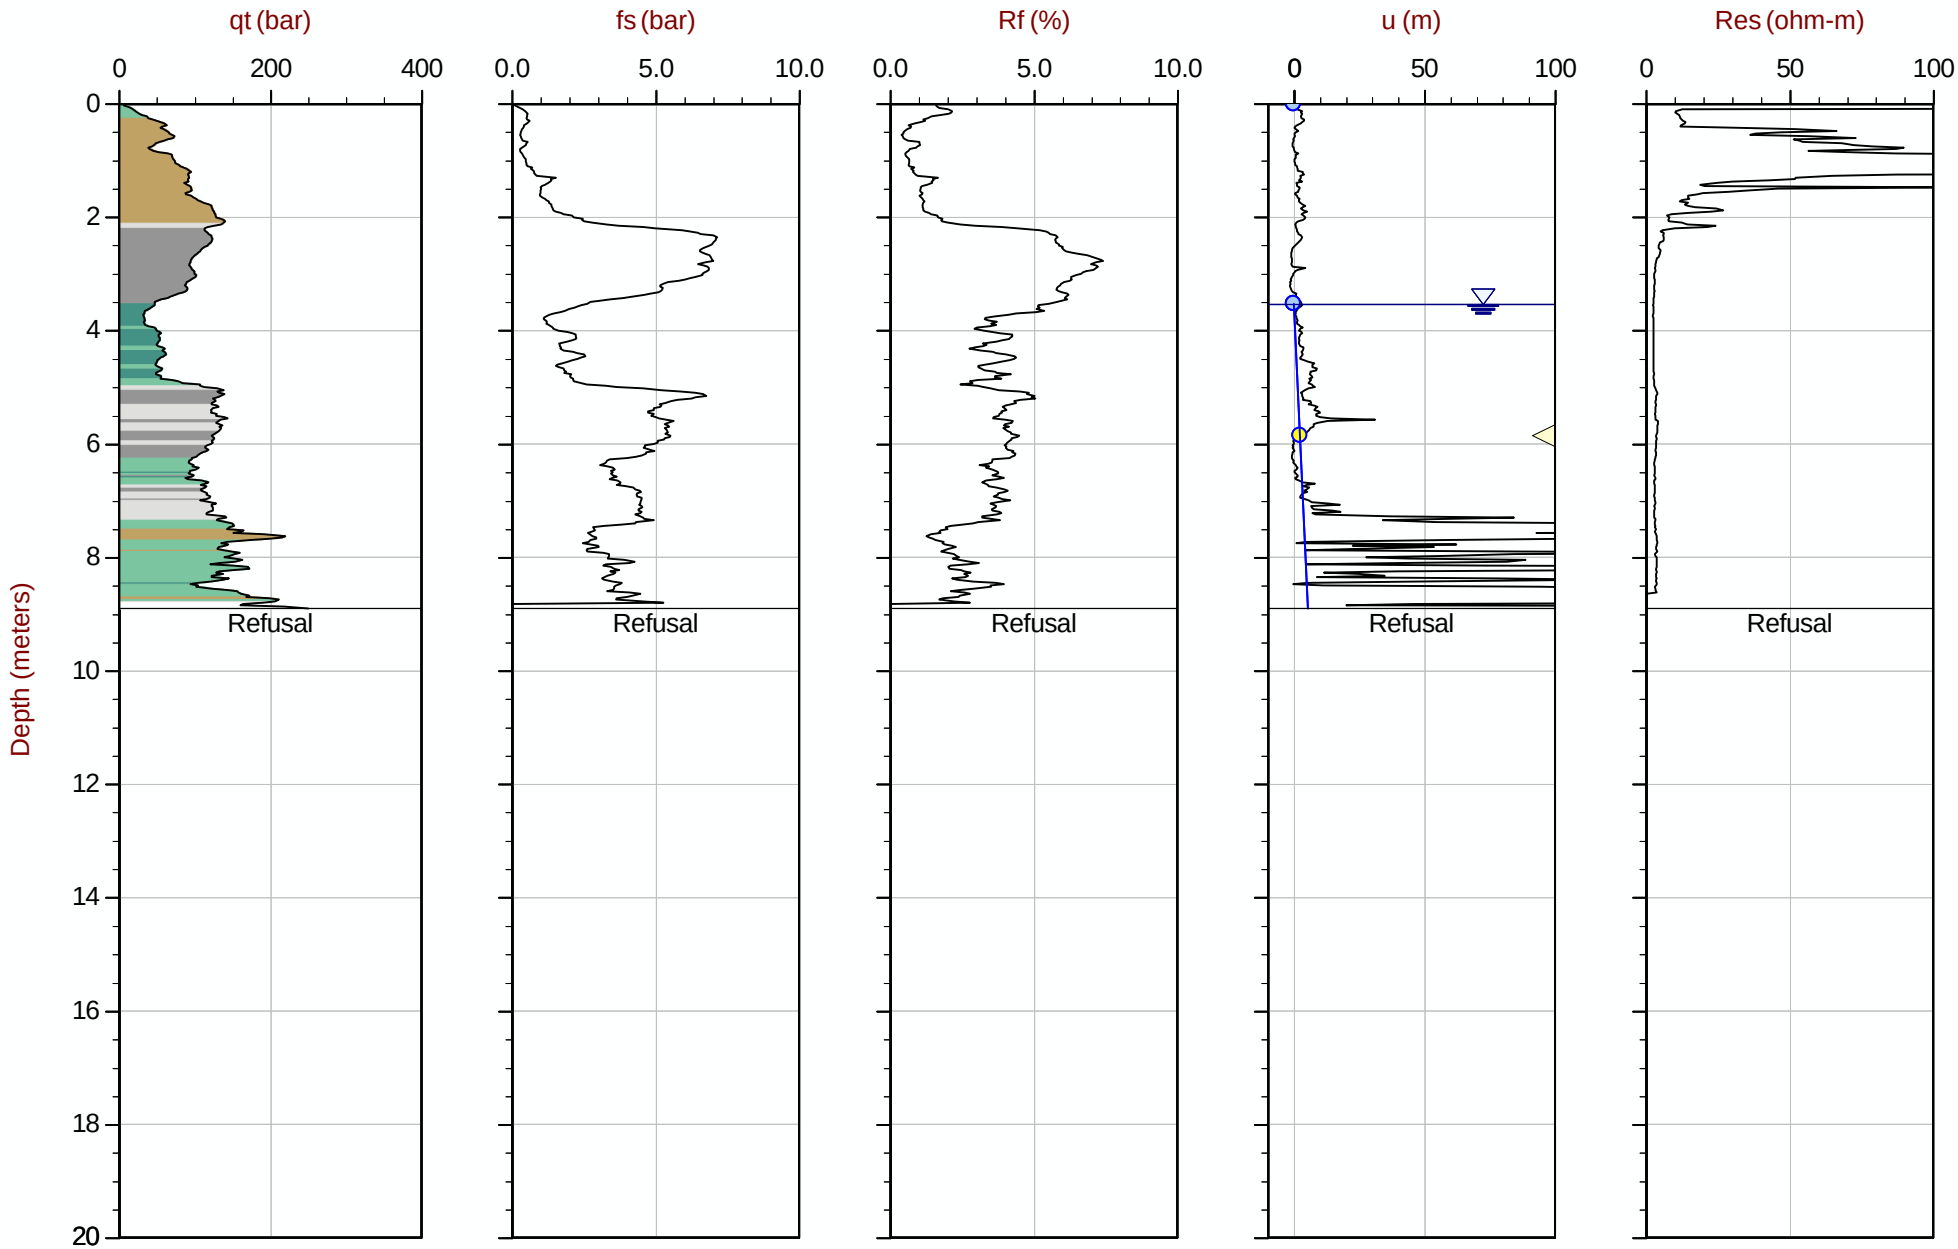

Max Depth: 8.900 m / 29.20 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT140.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612522m E: 416419m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 07:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT141
Cone: 854:T1500F15U35 Area= 15cm2

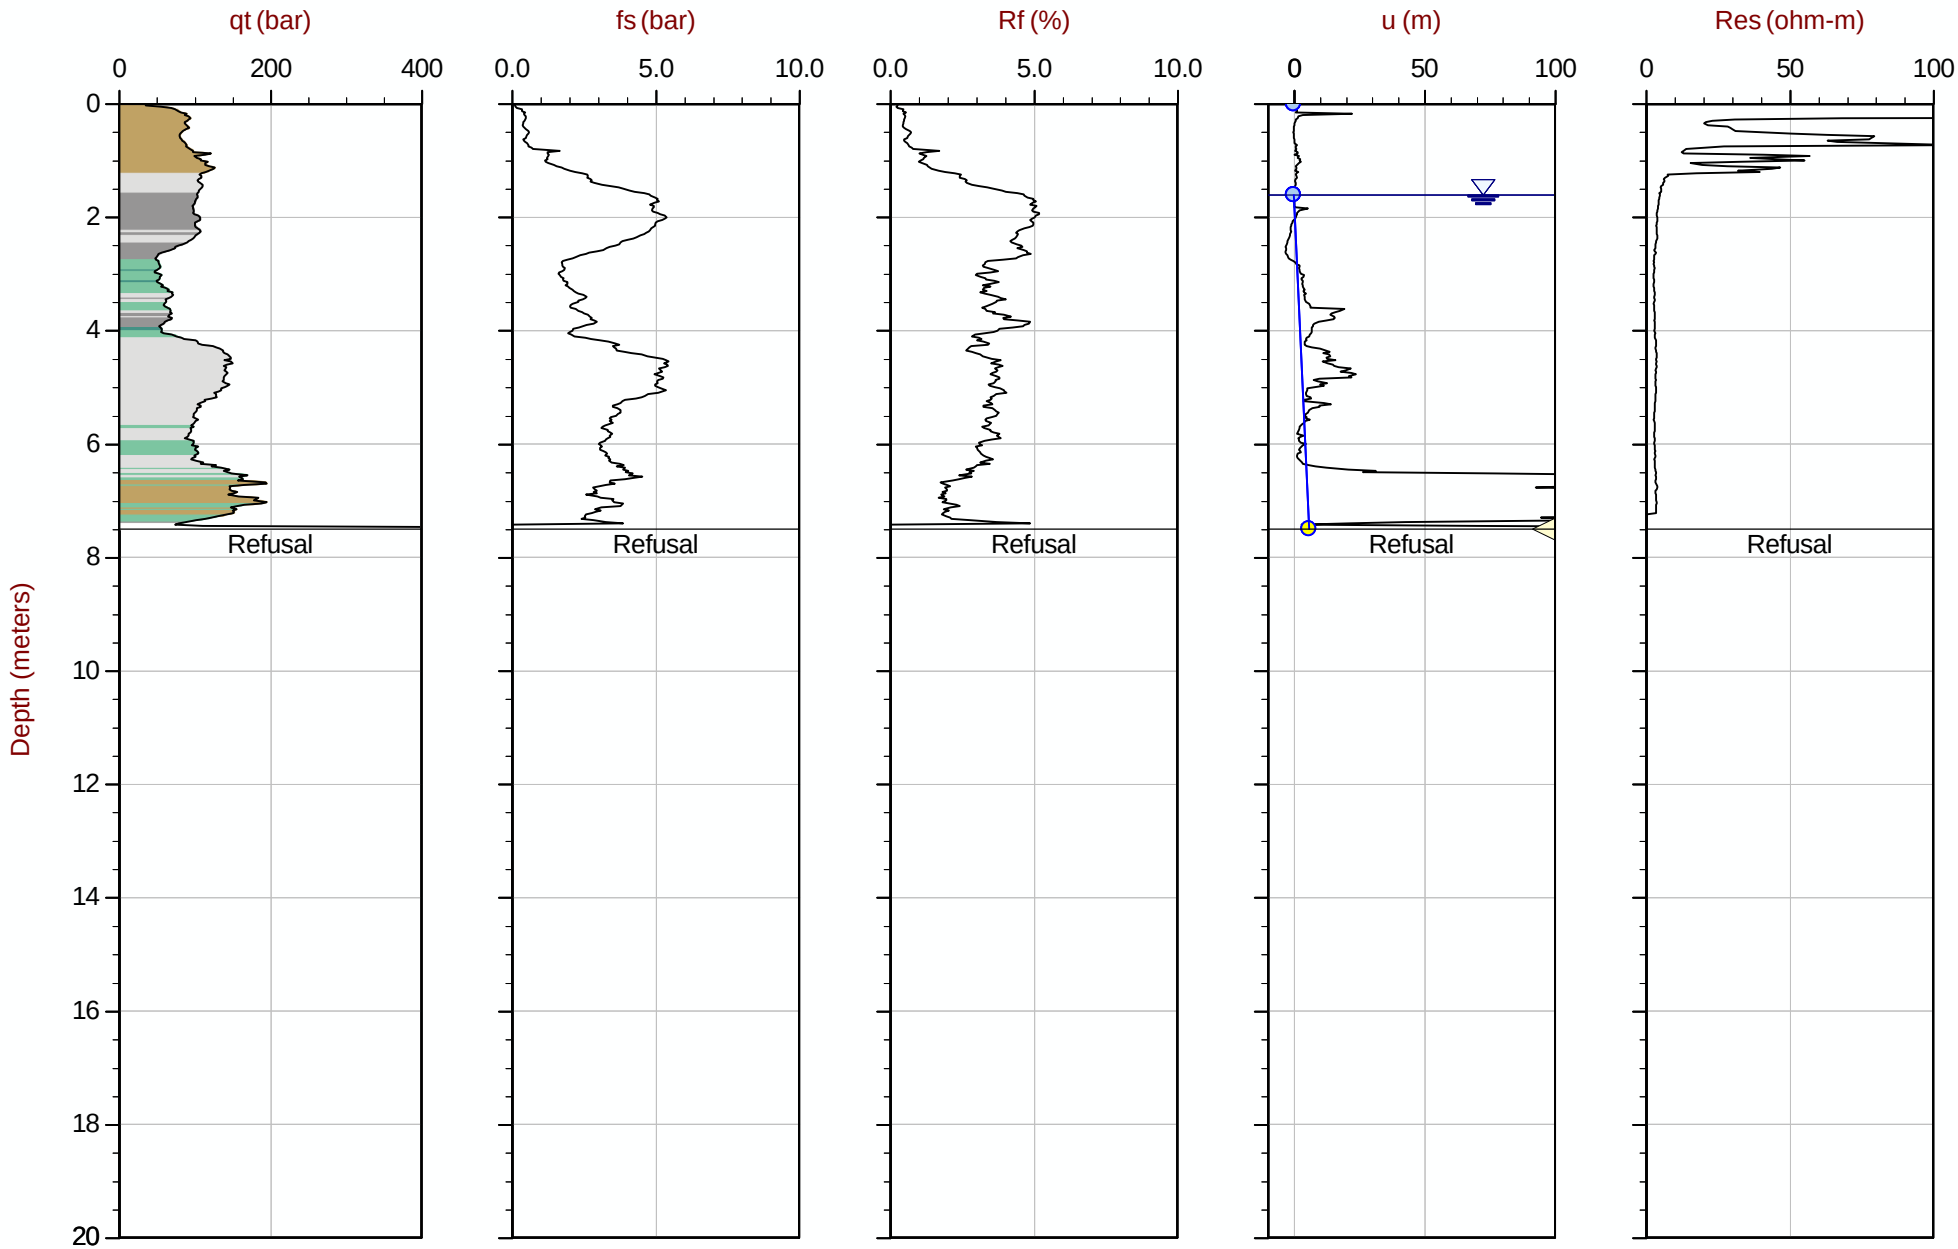

Max Depth: 7.500 m / 24.61 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT141.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612521m E: 416470m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 09:39
Site: Brooks, Alberta

Sounding: RCPT22-22CPT142
Cone: 854:T1500F15U35 Area= 15cm2

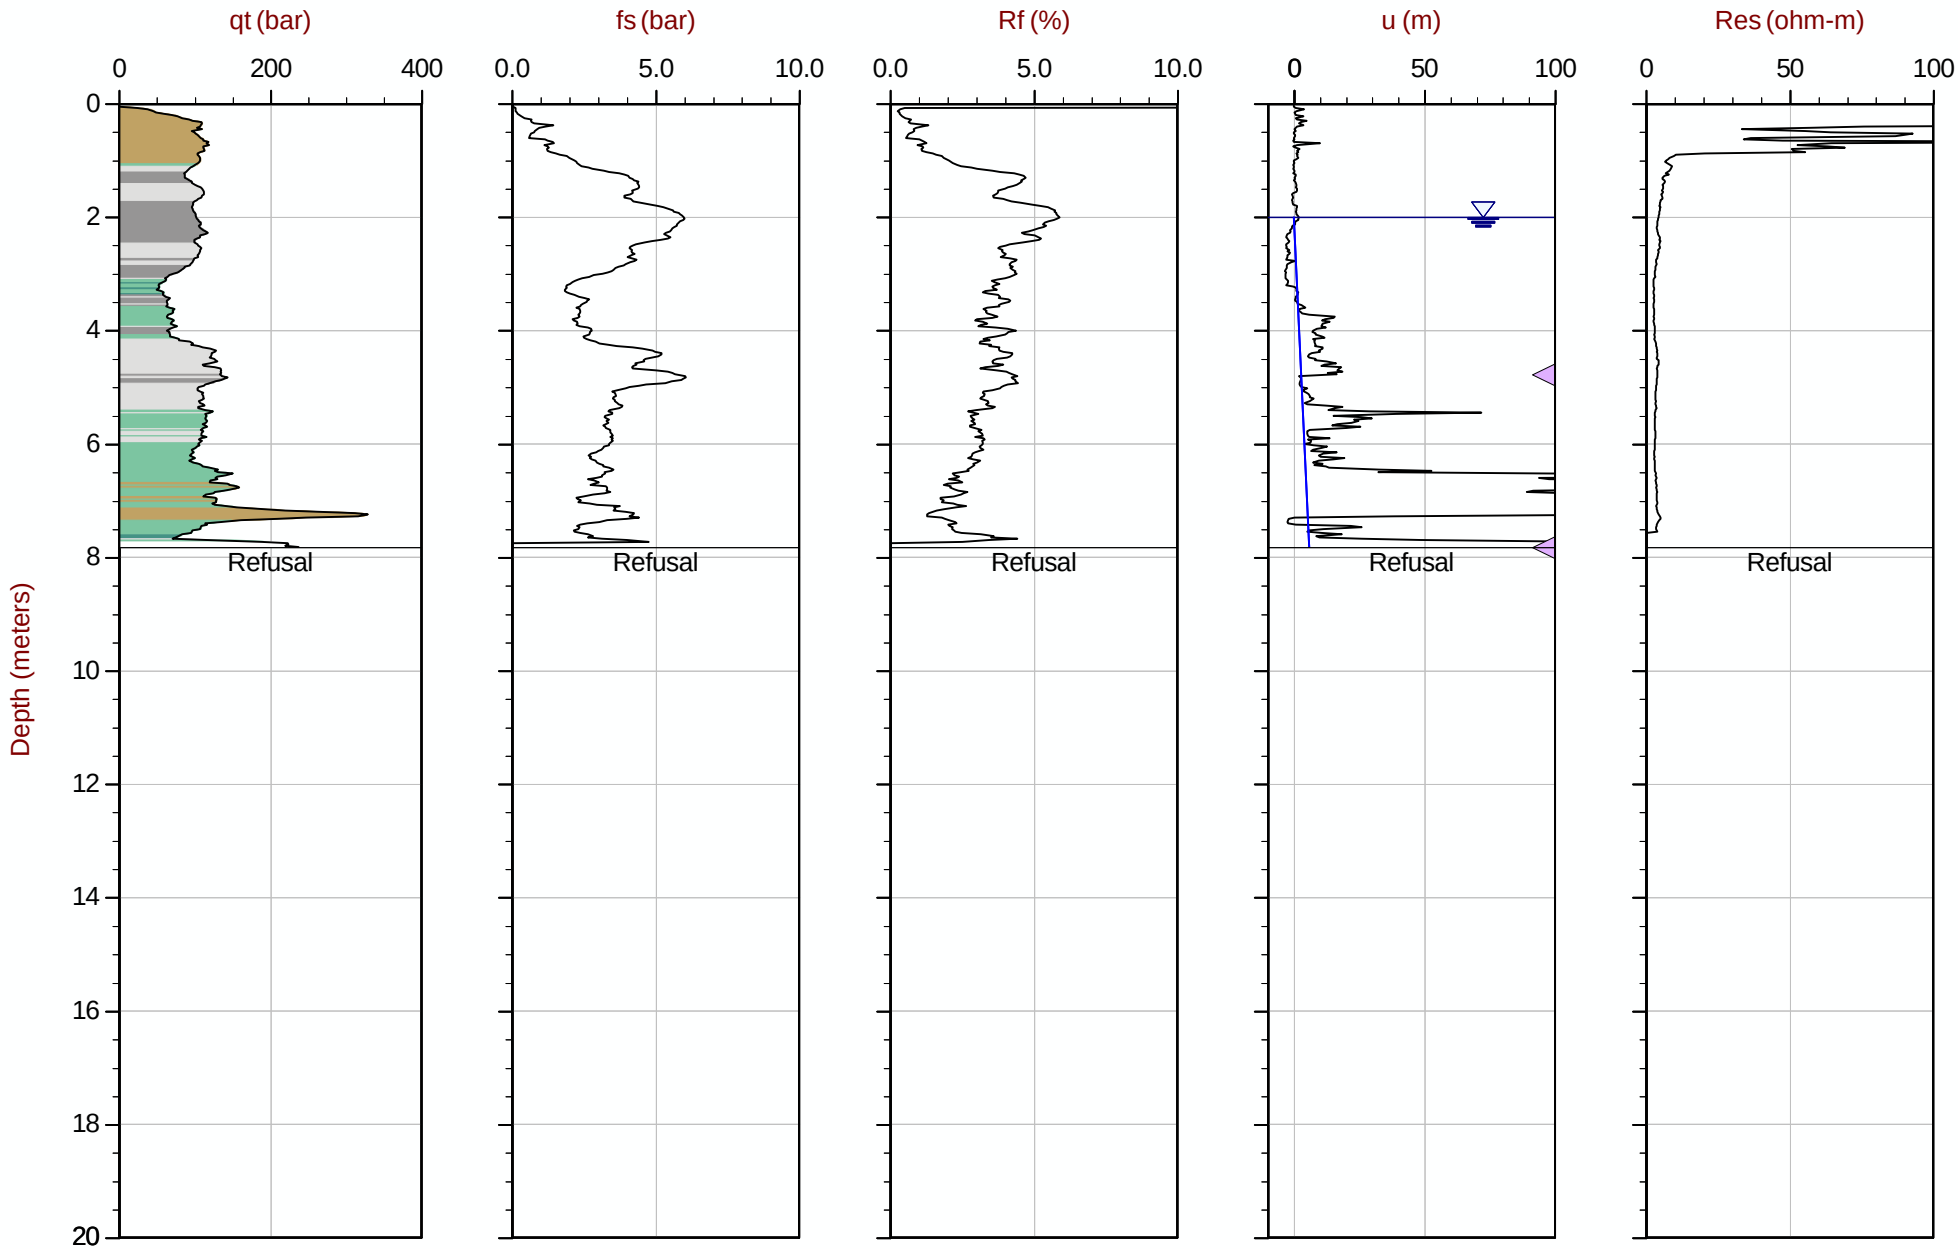

Max Depth: 7.825 m / 25.67 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT142.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612520m E: 416519m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 10:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT143
Cone: 854:T1500F15U35 Area= 15cm2

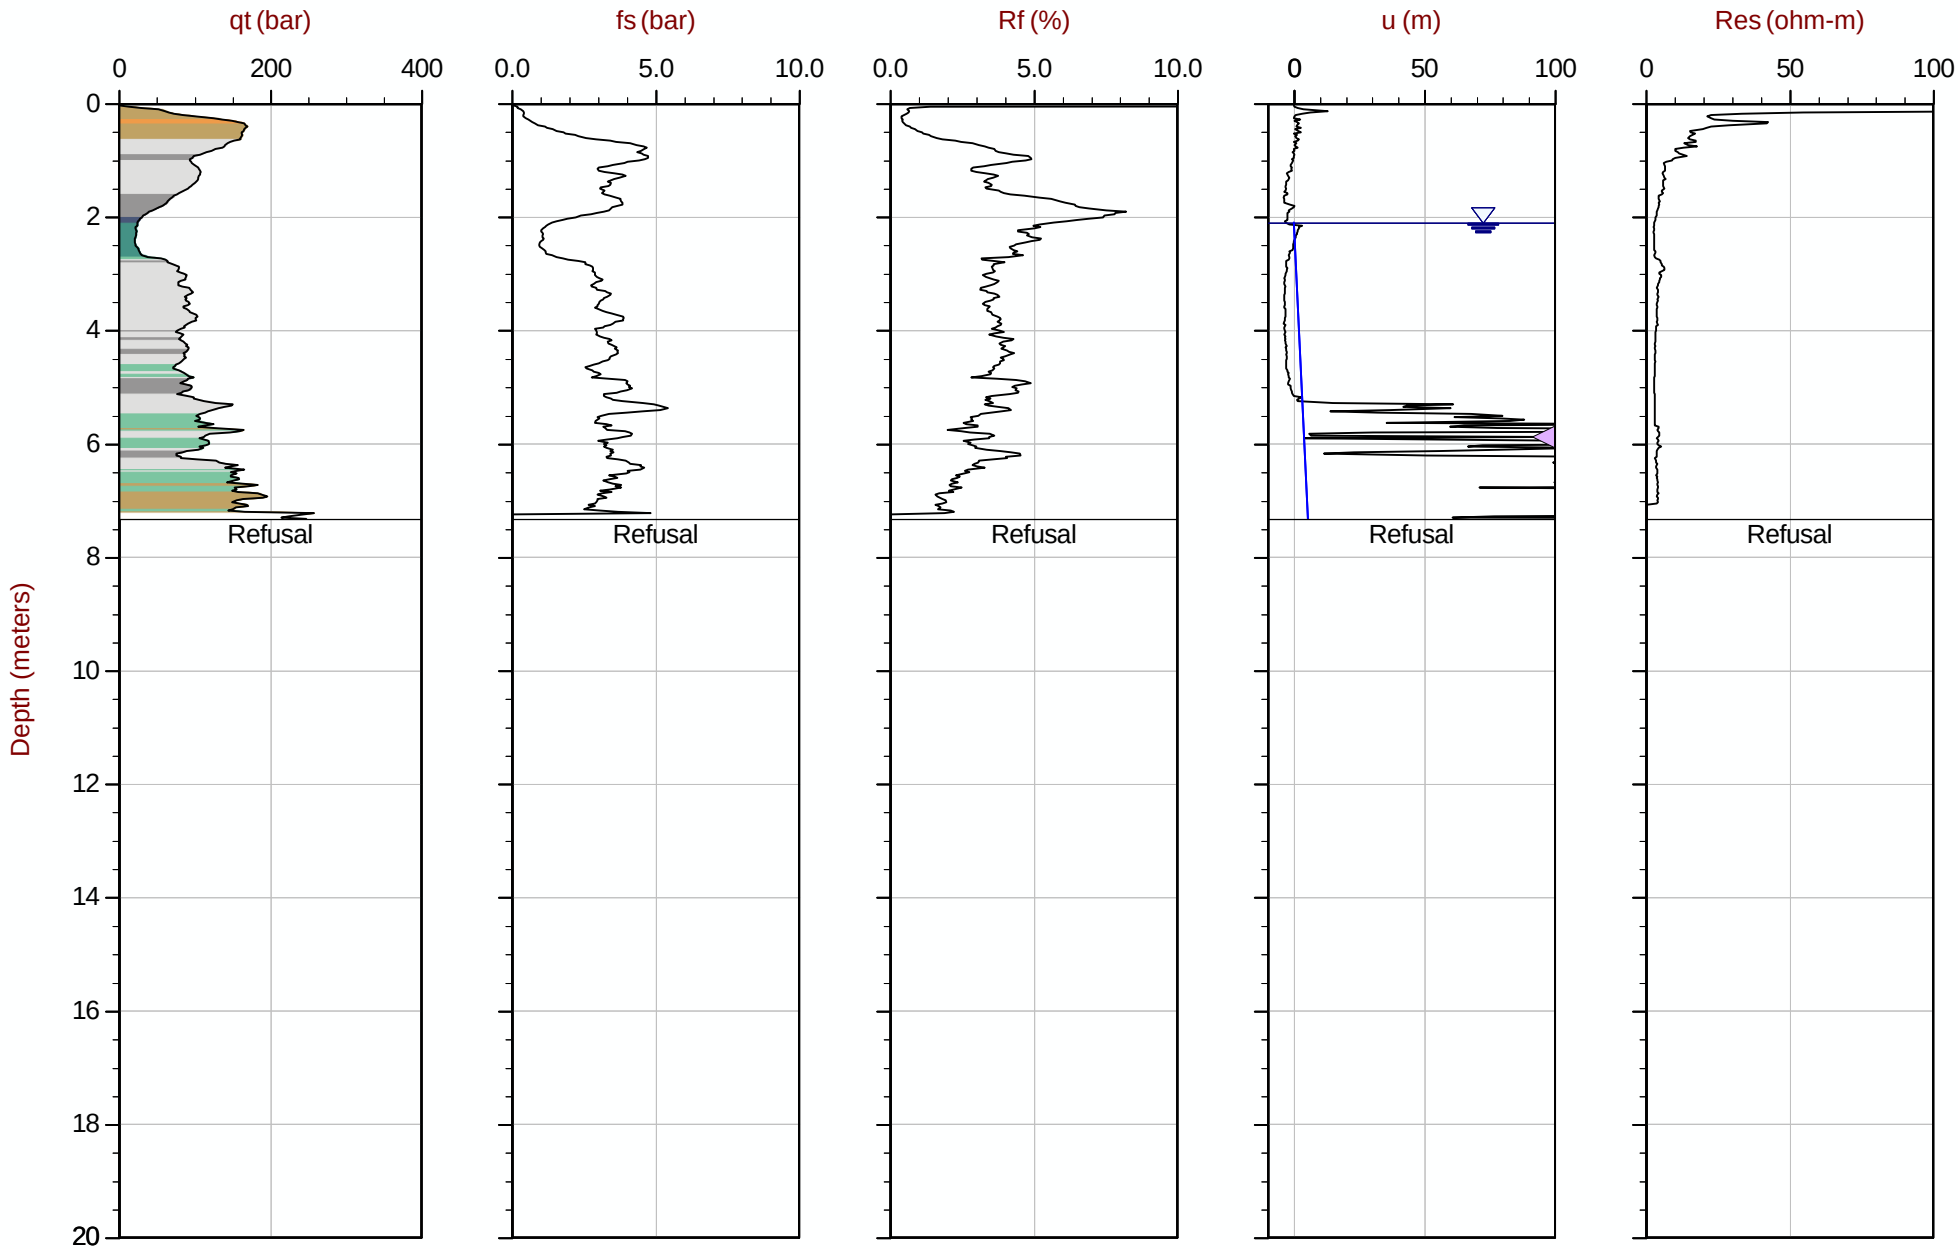

Max Depth: 7.325 m / 24.03 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT143.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612519m E: 416570m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 12:47
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT144
Cone: 854:T1500F15U35 Area= 15cm2

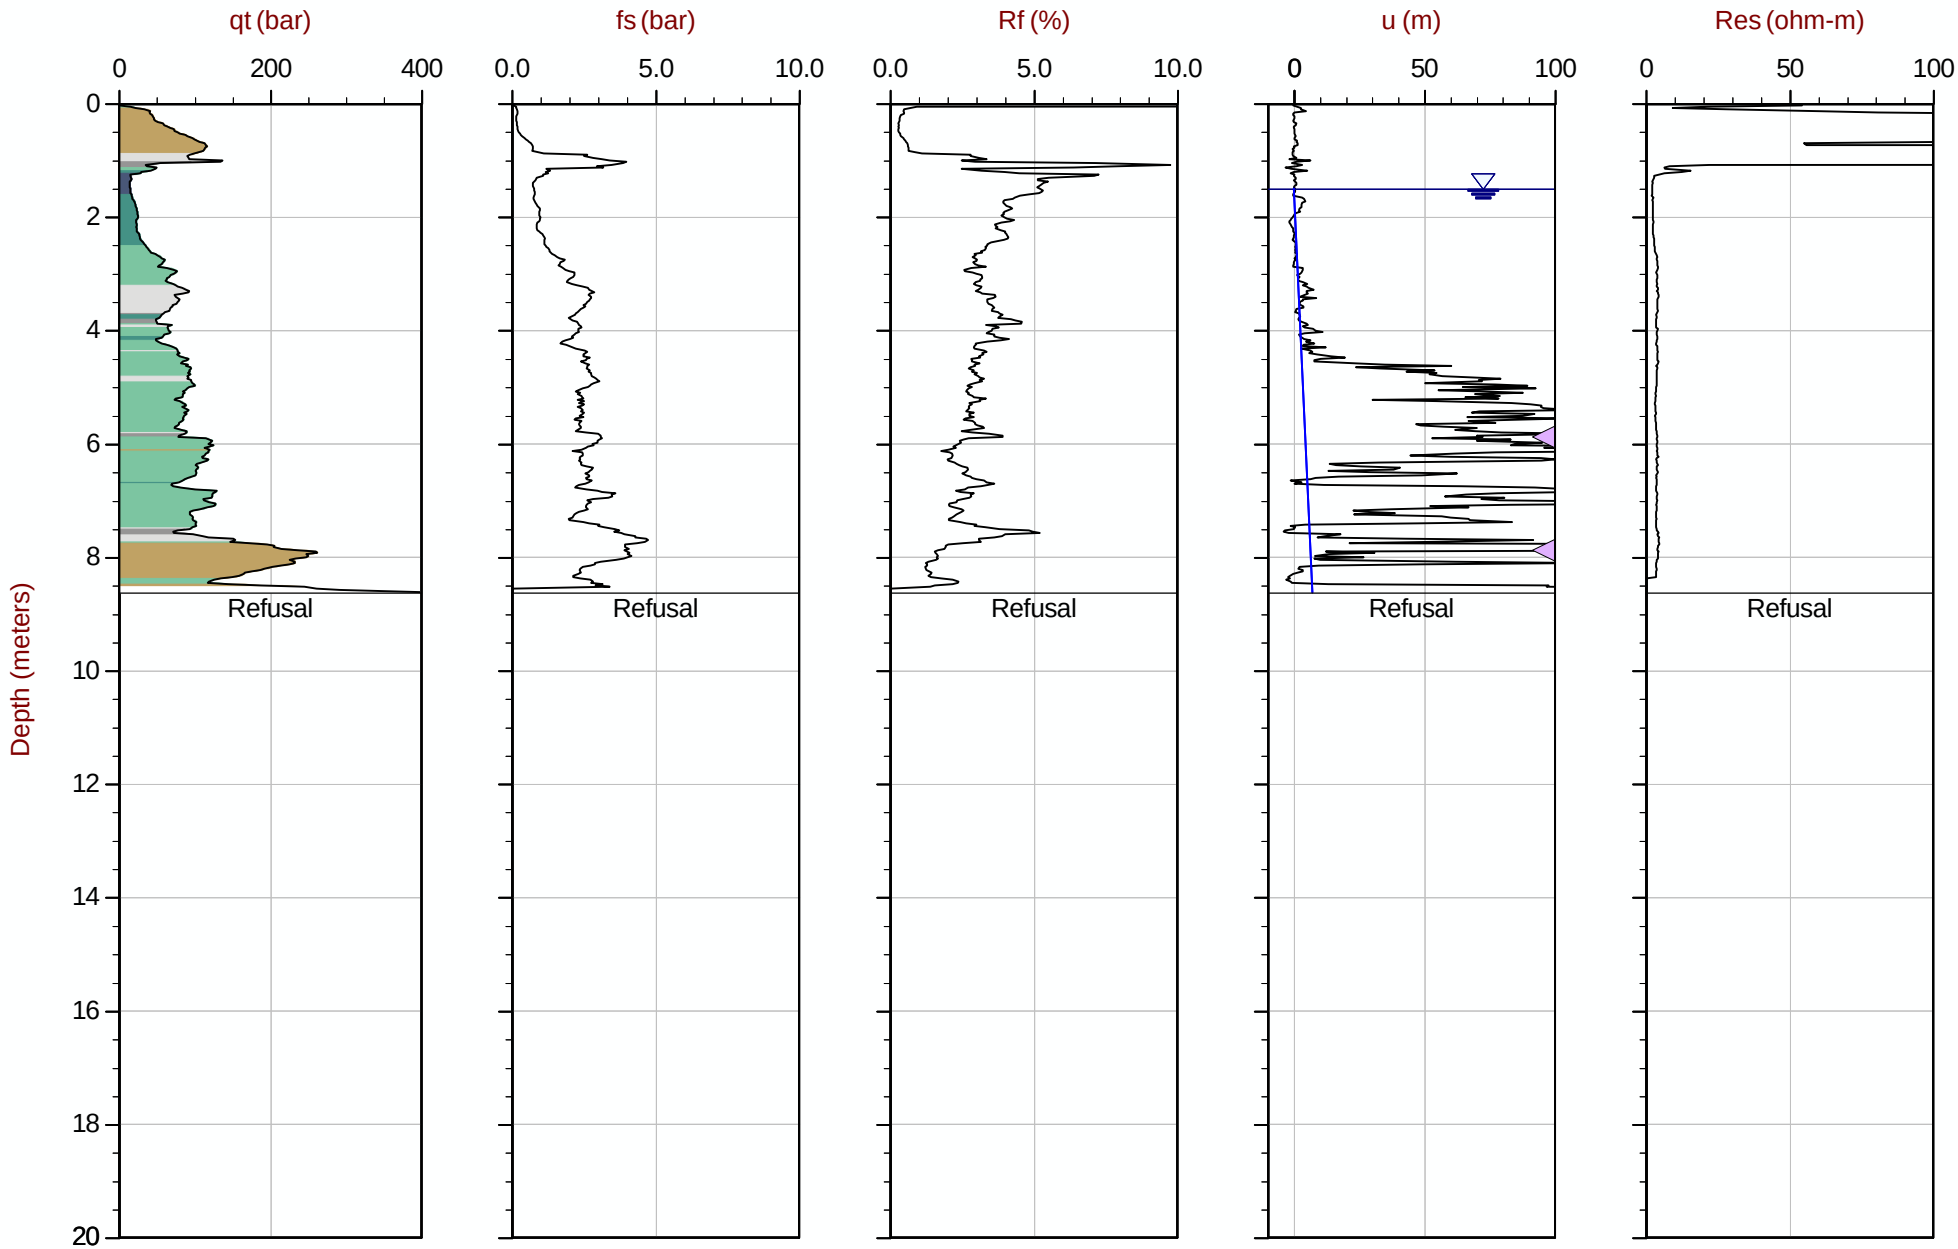

Max Depth: 8.625 m / 28.30 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT144.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612516m E: 416627m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 13:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT145
Cone: 854:T1500F15U35 Area= 15cm2

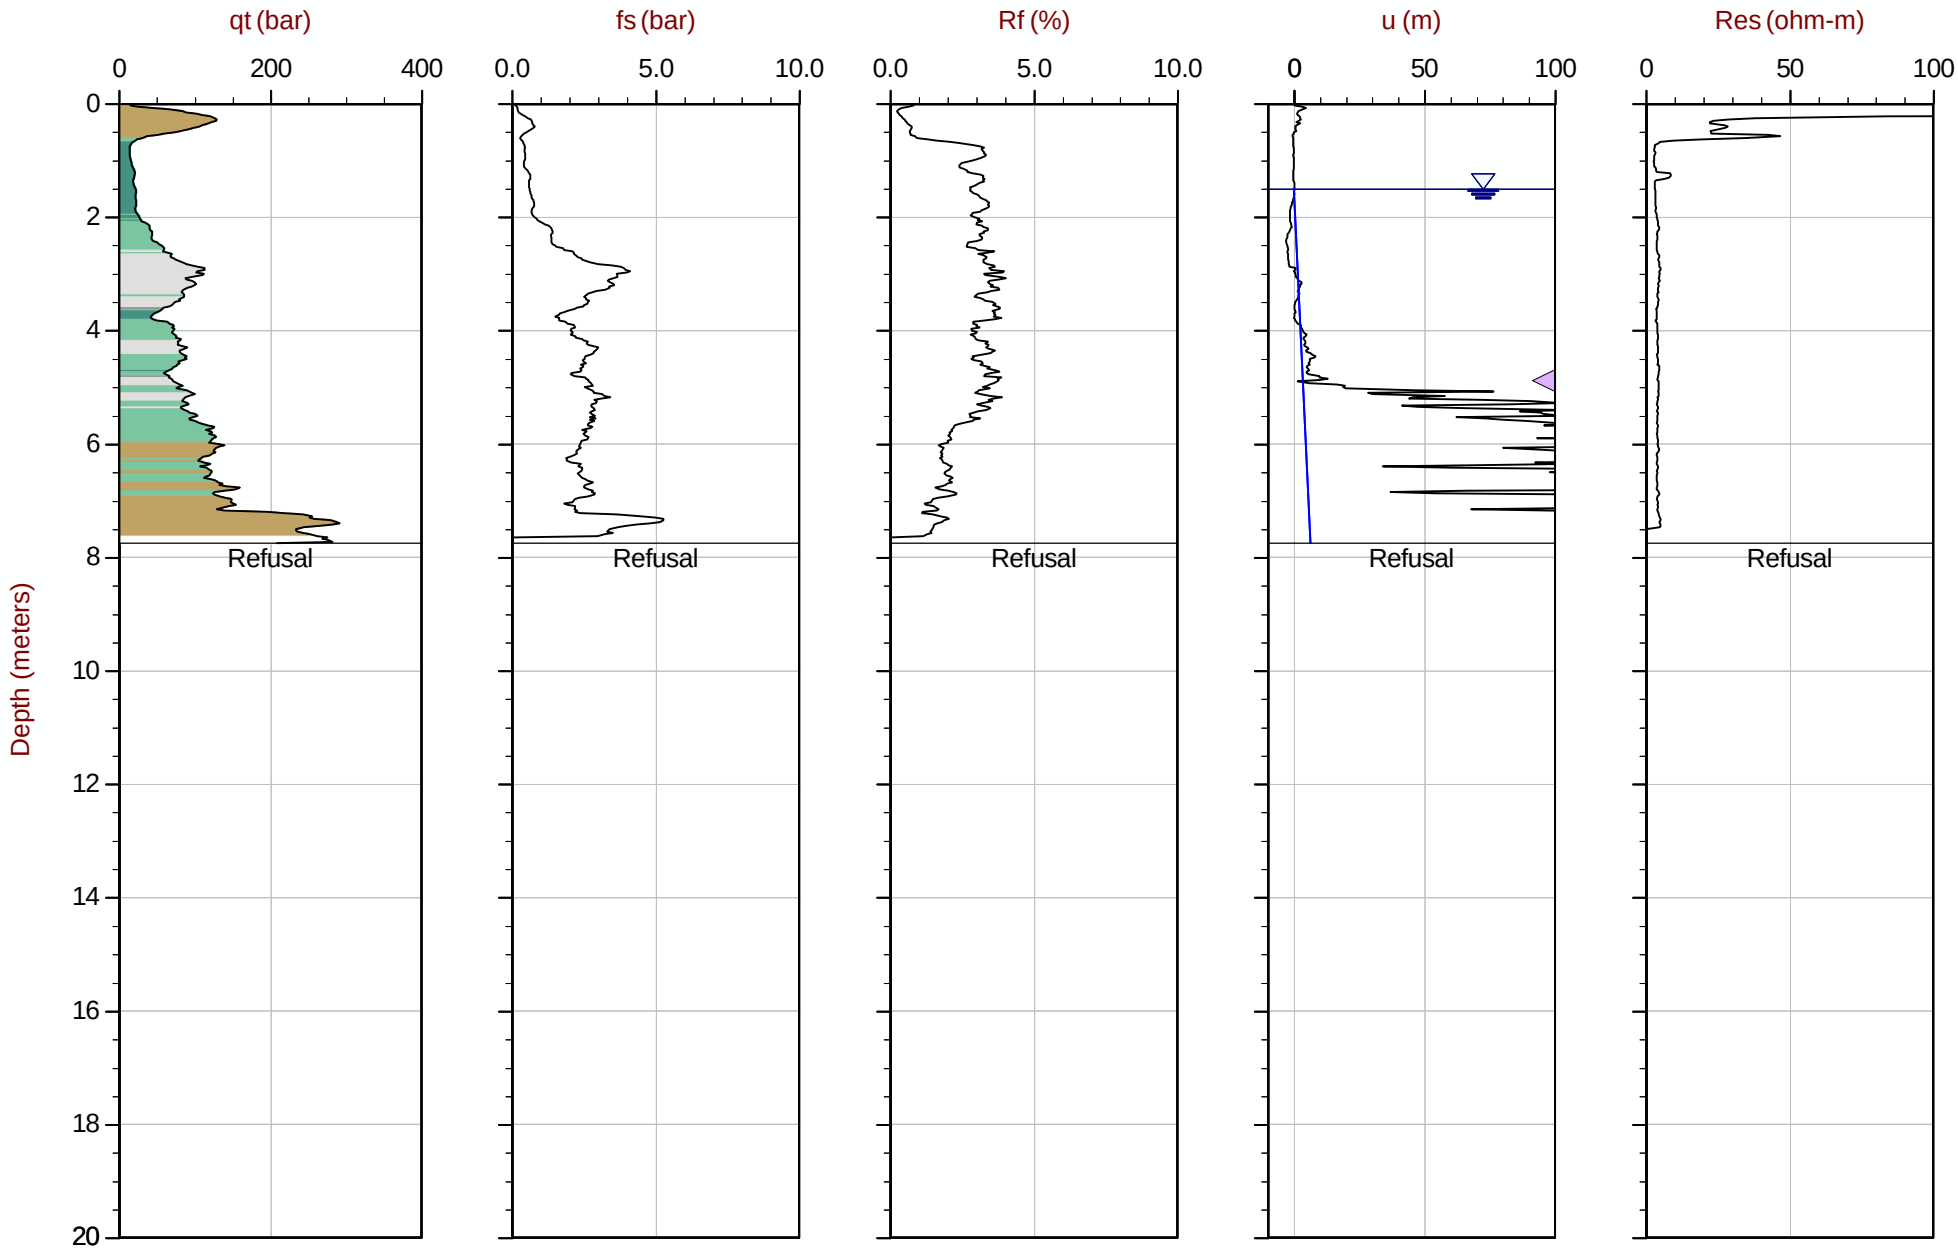

Max Depth: 7.750 m / 25.43 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT145.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612505m E: 416674m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 07:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT146
Cone: 651:T1500F15U35 Area= 15cm2

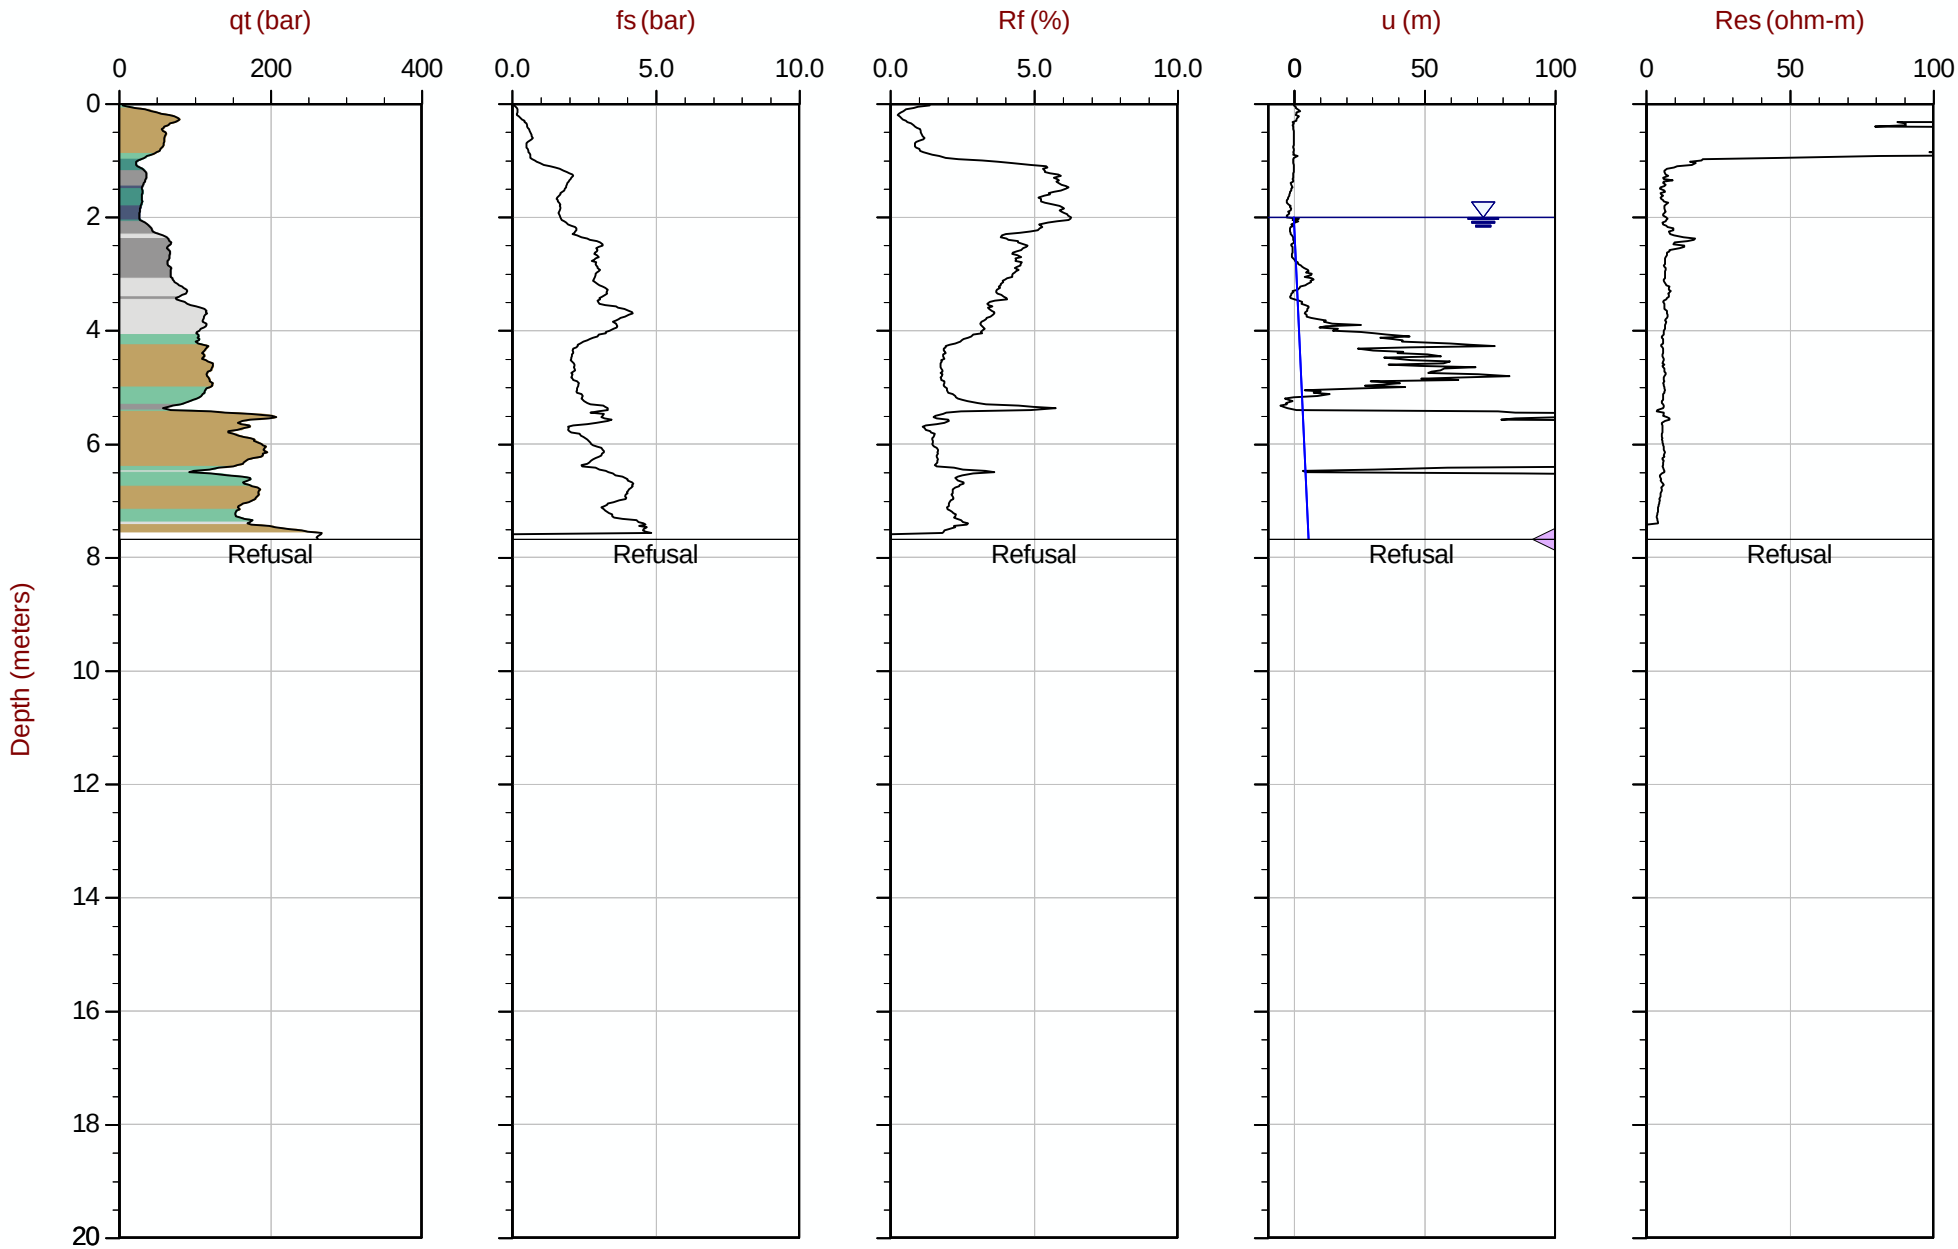

Max Depth: 7.675 m / 25.18 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT146.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612615m E: 414209m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 10:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT147
Cone: 651:T1500F15U35 Area= 15cm2

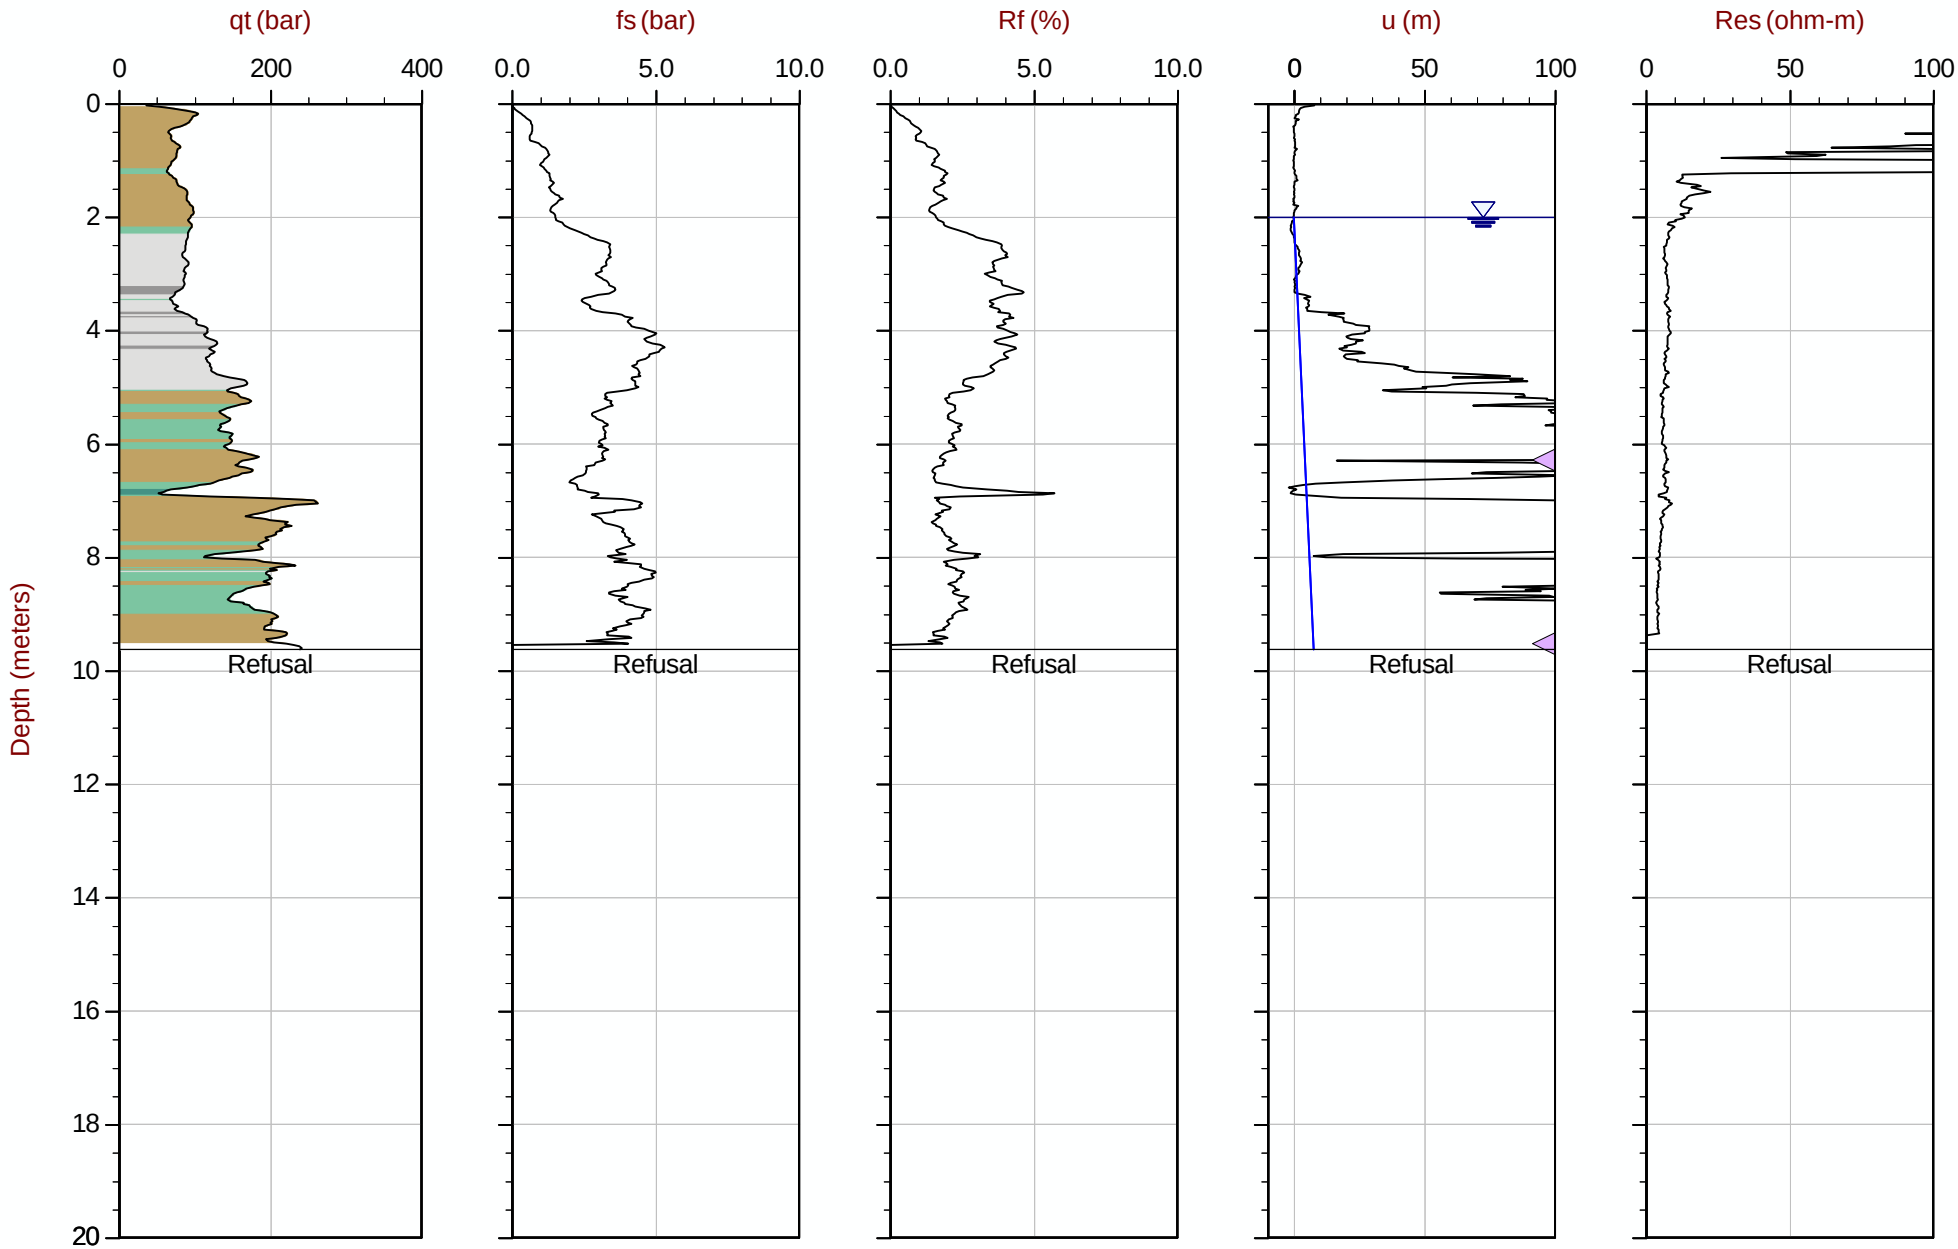

Max Depth: 9.625 m / 31.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT147.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612613m E: 414309m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 15:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT148
Cone: 750:T1500F15U35 Area= 15cm2

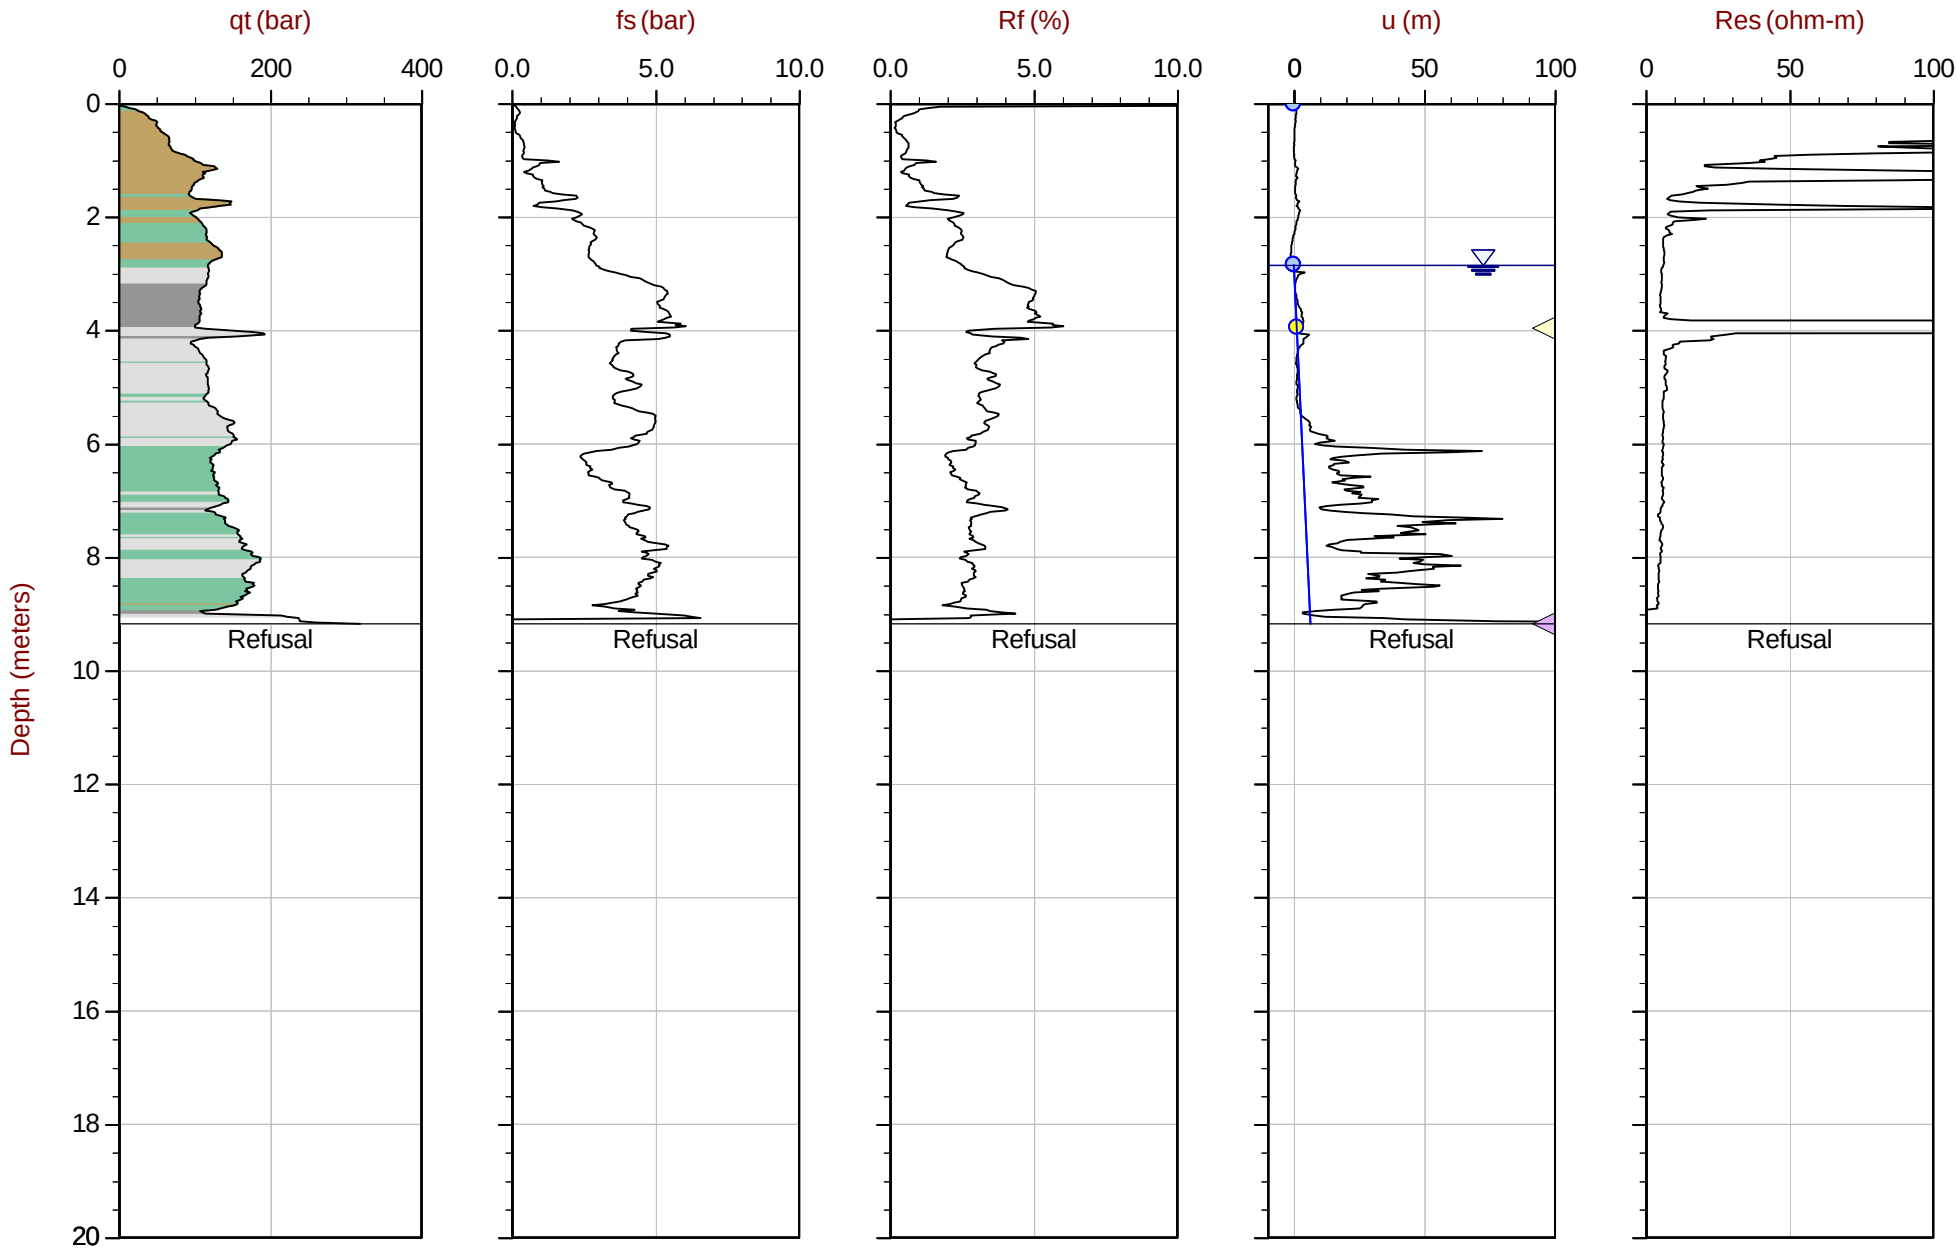

Max Depth: 9.175 m / 30.10 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT148.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612609m E: 414409m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 09:48
Site: Brooks, Alberta

Sounding: RCPT22-22CPT149
Cone: 750:T1500F15U35 Area= 15cm2

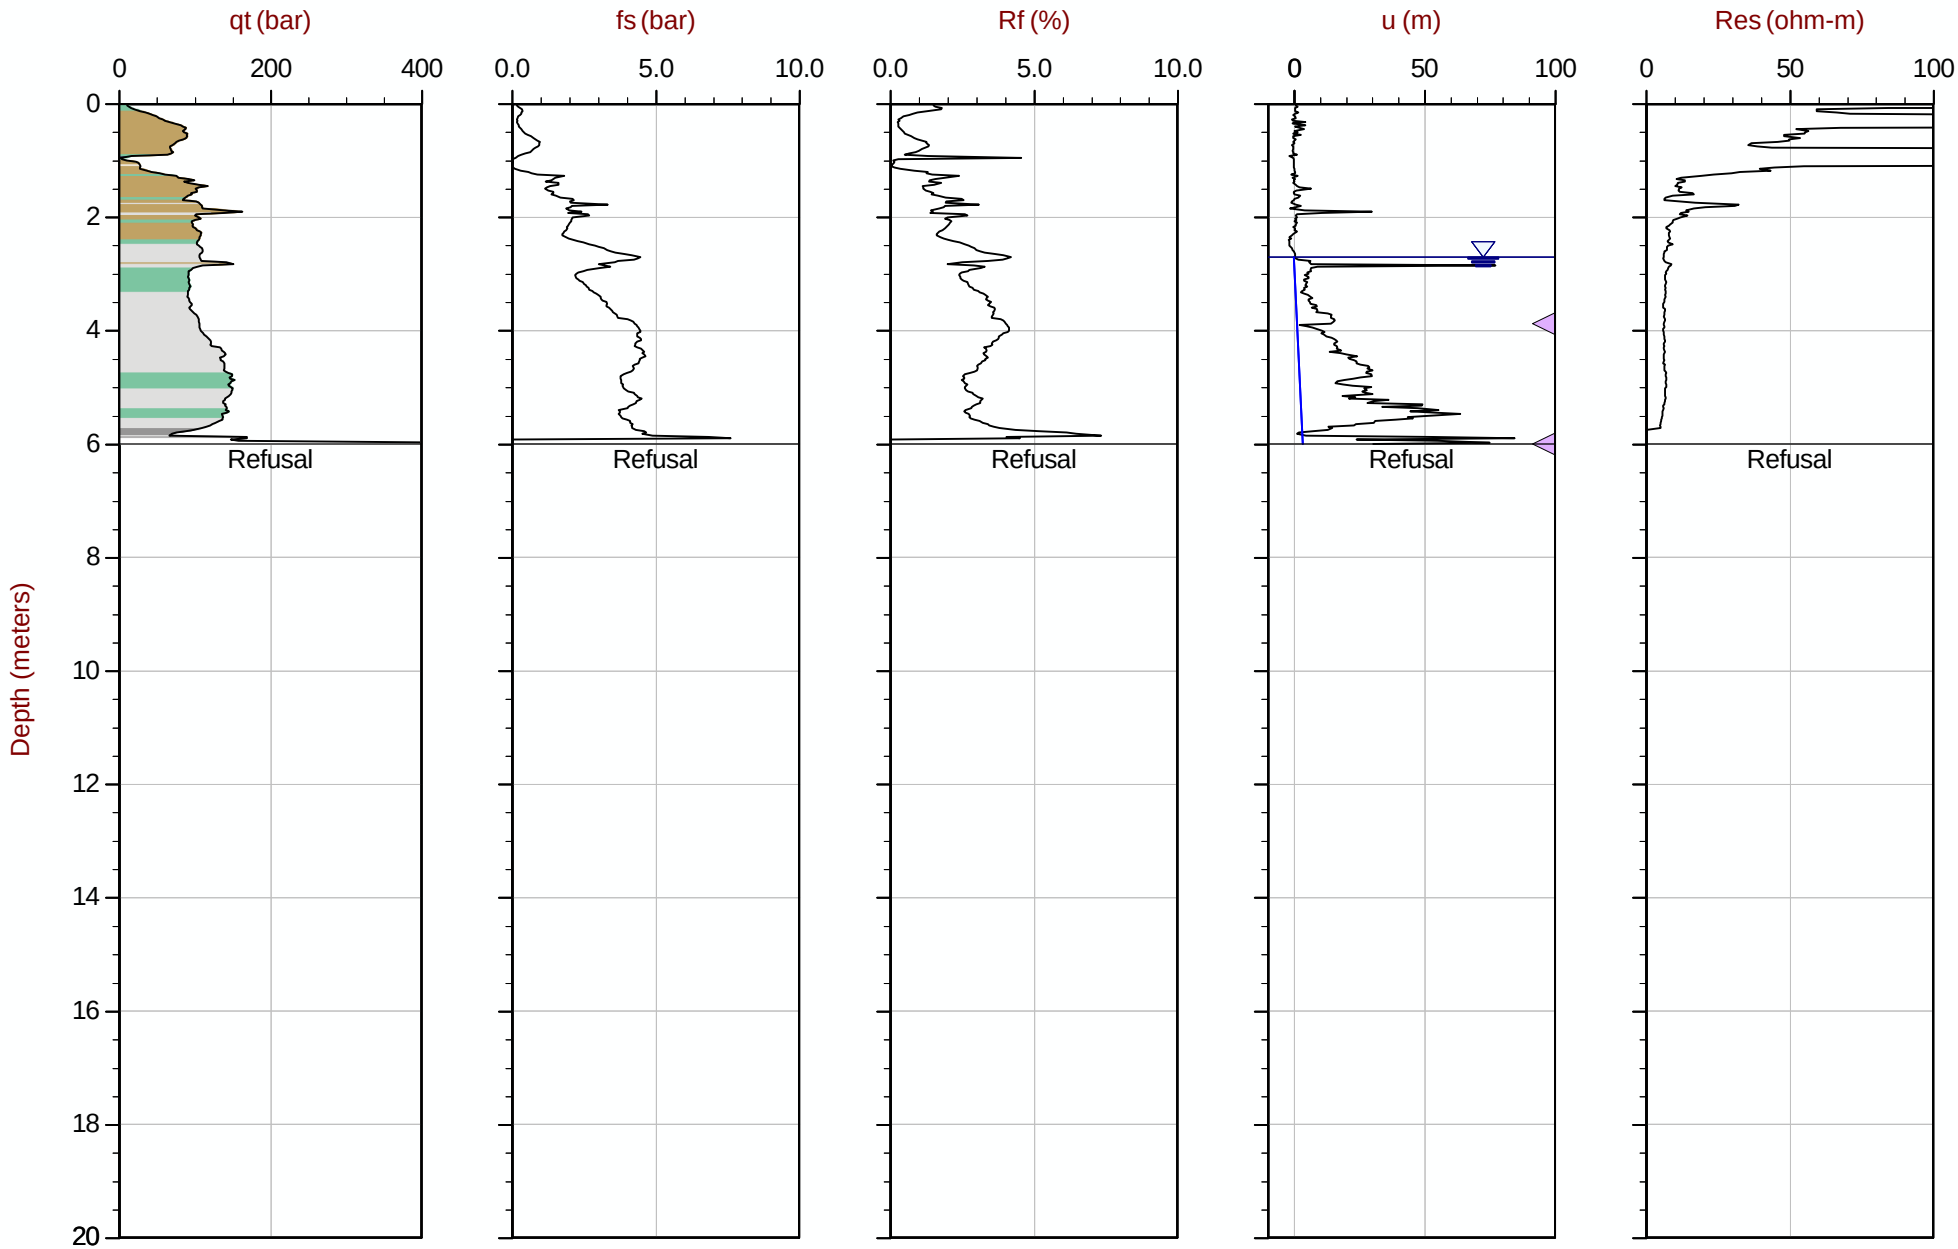

Max Depth: 6.000 m / 19.68 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT149.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612607m E: 414509m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 07:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT150
Cone: 750:T1500F15U35 Area= 15cm2

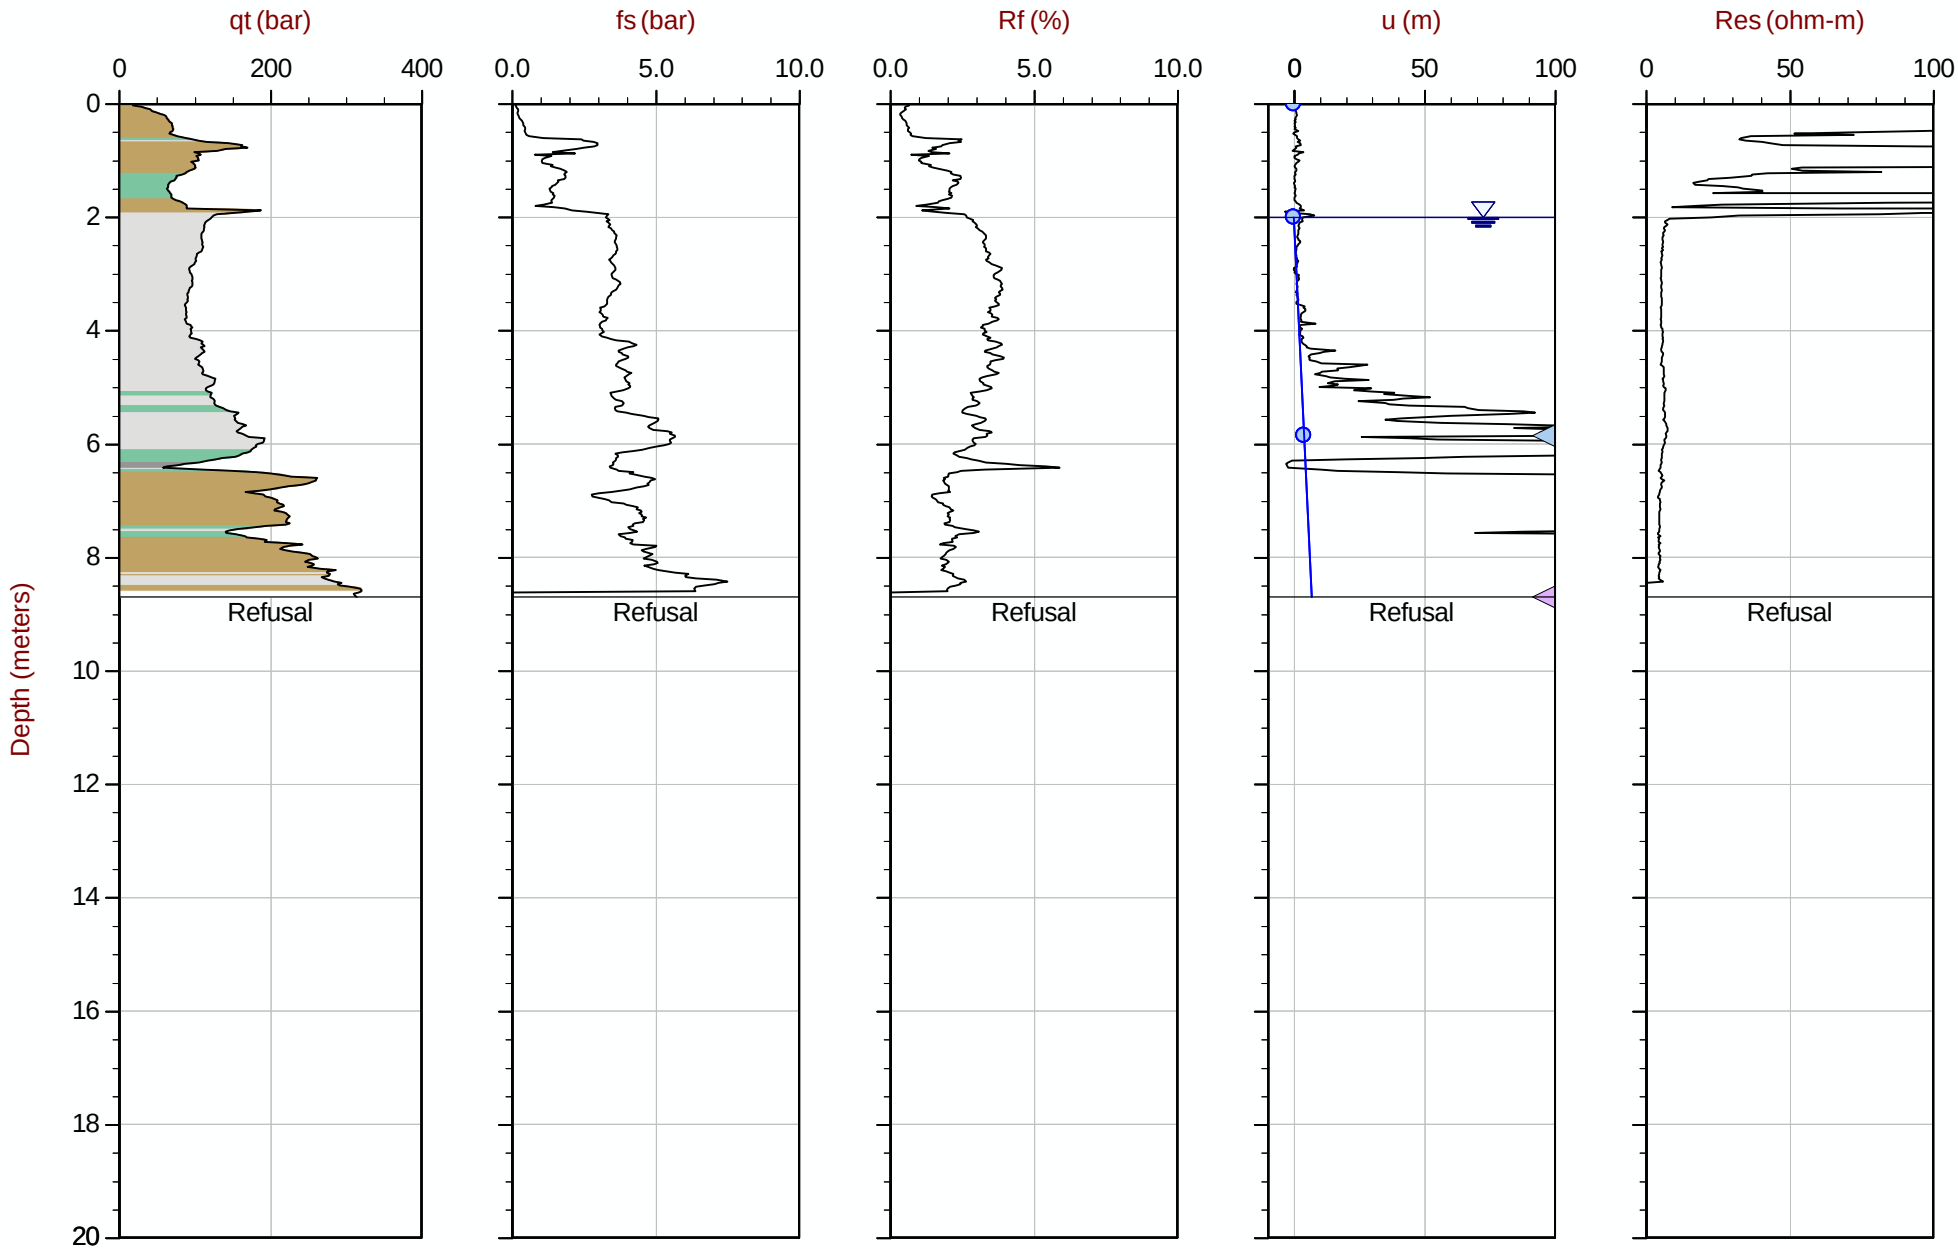

Max Depth: 8.700 m / 28.54 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT150.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612610m E: 414609m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 15:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT151
Cone: 750:T1500F15U35 Area= 15cm2

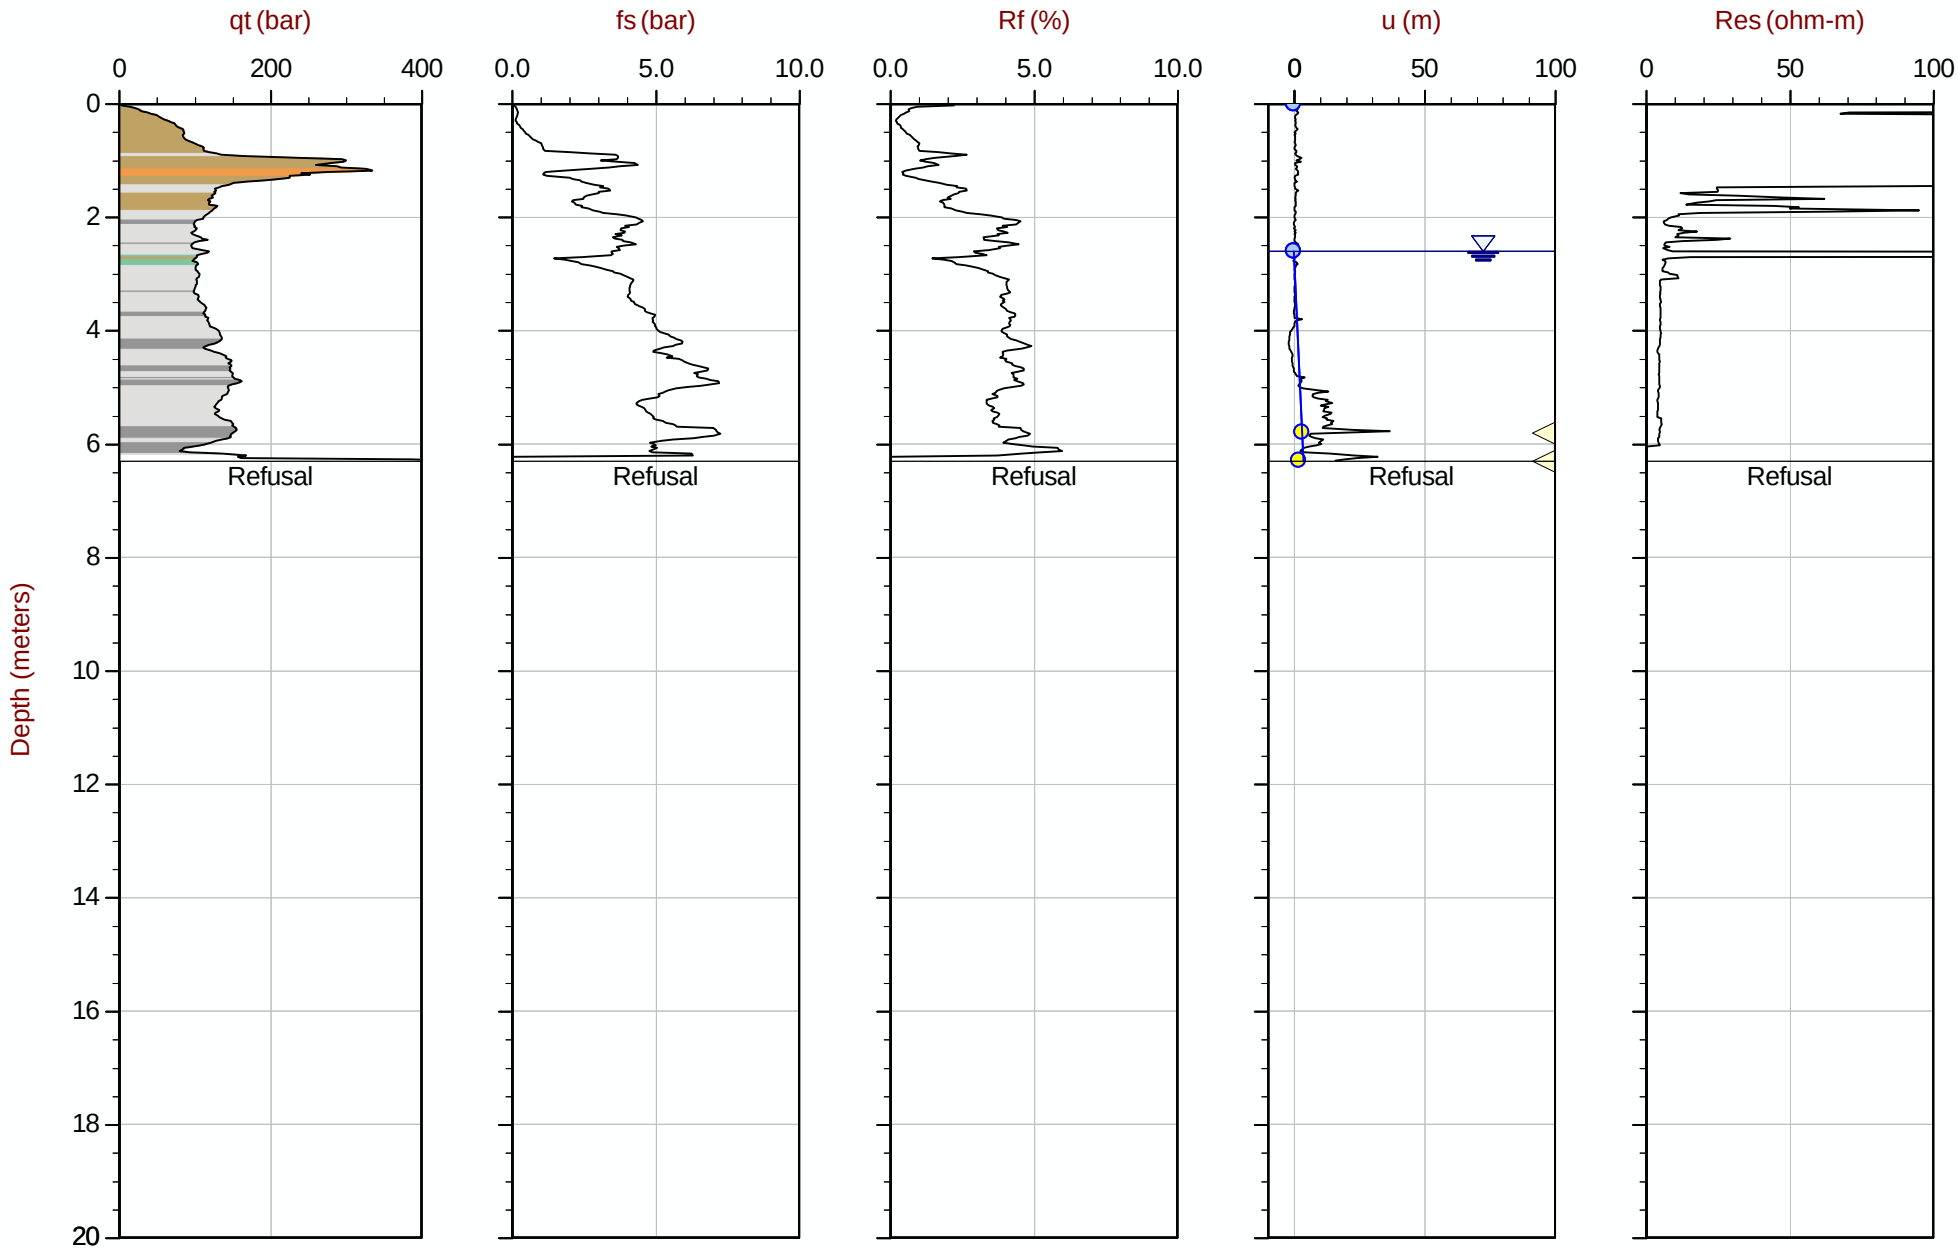

Max Depth: 6.300 m / 20.67 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT151.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612606m E: 414709m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 13:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT152
Cone: 750:T1500F15U35 Area= 15cm2

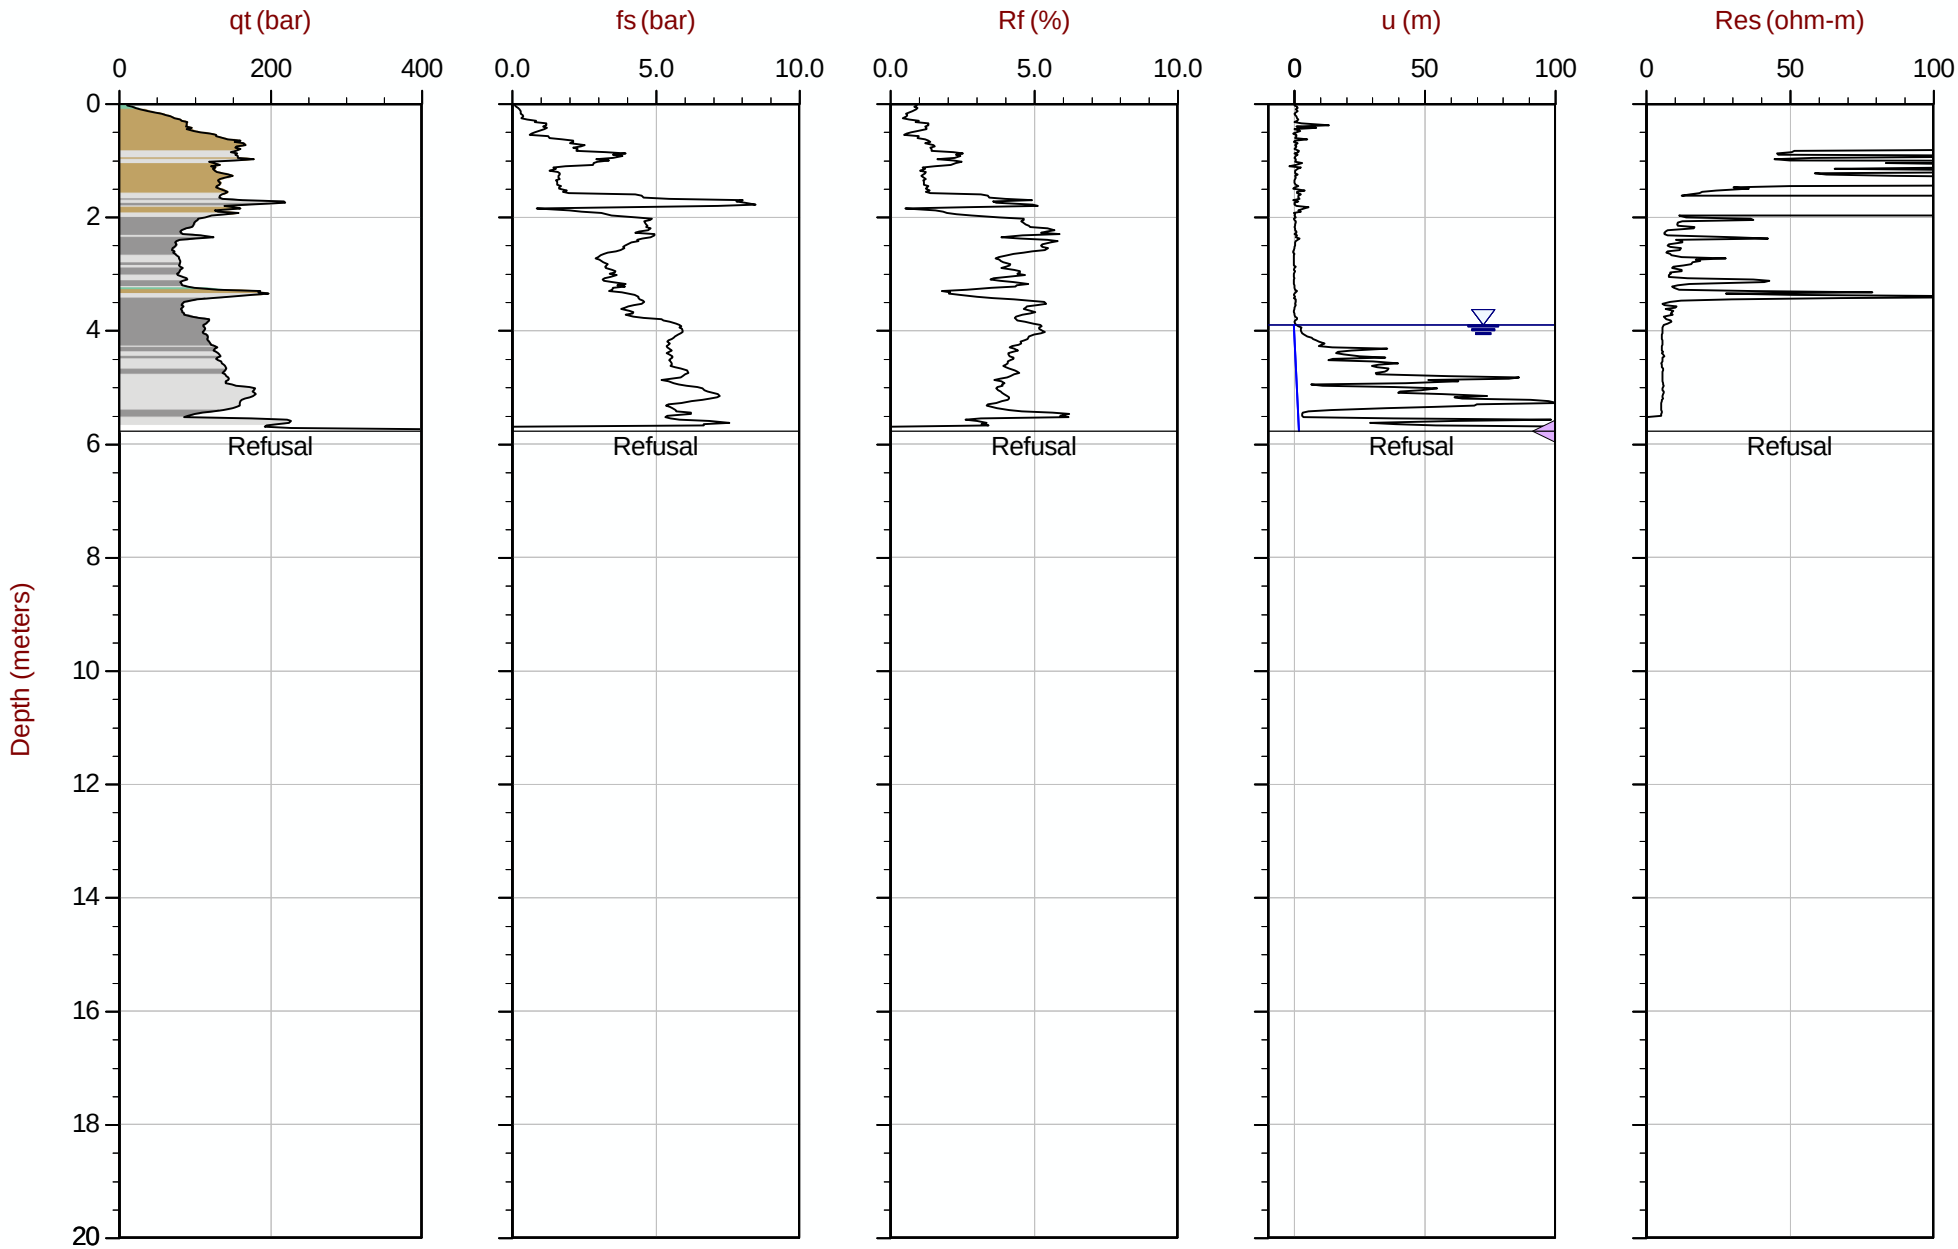

Max Depth: 5.775 m / 18.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT152.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612603m E: 414809m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 10:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT153
Cone: 750:T1500F15U35 Area= 15cm2

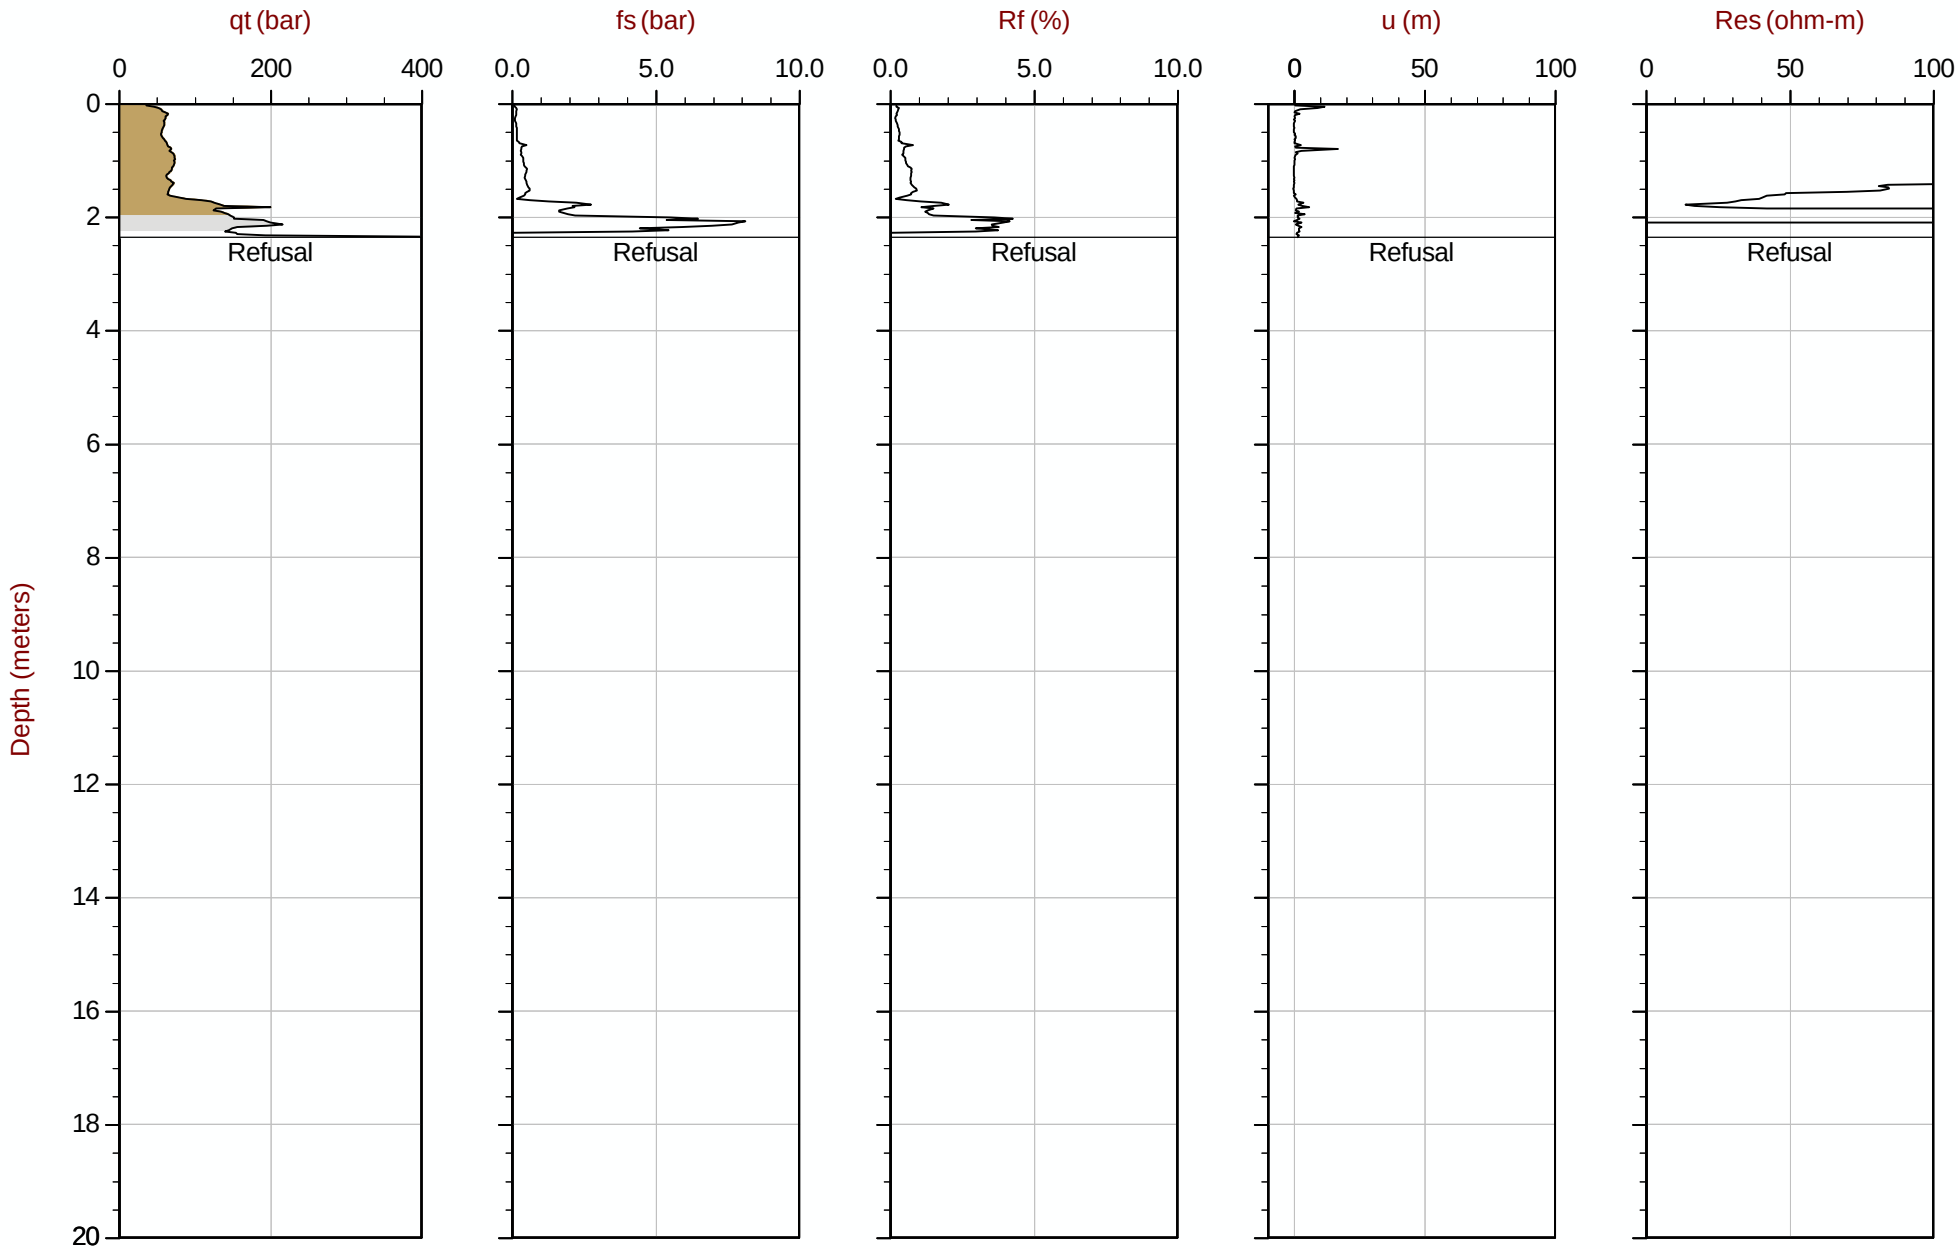

Max Depth: 2.350 m / 7.71 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT153.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612604m E: 414909m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 10:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT153A
Cone: 750:T1500F15U35 Area= 15cm2

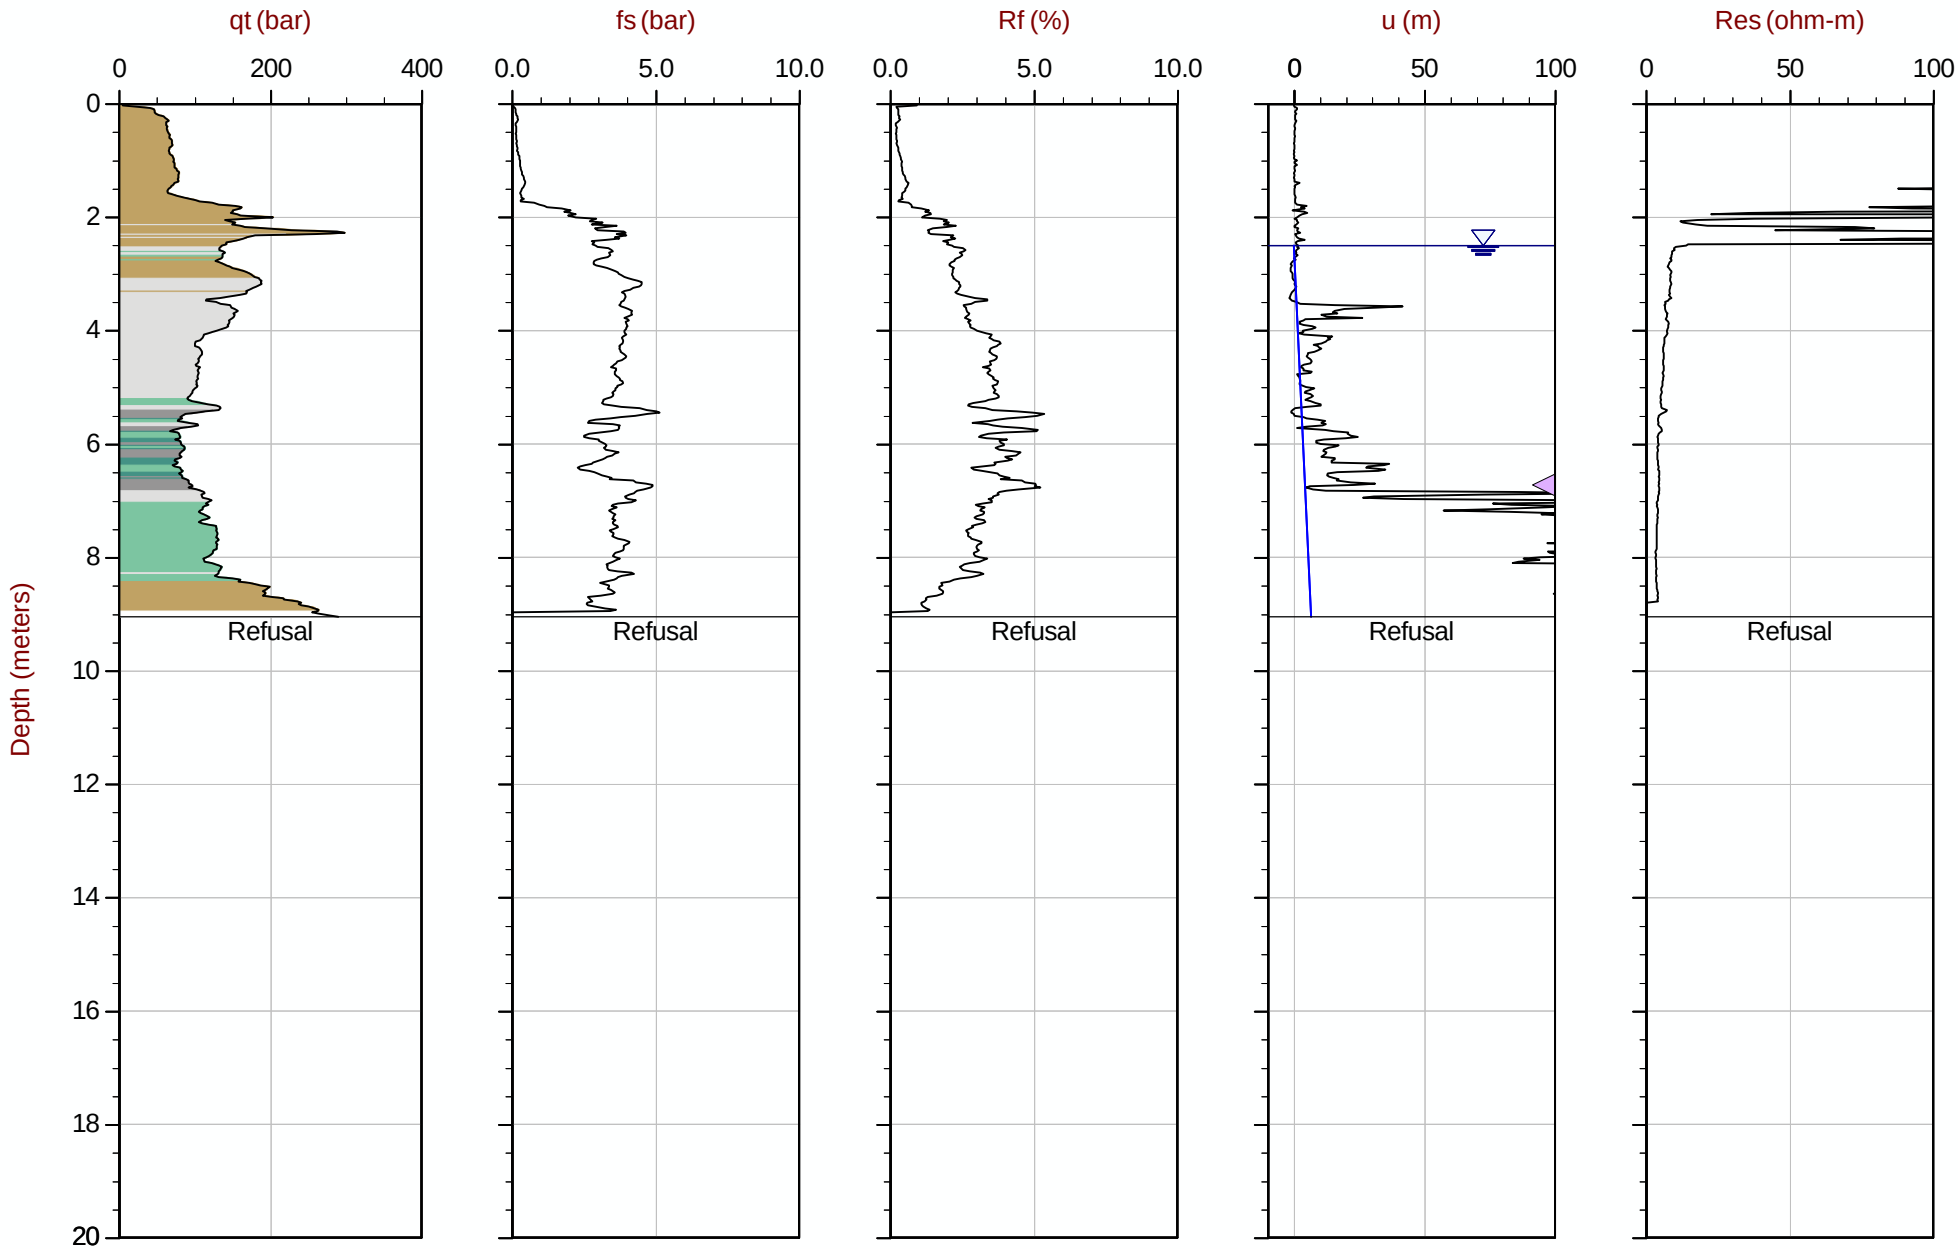

Max Depth: 9.050 m / 29.69 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT153A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612604m E: 414909m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 07:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT154
Cone: 750:T1500F15U35 Area= 15cm2

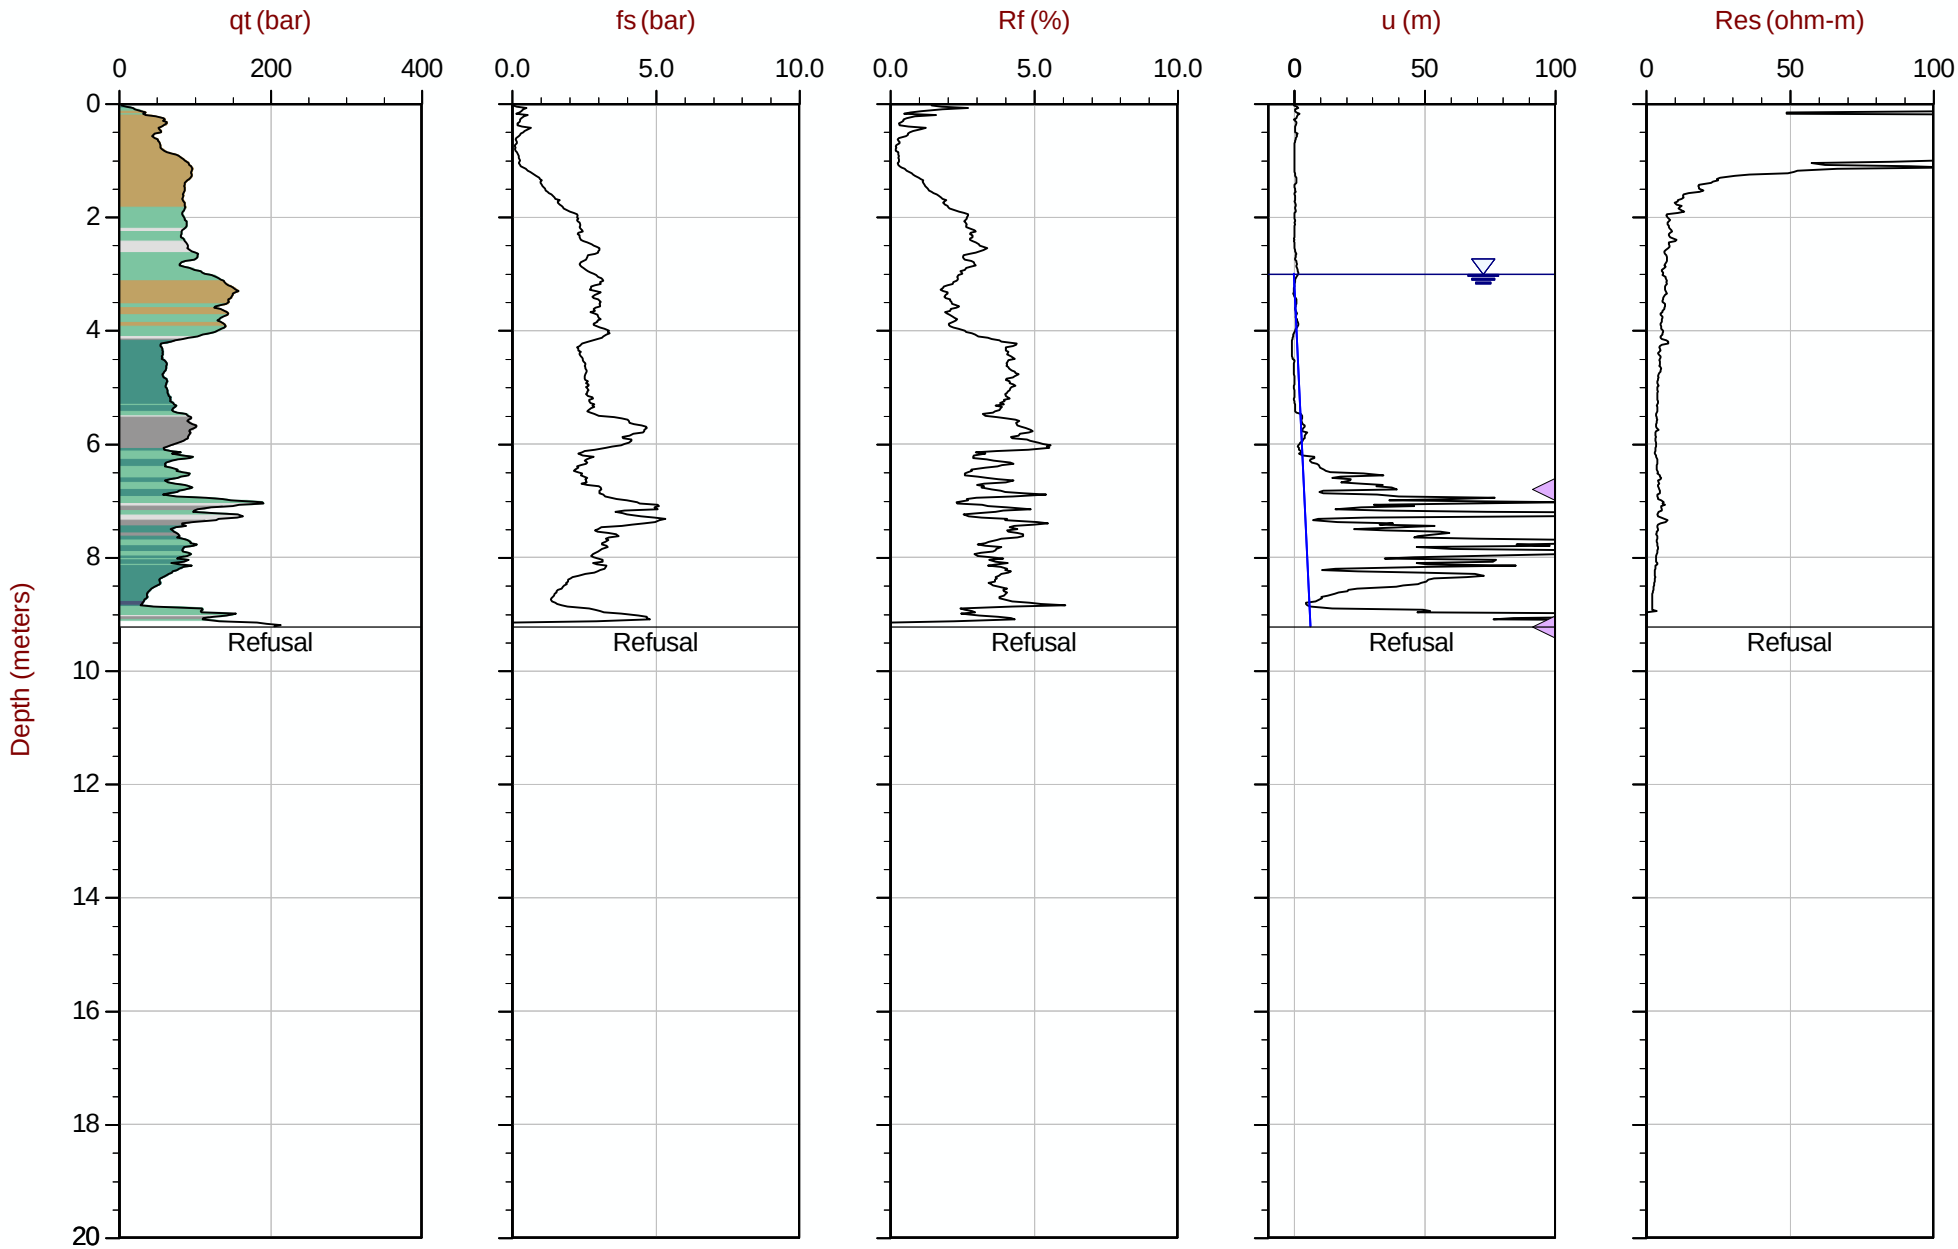

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT154.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612607m E: 414509m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 12:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT155
Cone: 750:T1500F15U35 Area= 15cm2

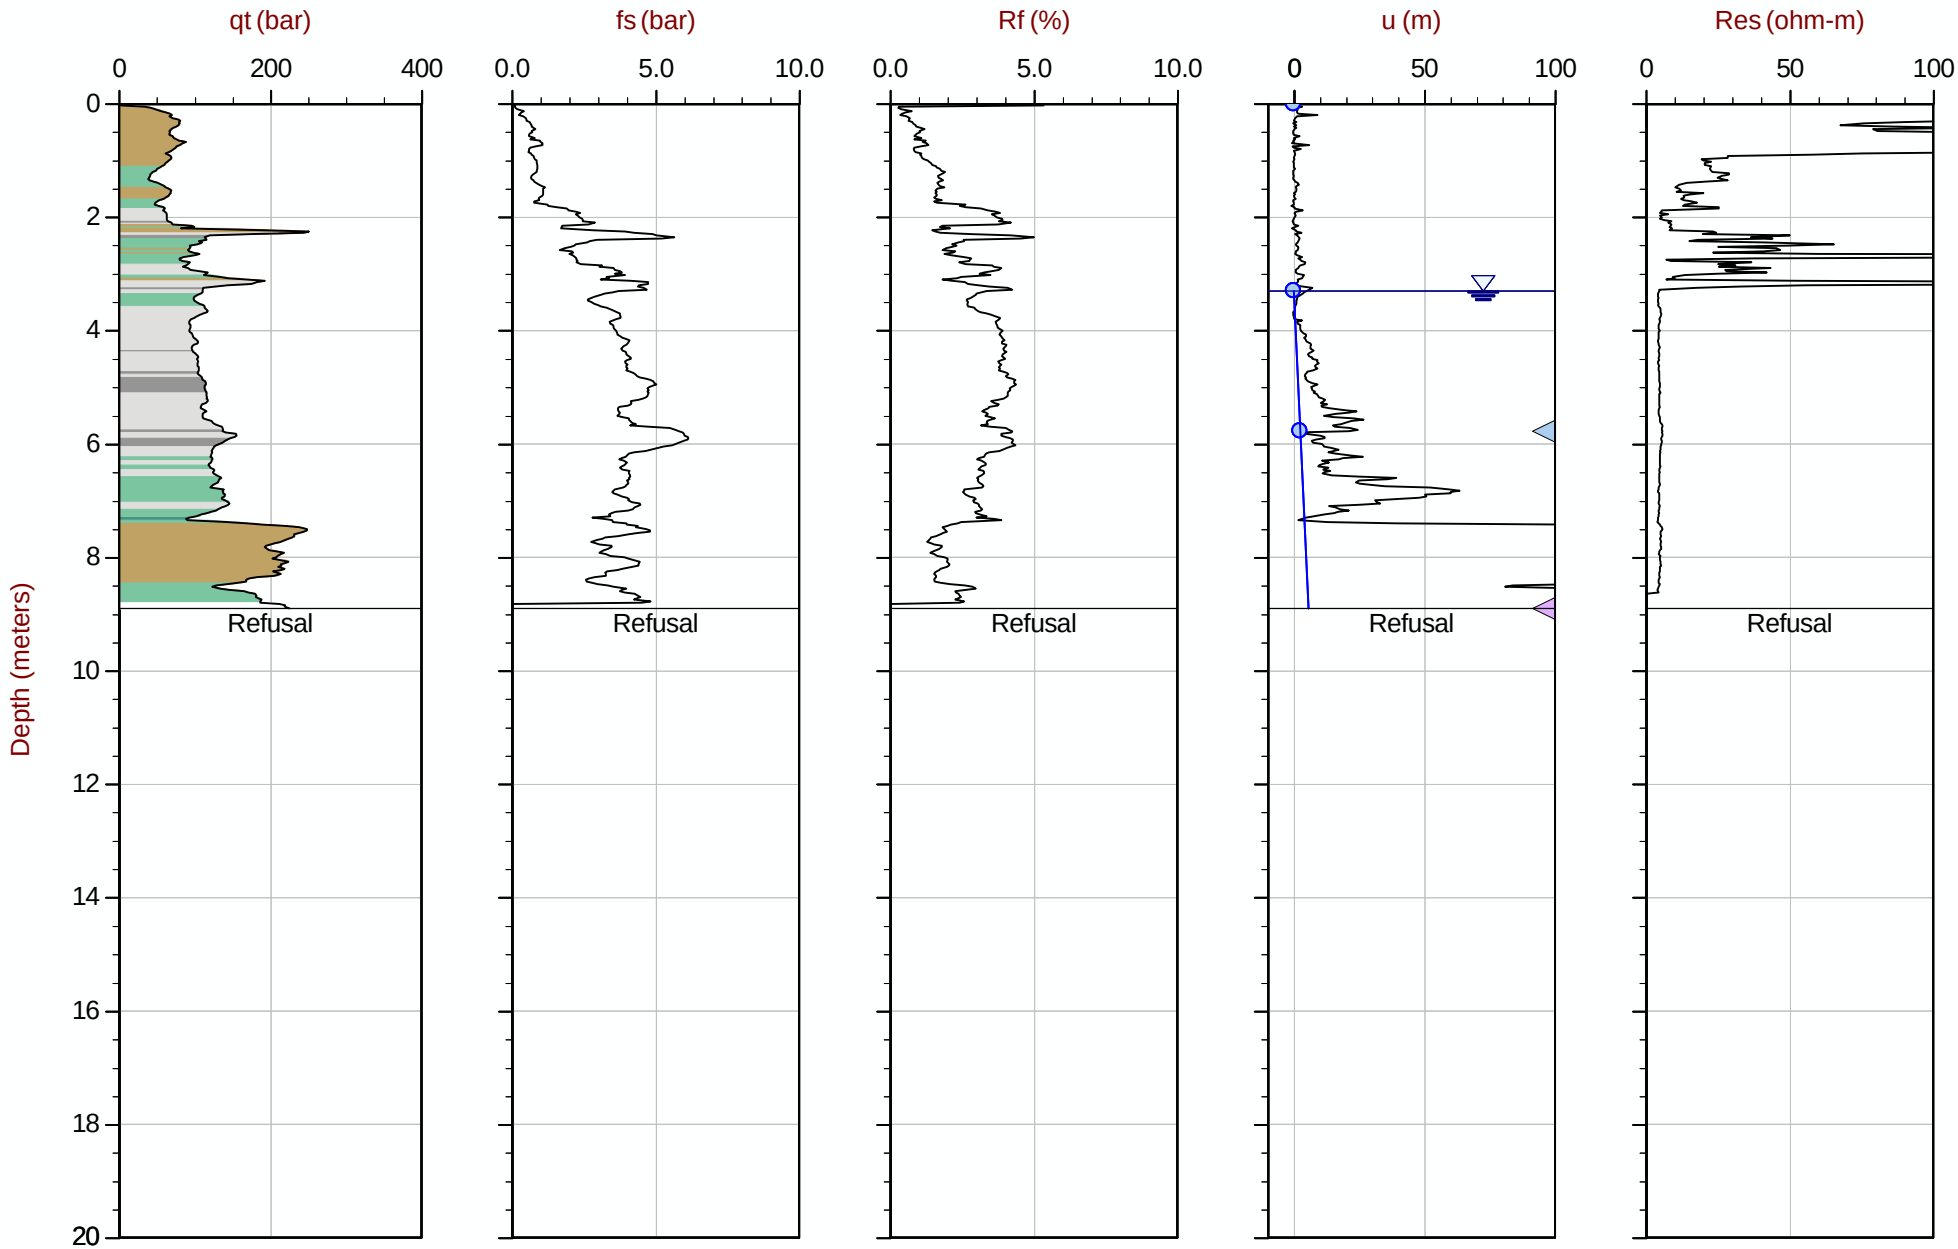

Max Depth: 8.900 m / 29.20 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT155.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612604m E: 415110m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT156
Cone: 750:T1500F15U35 Area= 15cm2

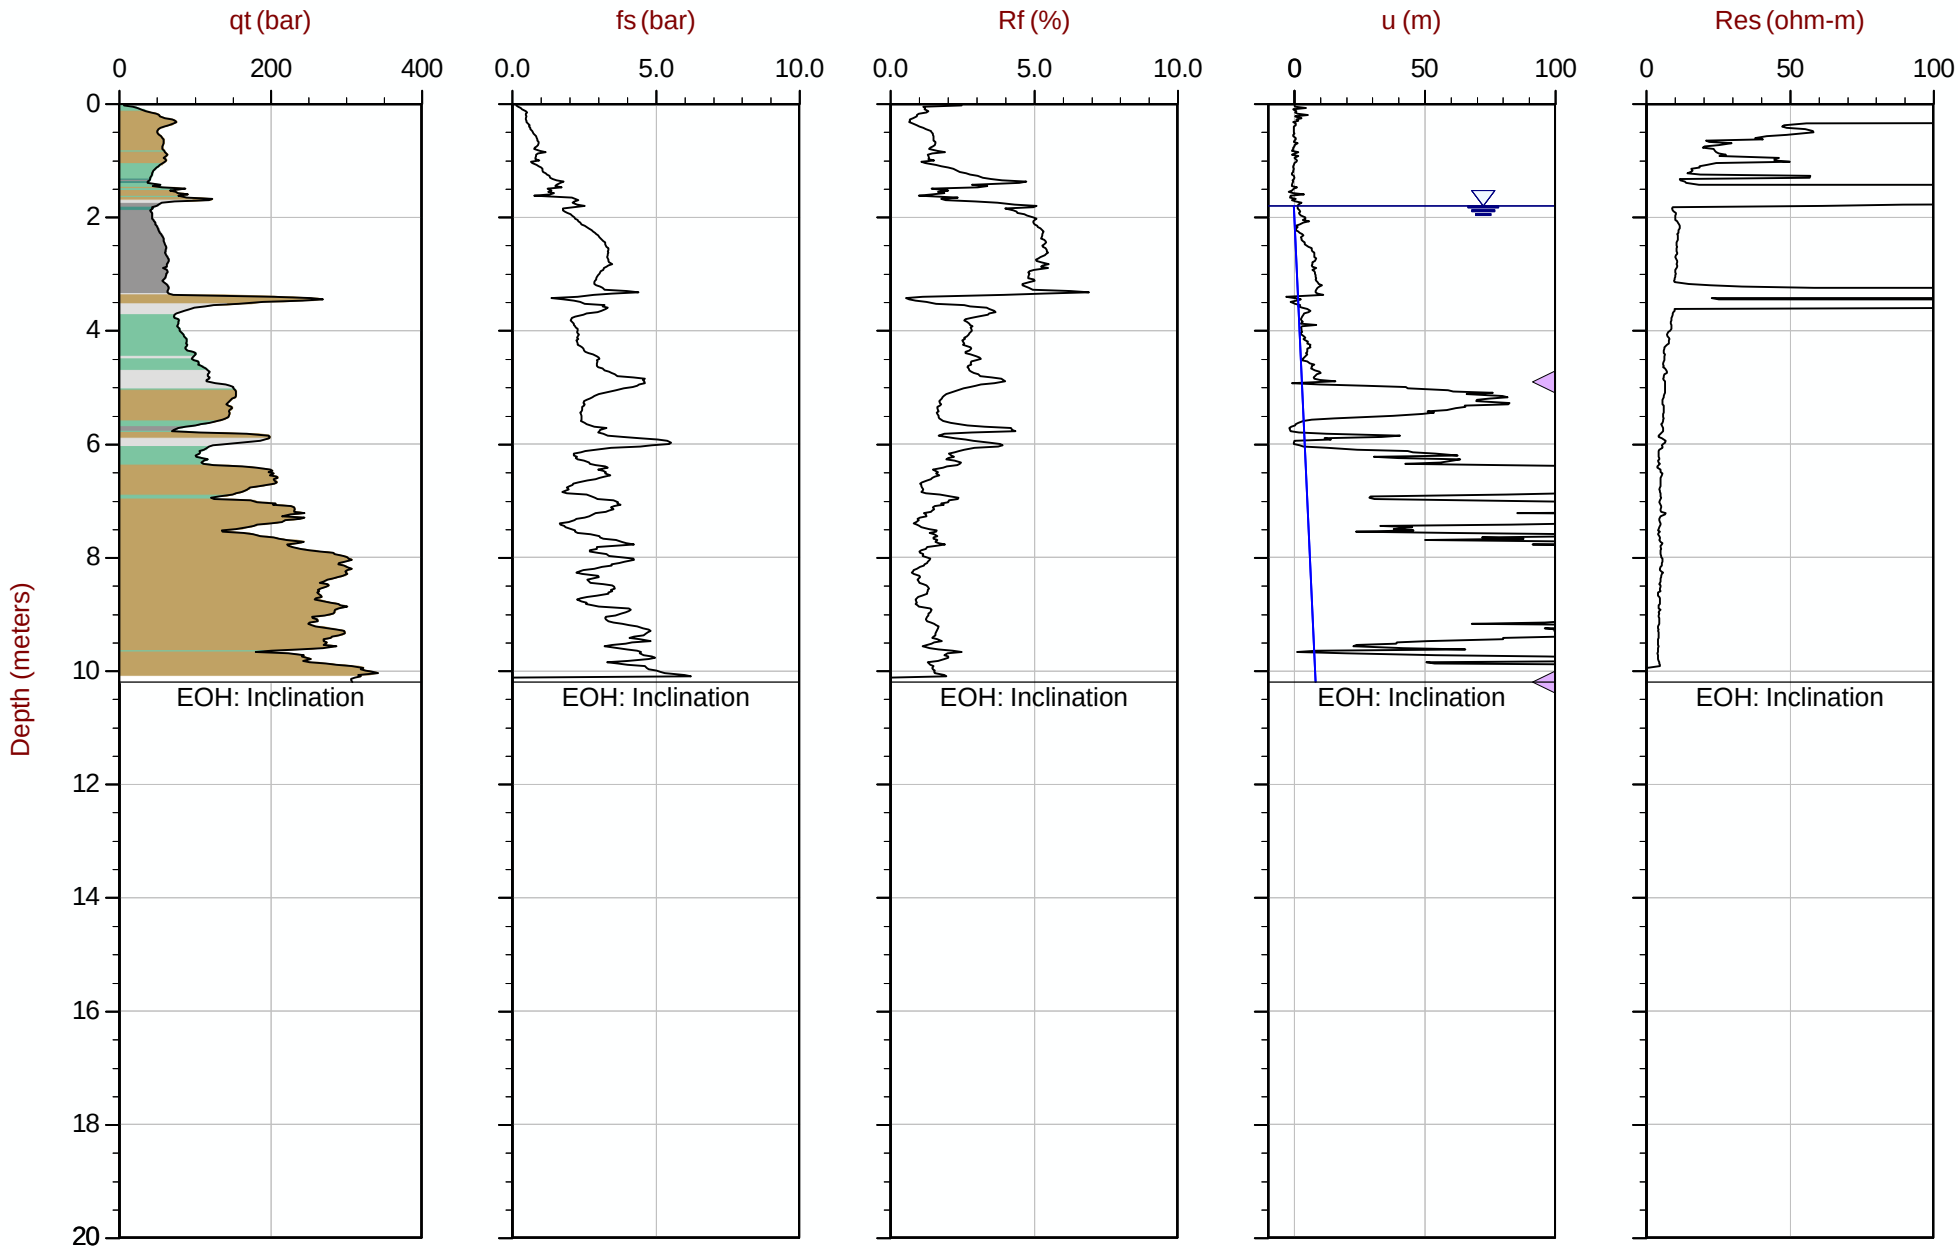

Max Depth: 10.200 m / 33.46 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT156.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612602m E: 415210m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT157
Cone: 750:T1500F15U35 Area= 15cm2

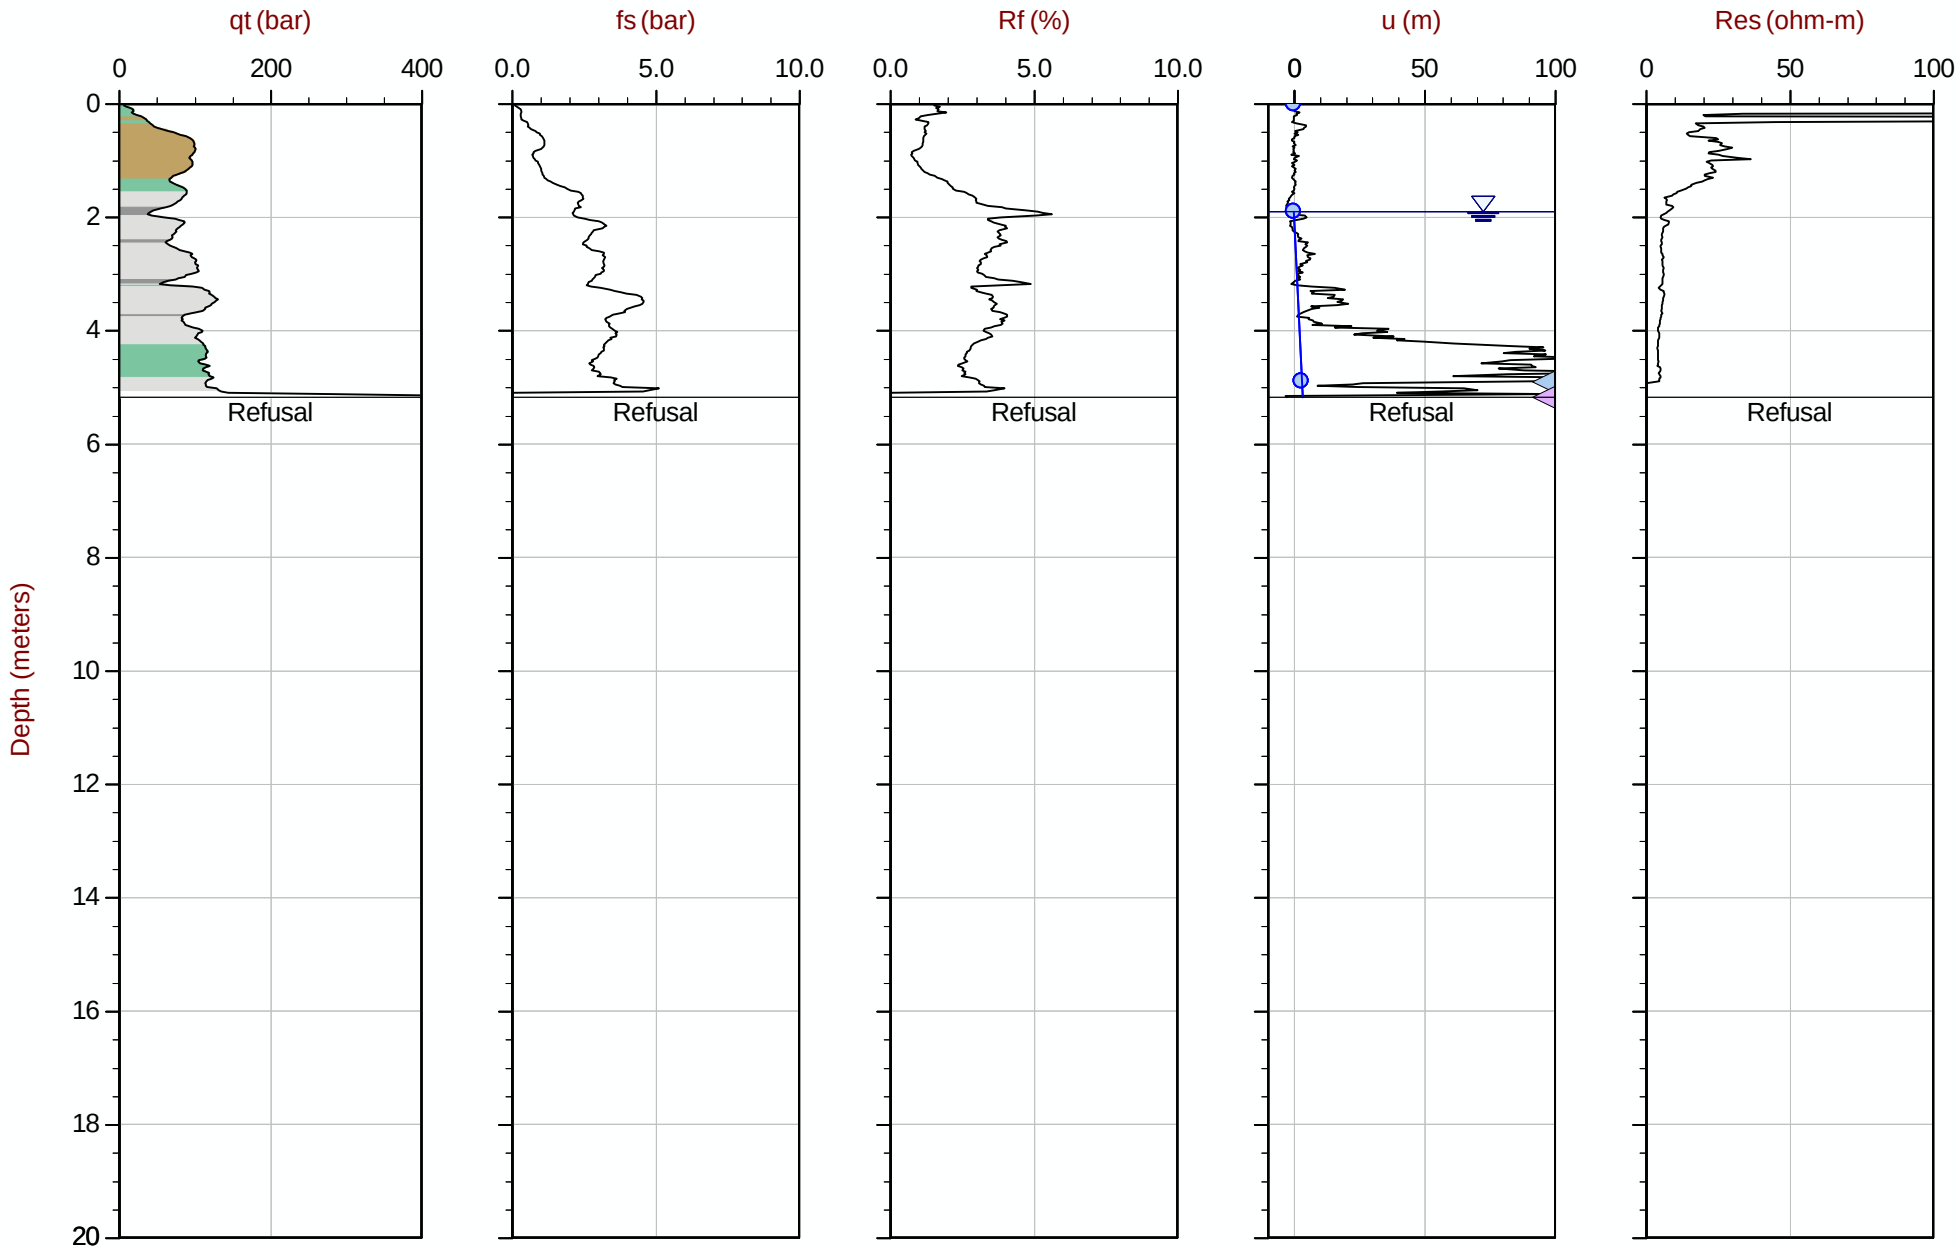

Max Depth: 5.175 m / 16.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT157.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 415311m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 15:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT158
Cone: 750:T1500F15U35 Area= 15cm2

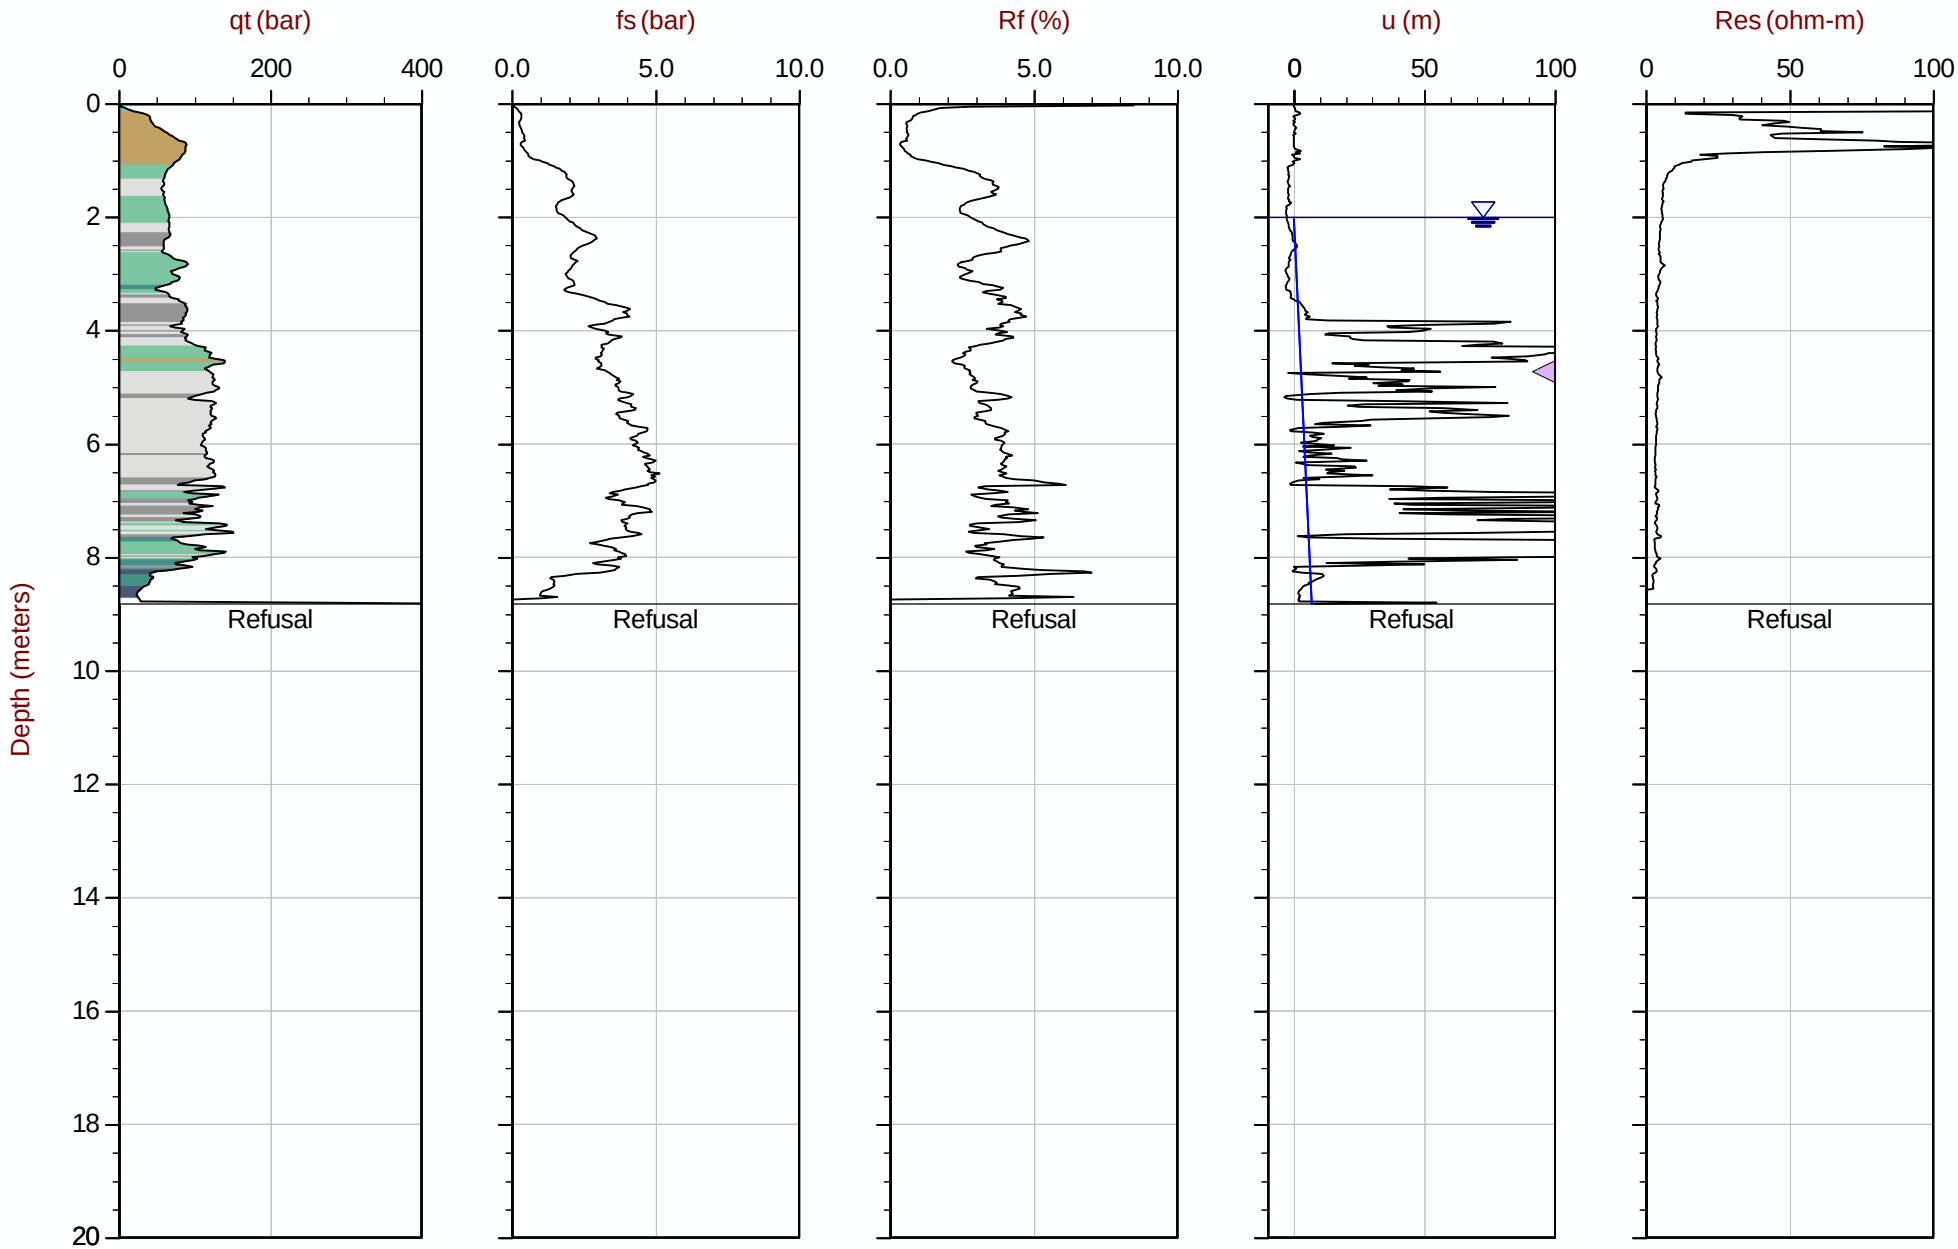

Max Depth: 8.825 m / 28.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT158.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612590m E: 415411m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 12:12
Site: Brooks, Alberta

Sounding: RCPT22-22CPT160
Cone: 822:T1000F10U35 Area= 15cm2

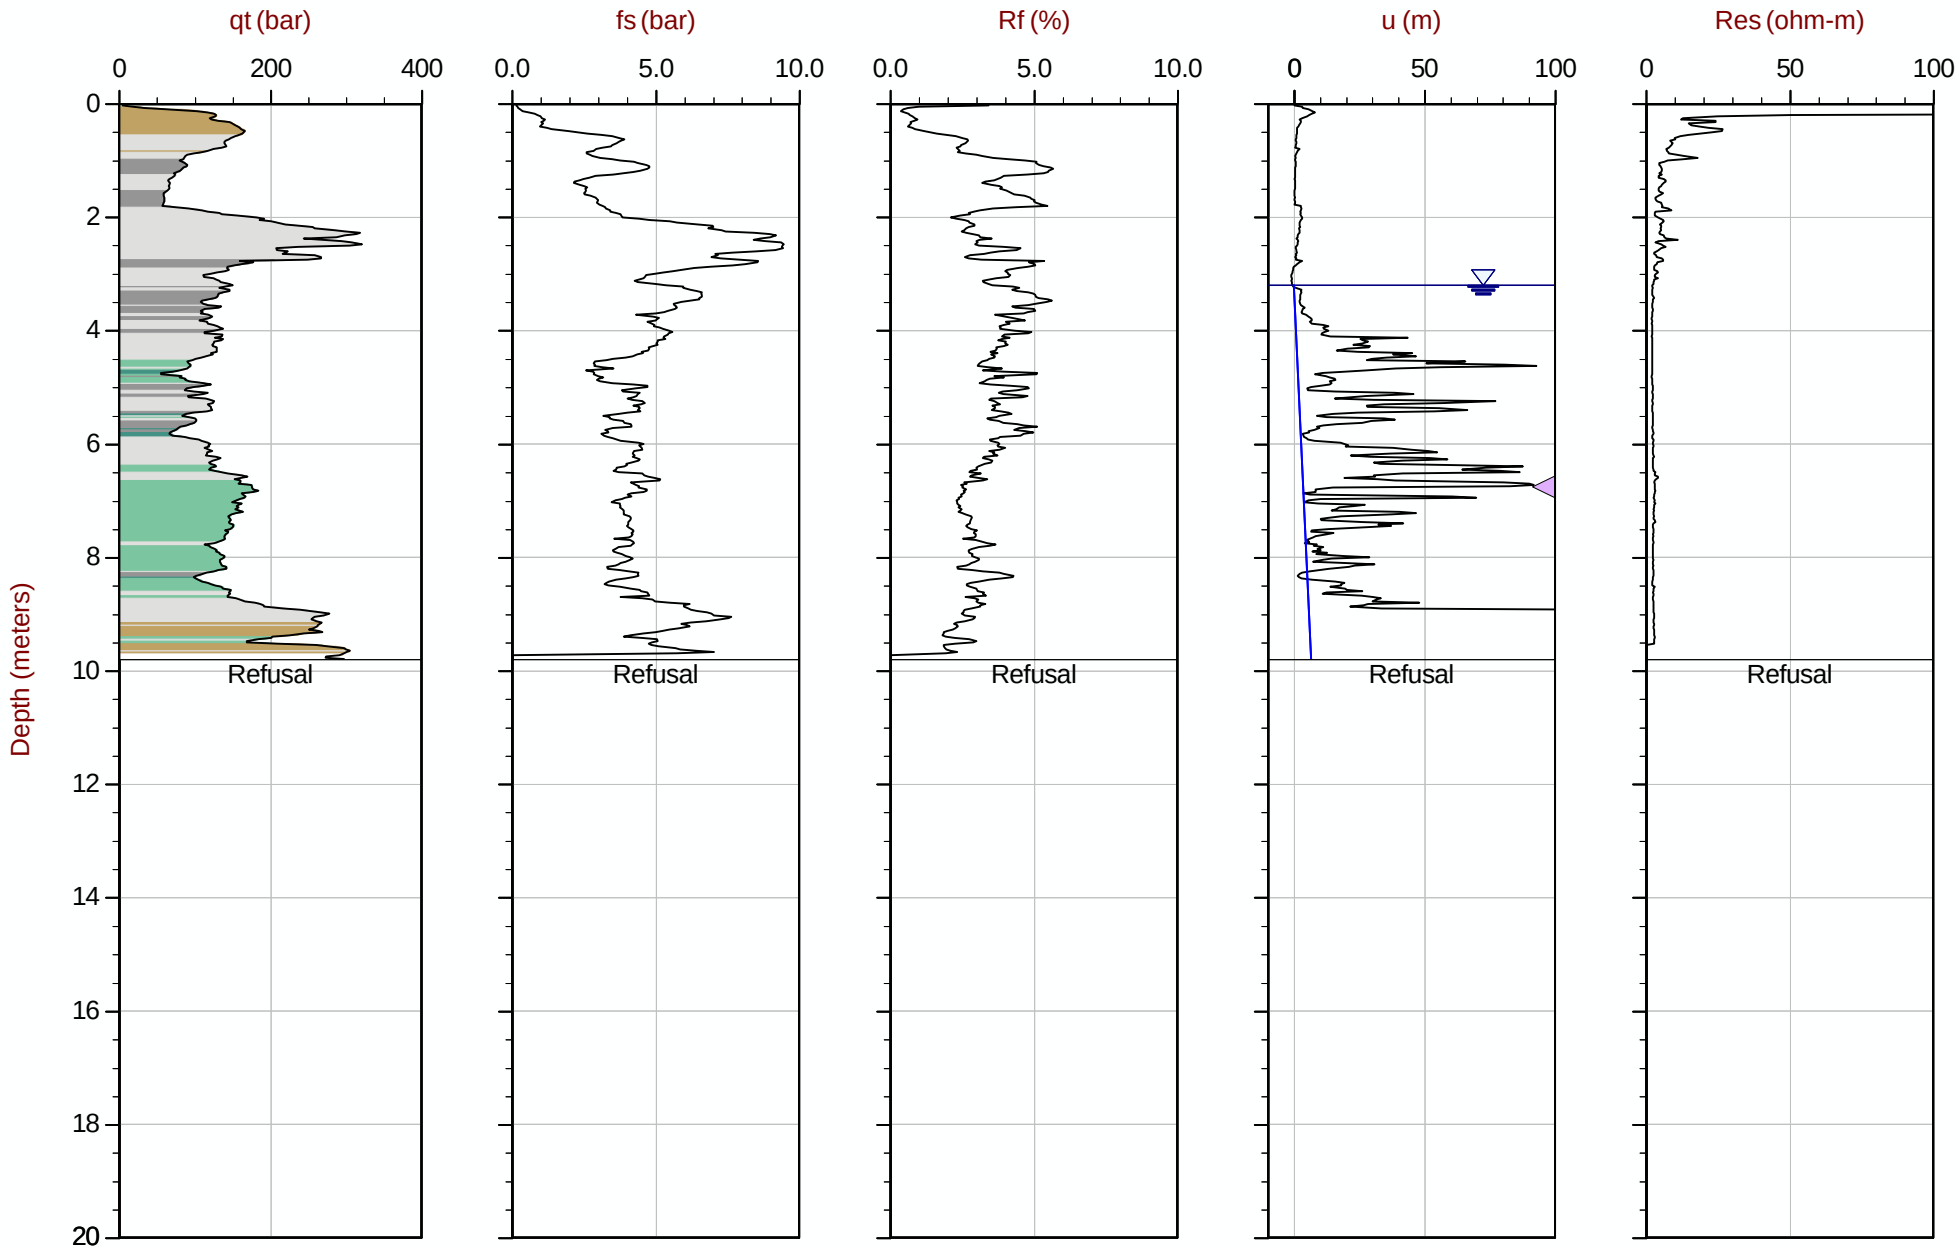

Max Depth: 9.800 m / 32.15 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT160.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612584m E: 415609m Elev: 771.024m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 13:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161
Cone: 750:T1500F15U35 Area= 15cm2

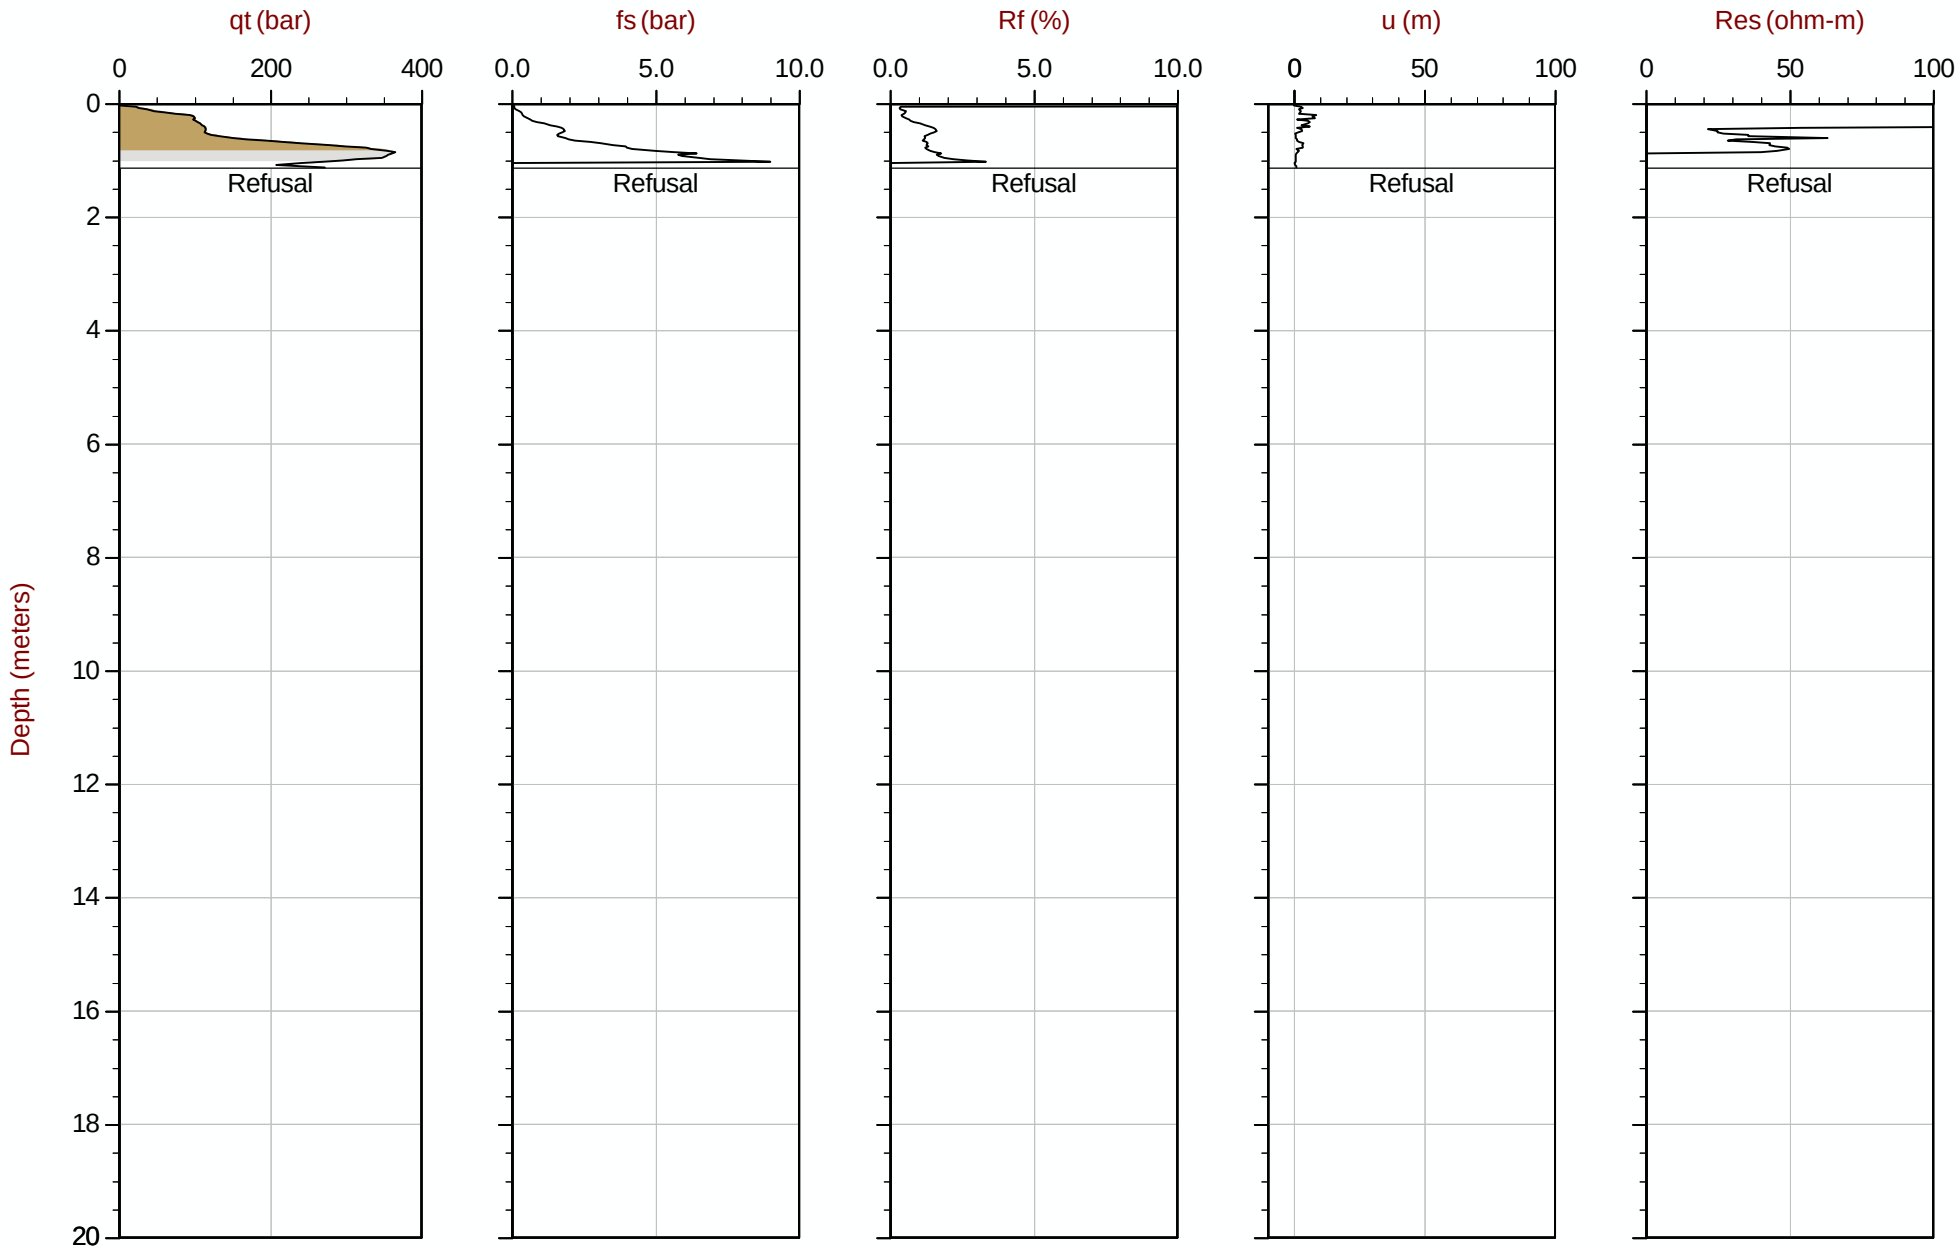

Max Depth: 1.125 m / 3.69 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT161.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612582m E: 415708m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 13:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161A
Cone: 750:T1500F15U35 Area= 15cm2

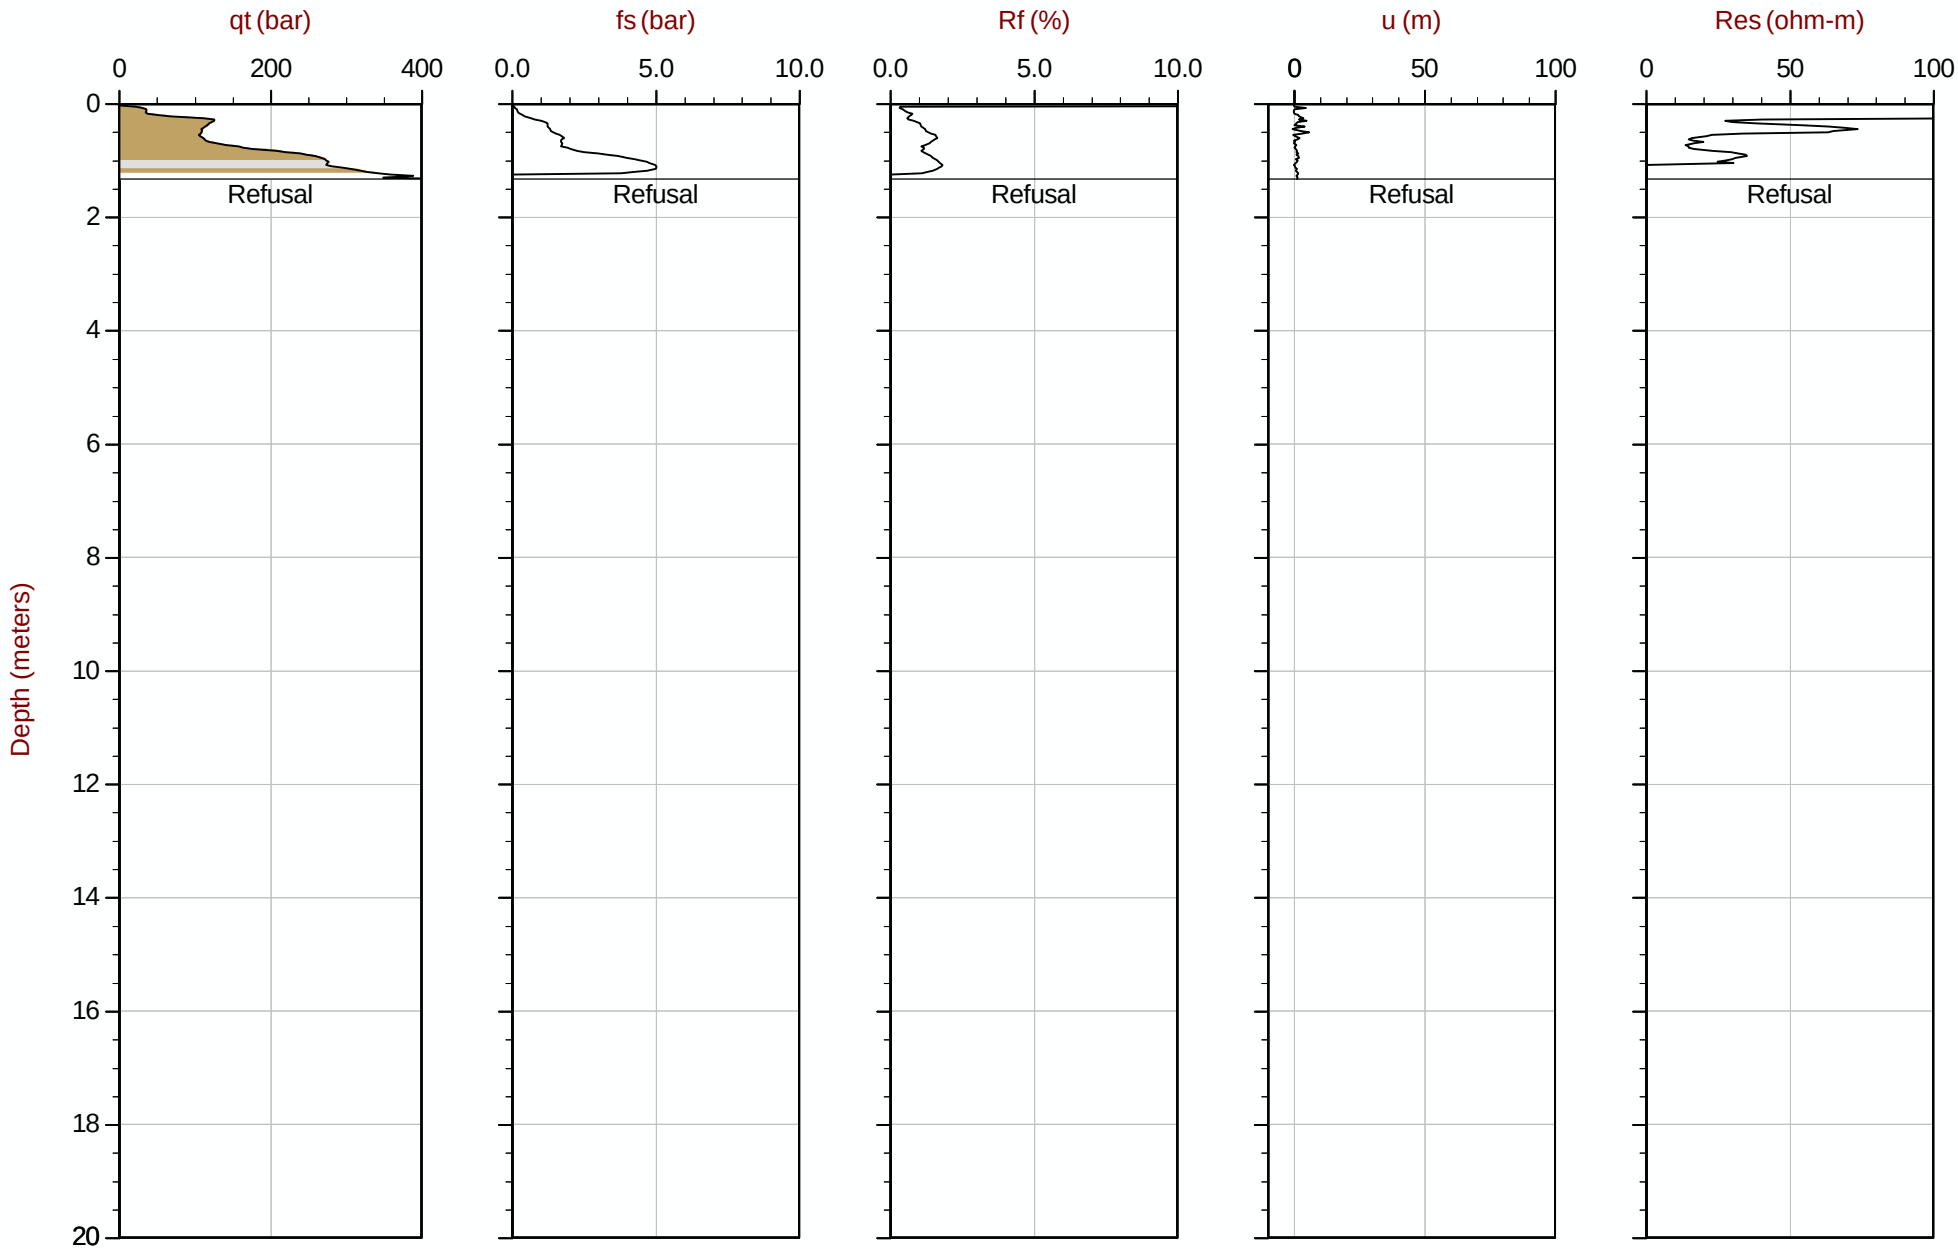

Max Depth: 1.325 m / 4.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT161A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612582m E: 415708m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 14:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161B
Cone: 750:T1500F15U35 Area= 15cm2

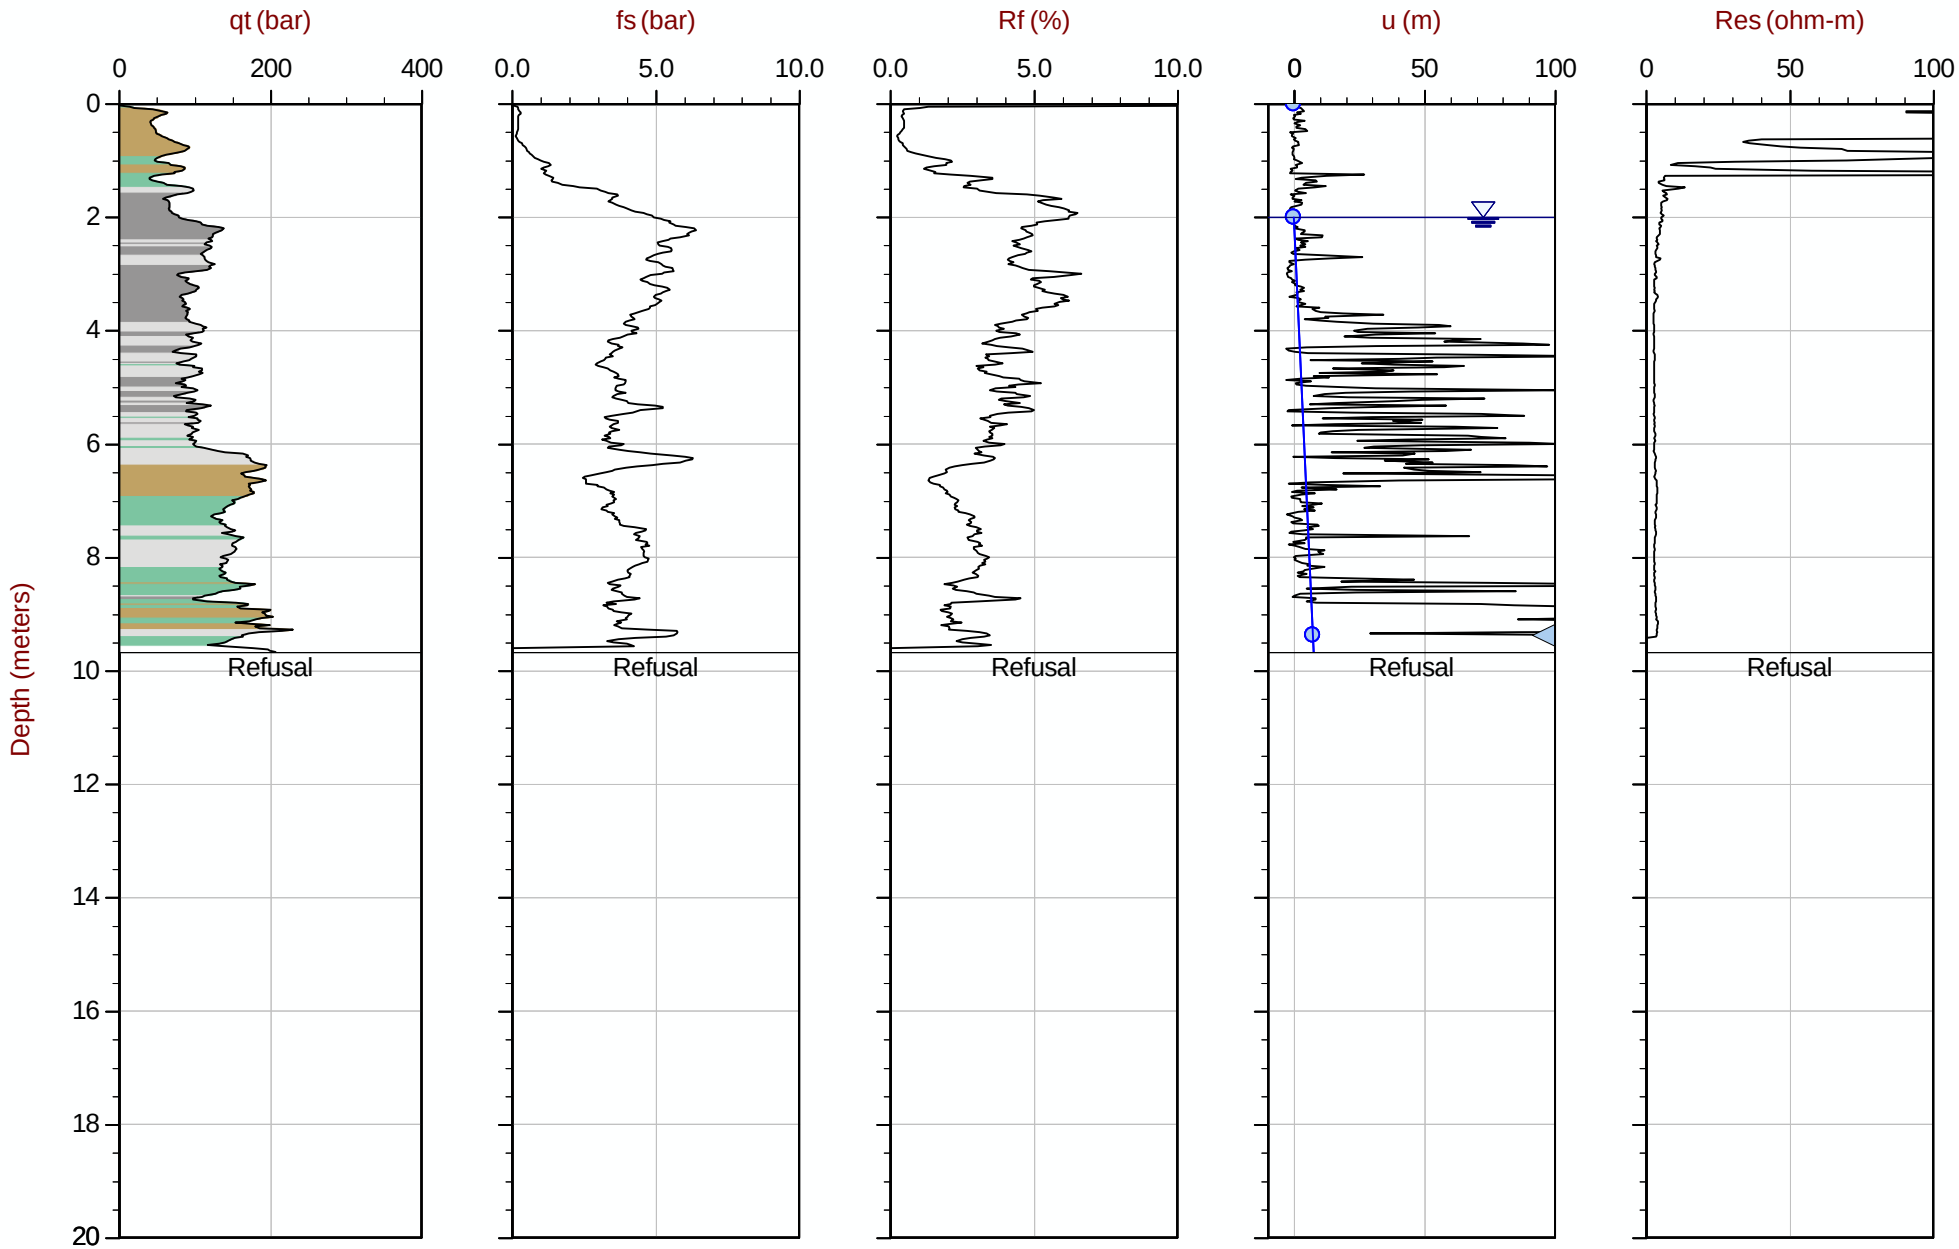

Max Depth: 9.675 m / 31.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT161B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612582m E: 415708m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 10:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT162
Cone: 750:T1500F15U35 Area= 15cm2

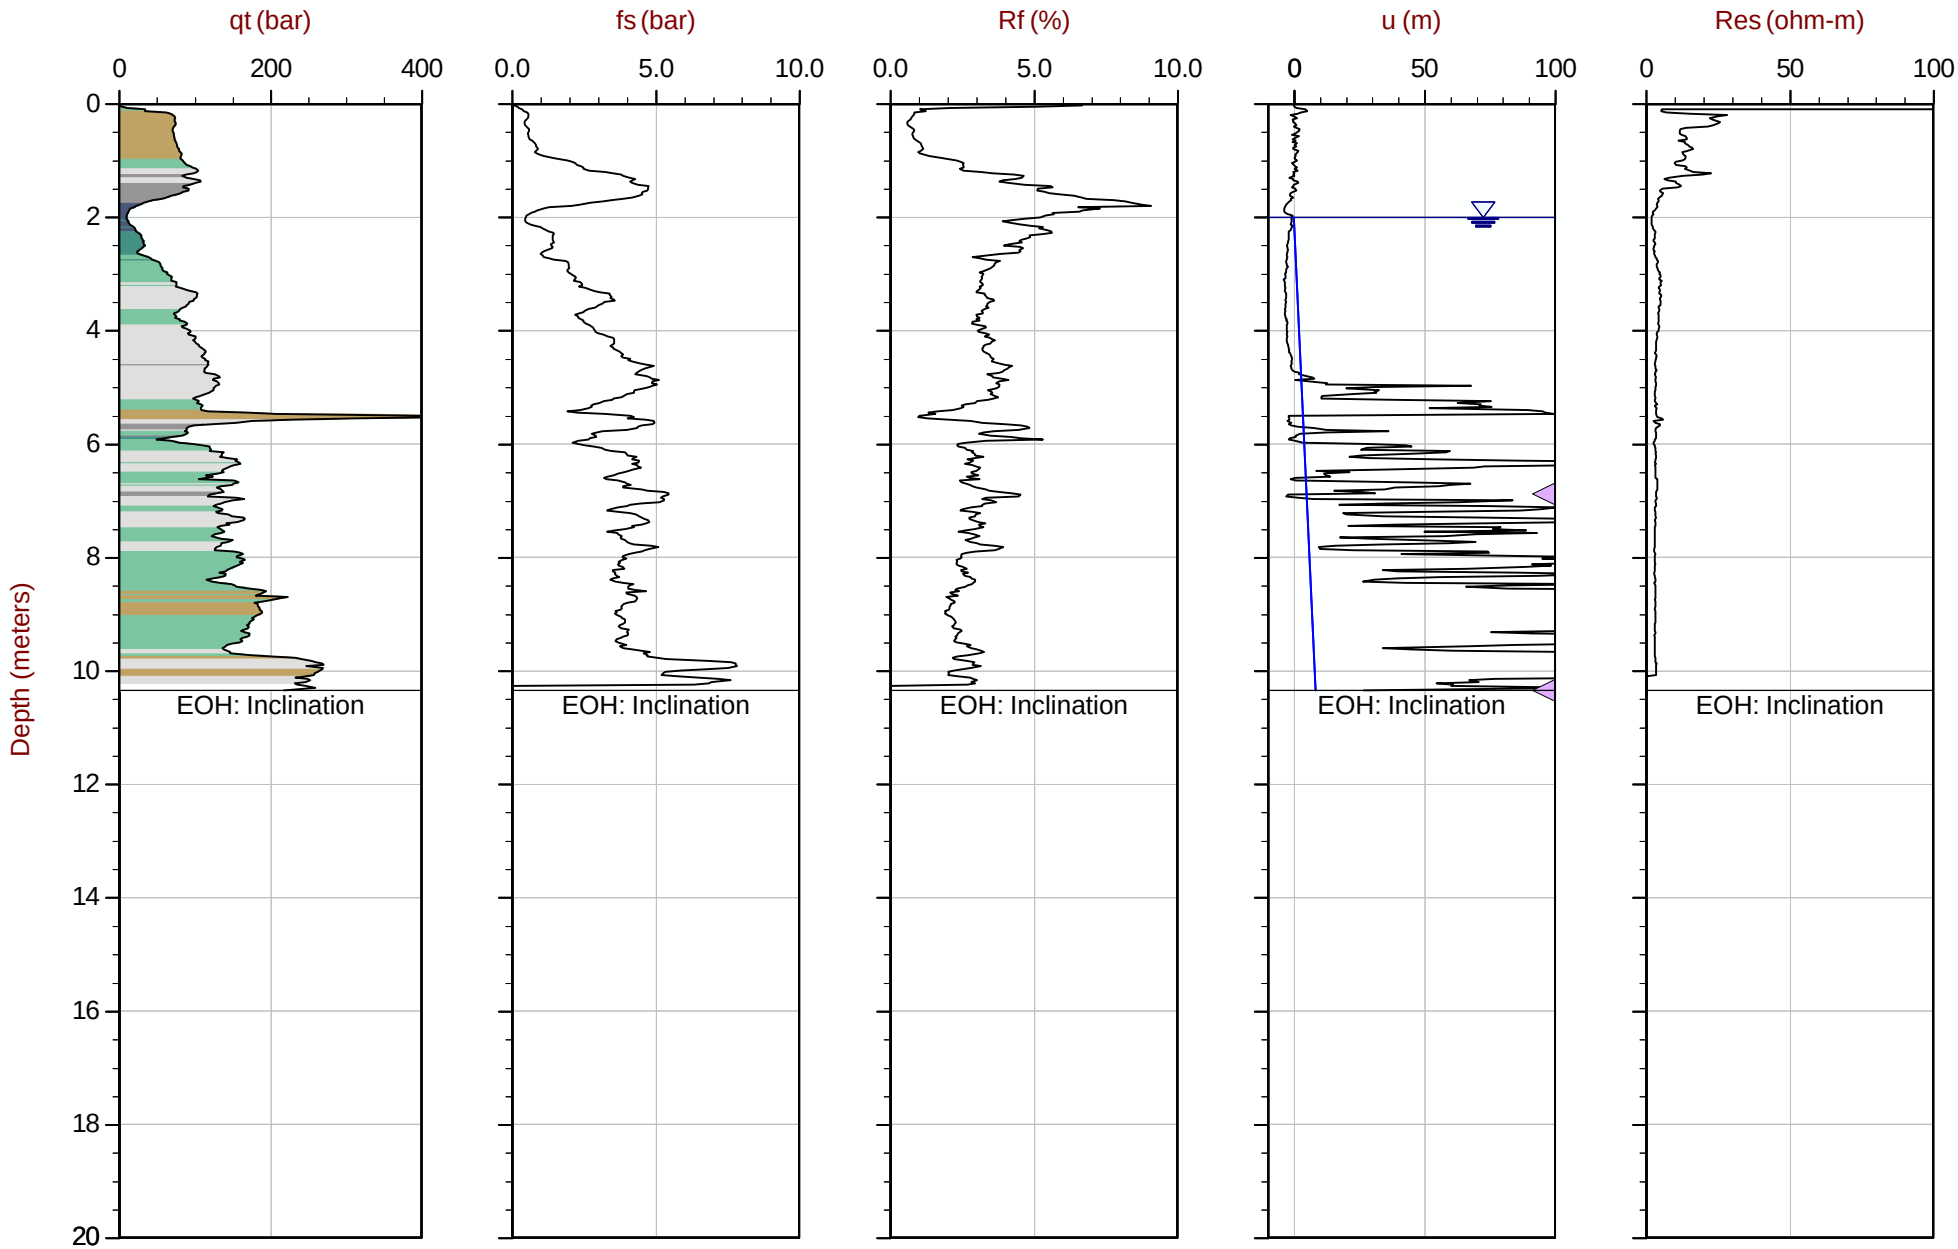

Max Depth: 10.350 m / 33.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT162.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612580m E: 415808m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 06:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT163
Cone: 821:T1000F10U35 Area= 15cm2

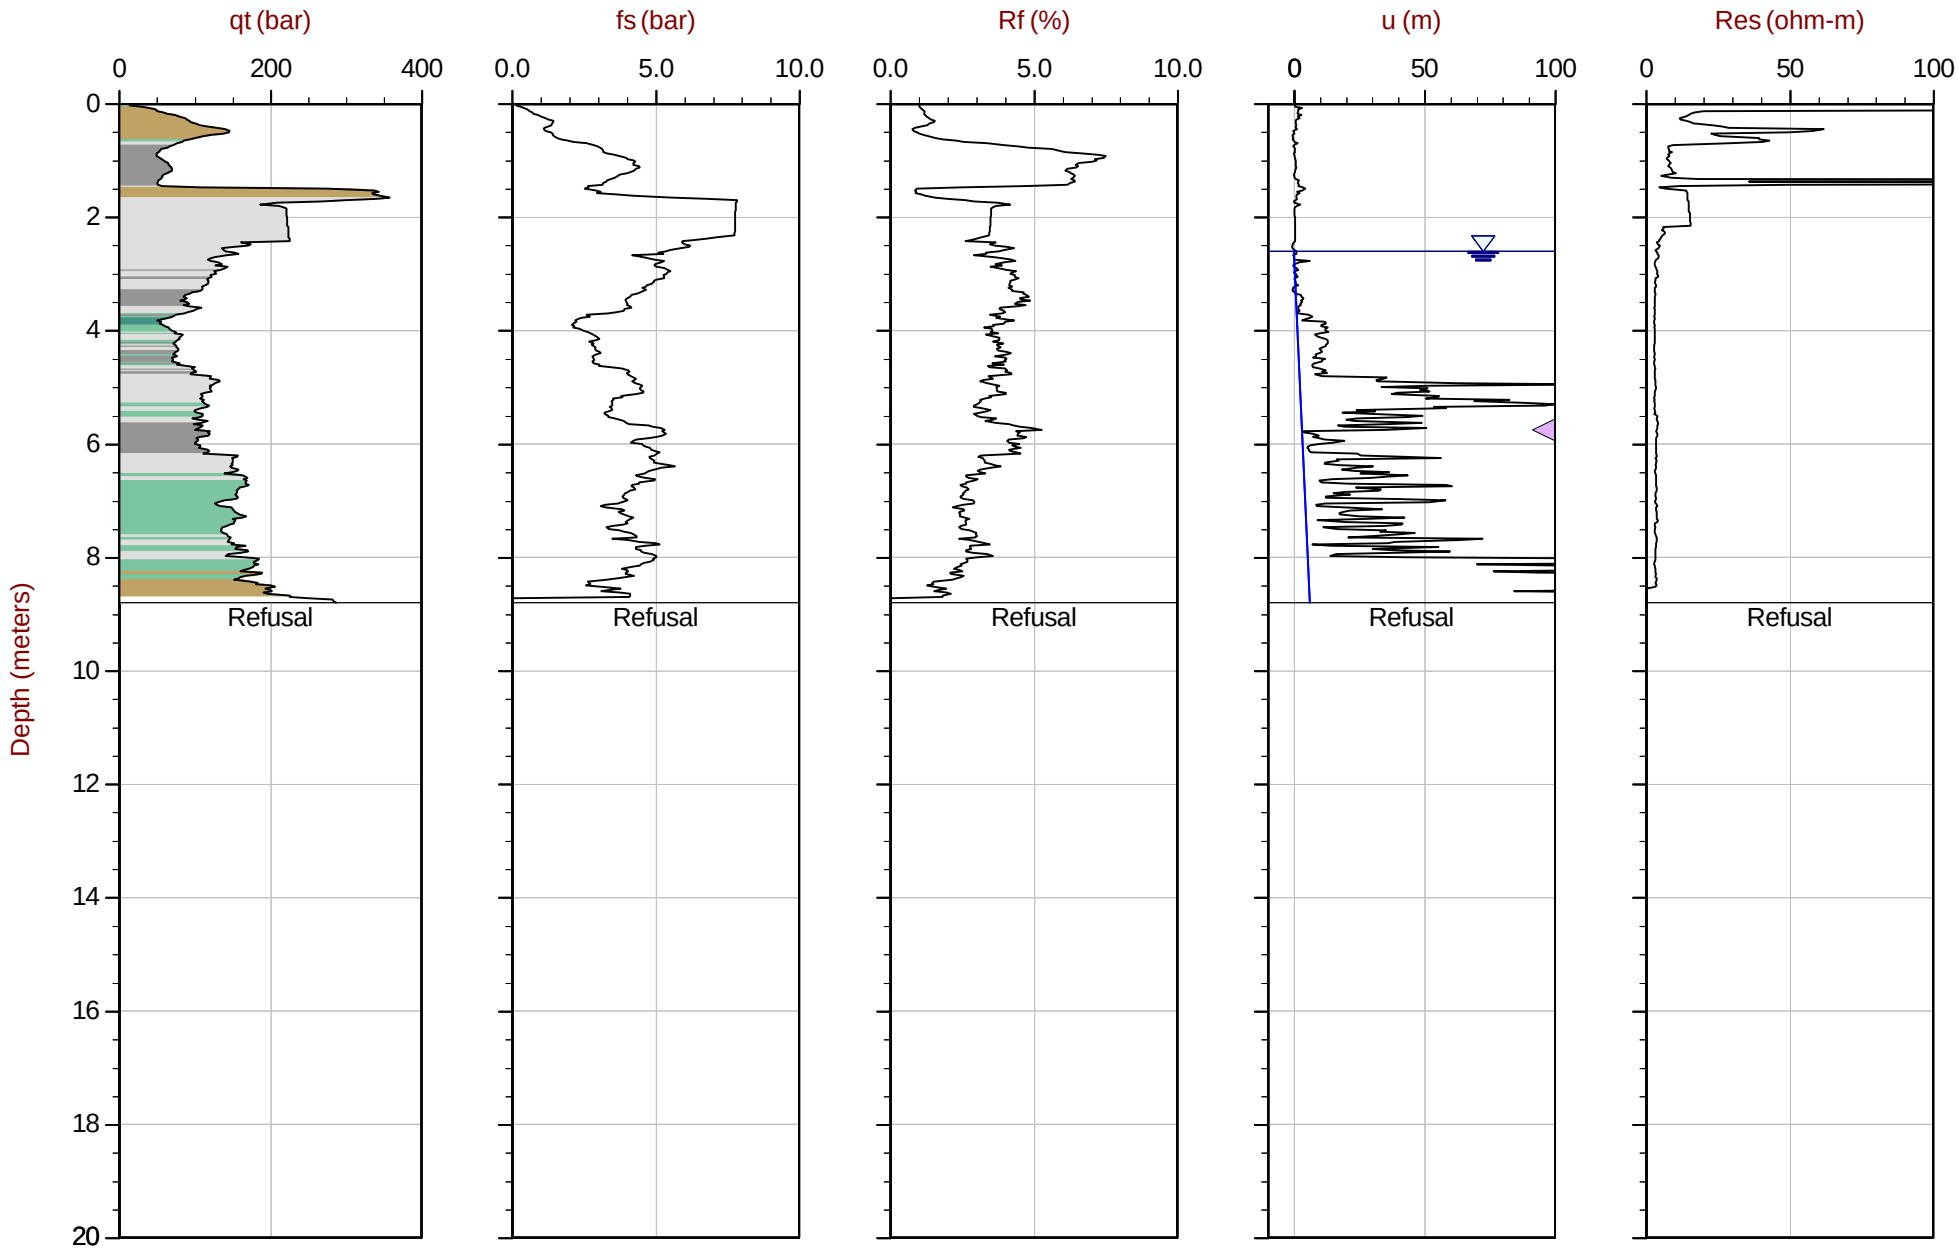

Max Depth: 8.800 m / 28.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT163.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612581m E: 415908m Elev: 769.201m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 15:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT164
Cone: 750:T1500F15U35 Area= 15cm2

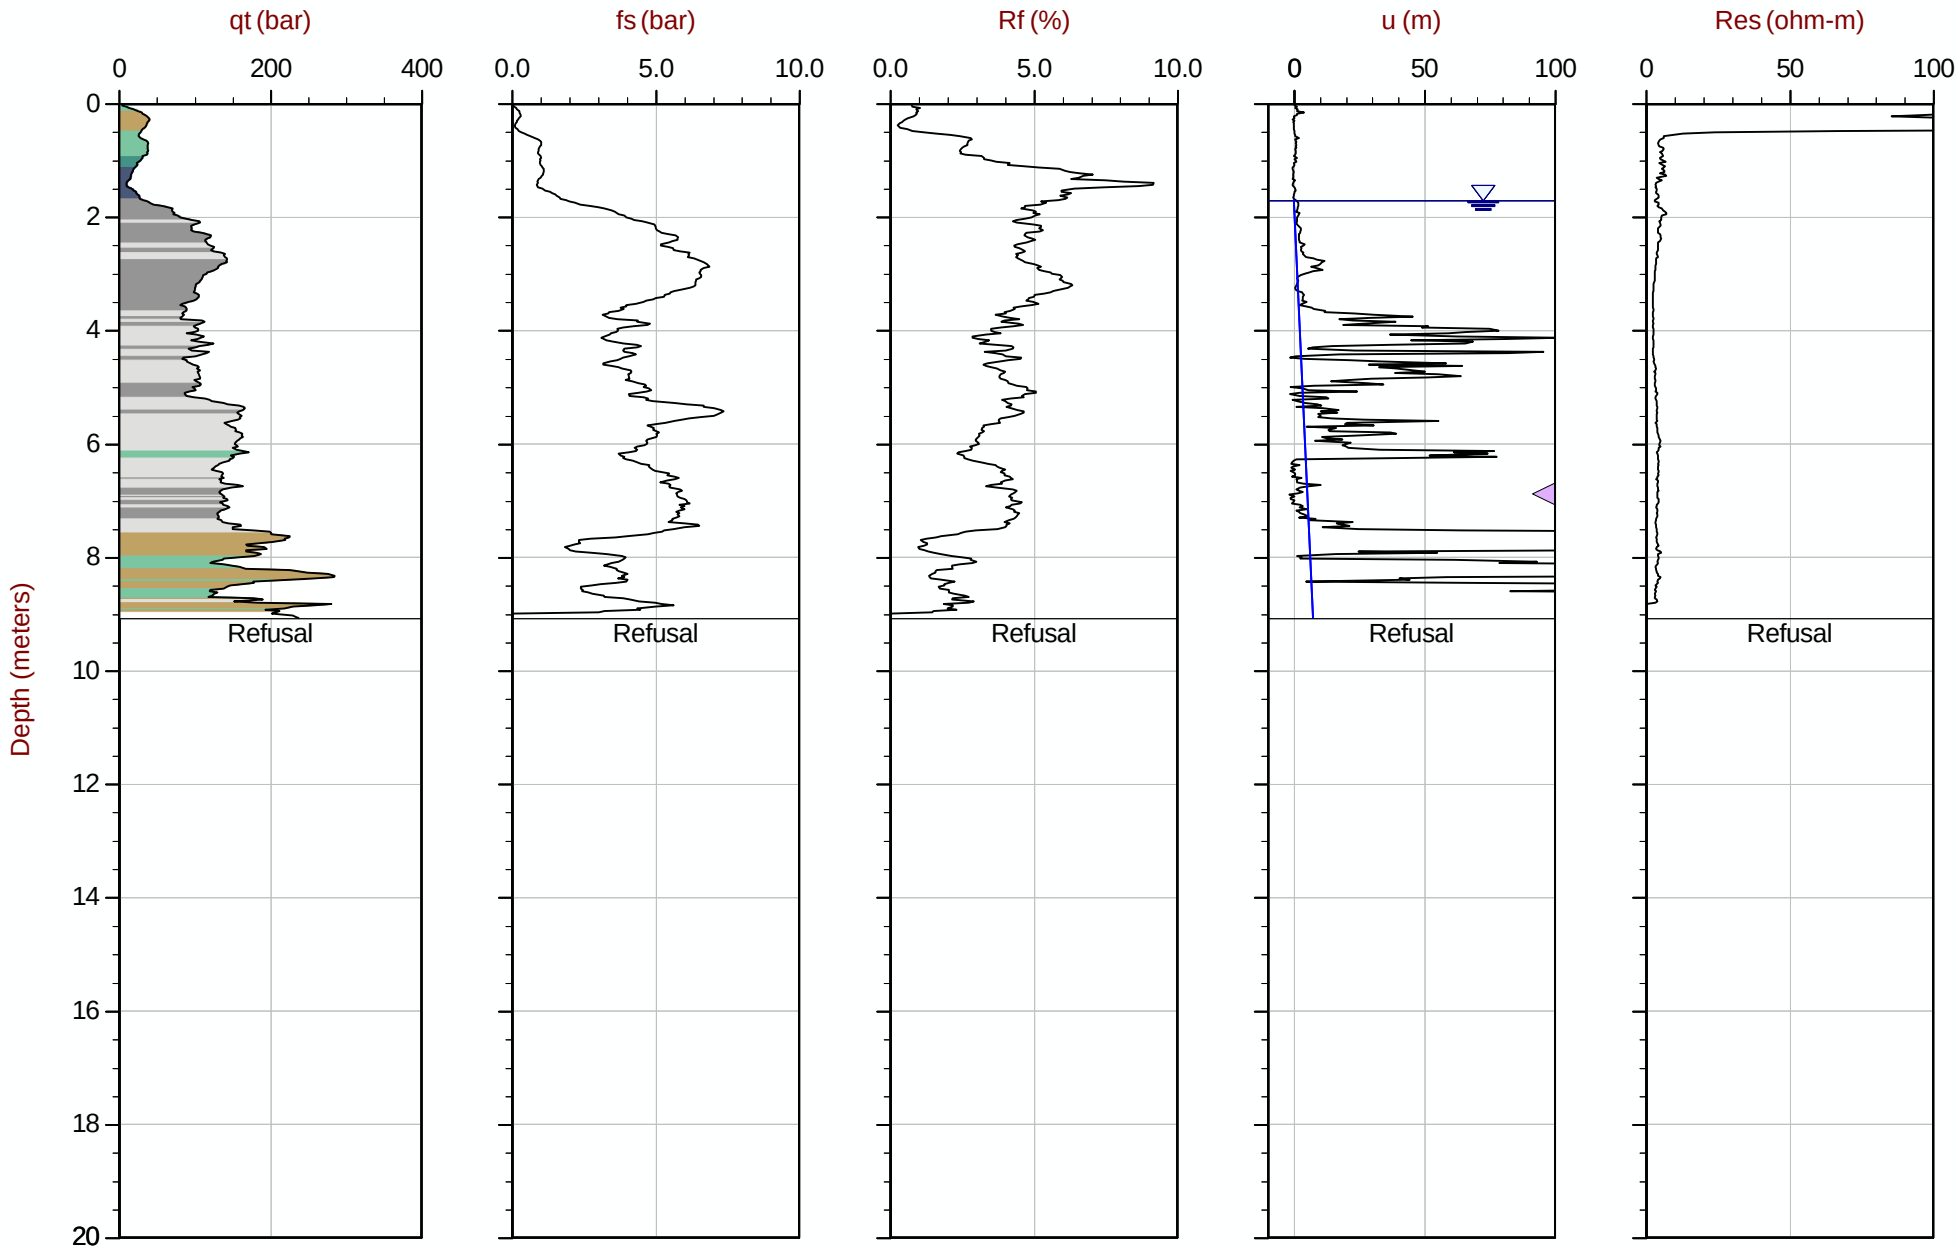

Max Depth: 9.075 m / 29.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT164.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612579m E: 416008m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 15:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT165
Cone: 821:T1000F10U35 Area= 15cm2

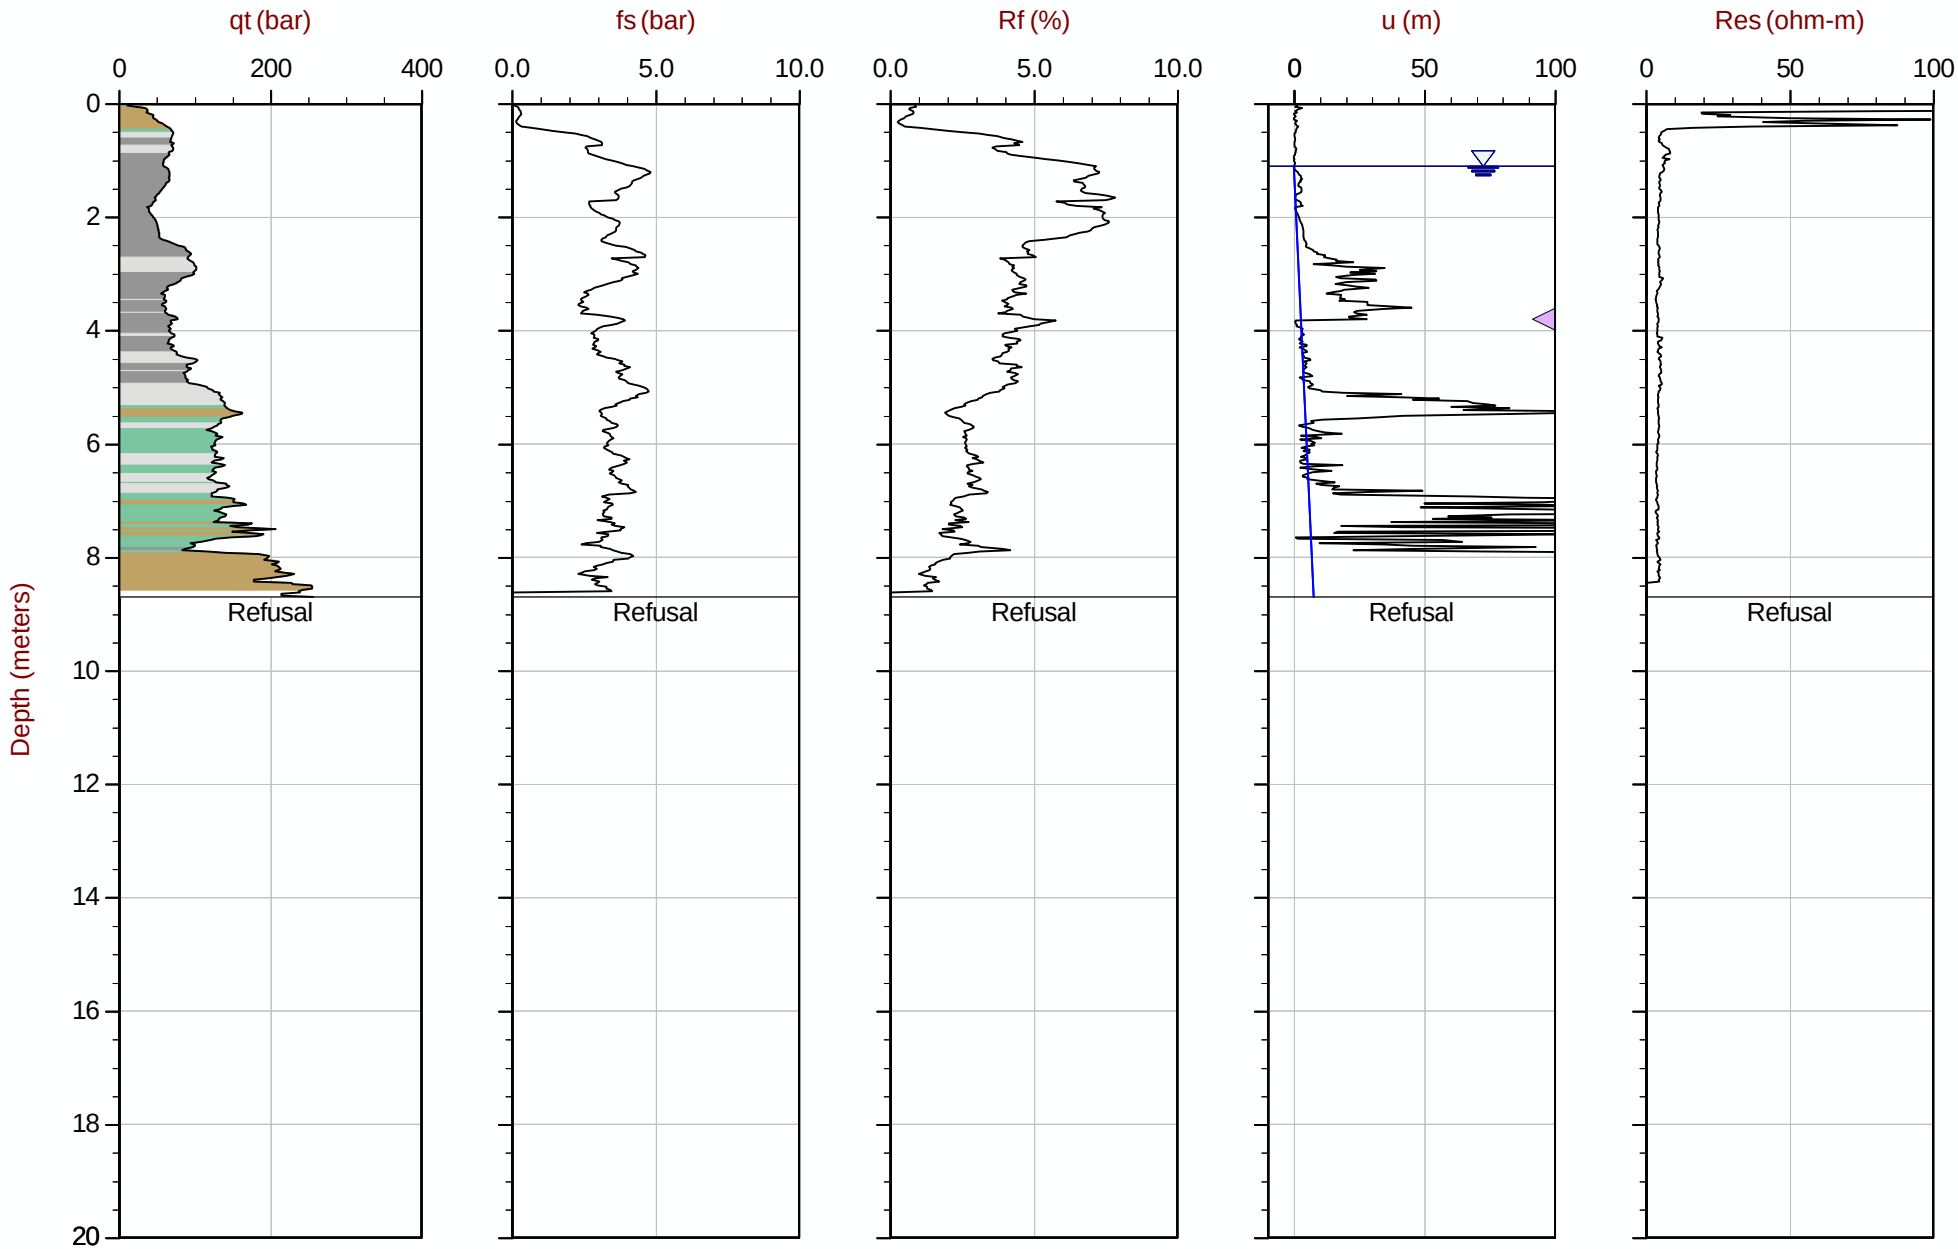

Max Depth: 8.700 m / 28.54 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT165.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612573m E: 416108m Elev: 769.874m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 13:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT167
Cone: 854:T1500F15U35 Area= 15cm2

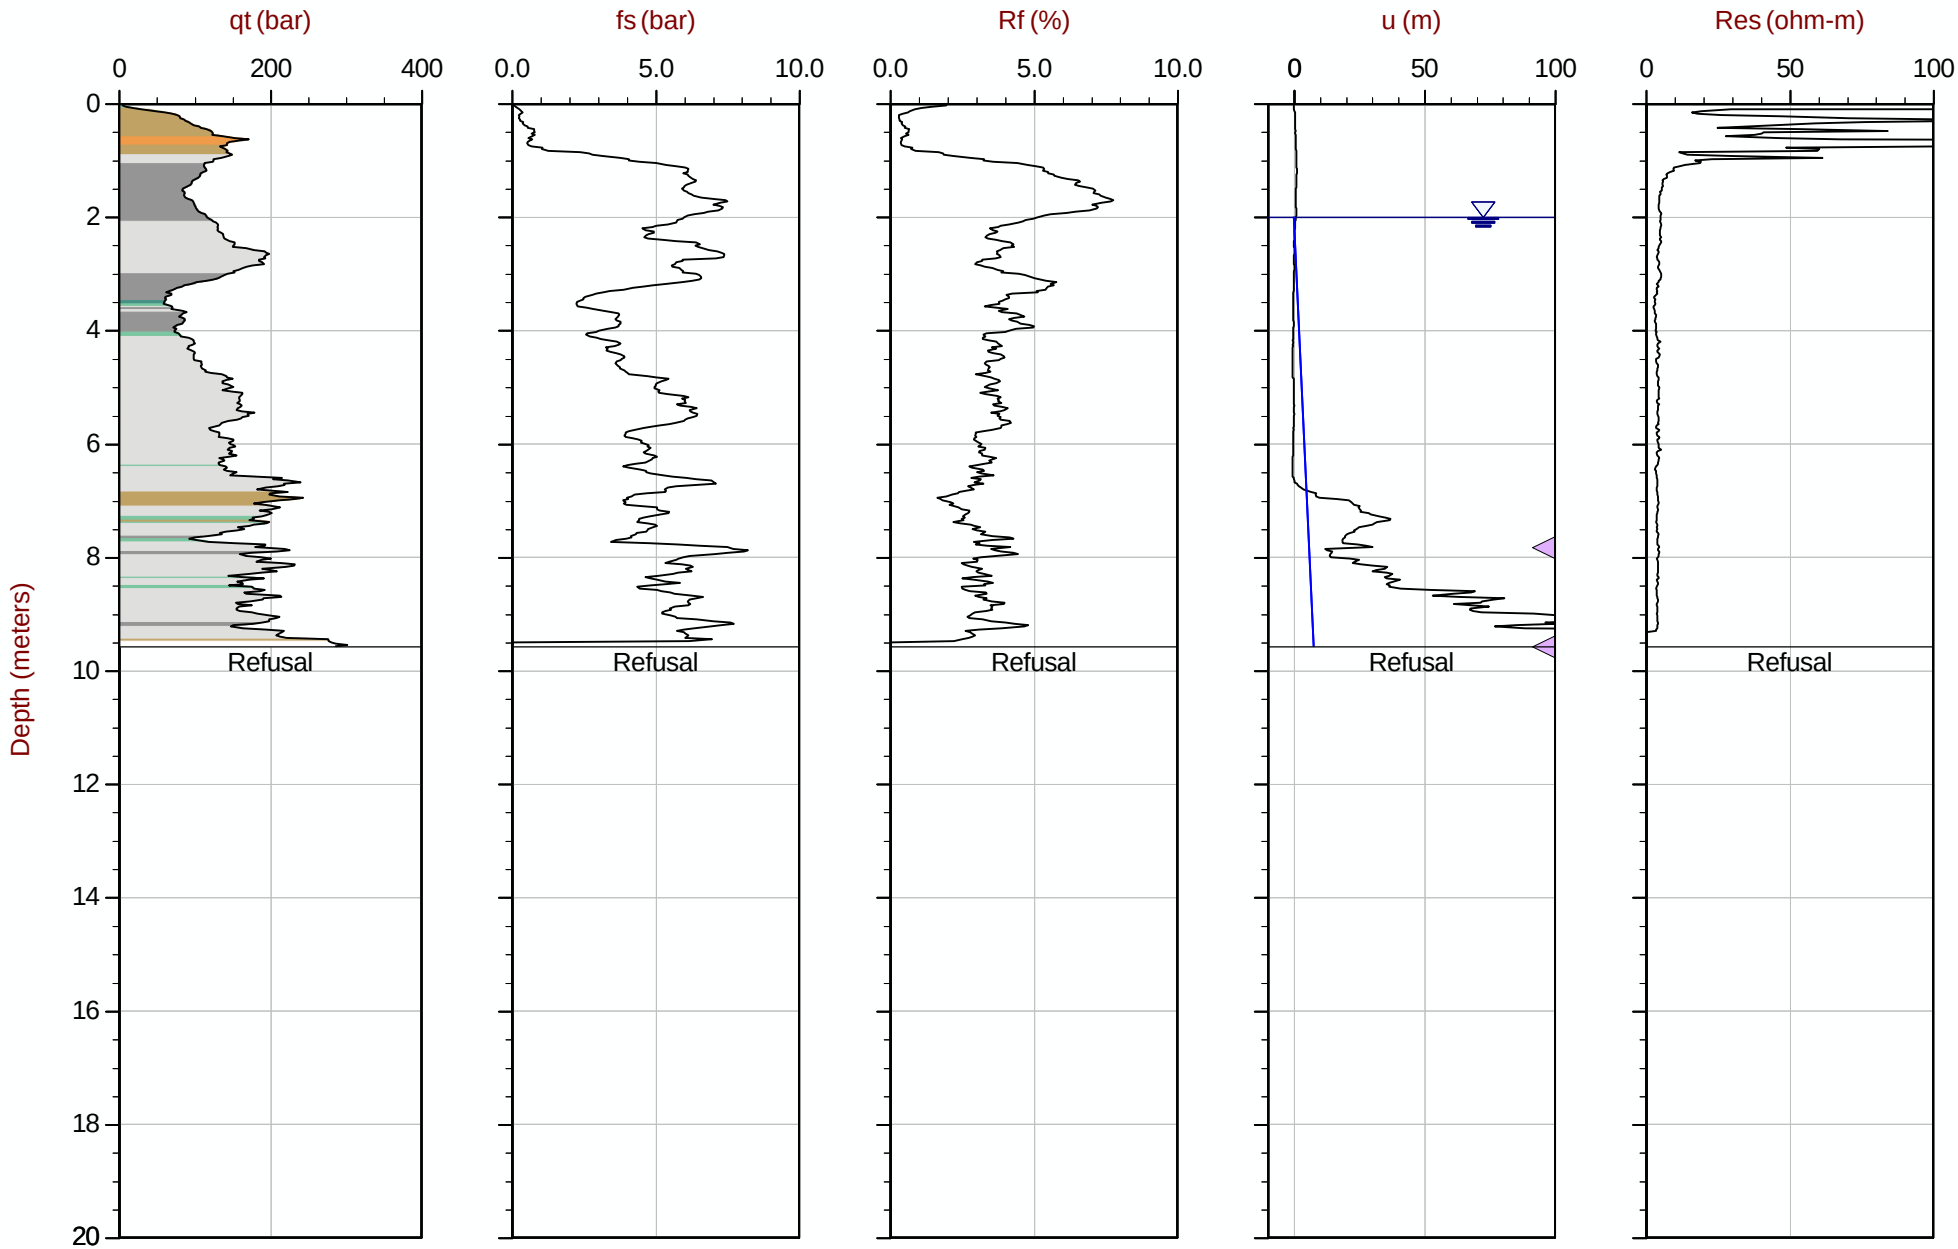

Max Depth: 9.575 m / 31.41 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT167.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612569m E: 416308m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 15:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT168
Cone: 854:T1500F15U35 Area= 15cm2

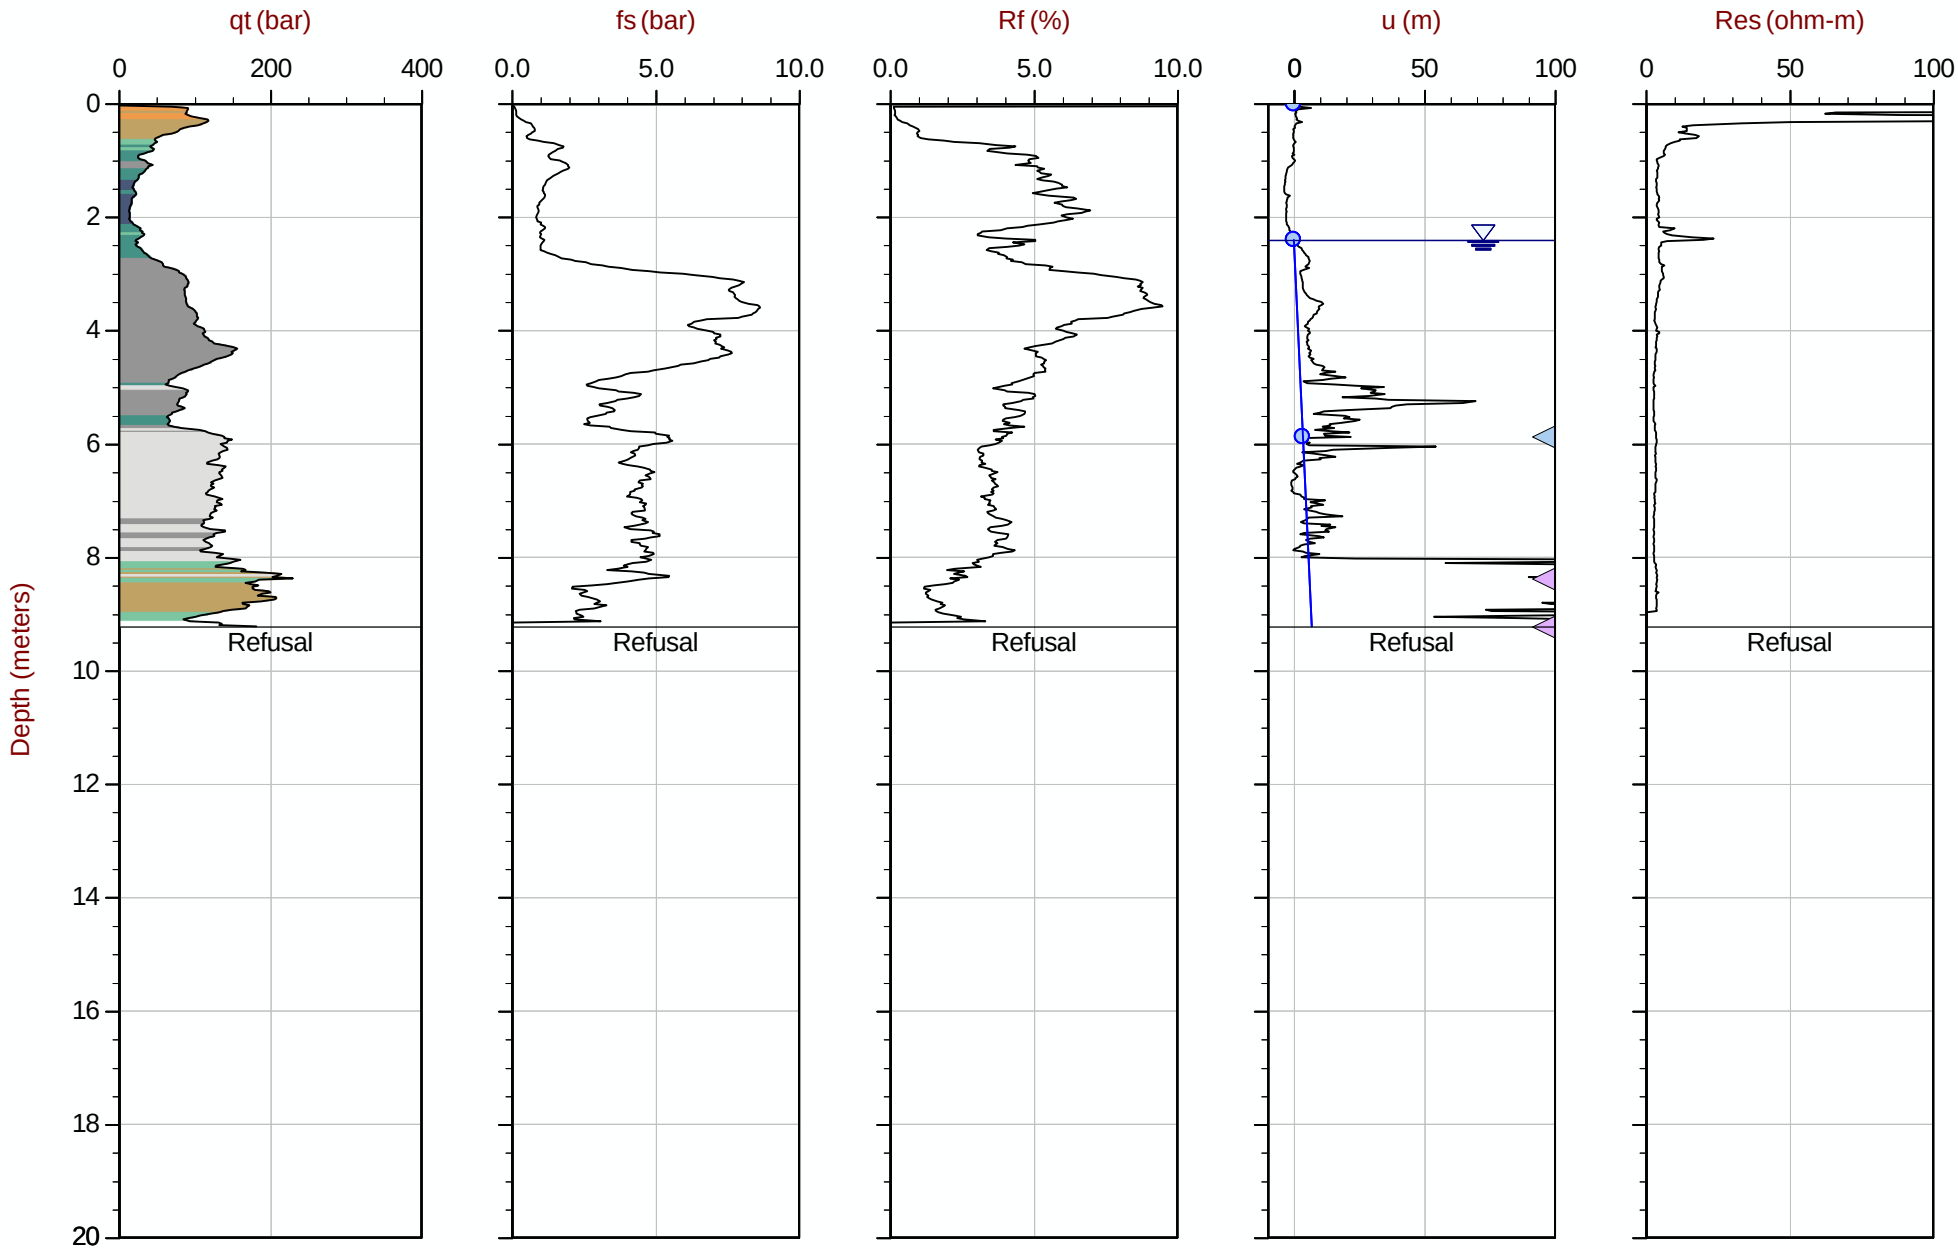

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT168.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612566m E: 416408m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 08:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT169
Cone: 854:T1500F15U35 Area= 15cm2

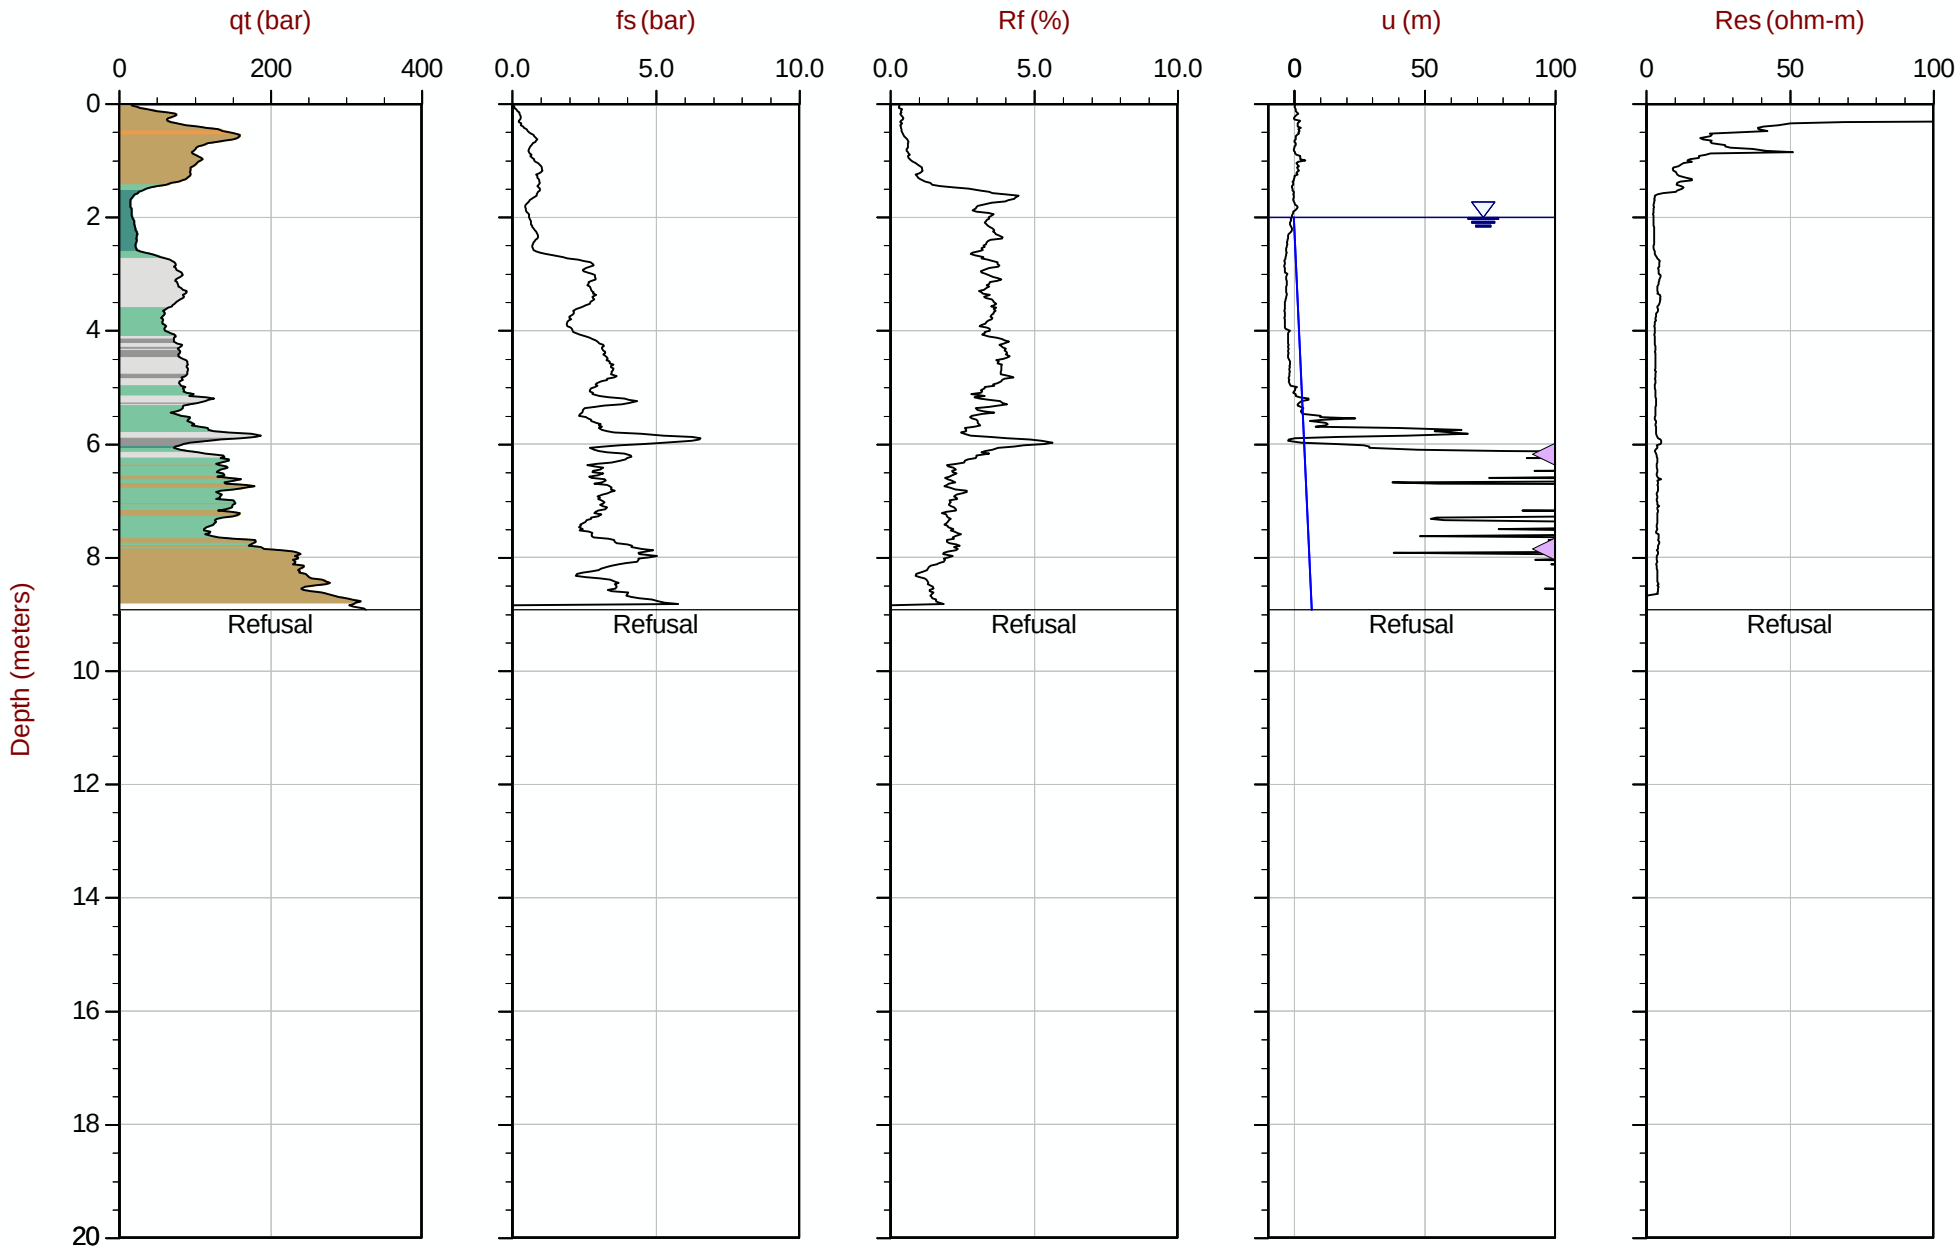

Max Depth: 8.925 m / 29.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT169.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612568m E: 416508m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 11:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT170
Cone: 854:T1500F15U35 Area= 15cm2

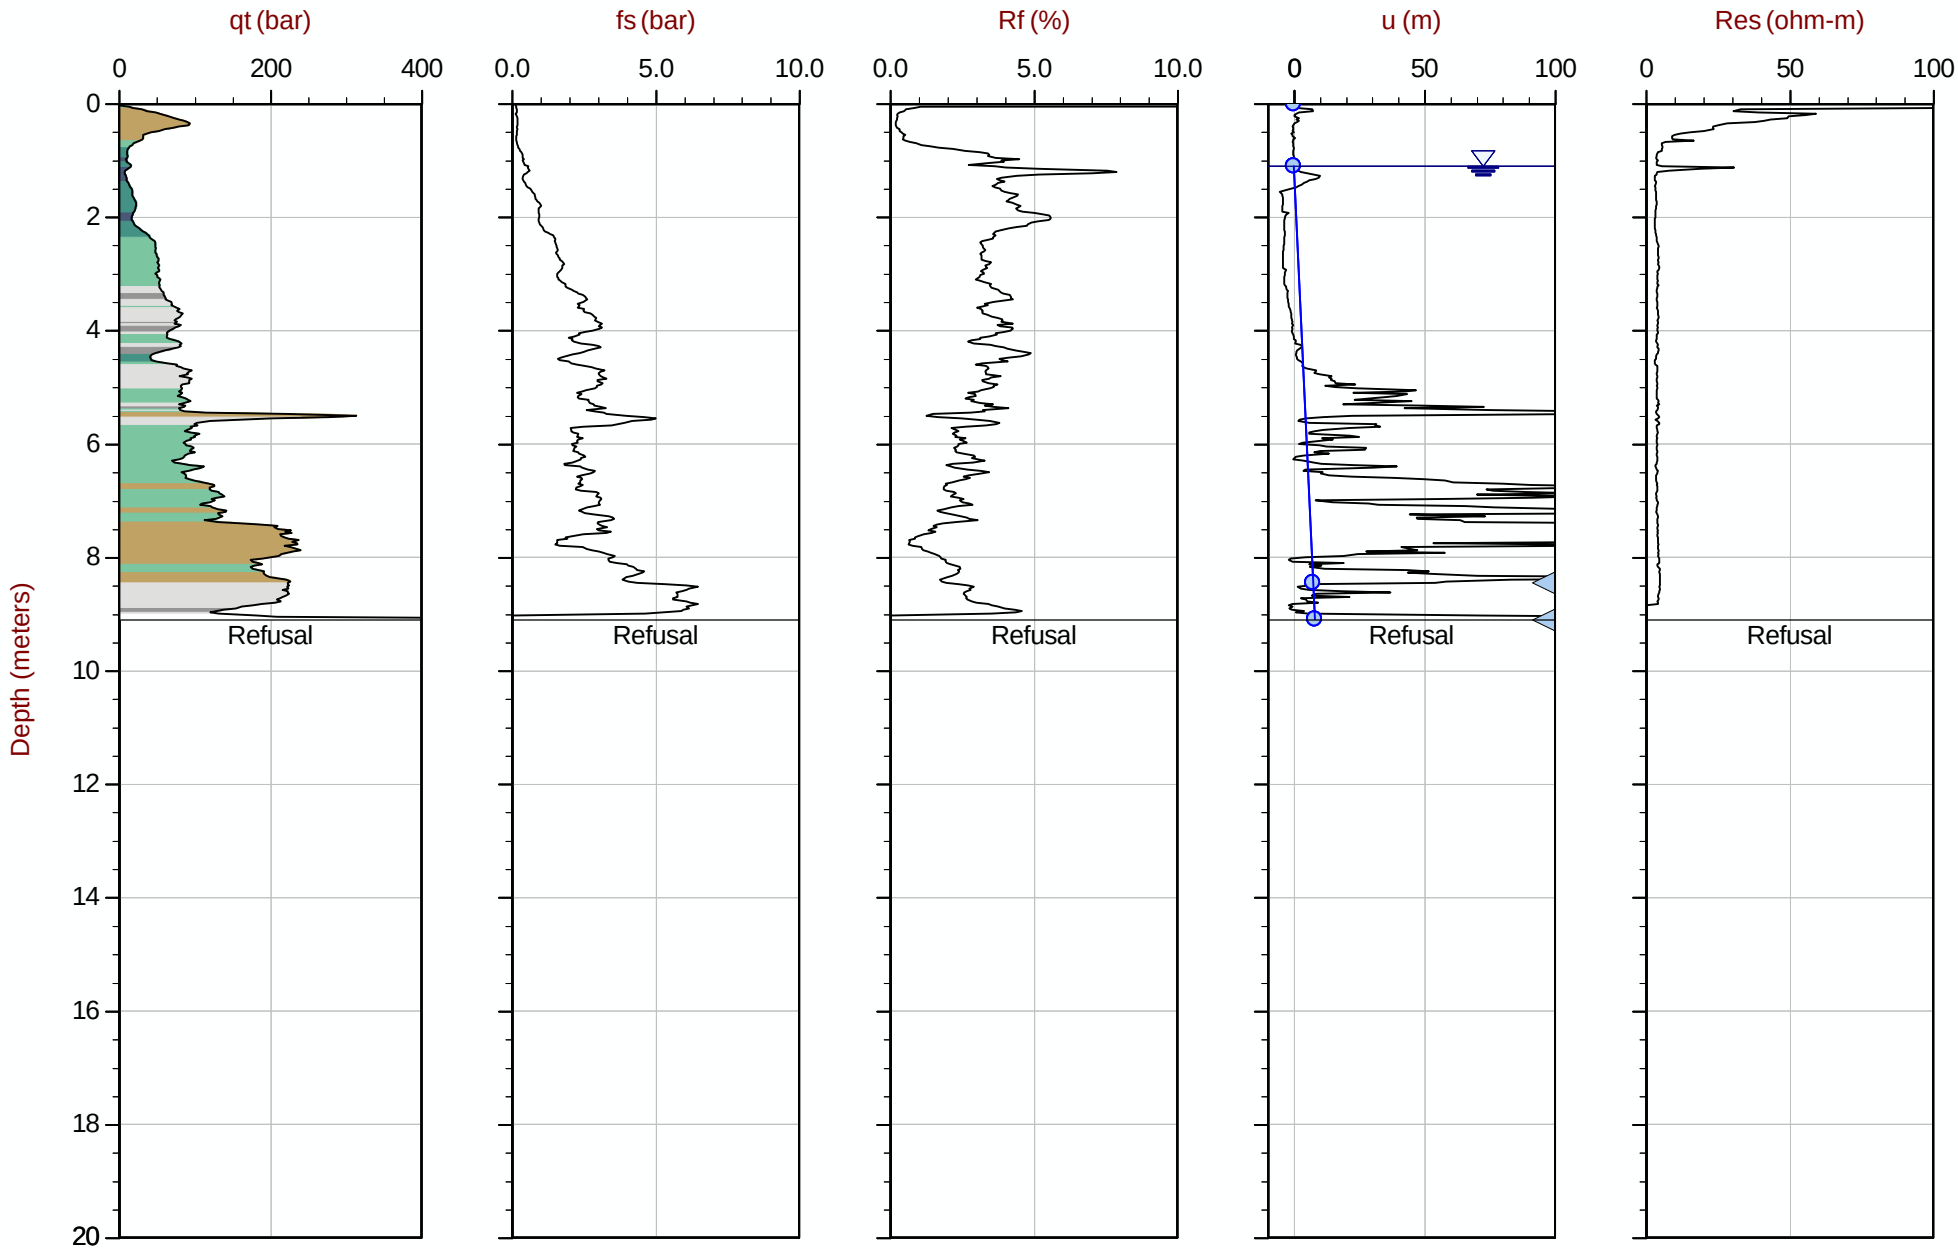

Max Depth: 9.100 m / 29.86 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT170.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612569m E: 416610m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 15:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT200
Cone: 854:T1500F15U35 Area= 15cm2

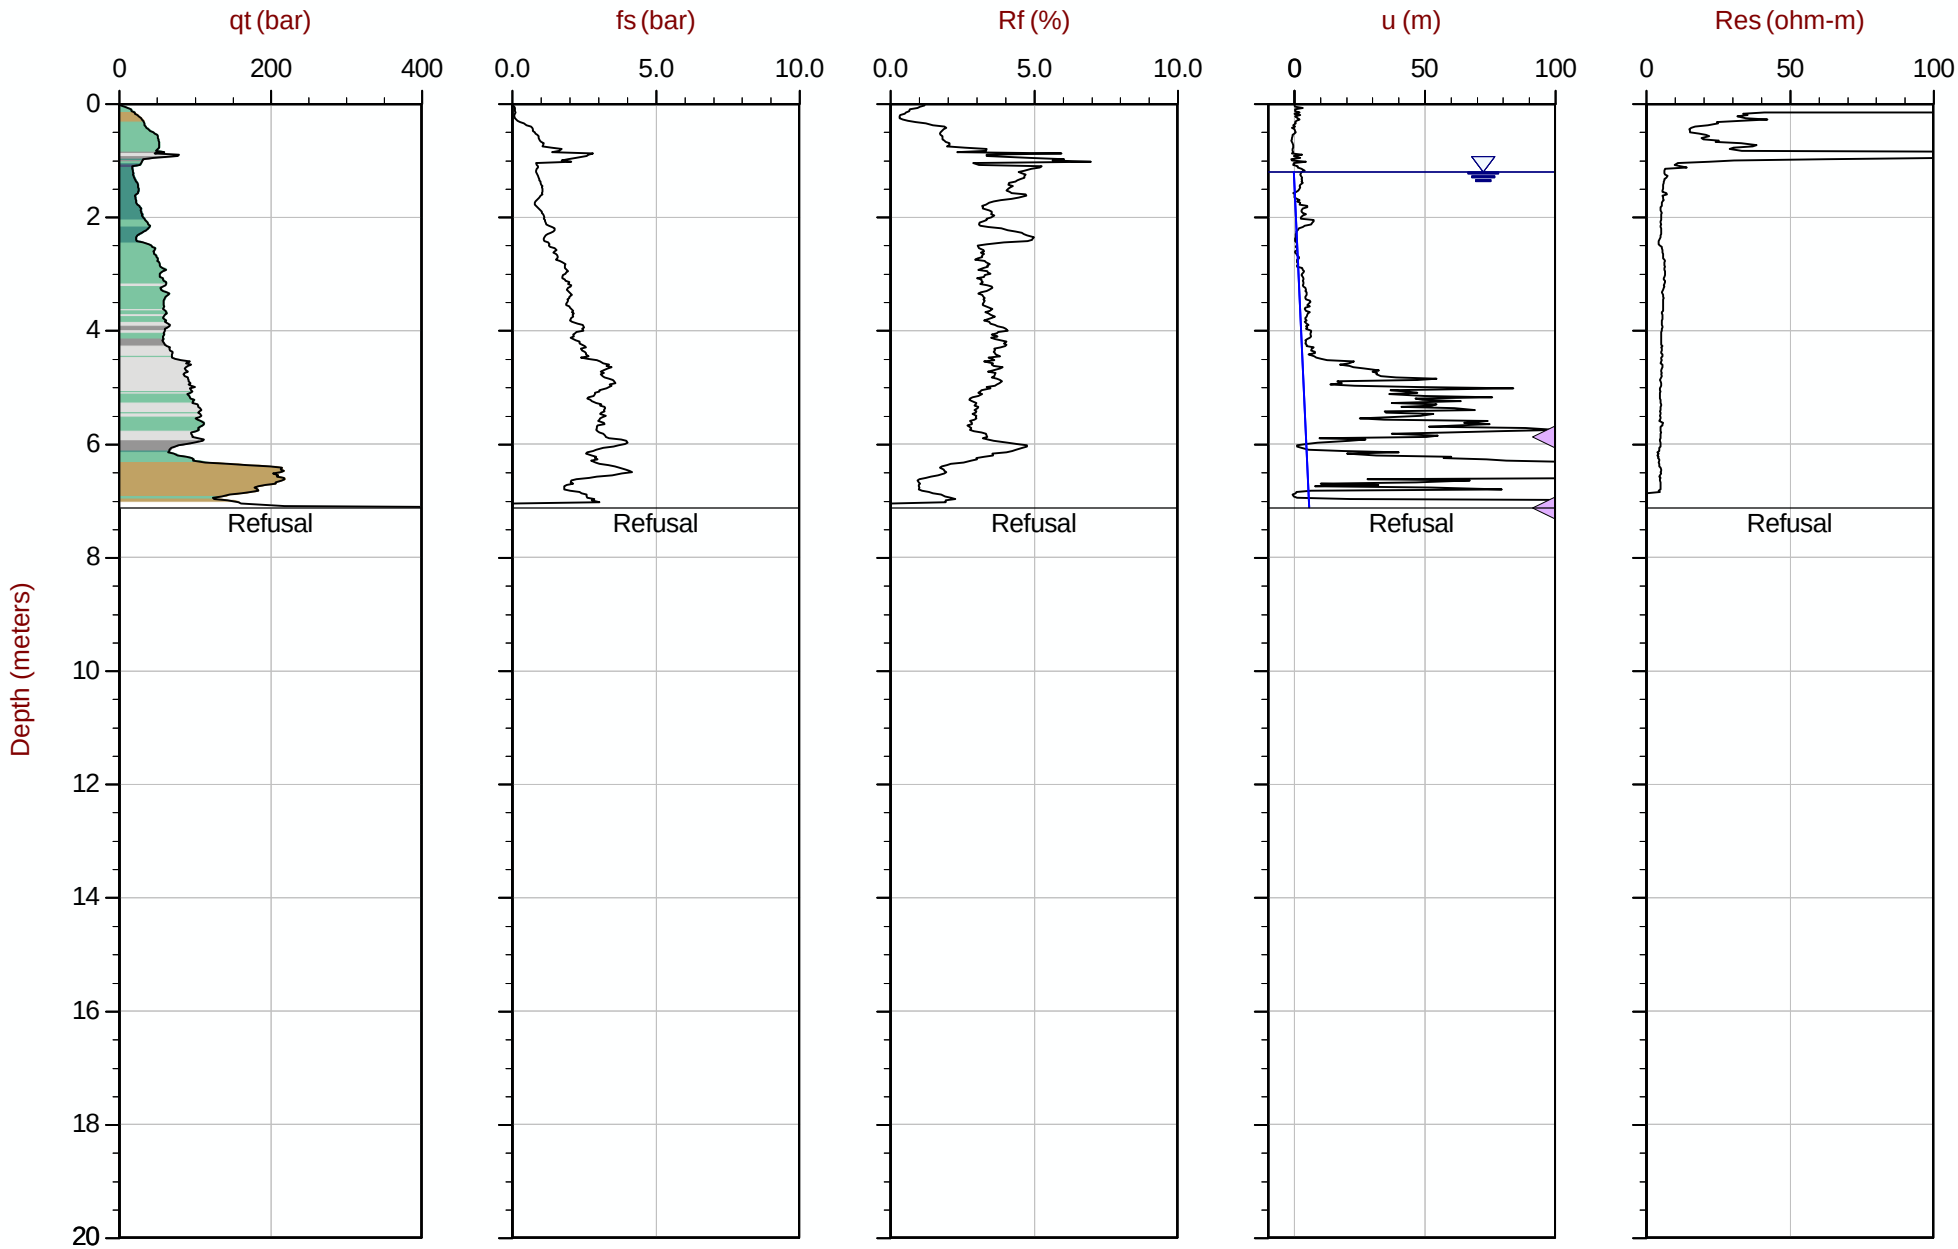

Max Depth: 7.125 m / 23.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT200.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612486m E: 416722m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 16:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT201
Cone: 854:T1500F15U35 Area= 15cm2

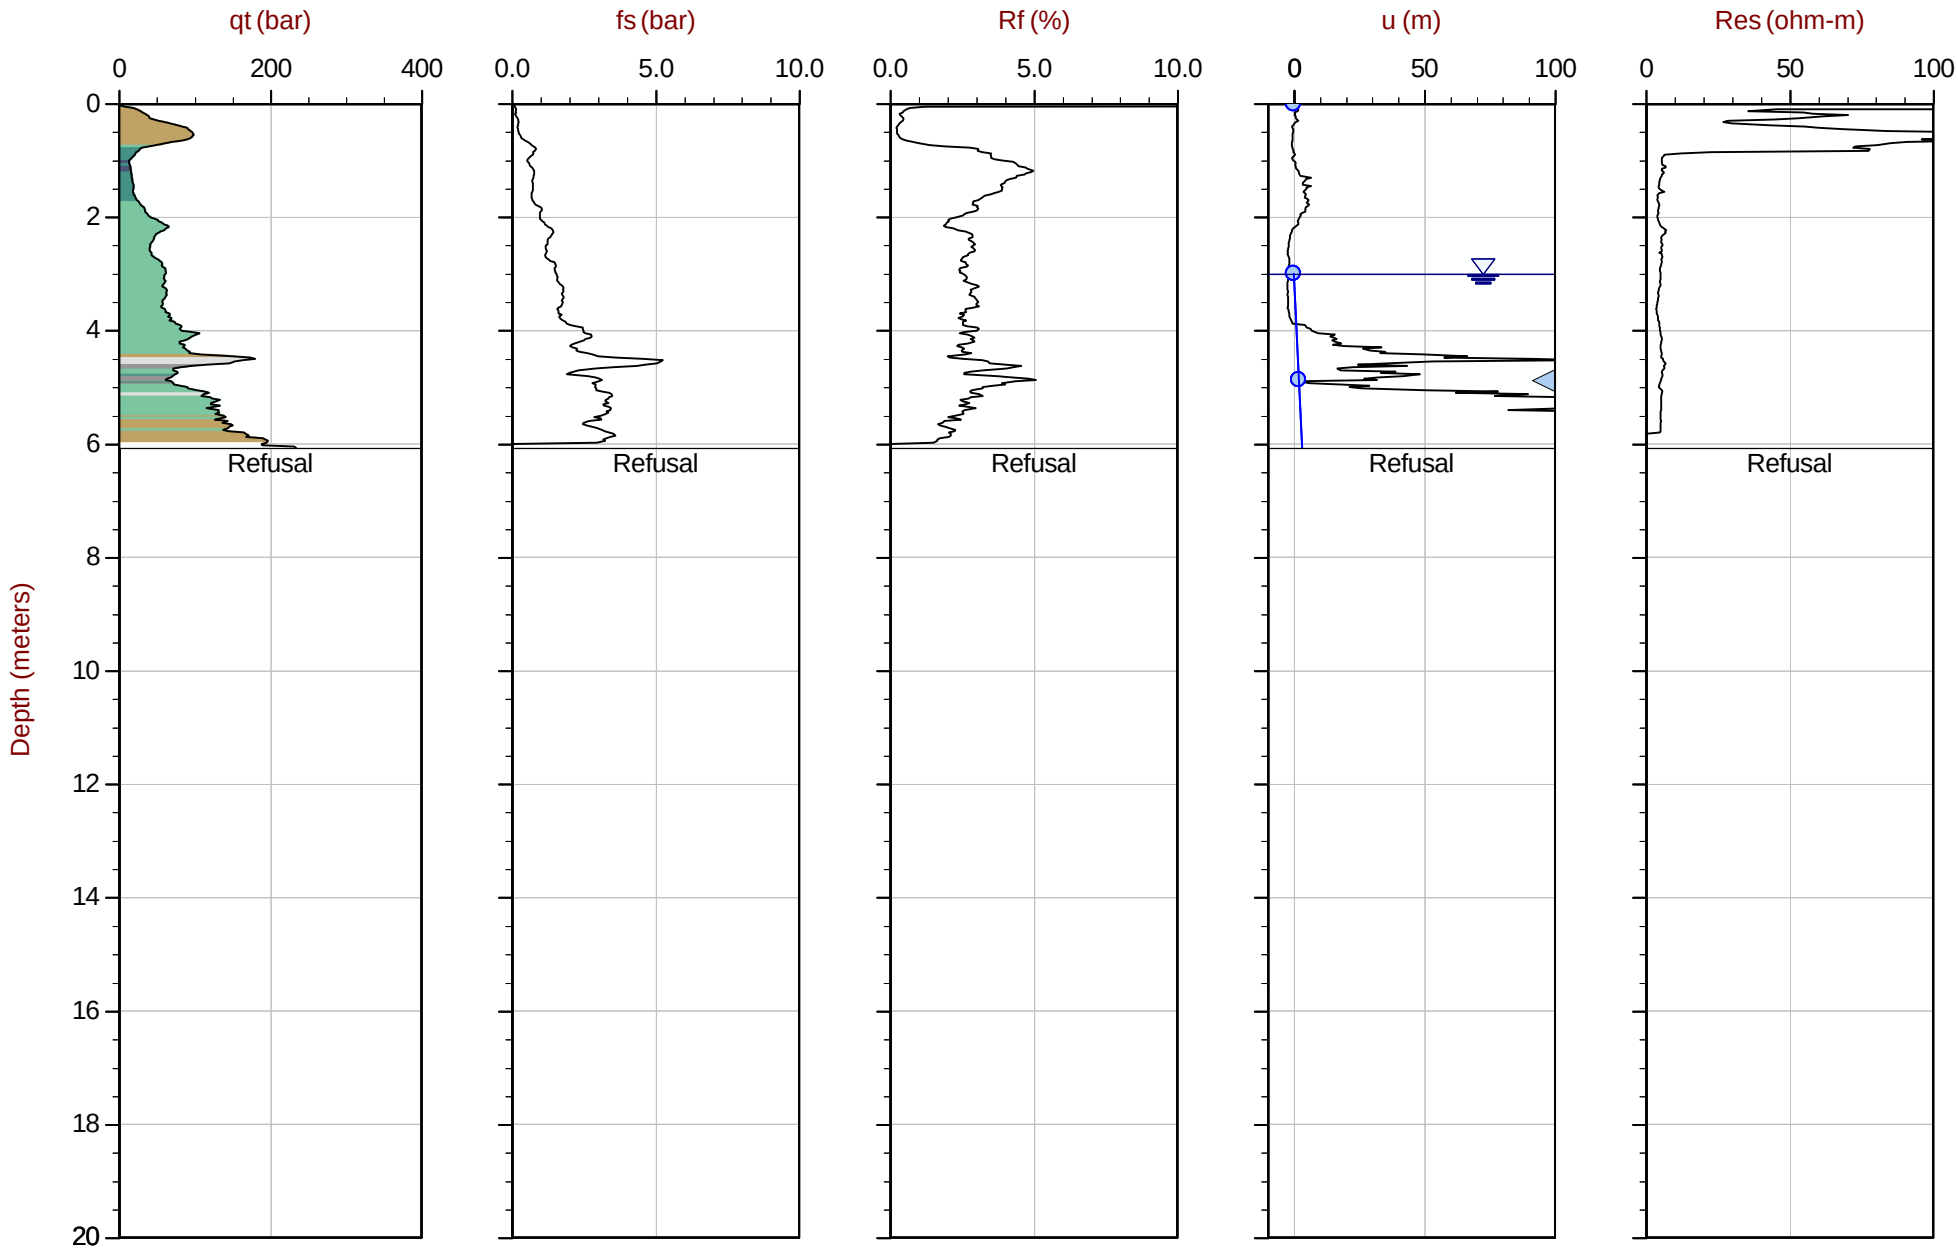

Max Depth: 6.075 m / 19.93 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT201.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612454m E: 416772m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 07:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT202
Cone: 854:T1500F15U35 Area= 15cm2

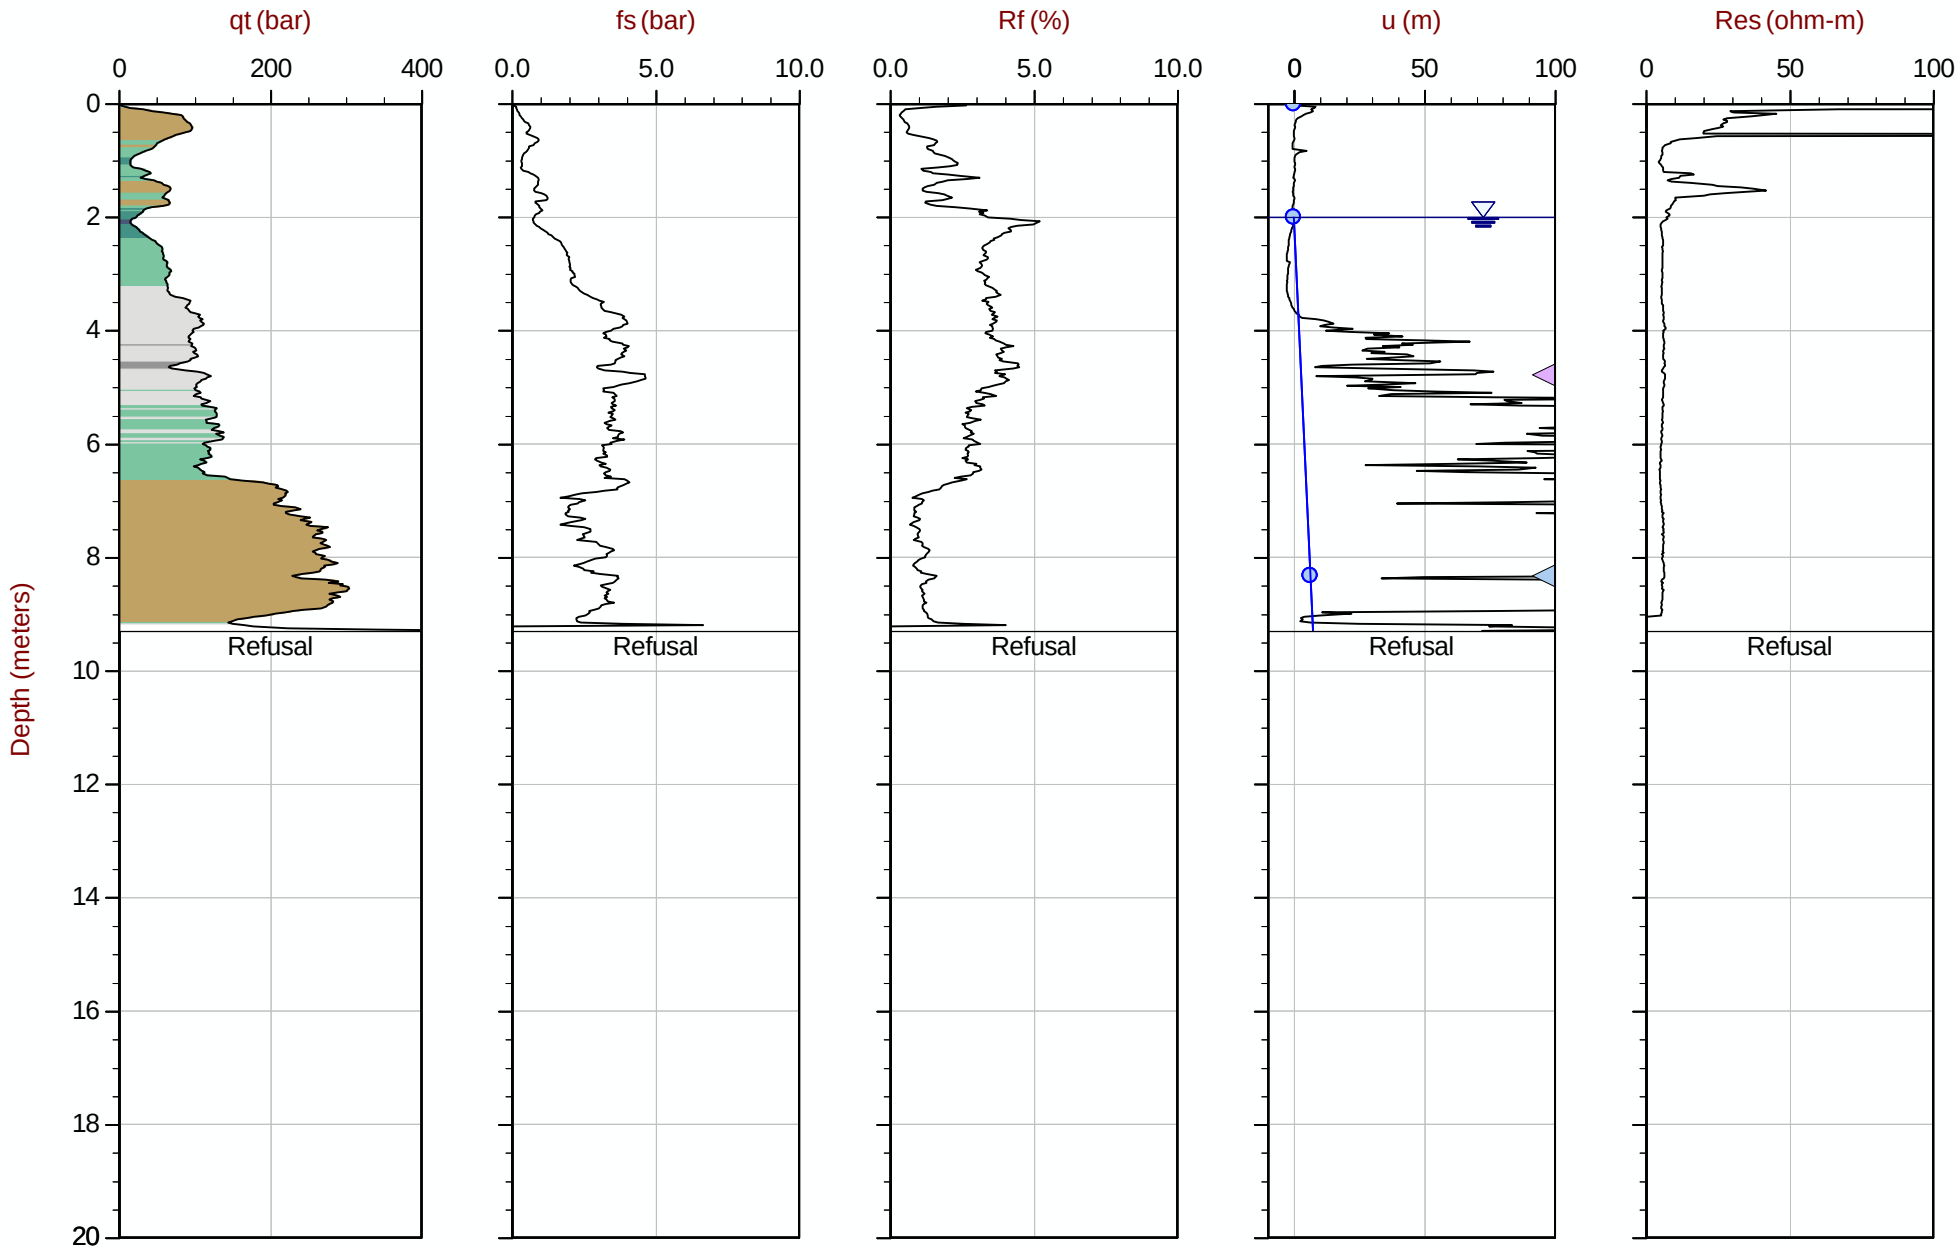

Max Depth: 9.300 m / 30.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT202.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612420m E: 416809m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 08:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT203
Cone: 854:T1500F15U35 Area= 15cm2

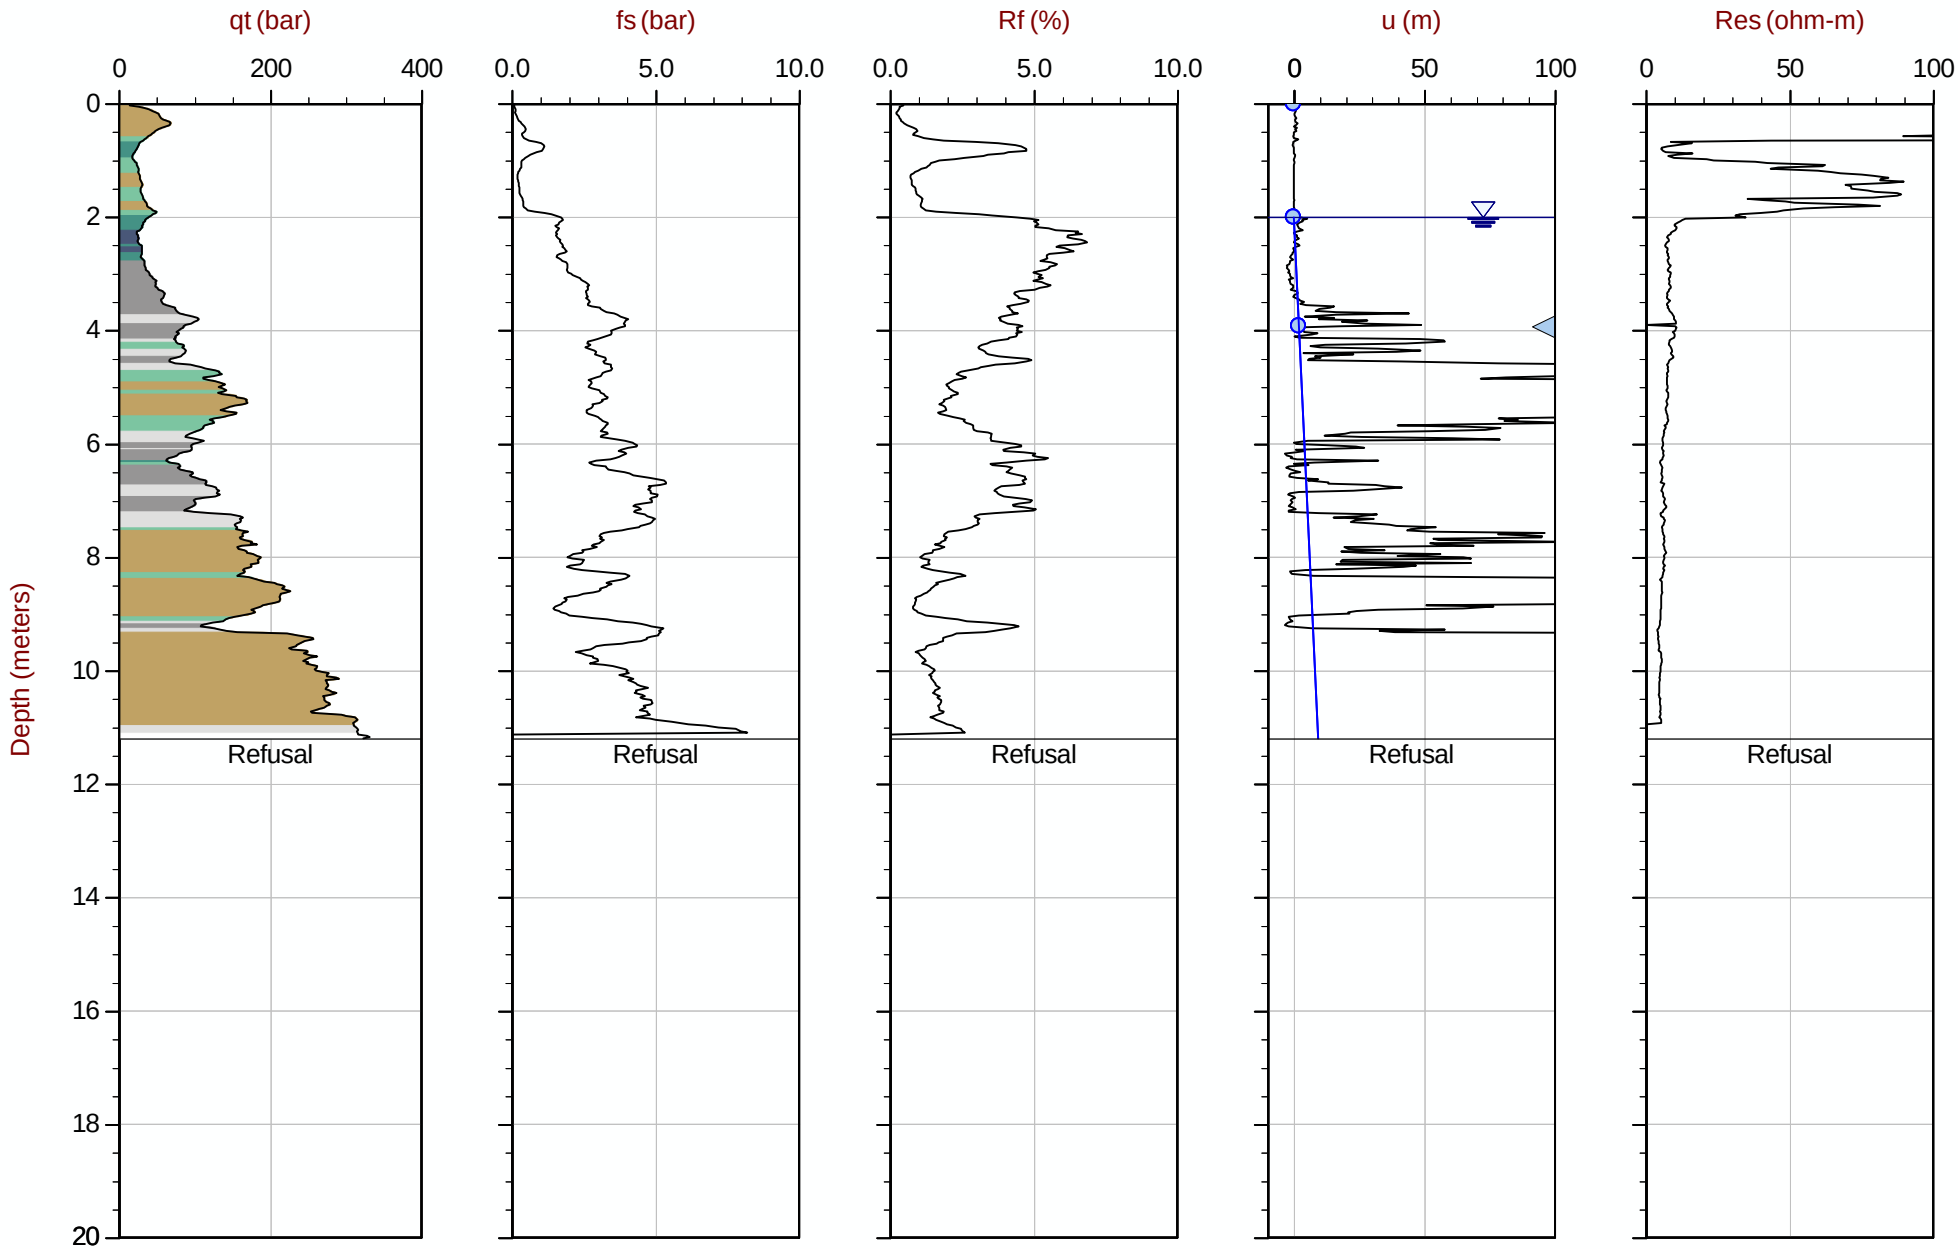

Max Depth: 11.200 m / 36.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT203.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612375m E: 416842m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 09:40
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT204
Cone: 854:T1500F15U35 Area= 15cm2

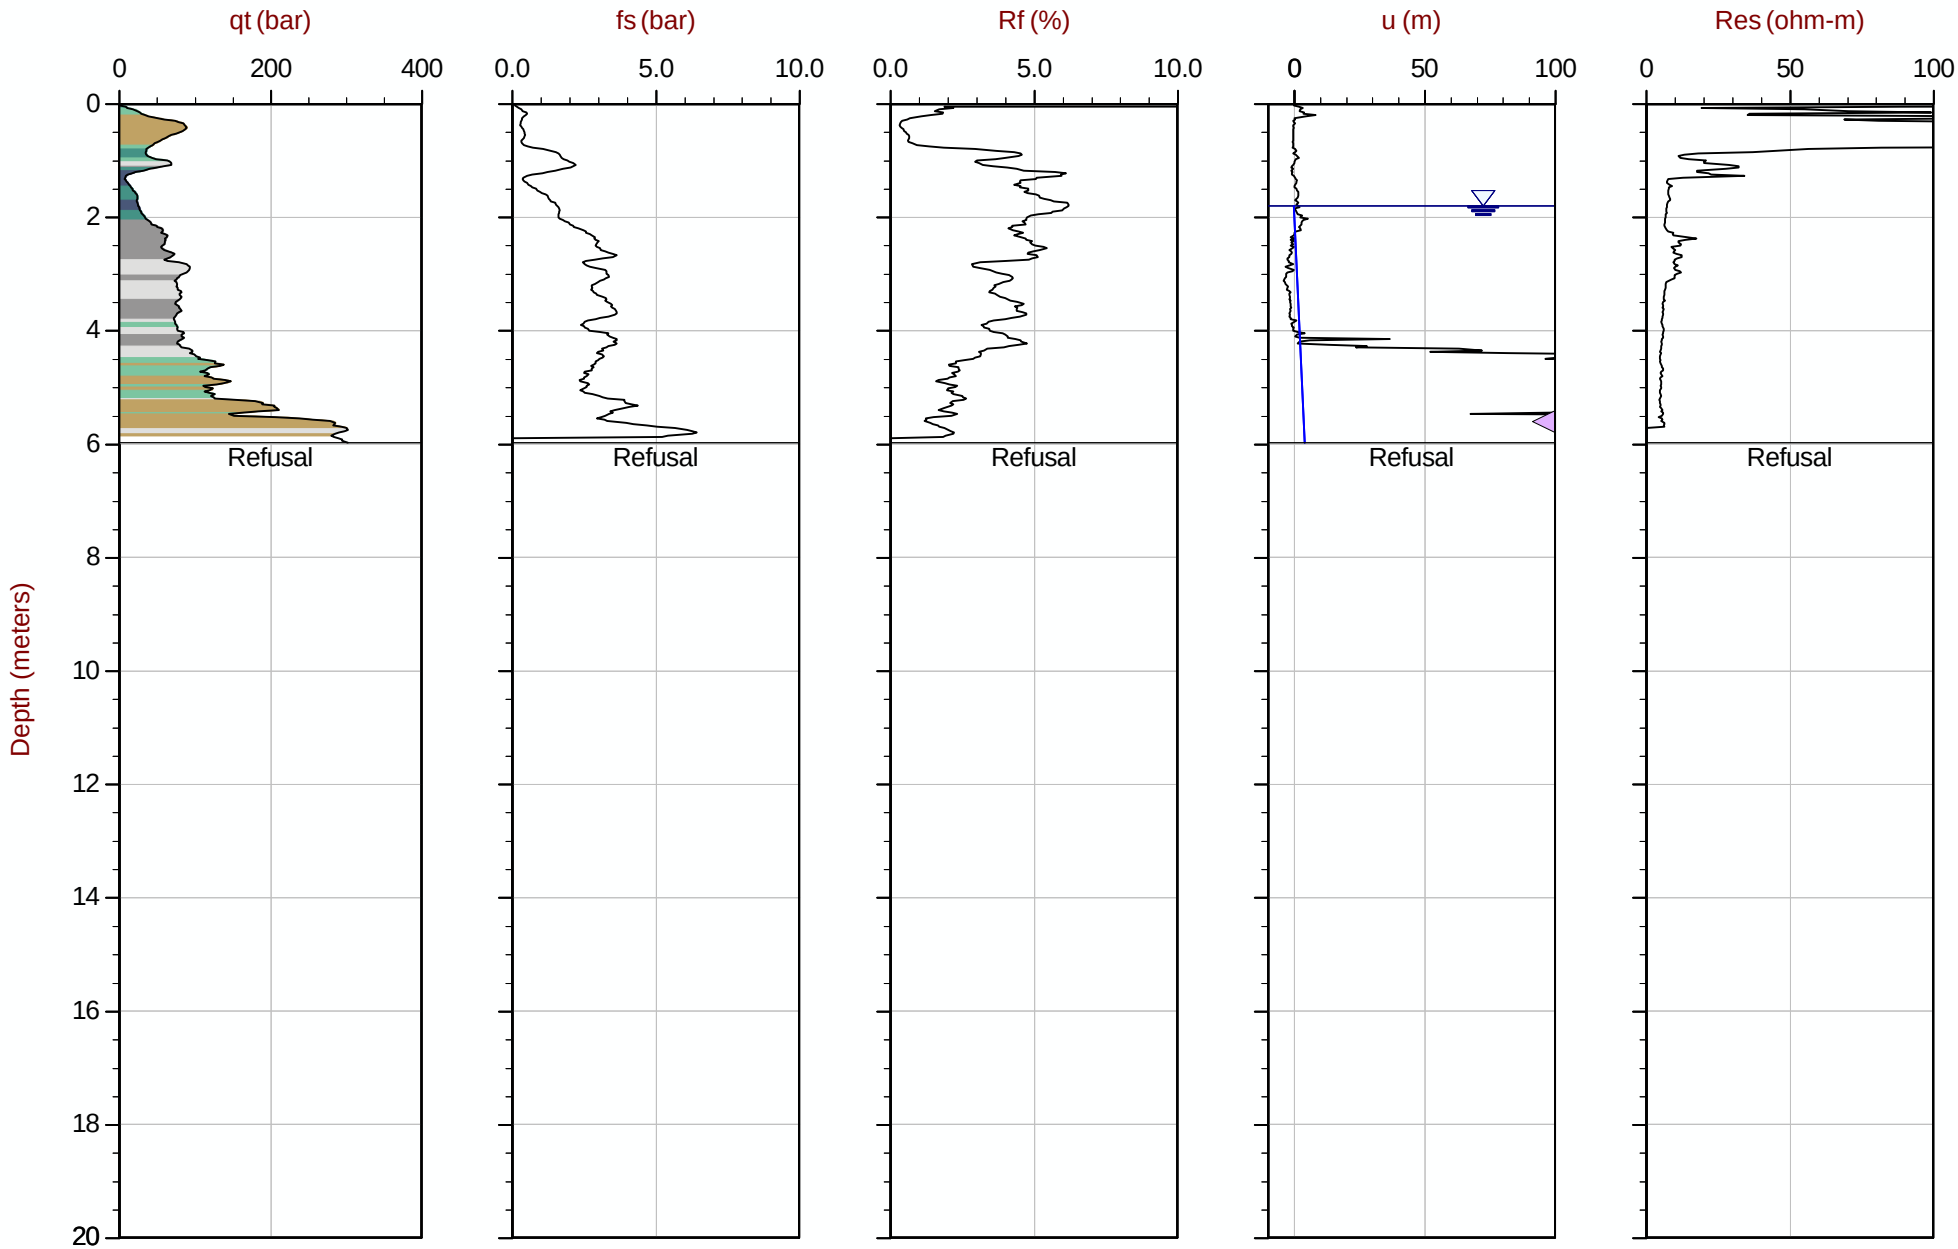

Max Depth: 5.975 m / 19.60 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT204.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612318m E: 416870m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 10:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT205
Cone: 854:T1500F15U35 Area= 15cm2

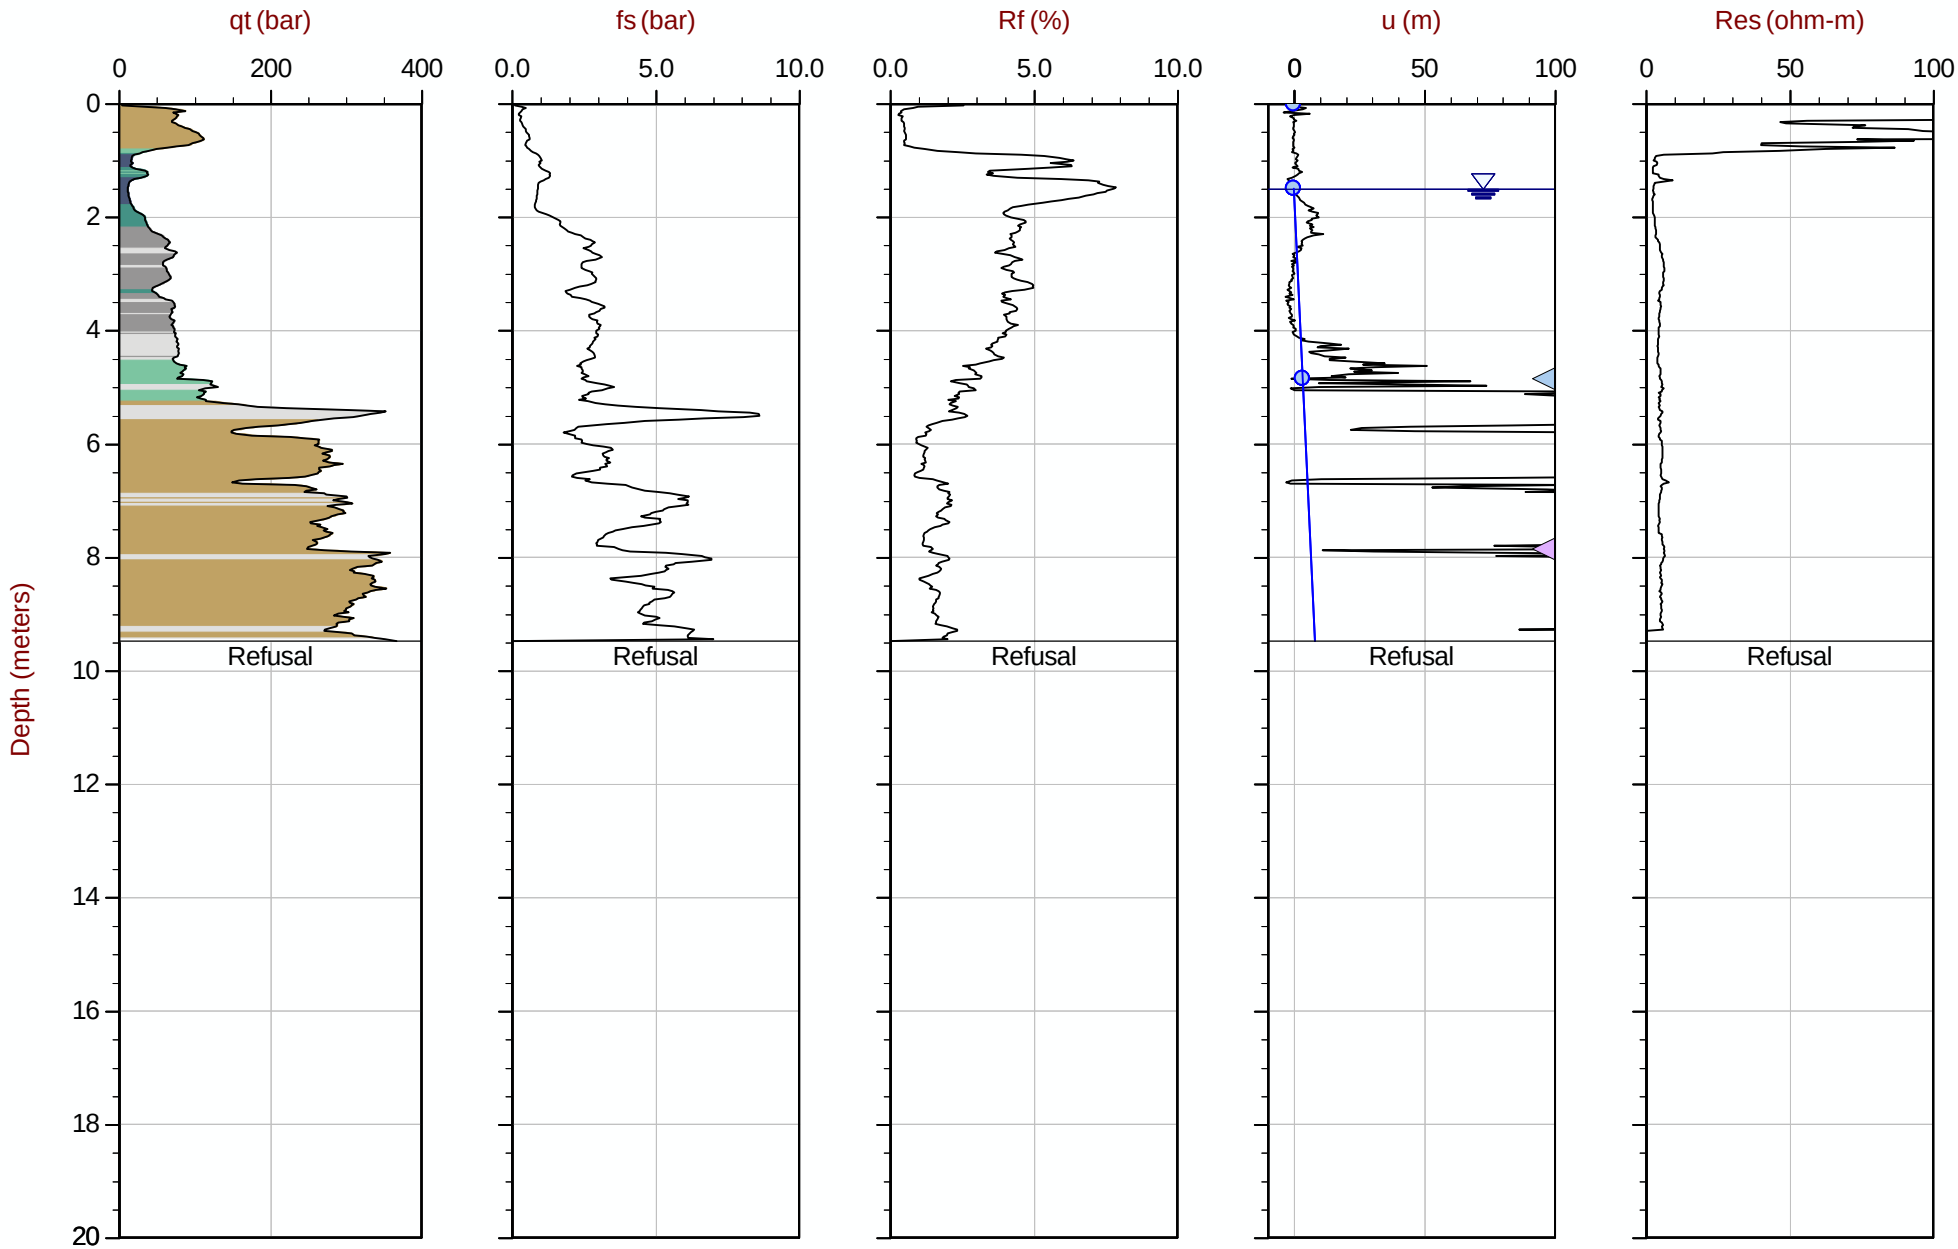

Max Depth: 9.475 m / 31.09 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT205.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612266m E: 416883m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 12:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT206
Cone: 854:T1500F15U35 Area= 15cm2

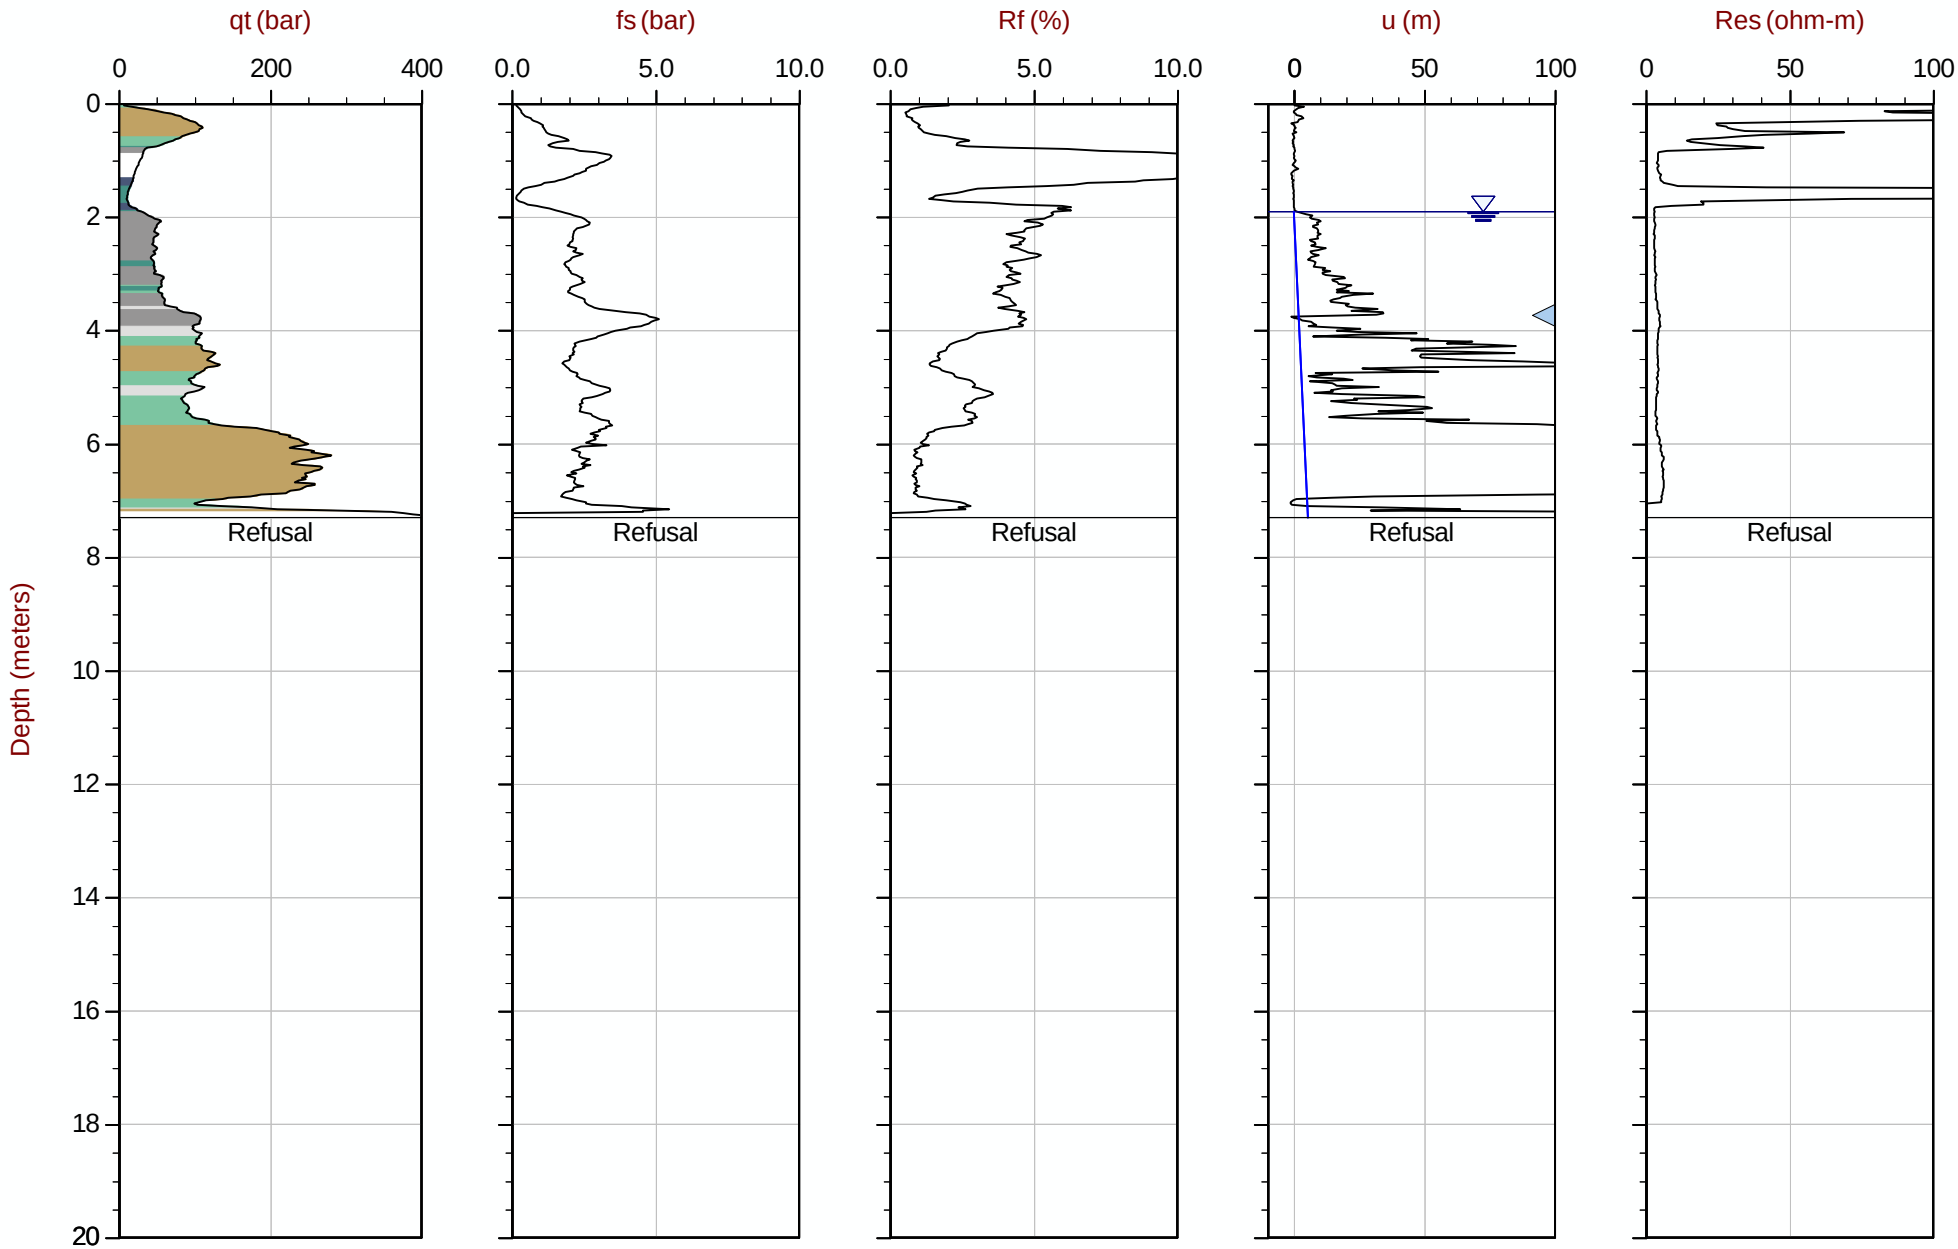

Max Depth: 7.300 m / 23.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT206.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612209m E: 416886m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 13:30
Site: Brooks, Alberta

Sounding: RCPT22-22CPT207
Cone: 854:T1500F15U35 Area= 15cm2

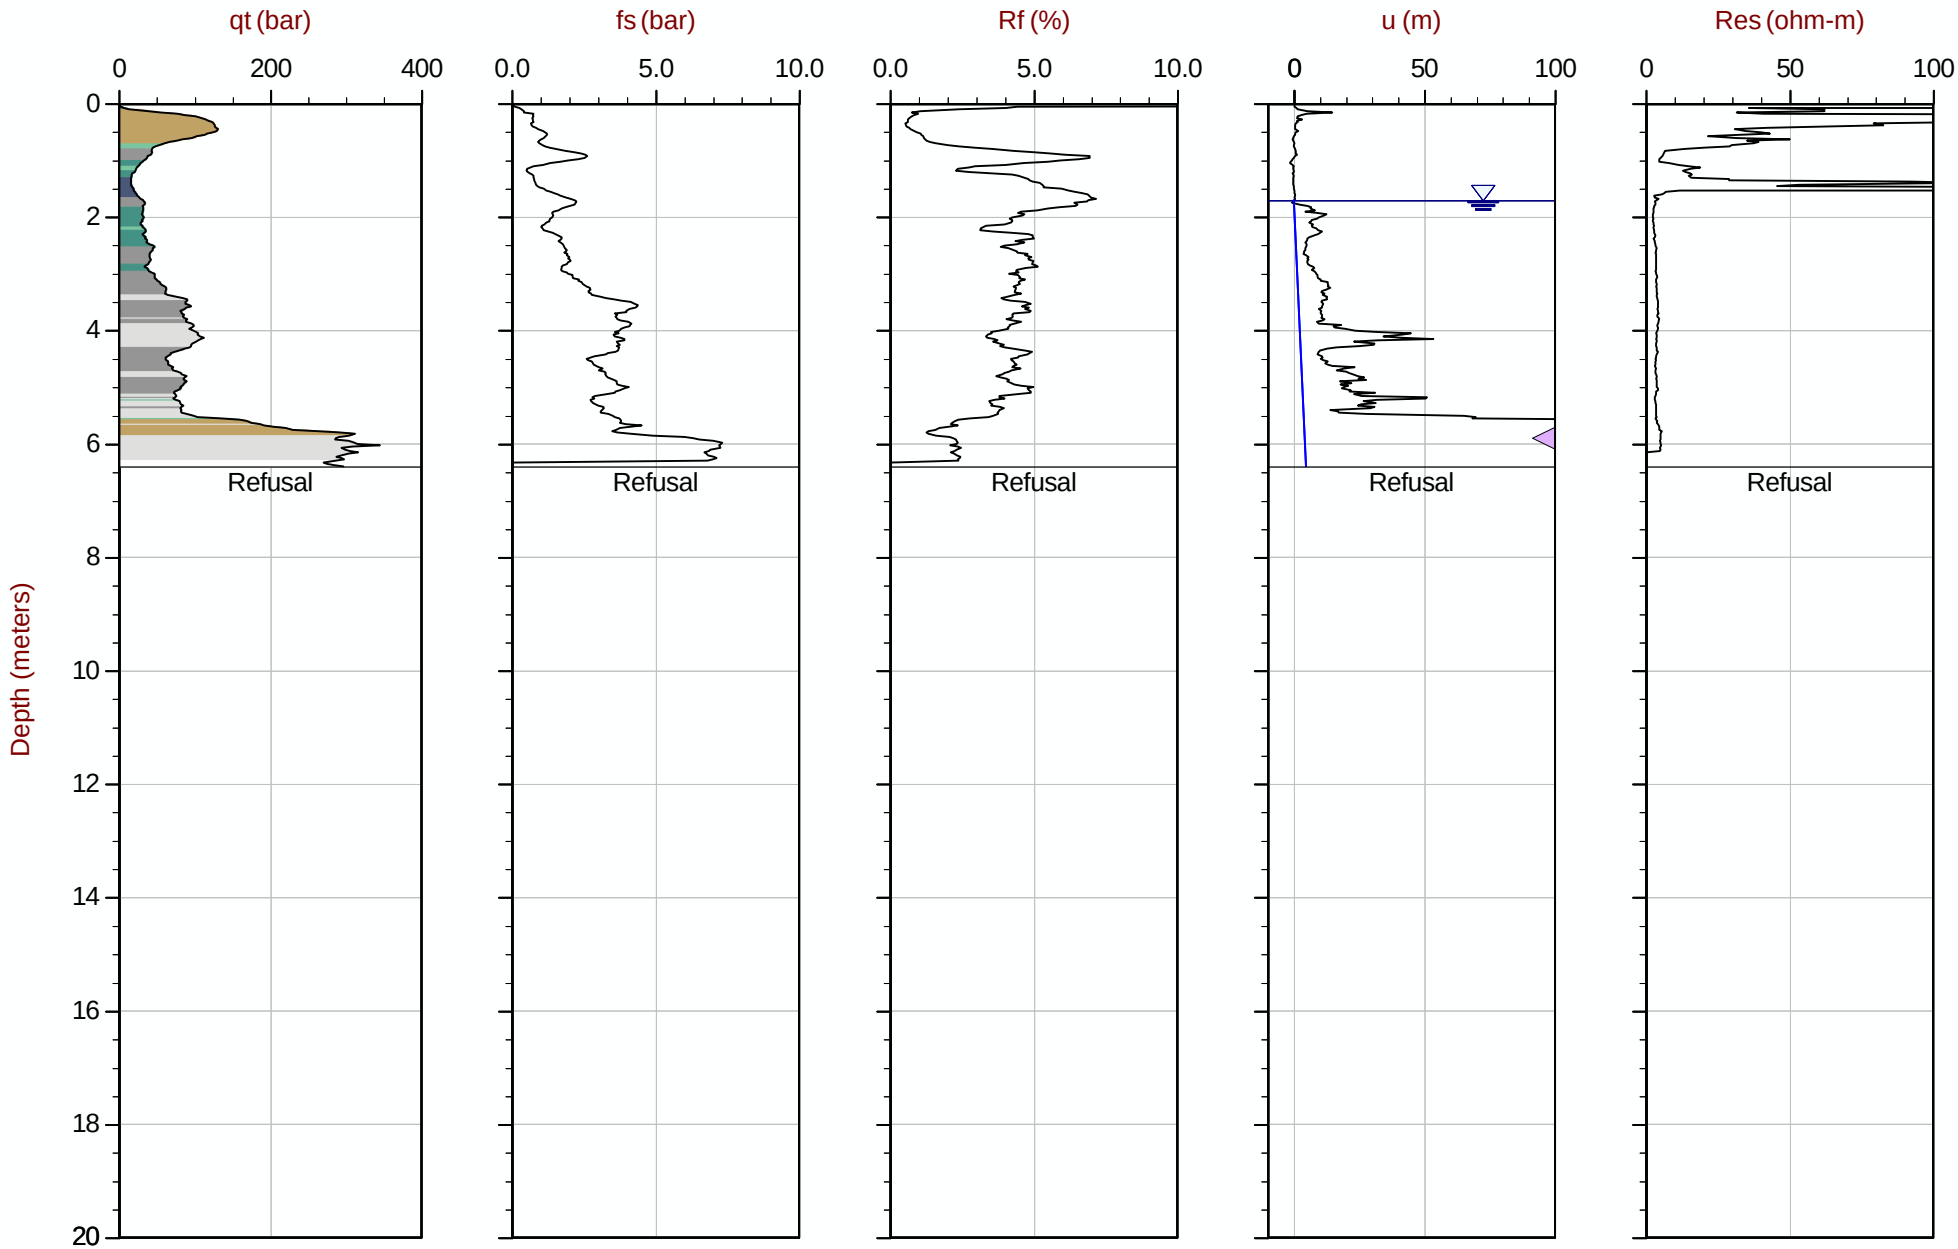

Max Depth: 6.400 m / 21.00 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT207.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612157m E: 416885m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 14:06
Site: Brooks Alberta

Sounding: RCPT22-22CPT208
Cone: 854:T1500F15U35 Area= 15cm2

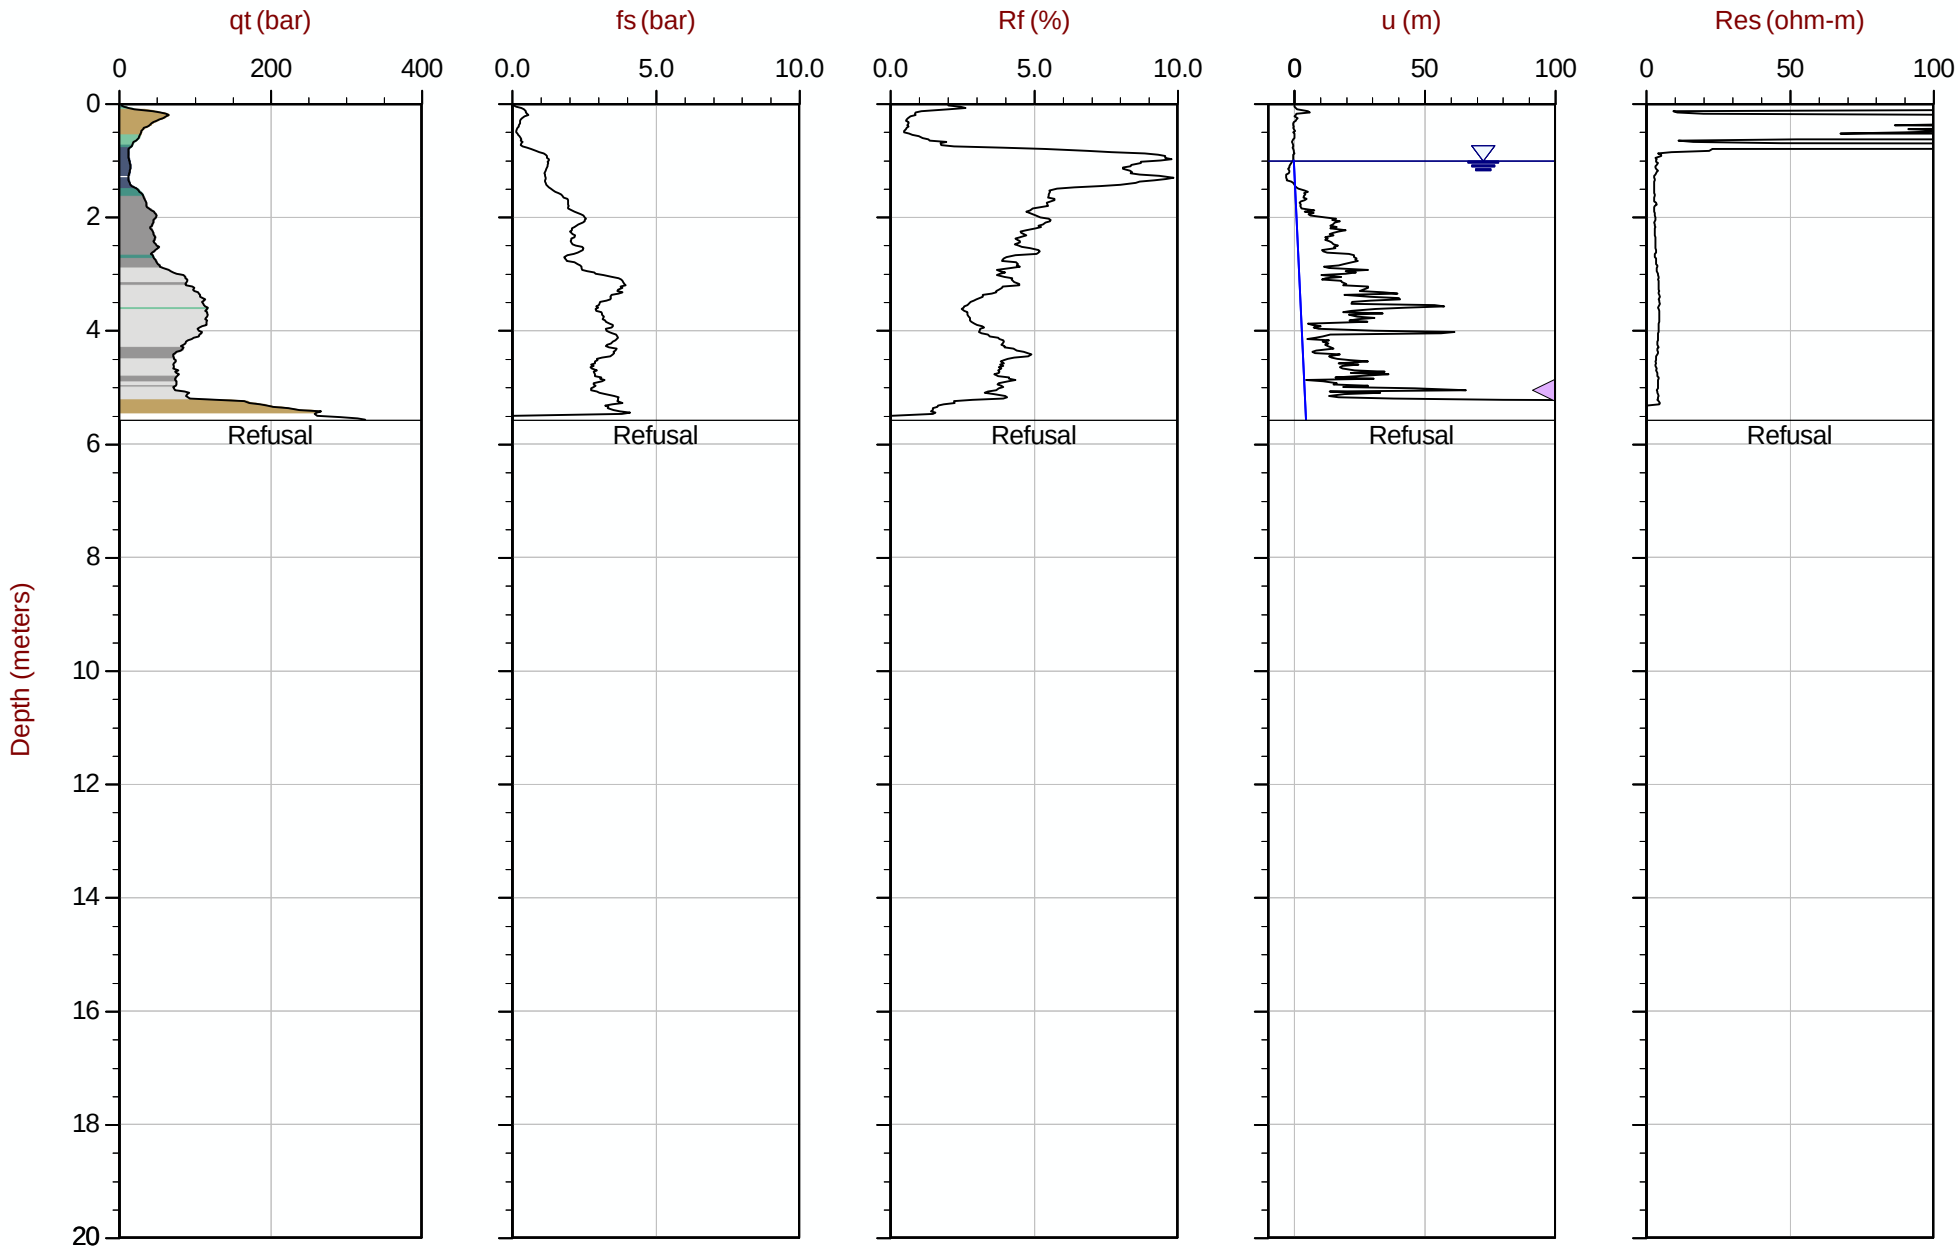

Max Depth: 5.575 m / 18.29 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT208.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612109m E: 416884m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 15:07
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT209
Cone: 854:T1500F15U35 Area= 15cm2

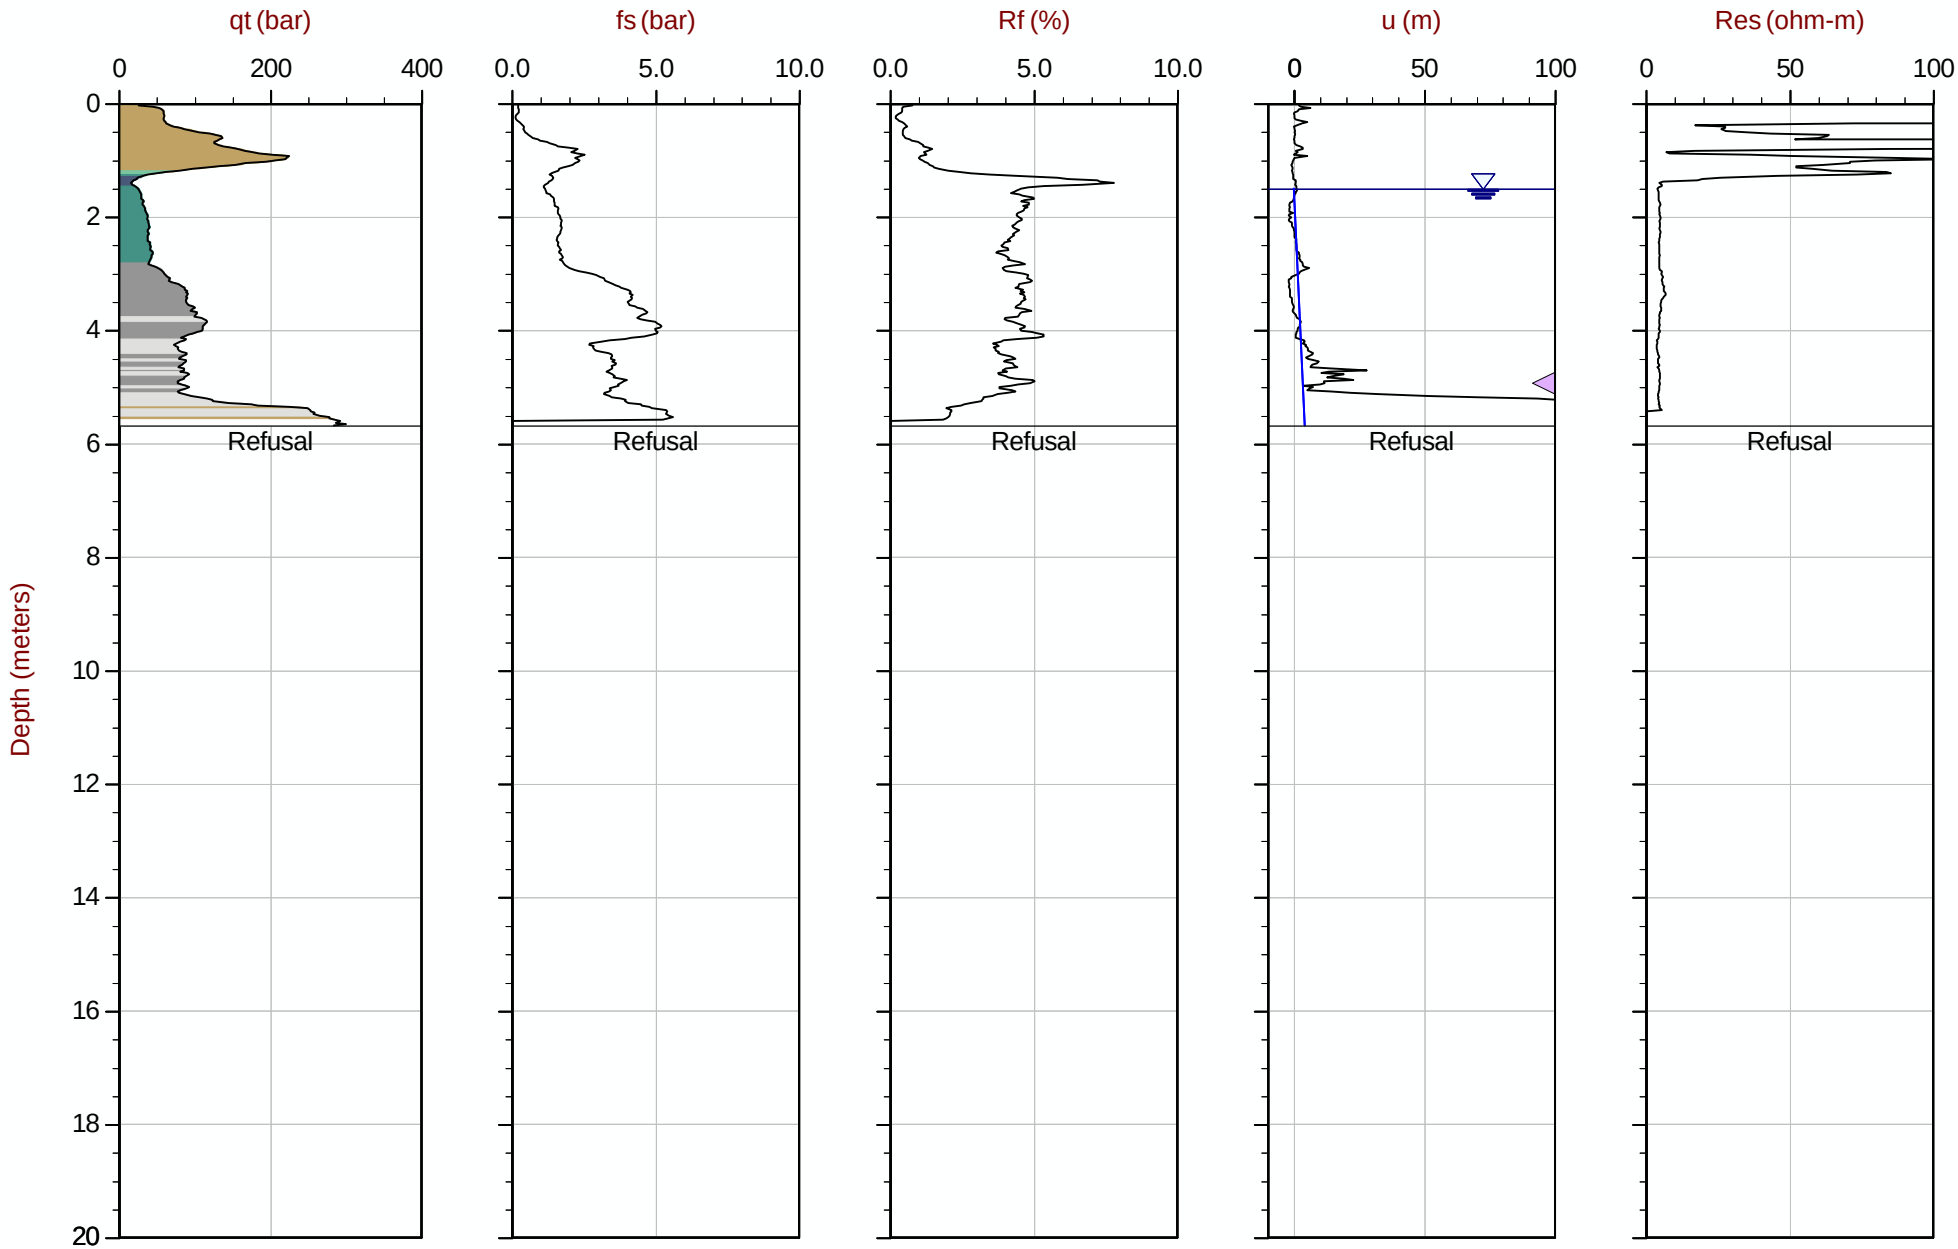

Max Depth: 5.675 m / 18.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT209.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612057m E: 416883m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 15:55
Site: Brooks, Alberta

Sounding: RCPT22-22CPT210
Cone: 854:T1500F15U35 Area= 15cm2

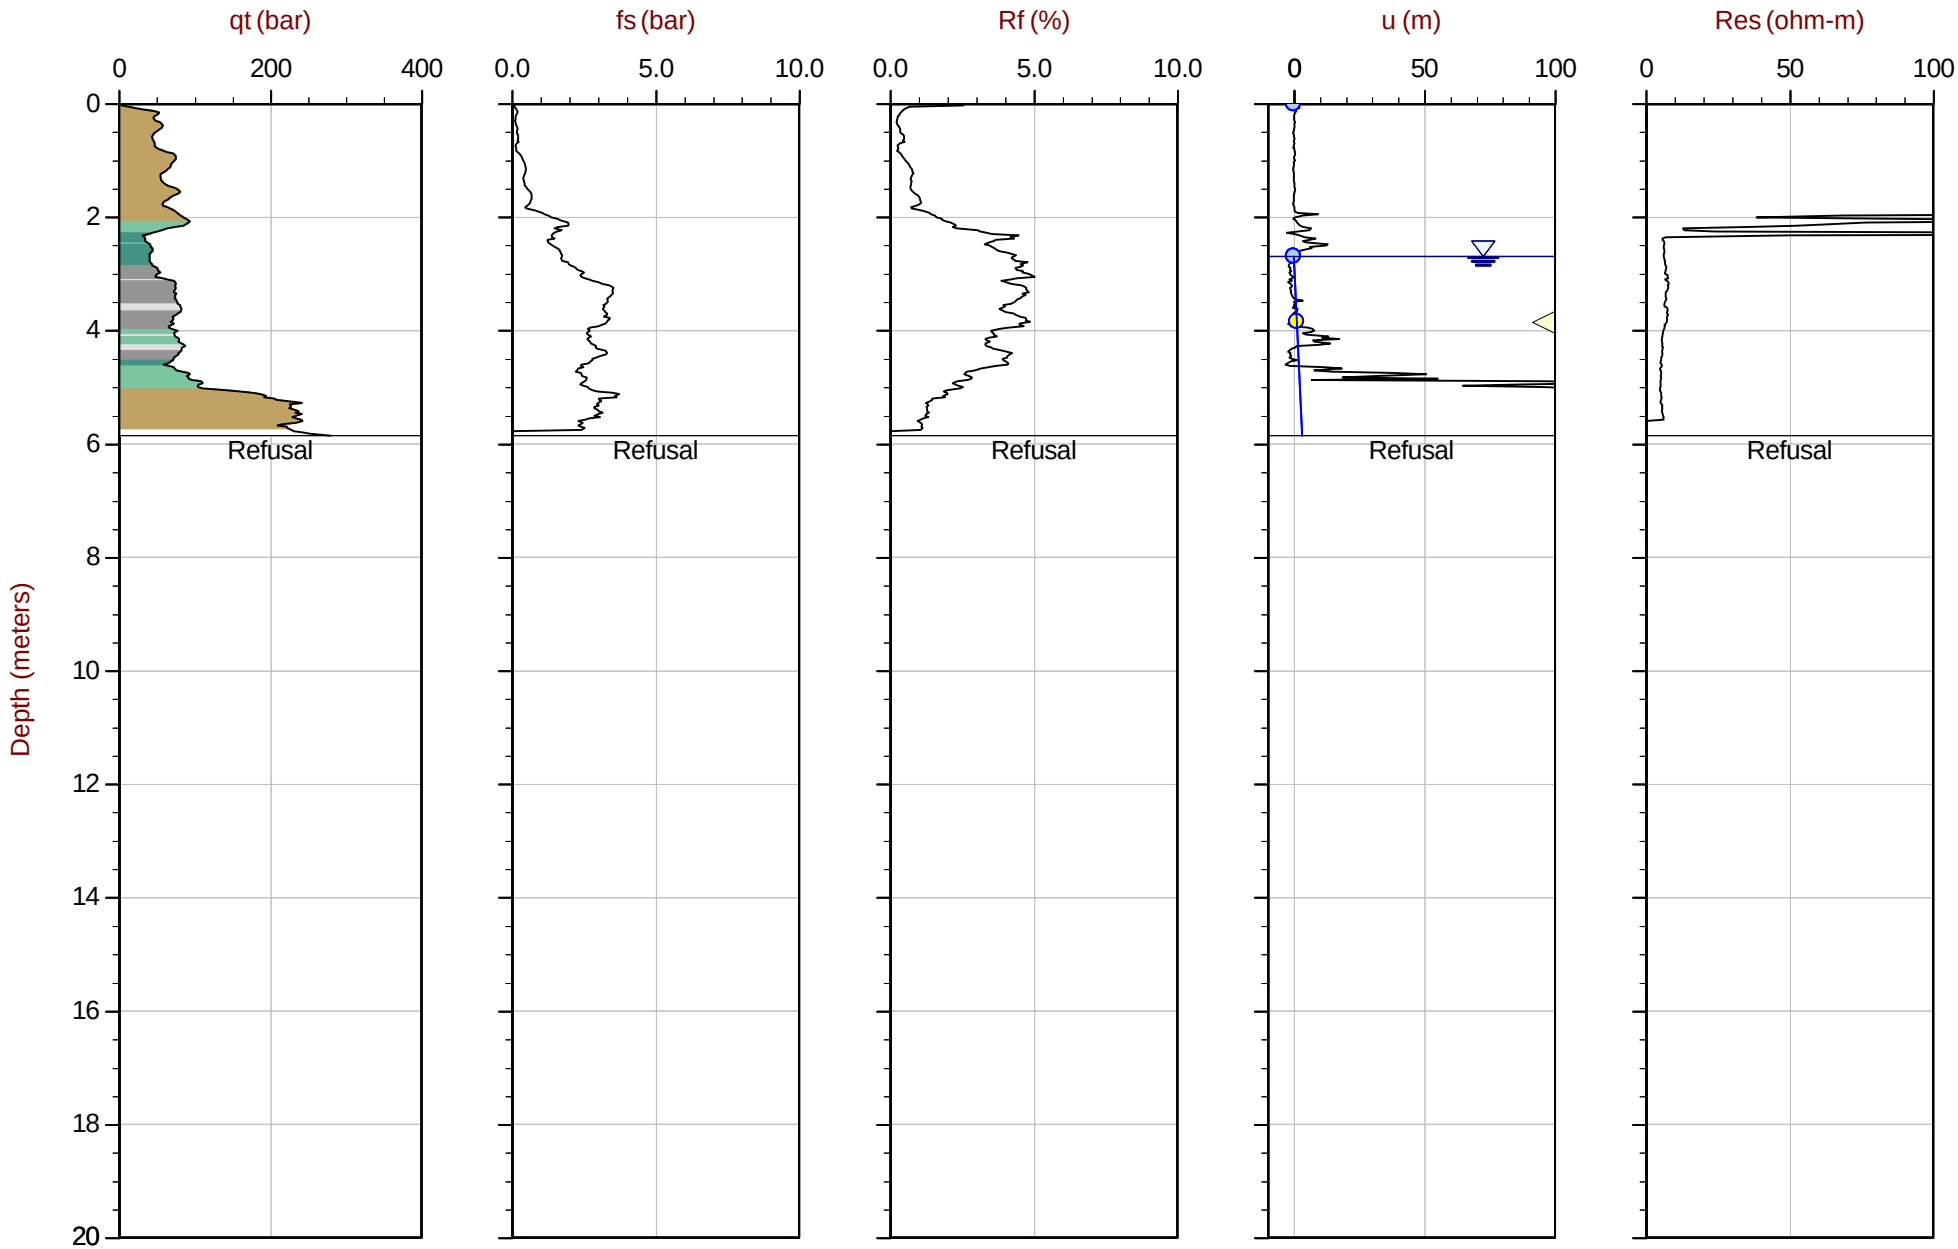

Max Depth: 5.850 m / 19.19 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT210.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612008m E: 416881m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 16:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT211
Cone: 854:T1500F15U35 Area= 15cm2

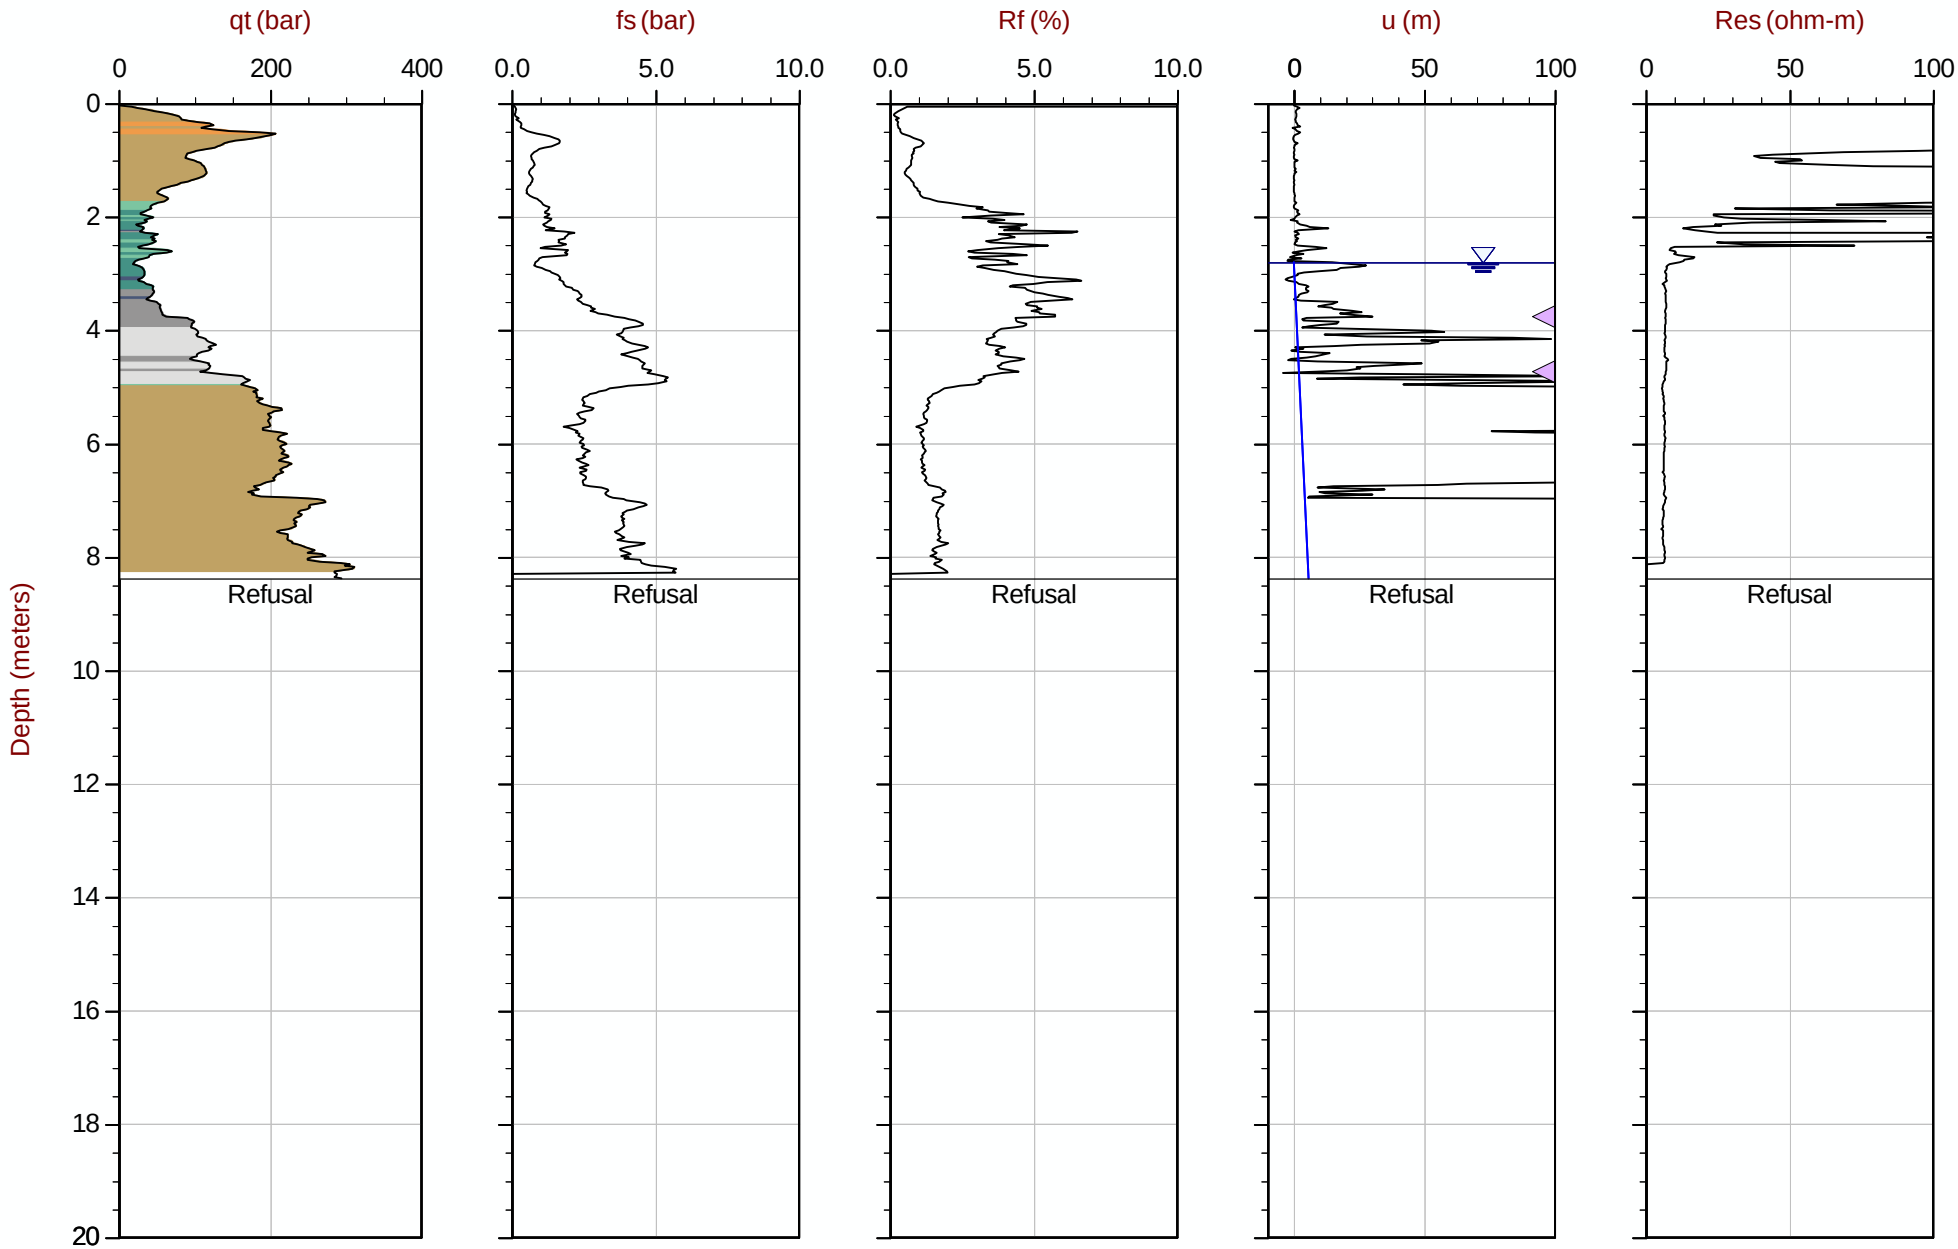

Max Depth: 8.375 m / 27.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT211.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611957m E: 416880m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 17:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT212
Cone: 854:T1500F15U35 Area= 15cm2

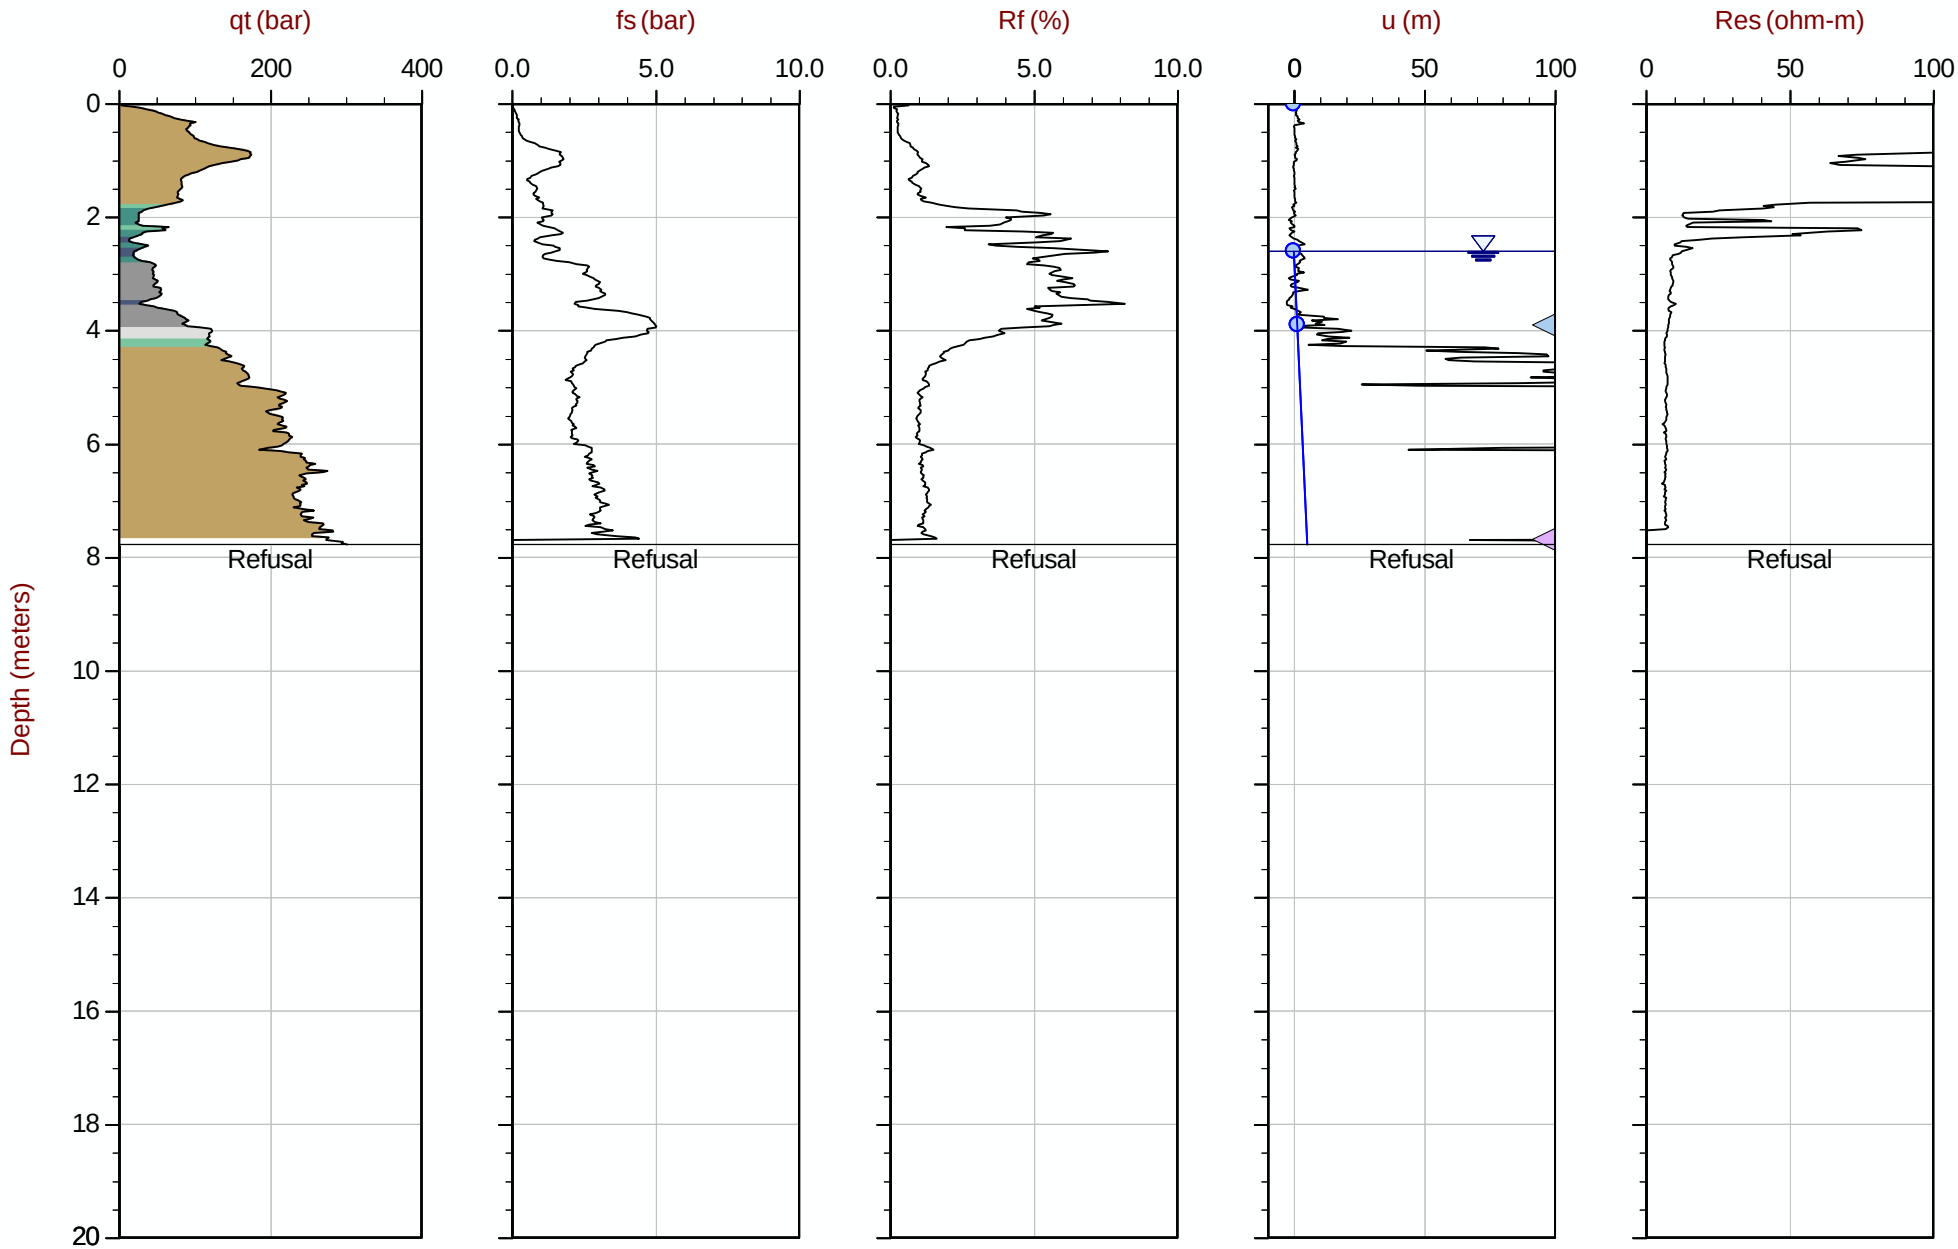

Max Depth: 7.775 m / 25.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT212.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611908m E: 416879m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 06:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT213
Cone: 854:T1500F15U35 Area= 15cm2

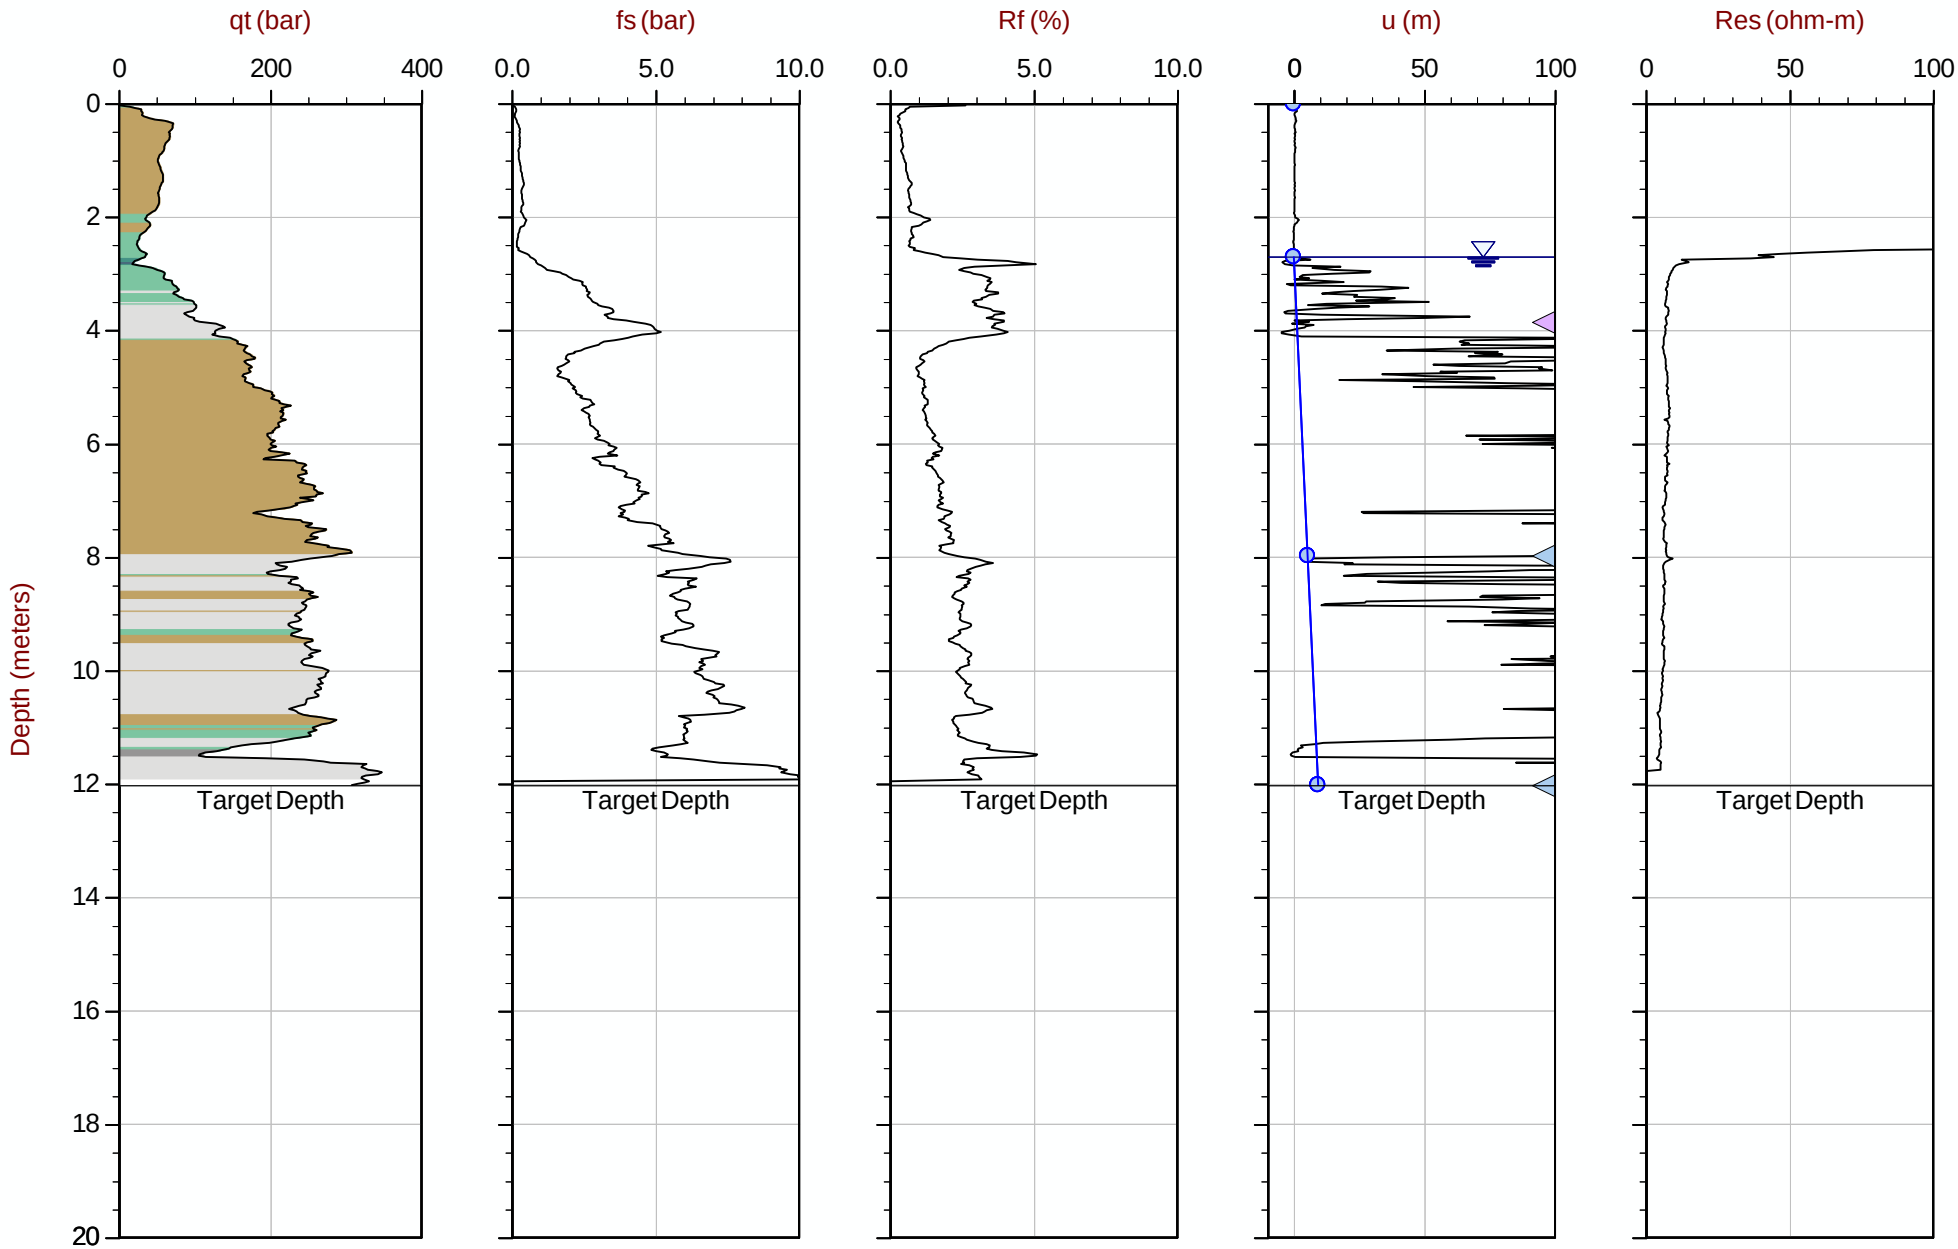

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT213.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611857m E: 416878m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 08:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT214
Cone: 854:T1500F15U35 Area= 15cm2

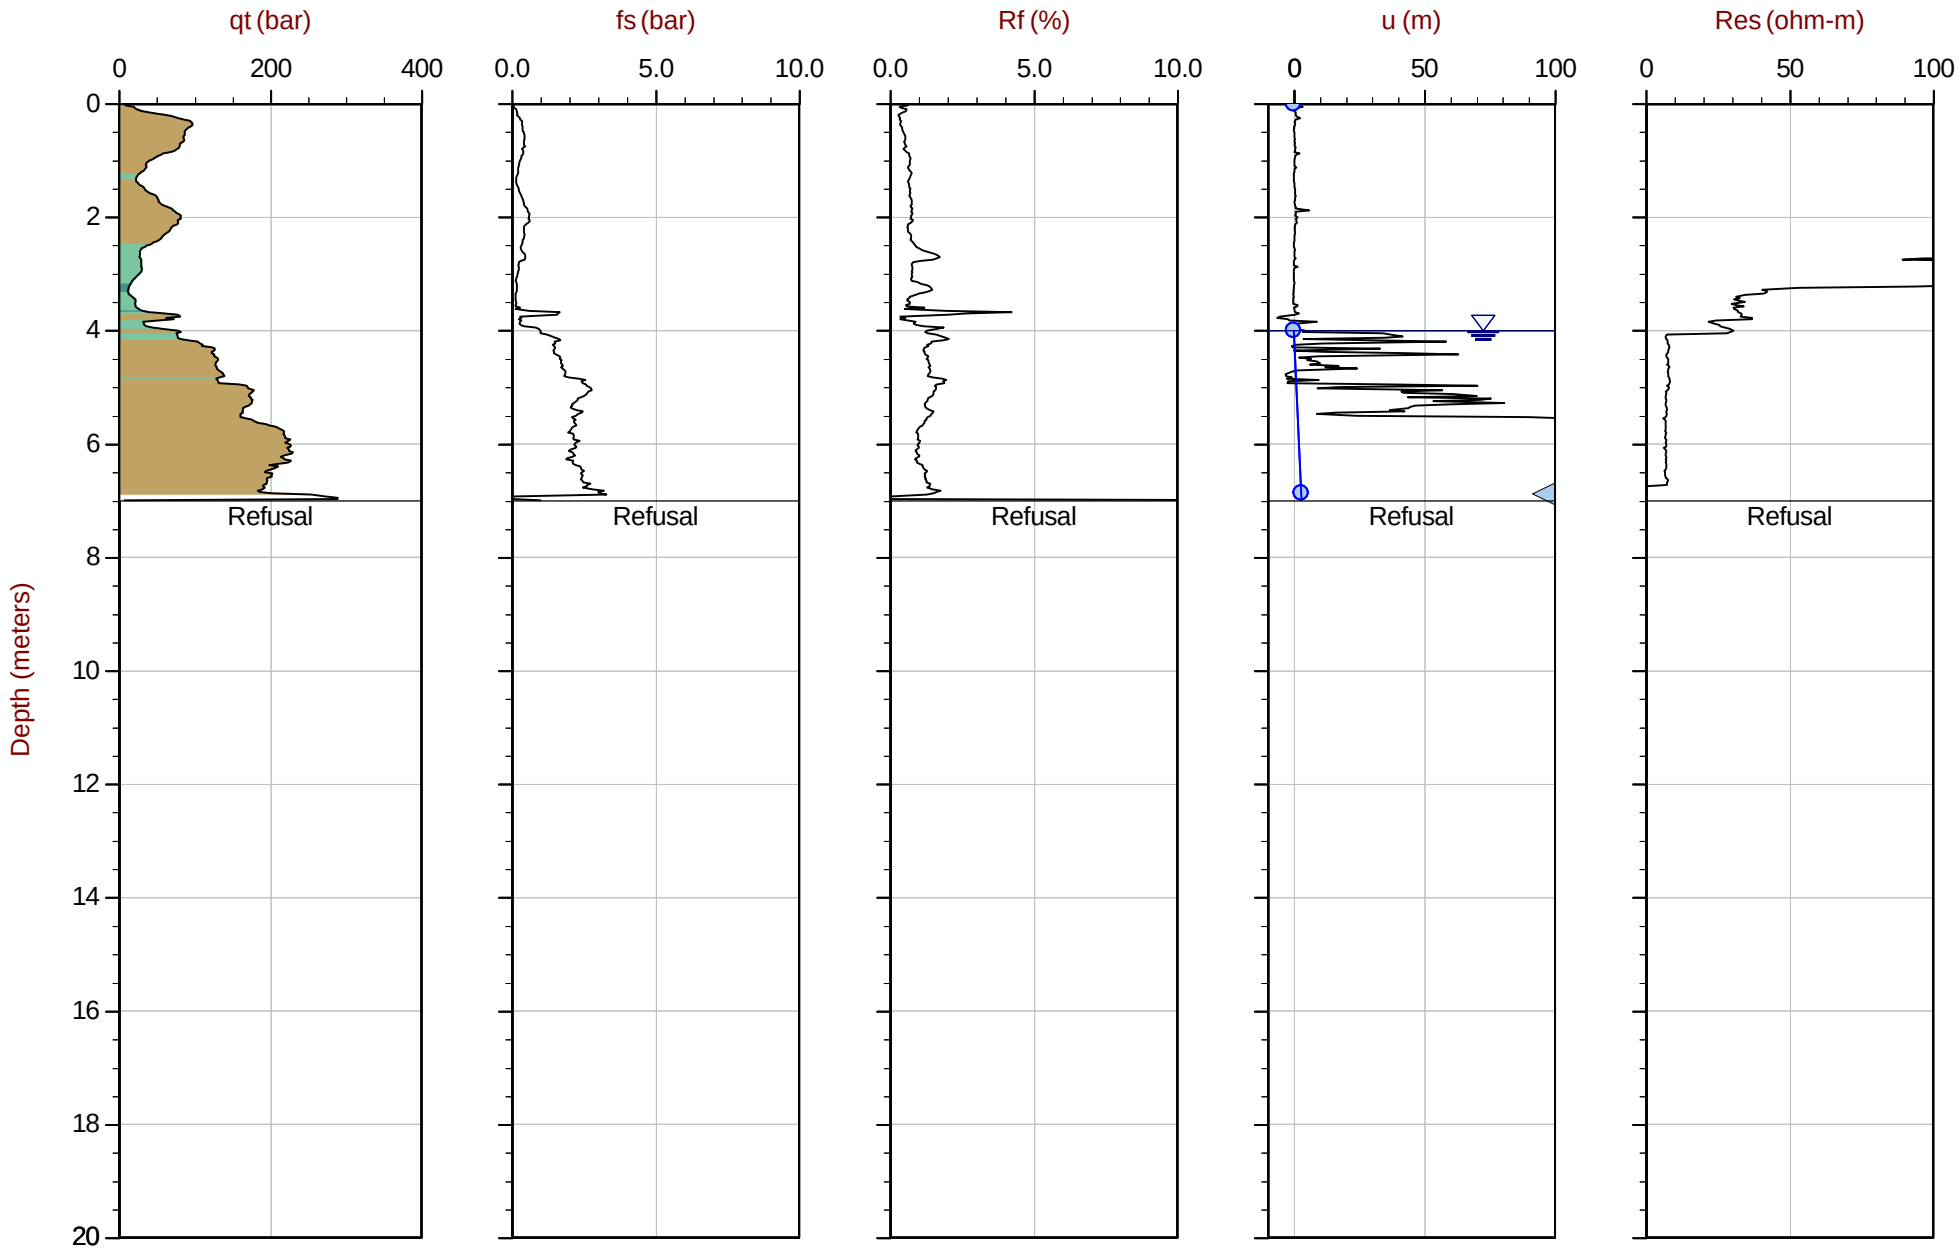

Max Depth: 7.000 m / 22.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT214.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611810m E: 416877m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 09:20
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT215
Cone: 854:T1500F15U35 Area= 15cm2

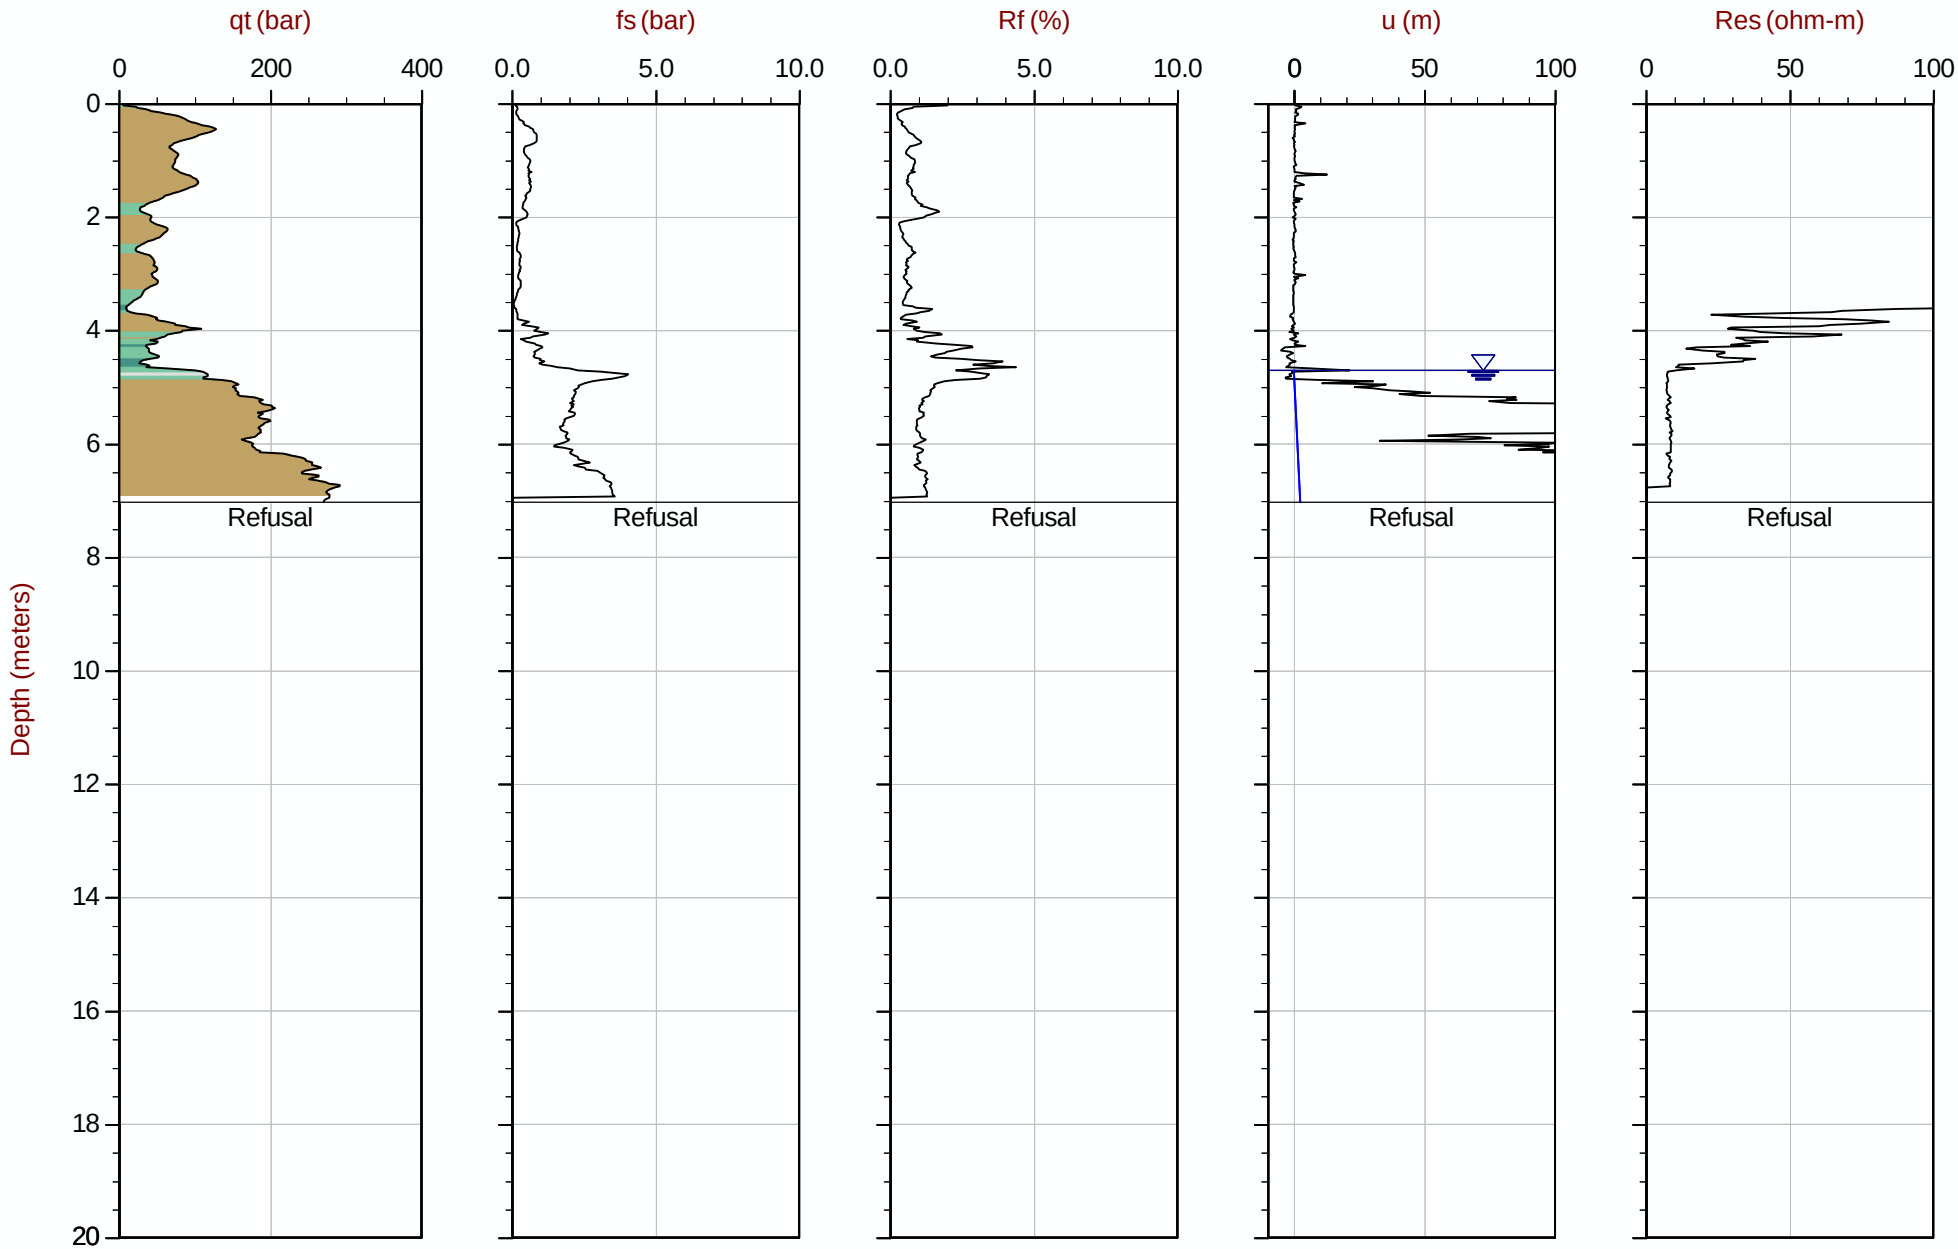

Max Depth: 7.025 m / 23.05 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT215.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611757m E: 416875m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 10:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT216
Cone: 854:T1500F15U35 Area= 15cm2

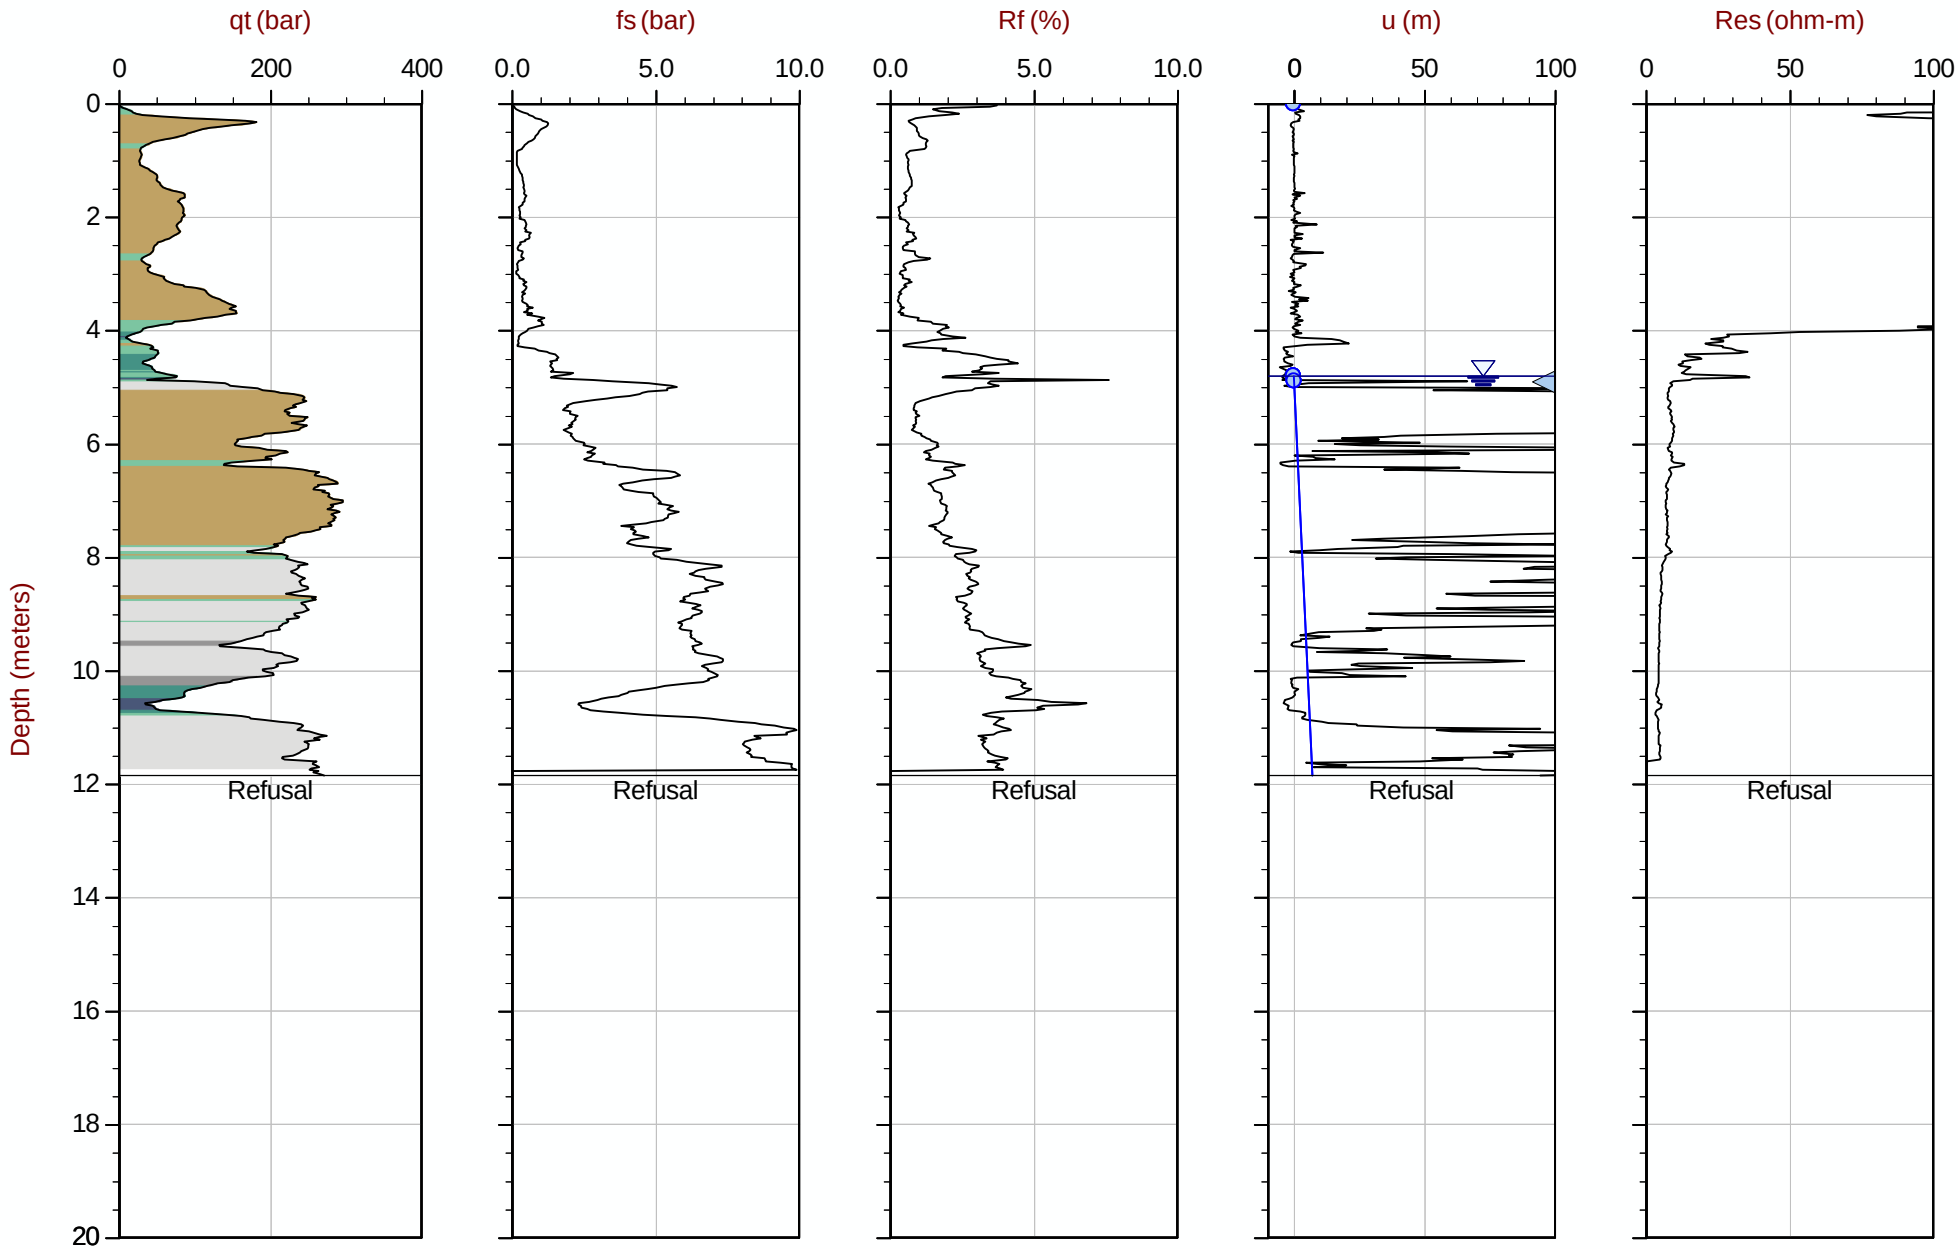

Max Depth: 11.850 m / 38.88 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT216.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611708m E: 416874m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 11:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT217
Cone: 854:T1500F15U35 Area= 15cm2

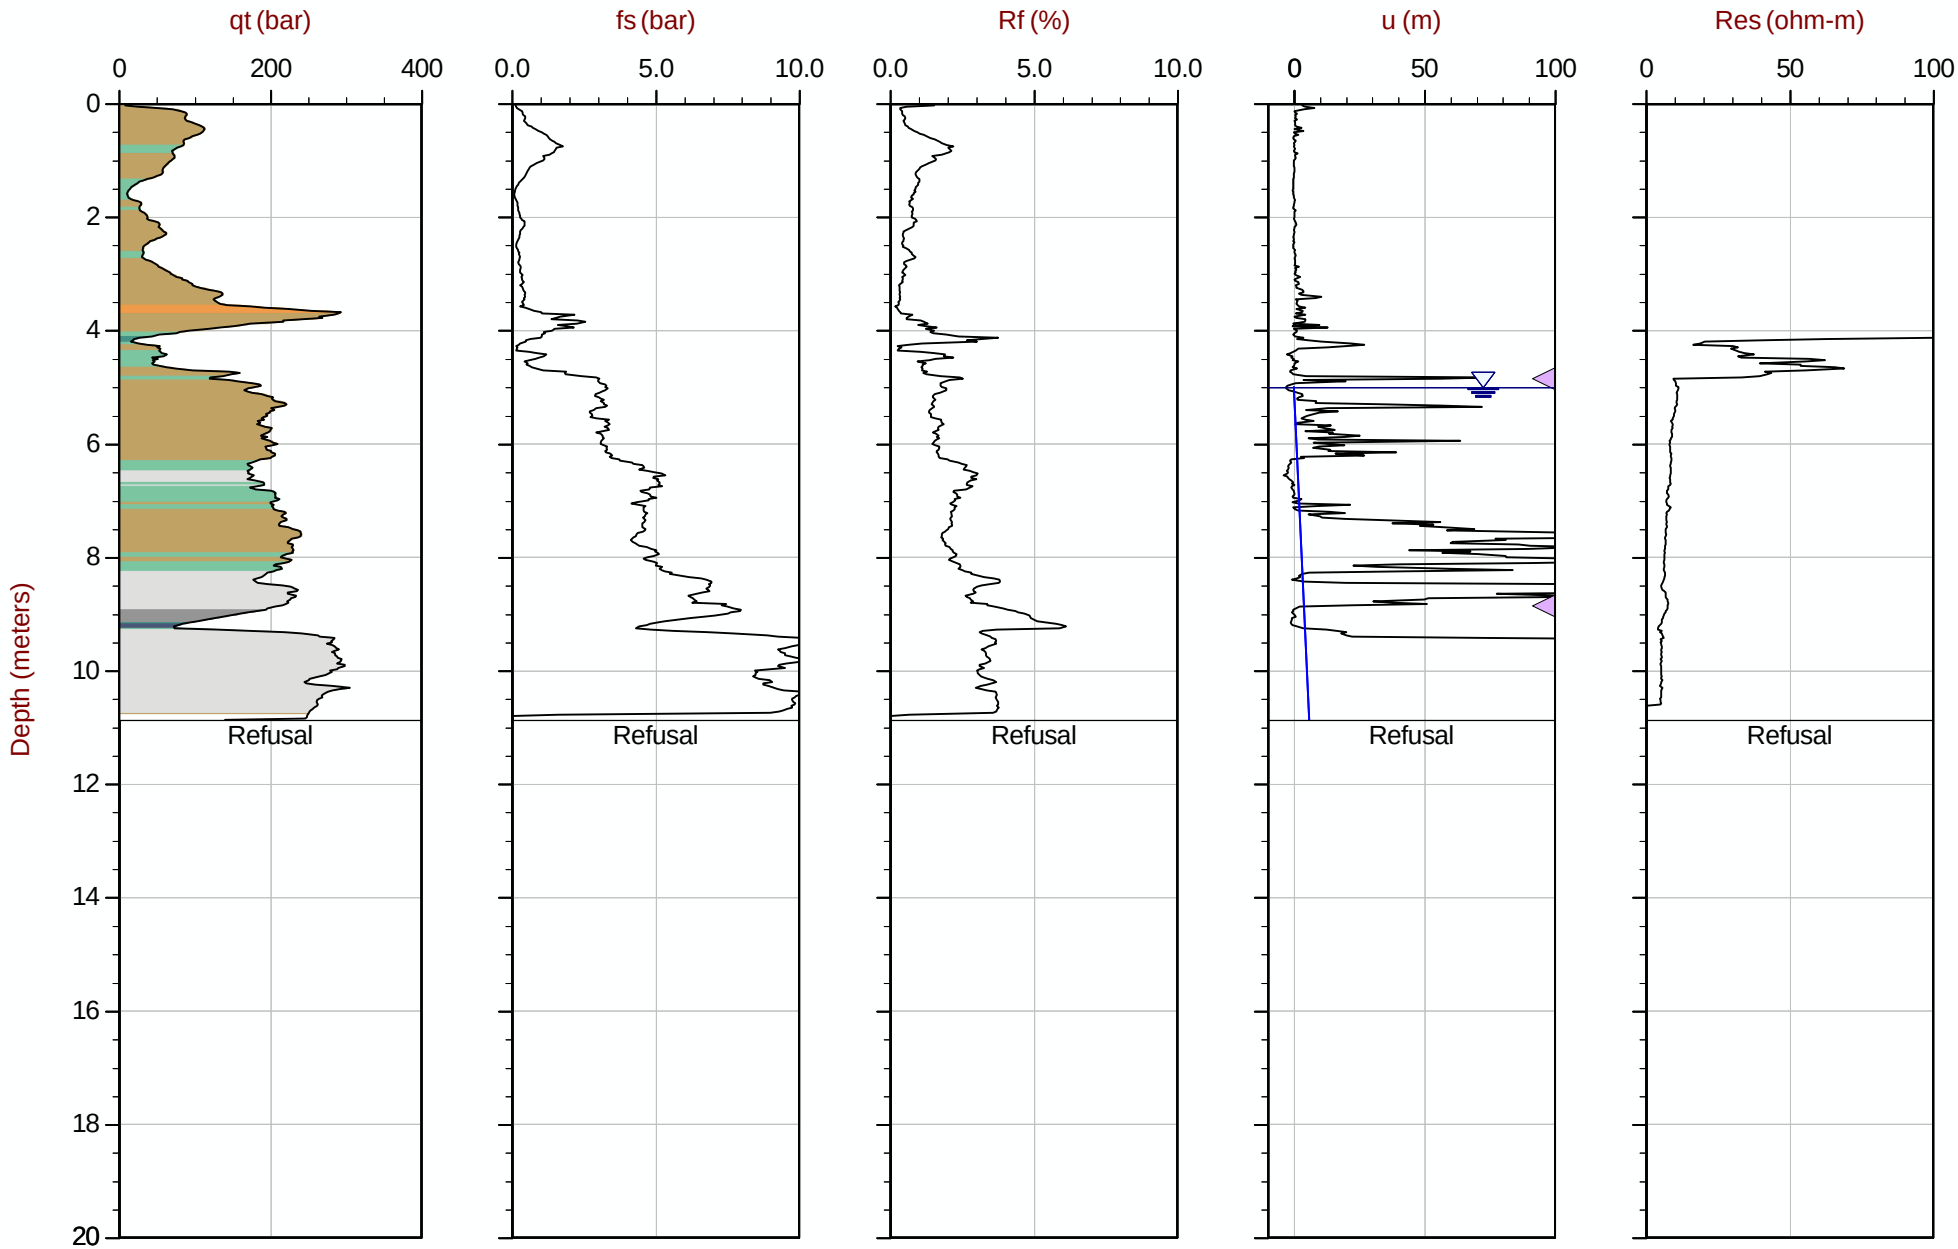

Max Depth: 10.875 m / 35.68 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT217.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611657m E: 416873m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT218
Cone: 854:T1500F15U35 Area= 15cm2

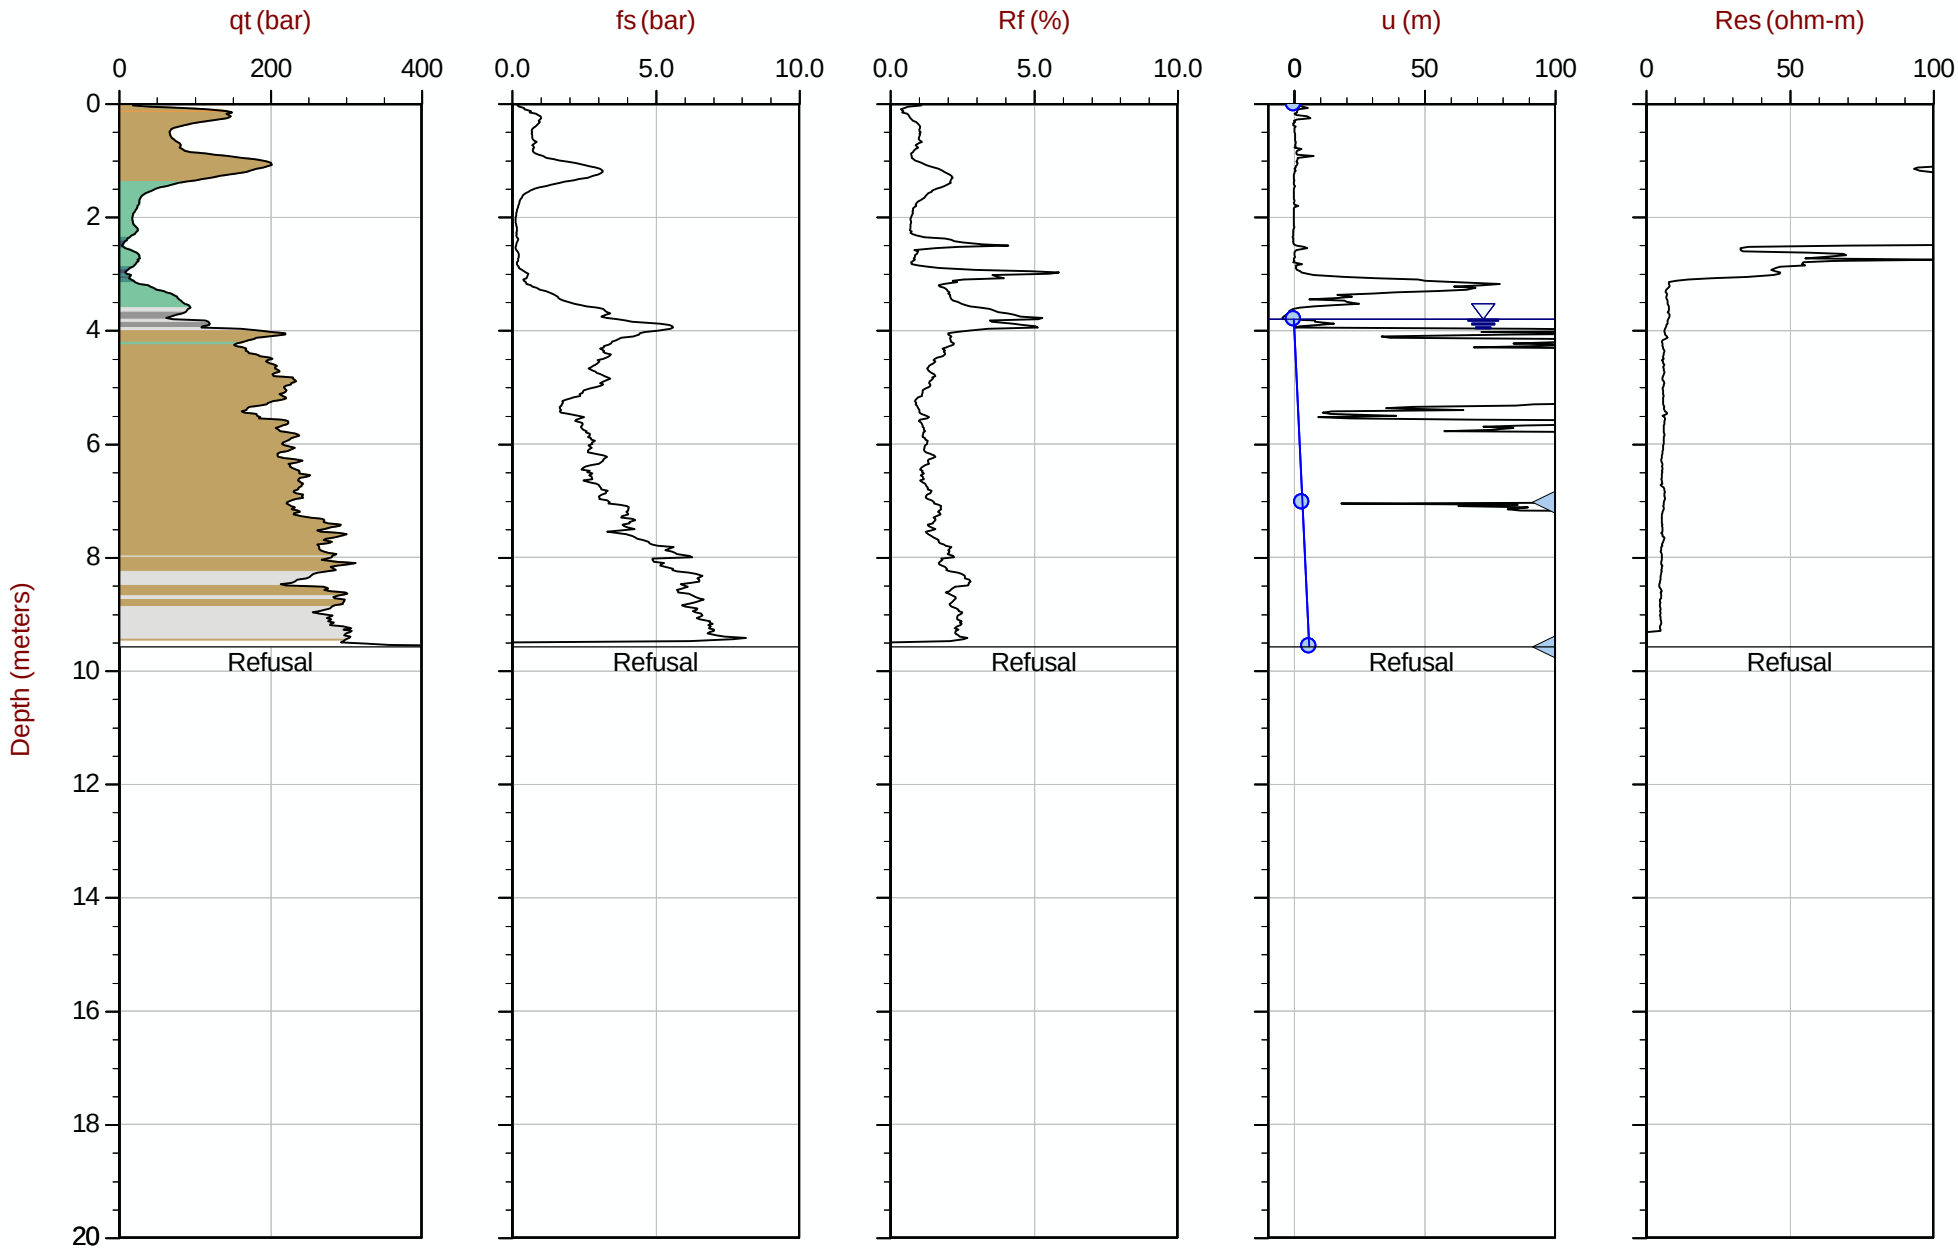

Max Depth: 9.575 m / 31.41 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT218.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611608m E: 416872m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 14:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT219
Cone: 854:T1500F15U35 Area= 15cm2

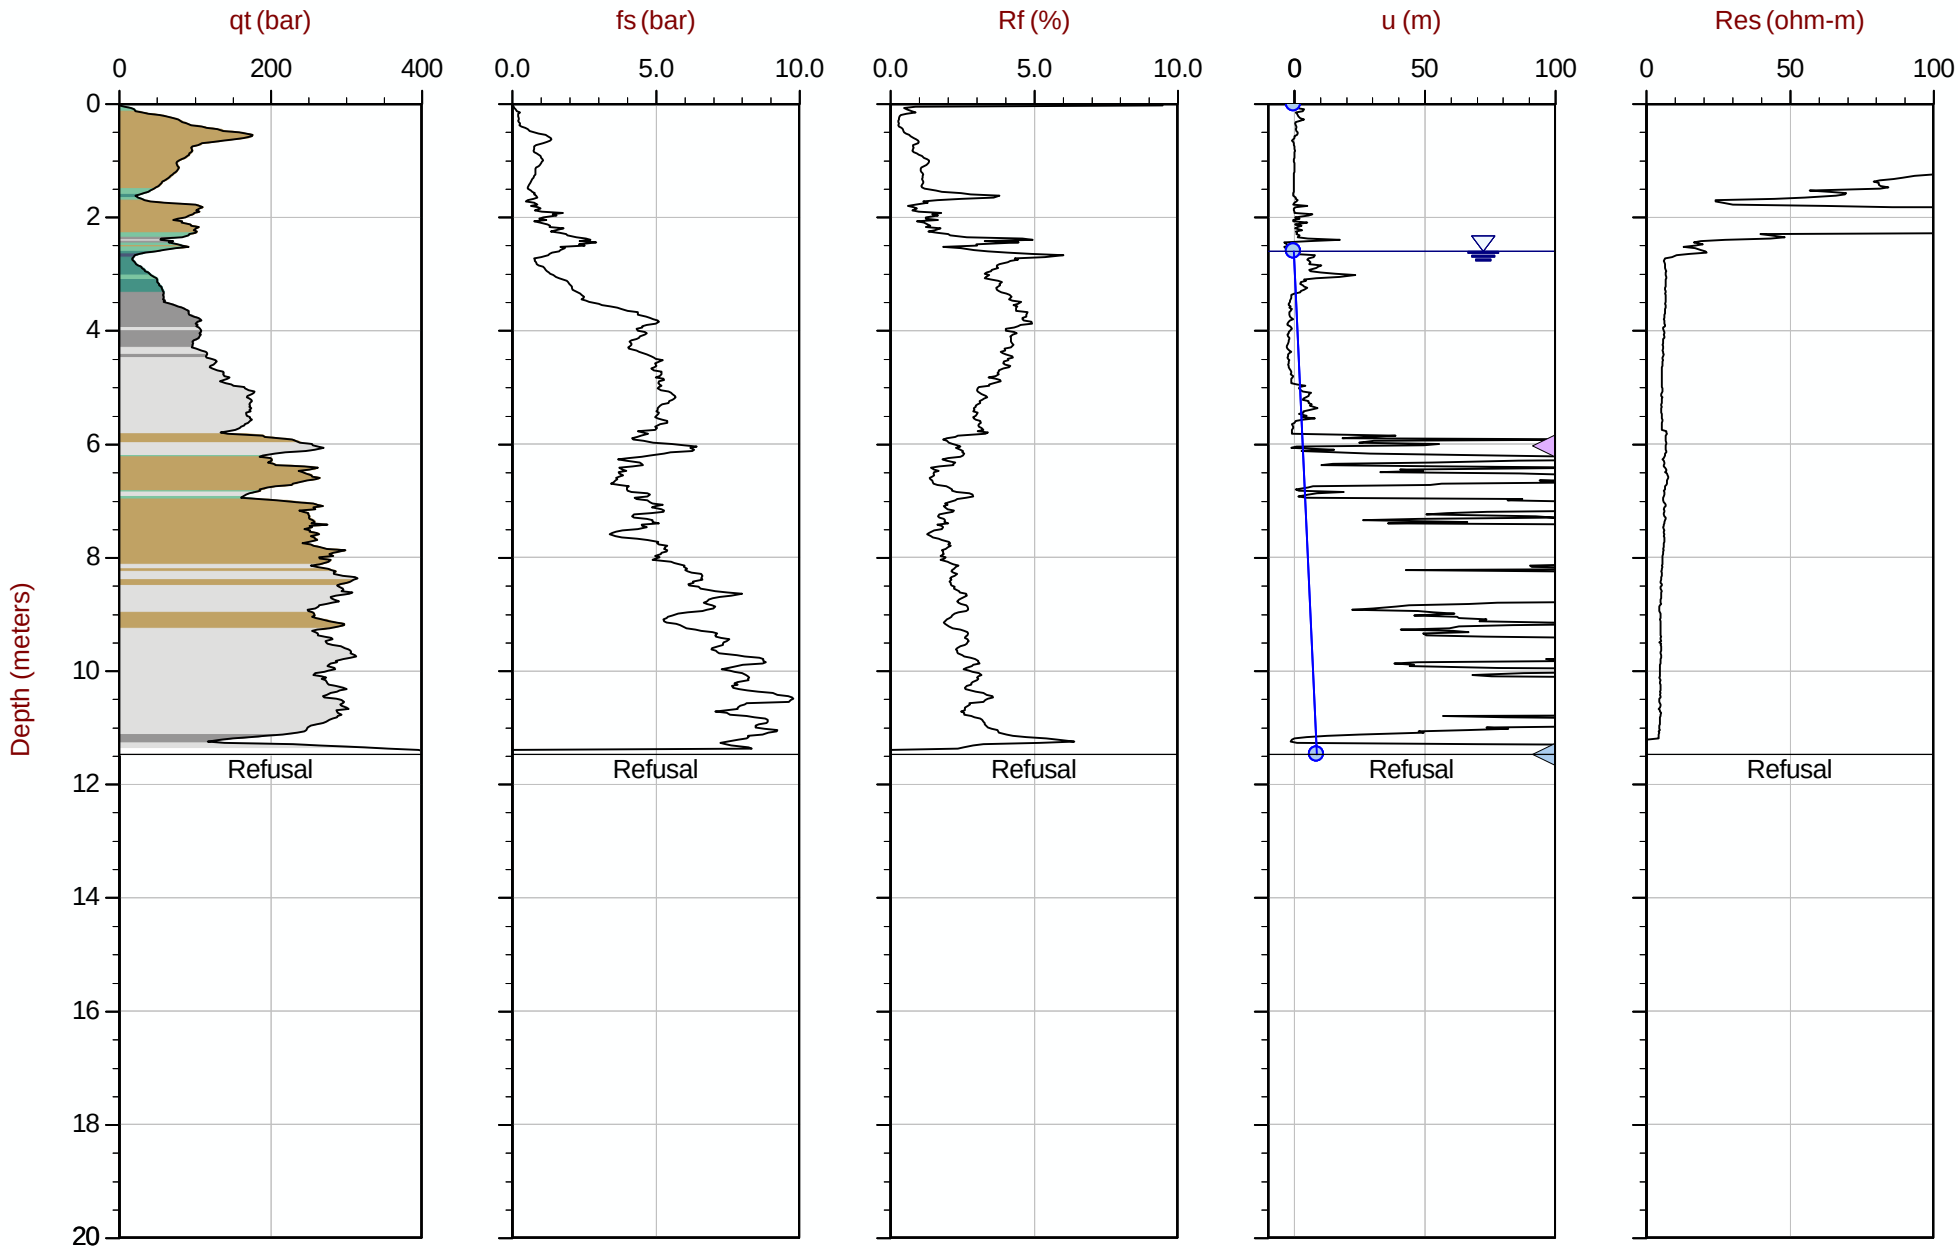

Max Depth: 11.475 m / 37.65 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT219.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611557m E: 416870m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 15:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT220
Cone: 854:T1500F15U35 Area= 15cm2

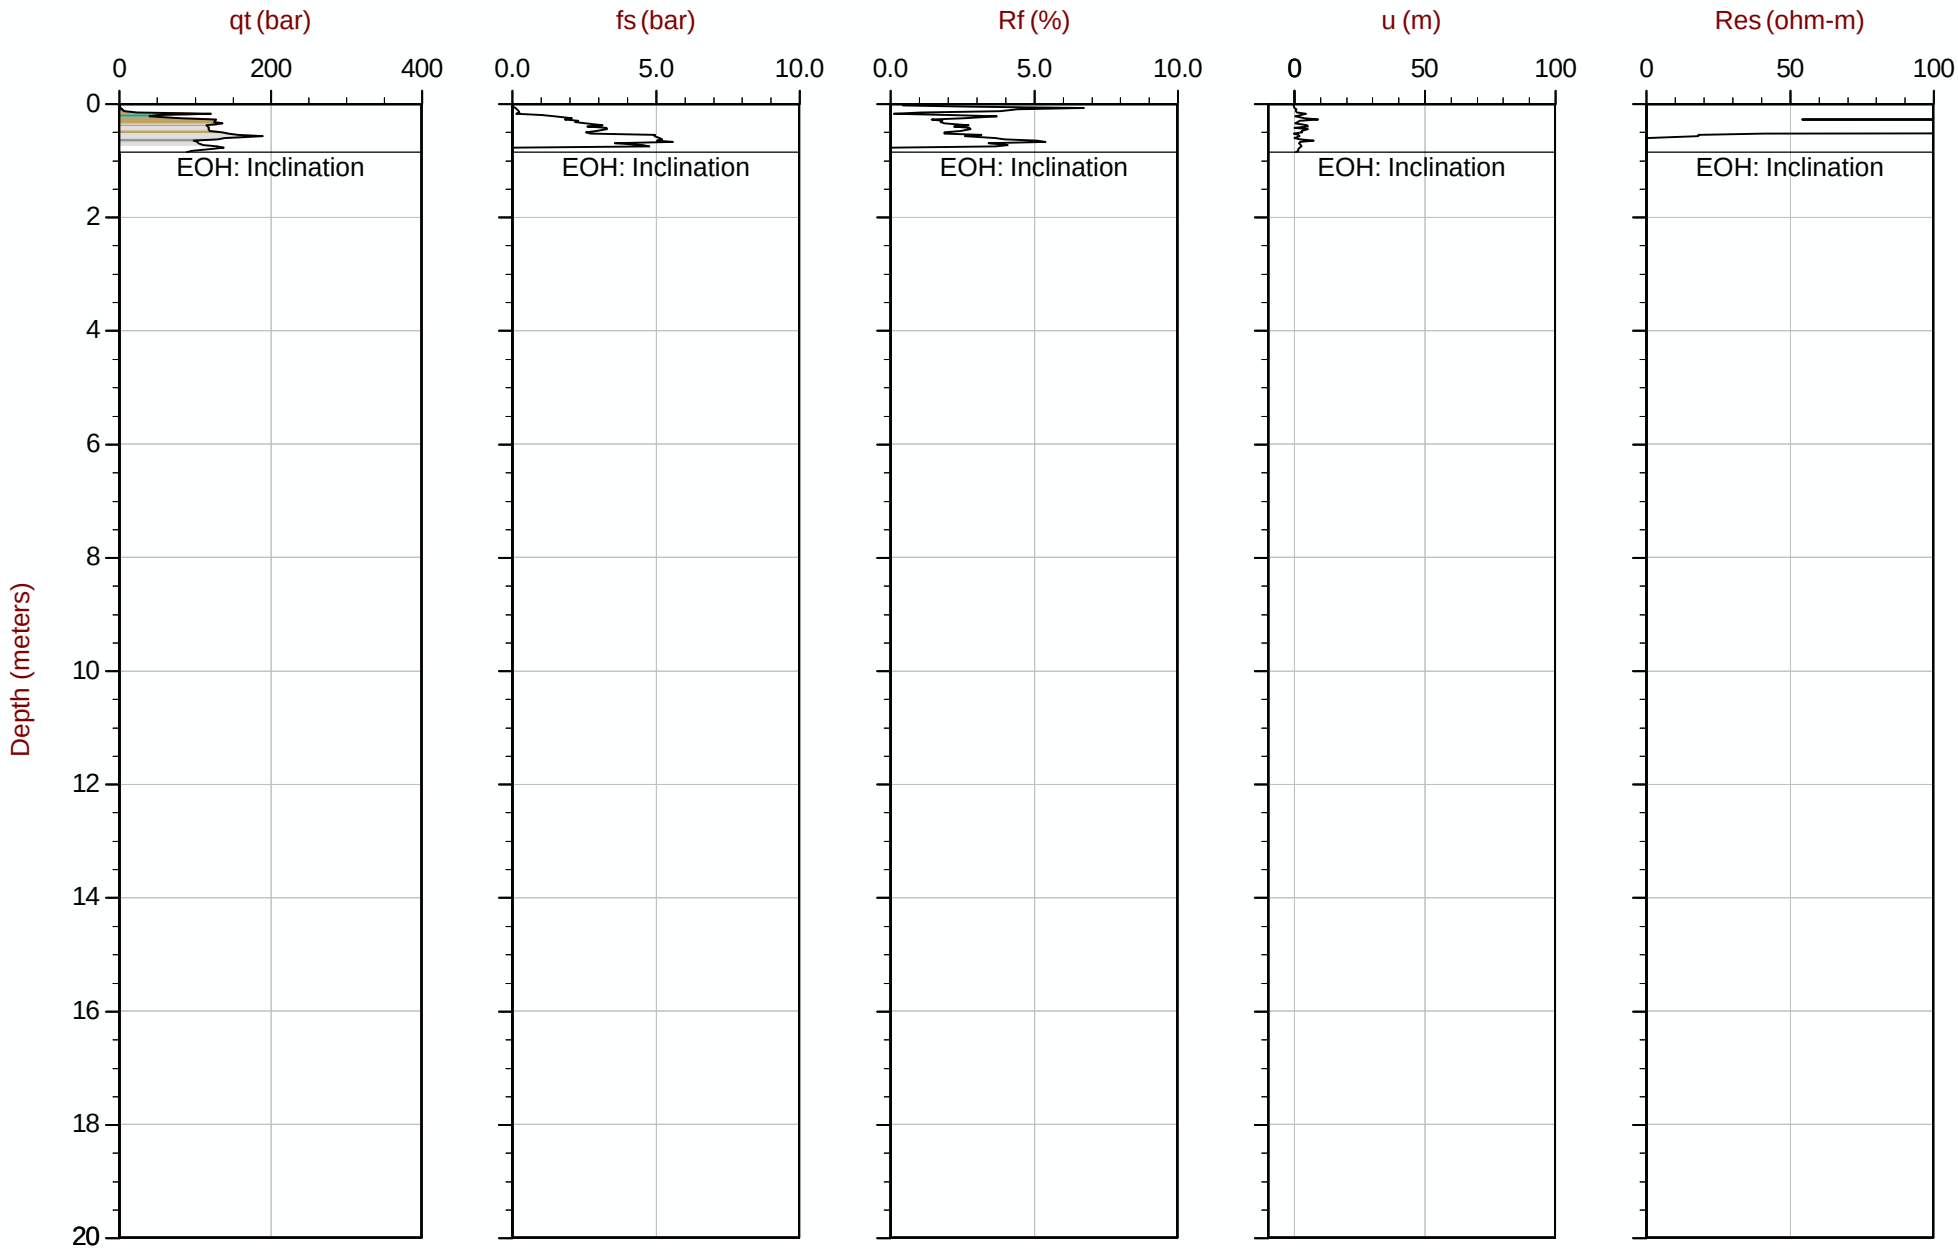

Max Depth: 0.850 m / 2.79 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT220.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611508m E: 416869m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 16:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT220B
Cone: 854:T1500F15U35 Area= 15cm2

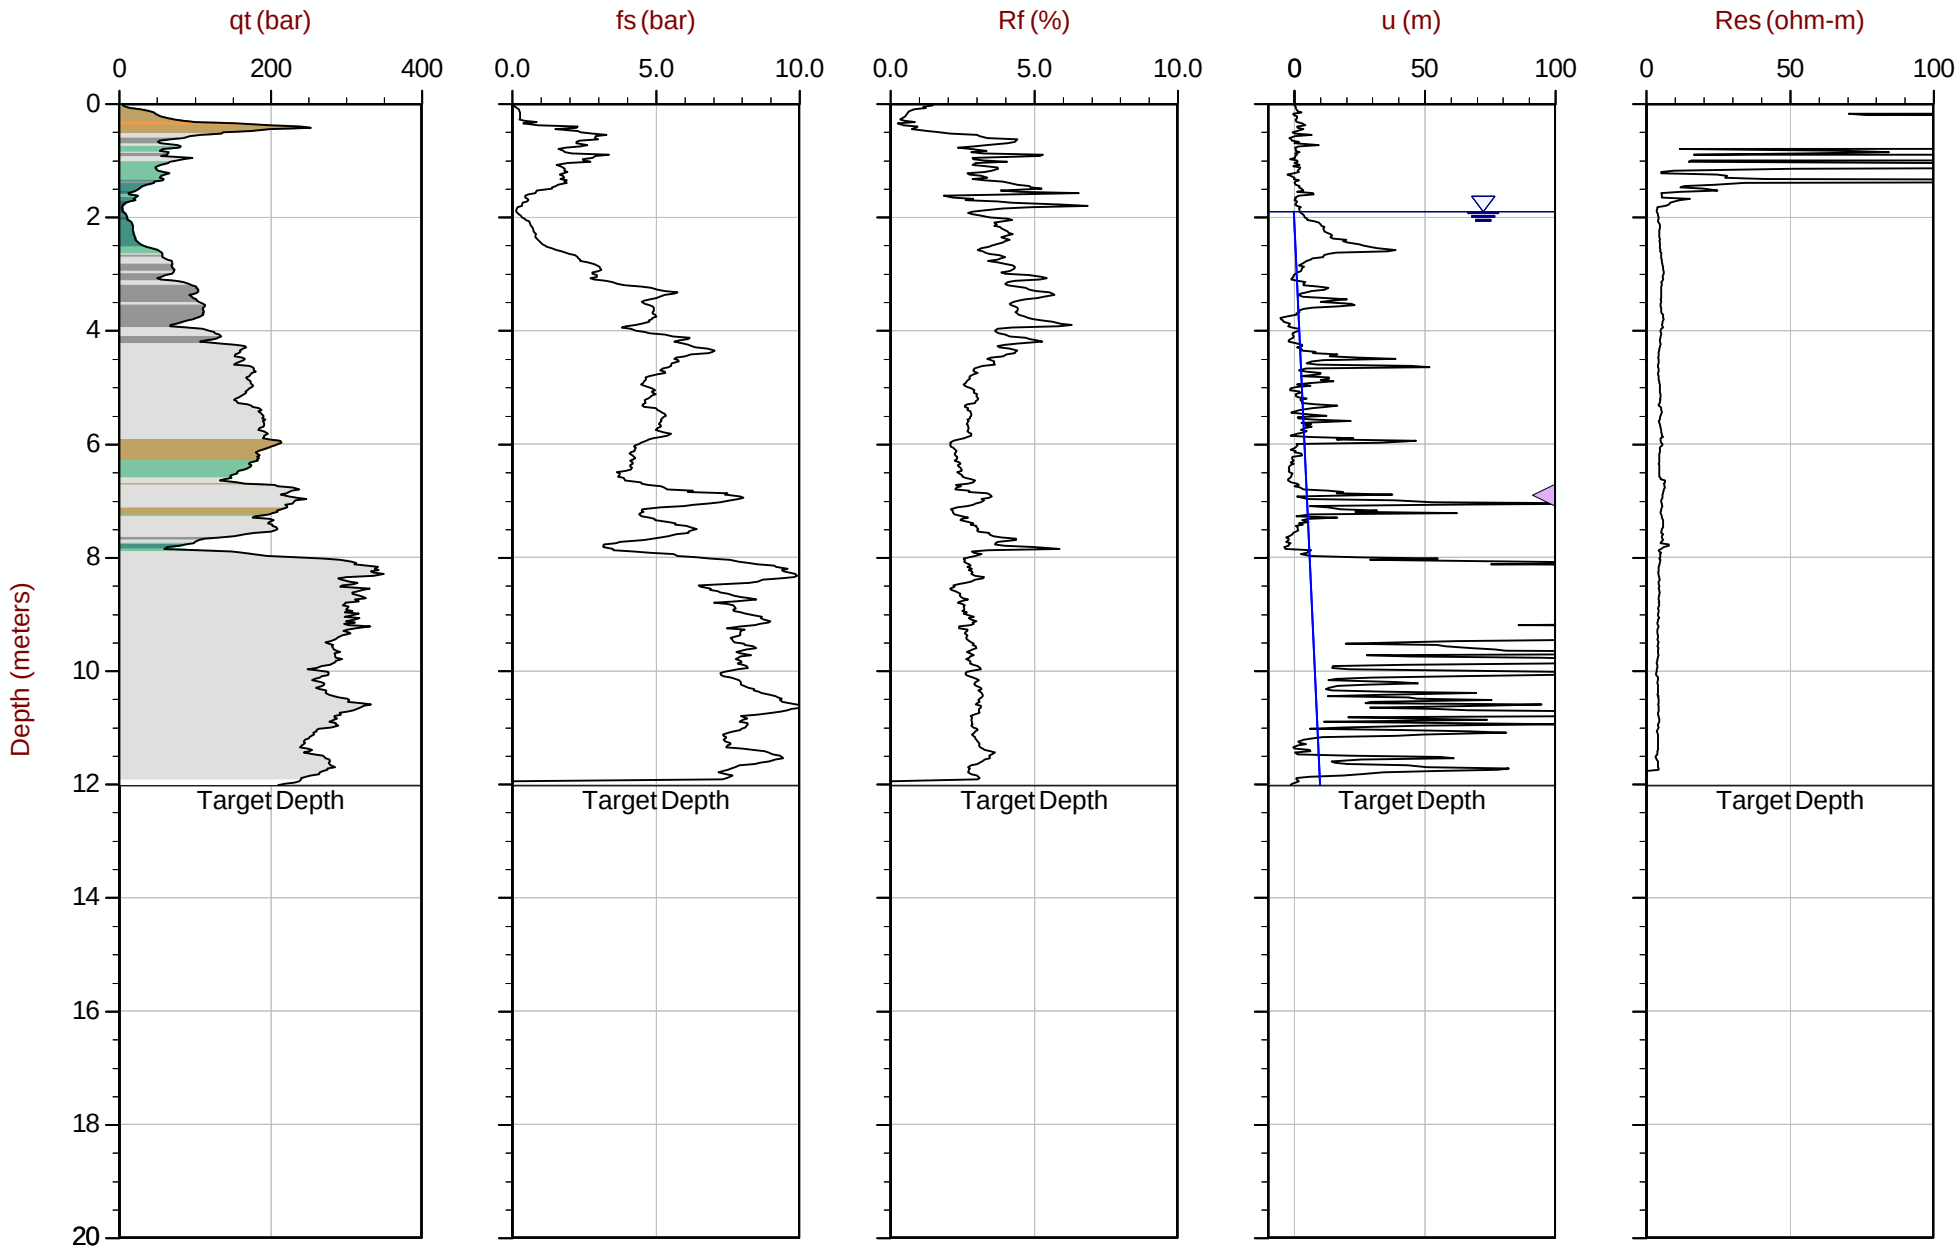

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT220B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611509m E: 416869m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 17:44
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT221
Cone: 854:T1500F15U35 Area= 15cm2

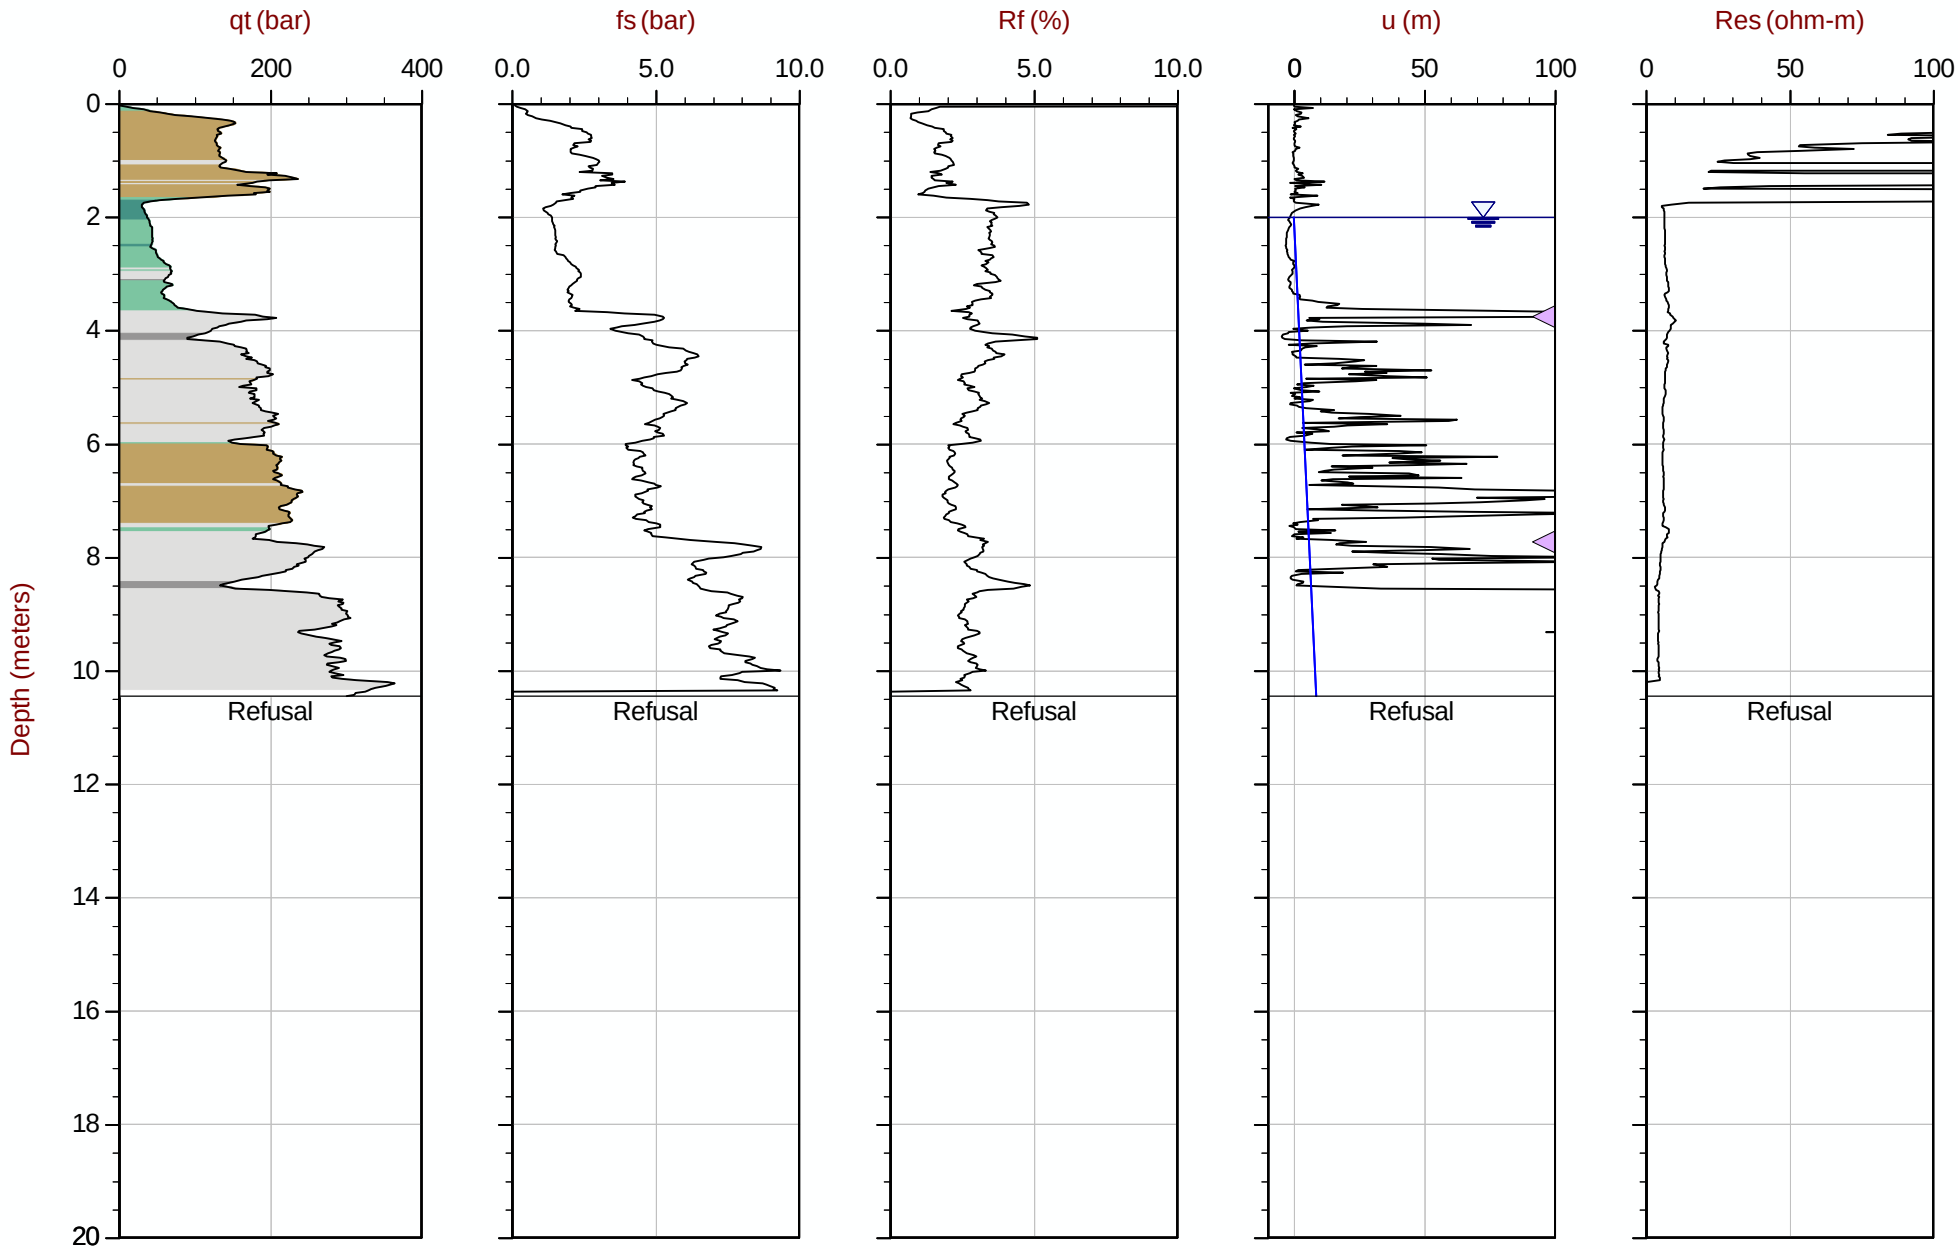

Max Depth: 10.450 m / 34.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT221.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611457m E: 416868m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 06:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT222
Cone: 854:T1500F15U35 Area= 15cm2

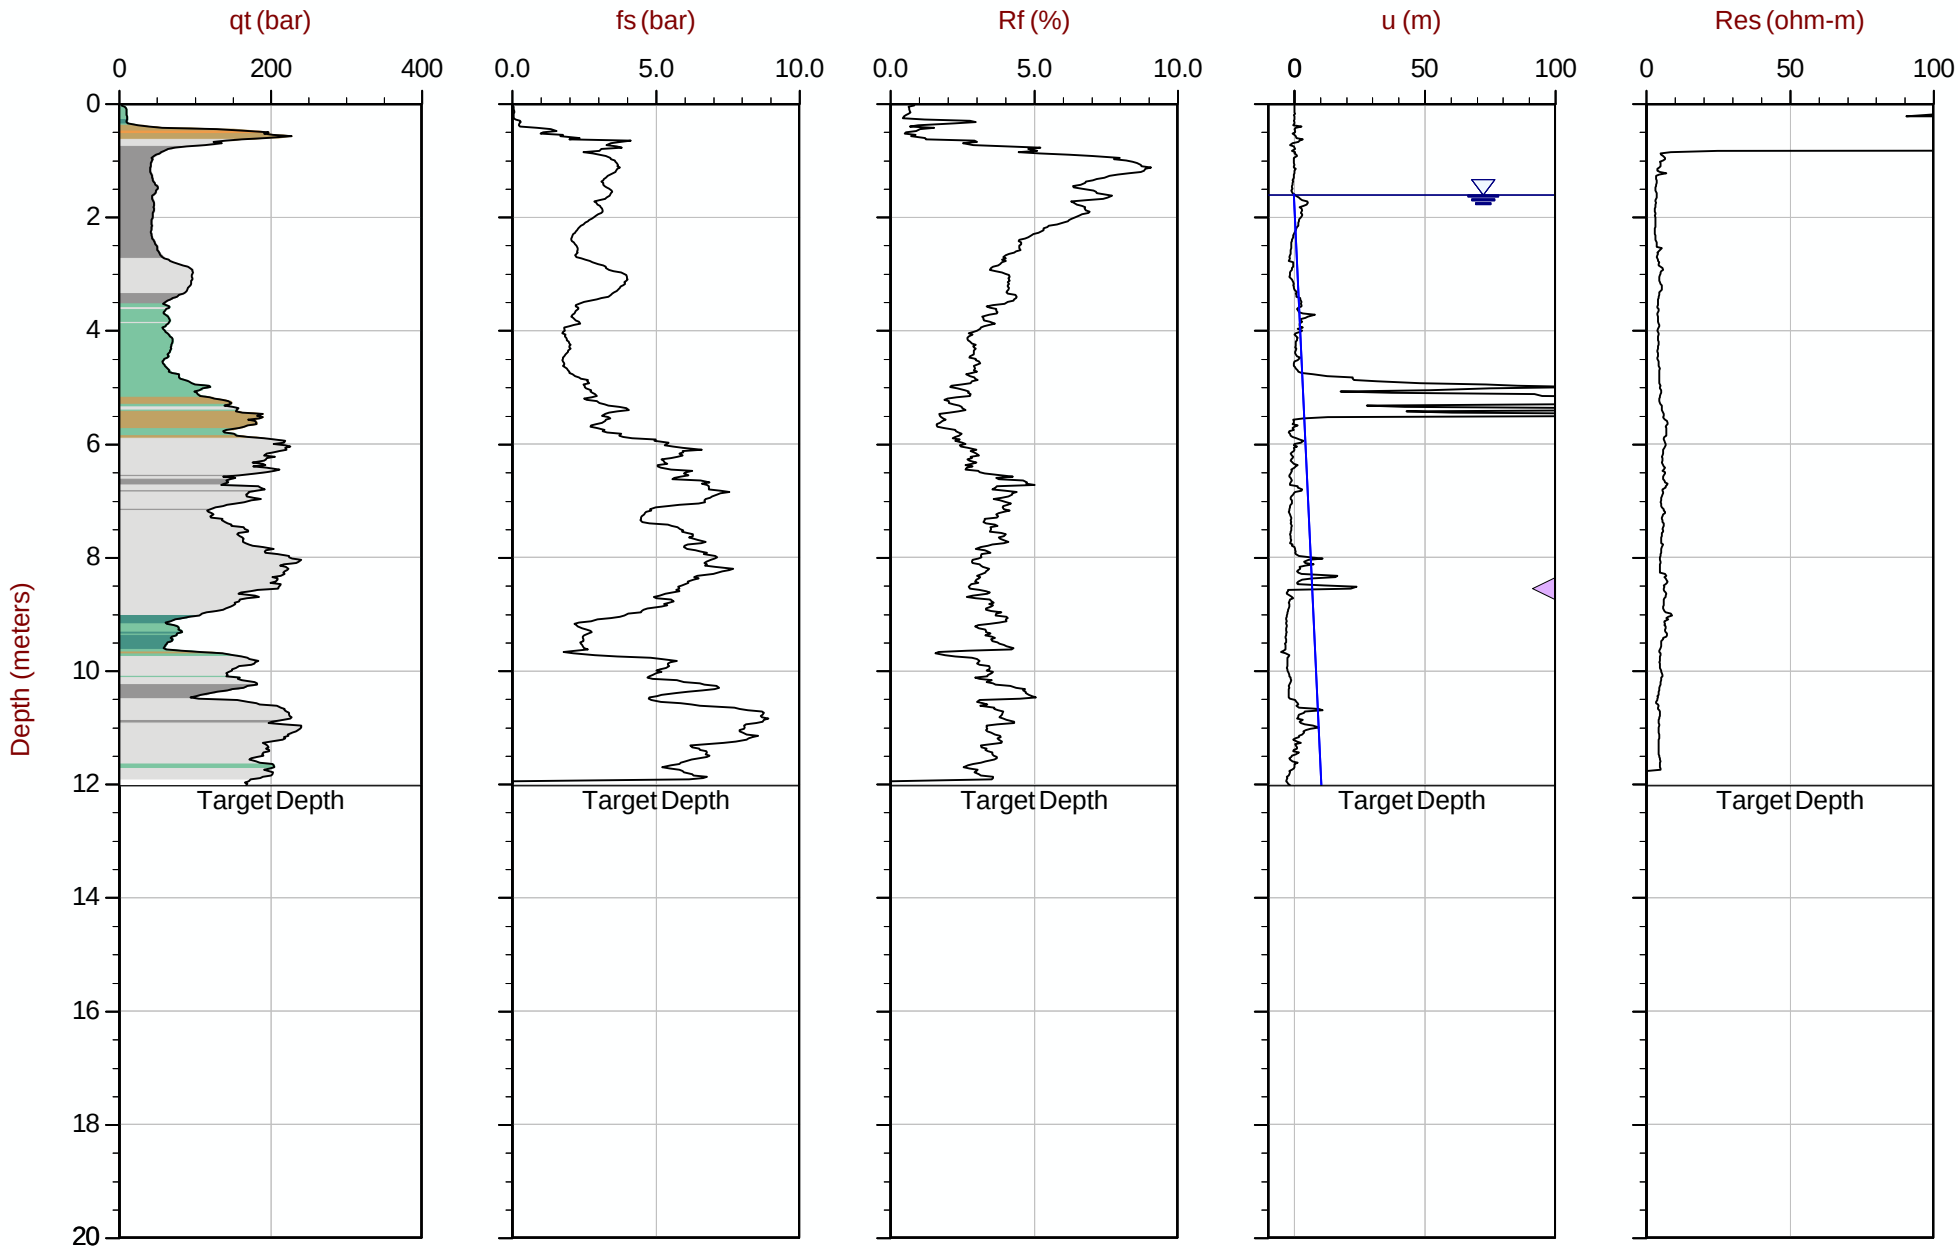

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT222.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611408m E: 416867m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 07:33
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT223
Cone: 854:T1500F15U35 Area= 15cm2

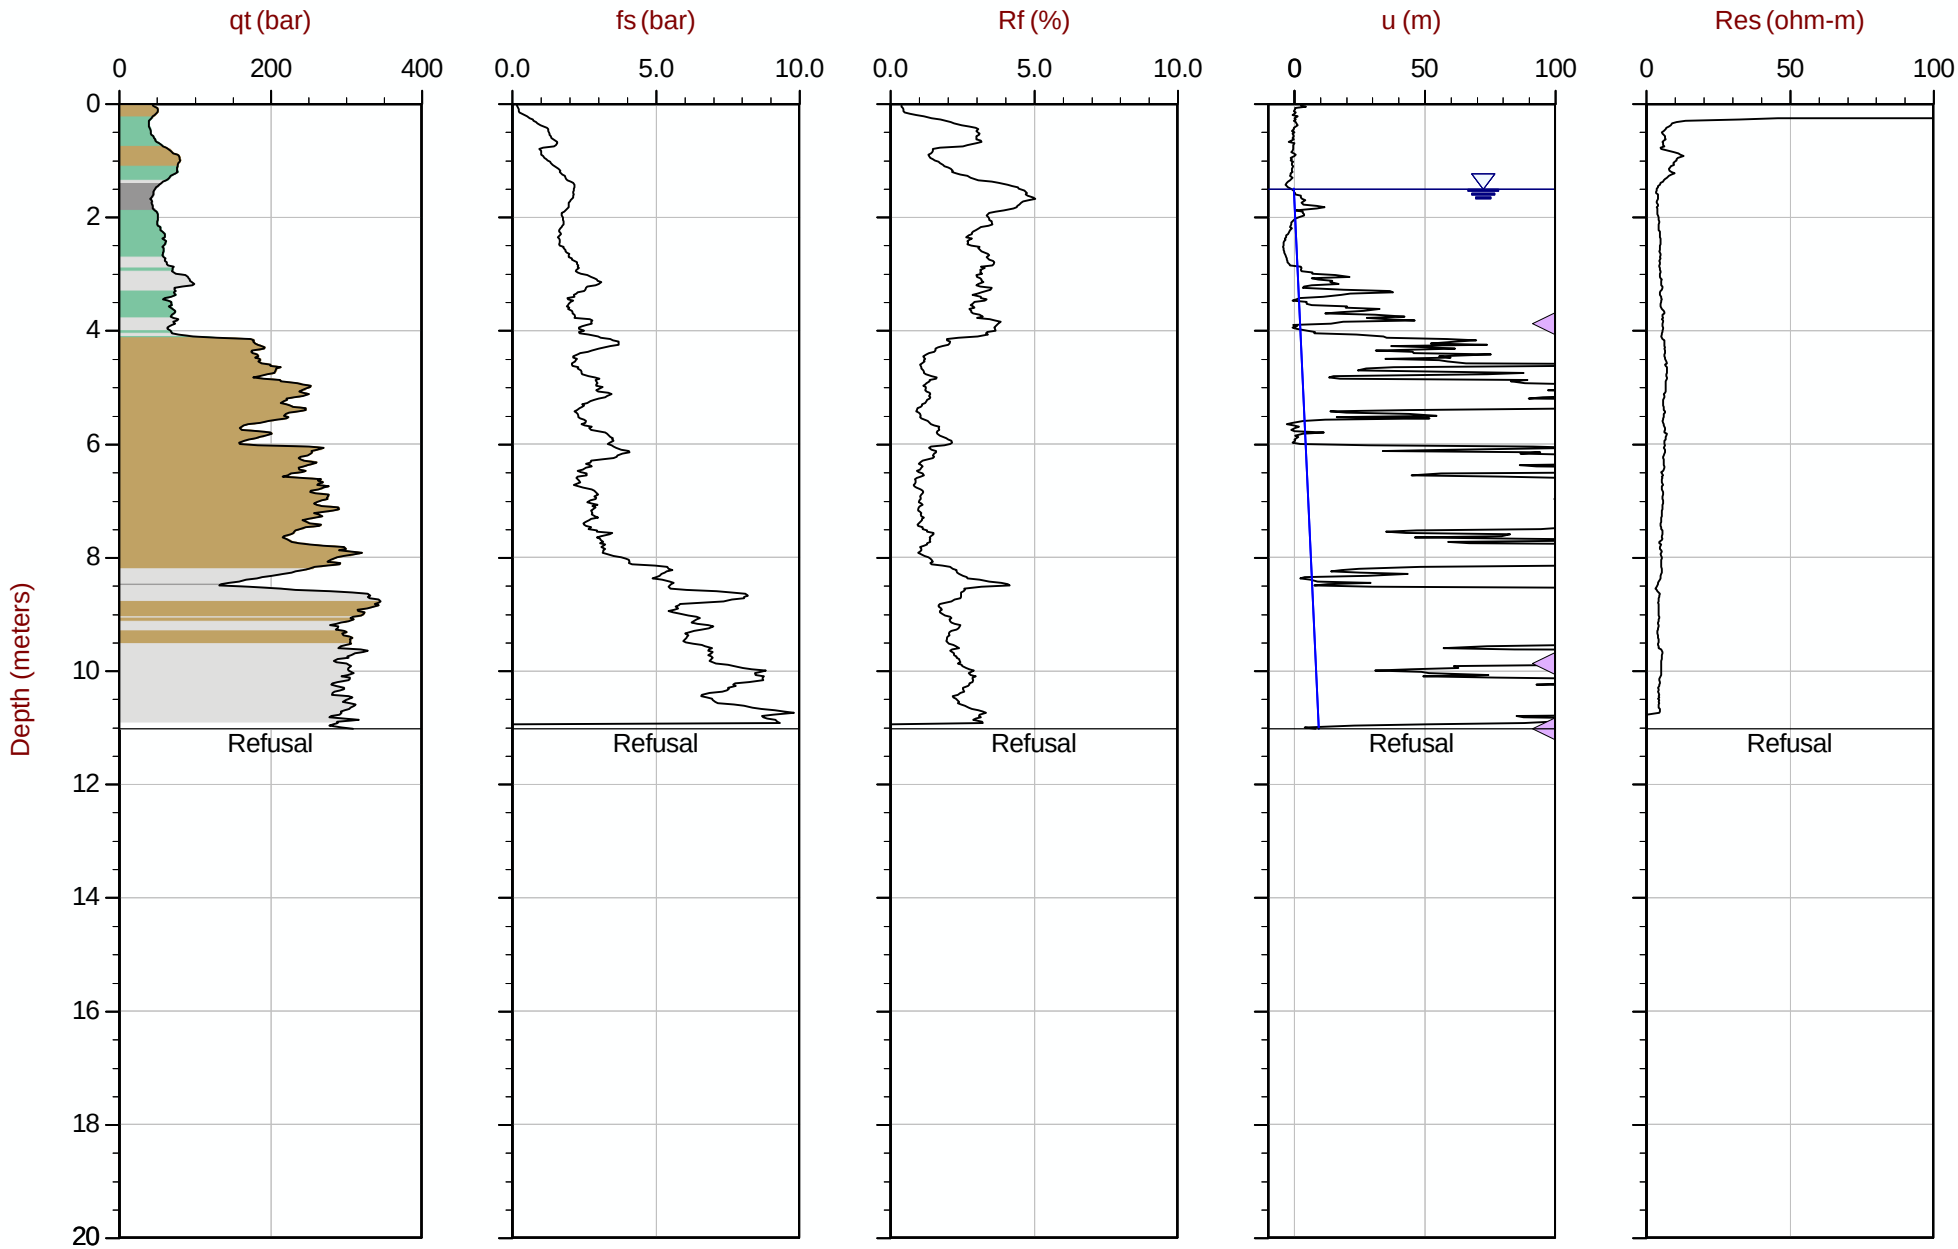

Max Depth: 11.025 m / 36.17 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT223.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611357m E: 416865m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 09:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT224
Cone: 854:T1500F15U35 Area= 15cm2

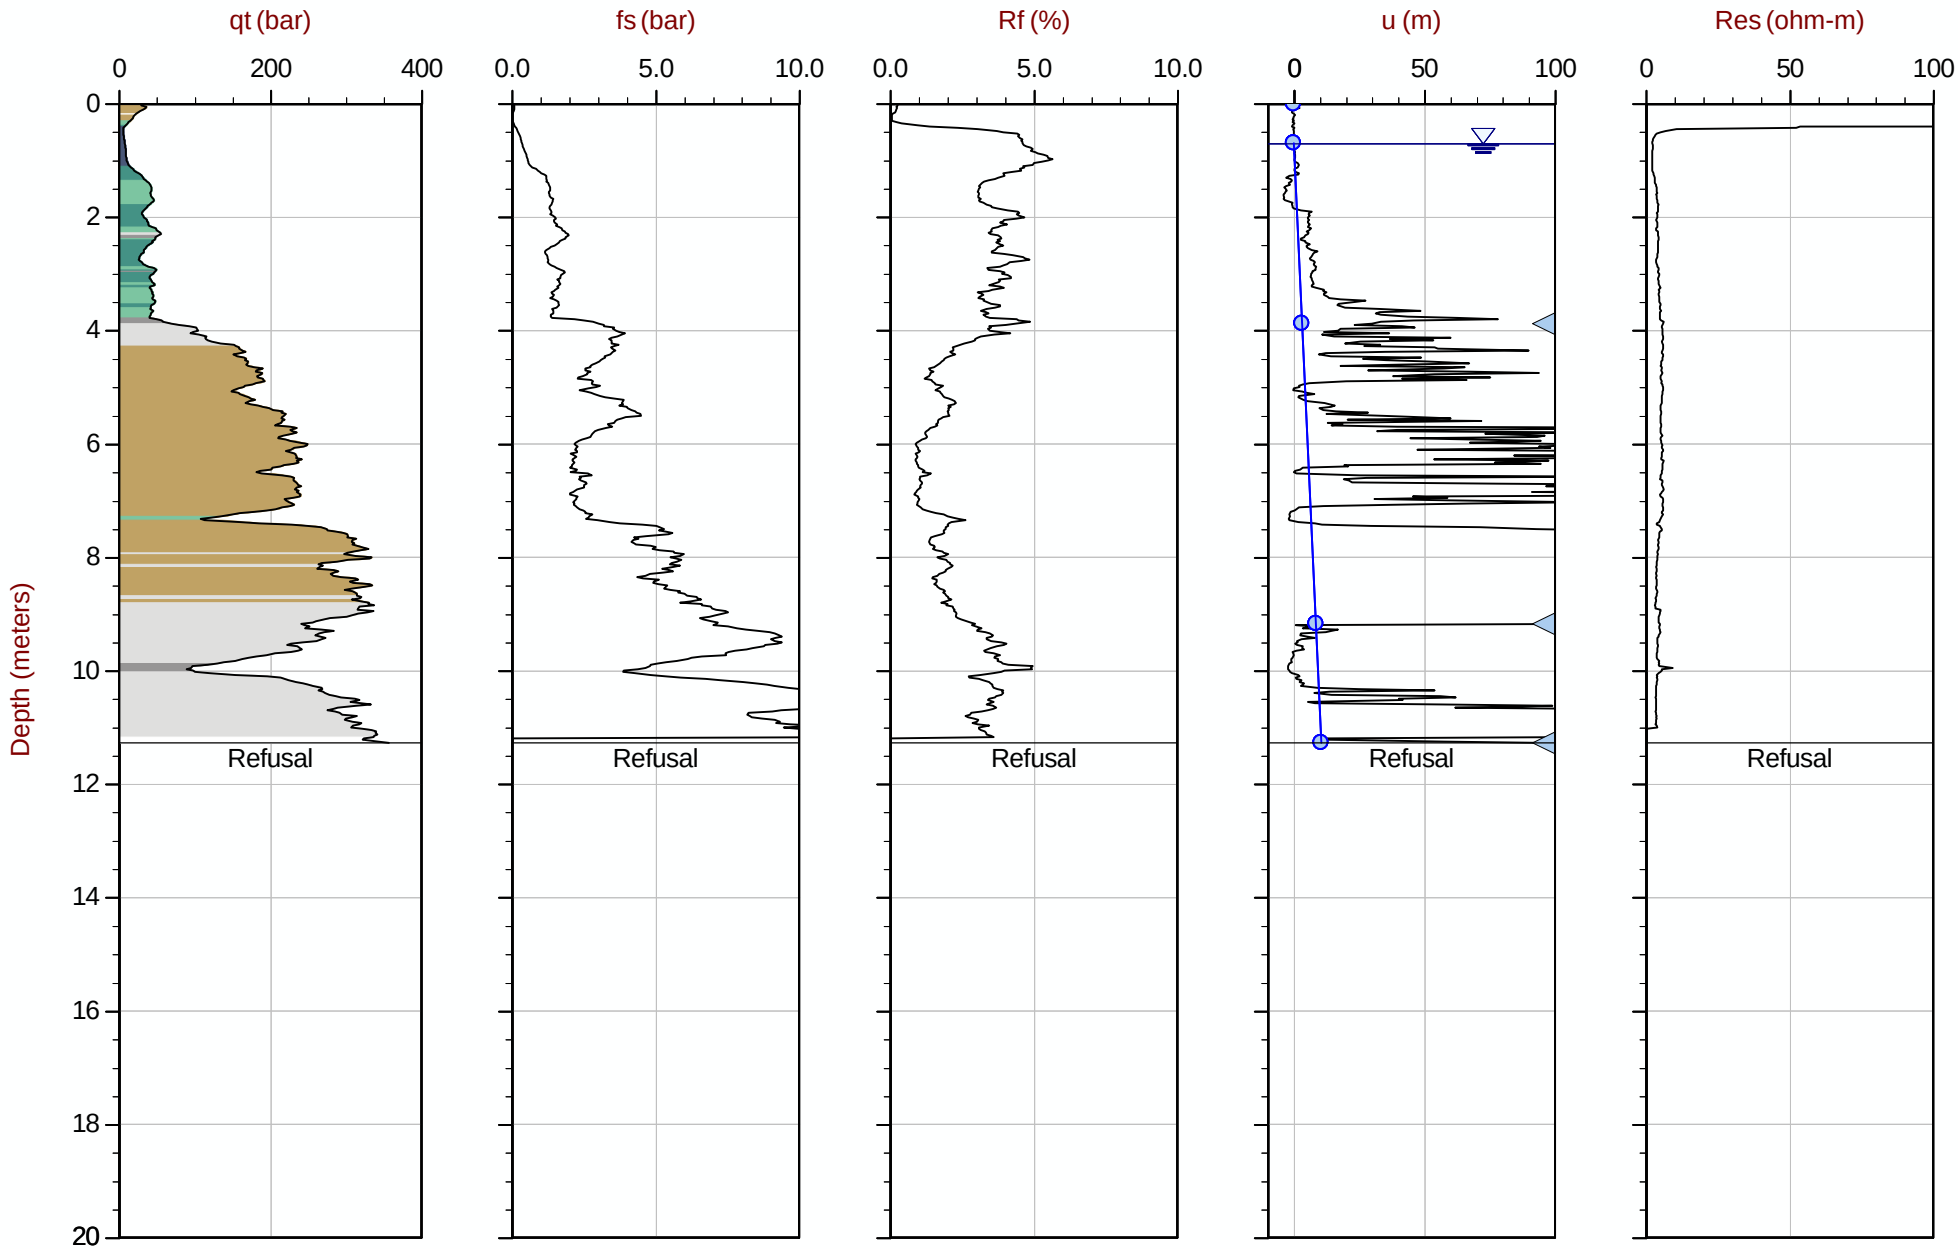

Max Depth: 11.275 m / 36.99 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT224.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611308m E: 416864m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 06:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT225
Cone: 821:T1000F10U35 Area= 15cm2

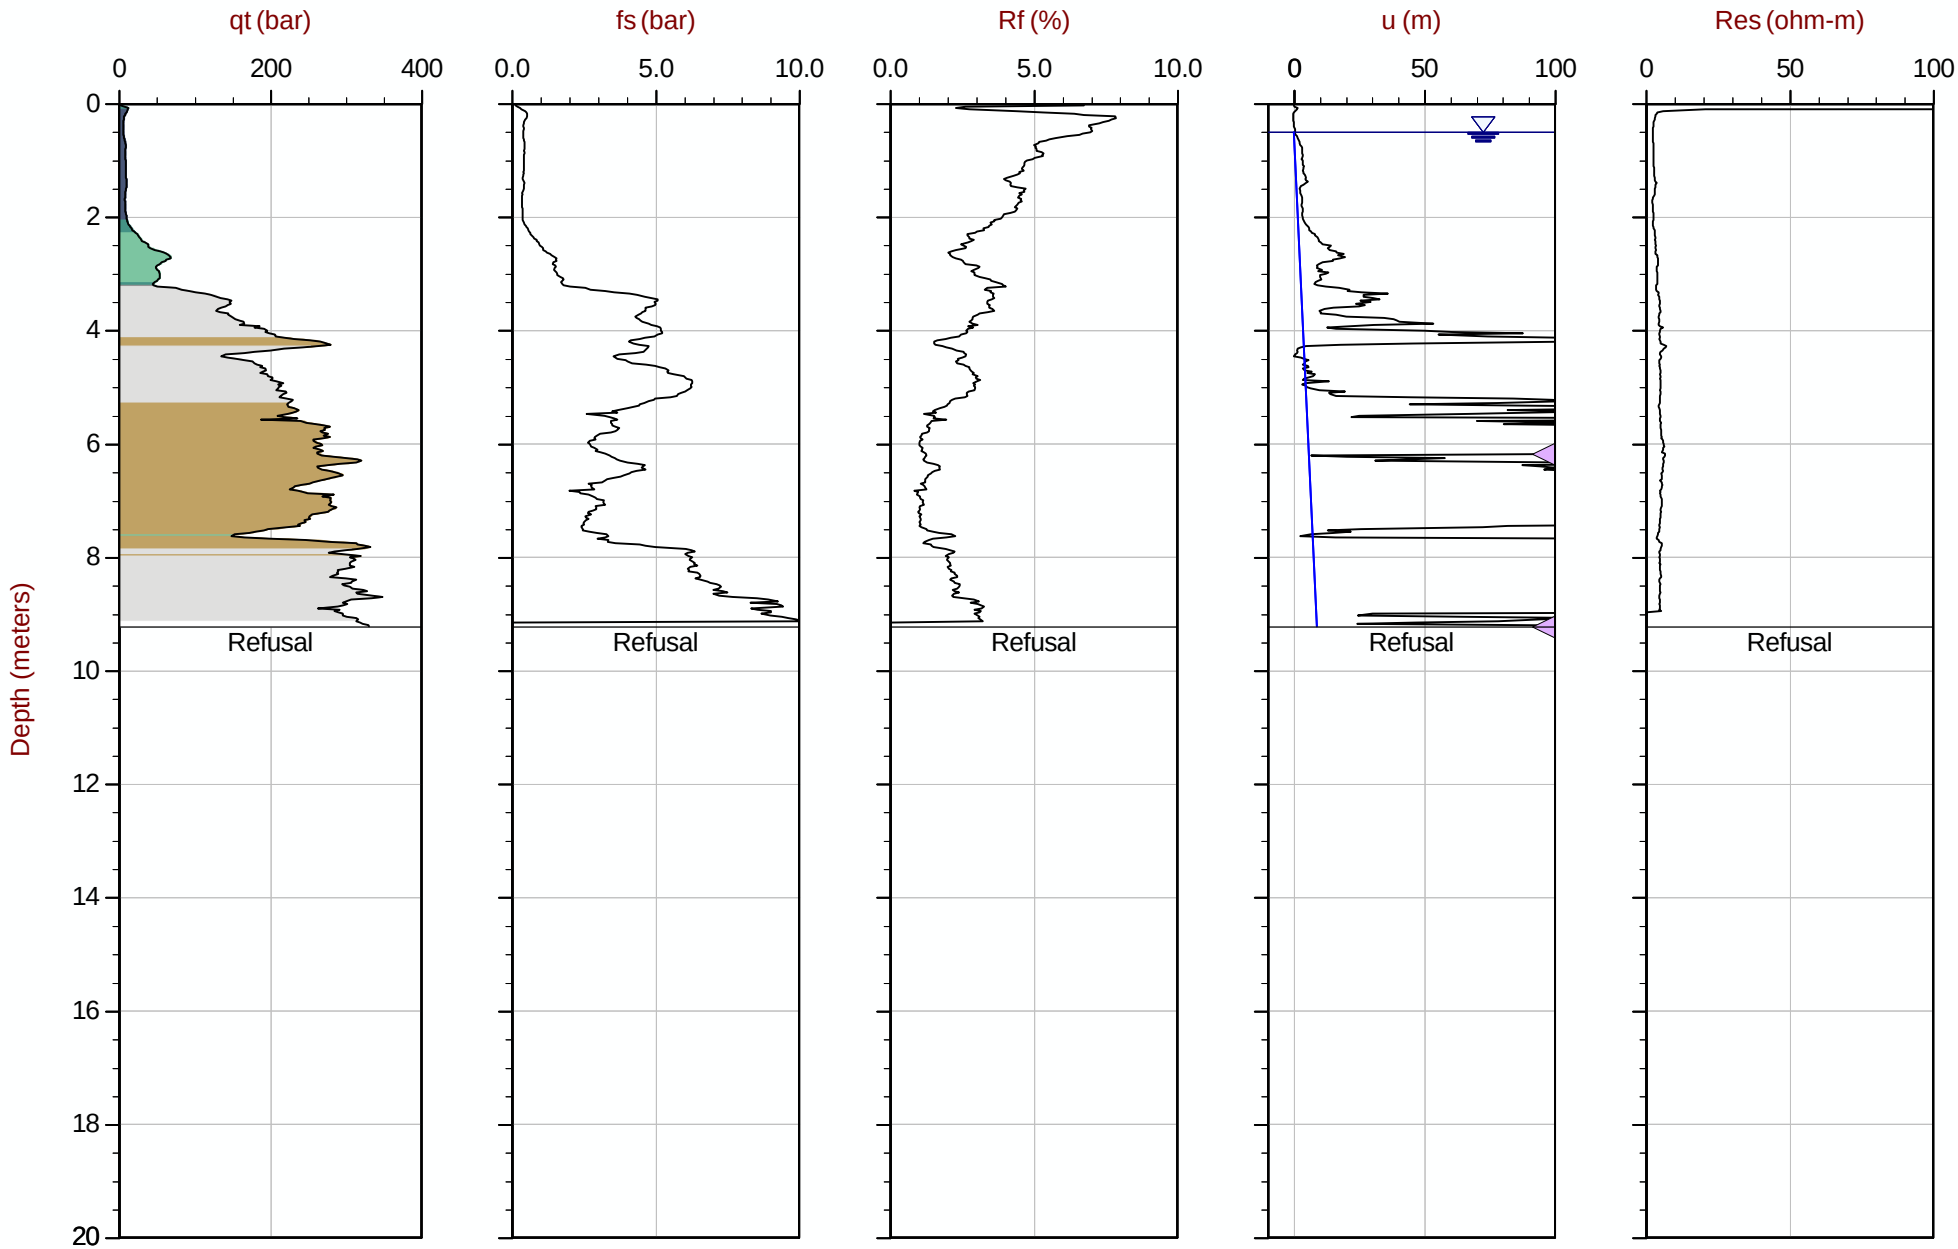

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT225.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611257m E: 416863m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 11:08
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT226
Cone: 854:T1500F15U35 Area= 15cm2

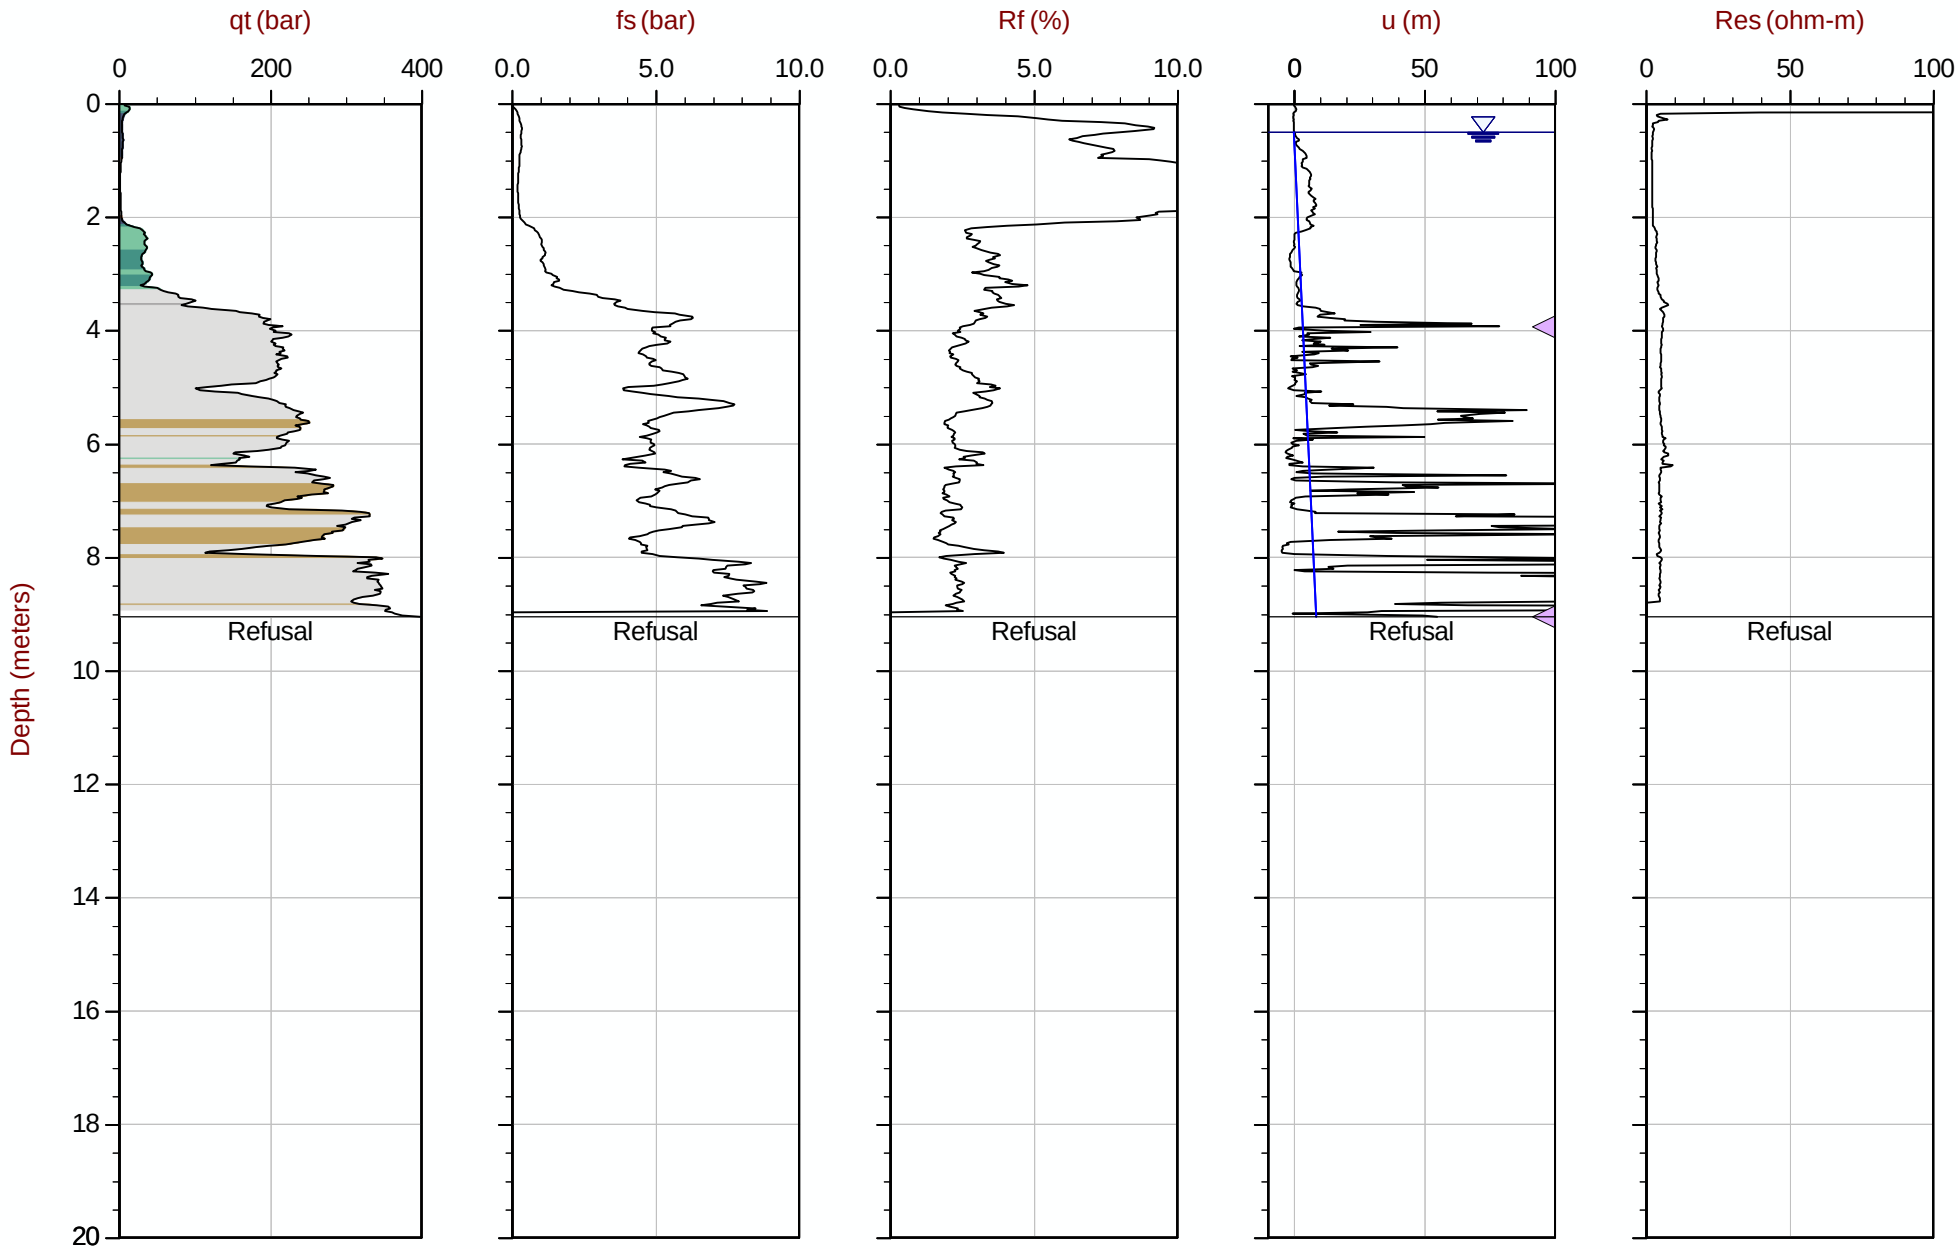

Max Depth: 9.050 m / 29.69 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT226.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611208m E: 416862m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 12:42
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT227
Cone: 854:T1500F15U35 Area= 15cm2

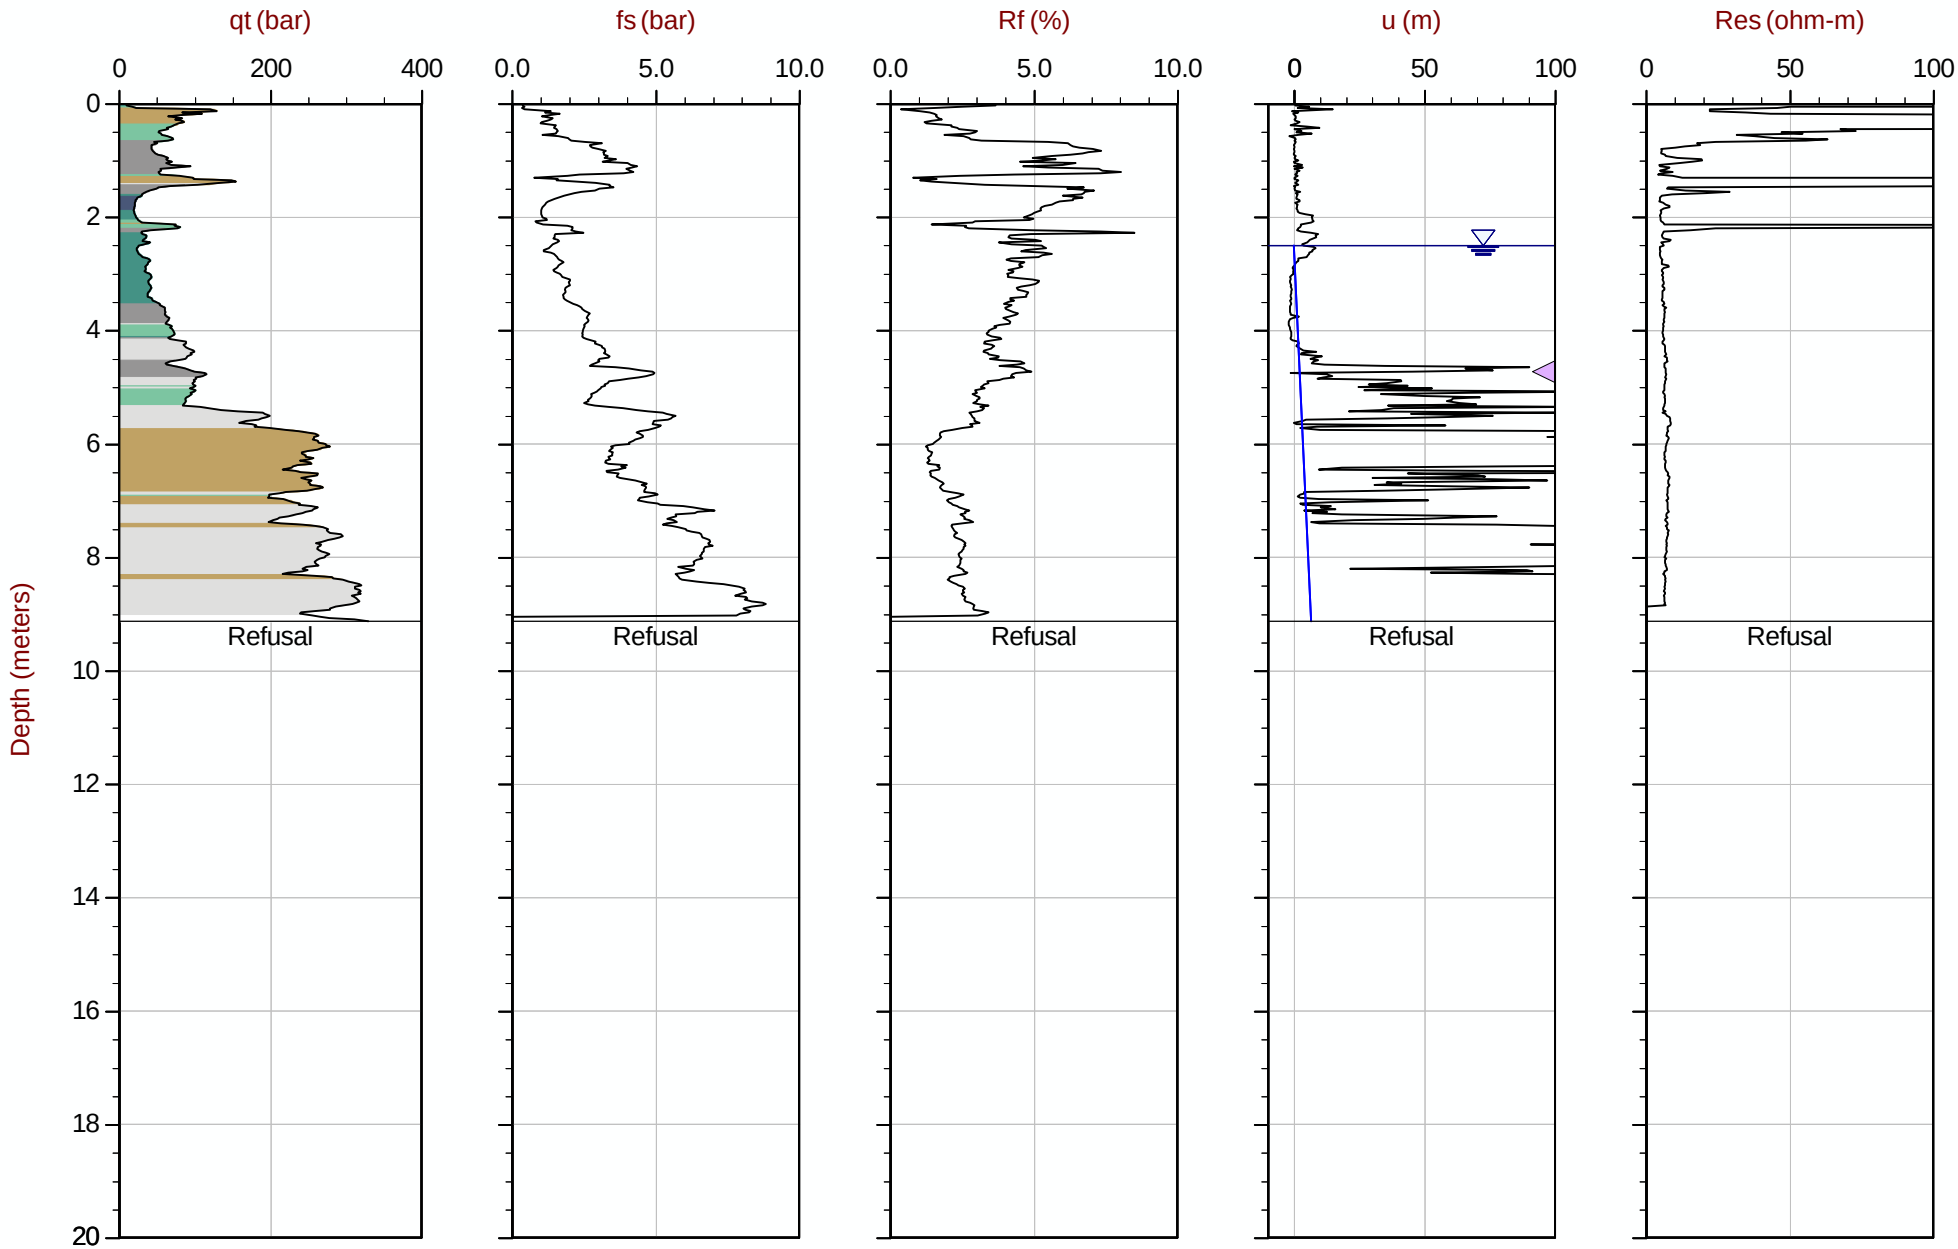

Max Depth: 9.125 m / 29.94 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT227.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611150m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 13:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228
Cone: 854:T1500F15U35 Area= 15cm2

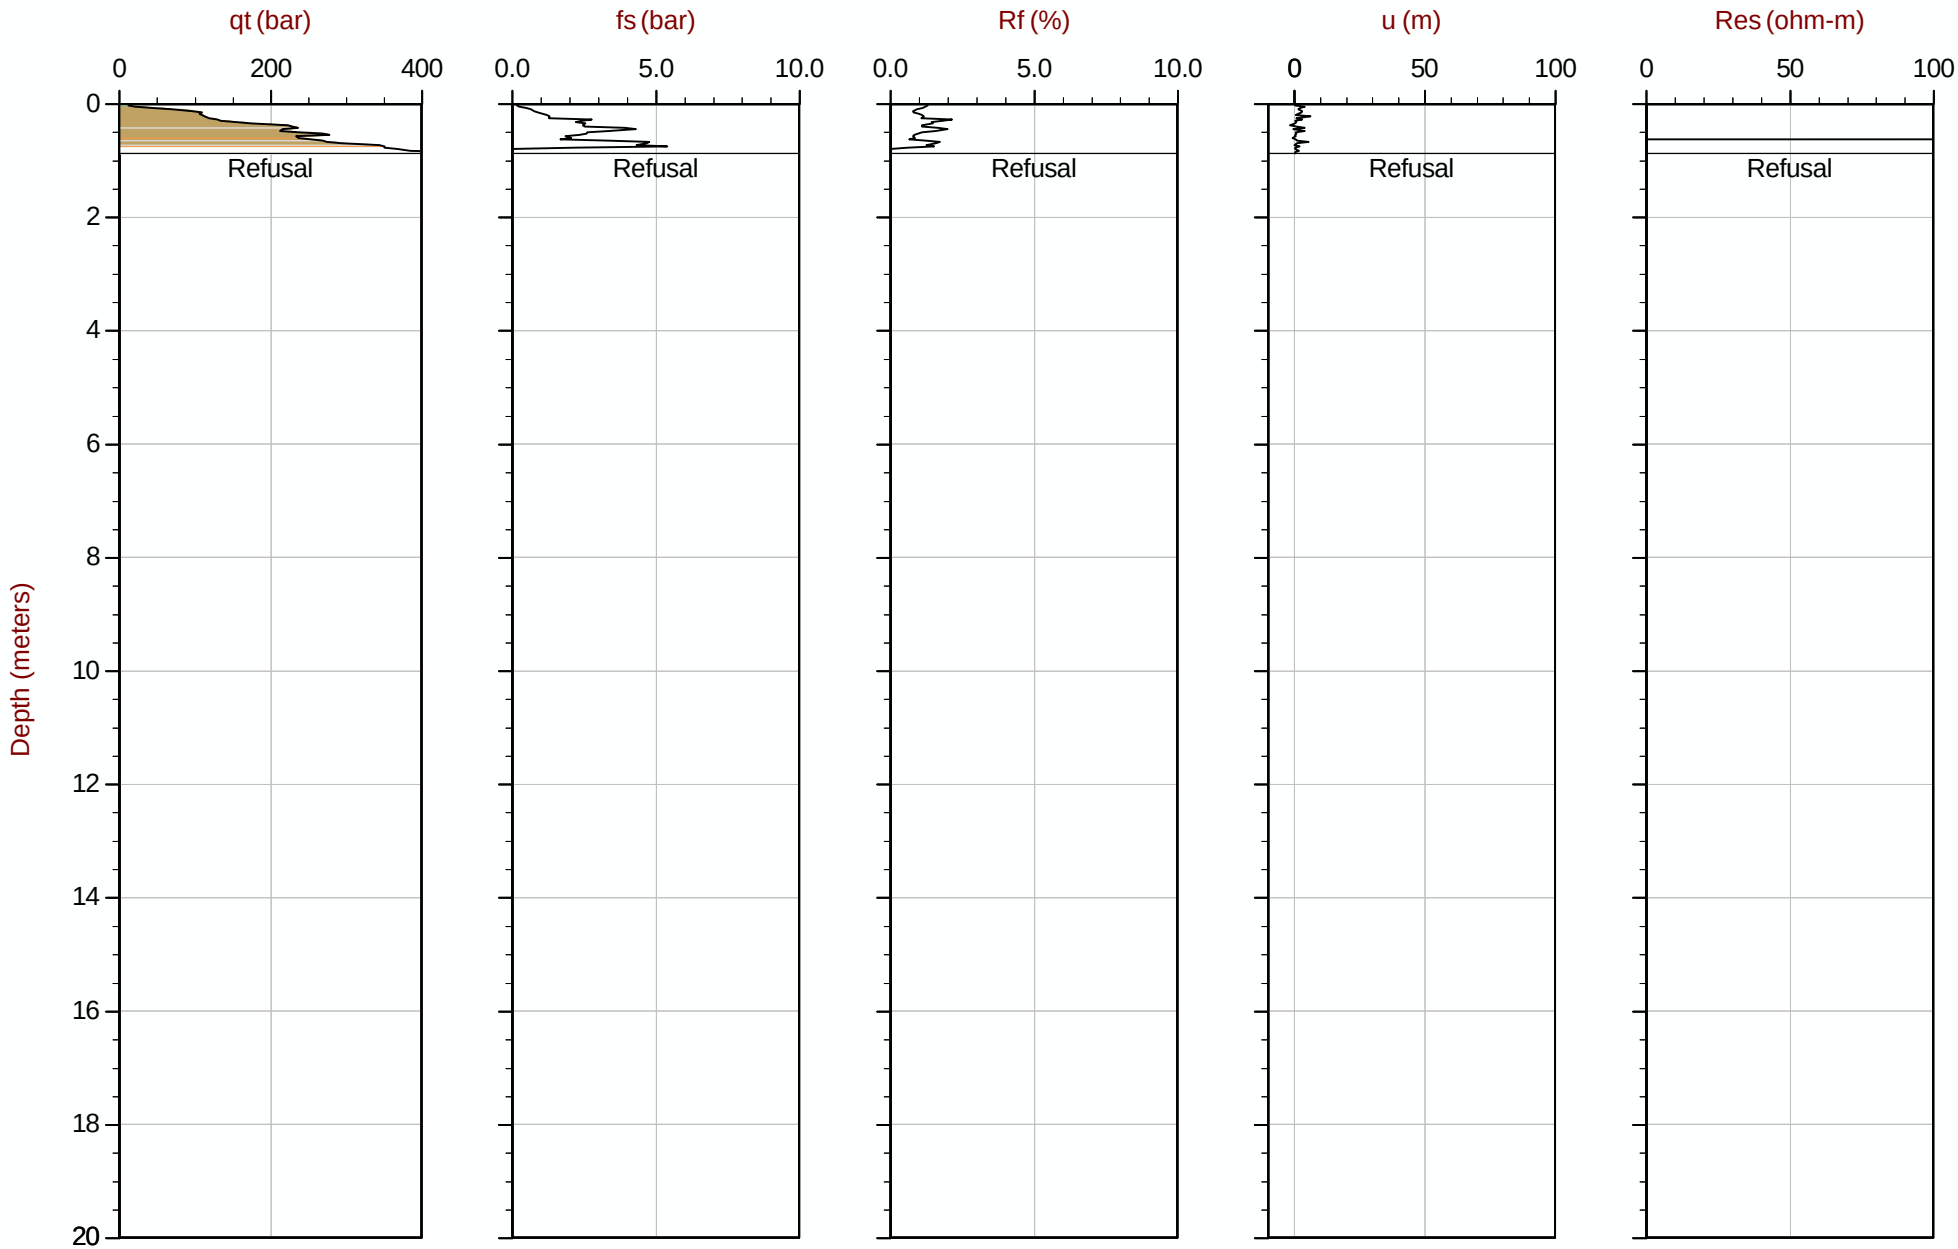

Max Depth: 0.875 m / 2.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT228.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611109m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 14:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228B
Cone: 854:T1500F15U35 Area= 15cm2

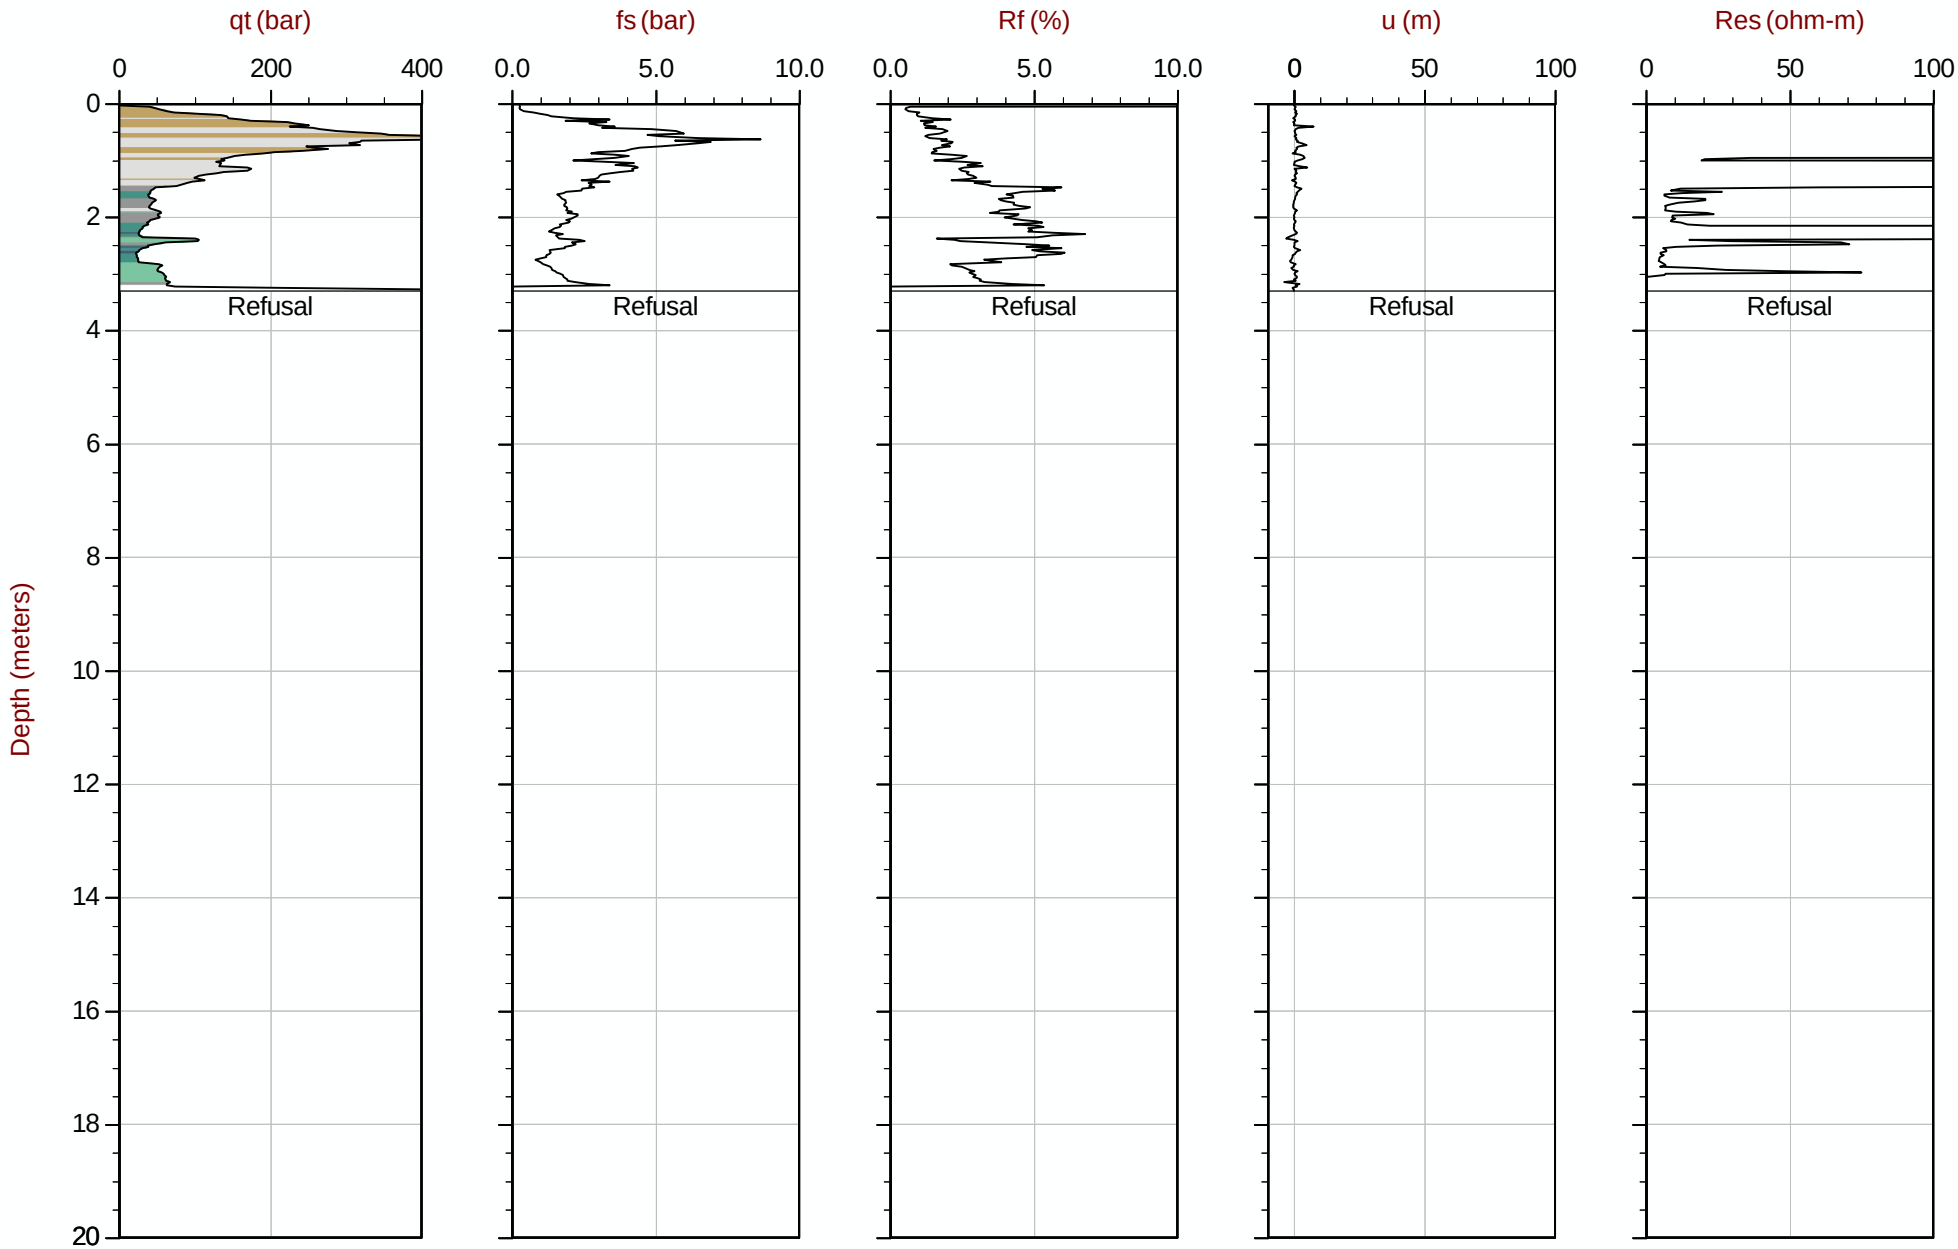

Max Depth: 3.300 m / 10.83 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT228B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611107m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 14:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228C
Cone: 854:T1500F15U35 Area= 15cm2

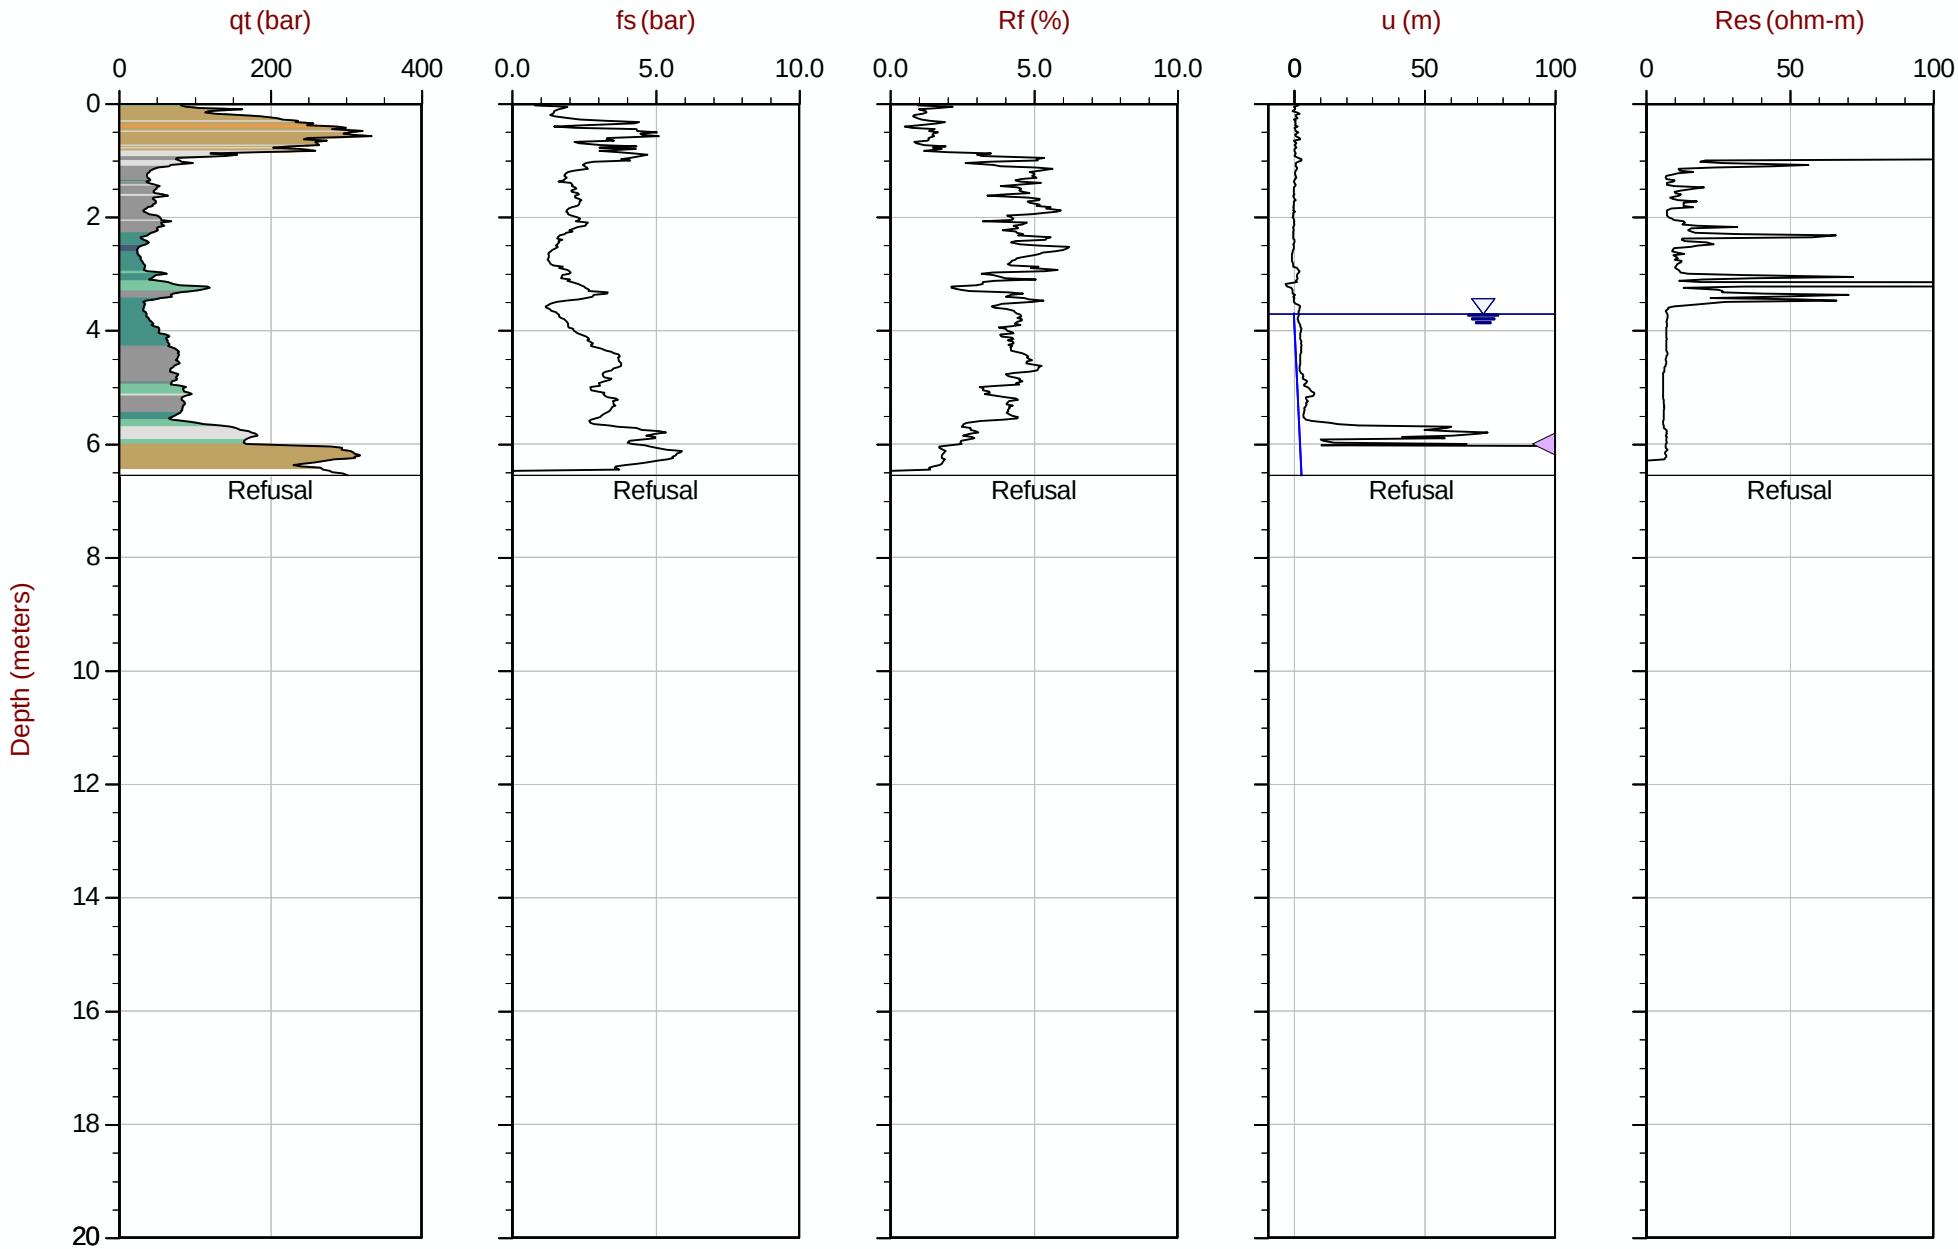

Max Depth: 6.550 m / 21.49 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT228C.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611105m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 15:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT229
Cone: 854:T1500F15U35 Area= 15cm2

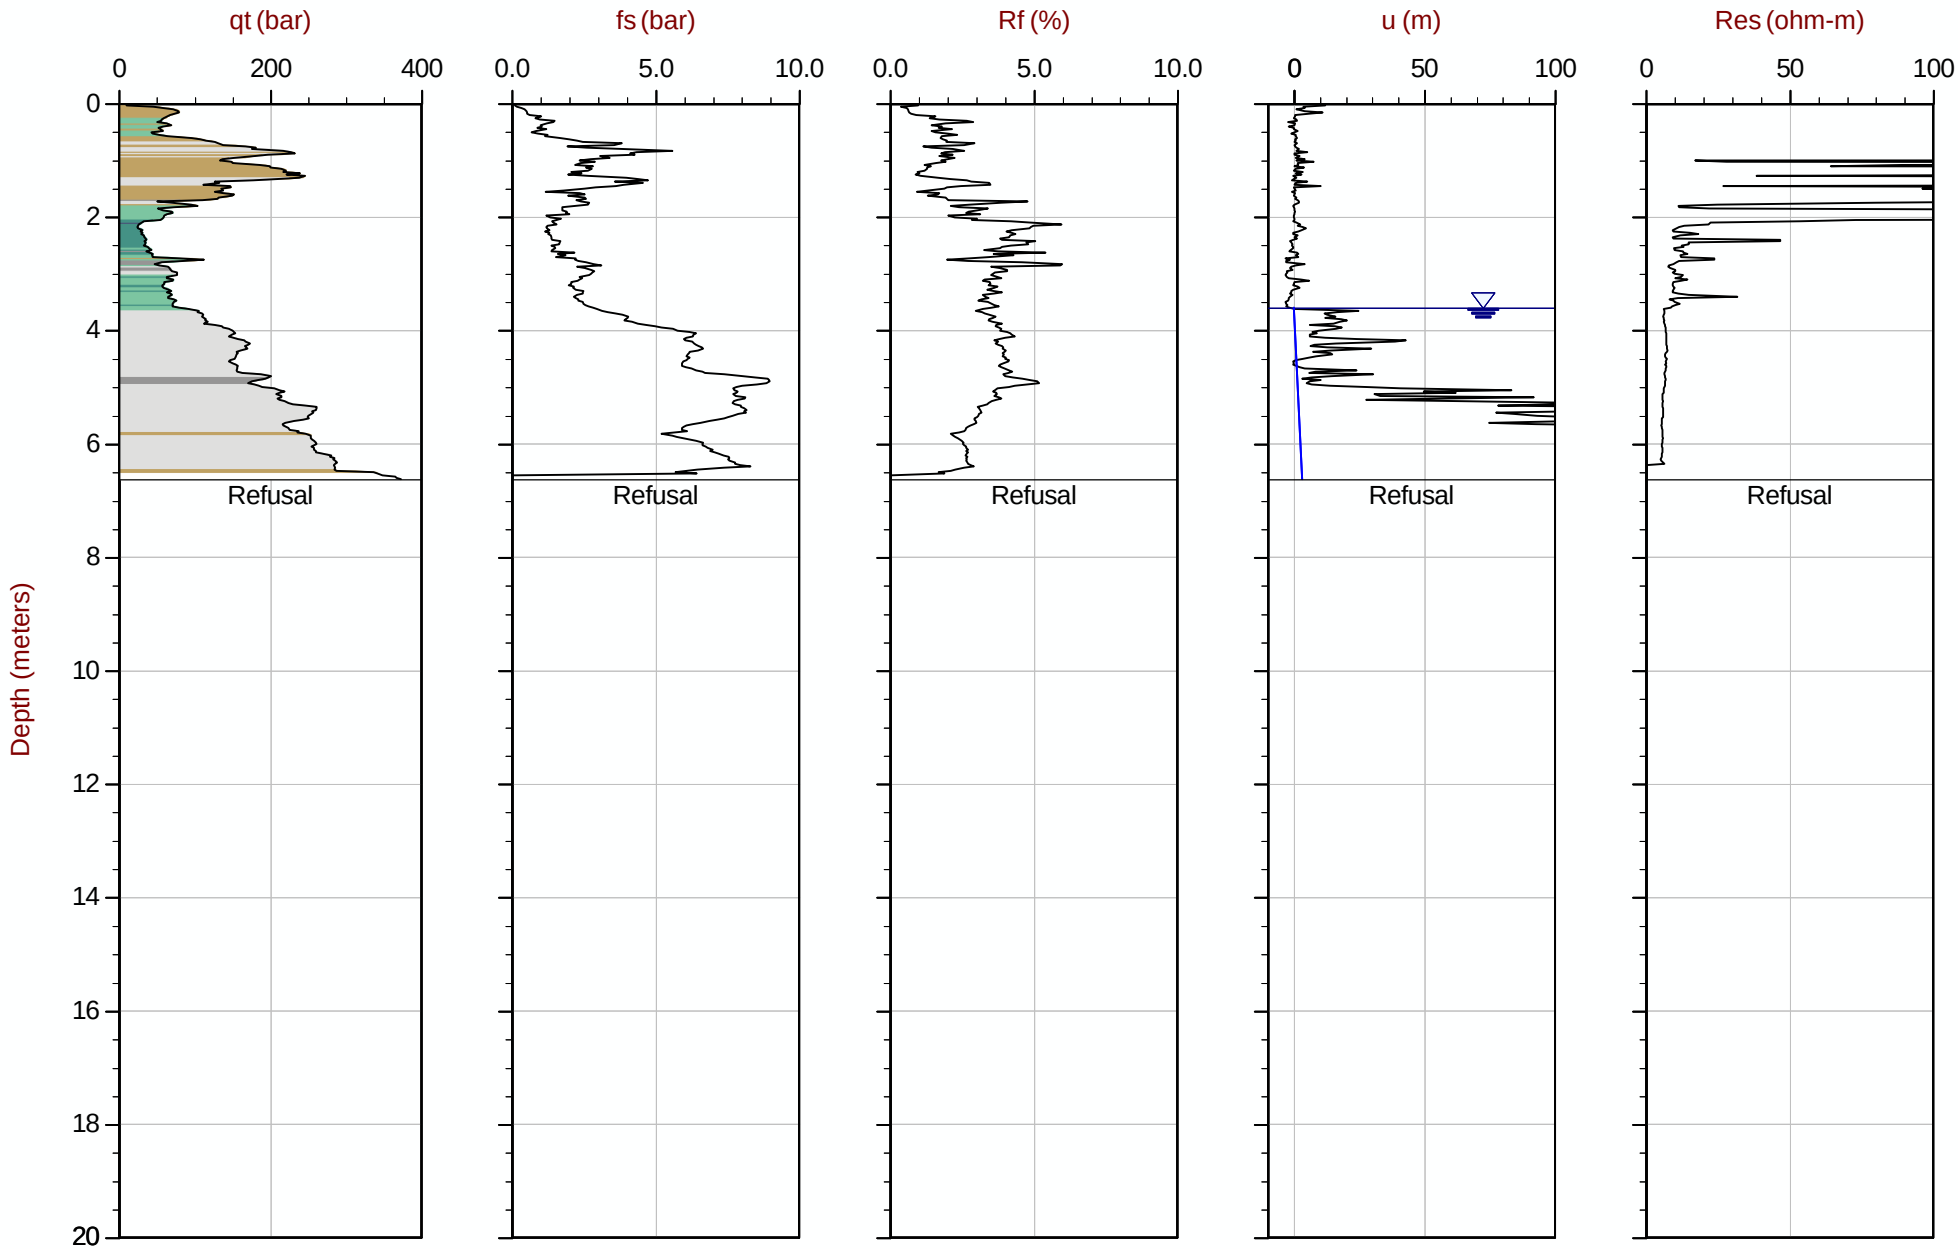

Max Depth: 6.625 m / 21.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT229.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611058m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 16:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT230
Cone: 854:T1500F15U35 Area= 15cm2

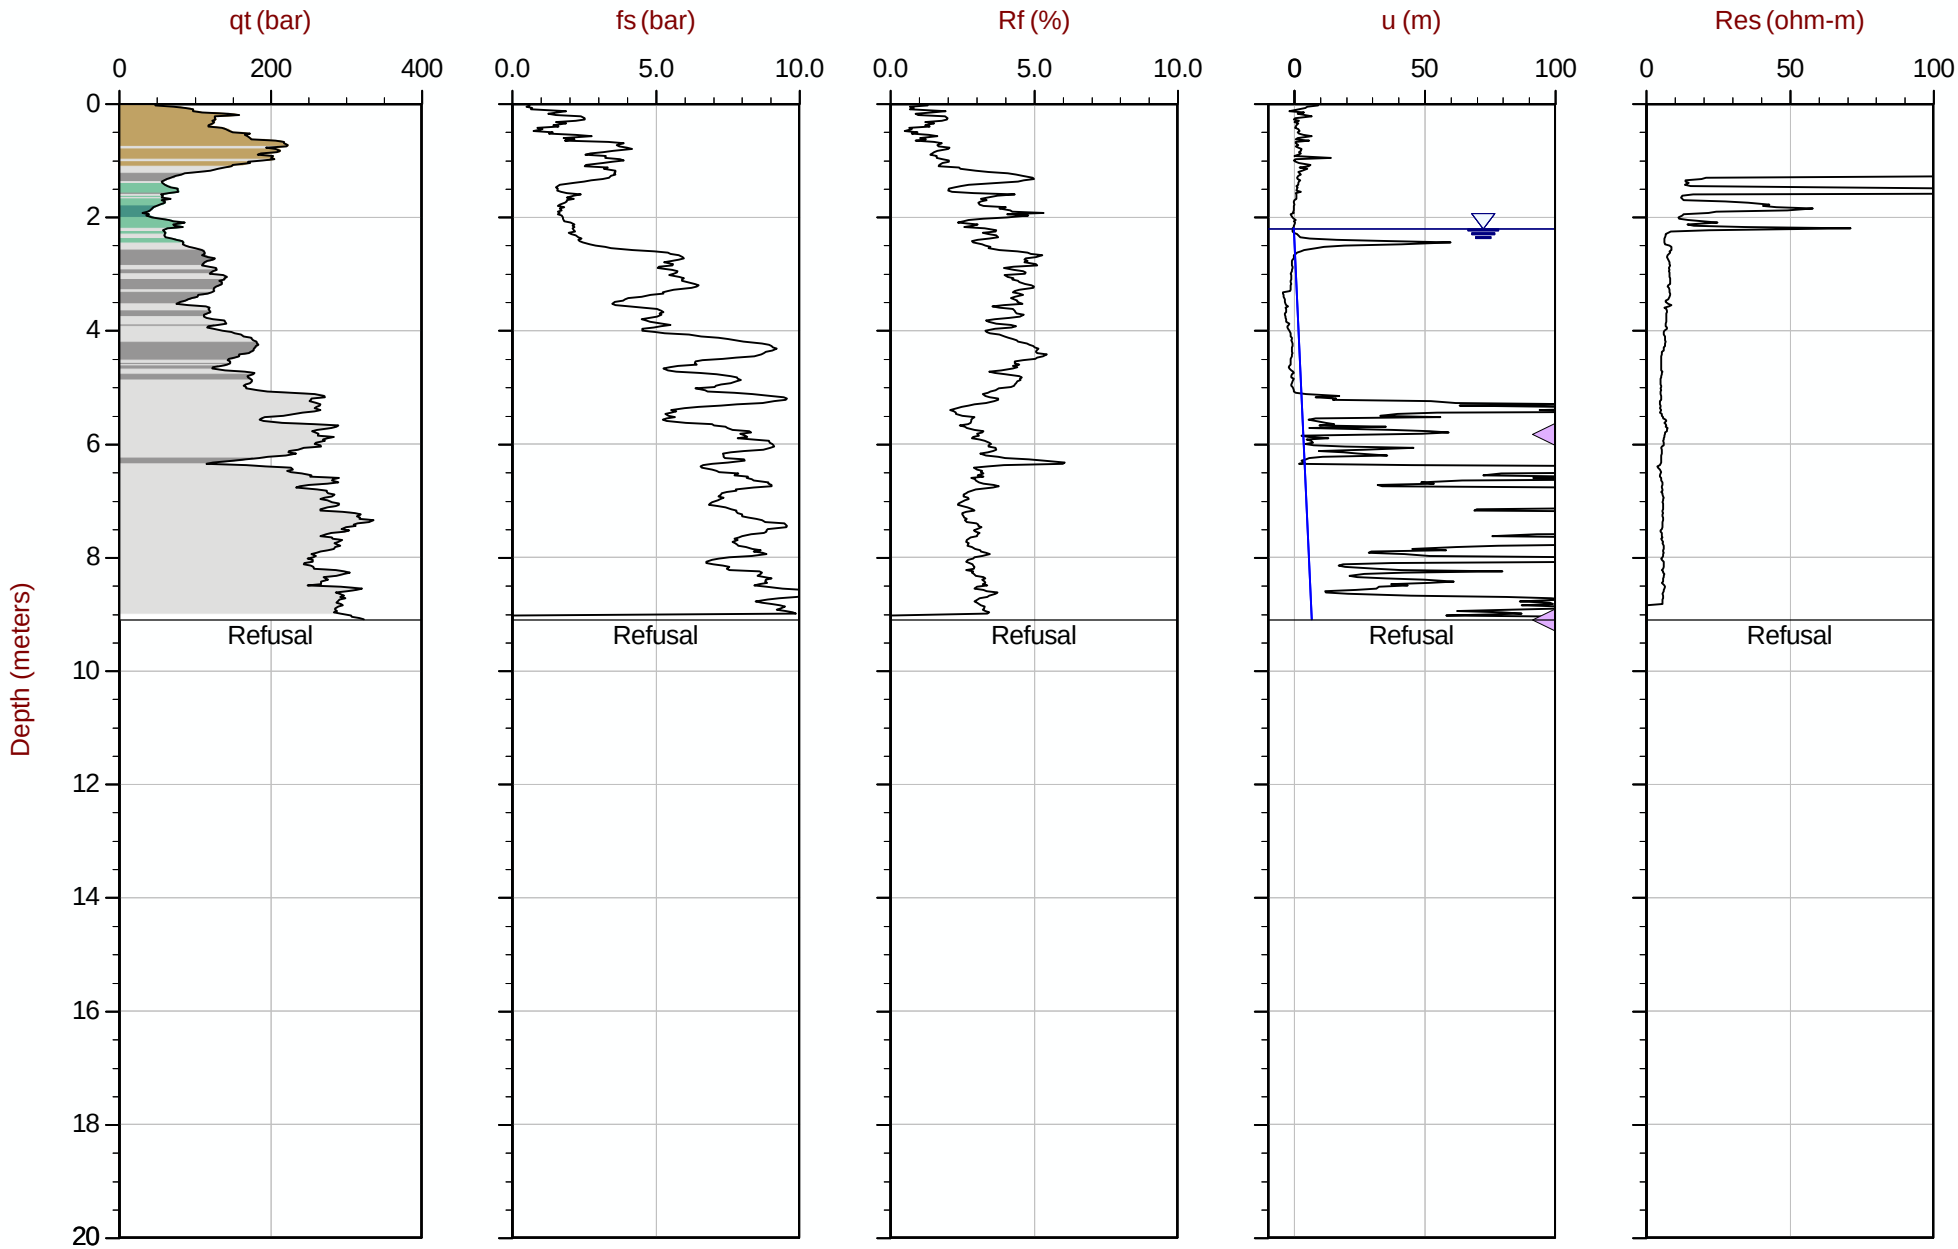

Max Depth: 9.100 m / 29.86 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT230.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611008m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 09:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT231
Cone: 854:T1500F15U35 Area= 15cm2

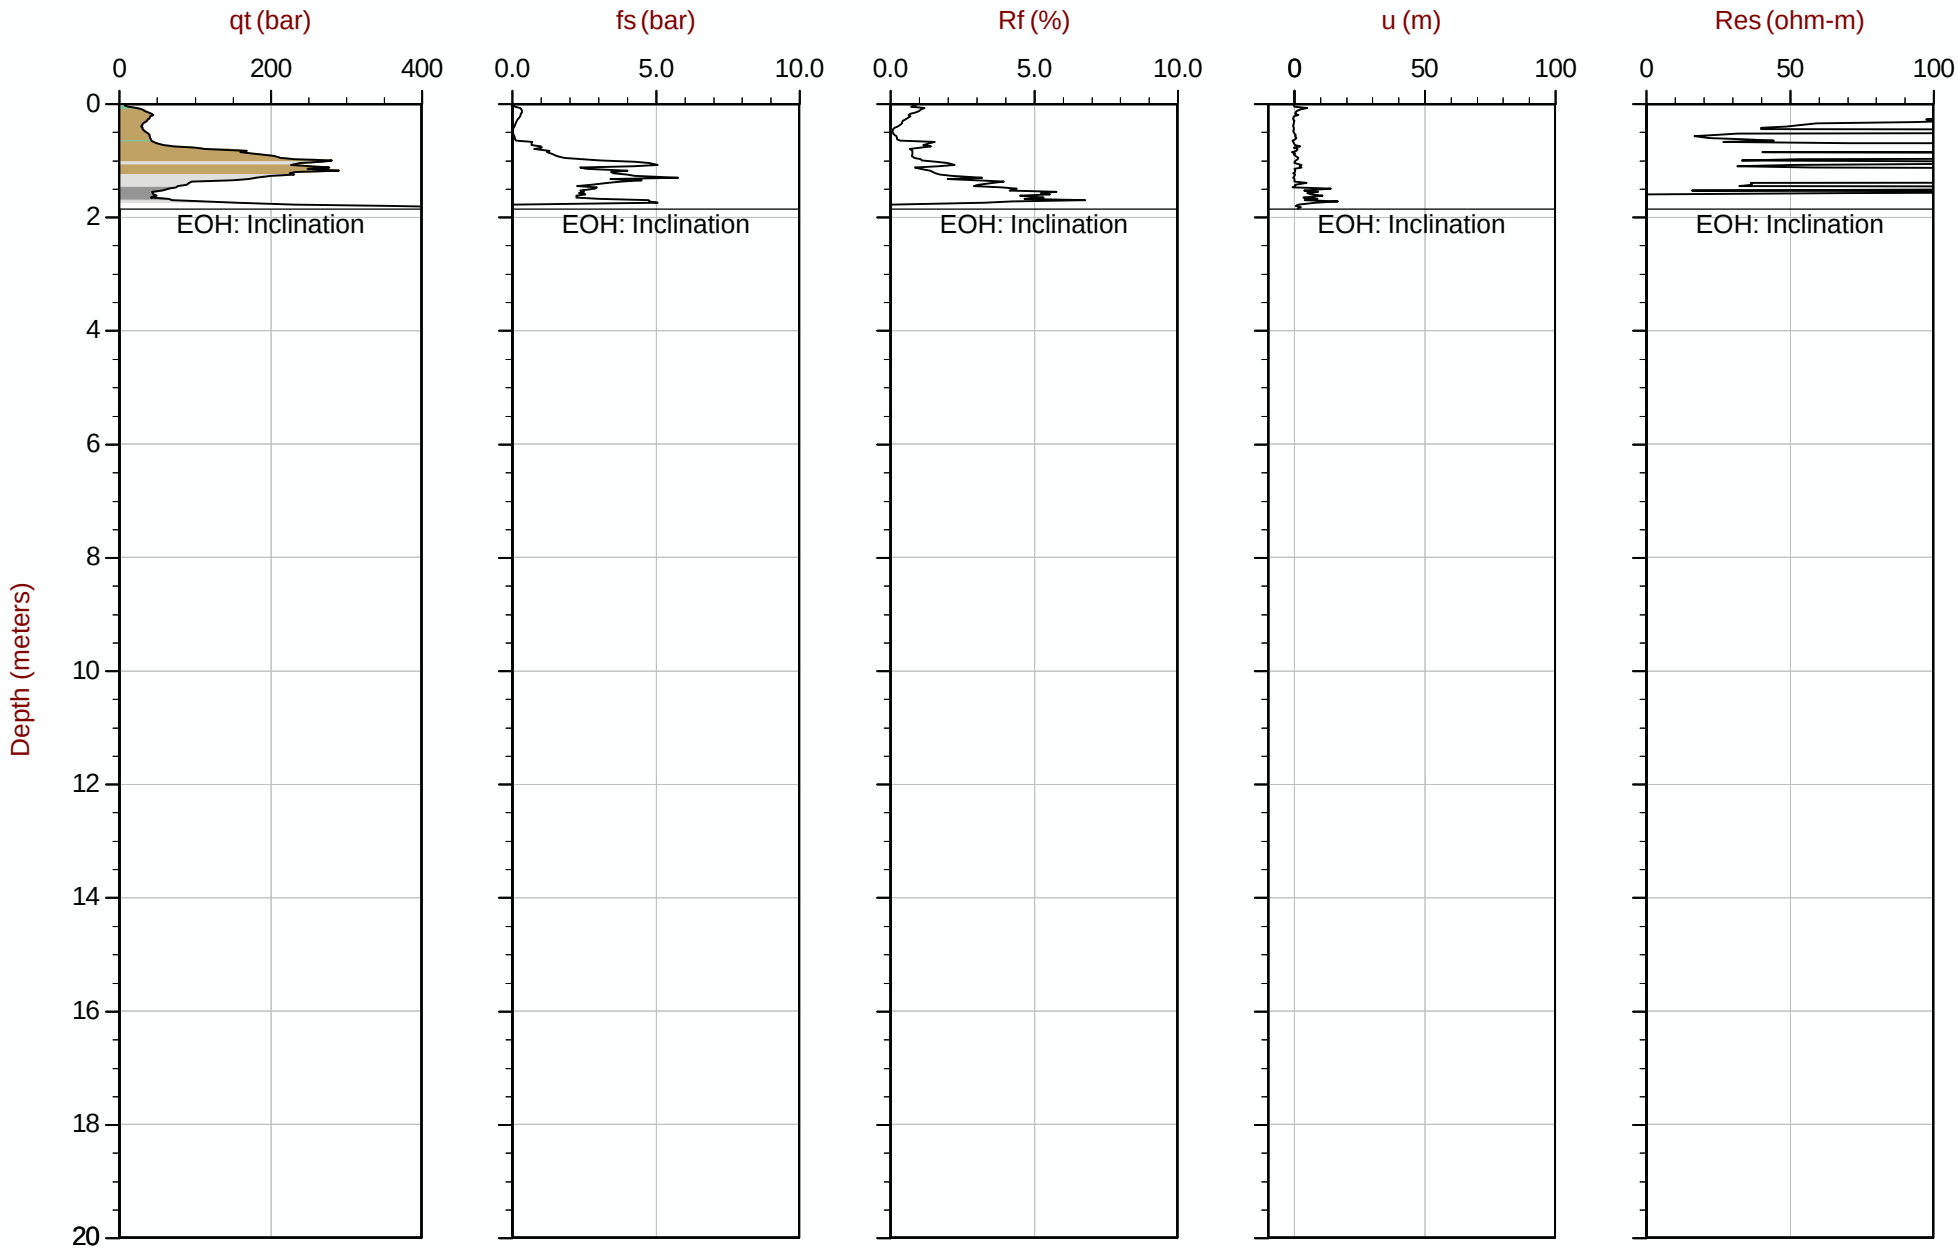

Max Depth: 1.850 m / 6.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT231.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610958m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 09:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT231A
Cone: 854:T1500F15U35 Area= 15cm2

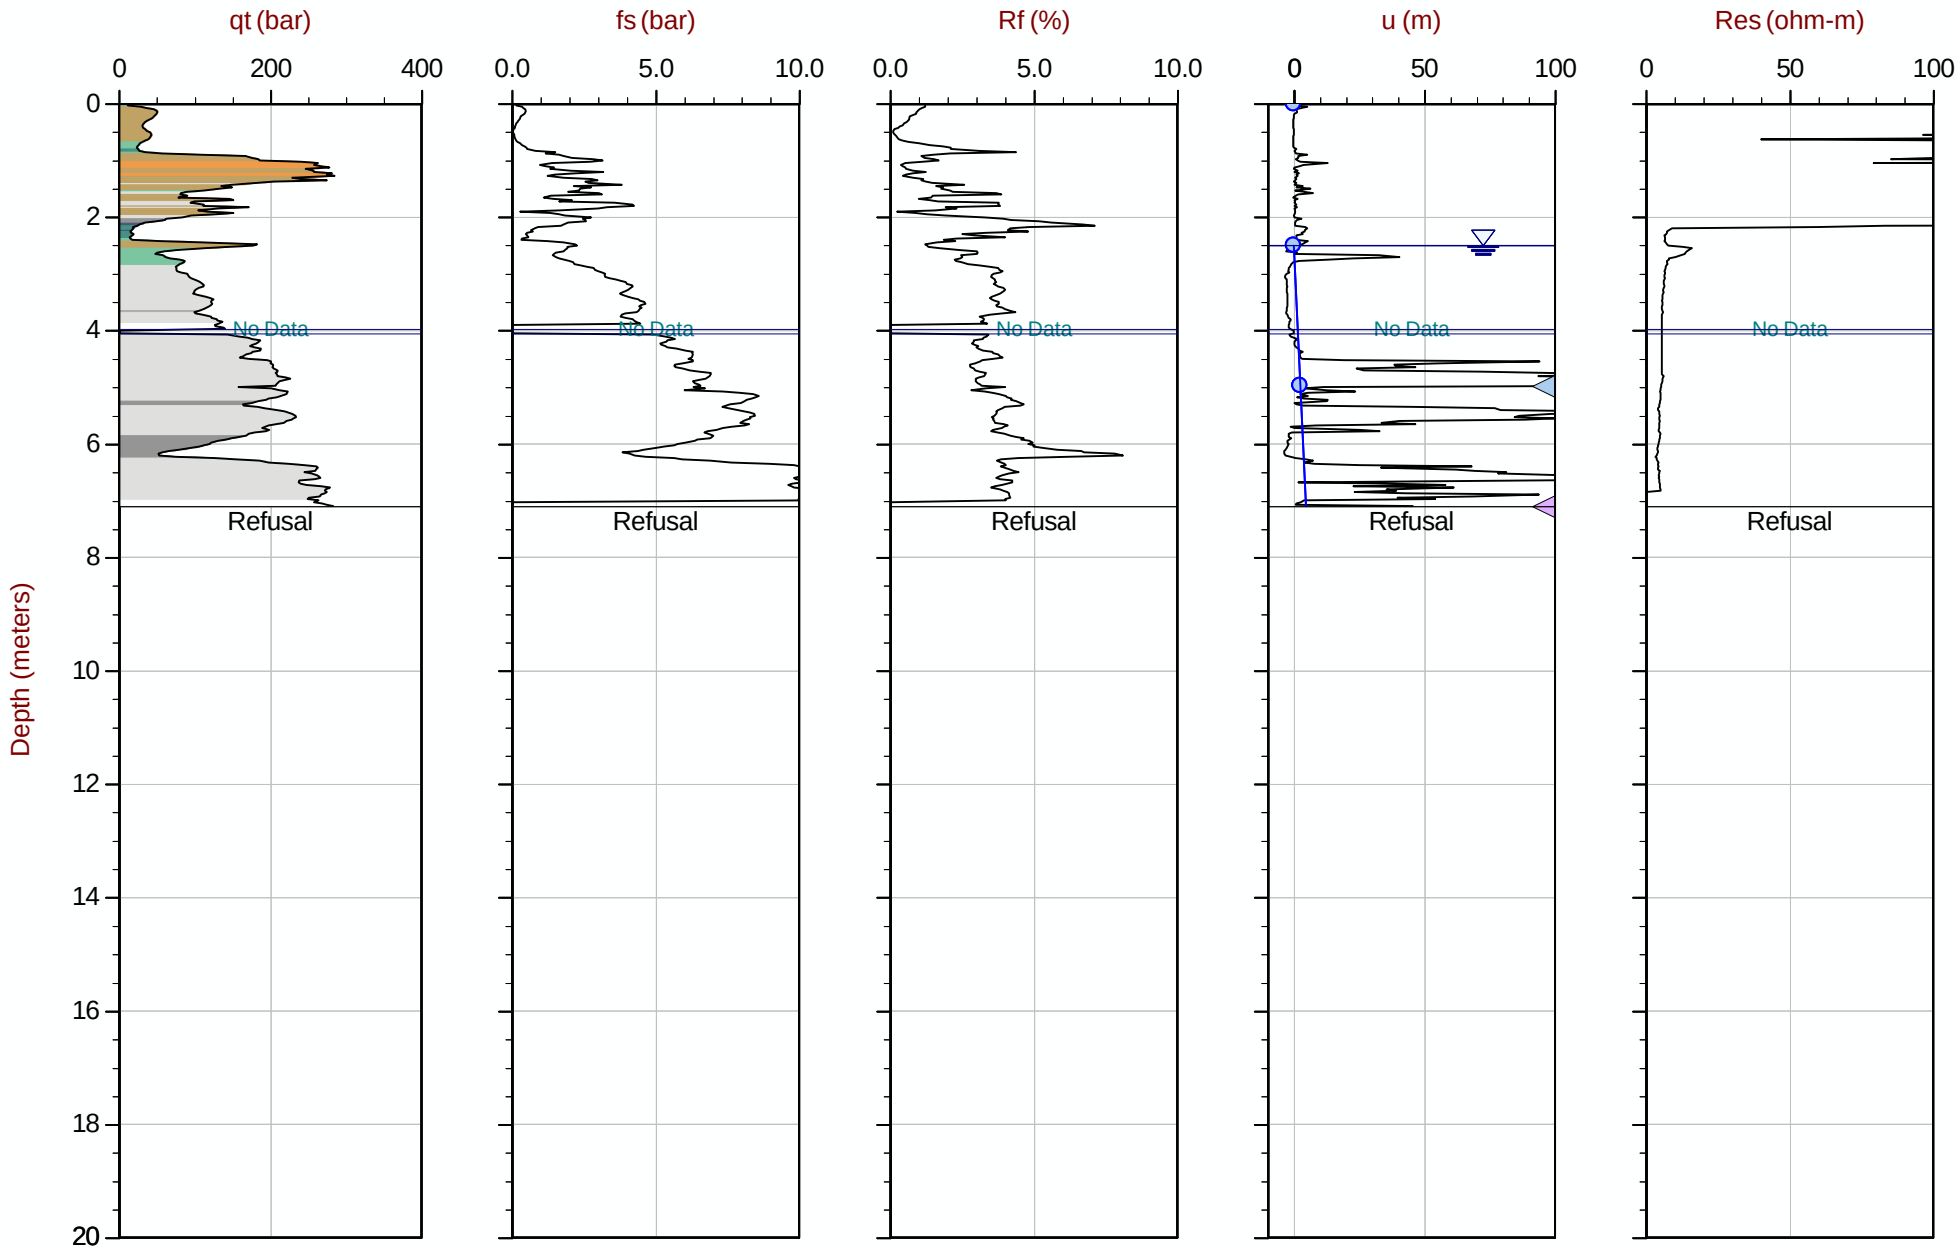

Max Depth: 7.100 m / 23.29 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT231A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610958m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 10:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT232
Cone: 854:T1500F15U35 Area= 15cm2

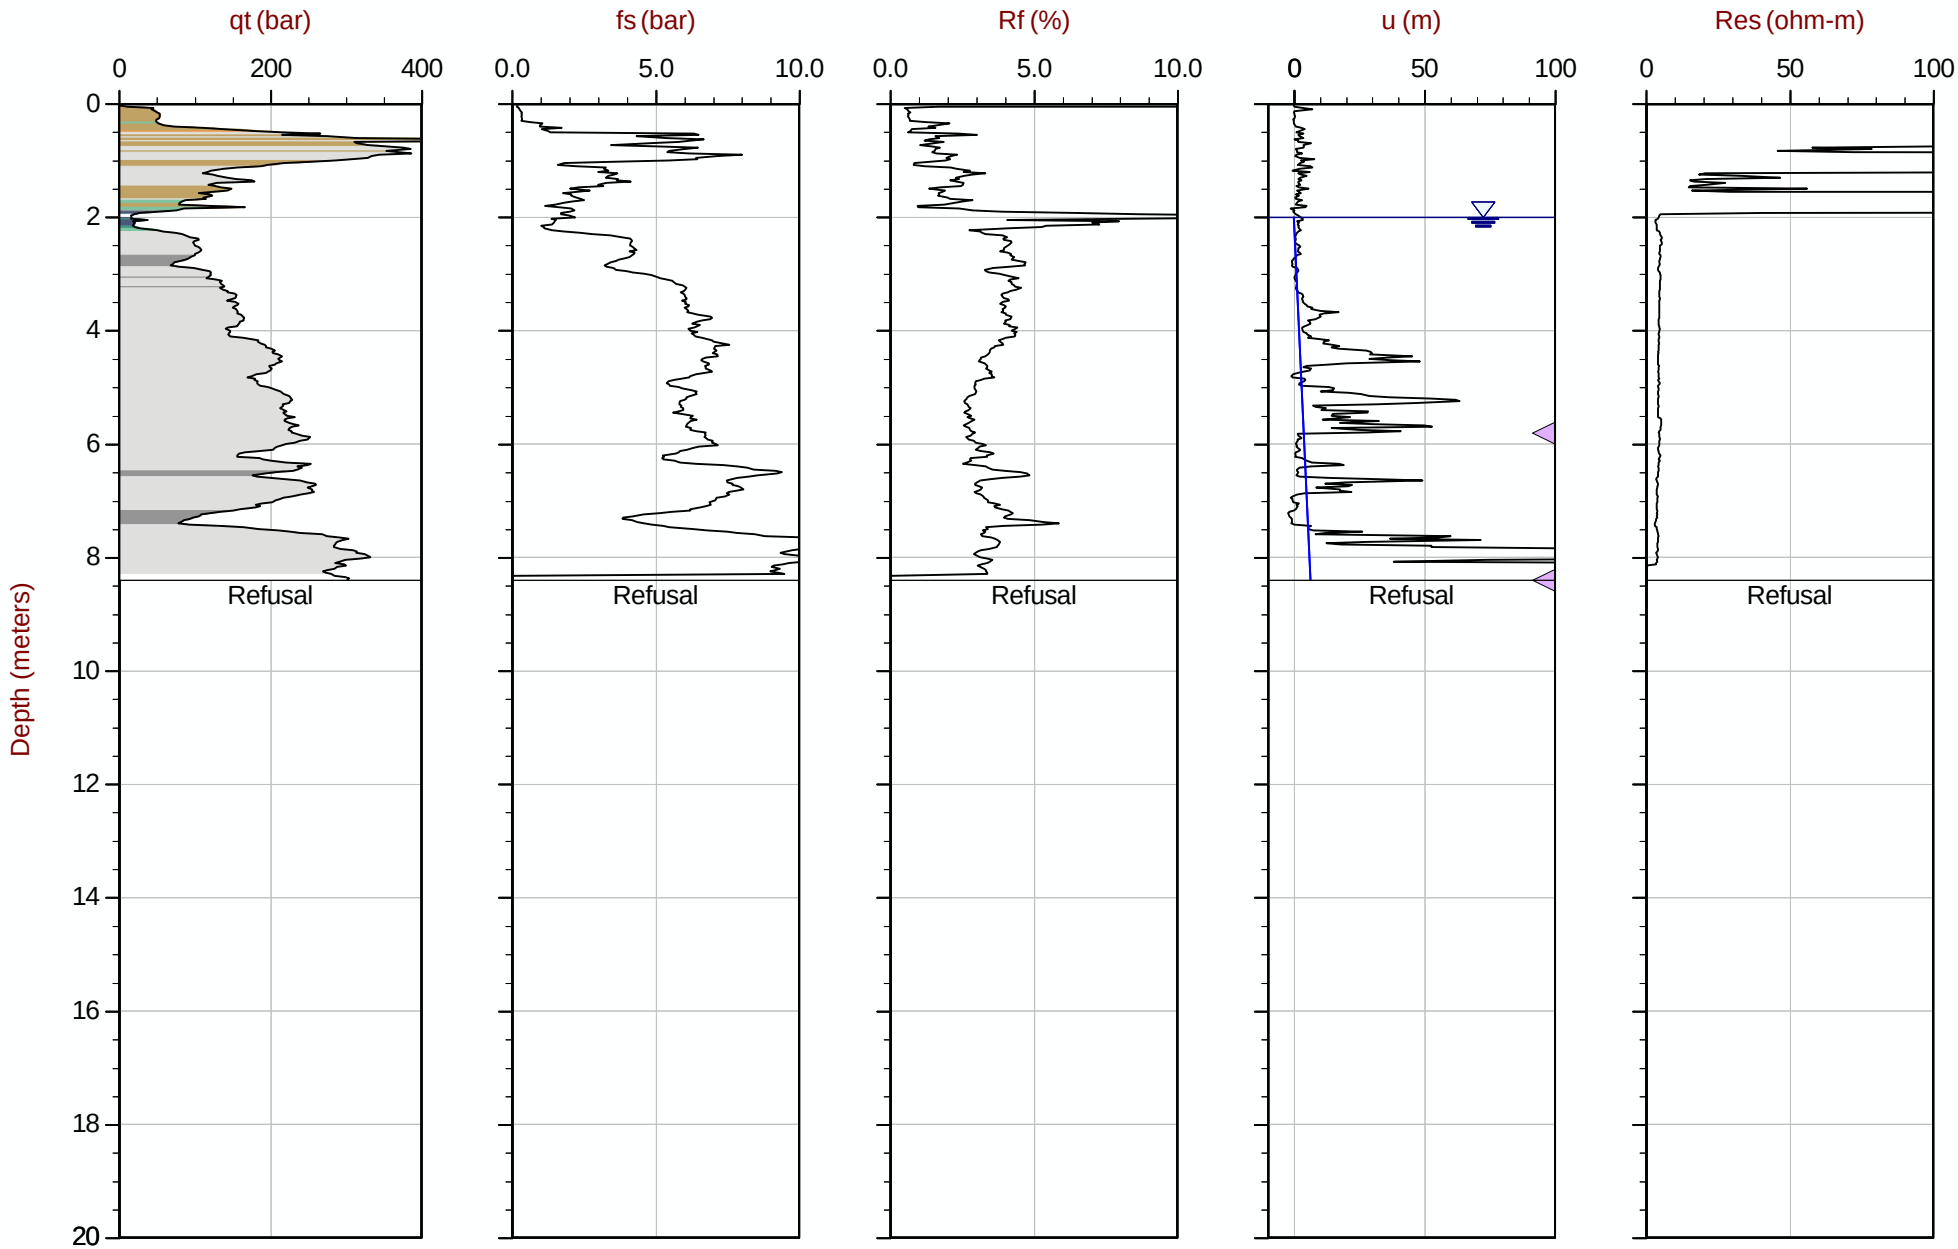

Max Depth: 8.400 m / 27.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT232.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610907m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 12:15
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT233
Cone: 854:T1500F15U35 Area= 15cm2

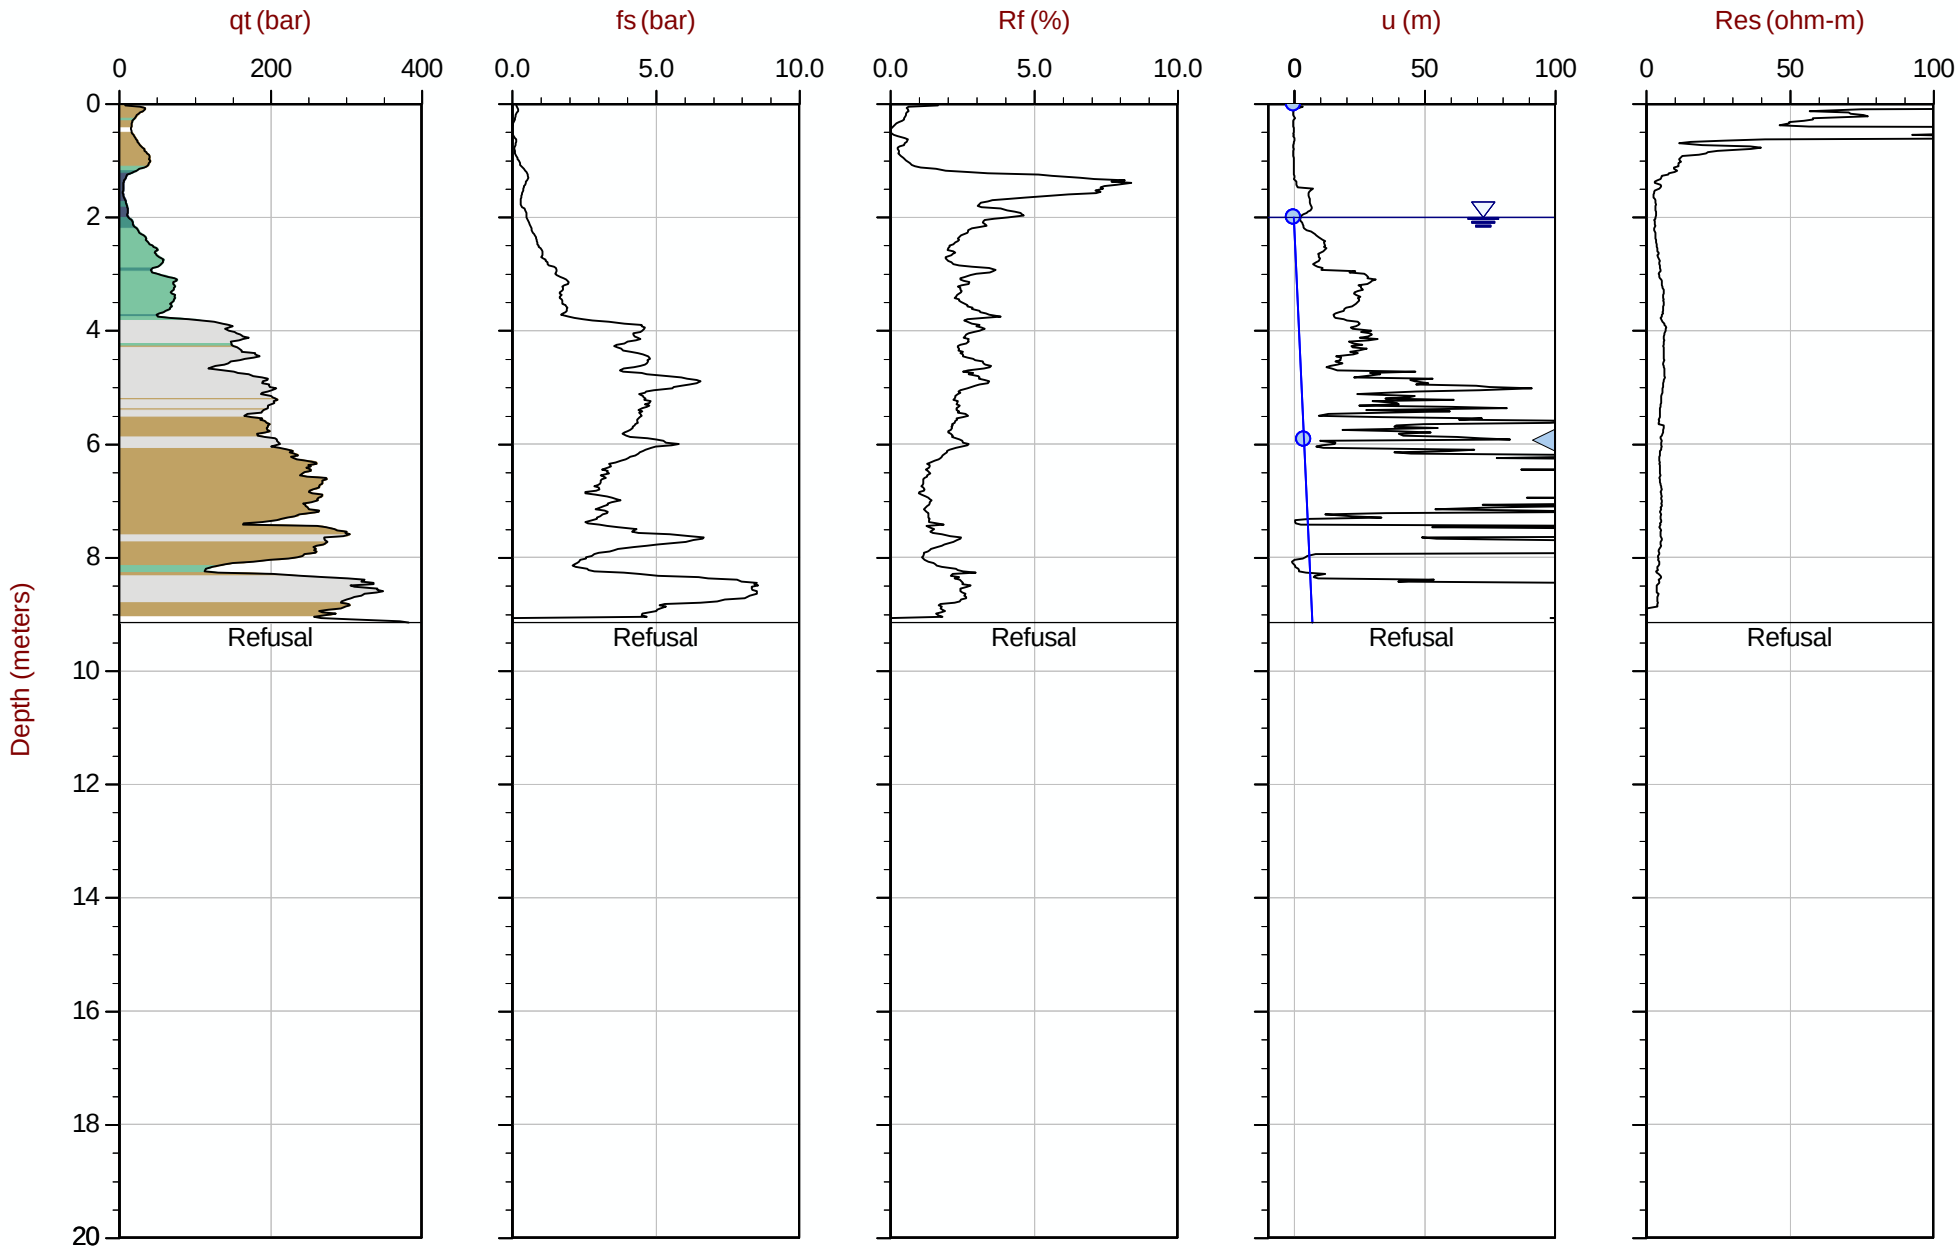

Max Depth: 9.150 m / 30.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT233.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610858m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 13:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT234
Cone: 854:T1500F15U35 Area= 15cm2

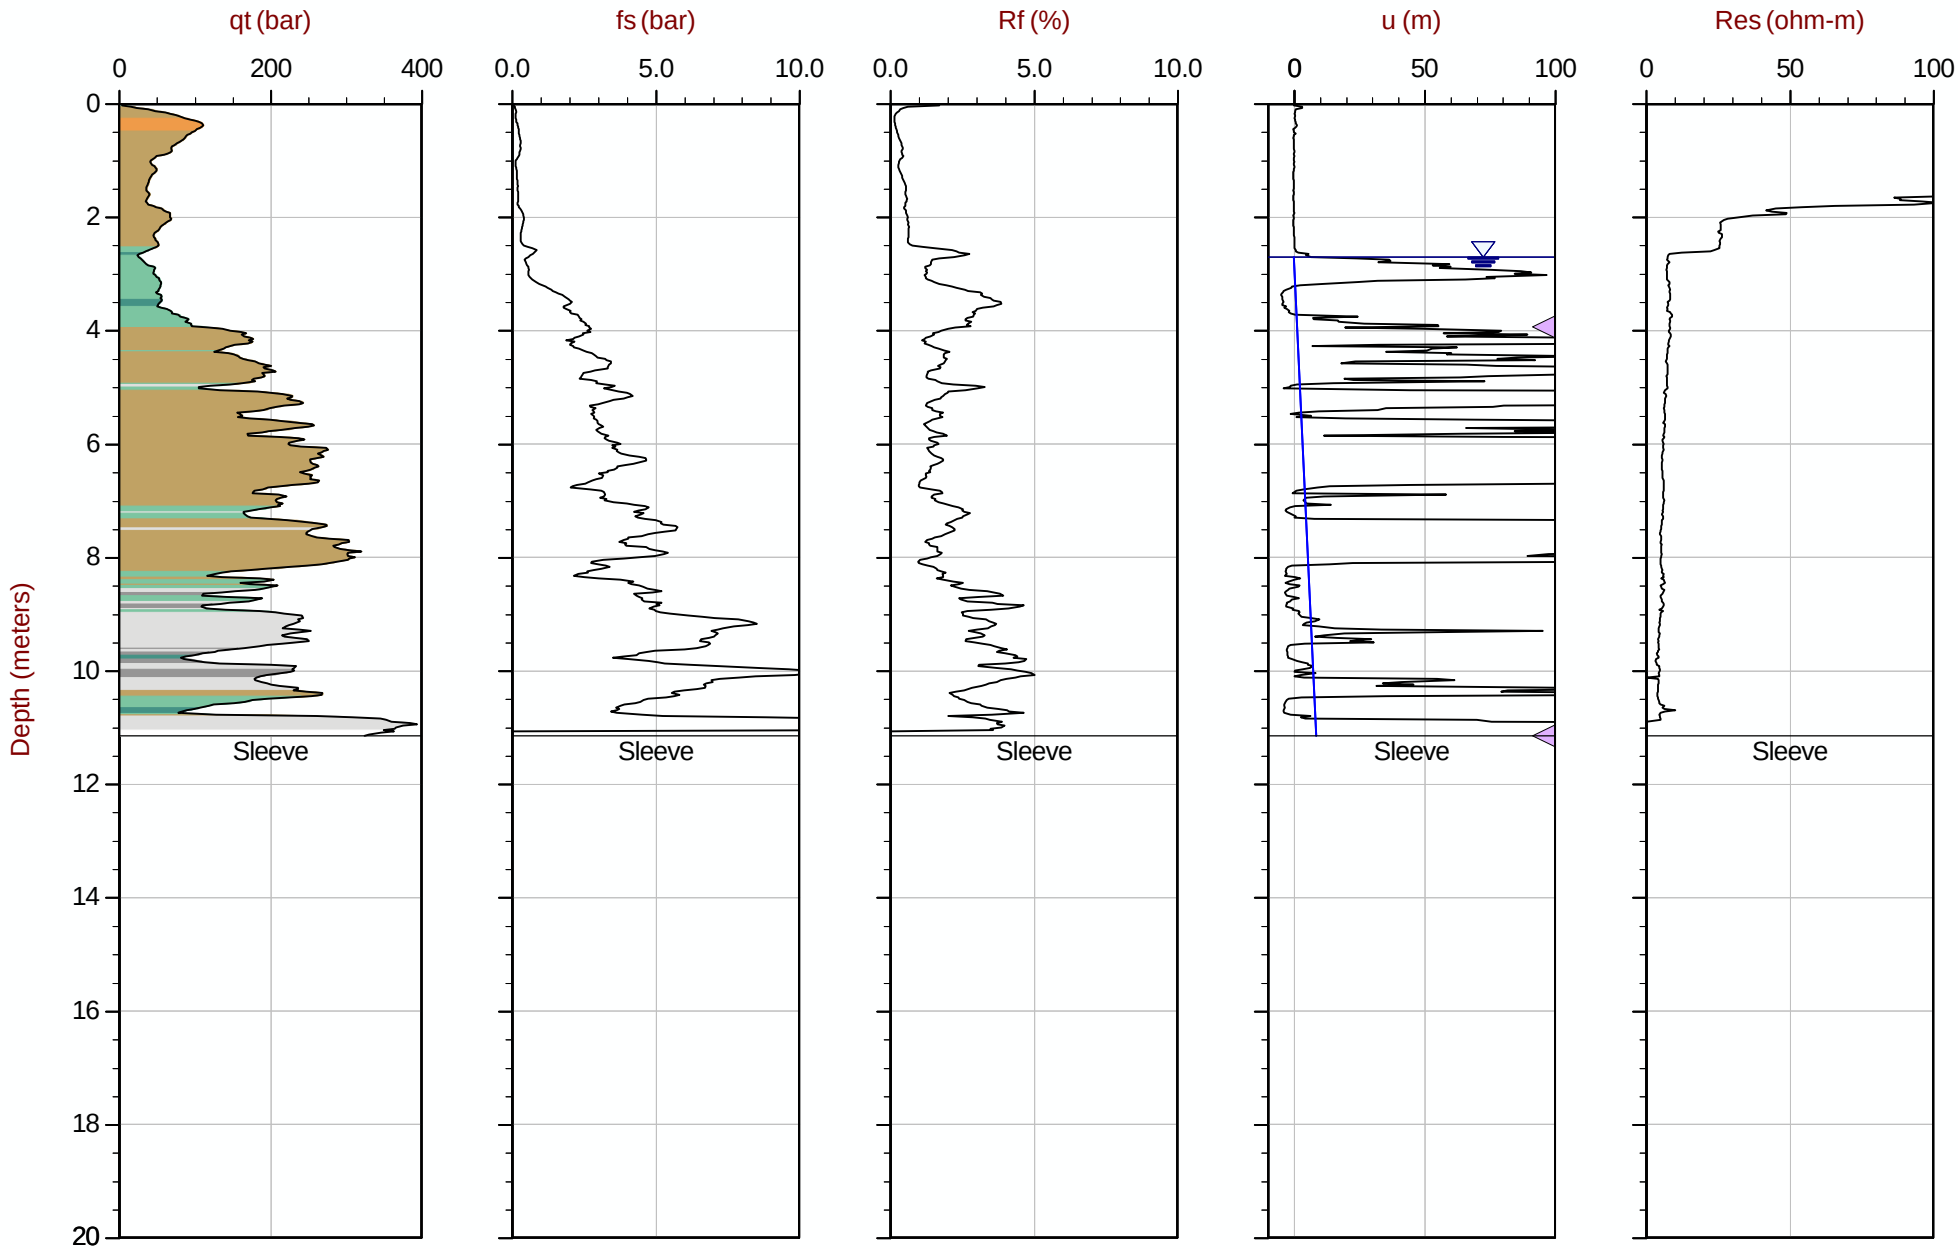

Max Depth: 11.150 m / 36.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT234.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610802m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 14:42
Site: Brooks, Alberta

Sounding: RCPT22-22CPT235
Cone: 854:T1500F15U35 Area= 15cm2

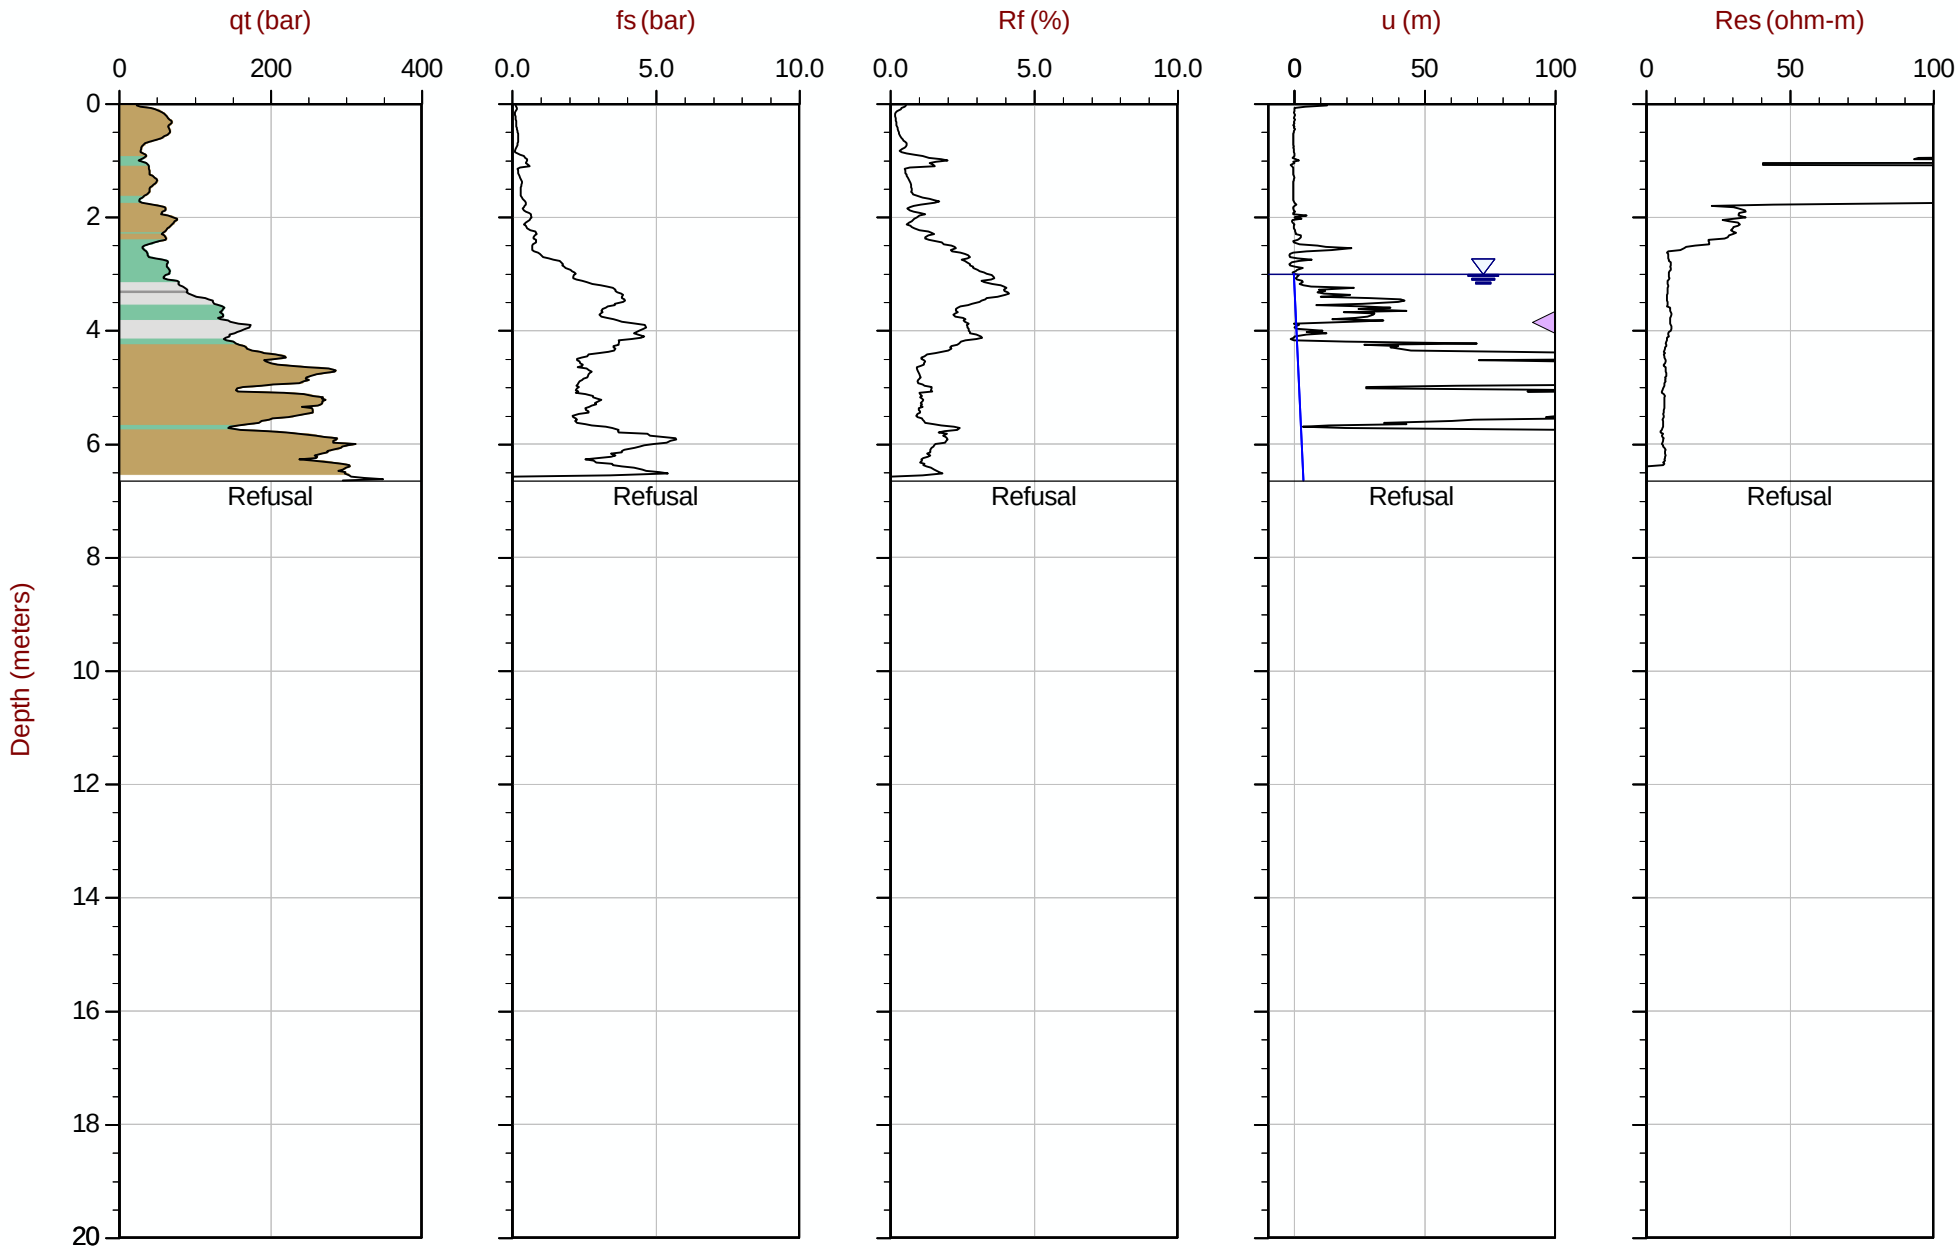

Max Depth: 6.650 m / 21.82 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT235.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610758m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 15:41
Site: Brooks, Alberta

Sounding: RCPT22-22CPT236
Cone: 854:T1500F15U35 Area= 15cm2

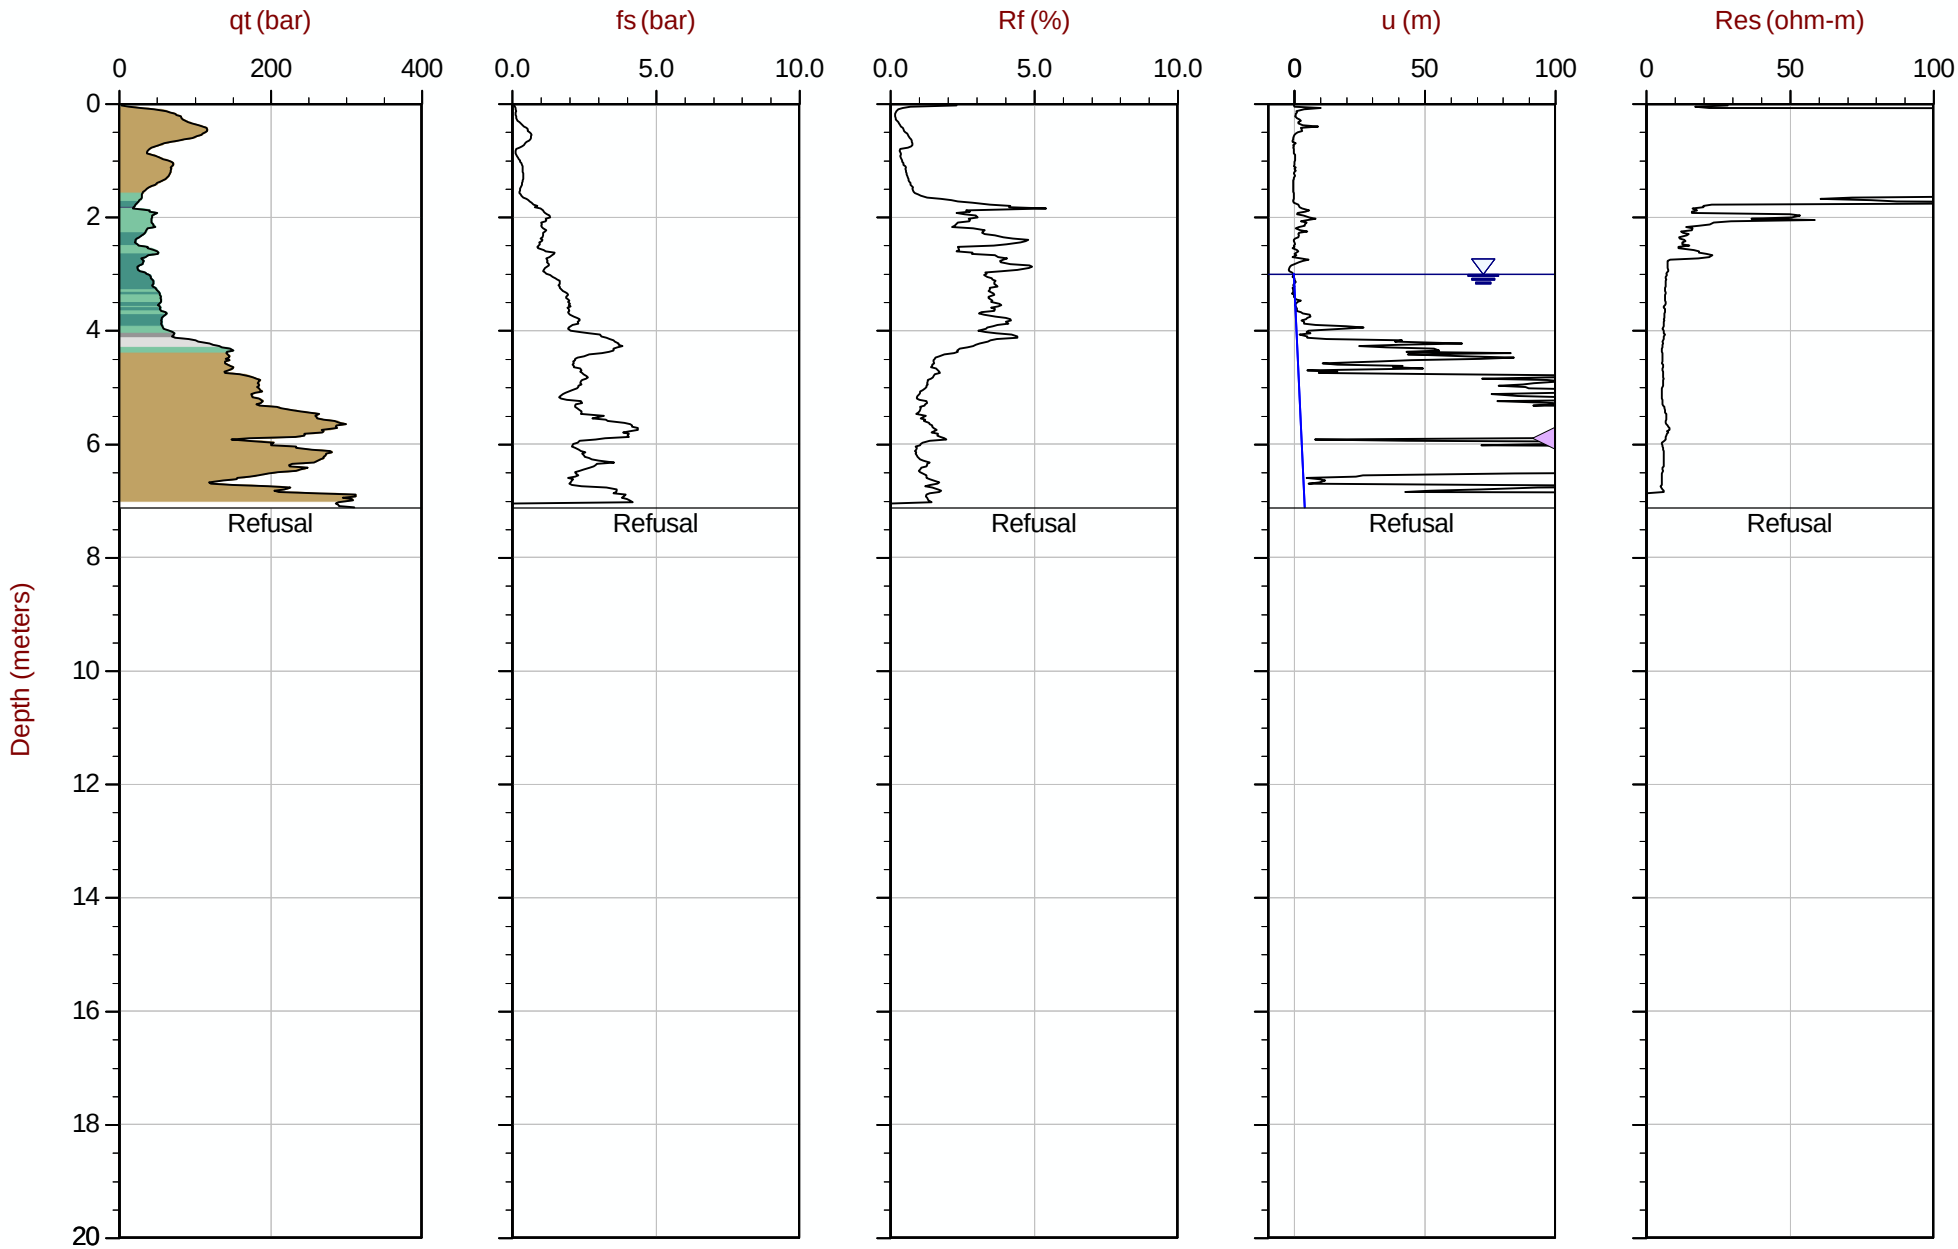

Max Depth: 7.125 m / 23.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT236.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610705m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 16:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT237
Cone: 854:T1500F15U35 Area= 15cm2

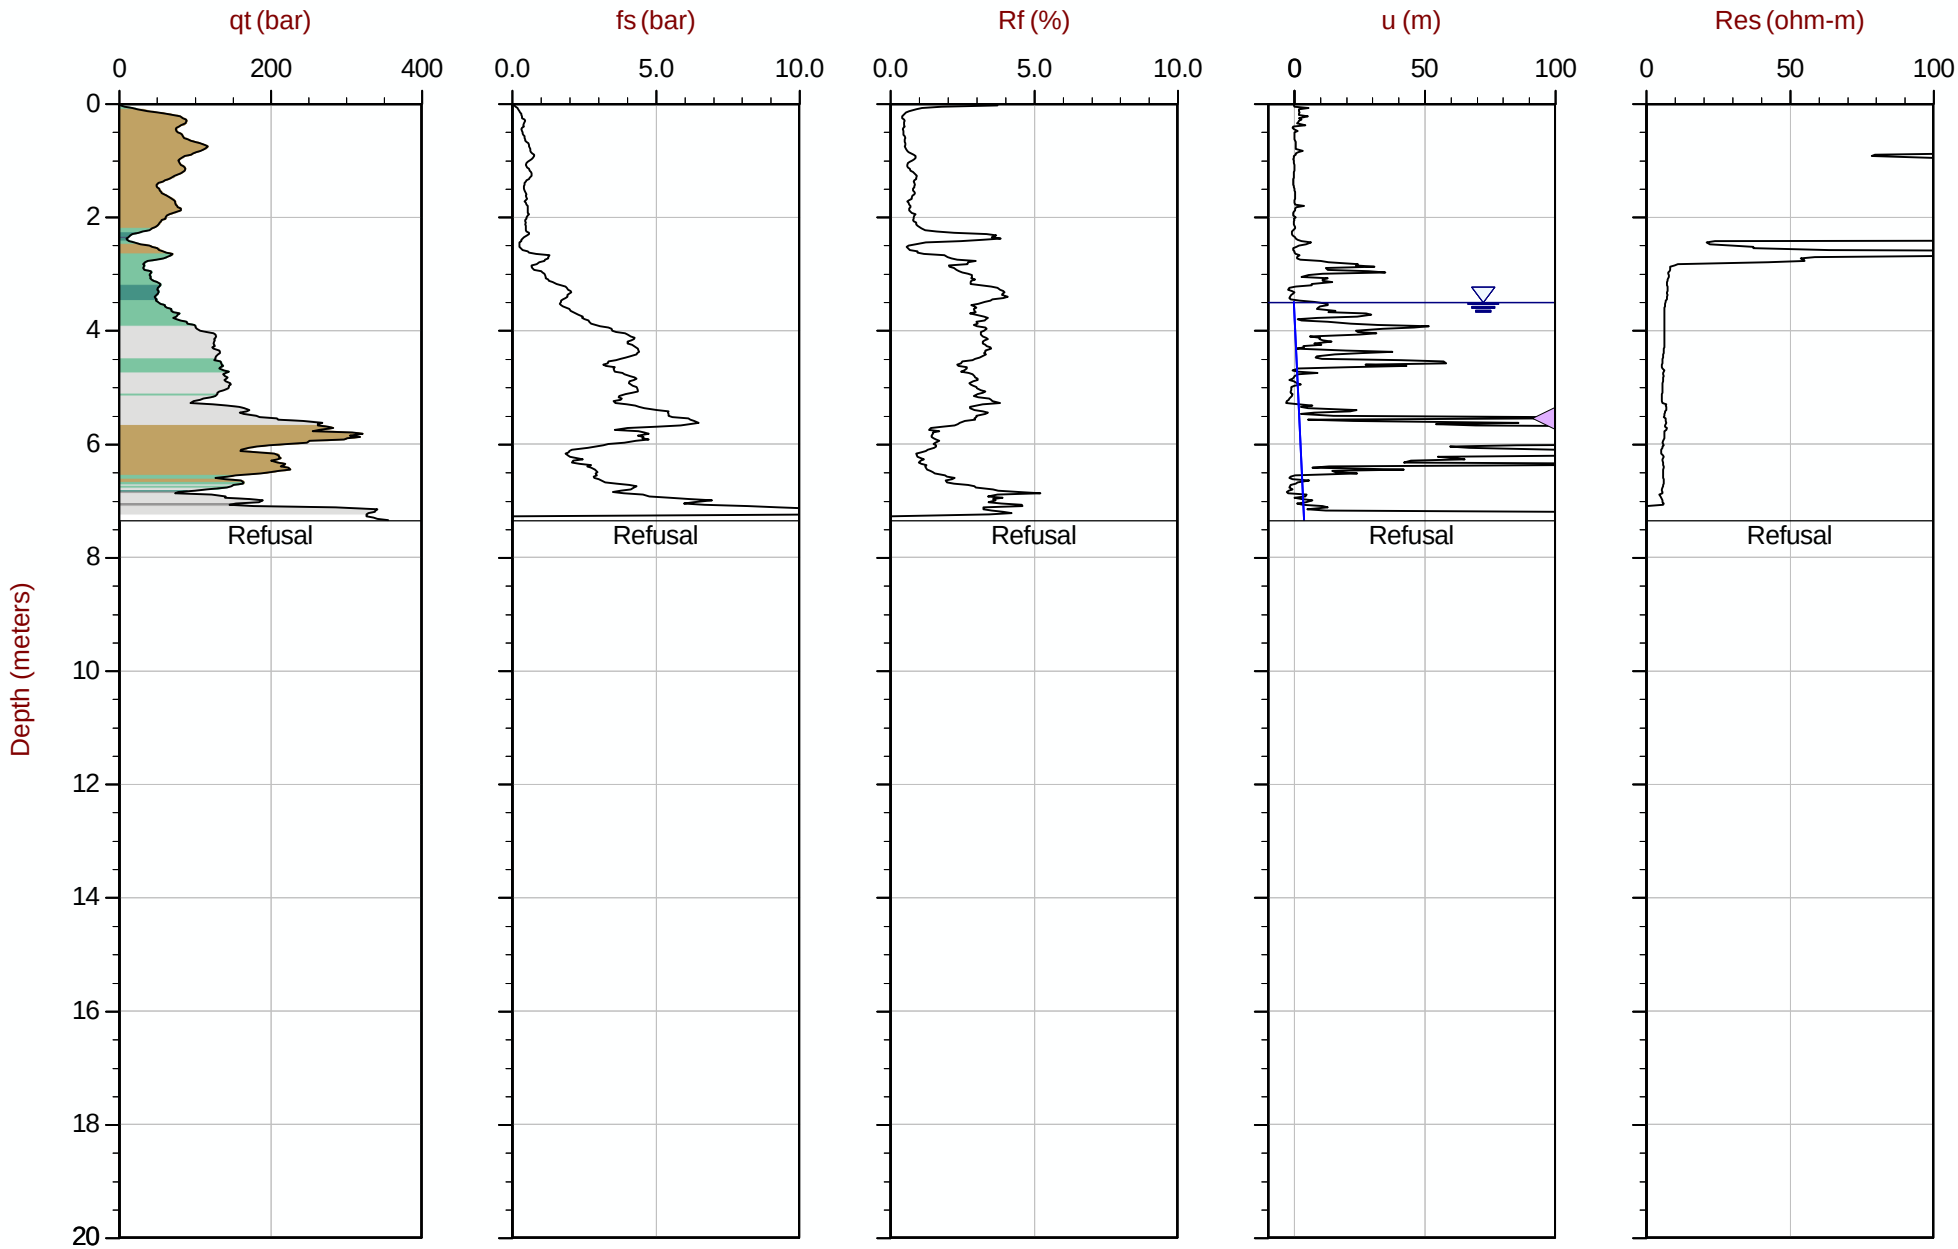

Max Depth: 7.350 m / 24.11 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT237.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610658m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 07:15
Site: Brooks, Alberta

Sounding: RCPT22-22CPT238
Cone: 854:T1500F15U35 Area= 15cm2

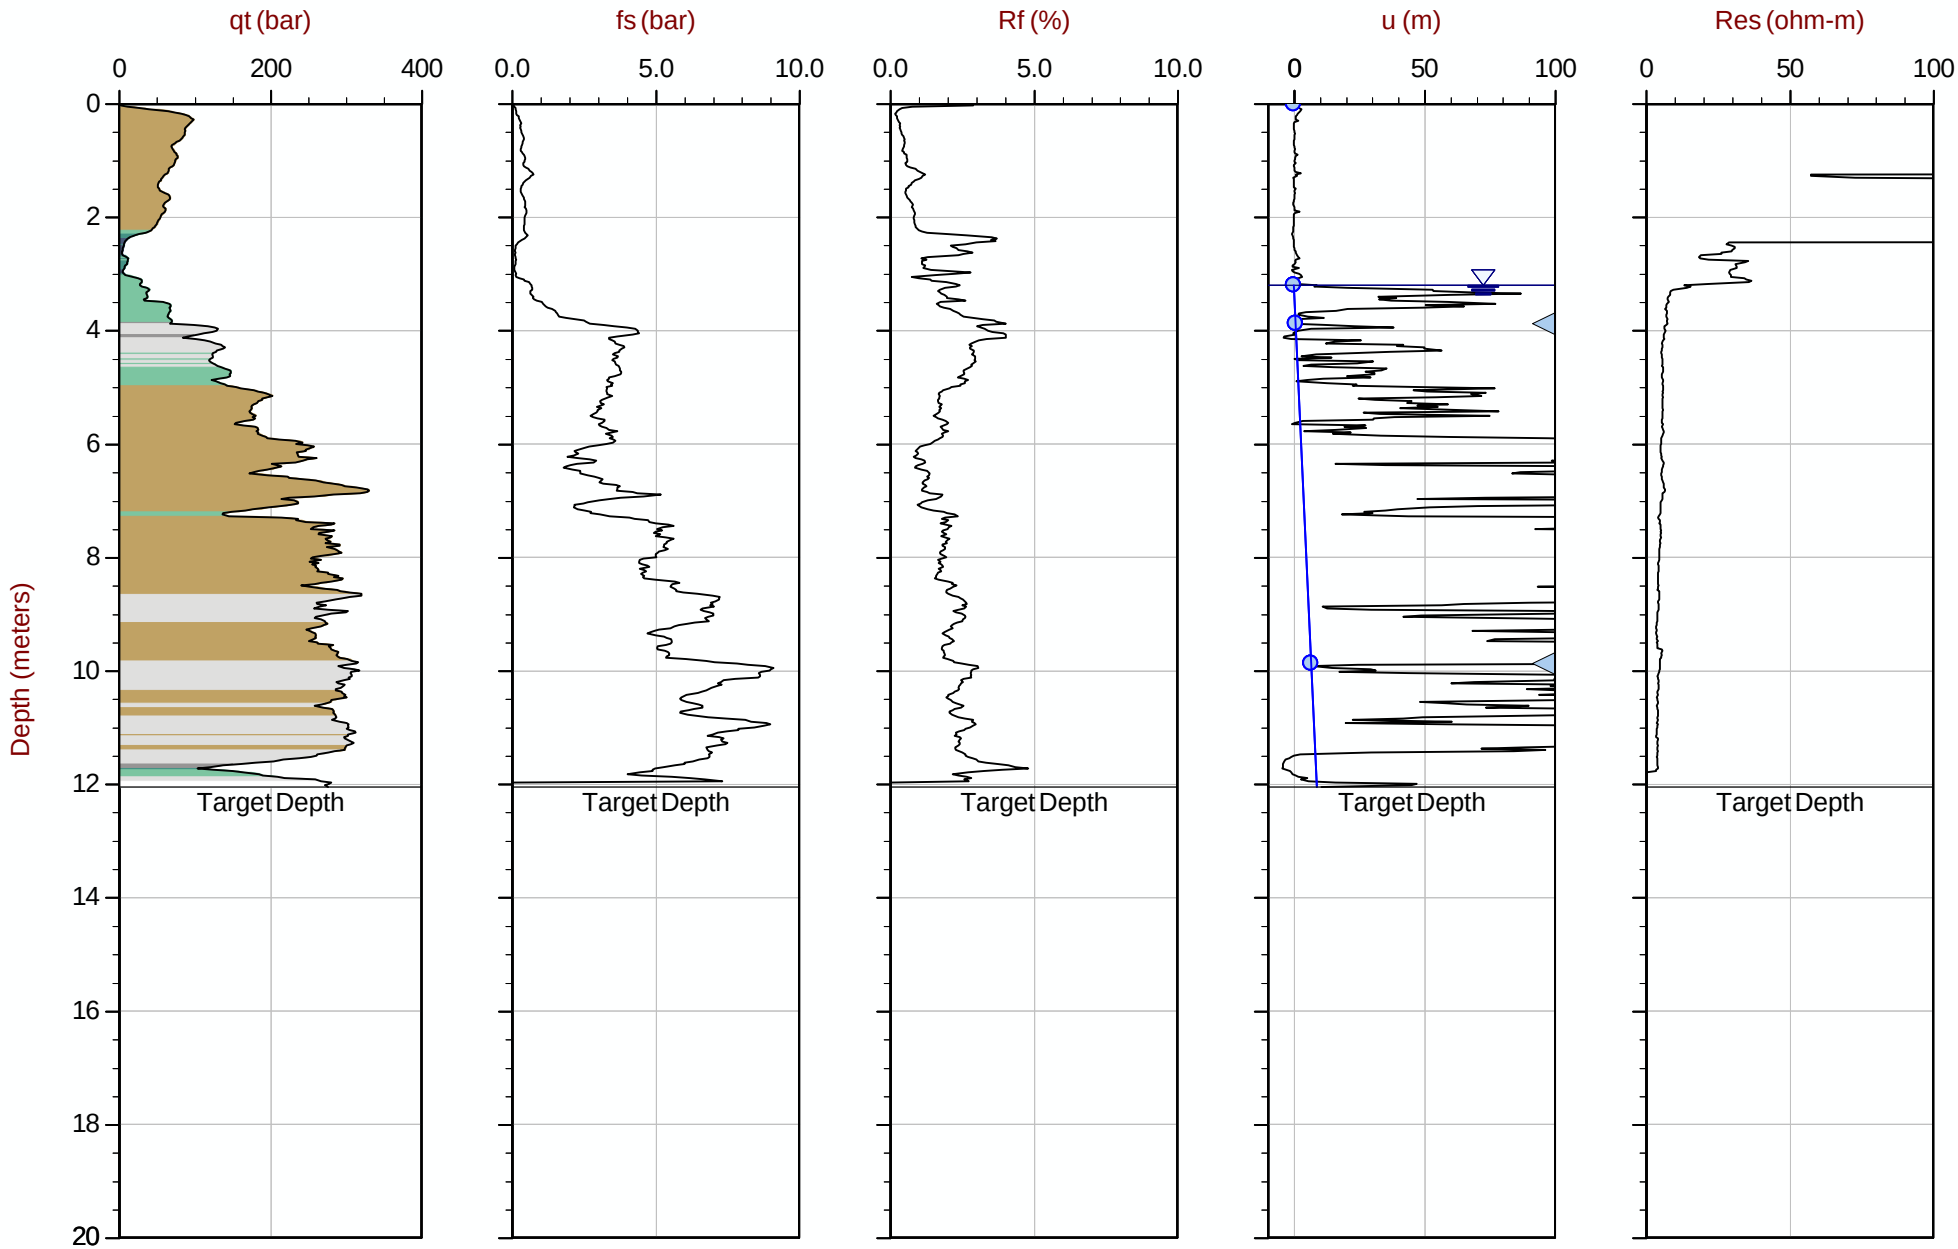

Max Depth: 12.050 m / 39.53 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT238.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610603m E: 416857m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 08:41
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT239
Cone: 854:T1500F15U35 Area= 15cm2

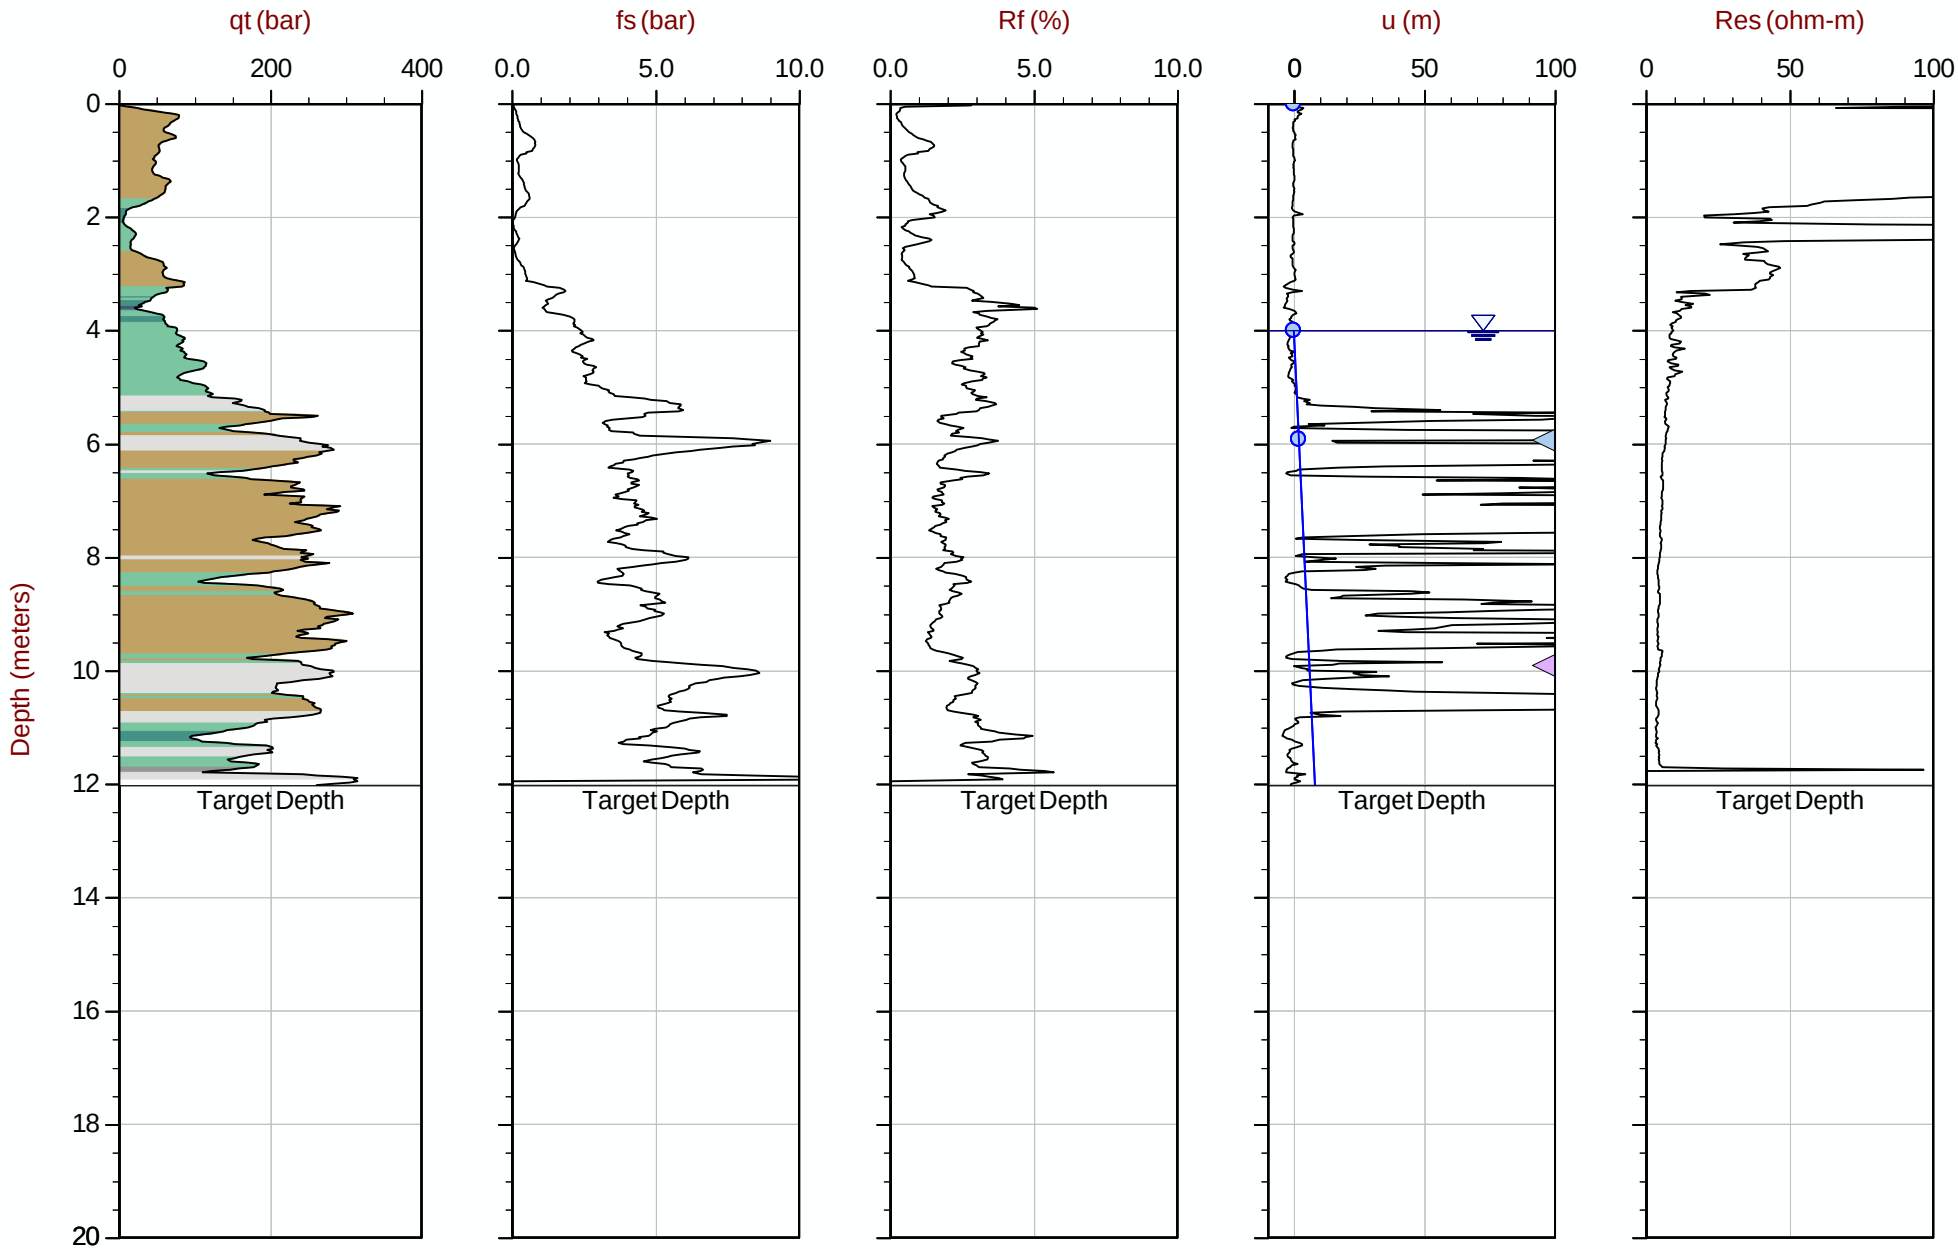

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT239.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610550m E: 416856m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 09:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT240
Cone: 854:T1500F15U35 Area= 15cm2

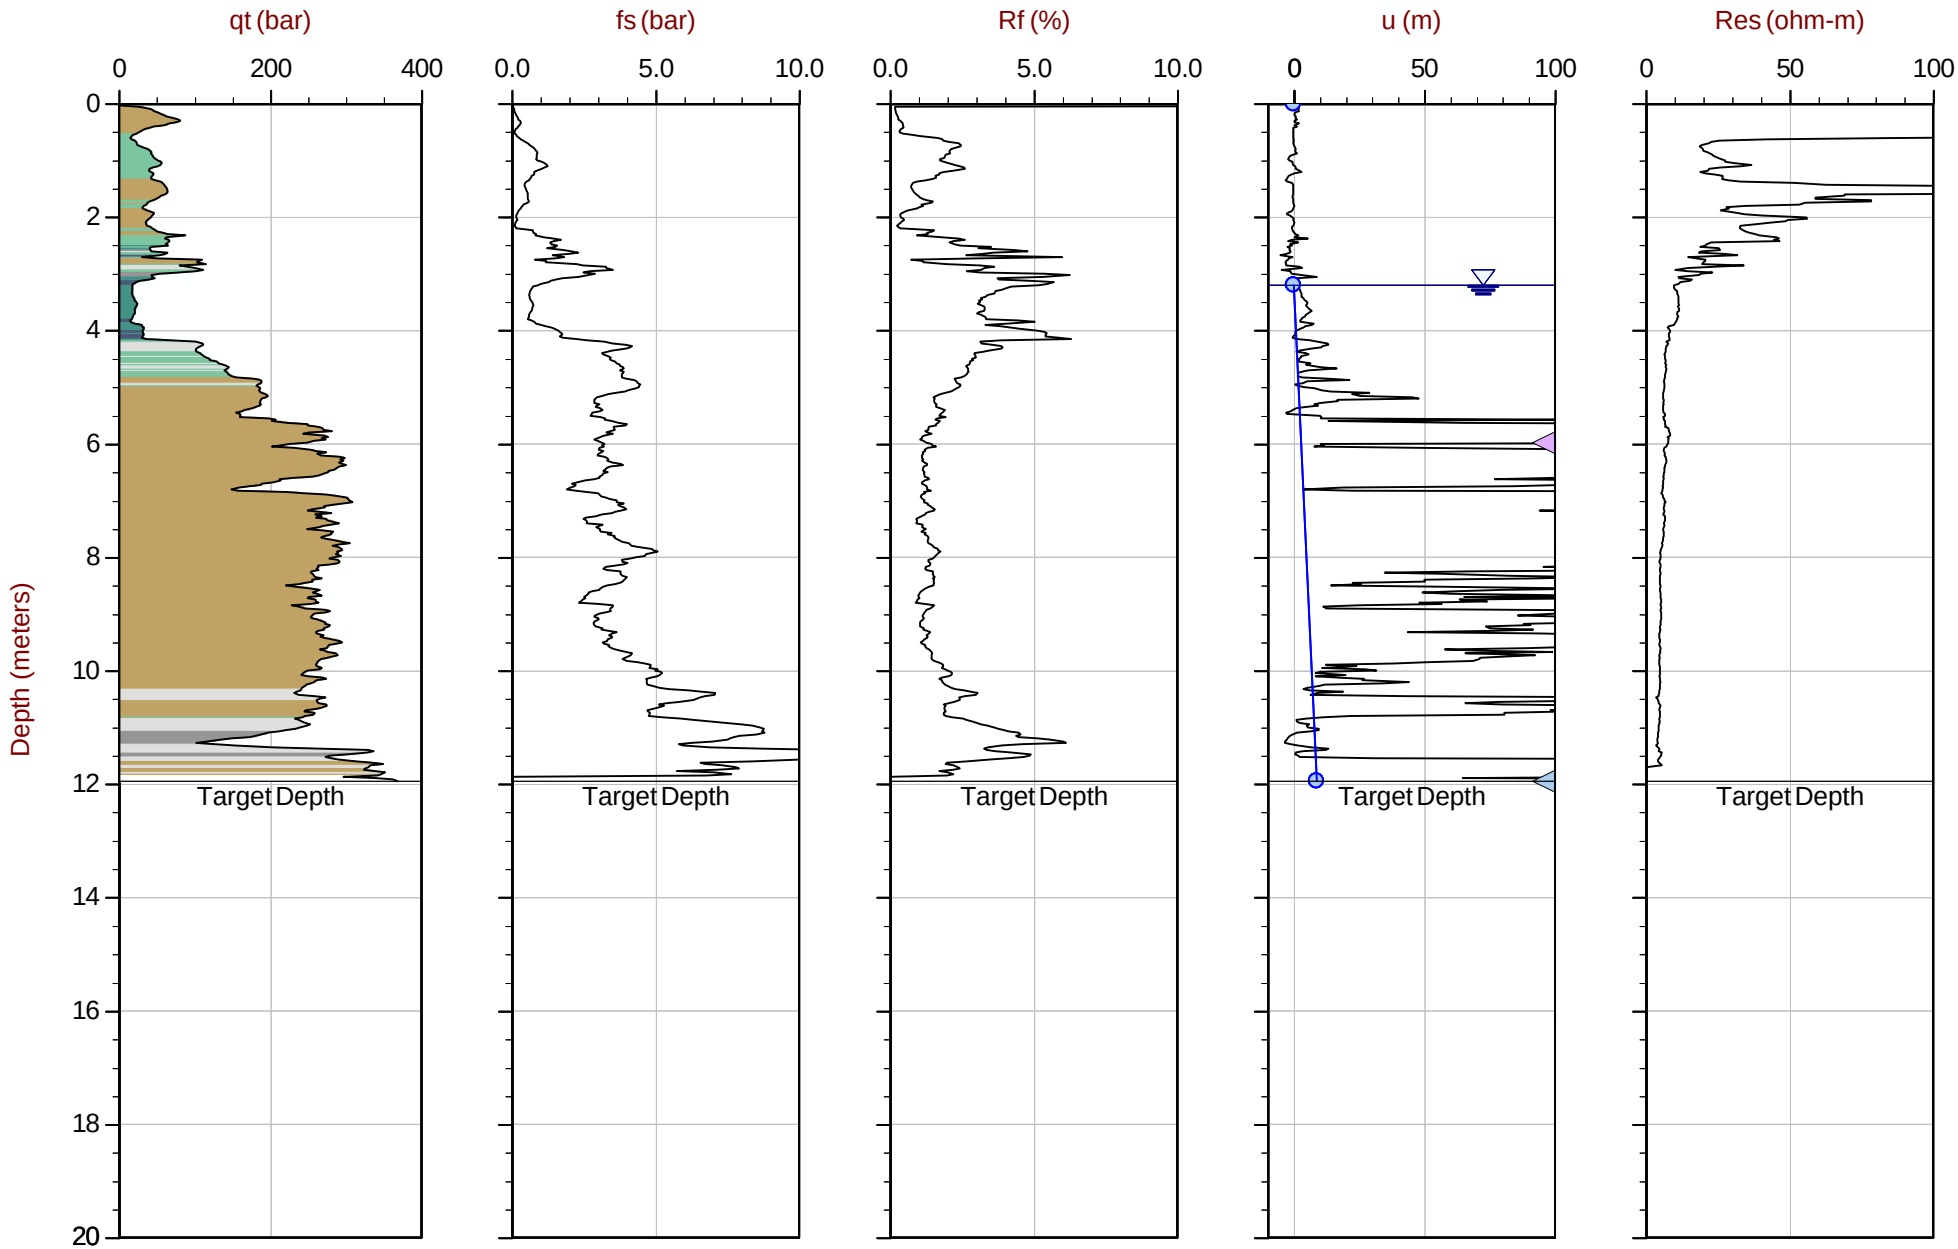

Max Depth: 11.950 m / 39.21 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT240.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610505m E: 416854m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 11:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT241
Cone: 854:T1500F15U35 Area= 15cm2

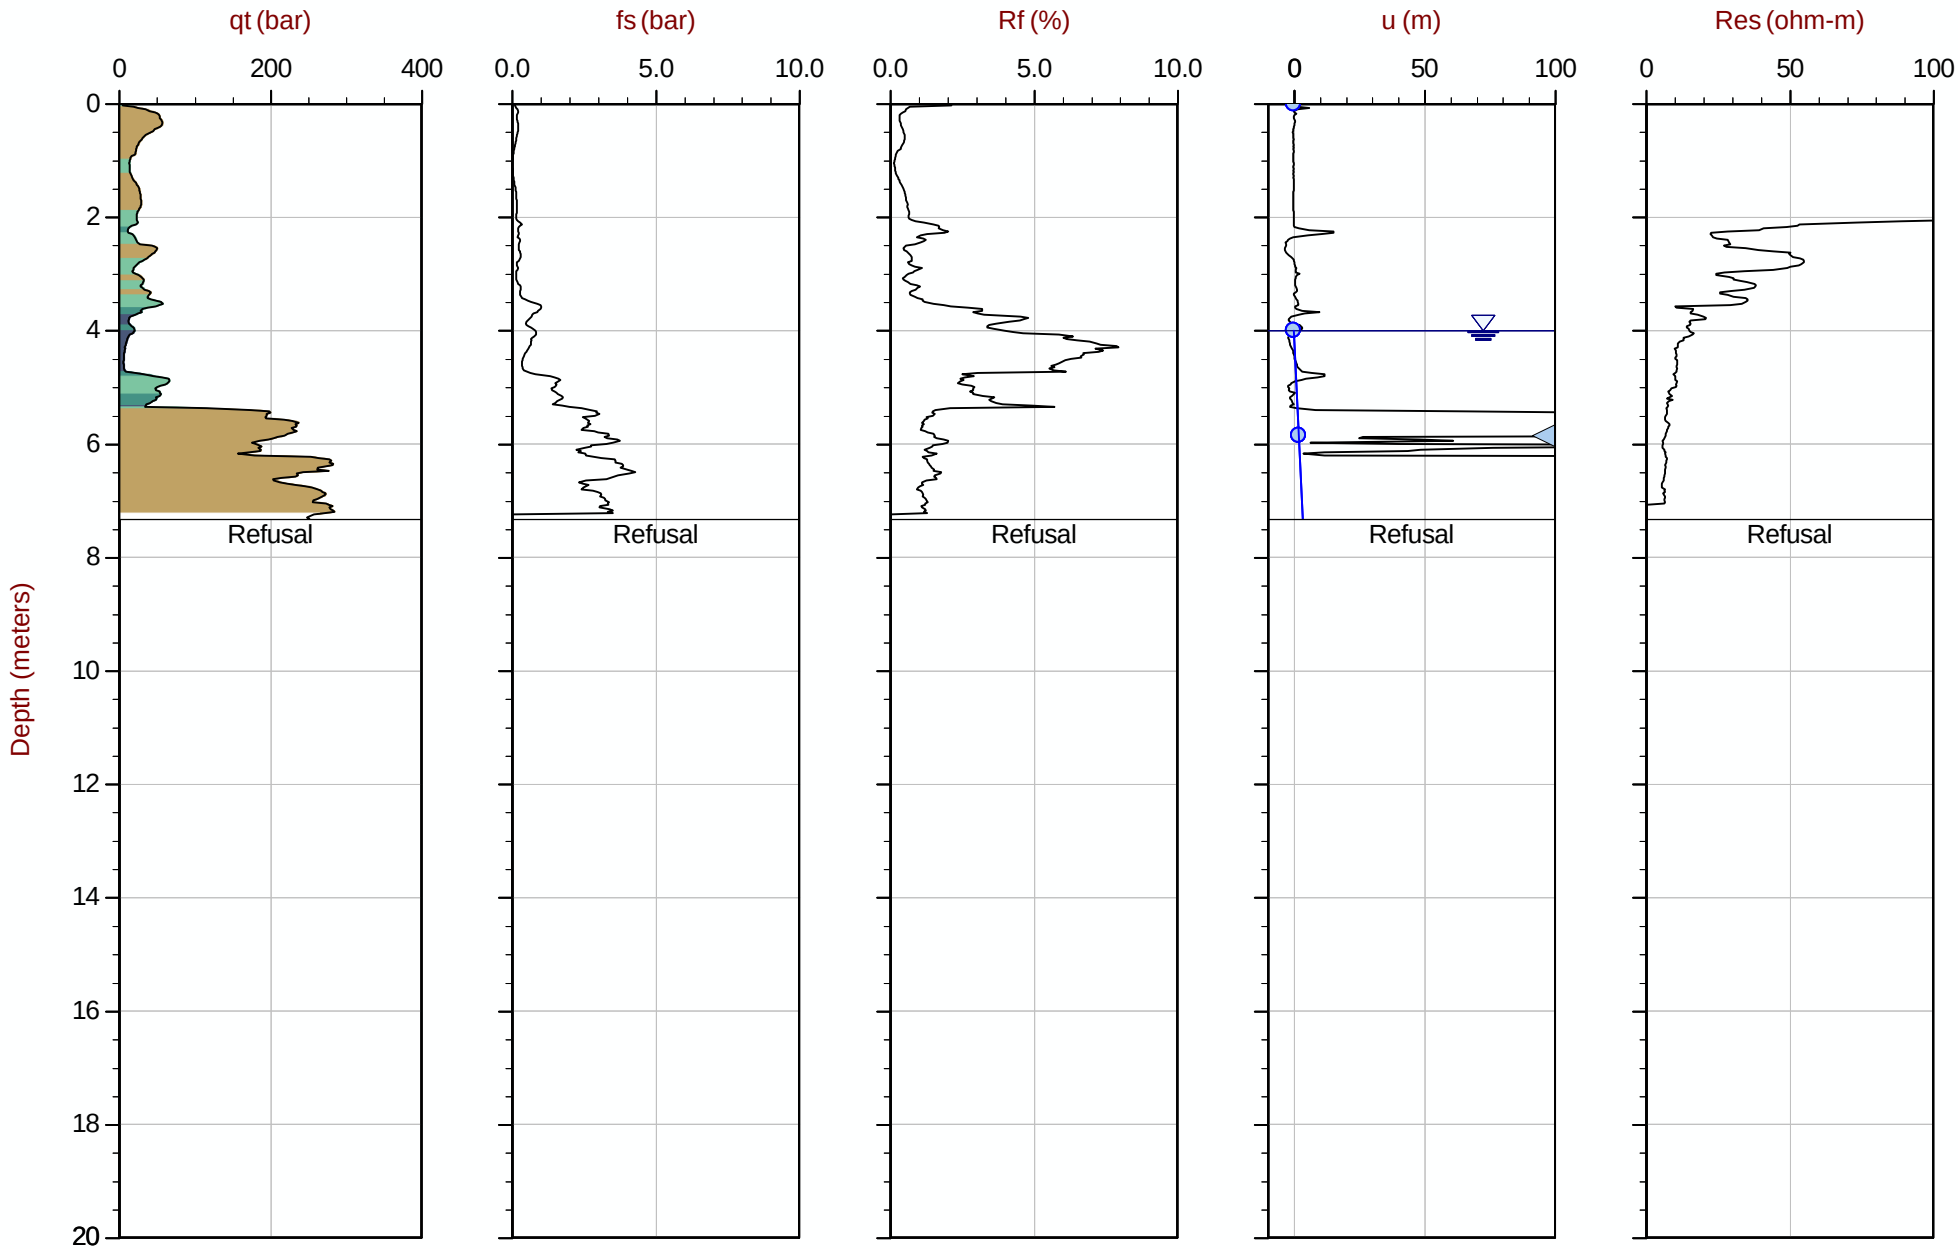

Max Depth: 7.325 m / 24.03 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT241.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610457m E: 416853m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 12:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT242
Cone: 854:T1500F15U35 Area= 15cm2

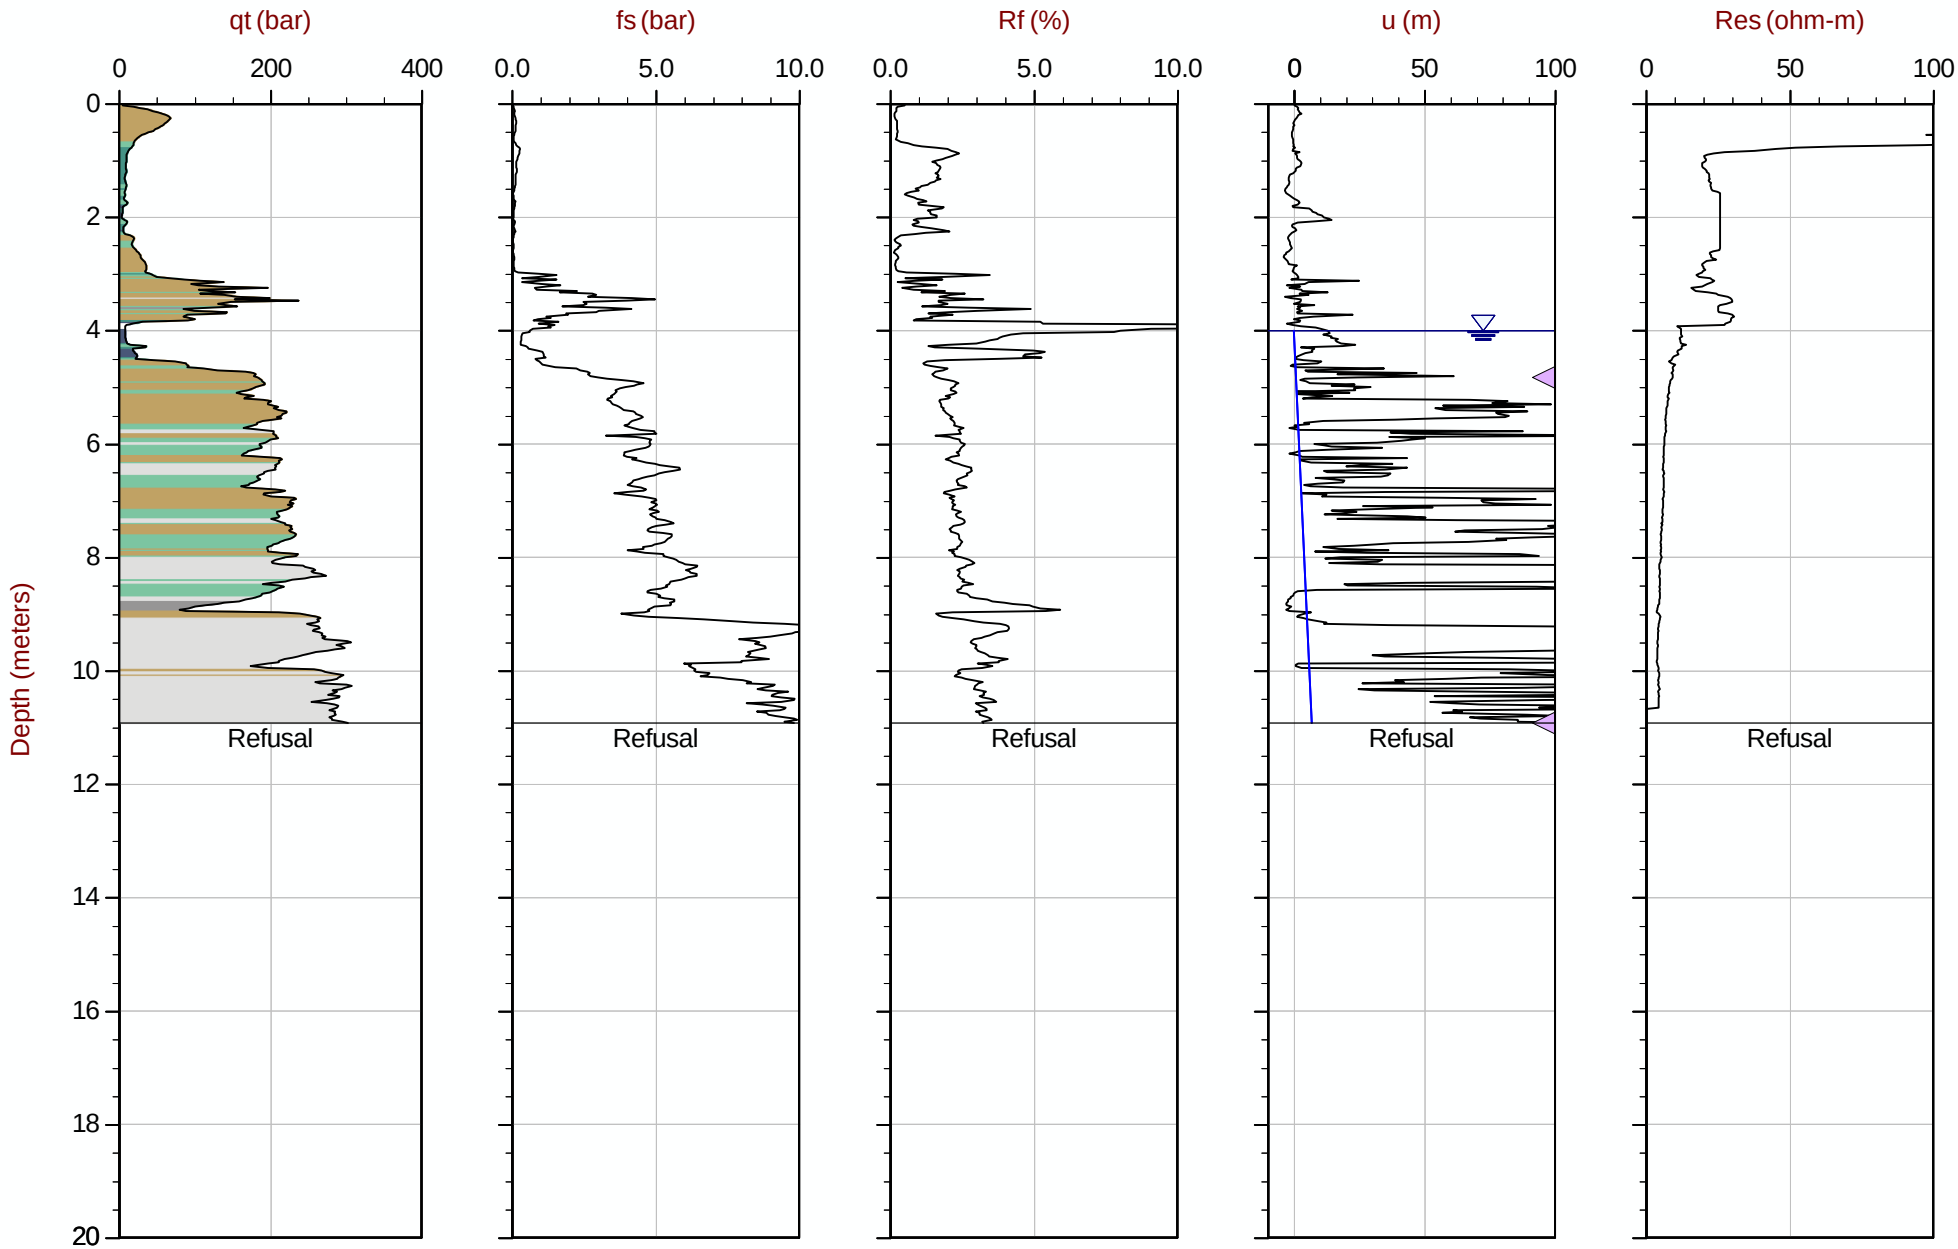

Max Depth: 10.925 m / 35.84 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT242.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610403m E: 416852m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 13:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT243
Cone: 854:T1500F15U35 Area= 15cm2

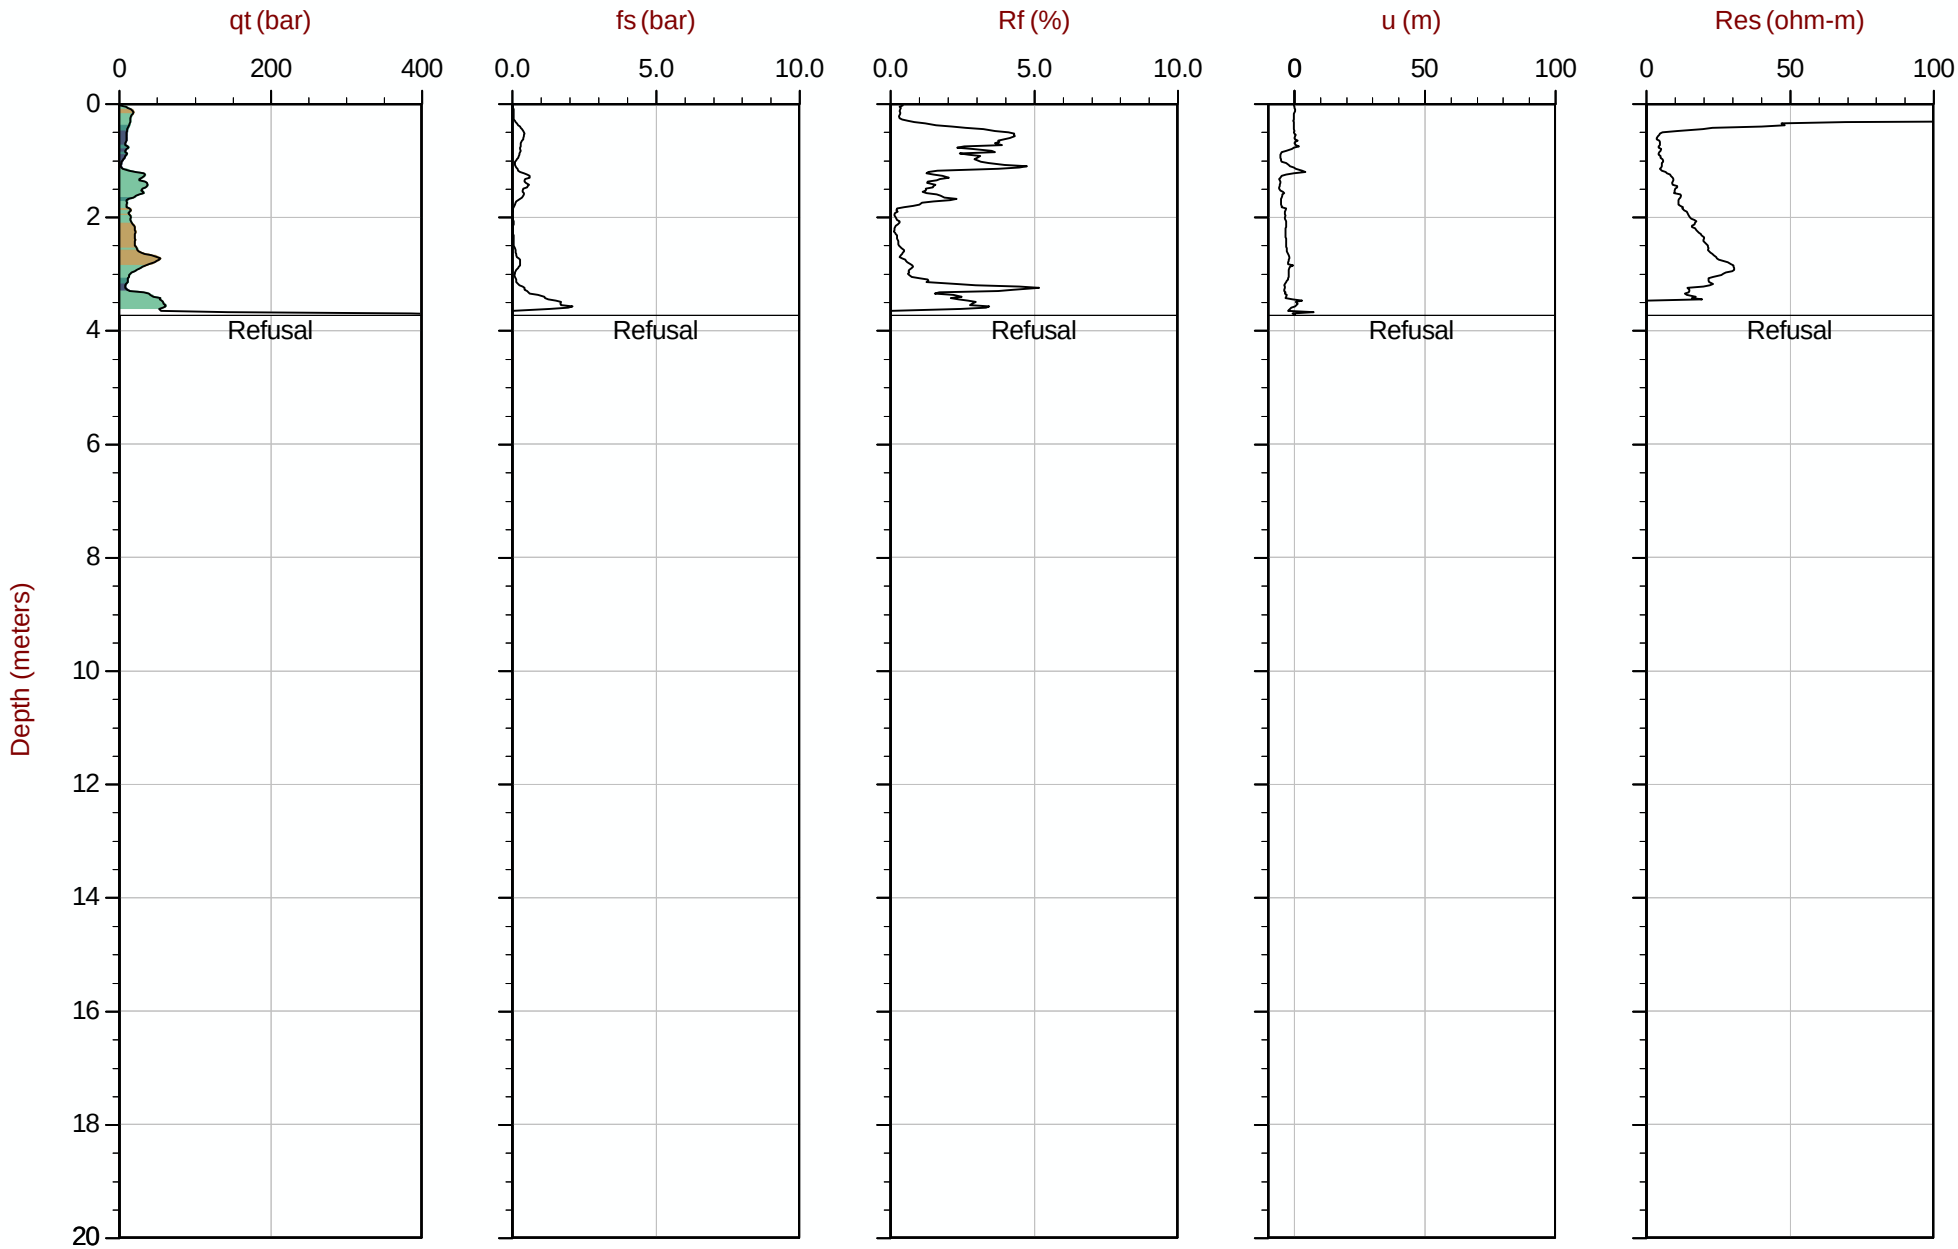

Max Depth: 3.725 m / 12.22 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT243.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610358m E: 416850m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT243A
Cone: 854:T1500F15U35 Area= 15cm2

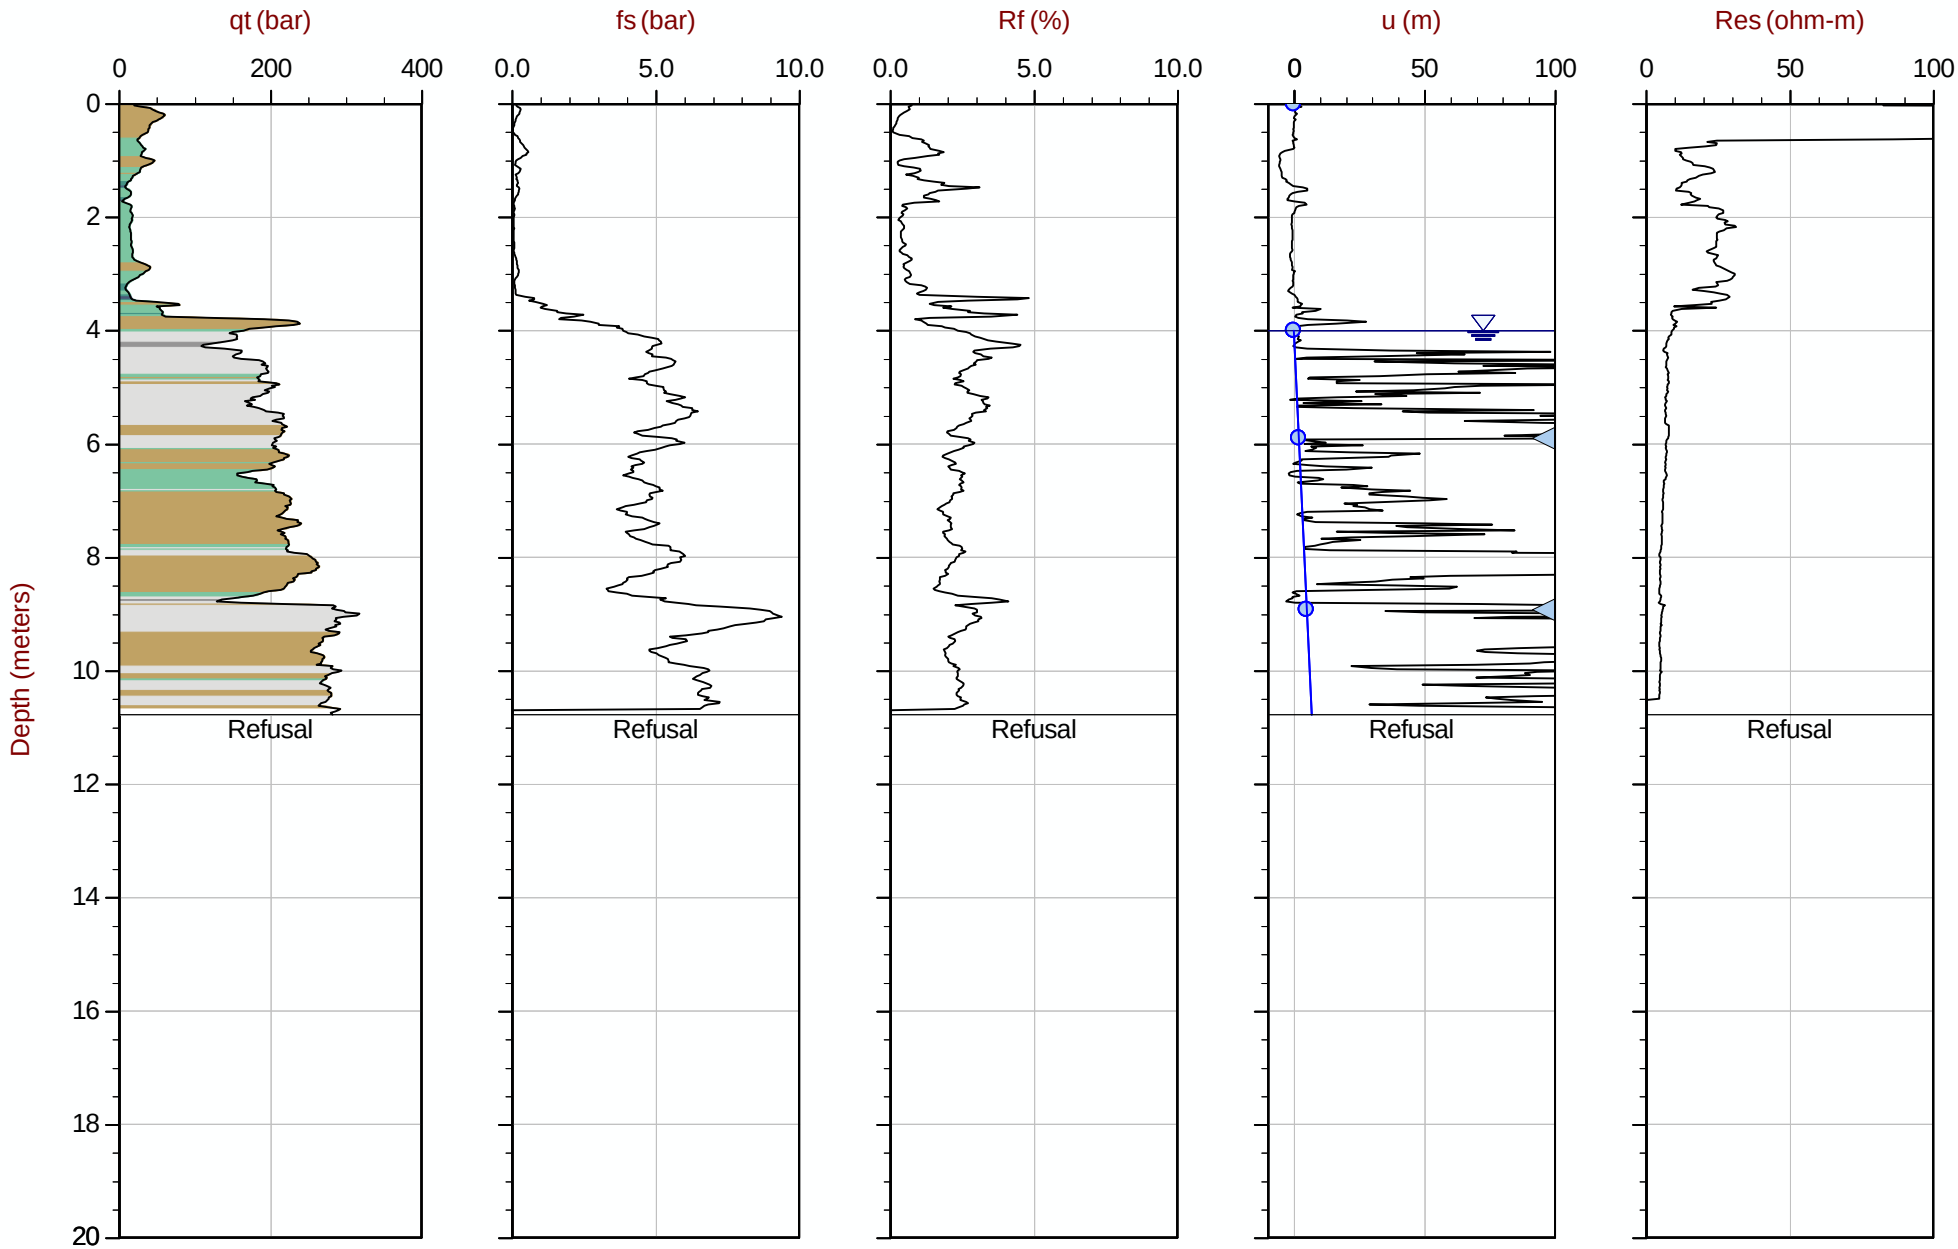

Max Depth: 10.775 m / 35.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT243A.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610358m E: 416850m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 15:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT244
Cone: 854:T1500F15U35 Area= 15cm2

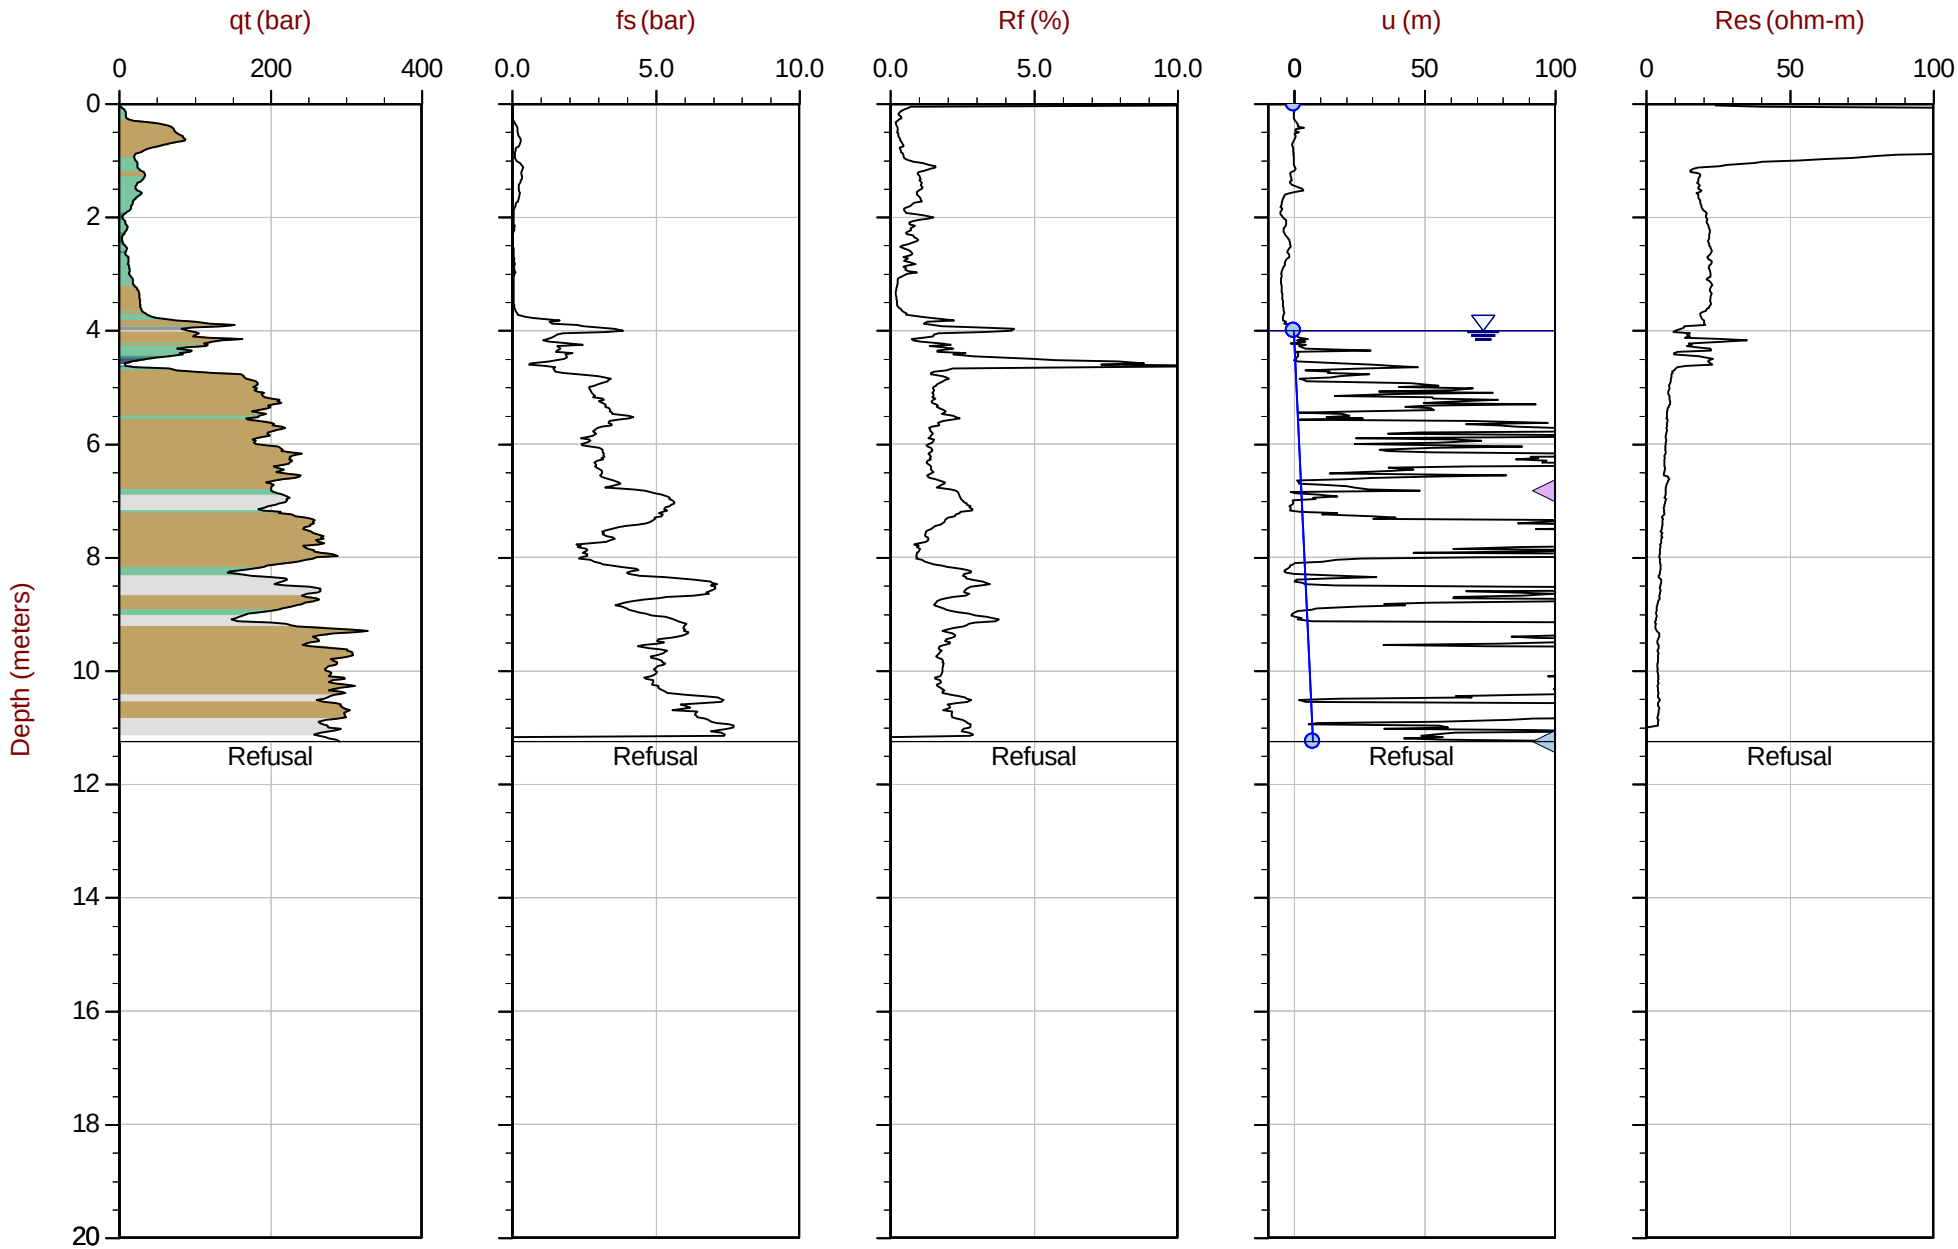

Max Depth: 11.250 m / 36.91 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT244.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610306m E: 416849m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 17:12
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT245
Cone: 854:T1500F15U35 Area= 15cm2

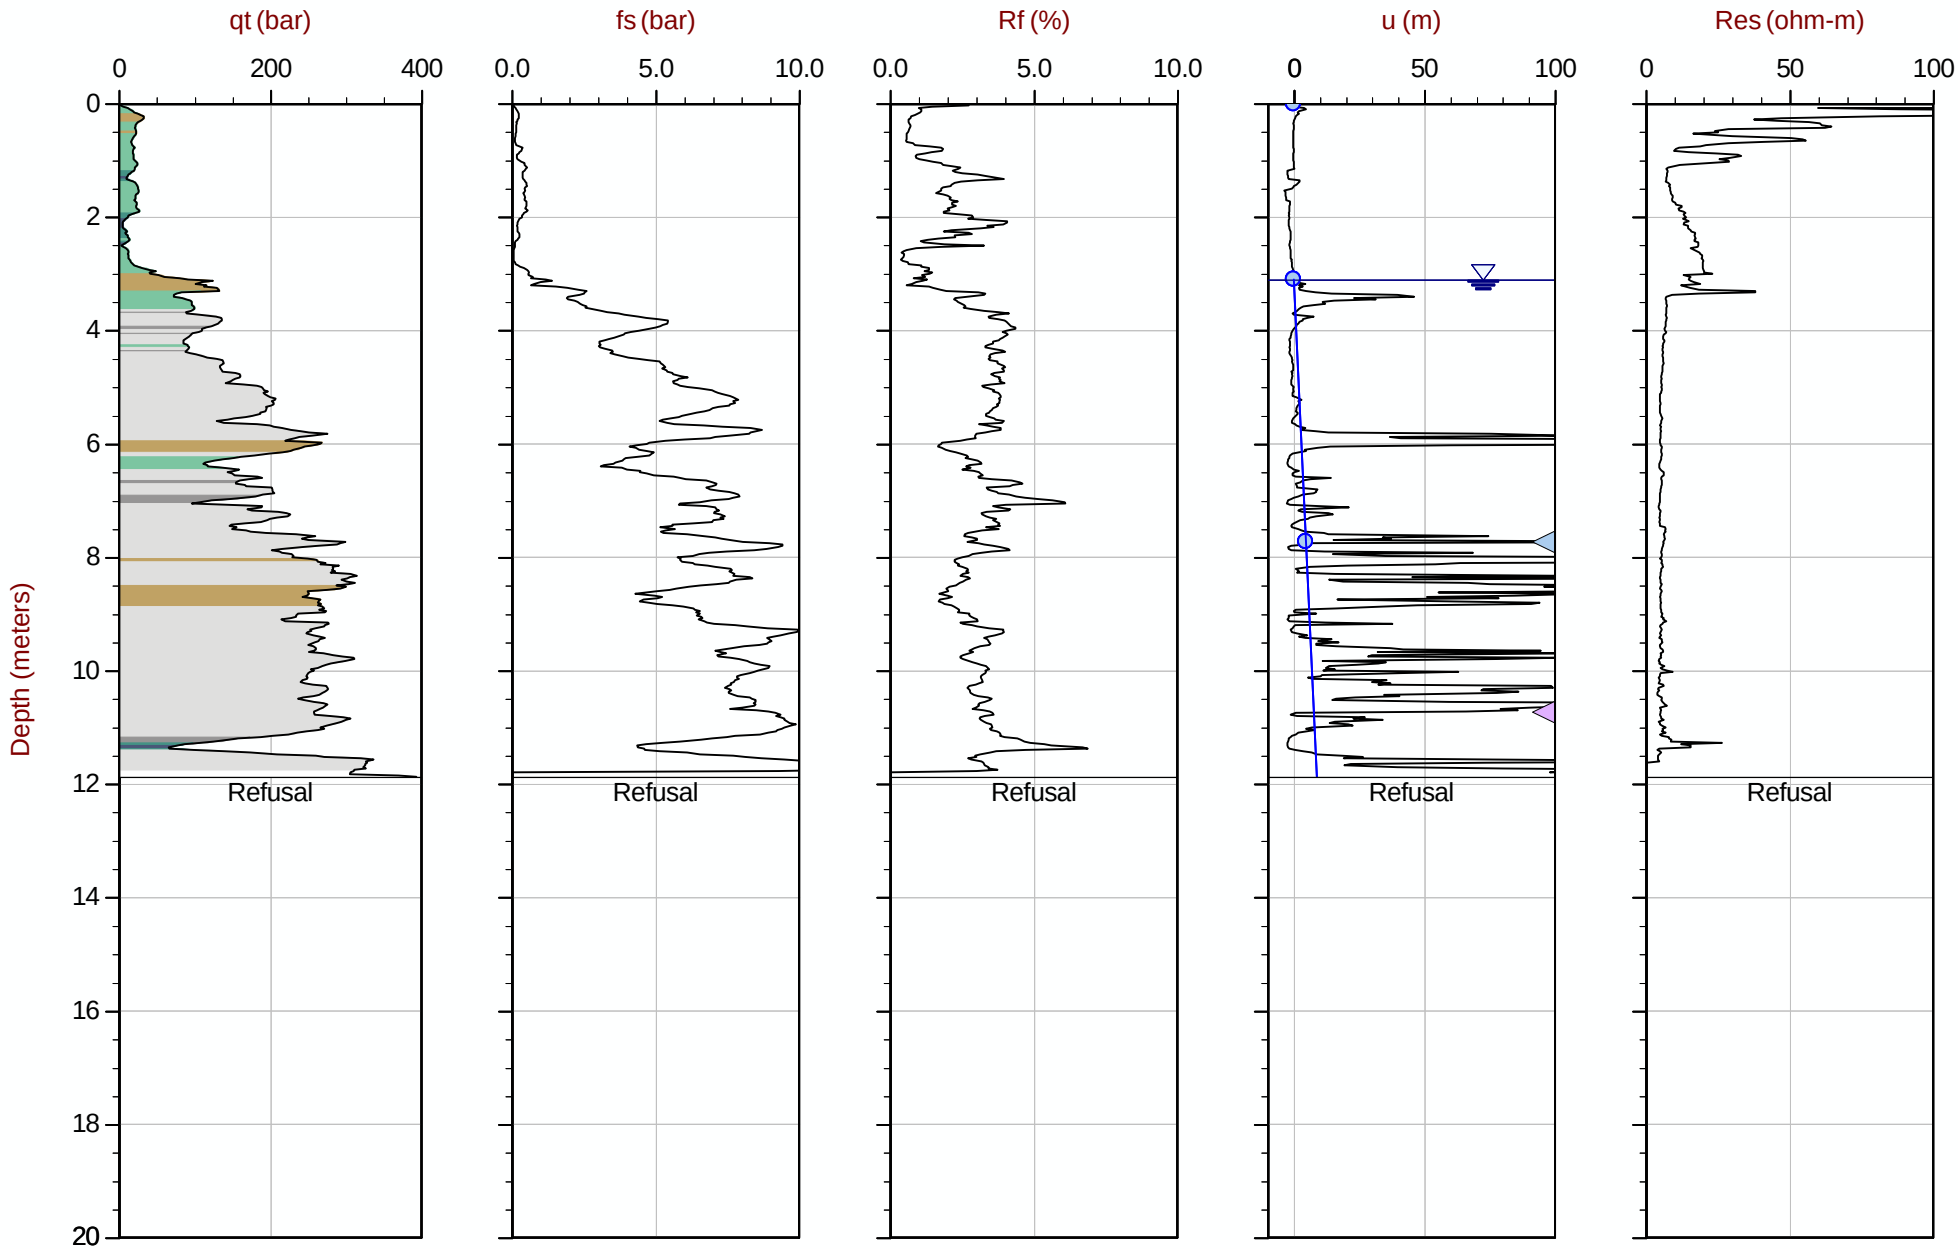

Max Depth: 11.875 m / 38.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT245.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610257m E: 416848m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 13:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT246
Cone: 854:T1500F15U35 Area= 15cm2

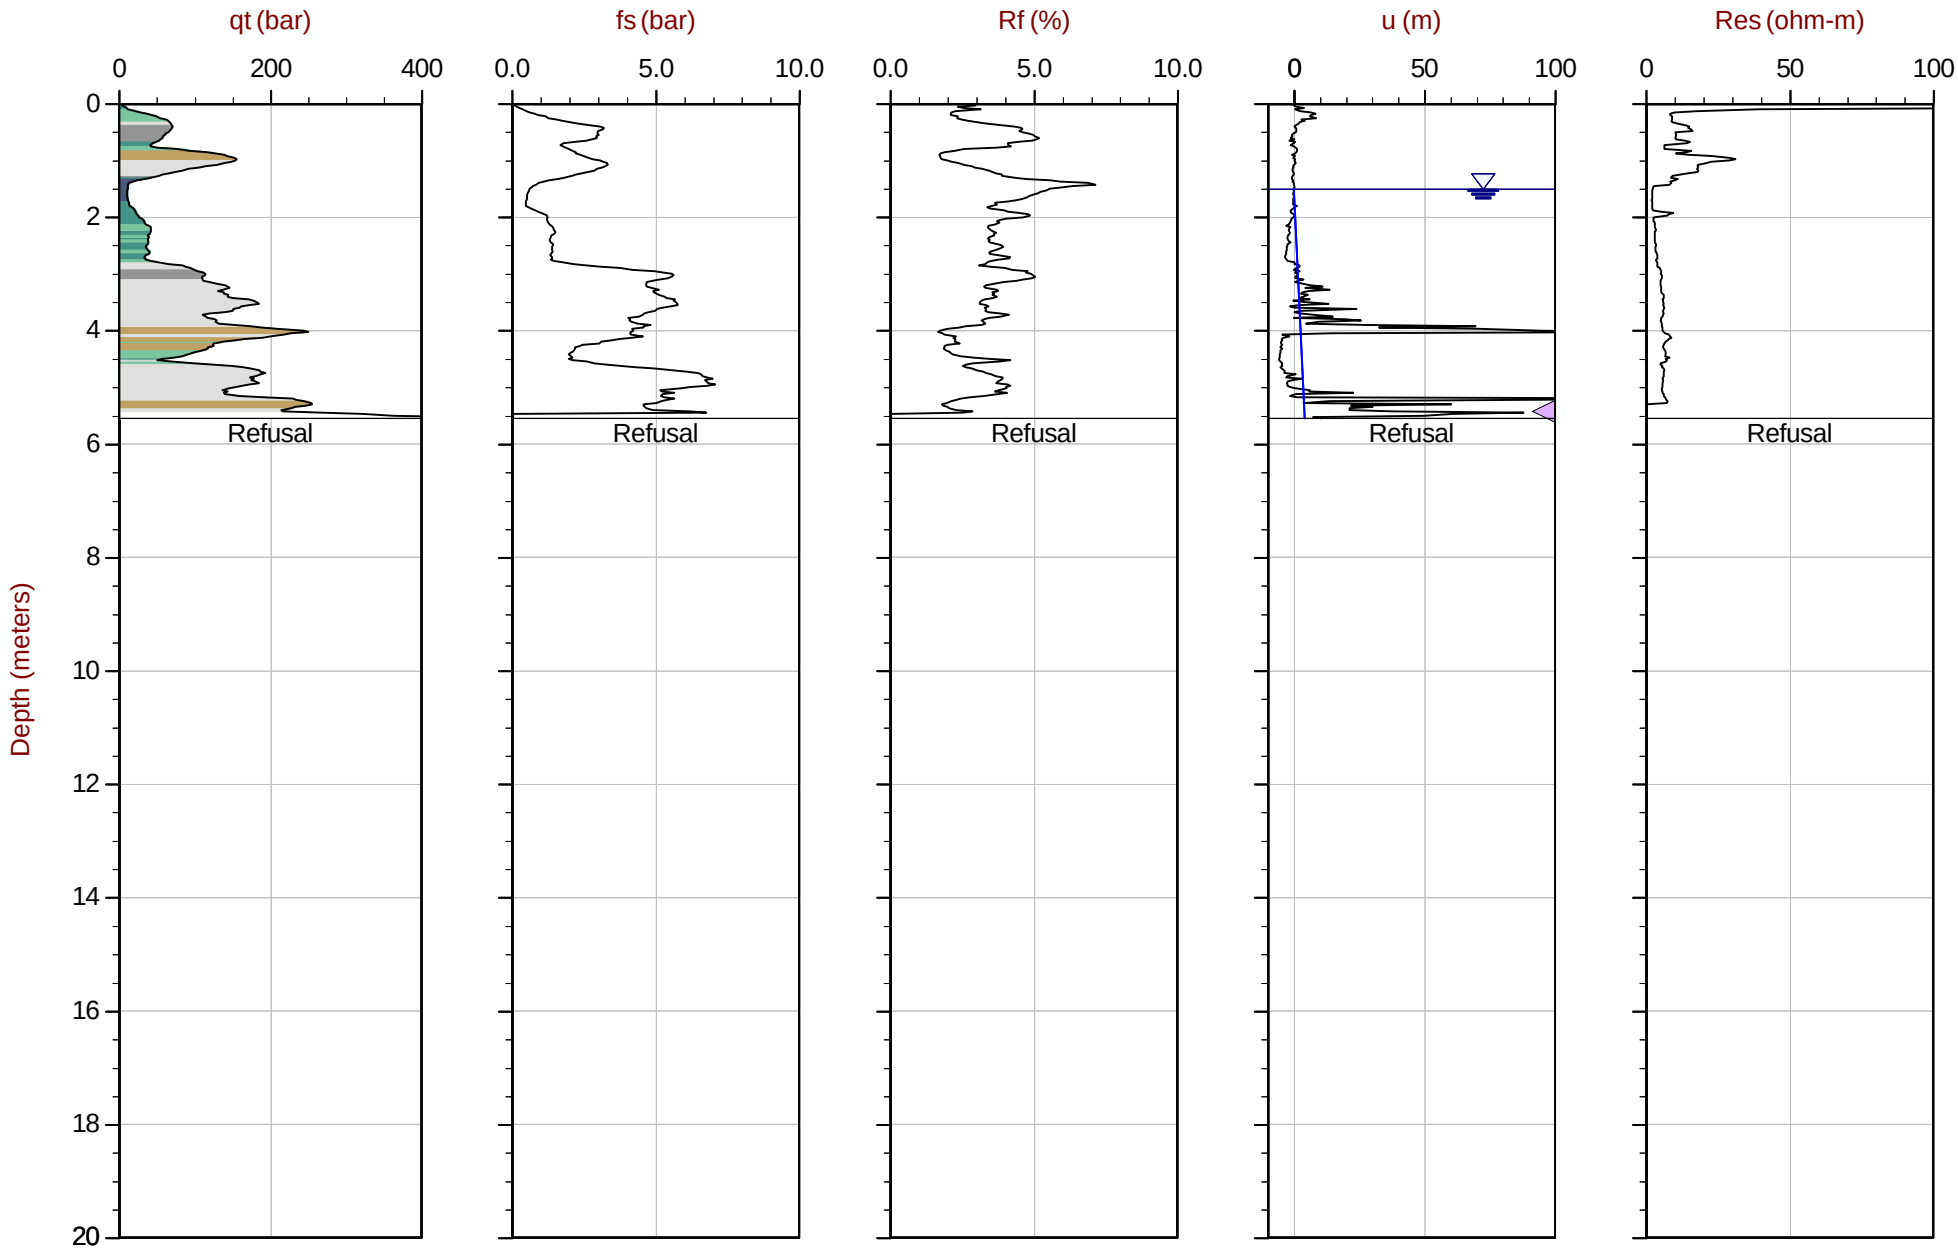

Max Depth: 5.550 m / 18.21 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT246.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610206m E: 416846m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 06:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT247
Cone: 854:T1500F15U35 Area= 15cm2

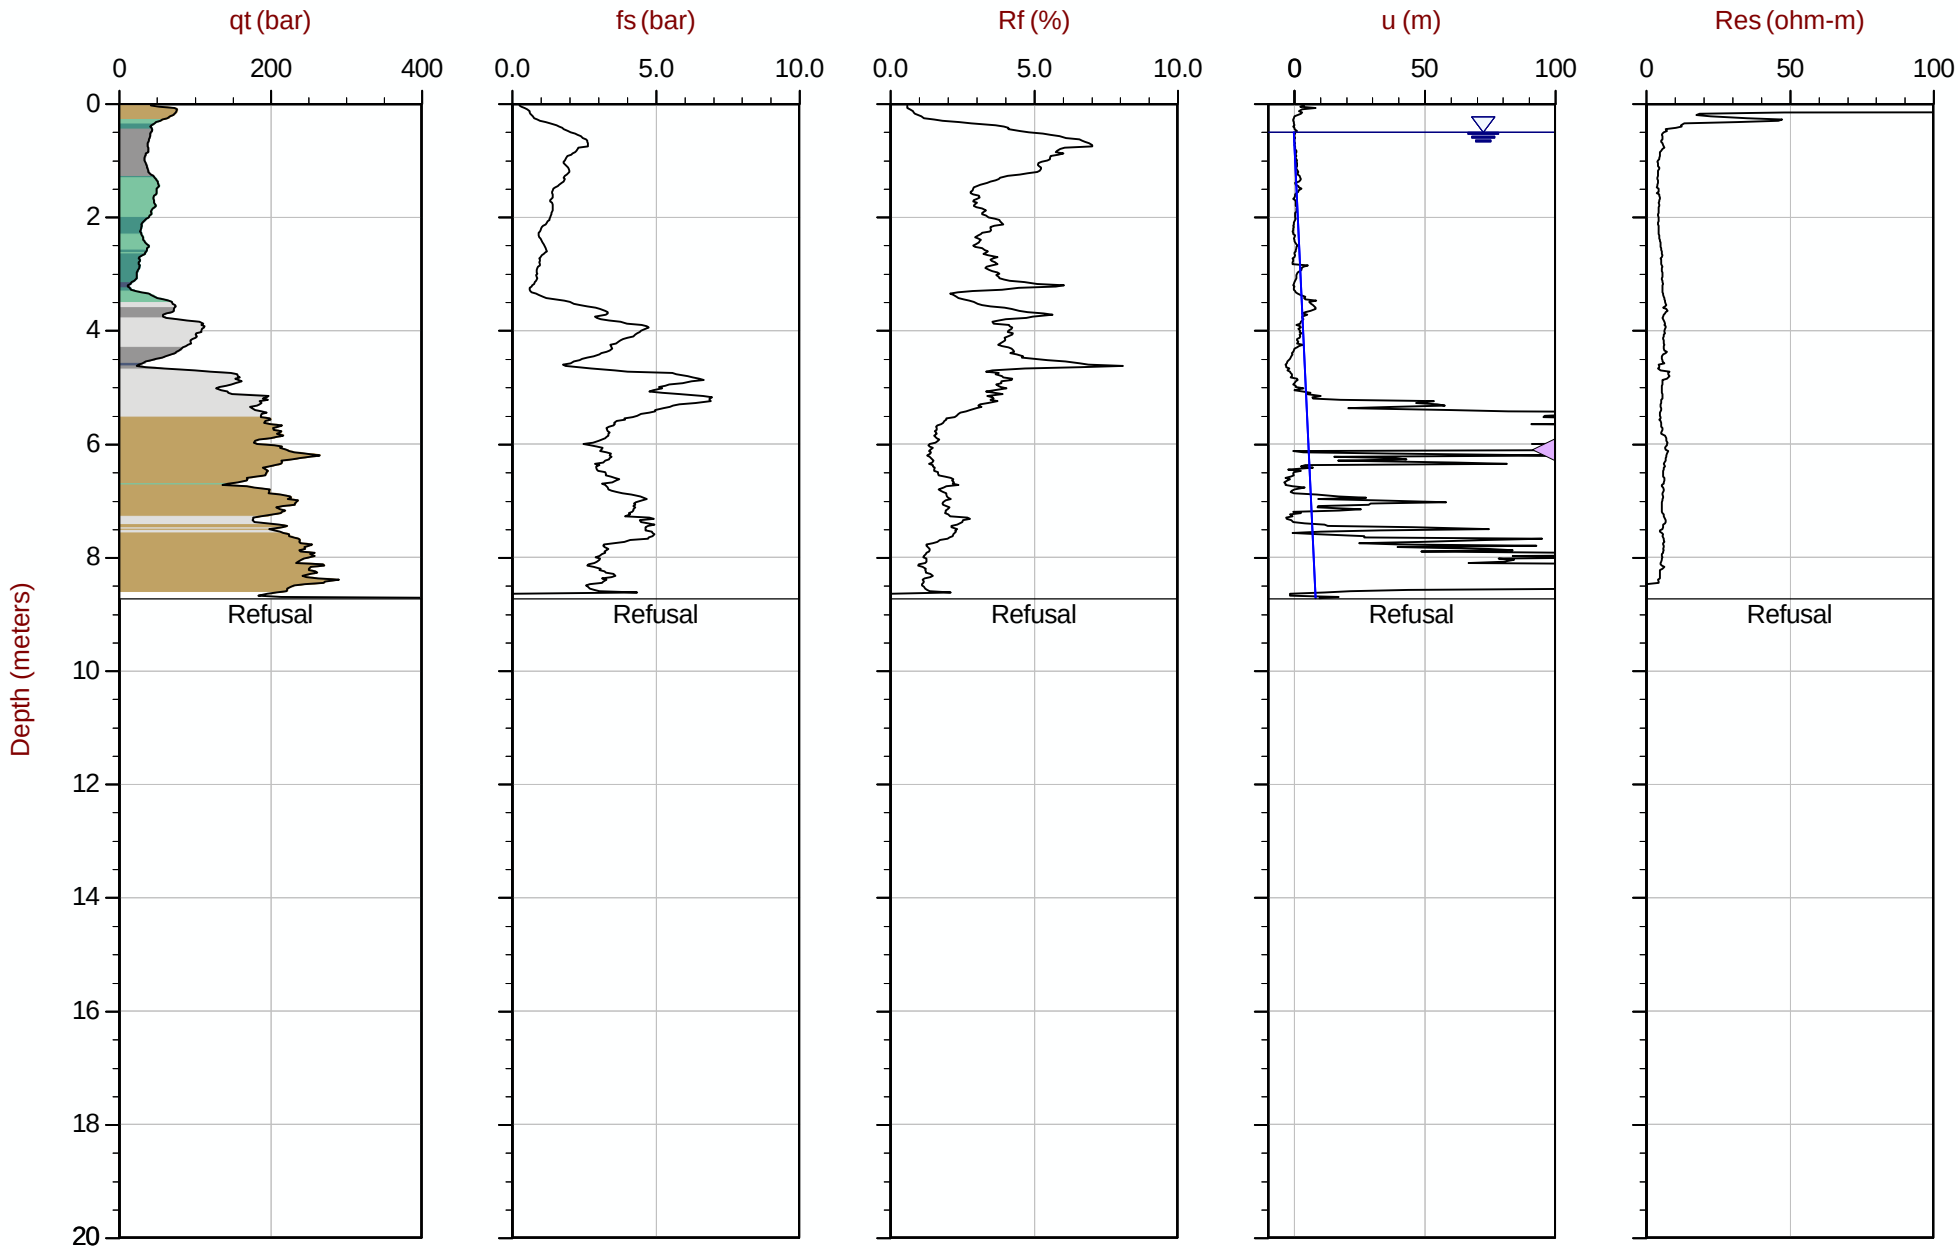

Max Depth: 8.725 m / 28.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT247.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610158m E: 416845m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 08:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT248
Cone: 854:T1500F15U35 Area= 15cm2

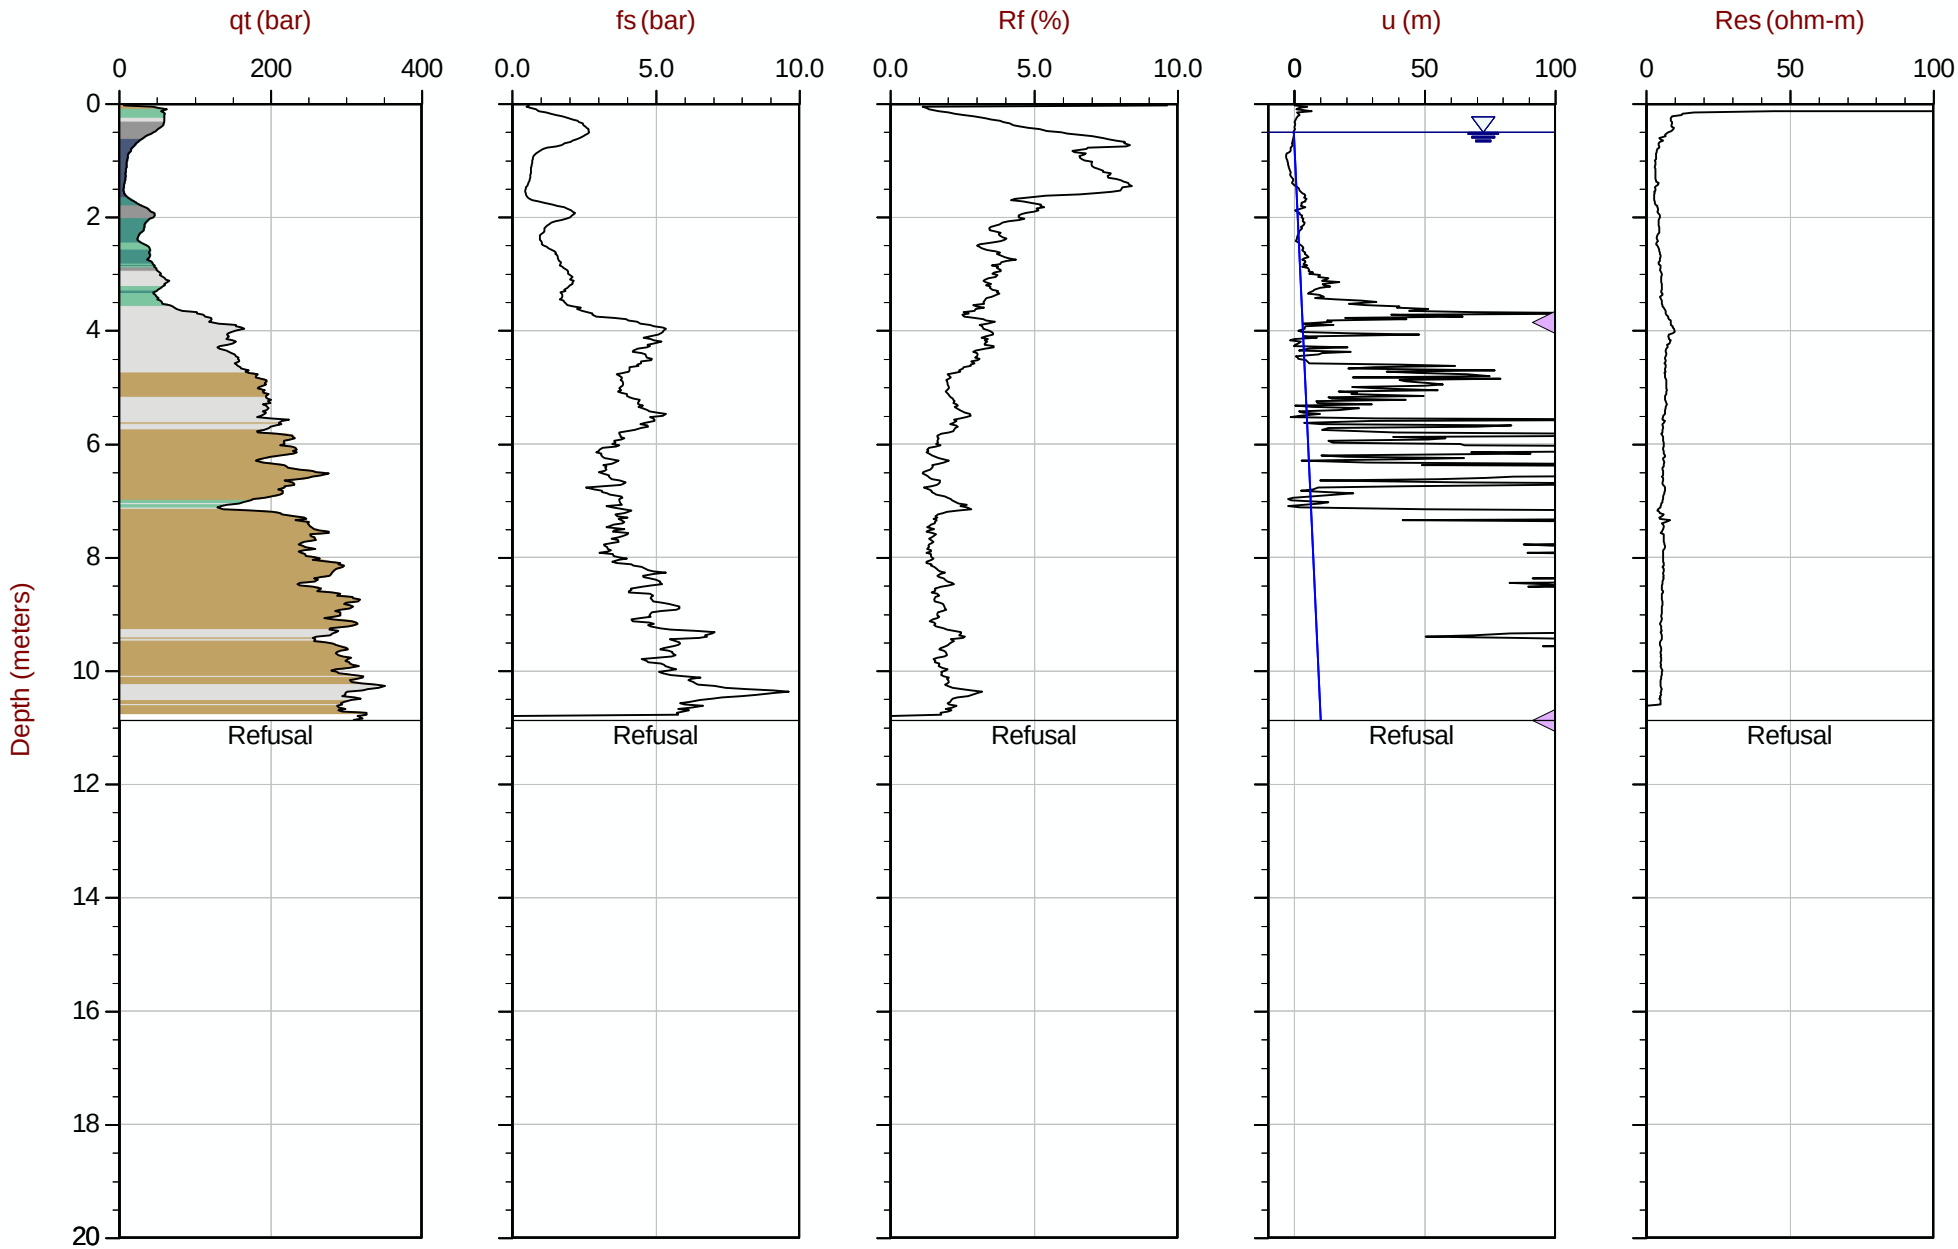

Max Depth: 10.875 m / 35.68 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT248.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610104m E: 416844m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 11:28
Site: Brooks, Alberta

Sounding: RCPT22-22CPT249
Cone: 854:T1500F15U35 Area= 15cm2

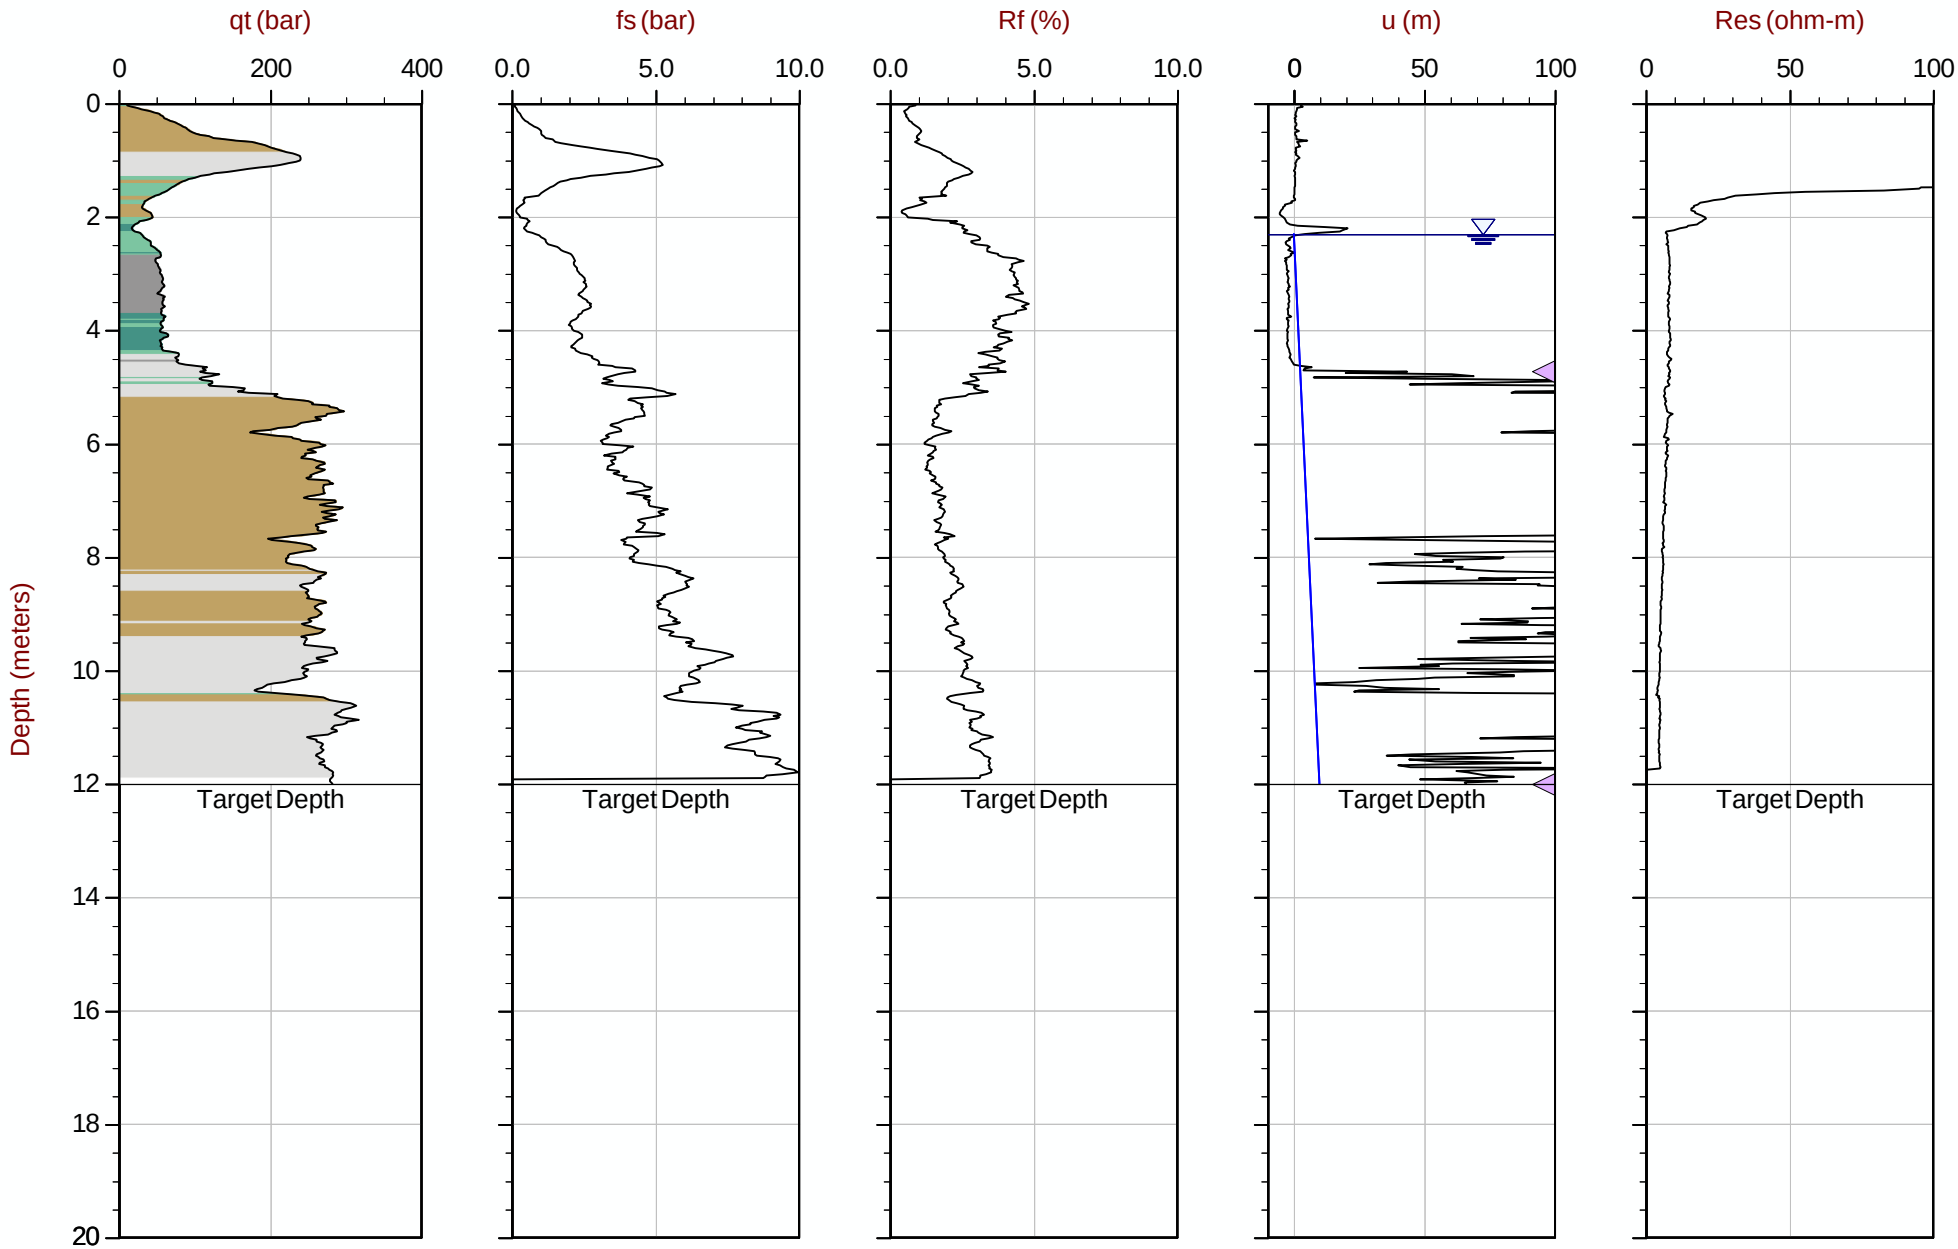

Max Depth: 12.000 m / 39.37 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT249.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610060m E: 416844m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 12:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT250
Cone: 854:T1500F15U35 Area= 15cm2

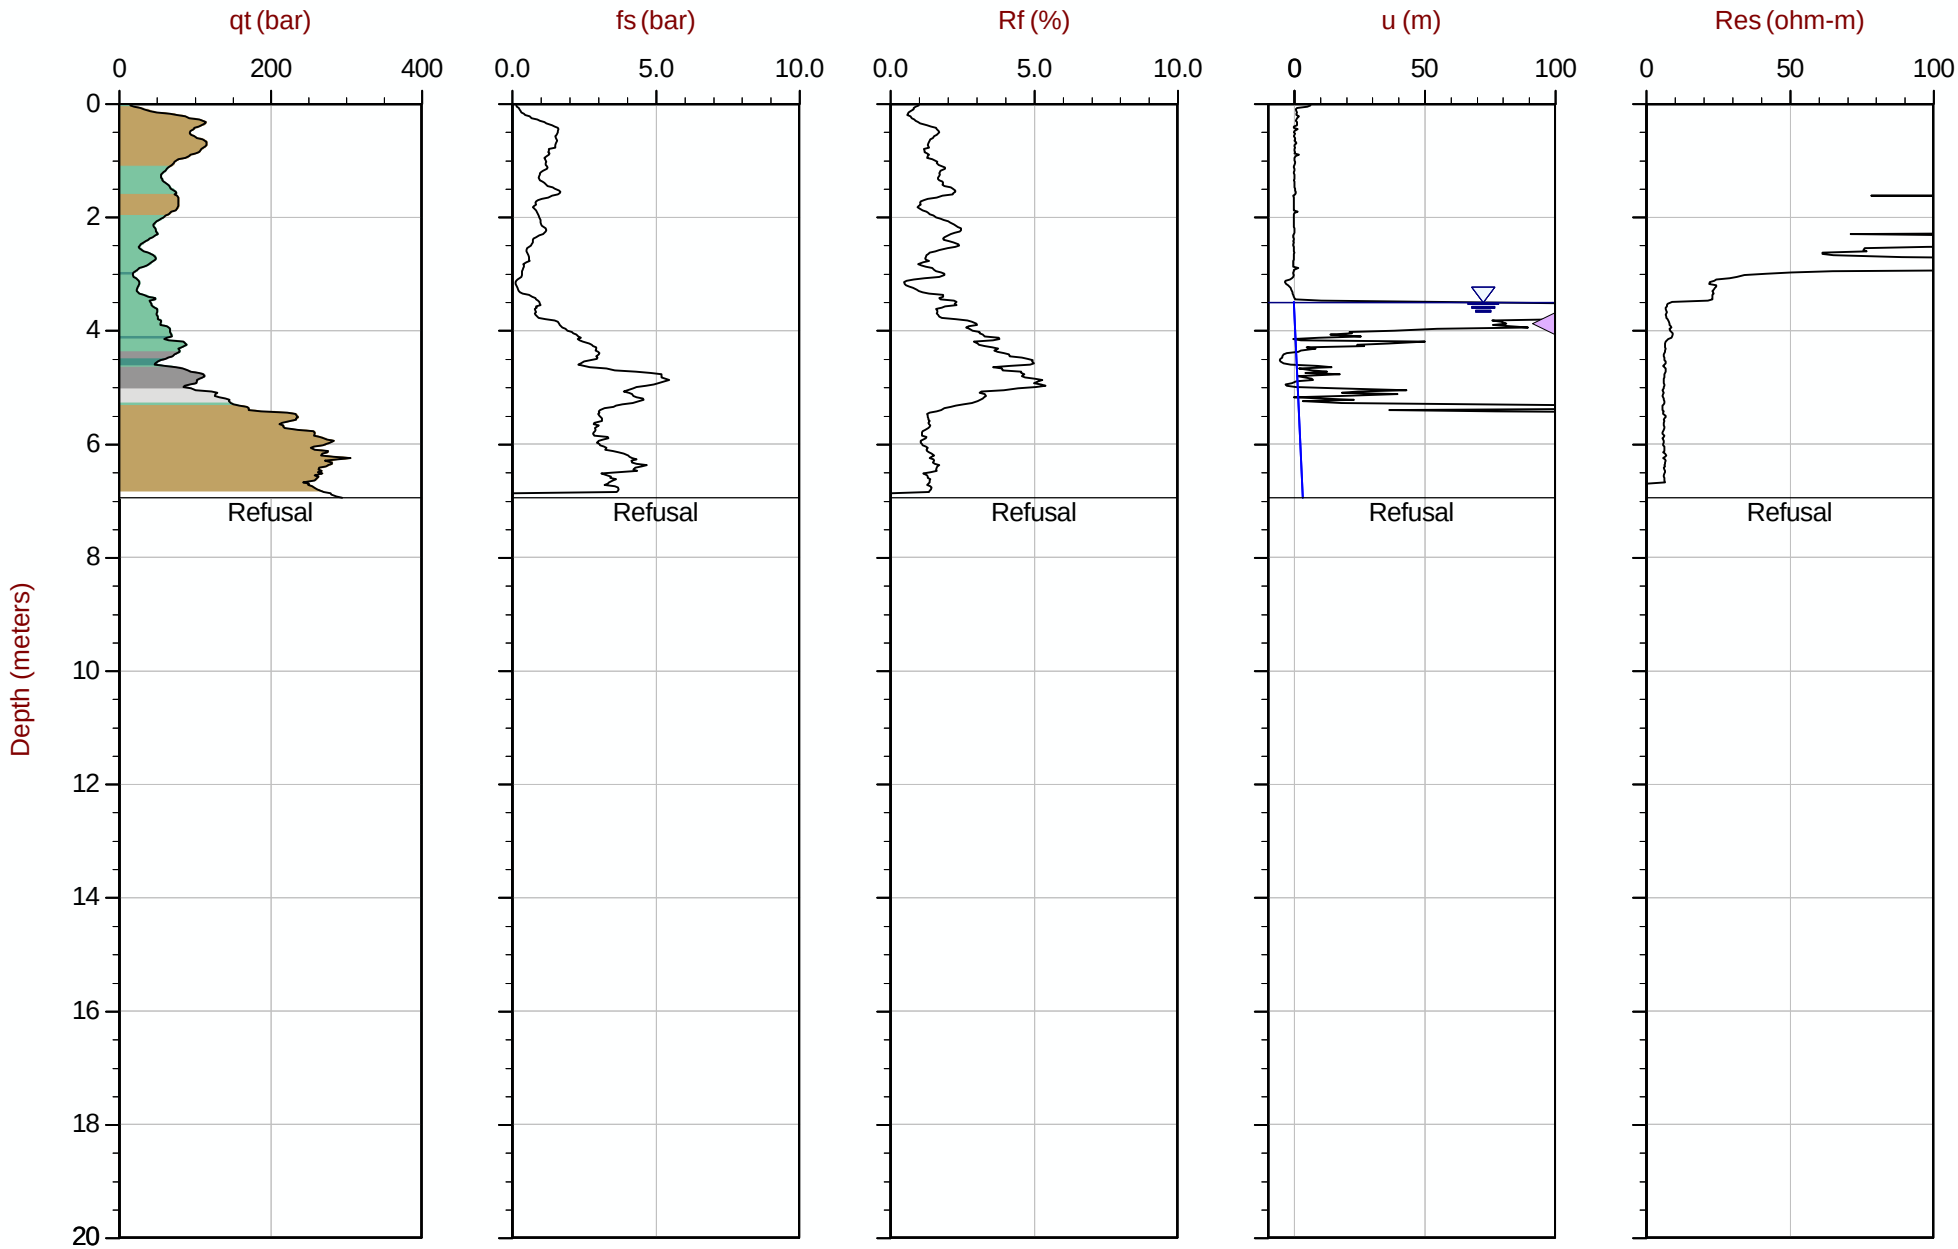

Max Depth: 6.950 m / 22.80 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT250.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610009m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 13:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT251
Cone: 854:T1500F15U35 Area= 15cm2

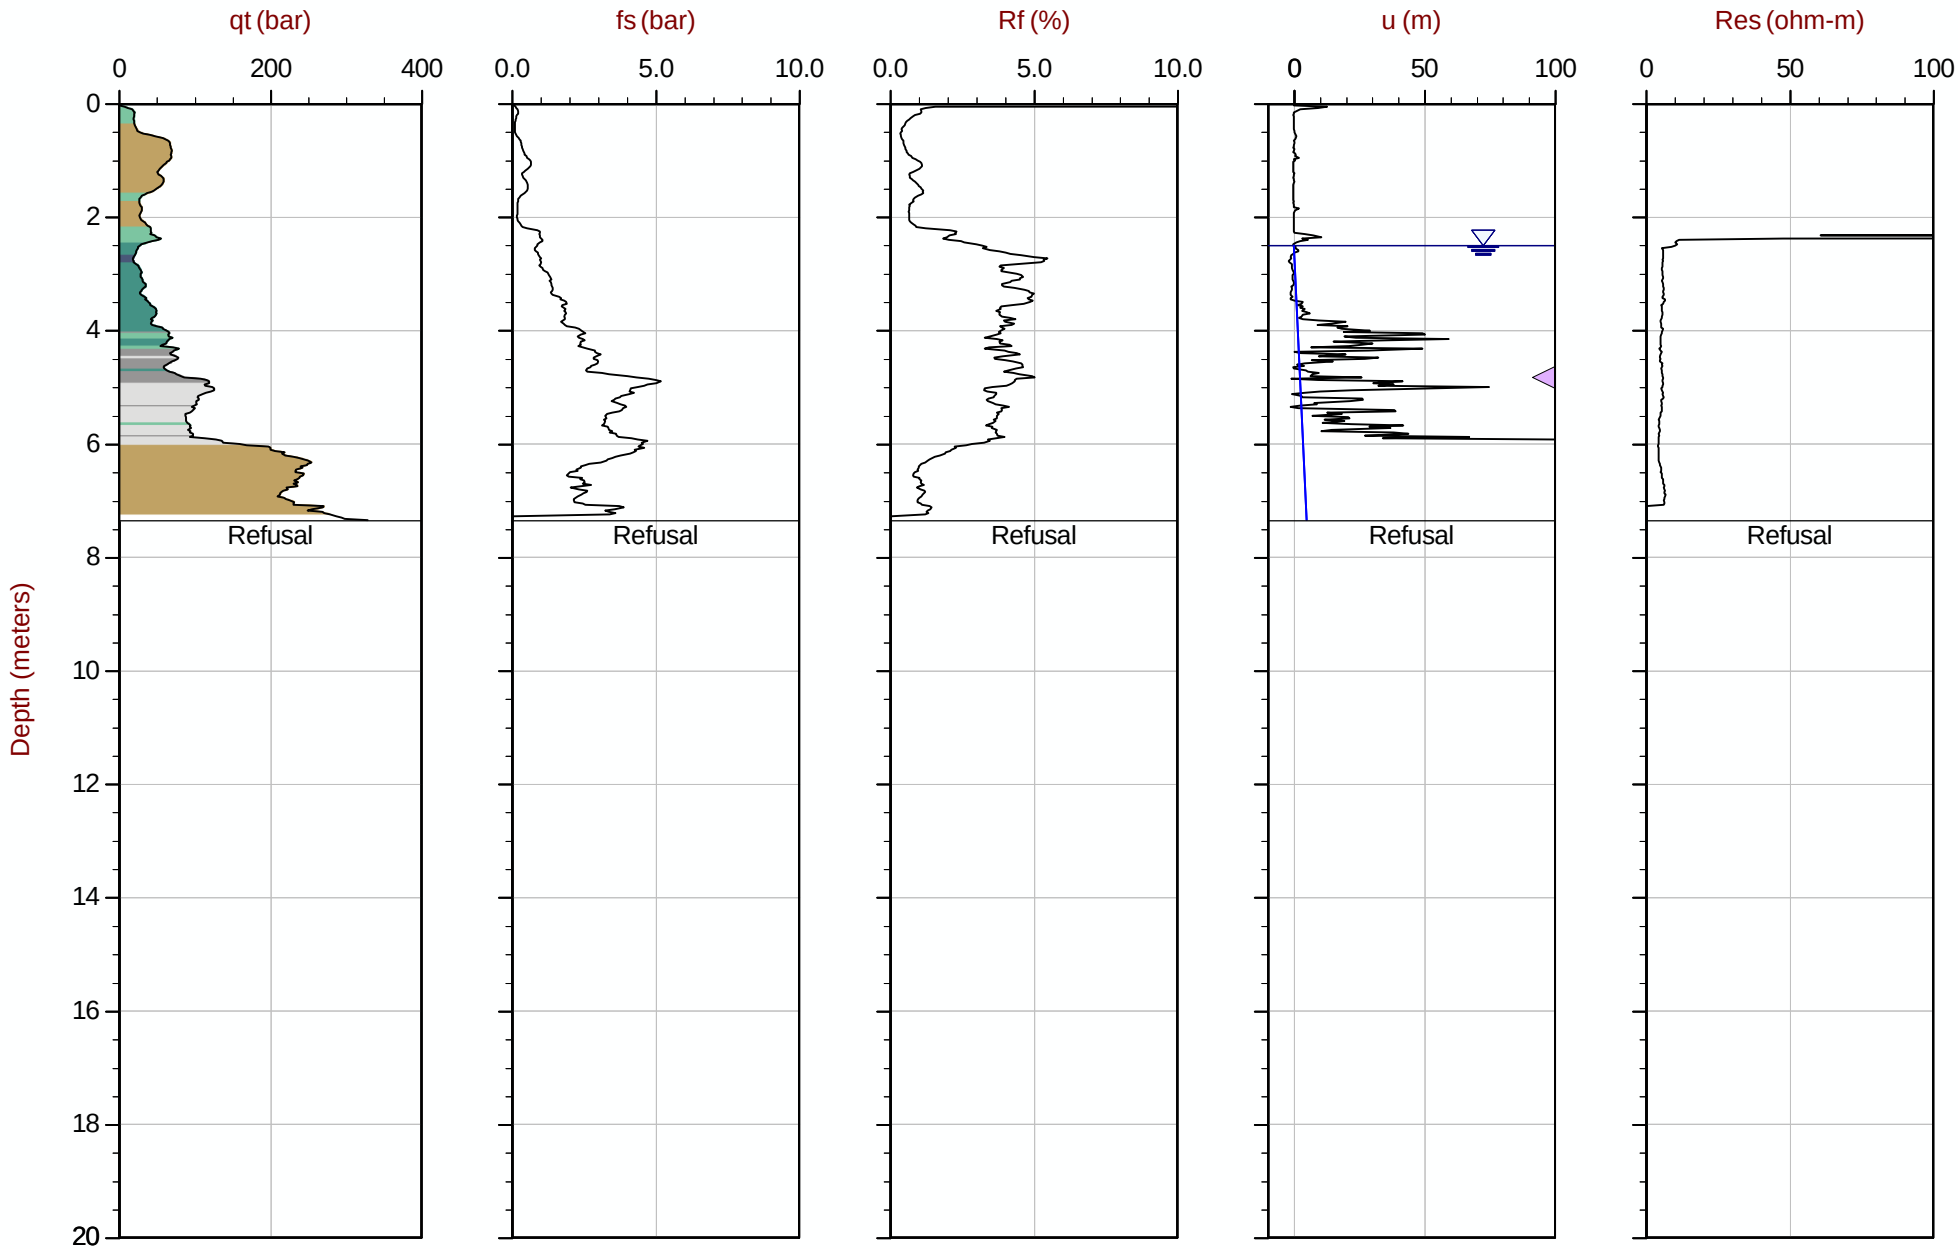

Max Depth: 7.350 m / 24.11 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT251.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609960m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 15:05
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT252
Cone: 854:T1500F15U35 Area= 15cm2

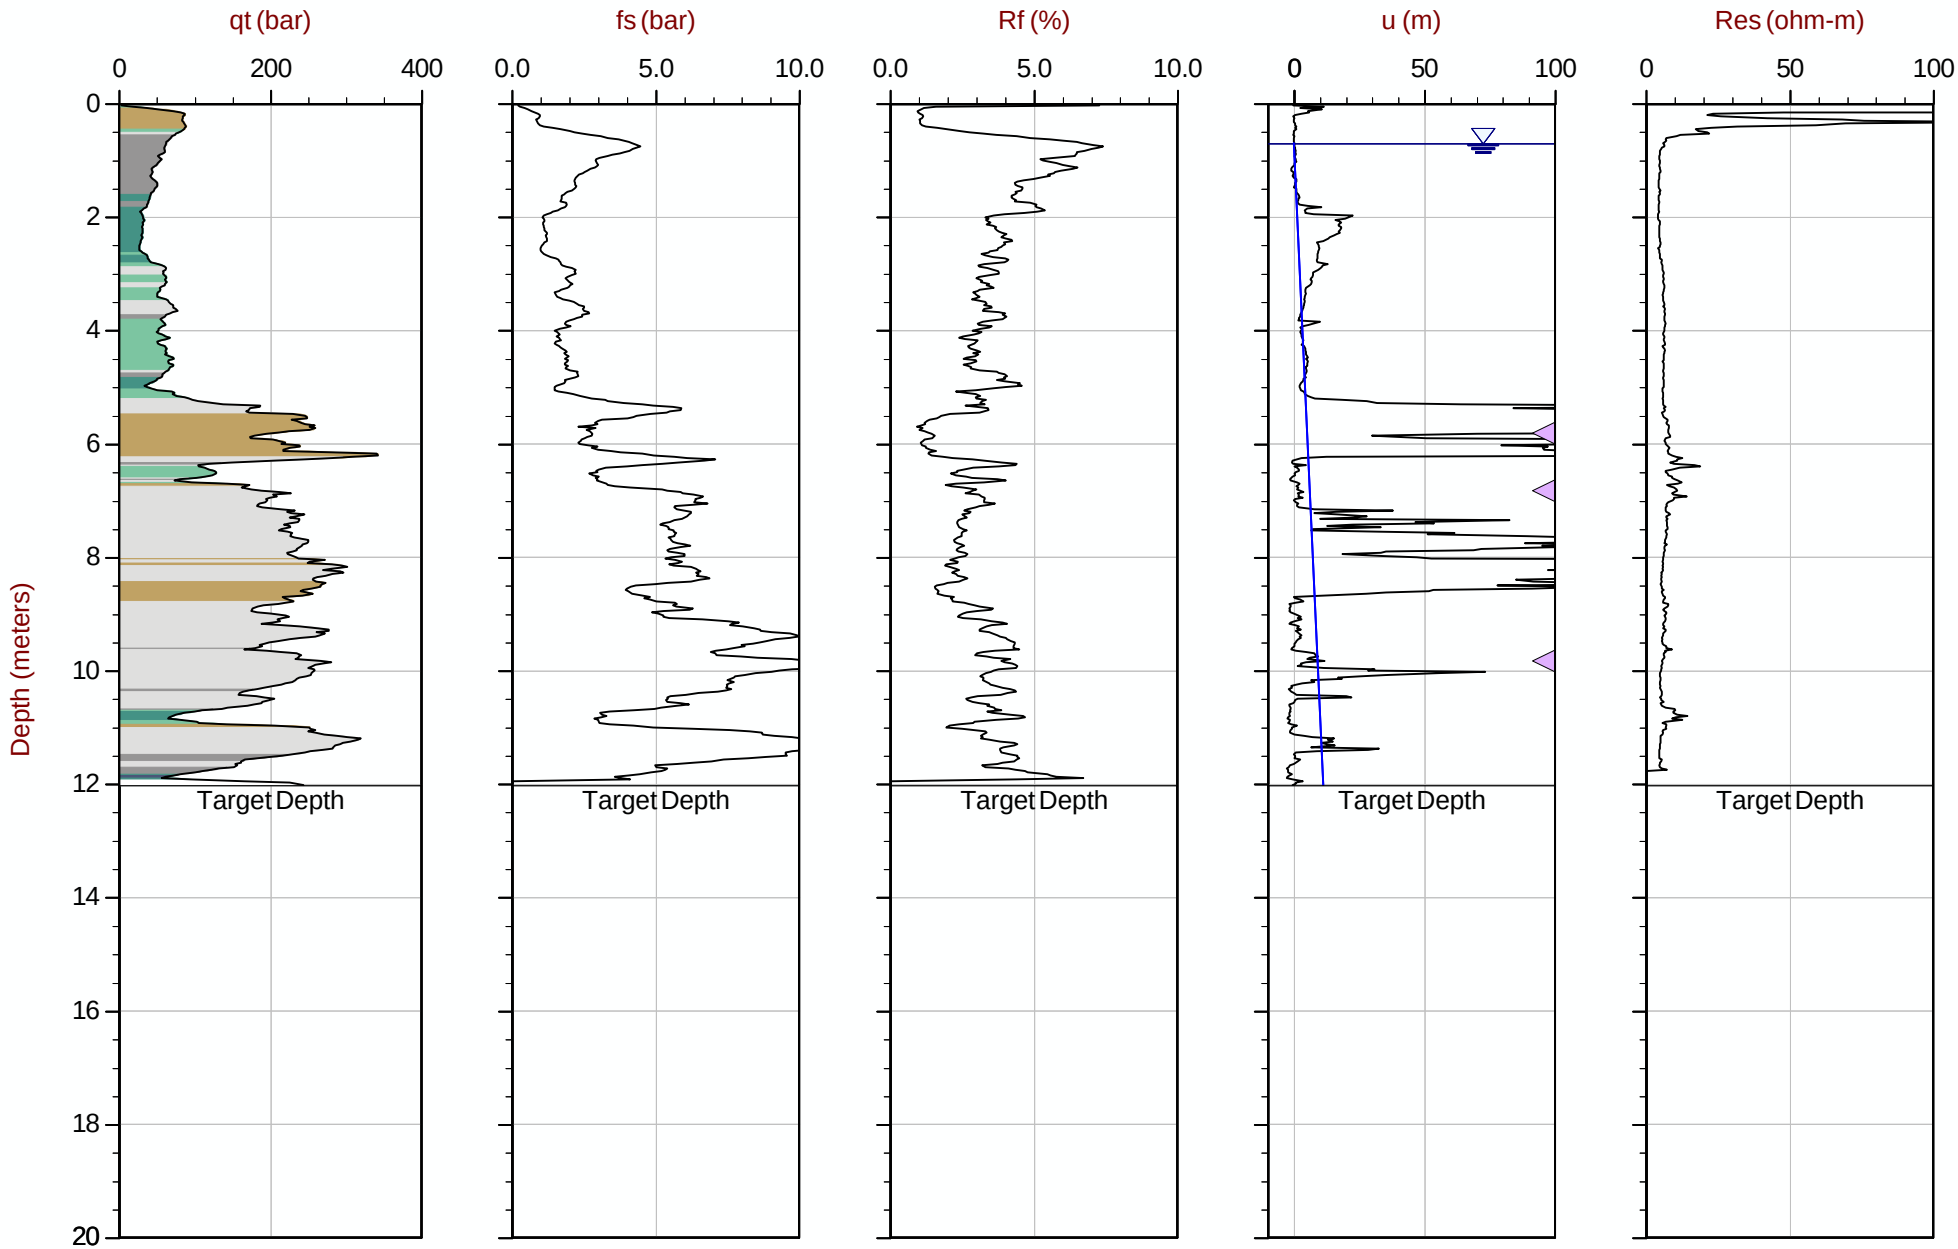

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT252.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609909m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 07:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT253
Cone: 854:T1500F15U35 Area= 15cm2

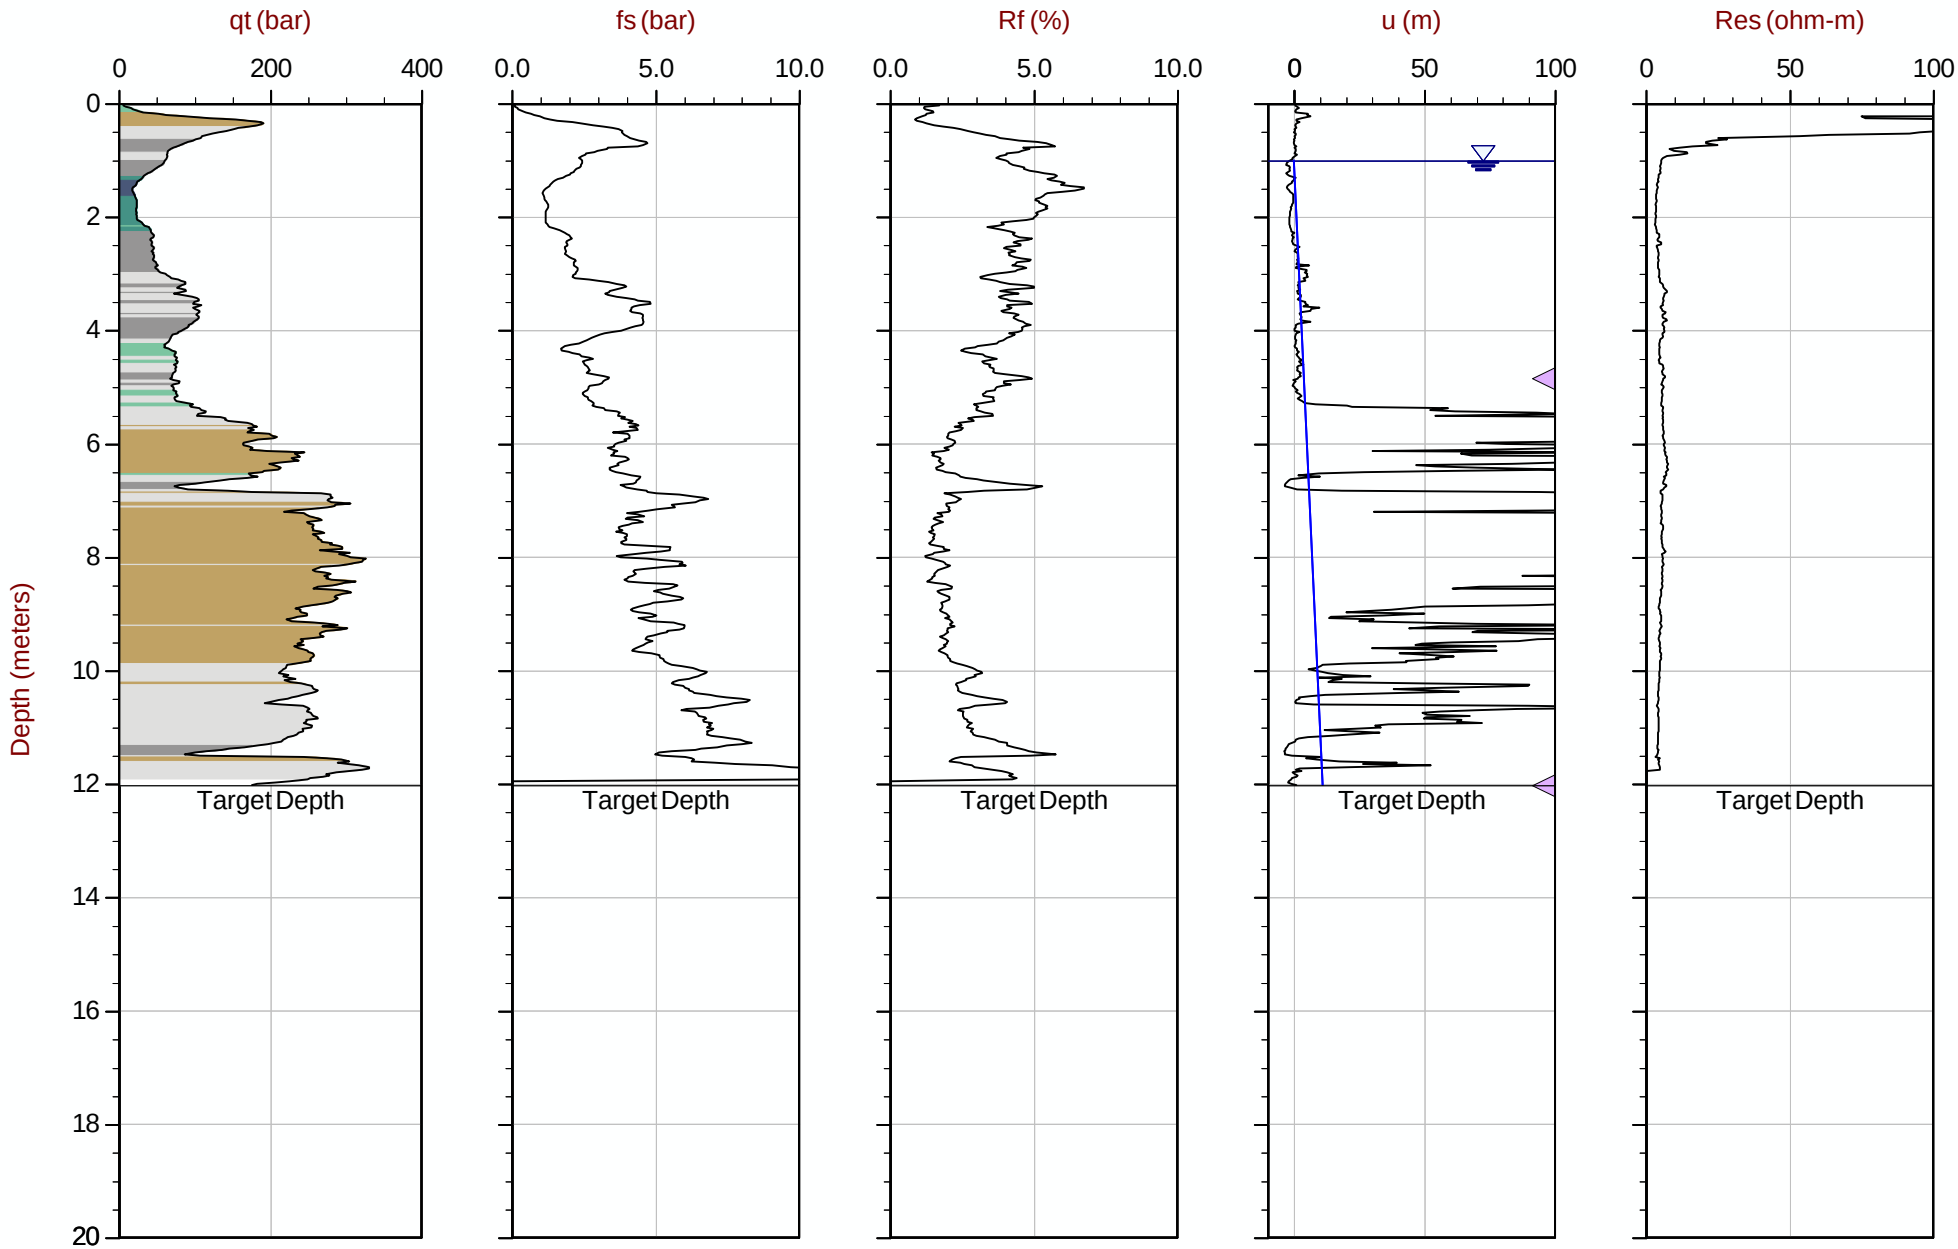

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22_22CPT253.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609860m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 11:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT254
Cone: 854:T1500F15U35 Area= 15cm2

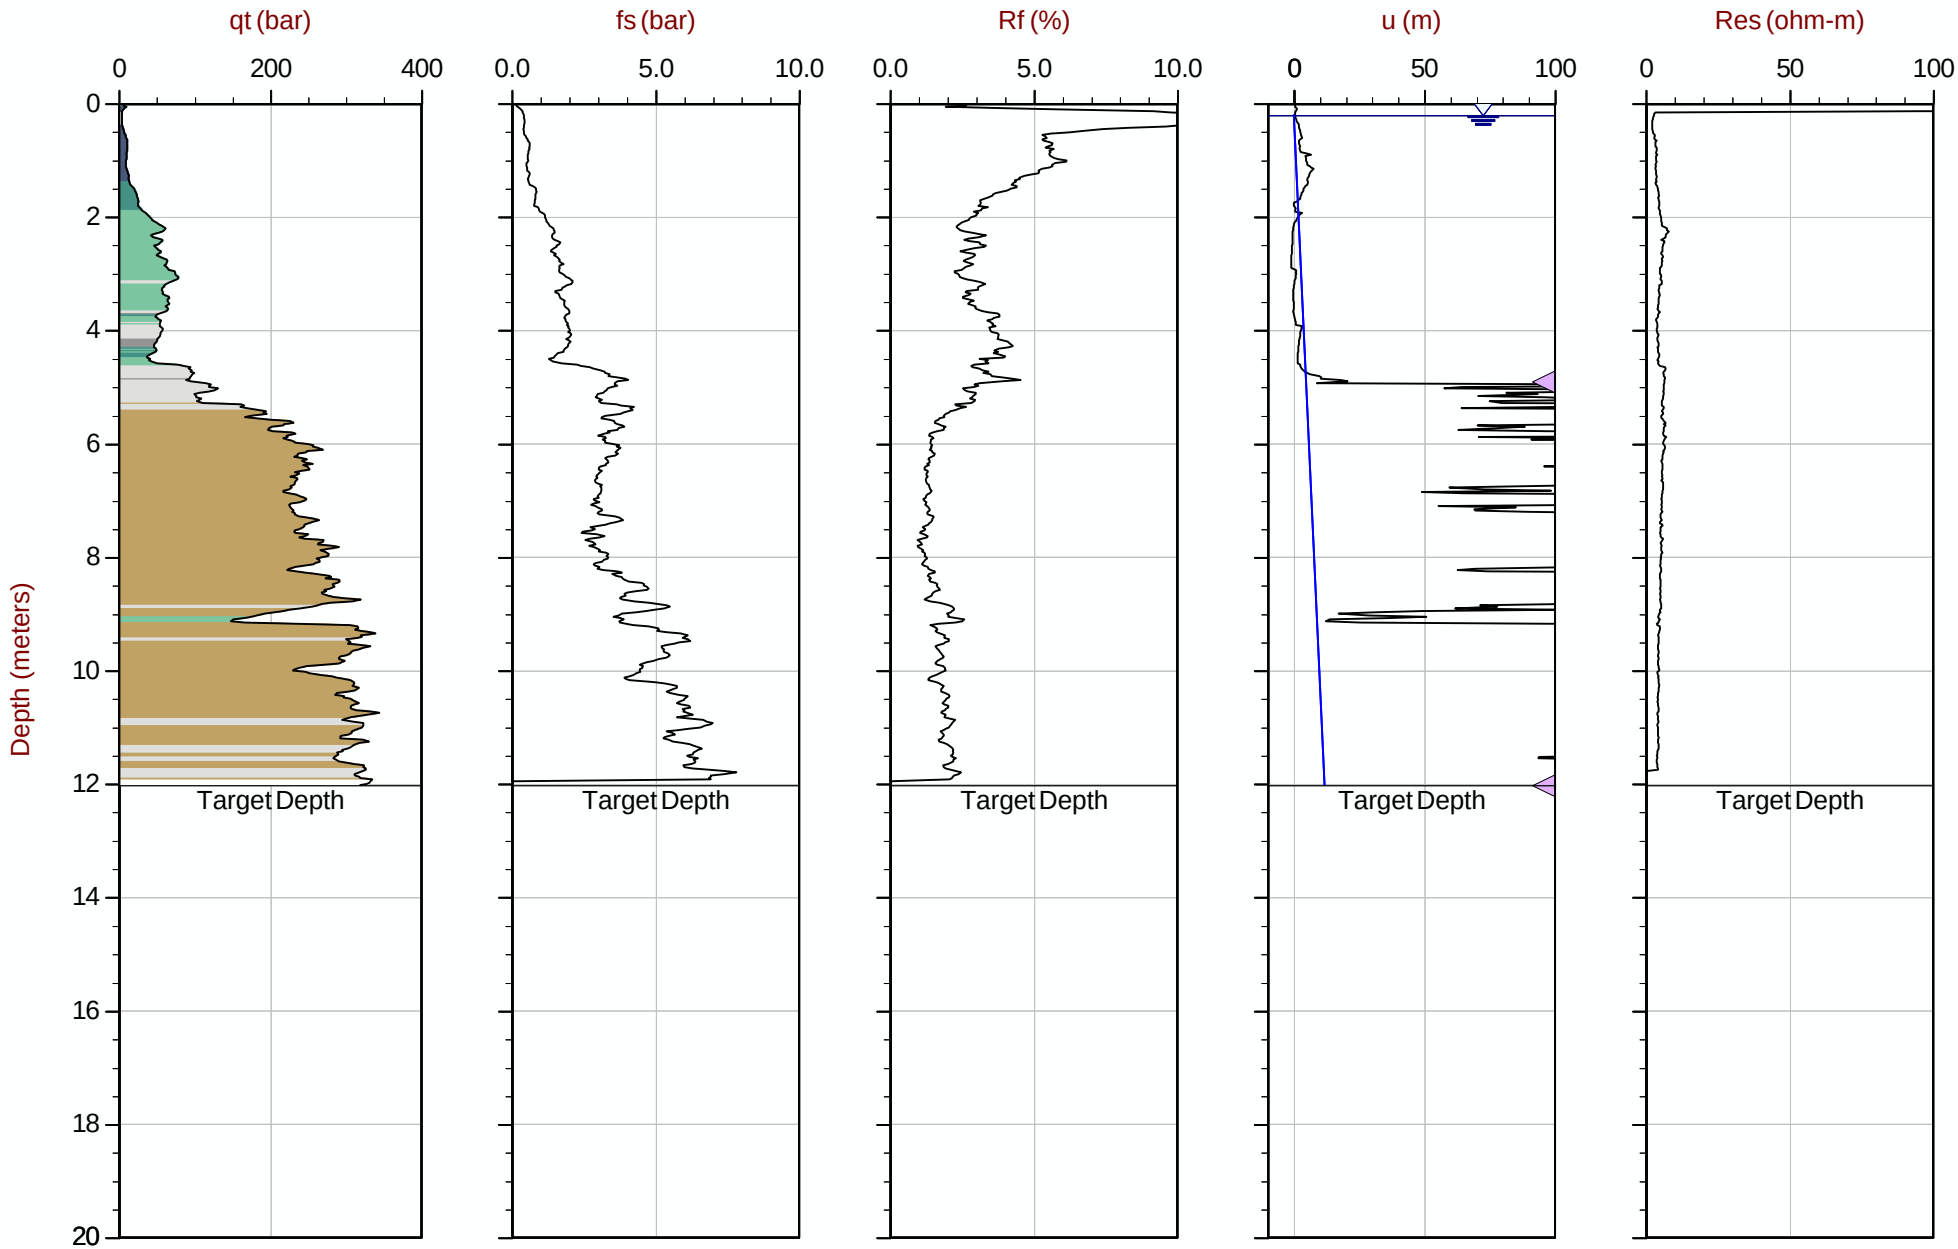

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT254.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609809m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 12:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT255
Cone: 854:T1500F15U35 Area= 15cm2

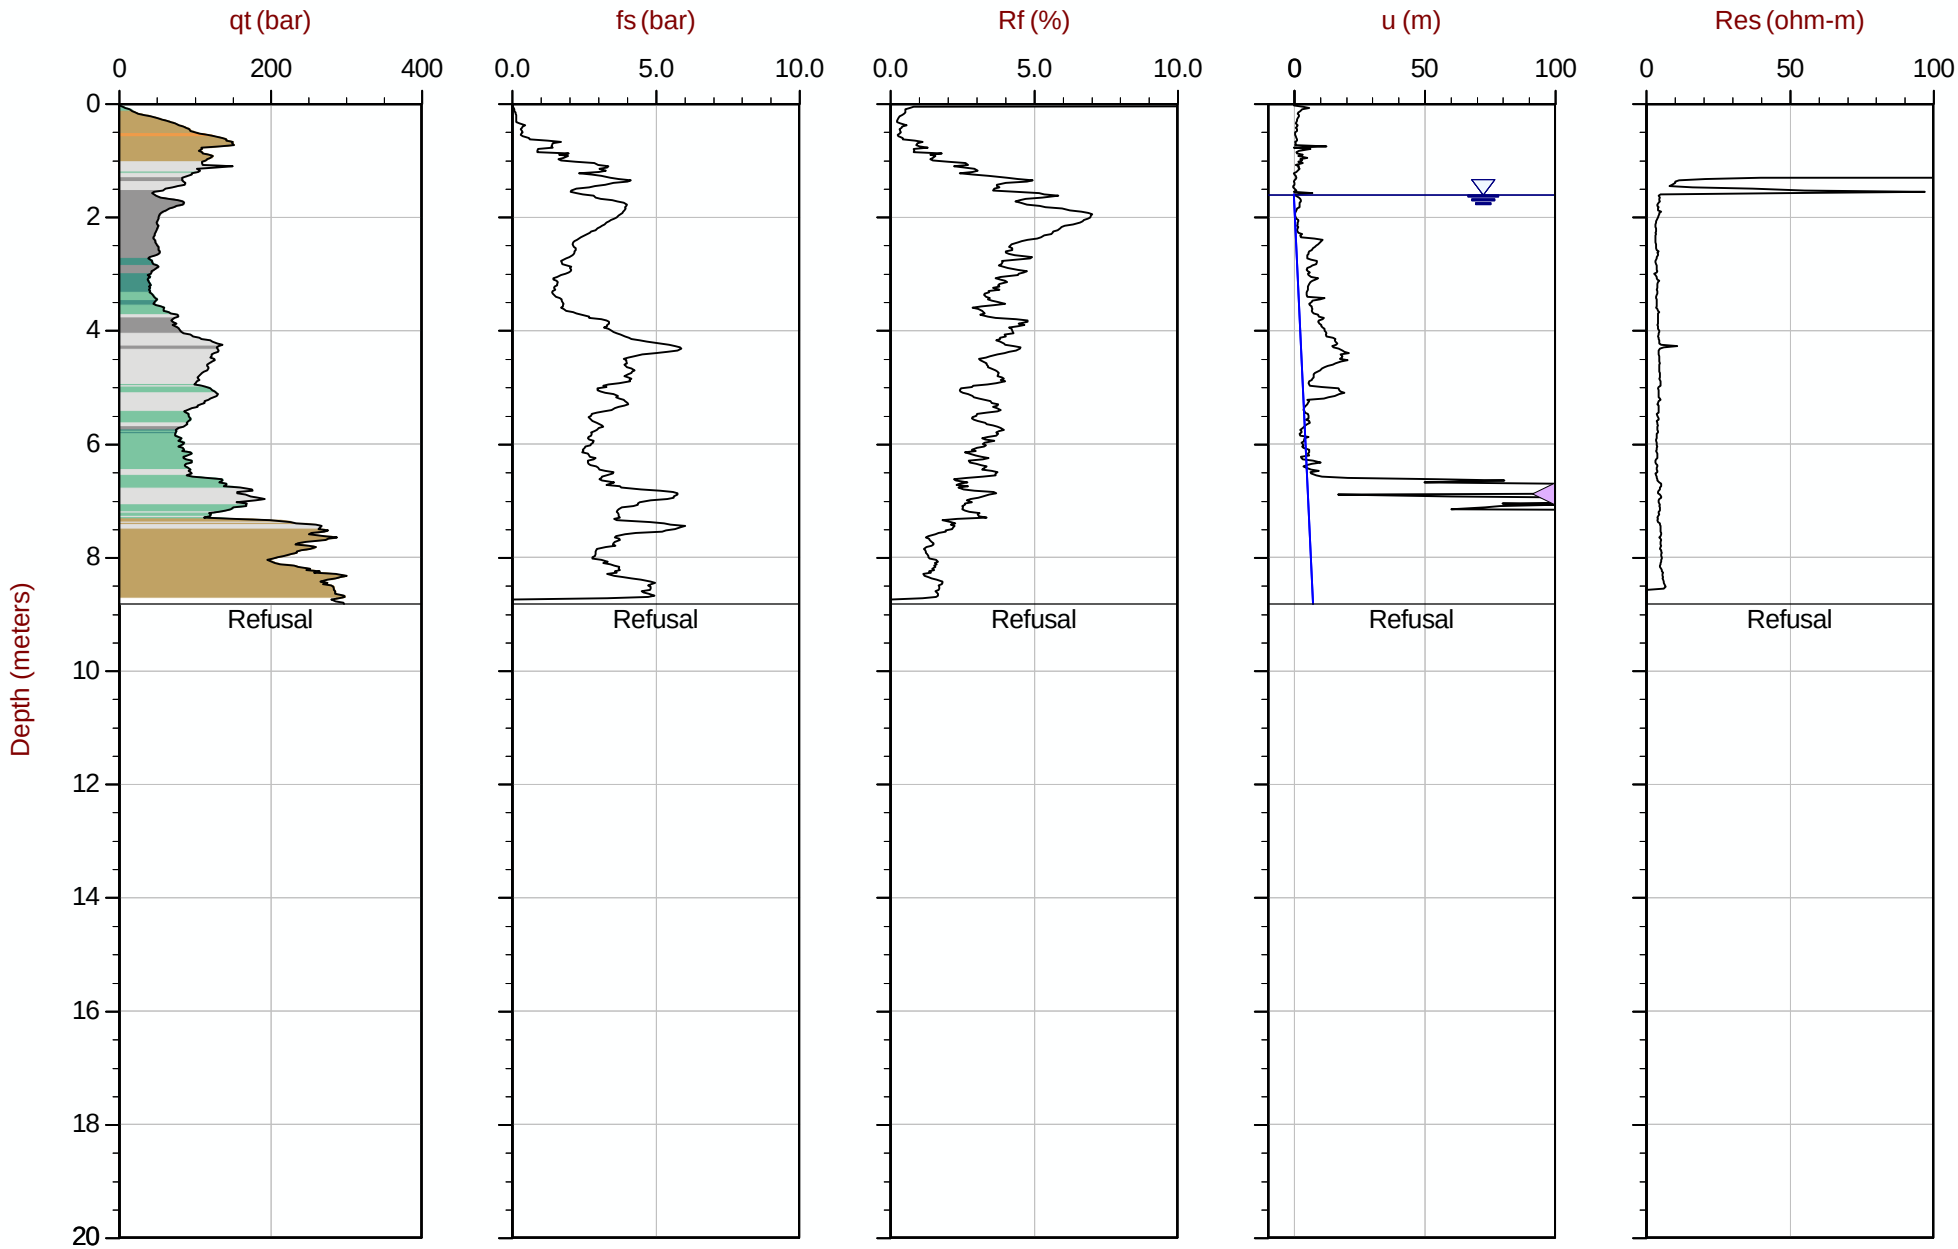

Max Depth: 8.825 m / 28.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT255.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609731m E: 416835m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 13:54
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT256
Cone: 854:T1500F15U35 Area= 15cm2

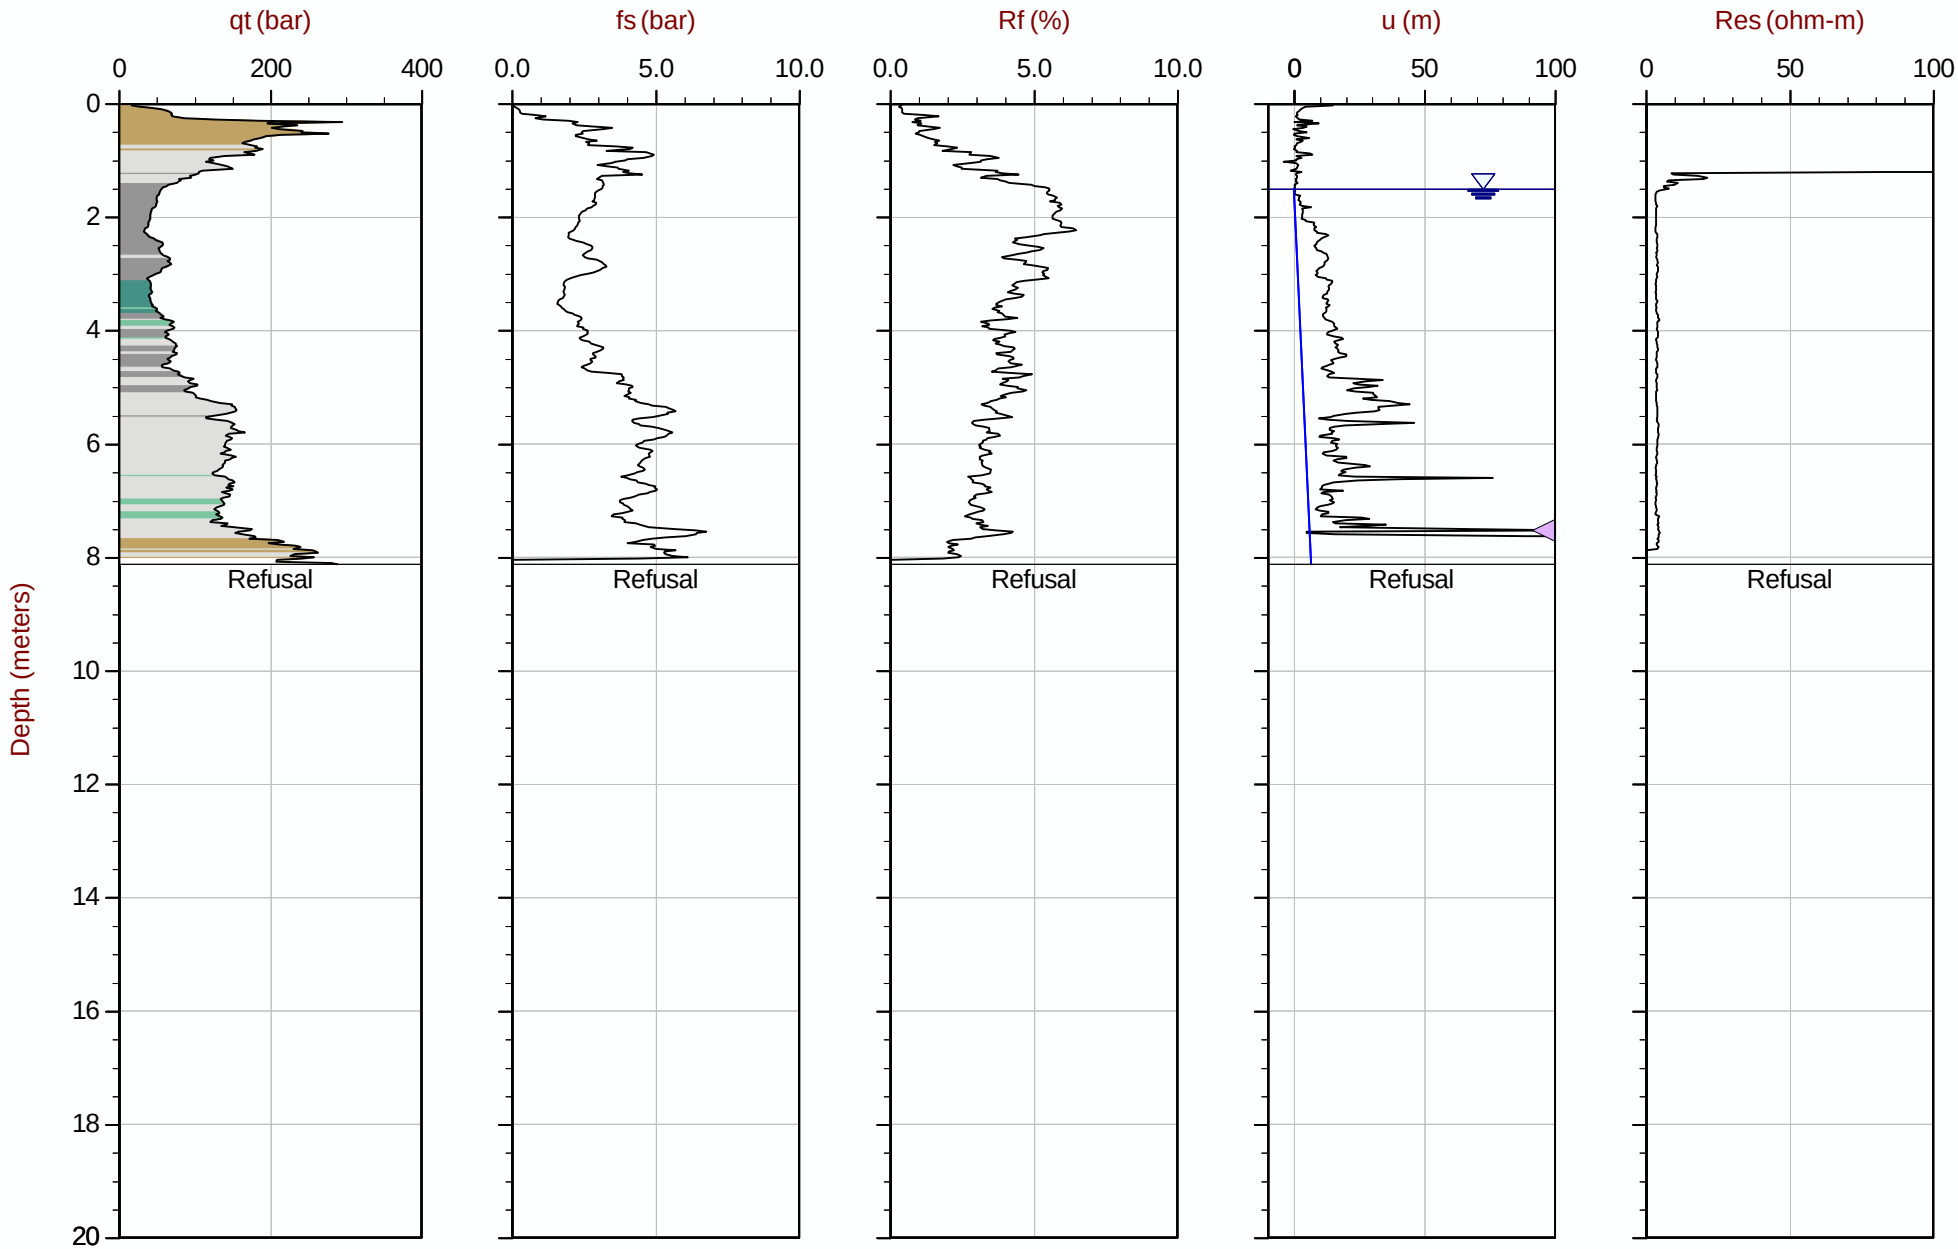

Max Depth: 8.125 m / 26.66 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT256.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609681m E: 416828m Elev: 768.534m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 15:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT257
Cone: 854:T1500F15U35 Area= 15cm2

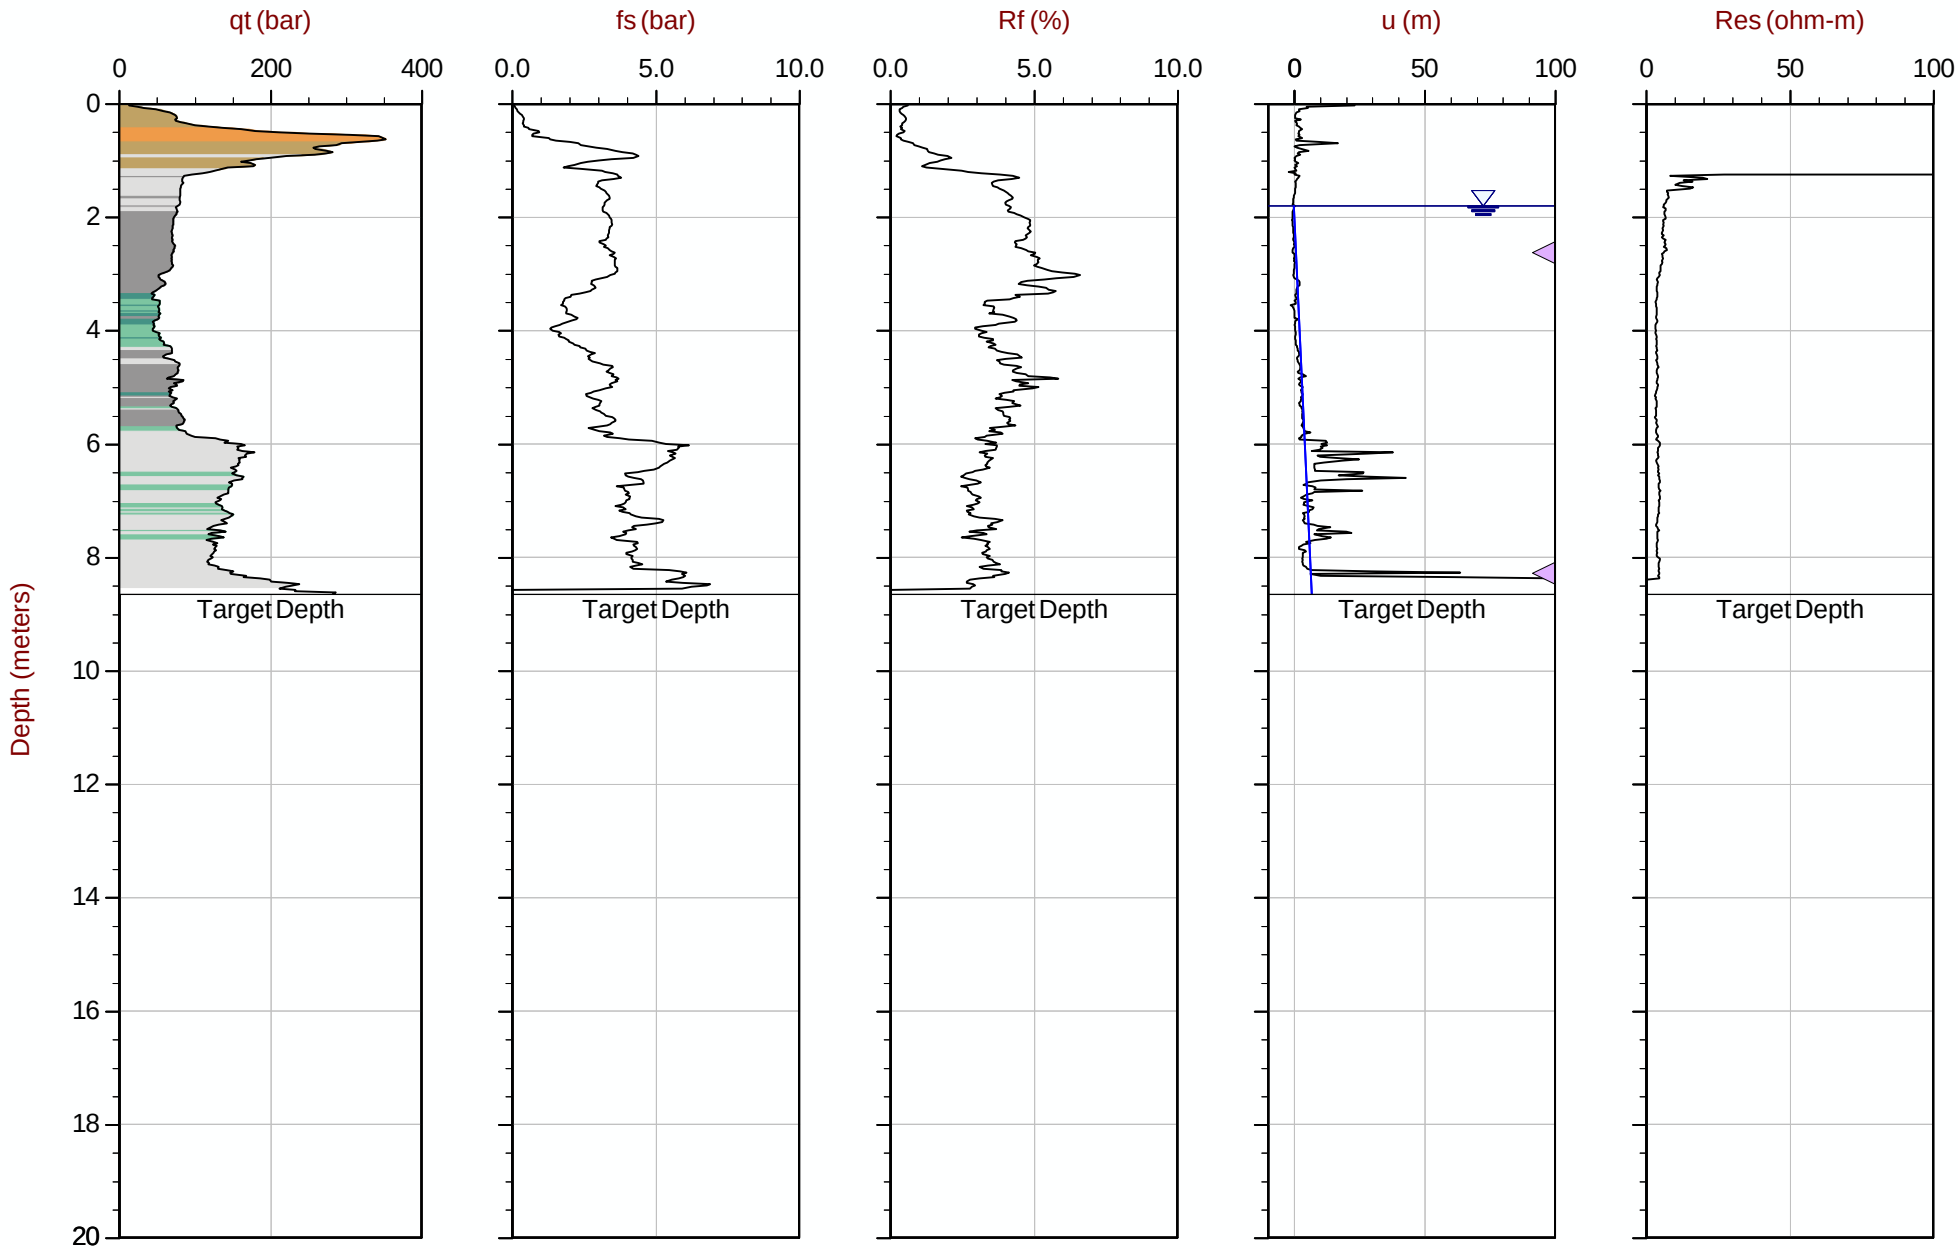

Max Depth: 8.650 m / 28.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT257.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609637m E: 416810m Elev: 768.293m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 16:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT258
Cone: 854:T1500F15U35 Area= 15cm2

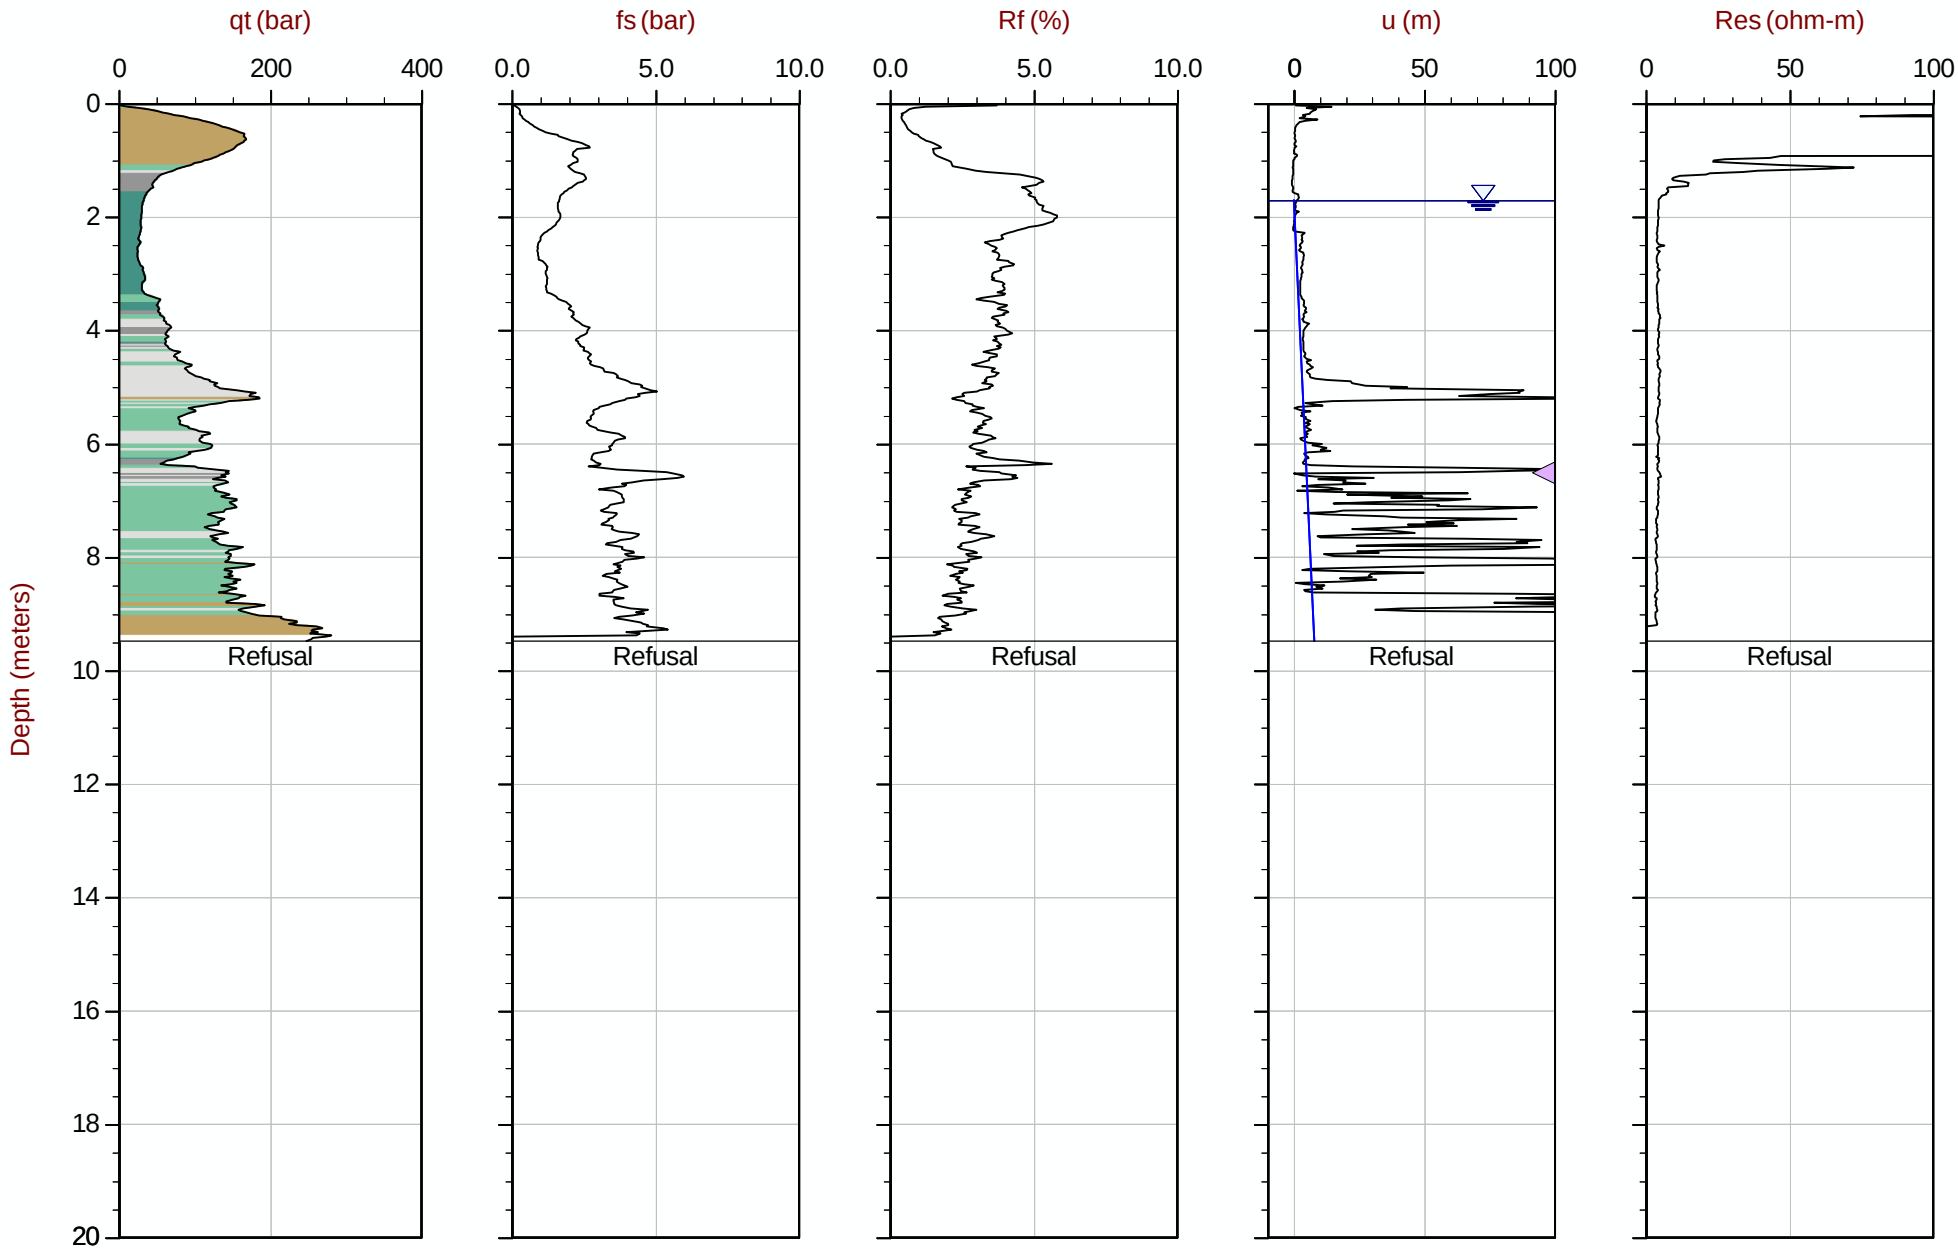

Max Depth: 9.475 m / 31.09 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT258.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609596m E: 416785m Elev: 768.056m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 14:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT259
Cone: 854:T1500F15U35 Area= 15cm2

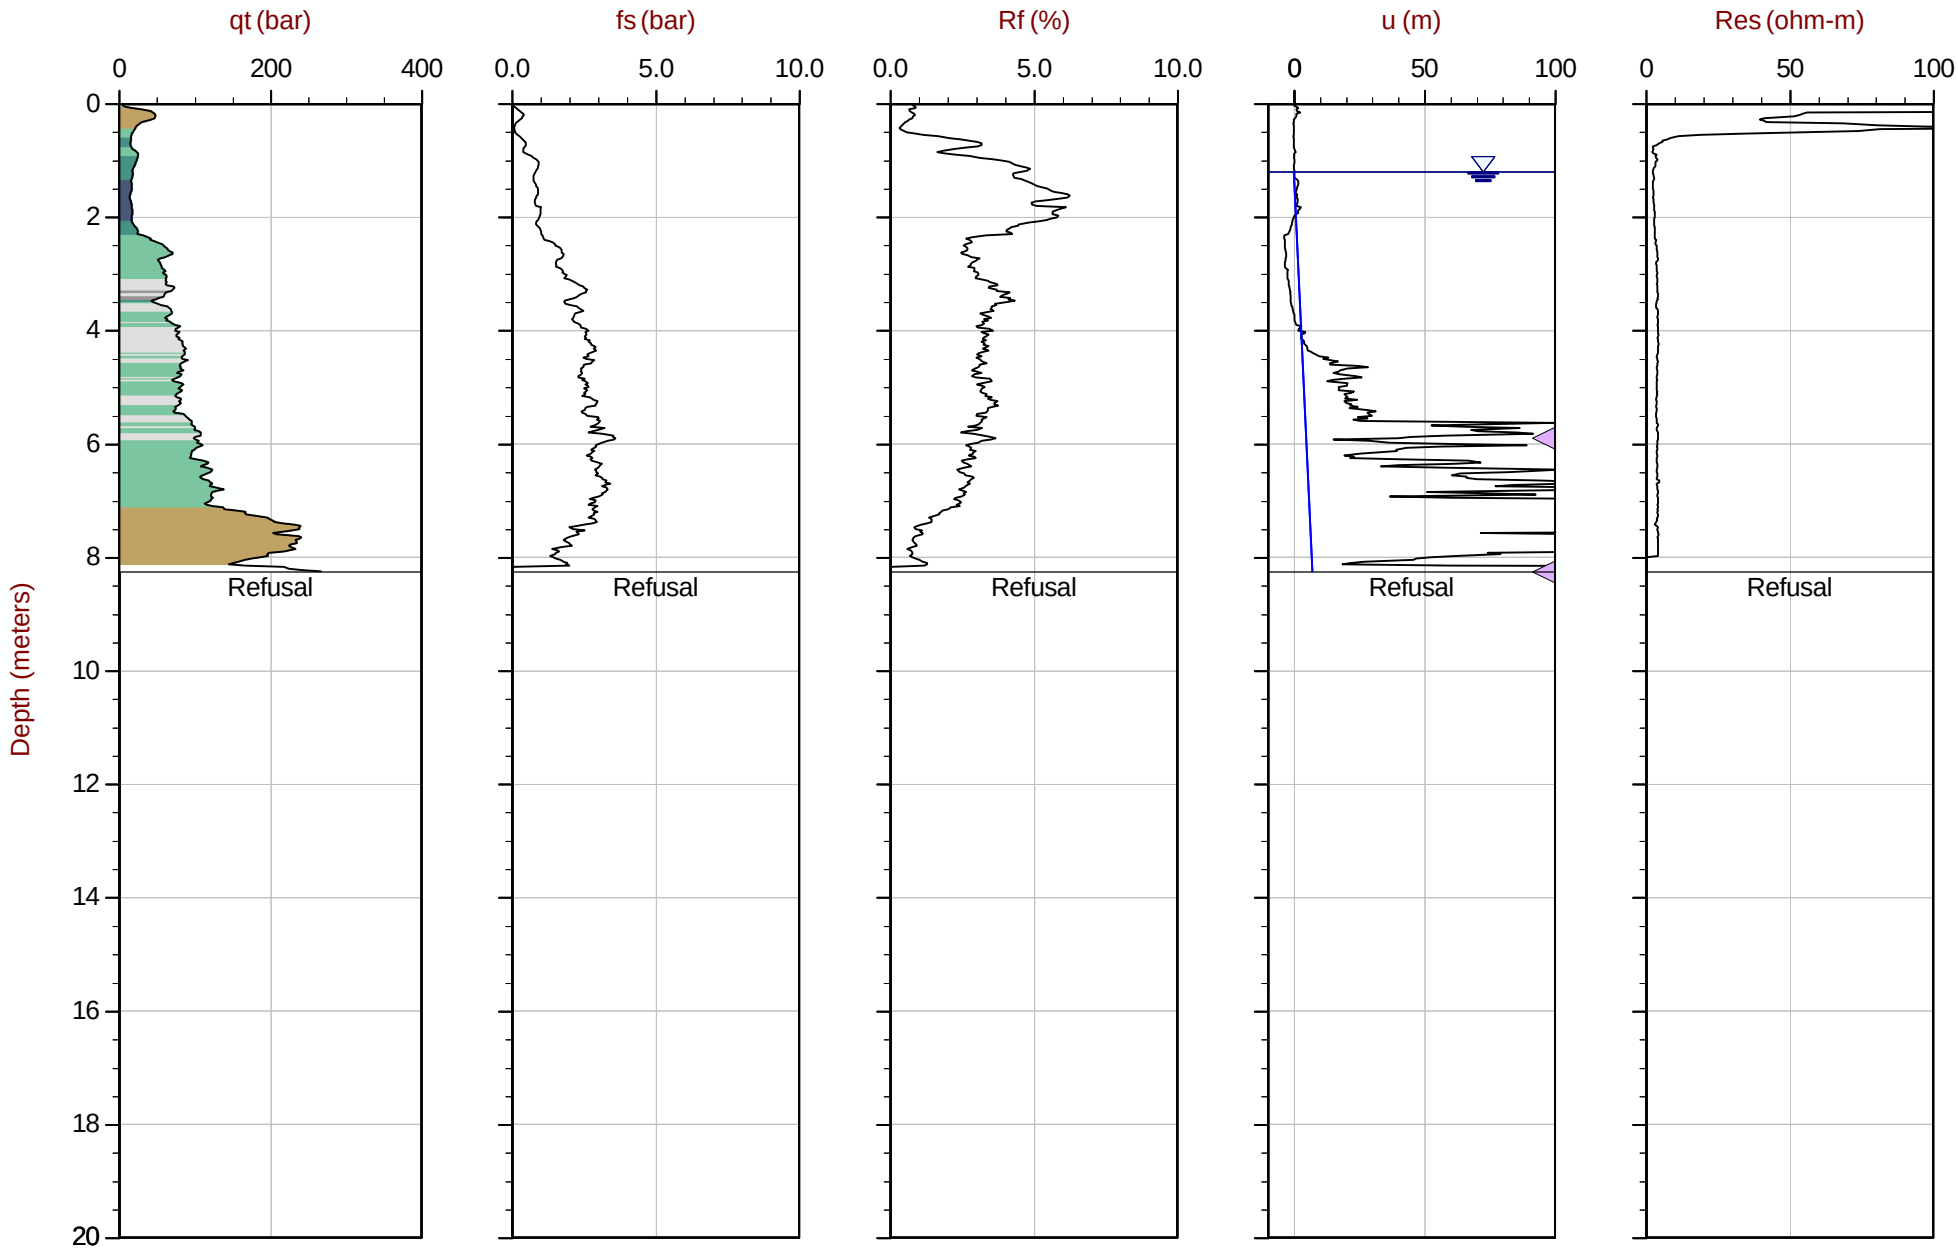

Max Depth: 8.250 m / 27.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT259.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612543m E: 416724m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 17:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT260
Cone: 854:T1500F15U35 Area= 15cm2

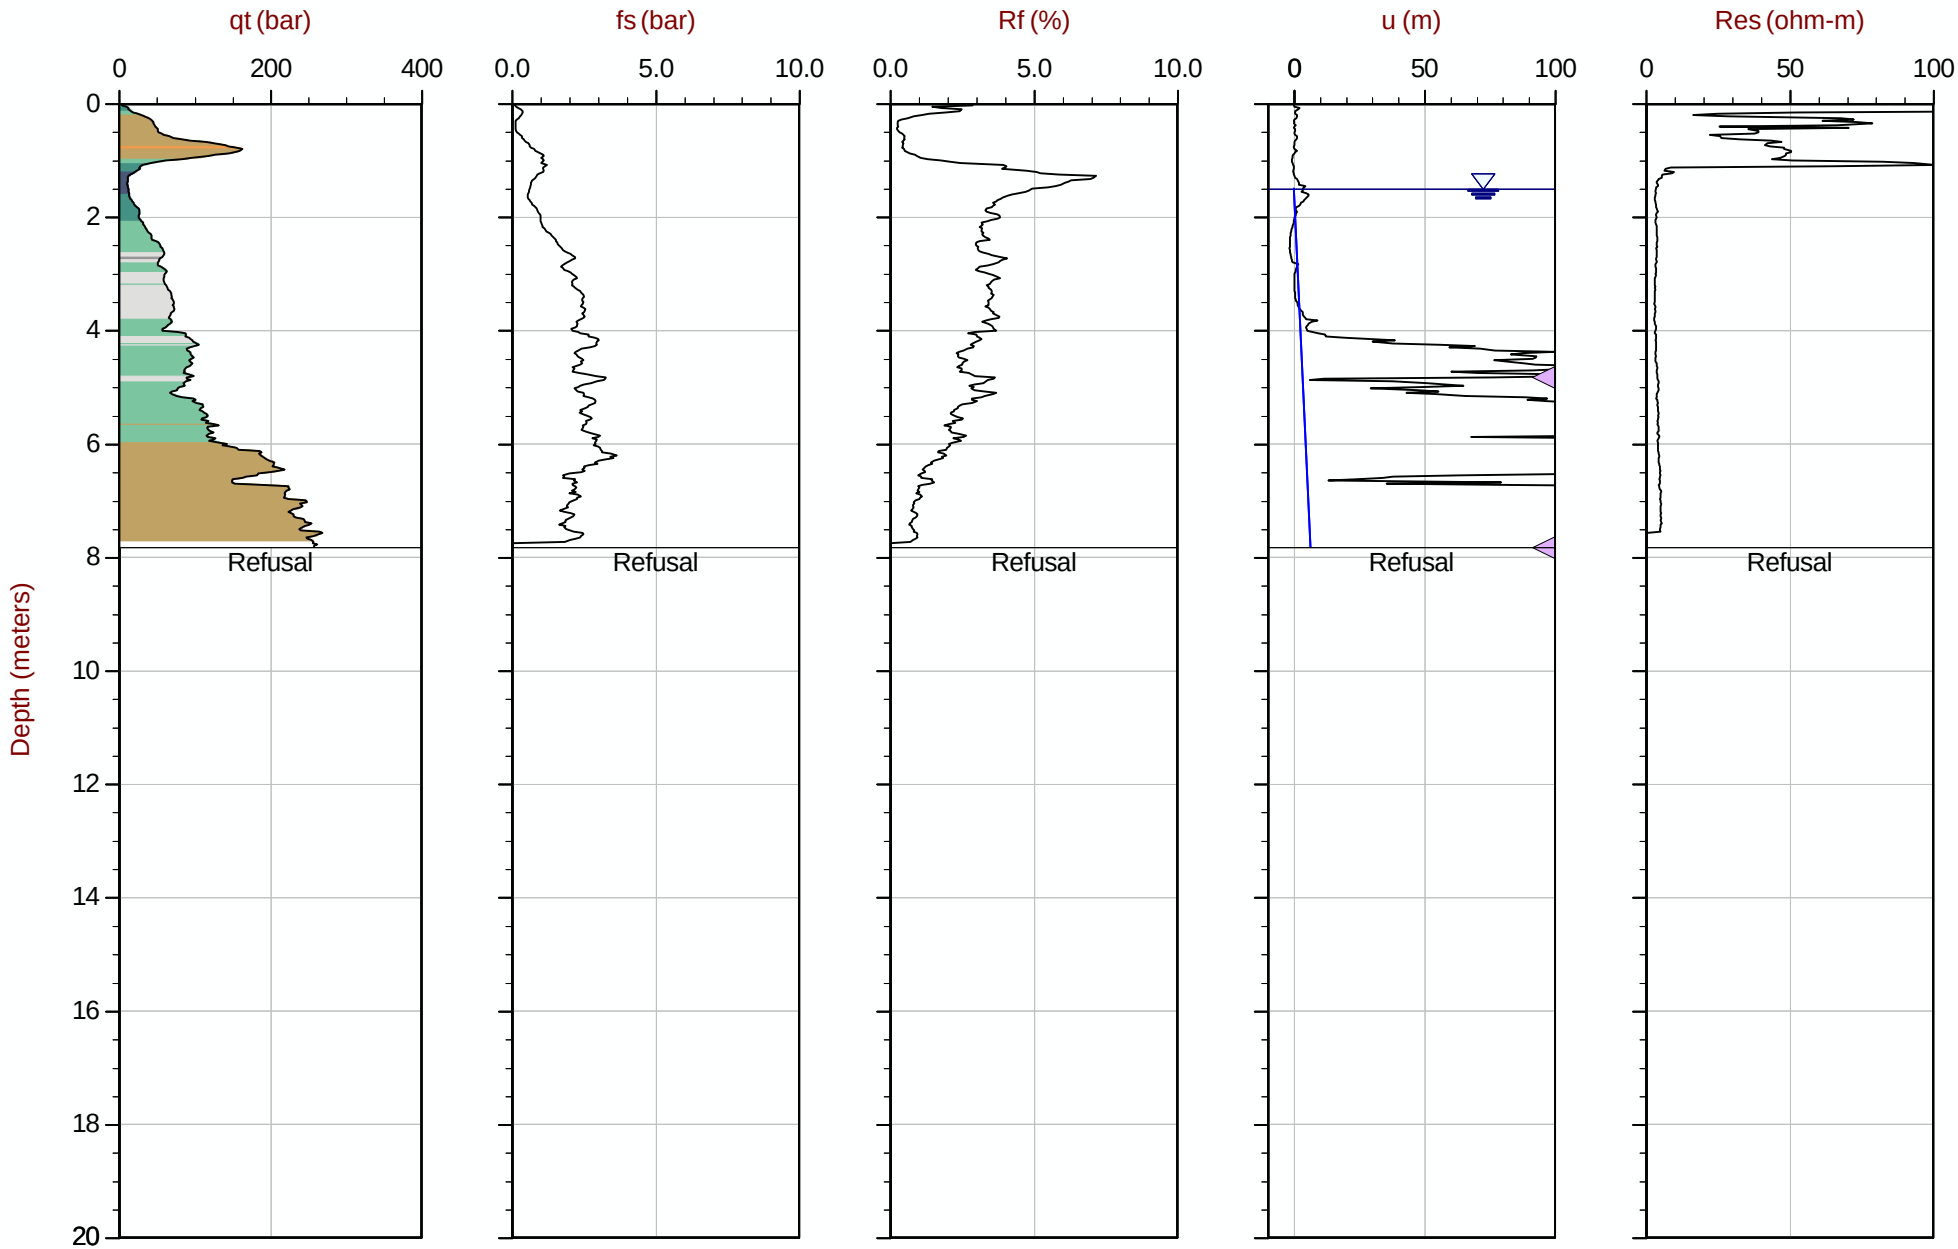

Max Depth: 7.825 m / 25.67 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT260.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612481m E: 416823m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 13:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT261
Cone: 821:T1000F10U35 Area= 15cm2

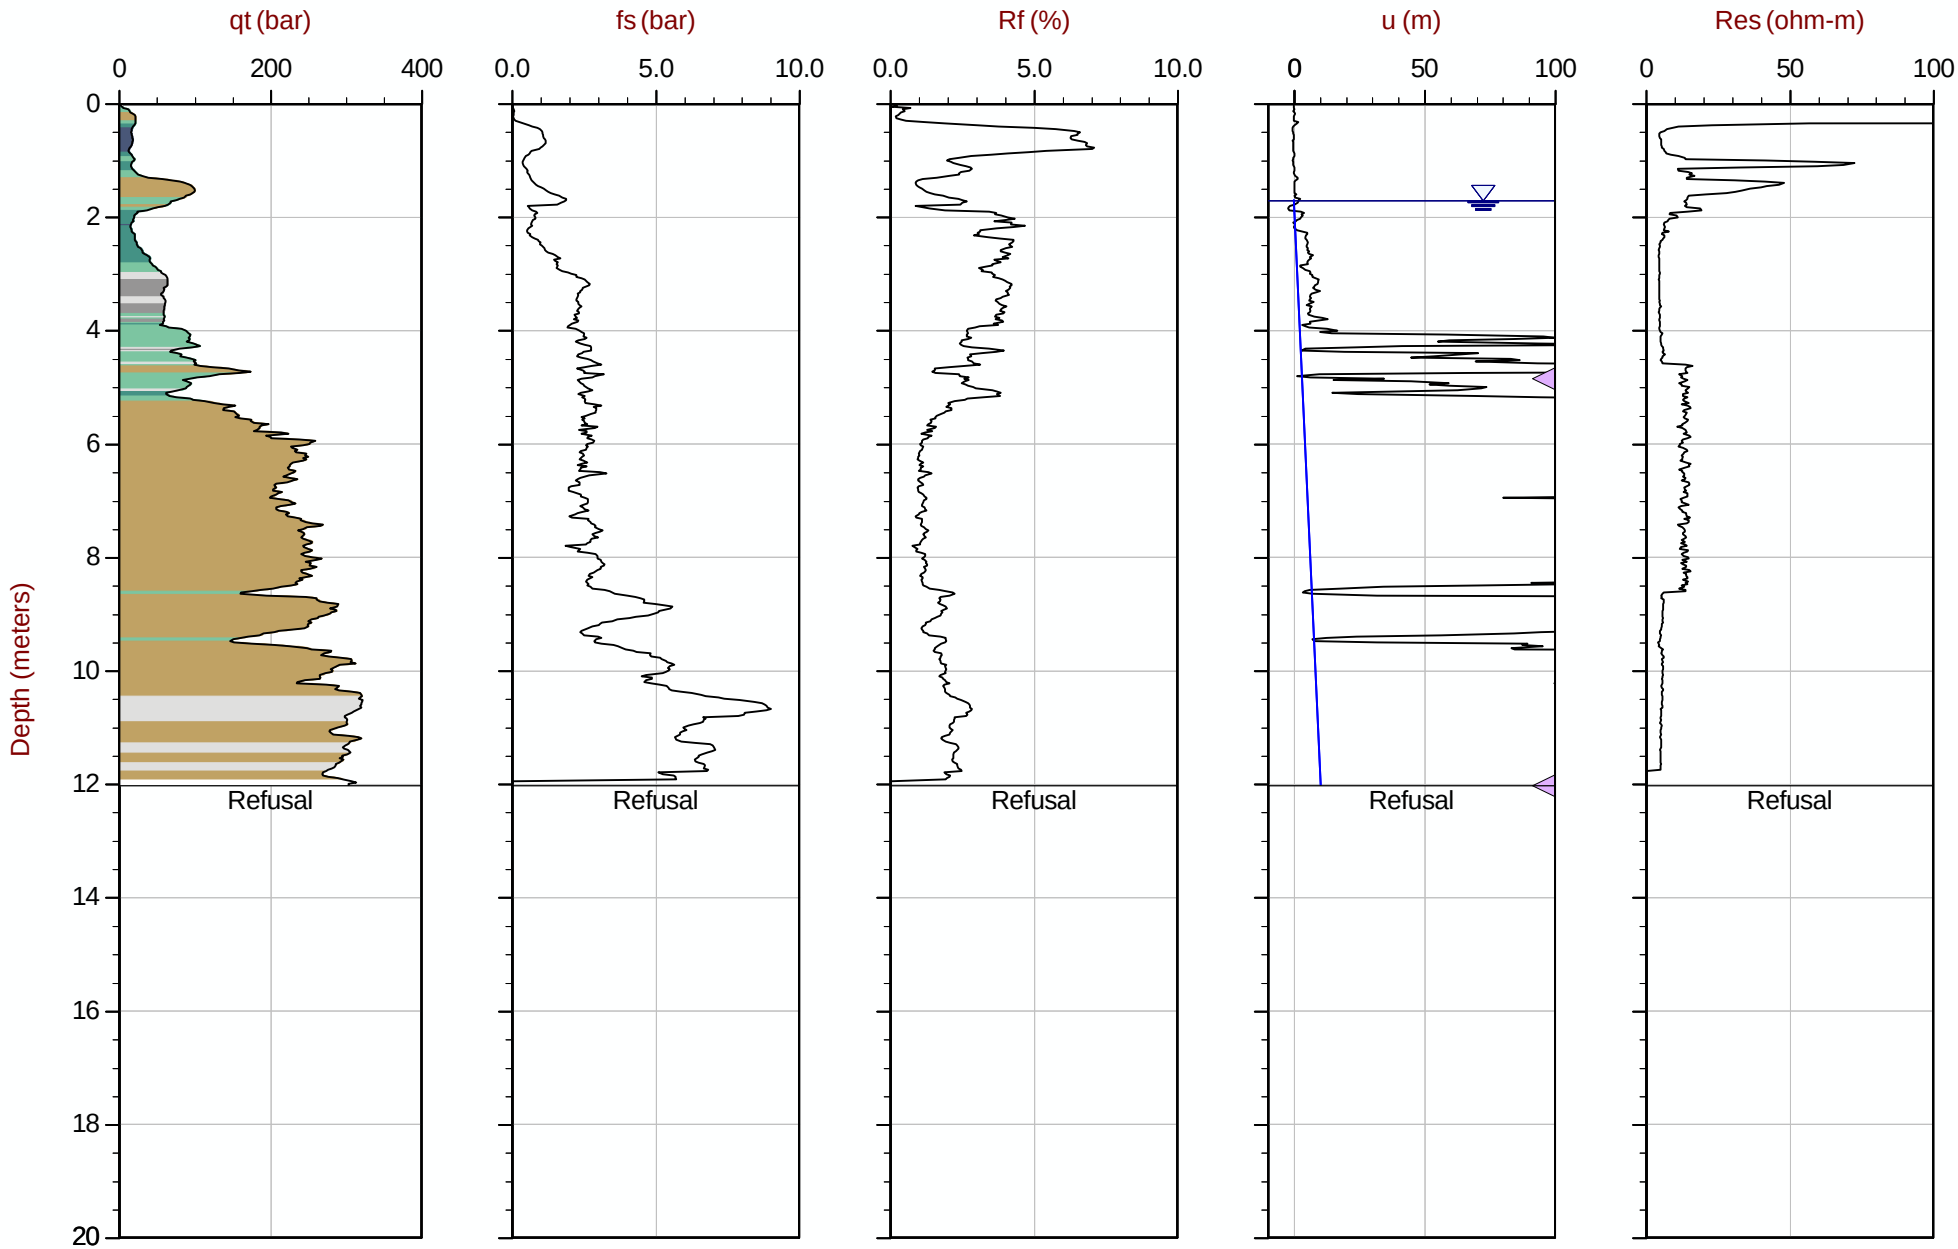

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT261.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612389m E: 416896m Elev: 767.458m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 12:35
Site: Brooks, Alberta

Sounding: RCPT22-22CPT262
Cone: 821:T1000F10U35 Area= 15cm2

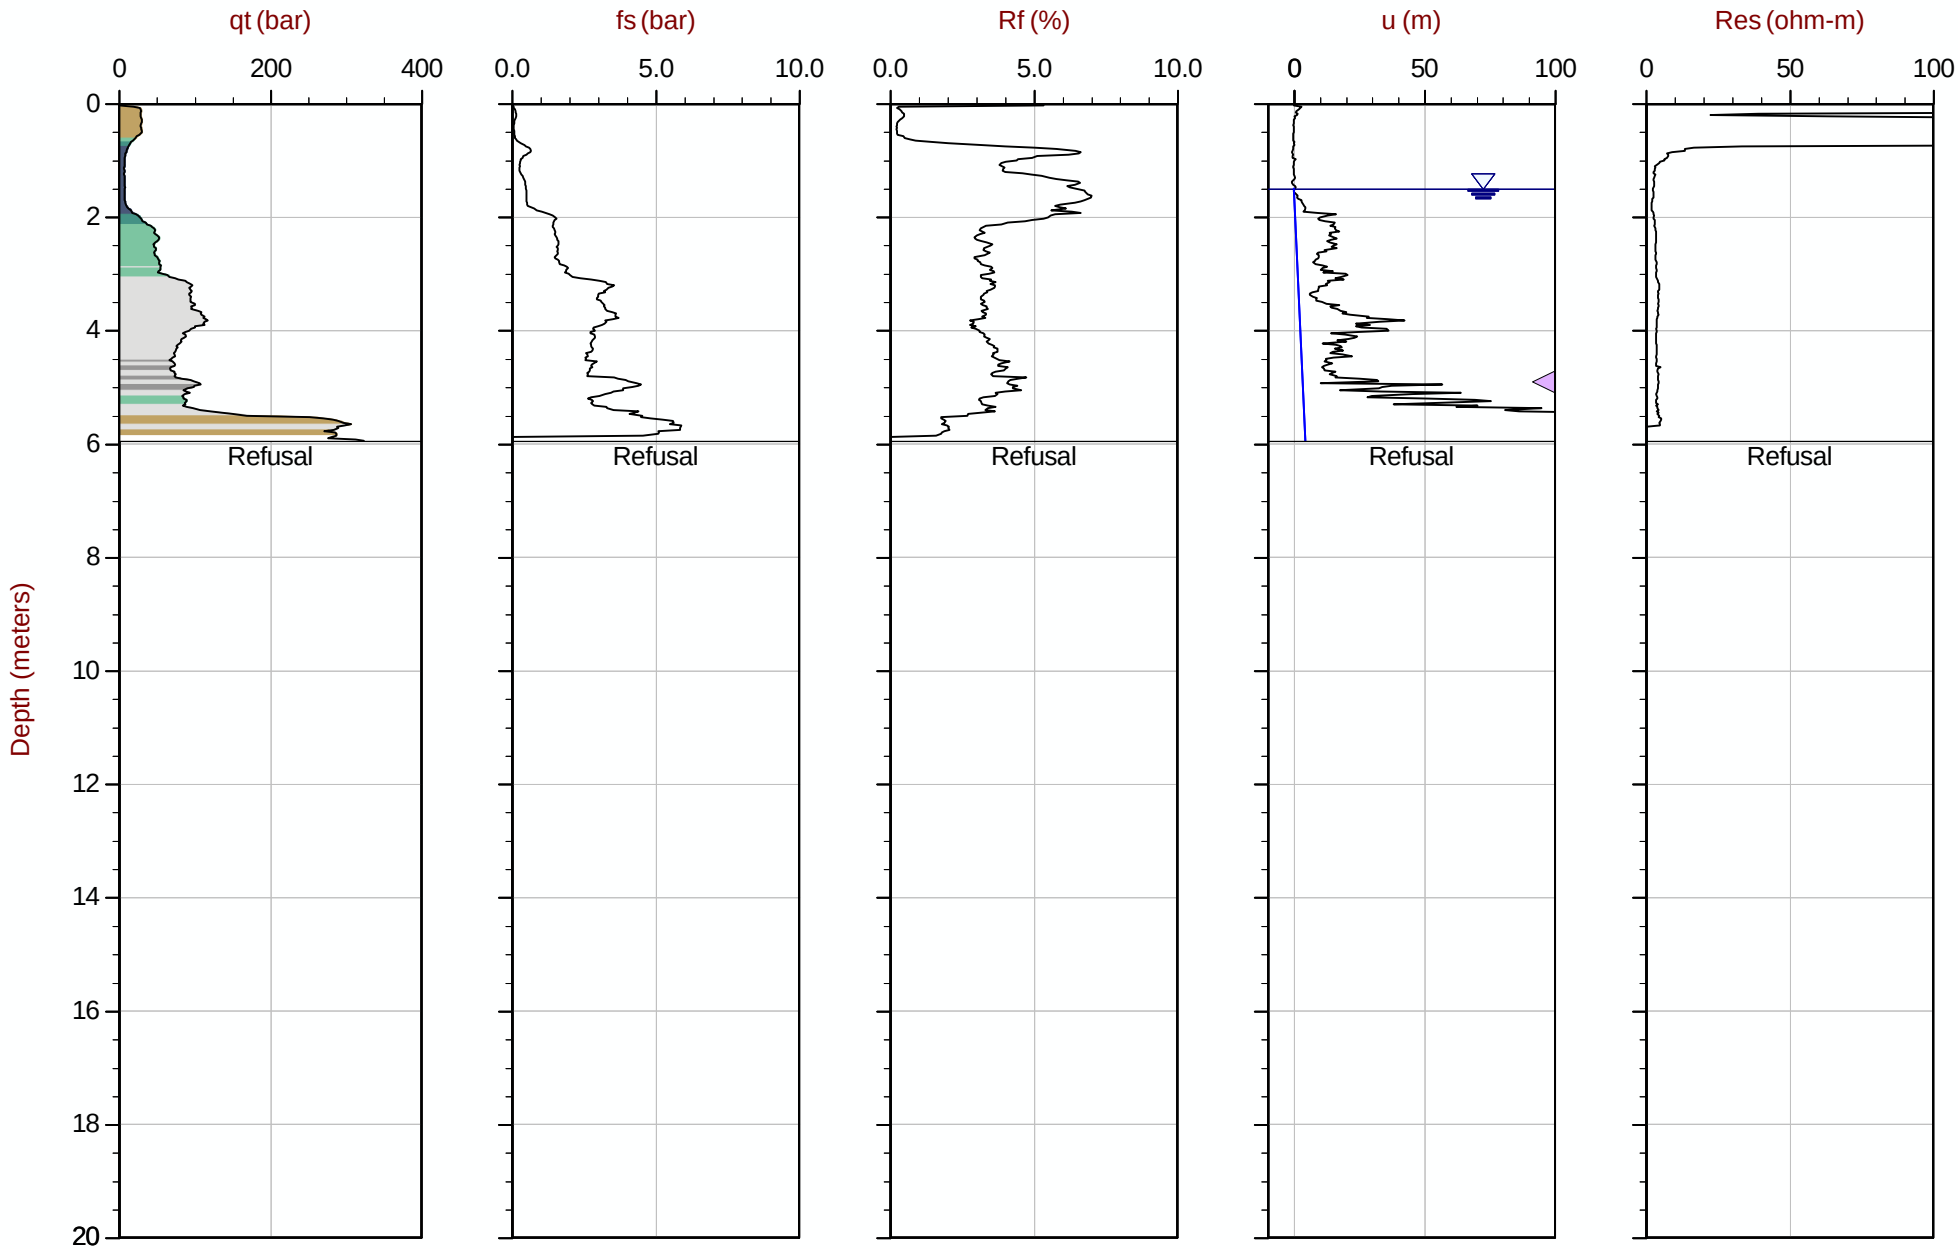

Max Depth: 5.950 m / 19.52 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT262.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612278m E: 416934m Elev: 767.455m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 11:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT263
Cone: 821:T1000F10U35 Area= 15cm2

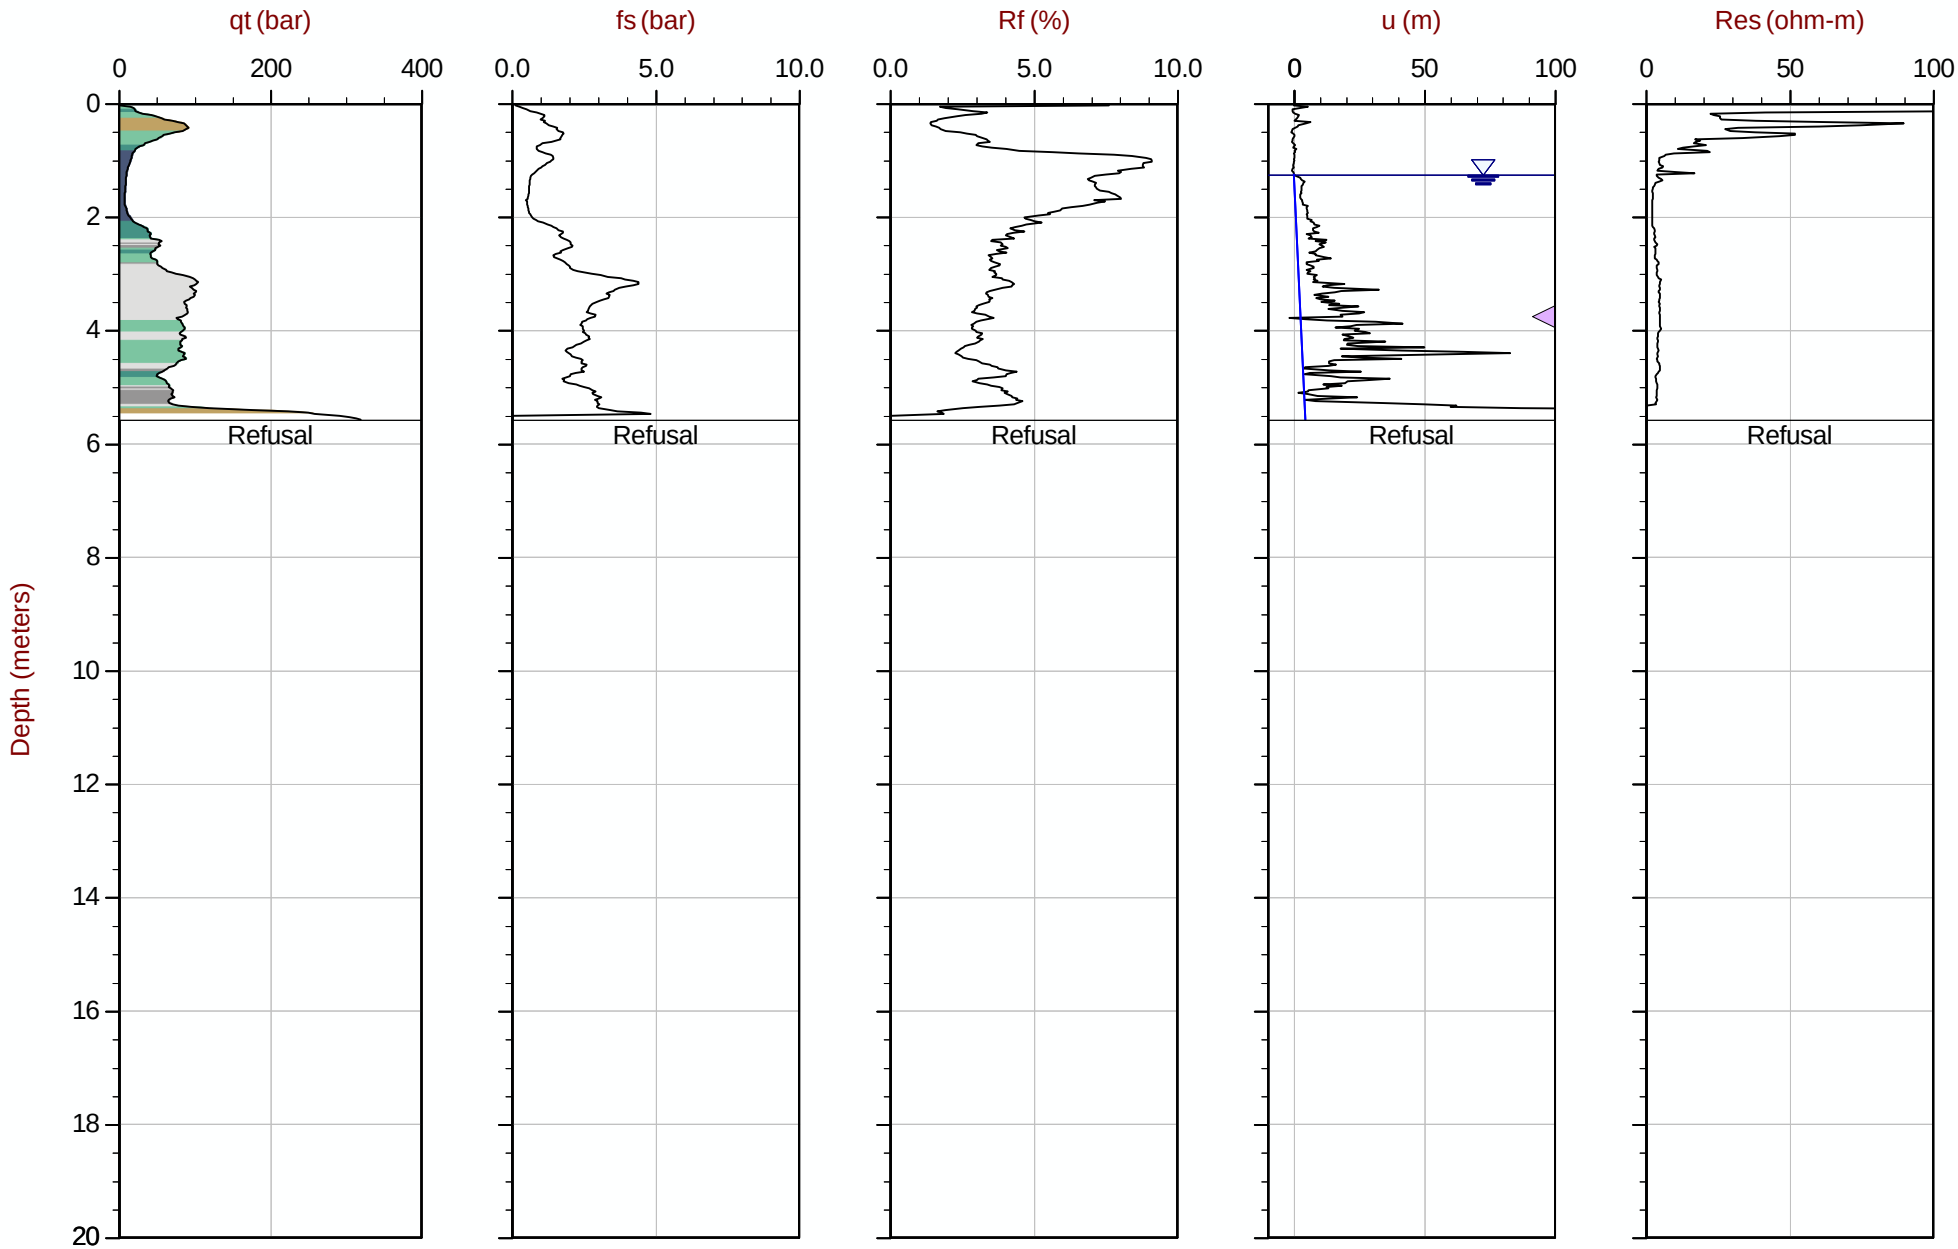

Max Depth: 5.575 m / 18.29 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT263.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612168m E: 416938m Elev: 767.248m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 10:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT264
Cone: 821:T1000F10U35 Area= 15cm2

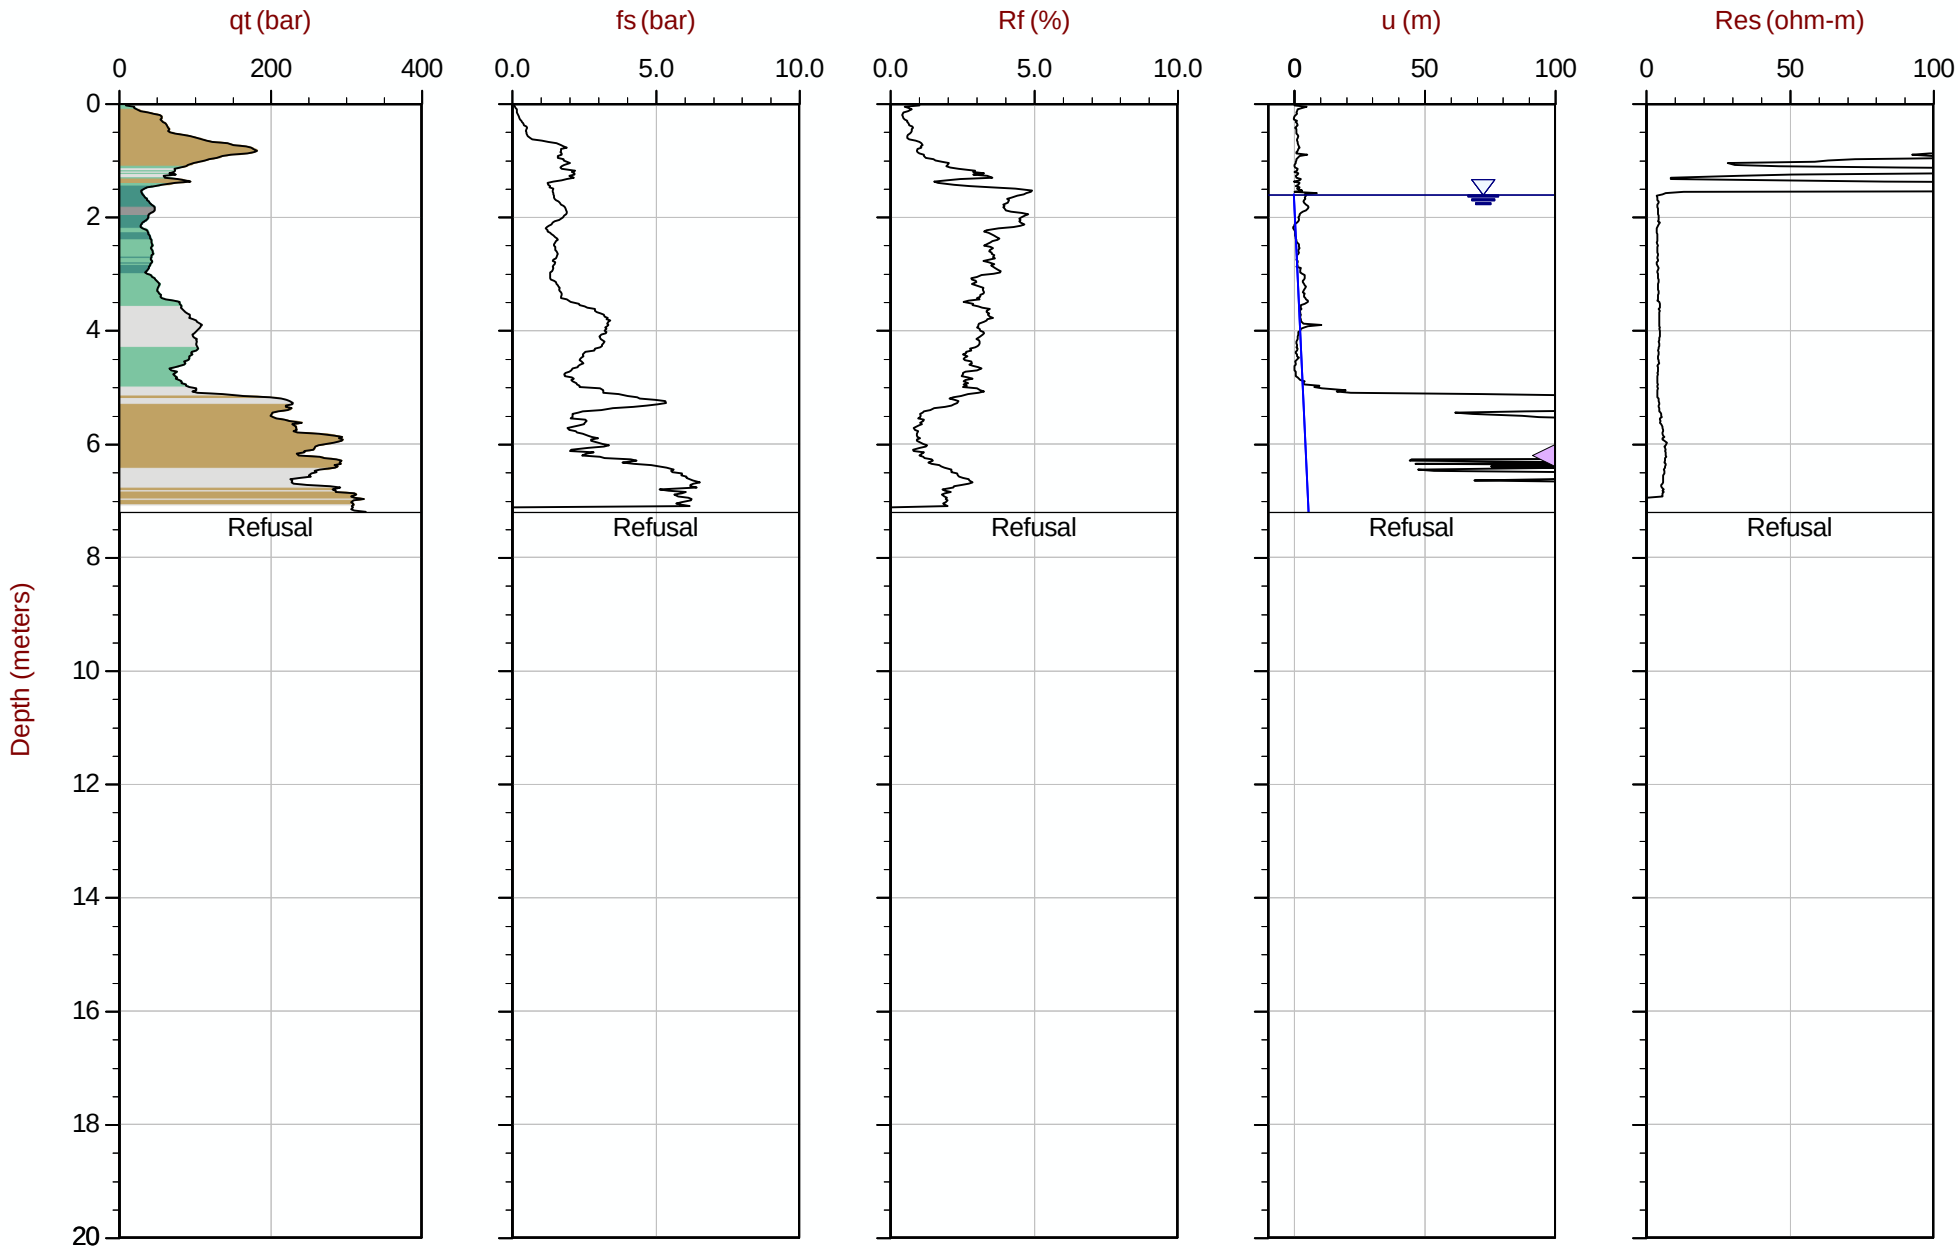

Max Depth: 7.200 m / 23.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT264.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612068m E: 416934m Elev: 767.730m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 10:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT265
Cone: 821:T1000F10U35 Area= 15cm2

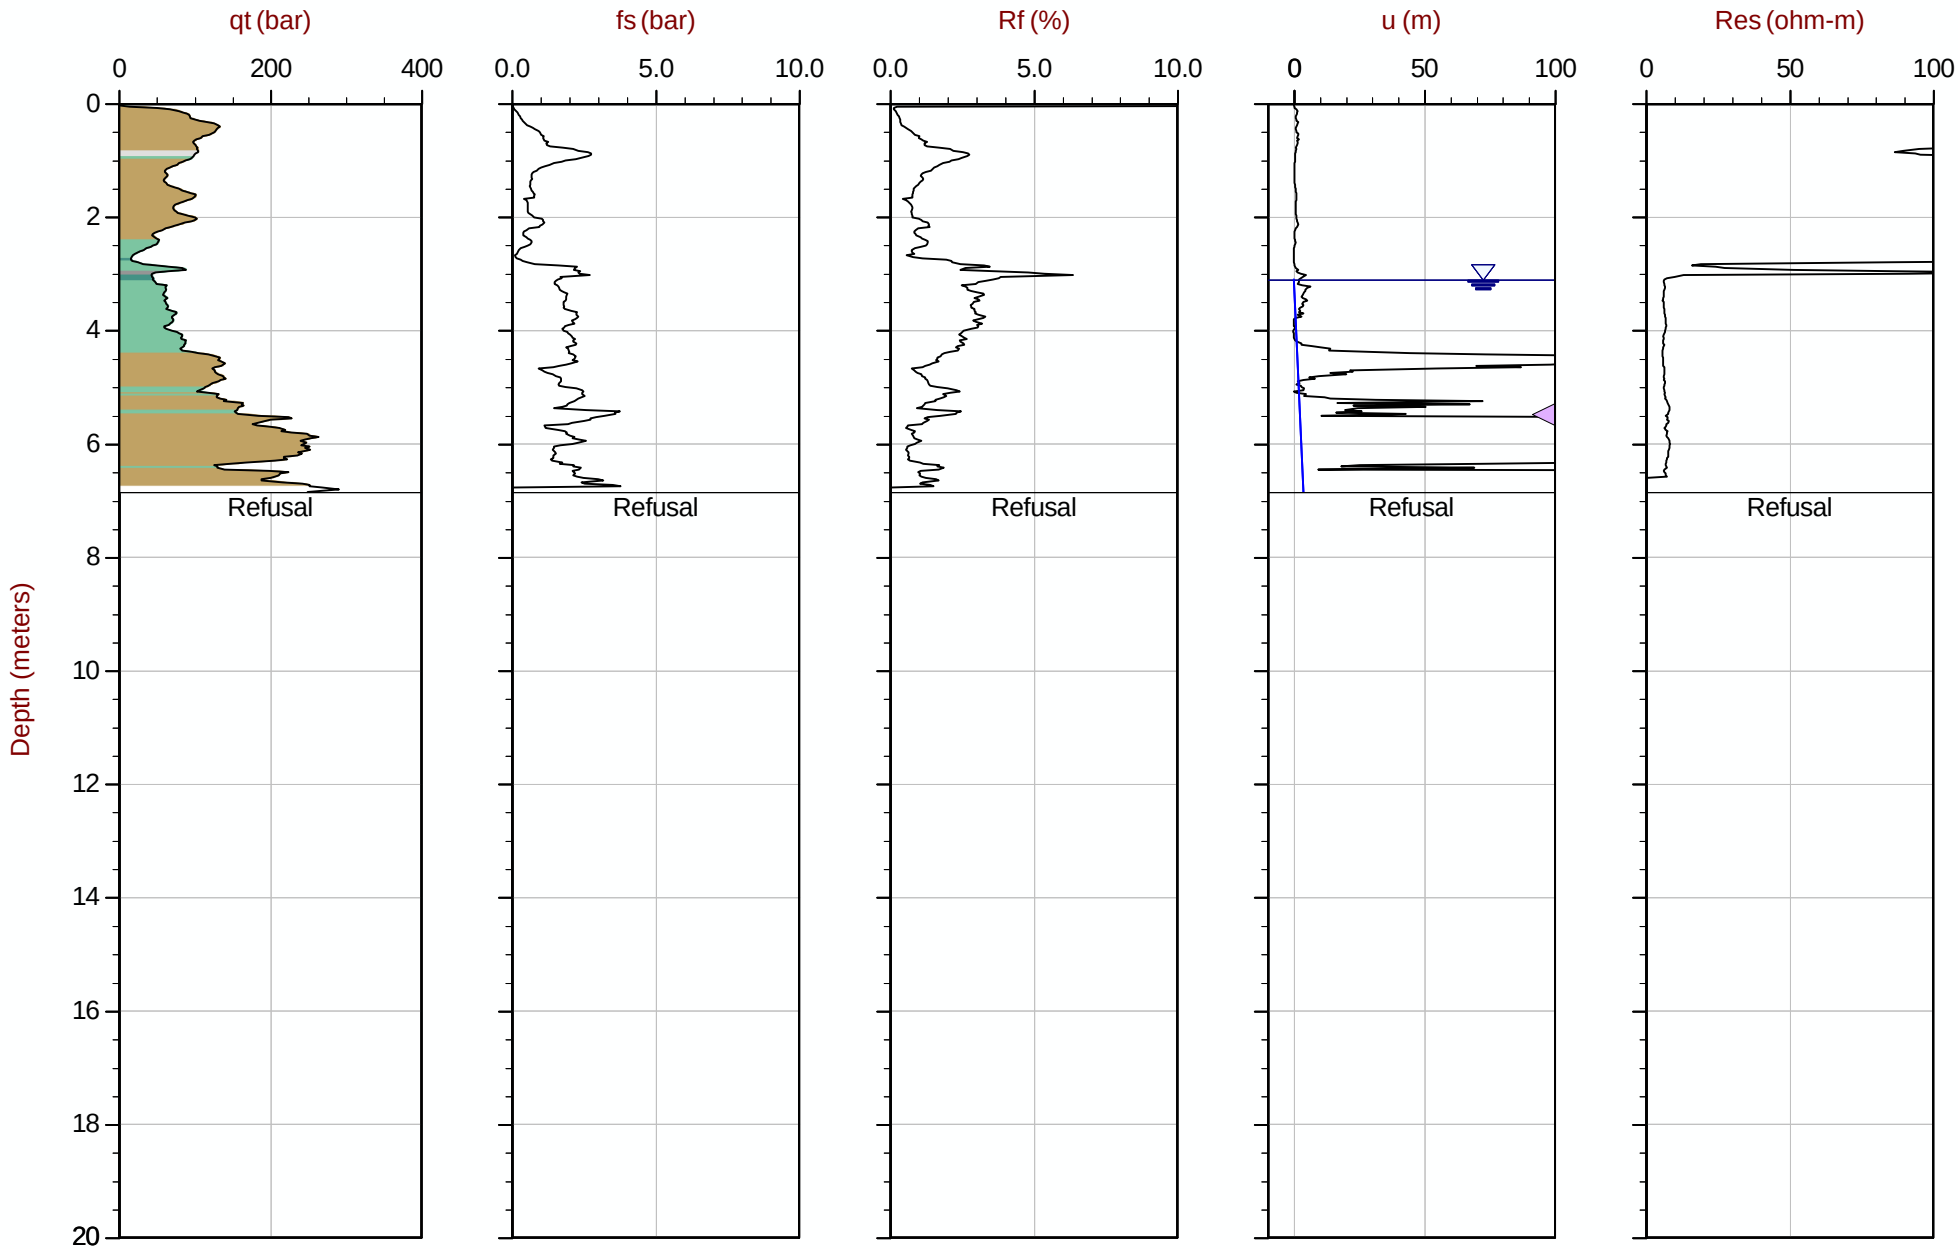

Max Depth: 6.850 m / 22.47 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT265.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611968m E: 416923m Elev: 768.596m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 11:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT266
Cone: 821:T1000F10U35 Area= 15cm2

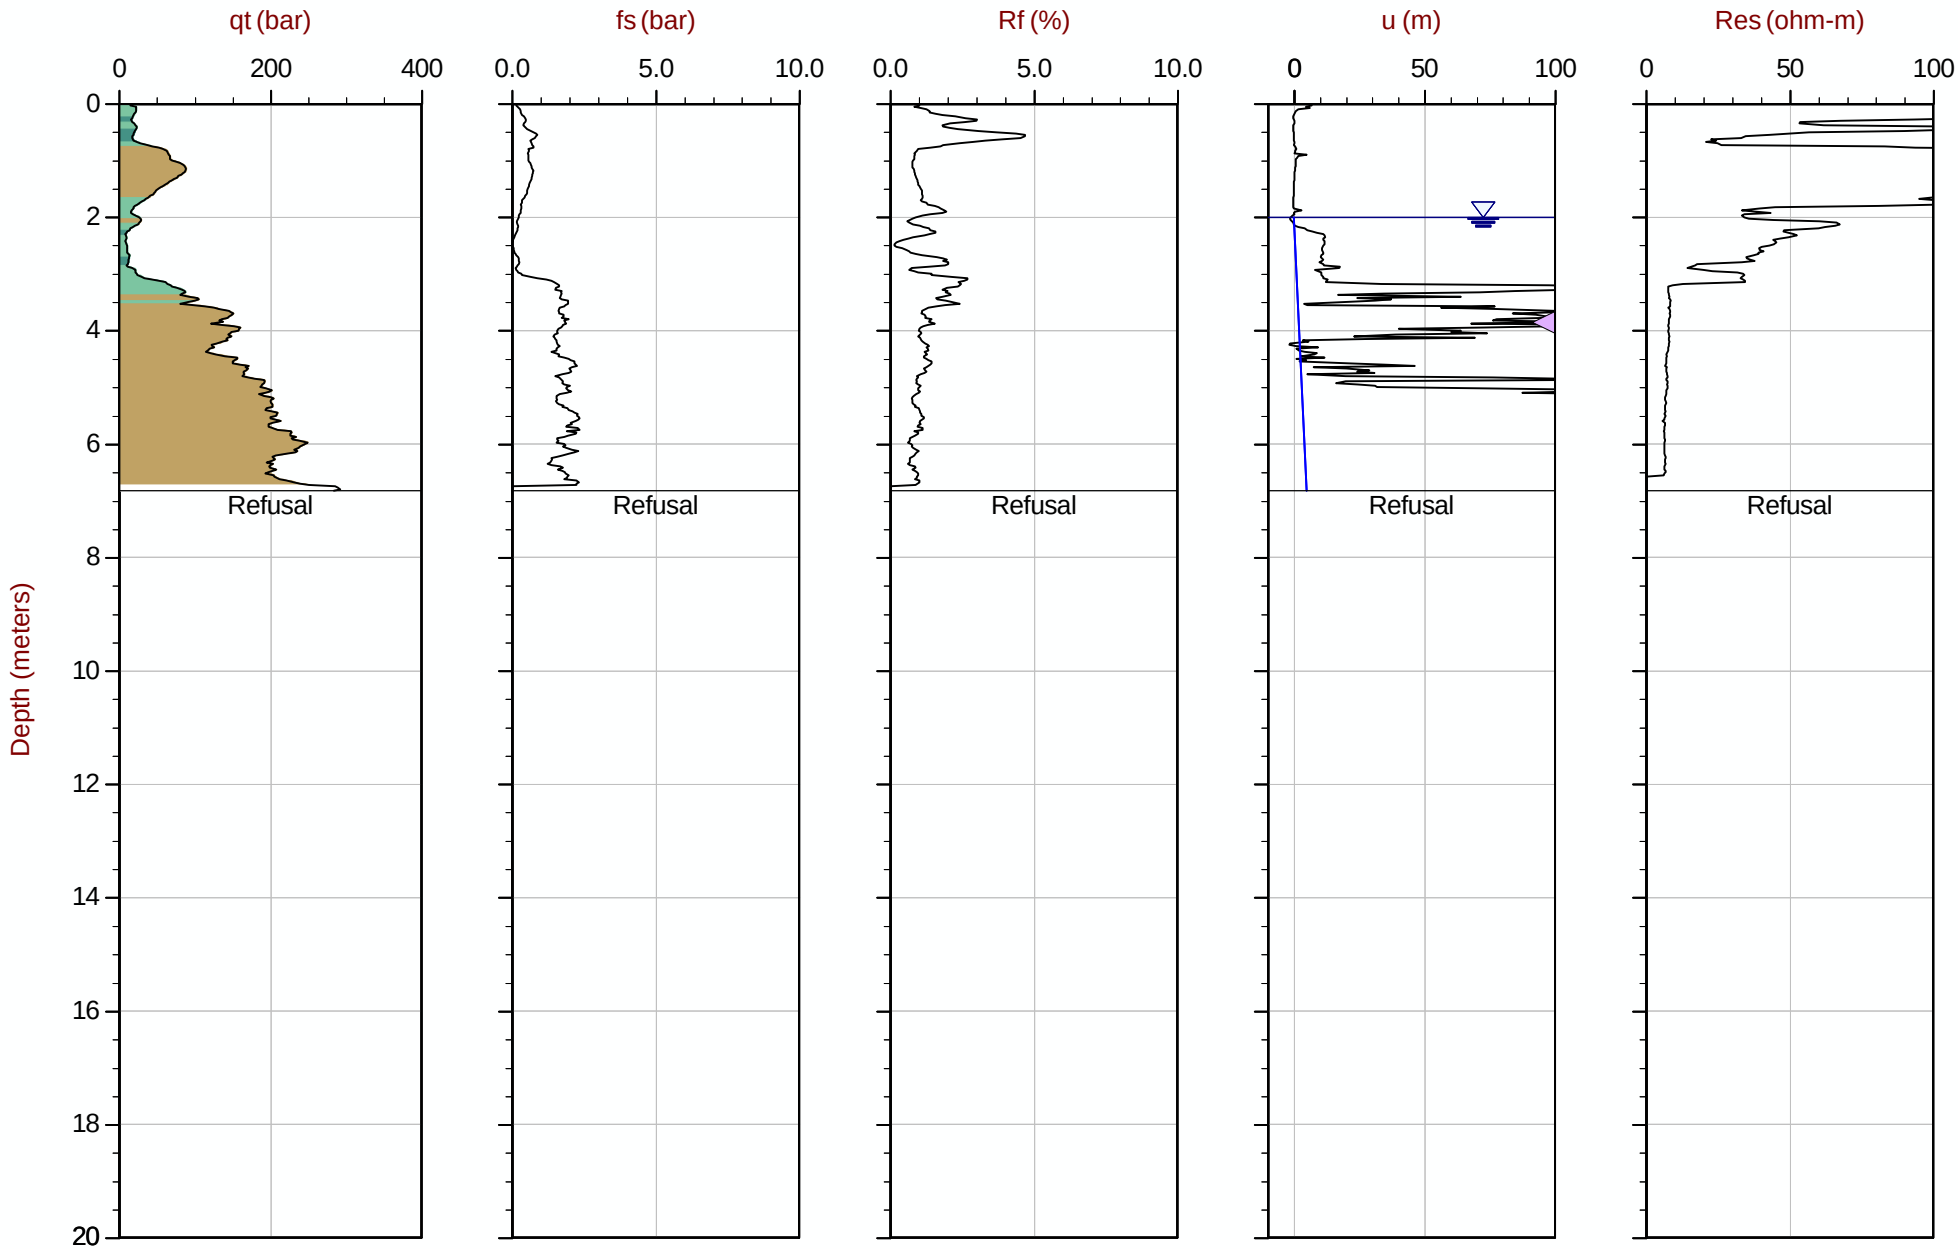

Max Depth: 6.825 m / 22.39 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT266.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611868m E: 416928m Elev: 767.825m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 12:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT267
Cone: 821:T1000F10U35 Area= 15cm2

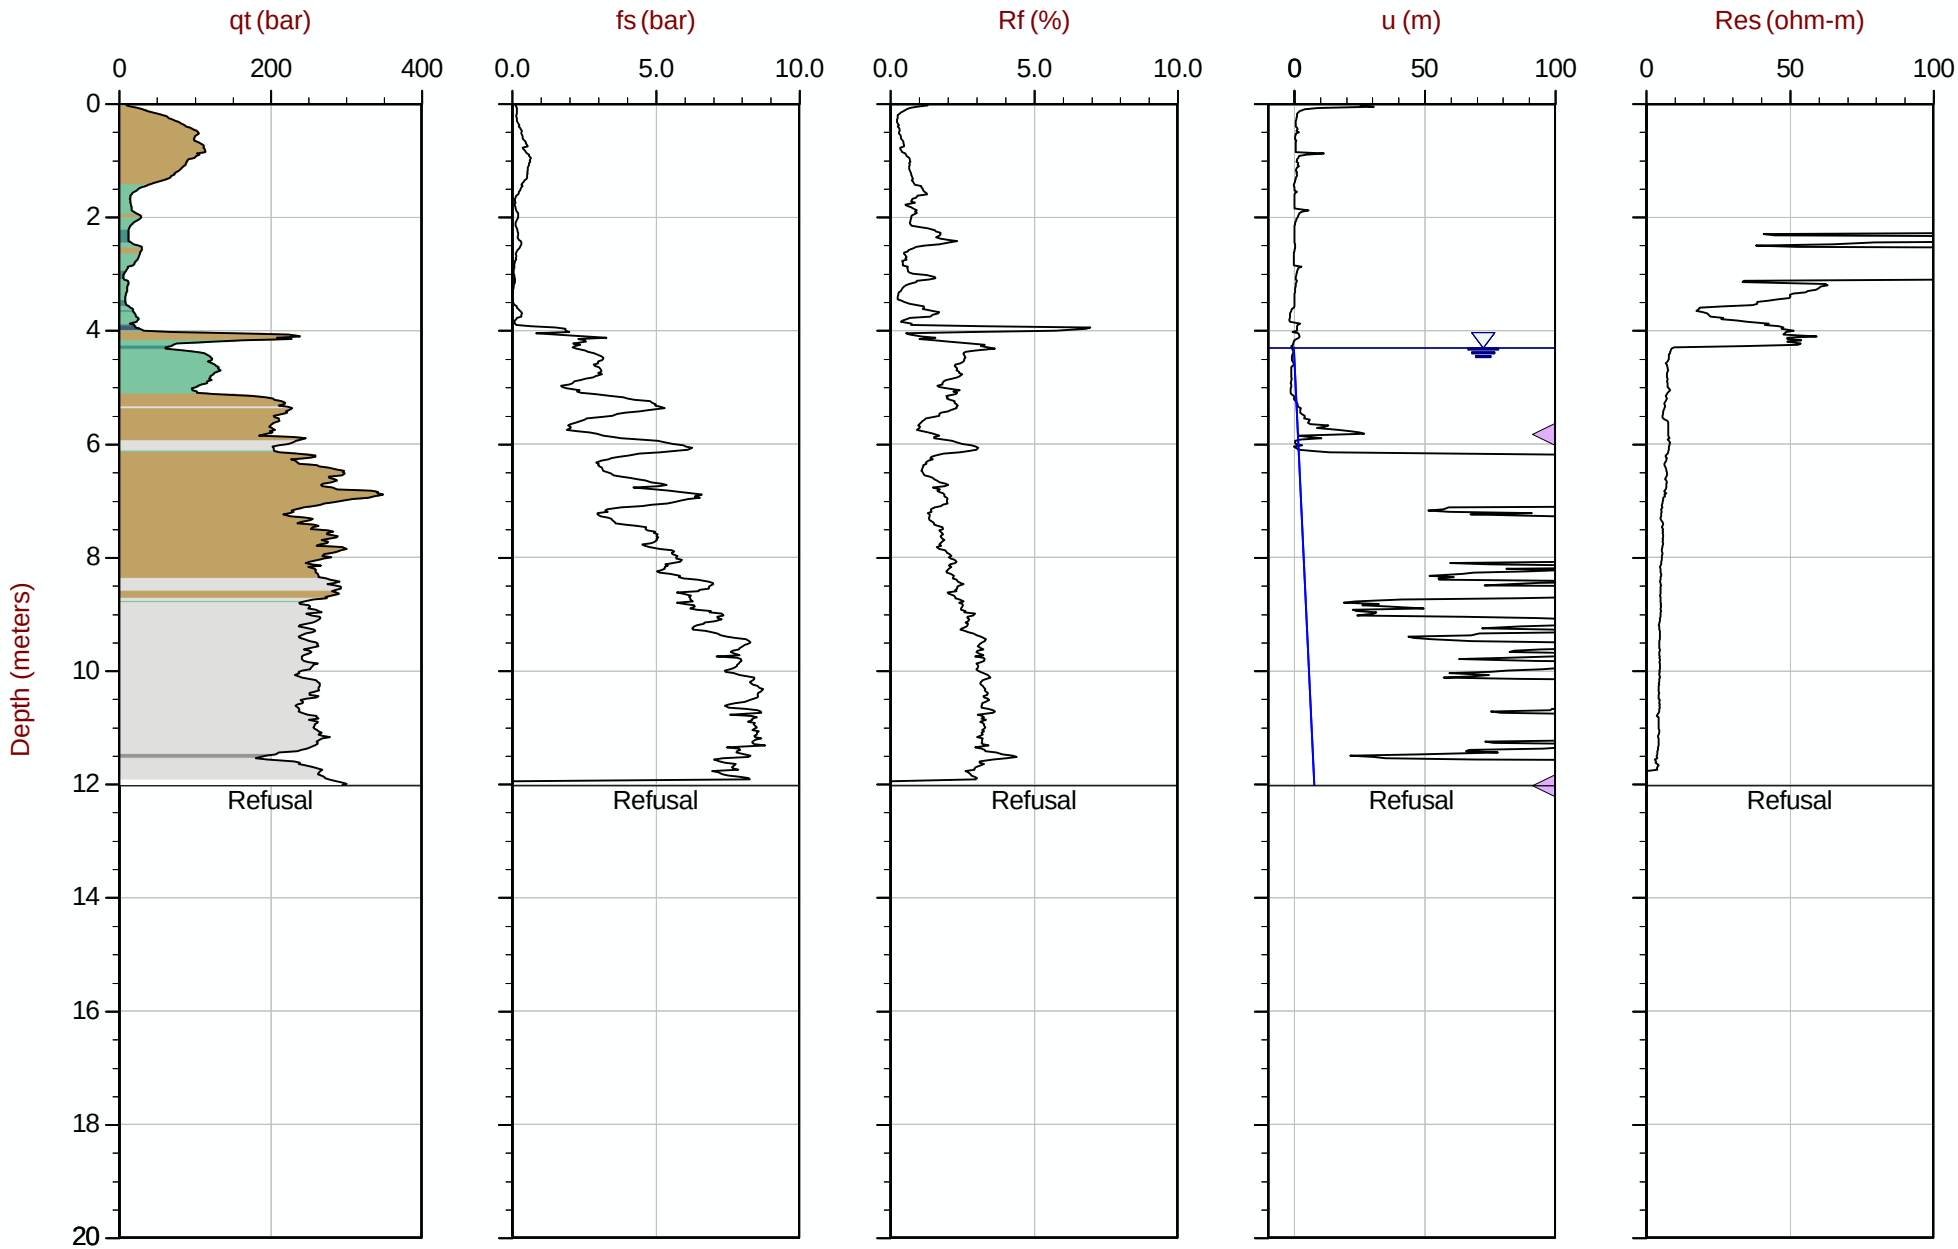

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT267.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611768m E: 416923m Elev: 769.139m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 13:49
Site: Brooks, Alberta

Sounding: RCPT22-22CPT269
Cone: 821:T1000F10U35 Area= 15cm2

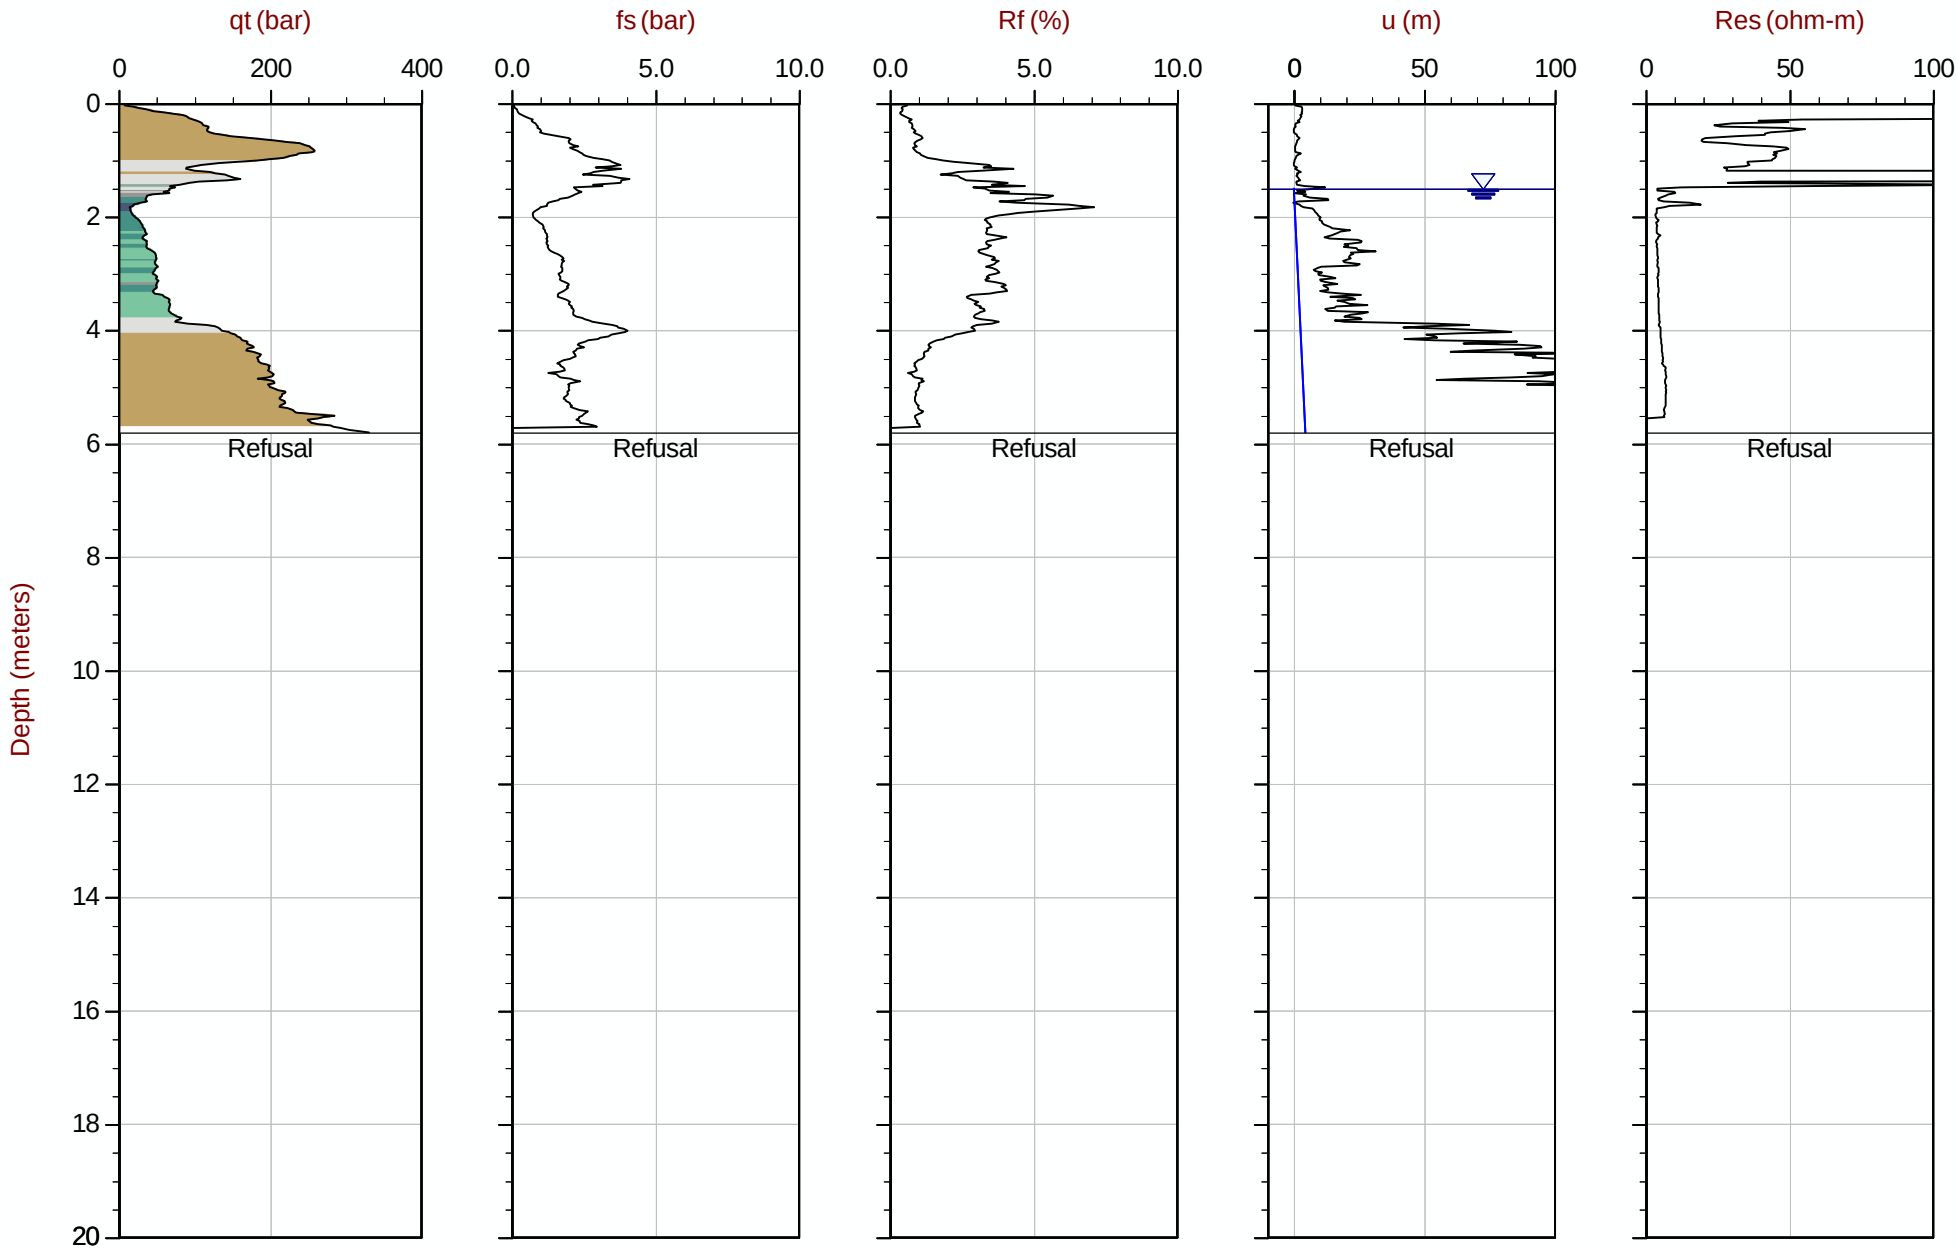

Max Depth: 5.800 m / 19.03 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT269.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611568m E: 416917m Elev: 767.995m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 14:40
Site: Brooks, Alberta

Sounding: RCPT22-22CPT270
Cone: 821:T1000F10U35 Area= 15cm2

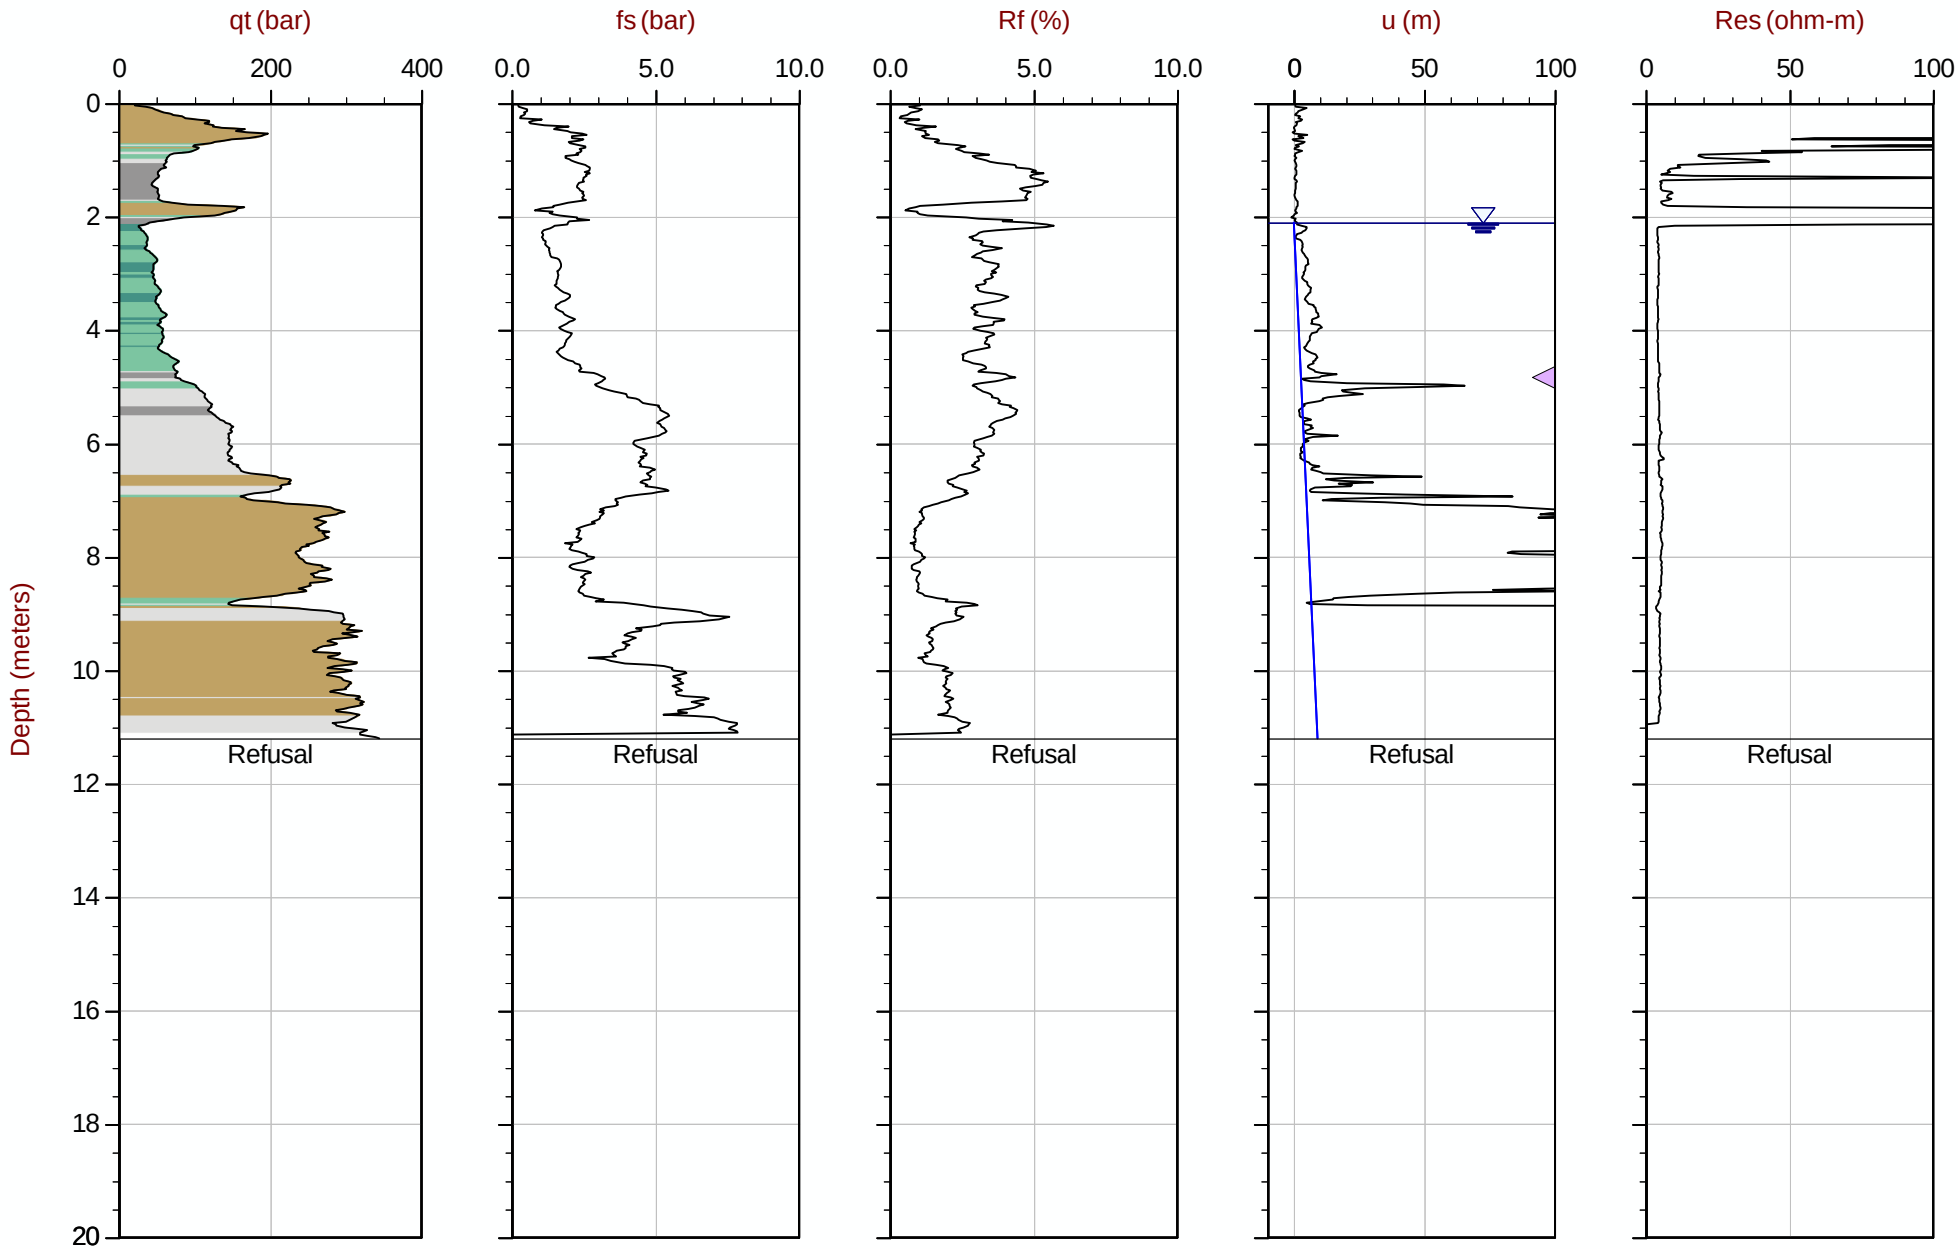

Max Depth: 11.200 m / 36.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT270.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611468m E: 416921m Elev: 768.473m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 15:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT271
Cone: 821:T1000F10U35 Area= 15cm2

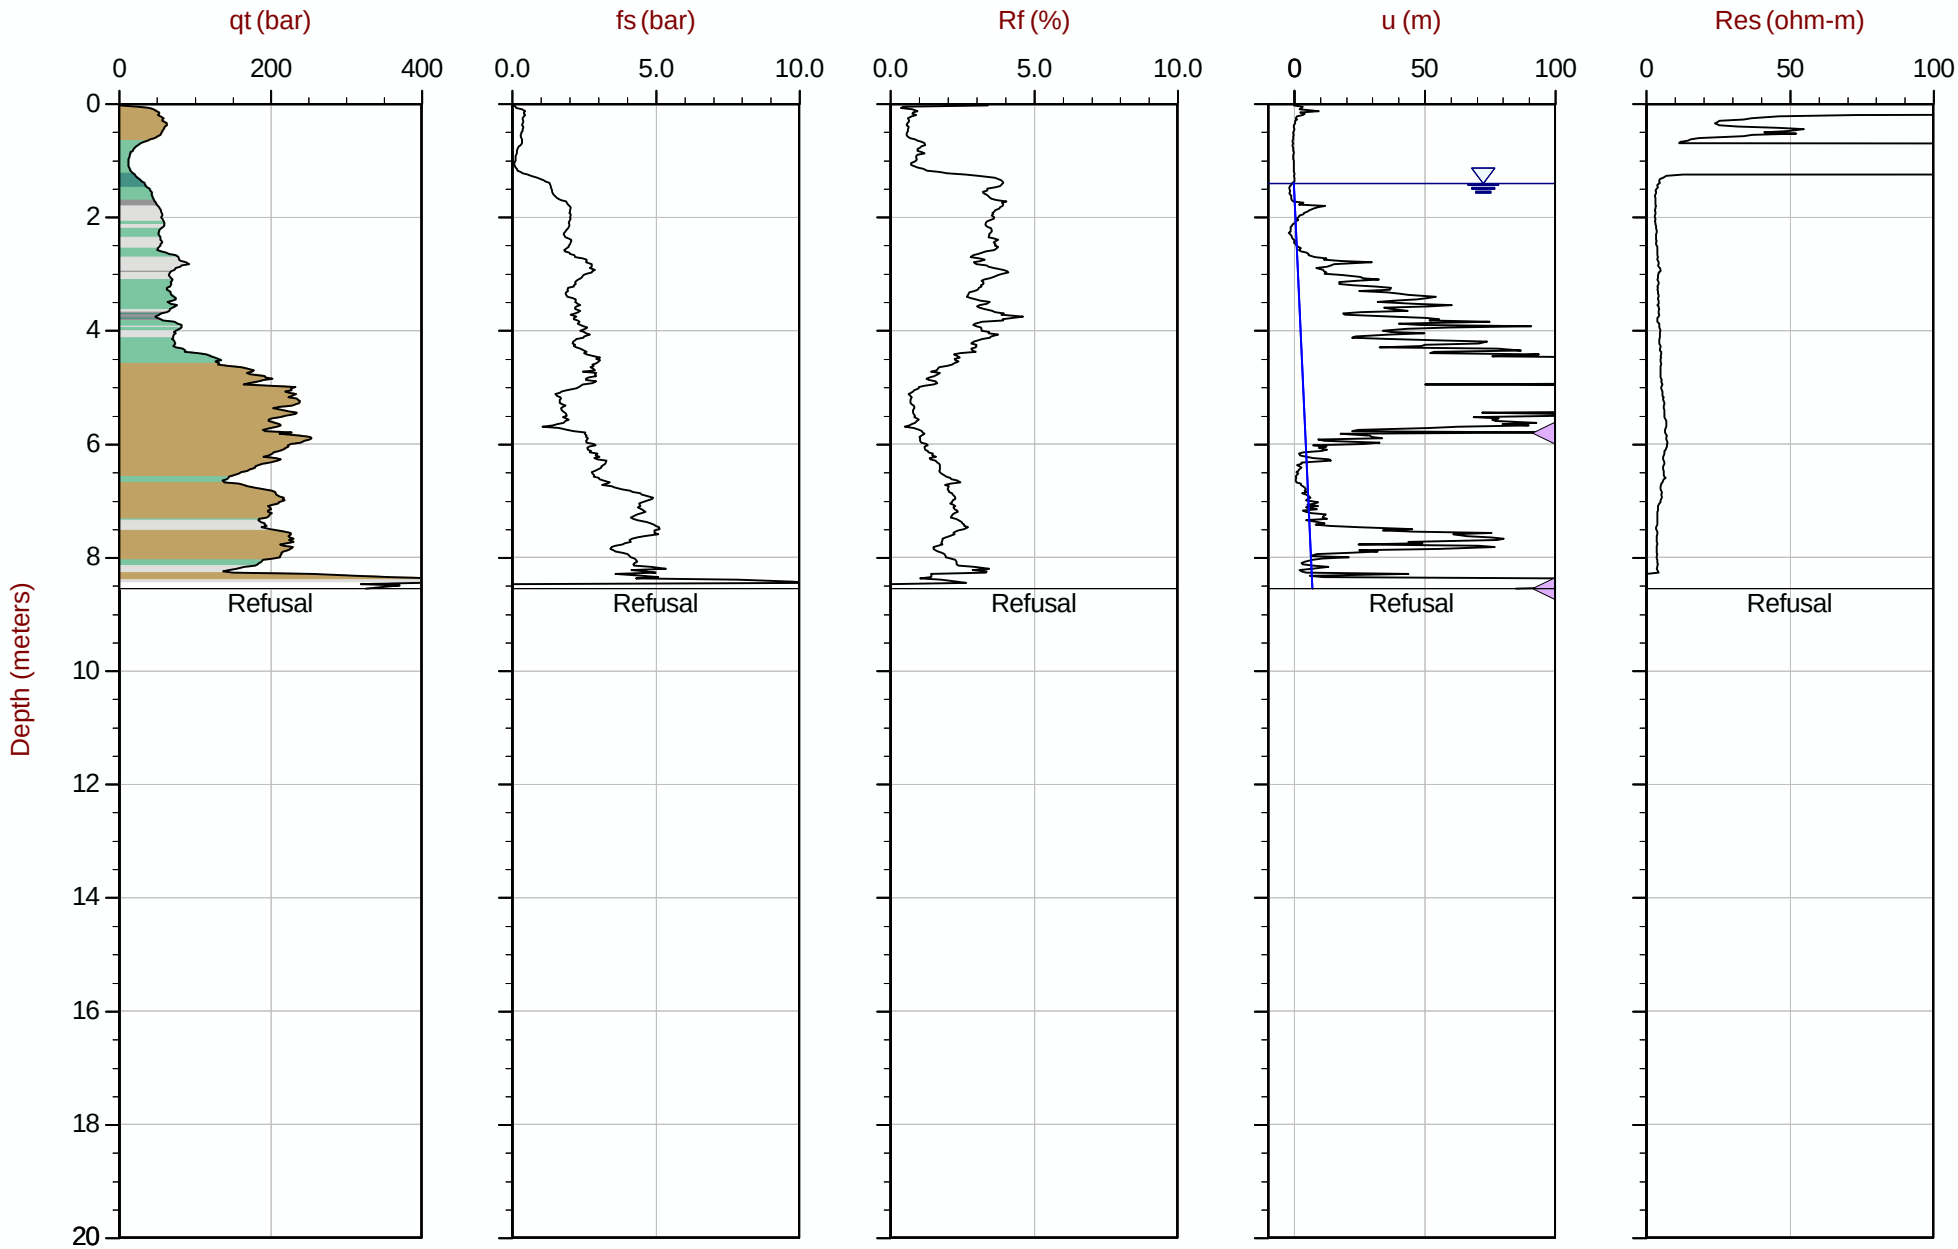

Max Depth: 8.550 m / 28.05 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT271.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611368m E: 416929m Elev: 765.259m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 08:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT272
Cone: 821:T1000F10U35 Area= 15cm2

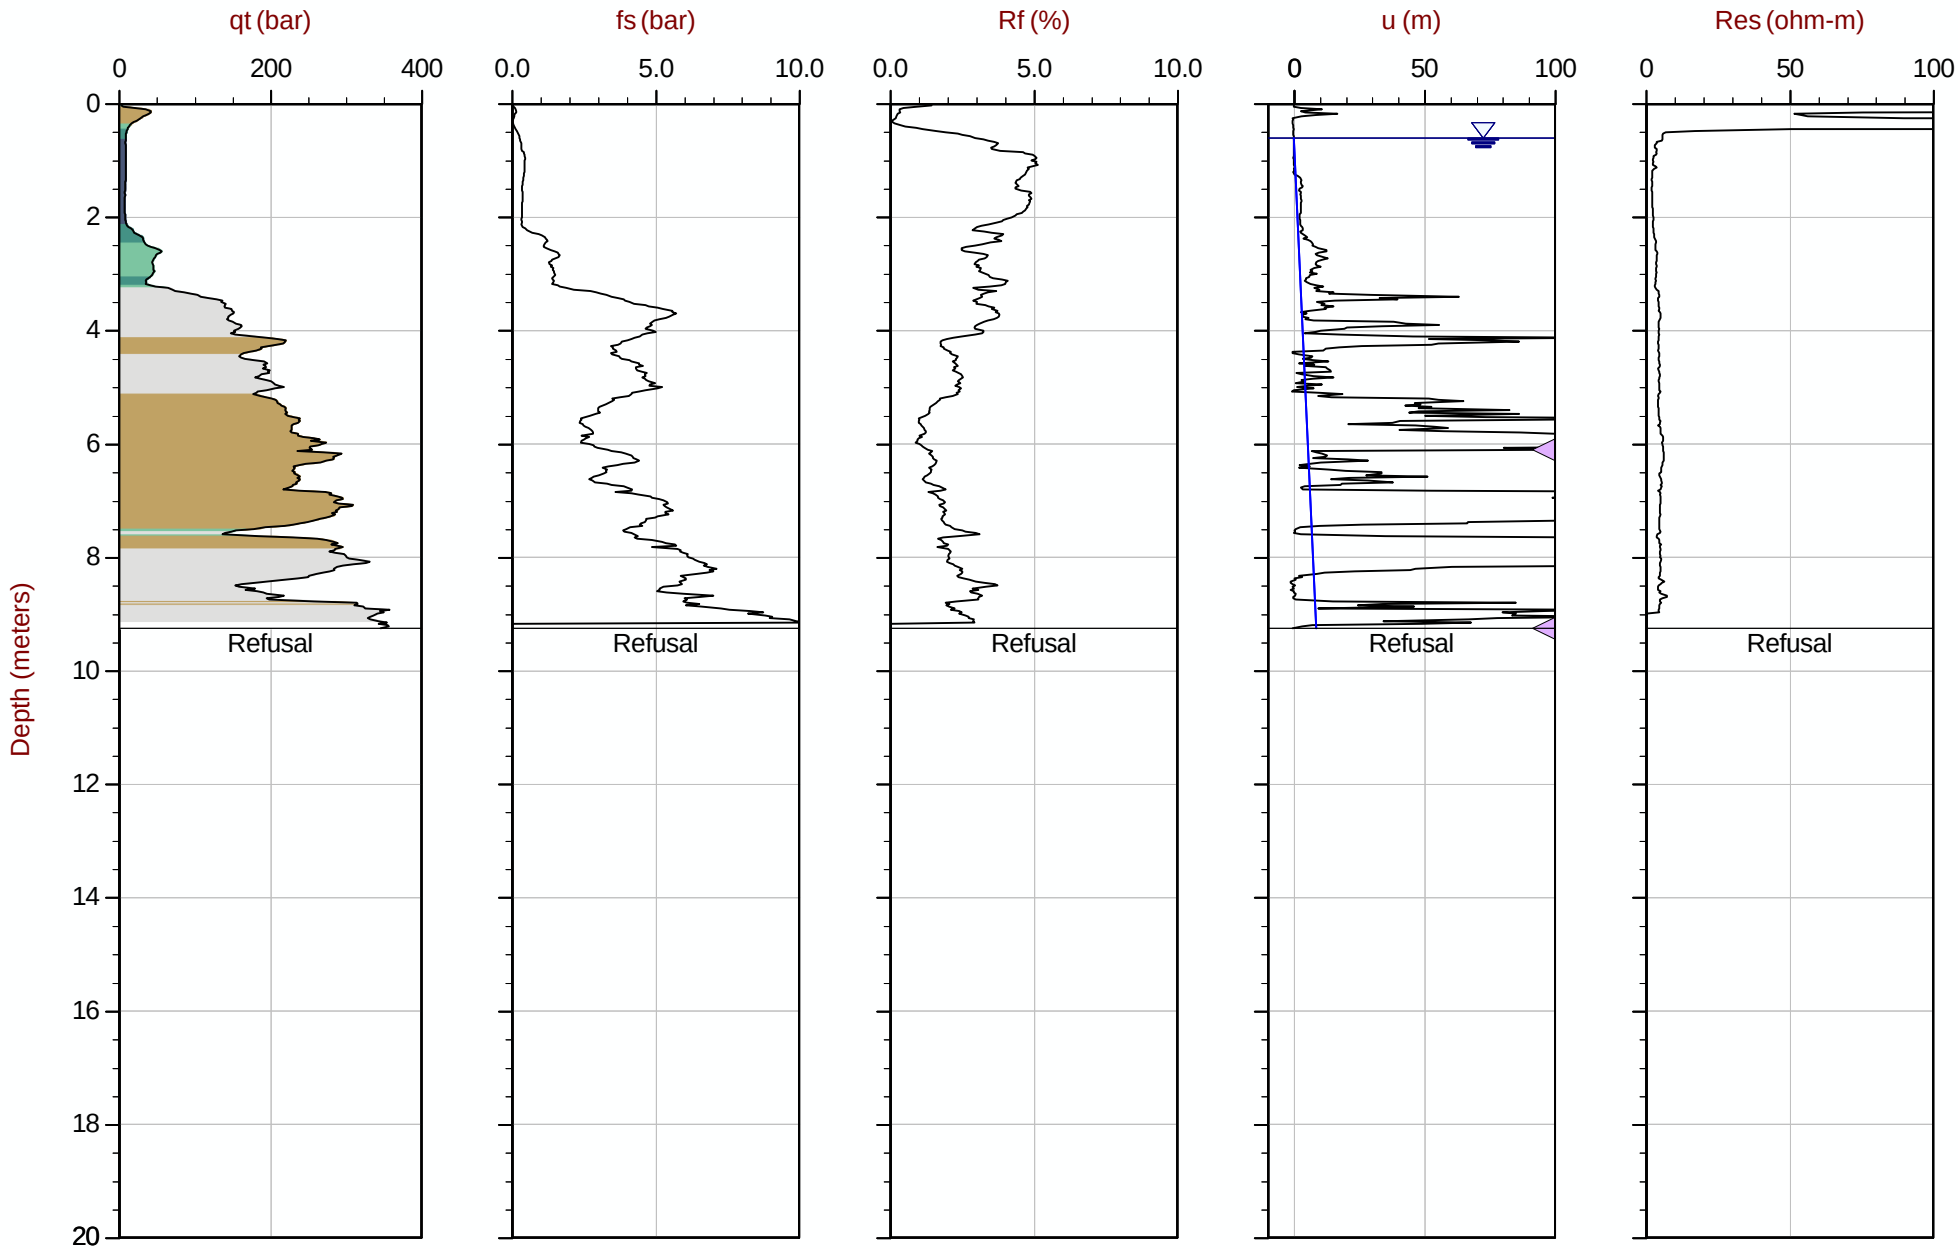

Max Depth: 9.250 m / 30.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT272.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611268m E: 416927m Elev: 764.158m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 09:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT273
Cone: 821:T1000F10U35 Area= 15cm2

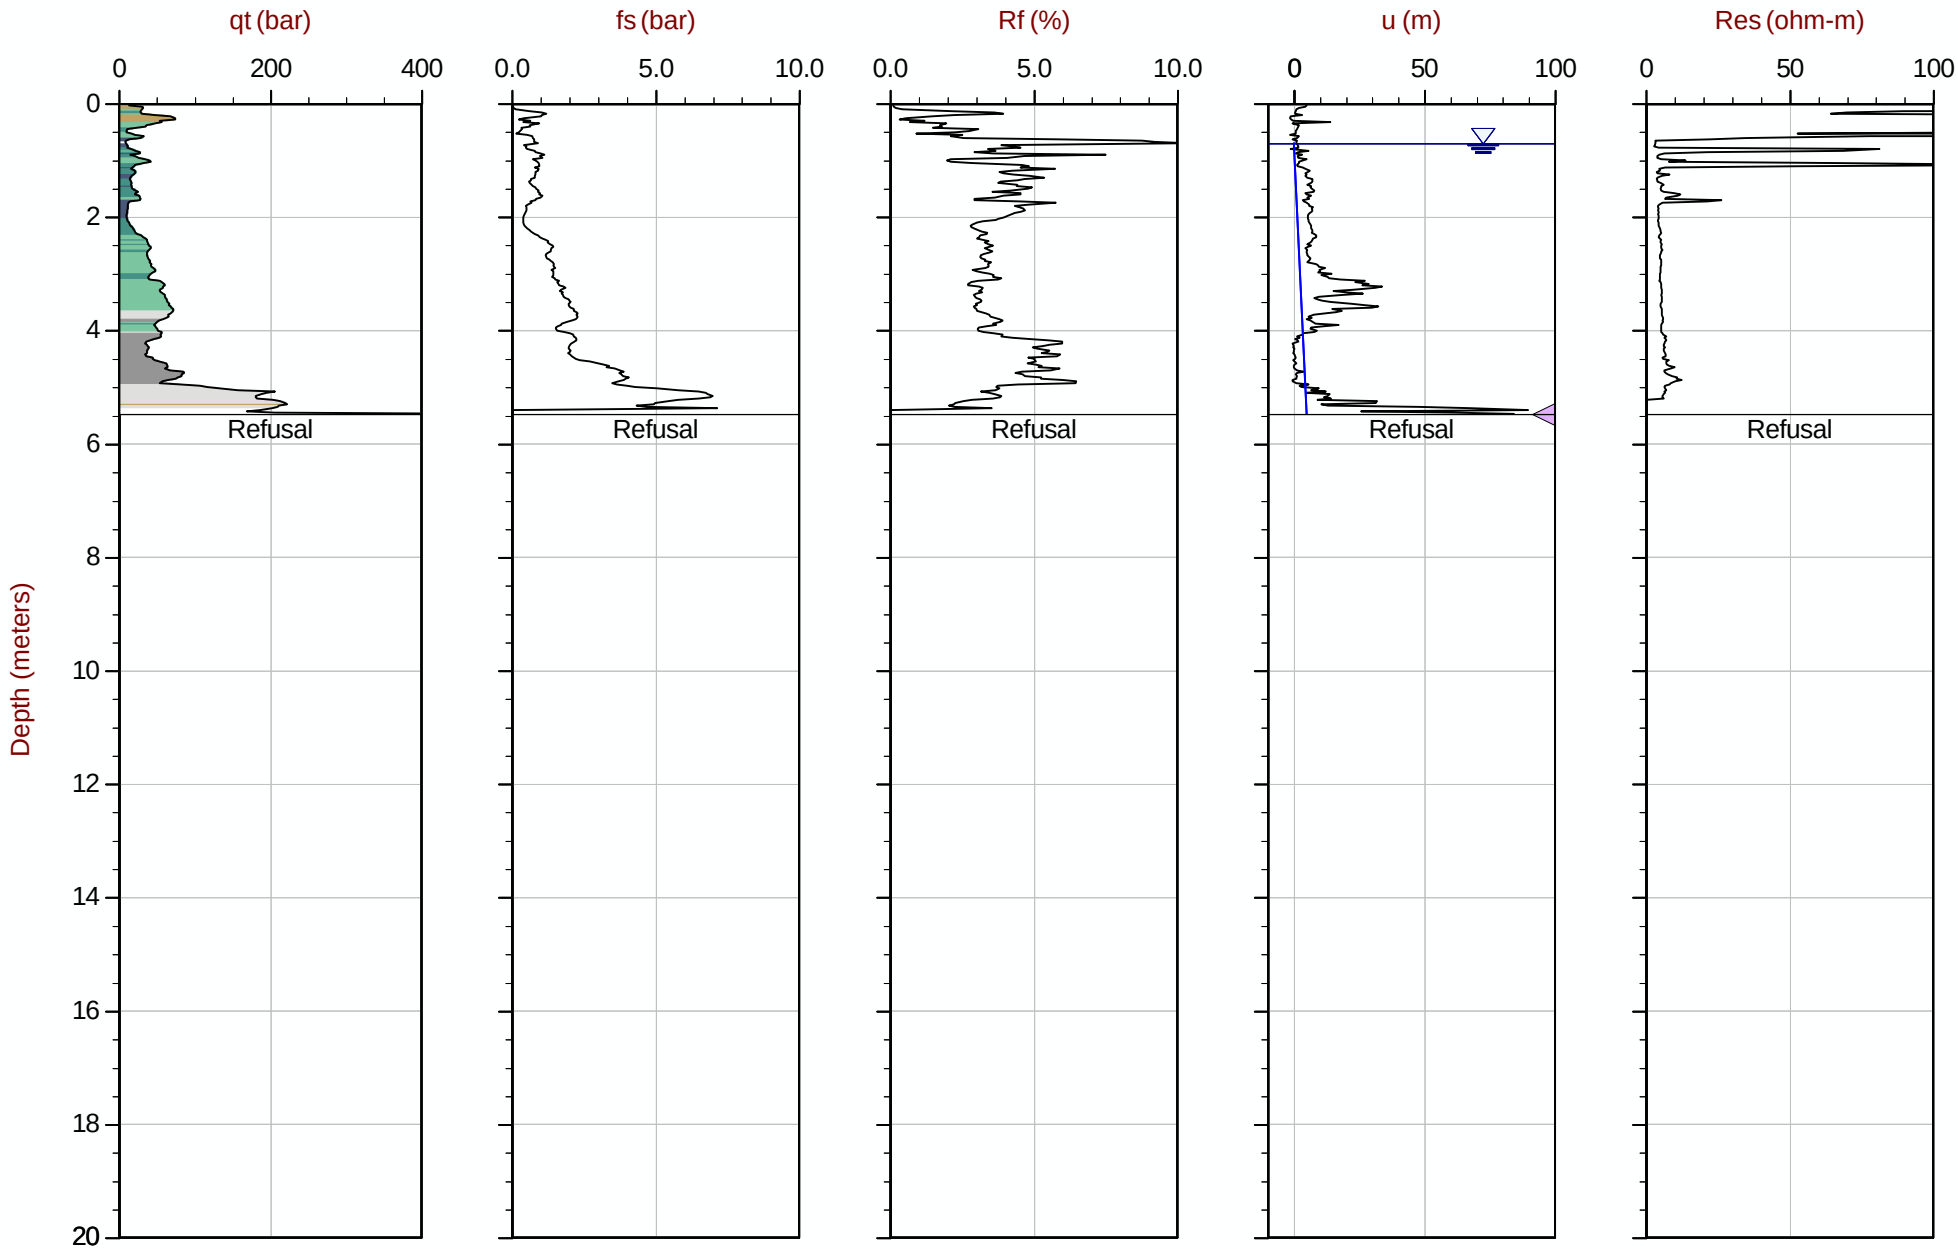

Max Depth: 5.475 m / 17.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT273.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611168m E: 416915m Elev: 765.344m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 17:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT274
Cone: 854:T1500F15U35 Area= 15cm2

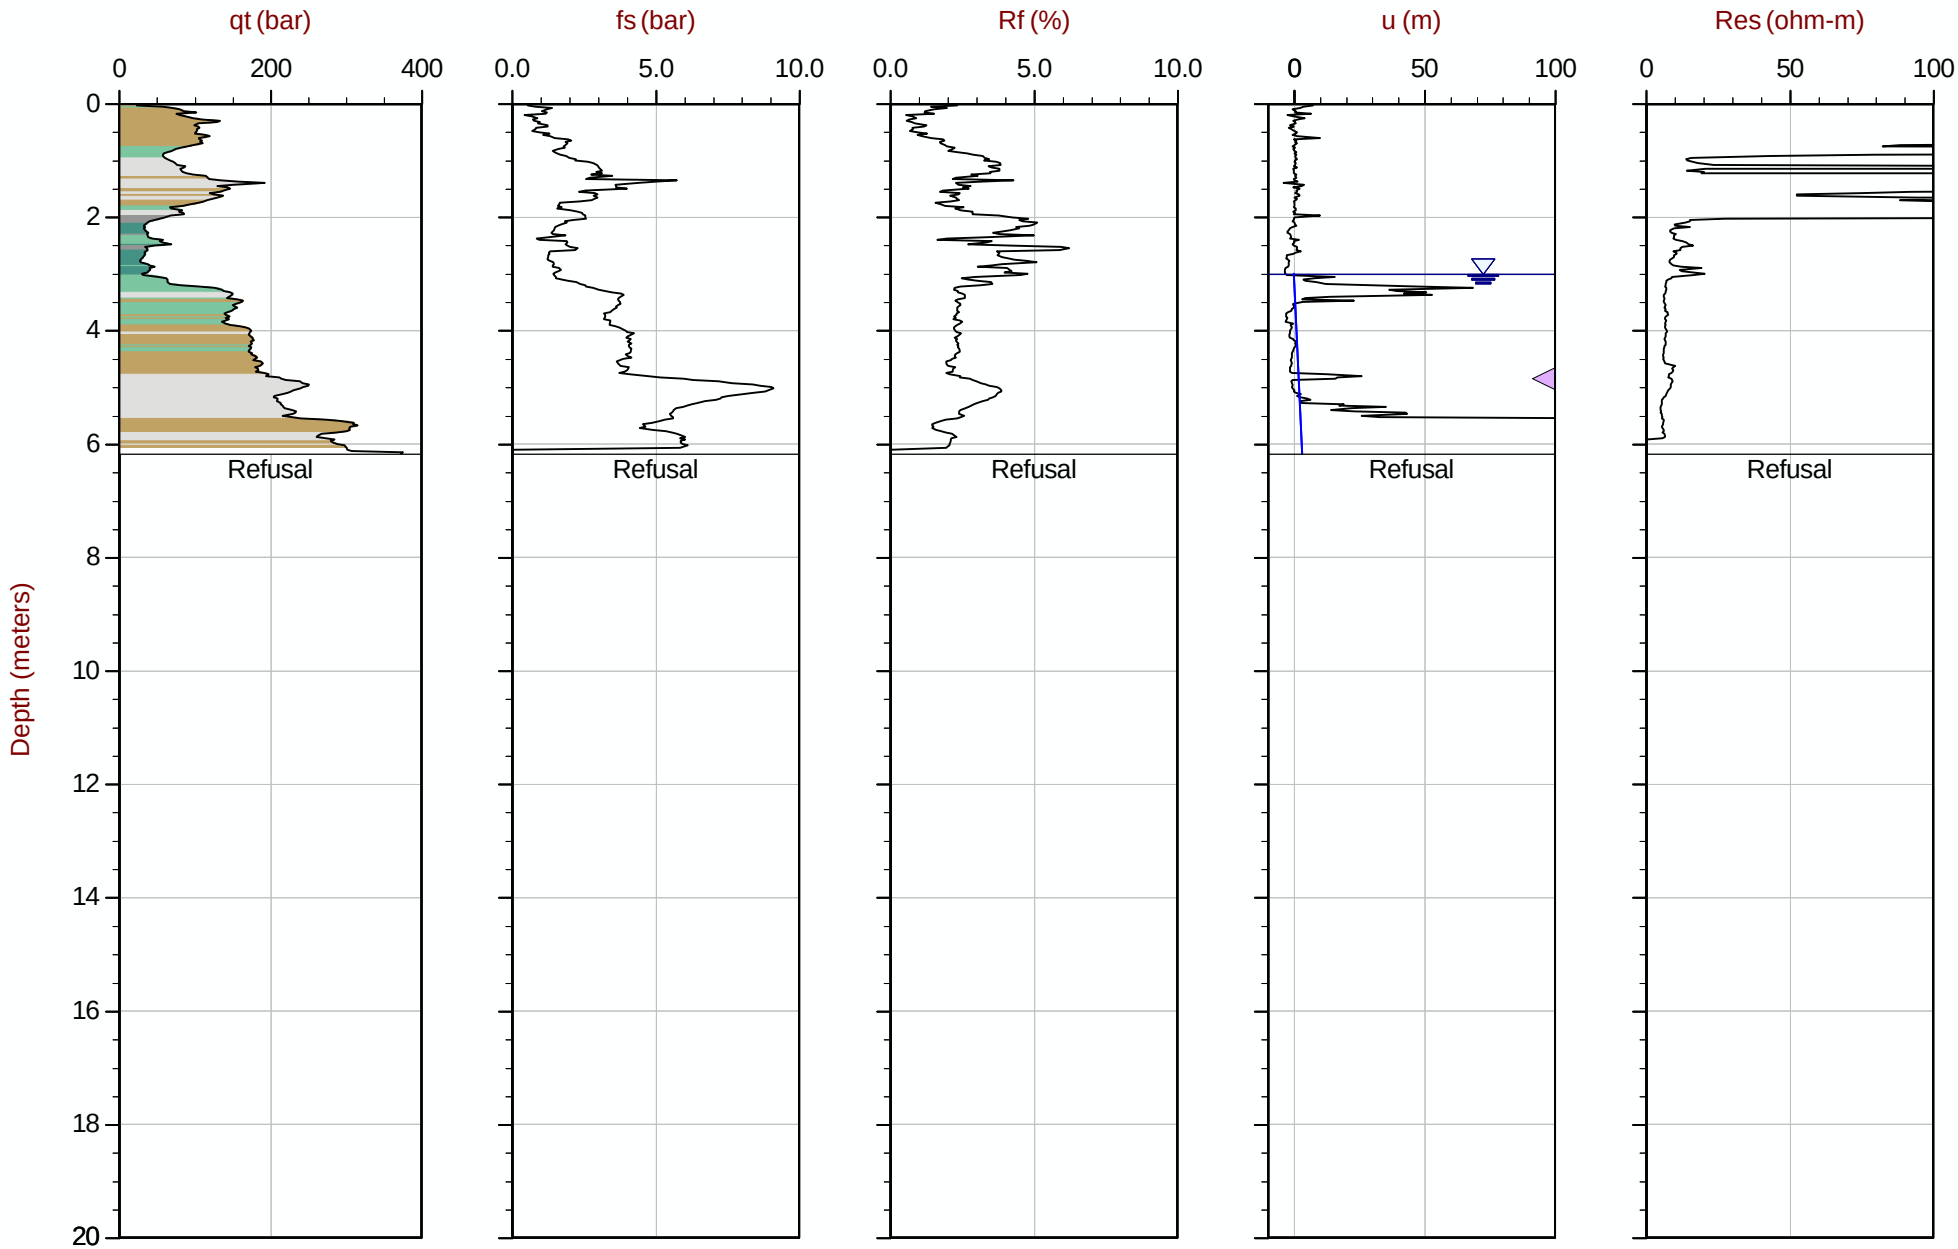

Max Depth: 6.175 m / 20.26 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT274.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611069m E: 416914m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 06:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT275
Cone: 854:T1500F15U35 Area= 15cm2

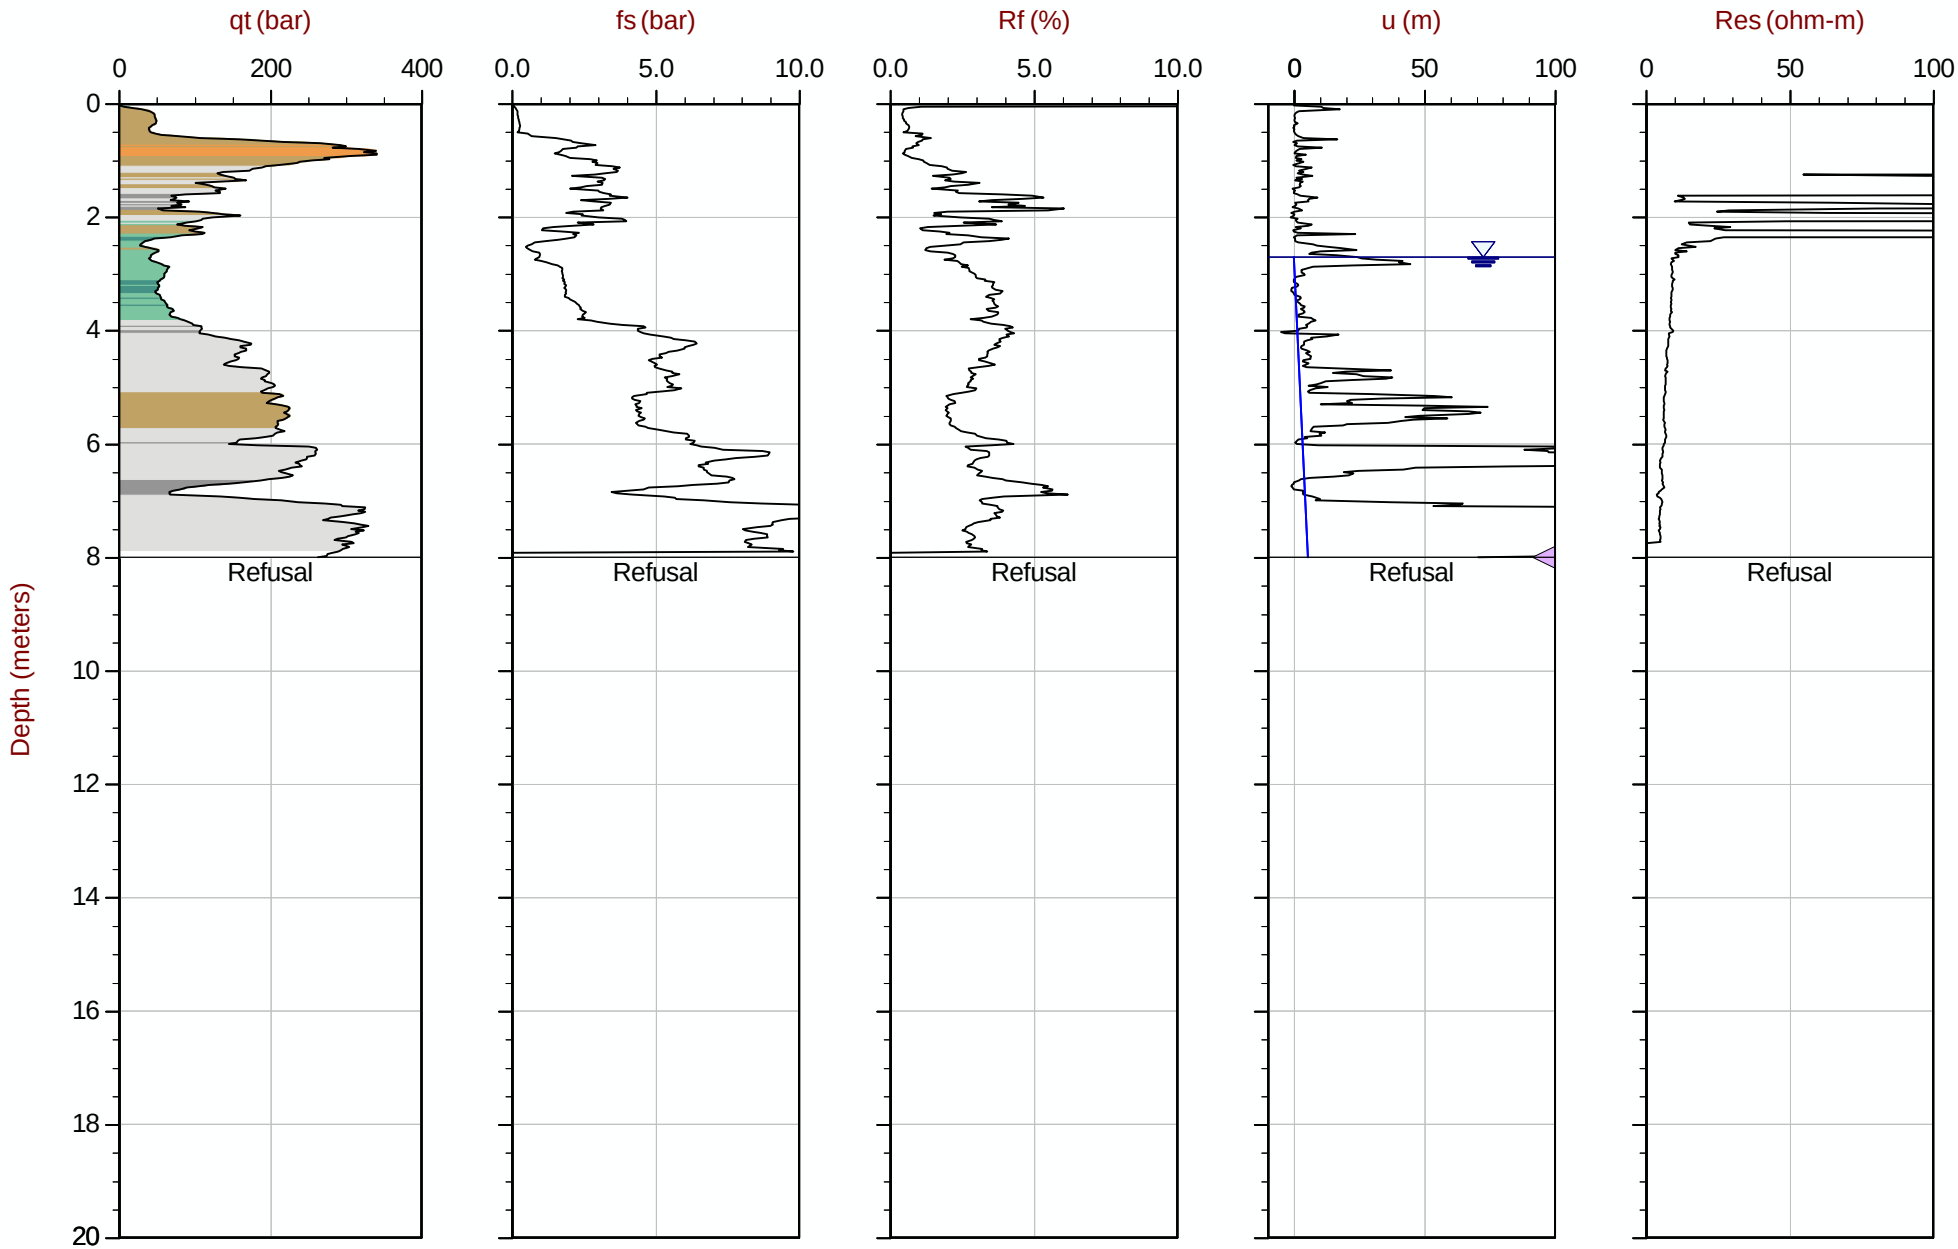

Max Depth: 8.000 m / 26.25 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT275.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610969m E: 416914m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 07:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT276
Cone: 854:T1500F15U35 Area= 15cm2

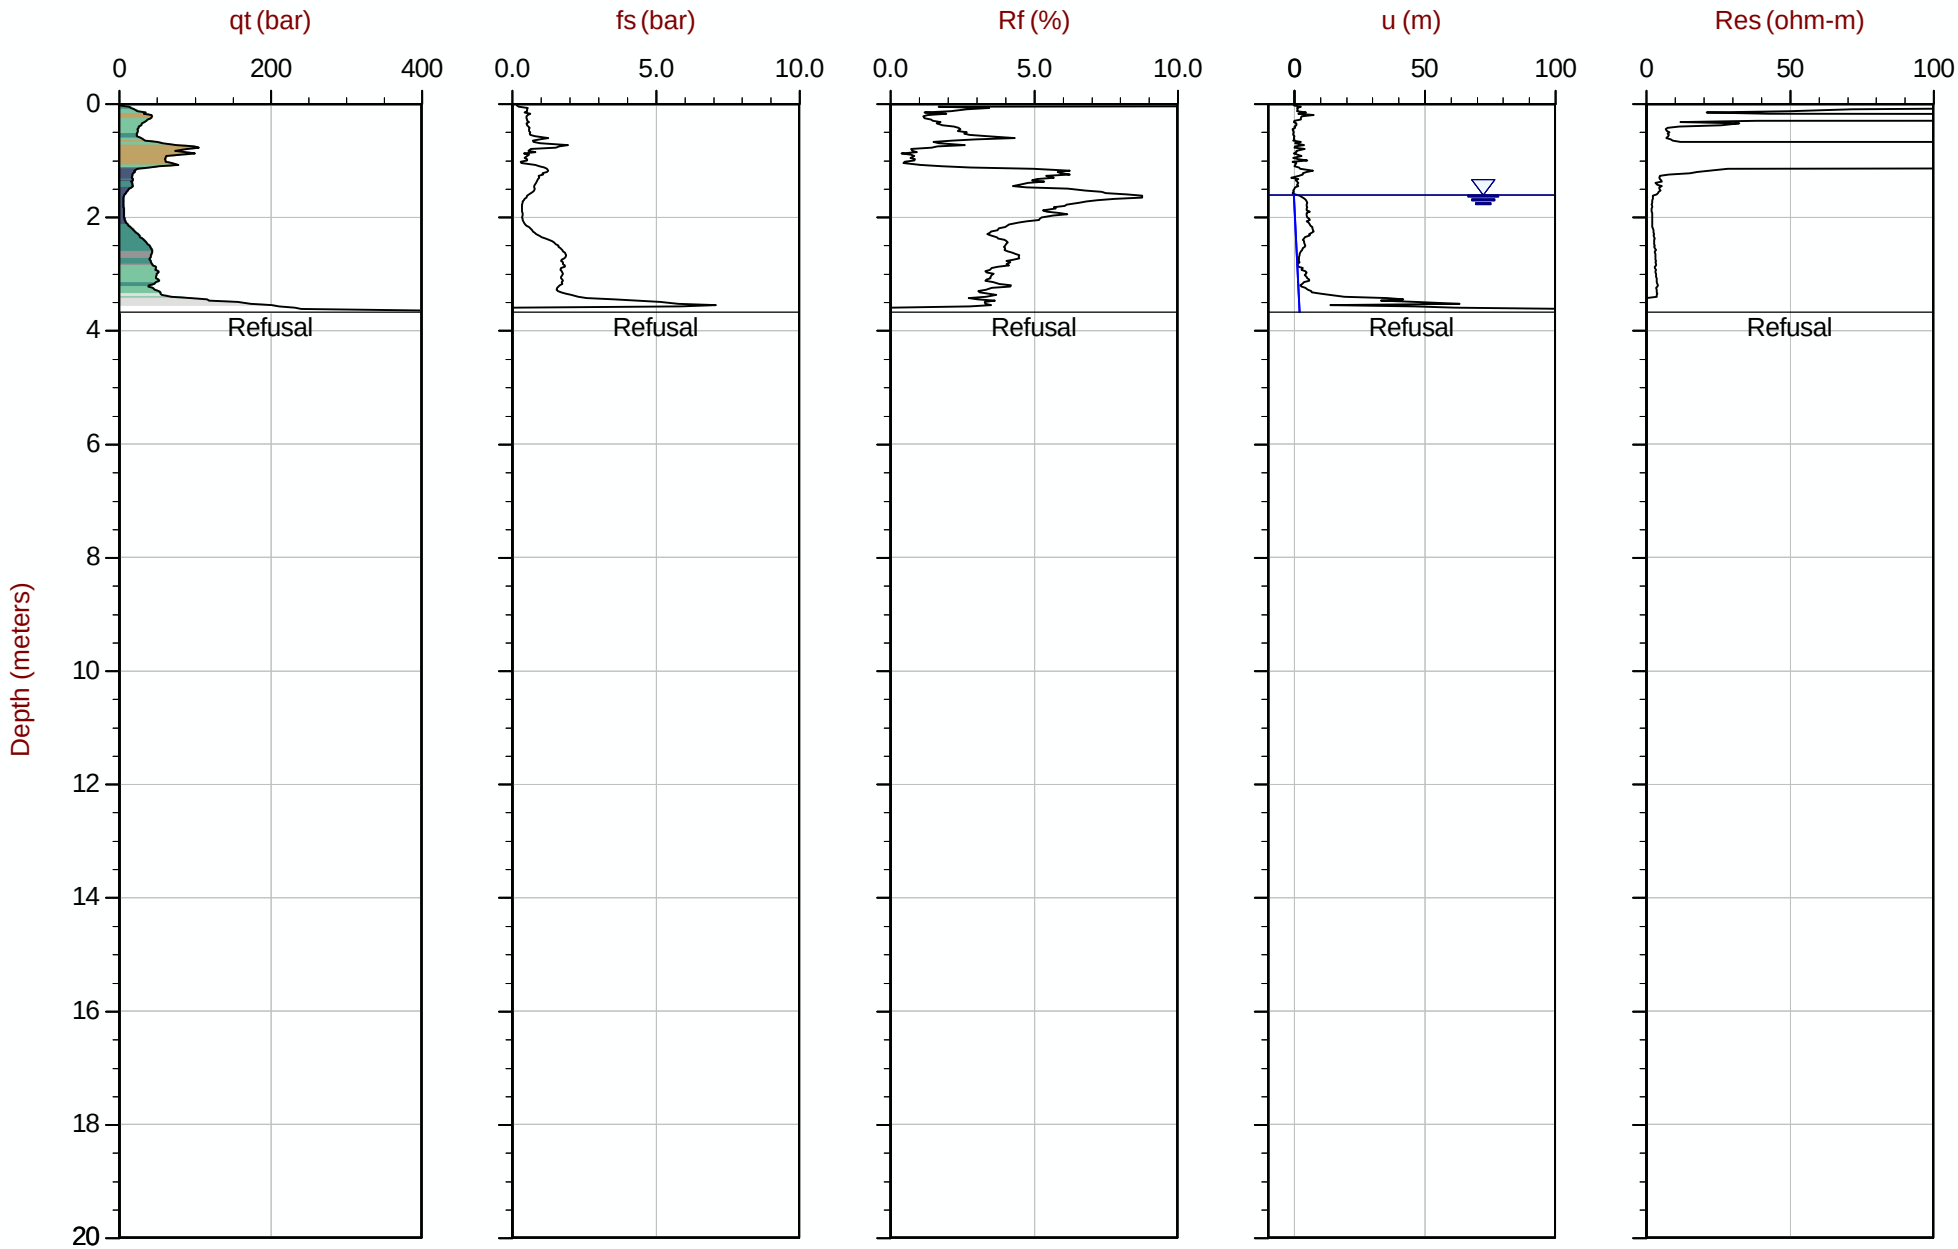

Max Depth: 3.675 m / 12.06 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT276.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610969m E: 416916m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 07:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT276B
Cone: 854:T1500F15U35 Area= 15cm2

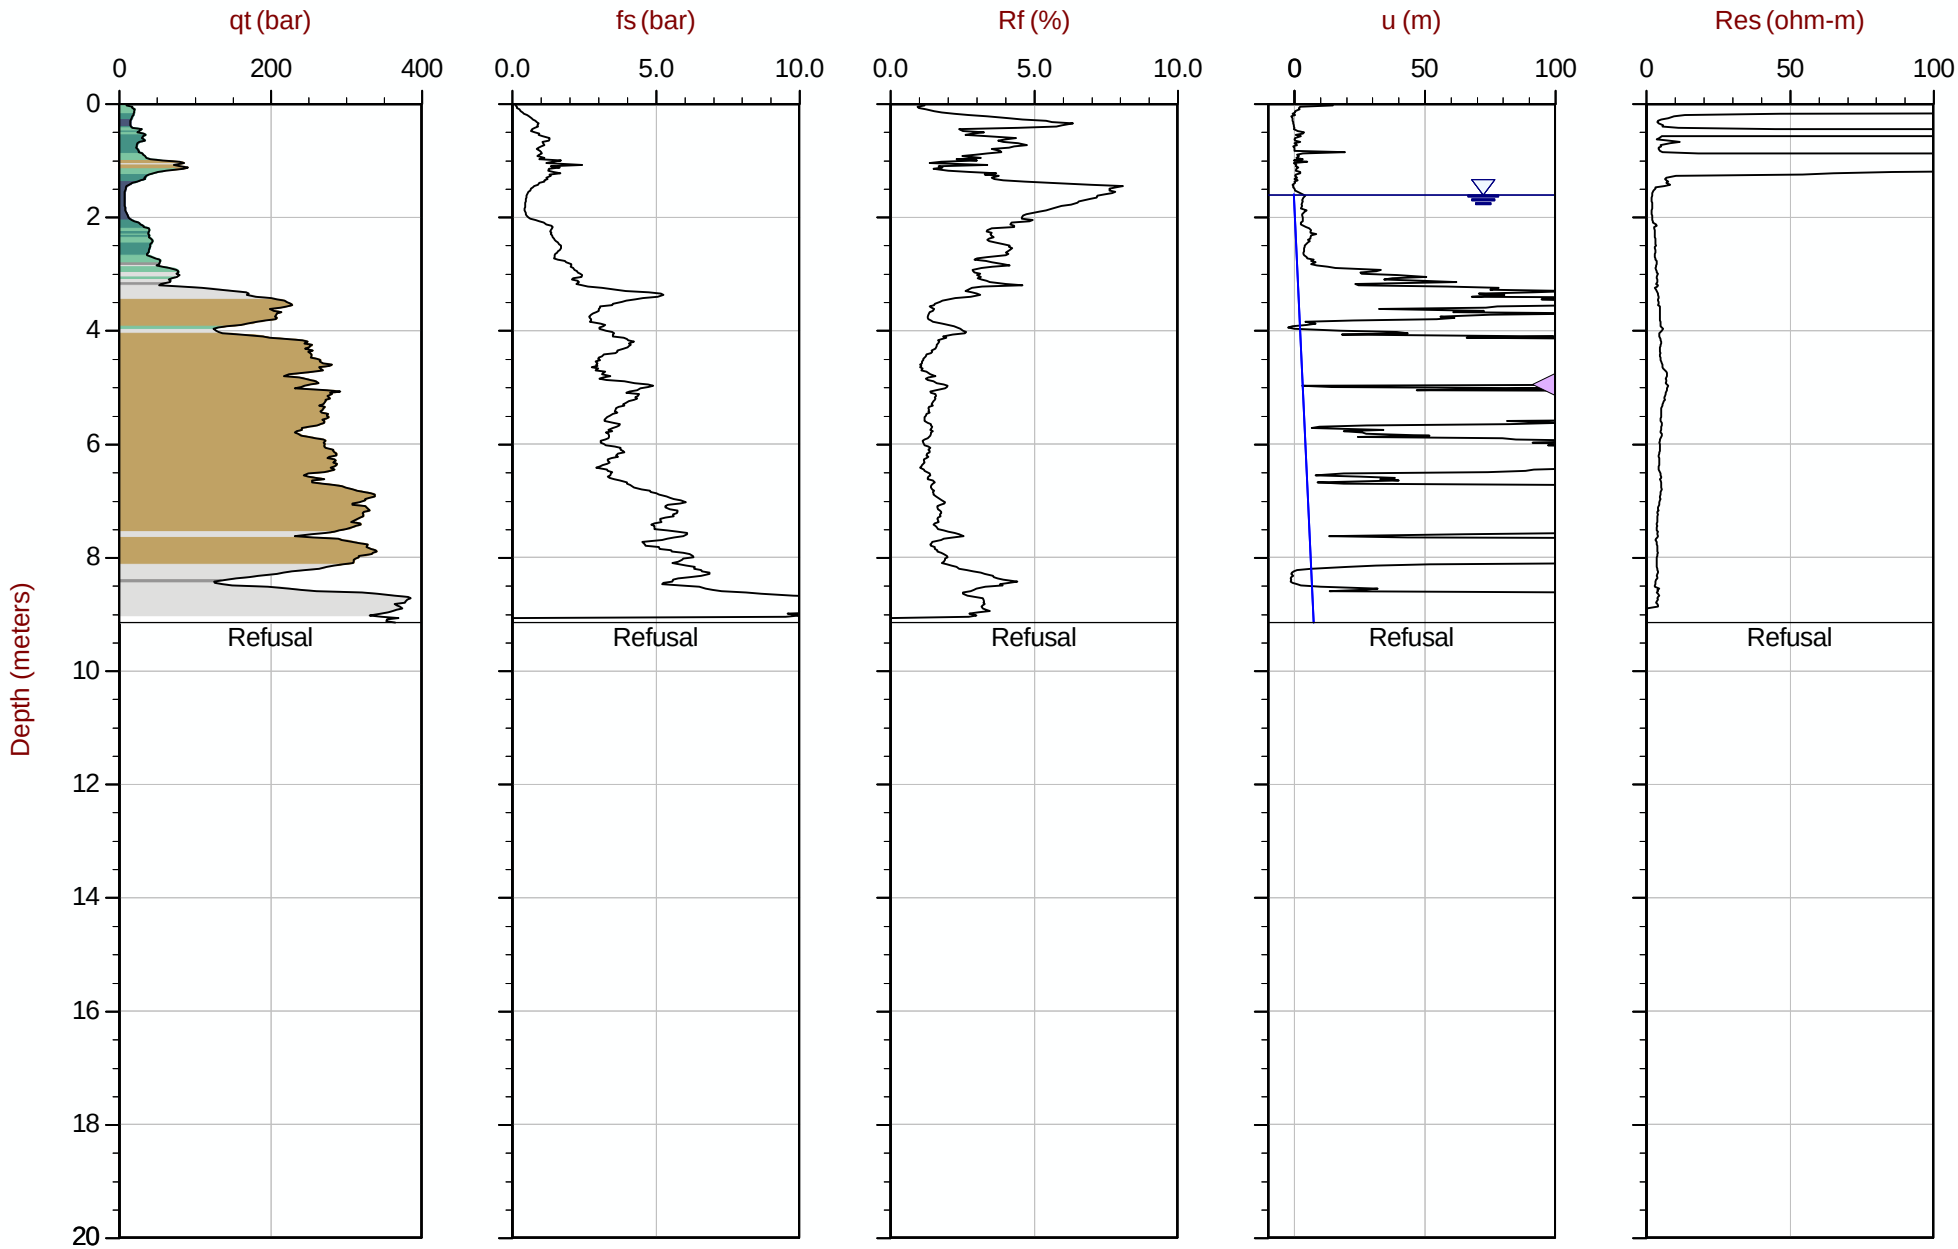

Max Depth: 9.150 m / 30.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT276B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610969m E: 416916m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 09:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT277
Cone: 854:T1500F15U35 Area= 15cm2

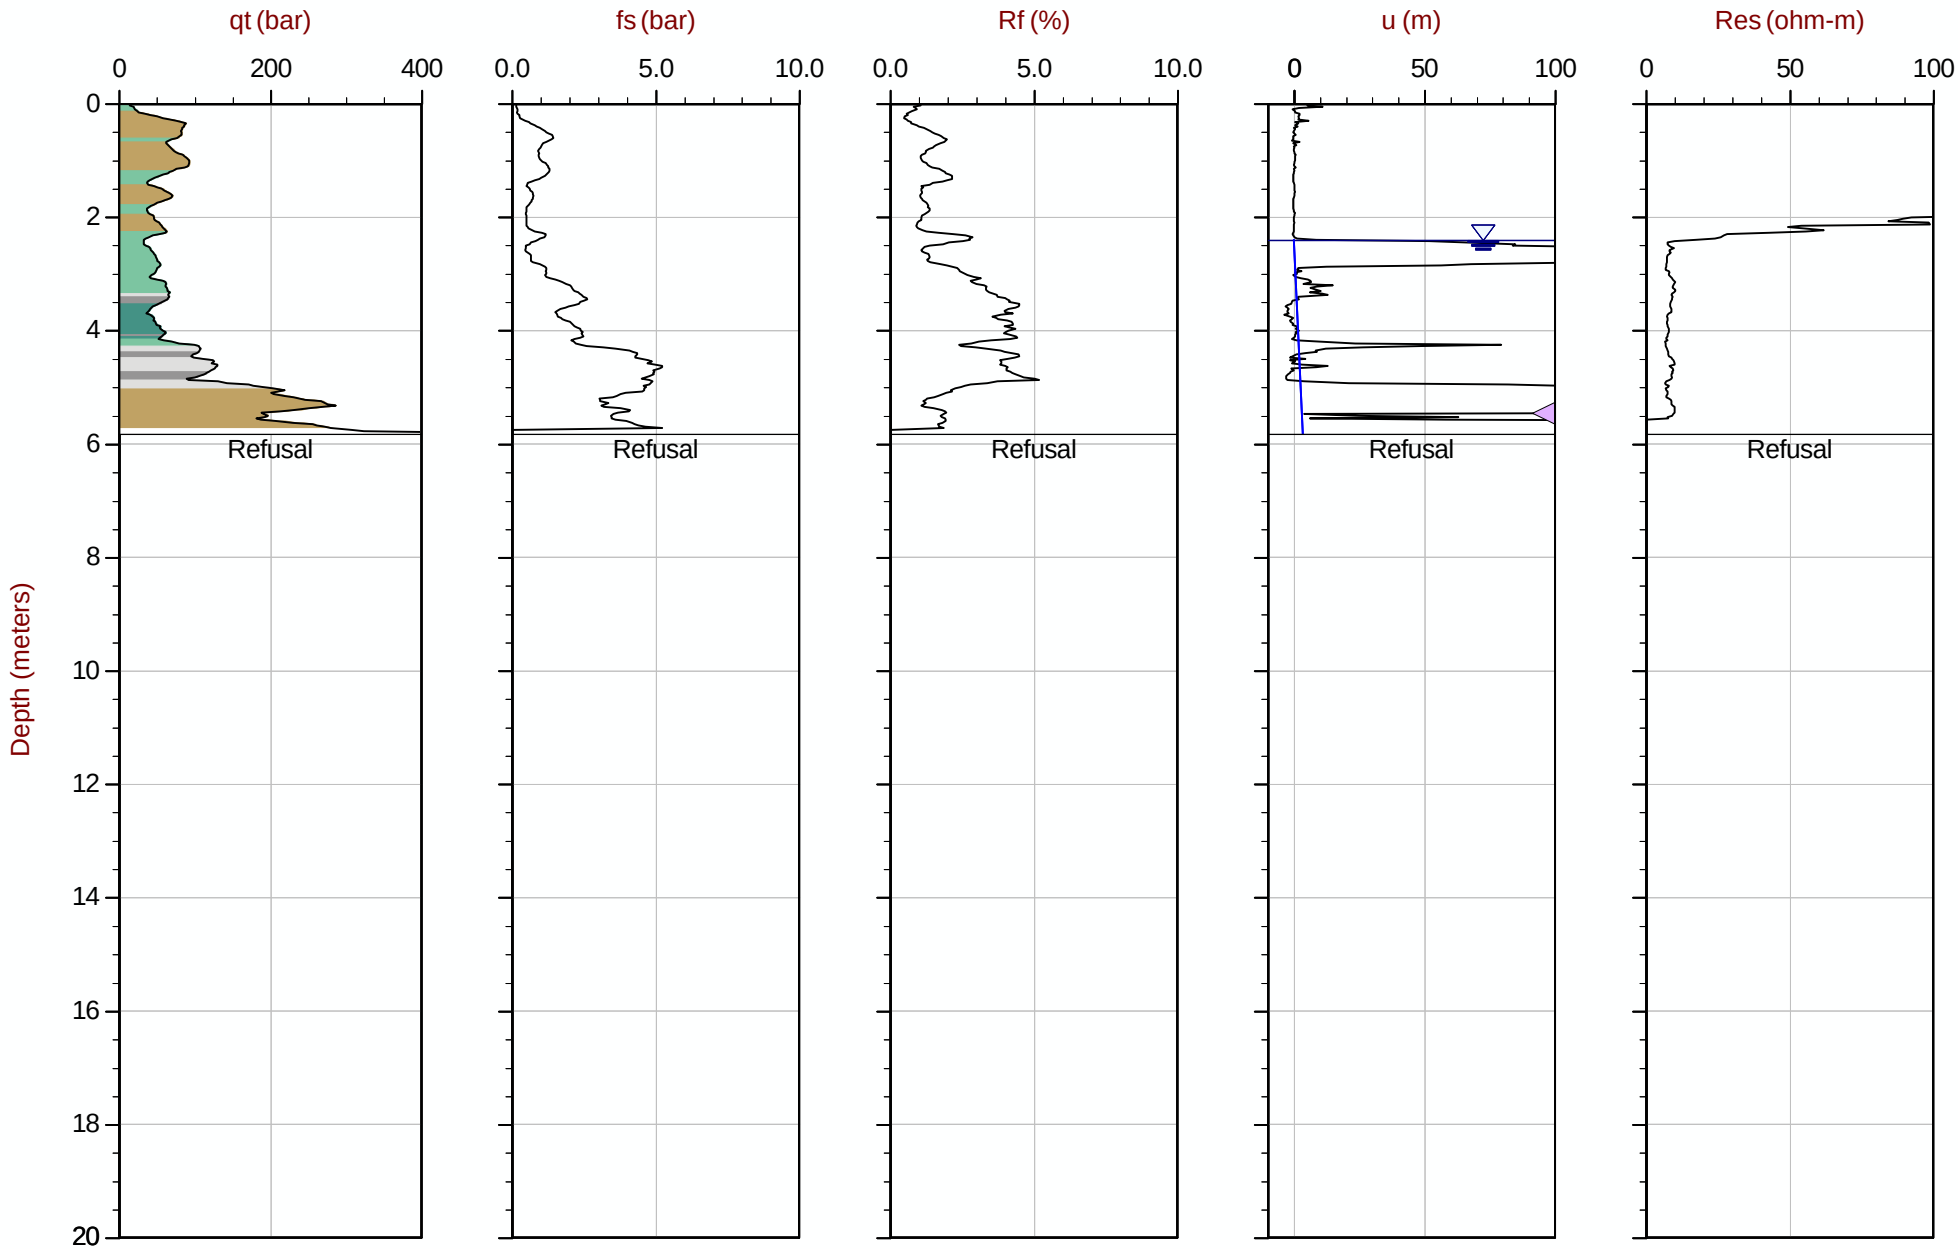

Max Depth: 5.825 m / 19.11 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT277.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610770m E: 416912m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 10:35
Site: Brooks, Alberta

Sounding: RCPT22-22CPT278
Cone: 854:T1500F15U35 Area= 15cm2

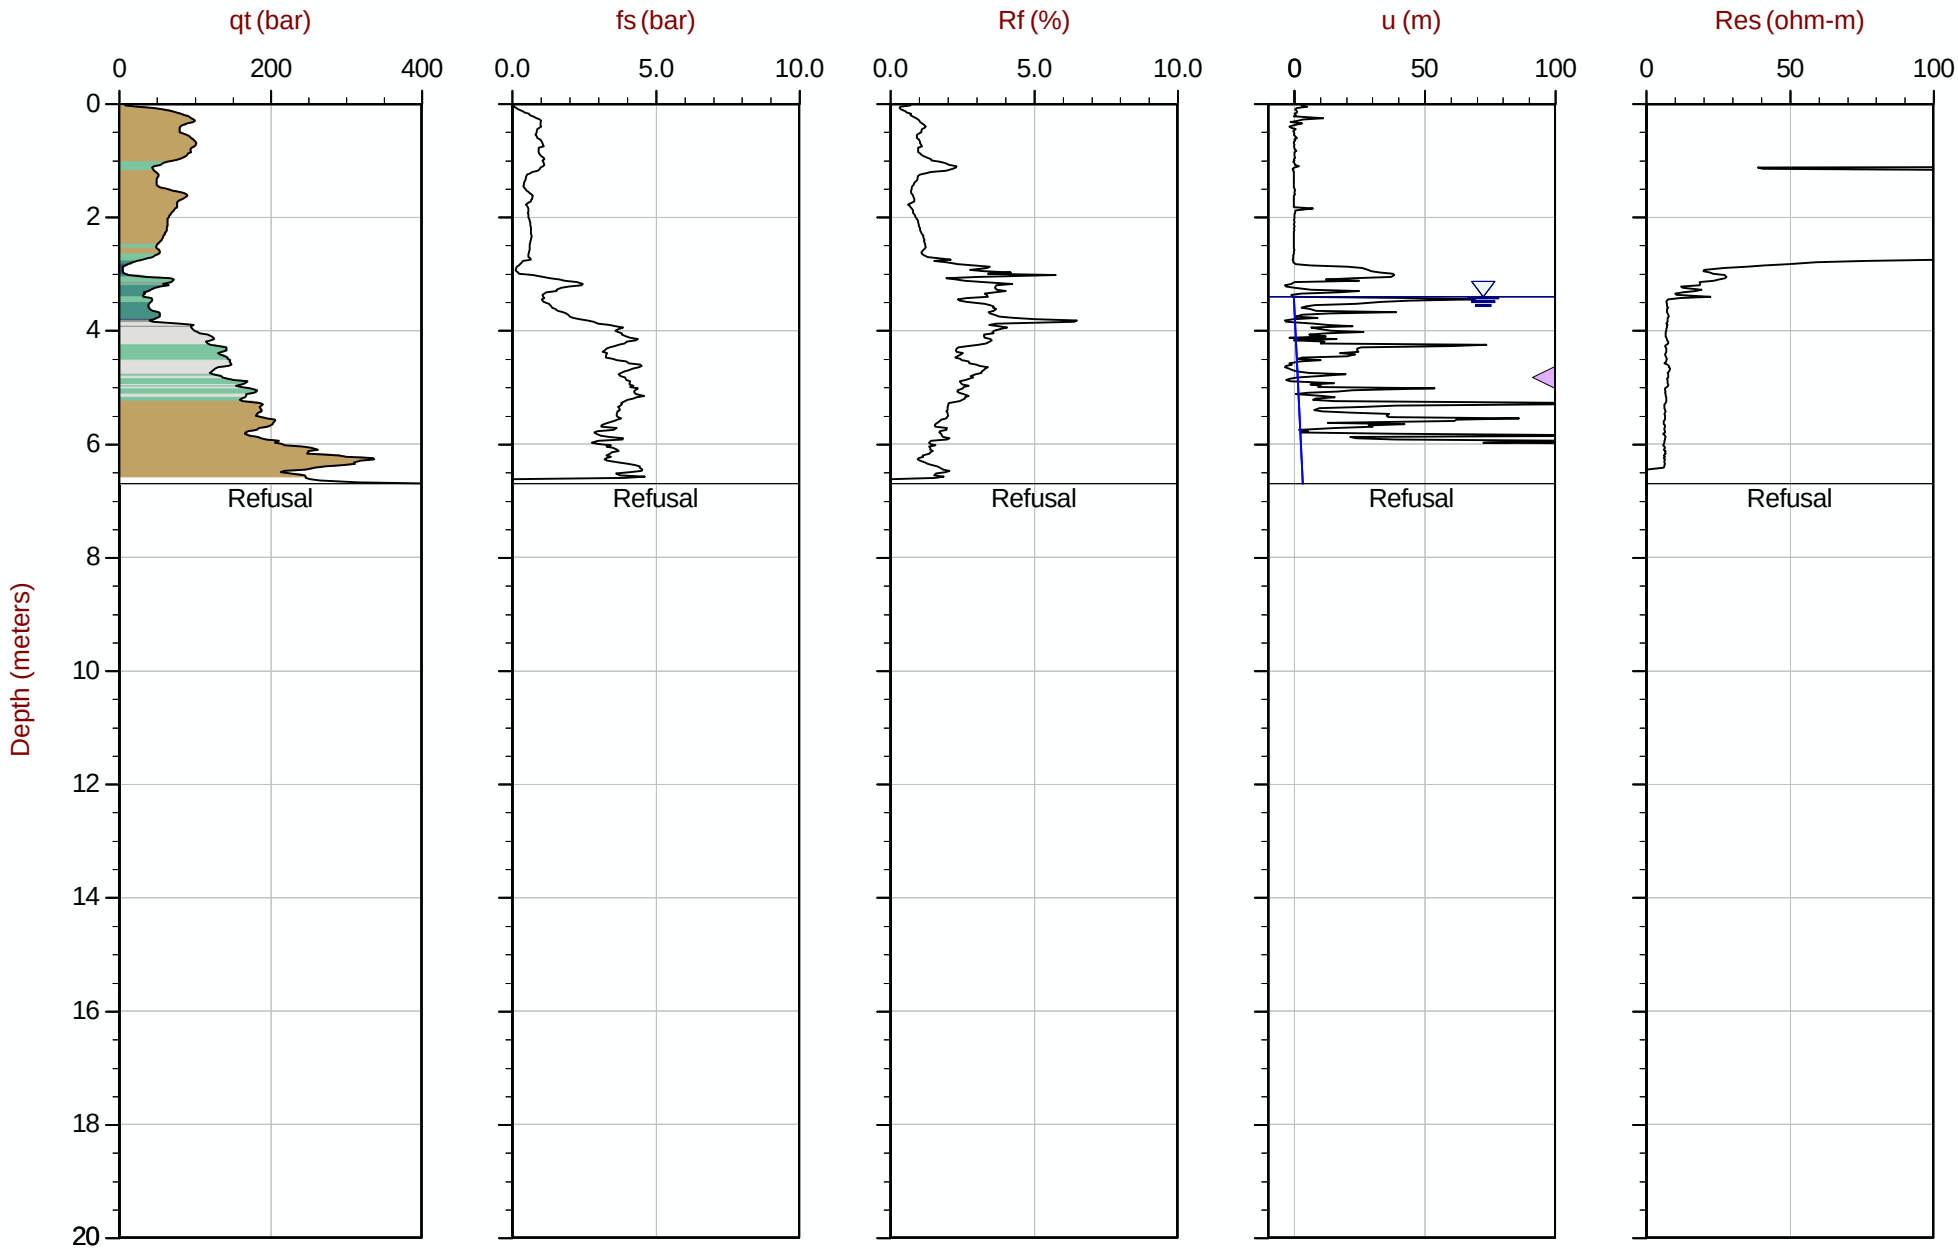

Max Depth: 6.700 m / 21.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT278.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610669m E: 416910m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 11:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT279
Cone: 854:T1500F15U35 Area= 15cm2

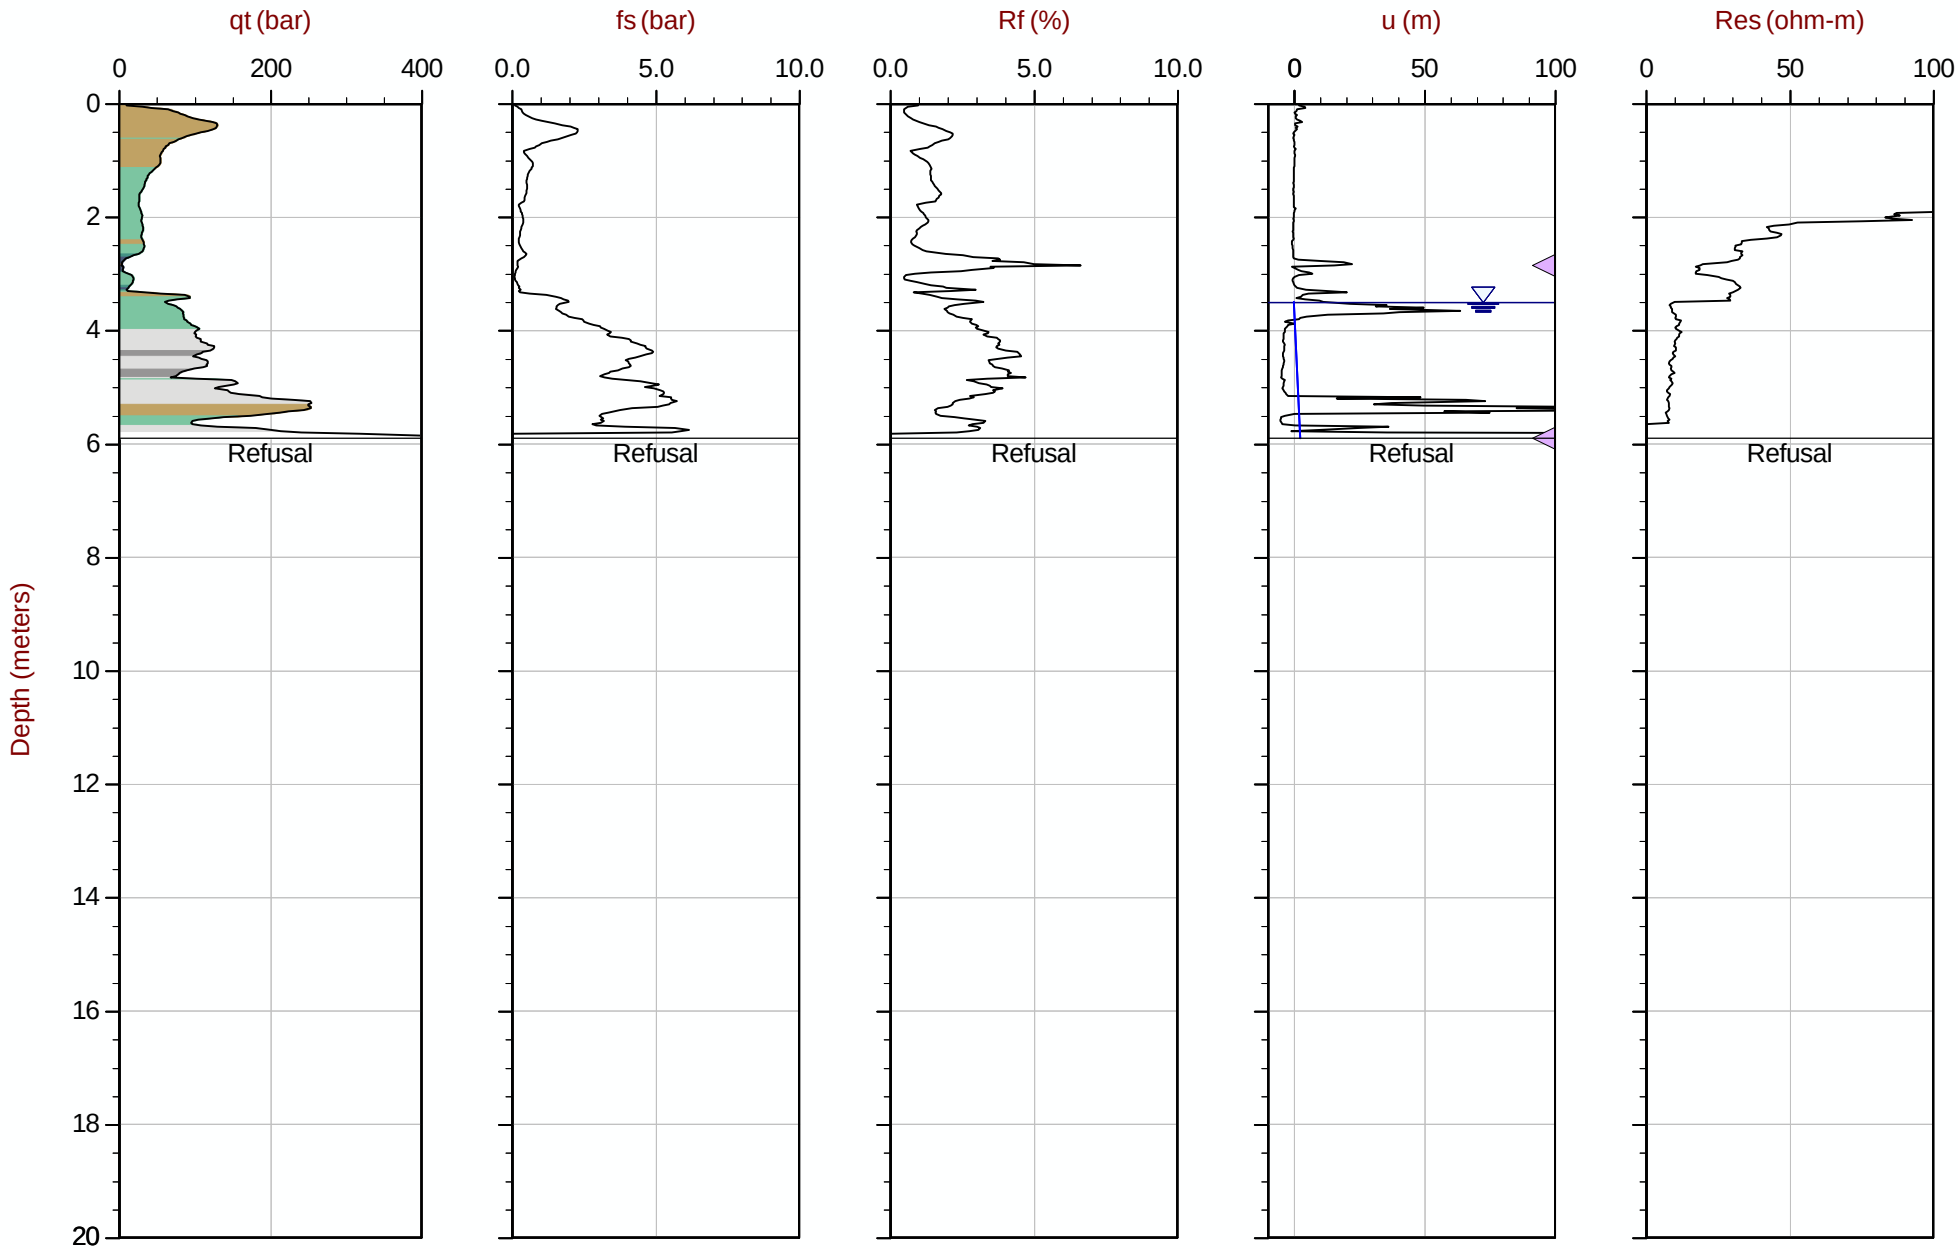

Max Depth: 5.900 m / 19.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT279.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610568m E: 416908m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 12:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT280
Cone: 854:T1500F15U35 Area= 15cm2

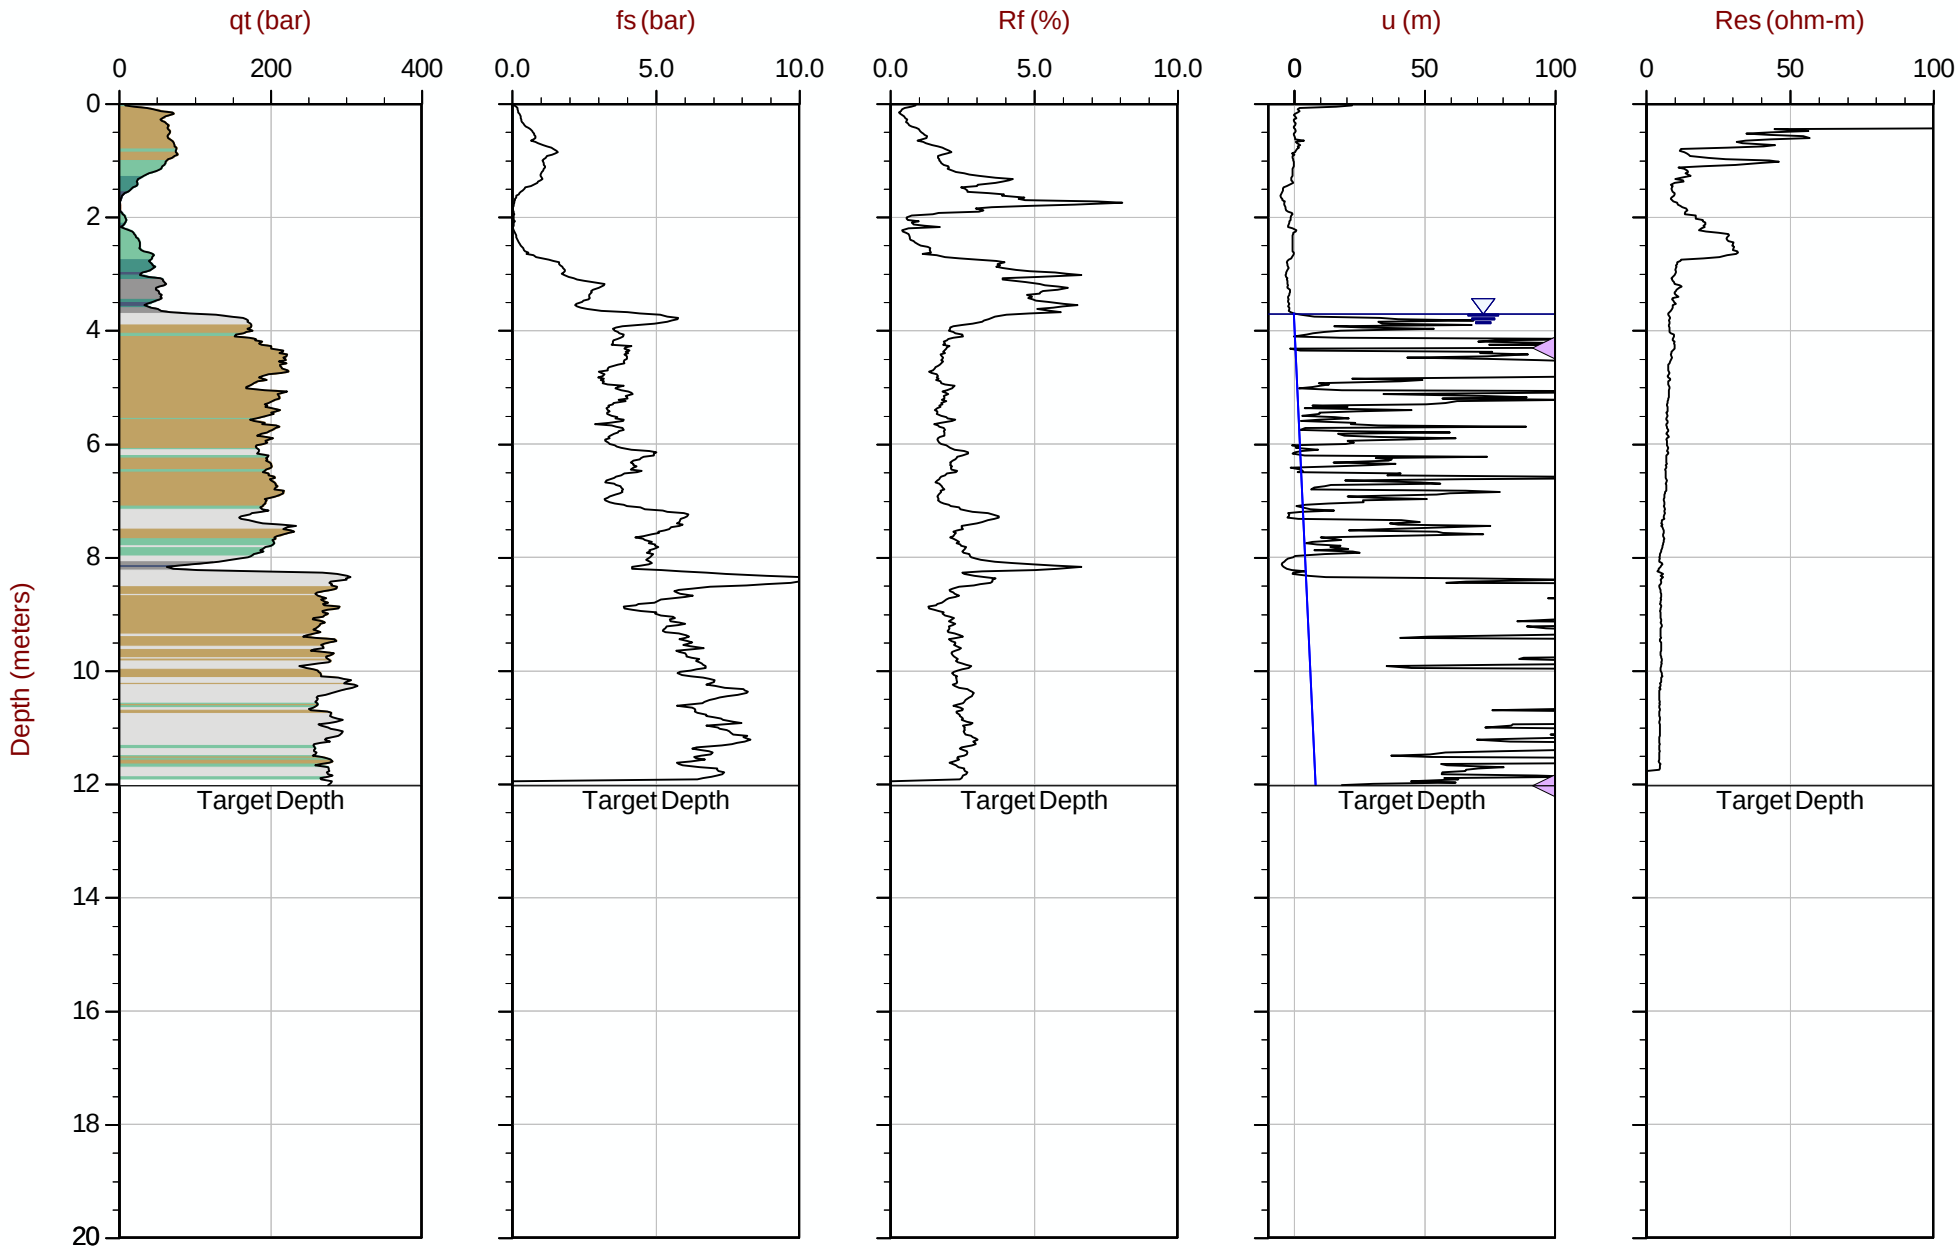

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT280.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610468m E: 416904m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 06:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT281
Cone: 854:T1500F15U35 Area= 15cm2

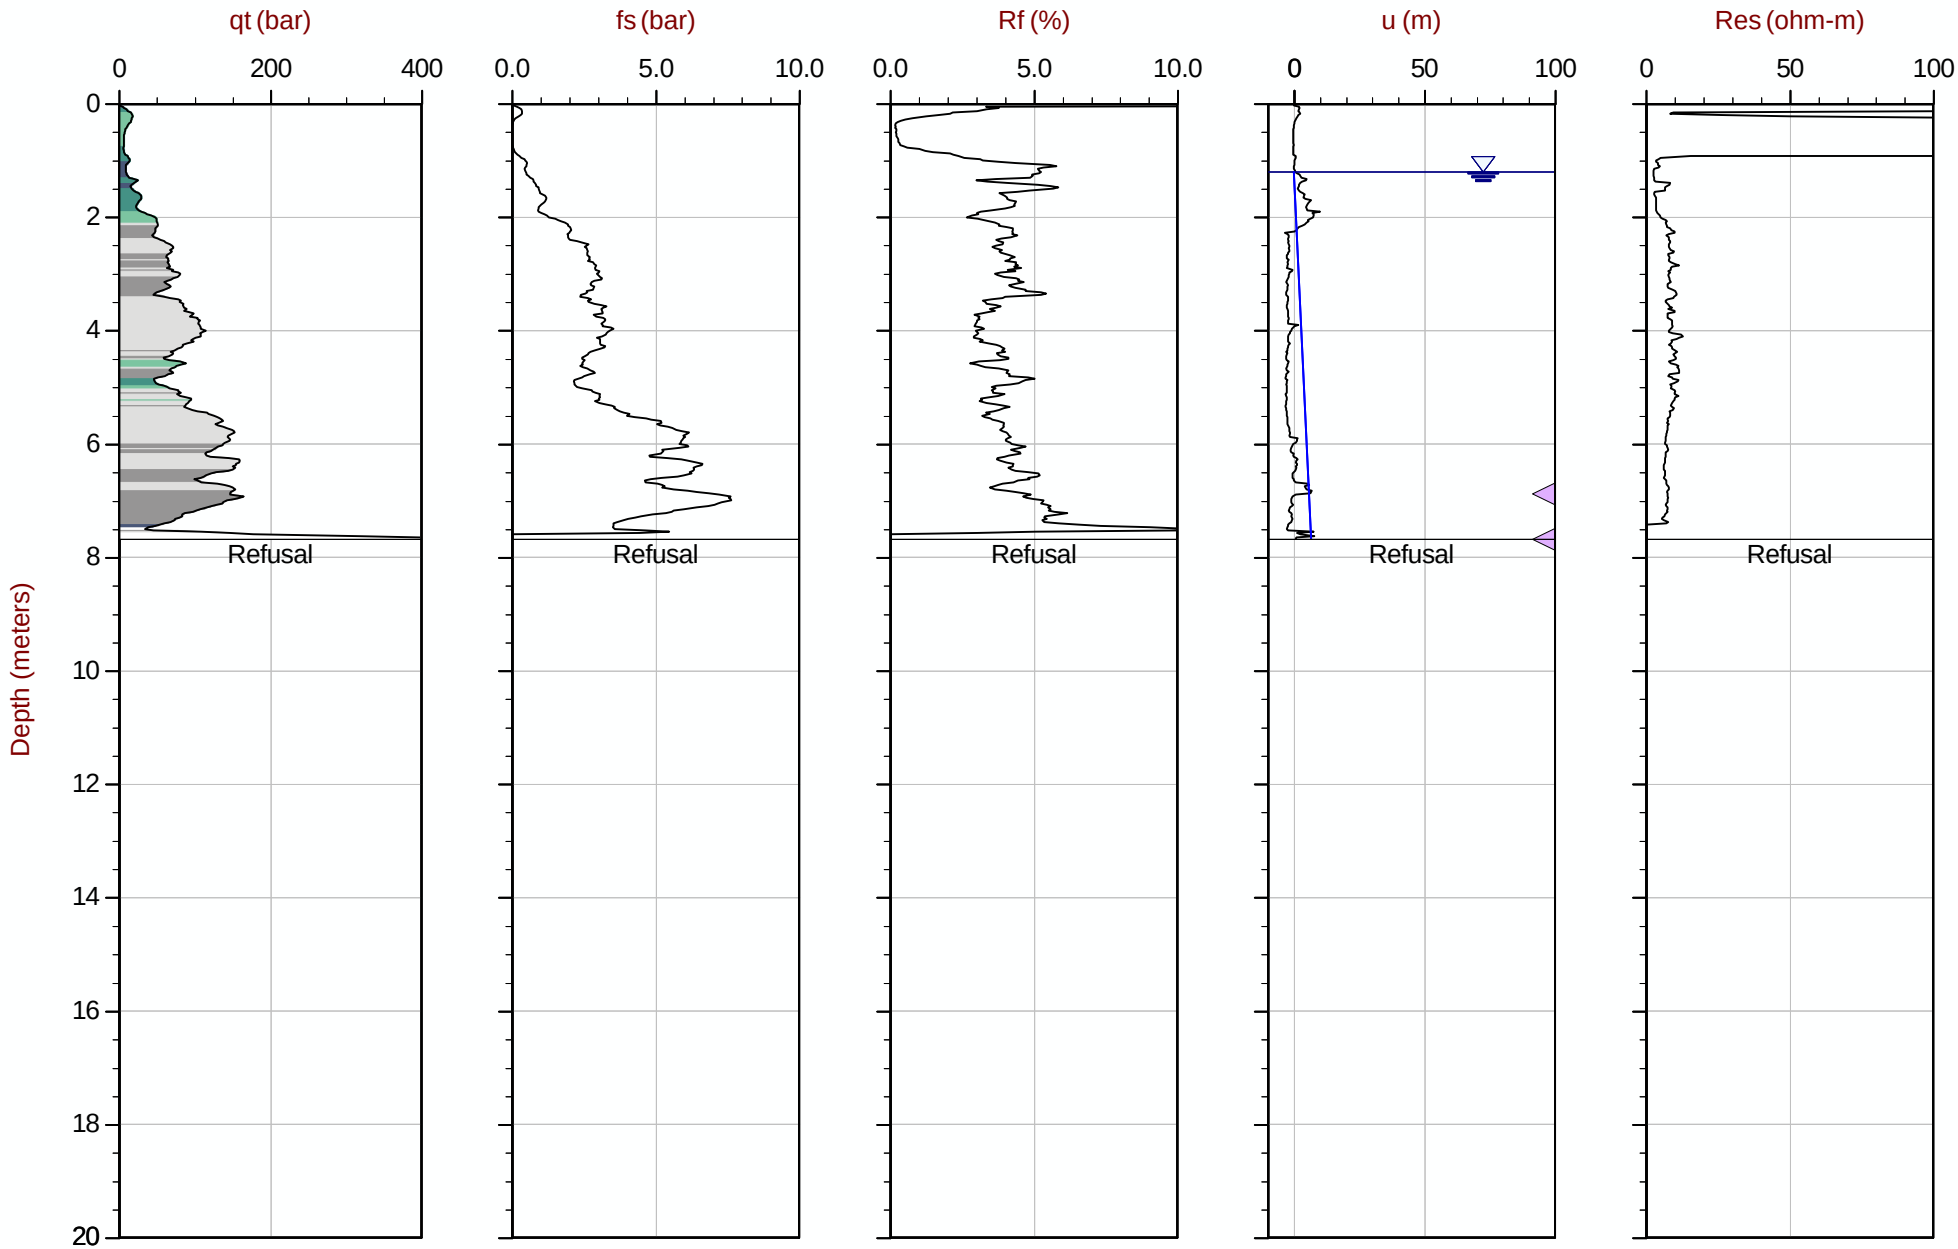

Max Depth: 7.675 m / 25.18 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT281.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610368m E: 416906m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 14:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT282
Cone: 854:T1500F15U35 Area= 15cm2

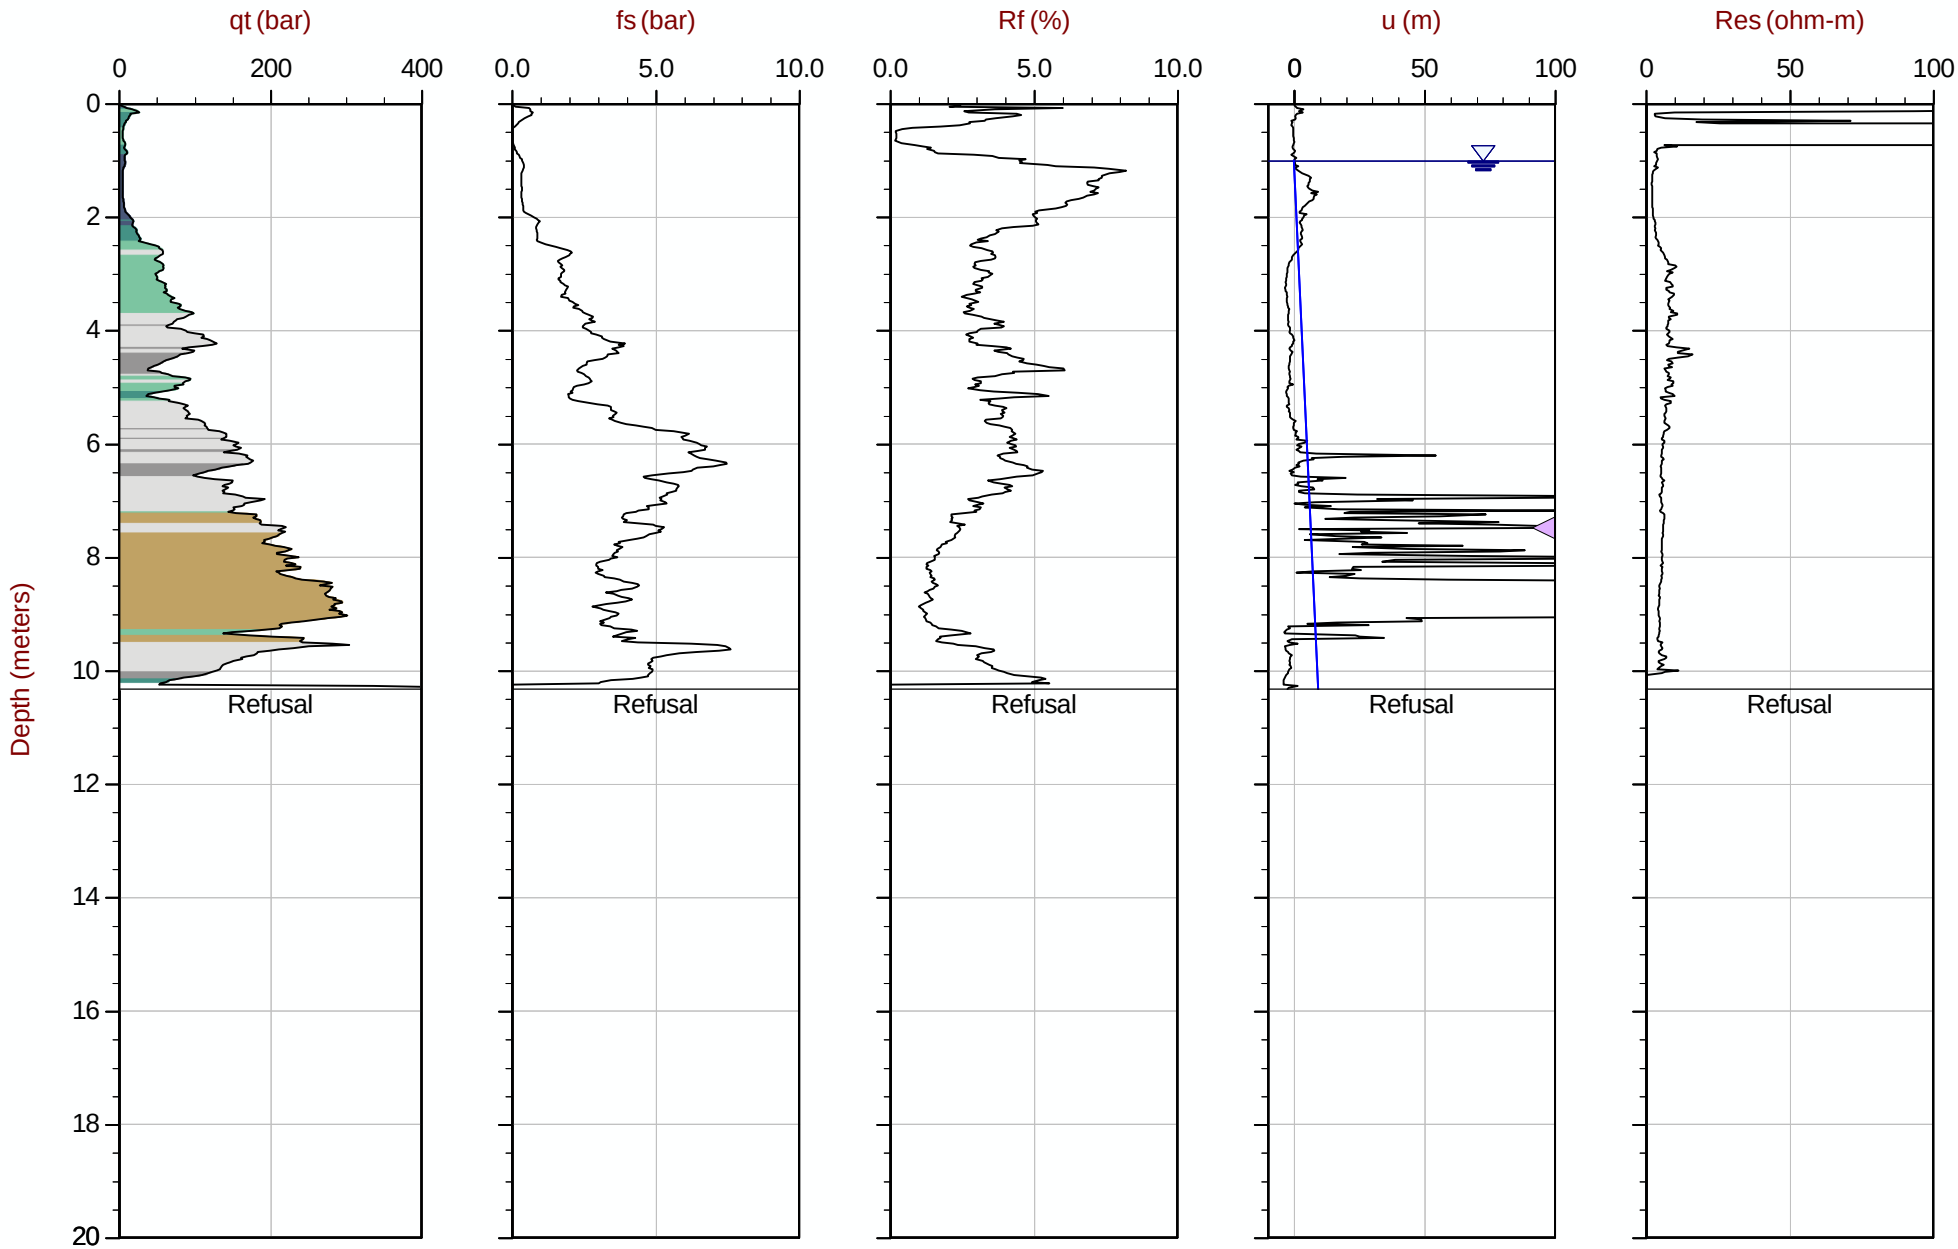

Max Depth: 10.325 m / 33.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT282.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610268m E: 416901m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 15:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT283
Cone: 854:T1500F15U35 Area= 15cm2

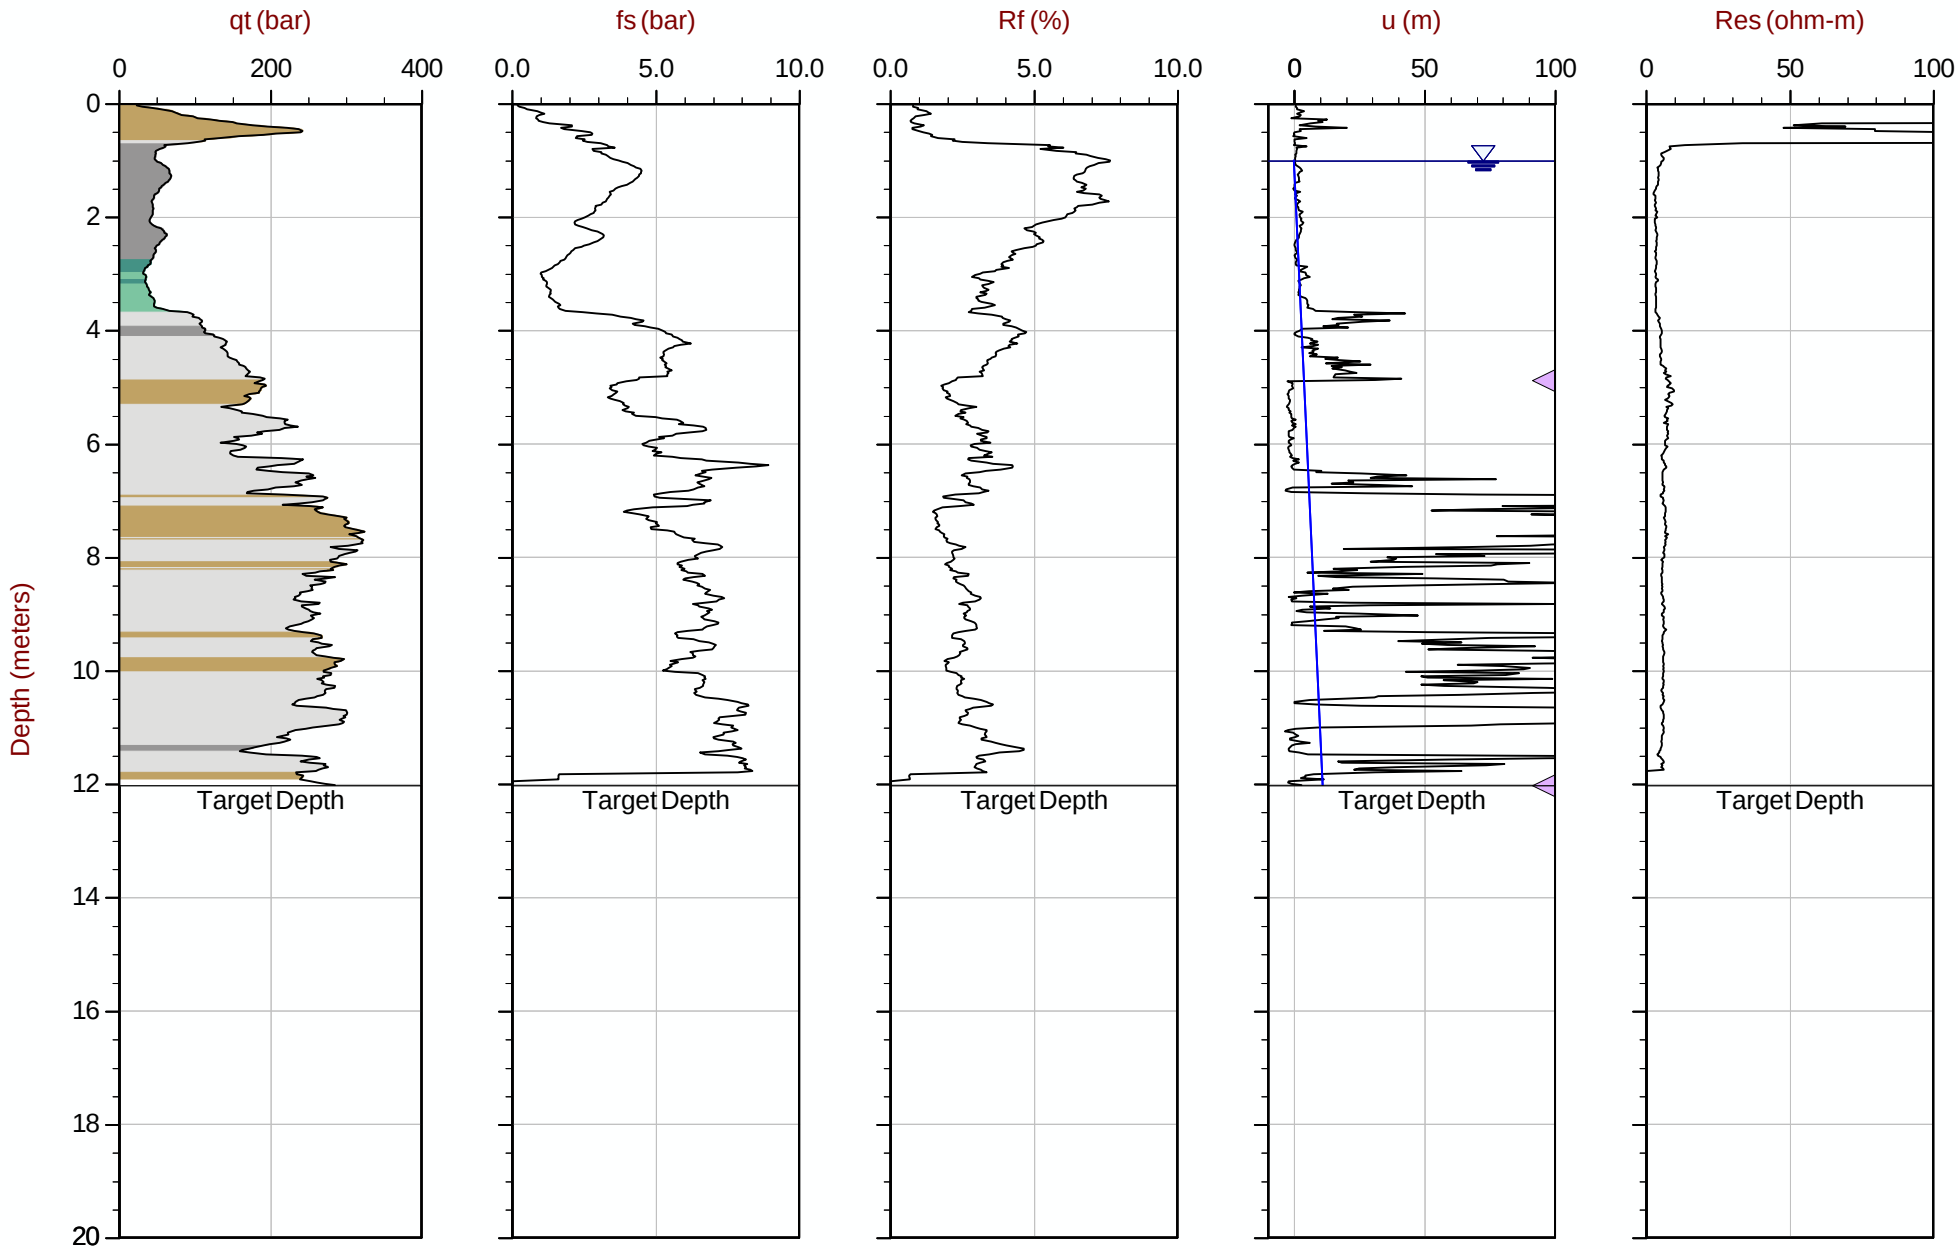

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT283.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610168m E: 416903m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 10:02
Site: Brooks, Alberta

Sounding: RCPT22-22CPT284
Cone: 854:T1500F15U35 Area= 15cm2

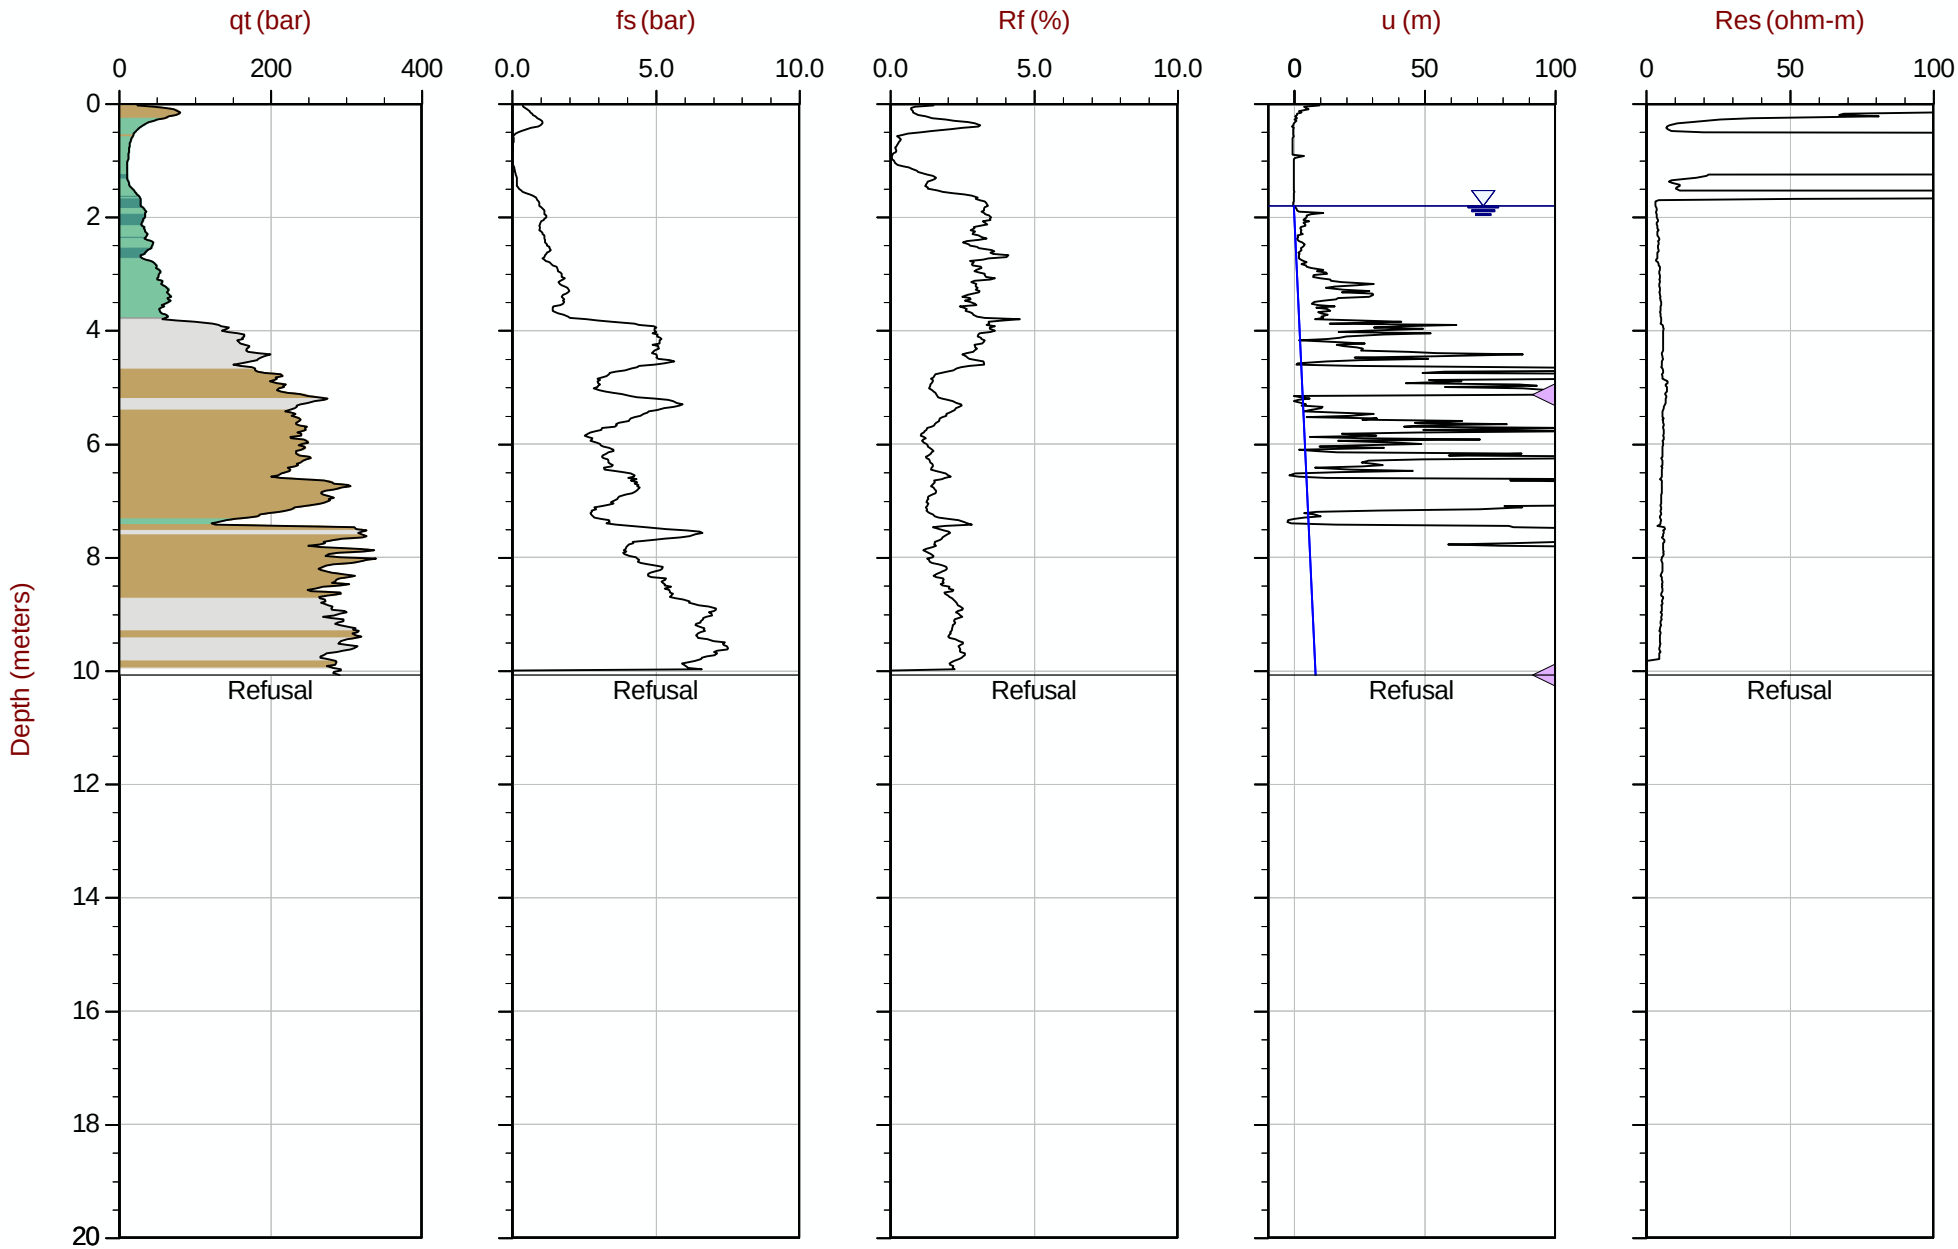

Max Depth: 10.075 m / 33.05 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT284.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610070m E: 416898m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT285
Cone: 854:T1500F15U35 Area= 15cm2

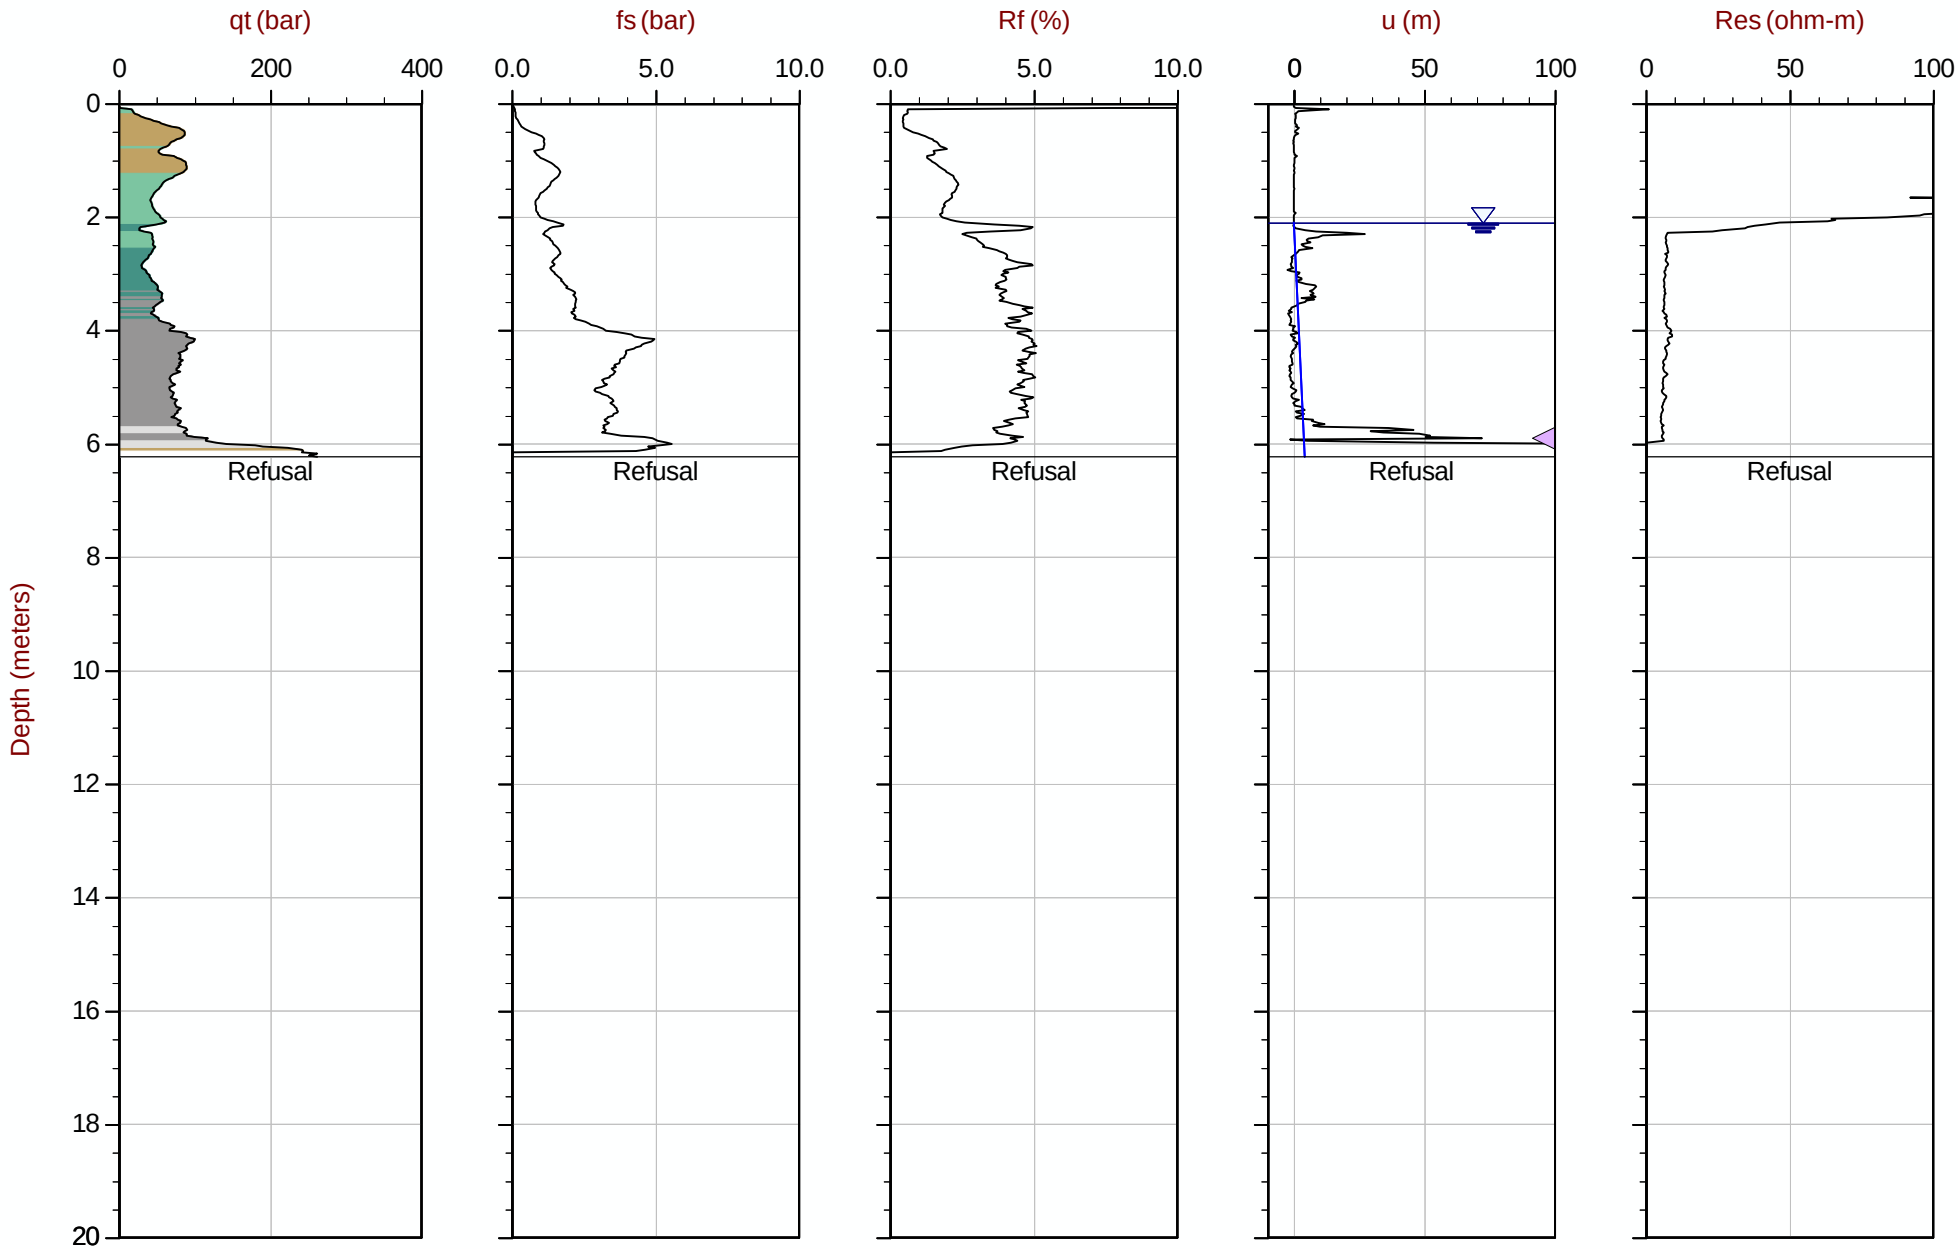

Max Depth: 6.225 m / 20.42 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT285.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609970m E: 416893m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 09:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT286
Cone: 854:T1500F15U35 Area= 15cm2

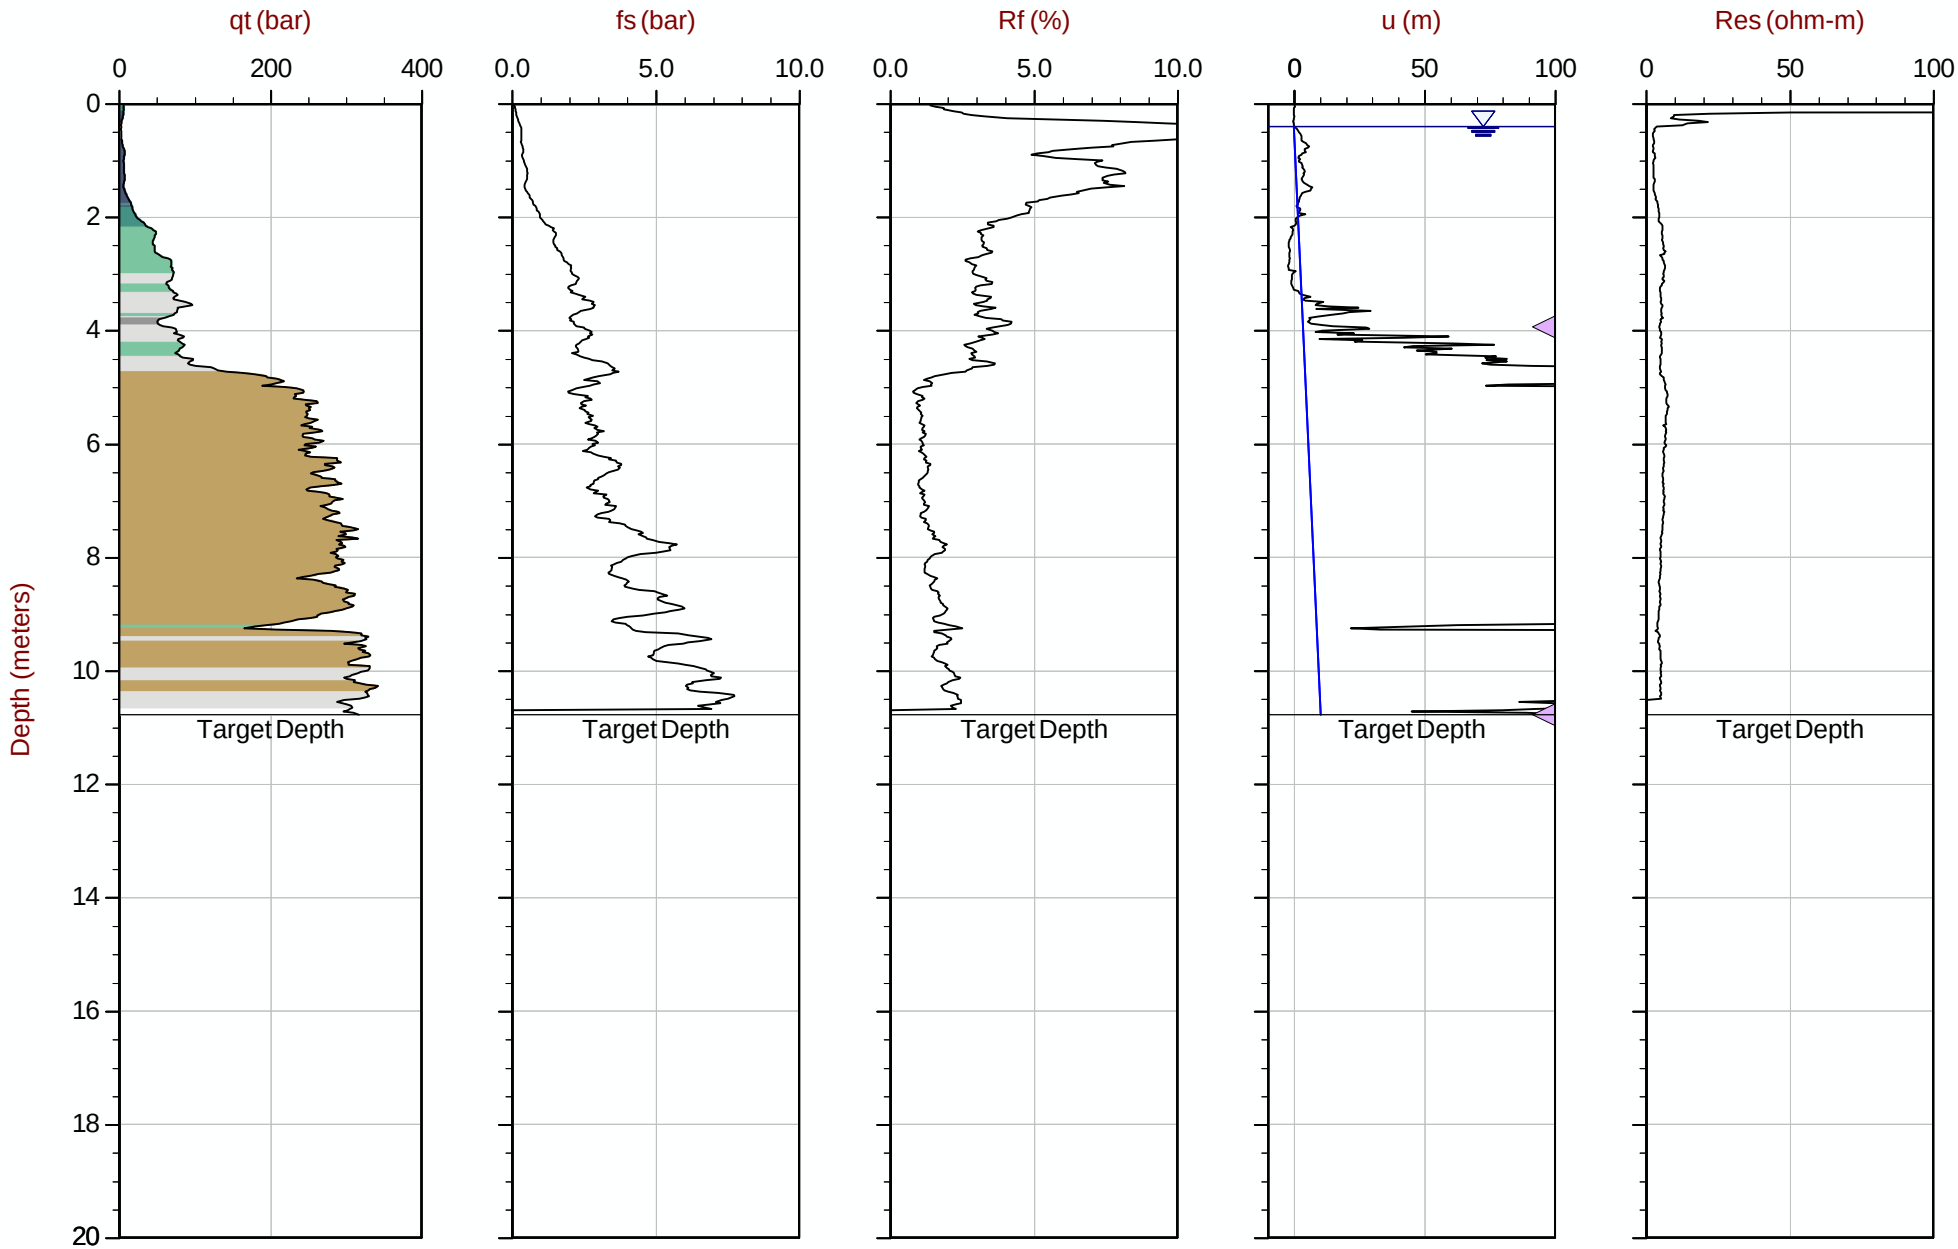

Max Depth: 10.775 m / 35.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT286.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609870m E: 416898m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 12:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT287
Cone: 854:T1500F15U35 Area= 15cm2

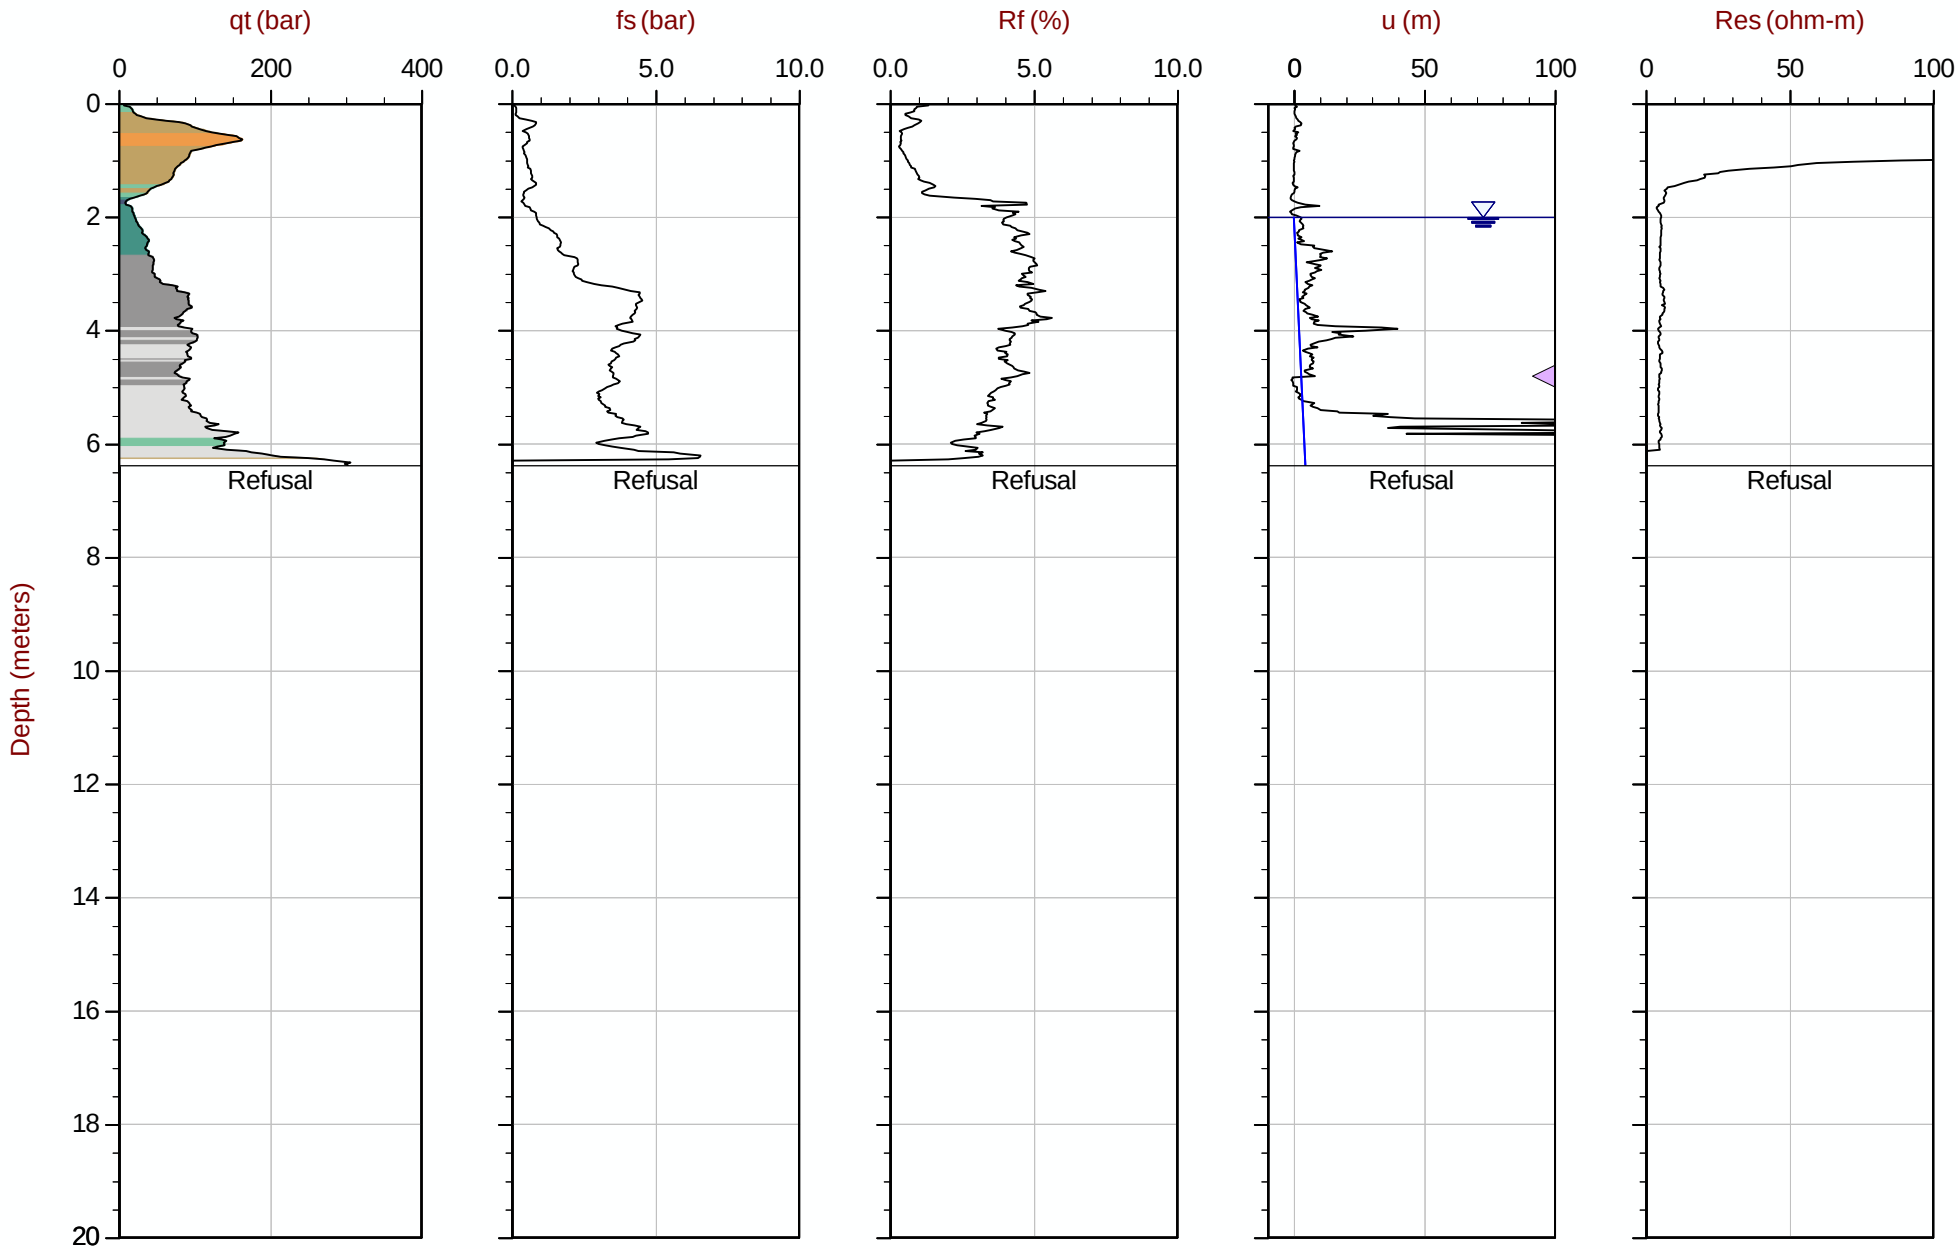

Max Depth: 6.375 m / 20.92 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22_22CPT287.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609769m E: 416895m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 14:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT288
Cone: 854:T1500F15U35 Area= 15cm2

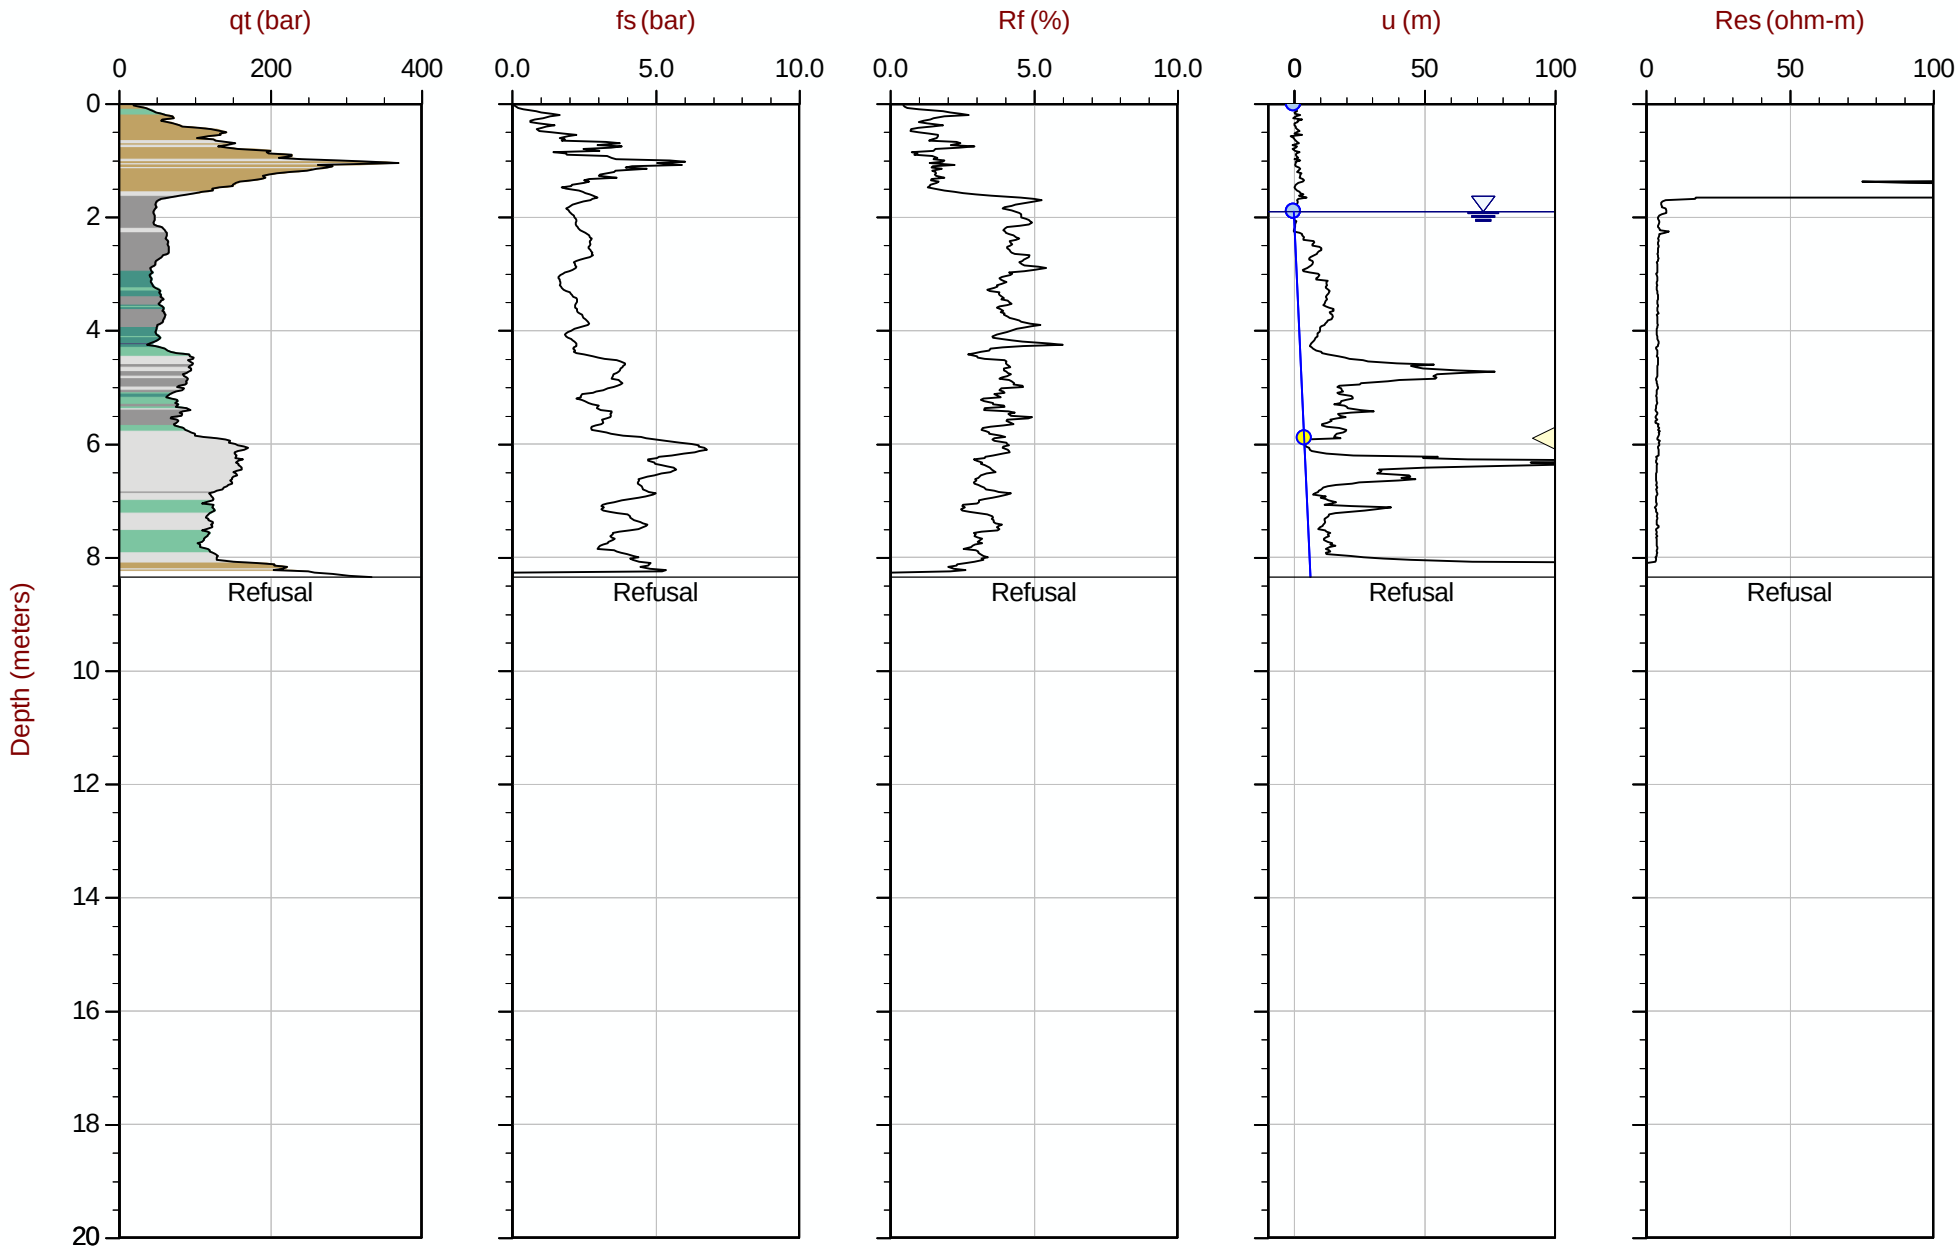

Max Depth: 8.350 m / 27.39 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT288.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609655m E: 416872m Elev: 768.551m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 08:18
Site: Brooks, Alberta

Sounding: RCPT22-22CPT300
Cone: 854:T1500F15U35 Area= 15cm2

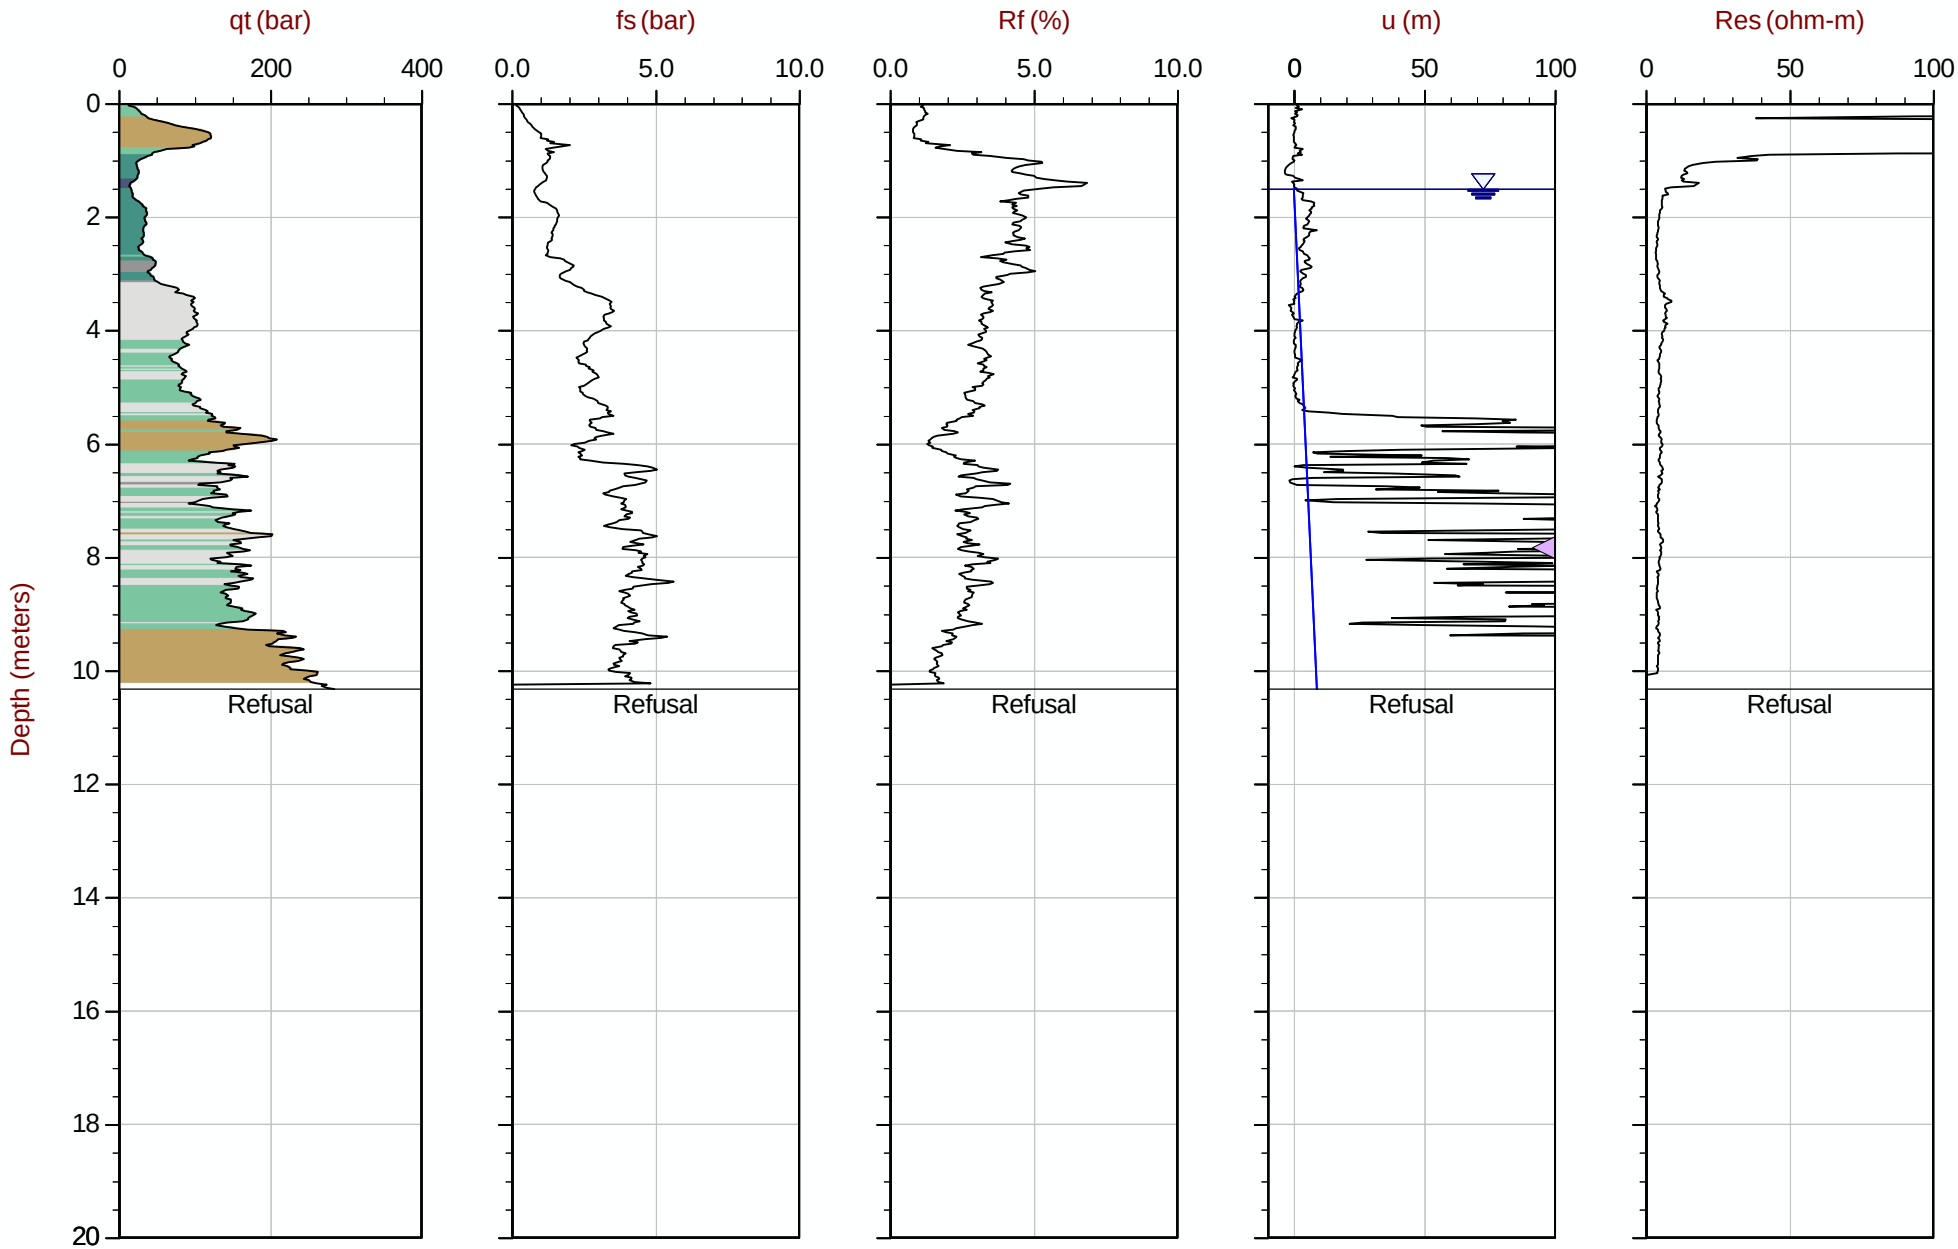

Max Depth: 10.325 m / 33.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT300.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609541m E: 416733m Elev: 768.186m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 10:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT301
Cone: 854:T1500F15U35 Area= 15cm2

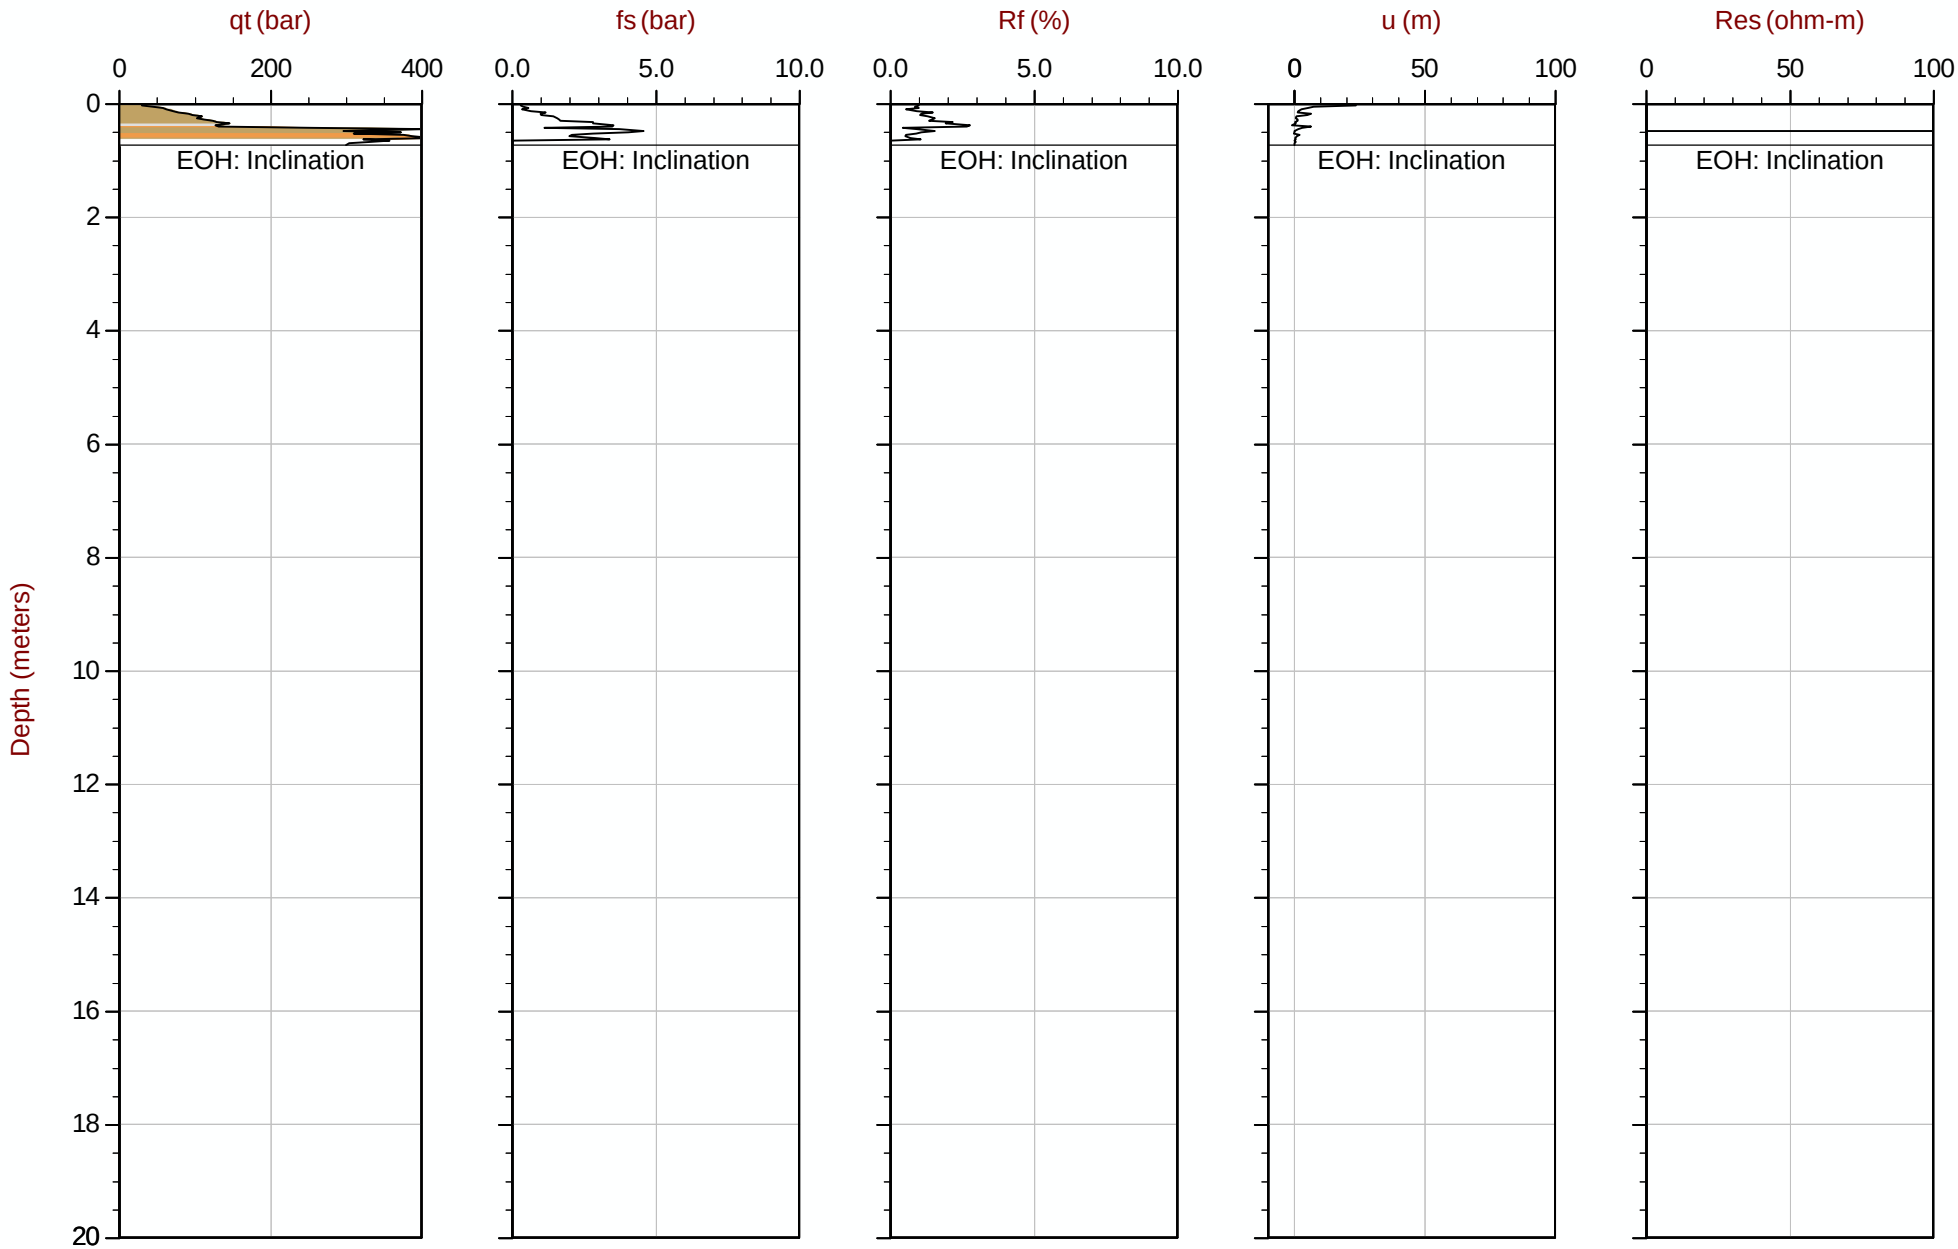

Max Depth: 0.725 m / 2.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT301.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609514m E: 416692m Elev: 769.445m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 10:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT301B
Cone: 854:T1500F15U35 Area= 15cm2

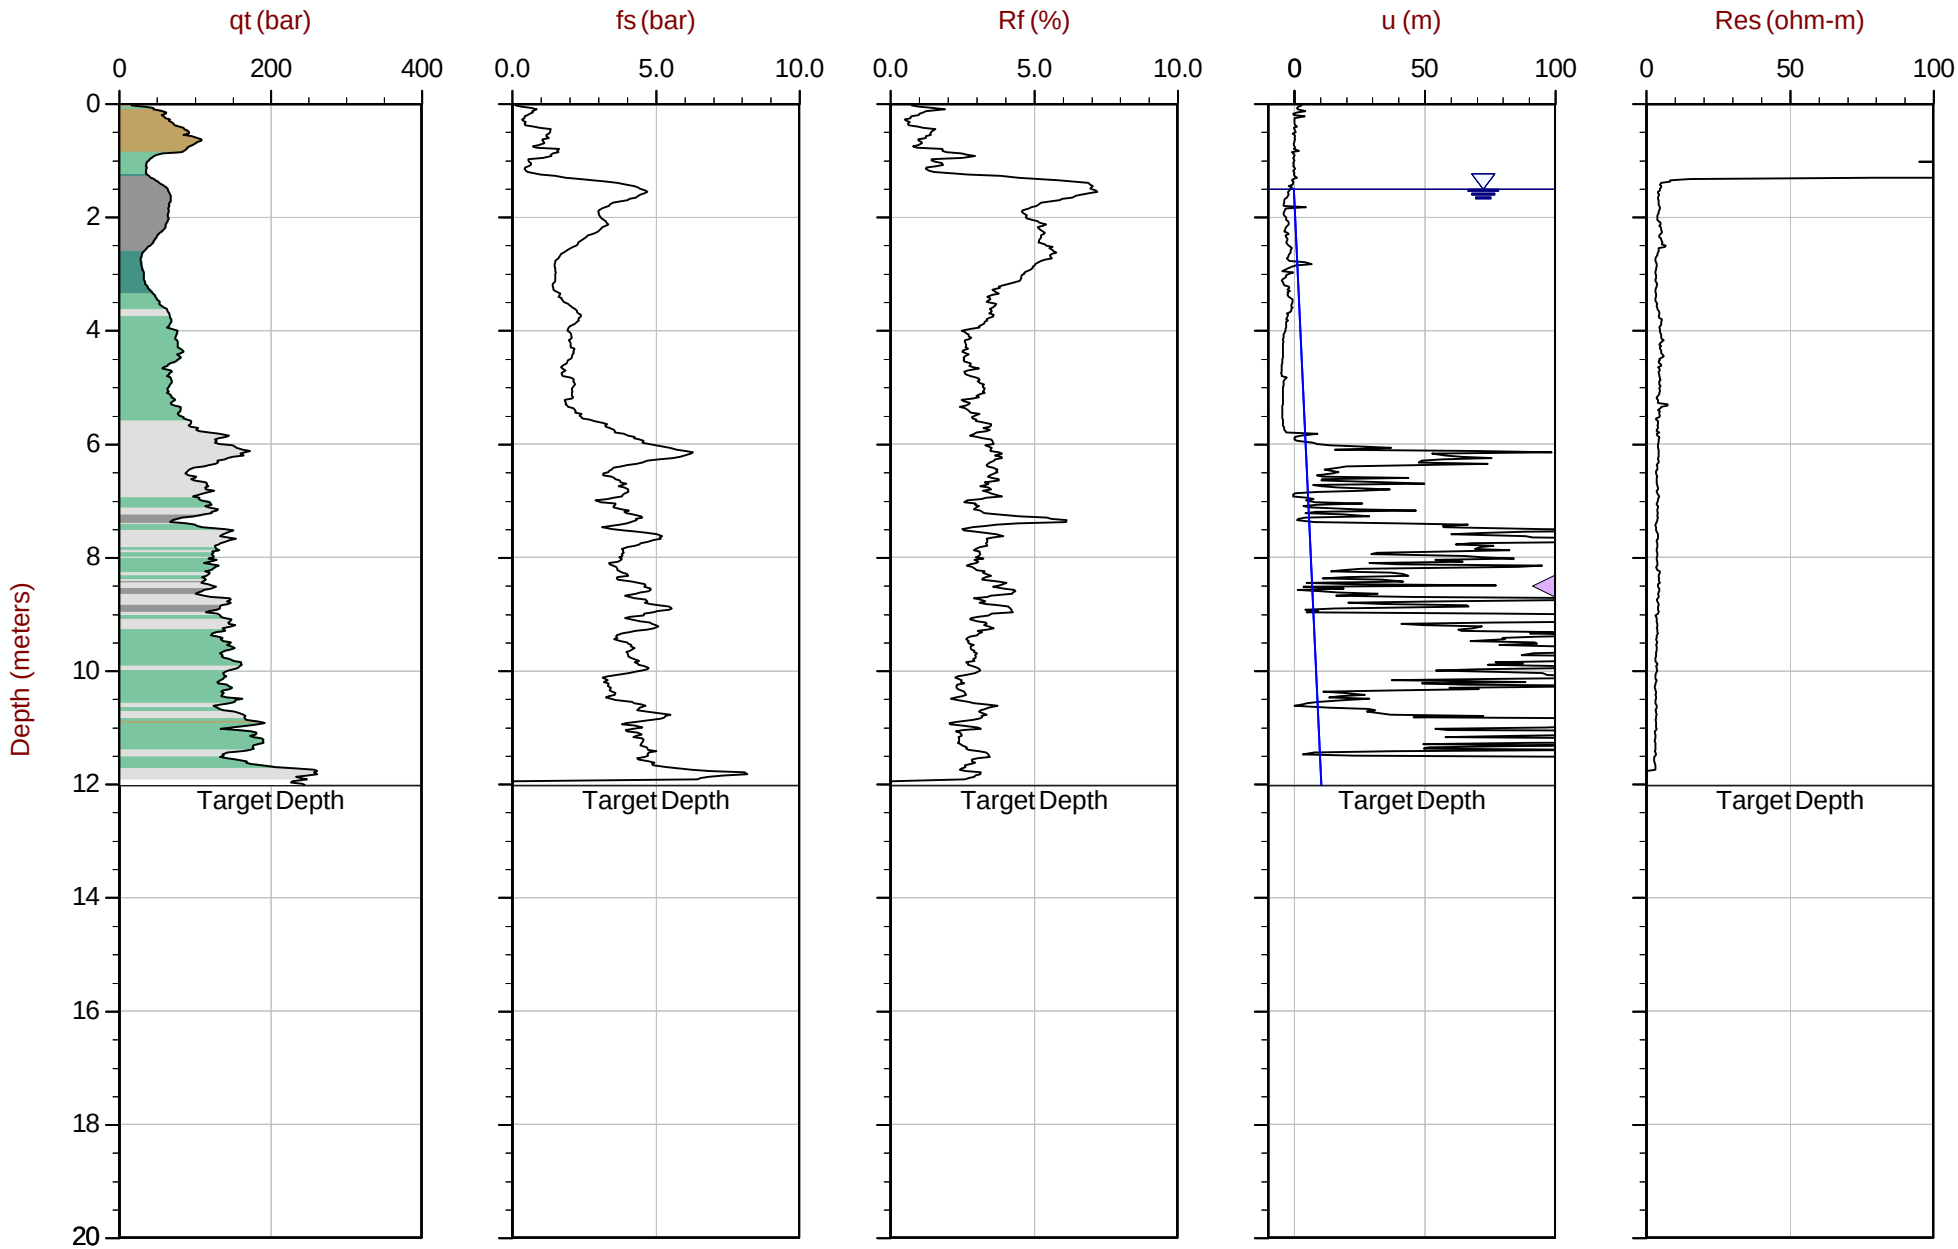

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT301B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609511m E: 416692m Elev: 769.400m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 11:25
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT302
Cone: 854:T1500F15U35 Area= 15cm2

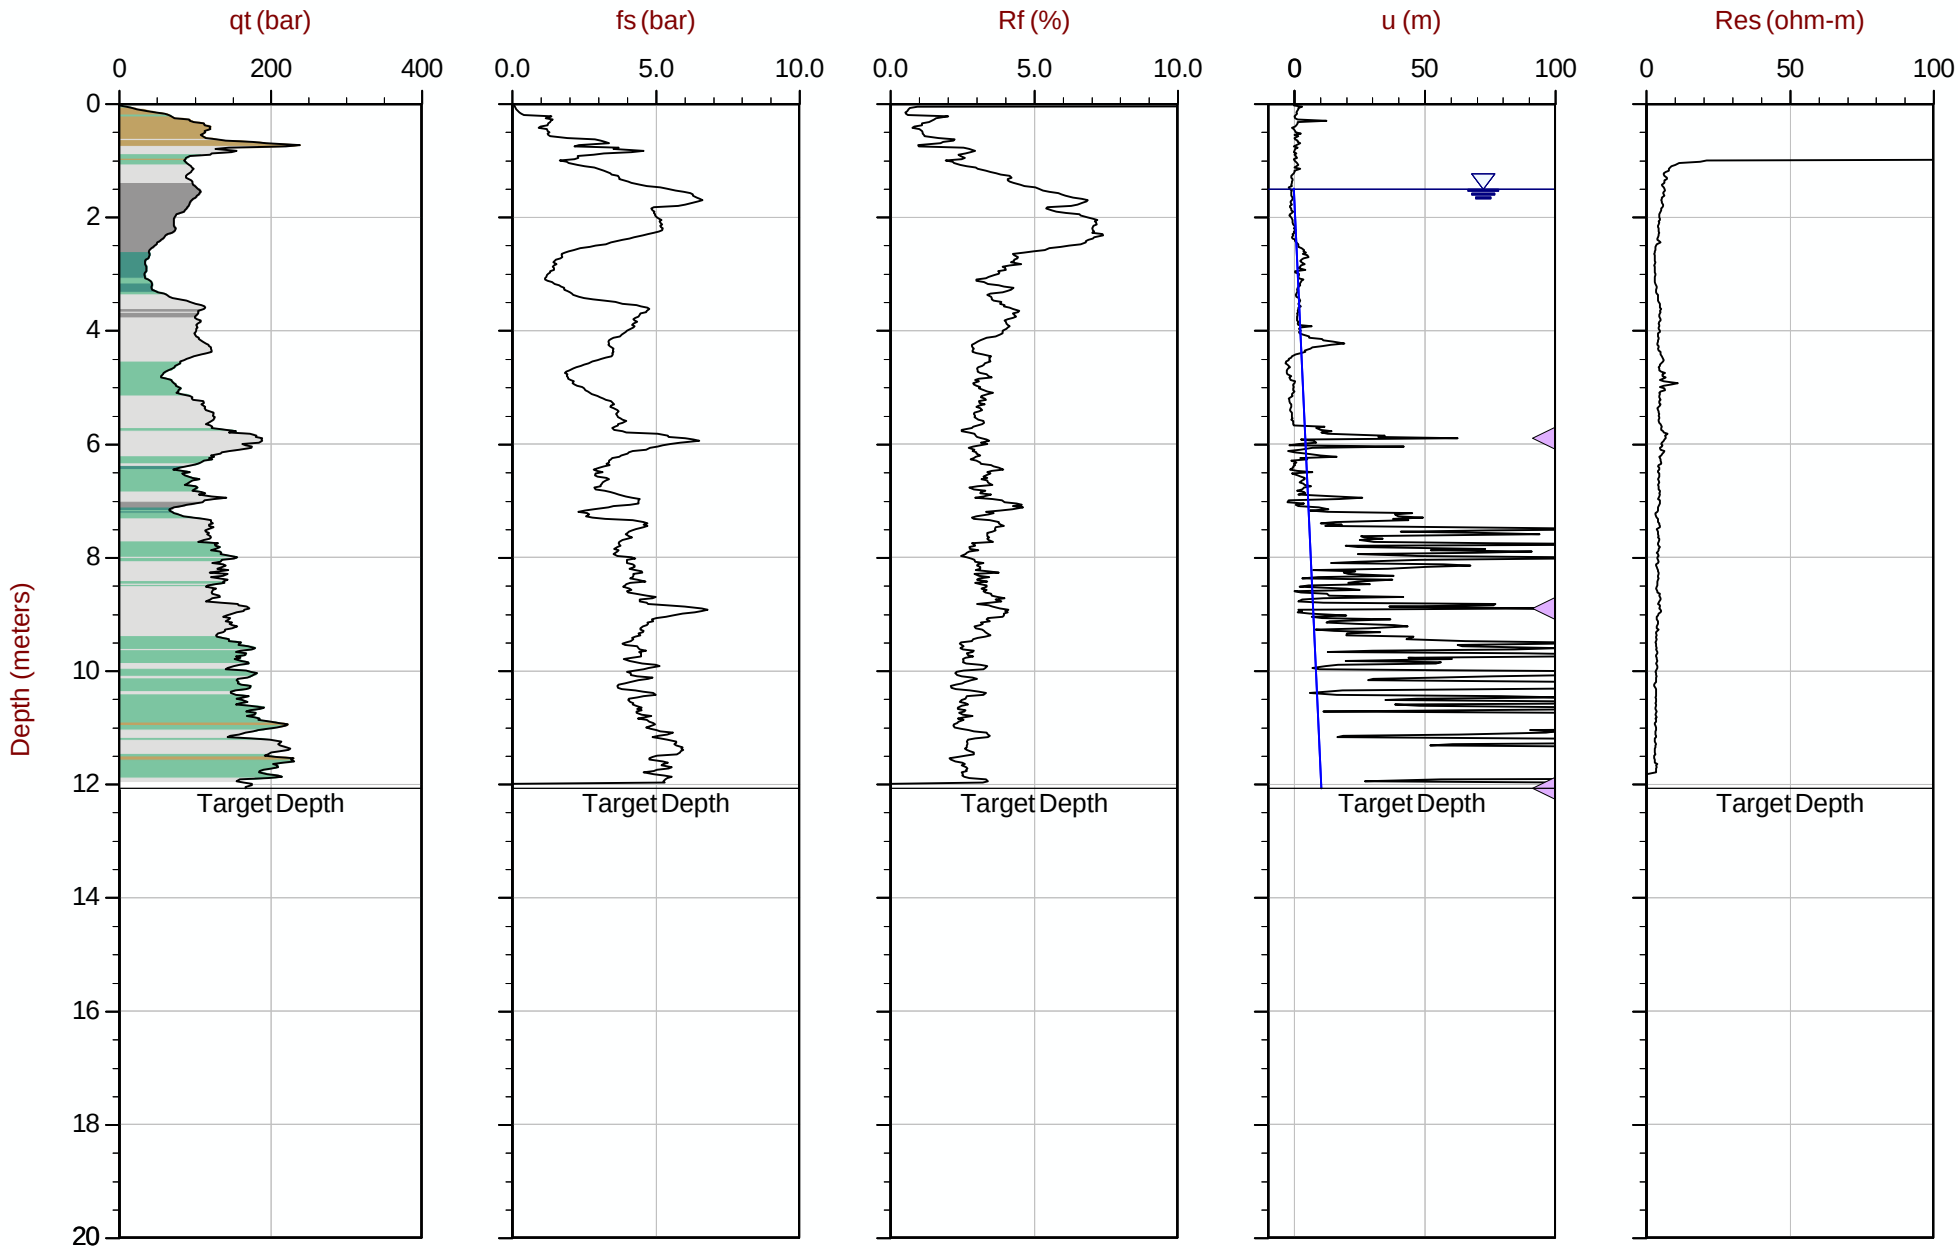

Max Depth: 12.075 m / 39.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT302.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609492m E: 416646m Elev: 769.017m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT303
Cone: 854:T1500F15U35 Area= 15cm2

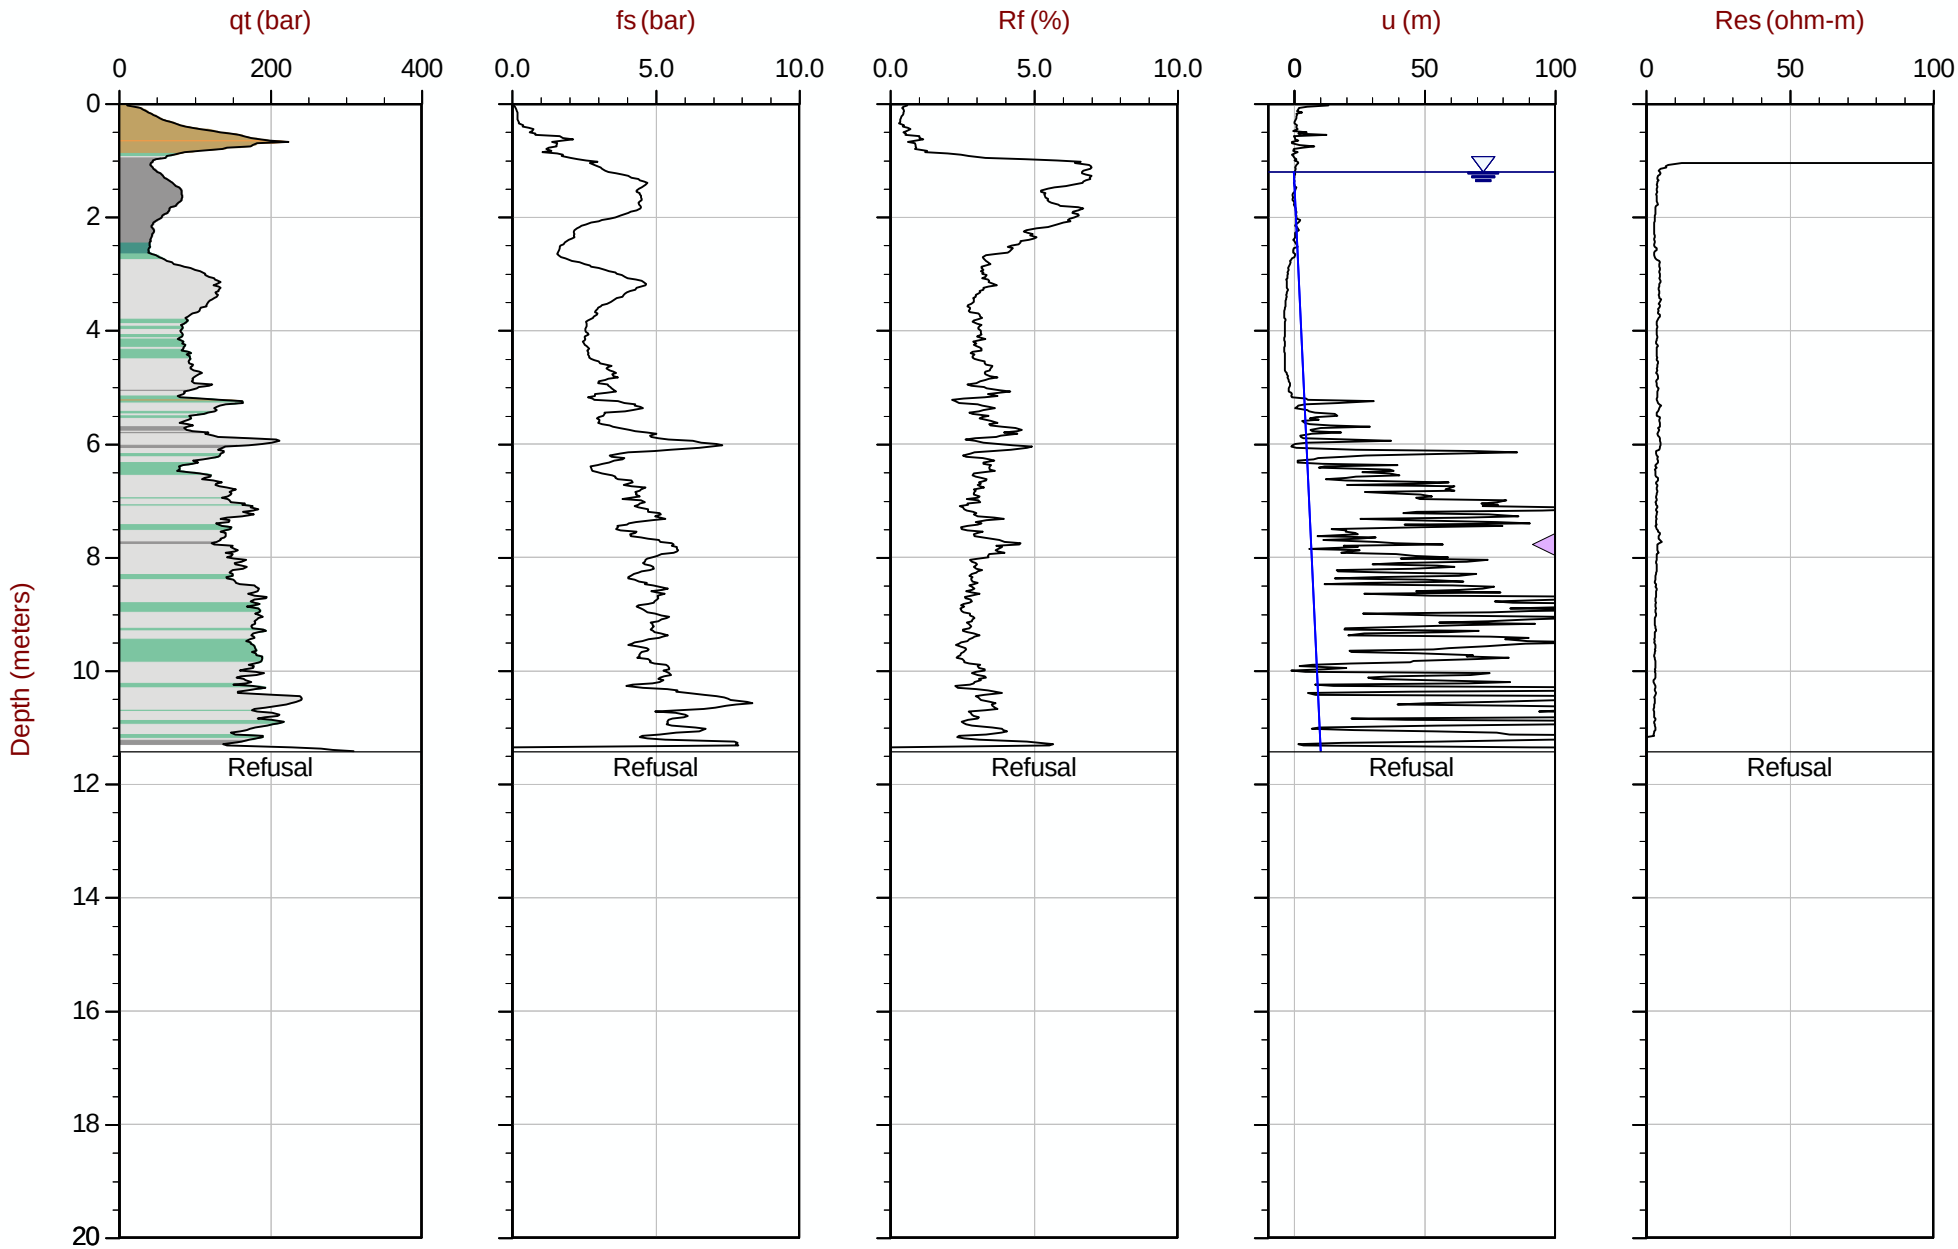

Max Depth: 11.425 m / 37.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT303.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609479m E: 416597m Elev: 768.788m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 14:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT304
Cone: 854:T1500F15U35 Area= 15cm2

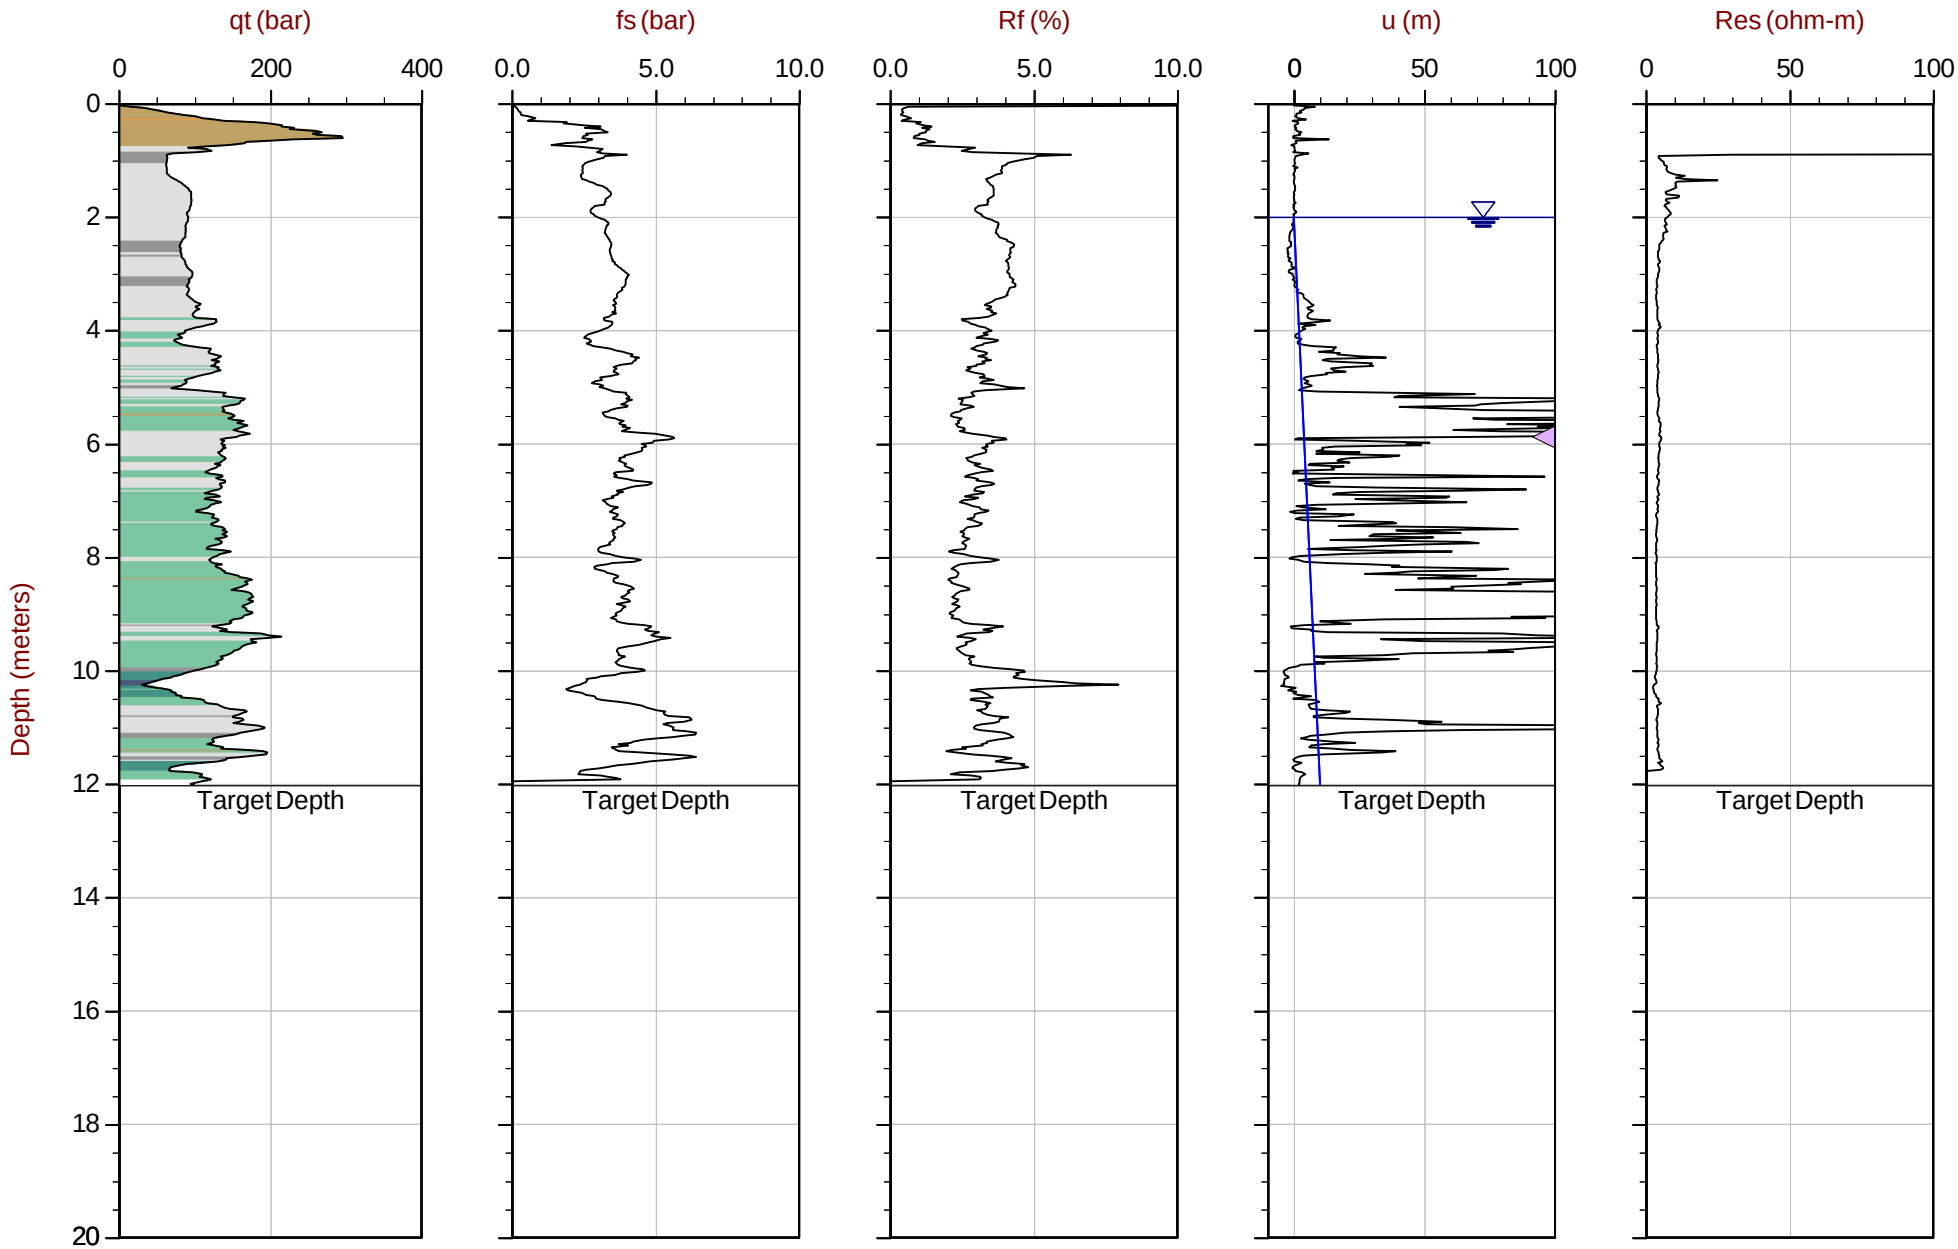

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT304.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416542m Elev: 770.051m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 16:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT305
Cone: 854:T1500F15U35 Area= 15cm2

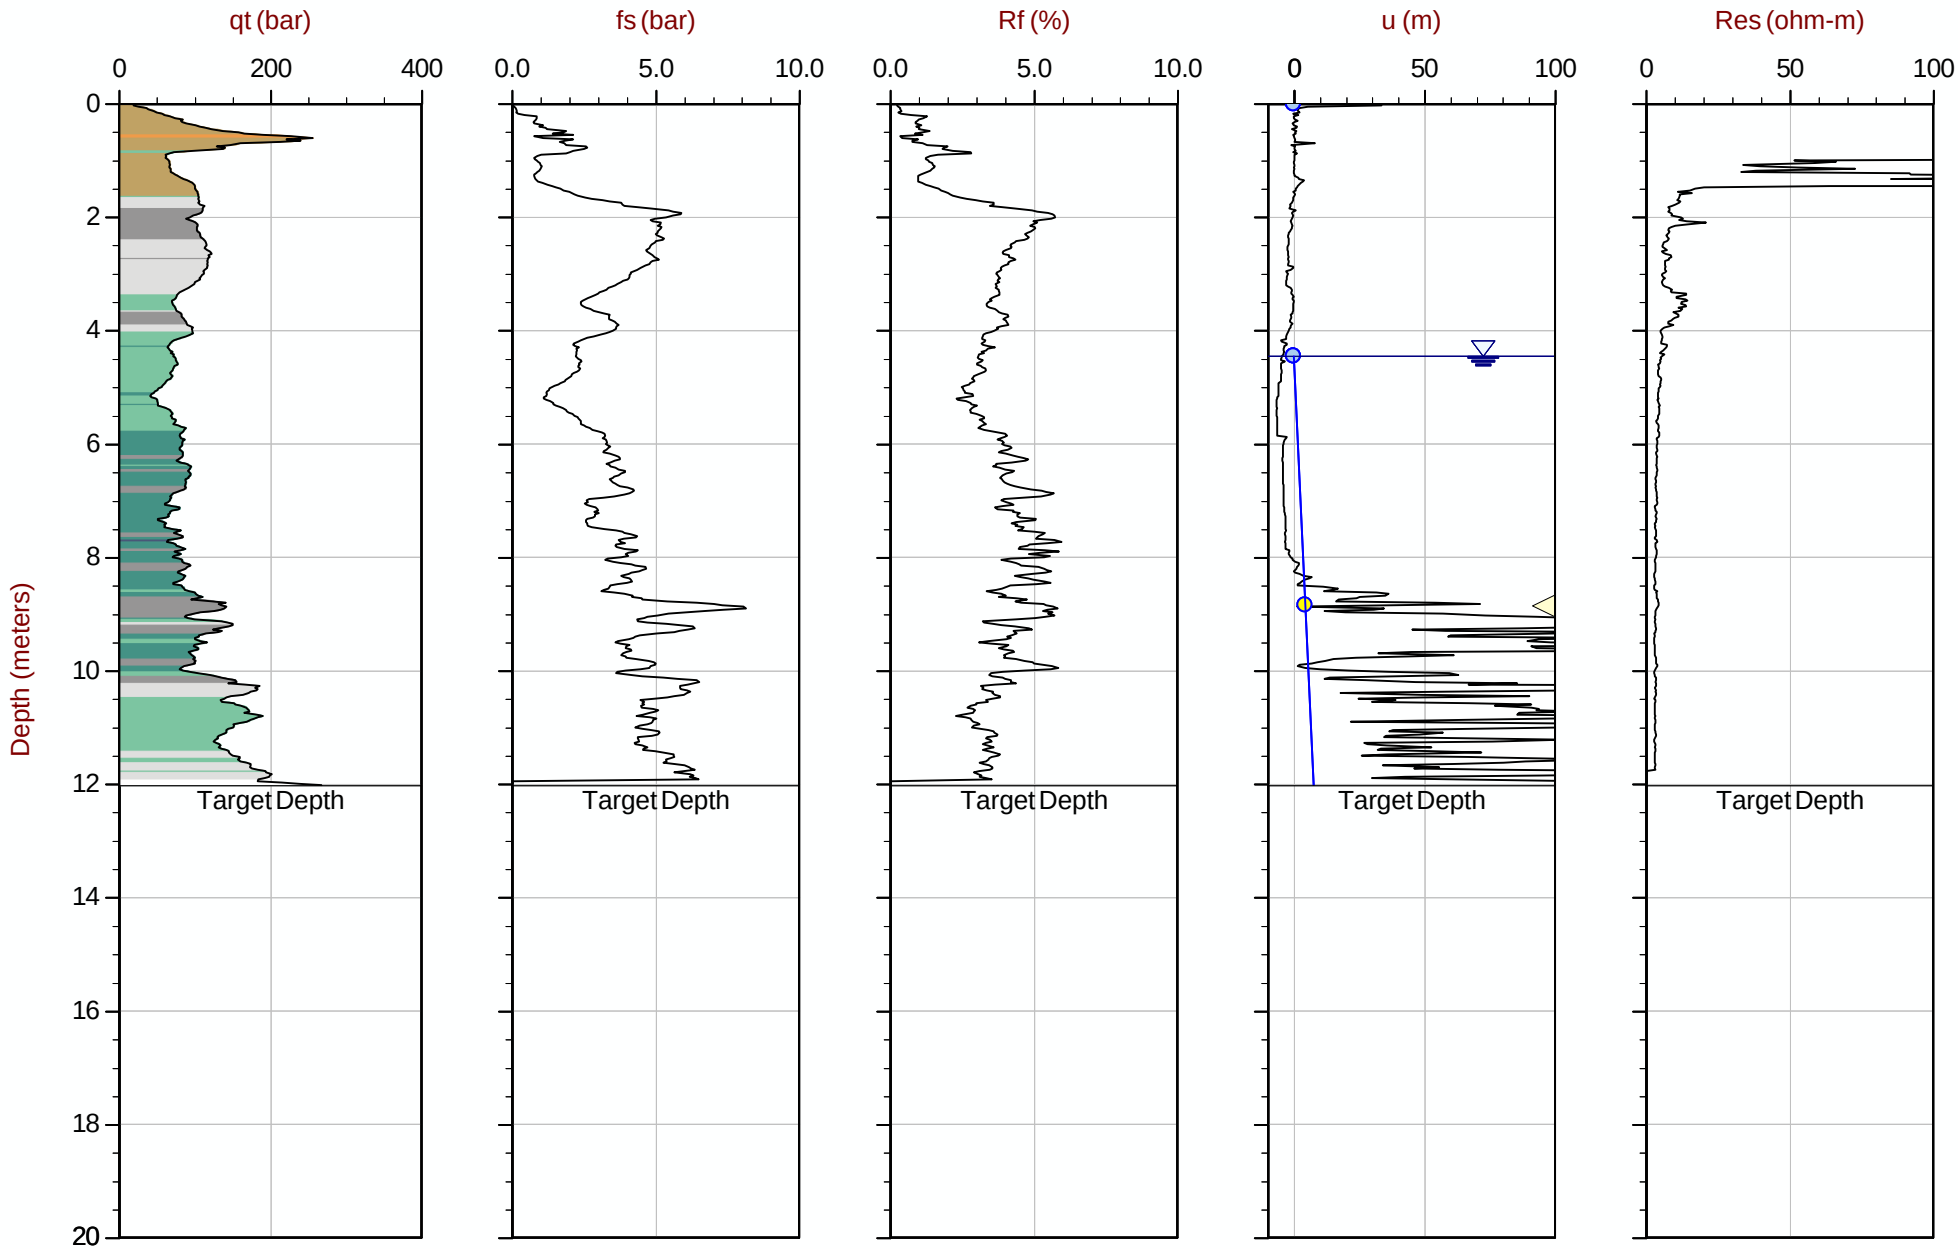

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT305.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416493m Elev: 770.908m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 06:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT306
Cone: 854:T1500F15U35 Area= 15cm2

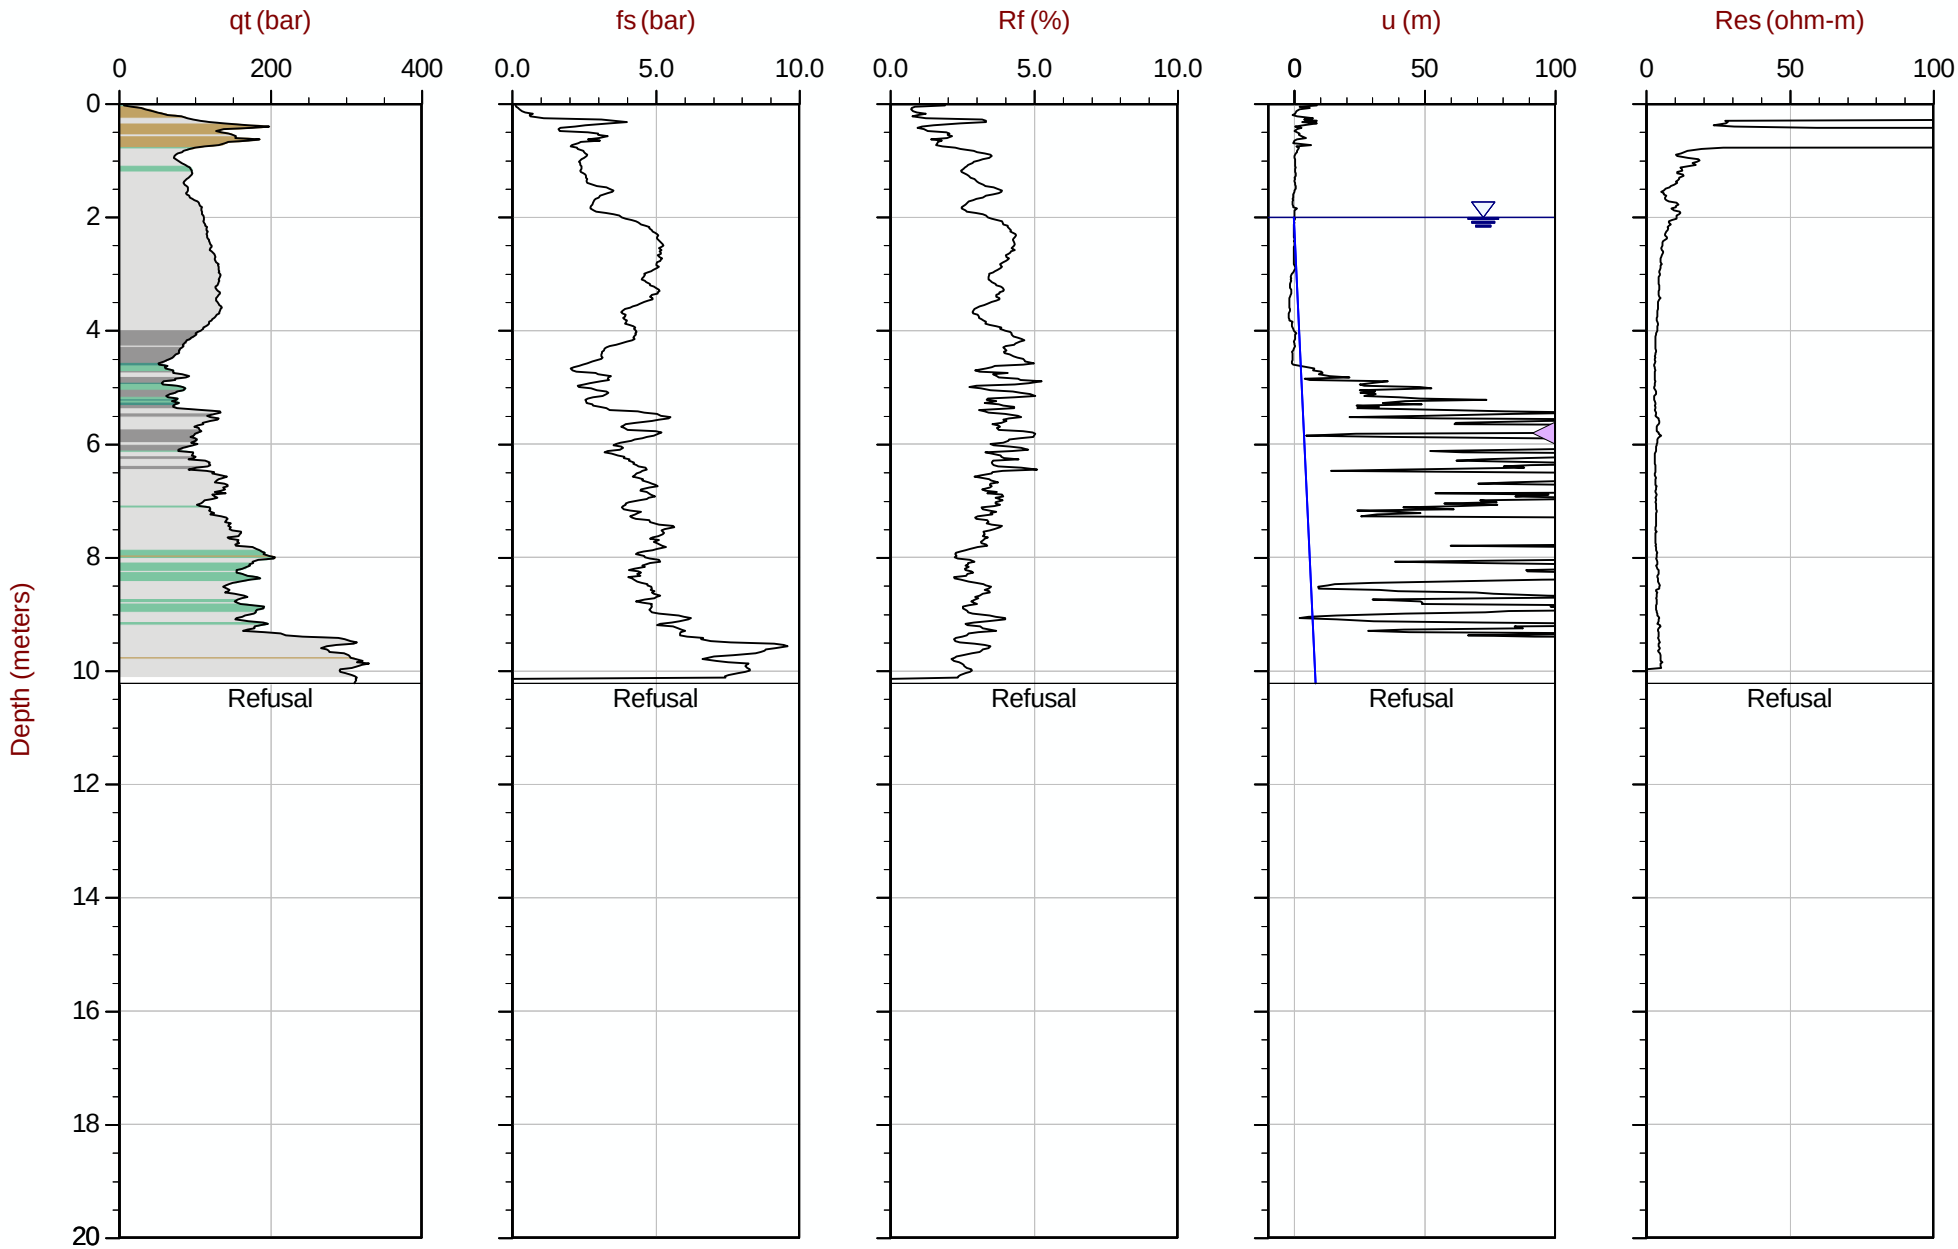

Max Depth: 10.225 m / 33.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT306.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416443m Elev: 770.594m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 09:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT307
Cone: 854:T1500F15U35 Area= 15cm2

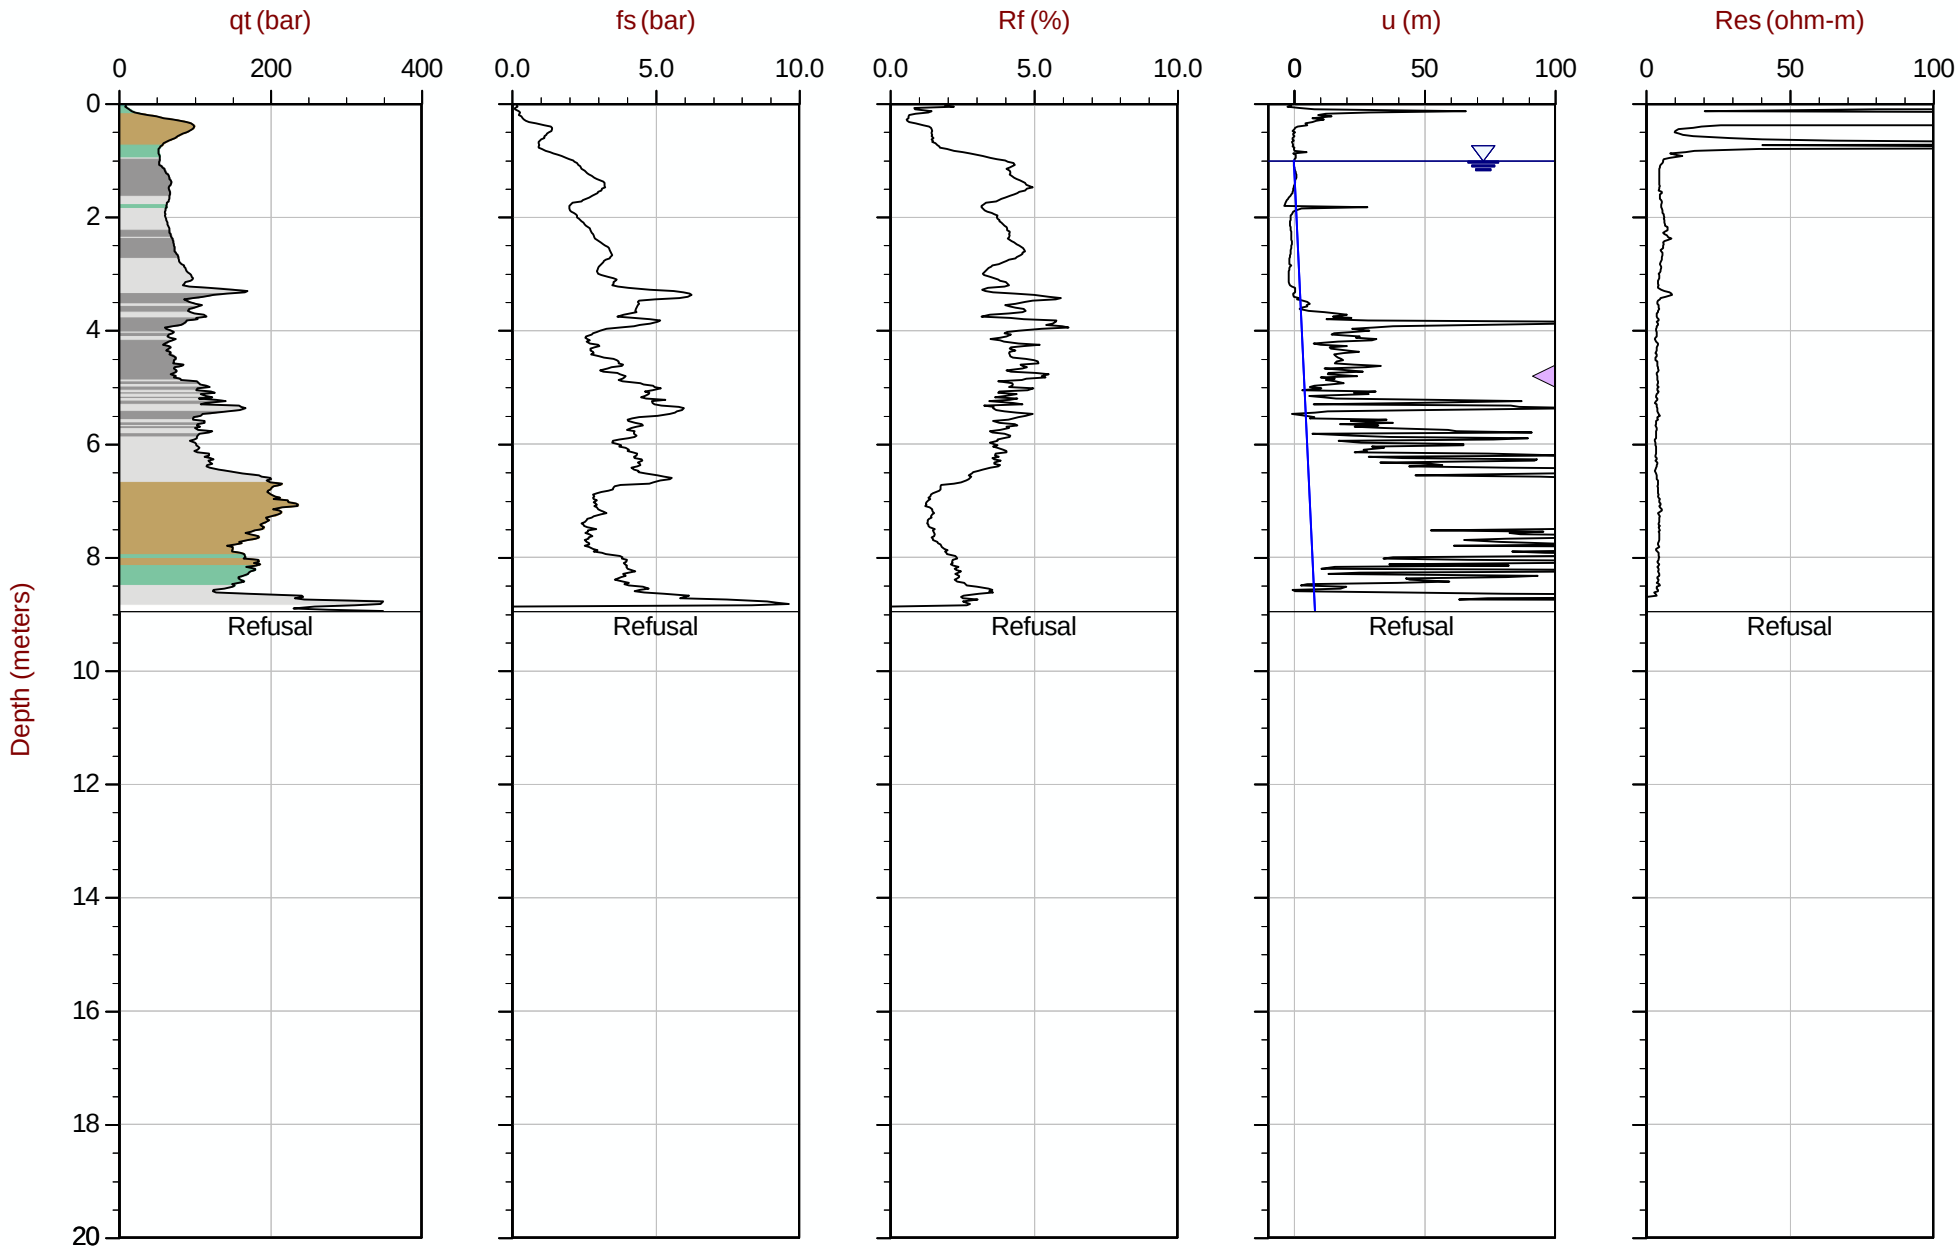

Max Depth: 8.950 m / 29.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT307.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416394m Elev: 770.324m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 10:11
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT308
Cone: 854:T1500F15U35 Area= 15cm2

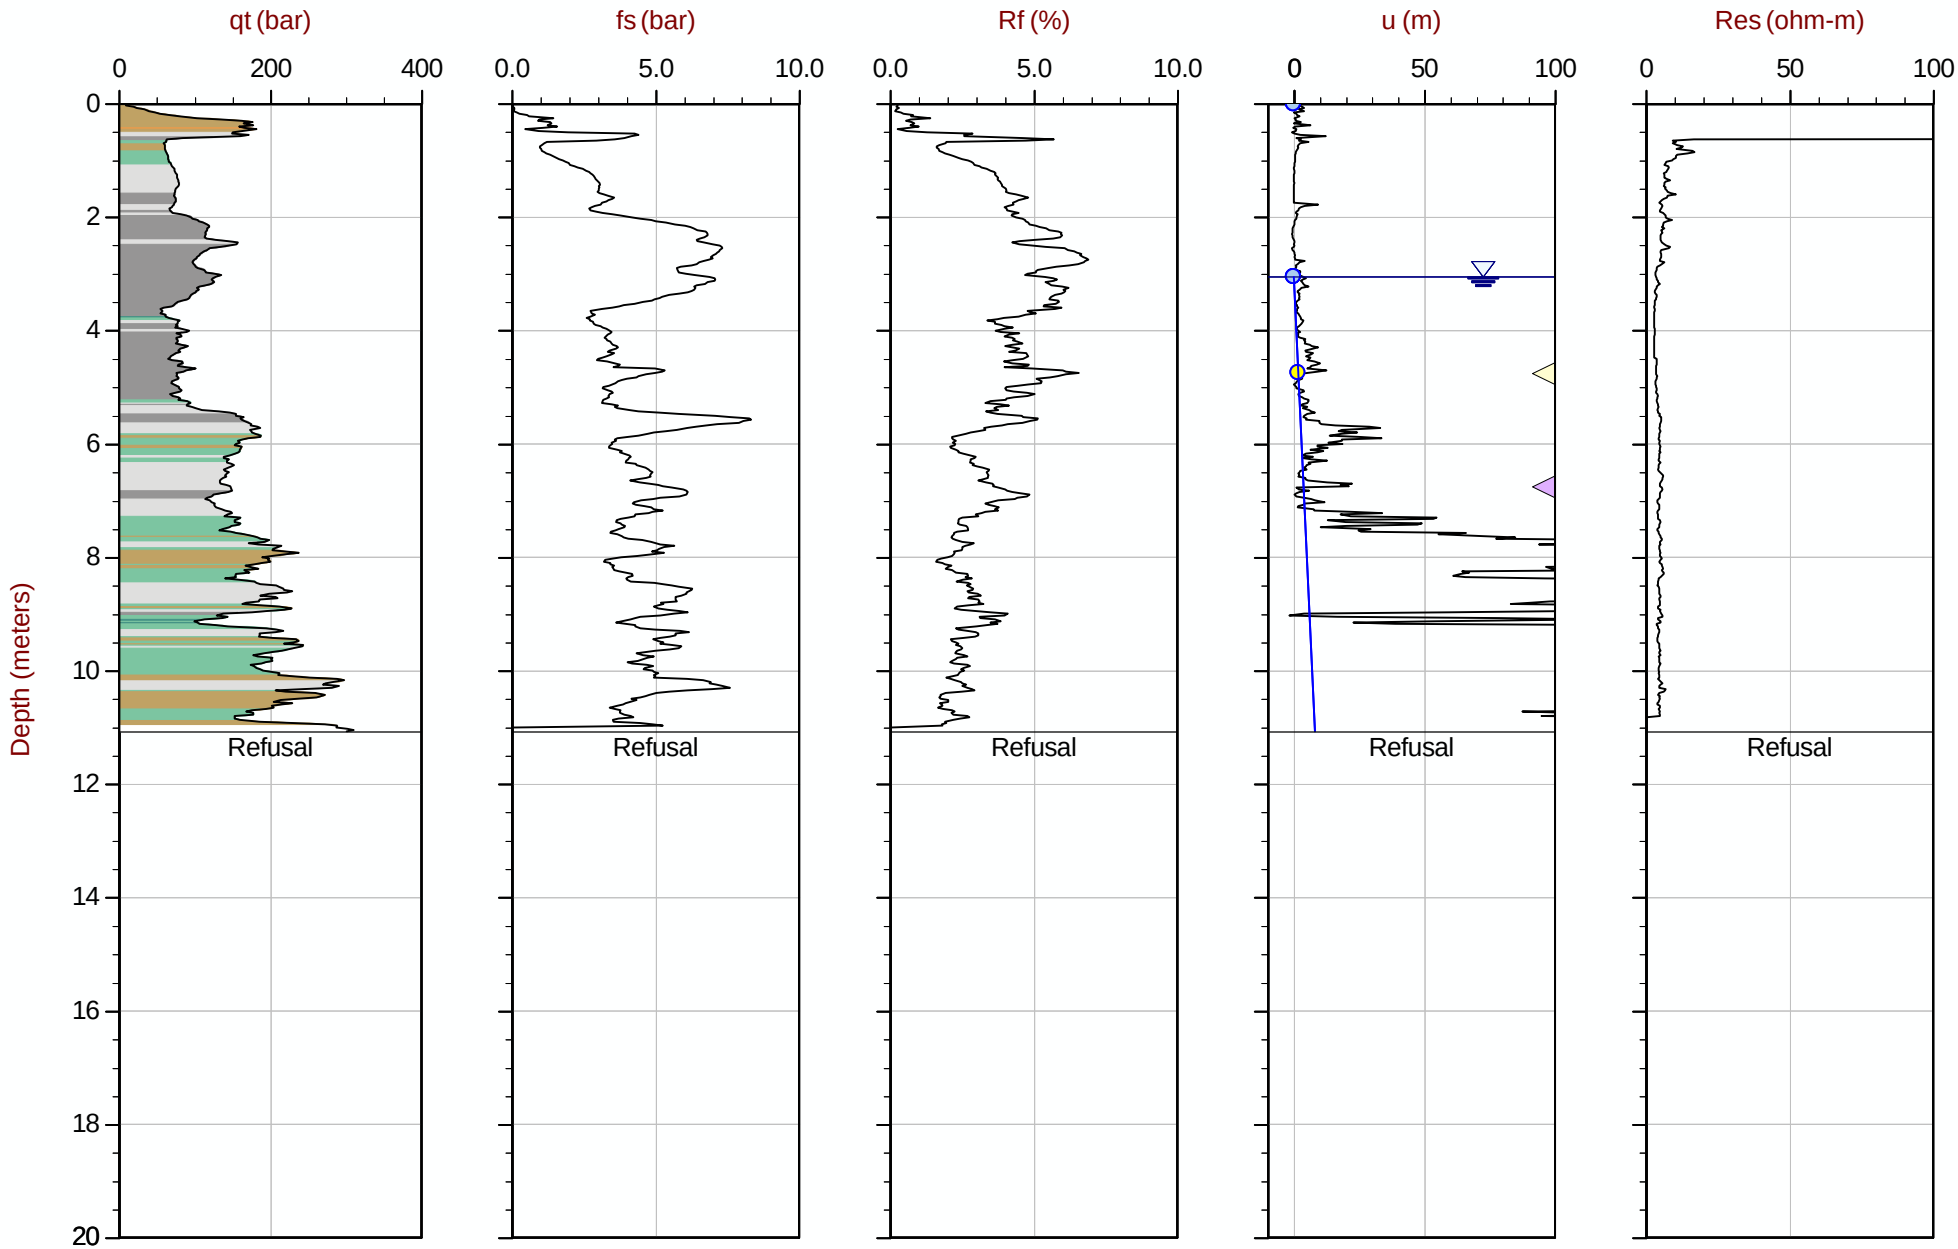

Max Depth: 11.075 m / 36.33 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT308.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416343m Elev: 770.650m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT309
Cone: 854:T1500F15U35 Area= 15cm2

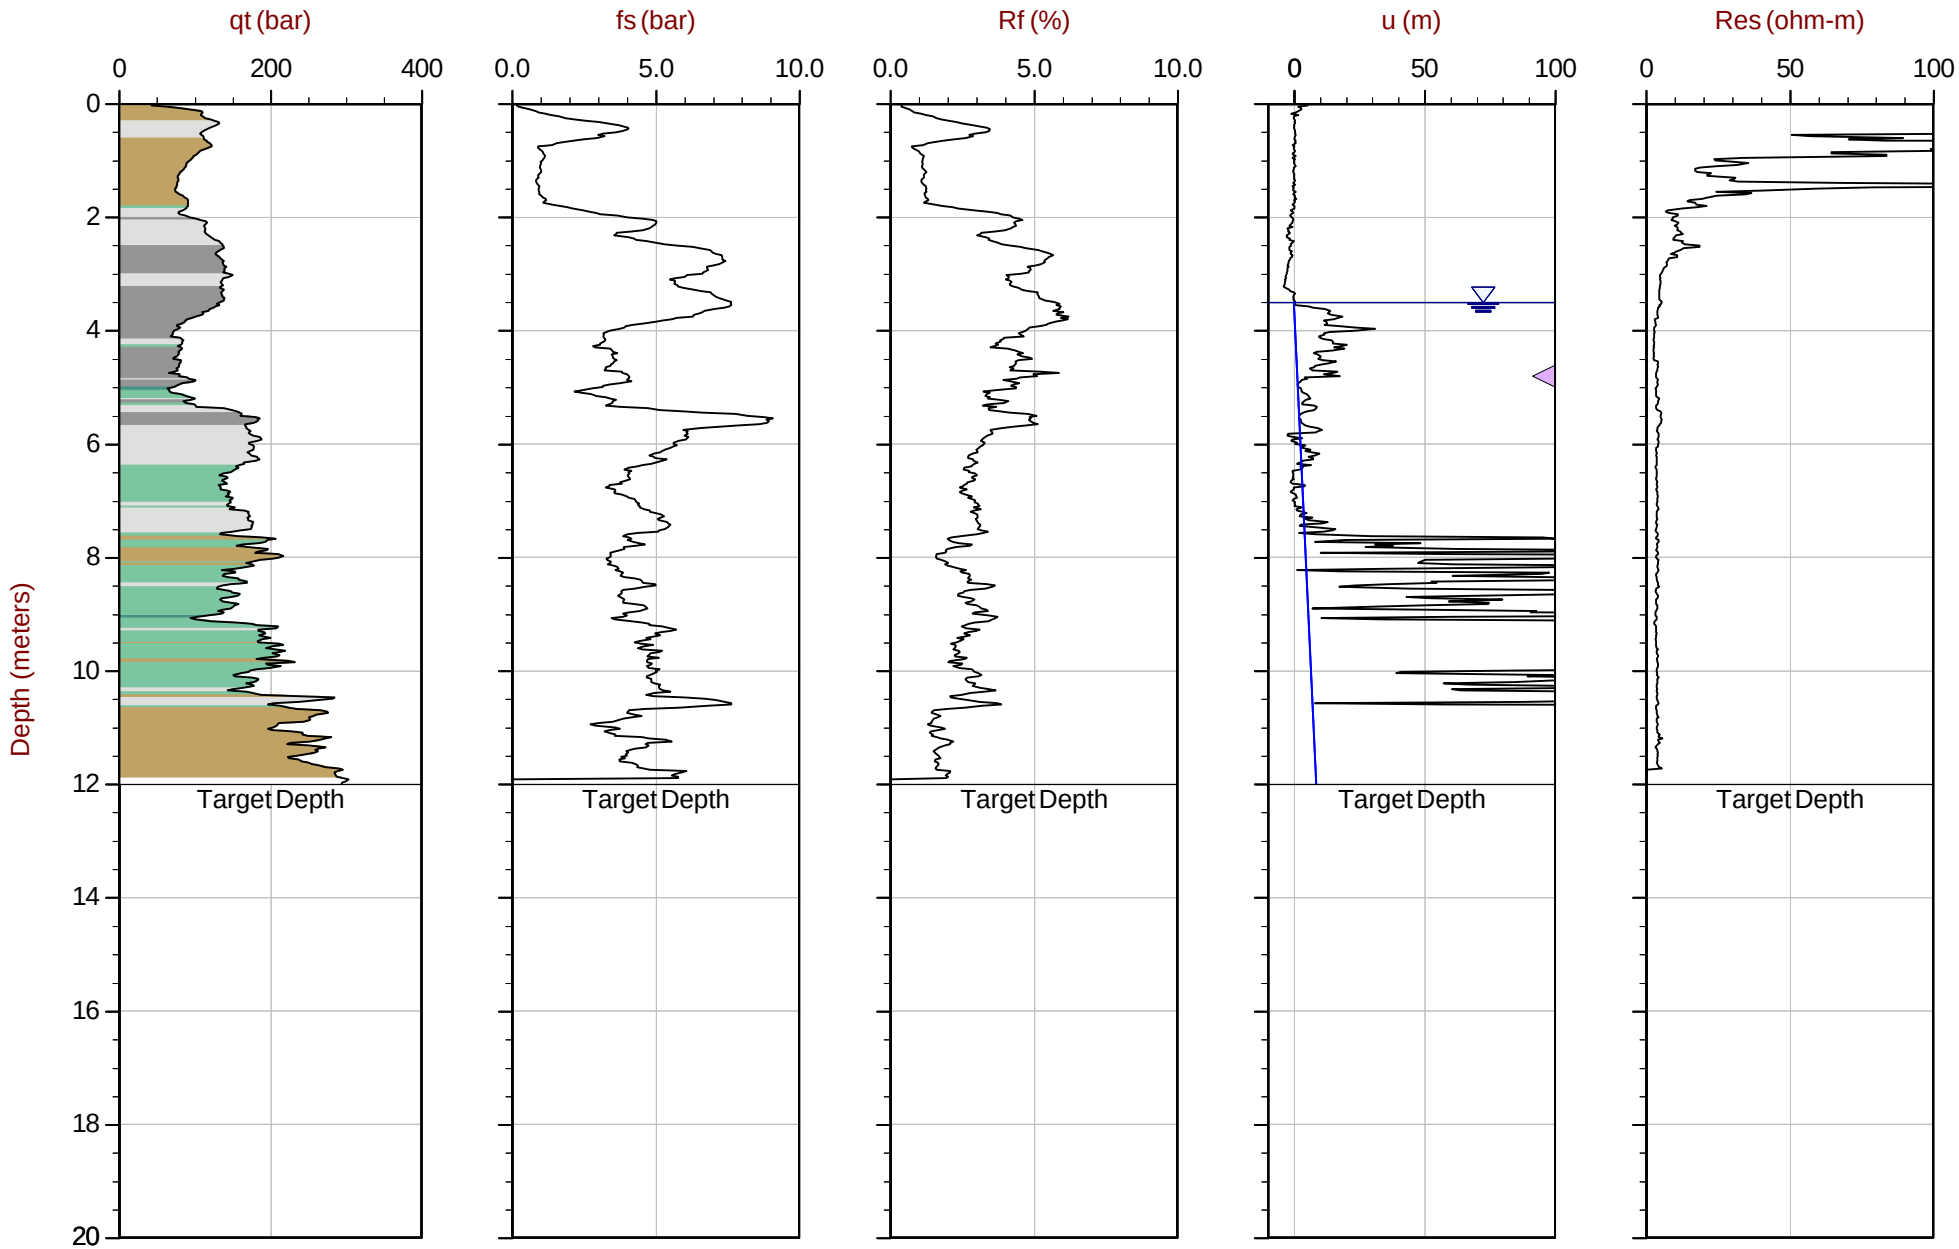

Max Depth: 12.000 m / 39.37 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT309.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416294m Elev: 771.192m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 13:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT310
Cone: 854:T1500F15U35 Area= 15cm2

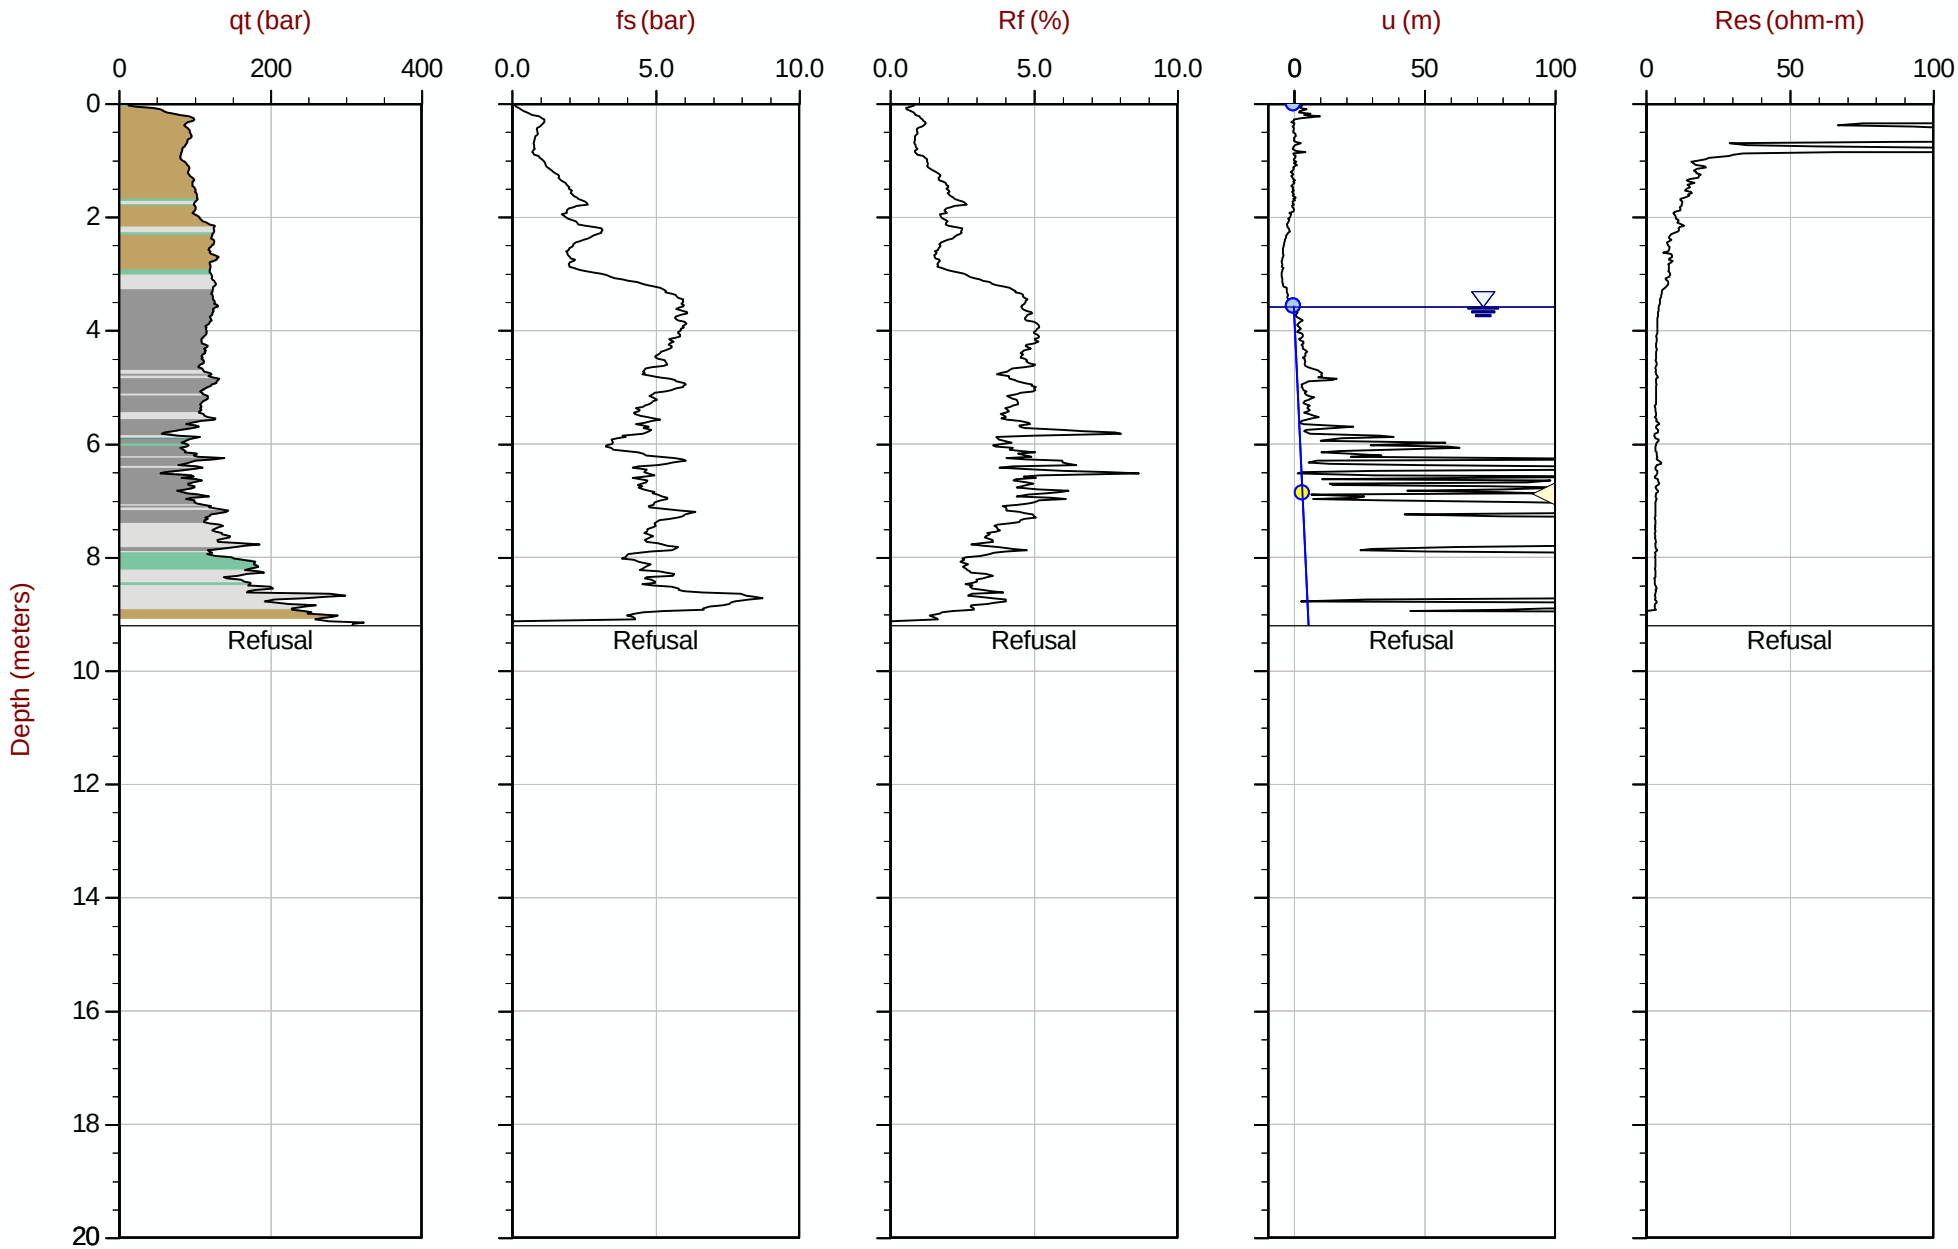

Max Depth: 9.200 m / 30.18 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT310.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416243m Elev: 771.391m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 15:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT311
Cone: 854:T1500F15U35 Area= 15cm2

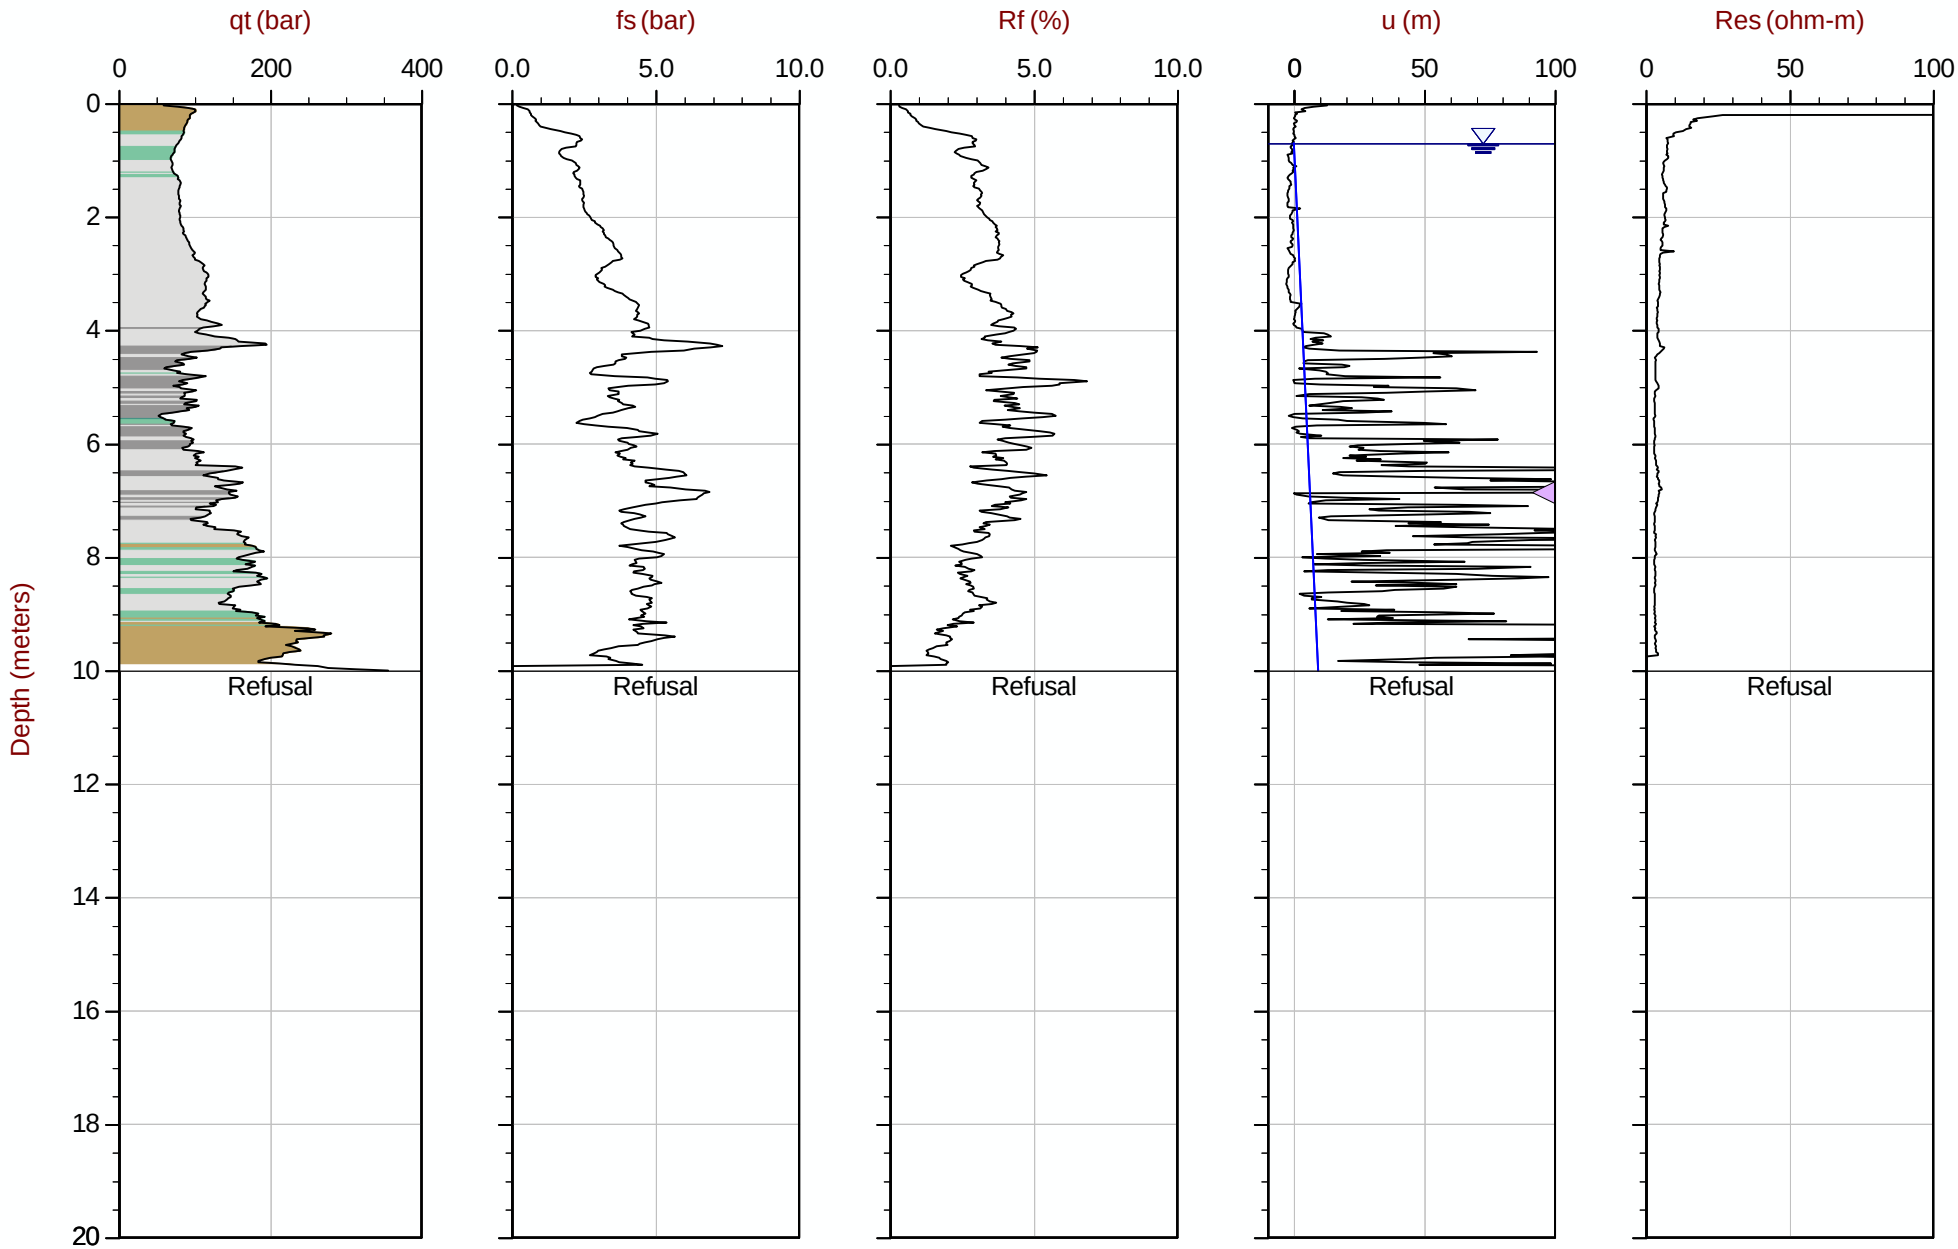

Max Depth: 10.000 m / 32.81 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT311.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416194m Elev: 771.238m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 17:01
Site: Brooks, Alberta

Sounding: RCPT22-22CPT312
Cone: 854:T1500F15U35 Area= 15cm2

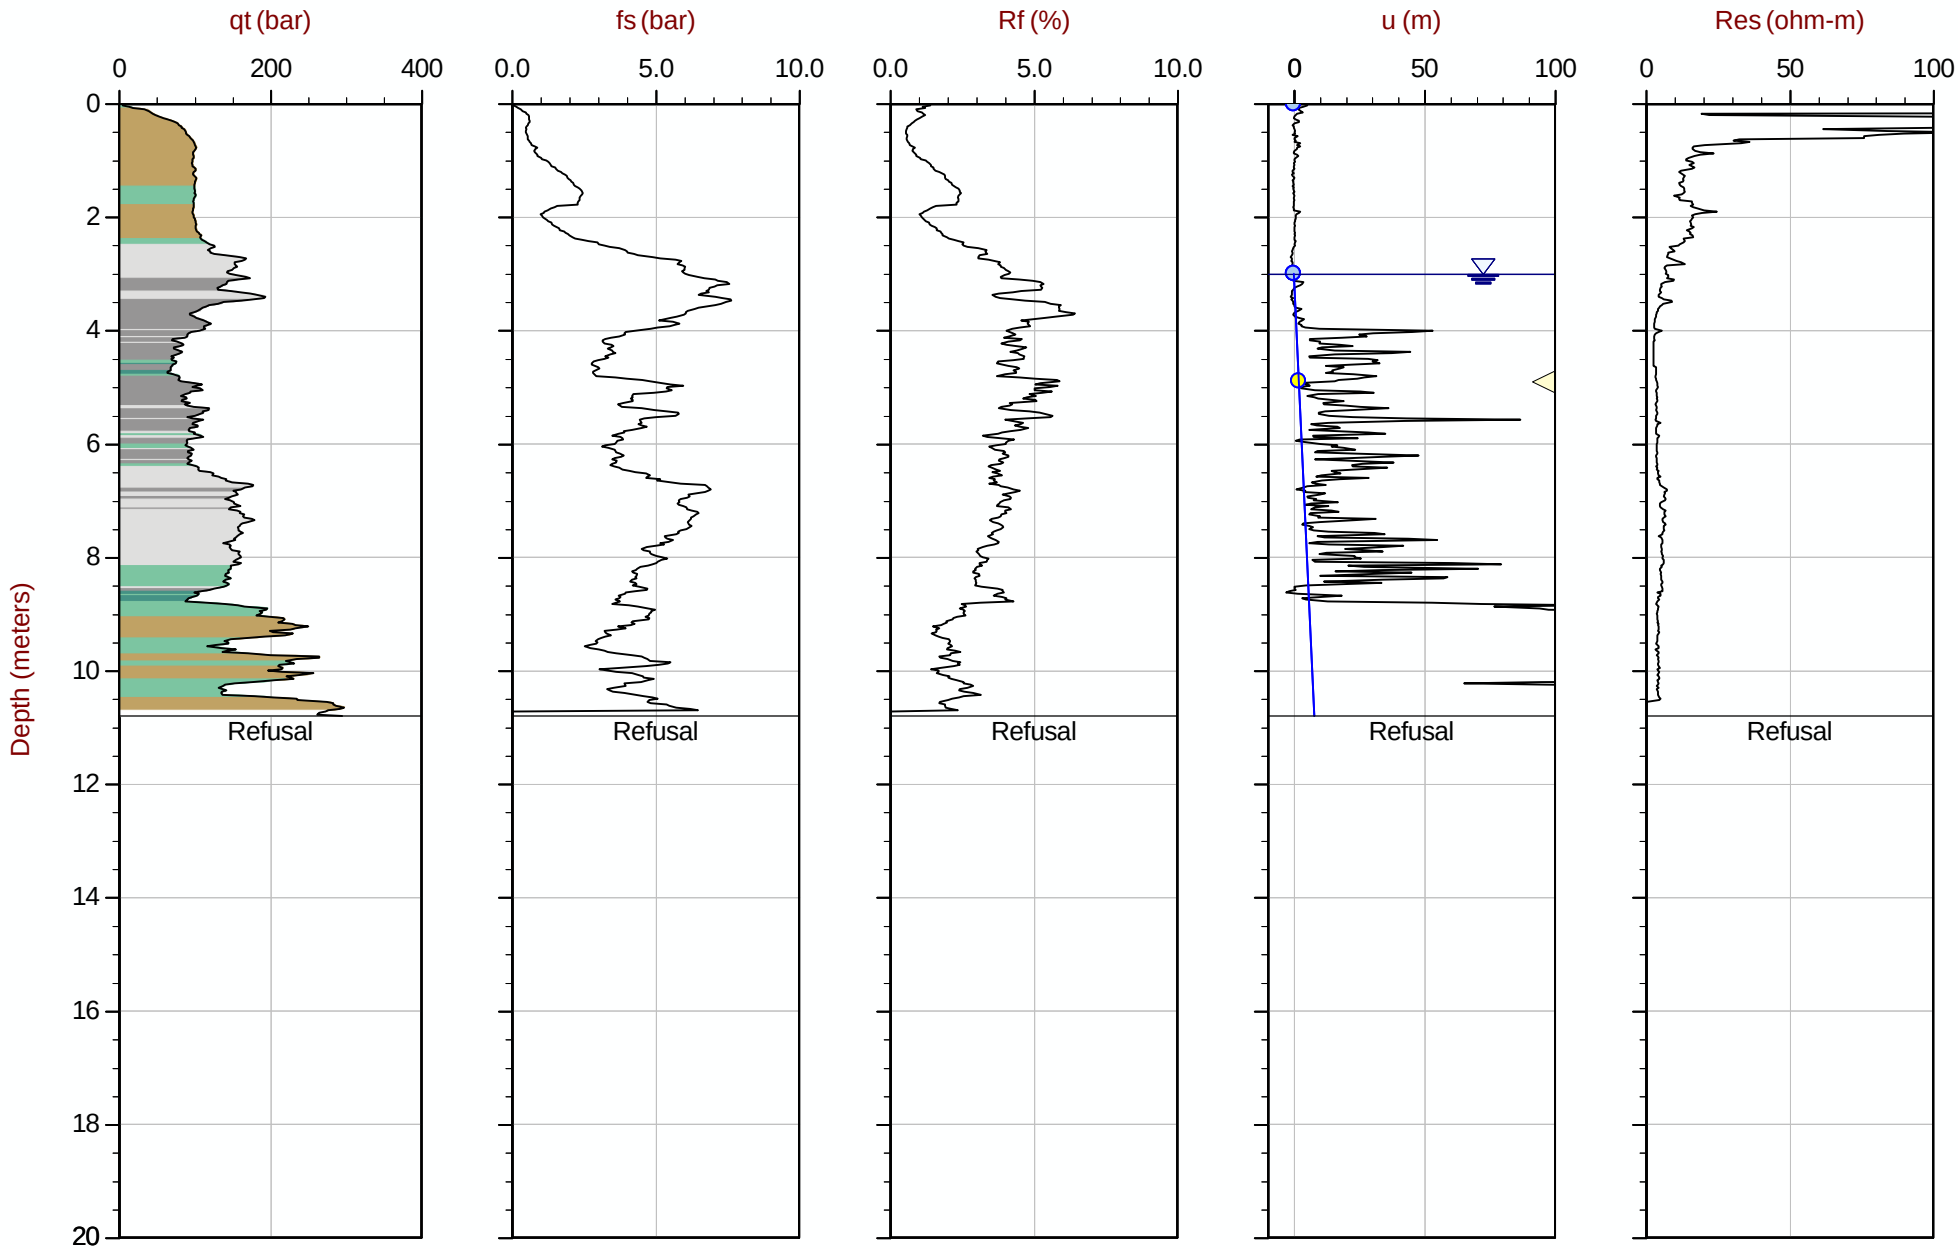

Max Depth: 10.800 m / 35.43 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT312.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416143m Elev: 771.376m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 08:55
Site: Brooks, Alberta

Sounding: RCPT22-22CPT313
Cone: 854:T1500F15U35 Area= 15cm2

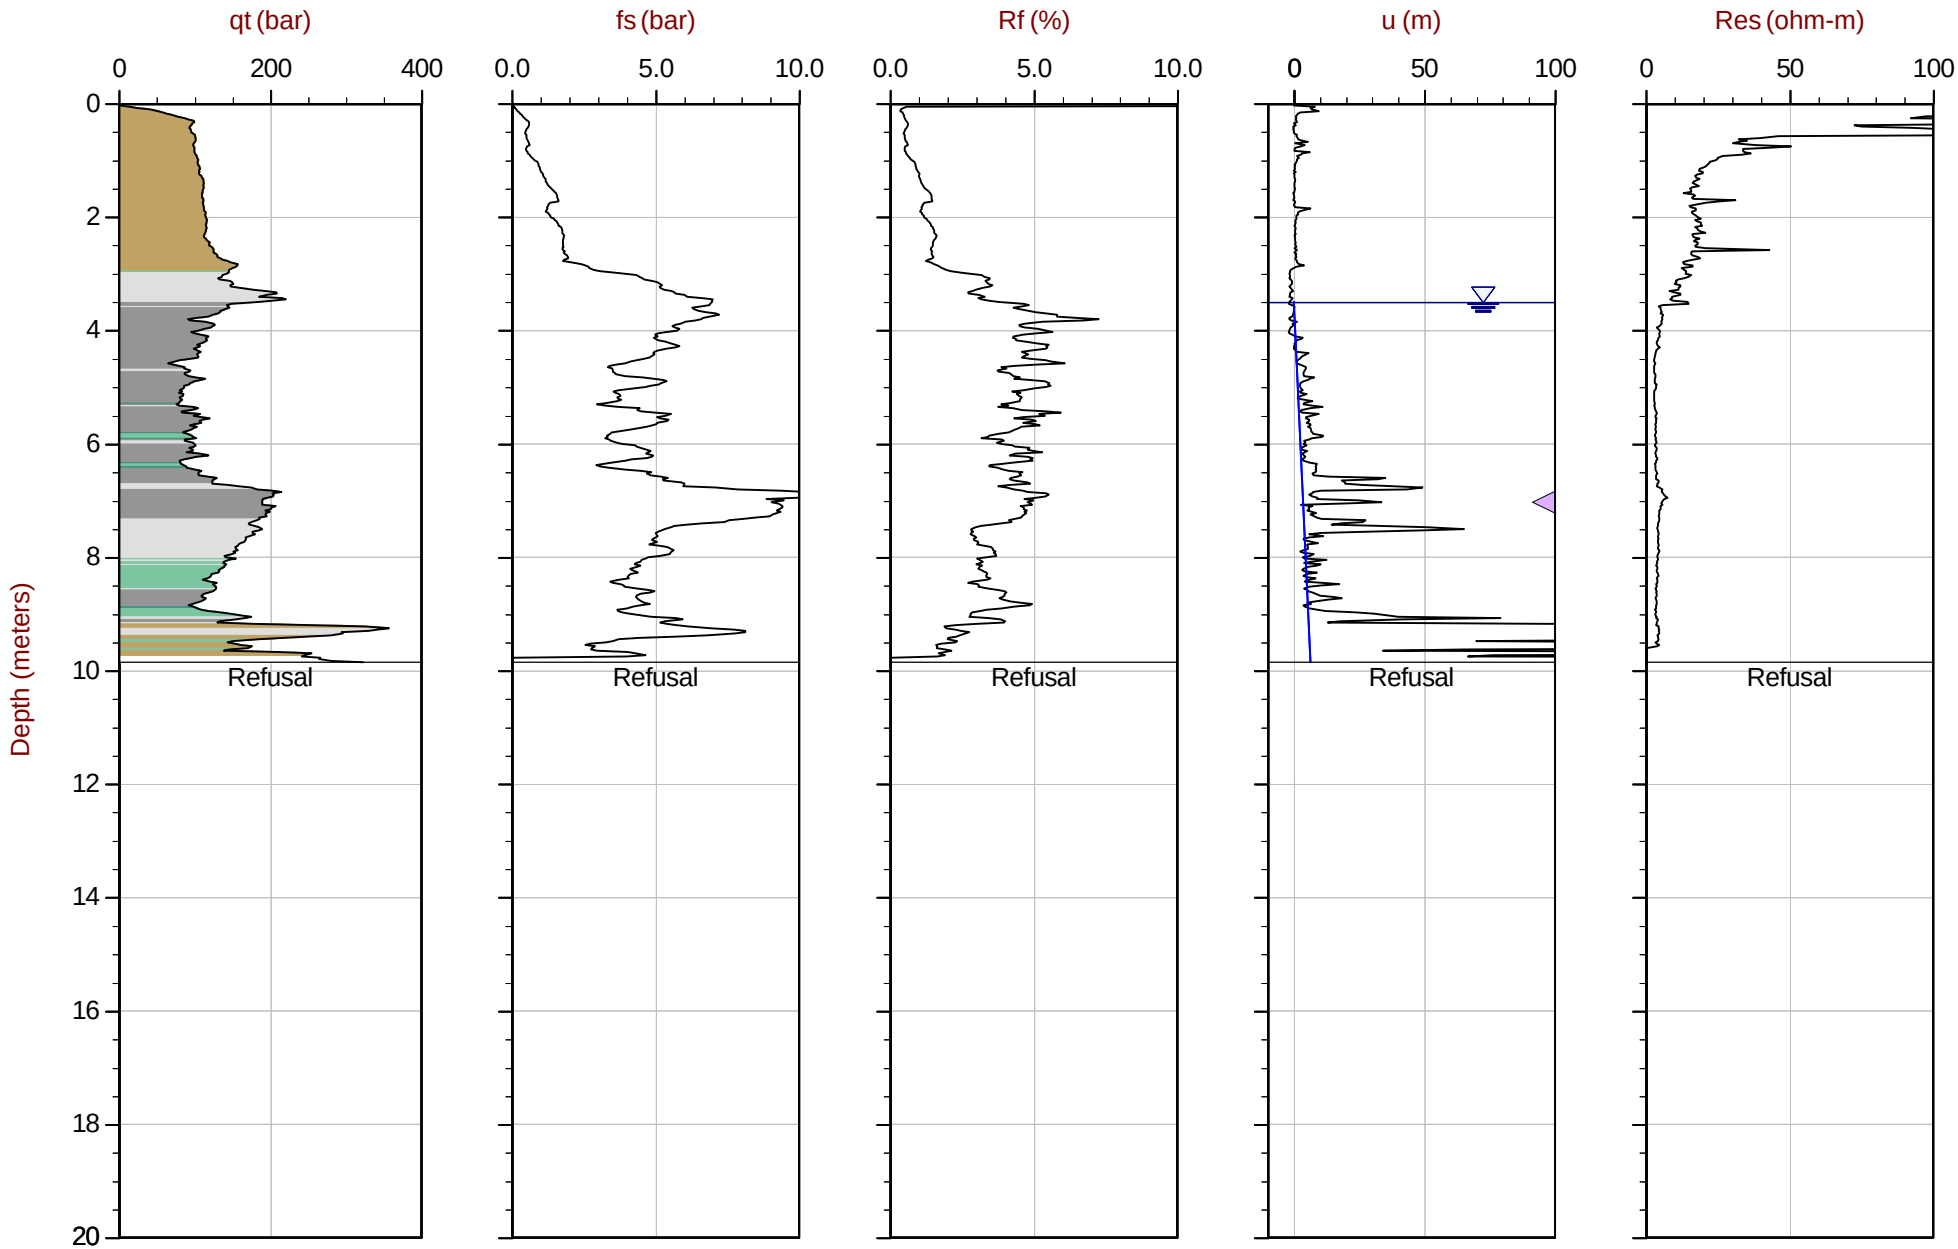

Max Depth: 9.850 m / 32.32 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT313.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416099m Elev: 771.568m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 09:56
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT314
Cone: 854:T1500F15U35 Area= 15cm2

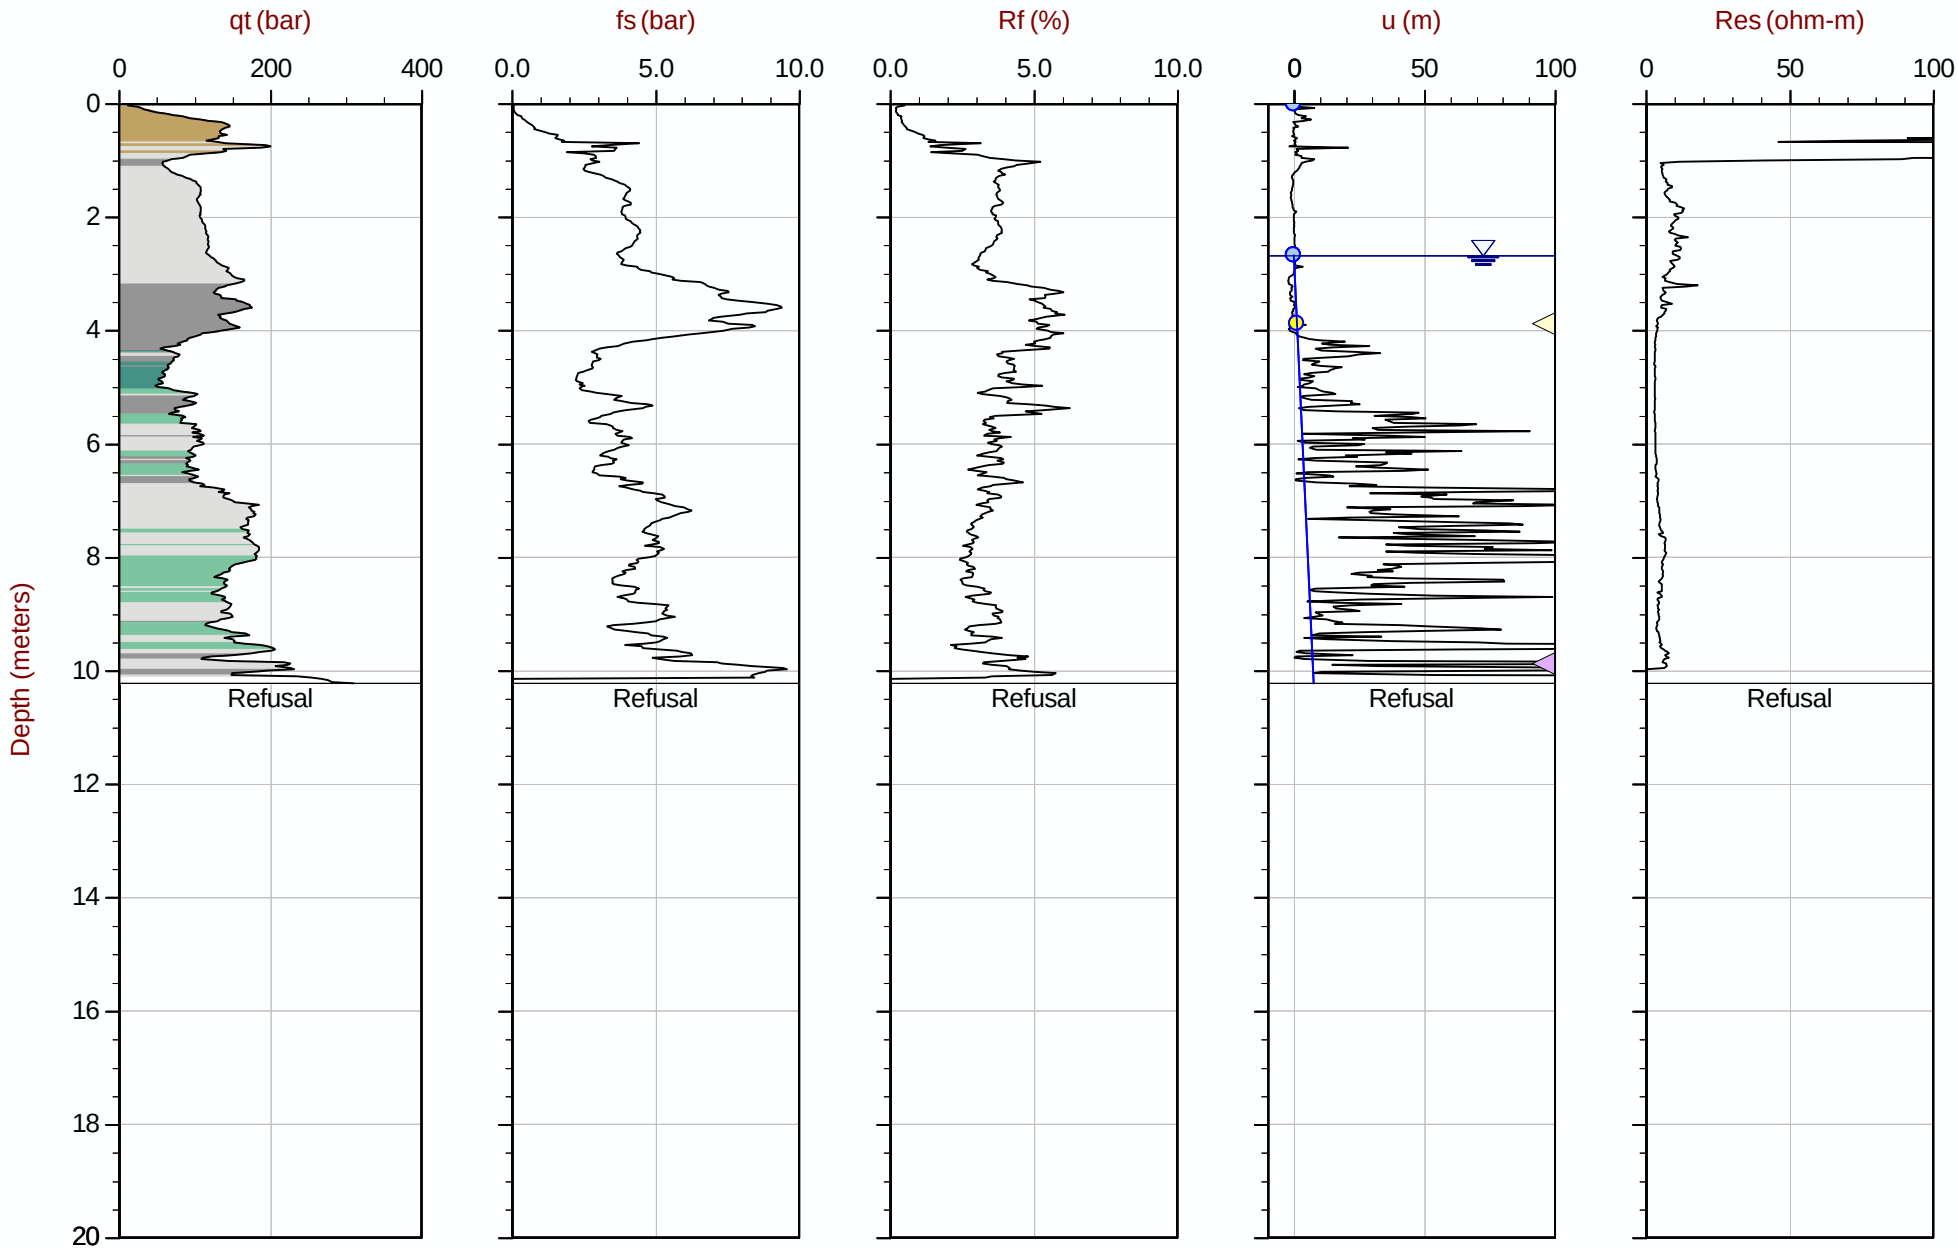

Max Depth: 10.225 m / 33.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT314.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416043m Elev: 771.585m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 12:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT315
Cone: 854:T1500F15U35 Area= 15cm2

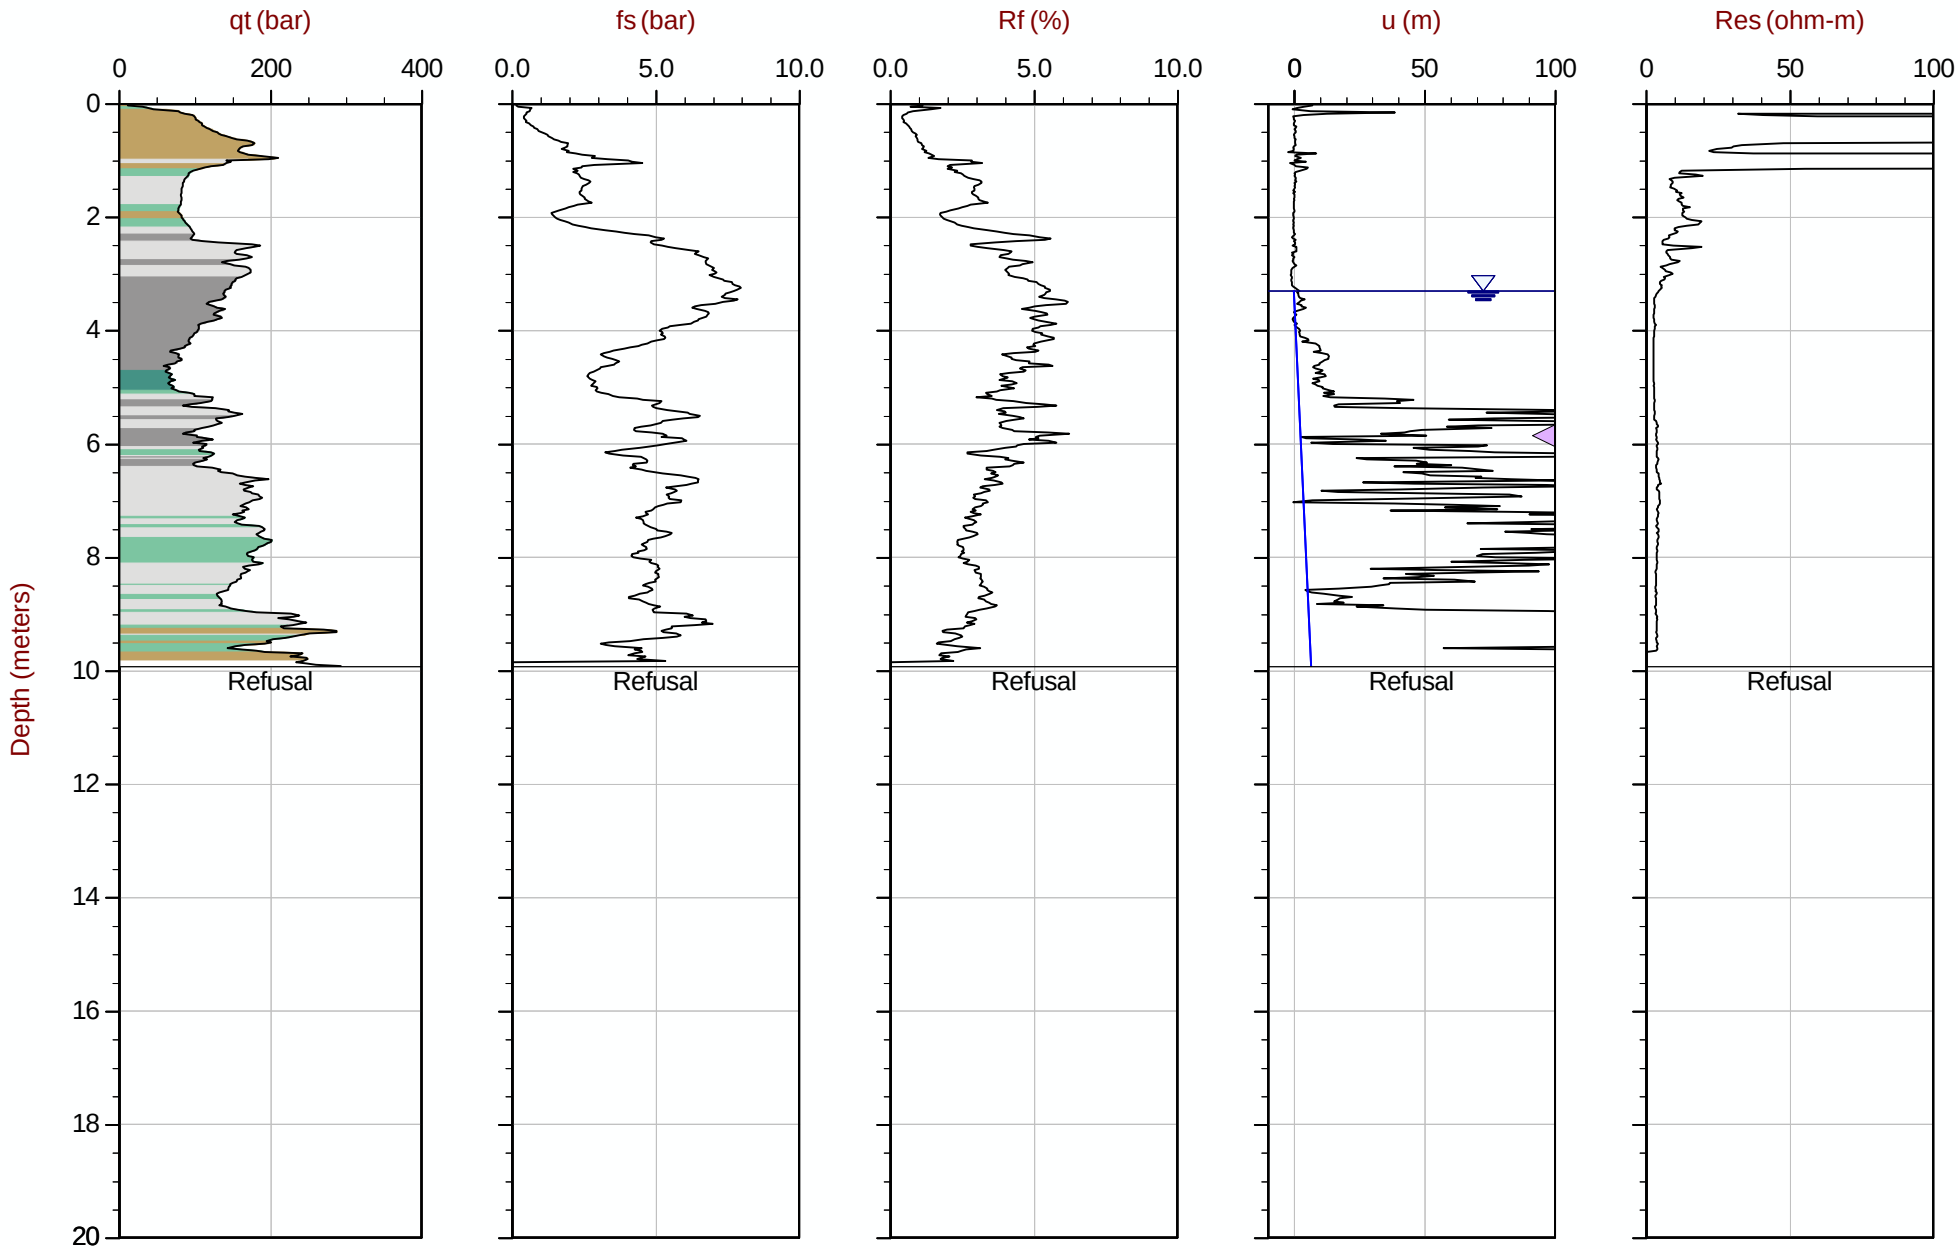

Max Depth: 9.925 m / 32.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT315.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 415990m Elev: 771.927m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 13:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT316
Cone: 854:T1500F15U35 Area= 15cm2

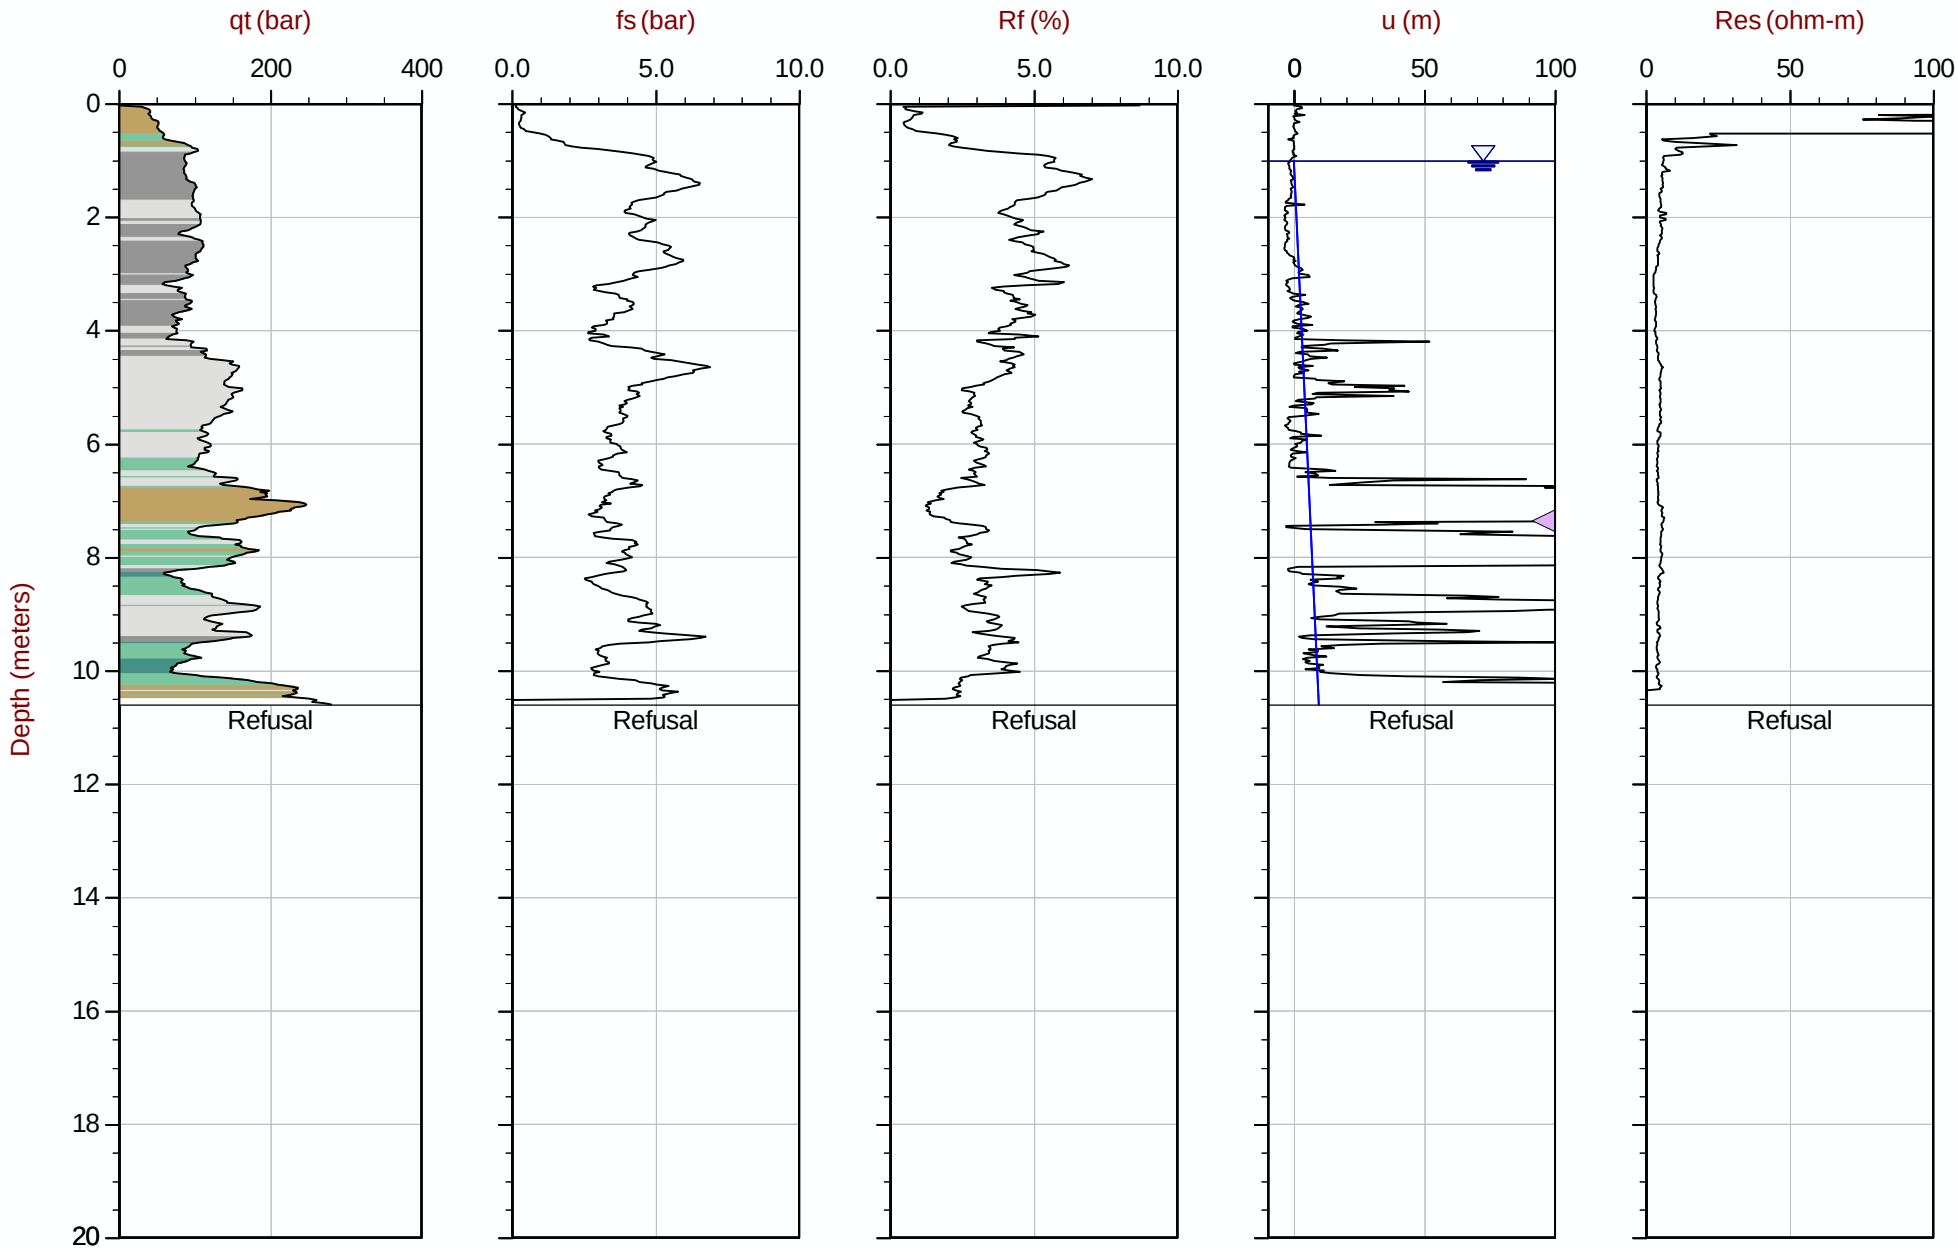

Max Depth: 10.600 m / 34.78 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT316.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609473m E: 415943m Elev: 772.448m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 14:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT317
Cone: 854:T1500F15U35 Area= 15cm2

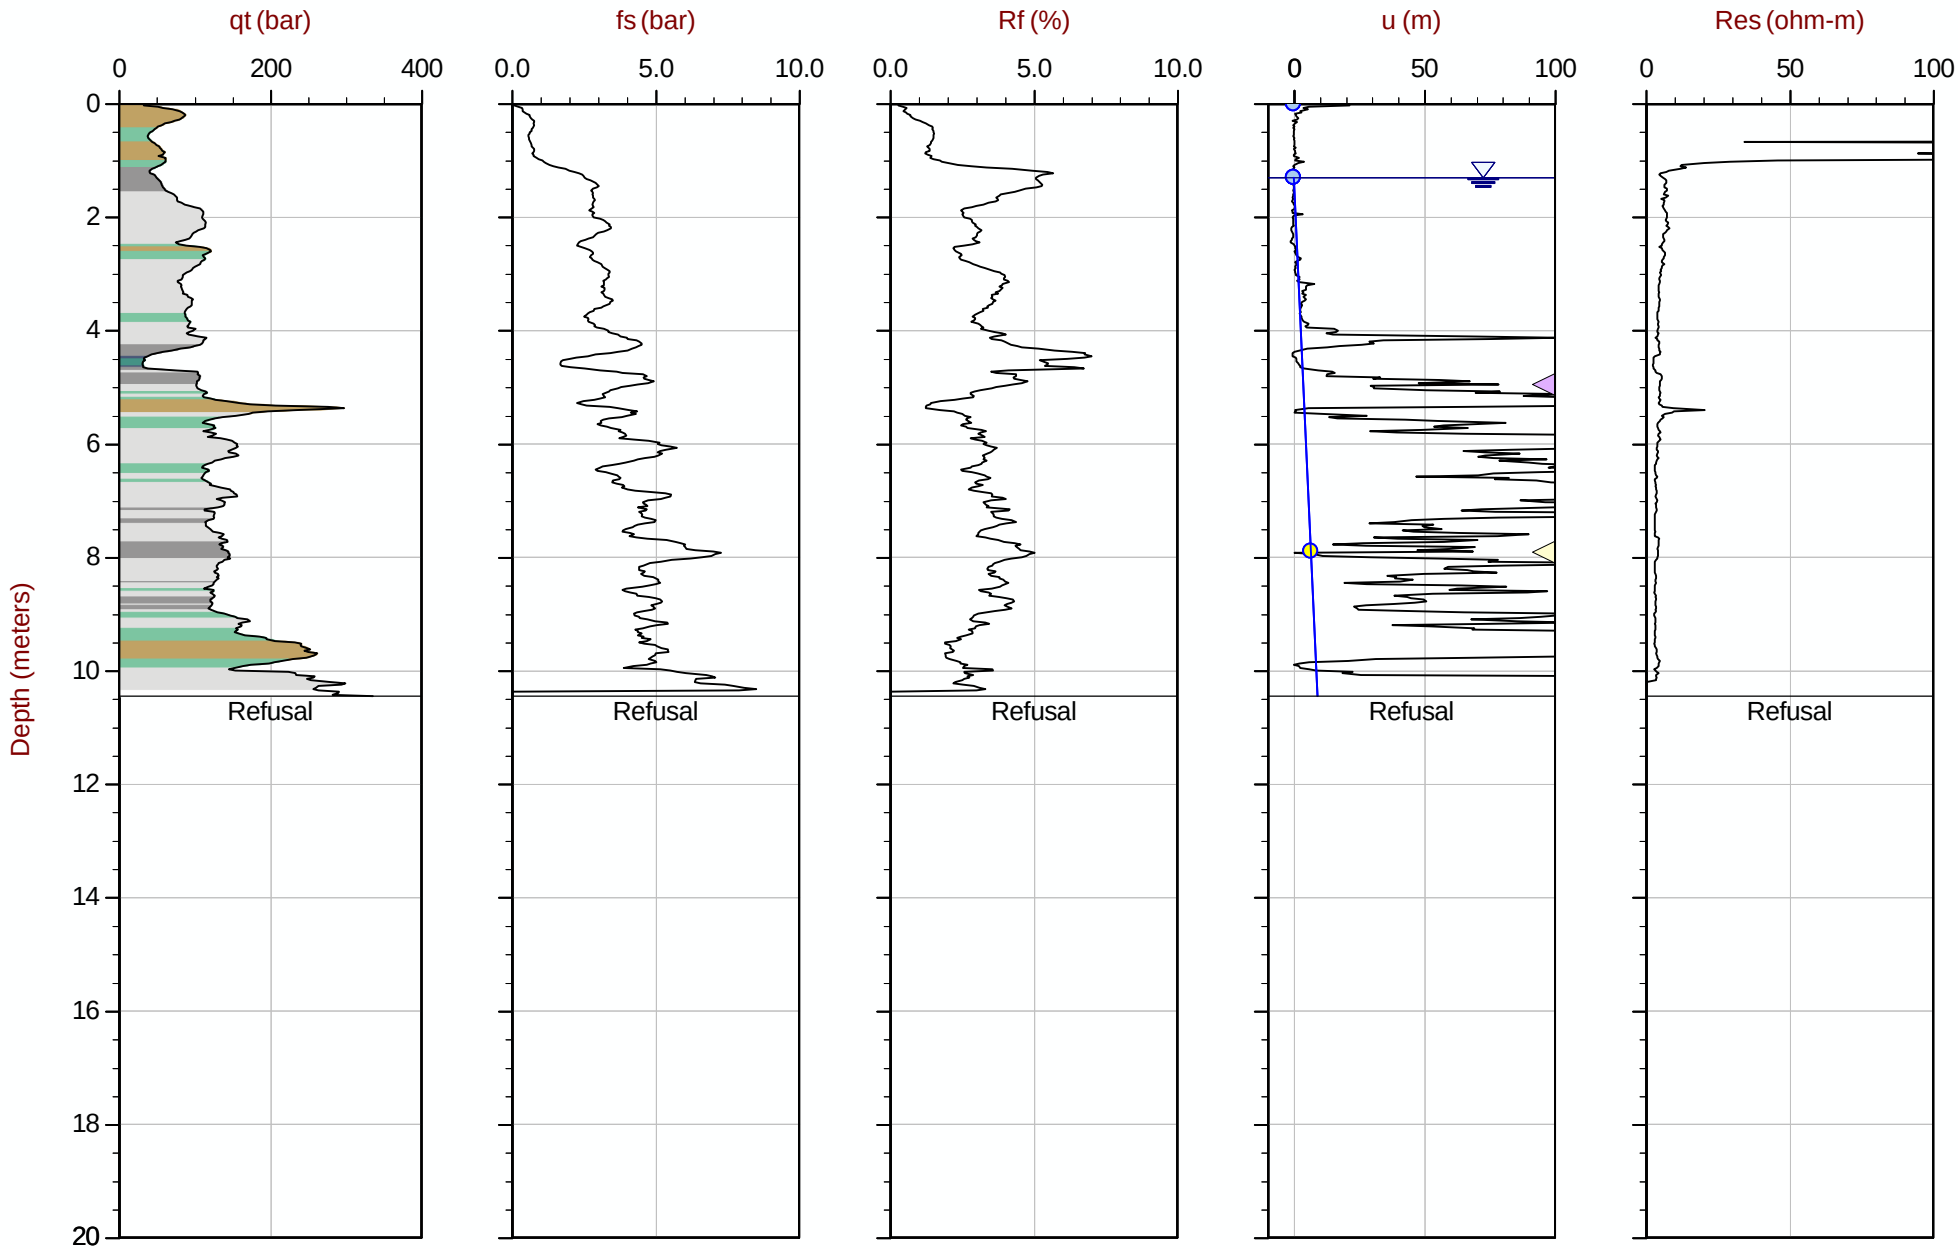

Max Depth: 10.450 m / 34.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT317.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609471m E: 415893m Elev: 773.891m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 15:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT318
Cone: 854:T1500F15U35 Area= 15cm2

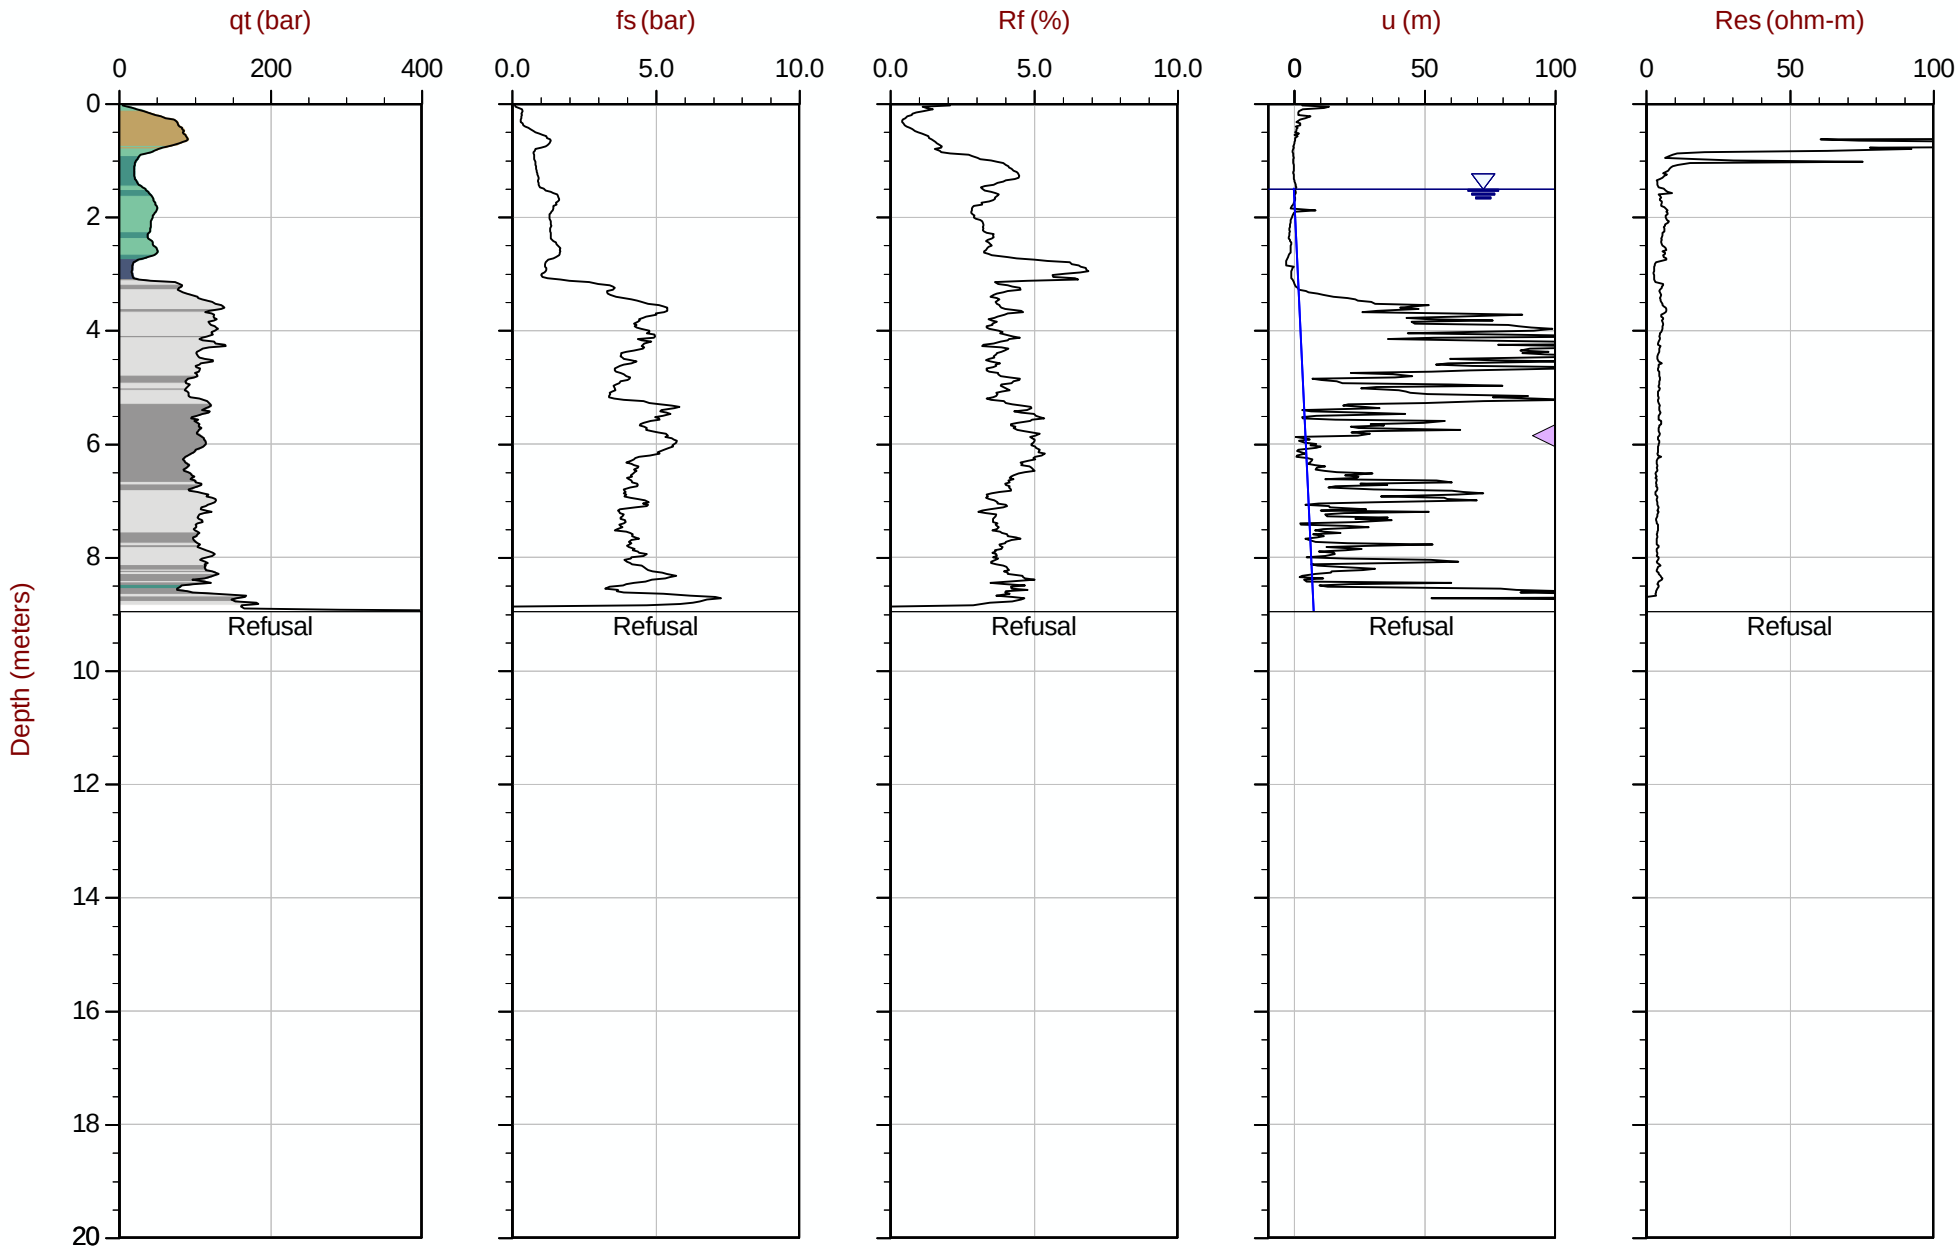

Max Depth: 8.950 m / 29.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT318.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609470m E: 415843m Elev: 772.837m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 07:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT319
Cone: 854:T1500F15U35 Area= 15cm2

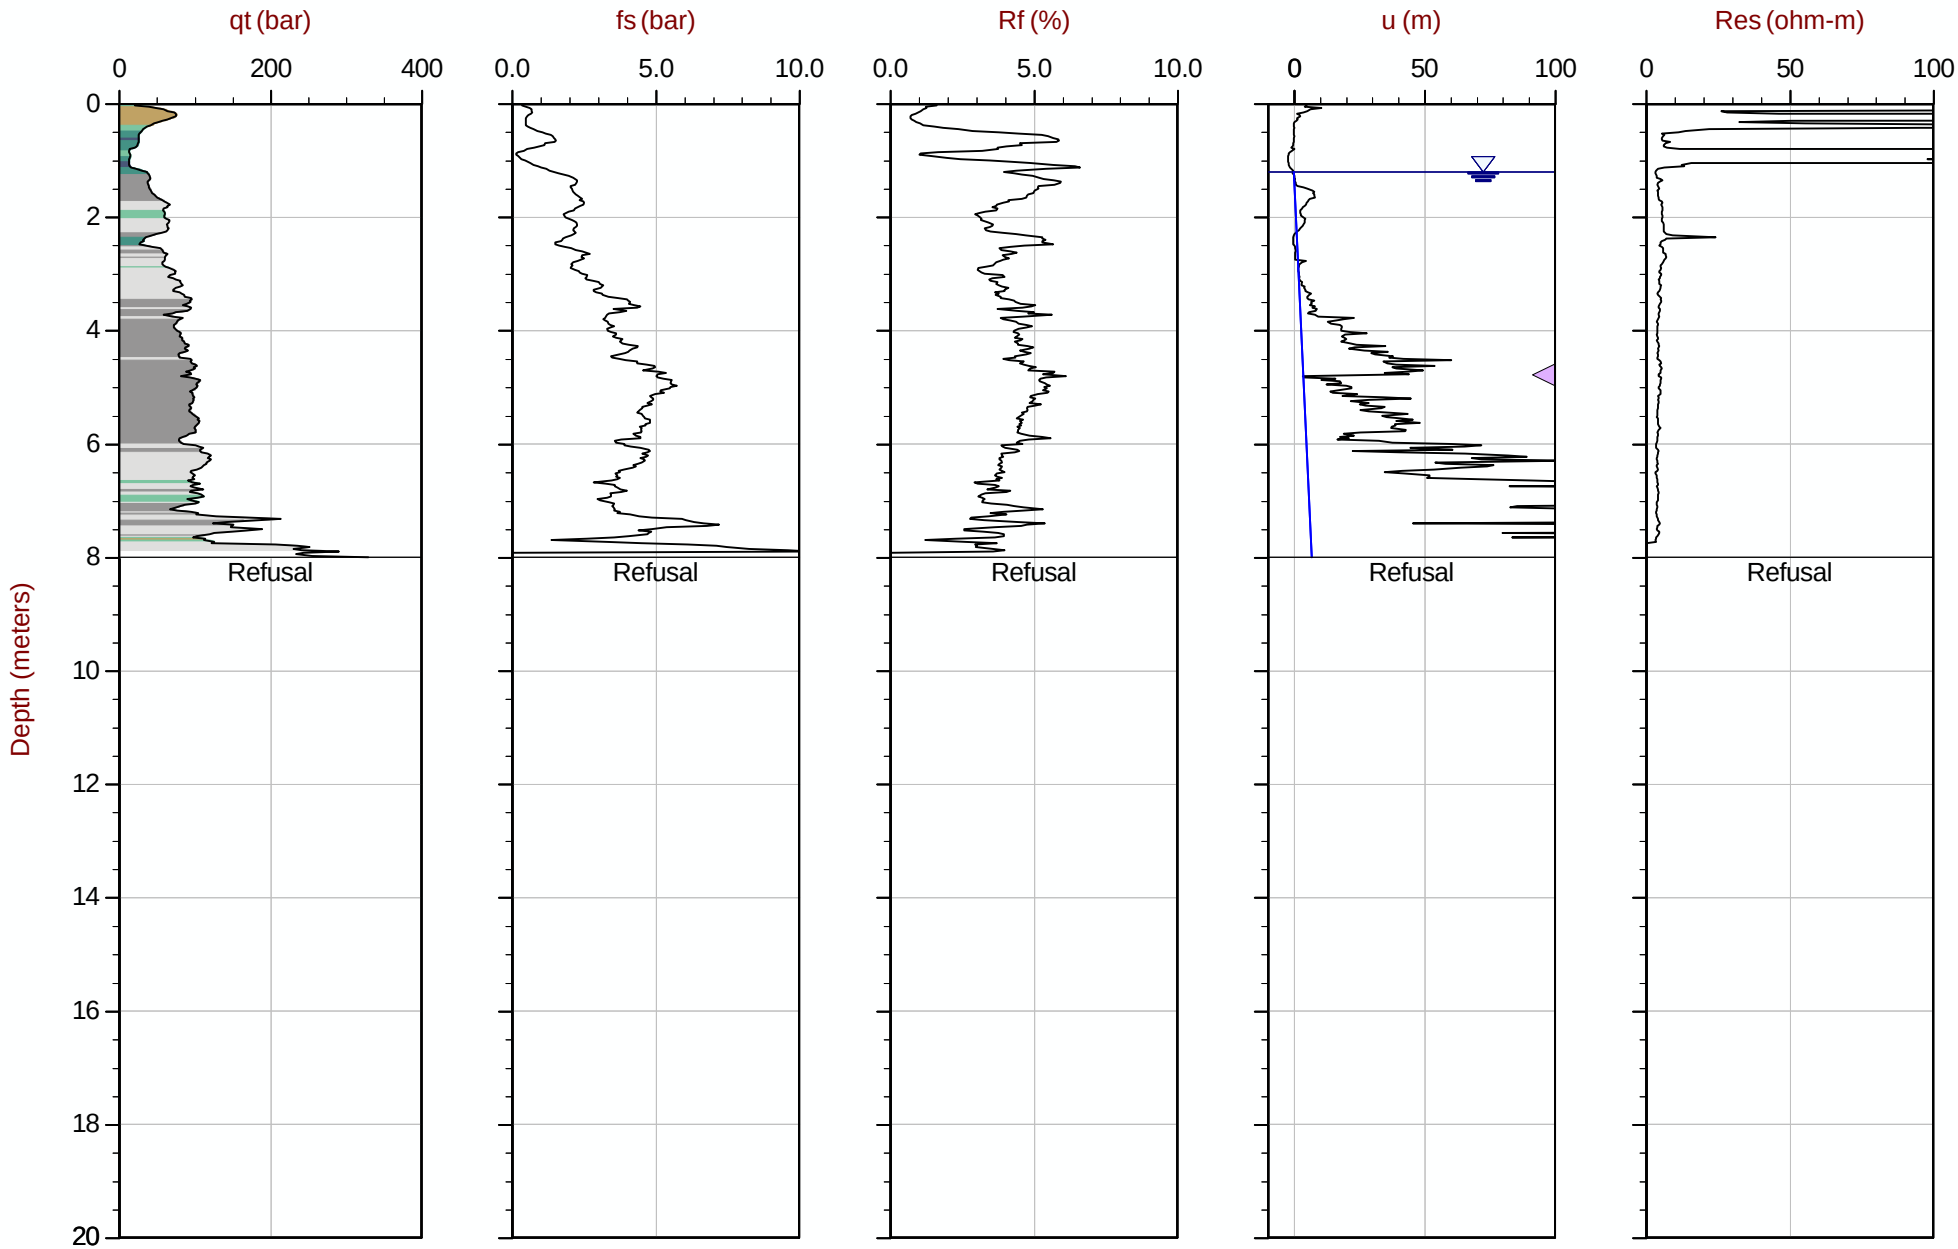

Max Depth: 8.000 m / 26.25 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT319.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609469m E: 415790m Elev: 772.623m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 08:23
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT320
Cone: 854:T1500F15U35 Area= 15cm2

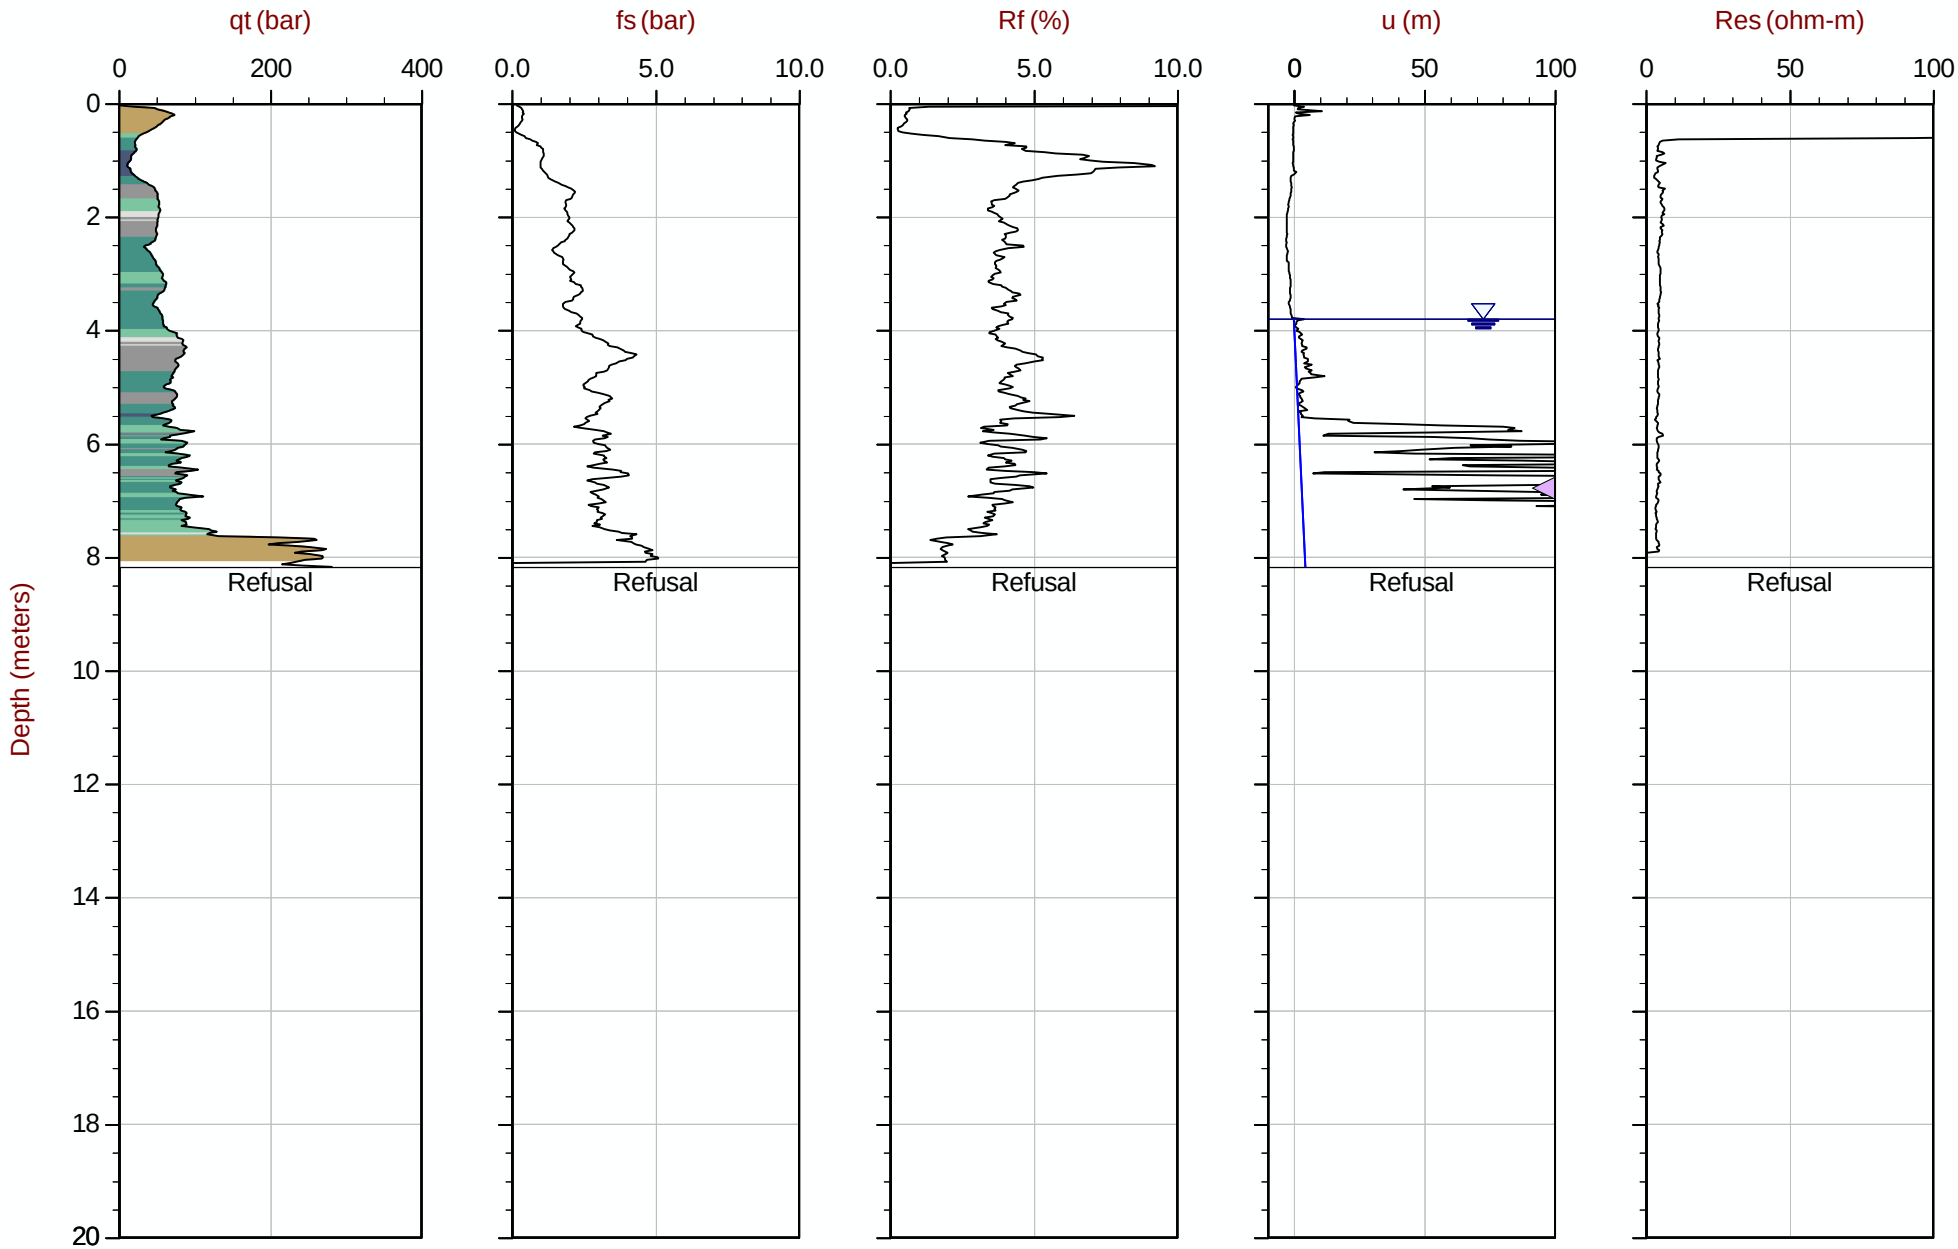

Max Depth: 8.175 m / 26.82 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT320.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609467m E: 415743m Elev: 773.059m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 10:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT321
Cone: 854:T1500F15U35 Area= 15cm2

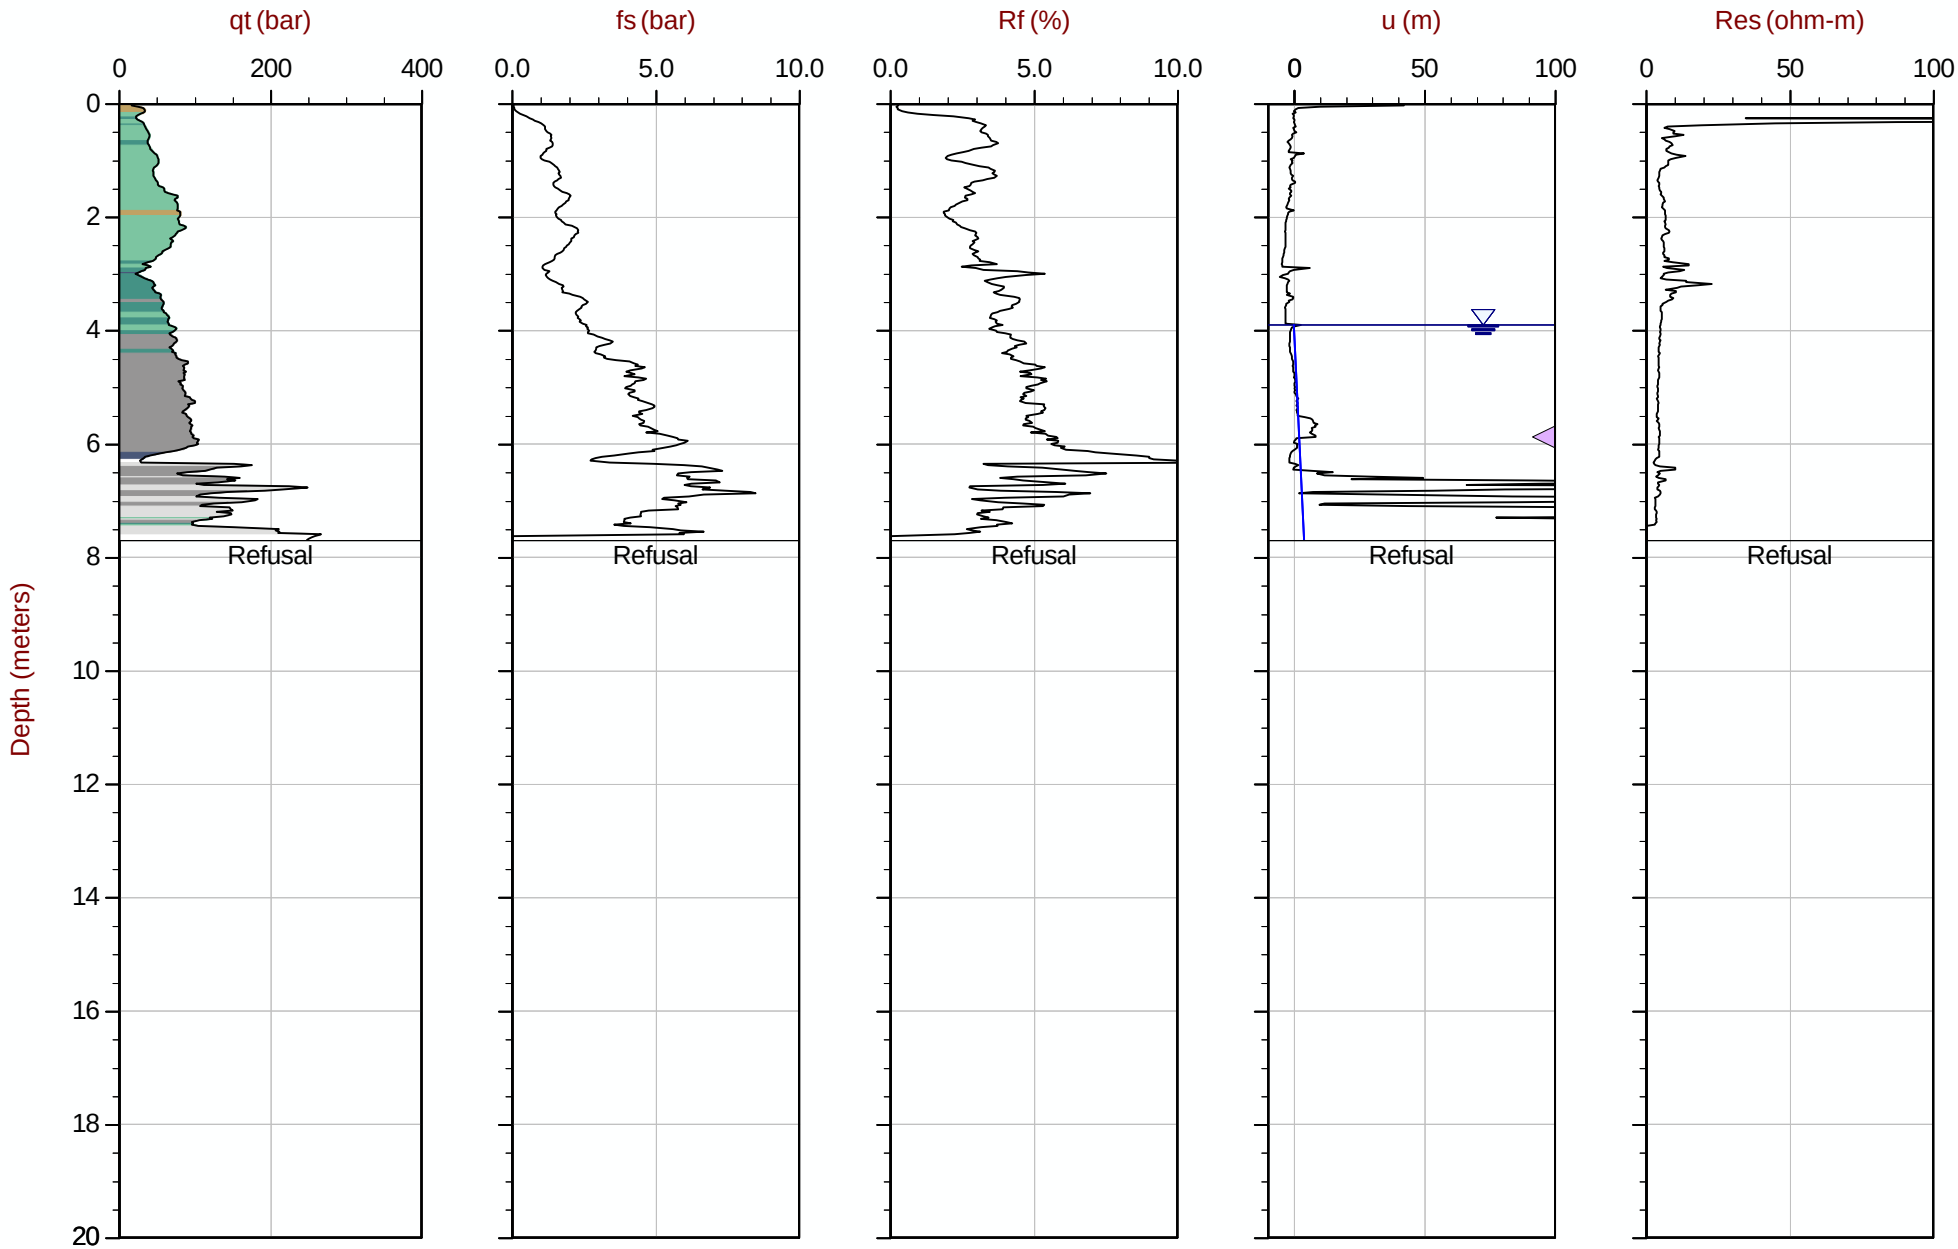

Max Depth: 7.700 m / 25.26 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT321.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609466m E: 415699m Elev: 773.420m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 11:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT322
Cone: 854:T1500F15U35 Area= 15cm2

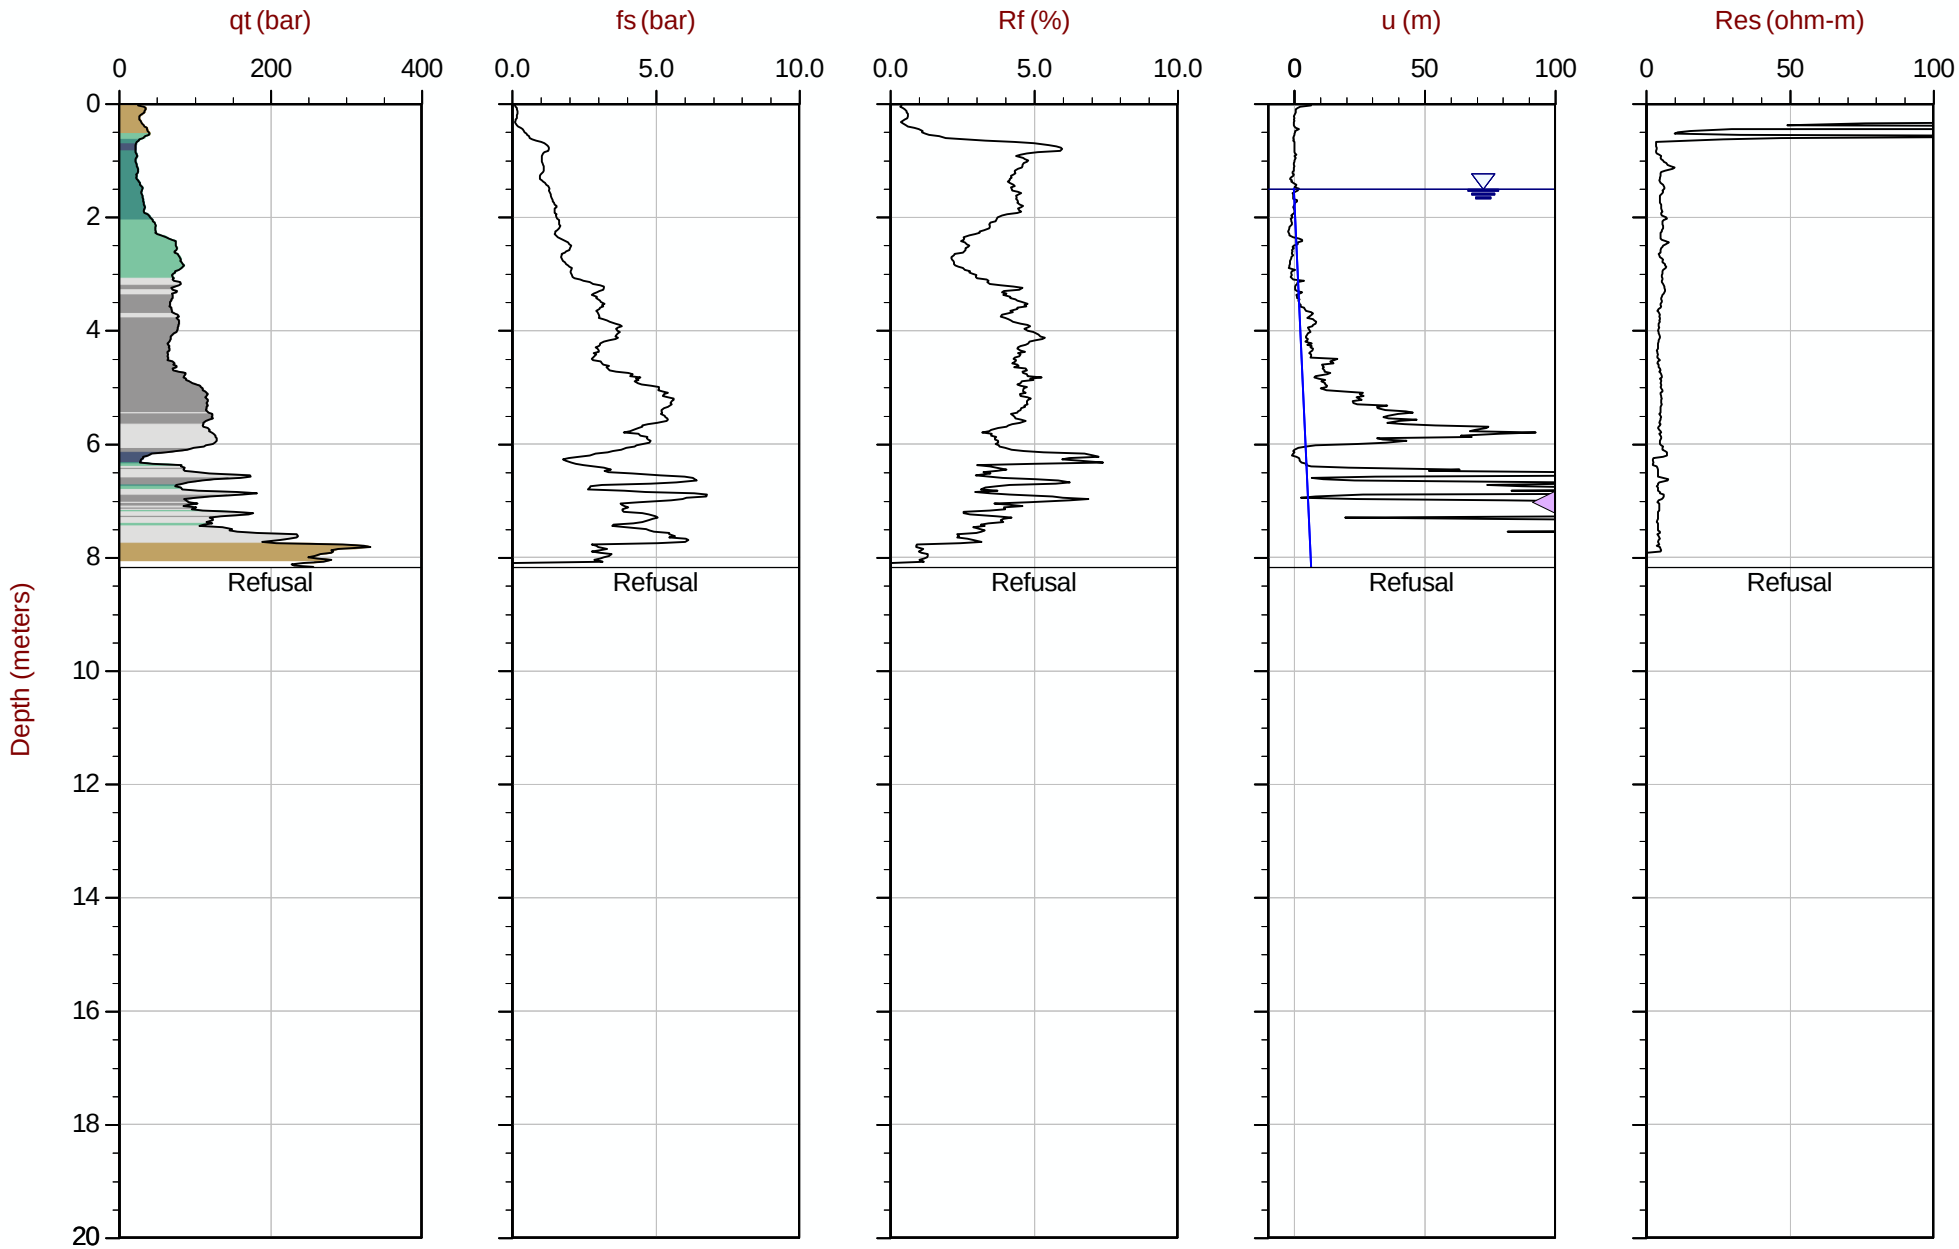

Max Depth: 8.175 m / 26.82 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT322.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609465m E: 415643m Elev: 773.799m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT323
Cone: 854:T1500F15U35 Area= 15cm2

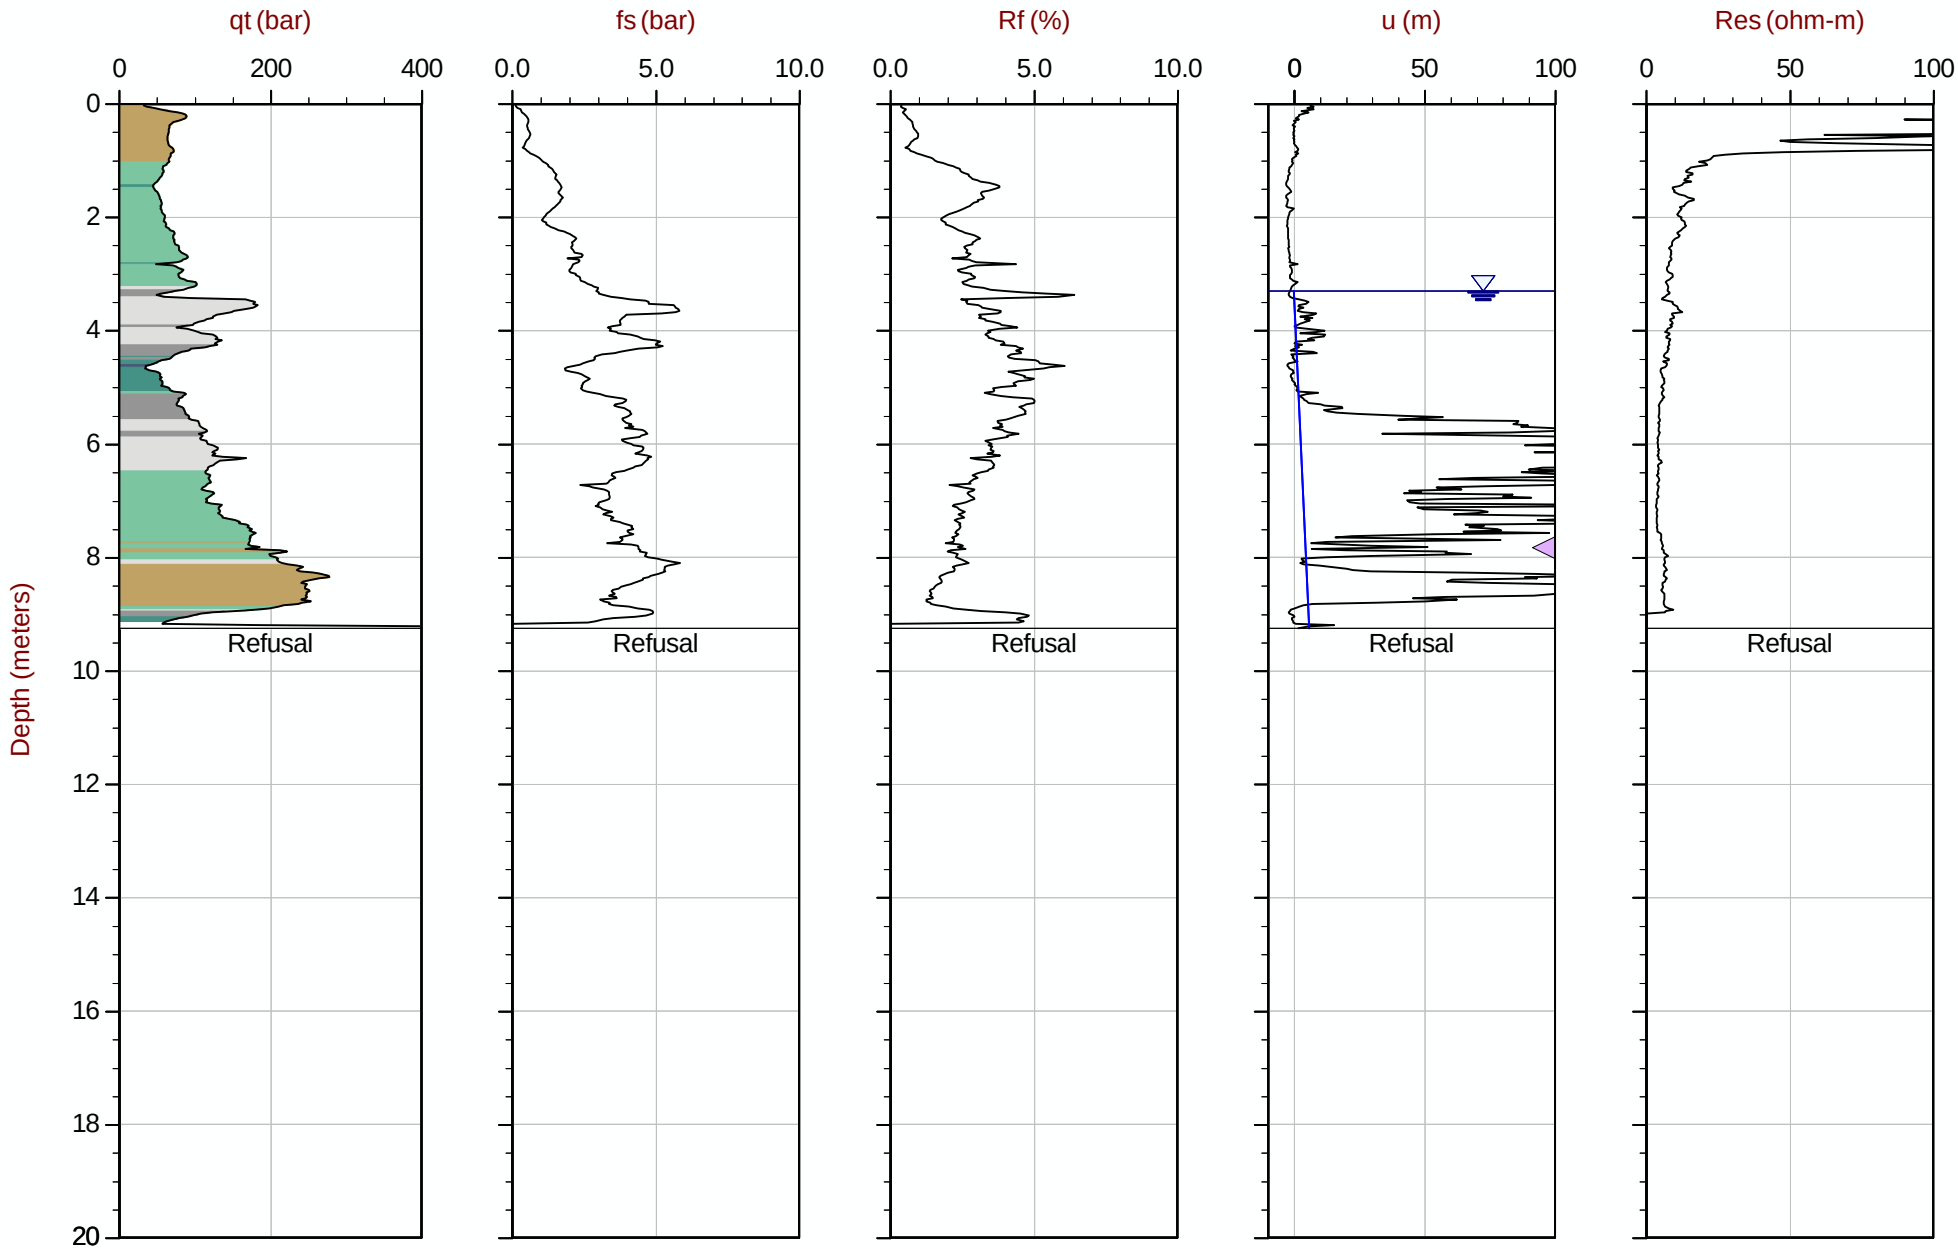

Max Depth: 9.250 m / 30.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT323.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609463m E: 415593m Elev: 774.098m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 13:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT324
Cone: 854:T1500F15U35 Area= 15cm2

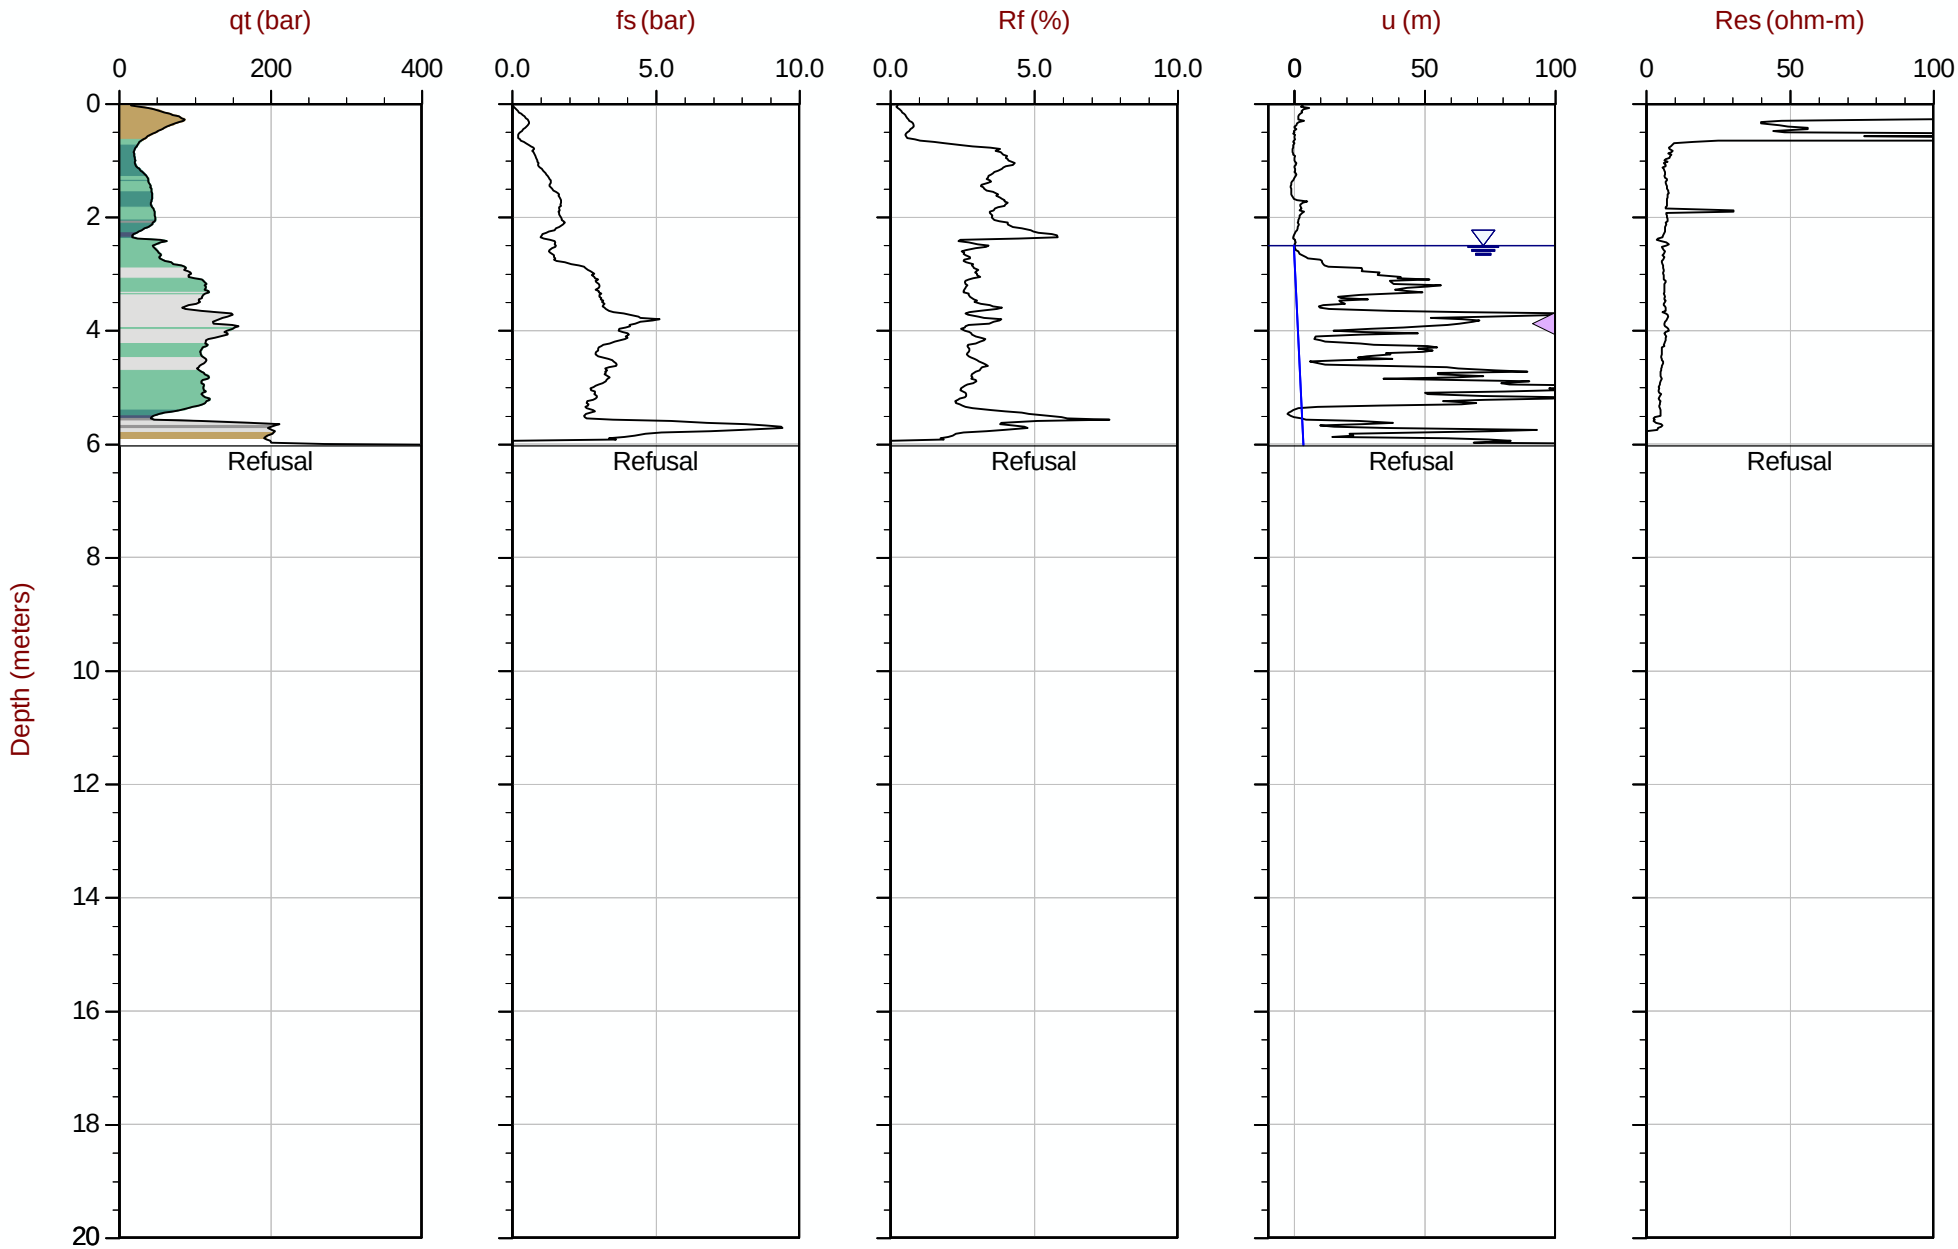

Max Depth: 6.025 m / 19.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT324.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609462m E: 415543m Elev: 773.957m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 16:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT325
Cone: 854:T1500F15U35 Area= 15cm2

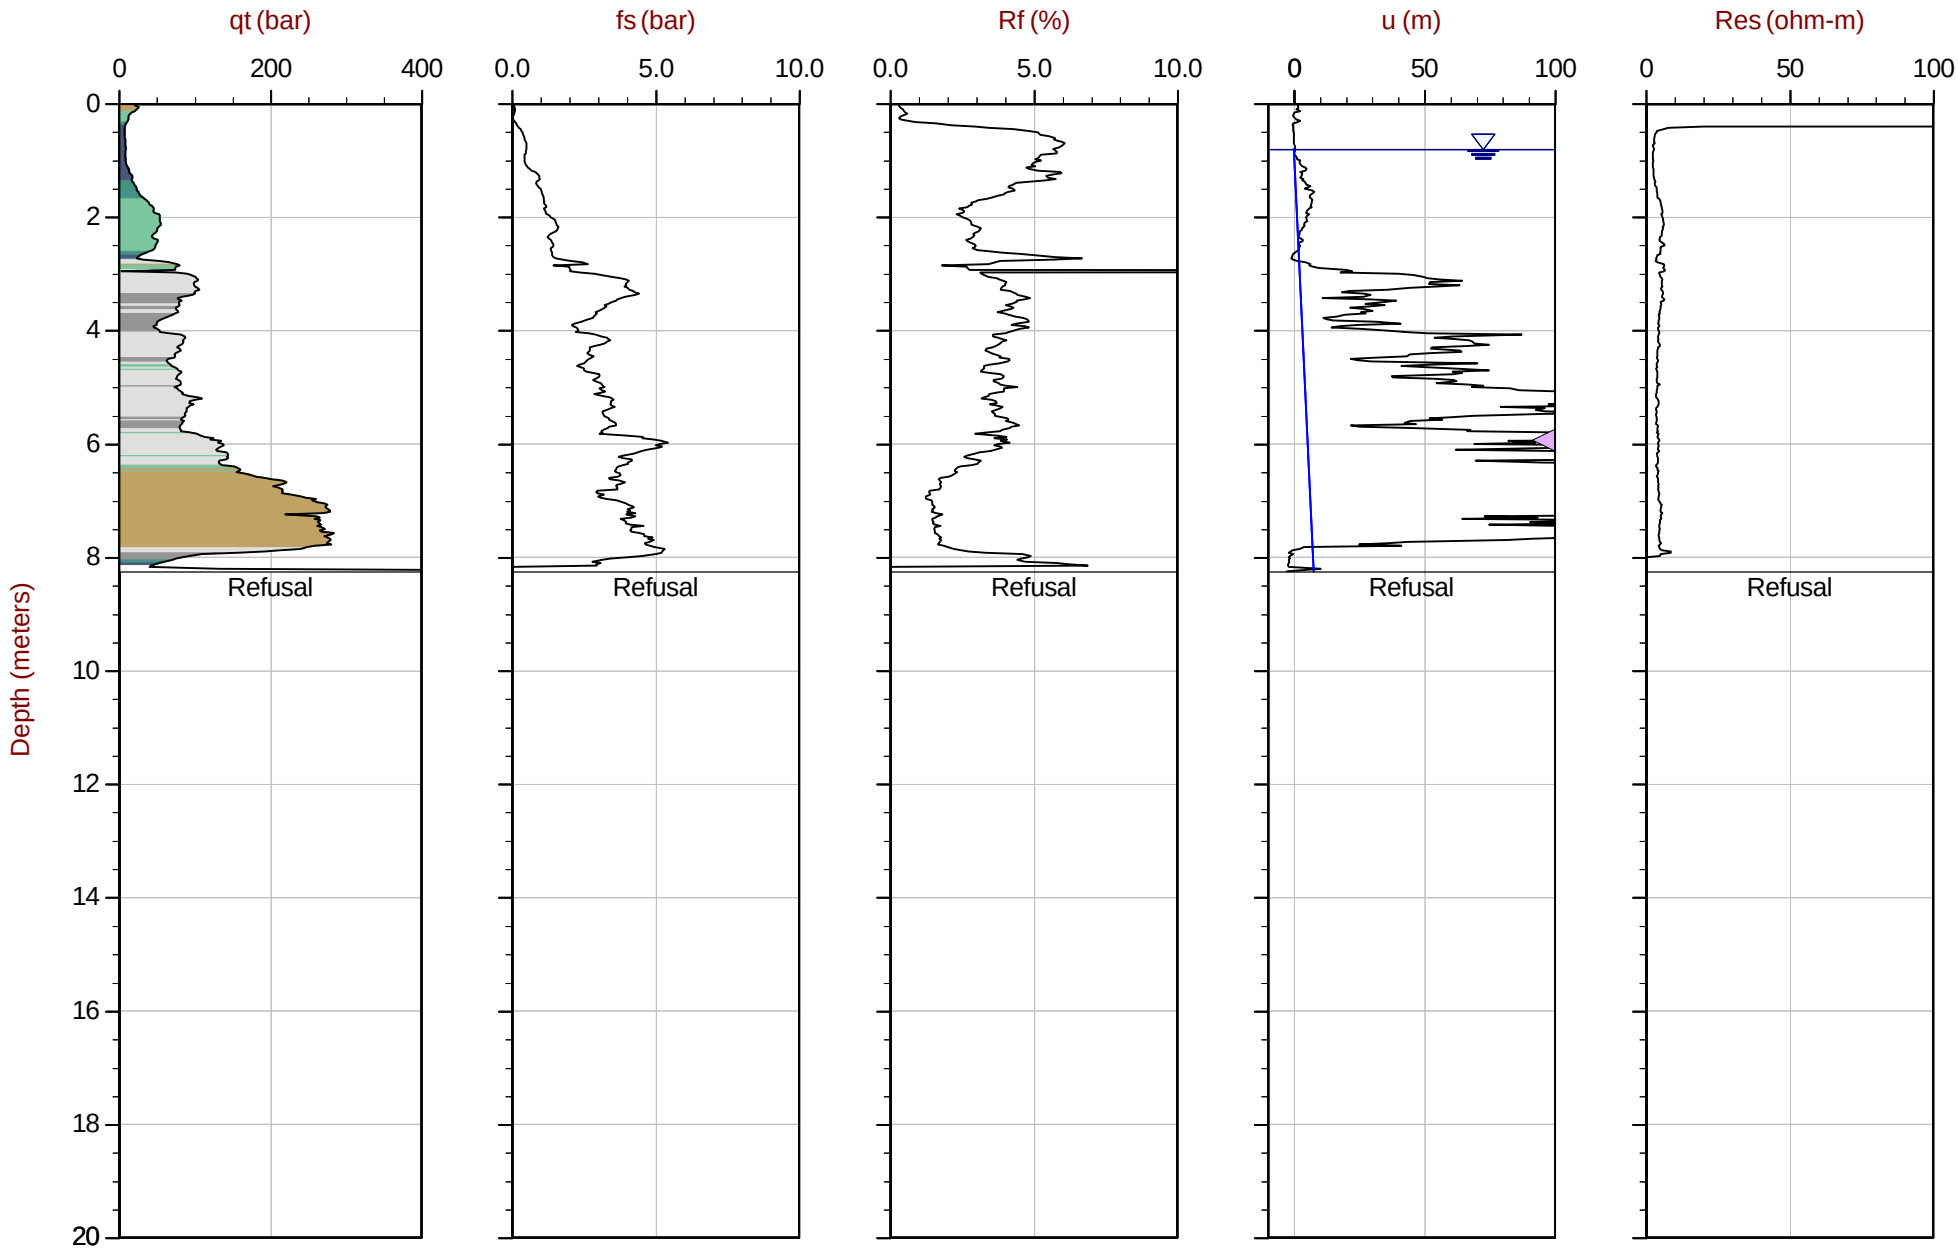

Max Depth: 8.250 m / 27.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT325.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609461m E: 415490m Elev: 774.165m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 07:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT326
Cone: 854:T1500F15U35 Area= 15cm2

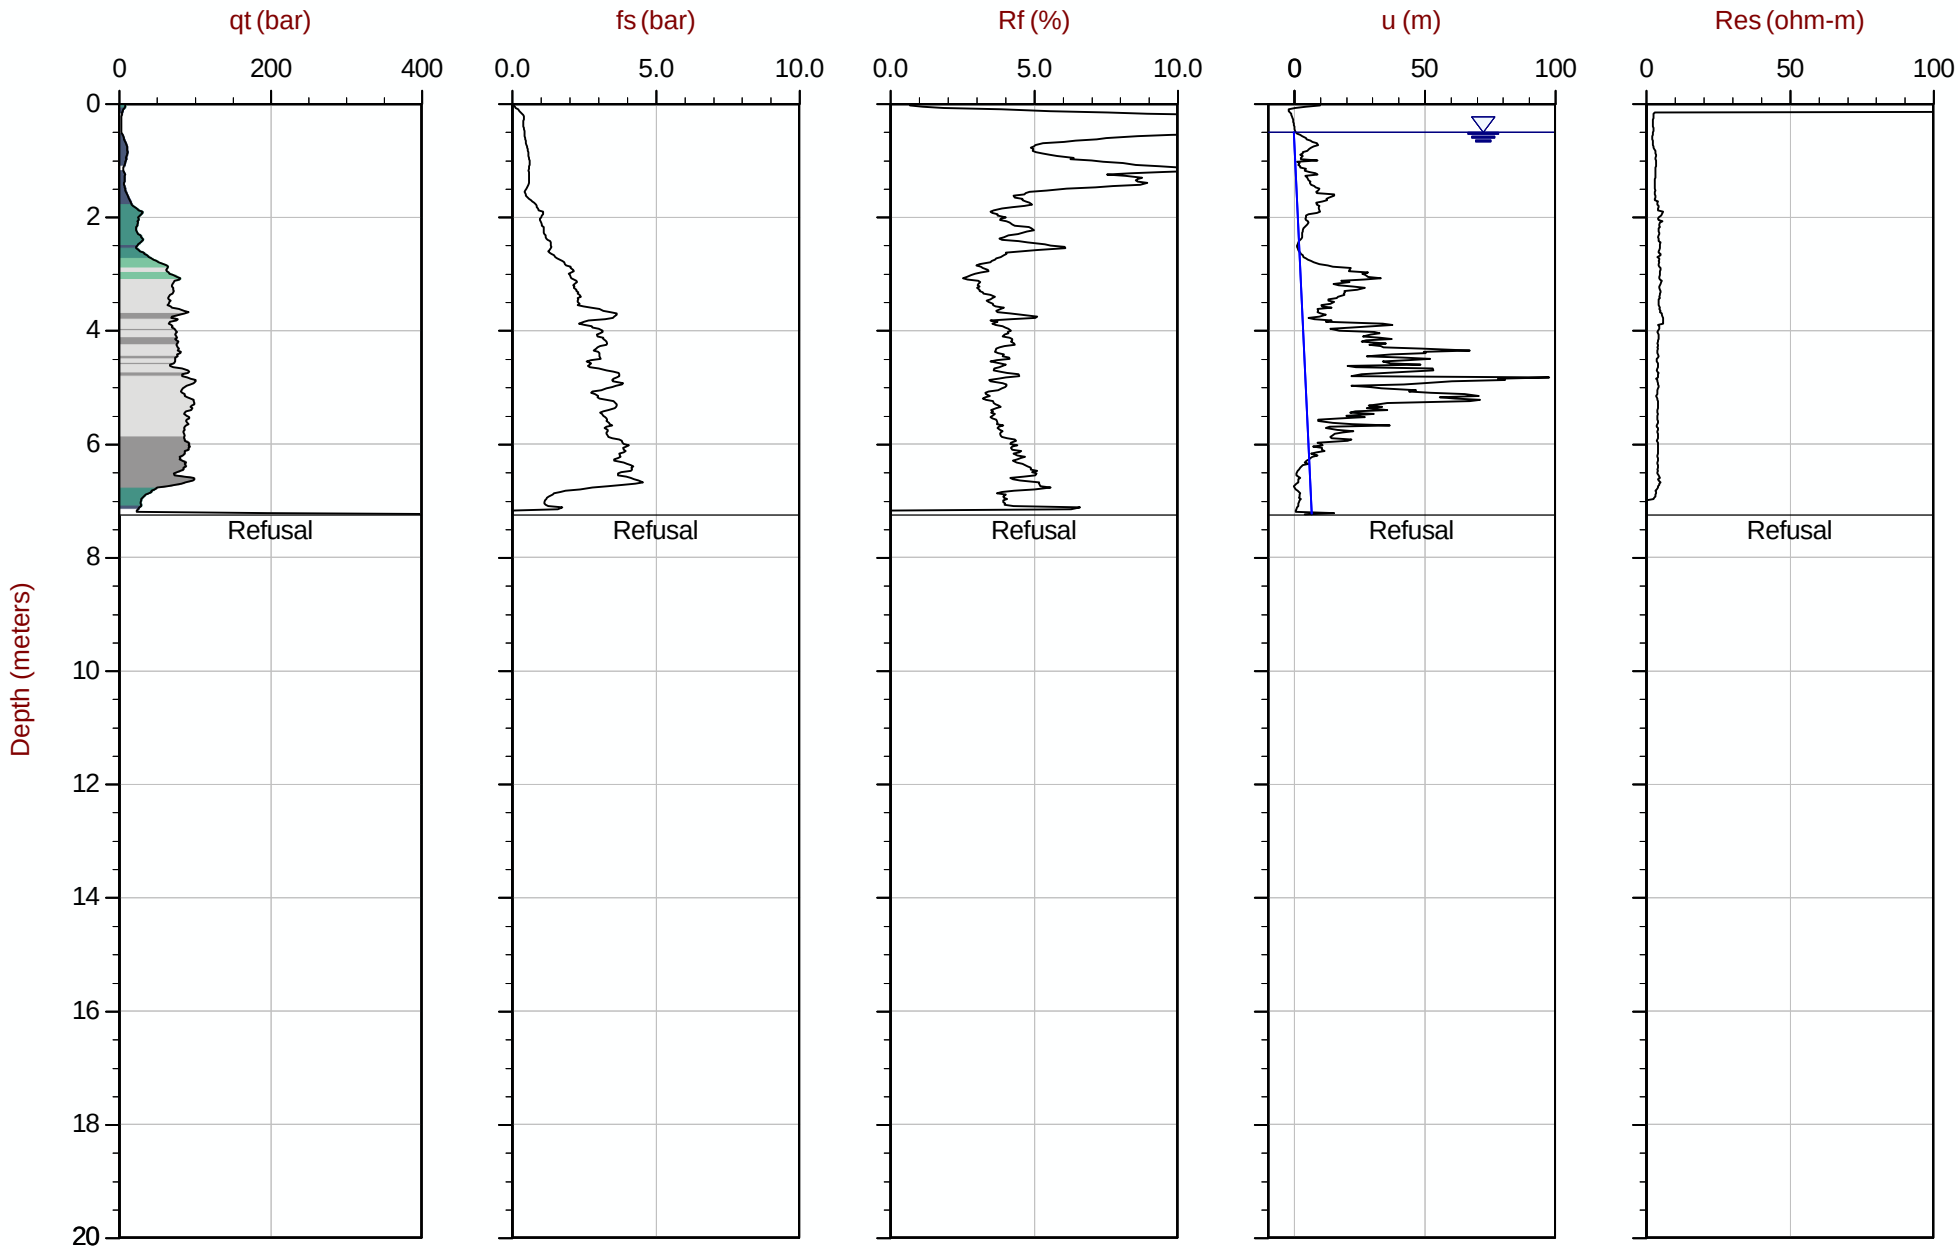

Max Depth: 7.250 m / 23.79 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT326.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609459m E: 415443m Elev: 773.975m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 09:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT327
Cone: 854:T1500F15U35 Area= 15cm2

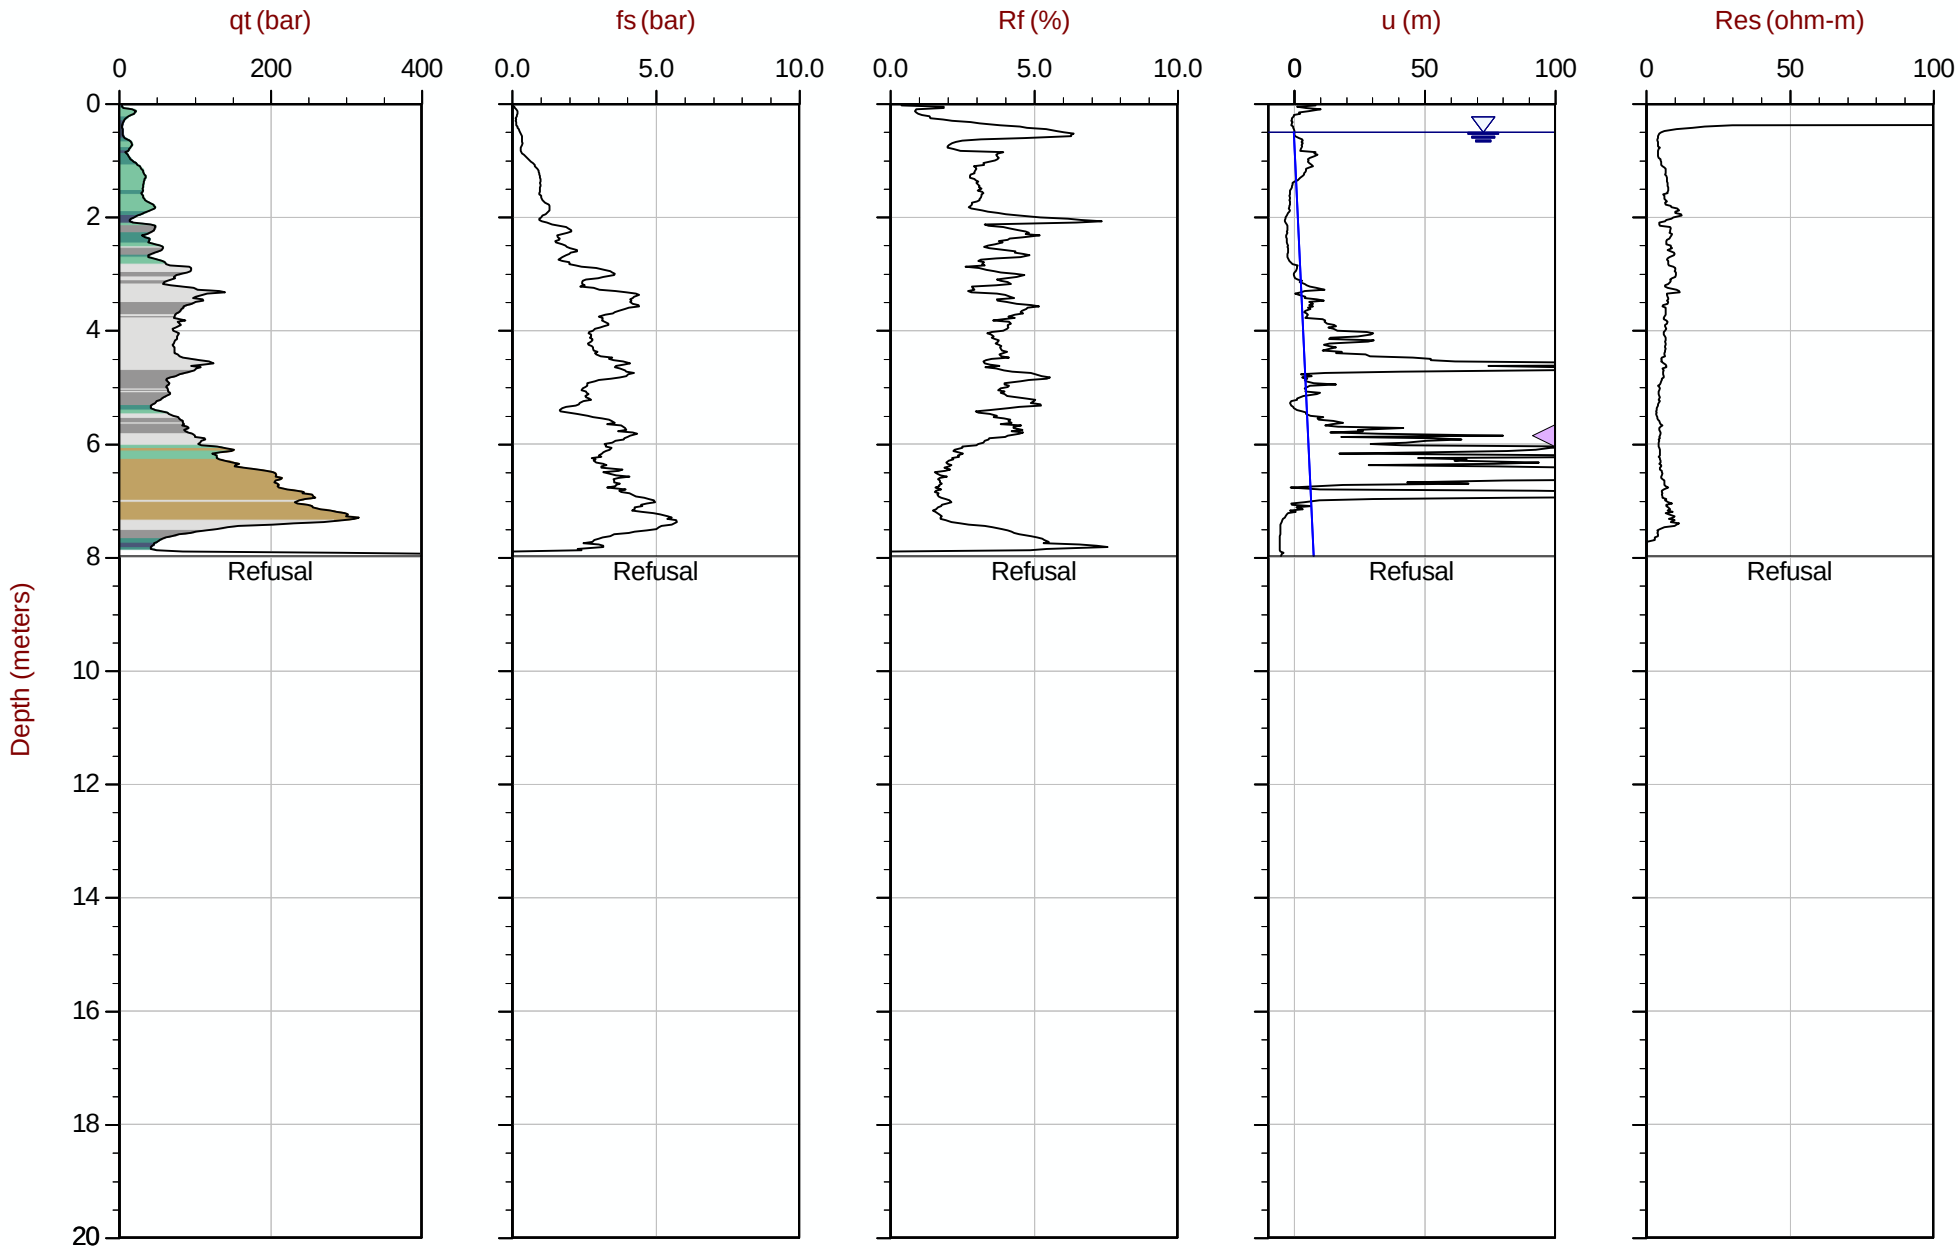

Max Depth: 7.975 m / 26.16 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT327.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609458m E: 415394m Elev: 774.321m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 10:28
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT328
Cone: 854:T1500F15U35 Area= 15cm2

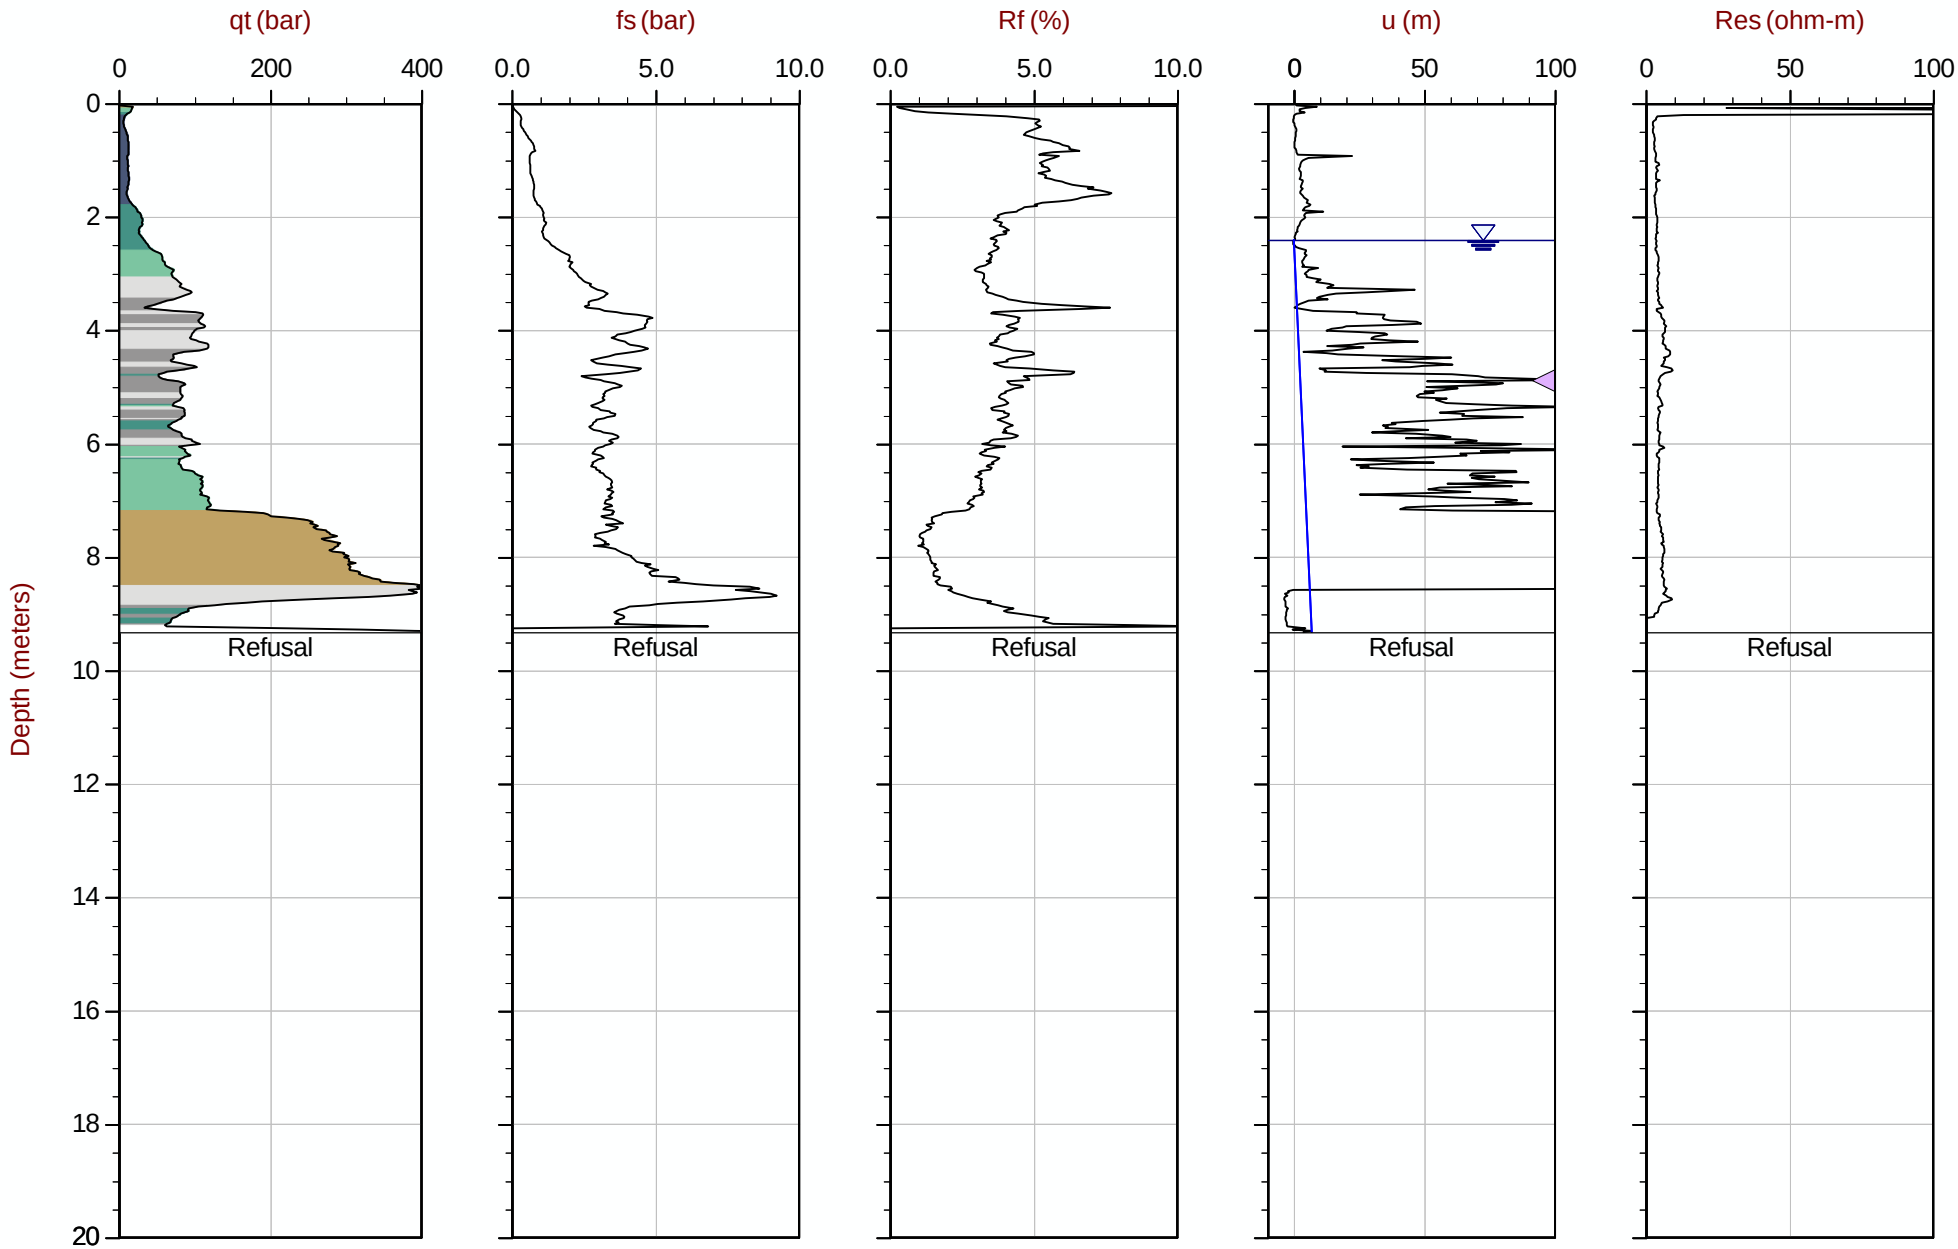

Max Depth: 9.325 m / 30.59 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT328.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609457m E: 415343m Elev: 774.726m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 12:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT329
Cone: 854:T1500F15U35 Area= 15cm2

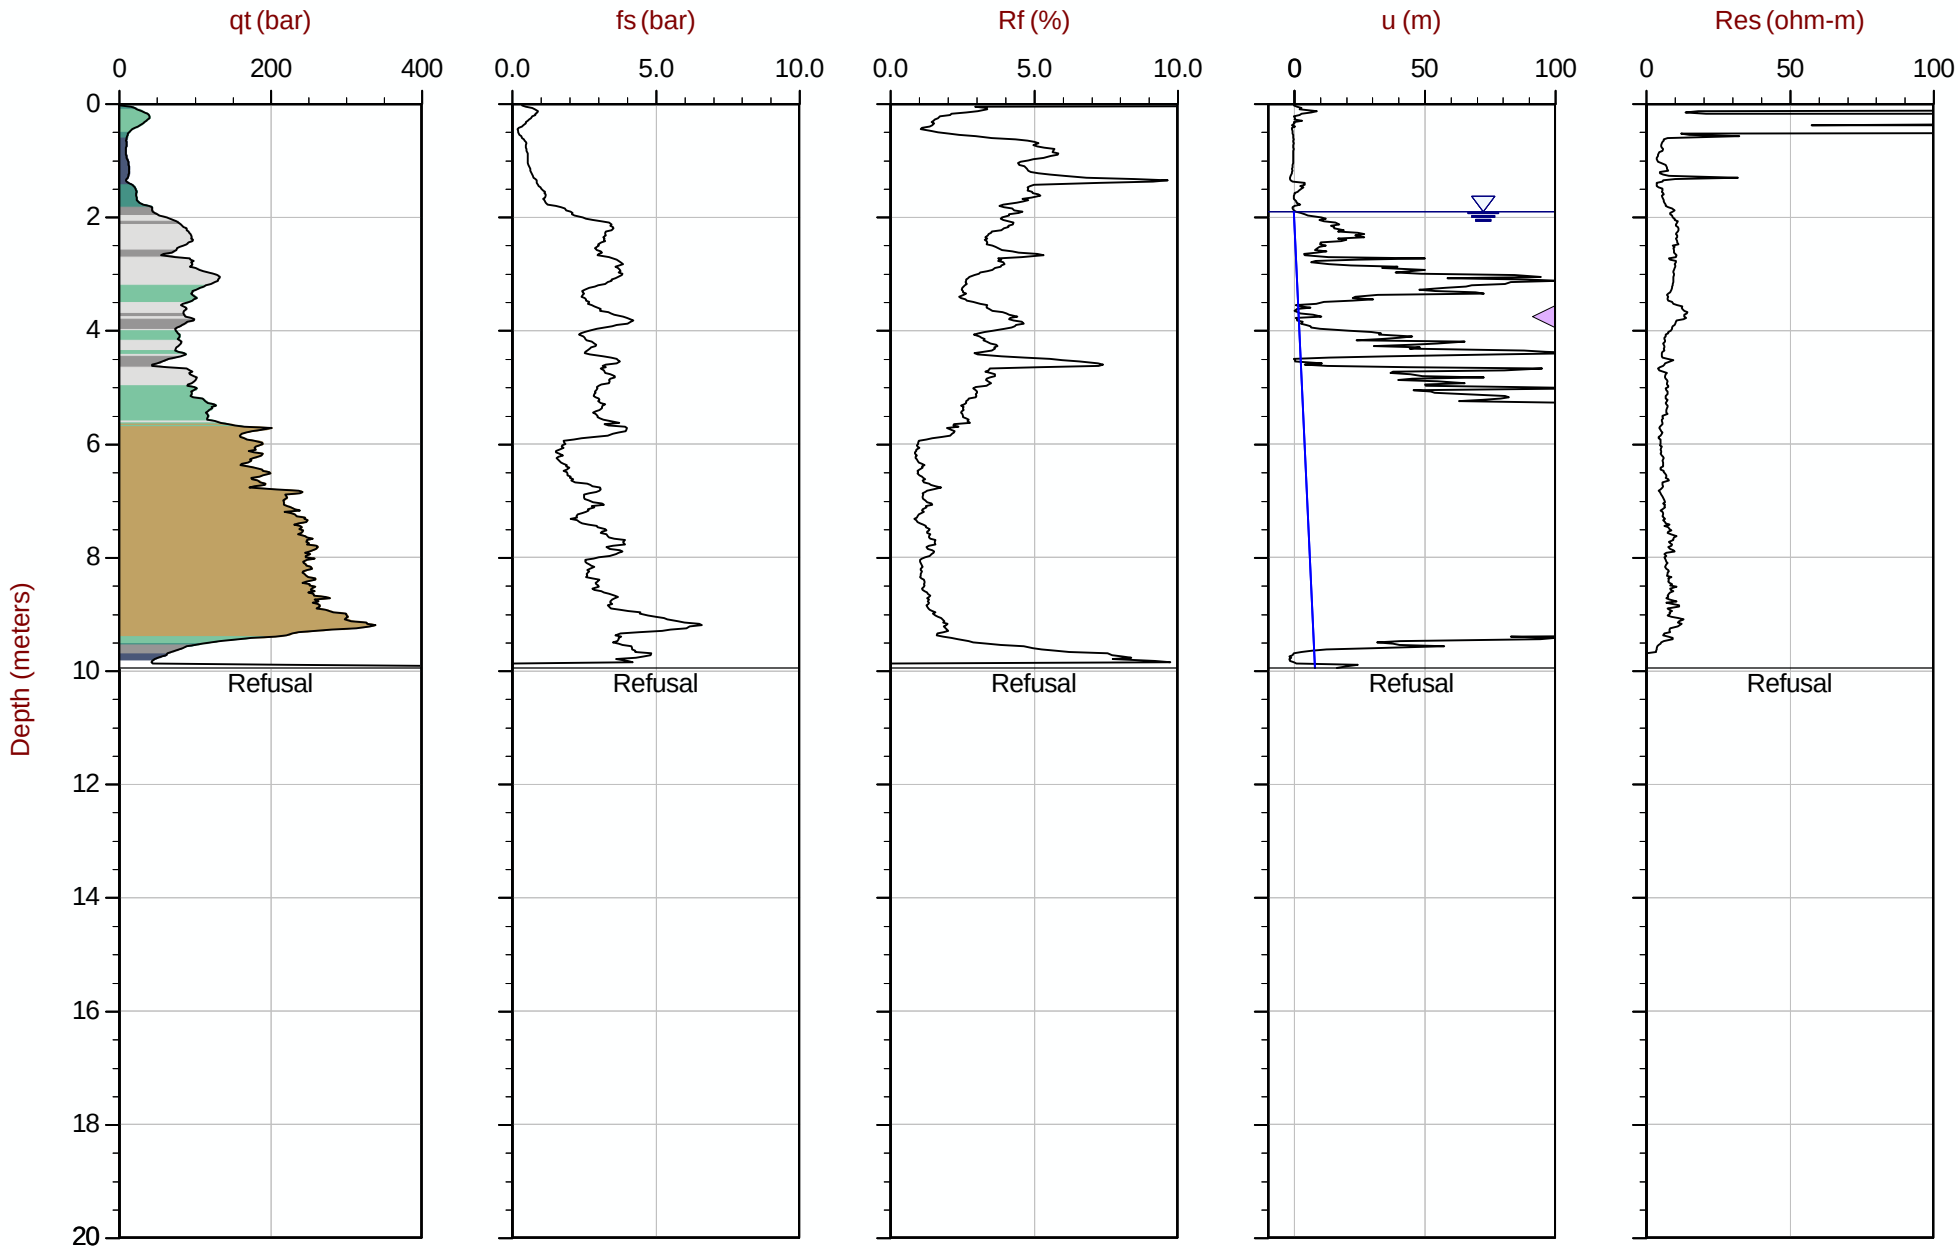

Max Depth: 9.950 m / 32.64 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT329.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609456m E: 415294m Elev: 775.162m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 14:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT330
Cone: 854:T1500F15U35 Area= 15cm2

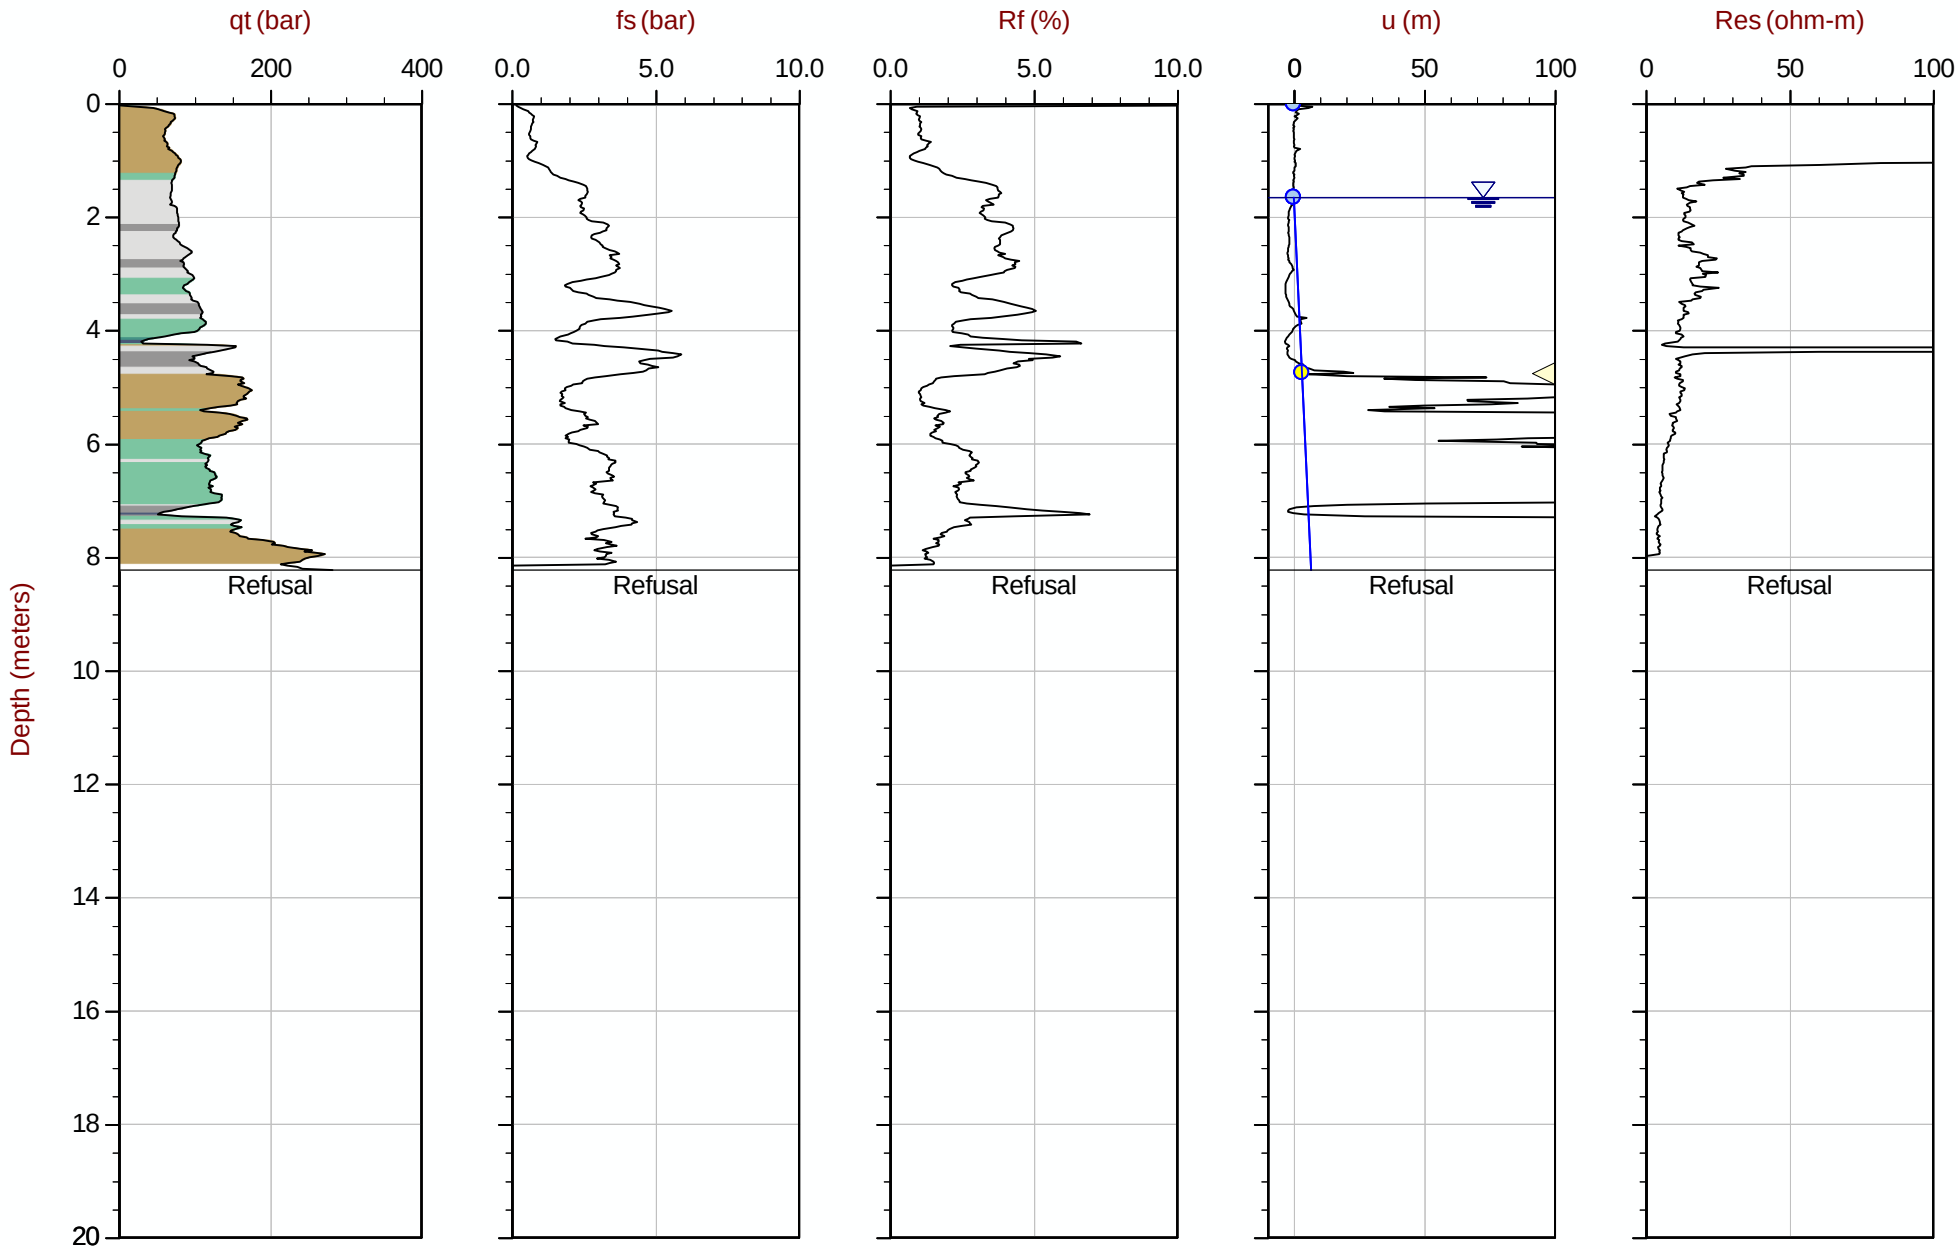

Max Depth: 8.225 m / 26.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT330.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609456m E: 415240m Elev: 776.805m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 16:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT331
Cone: 854:T1500F15U35 Area= 15cm2

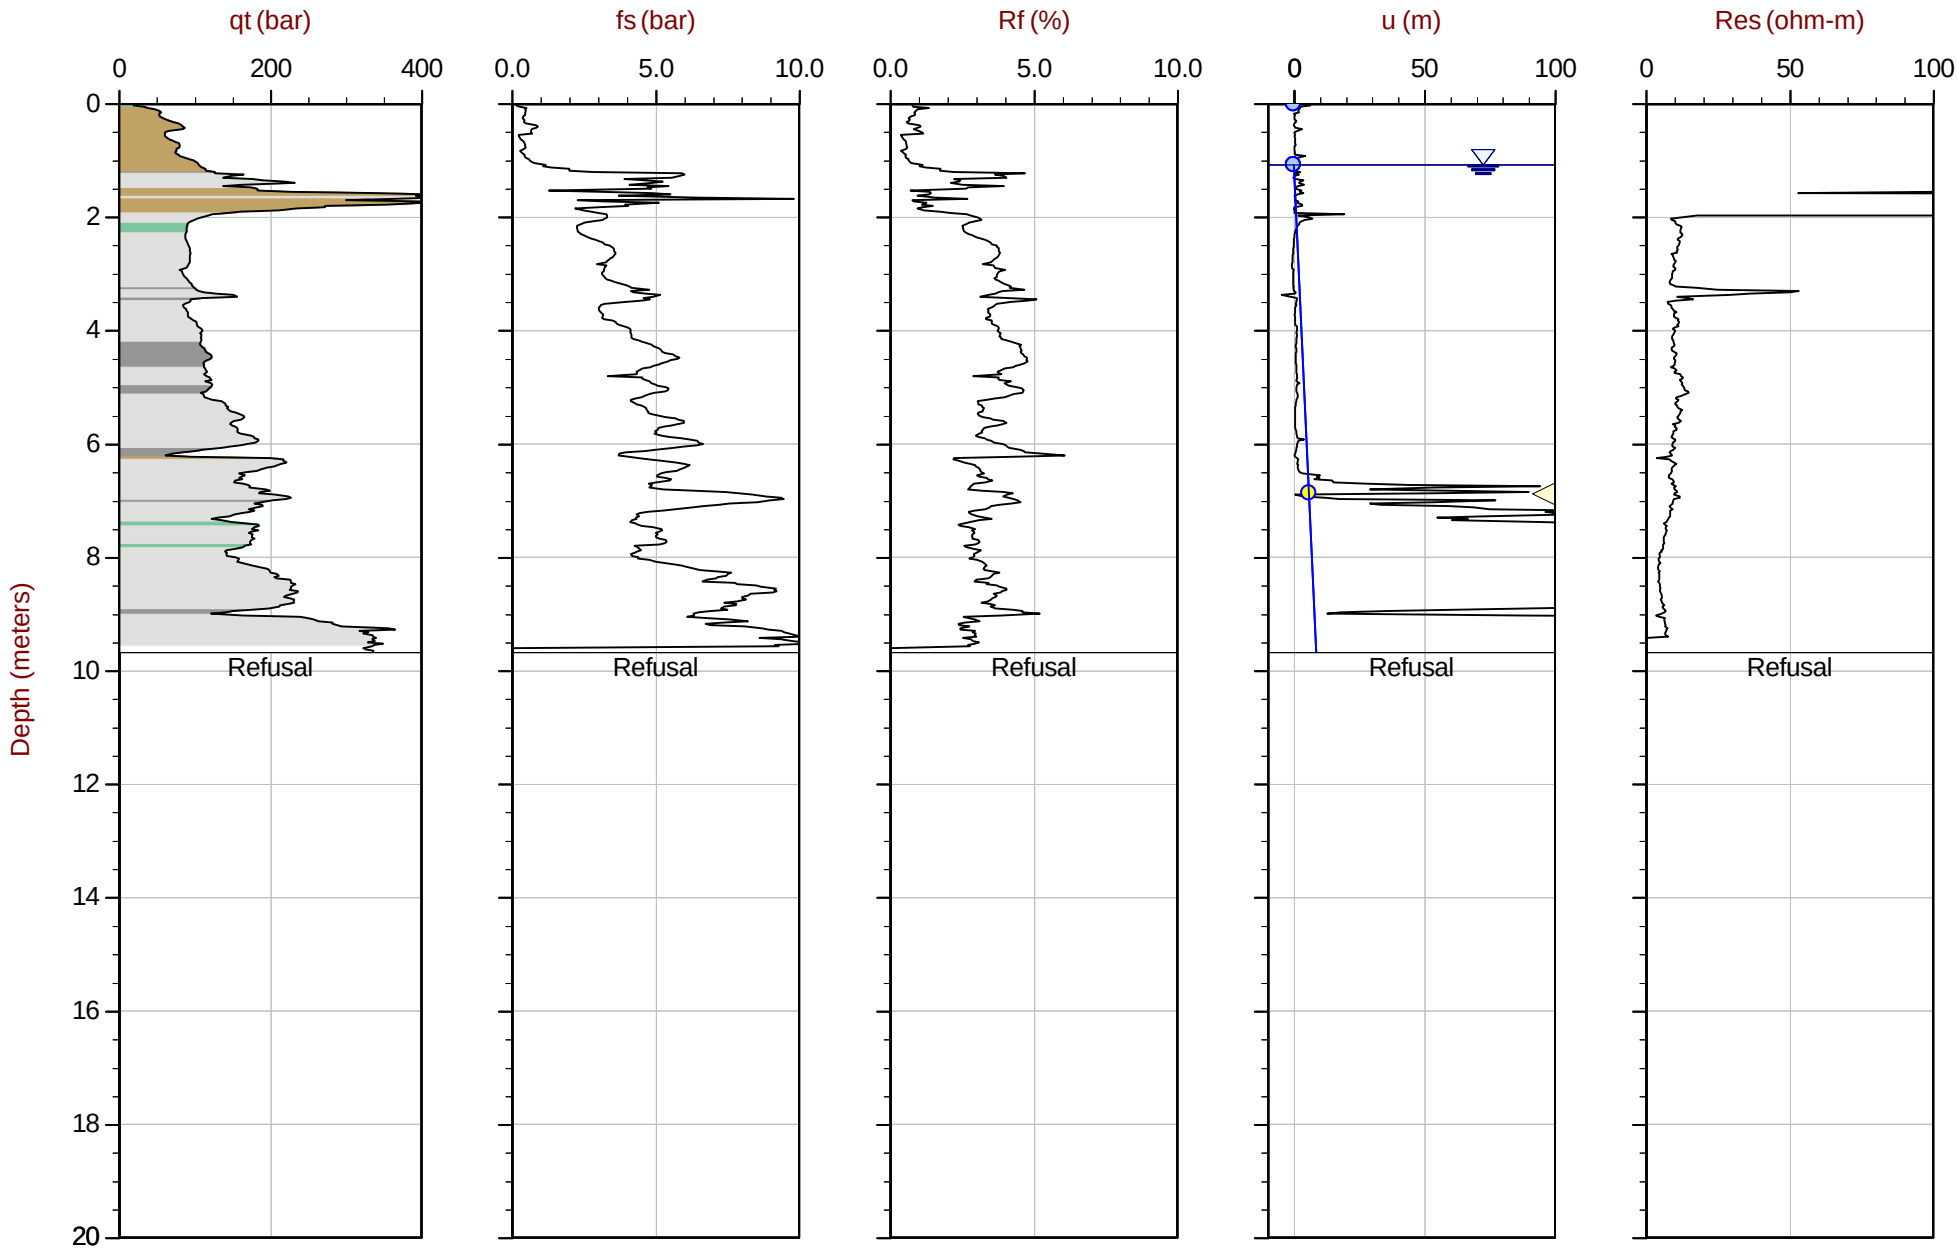

Max Depth: 9.675 m / 31.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT331.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609455m E: 415194m Elev: 778.712m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 07:02
Site: Brooks, Alberta

Sounding: RCPT22-22CPT332
Cone: 854:T1500F15U35 Area= 15cm2

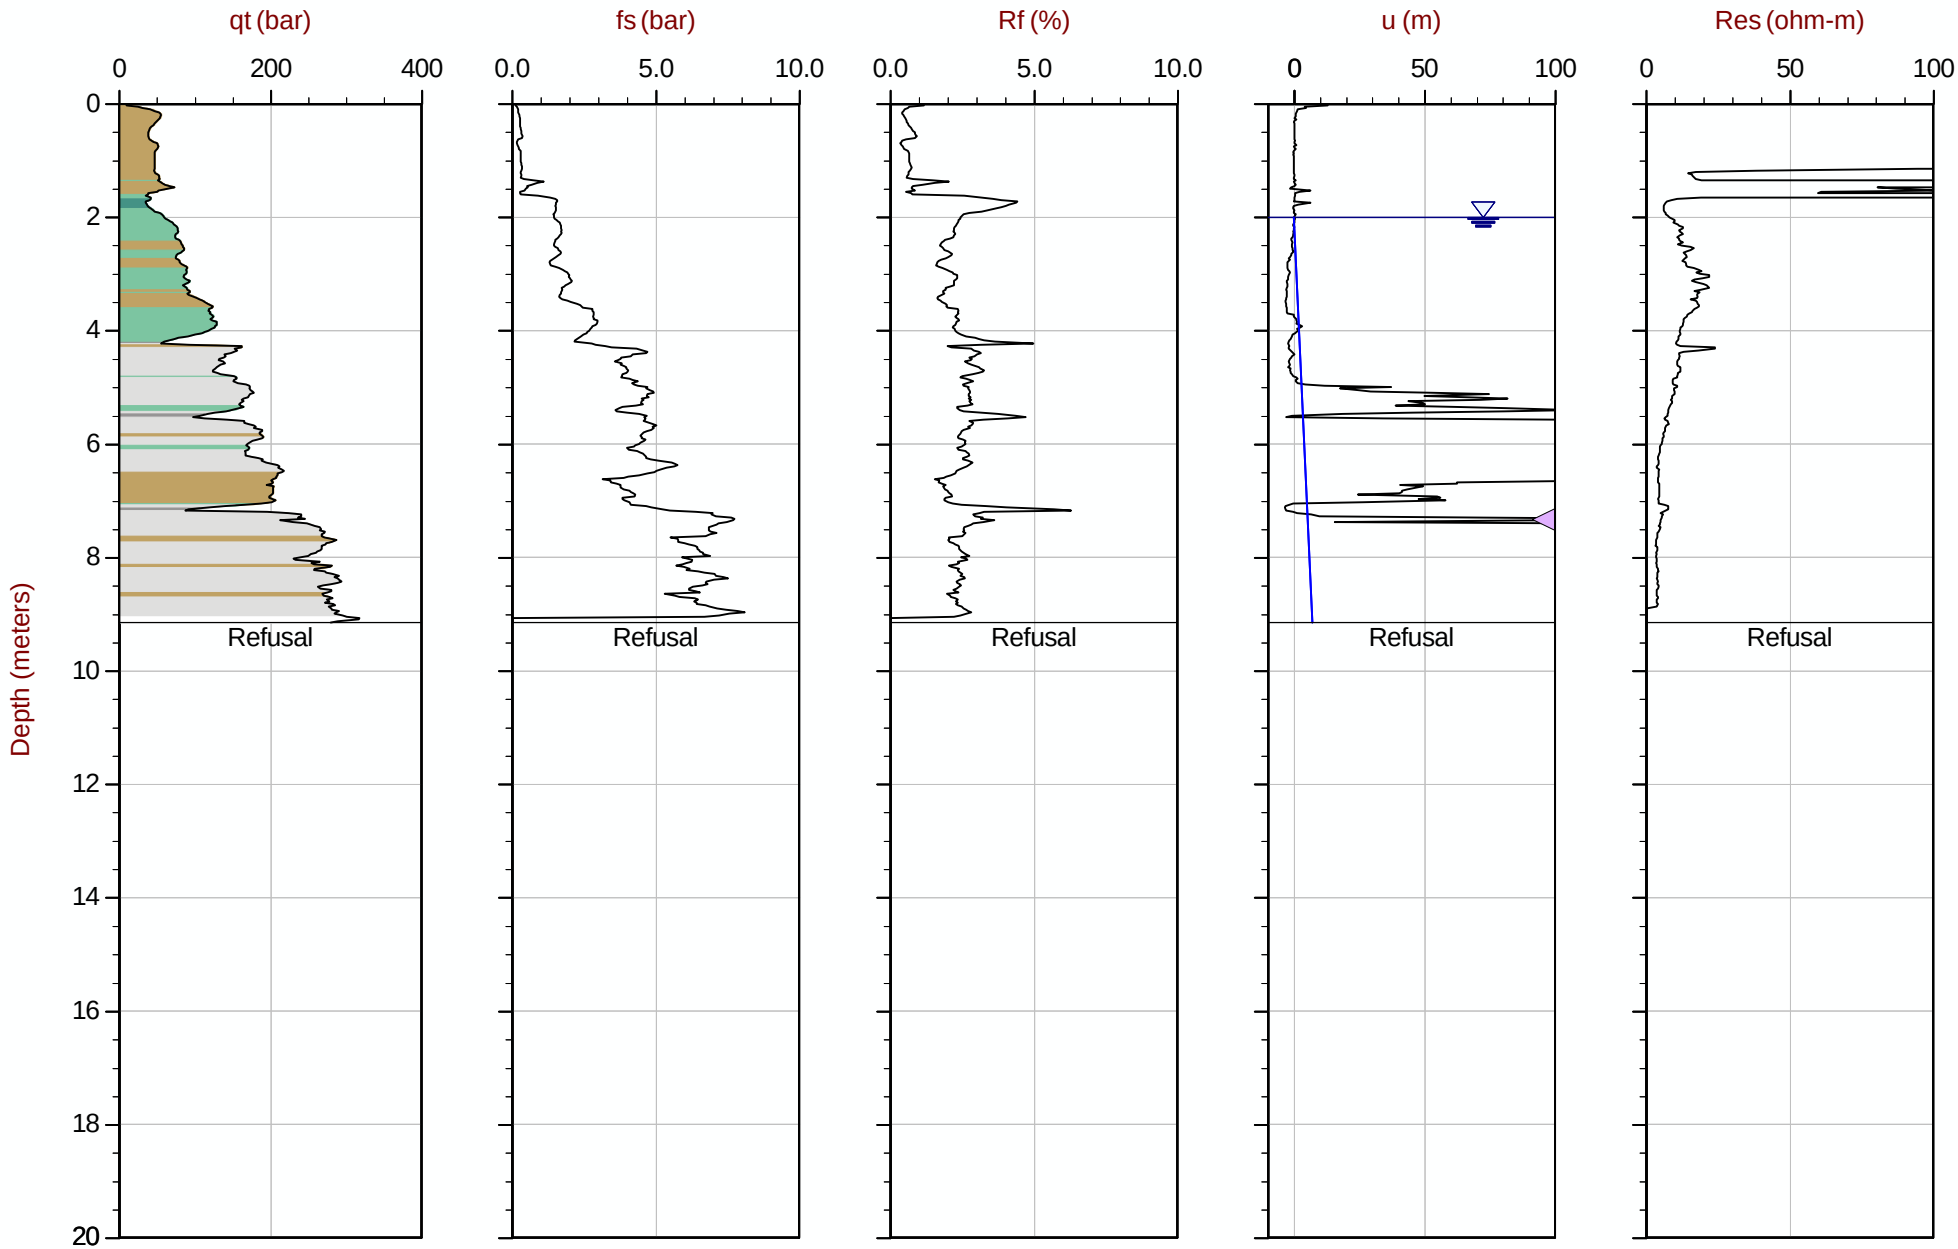

Max Depth: 9.150 m / 30.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT332.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609455m E: 415143m Elev: 777.240m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 08:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT333
Cone: 854:T1500F15U35 Area= 15cm2

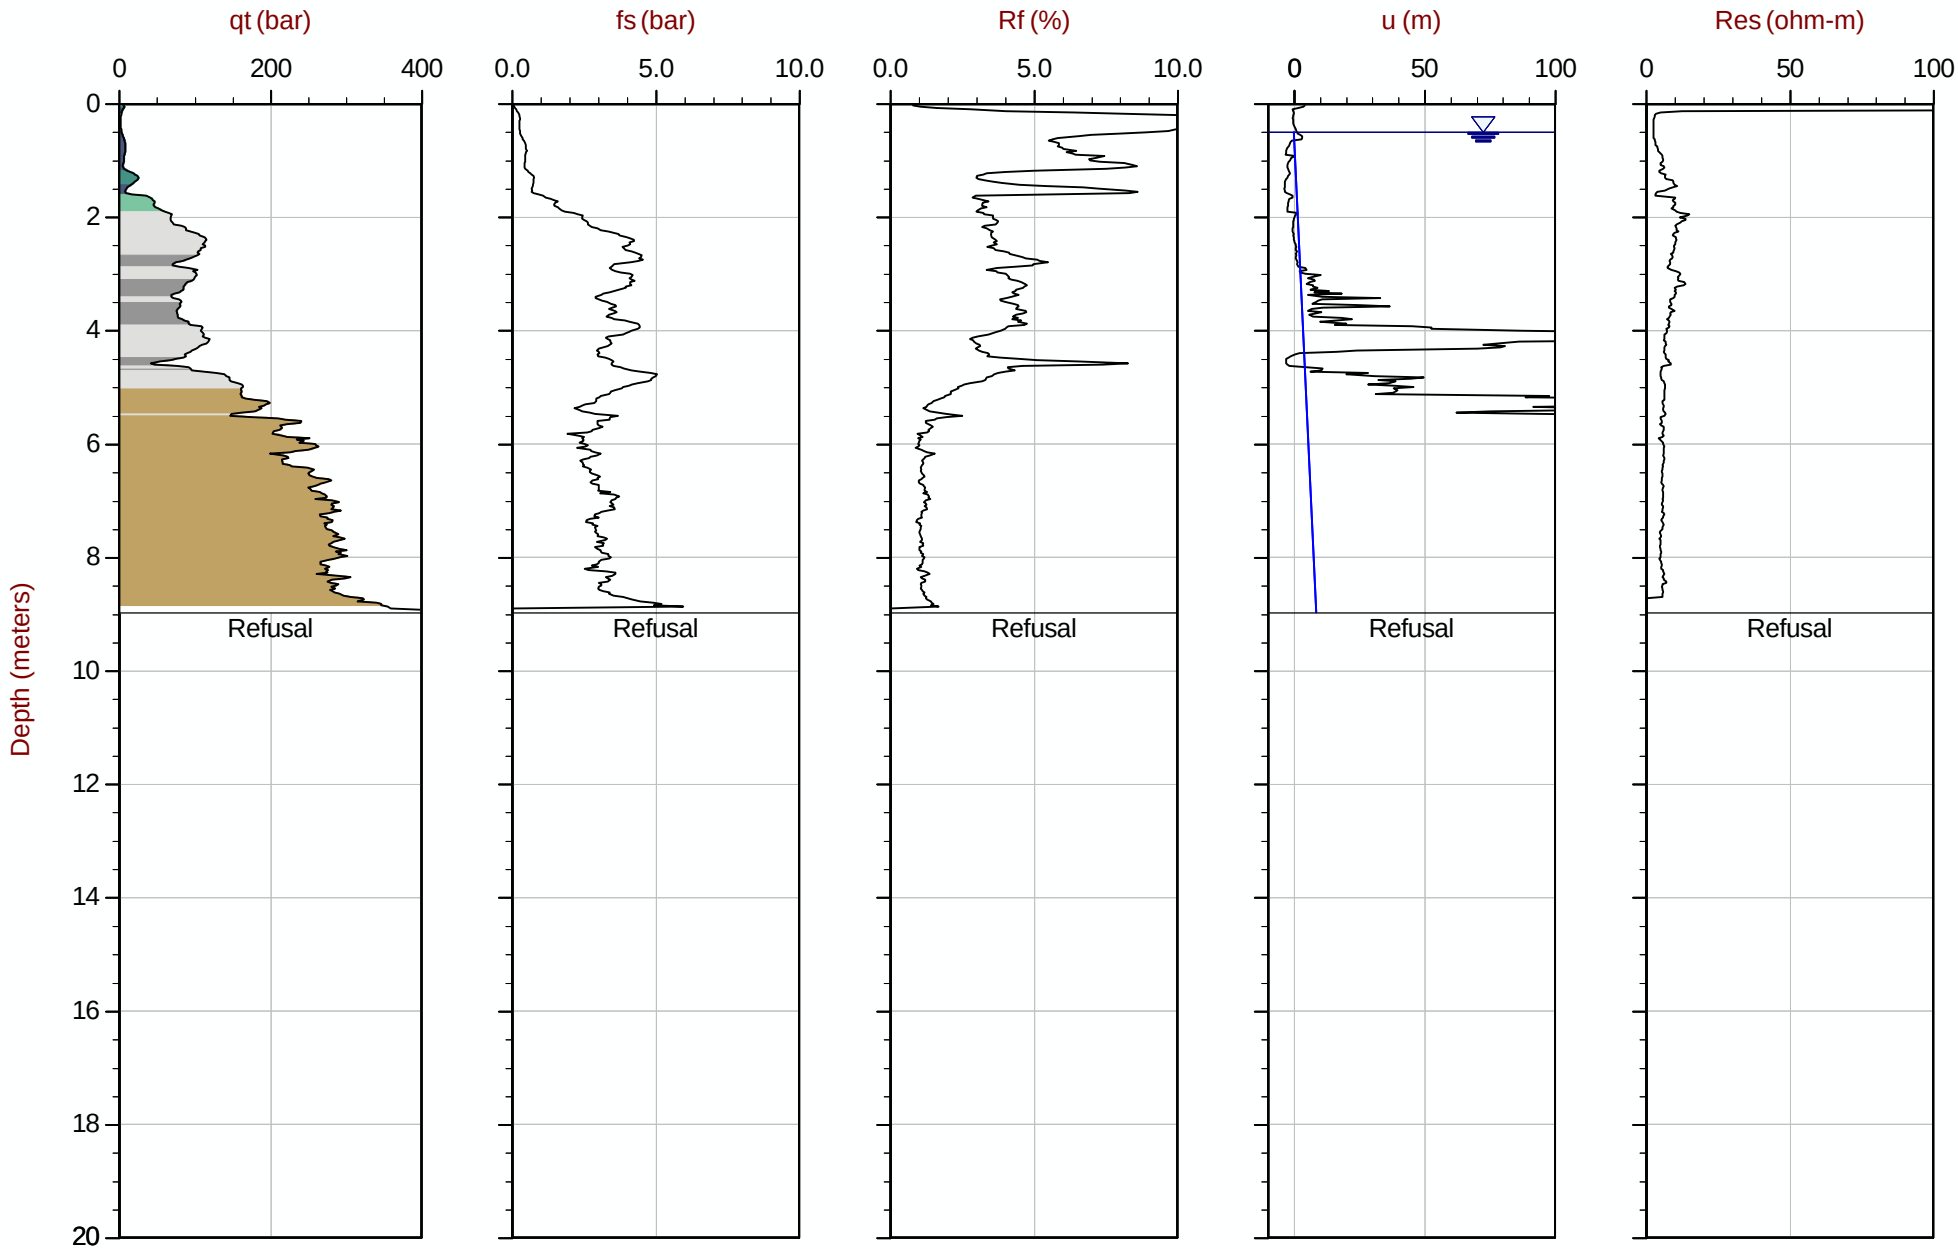

Max Depth: 8.975 m / 29.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT333.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609454m E: 415094m Elev: 775.049m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 10:10
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT334
Cone: 750:T1500F15U35 Area= 15cm2

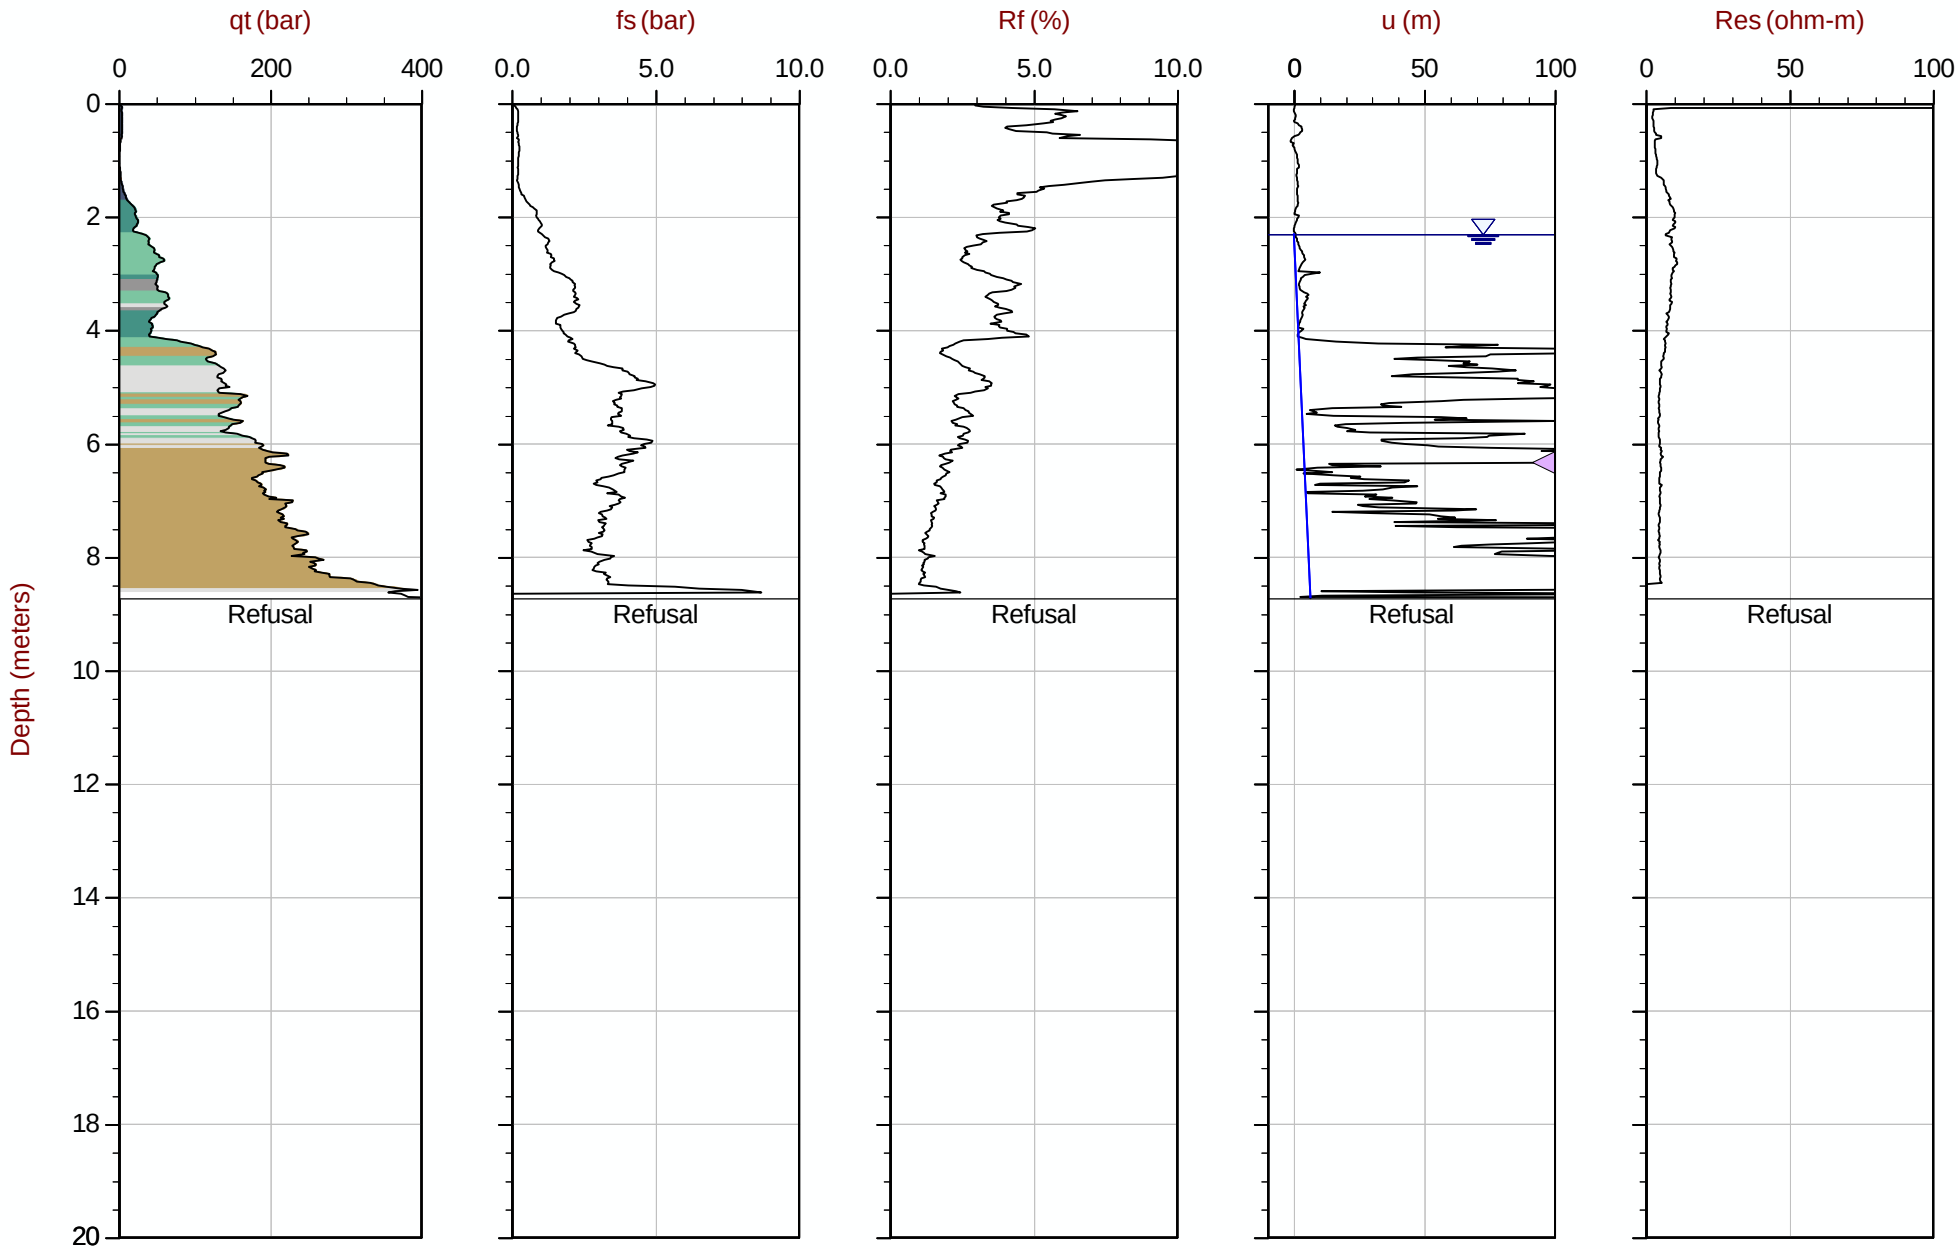

Max Depth: 8.725 m / 28.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT334.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609454m E: 415043m Elev: 774.769m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT335
Cone: 750:T1500F15U35 Area= 15cm2

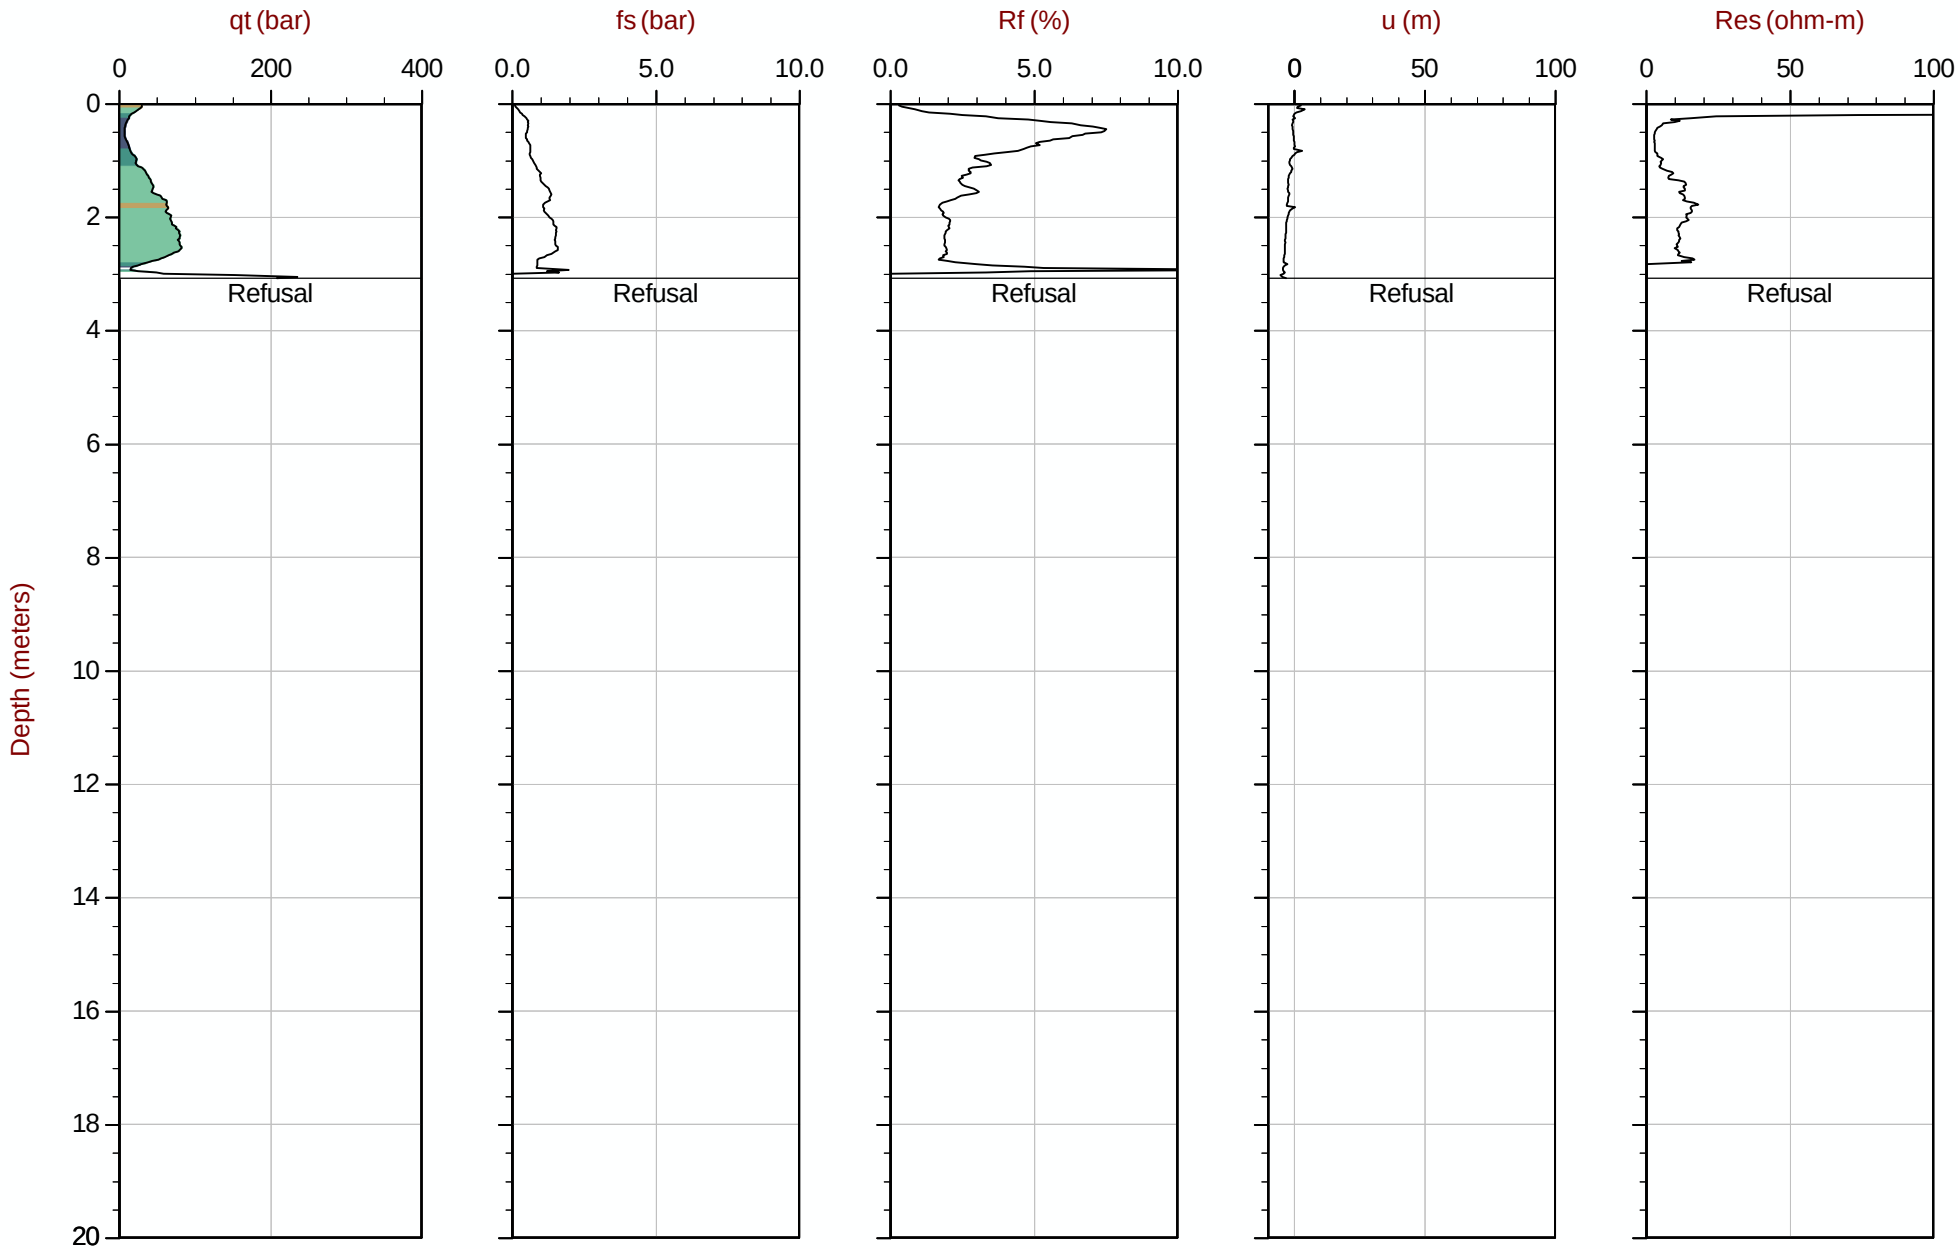

Max Depth: 3.075 m / 10.09 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT335.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 414993m Elev: 776.343m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 13:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT335B
Cone: 821:T1000F10U35 Area= 15cm2

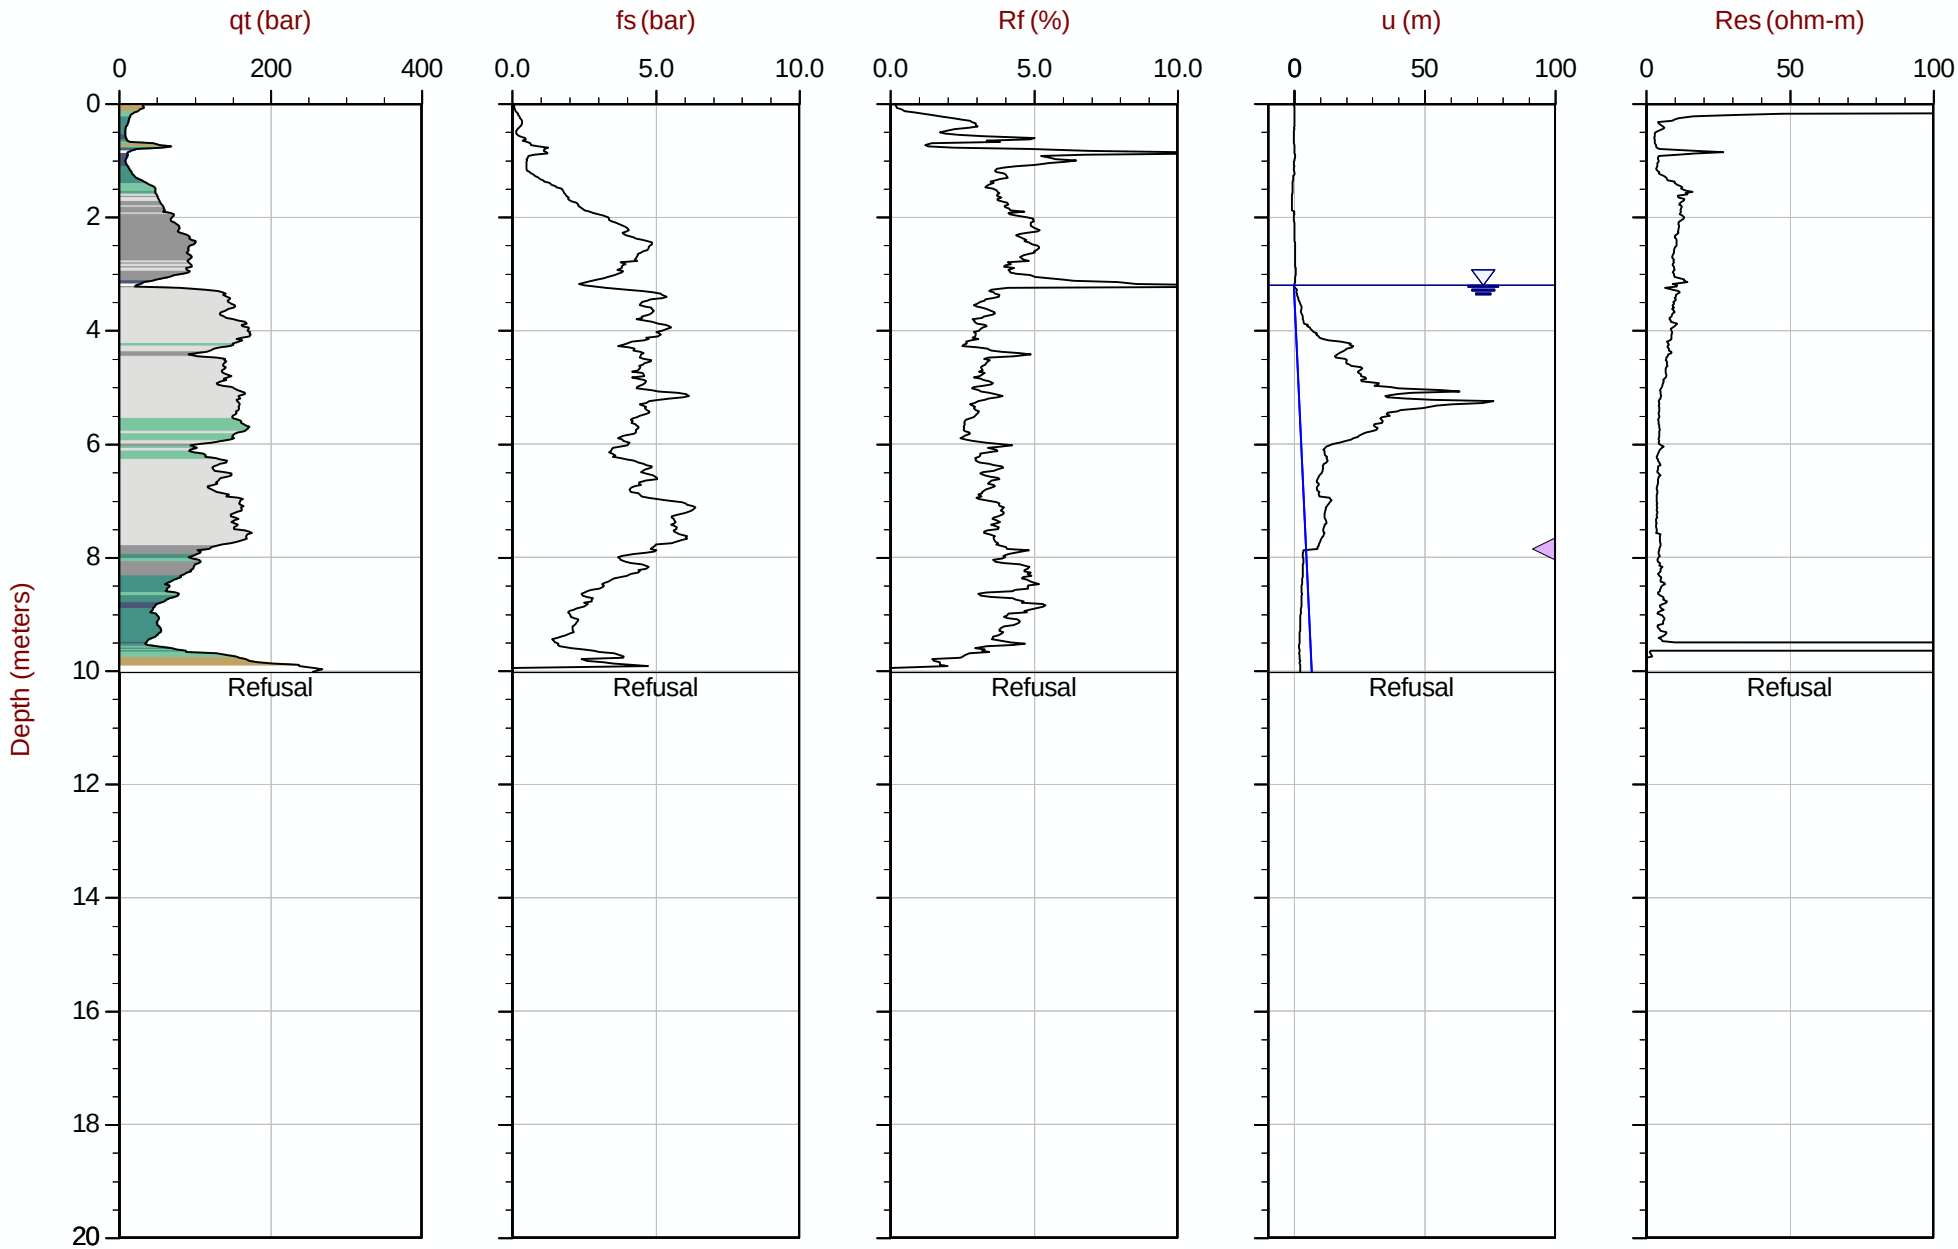

Max Depth: 10.025 m / 32.89 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT335B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 414990m Elev: 776.300m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 14:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT336
Cone: 821:T1000F10U35 Area= 15cm2

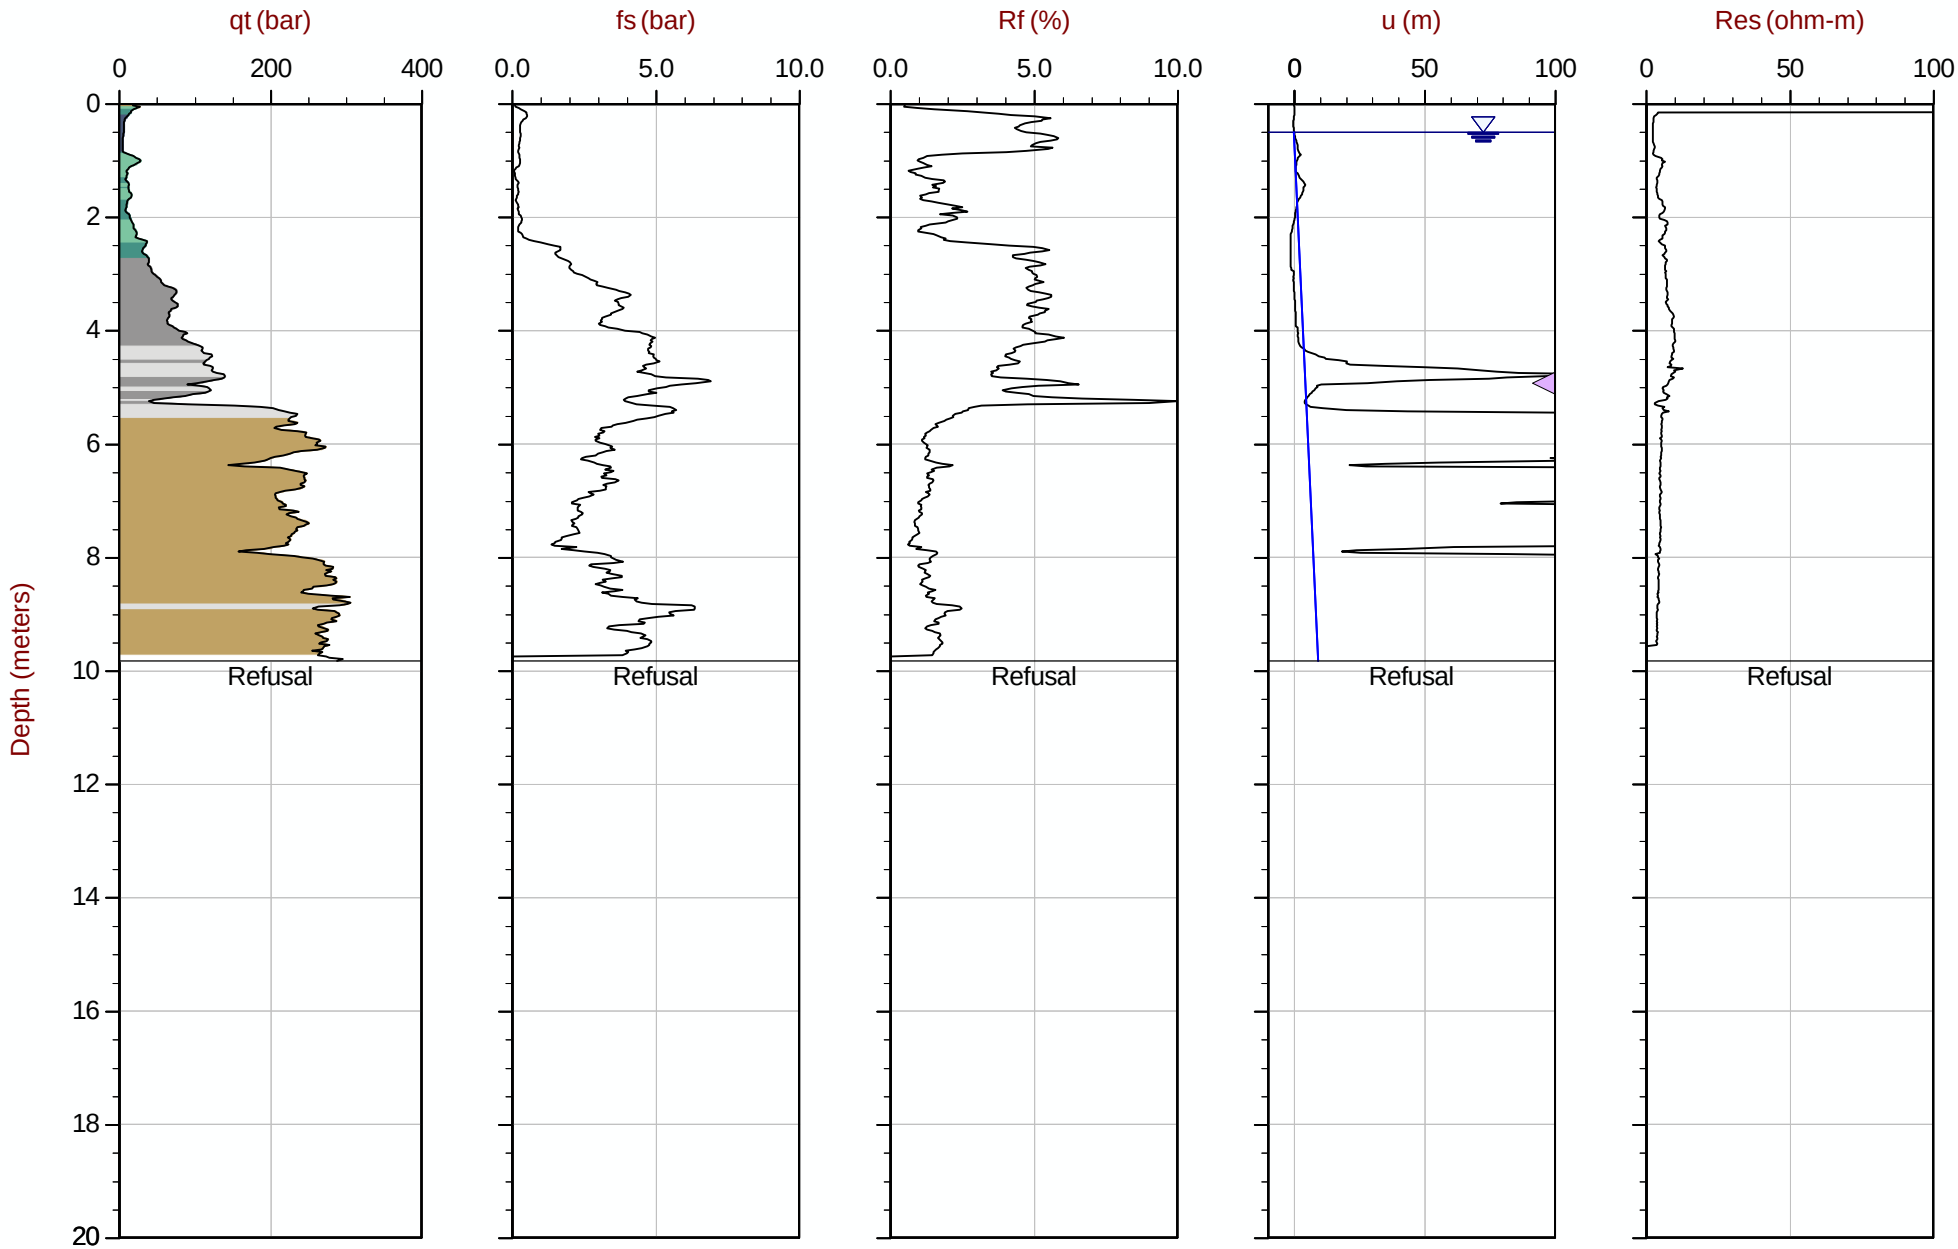

Max Depth: 9.825 m / 32.23 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT336.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609453m E: 414943m Elev: 776.131m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 16:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT337
Cone: 821:T1000F10U35 Area= 15cm2

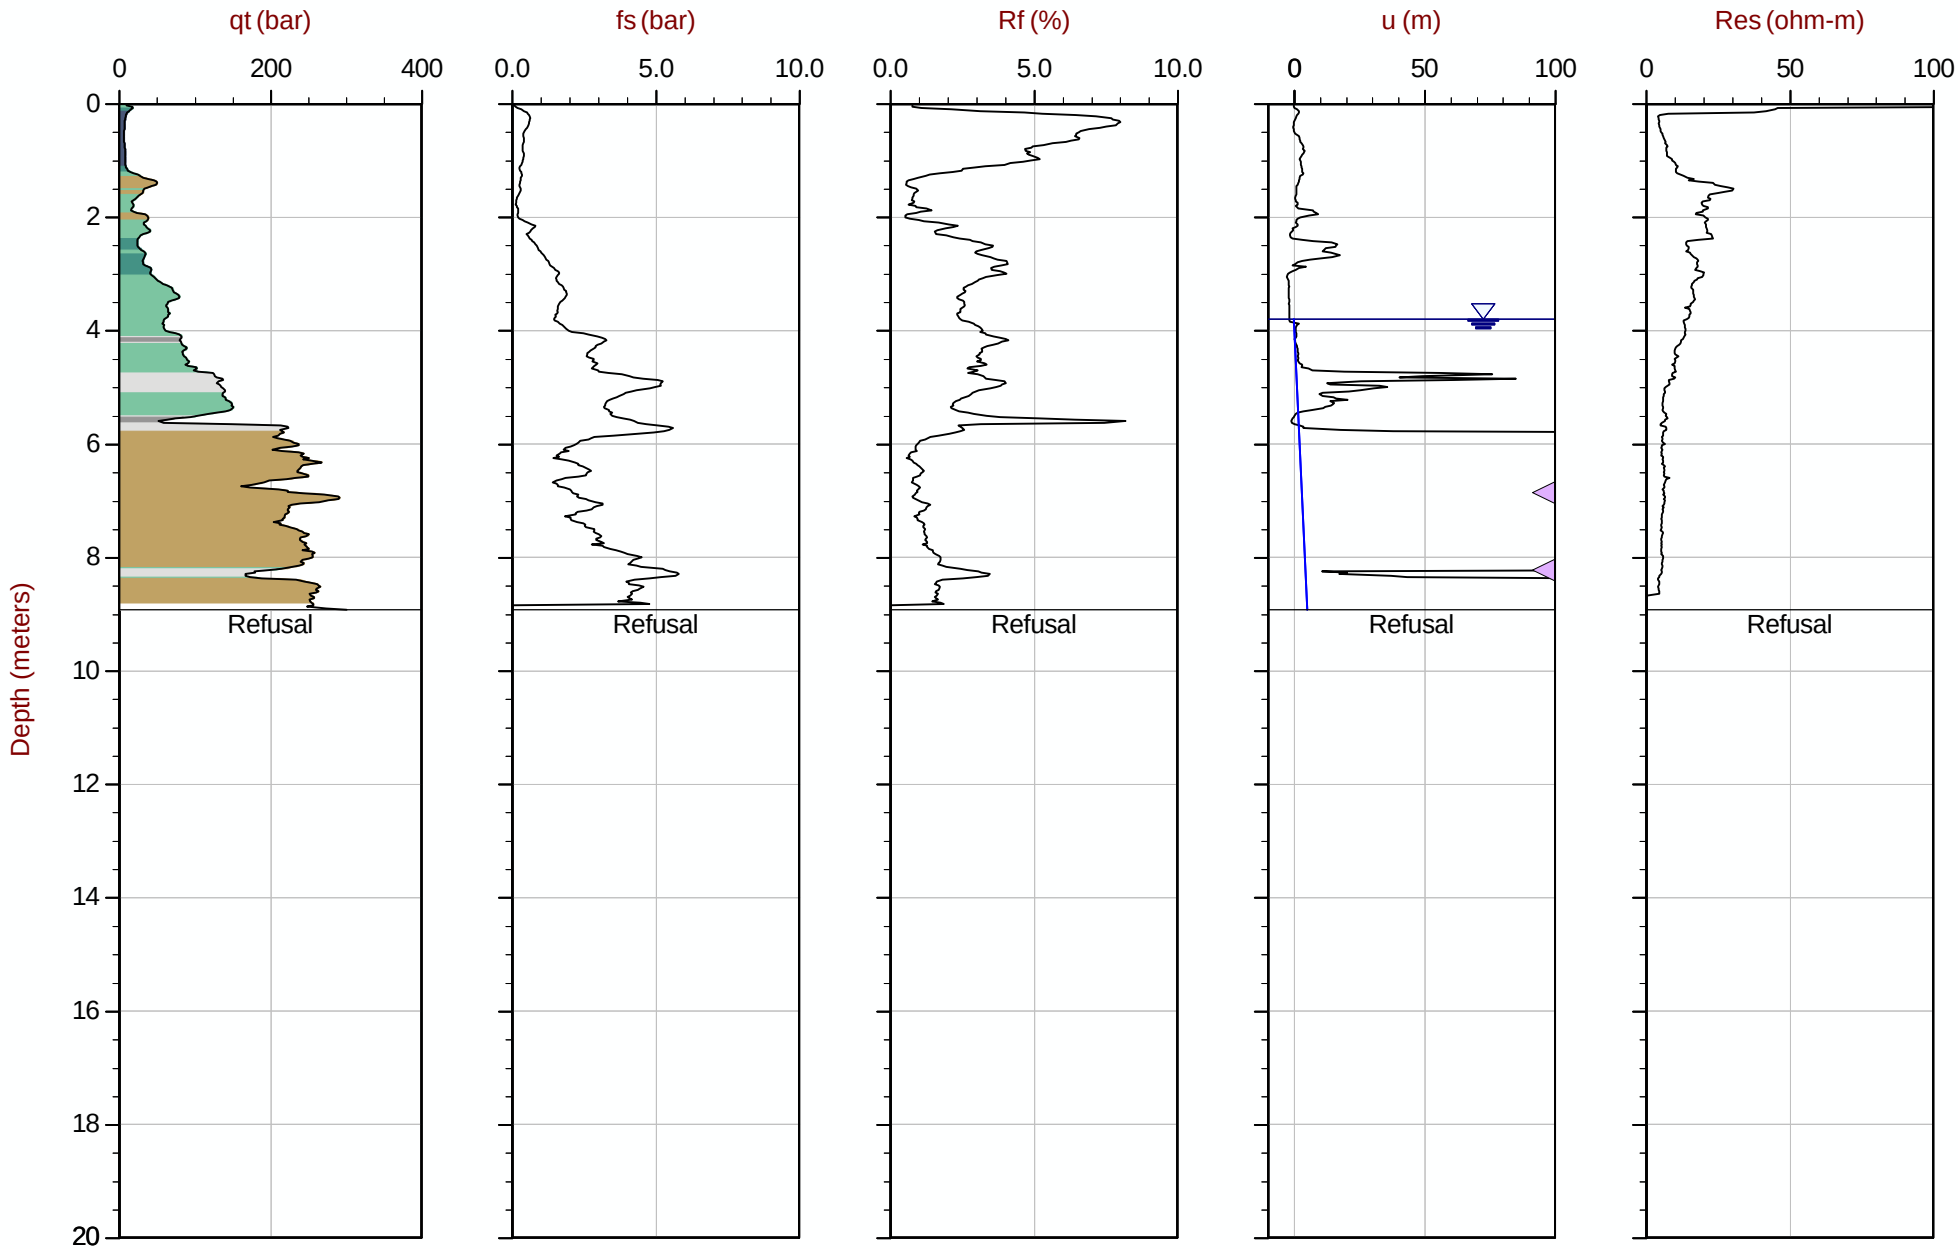

Max Depth: 8.925 m / 29.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT337.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609452m E: 414893m Elev: 776.165m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 07:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT338
Cone: 821:T1000F10U35 Area= 15cm2

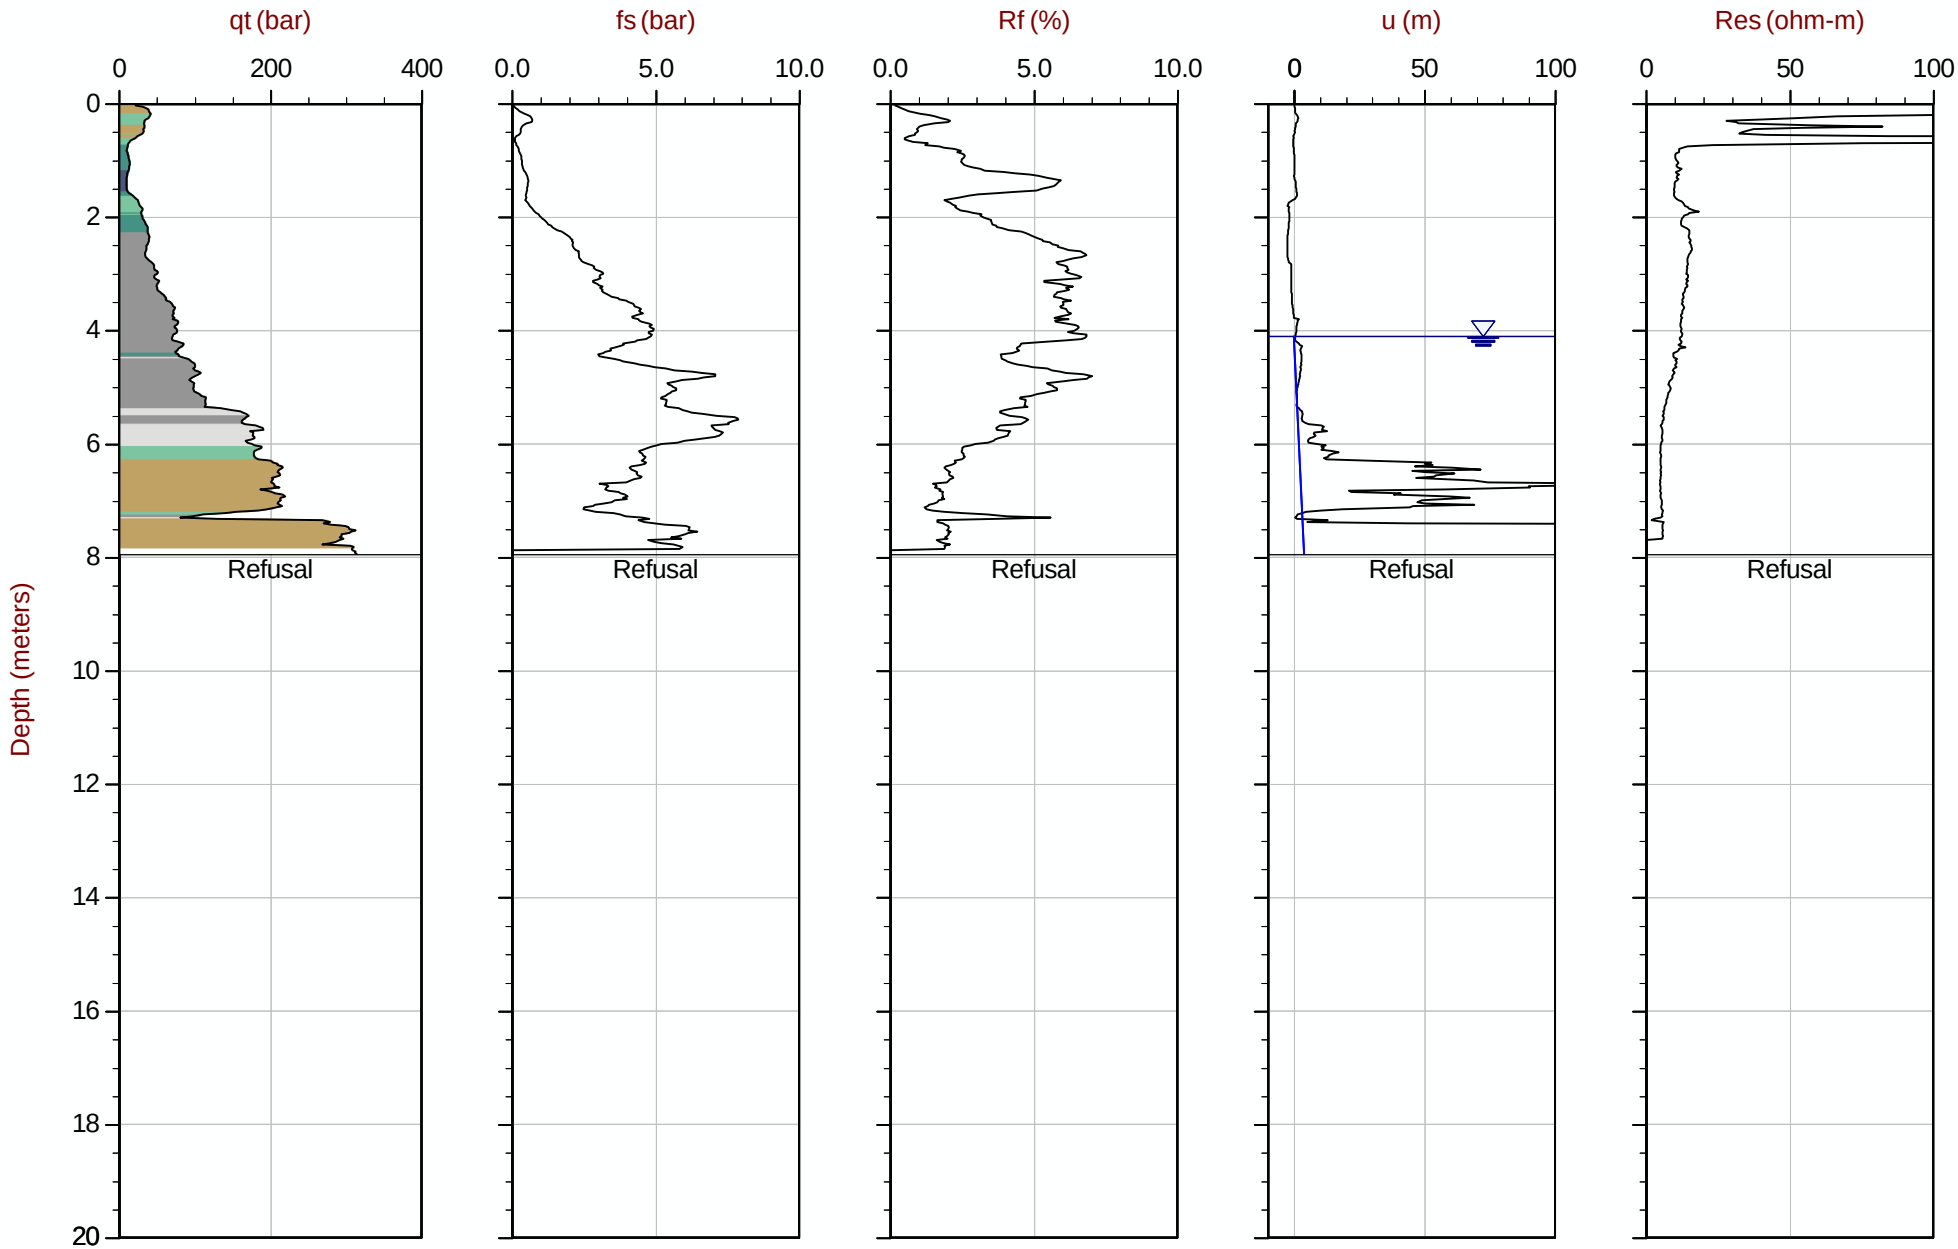

Max Depth: 7.950 m / 26.08 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT338.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609452m E: 414843m Elev: 777.325m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 08:45
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT339
Cone: 821:T1000F10U35 Area= 15cm2

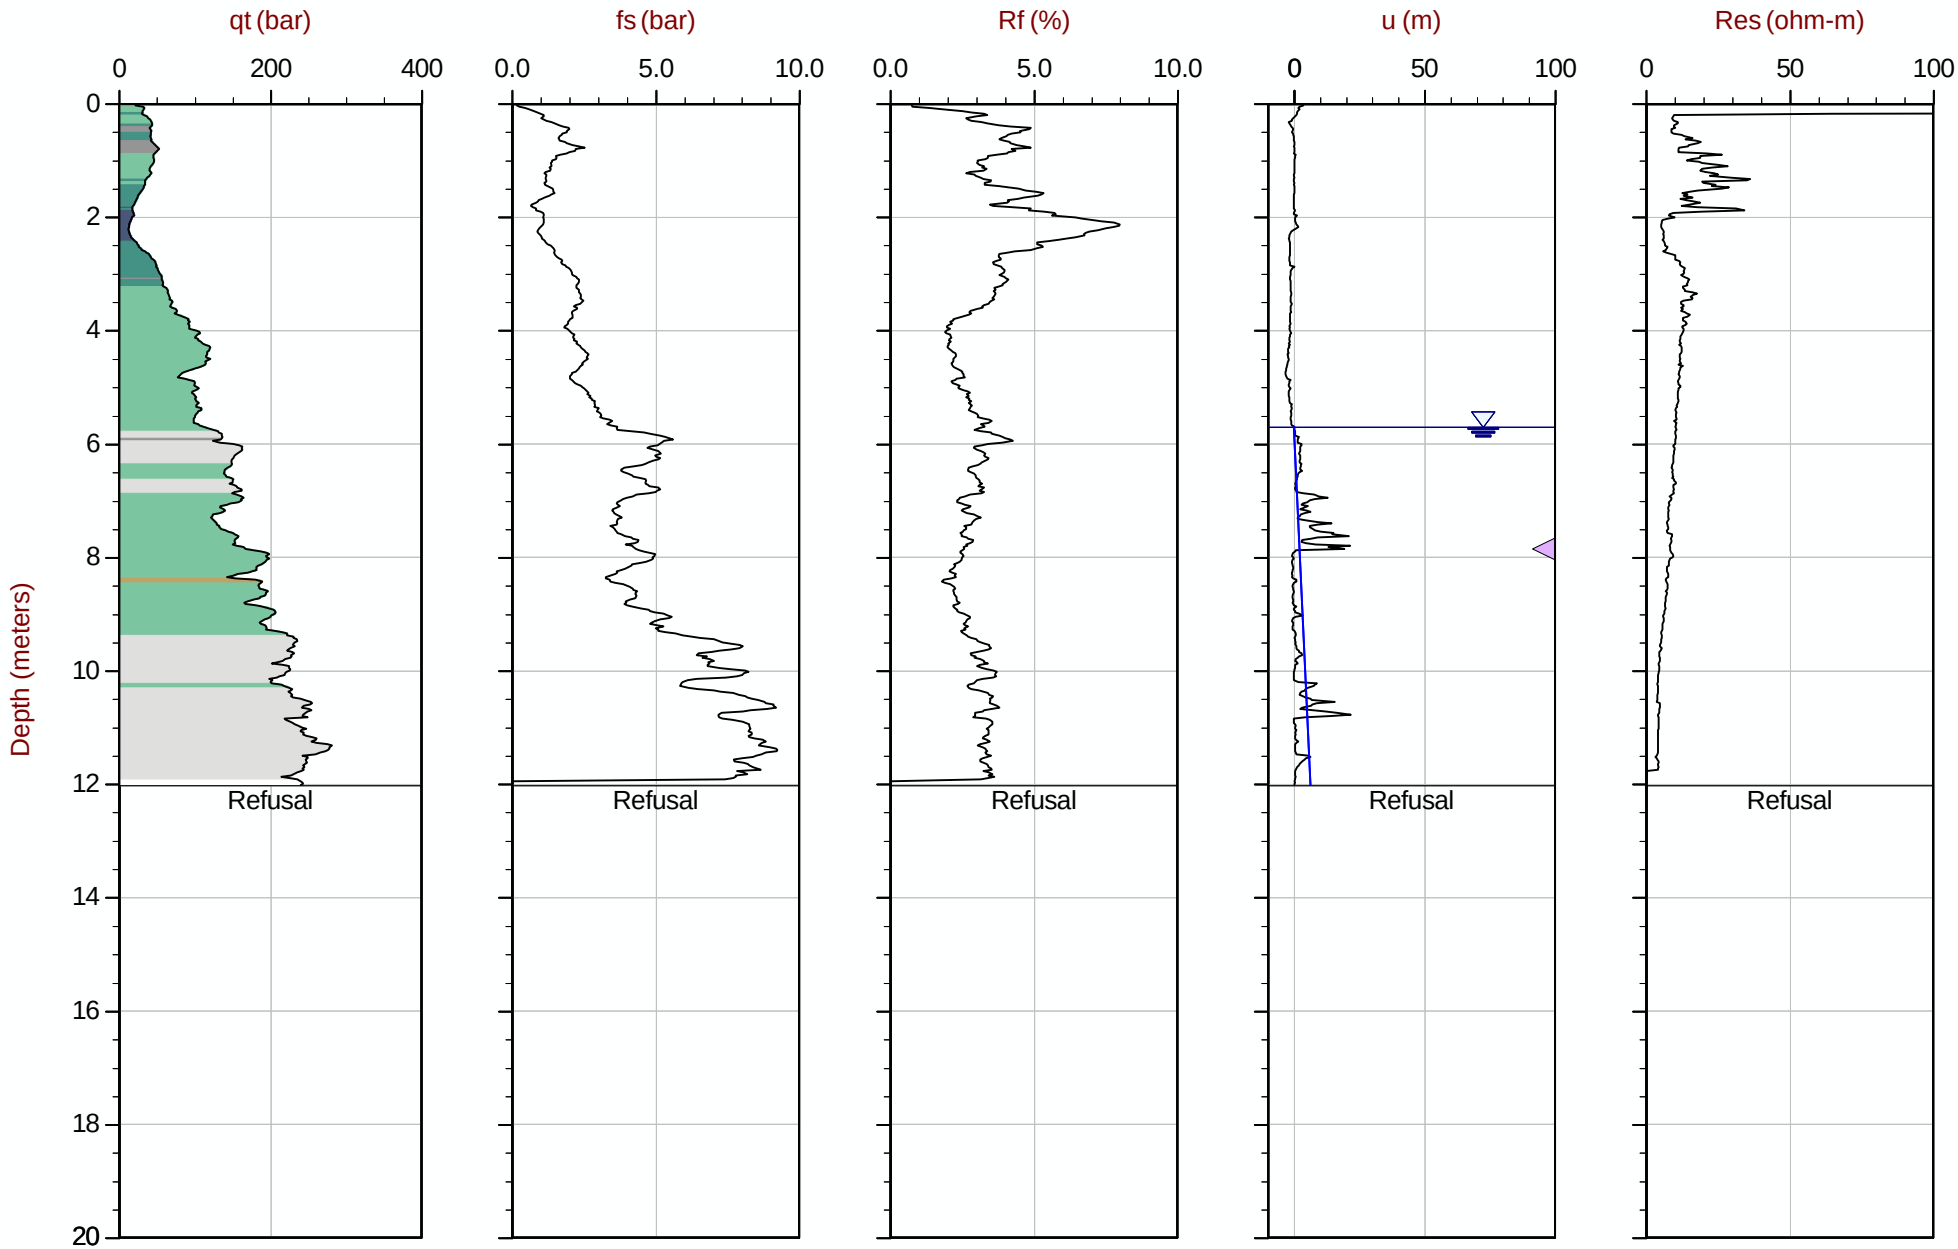

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT339.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609451m E: 414743m Elev: 782.132m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 06:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT340
Cone: 854:T1500F15U35 Area= 15cm2

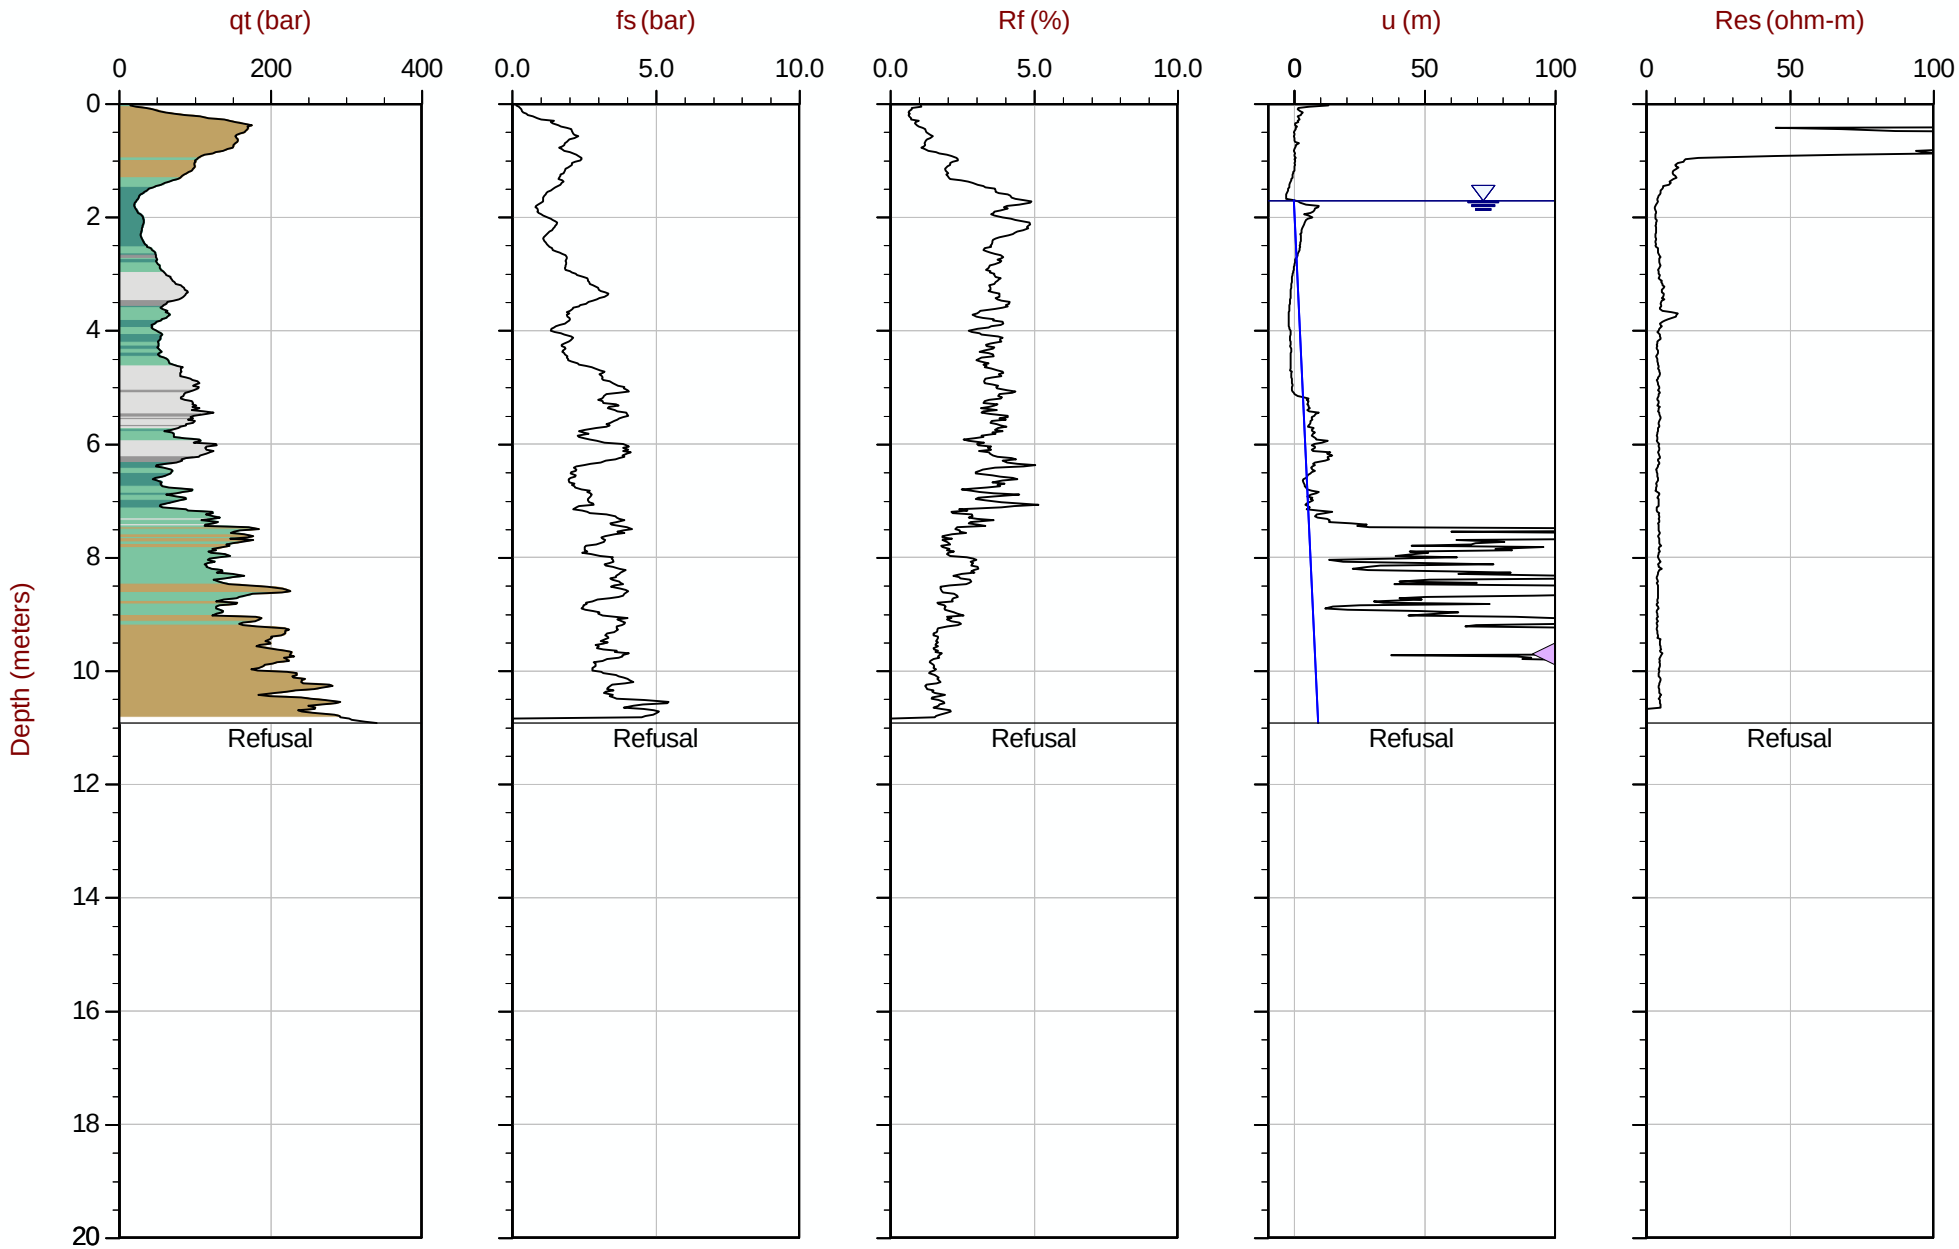

Max Depth: 10.925 m / 35.84 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT340.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609553m E: 416816m Elev: 767.994m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 09:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT341
Cone: 854:T1500F15U35 Area= 15cm2

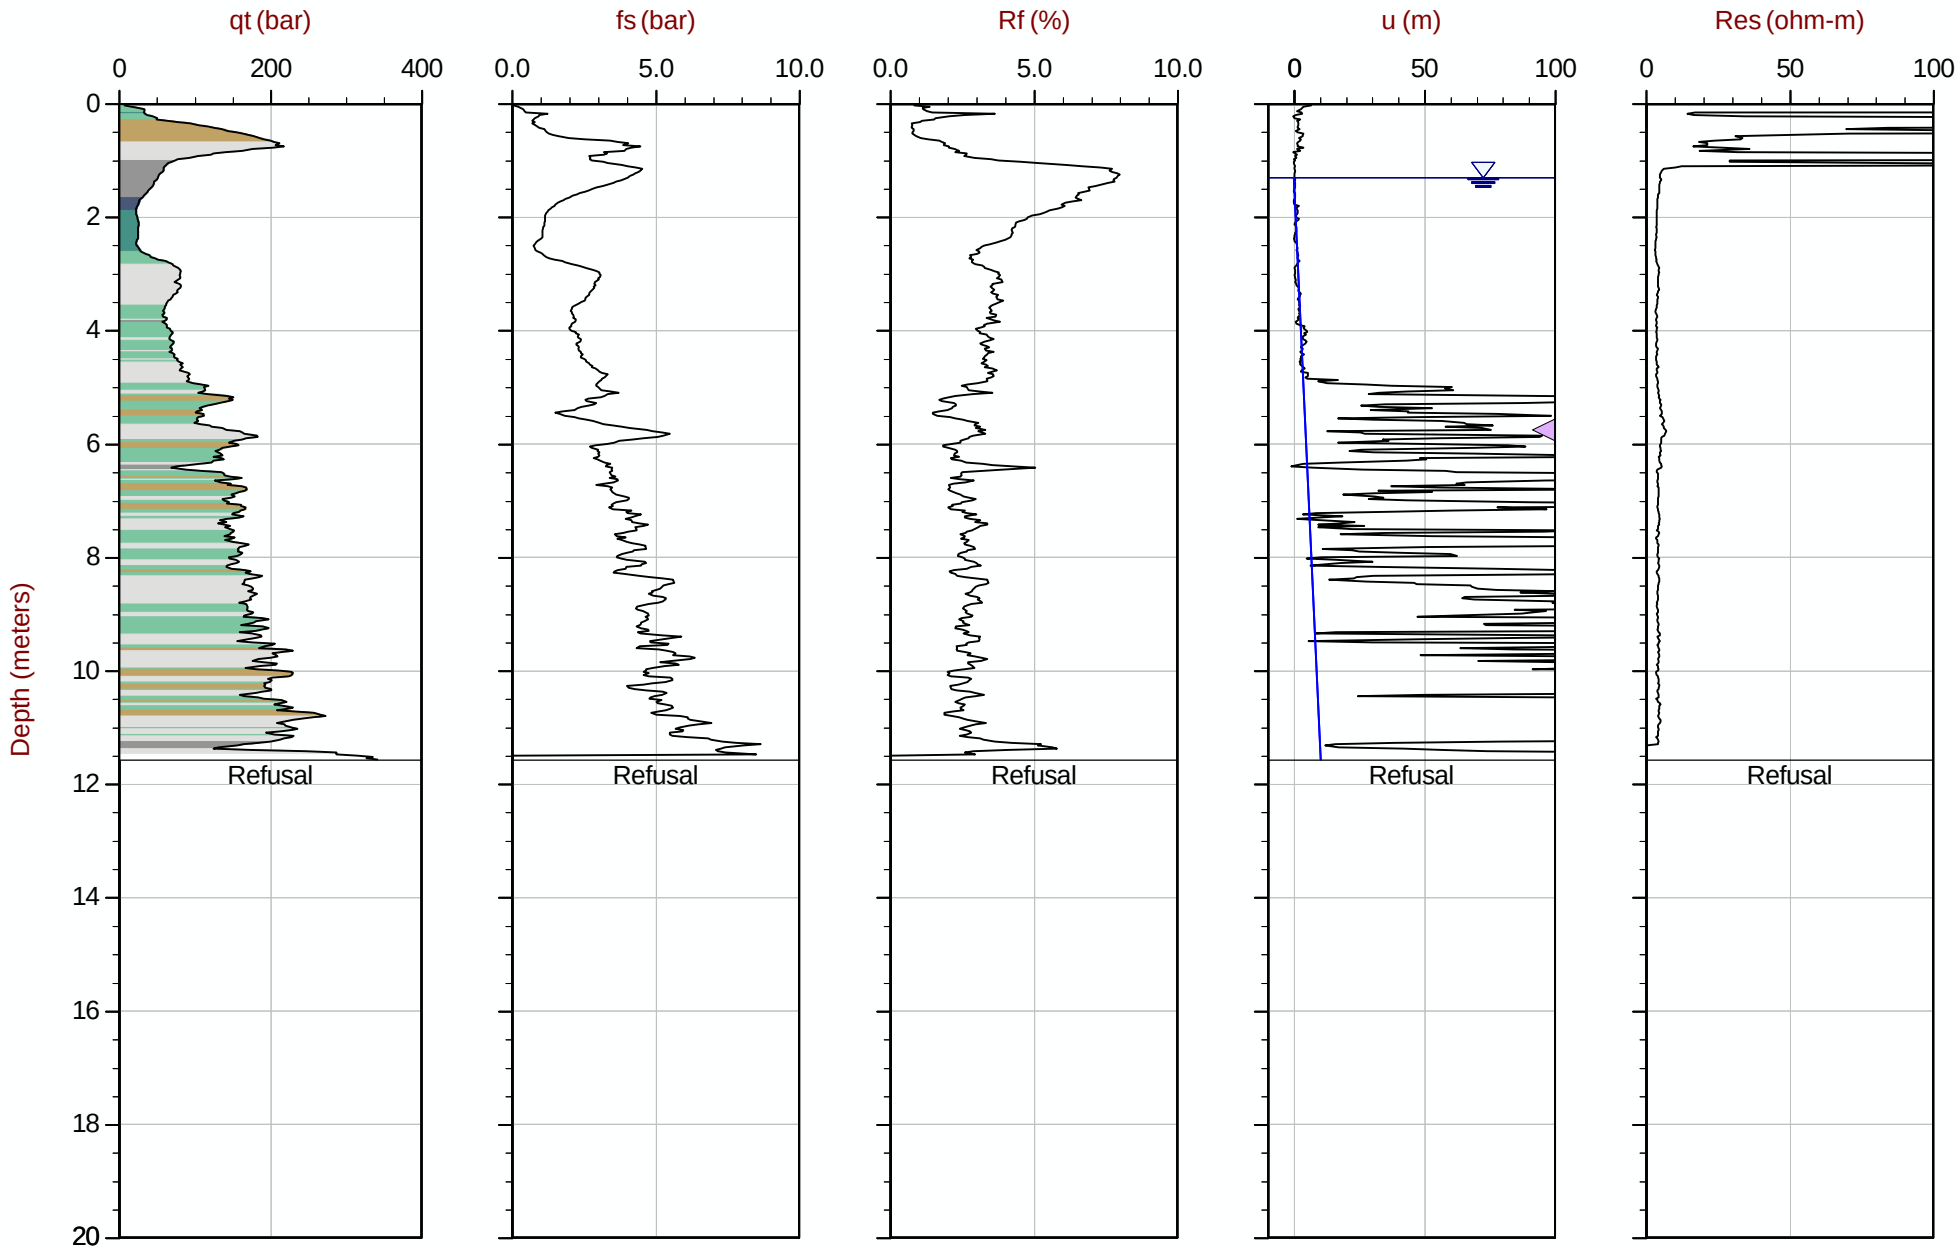

Max Depth: 11.575 m / 37.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT341.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609478m E: 416727m Elev: 768.082m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 15:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT343
Cone: 854:T1500F15U35 Area= 15cm2

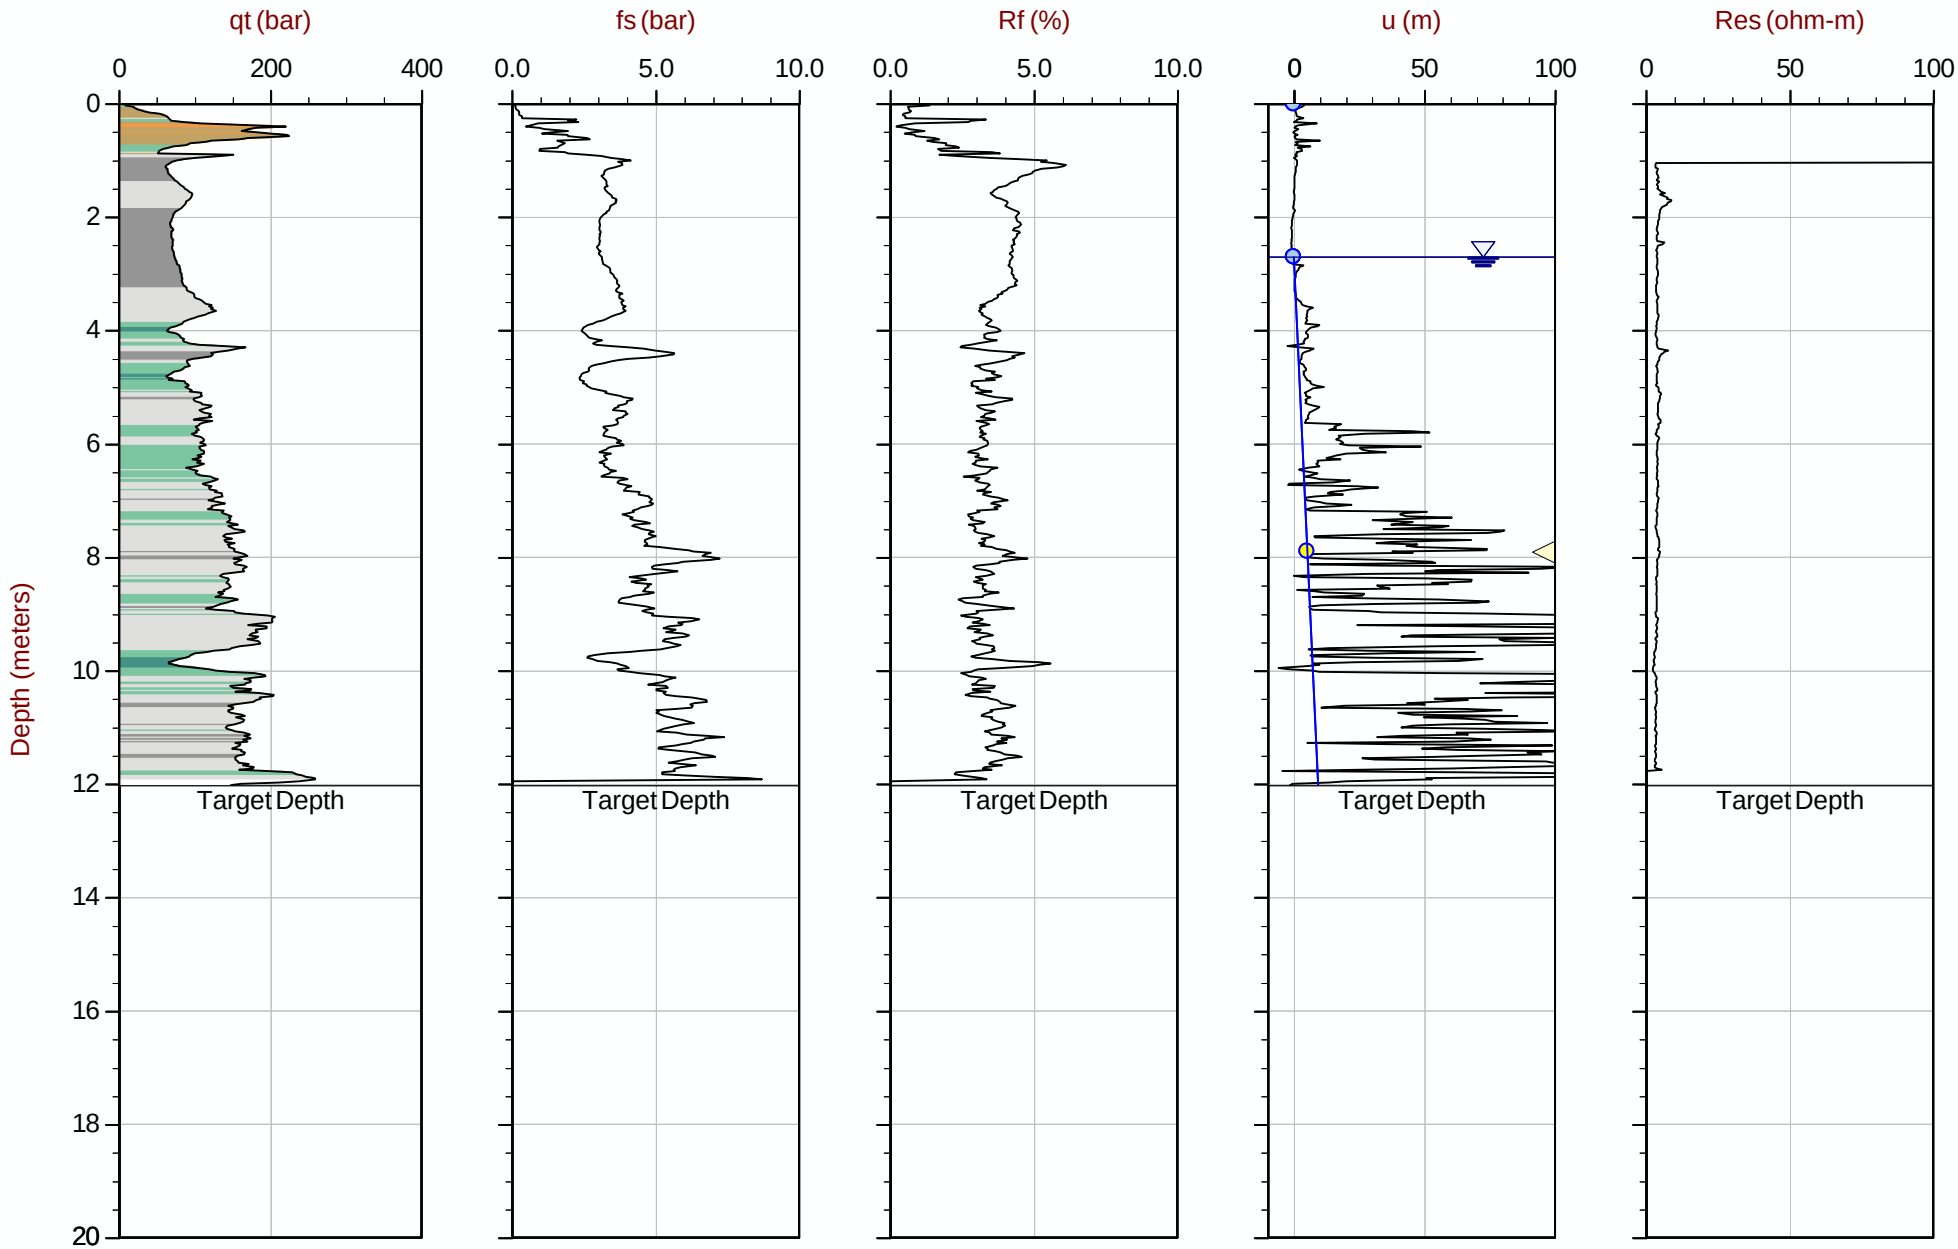

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT343.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609430m E: 416510m Elev: 770.018m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 08:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT344
Cone: 854:T1500F15U35 Area= 15cm2

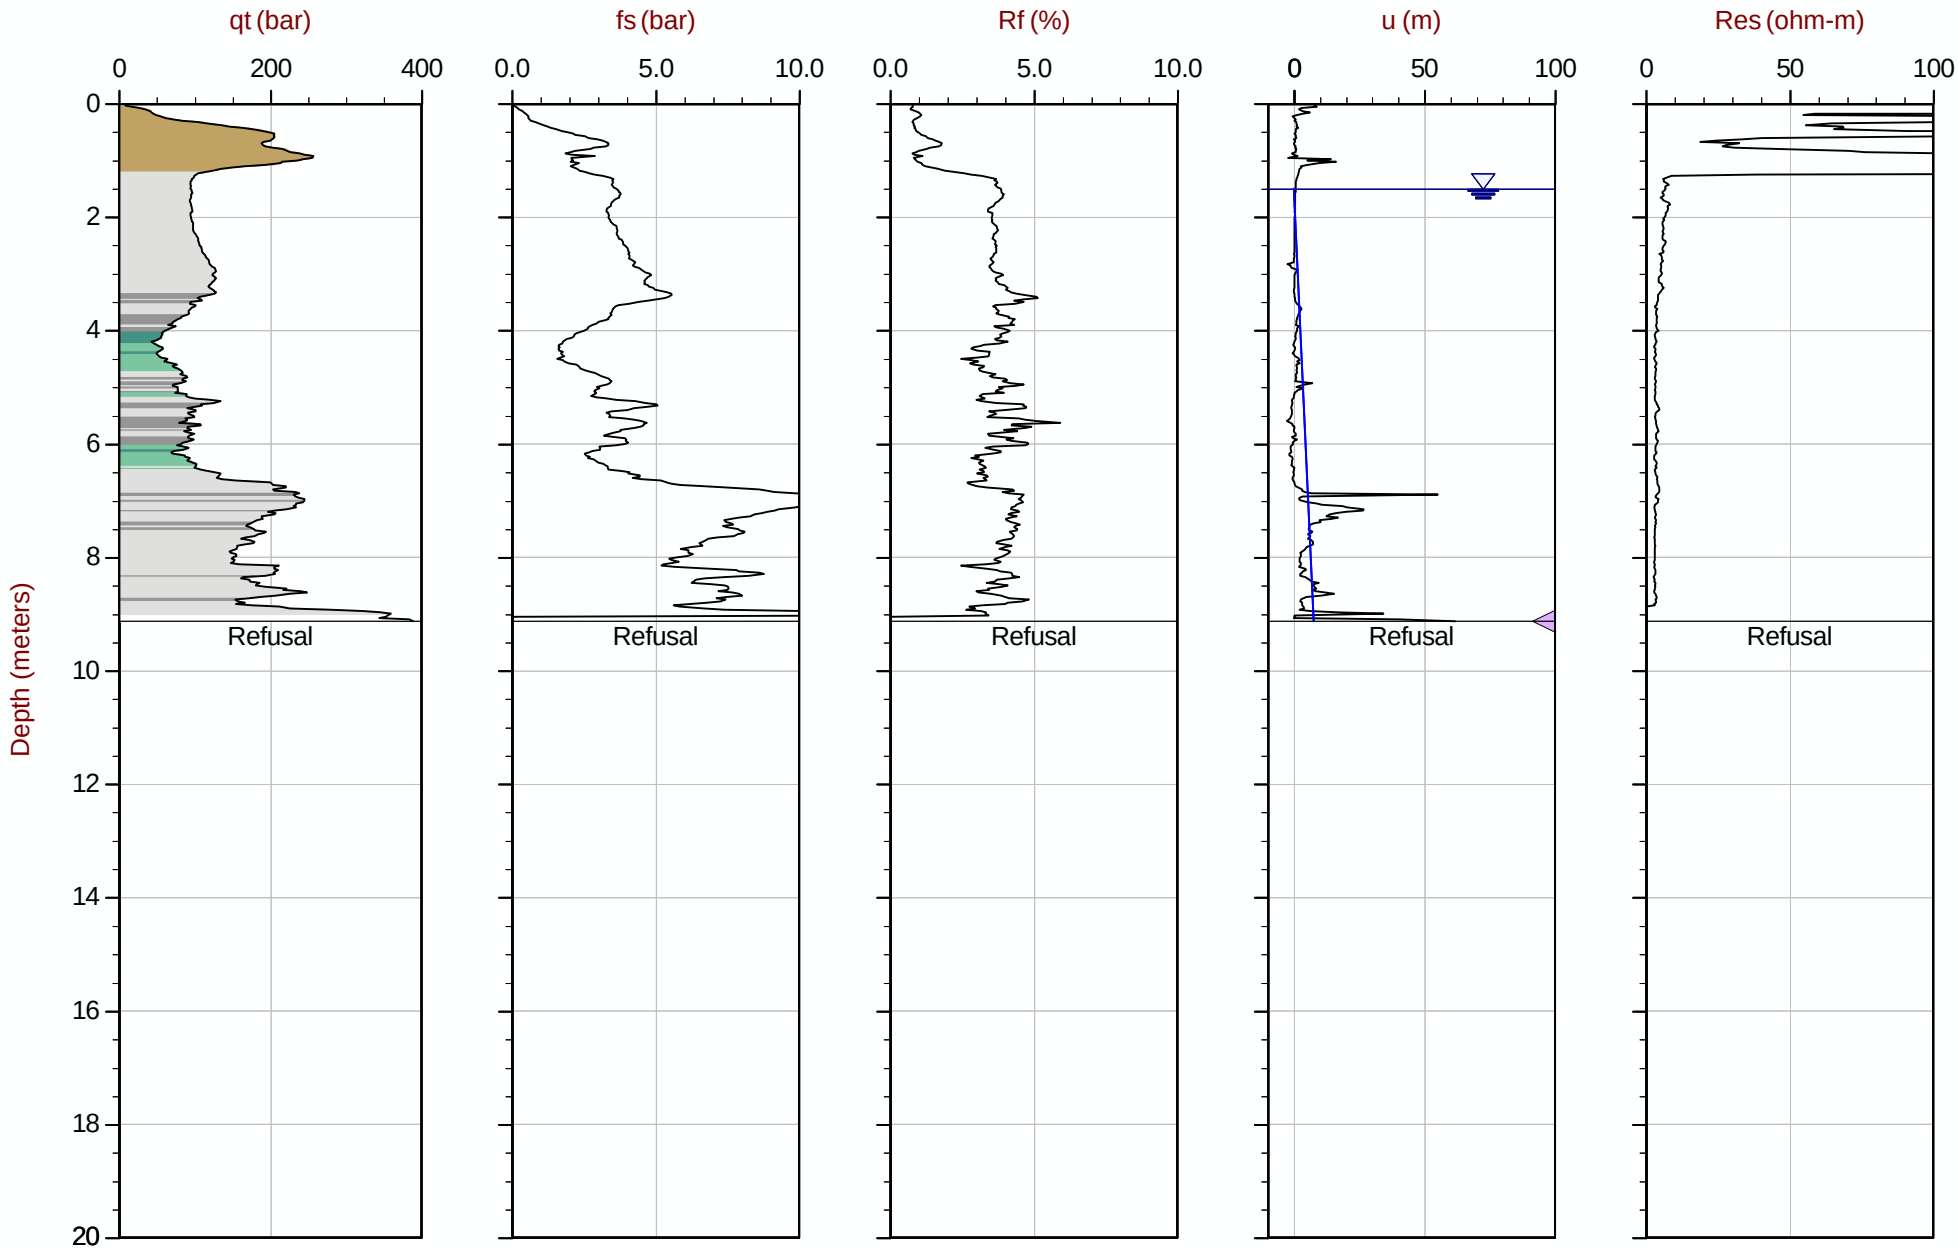

Max Depth: 9.125 m / 29.94 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT344.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609431m E: 416410m Elev: 770.338m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 11:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT345
Cone: 854:T1500F15U35 Area= 15cm2

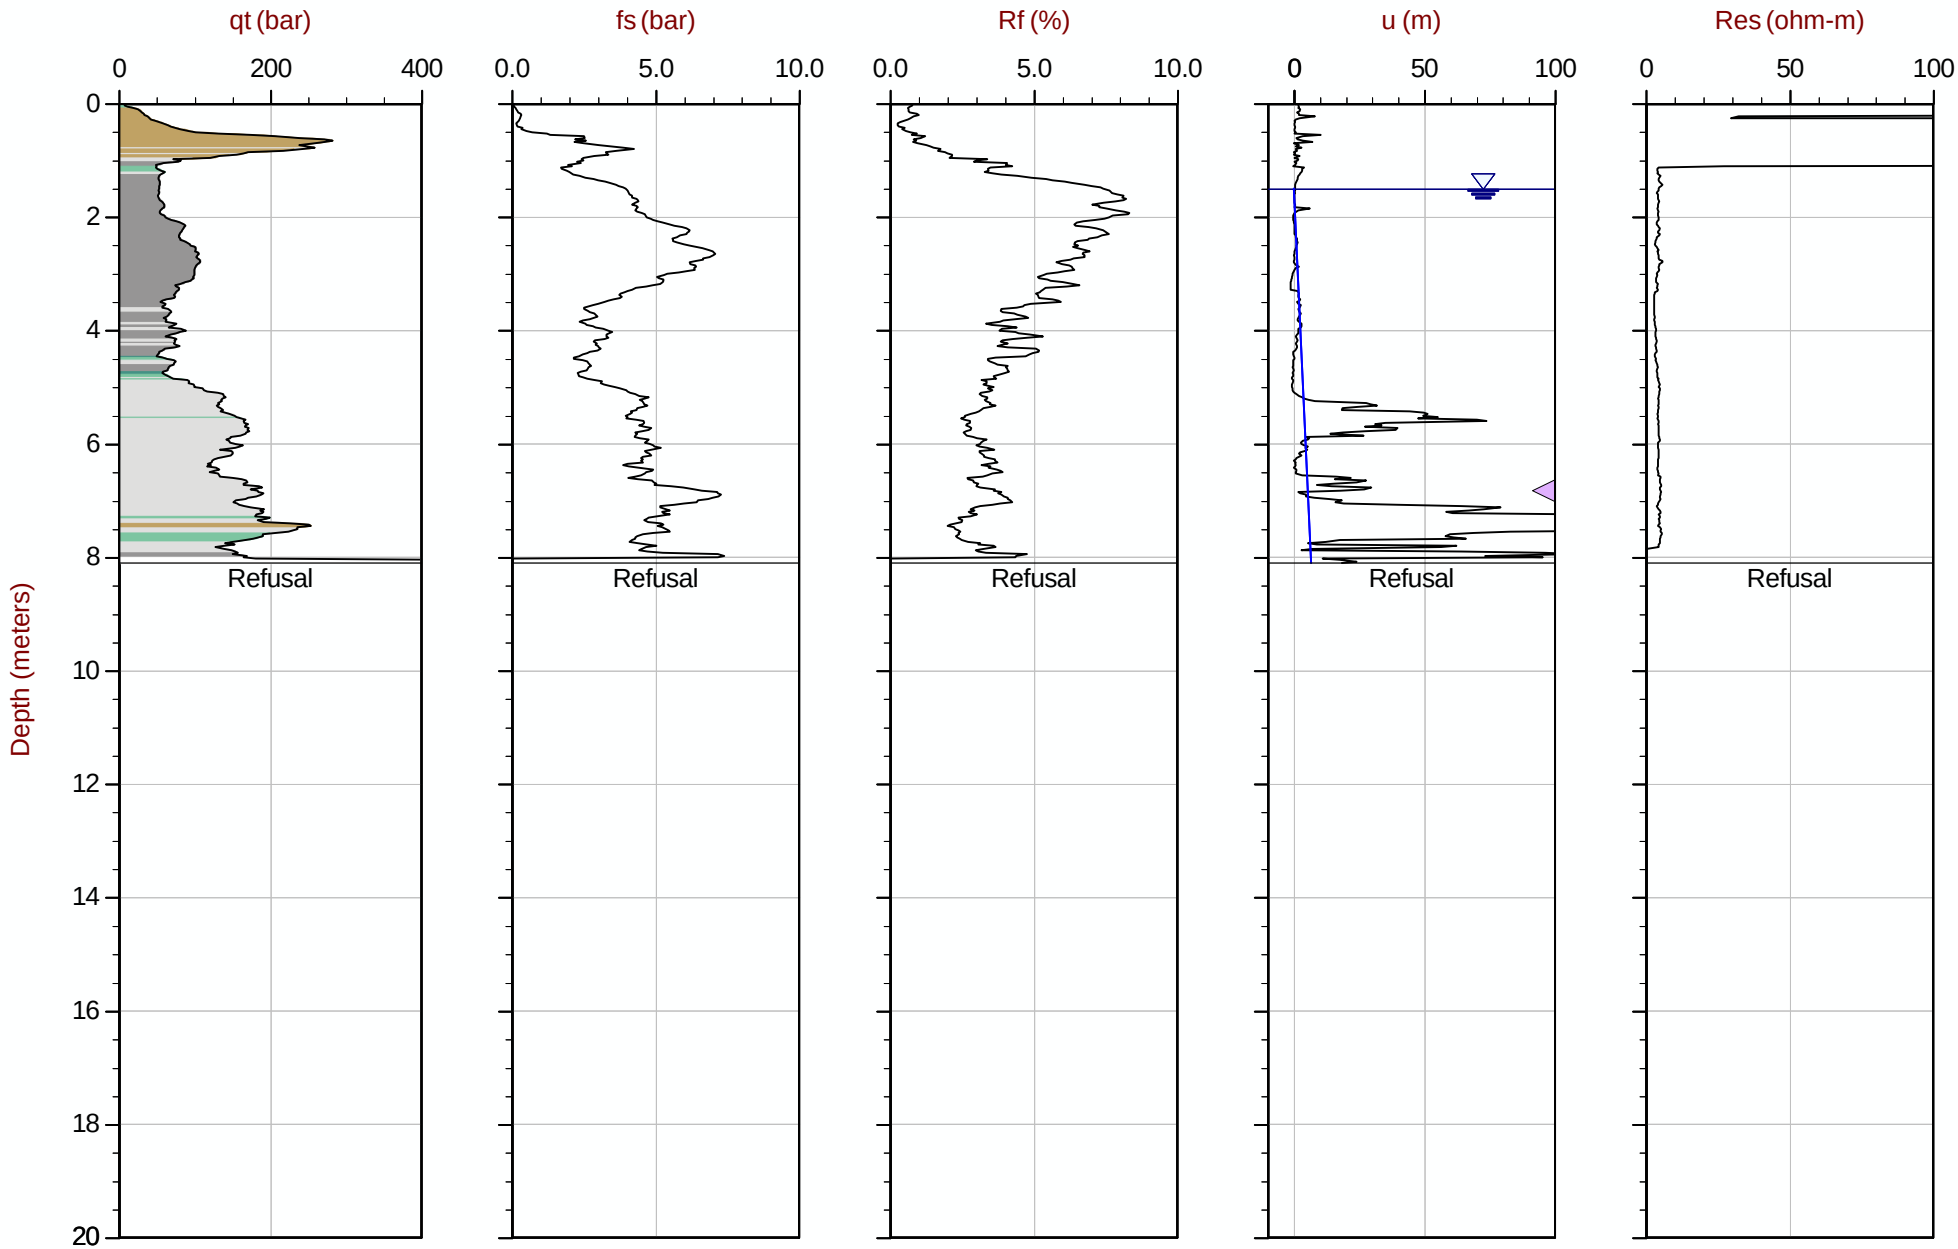

Max Depth: 8.100 m / 26.57 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT345.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609433m E: 416311m Elev: 770.990m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 14:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT346
Cone: 854:T1500F15U35 Area= 15cm2

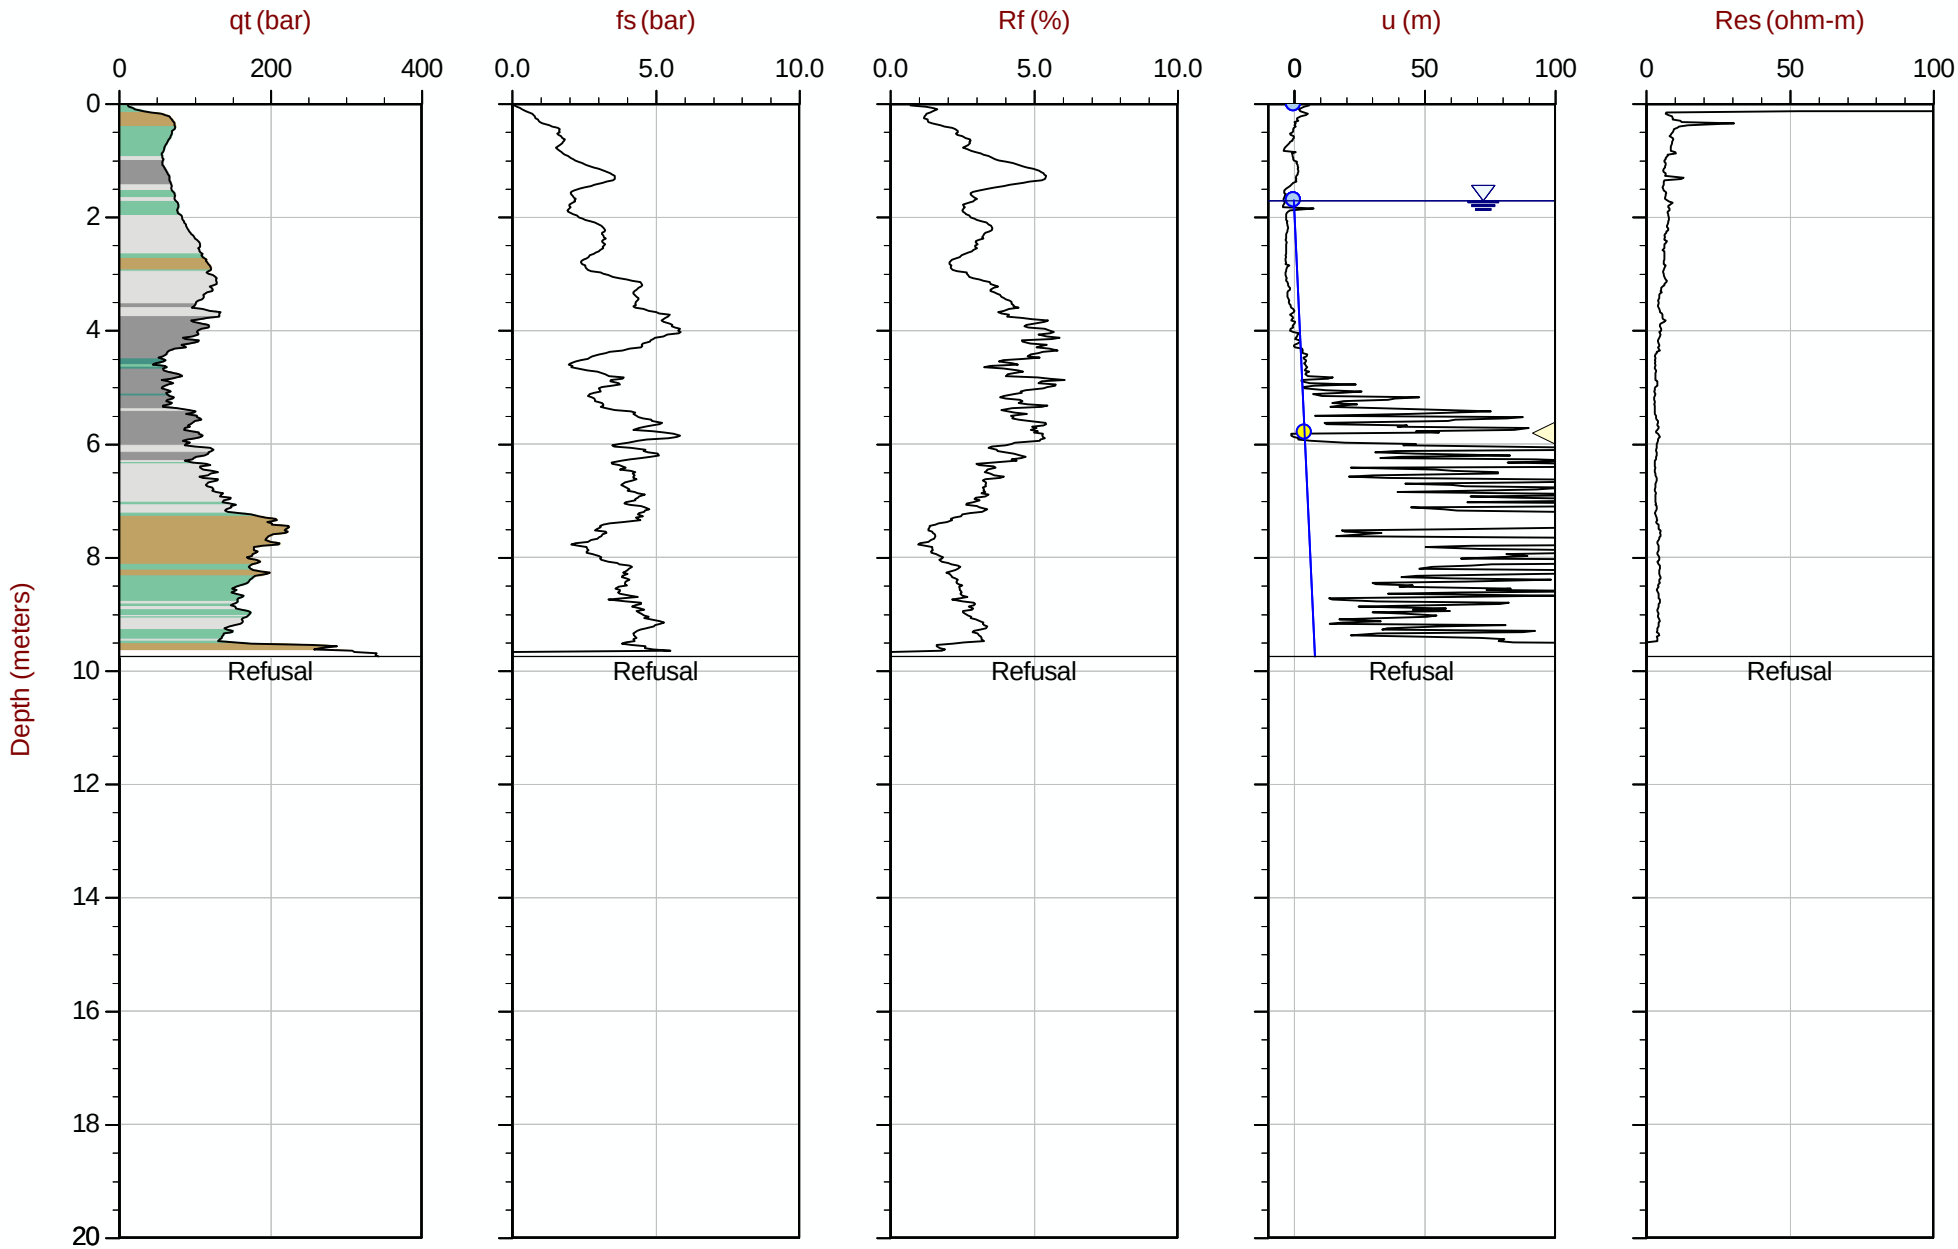

Max Depth: 9.750 m / 31.99 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT346.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609434m E: 416210m Elev: 771.330m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 07:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT347
Cone: 854:T1500F15U35 Area= 15cm2

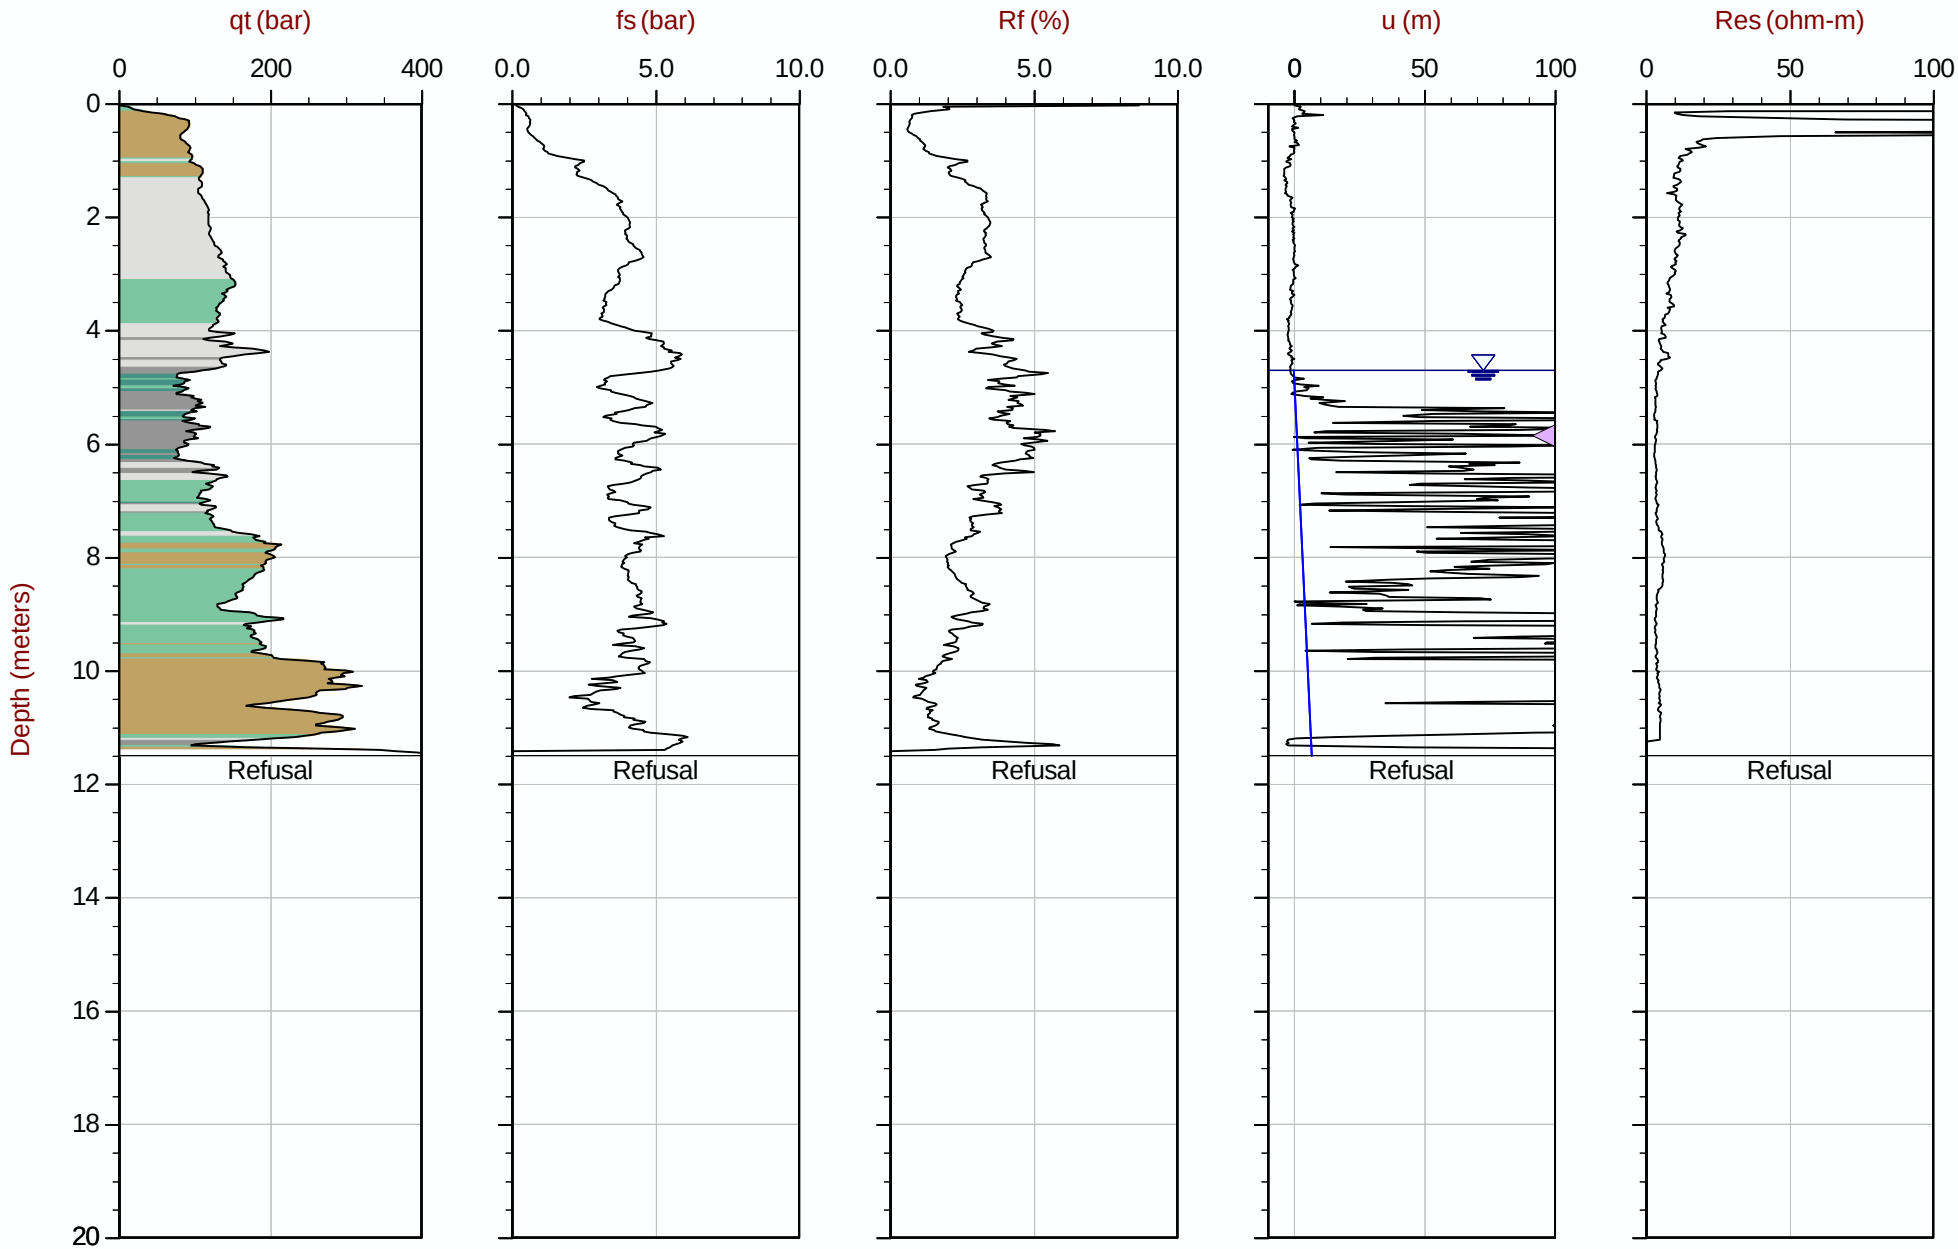

Max Depth: 11.500 m / 37.73 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT347.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 416111m Elev: 771.904m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 11:18
Site: Brooks, Alberta

Sounding: RCPT22-22CPT348
Cone: 854:T1500F15U35 Area= 15cm2

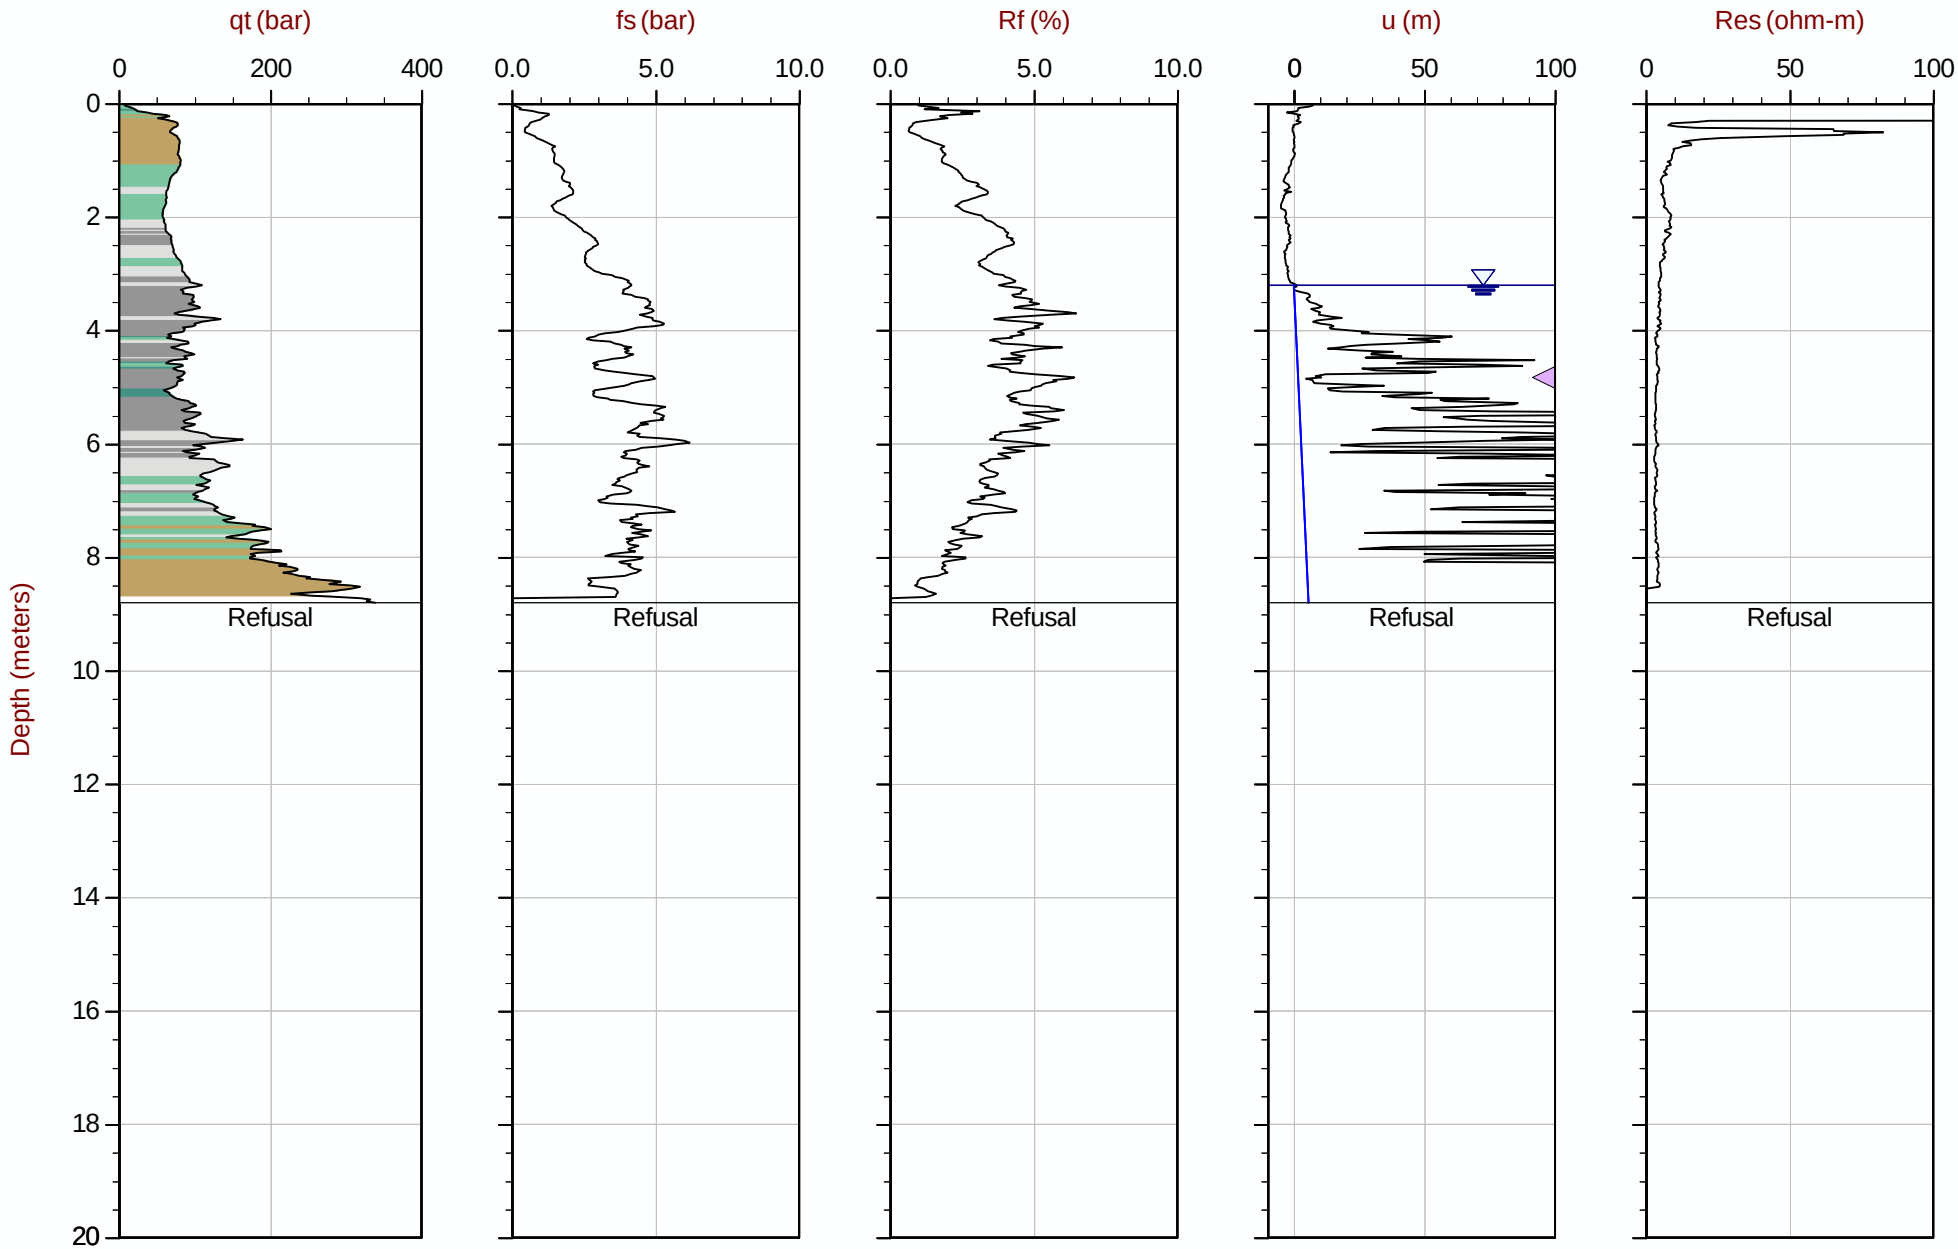

Max Depth: 8.800 m / 28.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT348.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609434m E: 416011m Elev: 771.568m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 16:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT350
Cone: 854:T1500F15U35 Area= 15cm2

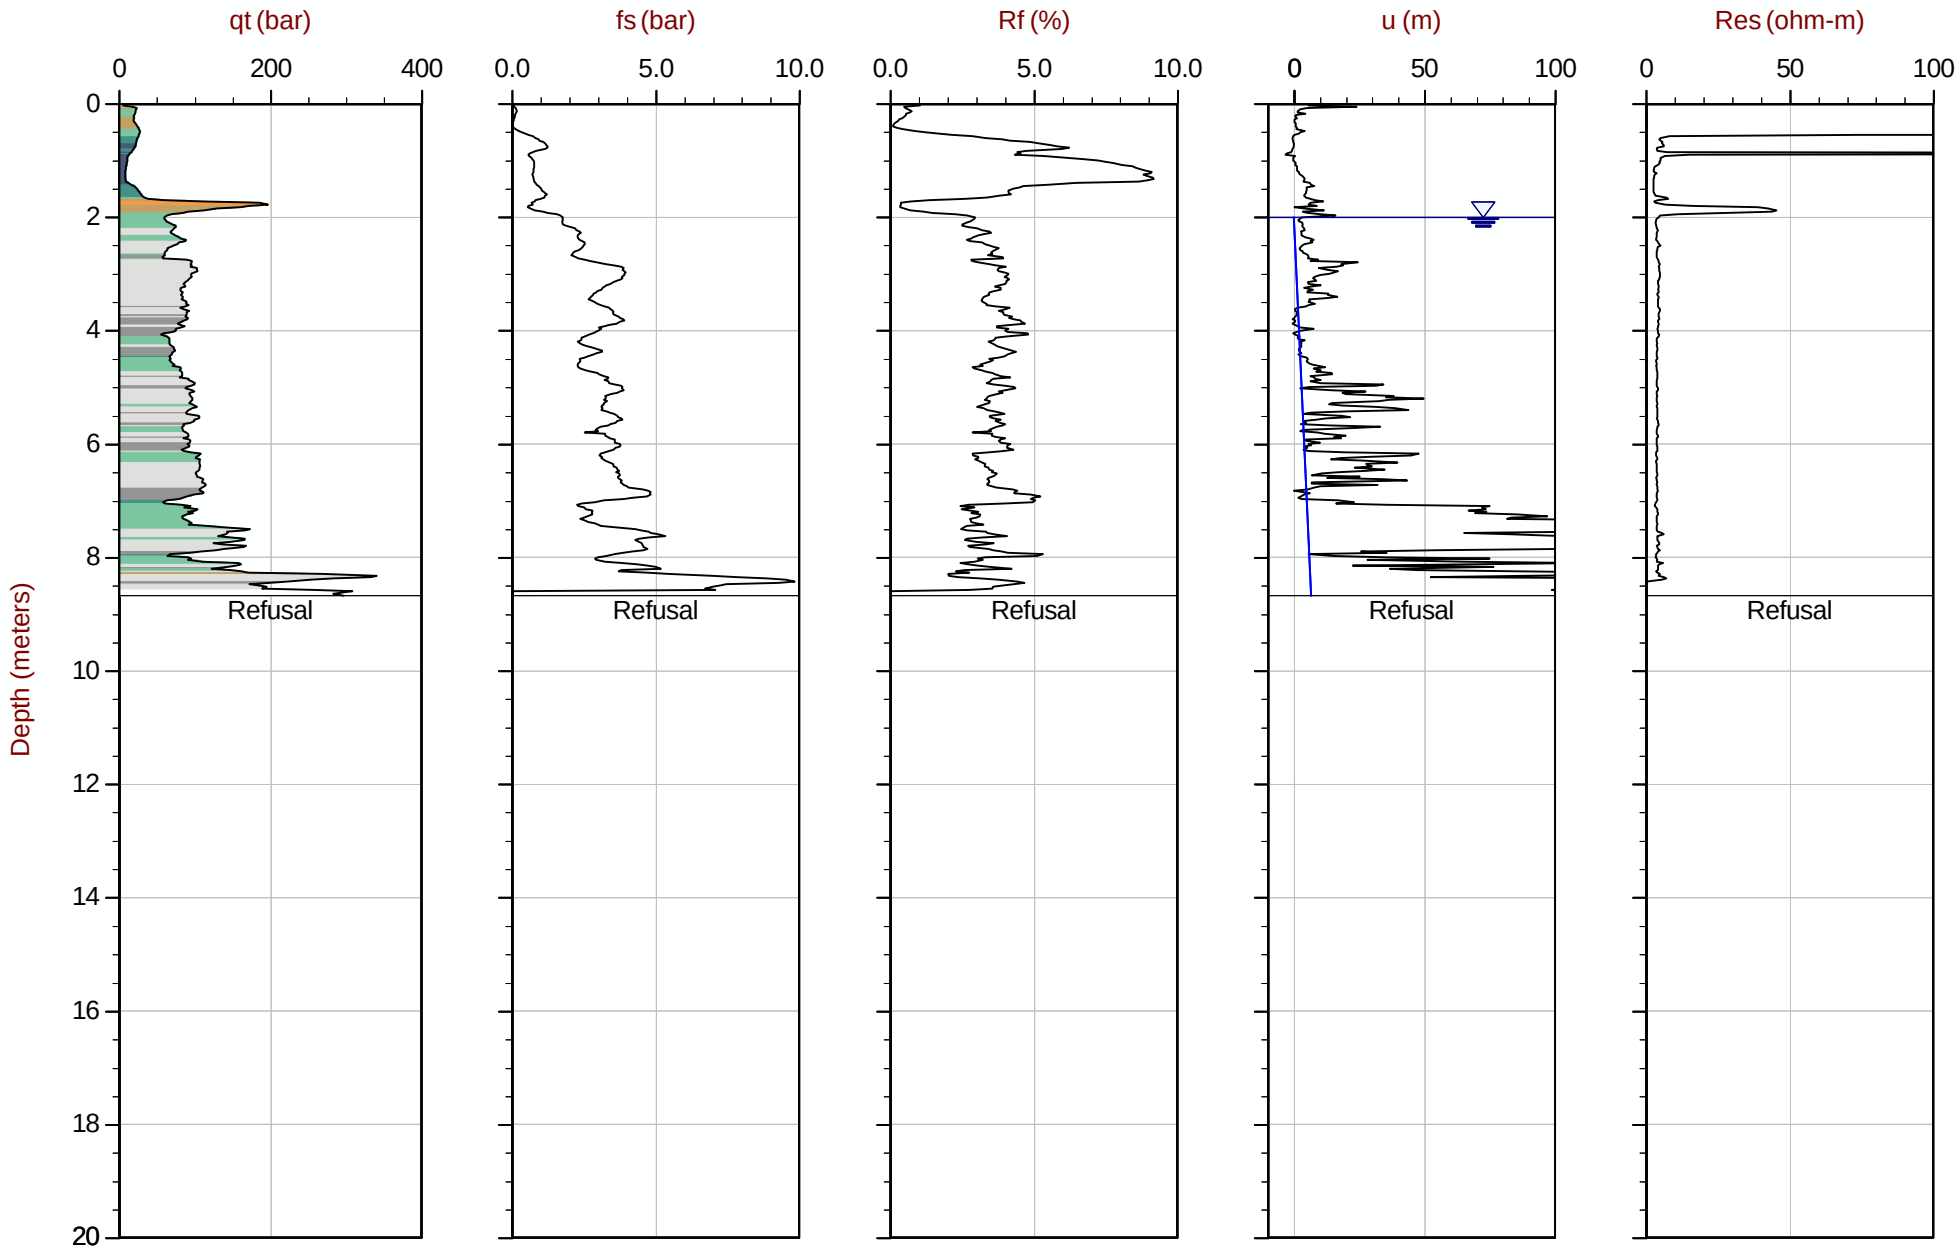

Max Depth: 8.675 m / 28.46 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT350.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609433m E: 415811m Elev: 772.579m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 09:30
Site: Brooks, Alberta

Sounding: RCPT22-22CPT351
Cone: 854:T1500F15U35 Area= 15cm2

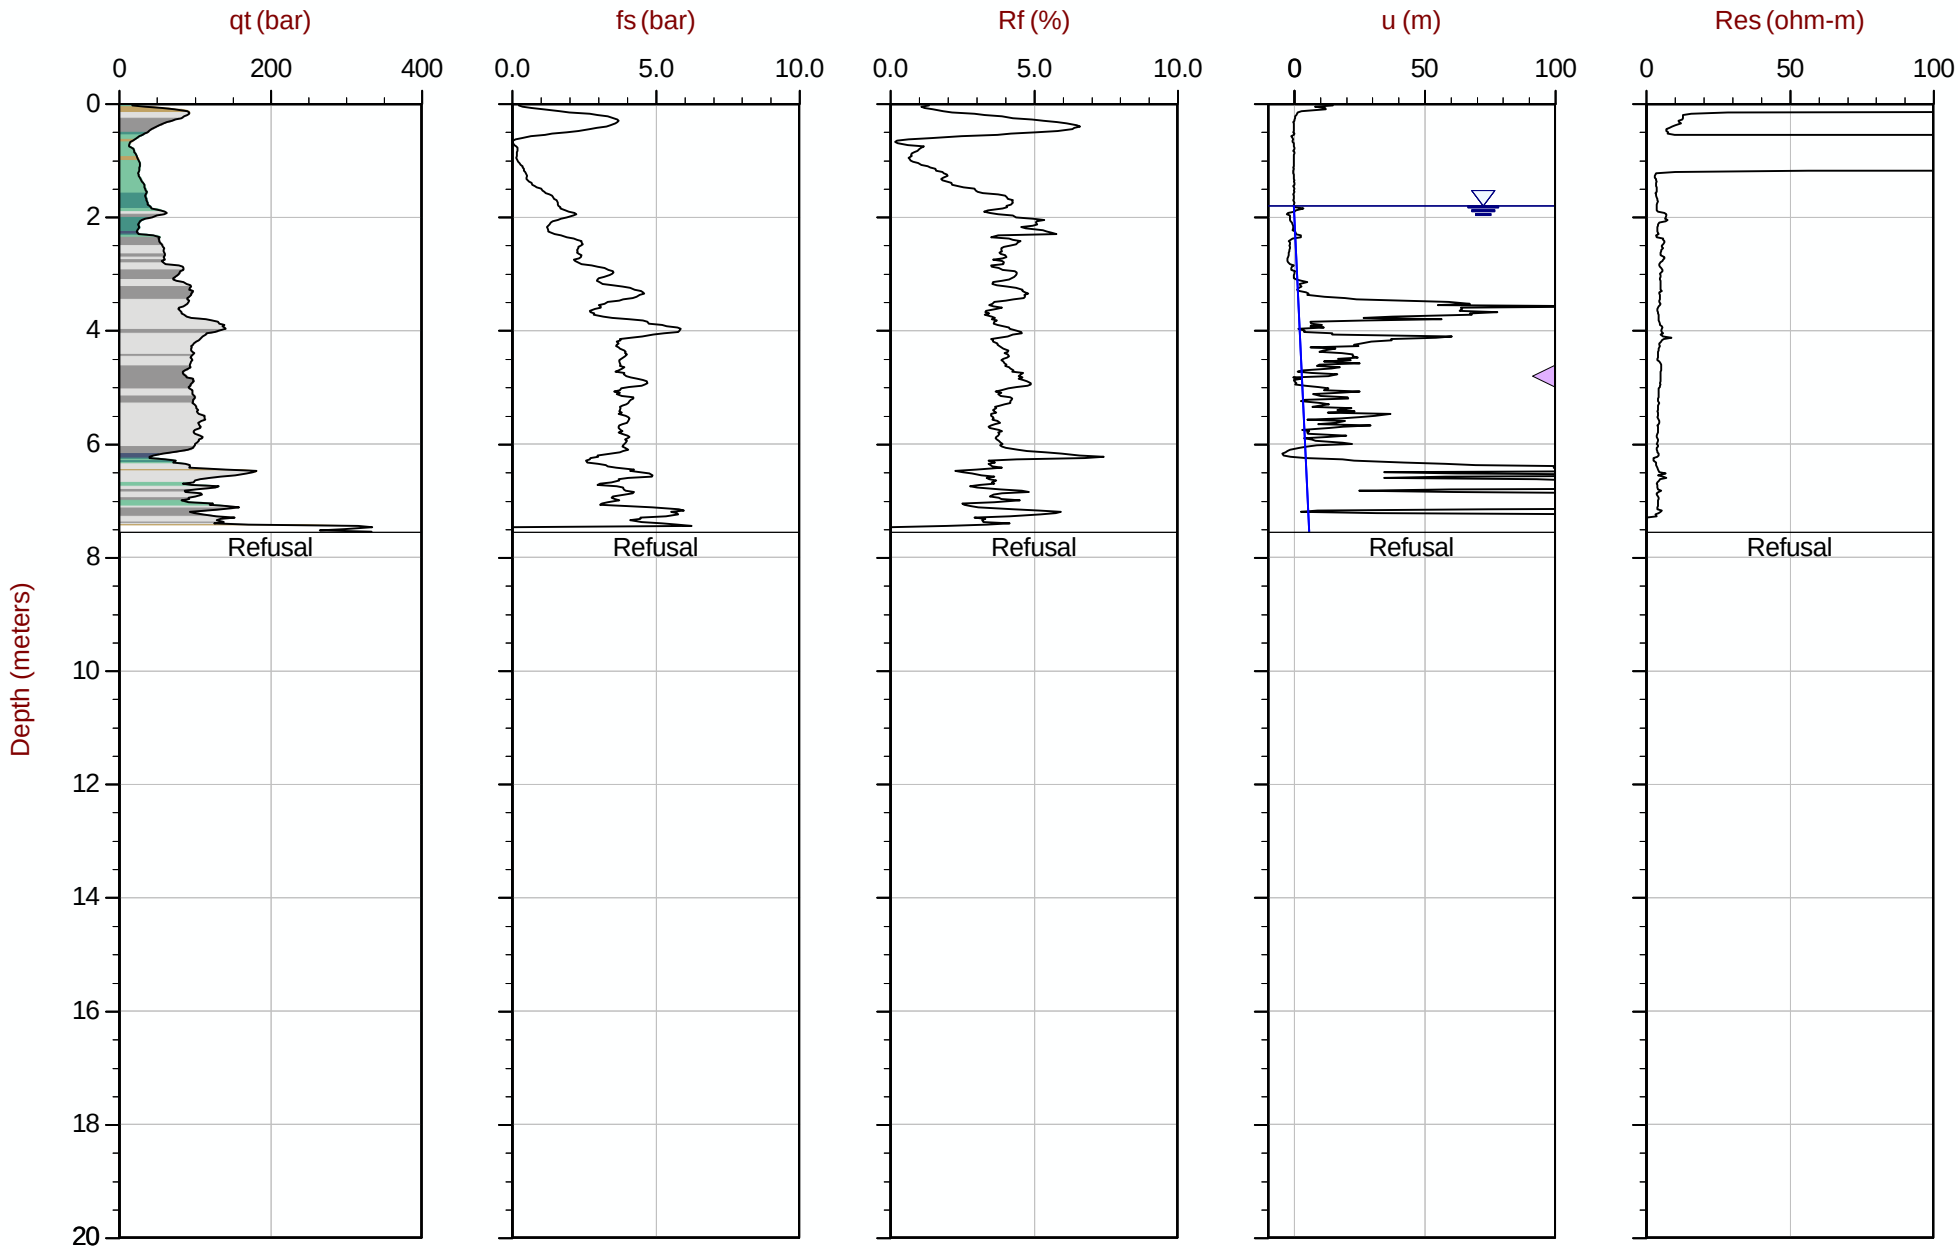

Max Depth: 7.550 m / 24.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT351.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609432m E: 415711m Elev: 772.955m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 11:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT352
Cone: 854:T1500F15U35 Area= 15cm2

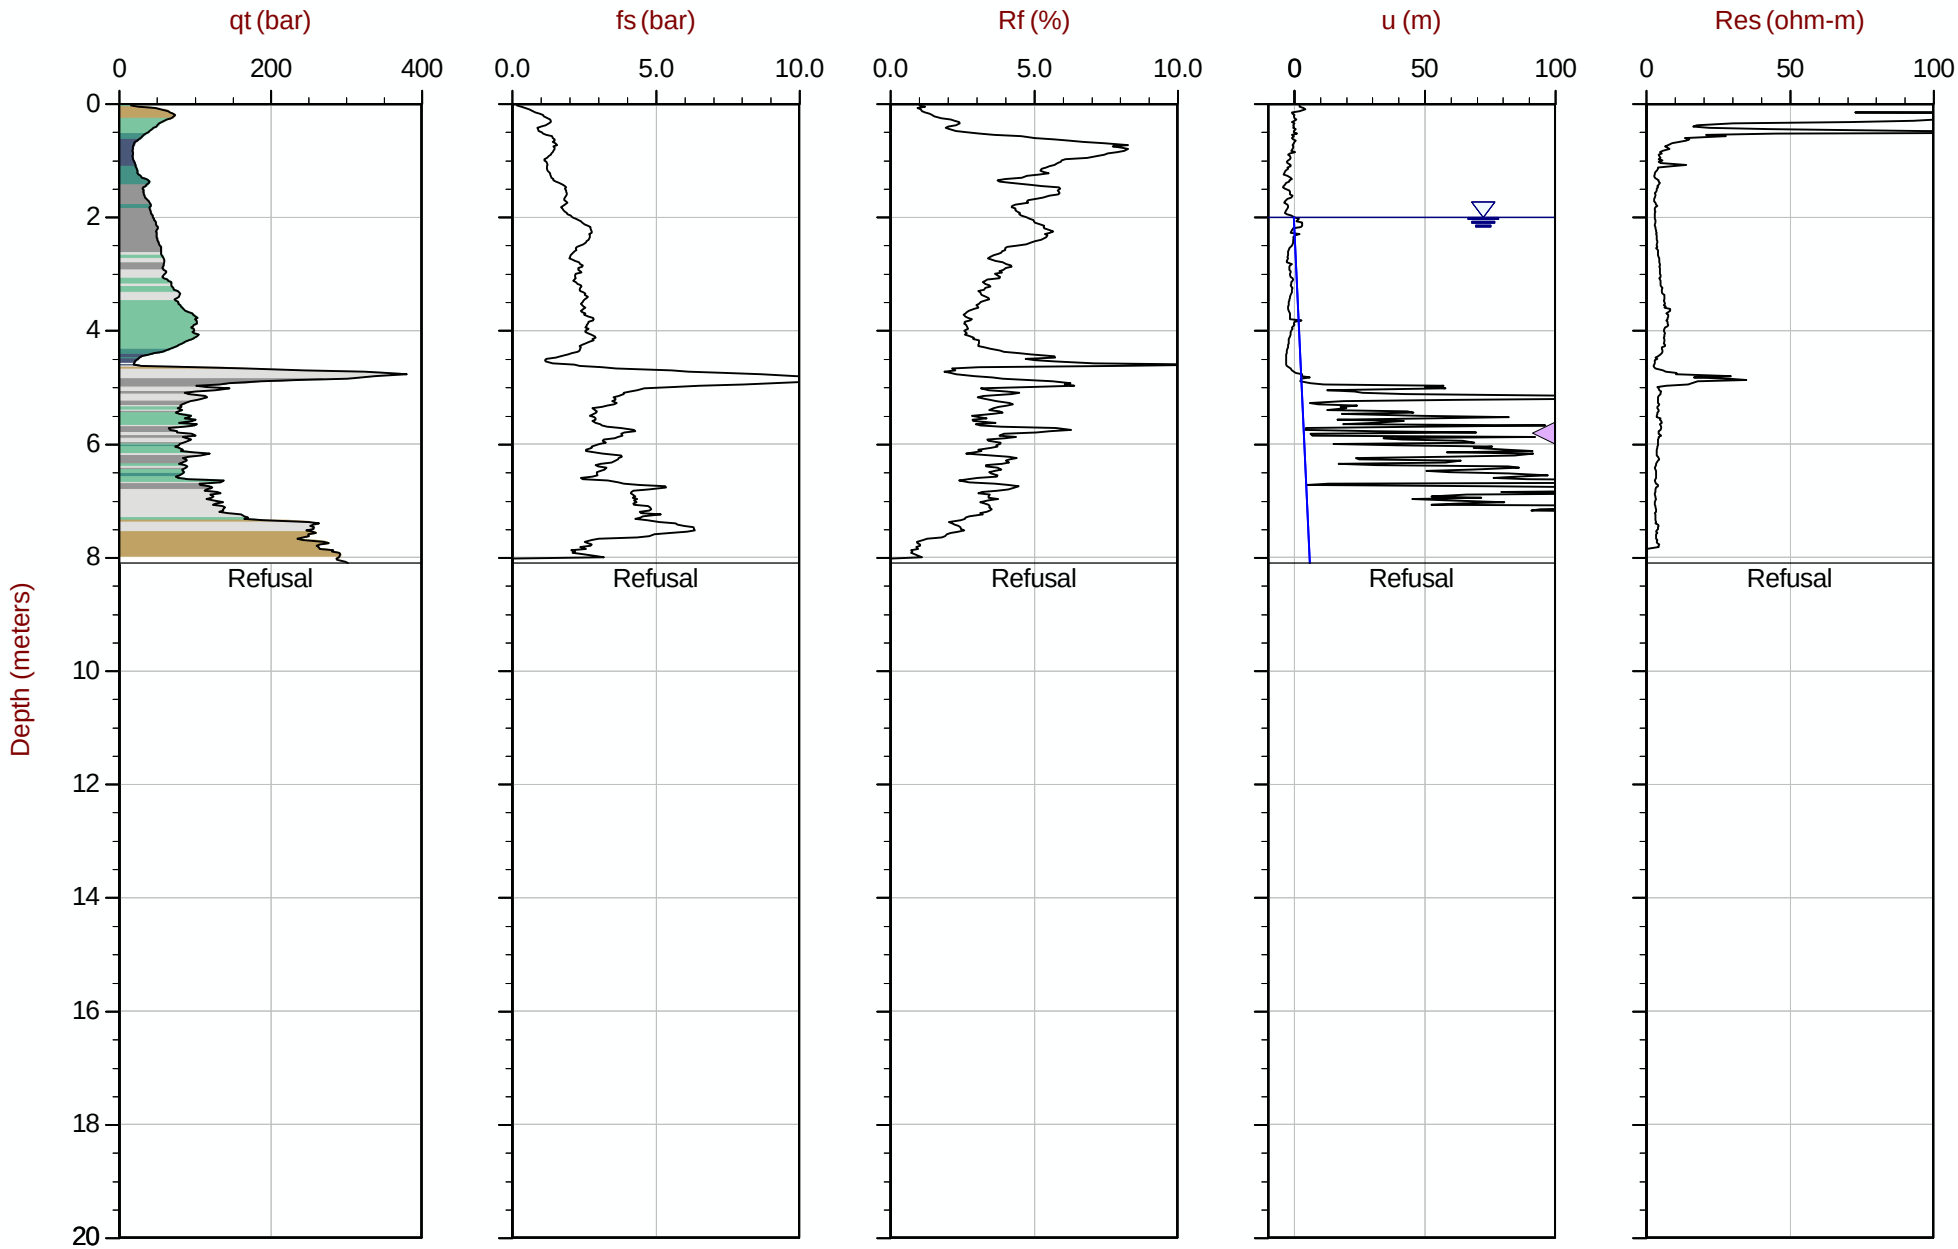

Max Depth: 8.100 m / 26.57 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT352.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609431m E: 415611m Elev: 773.677m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 14:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353
Cone: 854:T1500F15U35 Area= 15cm2

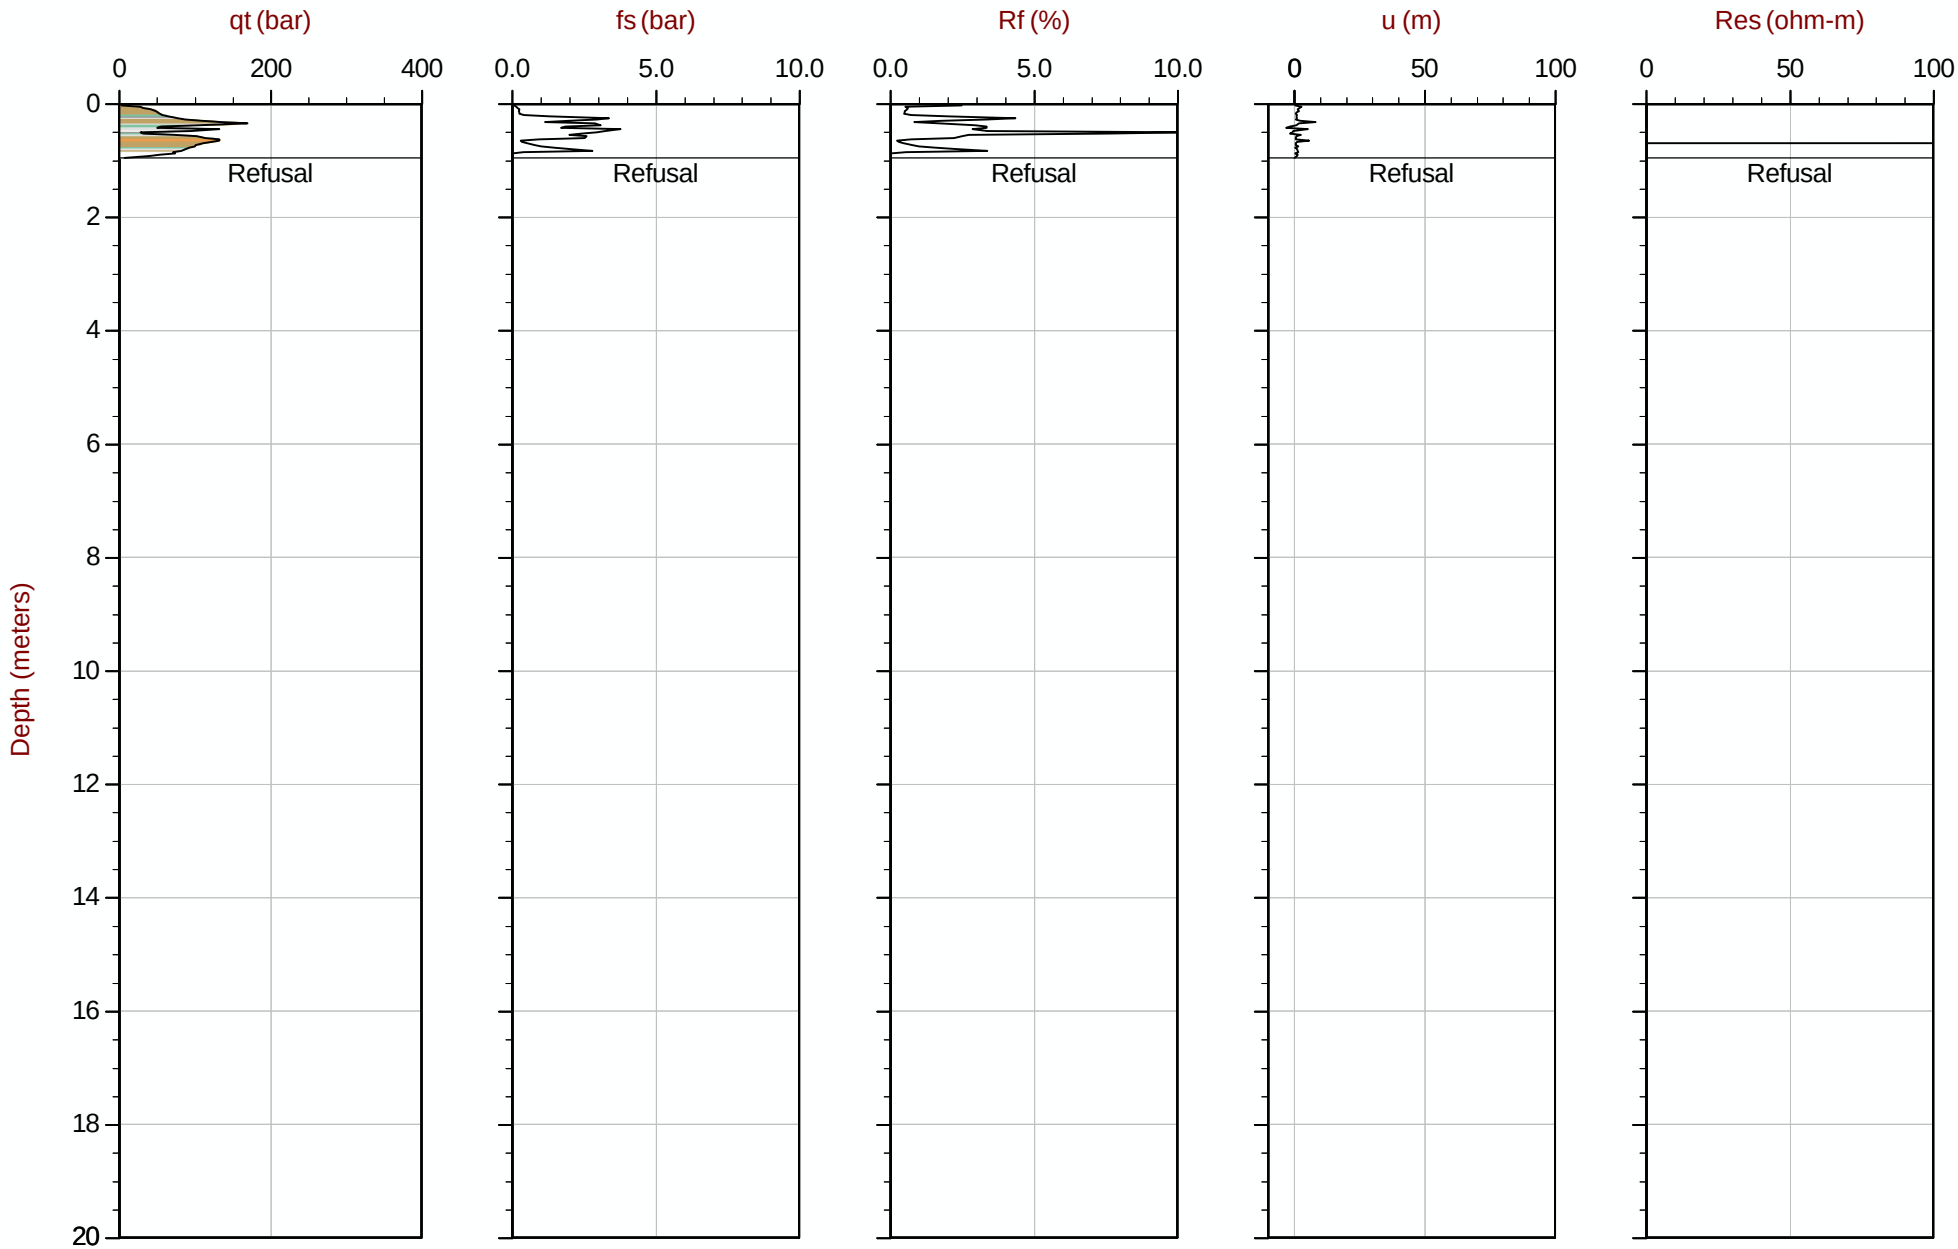

Max Depth: 0.950 m / 3.12 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT353.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609429m E: 415511m Elev: 774.095m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 15:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353B
Cone: 854:T1500F15U35 Area= 15cm2

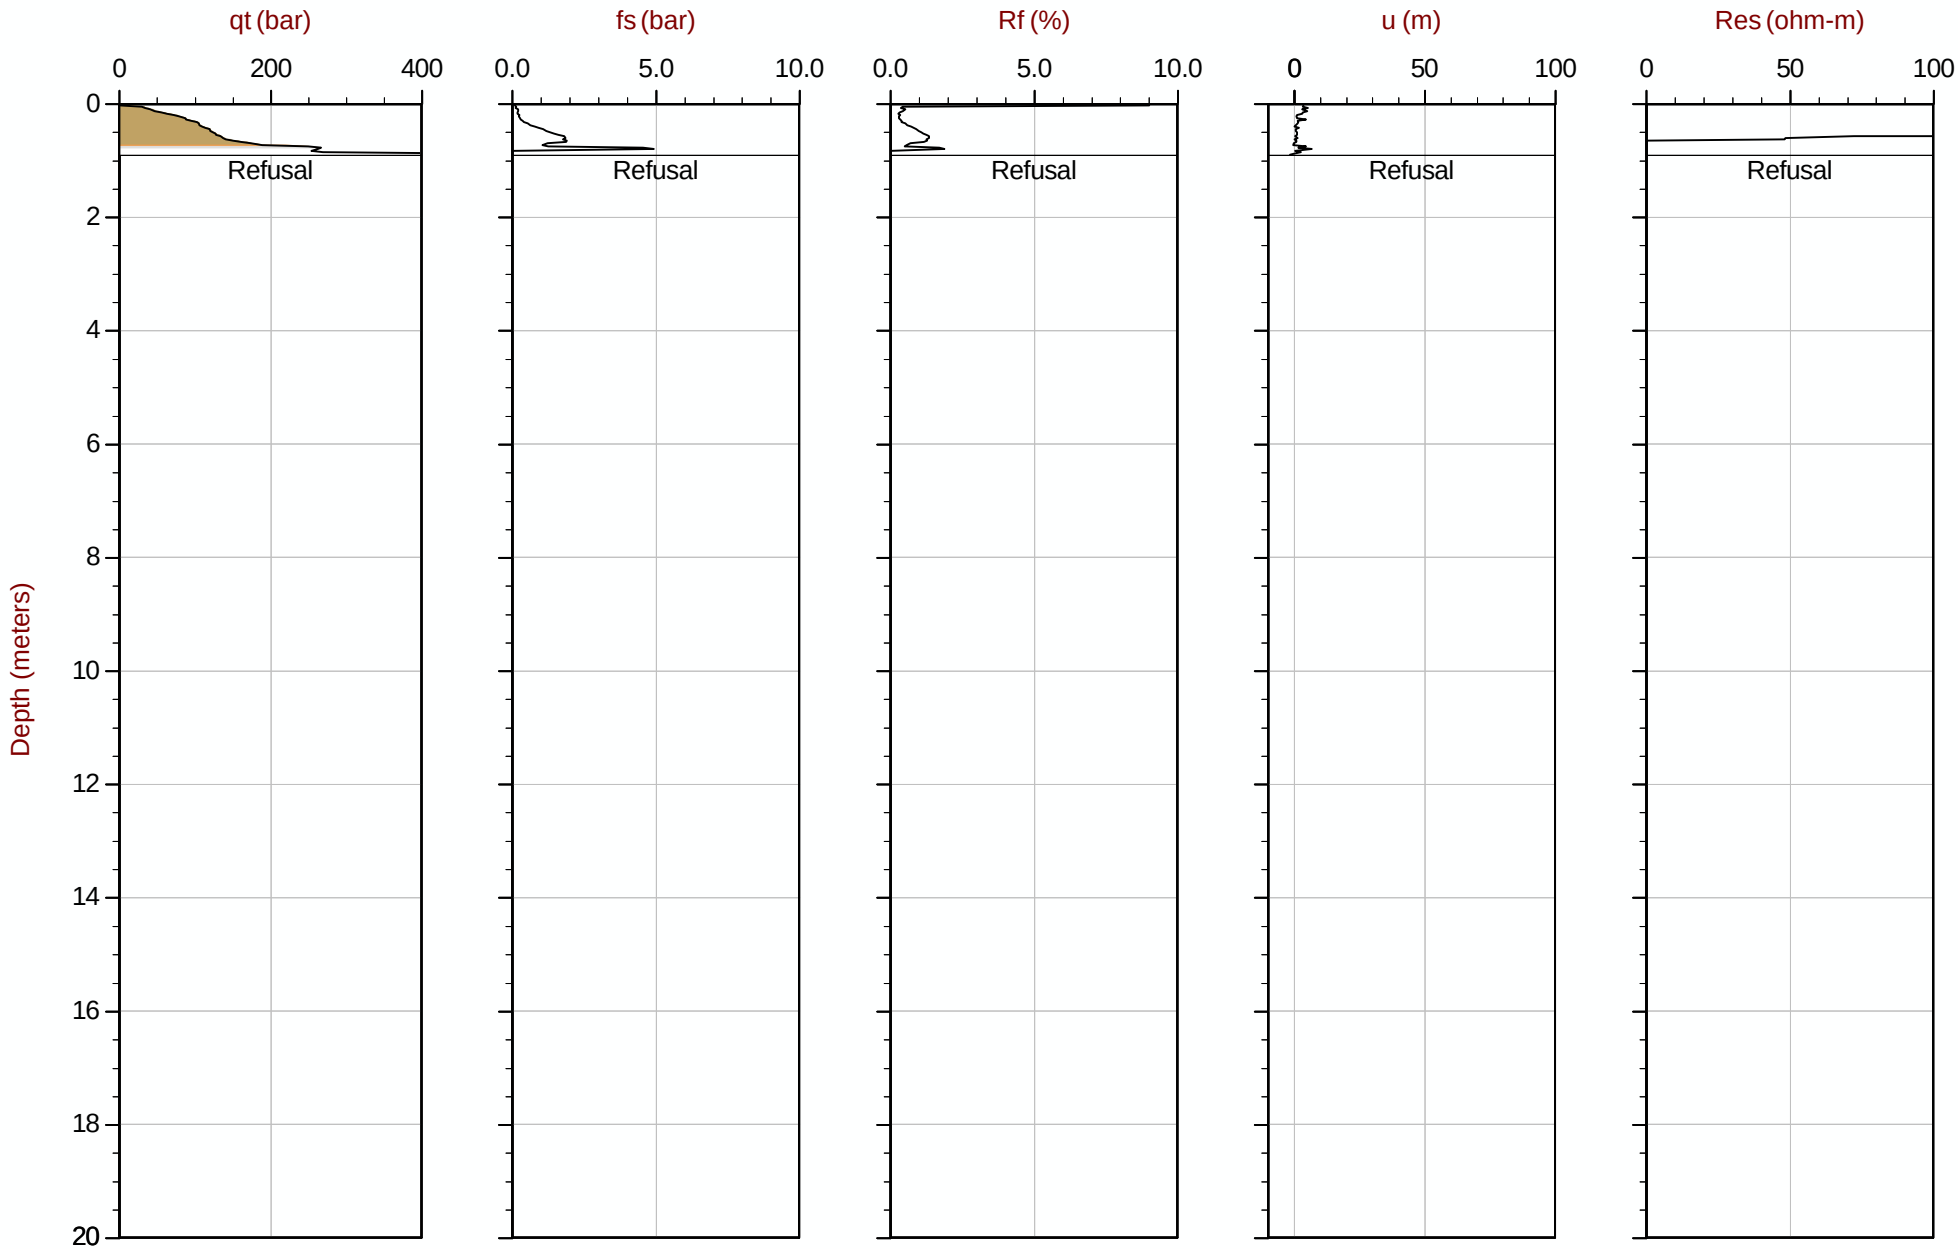

Max Depth: 0.900 m / 2.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT353B.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609427m E: 415511m Elev: 774.100m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 15:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353C
Cone: 854:T1500F15U35 Area= 15cm2

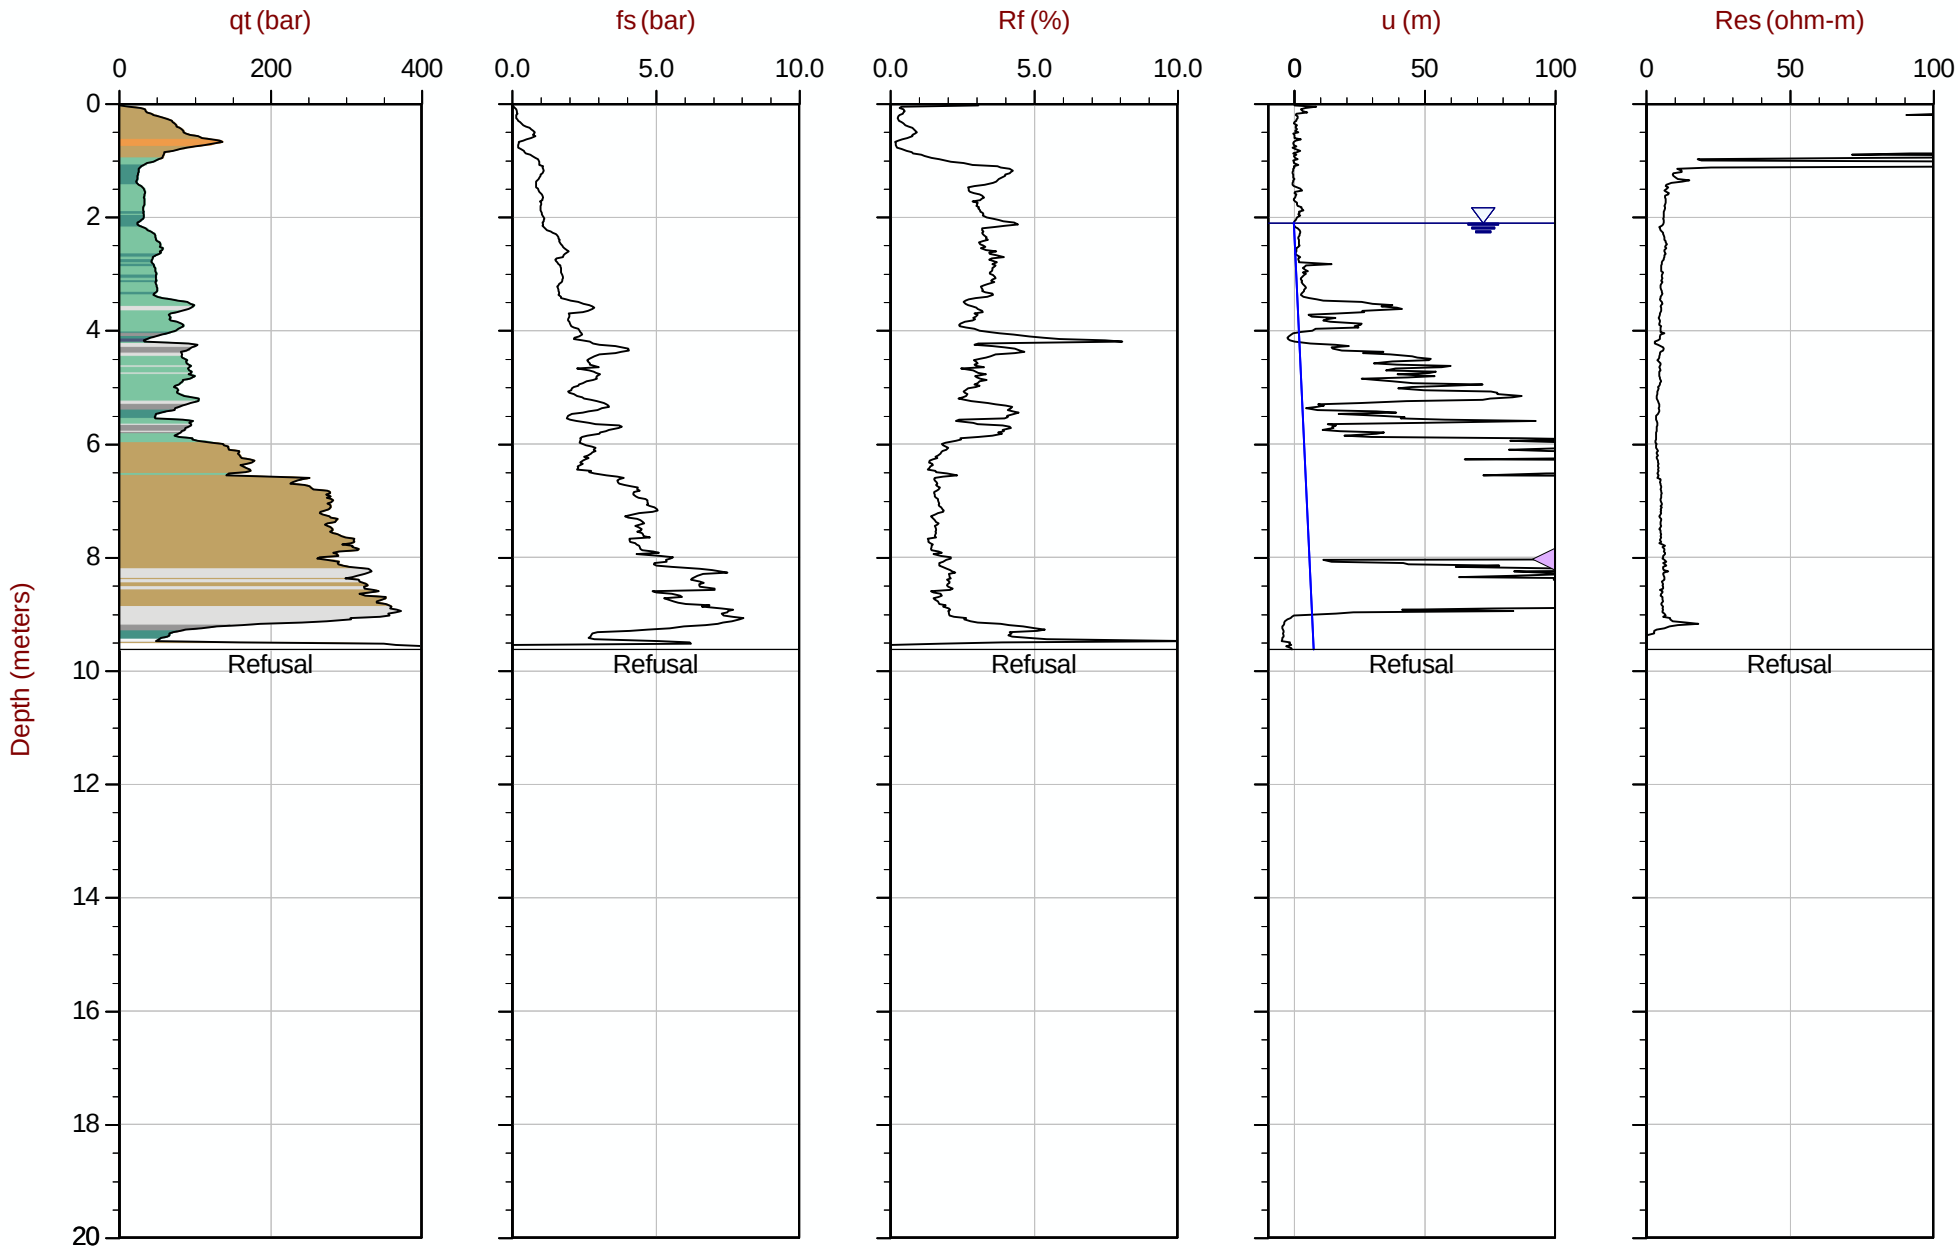

Max Depth: 9.625 m / 31.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT353C.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609425m E: 415511m Elev: 774.000m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 08:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT354
Cone: 854:T1500F15U35 Area= 15cm2

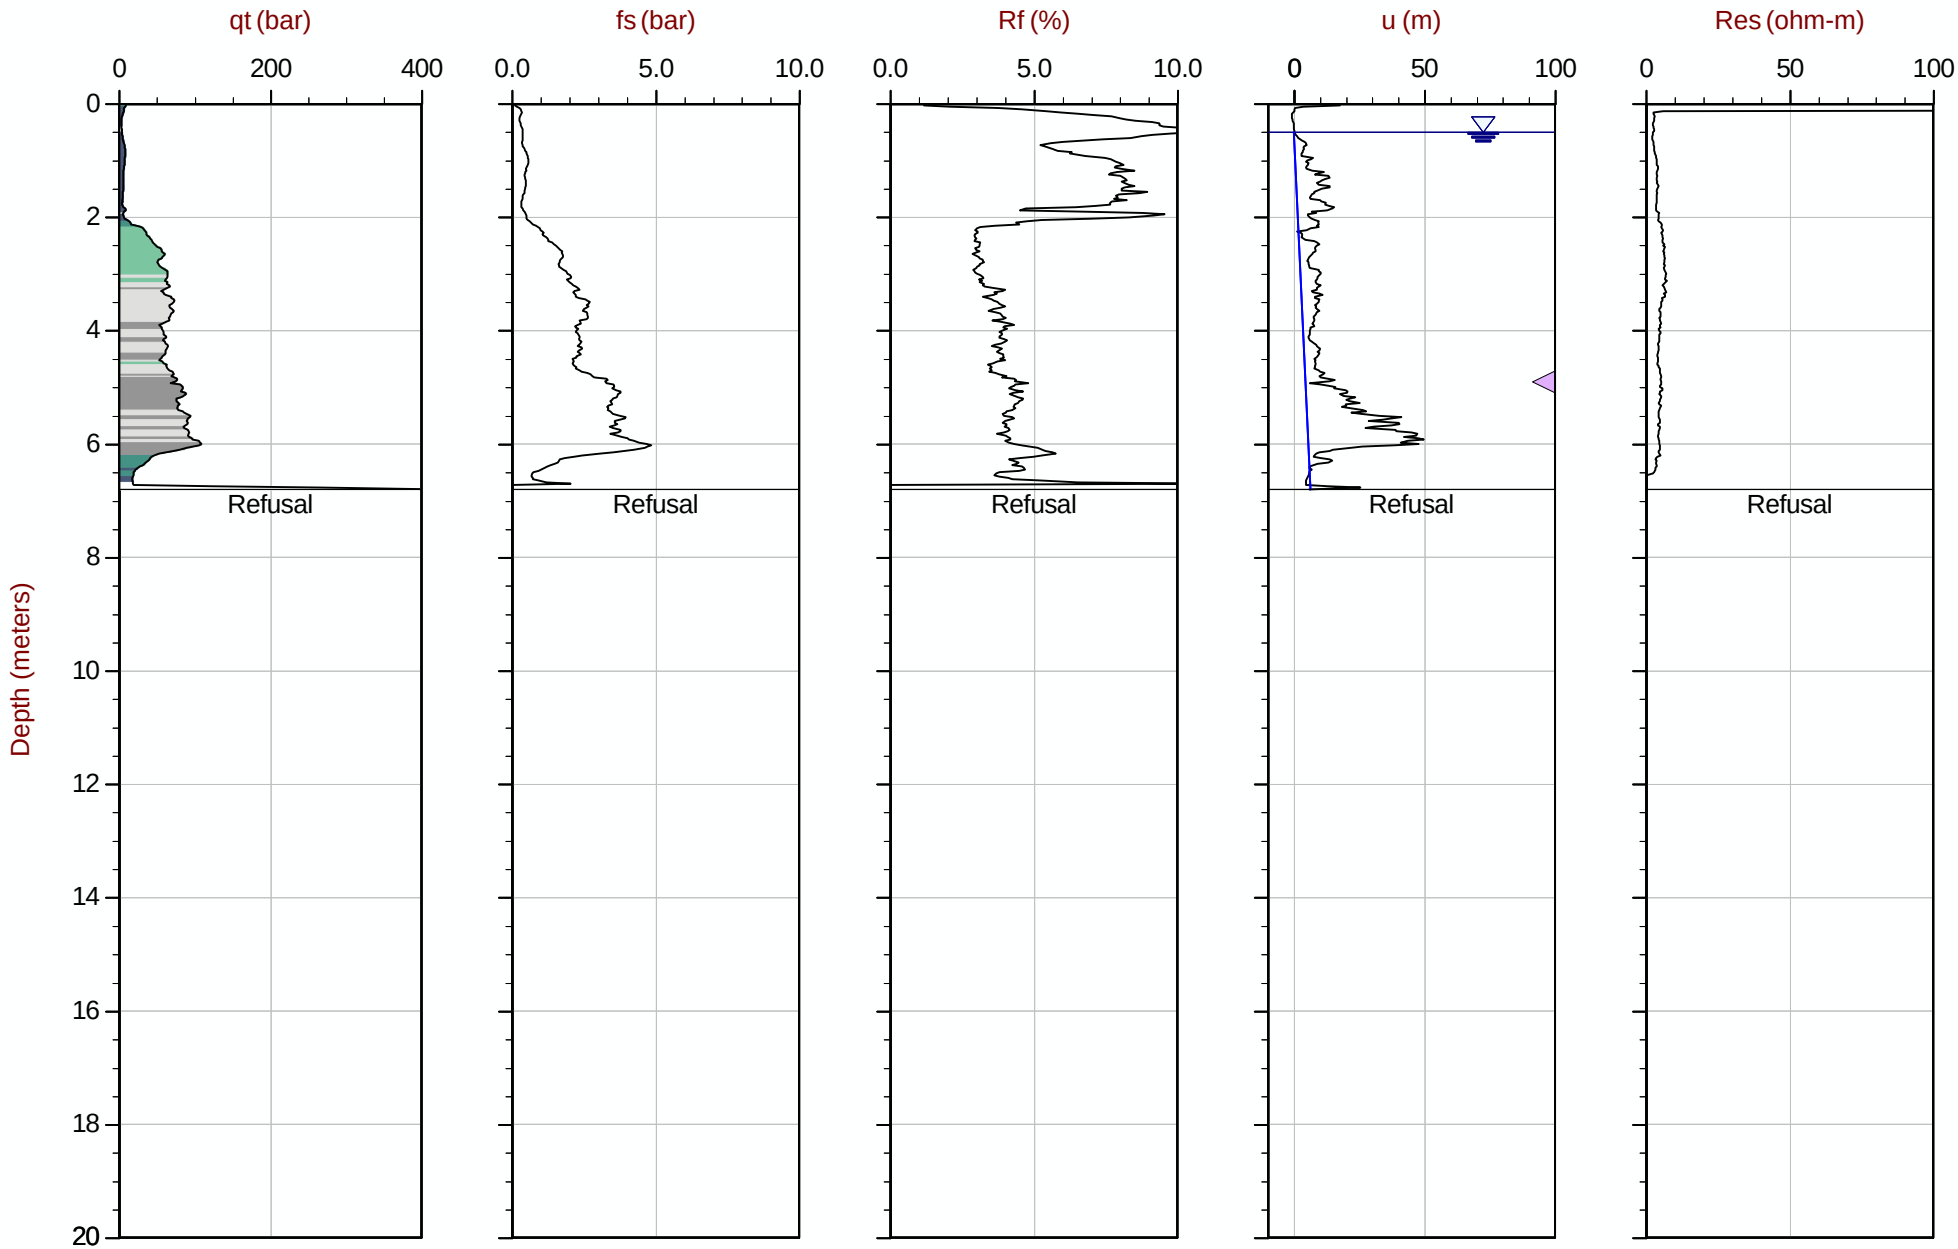

Max Depth: 6.800 m / 22.31 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT354.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 415411m Elev: 774.082m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 11:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT355
Cone: 854:T1500F15U35 Area= 15cm2

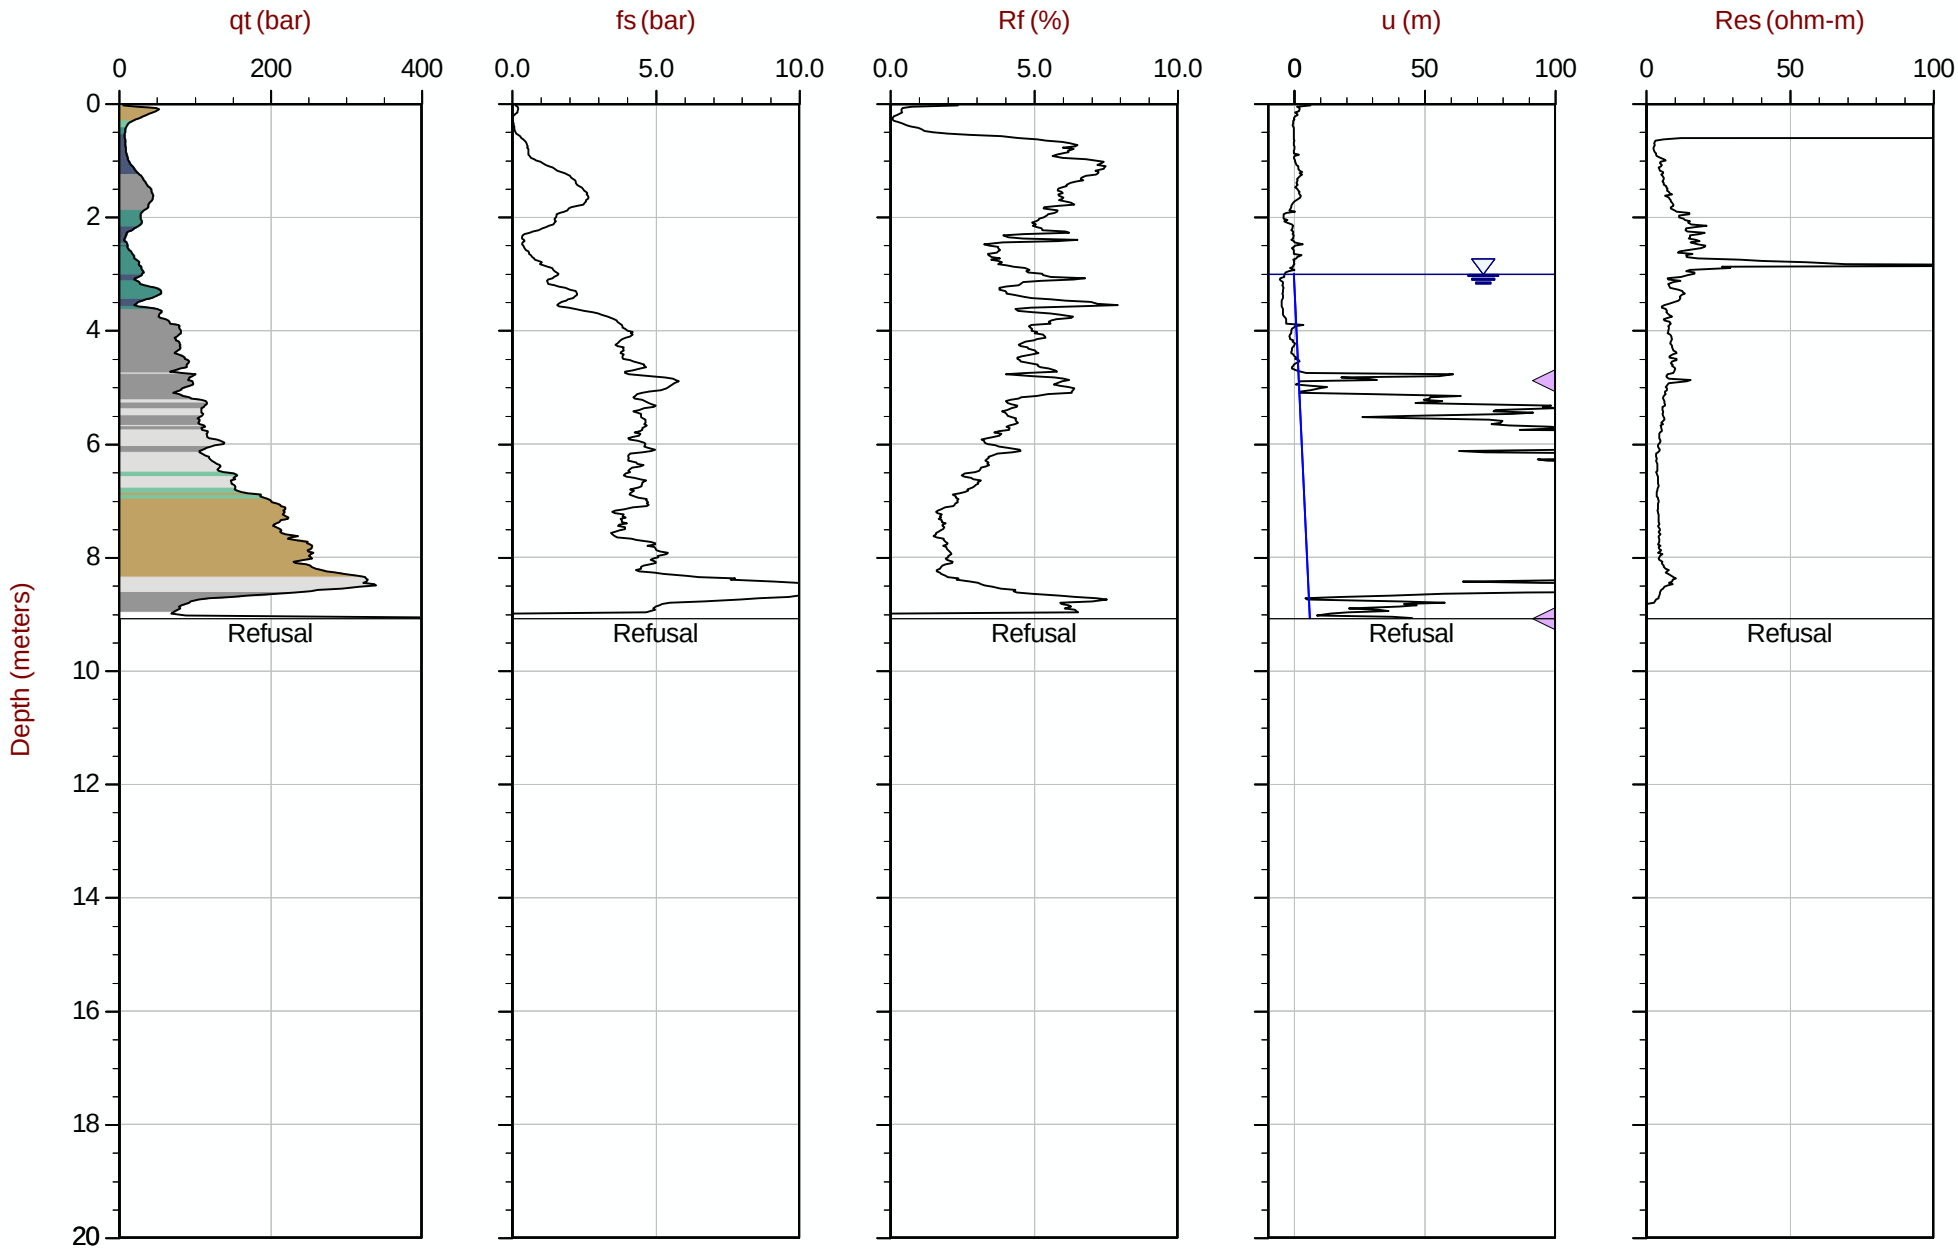

Max Depth: 9.075 m / 29.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT355.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 415311m Elev: 775.422m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 15:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT356
Cone: 854:T1500F15U35 Area= 15cm2

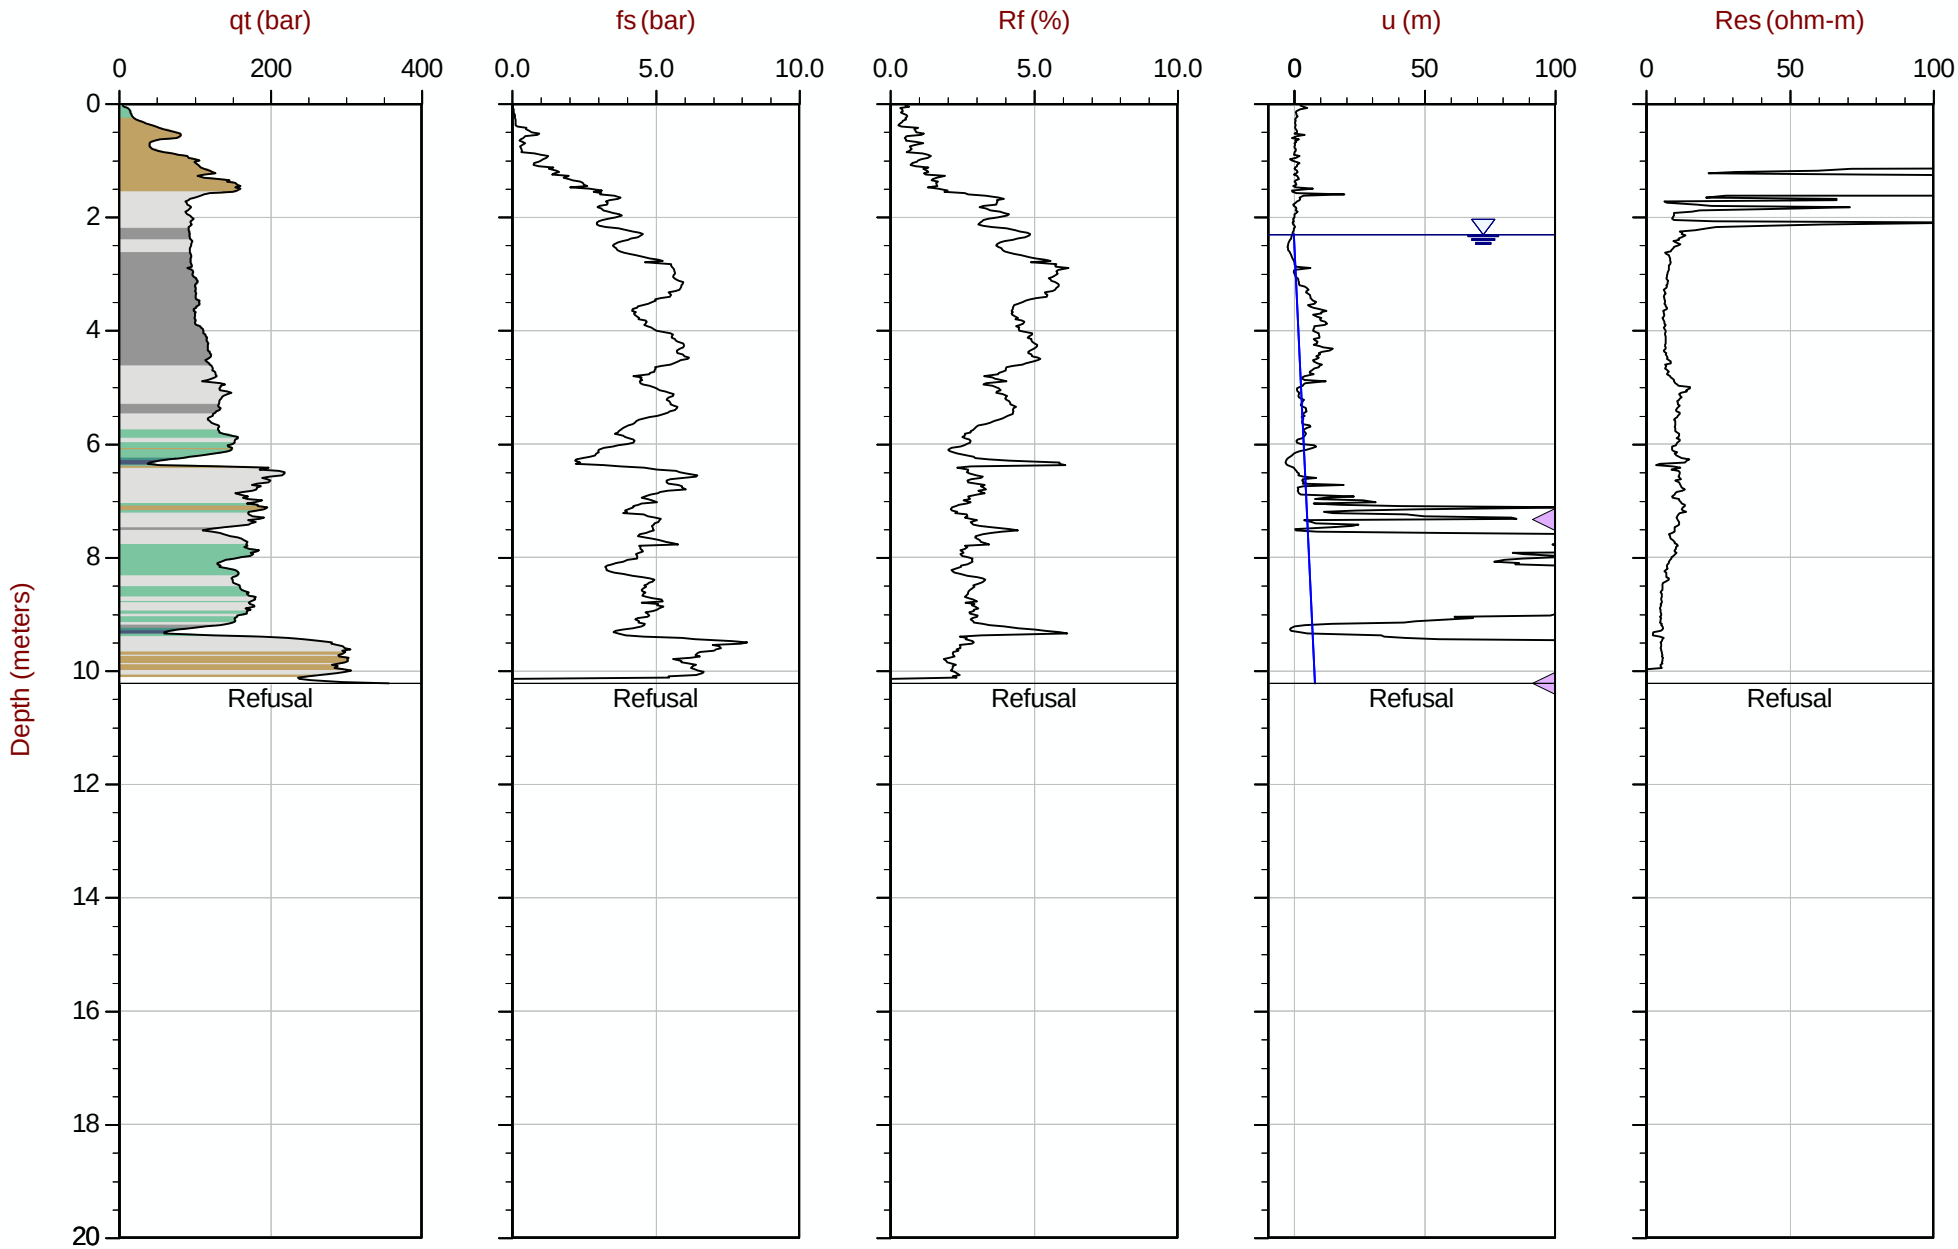

Max Depth: 10.225 m / 33.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT356.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 415211m Elev: 778.741m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 09:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT357
Cone: 854:T1500F15U35 Area= 15cm2

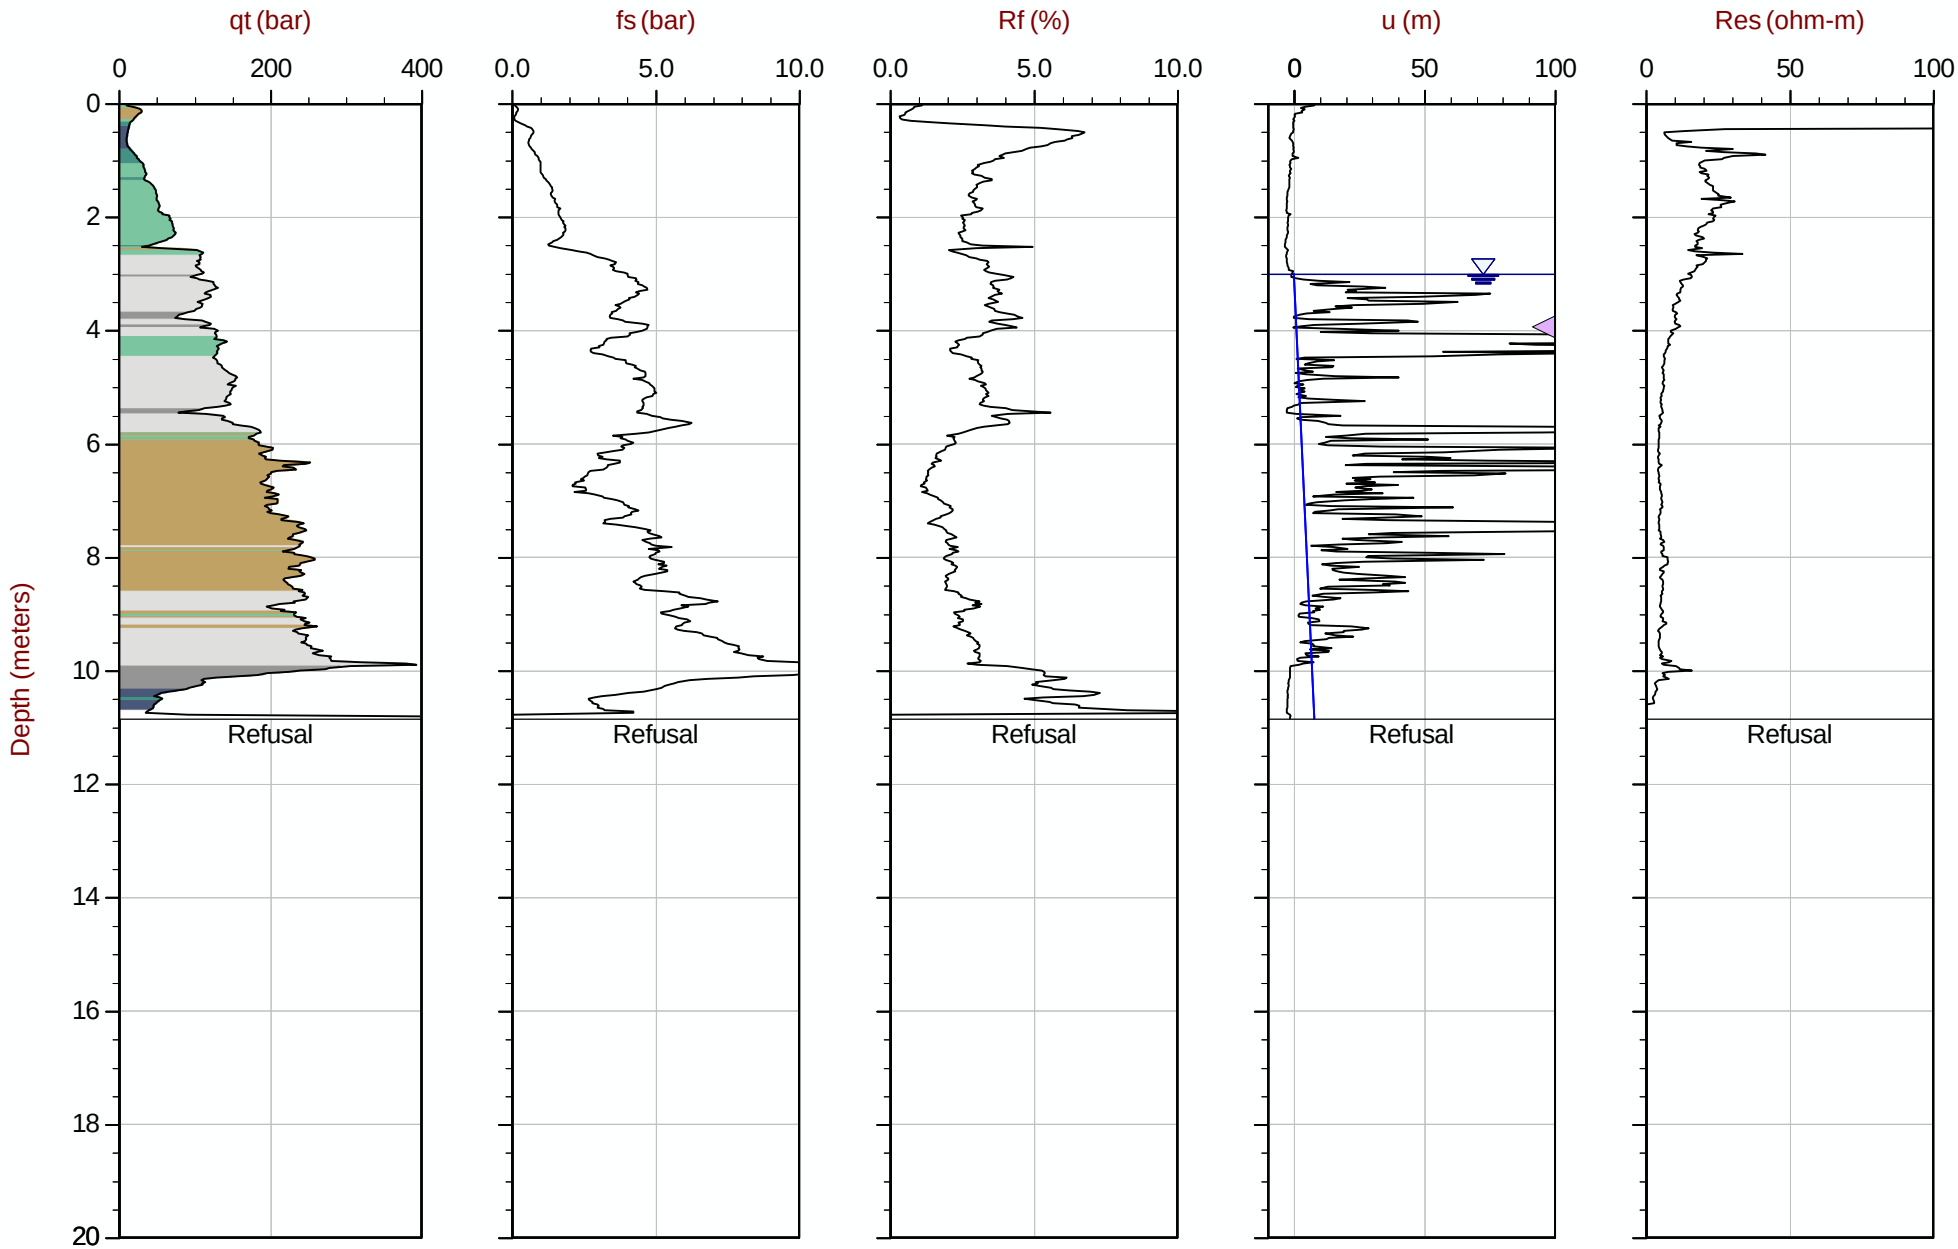

Max Depth: 10.850 m / 35.60 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT357.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 415113m Elev: 776.000m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 11:42
Site: Brooks, Alberta

Sounding: RCPT22-22CPT358
Cone: 750:T1500F15U35 Area= 15cm2

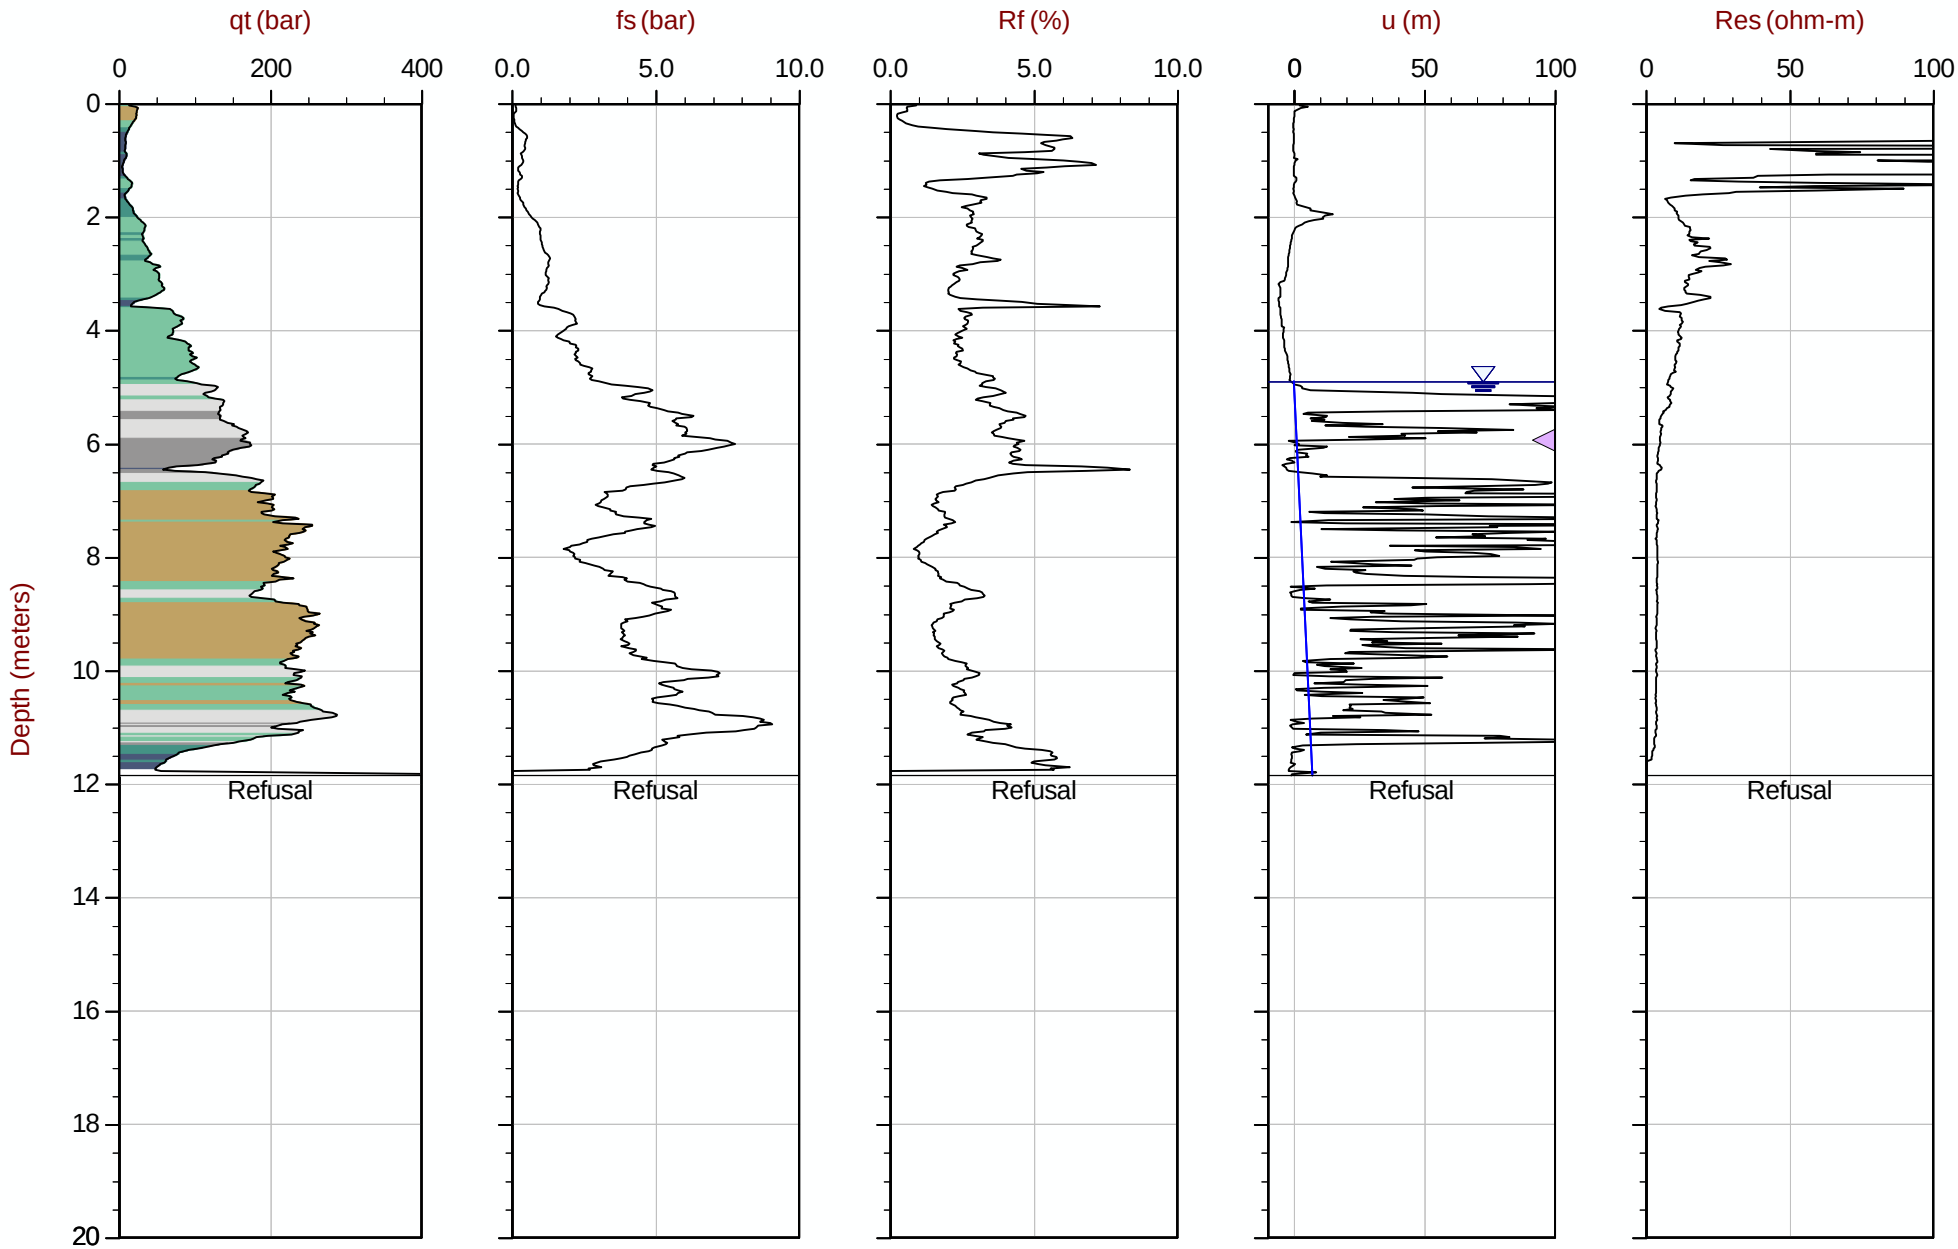

Max Depth: 11.850 m / 38.88 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT358.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609425m E: 415011m Elev: 776.048m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 15:39
Site: Brooks, Alberta

Sounding: RCPT22-22CPT359
Cone: 821:T1000F10U35 Area= 15cm2

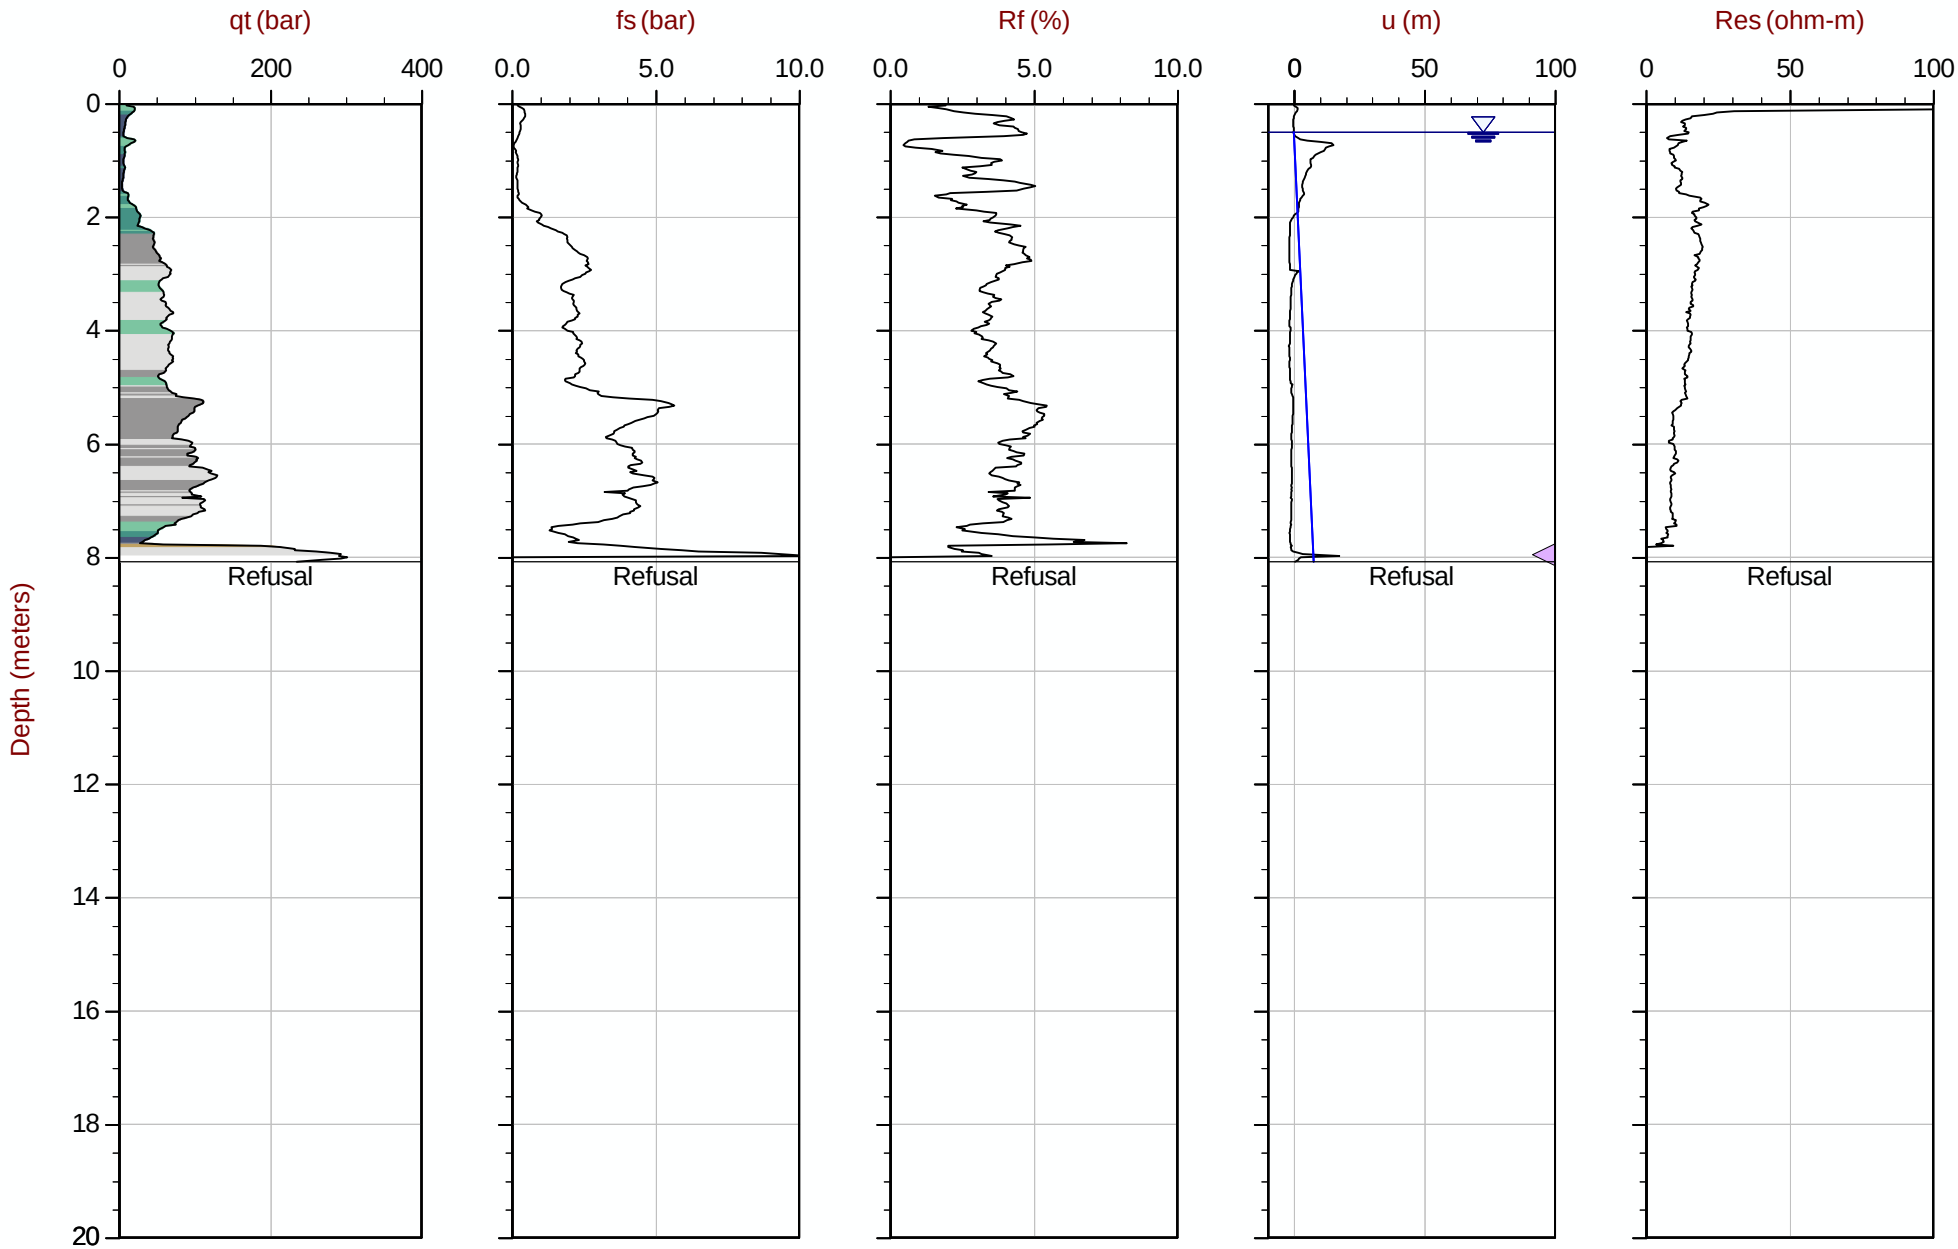

Max Depth: 8.075 m / 26.49 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT359.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 414911m Elev: 776.614m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 07:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT360
Cone: 821:T1000F10U35 Area= 15cm2

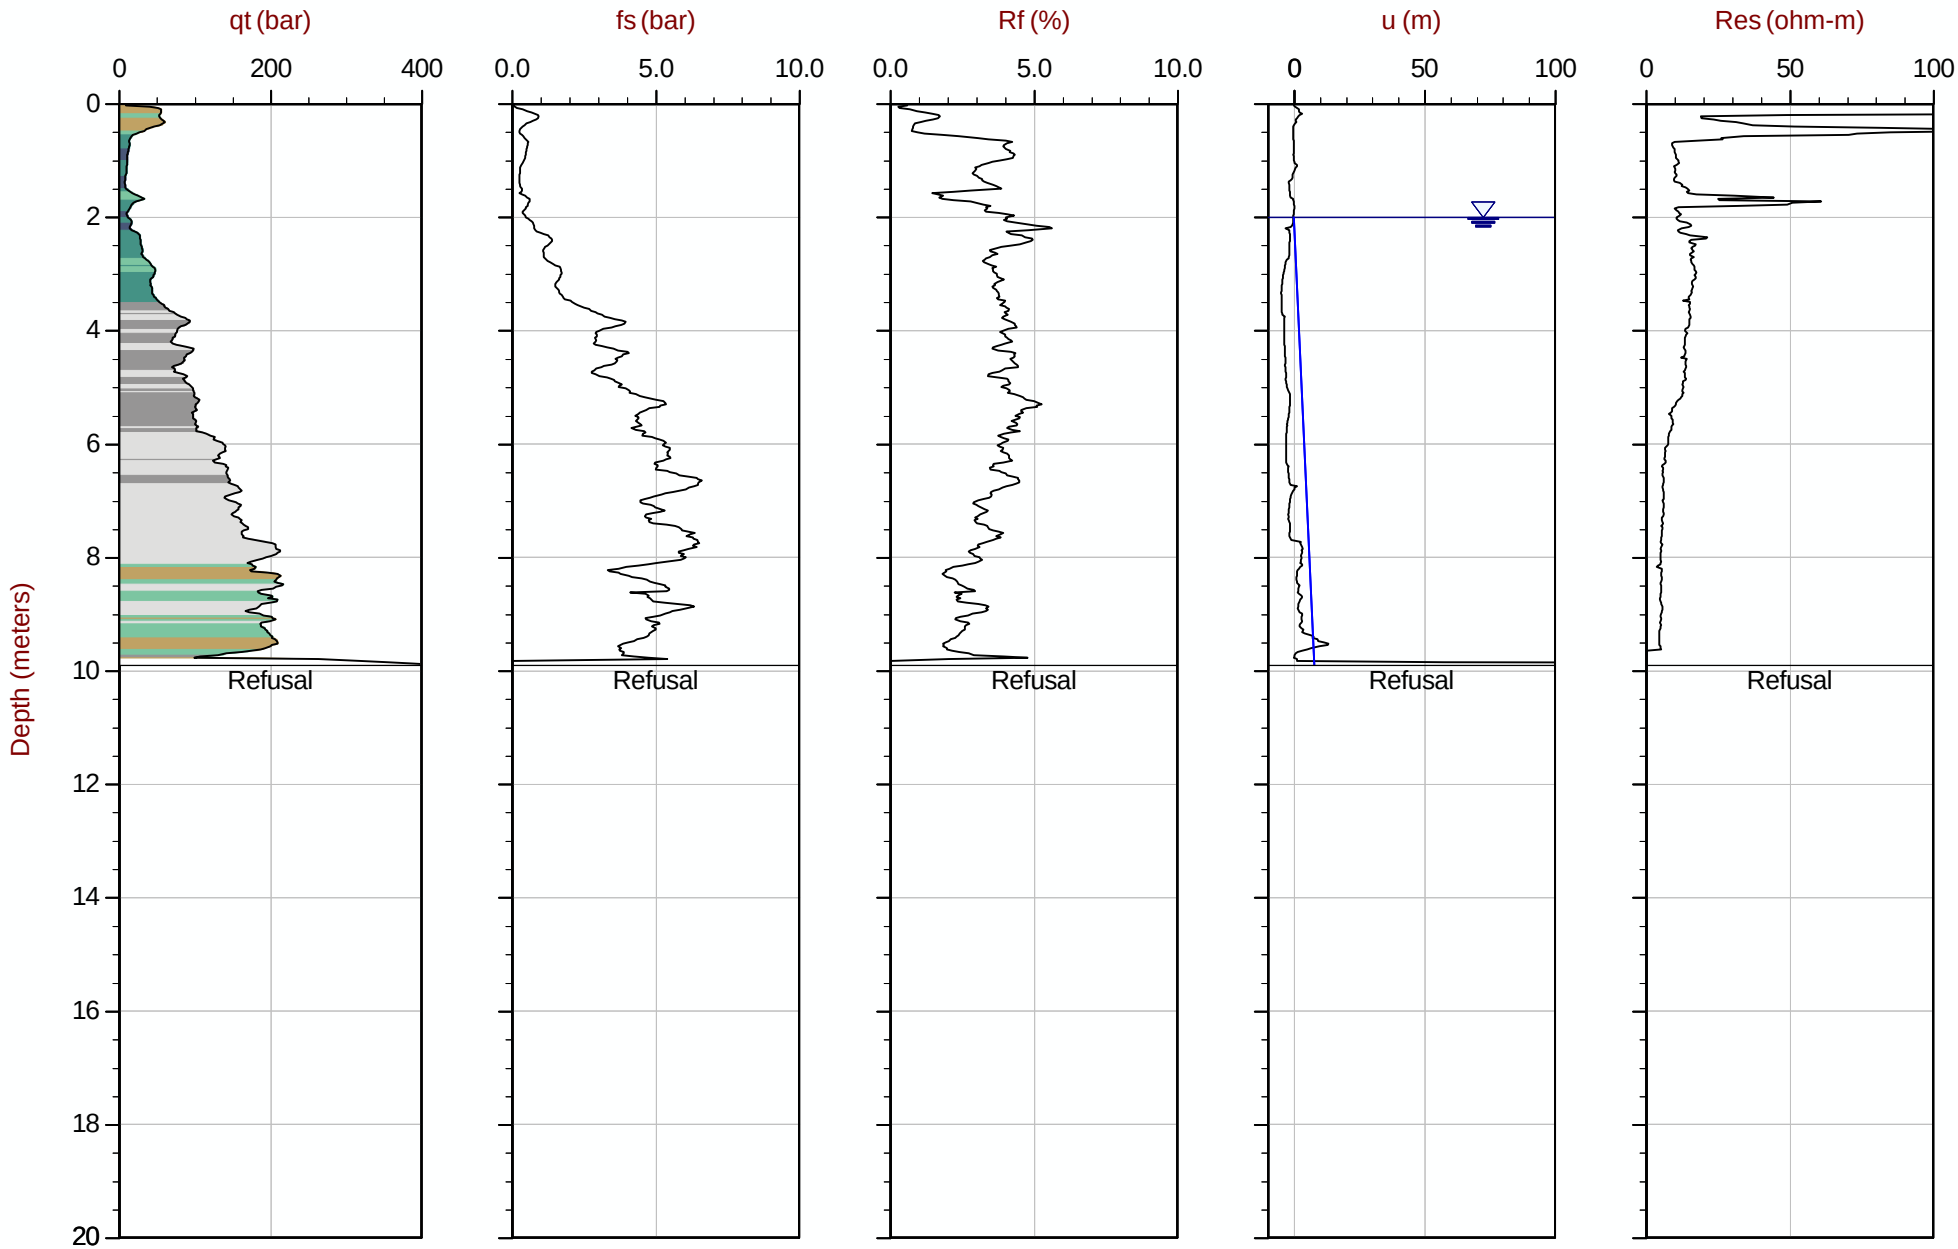

Max Depth: 9.900 m / 32.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT360.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609431m E: 414811m Elev: 778.729m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT166
Cone: 750:T1500F15U35 Area= 15cm2

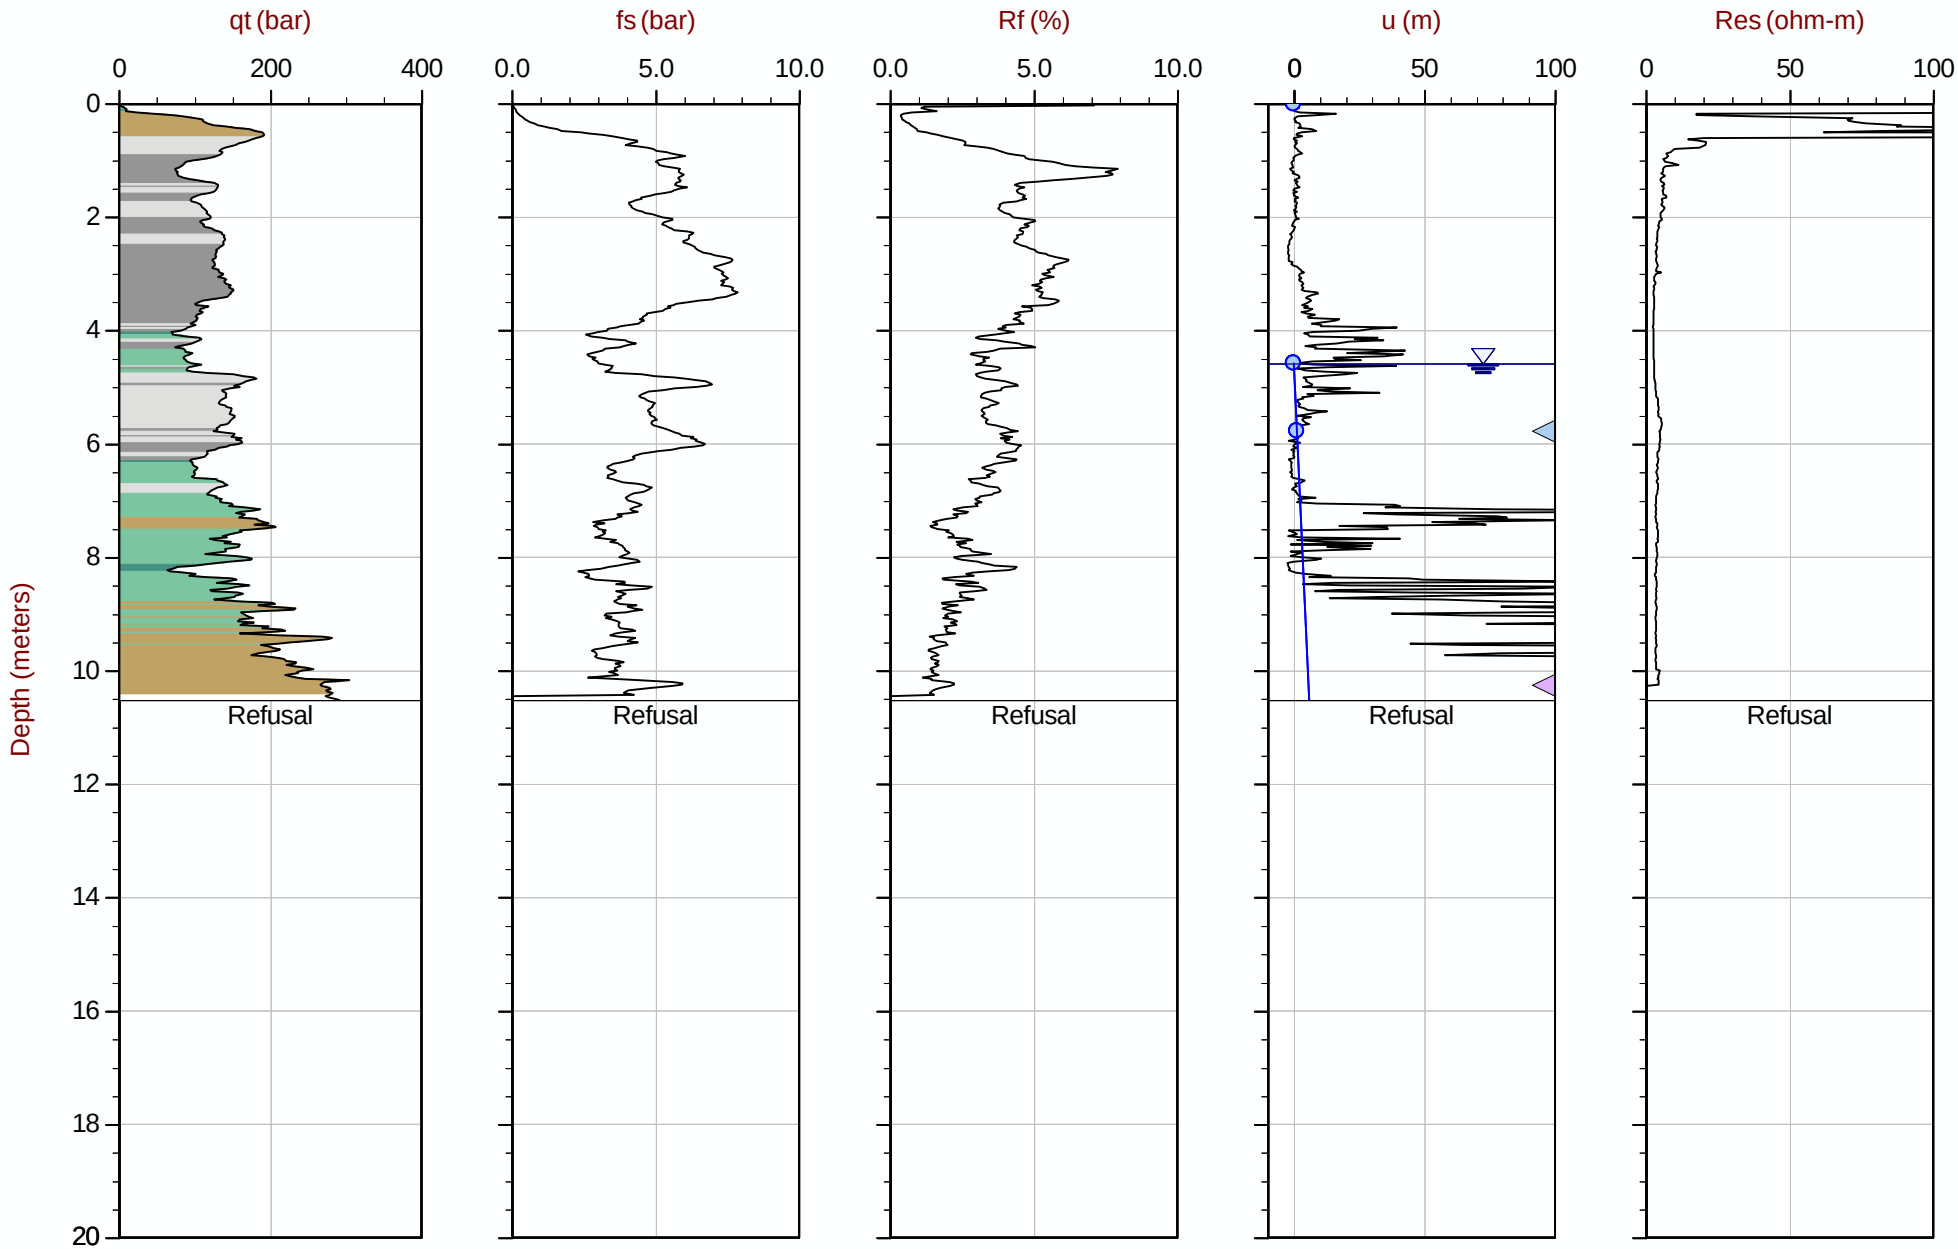

Max Depth: 10.525 m / 34.53 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT166.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612572m E: 416208m Elev: N/Am
Sheet No: 1 of 1

Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

Advanced Cone Penetration Plots with Ic, Su(Nkt) and N1(60)lc


CONETEC

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 09:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT100
Cone: 750:T1500F15U35 Area= 15cm2

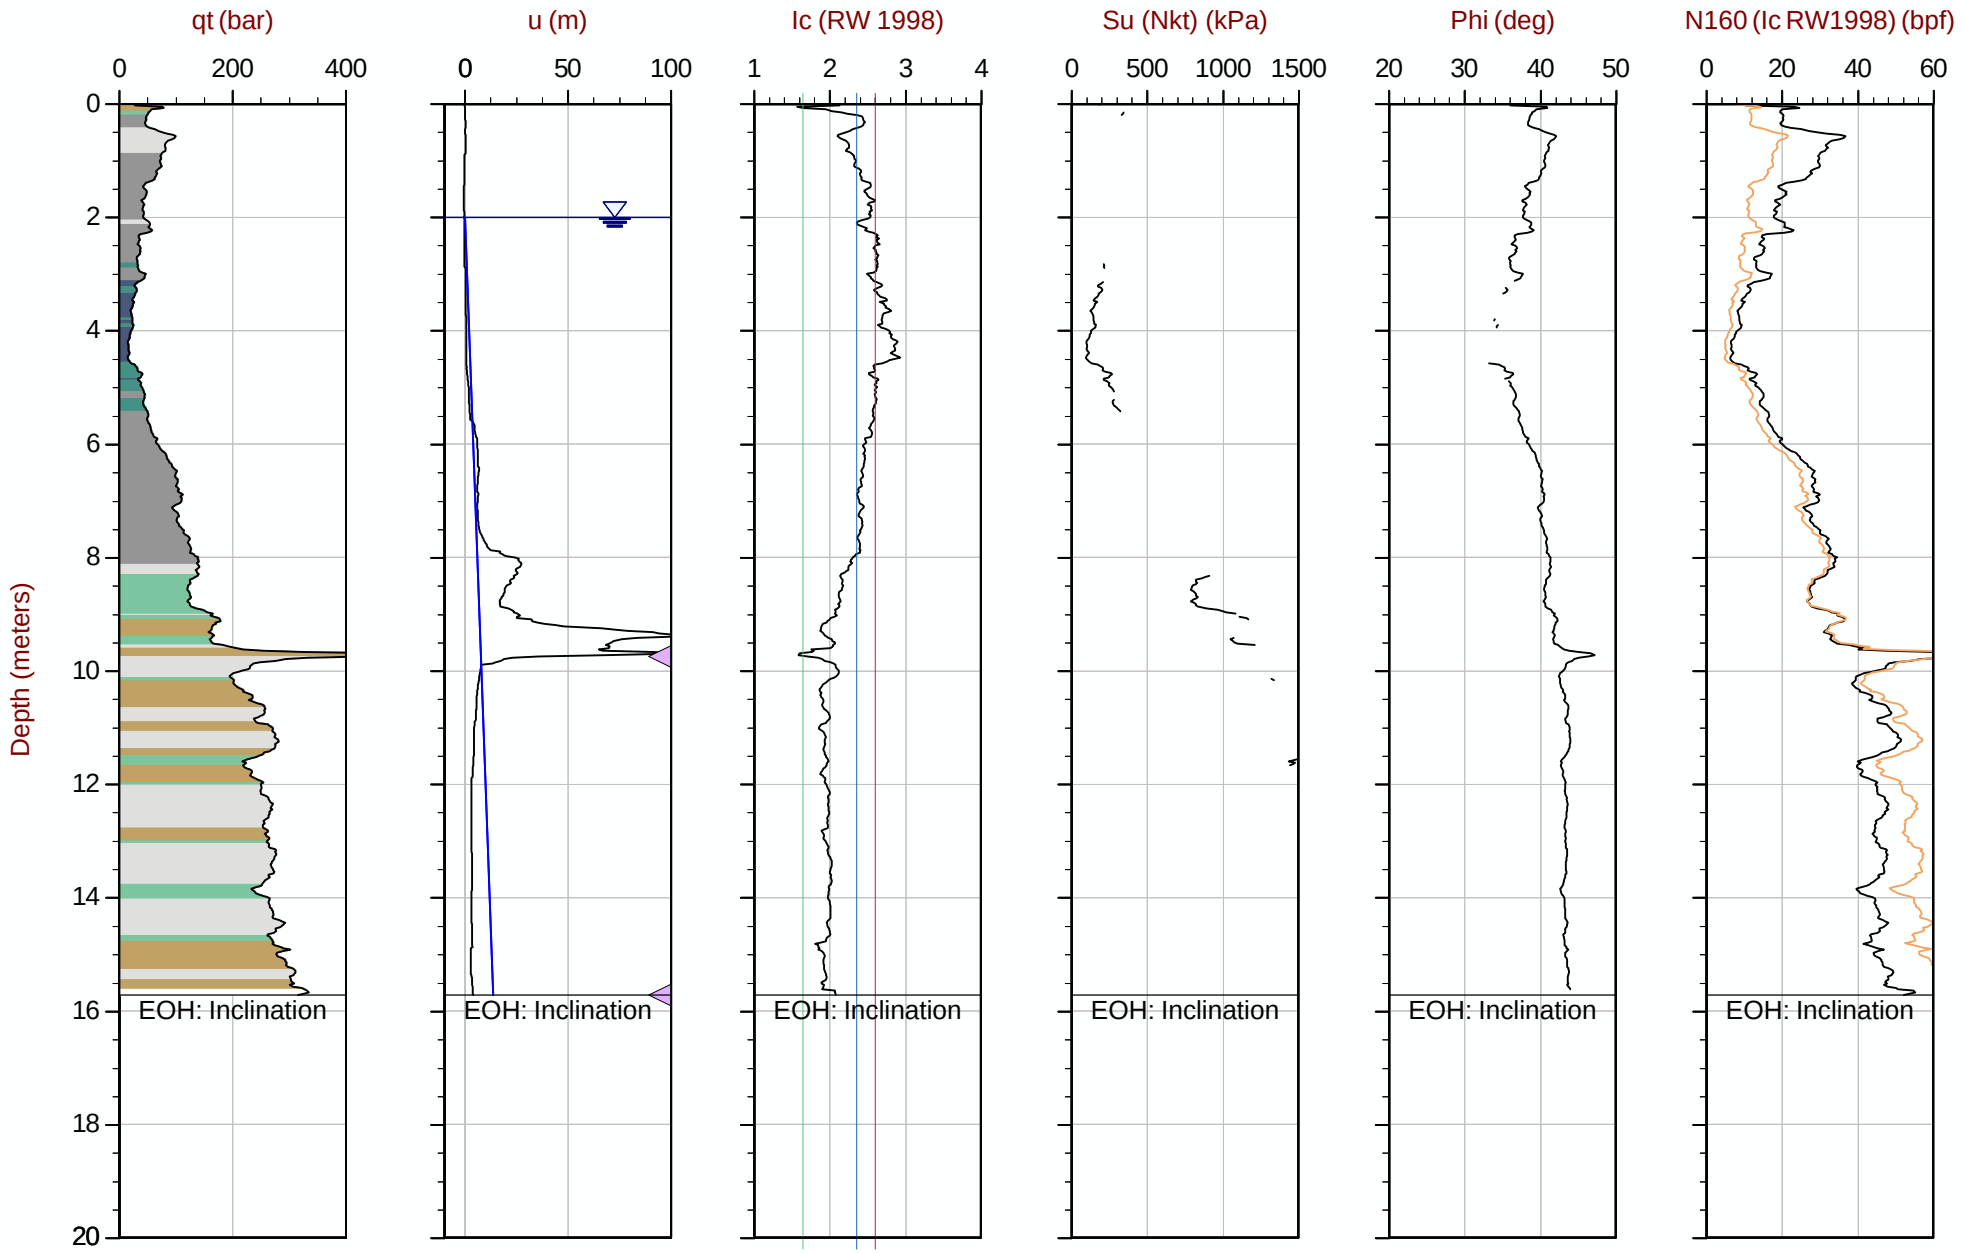

Max Depth: 15.725 m / 51.59 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT100.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612602m E: 413774m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 11:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT101
Cone: 750:T1500F15U35 Area= 15cm2

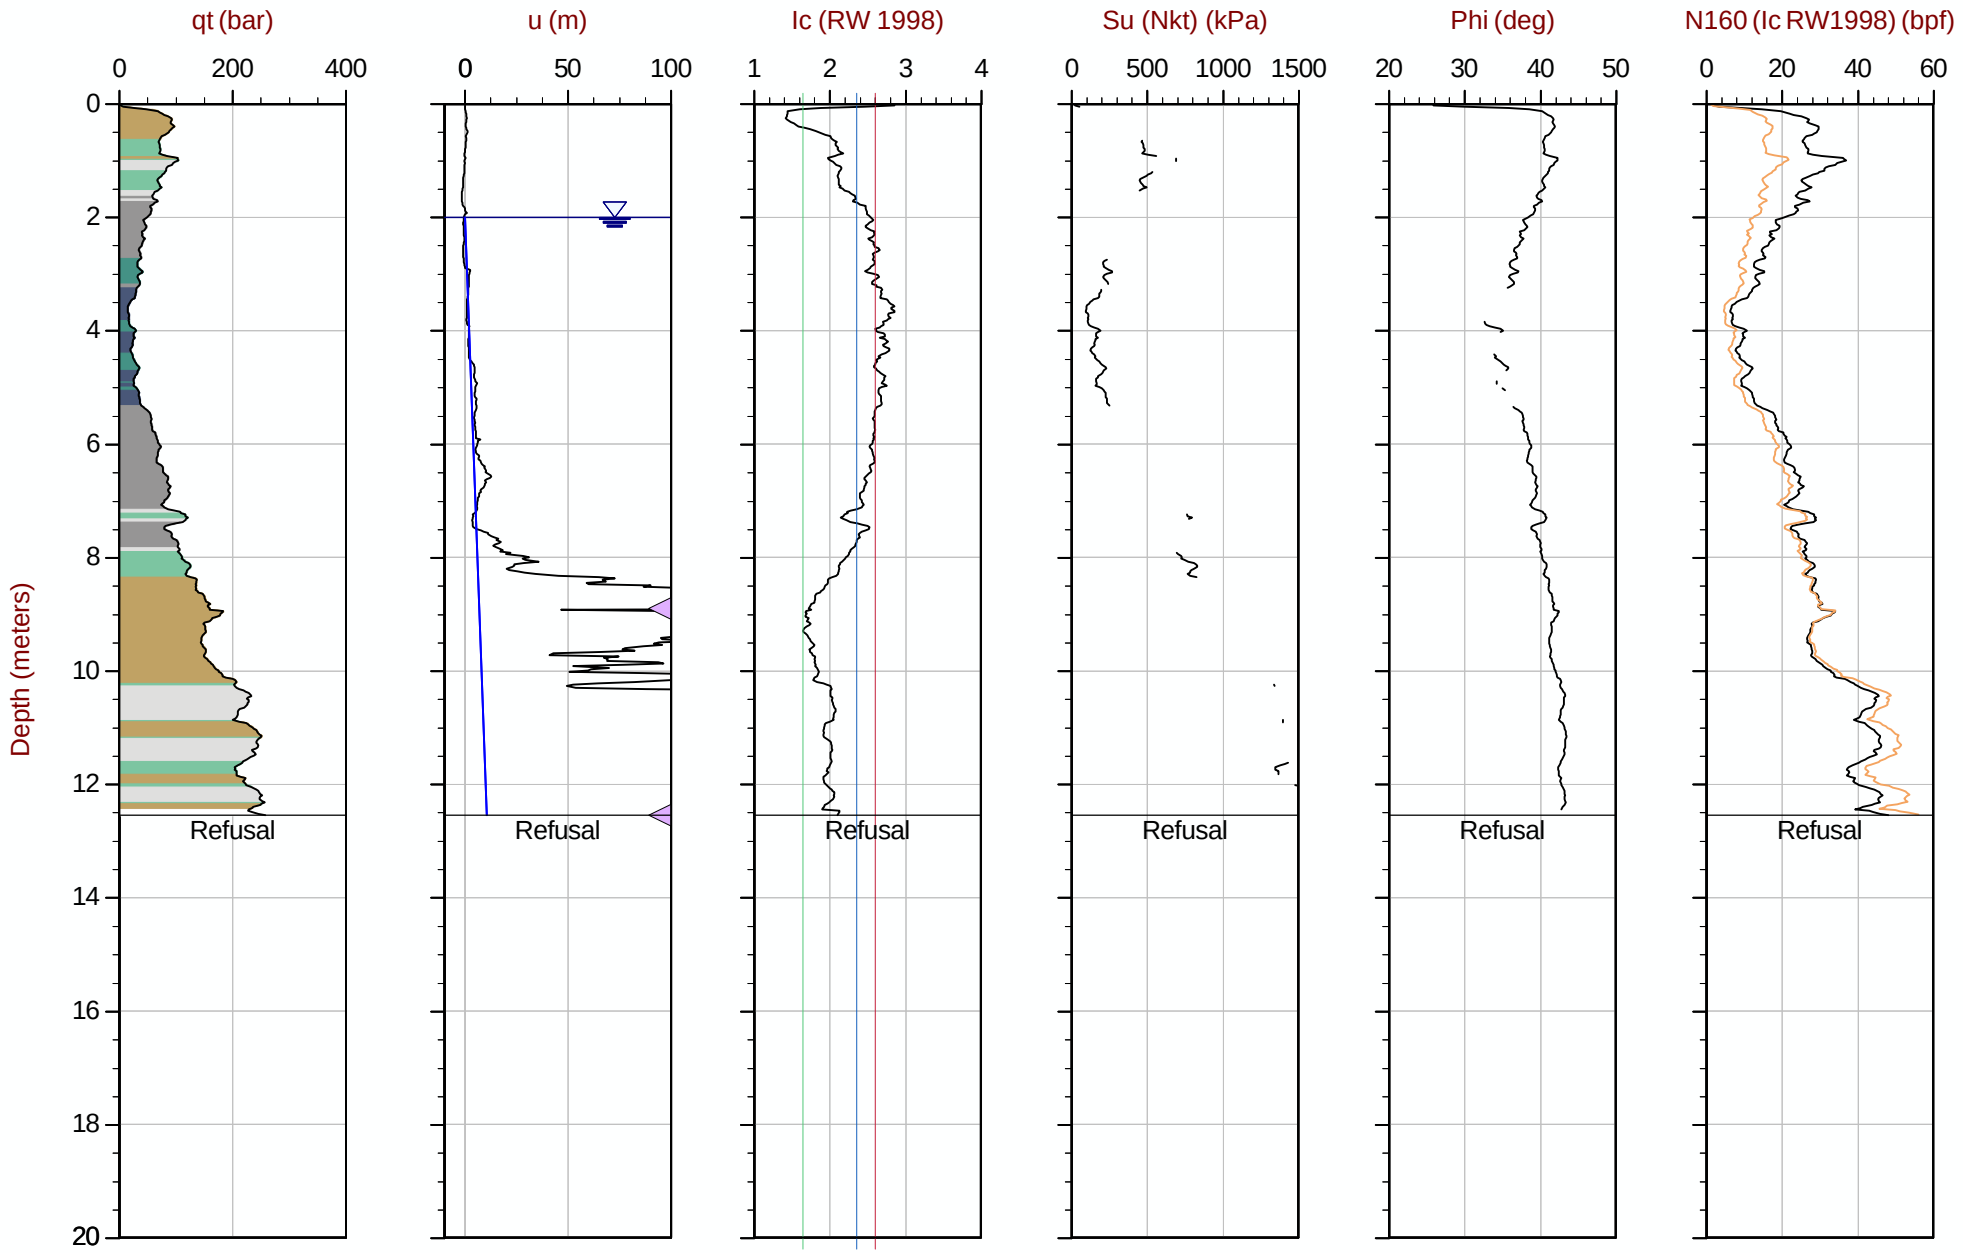

Max Depth: 12.550 m / 41.17 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT101.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612601m E: 413873m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 13:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT102
Cone: 651:T1500F15U35 Area= 15cm2

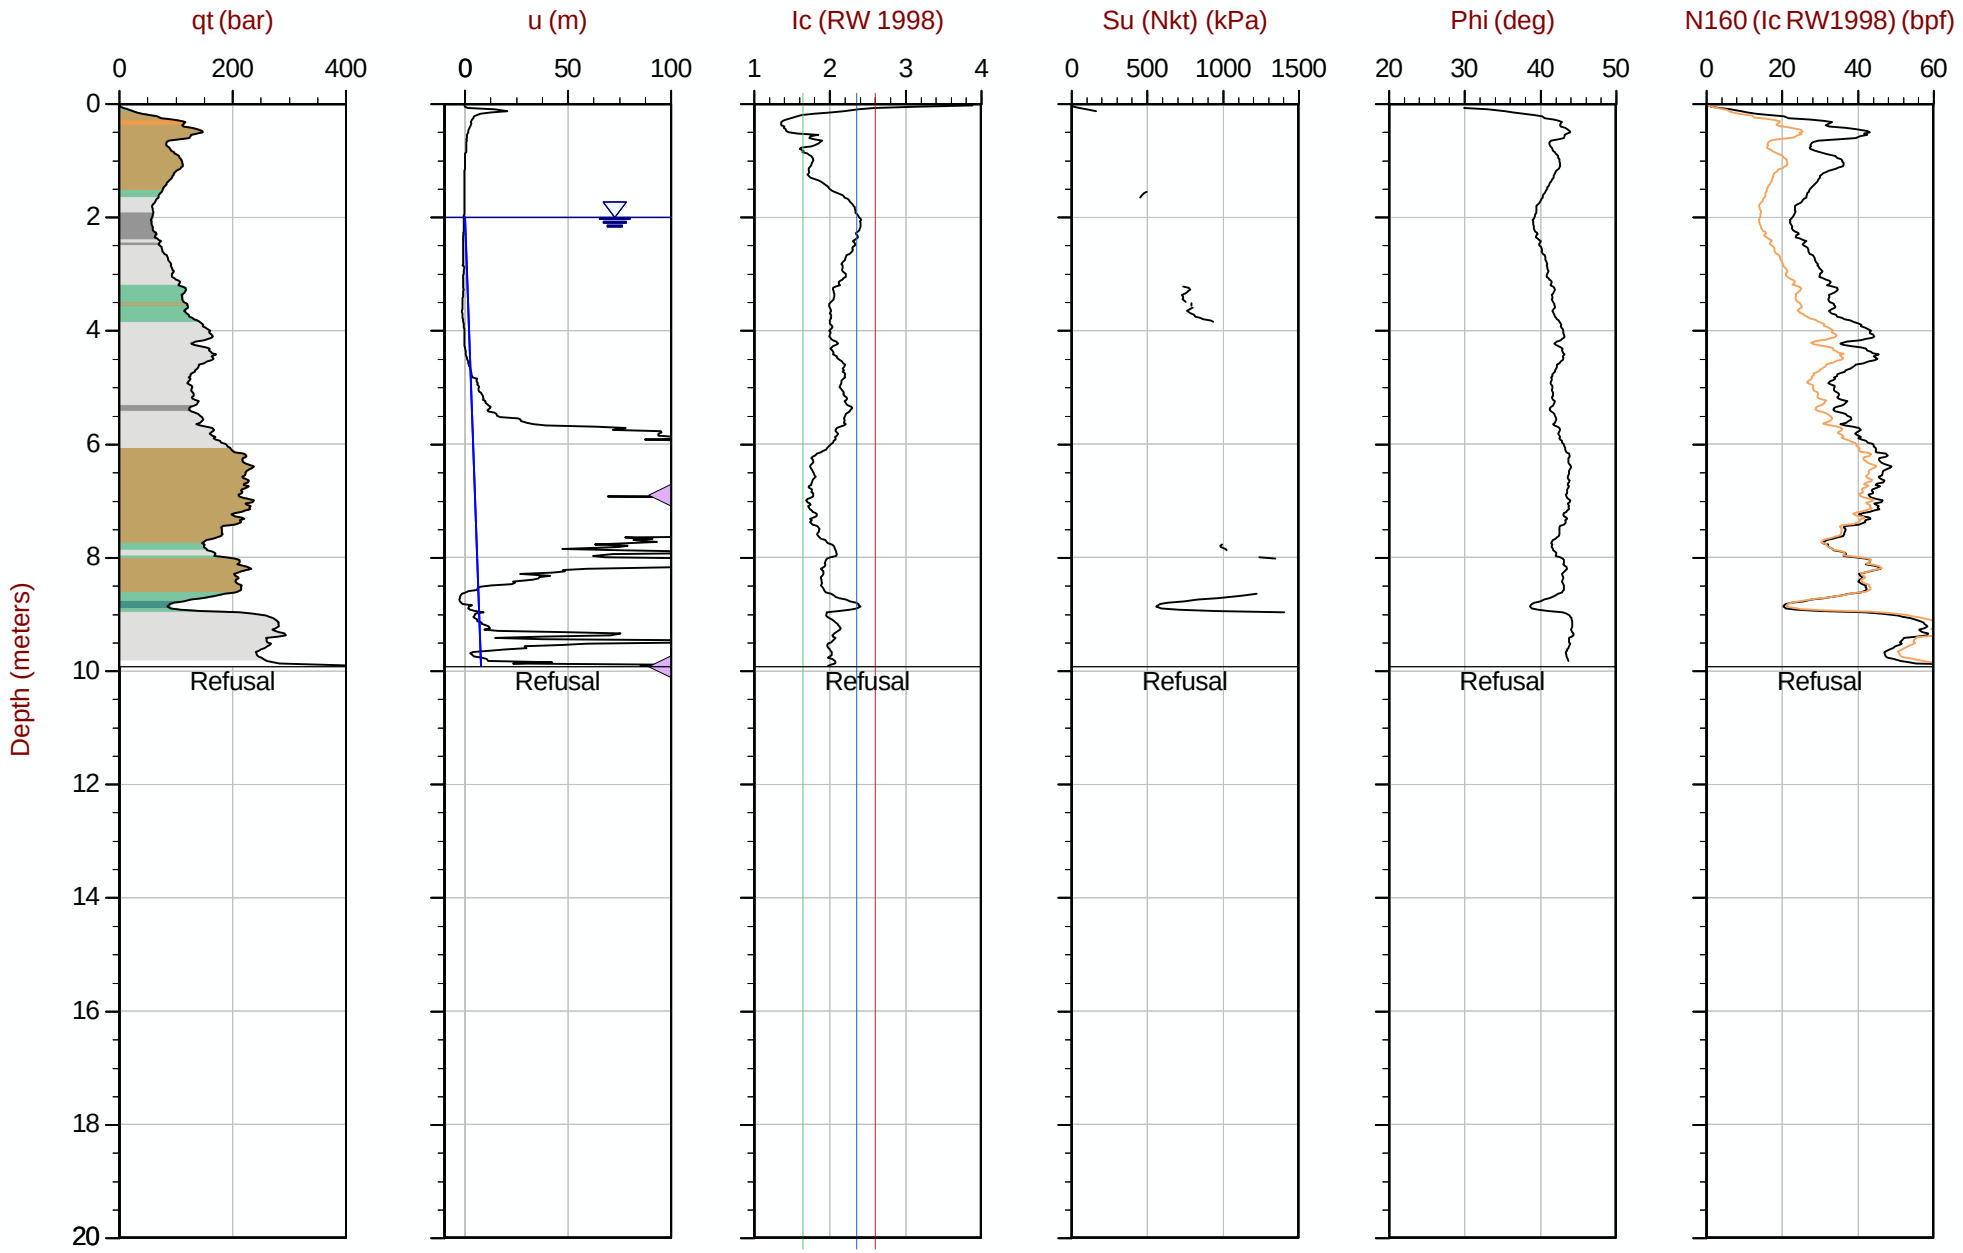

Max Depth: 9.925 m / 32.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT102.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612599m E: 413972m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 15:27
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT103
Cone: 651:T1500F15U35 Area= 15cm2

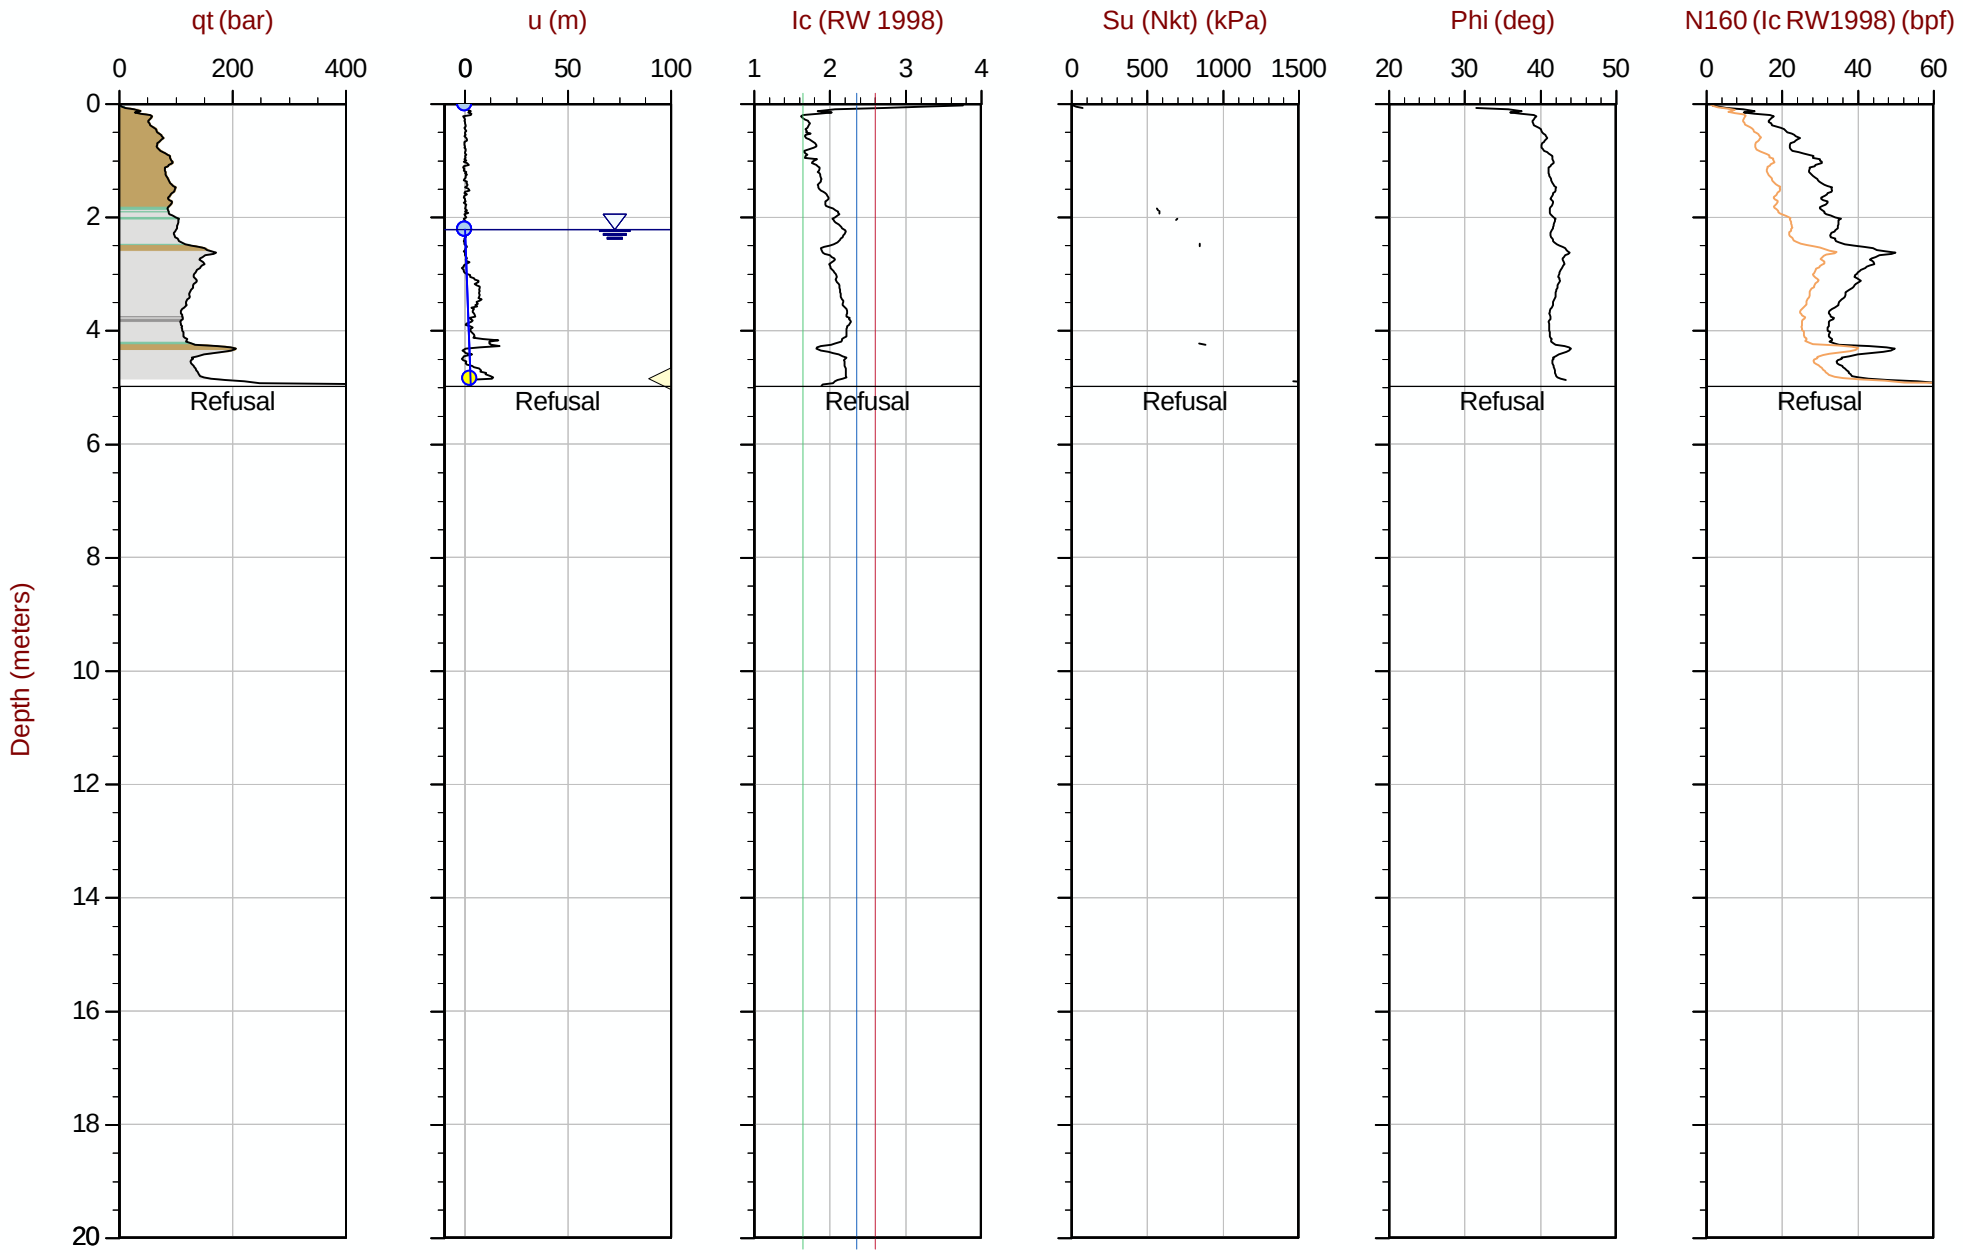

Max Depth: 4.975 m / 16.32 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT103.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612598m E: 414069m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 16:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT104
Cone: 651:T1500F15U35 Area= 15cm2

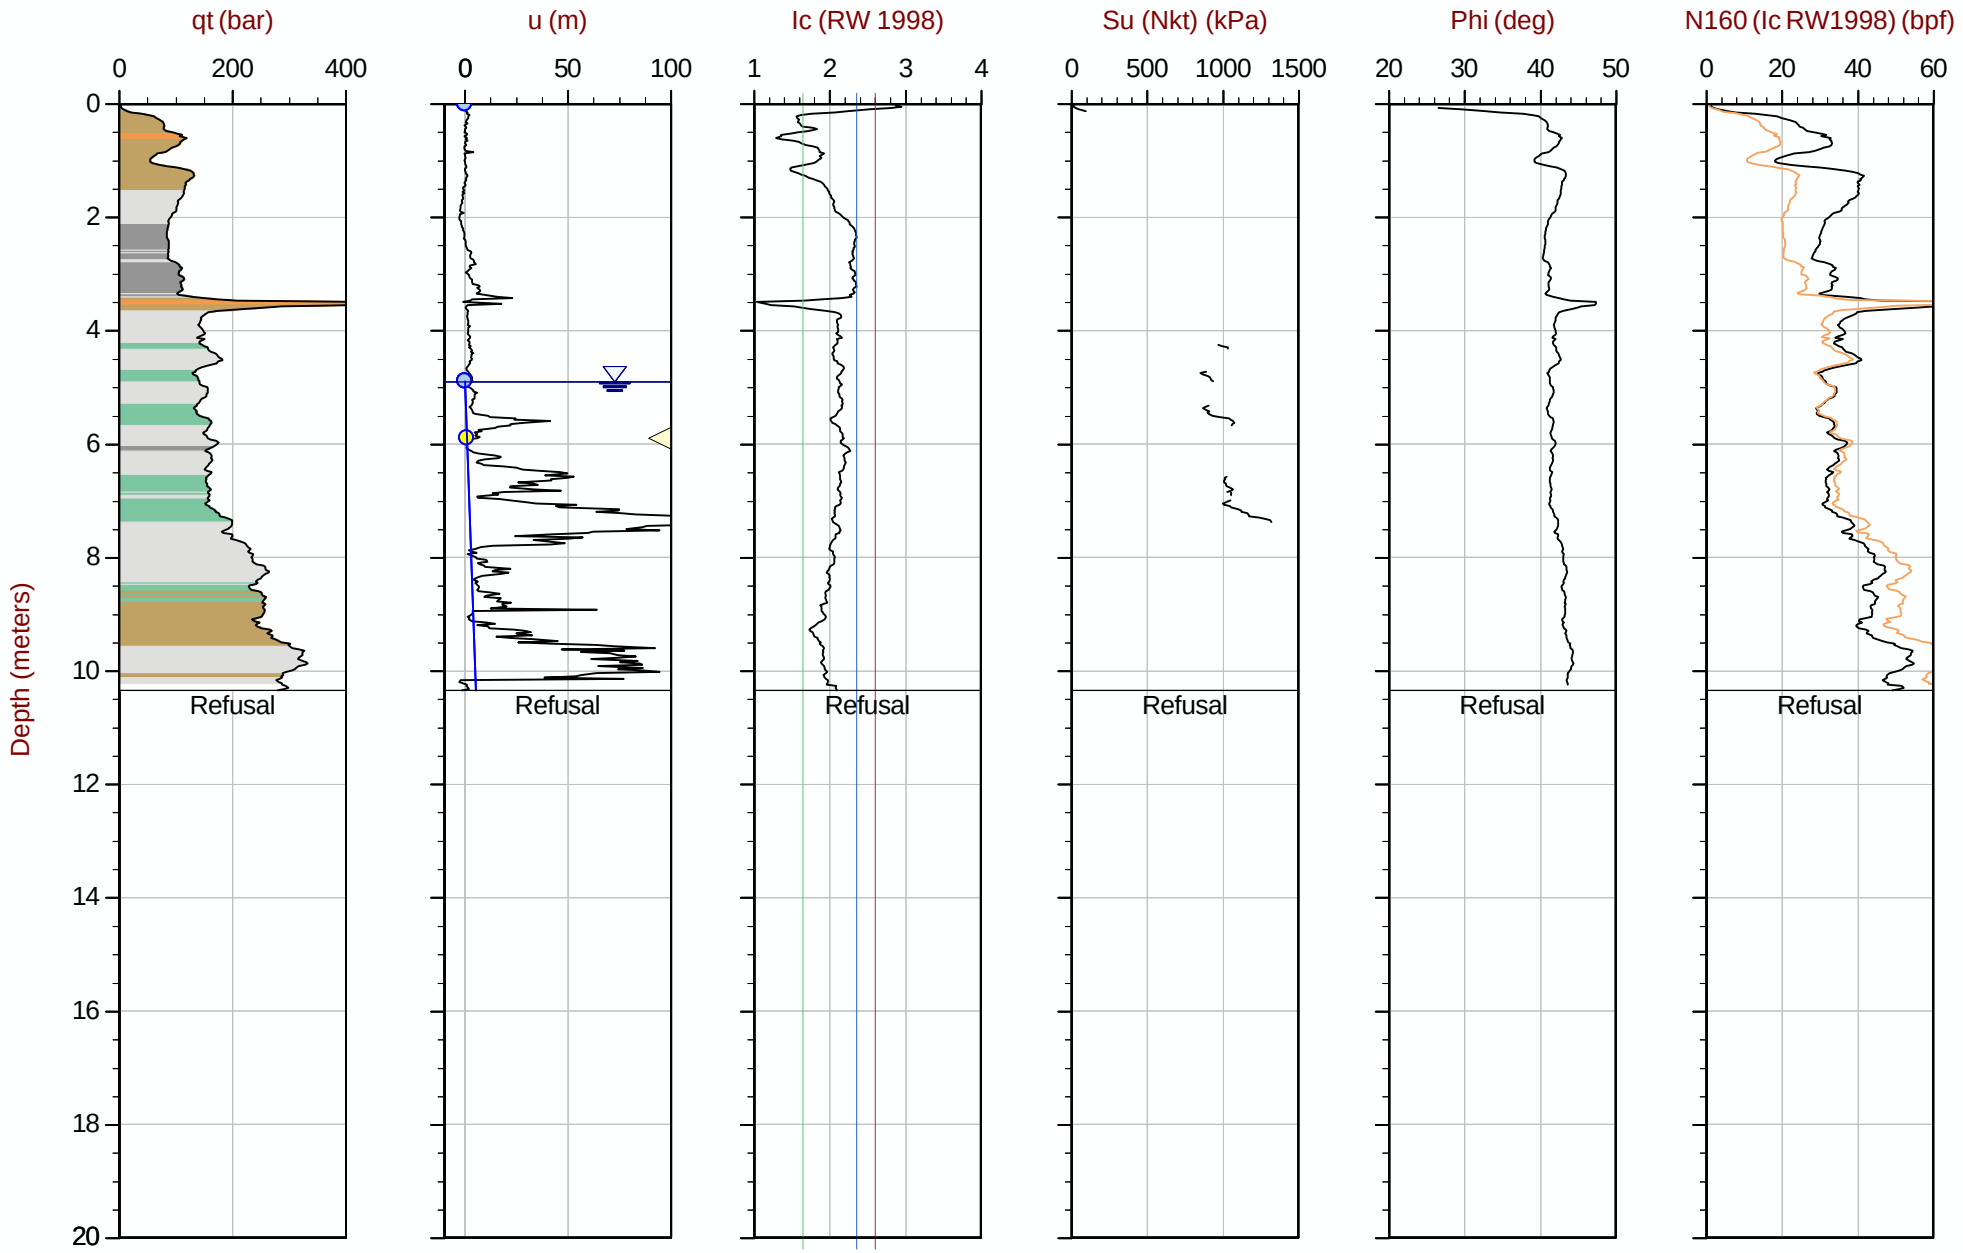

Max Depth: 10.350 m / 33.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT104.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 414171m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT105
Cone: 651:T1500F15U35 Area= 15cm2

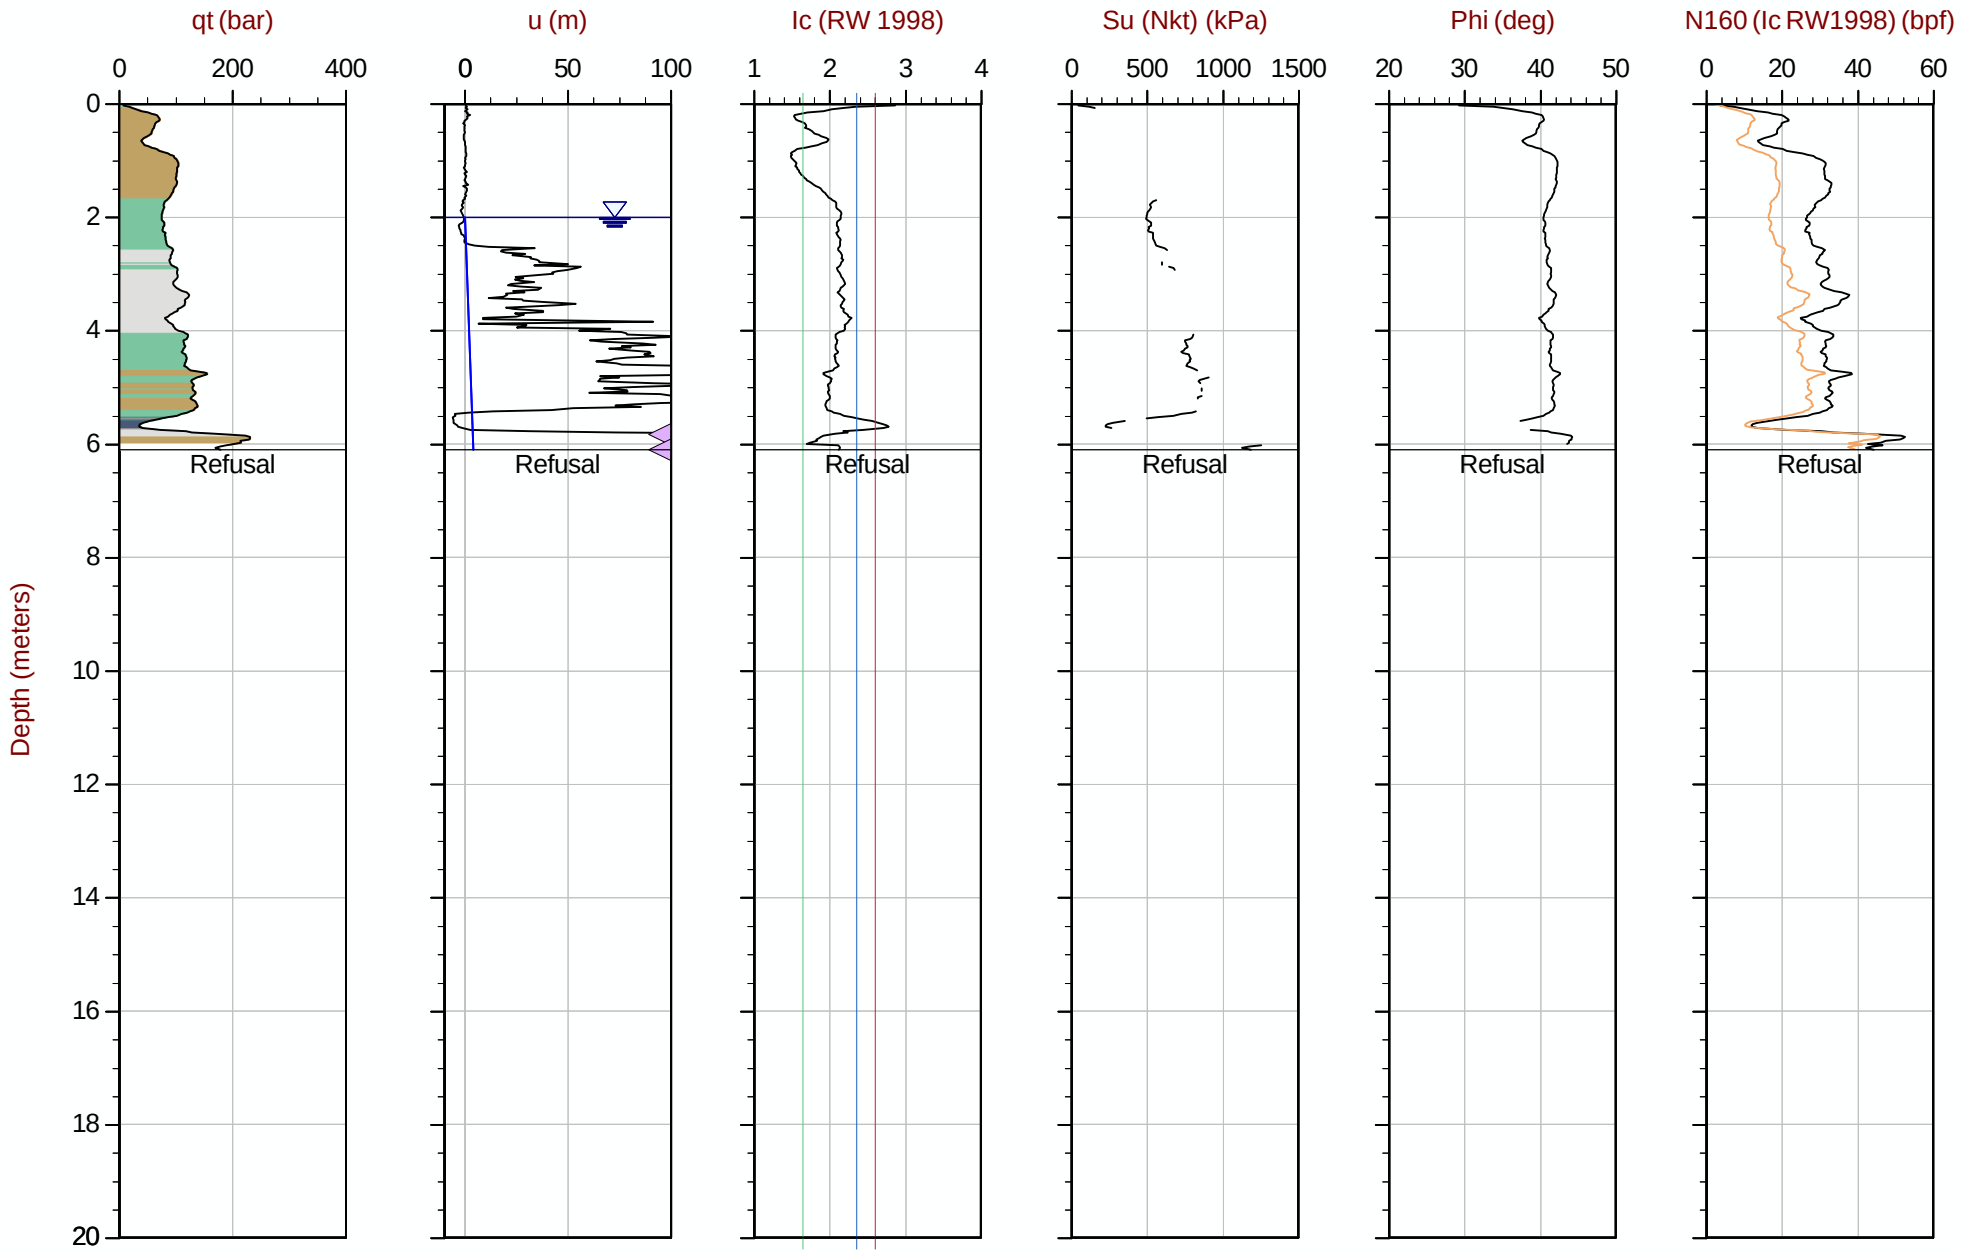

Max Depth: 6.100 m / 20.01 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT105.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612600m E: 414271m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 11:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT106
Cone: 651:T1500F15U35 Area= 15cm2

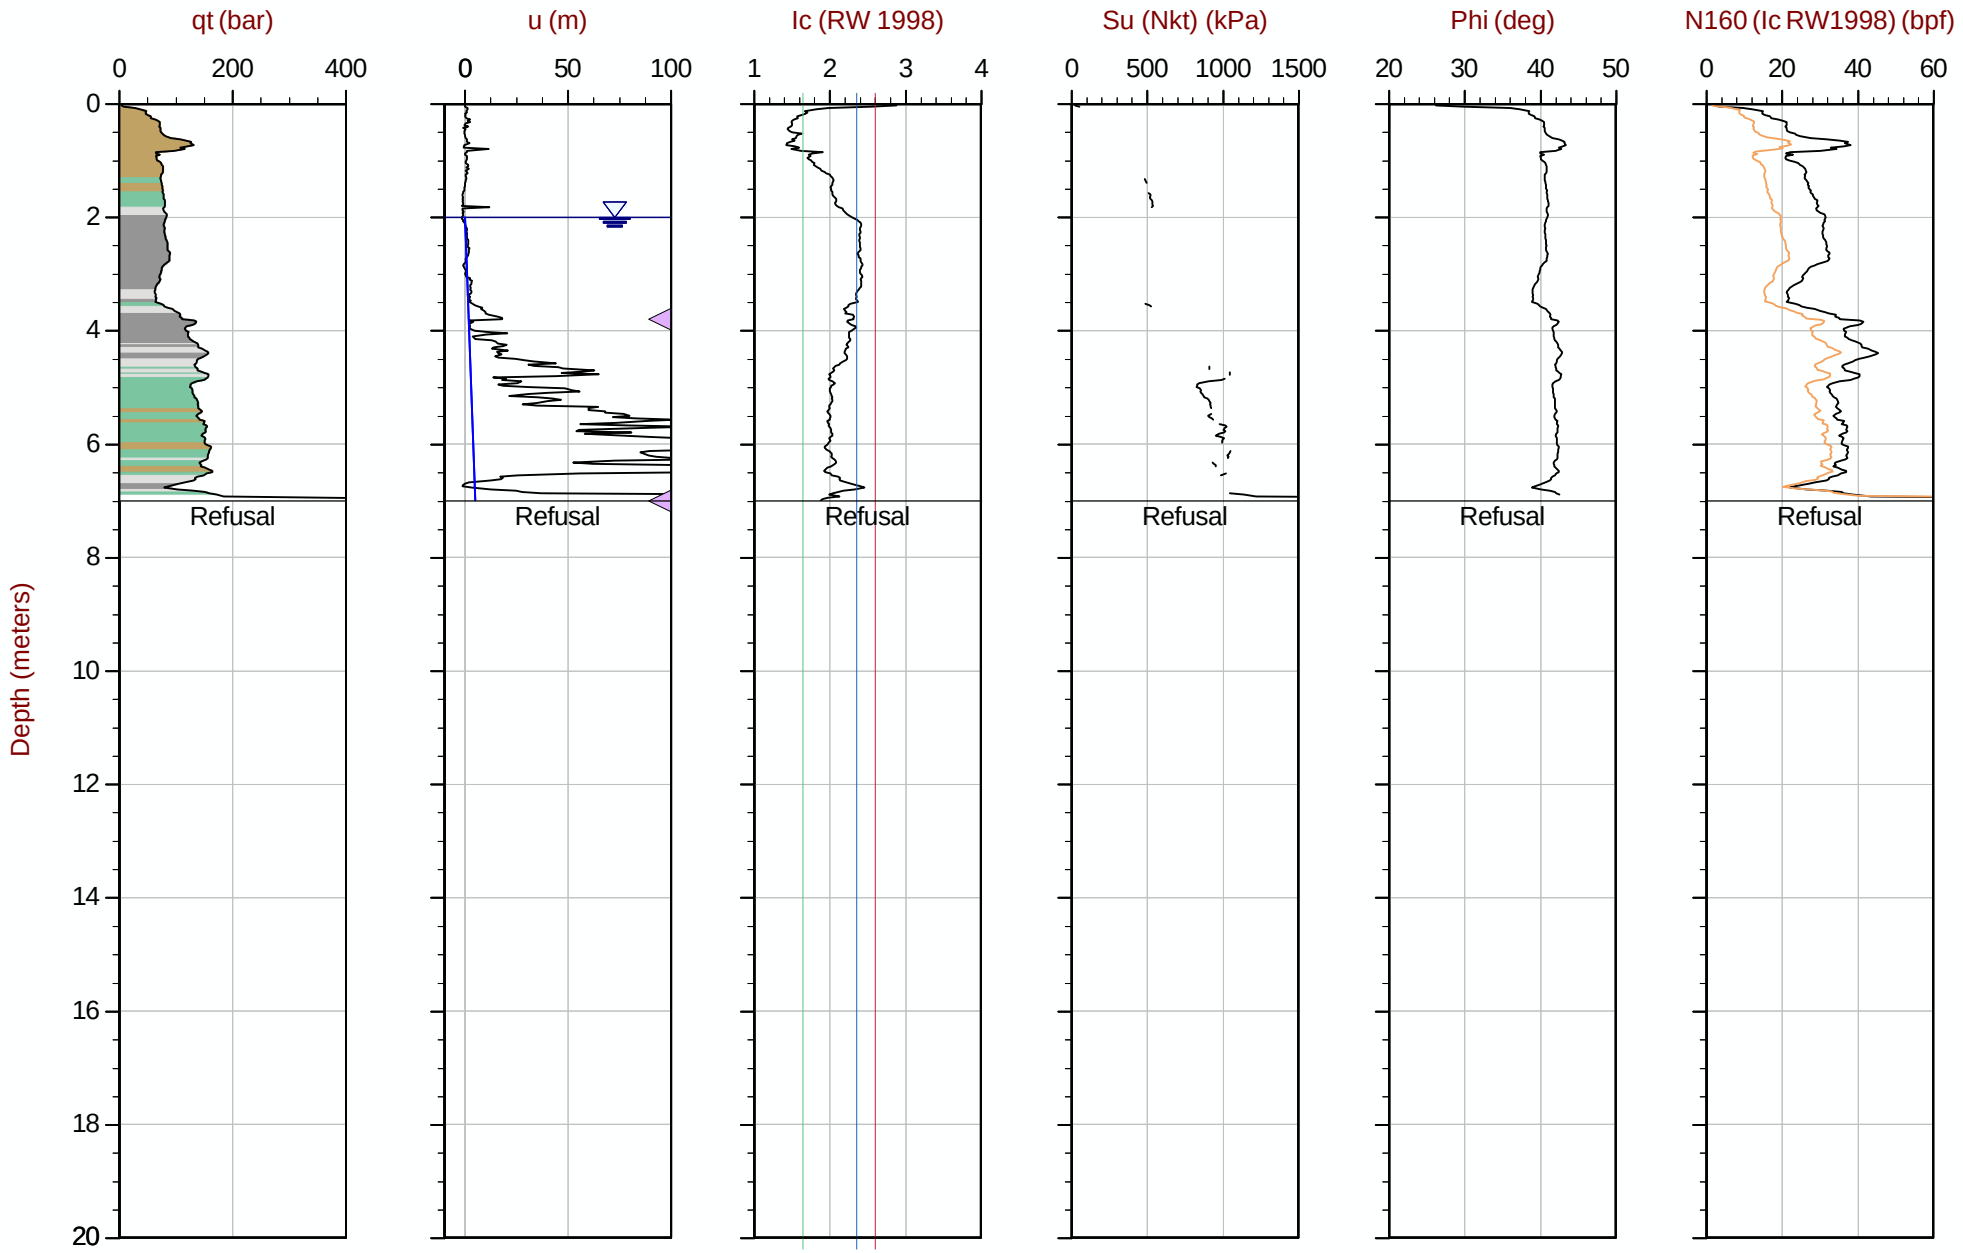

Max Depth: 7.000 m / 22.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT106.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612599m E: 414321m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 12:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT107
Cone: 651:T1500F15U35 Area= 15cm2

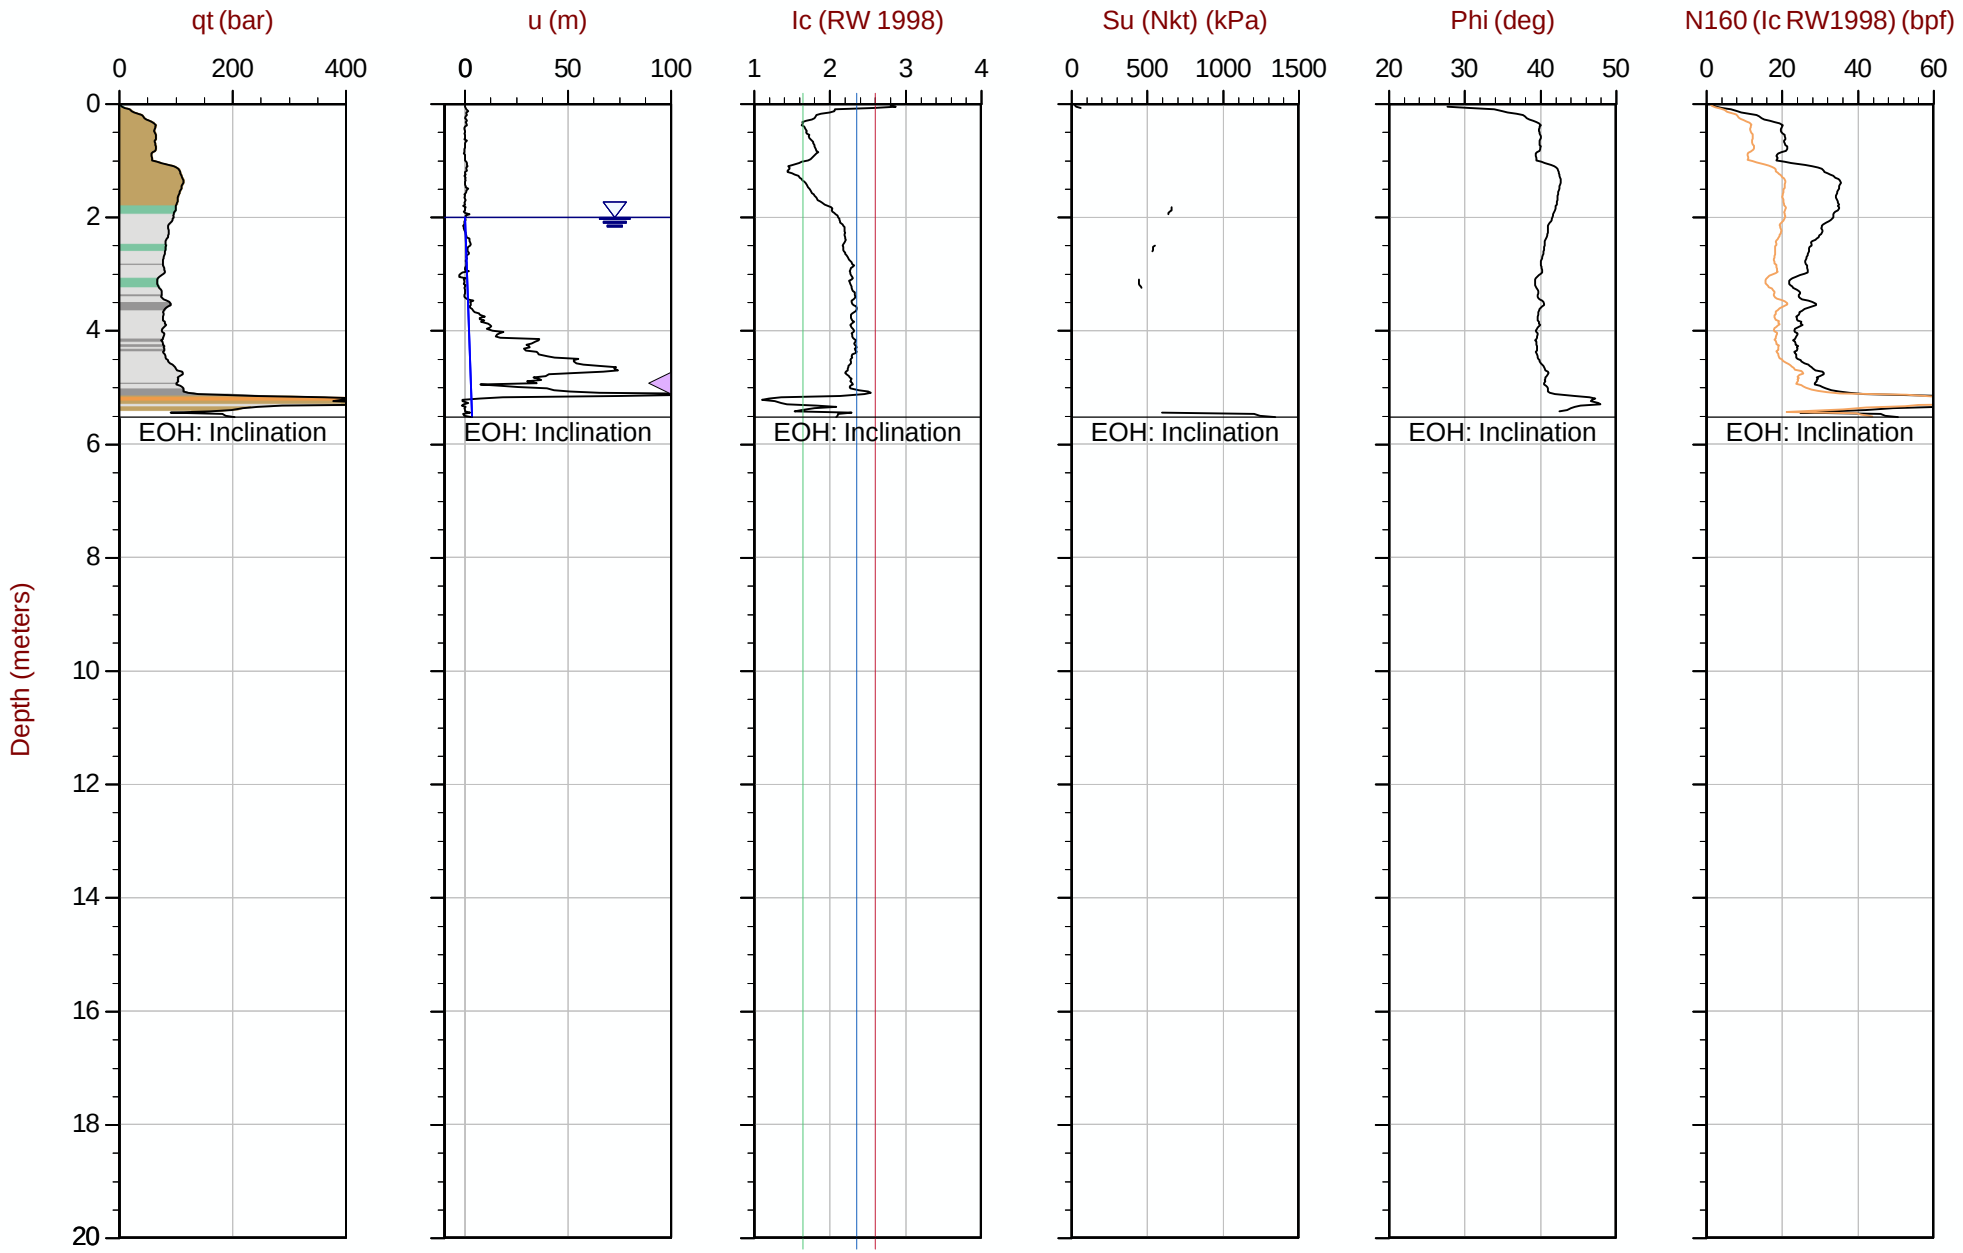

Max Depth: 5.525 m / 18.13 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT107.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612599m E: 414369m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 14:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT107A
Cone: 750:T1500F15U35 Area= 15cm2

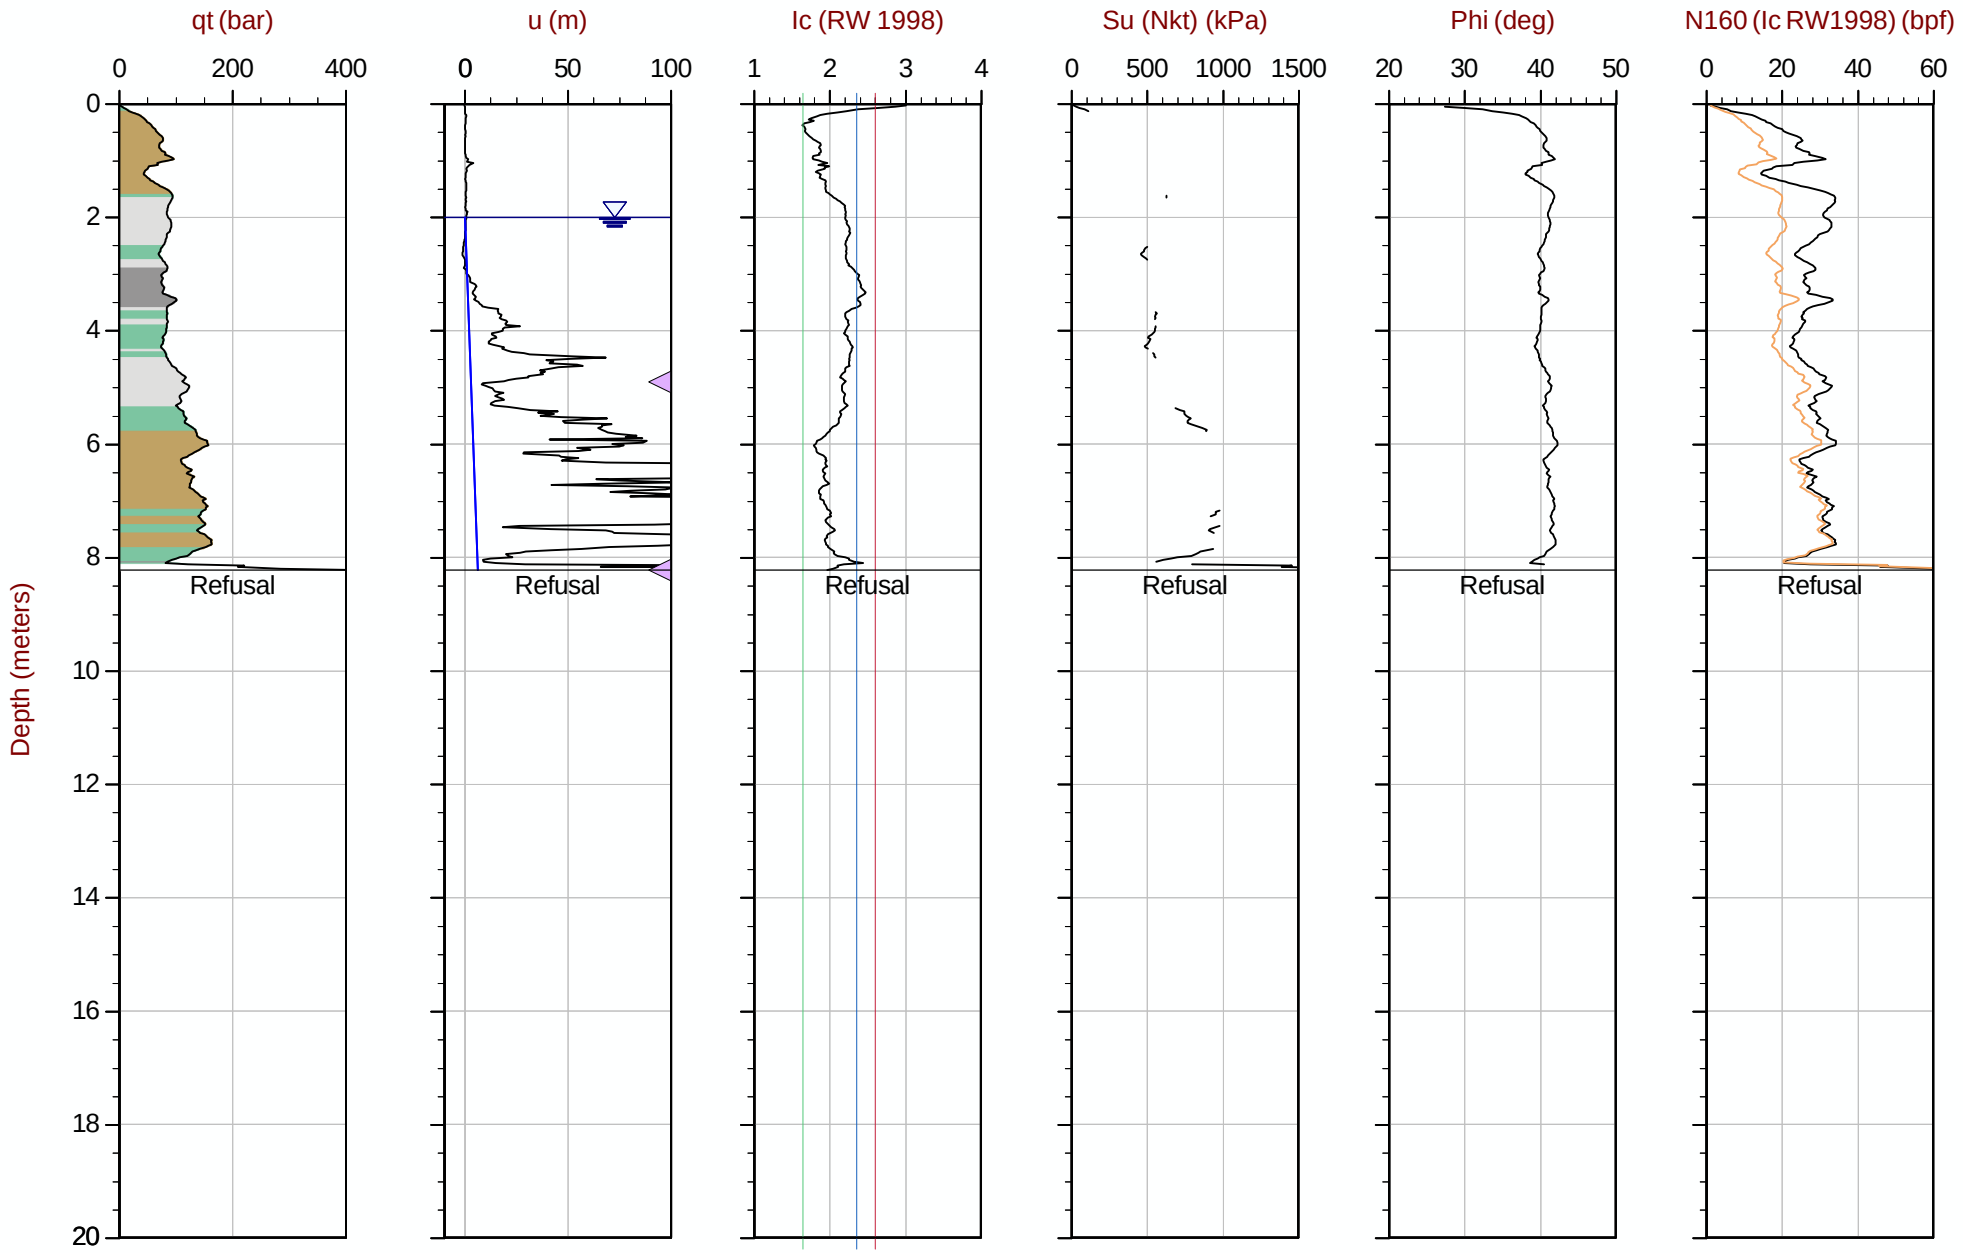

Max Depth: 8.225 m / 26.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT107A.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612616m E: 414367m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 16:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT108
Cone: 750:T1500F15U35 Area= 15cm2

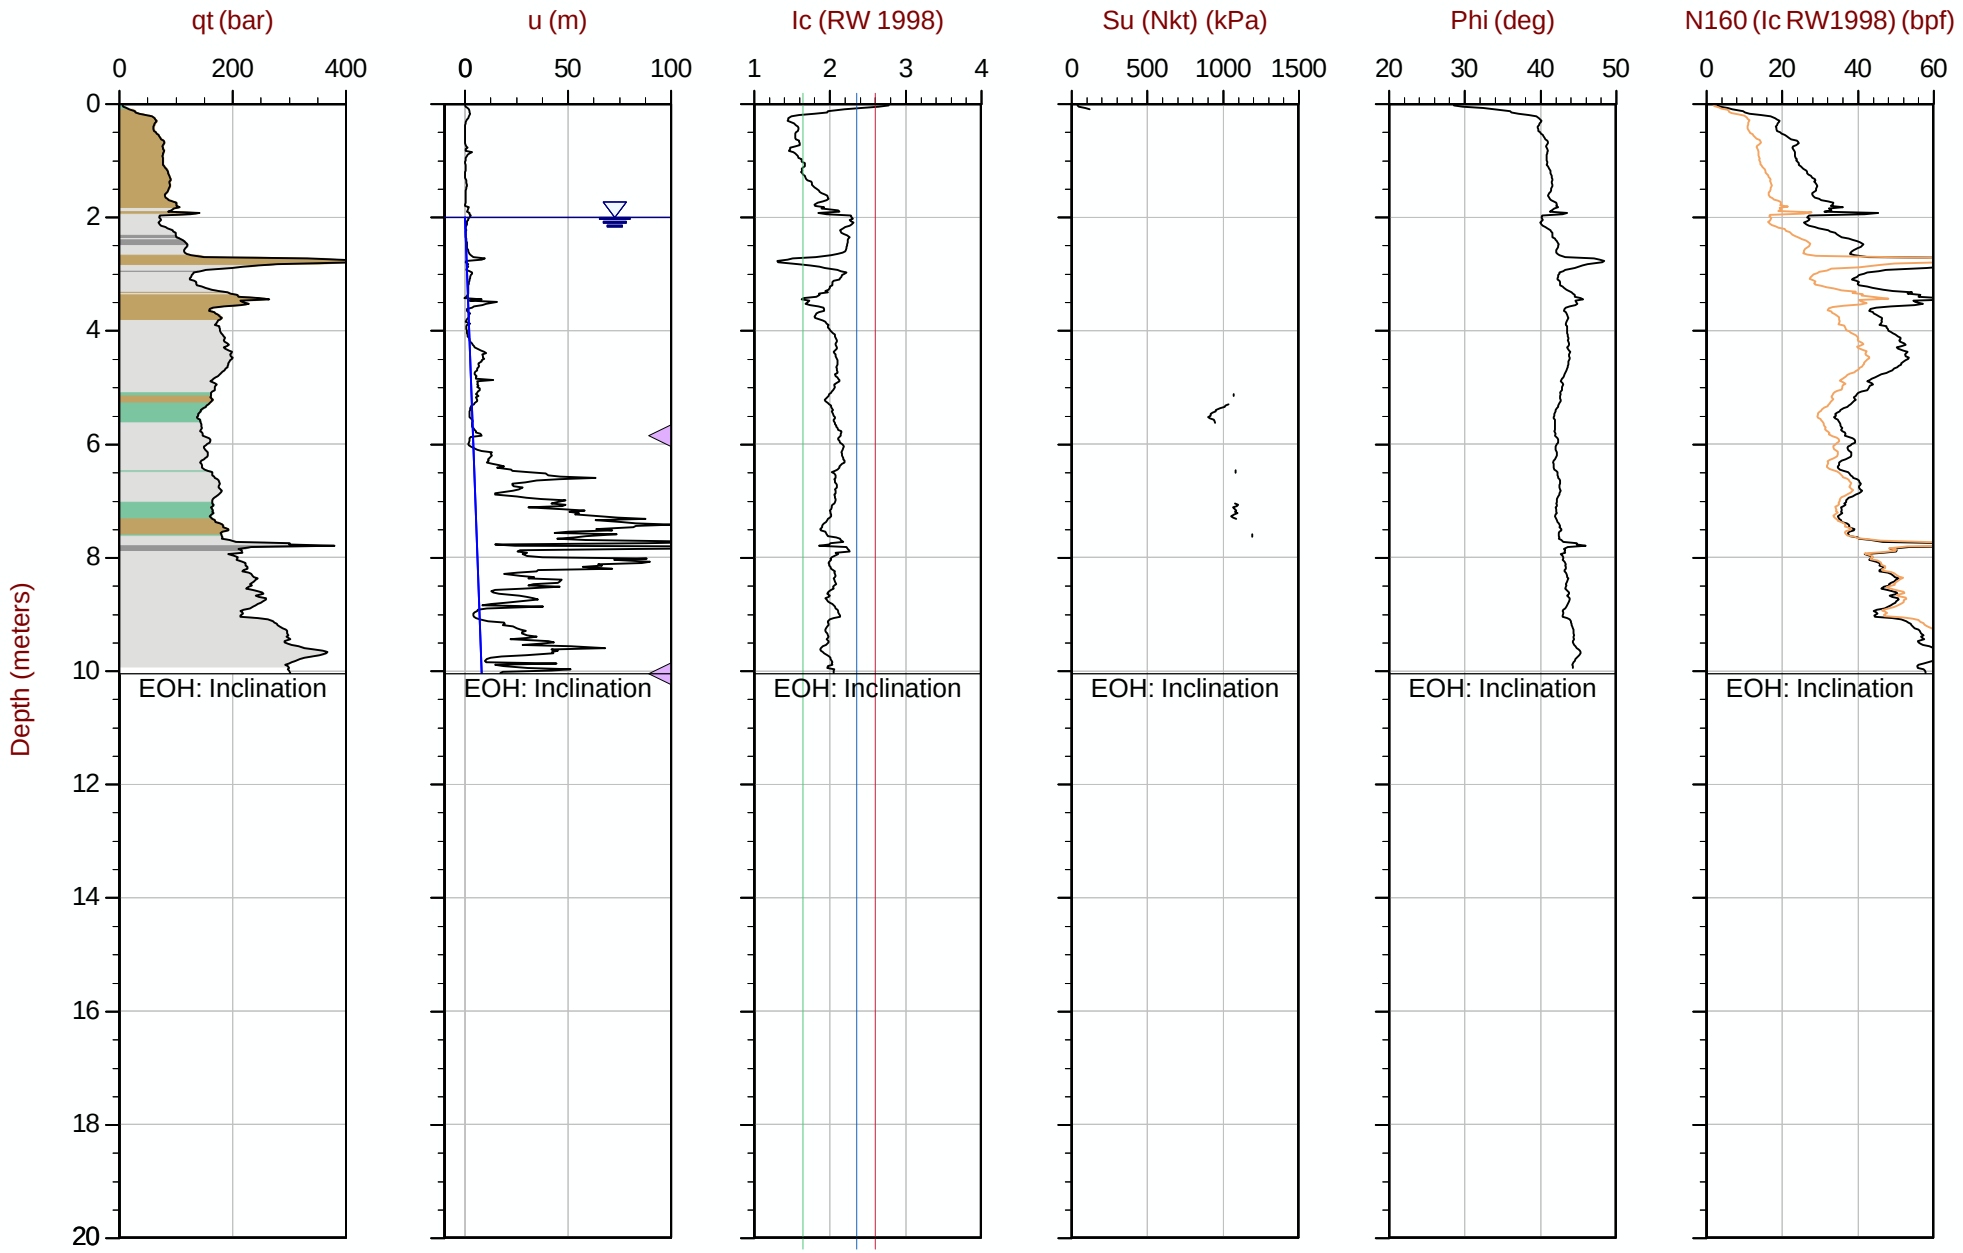

Max Depth: 10.050 m / 32.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT108.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 414520m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 08:46
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT109
Cone: 750:T1500F15U35 Area= 15cm2

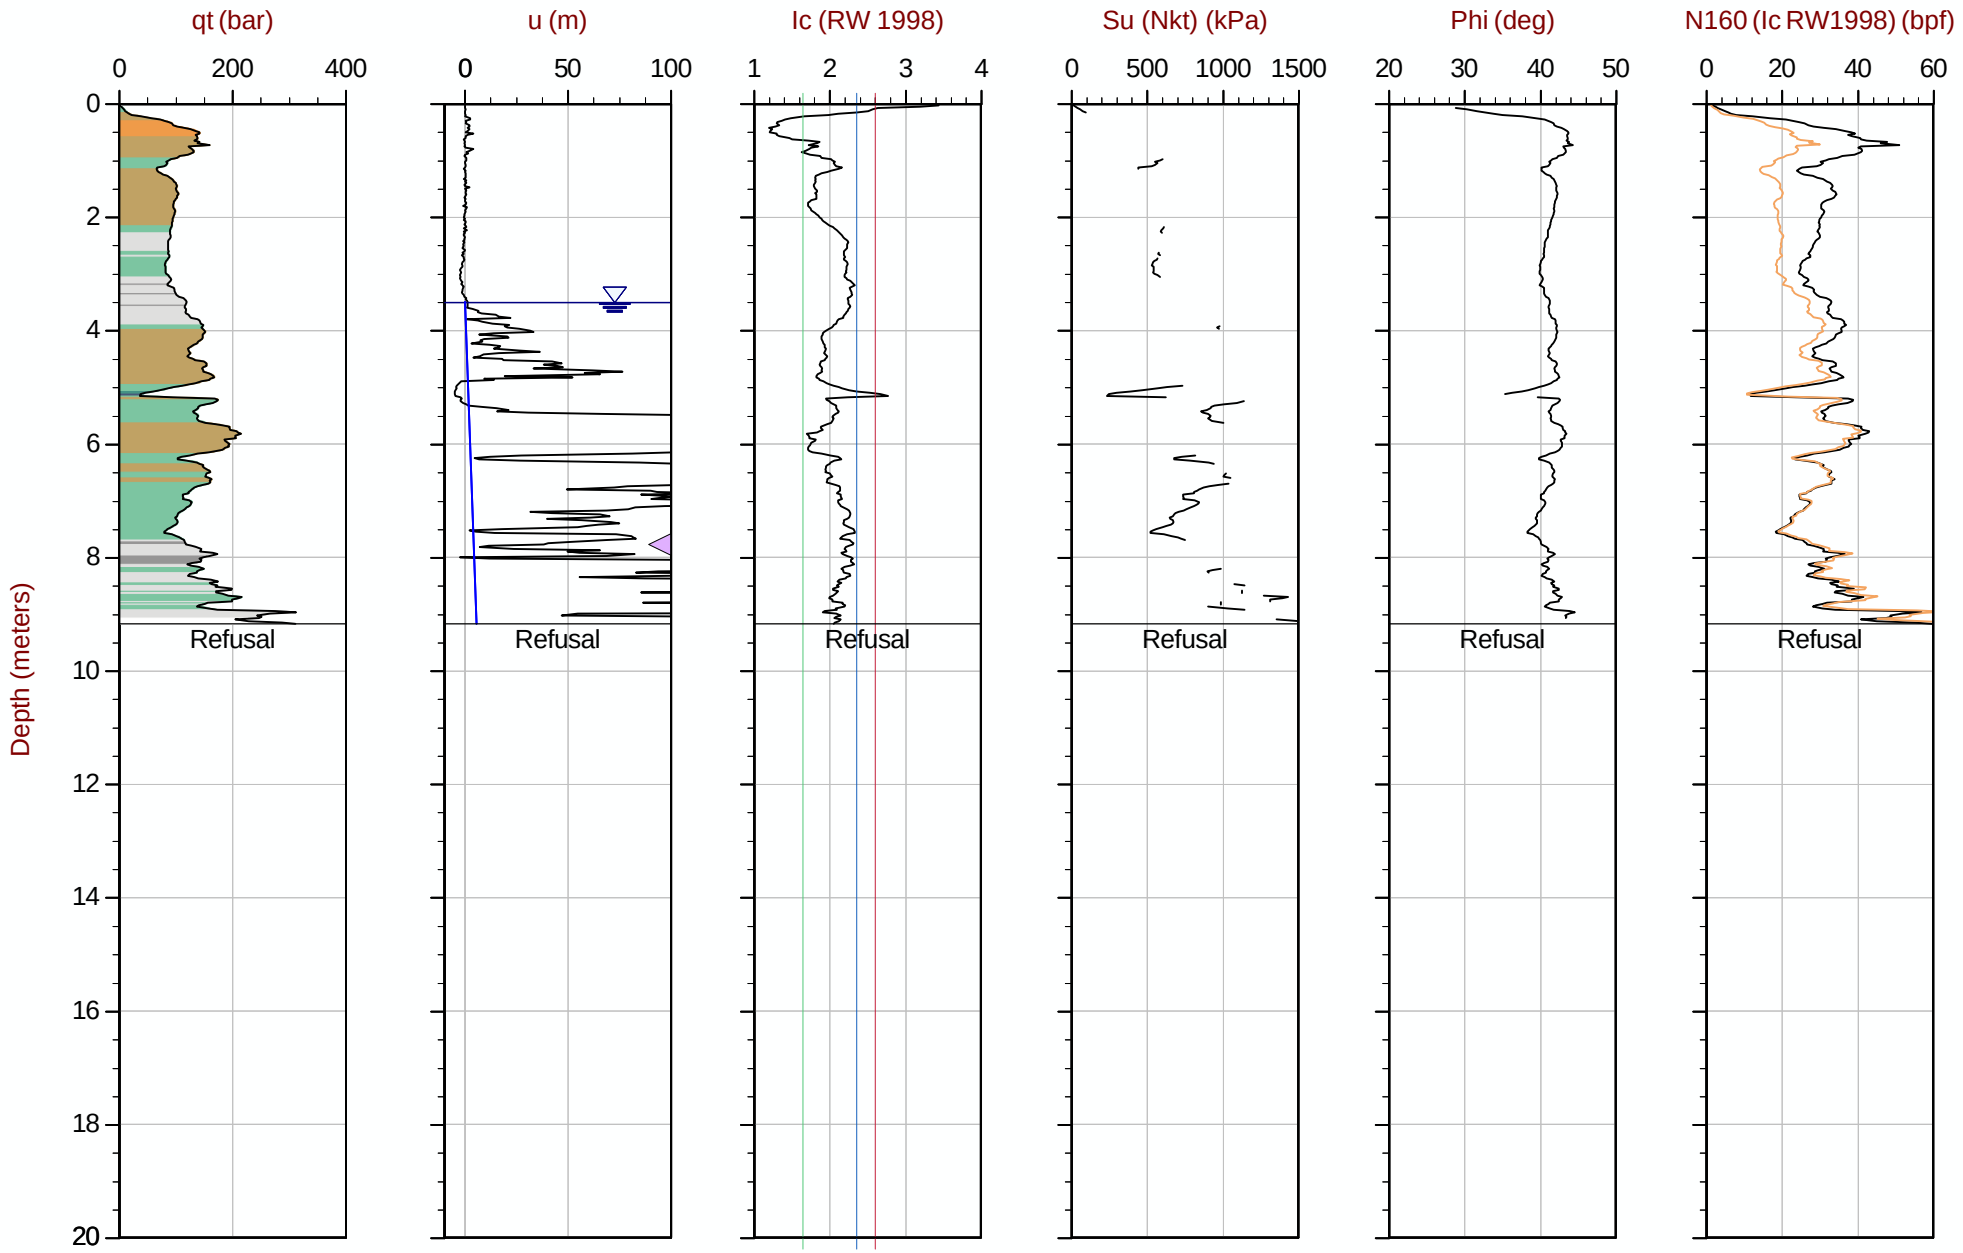

Max Depth: 9.175 m / 30.10 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT109.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 414569m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 16:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110
Cone: 750:T1500F15U35 Area= 15cm2

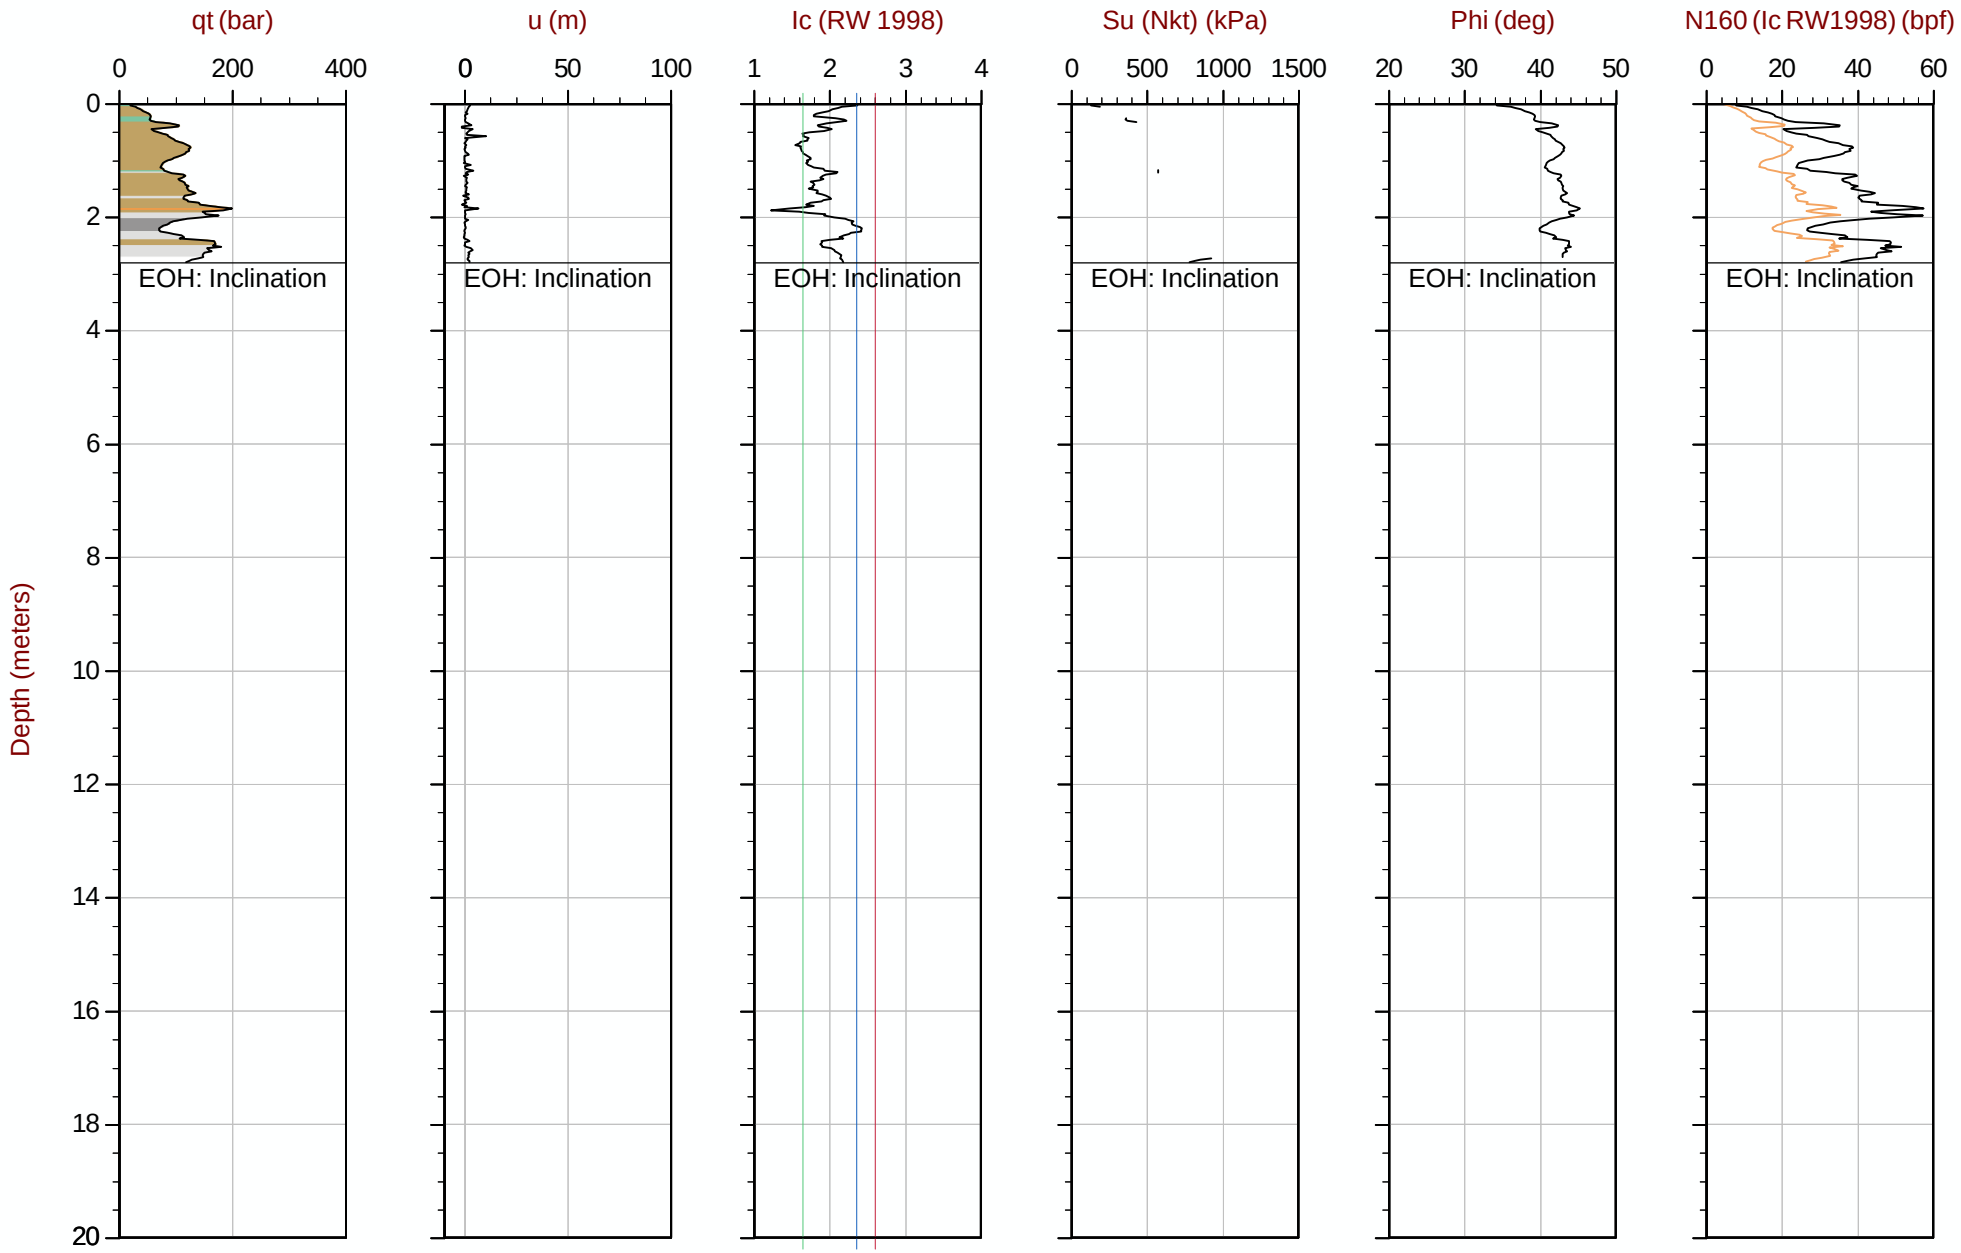

Max Depth: 2.800 m / 9.19 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT110.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612594m E: 414669m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 16:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110A
Cone: 750:T1500F15U35 Area= 15cm2

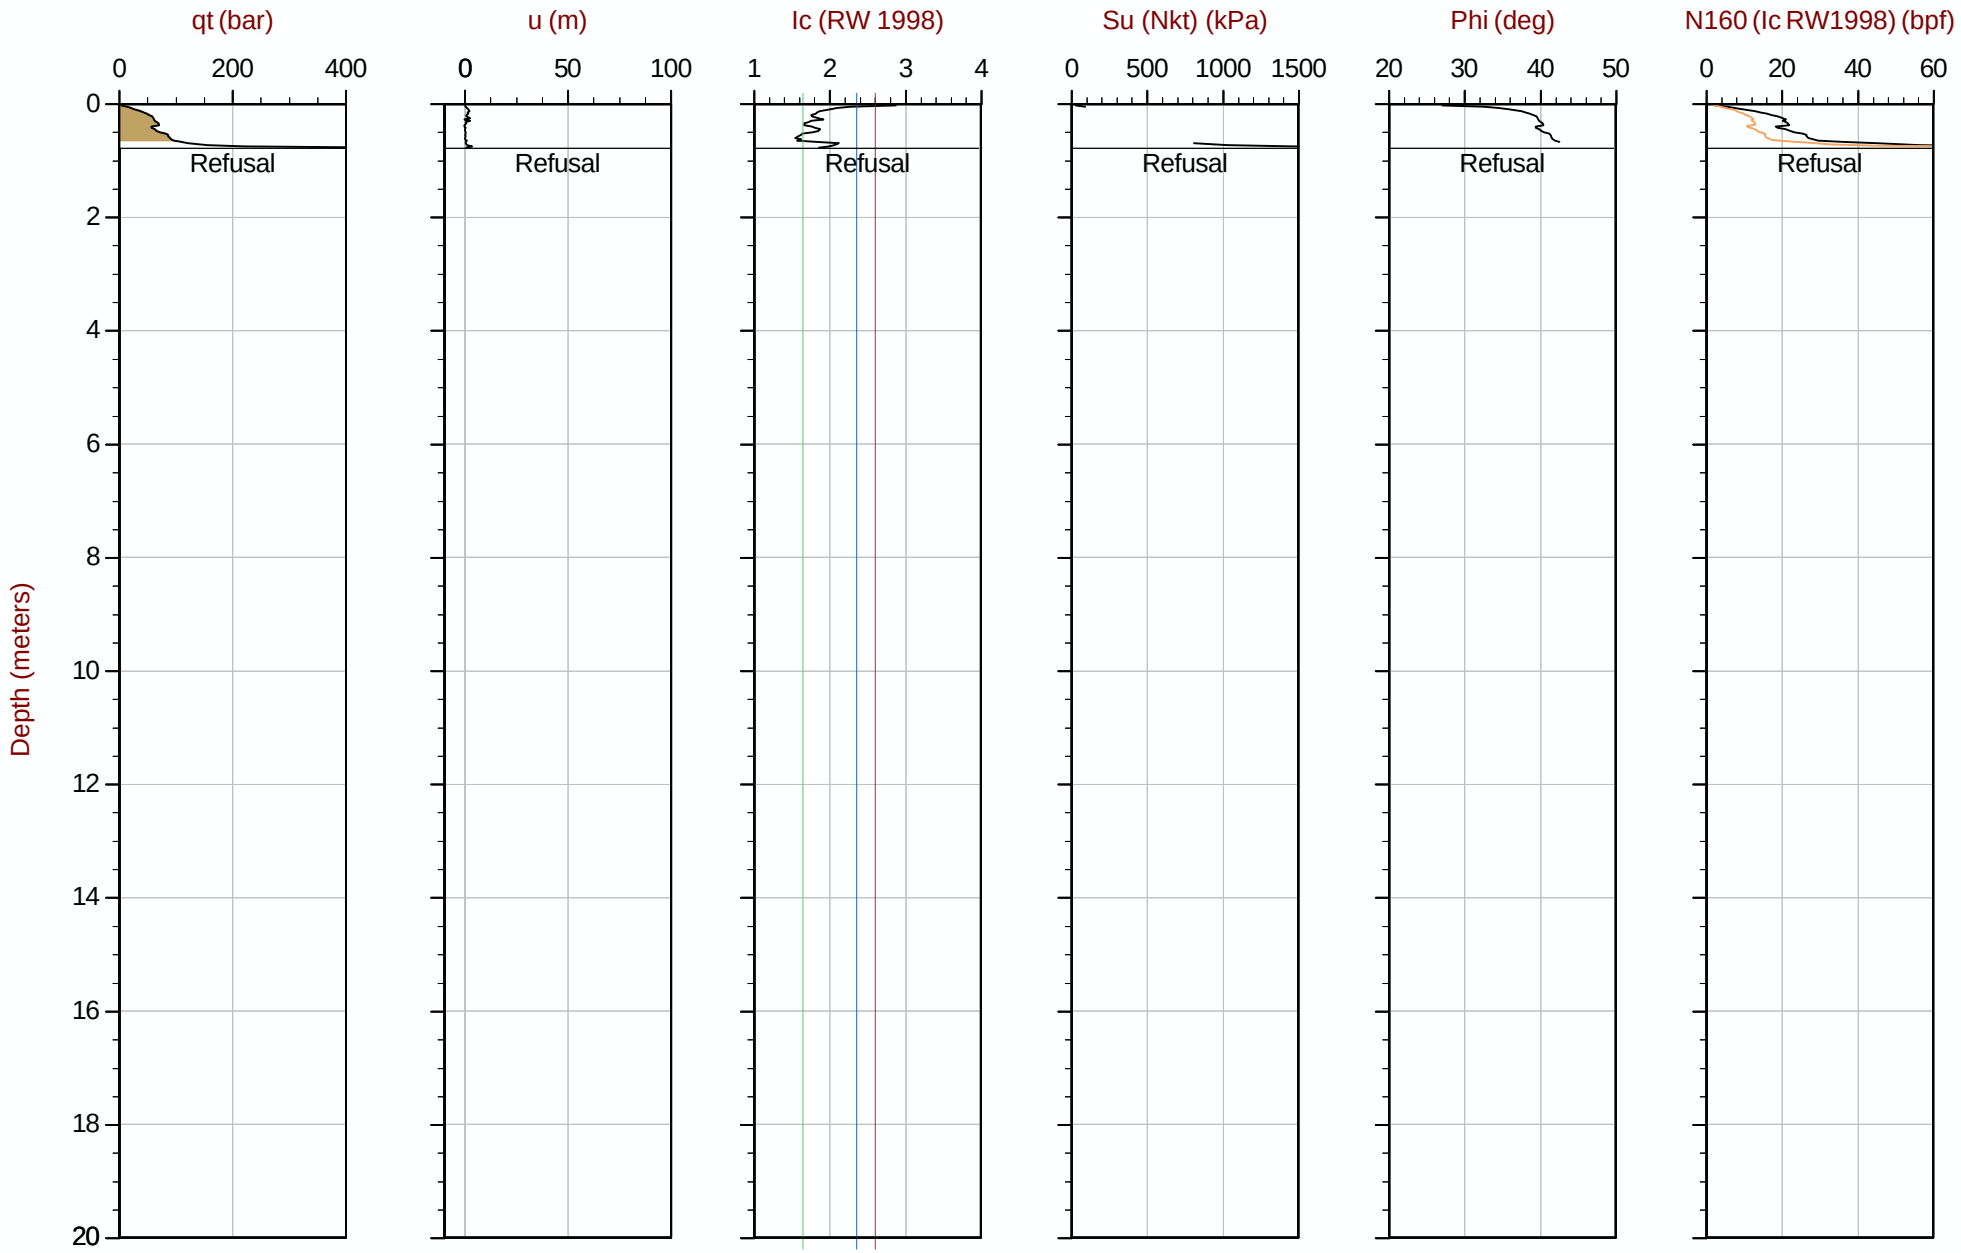

Max Depth: 0.775 m / 2.54 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT110A.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612594m E: 414669m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 17:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110B
Cone: 750:T1500F15U35 Area= 15cm2

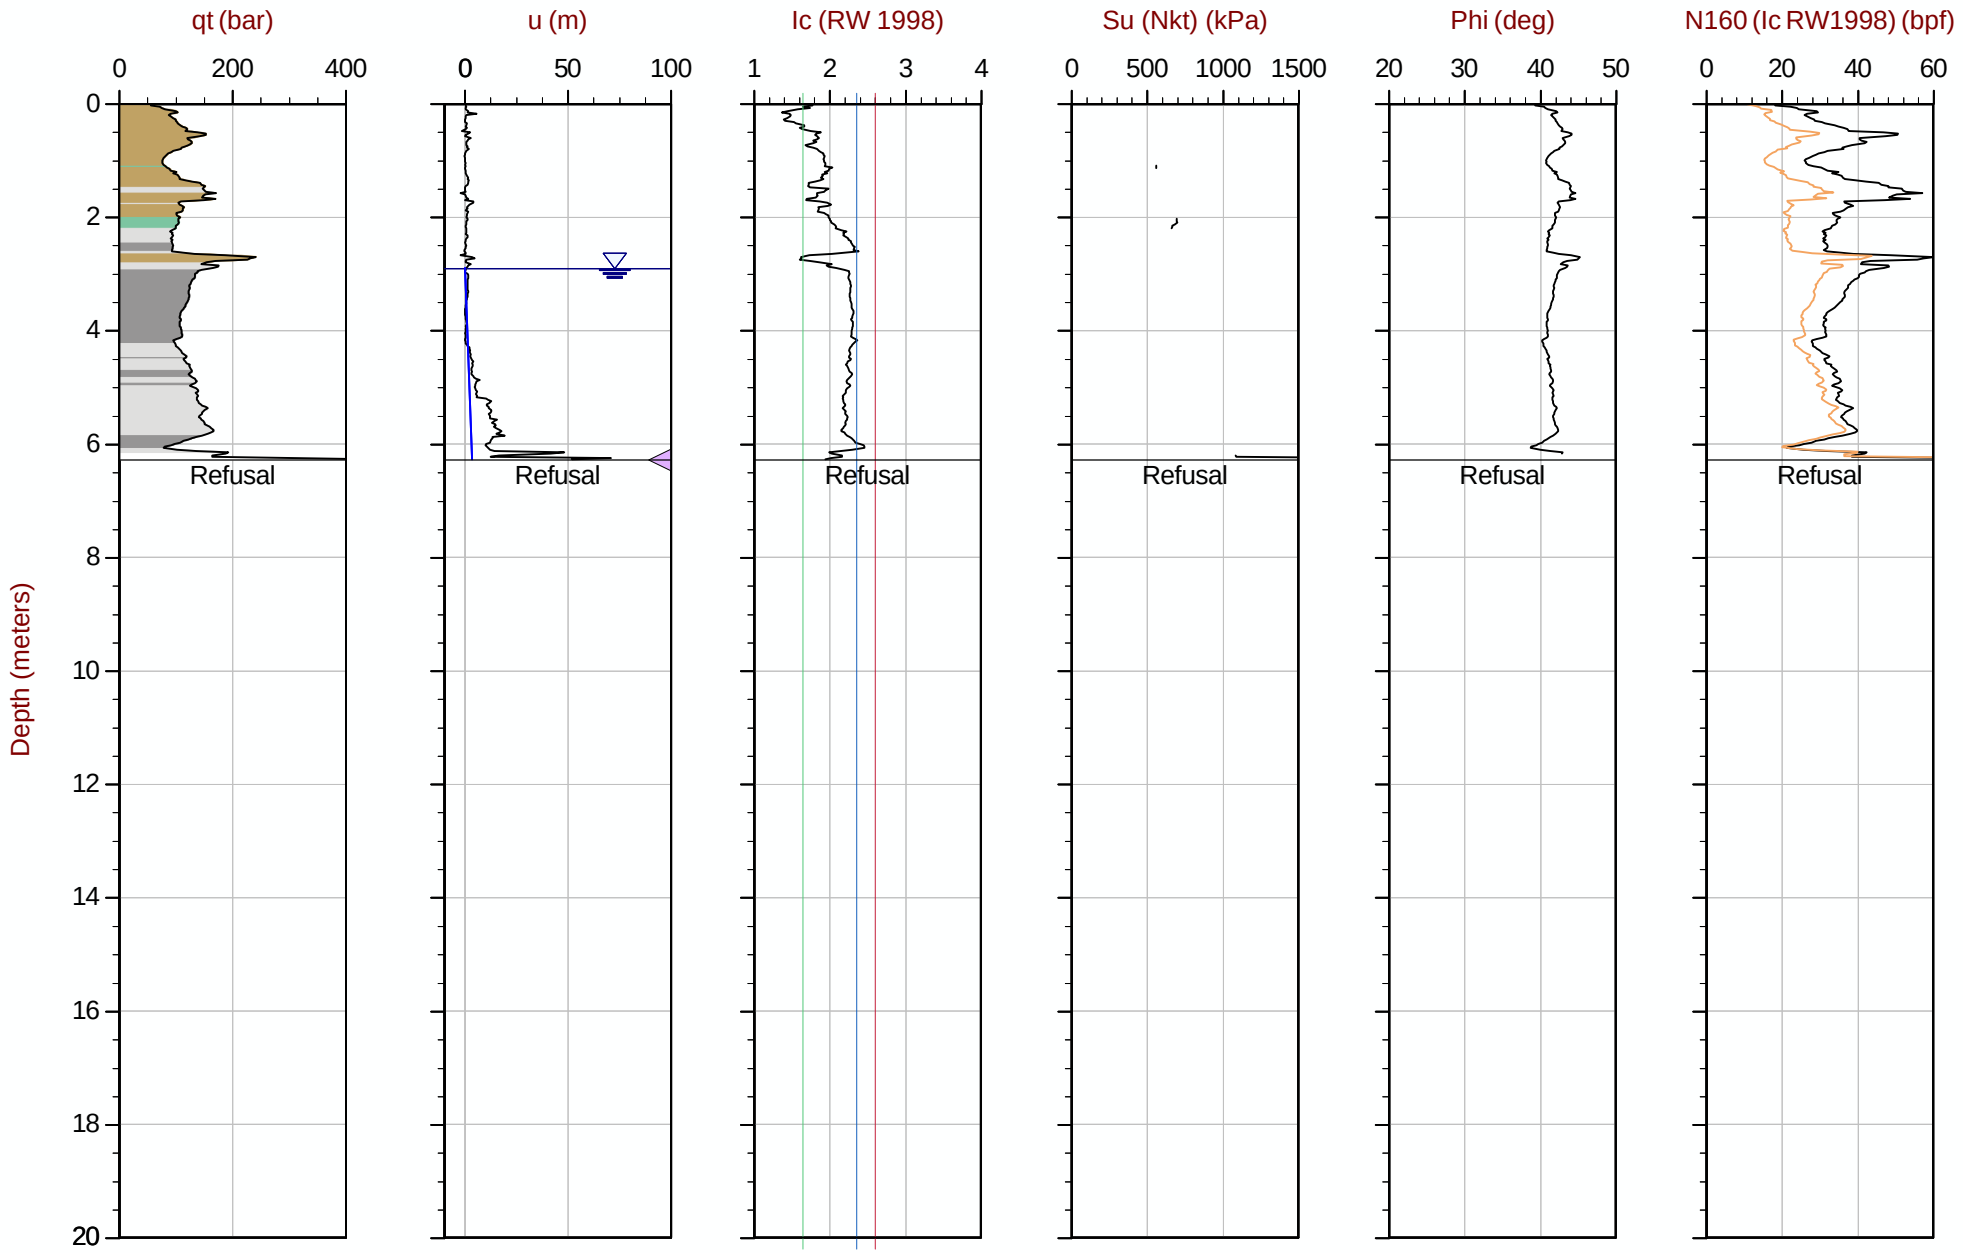

Max Depth: 6.275 m / 20.59 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT110B.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612594m E: 414669m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 14:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT111
Cone: 750:T1500F15U35 Area= 15cm2

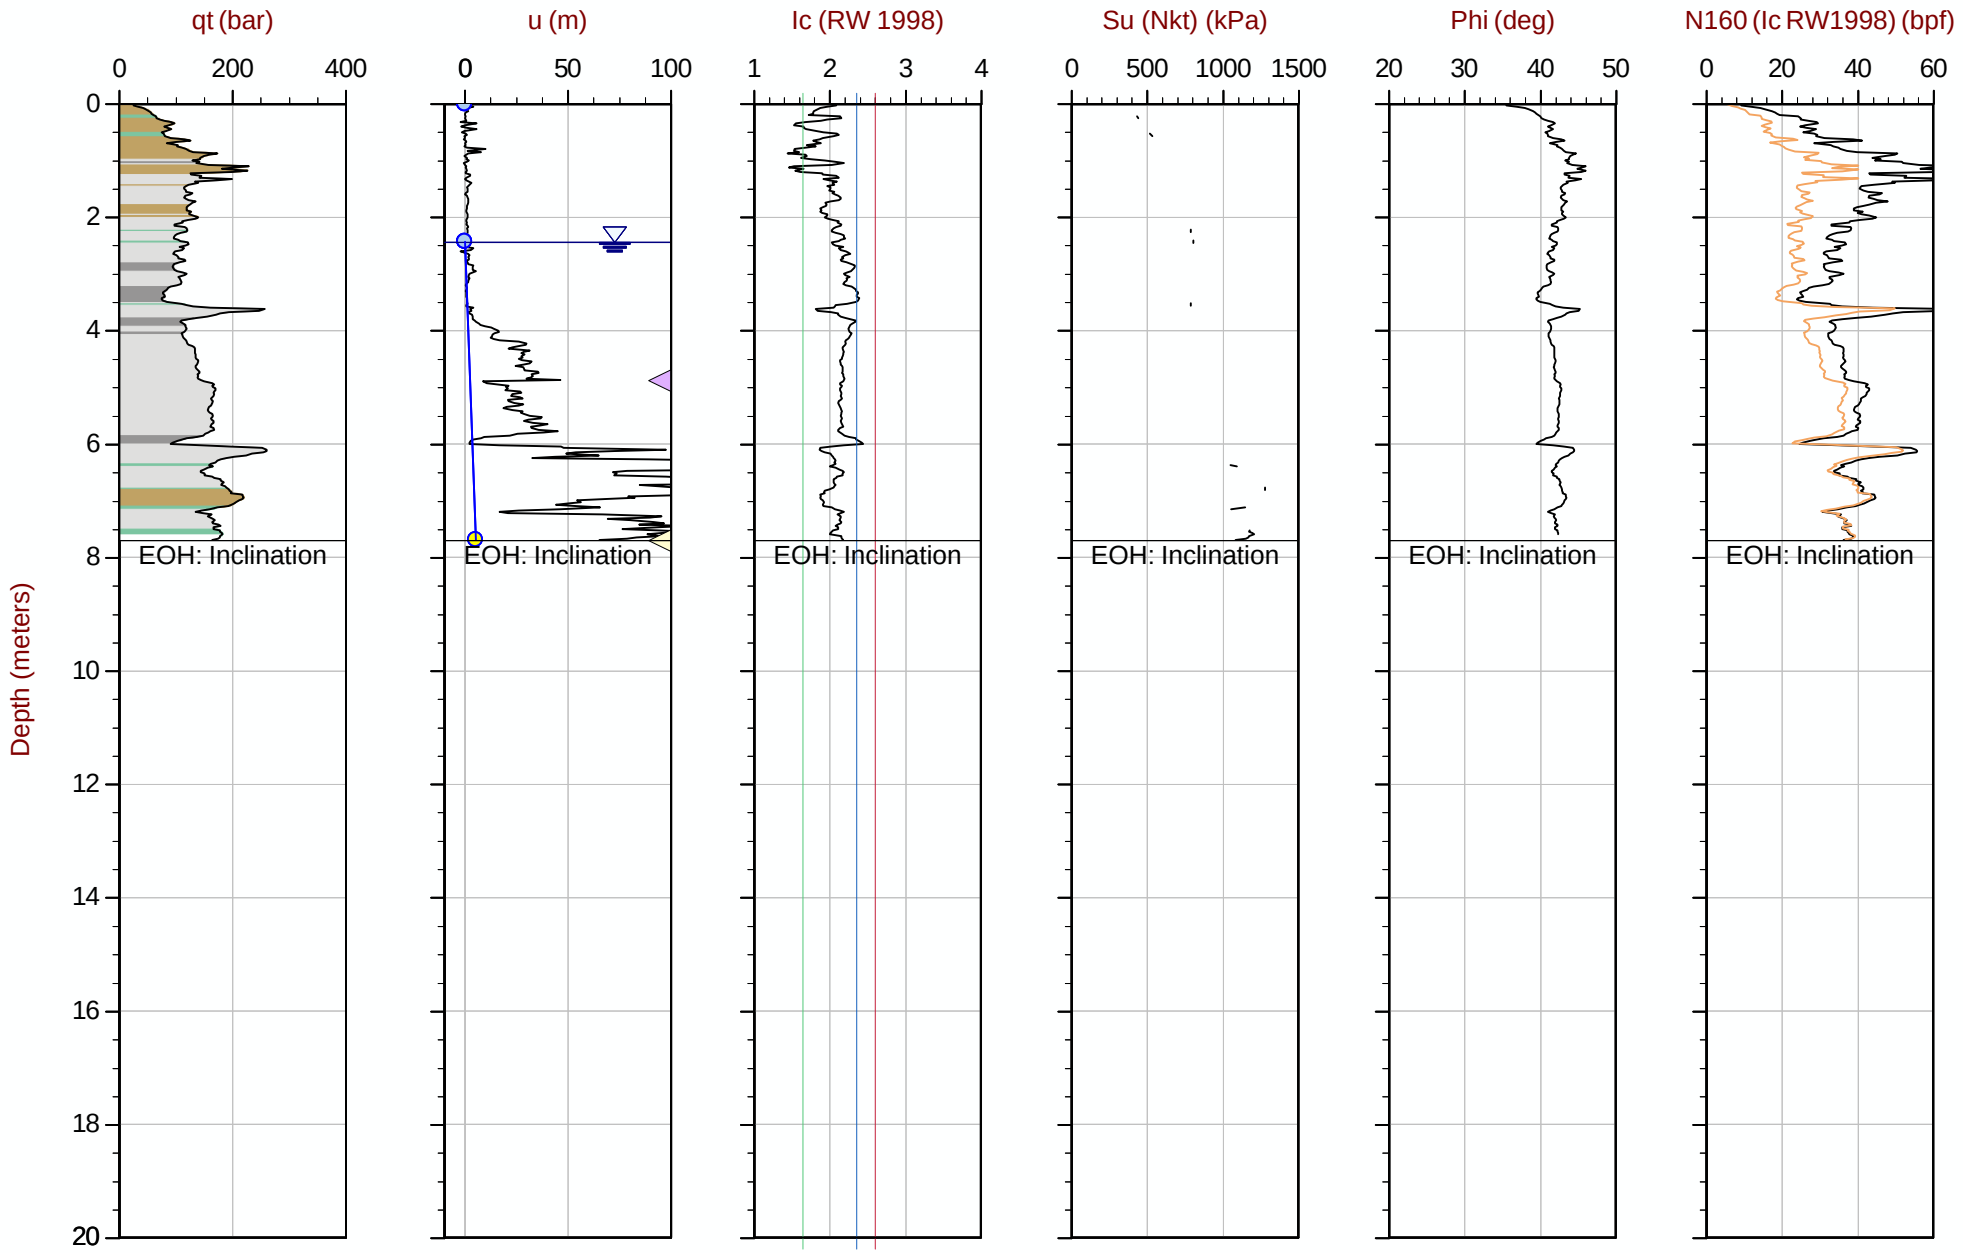

Max Depth: 7.700 m / 25.26 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT111.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612593m E: 414769m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 11:55
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT112
Cone: 750:T1500F15U35 Area= 15cm2

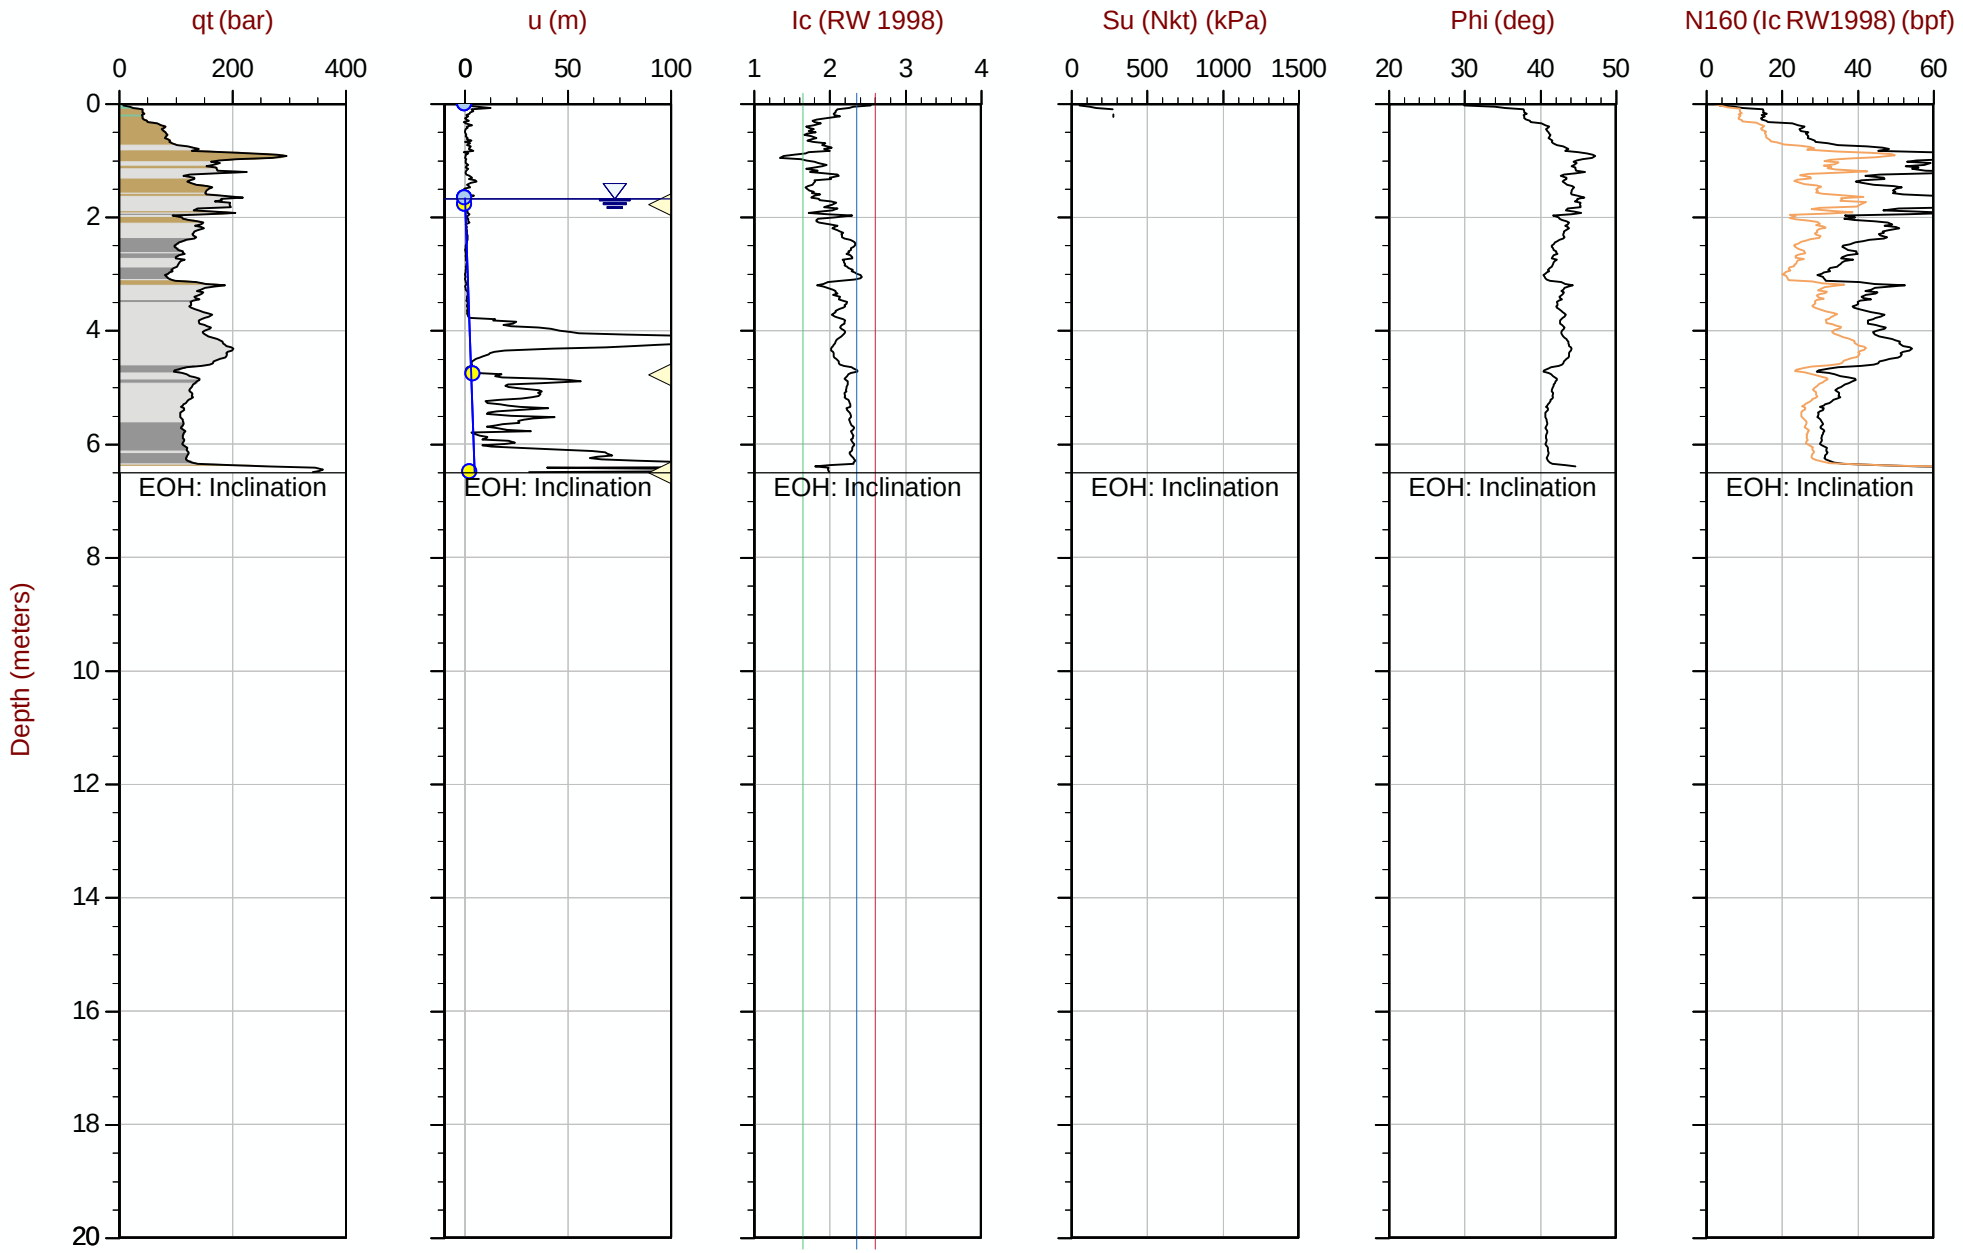

Max Depth: 6.500 m / 21.33 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT112.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612592m E: 414871m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 08:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT113
Cone: 750:T1500F15U35 Area= 15cm2

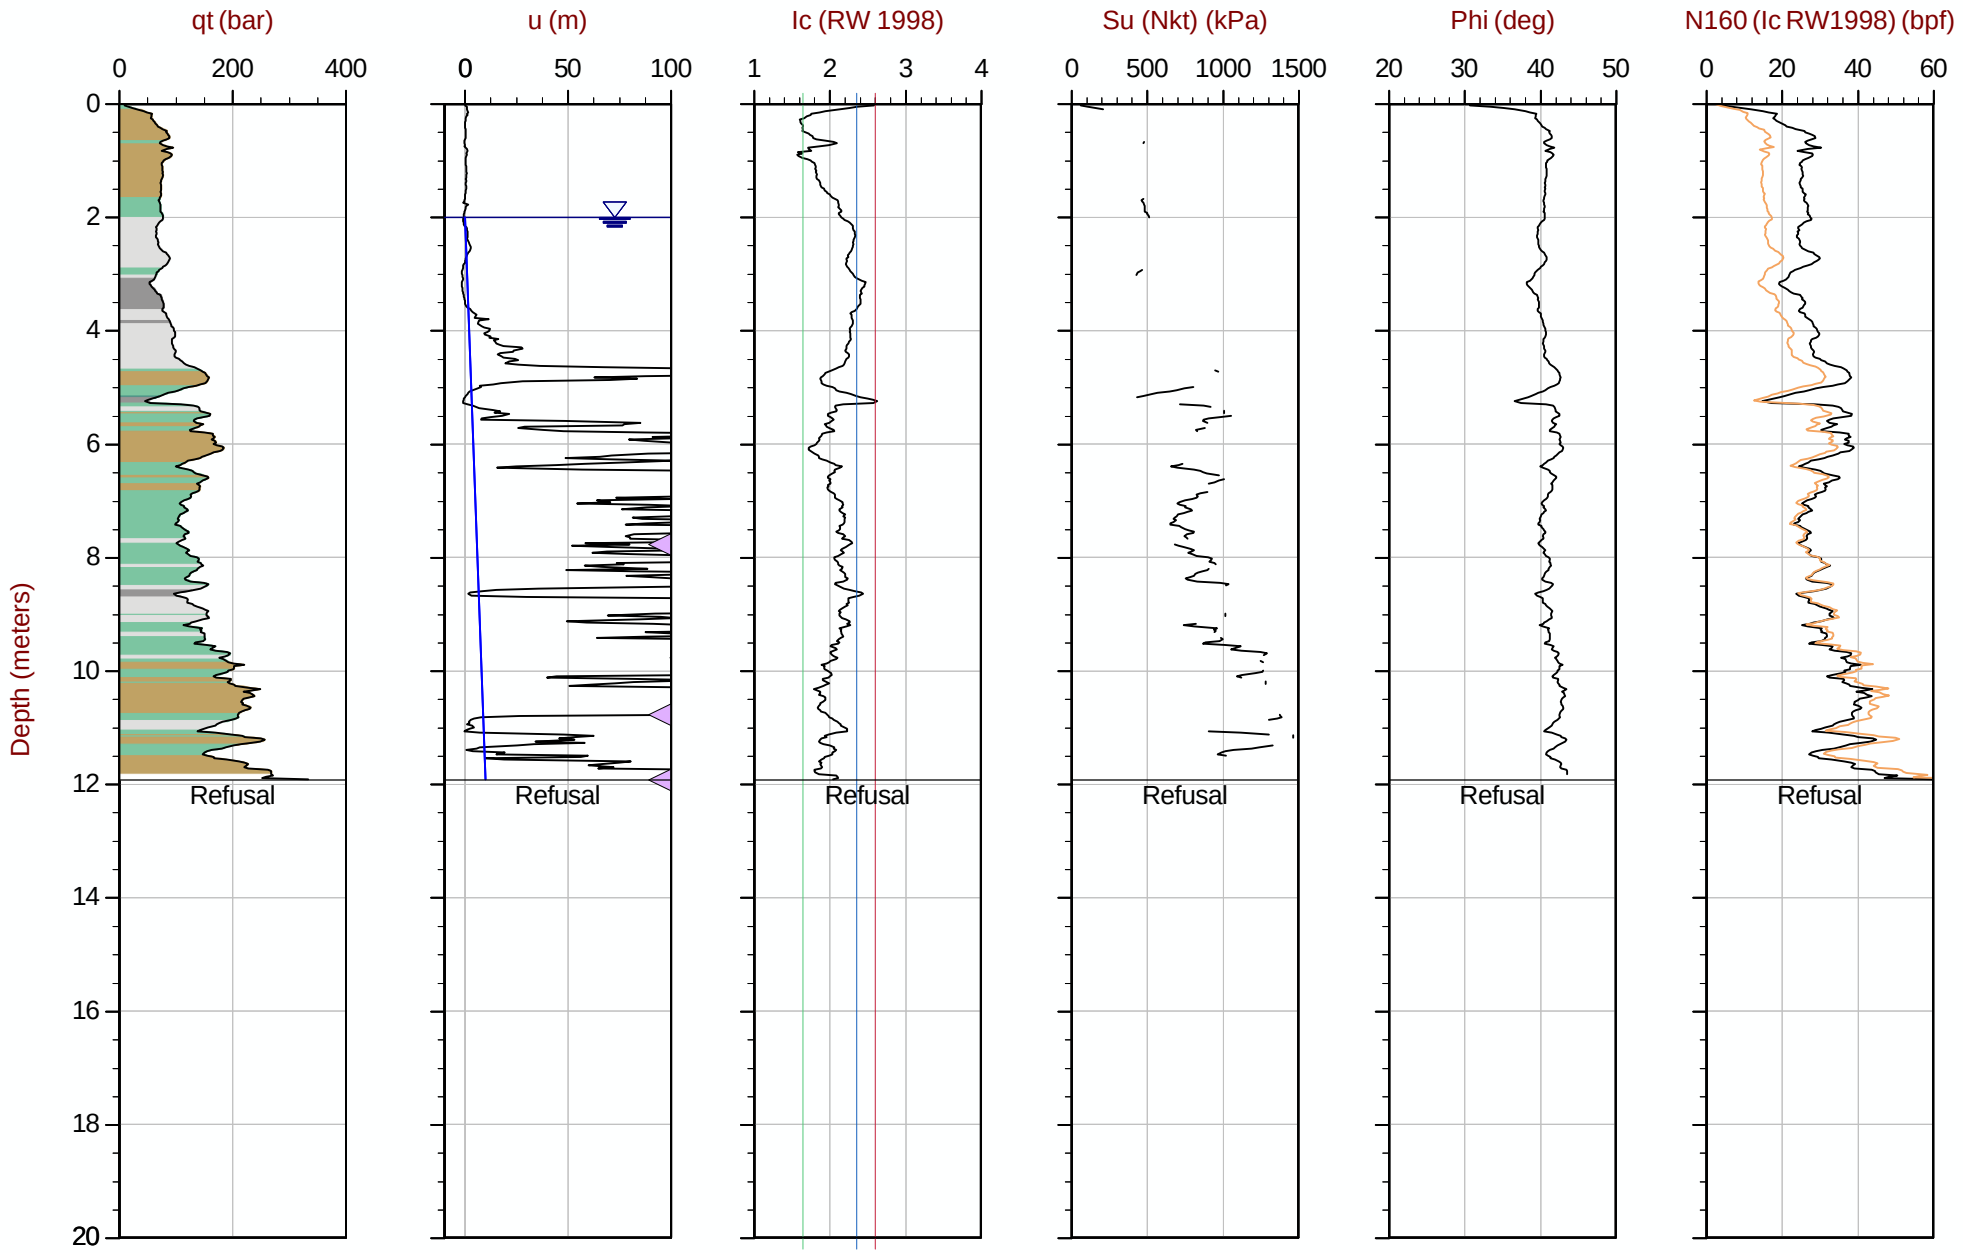

Max Depth: 11.925 m / 39.12 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT113.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612590m E: 414971m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 10:49
Site: Brooks, Alberta

Sounding: RCPT22-22CPT114
Cone: 750:T1500F15U35 Area= 15cm2

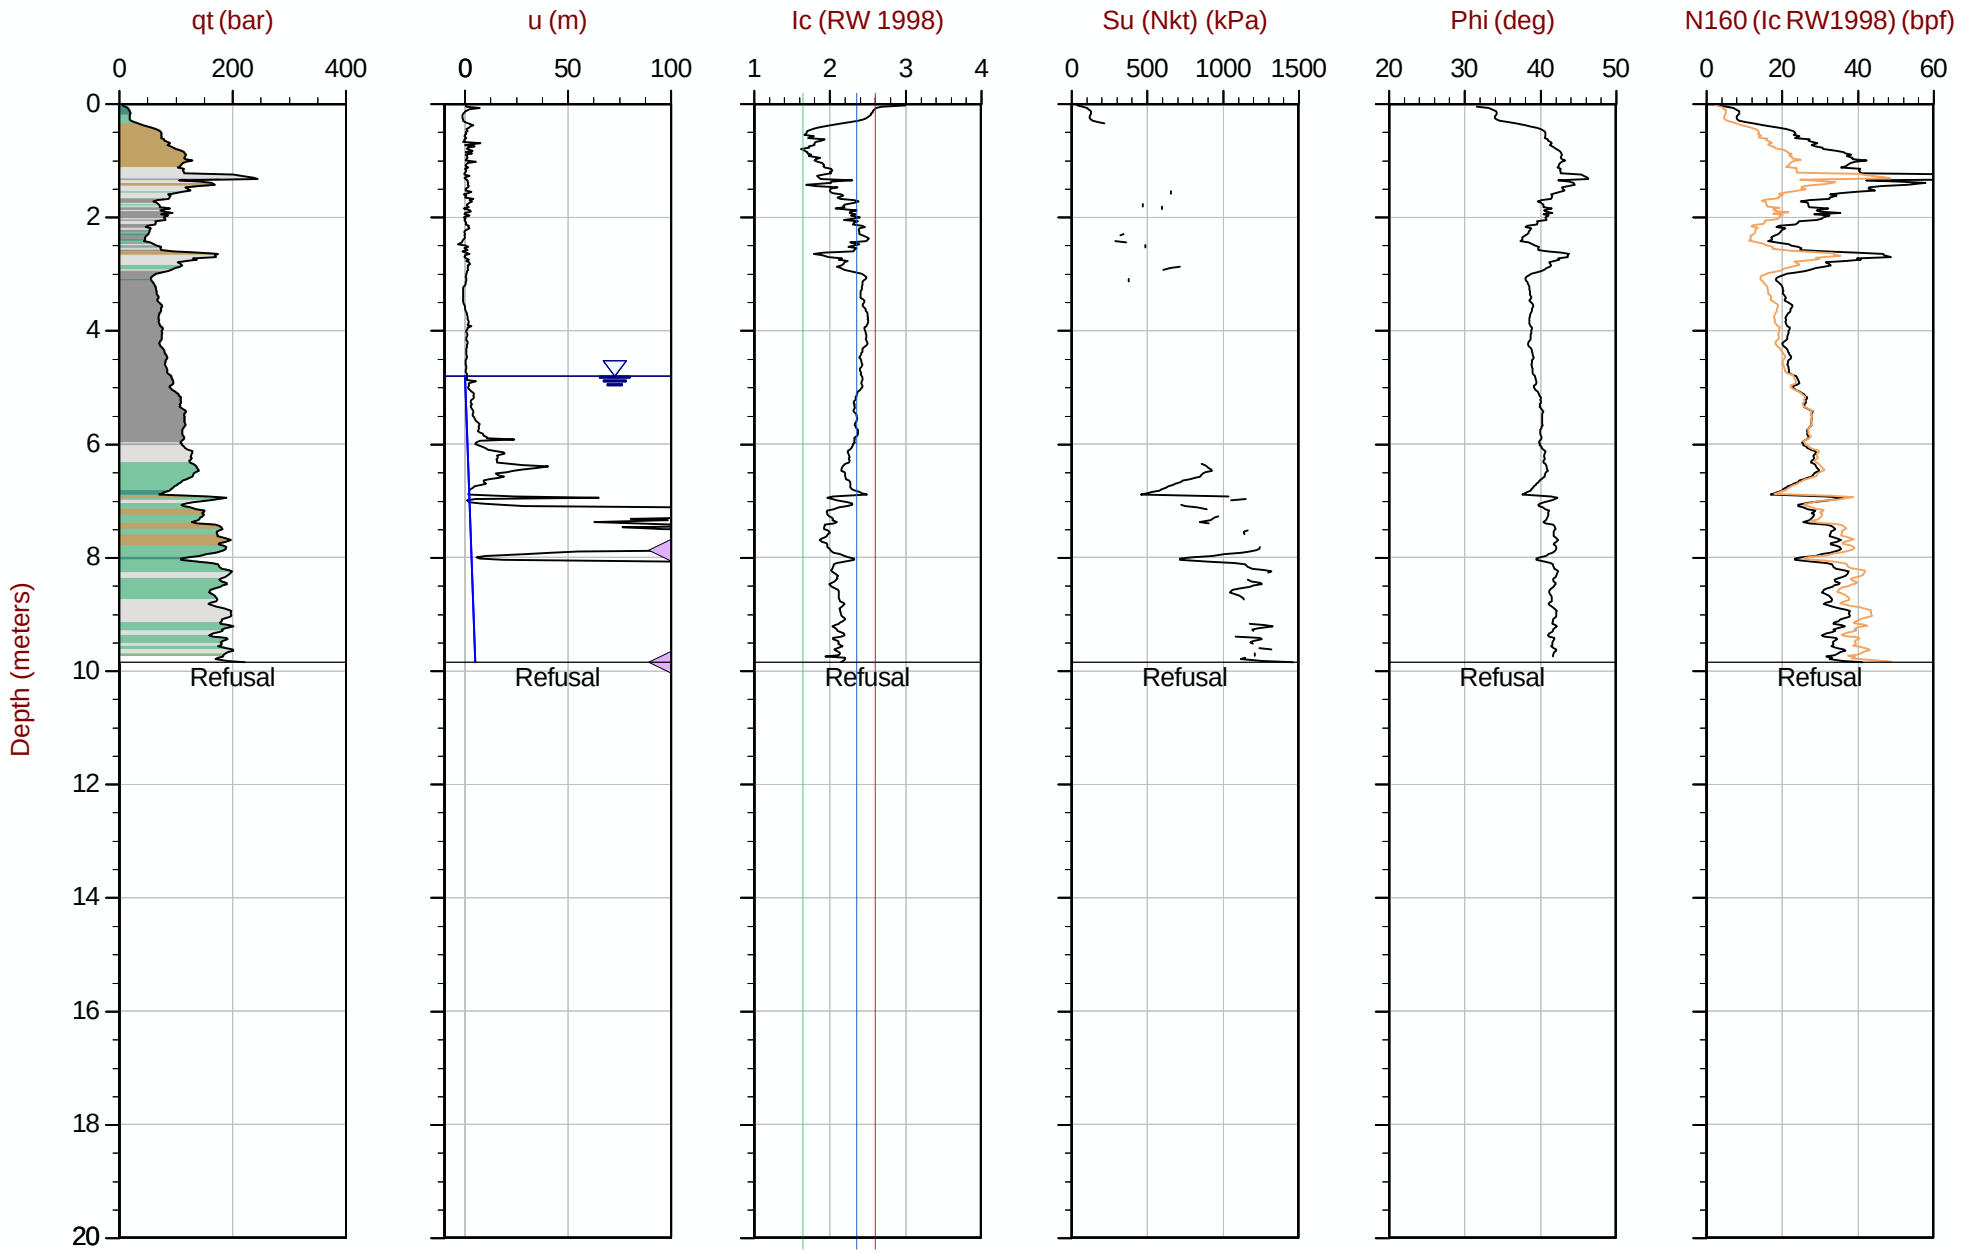

Max Depth: 9.850 m / 32.32 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT114.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612587m E: 415072m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 07:30
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT115
Cone: 822:T1000F10U35 Area= 15cm2

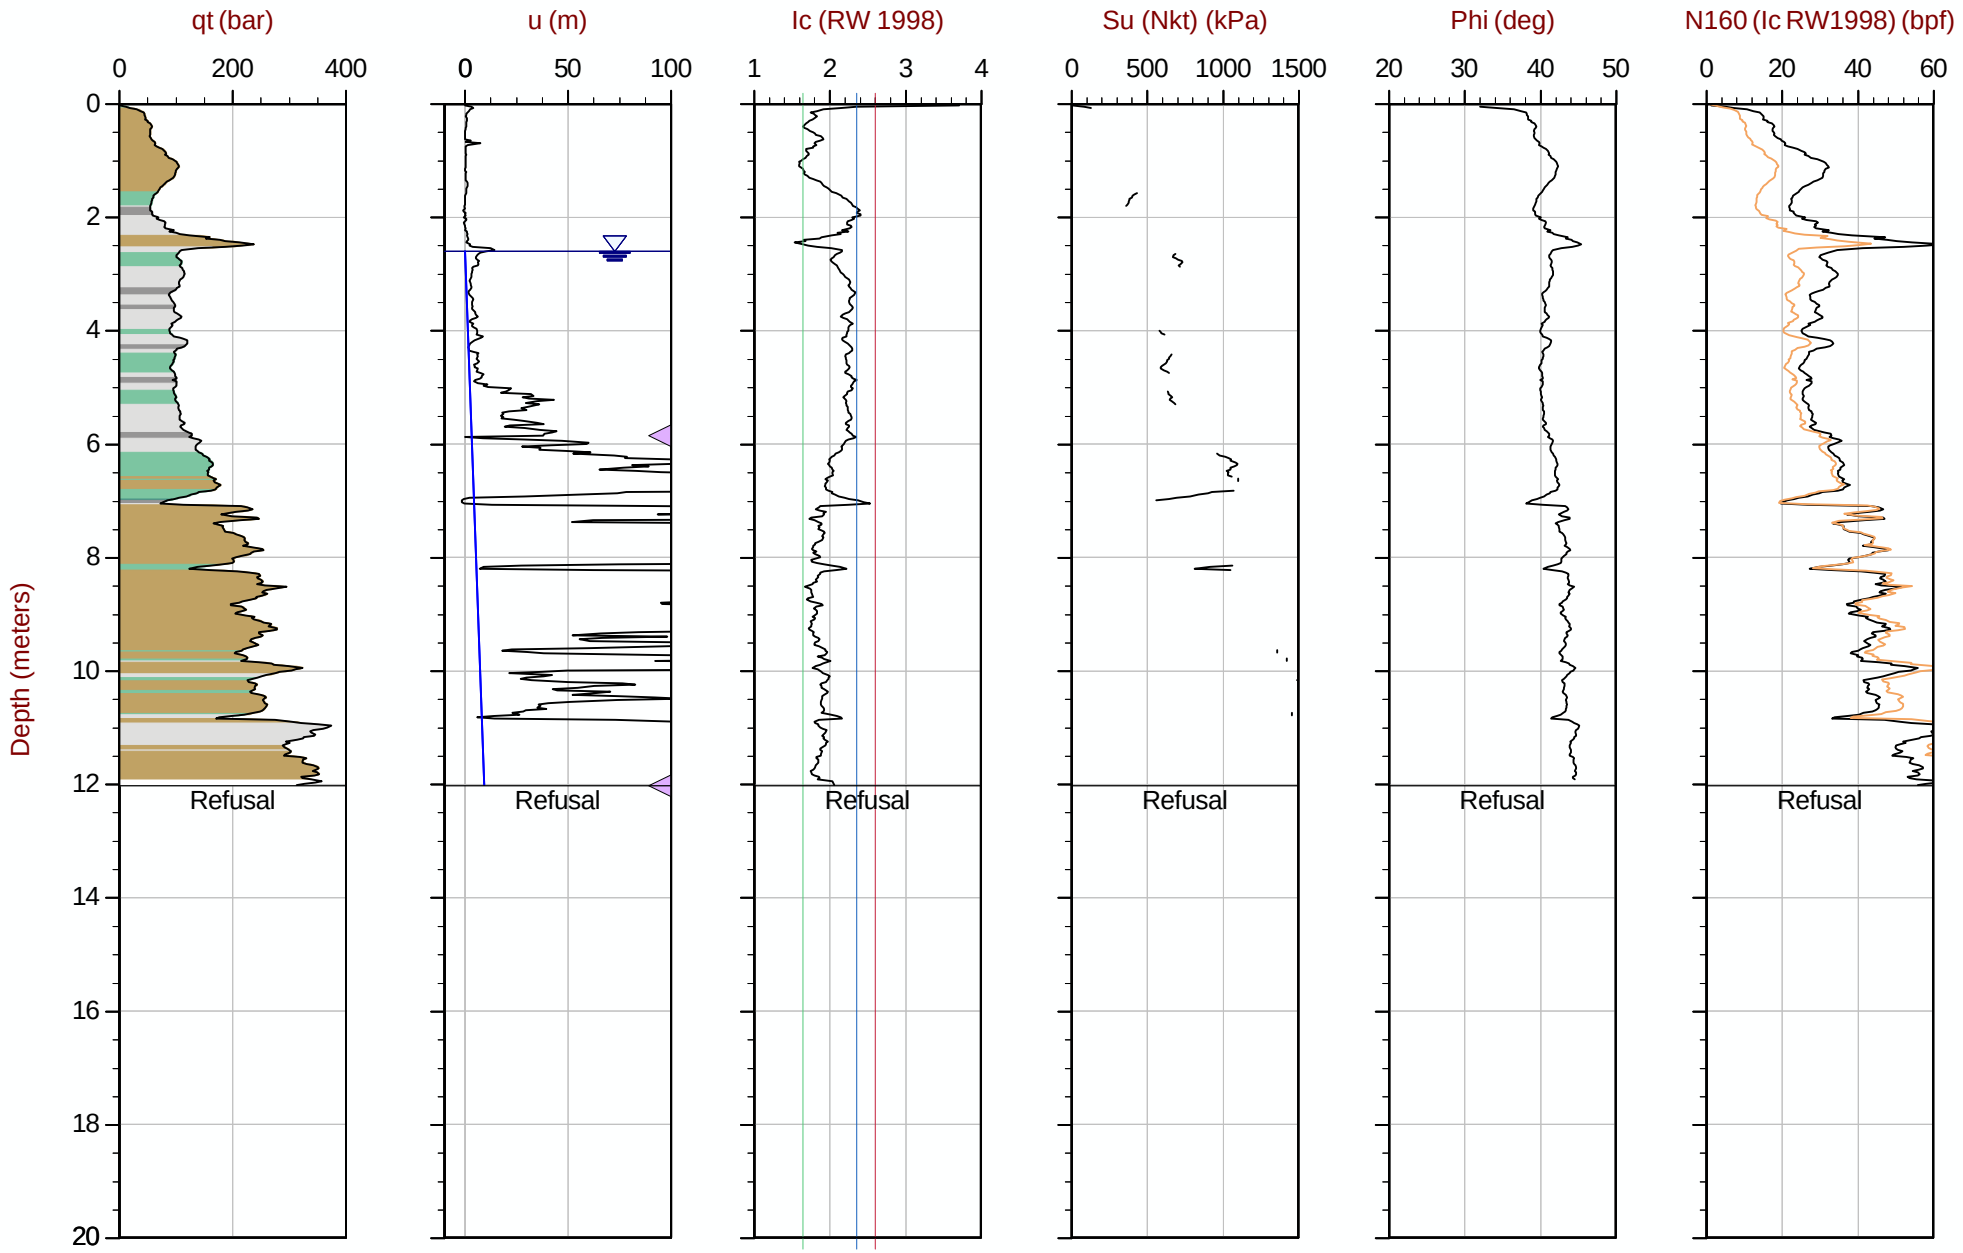

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT115.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612567m E: 415168m Elev: 776.263m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 16:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT117
Cone: 822:T1000F10U35 Area= 15cm2

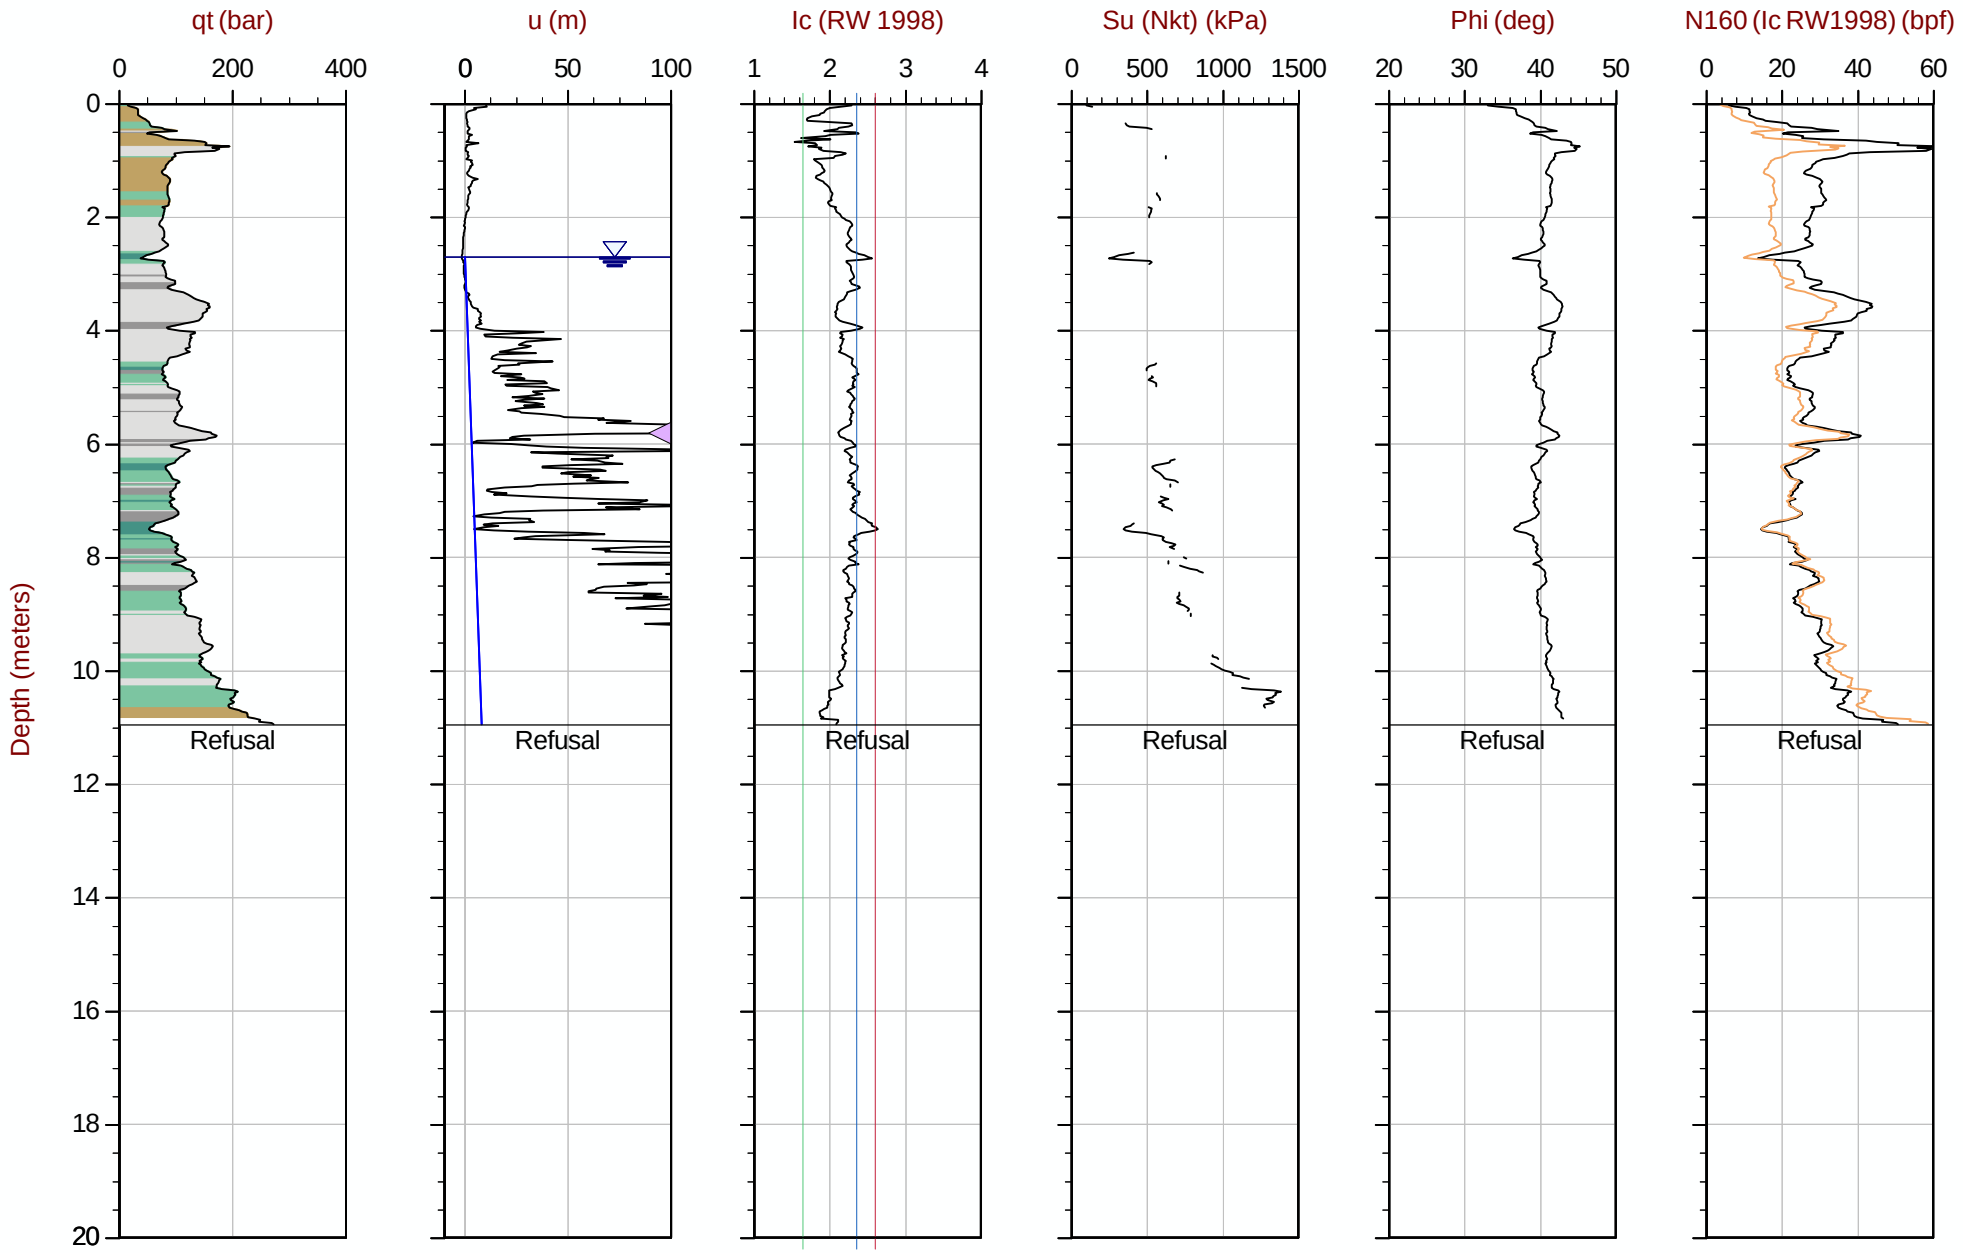

Max Depth: 10.950 m / 35.92 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT117.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612565m E: 415269m Elev: 775.224m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 08:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT118
Cone: 750:T1500F15U35 Area= 15cm2

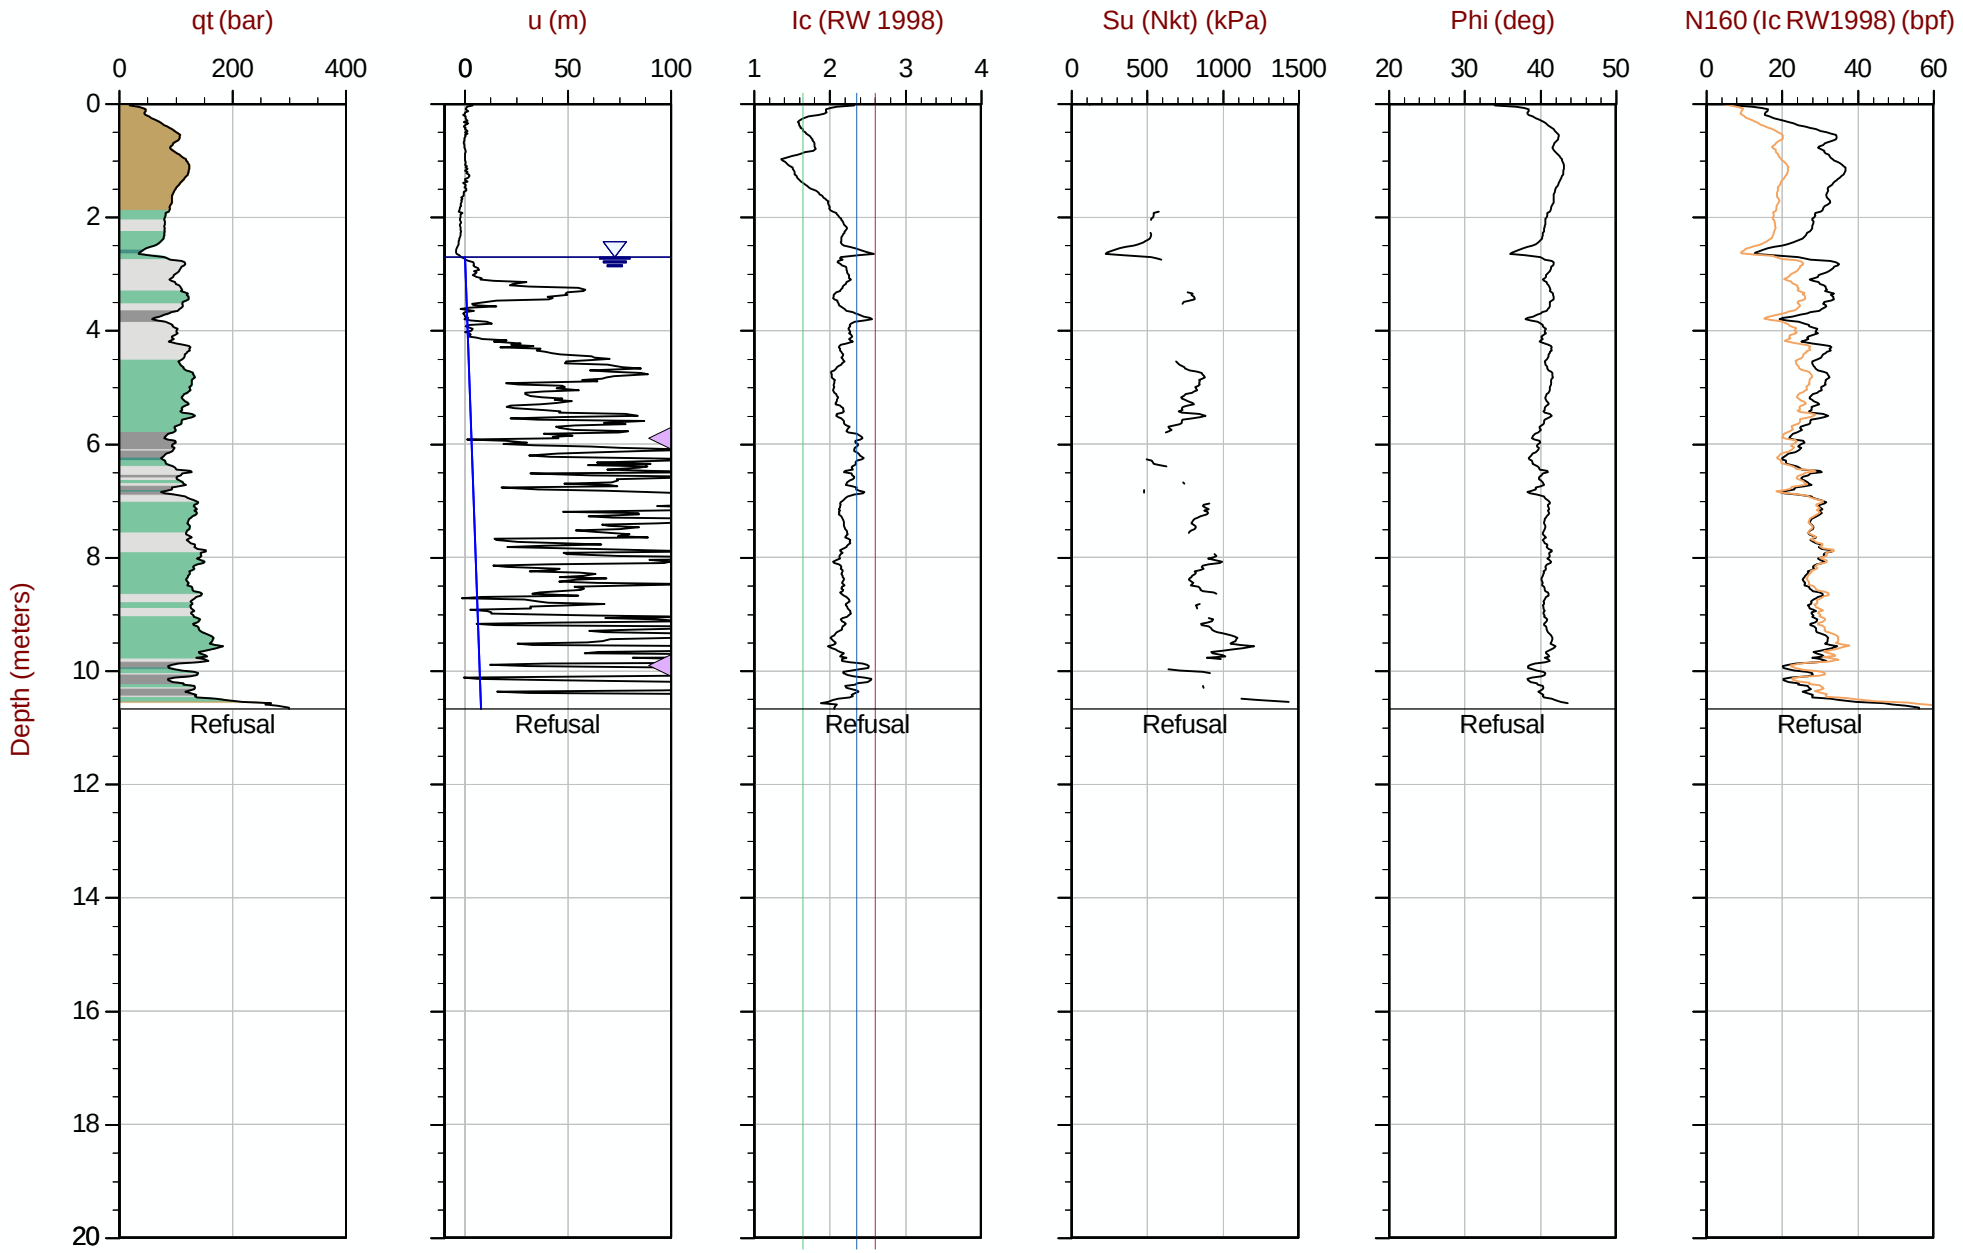

Max Depth: 10.675 m / 35.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT118.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612565m E: 415321m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 07:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT119
Cone: 750:T1500F15U35 Area= 15cm2

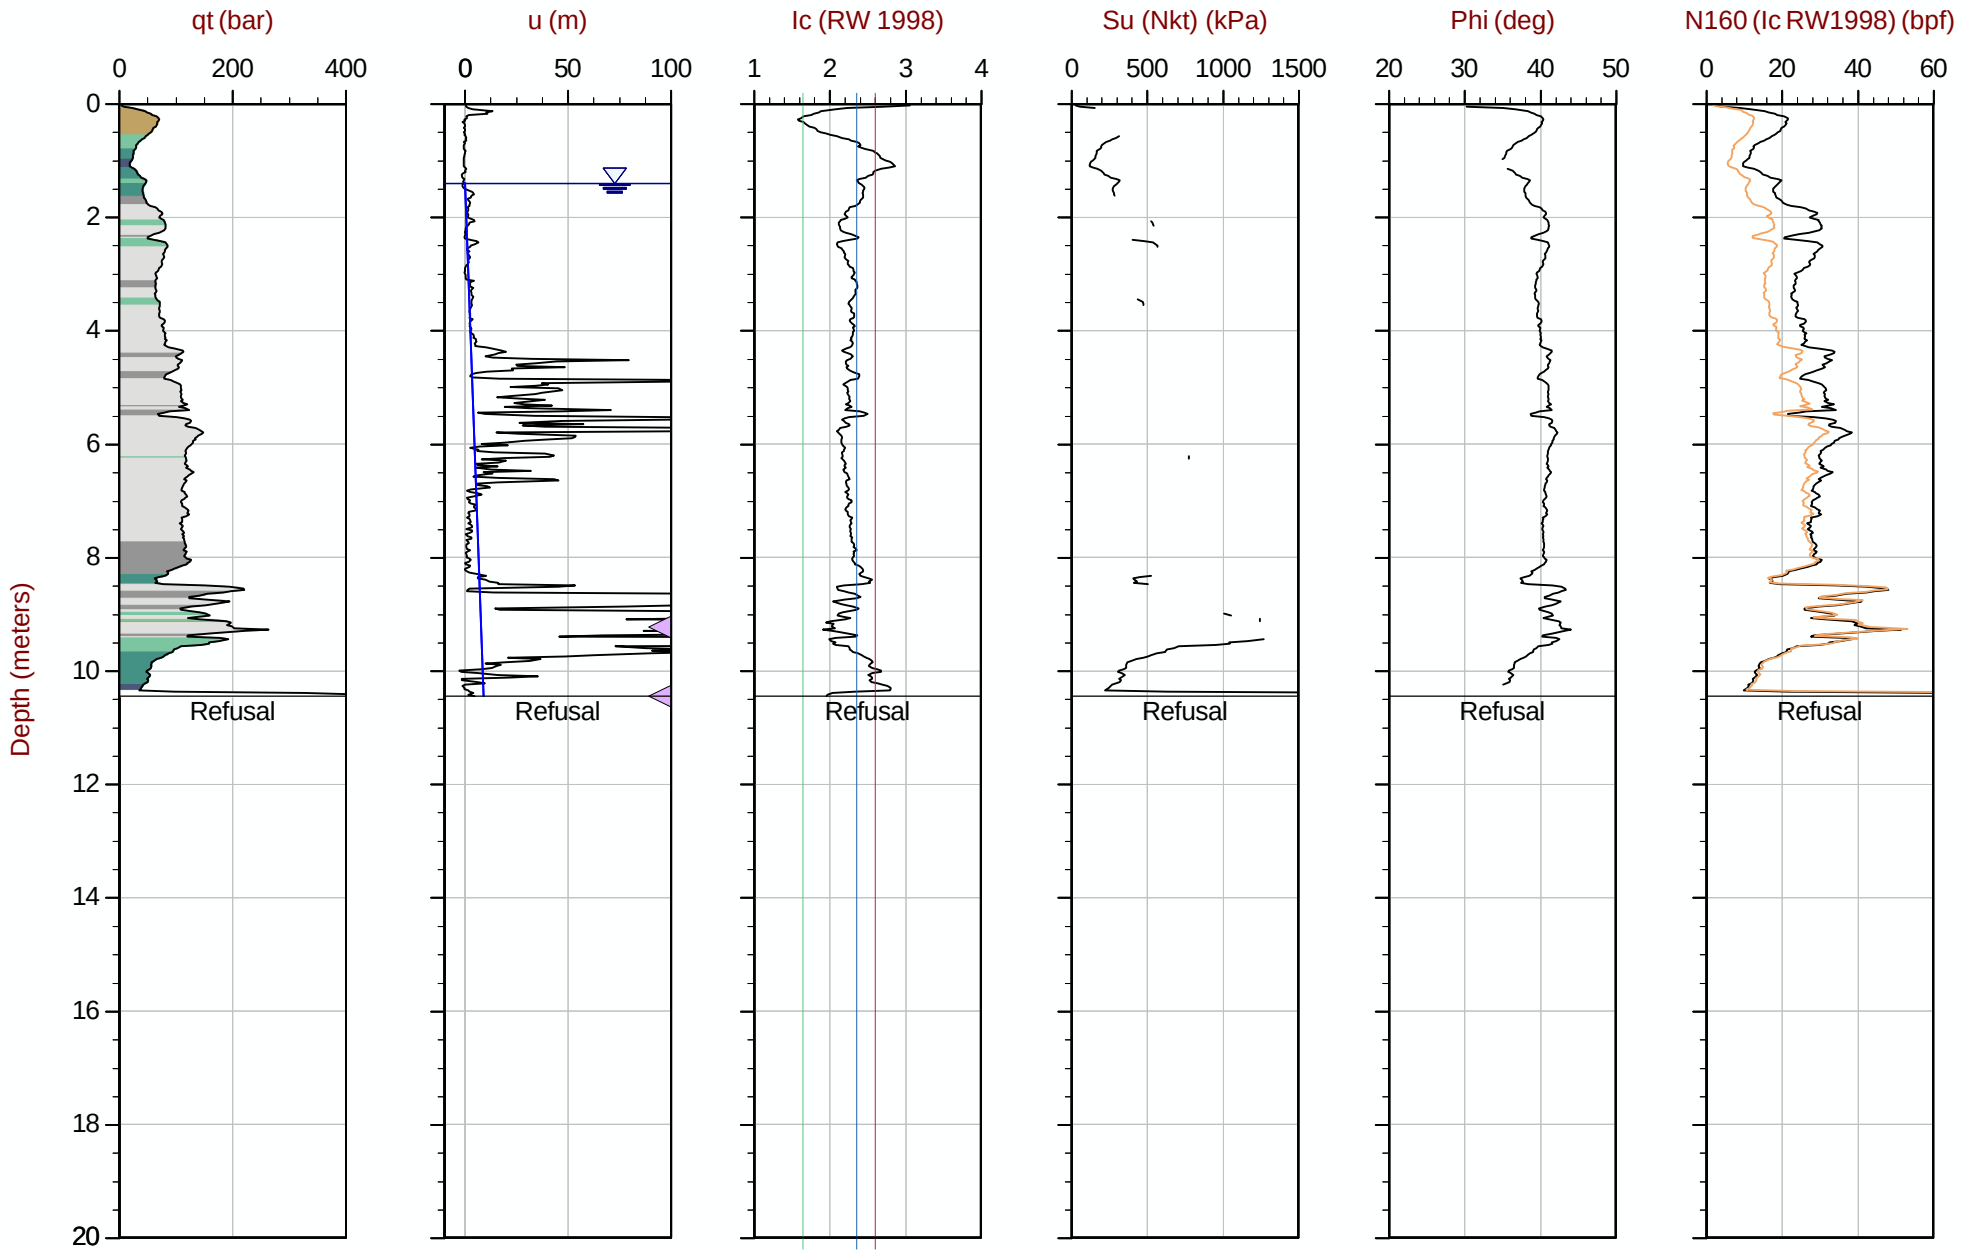

Max Depth: 10.450 m / 34.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT119.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612561m E: 415369m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 16:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT120
Cone: 750:T1500F15U35 Area= 15cm2

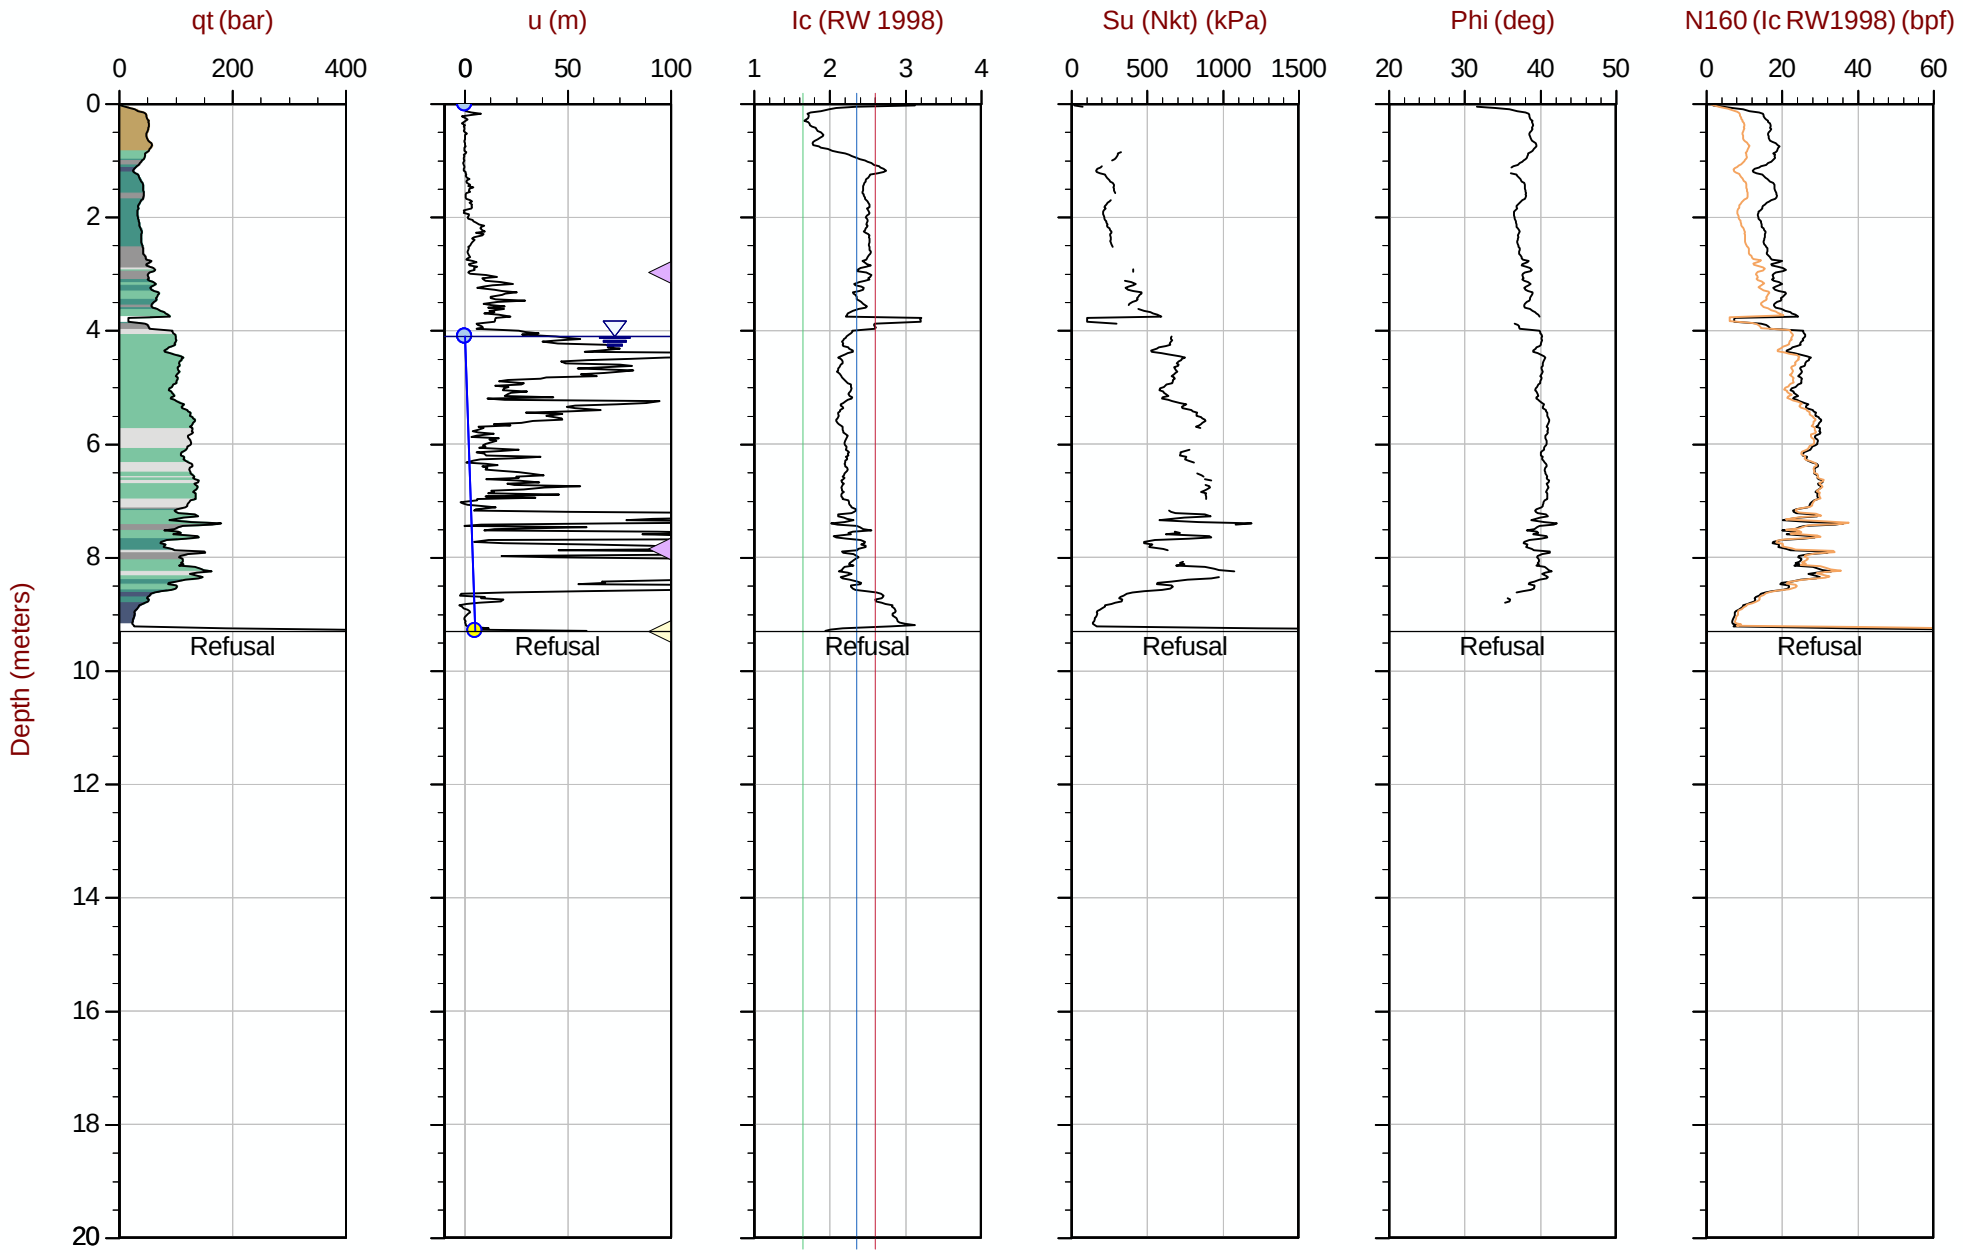

Max Depth: 9.300 m / 30.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT120.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612553m E: 415421m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 15:53
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT121
Cone: 750:T1500F15U35 Area= 15cm2

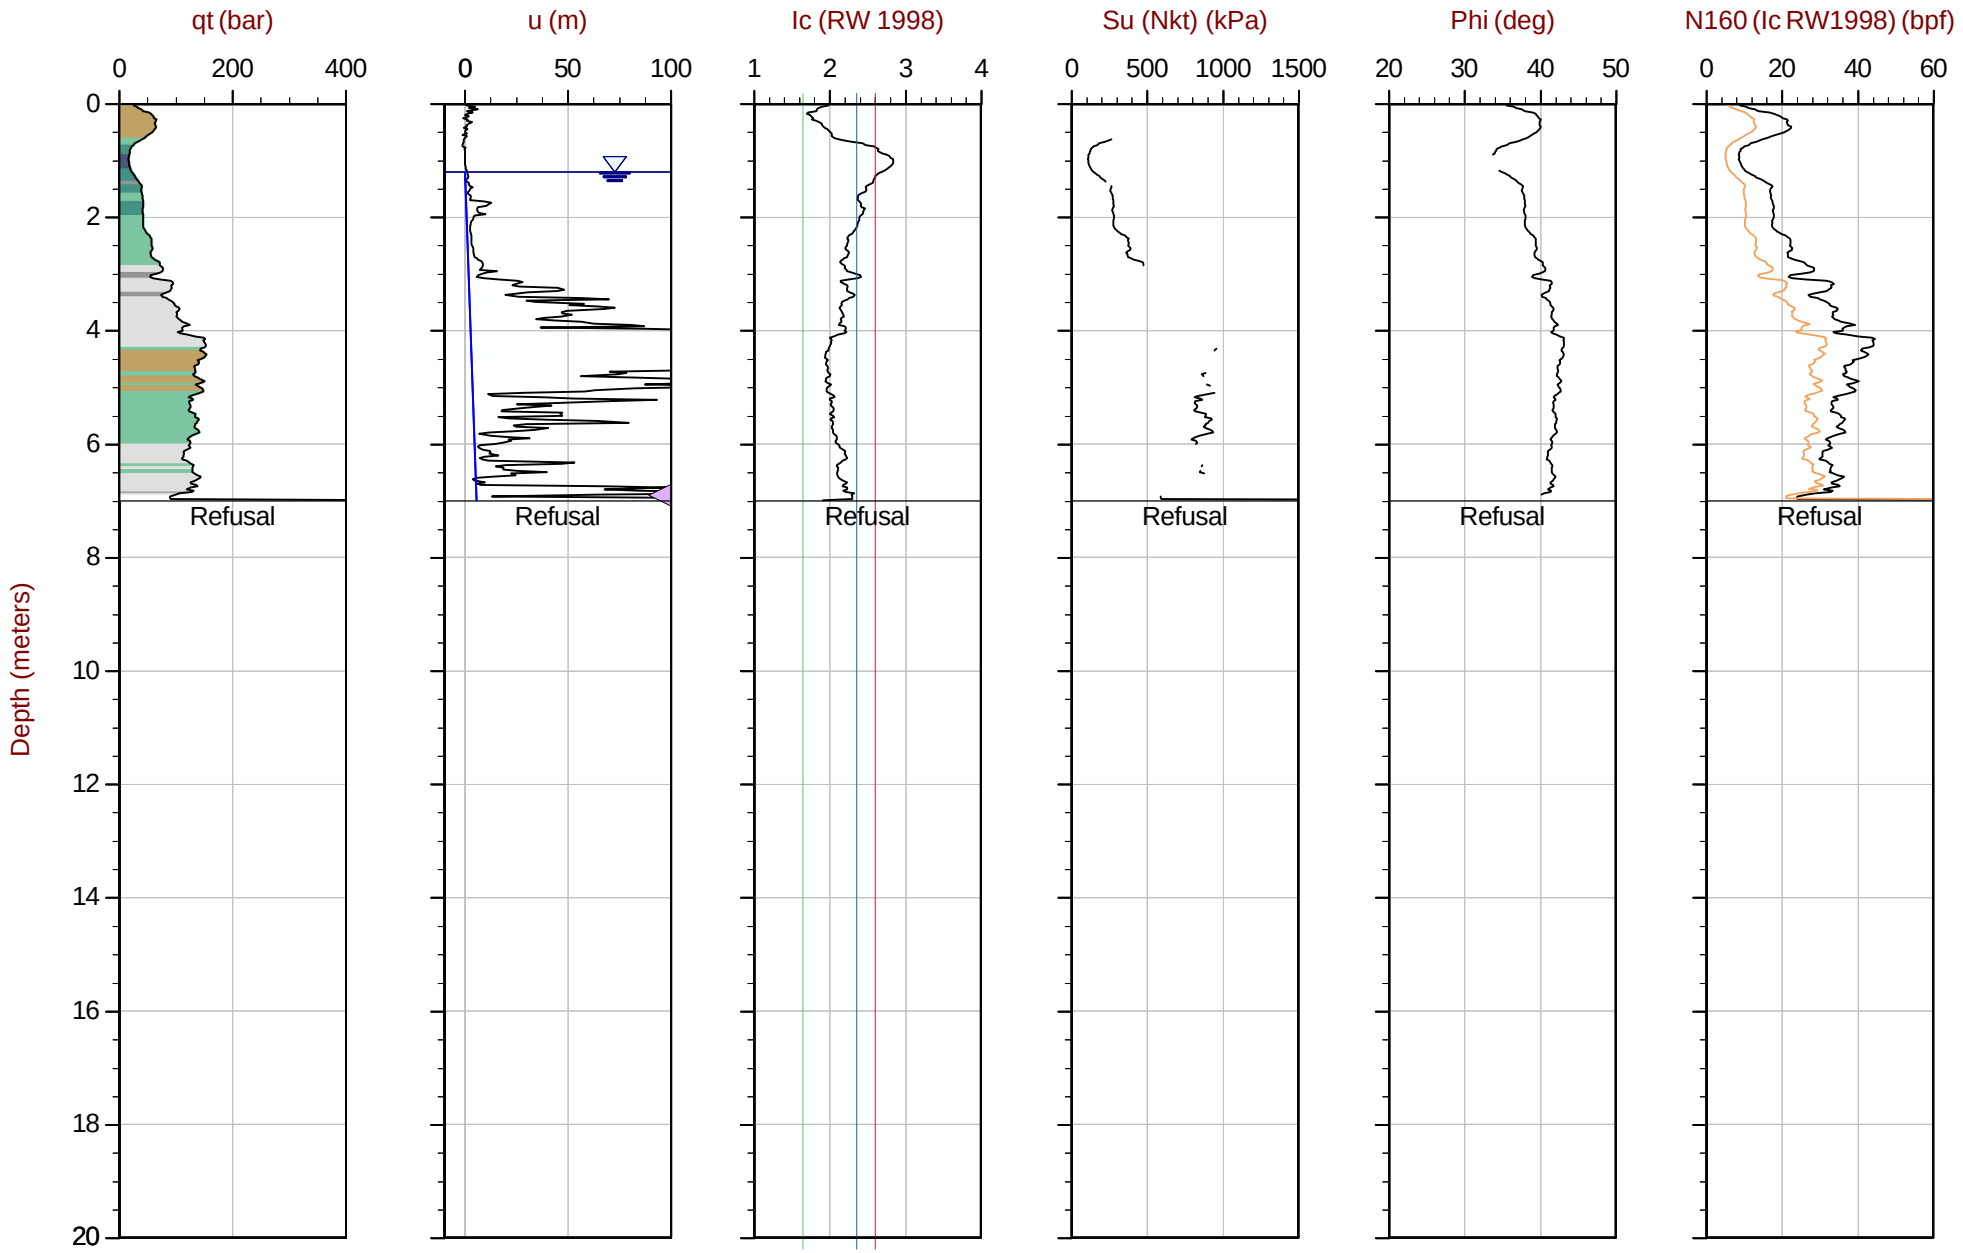

Max Depth: 7.000 m / 22.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT121.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612552m E: 415467m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 15:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT122
Cone: 822:T1000F10U35 Area= 15cm2

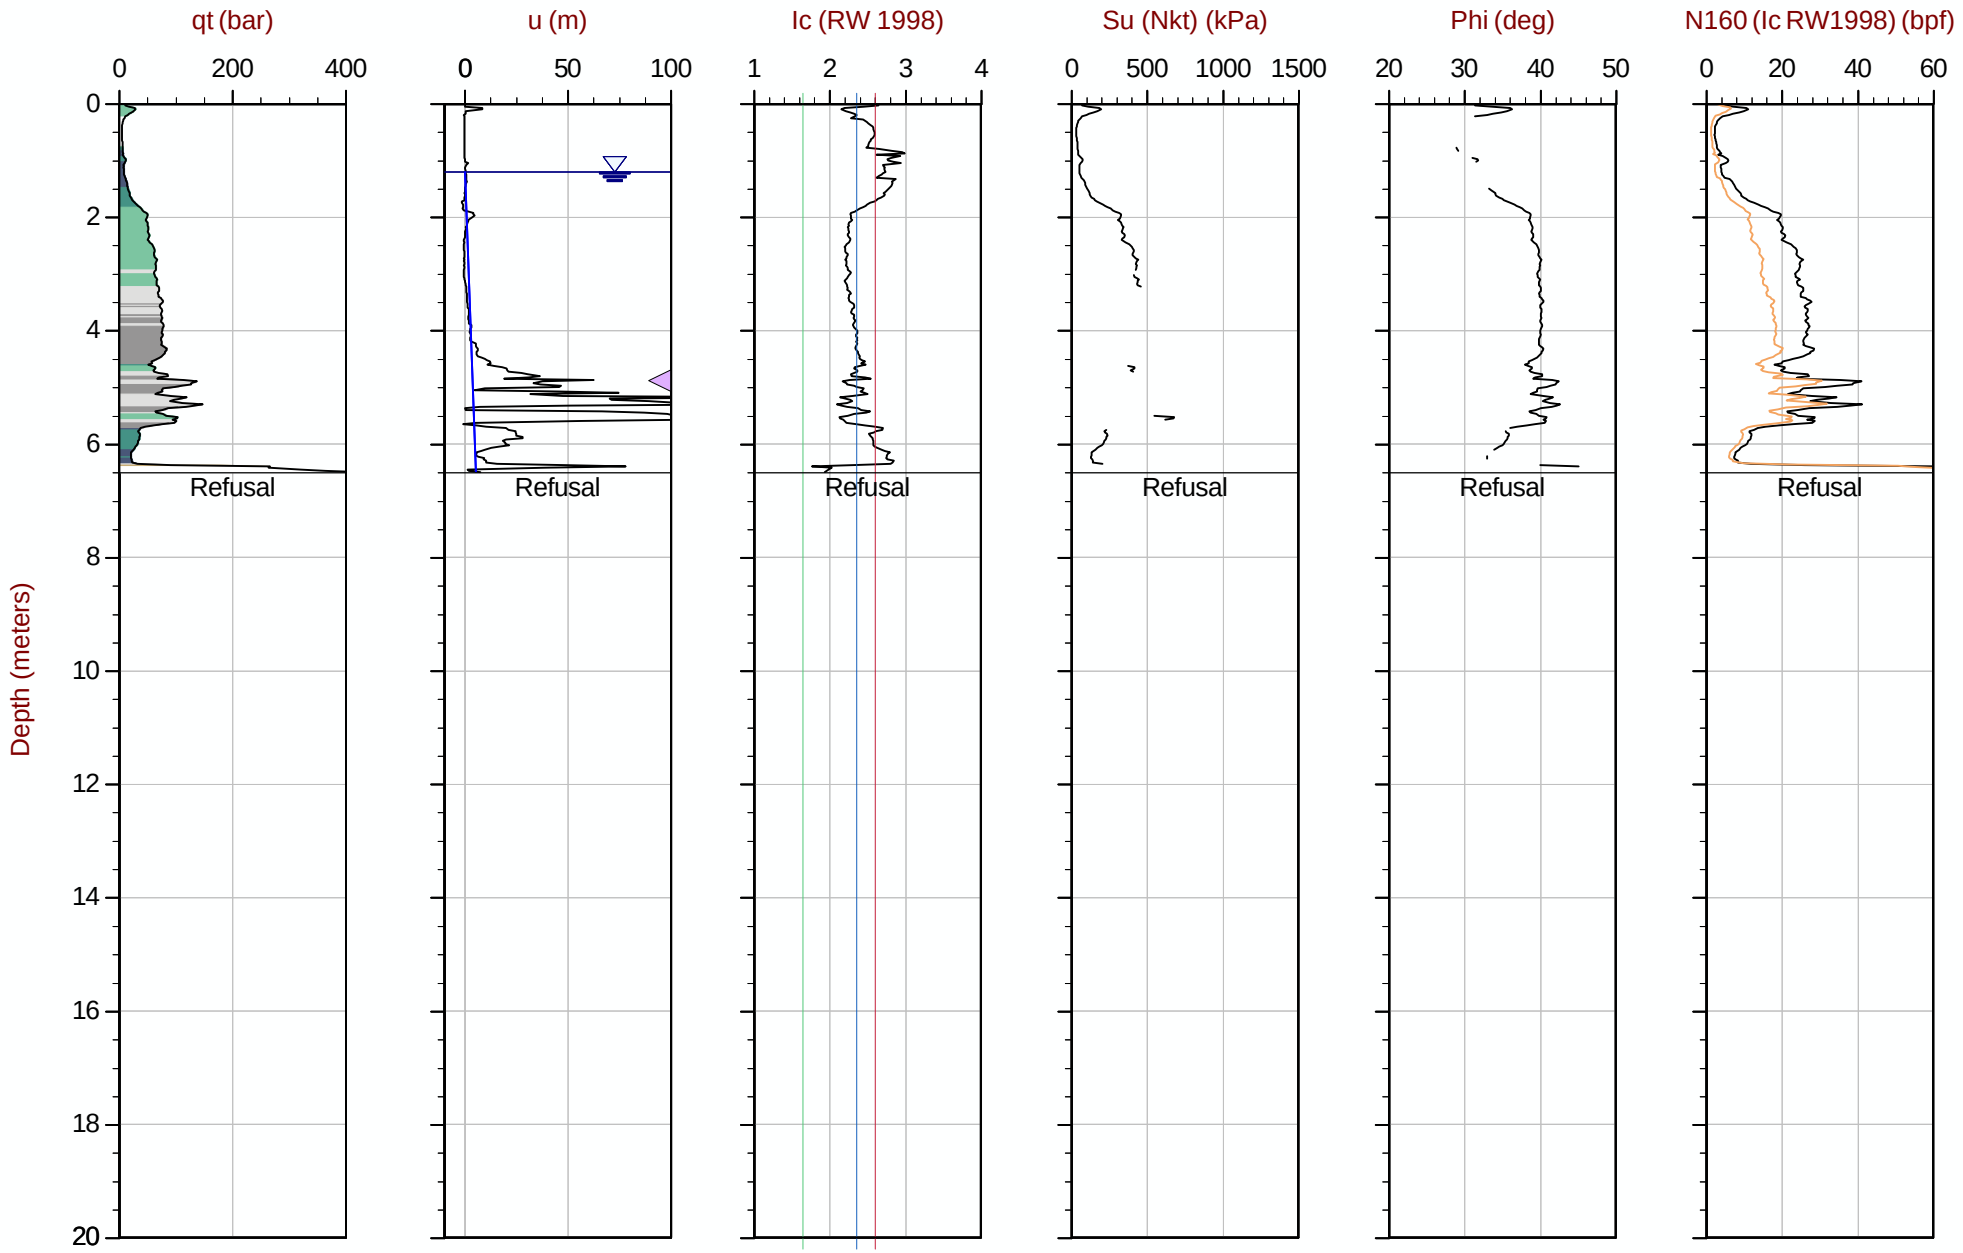

Max Depth: 6.500 m / 21.33 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT122.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612546m E: 415510m Elev: 772.300m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 13:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT123
Cone: 822:T1000F10U35 Area= 15cm2

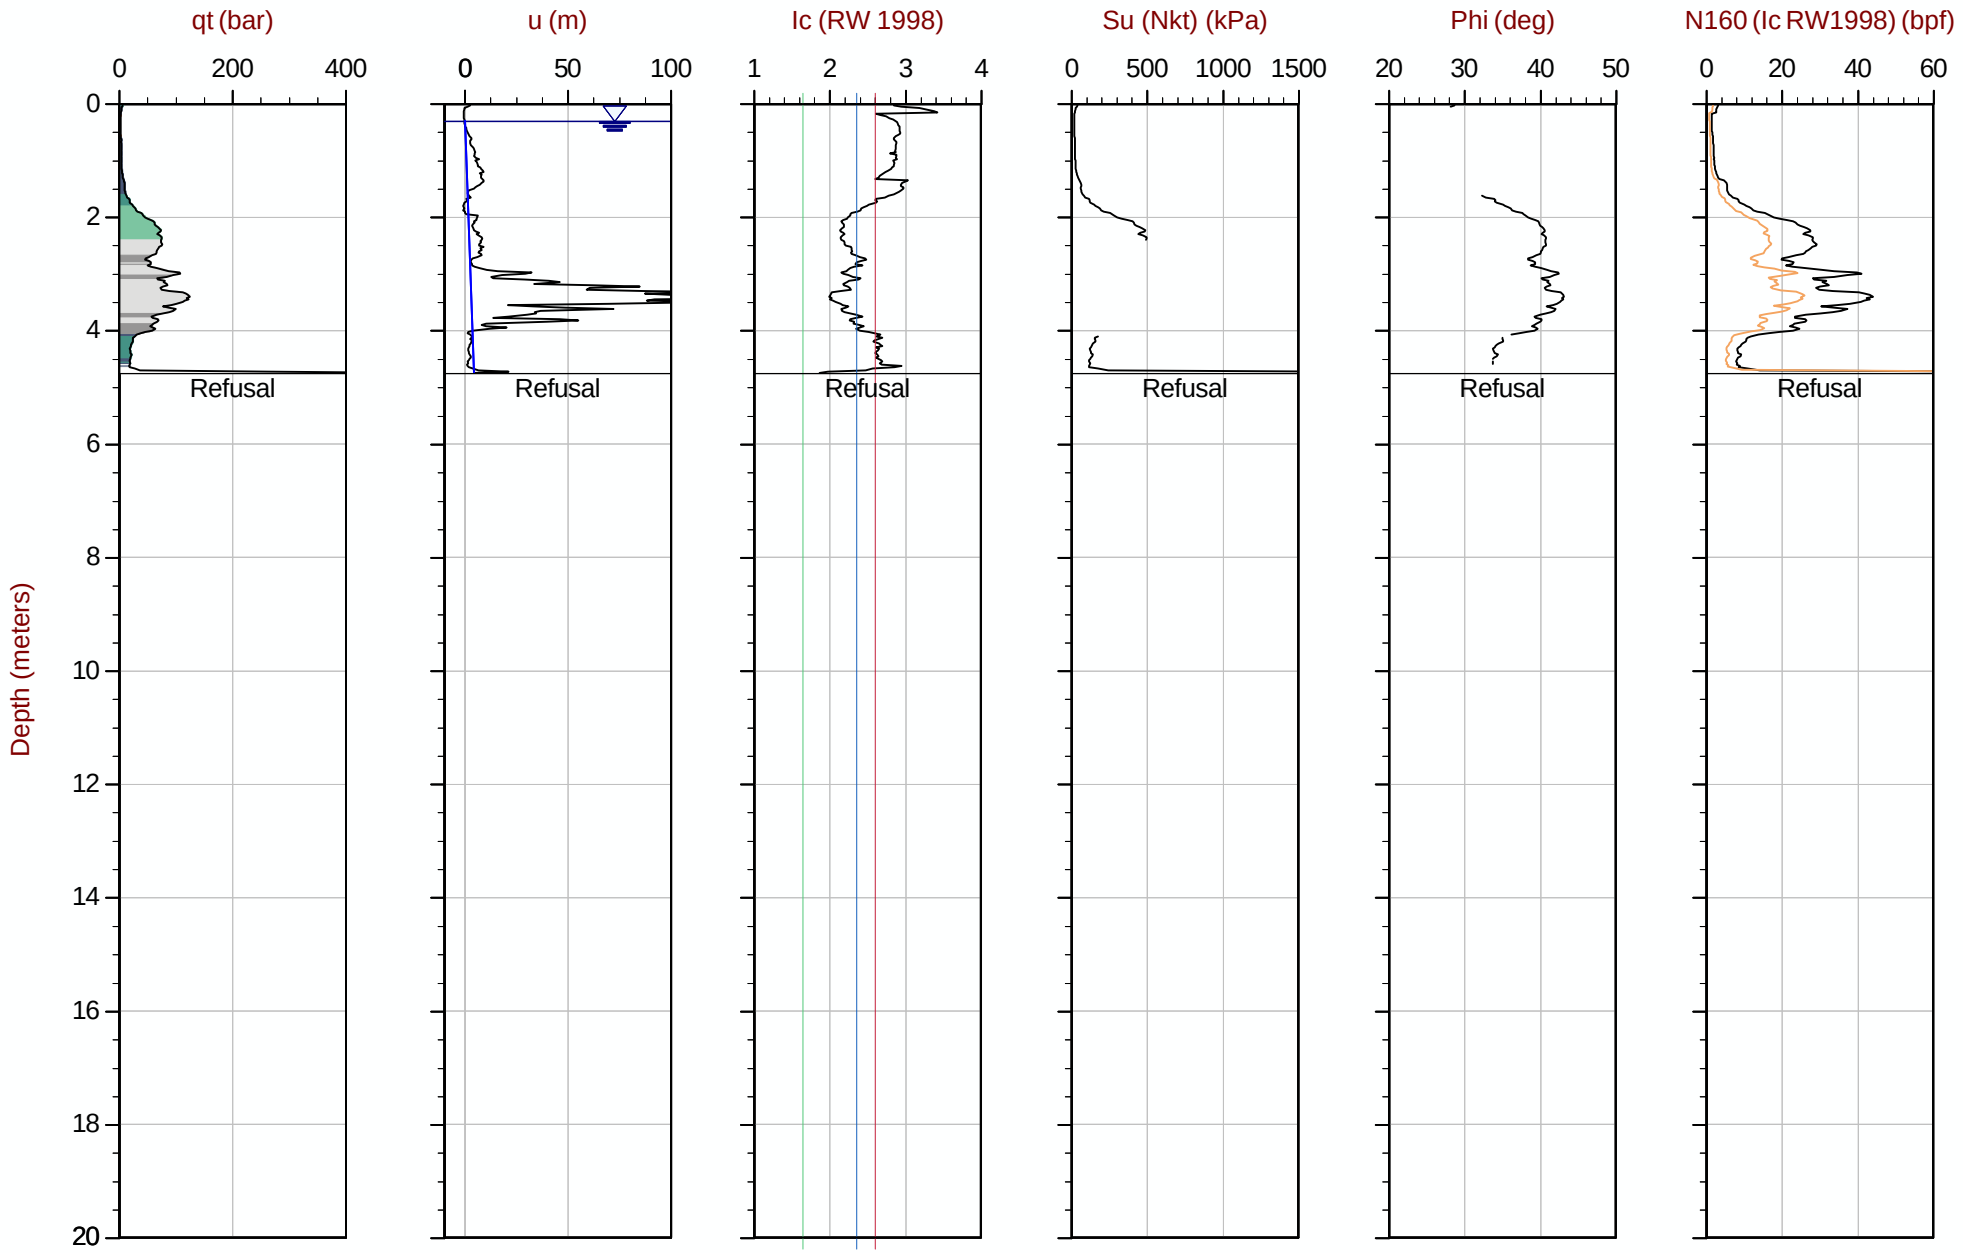

Max Depth: 4.750 m / 15.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT123.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612545m E: 415572m Elev: 771.601m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 13:29
Site: Brooks, Alberta

Sounding: RCPT22-22CPT123B
Cone: 822:T1000F10U35 Area= 15cm2

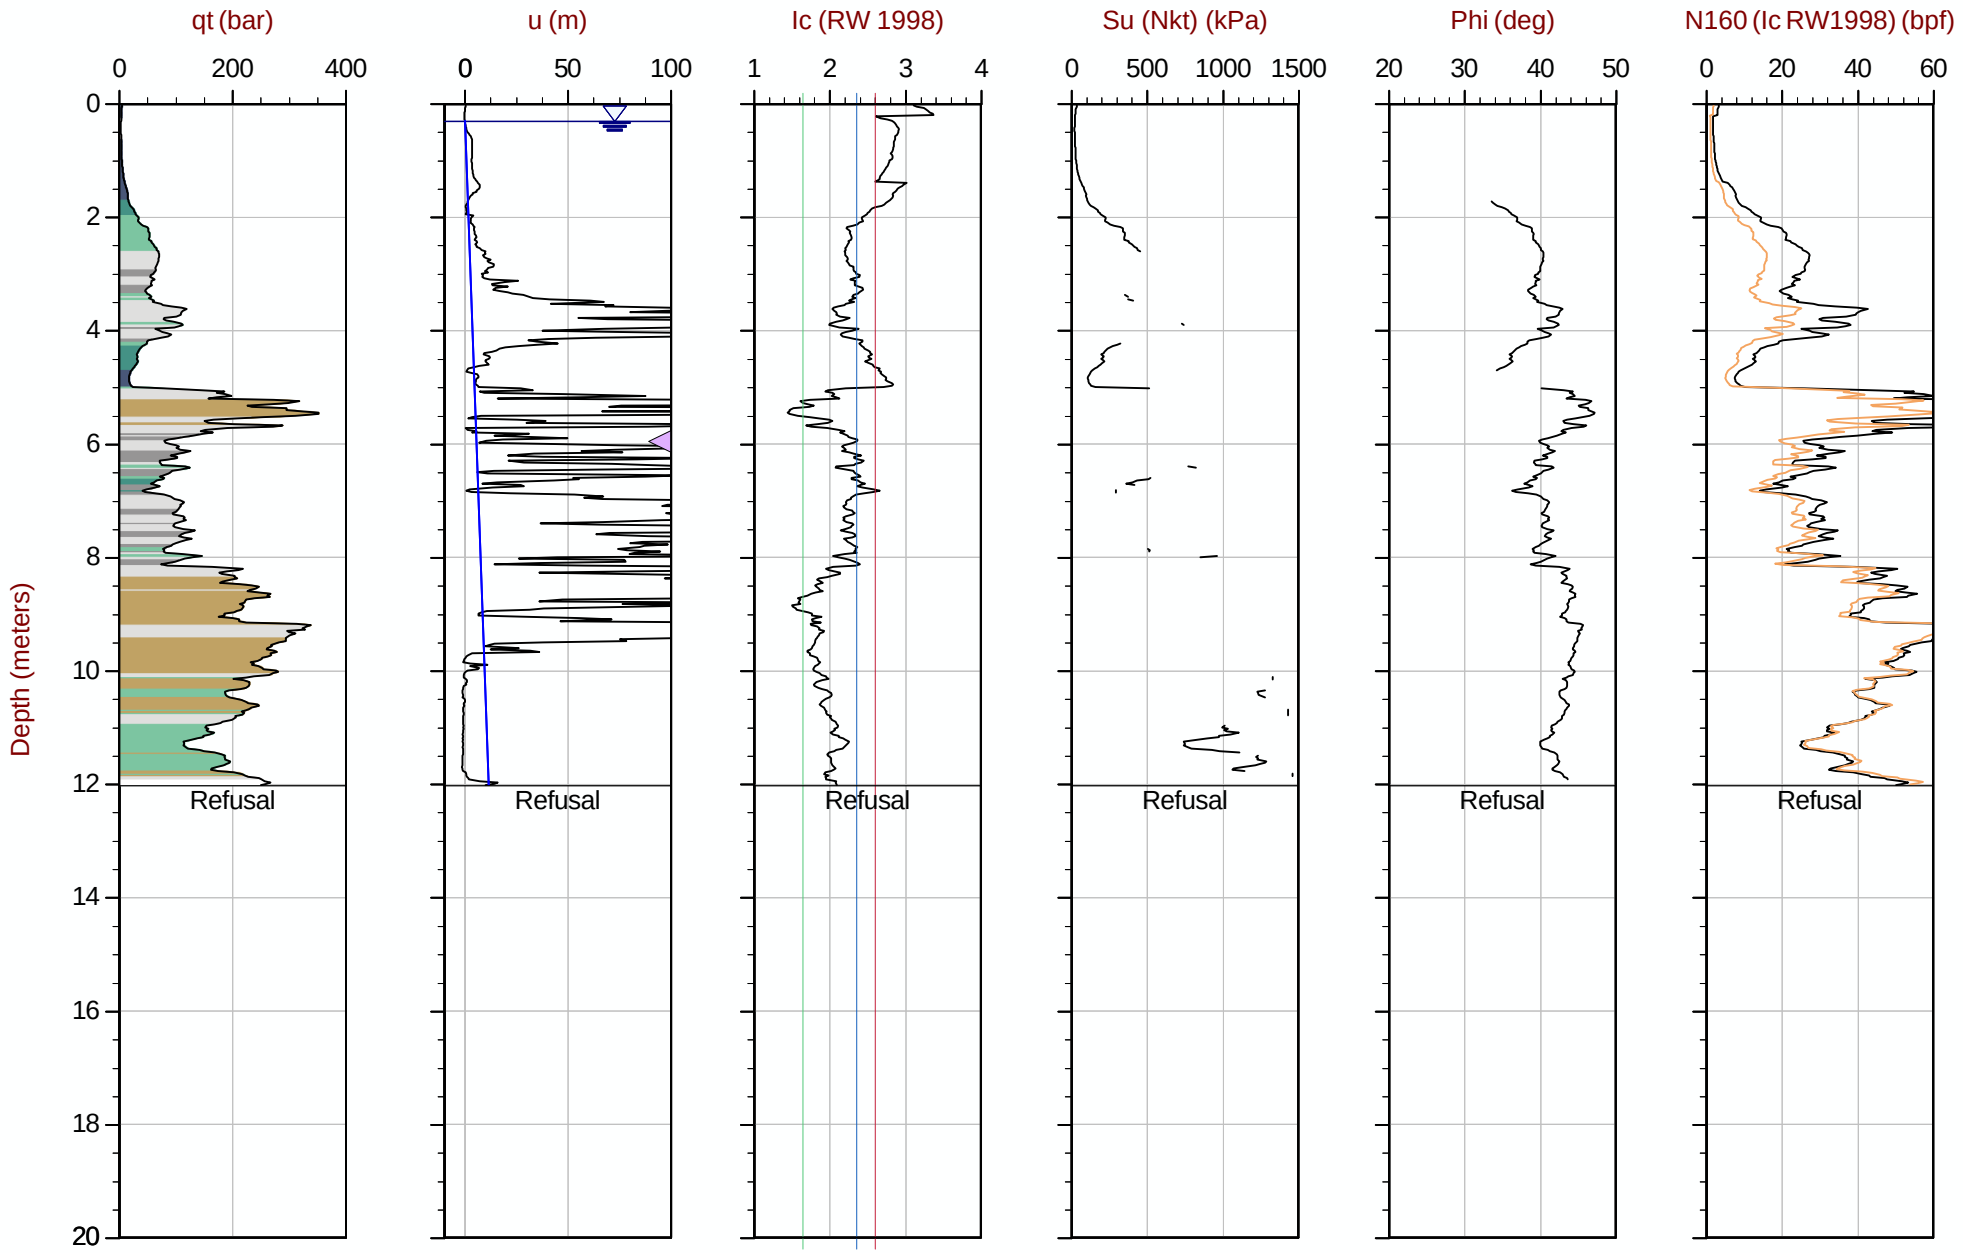

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT123B.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612545m E: 415569m Elev: 771.600m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 11:12
Site: Brooks, Alberta

Sounding: RCPT22-22CPT124
Cone: 822:T1000F10U35 Area= 15cm2

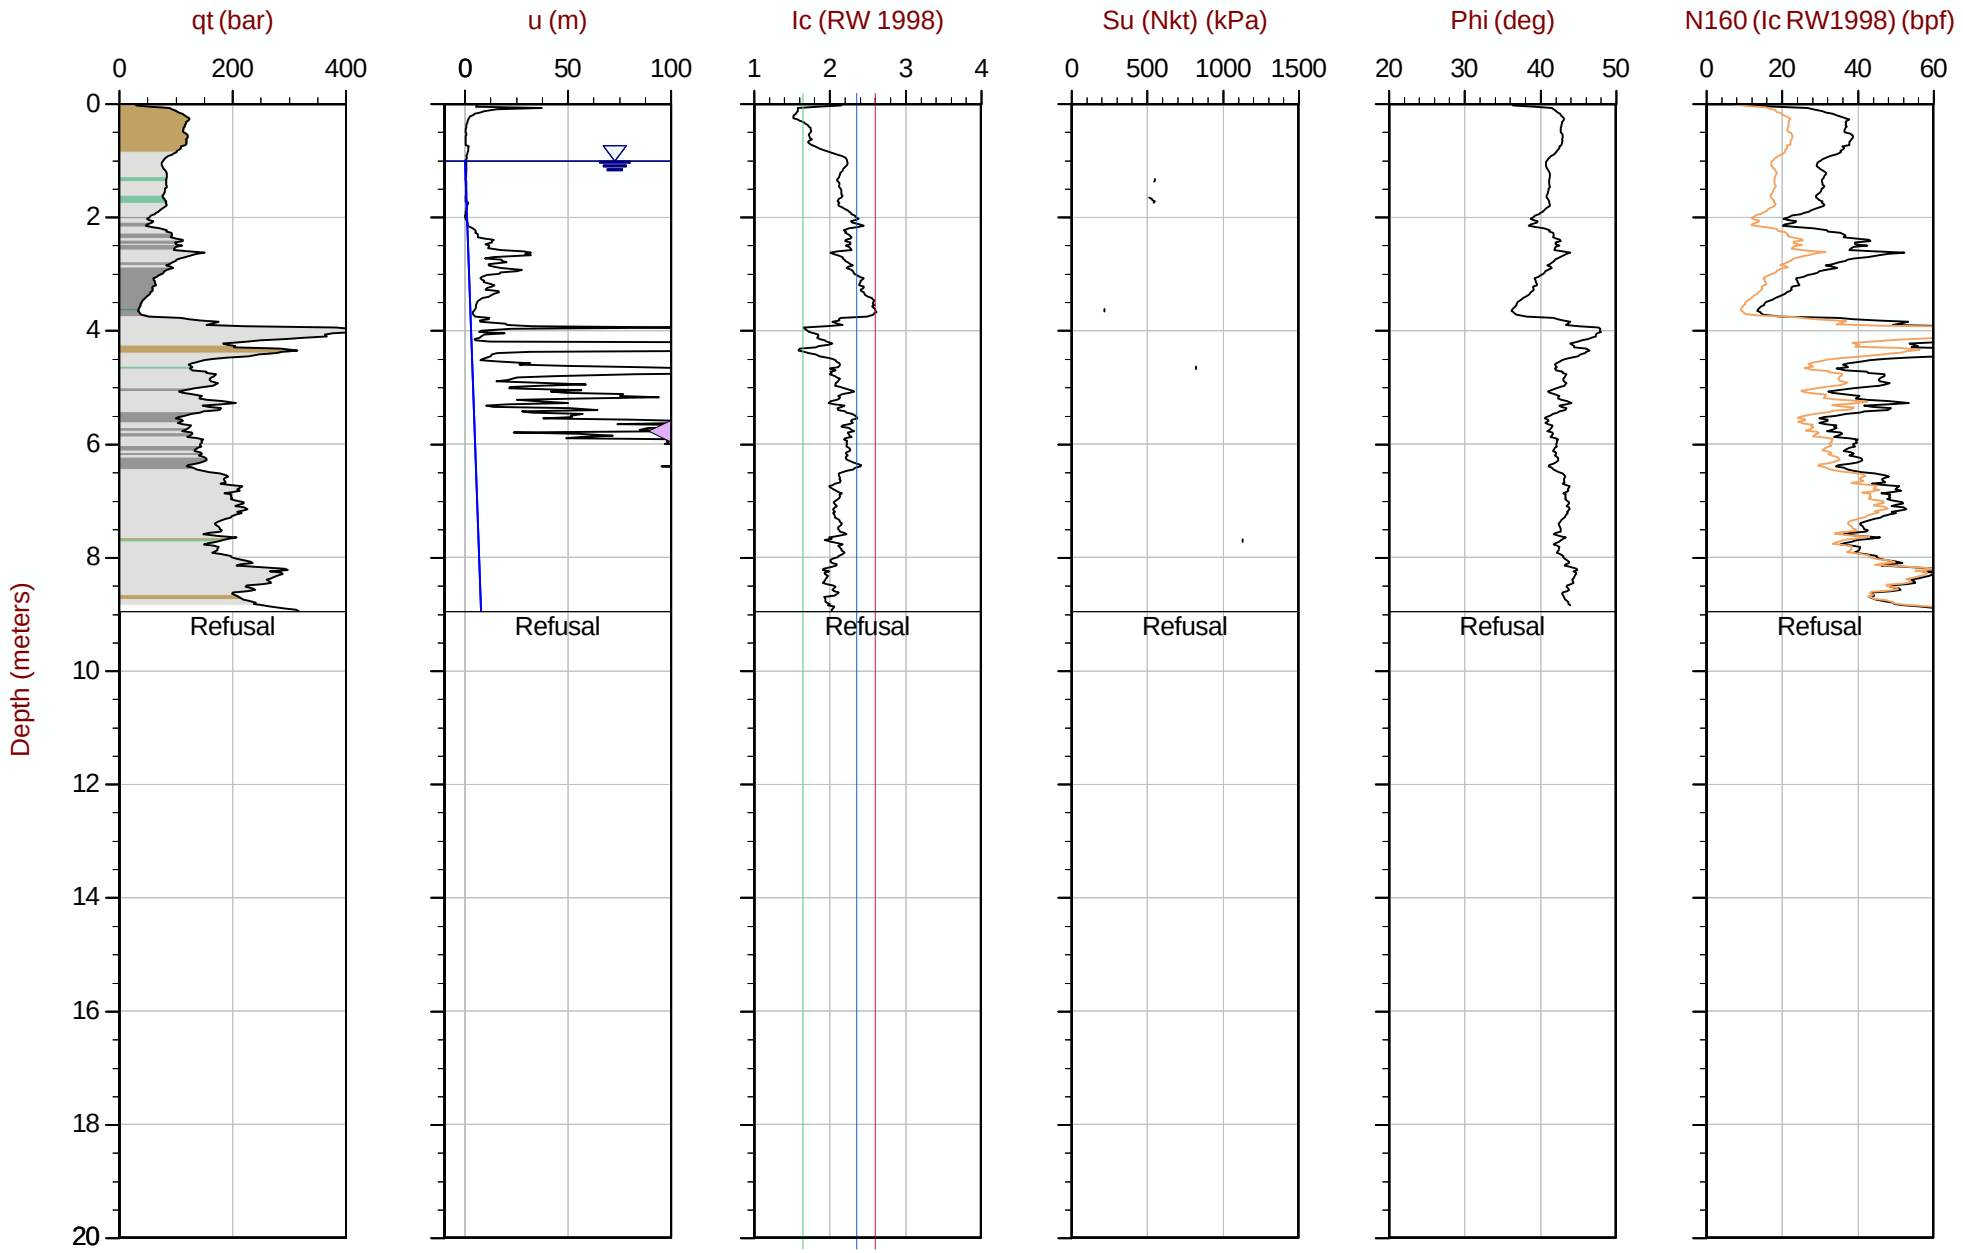

Max Depth: 8.950 m / 29.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT124.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612542m E: 415620m Elev: 770.903m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 10:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT125
Cone: 822:T1000F10U35 Area= 15cm2

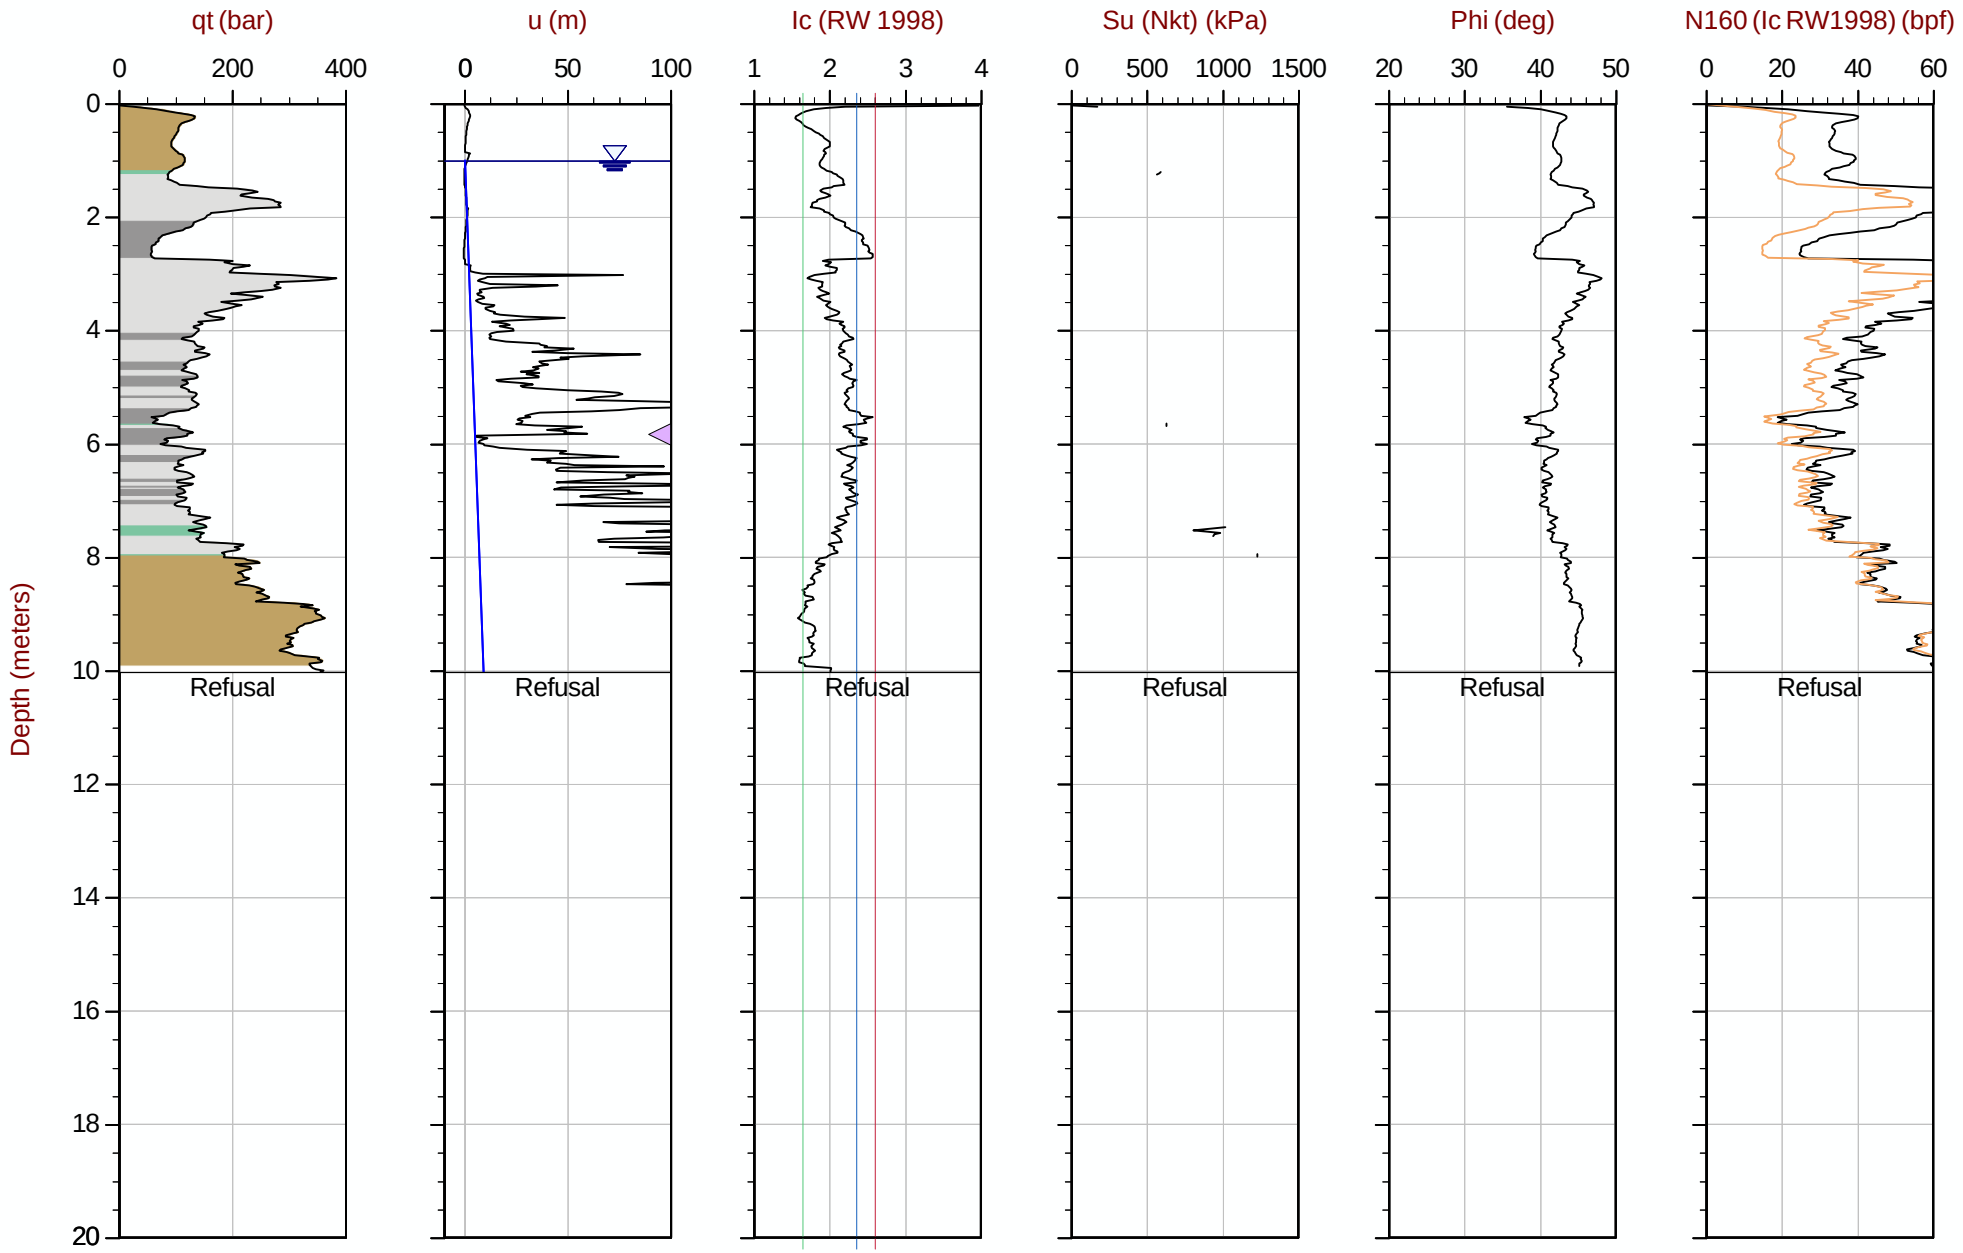

Max Depth: 10.025 m / 32.89 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT125.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612540m E: 415671m Elev: 770.690m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 12:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT126
Cone: 750:T1500F15U35 Area= 15cm2

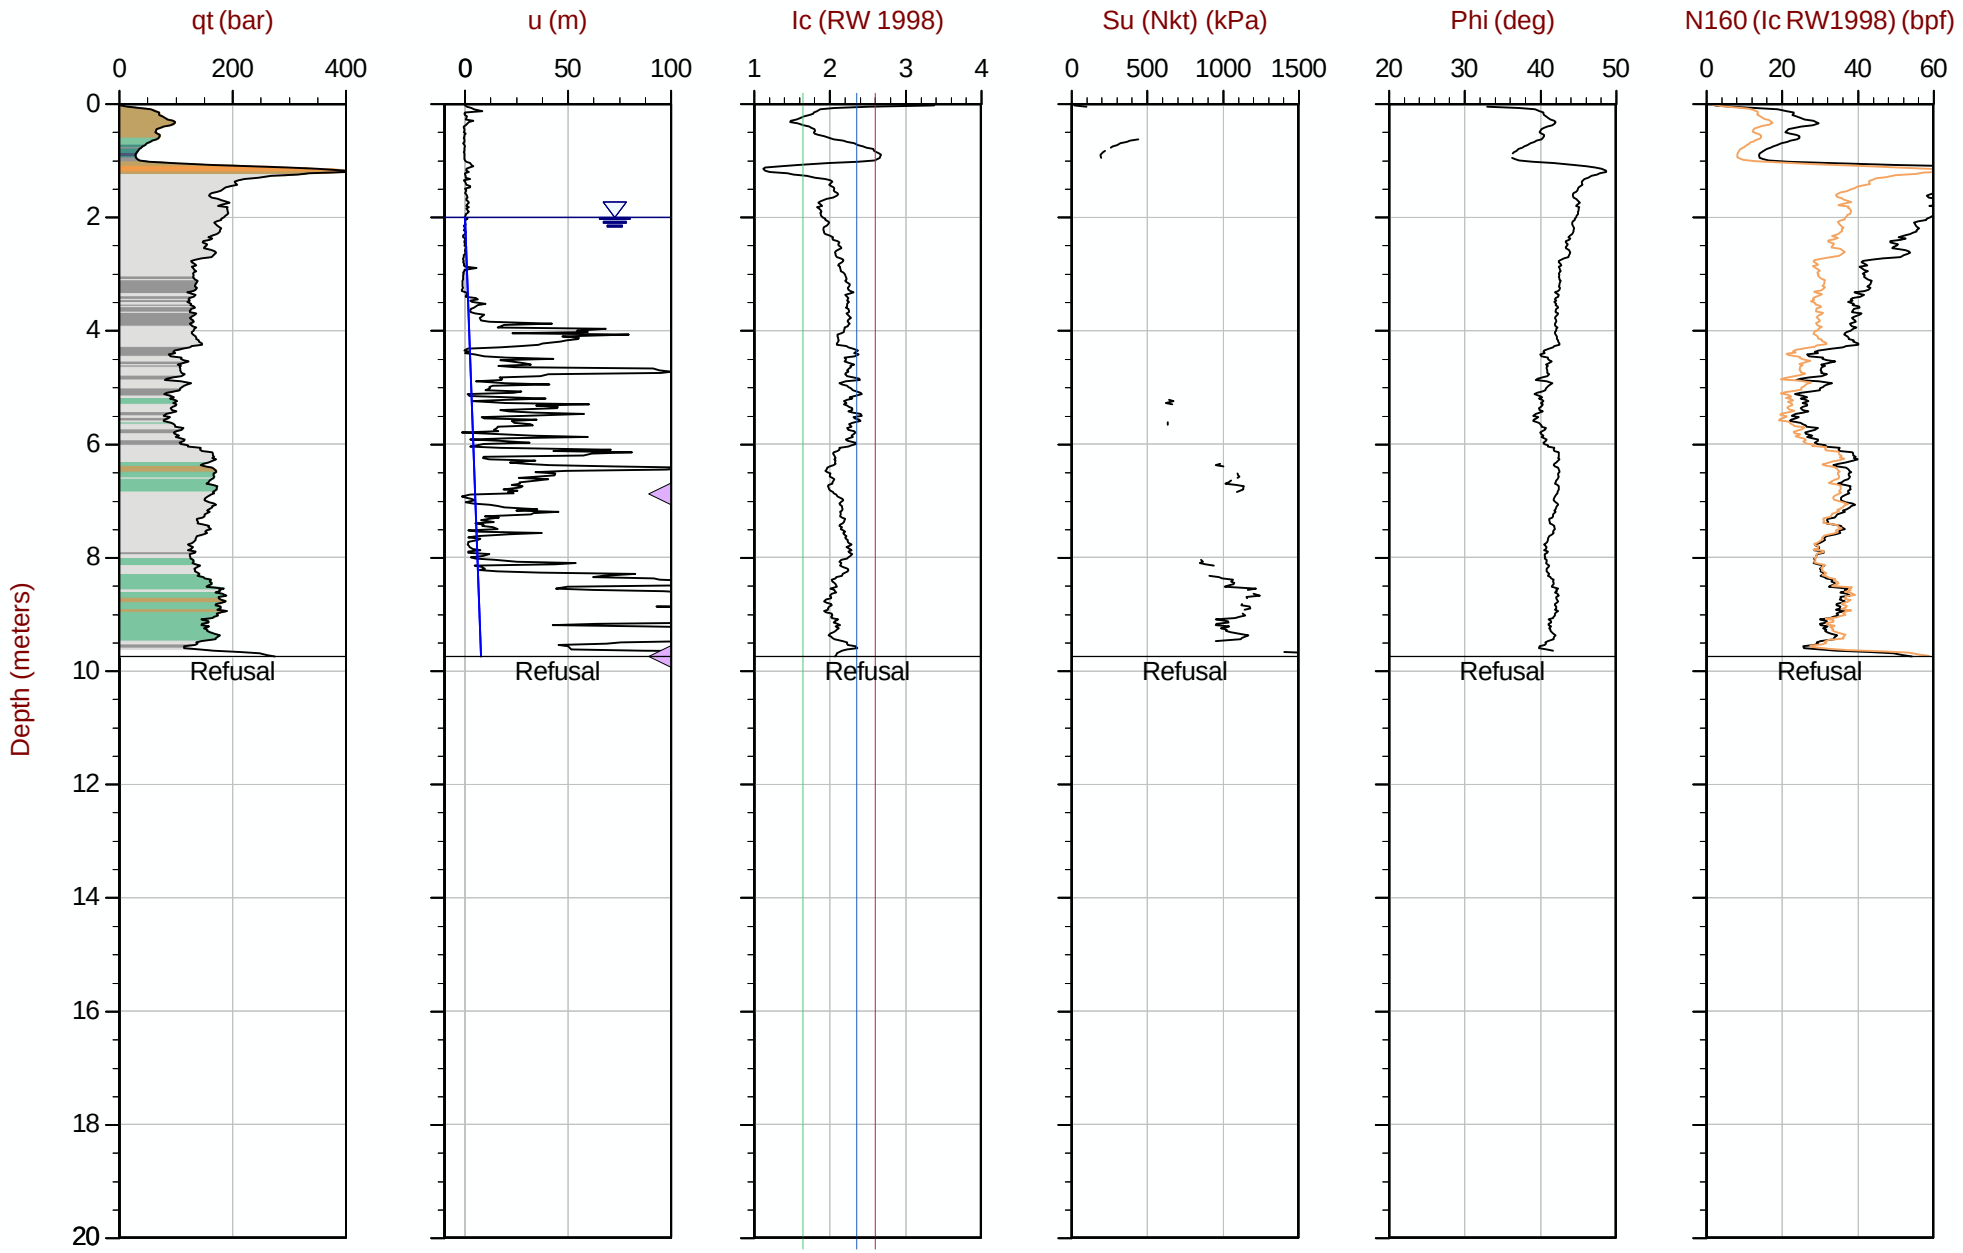

Max Depth: 9.750 m / 31.99 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT126.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612538m E: 415720m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 11:19
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT127
Cone: 750:T1500F15U35 Area= 15cm2

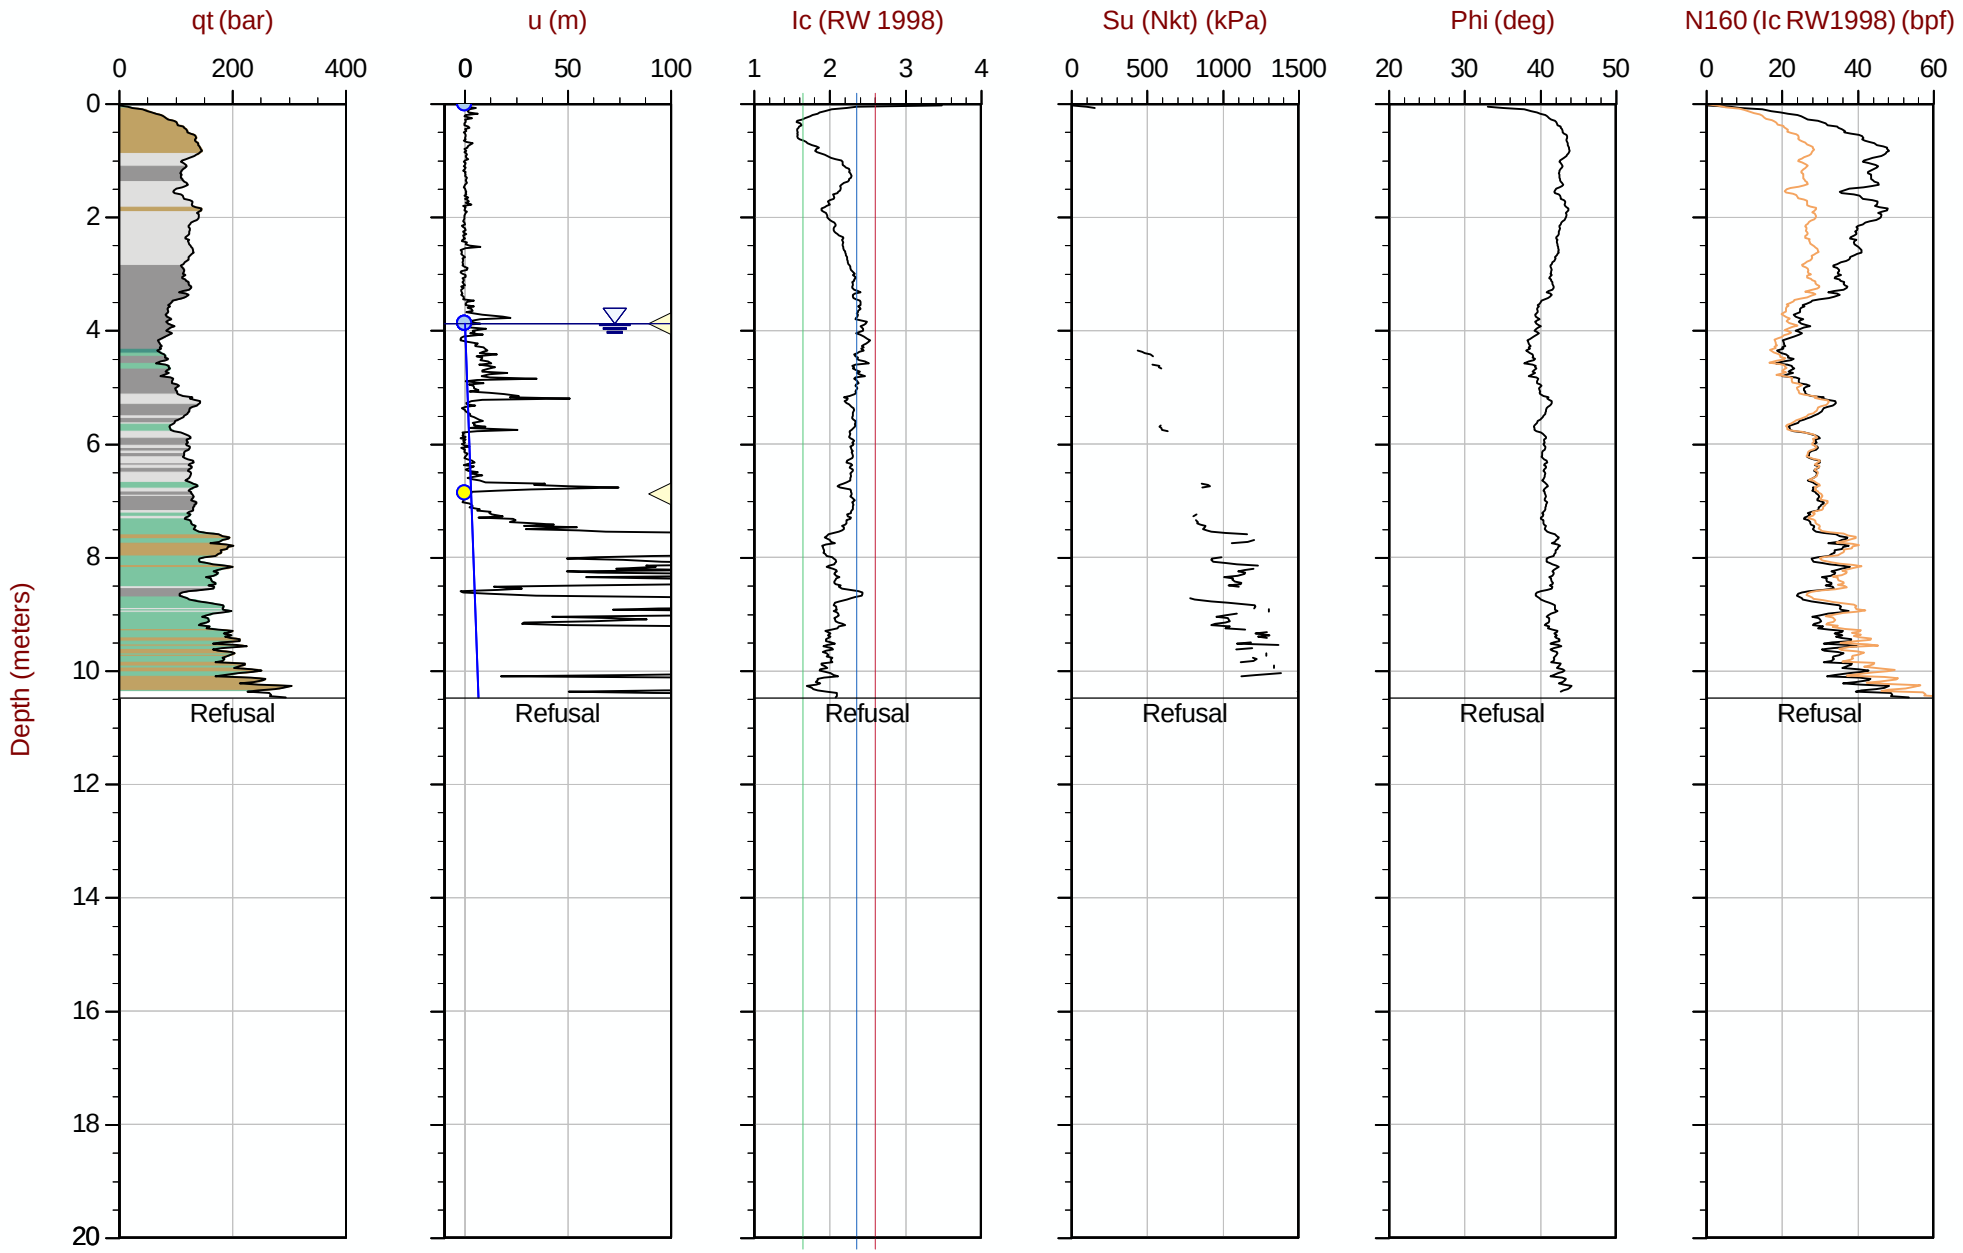

Max Depth: 10.475 m / 34.37 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT127.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612537m E: 415770m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 09:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT128
Cone: 750:T1500F15U35 Area= 15cm2

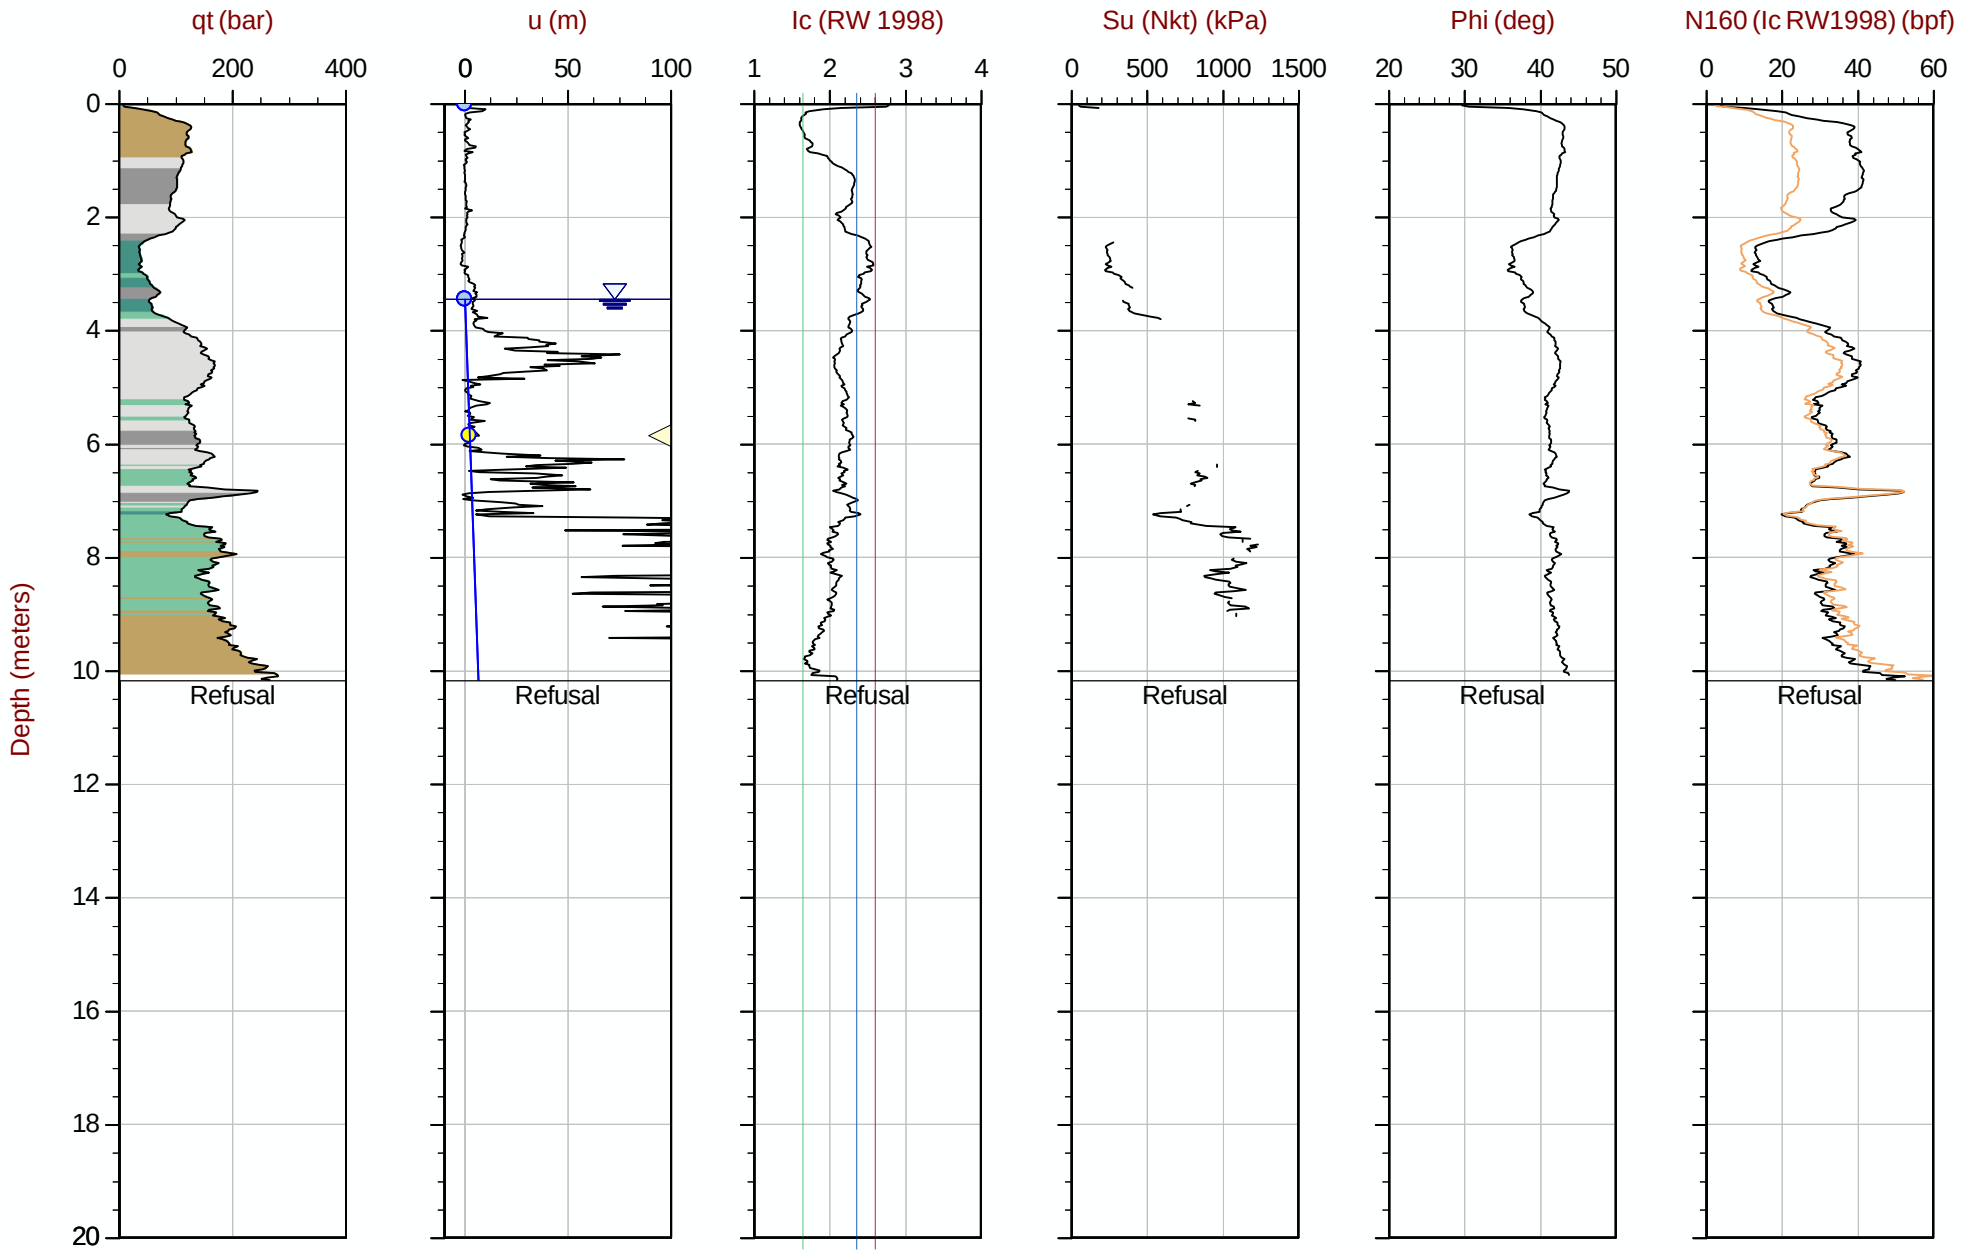

Max Depth: 10.175 m / 33.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT128.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612536m E: 415820m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 08:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129
Cone: 821:T1000F10U35 Area= 15cm2

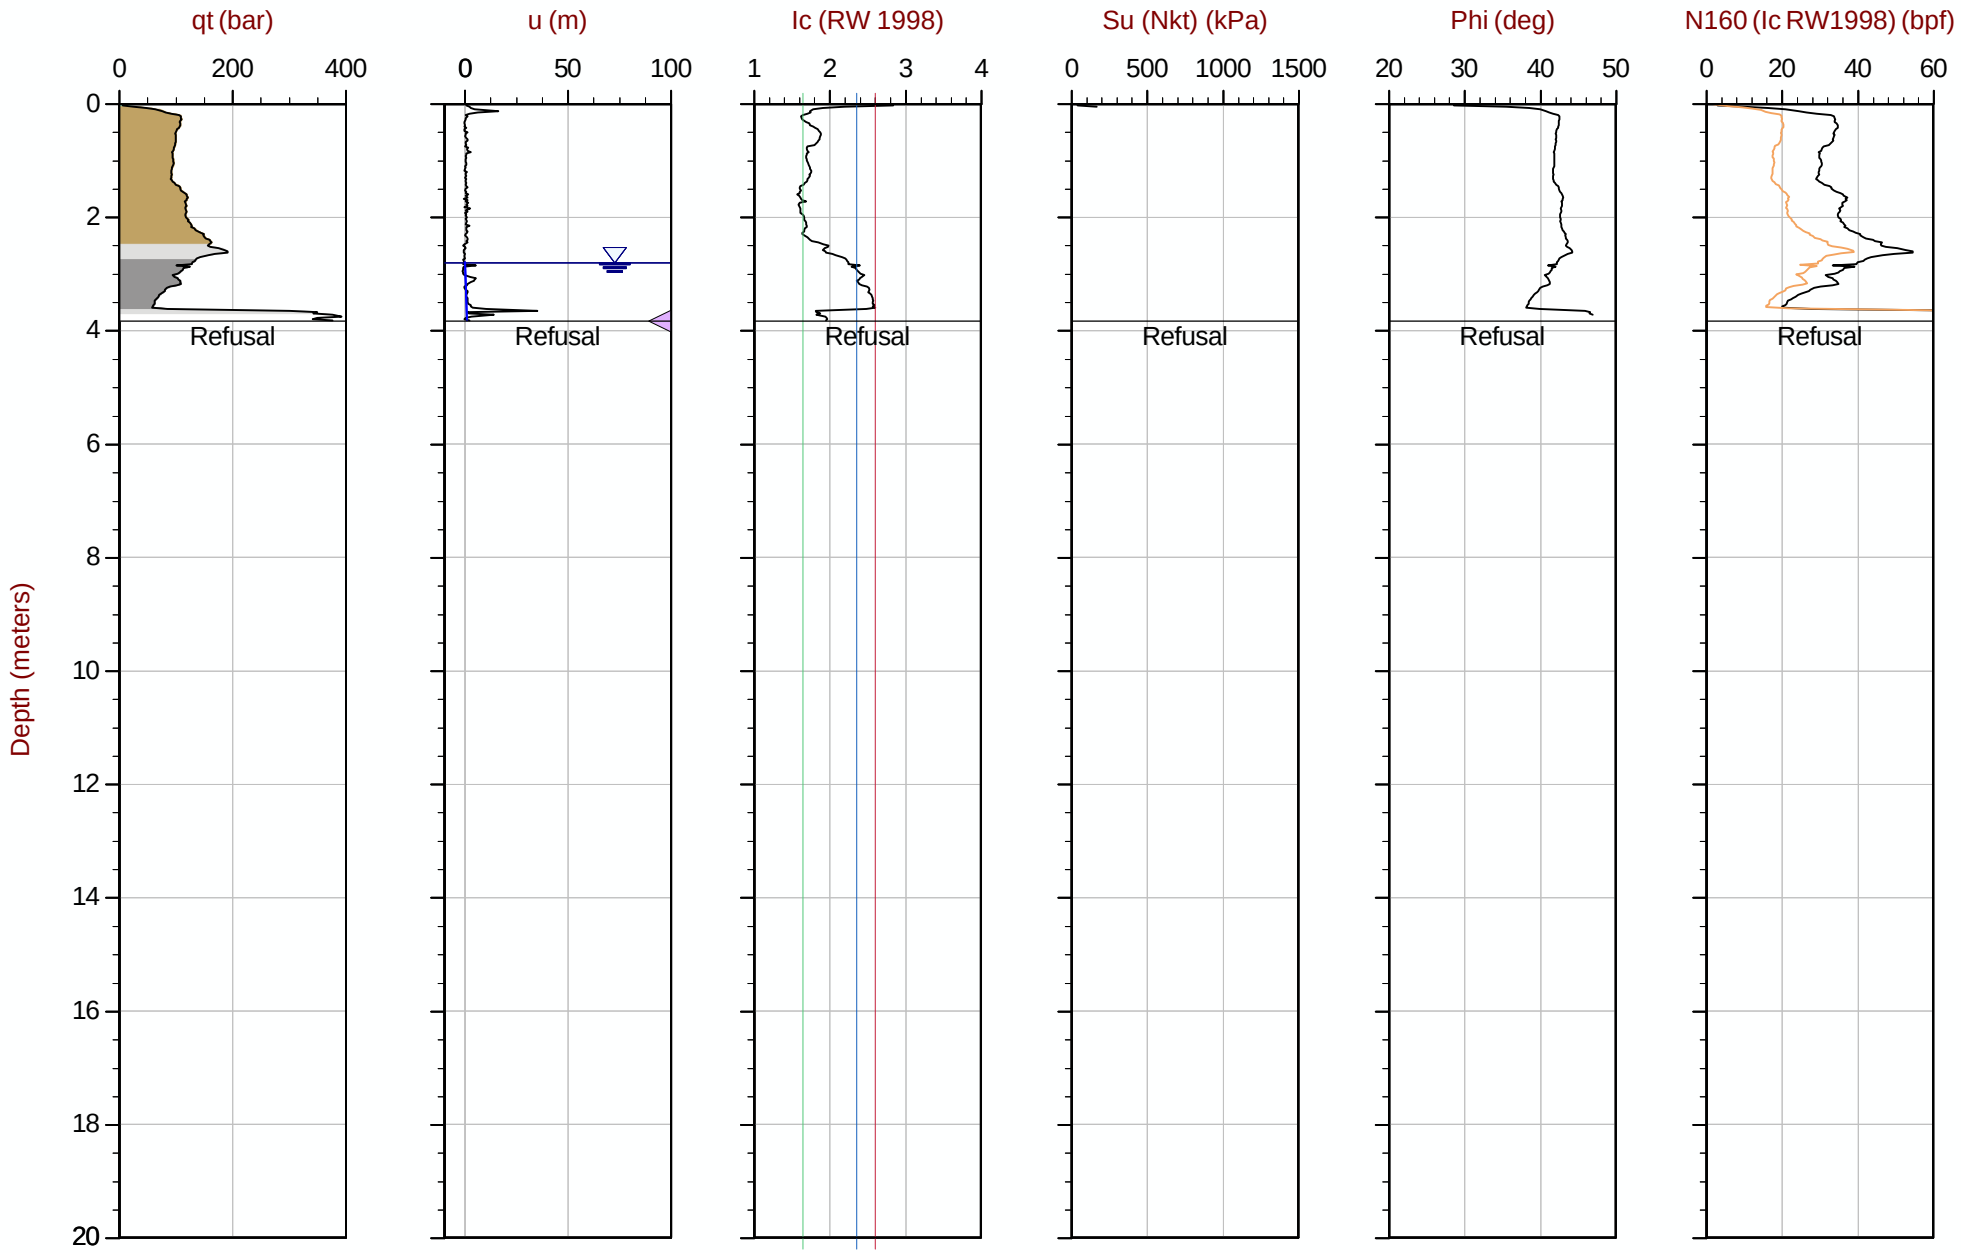

Max Depth: 3.825 m / 12.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT129.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612534m E: 415870m Elev: 769.474m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 08:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129B
Cone: 821:T1000F10U35 Area= 15cm2

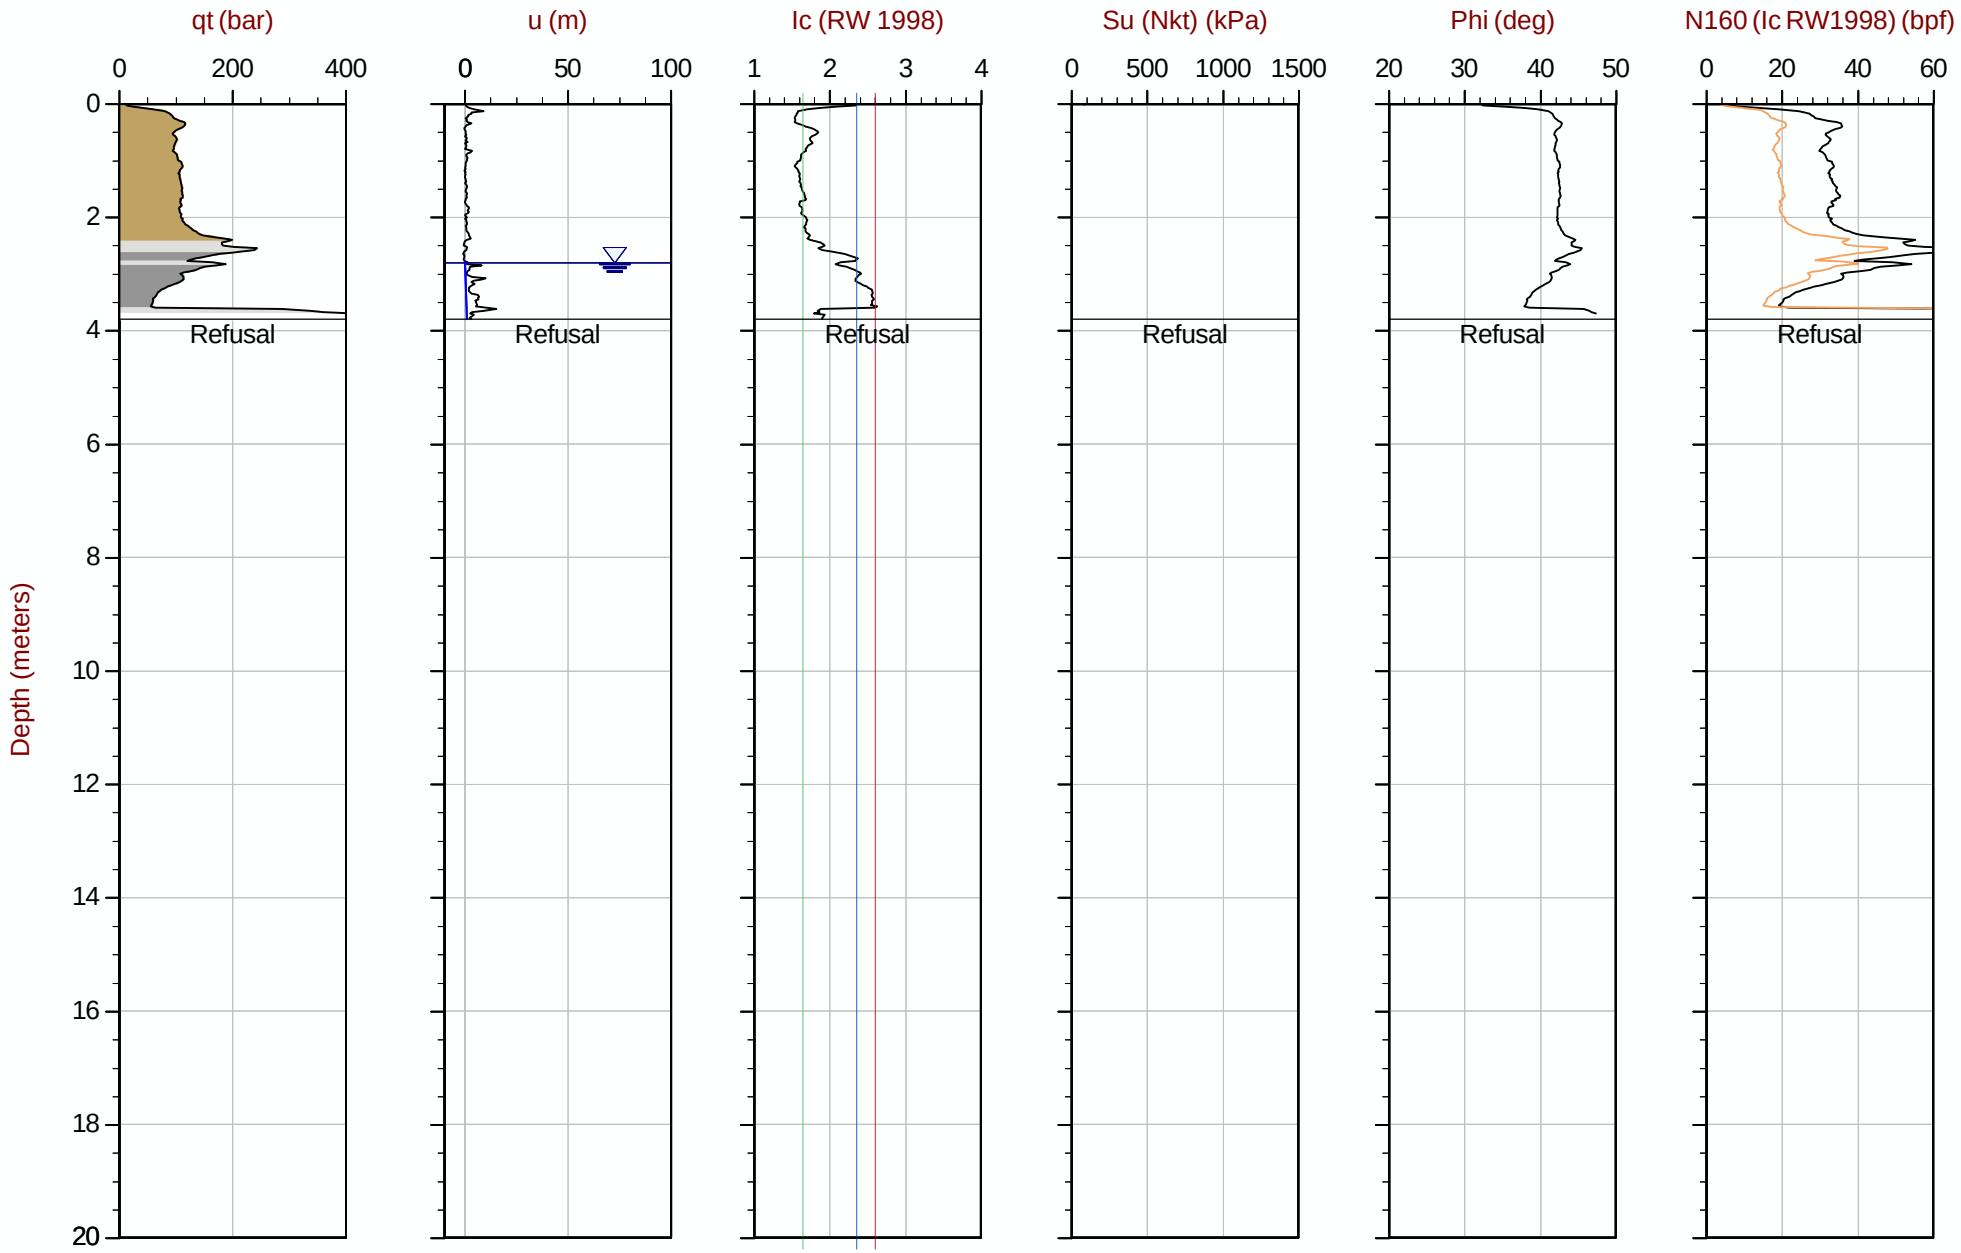

Max Depth: 3.800 m / 12.47 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT129B.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612534m E: 415868m Elev: 769.500m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 09:28
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129C
Cone: 822:T1000F10U35 Area= 15cm2

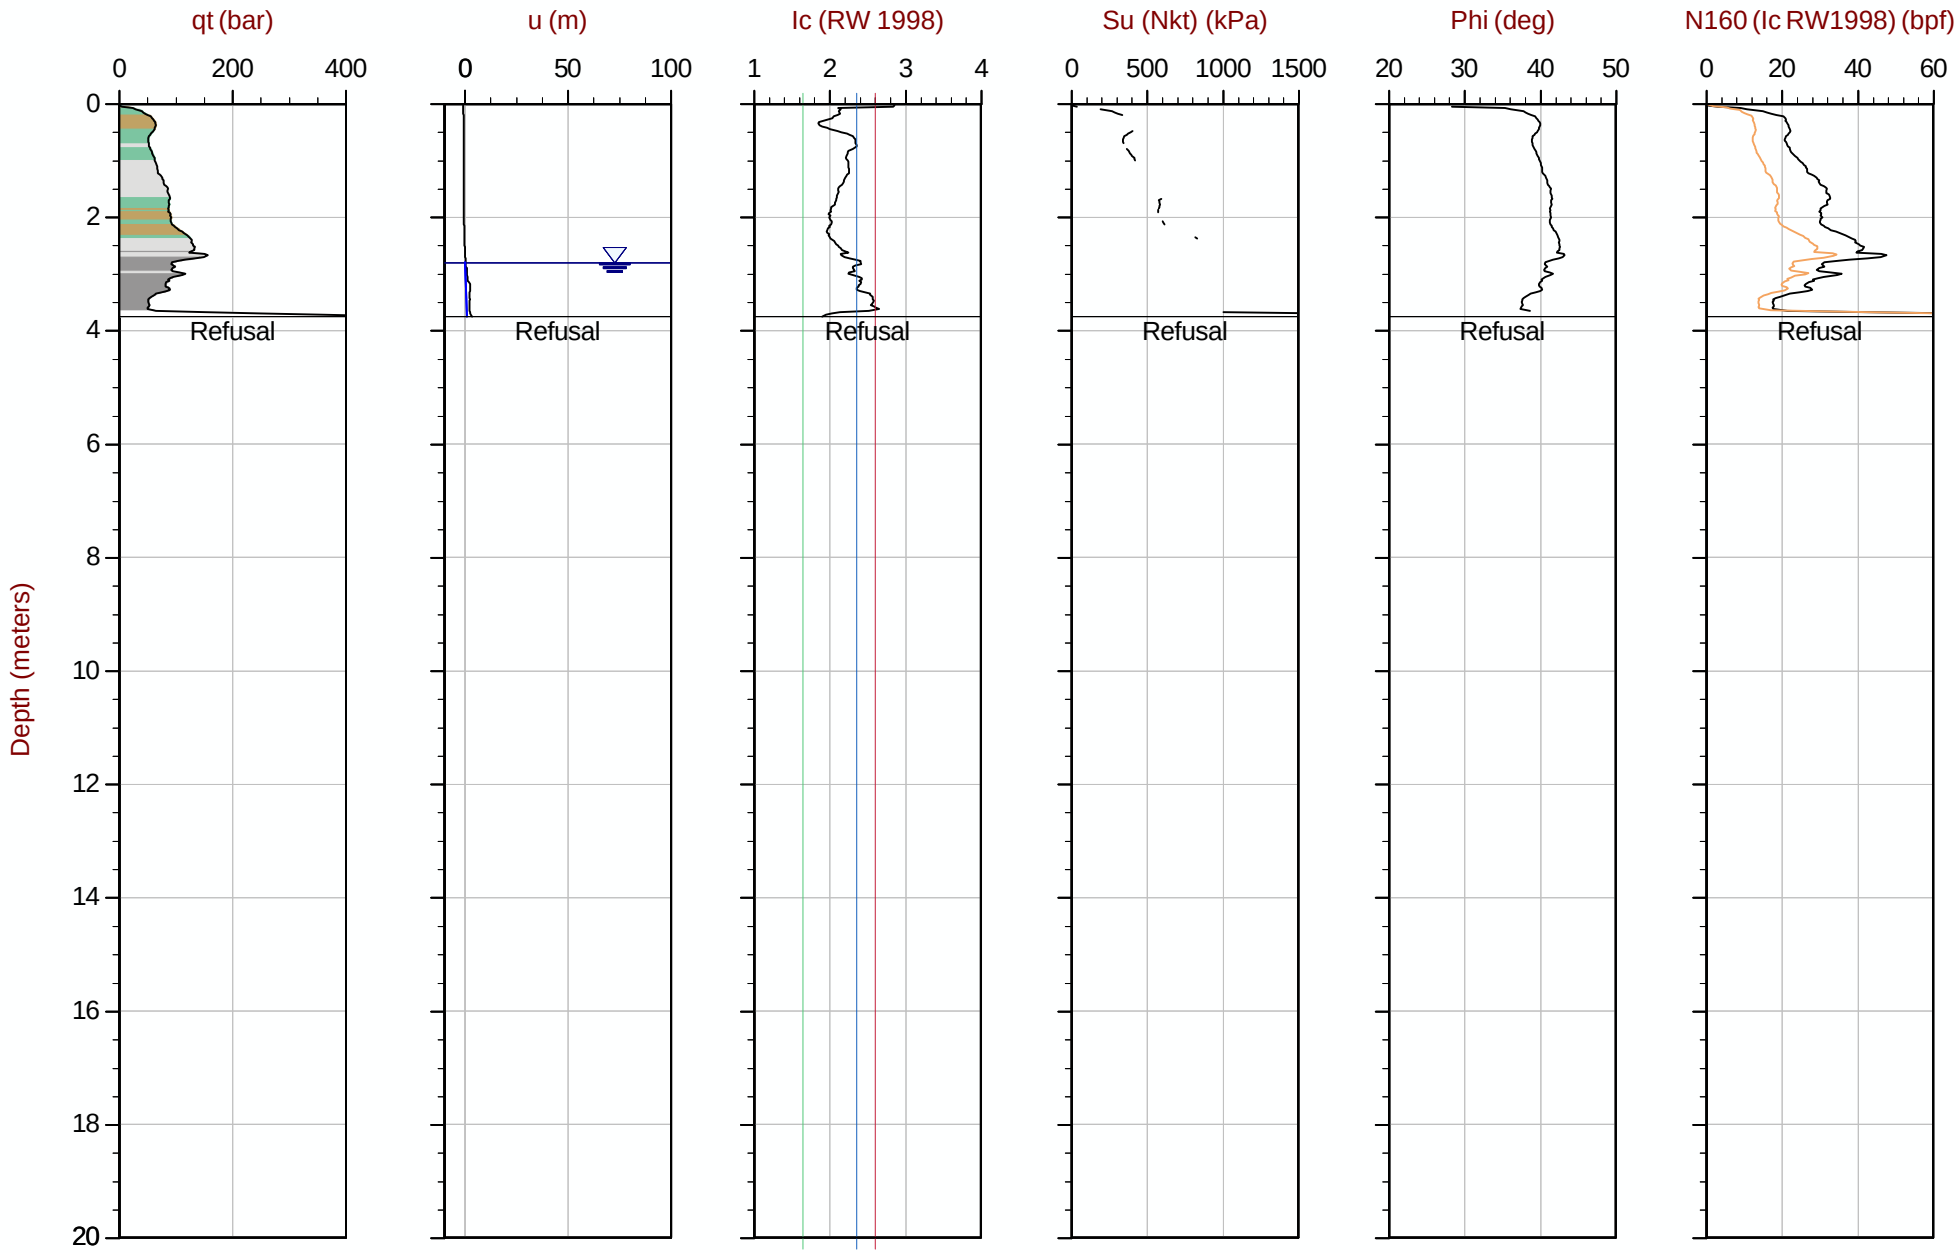

Max Depth: 3.750 m / 12.30 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT129C.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612534m E: 415868m Elev: 769.500m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 16:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT130
Cone: 821:T1000F10U35 Area= 15cm2

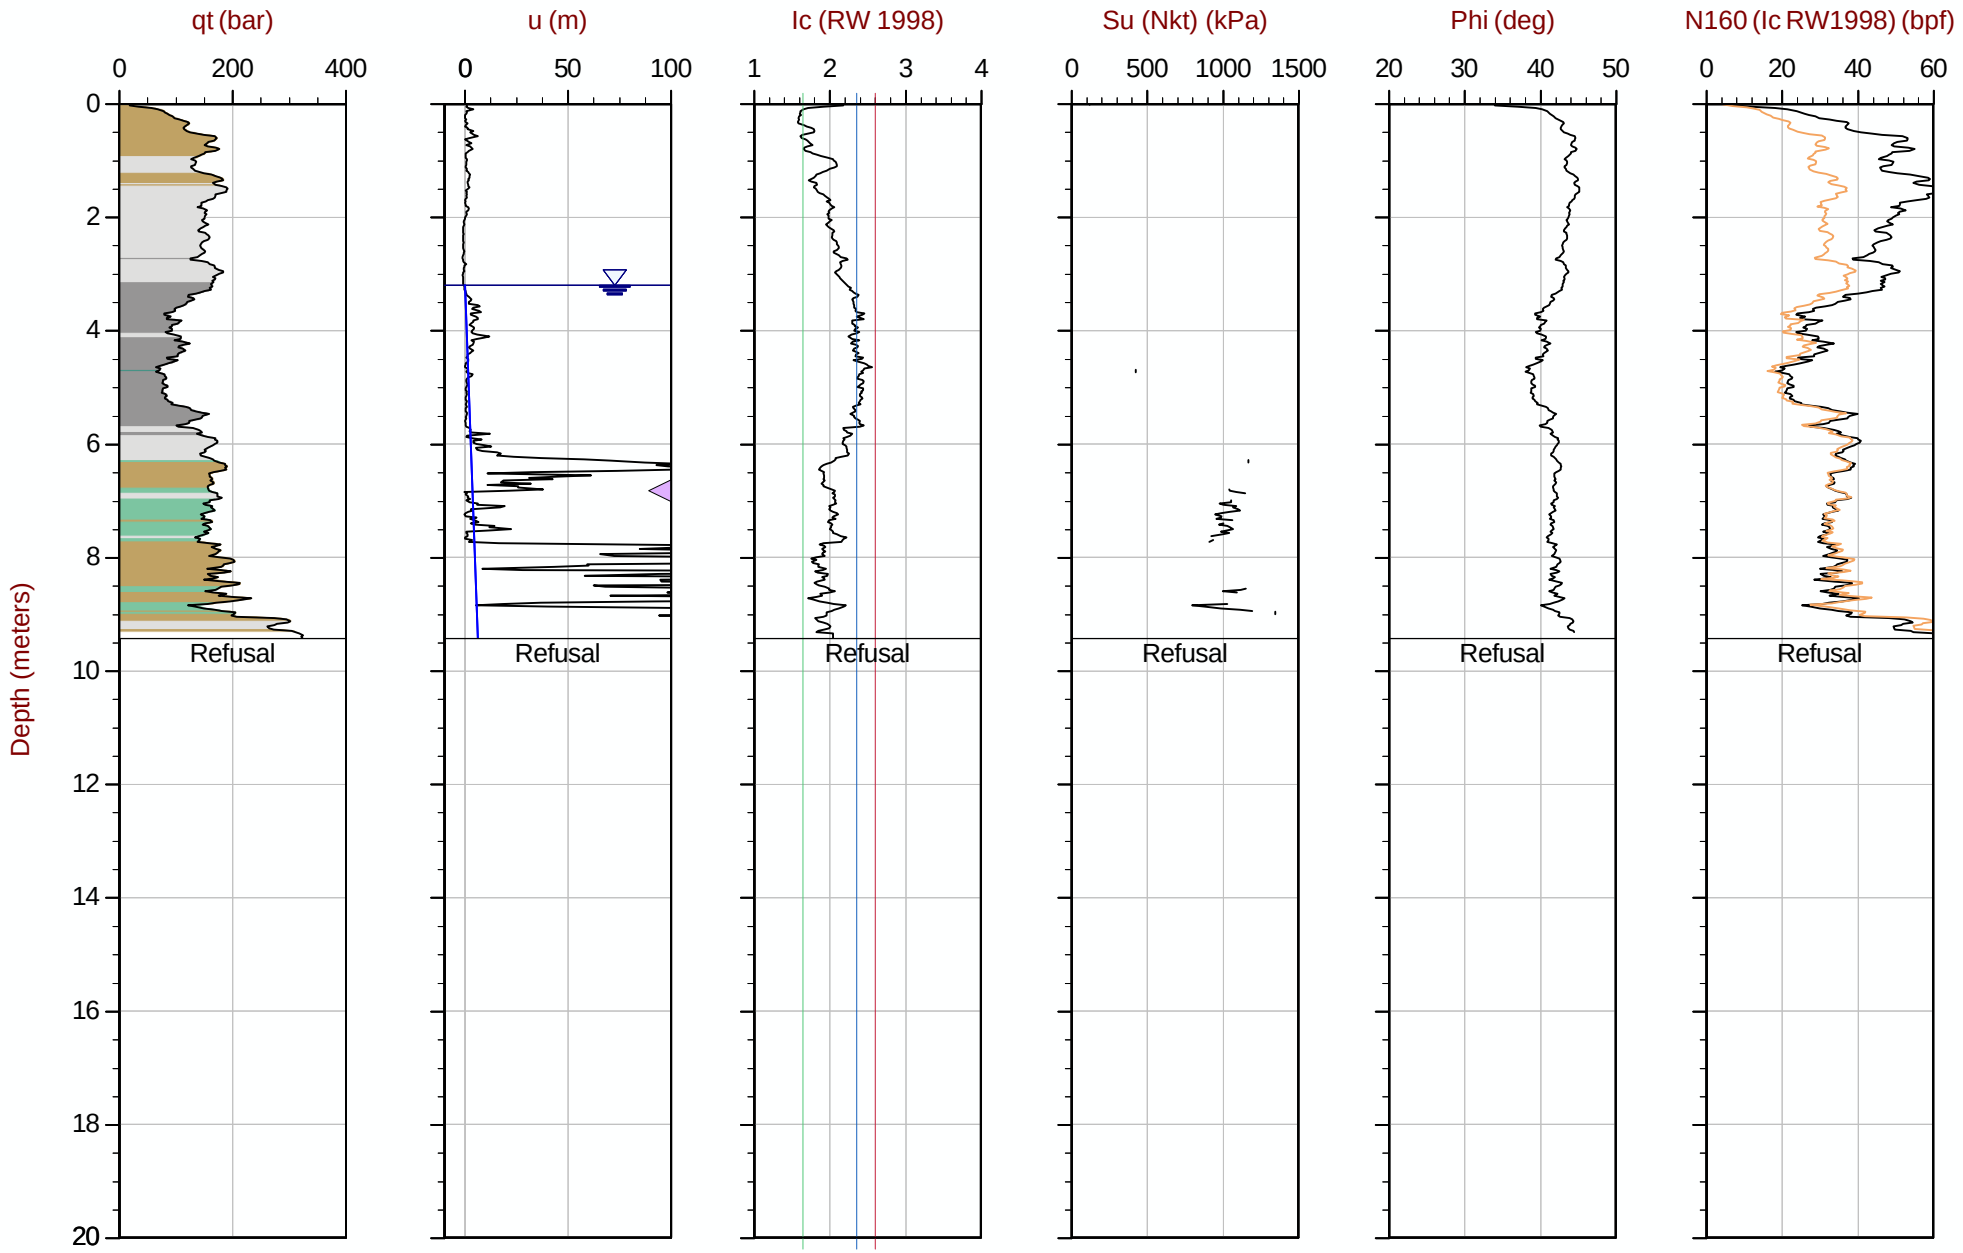

Max Depth: 9.425 m / 30.92 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT130.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612533m E: 415920m Elev: 769.325m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 14:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT131
Cone: 750:T1500F15U35 Area= 15cm2

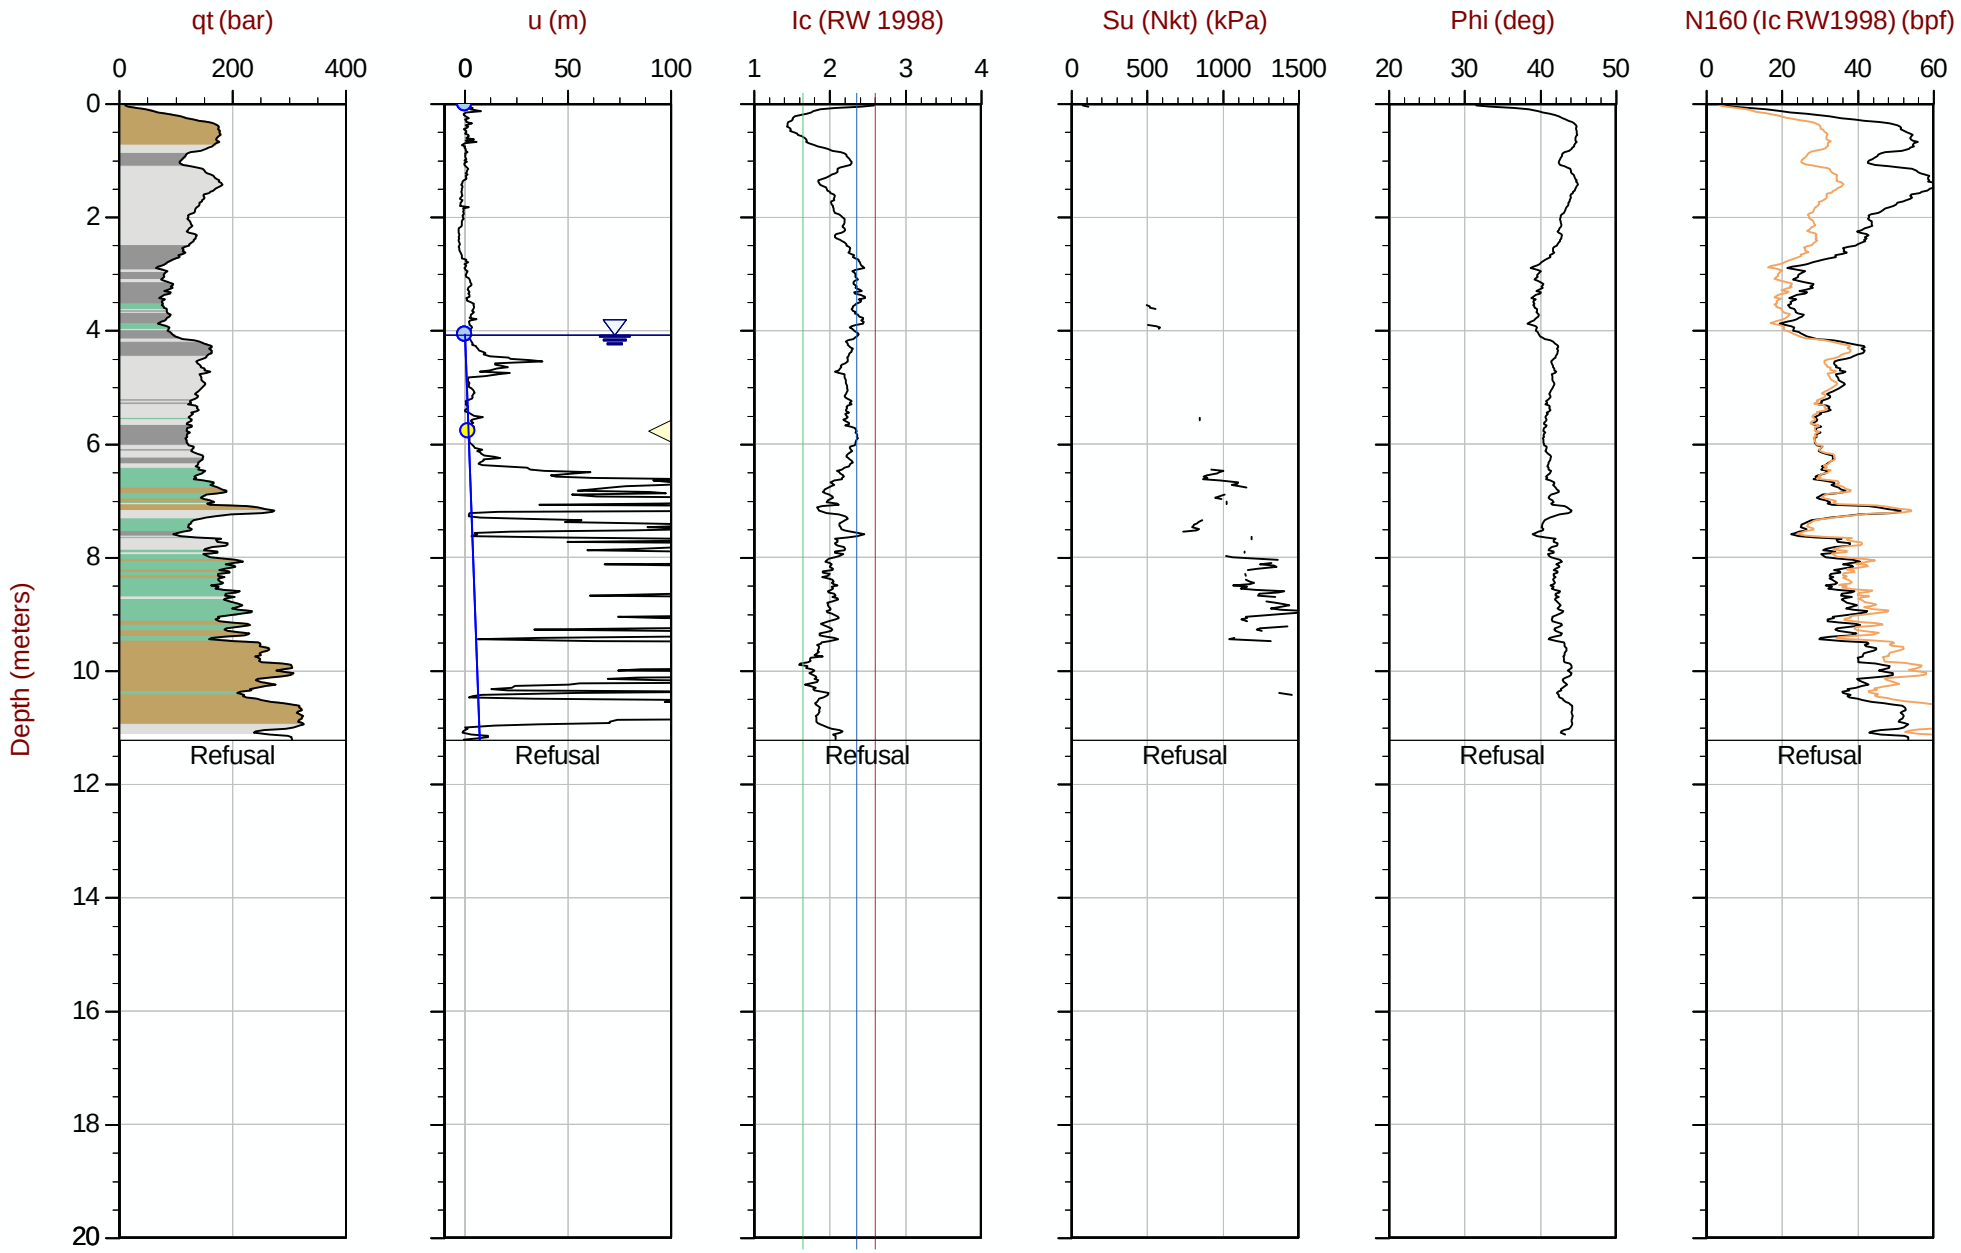

Max Depth: 11.225 m / 36.83 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT131.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612532m E: 415967m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 11:02
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131E
Cone: 822:T1000F10U35 Area= 15cm2

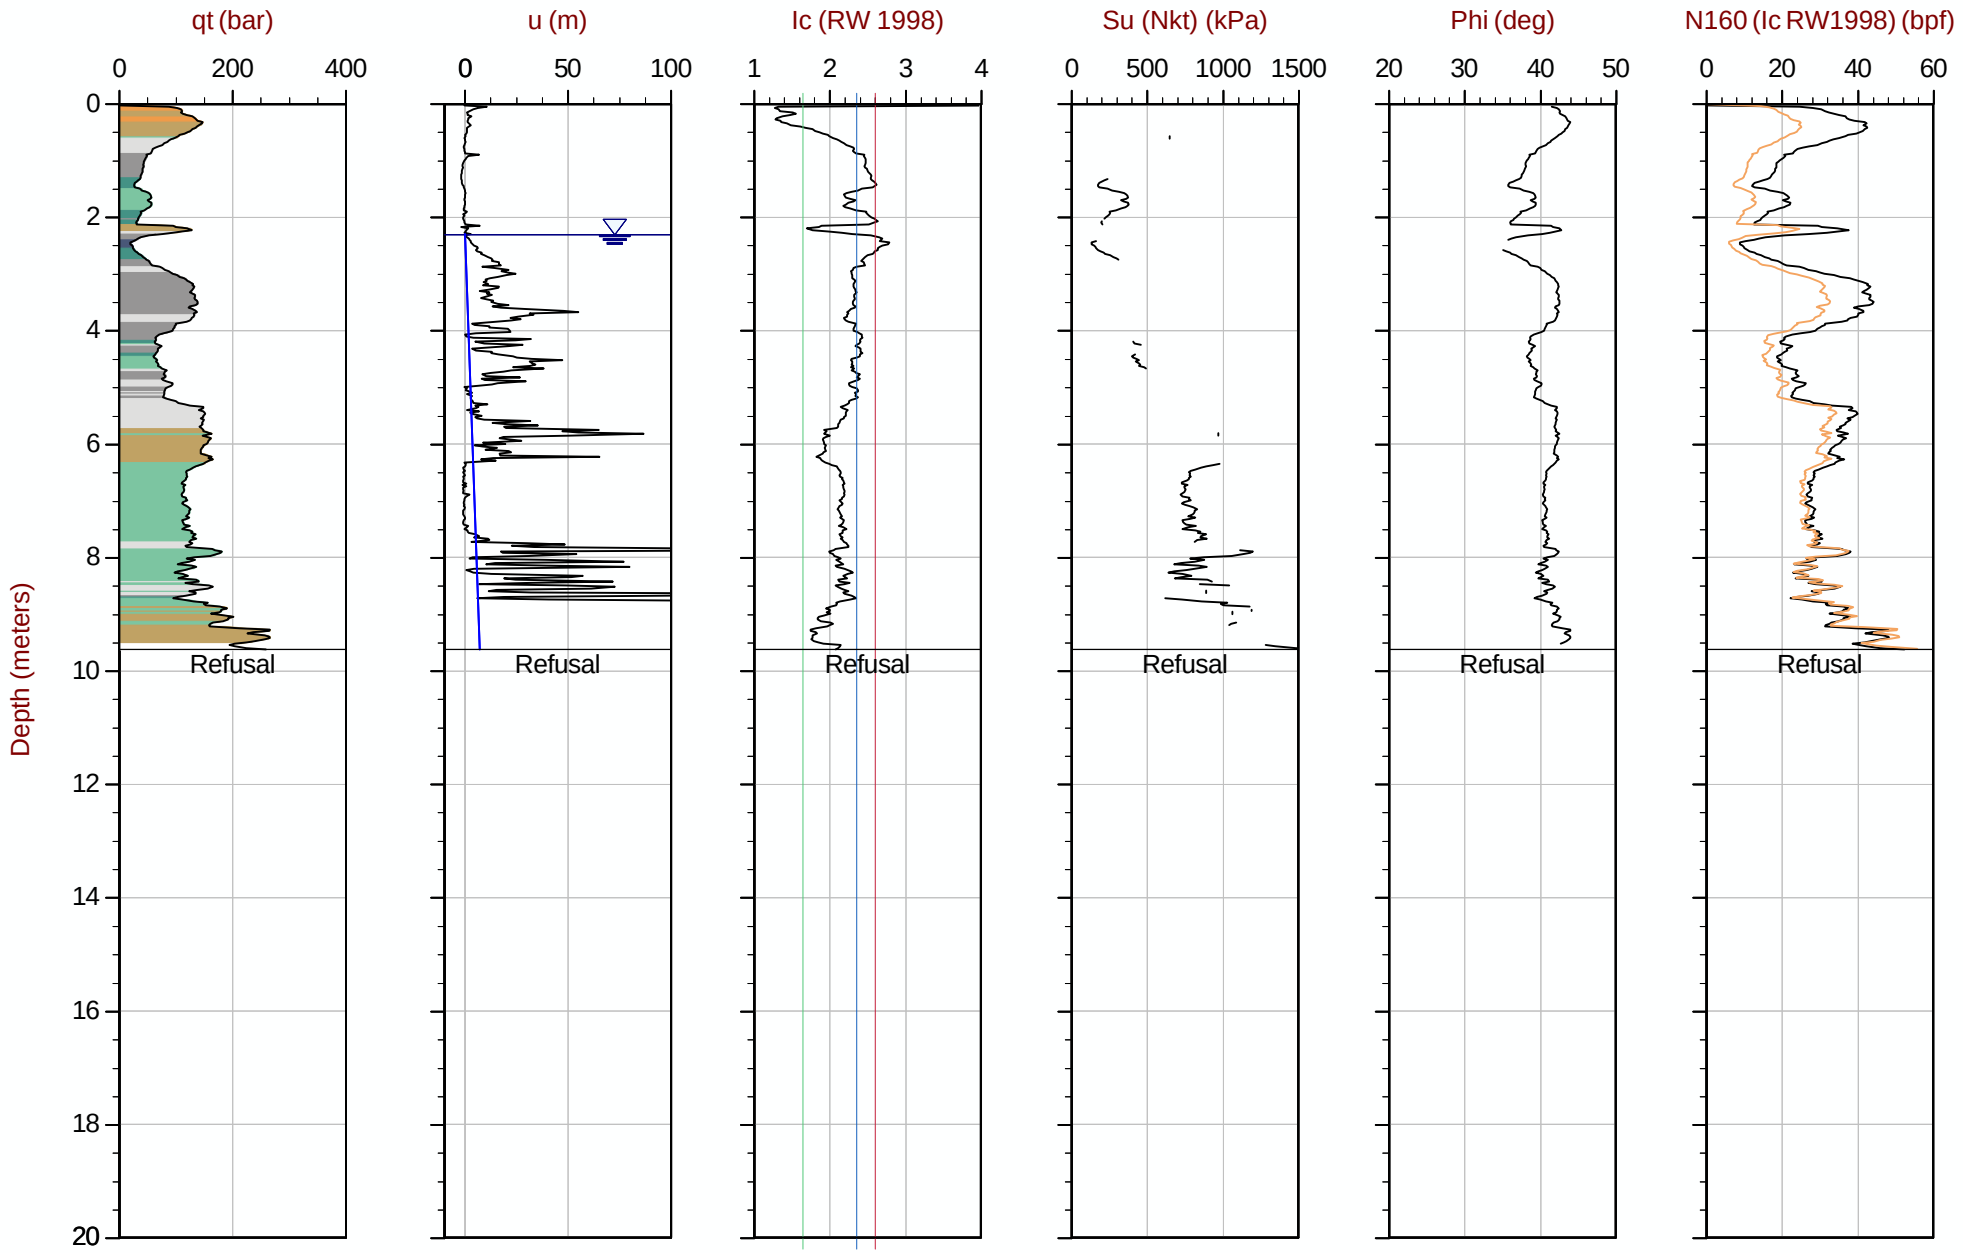

Max Depth: 9.625 m / 31.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131E.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612505m E: 416389m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 09:17
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131N
Cone: 822:T1000F10U35 Area= 15cm2

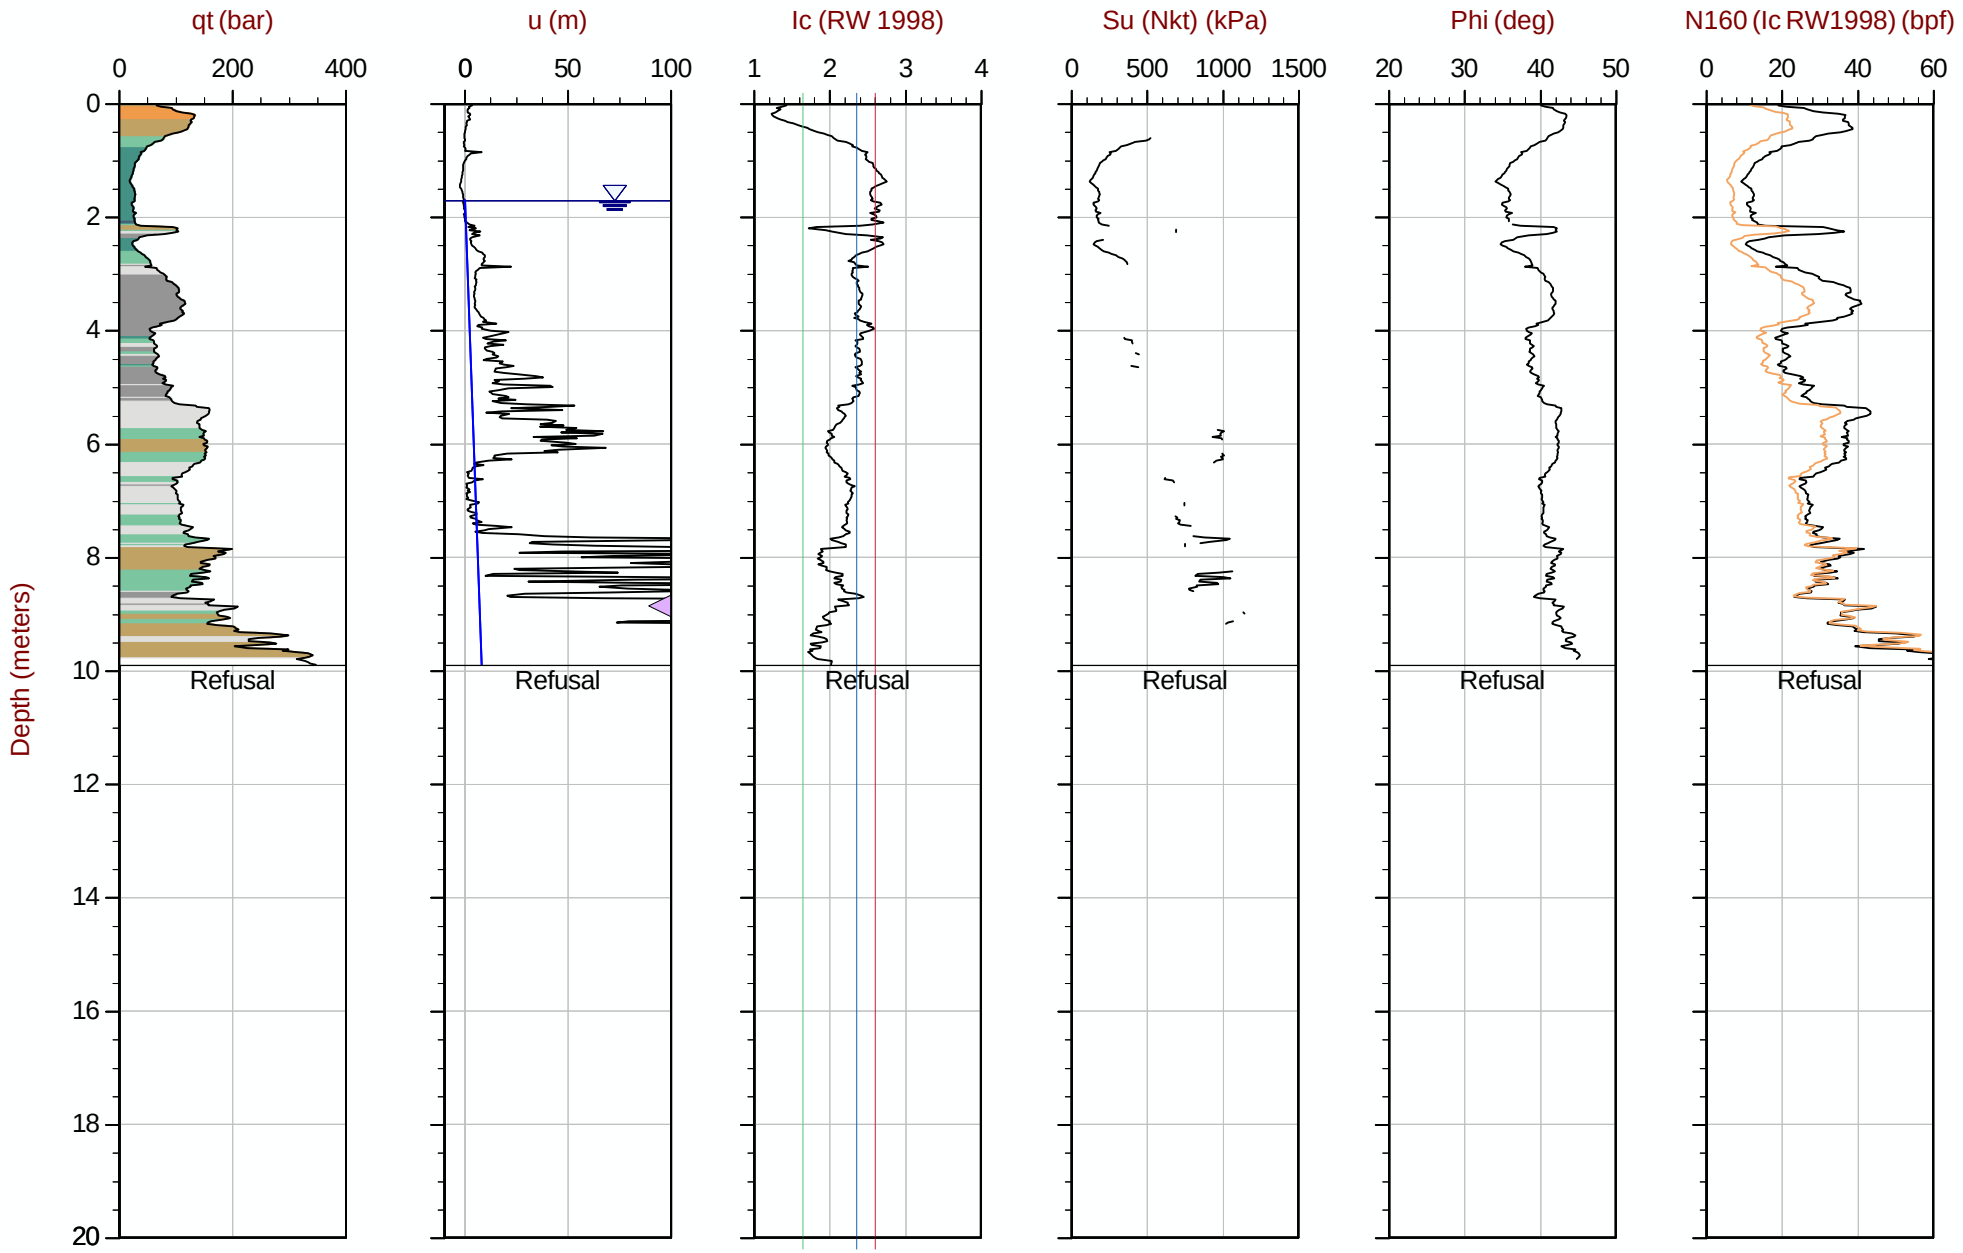

Max Depth: 9.900 m / 32.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131N.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612506m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 11:46
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131S1
Cone: 822:T1000F10U35 Area= 15cm2

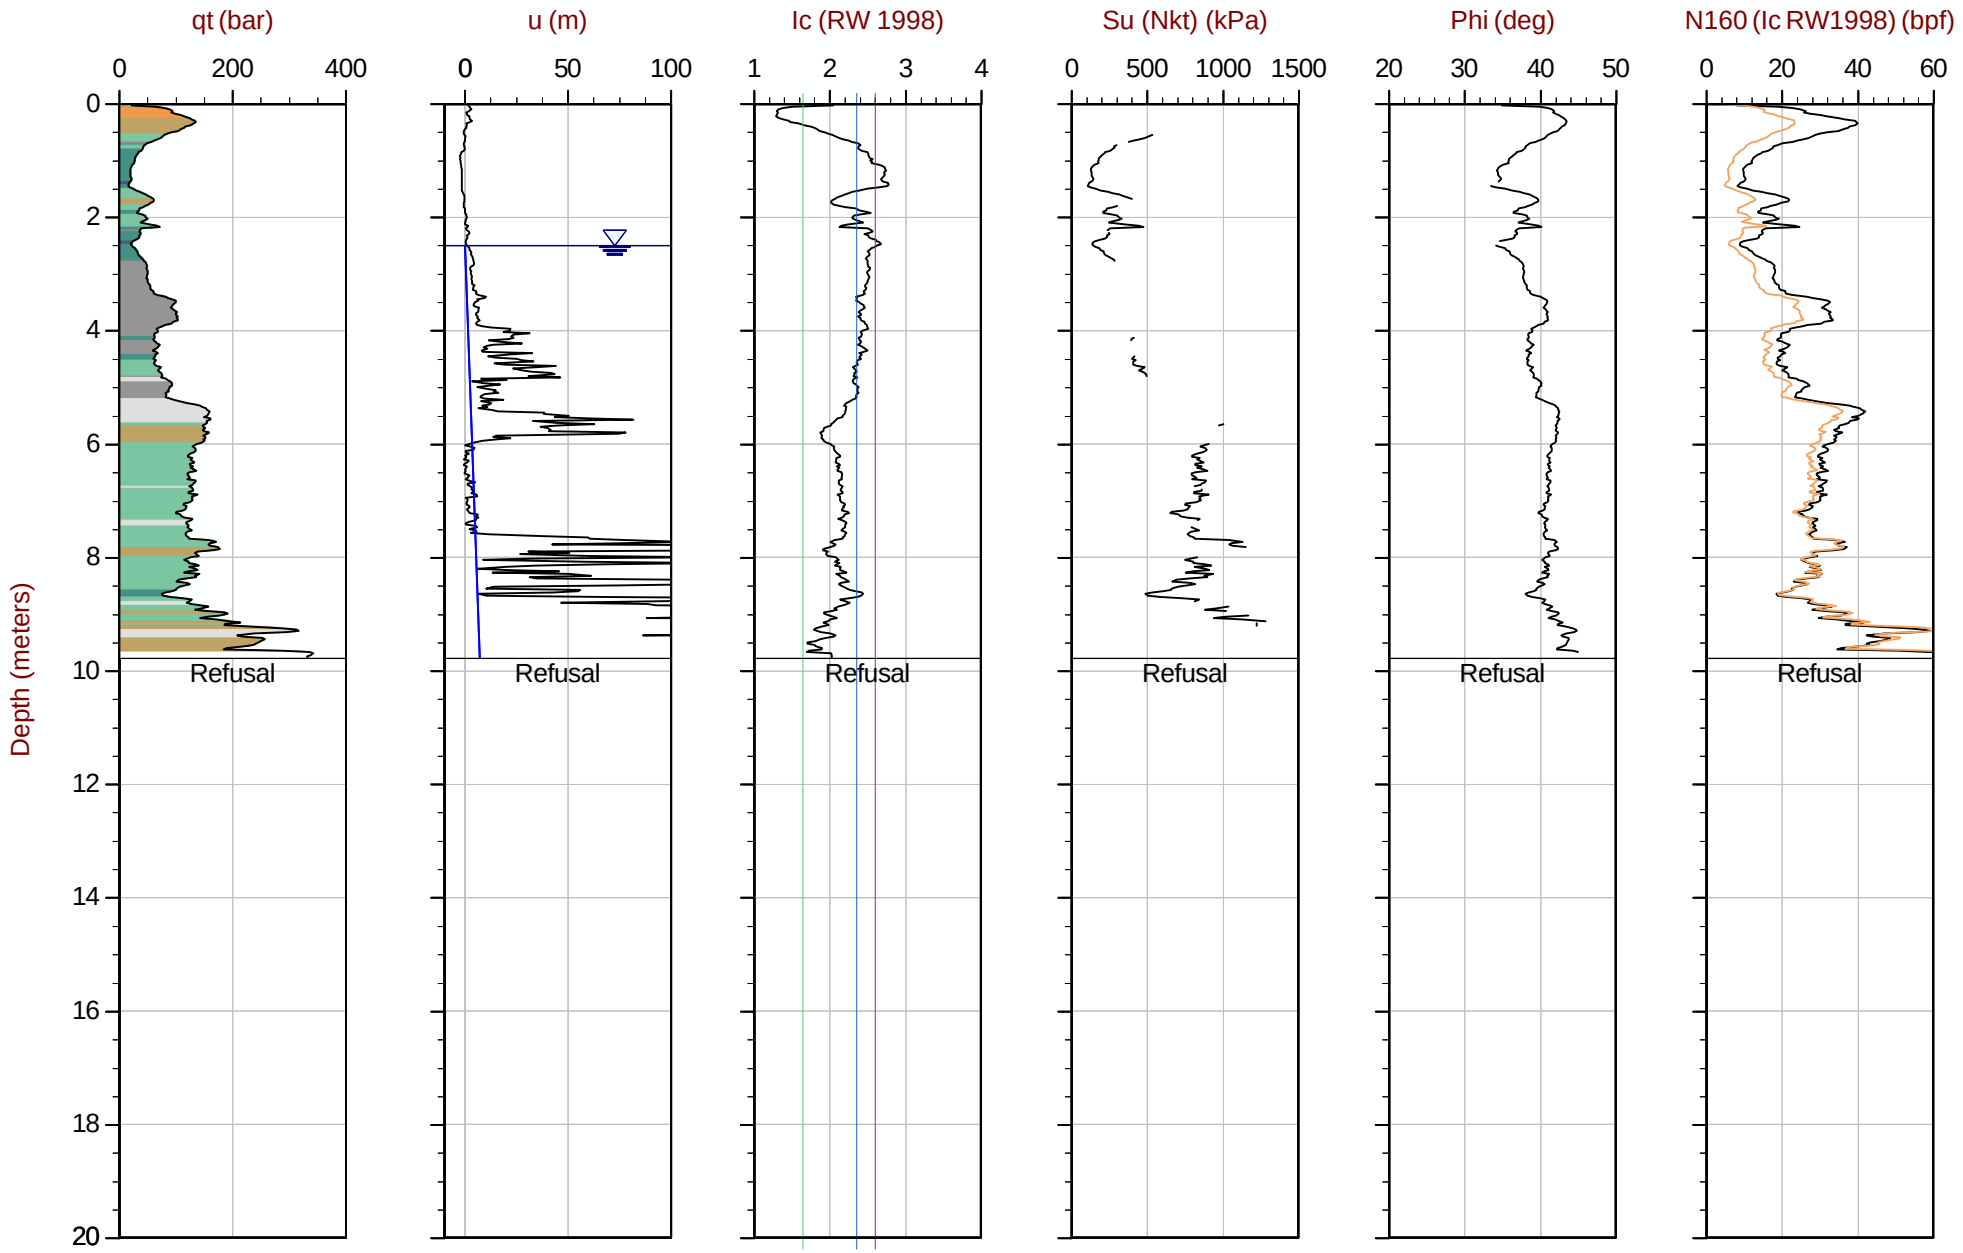

Max Depth: 9.775 m / 32.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131S1.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612504m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 10:23
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131S2
Cone: 822:T1000F10U35 Area= 15cm2

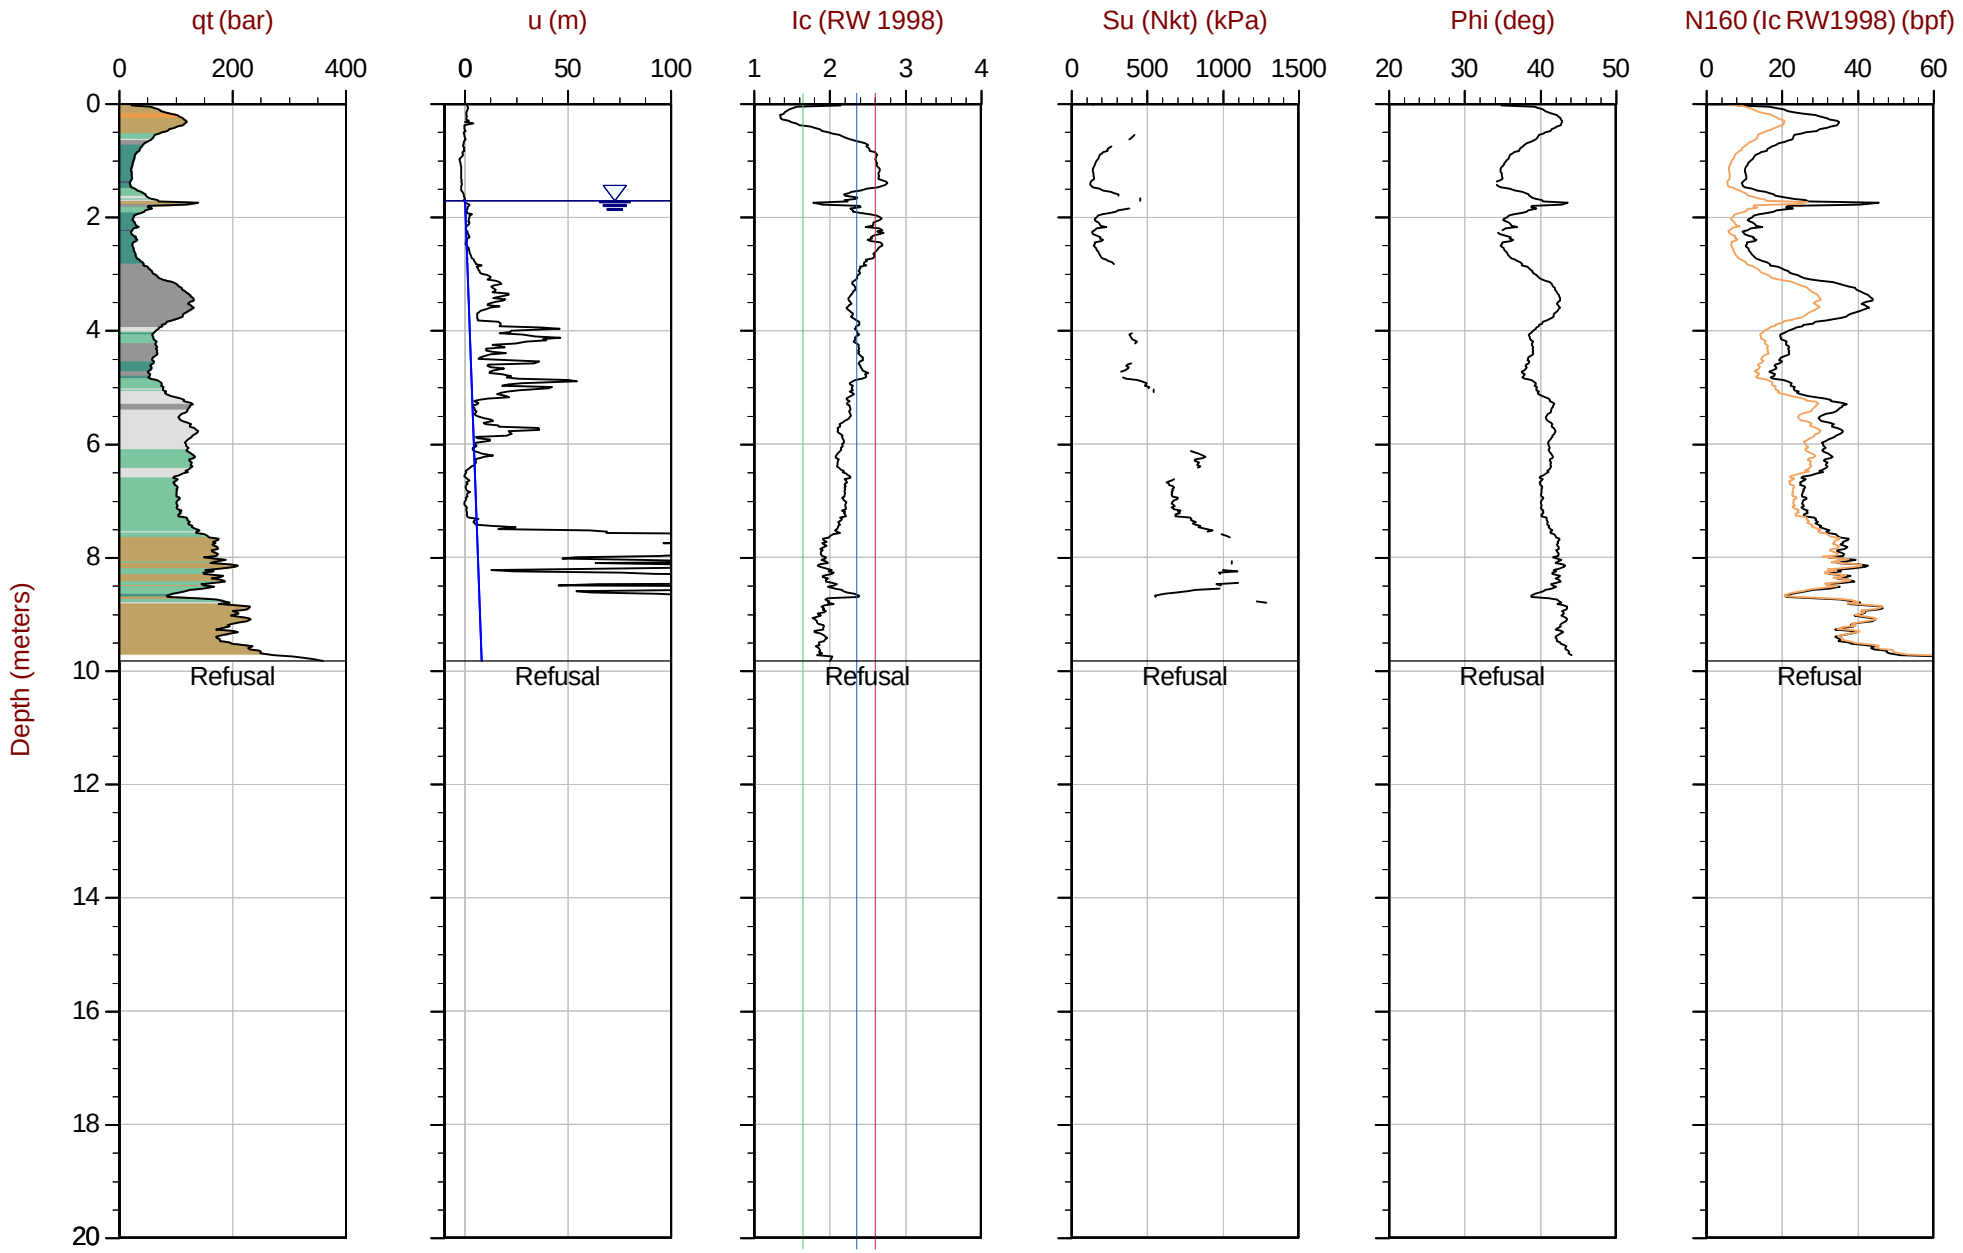

Max Depth: 9.825 m / 32.23 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131S2.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612500m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 16:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT132
Cone: 750:T1500F15U35 Area= 15cm2

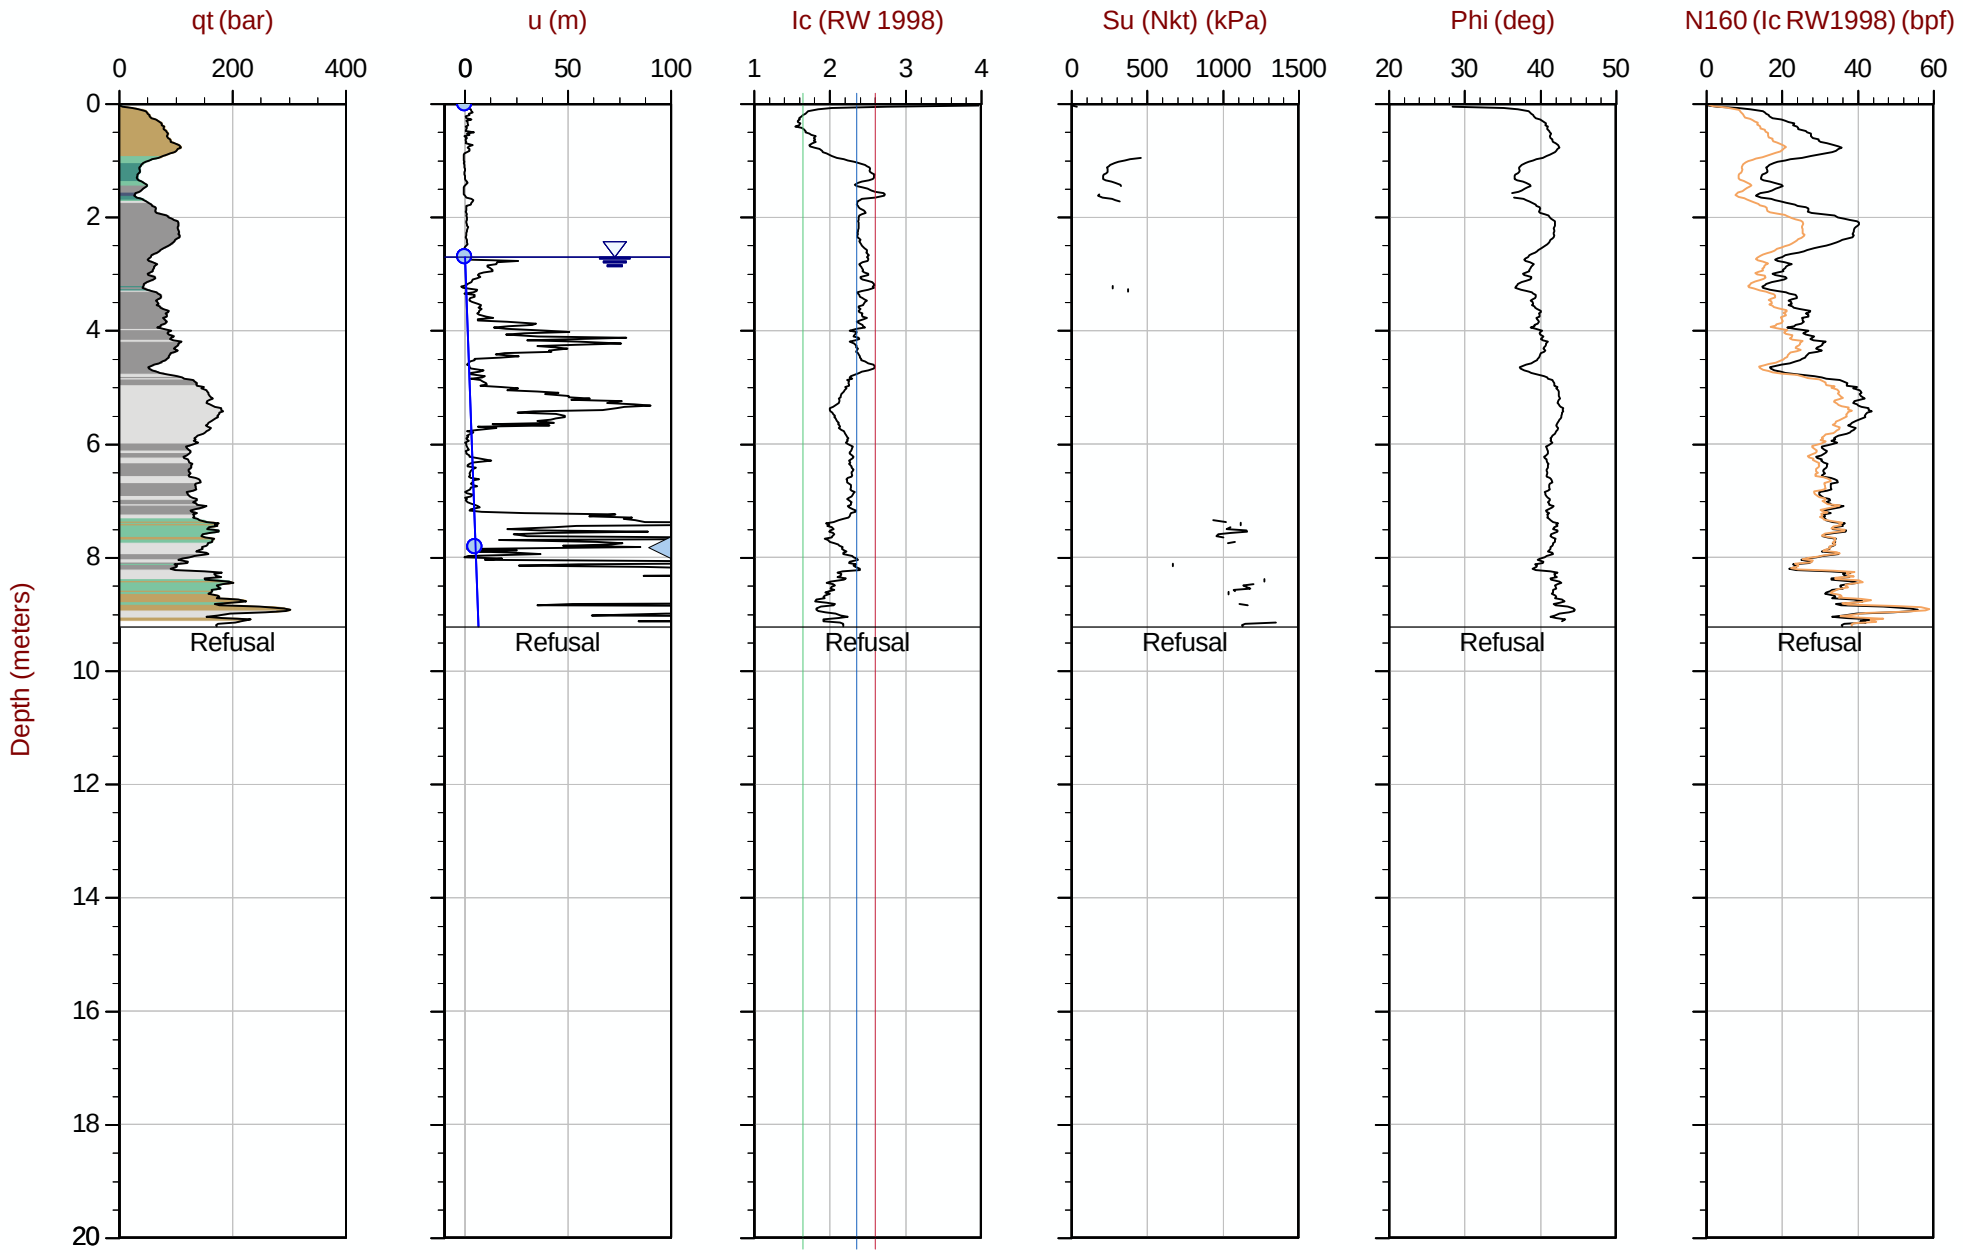

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT132.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612531m E: 416020m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 07:06
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT133
Cone: 750:T1500F15U35 Area= 15cm2

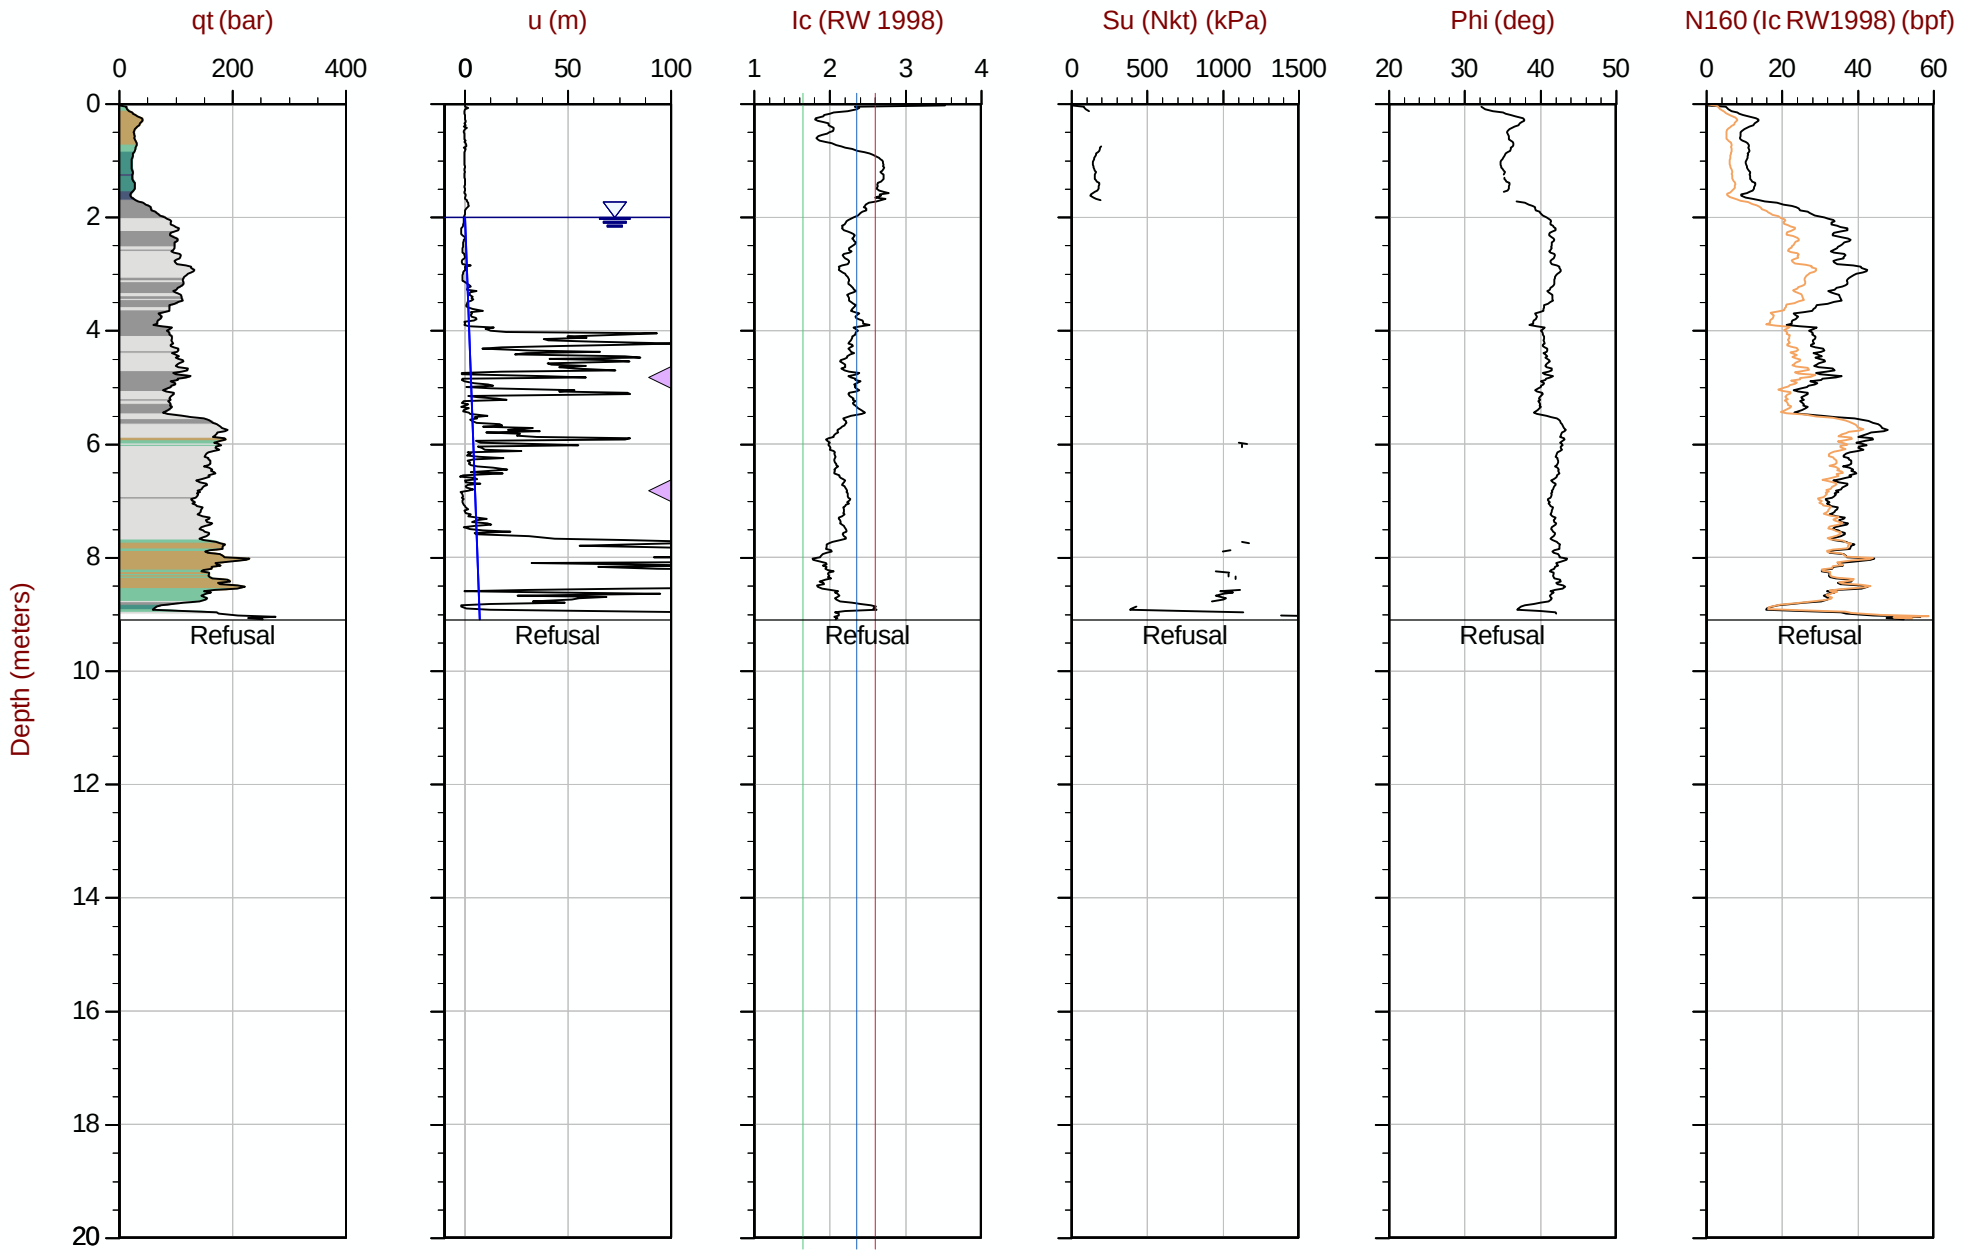

Max Depth: 9.100 m / 29.86 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT133.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612530m E: 416070m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 08:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT134
Cone: 750:T1500F15U35 Area= 15cm2

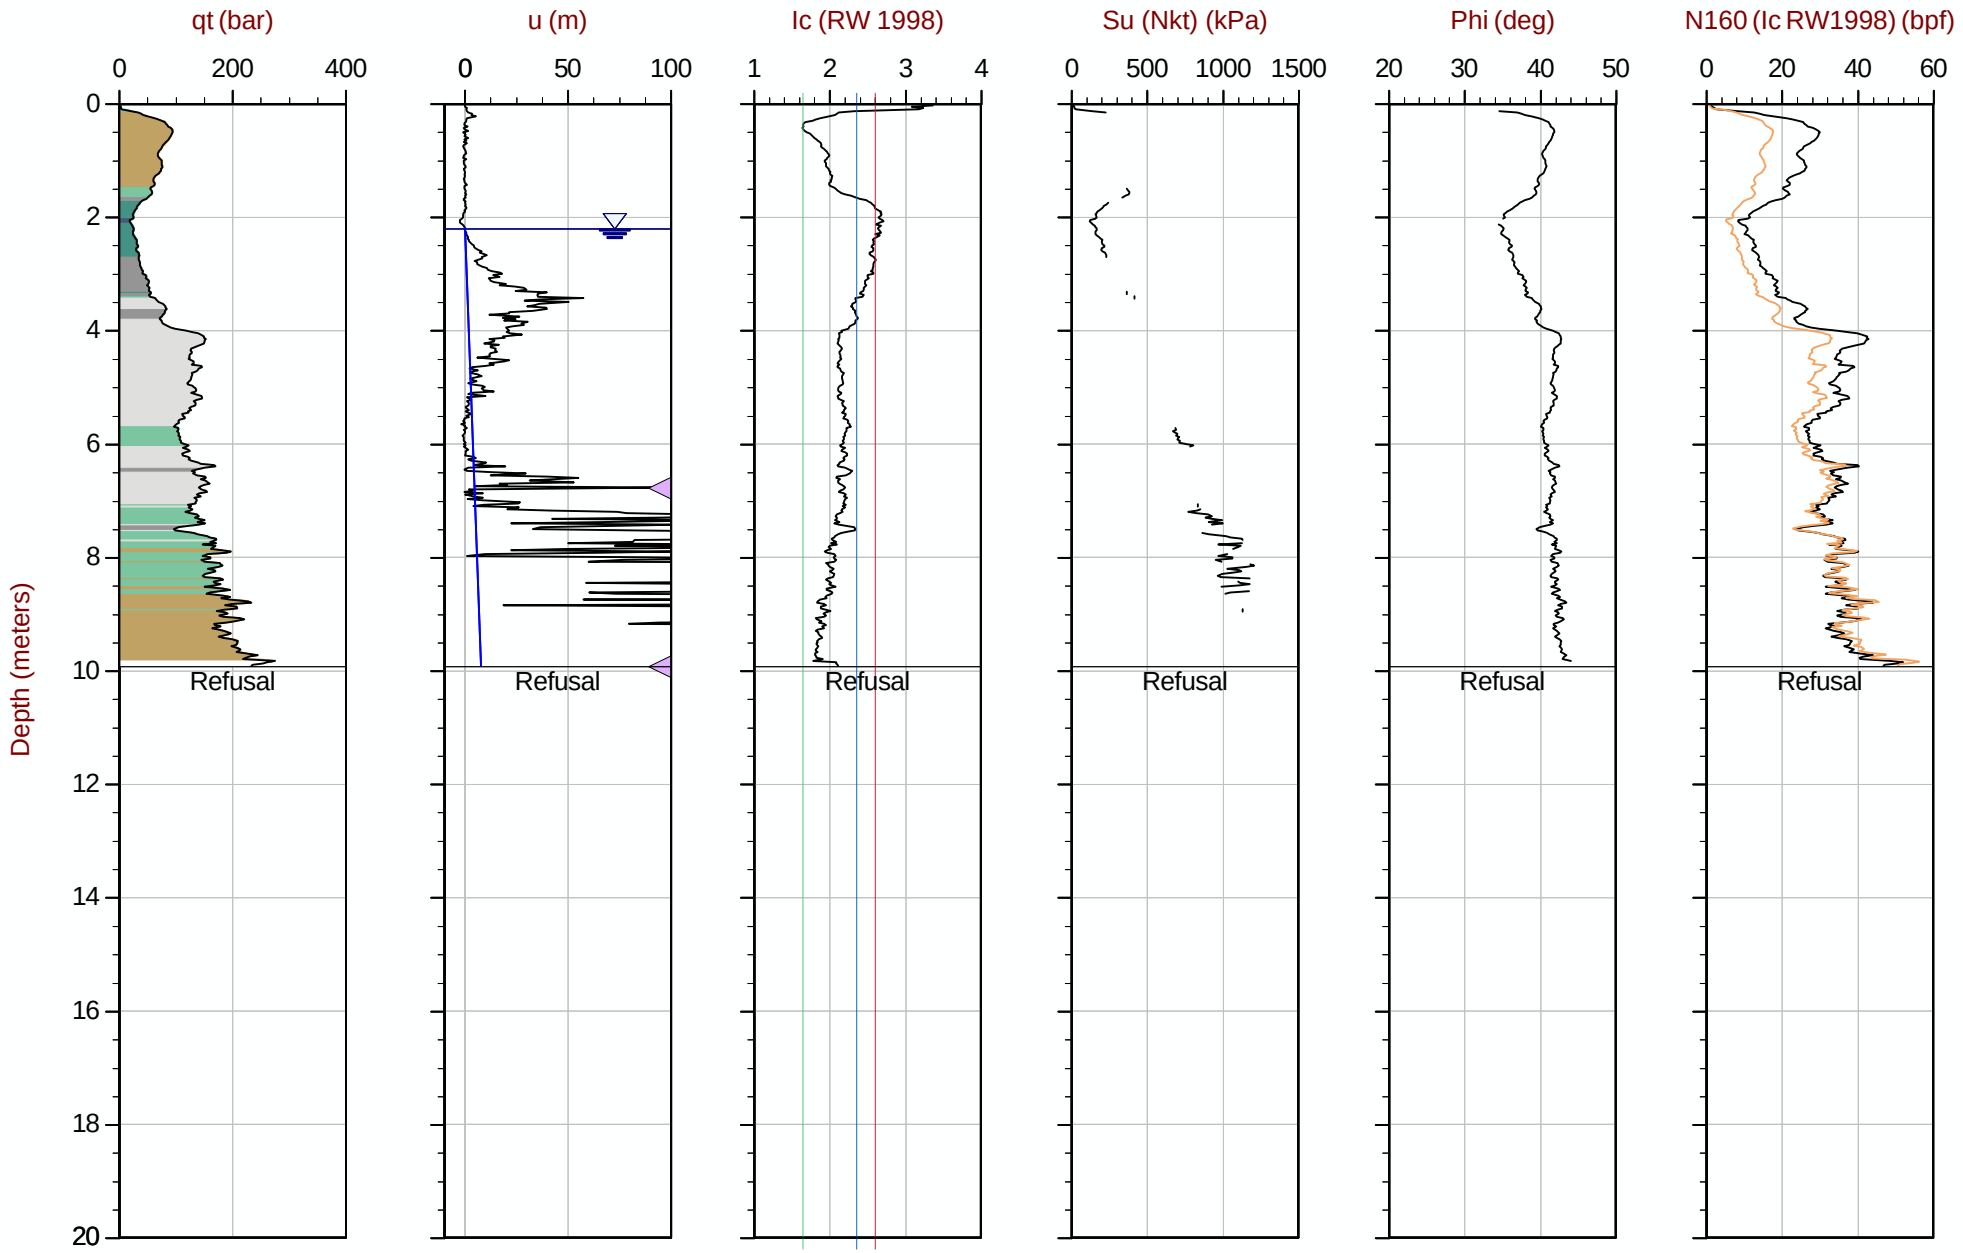

Max Depth: 9.925 m / 32.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT134.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612529m E: 416120m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 10:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT135
Cone: 750:T1500F15U35 Area= 15cm2

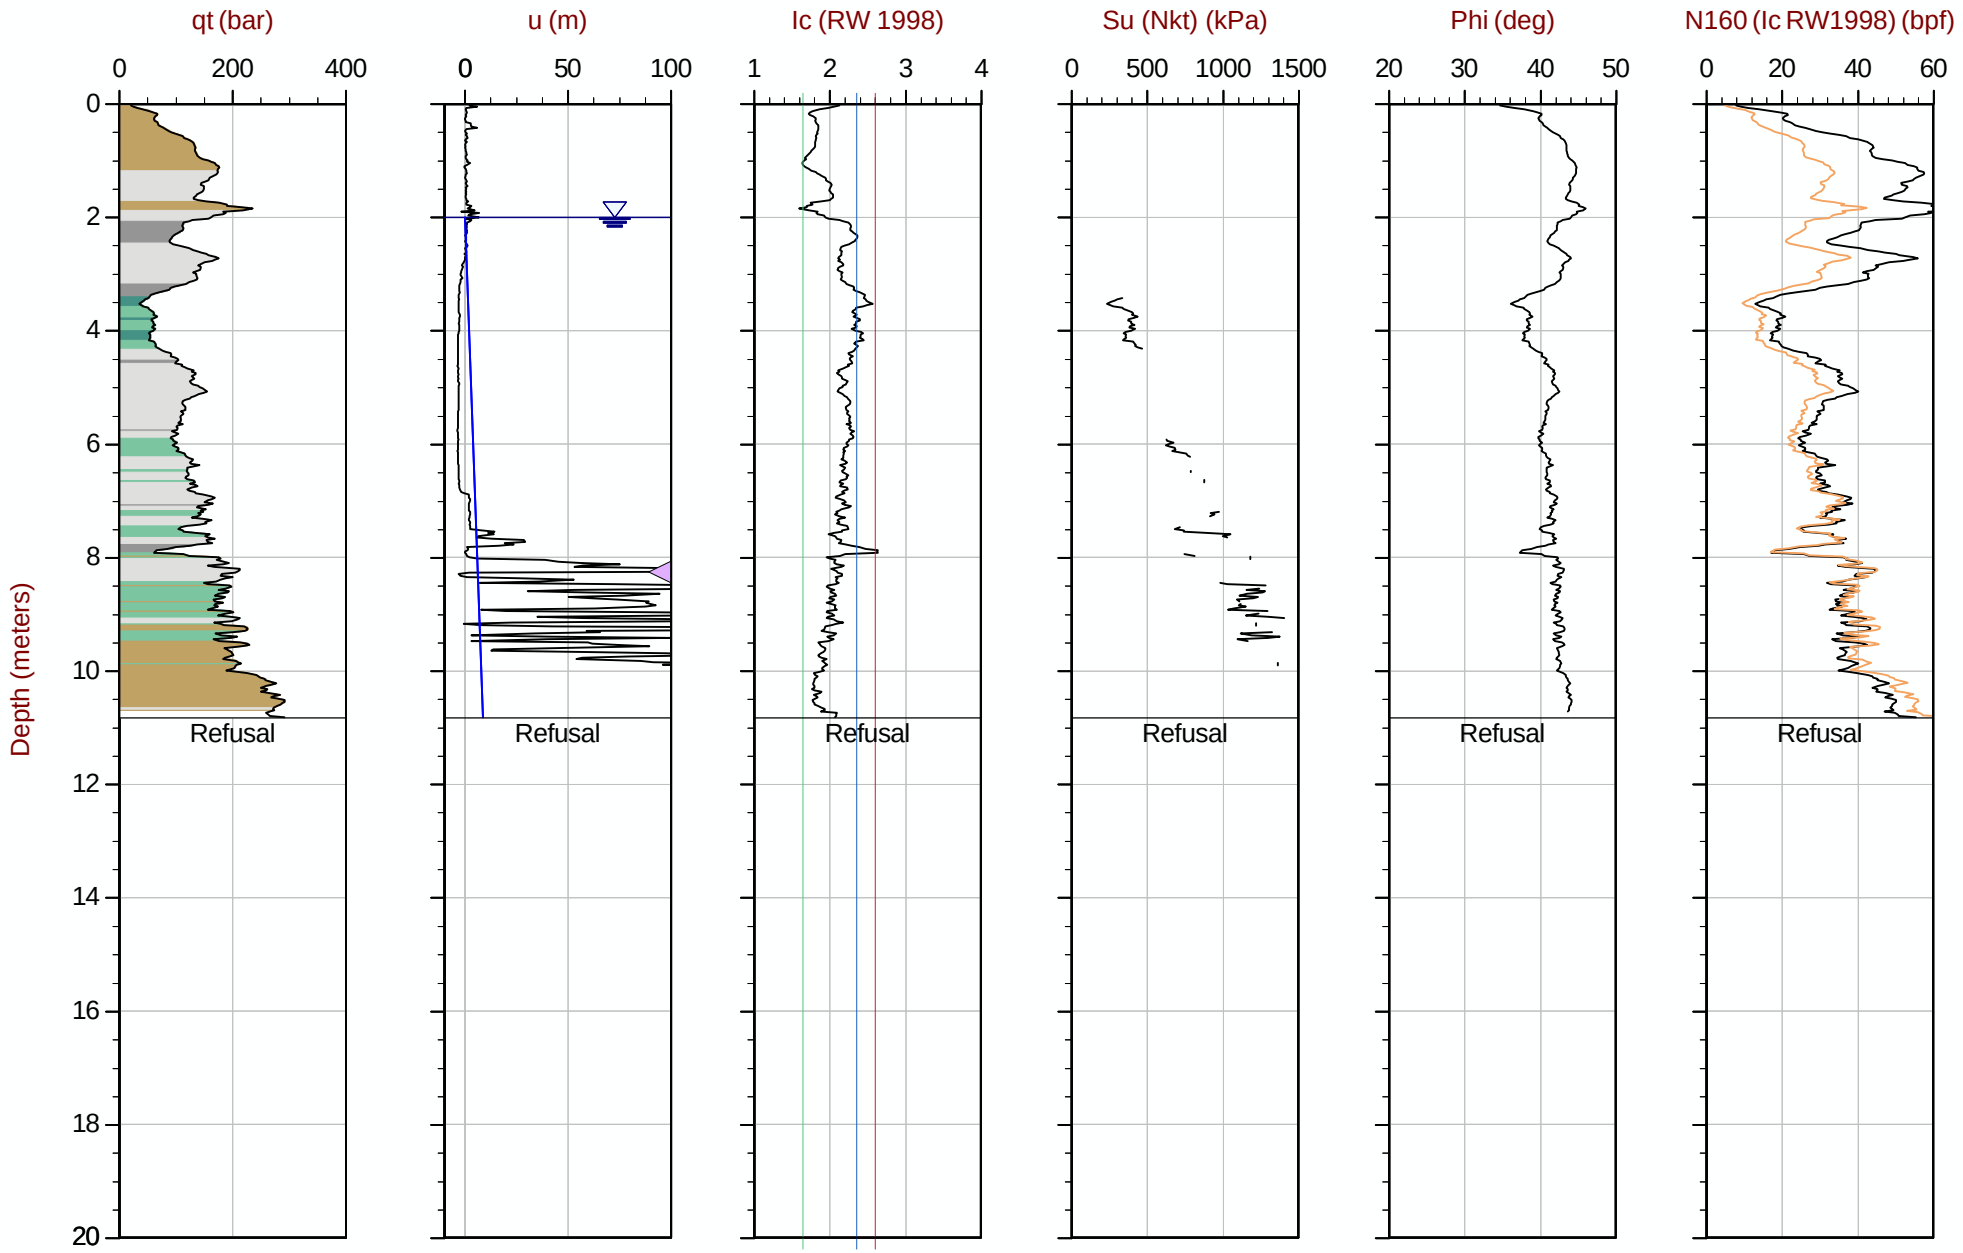

Max Depth: 10.825 m / 35.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT135.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612528m E: 416170m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 11:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT136
Cone: 750:T1500F15U35 Area= 15cm2

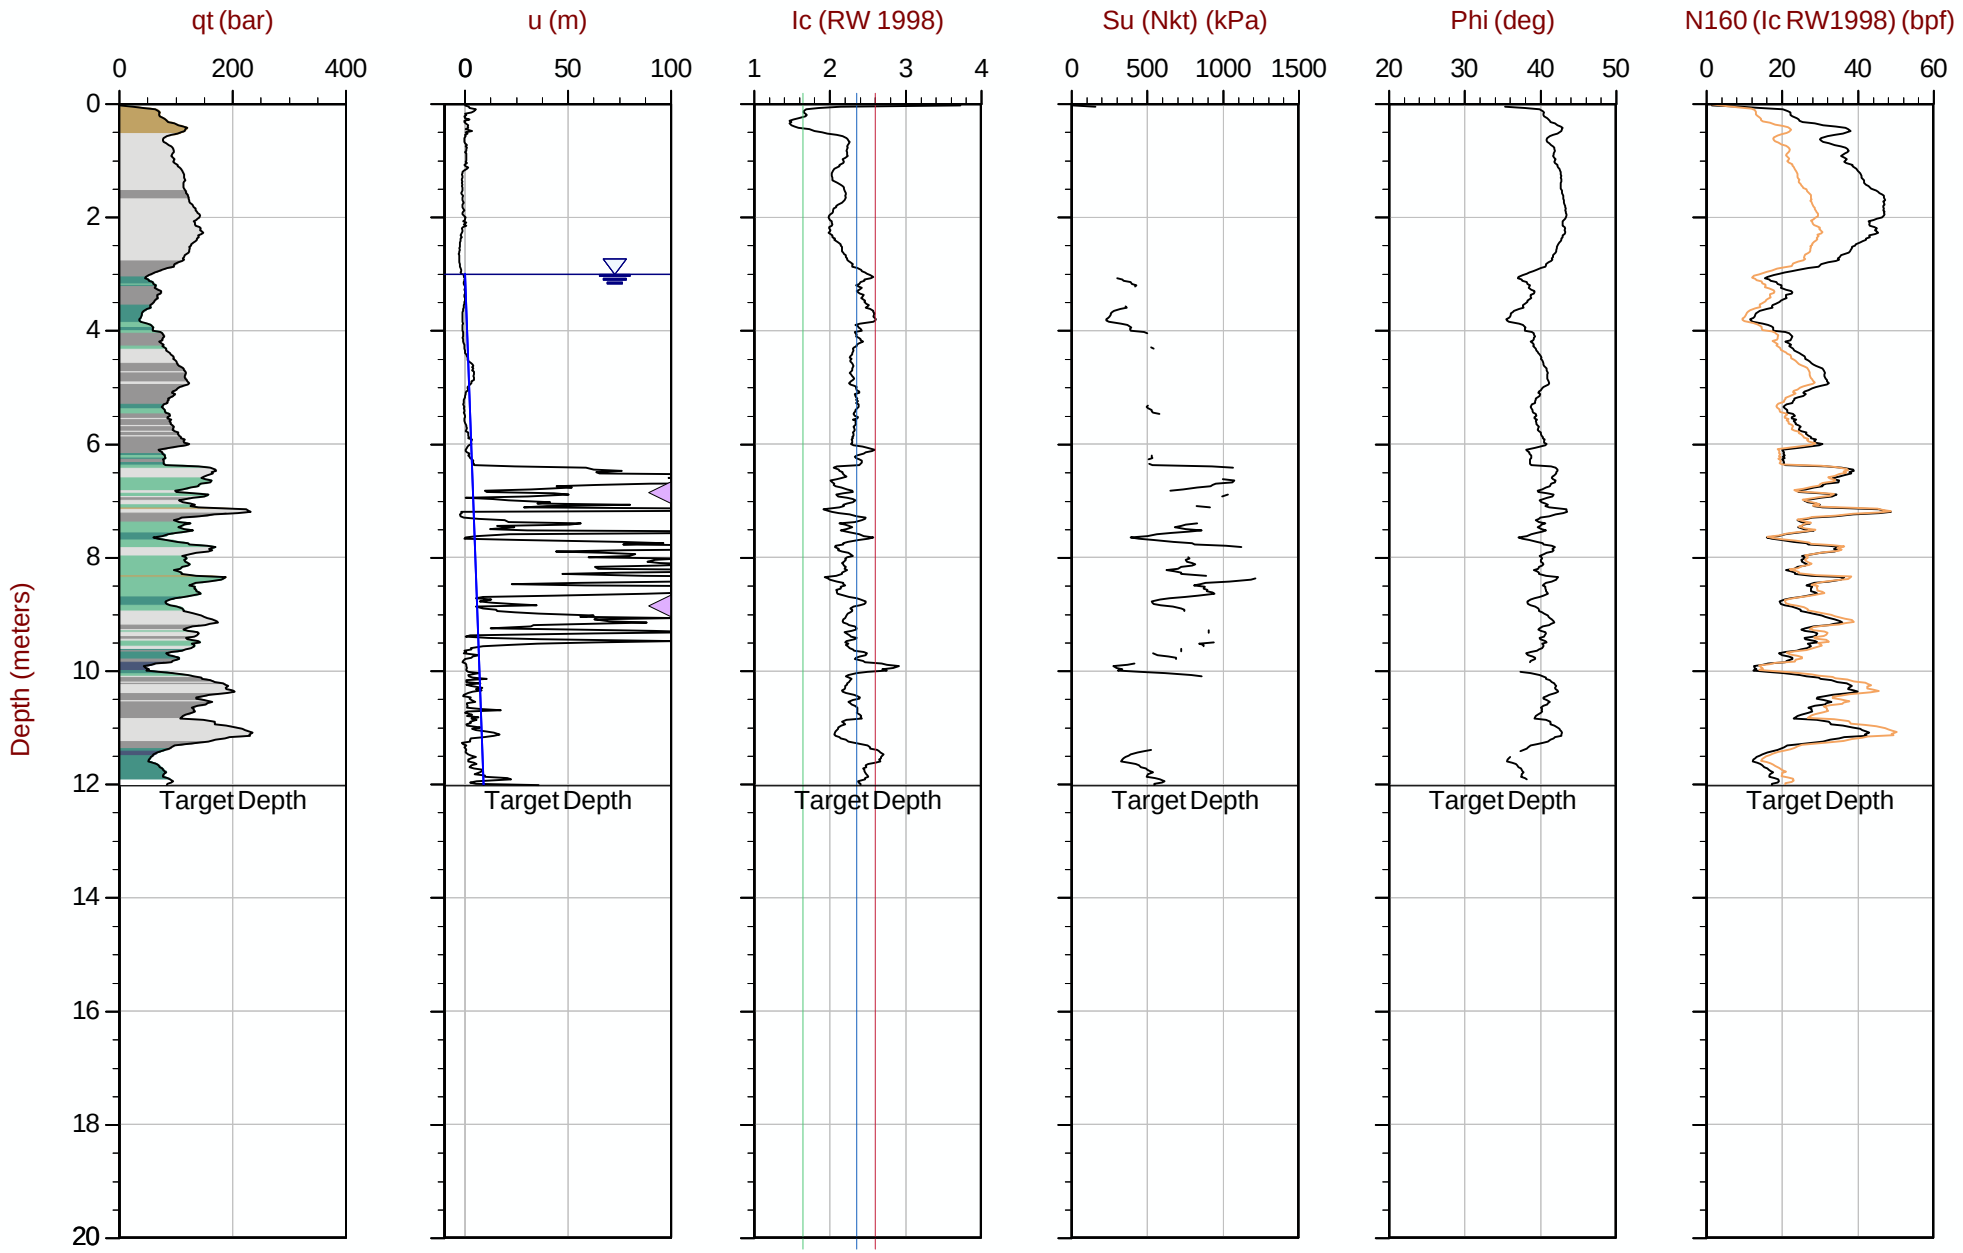

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT136.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612526m E: 416220m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 12:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT137
Cone: 750:T1500F15U35 Area= 15cm2

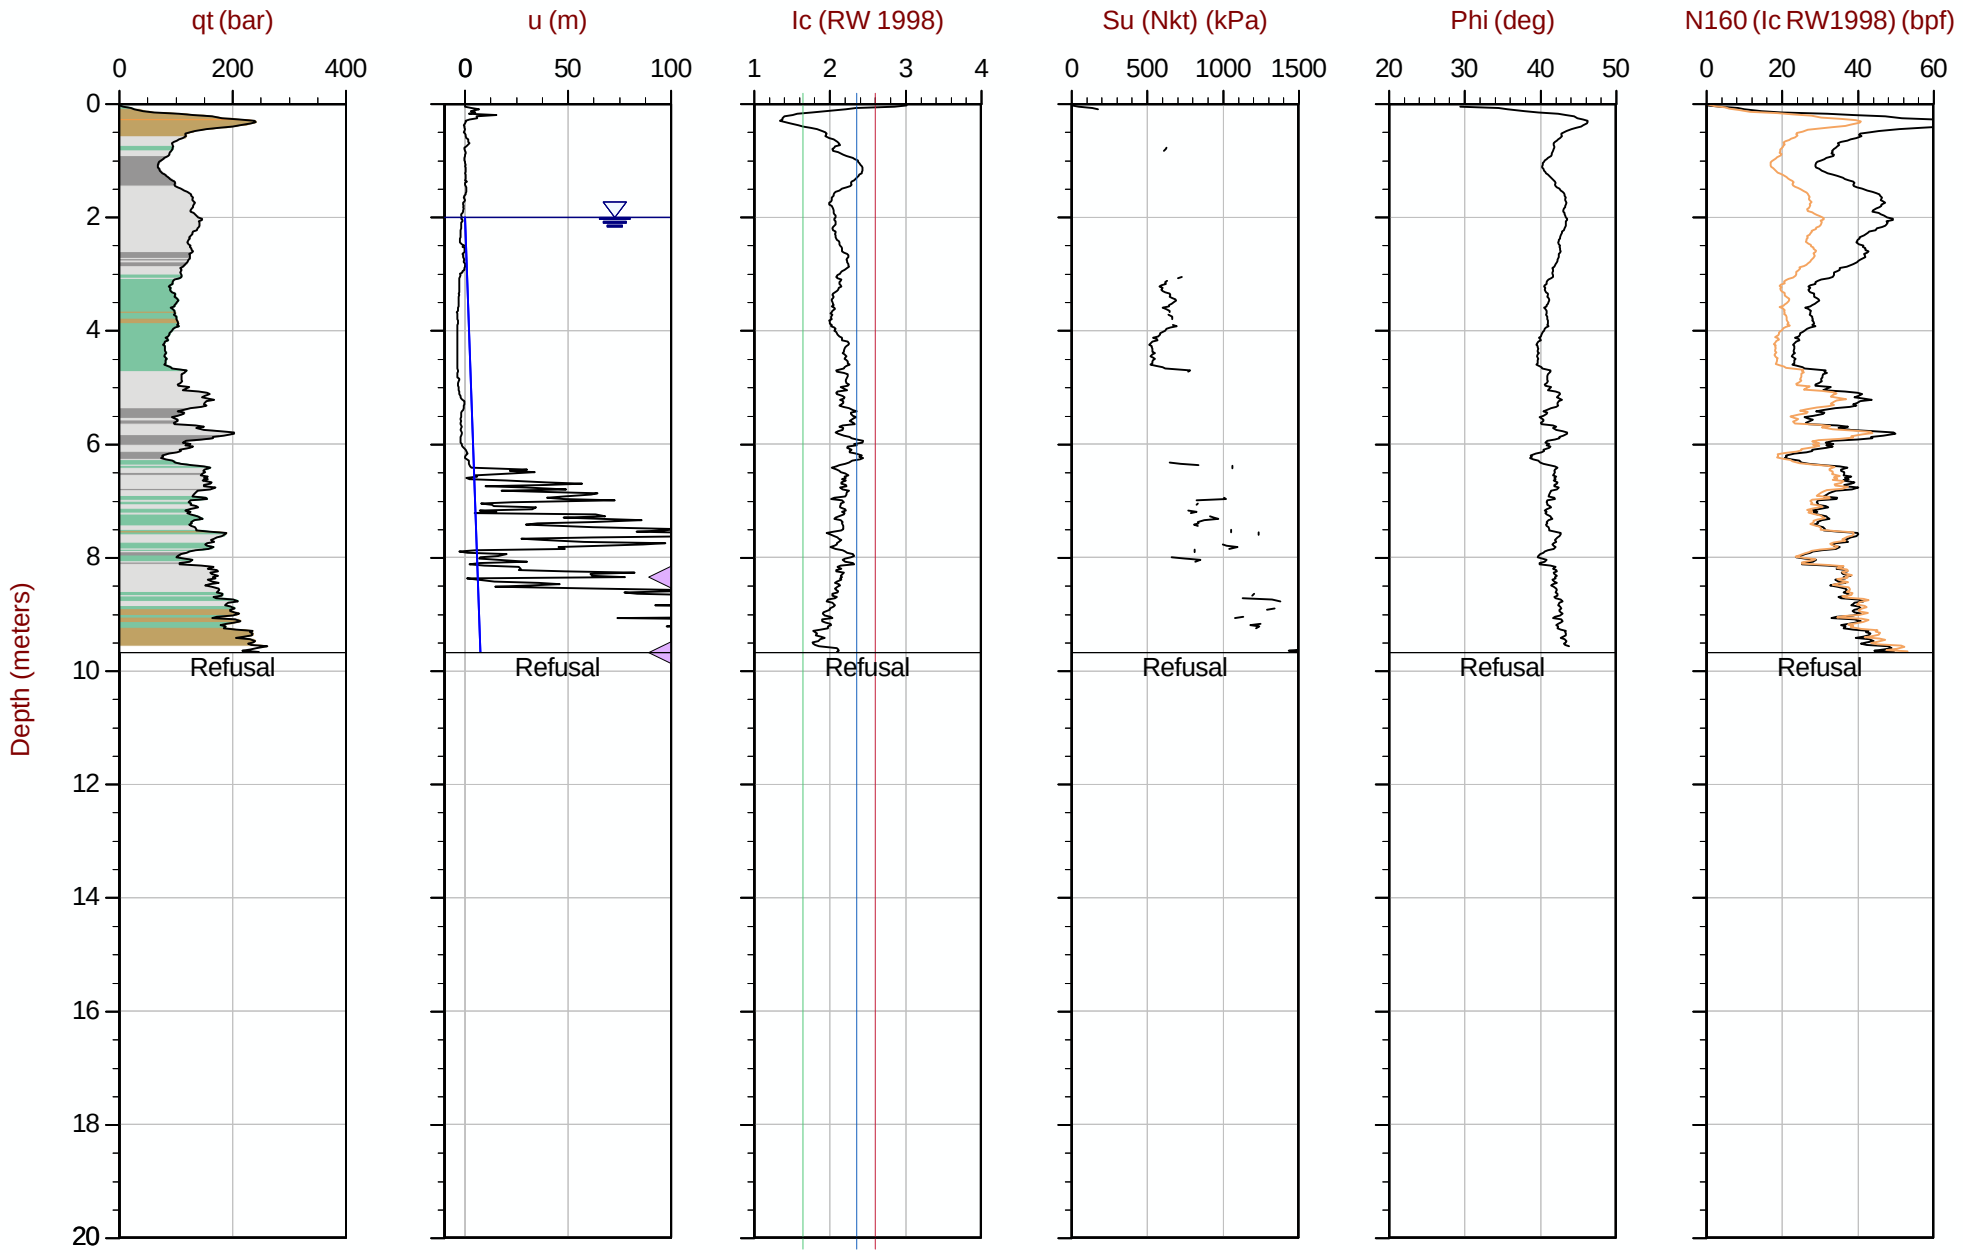

Max Depth: 9.675 m / 31.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT137.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612525m E: 416270m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 14:22
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT138
Cone: 854:T1500F15U35 Area= 15cm2

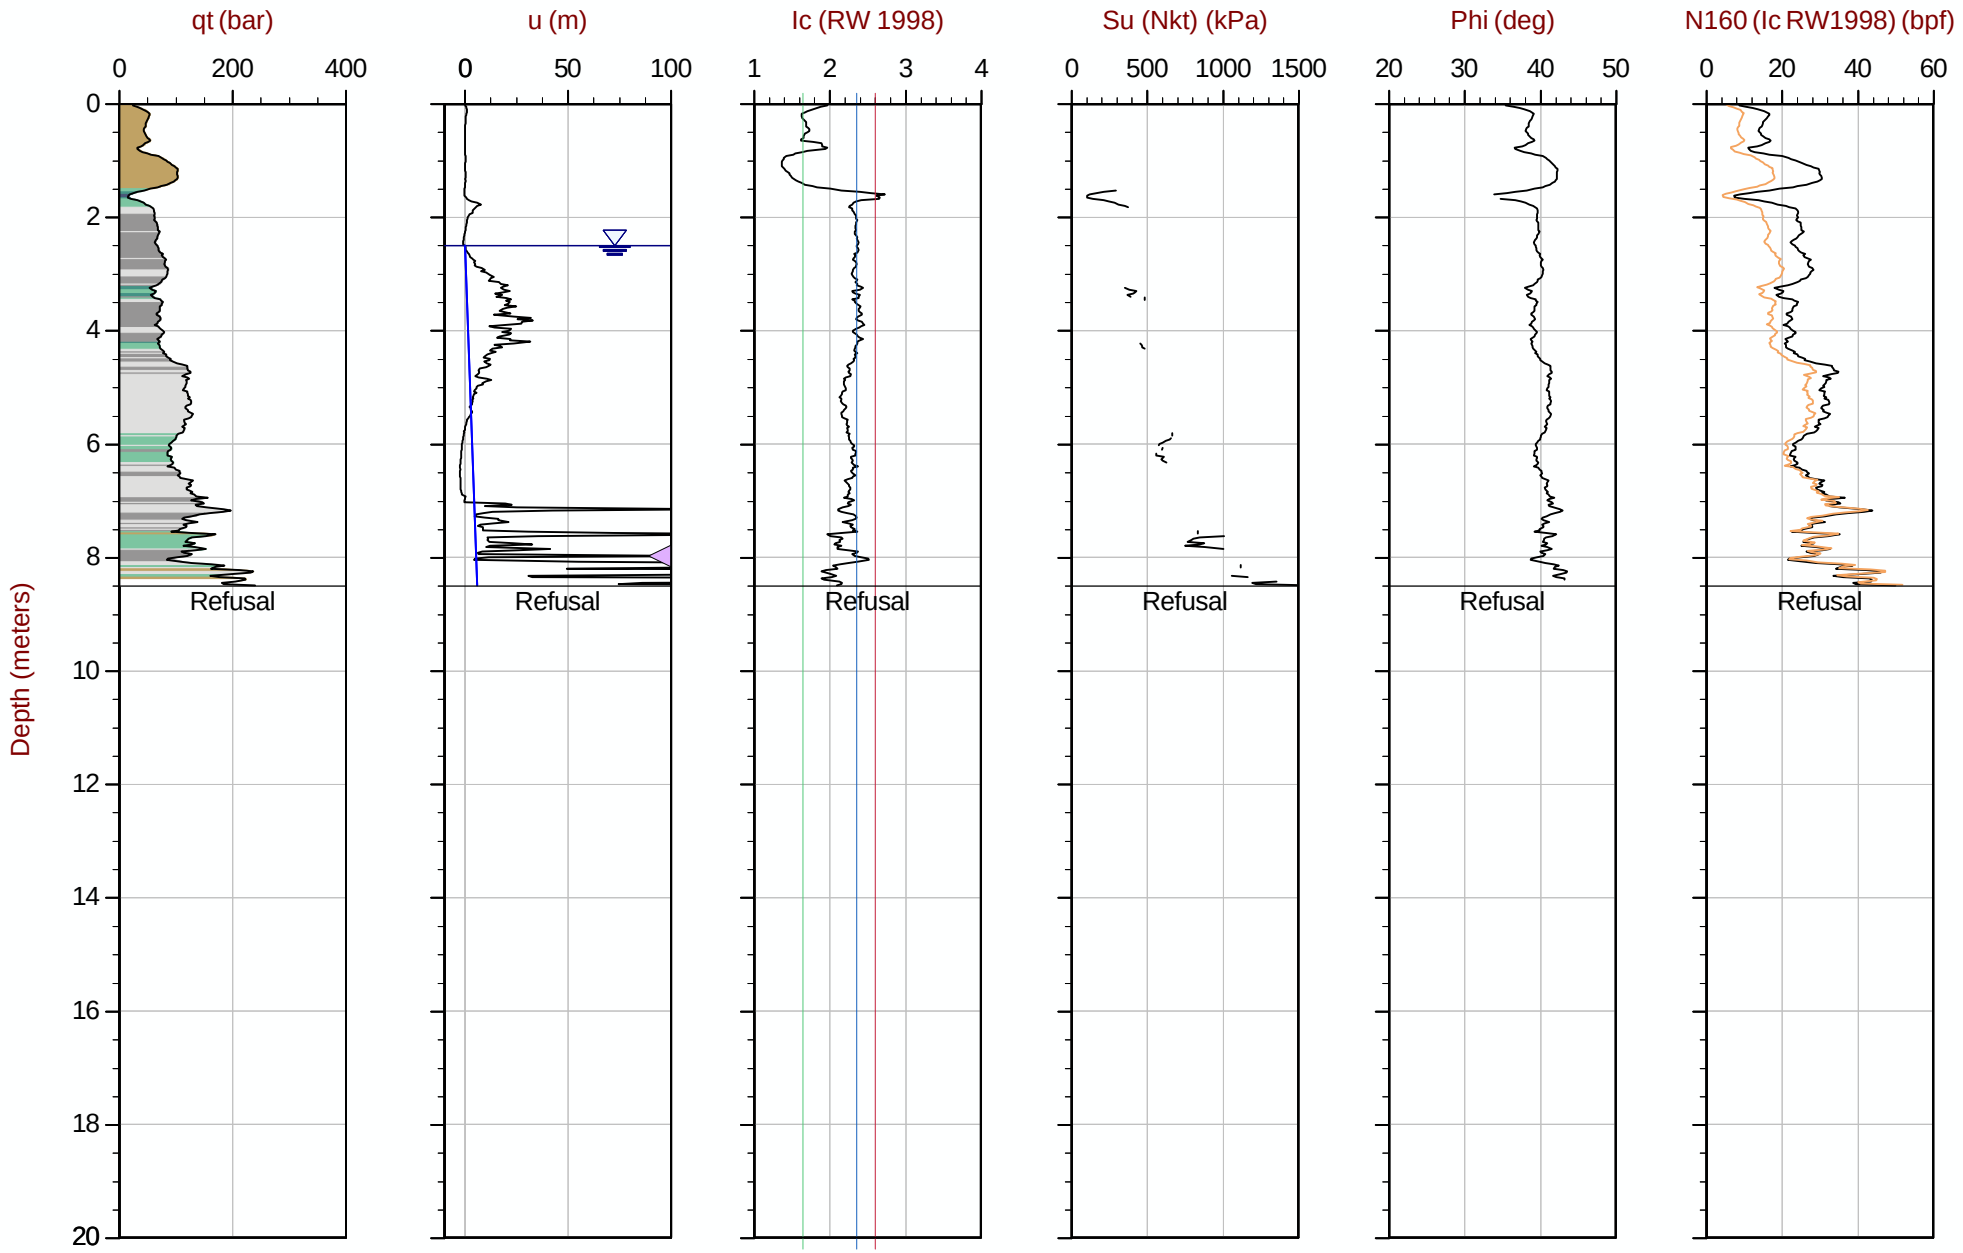

Max Depth: 8.500 m / 27.89 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT138.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612524m E: 416320m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 15:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT139
Cone: 854:T1500F15U35 Area= 15cm2

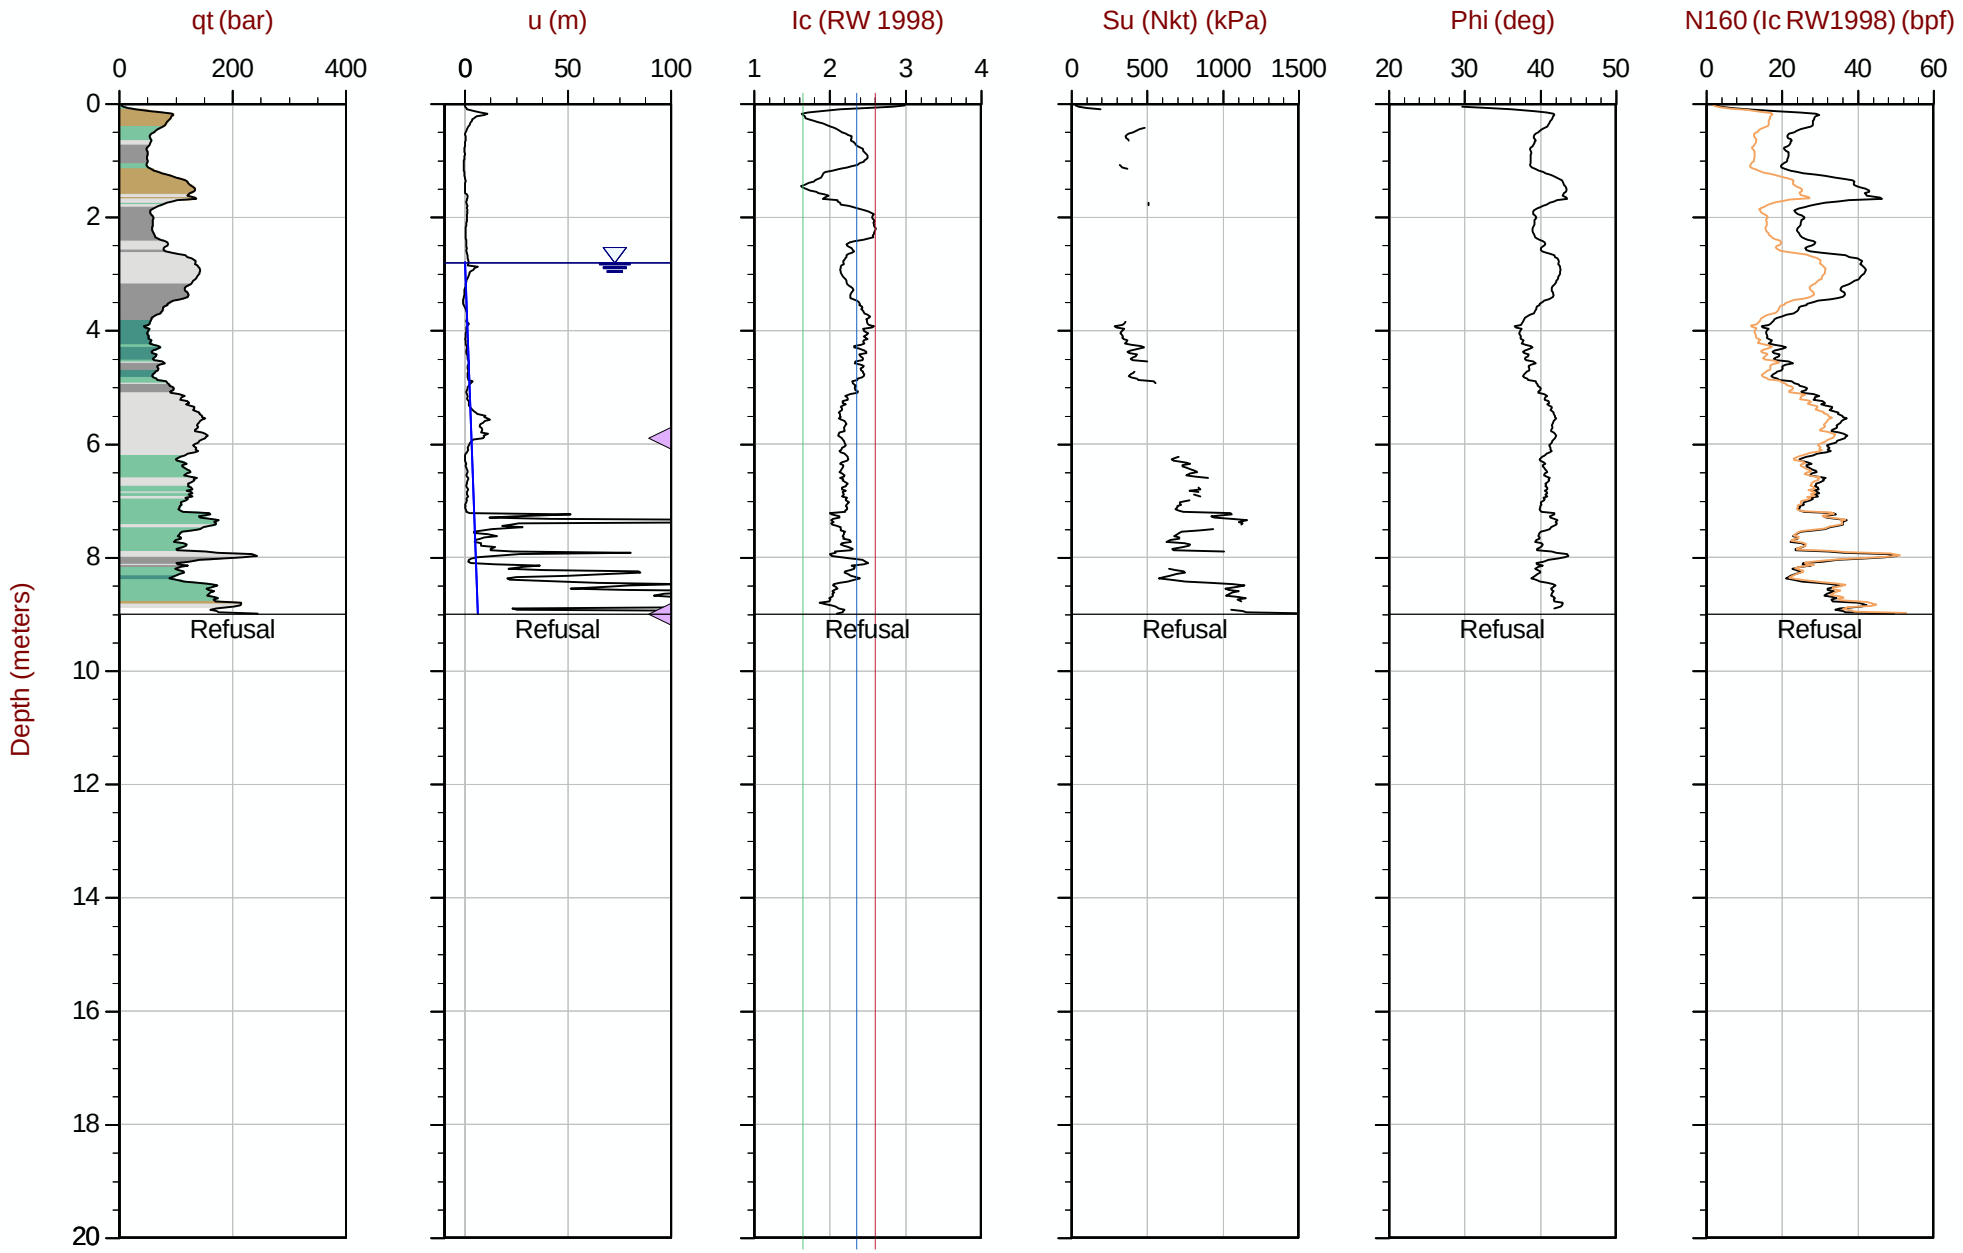

Max Depth: 9.000 m / 29.53 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT139.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612523m E: 416370m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 16:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT140
Cone: 854:T1500F15U35 Area= 15cm2

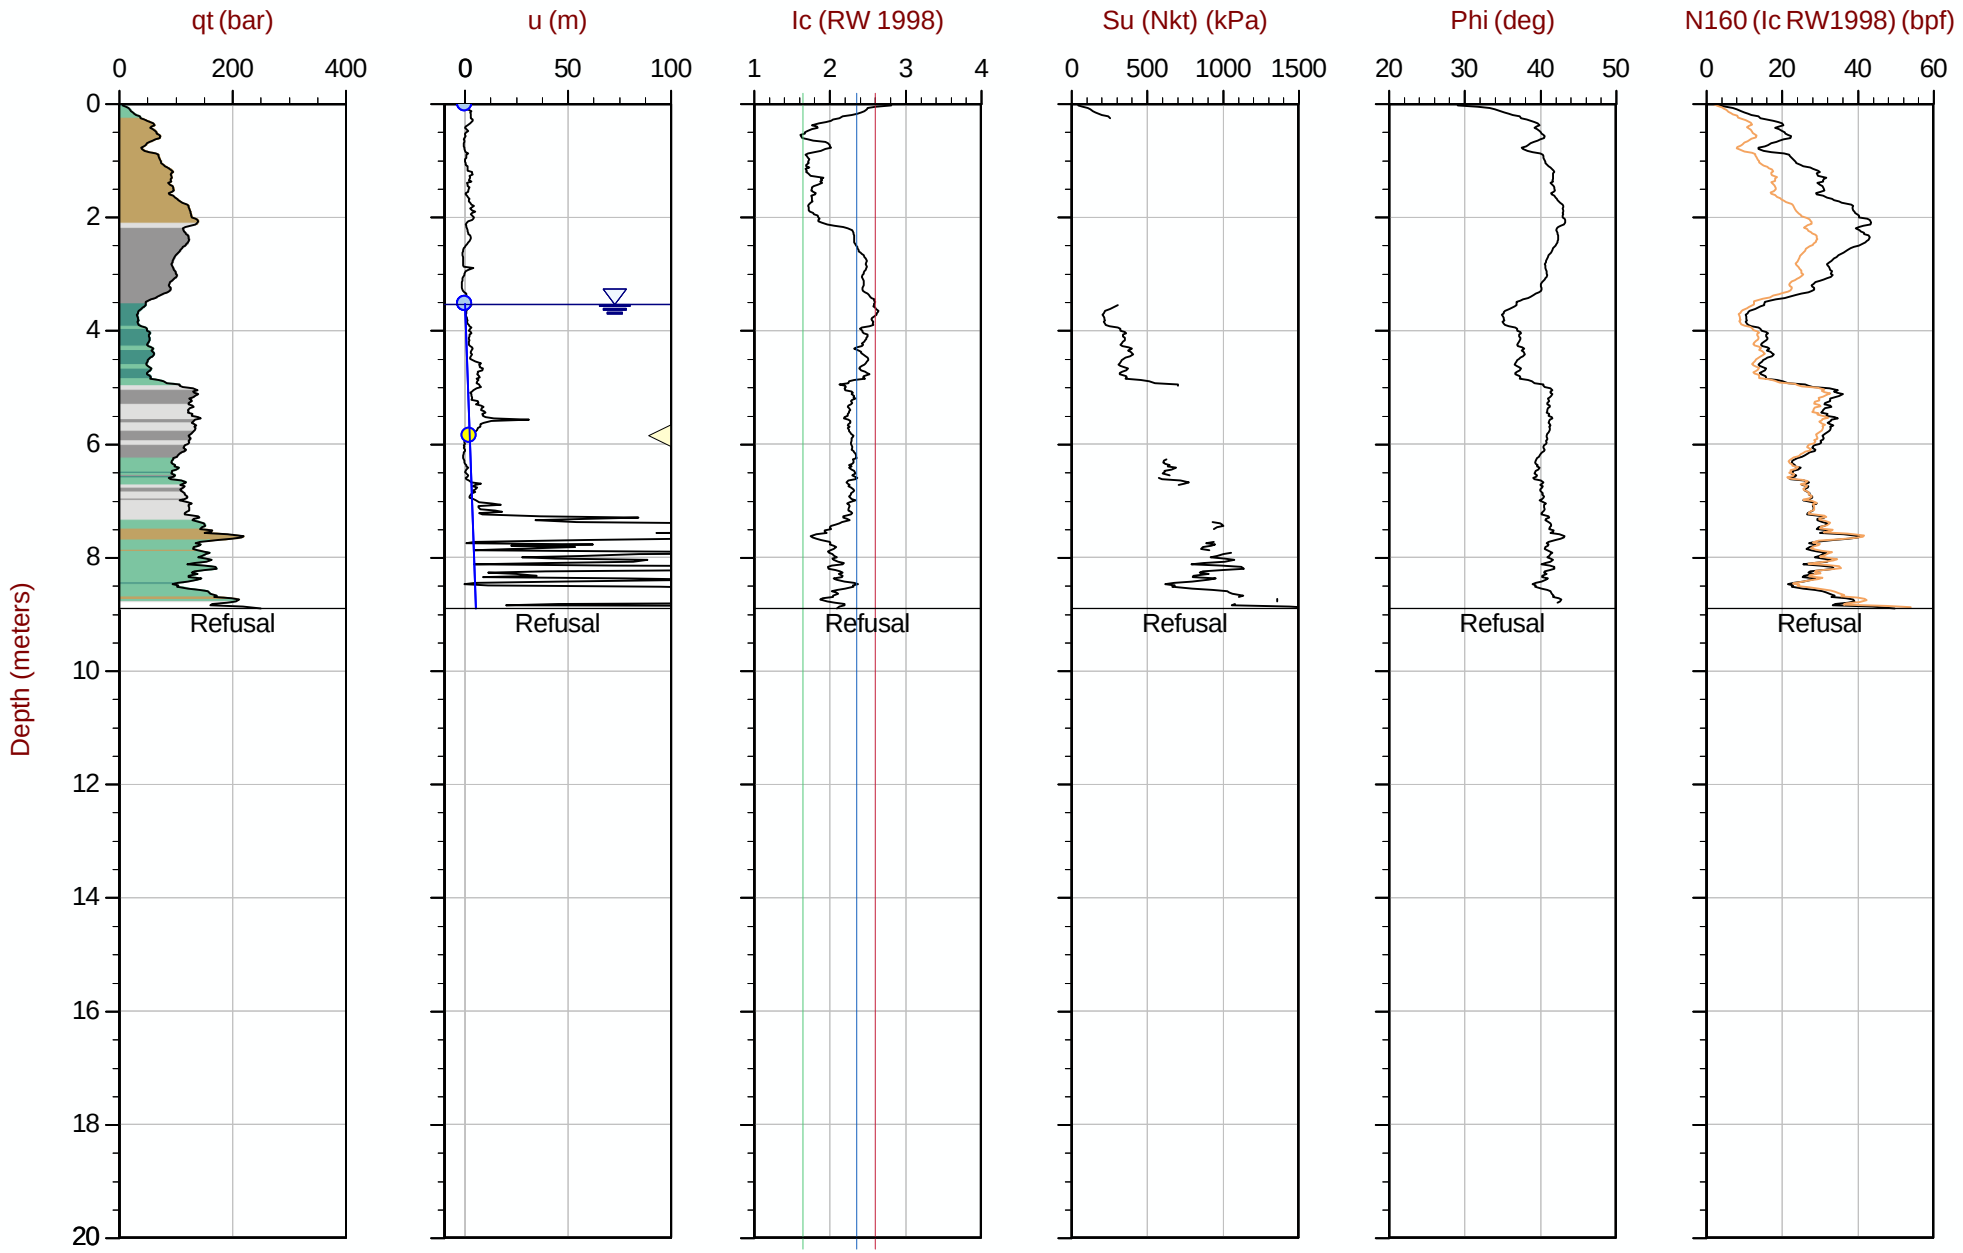

Max Depth: 8.900 m / 29.20 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT140.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612522m E: 416419m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 07:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT141
Cone: 854:T1500F15U35 Area= 15cm2

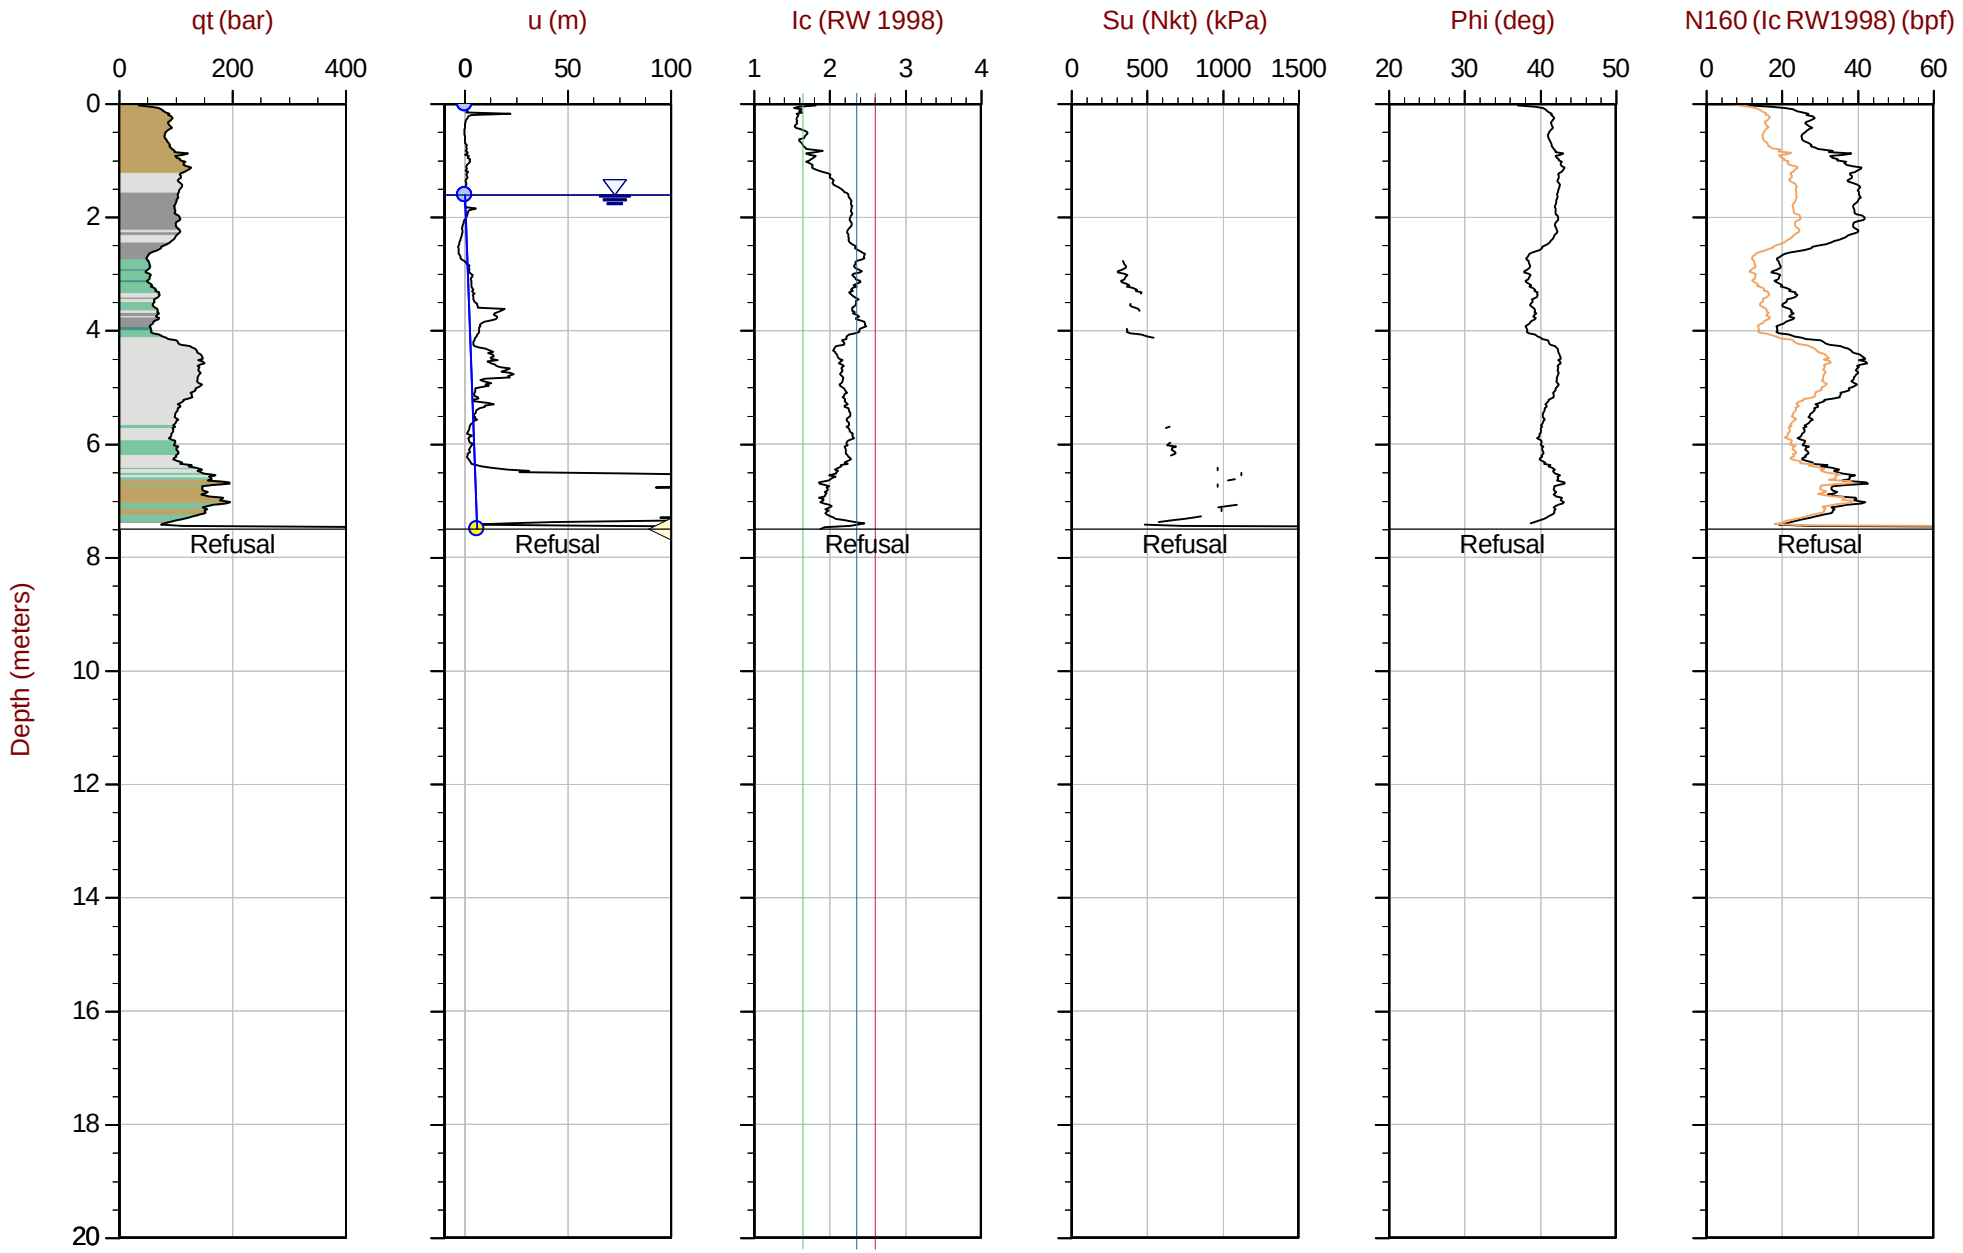

Max Depth: 7.500 m / 24.61 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT141.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612521m E: 416470m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 09:39
Site: Brooks, Alberta

Sounding: RCPT22-22CPT142
Cone: 854:T1500F15U35 Area= 15cm2

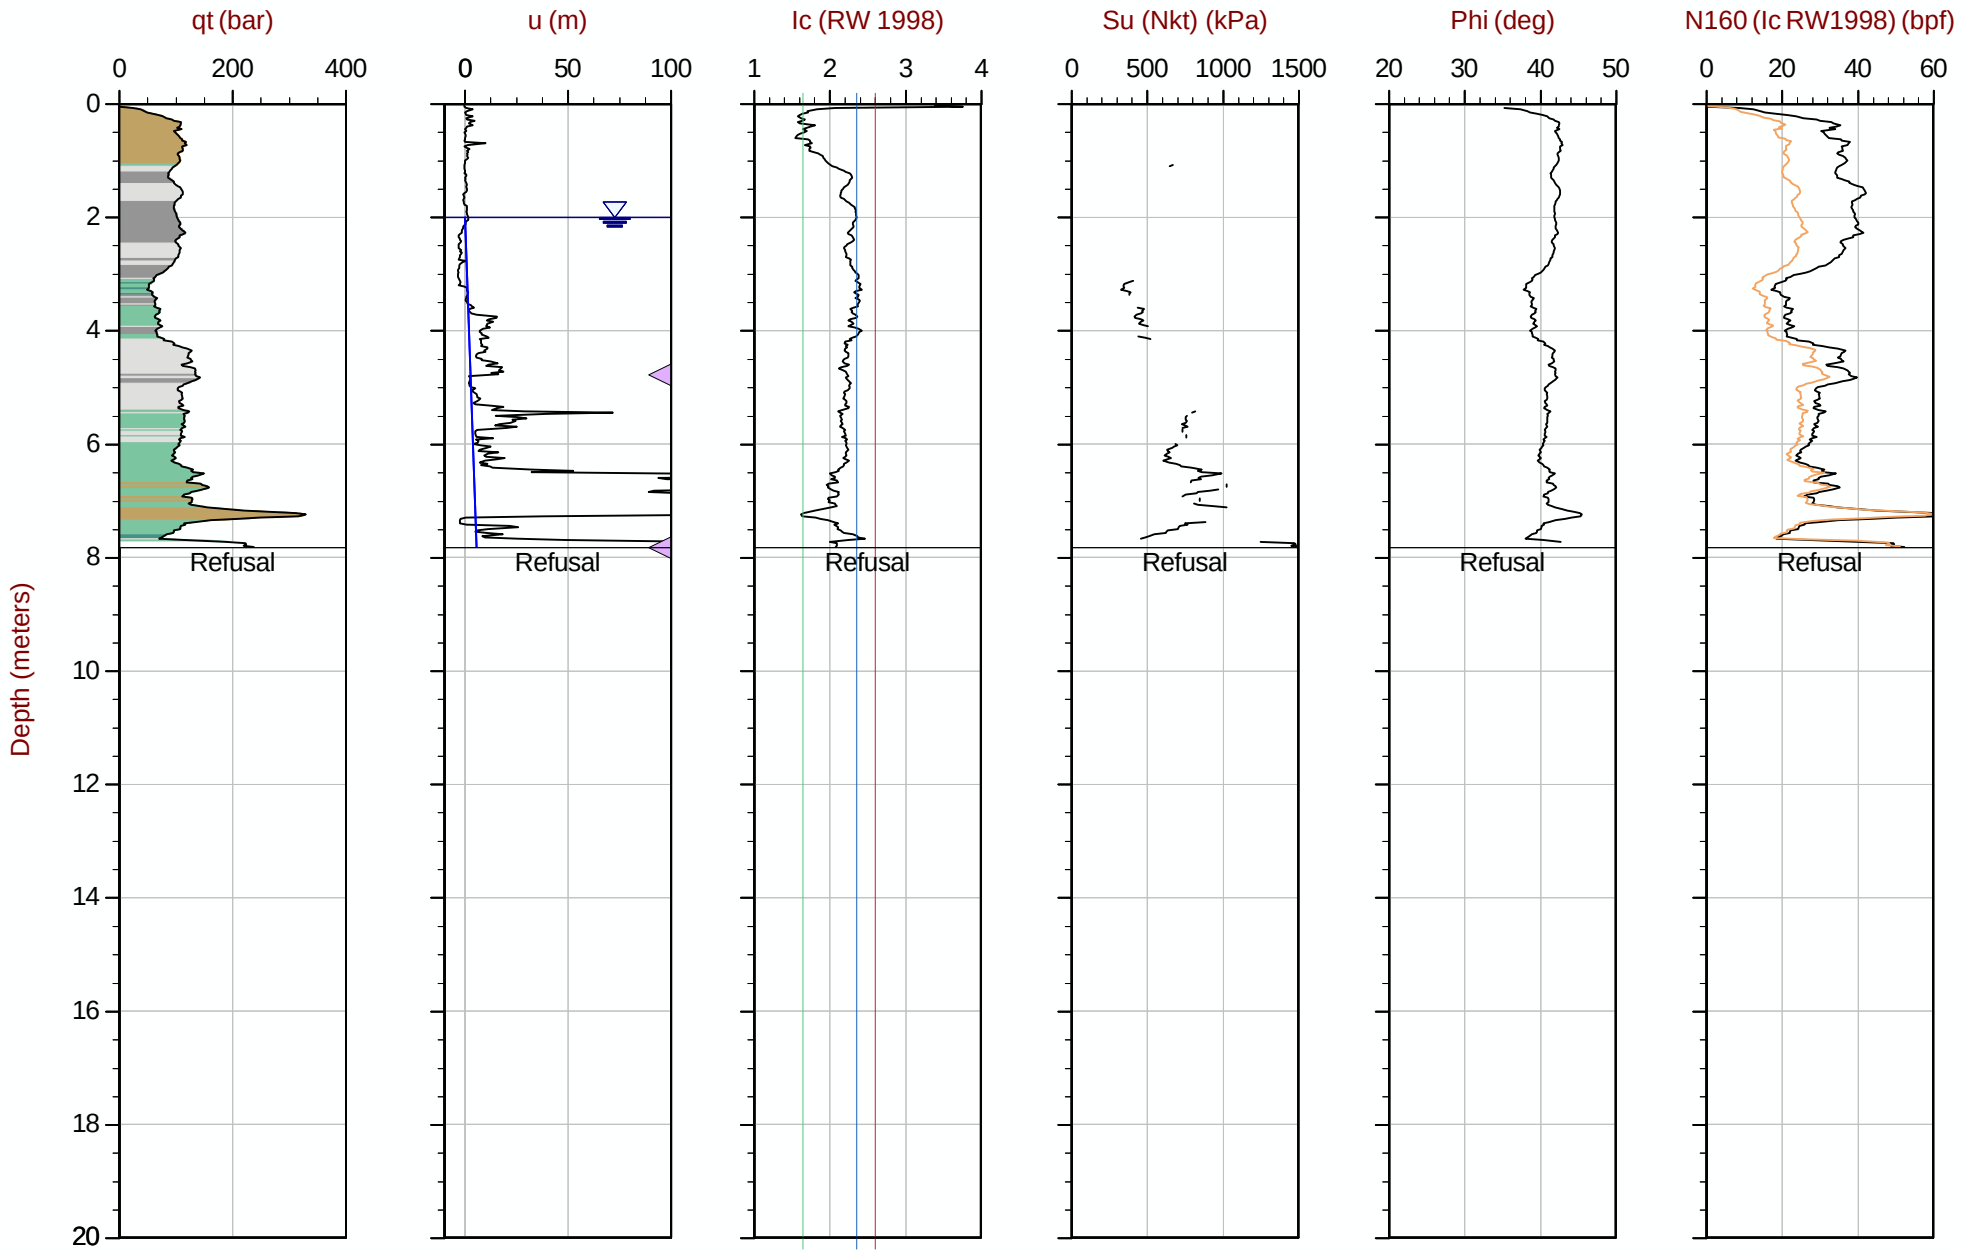

Max Depth: 7.825 m / 25.67 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT142.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612520m E: 416519m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 10:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT143
Cone: 854:T1500F15U35 Area= 15cm2

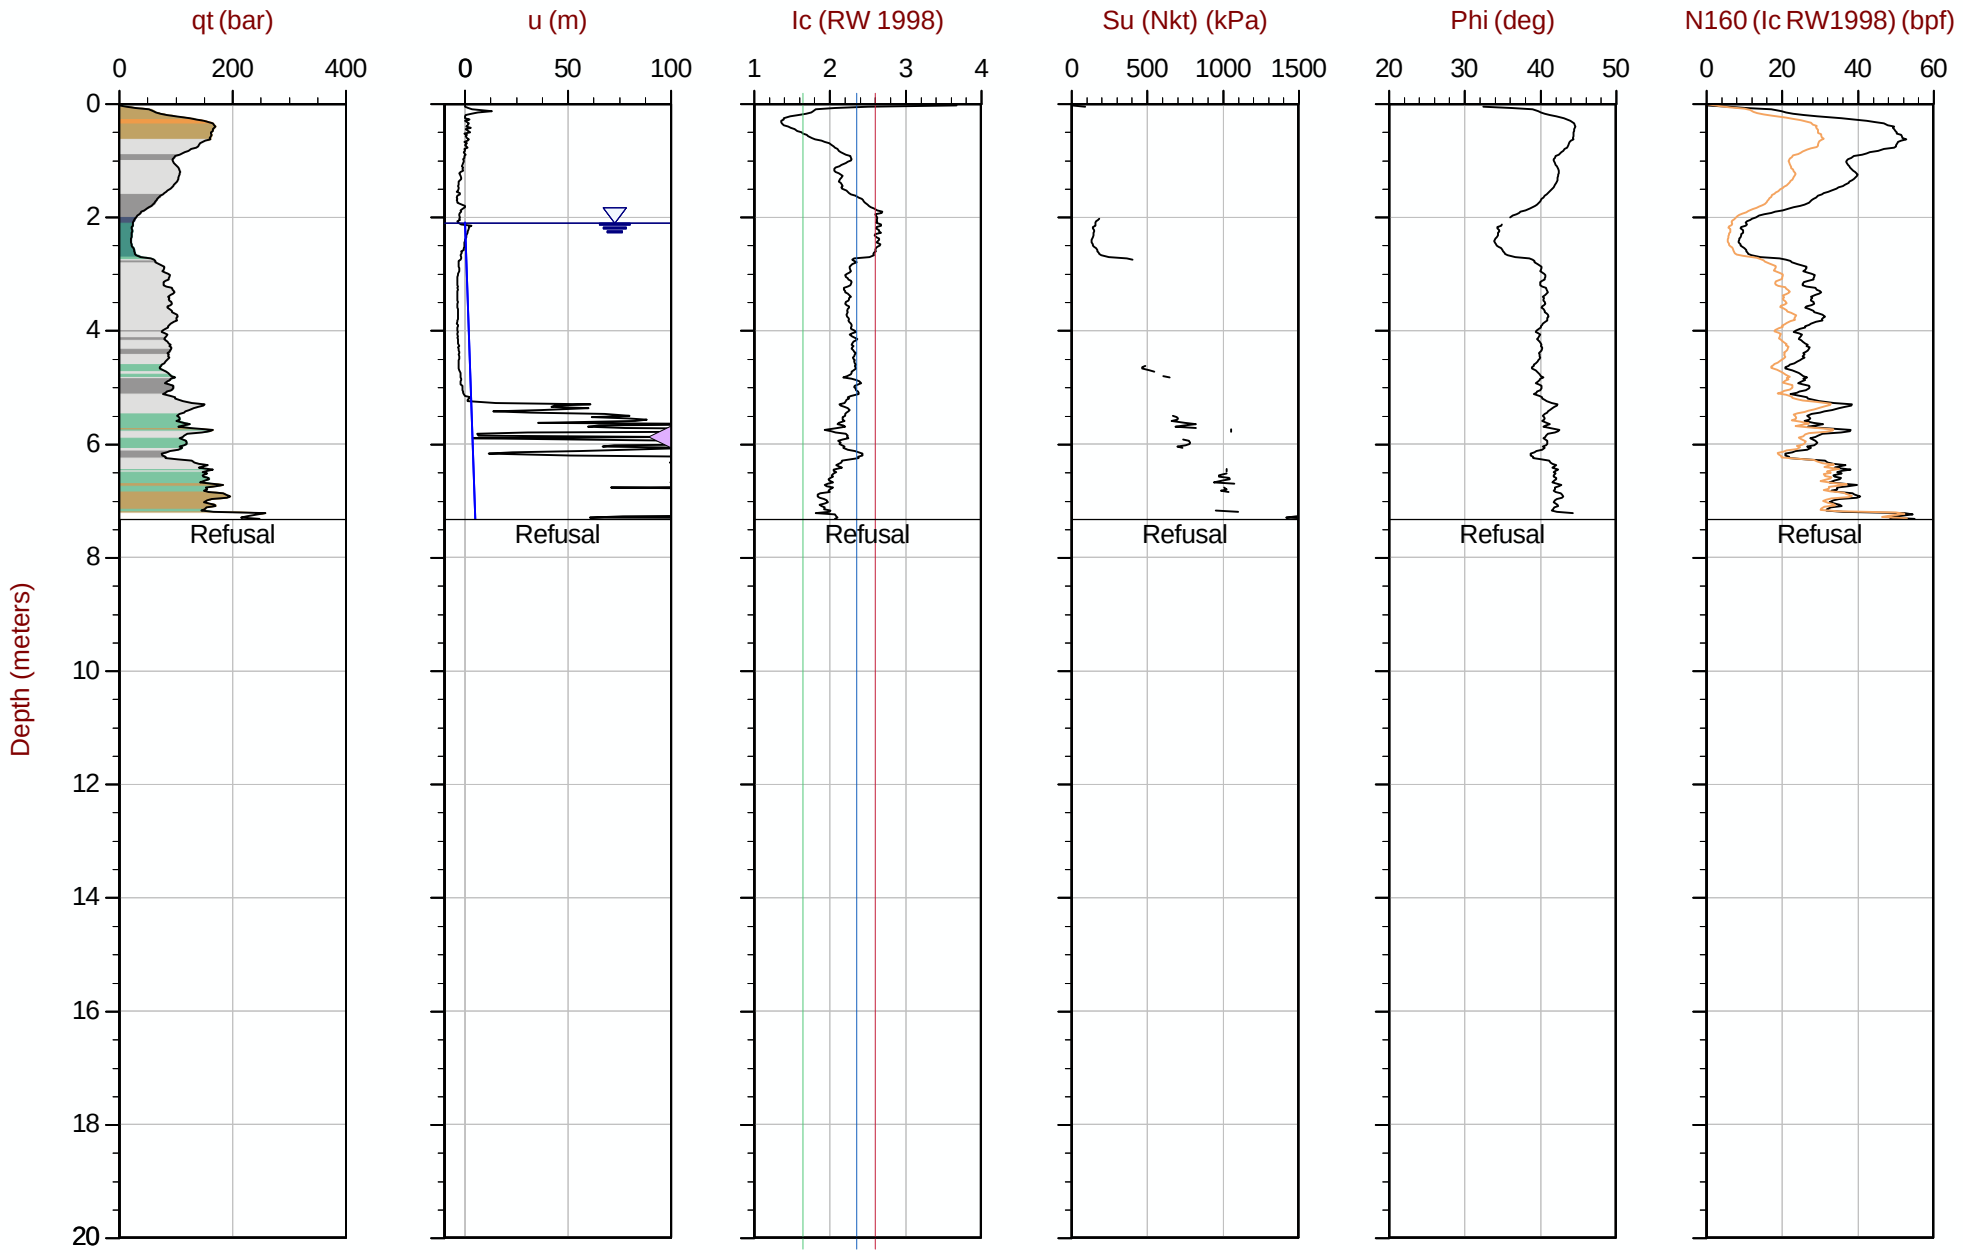

Max Depth: 7.325 m / 24.03 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT143.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612519m E: 416570m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 12:47
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT144
Cone: 854:T1500F15U35 Area= 15cm2

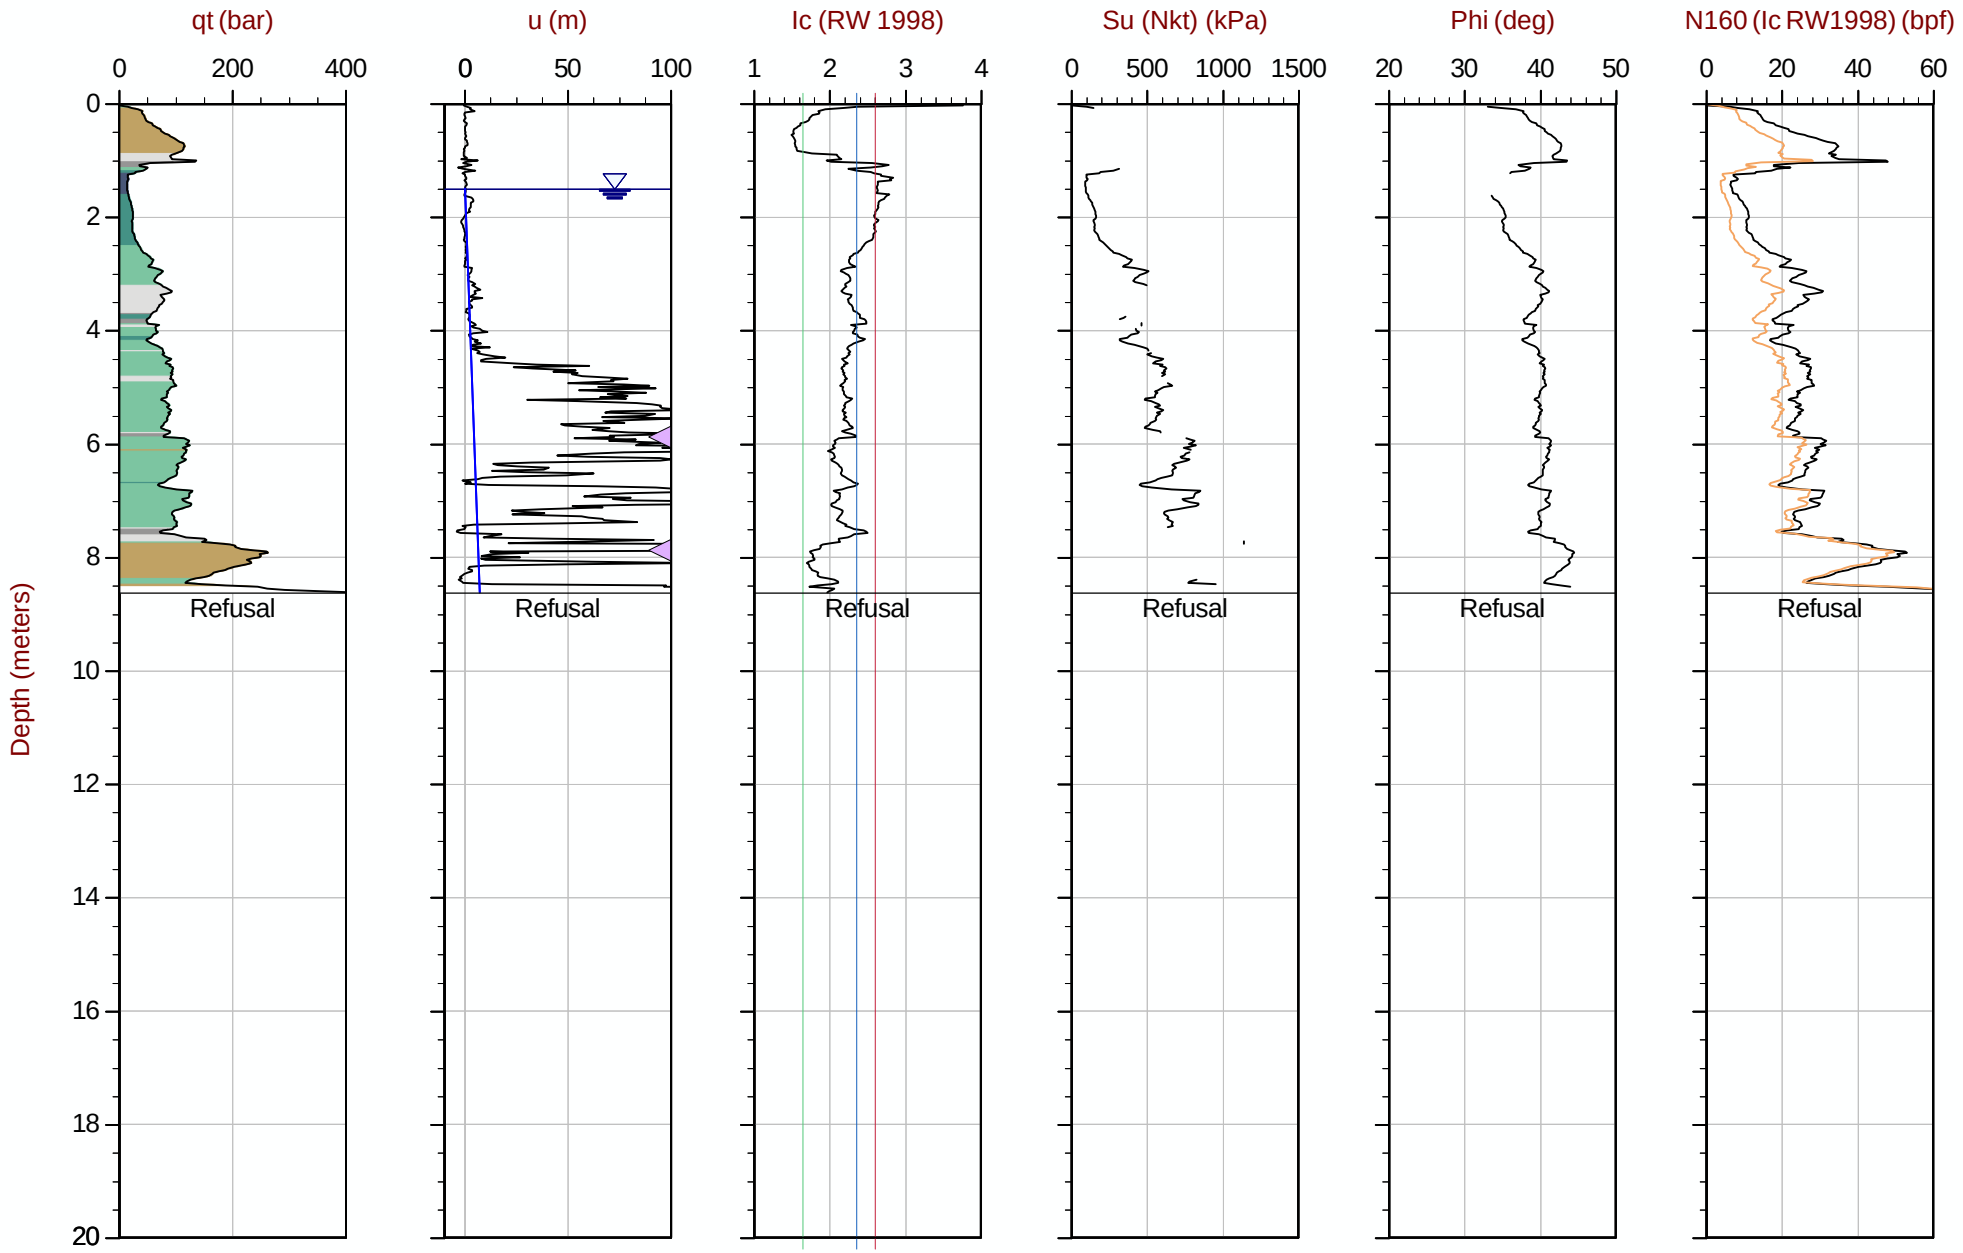

Max Depth: 8.625 m / 28.30 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT144.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612516m E: 416627m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 13:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT145
Cone: 854:T1500F15U35 Area= 15cm2

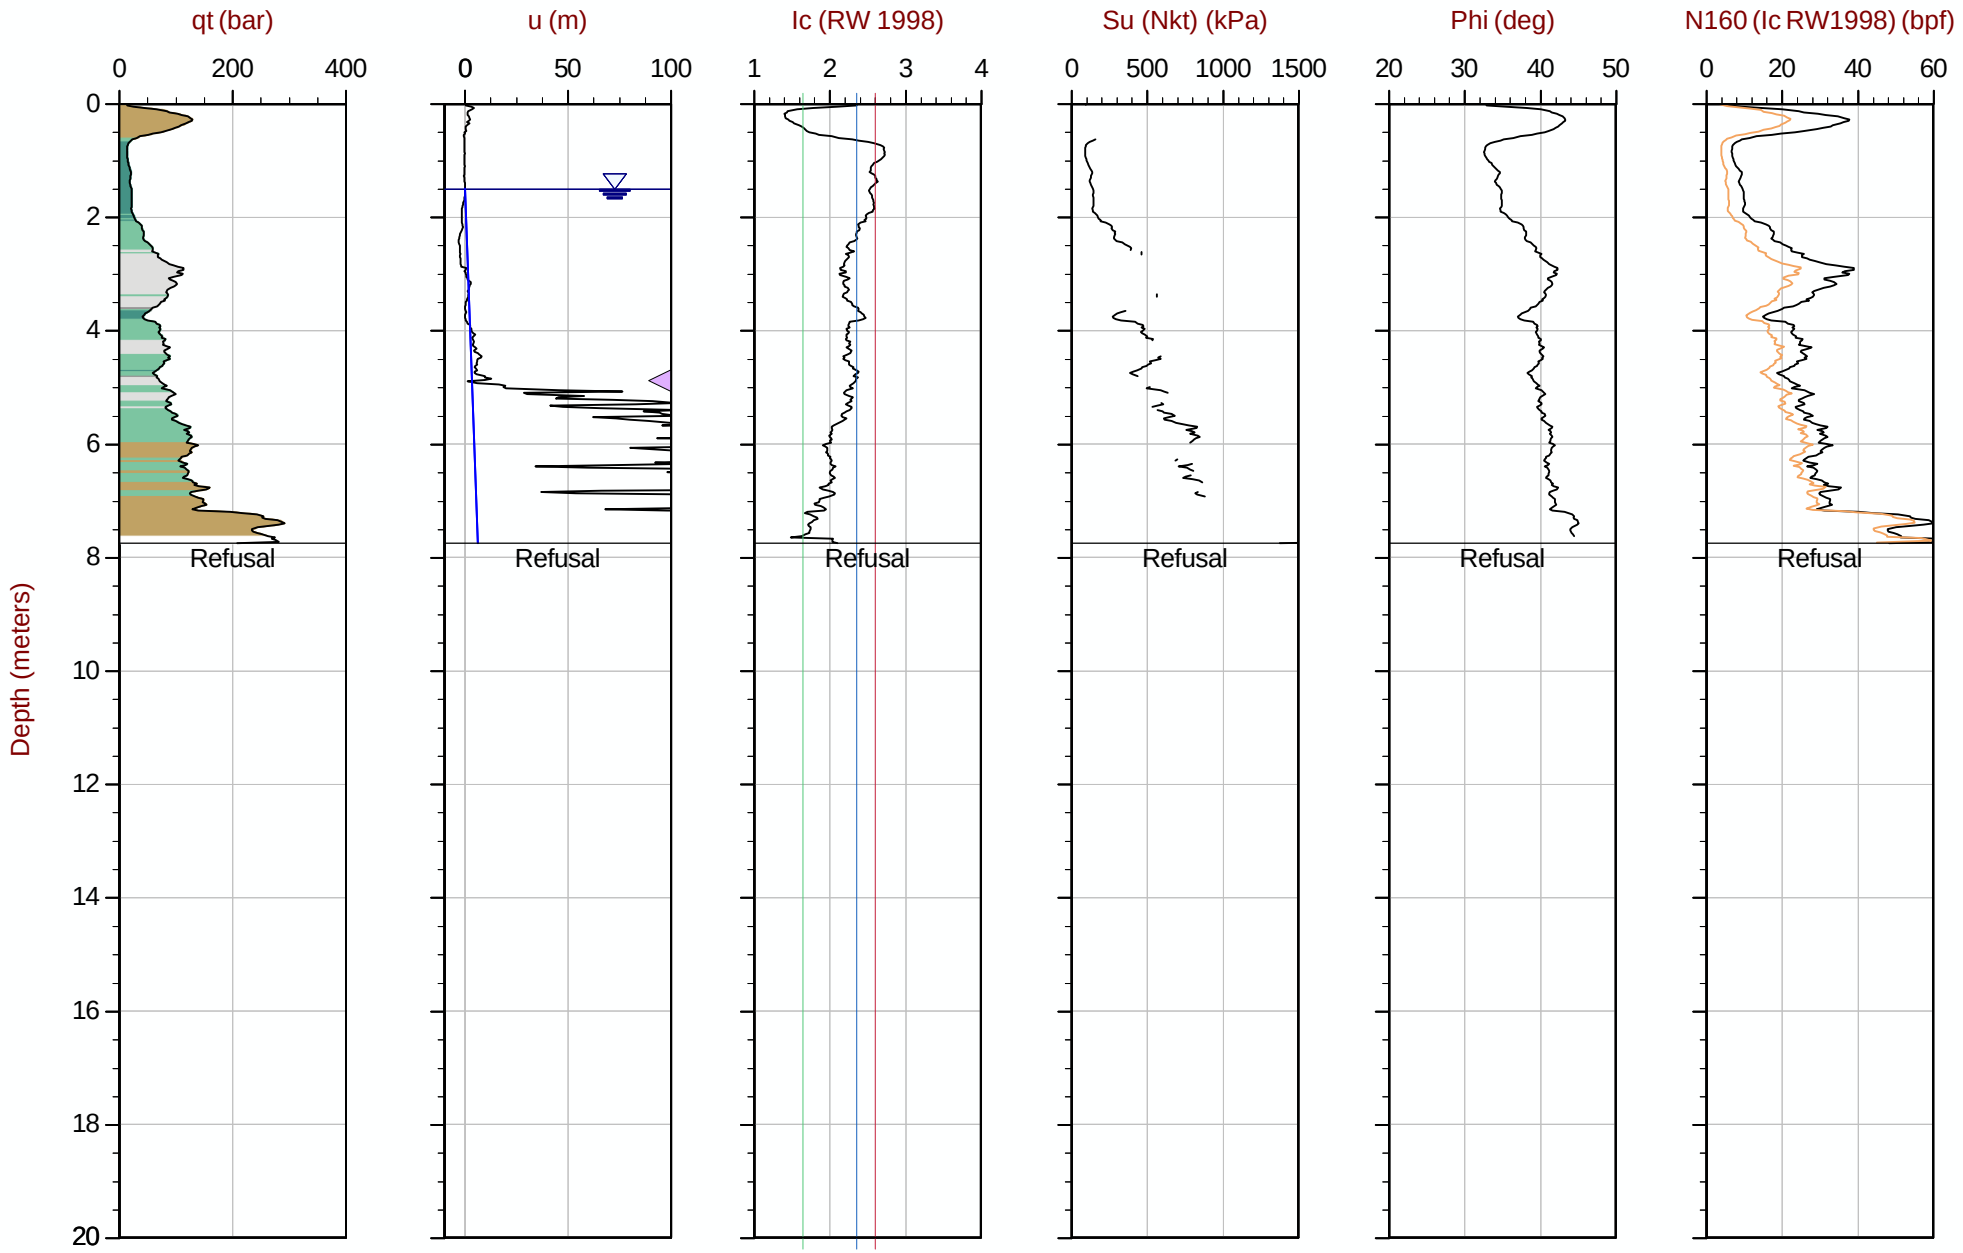

Max Depth: 7.750 m / 25.43 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT145.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612505m E: 416674m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 07:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT146
Cone: 651:T1500F15U35 Area= 15cm2

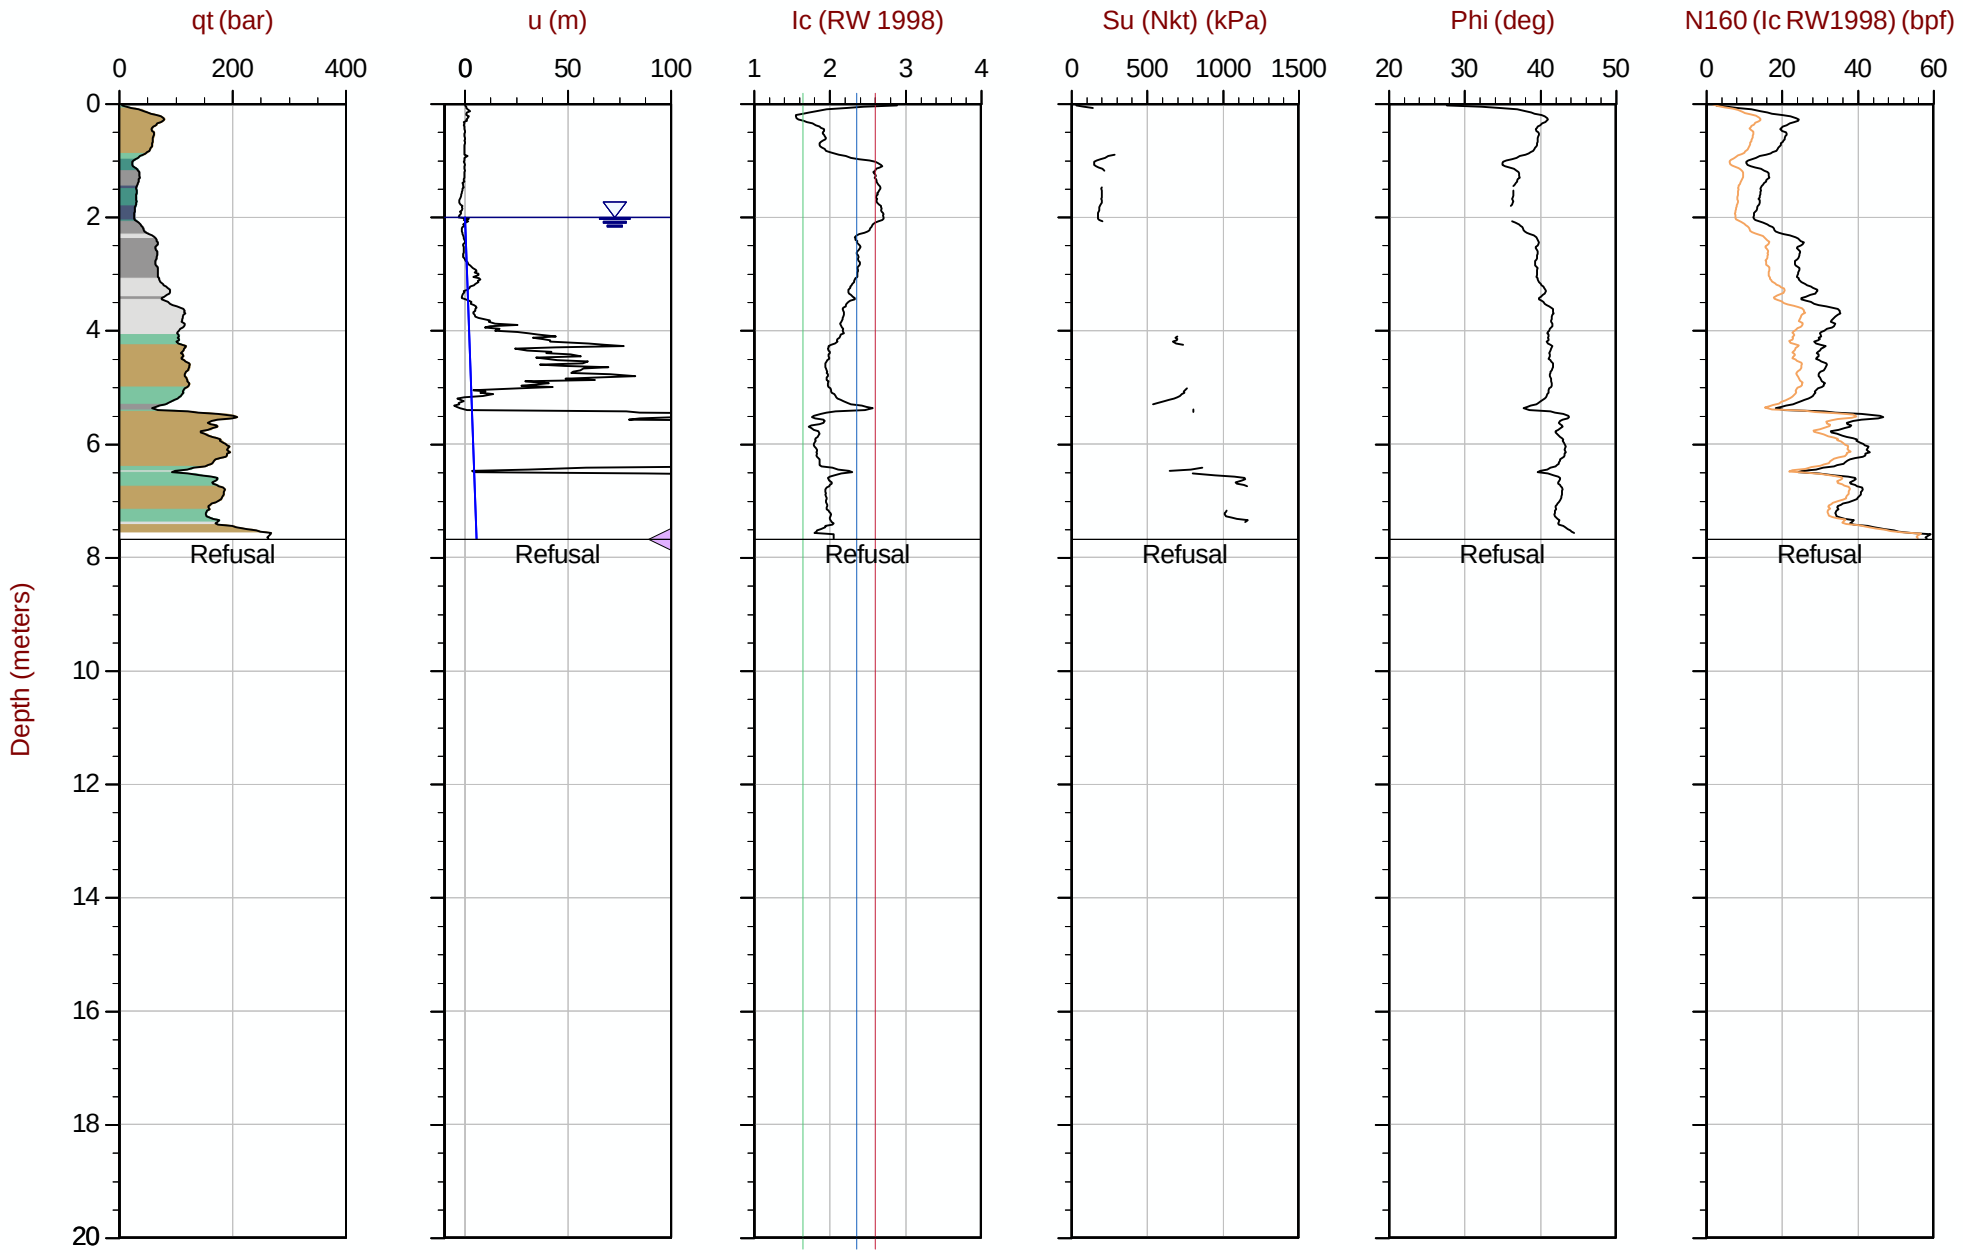

Max Depth: 7.675 m / 25.18 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT146.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612615m E: 414209m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 10:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT147
Cone: 651:T1500F15U35 Area= 15cm2

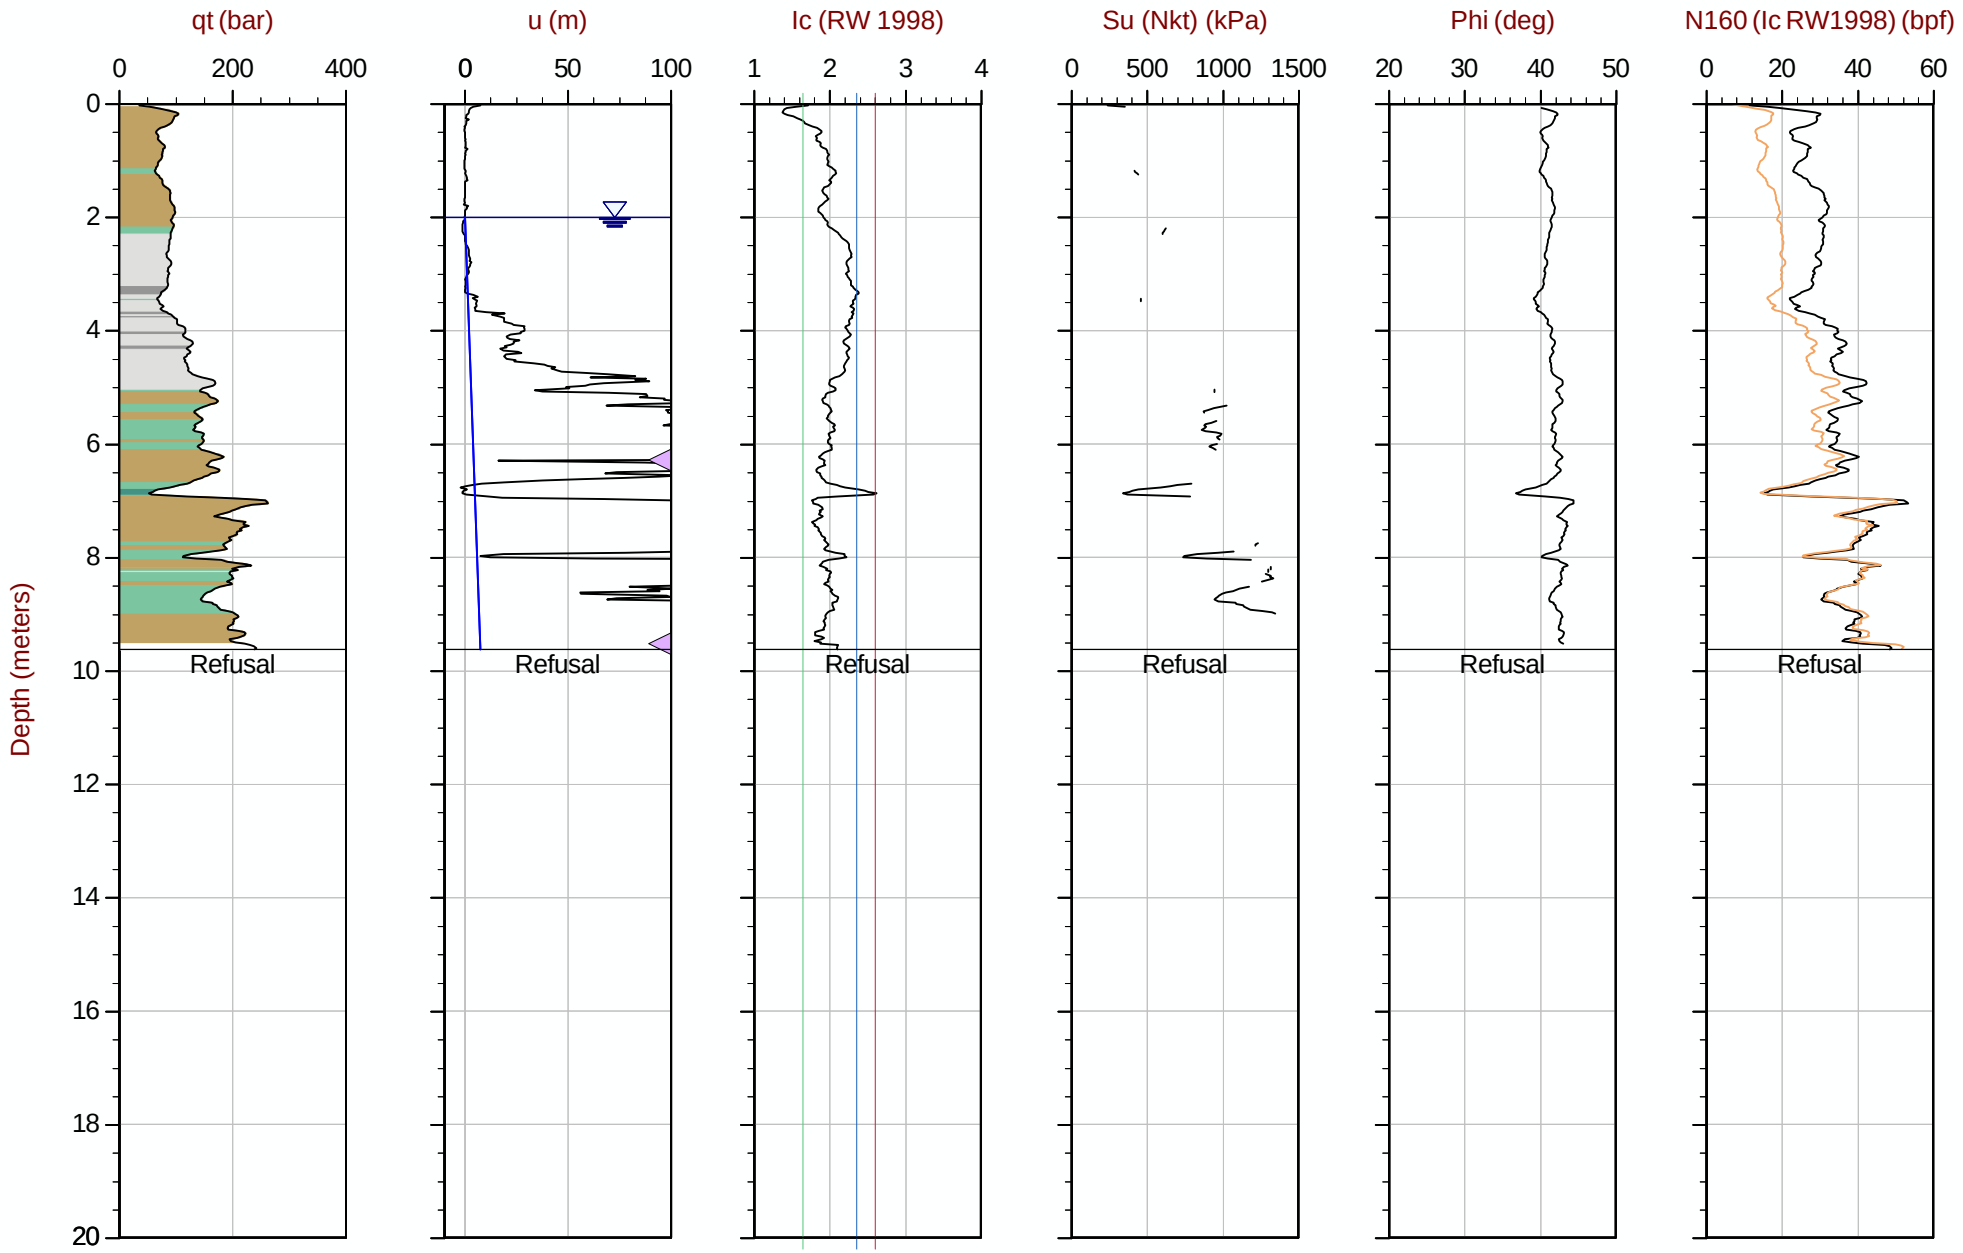

Max Depth: 9.625 m / 31.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT147.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612613m E: 414309m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 15:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT148
Cone: 750:T1500F15U35 Area= 15cm2

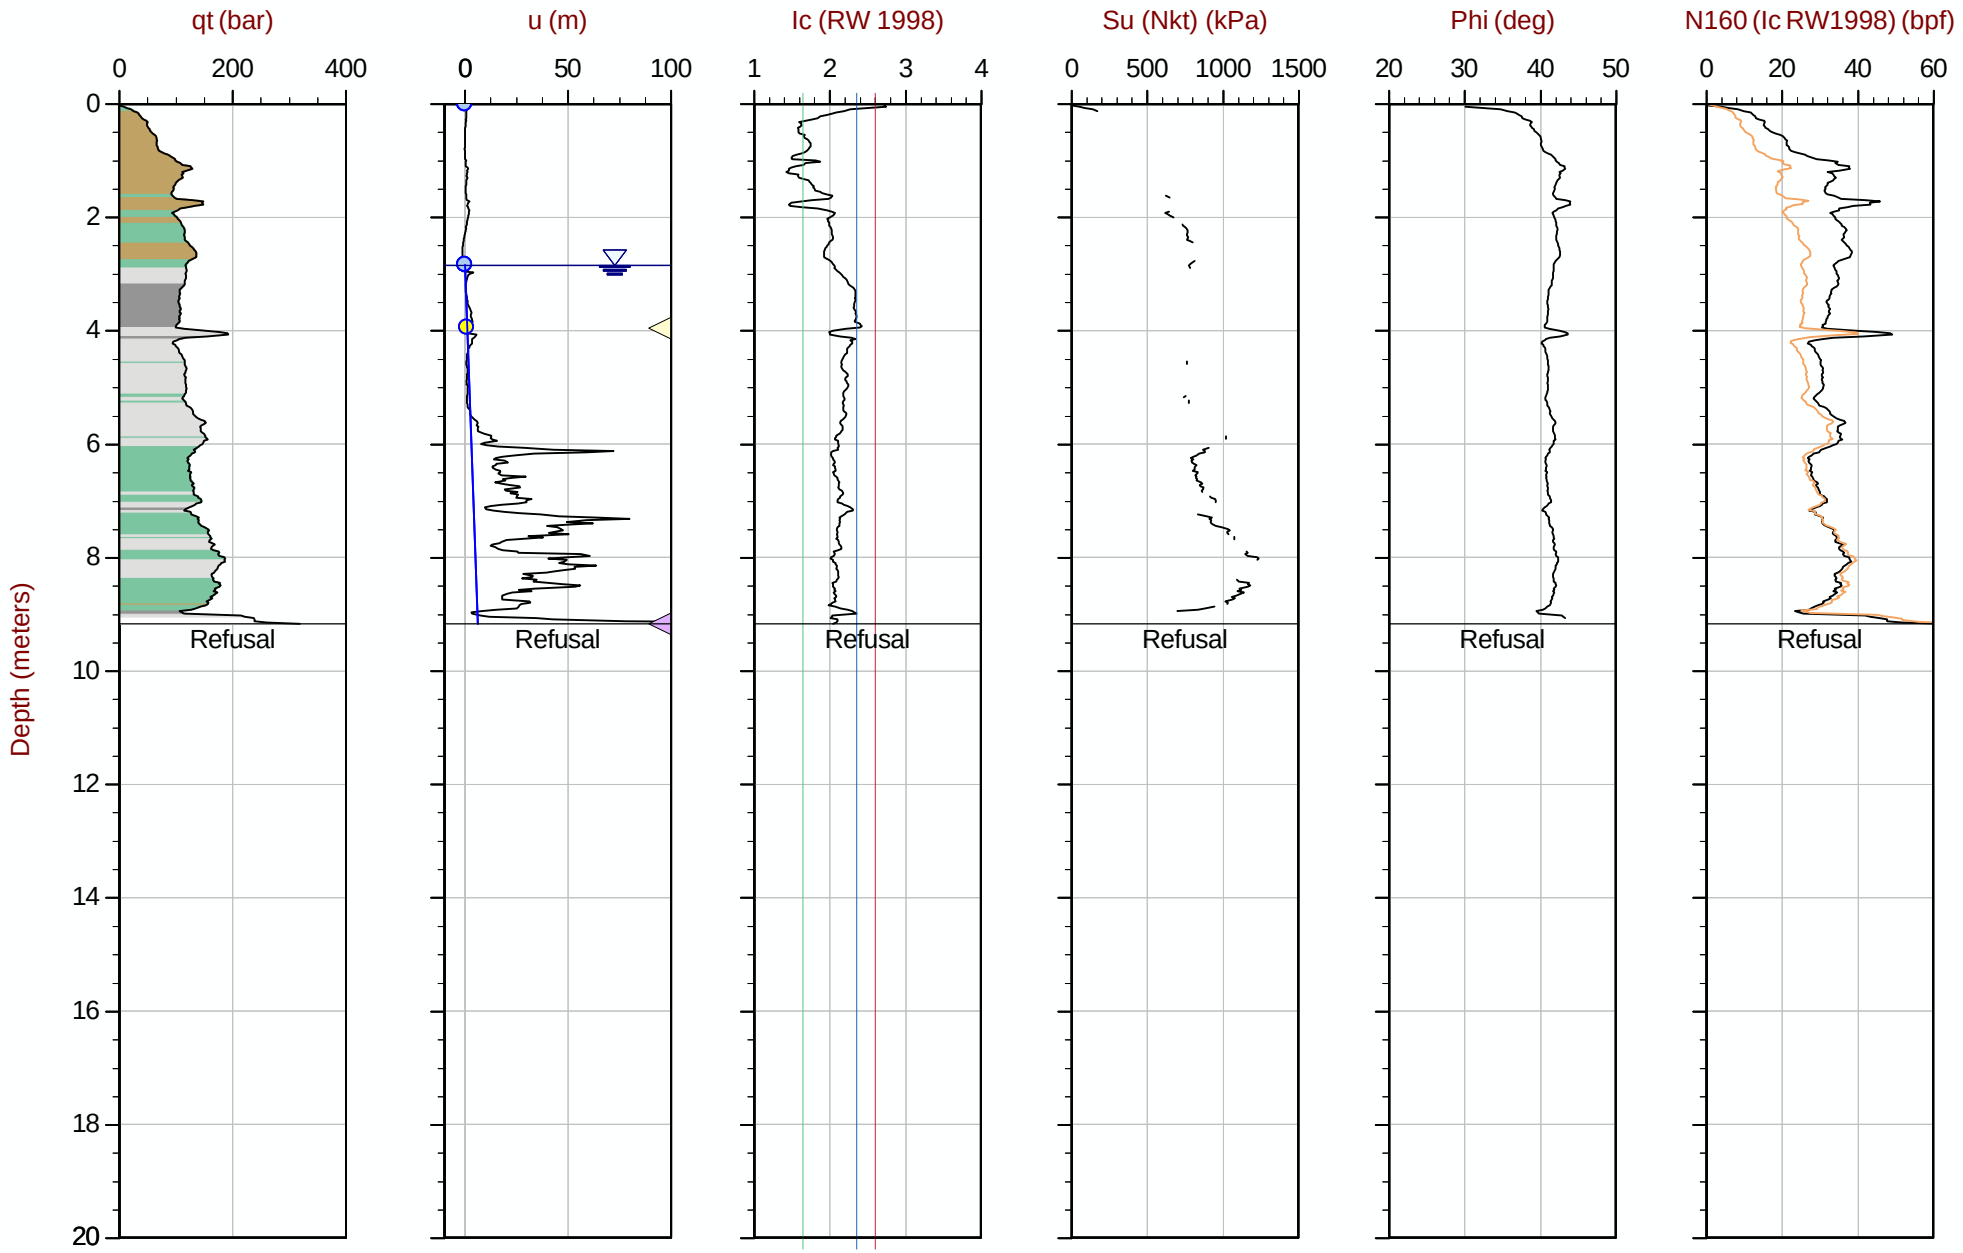

Max Depth: 9.175 m / 30.10 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT148.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612609m E: 414409m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 09:48
Site: Brooks, Alberta

Sounding: RCPT22-22CPT149
Cone: 750:T1500F15U35 Area= 15cm2

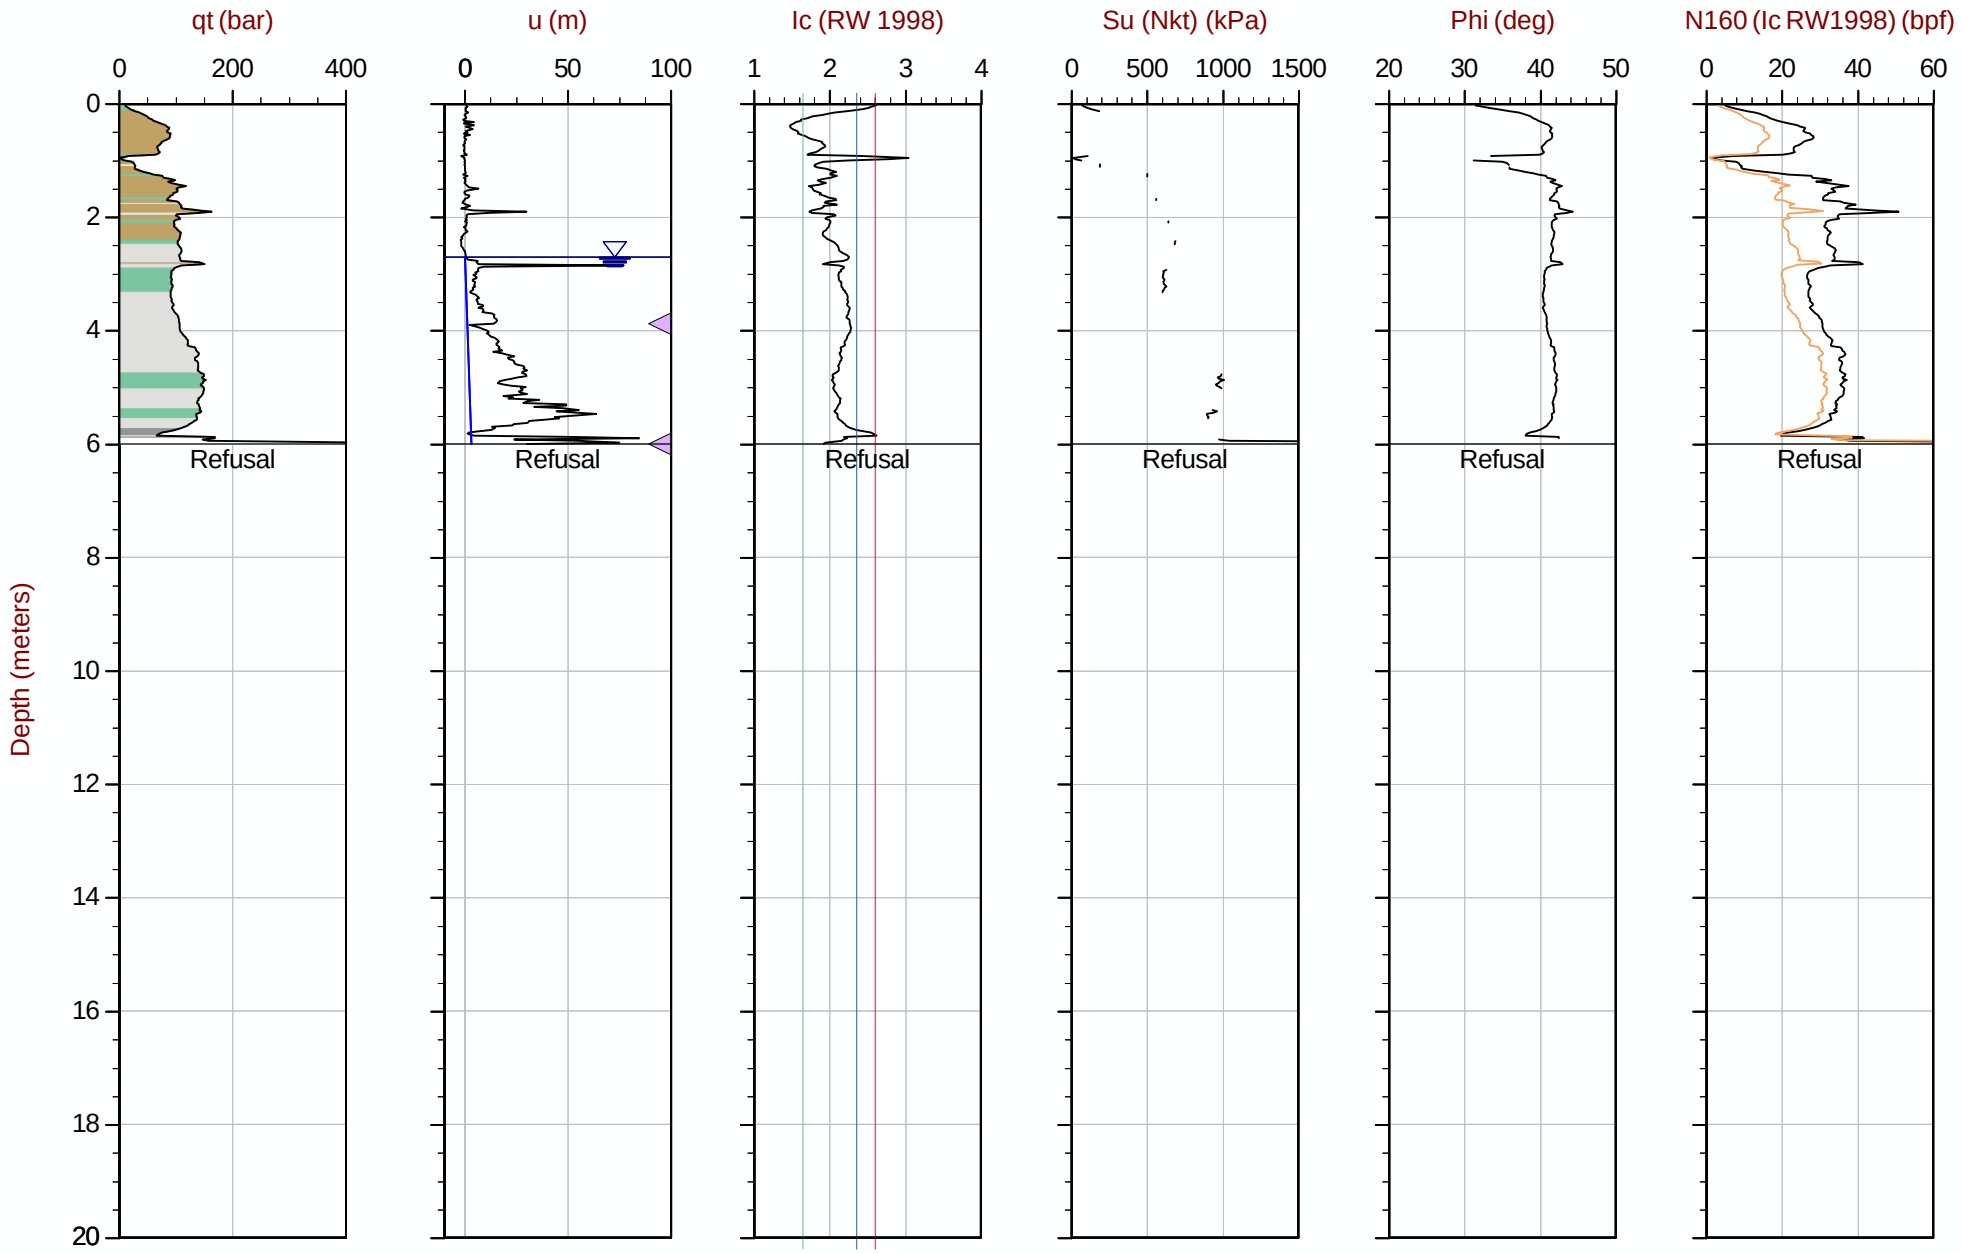

Max Depth: 6.000 m / 19.68 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT149.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612607m E: 414509m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 07:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT150
Cone: 750:T1500F15U35 Area= 15cm2

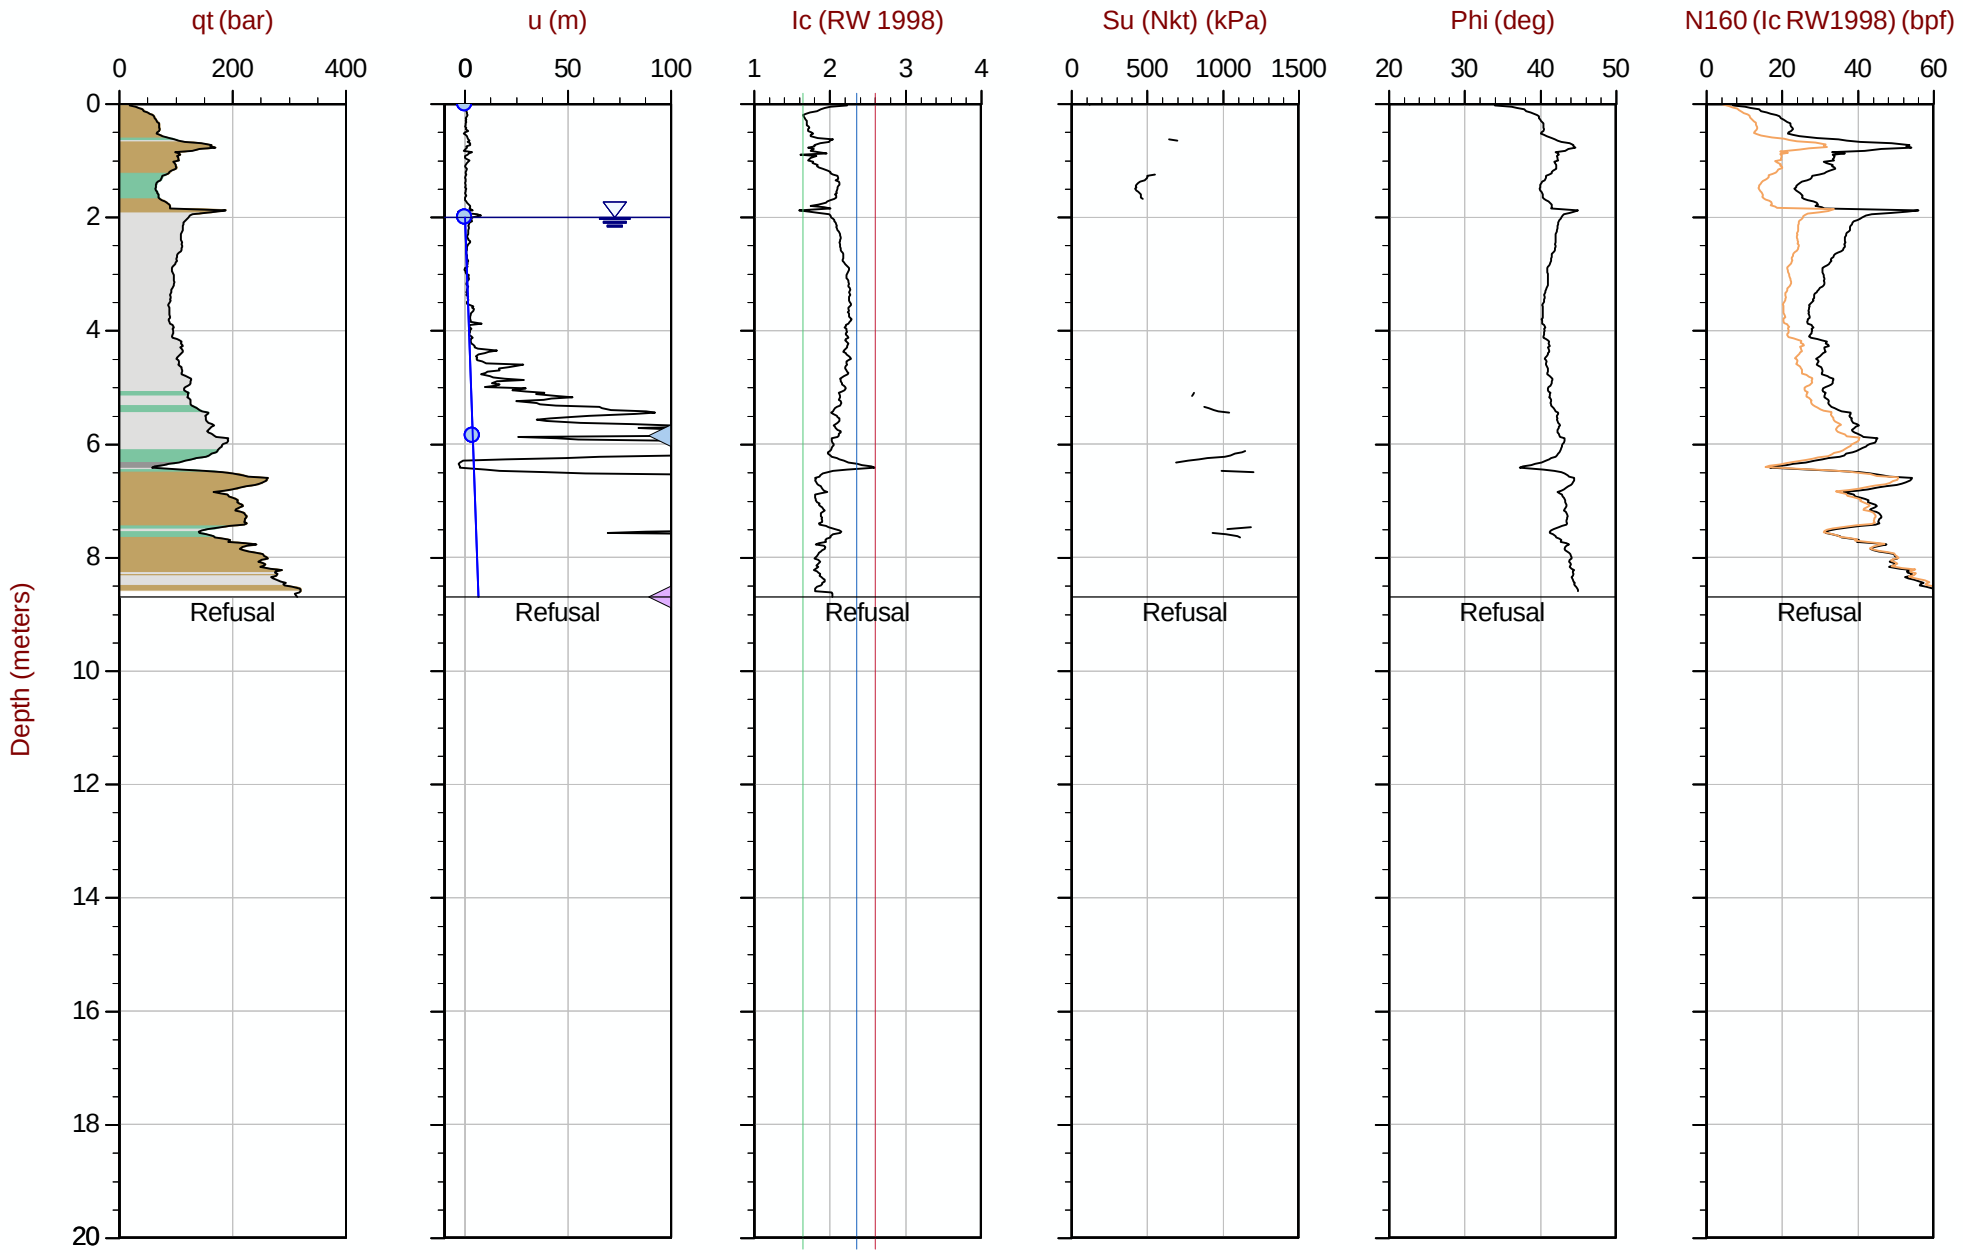

Max Depth: 8.700 m / 28.54 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT150.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612610m E: 414609m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 15:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT151
Cone: 750:T1500F15U35 Area= 15cm2

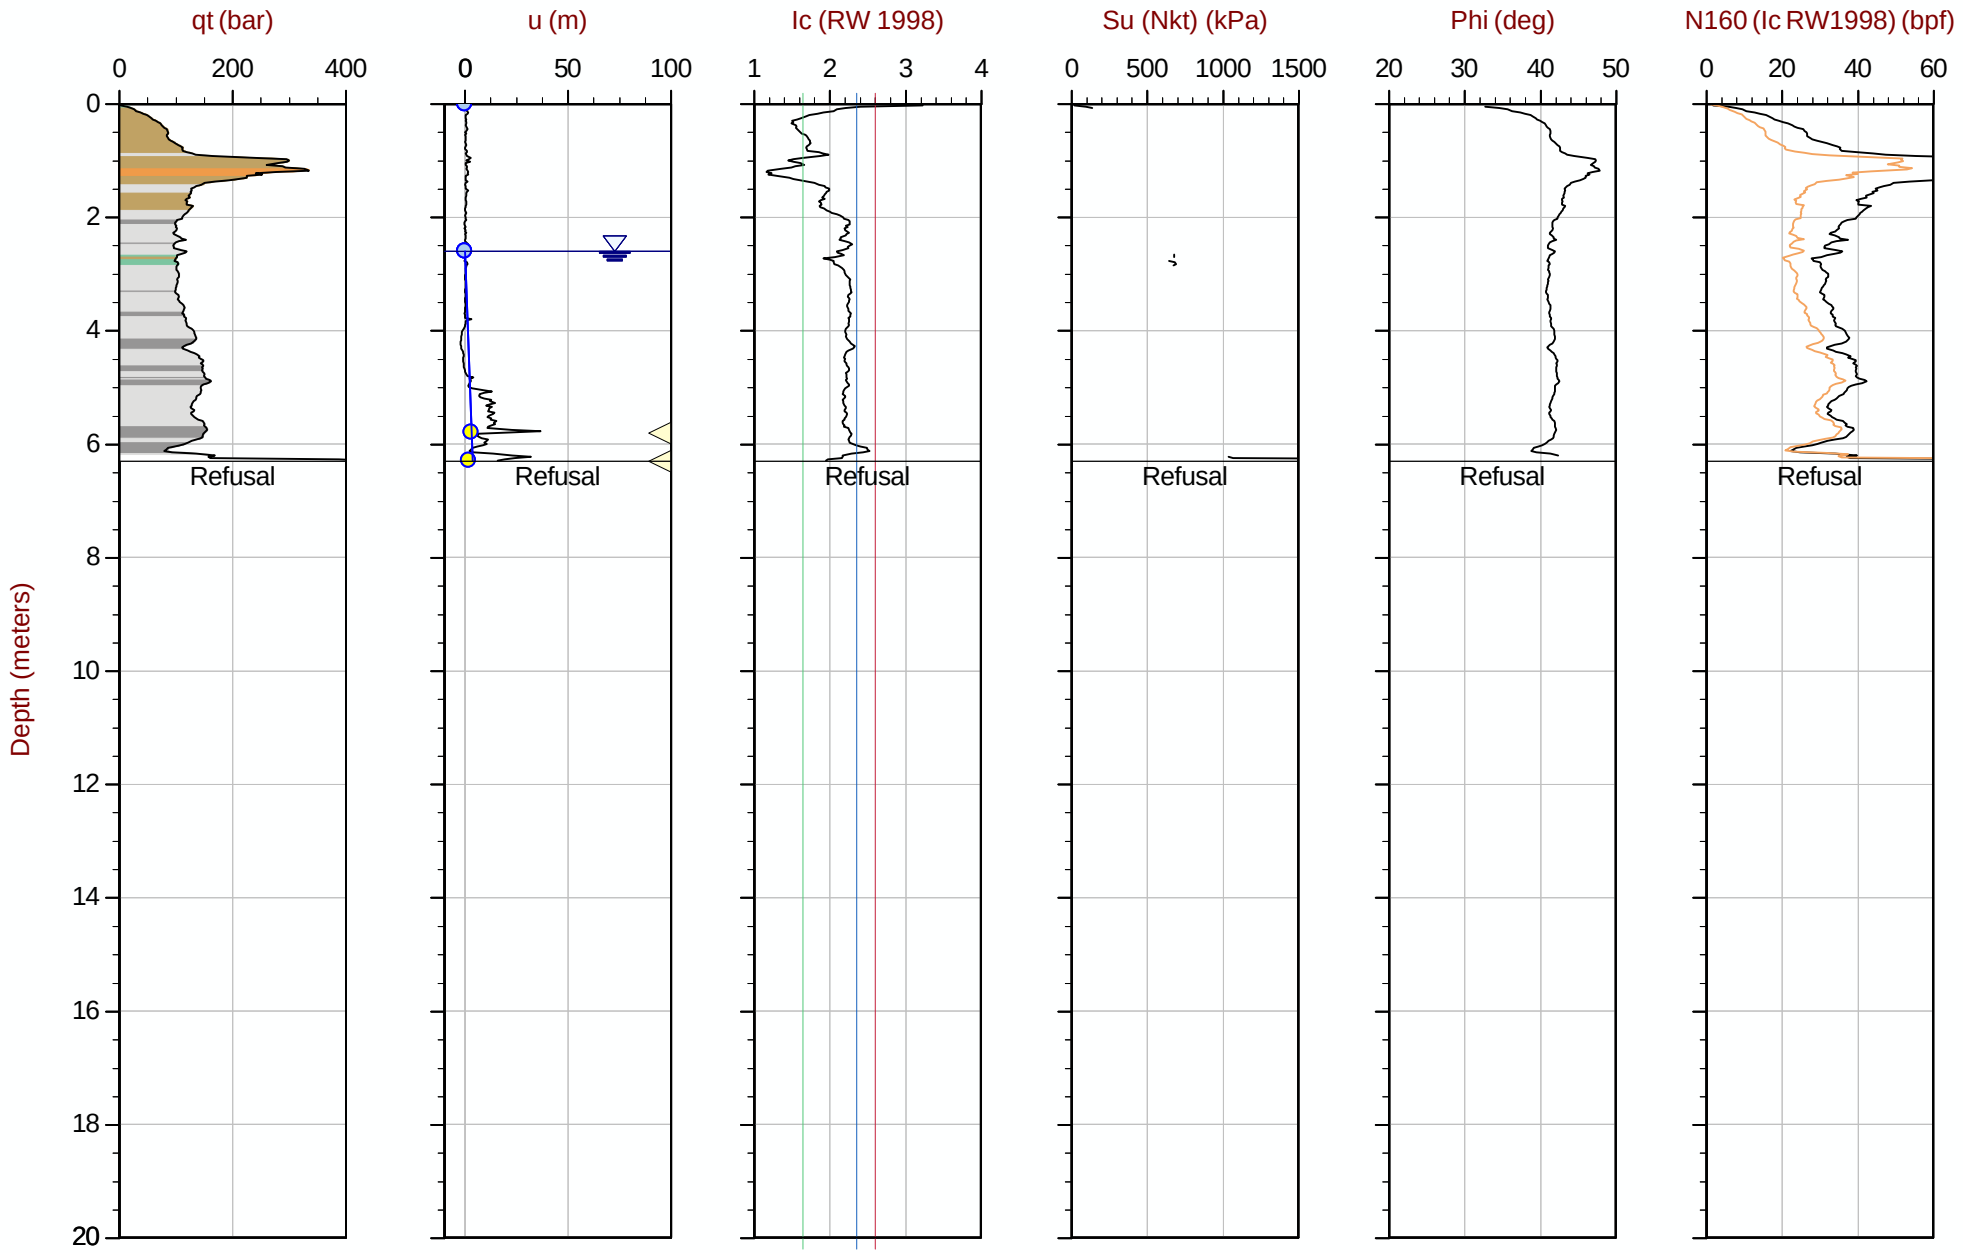

Max Depth: 6.300 m / 20.67 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT151.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612606m E: 414709m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 13:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT152
Cone: 750:T1500F15U35 Area= 15cm2

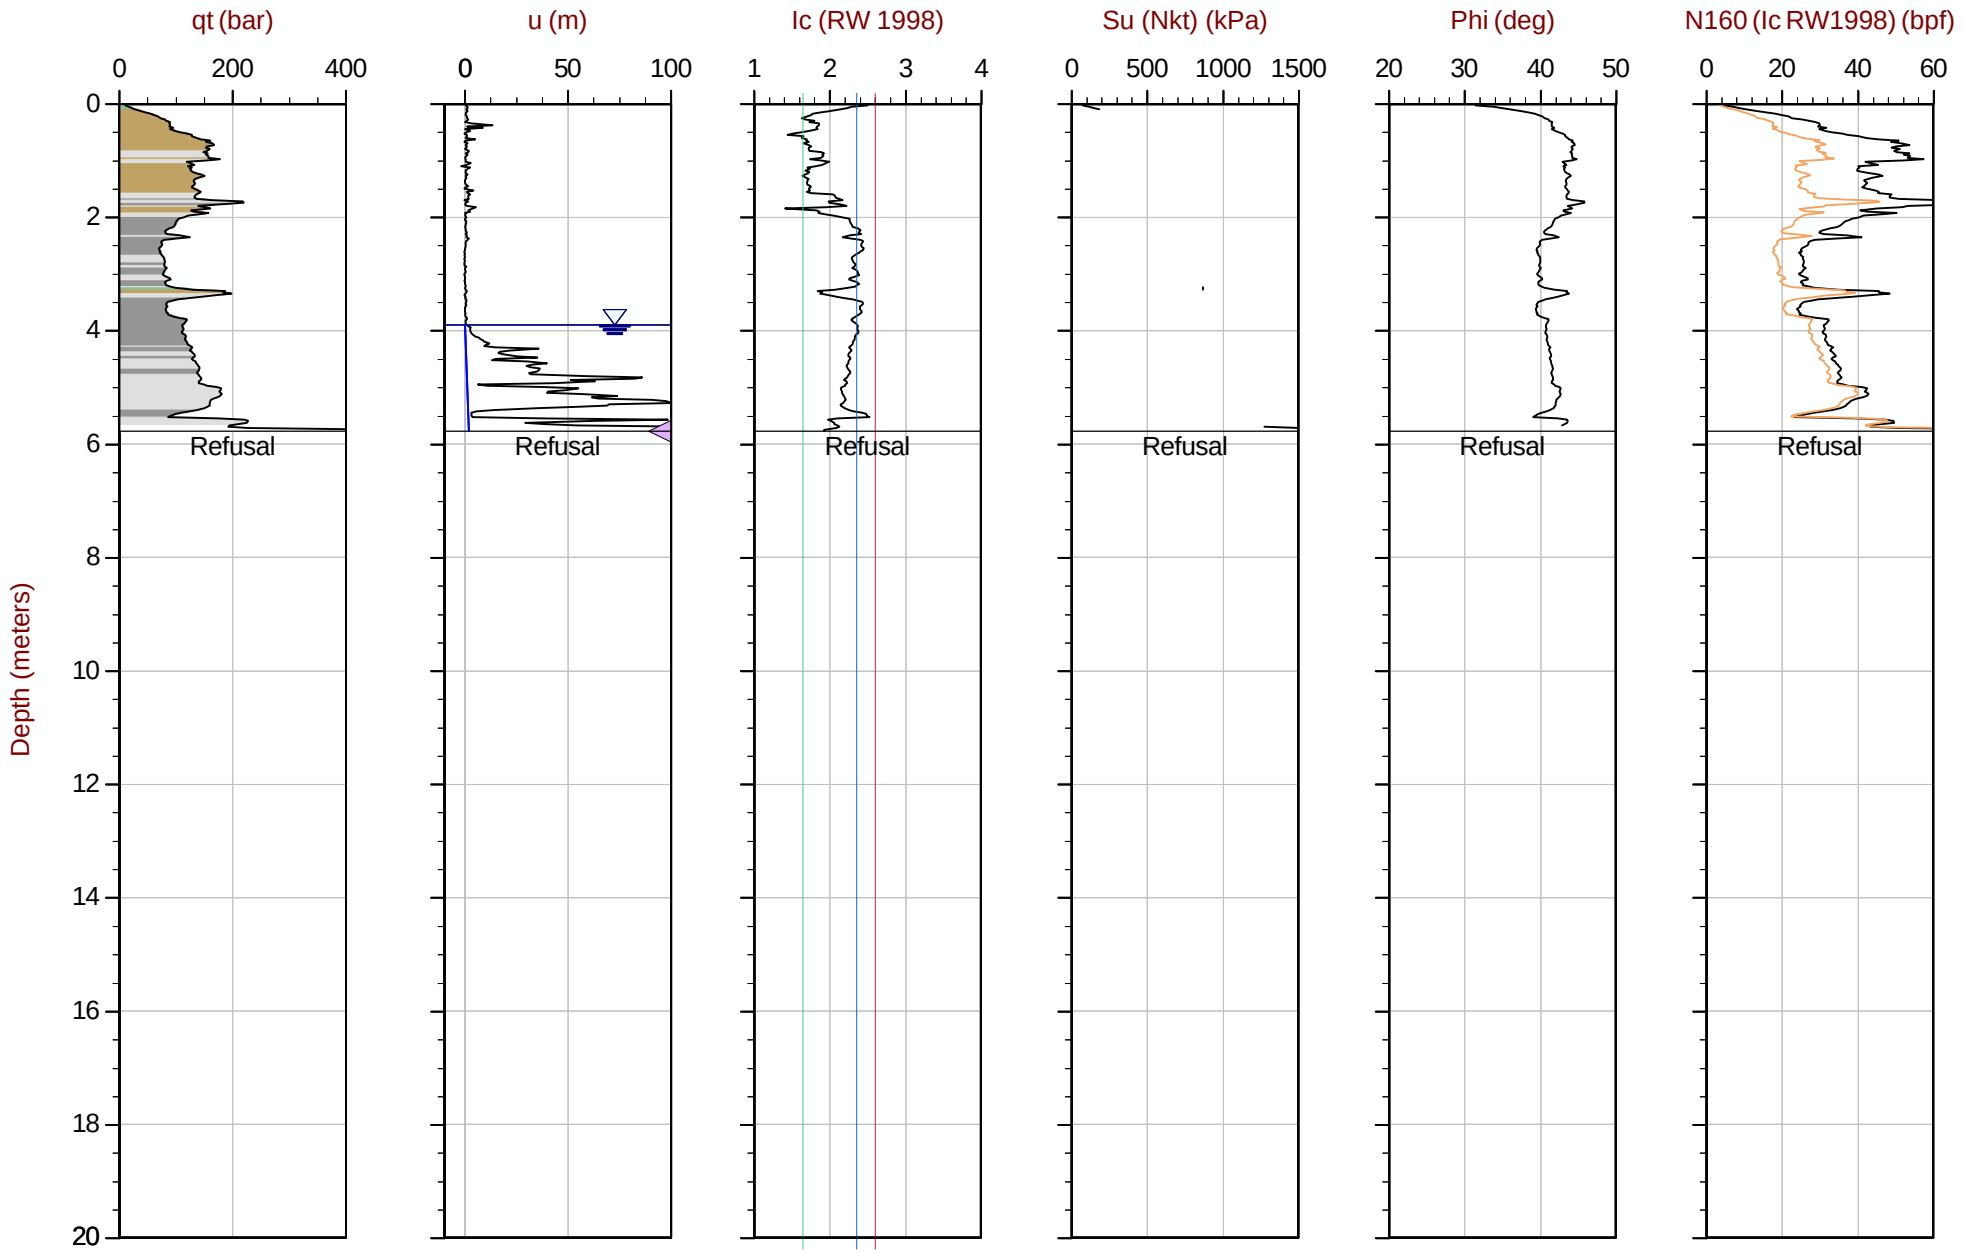

Max Depth: 5.775 m / 18.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT152.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612603m E: 414809m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 10:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT153
Cone: 750:T1500F15U35 Area= 15cm2

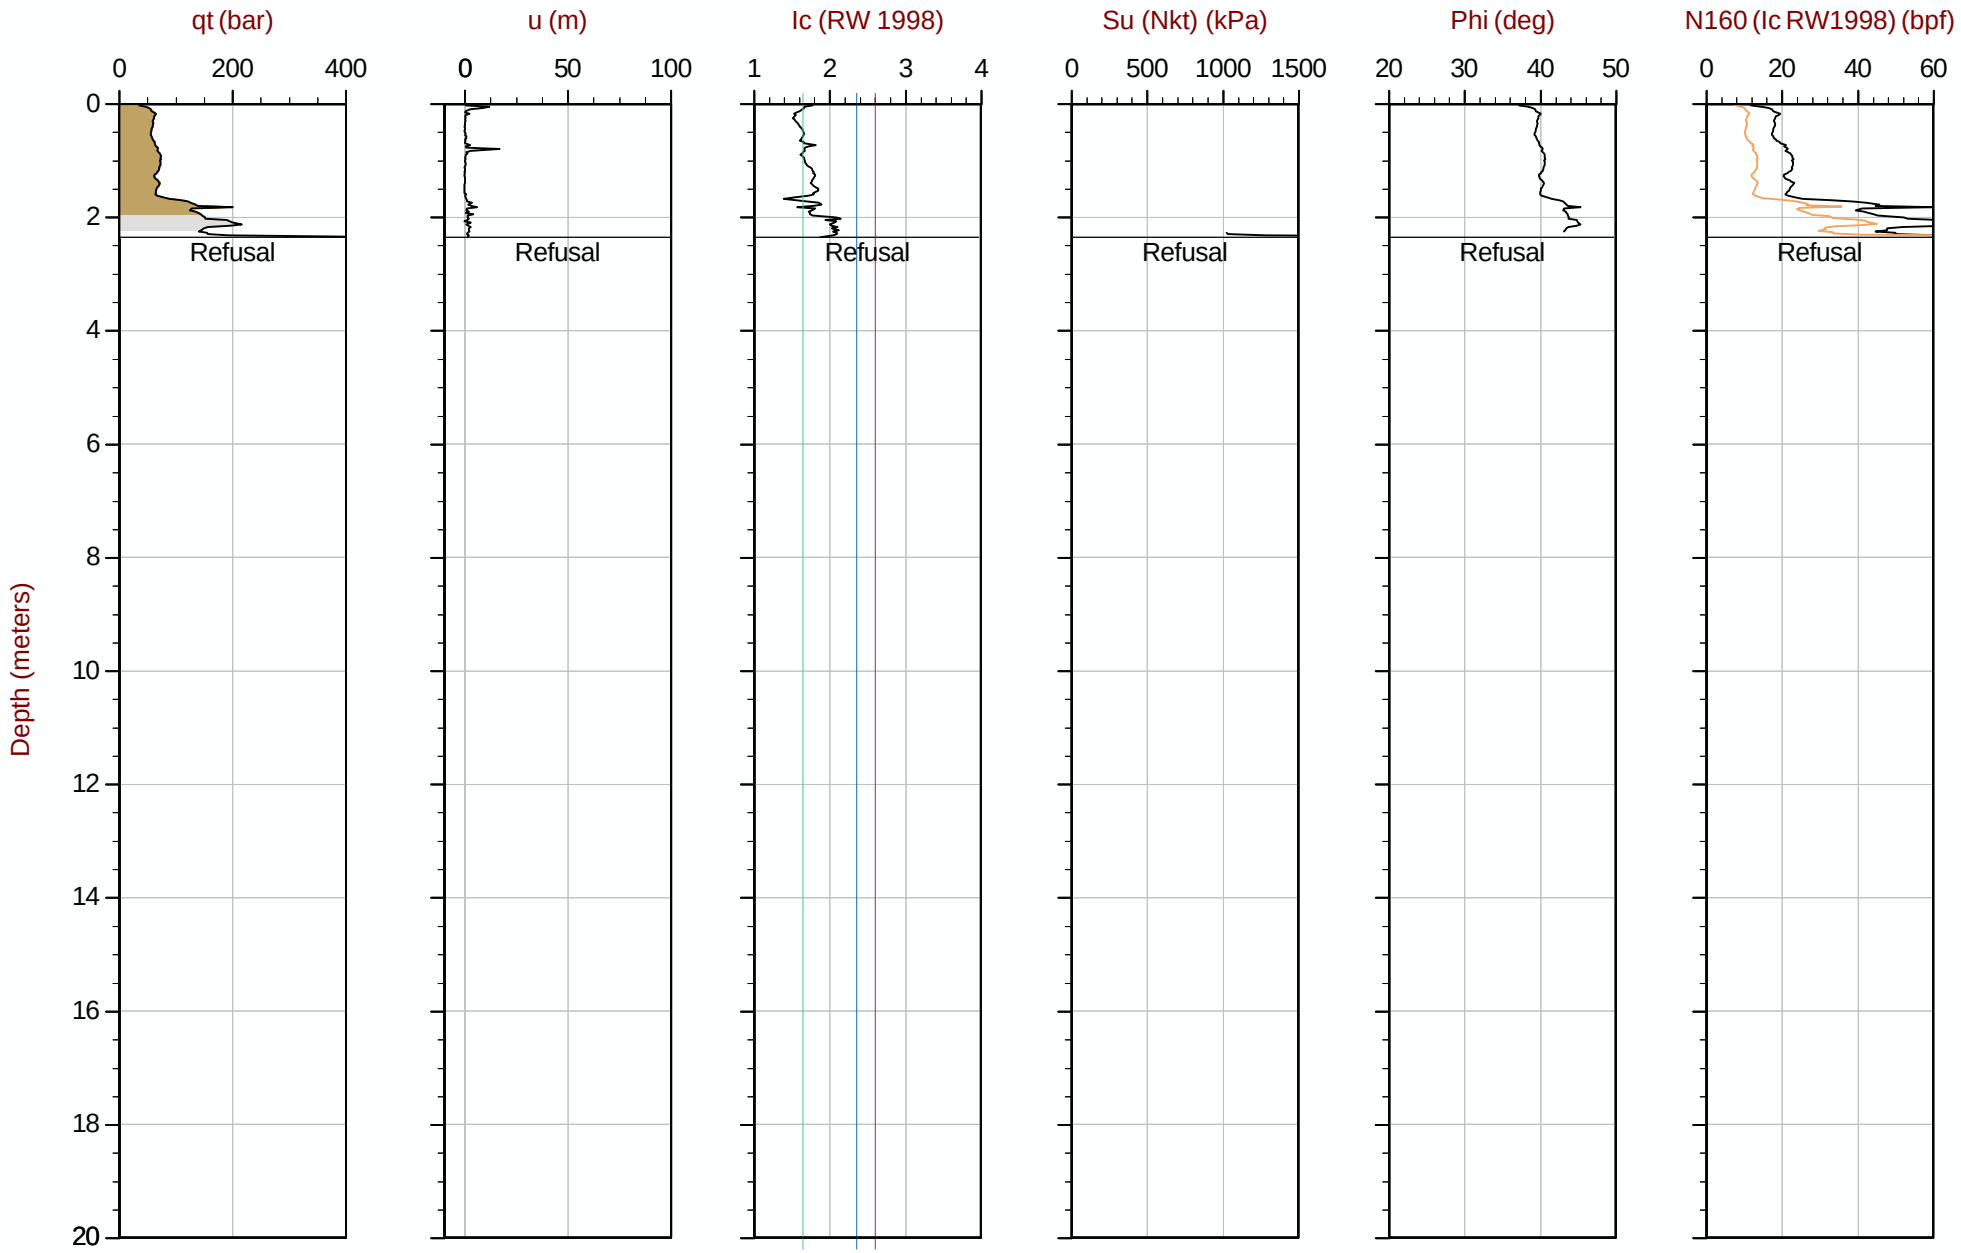

Max Depth: 2.350 m / 7.71 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT153.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612604m E: 414909m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 10:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT153A
Cone: 750:T1500F15U35 Area= 15cm2

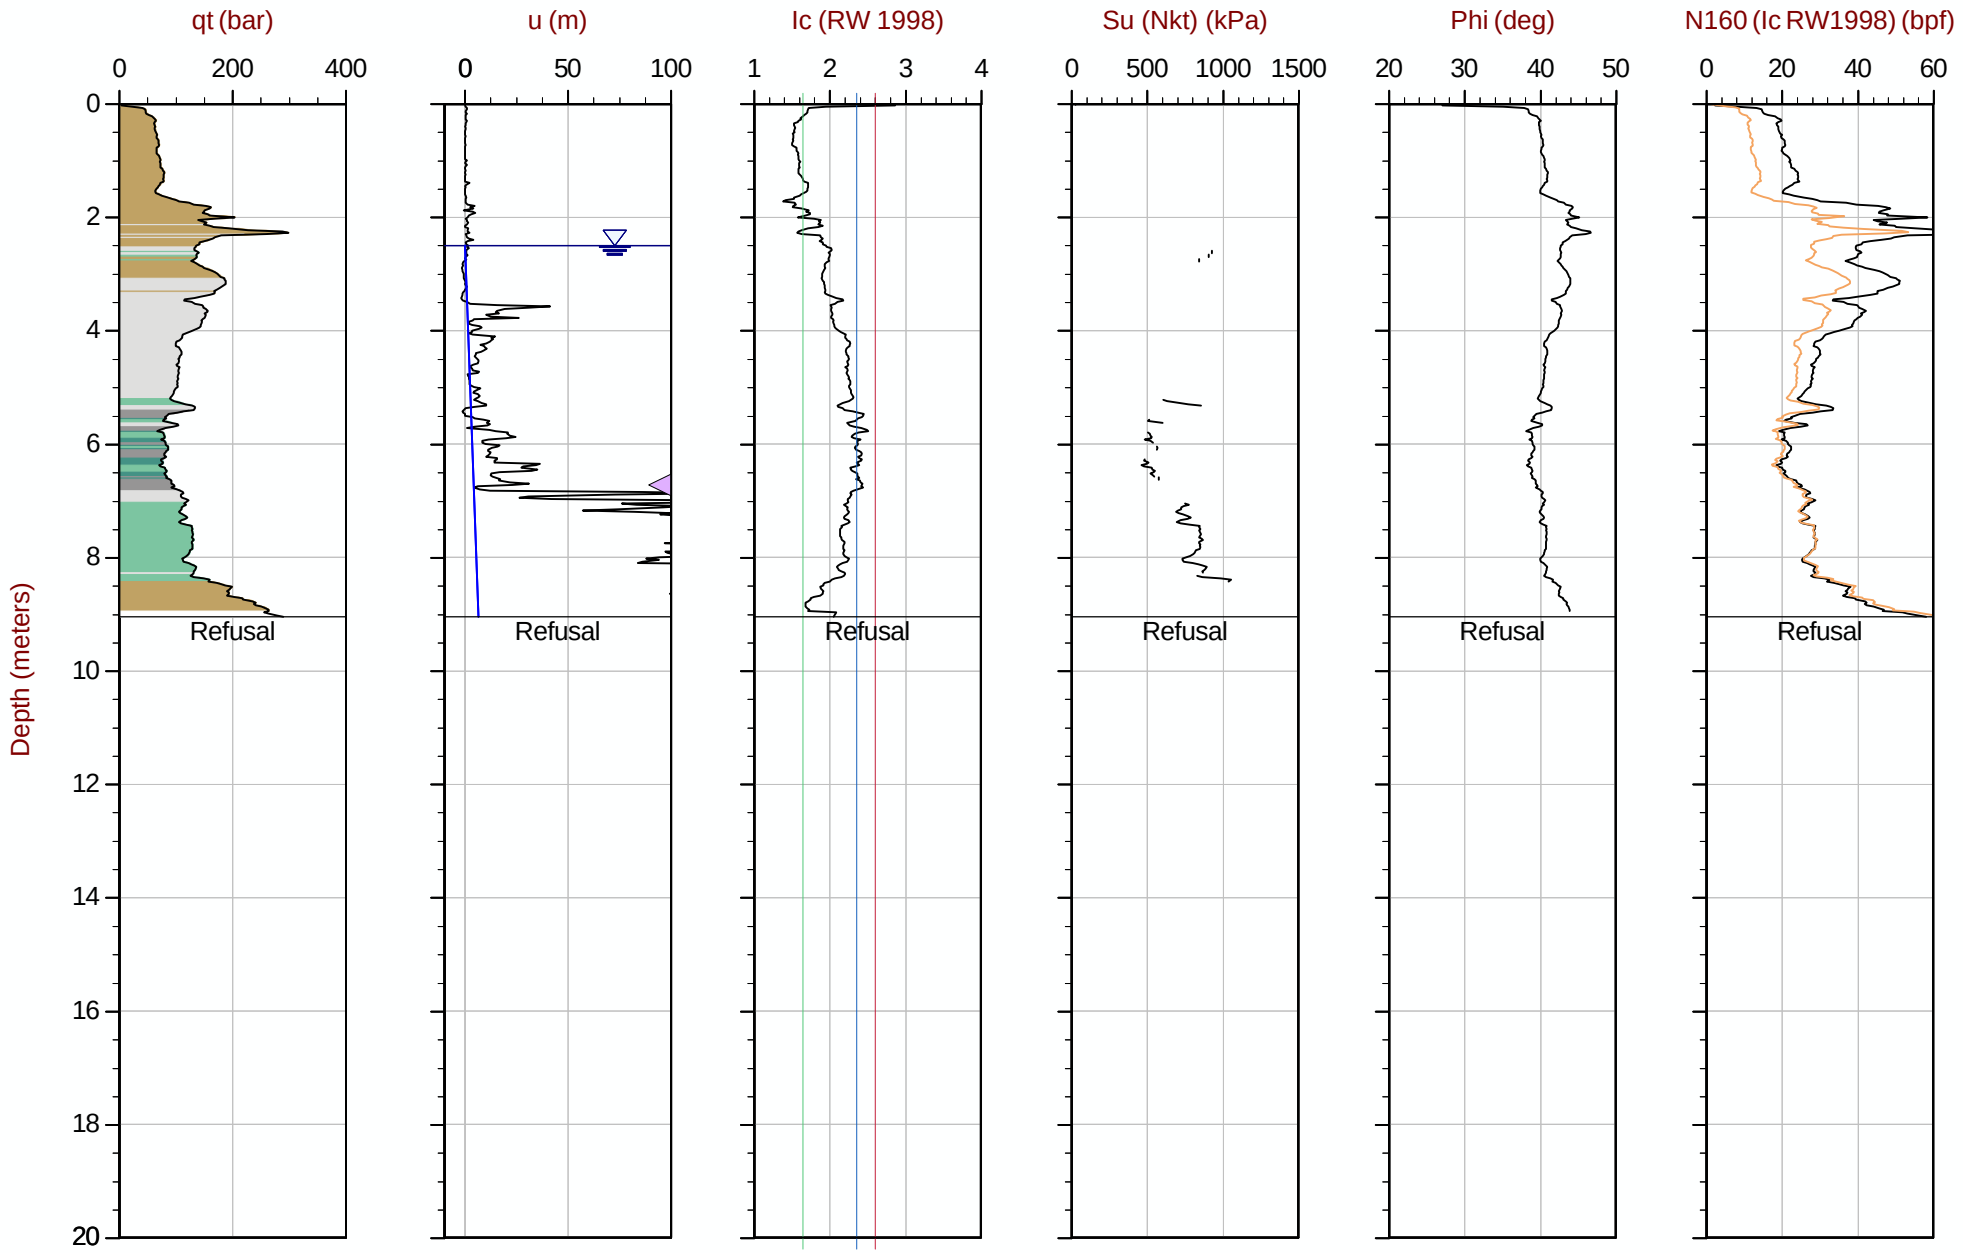

Max Depth: 9.050 m / 29.69 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT153A.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612604m E: 414909m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 07:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT154
Cone: 750:T1500F15U35 Area= 15cm2

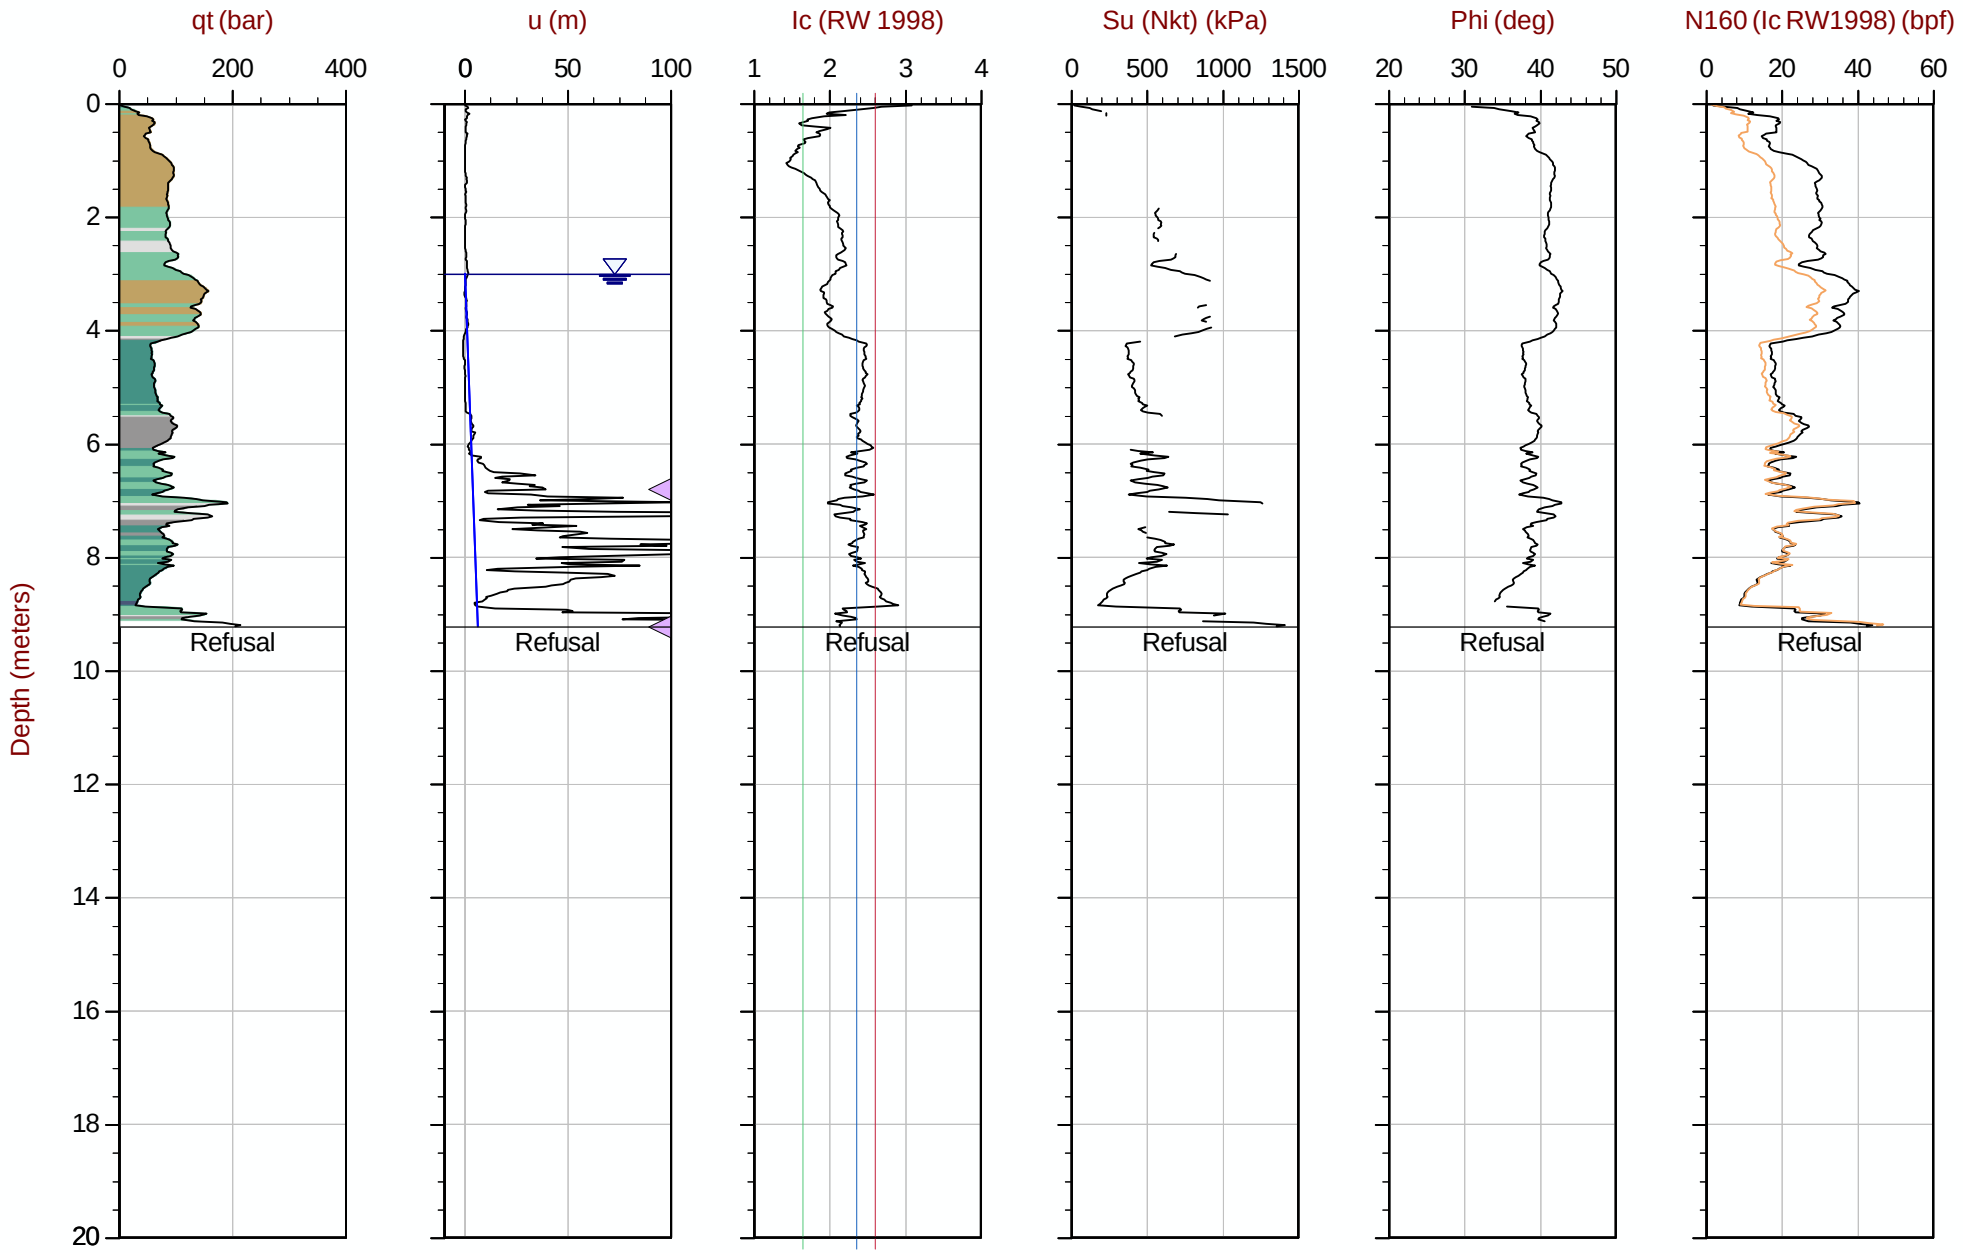

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT154.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612607m E: 414509m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 12:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT155
Cone: 750:T1500F15U35 Area= 15cm2

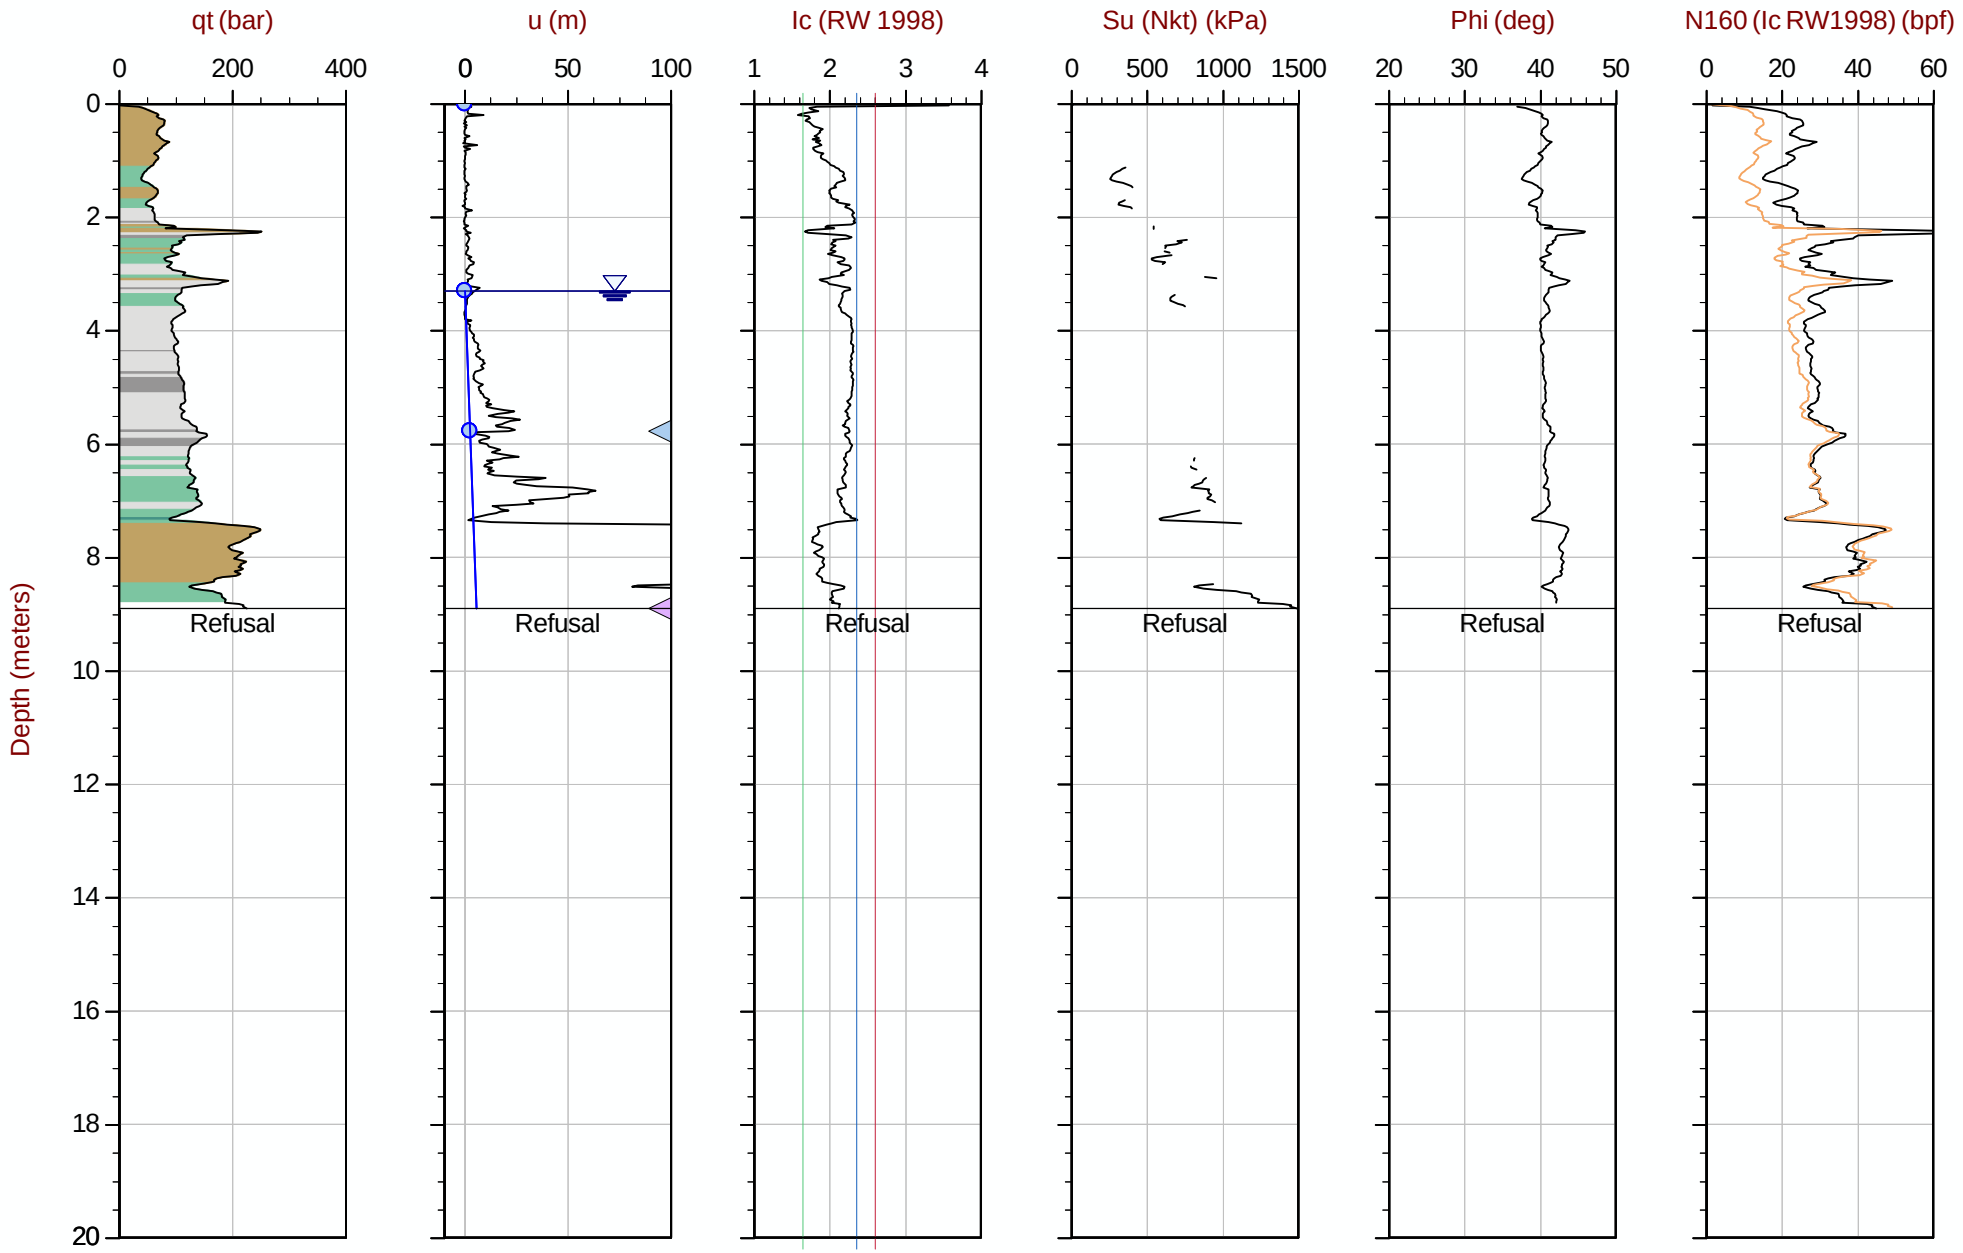

Max Depth: 8.900 m / 29.20 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT155.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612604m E: 415110m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT156
Cone: 750:T1500F15U35 Area= 15cm2

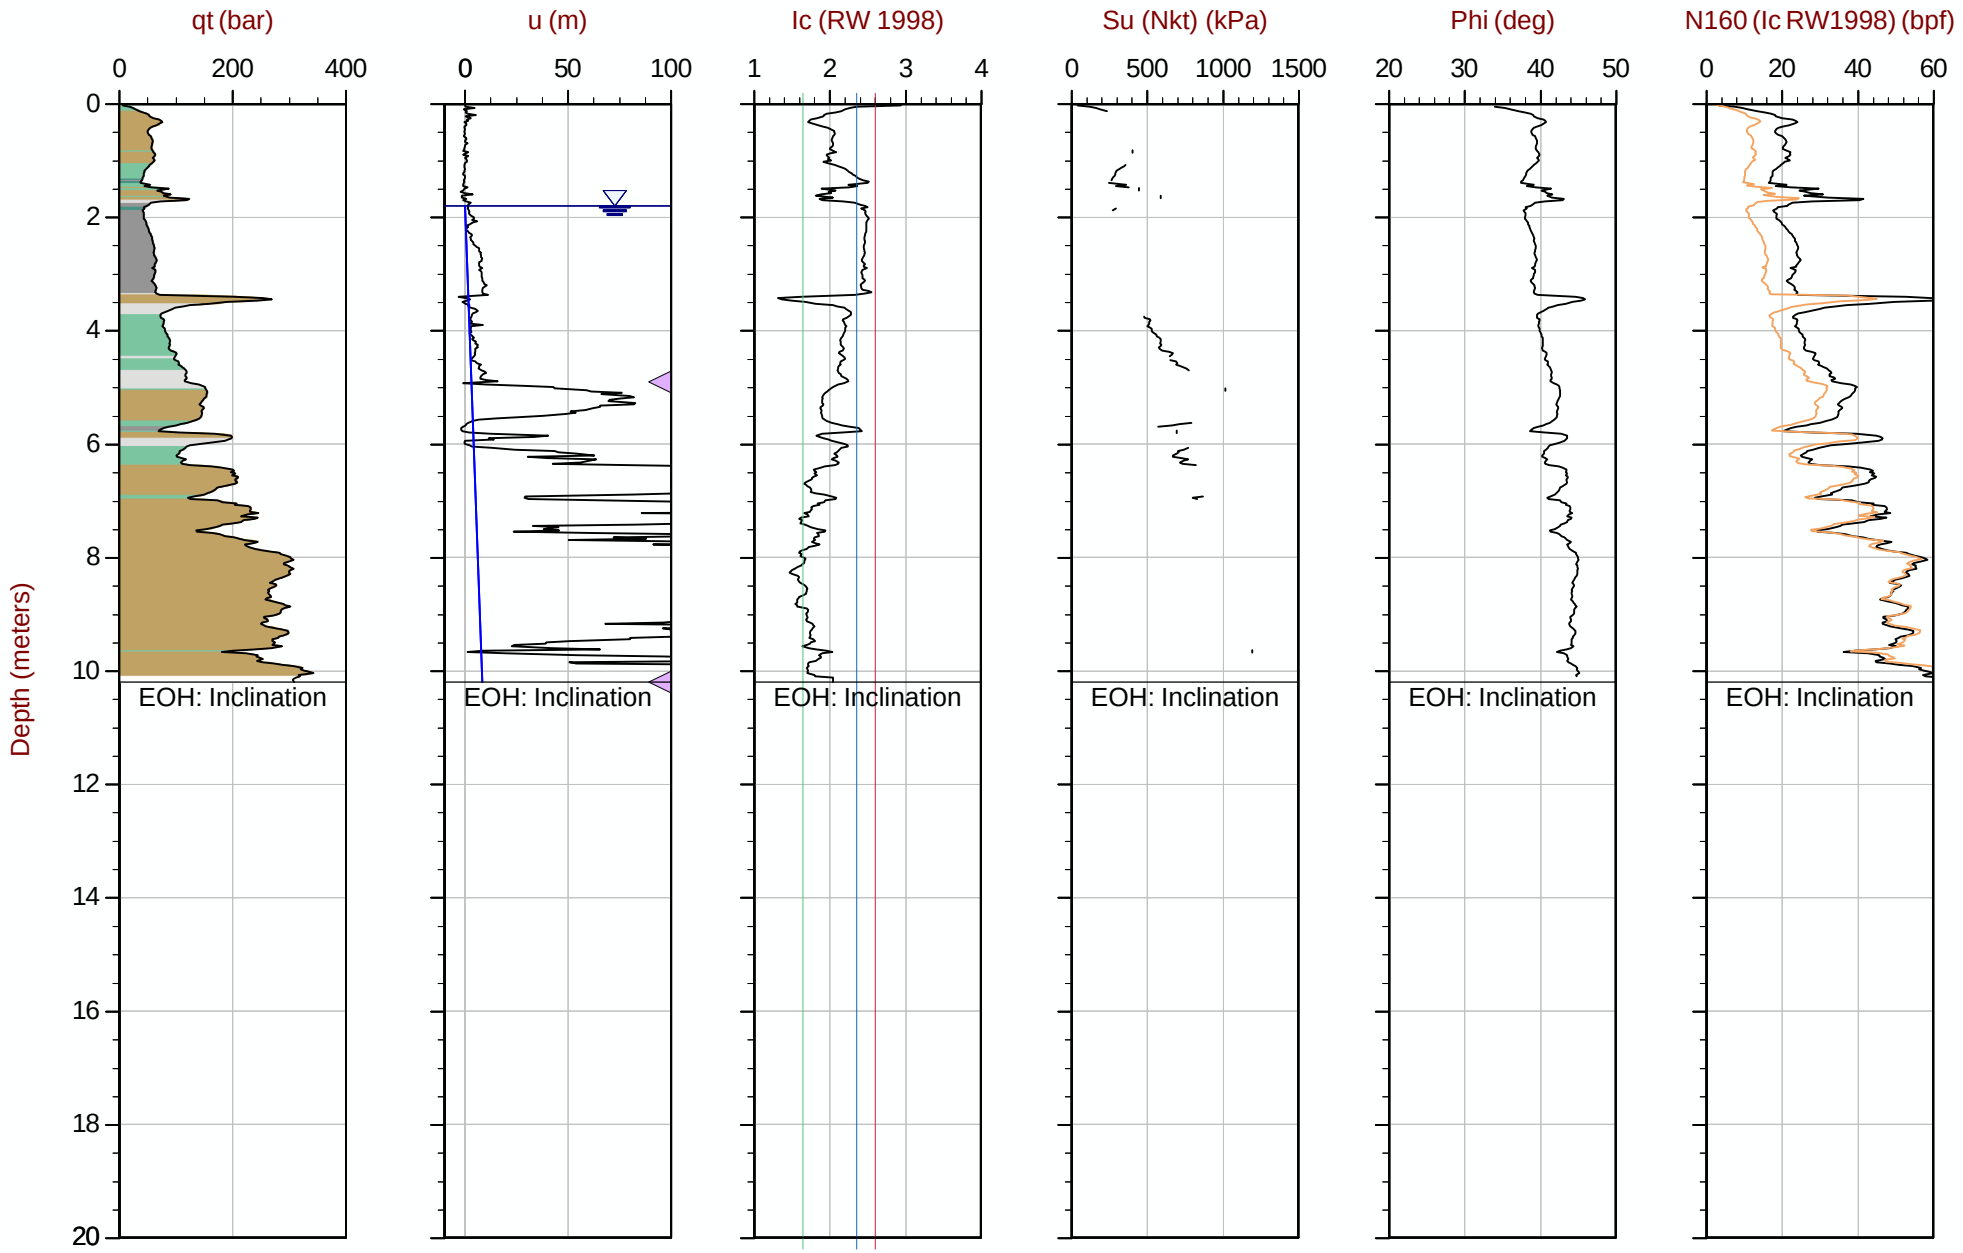

Max Depth: 10.200 m / 33.46 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT156.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612602m E: 415210m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT157
Cone: 750:T1500F15U35 Area= 15cm2

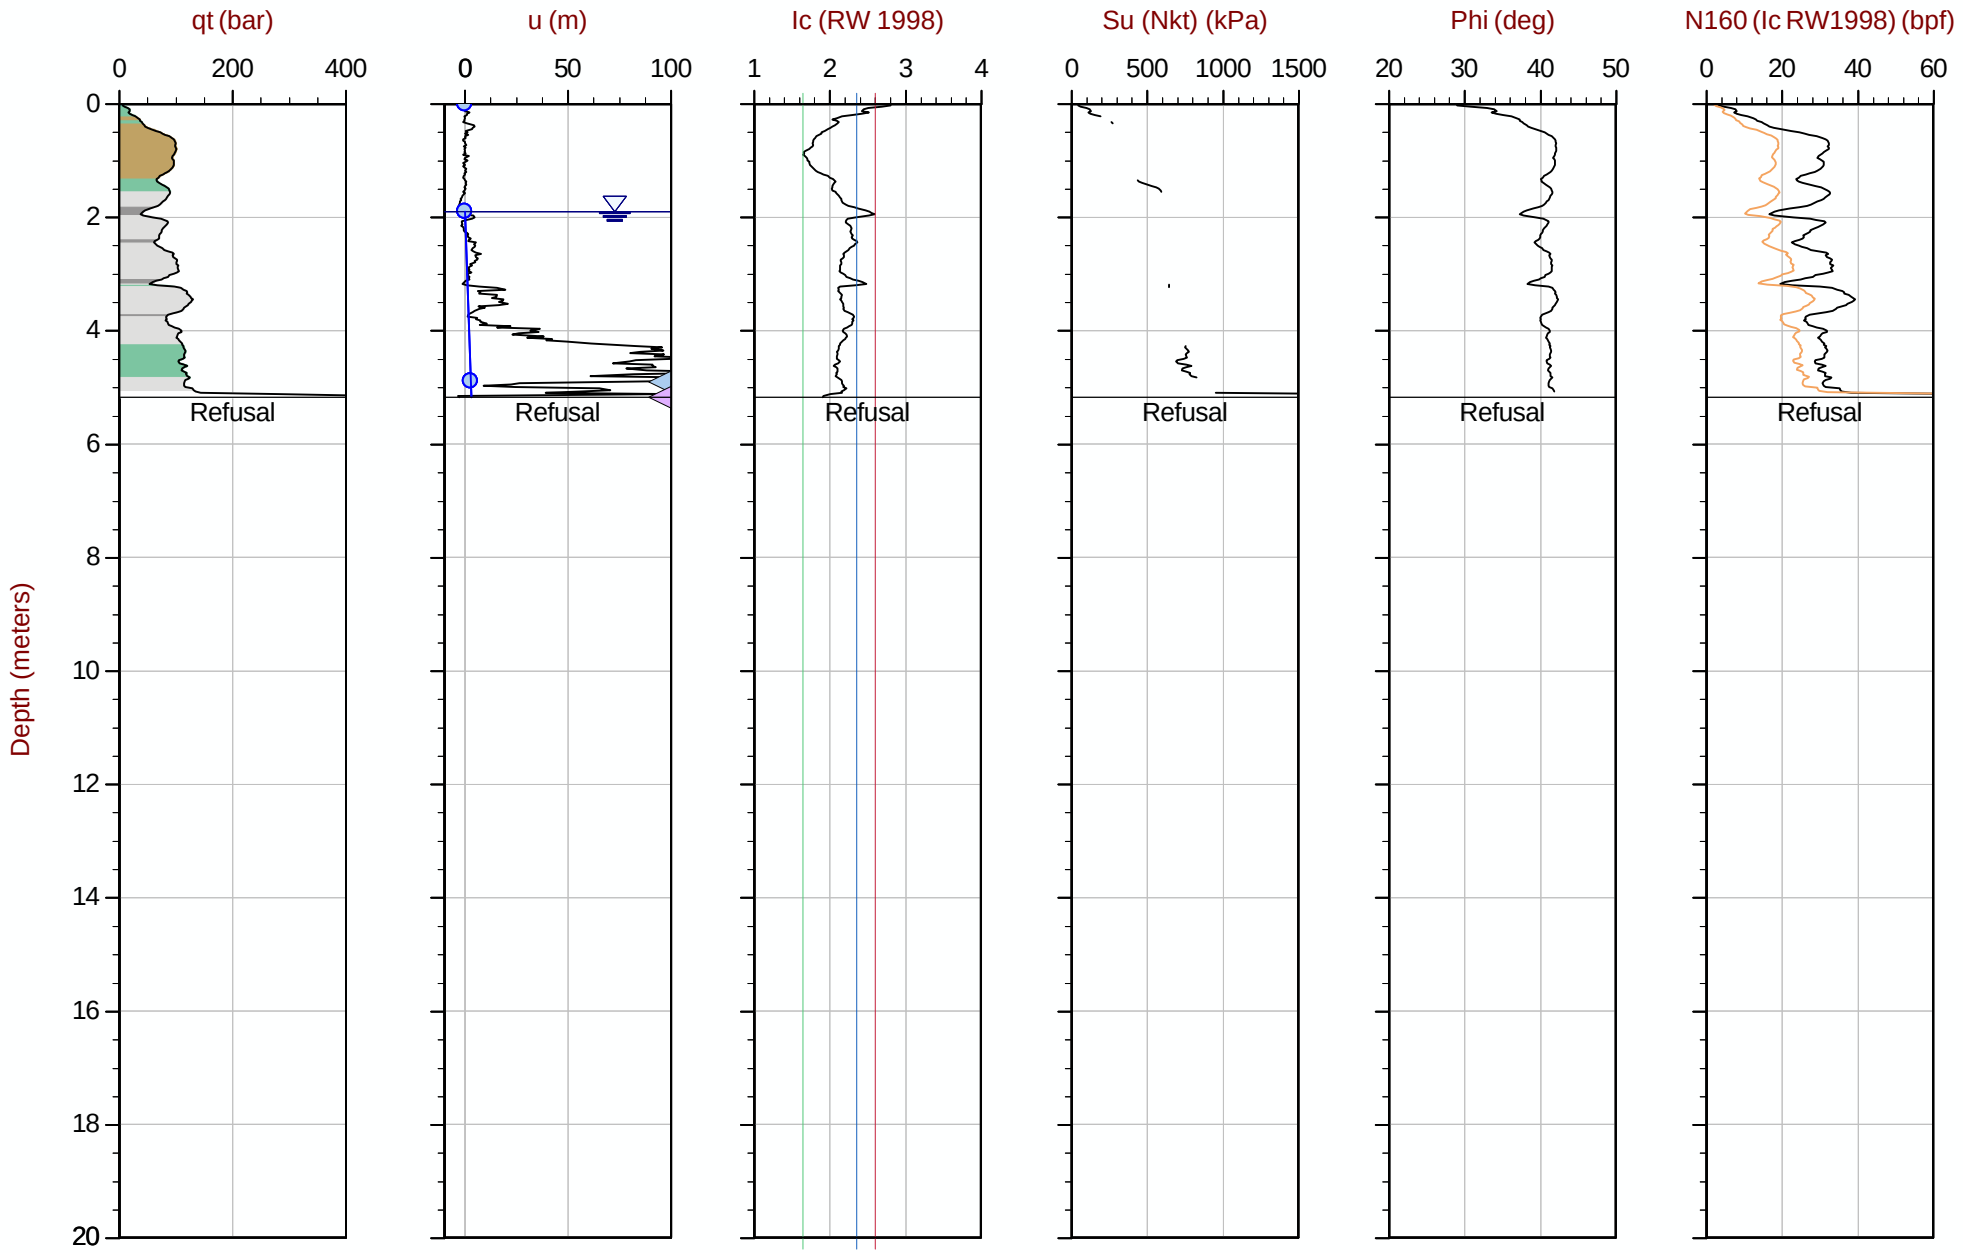

Max Depth: 5.175 m / 16.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT157.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 415311m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 15:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT158
Cone: 750:T1500F15U35 Area= 15cm2

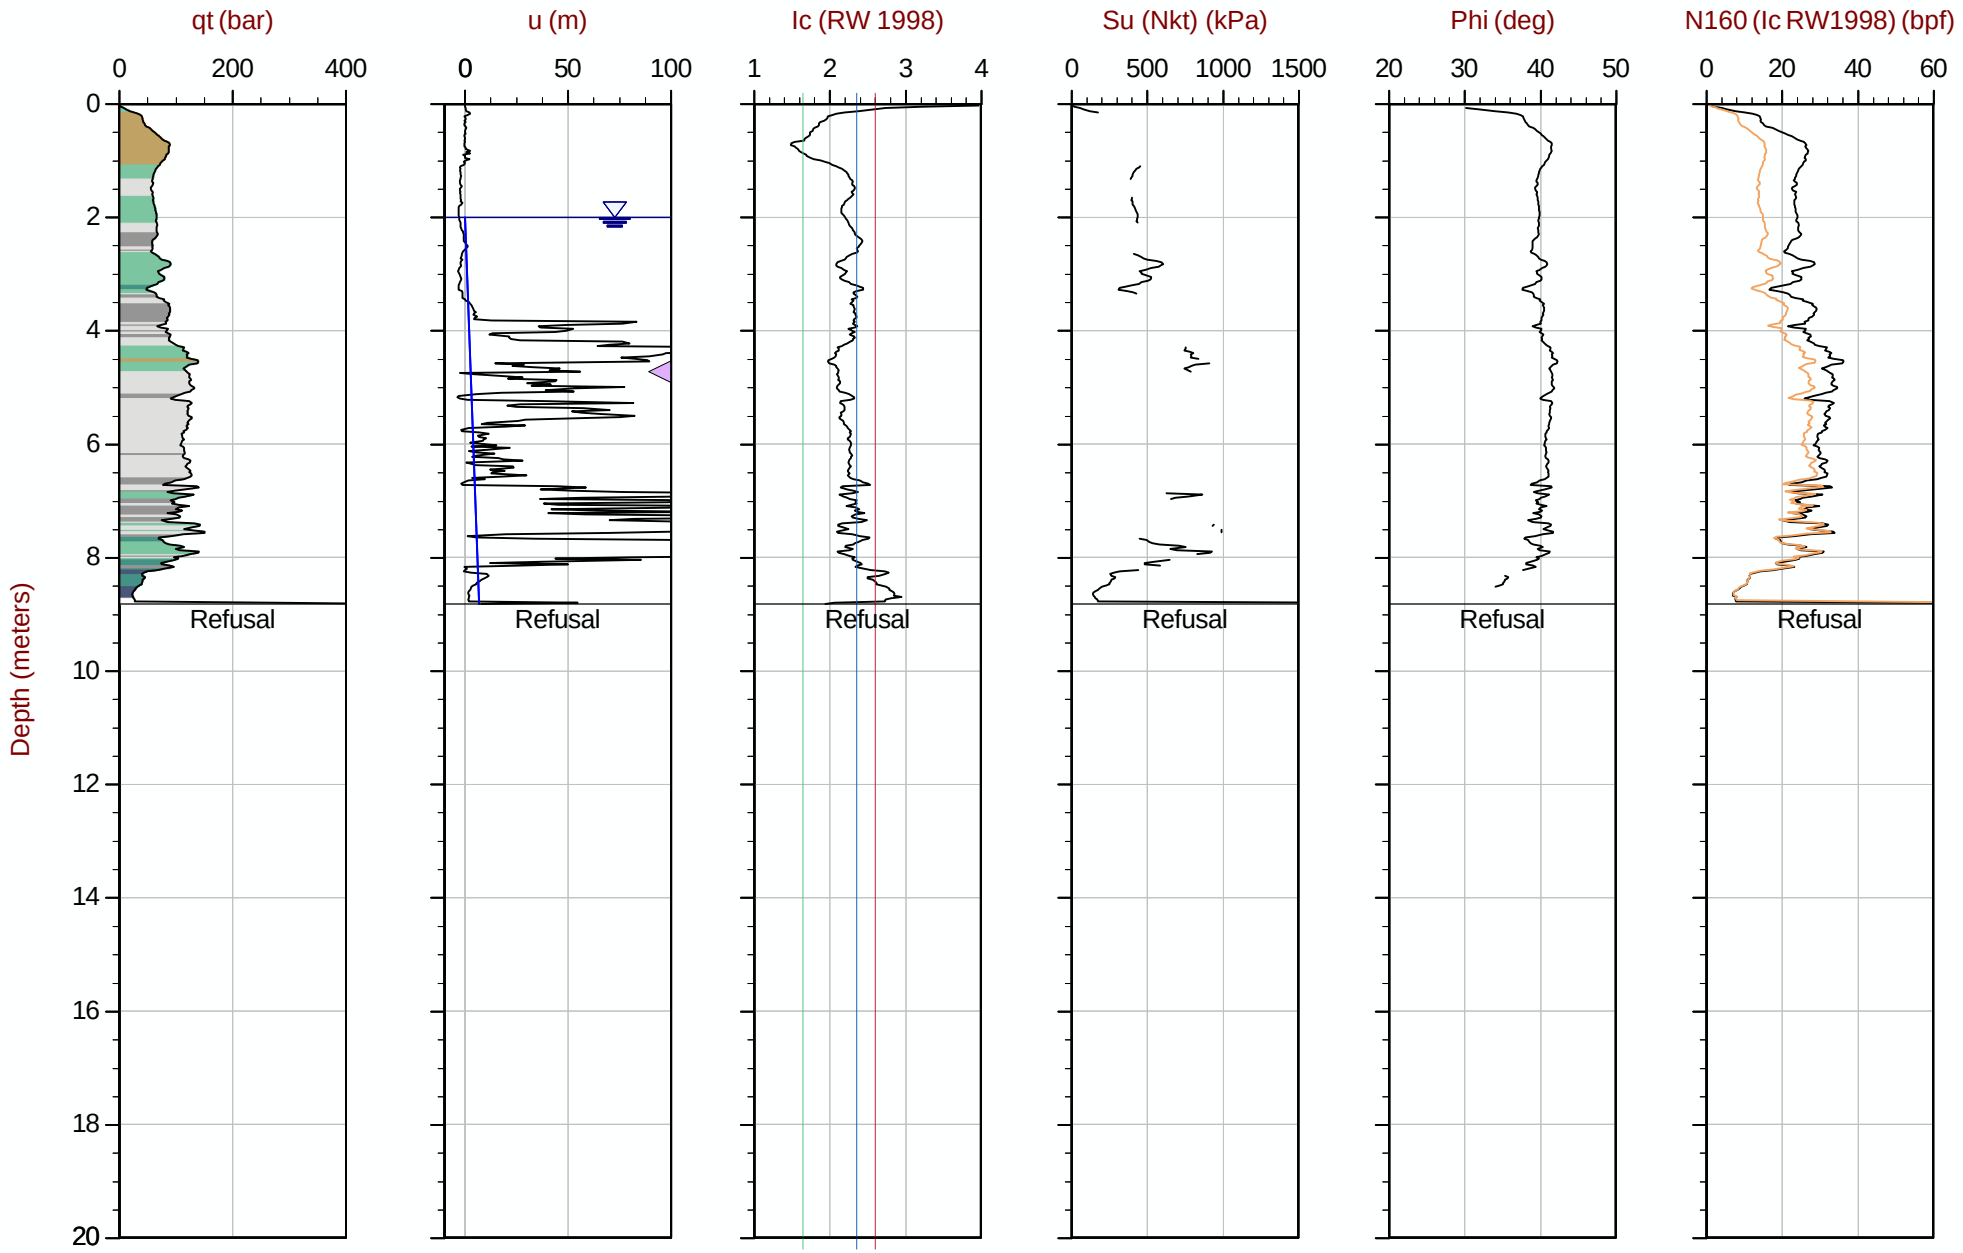

Max Depth: 8.825 m / 28.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT158.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612590m E: 415411m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 12:12
Site: Brooks, Alberta

Sounding: RCPT22-22CPT160
Cone: 822:T1000F10U35 Area= 15cm2

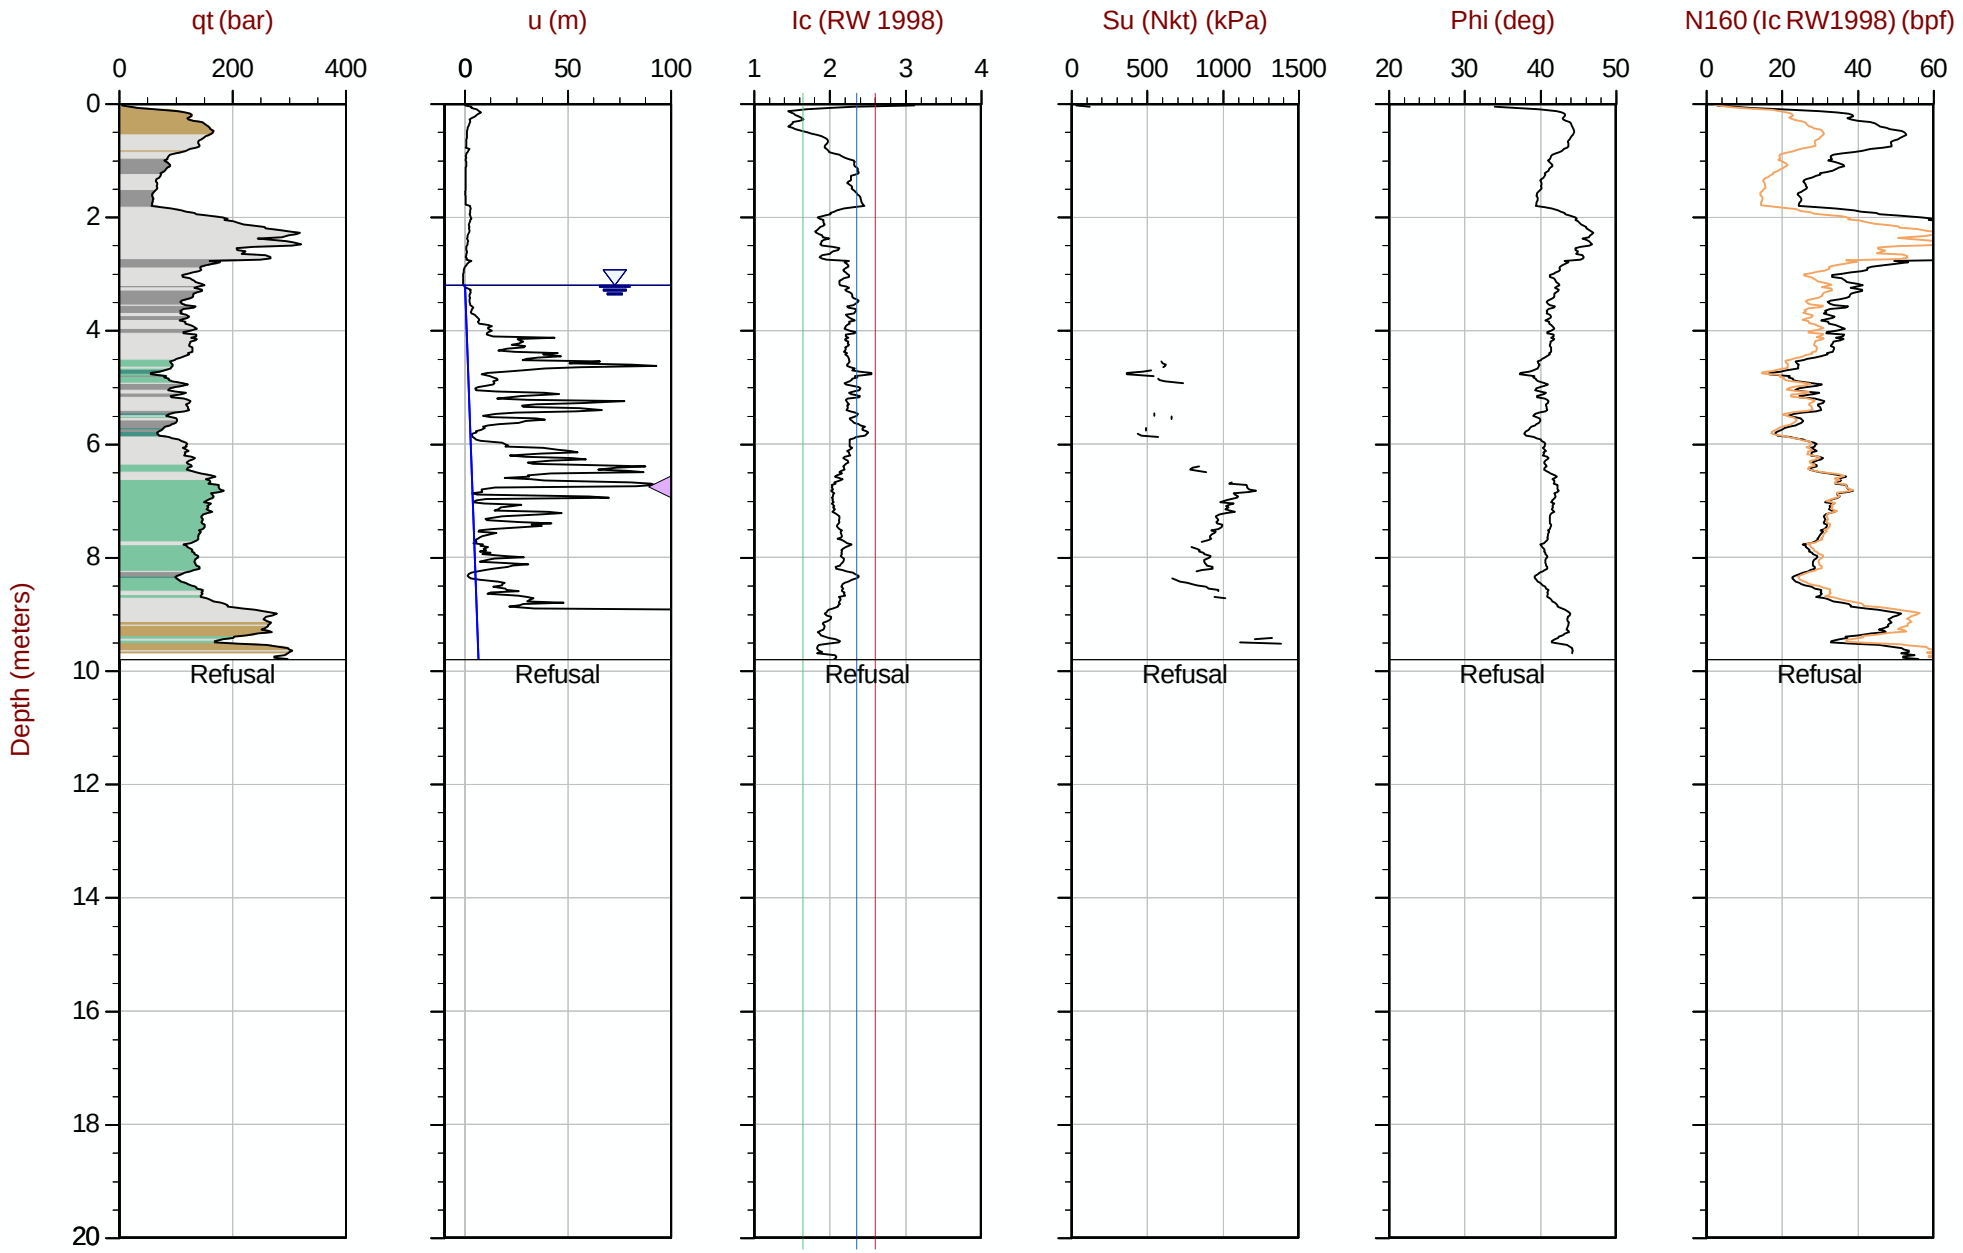

Max Depth: 9.800 m / 32.15 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT160.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612584m E: 415609m Elev: 771.024m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 13:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161
Cone: 750:T1500F15U35 Area= 15cm2

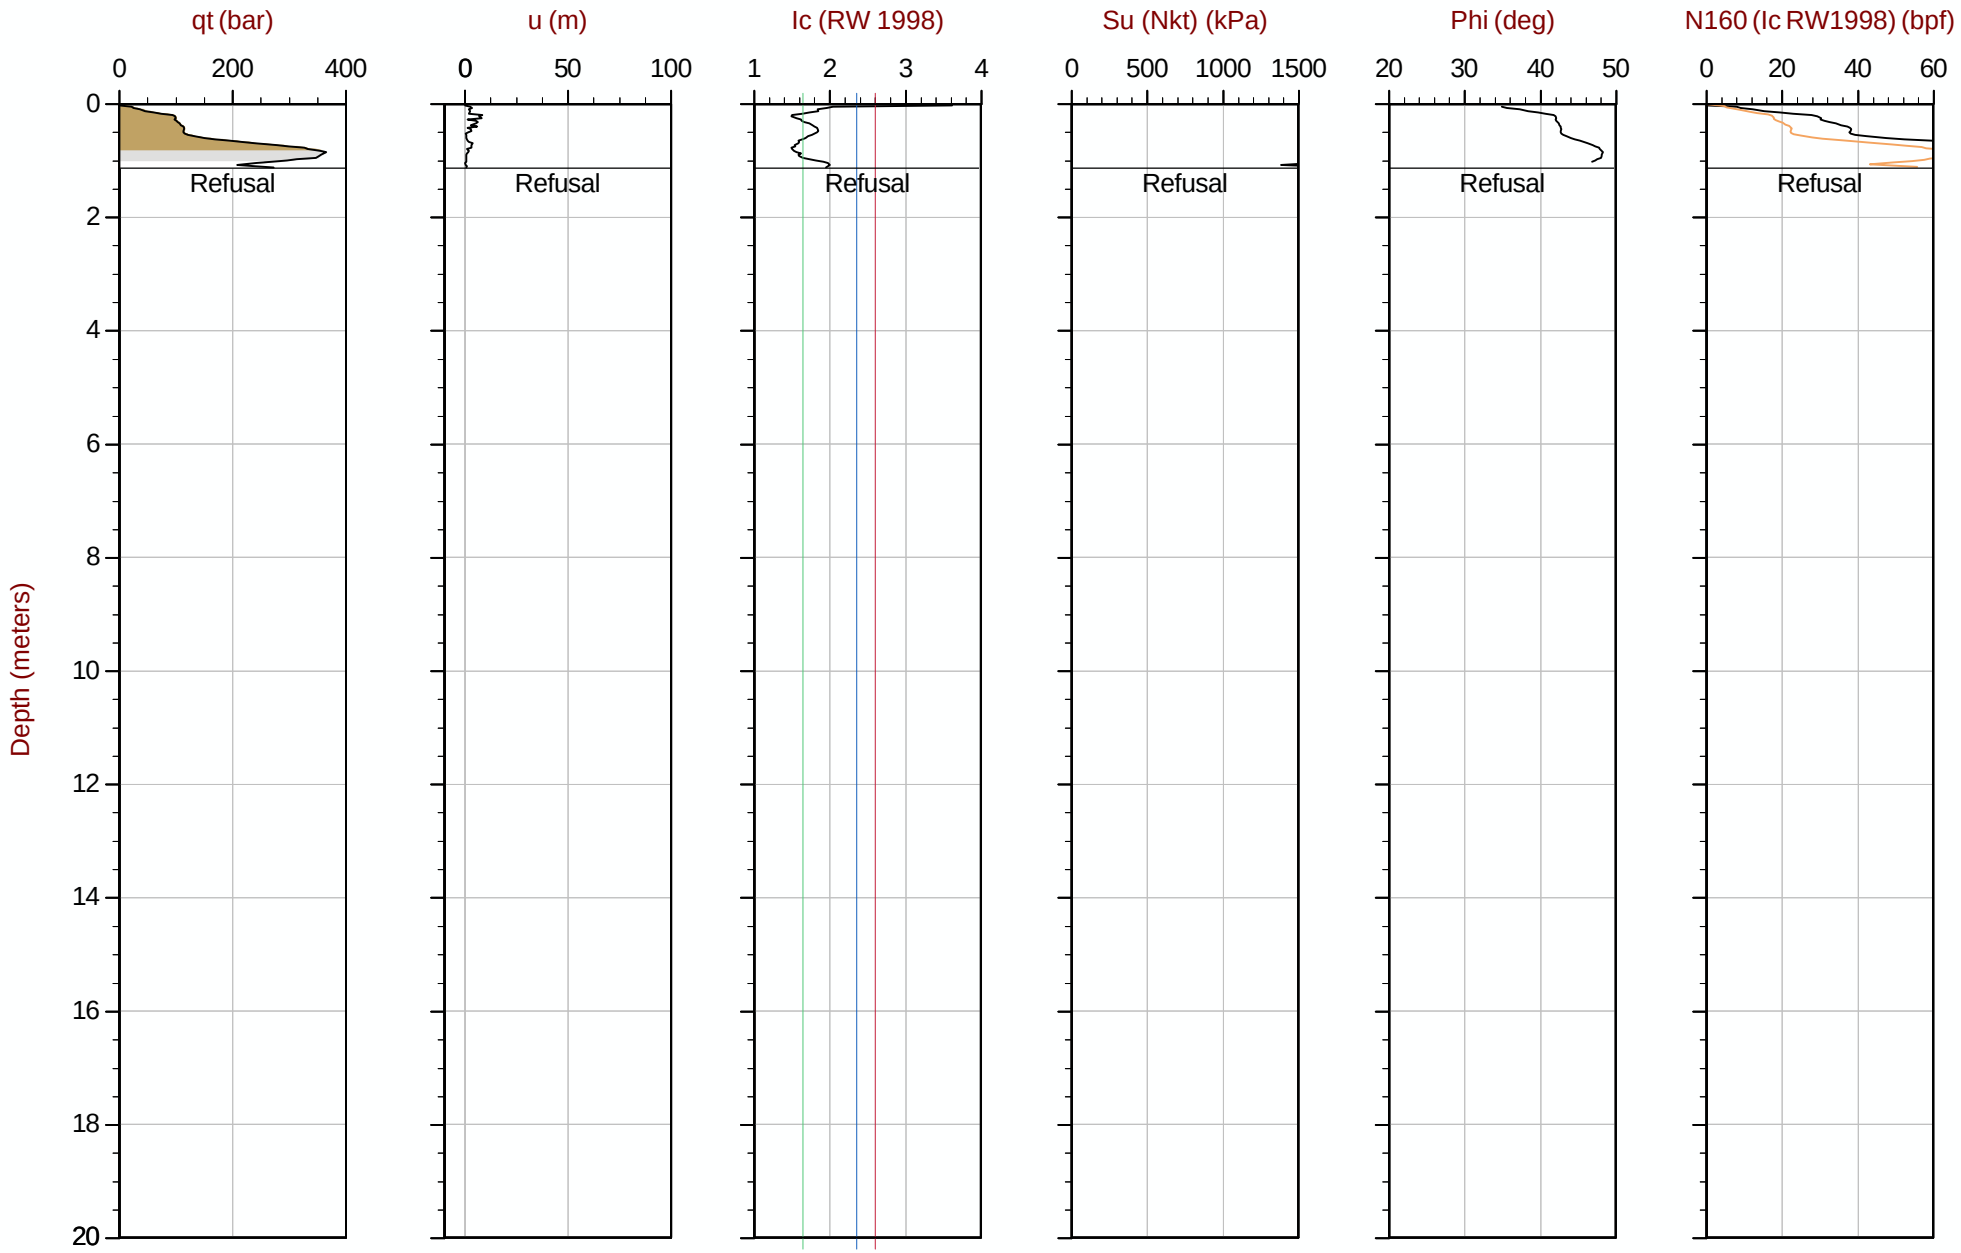

Max Depth: 1.125 m / 3.69 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT161.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612582m E: 415708m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 13:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161A
Cone: 750:T1500F15U35 Area= 15cm2

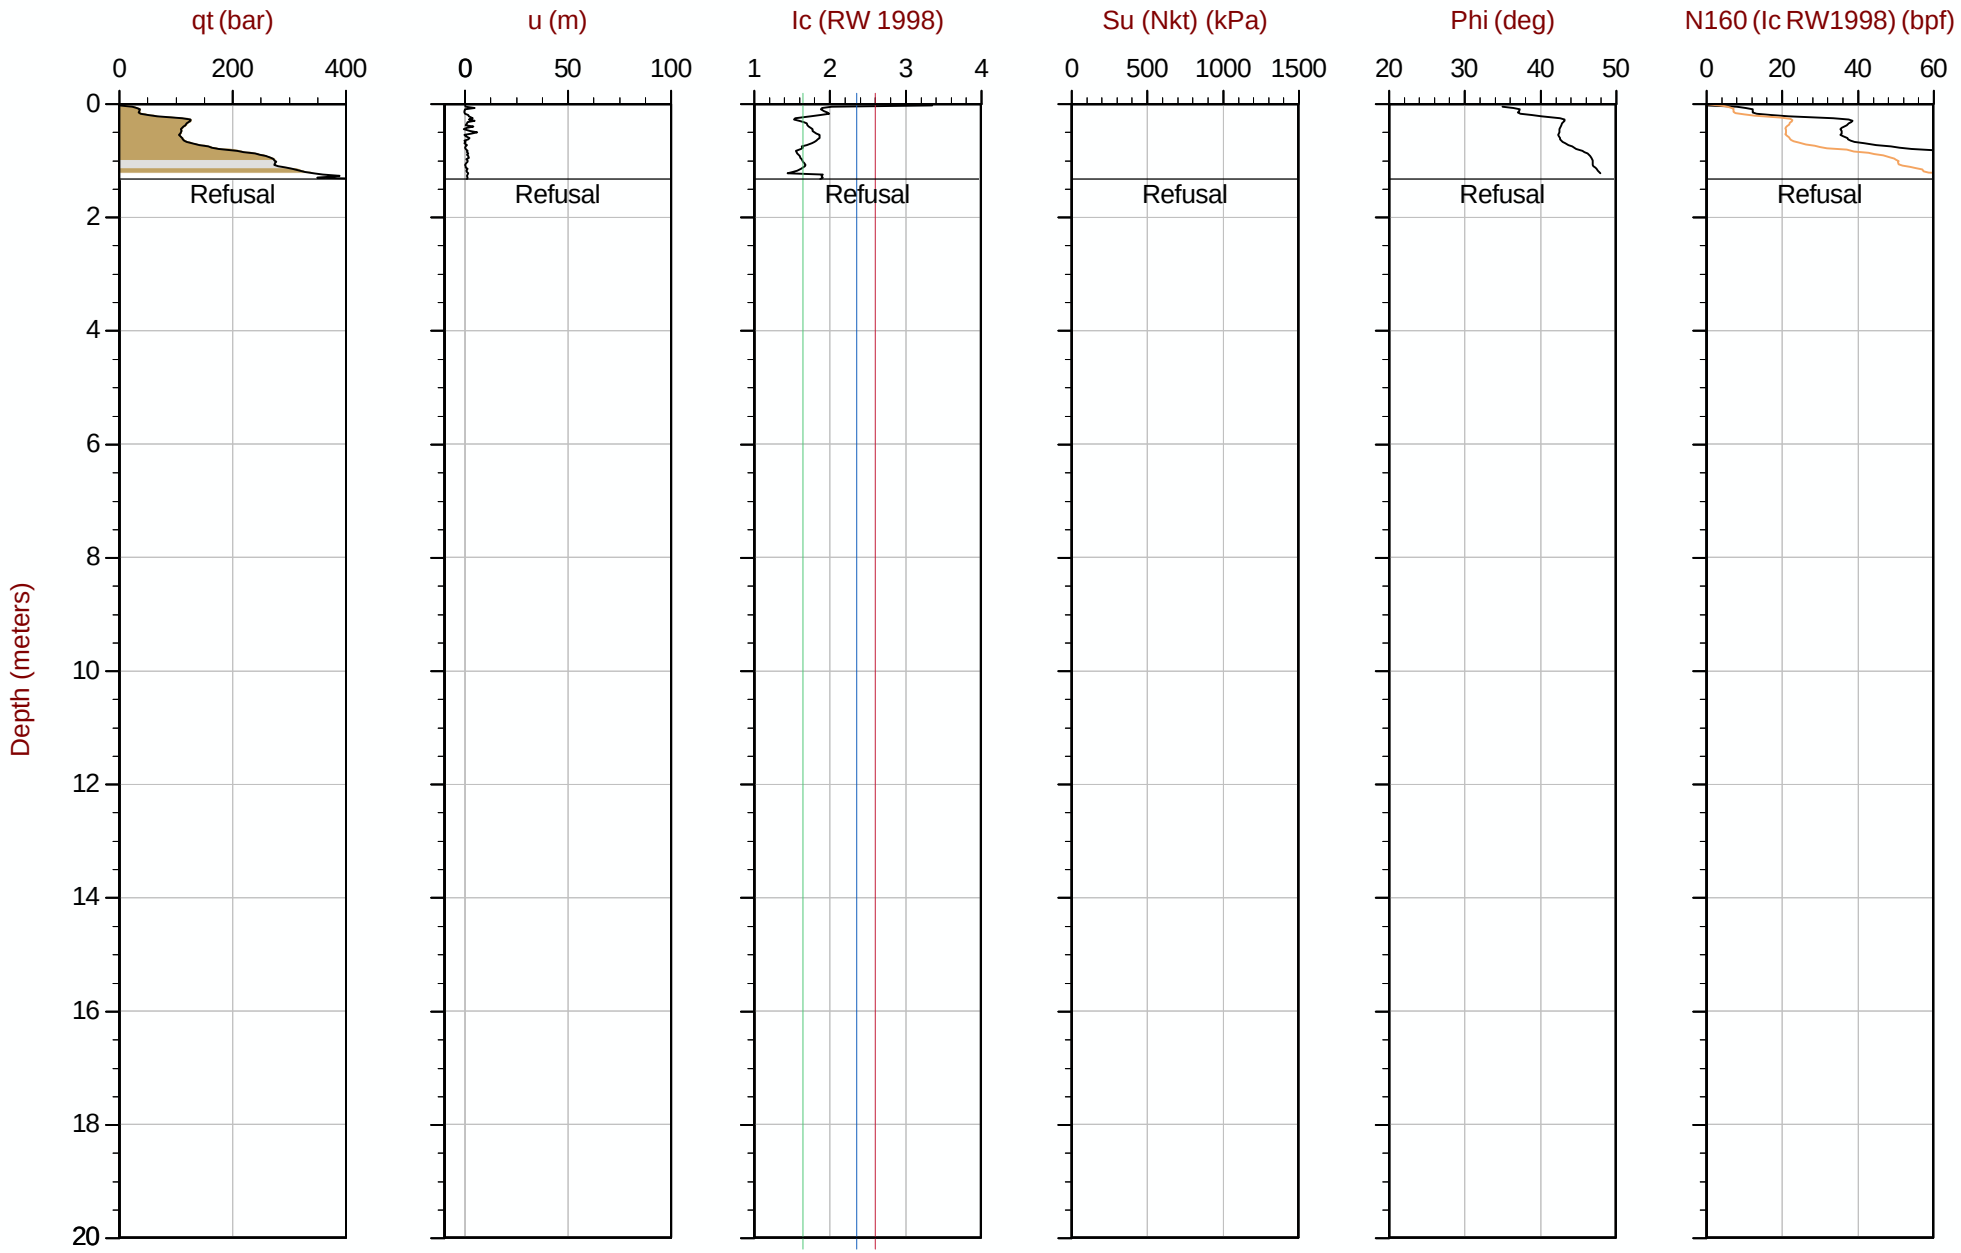

Max Depth: 1.325 m / 4.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT161A.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612582m E: 415708m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 14:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161B
Cone: 750:T1500F15U35 Area= 15cm2

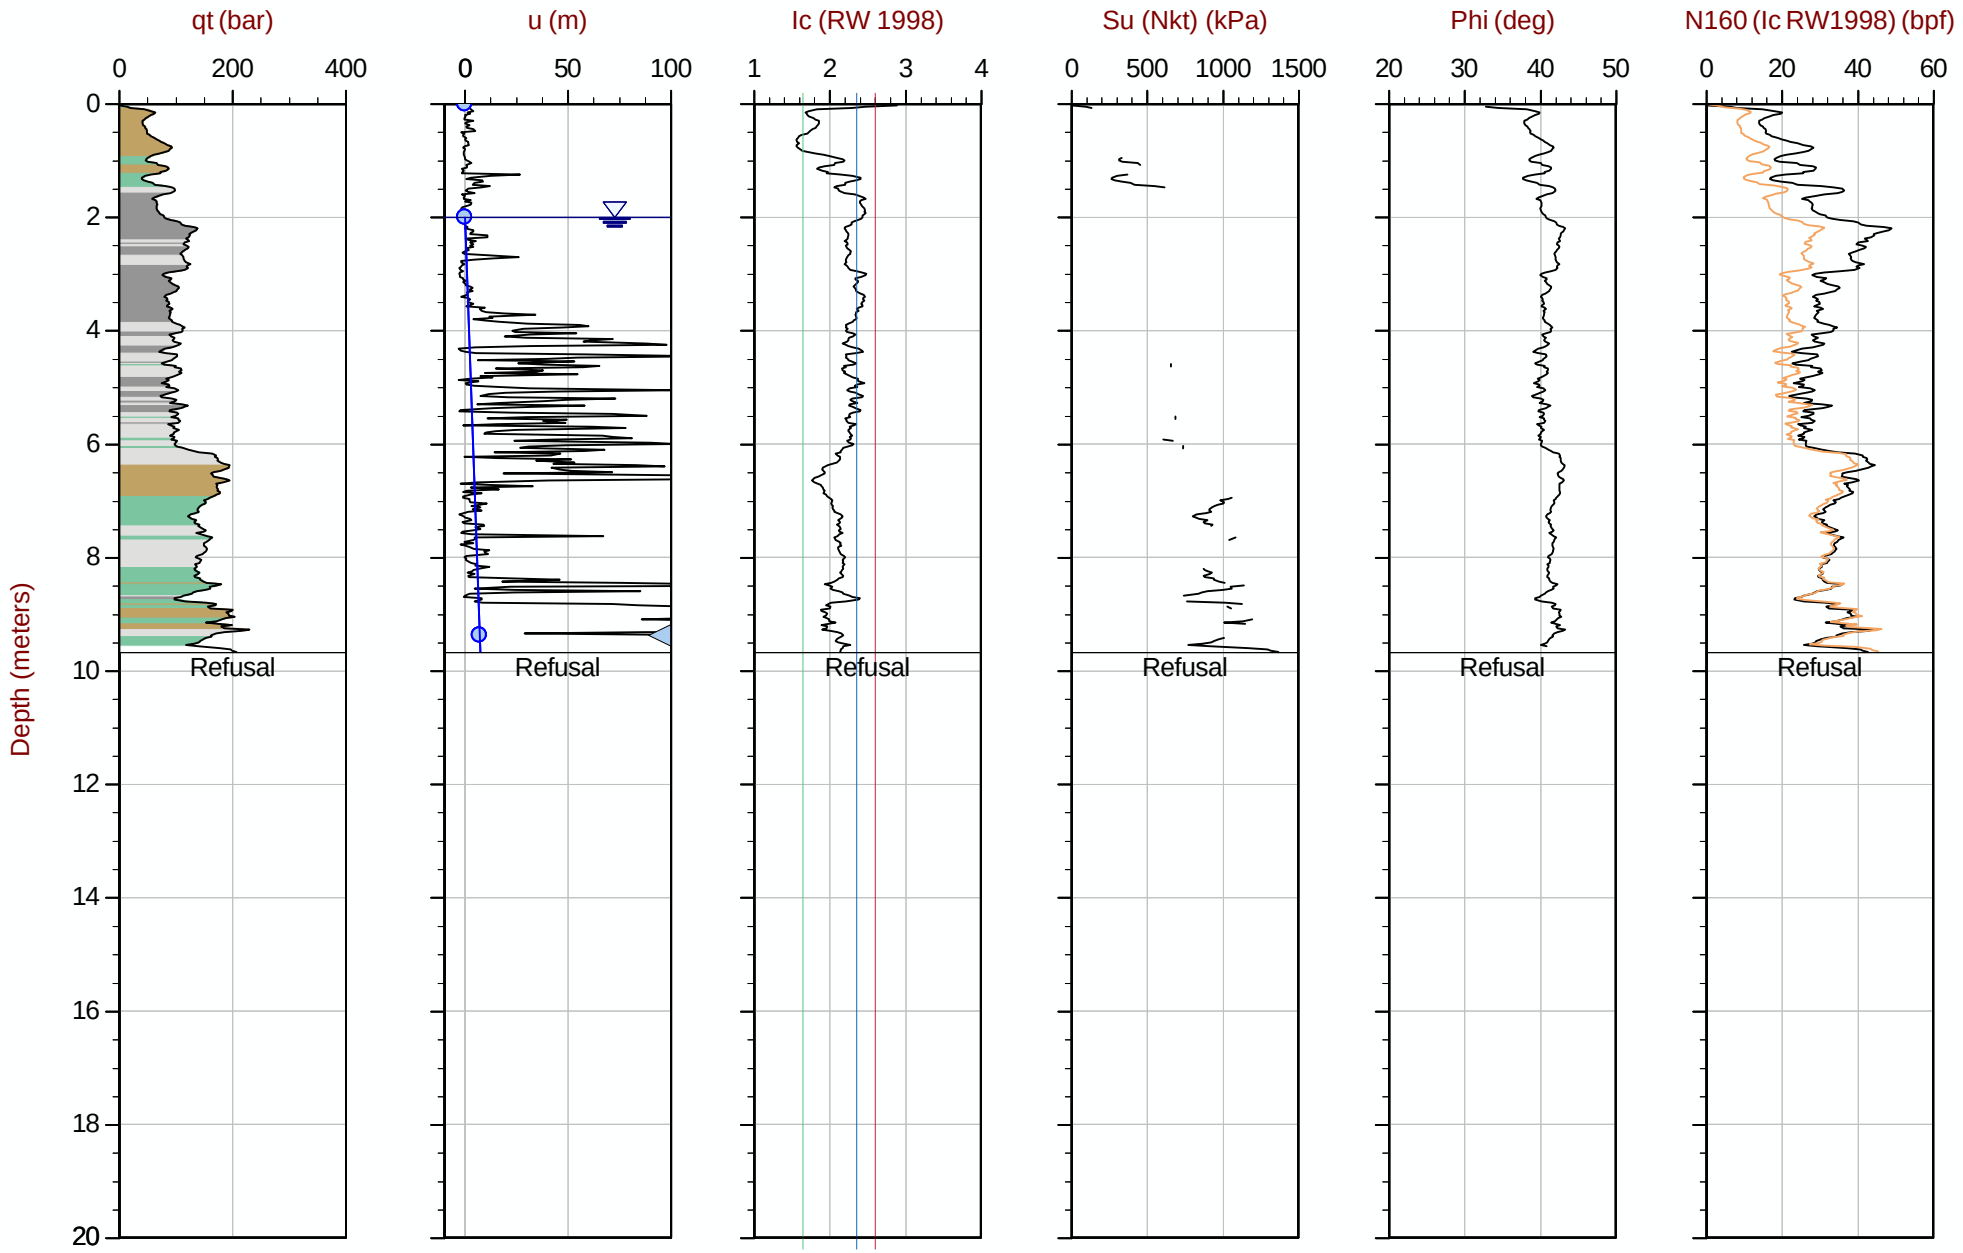

Max Depth: 9.675 m / 31.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT161B.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612582m E: 415708m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 10:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT162
Cone: 750:T1500F15U35 Area= 15cm2

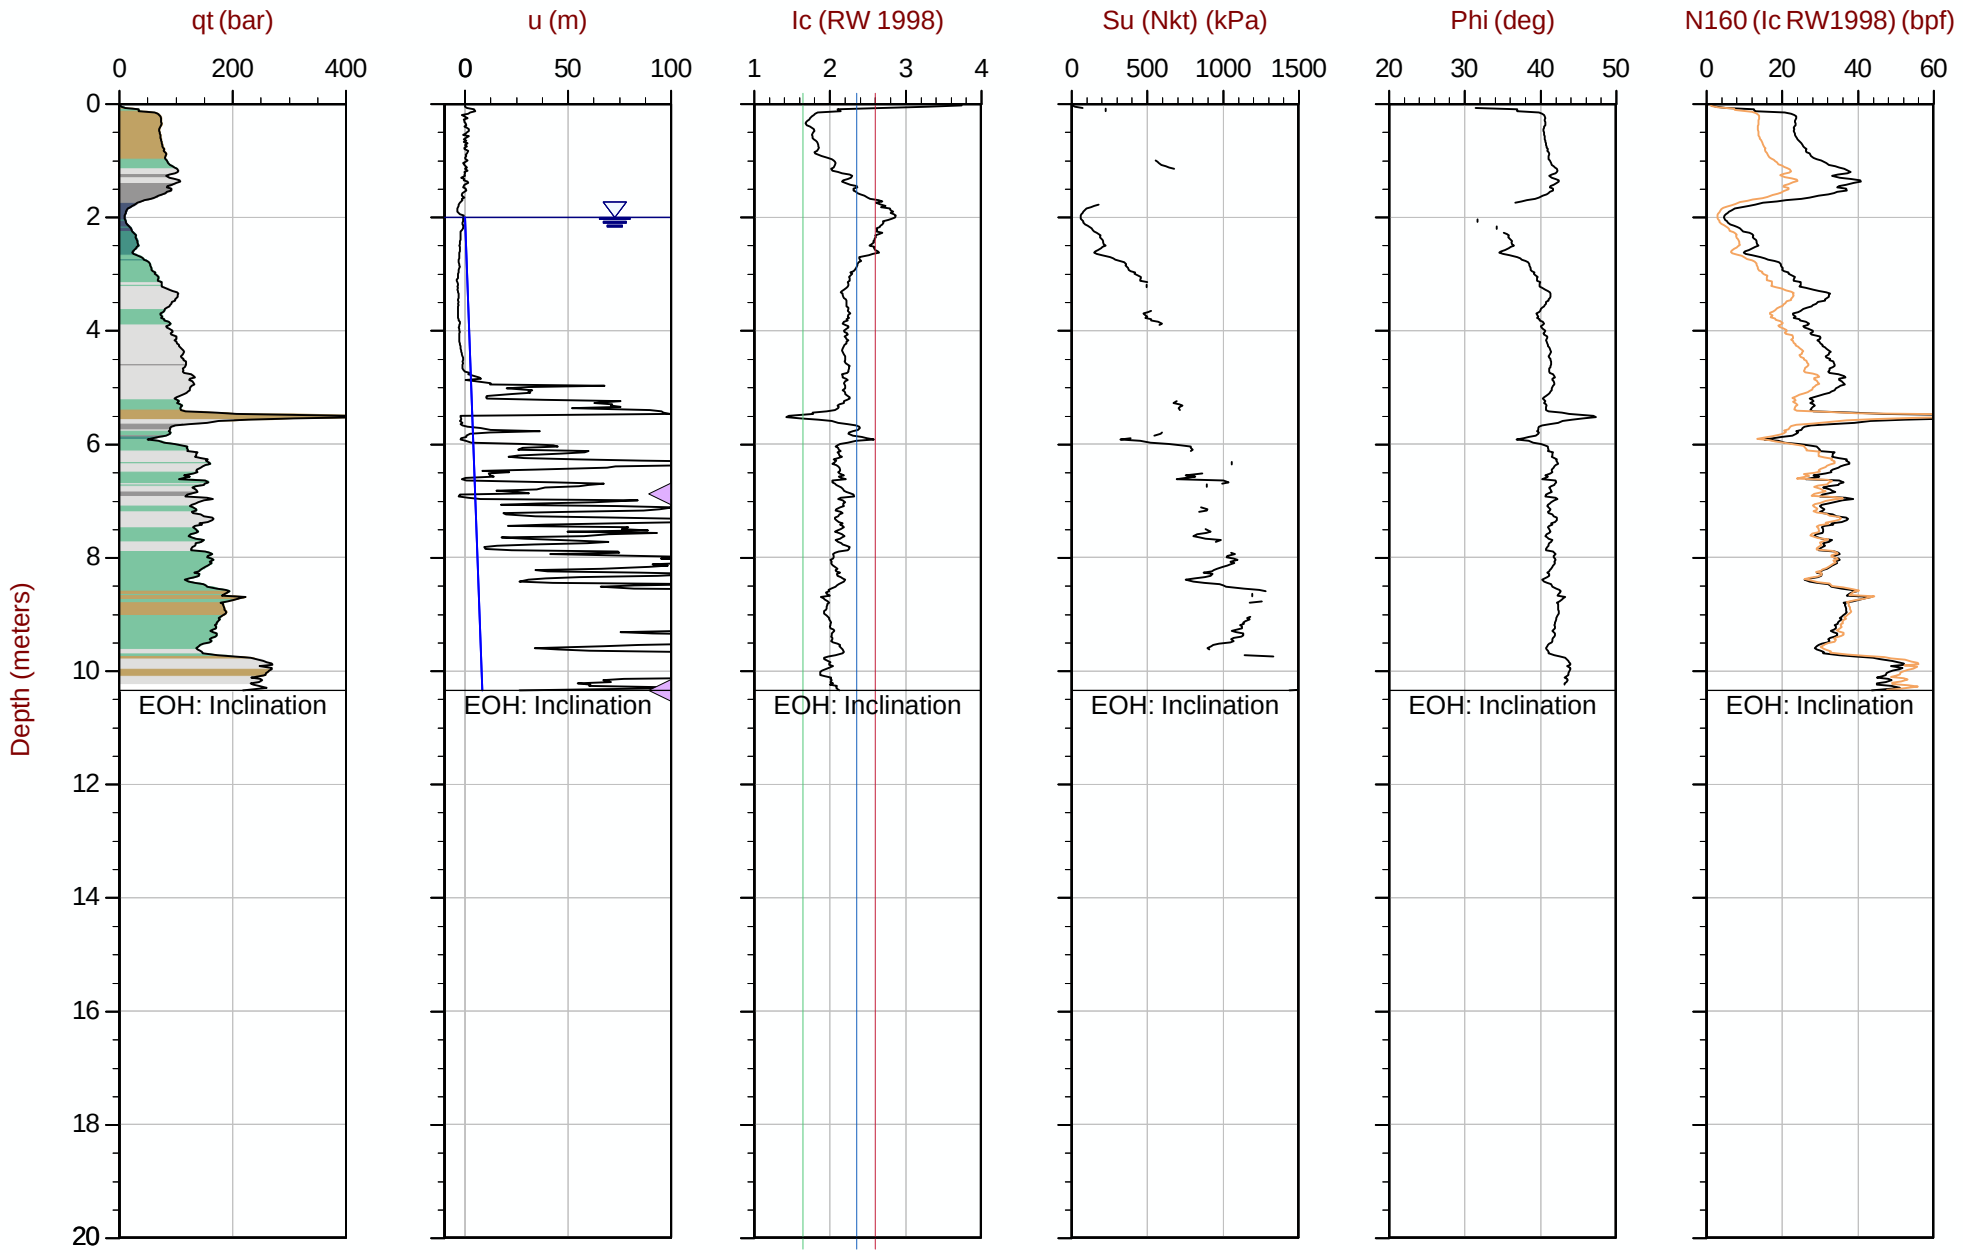

Max Depth: 10.350 m / 33.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT162.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612580m E: 415808m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-14 06:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT163
Cone: 821:T1000F10U35 Area= 15cm2

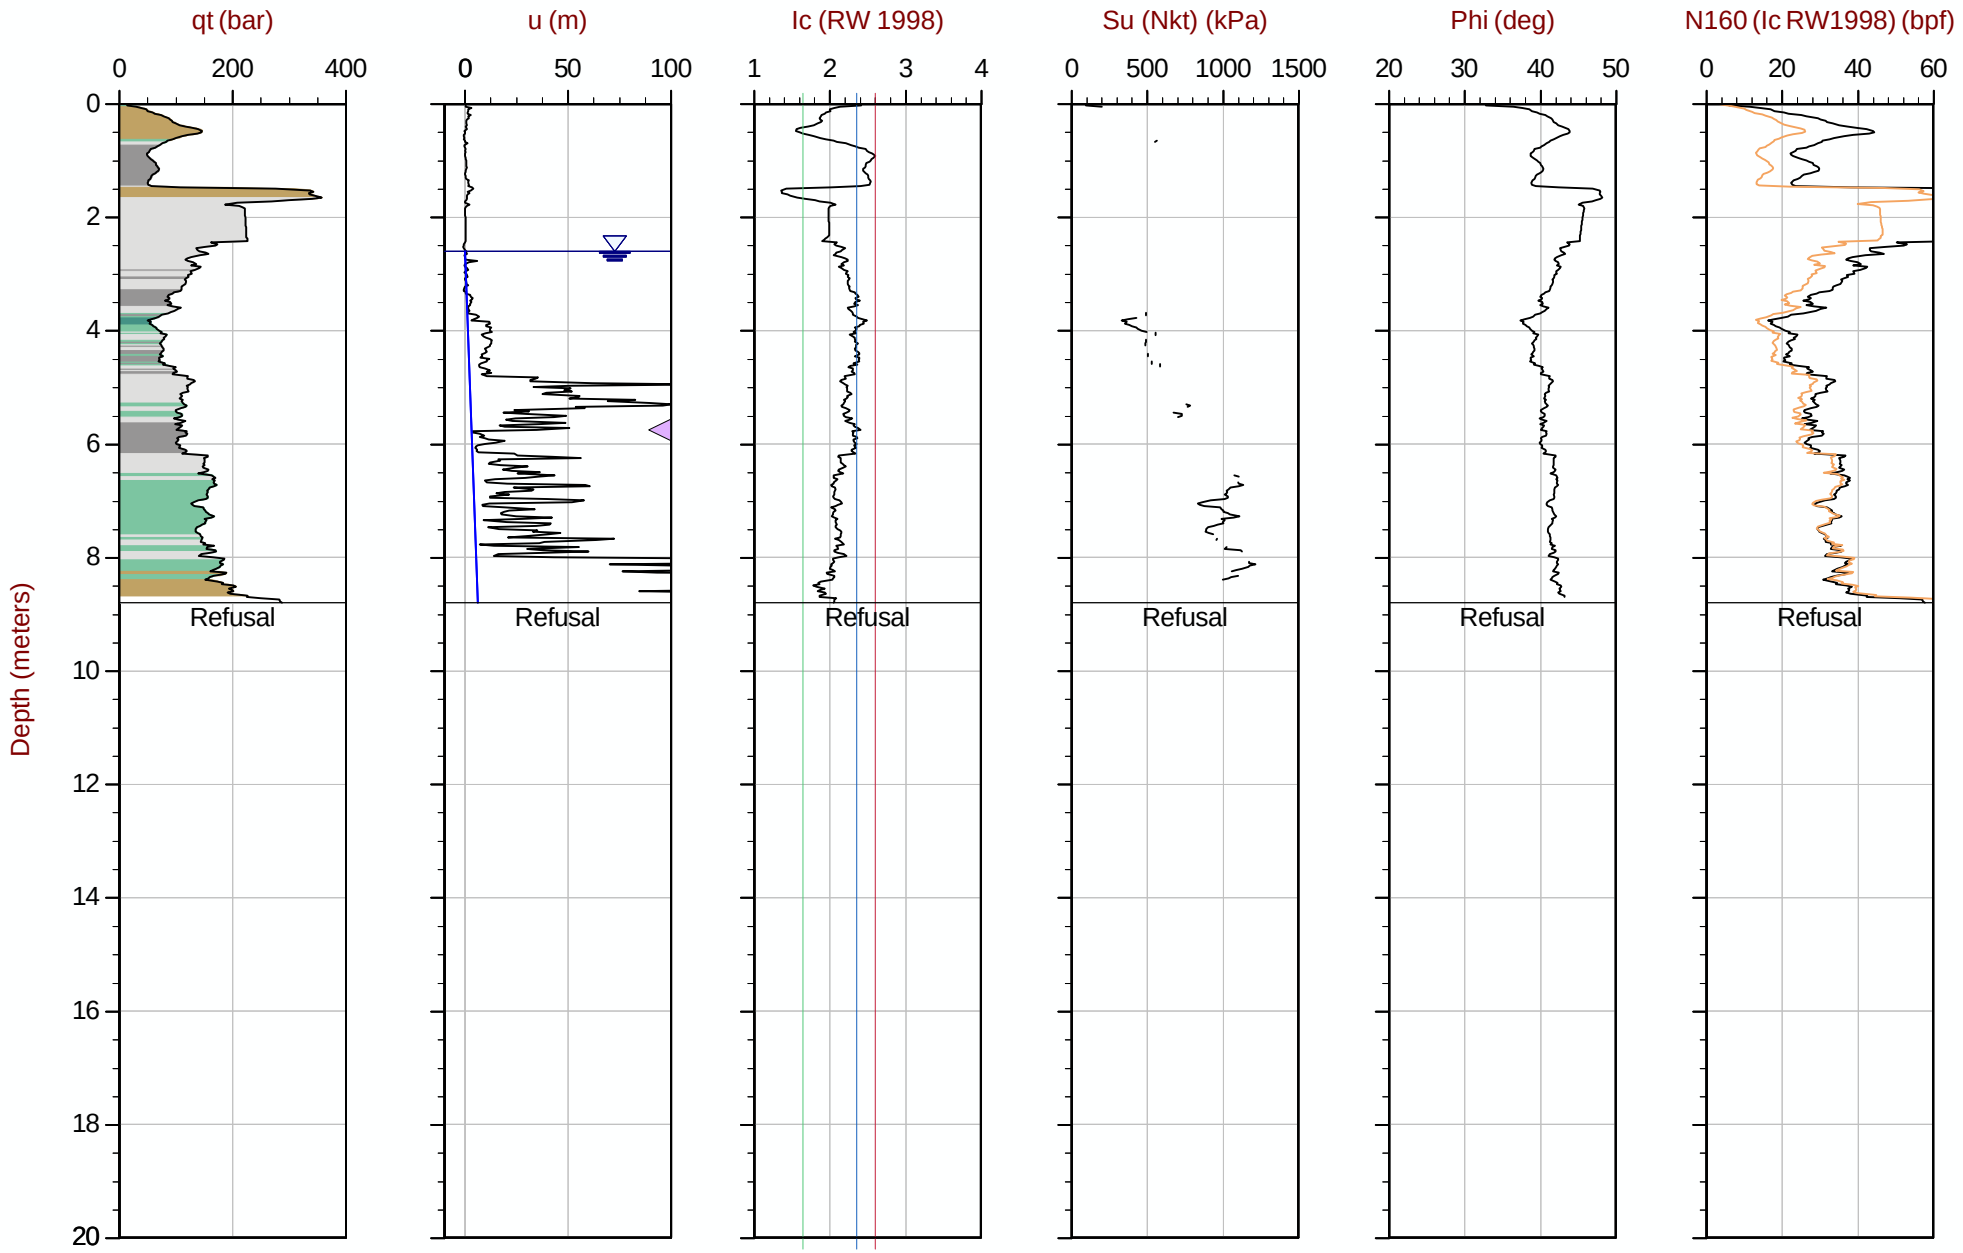

Max Depth: 8.800 m / 28.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT163.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612581m E: 415908m Elev: 769.201m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 15:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT164
Cone: 750:T1500F15U35 Area= 15cm2

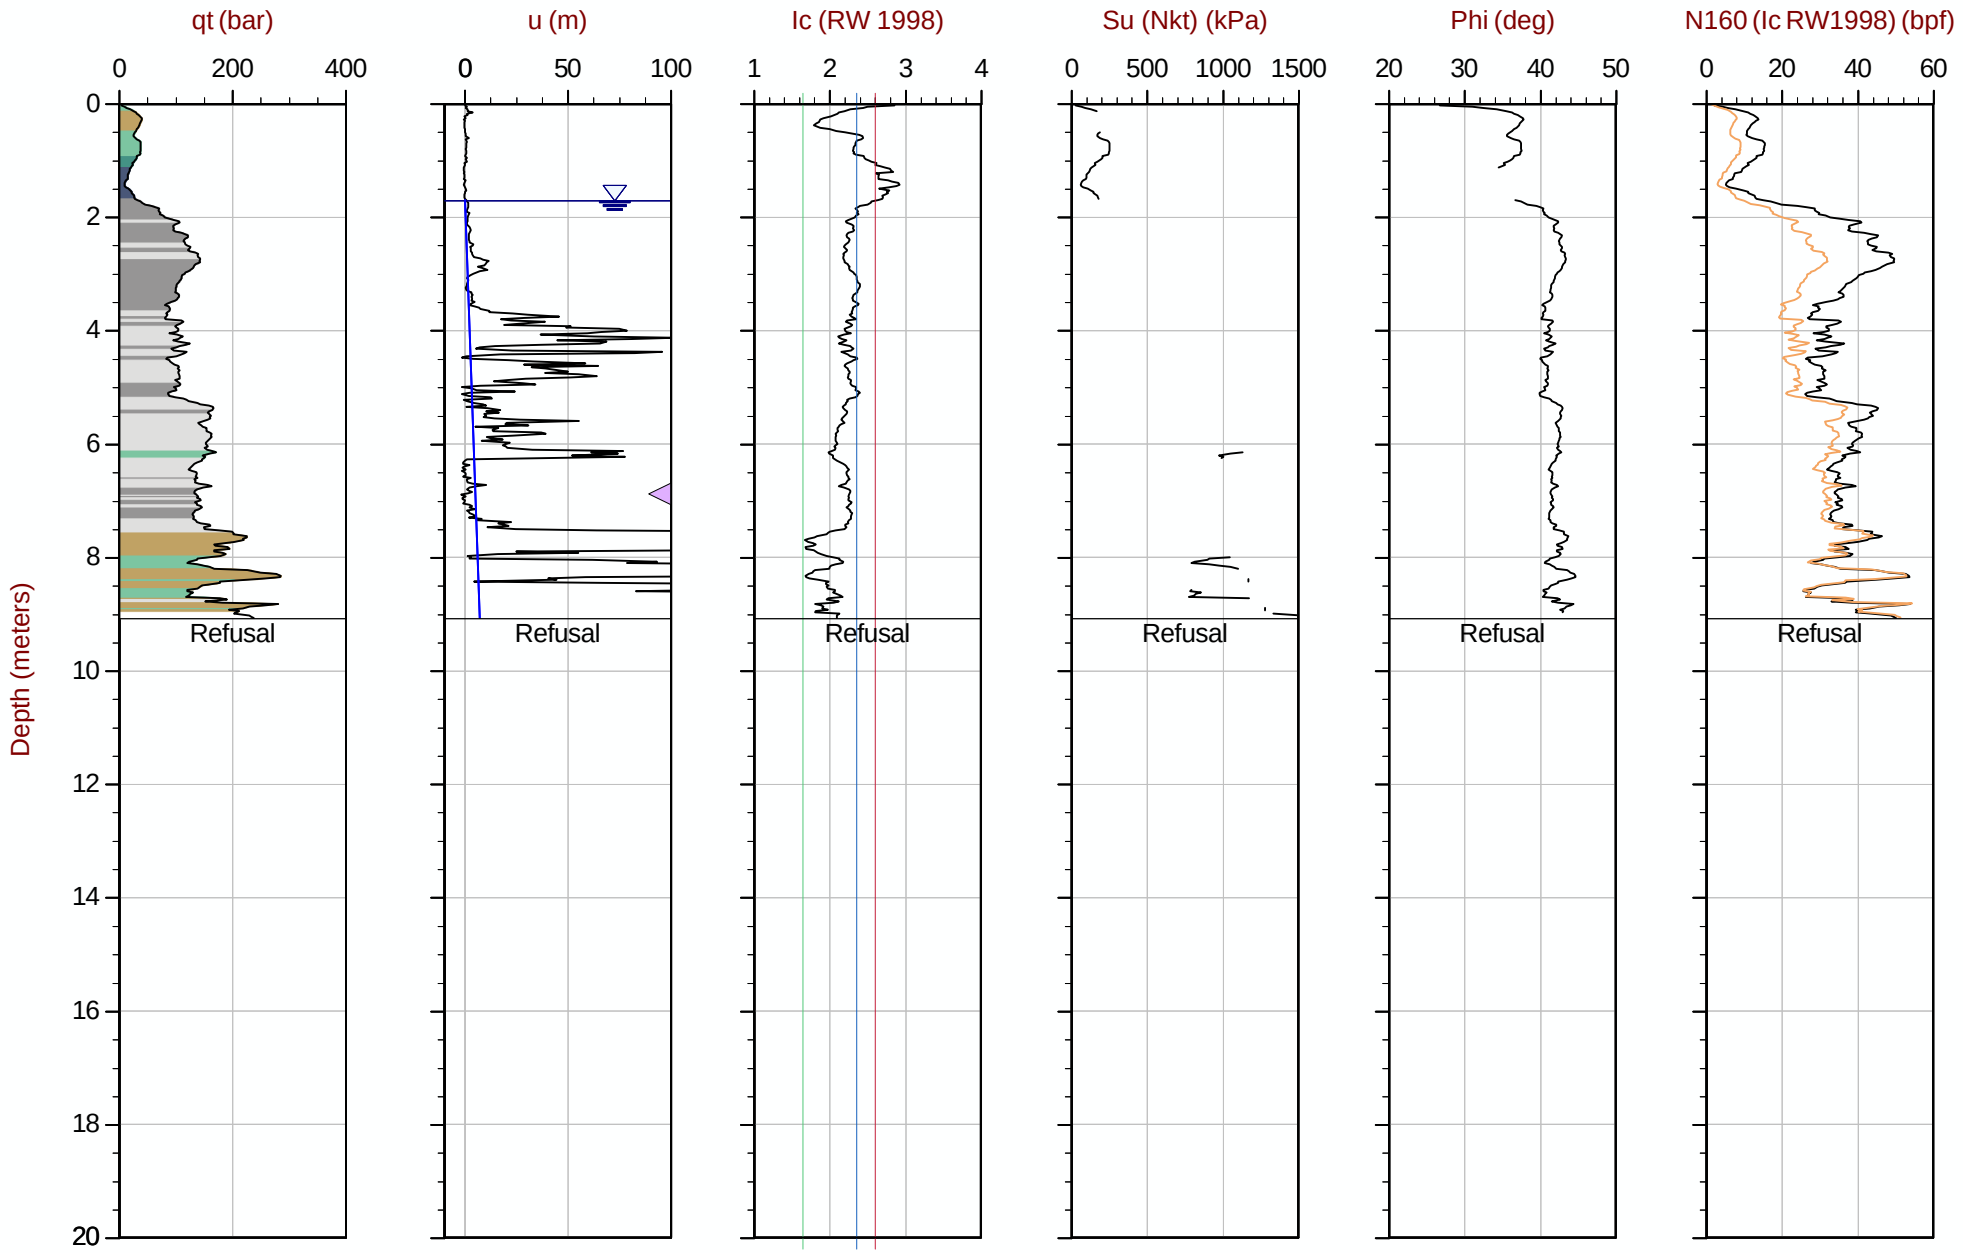

Max Depth: 9.075 m / 29.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT164.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612579m E: 416008m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 15:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT165
Cone: 821:T1000F10U35 Area= 15cm2

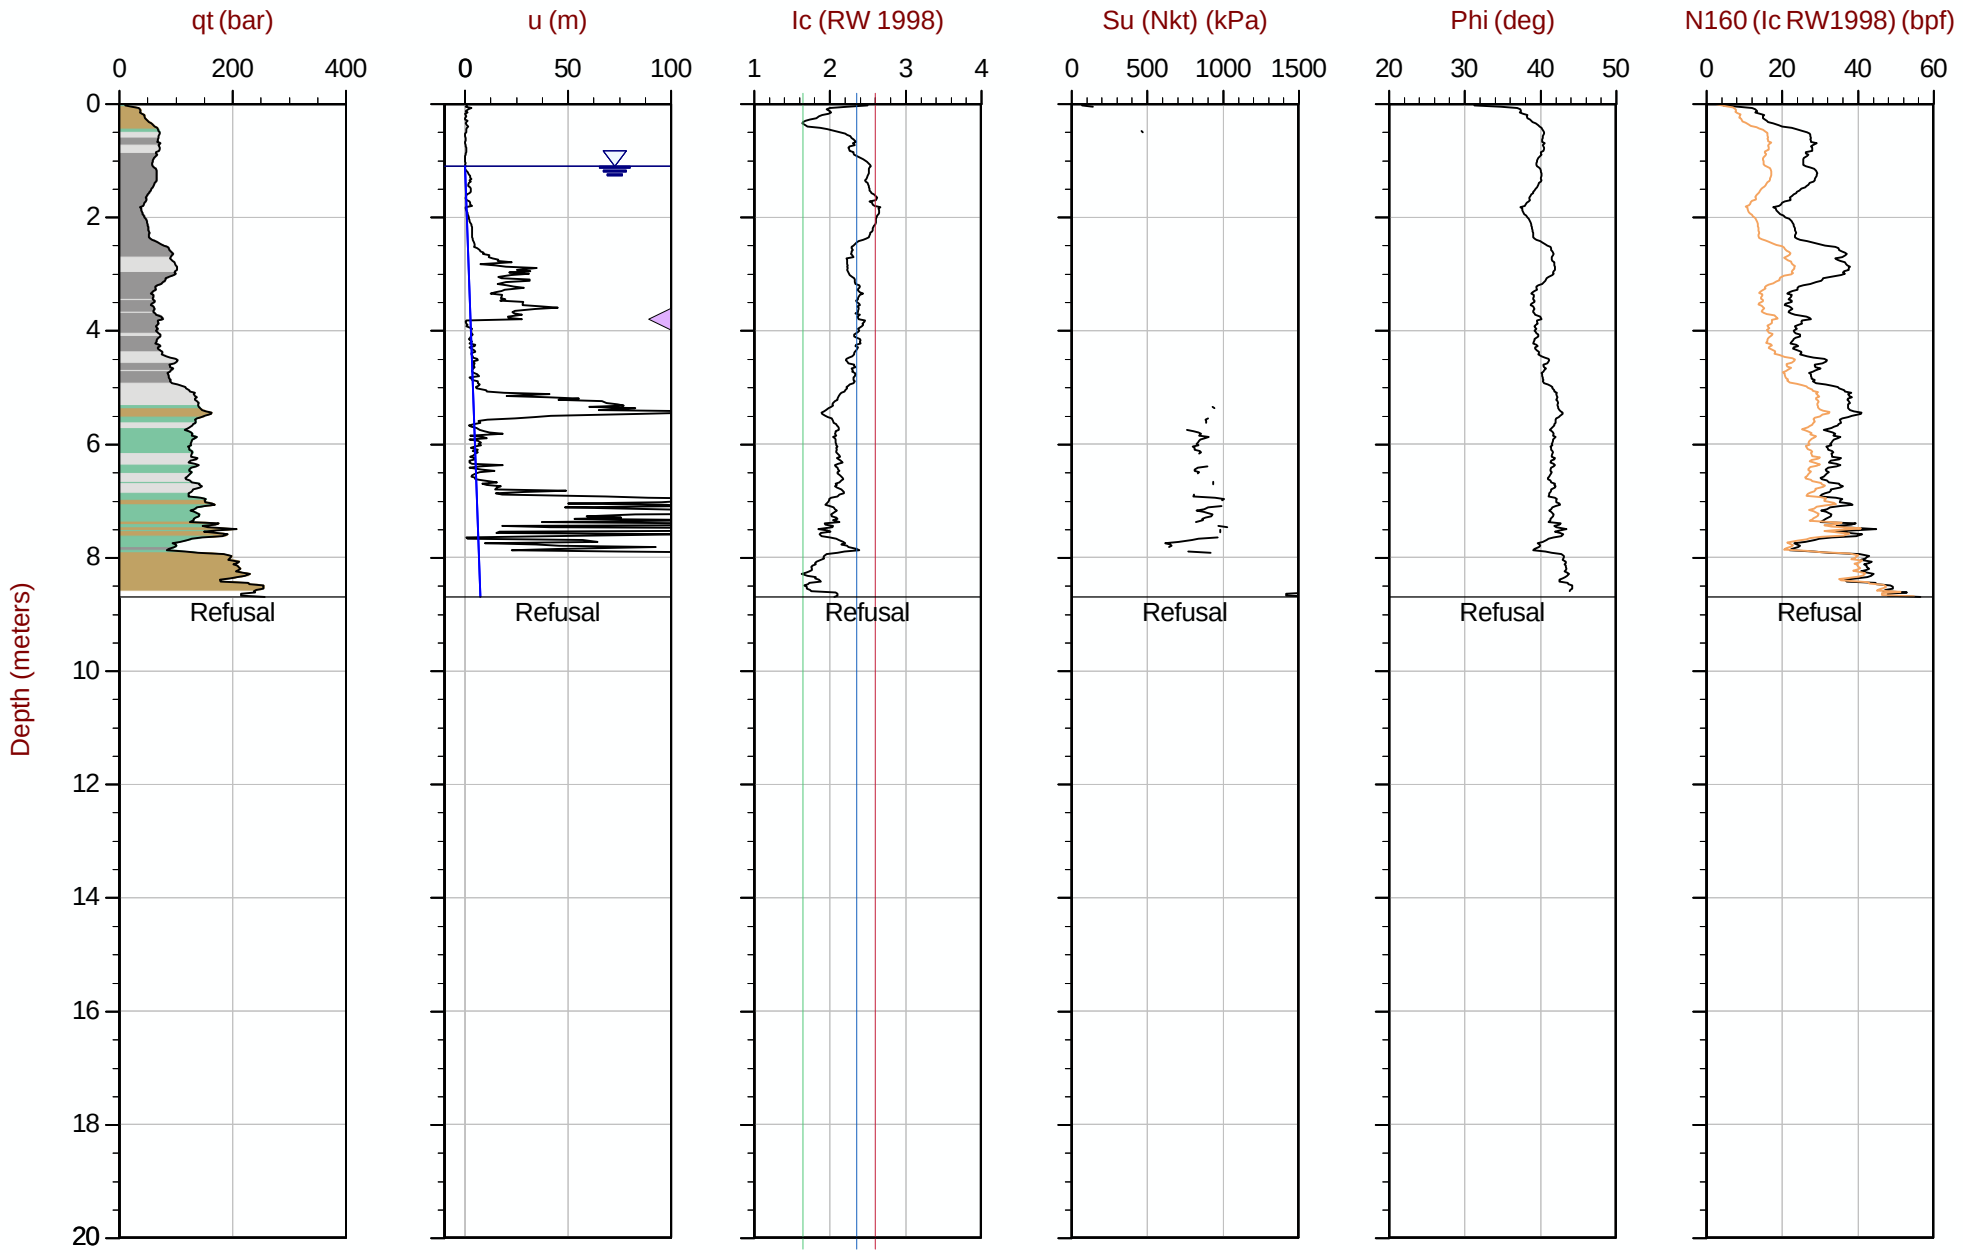

Max Depth: 8.700 m / 28.54 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT165.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612573m E: 416108m Elev: 769.874m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT166
Cone: 750:T1500F15U35 Area= 15cm2

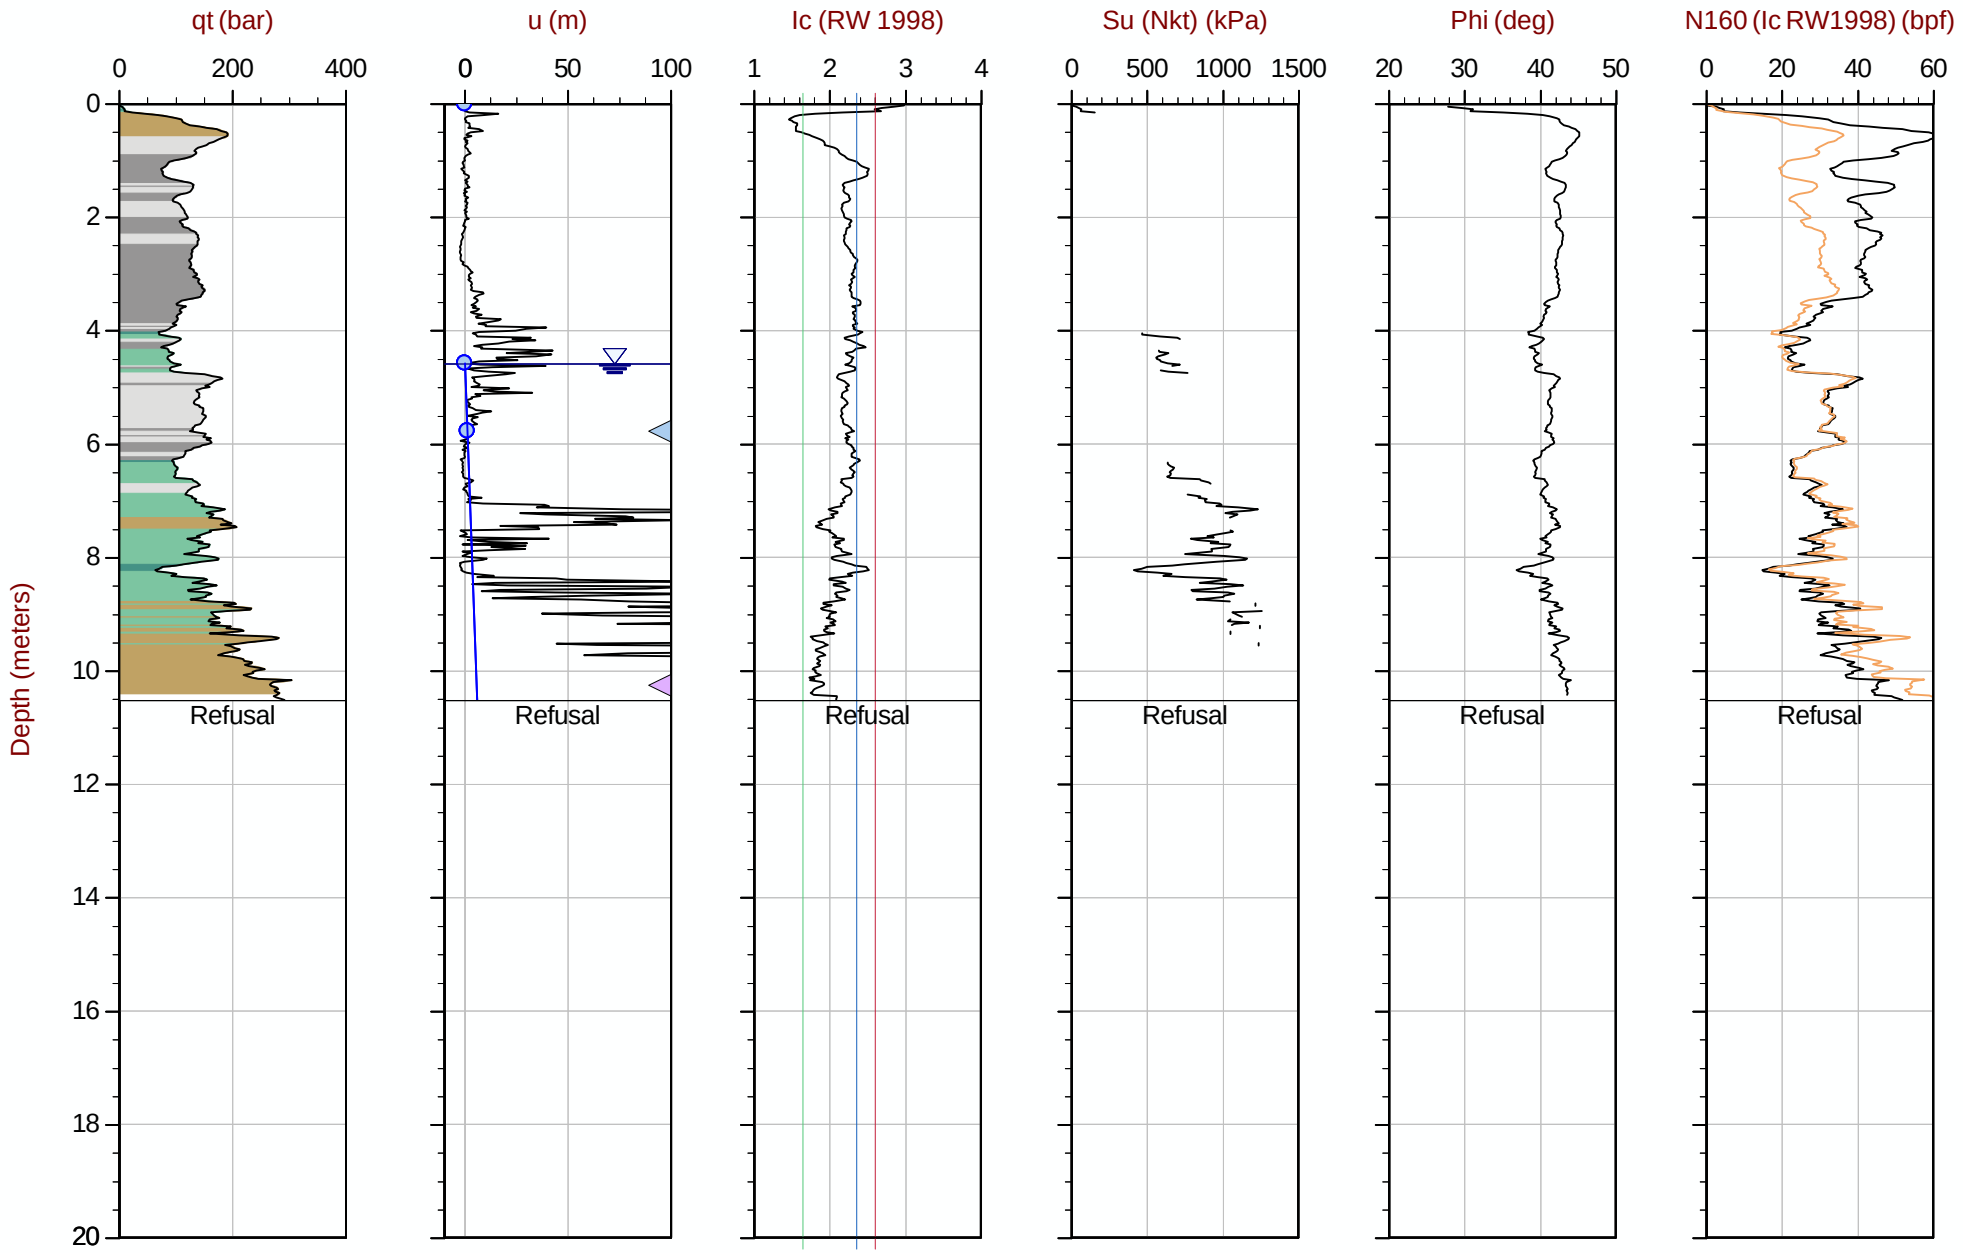

Max Depth: 10.525 m / 34.53 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT166.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612572m E: 416208m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 13:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT167
Cone: 854:T1500F15U35 Area= 15cm2

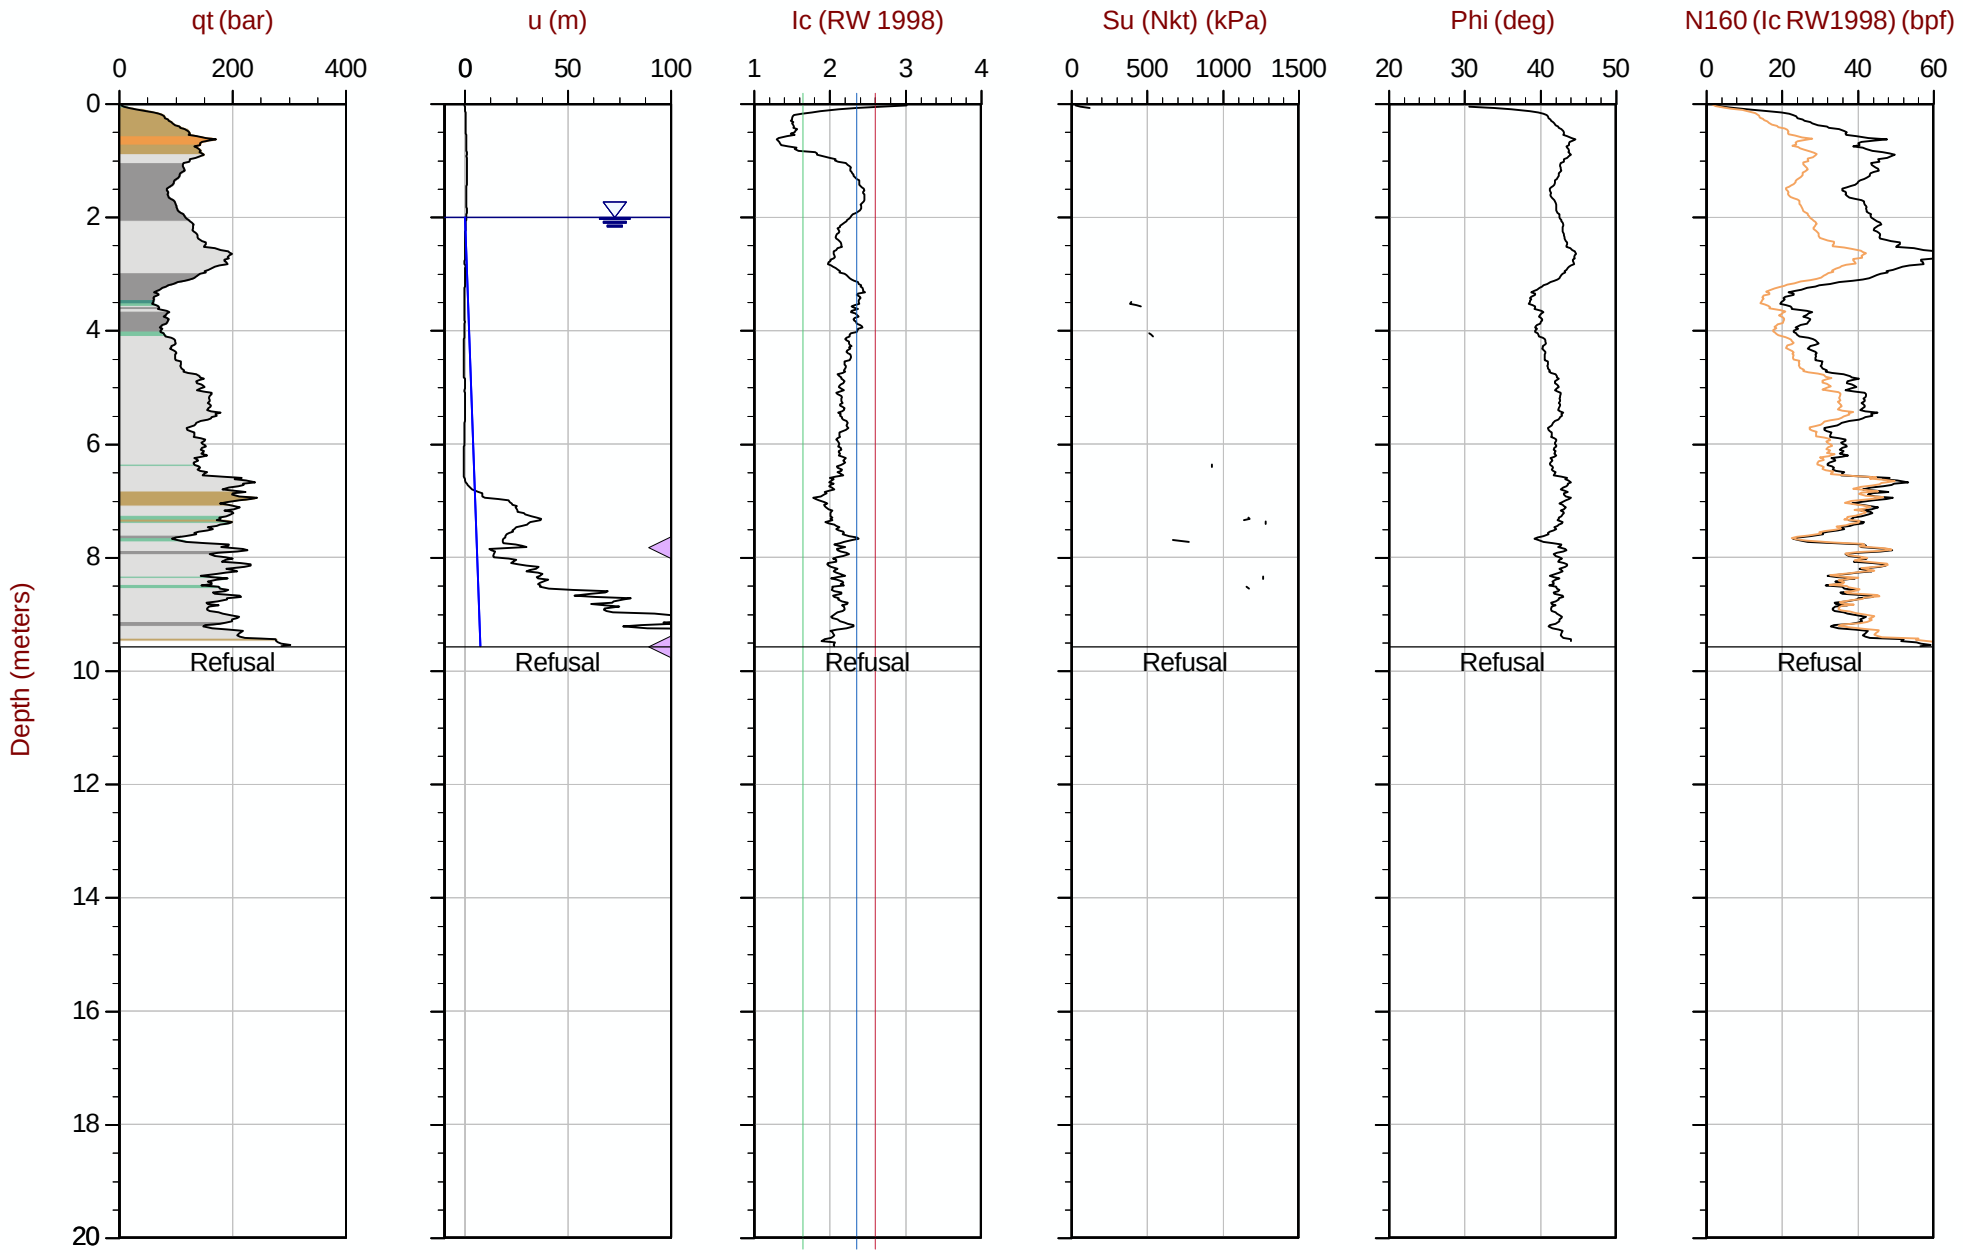

Max Depth: 9.575 m / 31.41 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT167.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612569m E: 416308m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 15:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT168
Cone: 854:T1500F15U35 Area= 15cm2

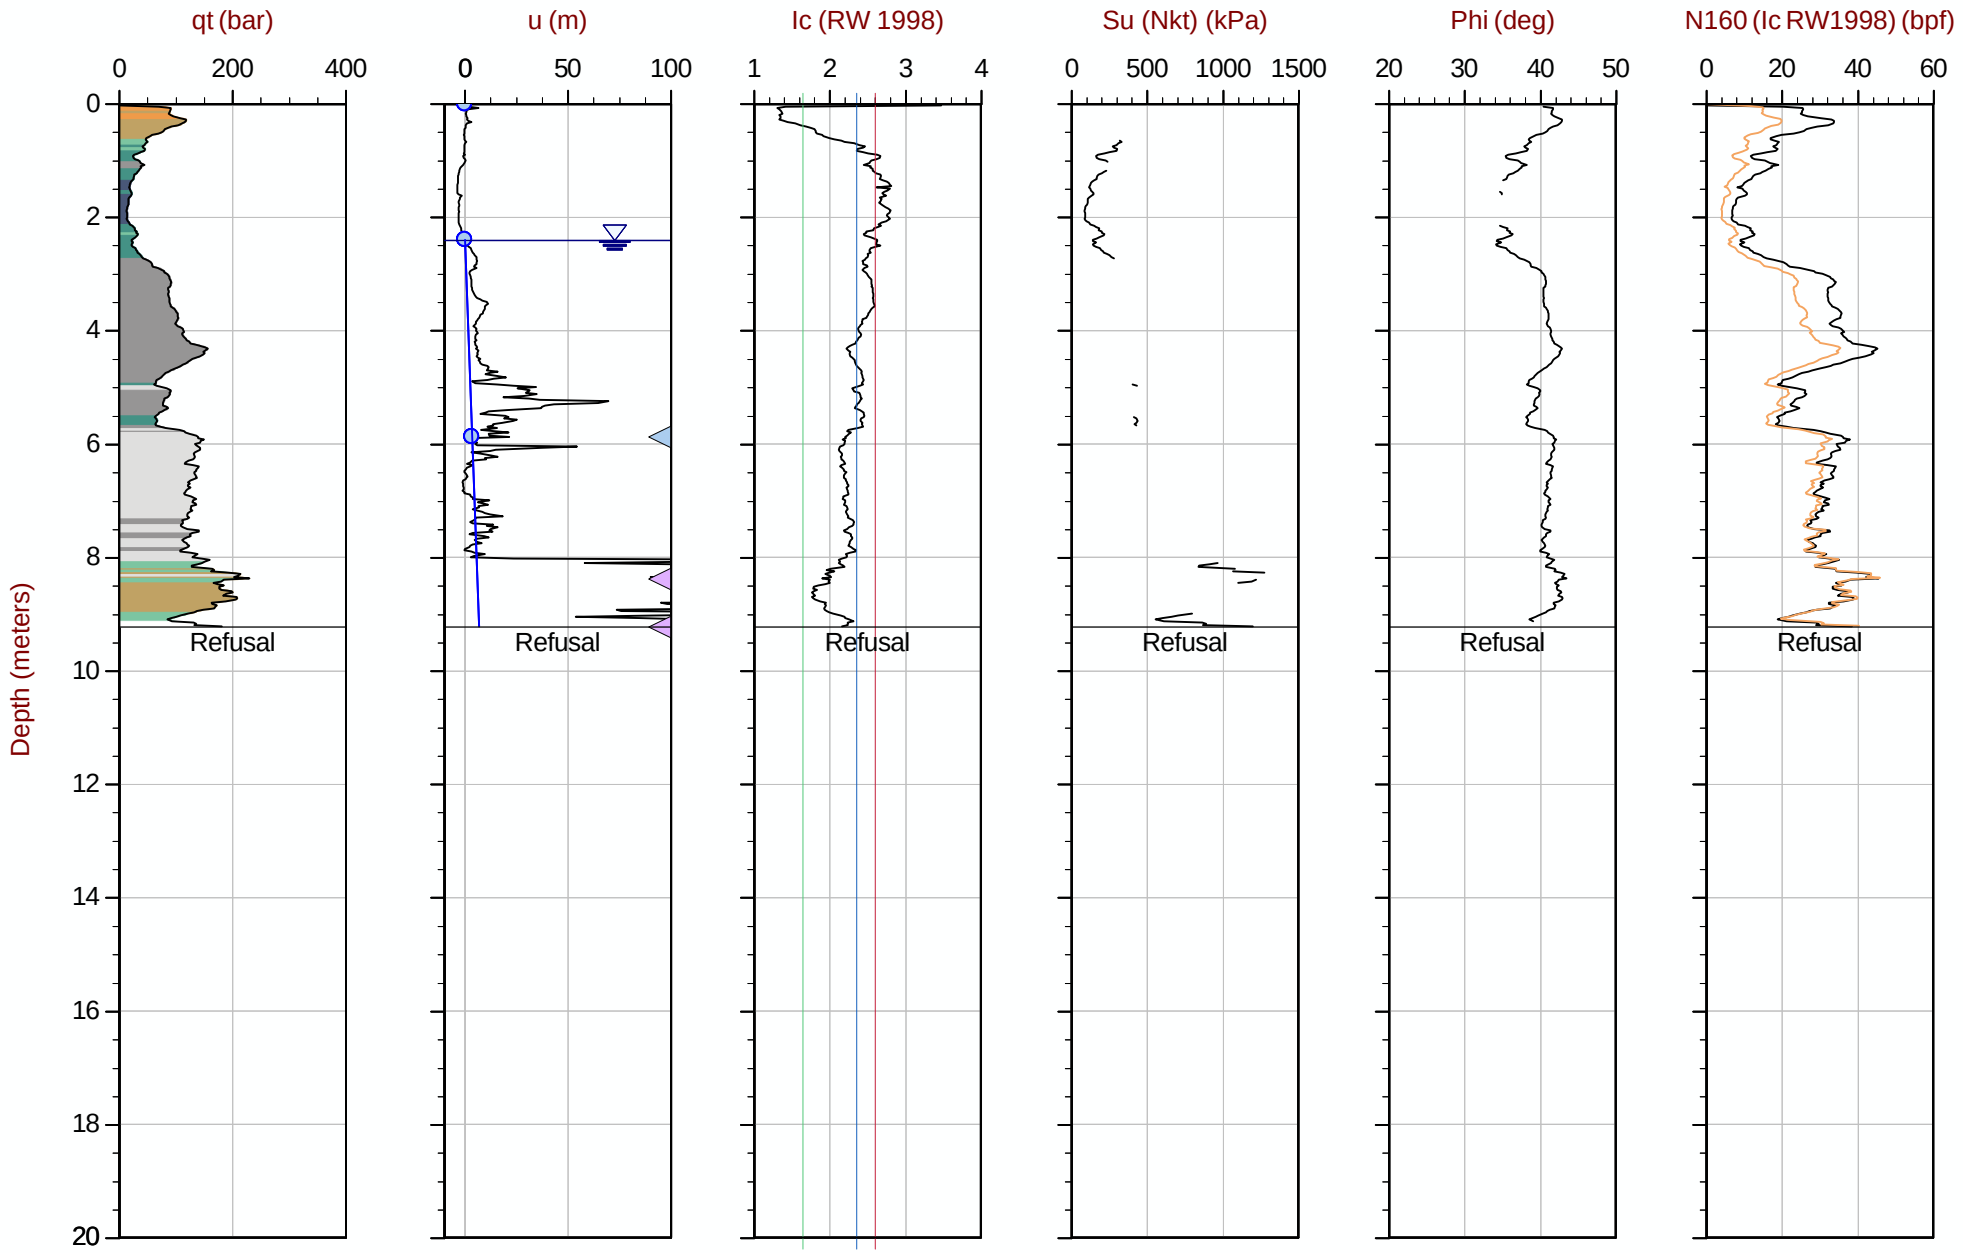

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT168.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612566m E: 416408m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 08:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT169
Cone: 854:T1500F15U35 Area= 15cm2

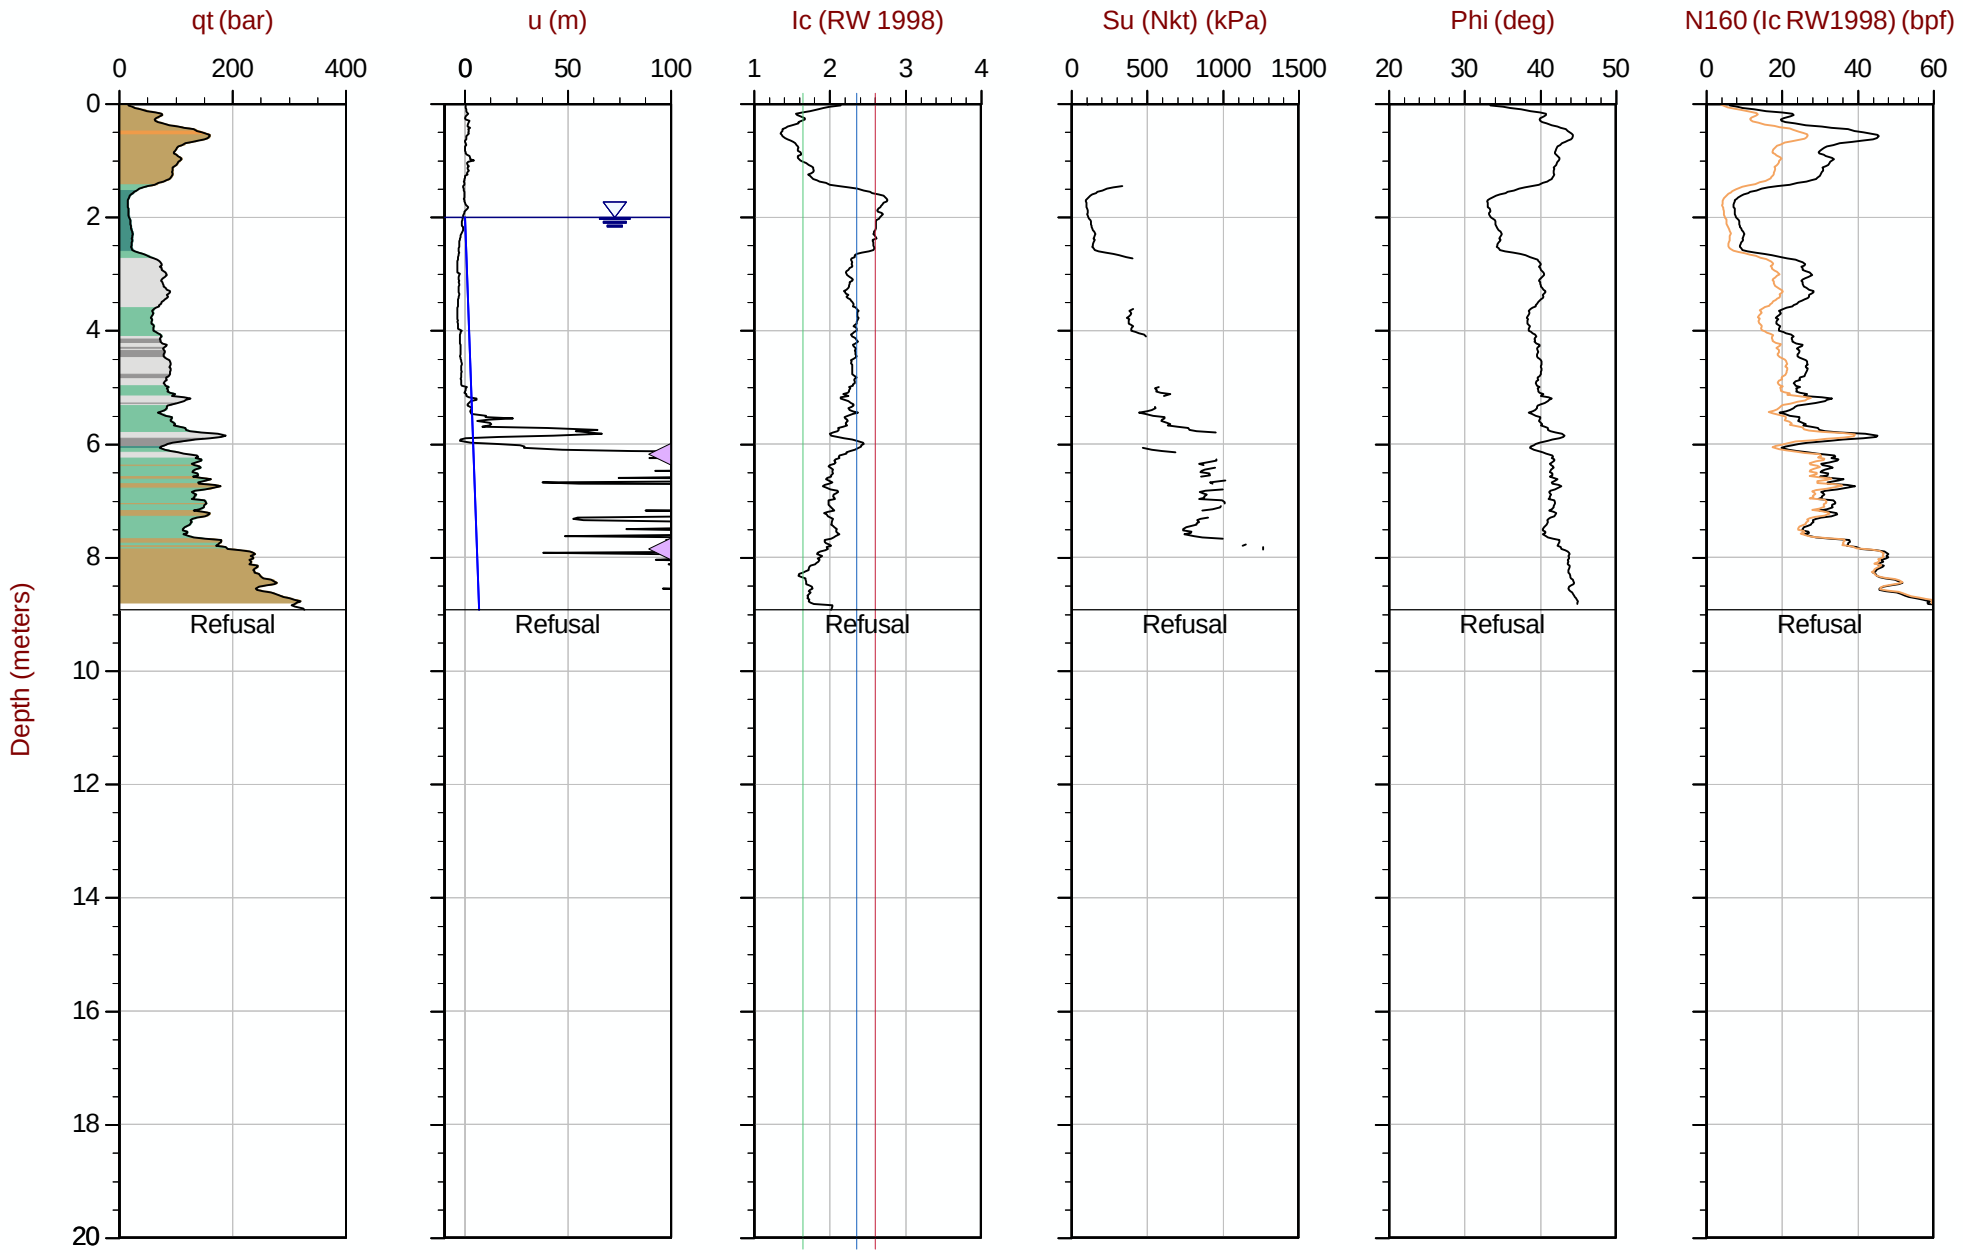

Max Depth: 8.925 m / 29.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT169.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612568m E: 416508m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 11:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT170
Cone: 854:T1500F15U35 Area= 15cm2

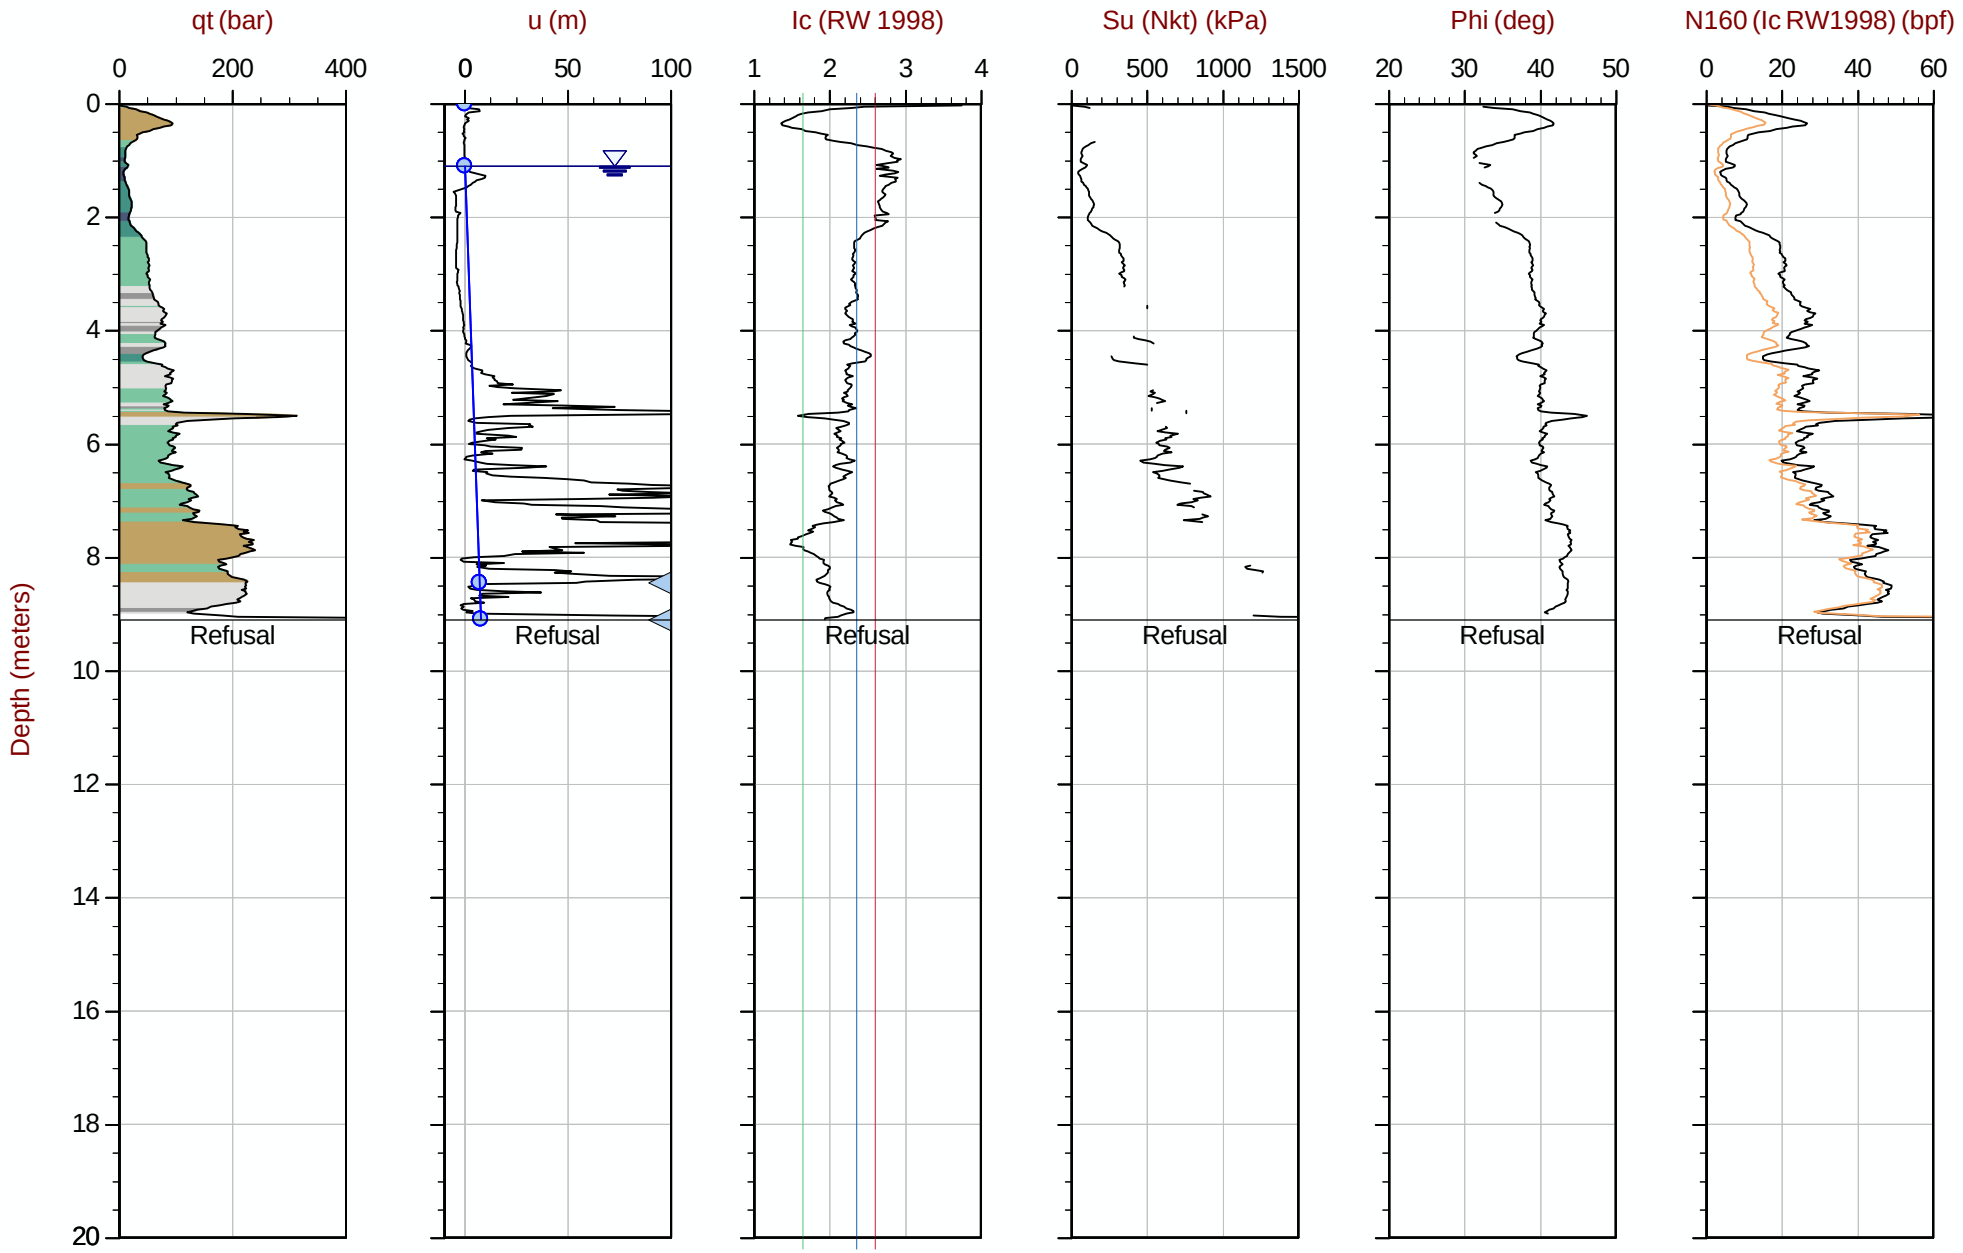

Max Depth: 9.100 m / 29.86 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT170.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612569m E: 416610m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 15:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT200
Cone: 854:T1500F15U35 Area= 15cm2

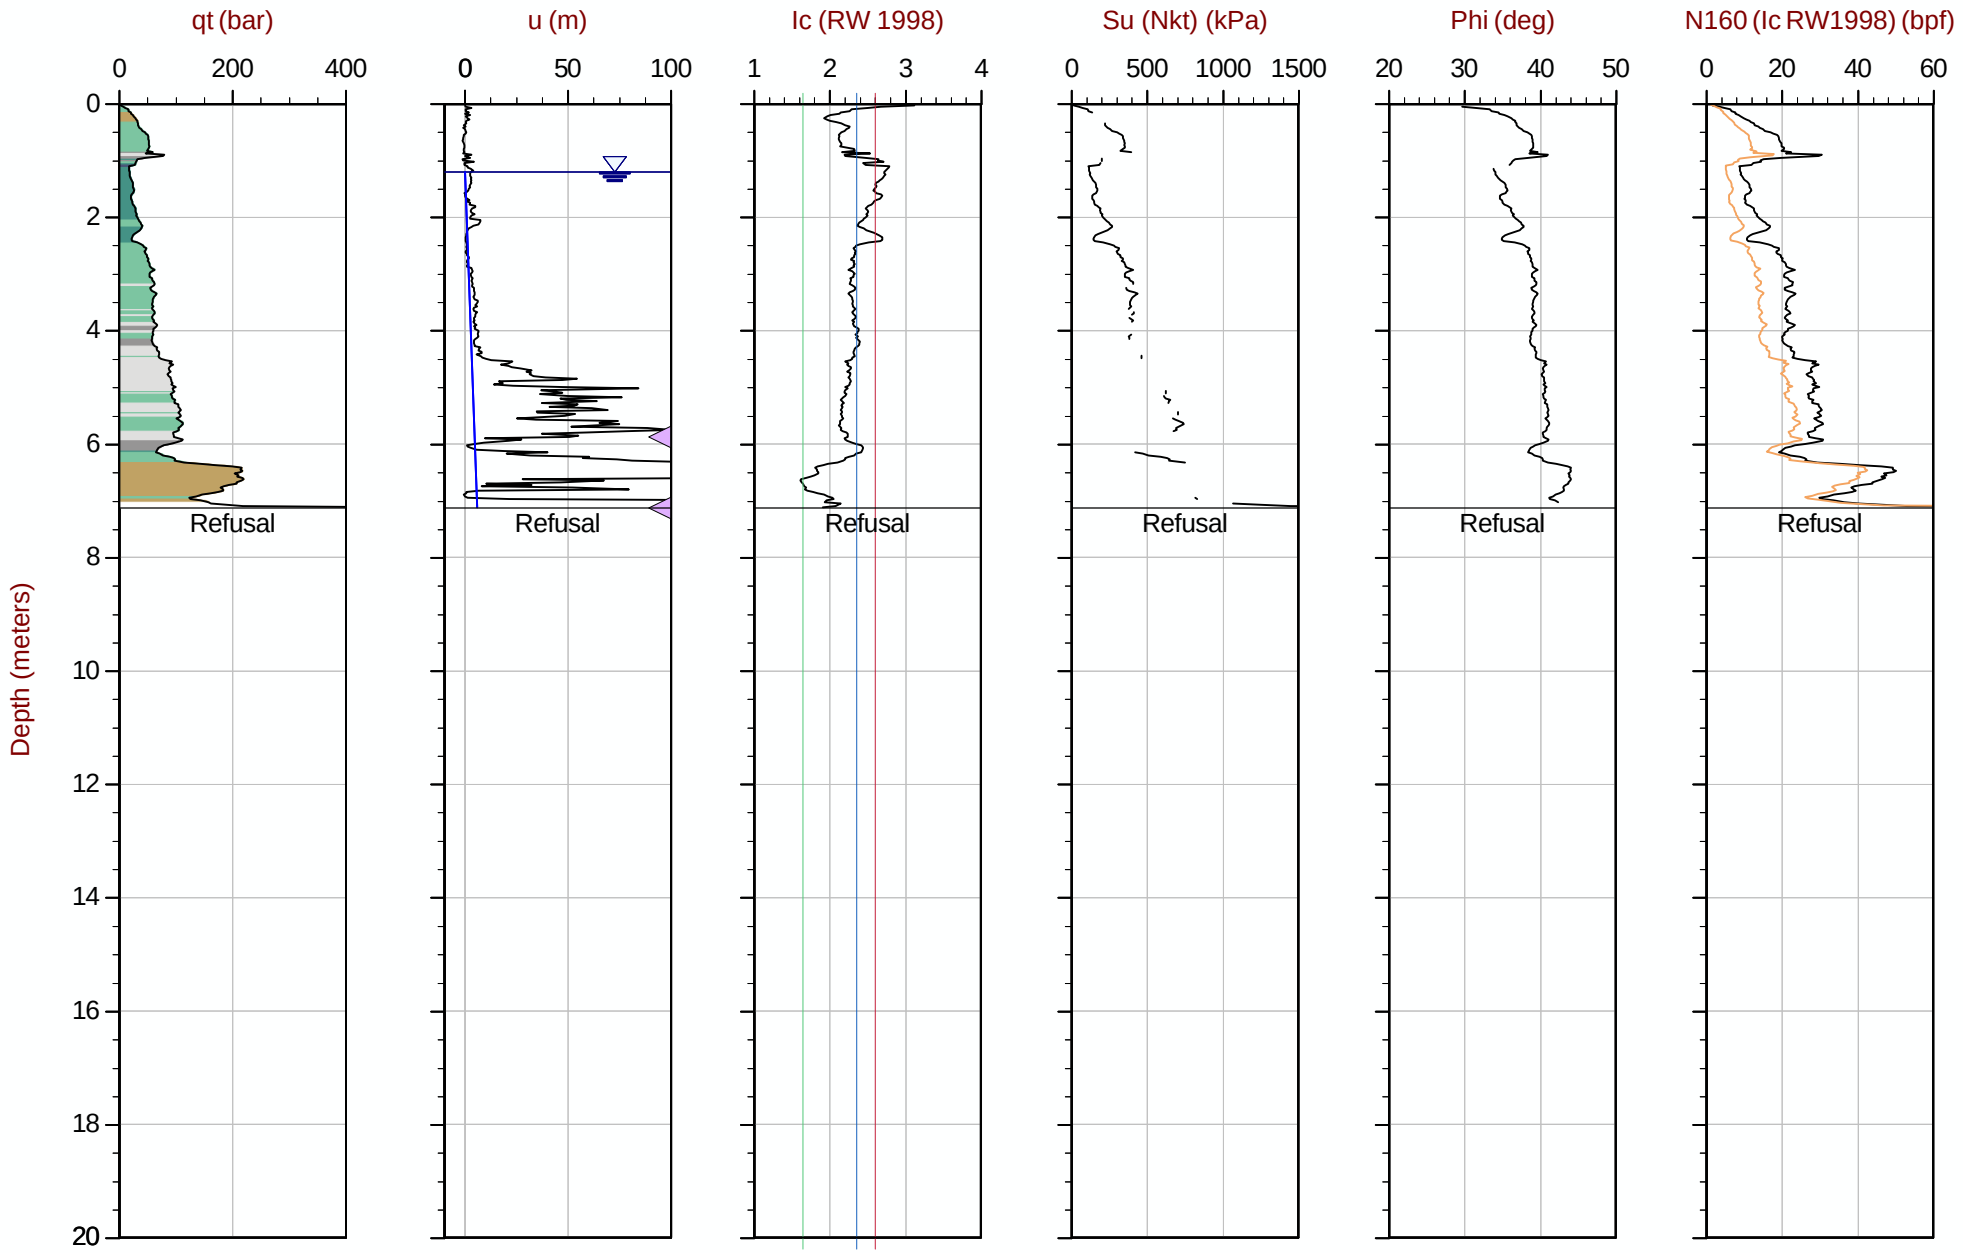

Max Depth: 7.125 m / 23.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT200.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612486m E: 416722m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 16:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT201
Cone: 854:T1500F15U35 Area= 15cm2

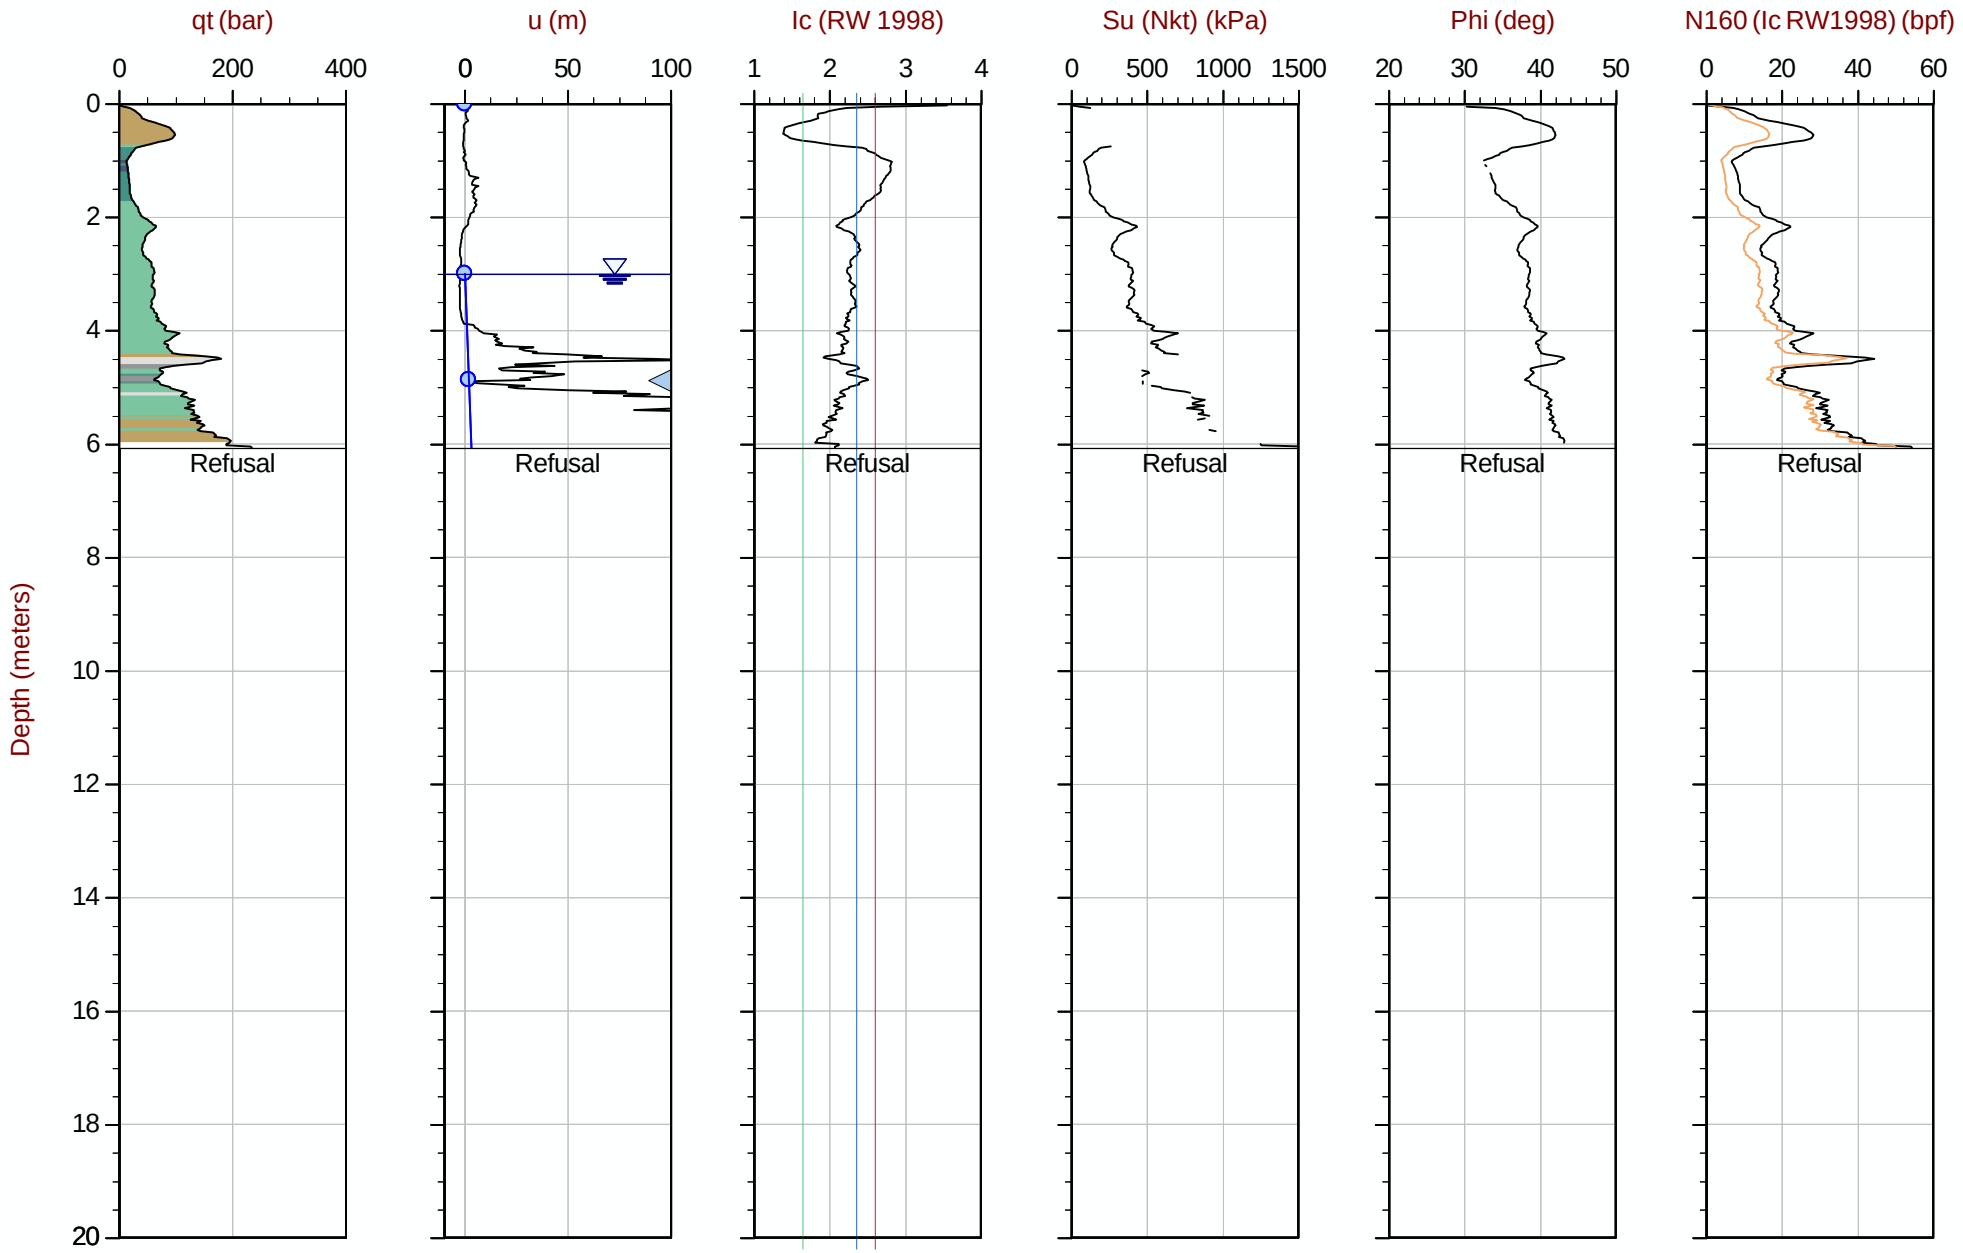

Max Depth: 6.075 m / 19.93 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT201.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612454m E: 416772m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 07:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT202
Cone: 854:T1500F15U35 Area= 15cm2

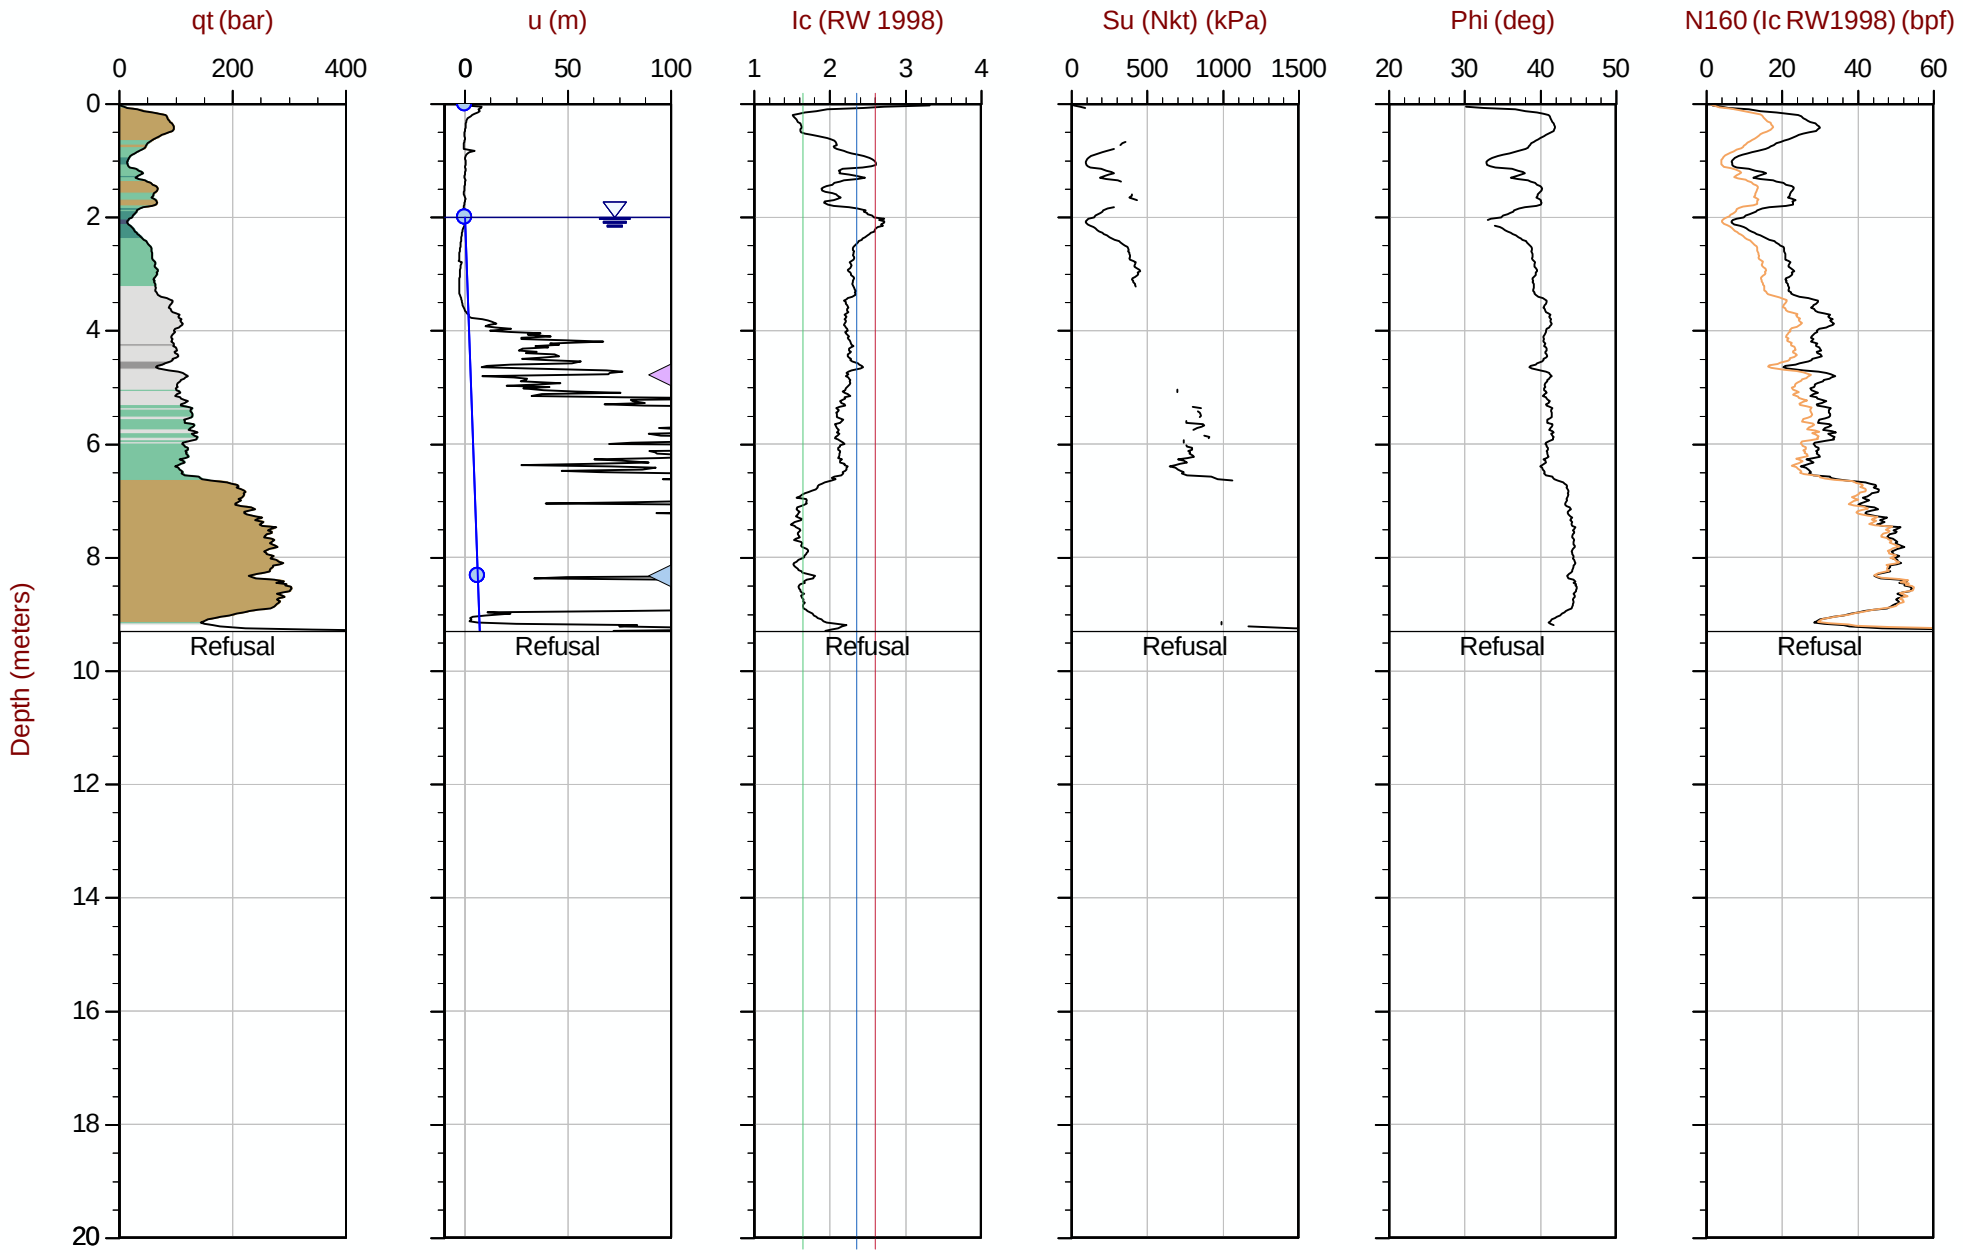

Max Depth: 9.300 m / 30.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT202.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612420m E: 416809m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 08:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT203
Cone: 854:T1500F15U35 Area= 15cm2

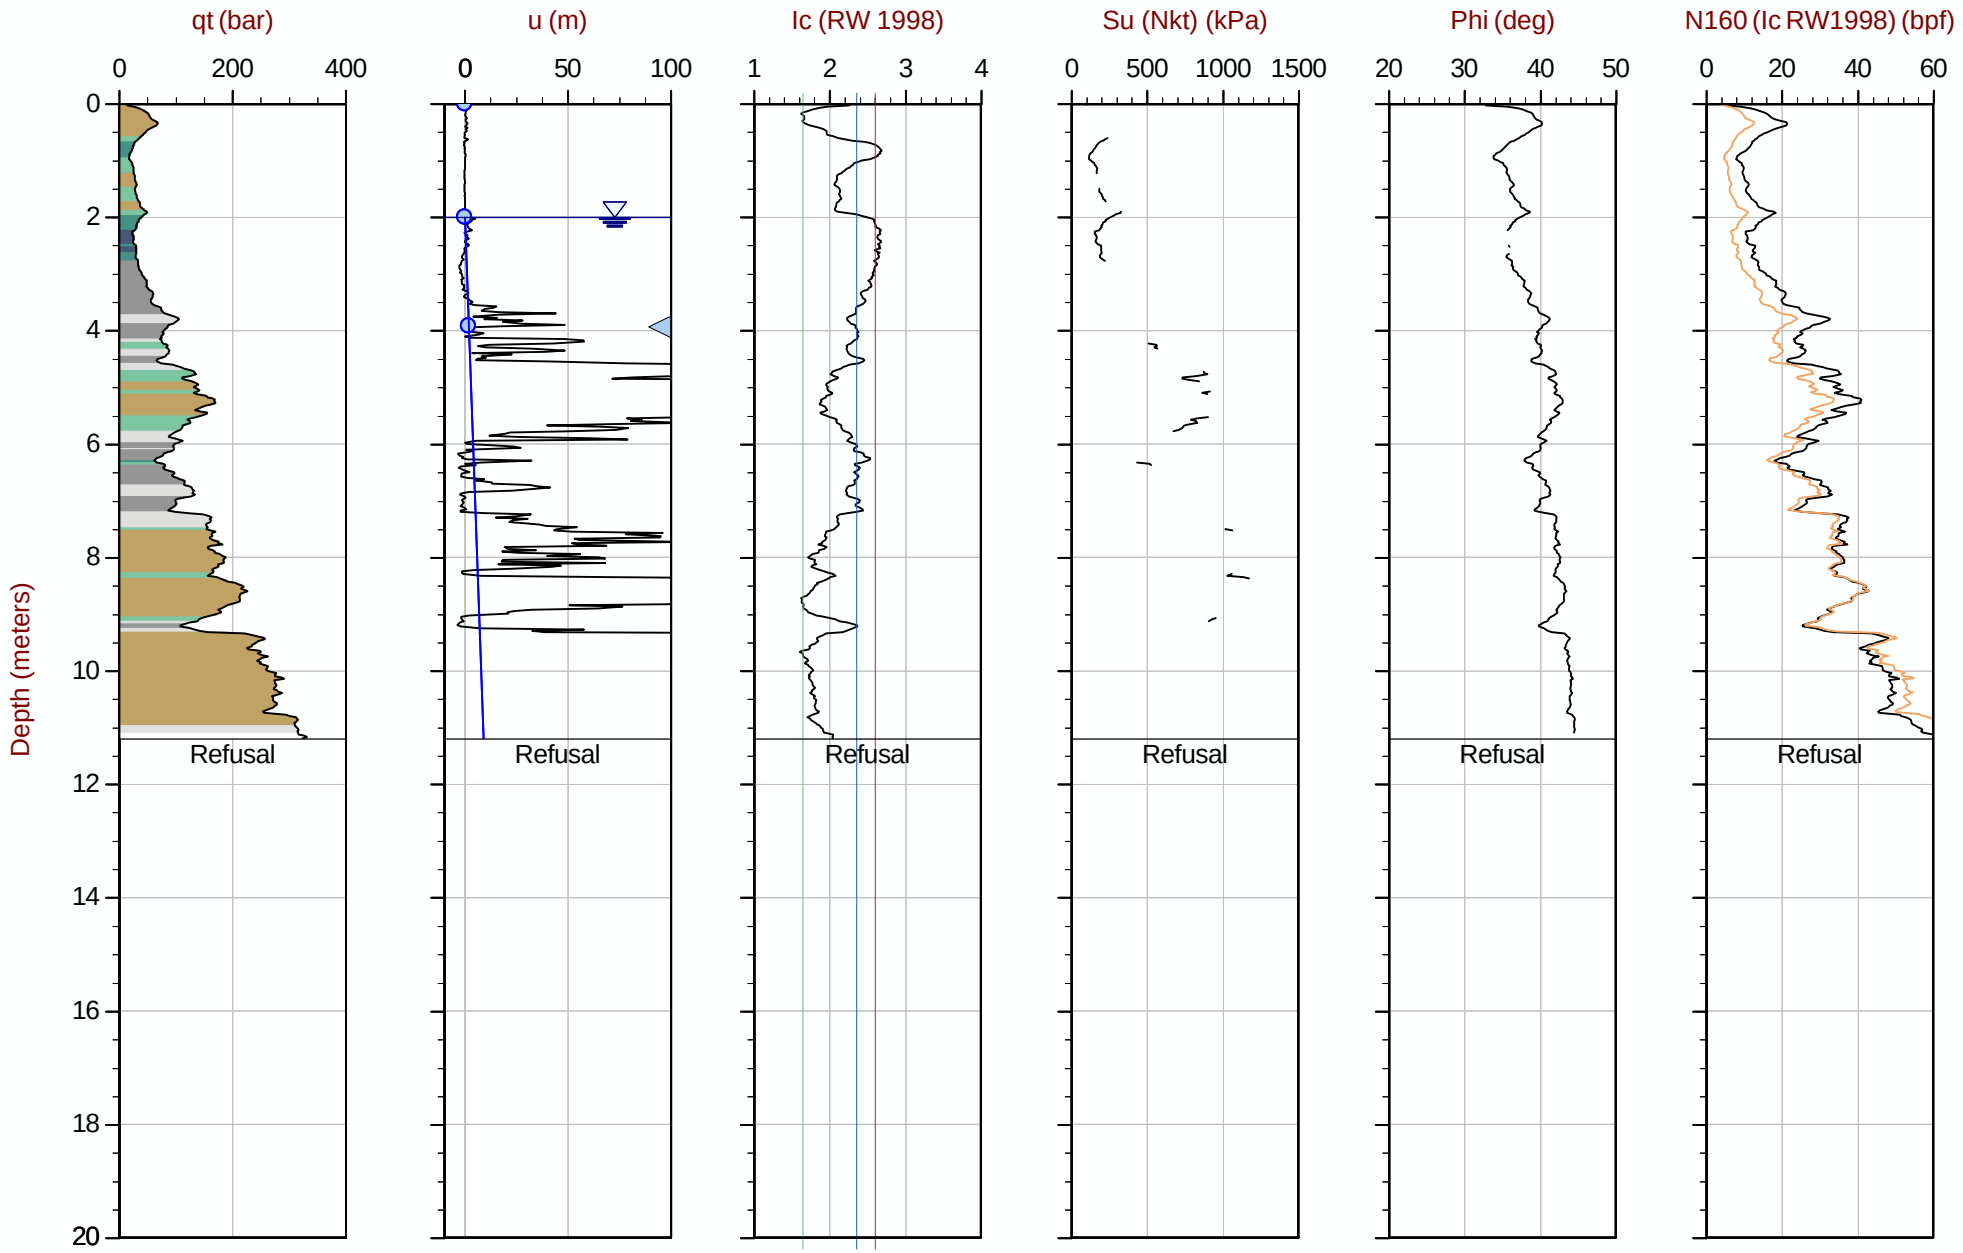

Max Depth: 11.200 m / 36.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT203.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612375m E: 416842m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 09:40
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT204
Cone: 854:T1500F15U35 Area= 15cm2

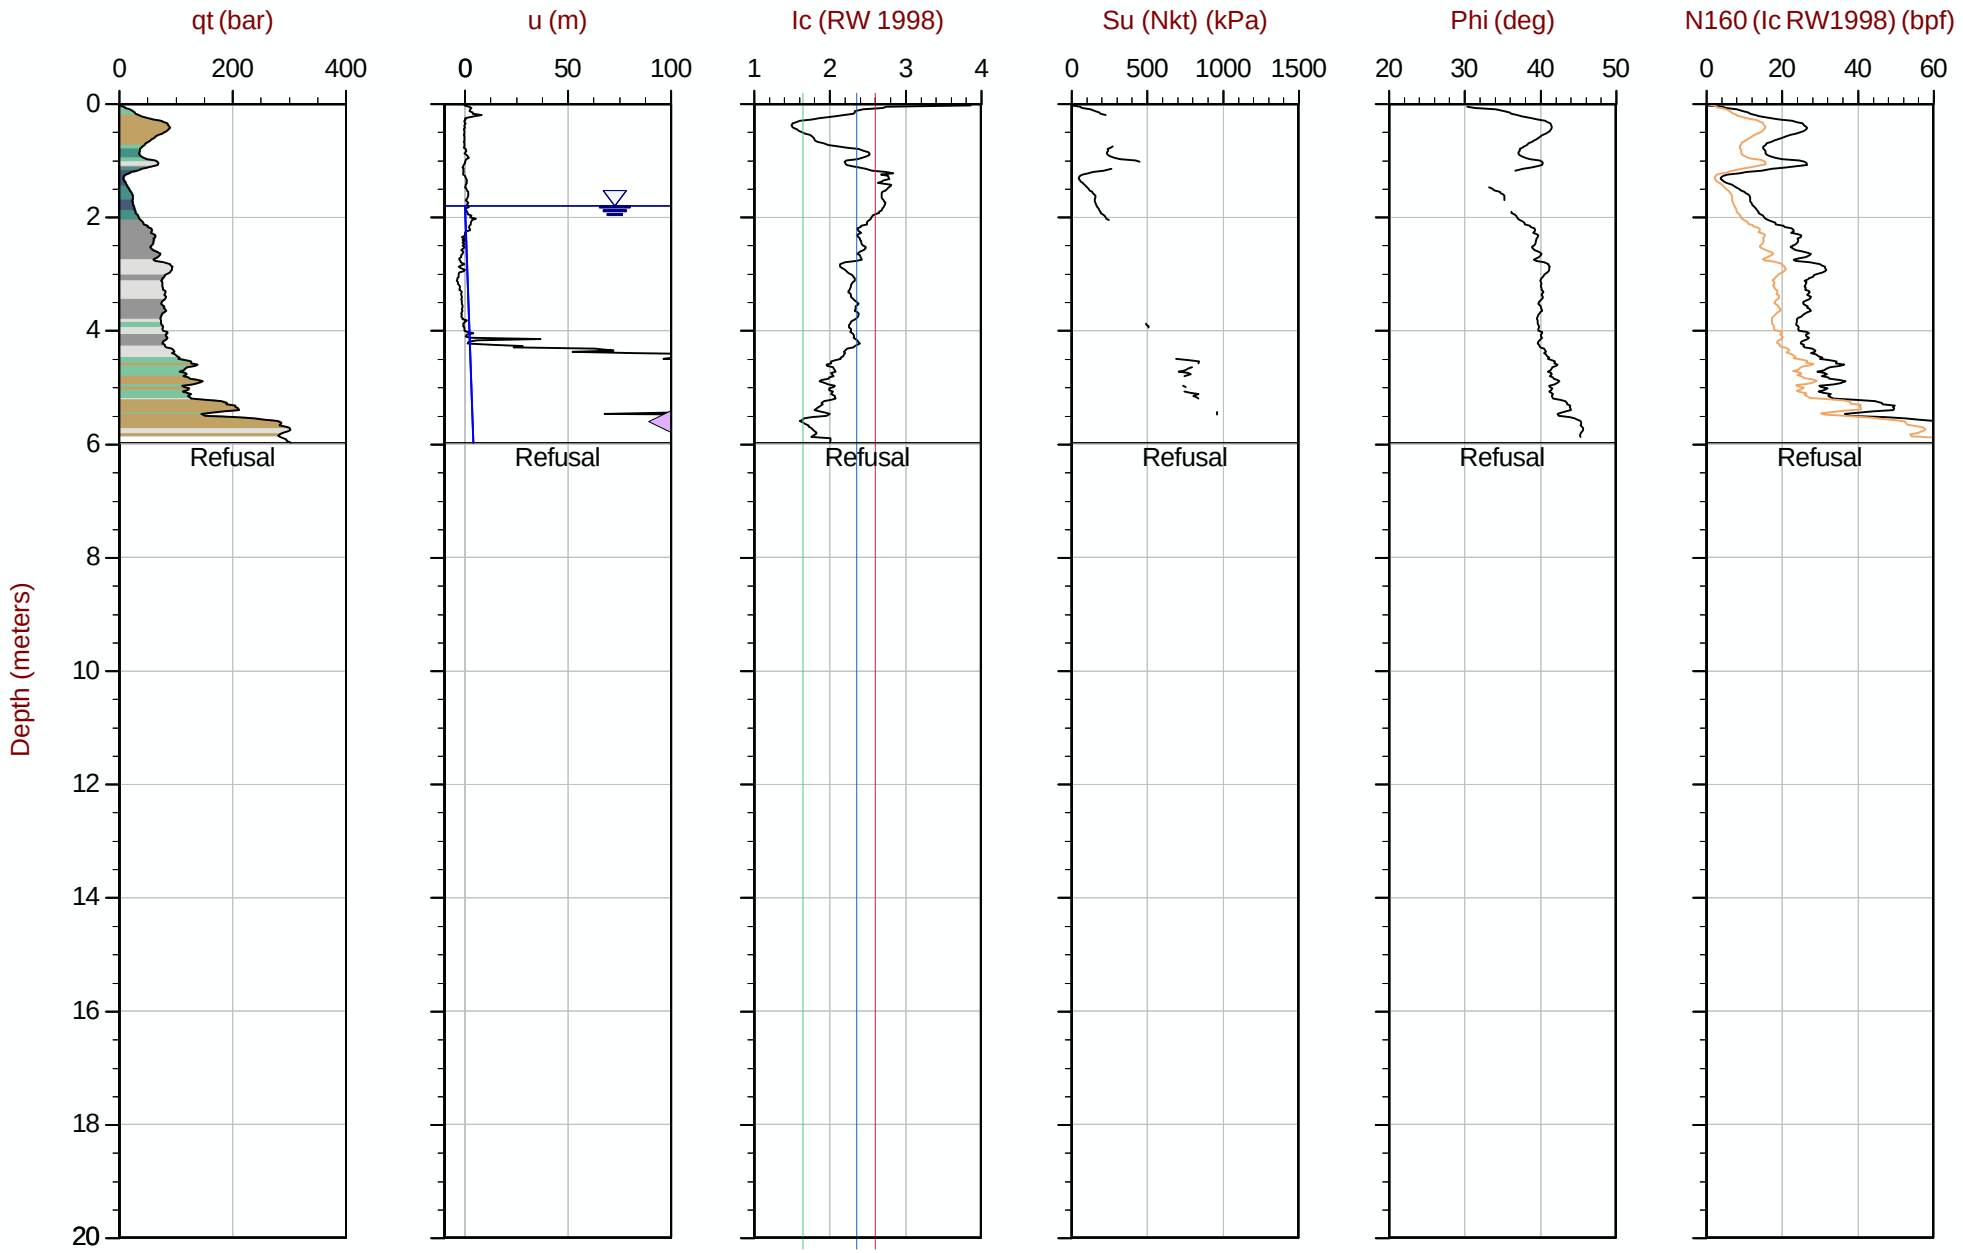

Max Depth: 5.975 m / 19.60 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT204.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612318m E: 416870m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 10:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT205
Cone: 854:T1500F15U35 Area= 15cm2

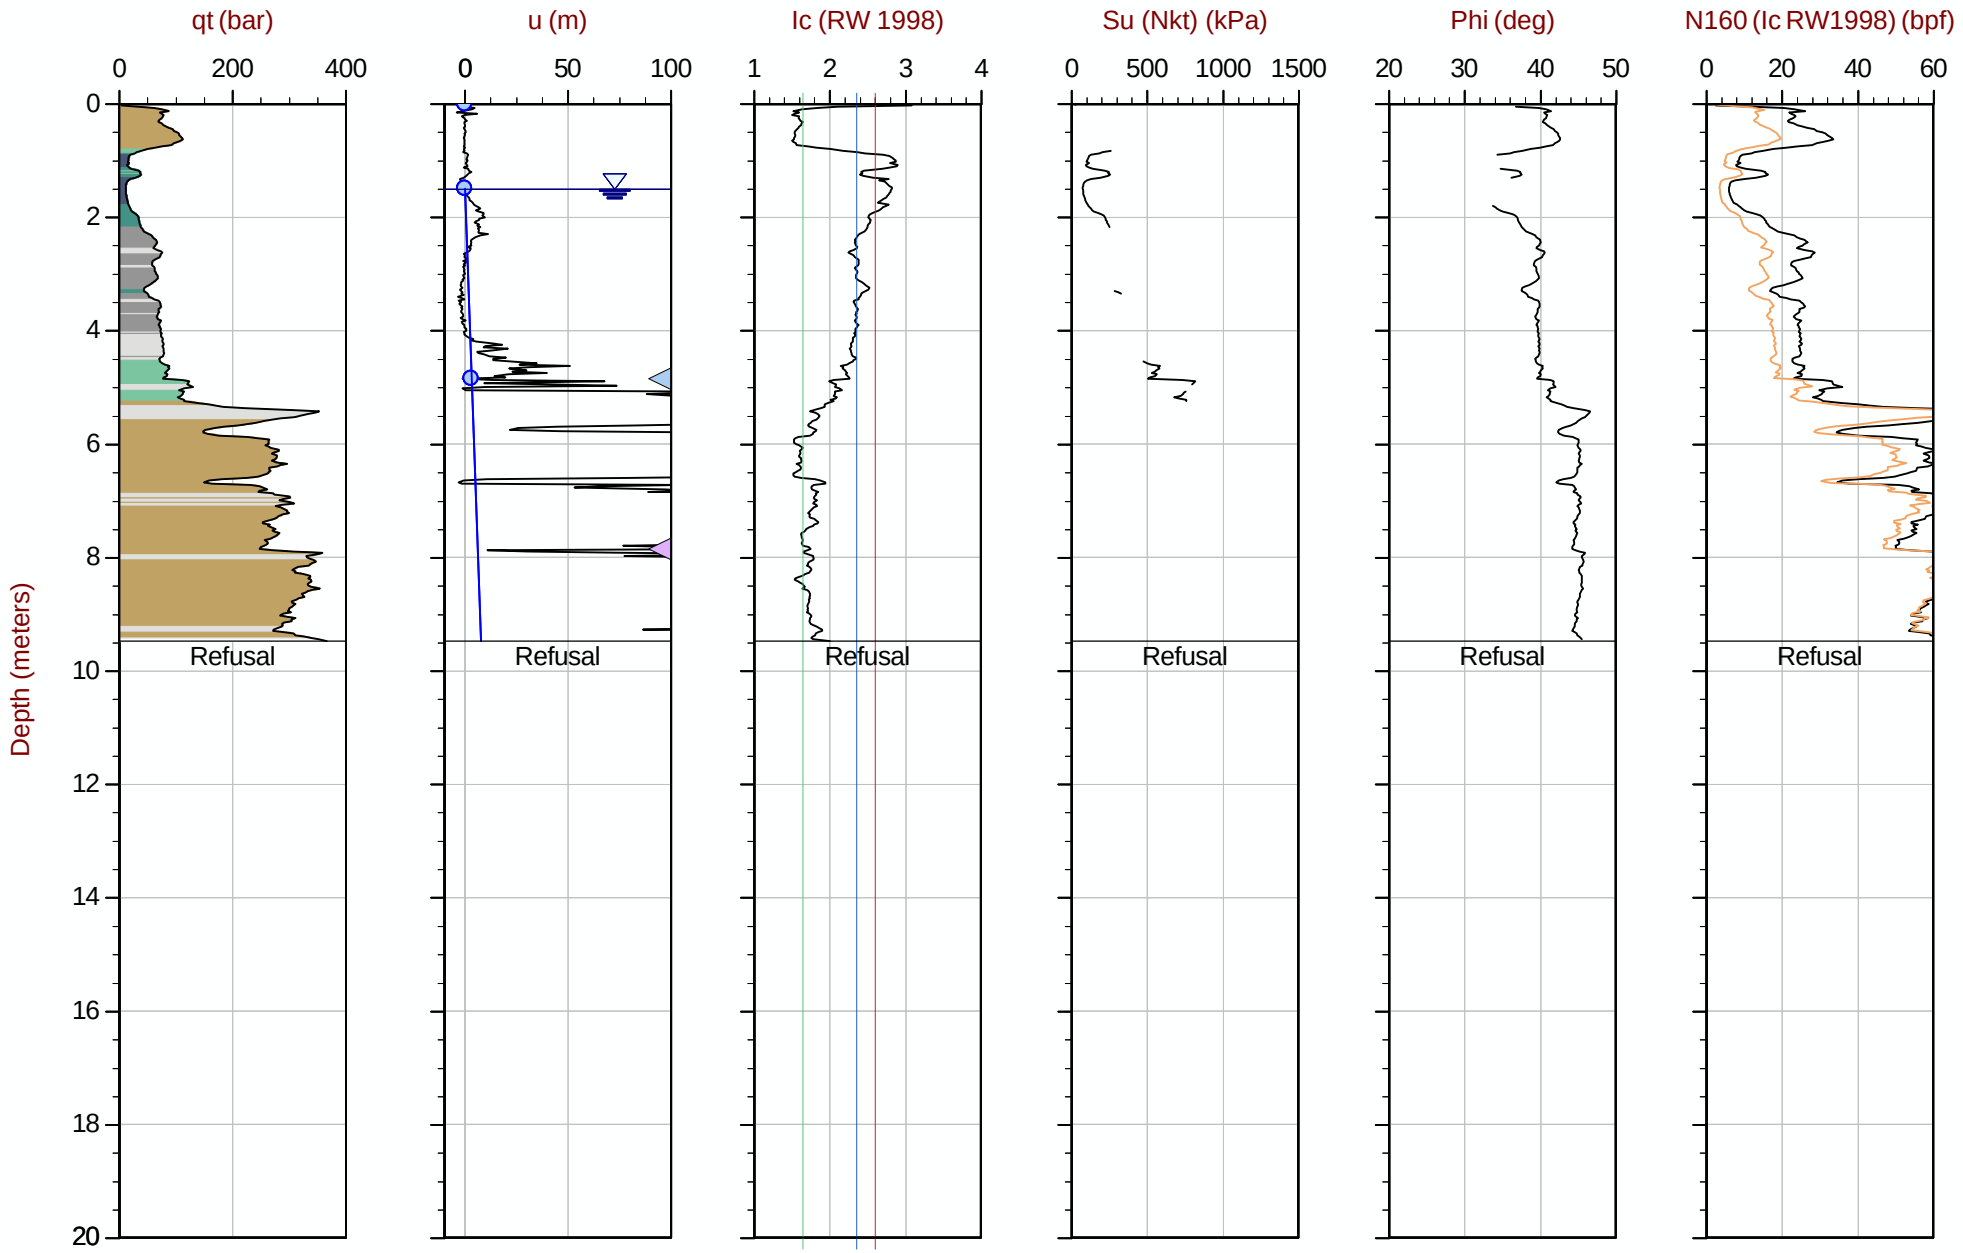

Max Depth: 9.475 m / 31.09 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT205.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612266m E: 416883m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 12:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT206
Cone: 854:T1500F15U35 Area= 15cm2

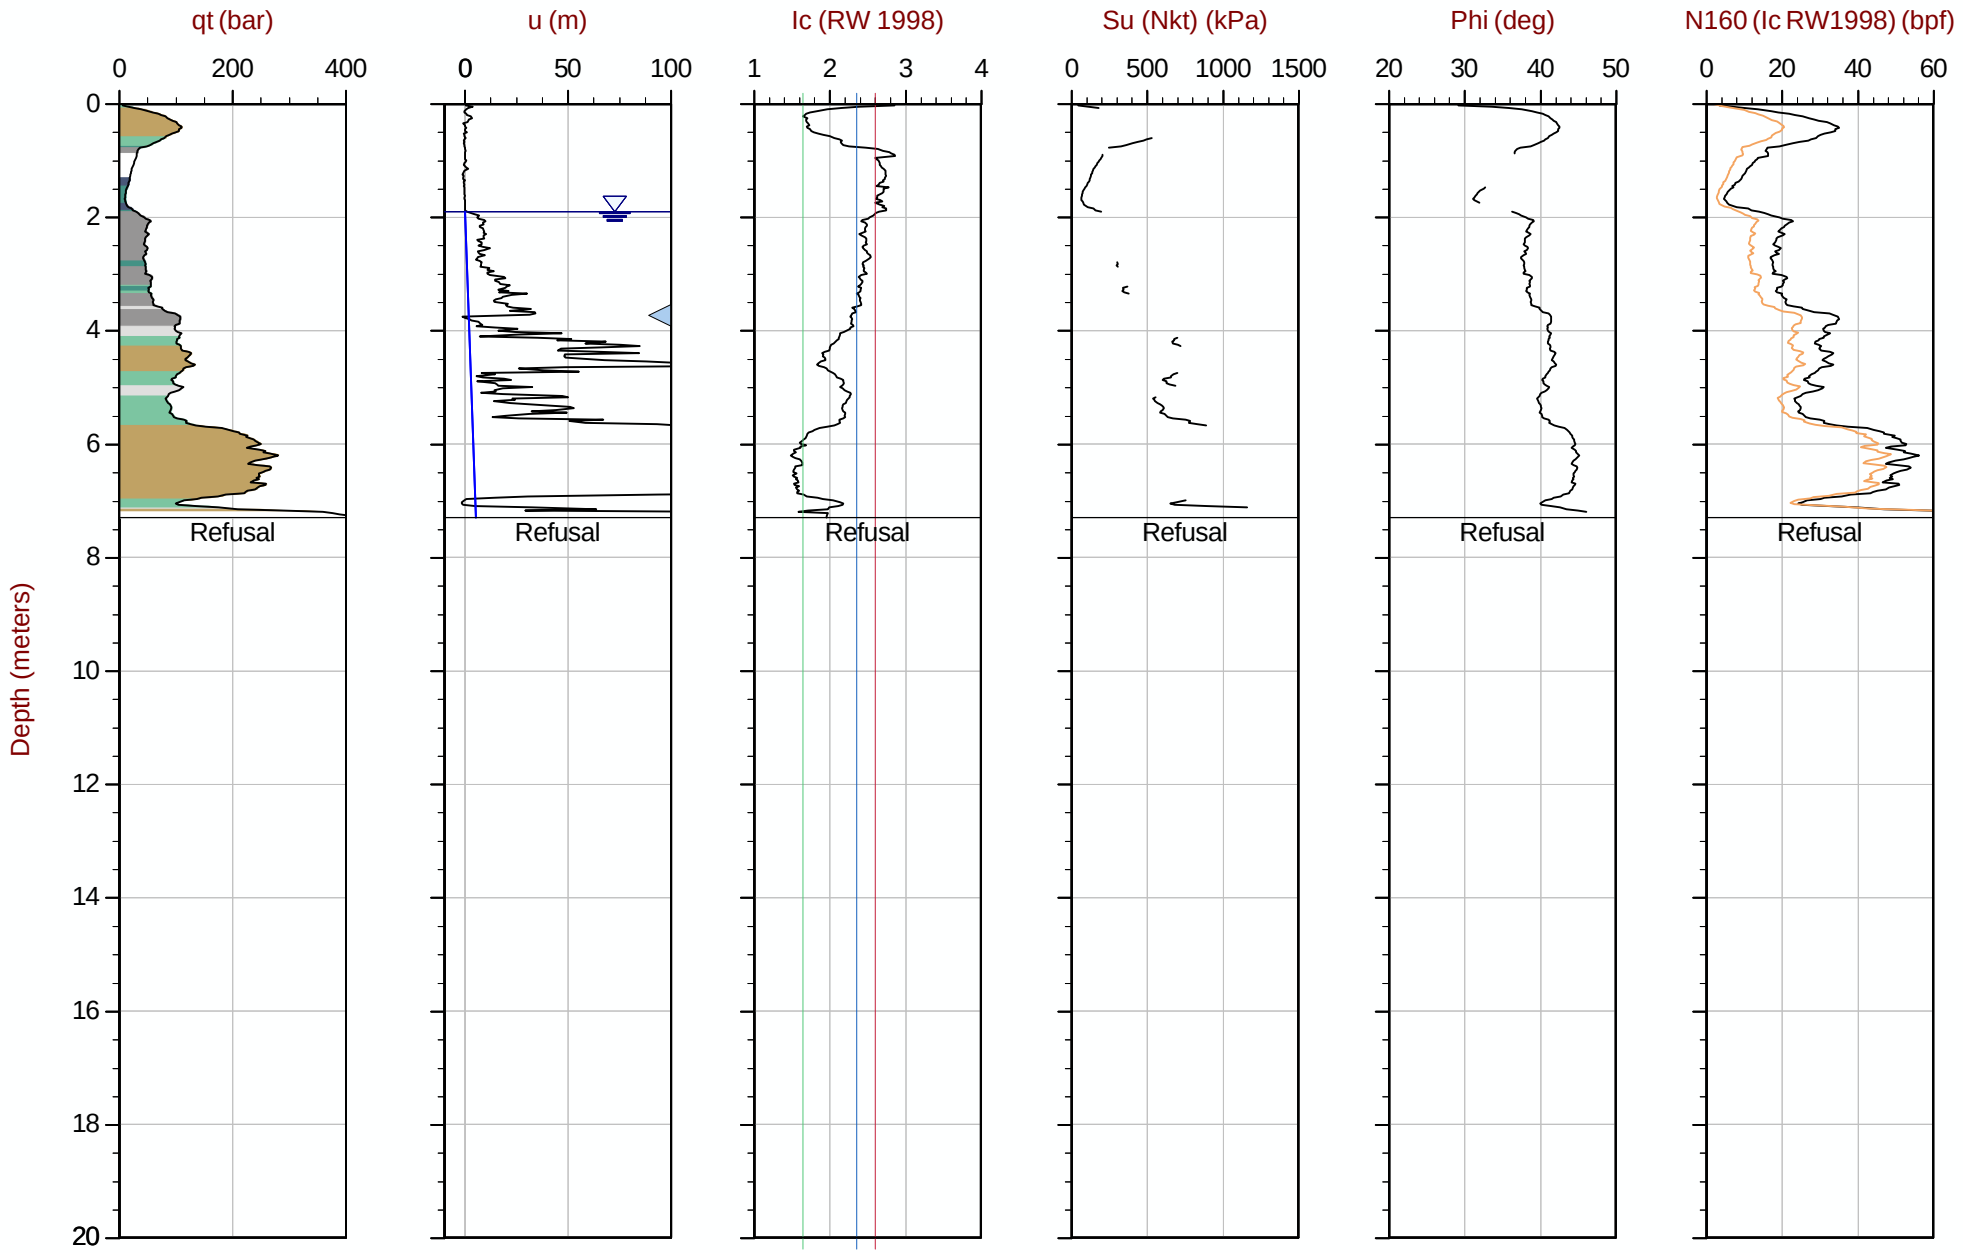

Max Depth: 7.300 m / 23.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT206.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612209m E: 416886m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 13:30
Site: Brooks, Alberta

Sounding: RCPT22-22CPT207
Cone: 854:T1500F15U35 Area= 15cm2

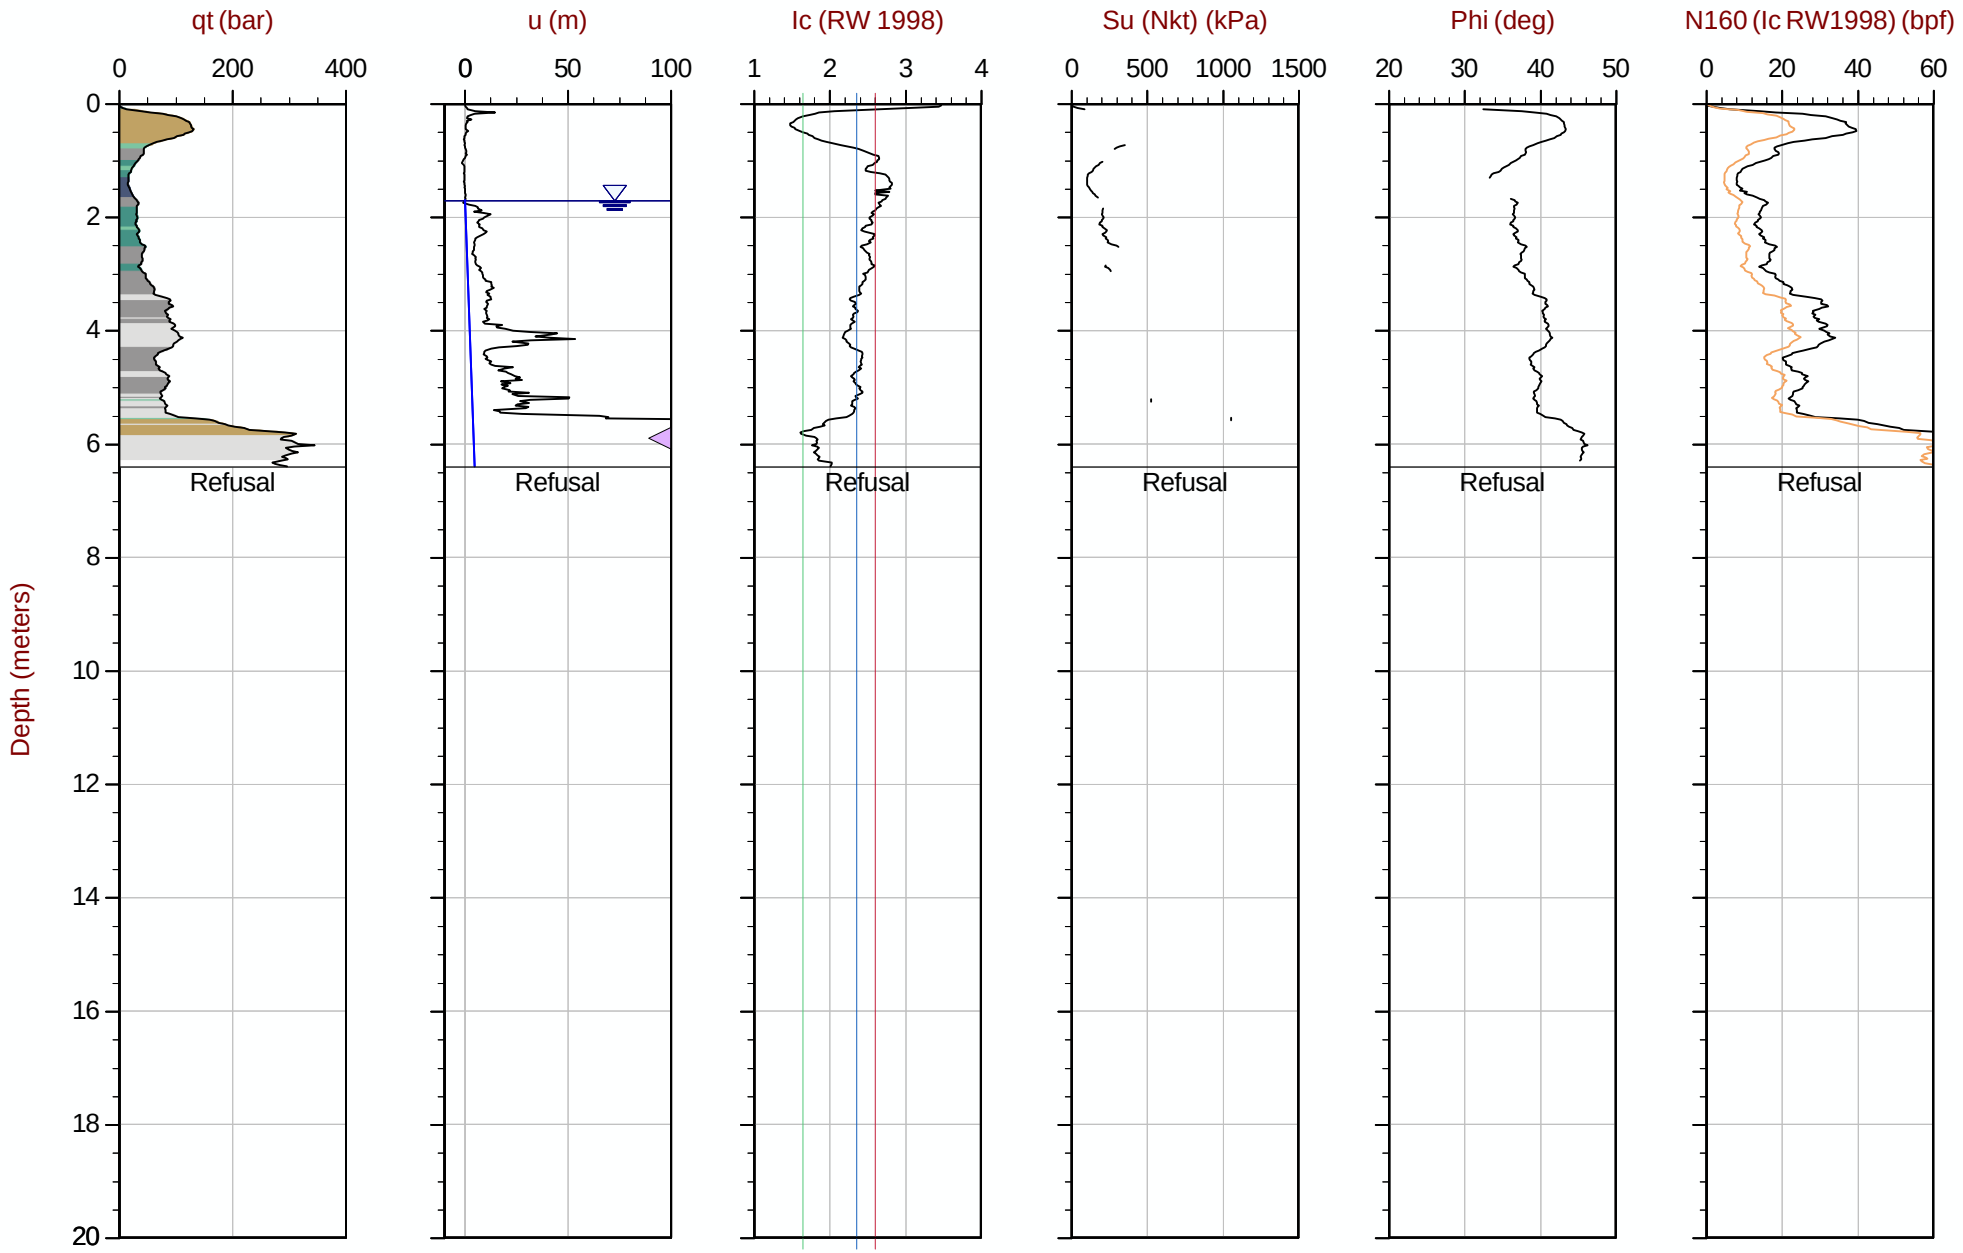

Max Depth: 6.400 m / 21.00 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT207.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612157m E: 416885m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 14:06
Site: Brooks Alberta

Sounding: RCPT22-22CPT208
Cone: 854:T1500F15U35 Area= 15cm2

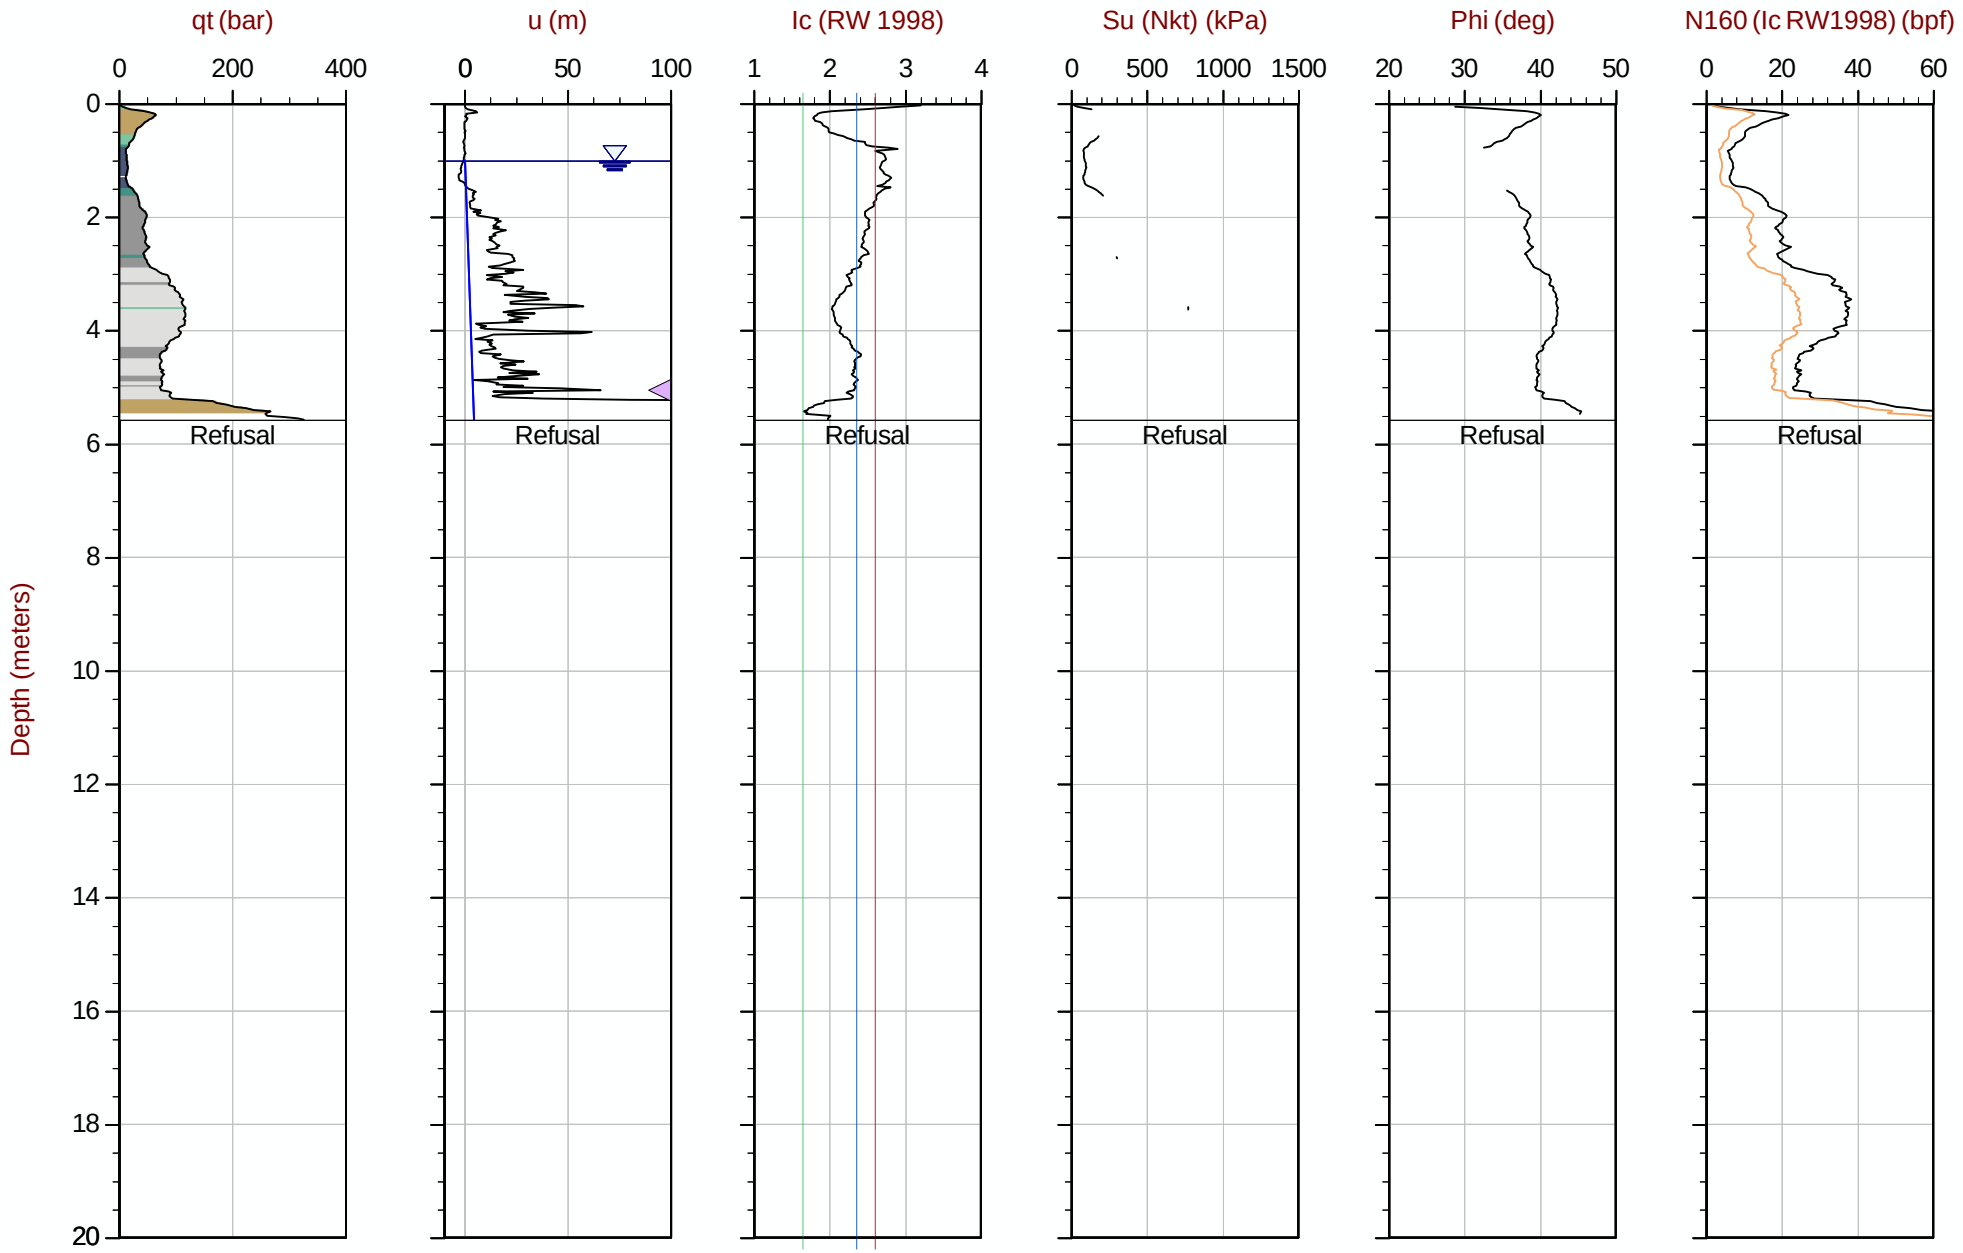

Max Depth: 5.575 m / 18.29 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT208.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612109m E: 416884m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 15:07
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT209
Cone: 854:T1500F15U35 Area= 15cm2

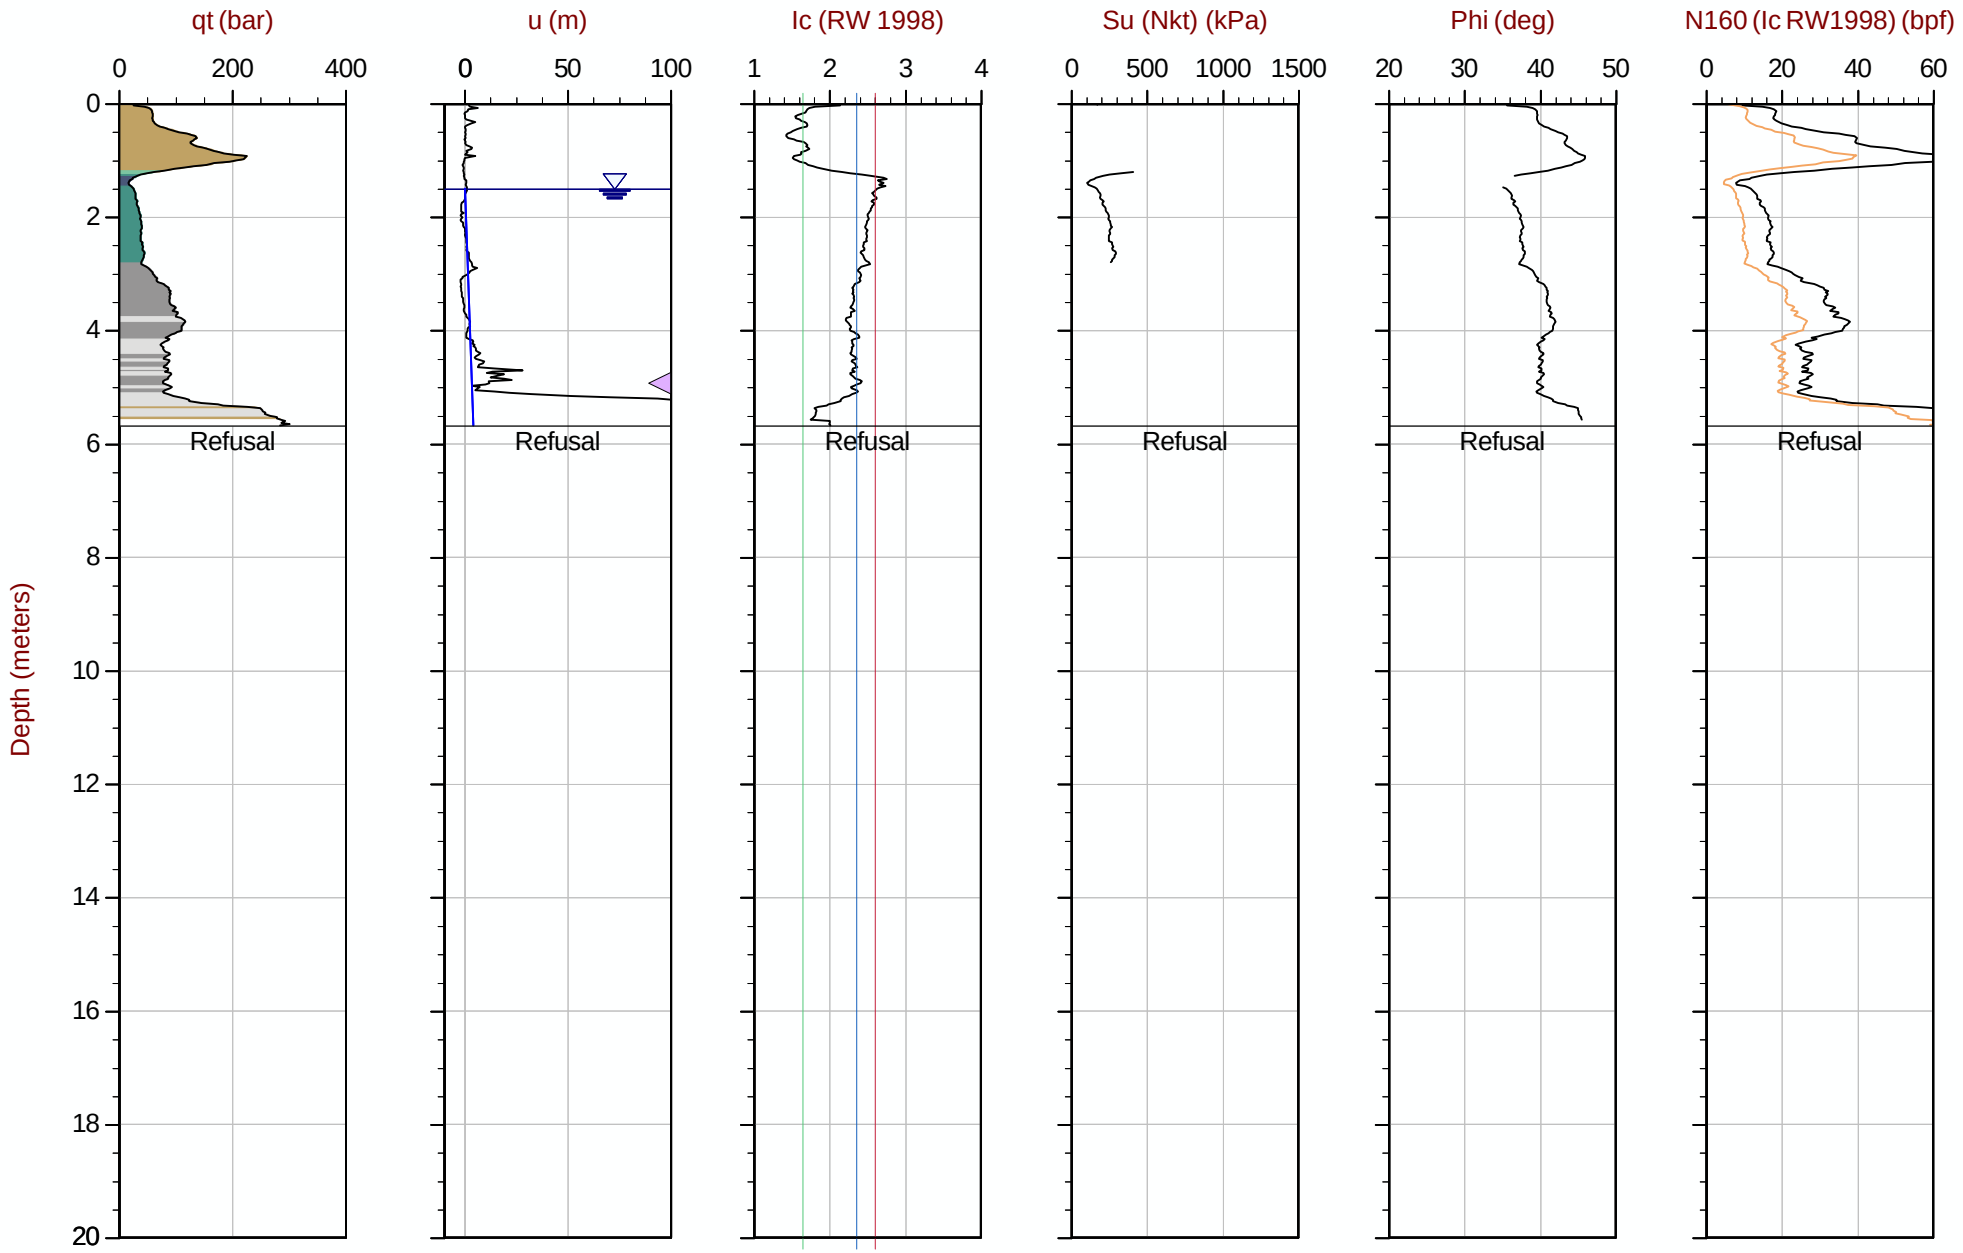

Max Depth: 5.675 m / 18.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT209.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612057m E: 416883m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 15:55
Site: Brooks, Alberta

Sounding: RCPT22-22CPT210
Cone: 854:T1500F15U35 Area= 15cm2

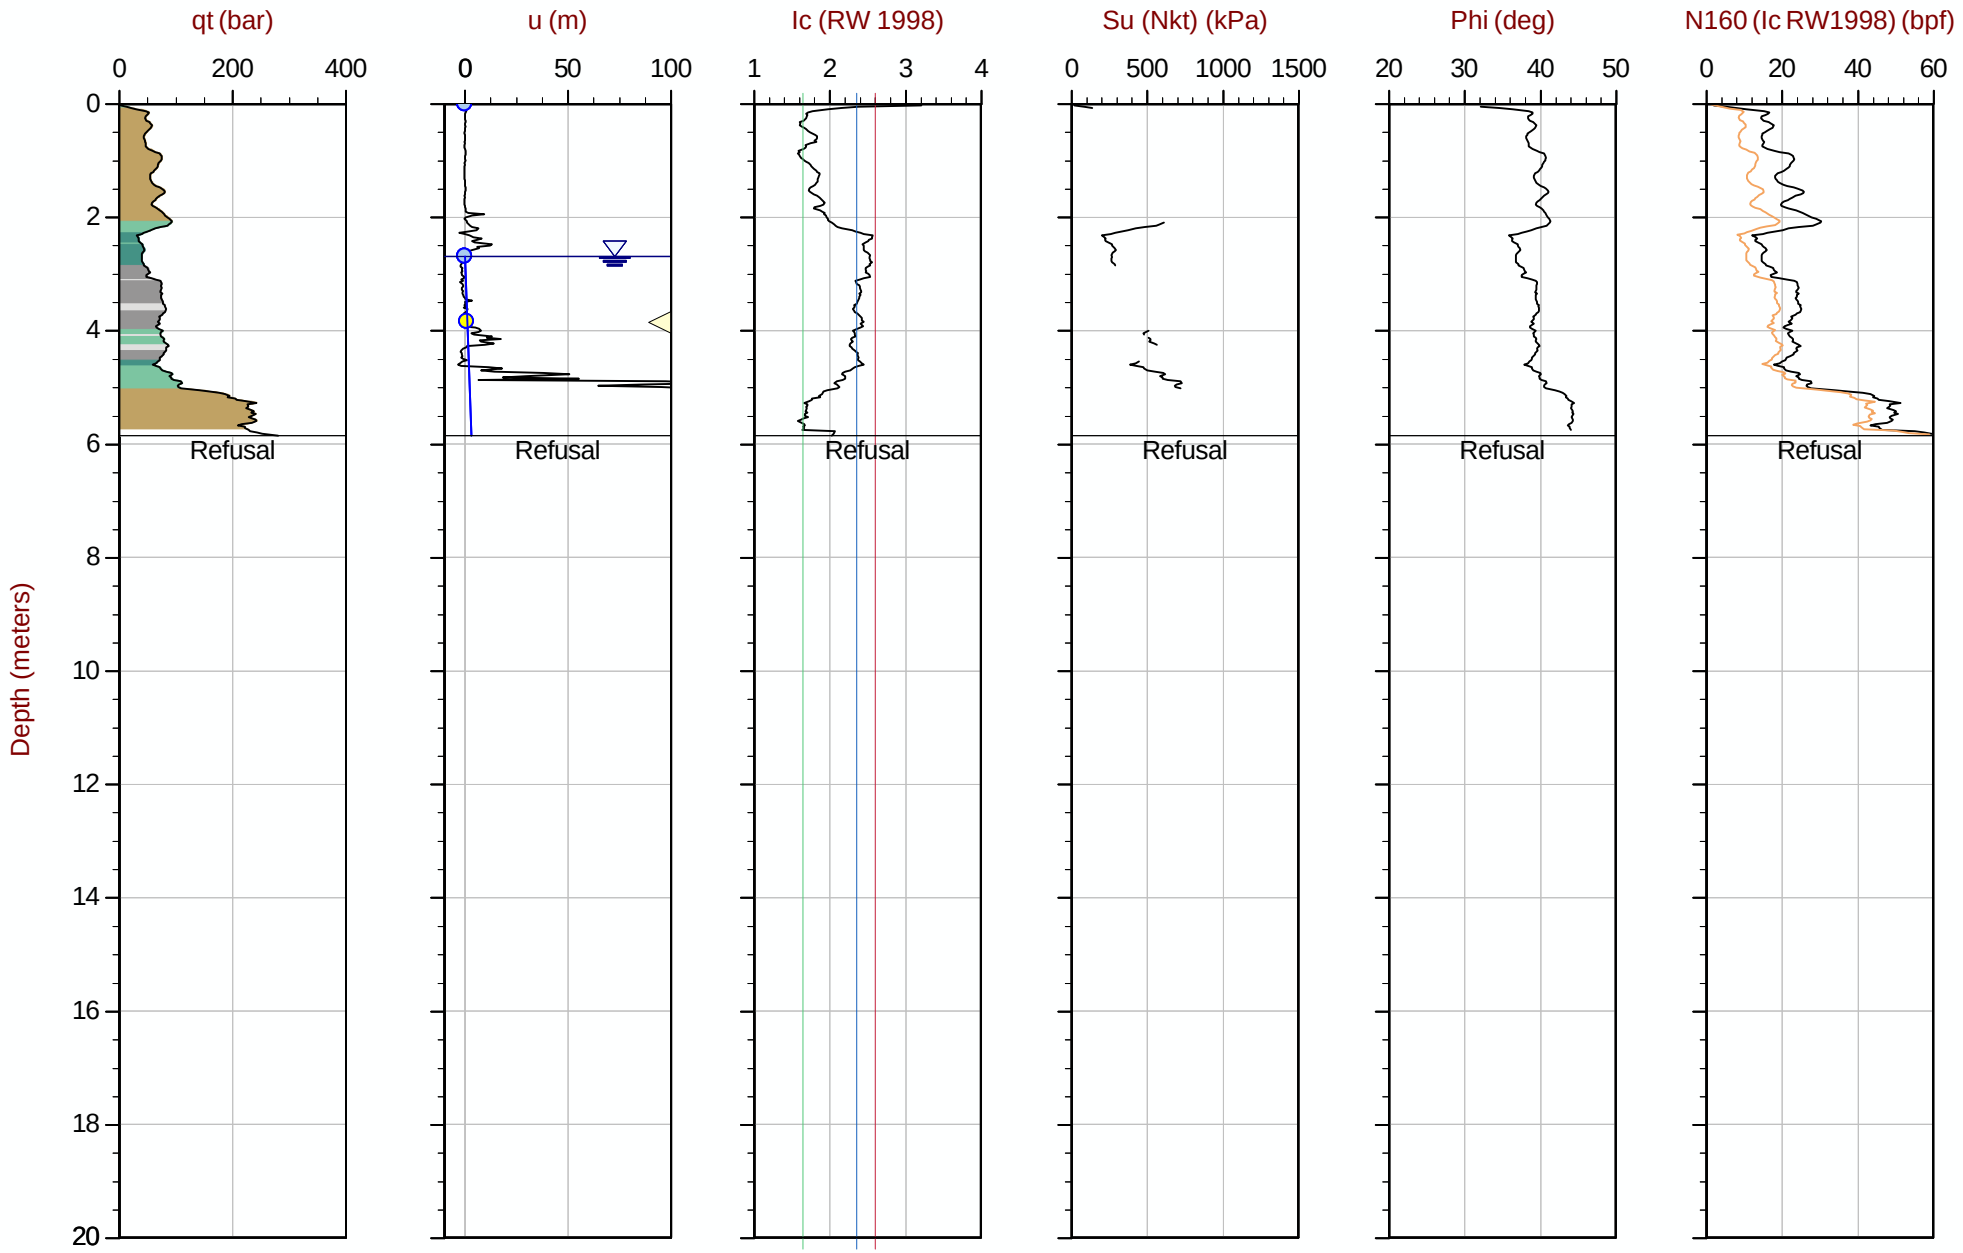

Max Depth: 5.850 m / 19.19 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT210.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612008m E: 416881m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 16:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT211
Cone: 854:T1500F15U35 Area= 15cm2

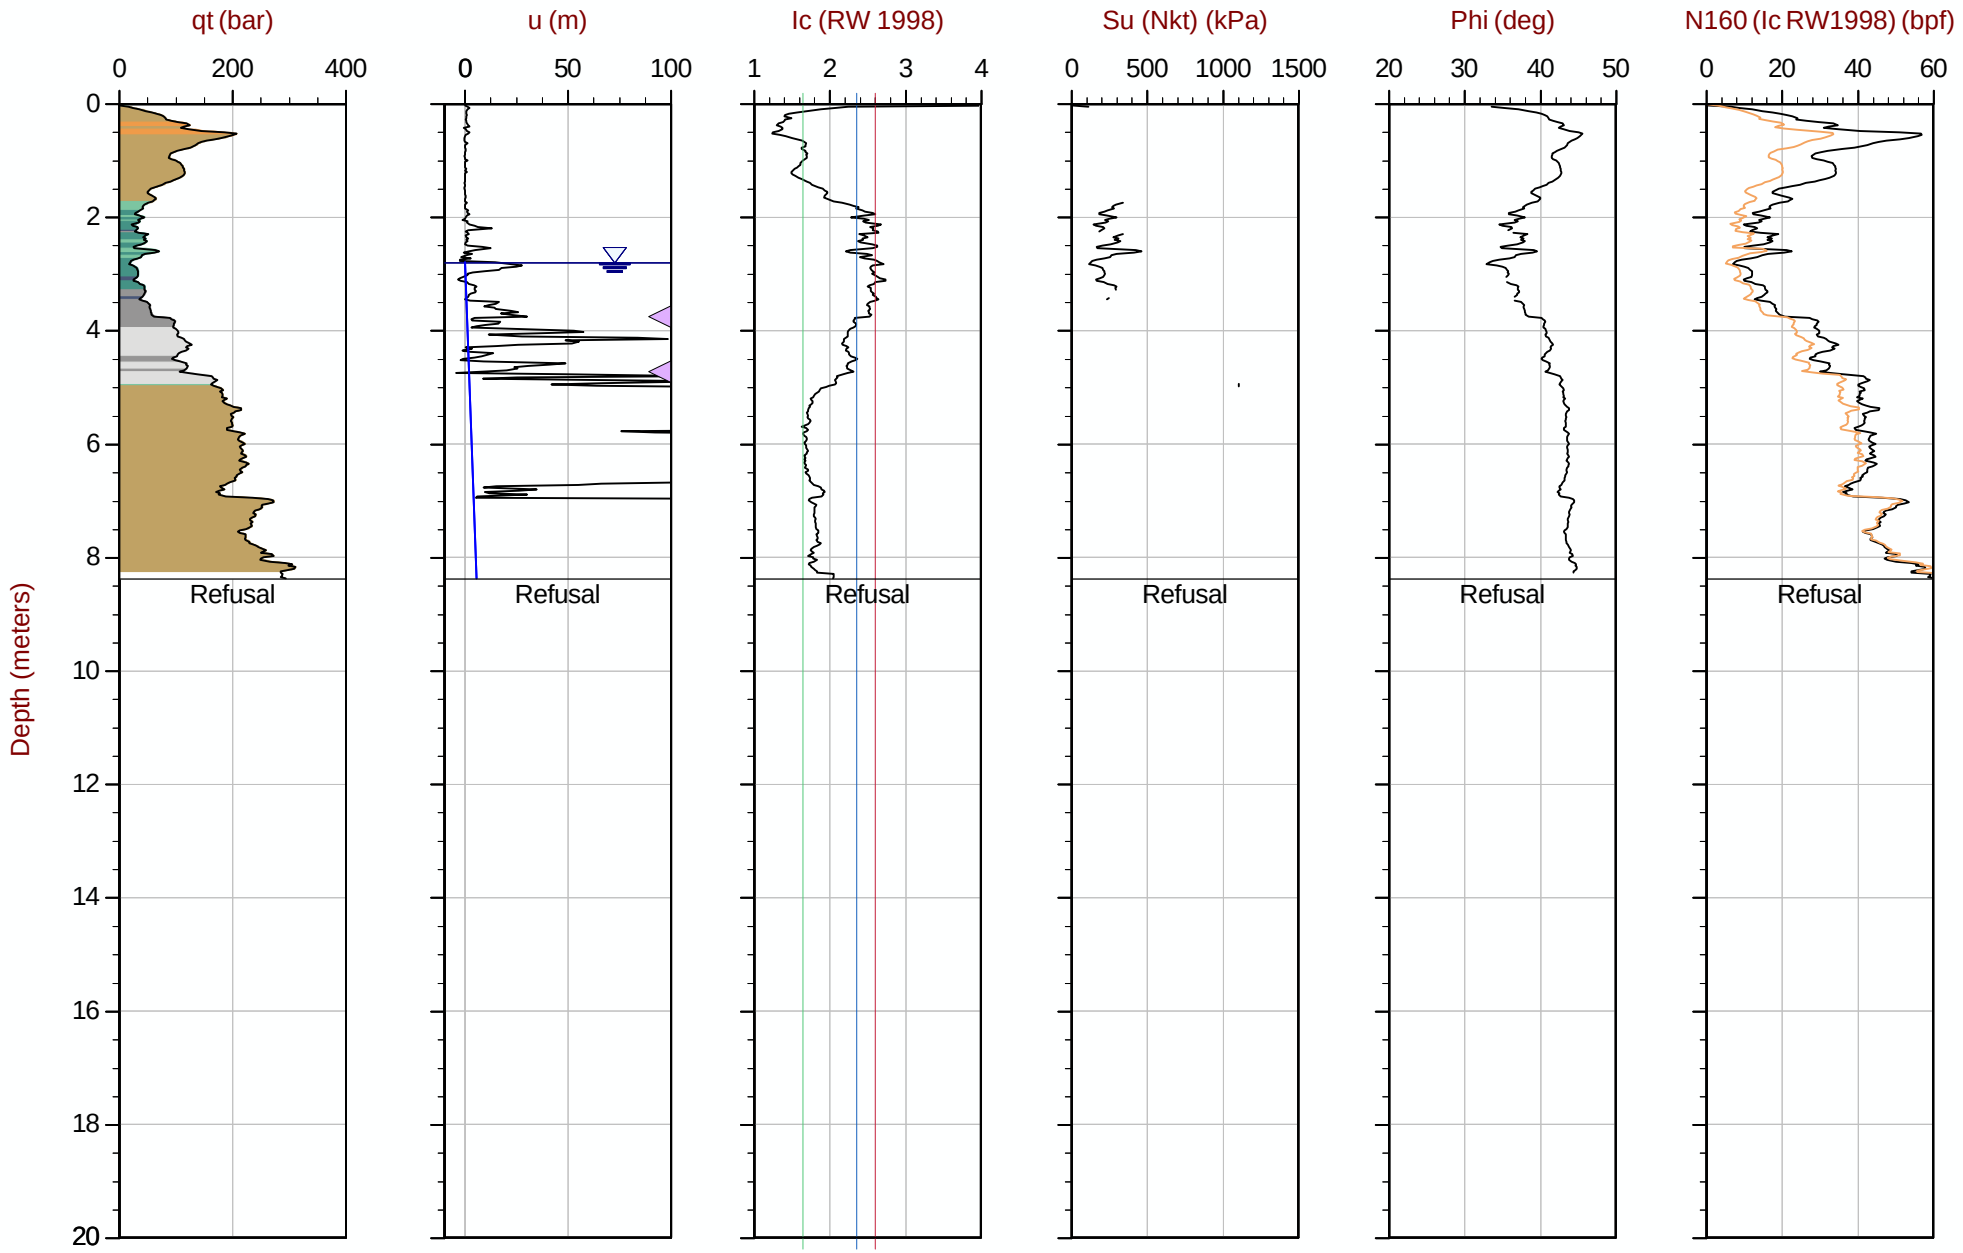

Max Depth: 8.375 m / 27.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT211.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611957m E: 416880m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 17:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT212
Cone: 854:T1500F15U35 Area= 15cm2

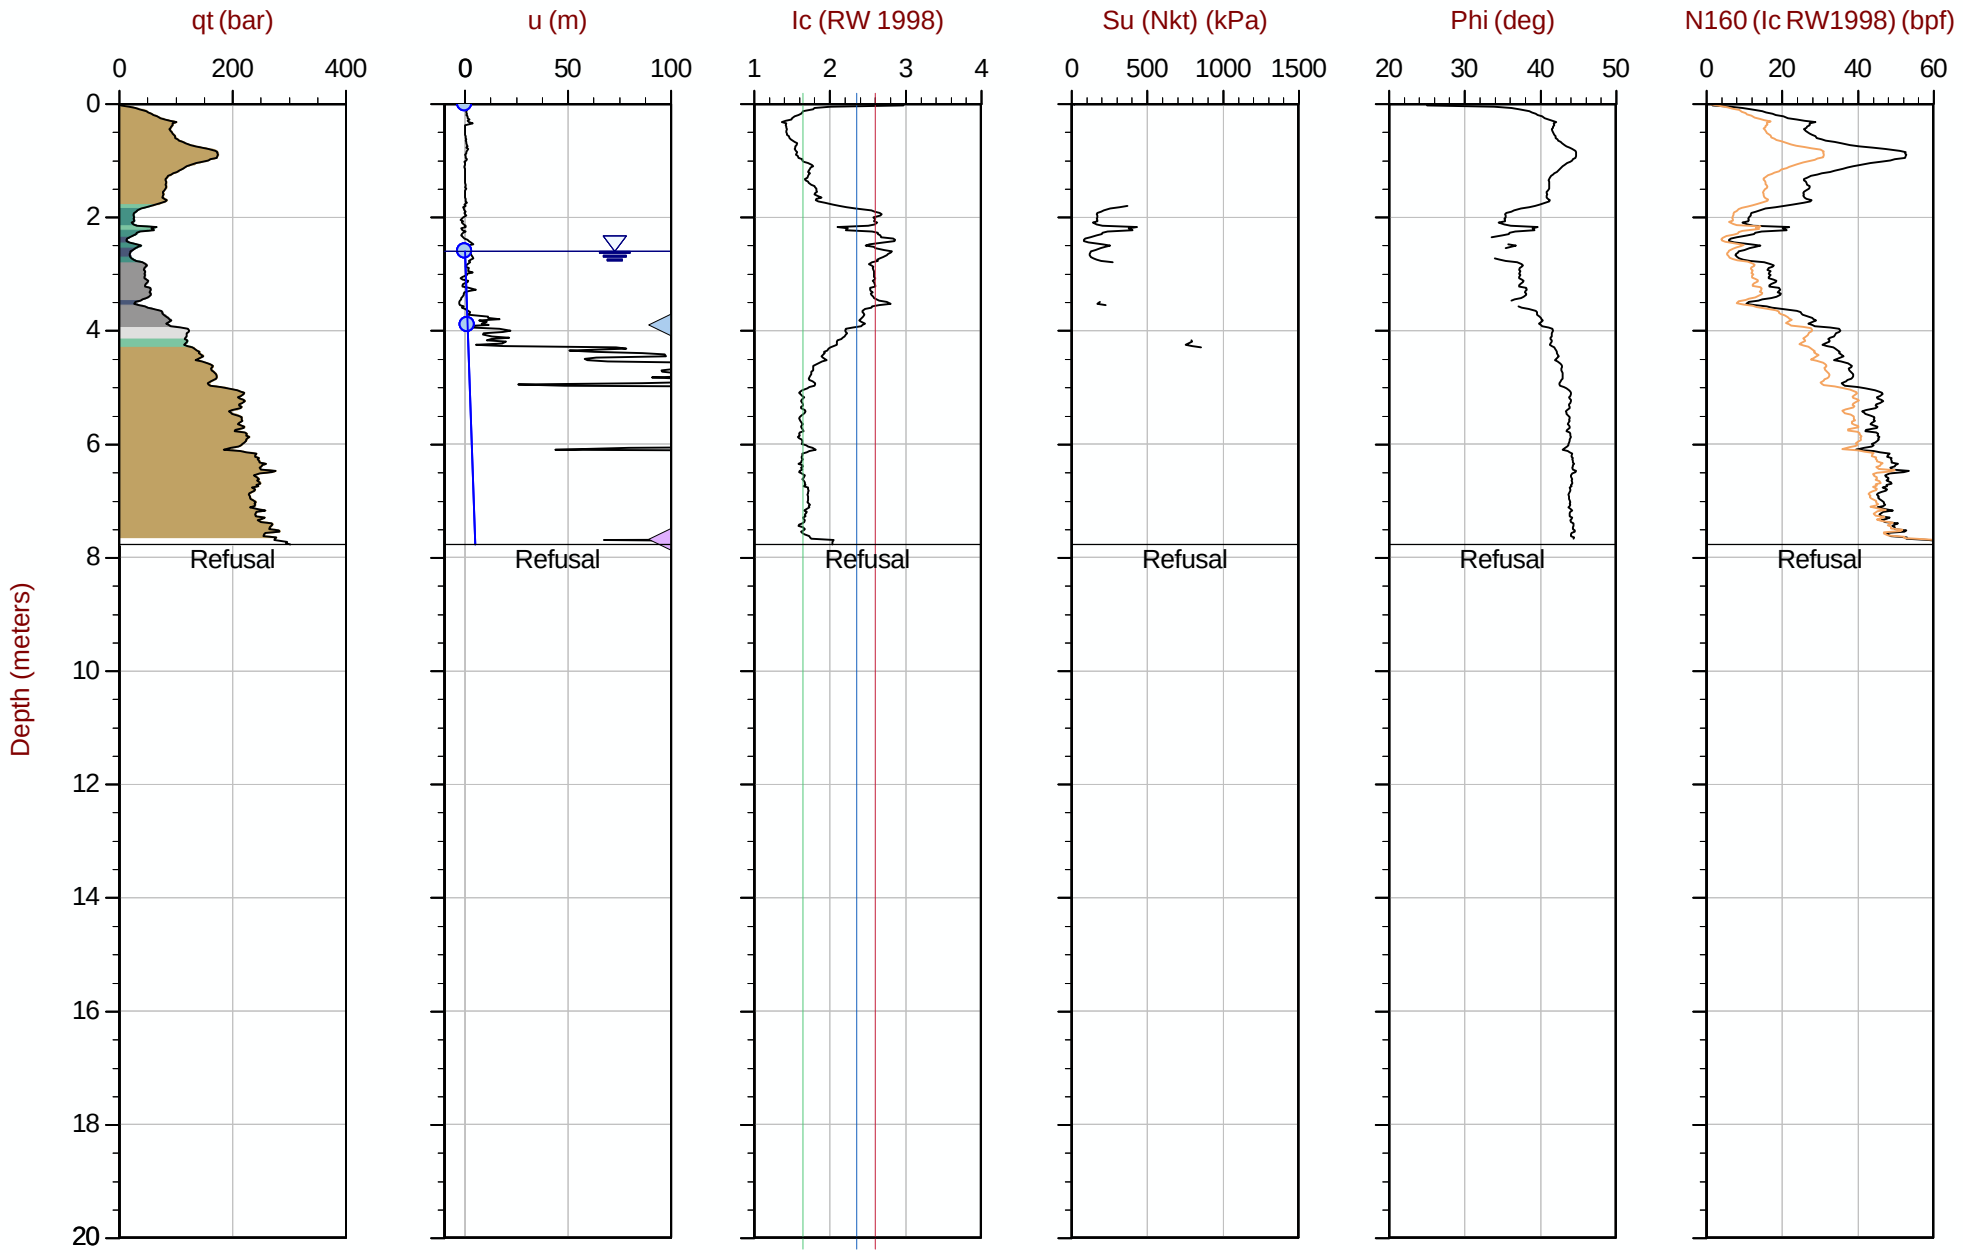

Max Depth: 7.775 m / 25.51 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT212.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611908m E: 416879m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 06:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT213
Cone: 854:T1500F15U35 Area= 15cm2

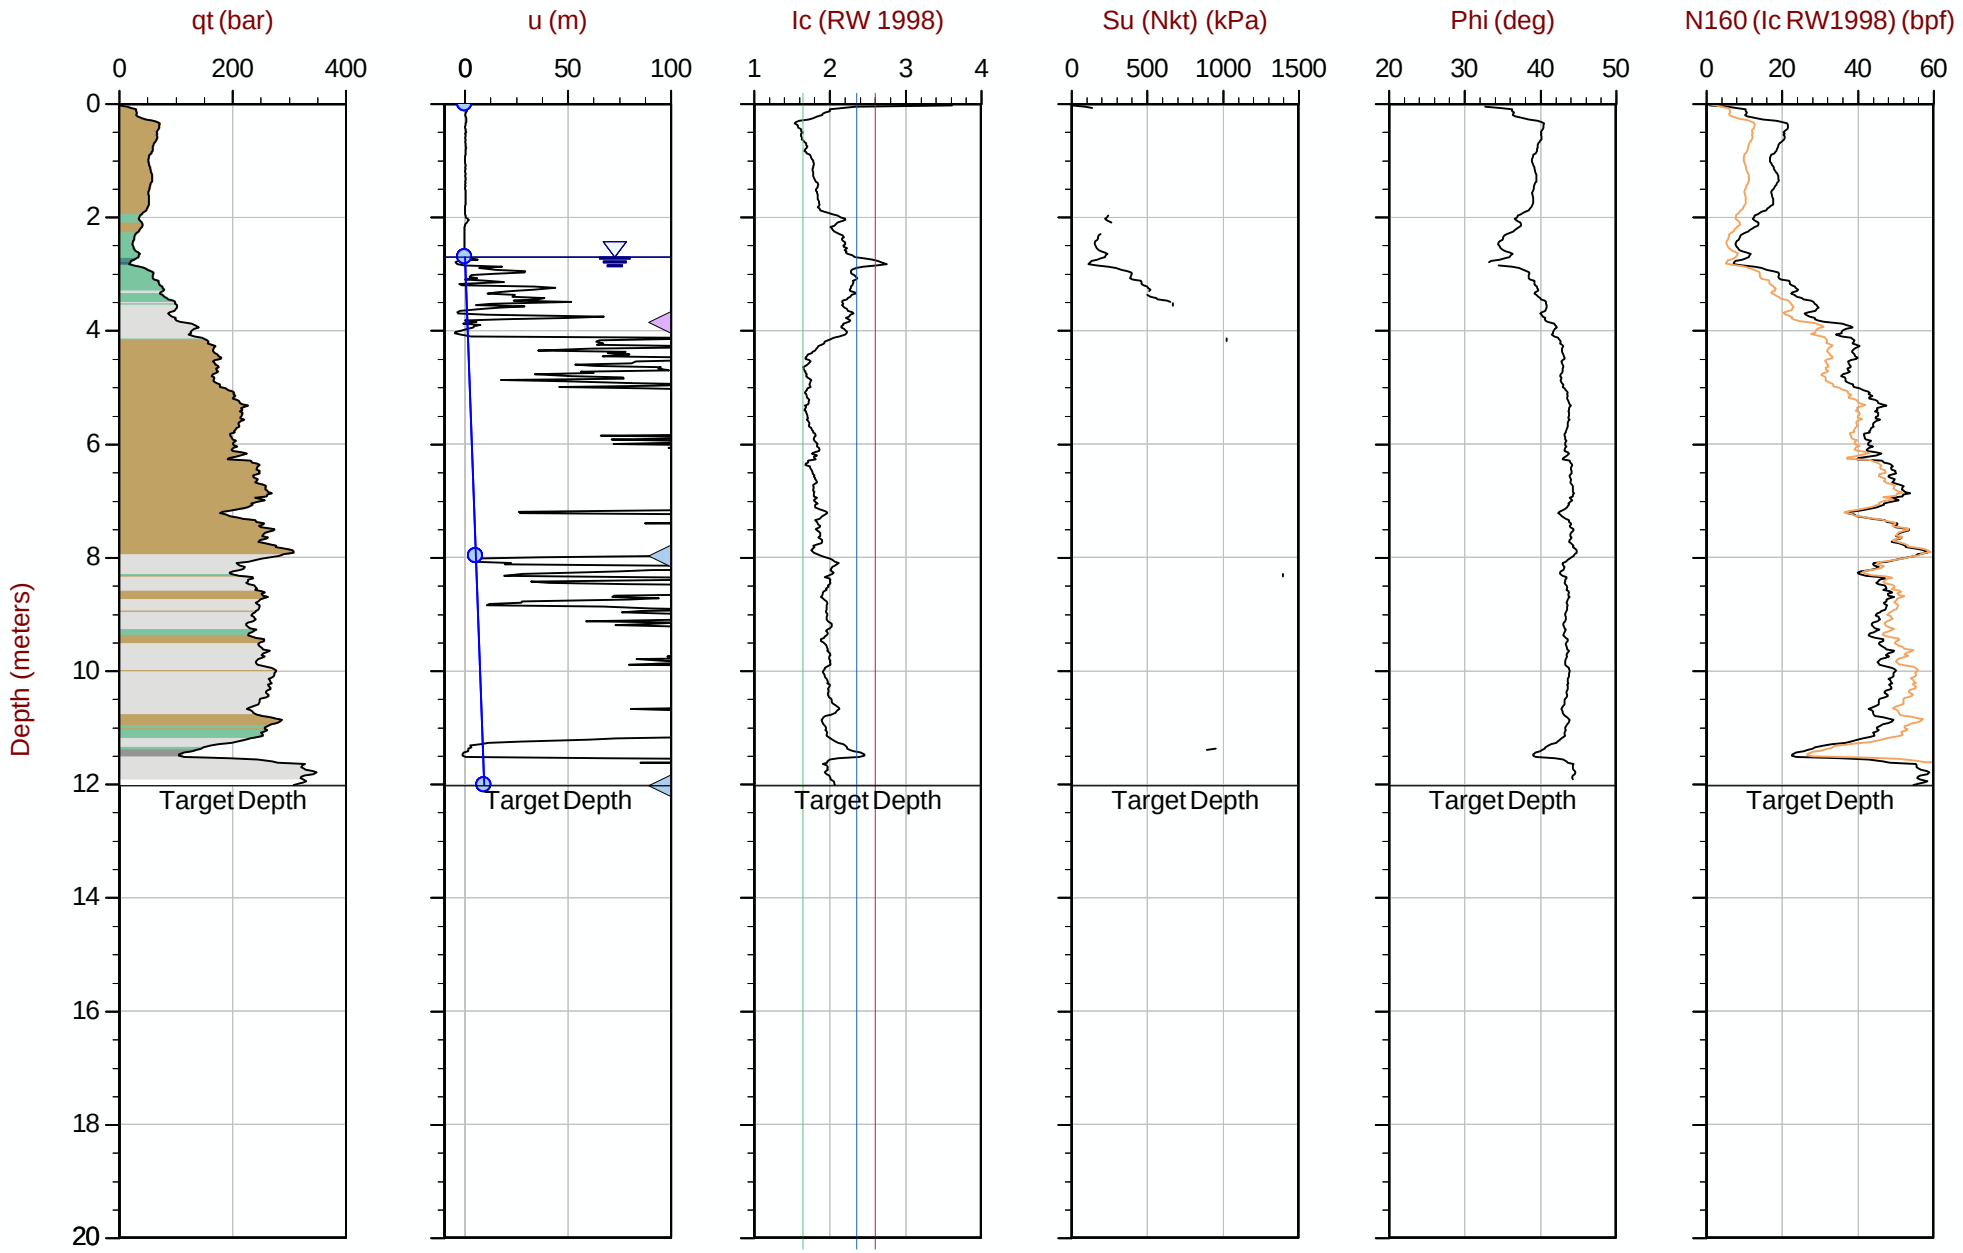

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT213.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611857m E: 416878m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 08:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT214
Cone: 854:T1500F15U35 Area= 15cm2

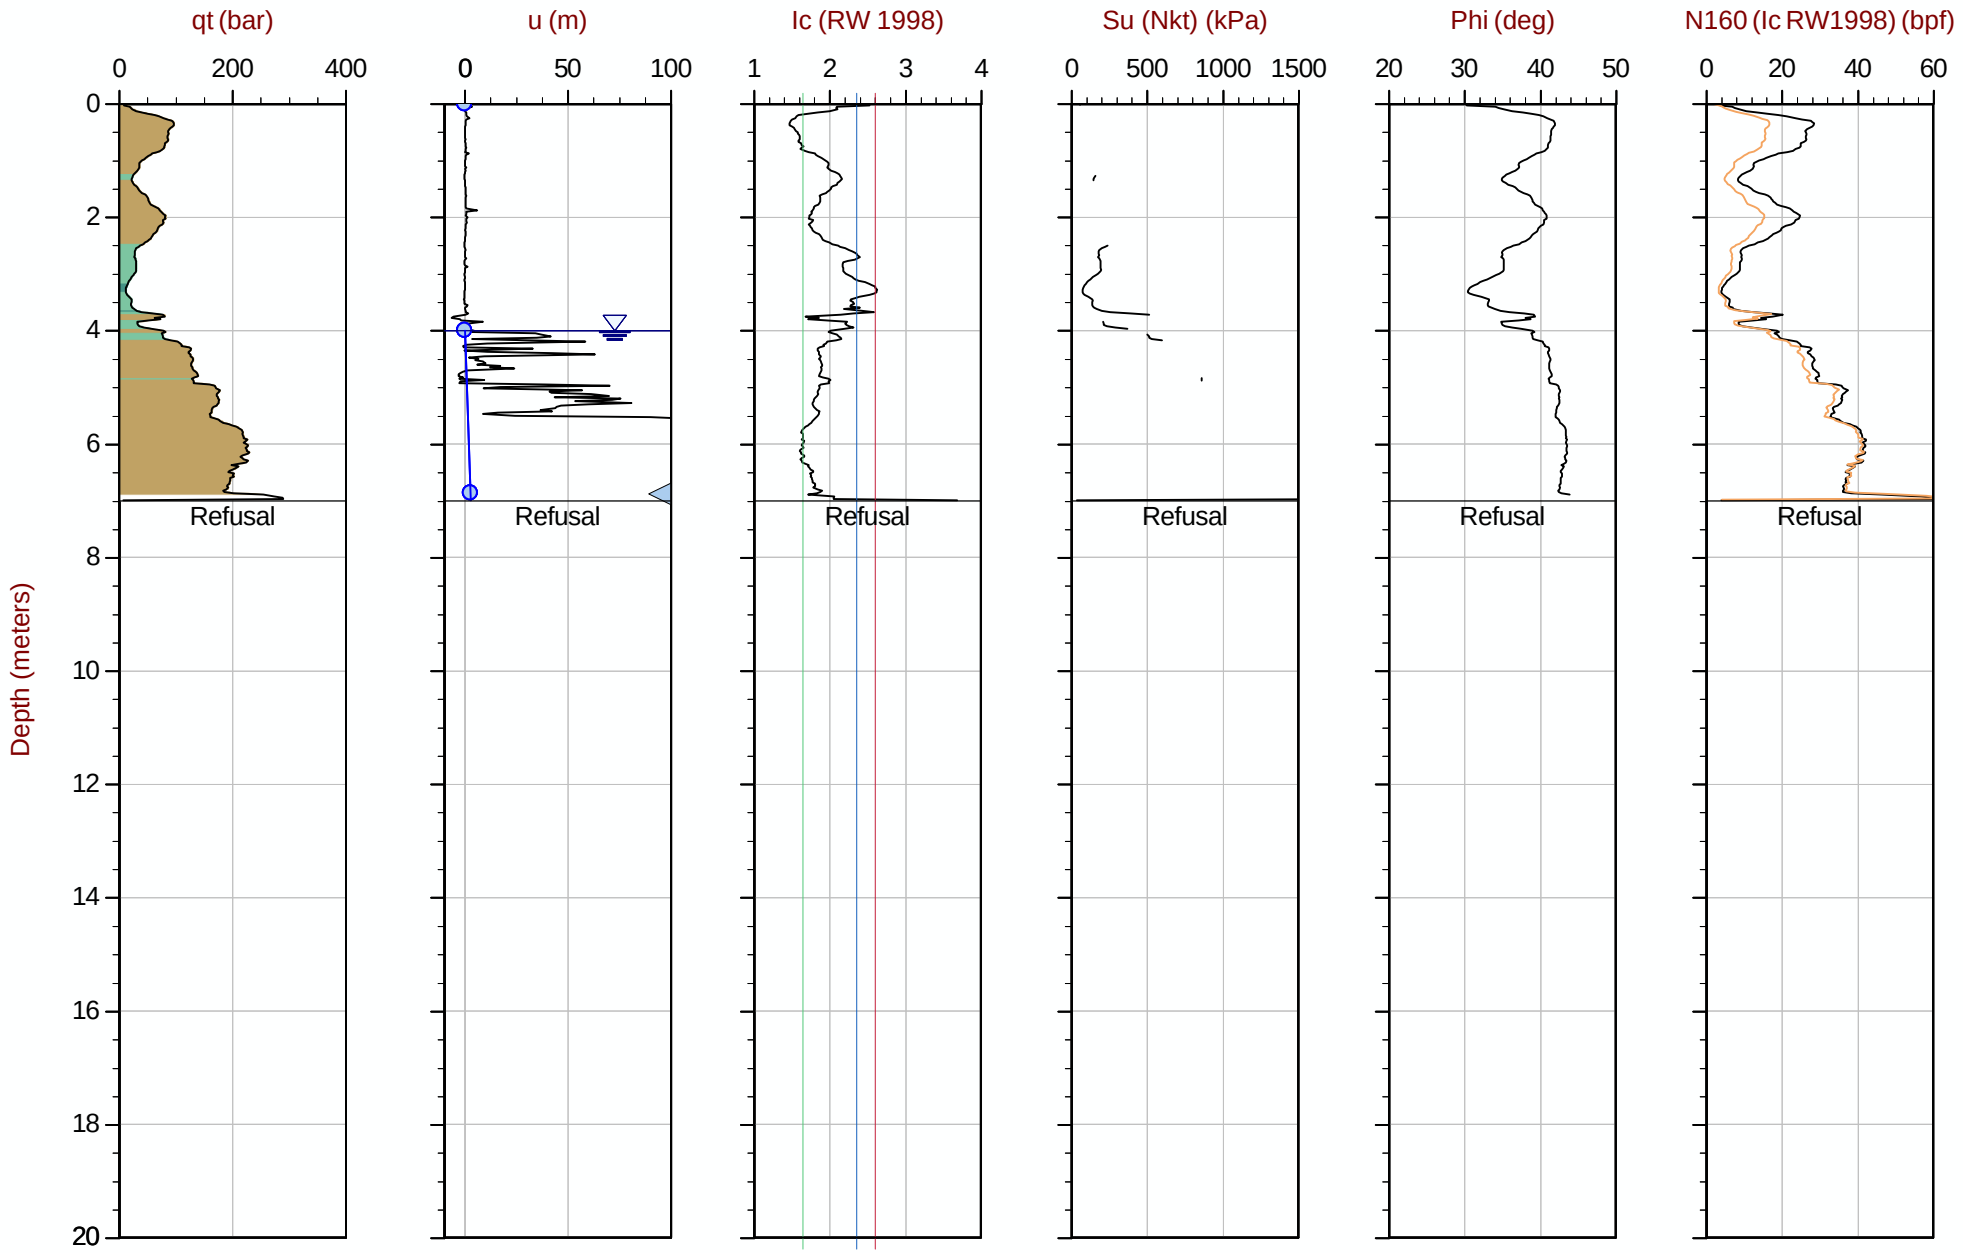

Max Depth: 7.000 m / 22.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT214.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611810m E: 416877m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 09:20
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT215
Cone: 854:T1500F15U35 Area= 15cm2

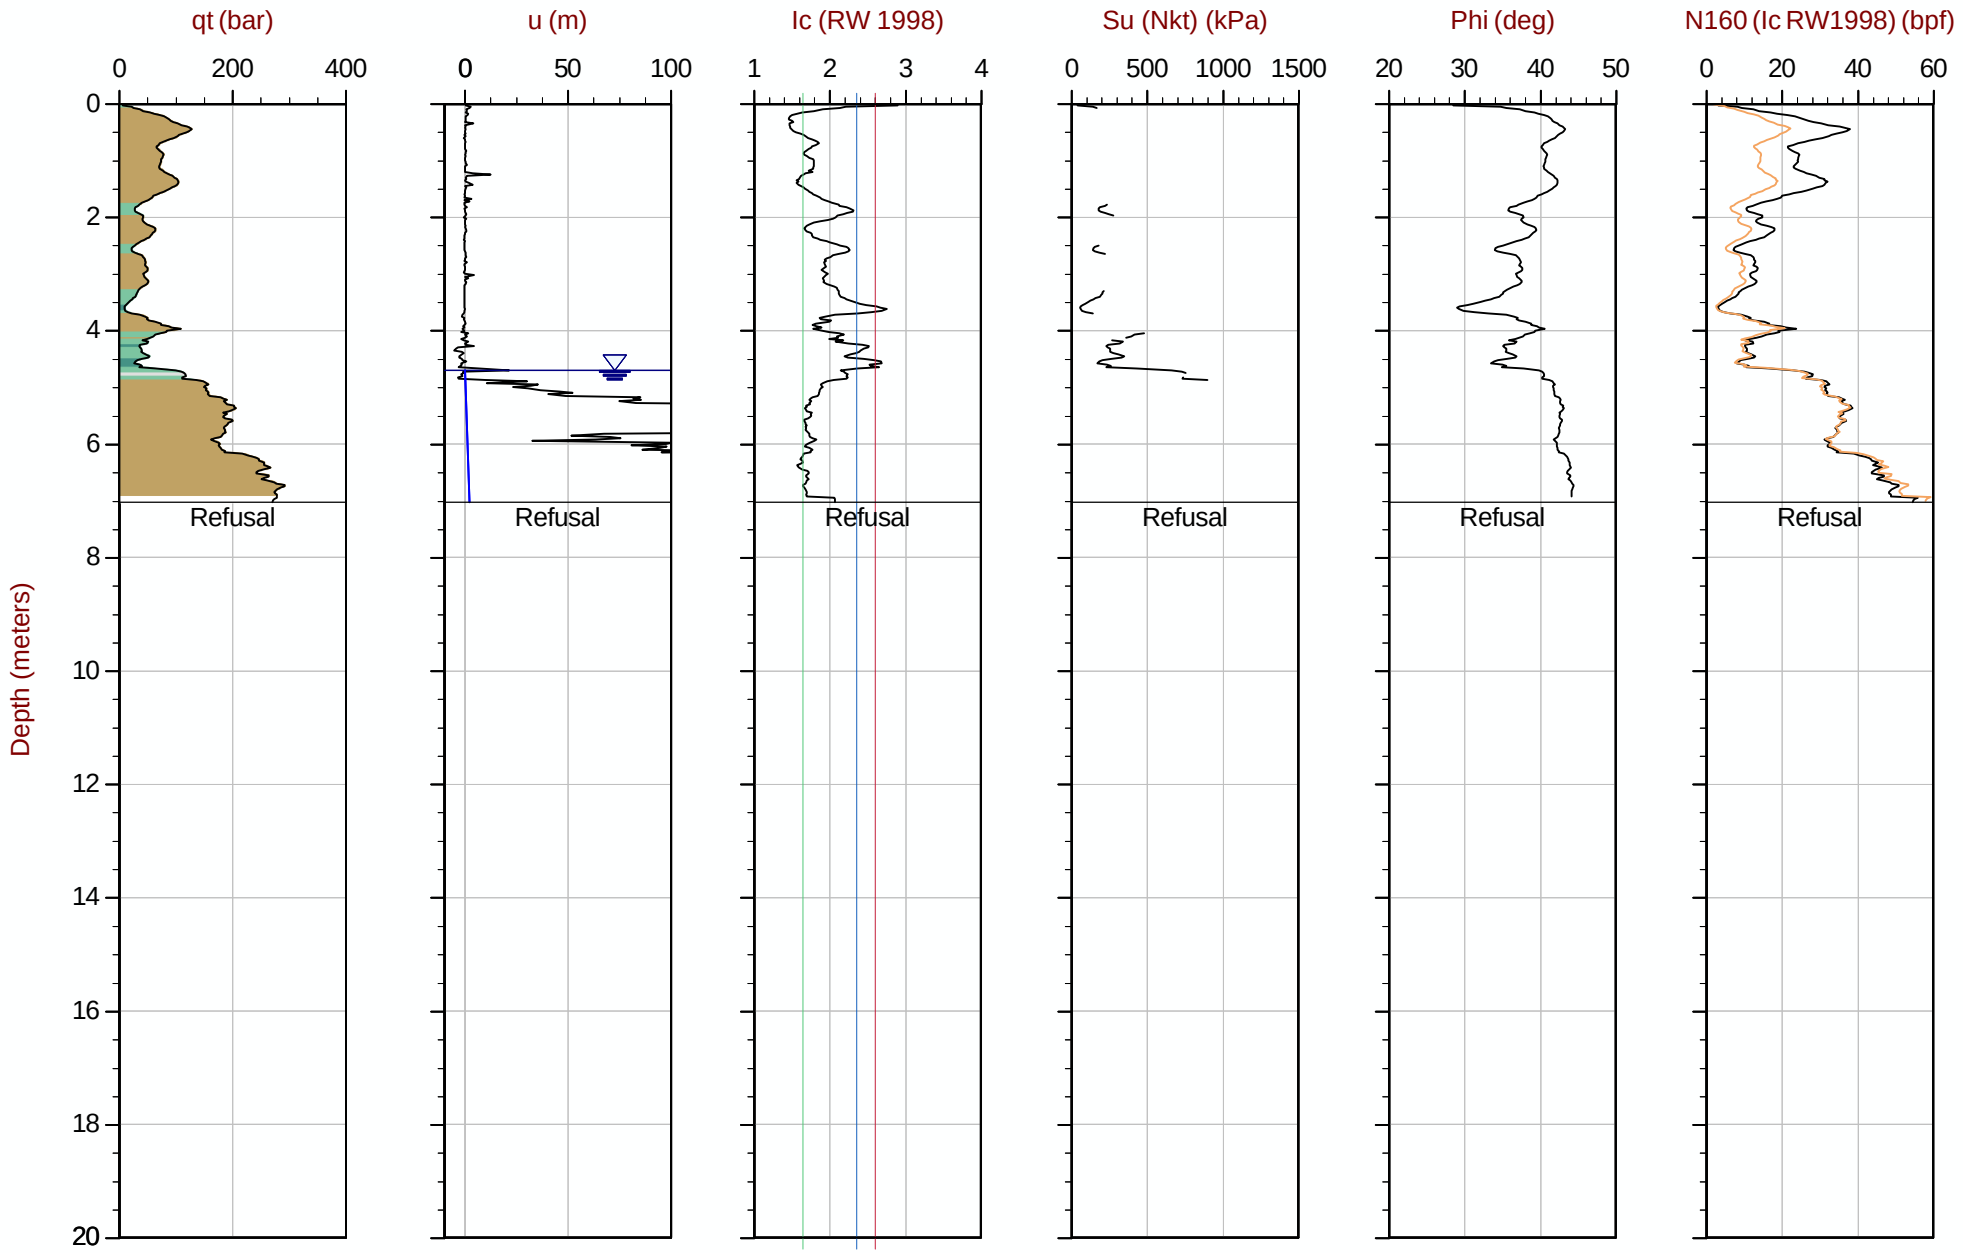

Max Depth: 7.025 m / 23.05 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT215.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611757m E: 416875m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 10:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT216
Cone: 854:T1500F15U35 Area= 15cm2

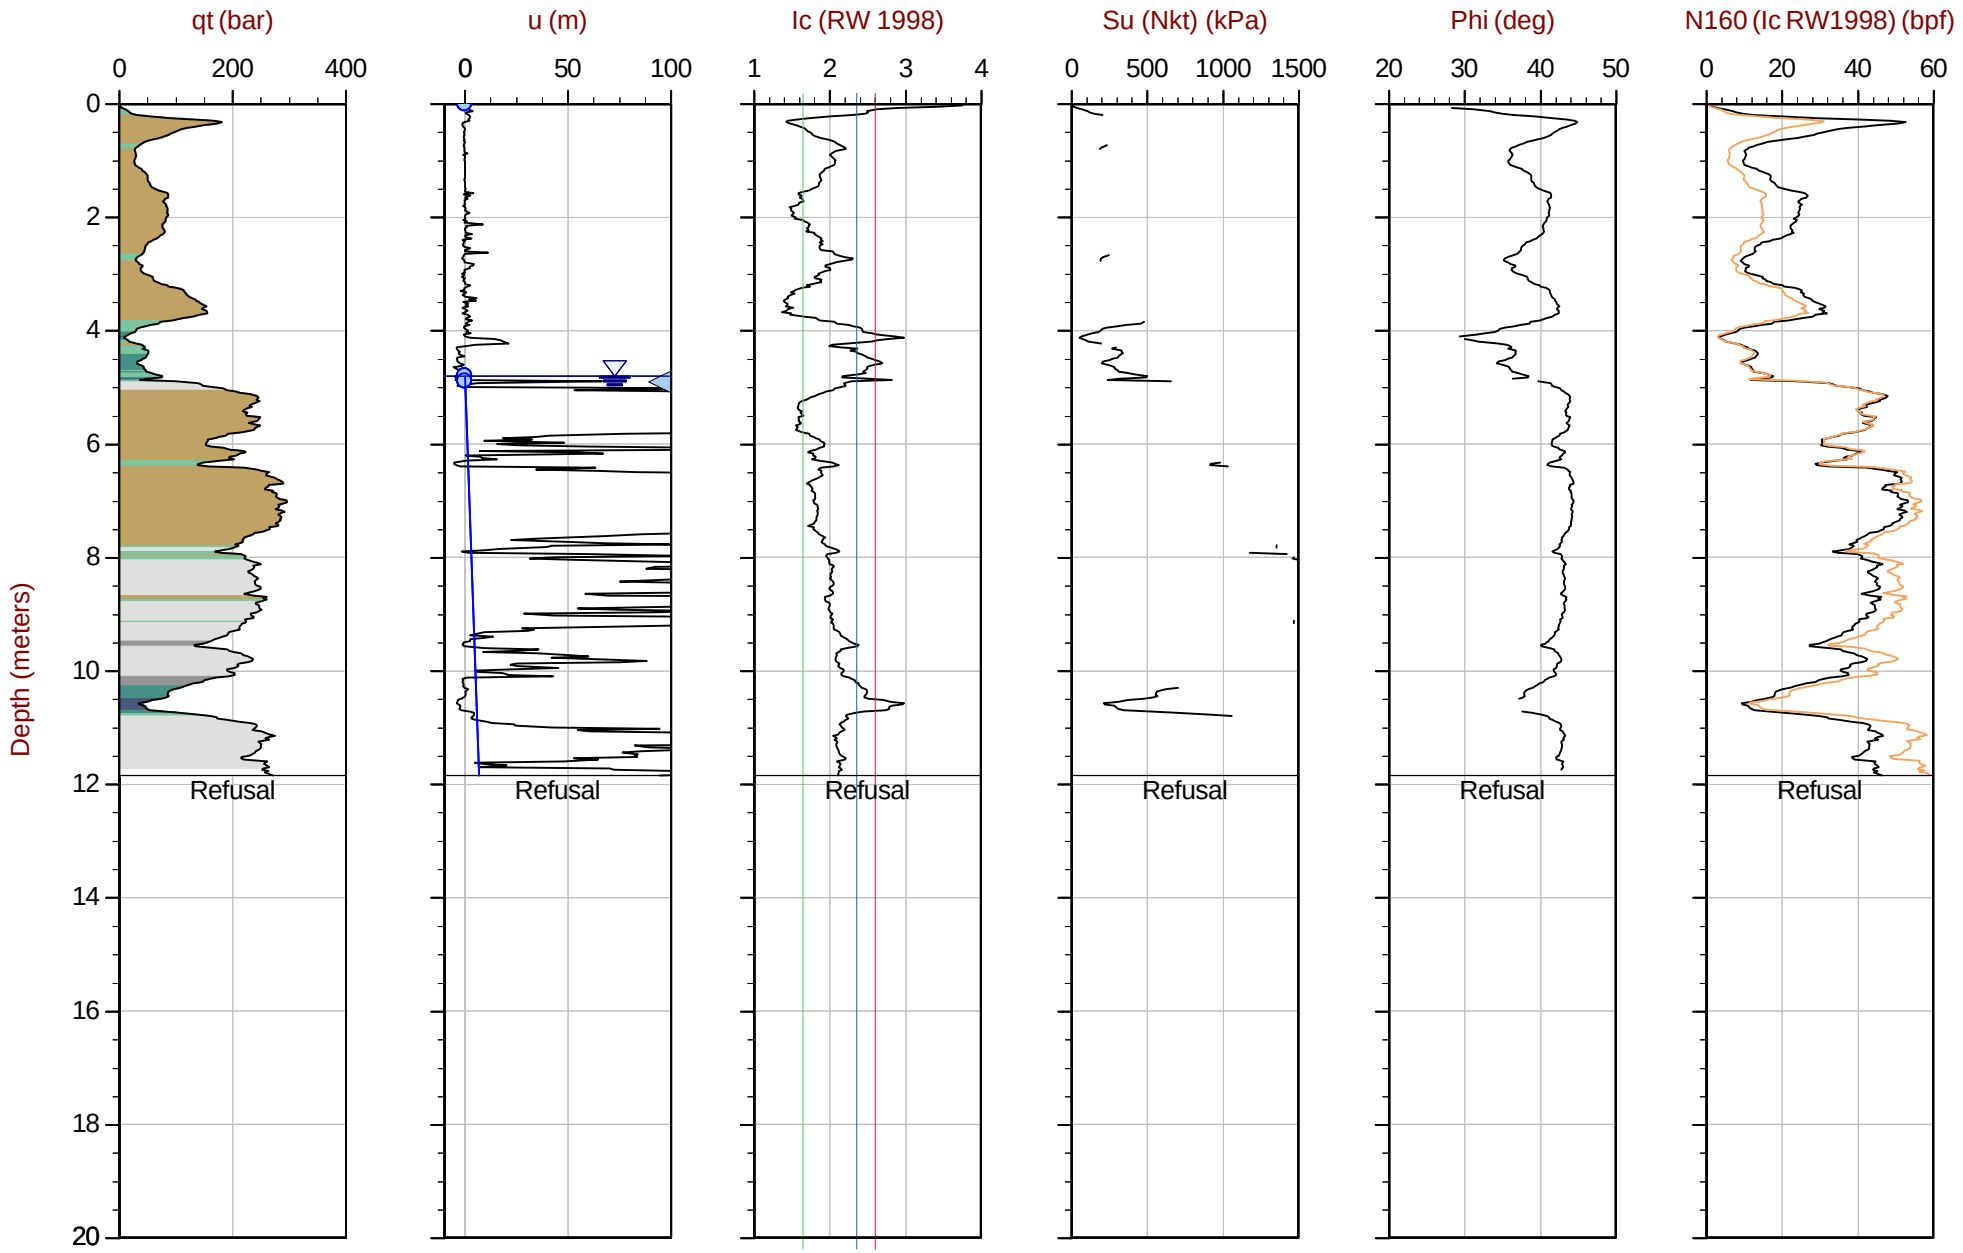

Max Depth: 11.850 m / 38.88 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT216.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611708m E: 416874m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 11:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT217
Cone: 854:T1500F15U35 Area= 15cm2

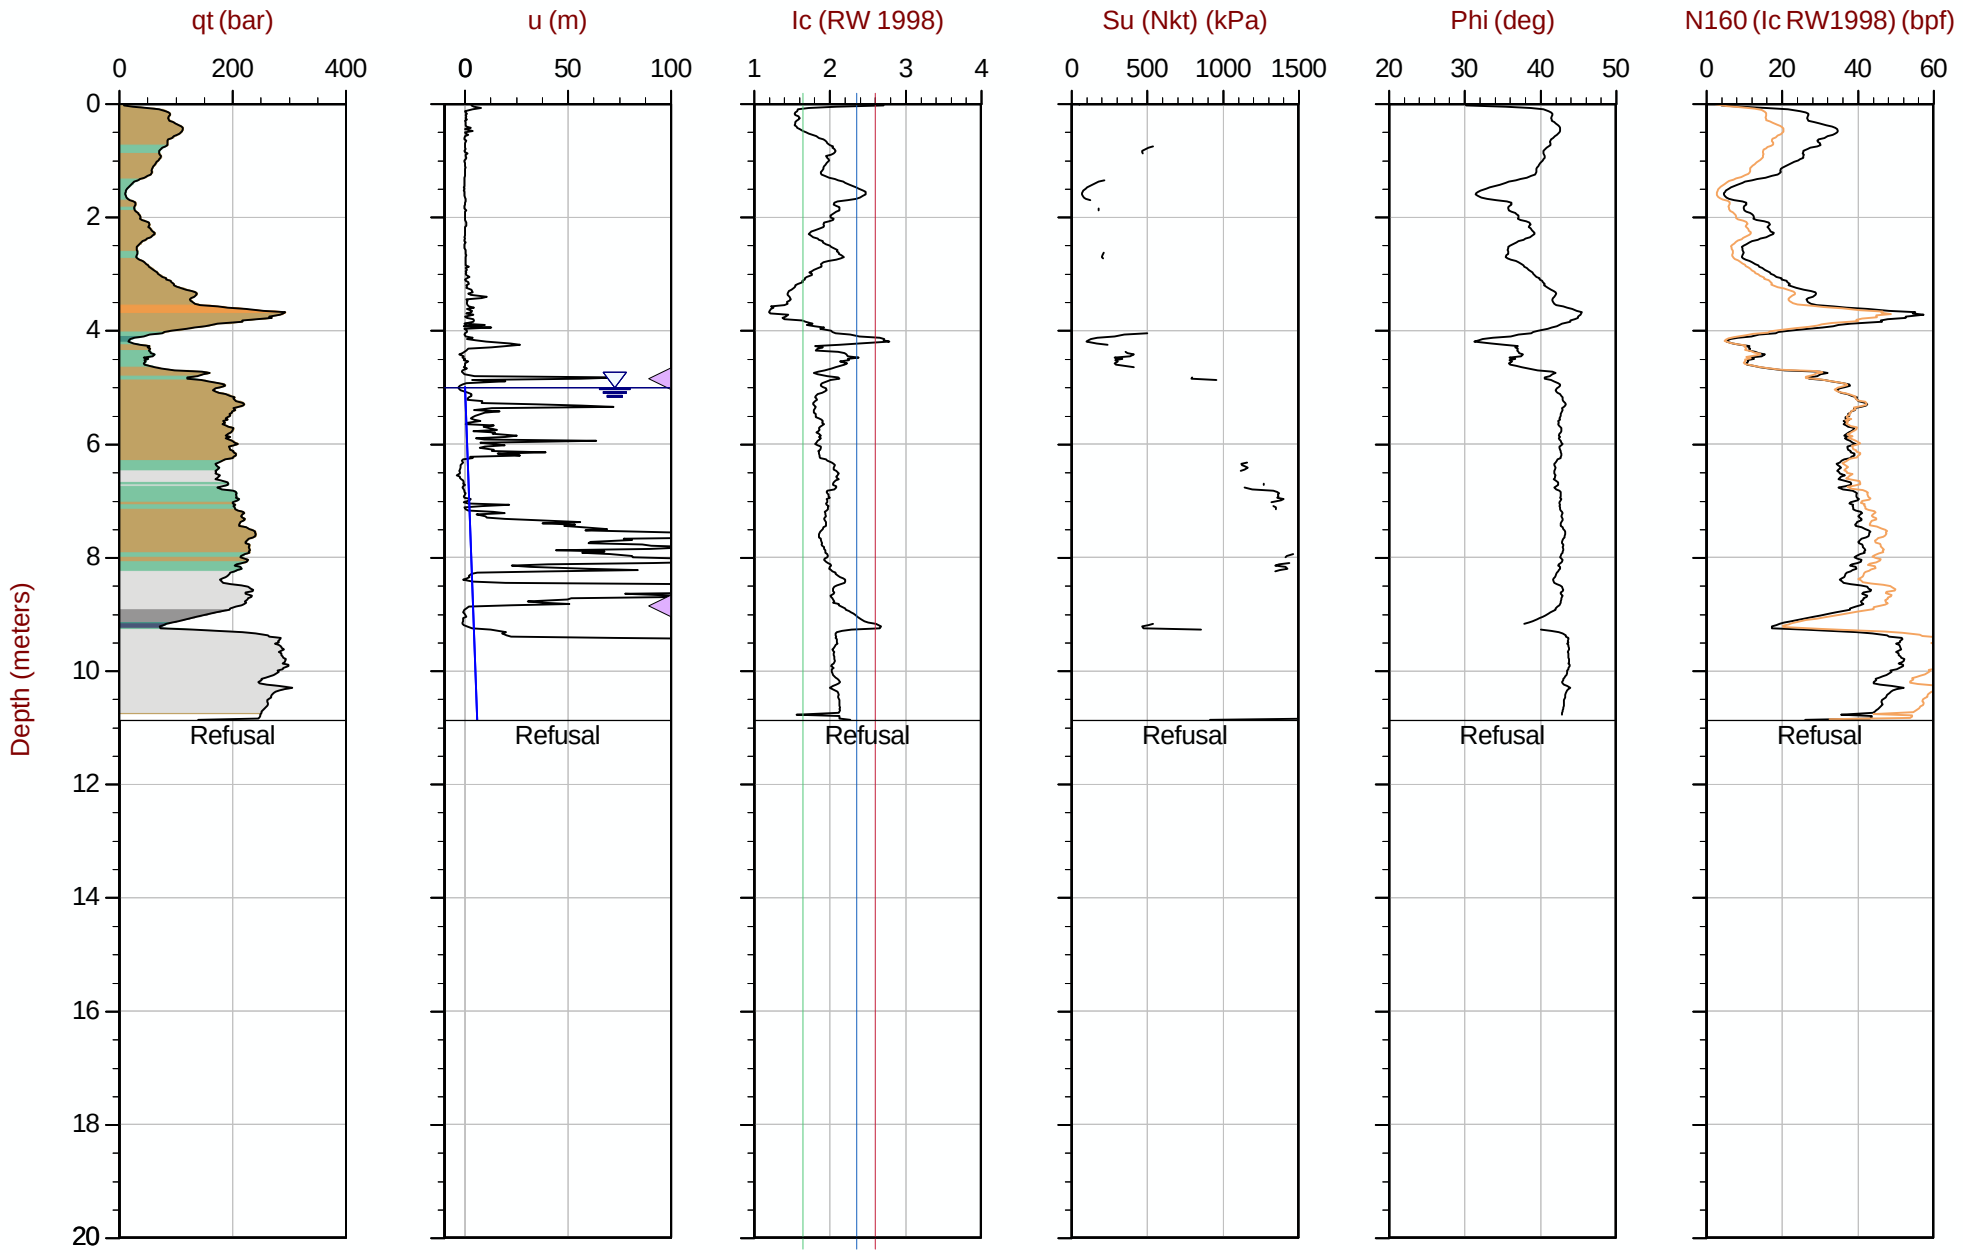

Max Depth: 10.875 m / 35.68 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT217.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611657m E: 416873m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT218
Cone: 854:T1500F15U35 Area= 15cm2

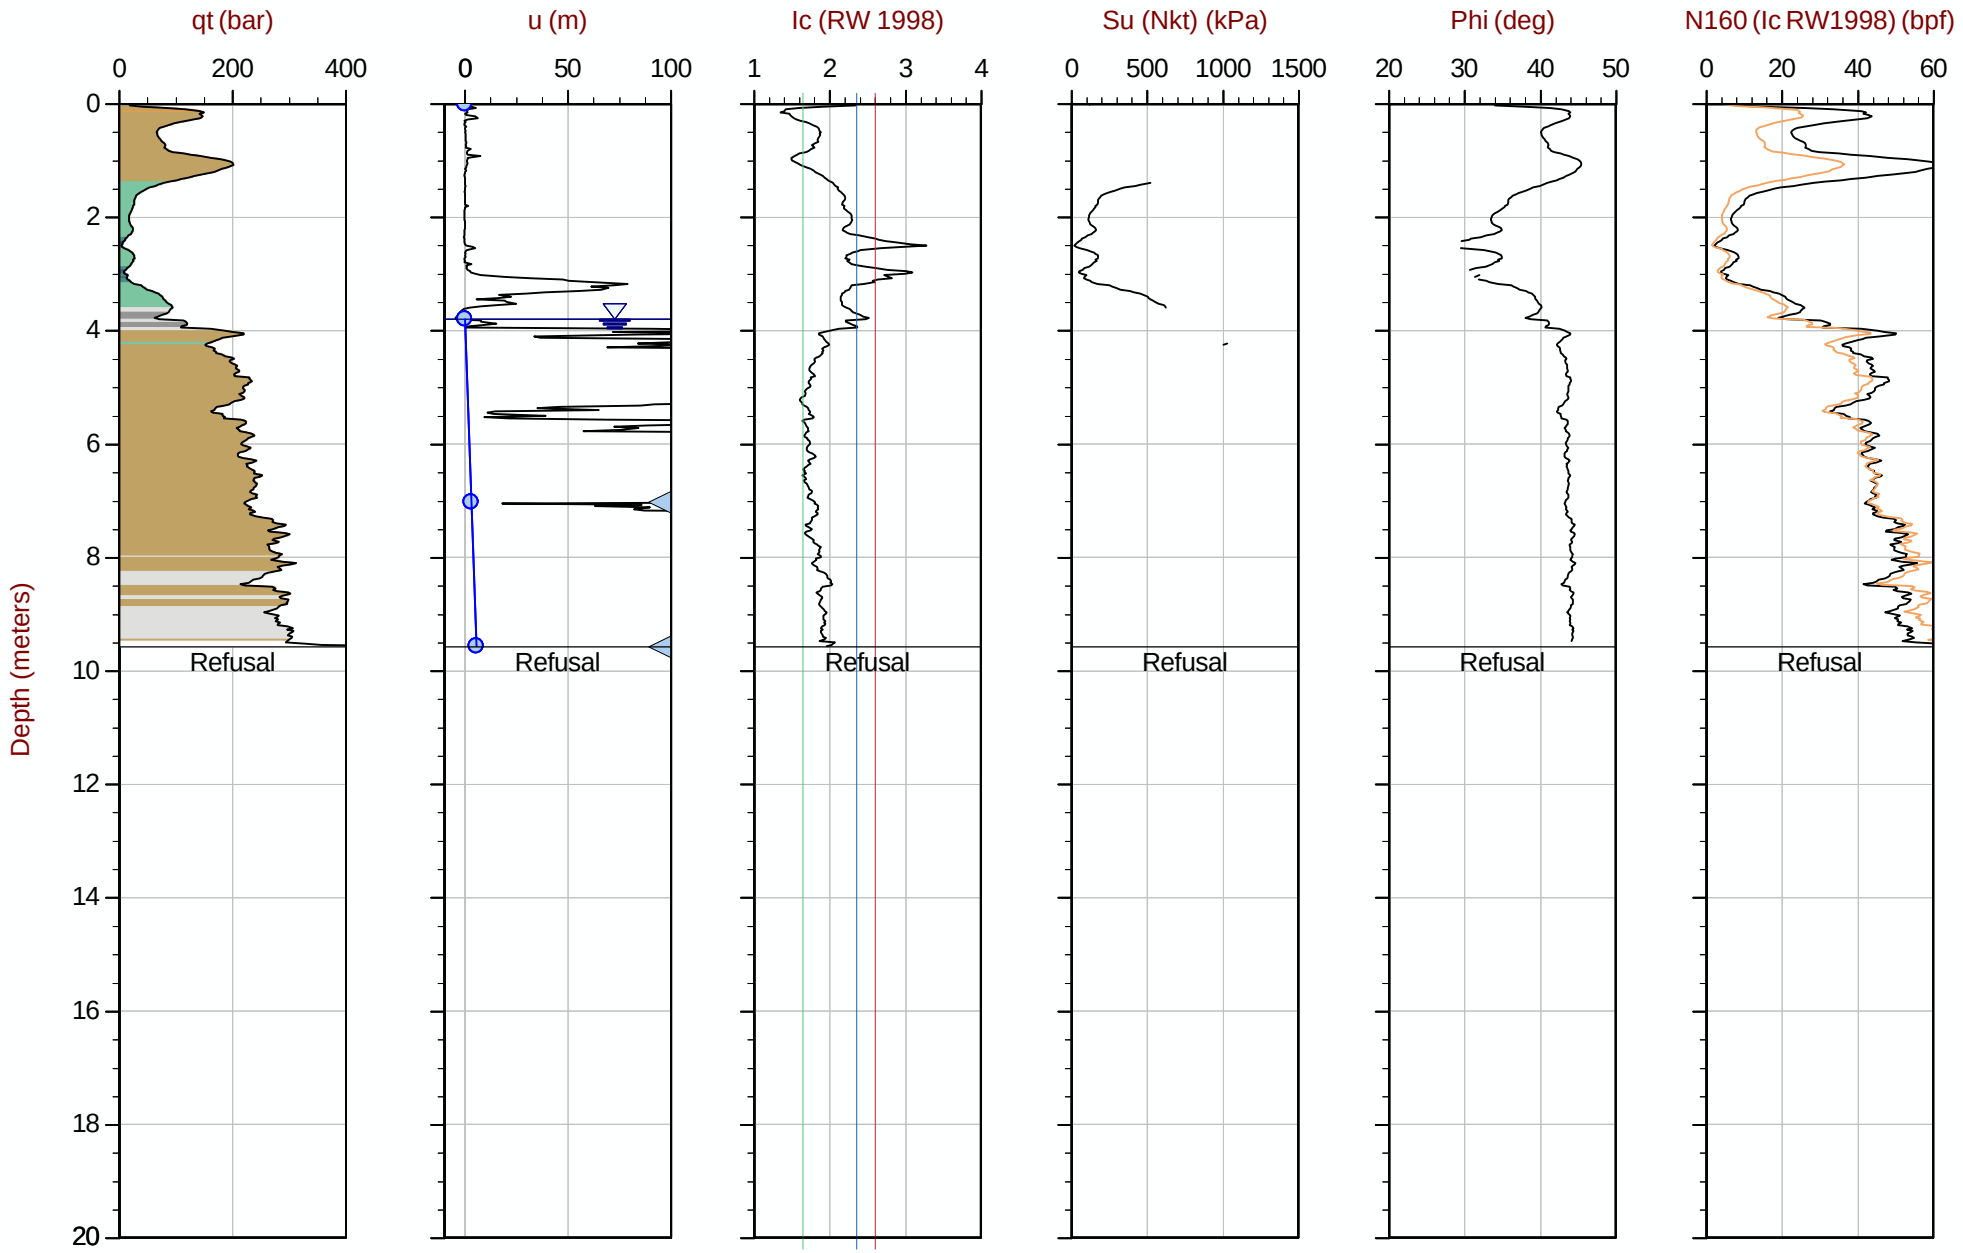

Max Depth: 9.575 m / 31.41 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT218.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611608m E: 416872m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 14:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT219
Cone: 854:T1500F15U35 Area= 15cm2

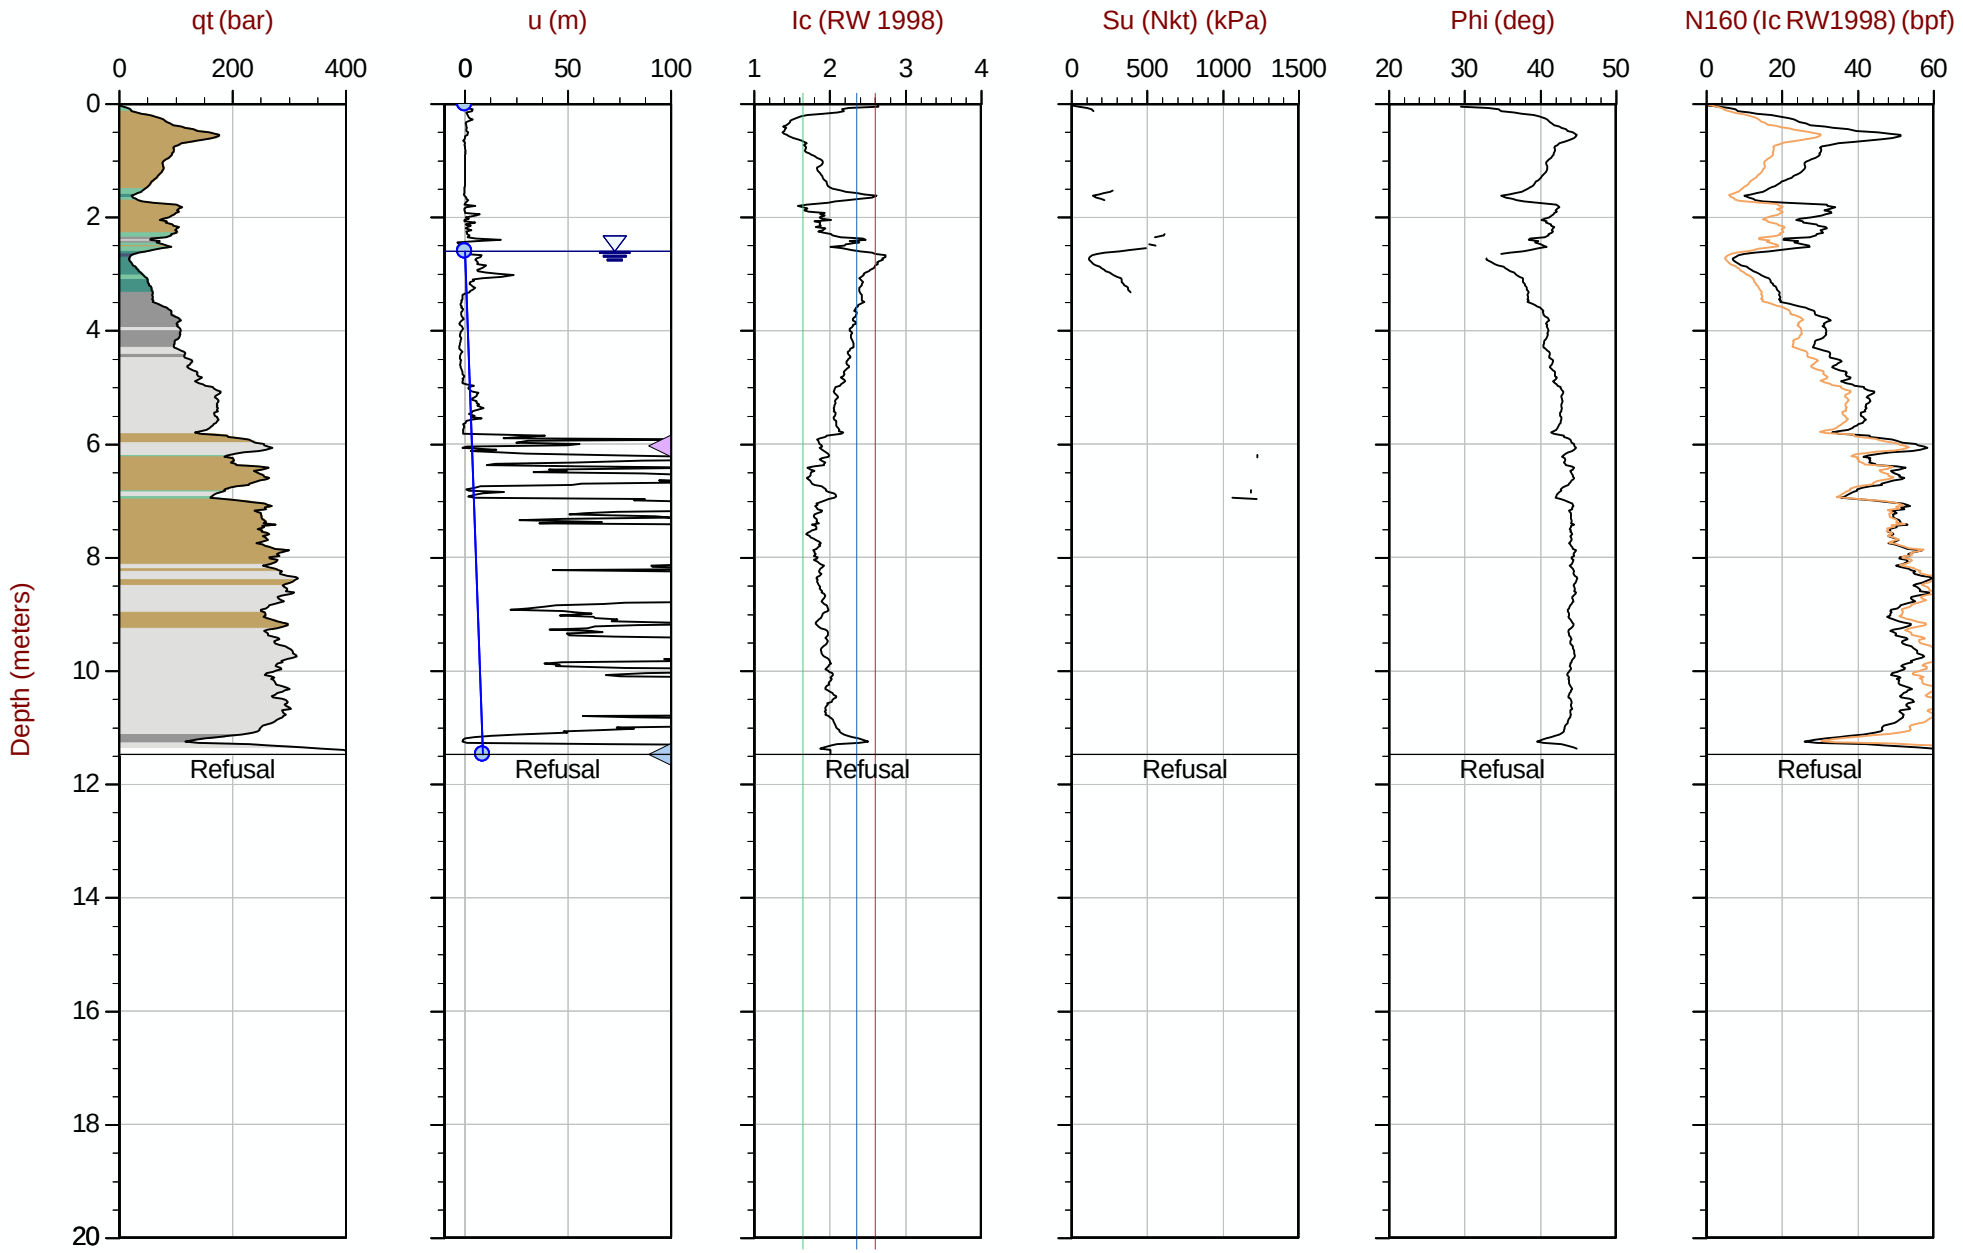

Max Depth: 11.475 m / 37.65 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT219.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611557m E: 416870m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 15:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT220
Cone: 854:T1500F15U35 Area= 15cm2

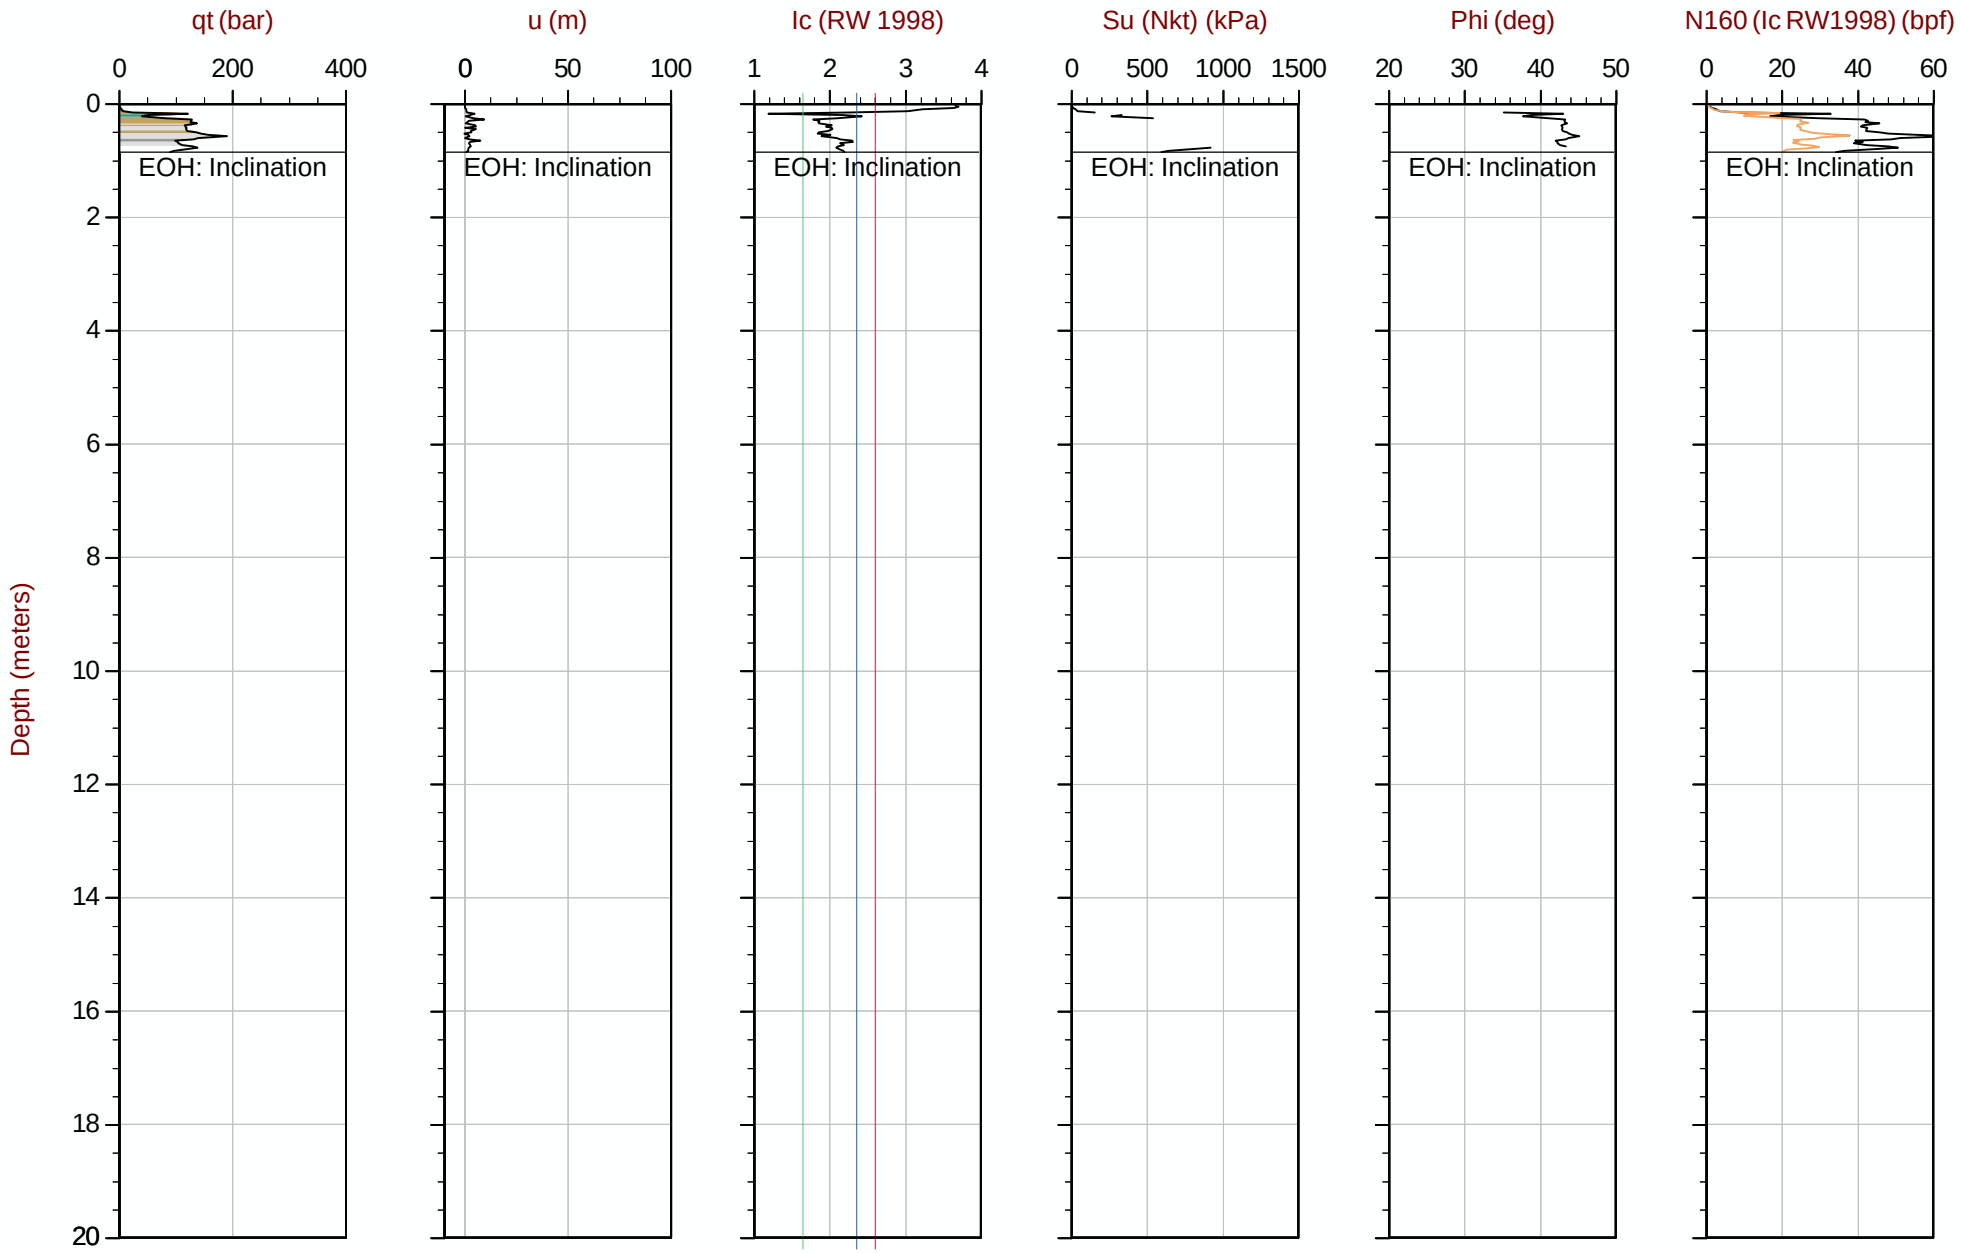

Max Depth: 0.850 m / 2.79 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT220.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611508m E: 416869m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 16:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT220B
Cone: 854:T1500F15U35 Area= 15cm2

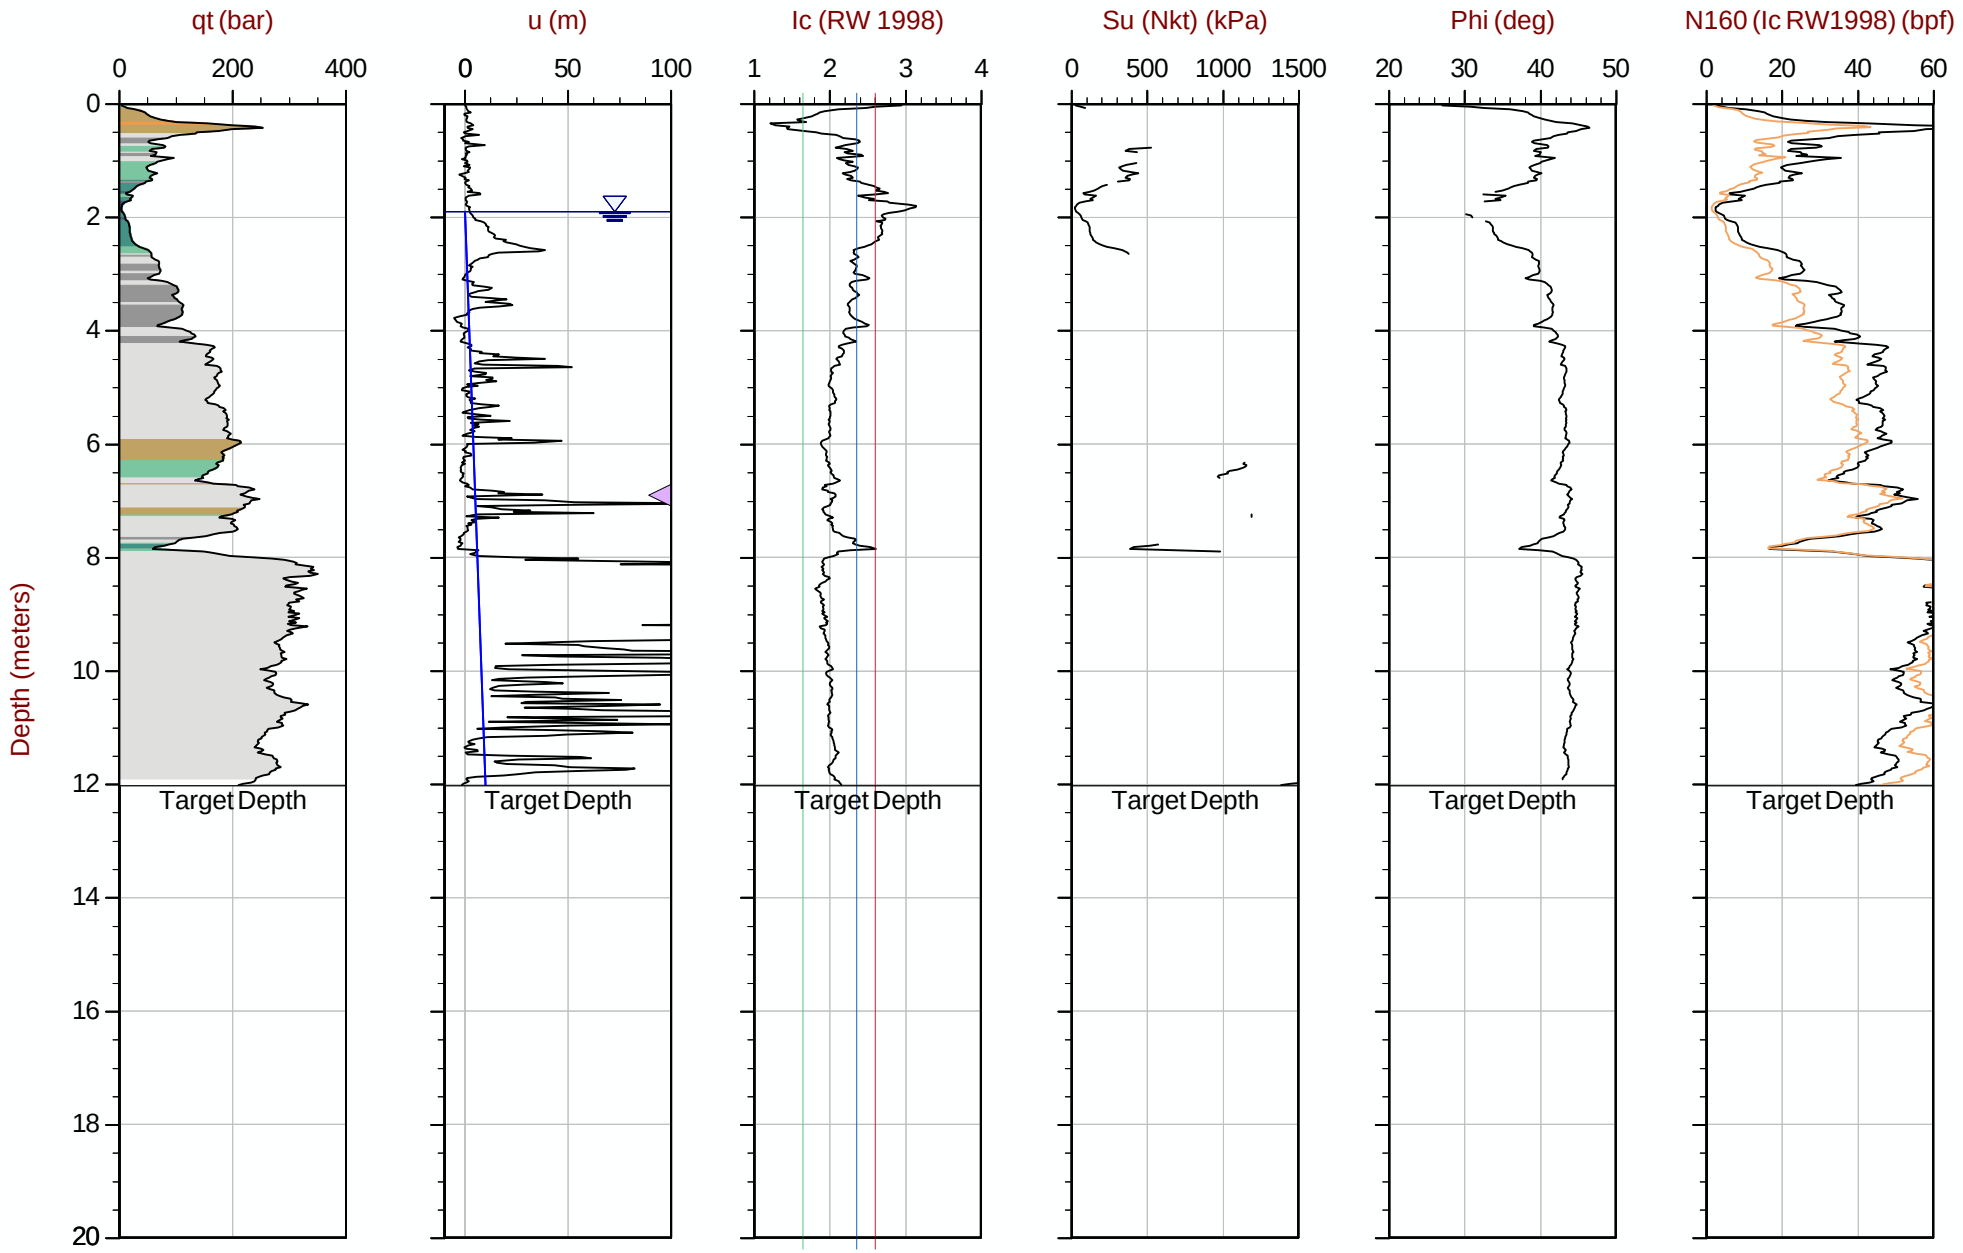

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT220B.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611509m E: 416869m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 17:44
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT221
Cone: 854:T1500F15U35 Area= 15cm2

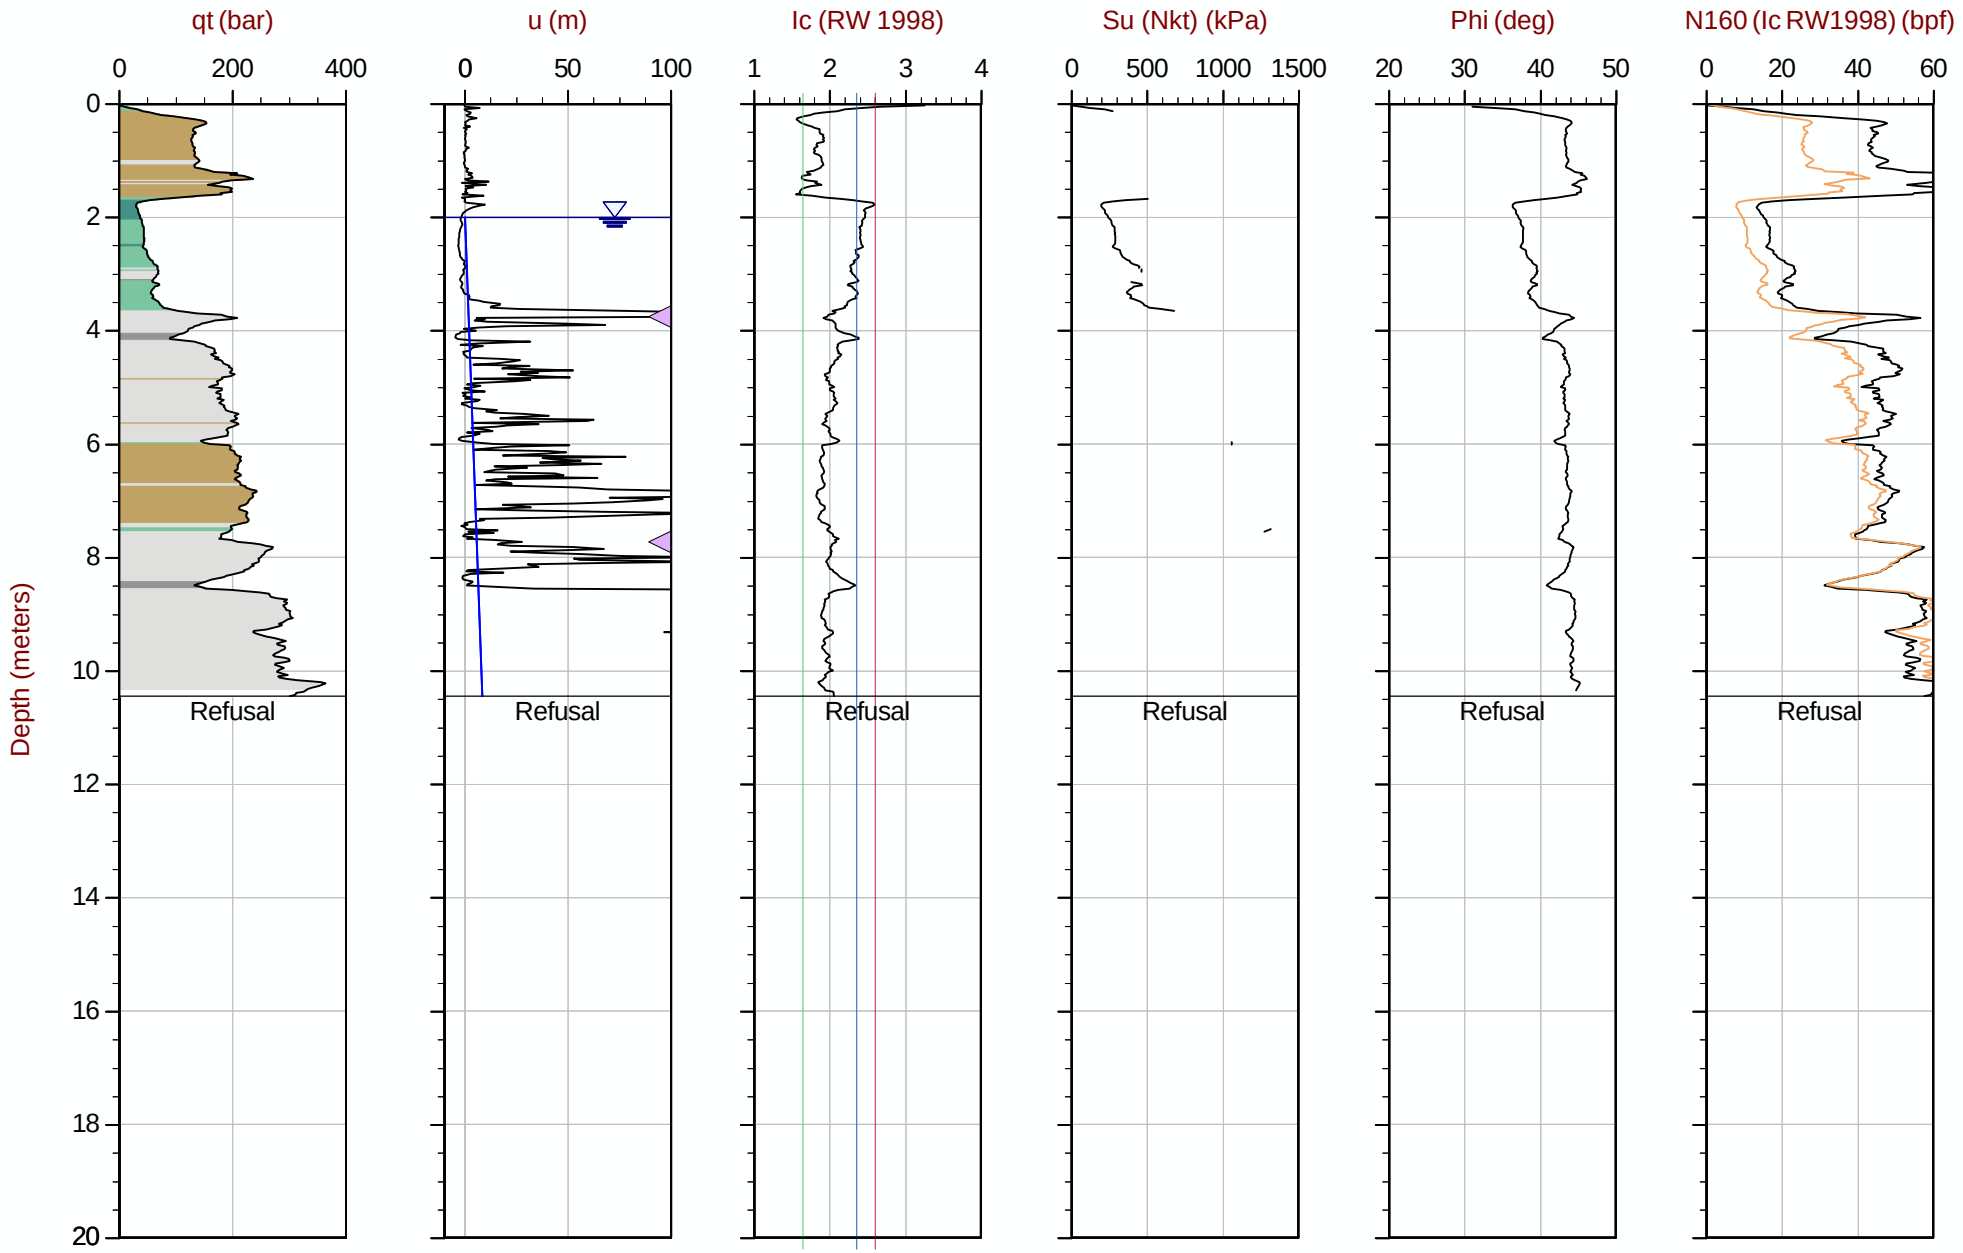

Max Depth: 10.450 m / 34.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT221.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611457m E: 416868m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 06:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT222
Cone: 854:T1500F15U35 Area= 15cm2

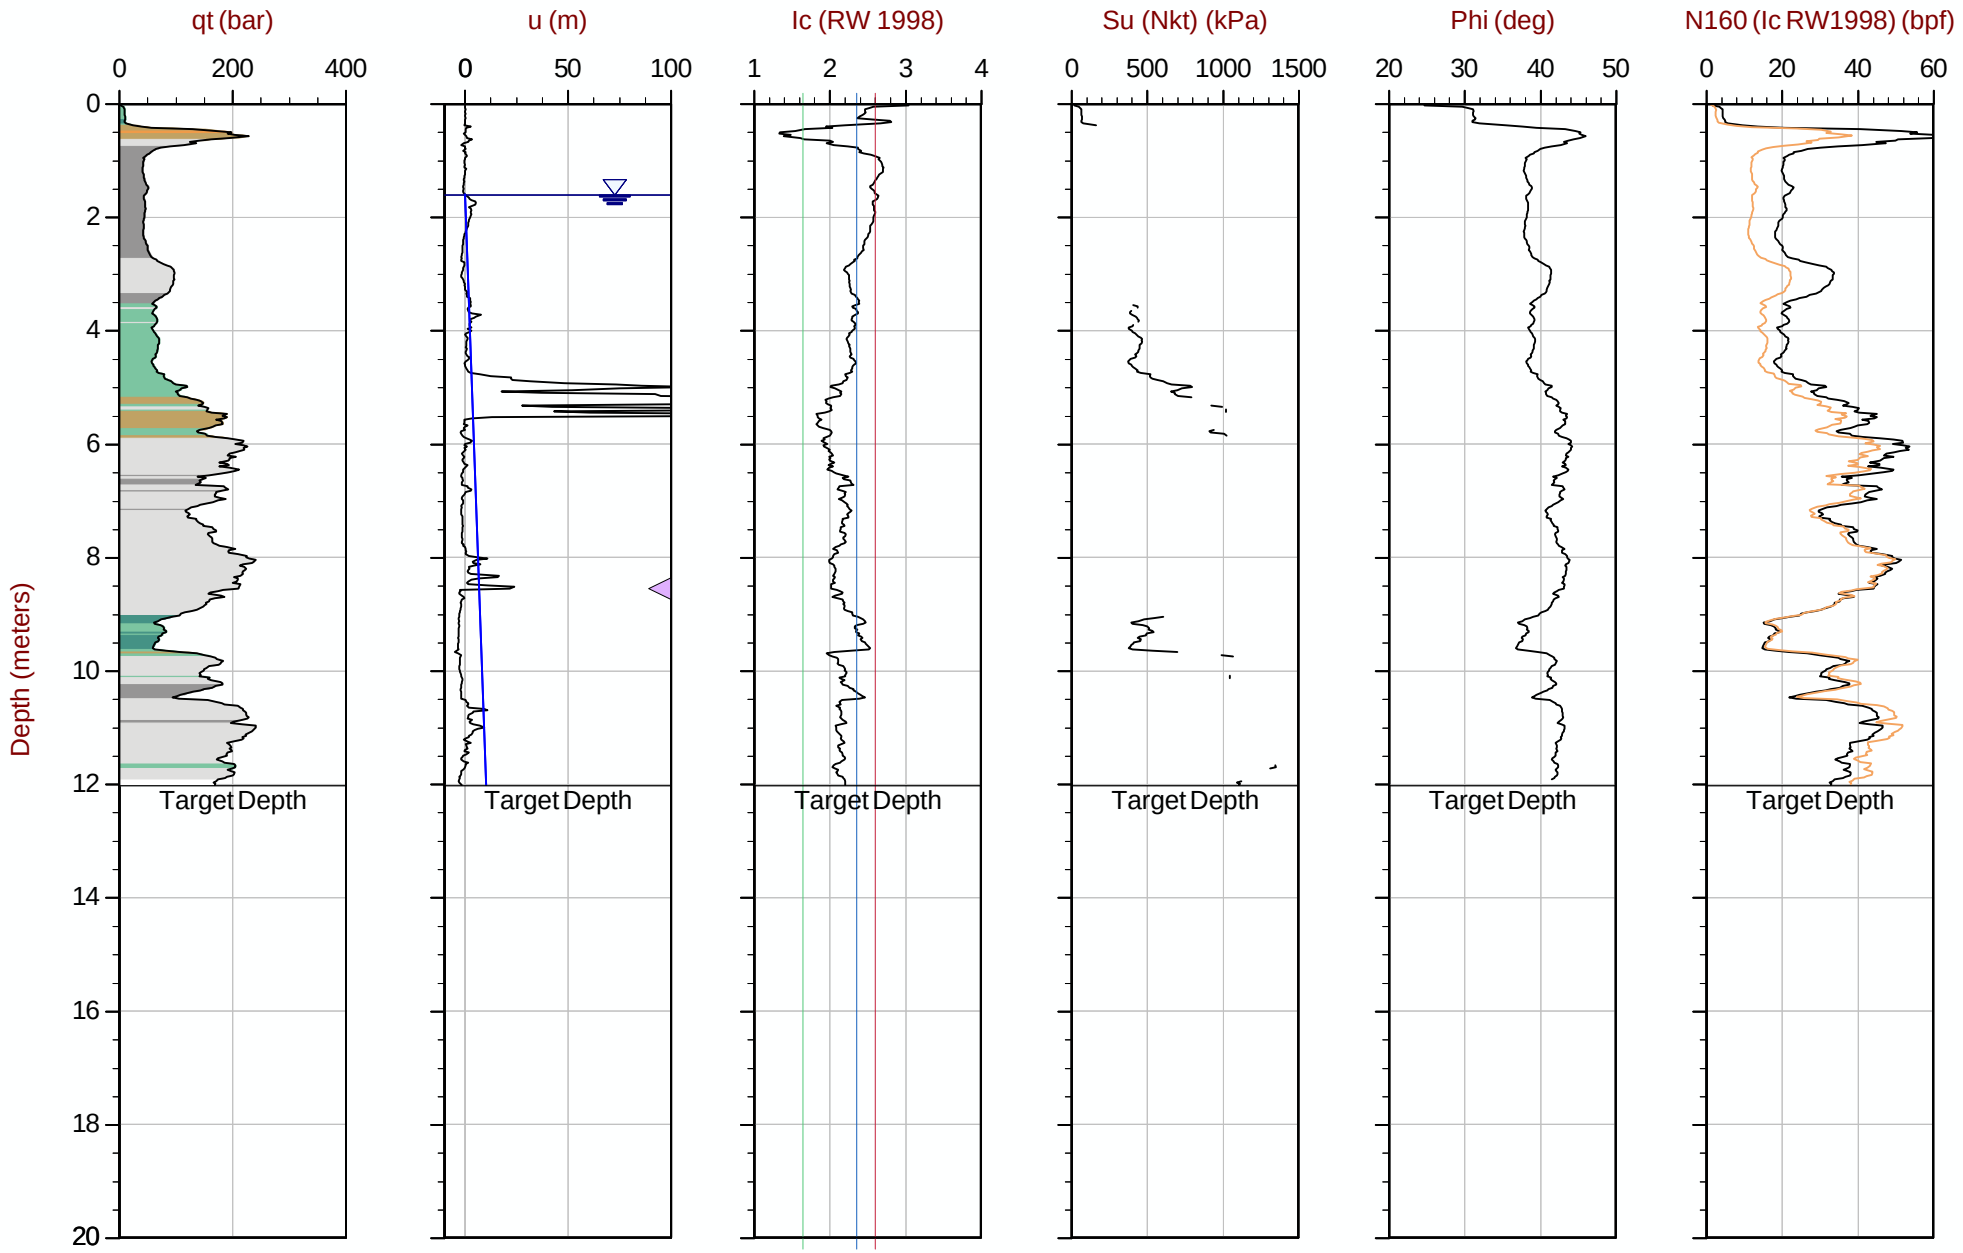

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT222.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611408m E: 416867m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 07:33
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT223
Cone: 854:T1500F15U35 Area= 15cm2

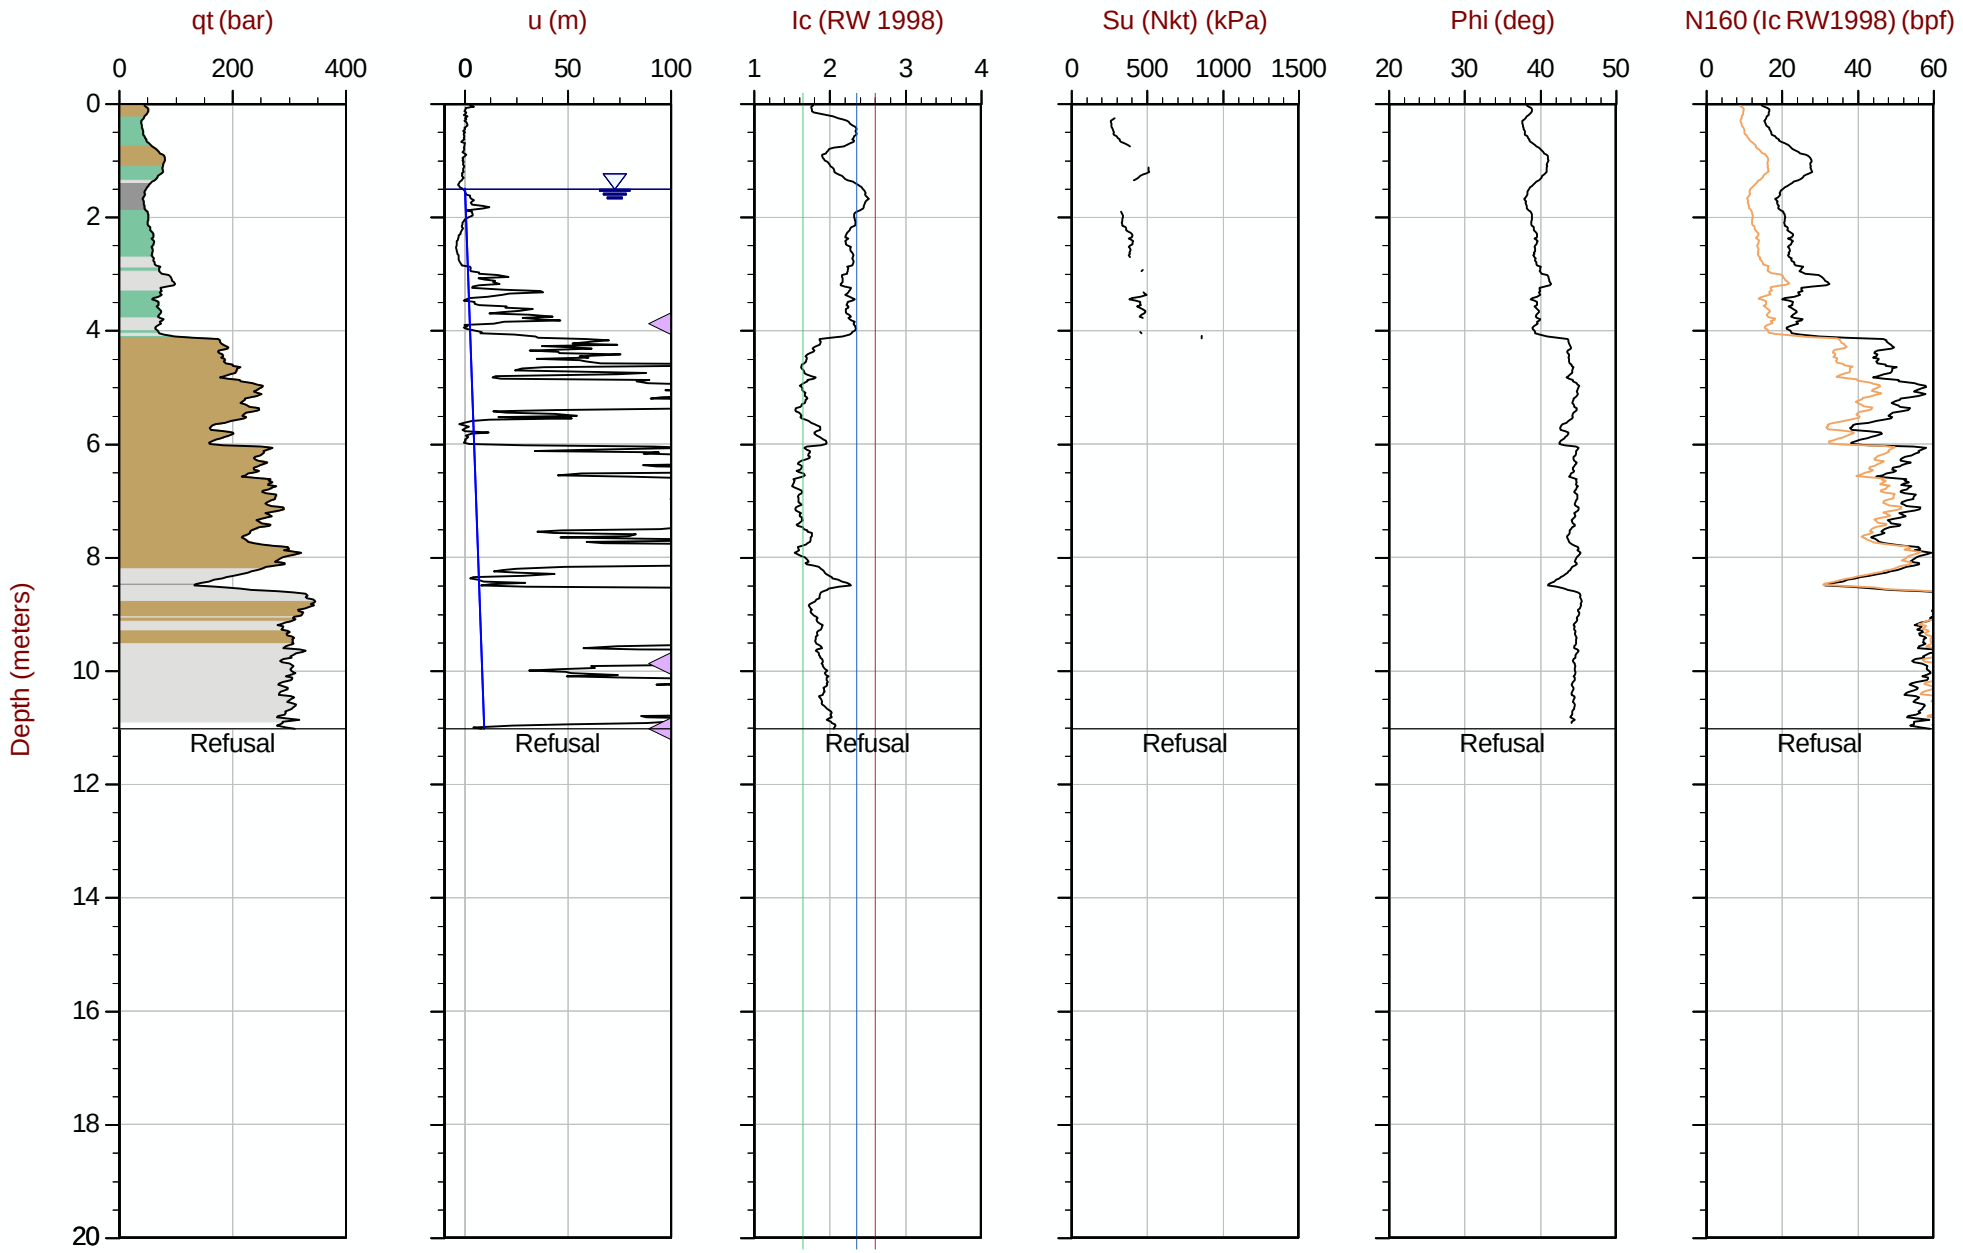

Max Depth: 11.025 m / 36.17 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT223.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611357m E: 416865m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 09:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT224
Cone: 854:T1500F15U35 Area= 15cm2

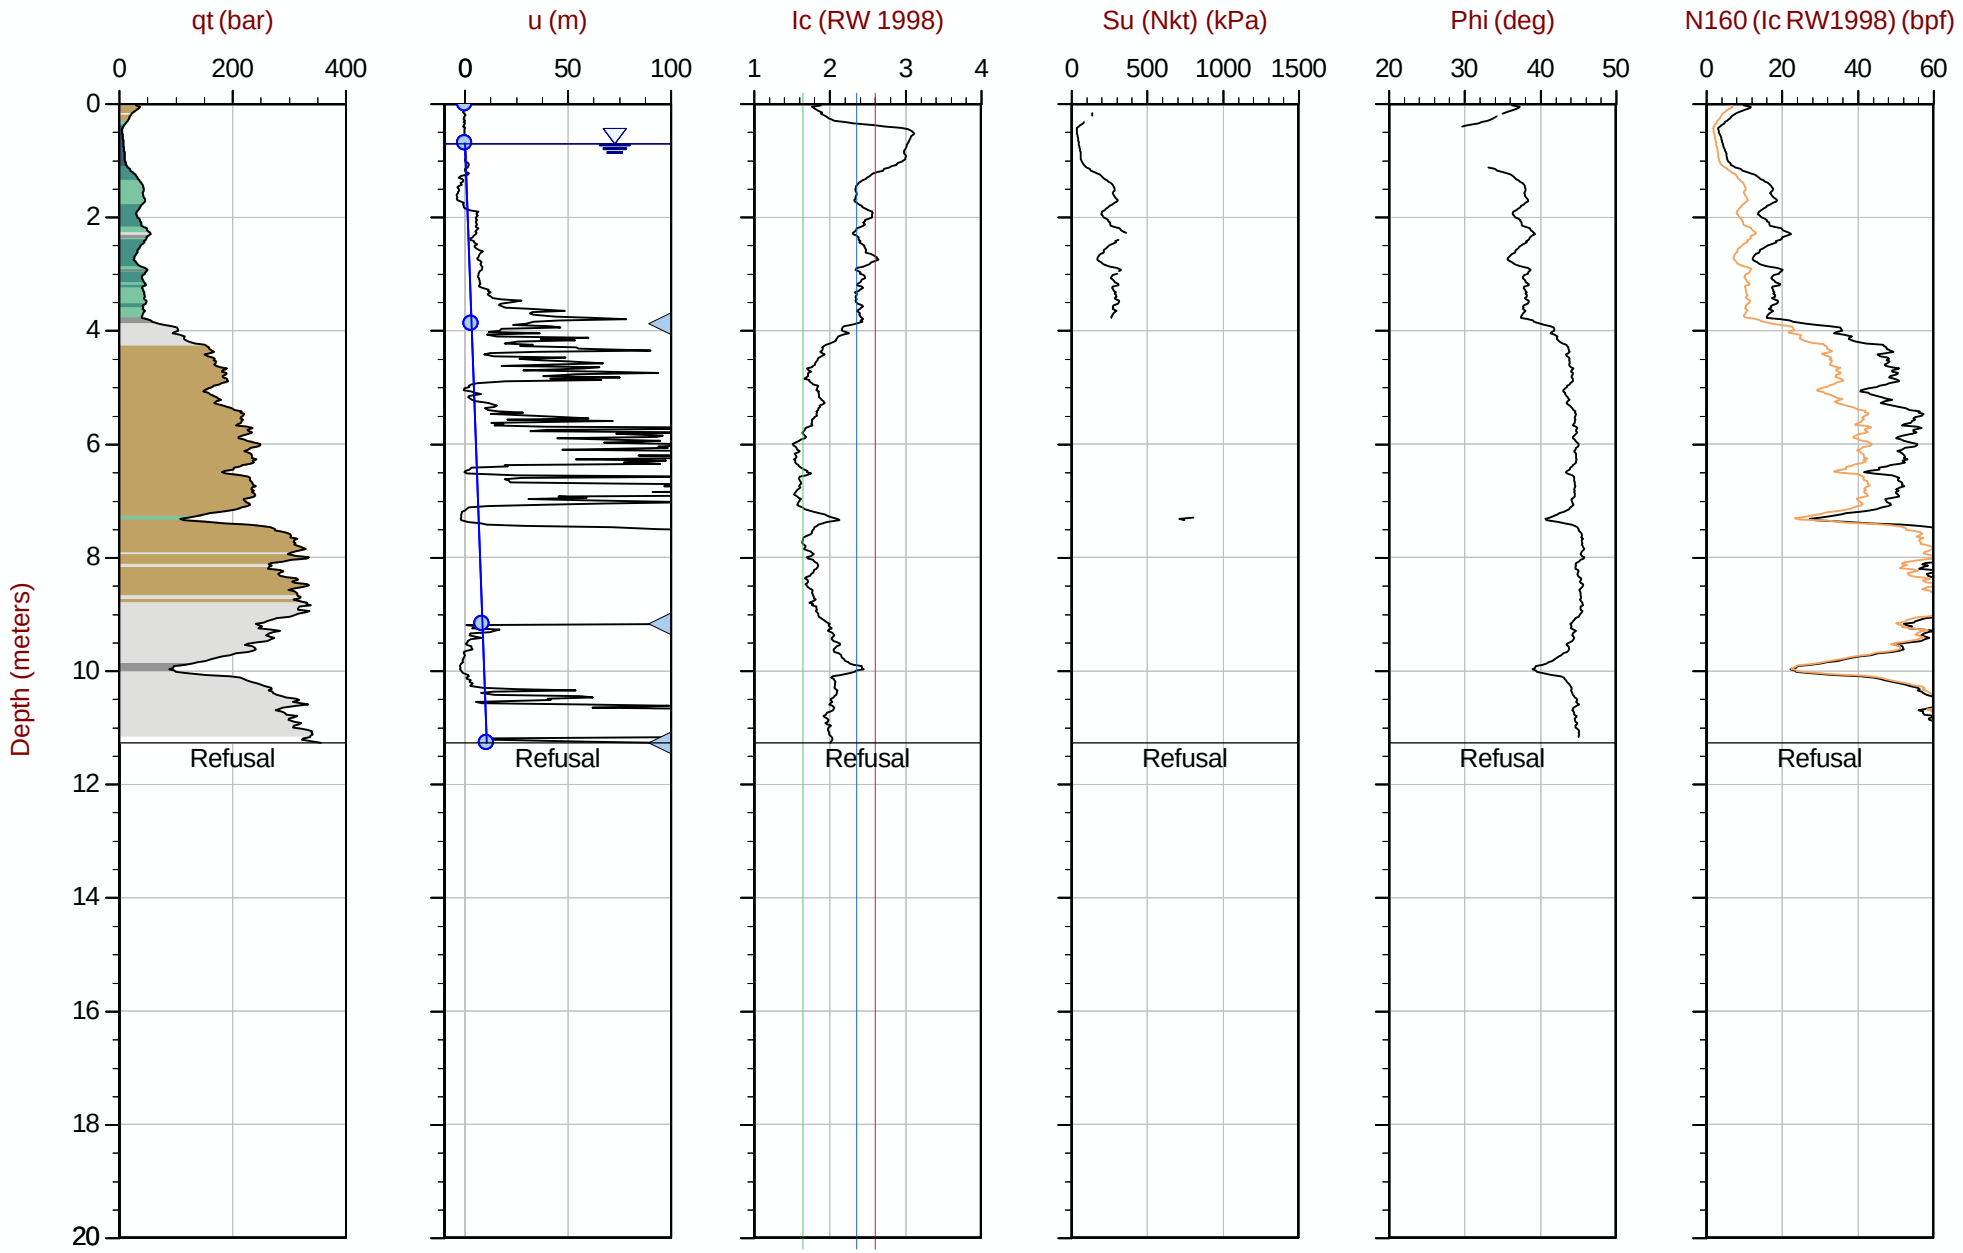

Max Depth: 11.275 m / 36.99 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT224.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611308m E: 416864m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 06:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT225
Cone: 821:T1000F10U35 Area= 15cm2

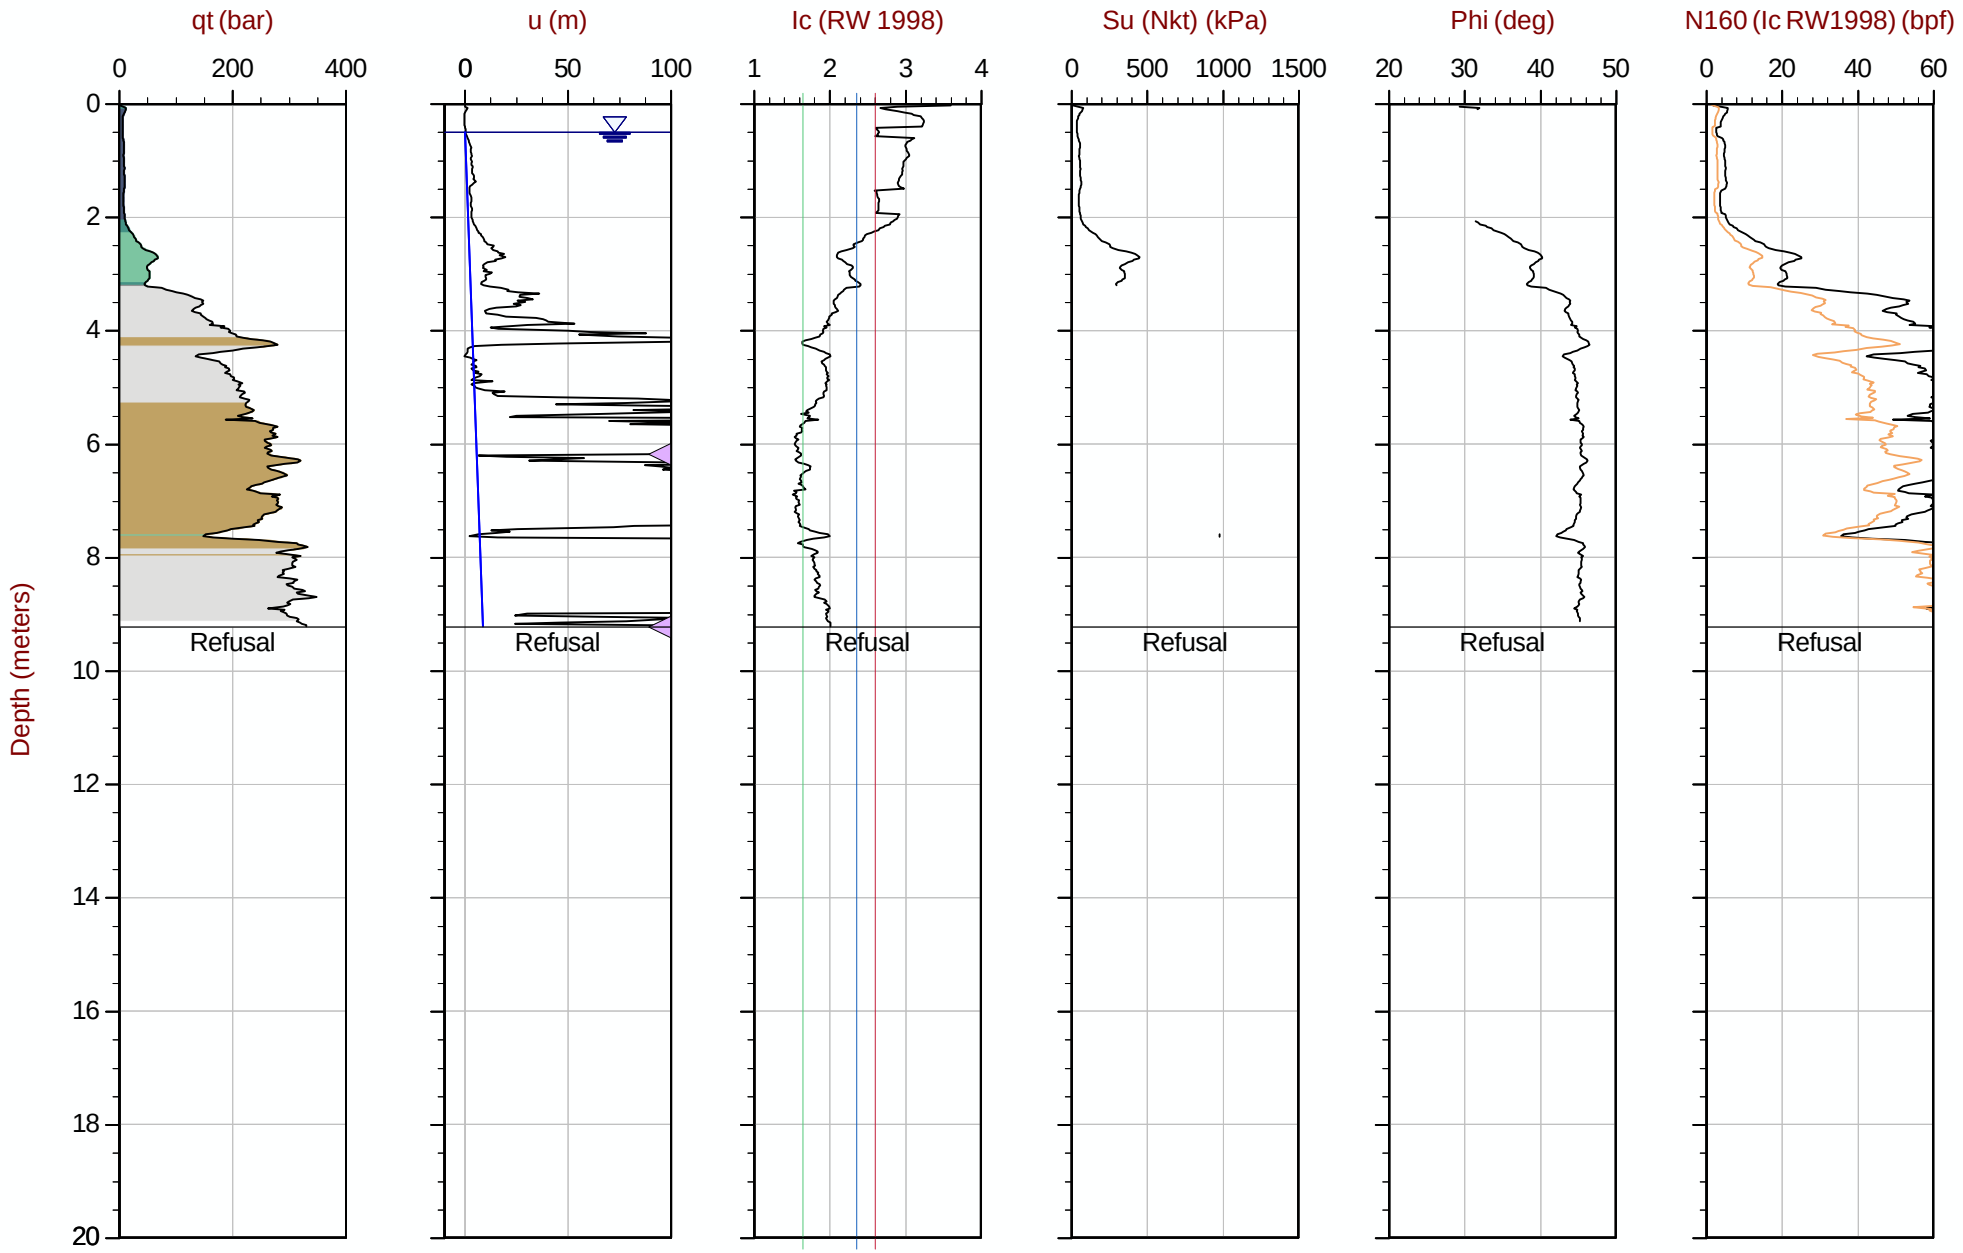

Max Depth: 9.225 m / 30.27 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT225.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611257m E: 416863m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 11:08
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT226
Cone: 854:T1500F15U35 Area= 15cm2

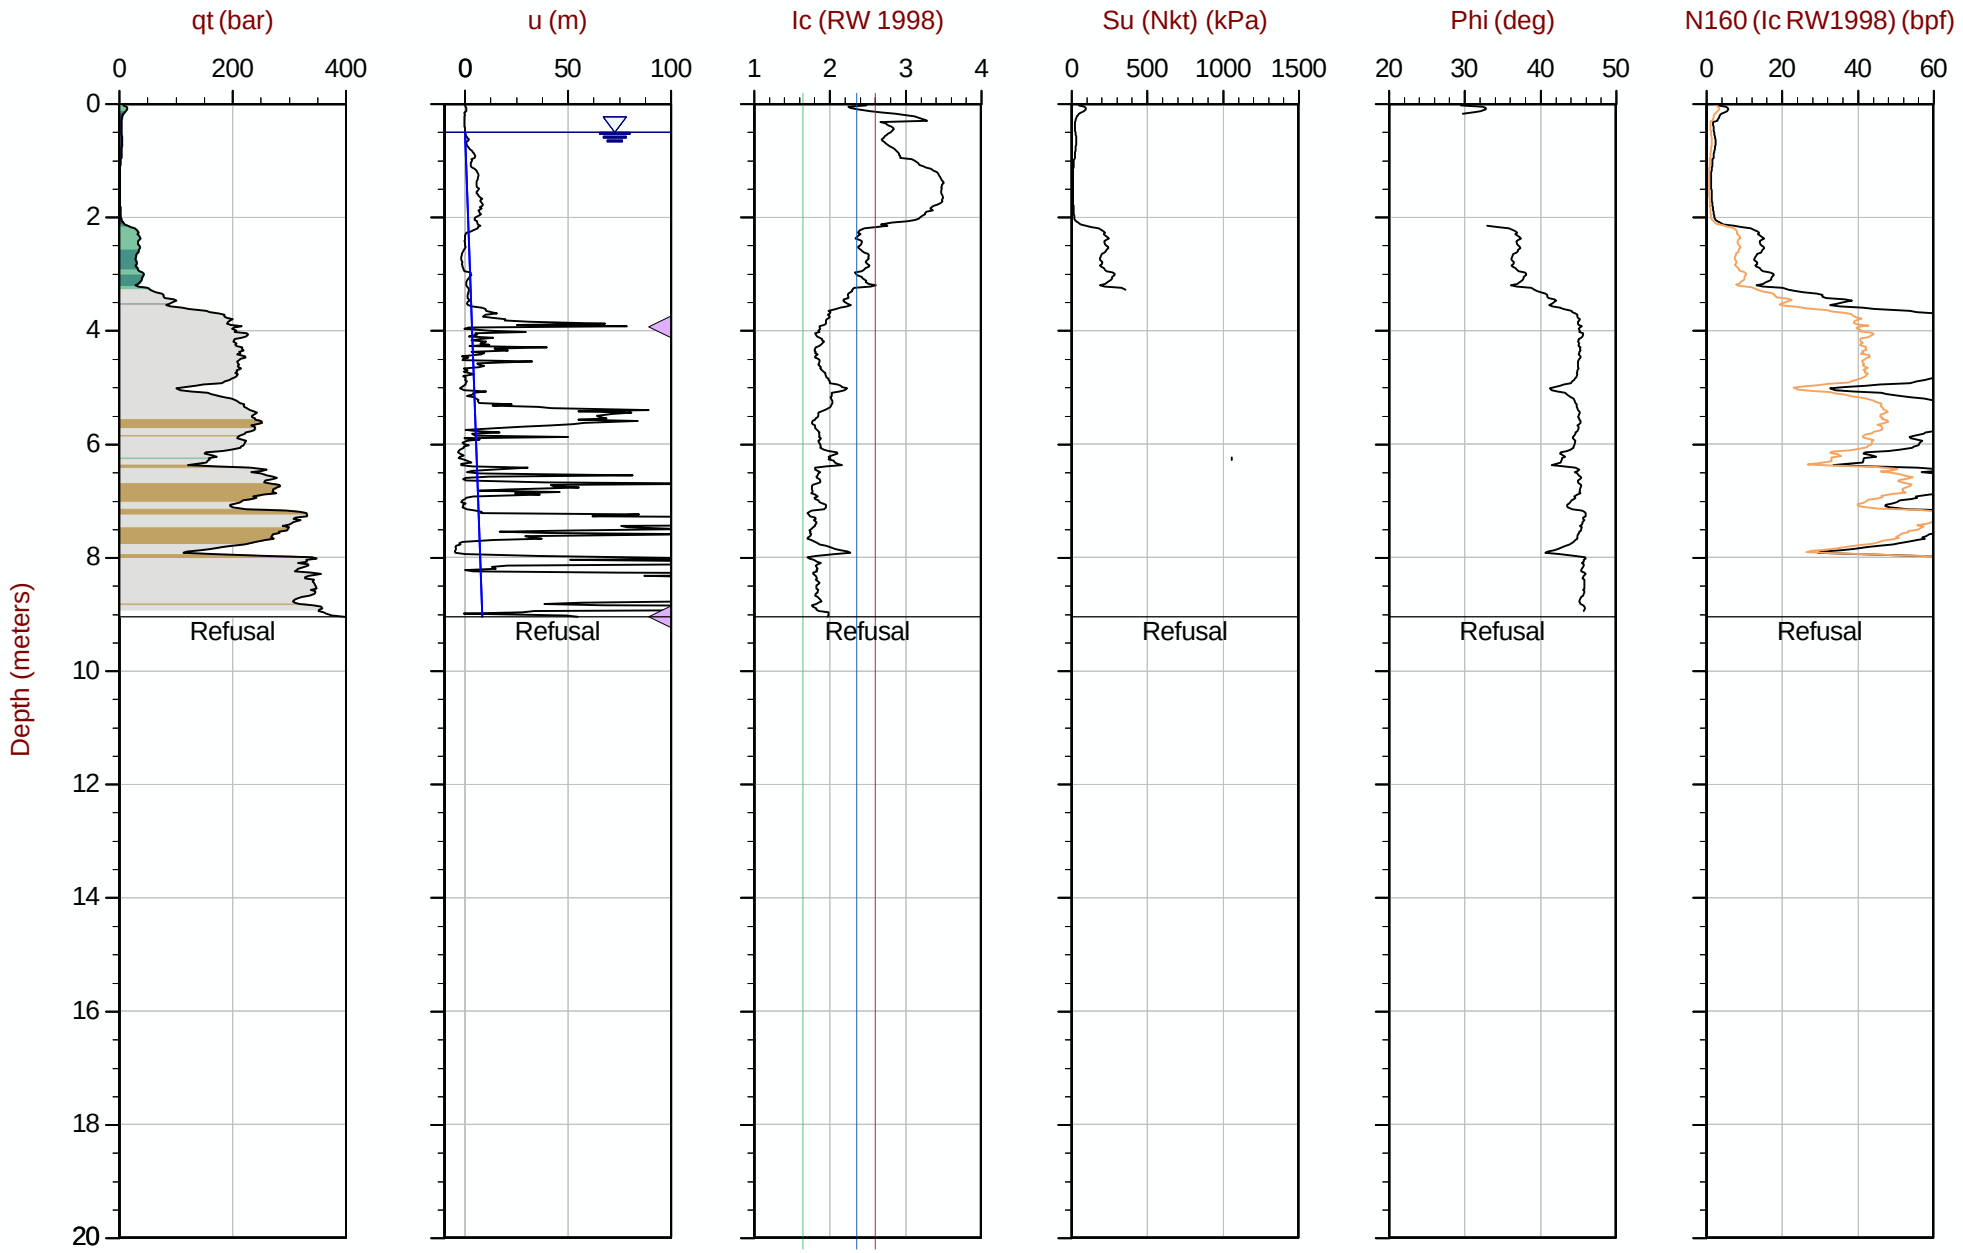

Max Depth: 9.050 m / 29.69 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT226.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611208m E: 416862m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 12:42
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT227
Cone: 854:T1500F15U35 Area= 15cm2

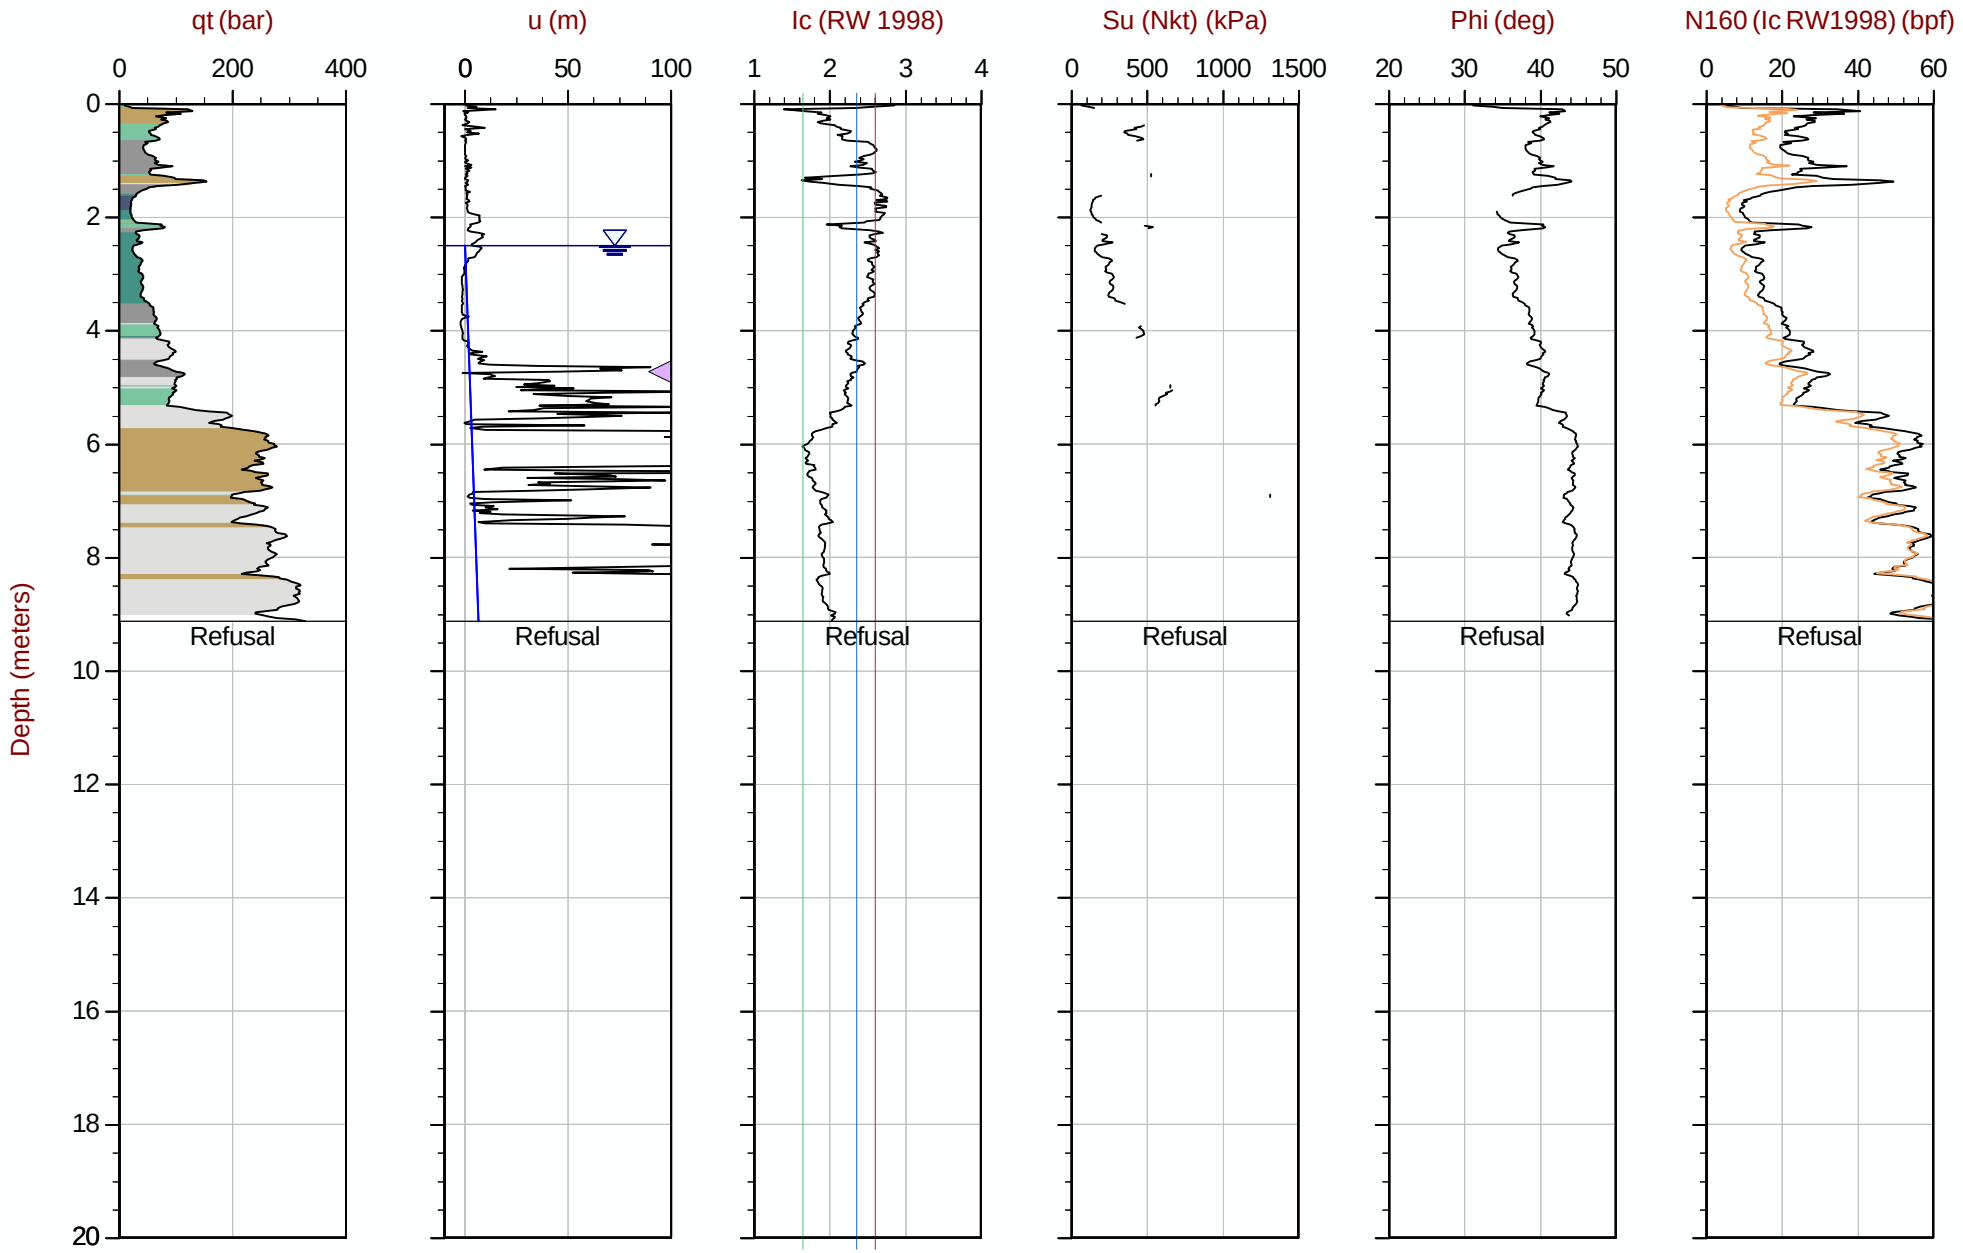

Max Depth: 9.125 m / 29.94 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT227.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611150m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 13:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228
Cone: 854:T1500F15U35 Area= 15cm2

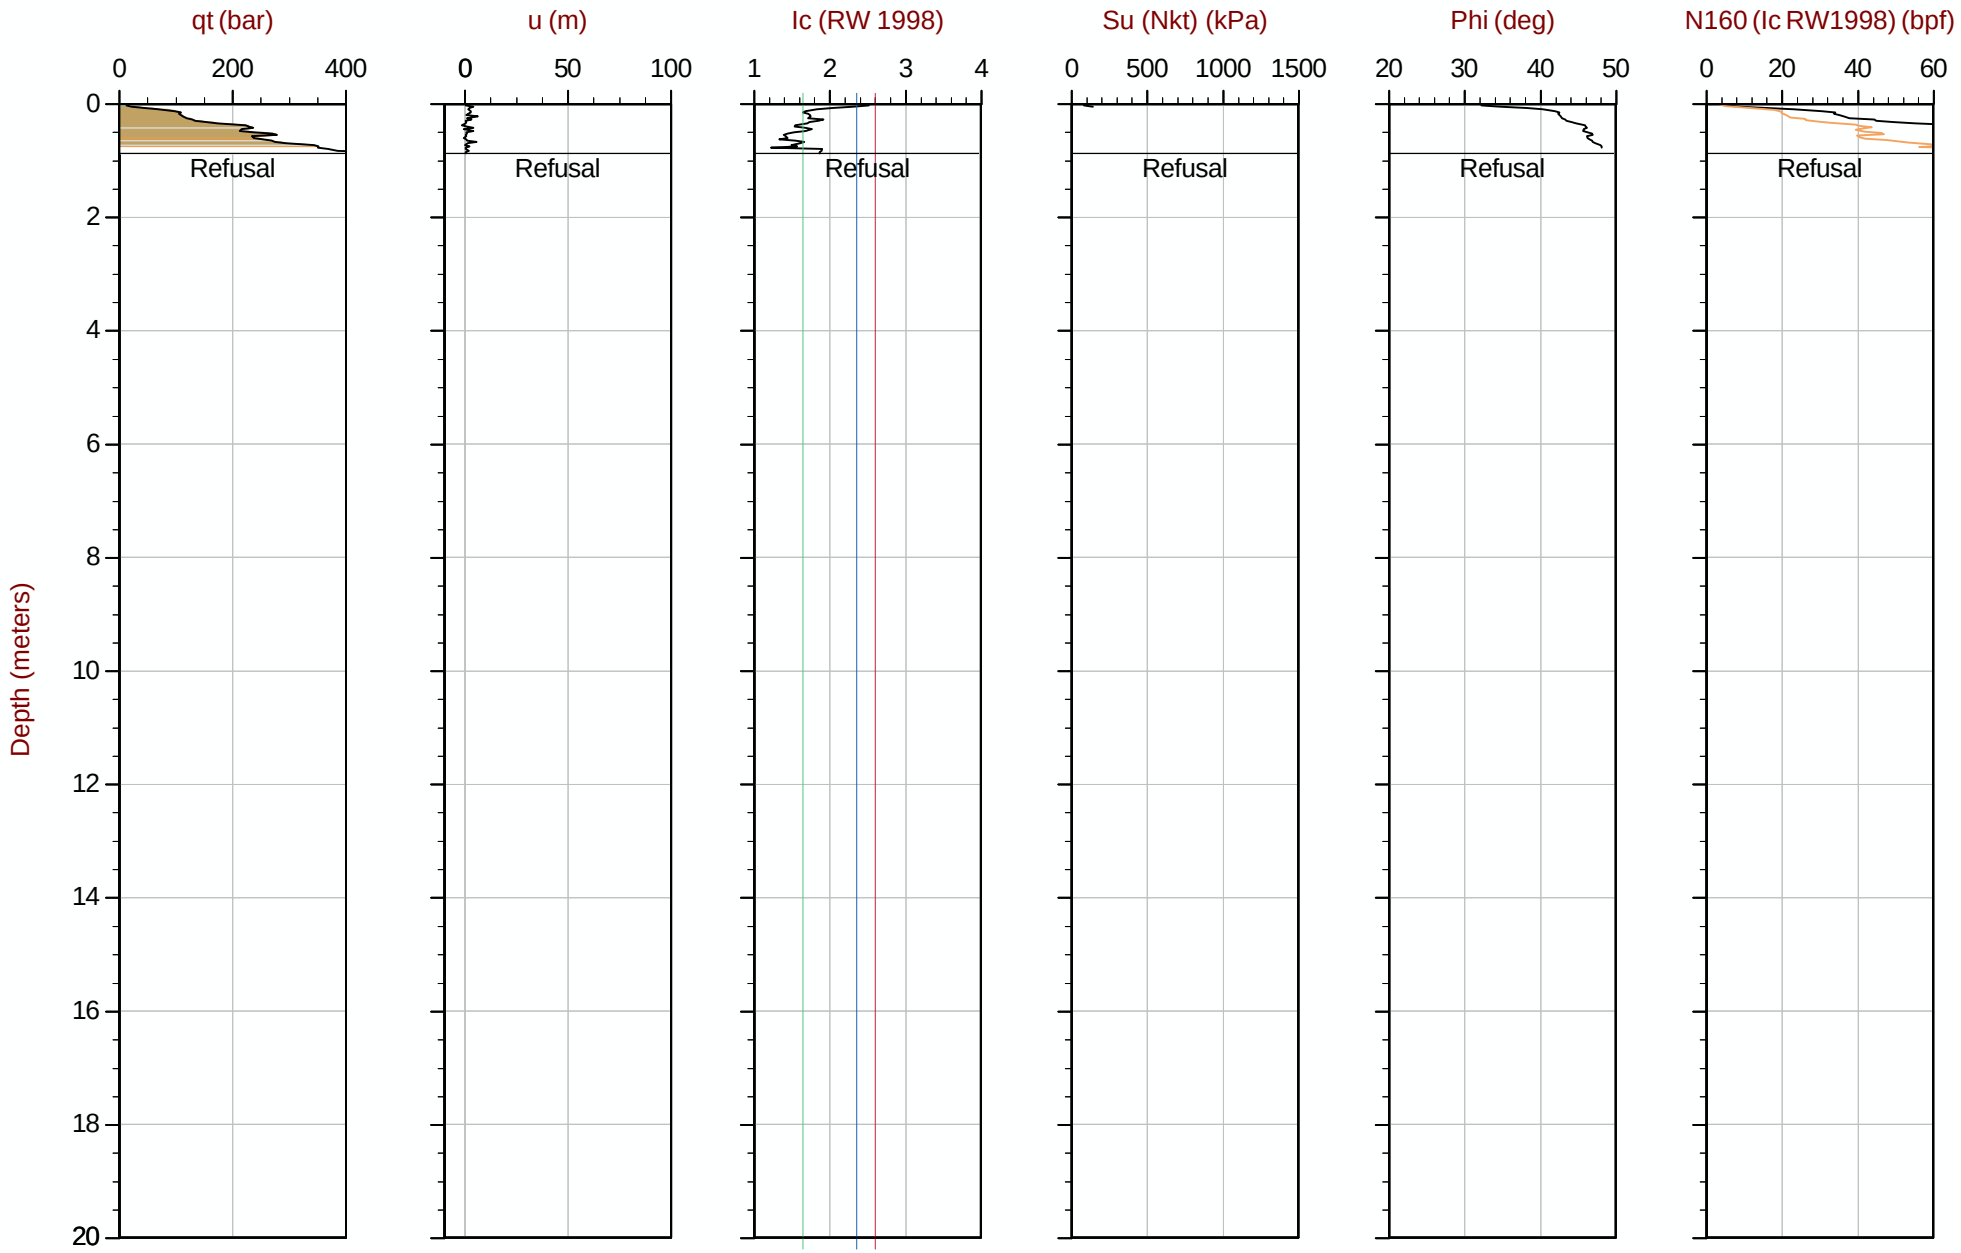

Max Depth: 0.875 m / 2.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT228.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611109m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 14:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228B
Cone: 854:T1500F15U35 Area= 15cm2

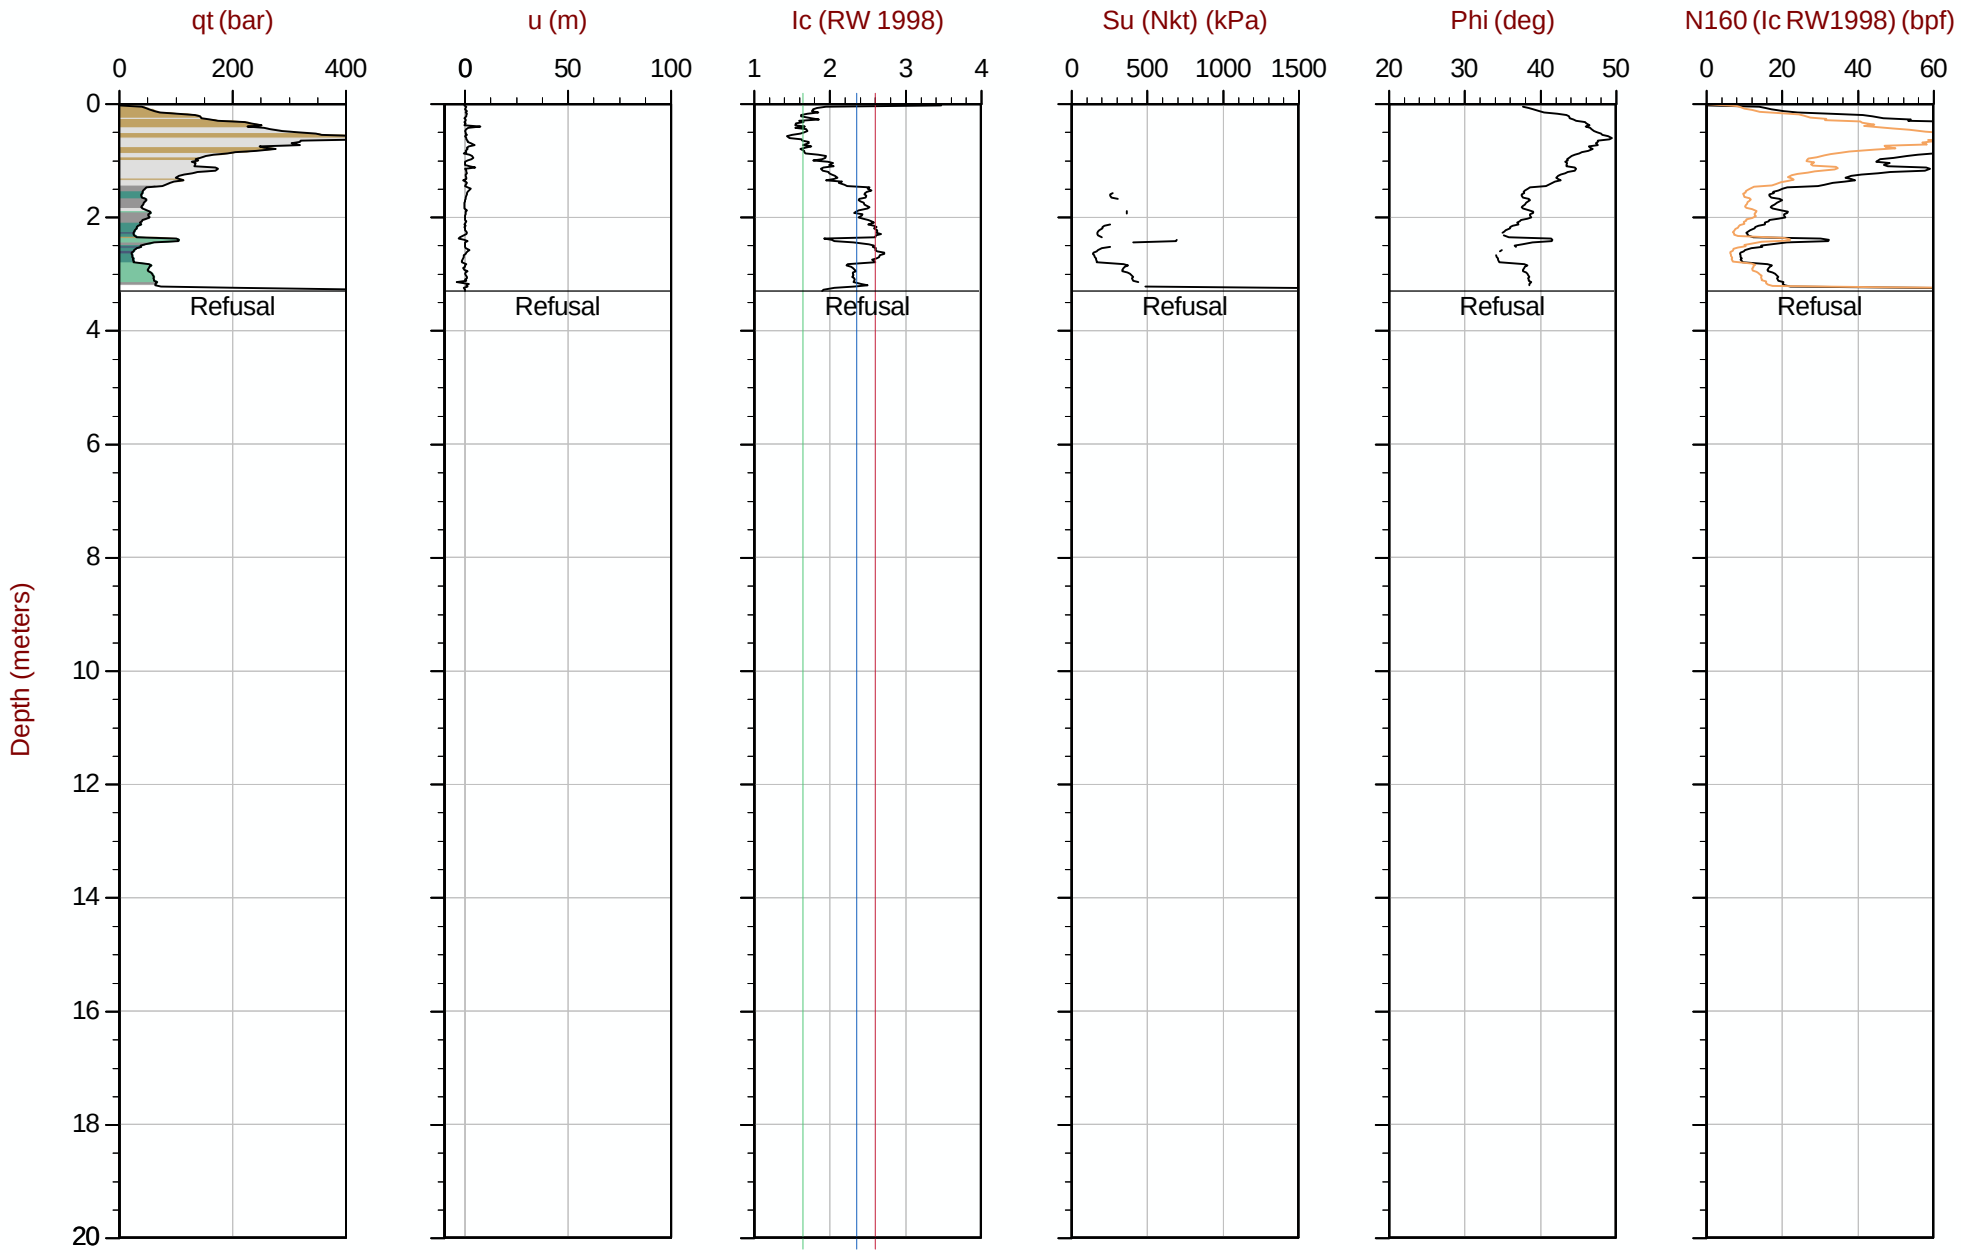

Max Depth: 3.300 m / 10.83 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT228B.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611107m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 14:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228C
Cone: 854:T1500F15U35 Area= 15cm2

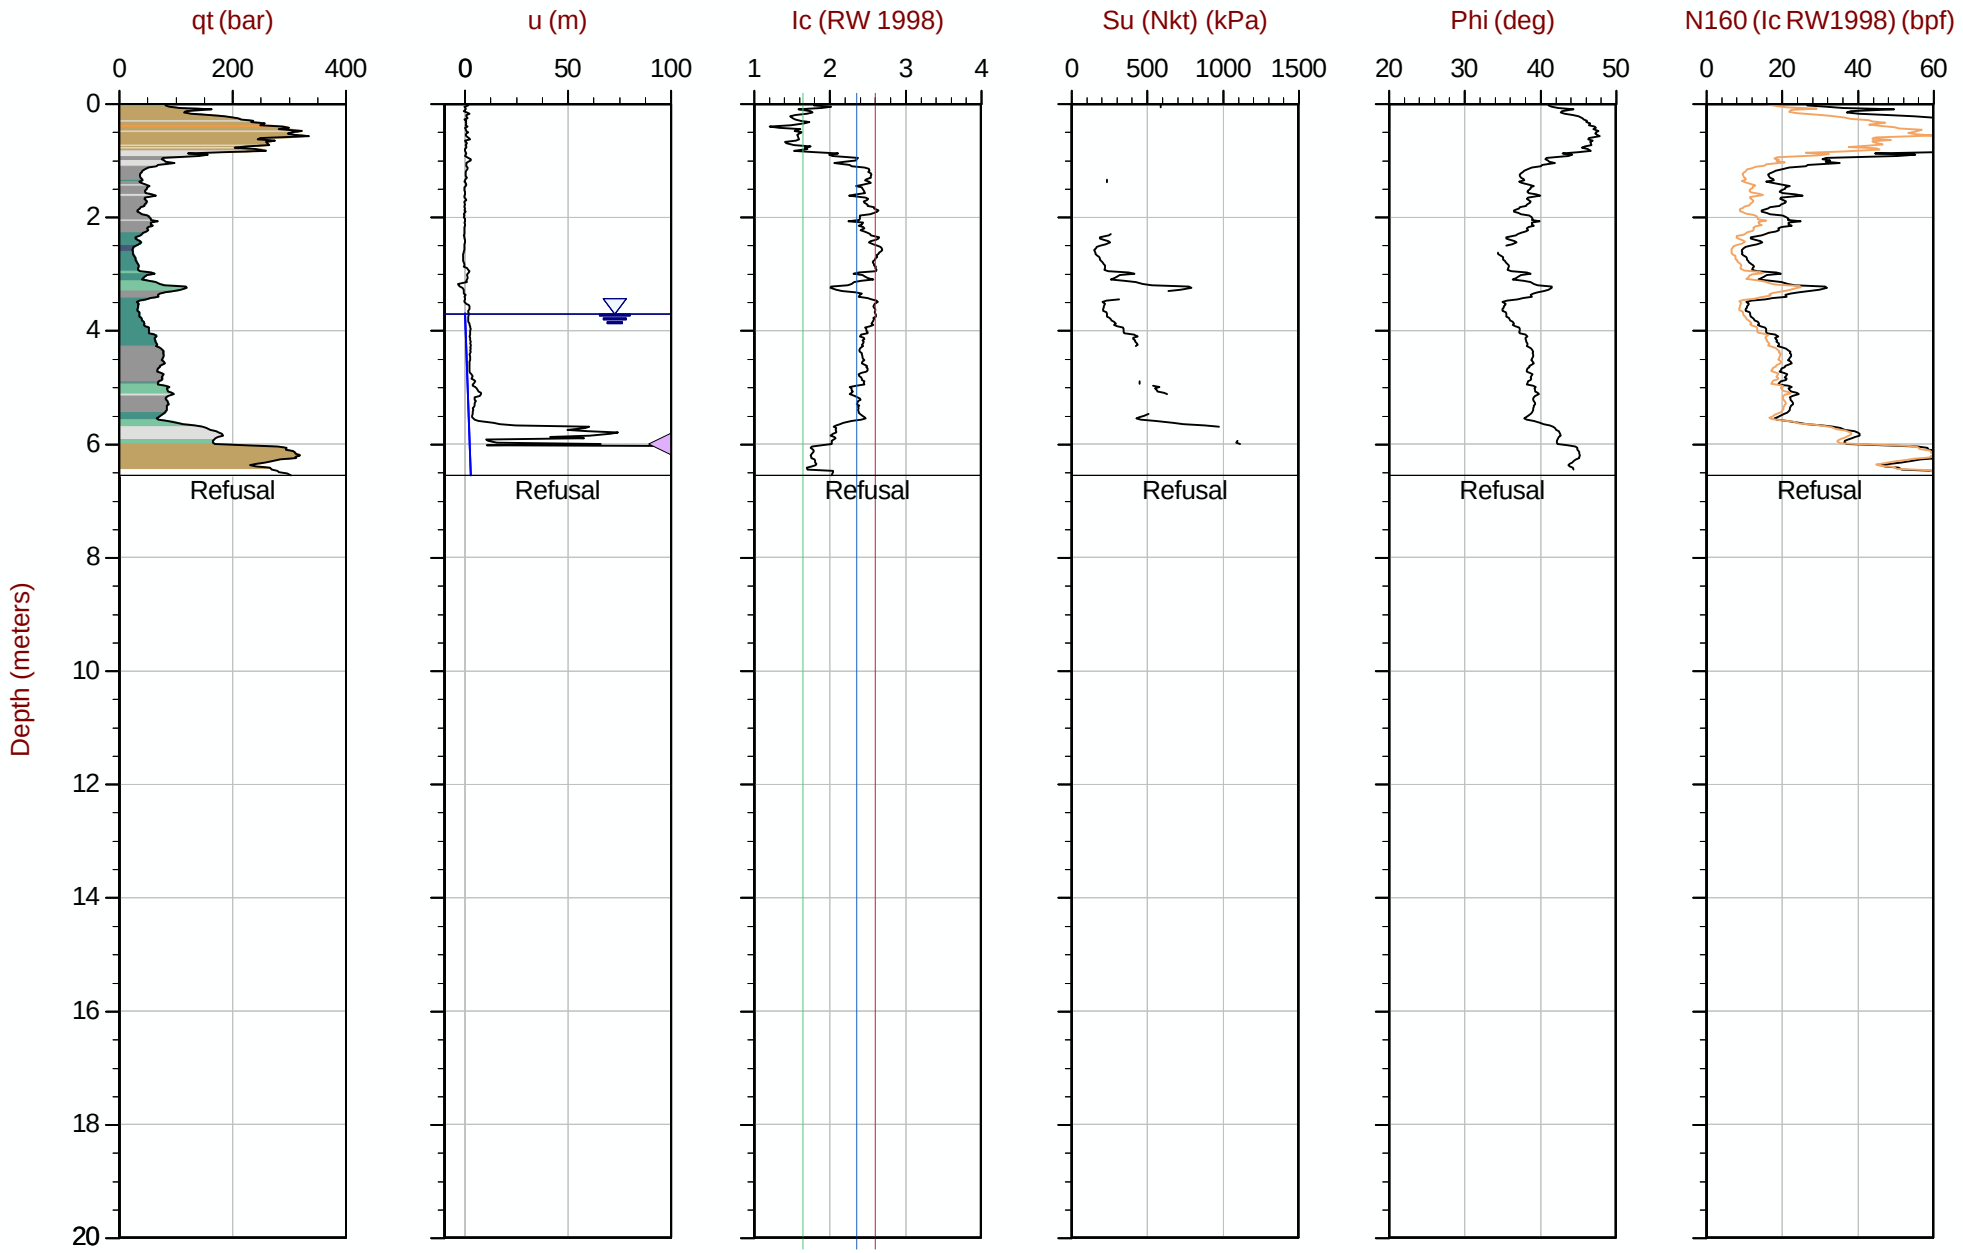

Max Depth: 6.550 m / 21.49 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT228C.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611105m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 15:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT229
Cone: 854:T1500F15U35 Area= 15cm2

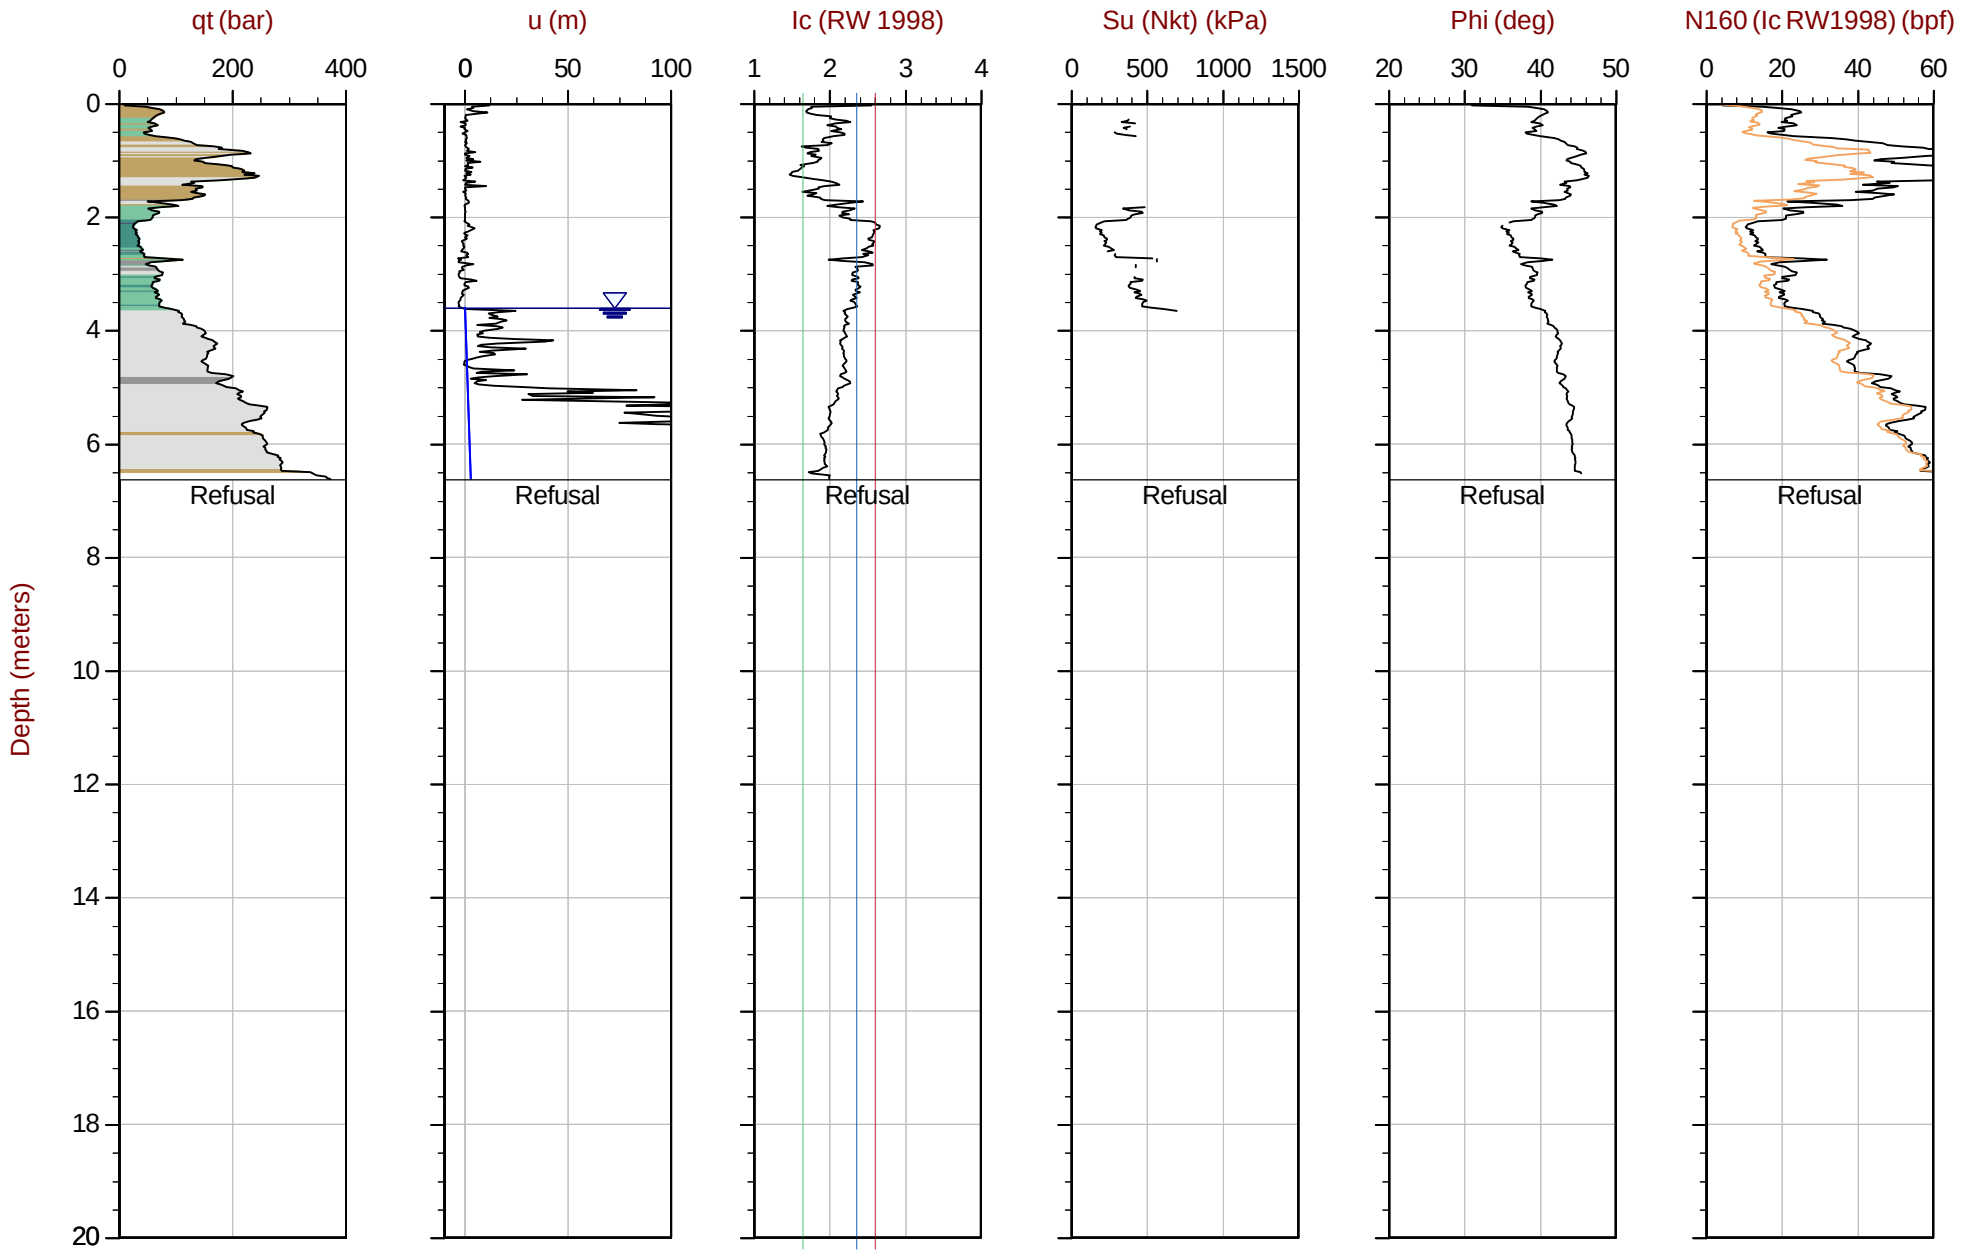

Max Depth: 6.625 m / 21.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT229.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611058m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 16:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT230
Cone: 854:T1500F15U35 Area= 15cm2

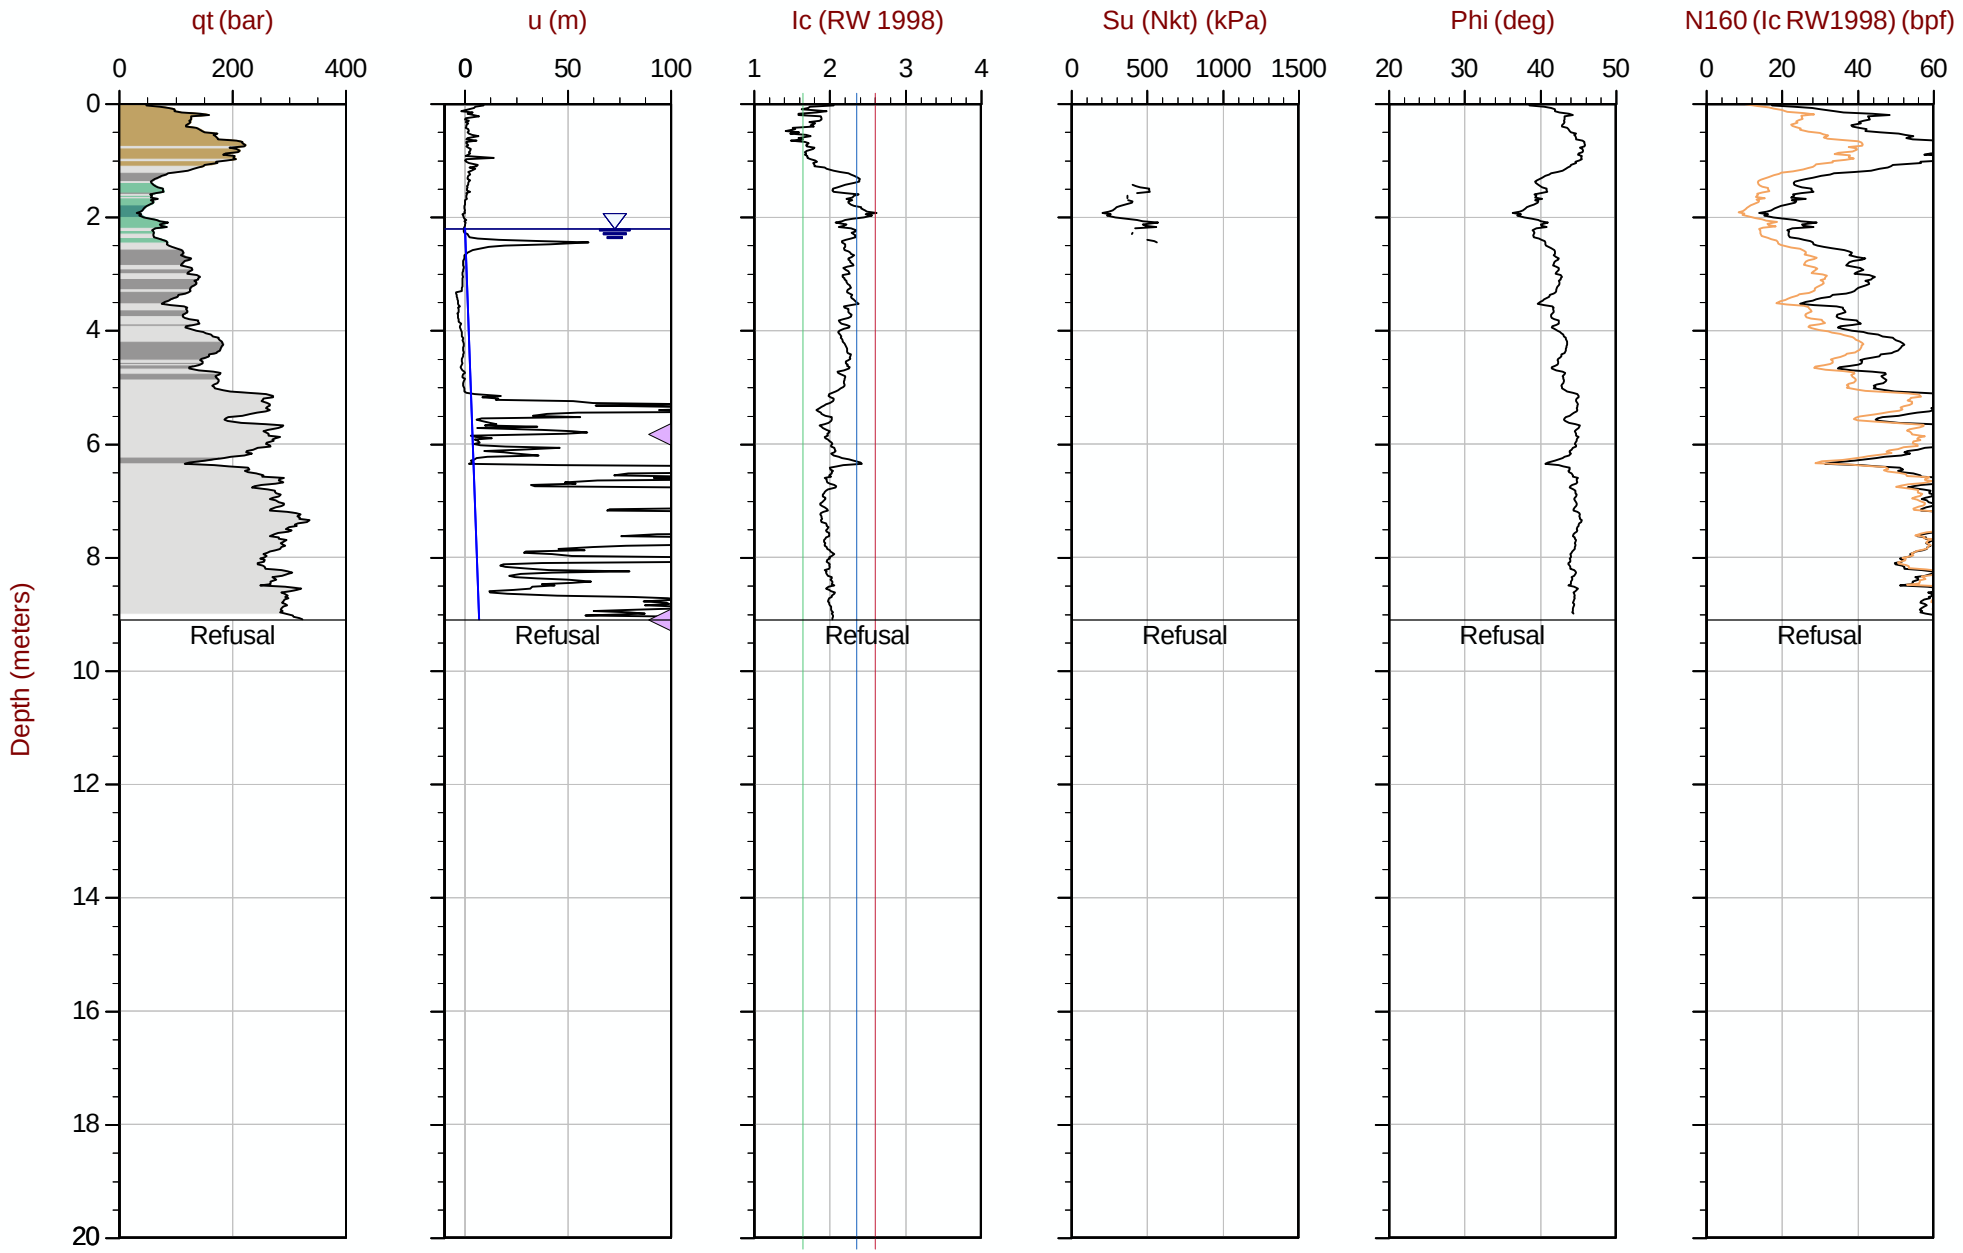

Max Depth: 9.100 m / 29.86 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT230.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611008m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 09:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT231
Cone: 854:T1500F15U35 Area= 15cm2

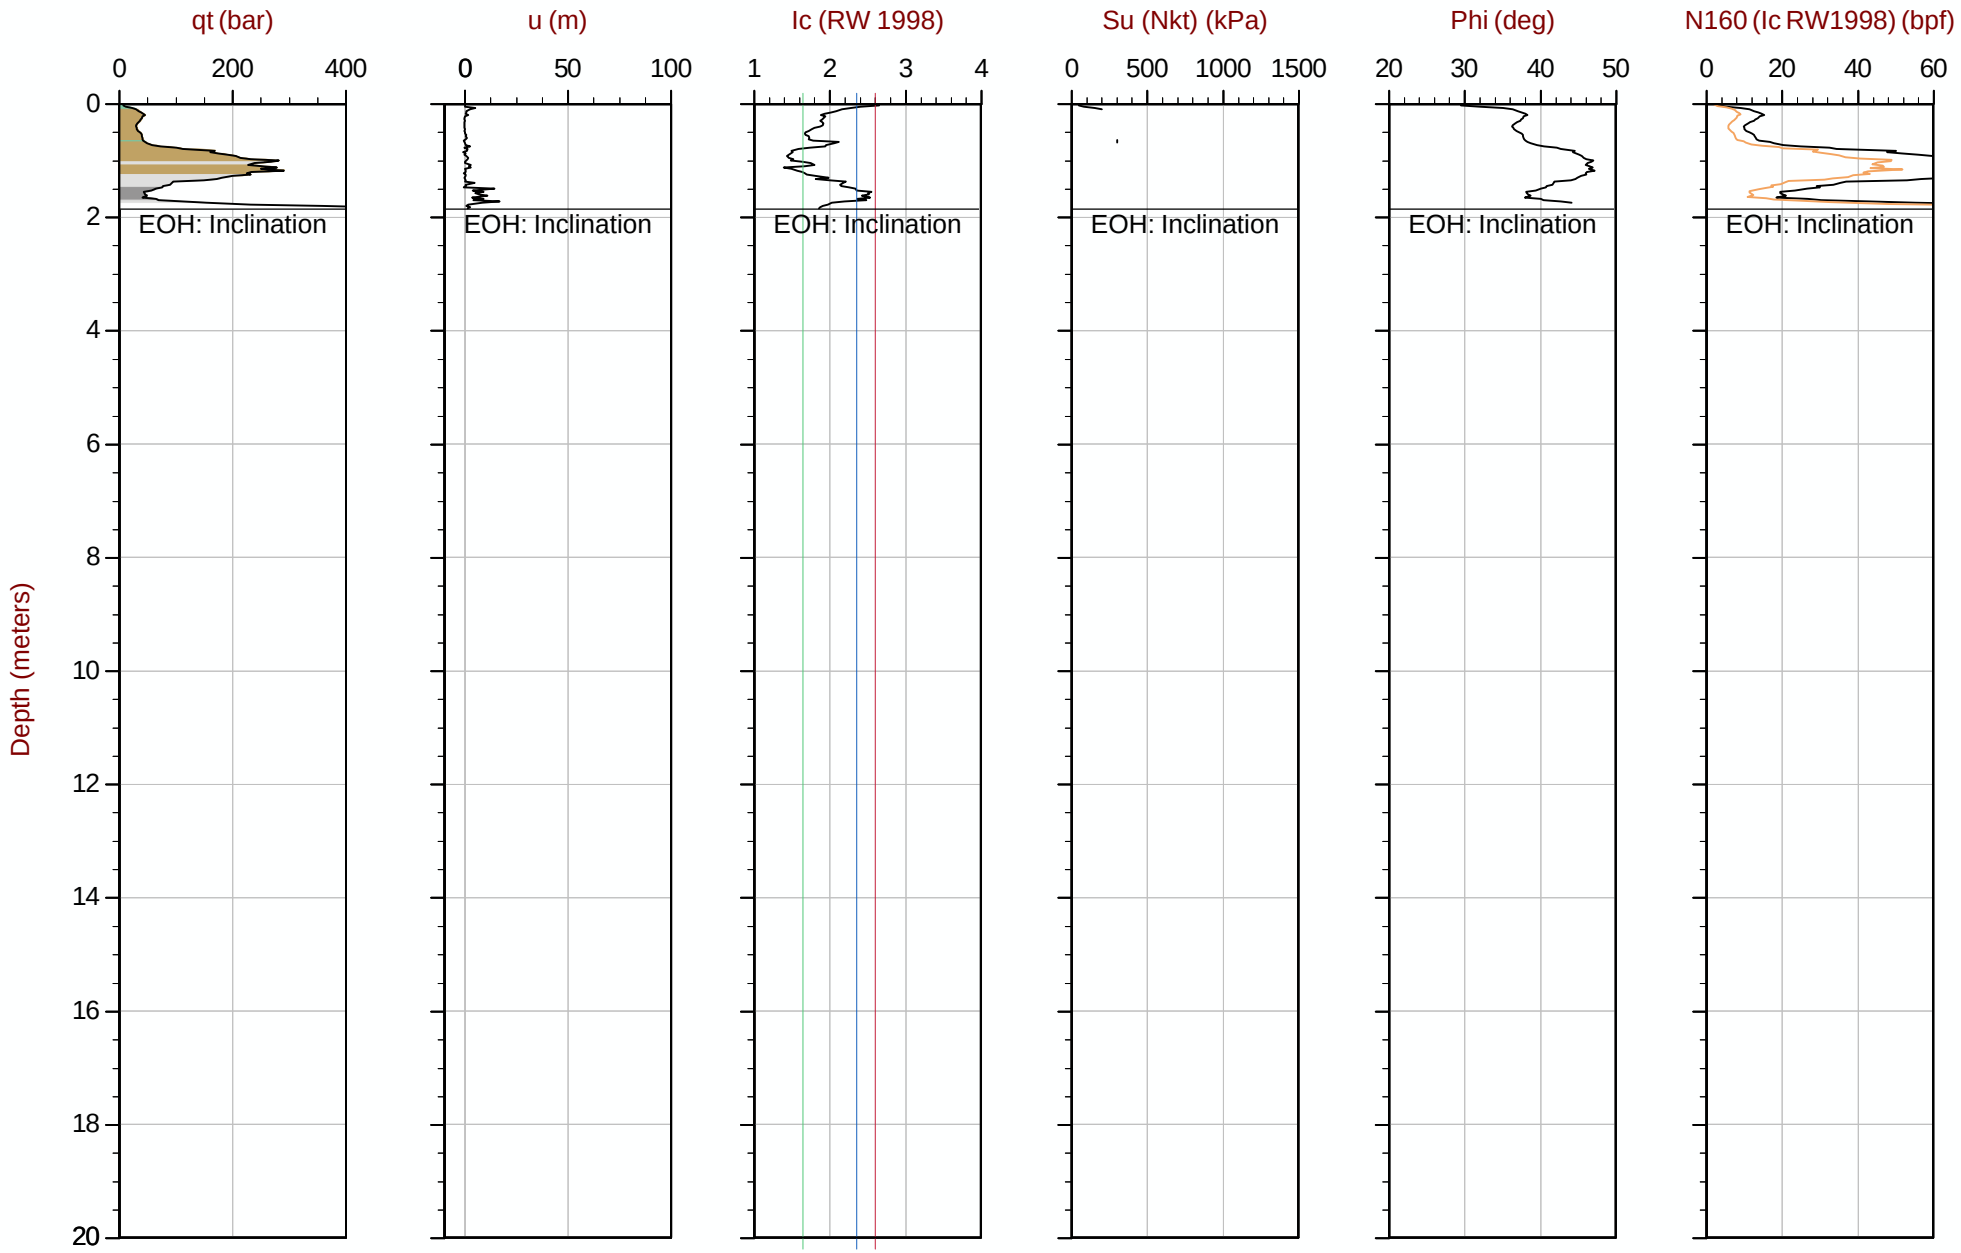

Max Depth: 1.850 m / 6.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT231.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610958m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 09:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT231A
Cone: 854:T1500F15U35 Area= 15cm2

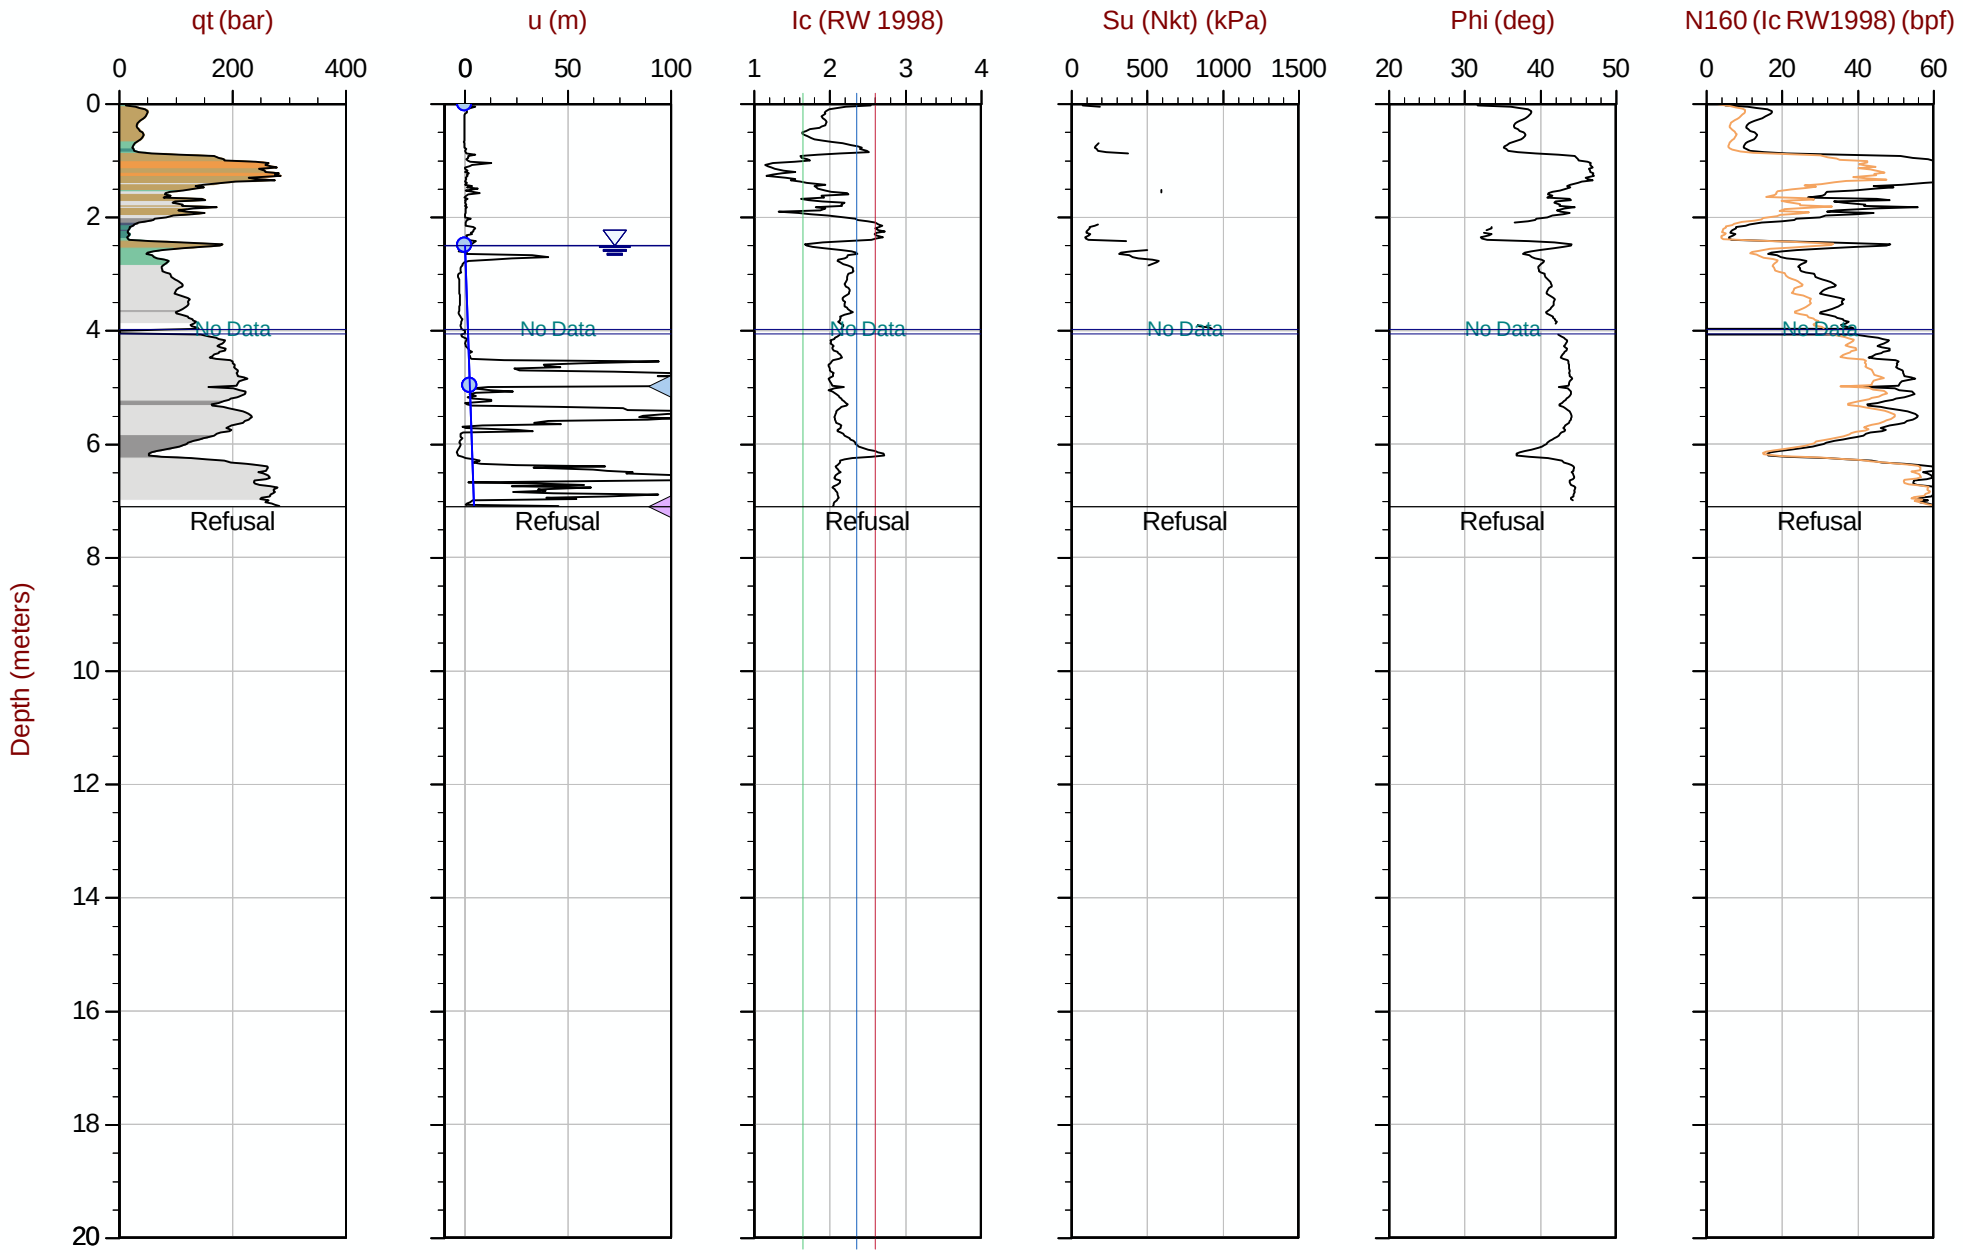

Max Depth: 7.100 m / 23.29 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT231A.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610958m E: 416859m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 10:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT232
Cone: 854:T1500F15U35 Area= 15cm2

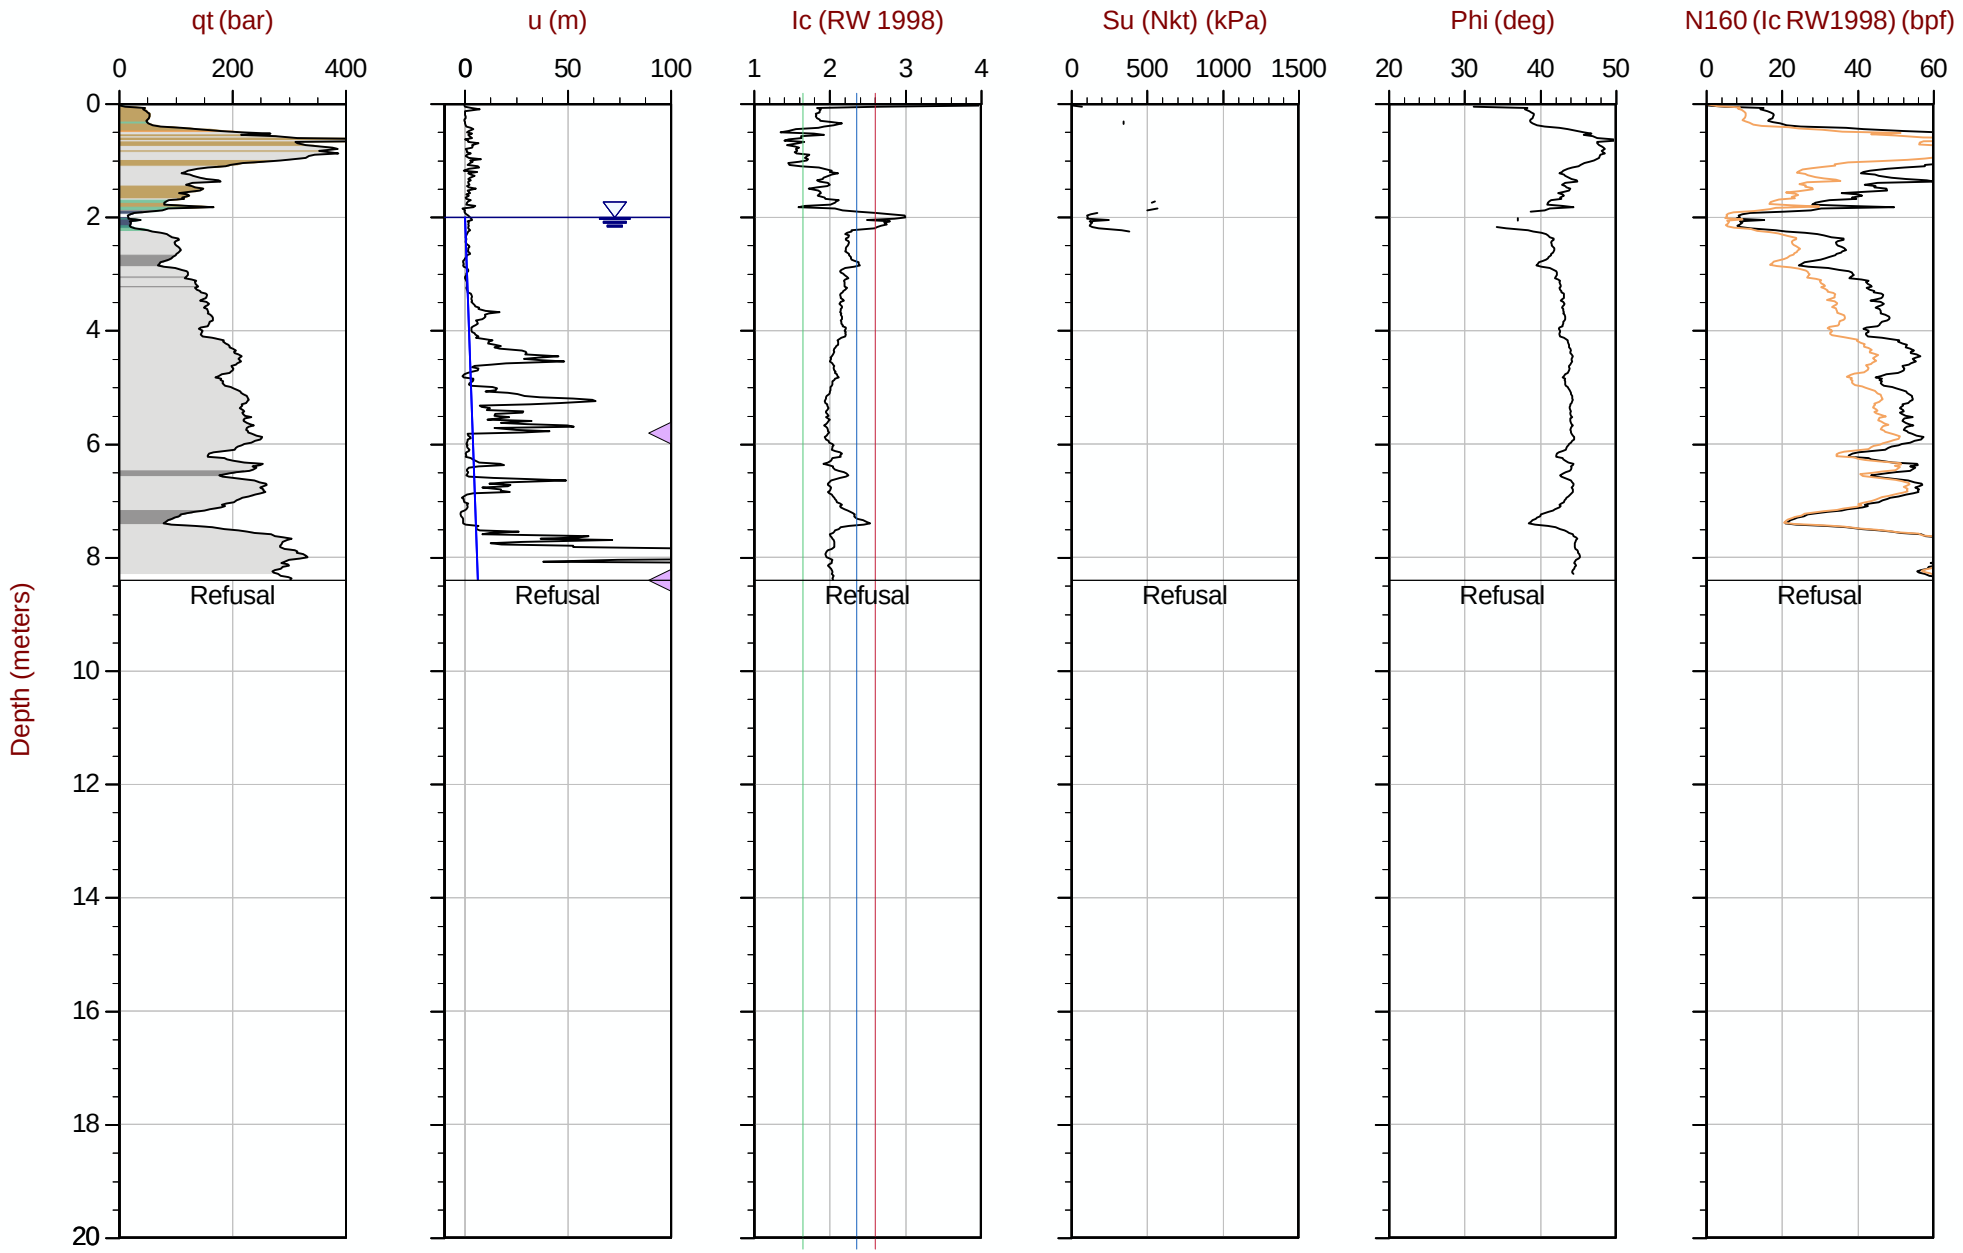

Max Depth: 8.400 m / 27.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT232.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610907m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 12:15
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT233
Cone: 854:T1500F15U35 Area= 15cm2

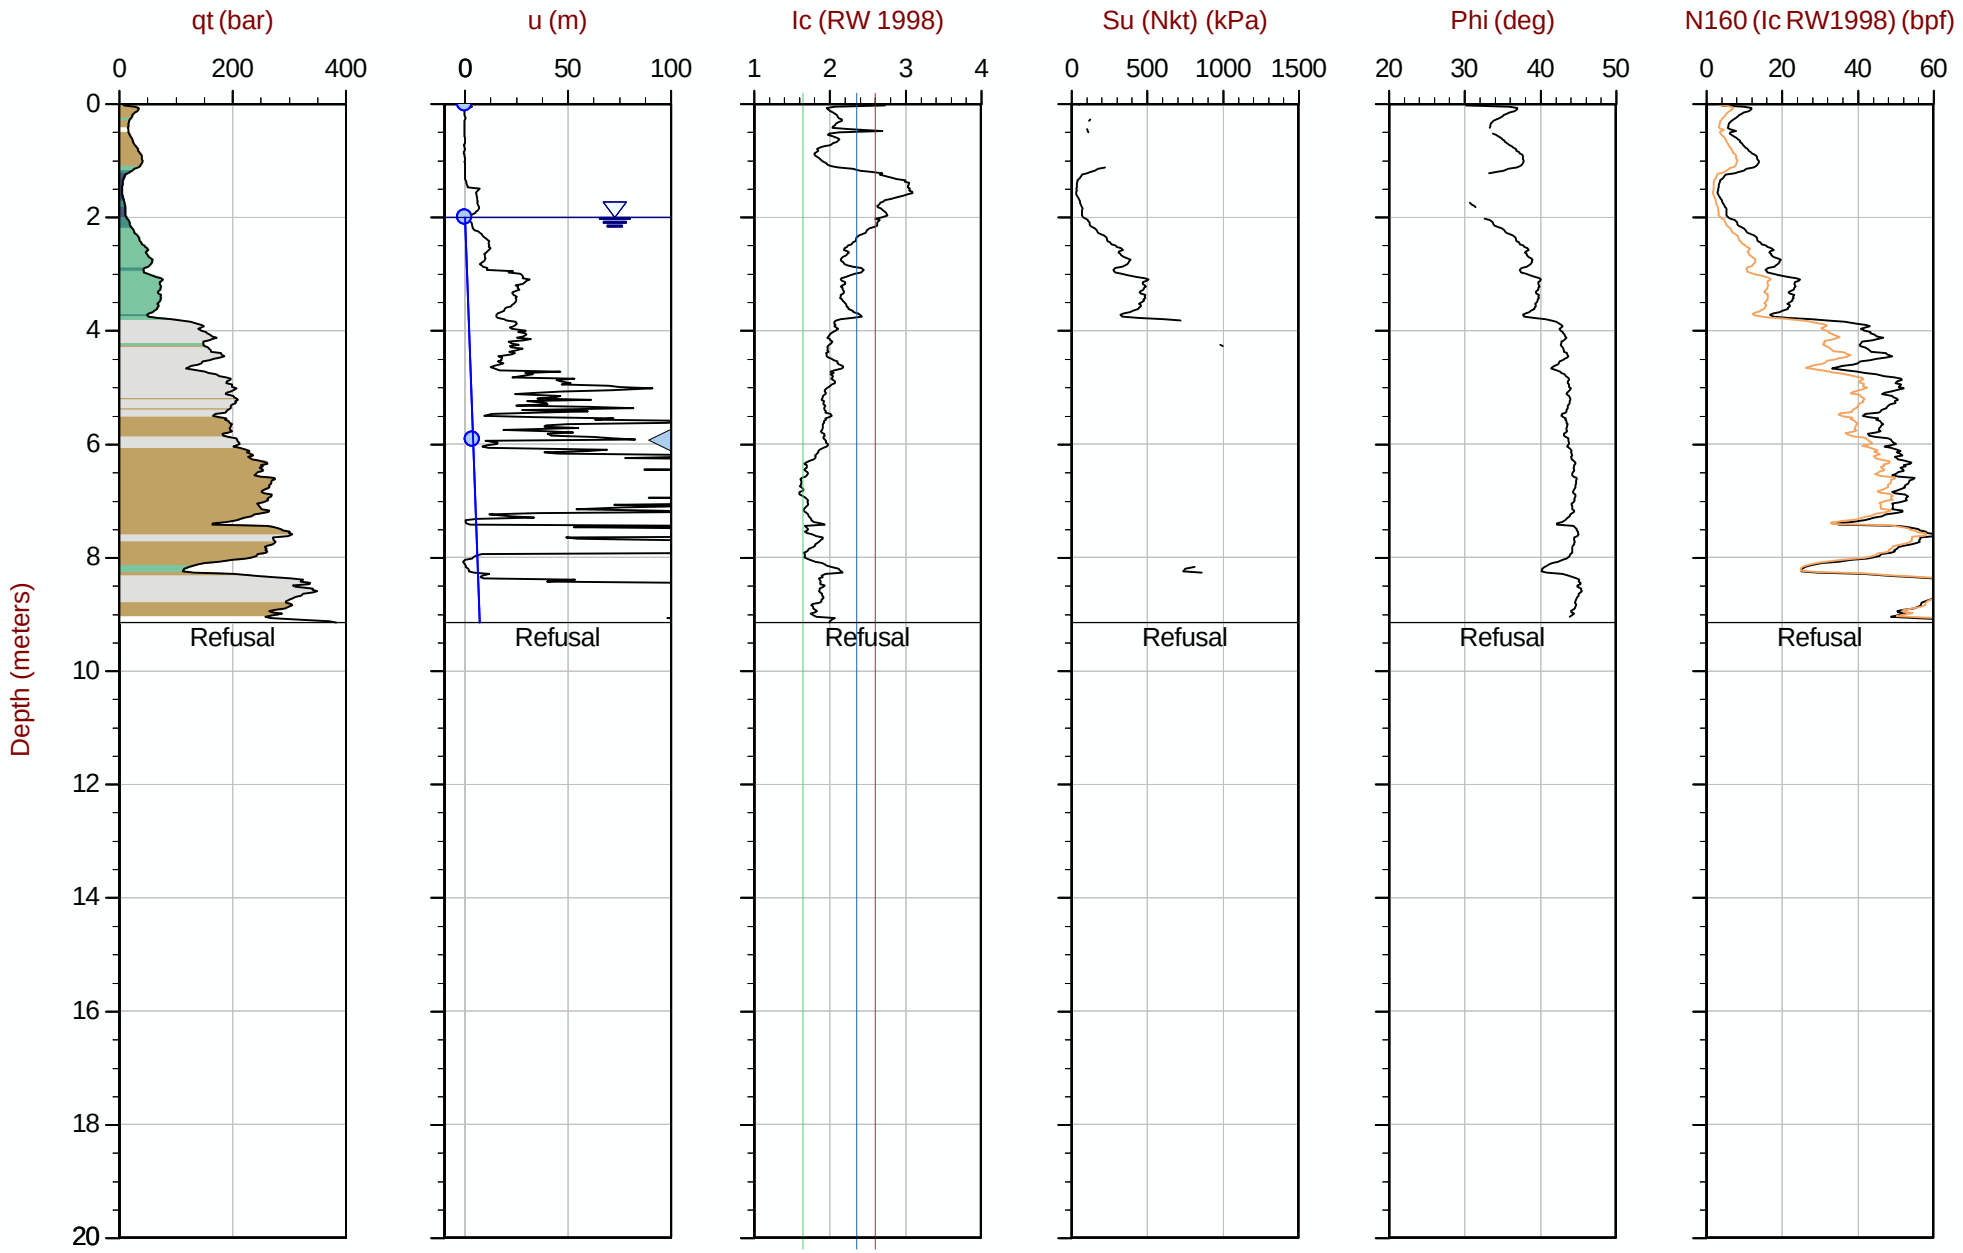

Max Depth: 9.150 m / 30.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT233.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610858m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 13:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT234
Cone: 854:T1500F15U35 Area= 15cm2

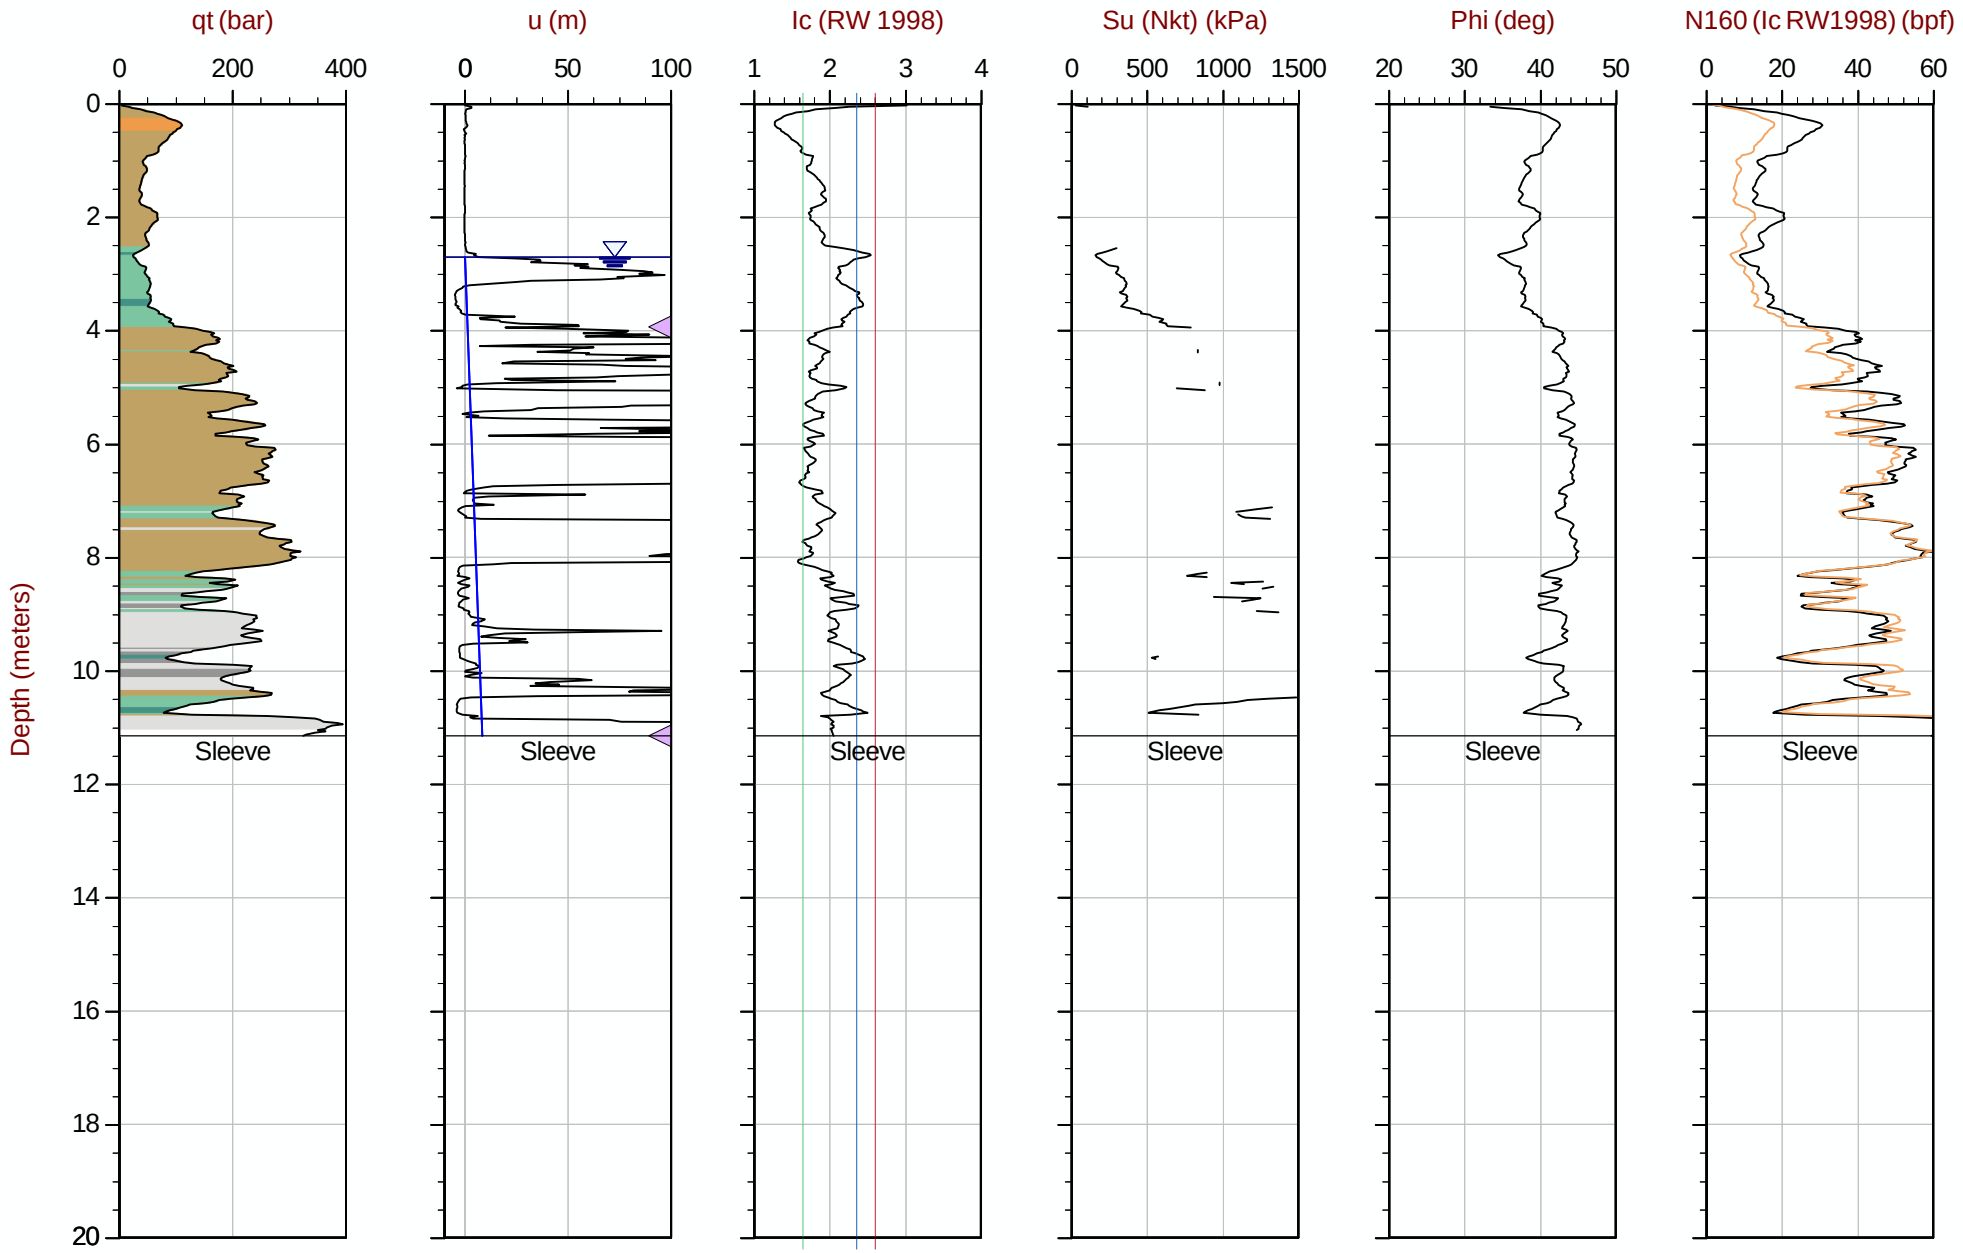

Max Depth: 11.150 m / 36.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT234.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610802m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 14:42
Site: Brooks, Alberta

Sounding: RCPT22-22CPT235
Cone: 854:T1500F15U35 Area= 15cm2

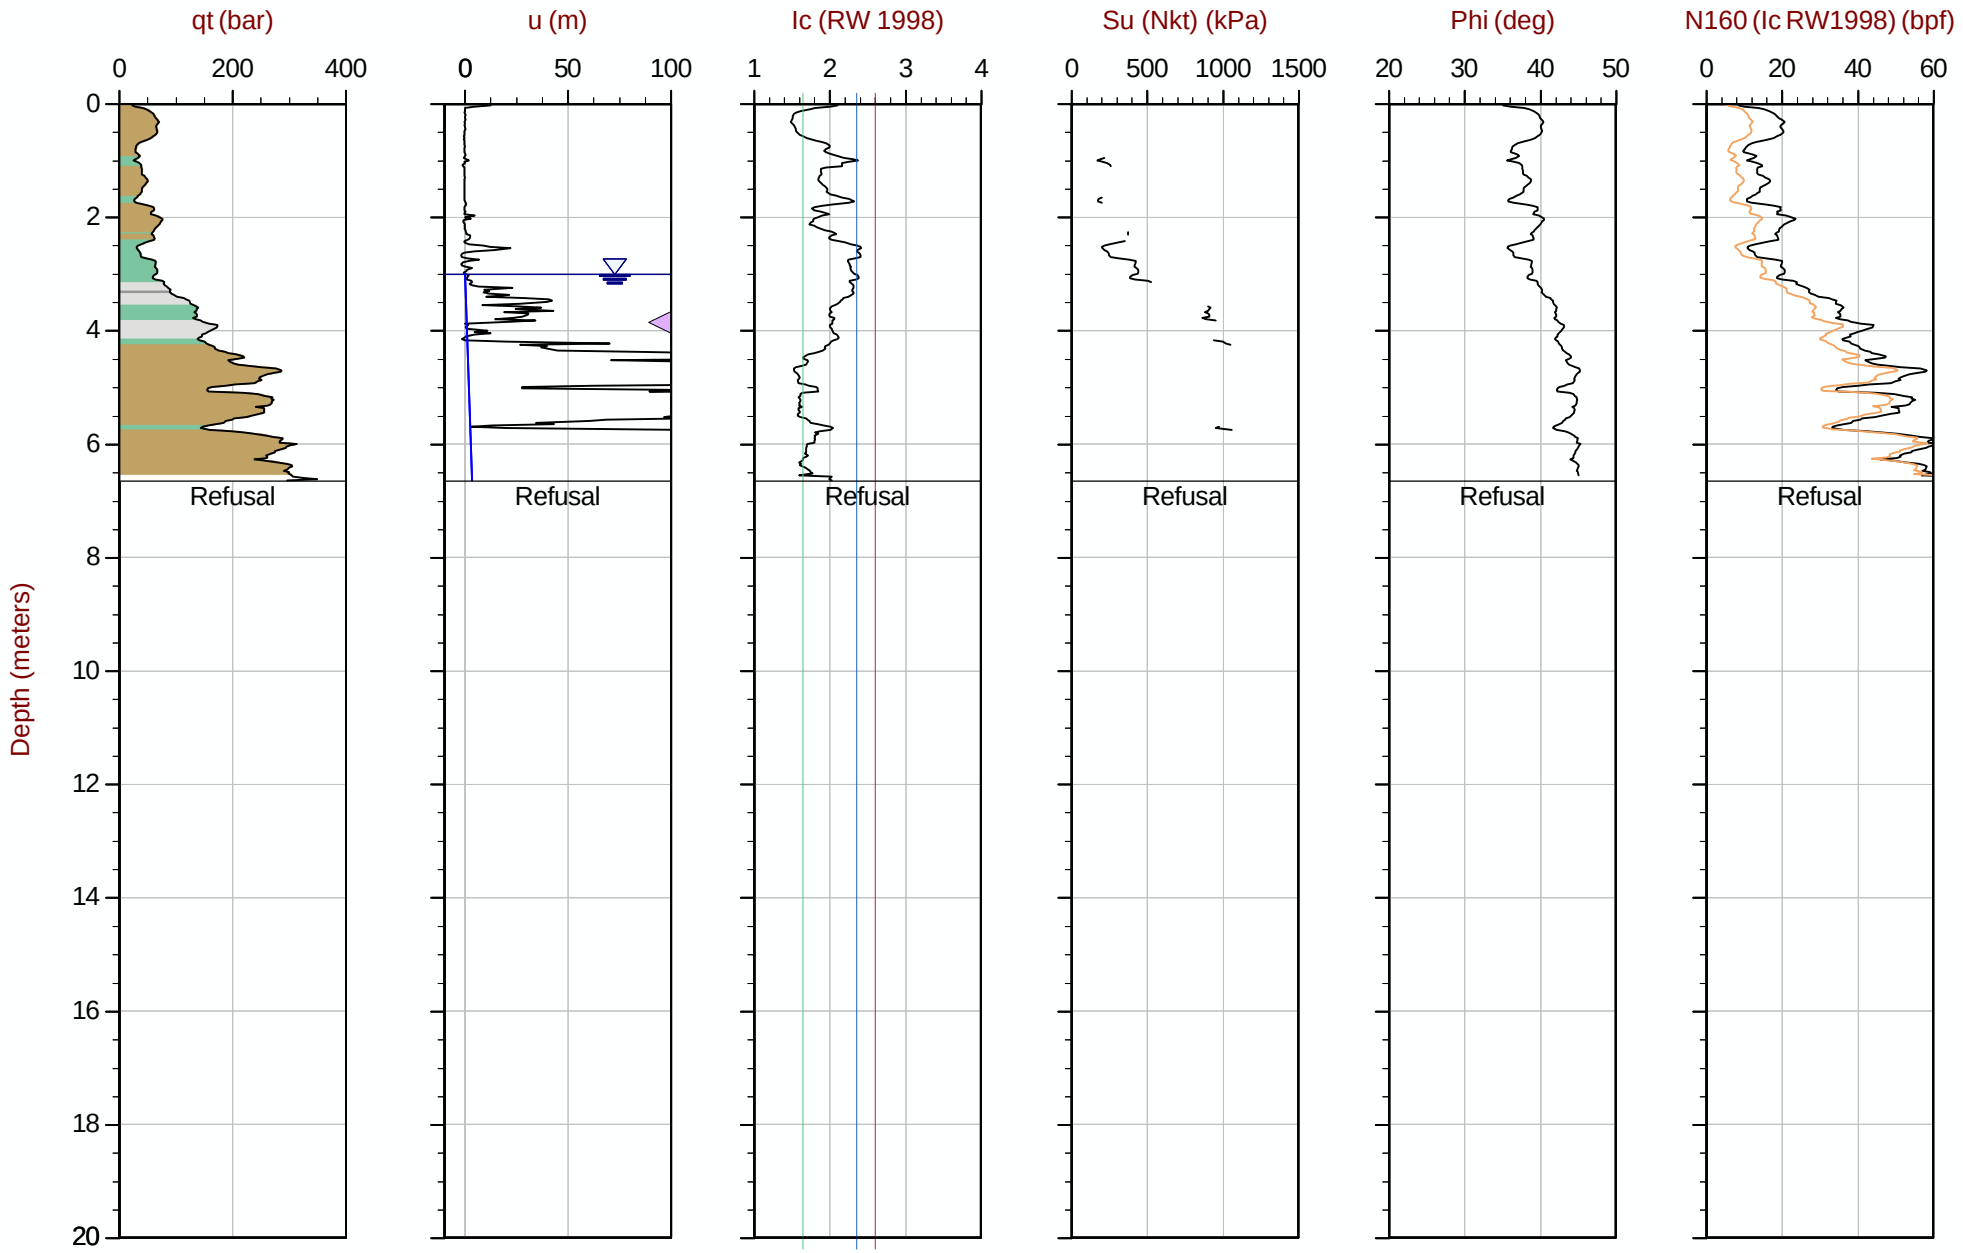

Max Depth: 6.650 m / 21.82 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT235.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610758m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 15:41
Site: Brooks, Alberta

Sounding: RCPT22-22CPT236
Cone: 854:T1500F15U35 Area= 15cm2

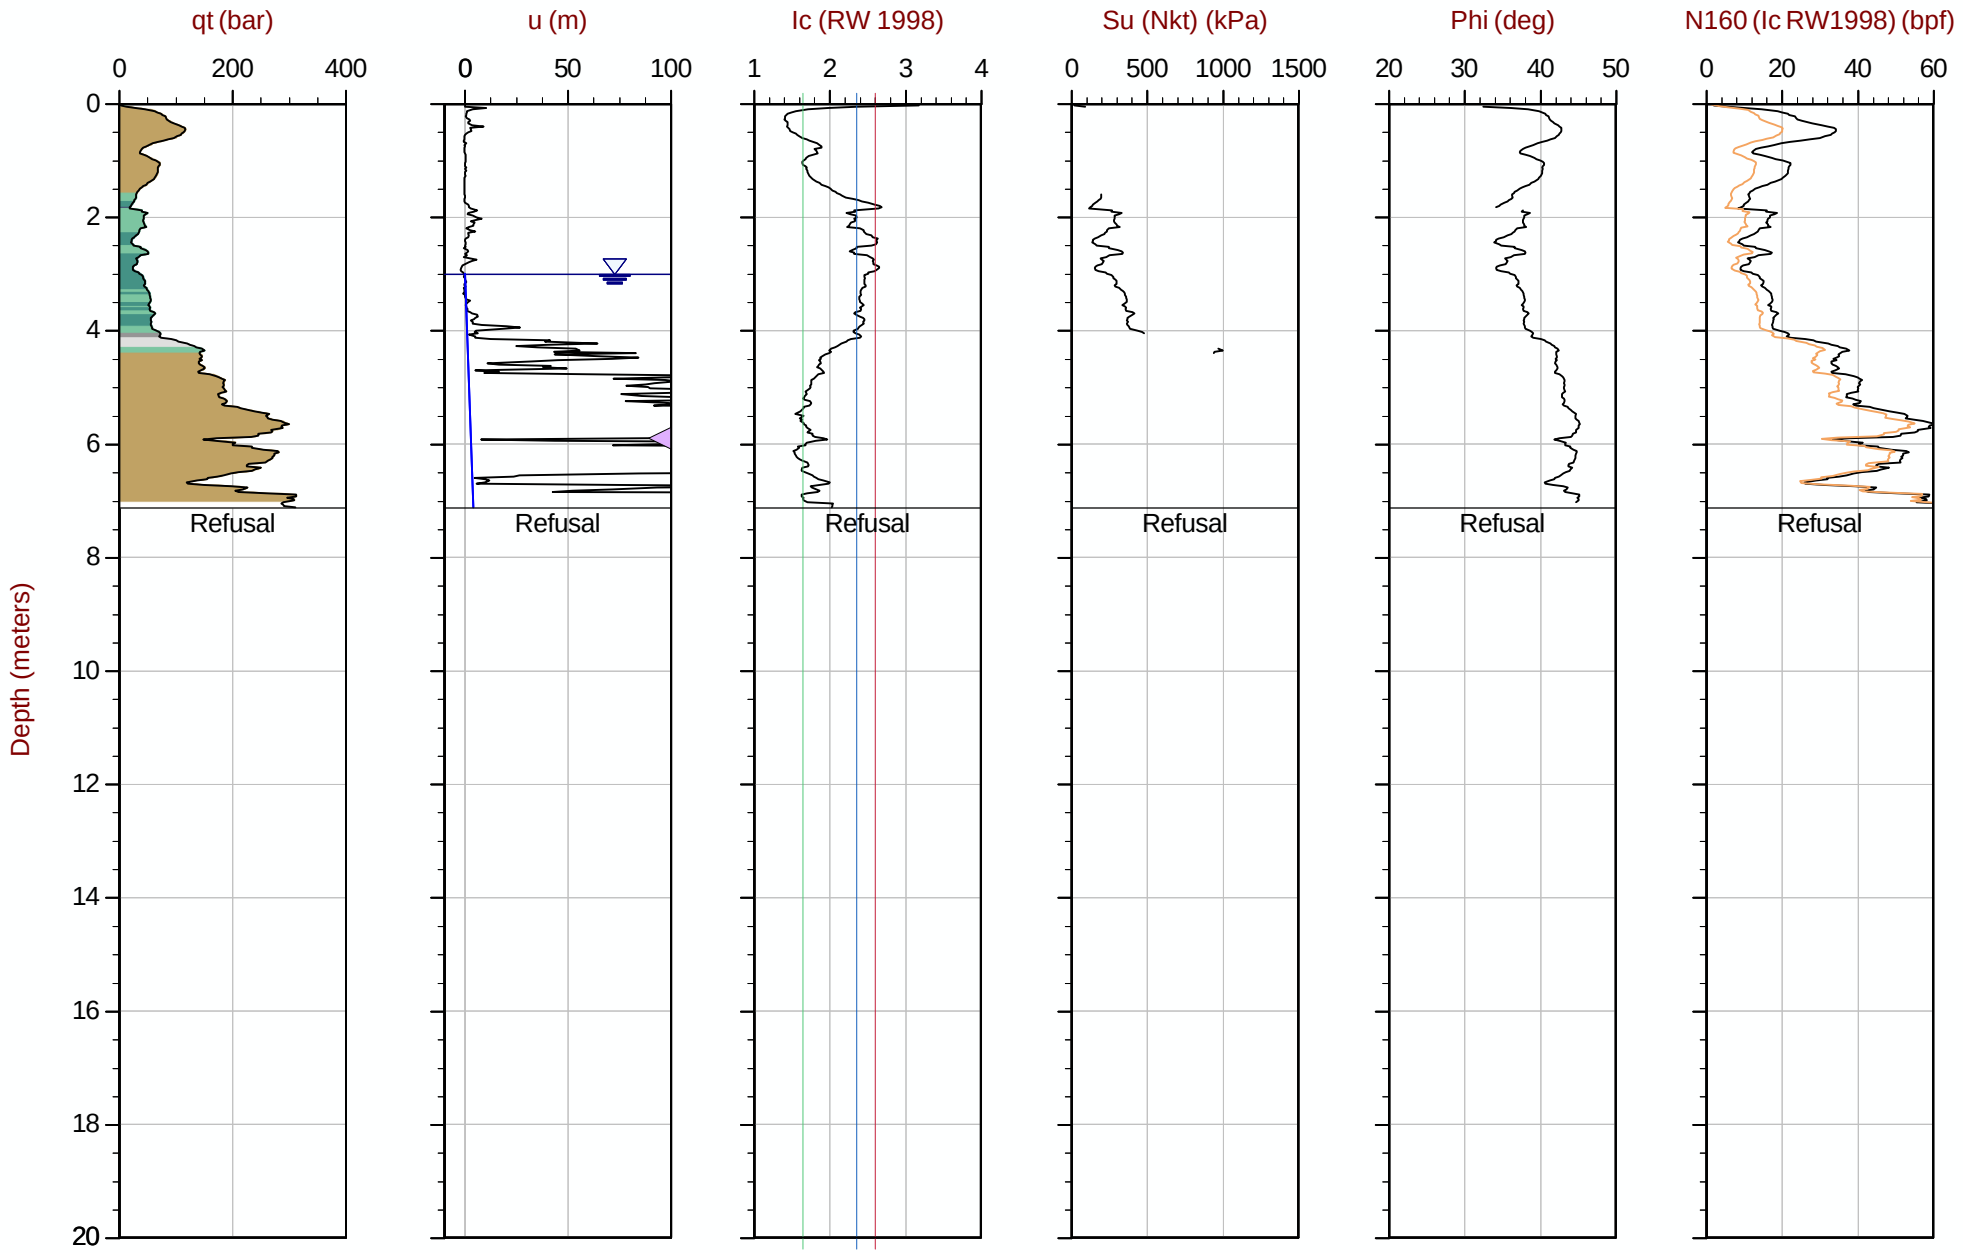

Max Depth: 7.125 m / 23.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT236.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610705m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 16:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT237
Cone: 854:T1500F15U35 Area= 15cm2

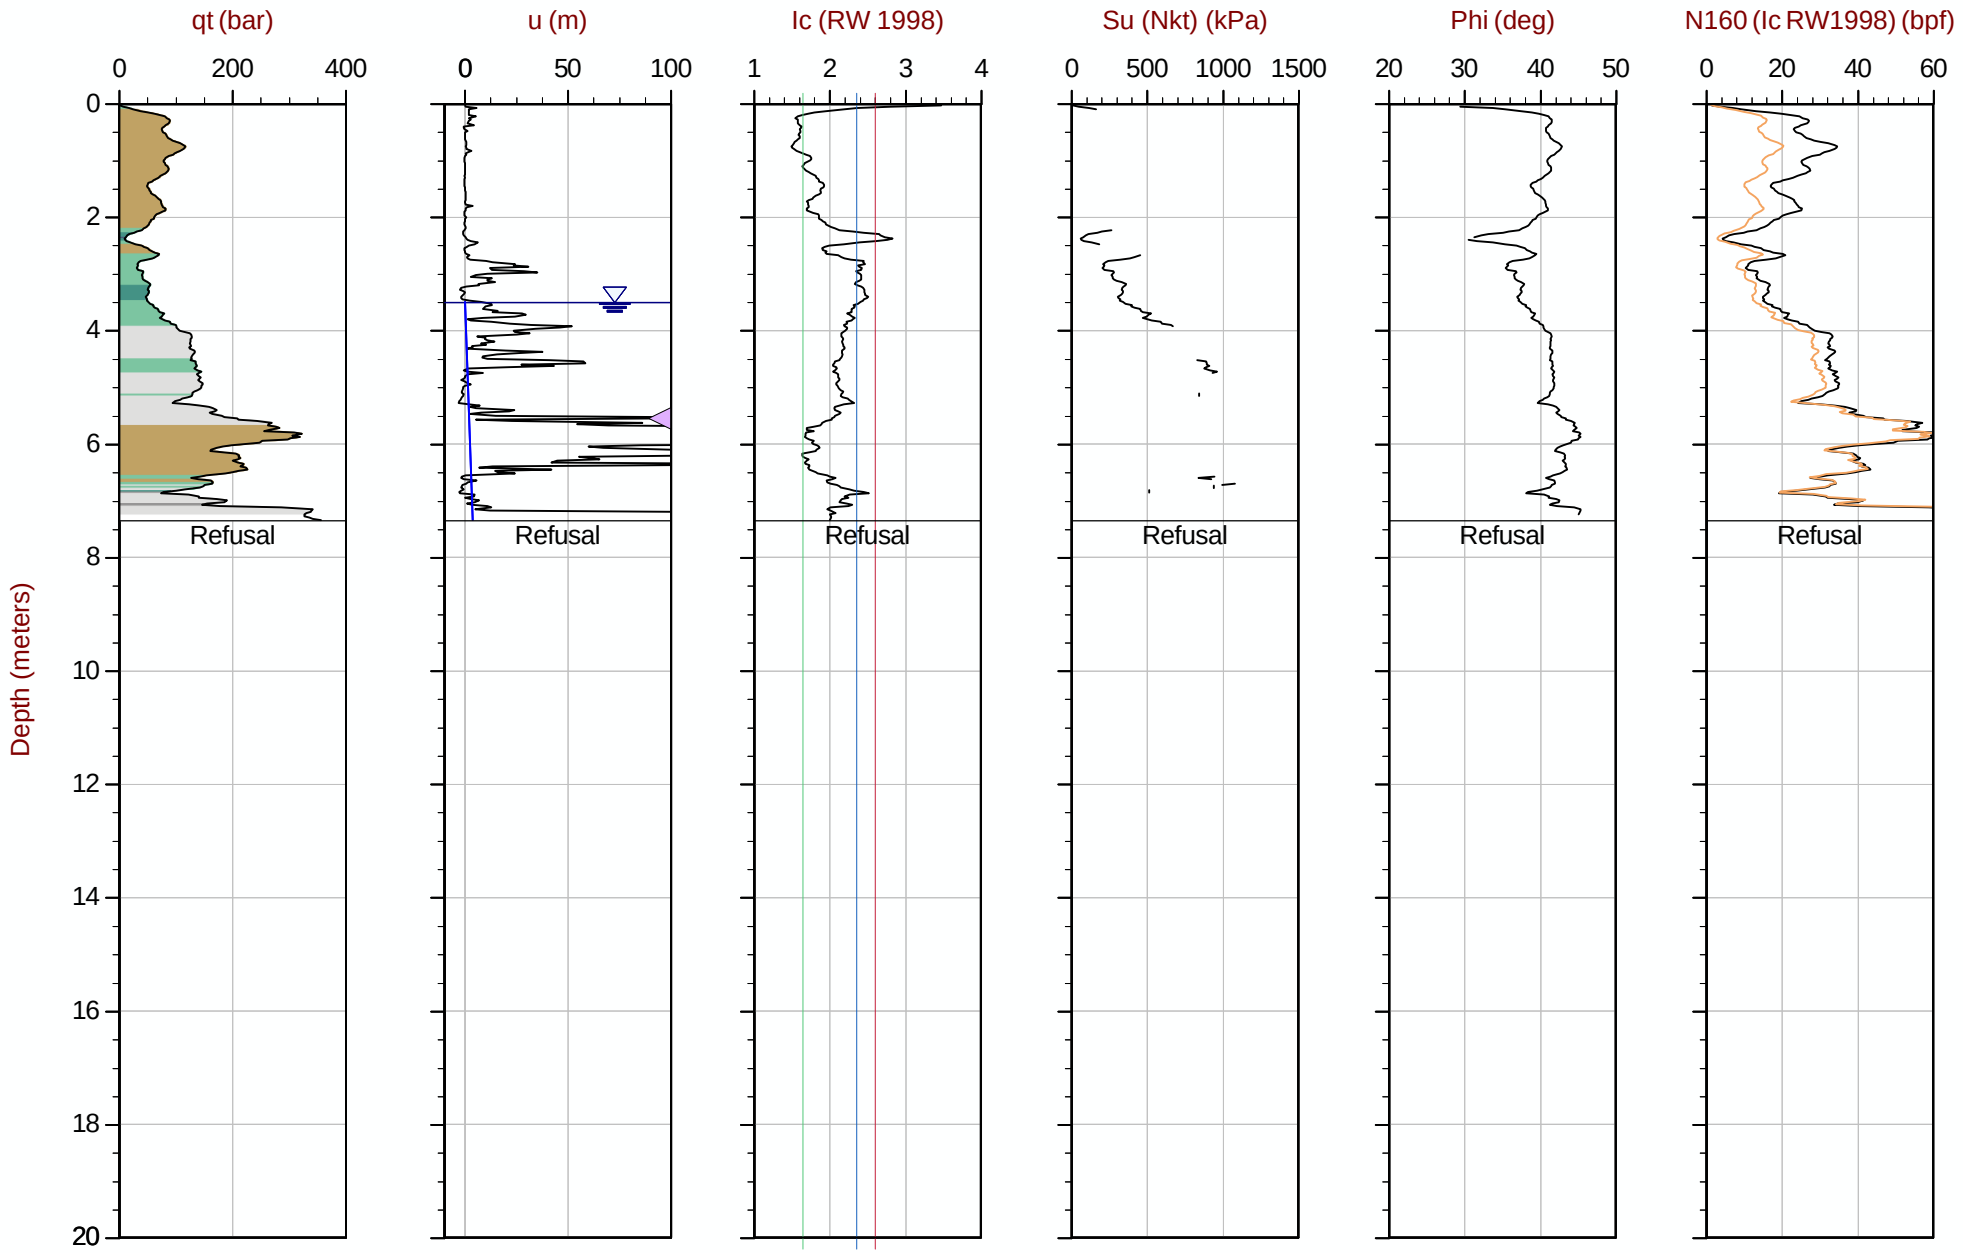

Max Depth: 7.350 m / 24.11 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT237.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610658m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 07:15
Site: Brooks, Alberta

Sounding: RCPT22-22CPT238
Cone: 854:T1500F15U35 Area= 15cm2

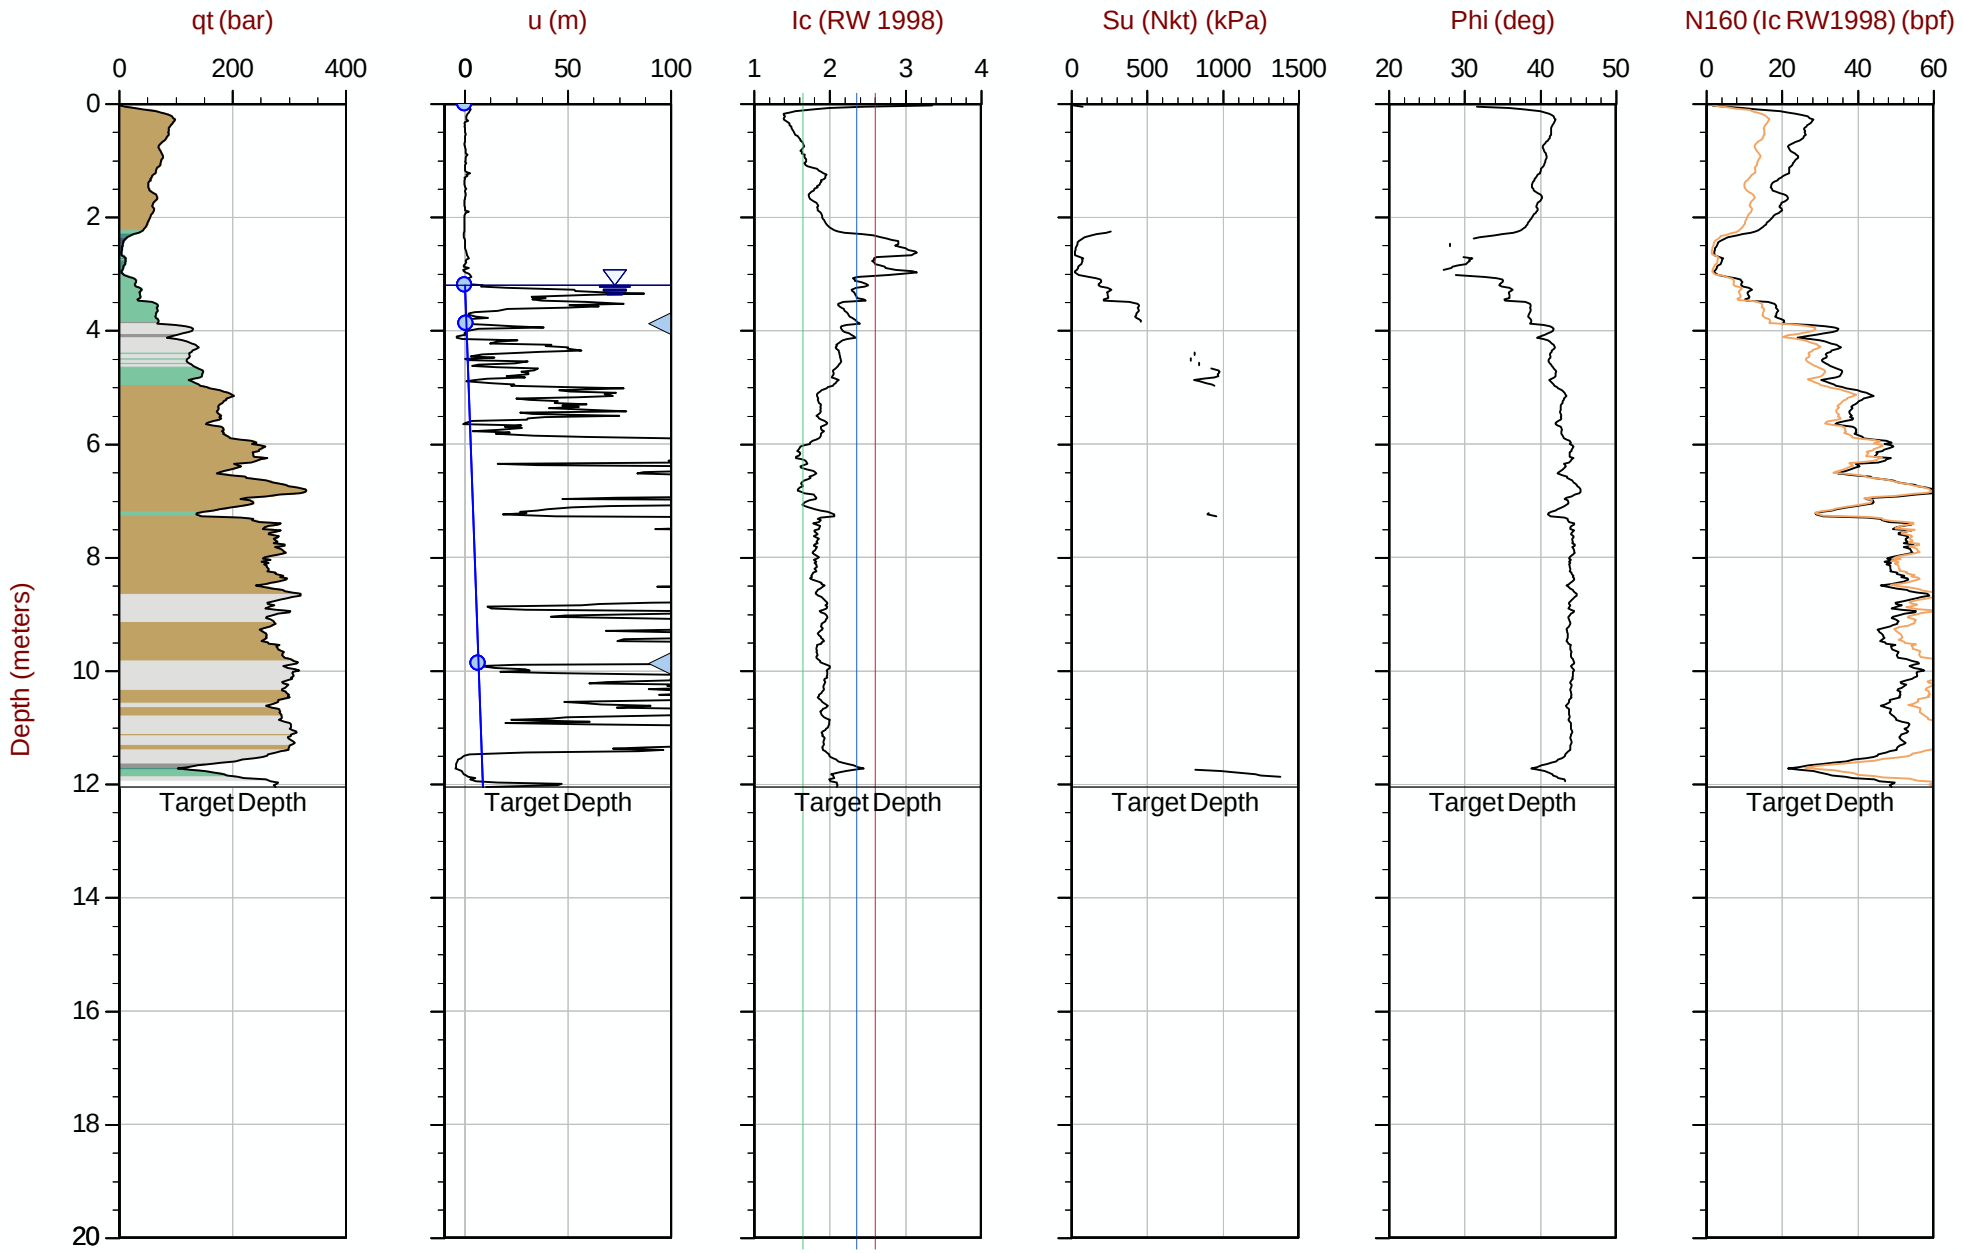

Max Depth: 12.050 m / 39.53 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT238.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610603m E: 416857m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 08:41
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT239
Cone: 854:T1500F15U35 Area= 15cm2

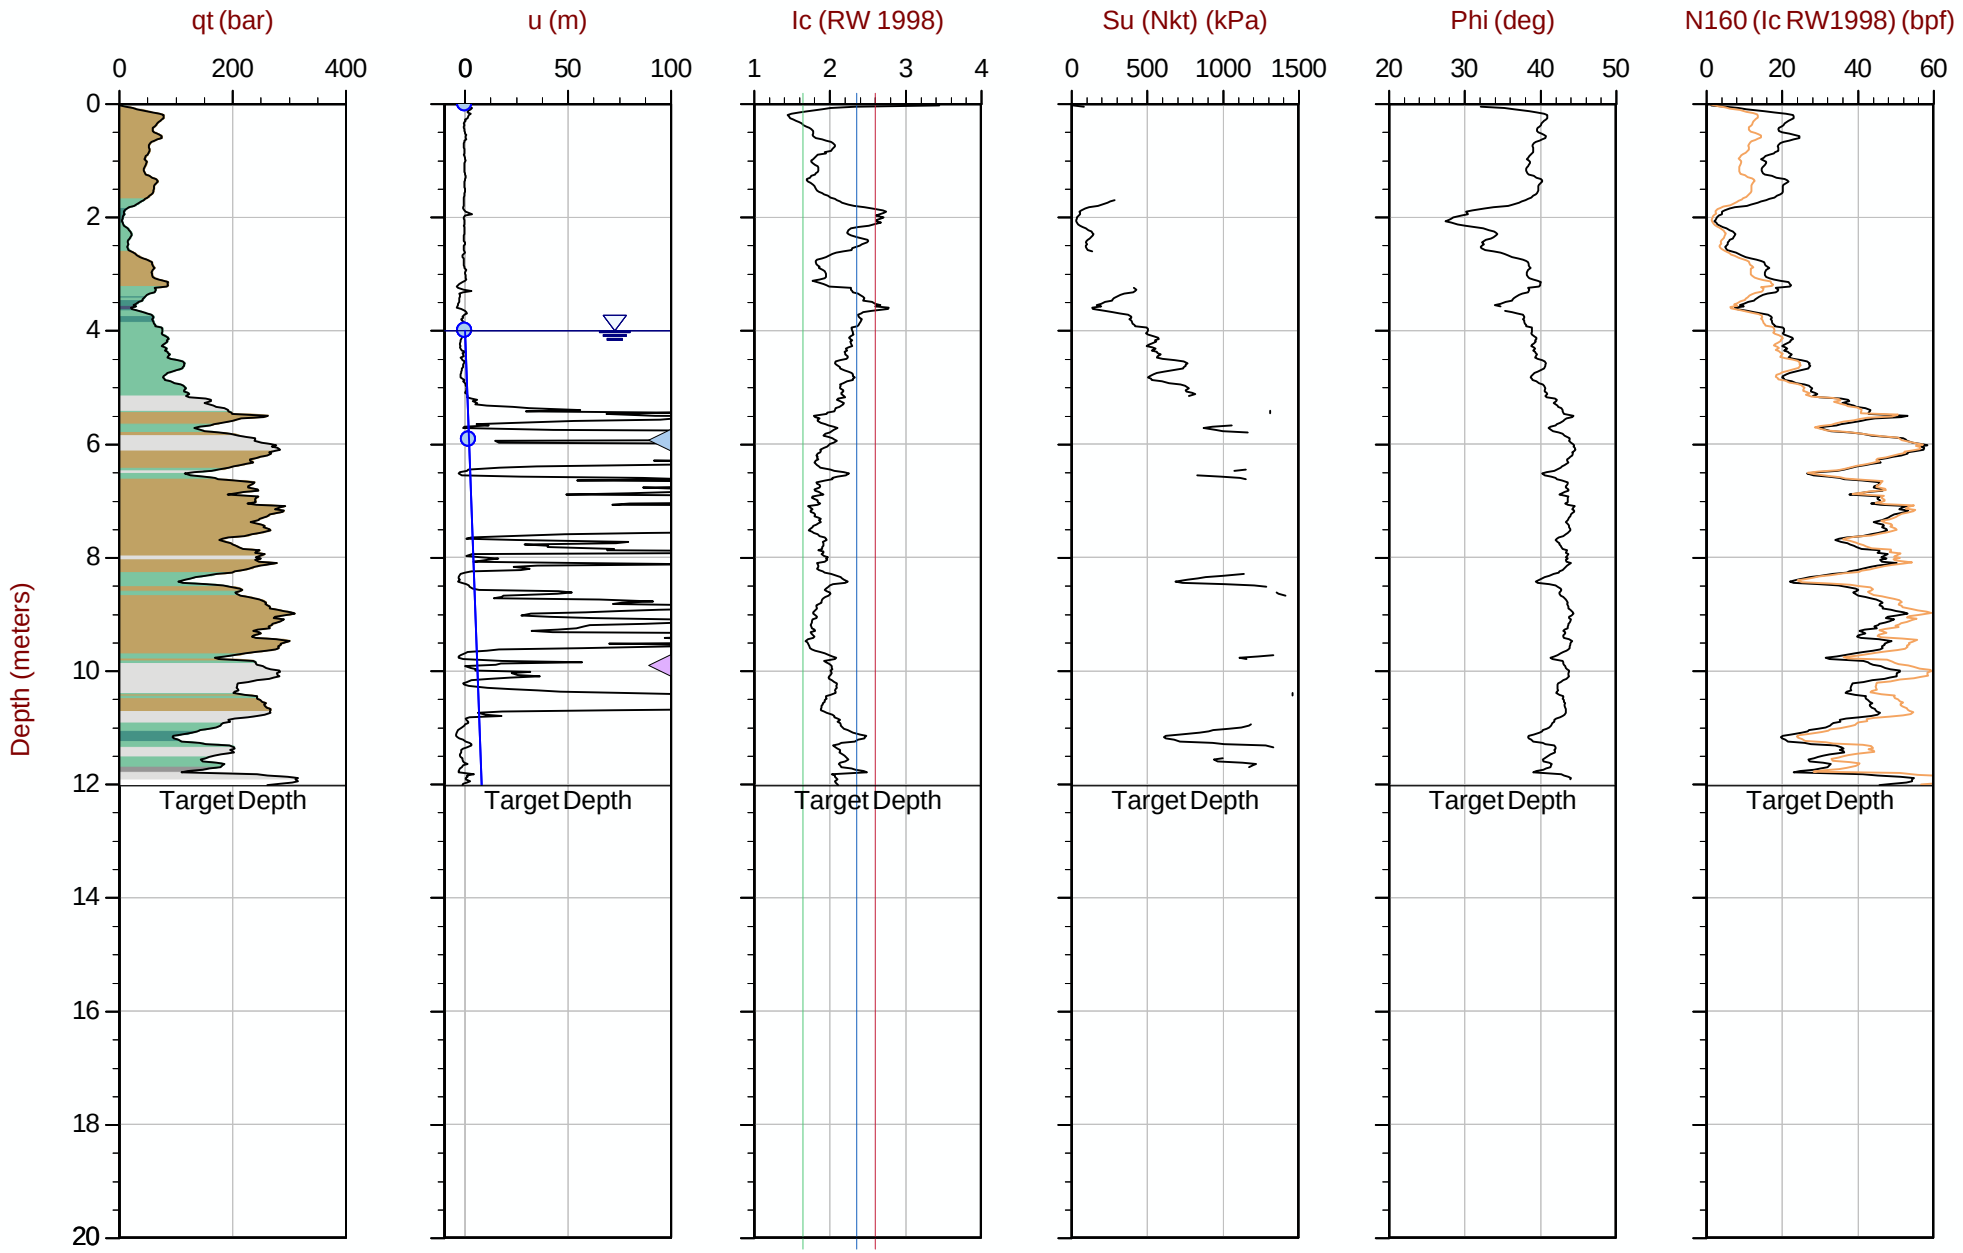

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT239.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610550m E: 416856m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 09:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT240
Cone: 854:T1500F15U35 Area= 15cm2

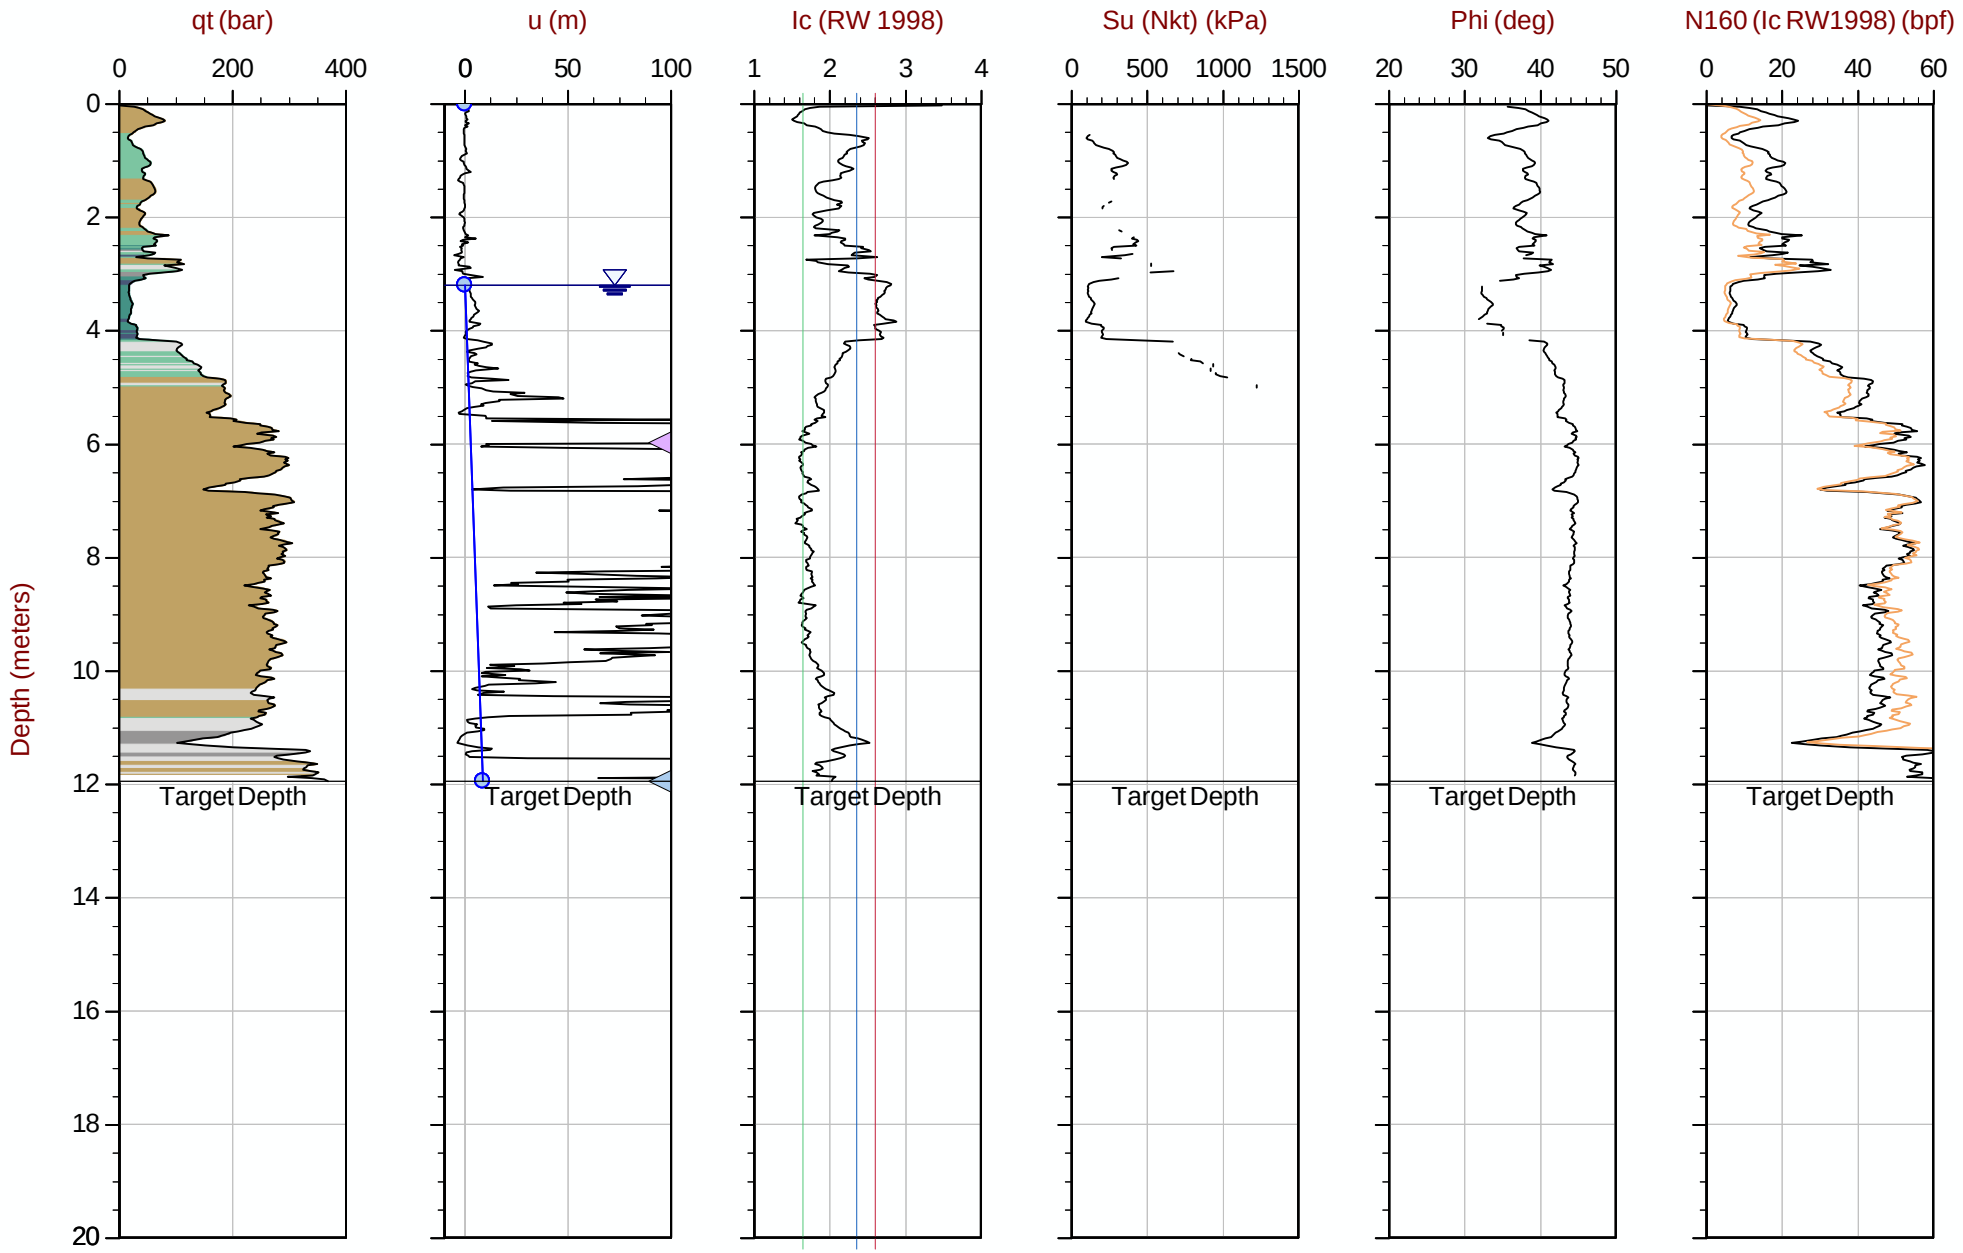

Max Depth: 11.950 m / 39.21 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT240.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610505m E: 416854m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 11:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT241
Cone: 854:T1500F15U35 Area= 15cm2

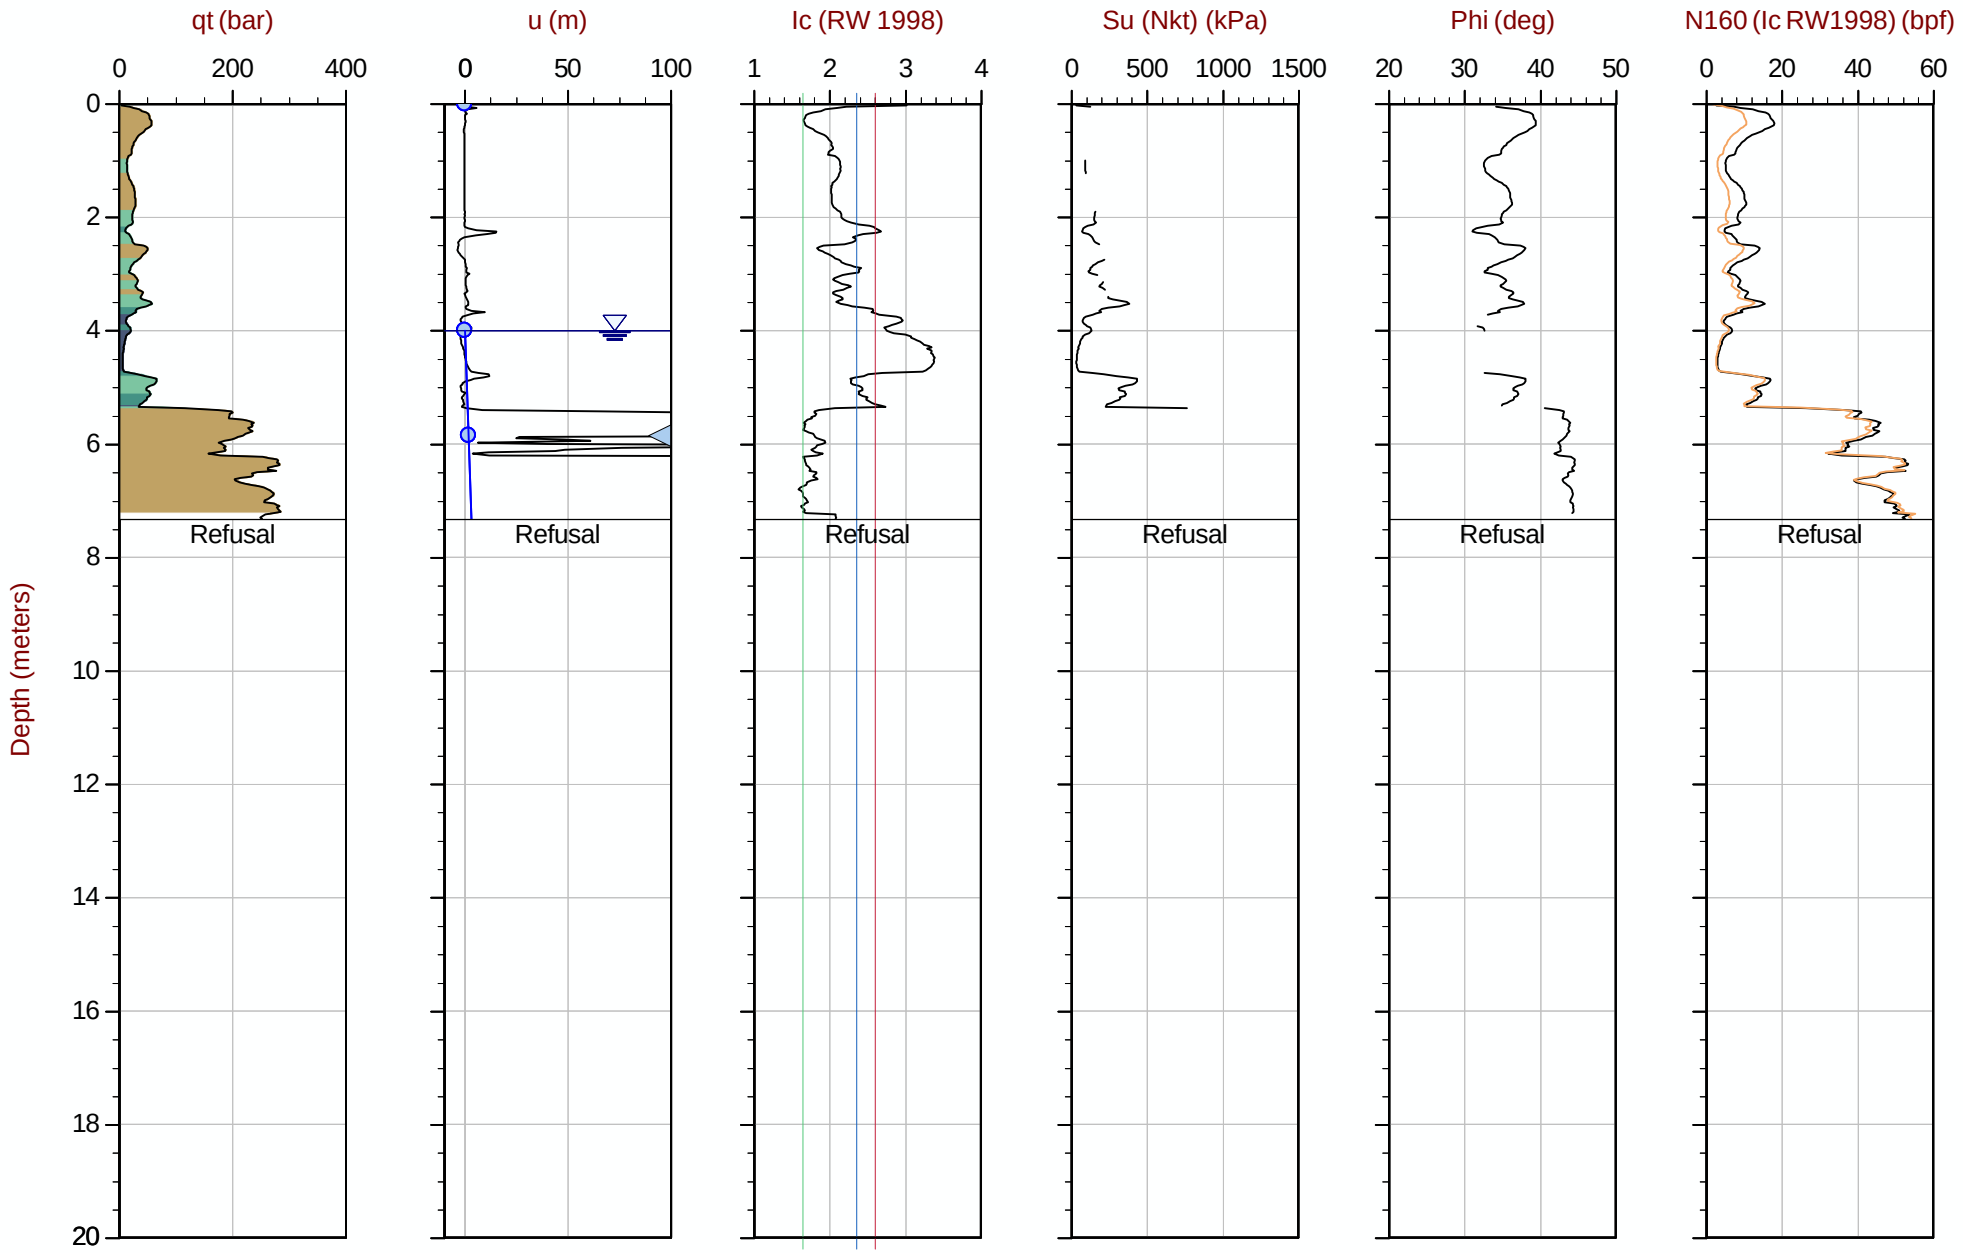

Max Depth: 7.325 m / 24.03 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT241.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610457m E: 416853m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 12:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT242
Cone: 854:T1500F15U35 Area= 15cm2

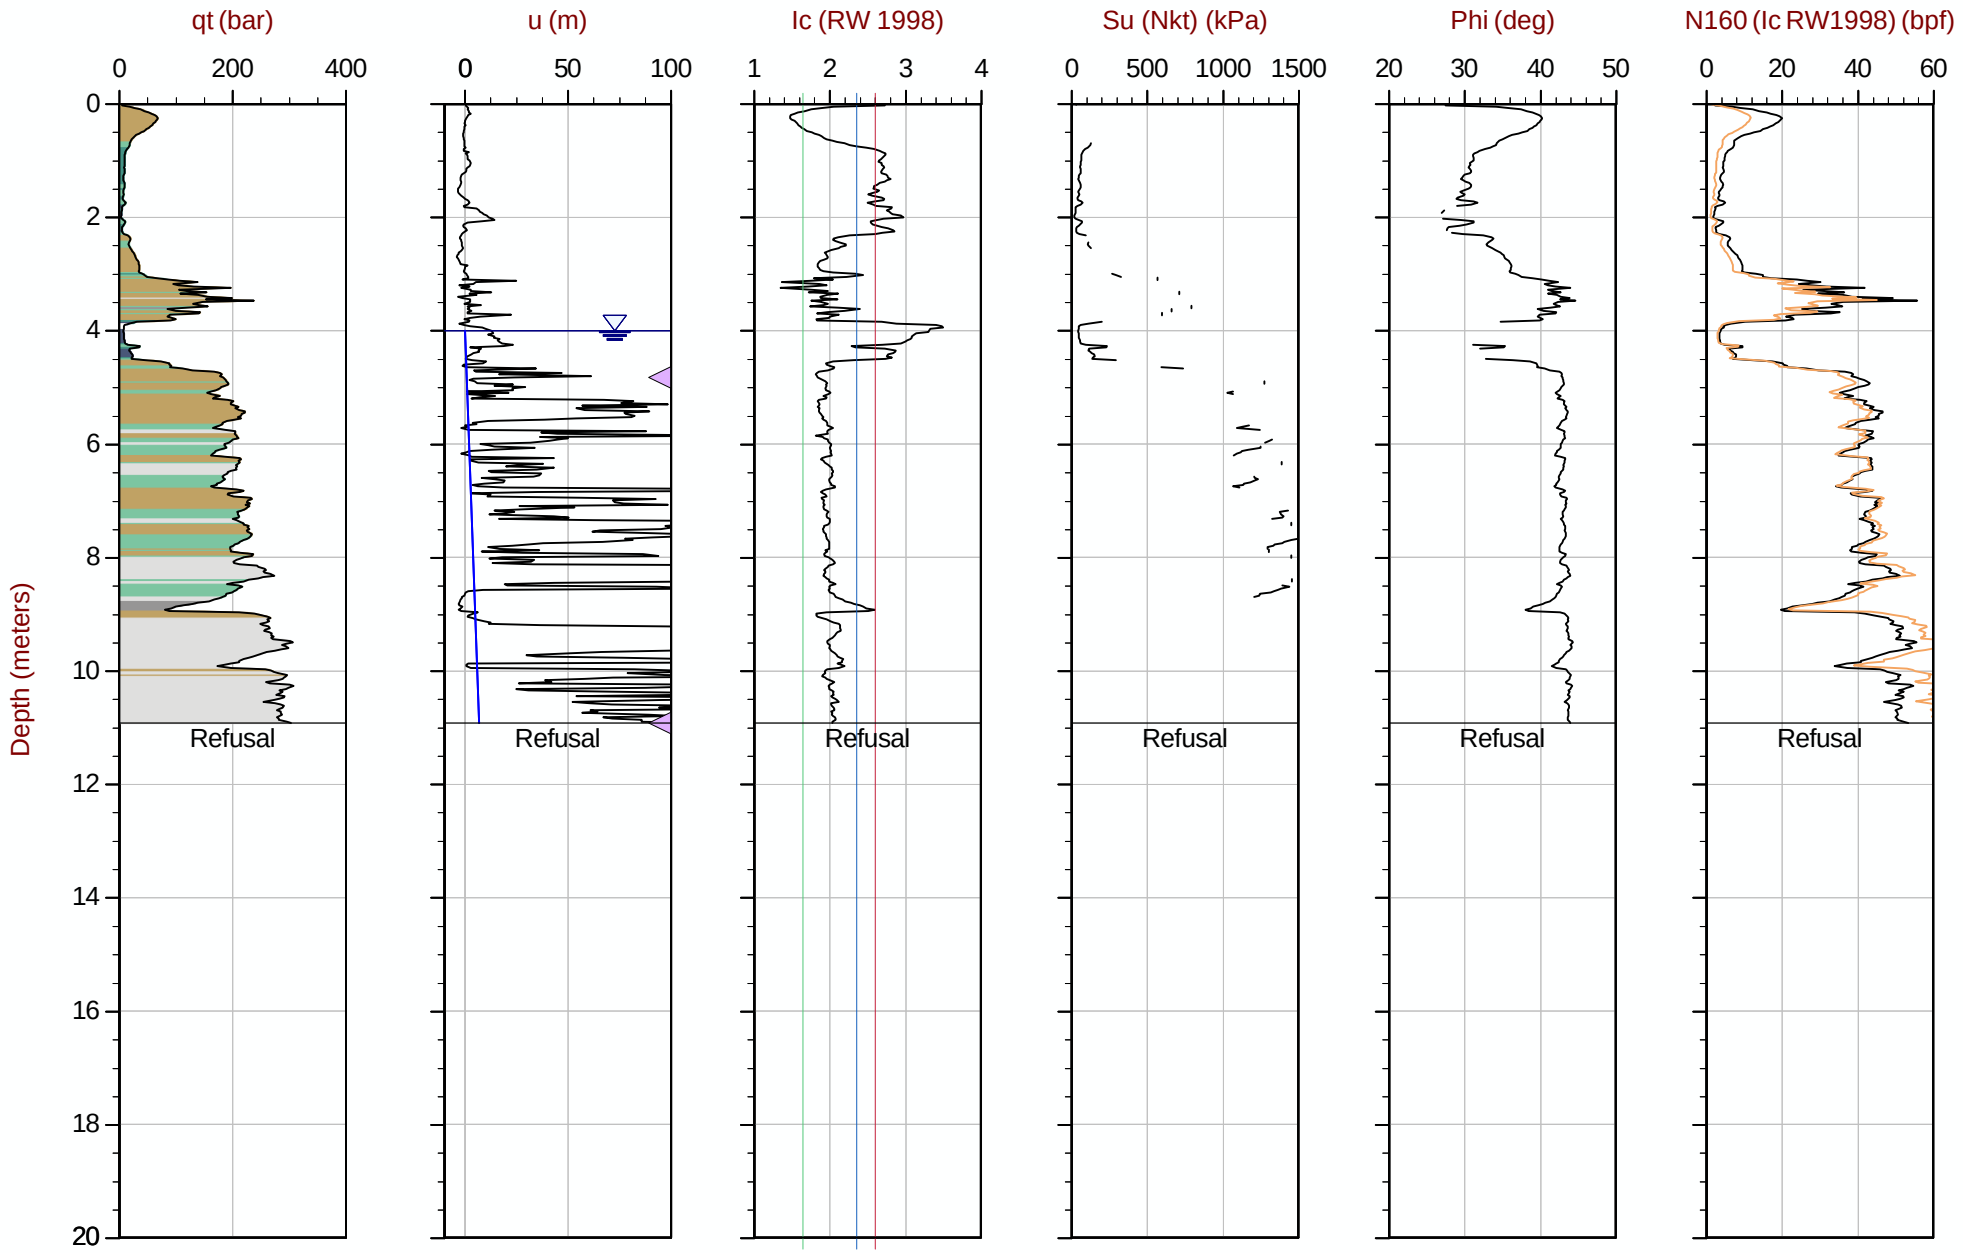

Max Depth: 10.925 m / 35.84 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT242.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610403m E: 416852m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 13:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT243
Cone: 854:T1500F15U35 Area= 15cm2

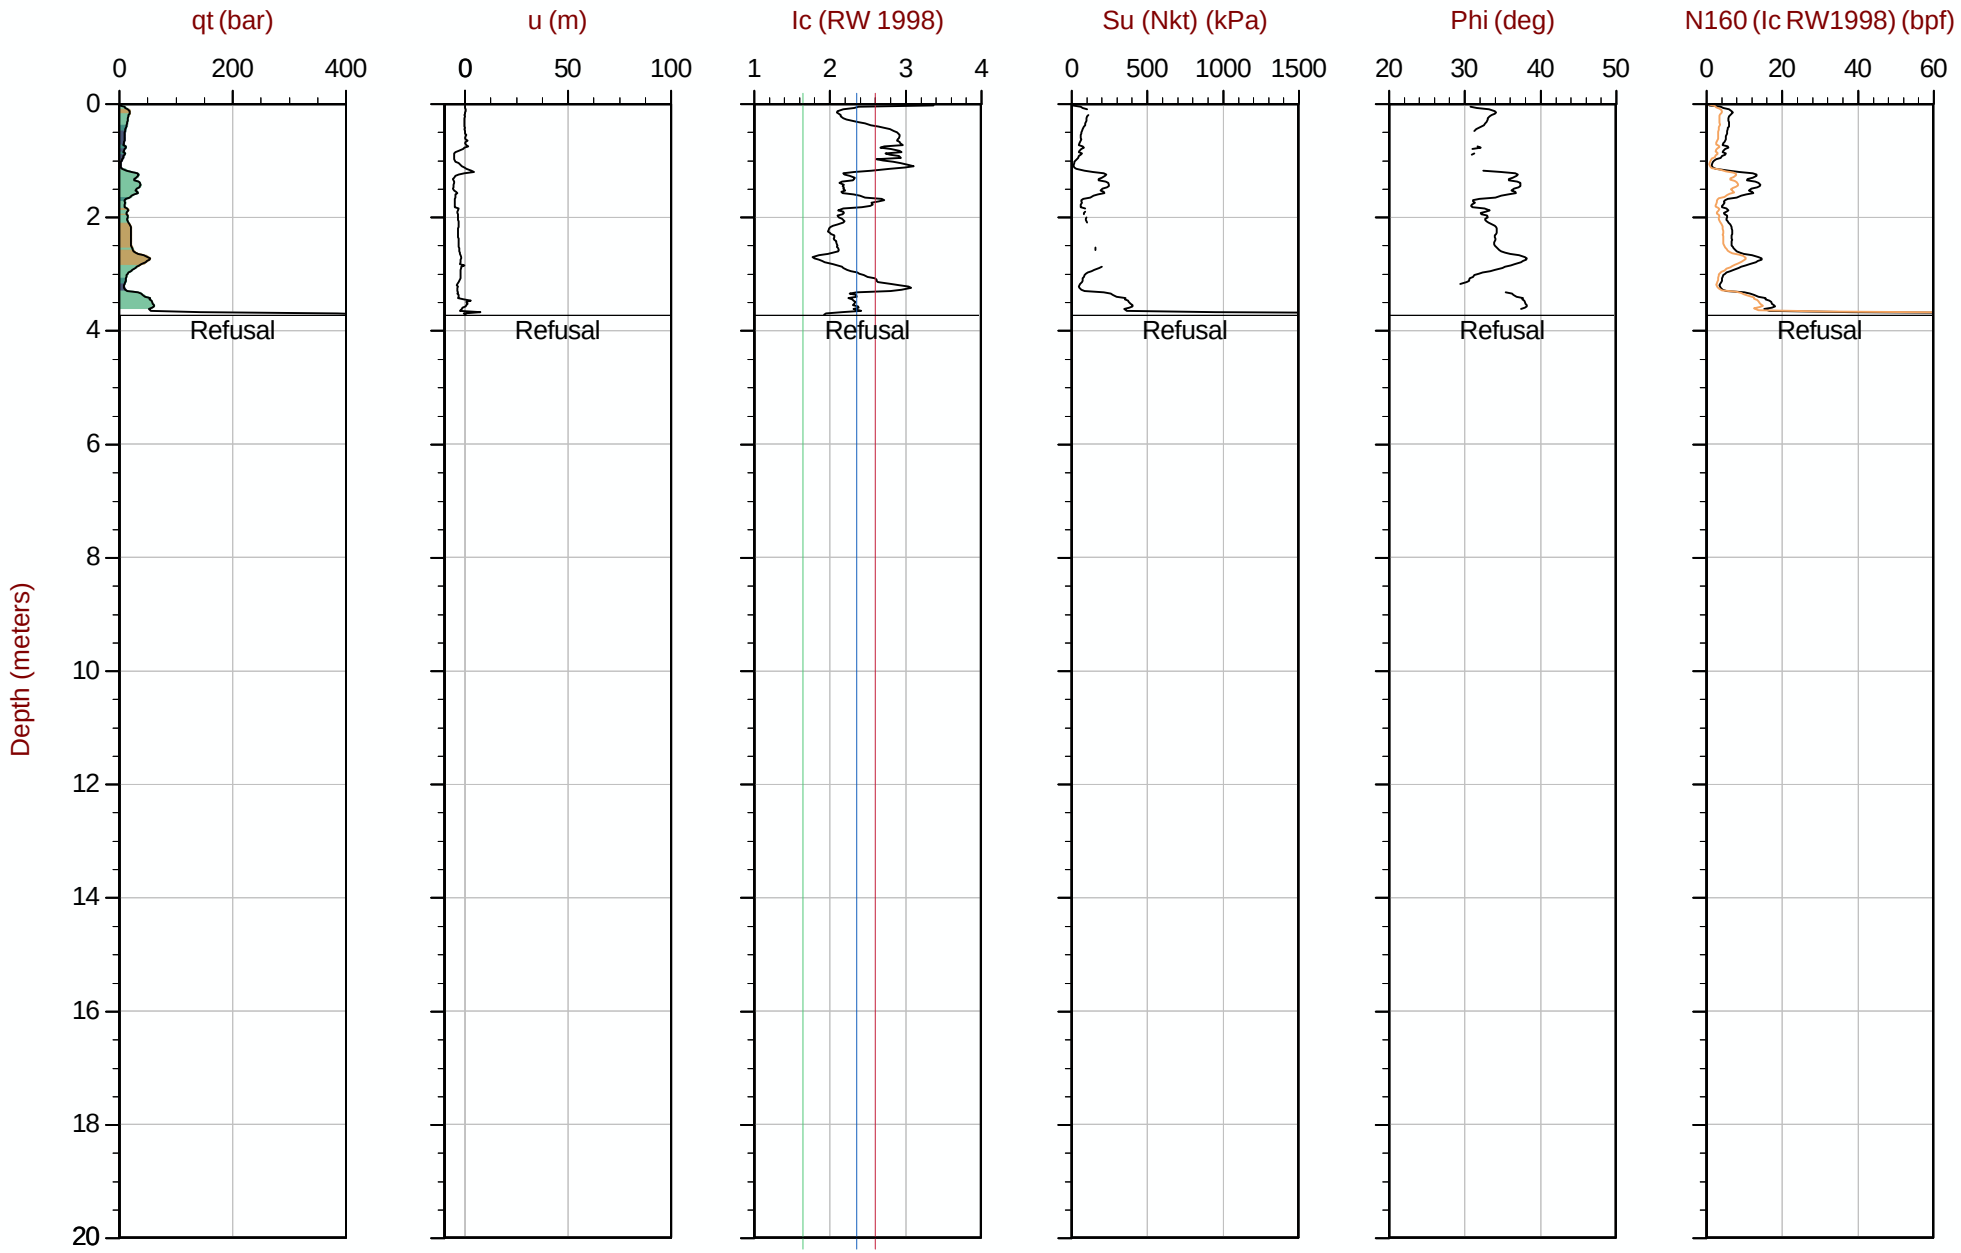

Max Depth: 3.725 m / 12.22 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT243.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610358m E: 416850m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT243A
Cone: 854:T1500F15U35 Area= 15cm2

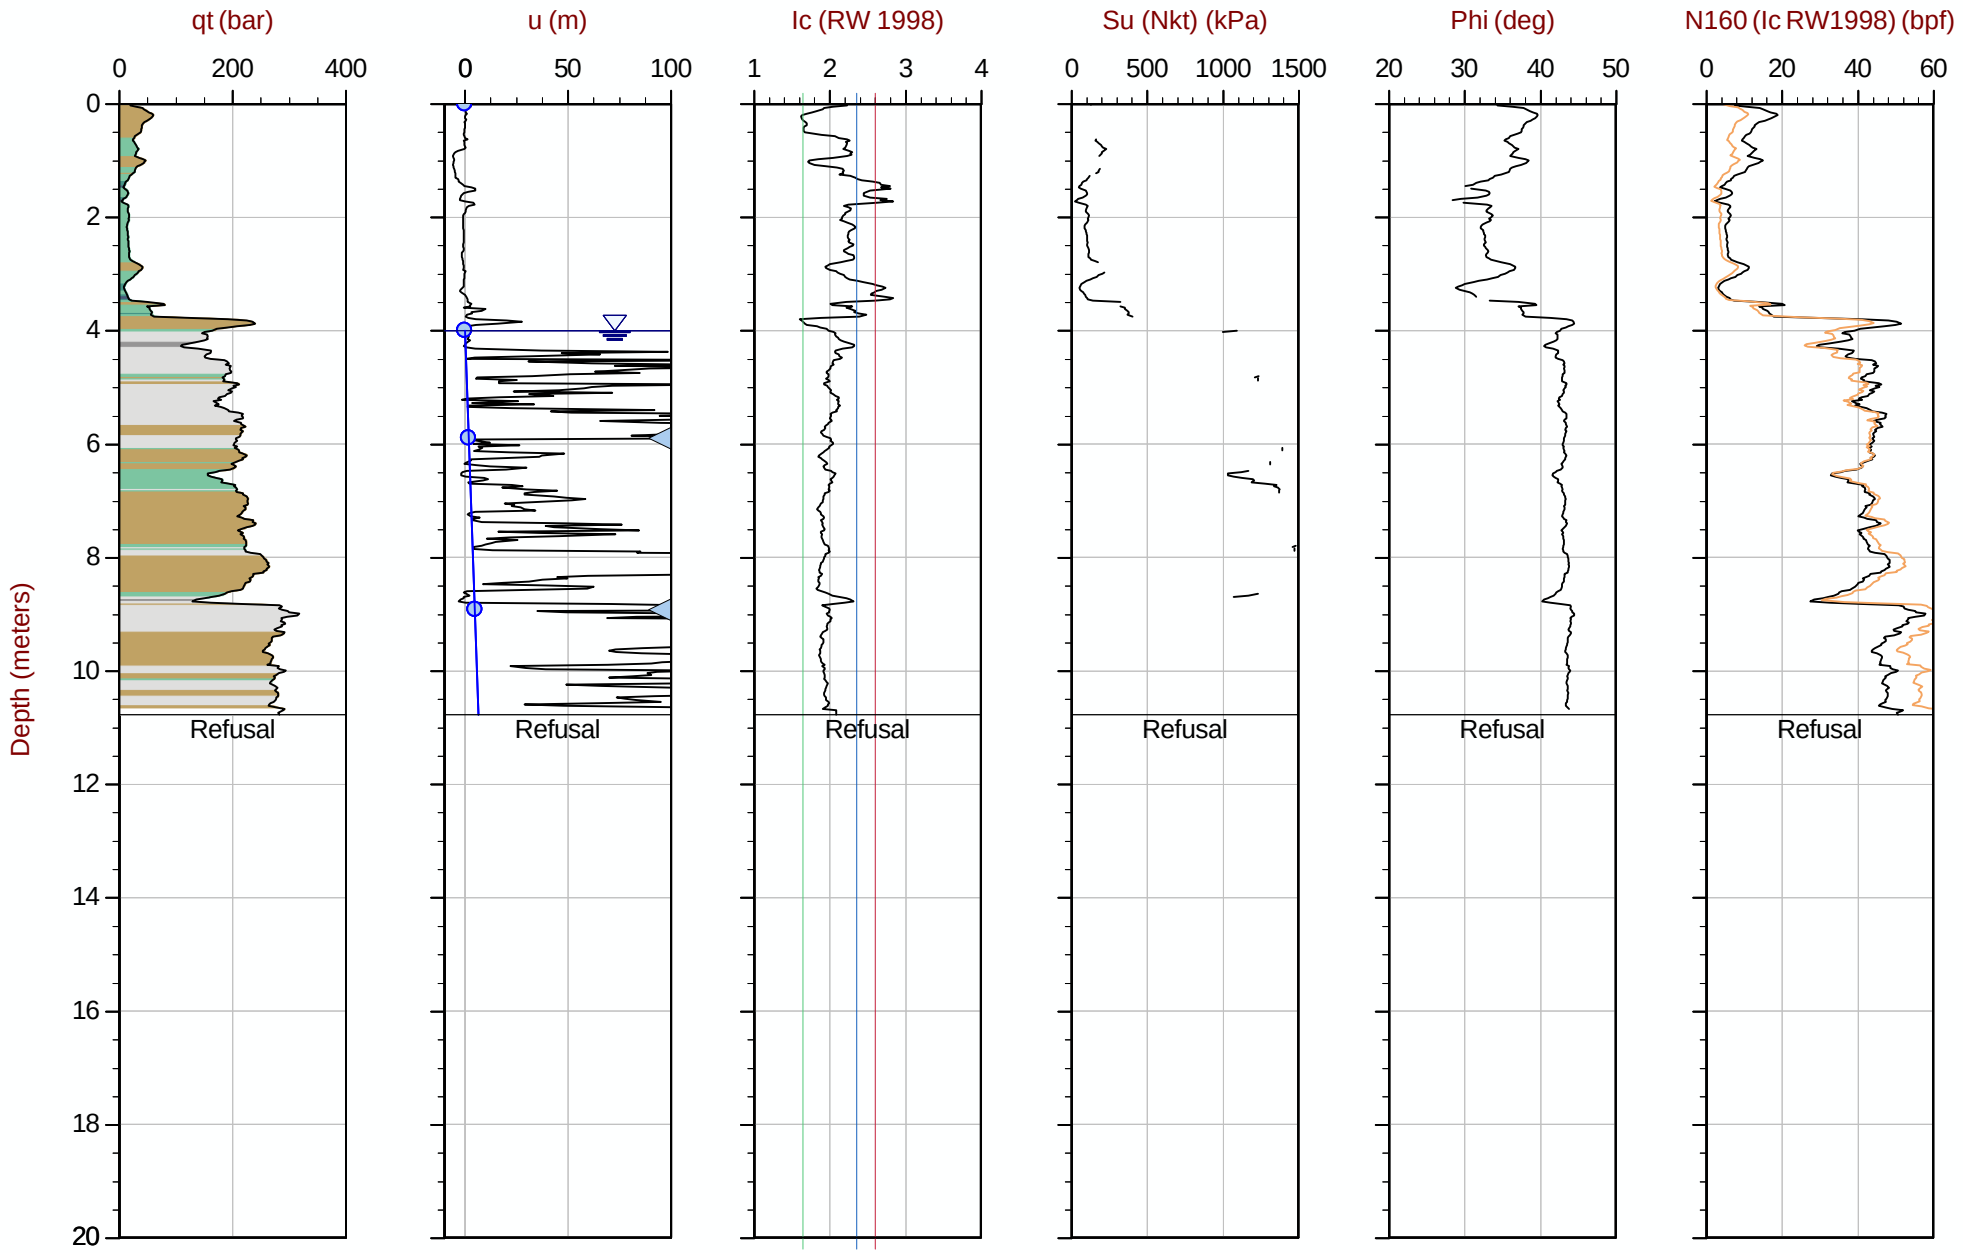

Max Depth: 10.775 m / 35.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT243A.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610358m E: 416850m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 15:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT244
Cone: 854:T1500F15U35 Area= 15cm2

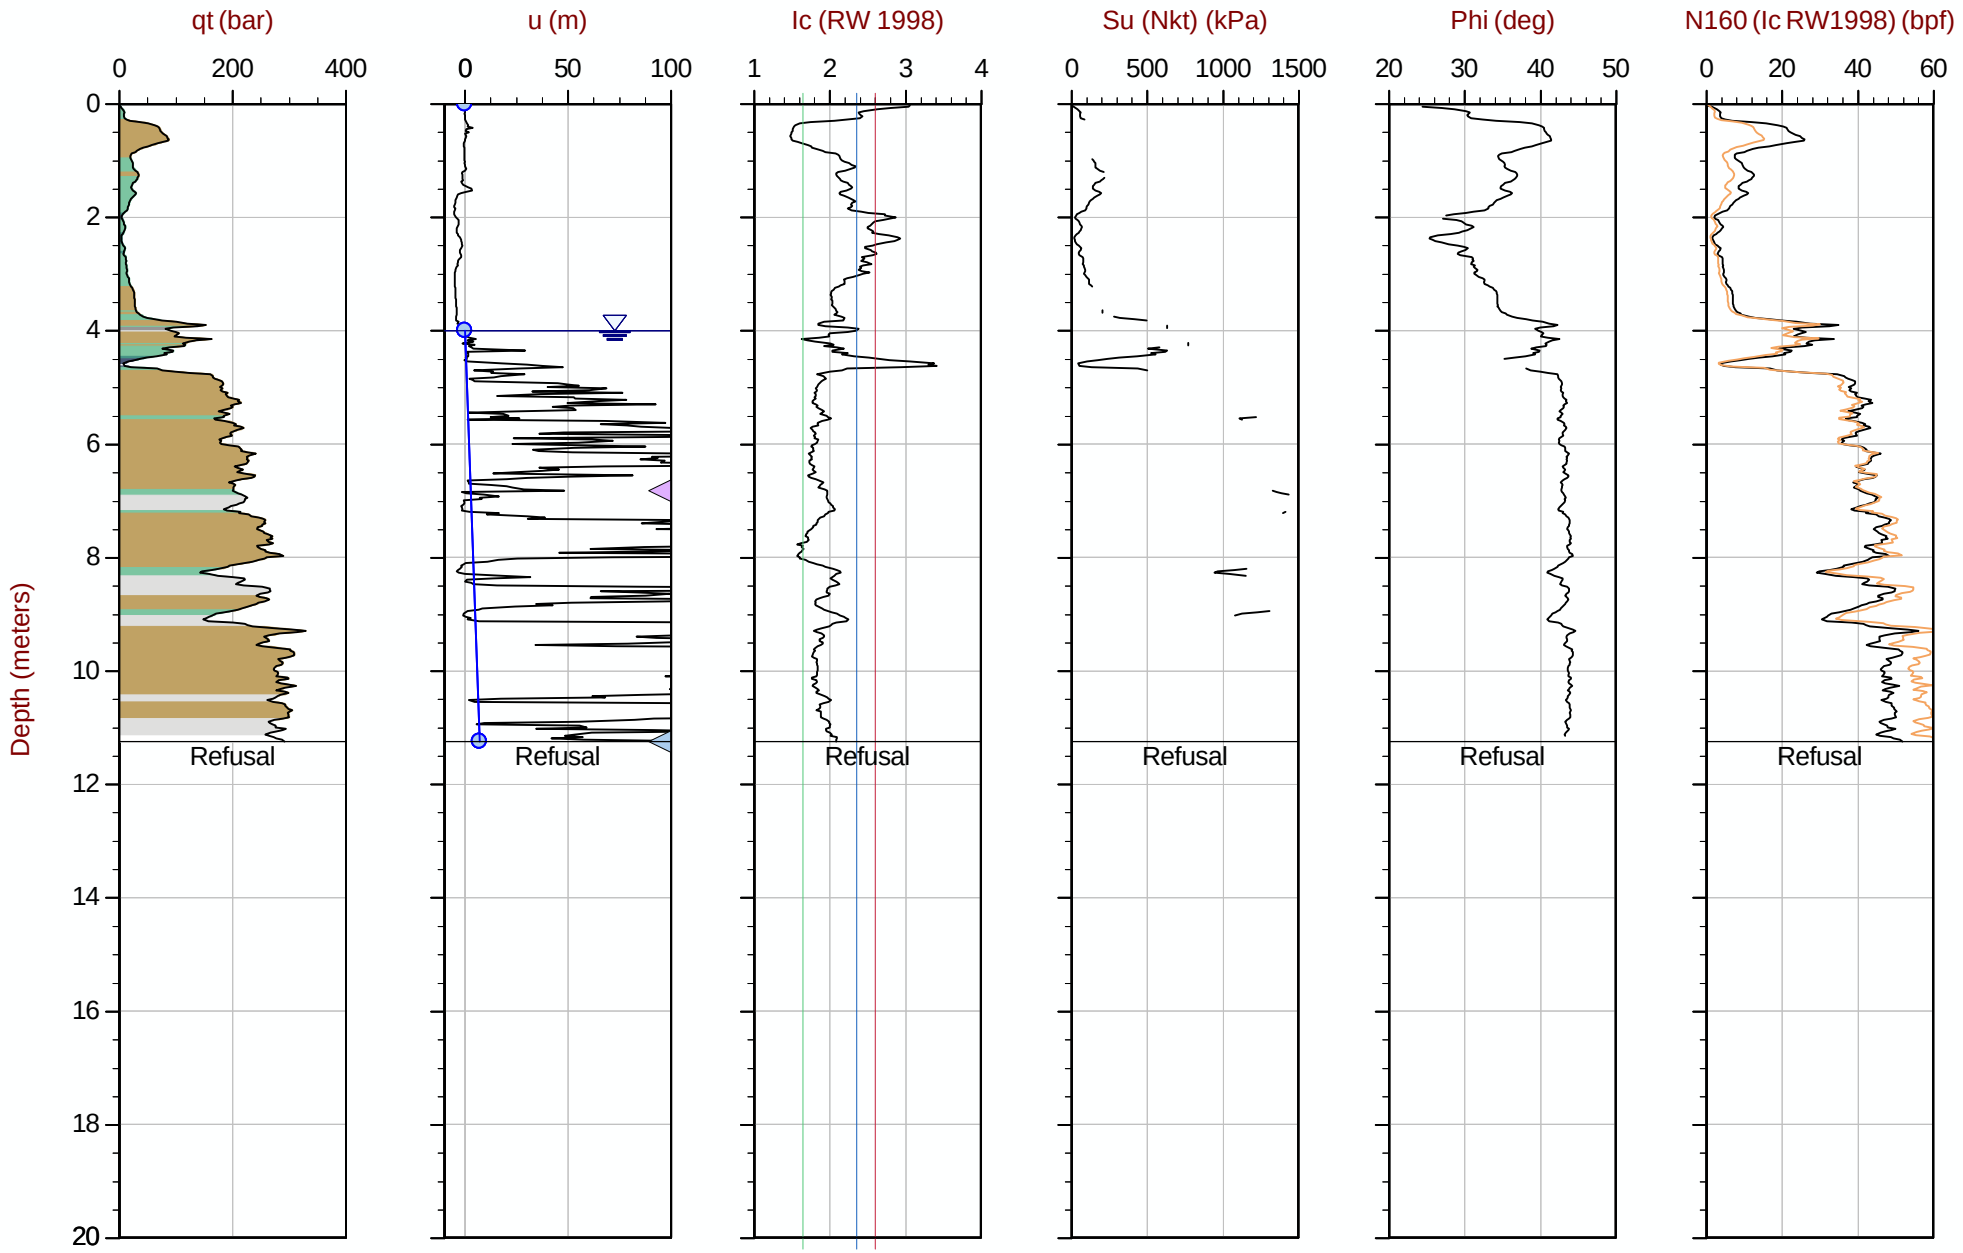

Max Depth: 11.250 m / 36.91 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT244.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610306m E: 416849m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 17:12
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT245
Cone: 854:T1500F15U35 Area= 15cm2

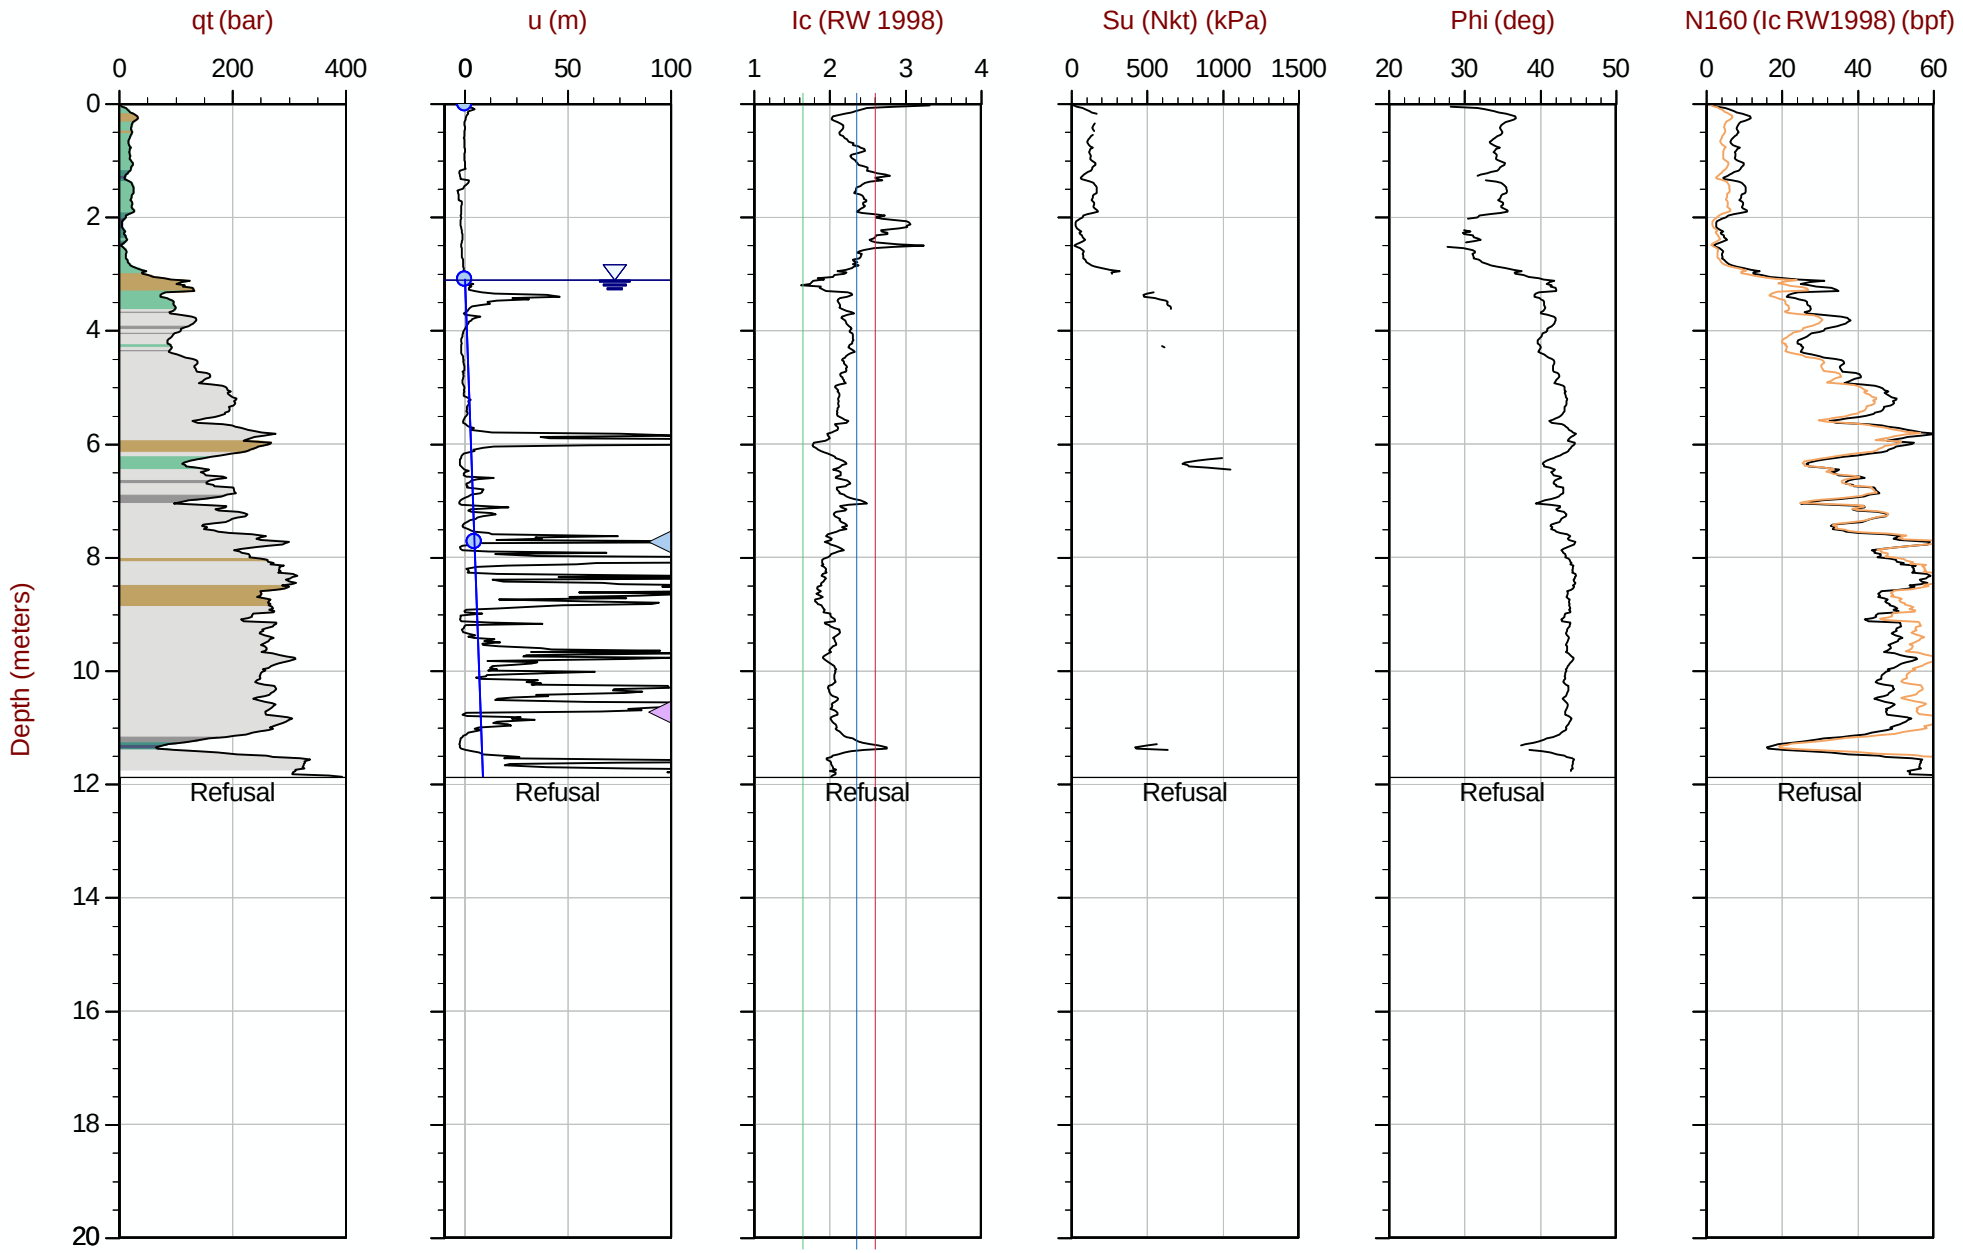

Max Depth: 11.875 m / 38.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT245.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610257m E: 416848m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 13:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT246
Cone: 854:T1500F15U35 Area= 15cm2

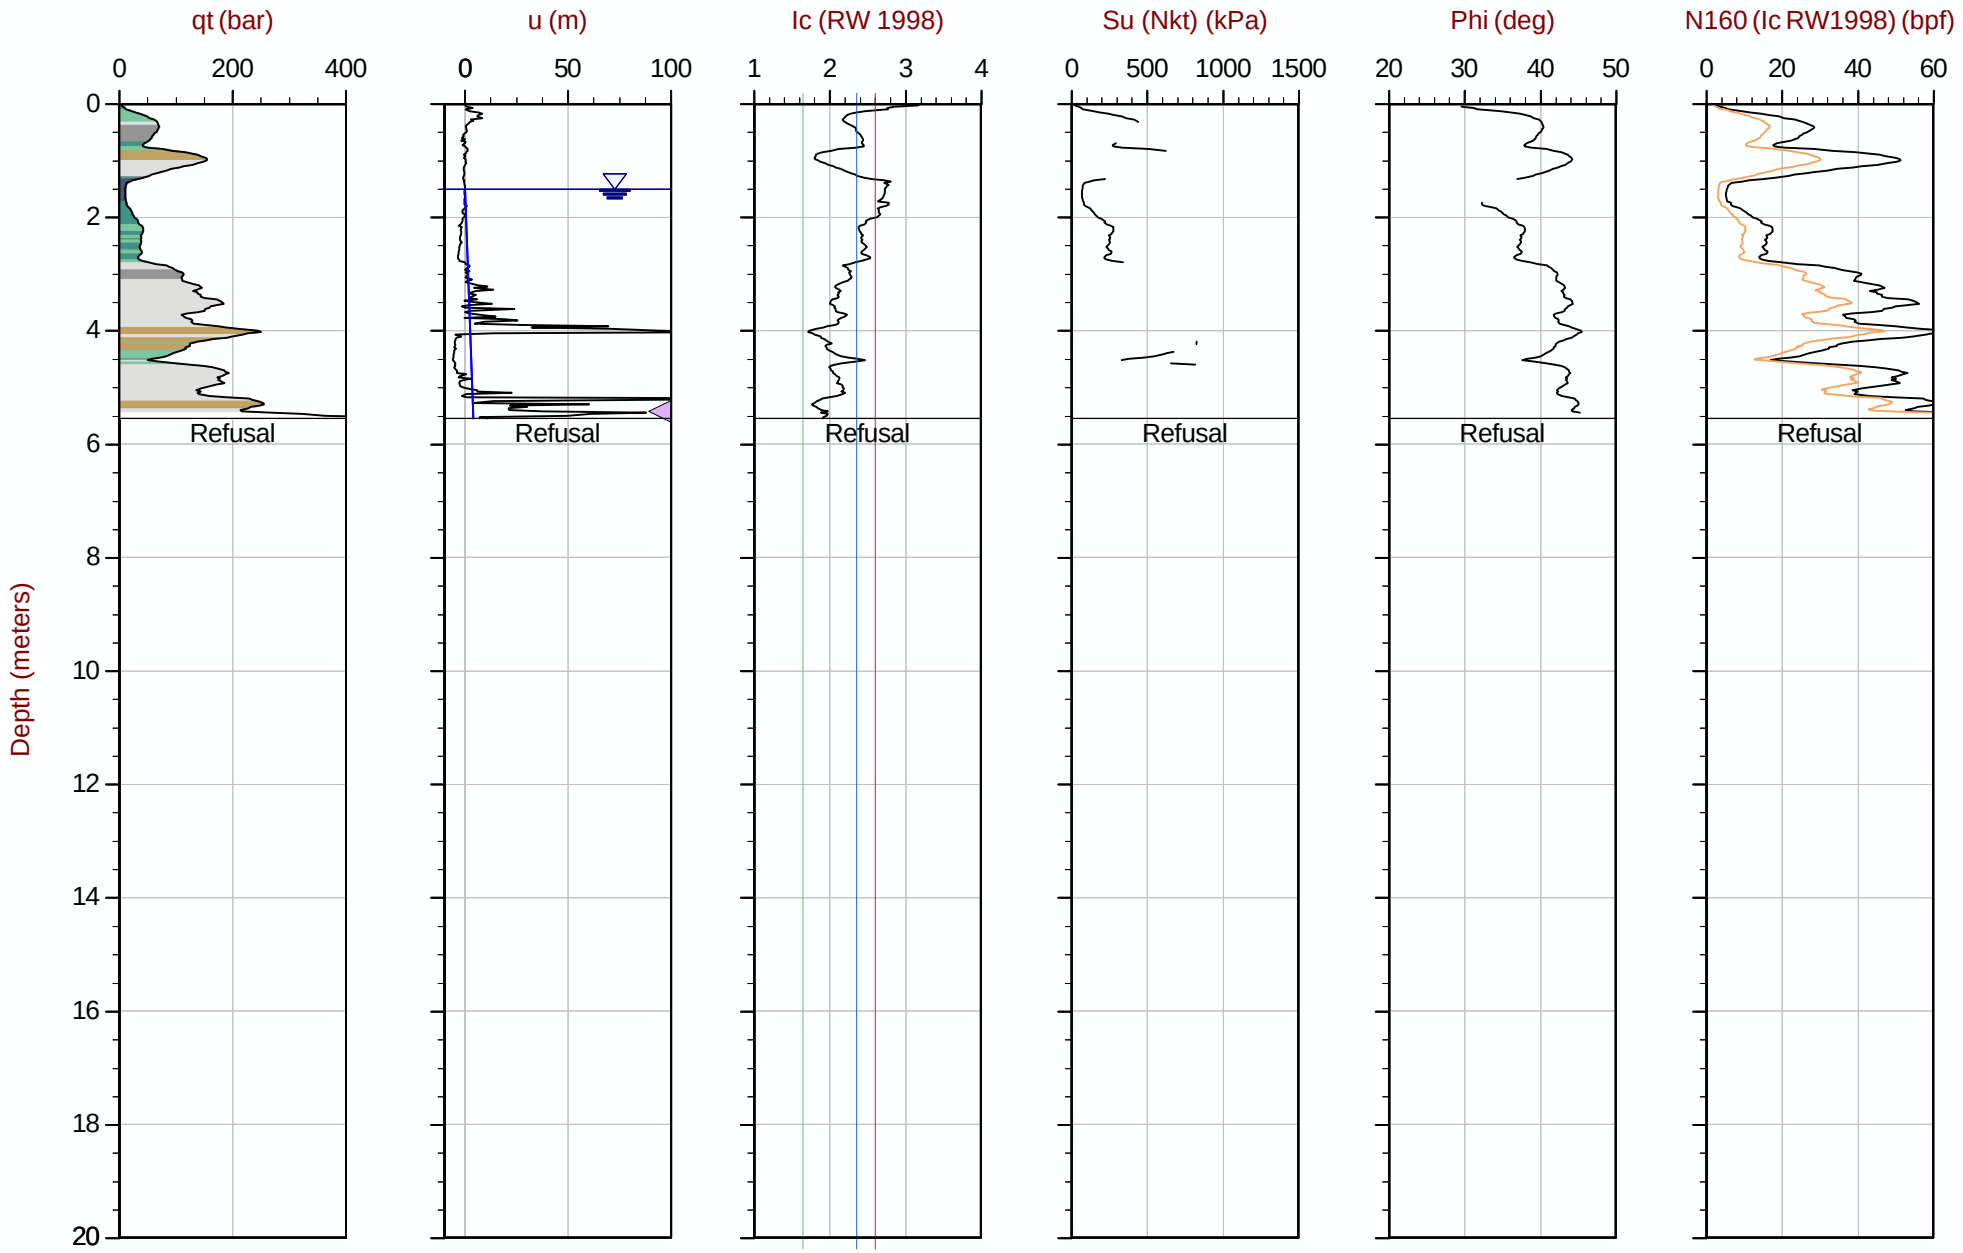

Max Depth: 5.550 m / 18.21 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT246.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610206m E: 416846m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 06:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT247
Cone: 854:T1500F15U35 Area= 15cm2

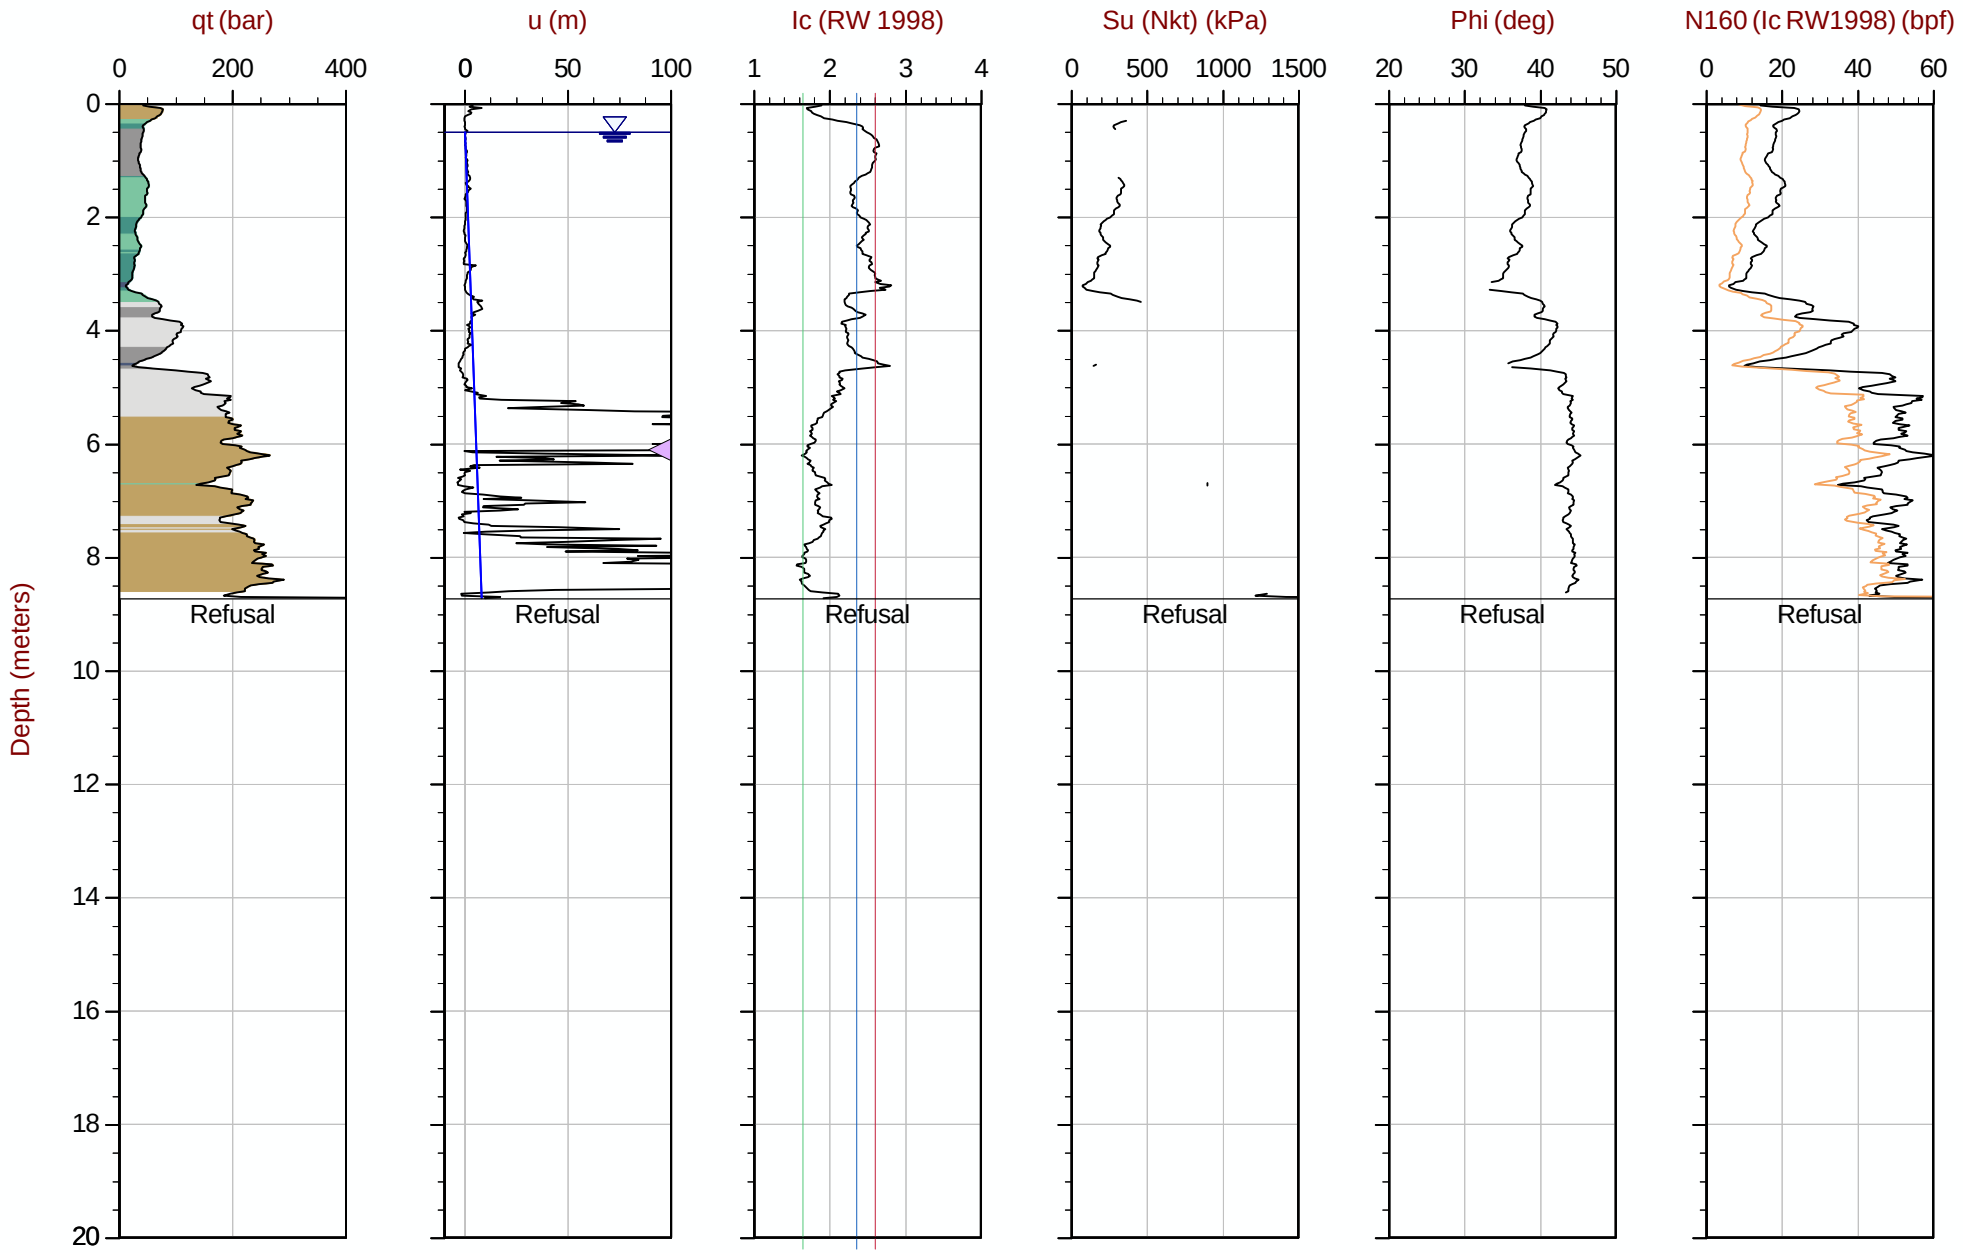

Max Depth: 8.725 m / 28.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT247.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610158m E: 416845m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 08:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT248
Cone: 854:T1500F15U35 Area= 15cm2

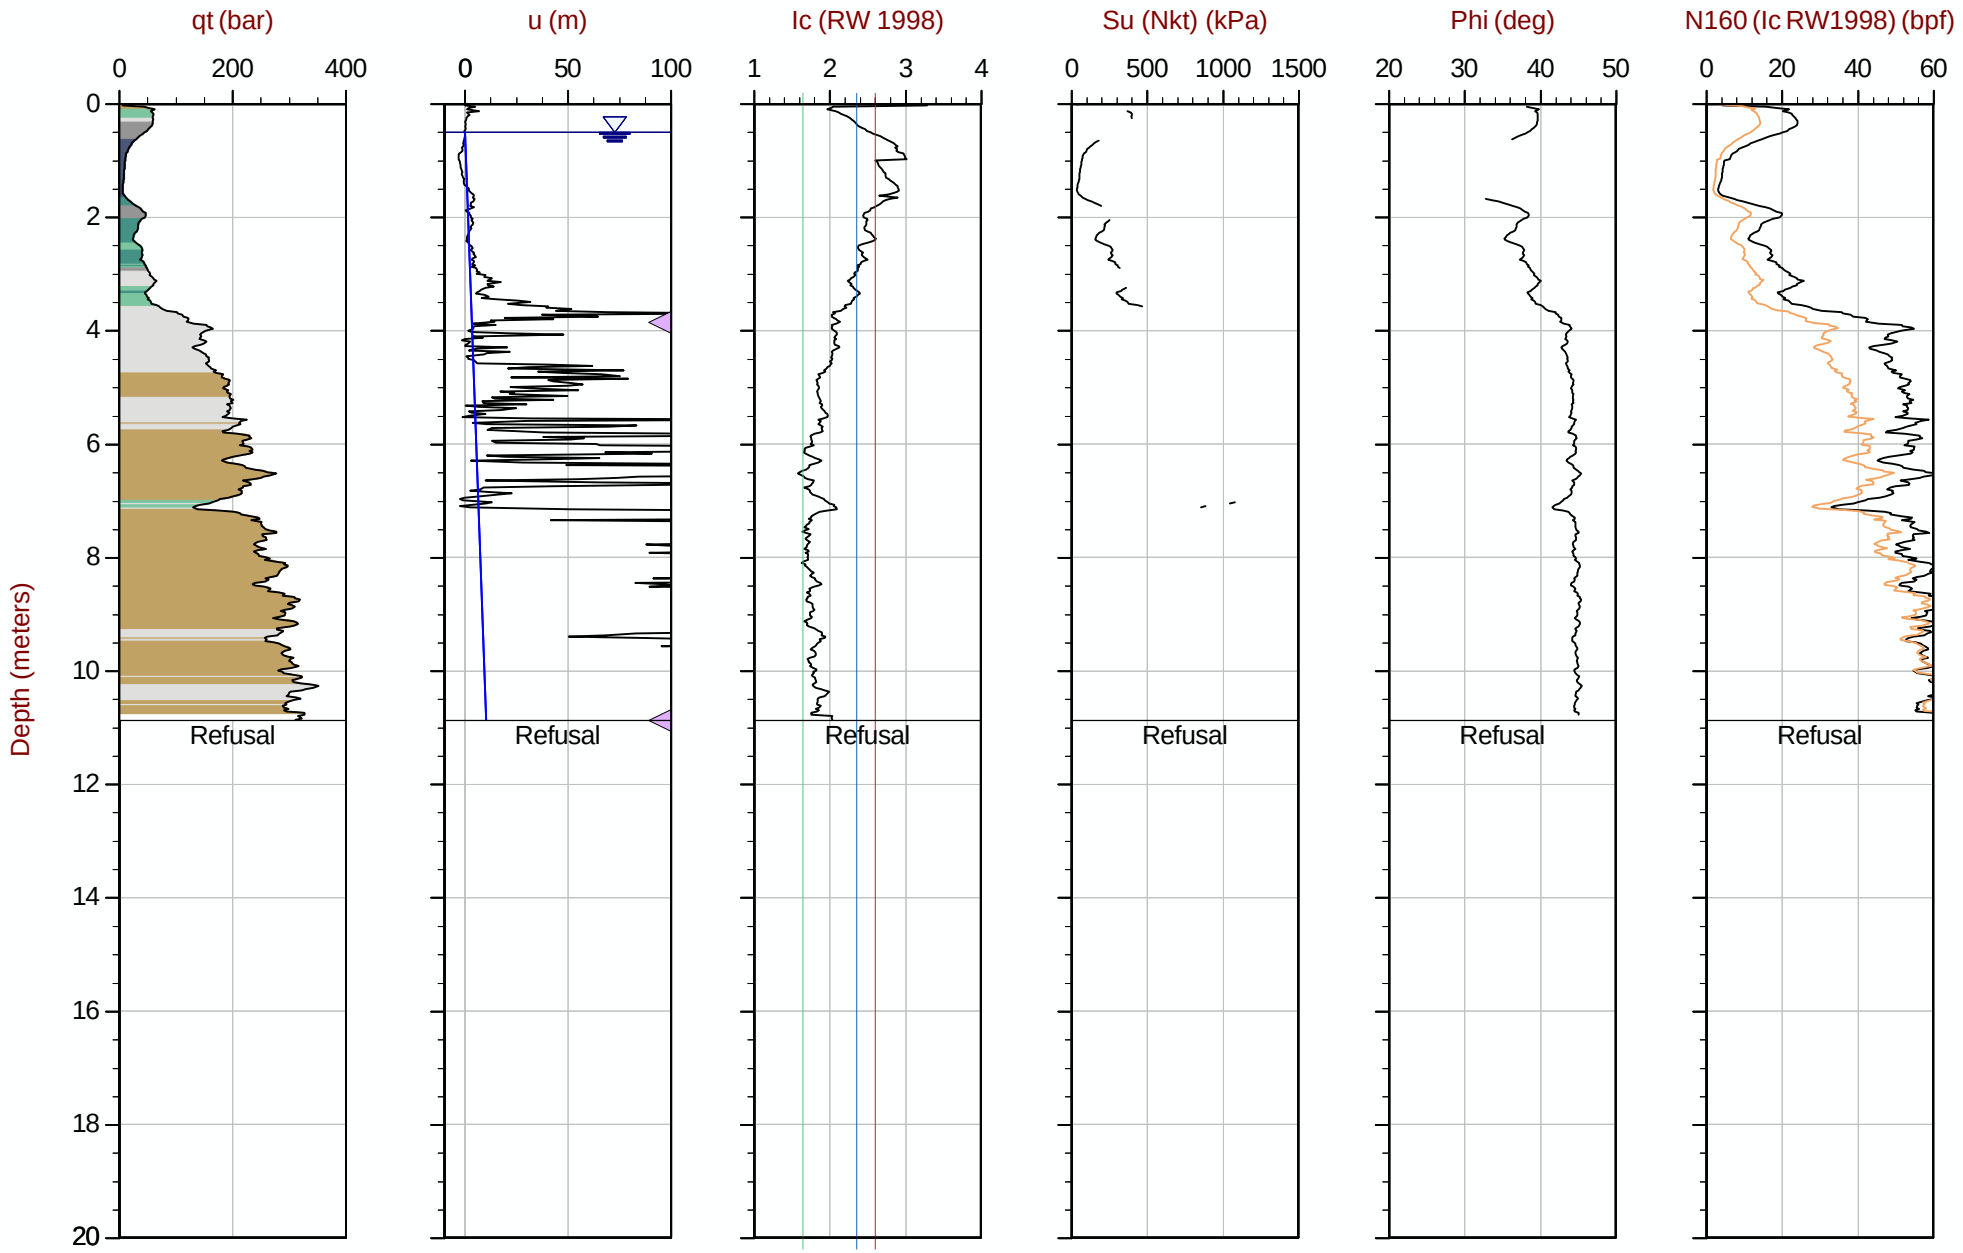

Max Depth: 10.875 m / 35.68 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT248.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610104m E: 416844m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 11:28
Site: Brooks, Alberta

Sounding: RCPT22-22CPT249
Cone: 854:T1500F15U35 Area= 15cm2

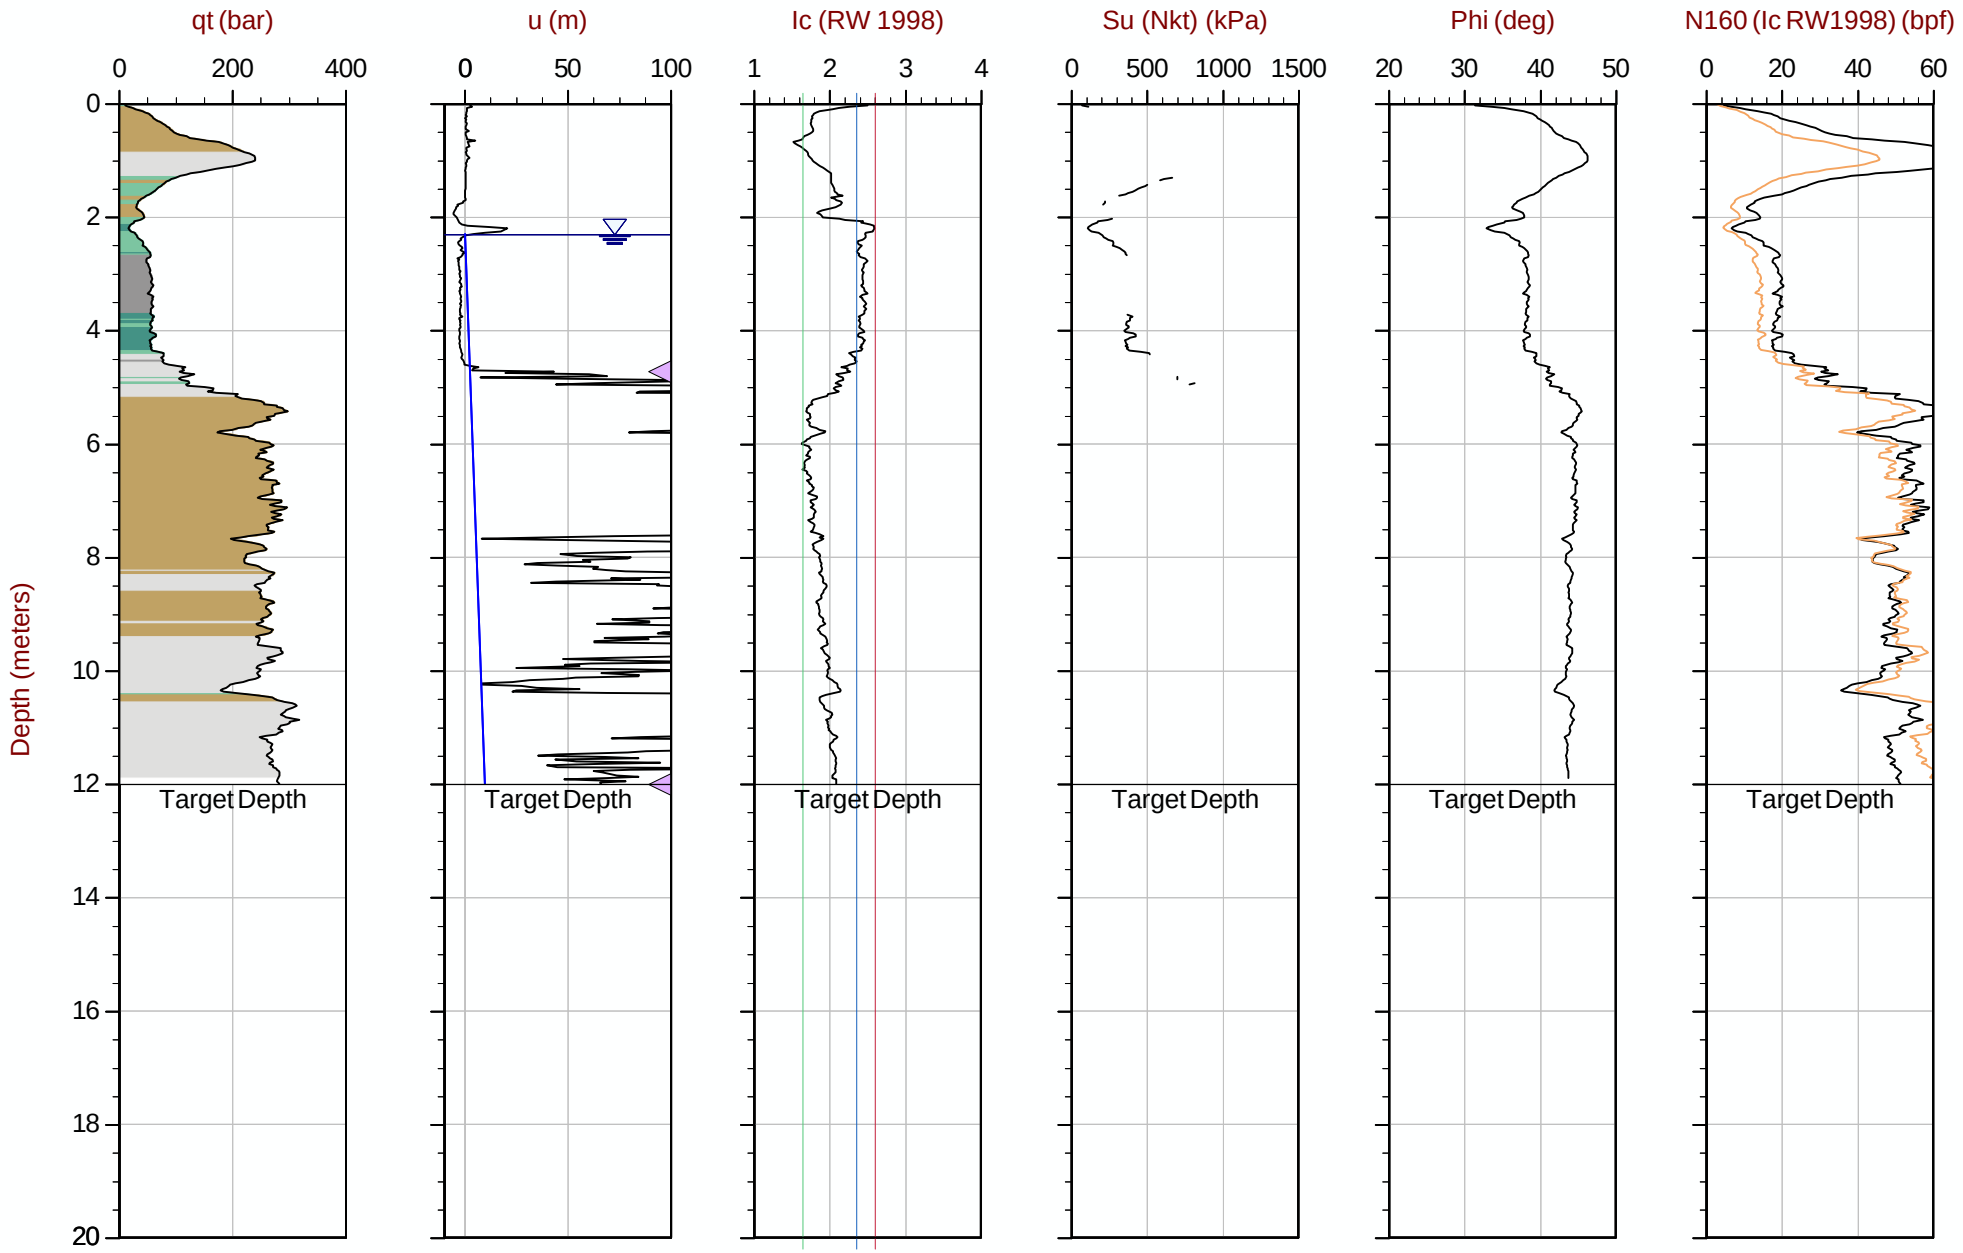

Max Depth: 12.000 m / 39.37 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT249.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610060m E: 416844m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 12:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT250
Cone: 854:T1500F15U35 Area= 15cm2

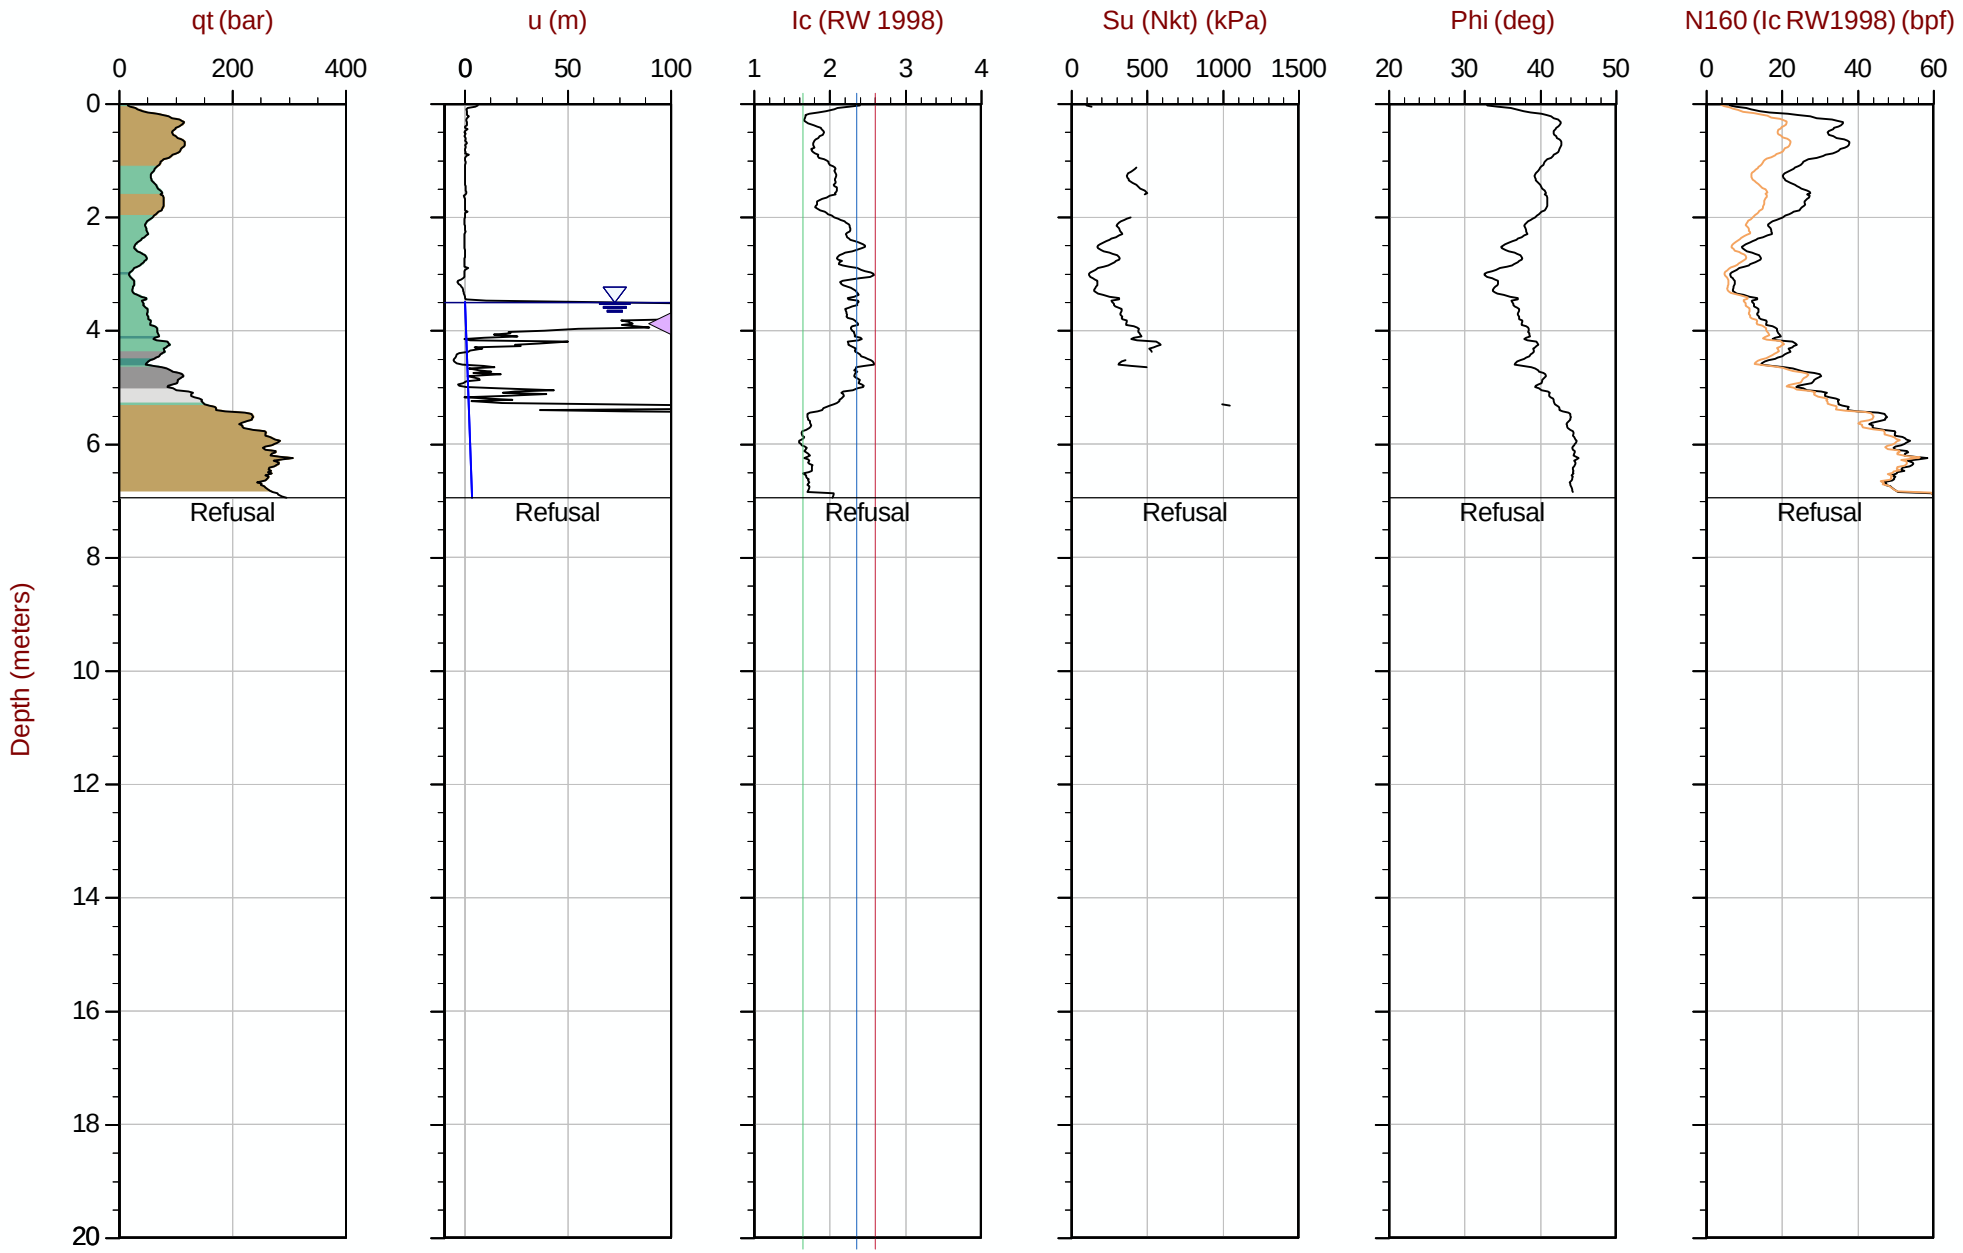

Max Depth: 6.950 m / 22.80 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT250.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610009m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 13:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT251
Cone: 854:T1500F15U35 Area= 15cm2

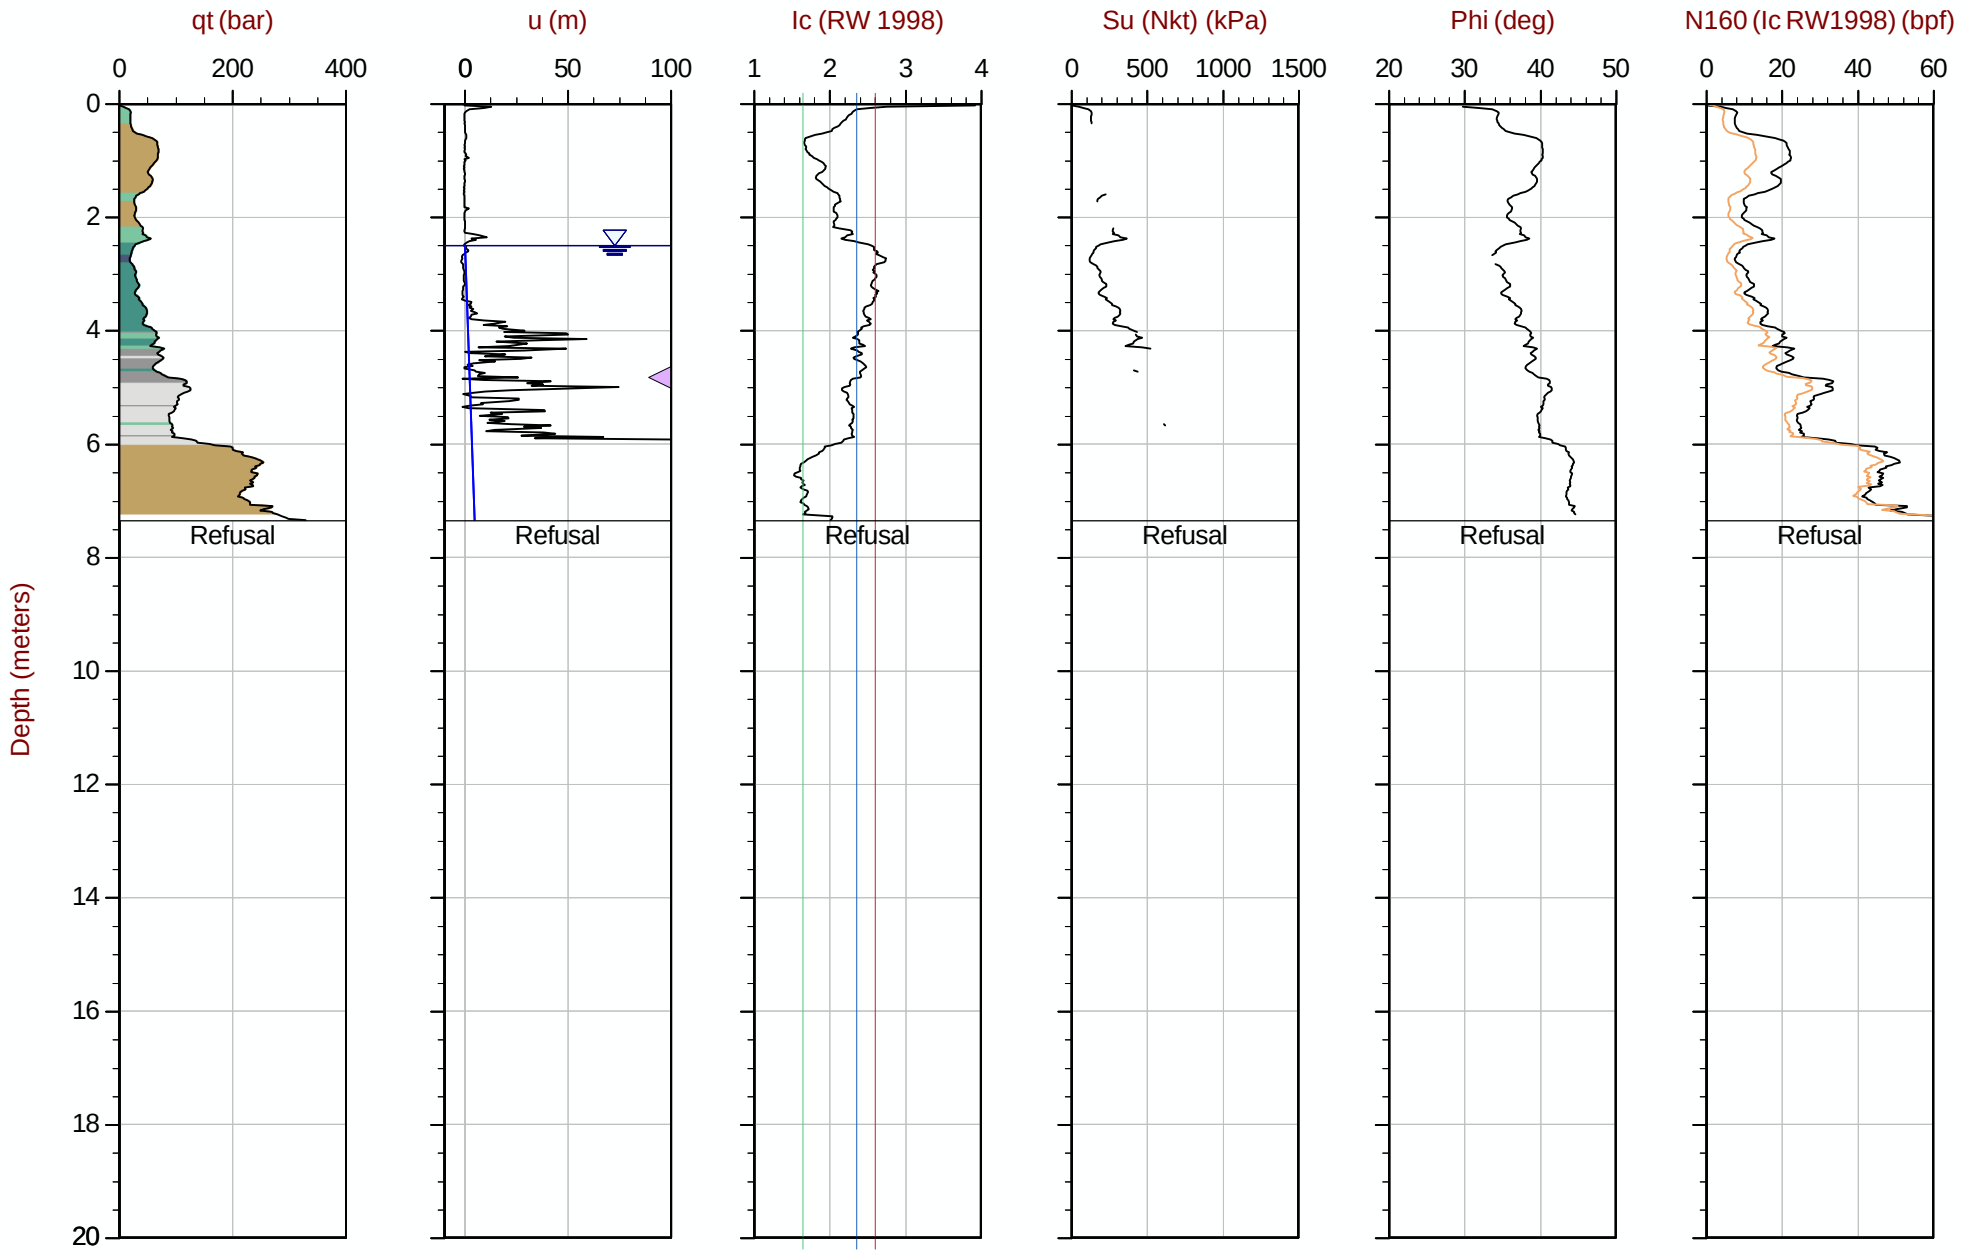

Max Depth: 7.350 m / 24.11 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT251.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609960m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 15:05
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT252
Cone: 854:T1500F15U35 Area= 15cm2

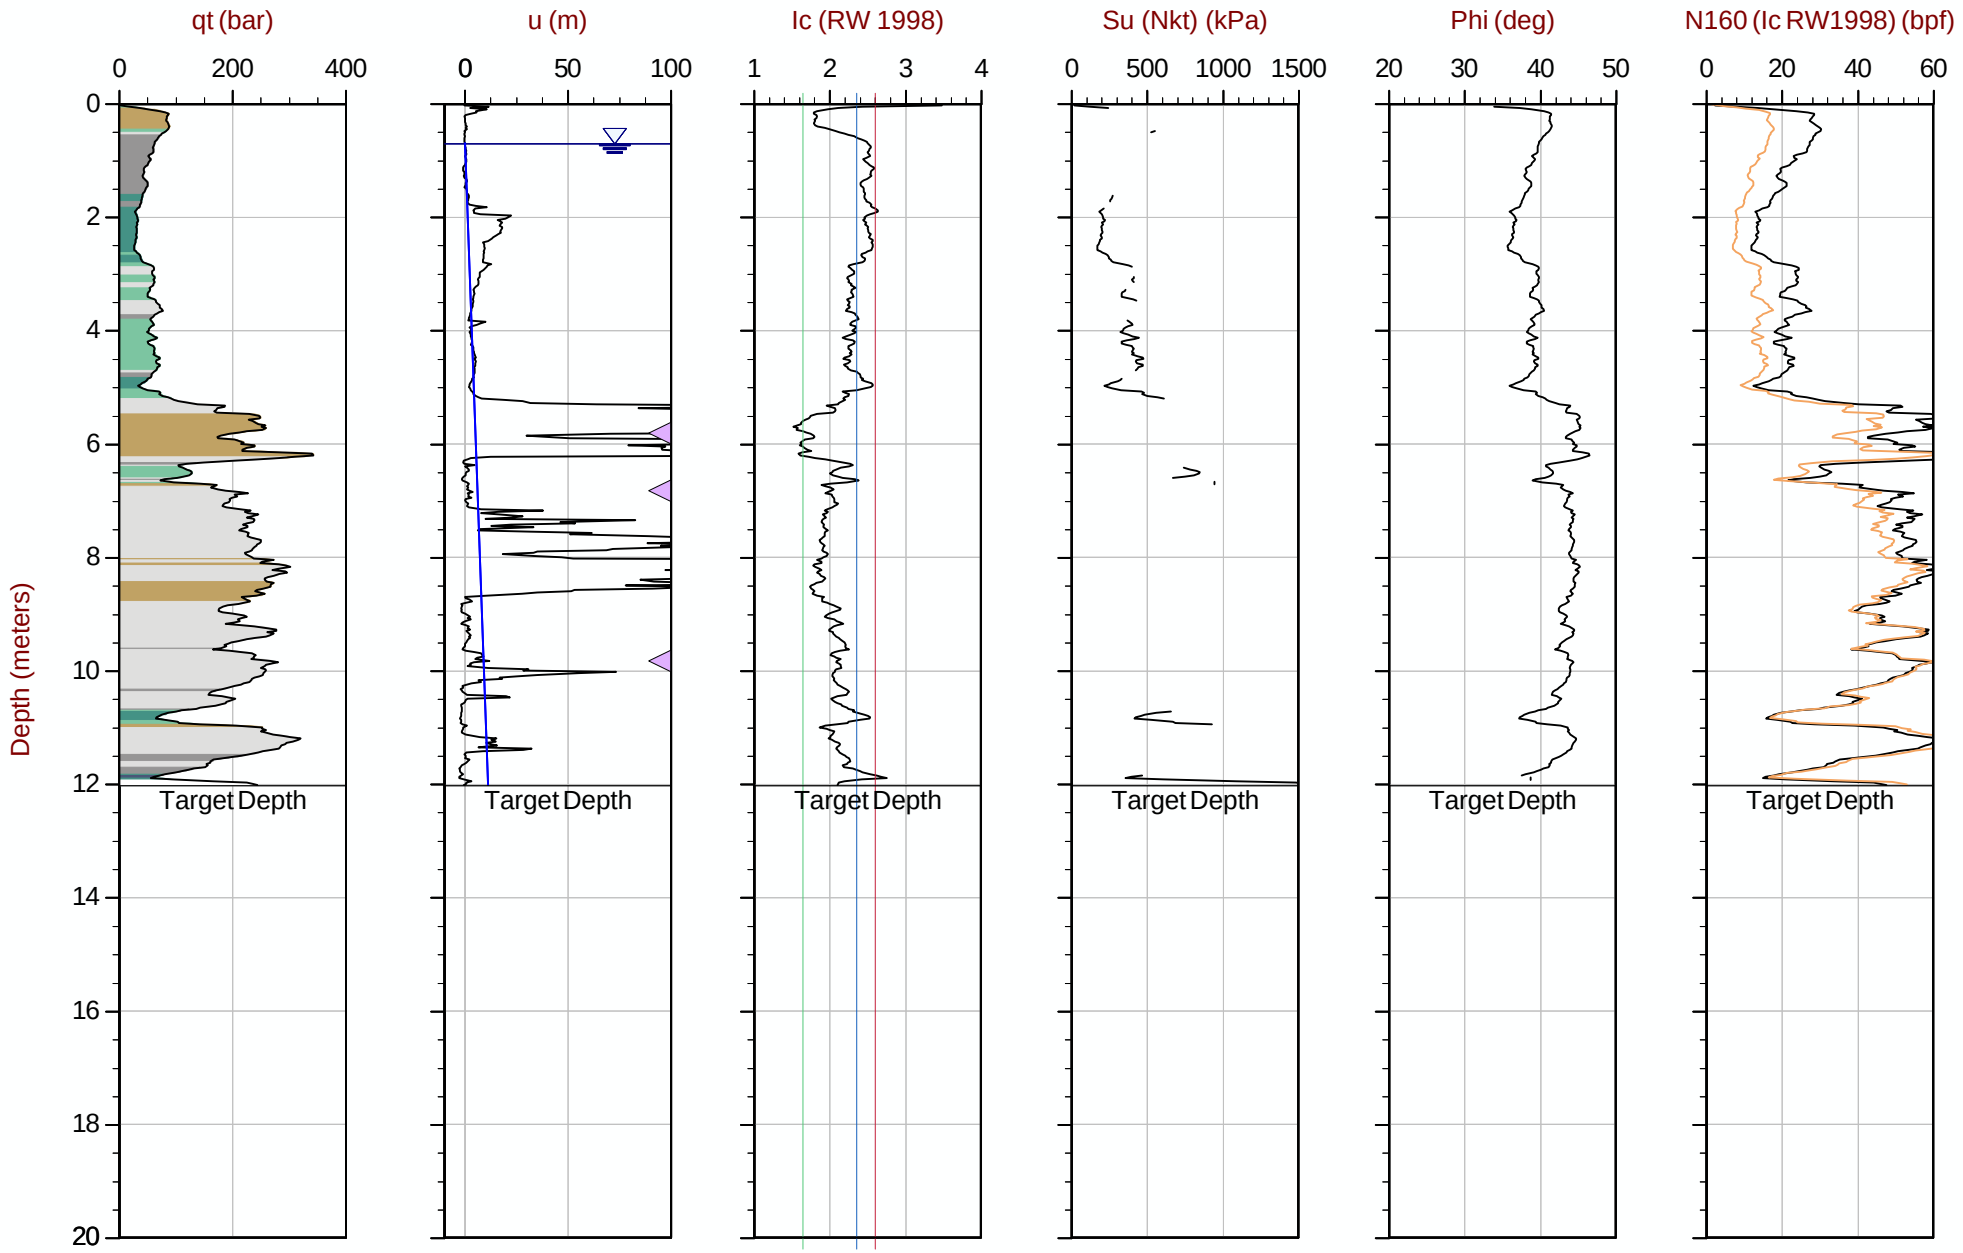

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT252.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609909m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 07:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT253
Cone: 854:T1500F15U35 Area= 15cm2

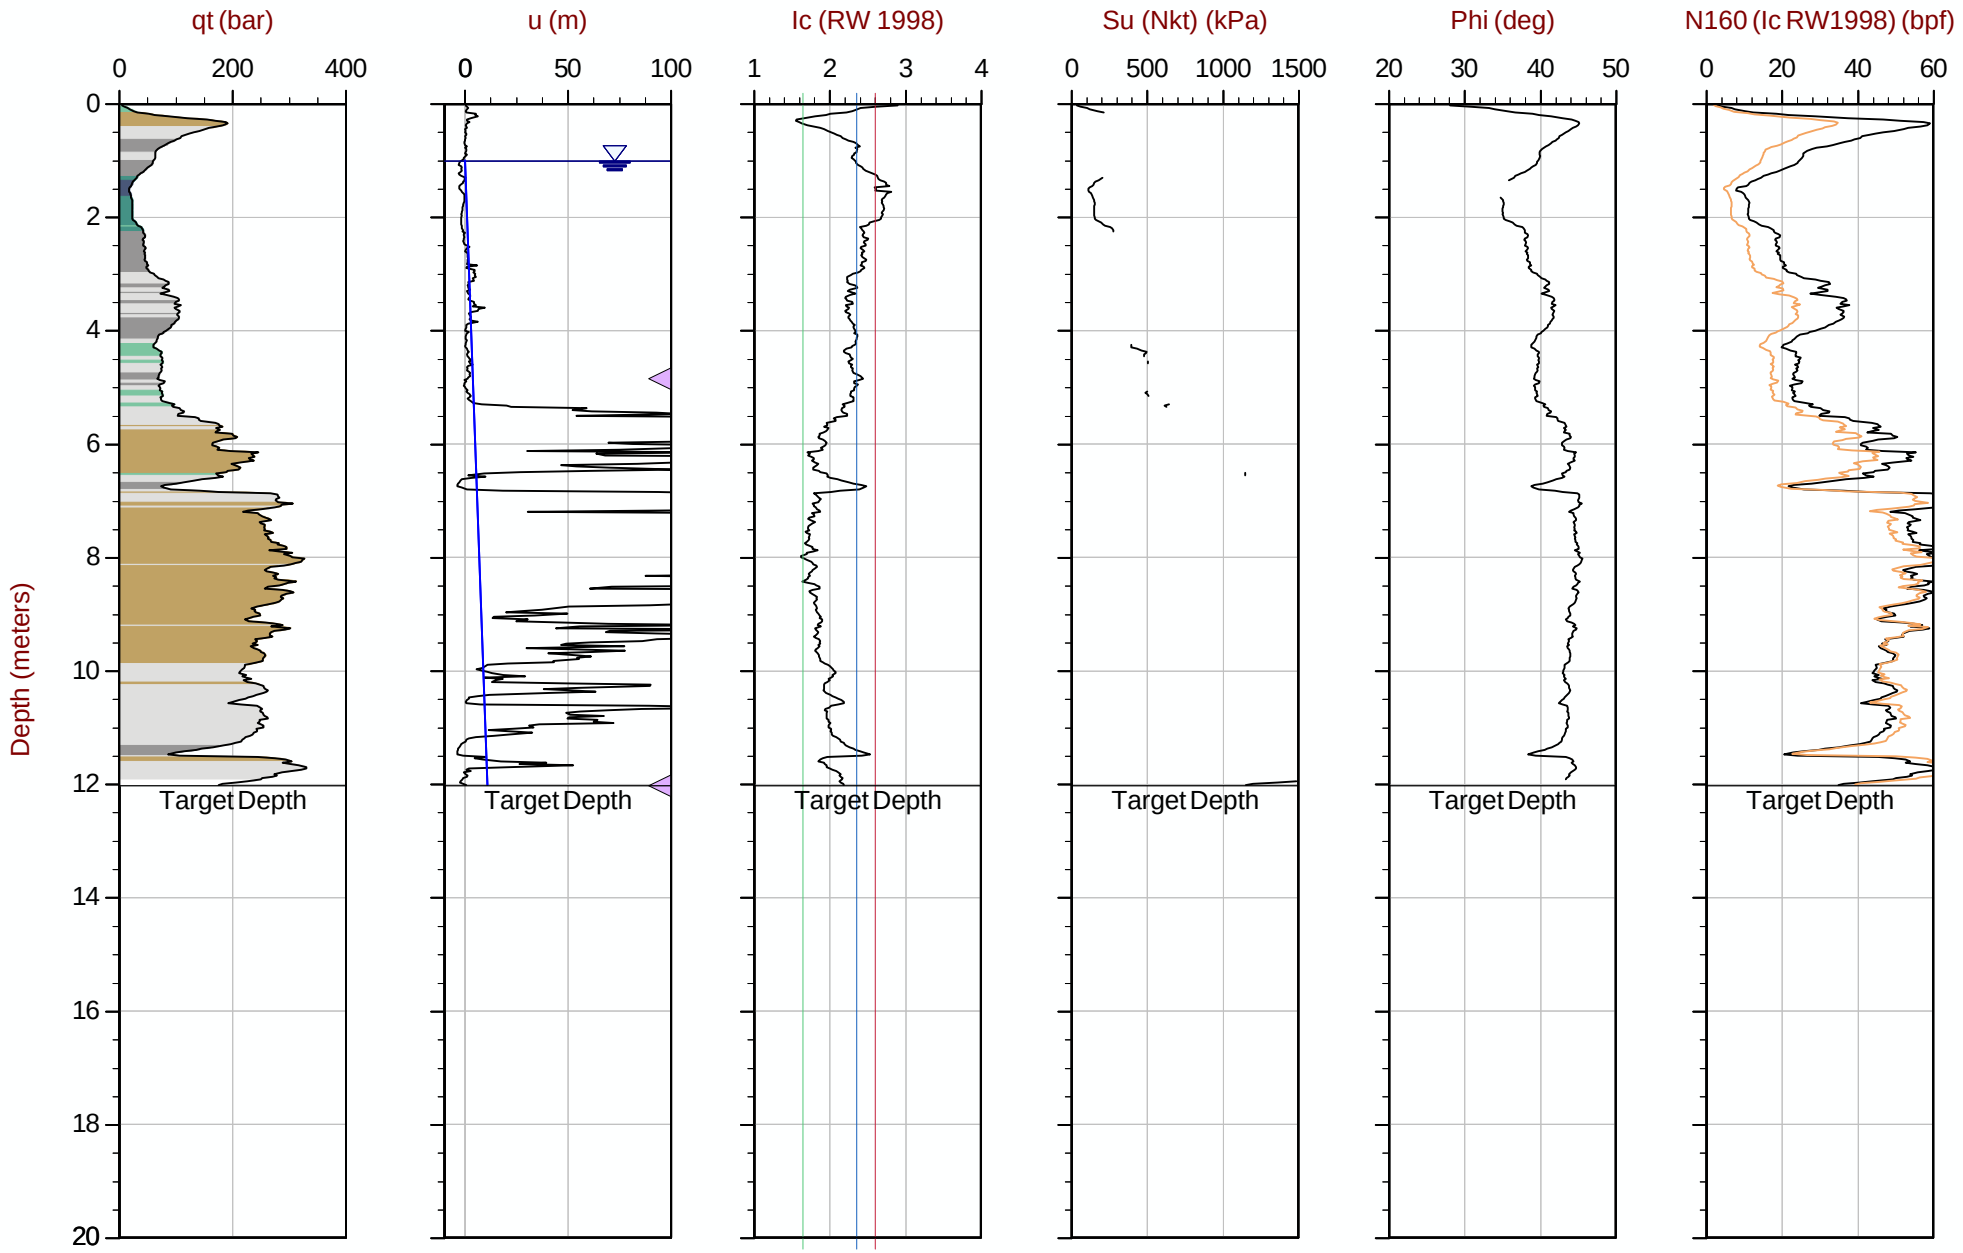

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22_22CPT253.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609860m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 11:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT254
Cone: 854:T1500F15U35 Area= 15cm2

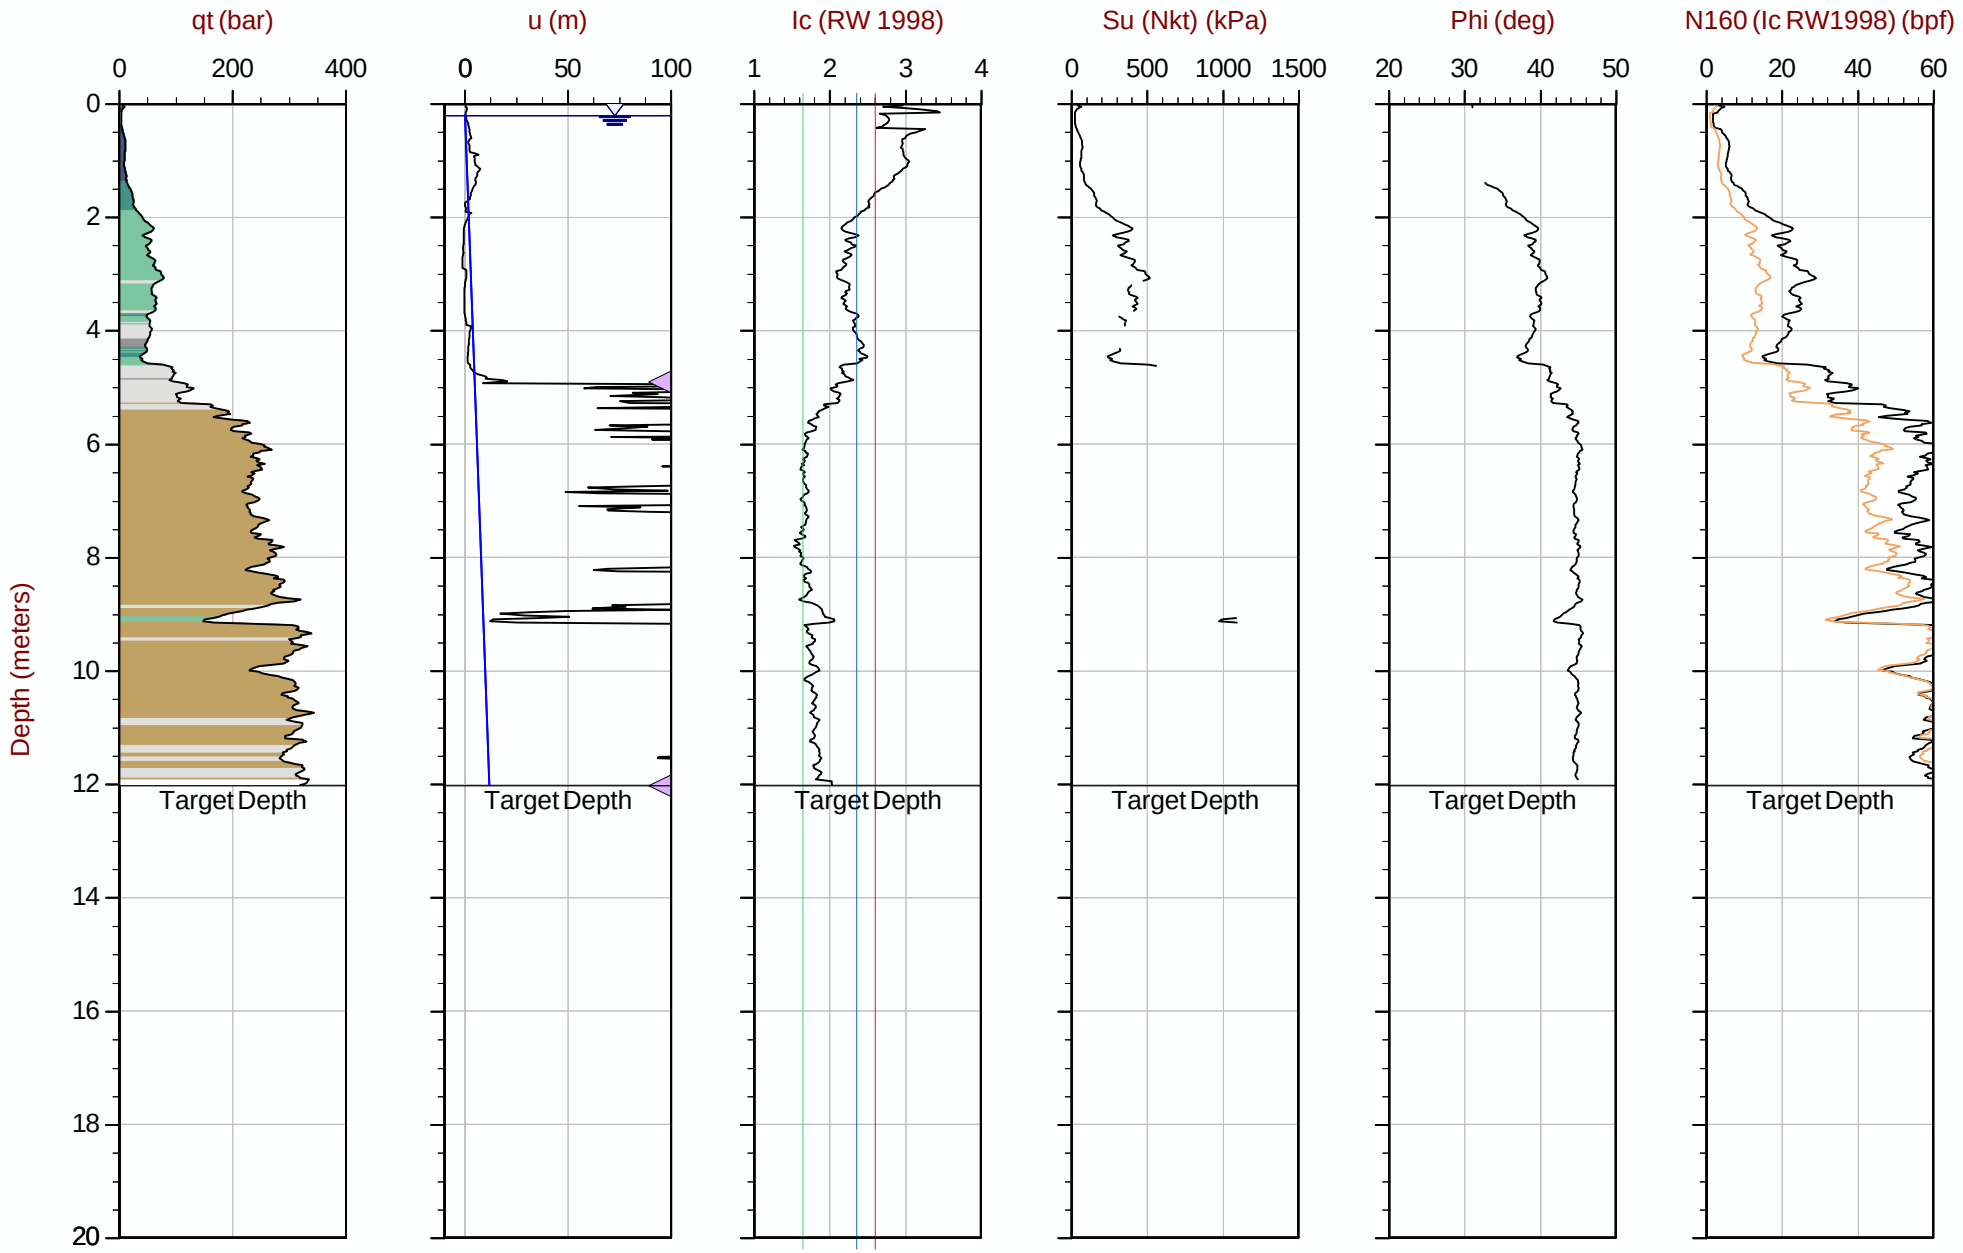

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT254.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609809m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 12:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT255
Cone: 854:T1500F15U35 Area= 15cm2

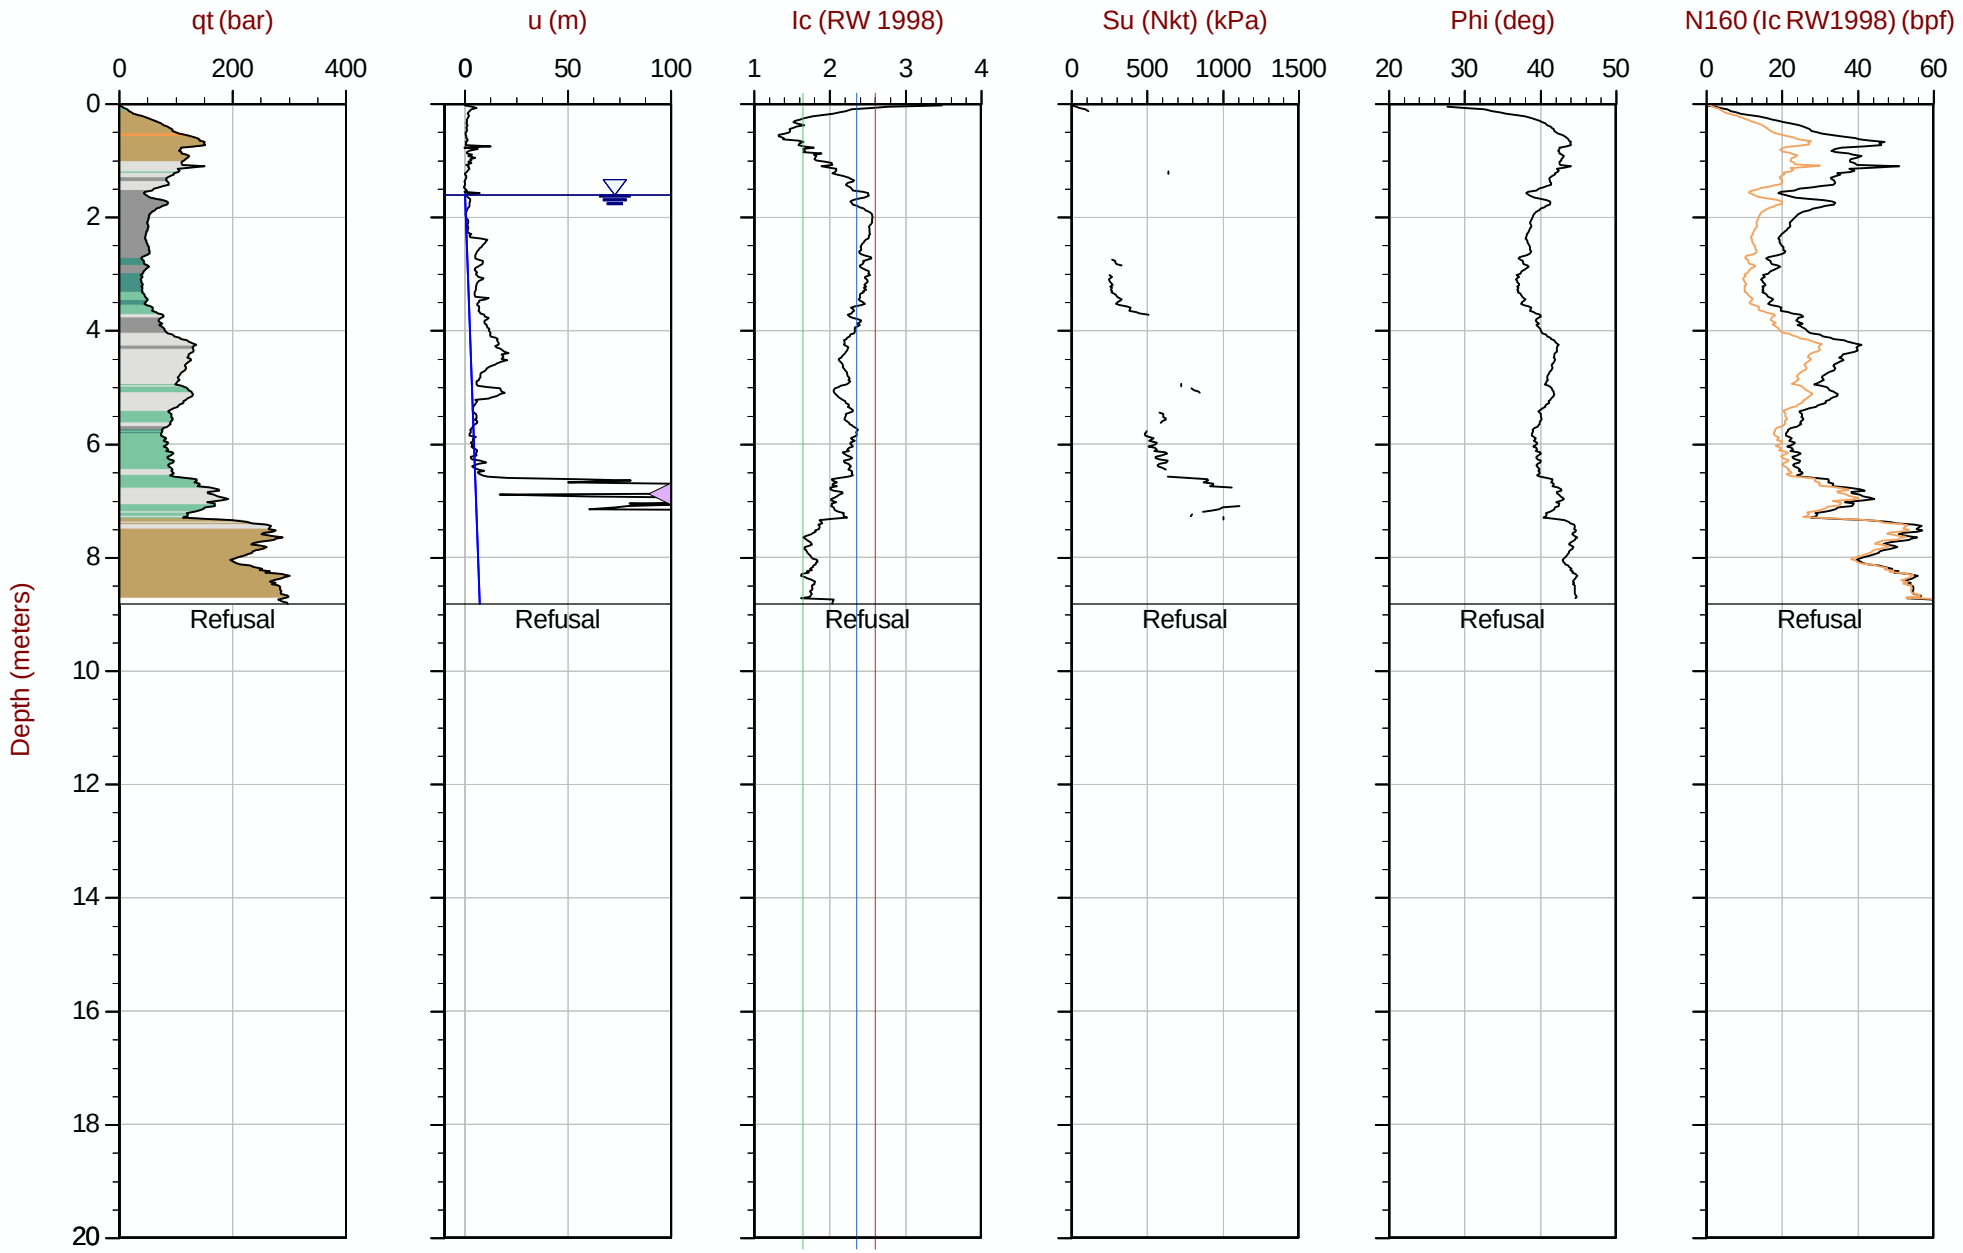

Max Depth: 8.825 m / 28.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT255.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609731m E: 416835m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 13:54
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT256
Cone: 854:T1500F15U35 Area= 15cm2

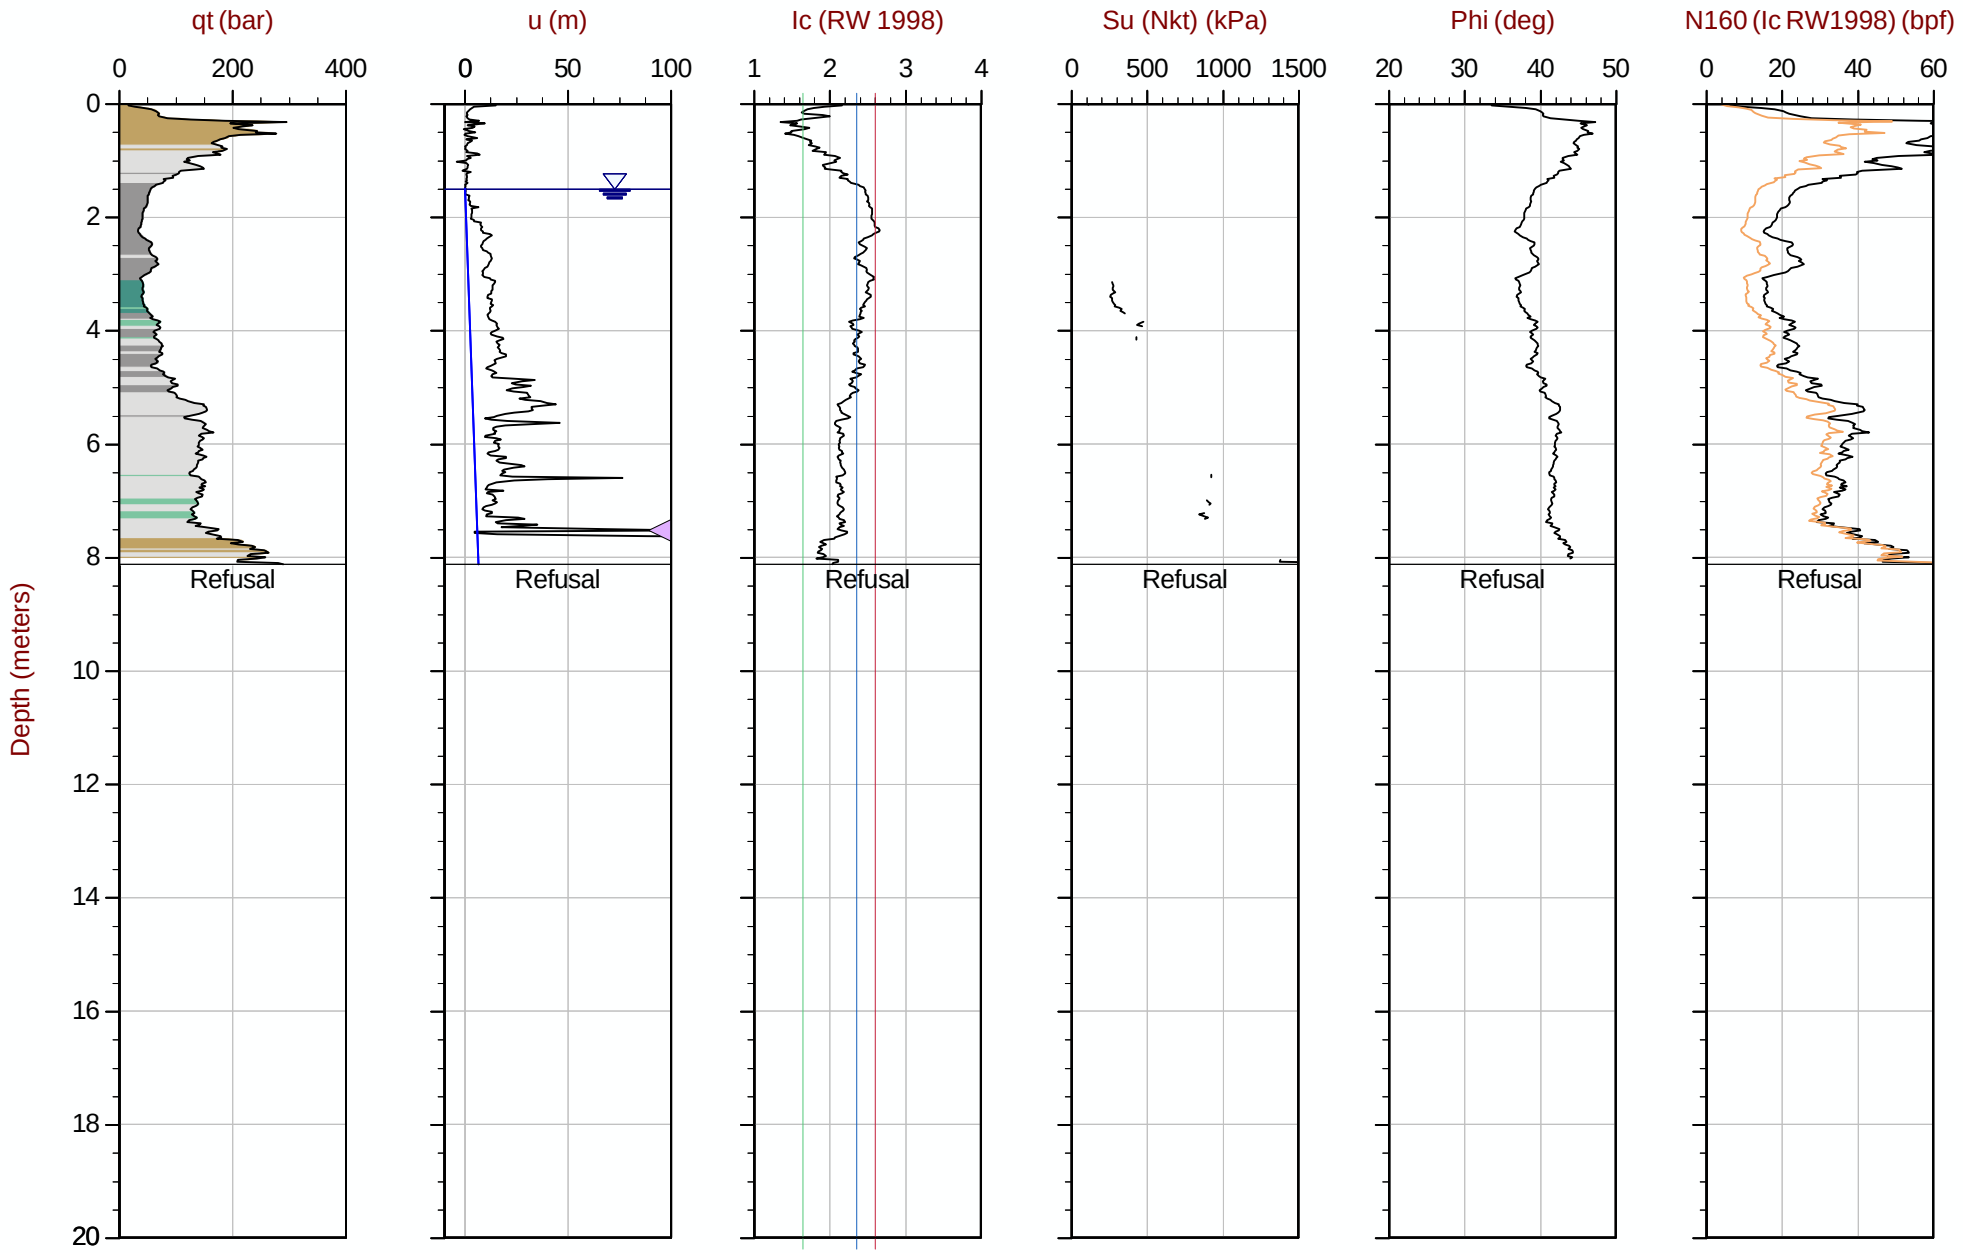

Max Depth: 8.125 m / 26.66 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT256.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609681m E: 416828m Elev: 768.534m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 15:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT257
Cone: 854:T1500F15U35 Area= 15cm2

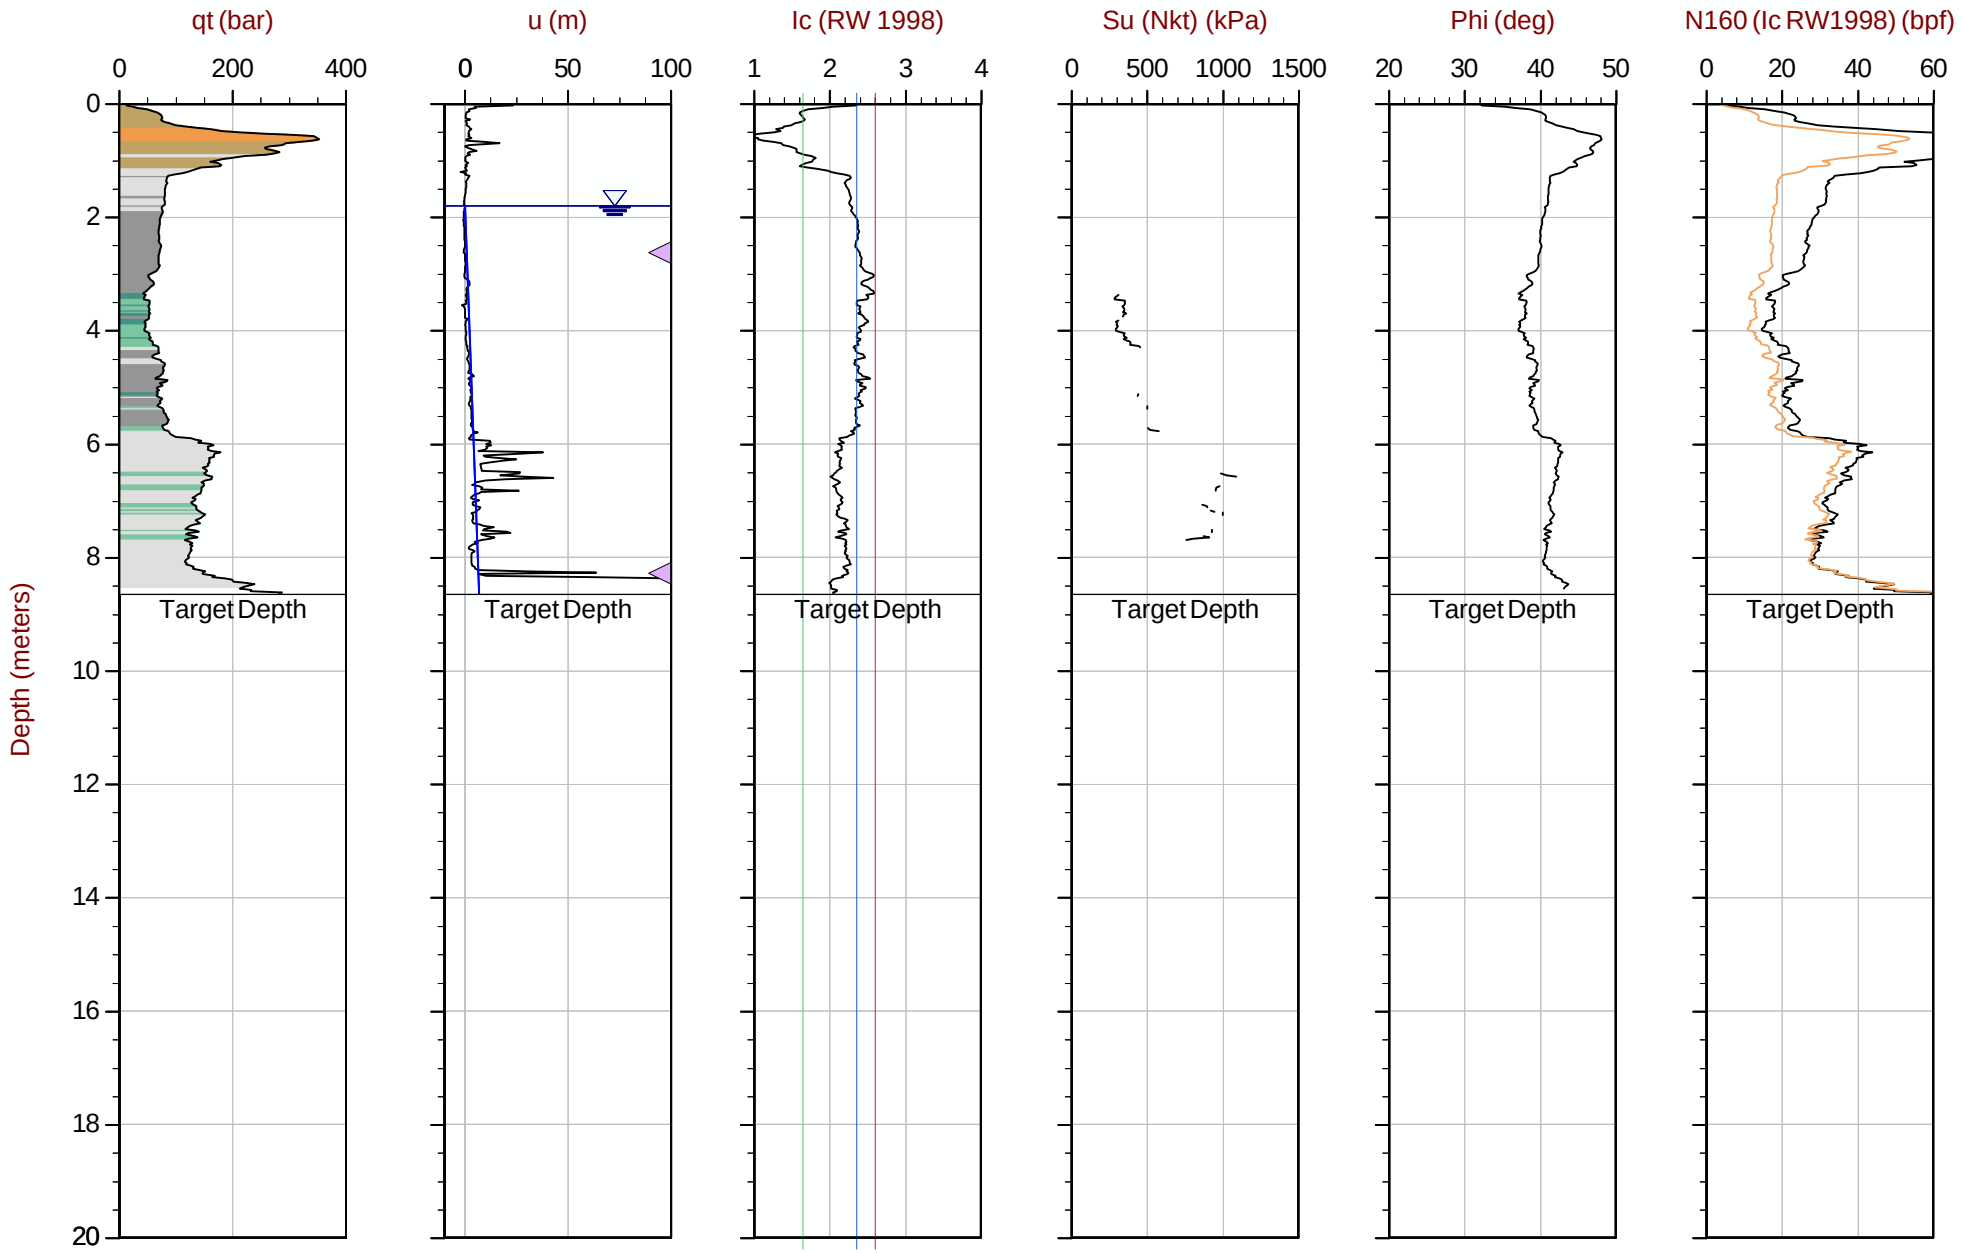

Max Depth: 8.650 m / 28.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT257.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609637m E: 416810m Elev: 768.293m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 16:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT258
Cone: 854:T1500F15U35 Area= 15cm2

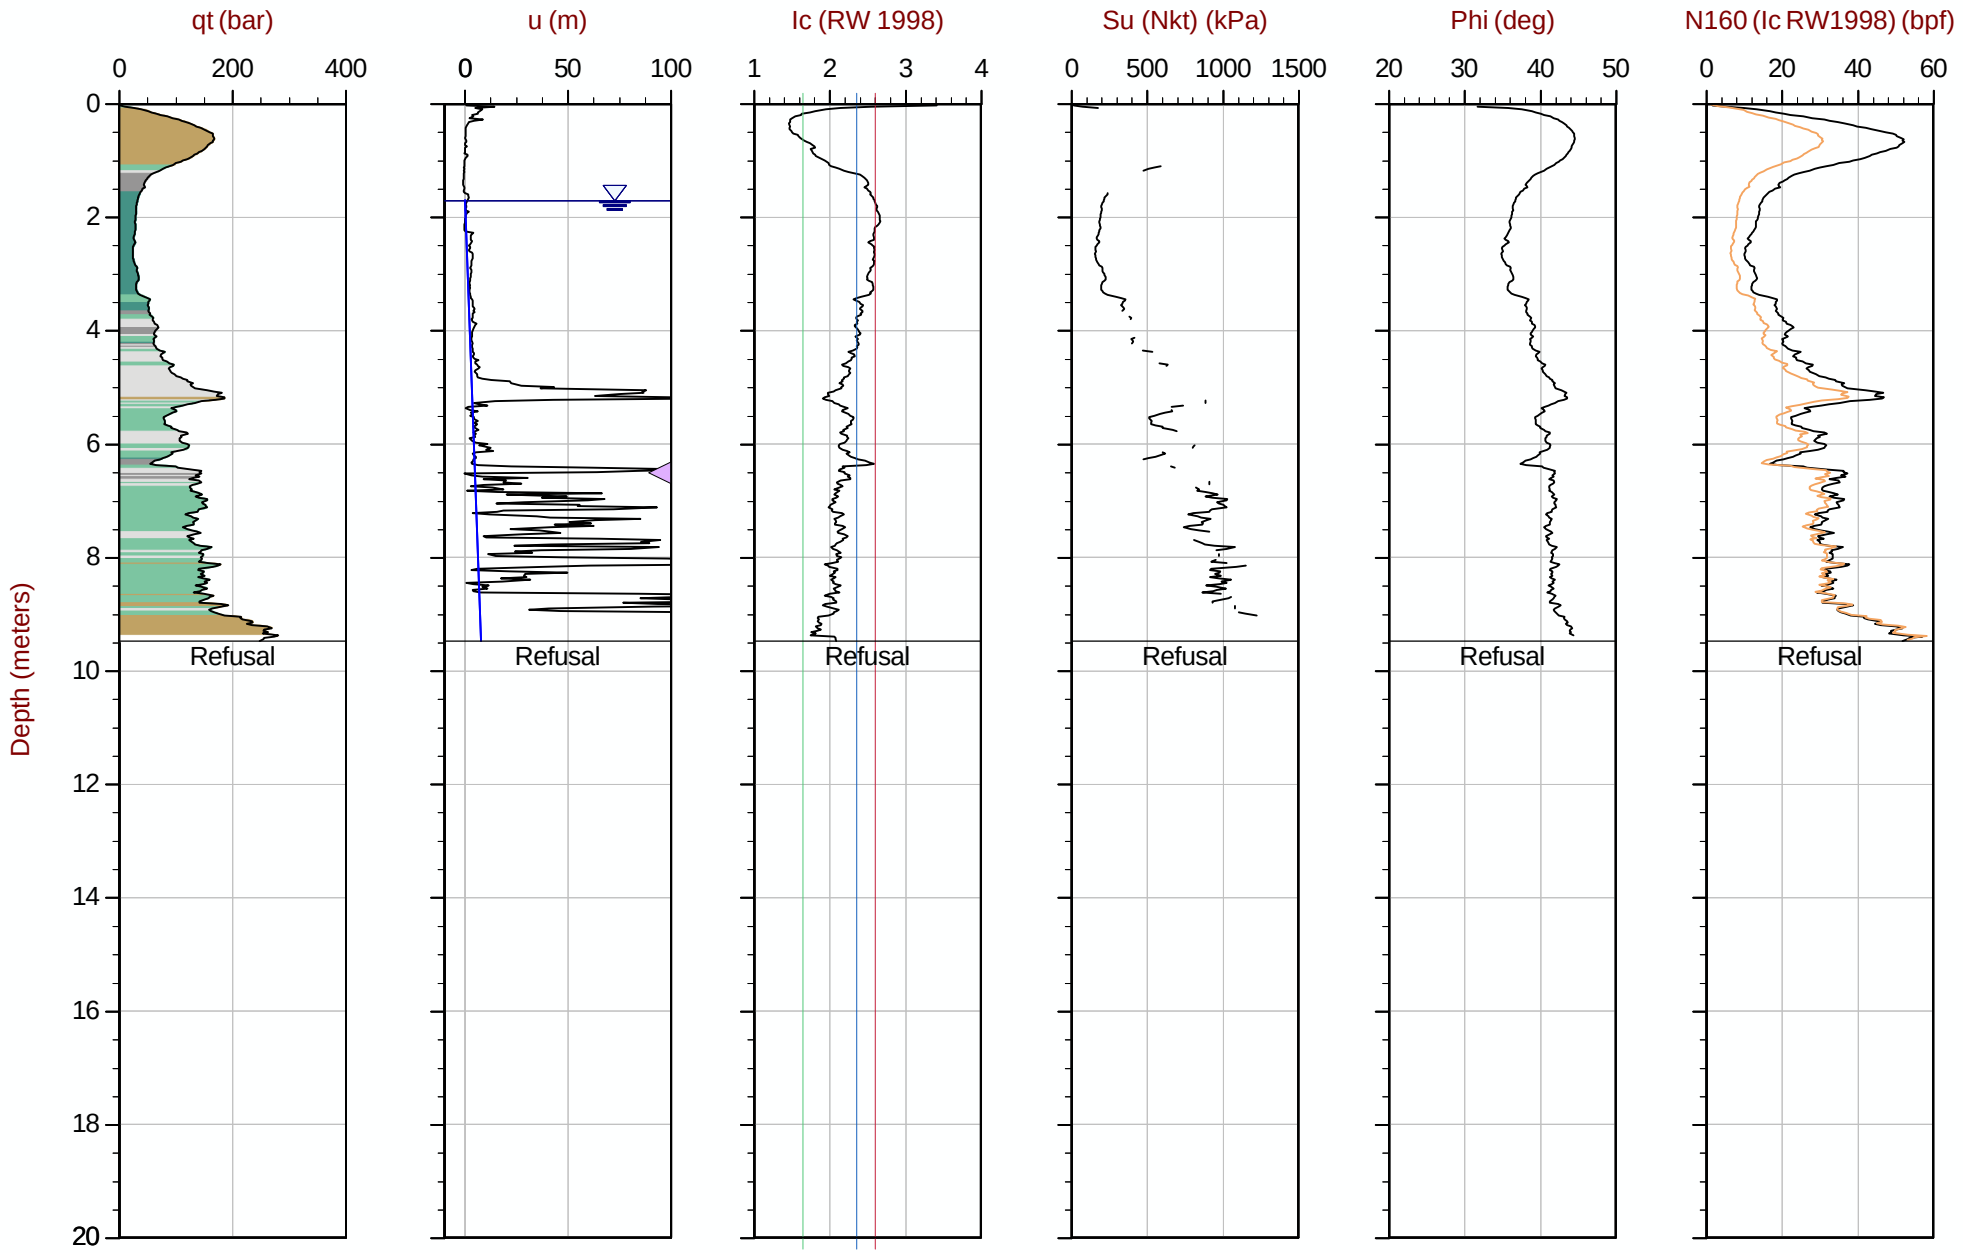

Max Depth: 9.475 m / 31.09 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT258.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609596m E: 416785m Elev: 768.056m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 14:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT259
Cone: 854:T1500F15U35 Area= 15cm2

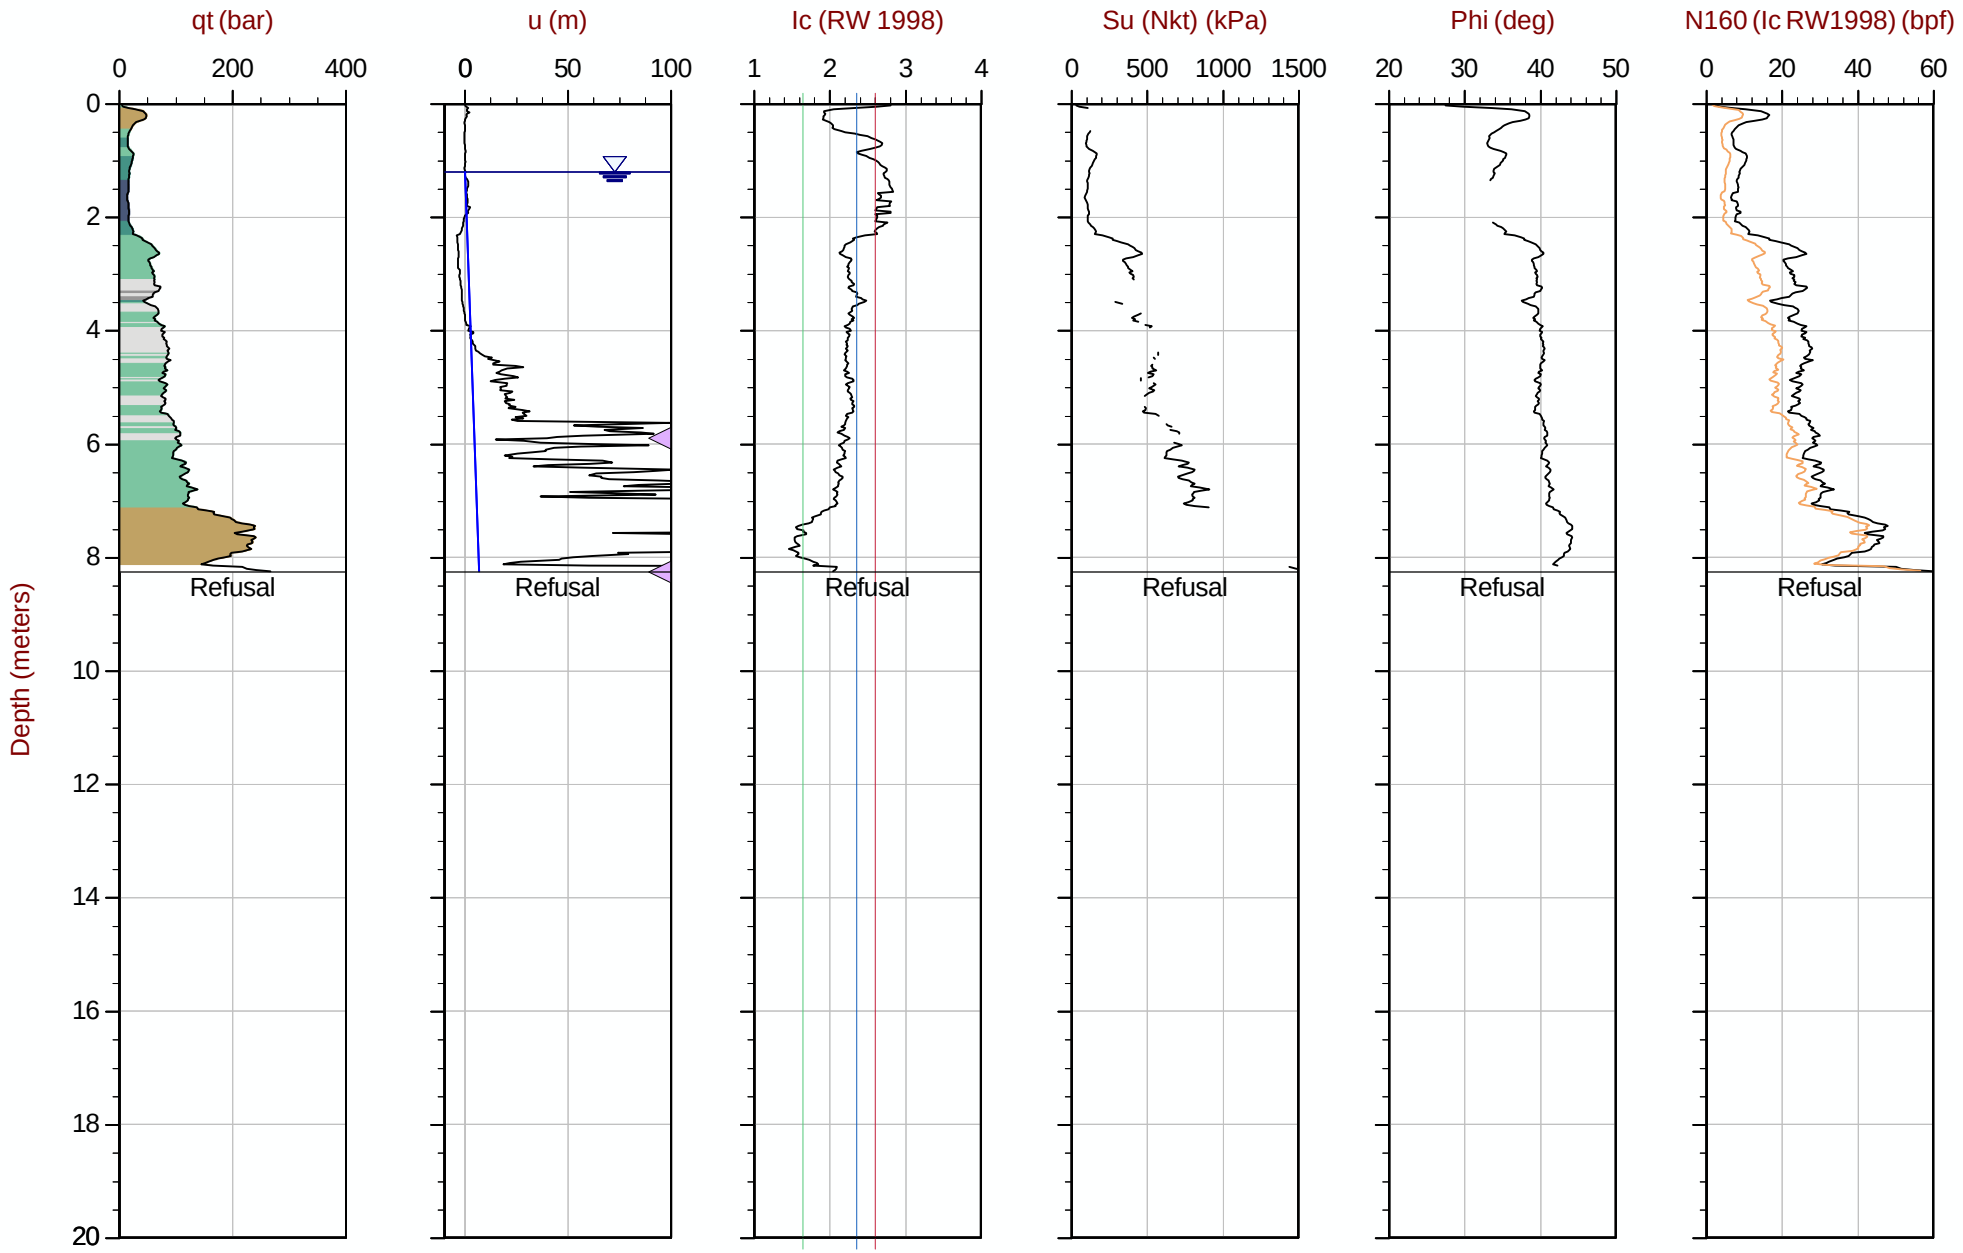

Max Depth: 8.250 m / 27.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT259.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612543m E: 416724m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 17:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT260
Cone: 854:T1500F15U35 Area= 15cm2

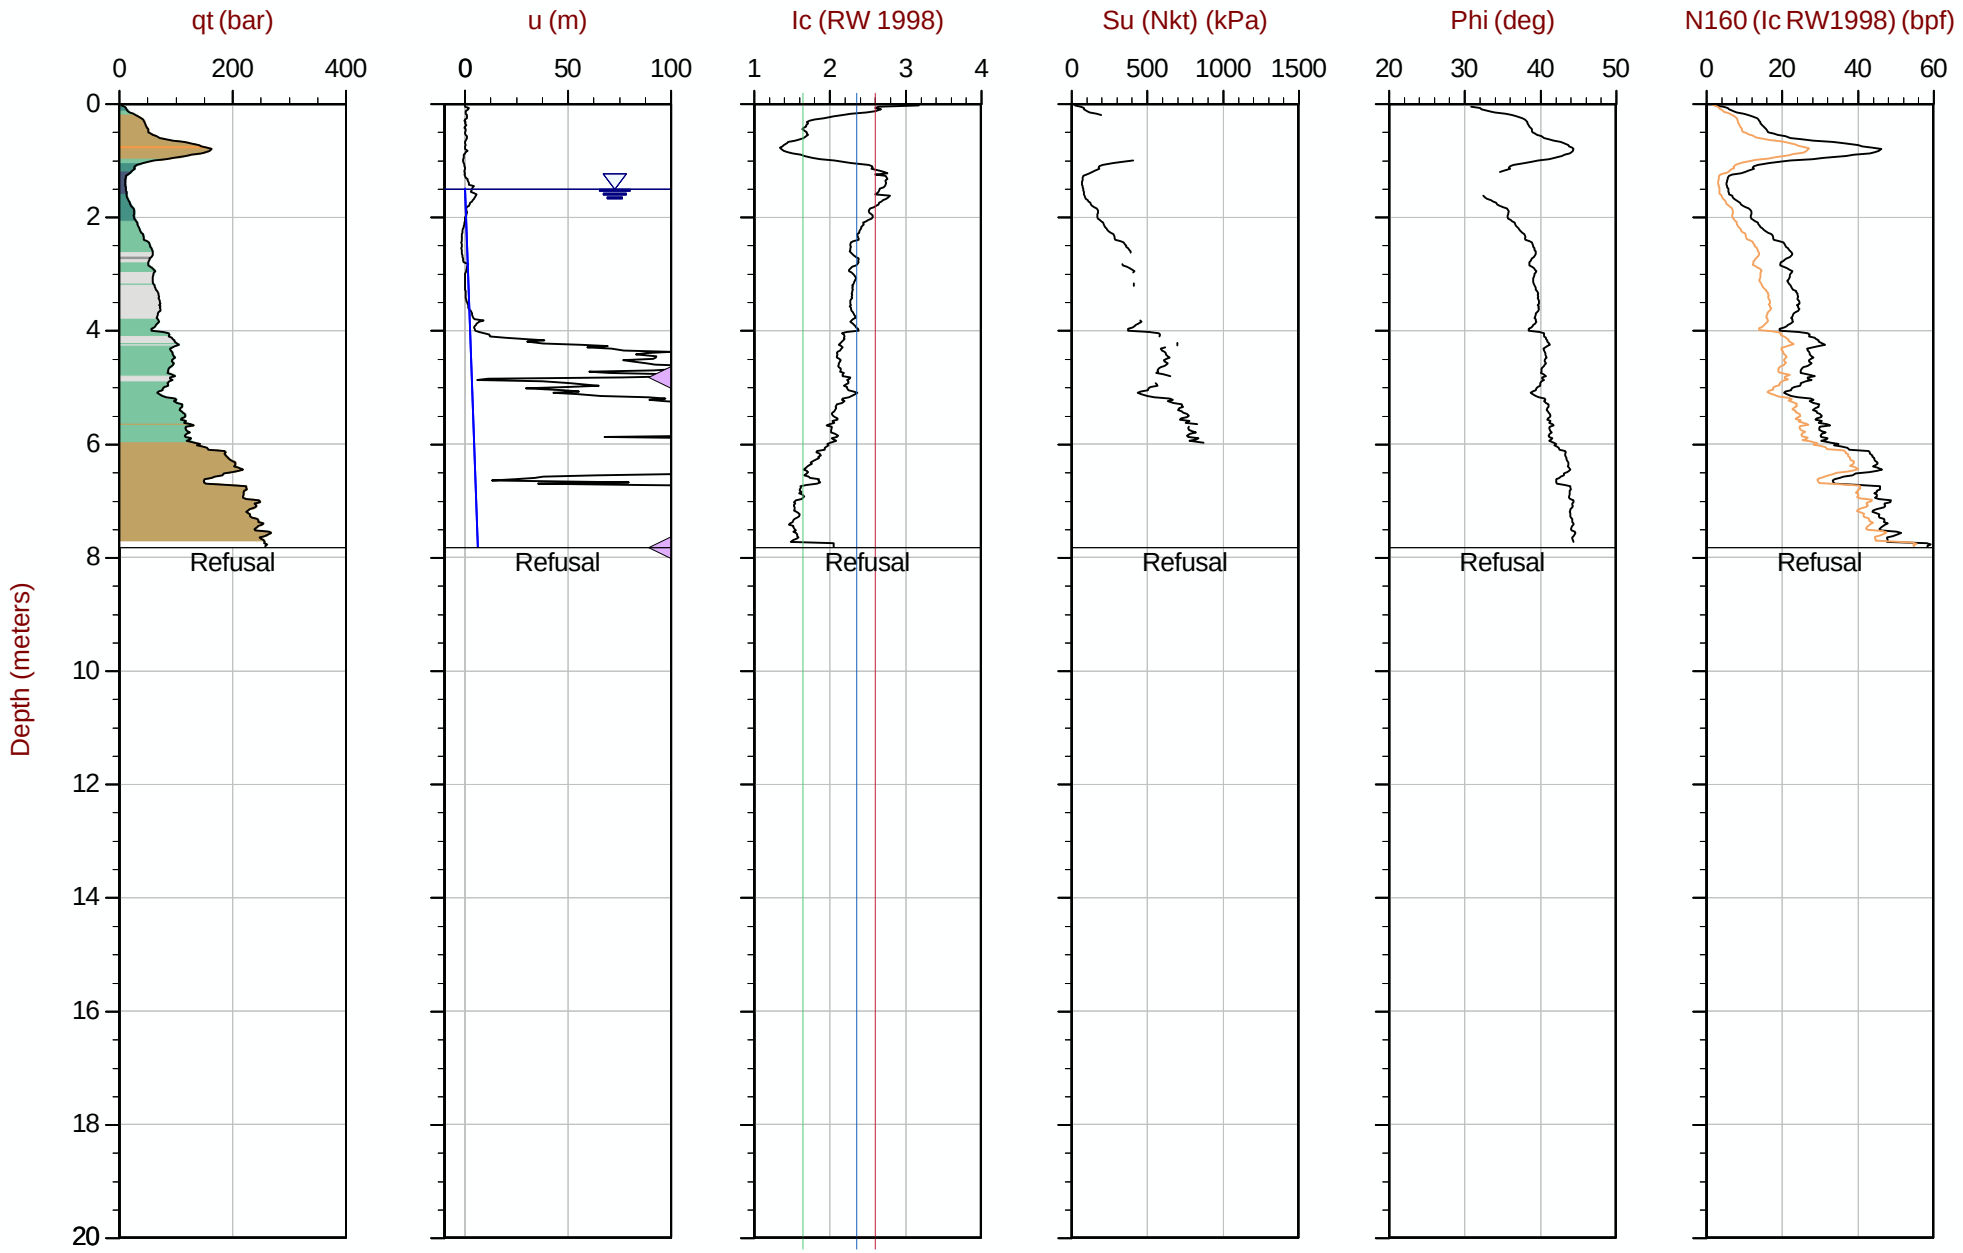

Max Depth: 7.825 m / 25.67 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT260.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612481m E: 416823m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 13:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT261
Cone: 821:T1000F10U35 Area= 15cm2

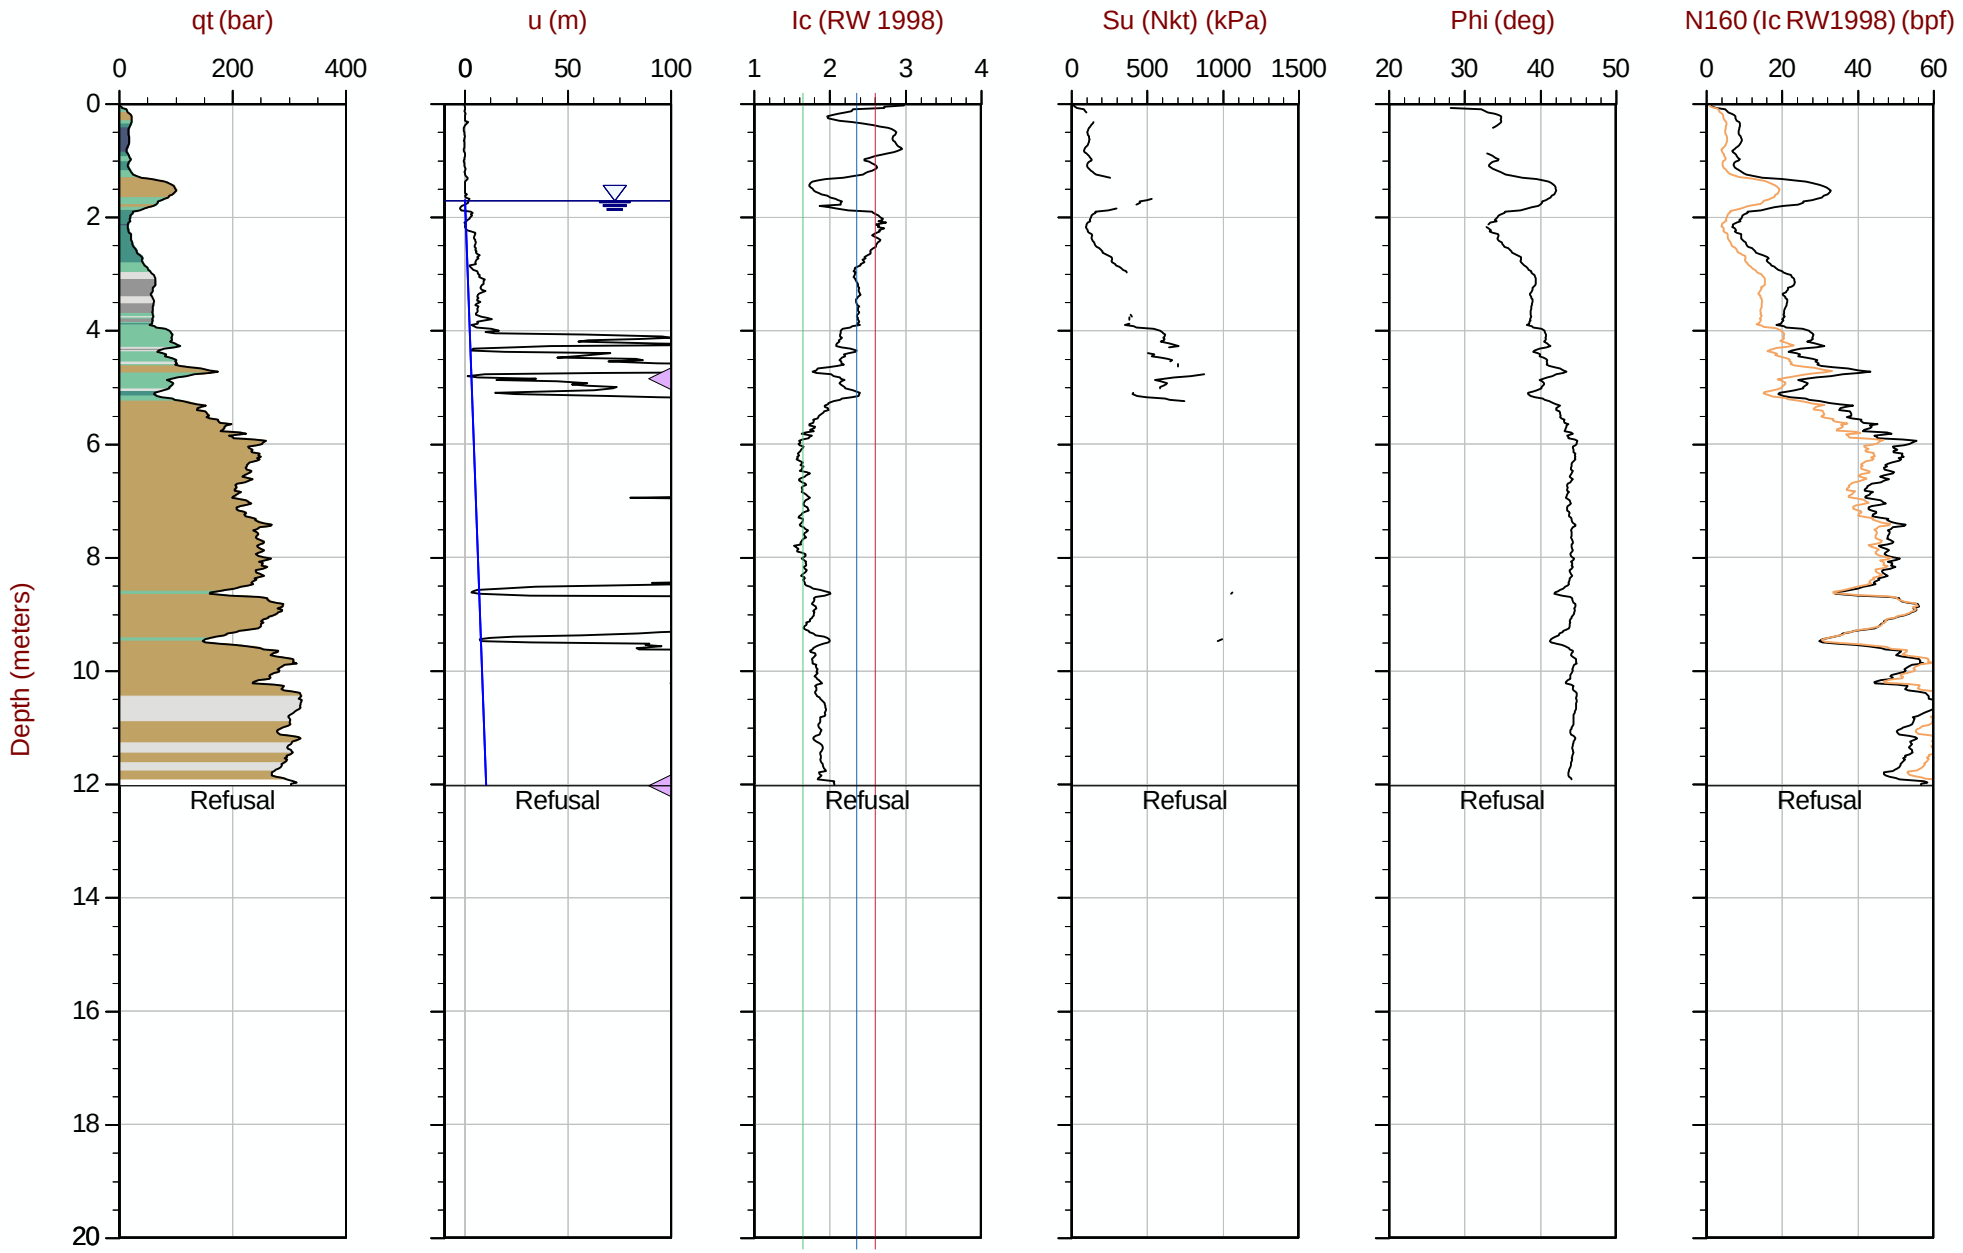

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT261.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612389m E: 416896m Elev: 767.458m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 12:35
Site: Brooks, Alberta

Sounding: RCPT22-22CPT262
Cone: 821:T1000F10U35 Area= 15cm2

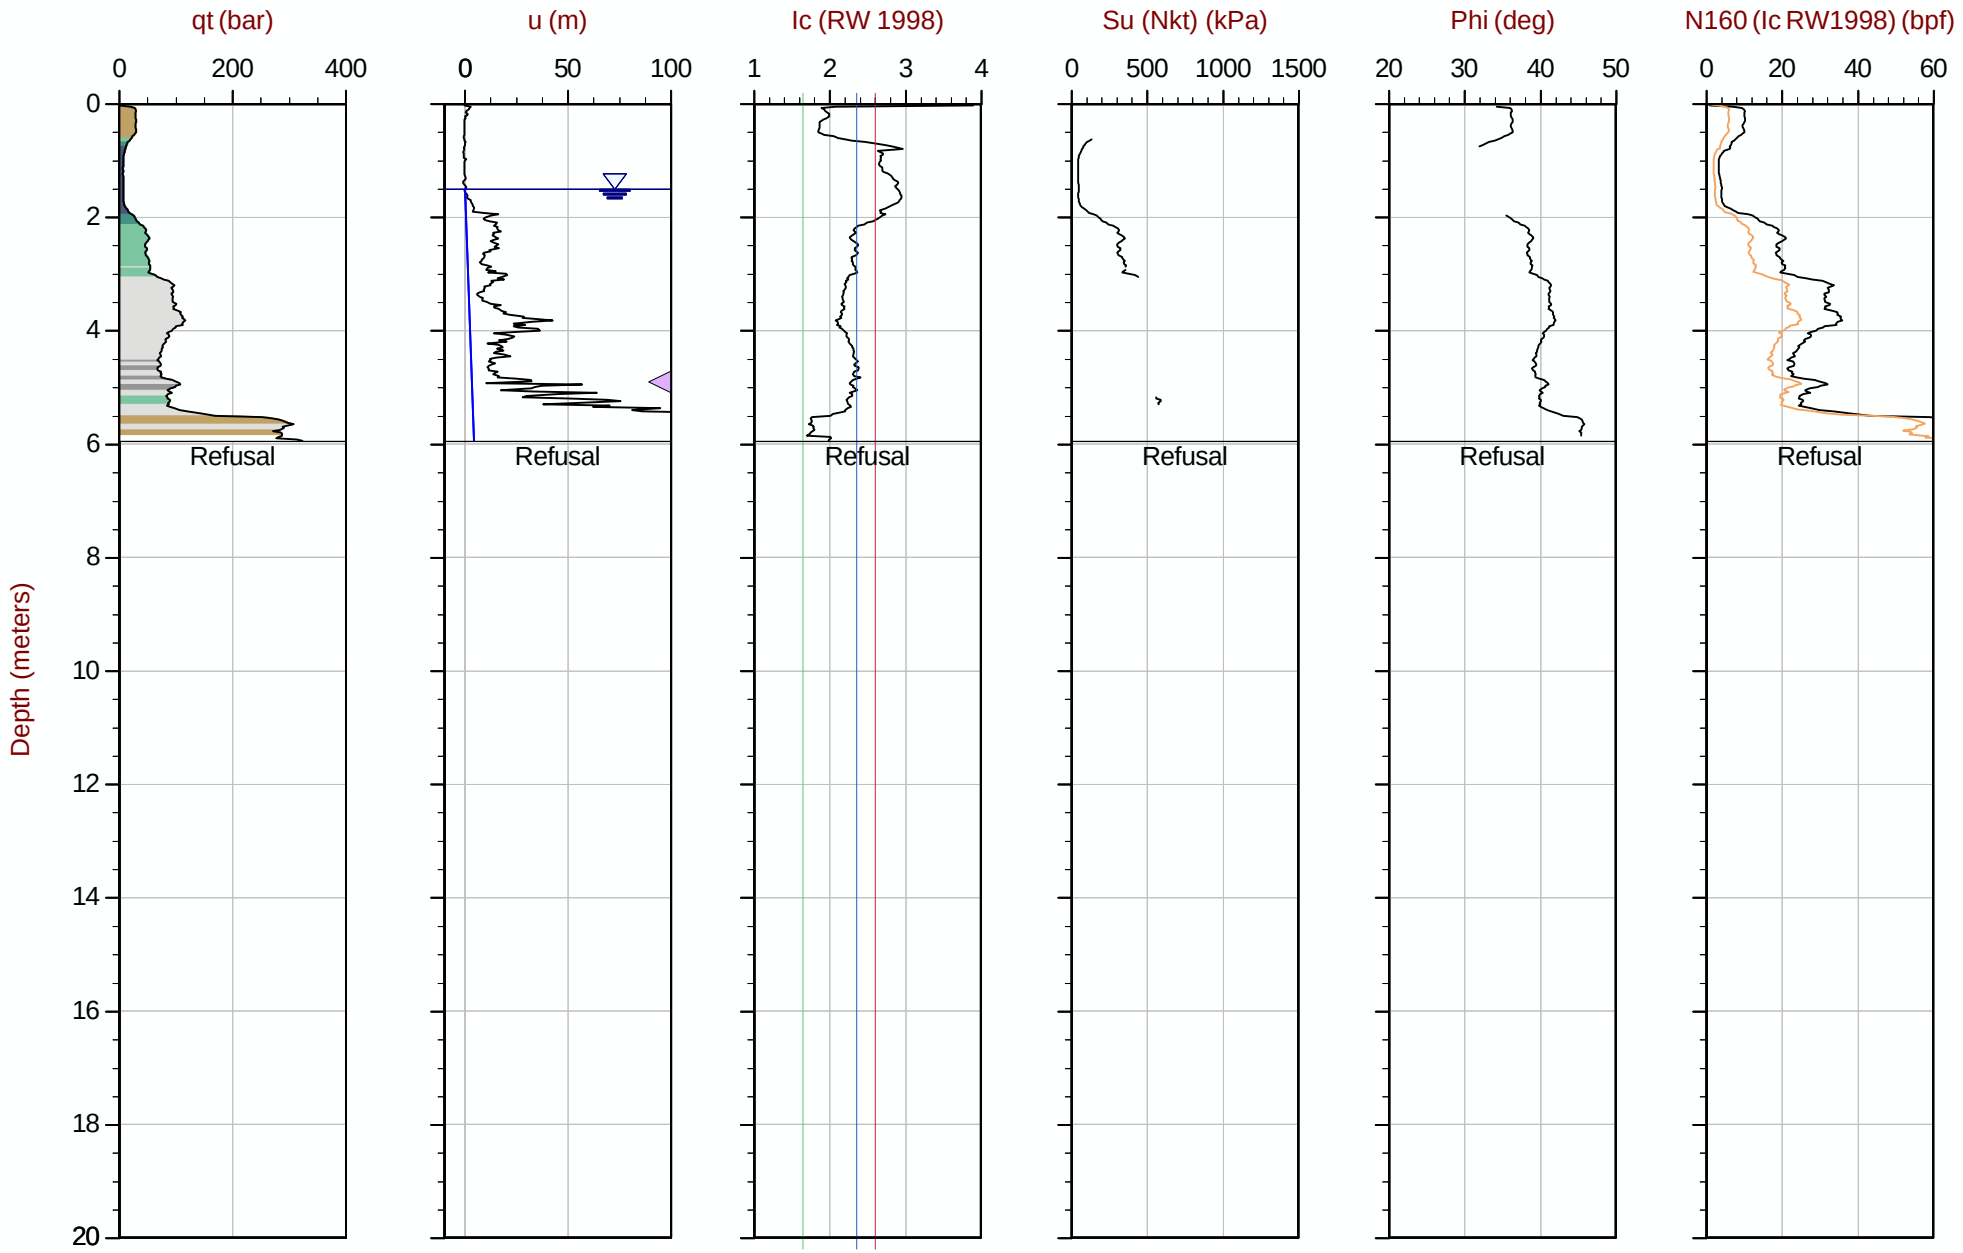

Max Depth: 5.950 m / 19.52 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT262.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612278m E: 416934m Elev: 767.455m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 11:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT263
Cone: 821:T1000F10U35 Area= 15cm2

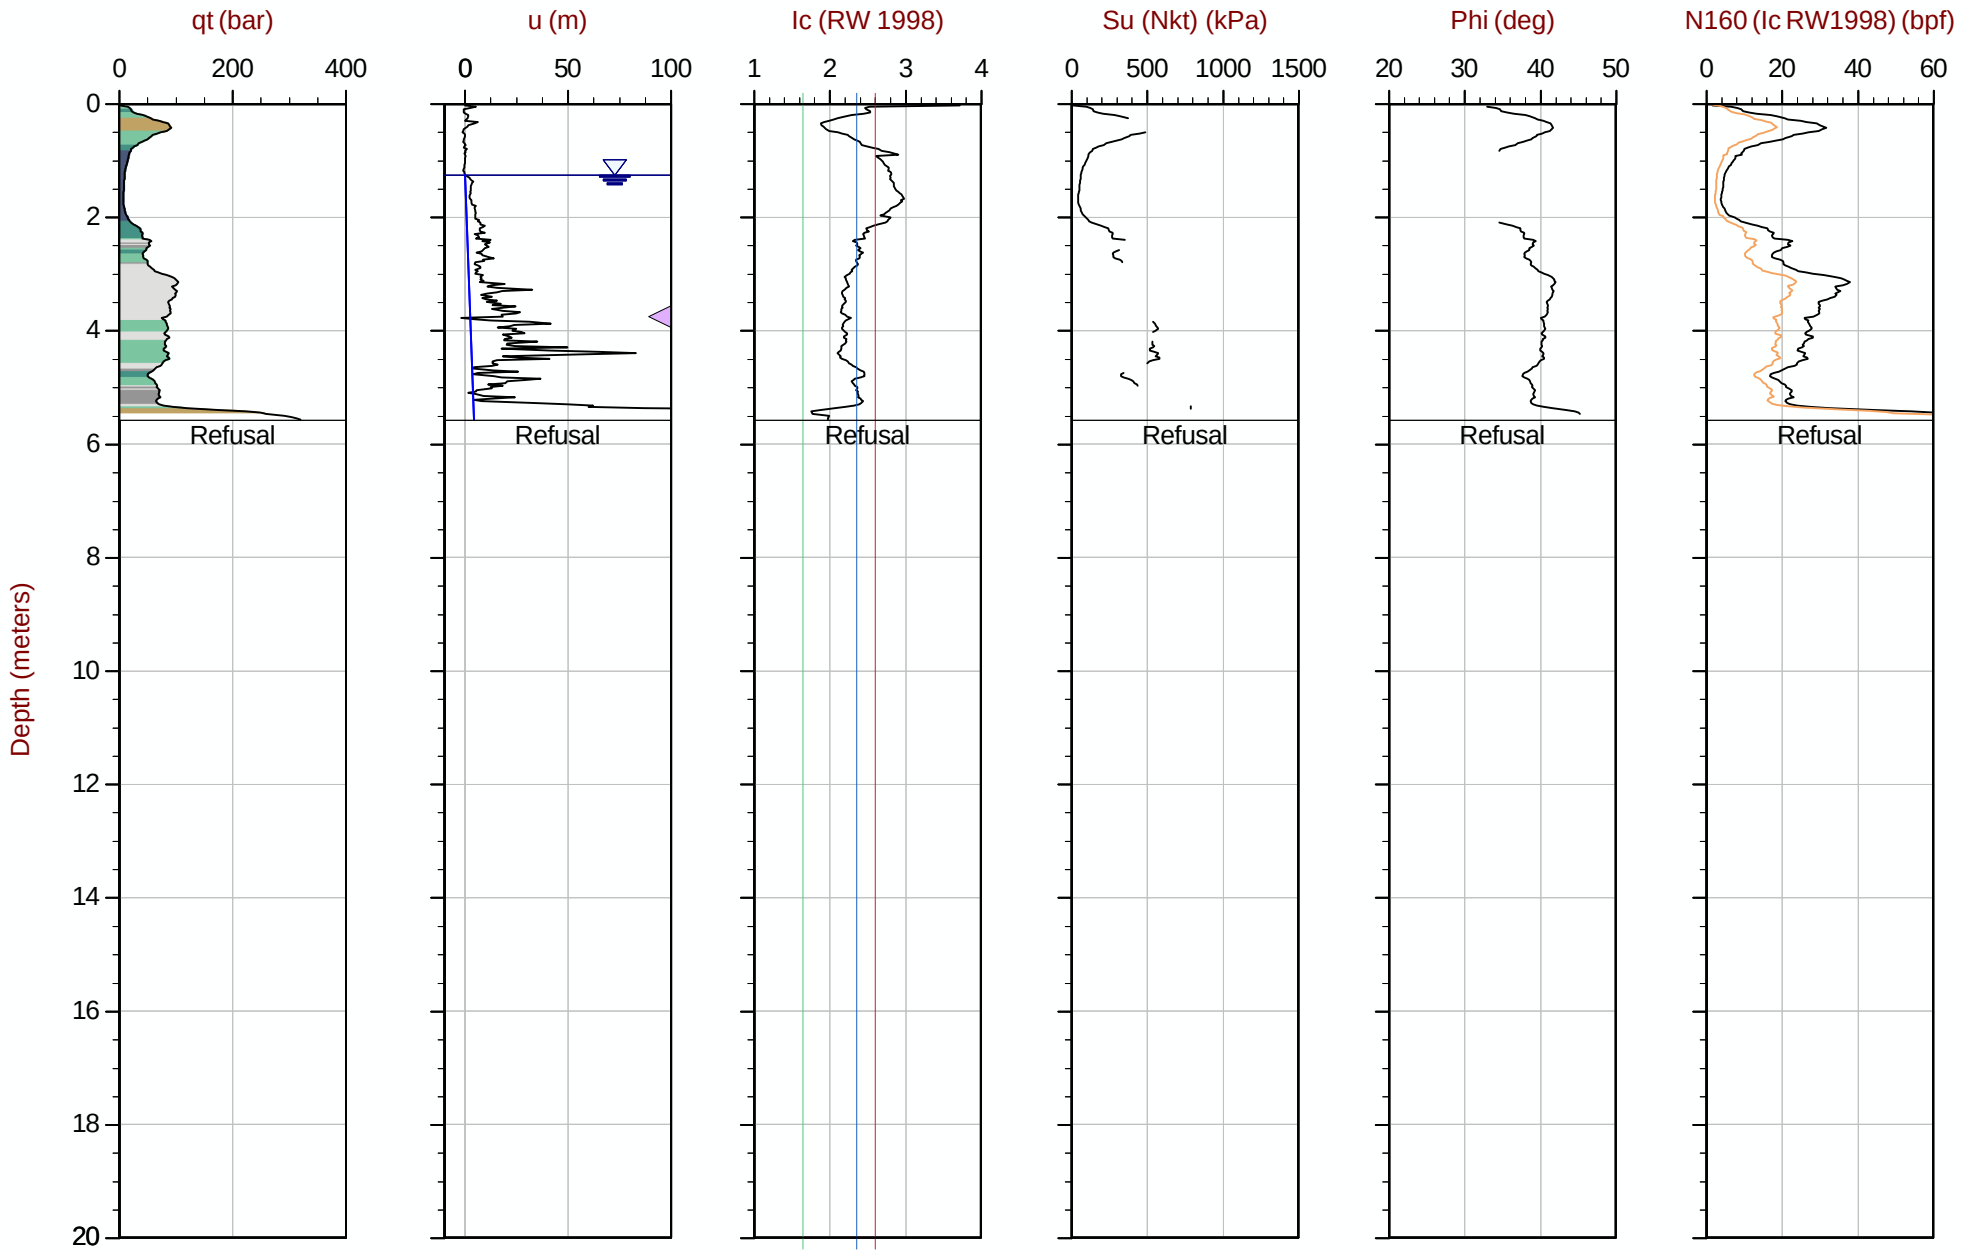

Max Depth: 5.575 m / 18.29 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT263.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612168m E: 416938m Elev: 767.248m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 10:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT264
Cone: 821:T1000F10U35 Area= 15cm2

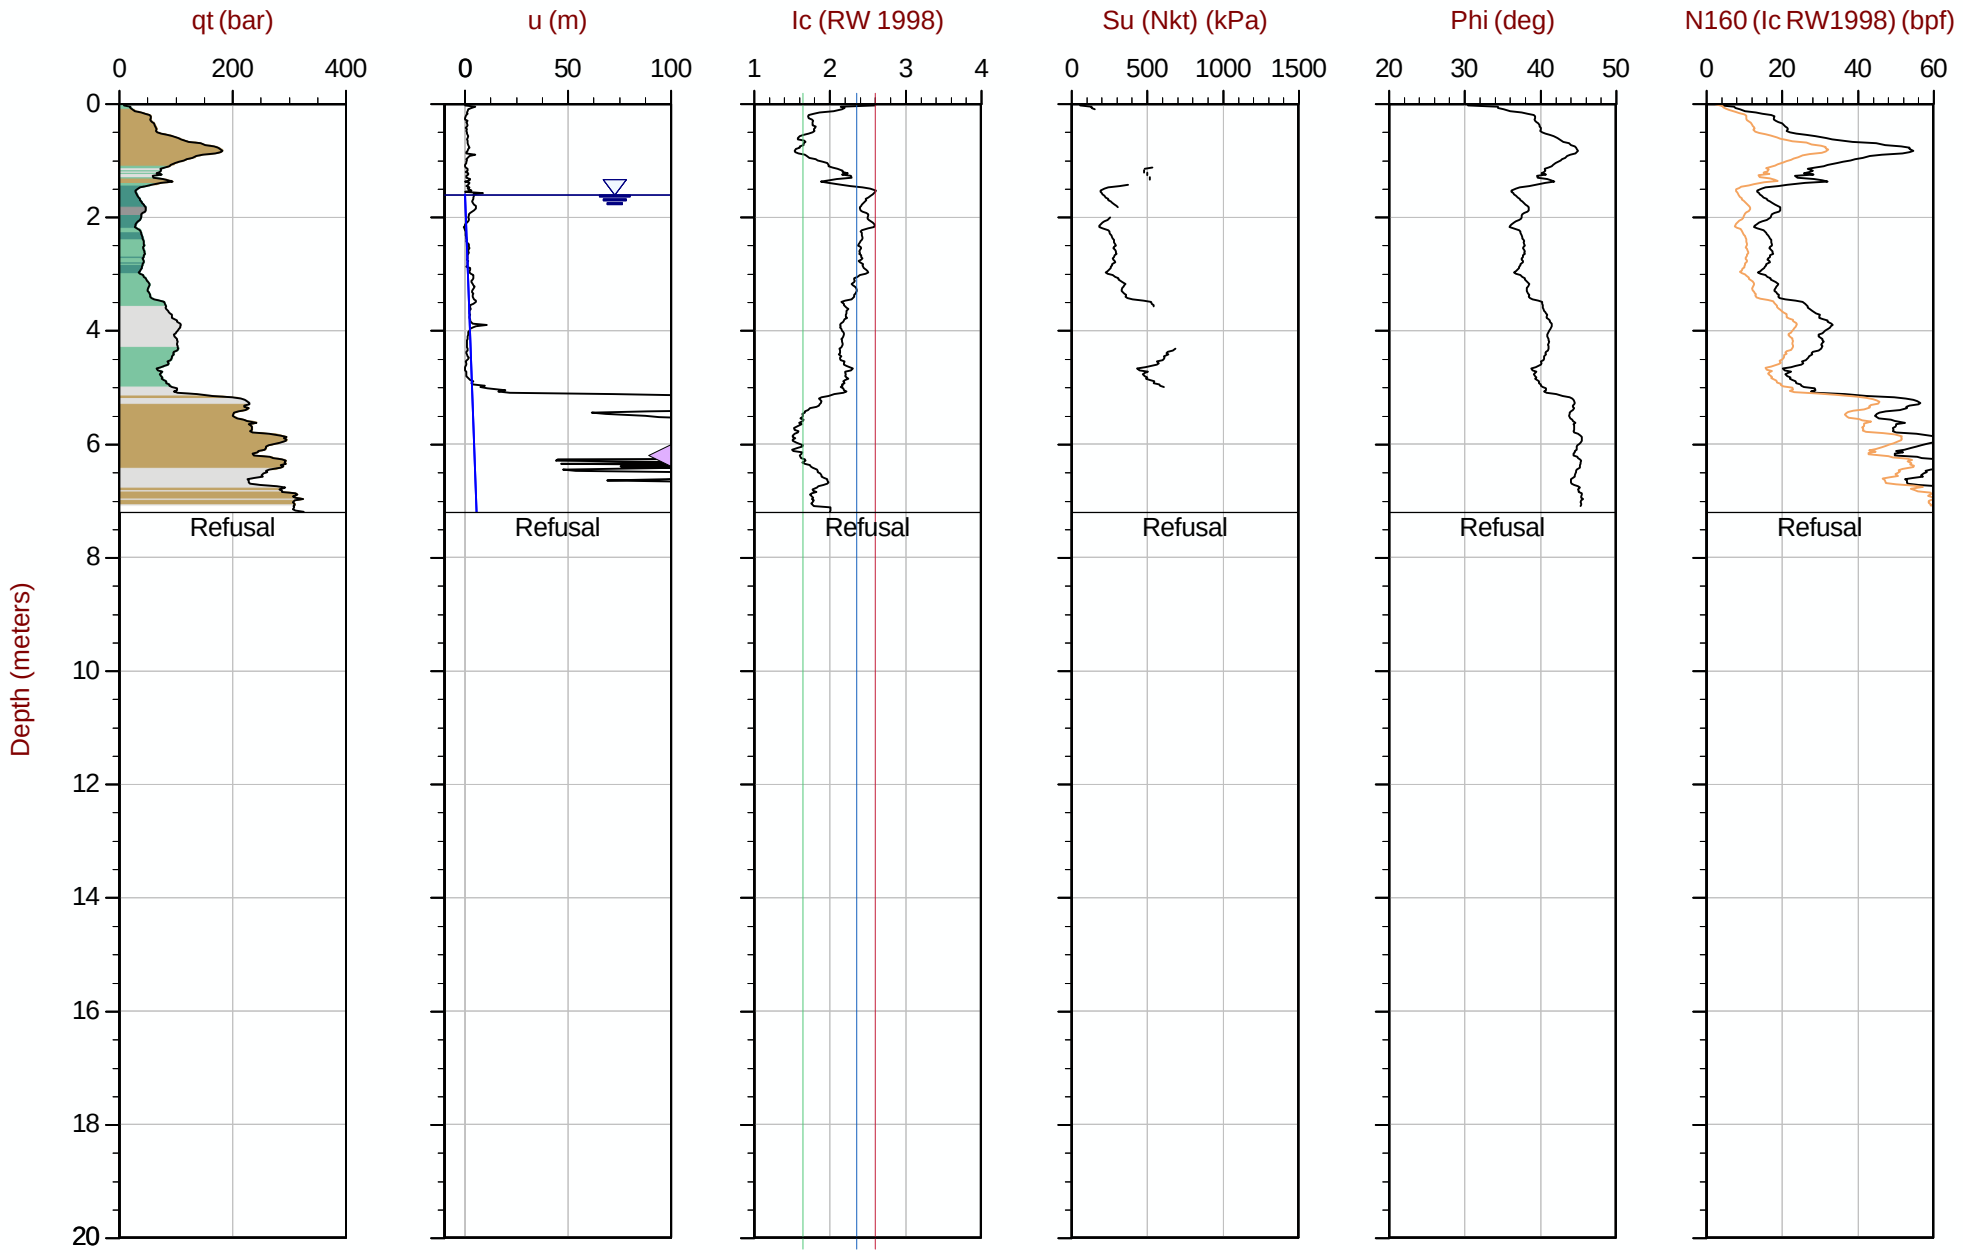

Max Depth: 7.200 m / 23.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT264.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612068m E: 416934m Elev: 767.730m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 10:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT265
Cone: 821:T1000F10U35 Area= 15cm2

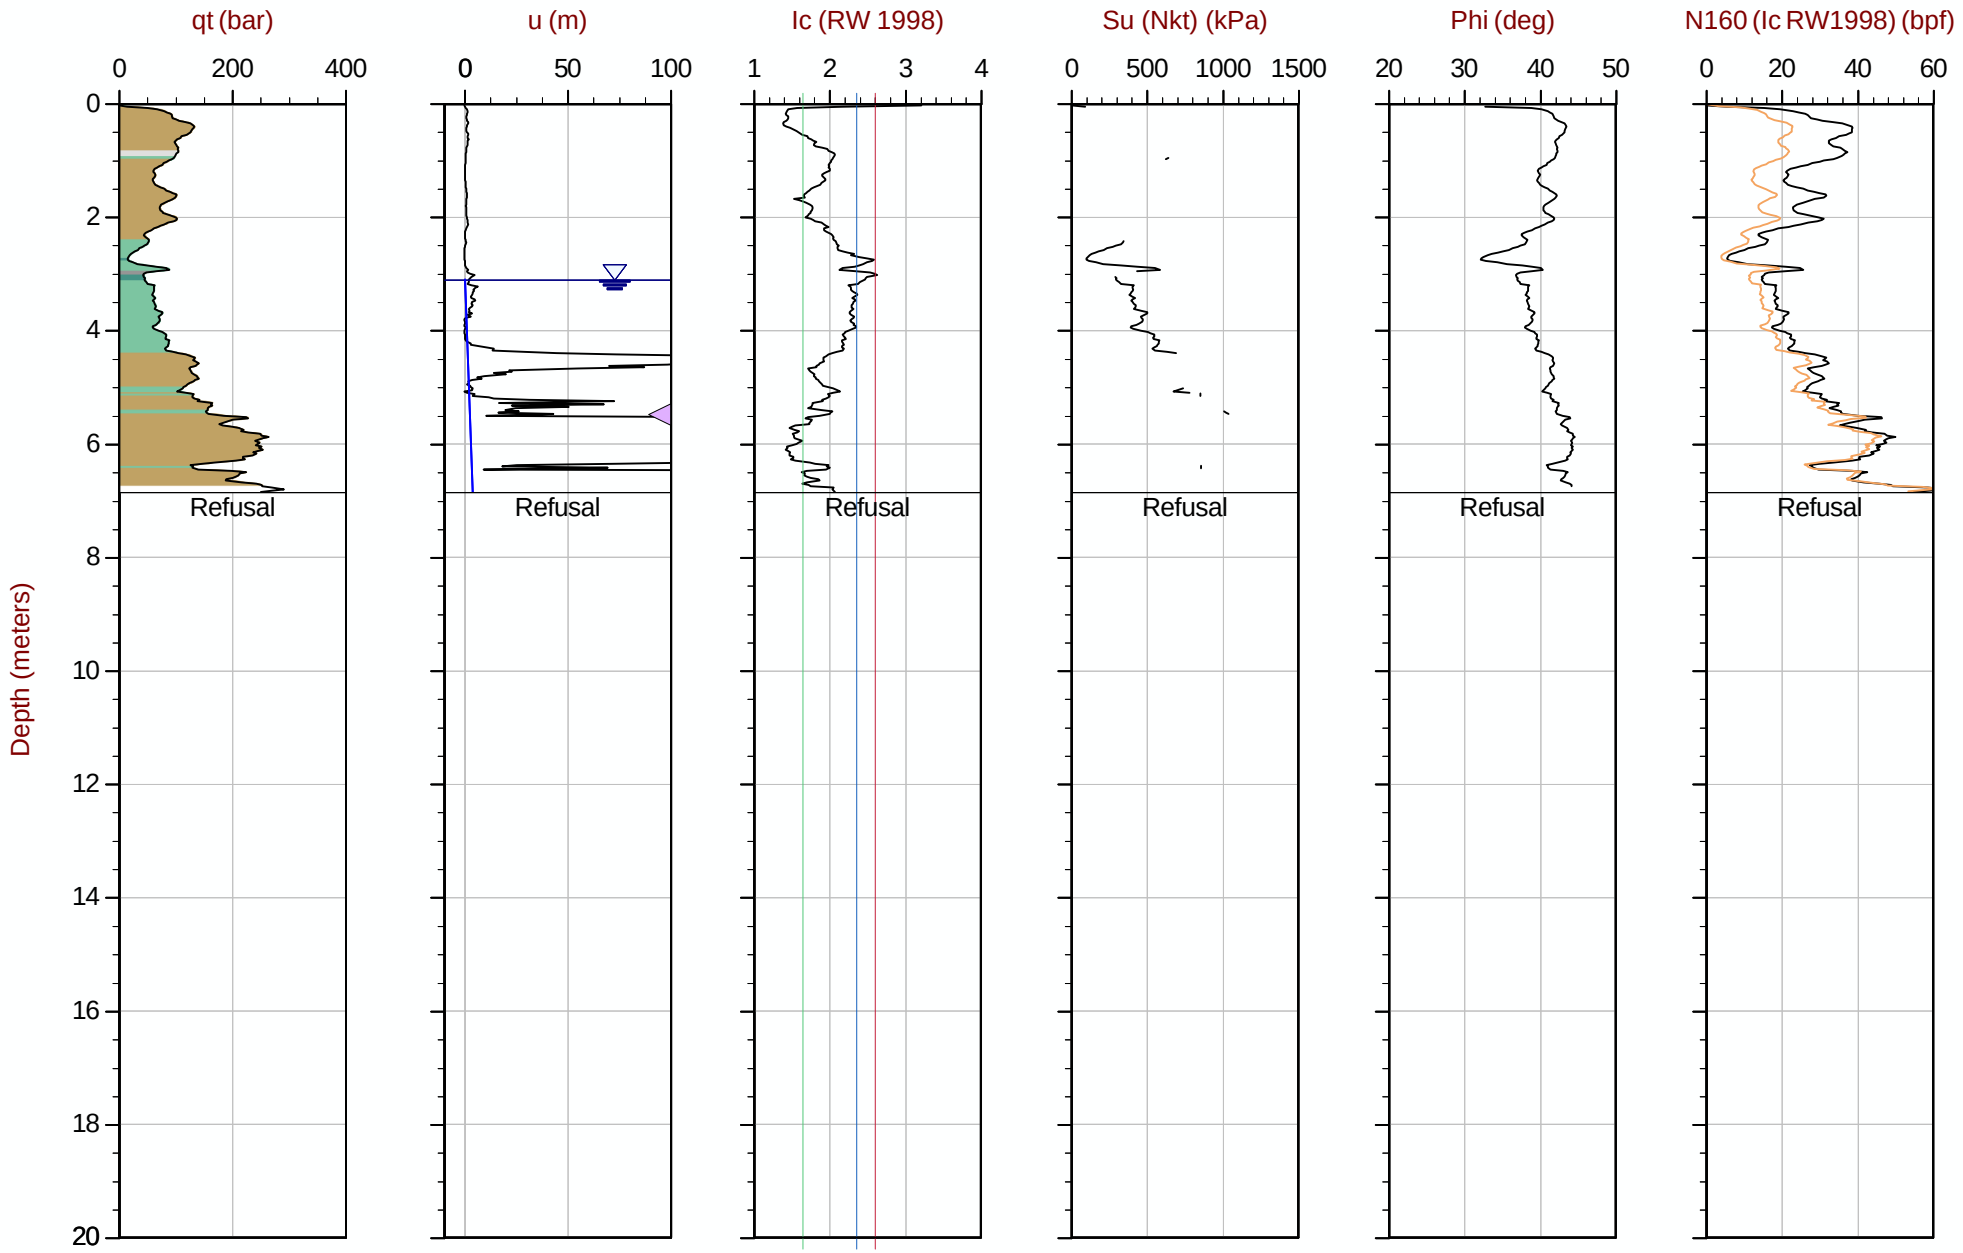

Max Depth: 6.850 m / 22.47 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT265.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611968m E: 416923m Elev: 768.596m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 11:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT266
Cone: 821:T1000F10U35 Area= 15cm2

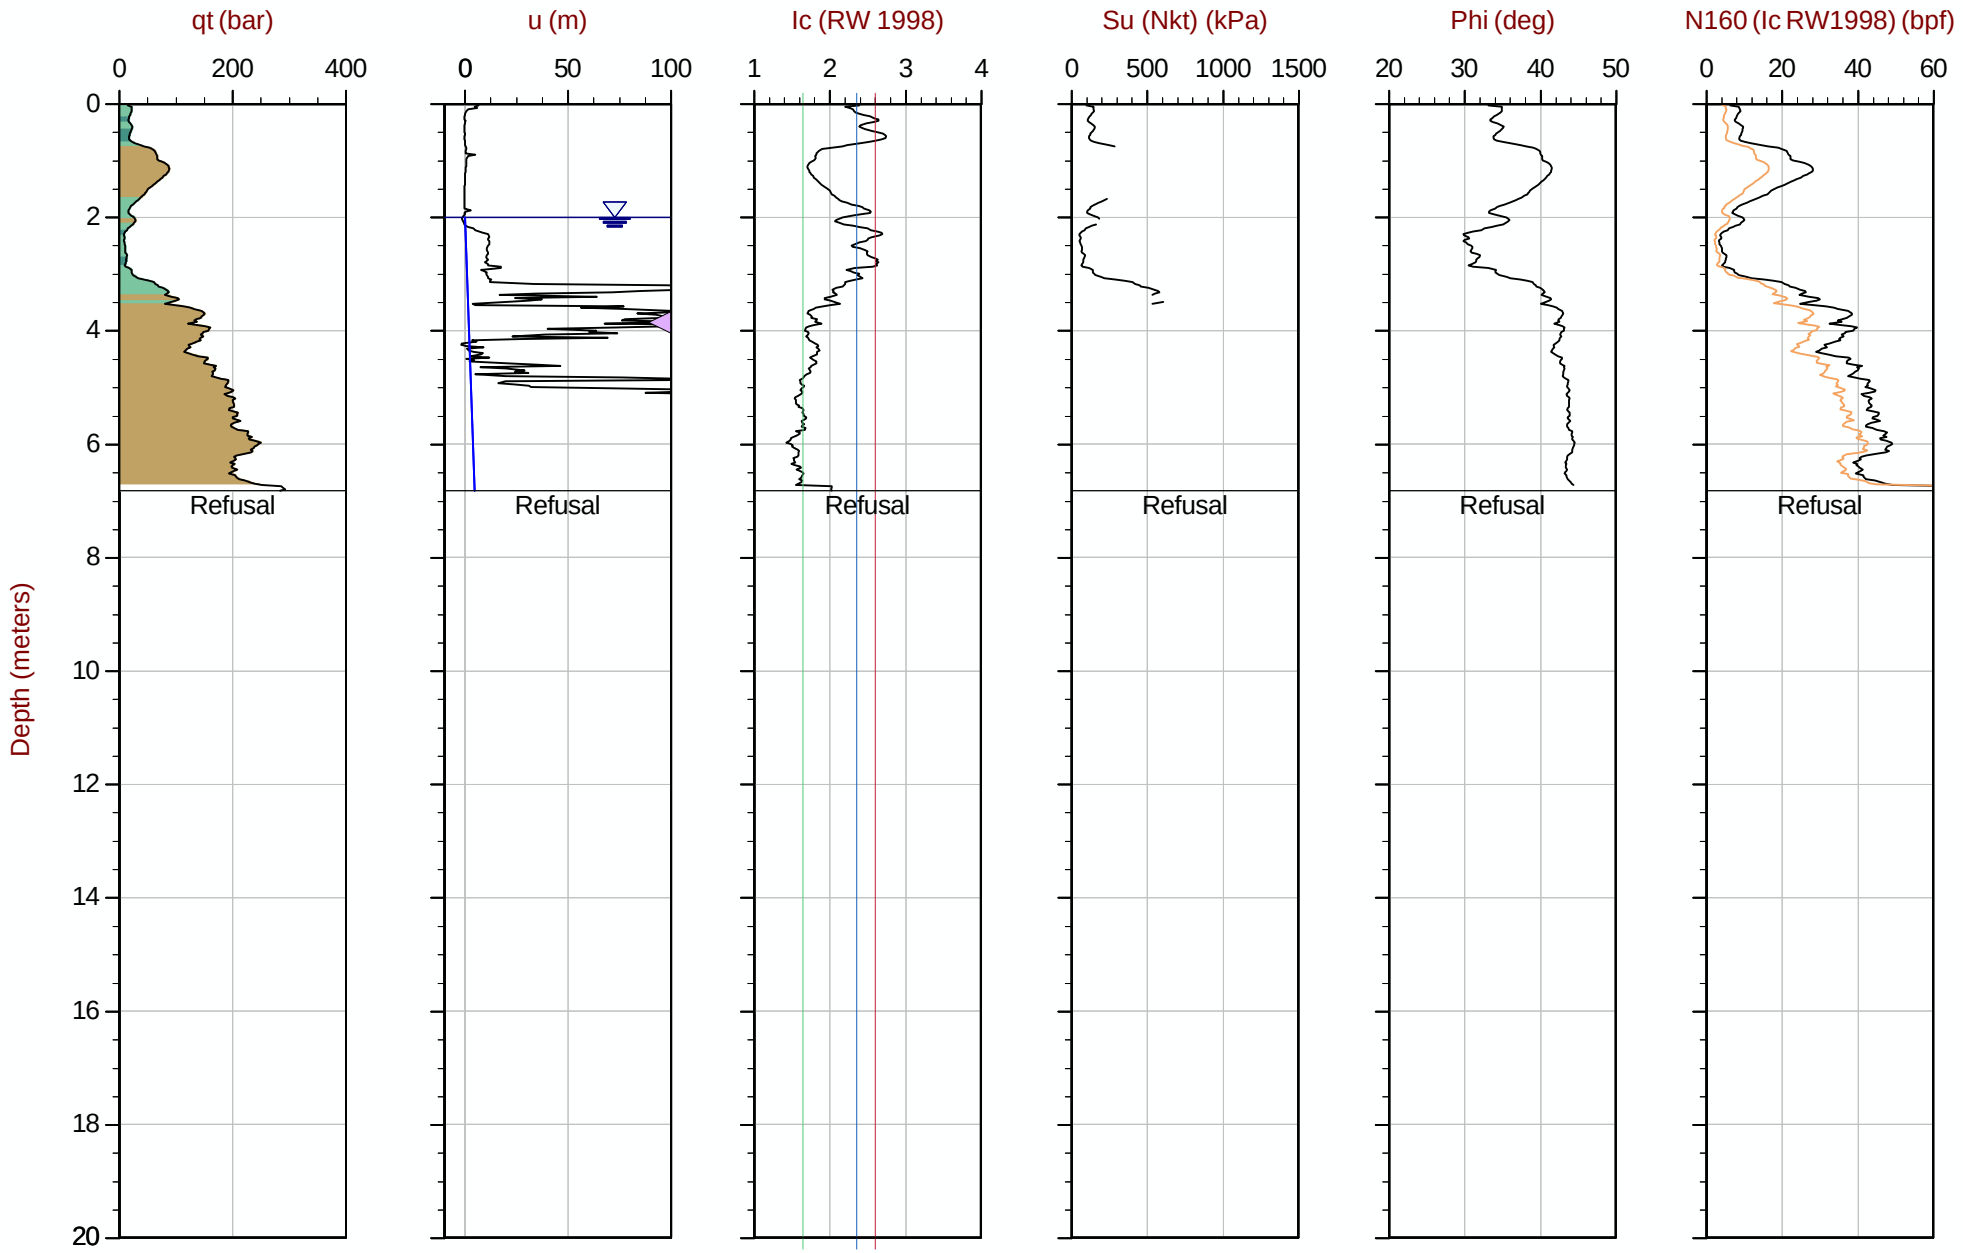

Max Depth: 6.825 m / 22.39 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT266.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611868m E: 416928m Elev: 767.825m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 12:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT267
Cone: 821:T1000F10U35 Area= 15cm2

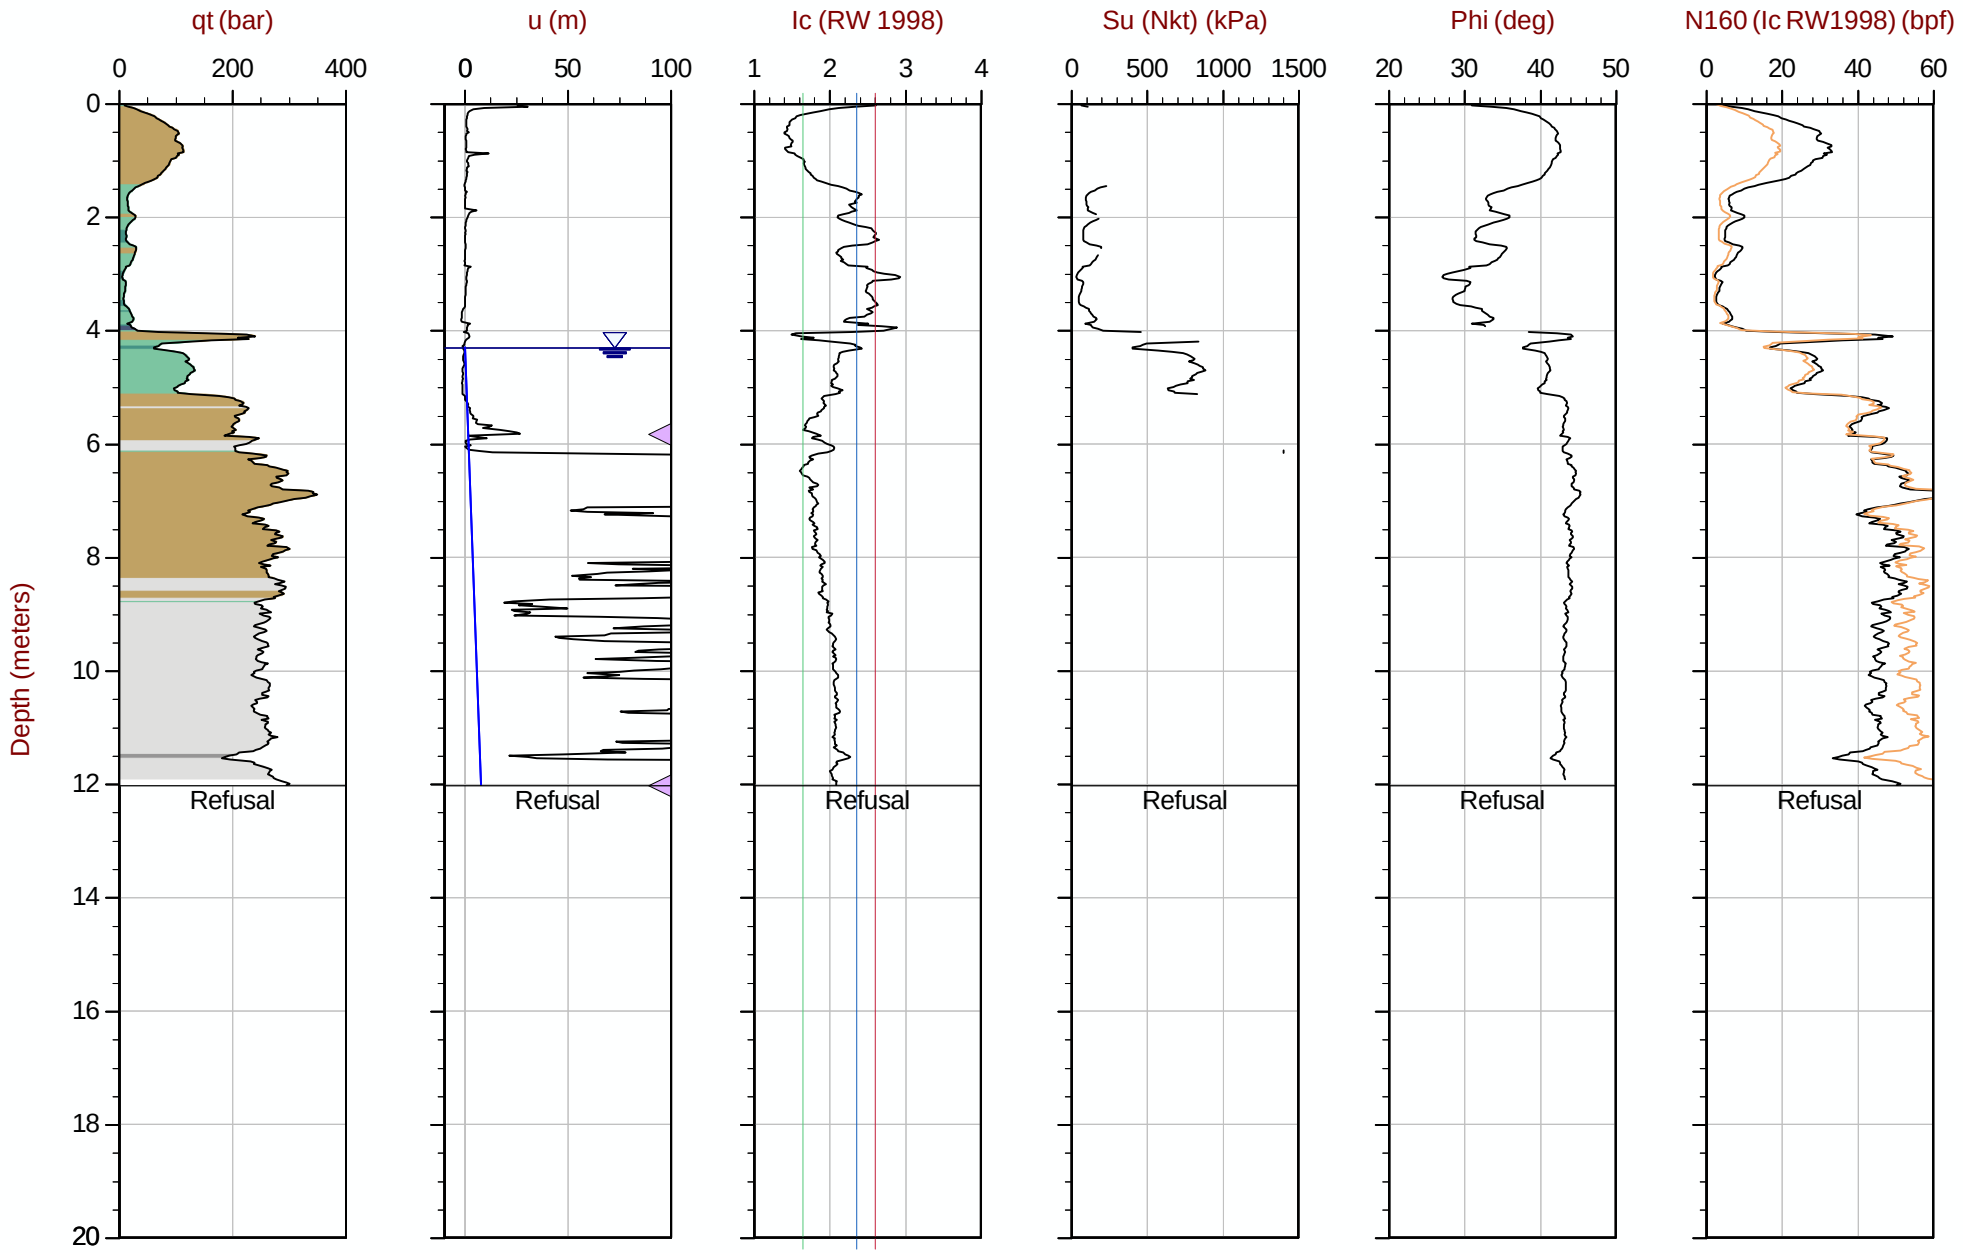

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT267.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611768m E: 416923m Elev: 769.139m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 13:49
Site: Brooks, Alberta

Sounding: RCPT22-22CPT269
Cone: 821:T1000F10U35 Area= 15cm2

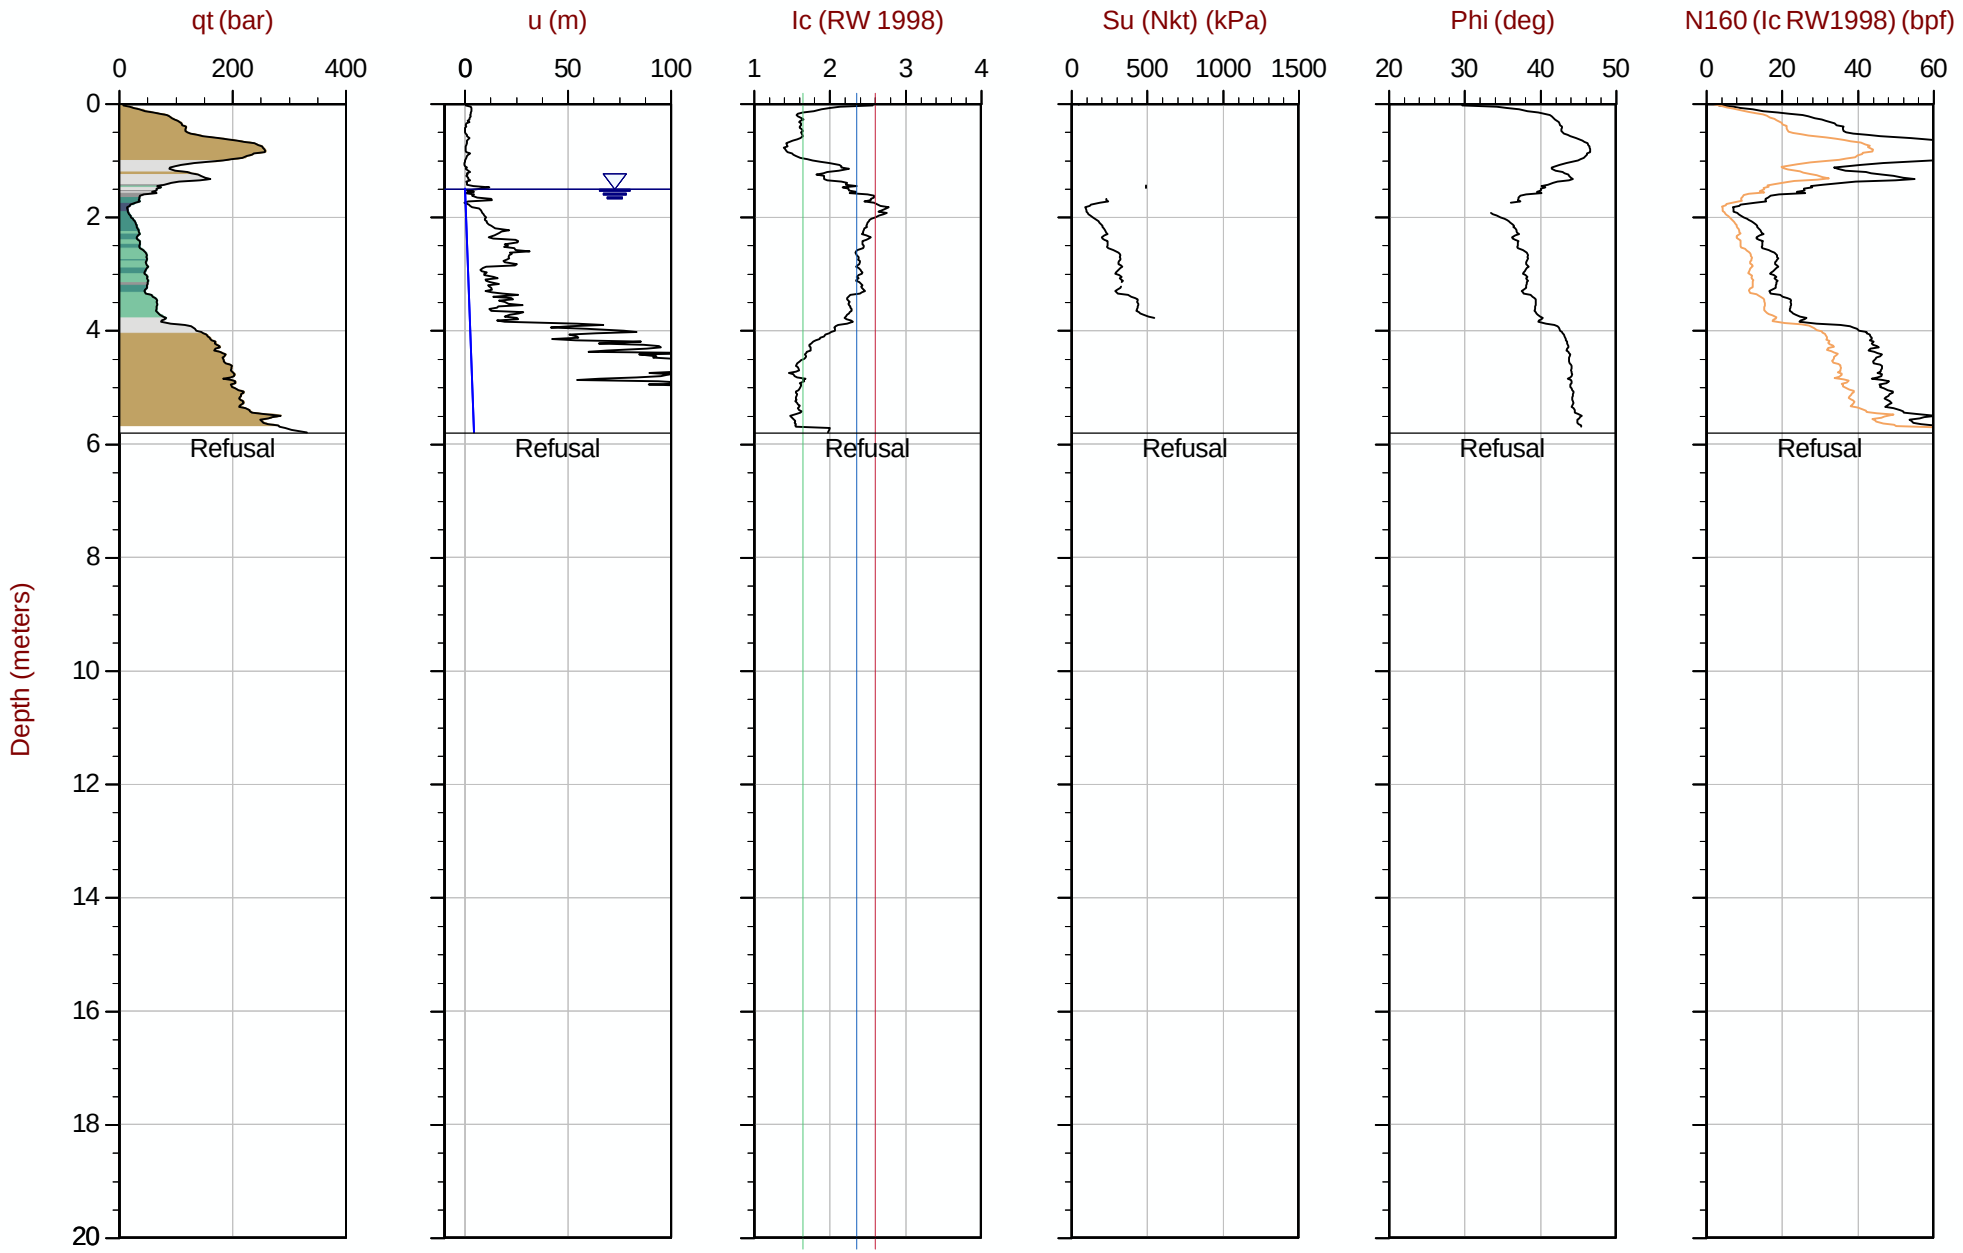

Max Depth: 5.800 m / 19.03 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT269.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611568m E: 416917m Elev: 767.995m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 14:40
Site: Brooks, Alberta

Sounding: RCPT22-22CPT270
Cone: 821:T1000F10U35 Area= 15cm2

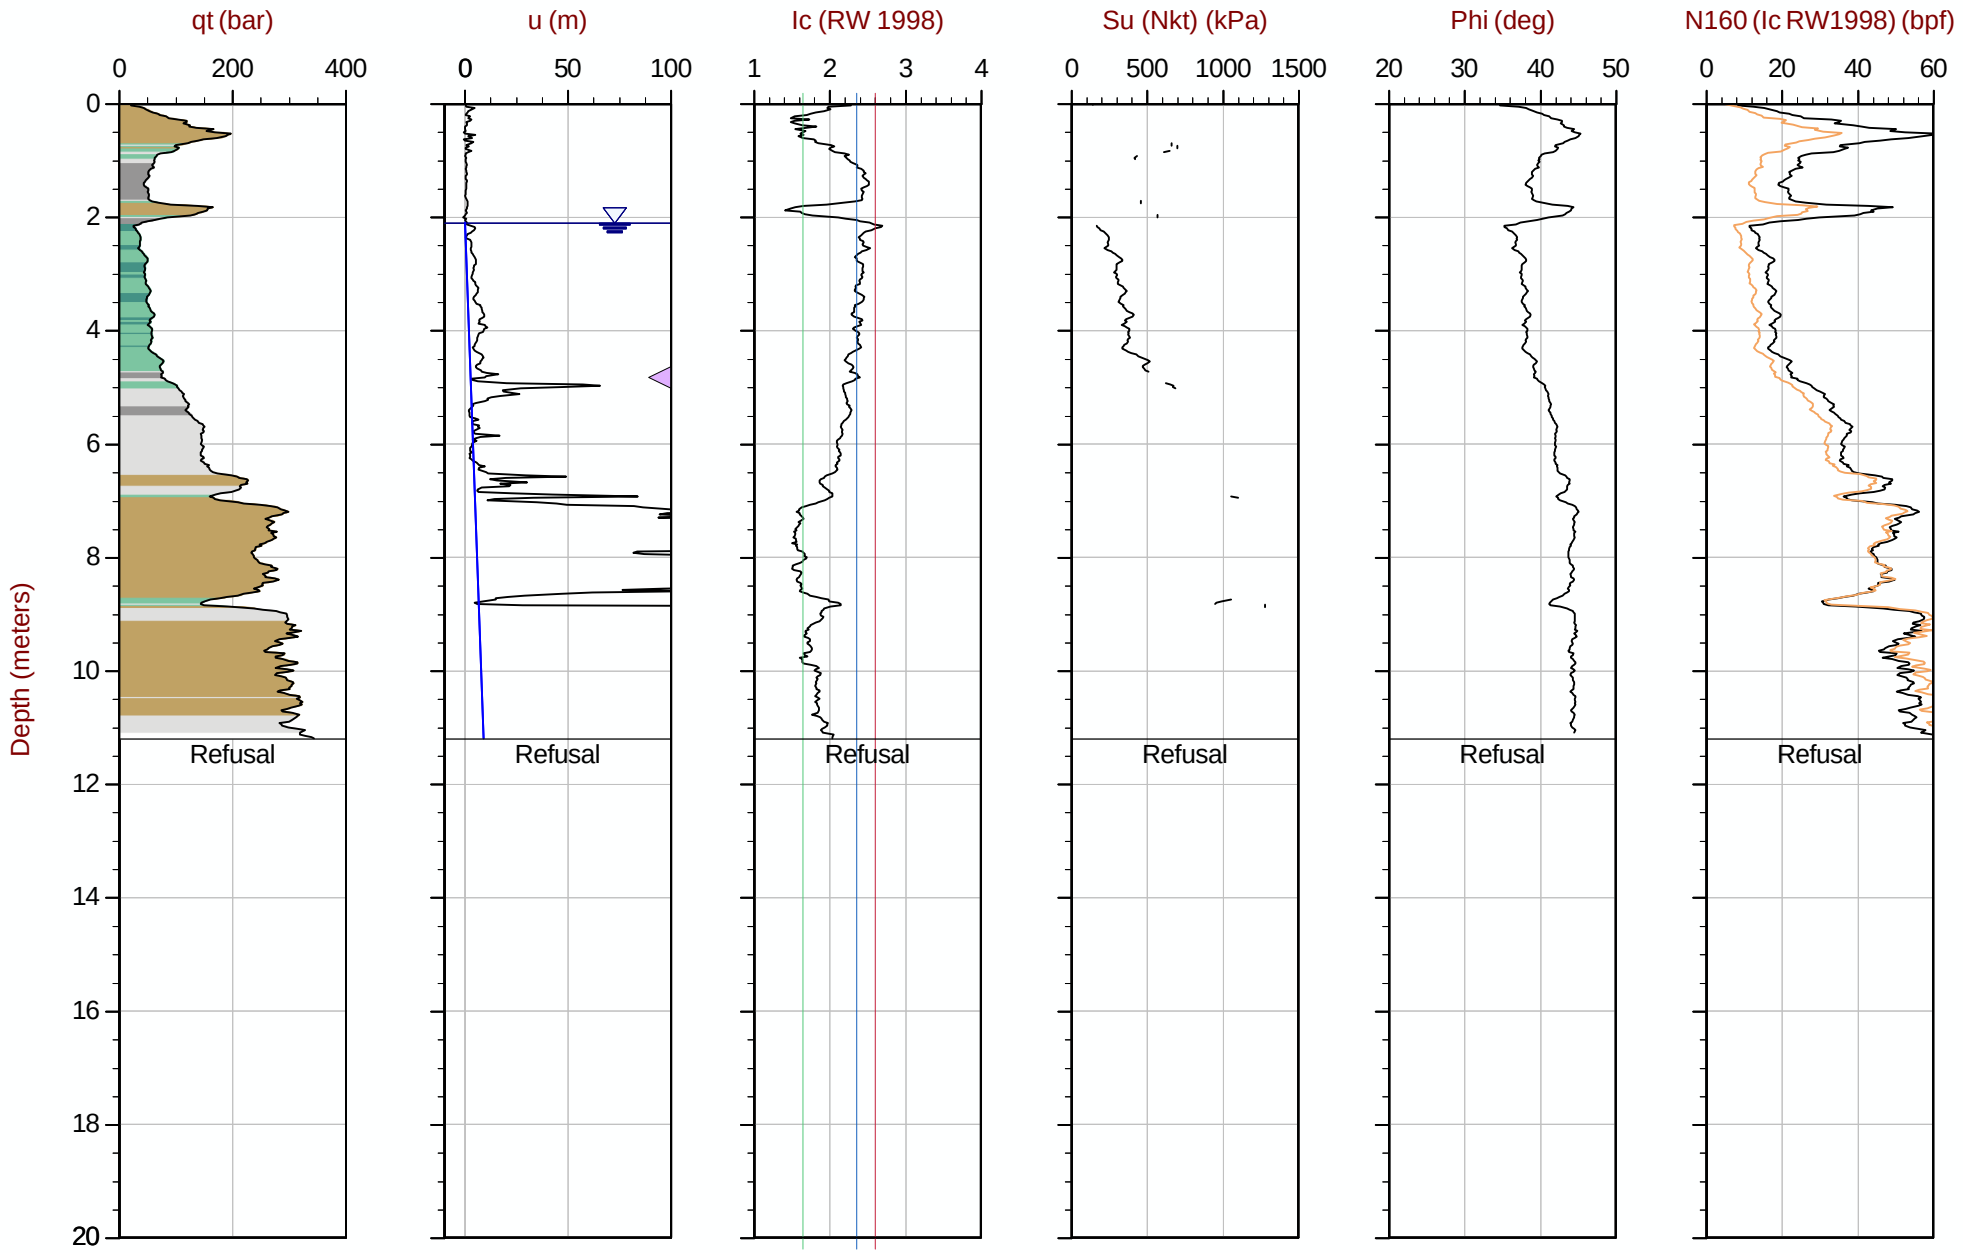

Max Depth: 11.200 m / 36.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT270.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611468m E: 416921m Elev: 768.473m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 15:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT271
Cone: 821:T1000F10U35 Area= 15cm2

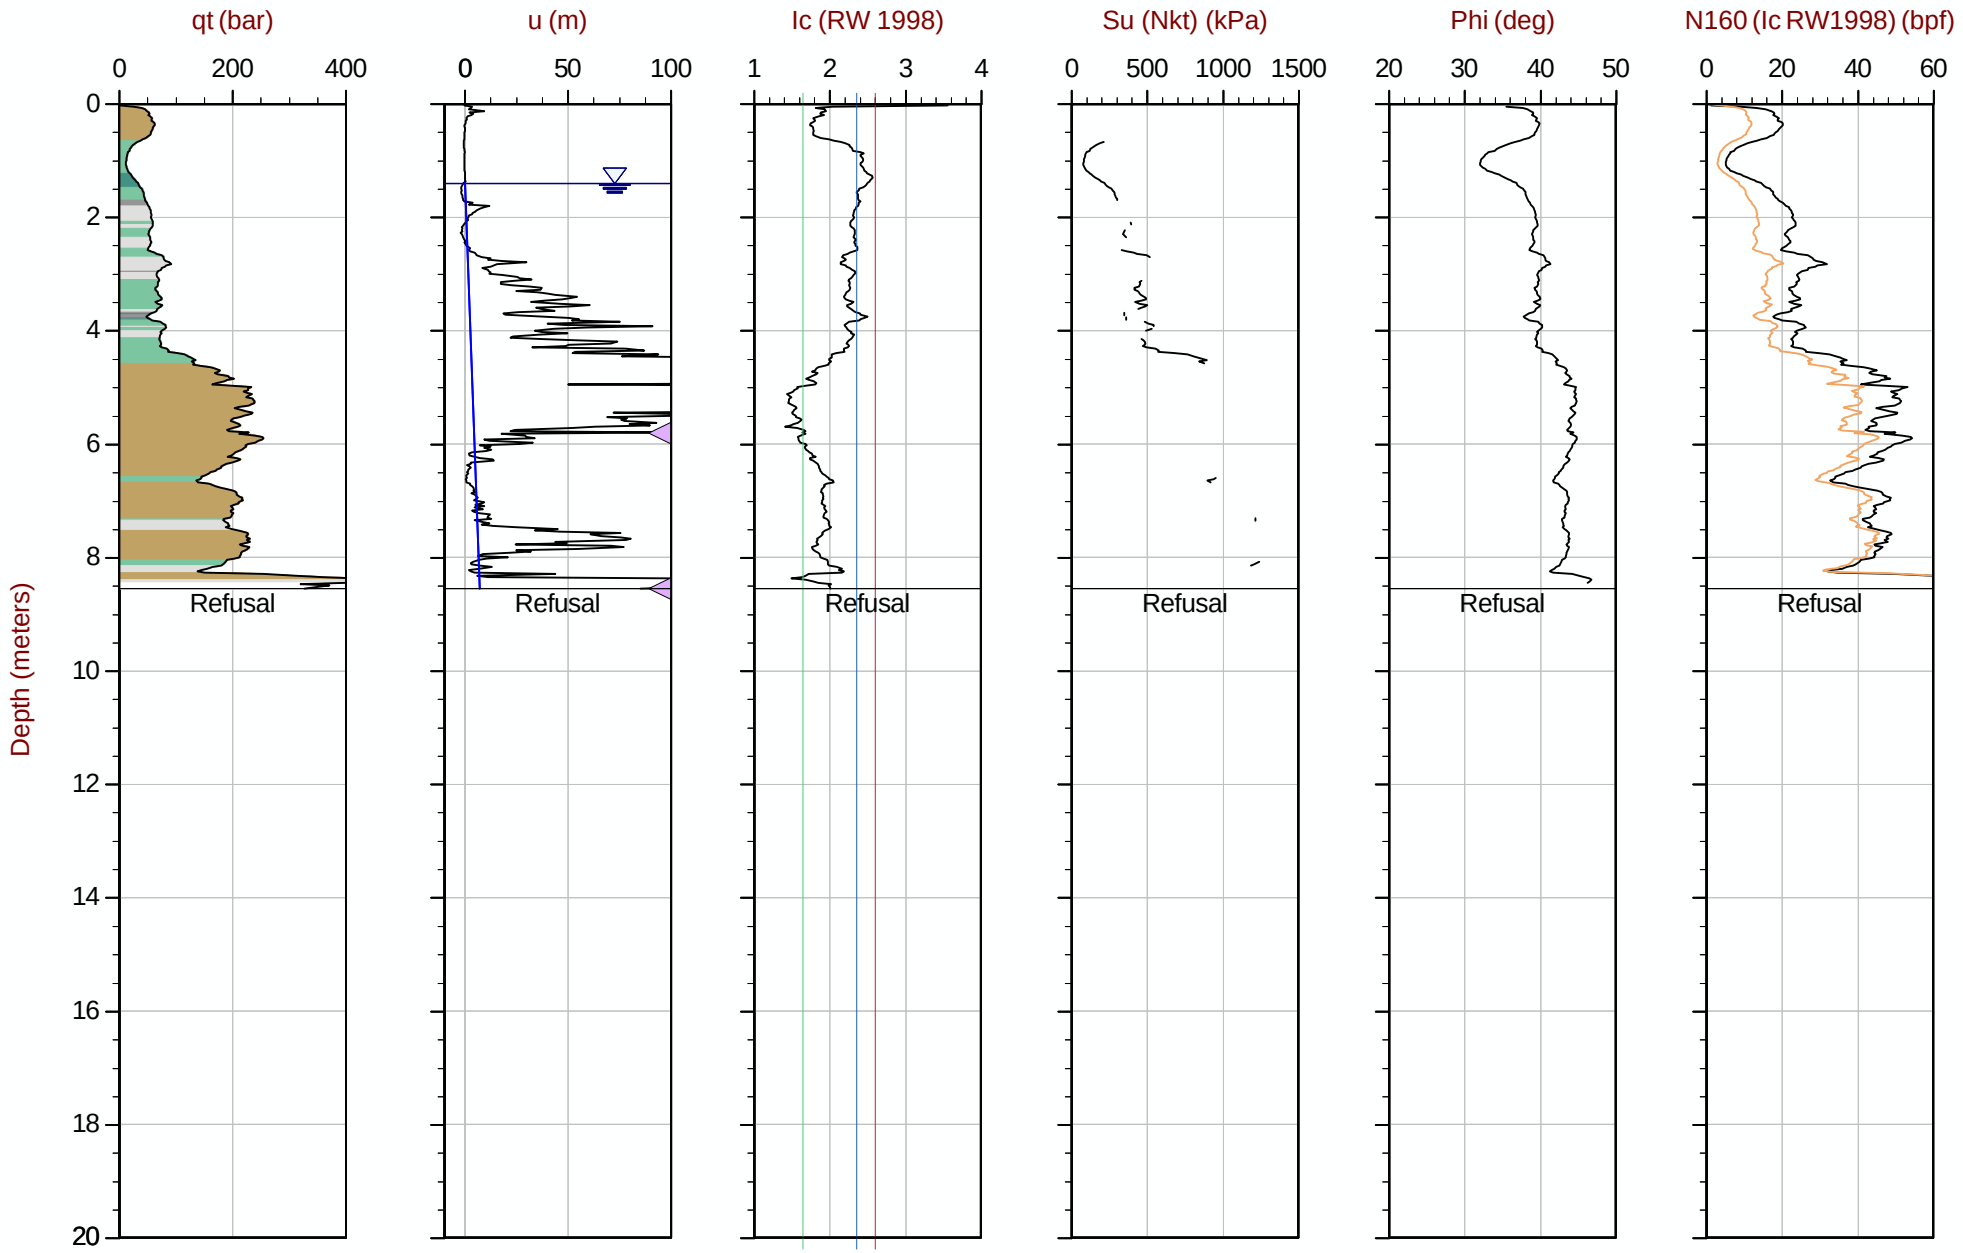

Max Depth: 8.550 m / 28.05 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT271.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611368m E: 416929m Elev: 765.259m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 08:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT272
Cone: 821:T1000F10U35 Area= 15cm2

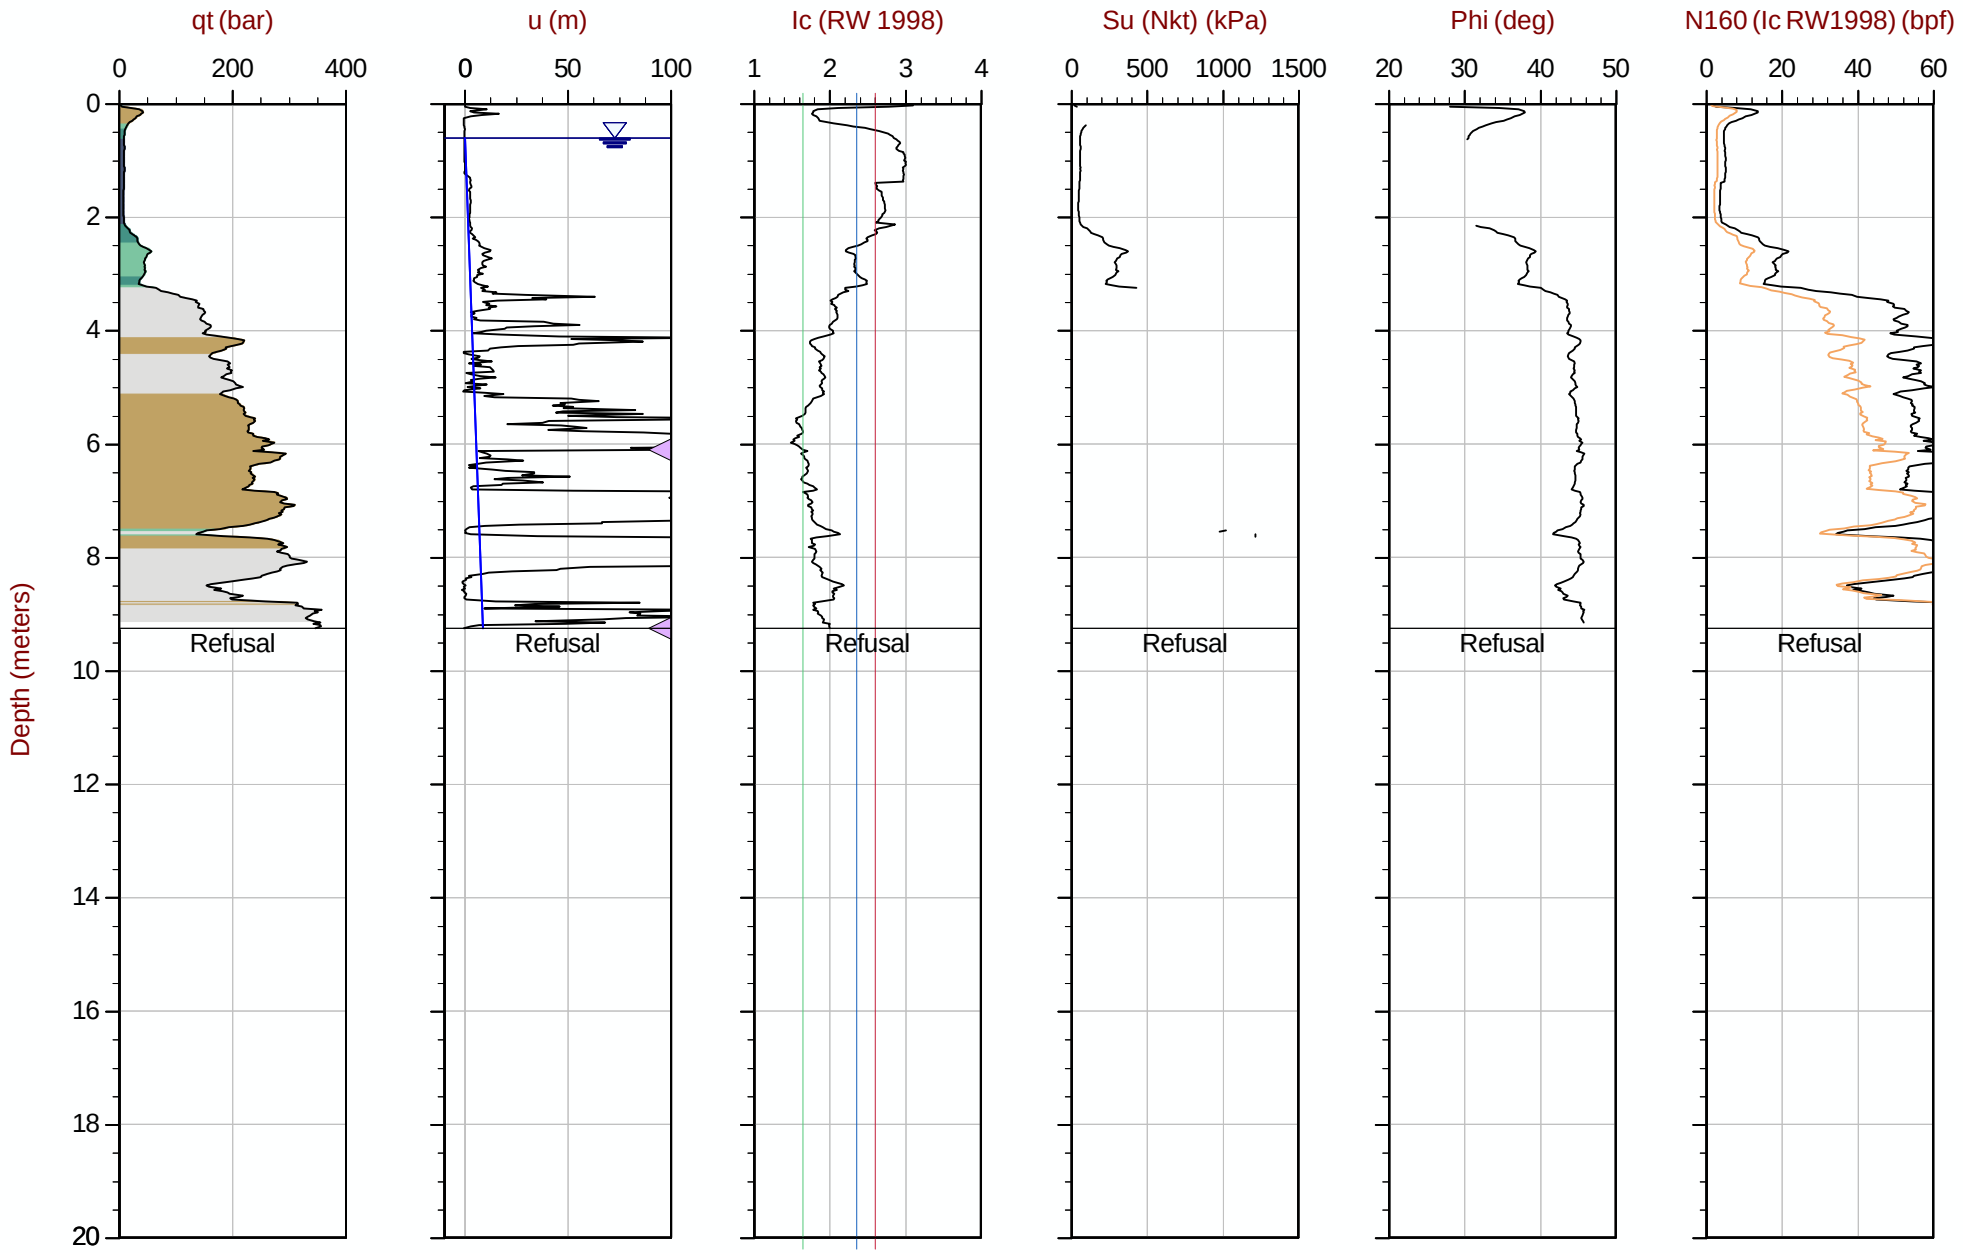

Max Depth: 9.250 m / 30.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT272.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611268m E: 416927m Elev: 764.158m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-13 09:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT273
Cone: 821:T1000F10U35 Area= 15cm2

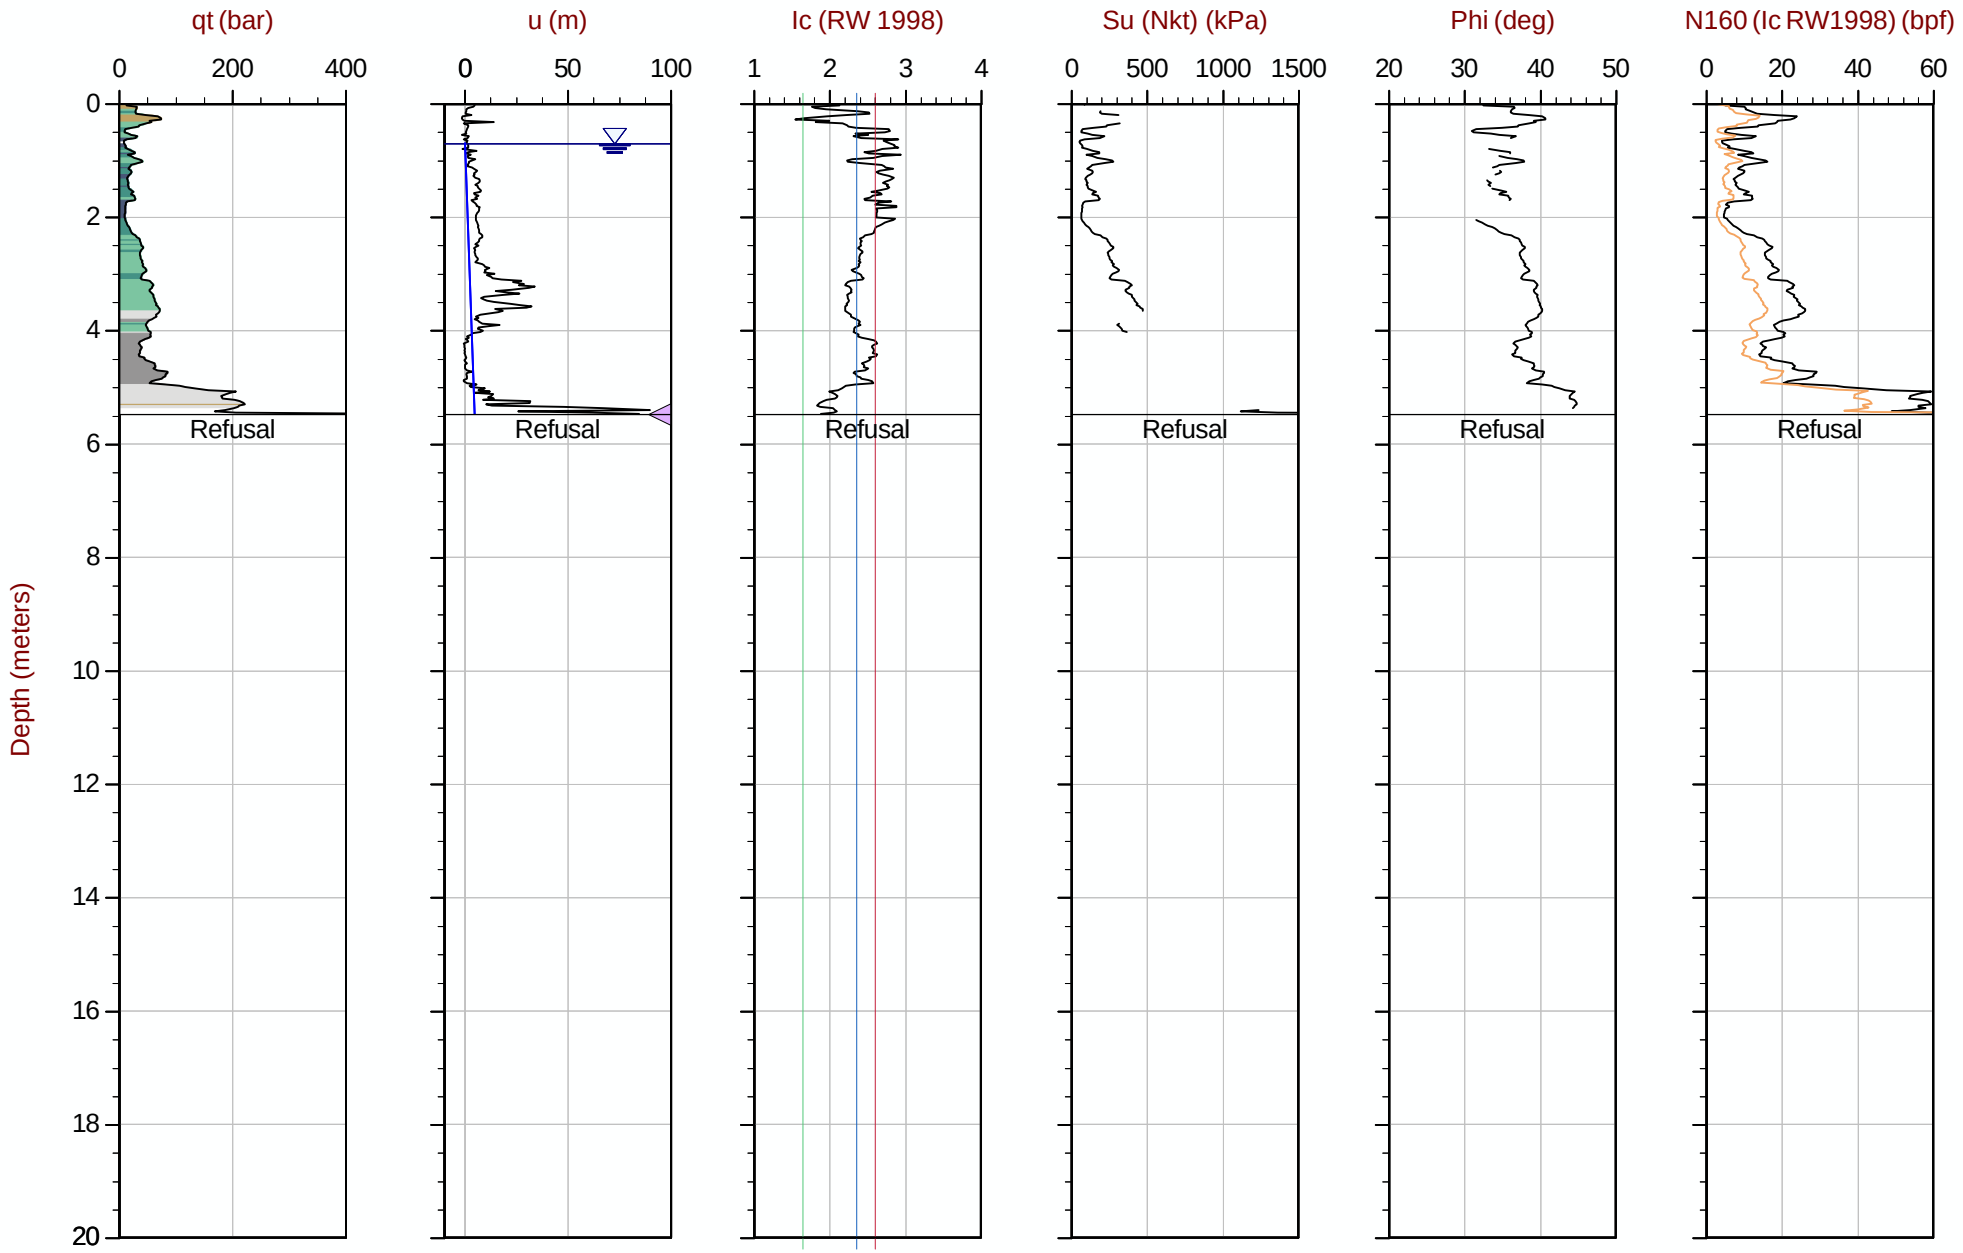

Max Depth: 5.475 m / 17.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT273.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611168m E: 416915m Elev: 765.344m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 17:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT274
Cone: 854:T1500F15U35 Area= 15cm2

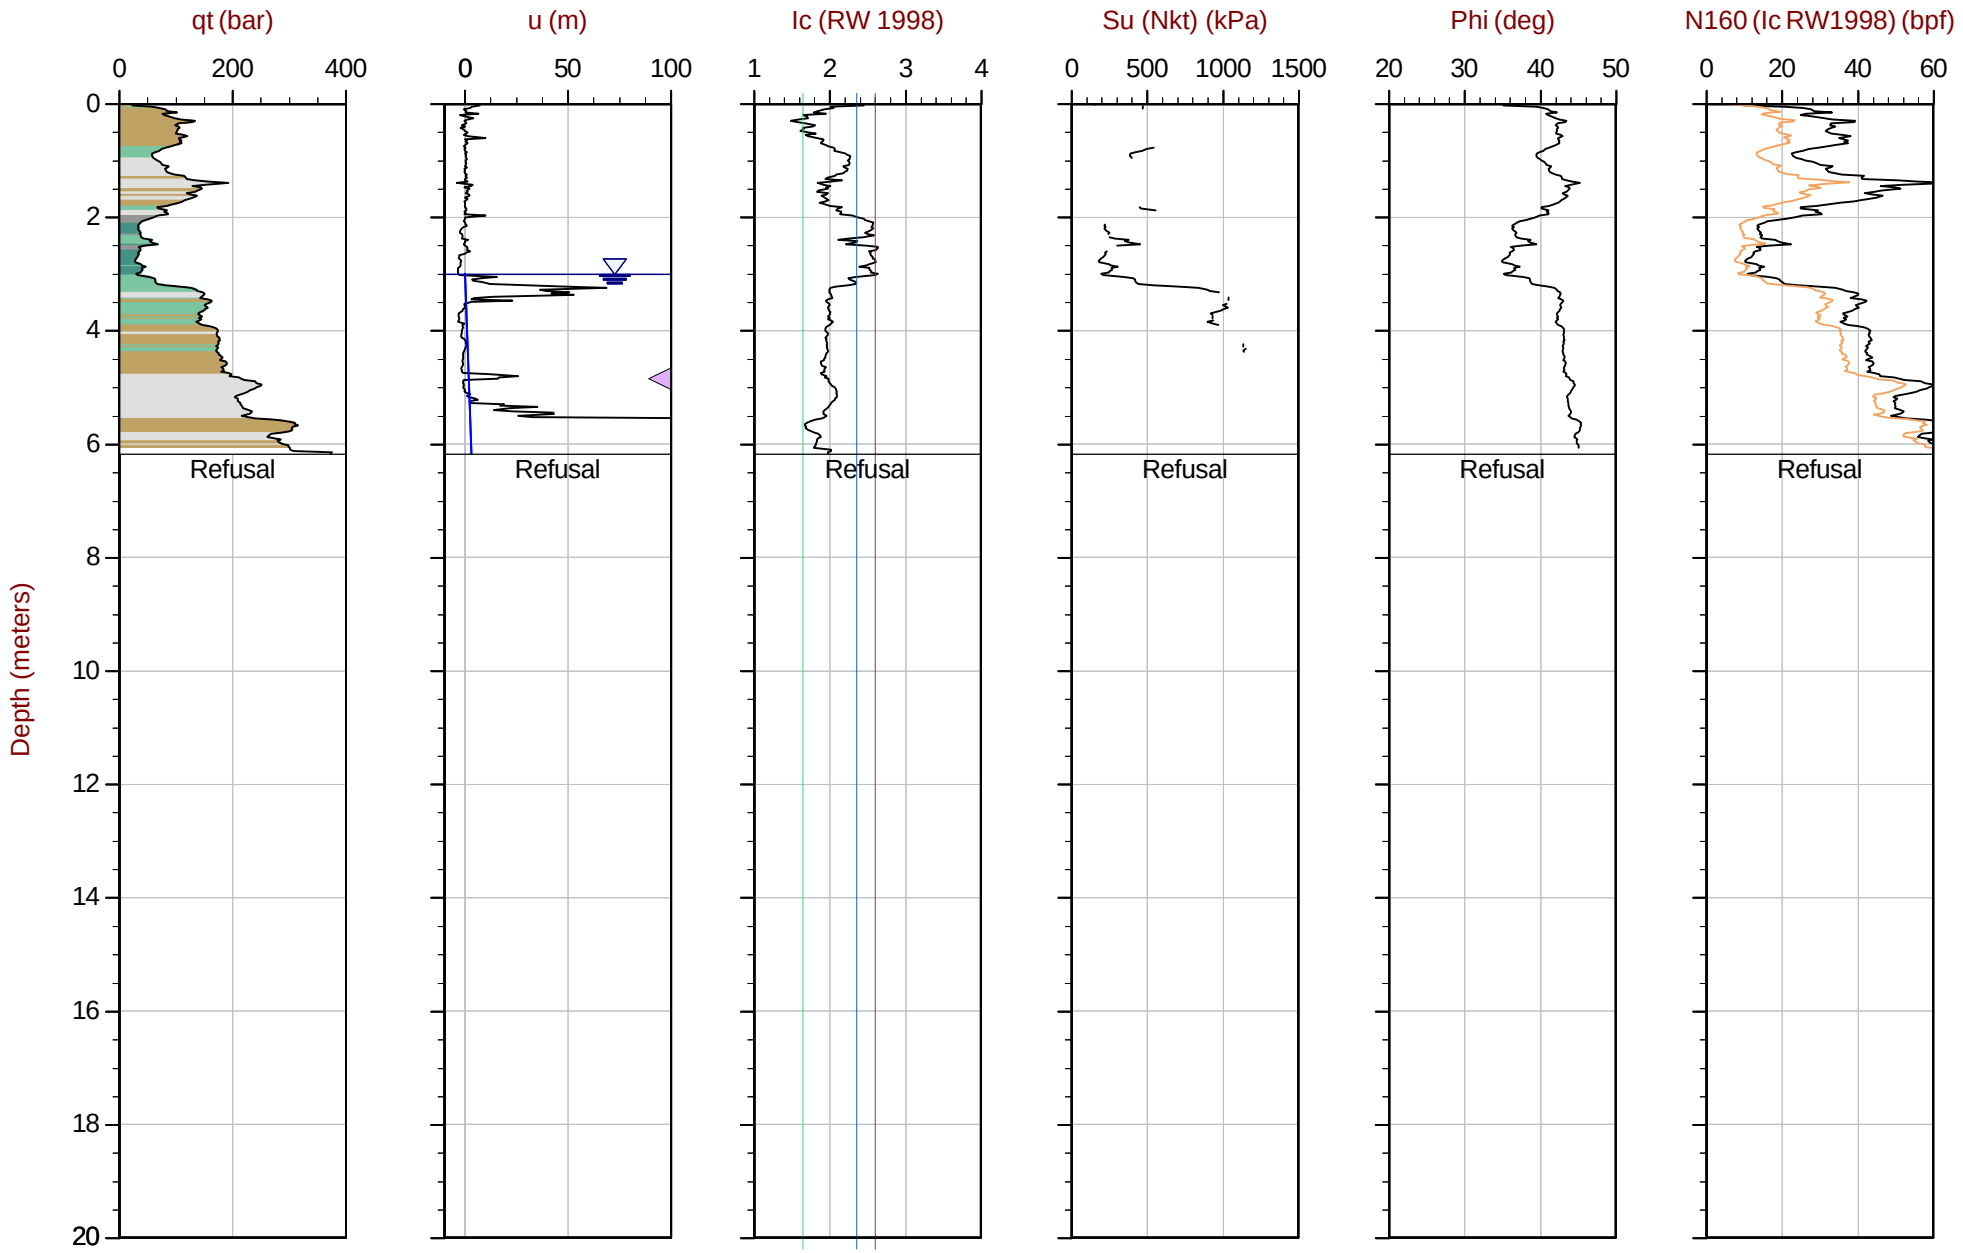

Max Depth: 6.175 m / 20.26 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT274.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611069m E: 416914m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 06:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT275
Cone: 854:T1500F15U35 Area= 15cm2

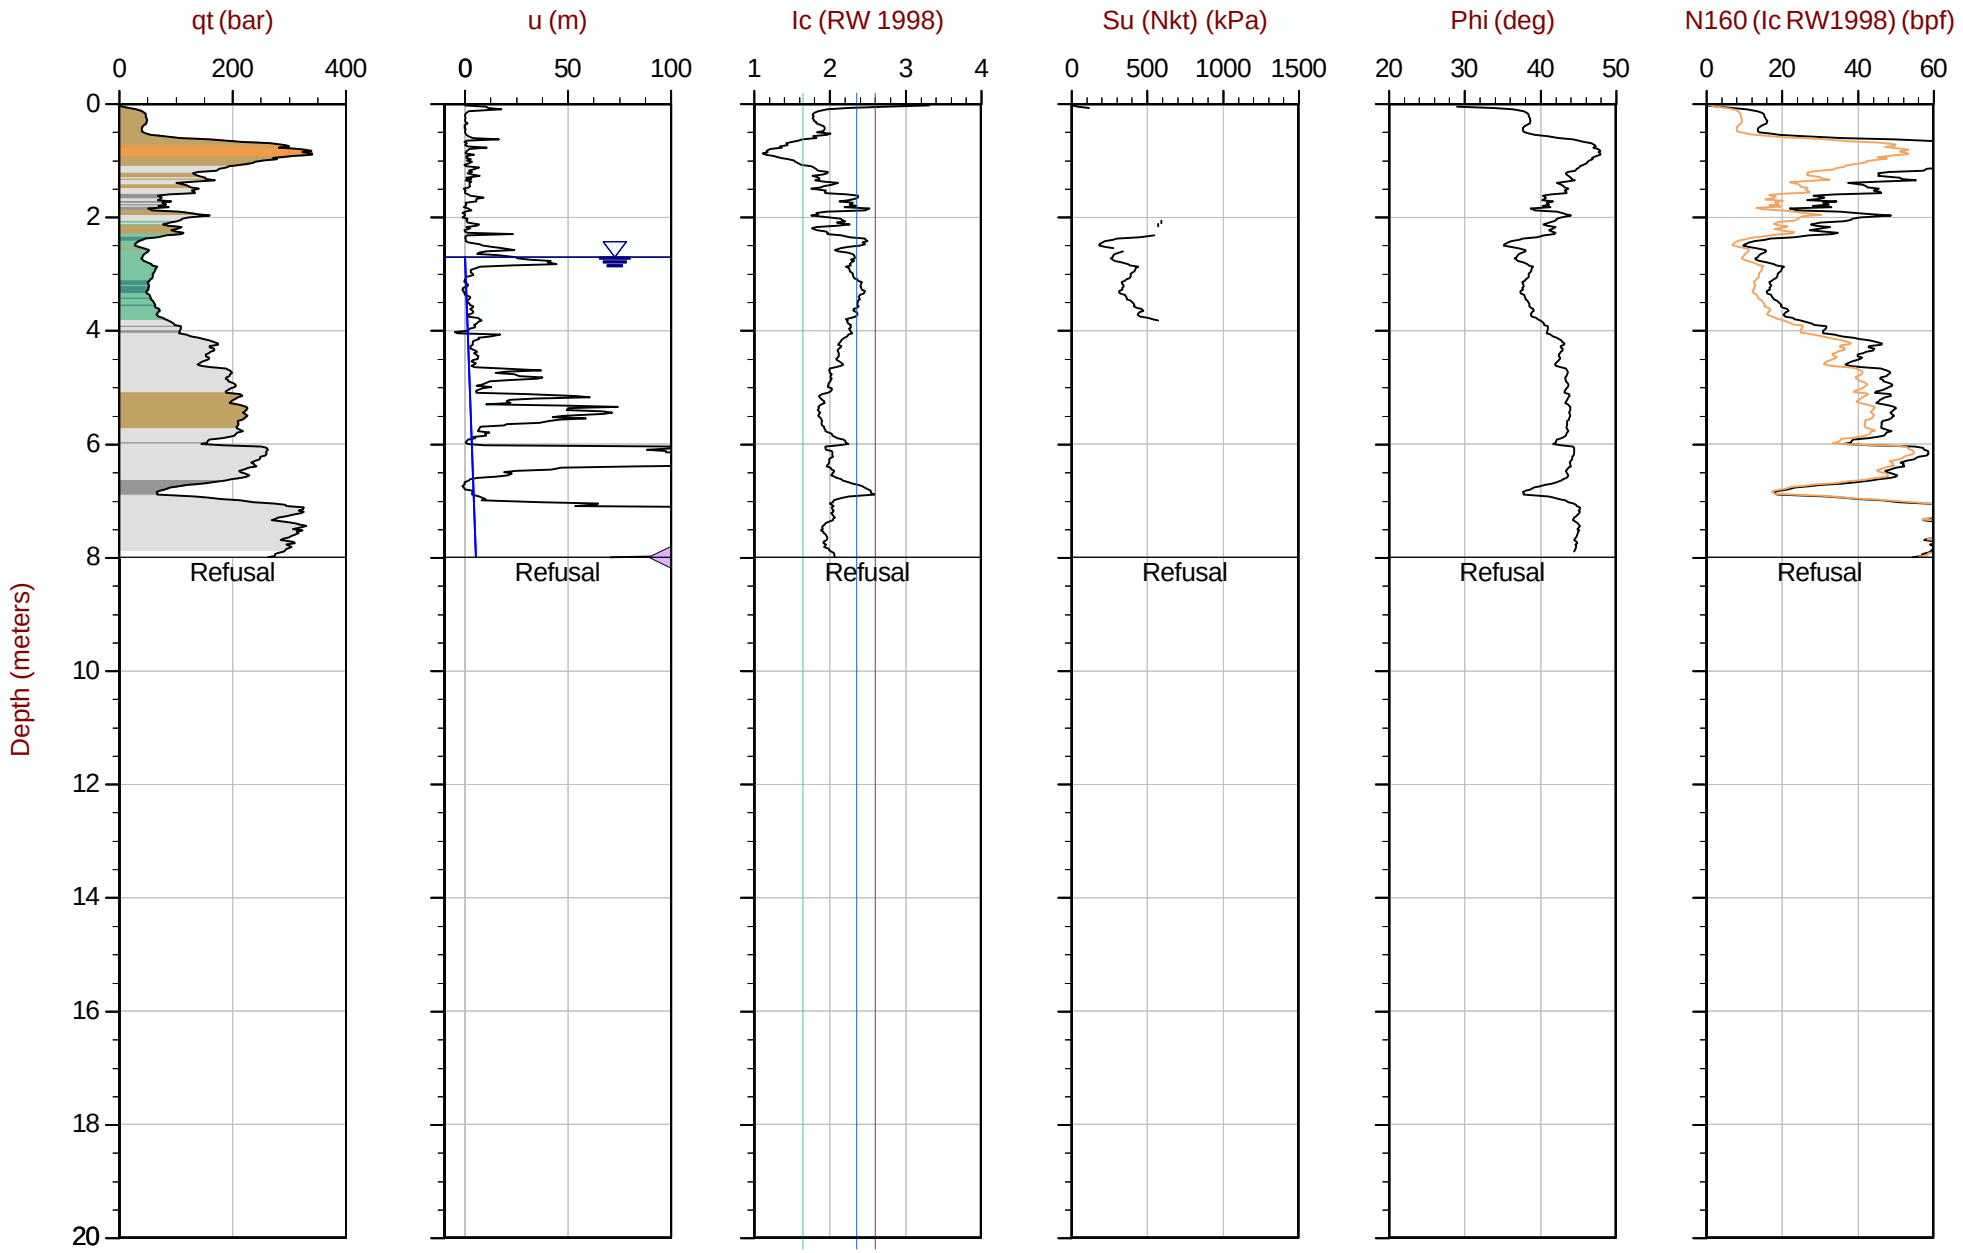

Max Depth: 8.000 m / 26.25 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT275.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610969m E: 416914m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 07:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT276
Cone: 854:T1500F15U35 Area= 15cm2

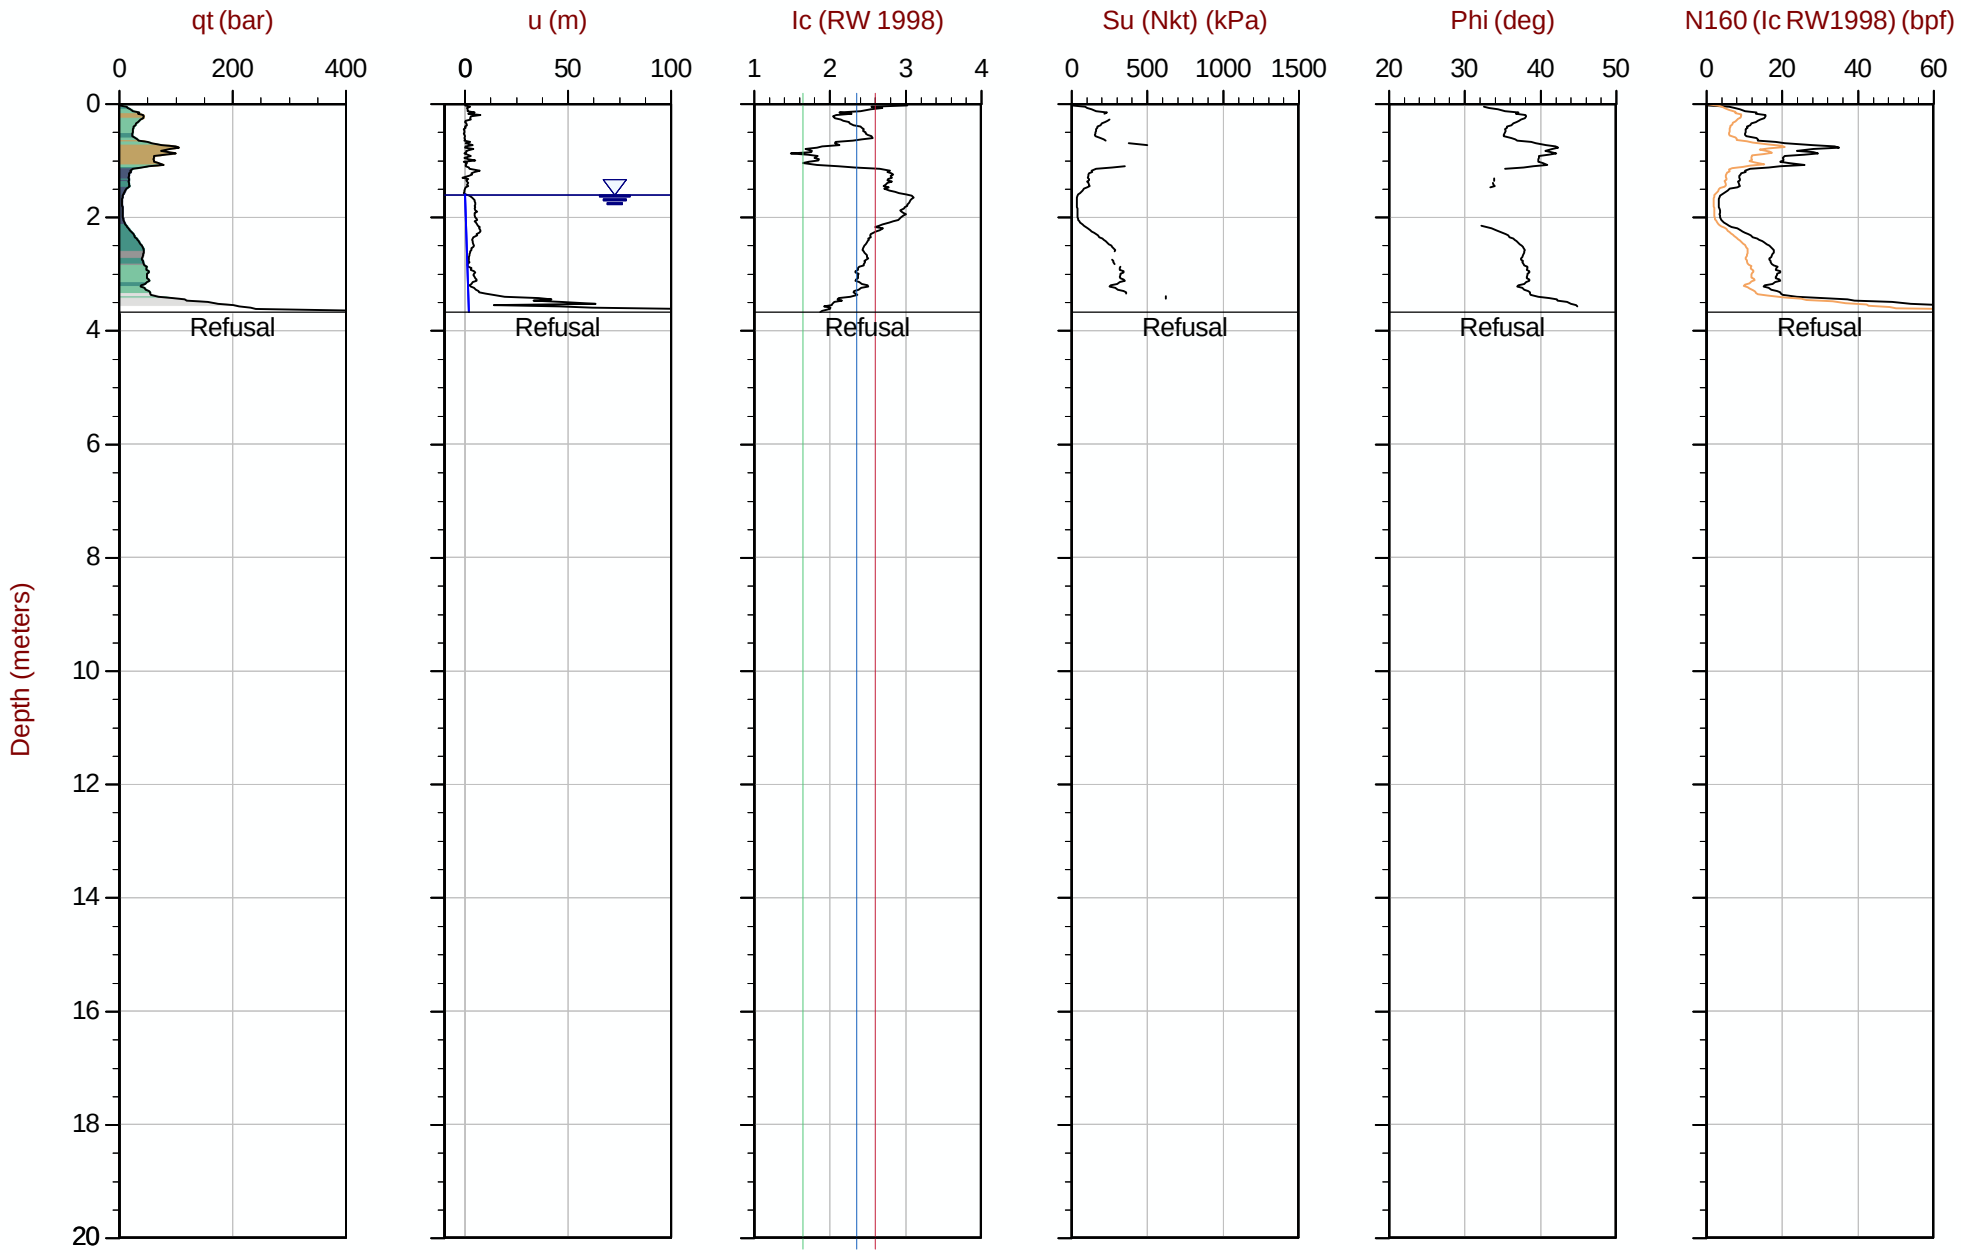

Max Depth: 3.675 m / 12.06 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT276.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610969m E: 416916m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 07:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT276B
Cone: 854:T1500F15U35 Area= 15cm2

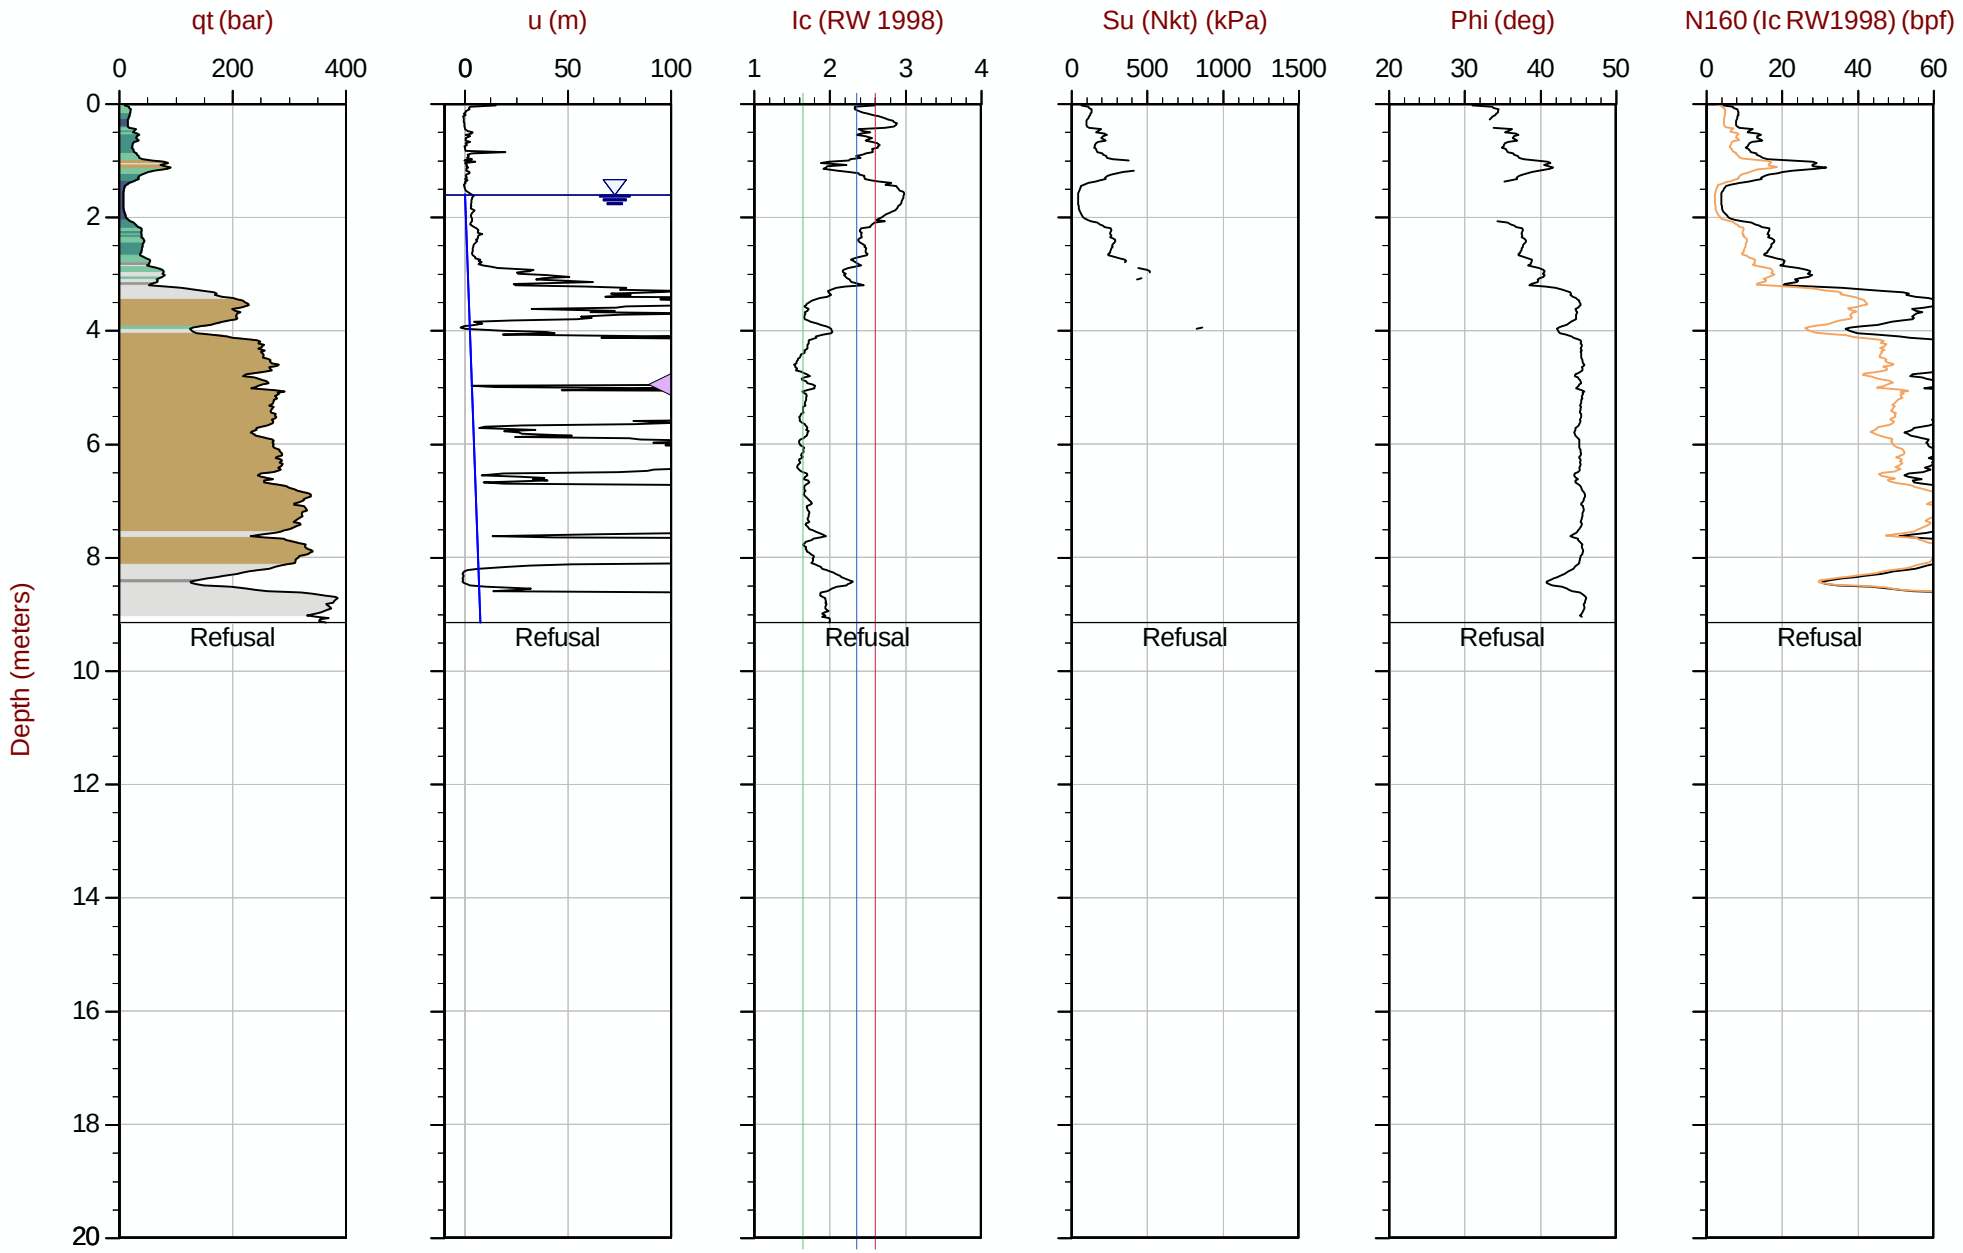

Max Depth: 9.150 m / 30.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT276B.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610969m E: 416916m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 09:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT277
Cone: 854:T1500F15U35 Area= 15cm2

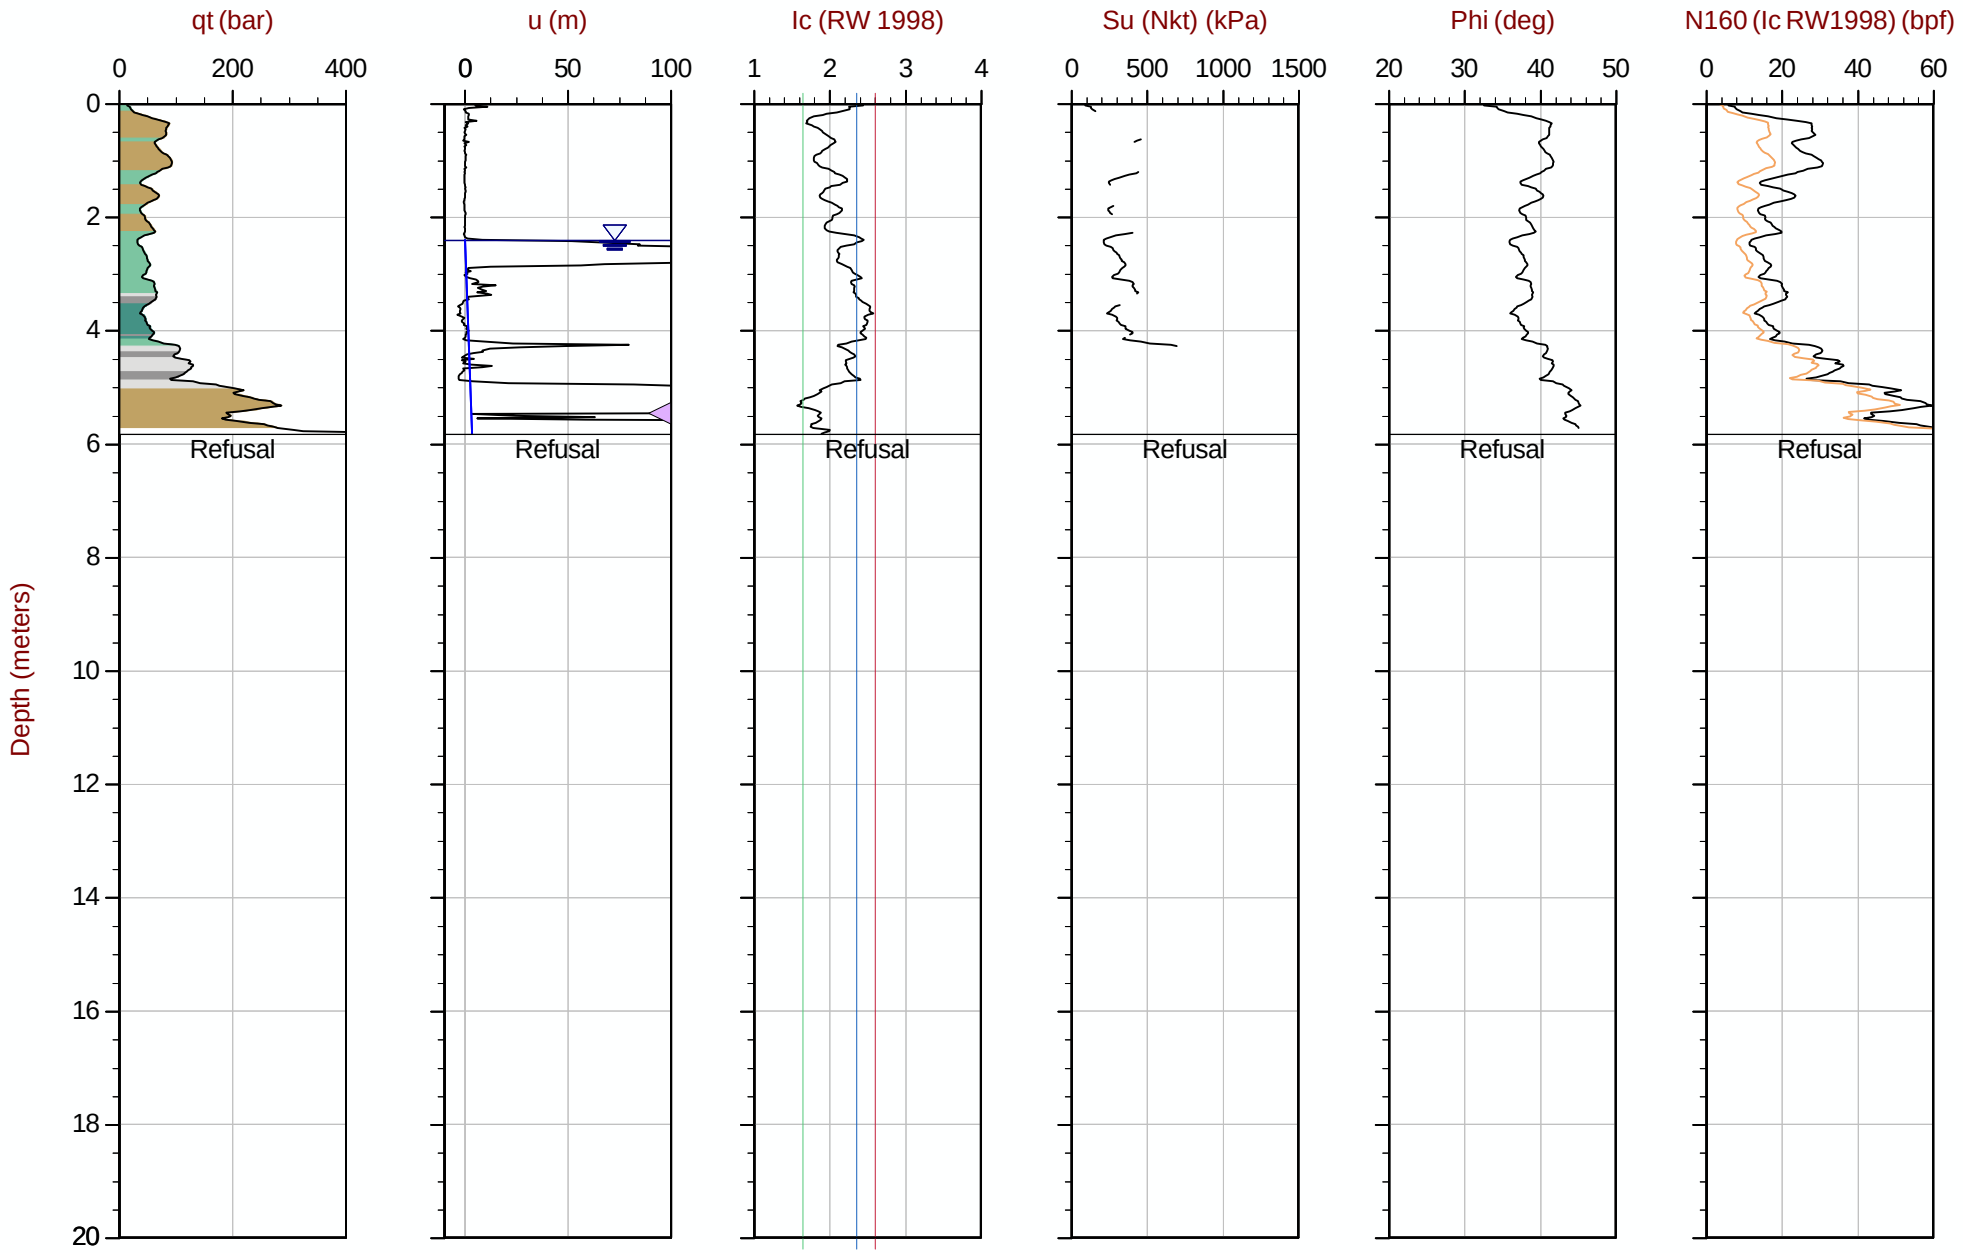

Max Depth: 5.825 m / 19.11 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT277.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610770m E: 416912m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 10:35
Site: Brooks, Alberta

Sounding: RCPT22-22CPT278
Cone: 854:T1500F15U35 Area= 15cm2

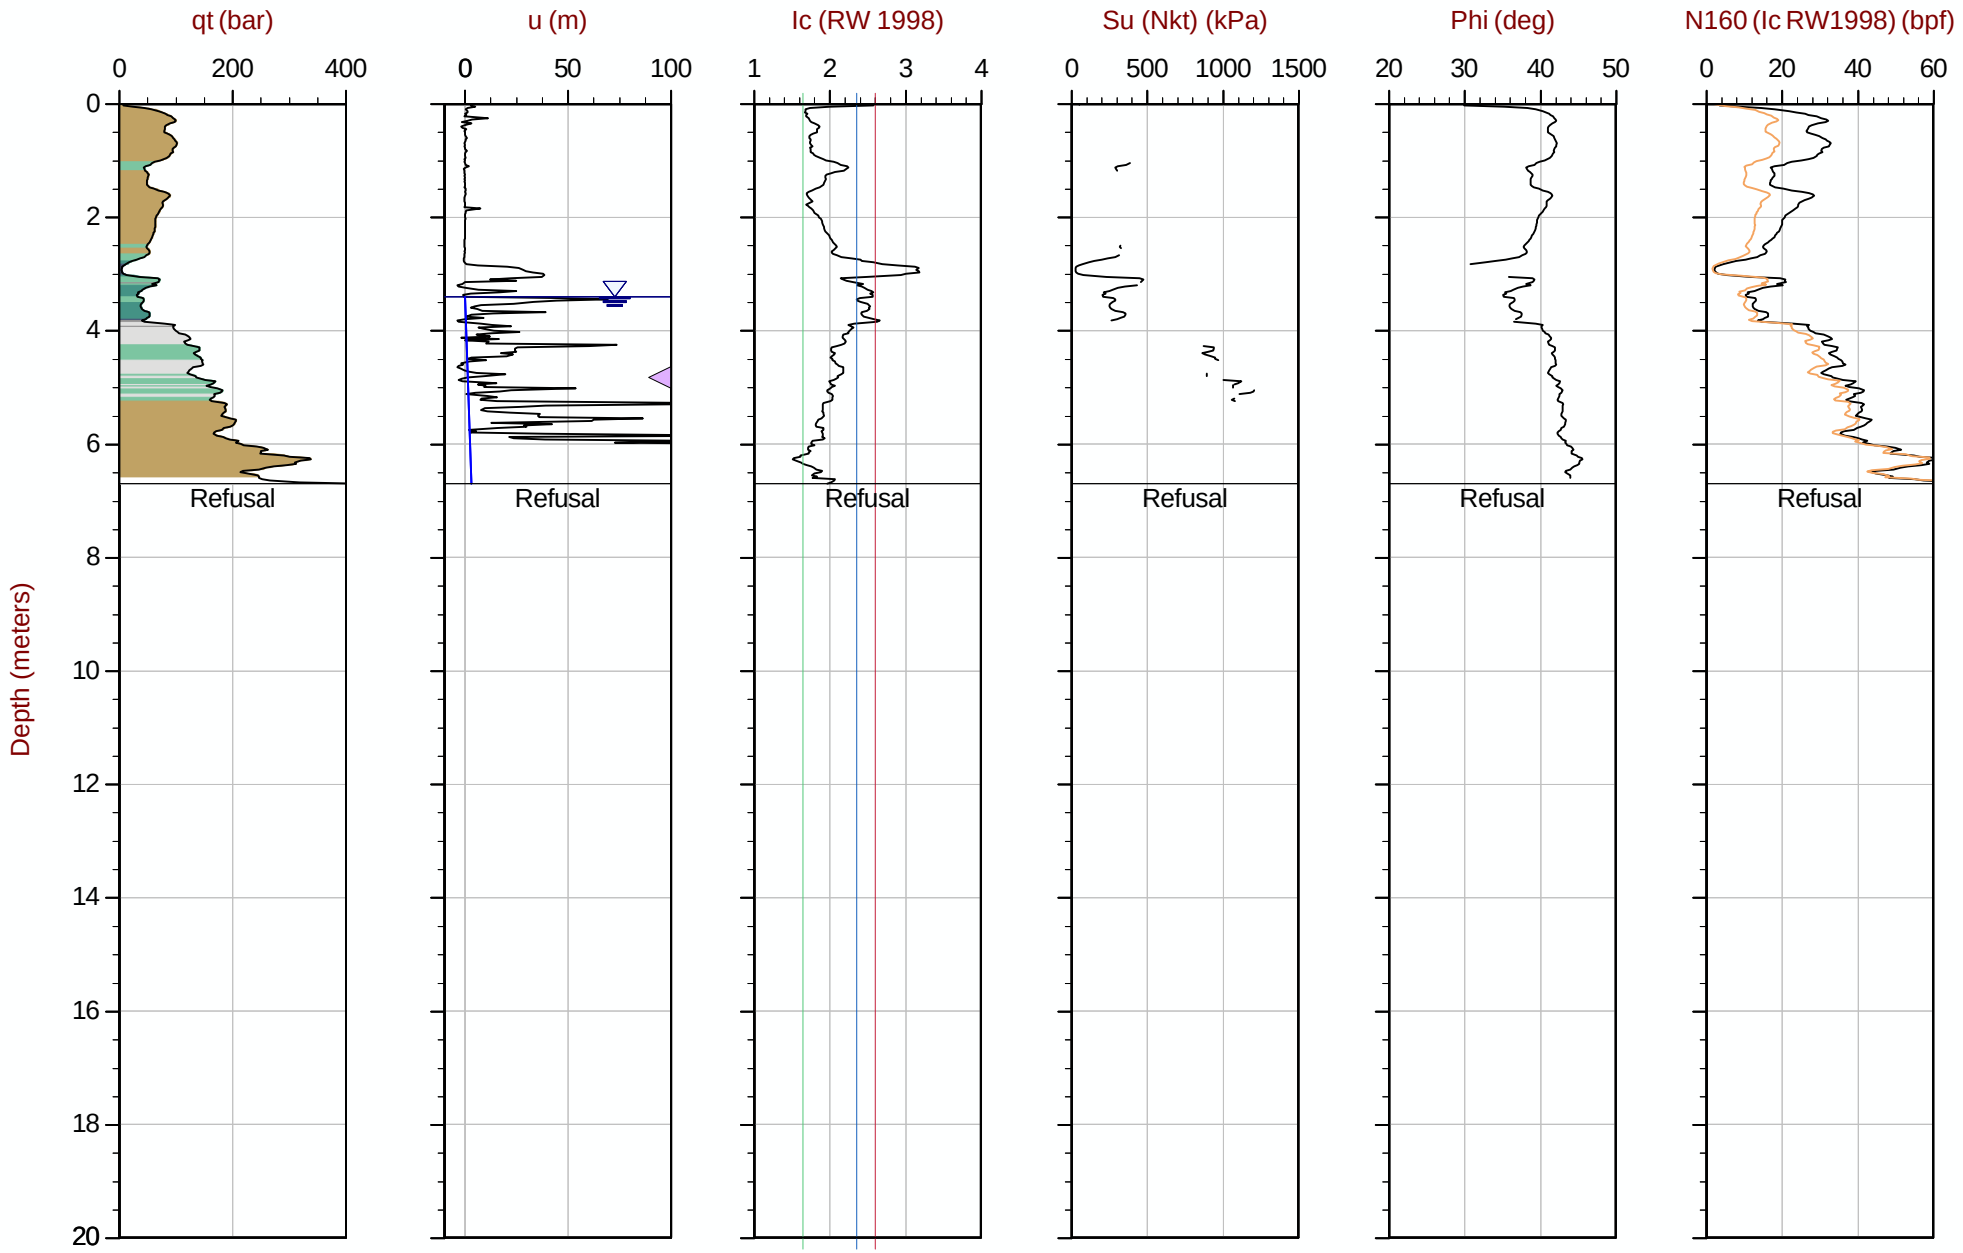

Max Depth: 6.700 m / 21.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT278.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610669m E: 416910m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 11:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT279
Cone: 854:T1500F15U35 Area= 15cm2

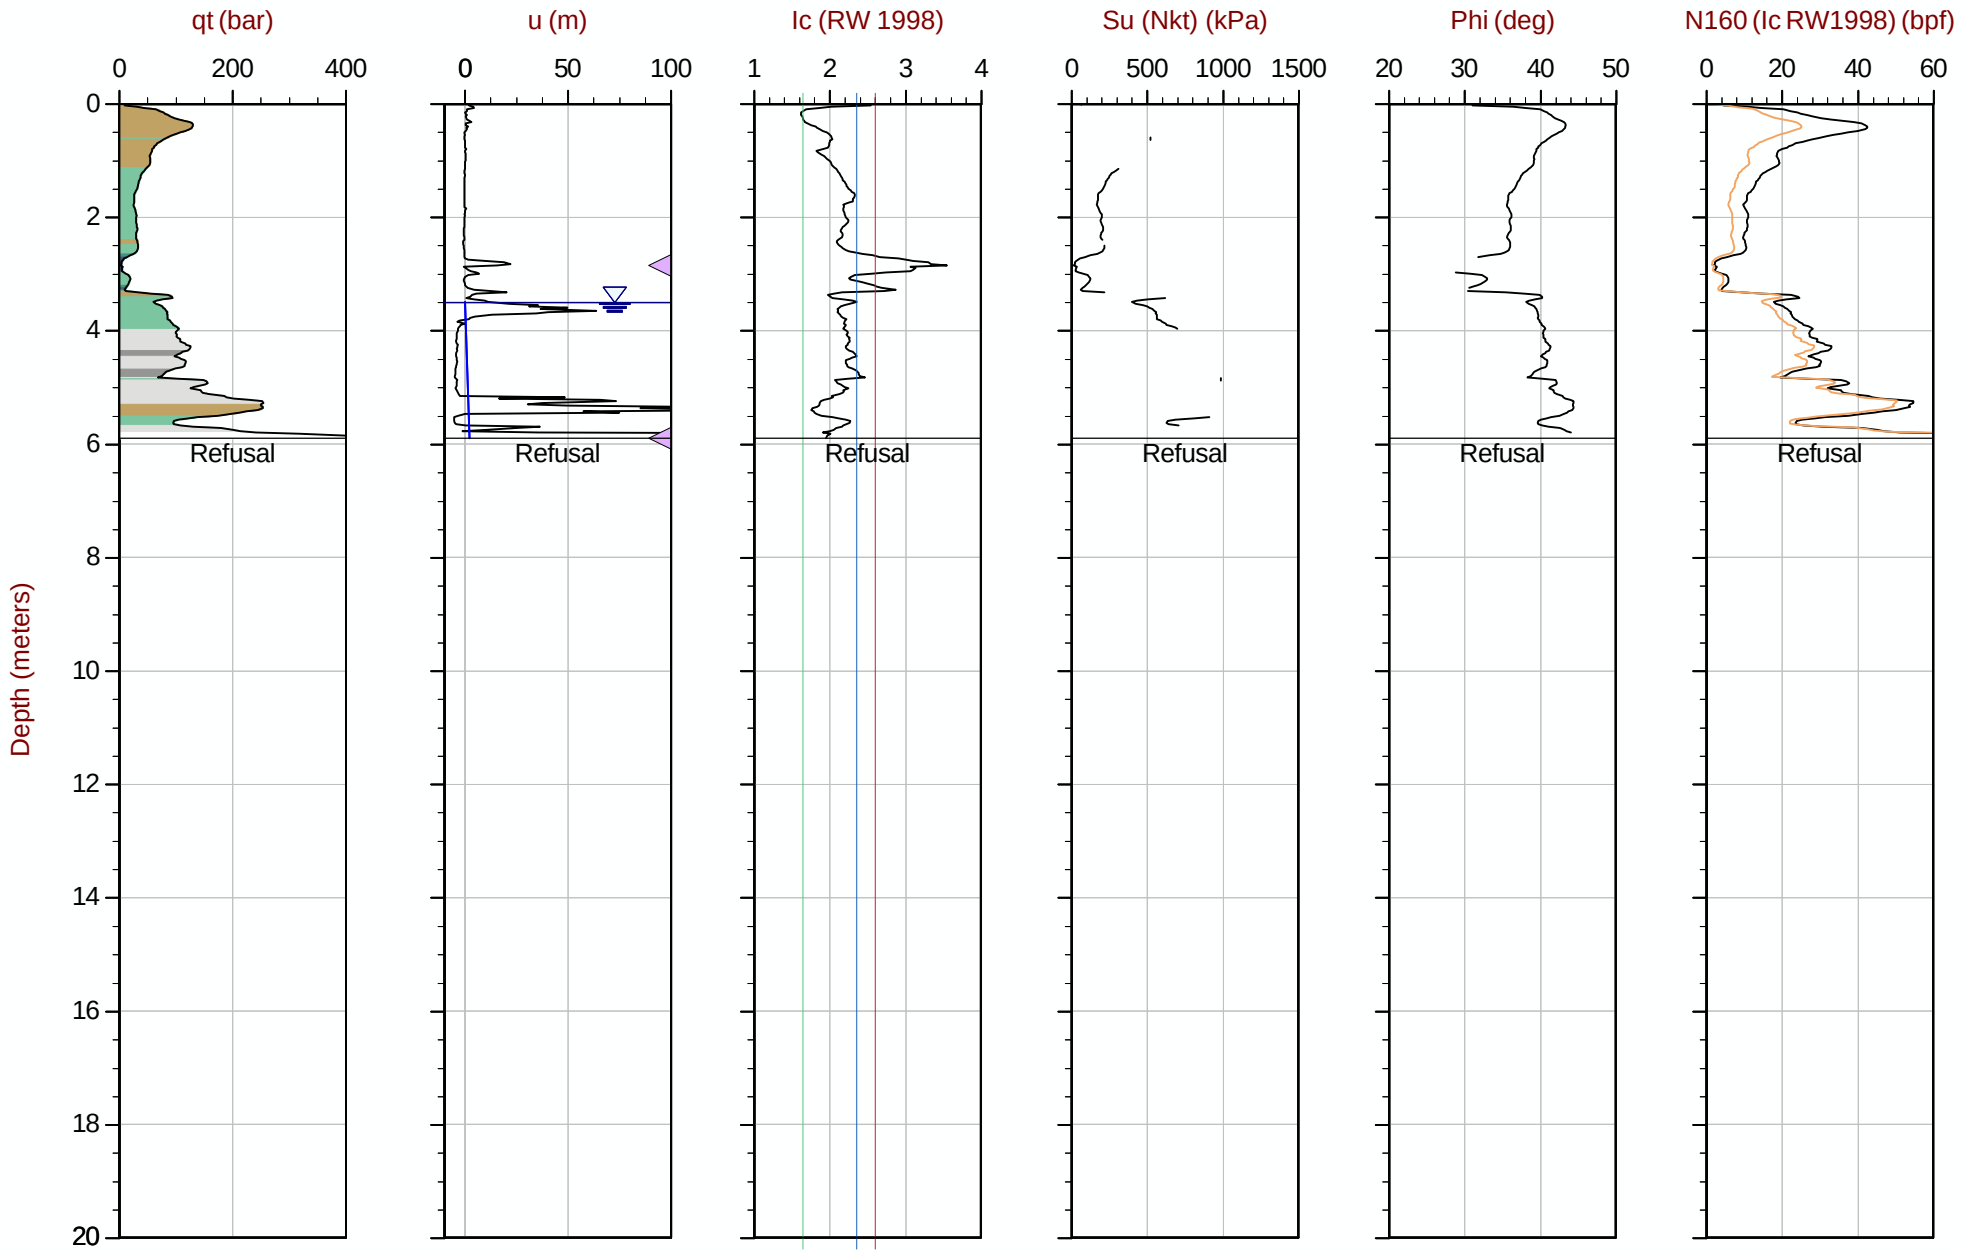

Max Depth: 5.900 m / 19.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT279.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610568m E: 416908m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 12:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT280
Cone: 854:T1500F15U35 Area= 15cm2

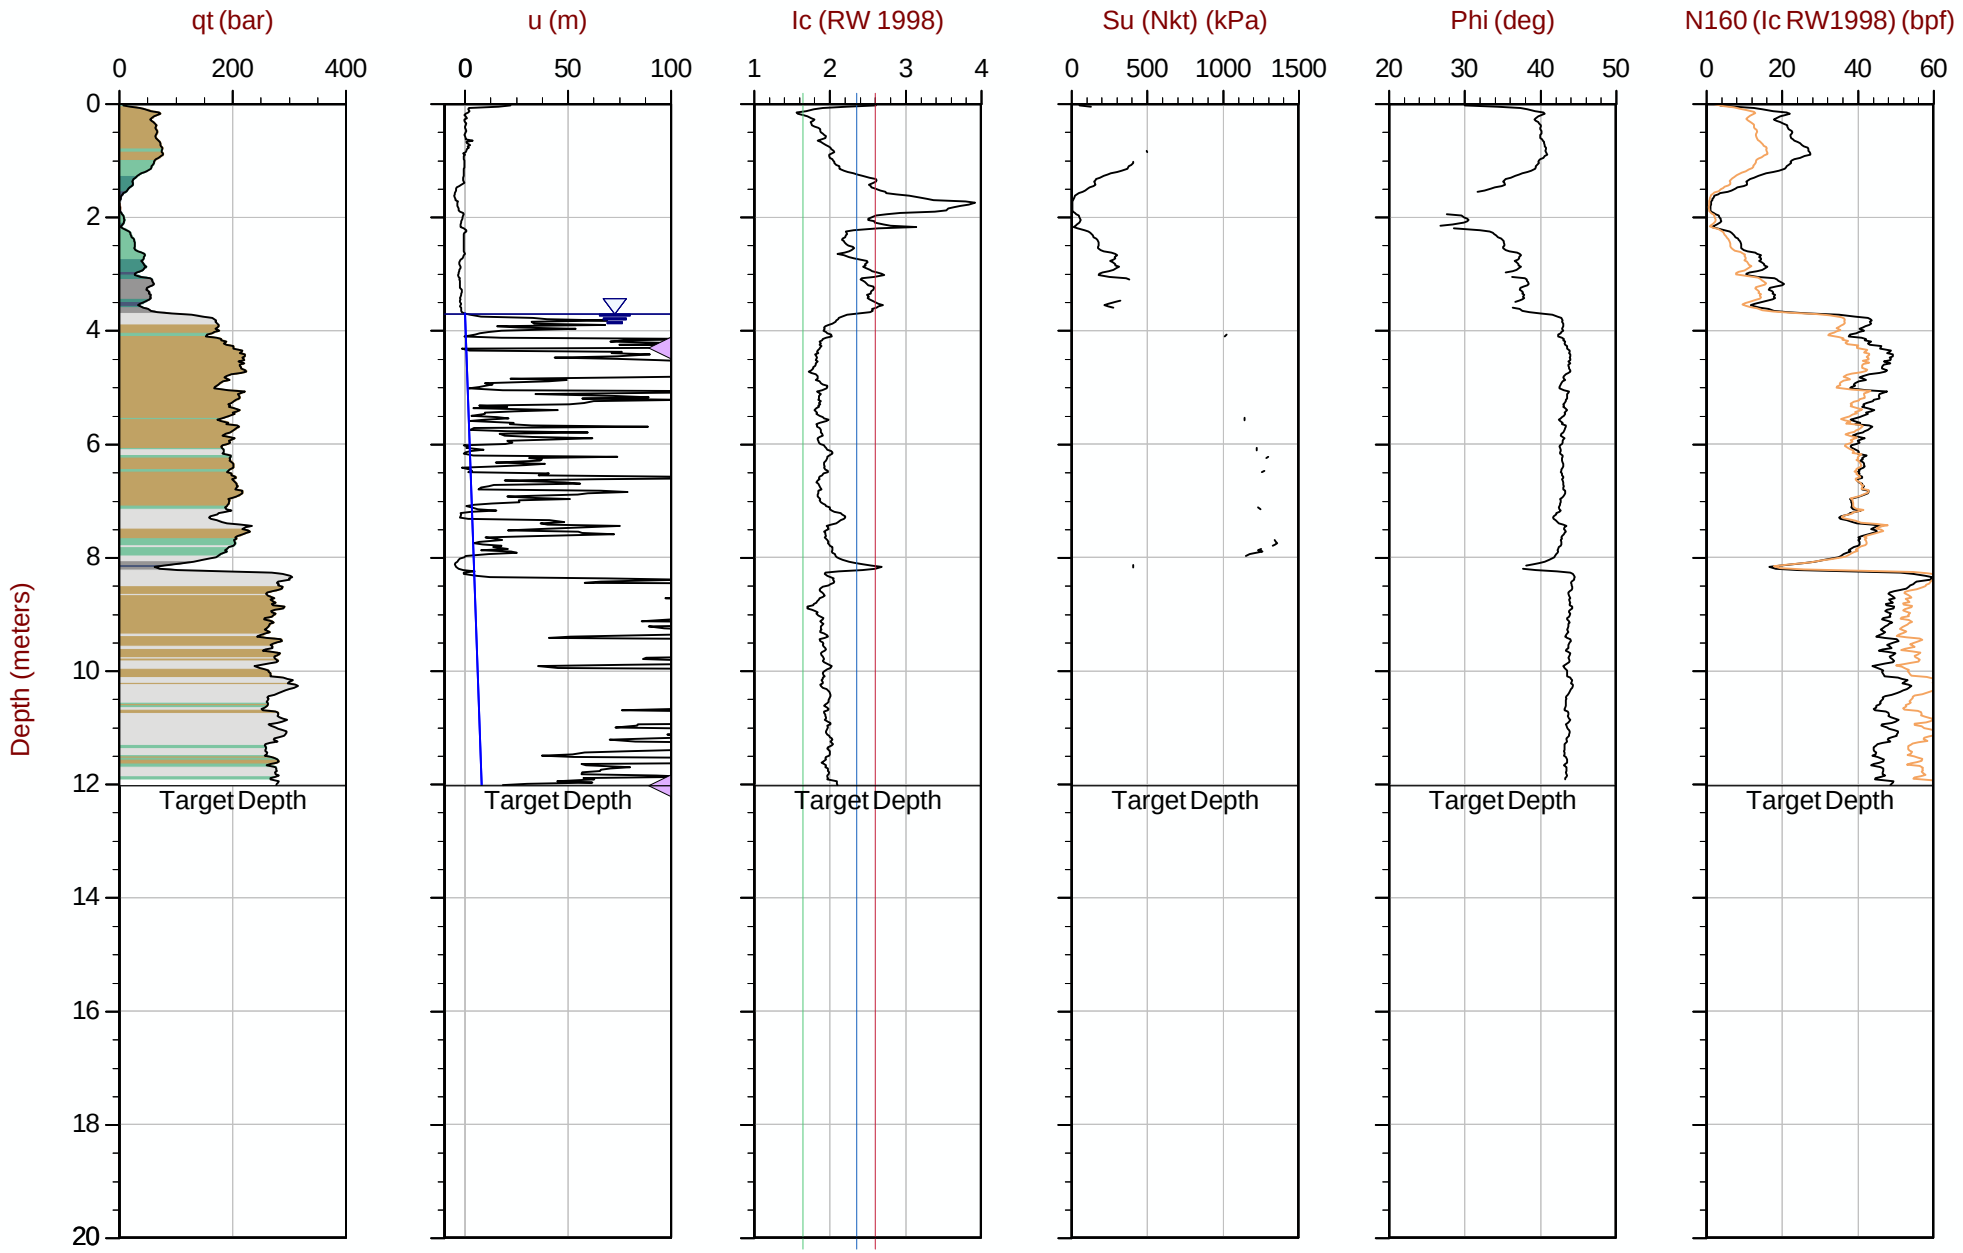

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT280.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610468m E: 416904m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 06:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT281
Cone: 854:T1500F15U35 Area= 15cm2

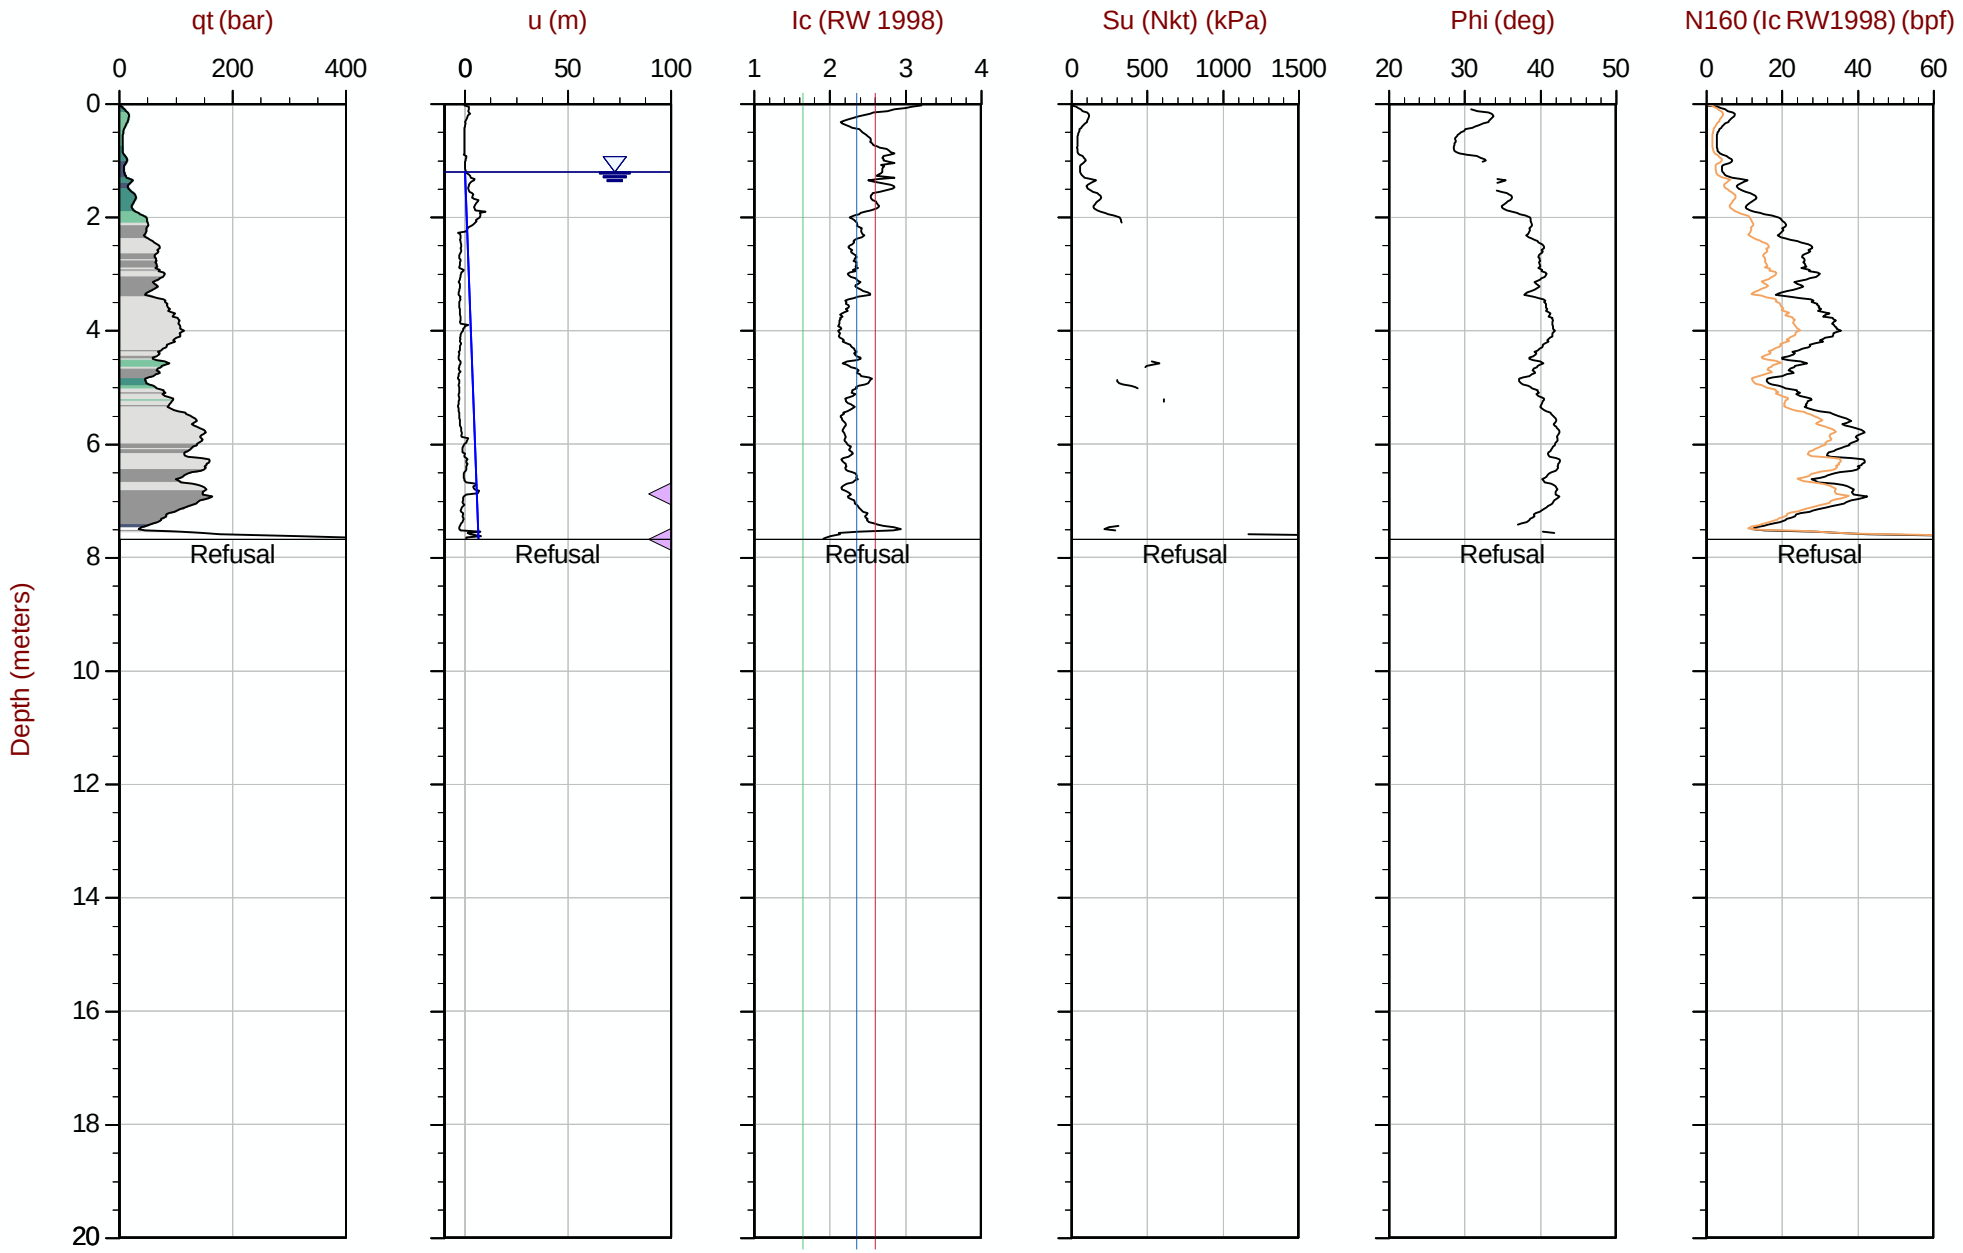

Max Depth: 7.675 m / 25.18 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT281.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610368m E: 416906m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 14:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT282
Cone: 854:T1500F15U35 Area= 15cm2

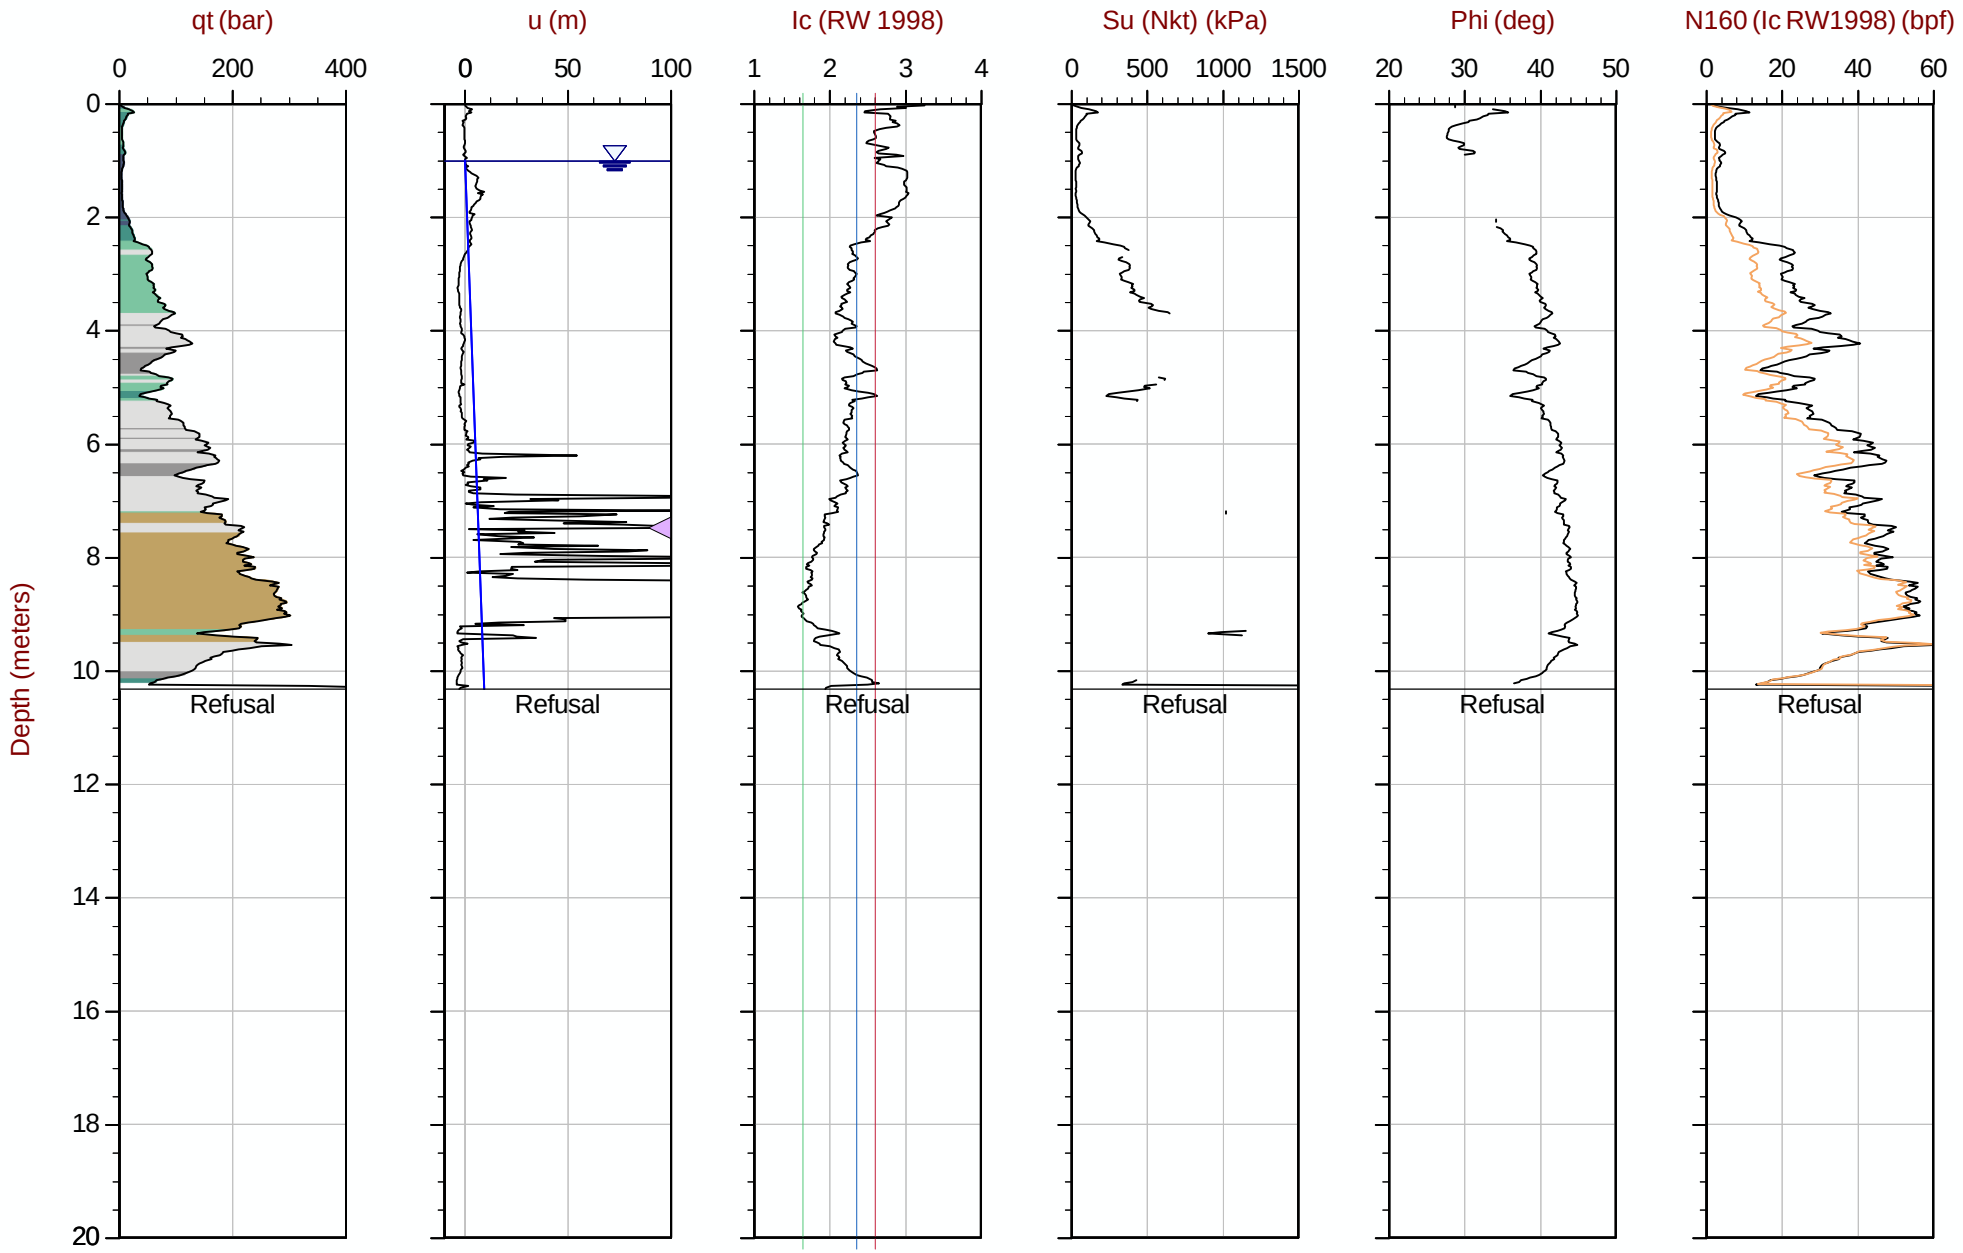

Max Depth: 10.325 m / 33.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT282.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610268m E: 416901m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-01 15:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT283
Cone: 854:T1500F15U35 Area= 15cm2

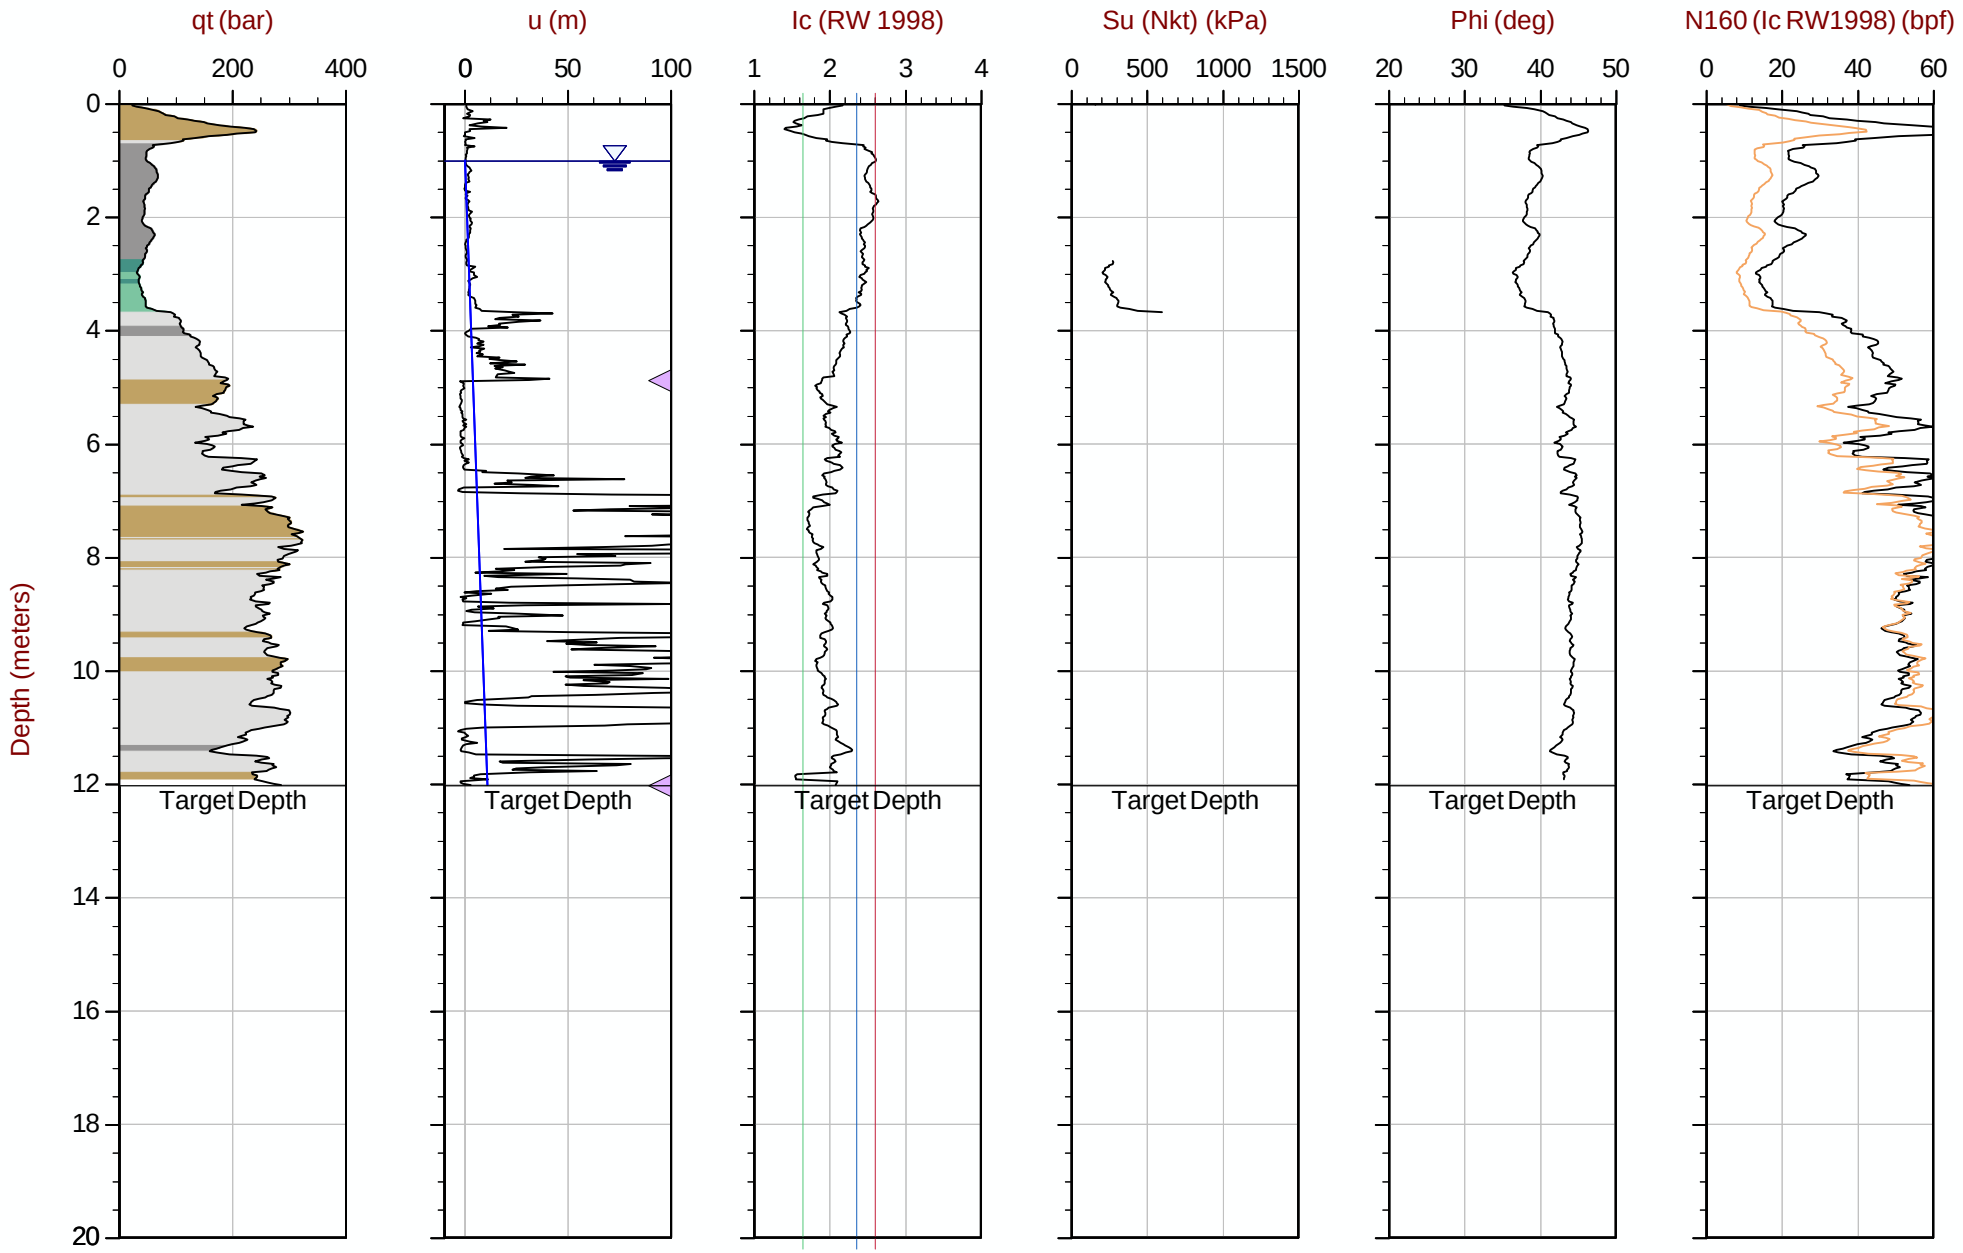

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT283.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610168m E: 416903m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 10:02
Site: Brooks, Alberta

Sounding: RCPT22-22CPT284
Cone: 854:T1500F15U35 Area= 15cm2

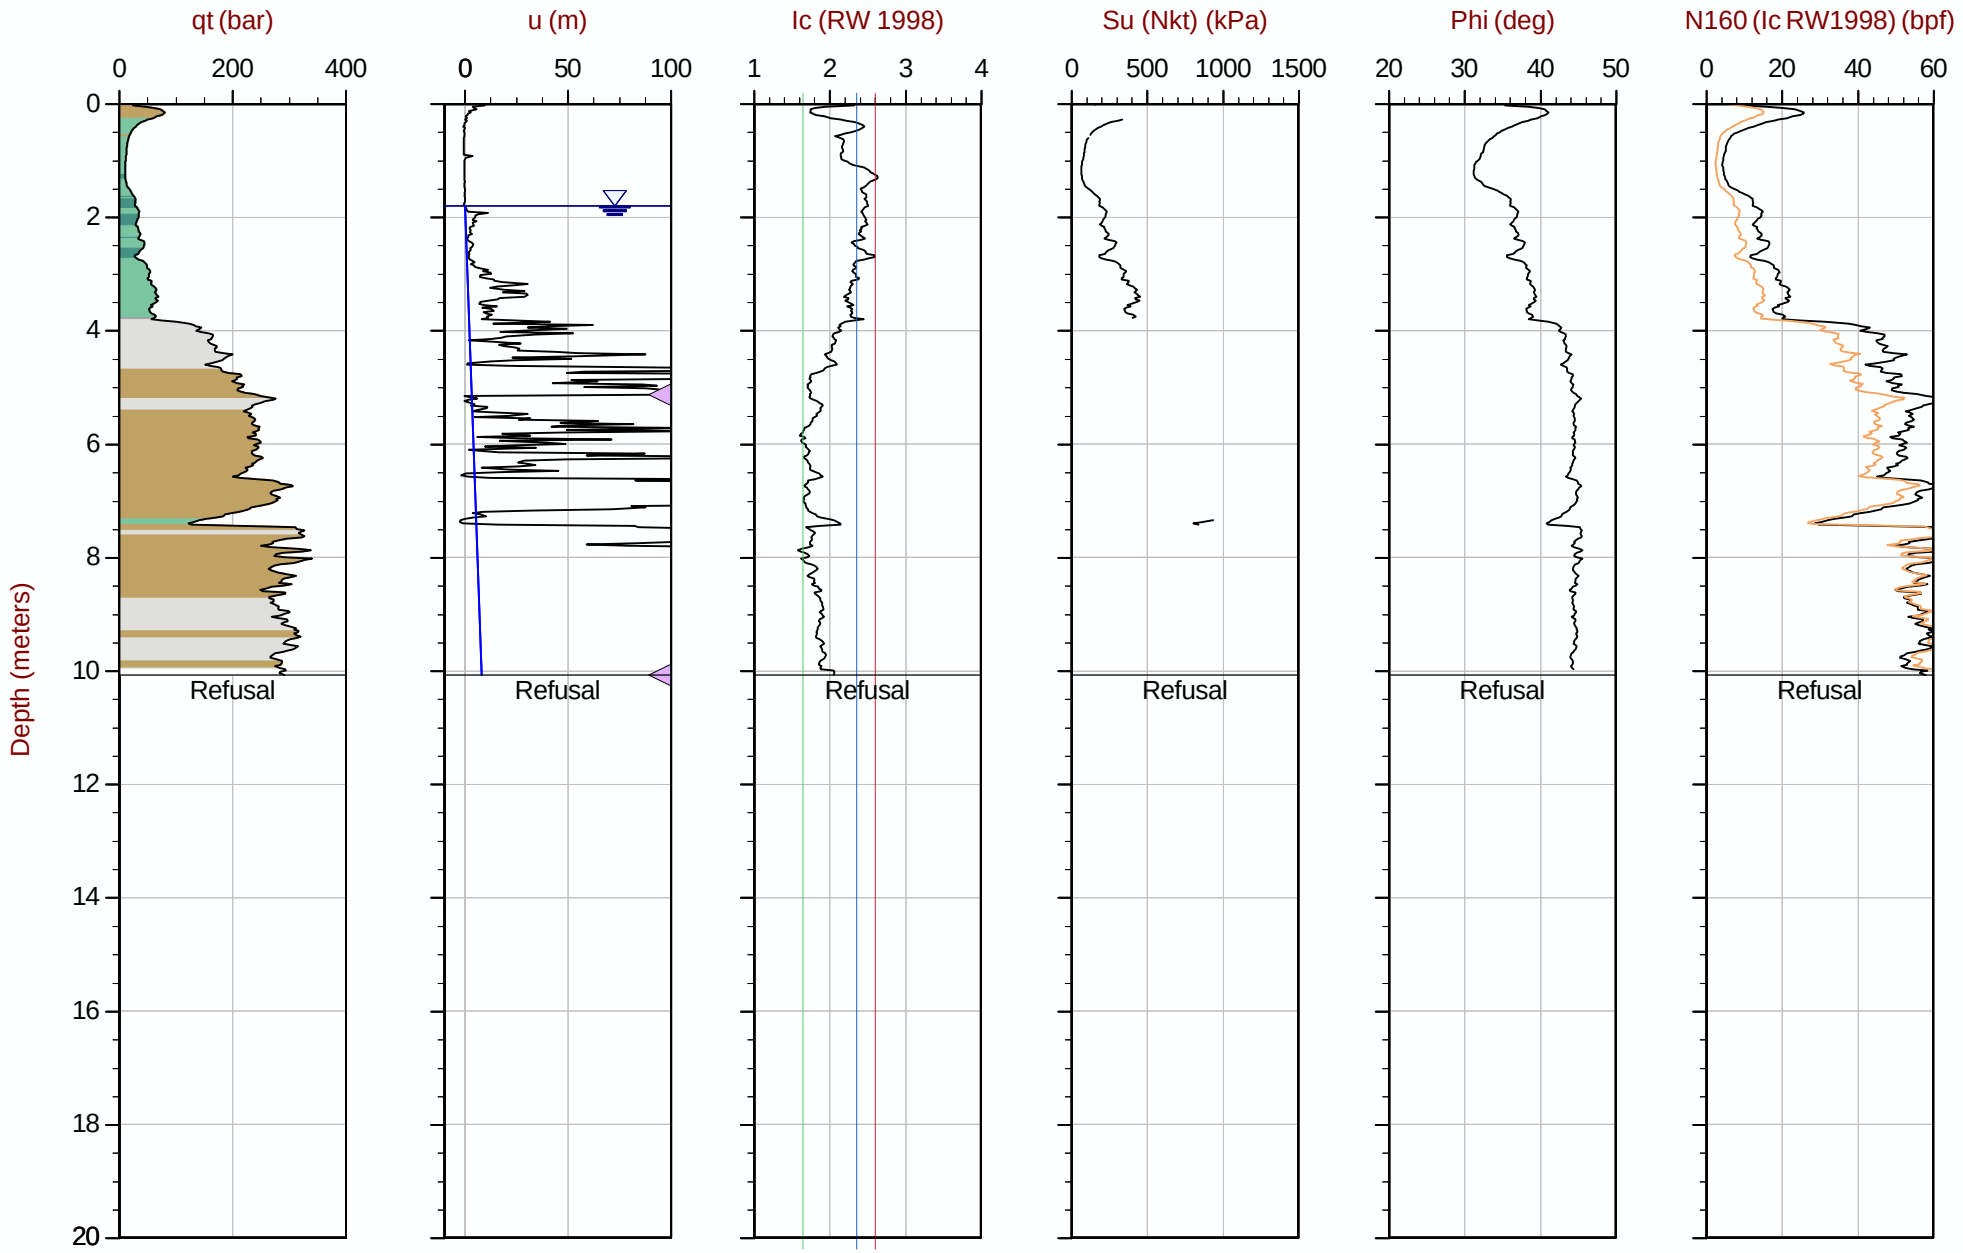

Max Depth: 10.075 m / 33.05 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT284.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610070m E: 416898m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT285
Cone: 854:T1500F15U35 Area= 15cm2

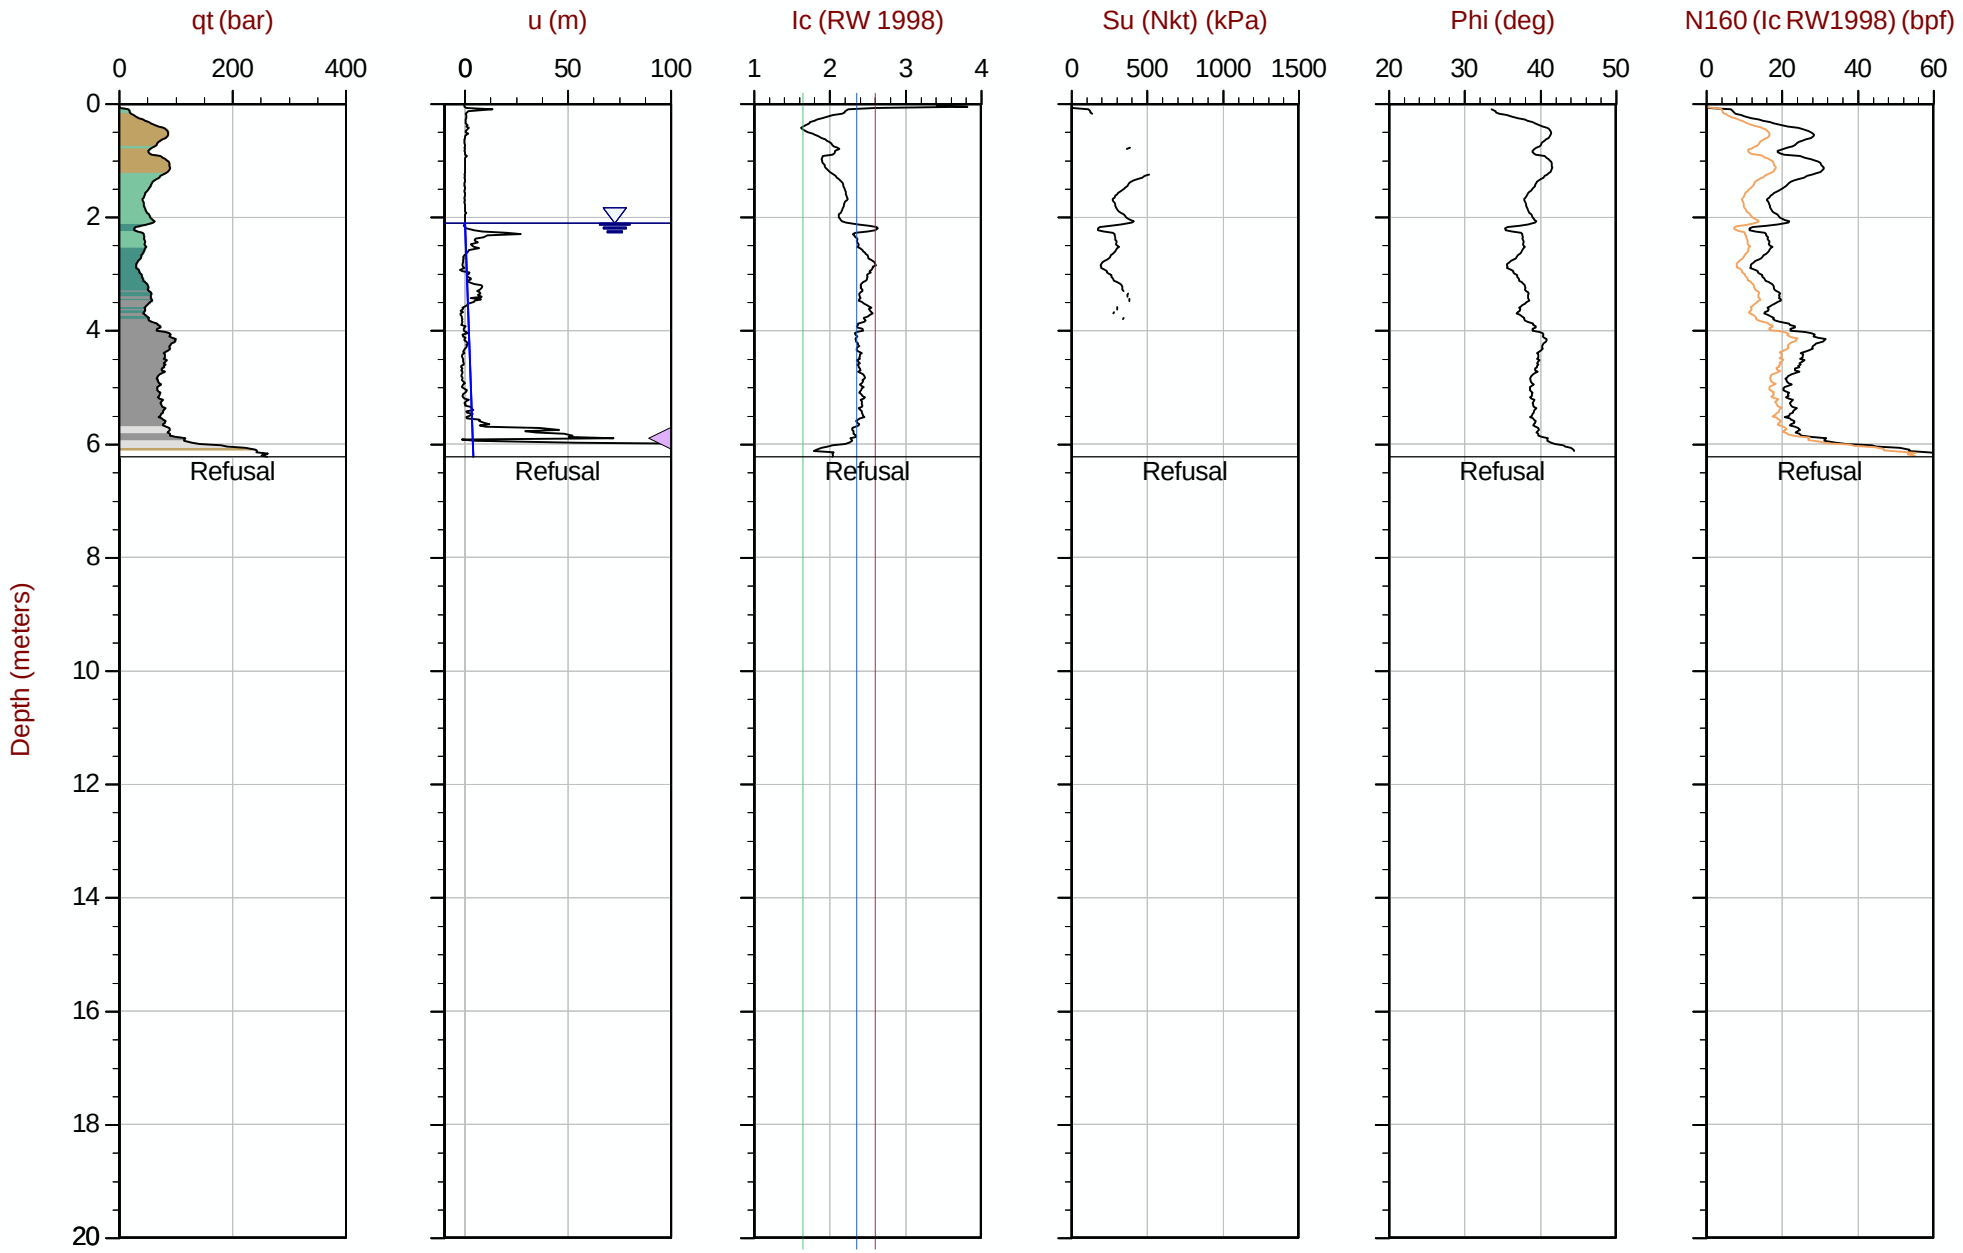

Max Depth: 6.225 m / 20.42 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT285.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609970m E: 416893m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 09:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT286
Cone: 854:T1500F15U35 Area= 15cm2

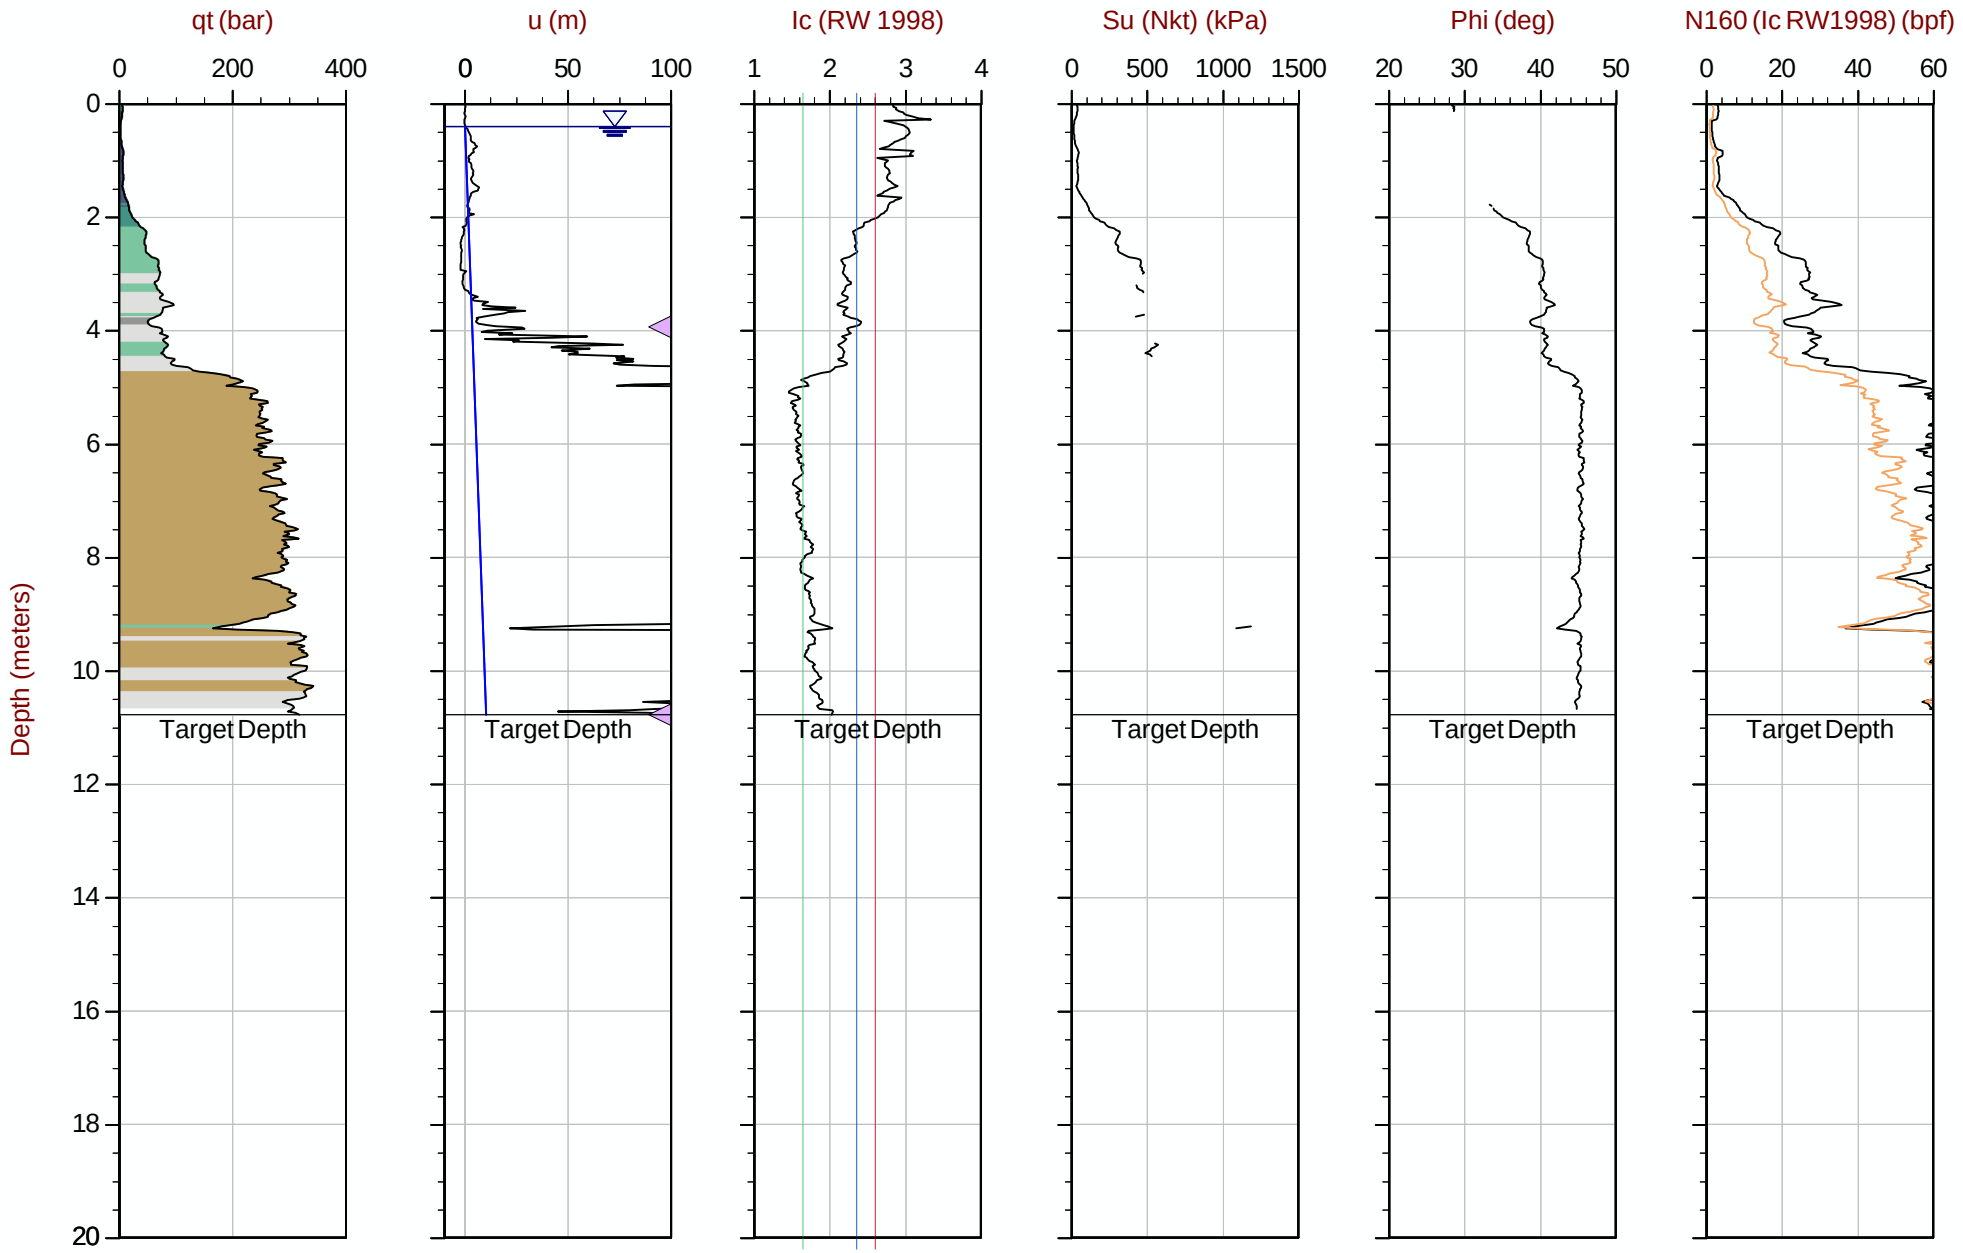

Max Depth: 10.775 m / 35.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT286.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609870m E: 416898m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 12:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT287
Cone: 854:T1500F15U35 Area= 15cm2

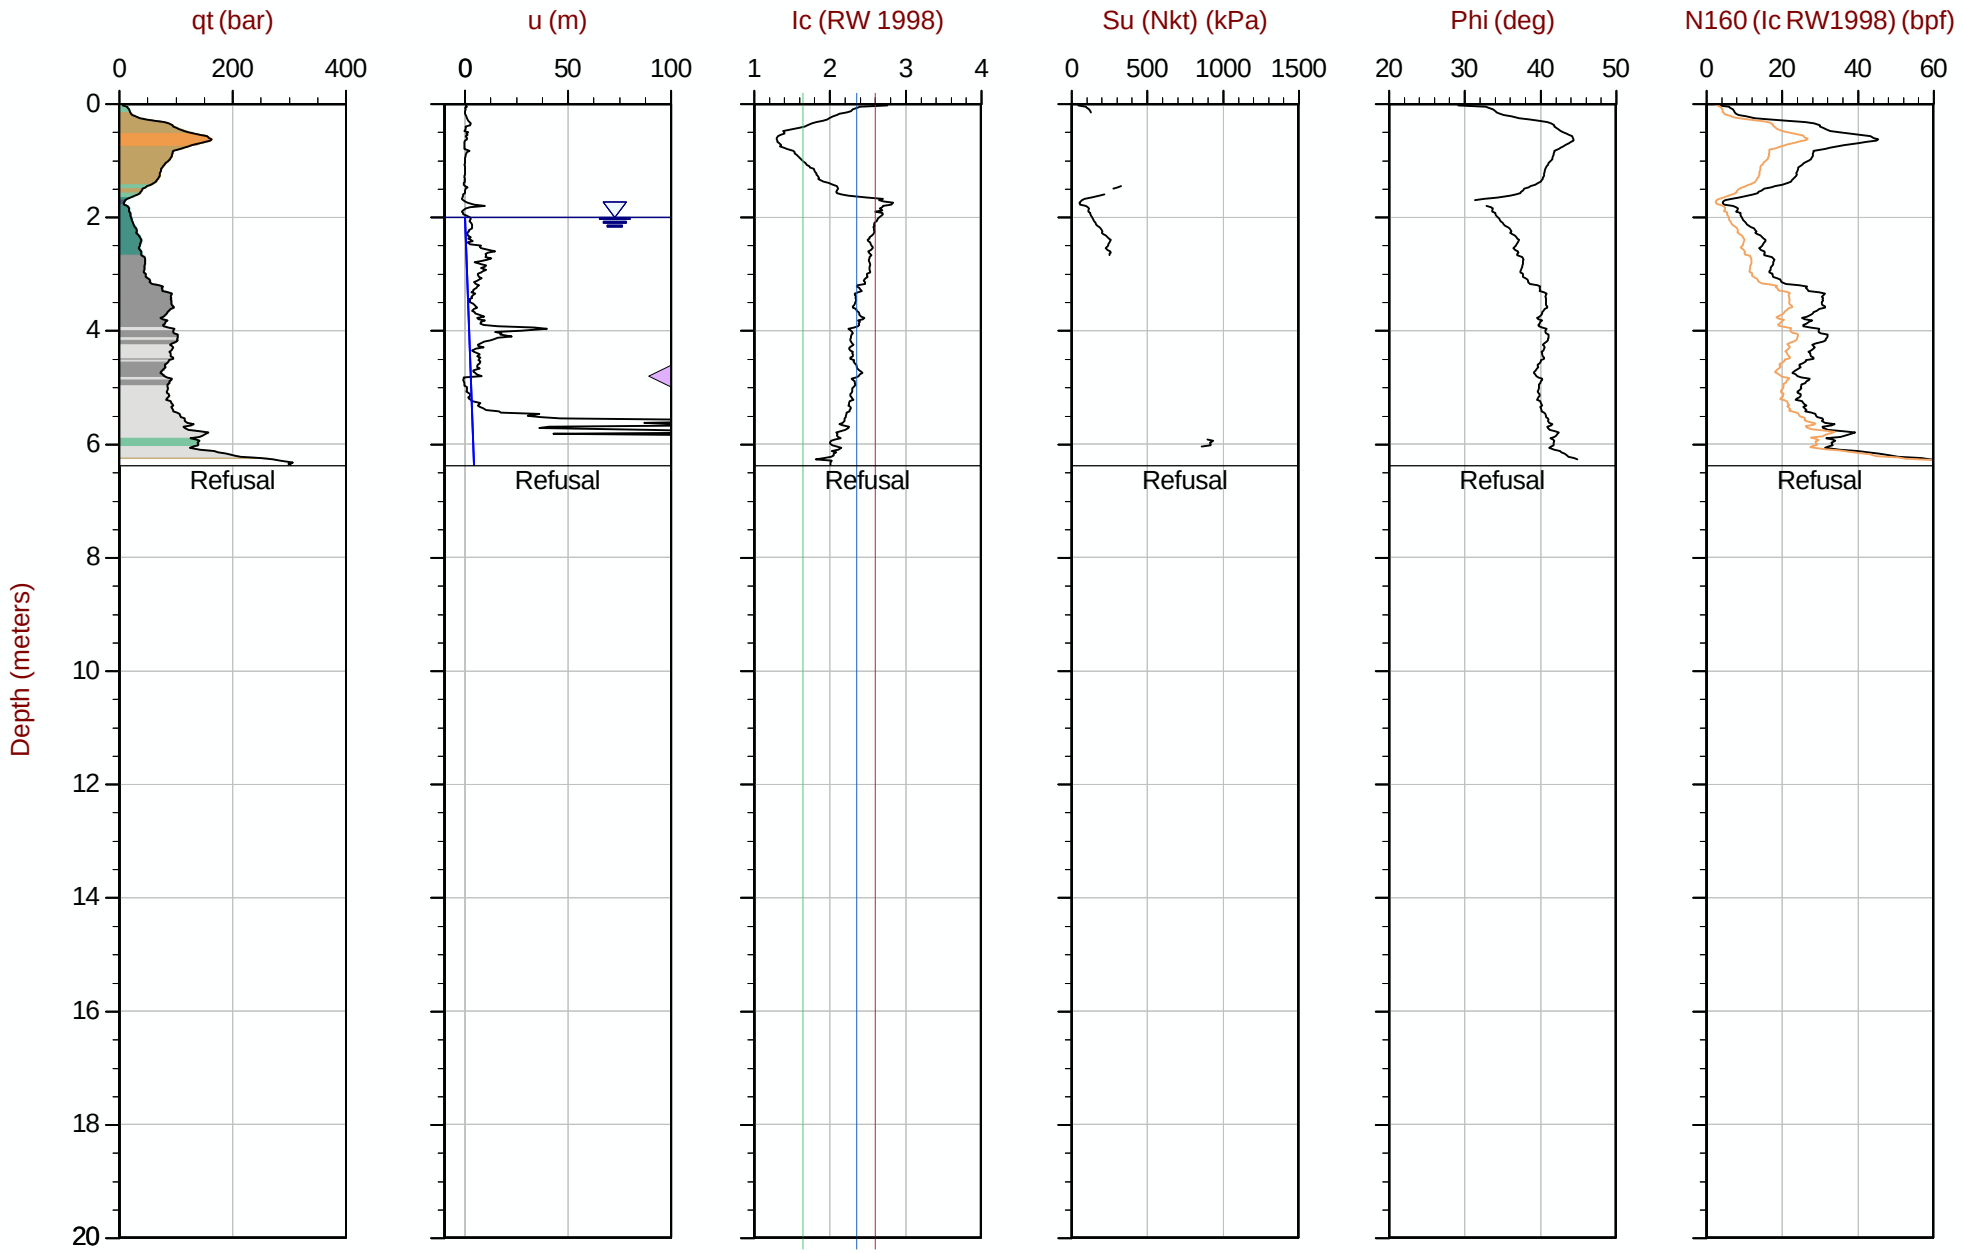

Max Depth: 6.375 m / 20.92 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22_22CPT287.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609769m E: 416895m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 14:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT288
Cone: 854:T1500F15U35 Area= 15cm2

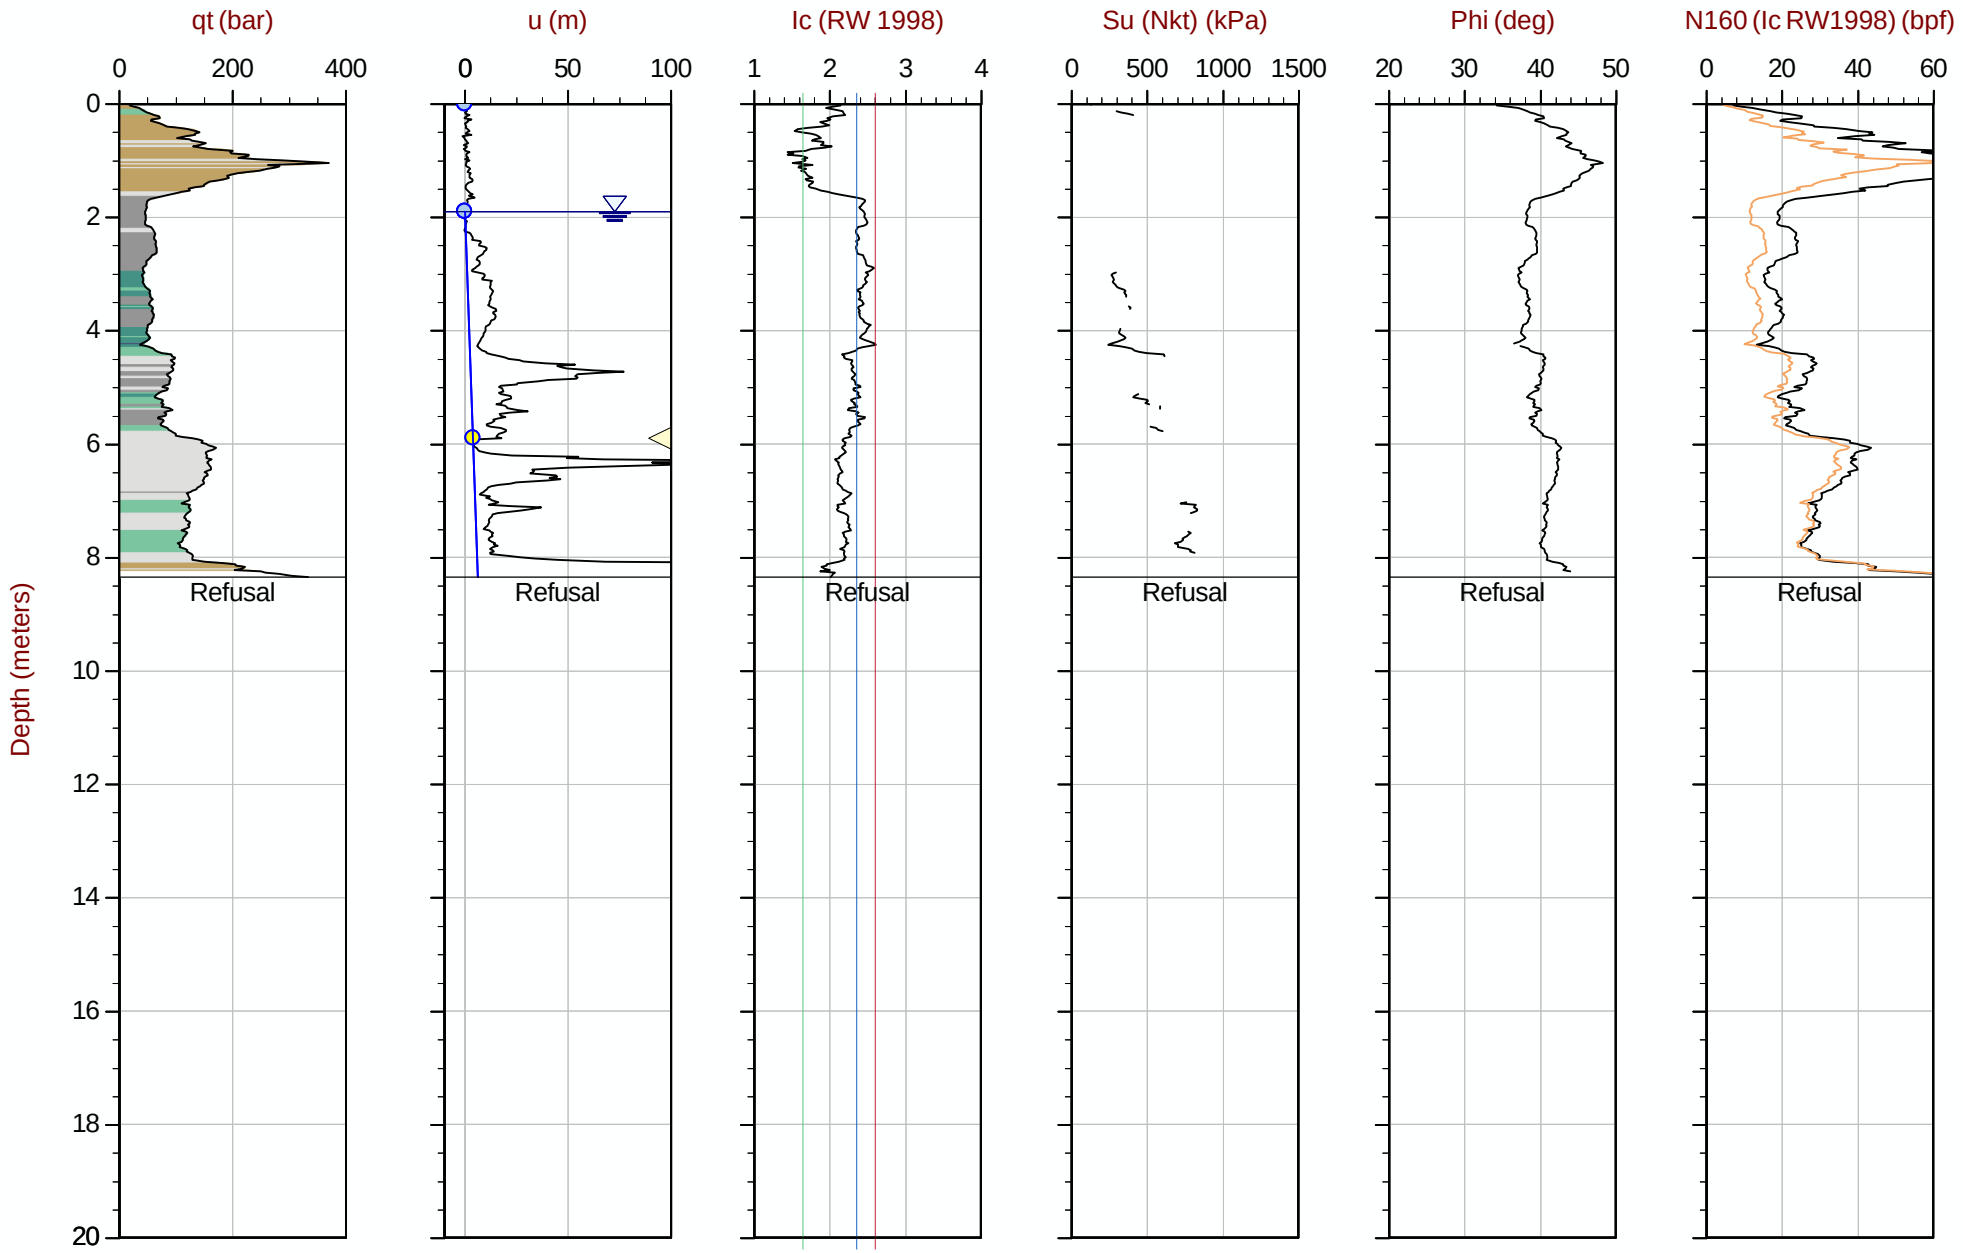

Max Depth: 8.350 m / 27.39 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT288.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609655m E: 416872m Elev: 768.551m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 08:18
Site: Brooks, Alberta

Sounding: RCPT22-22CPT300
Cone: 854:T1500F15U35 Area= 15cm2

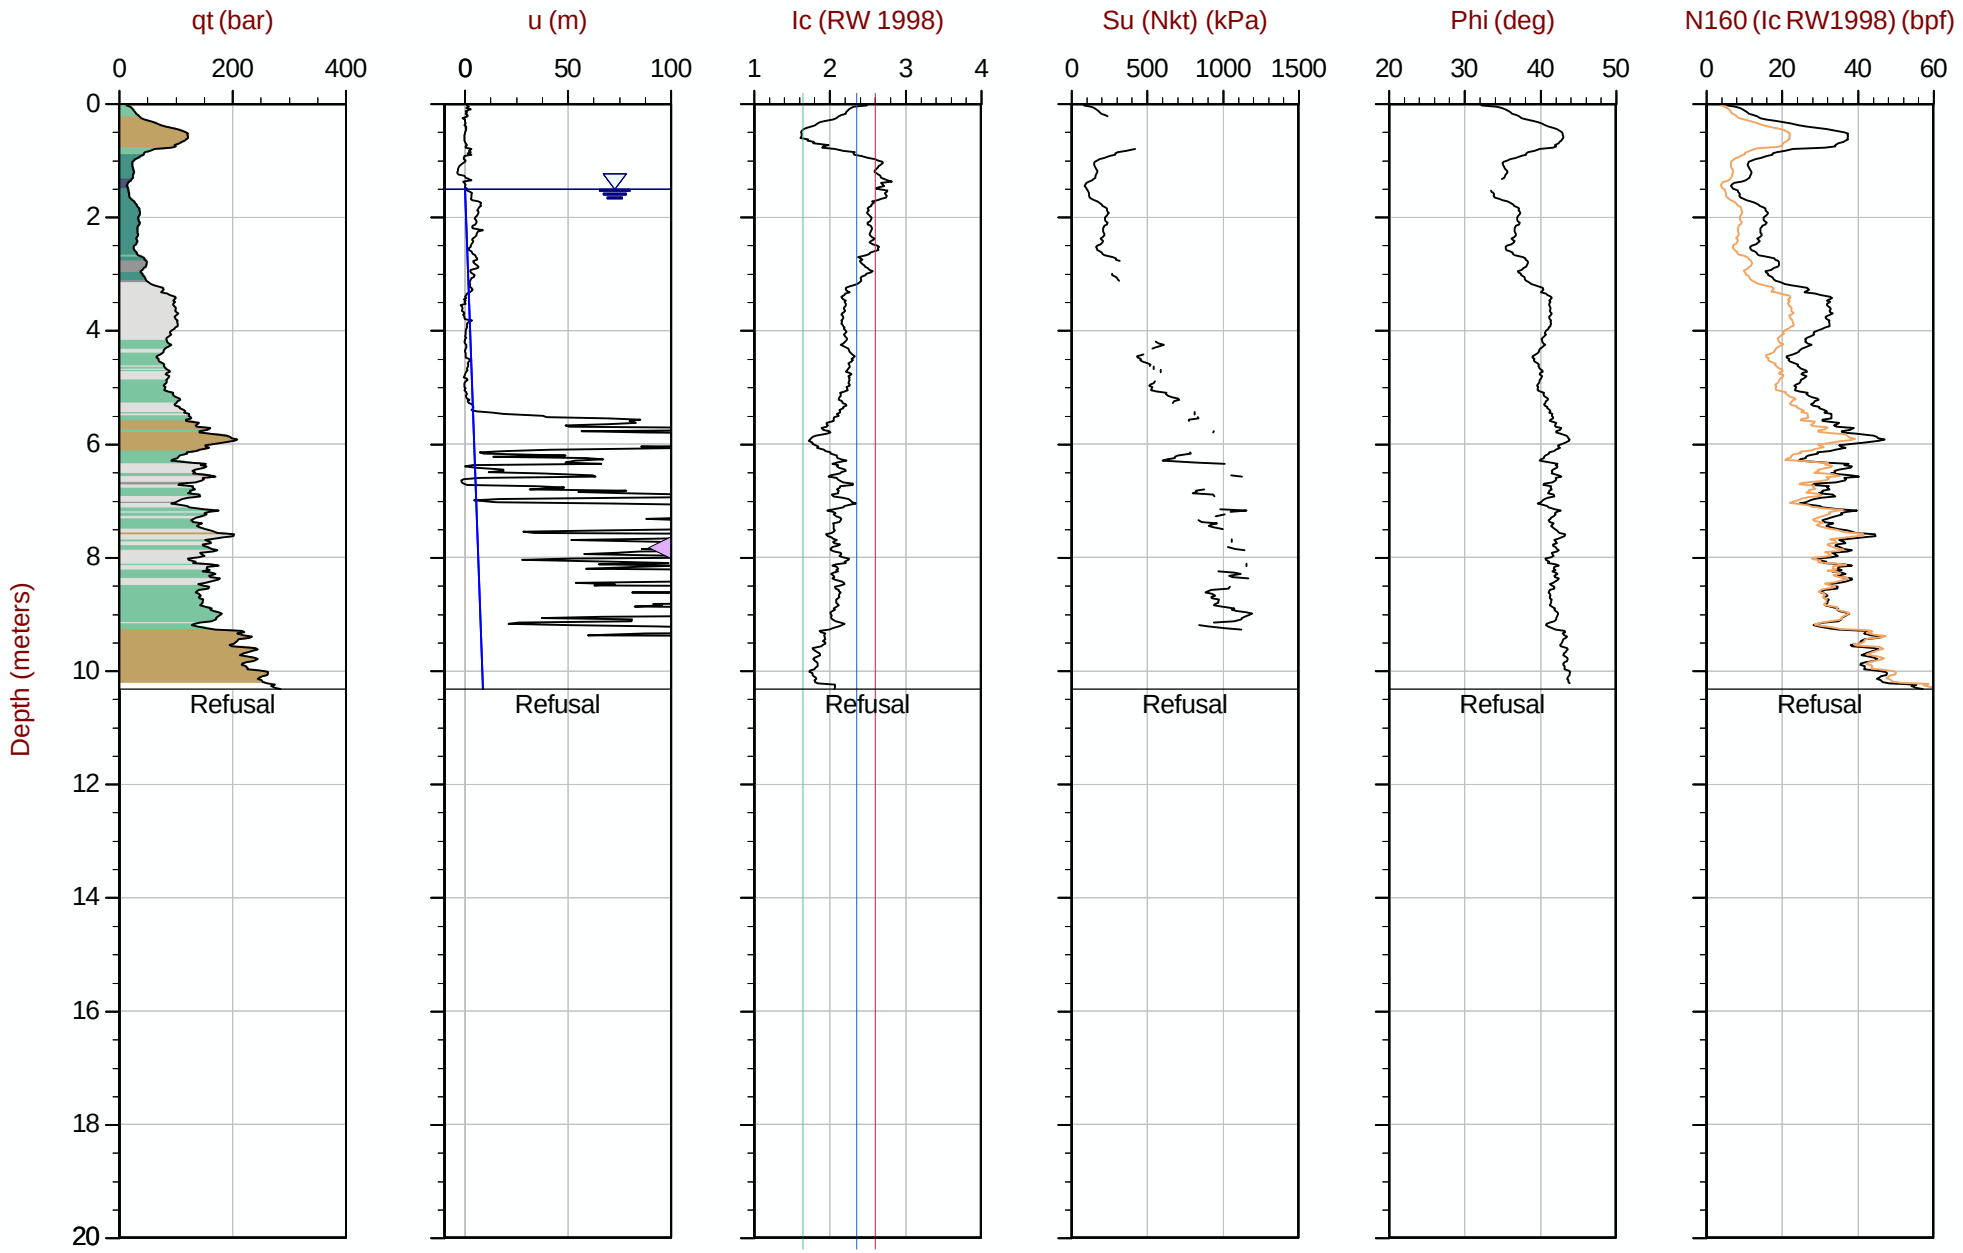

Max Depth: 10.325 m / 33.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT300.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609541m E: 416733m Elev: 768.186m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 10:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT301
Cone: 854:T1500F15U35 Area= 15cm2

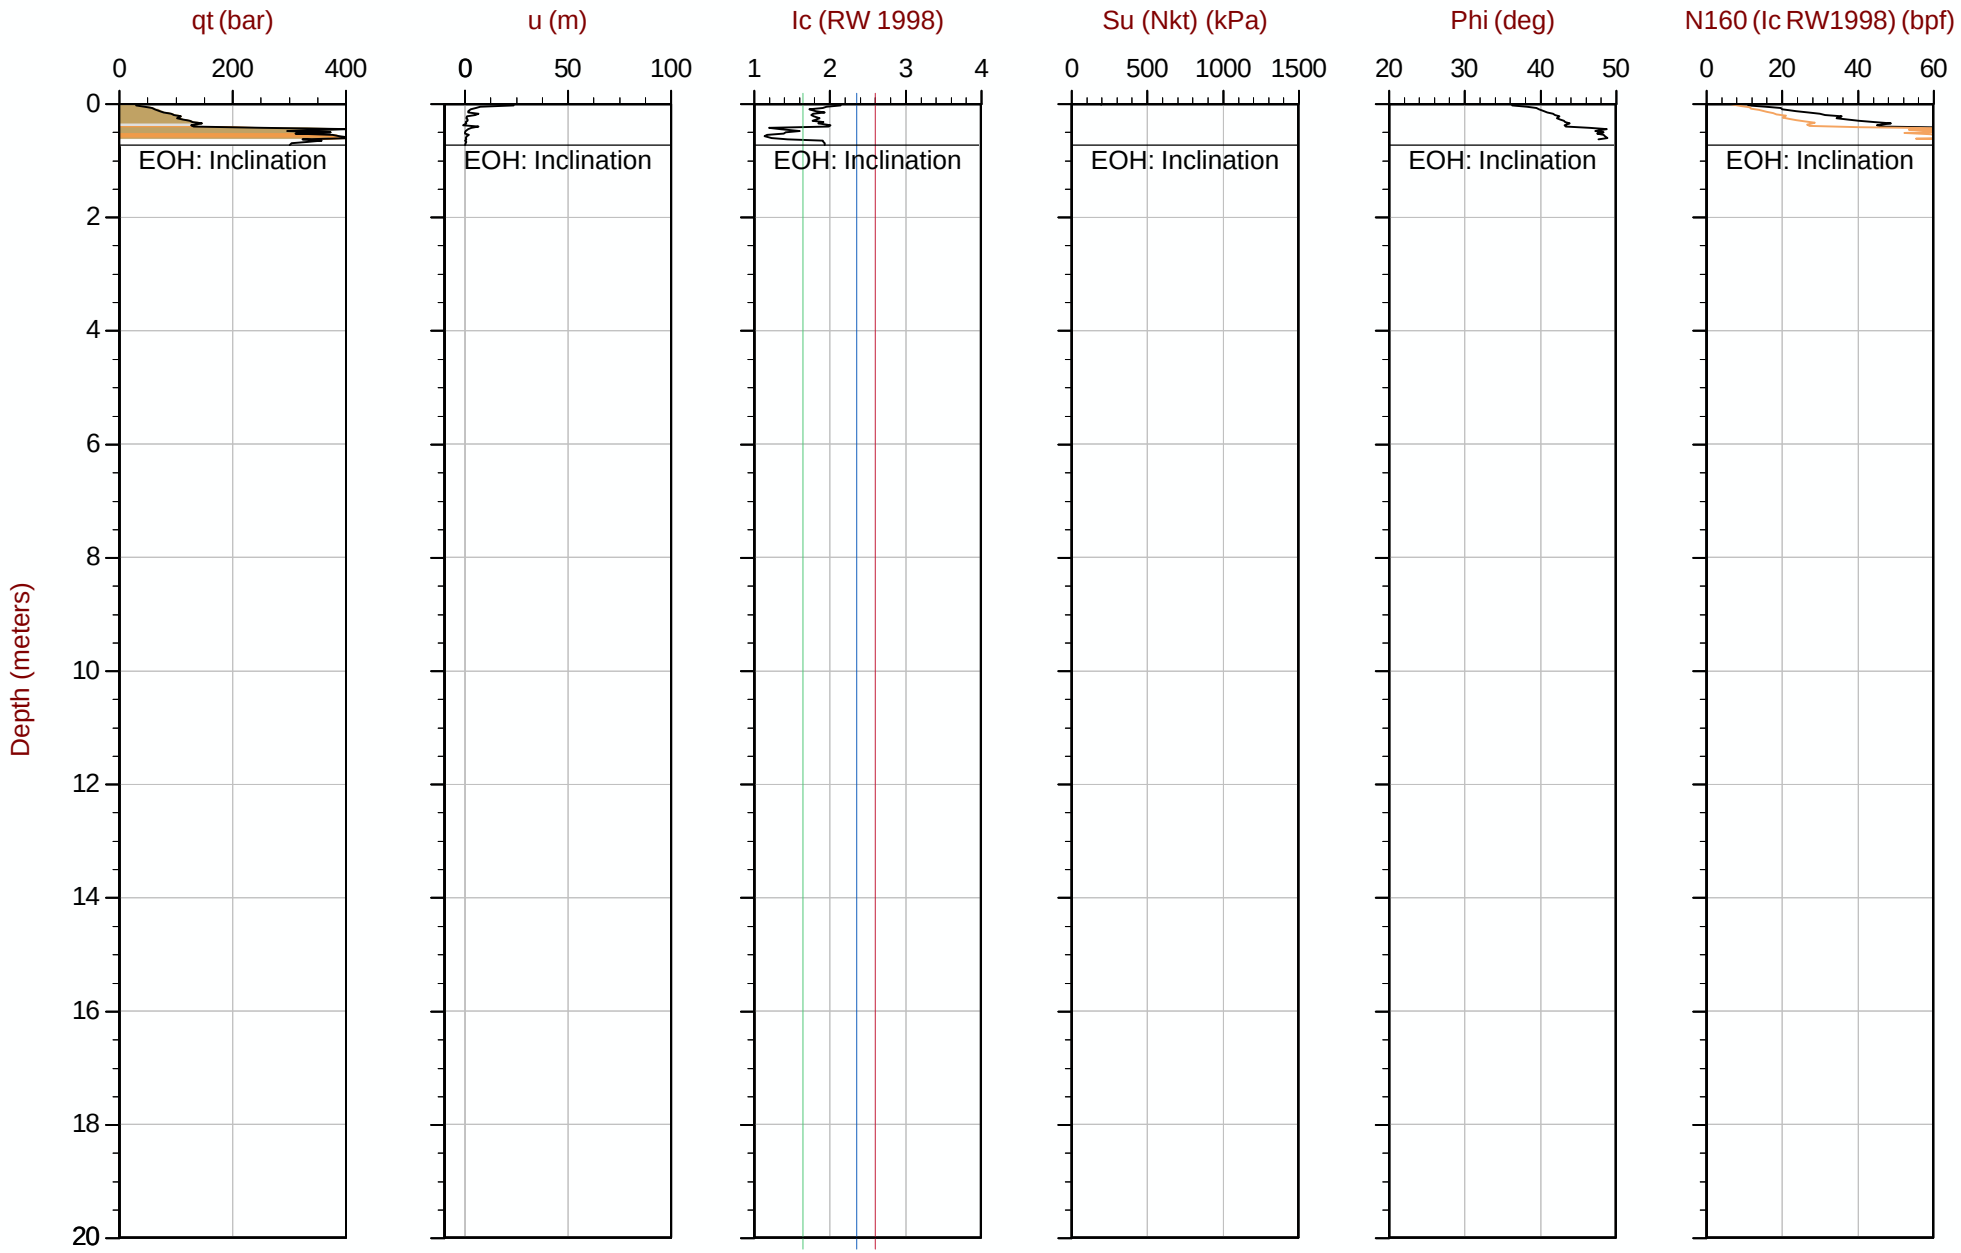

Max Depth: 0.725 m / 2.38 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT301.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609514m E: 416692m Elev: 769.445m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 10:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT301B
Cone: 854:T1500F15U35 Area= 15cm2

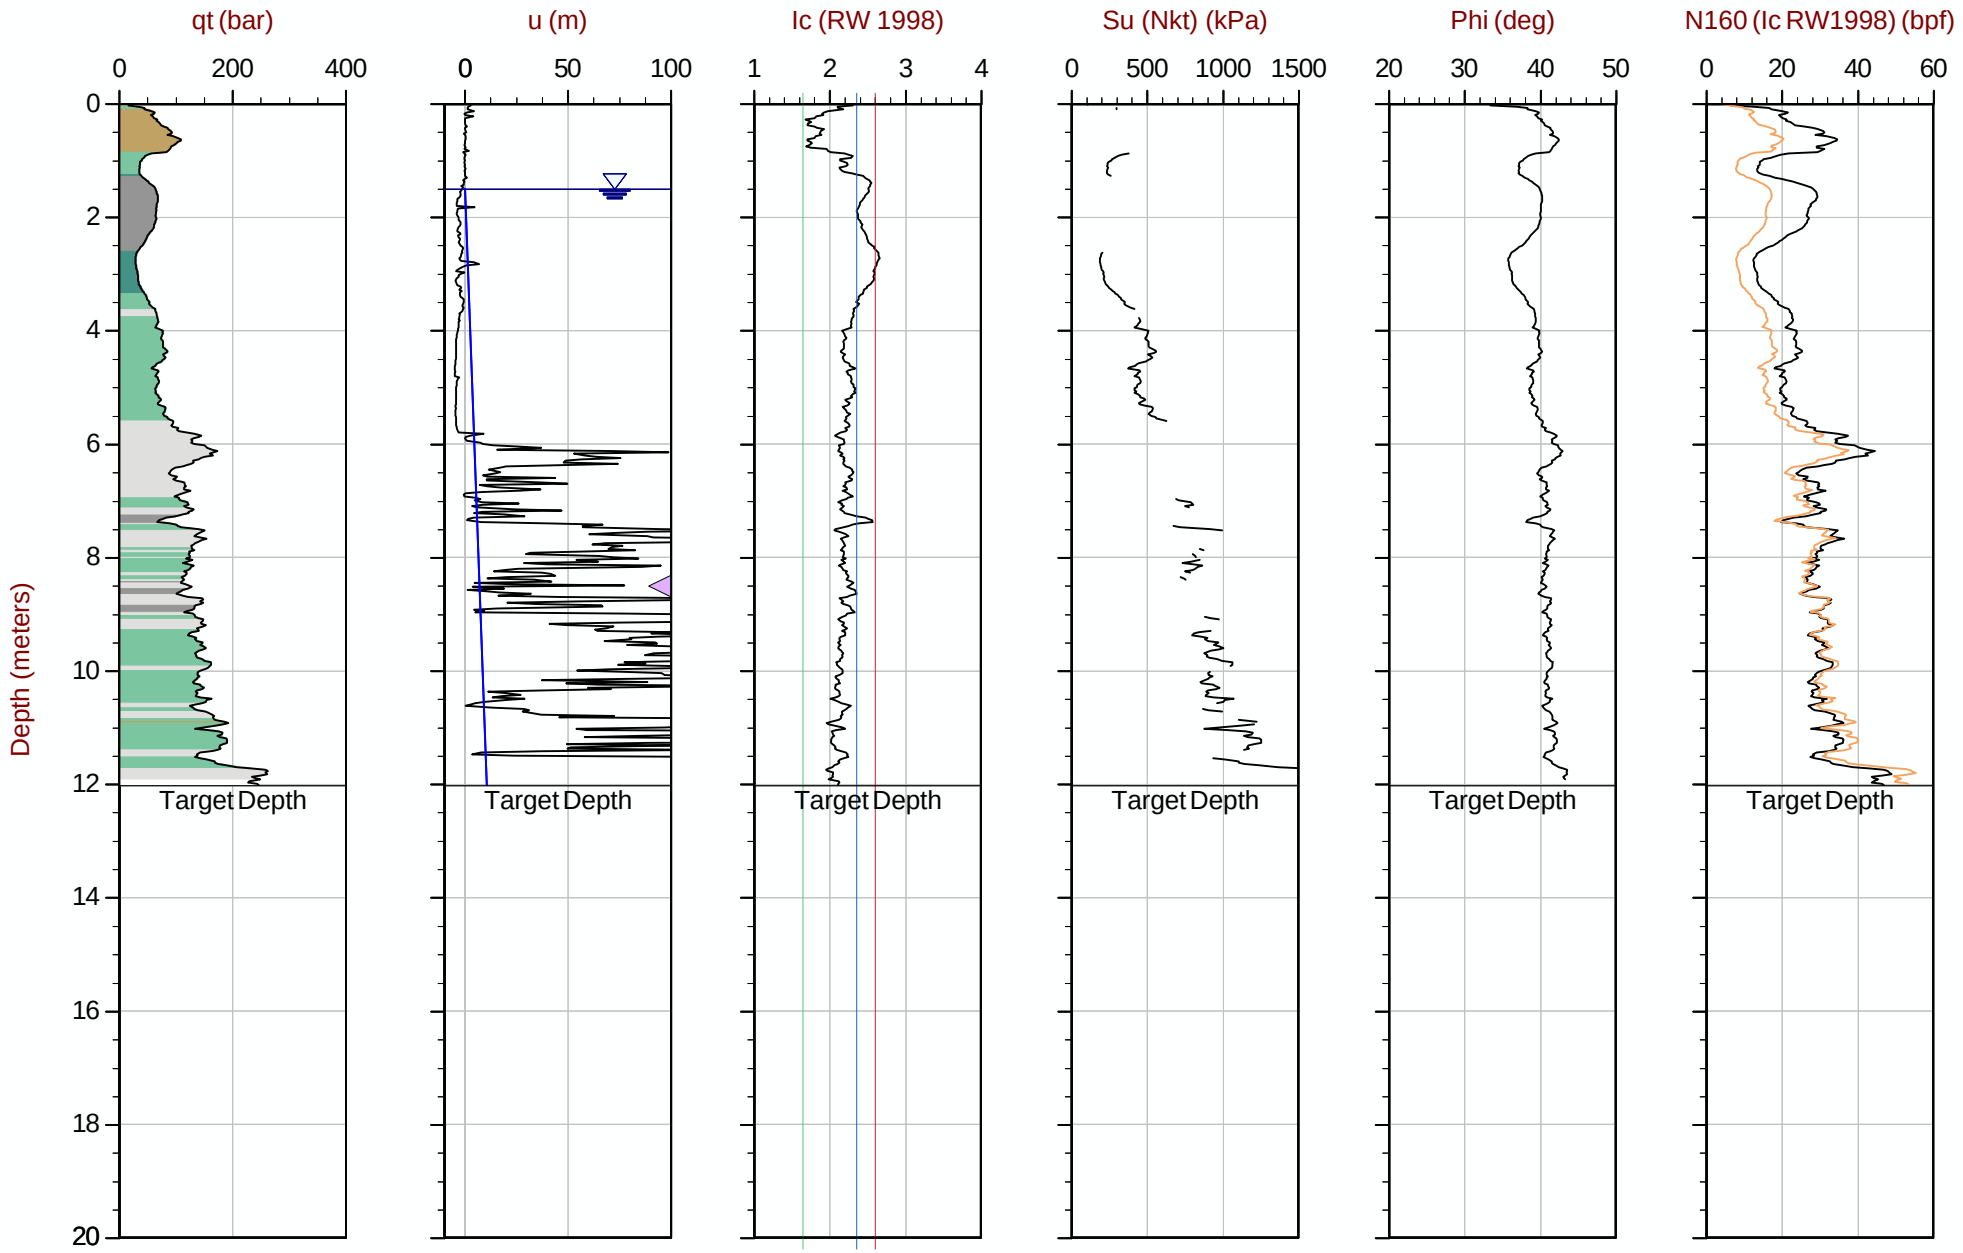

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT301B.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609511m E: 416692m Elev: 769.400m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 11:25
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT302
Cone: 854:T1500F15U35 Area= 15cm2

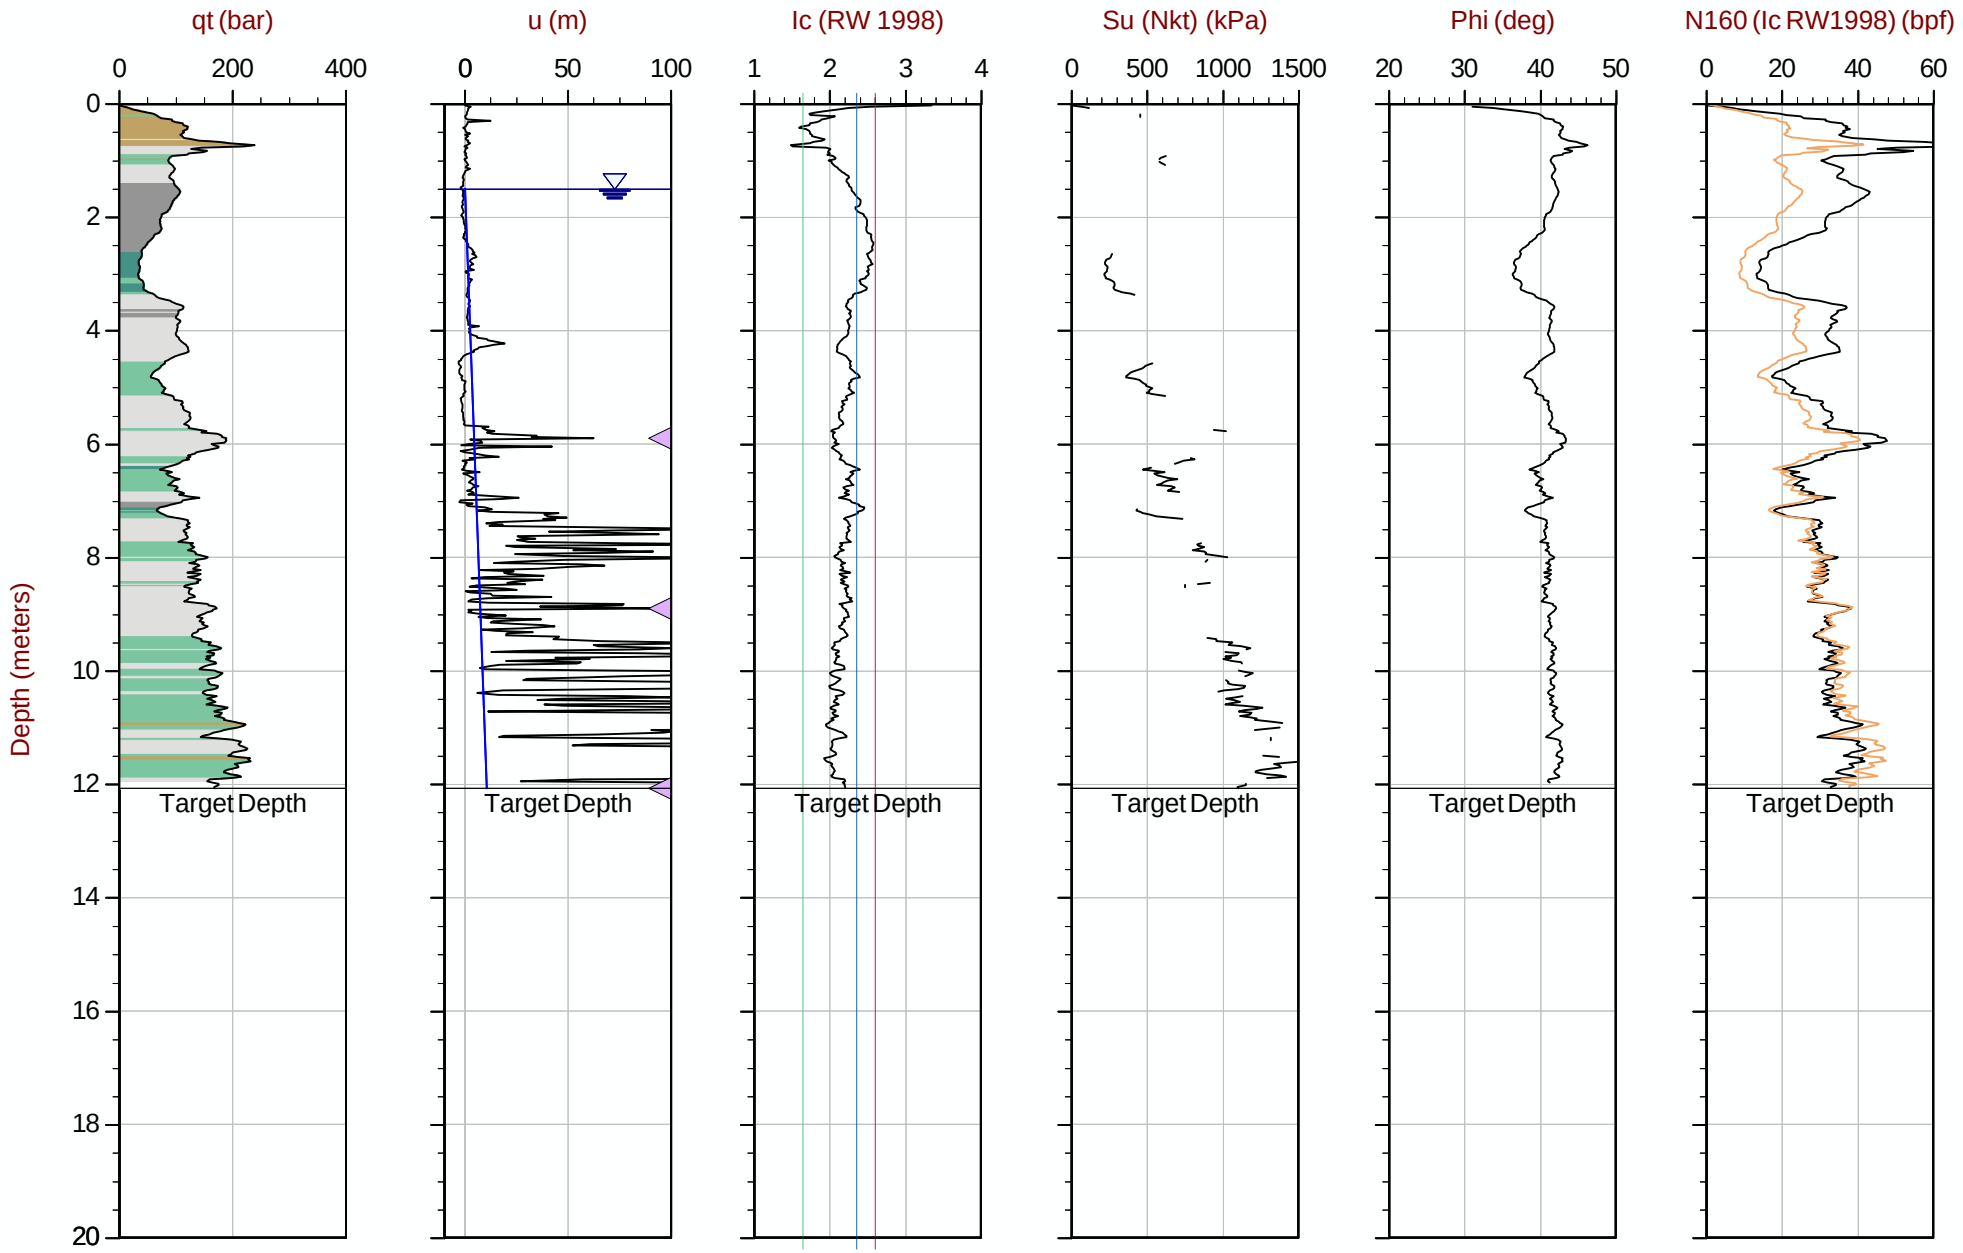

Max Depth: 12.075 m / 39.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT302.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609492m E: 416646m Elev: 769.017m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT303
Cone: 854:T1500F15U35 Area= 15cm2

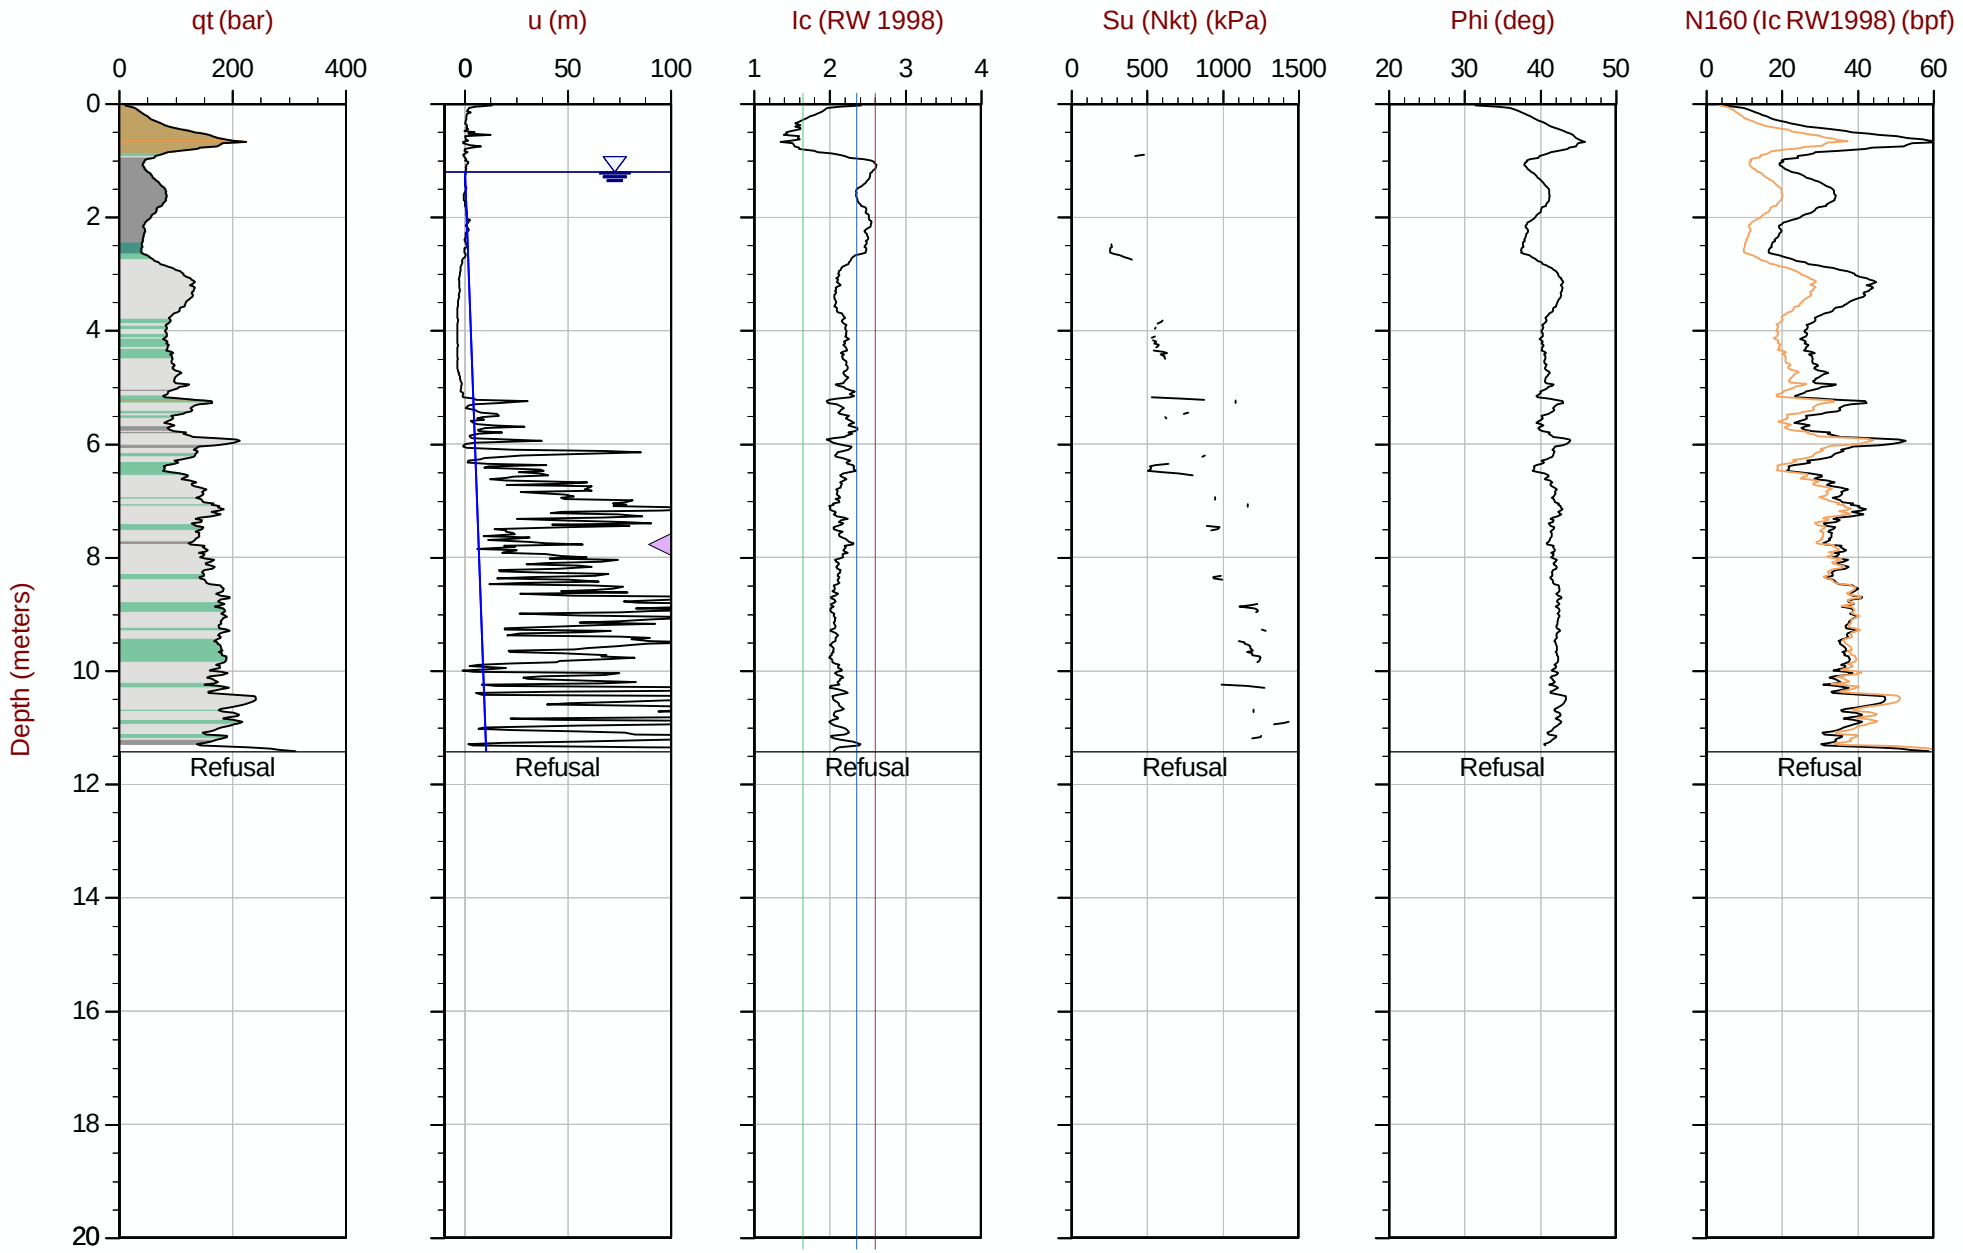

Max Depth: 11.425 m / 37.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT303.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609479m E: 416597m Elev: 768.788m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 14:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT304
Cone: 854:T1500F15U35 Area= 15cm2

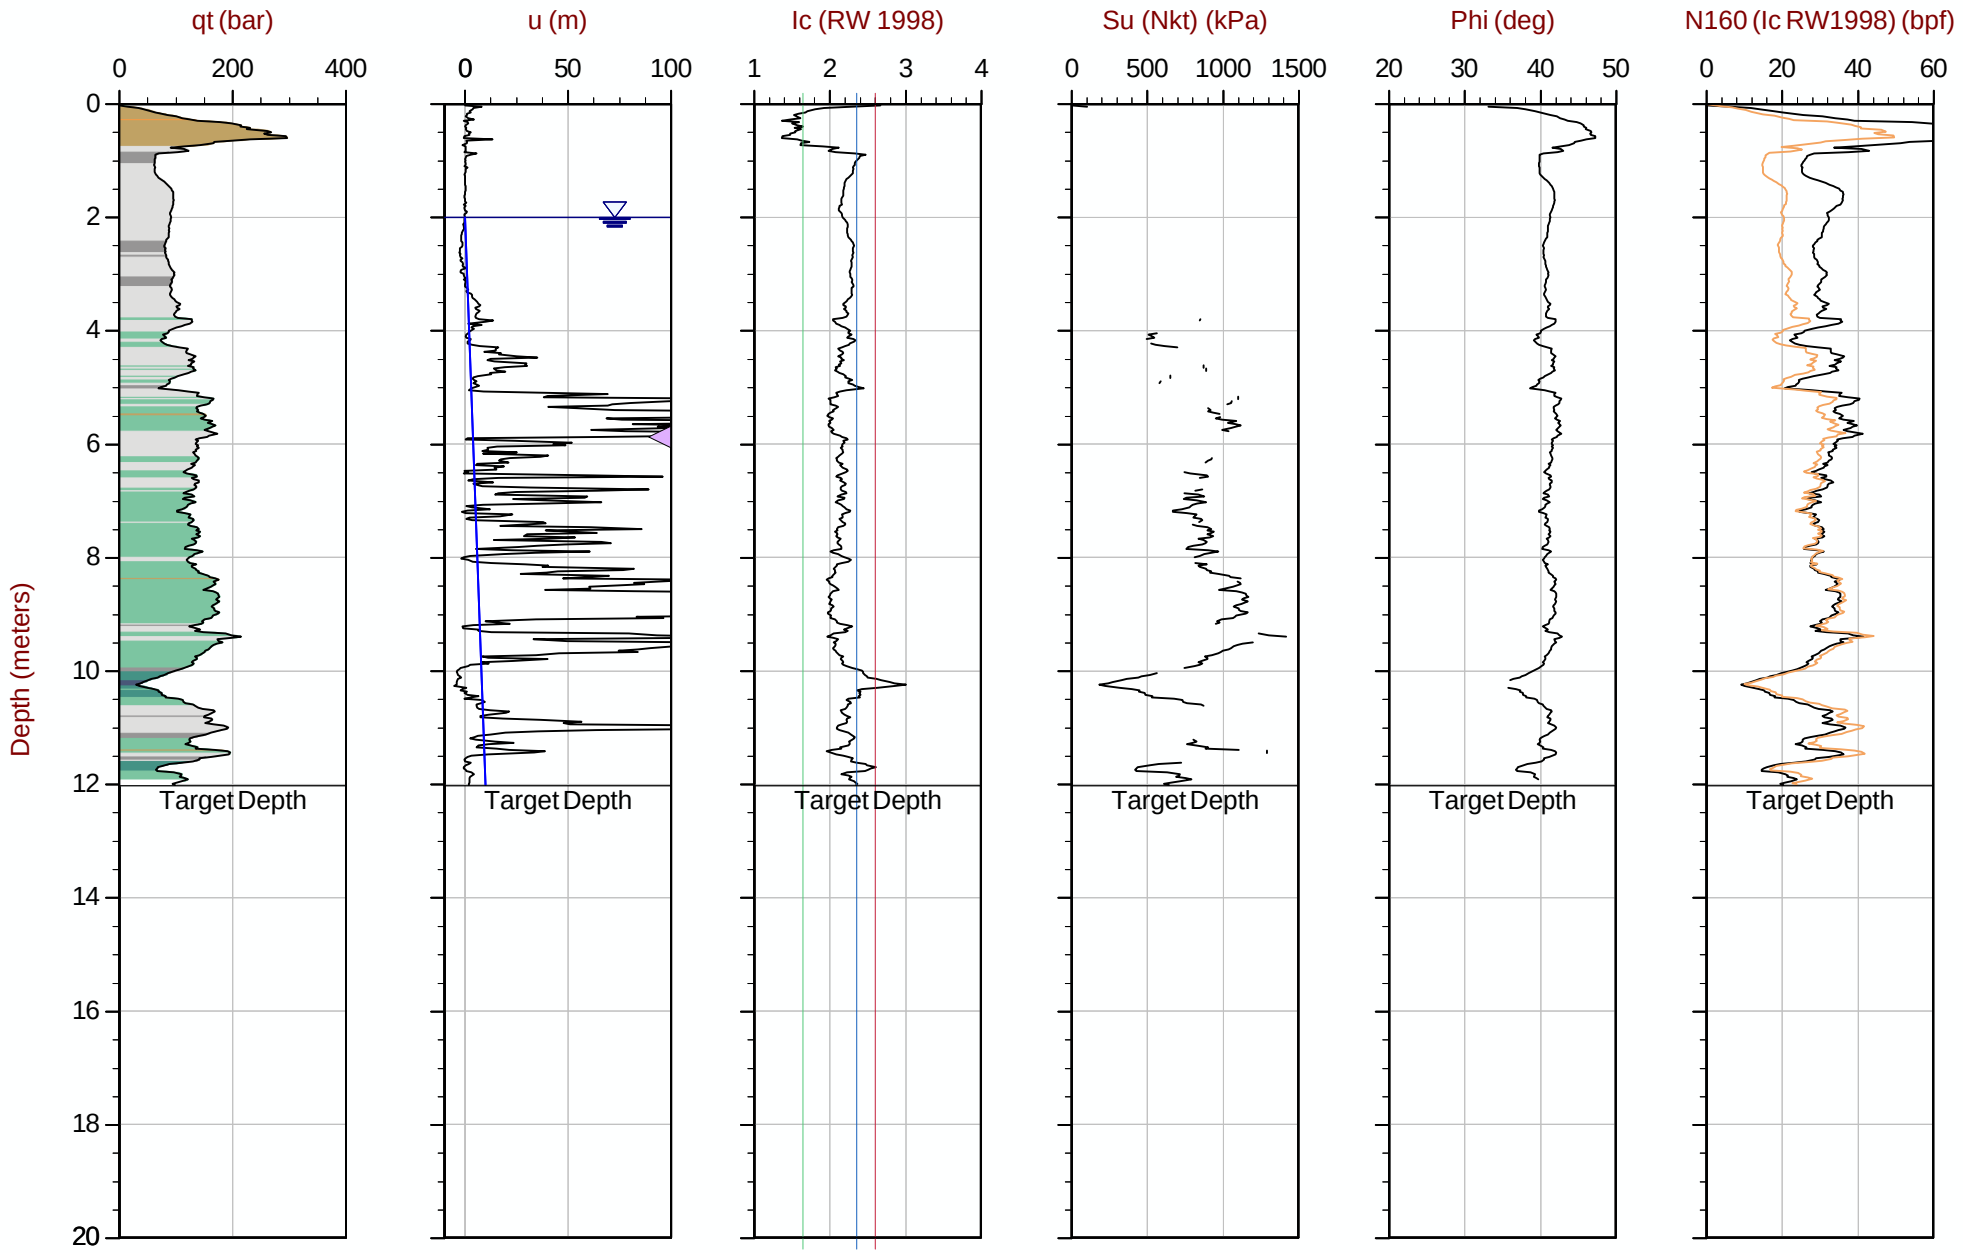

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT304.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416542m Elev: 770.051m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 16:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT305
Cone: 854:T1500F15U35 Area= 15cm2

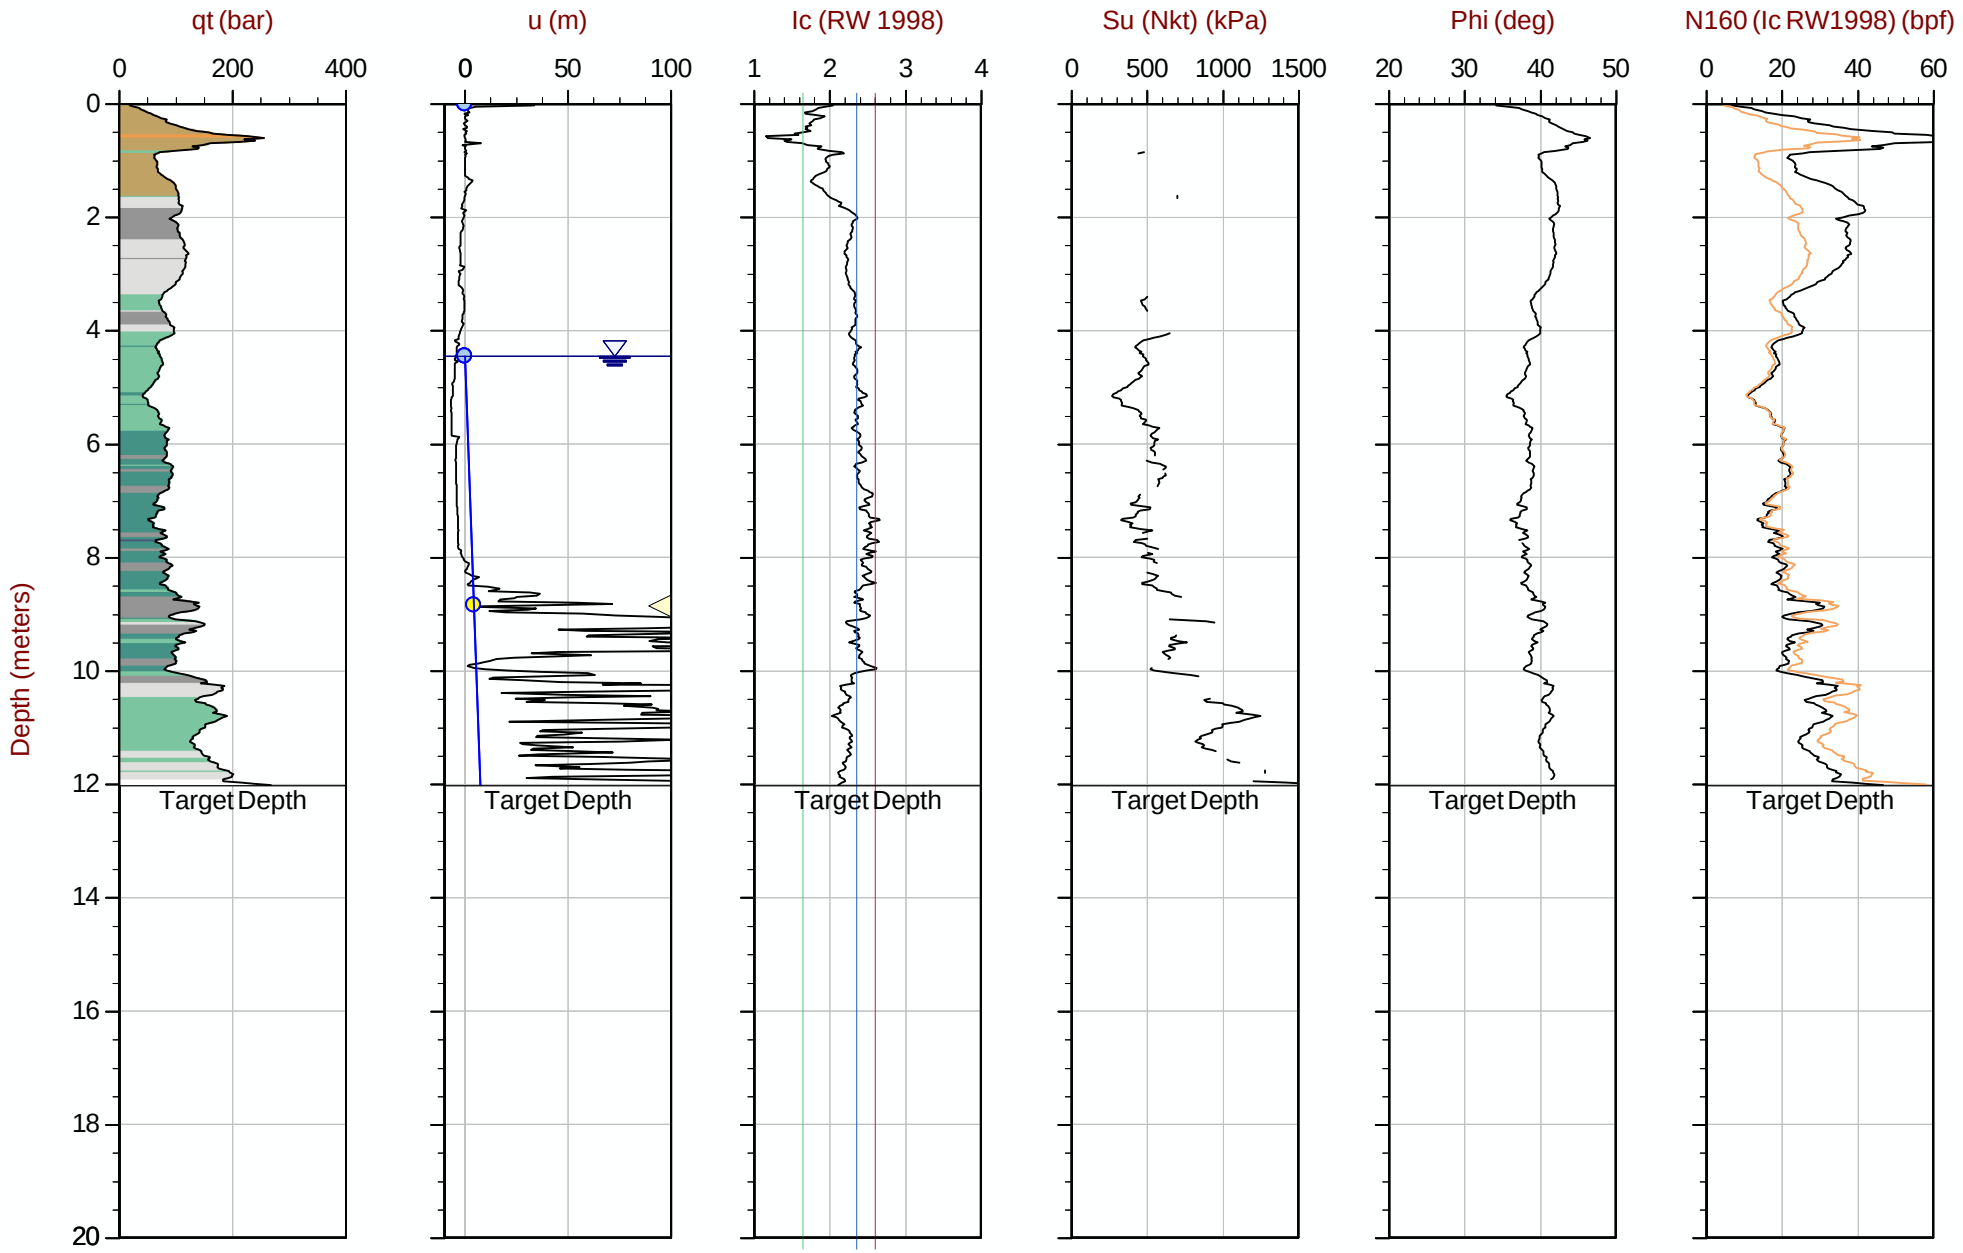

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT305.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416493m Elev: 770.908m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 06:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT306
Cone: 854:T1500F15U35 Area= 15cm2

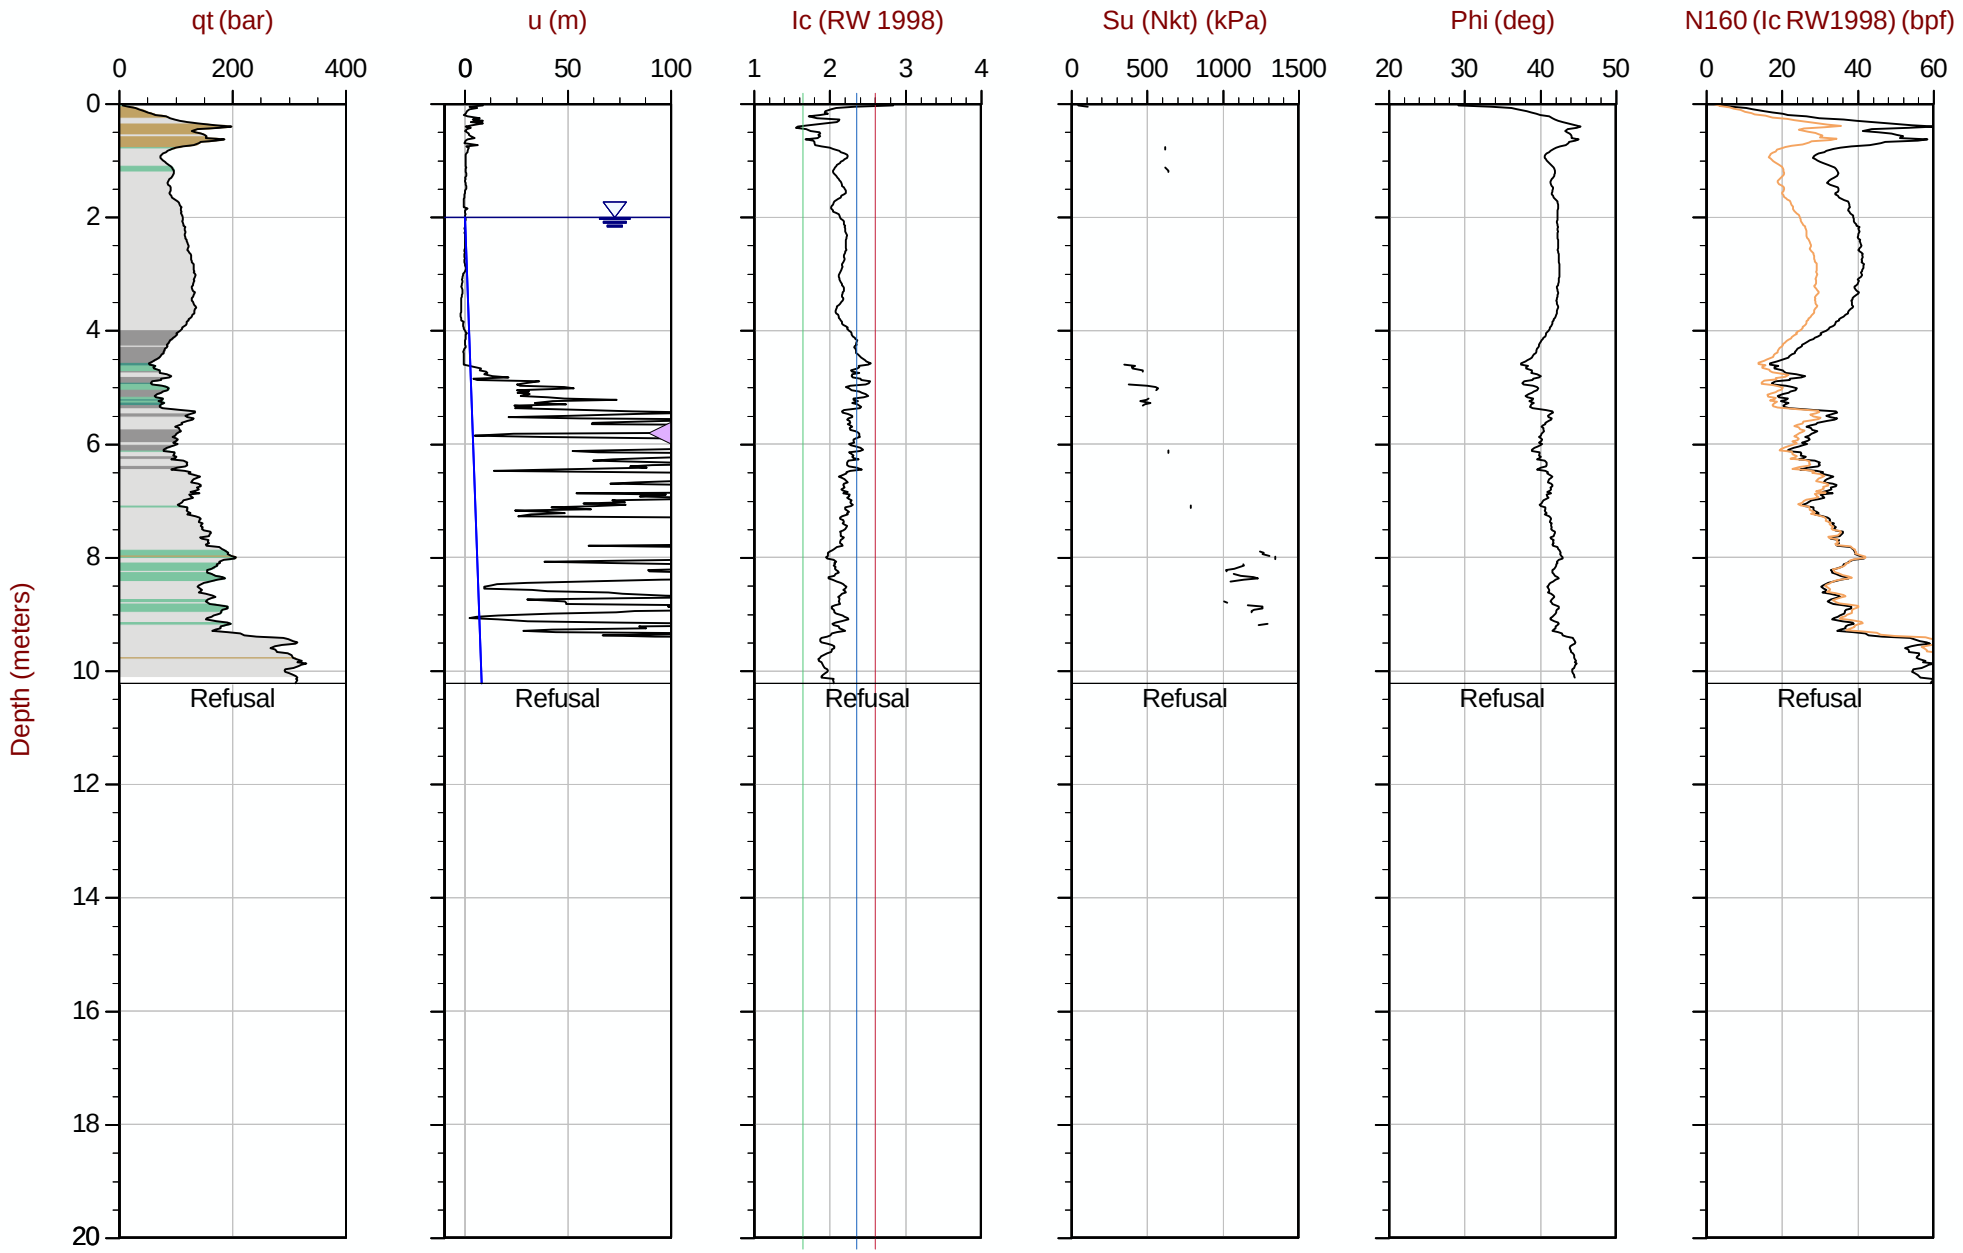

Max Depth: 10.225 m / 33.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT306.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416443m Elev: 770.594m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 09:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT307
Cone: 854:T1500F15U35 Area= 15cm2

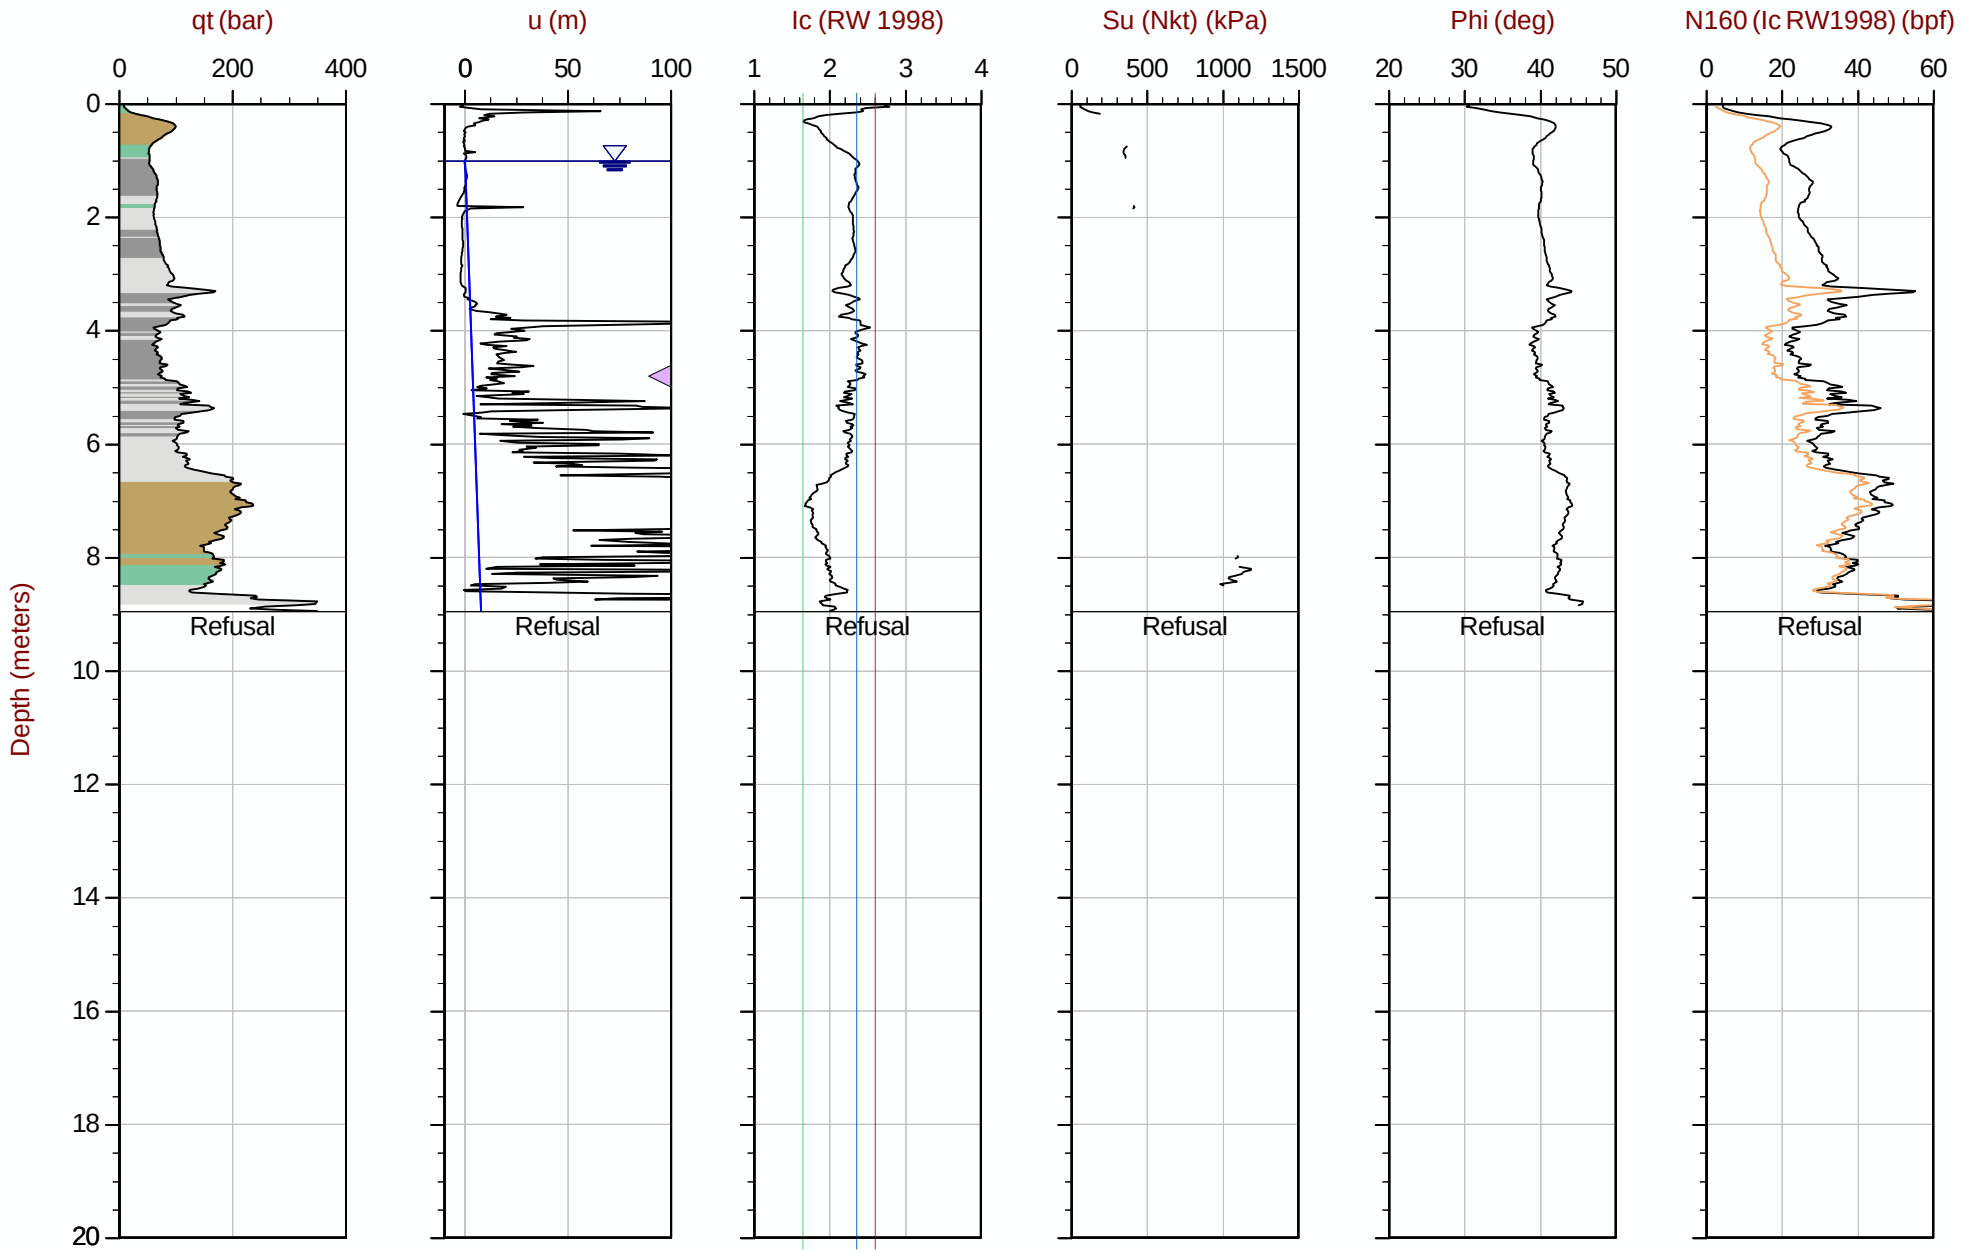

Max Depth: 8.950 m / 29.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT307.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416394m Elev: 770.324m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 10:11
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT308
Cone: 854:T1500F15U35 Area= 15cm2

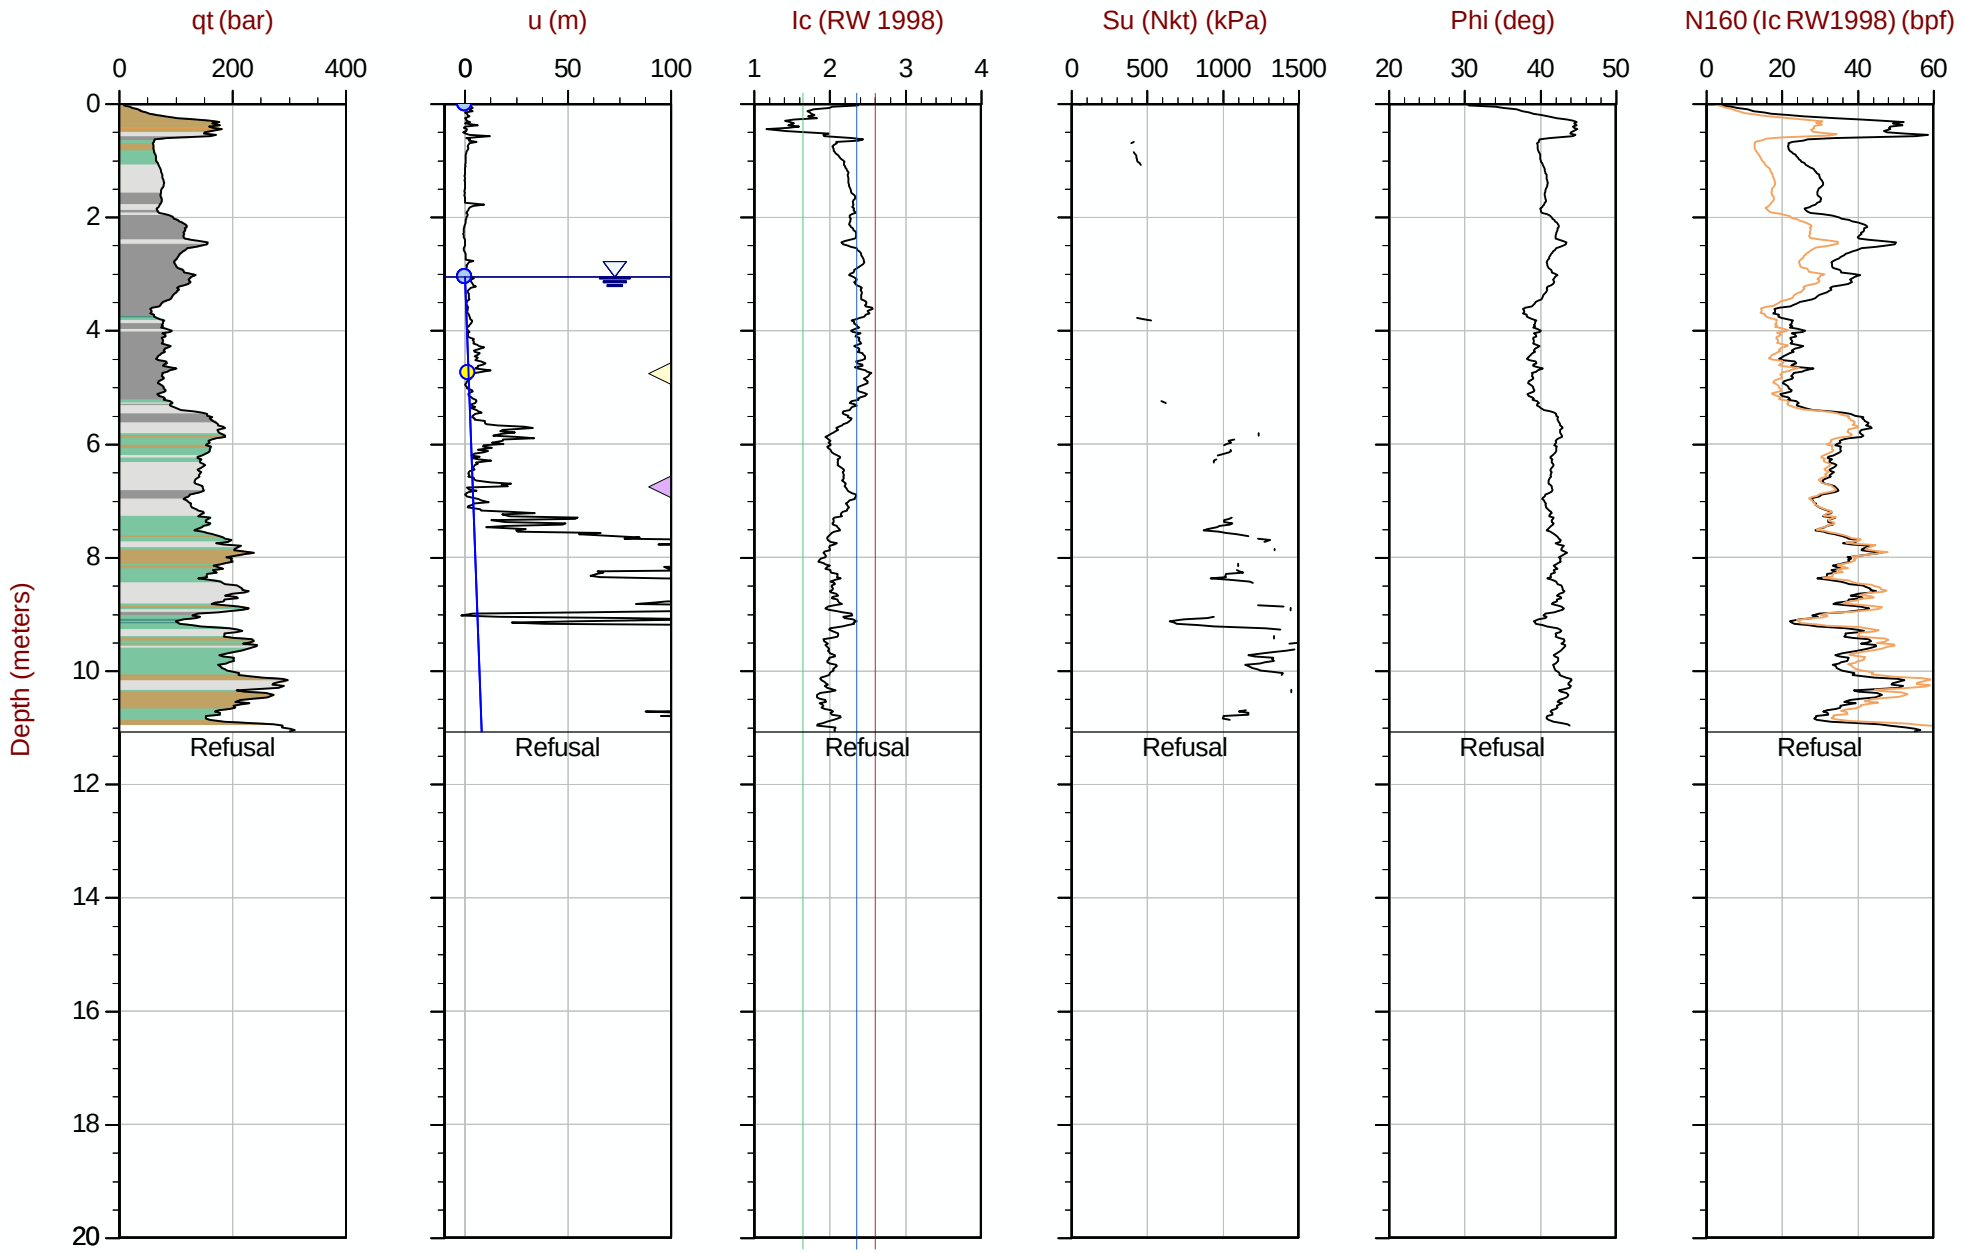

Max Depth: 11.075 m / 36.33 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT308.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416343m Elev: 770.650m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT309
Cone: 854:T1500F15U35 Area= 15cm2

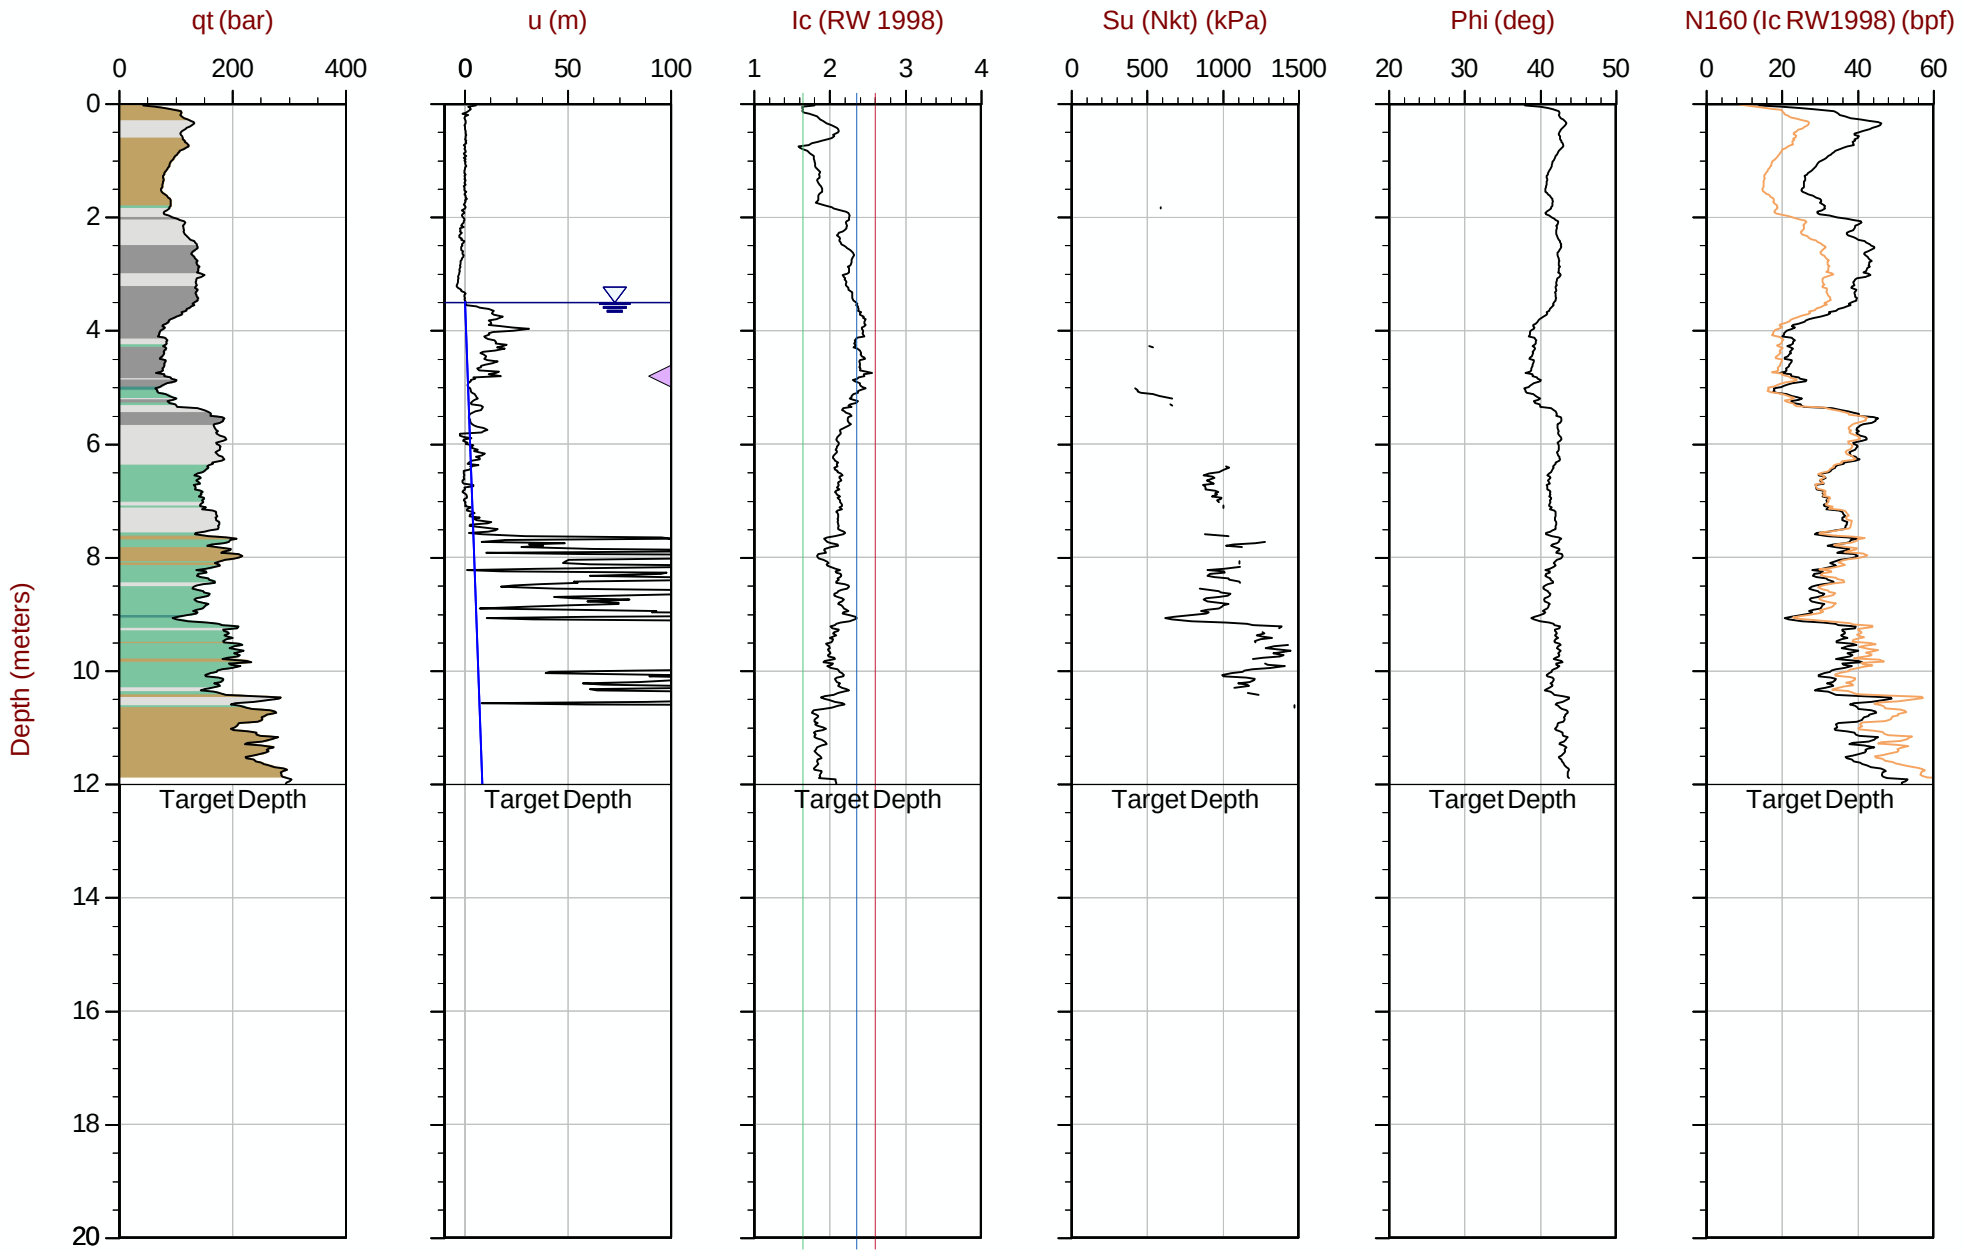

Max Depth: 12.000 m / 39.37 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT309.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416294m Elev: 771.192m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 13:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT310
Cone: 854:T1500F15U35 Area= 15cm2

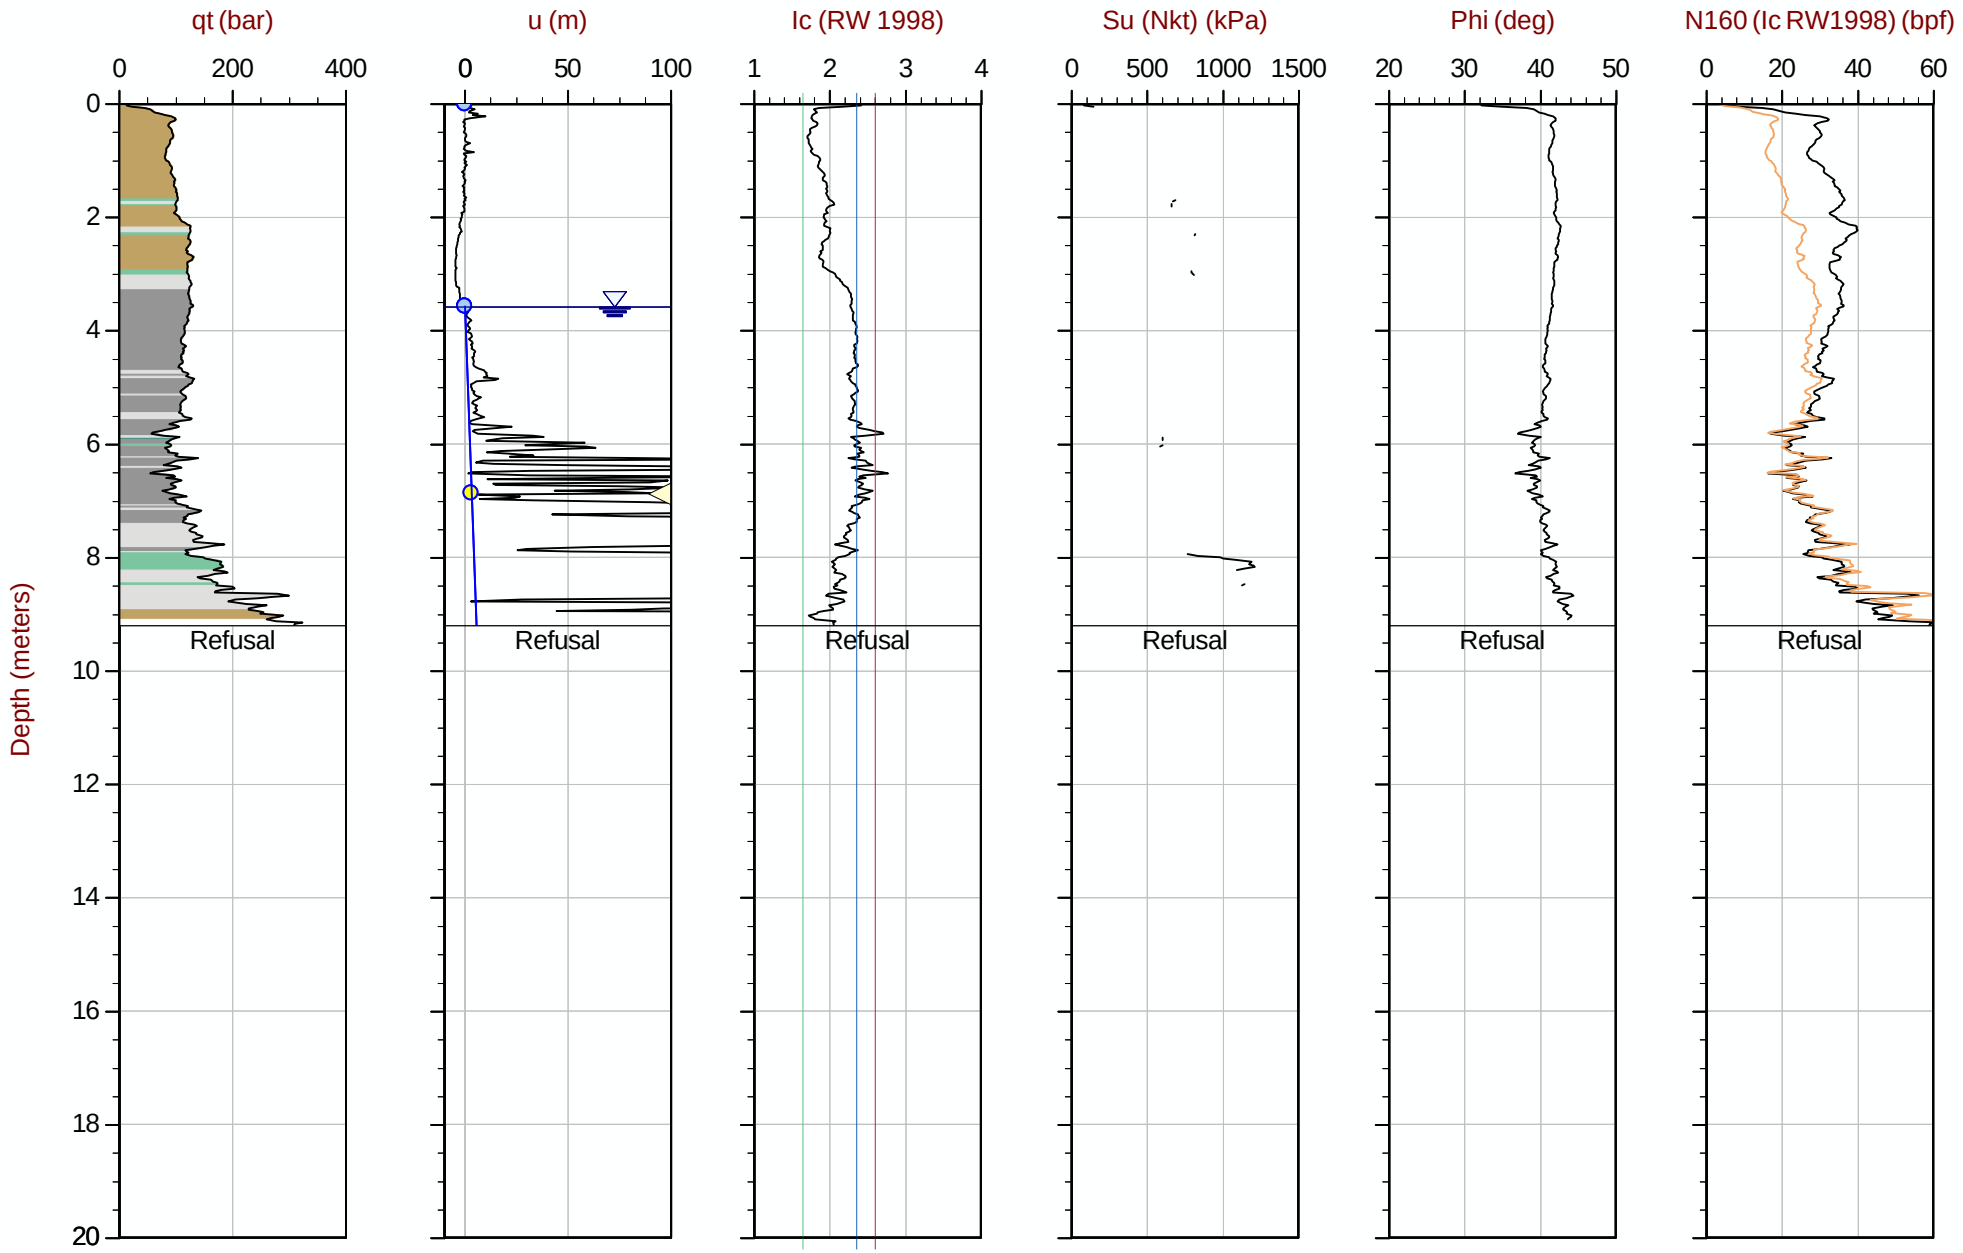

Max Depth: 9.200 m / 30.18 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT310.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416243m Elev: 771.391m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 15:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT311
Cone: 854:T1500F15U35 Area= 15cm2

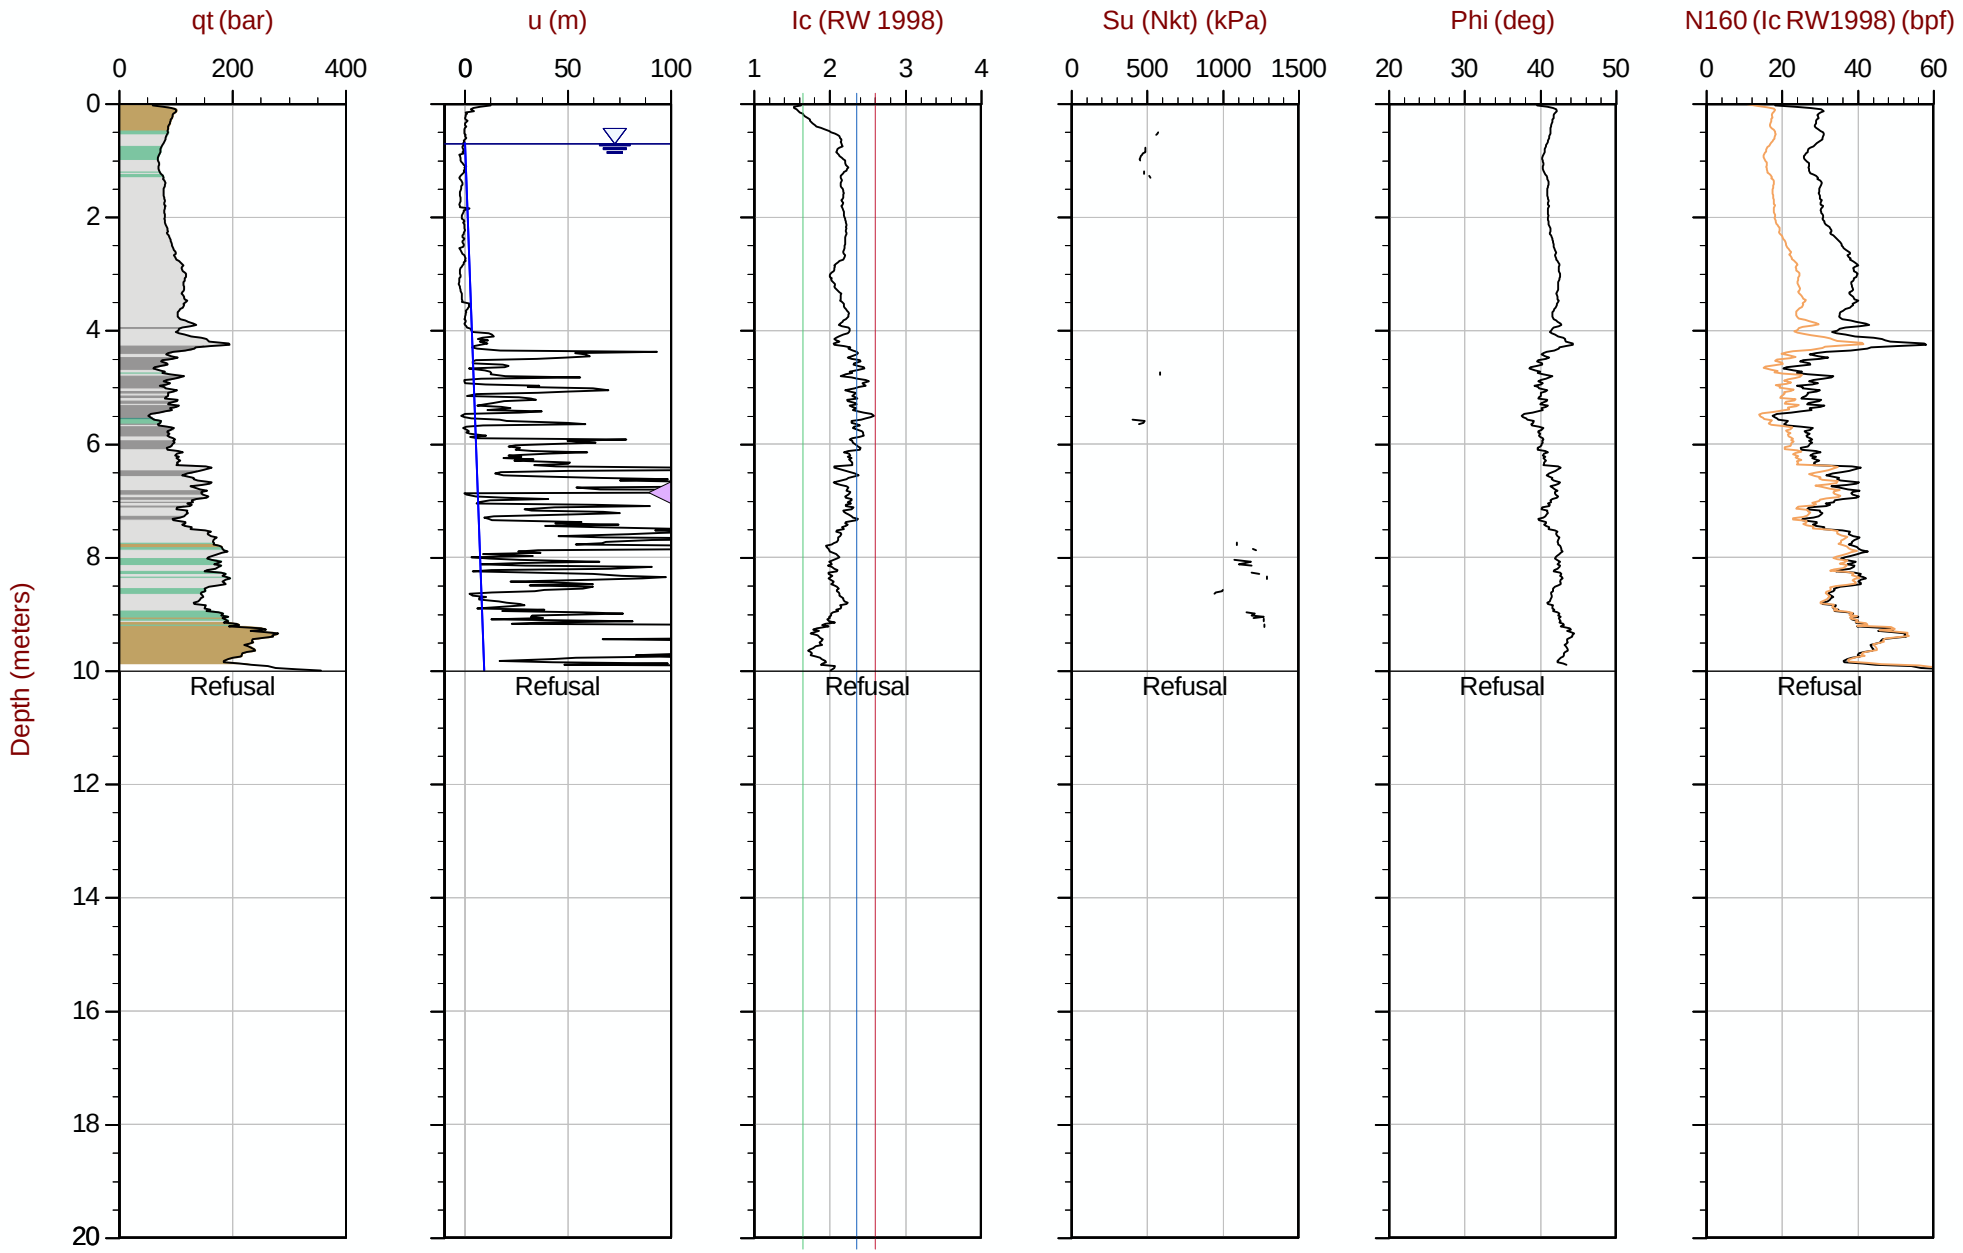

Max Depth: 10.000 m / 32.81 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT311.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416194m Elev: 771.238m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 17:01
Site: Brooks, Alberta

Sounding: RCPT22-22CPT312
Cone: 854:T1500F15U35 Area= 15cm2

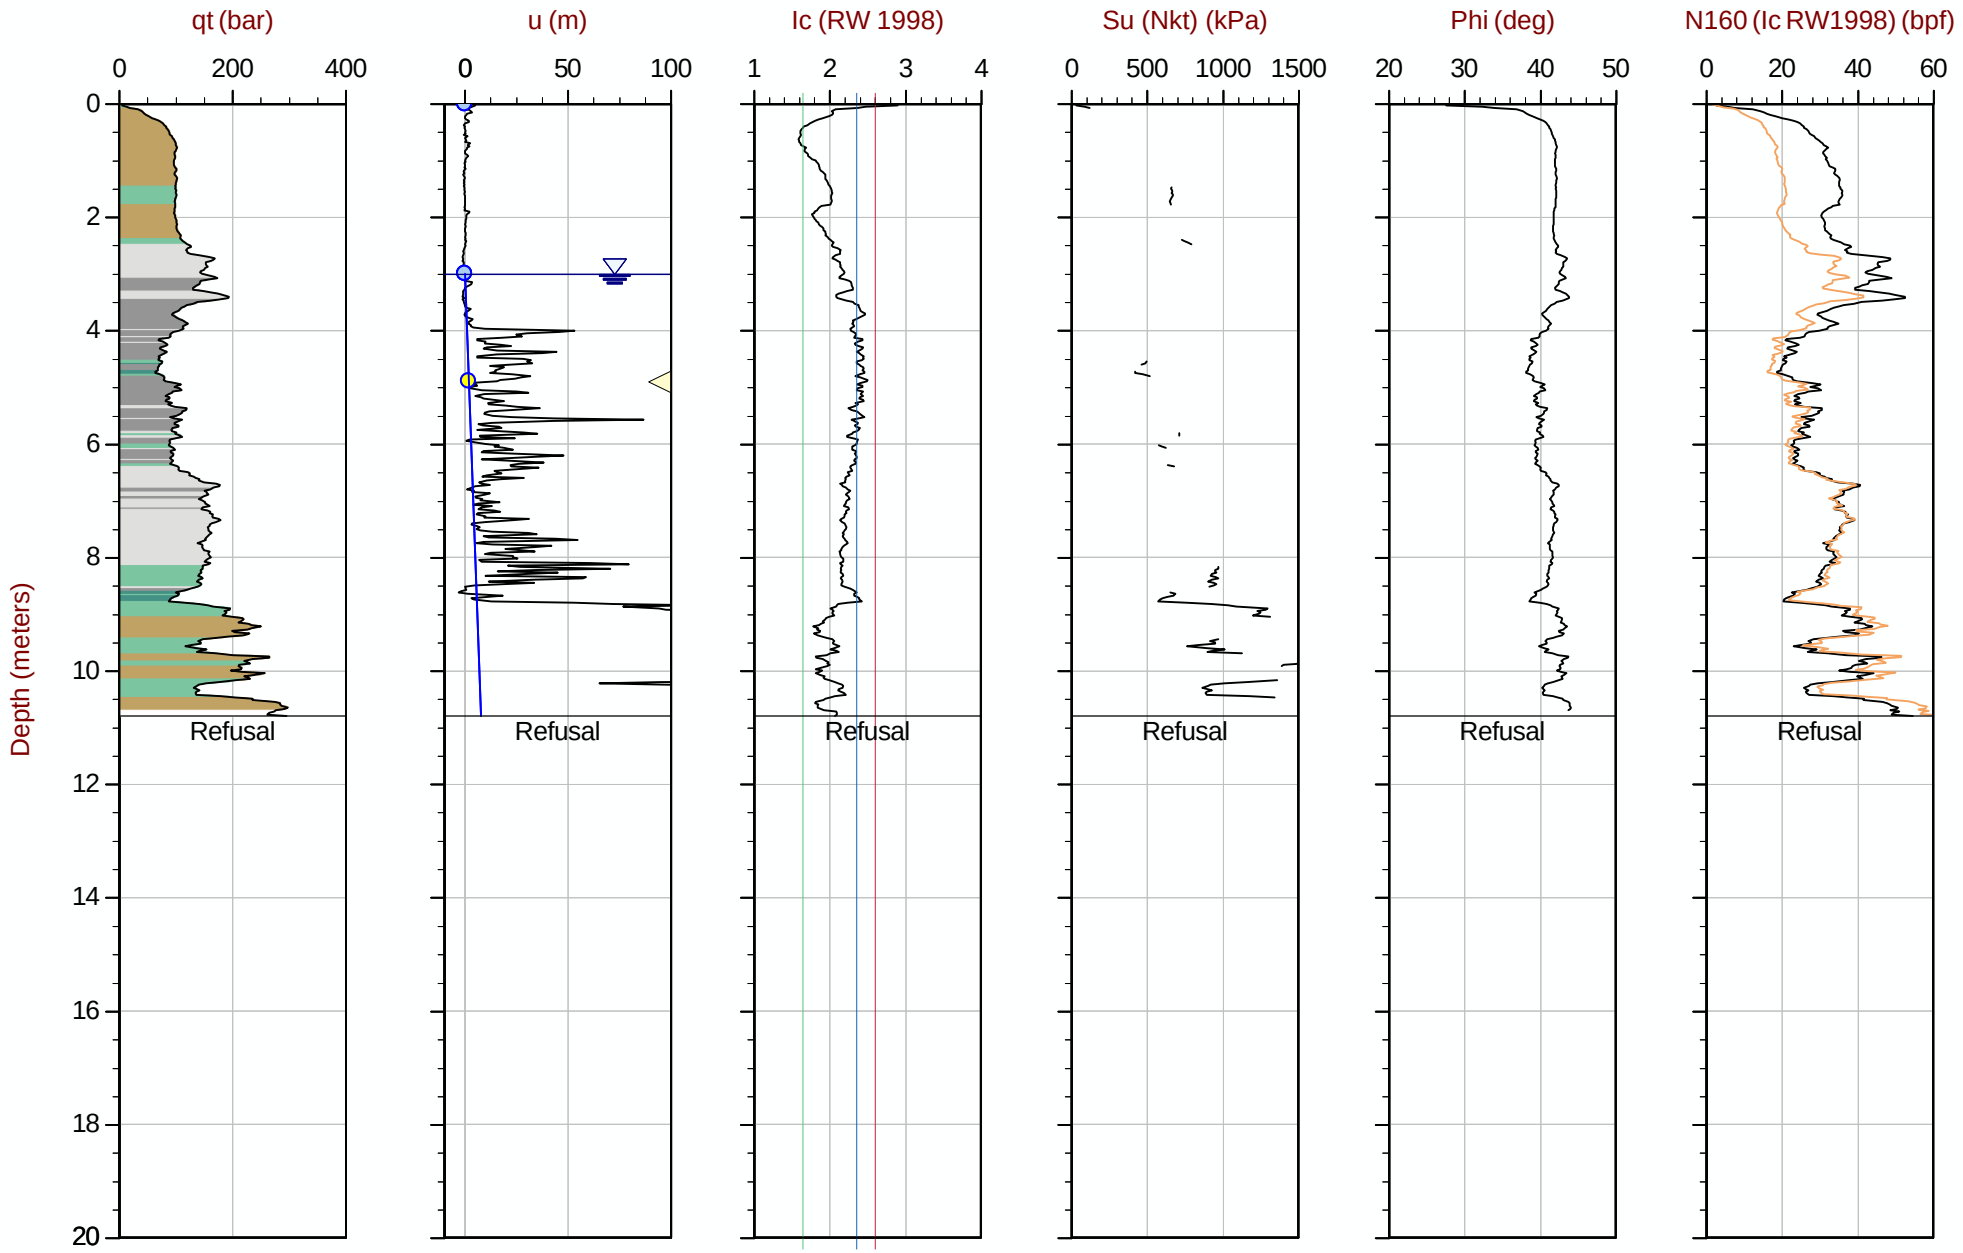

Max Depth: 10.800 m / 35.43 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT312.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416143m Elev: 771.376m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 08:55
Site: Brooks, Alberta

Sounding: RCPT22-22CPT313
Cone: 854:T1500F15U35 Area= 15cm2

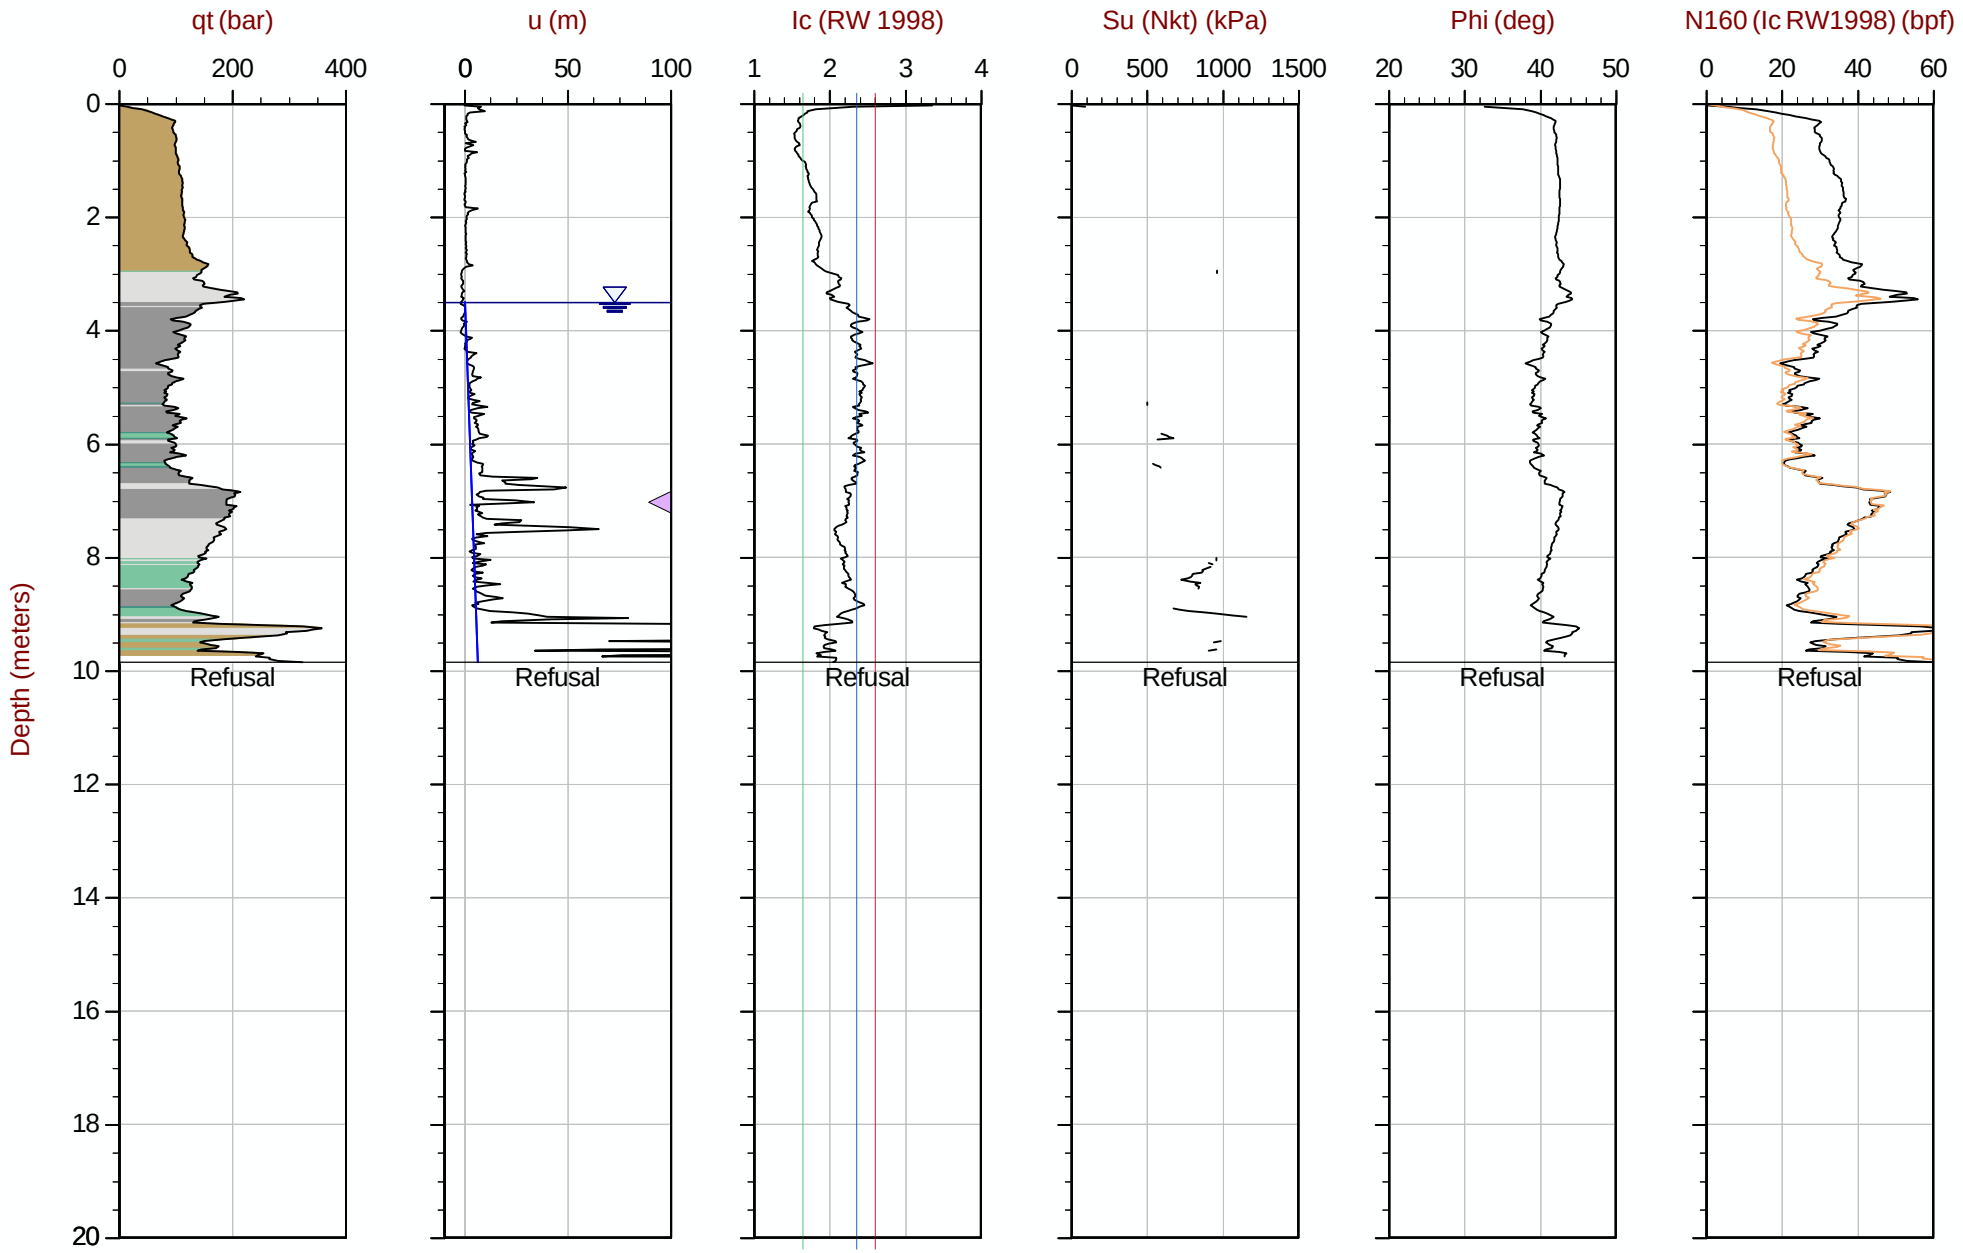

Max Depth: 9.850 m / 32.32 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT313.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416099m Elev: 771.568m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 09:56
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT314
Cone: 854:T1500F15U35 Area= 15cm2

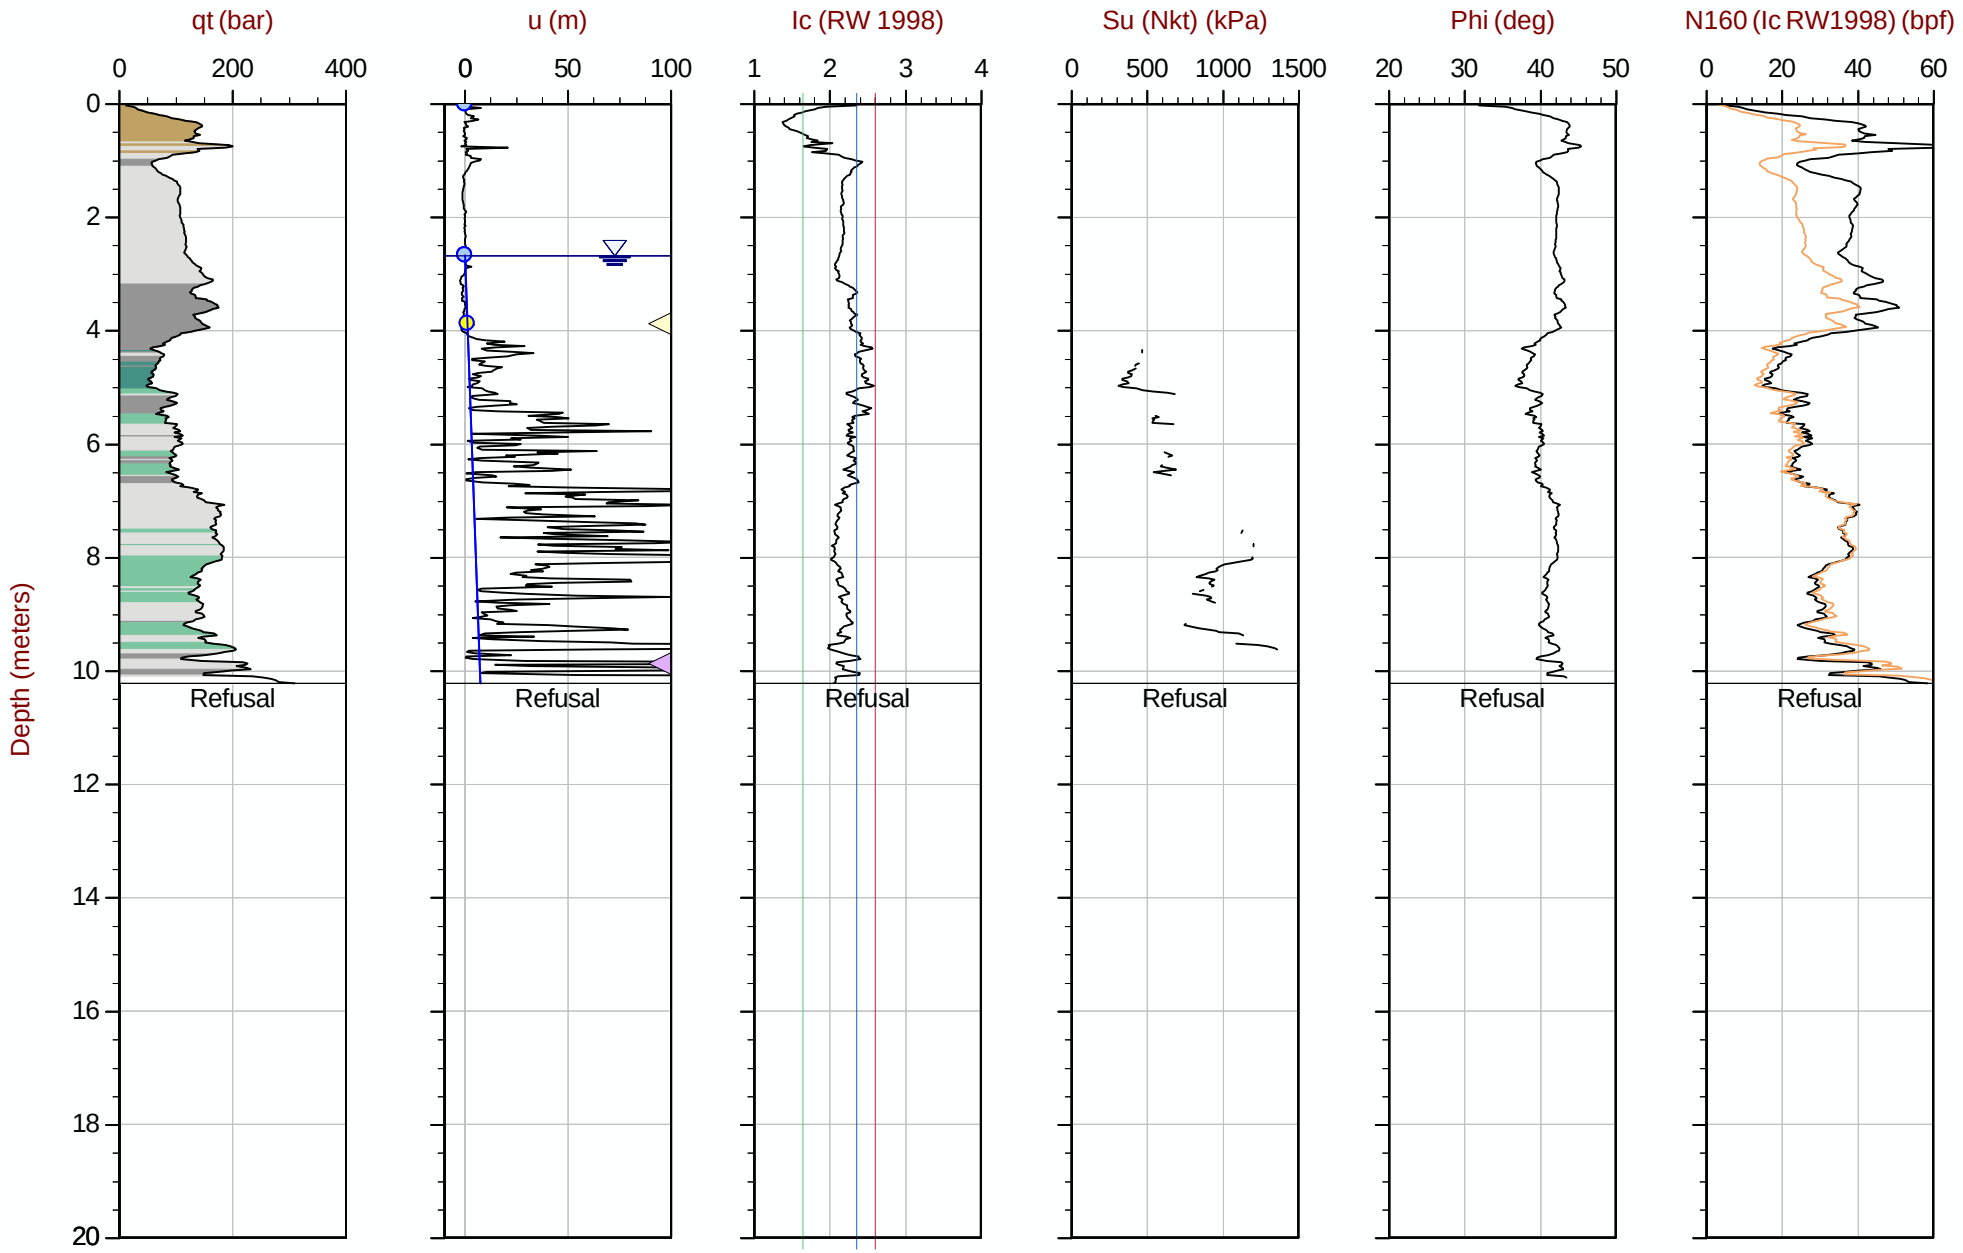

Max Depth: 10.225 m / 33.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT314.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416043m Elev: 771.585m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 12:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT315
Cone: 854:T1500F15U35 Area= 15cm2

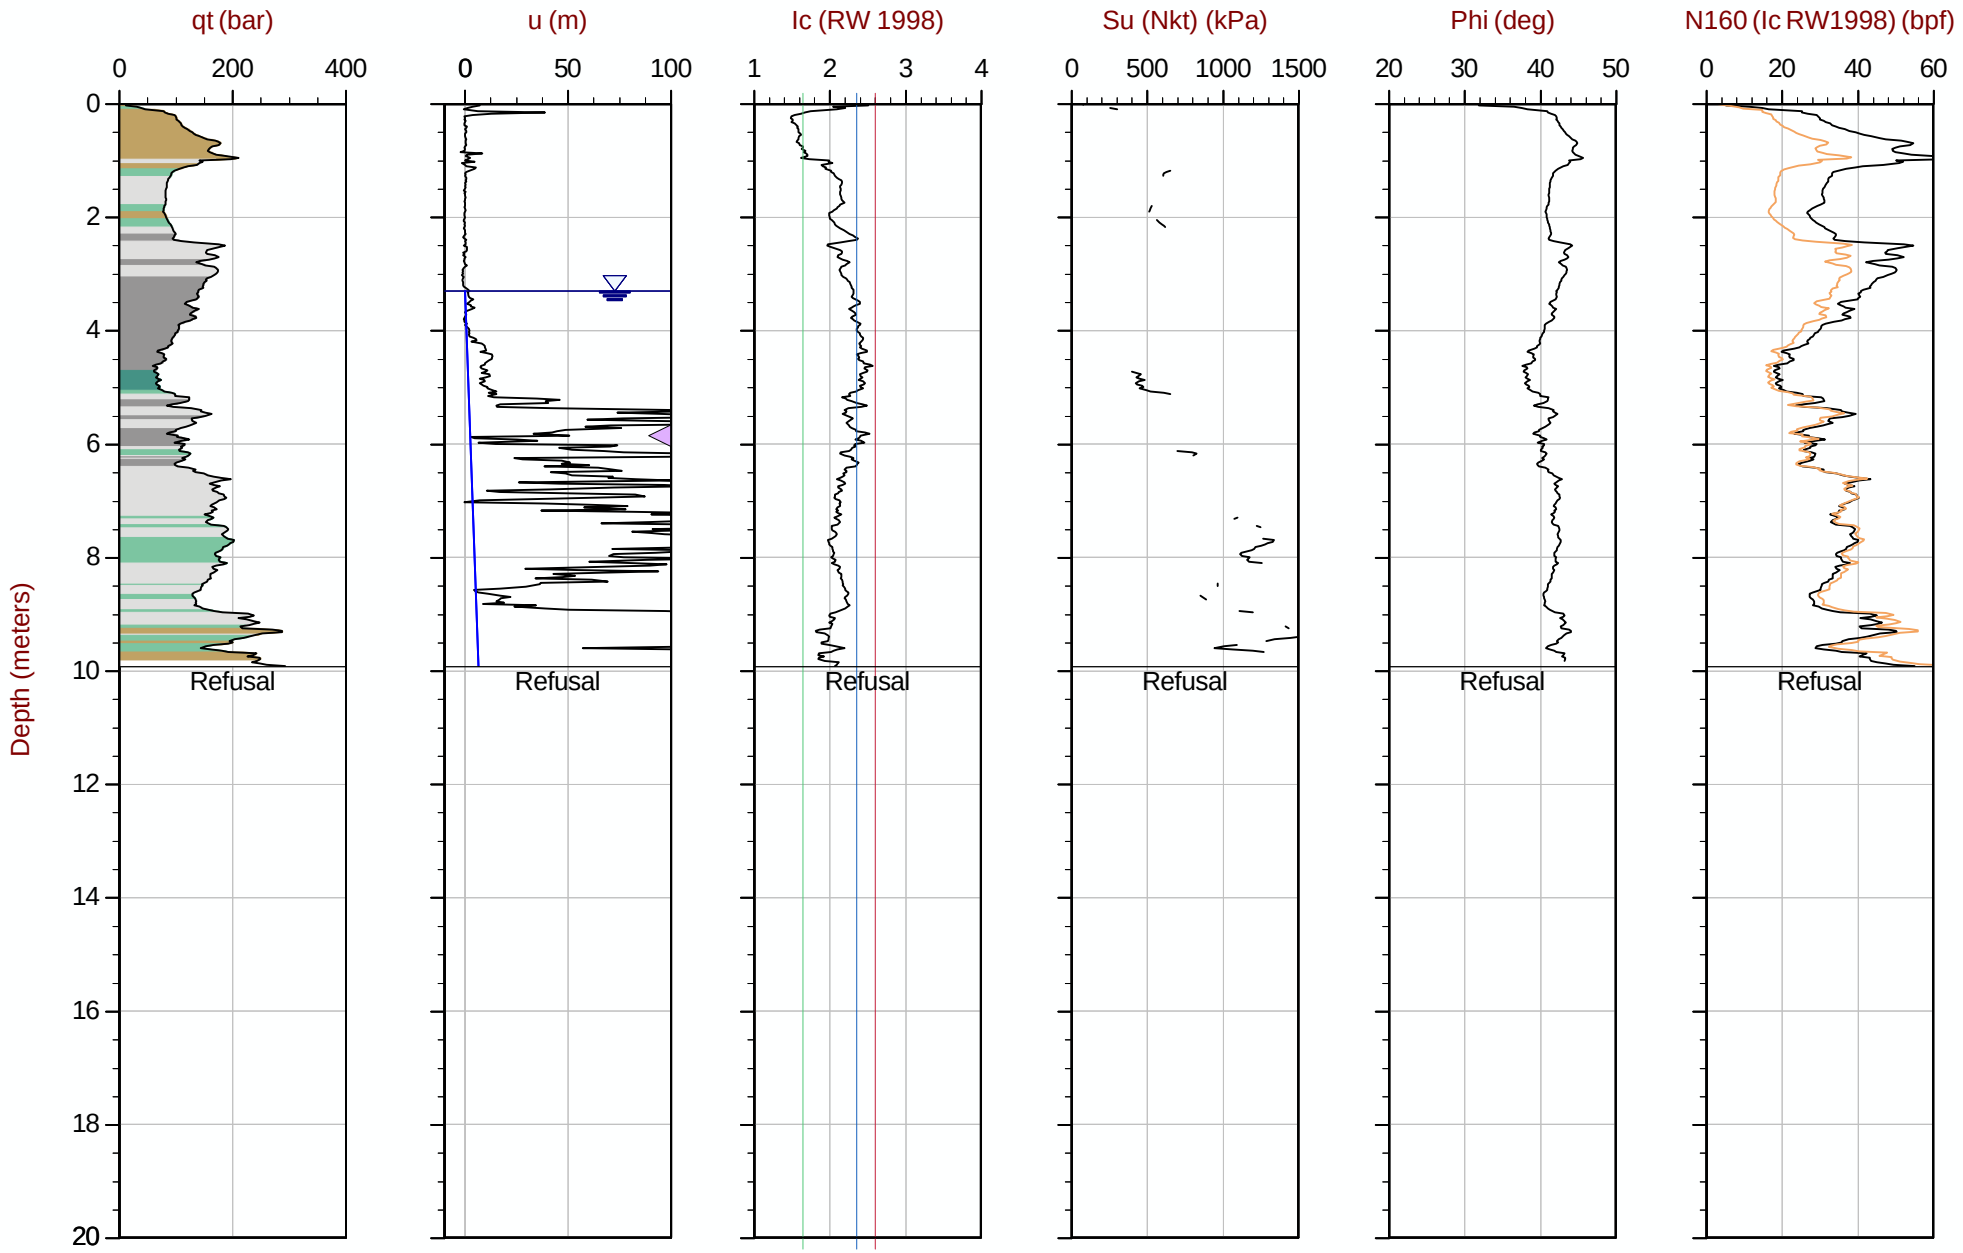

Max Depth: 9.925 m / 32.56 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT315.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 415990m Elev: 771.927m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 13:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT316
Cone: 854:T1500F15U35 Area= 15cm2

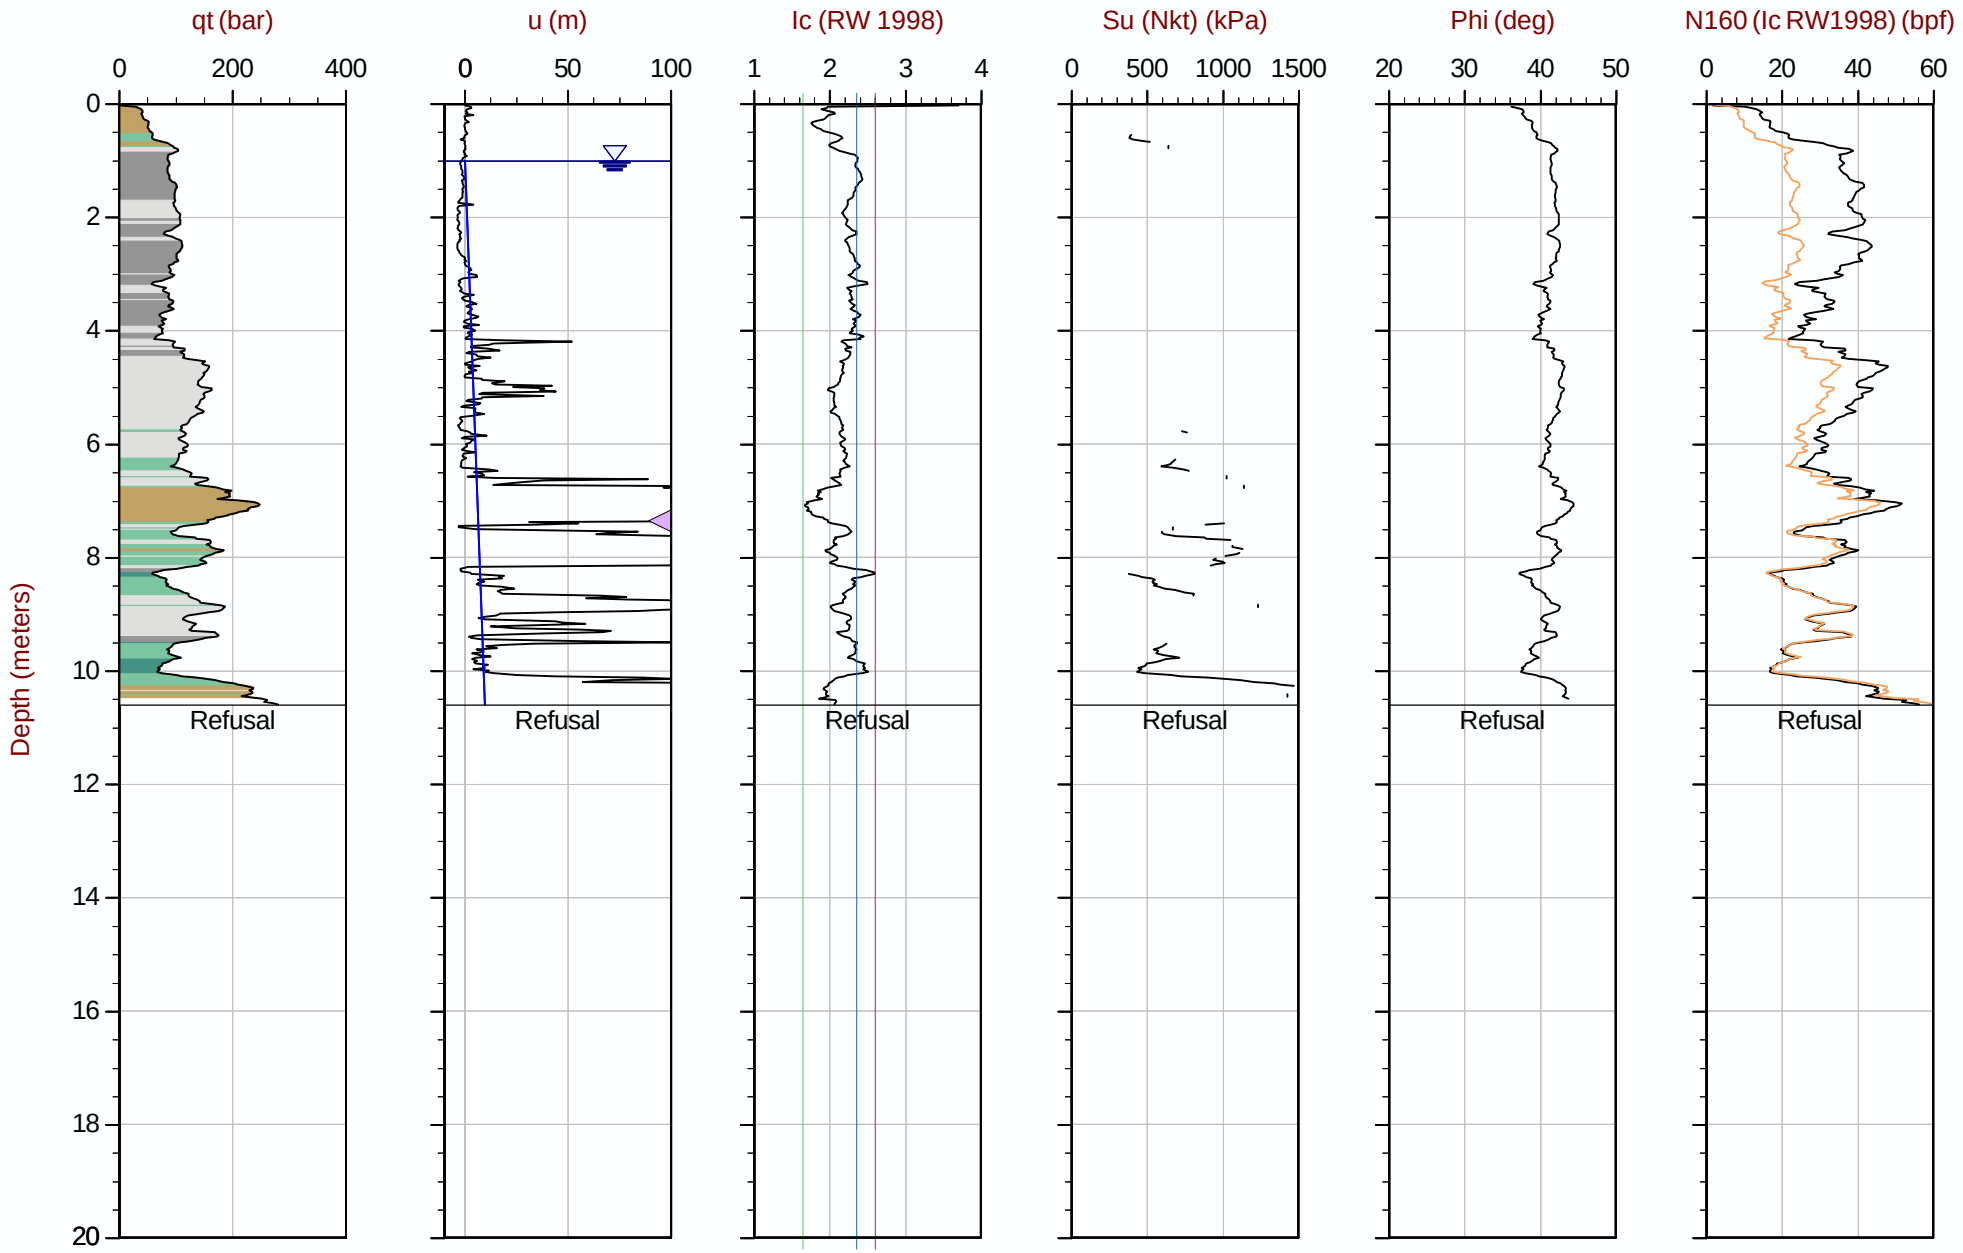

Max Depth: 10.600 m / 34.78 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT316.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609473m E: 415943m Elev: 772.448m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 14:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT317
Cone: 854:T1500F15U35 Area= 15cm2

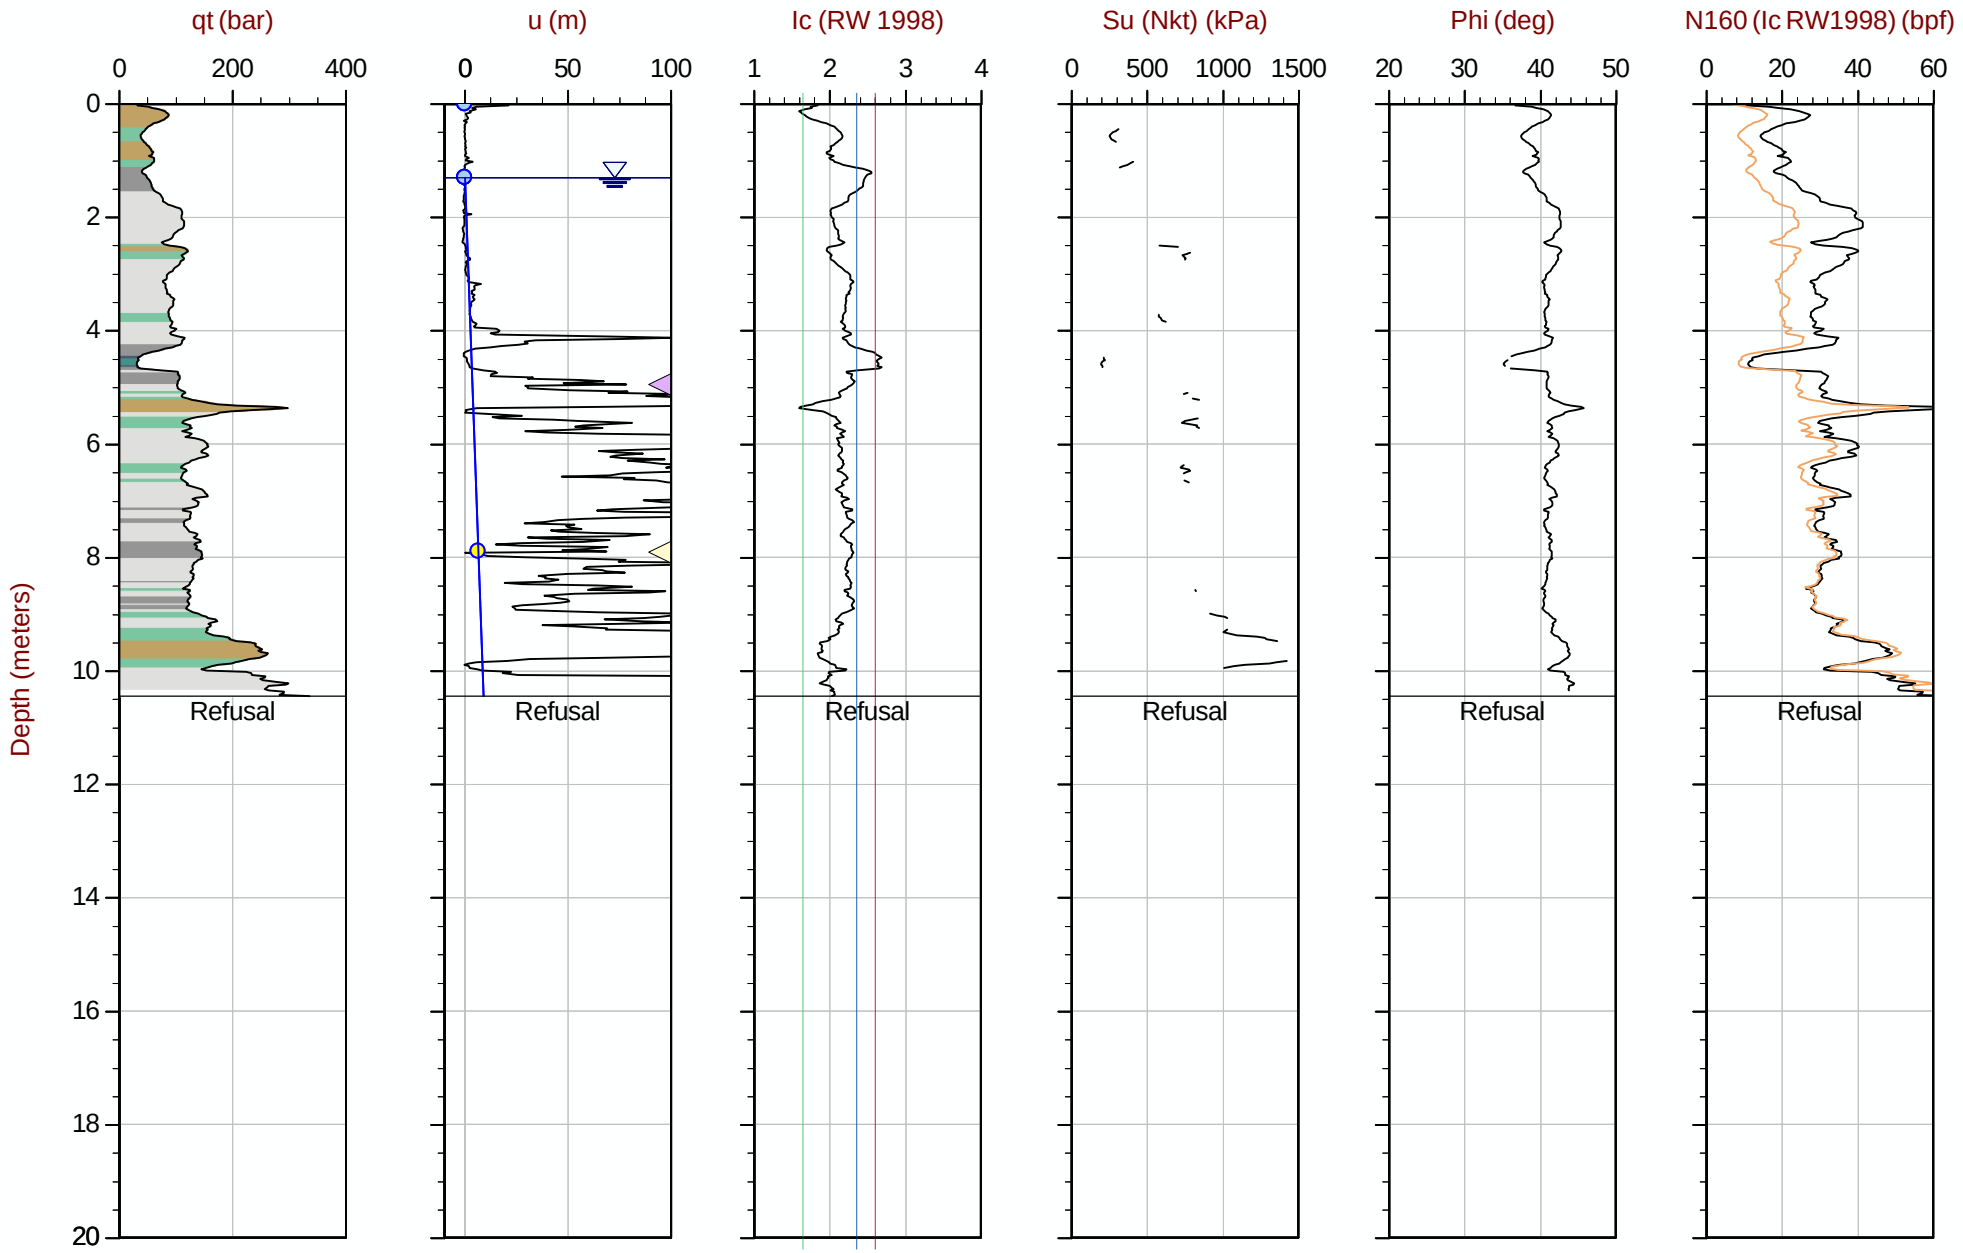

Max Depth: 10.450 m / 34.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT317.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609471m E: 415893m Elev: 773.891m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 15:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT318
Cone: 854:T1500F15U35 Area= 15cm2

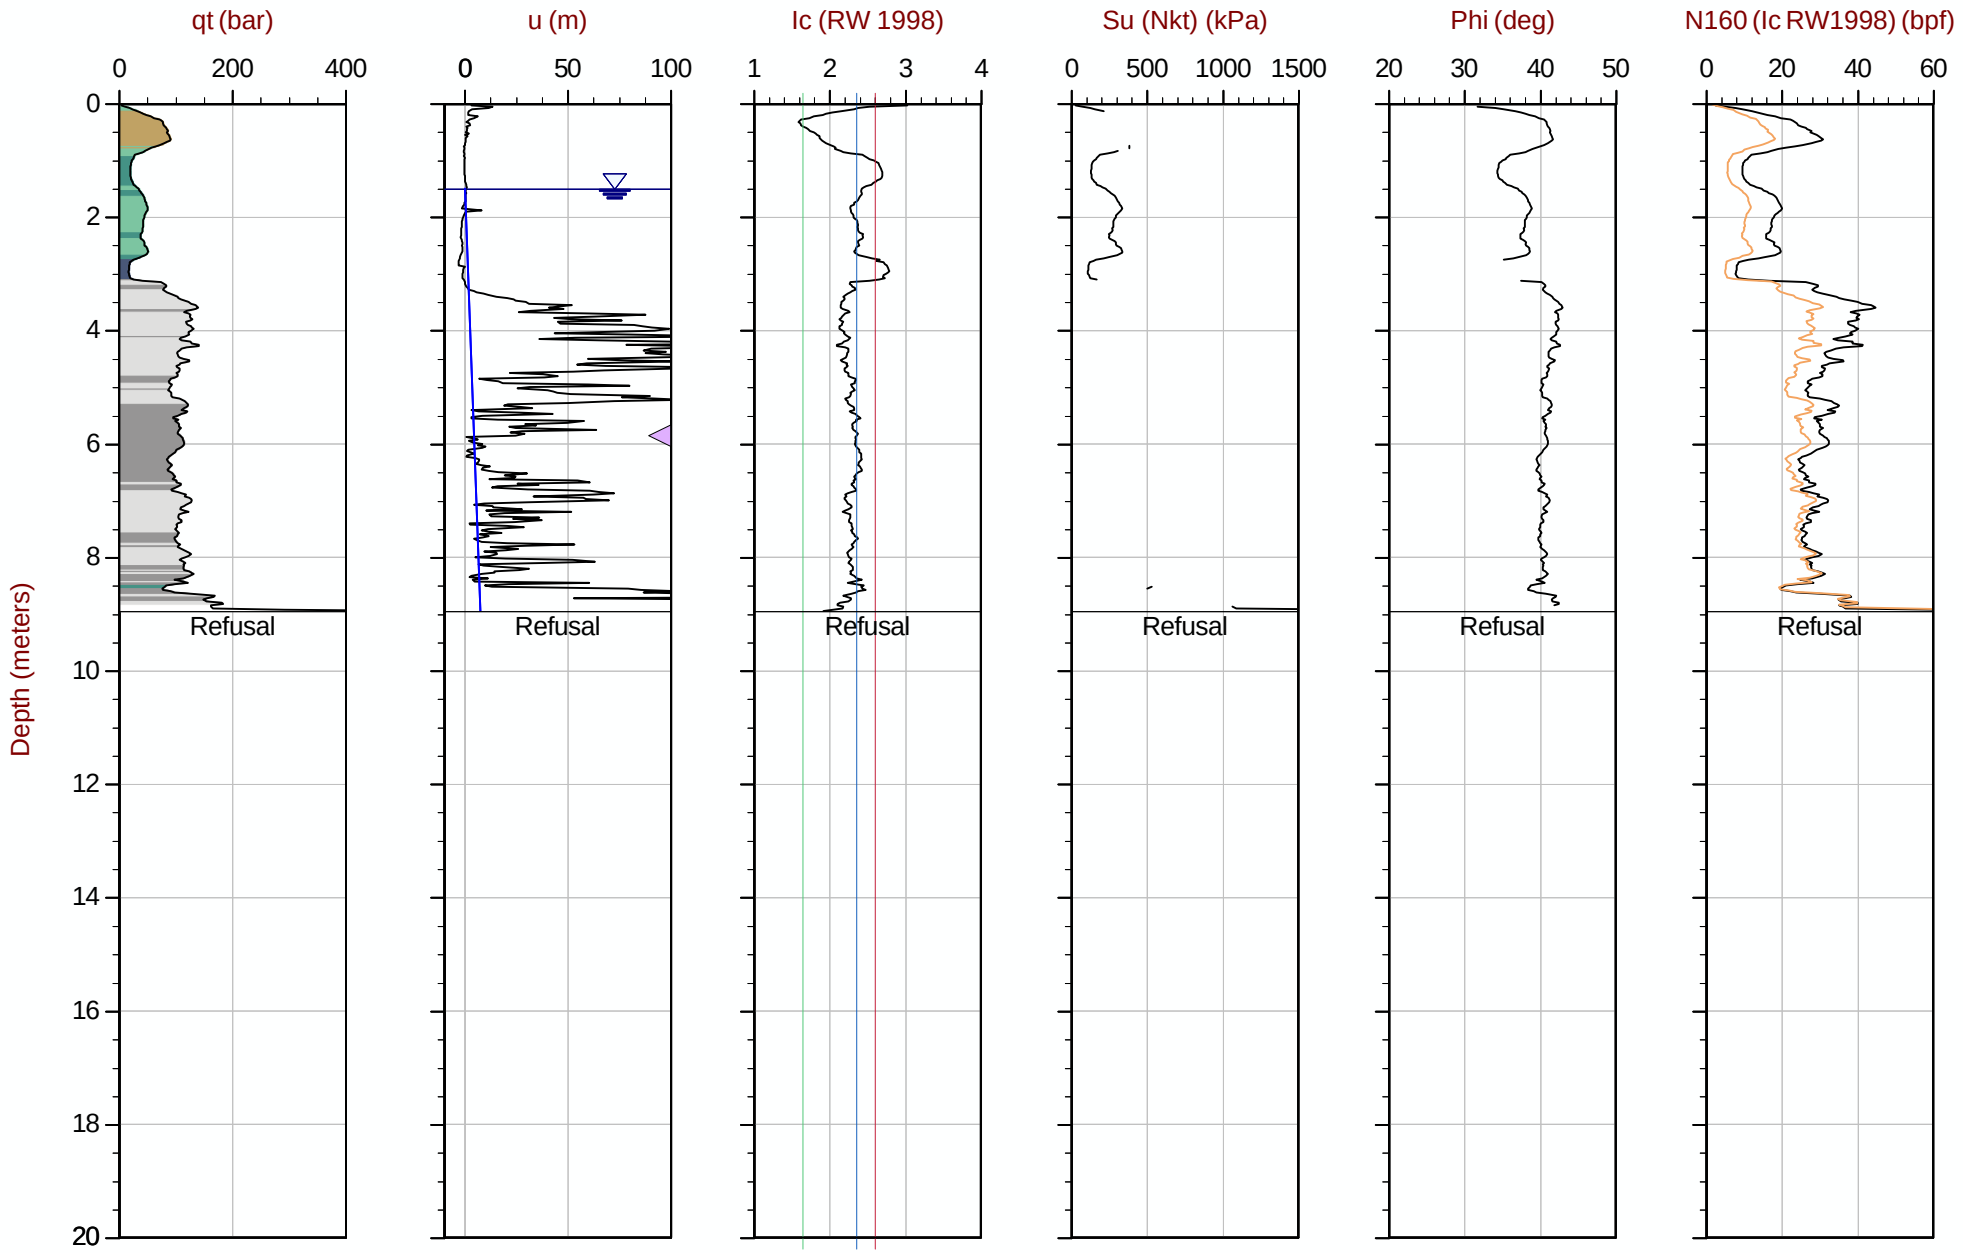

Max Depth: 8.950 m / 29.36 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT318.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609470m E: 415843m Elev: 772.837m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 07:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT319
Cone: 854:T1500F15U35 Area= 15cm2

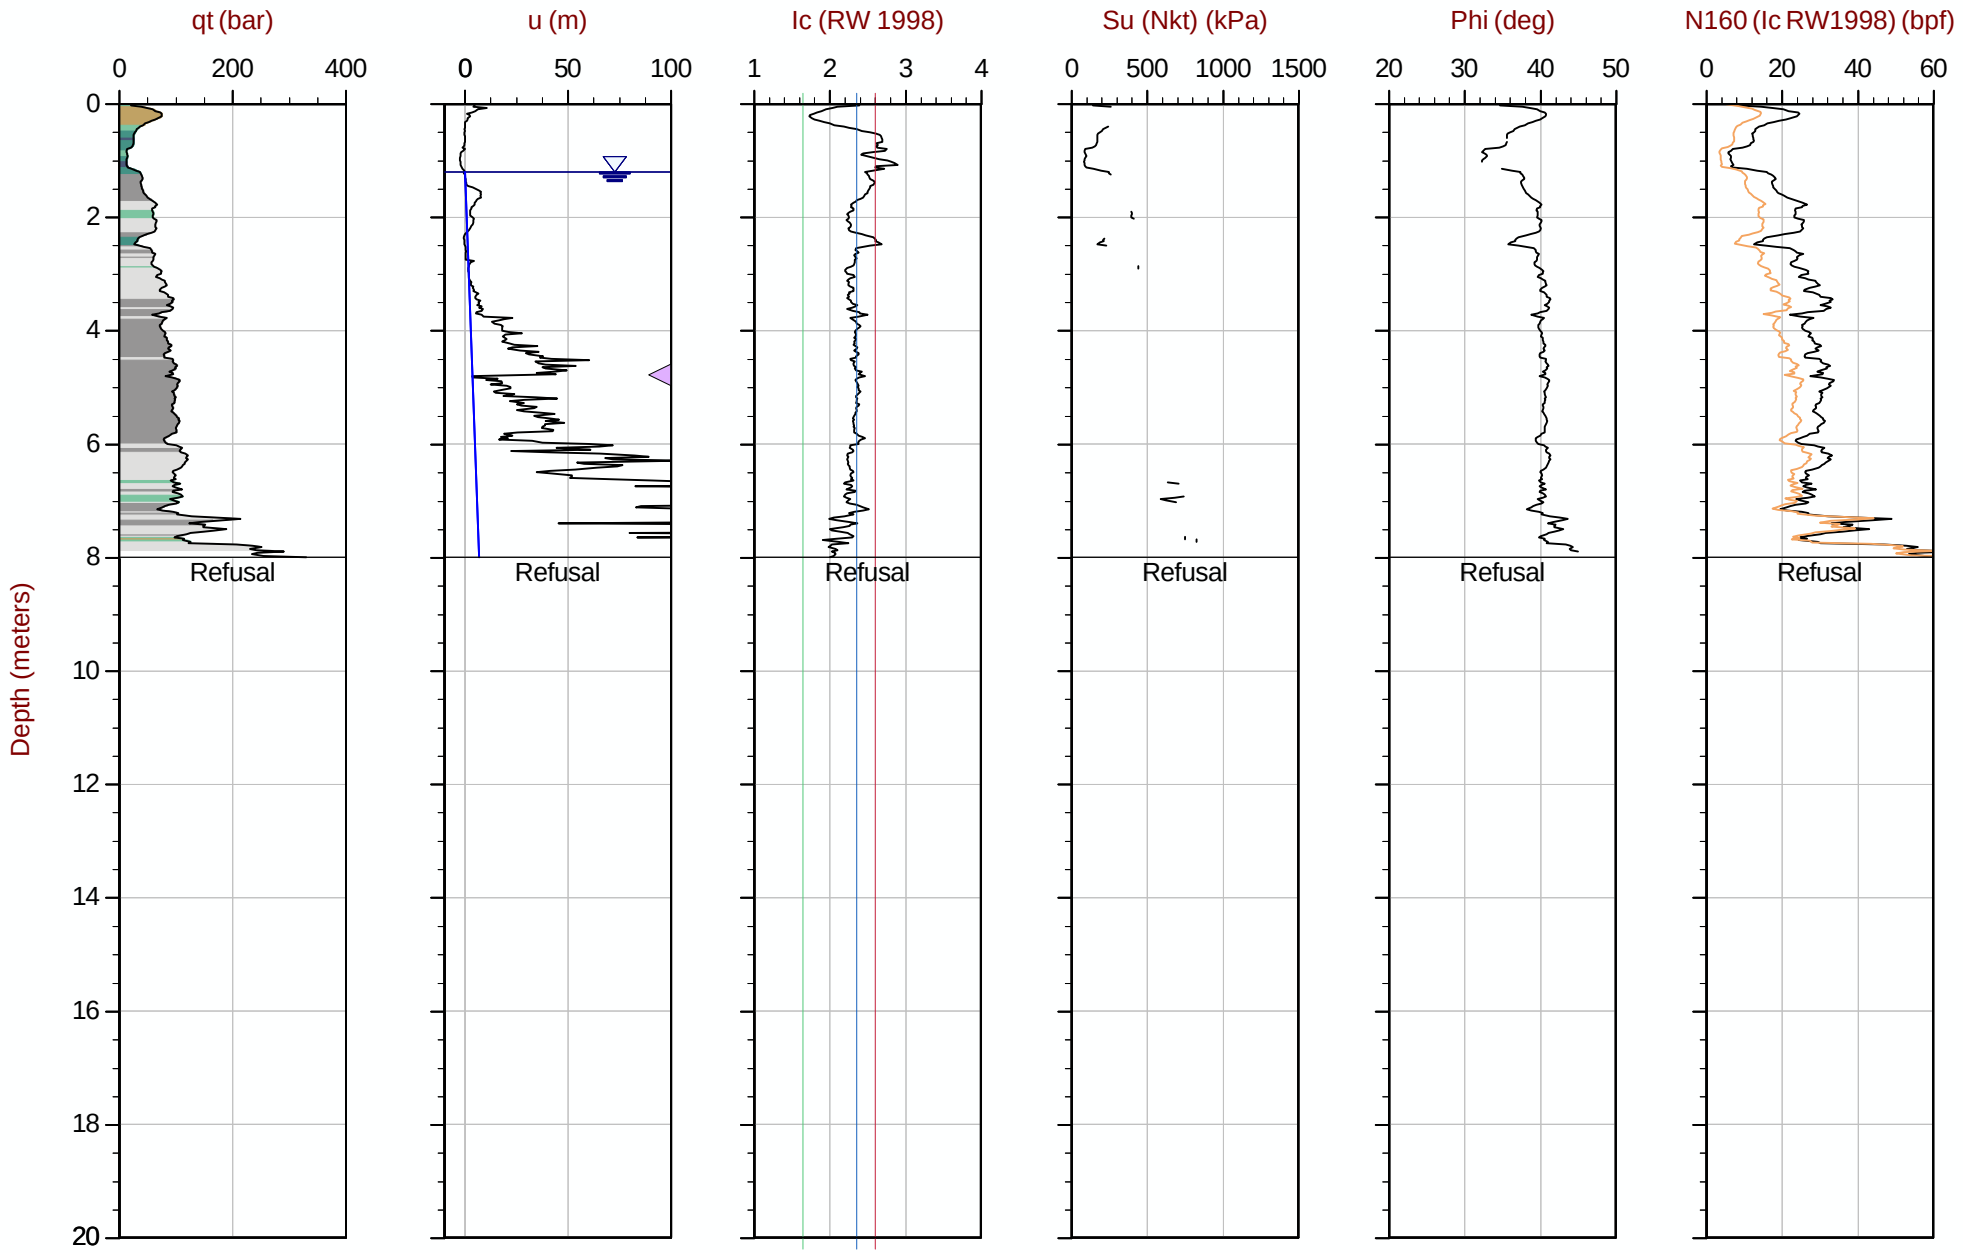

Max Depth: 8.000 m / 26.25 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT319.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609469m E: 415790m Elev: 772.623m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 08:23
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT320
Cone: 854:T1500F15U35 Area= 15cm2

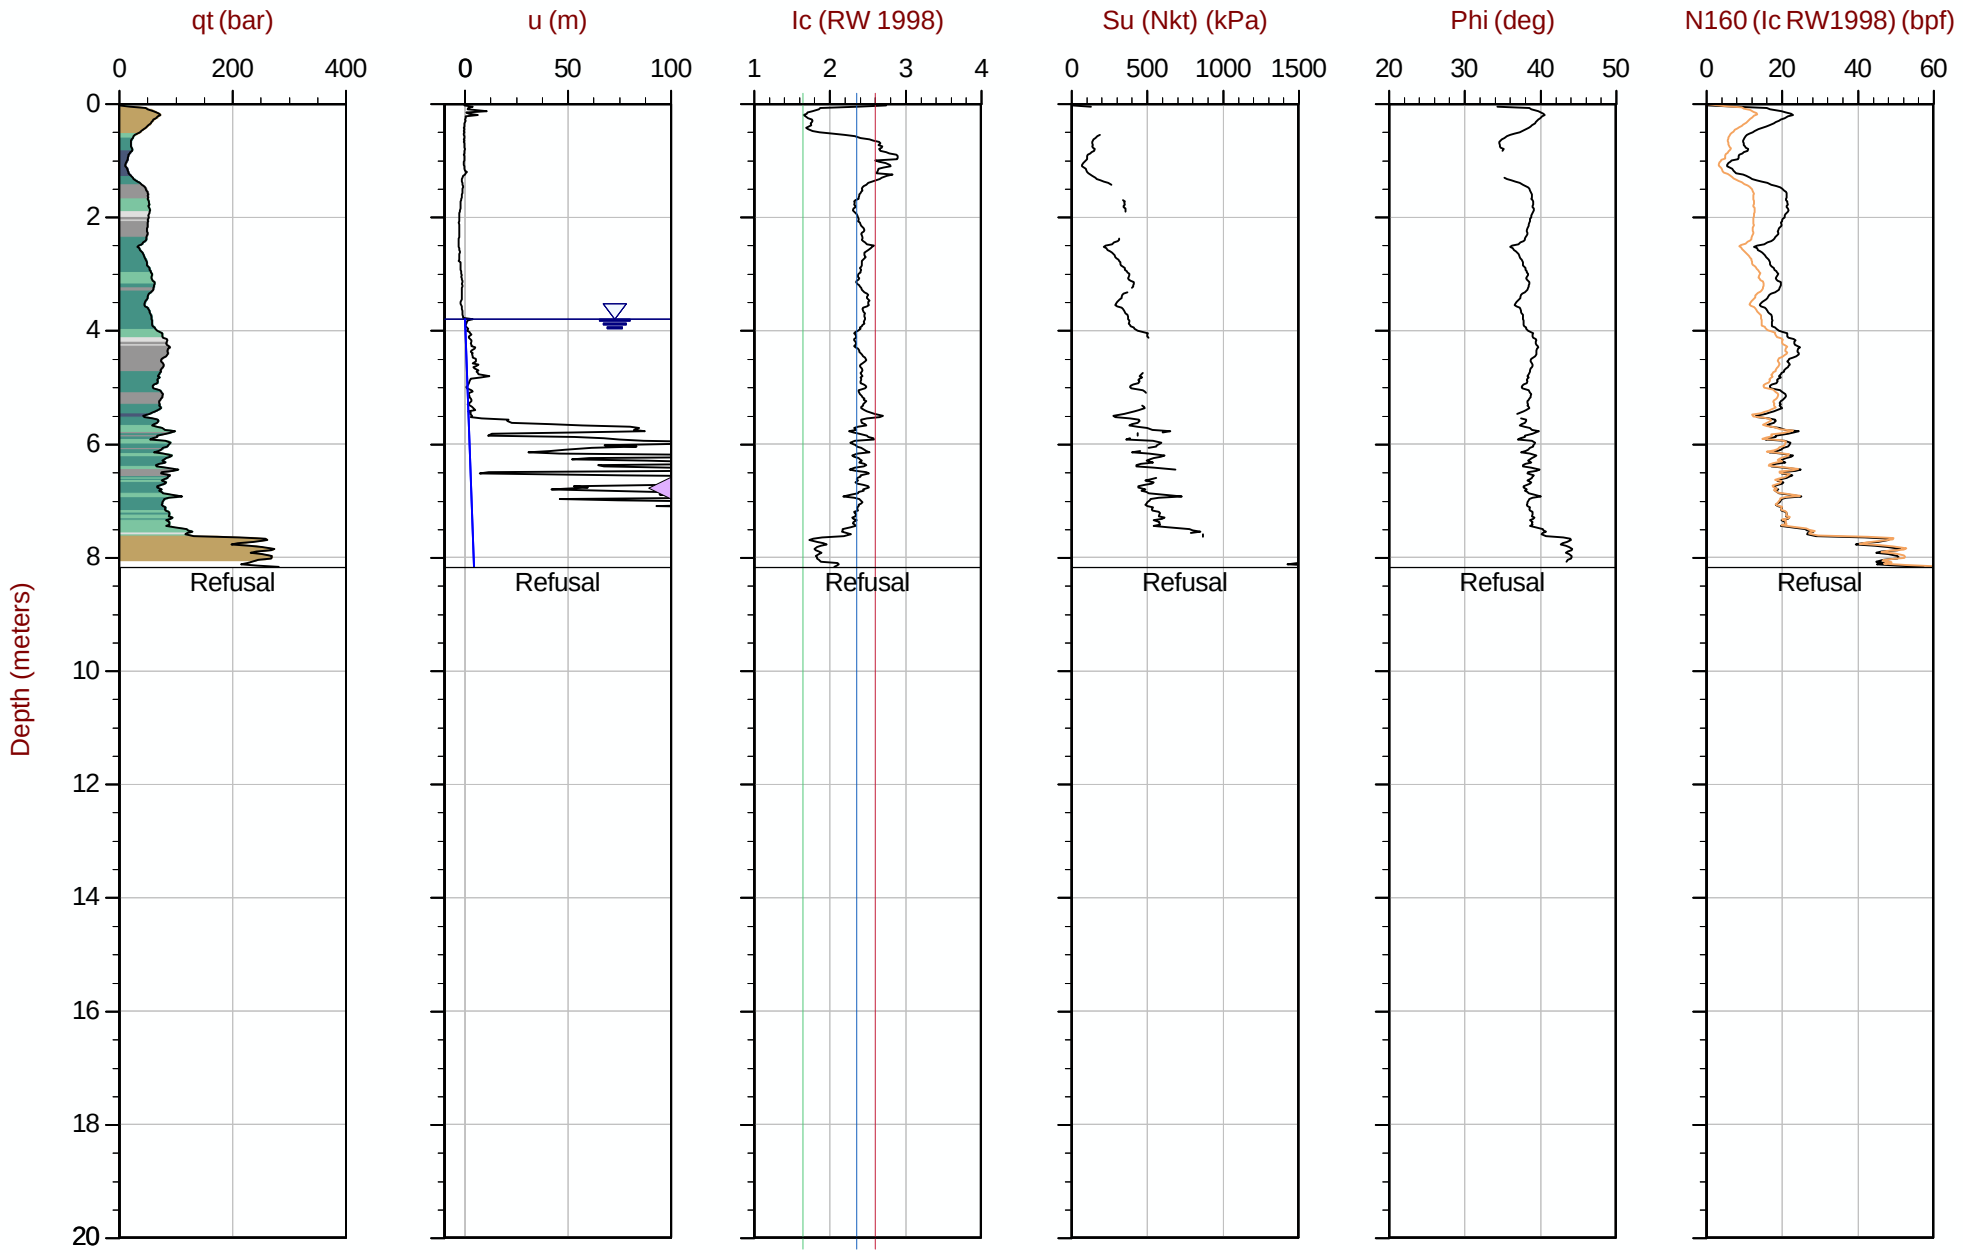

Max Depth: 8.175 m / 26.82 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT320.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609467m E: 415743m Elev: 773.059m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 10:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT321
Cone: 854:T1500F15U35 Area= 15cm2

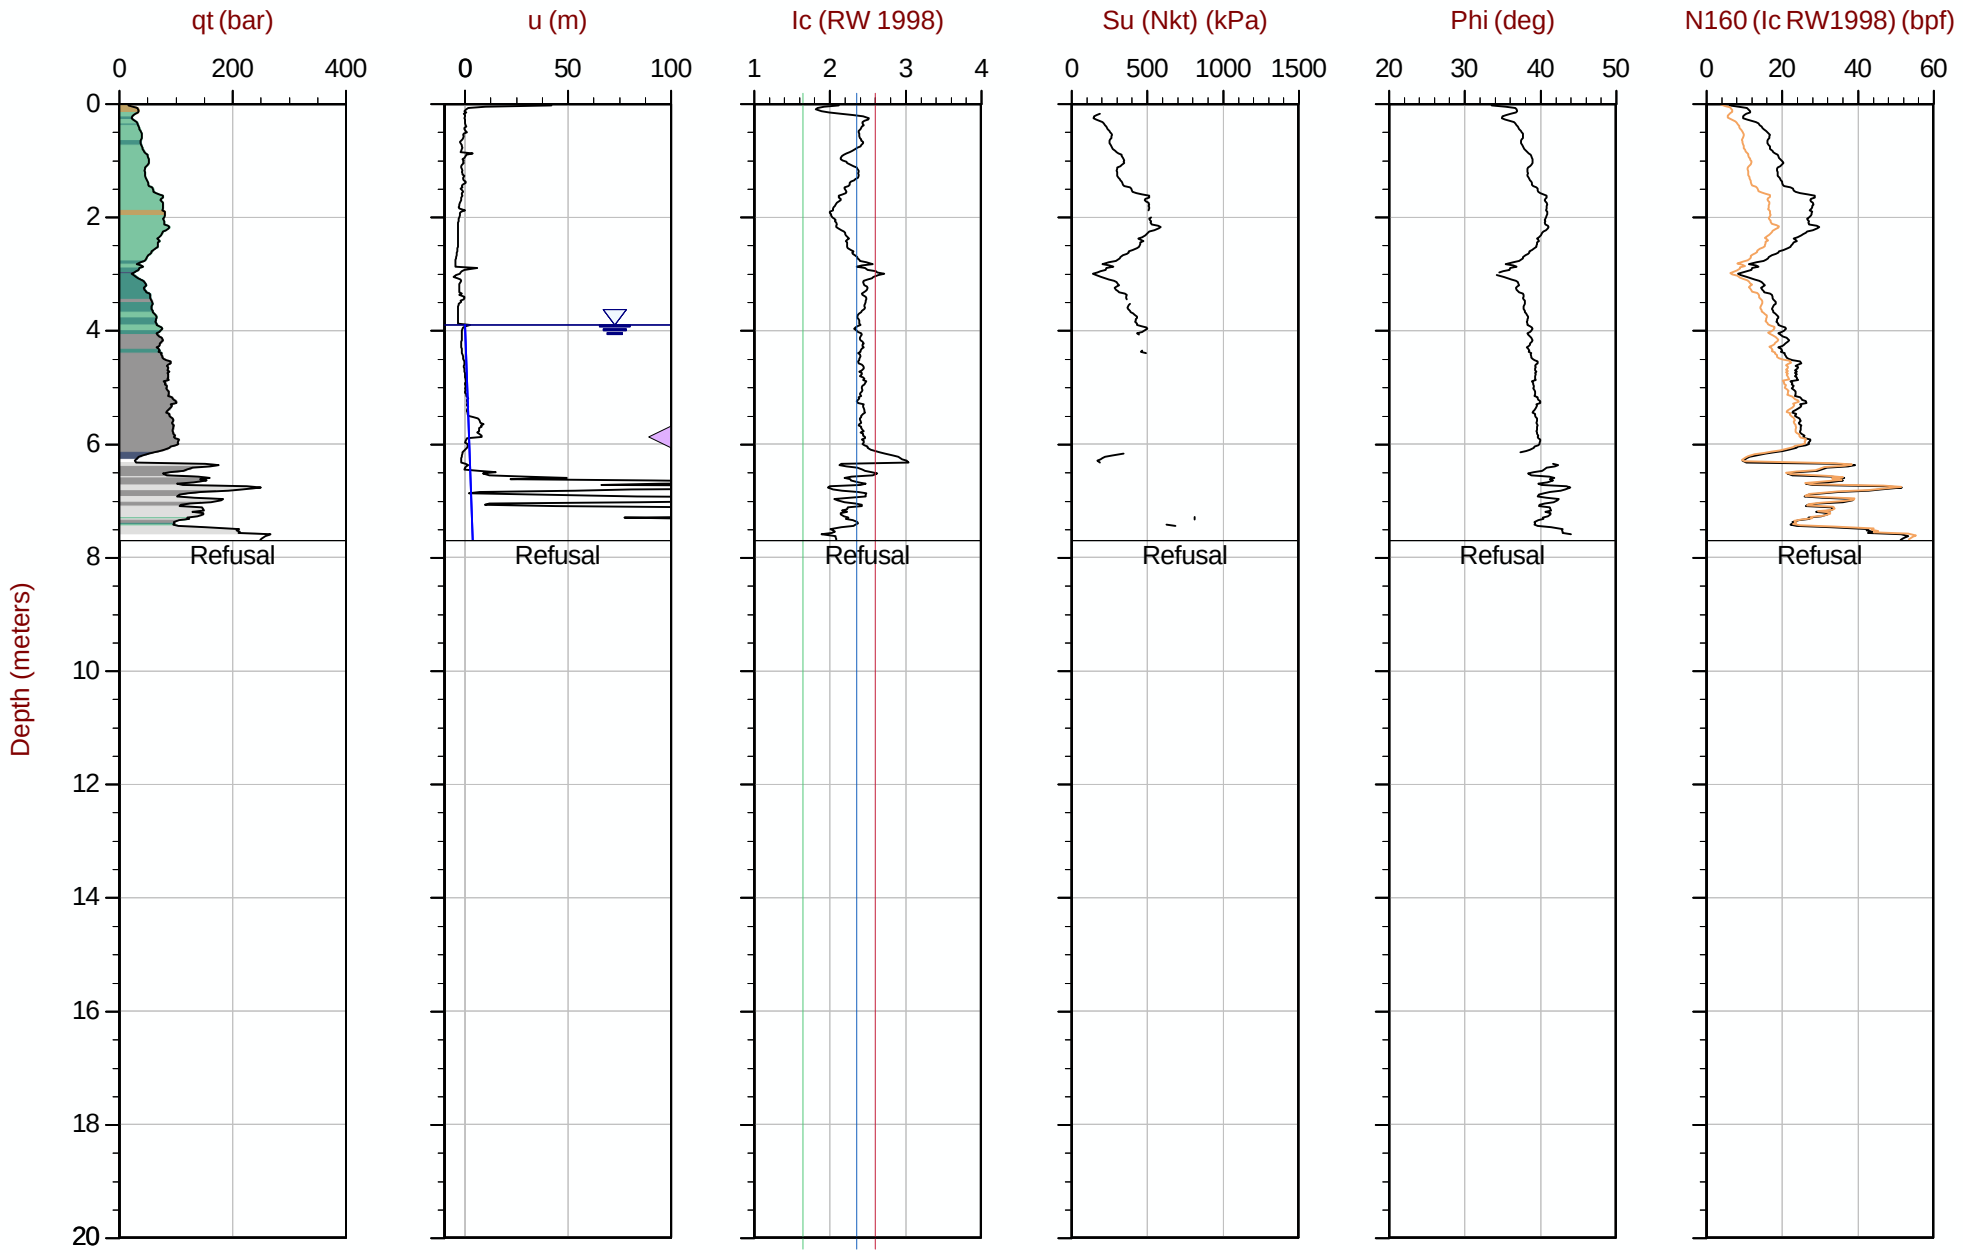

Max Depth: 7.700 m / 25.26 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT321.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609466m E: 415699m Elev: 773.420m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 11:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT322
Cone: 854:T1500F15U35 Area= 15cm2

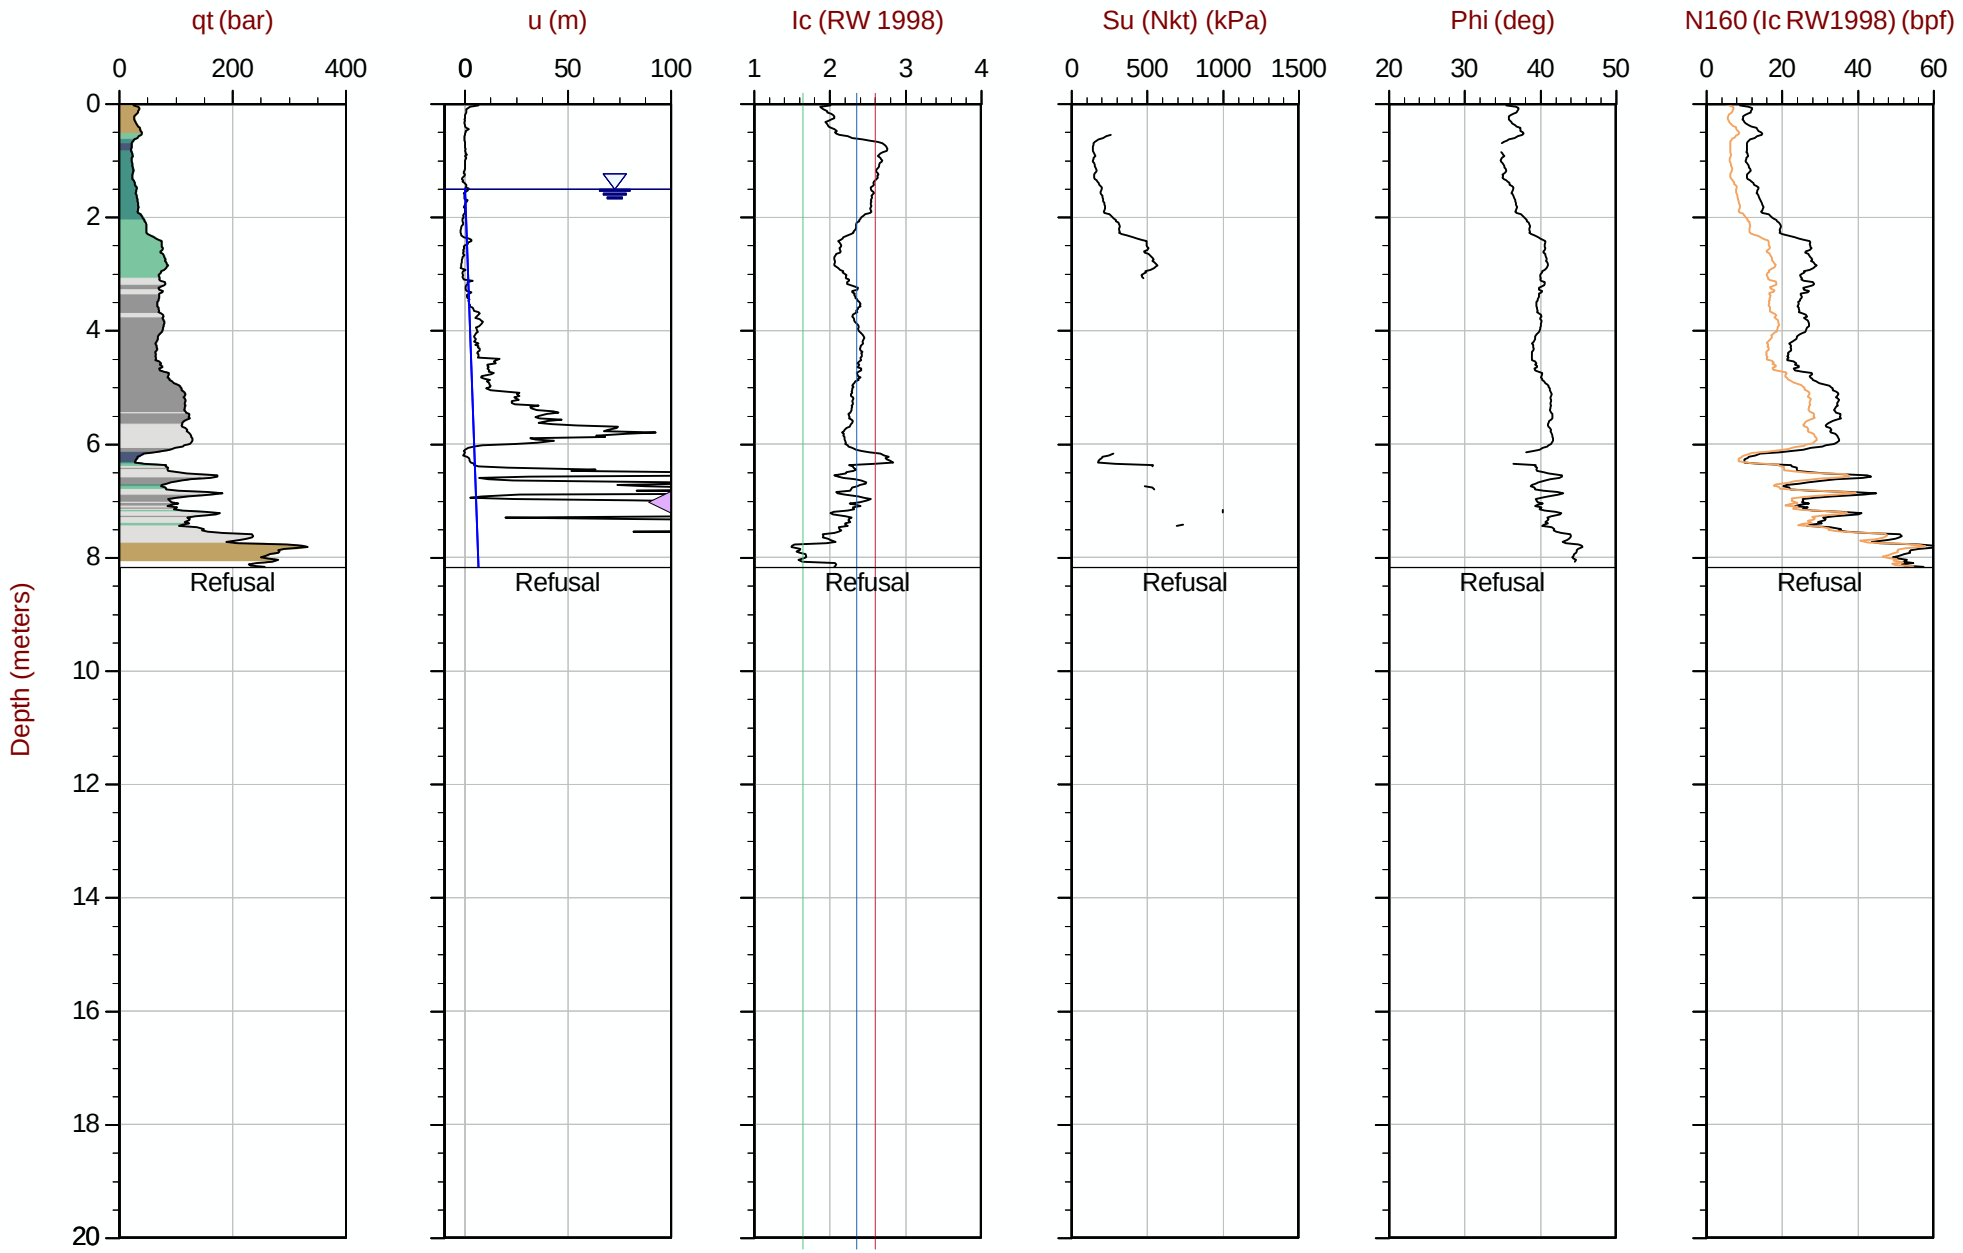

Max Depth: 8.175 m / 26.82 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT322.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609465m E: 415643m Elev: 773.799m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT323
Cone: 854:T1500F15U35 Area= 15cm2

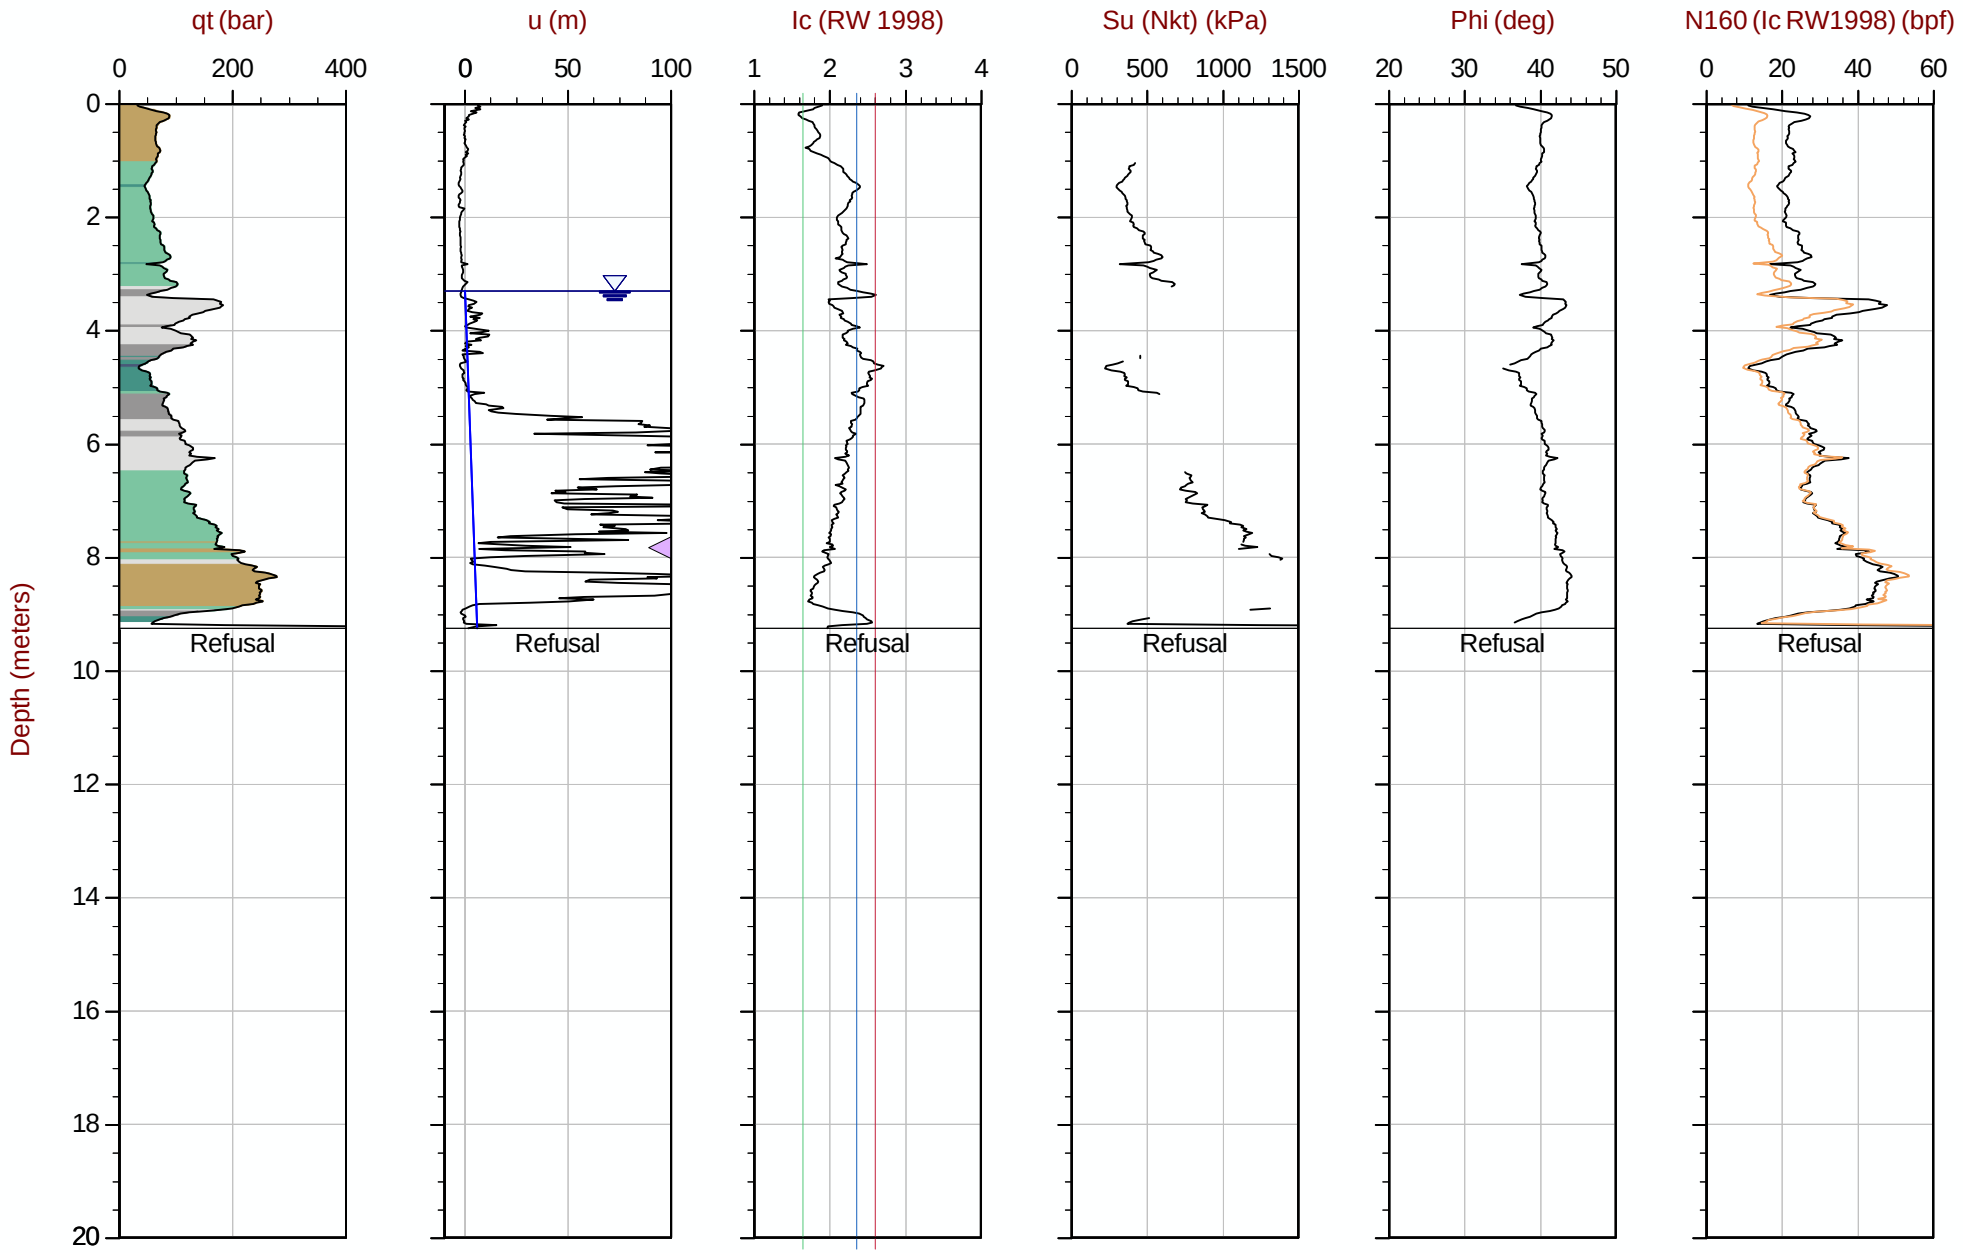

Max Depth: 9.250 m / 30.35 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT323.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609463m E: 415593m Elev: 774.098m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 13:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT324
Cone: 854:T1500F15U35 Area= 15cm2

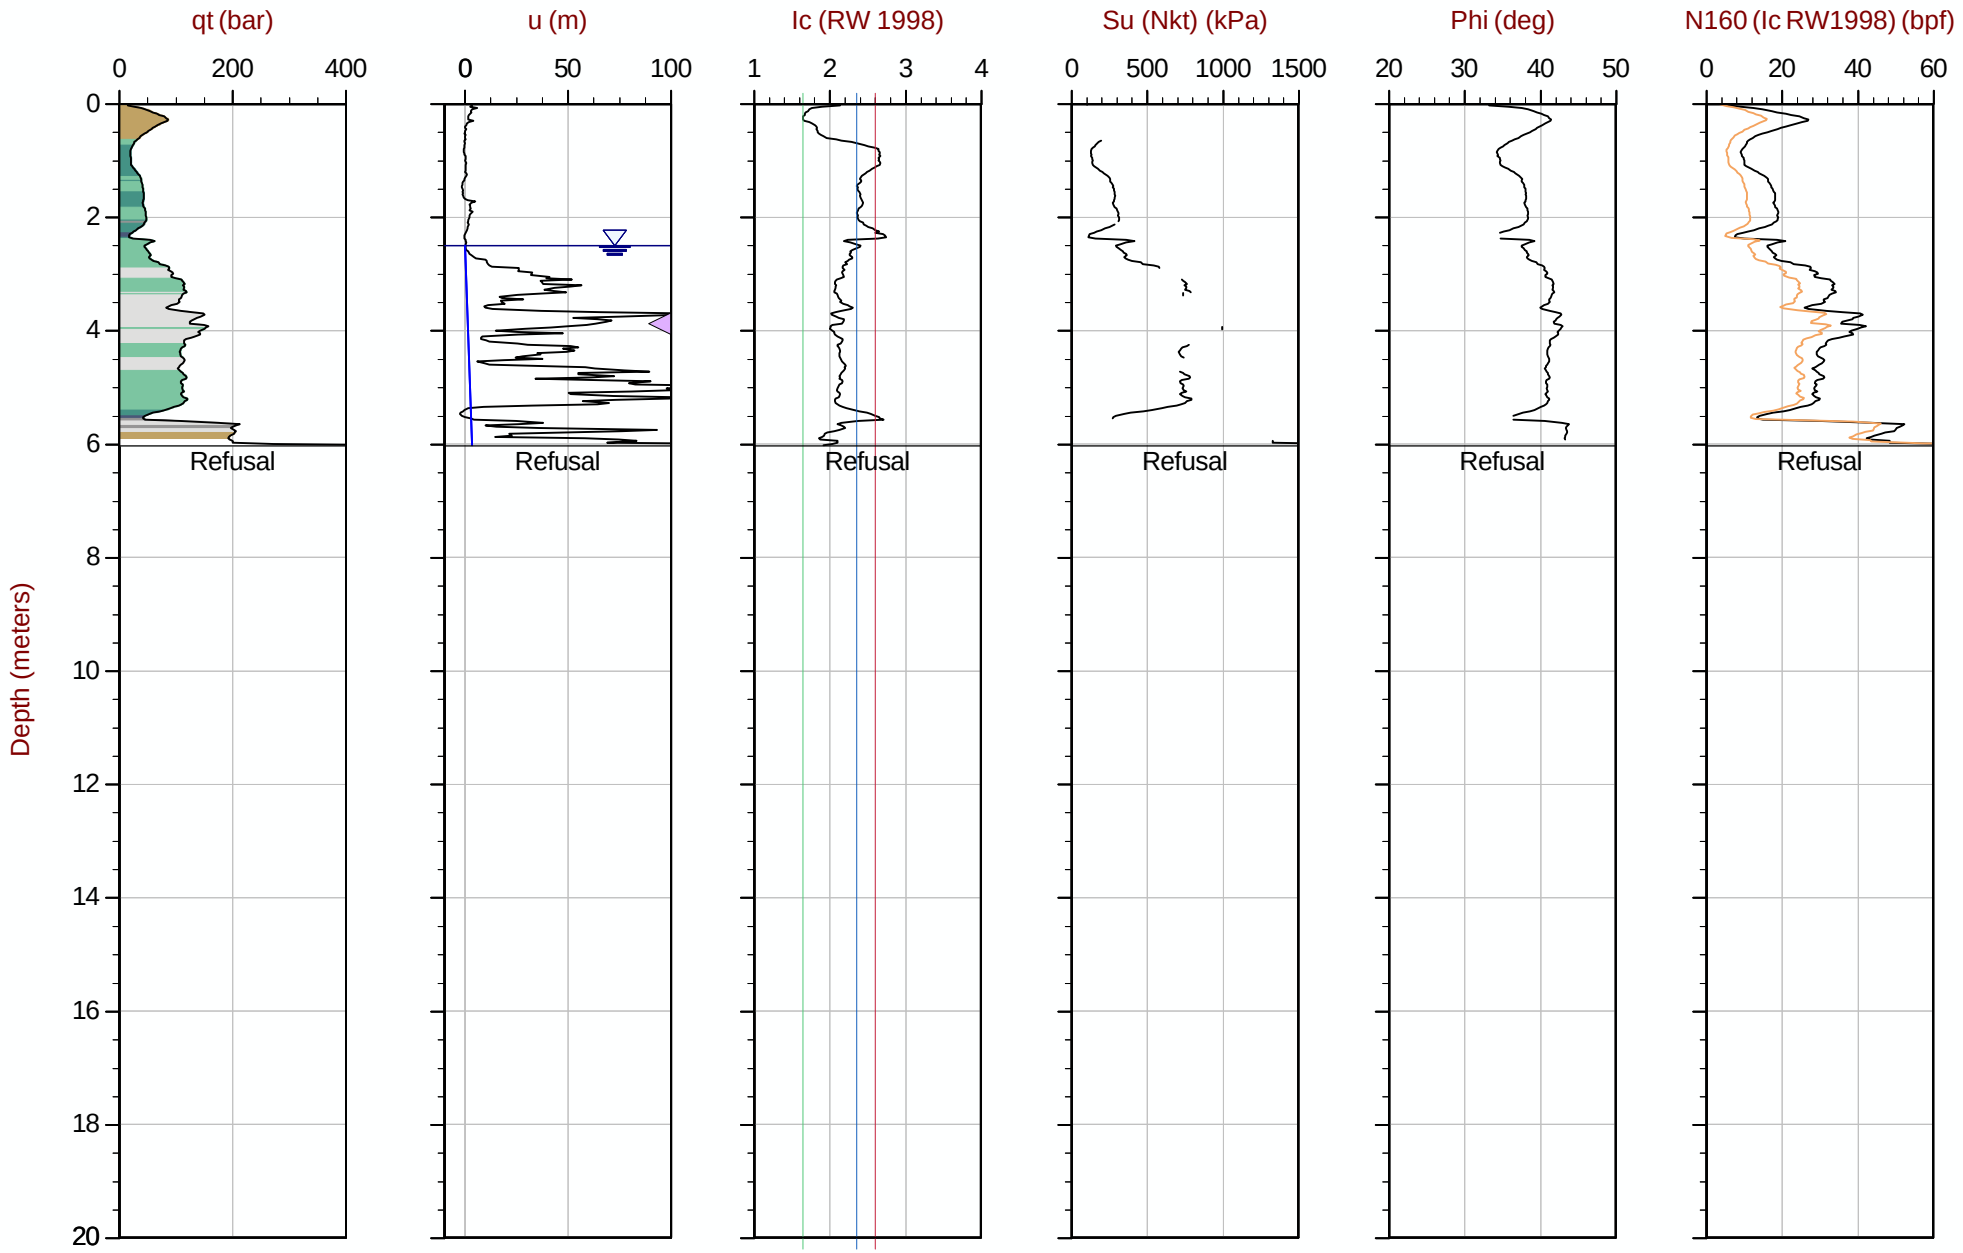

Max Depth: 6.025 m / 19.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT324.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609462m E: 415543m Elev: 773.957m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 16:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT325
Cone: 854:T1500F15U35 Area= 15cm2

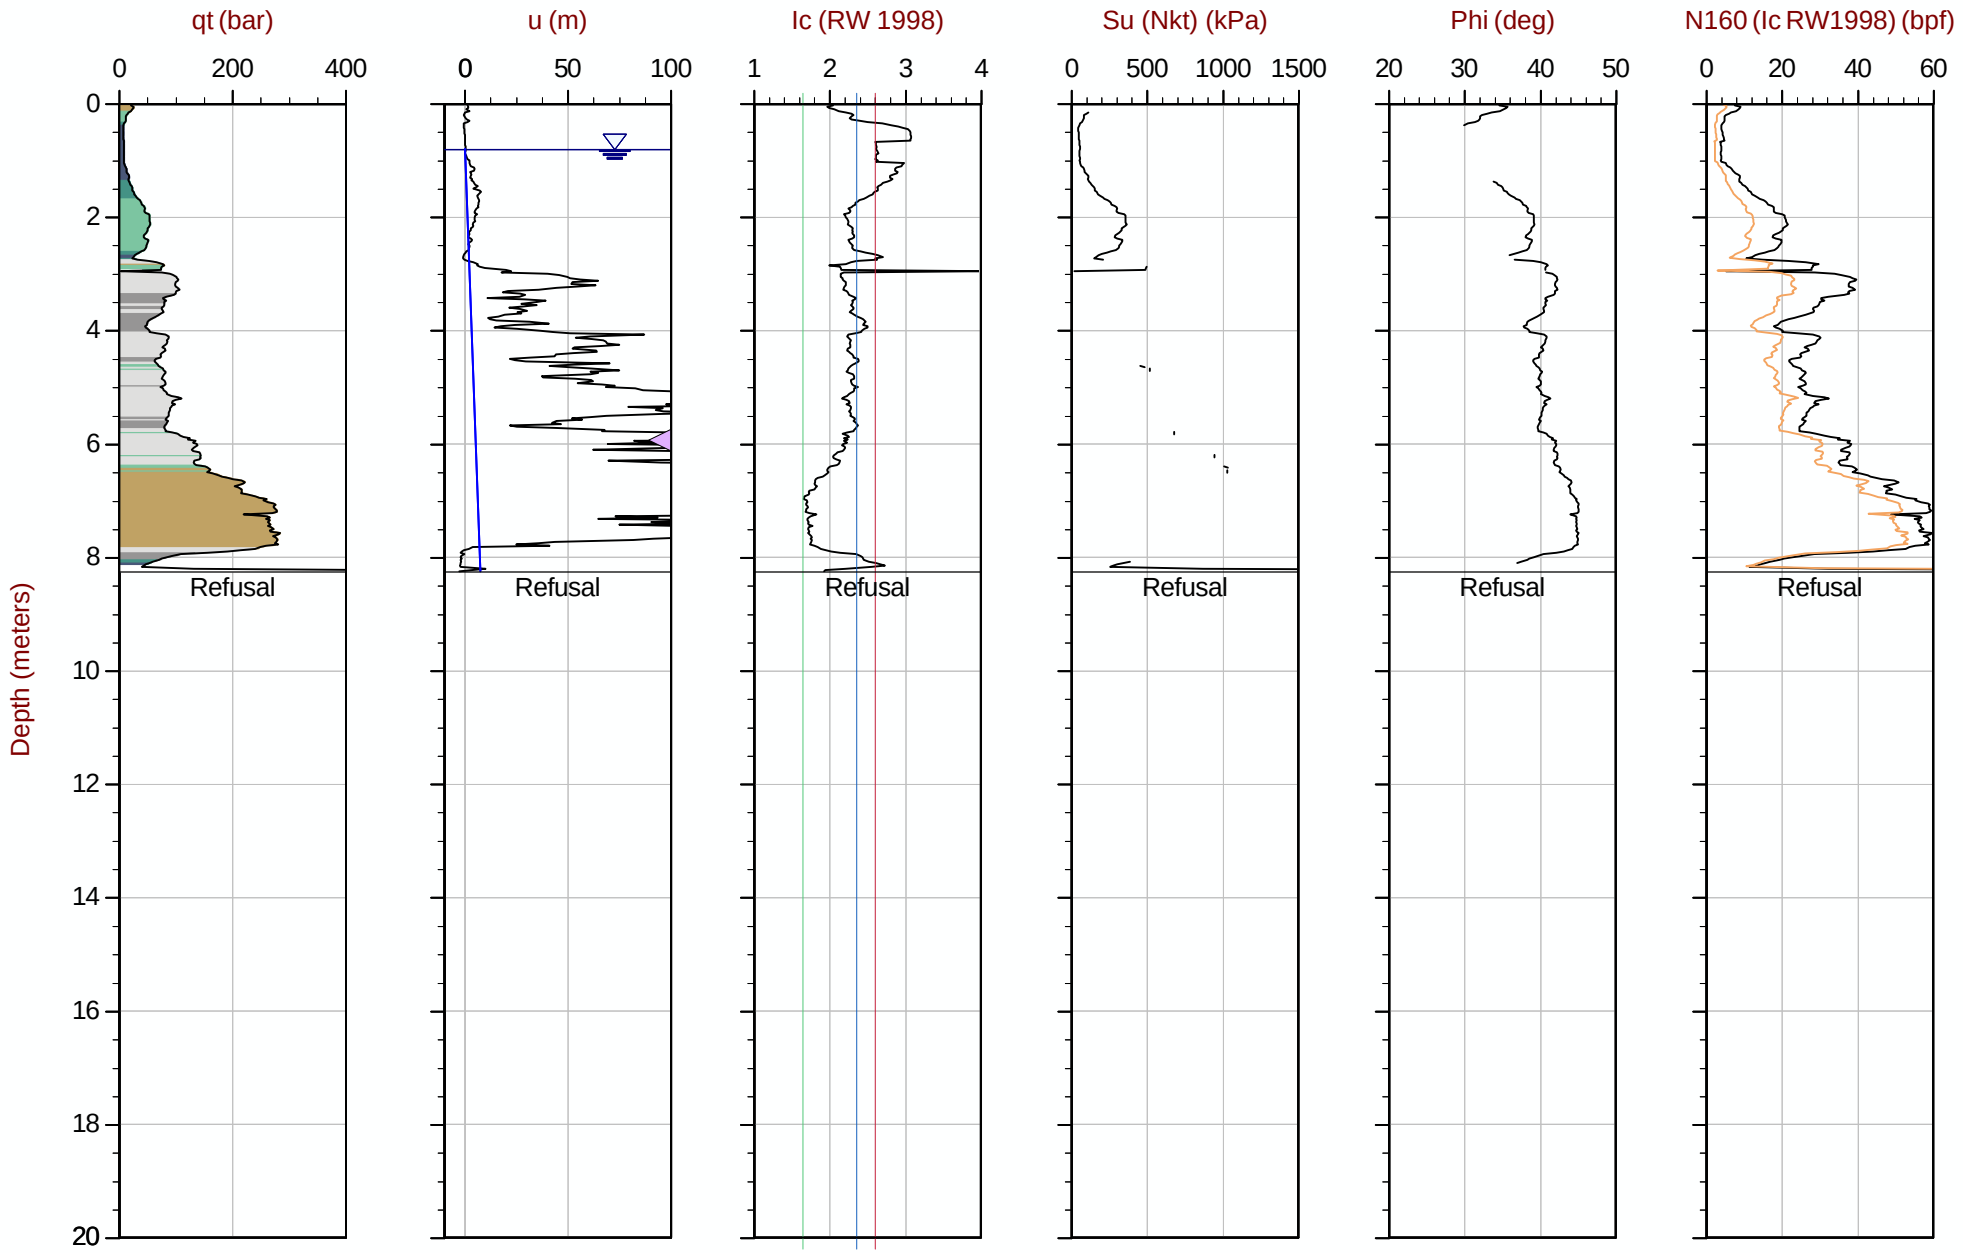

Max Depth: 8.250 m / 27.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT325.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609461m E: 415490m Elev: 774.165m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 07:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT326
Cone: 854:T1500F15U35 Area= 15cm2

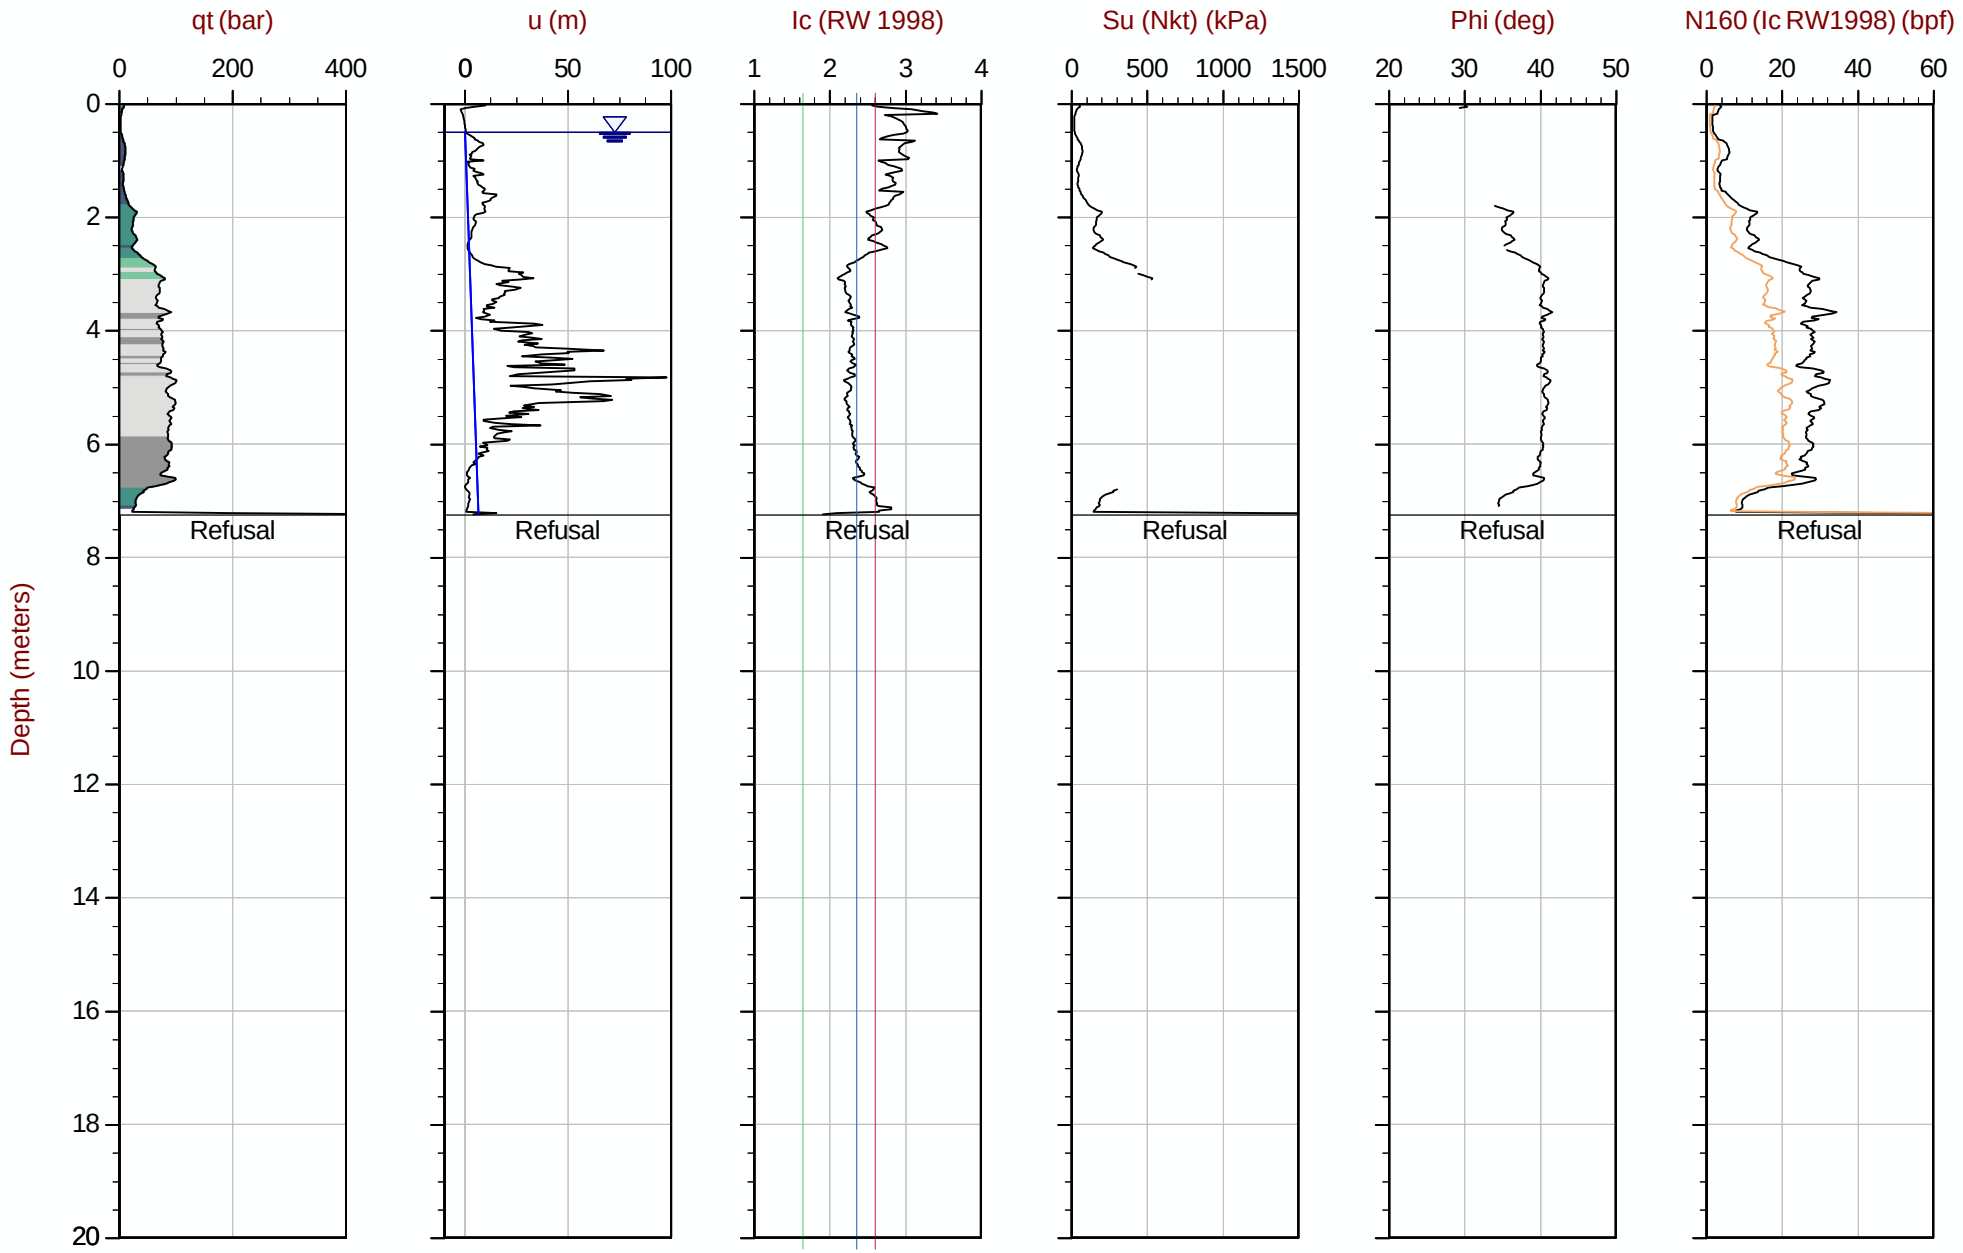

Max Depth: 7.250 m / 23.79 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT326.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609459m E: 415443m Elev: 773.975m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 09:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT327
Cone: 854:T1500F15U35 Area= 15cm2

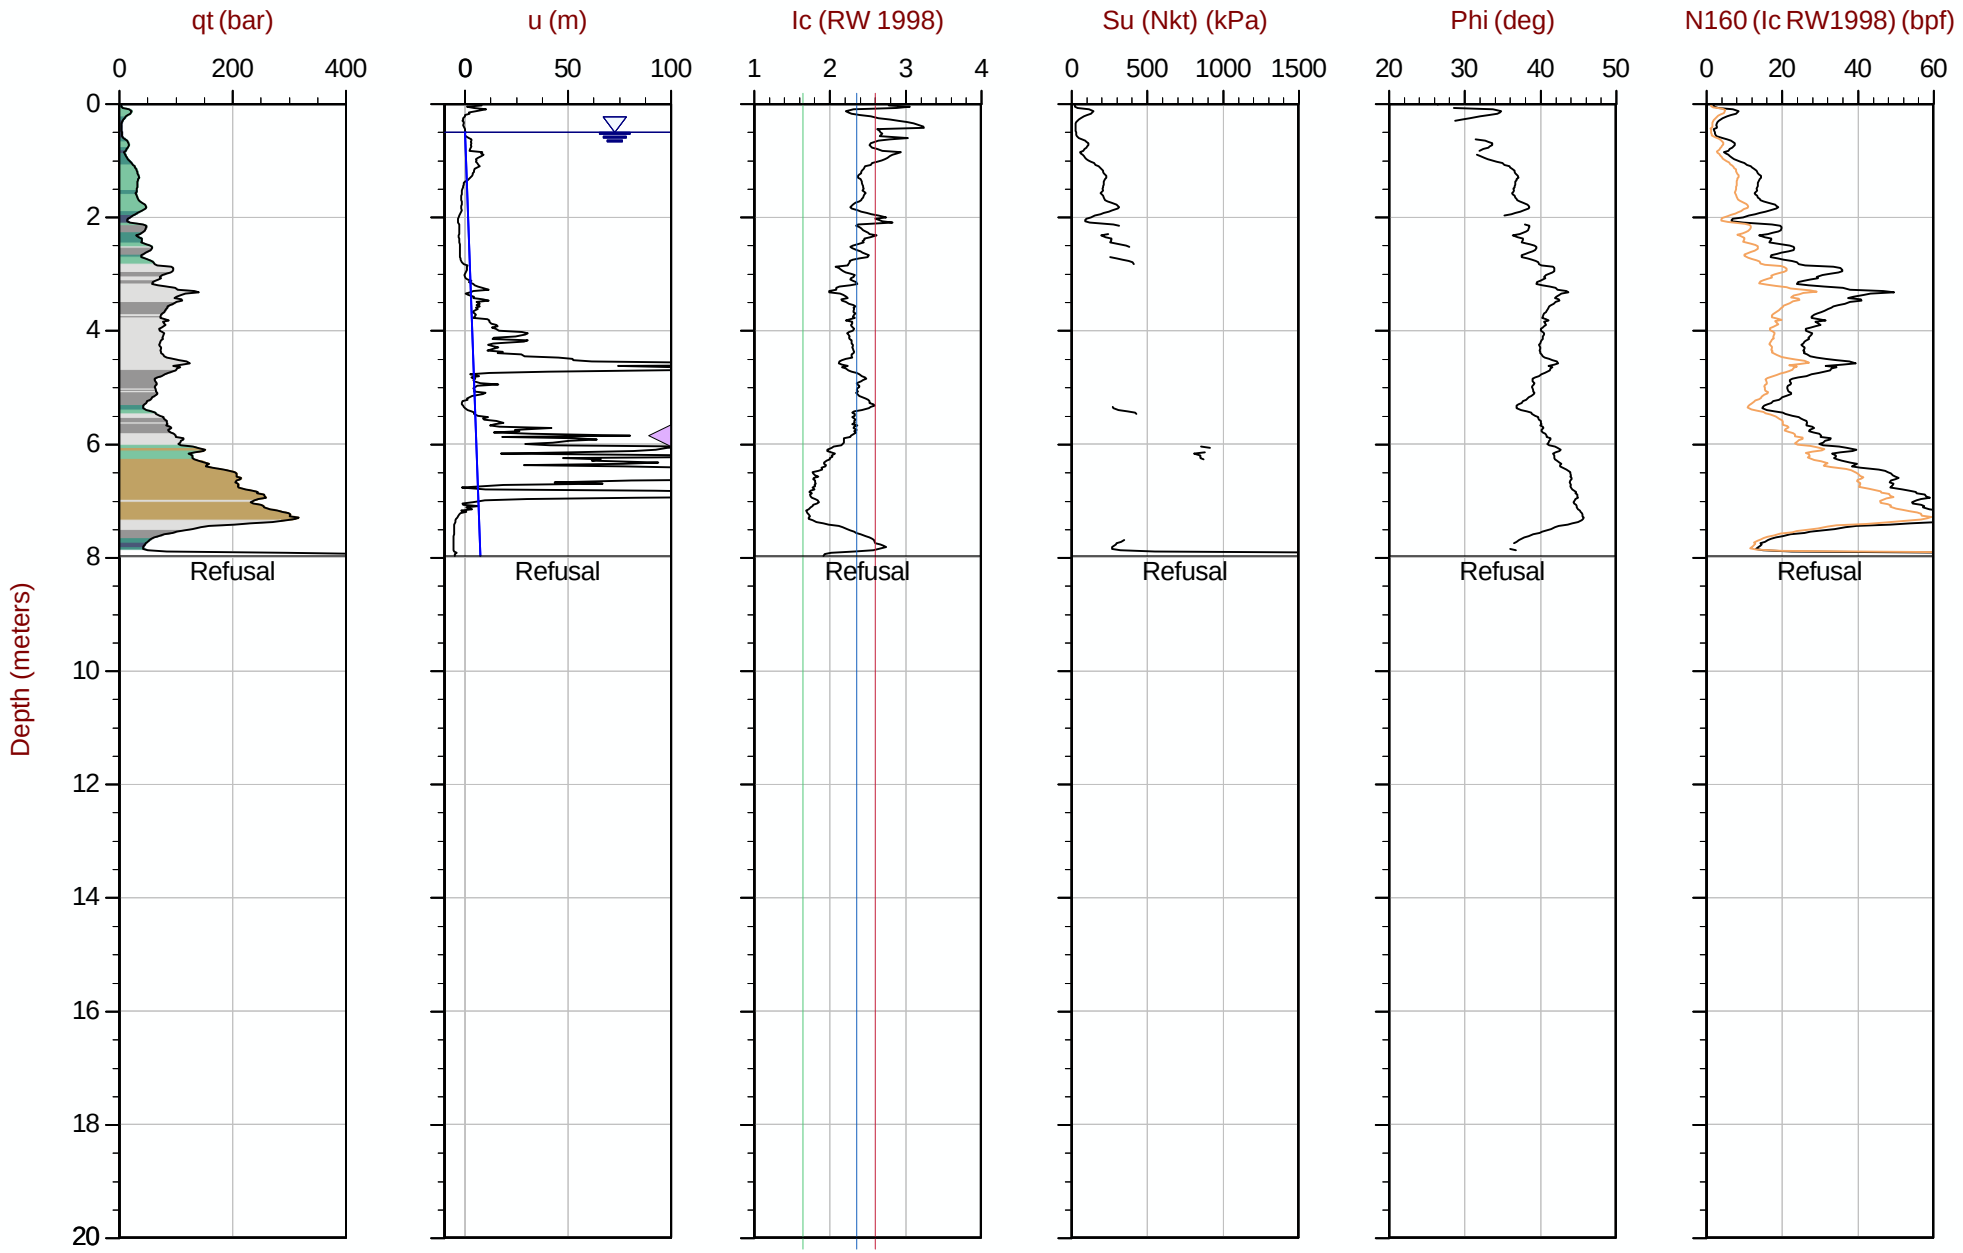

Max Depth: 7.975 m / 26.16 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT327.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609458m E: 415394m Elev: 774.321m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 10:28
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT328
Cone: 854:T1500F15U35 Area= 15cm2

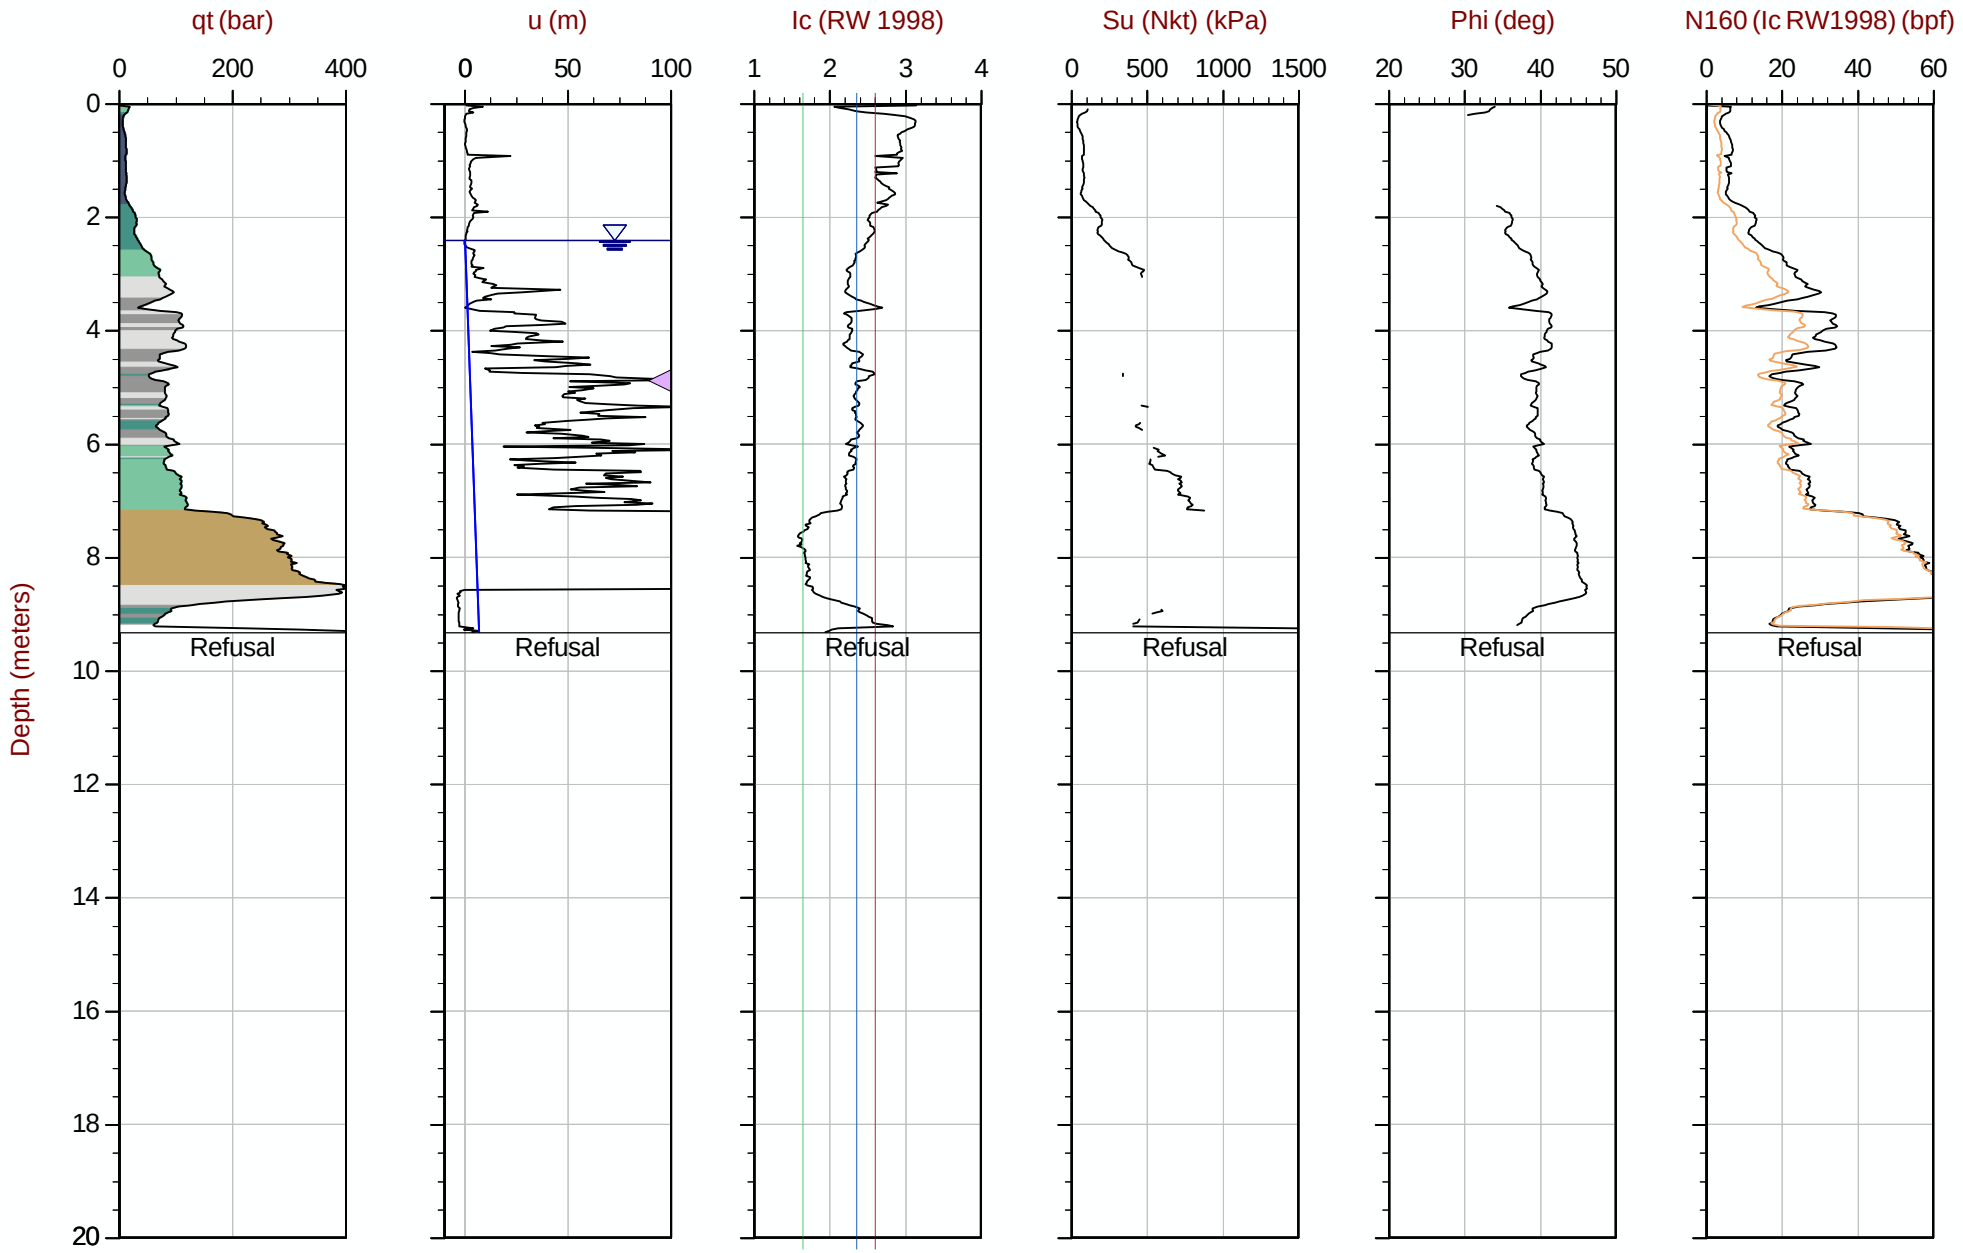

Max Depth: 9.325 m / 30.59 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT328.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609457m E: 415343m Elev: 774.726m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 12:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT329
Cone: 854:T1500F15U35 Area= 15cm2

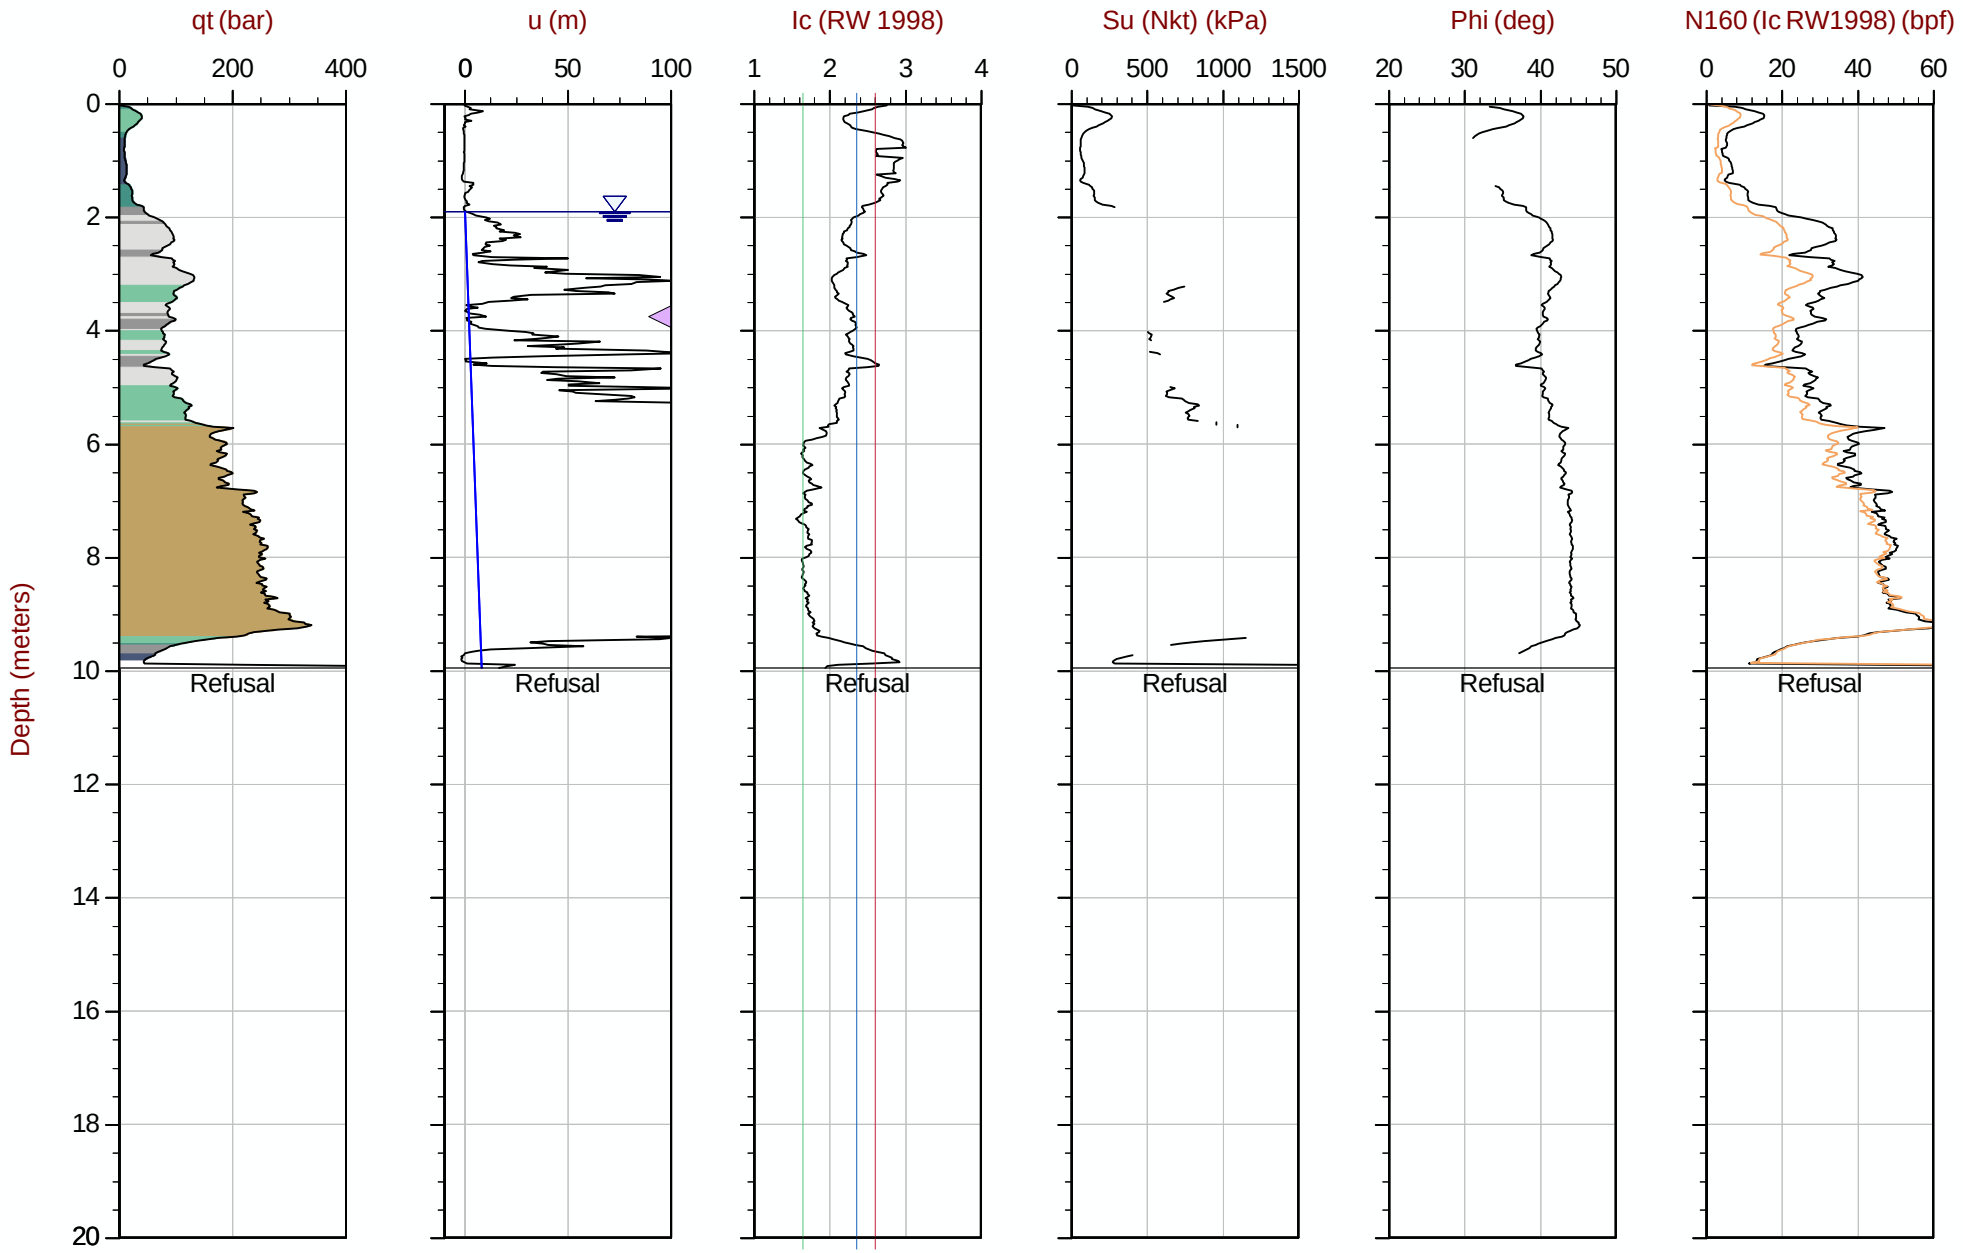

Max Depth: 9.950 m / 32.64 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT329.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609456m E: 415294m Elev: 775.162m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 14:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT330
Cone: 854:T1500F15U35 Area= 15cm2

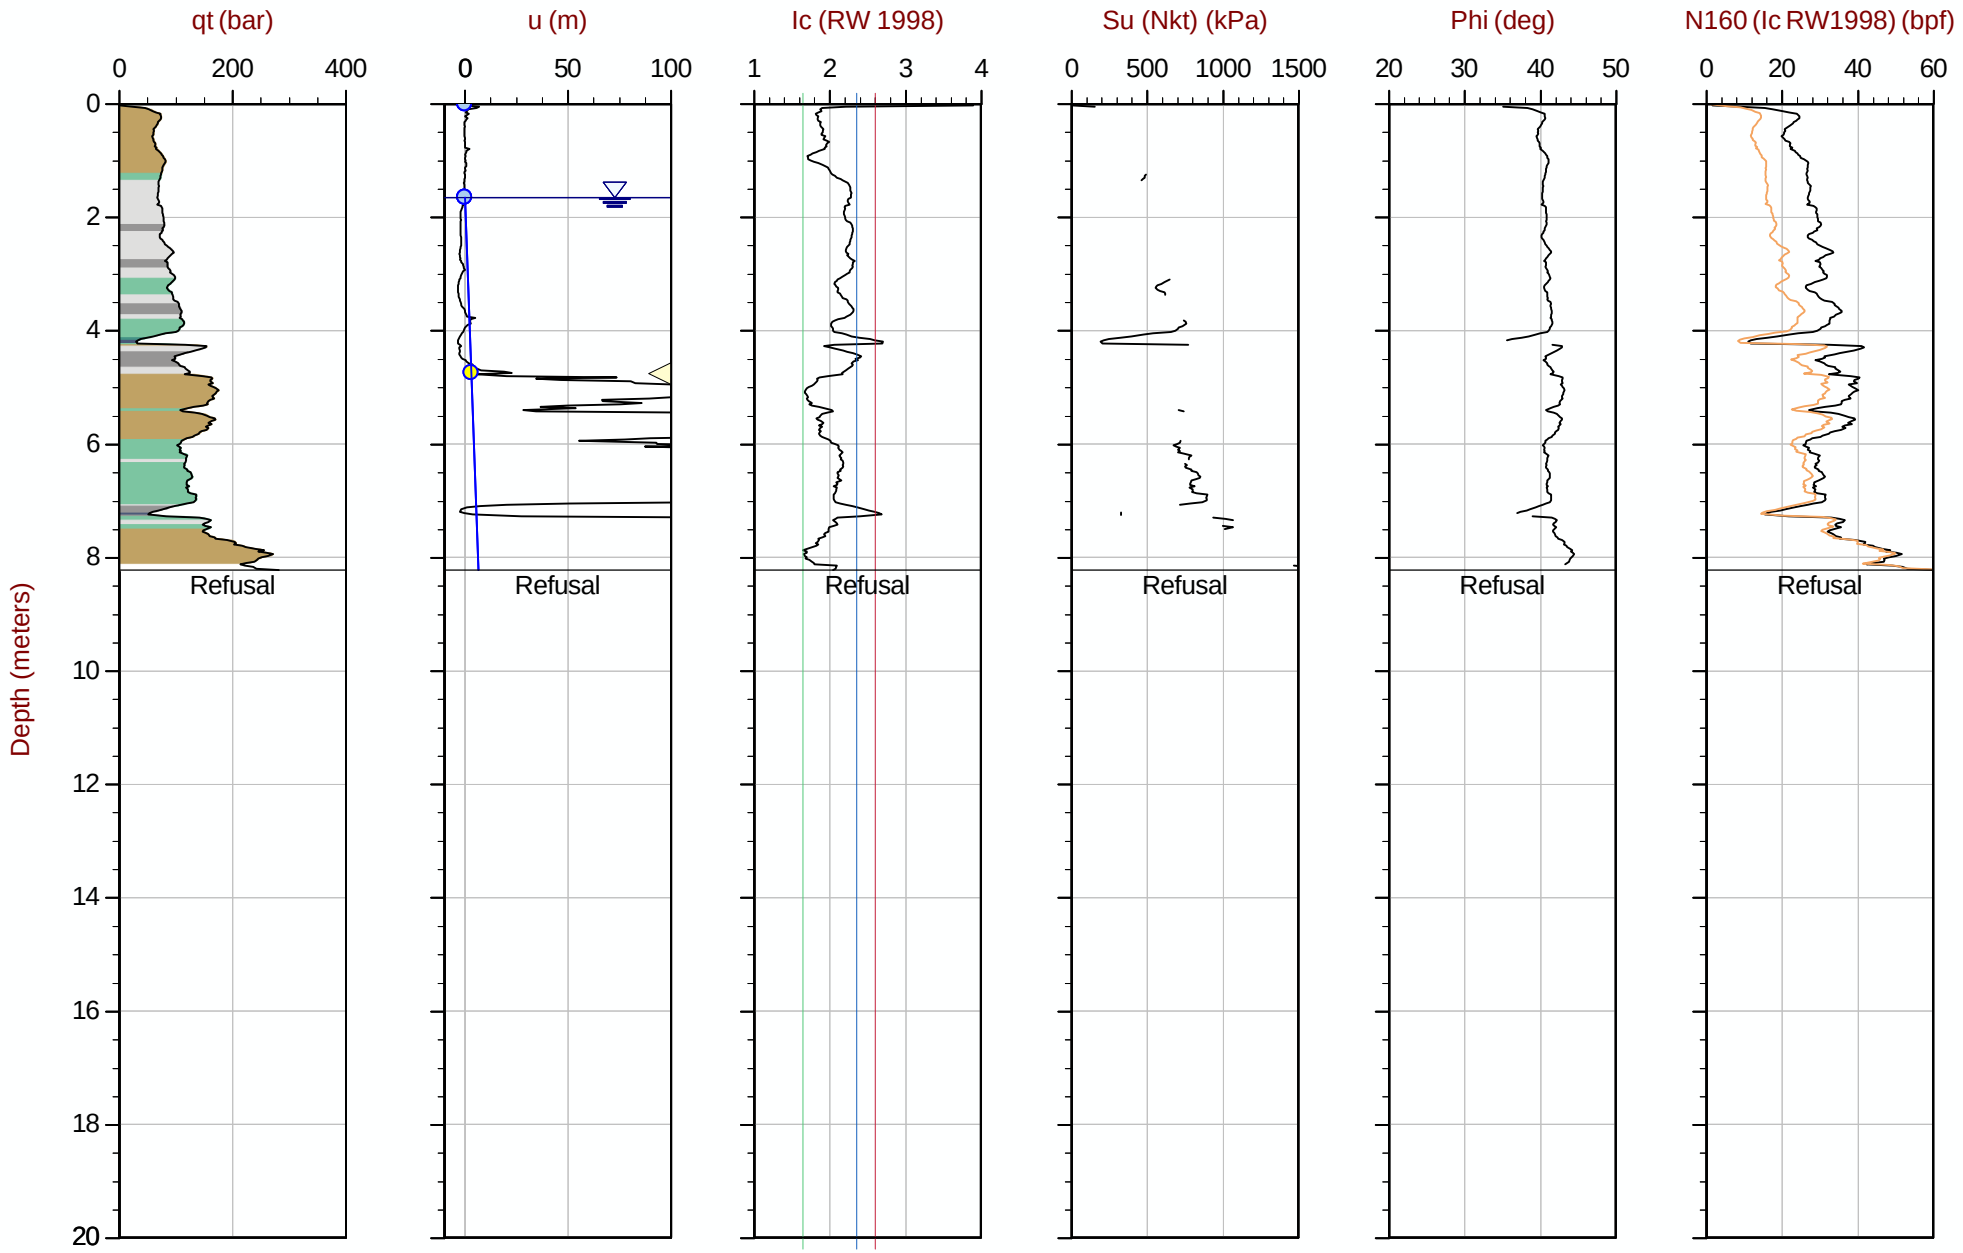

Max Depth: 8.225 m / 26.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT330.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609456m E: 415240m Elev: 776.805m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 16:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT331
Cone: 854:T1500F15U35 Area= 15cm2

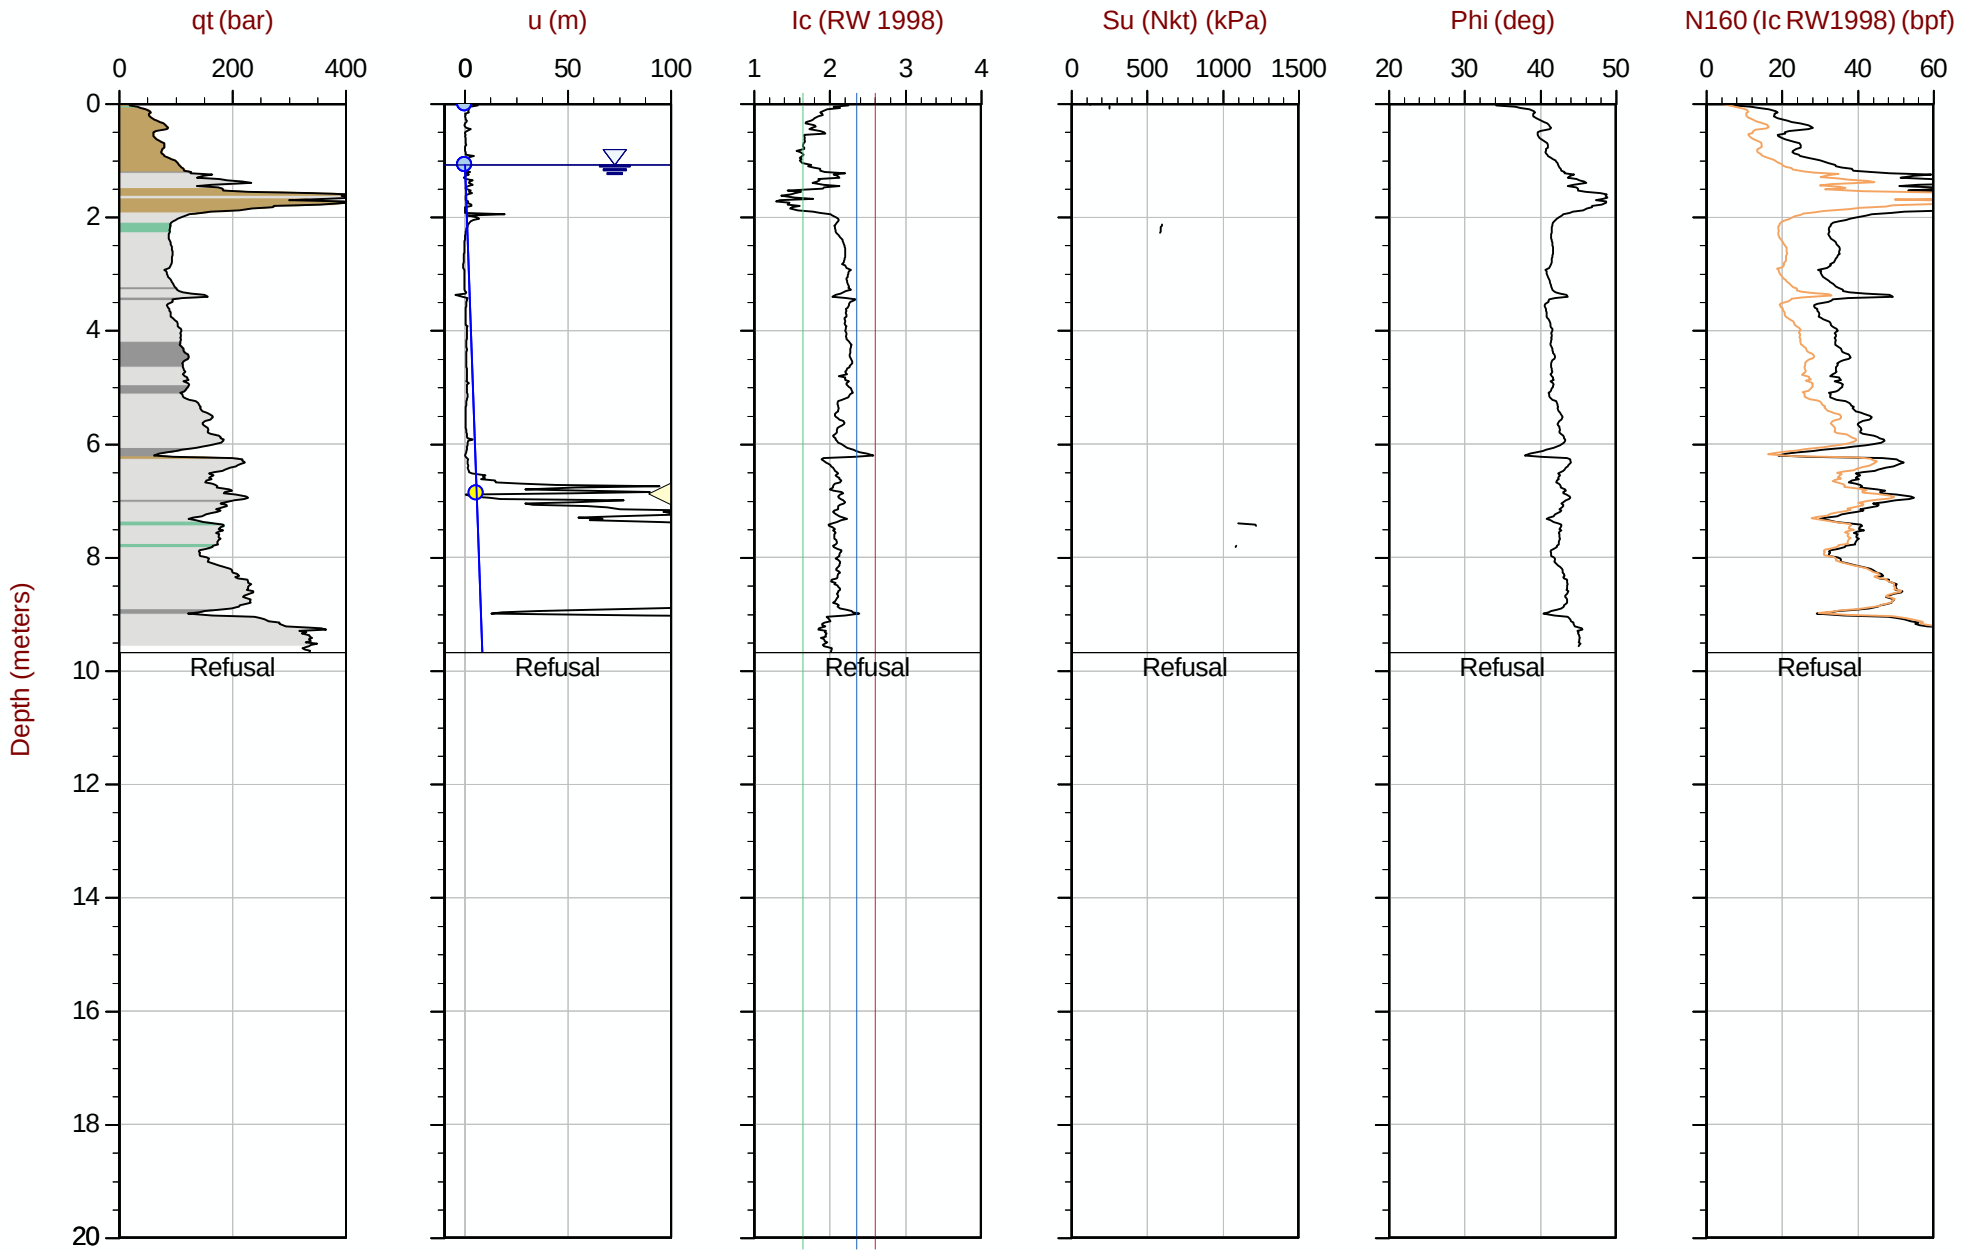

Max Depth: 9.675 m / 31.74 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT331.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609455m E: 415194m Elev: 778.712m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 07:02
Site: Brooks, Alberta

Sounding: RCPT22-22CPT332
Cone: 854:T1500F15U35 Area= 15cm2

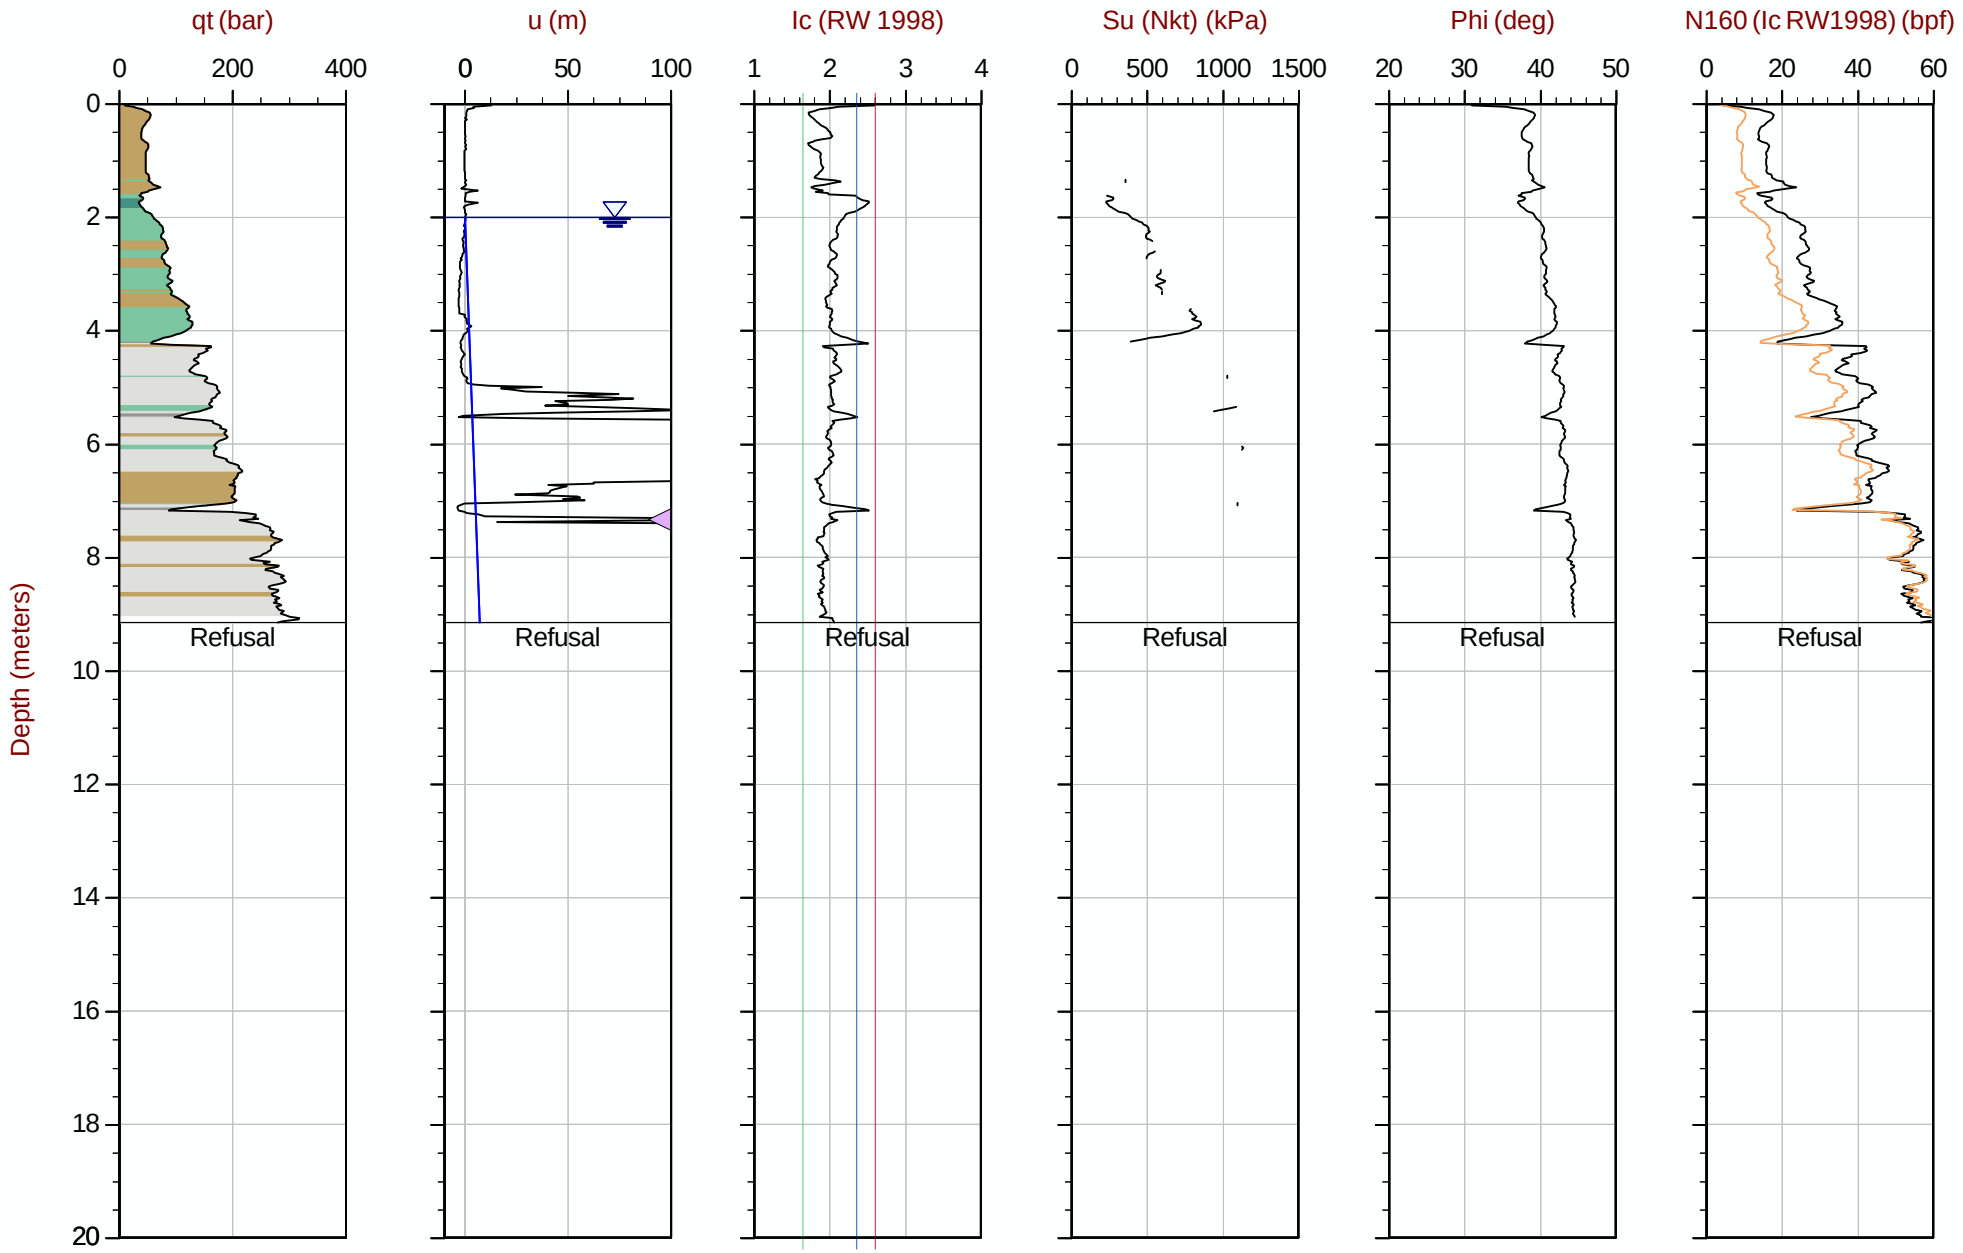

Max Depth: 9.150 m / 30.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT332.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609455m E: 415143m Elev: 777.240m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 08:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT333
Cone: 854:T1500F15U35 Area= 15cm2

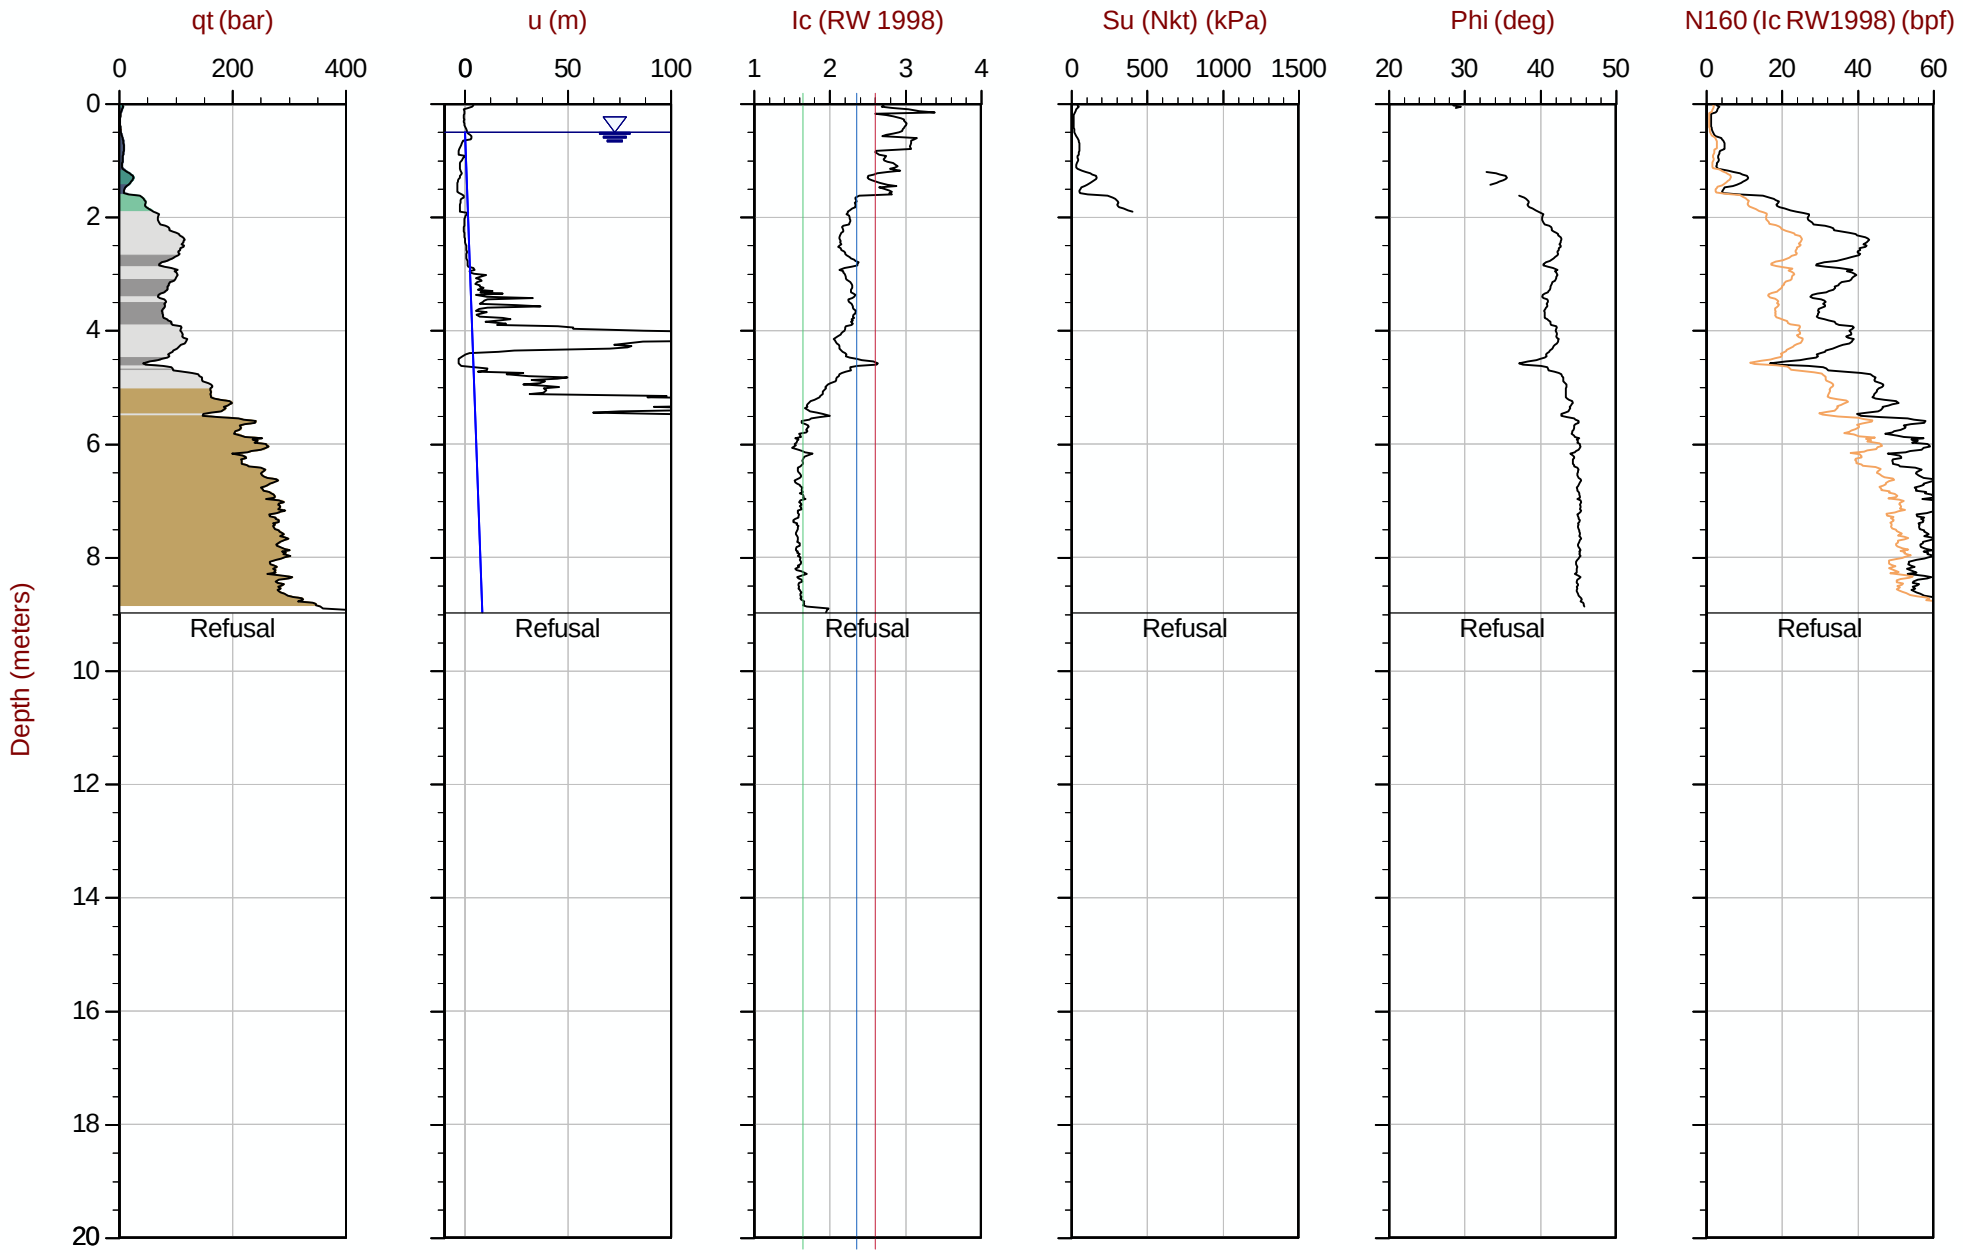

Max Depth: 8.975 m / 29.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT333.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609454m E: 415094m Elev: 775.049m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 10:10
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT334
Cone: 750:T1500F15U35 Area= 15cm2

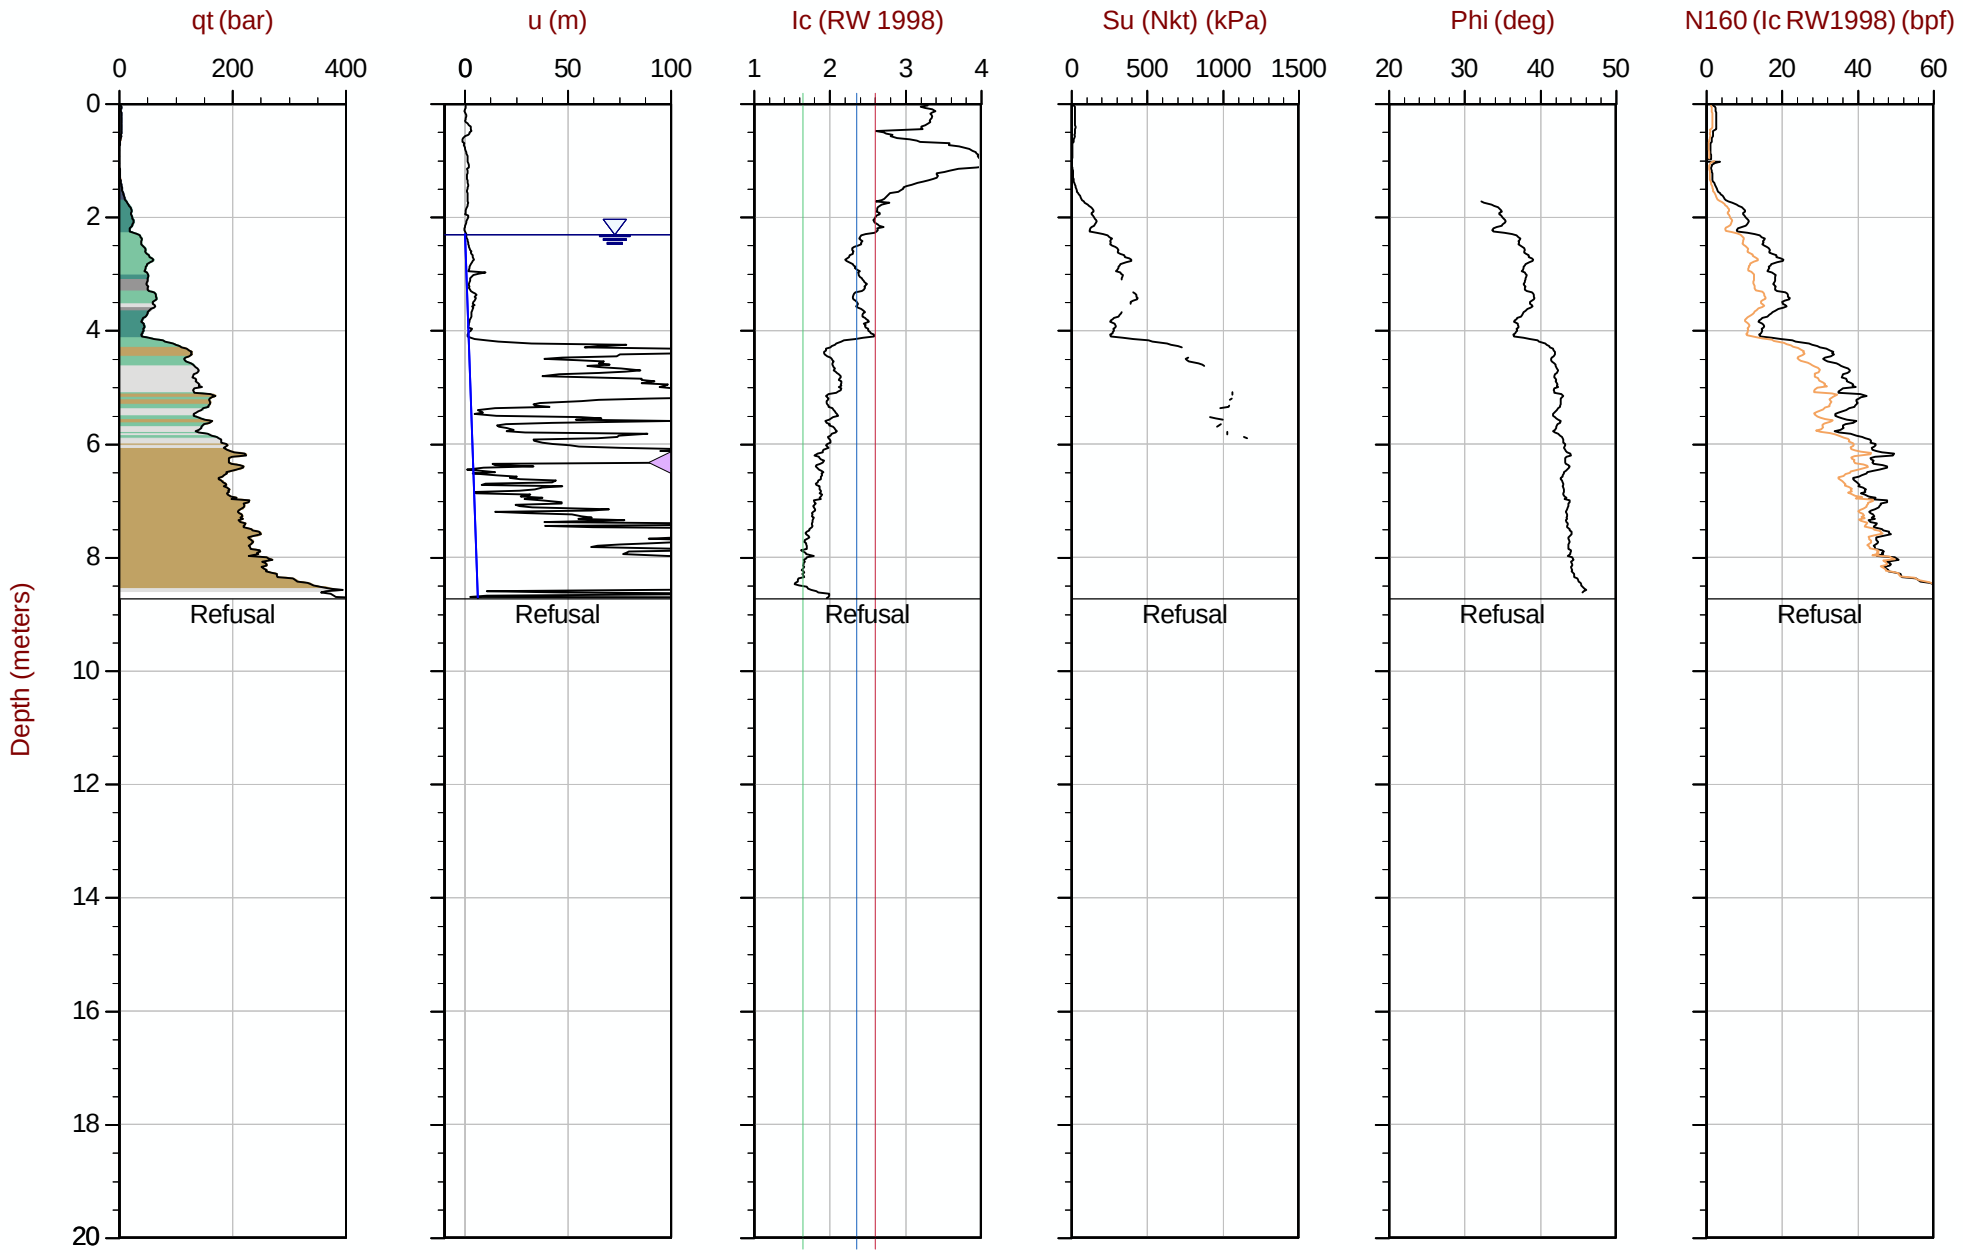

Max Depth: 8.725 m / 28.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT334.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609454m E: 415043m Elev: 774.769m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT335
Cone: 750:T1500F15U35 Area= 15cm2

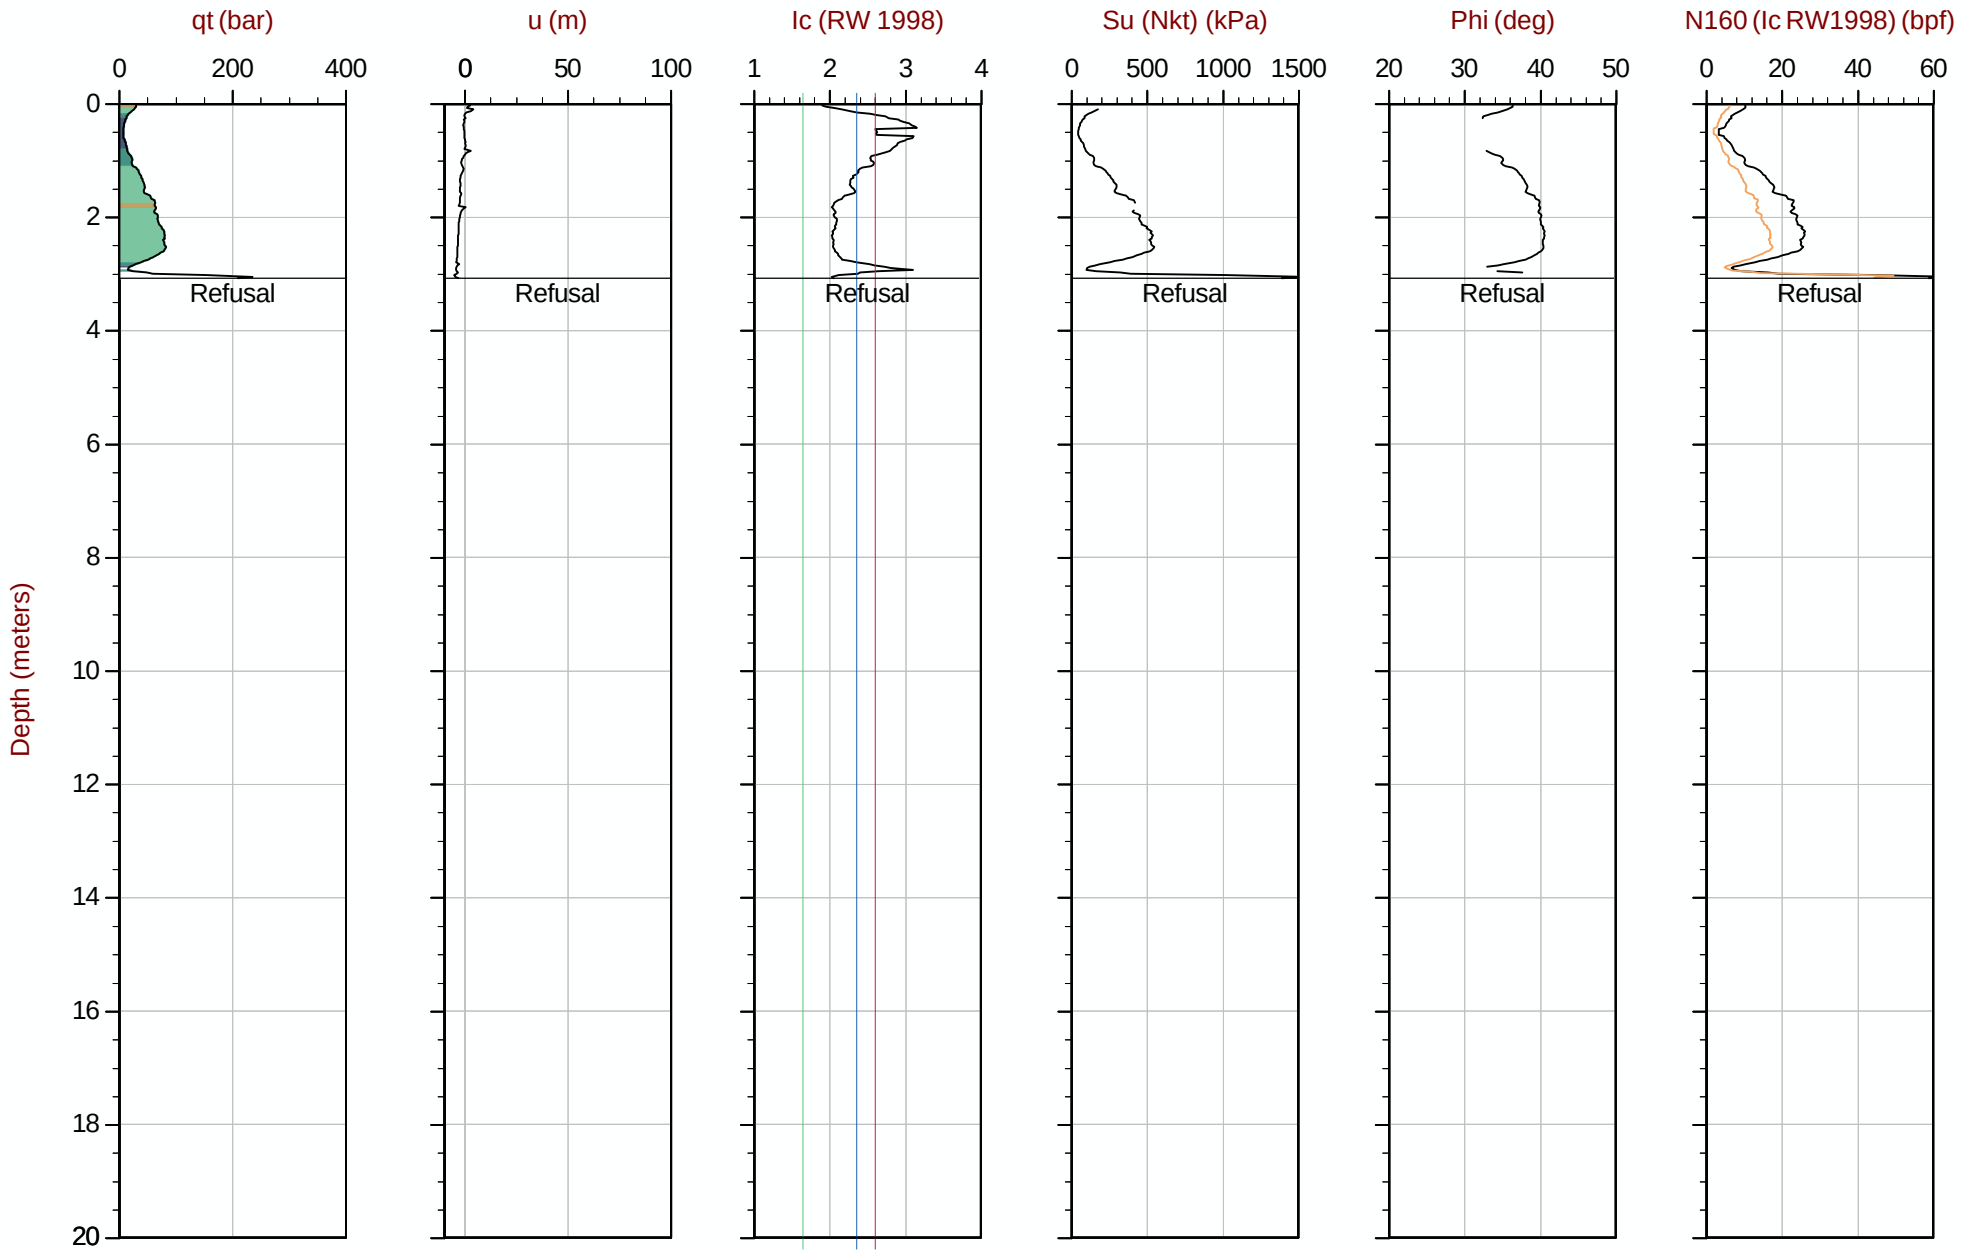

Max Depth: 3.075 m / 10.09 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT335.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 414993m Elev: 776.343m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 13:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT335B
Cone: 821:T1000F10U35 Area= 15cm2

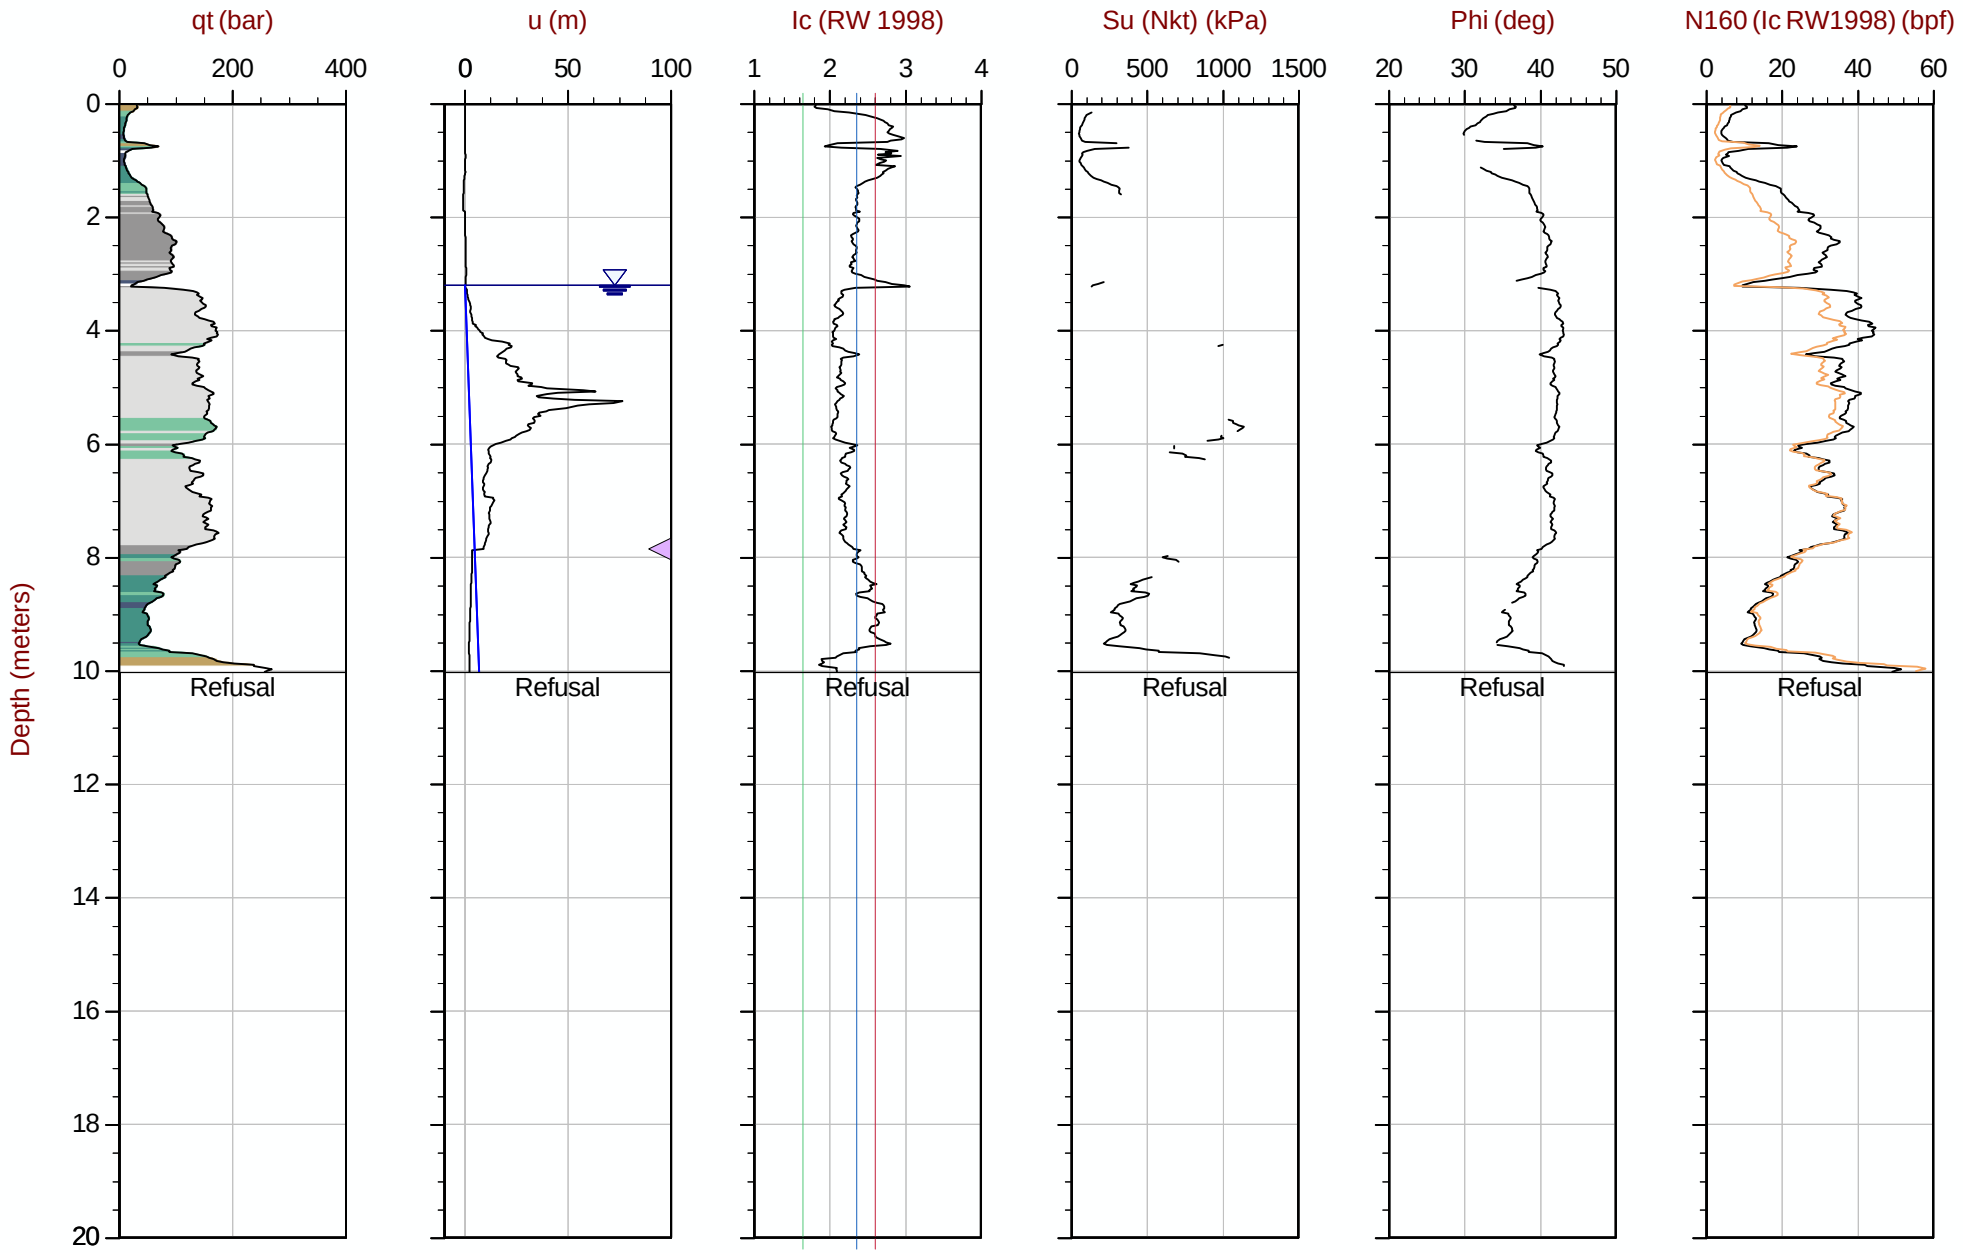

Max Depth: 10.025 m / 32.89 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT335B.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 414990m Elev: 776.300m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 14:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT336
Cone: 821:T1000F10U35 Area= 15cm2

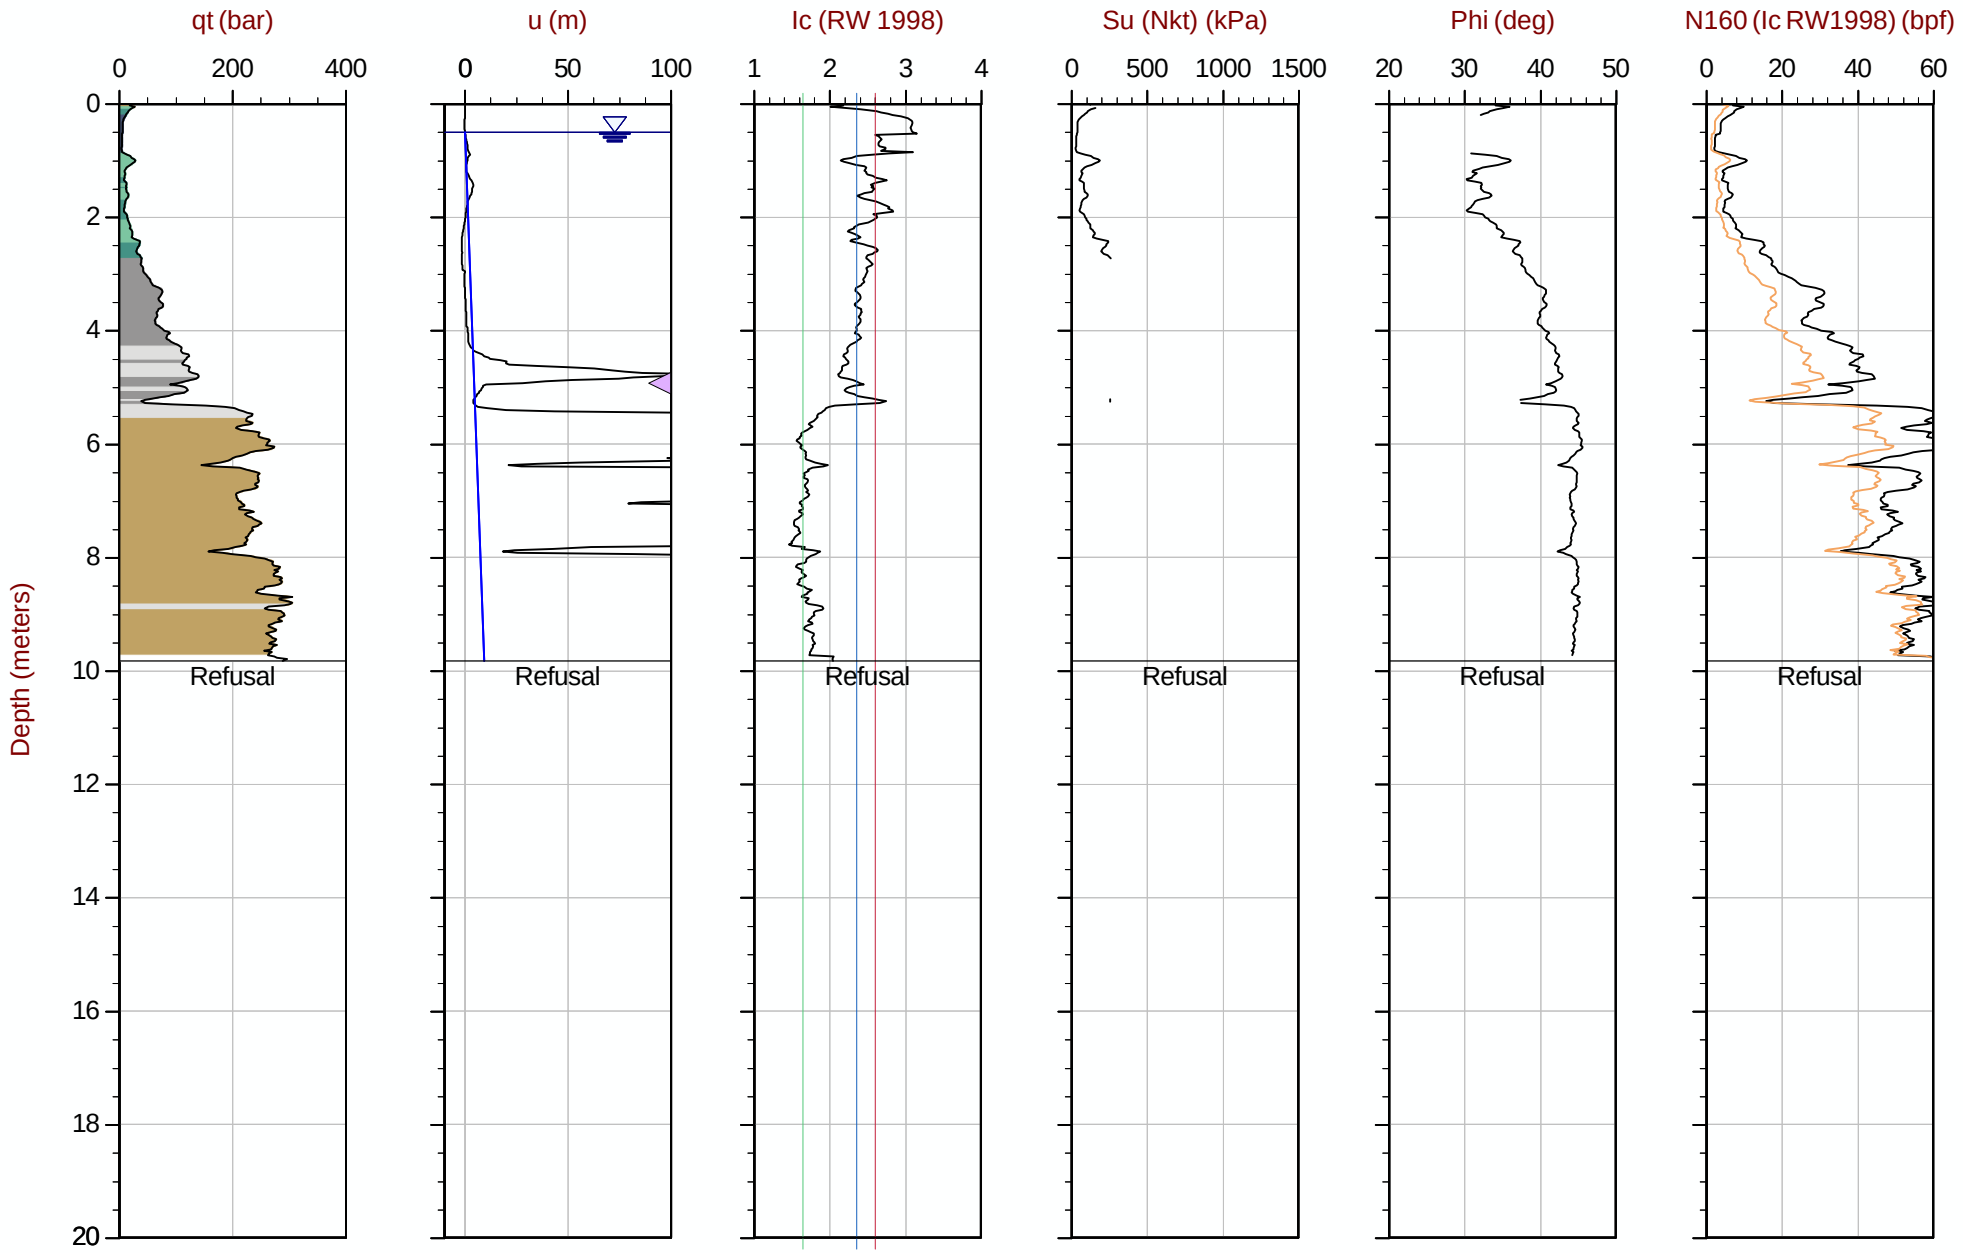

Max Depth: 9.825 m / 32.23 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT336.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609453m E: 414943m Elev: 776.131m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 16:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT337
Cone: 821:T1000F10U35 Area= 15cm2

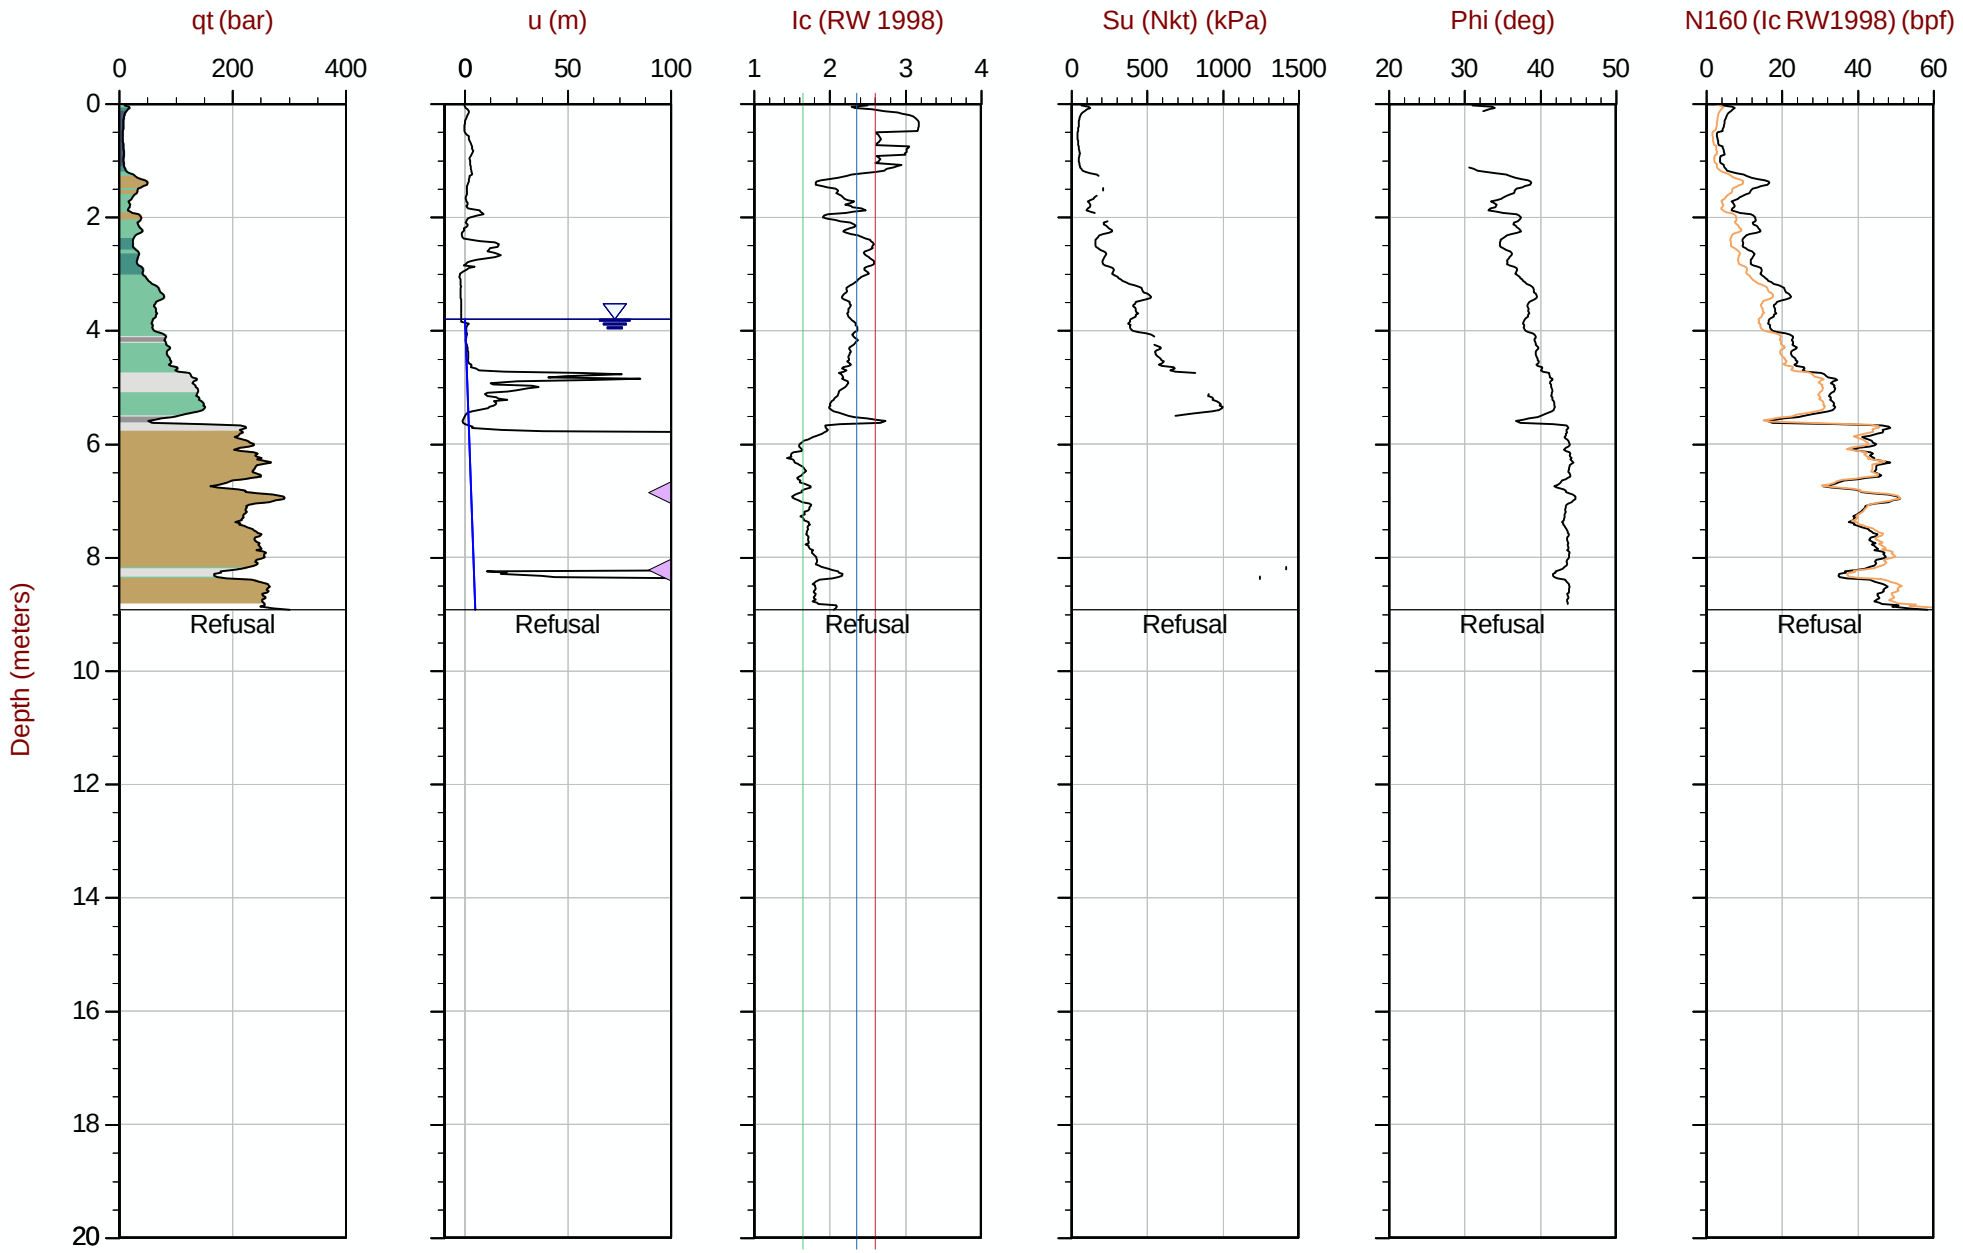

Max Depth: 8.925 m / 29.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT337.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609452m E: 414893m Elev: 776.165m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 07:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT338
Cone: 821:T1000F10U35 Area= 15cm2

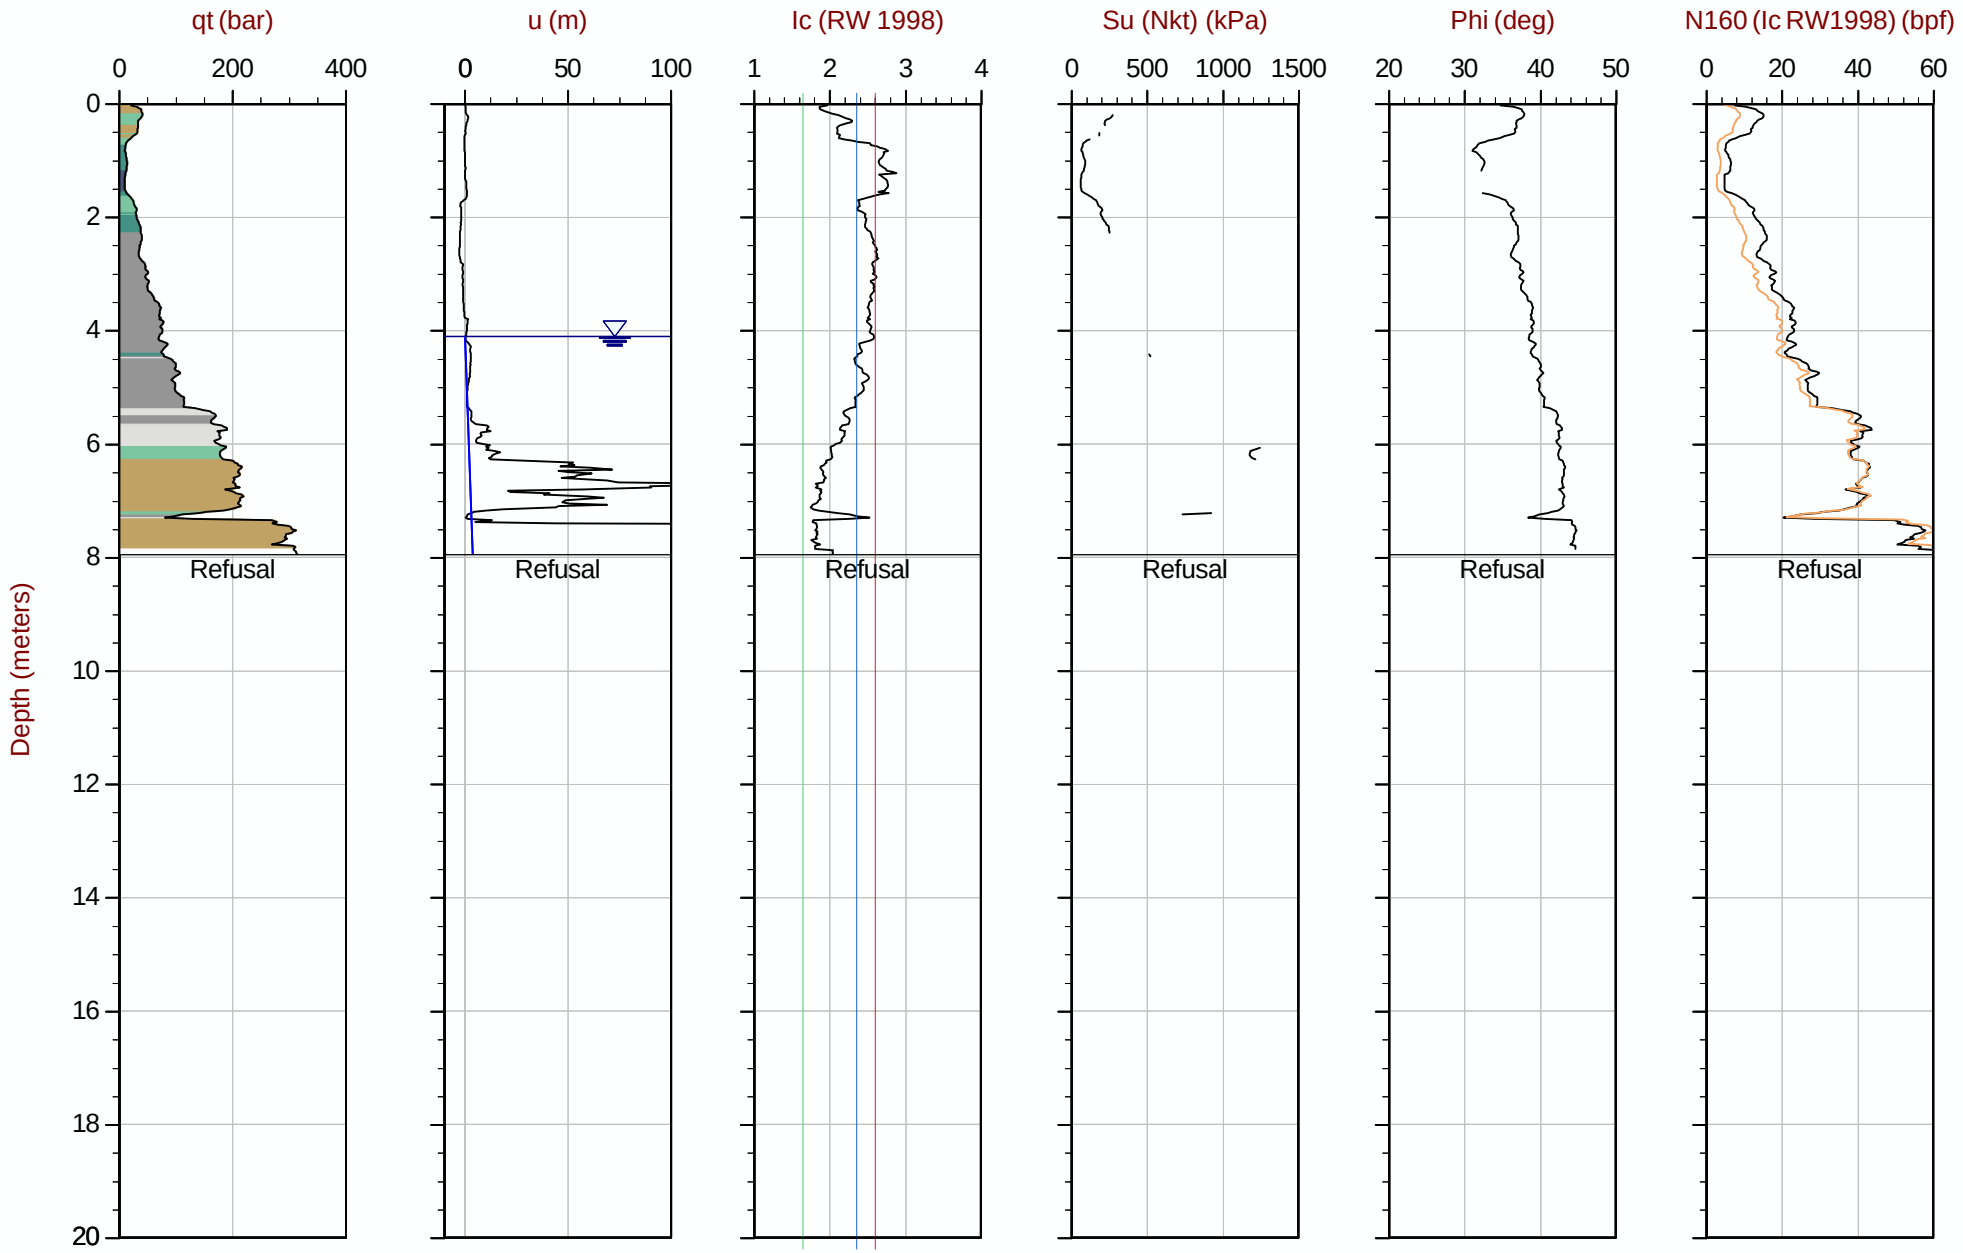

Max Depth: 7.950 m / 26.08 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT338.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609452m E: 414843m Elev: 777.325m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 08:45
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT339
Cone: 821:T1000F10U35 Area= 15cm2

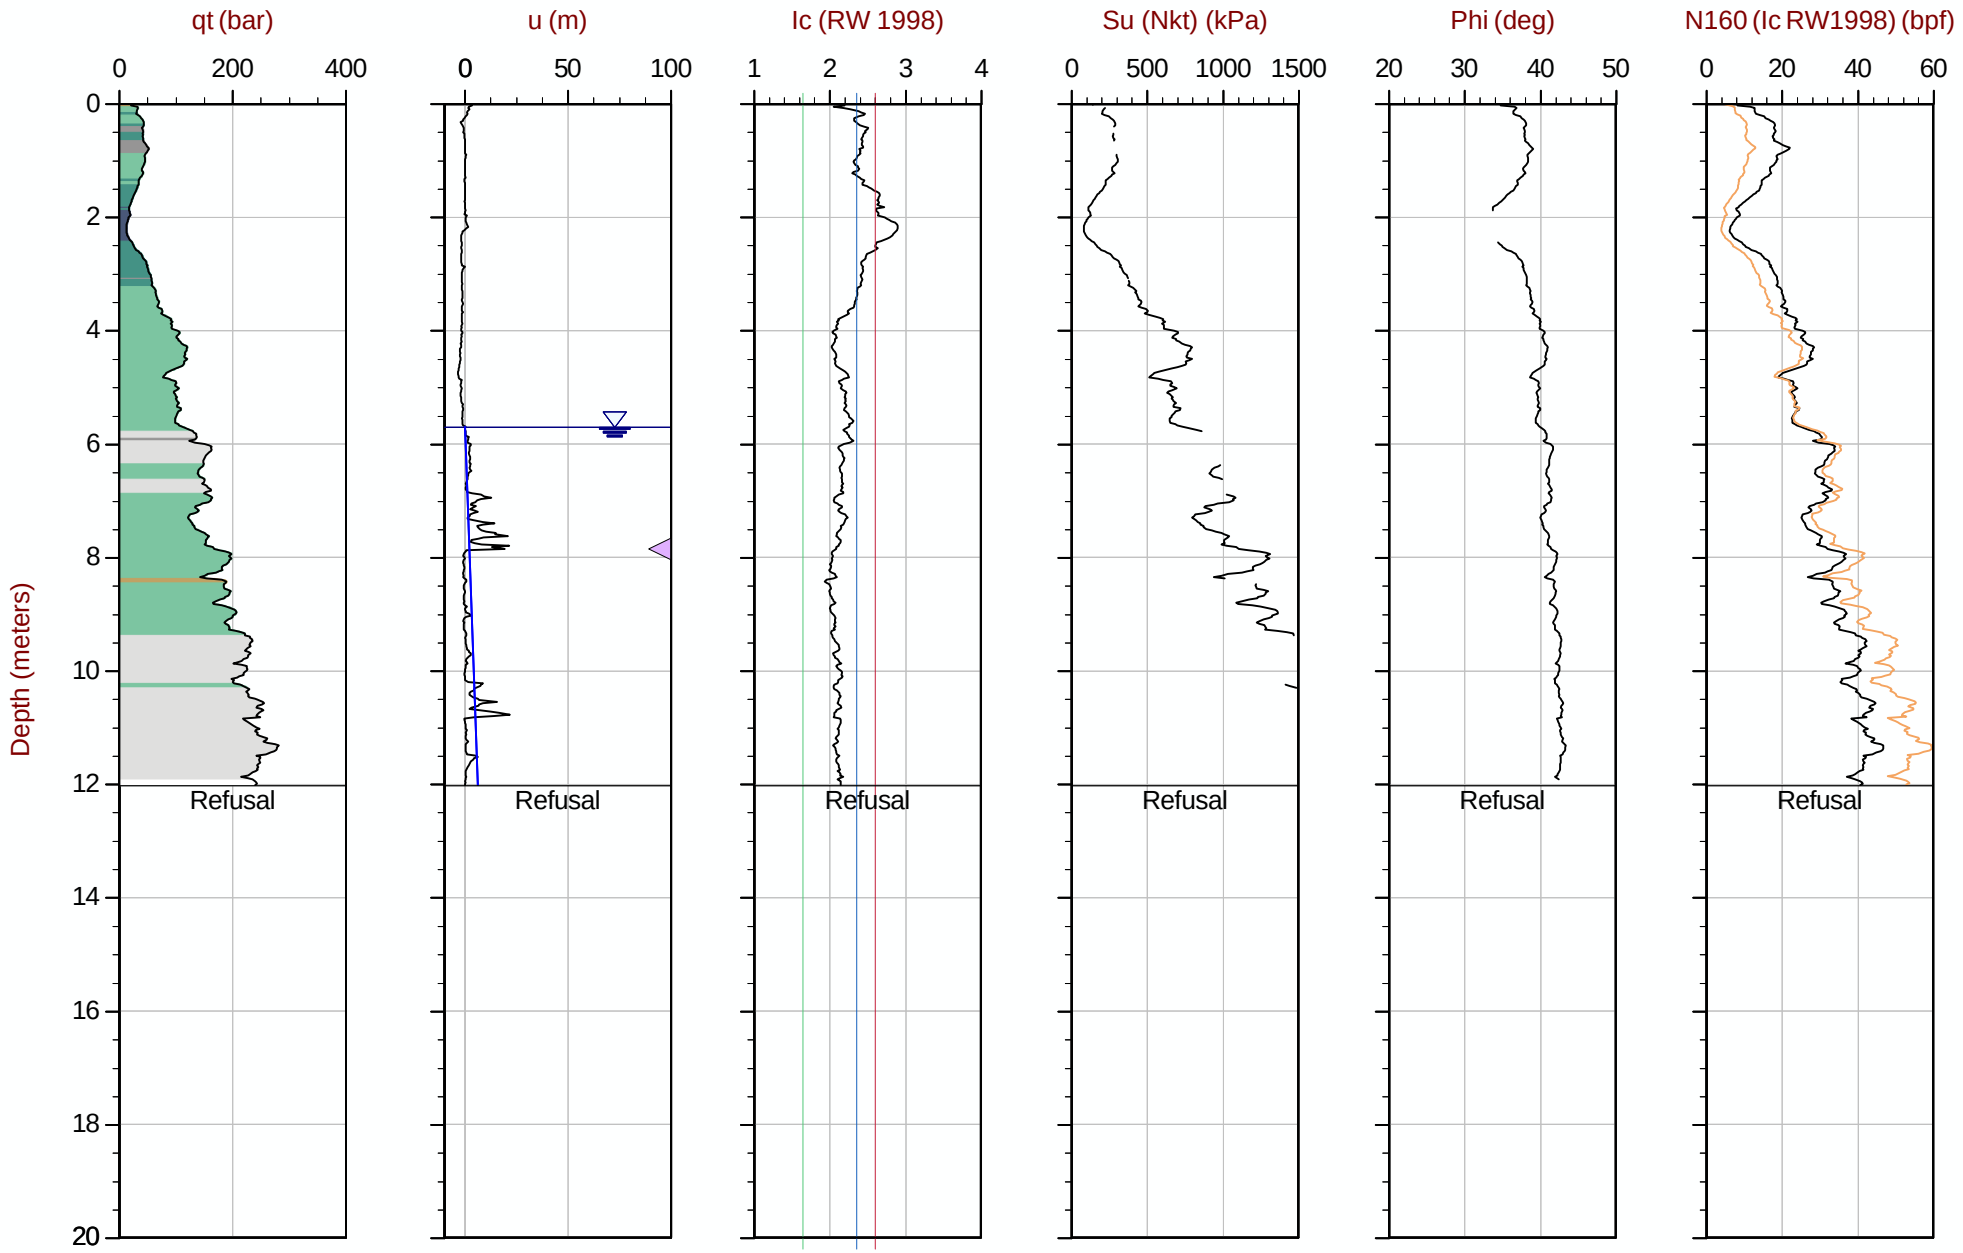

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT339.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609451m E: 414743m Elev: 782.132m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 06:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT340
Cone: 854:T1500F15U35 Area= 15cm2

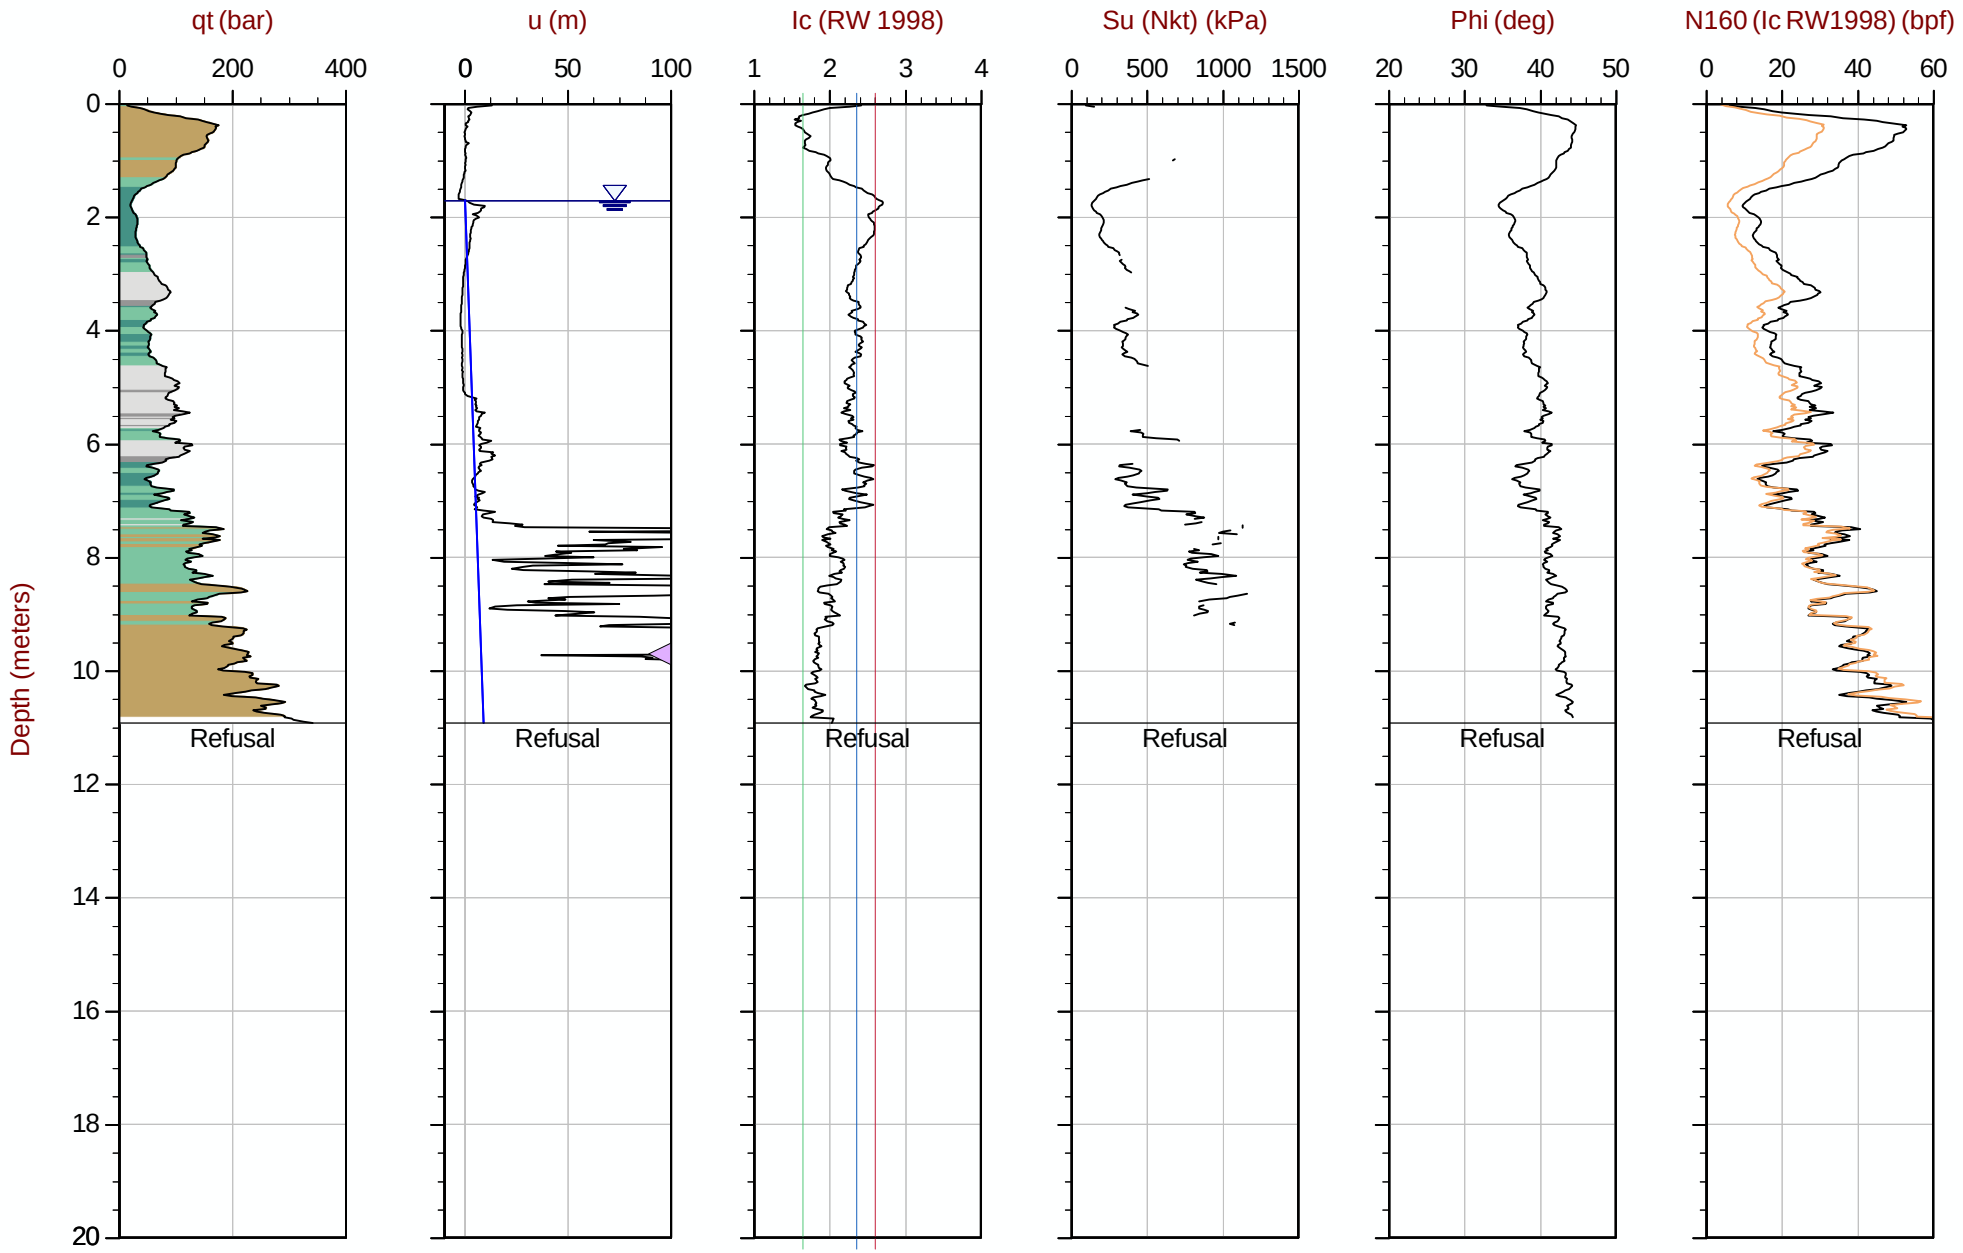

Max Depth: 10.925 m / 35.84 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT340.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609553m E: 416816m Elev: 767.994m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 09:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT341
Cone: 854:T1500F15U35 Area= 15cm2

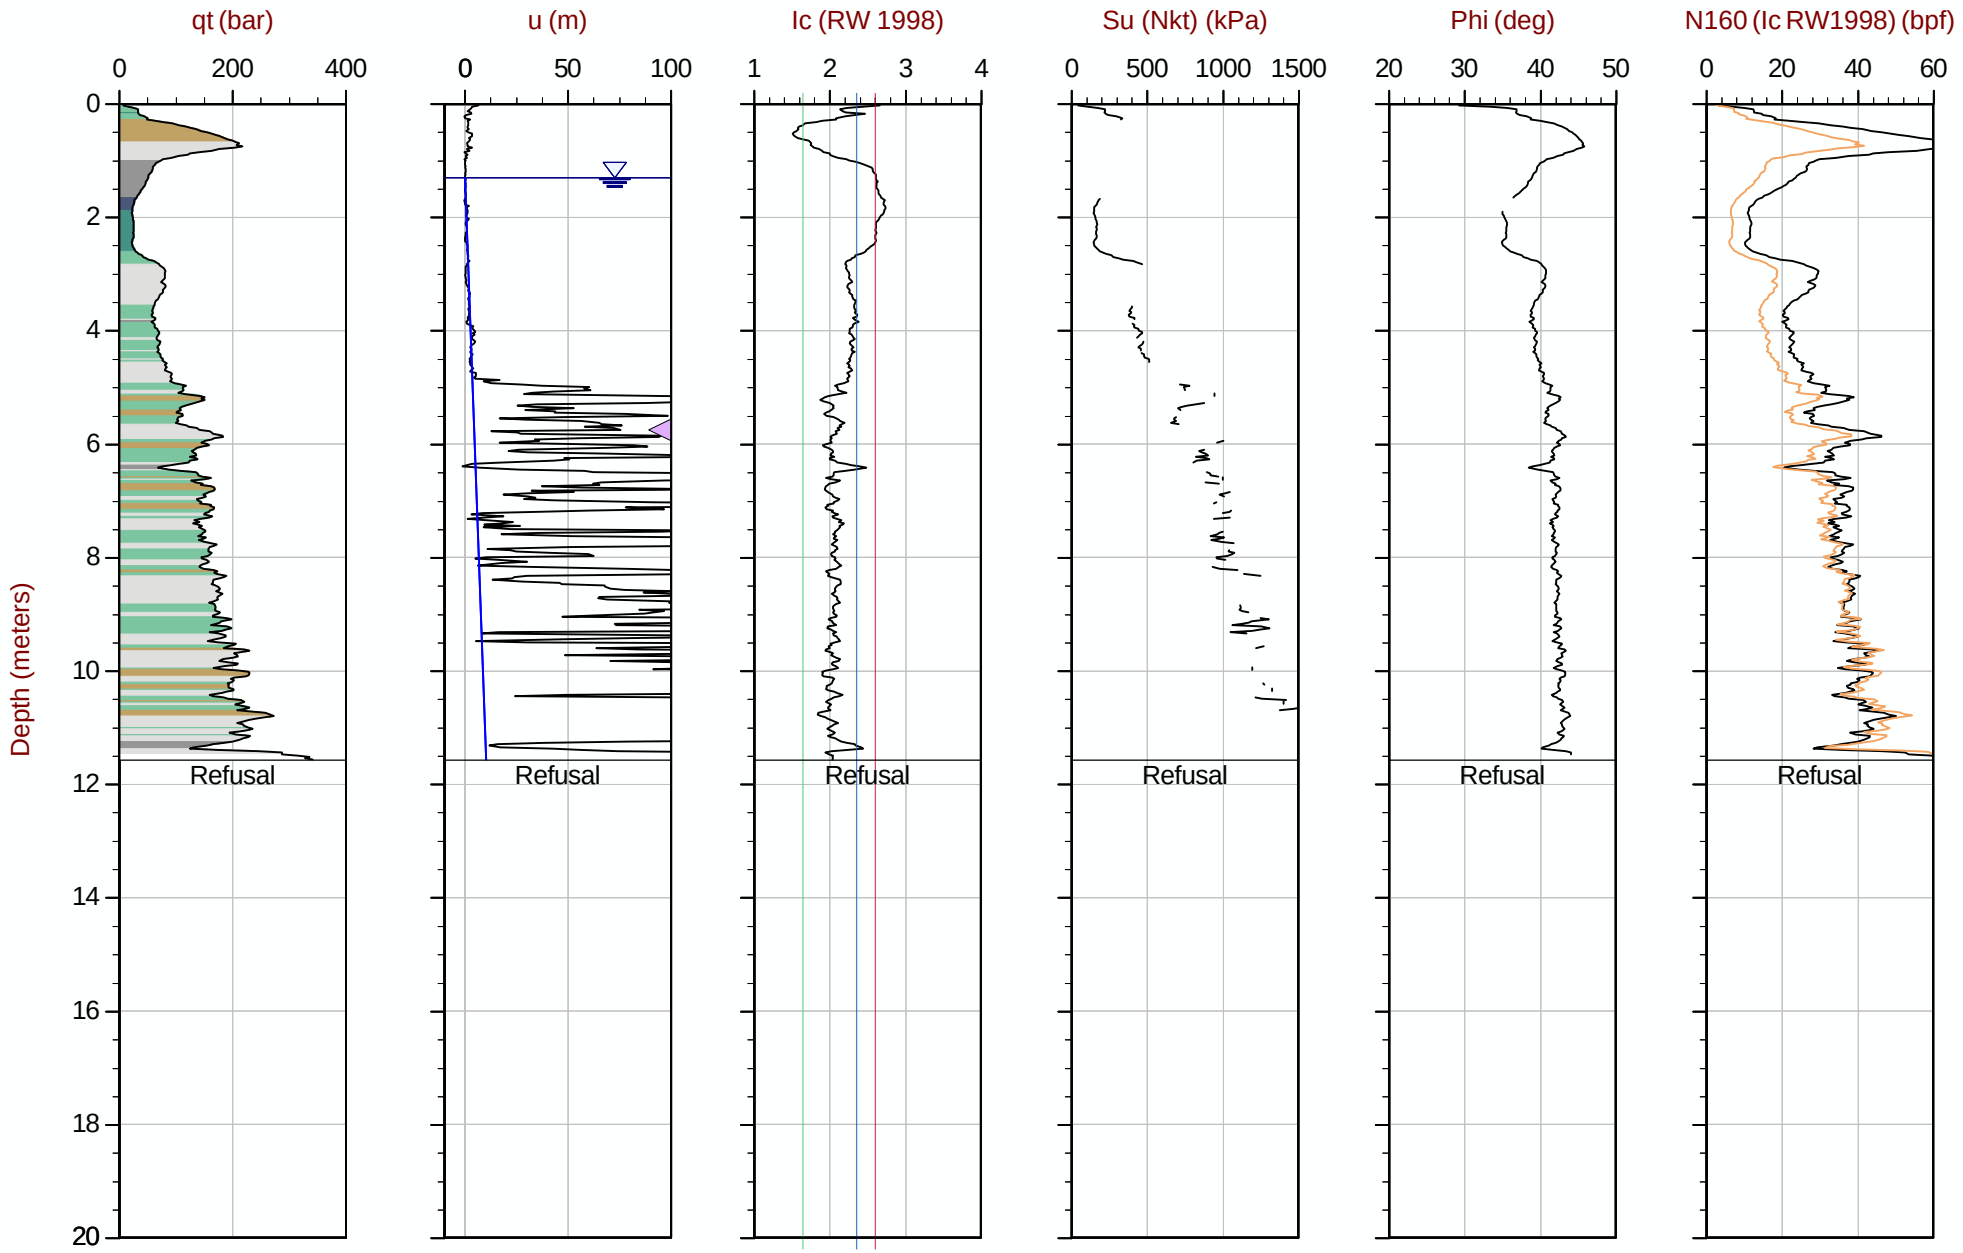

Max Depth: 11.575 m / 37.98 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT341.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609478m E: 416727m Elev: 768.082m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 15:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT343
Cone: 854:T1500F15U35 Area= 15cm2

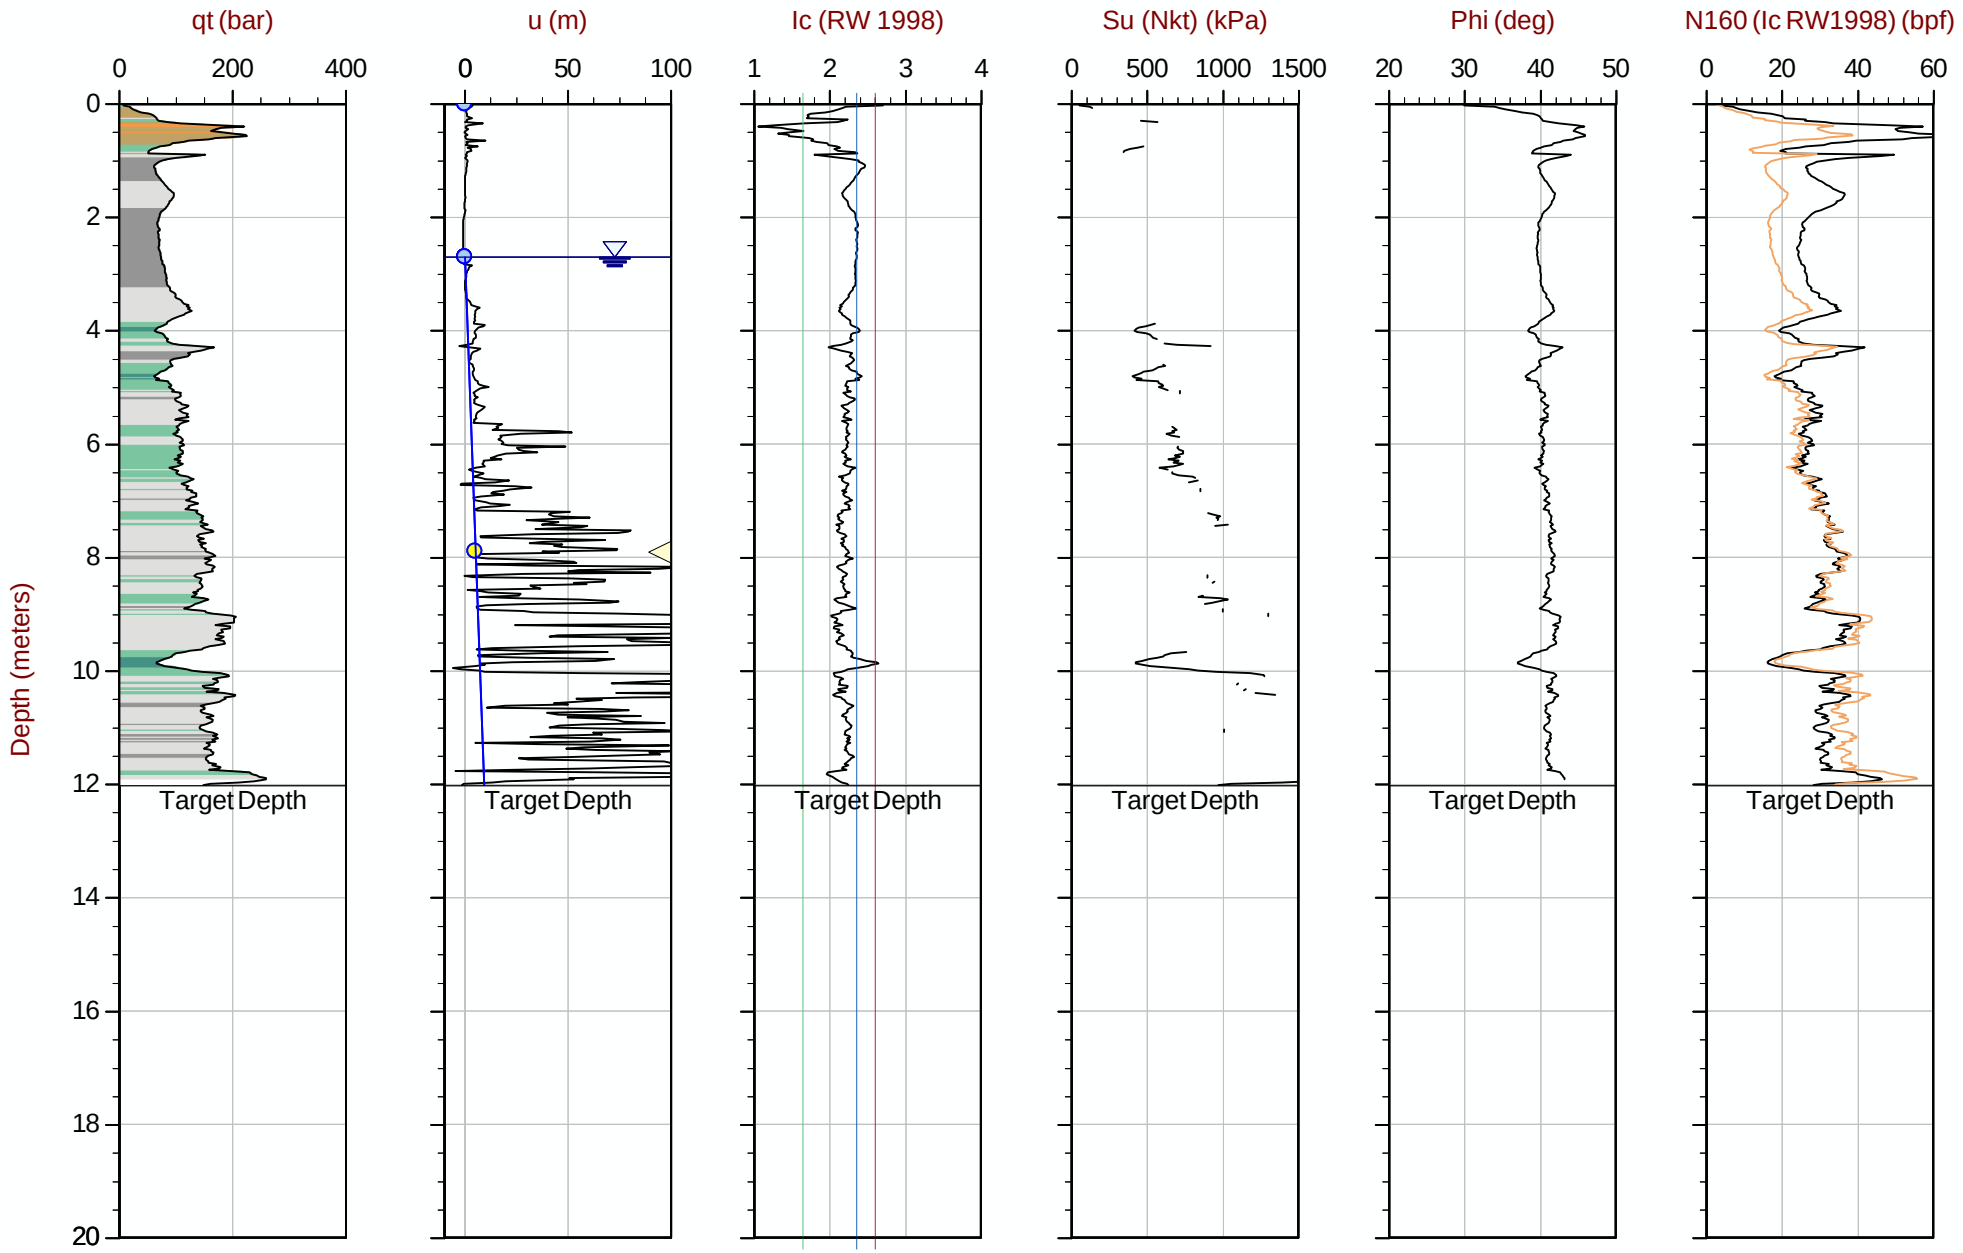

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT343.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609430m E: 416510m Elev: 770.018m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 08:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT344
Cone: 854:T1500F15U35 Area= 15cm2

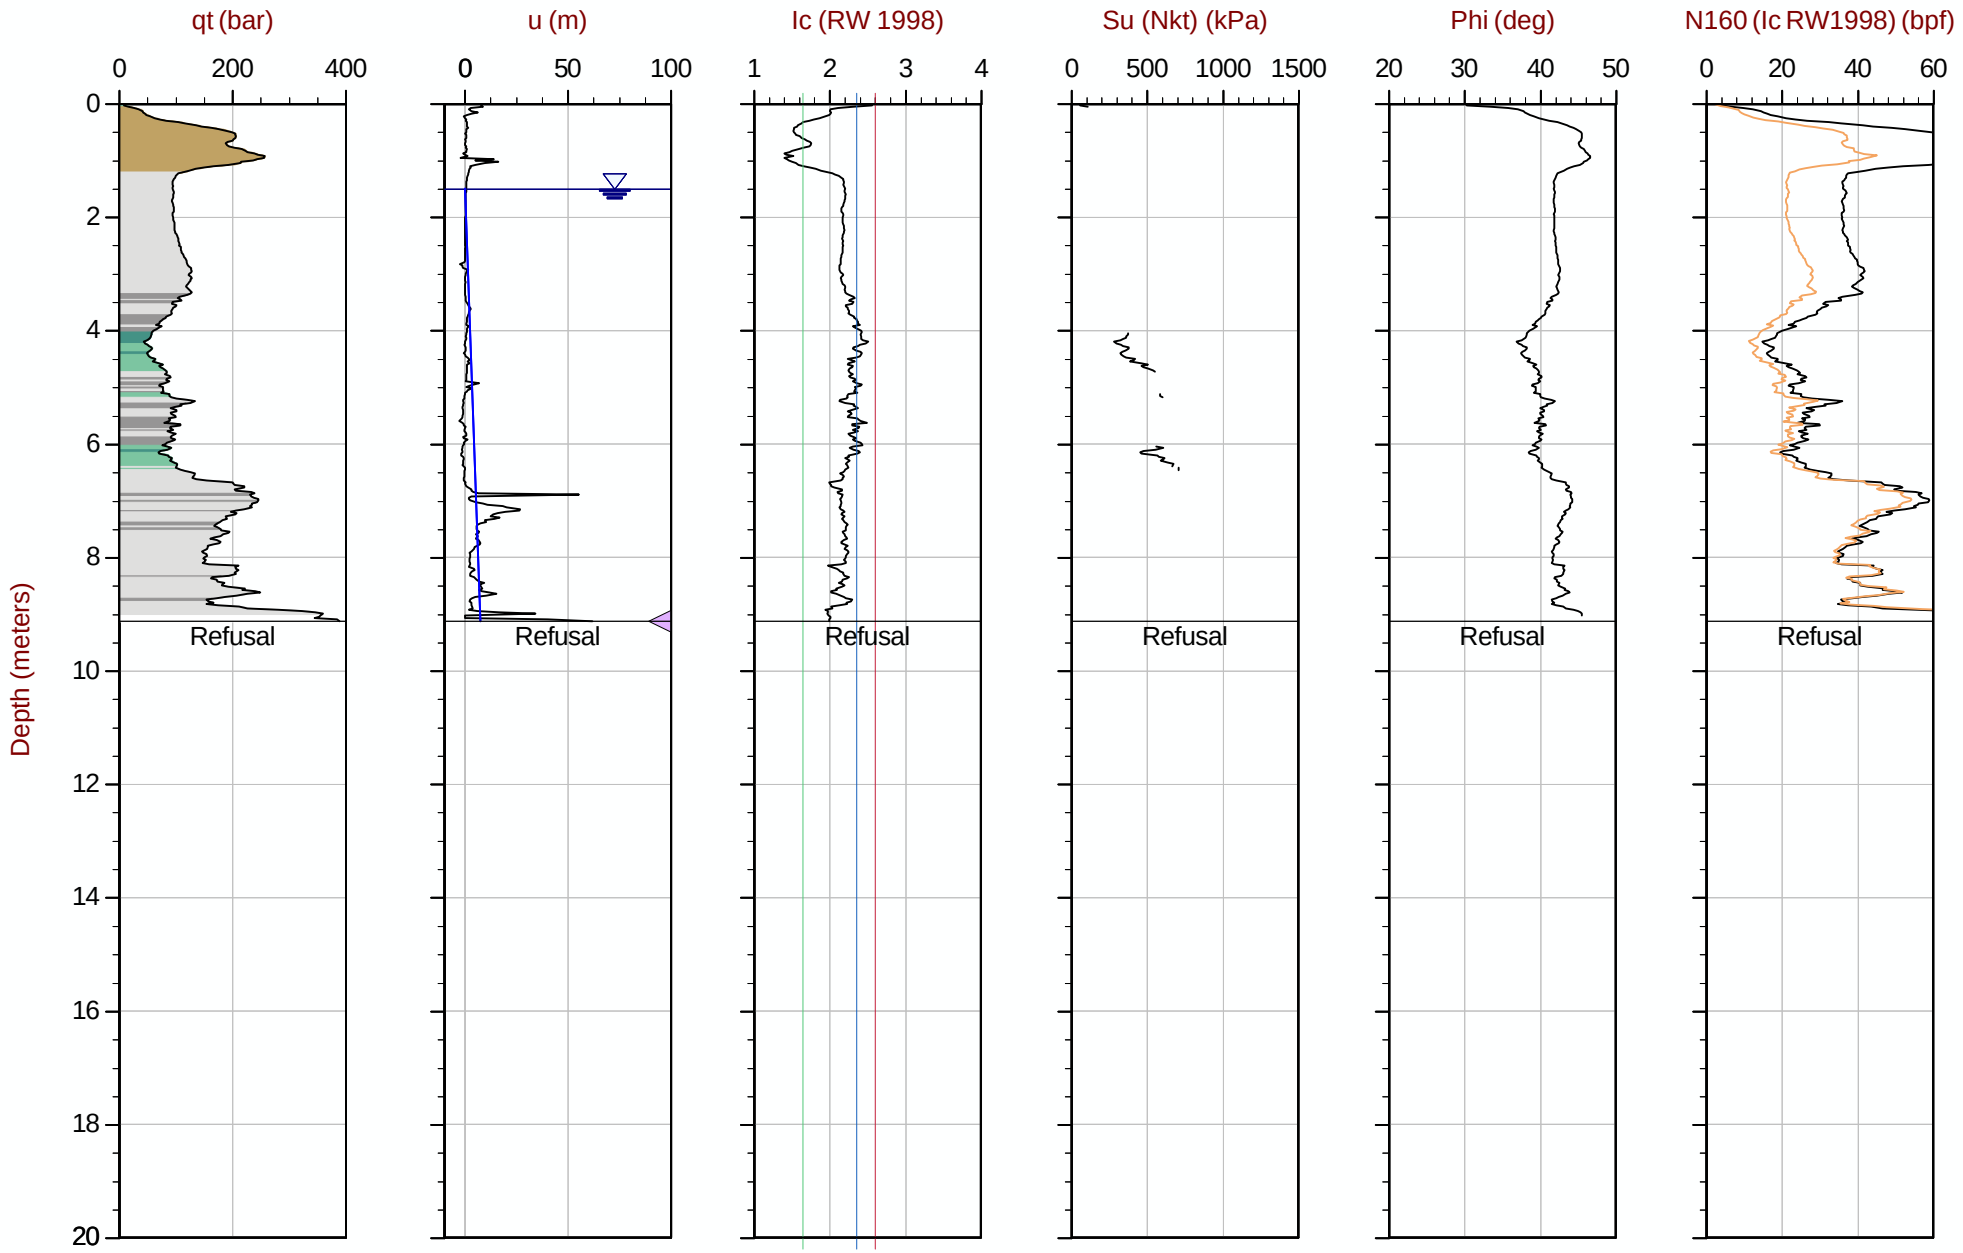

Max Depth: 9.125 m / 29.94 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT344.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609431m E: 416410m Elev: 770.338m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 11:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT345
Cone: 854:T1500F15U35 Area= 15cm2

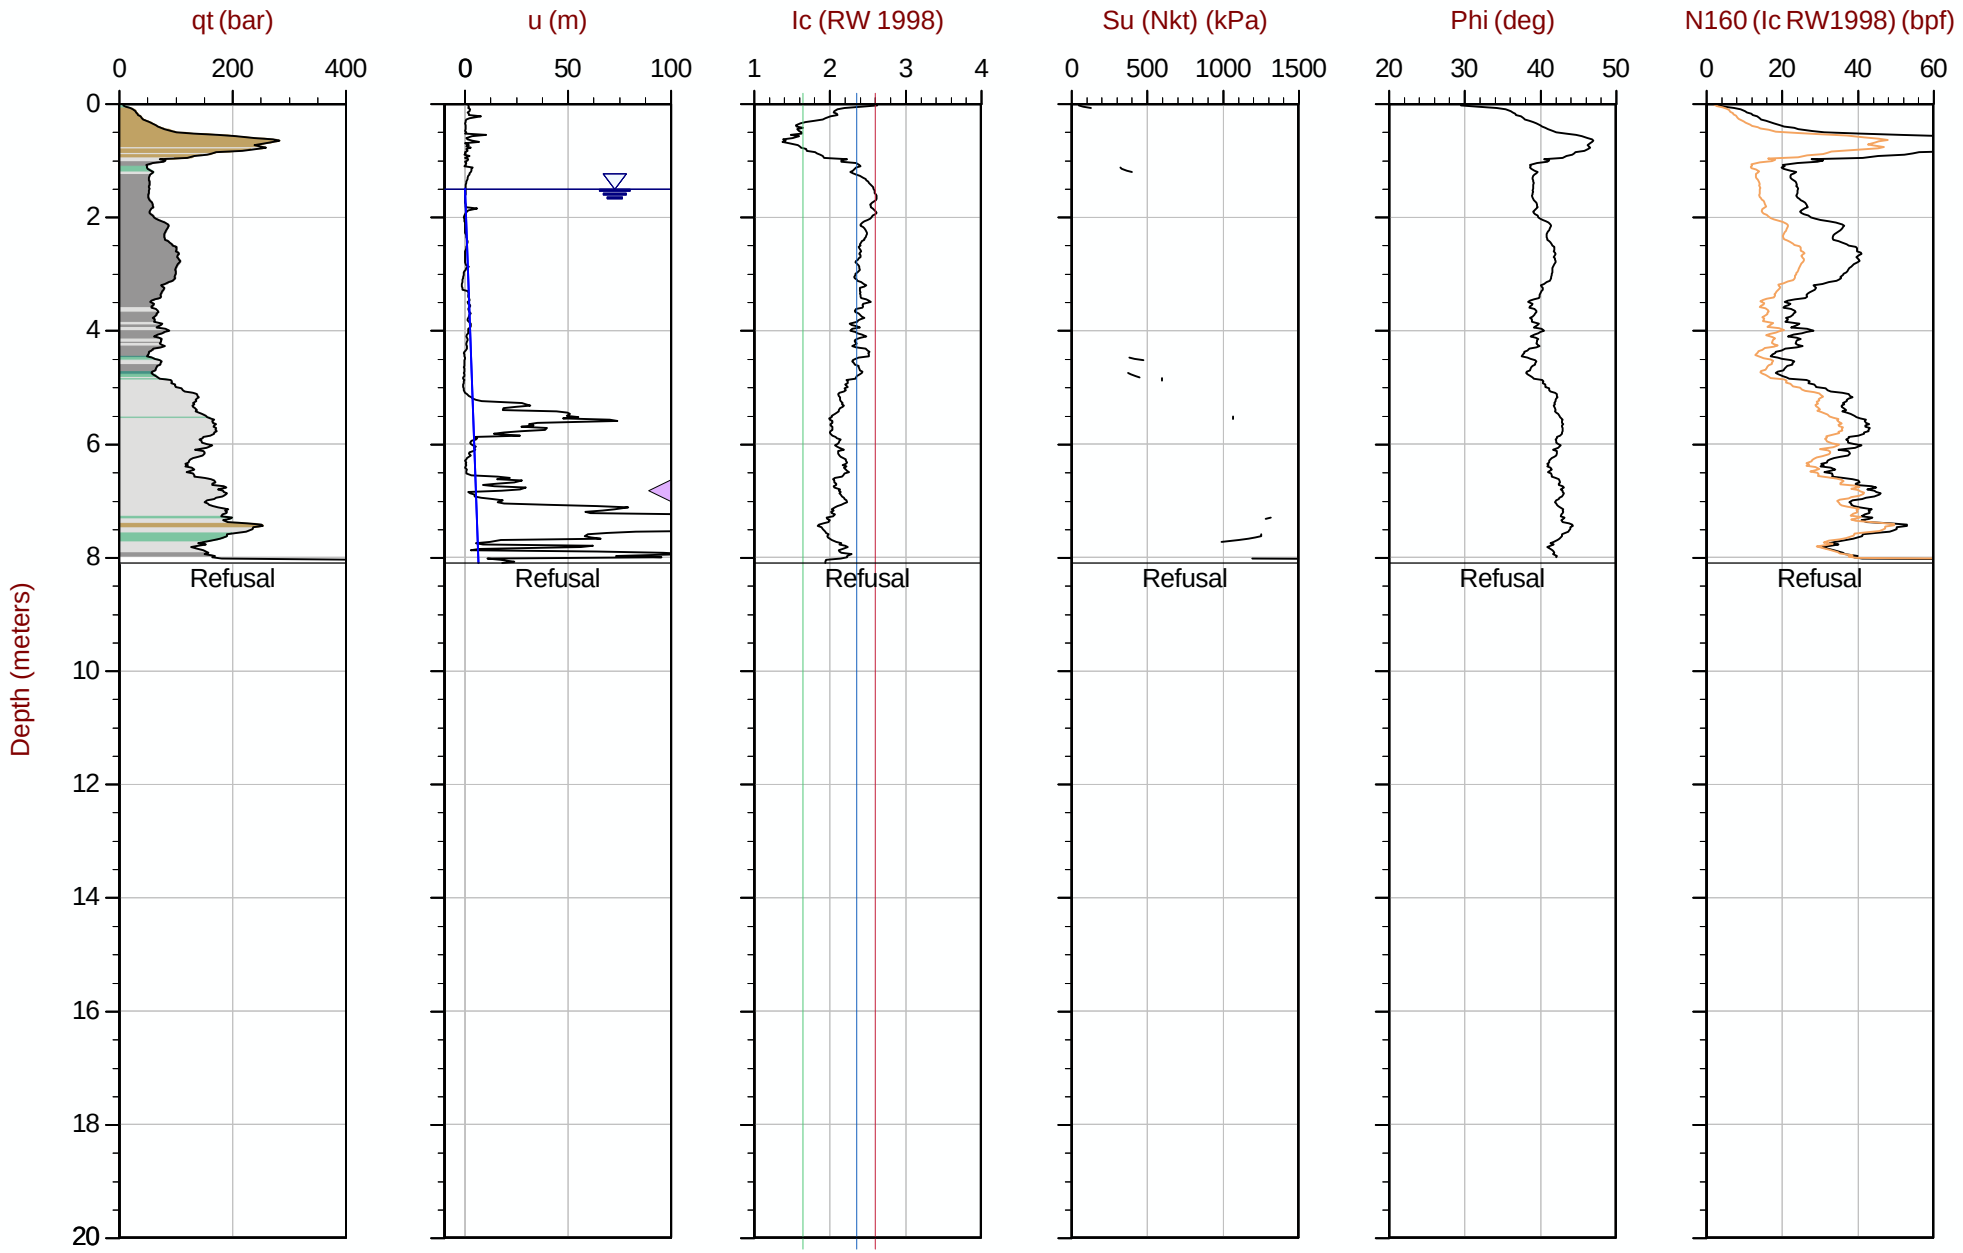

Max Depth: 8.100 m / 26.57 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT345.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609433m E: 416311m Elev: 770.990m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 14:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT346
Cone: 854:T1500F15U35 Area= 15cm2

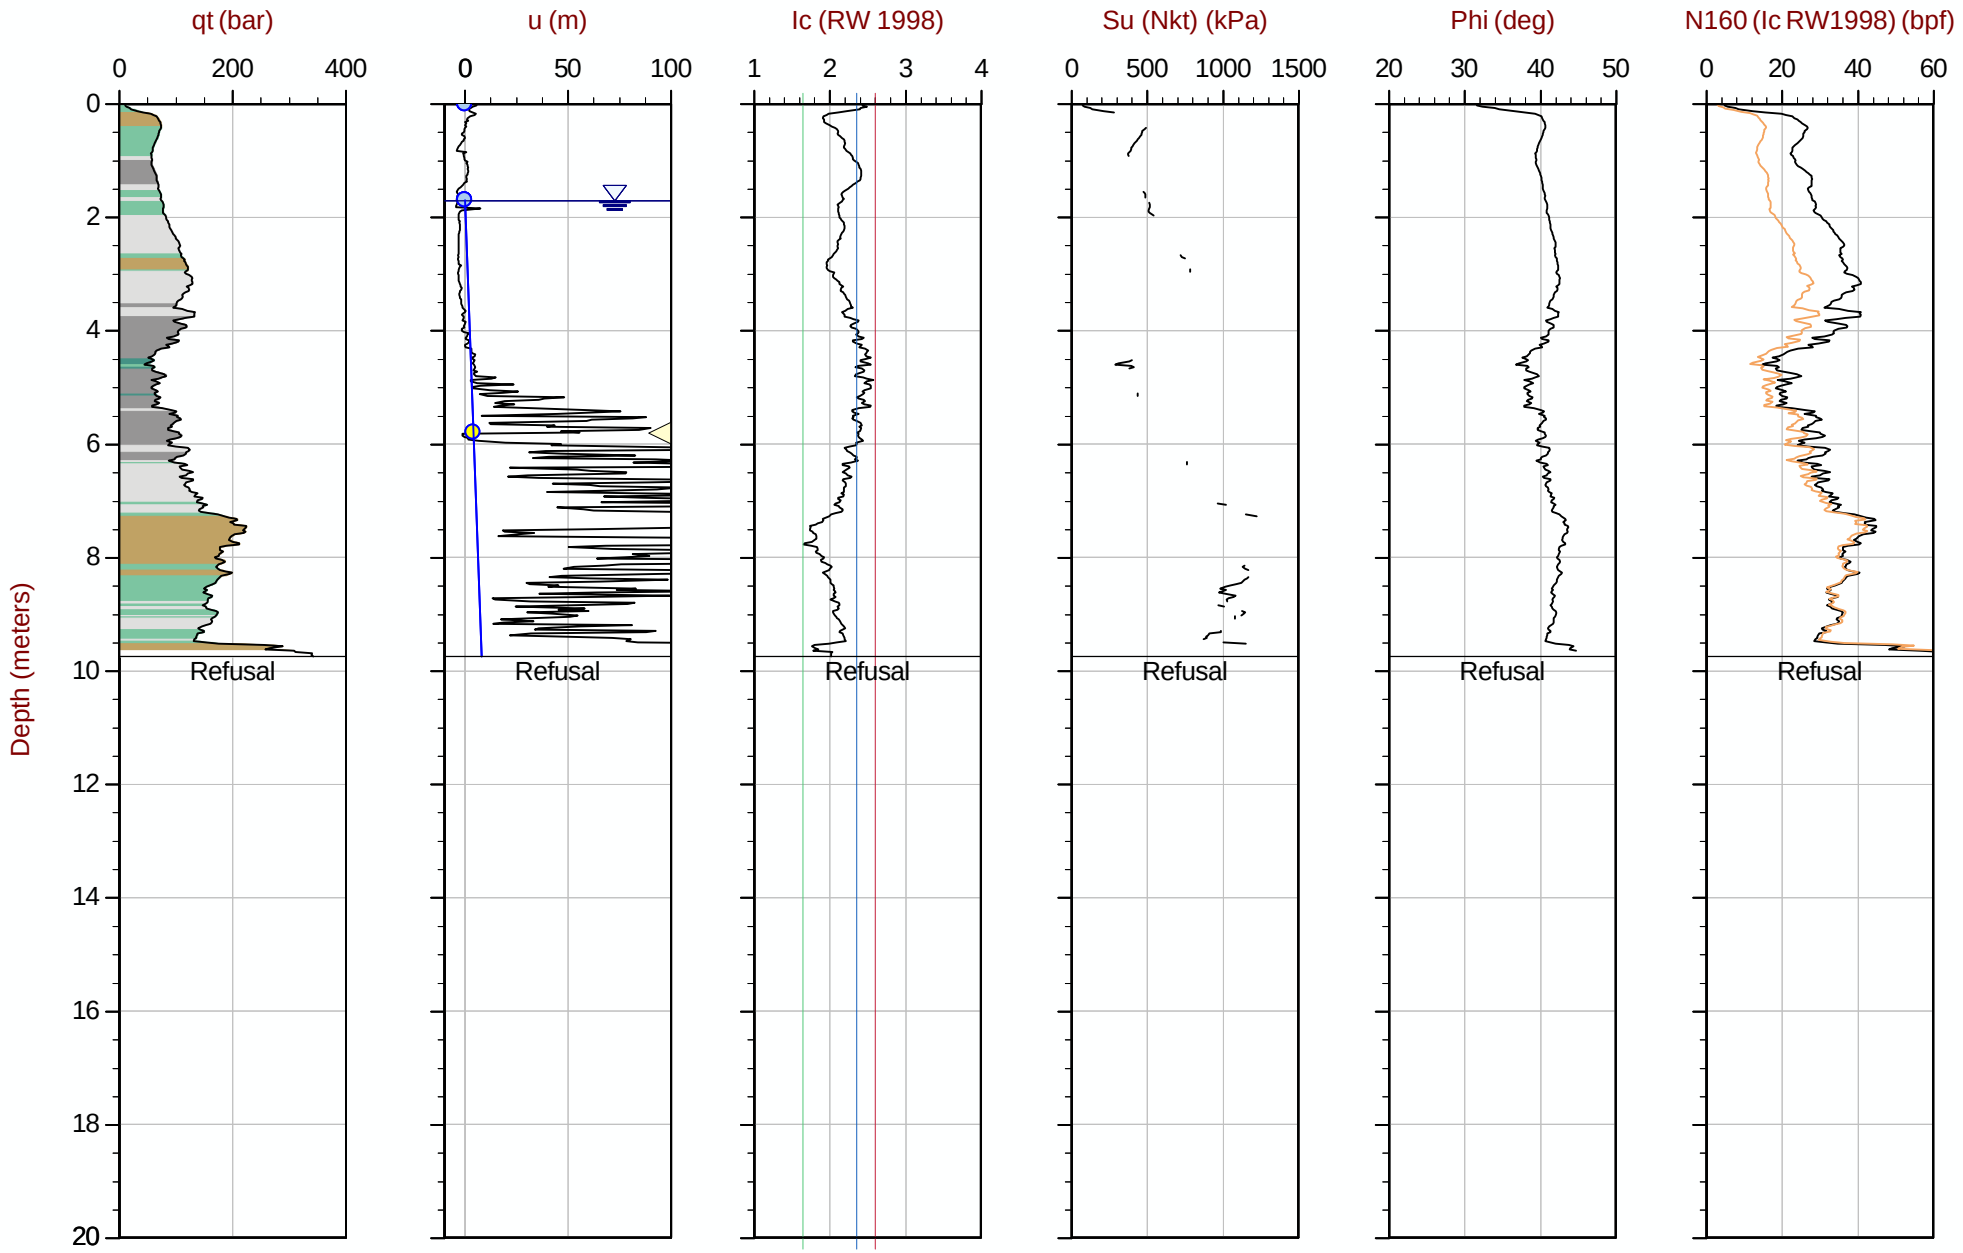

Max Depth: 9.750 m / 31.99 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT346.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609434m E: 416210m Elev: 771.330m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 07:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT347
Cone: 854:T1500F15U35 Area= 15cm2

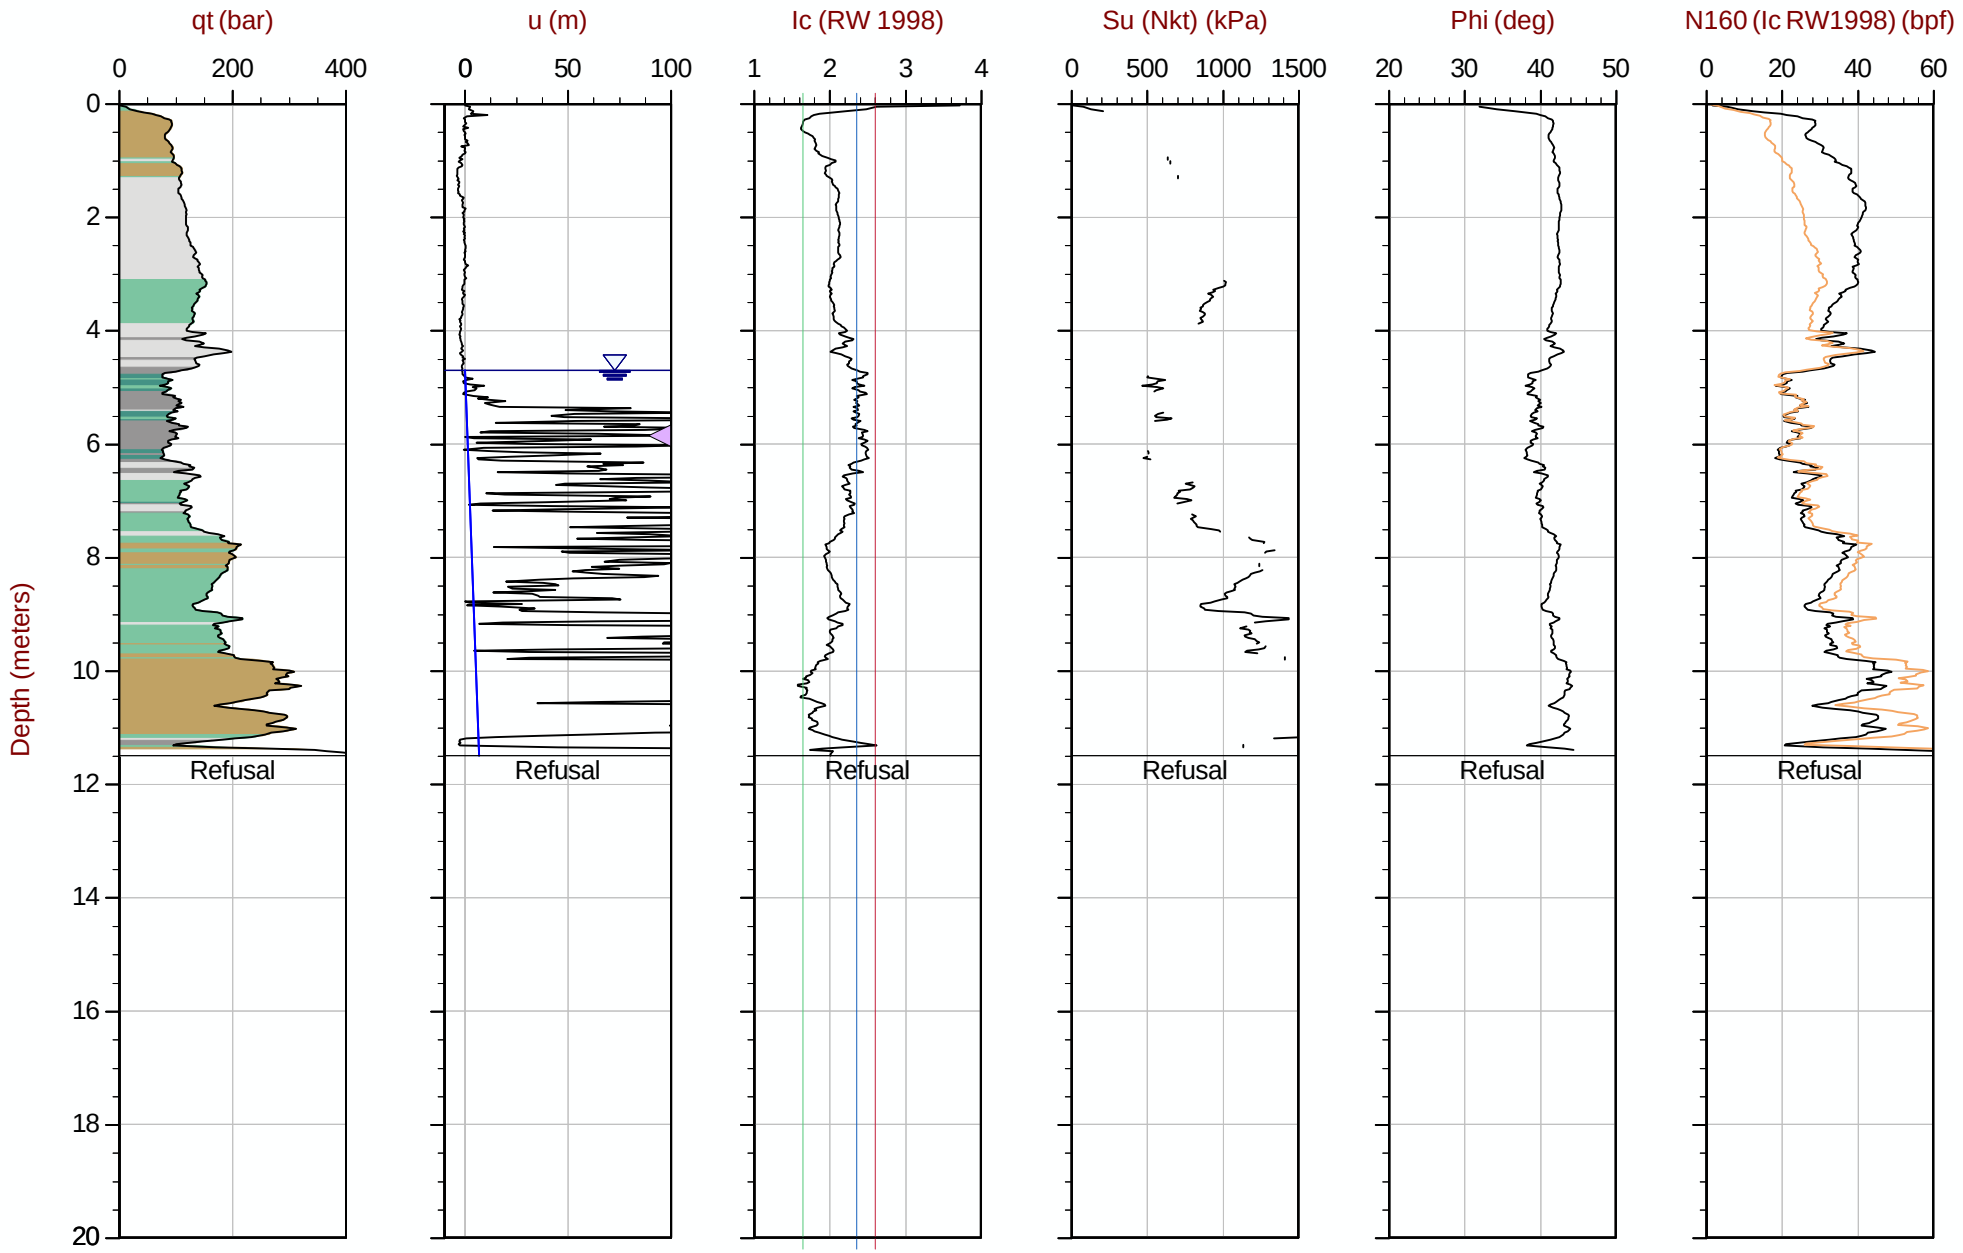

Max Depth: 11.500 m / 37.73 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT347.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 416111m Elev: 771.904m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 11:18
Site: Brooks, Alberta

Sounding: RCPT22-22CPT348
Cone: 854:T1500F15U35 Area= 15cm2

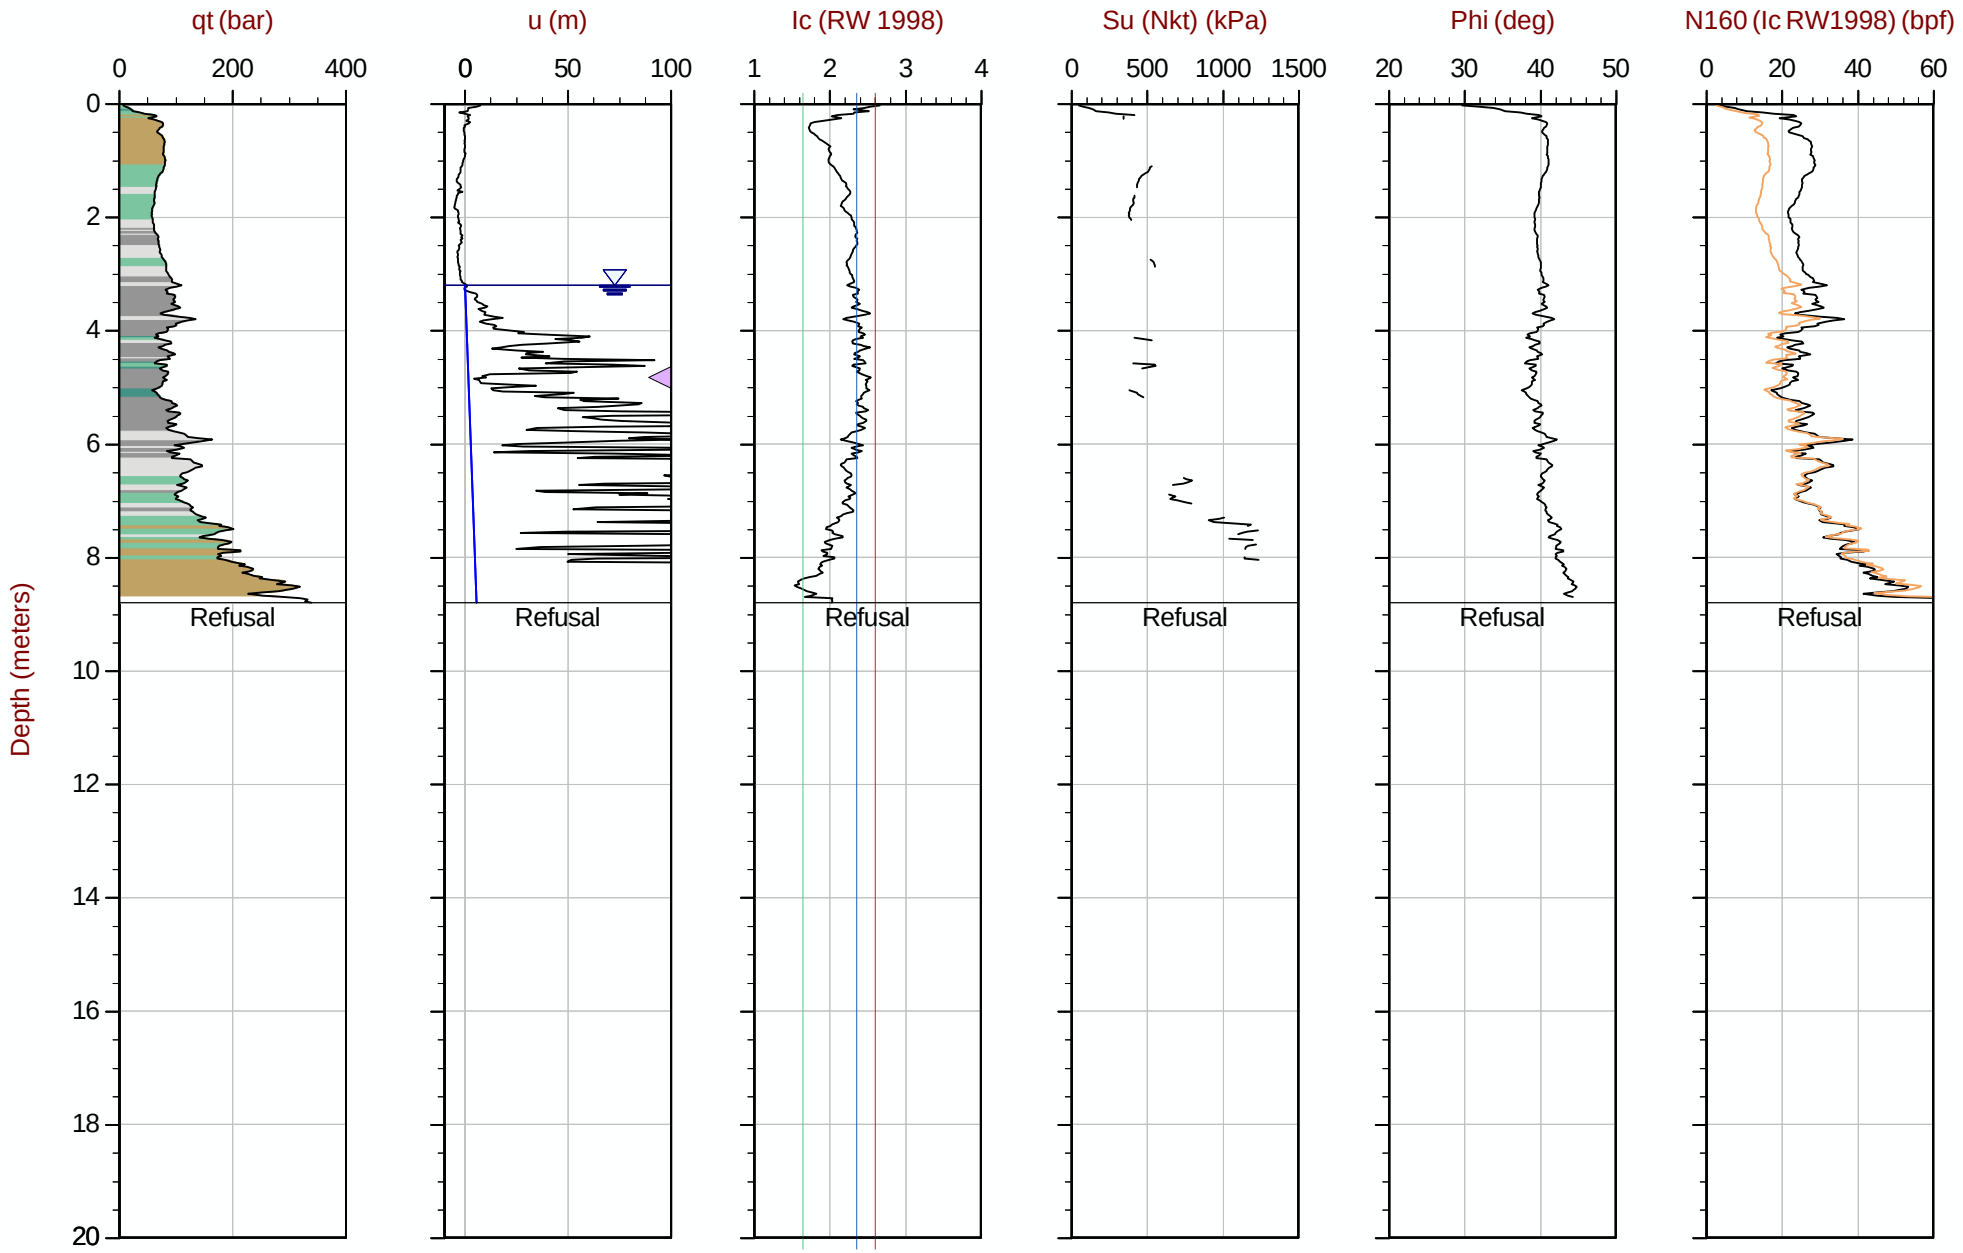

Max Depth: 8.800 m / 28.87 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT348.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609434m E: 416011m Elev: 771.568m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 16:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT350
Cone: 854:T1500F15U35 Area= 15cm2

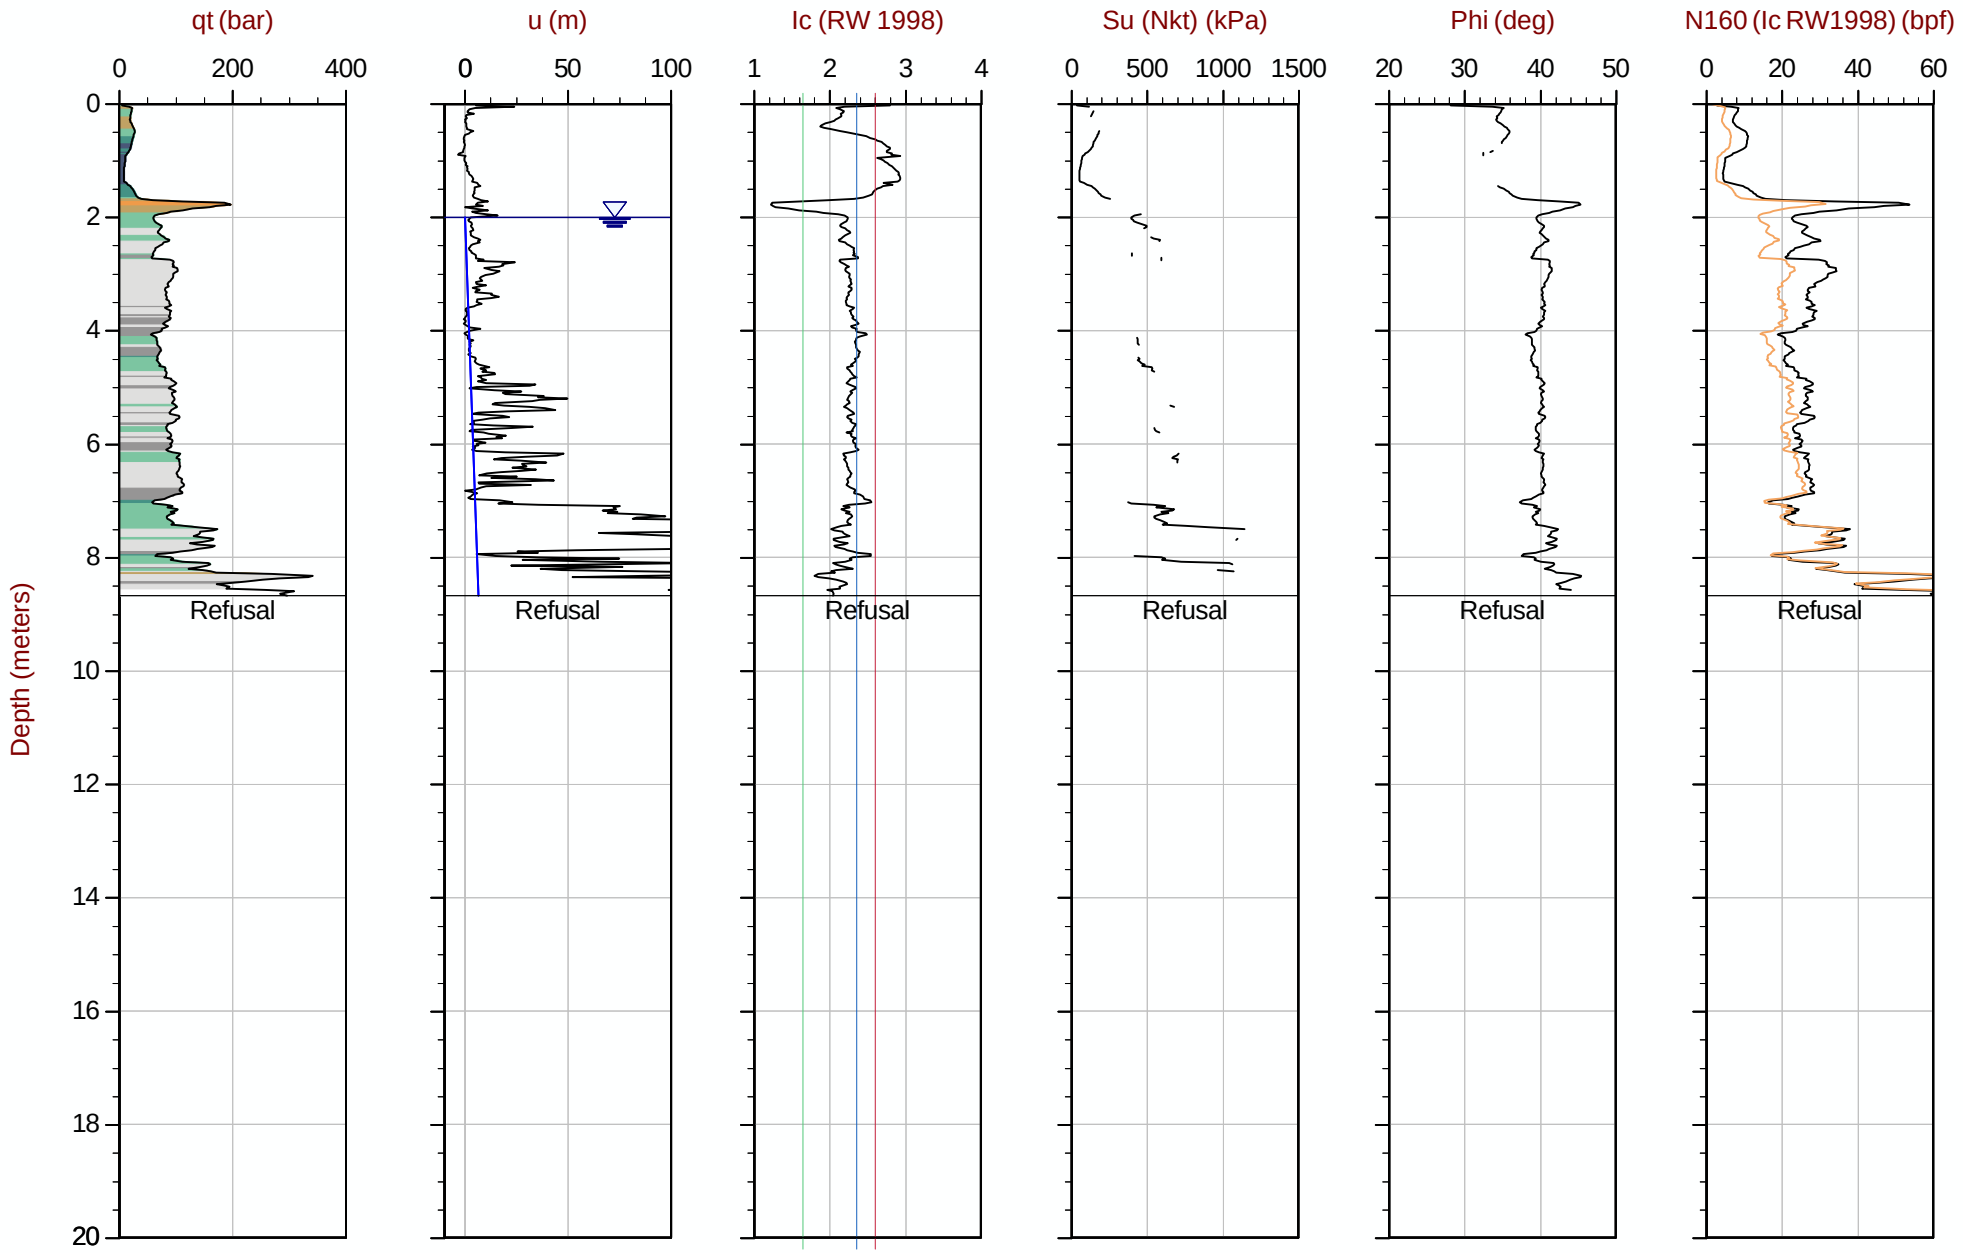

Max Depth: 8.675 m / 28.46 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT350.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609433m E: 415811m Elev: 772.579m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 09:30
Site: Brooks, Alberta

Sounding: RCPT22-22CPT351
Cone: 854:T1500F15U35 Area= 15cm2

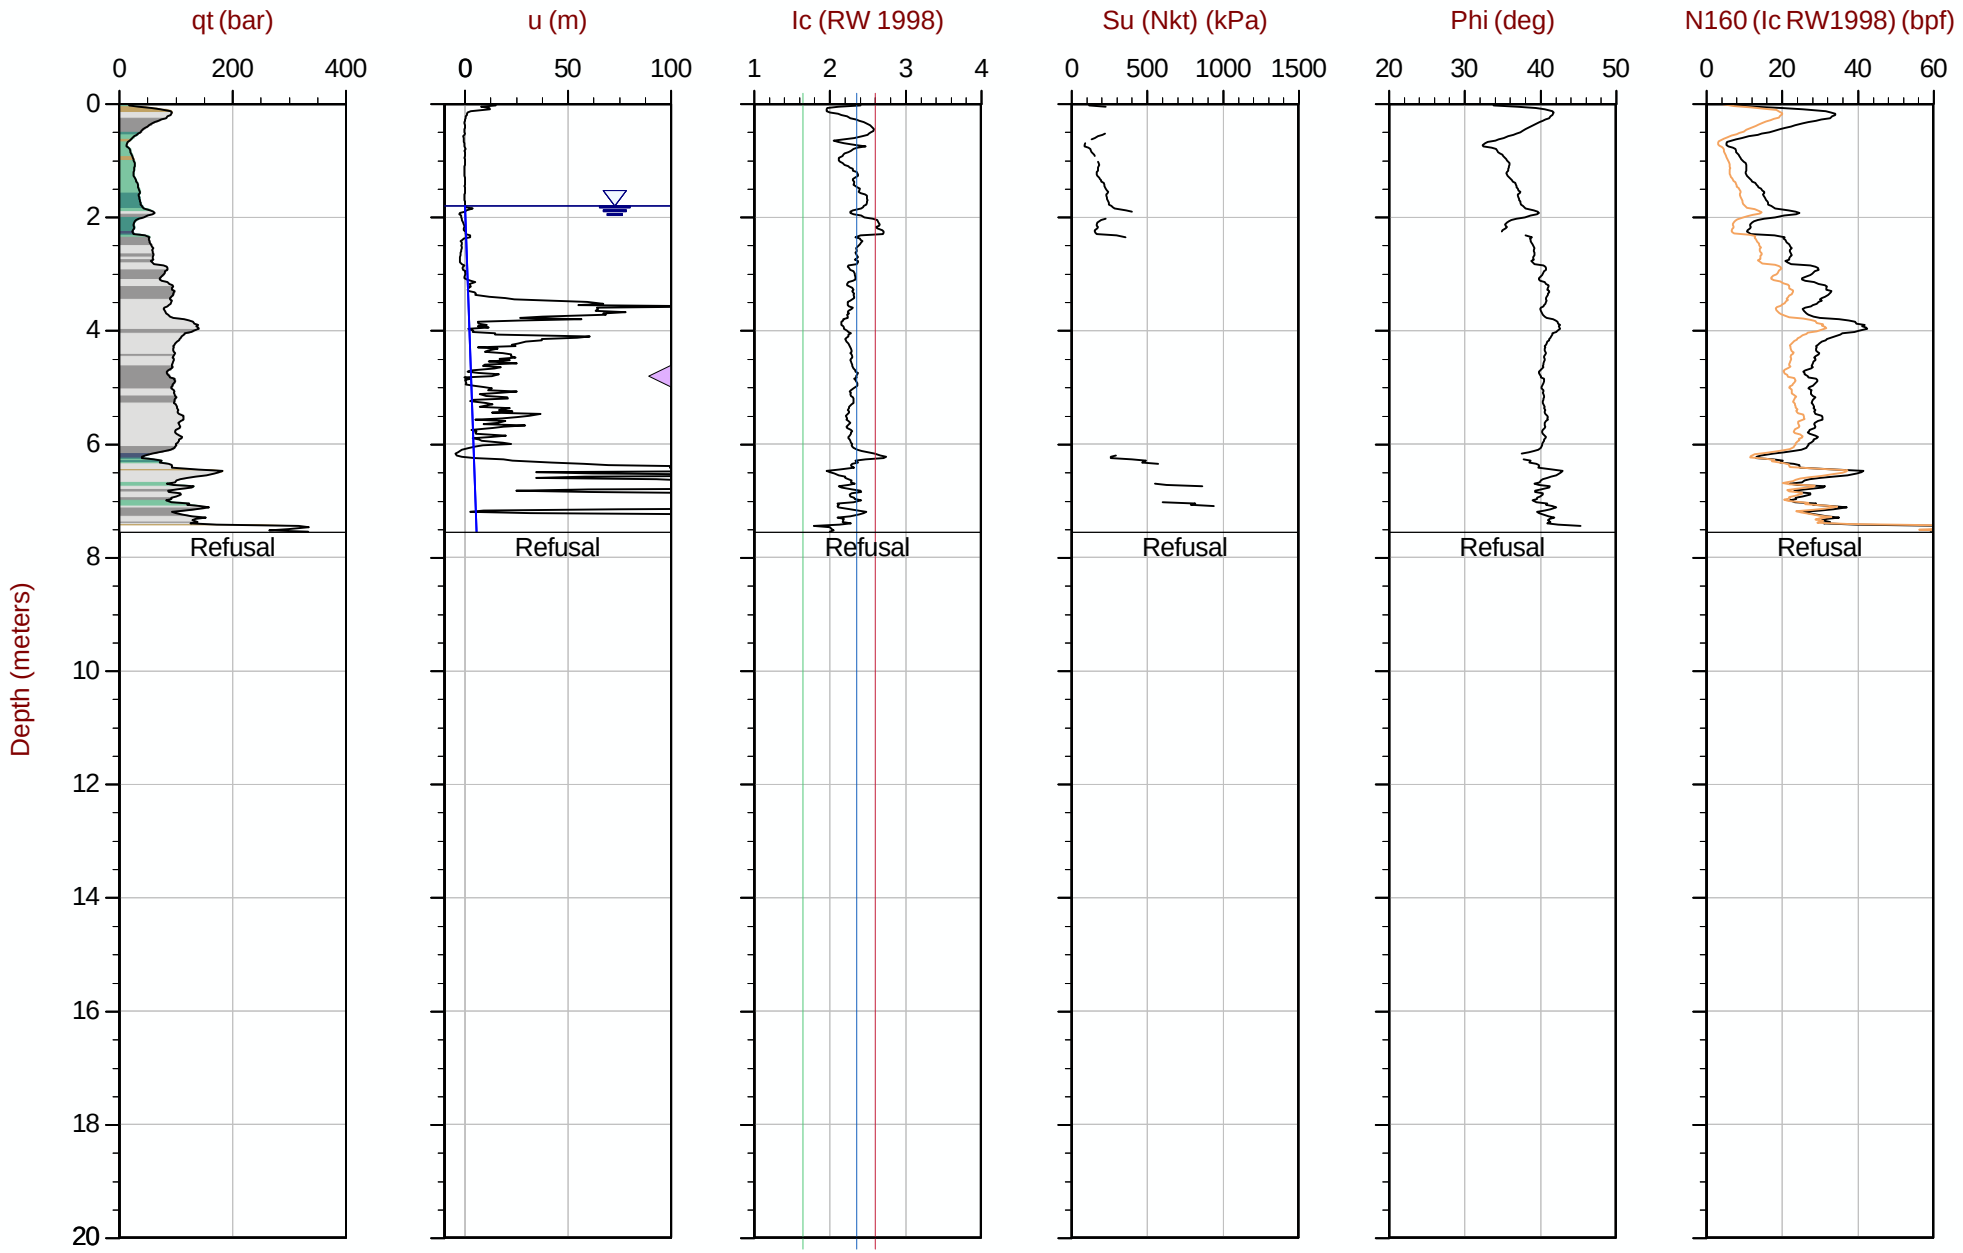

Max Depth: 7.550 m / 24.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT351.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609432m E: 415711m Elev: 772.955m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 11:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT352
Cone: 854:T1500F15U35 Area= 15cm2

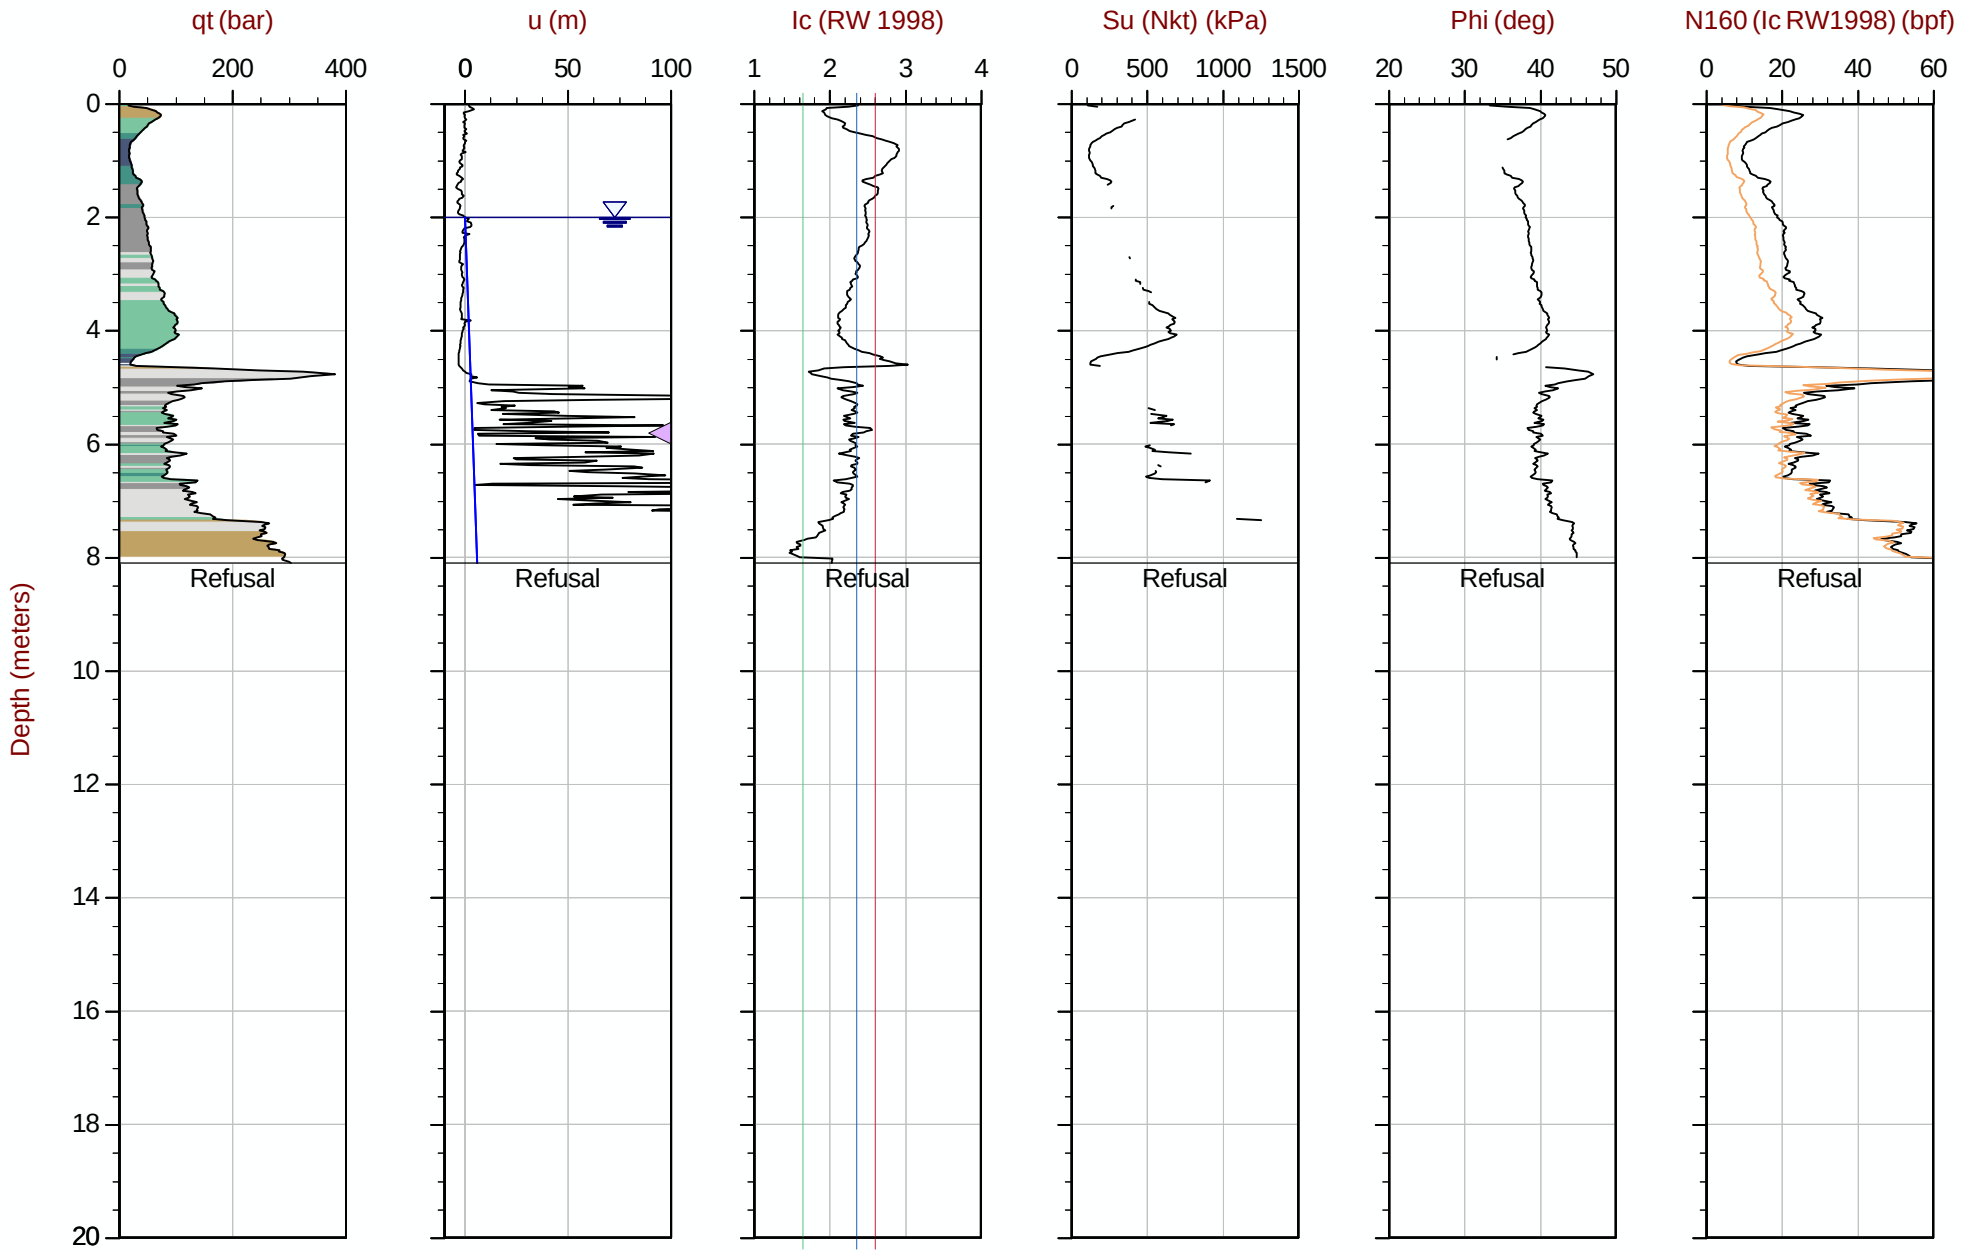

Max Depth: 8.100 m / 26.57 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT352.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609431m E: 415611m Elev: 773.677m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 14:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353
Cone: 854:T1500F15U35 Area= 15cm2

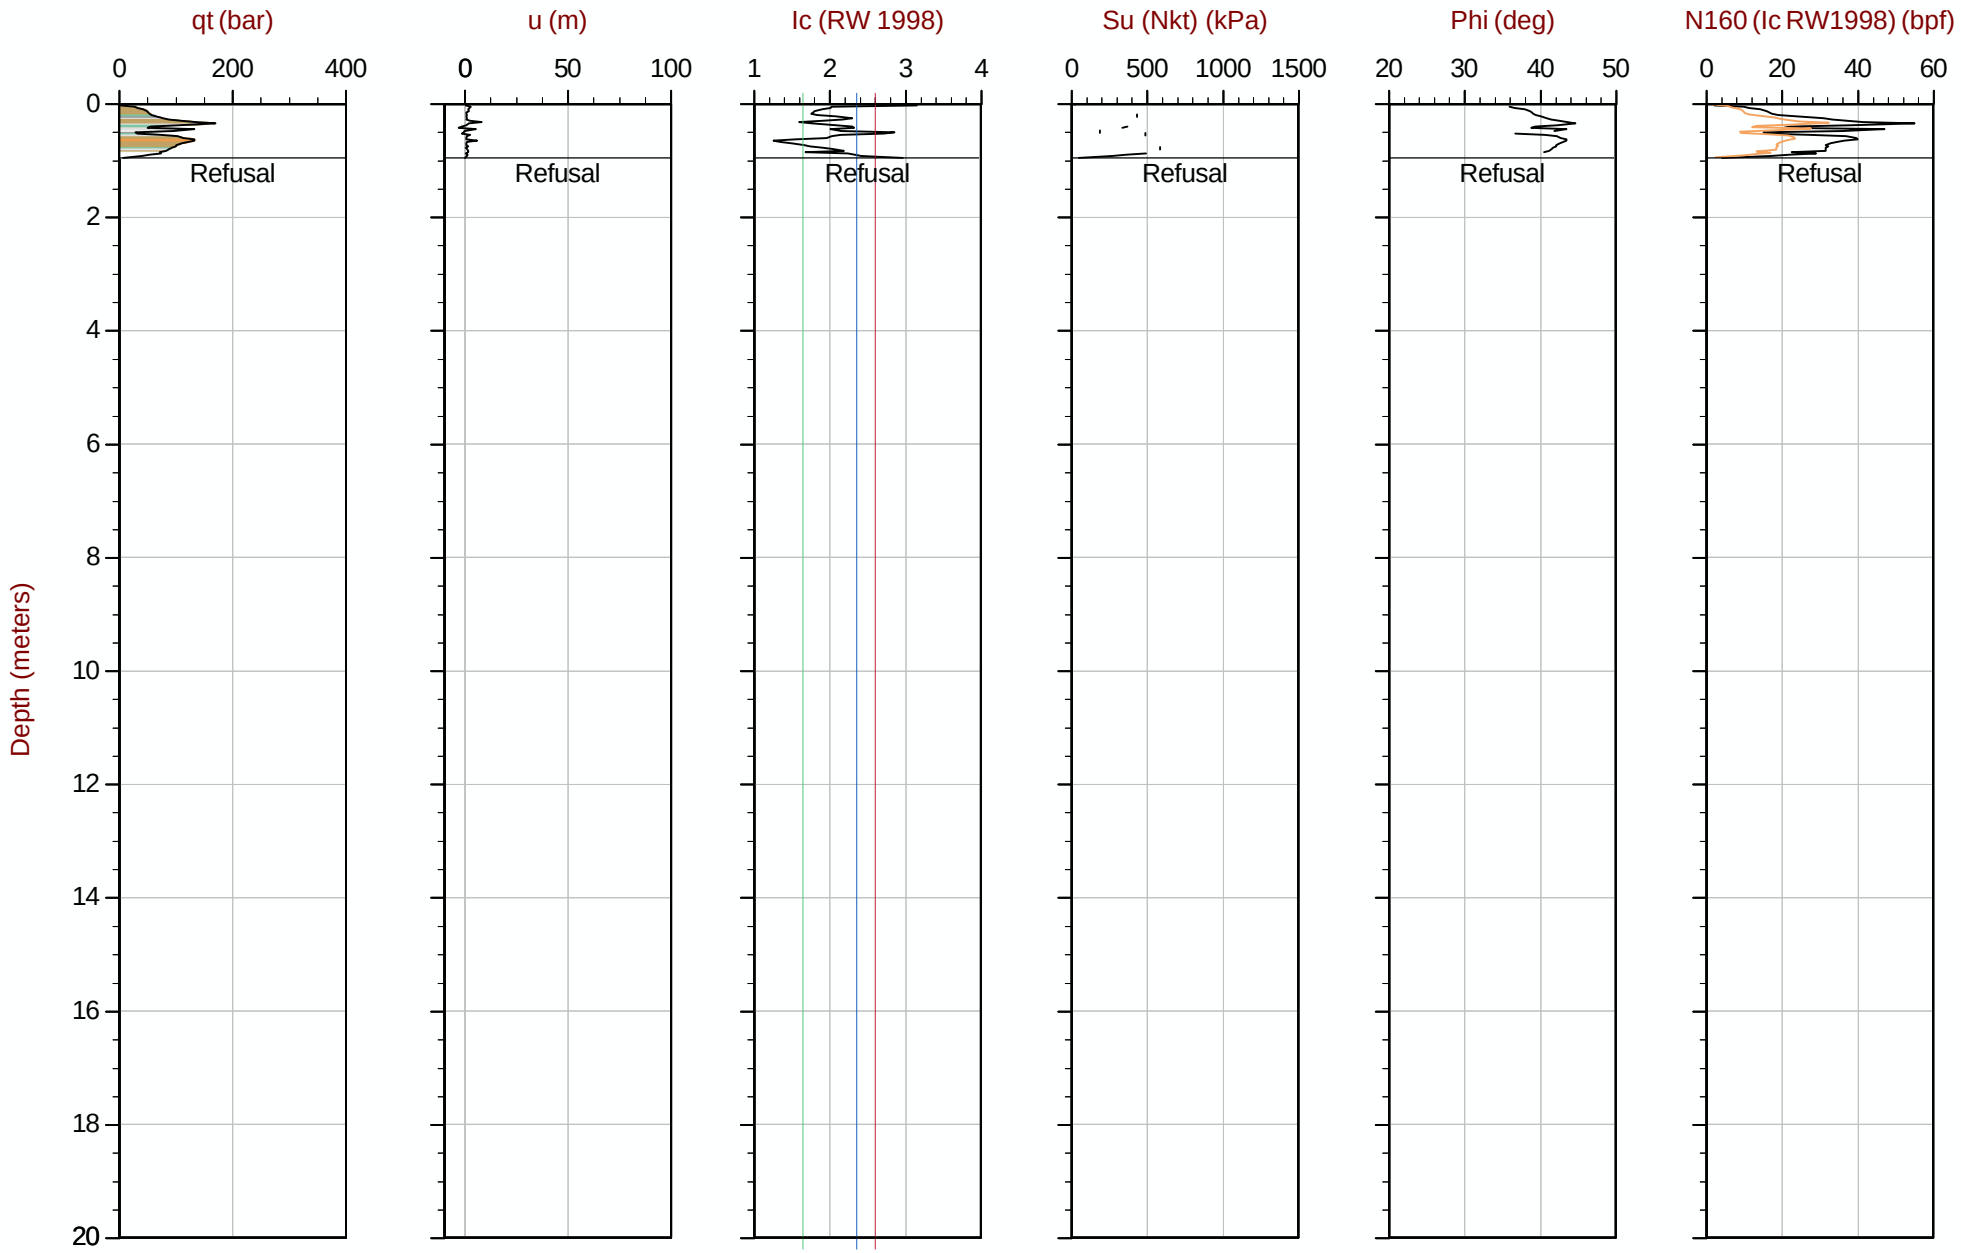

Max Depth: 0.950 m / 3.12 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT353.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609429m E: 415511m Elev: 774.095m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 15:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353B
Cone: 854:T1500F15U35 Area= 15cm2

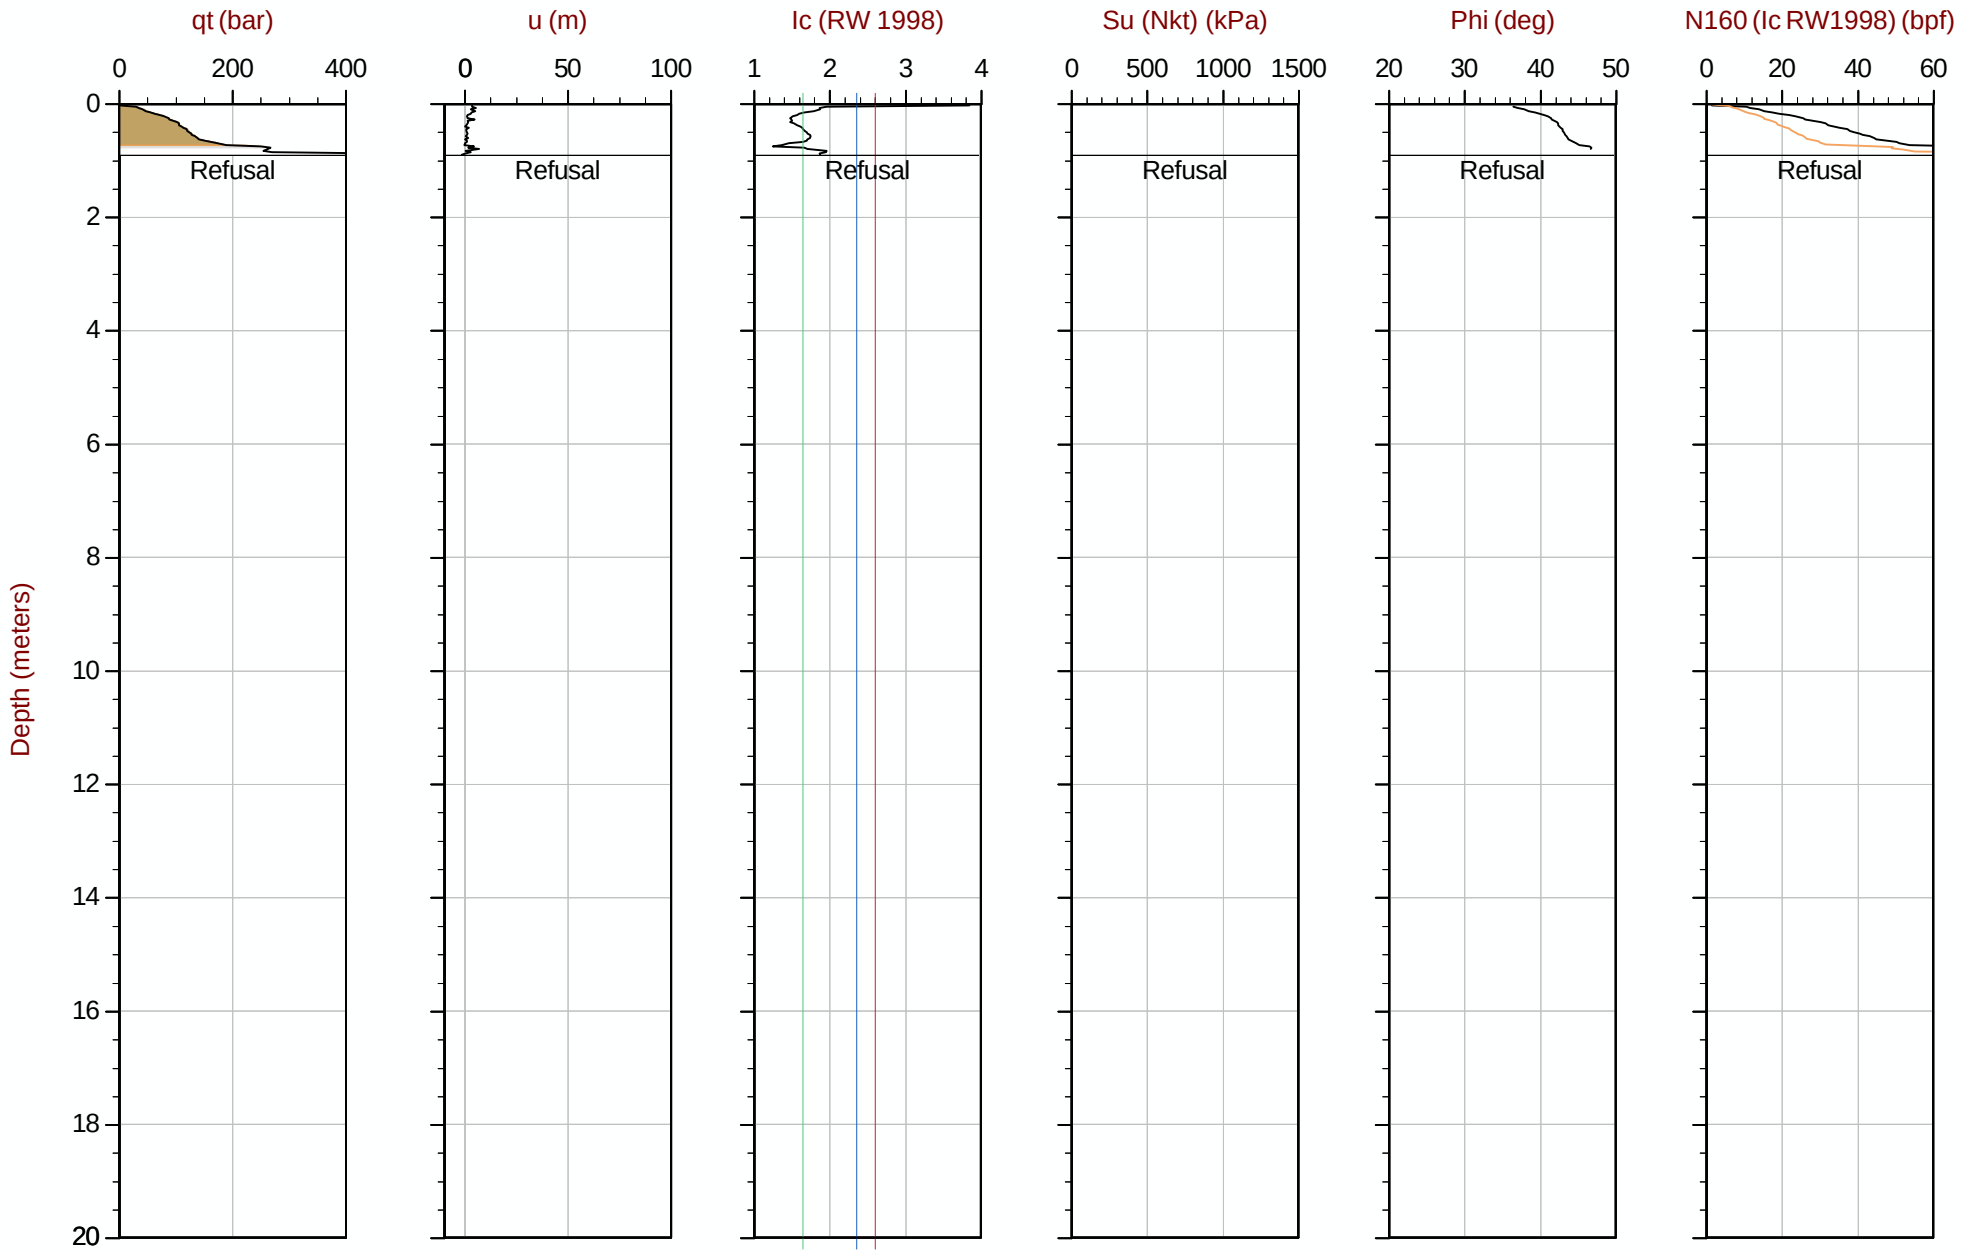

Max Depth: 0.900 m / 2.95 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT353B.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609427m E: 415511m Elev: 774.100m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 15:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353C
Cone: 854:T1500F15U35 Area= 15cm2

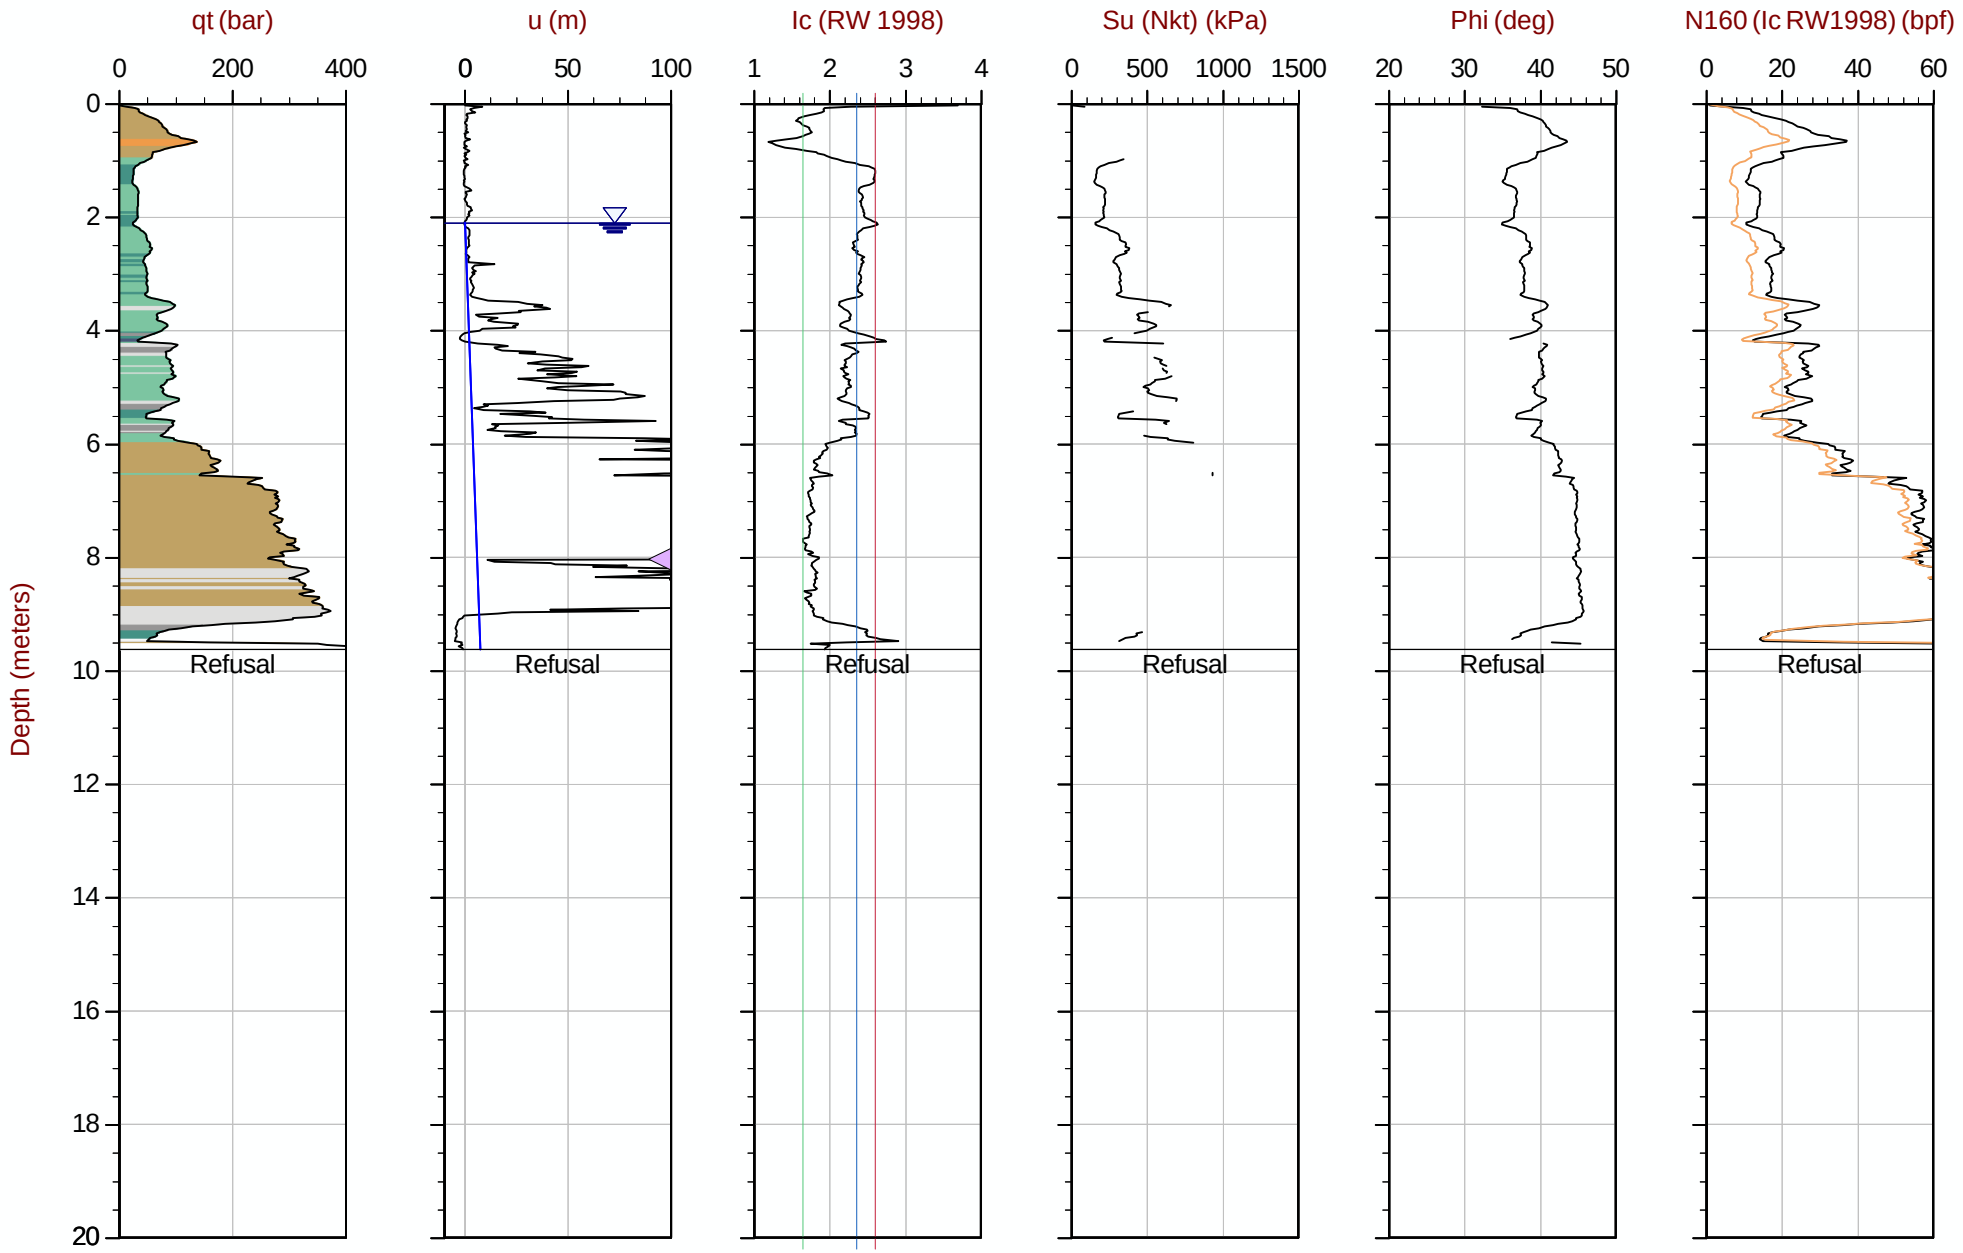

Max Depth: 9.625 m / 31.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT353C.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609425m E: 415511m Elev: 774.000m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 08:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT354
Cone: 854:T1500F15U35 Area= 15cm2

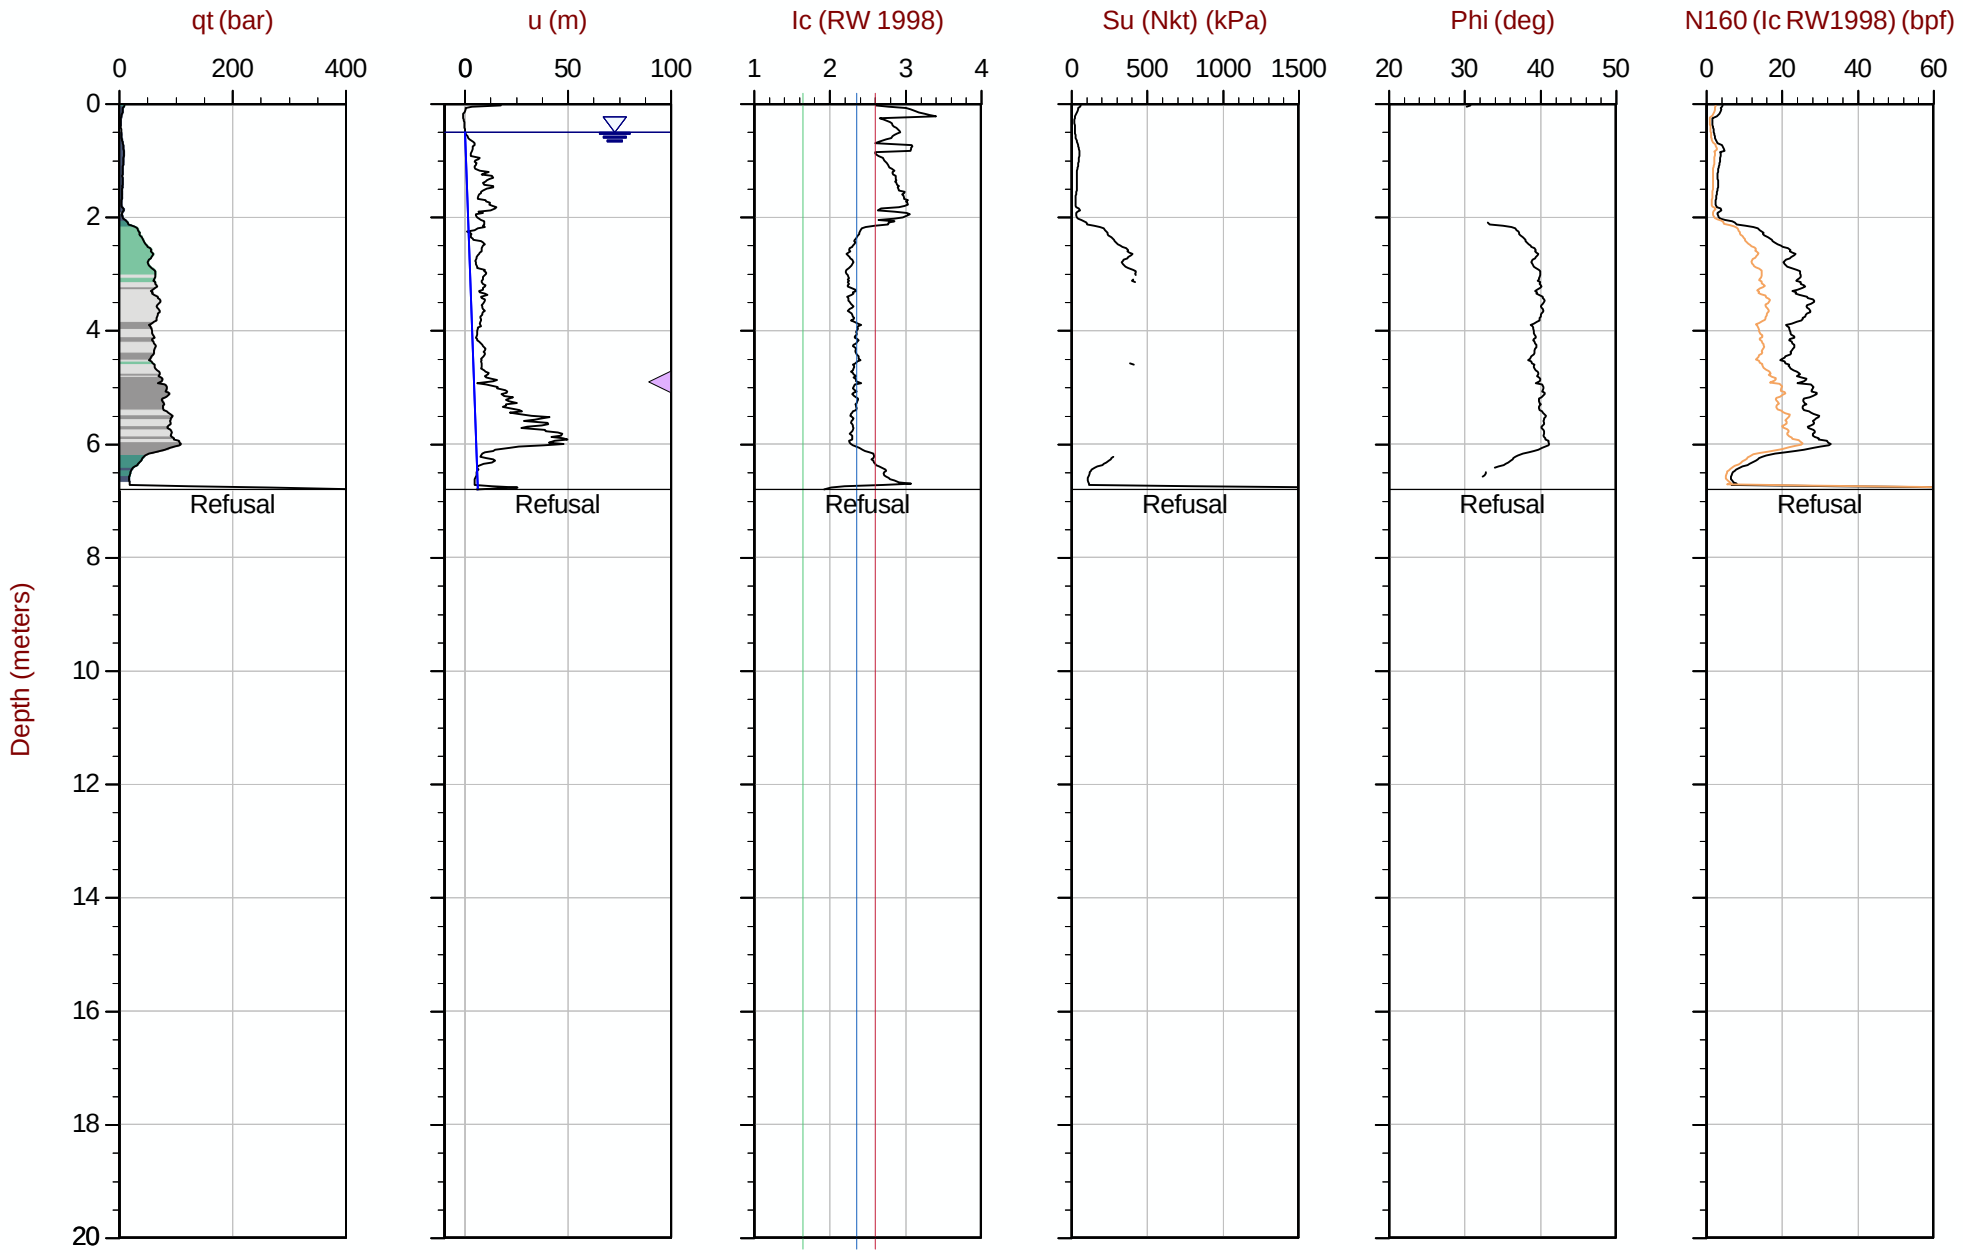

Max Depth: 6.800 m / 22.31 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT354.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 415411m Elev: 774.082m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 11:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT355
Cone: 854:T1500F15U35 Area= 15cm2

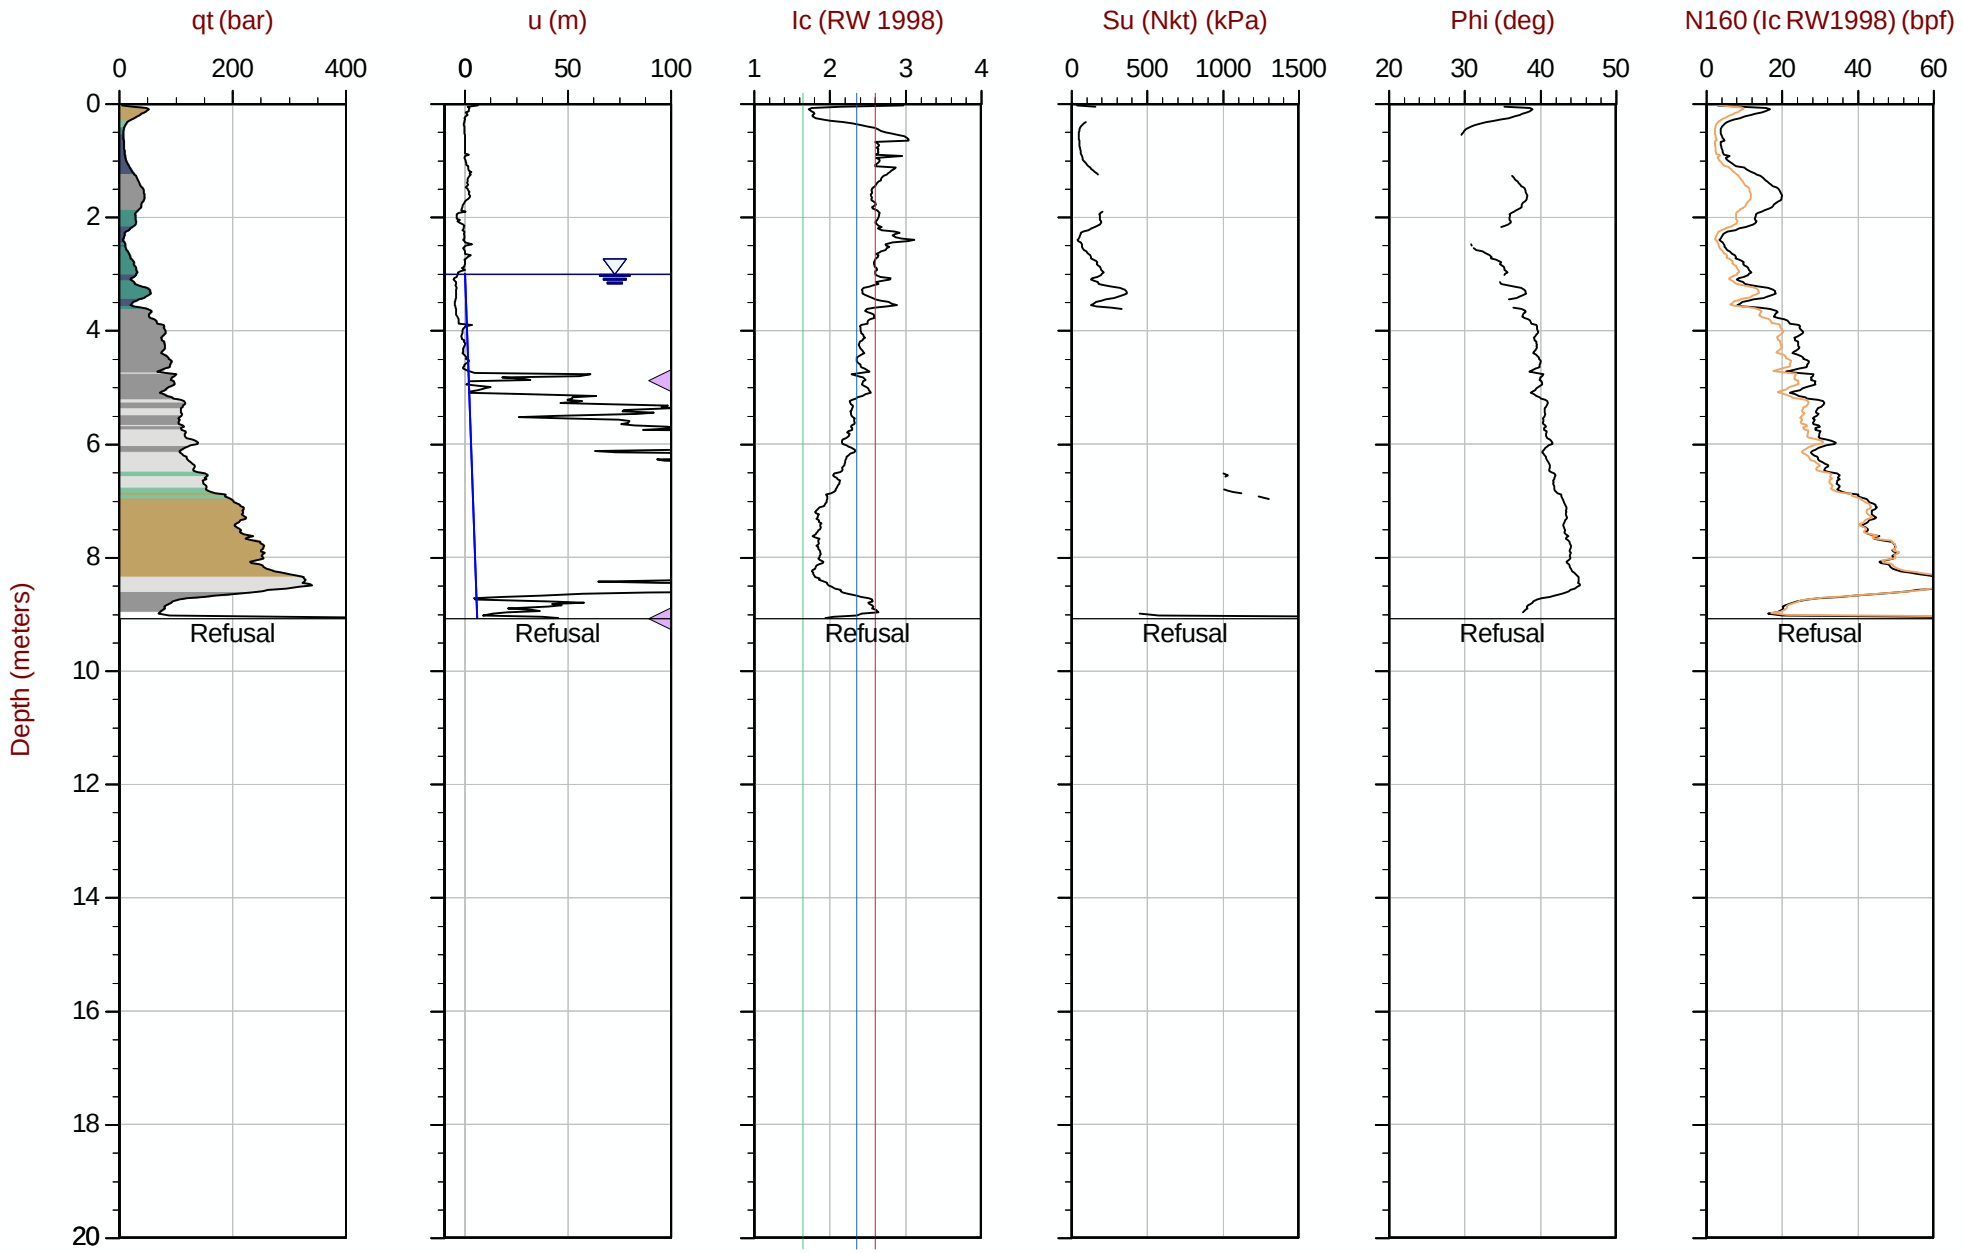

Max Depth: 9.075 m / 29.77 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT355.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 415311m Elev: 775.422m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 15:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT356
Cone: 854:T1500F15U35 Area= 15cm2

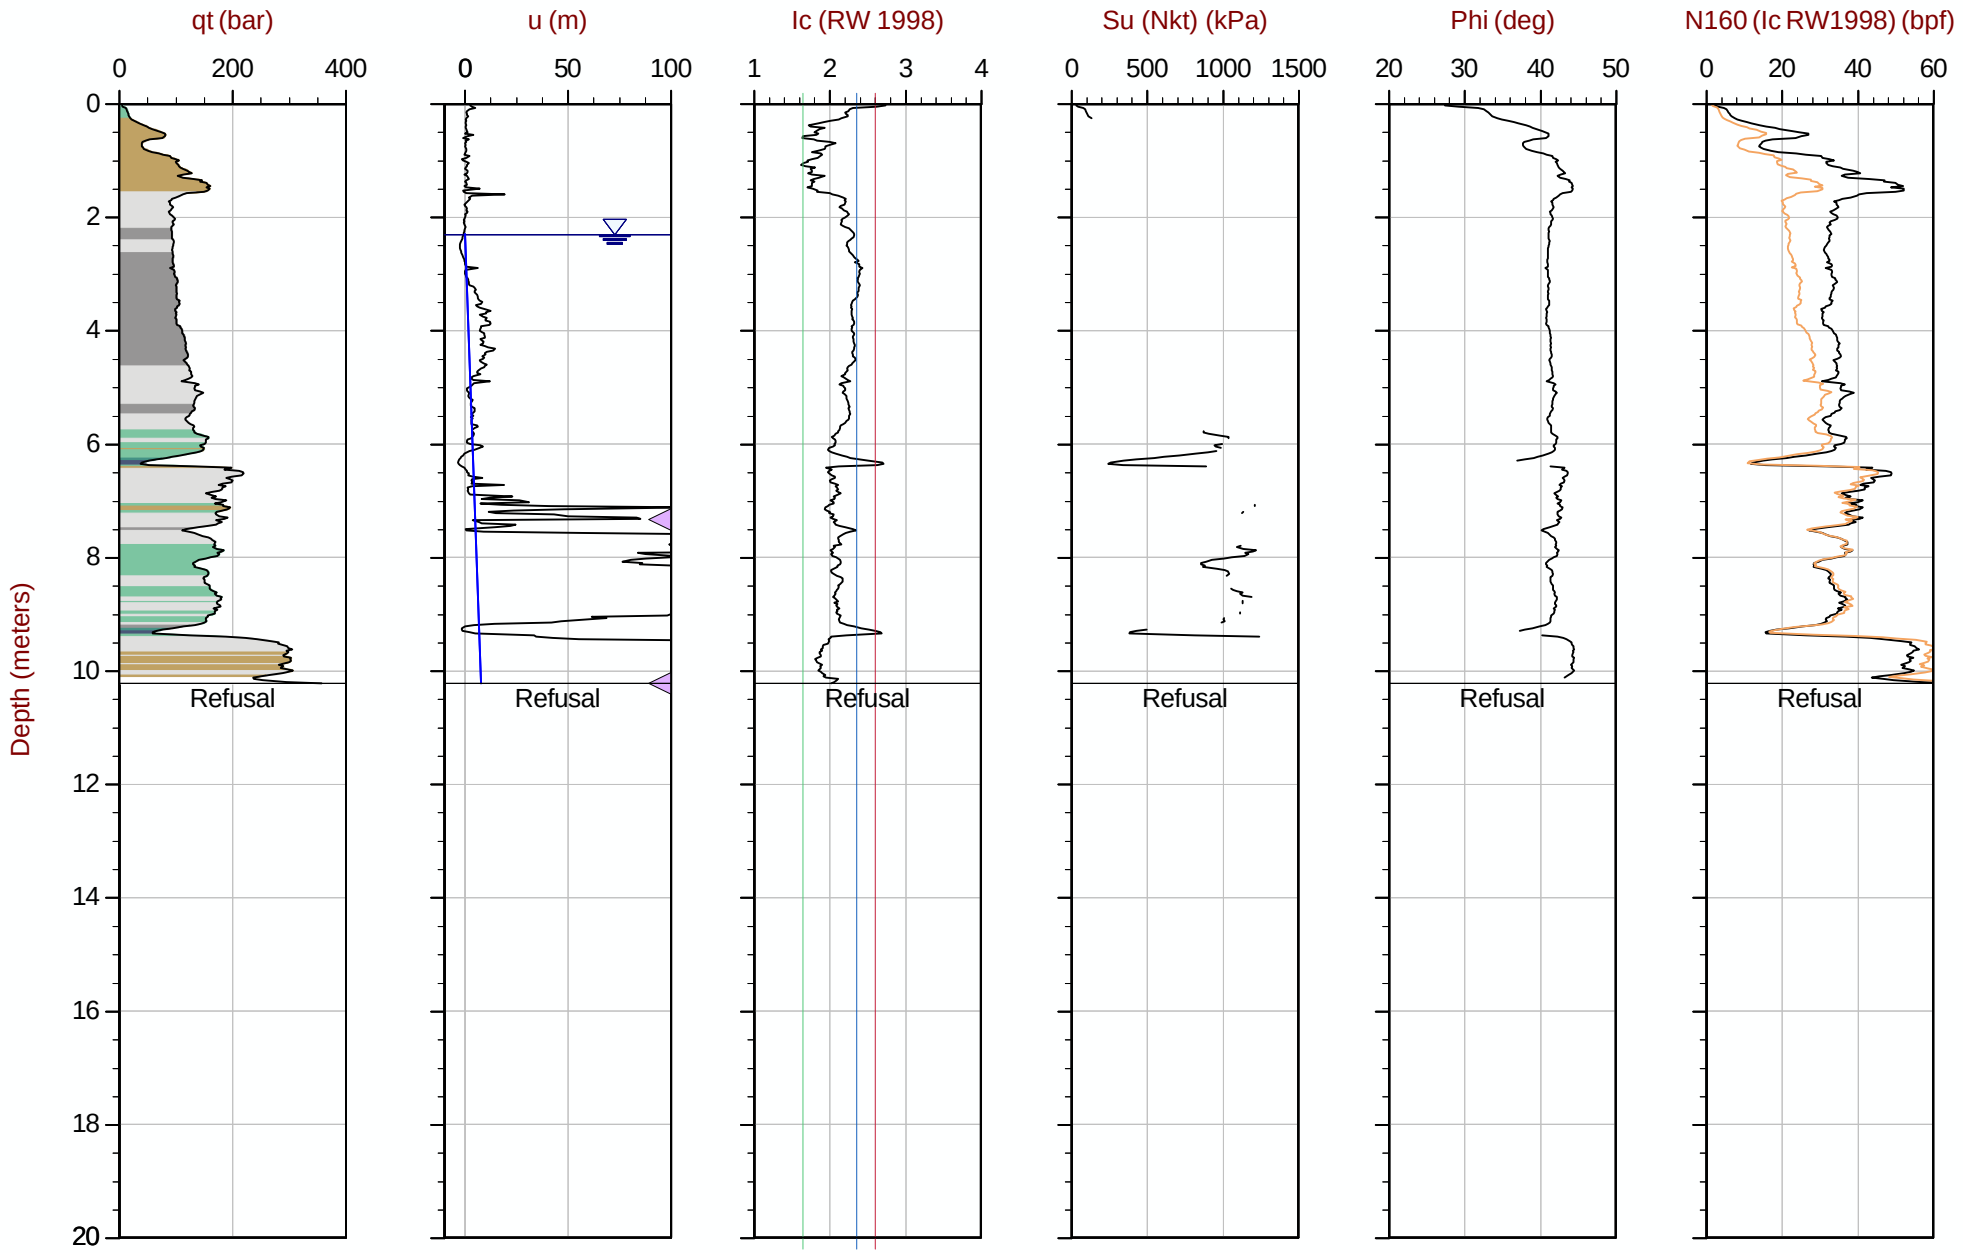

Max Depth: 10.225 m / 33.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT356.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609435m E: 415211m Elev: 778.741m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 09:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT357
Cone: 854:T1500F15U35 Area= 15cm2

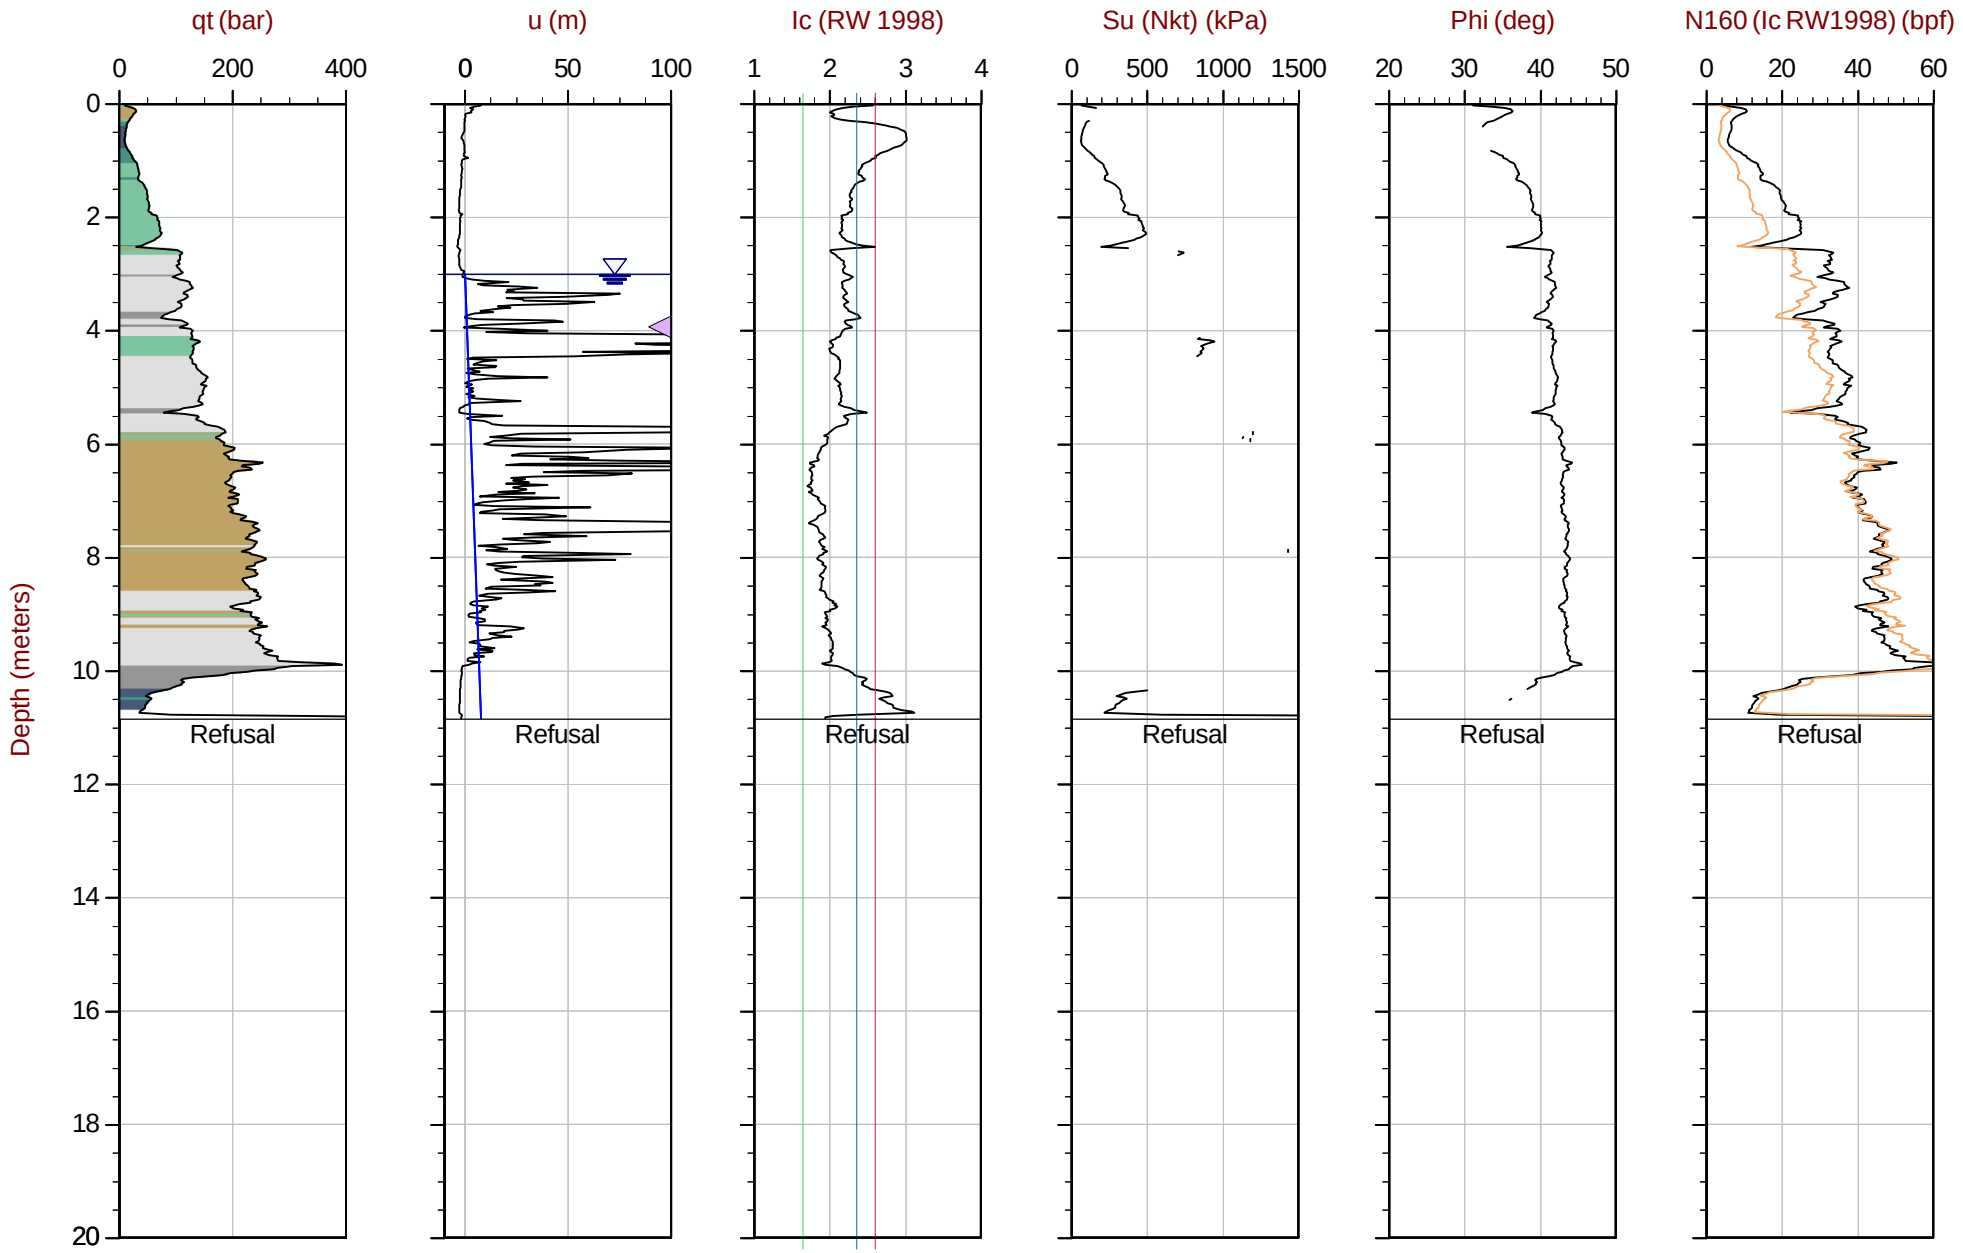

Max Depth: 10.850 m / 35.60 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT357.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 415113m Elev: 776.000m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 11:42
Site: Brooks, Alberta

Sounding: RCPT22-22CPT358
Cone: 750:T1500F15U35 Area= 15cm2

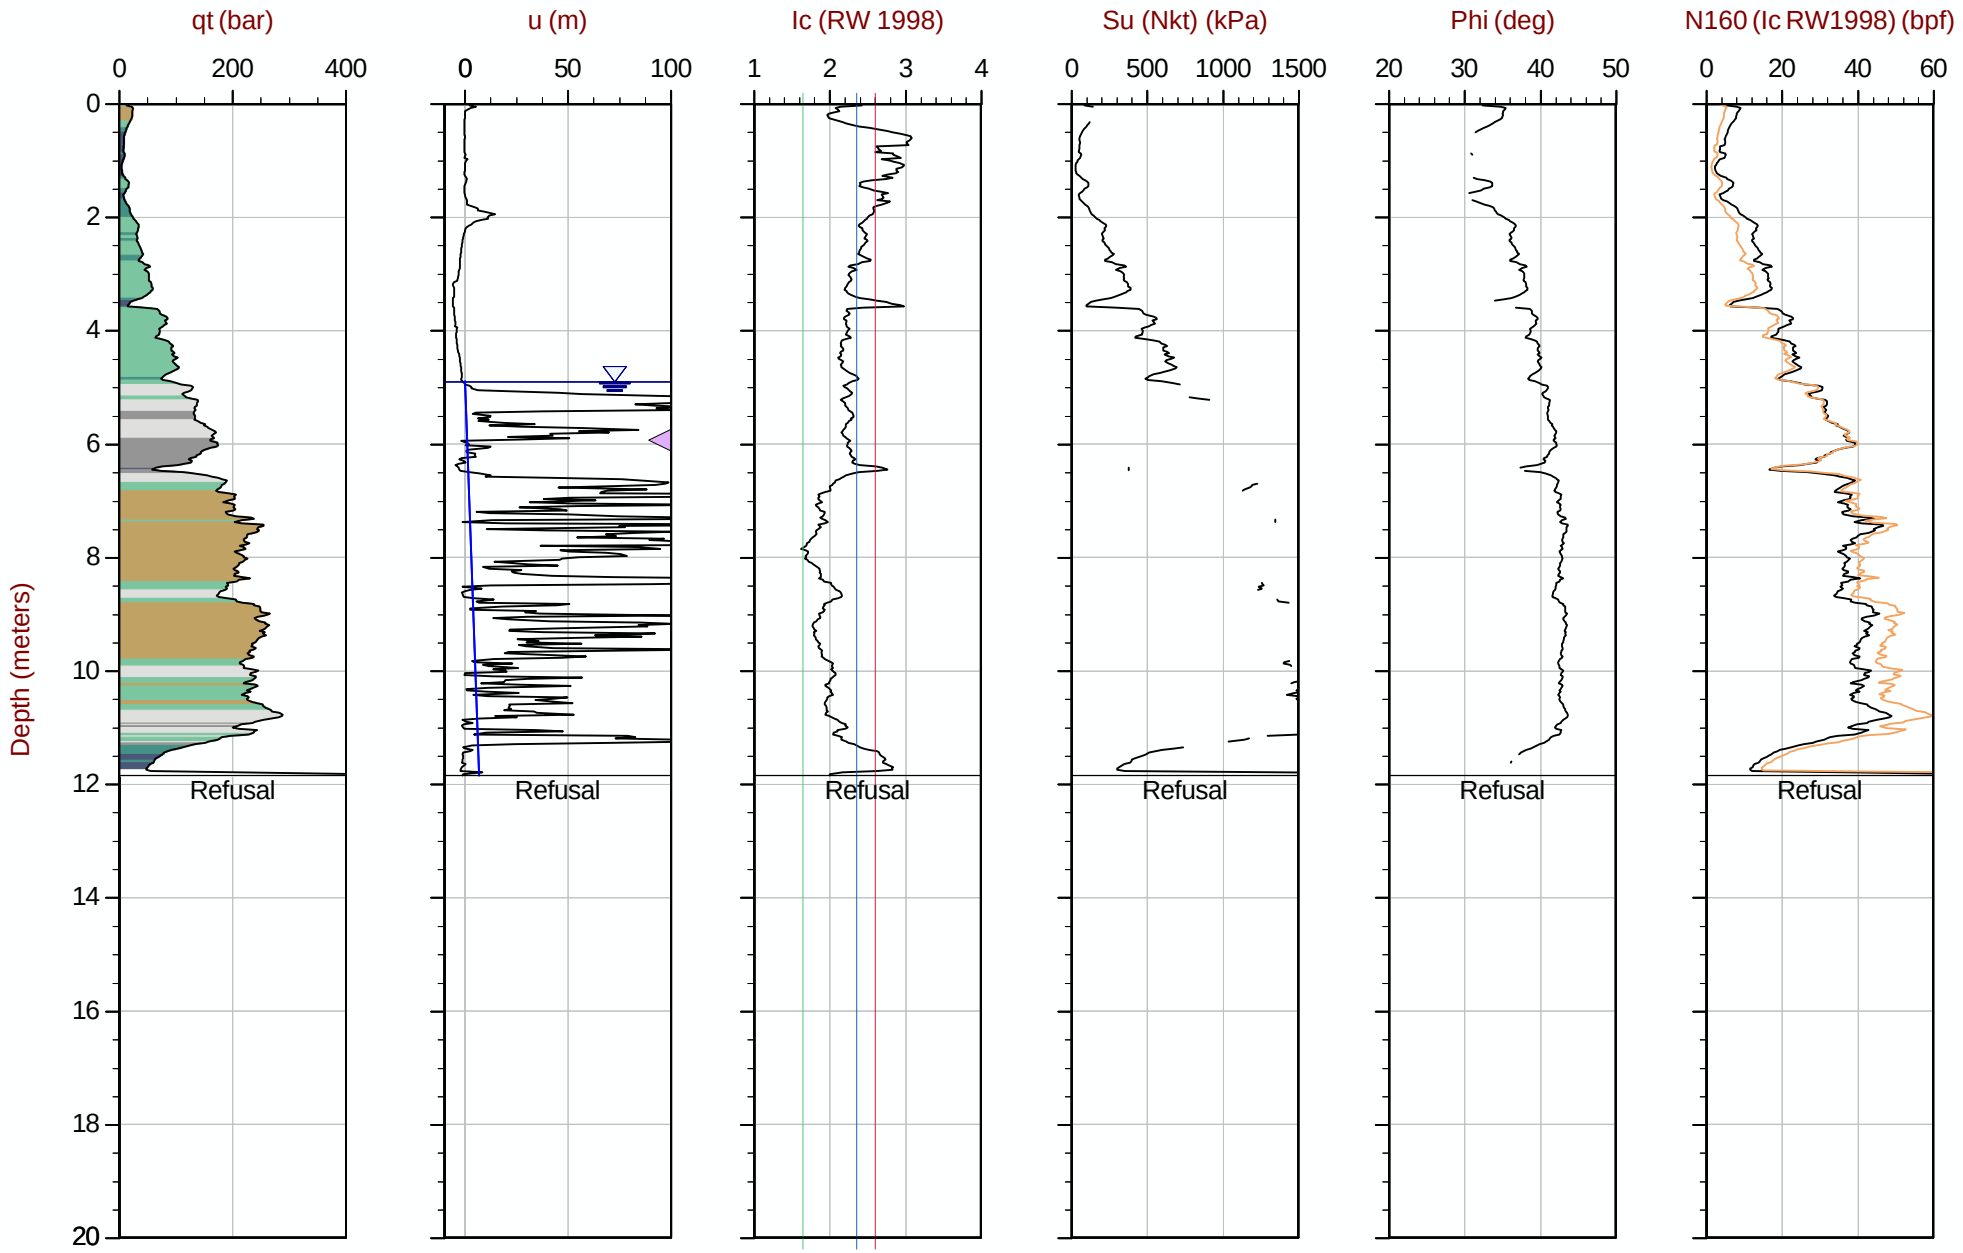

Max Depth: 11.850 m / 38.88 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT358.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609425m E: 415011m Elev: 776.048m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 15:39
Site: Brooks, Alberta

Sounding: RCPT22-22CPT359
Cone: 821:T1000F10U35 Area= 15cm2

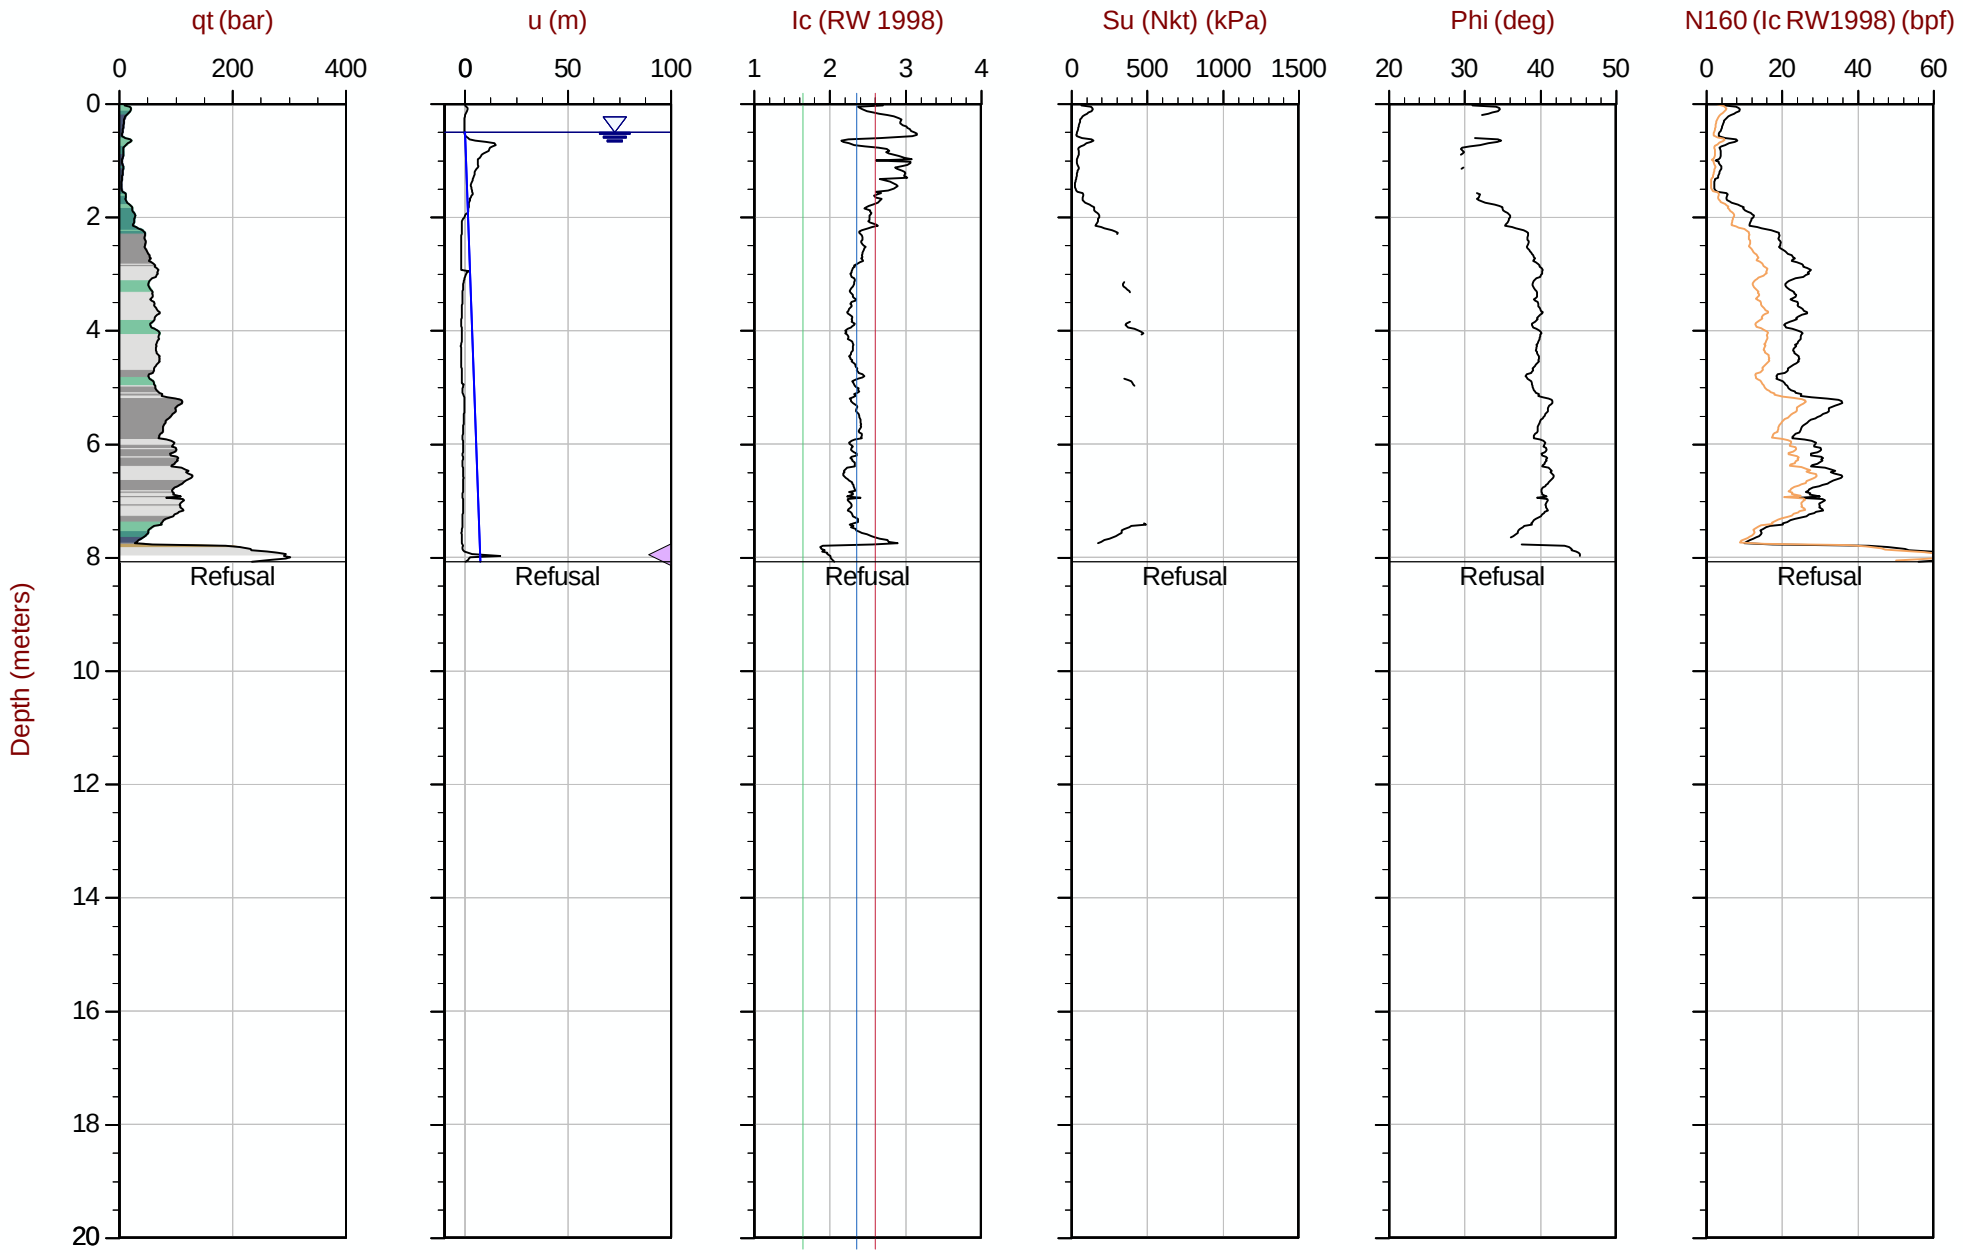

Max Depth: 8.075 m / 26.49 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT359.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609426m E: 414911m Elev: 776.614m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 07:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT360
Cone: 821:T1000F10U35 Area= 15cm2

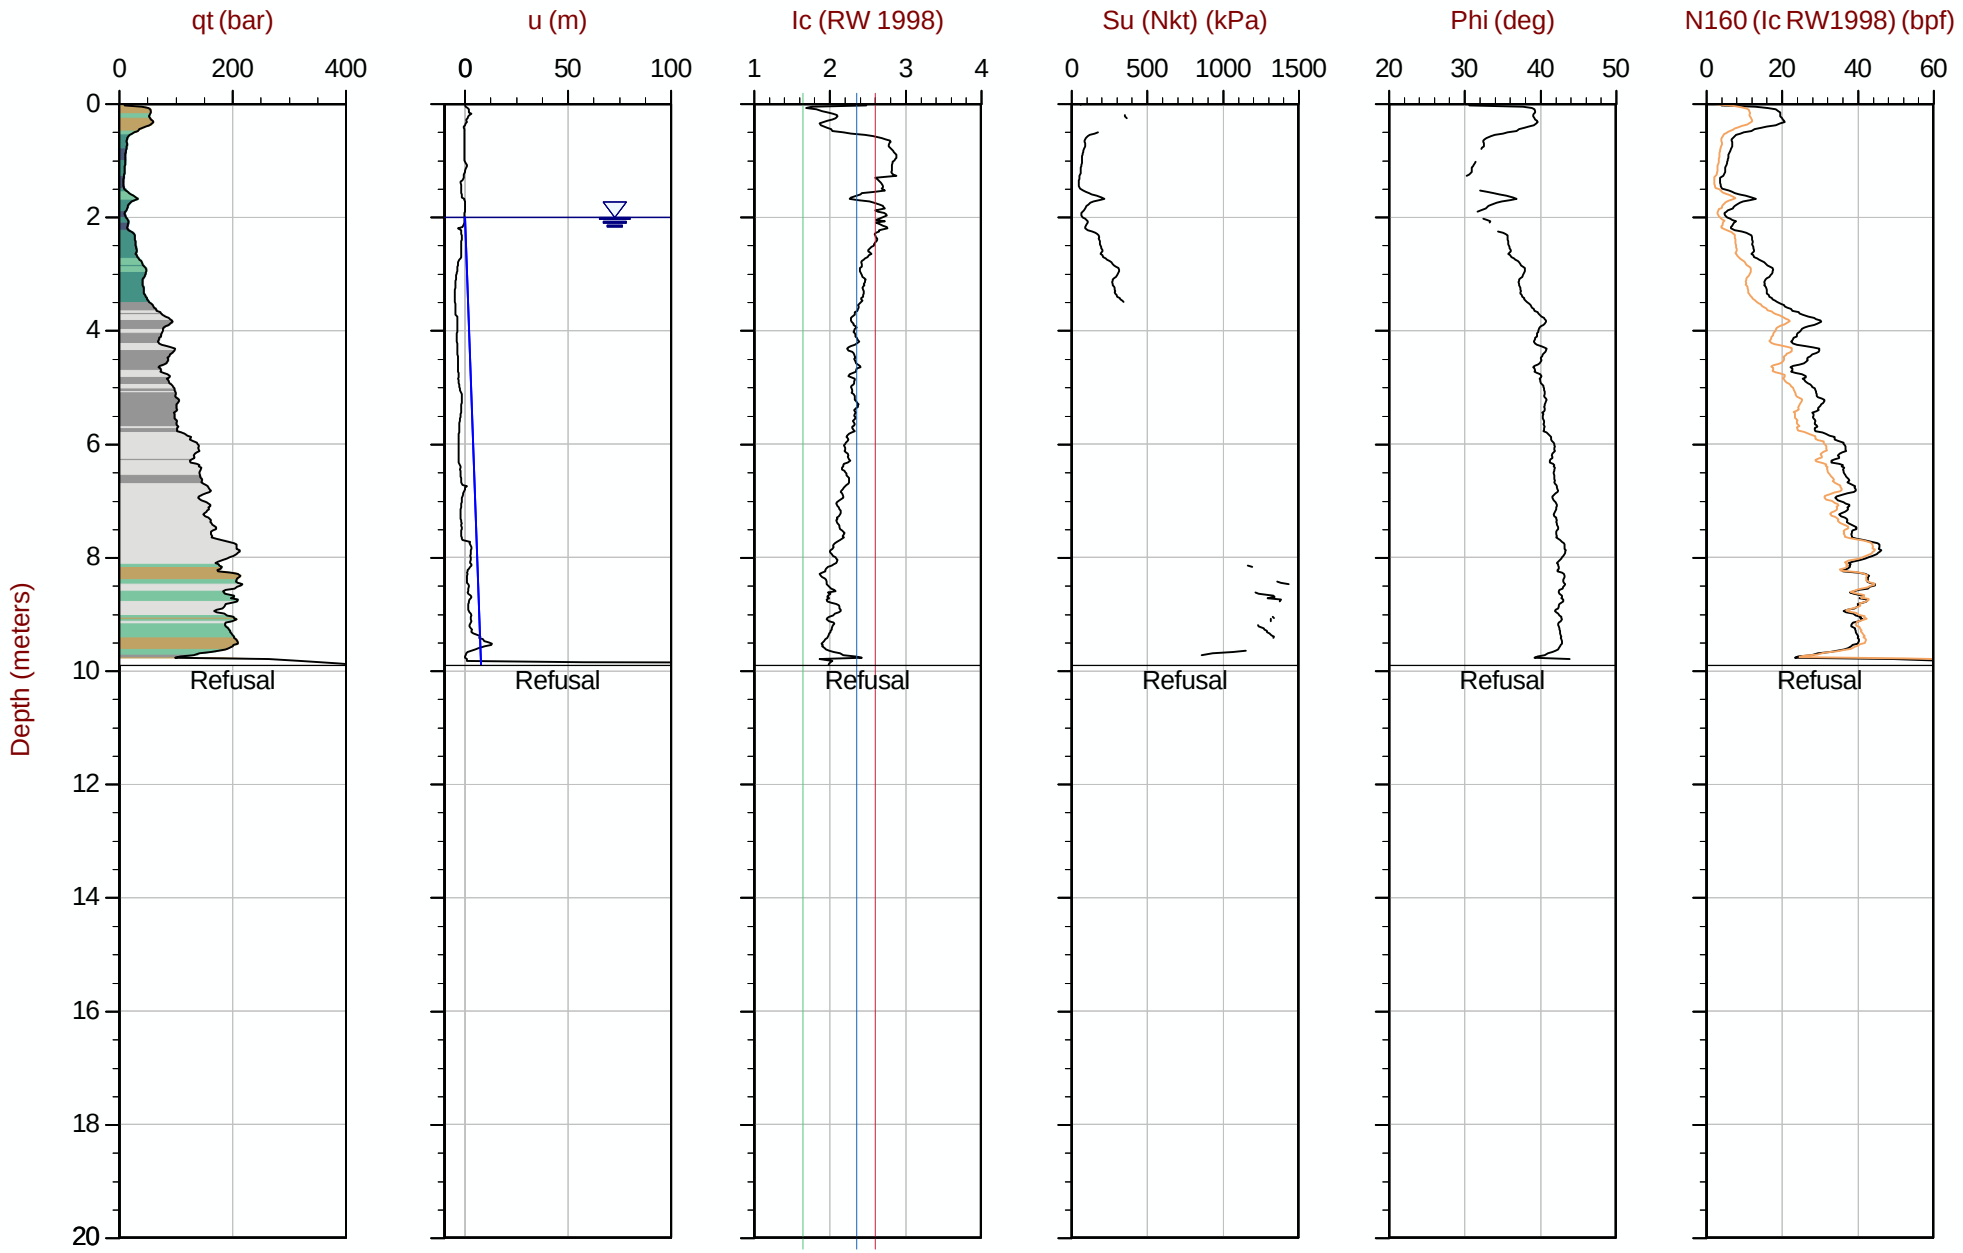

Max Depth: 9.900 m / 32.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RP22-22CPT360.COR
Unit Wt: SBTQtn (PKR2009)
Su Nkt: 15.0

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609431m E: 414811m Elev: 778.729m
Sheet No: 1 of 1

Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

Seismic Cone Penetration Test Plots


CONETEC

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 09:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT100
Cone: 750:T1500F15U35 Area= 15cm2

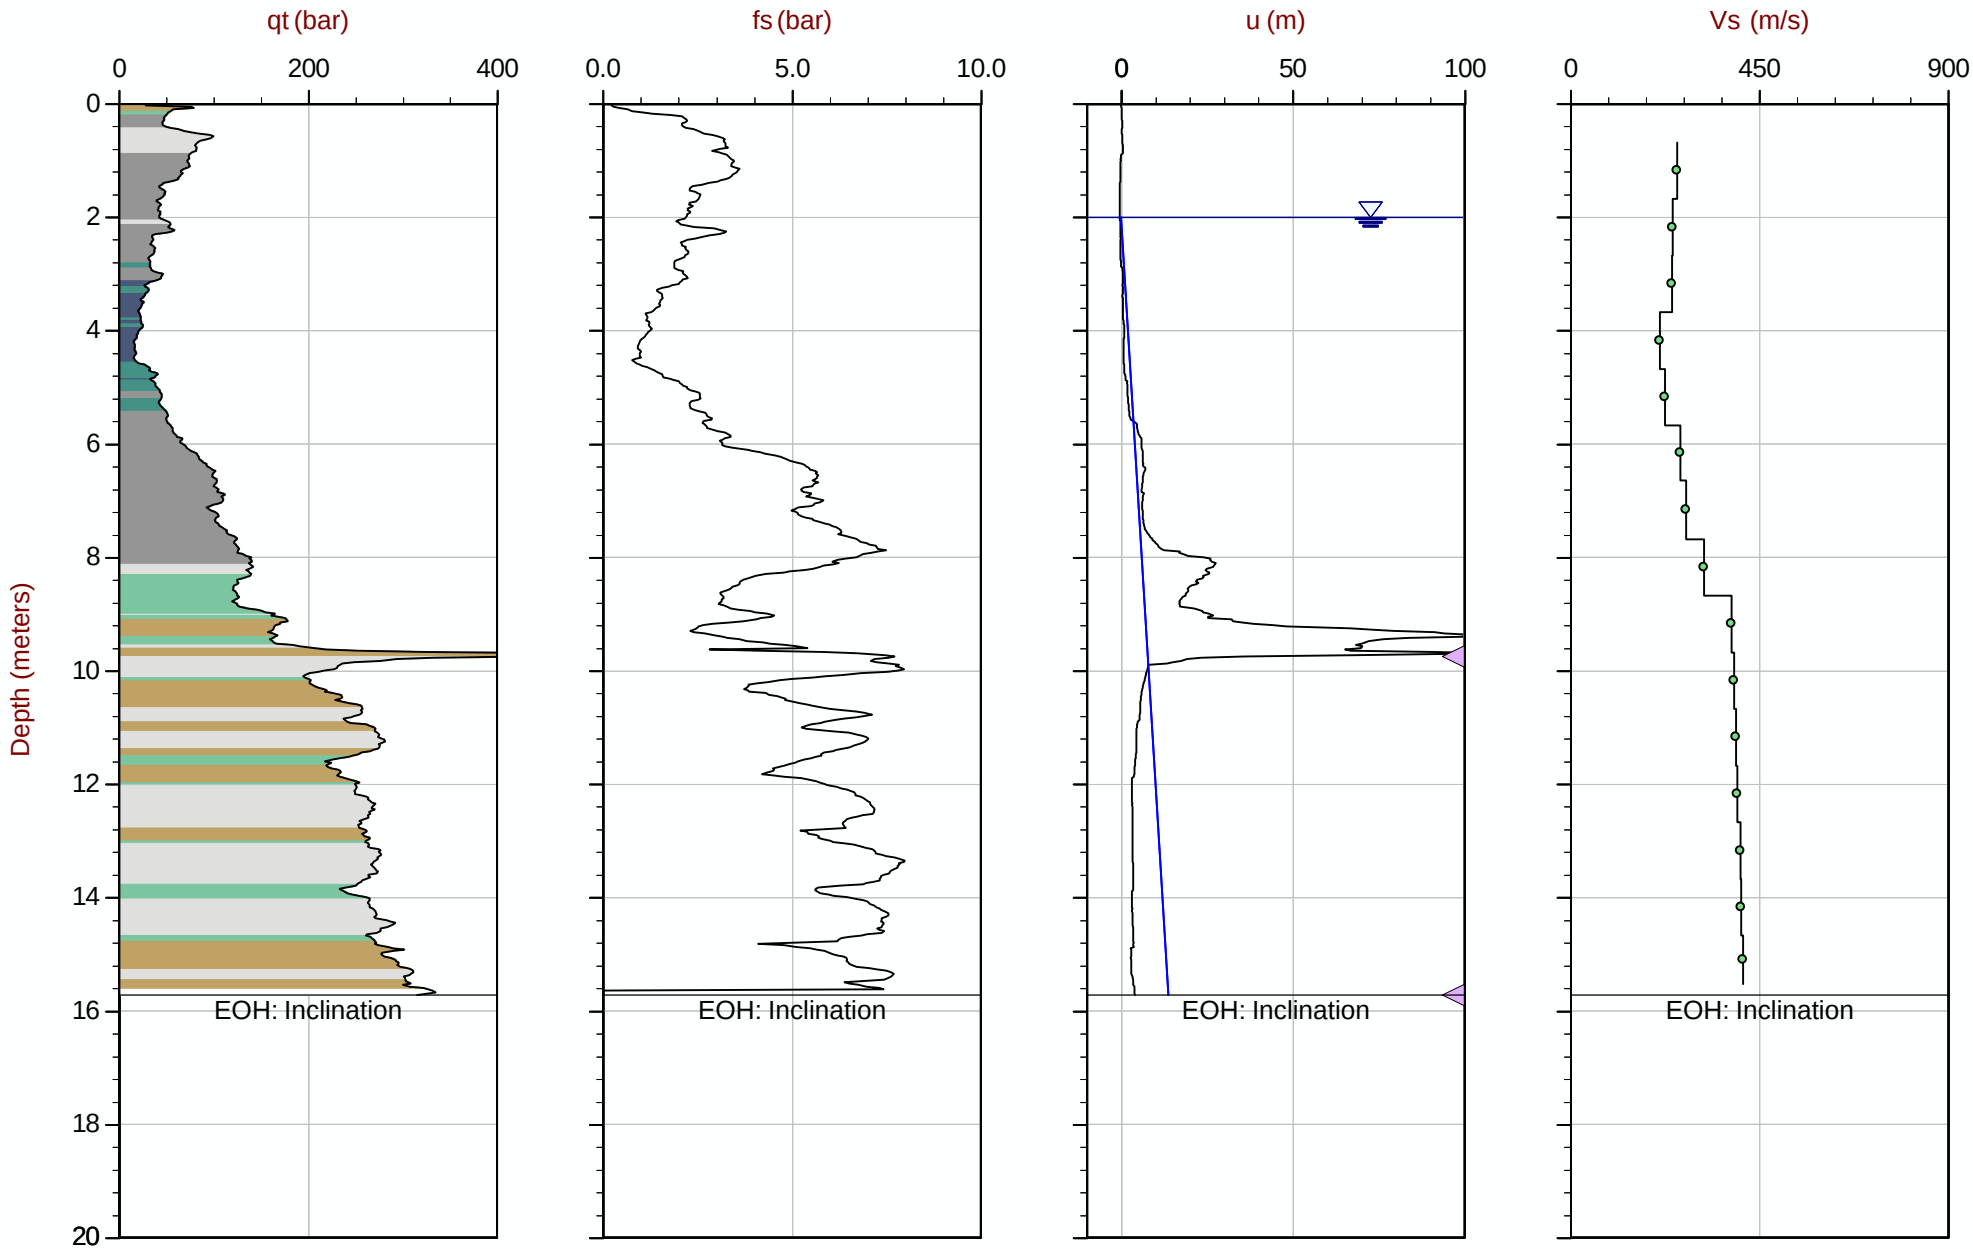

Max Depth: 15.725 m / 51.59 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT100.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612602m E: 413774m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-19 15:27
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT103
Cone: 651:T1500F15U35 Area= 15cm2

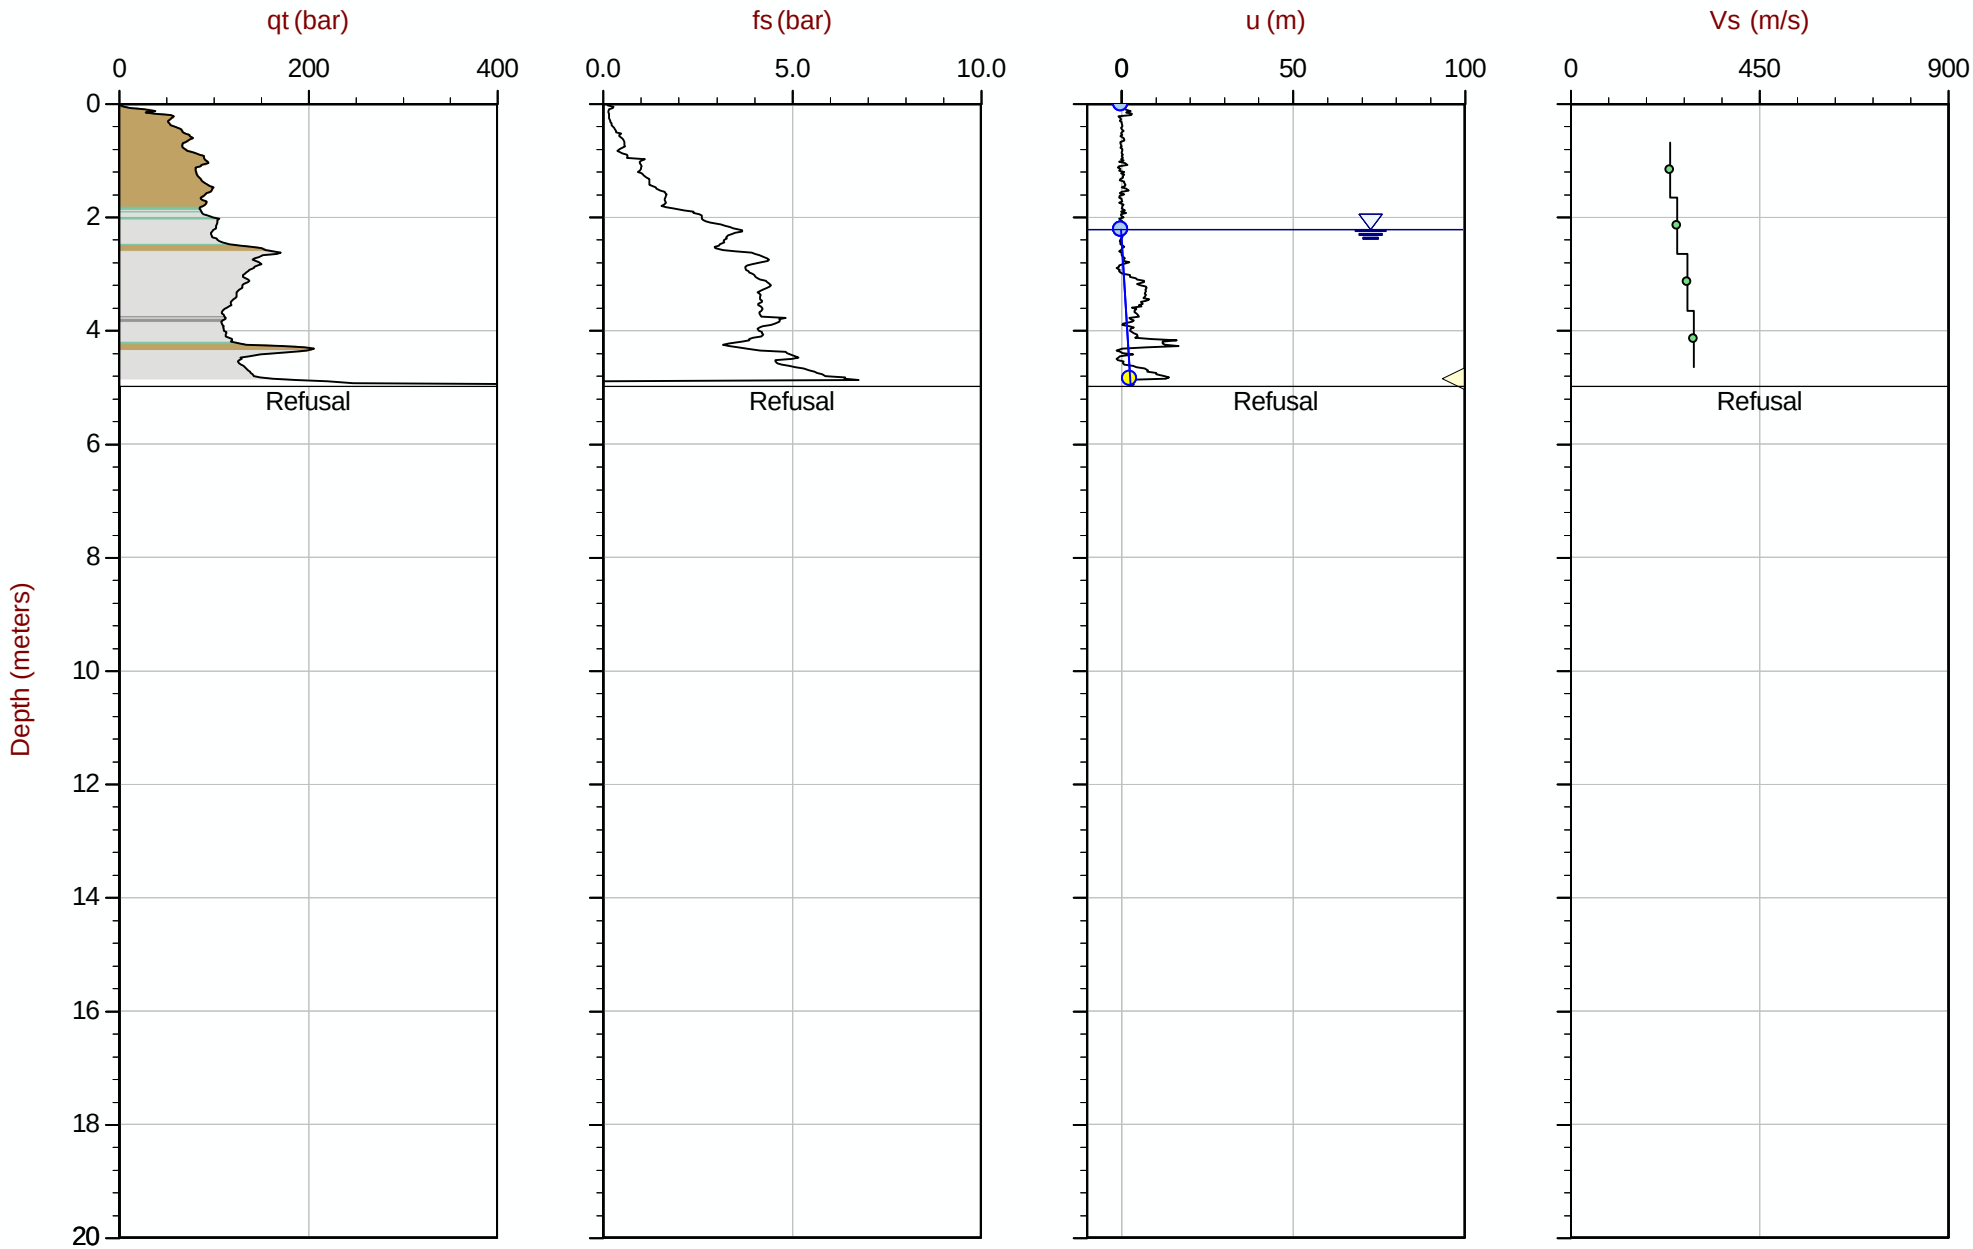

Max Depth: 4.975 m / 16.32 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT103.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612598m E: 414069m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-20 11:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT106
Cone: 651:T1500F15U35 Area= 15cm2

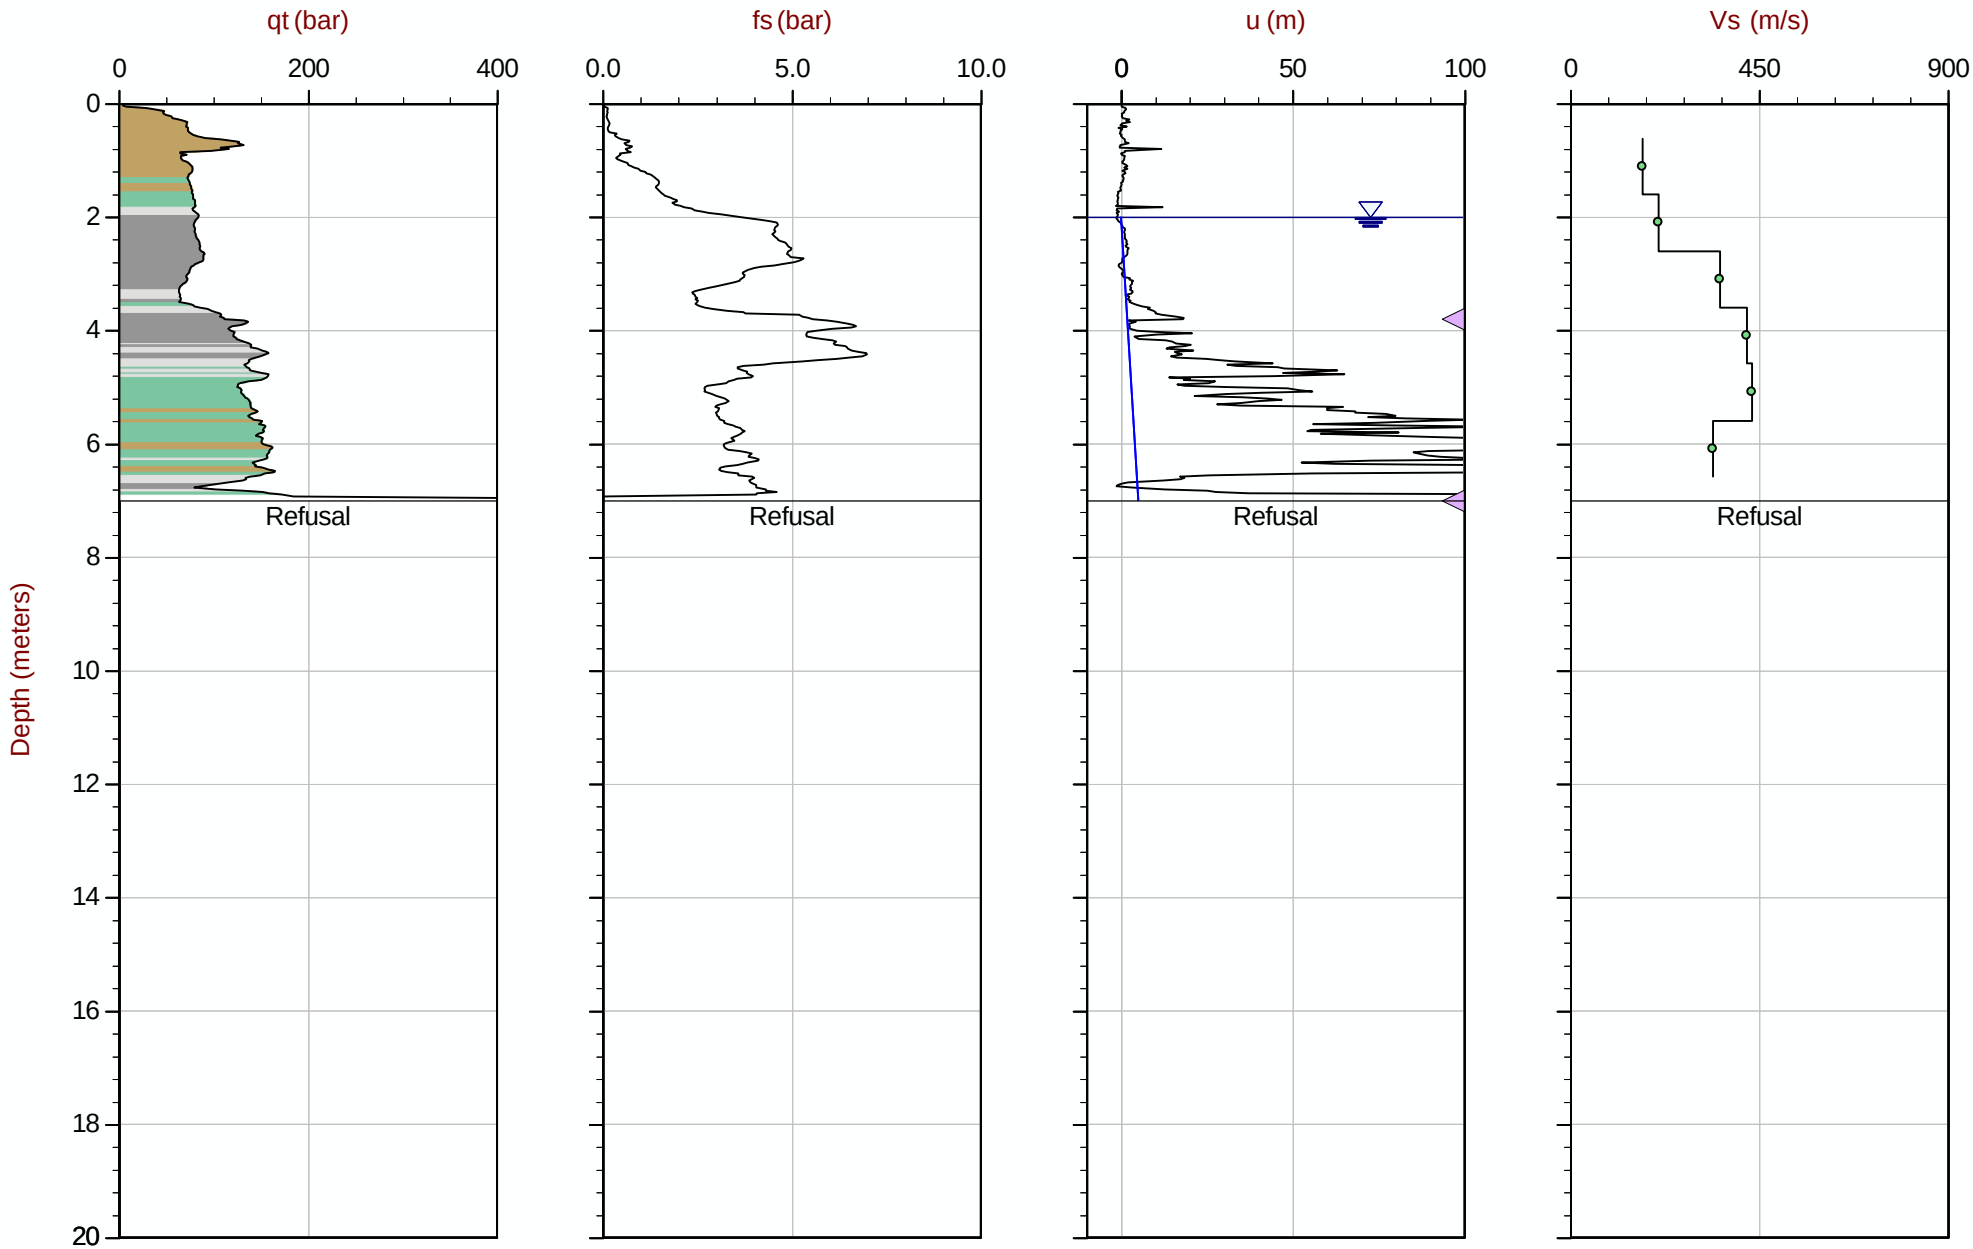

Max Depth: 7.000 m / 22.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT106.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612599m E: 414321m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 08:46
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT109
Cone: 750:T1500F15U35 Area= 15cm2

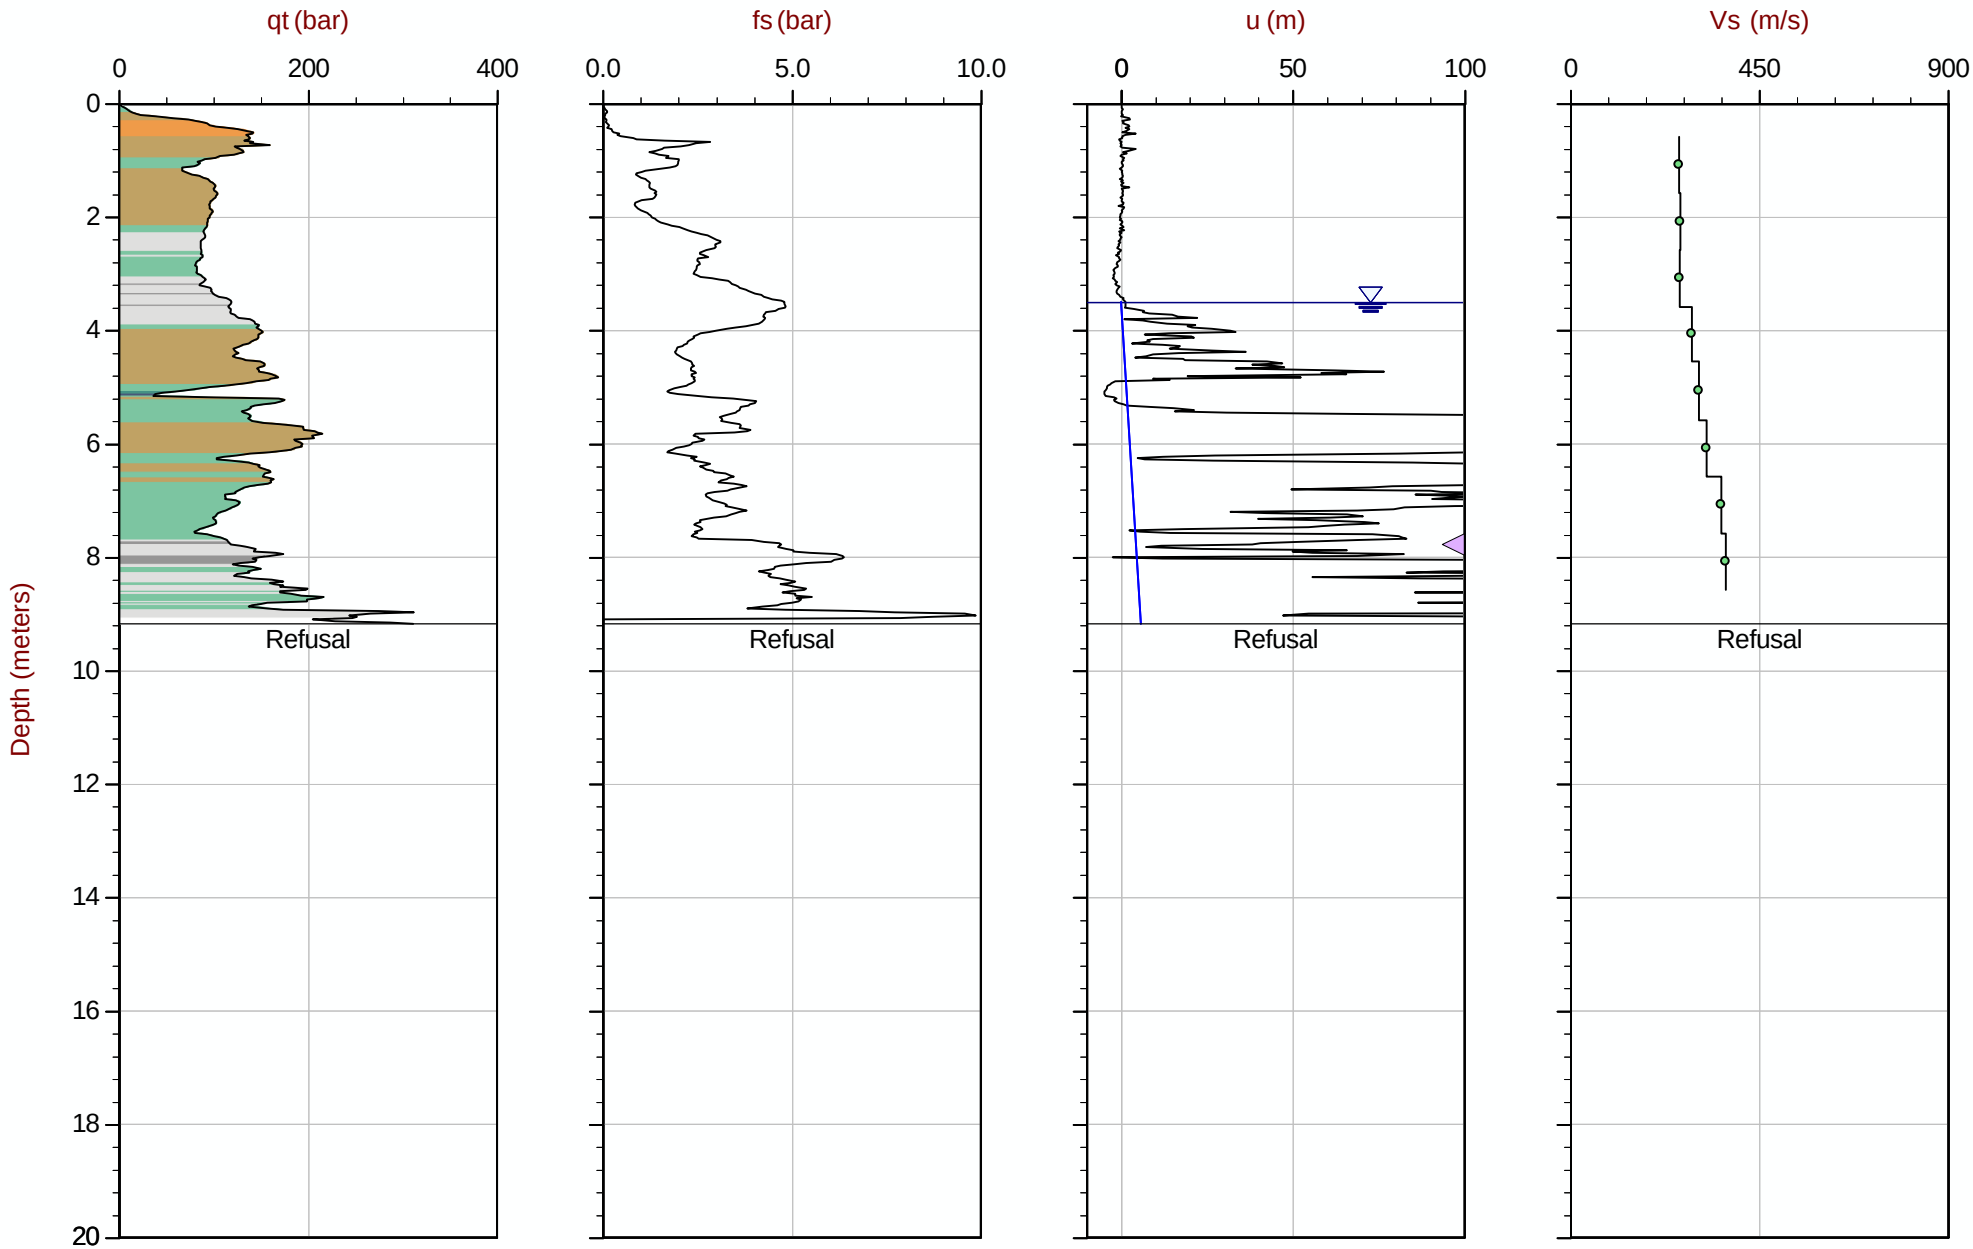

Max Depth: 9.175 m / 30.10 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT109.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612596m E: 414569m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-21 11:55
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT112
Cone: 750:T1500F15U35 Area= 15cm2

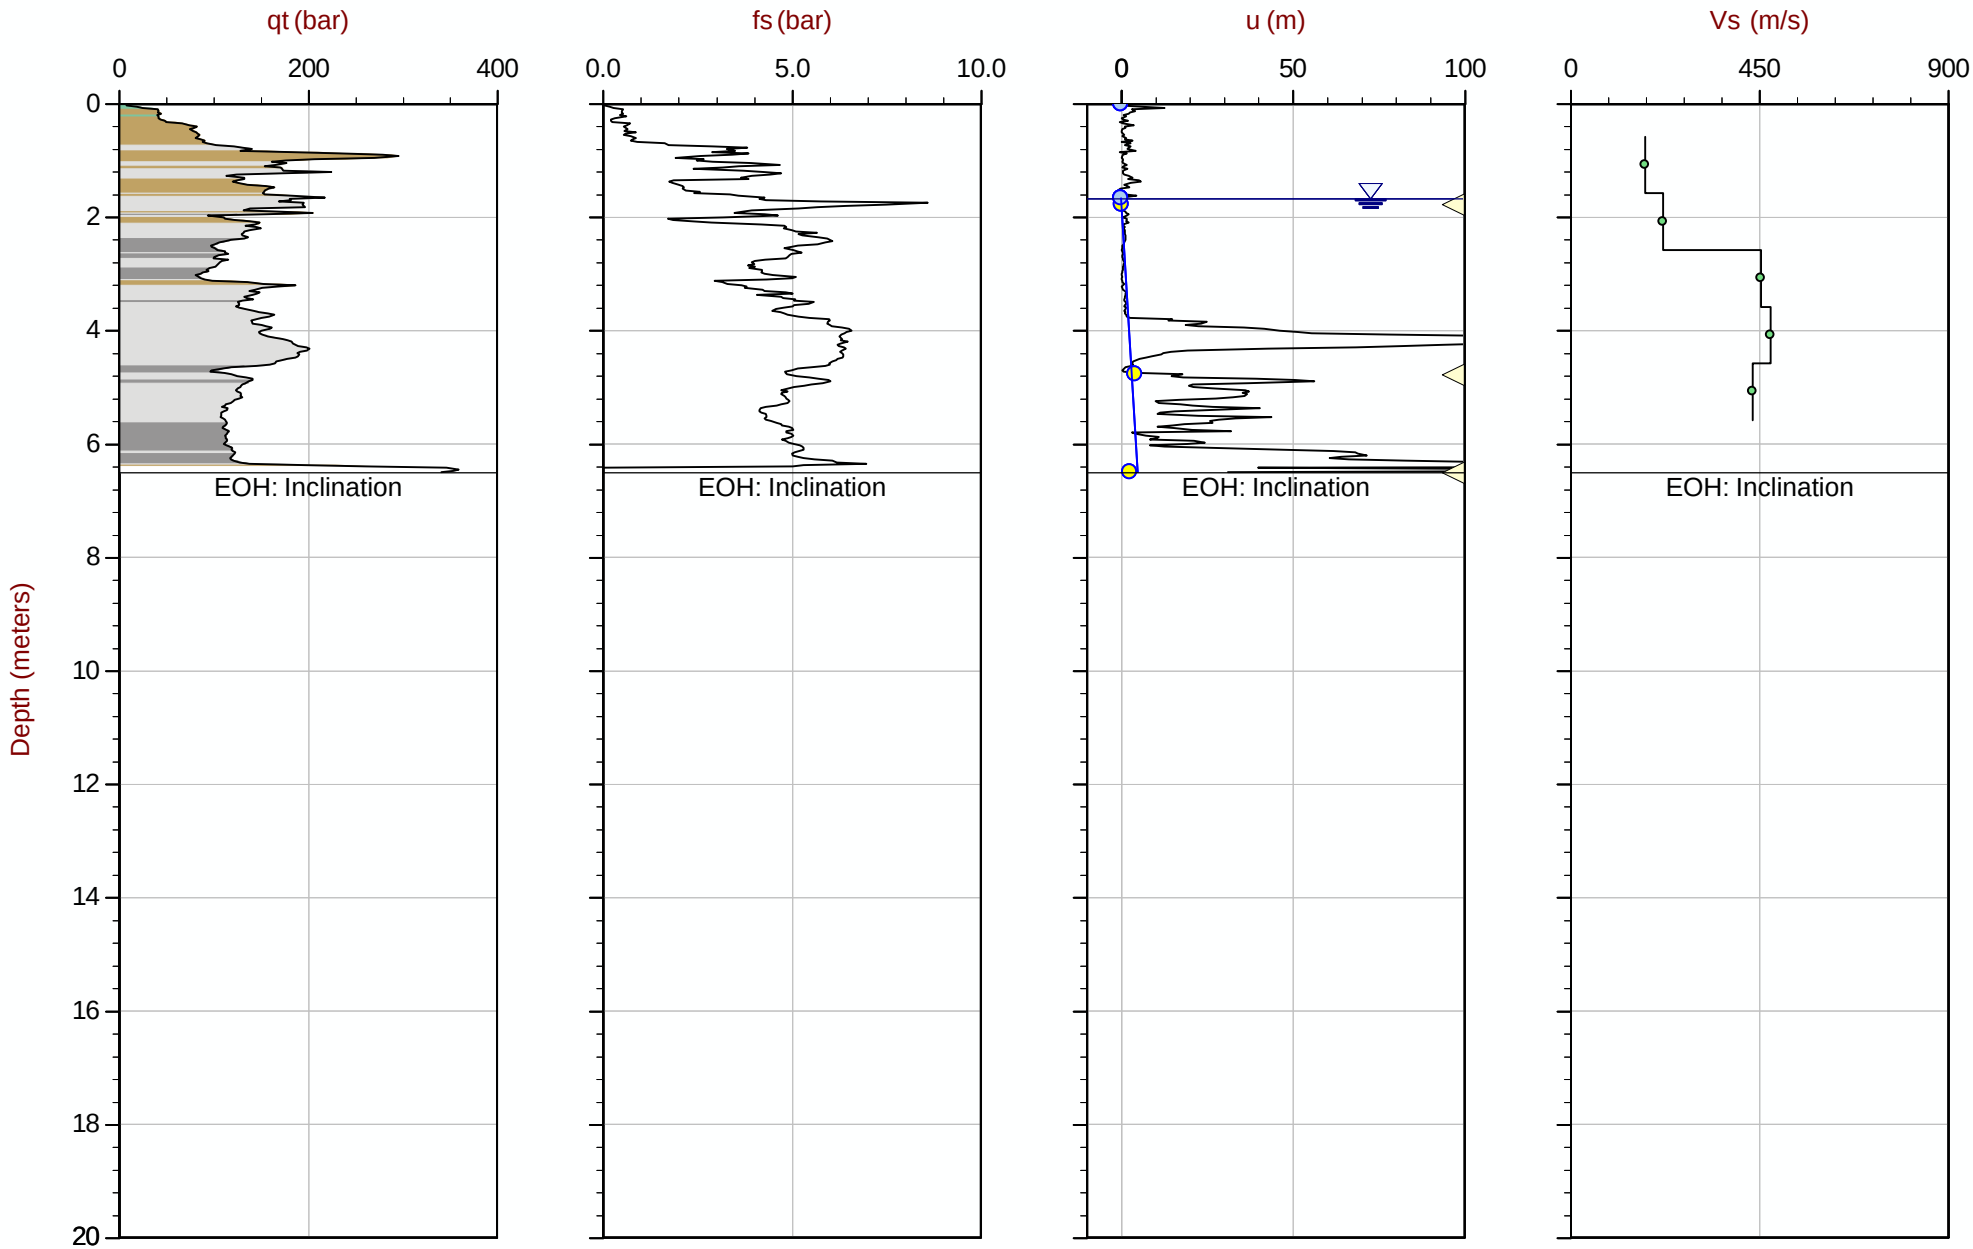

Max Depth: 6.500 m / 21.33 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT112.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612592m E: 414871m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 07:30
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT115
Cone: 822:T1000F10U35 Area= 15cm2

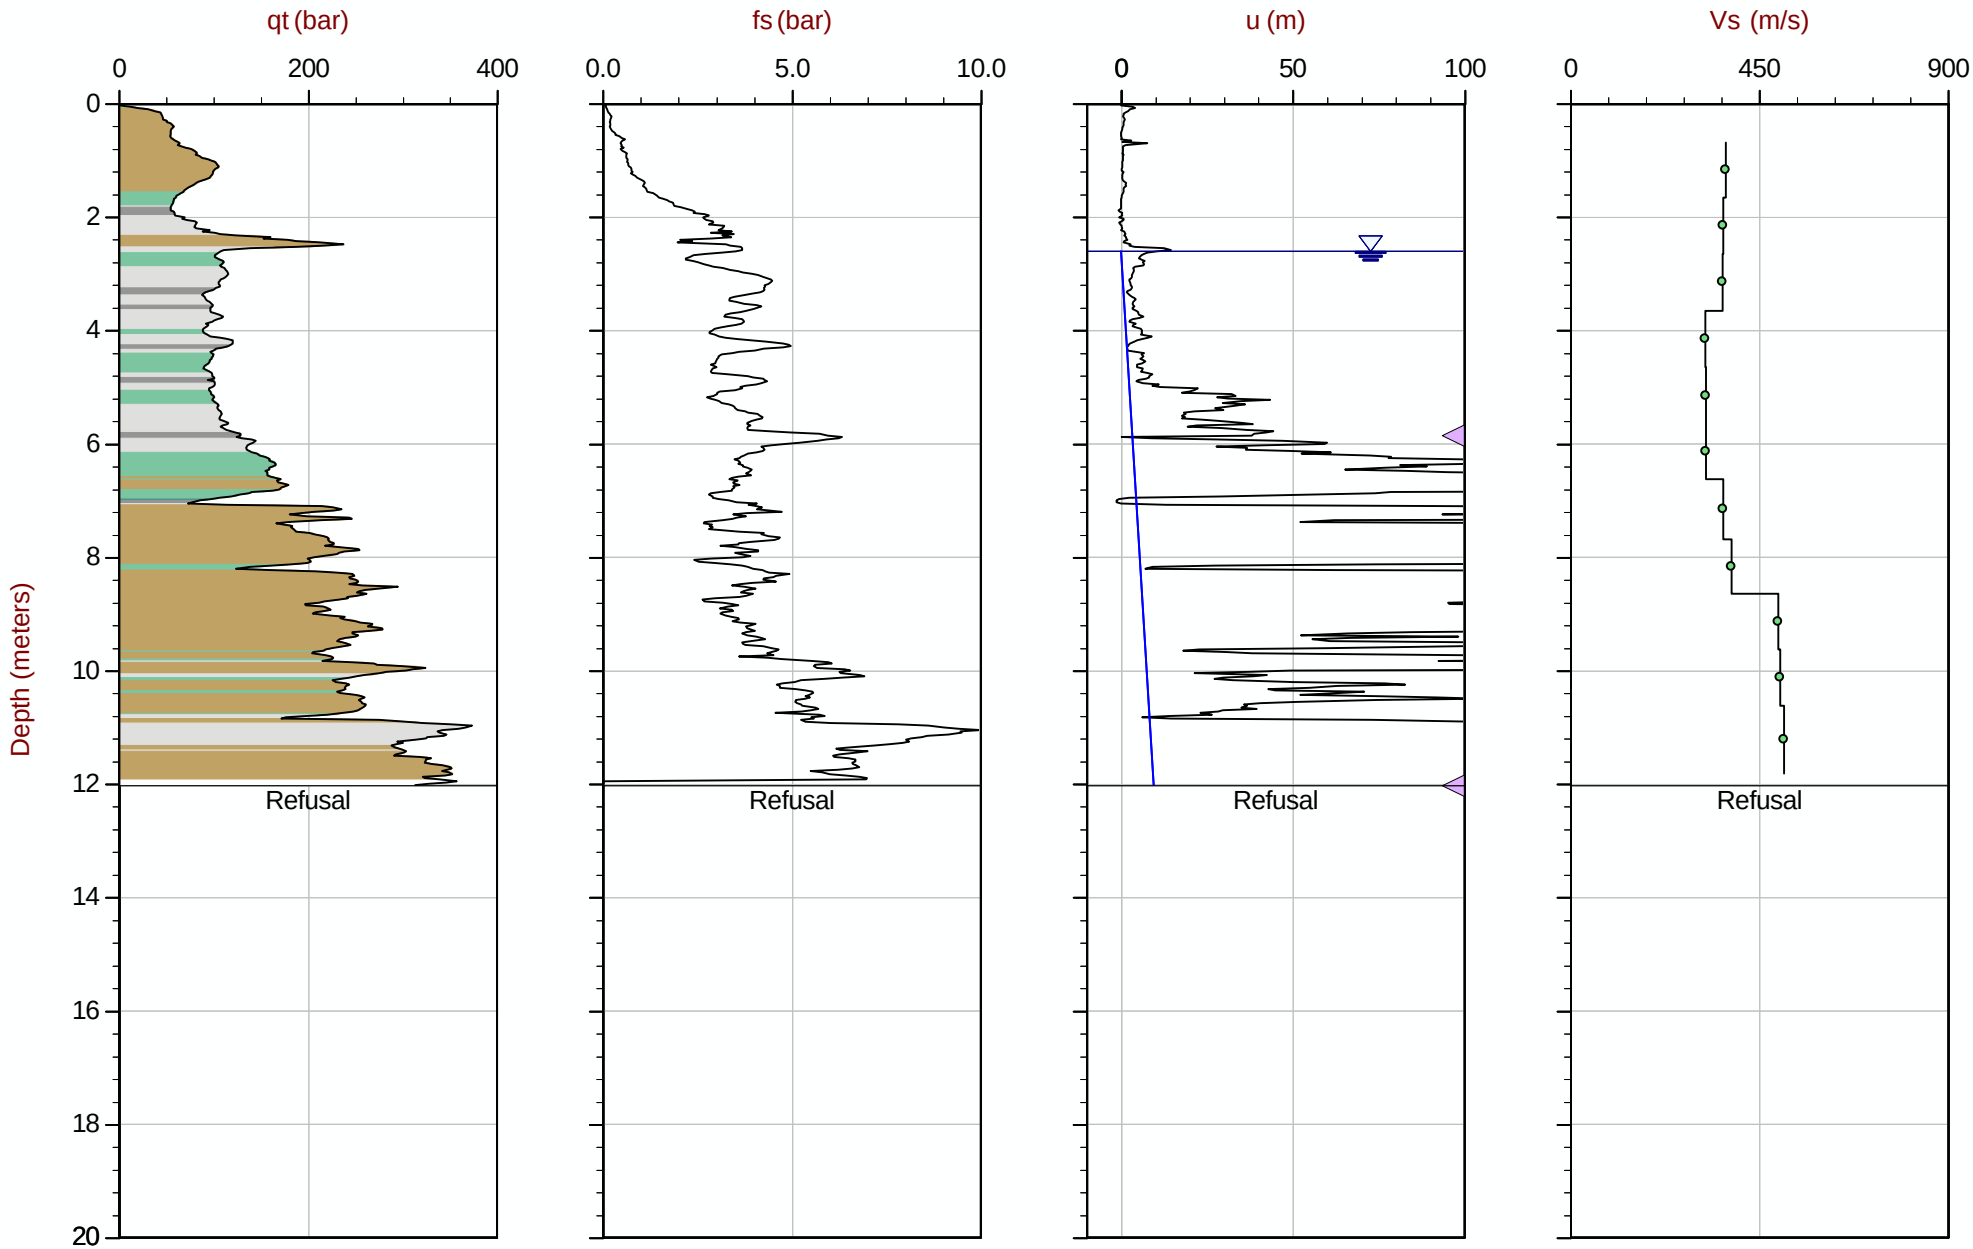

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT115.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612567m E: 415168m Elev: 776.263m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-22 15:53
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT121
Cone: 750:T1500F15U35 Area= 15cm2

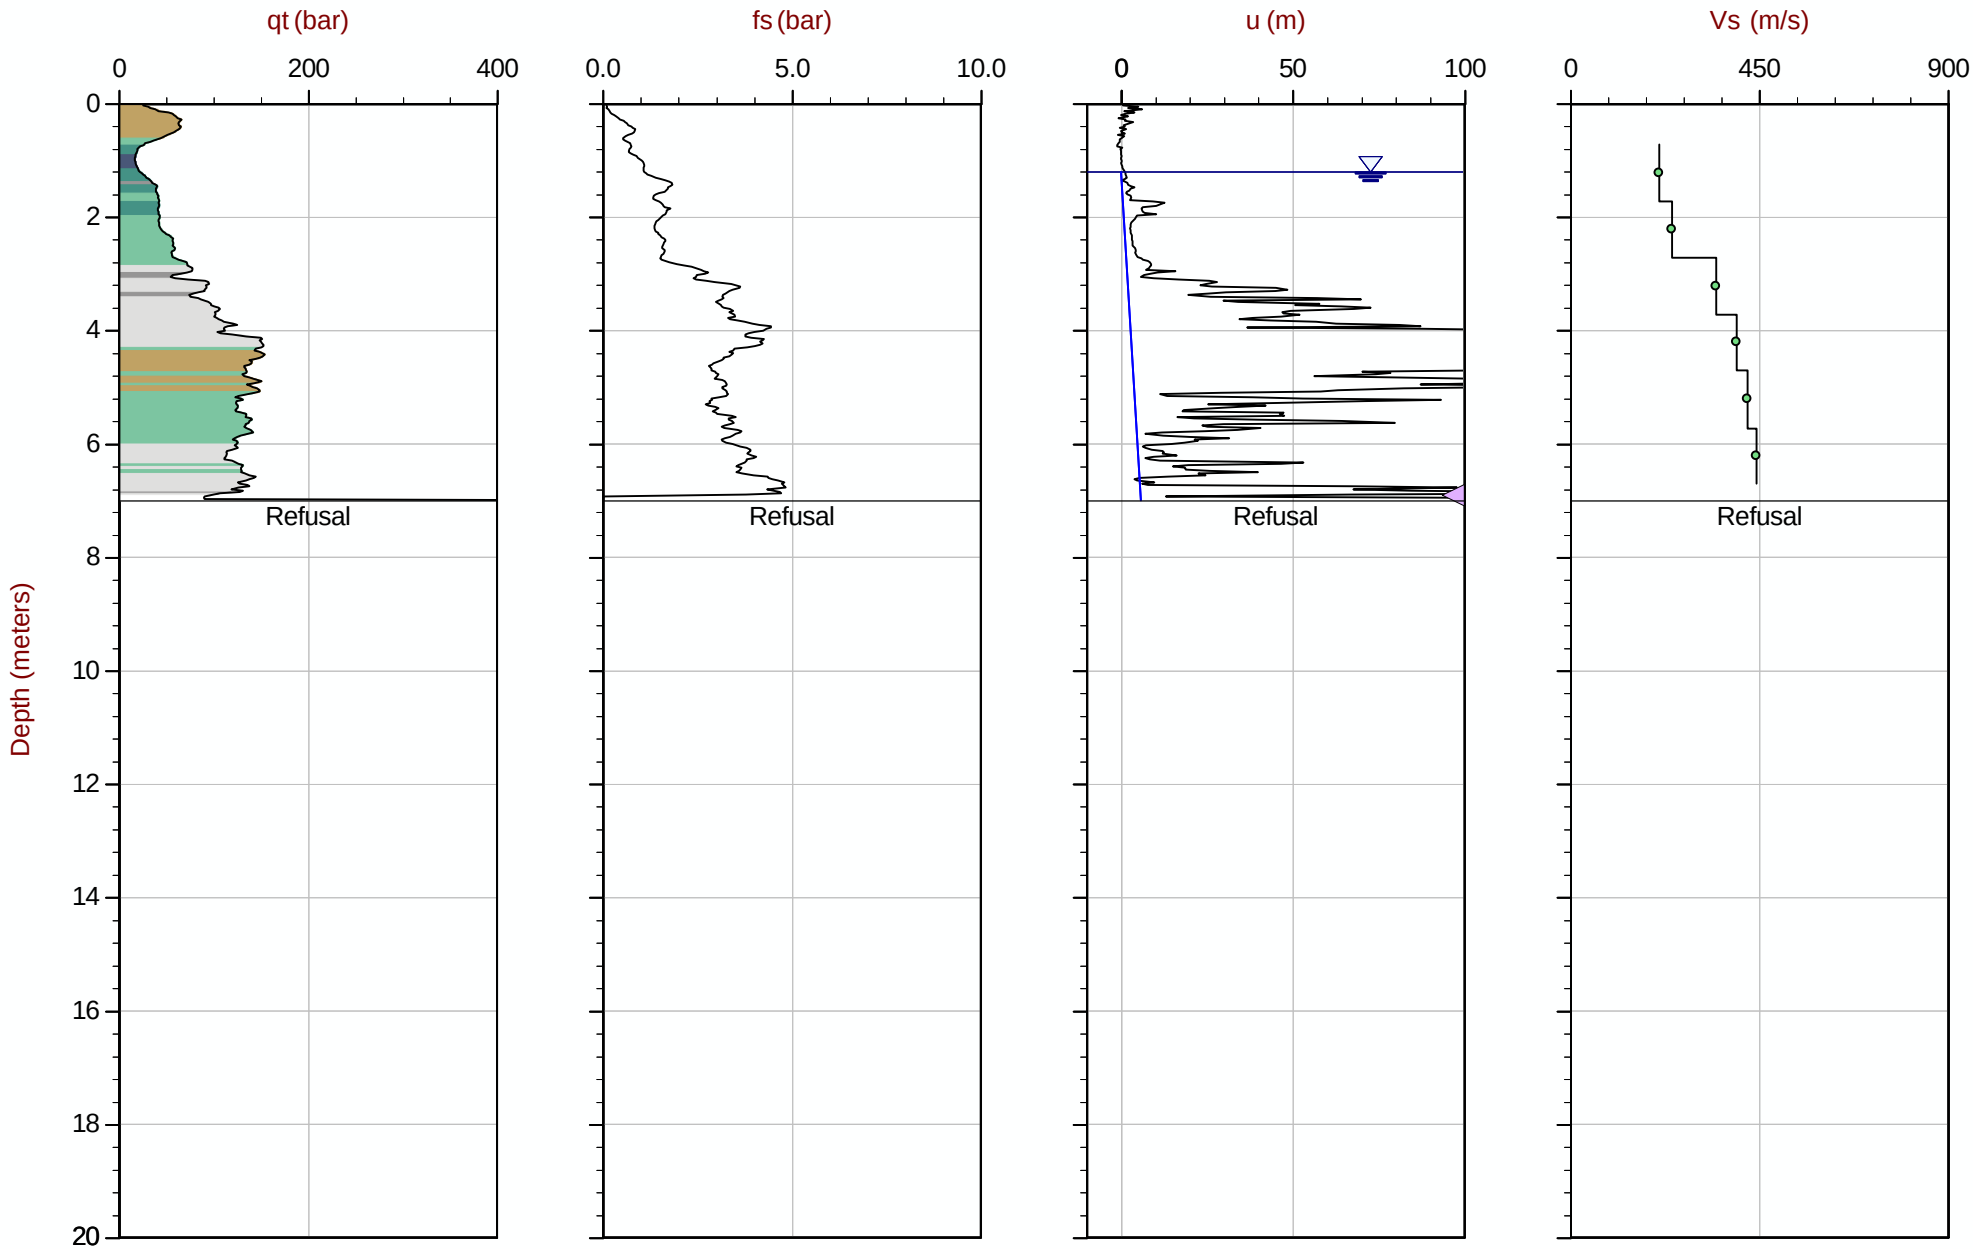

Max Depth: 7.000 m / 22.97 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT121.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612552m E: 415467m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-23 11:19
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT127
Cone: 750:T1500F15U35 Area= 15cm2

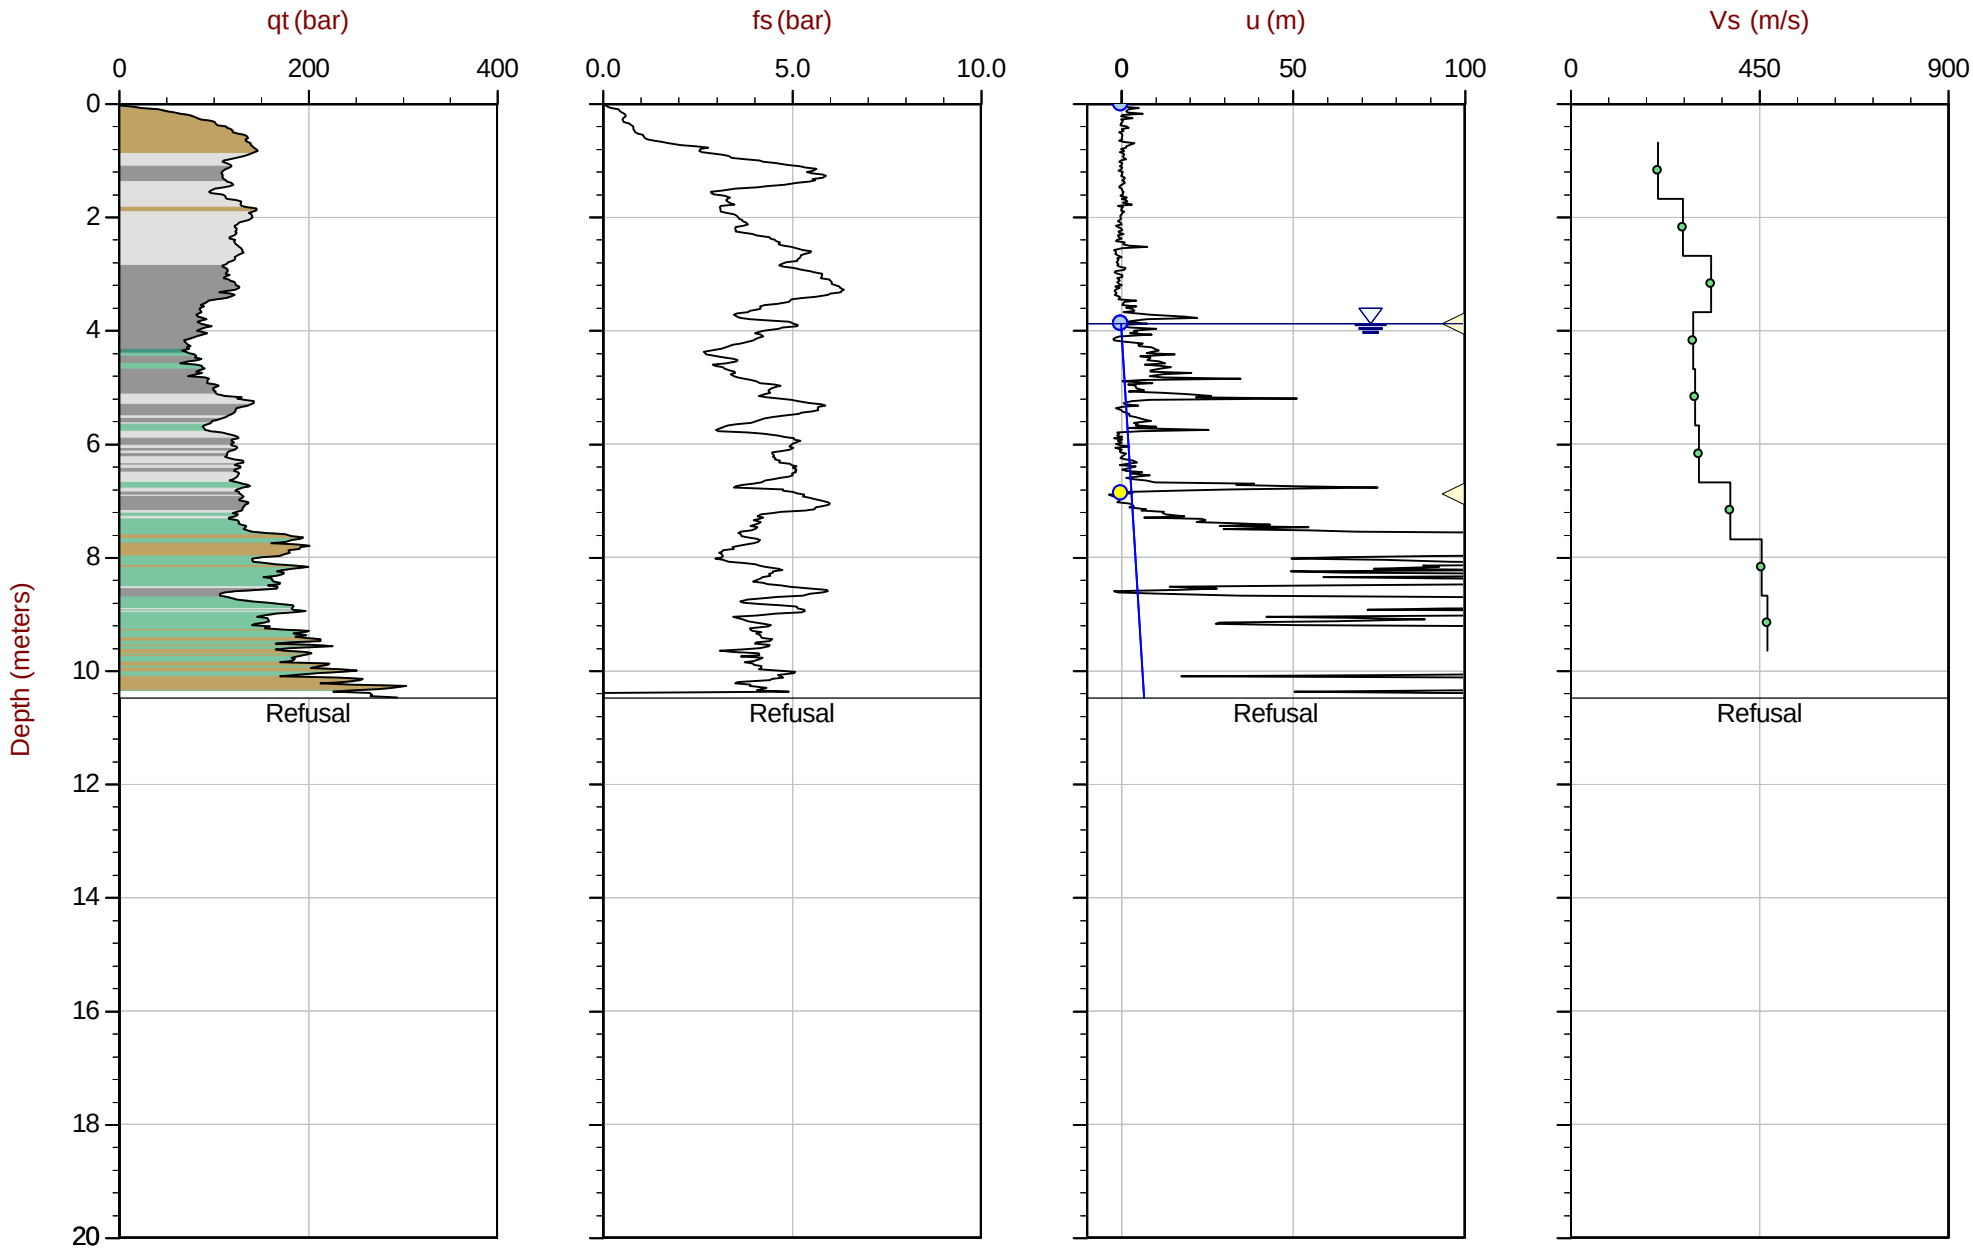

Max Depth: 10.475 m / 34.37 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT127.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612537m E: 415770m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 11:02
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131E
Cone: 822:T1000F10U35 Area= 15cm2

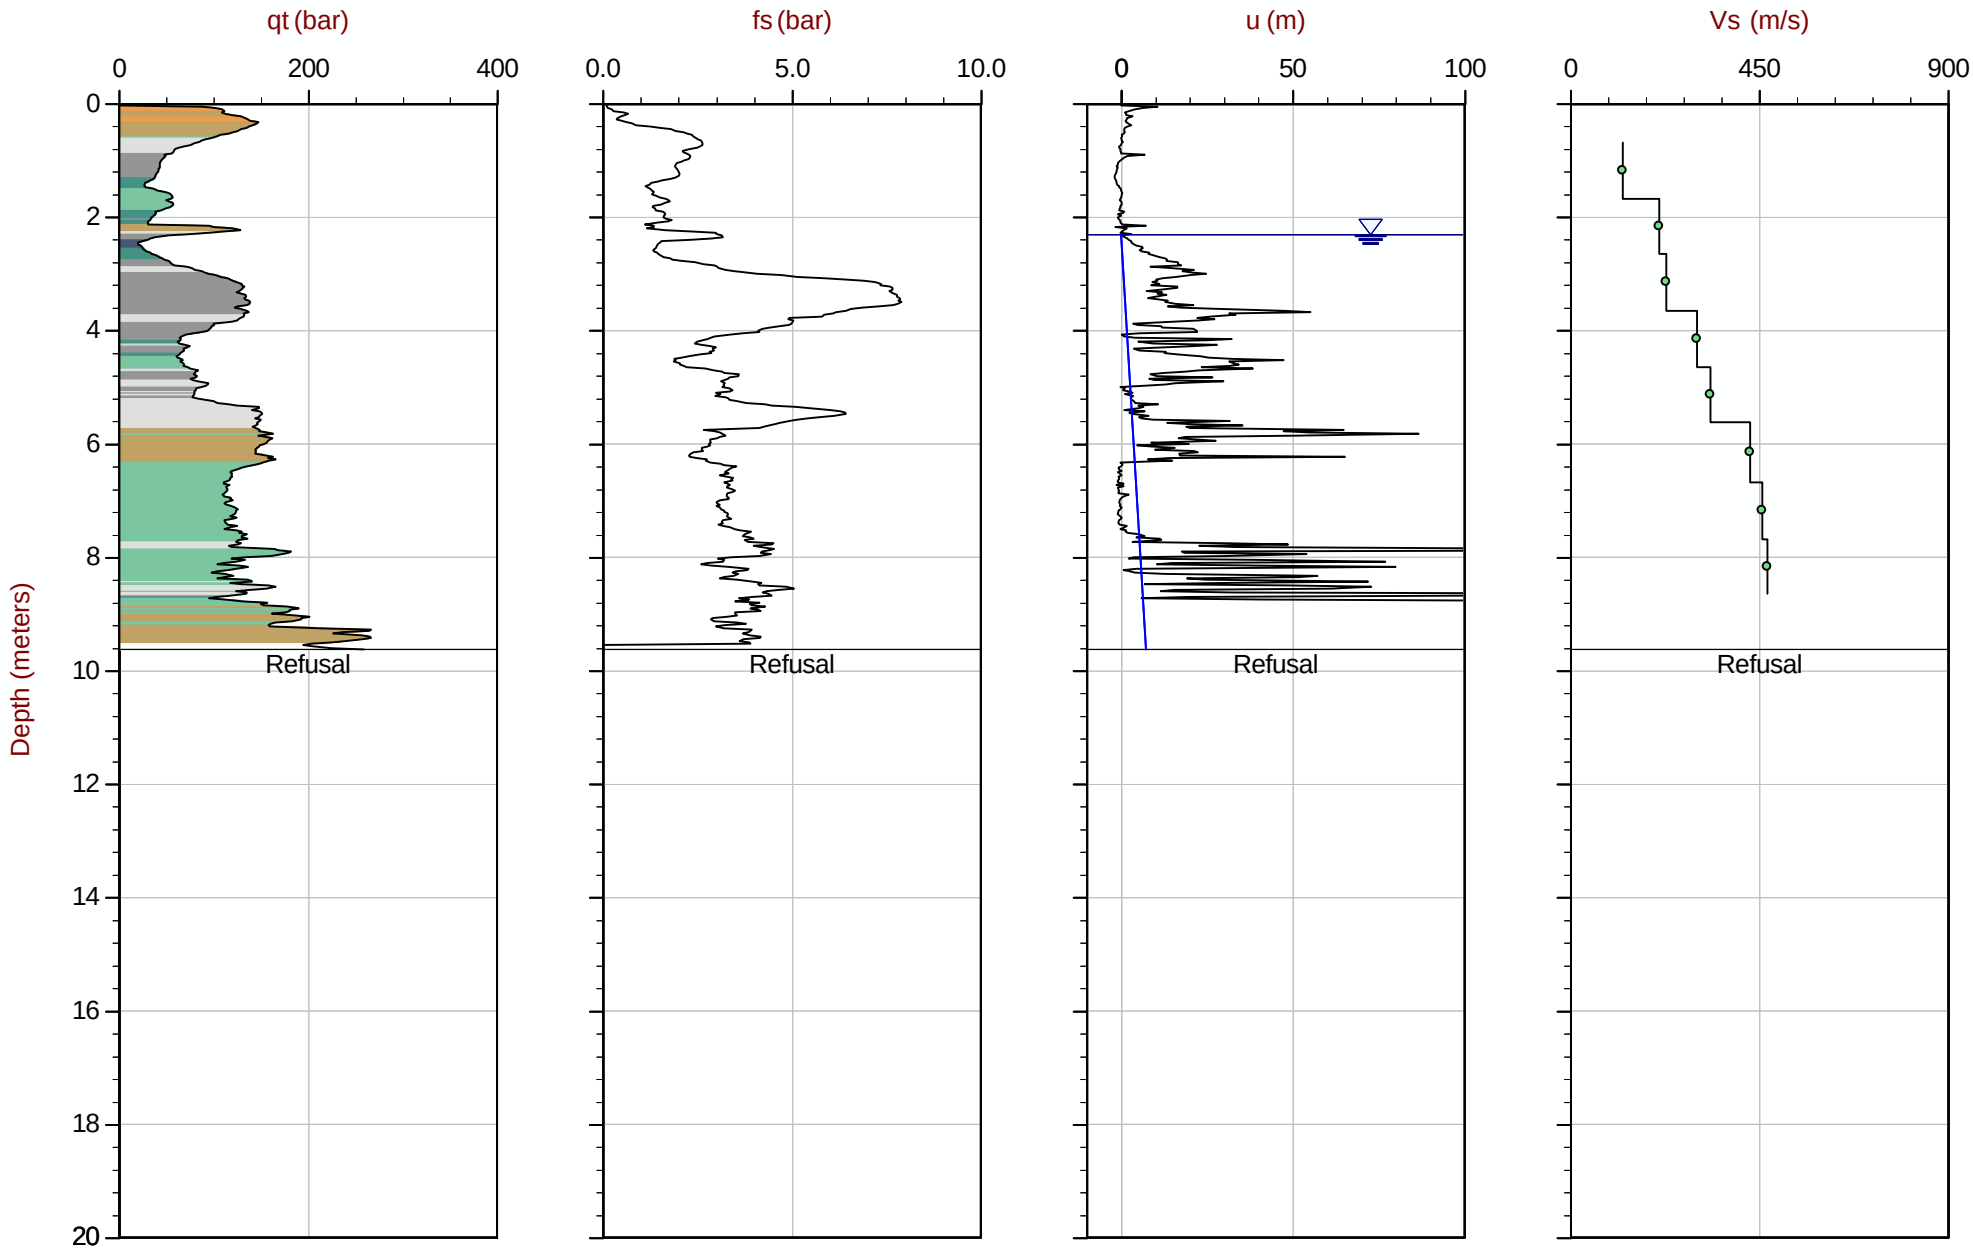

Max Depth: 9.625 m / 31.58 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131E.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612505m E: 416389m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 09:17
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131N
Cone: 822:T1000F10U35 Area= 15cm2

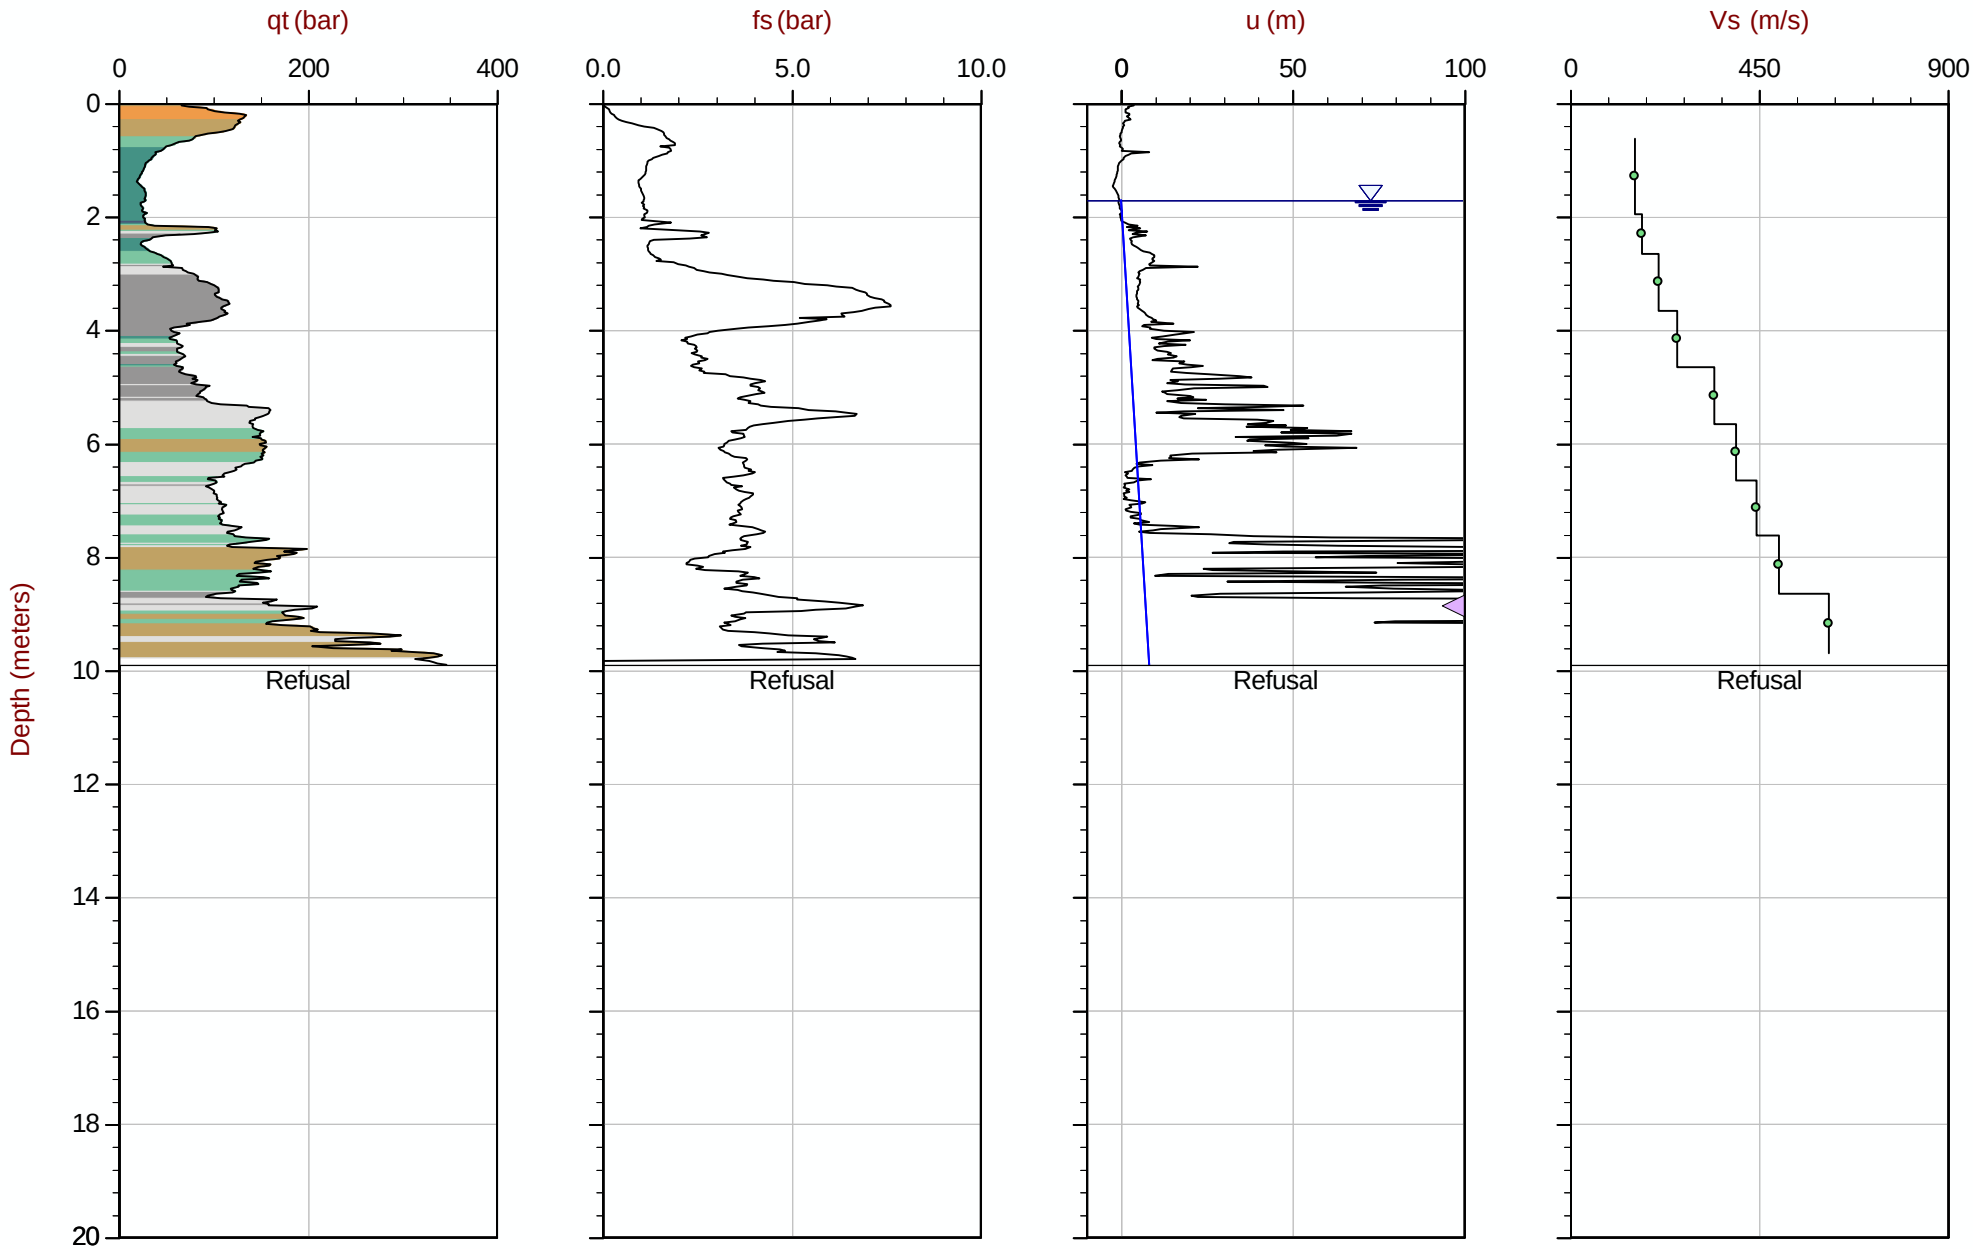

Max Depth: 9.900 m / 32.48 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131N.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612506m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 11:46
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131S1
Cone: 822:T1000F10U35 Area= 15cm2

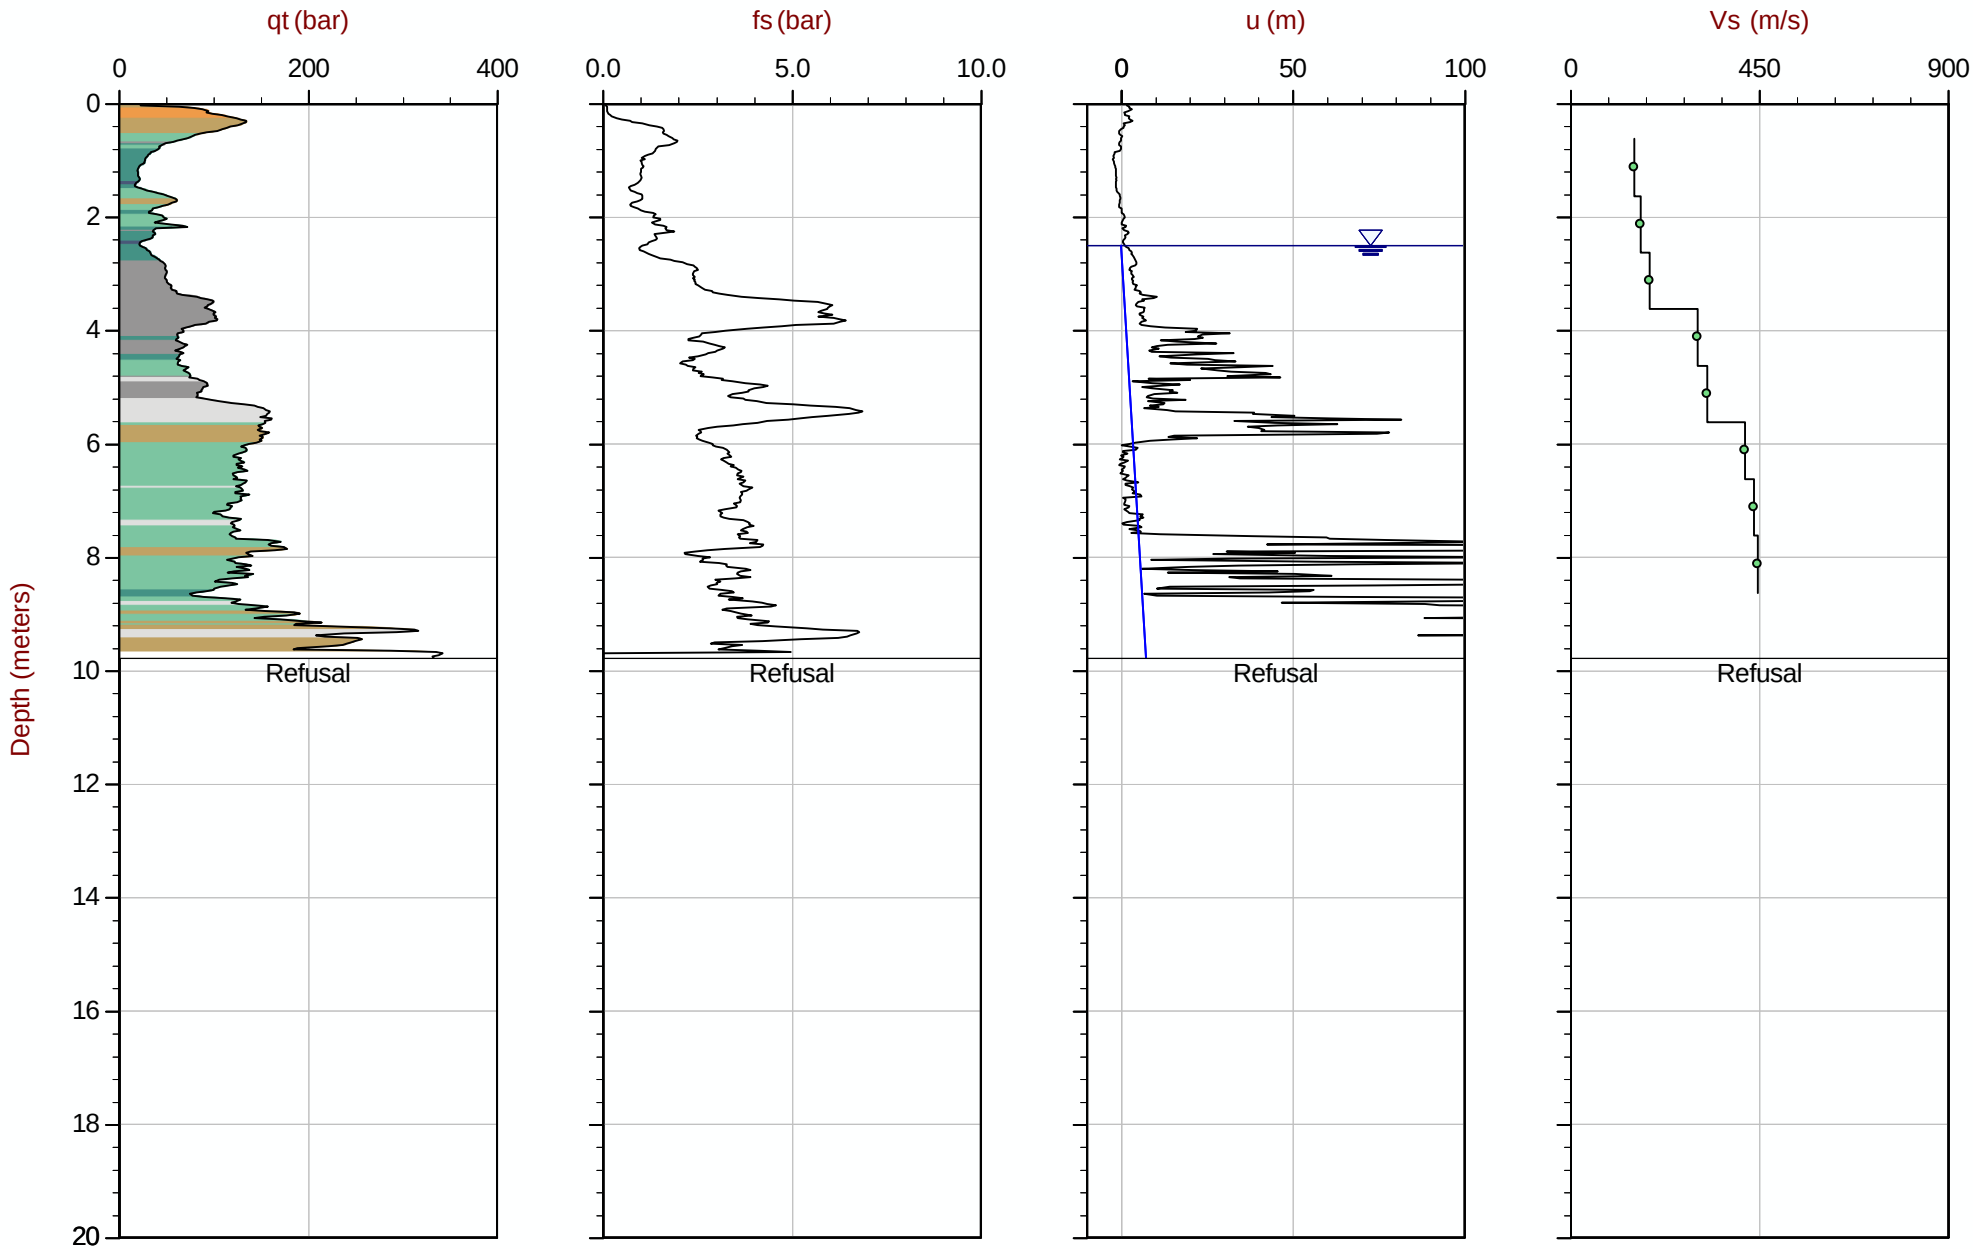

Max Depth: 9.775 m / 32.07 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131S1.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612504m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-15 10:23
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131S2
Cone: 822:T1000F10U35 Area= 15cm2

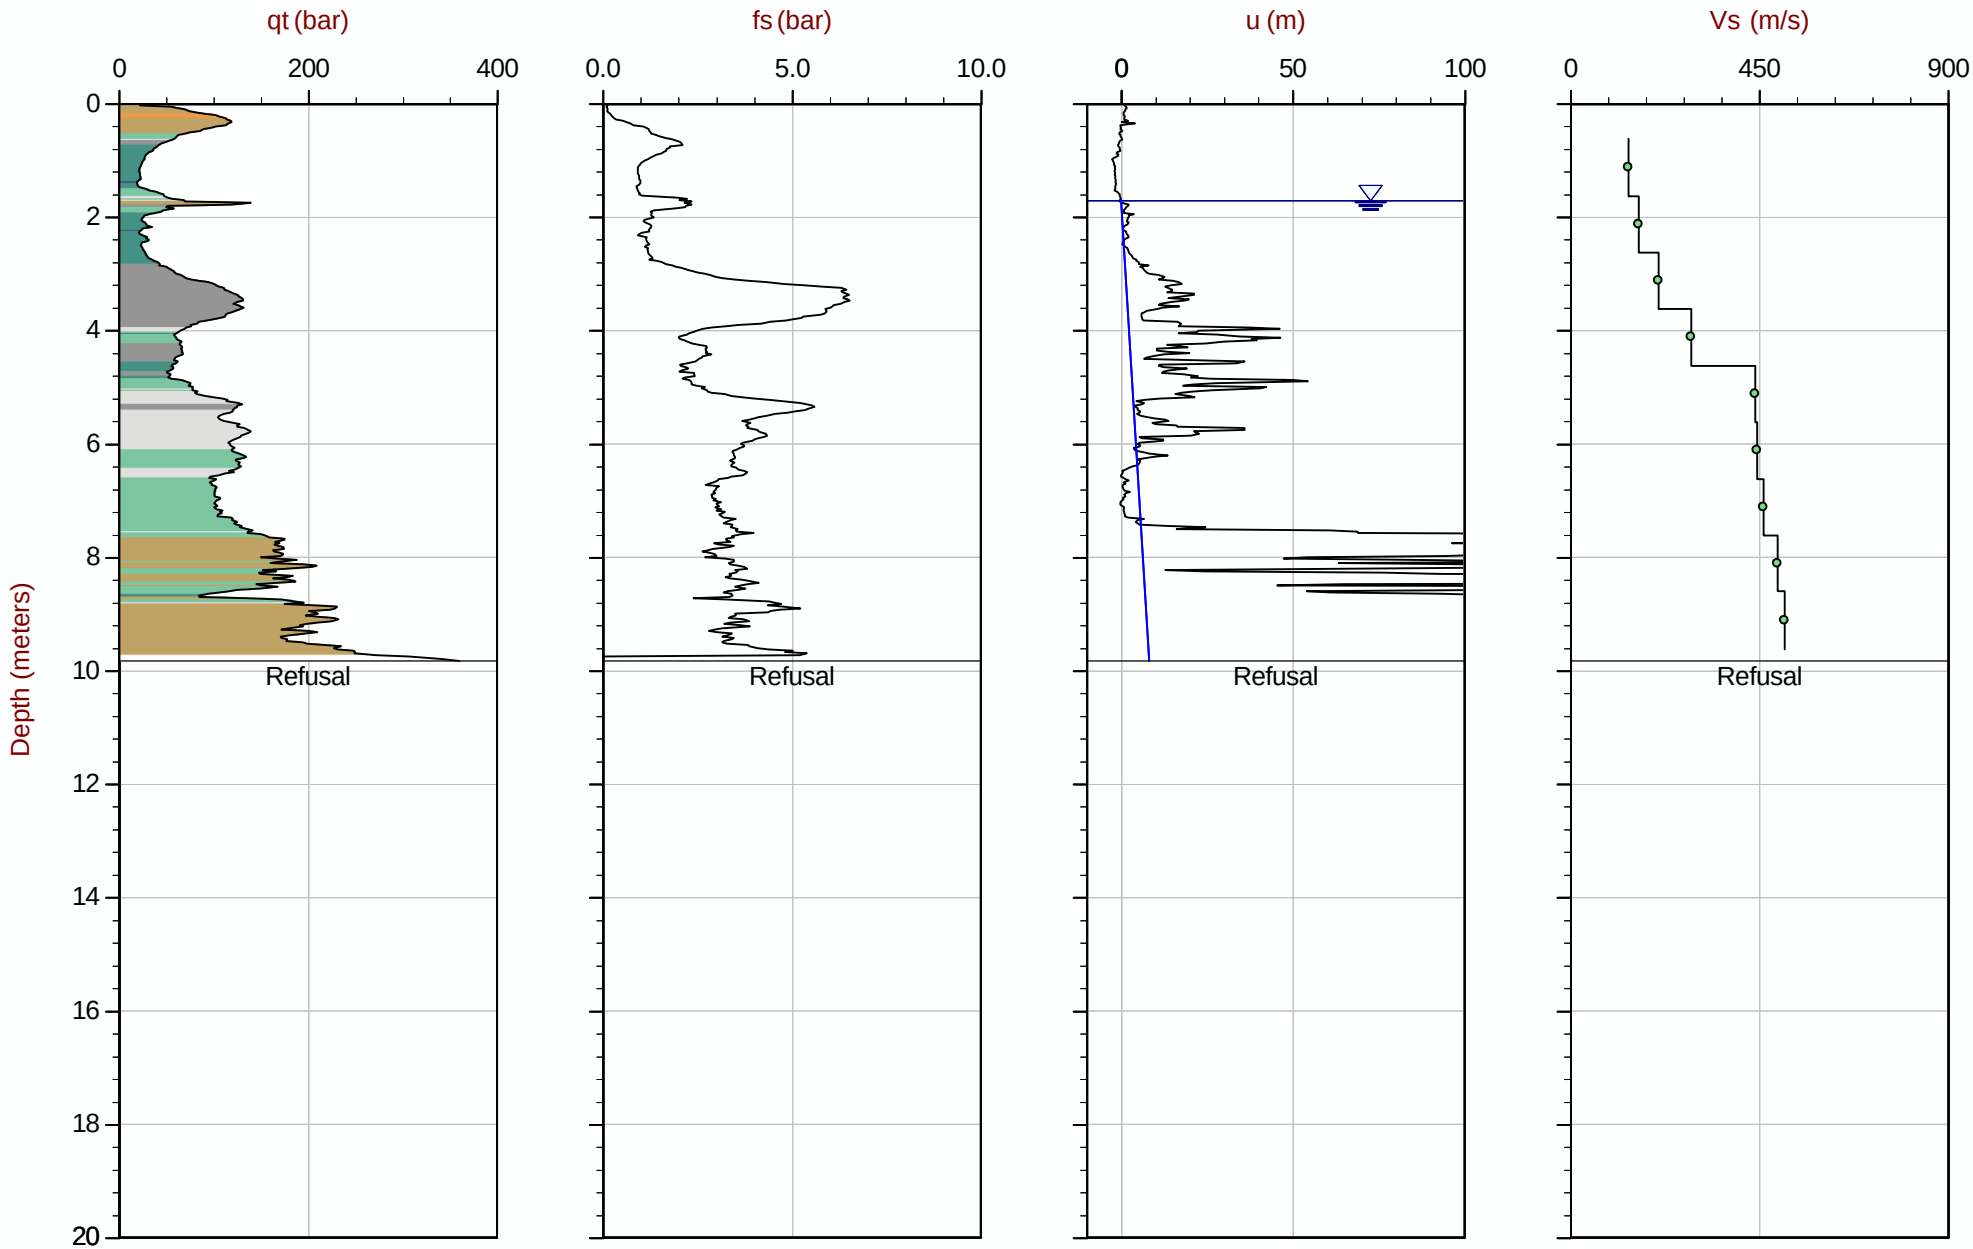

Max Depth: 9.825 m / 32.23 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT131S2.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612500m E: 416388m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 07:06
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT133
Cone: 750:T1500F15U35 Area= 15cm2

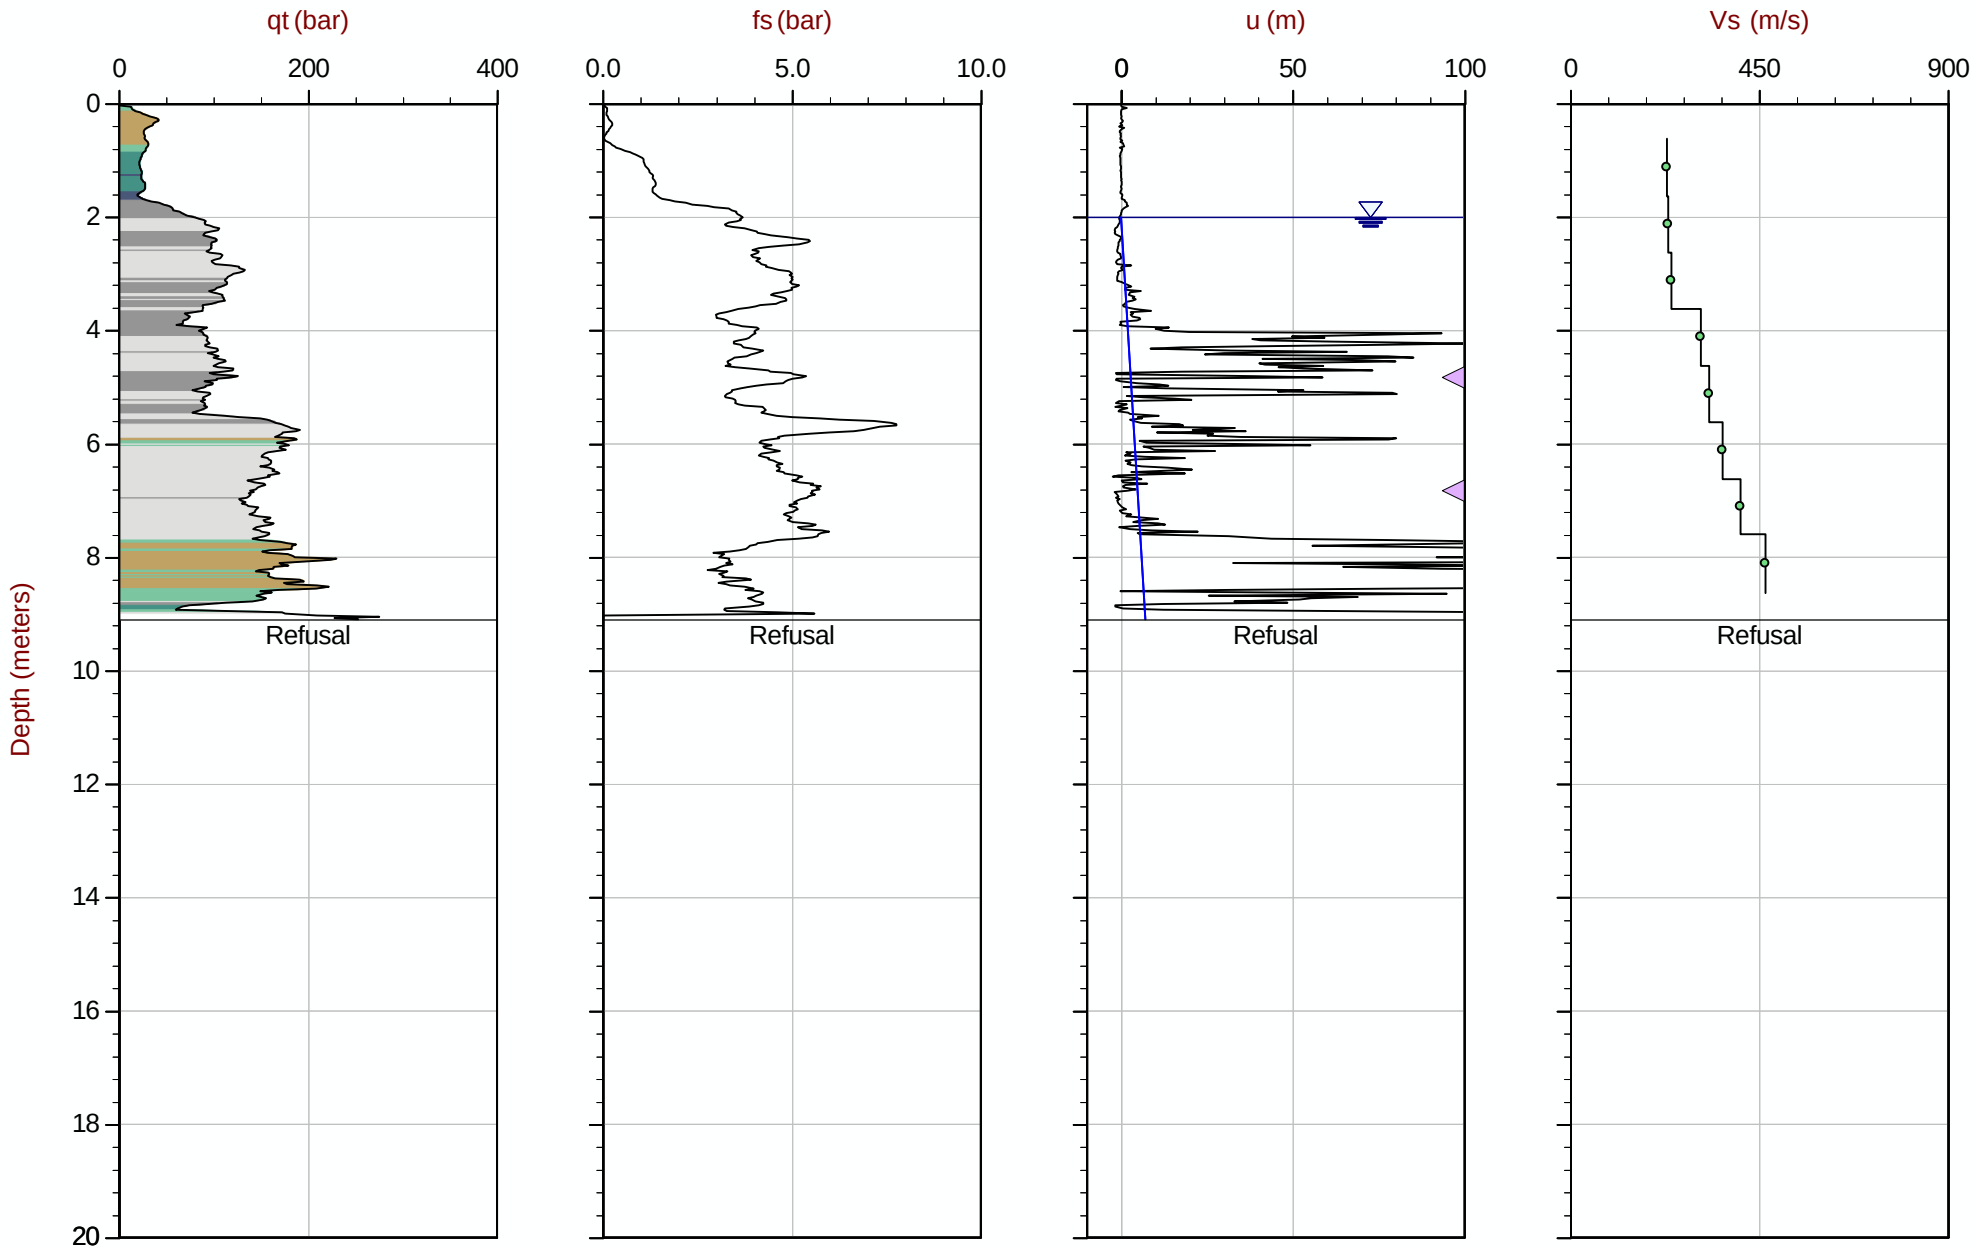

Max Depth: 9.100 m / 29.86 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT133.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612530m E: 416070m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-24 14:22
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT138
Cone: 854:T1500F15U35 Area= 15cm2

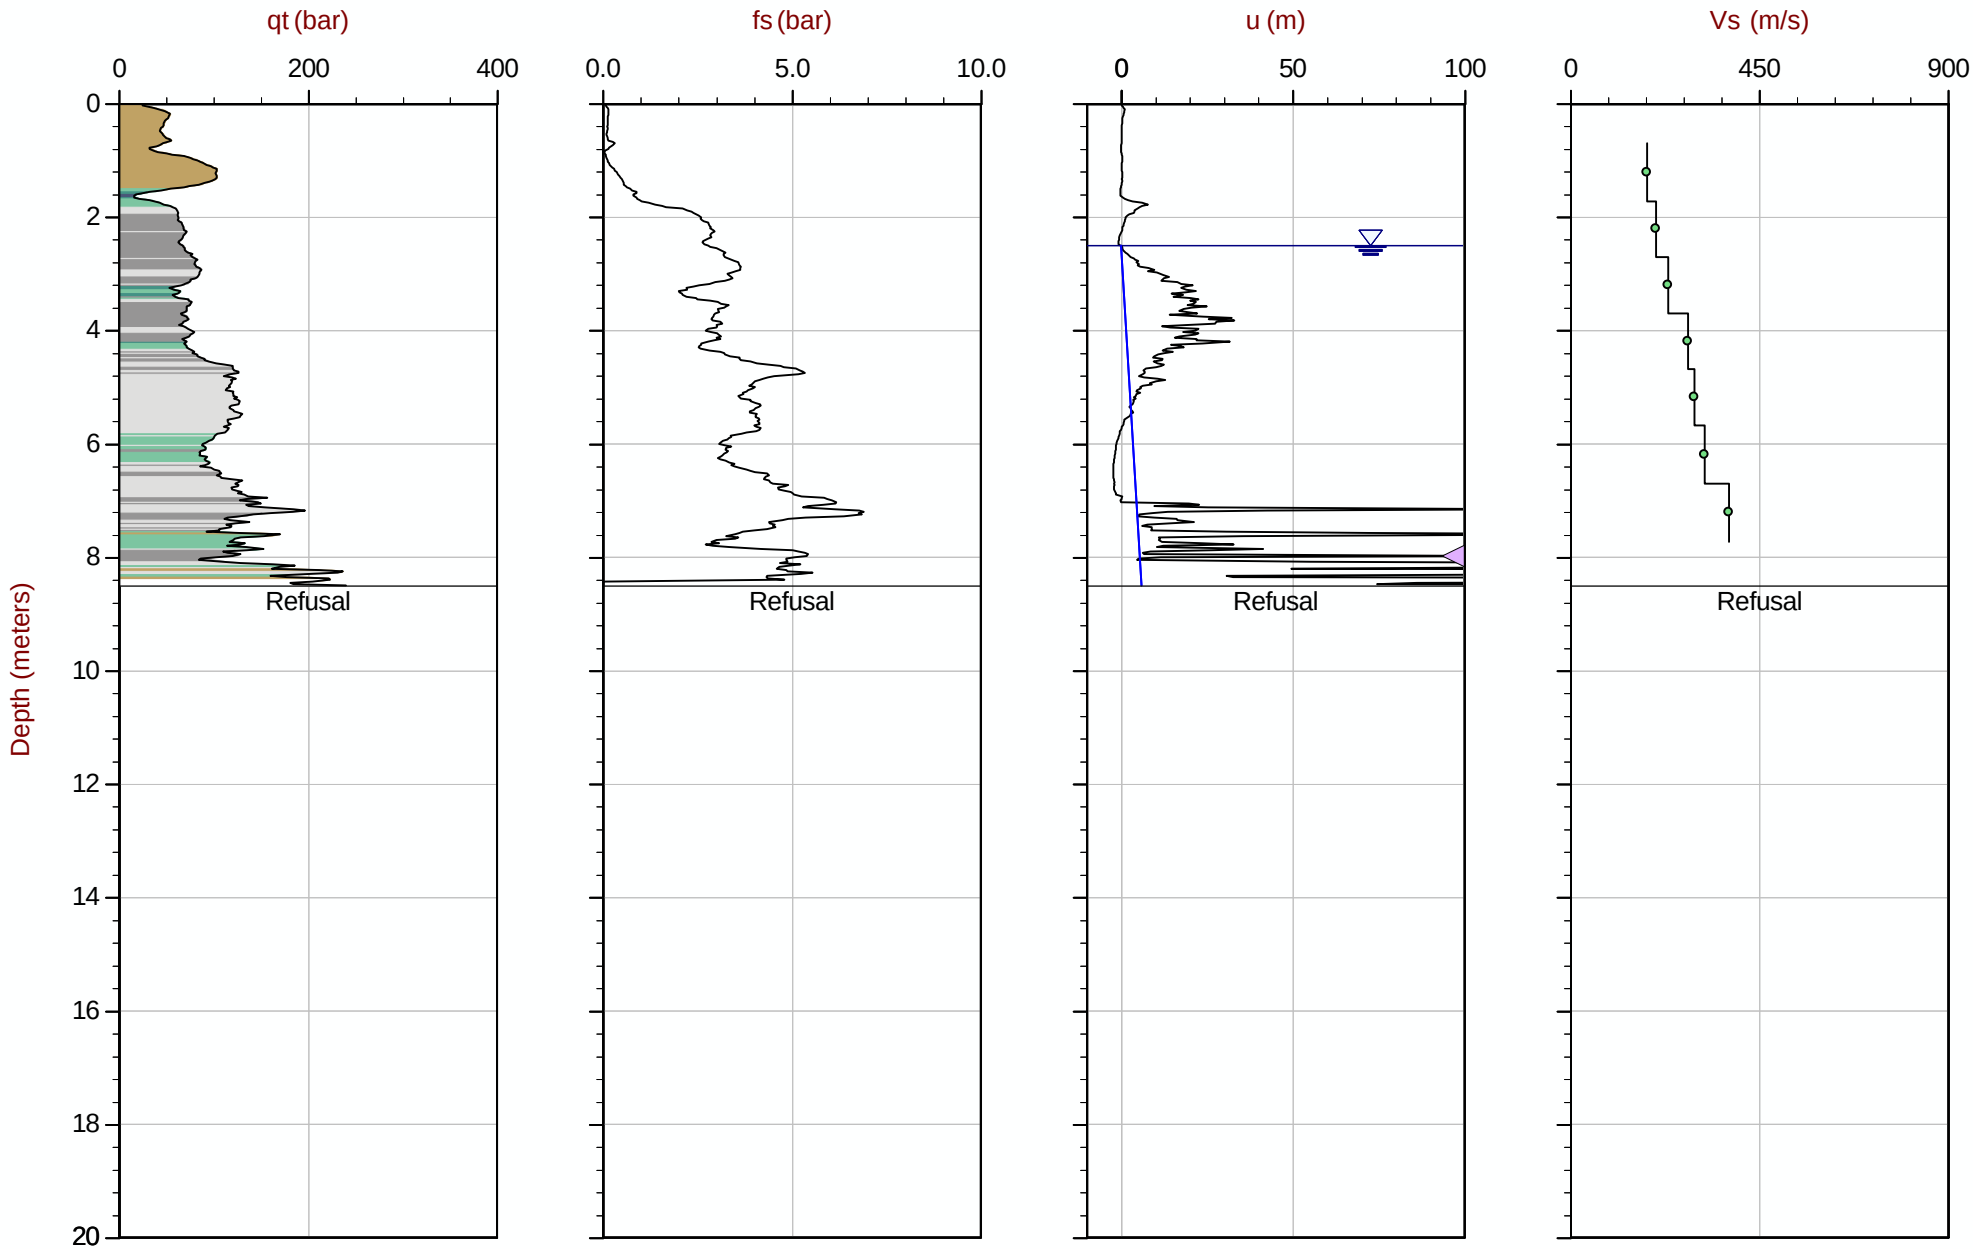

Max Depth: 8.500 m / 27.89 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT138.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612524m E: 416320m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-25 12:47
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT144
Cone: 854:T1500F15U35 Area= 15cm2

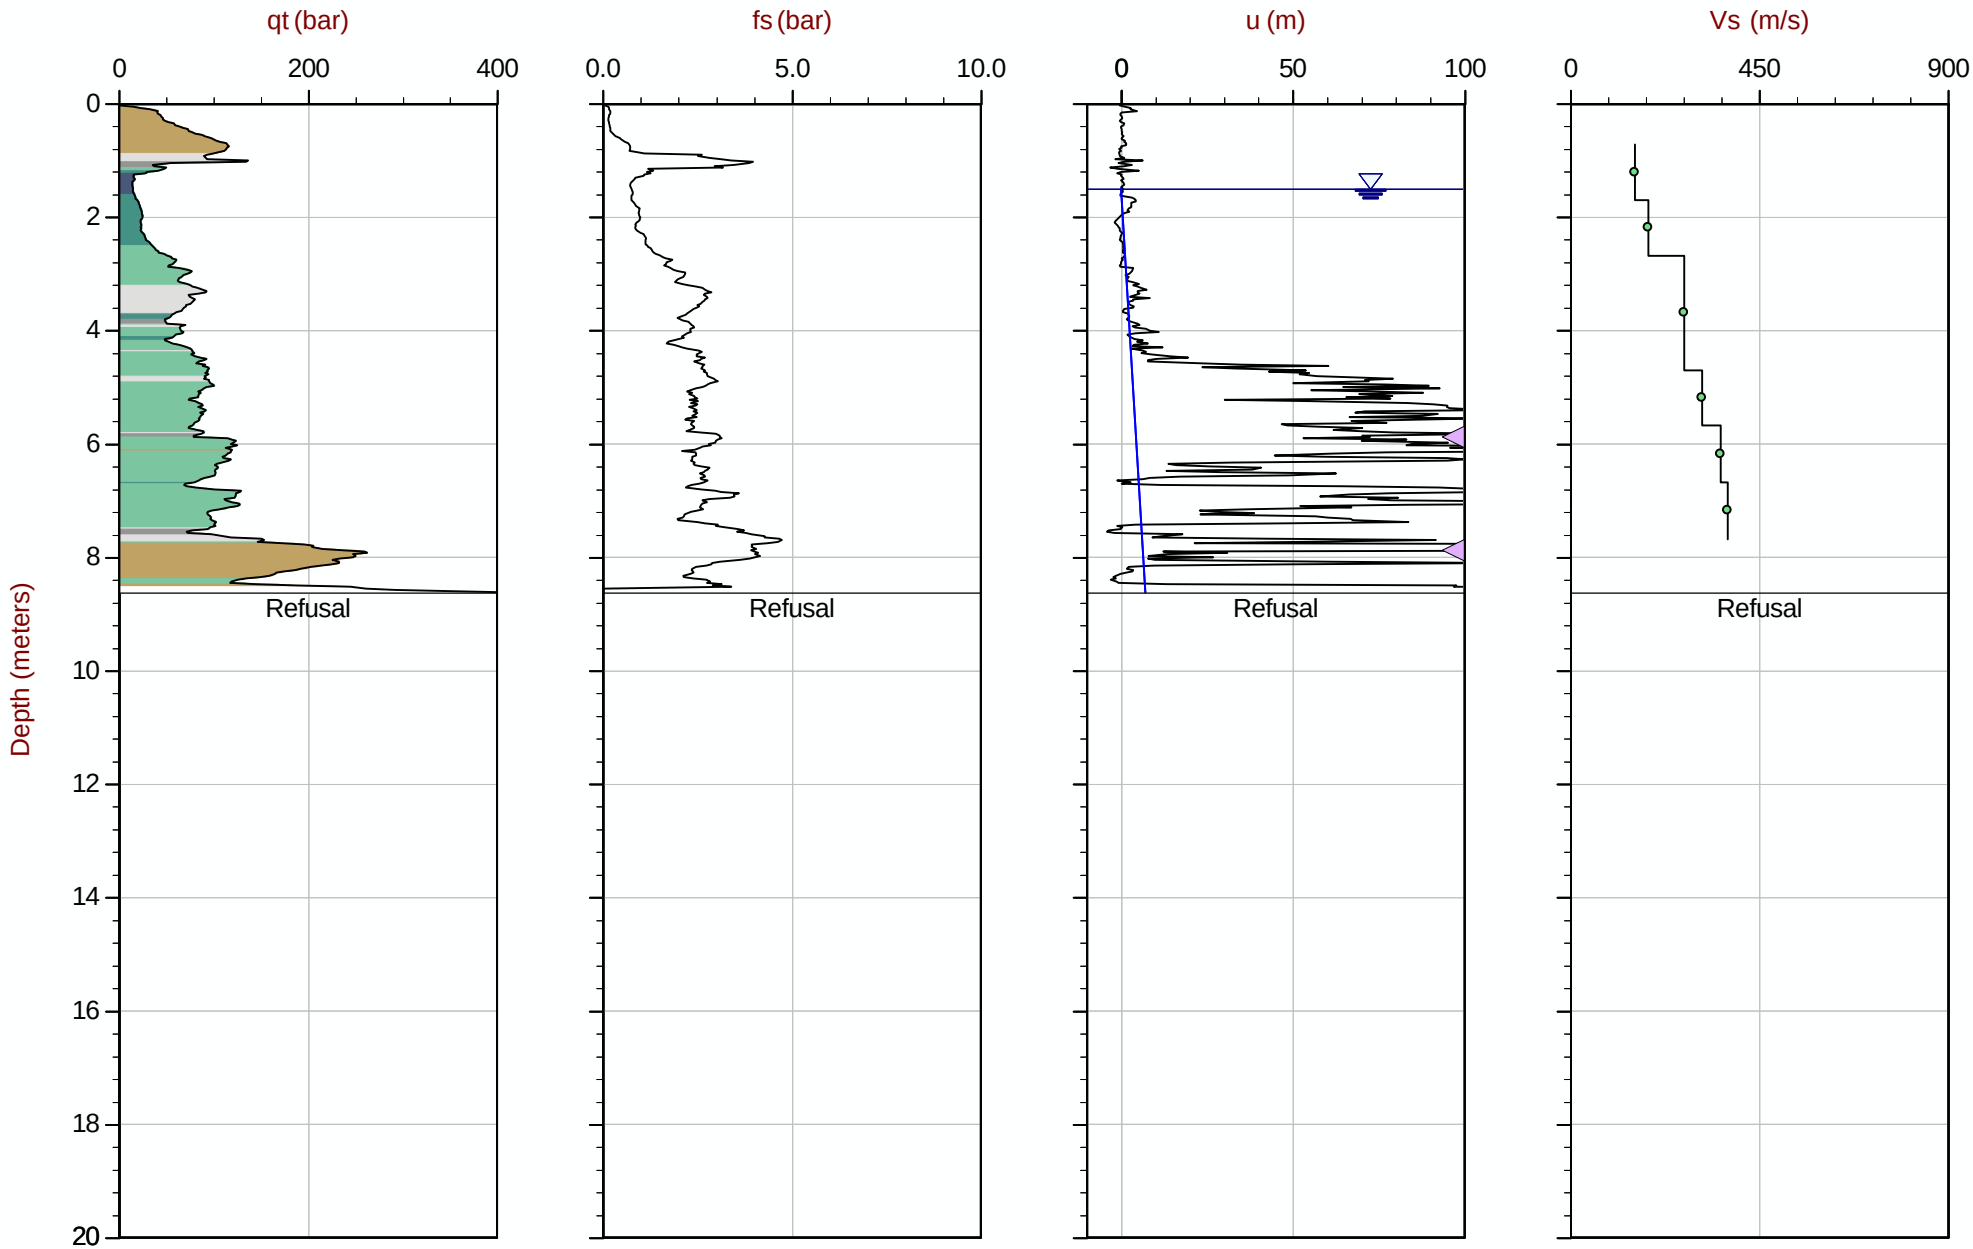

Max Depth: 8.625 m / 28.30 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT144.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612516m E: 416627m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 09:40
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT204
Cone: 854:T1500F15U35 Area= 15cm2

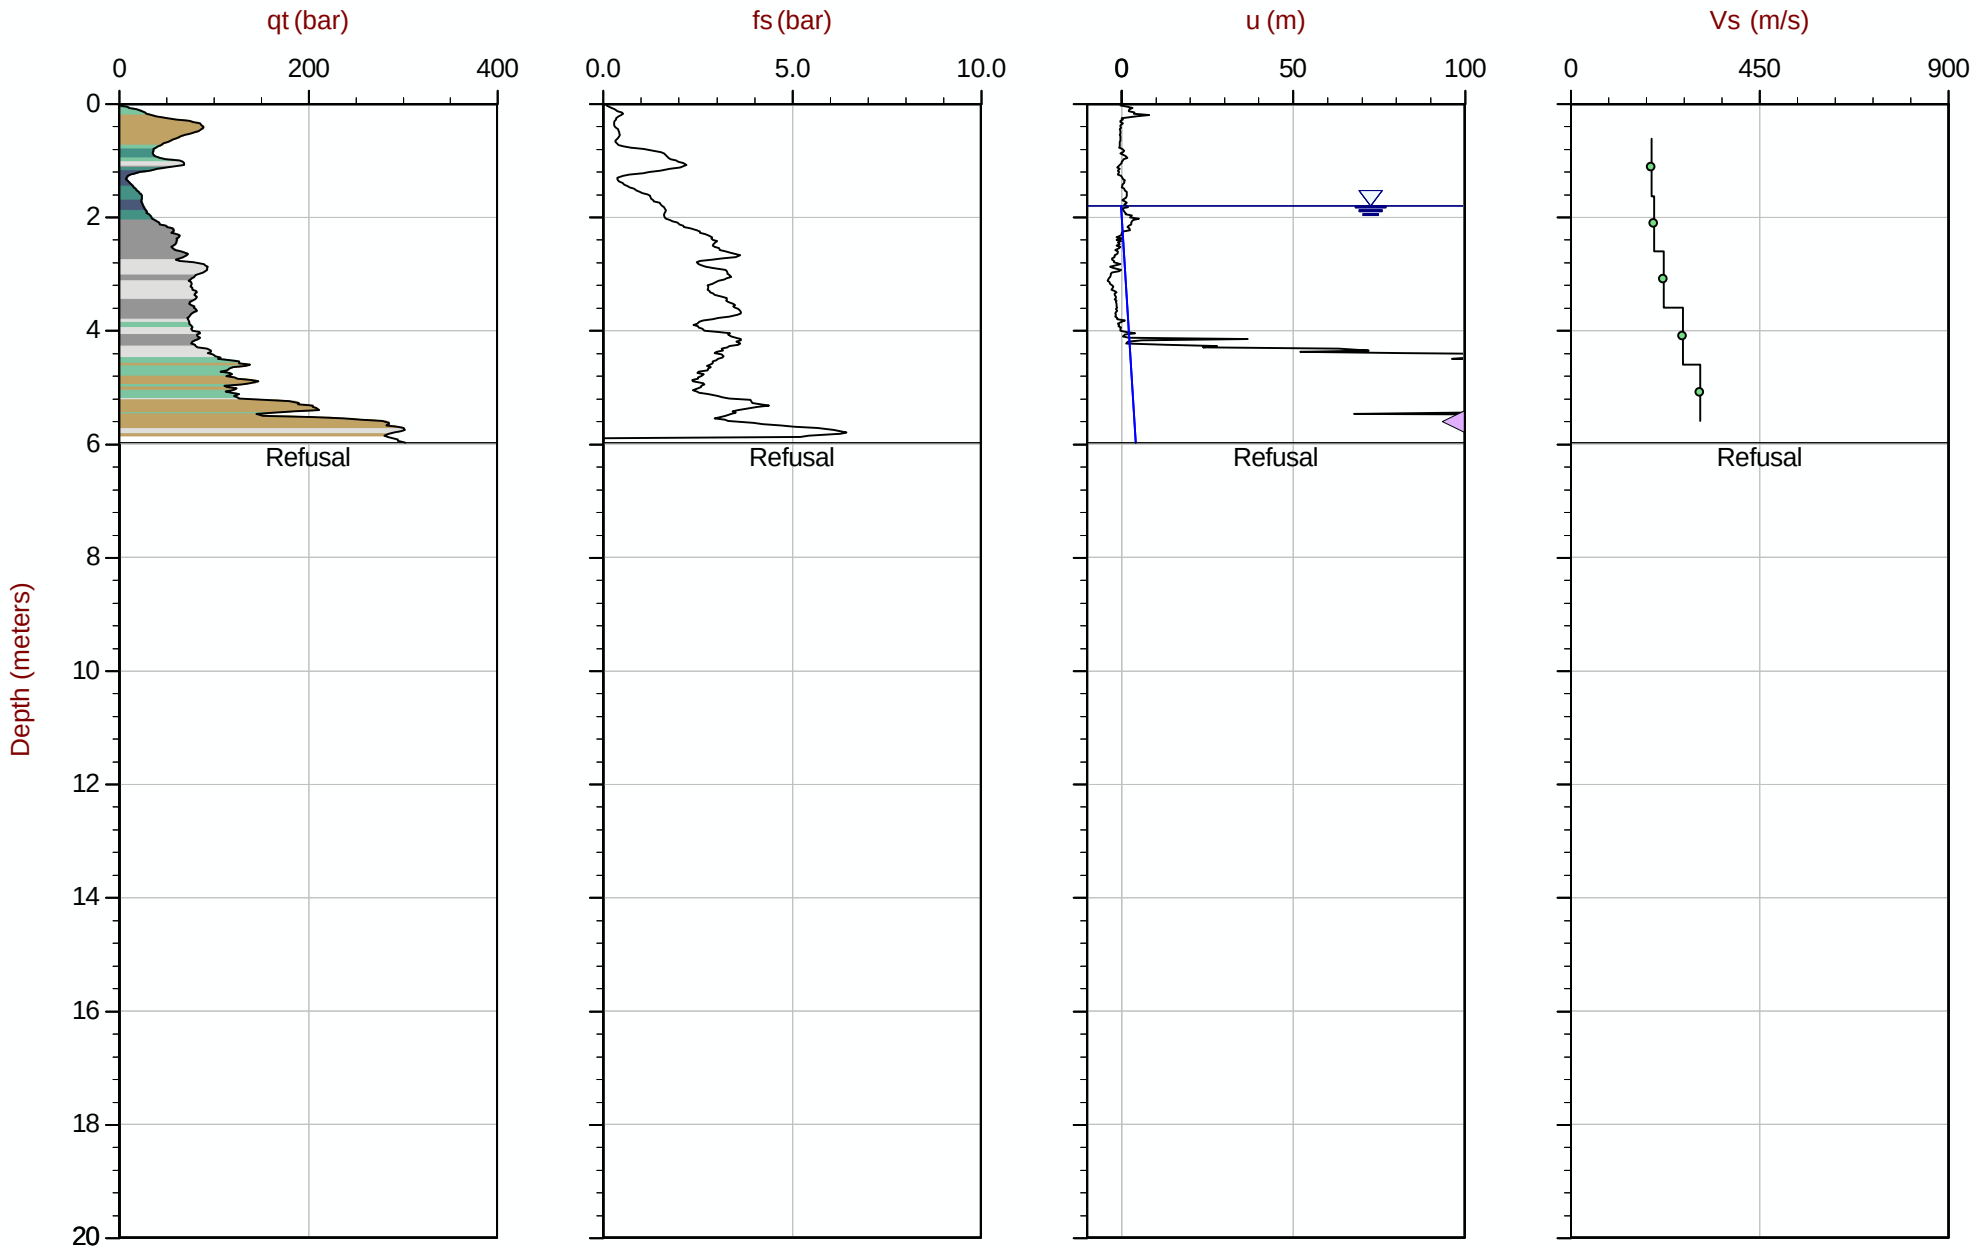

Max Depth: 5.975 m / 19.60 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT204.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612318m E: 416870m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-29 15:07
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT209
Cone: 854:T1500F15U35 Area= 15cm2

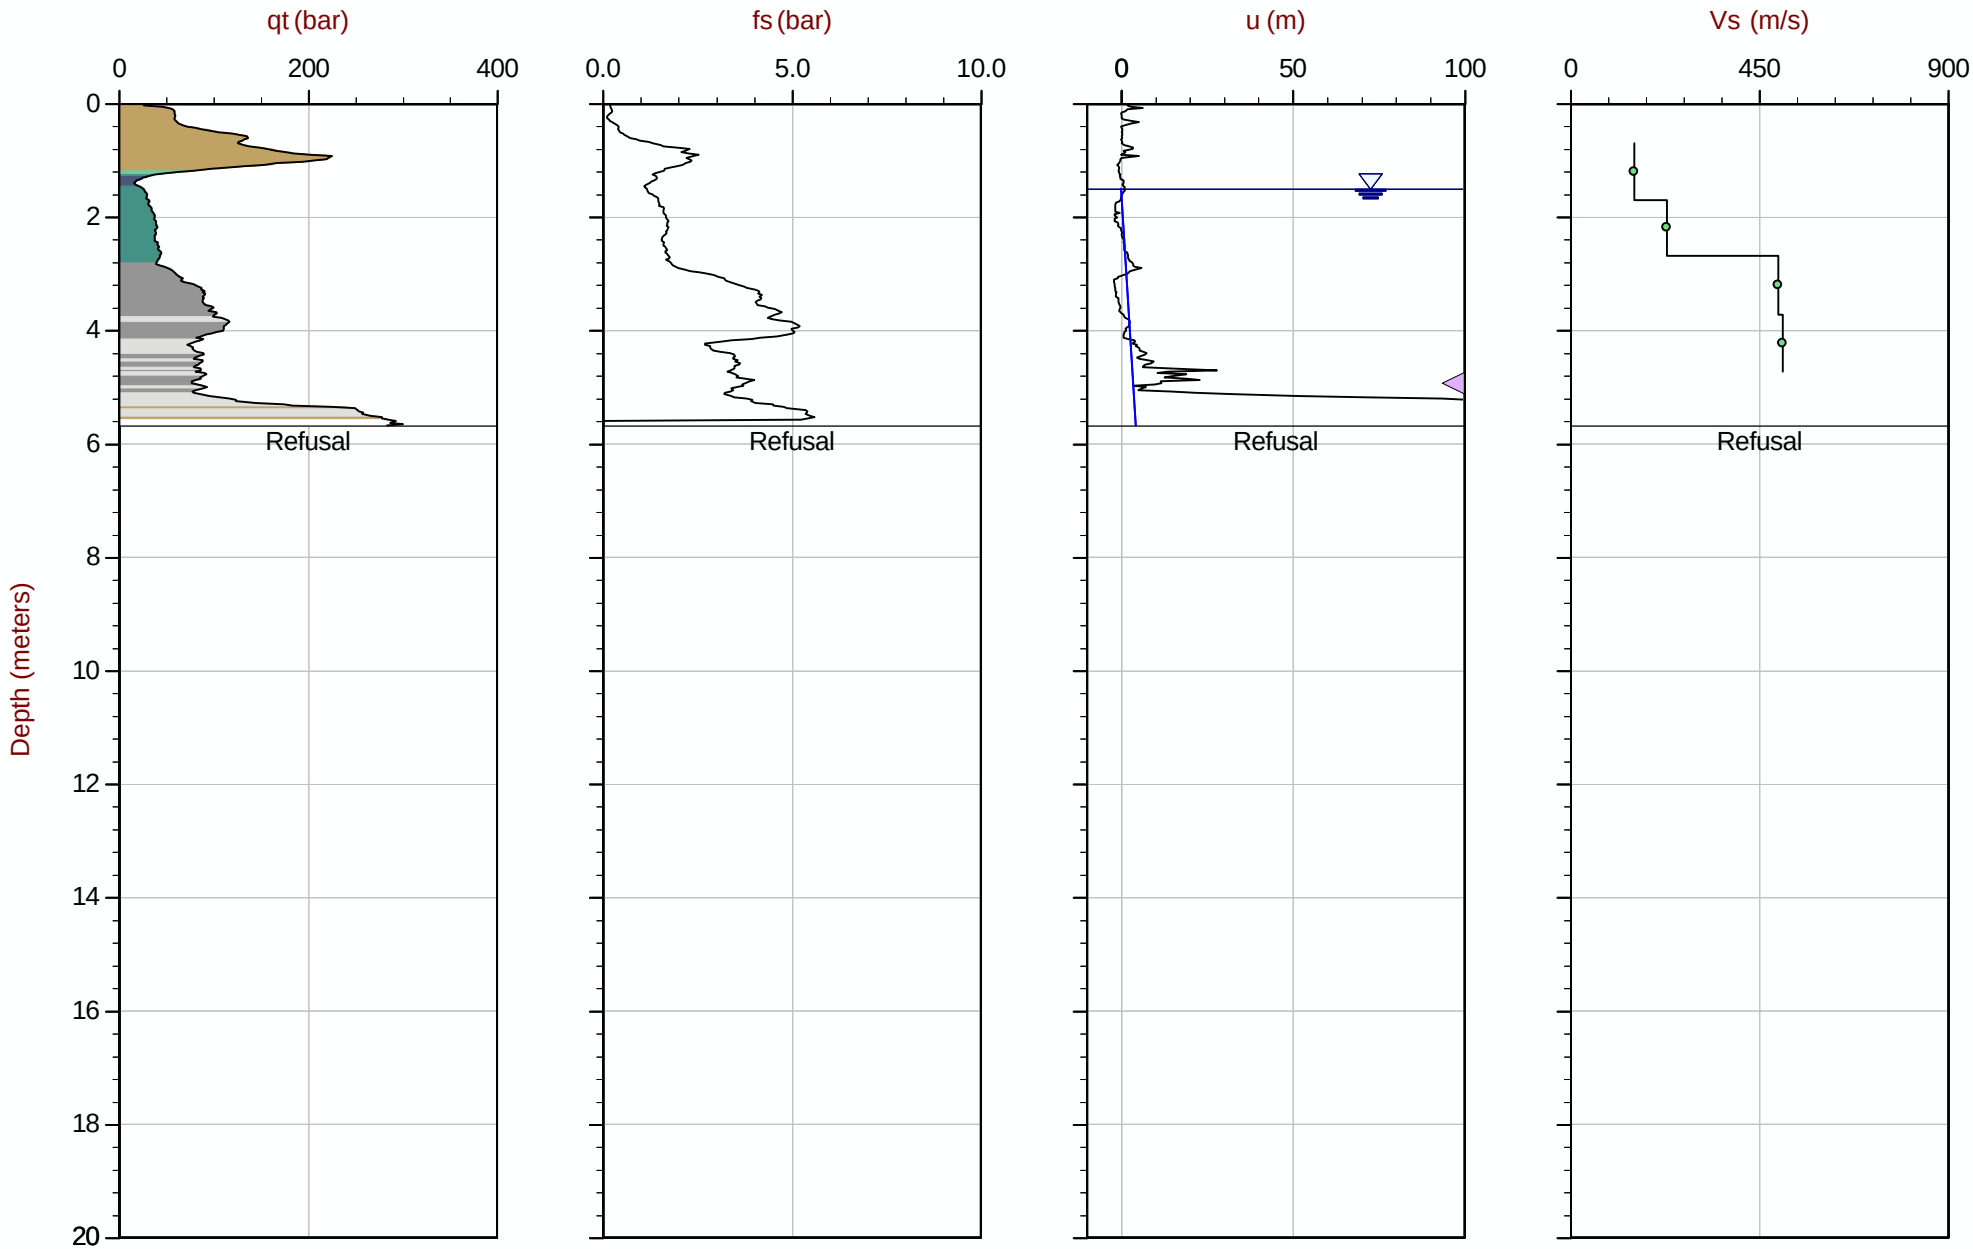

Max Depth: 5.675 m / 18.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT209.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5612057m E: 416883m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 09:20
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT215
Cone: 854:T1500F15U35 Area= 15cm2

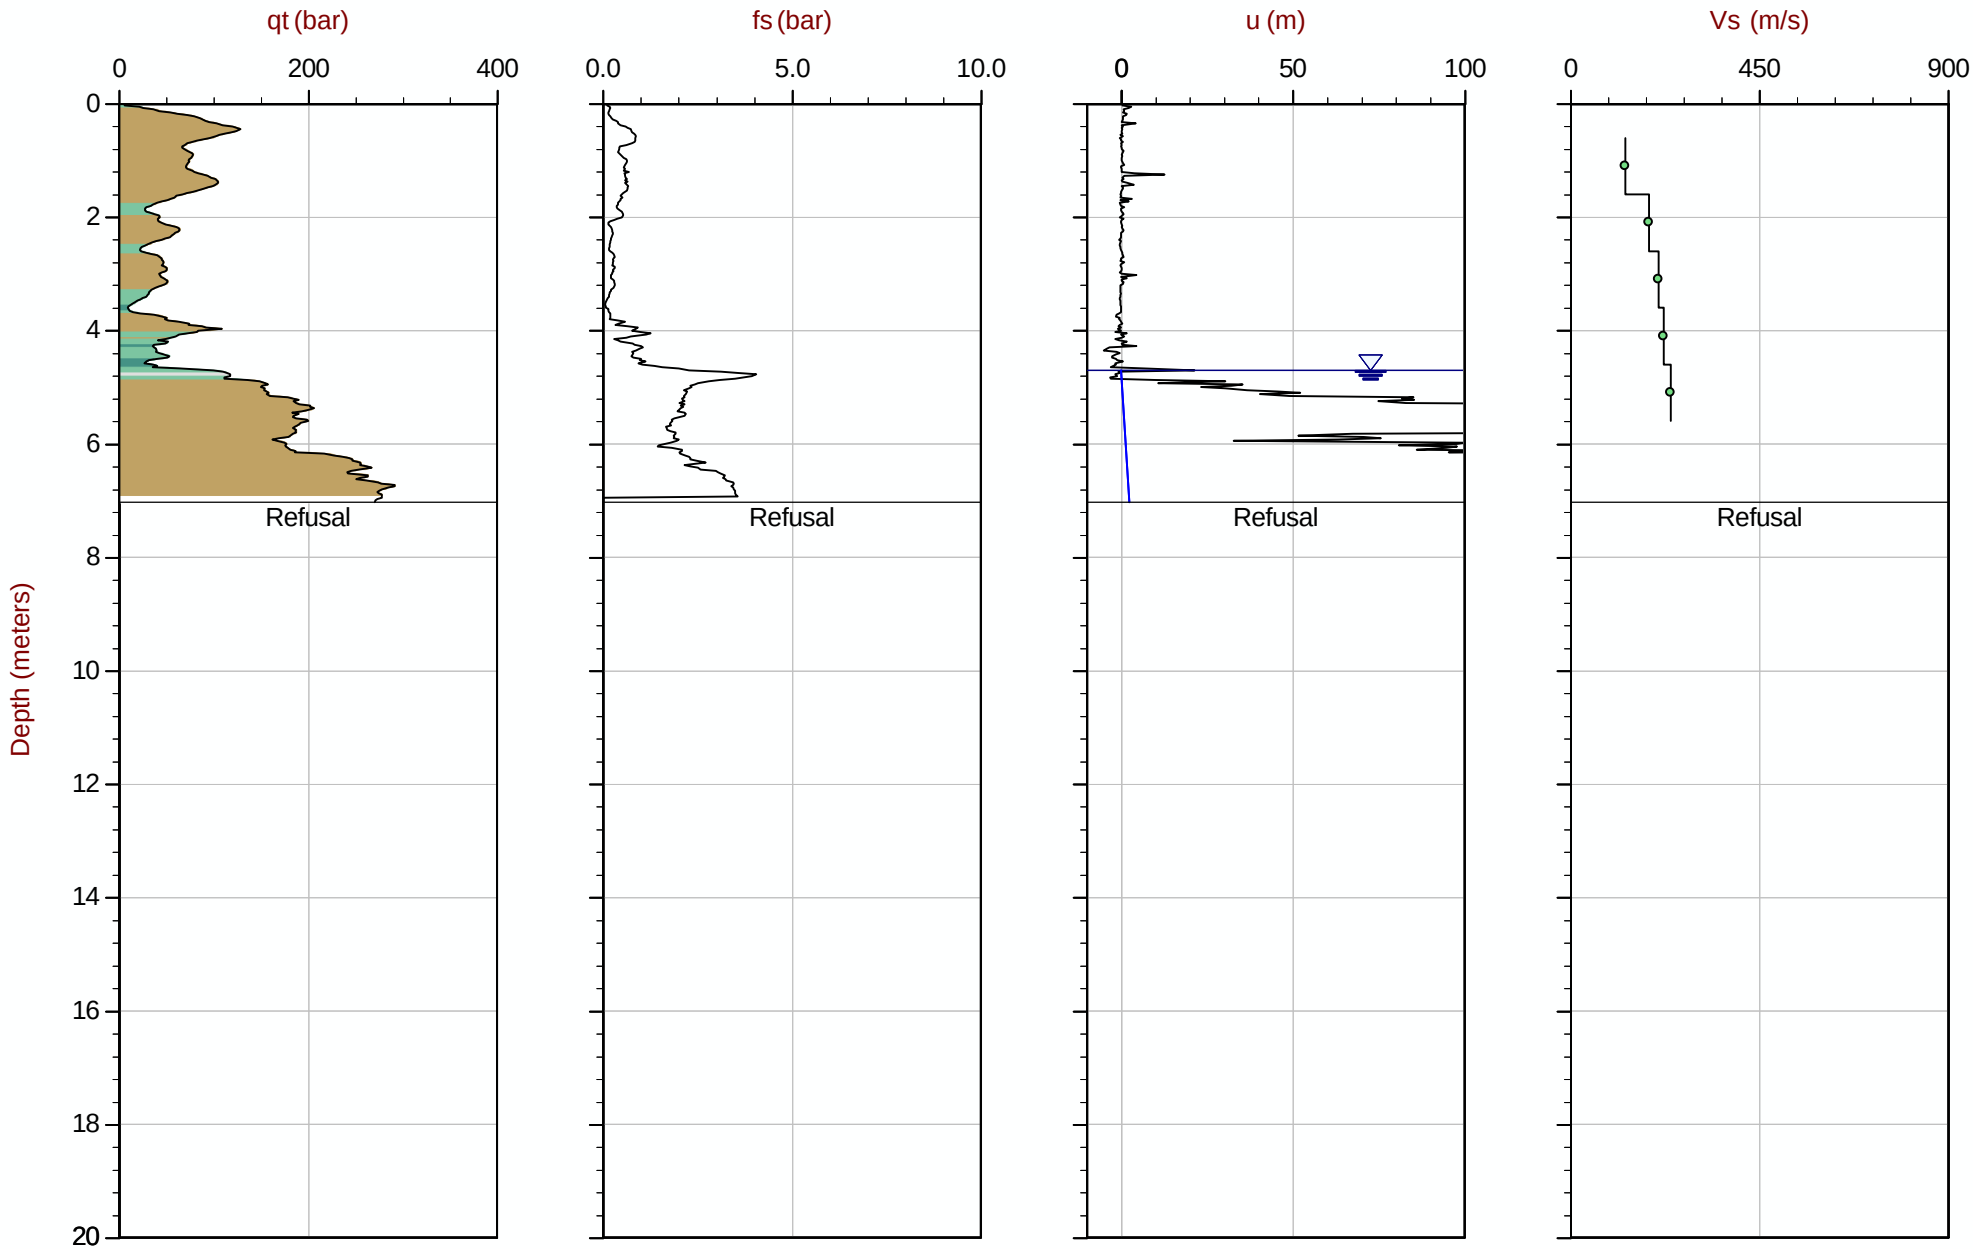

Max Depth: 7.025 m / 23.05 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT215.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611757m E: 416875m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-30 17:44
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT221
Cone: 854:T1500F15U35 Area= 15cm2

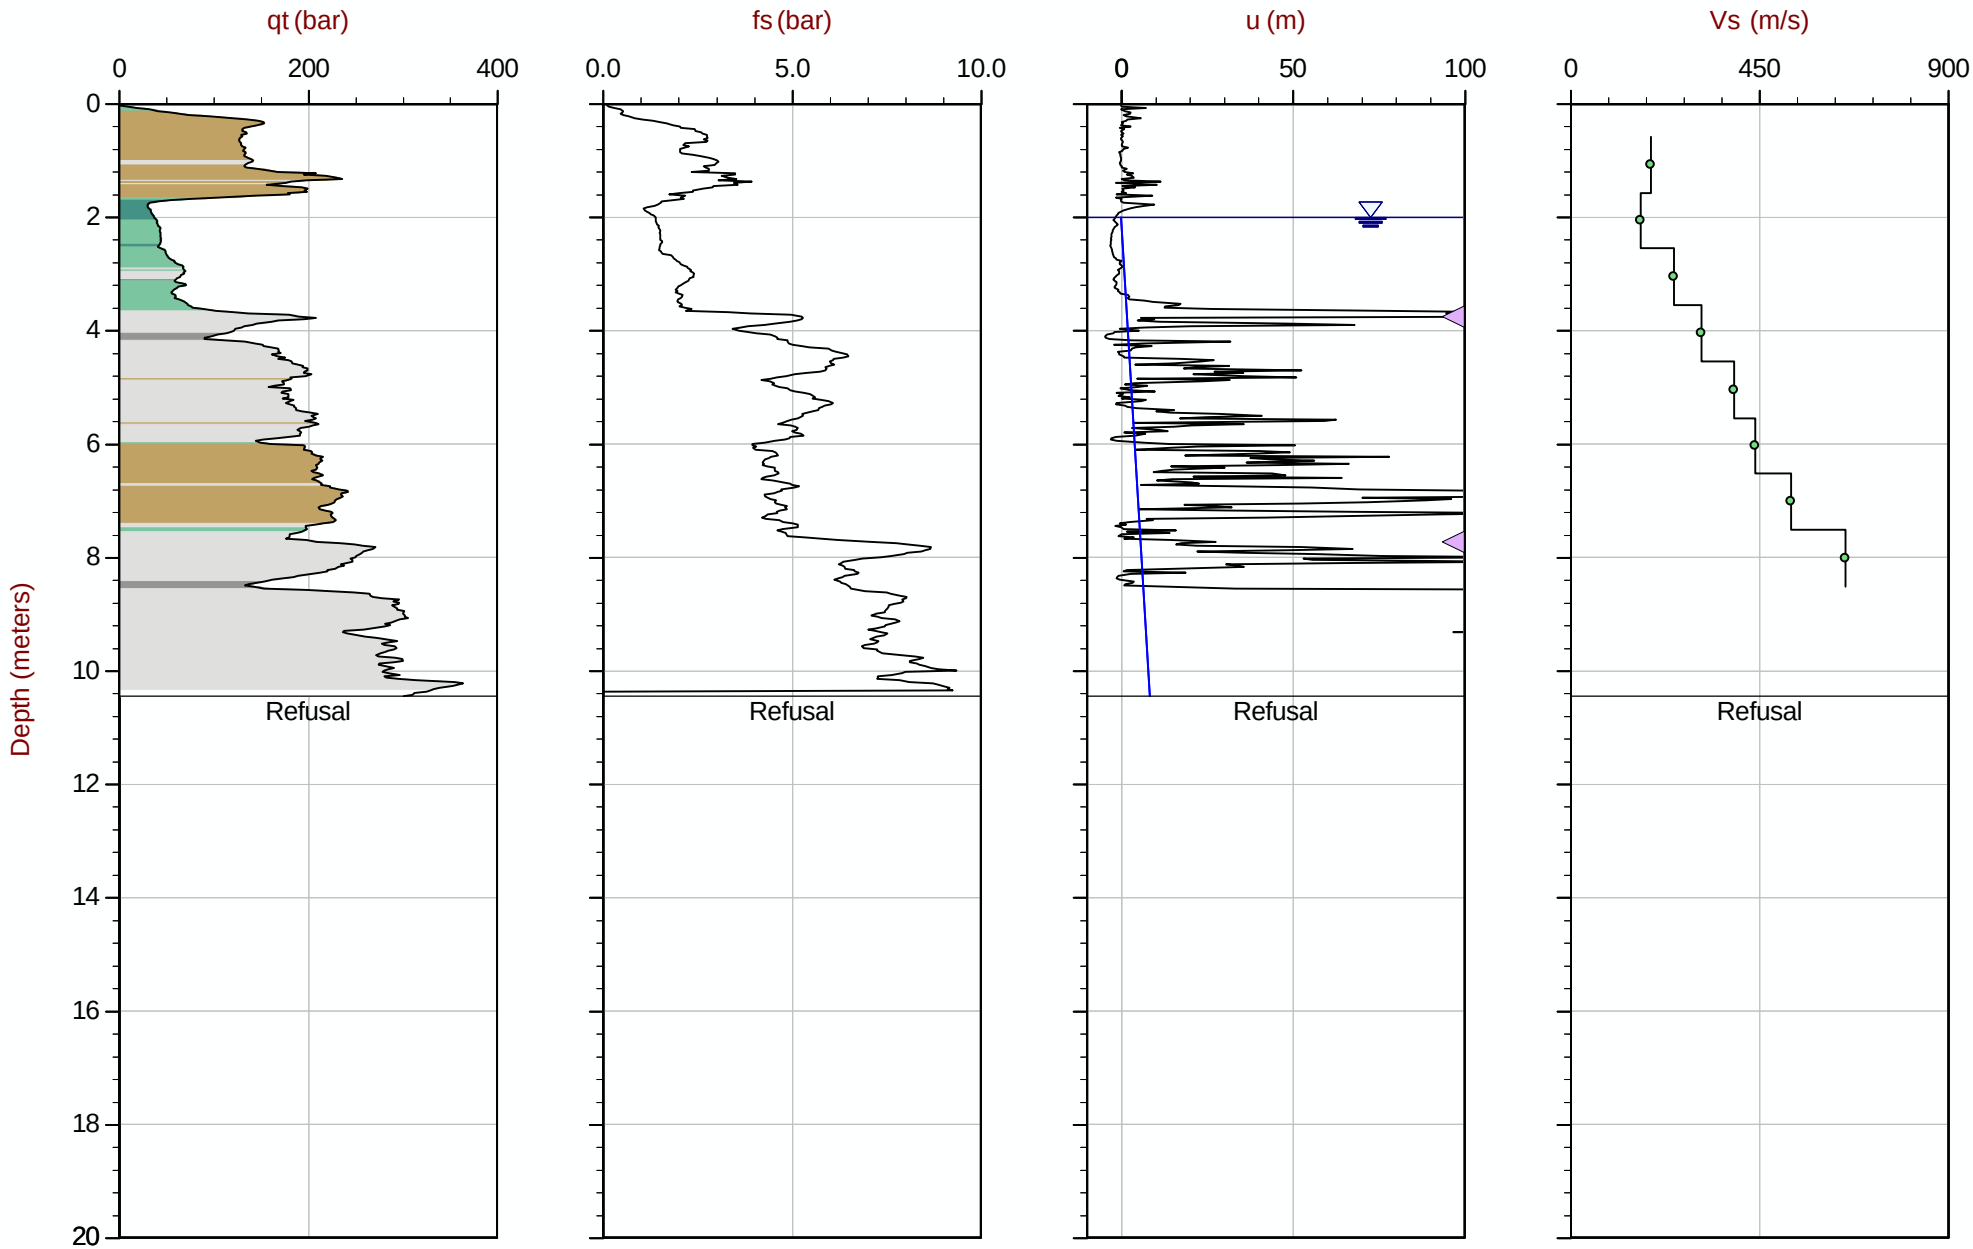

Max Depth: 10.450 m / 34.28 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT221.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611457m E: 416868m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-31 12:42
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT227
Cone: 854:T1500F15U35 Area= 15cm2

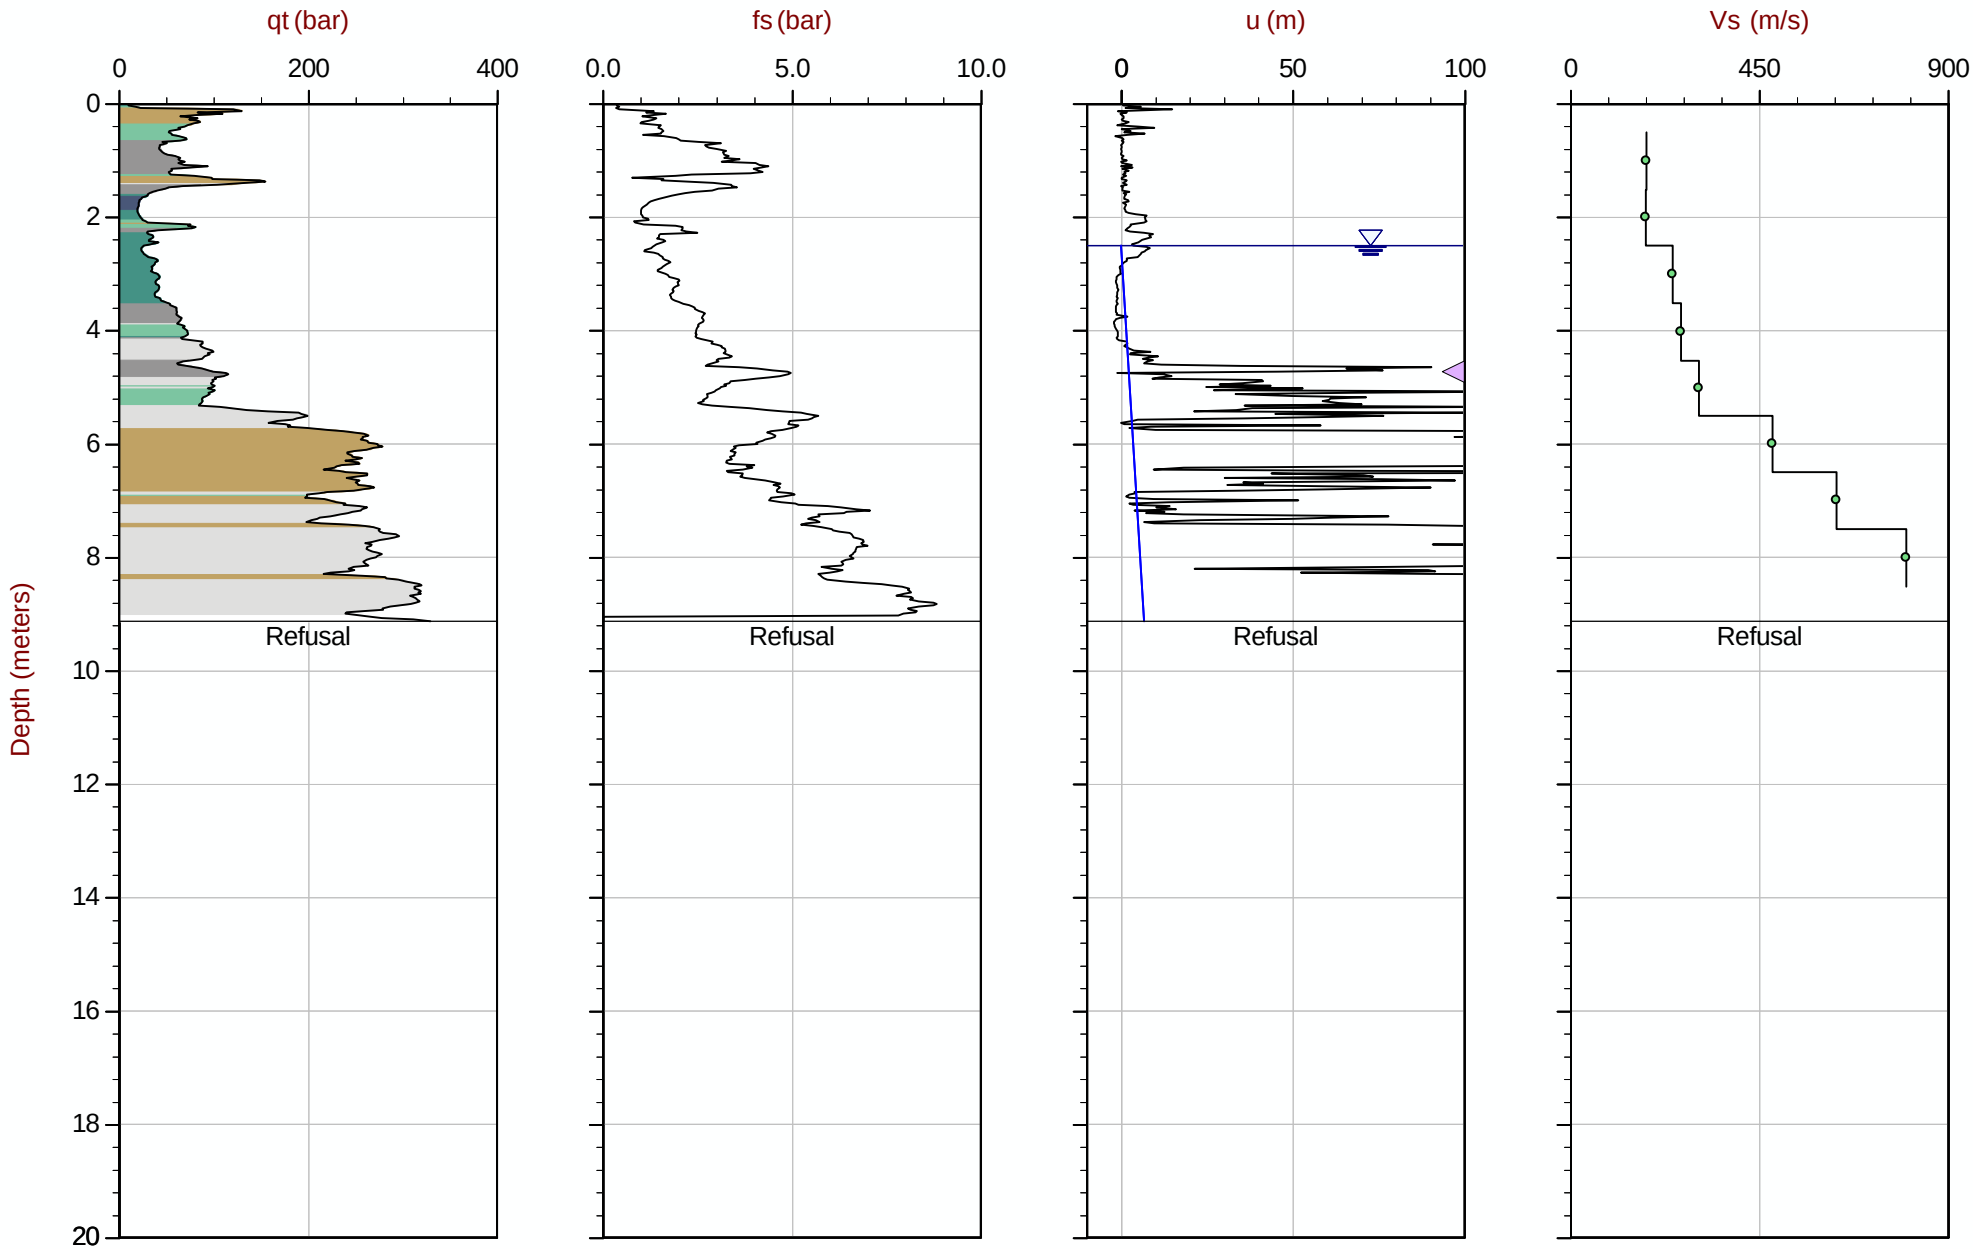

Max Depth: 9.125 m / 29.94 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT227.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5611150m E: 416860m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-26 12:15
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT233
Cone: 854:T1500F15U35 Area= 15cm2

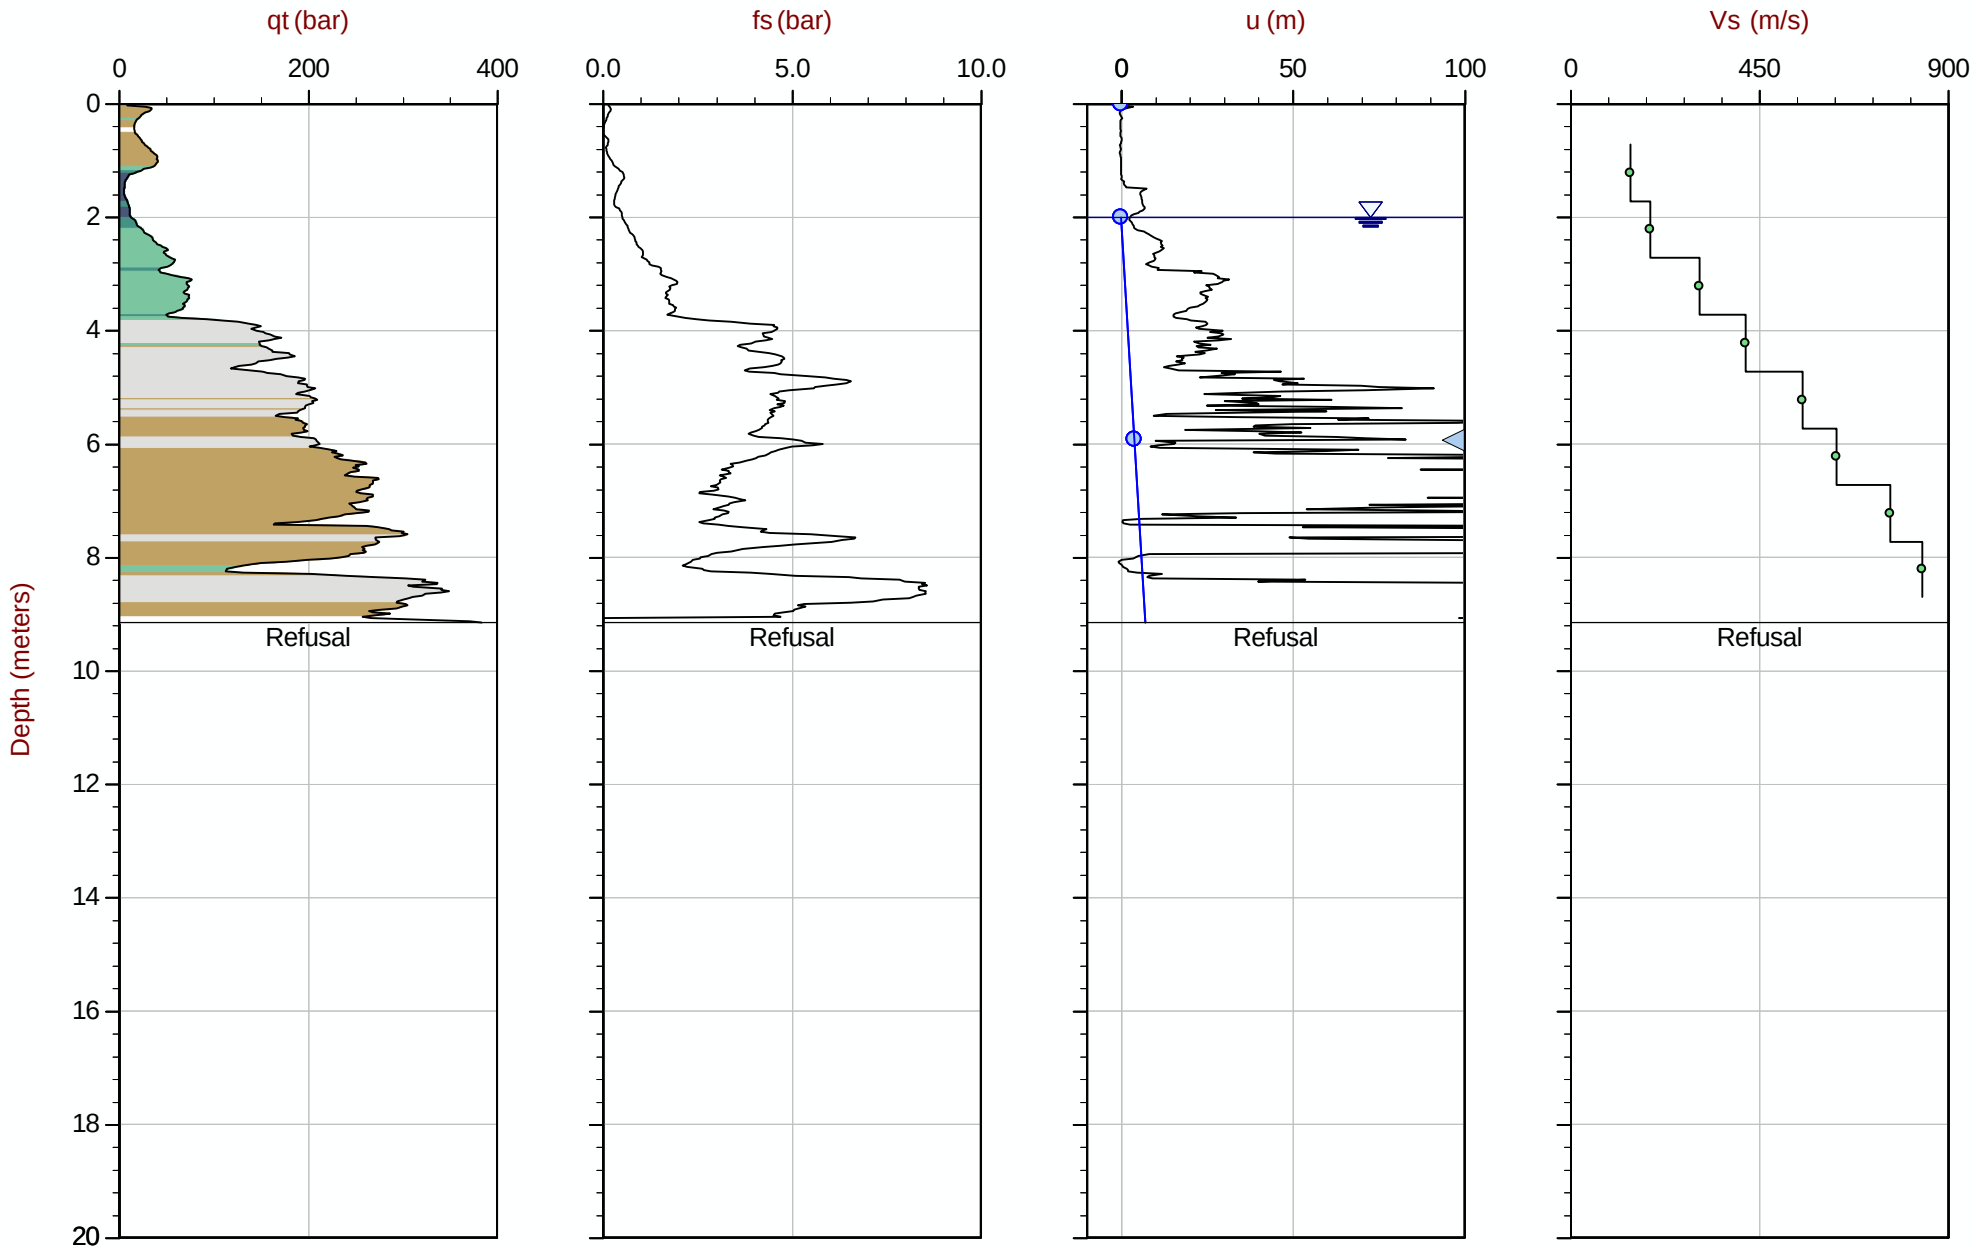

Max Depth: 9.150 m / 30.02 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT233.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610858m E: 416858m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 08:41
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT239
Cone: 854:T1500F15U35 Area= 15cm2

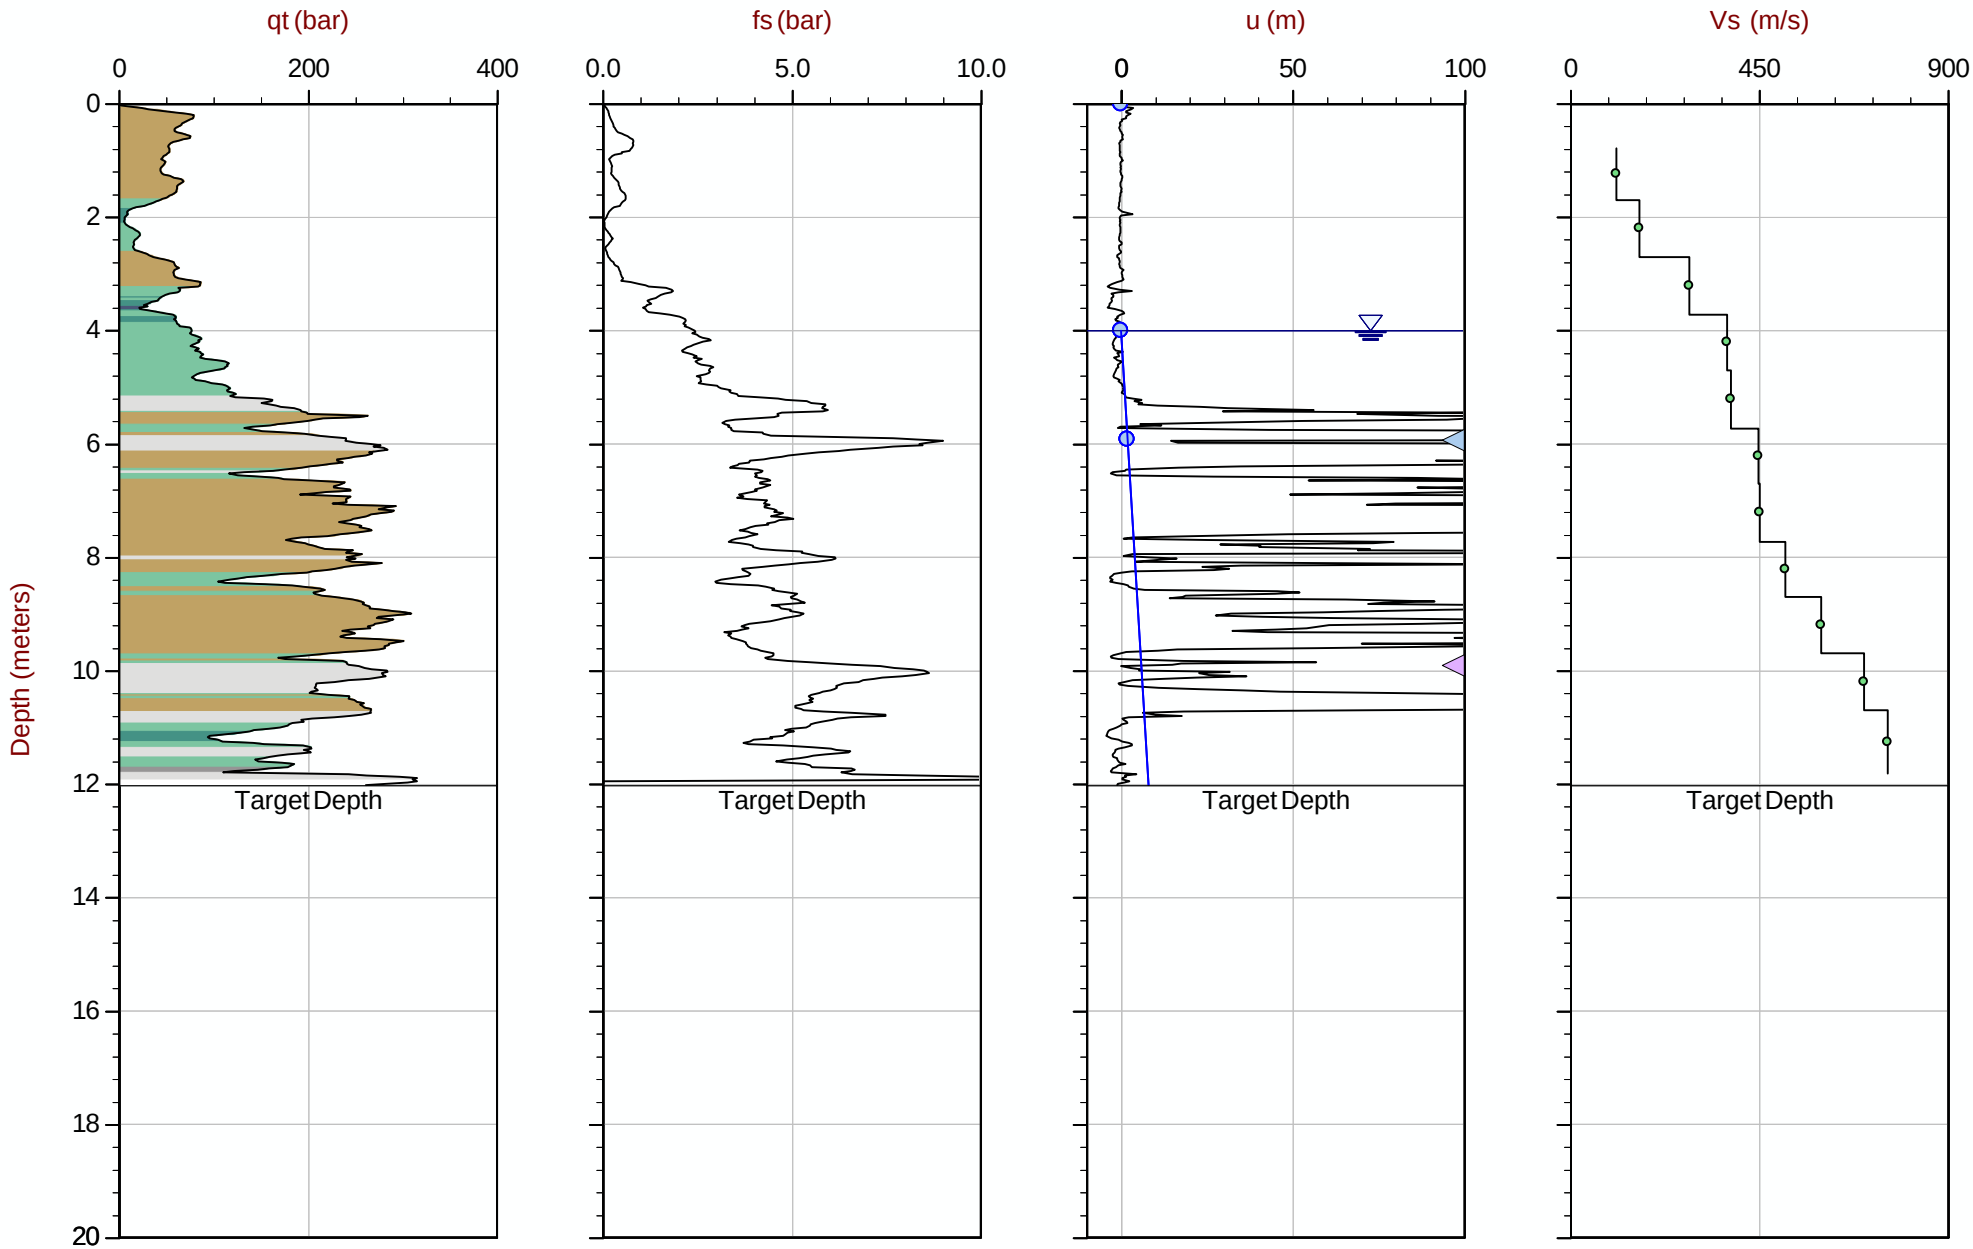

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT239.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610550m E: 416856m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-03-27 17:12
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT245
Cone: 854:T1500F15U35 Area= 15cm2

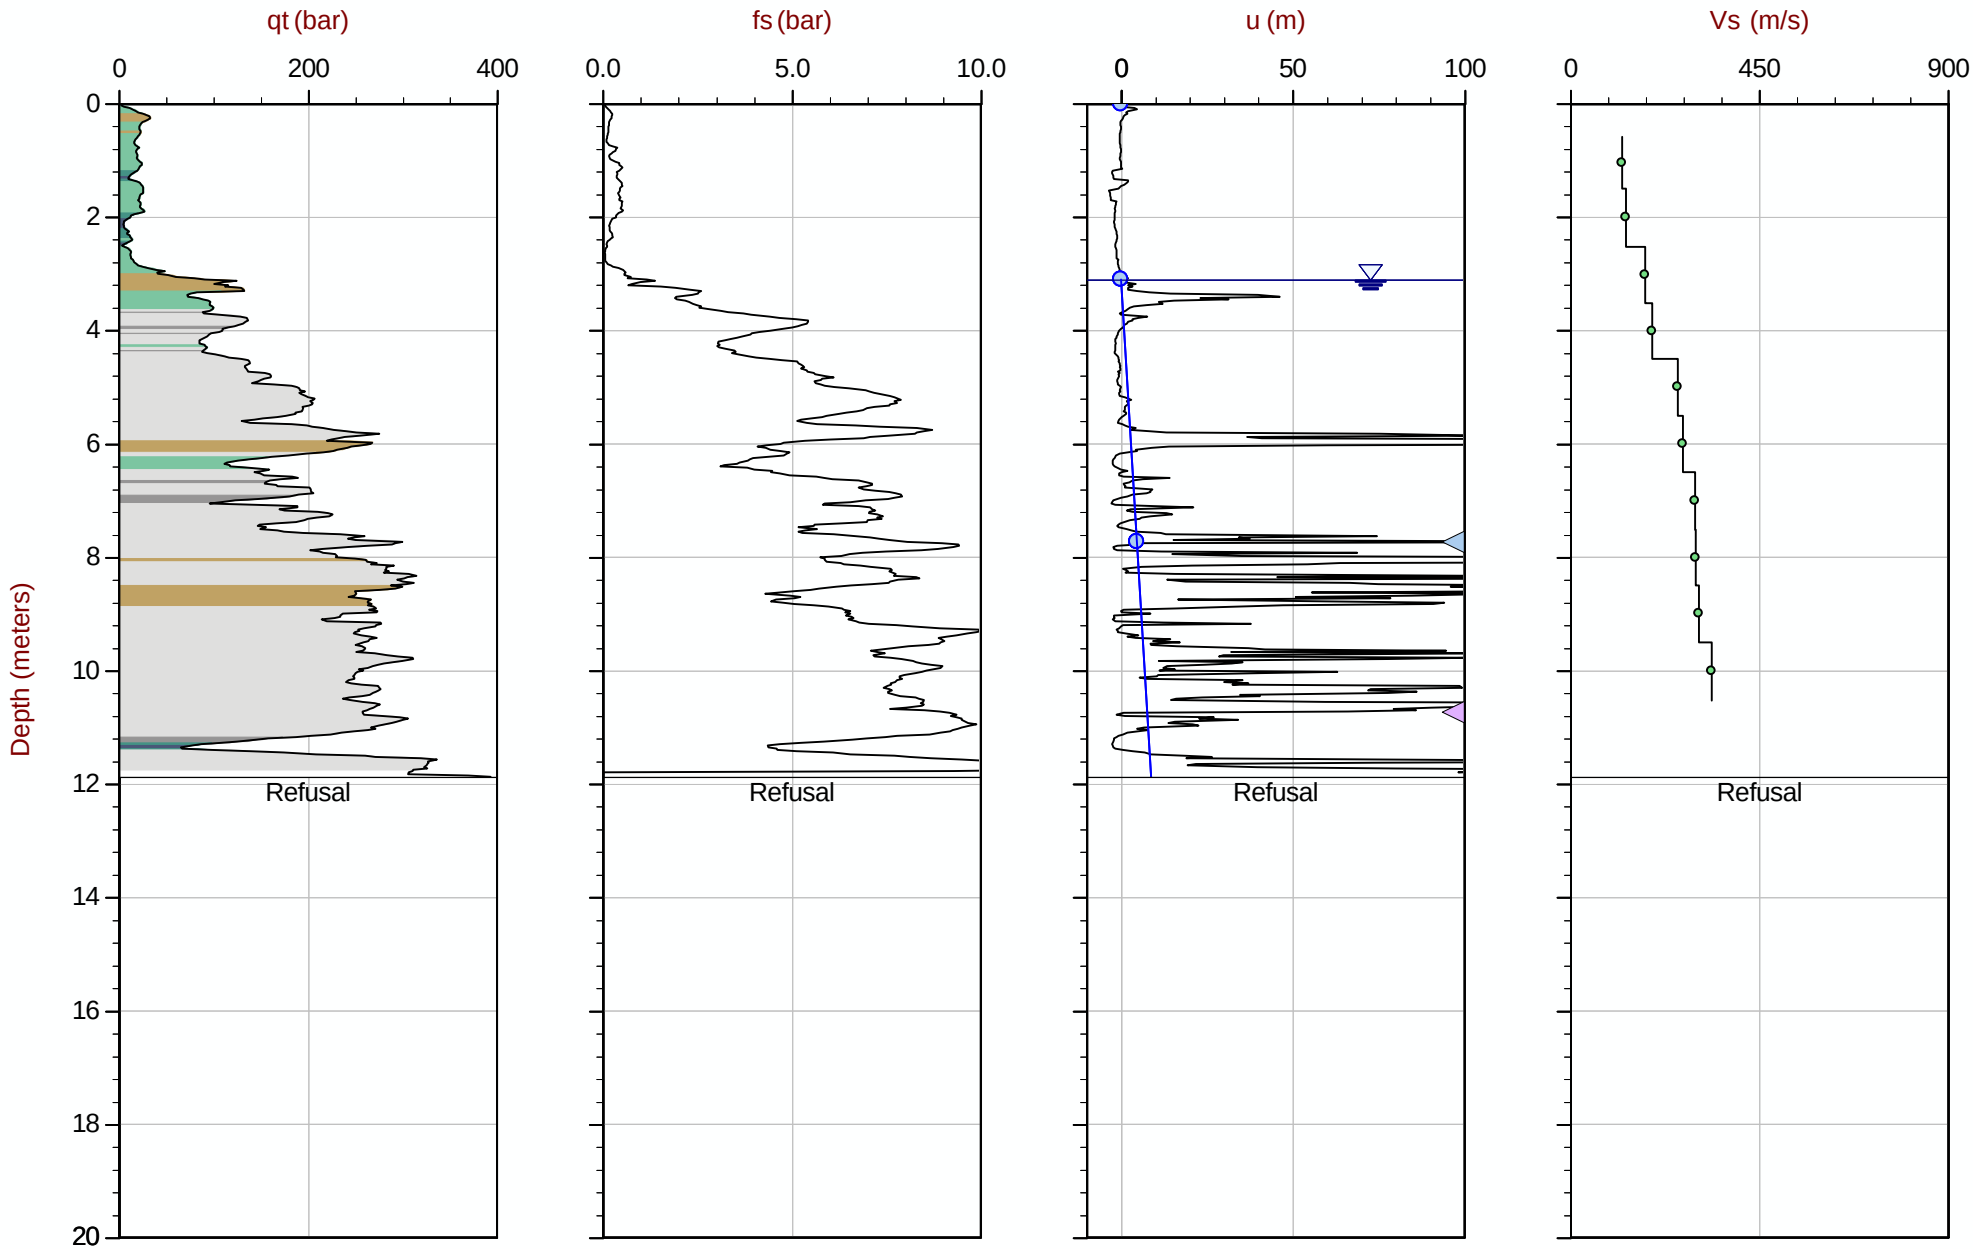

Max Depth: 11.875 m / 38.96 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT245.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5610257m E: 416848m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-02 15:05
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT252
Cone: 854:T1500F15U35 Area= 15cm2

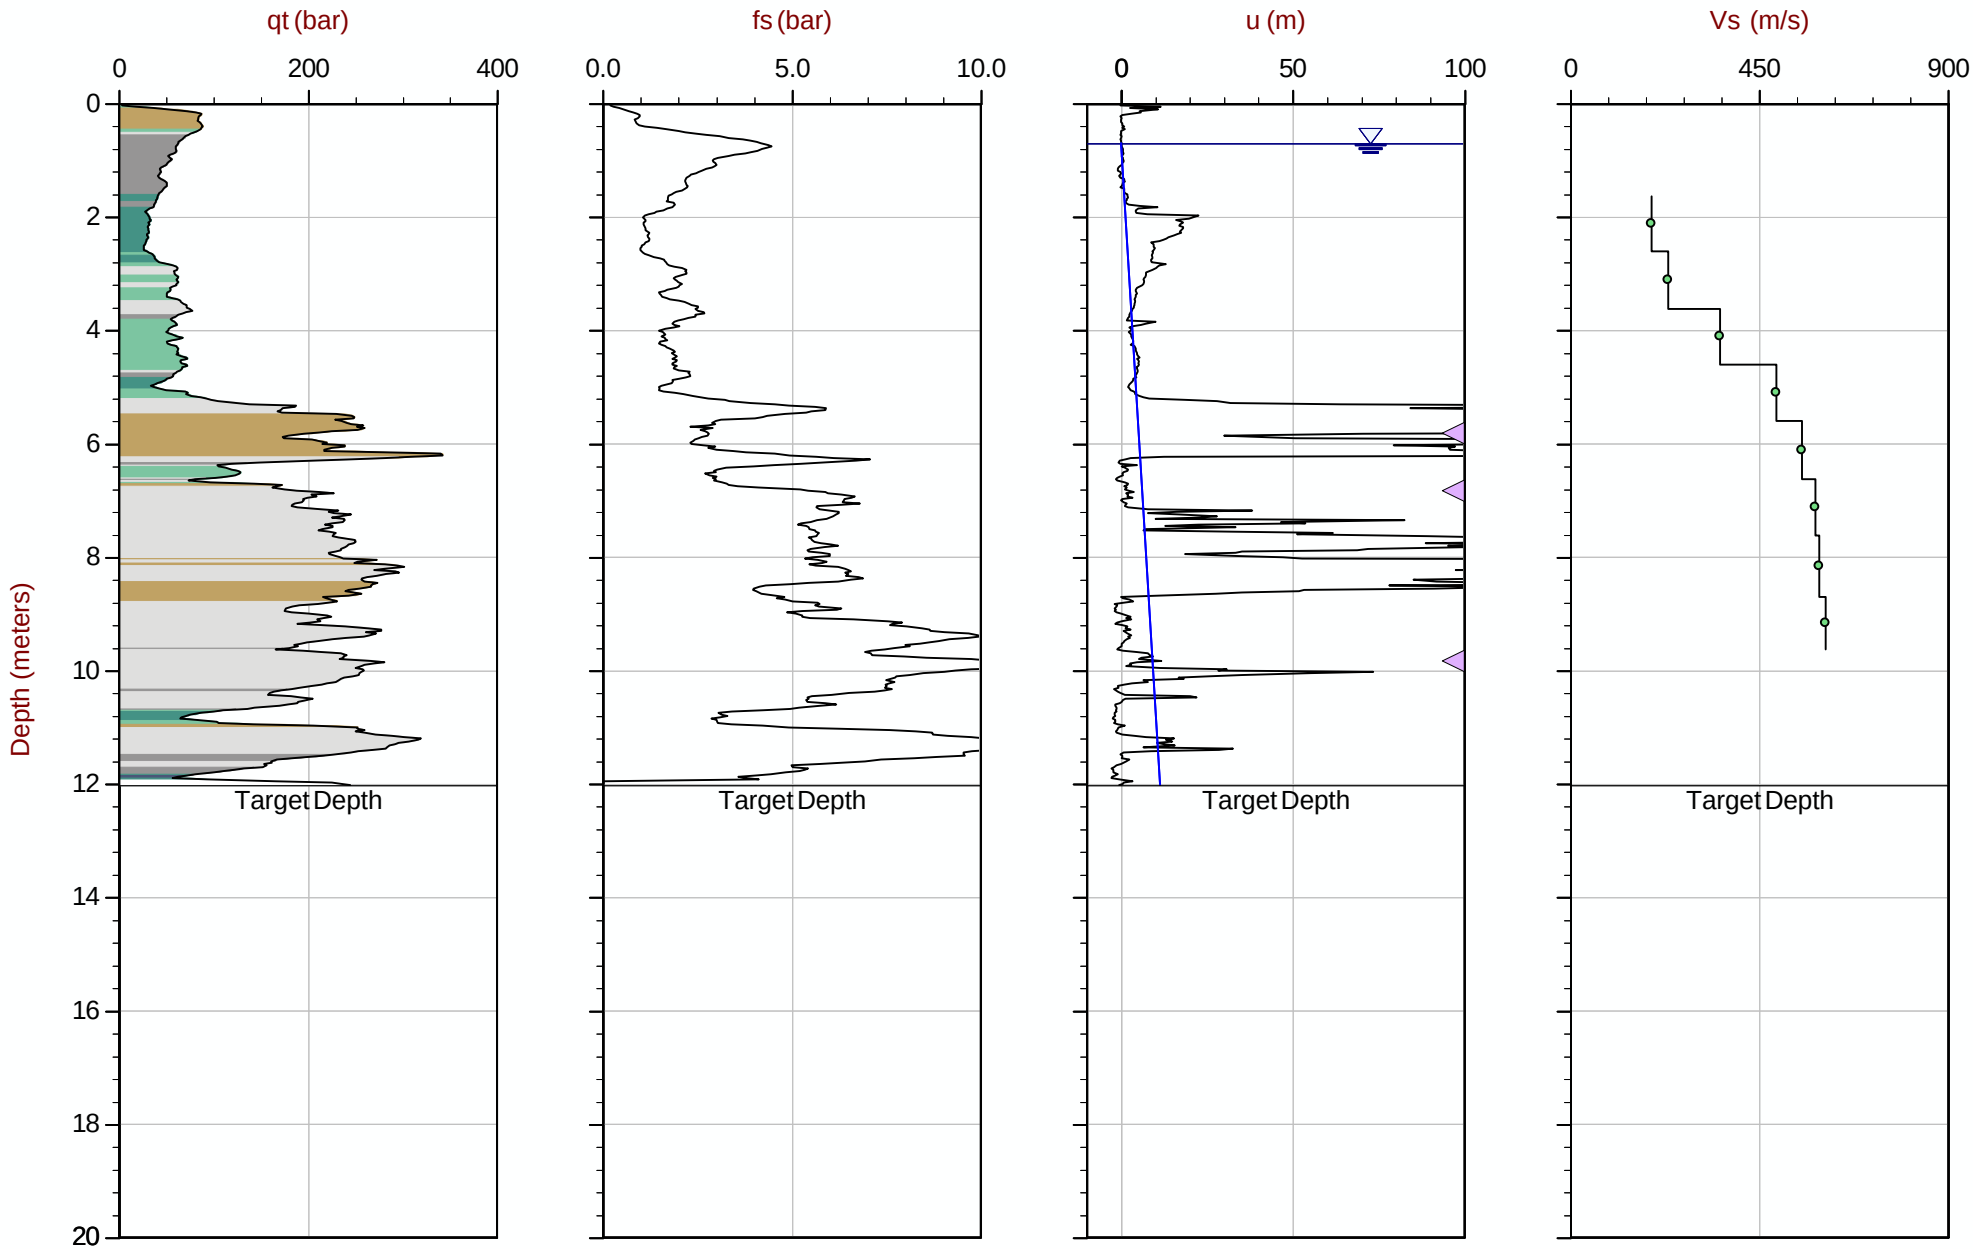

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT252.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609909m E: 416838m Elev: N/Am
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-04 13:54
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT256
Cone: 854:T1500F15U35 Area= 15cm2

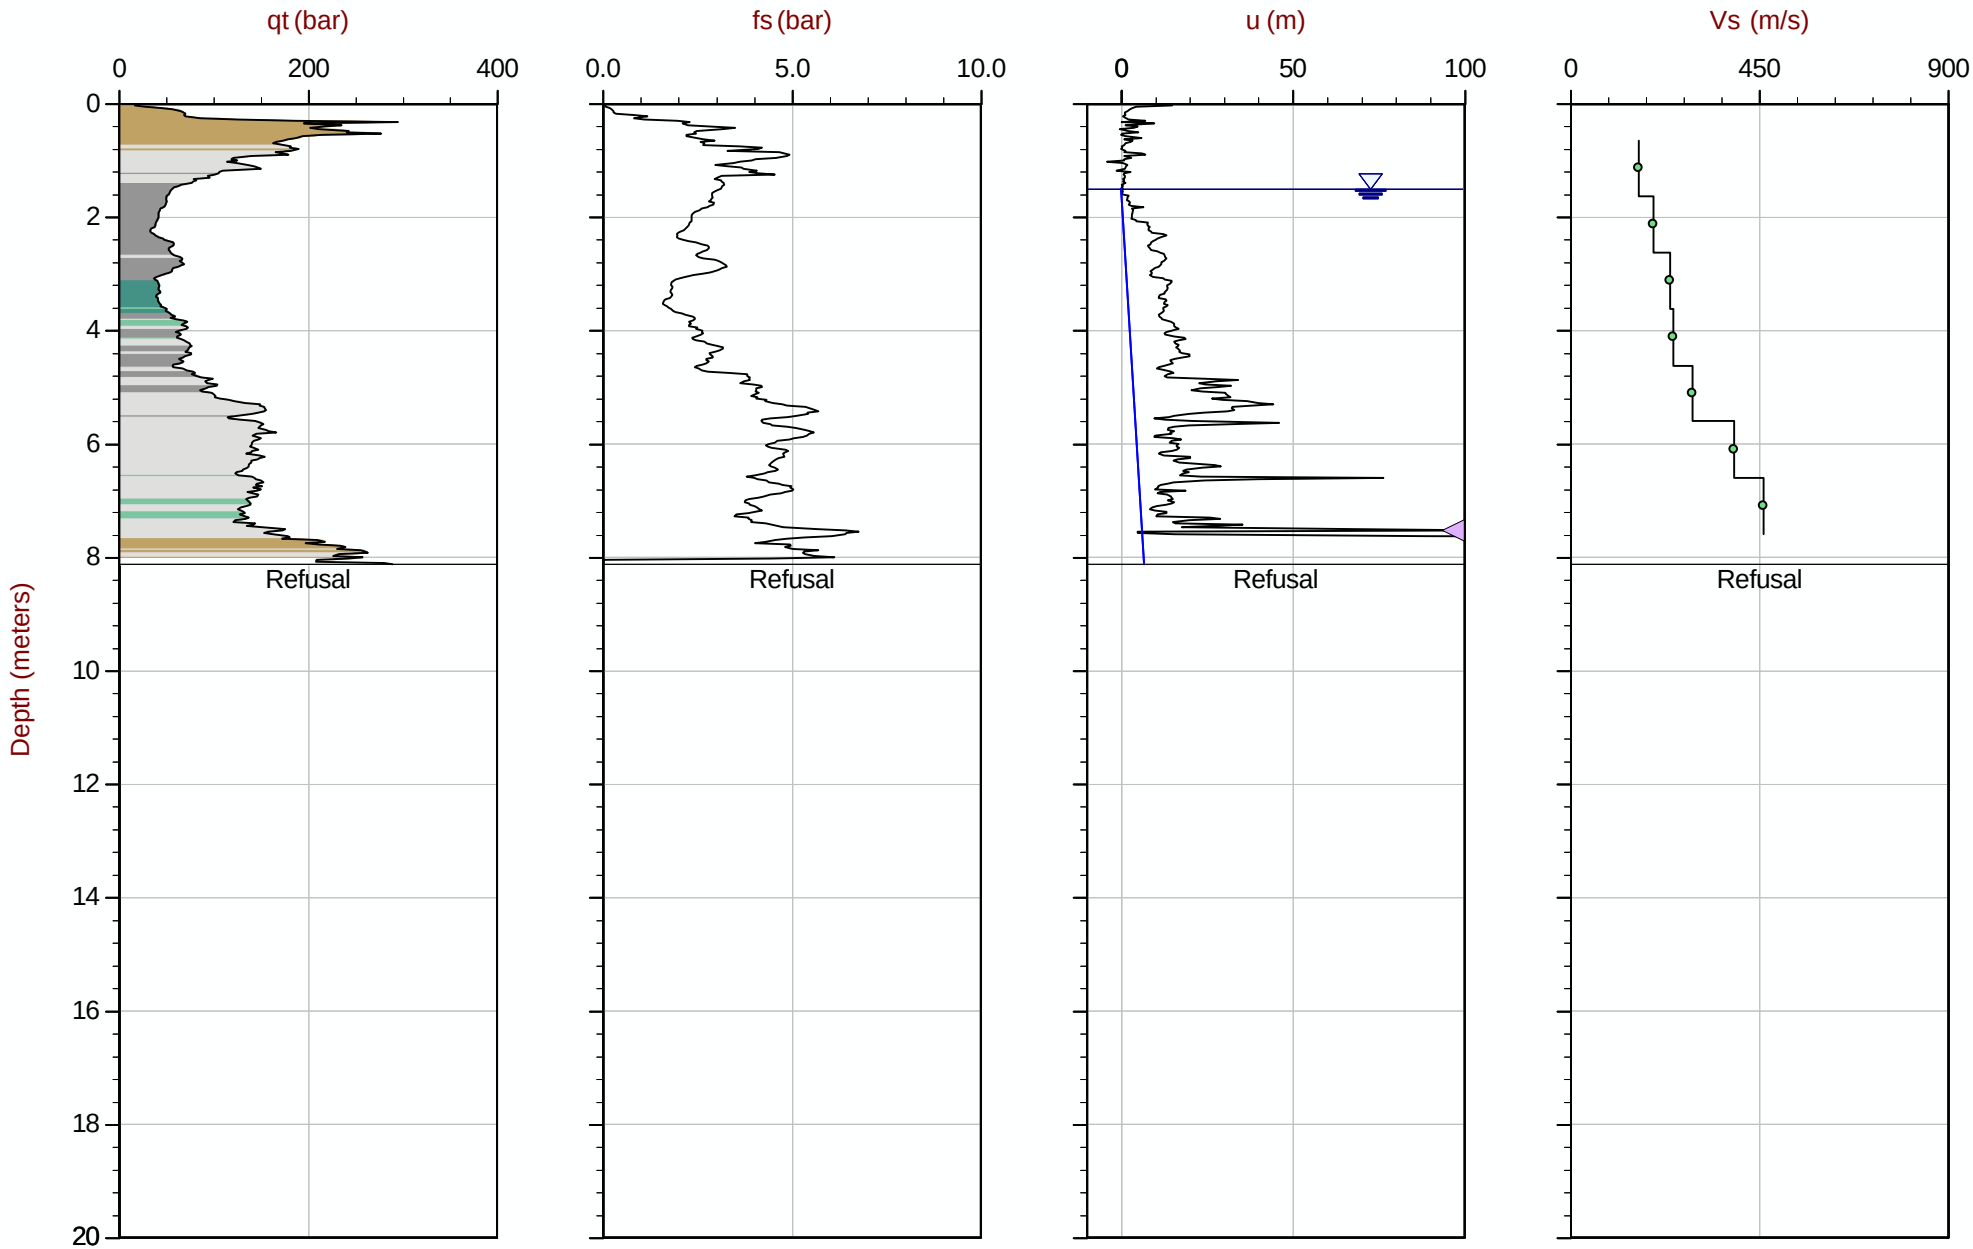

Max Depth: 8.125 m / 26.66 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT256.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609681m E: 416828m Elev: 768.534m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-05 11:25
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT302
Cone: 854:T1500F15U35 Area= 15cm2

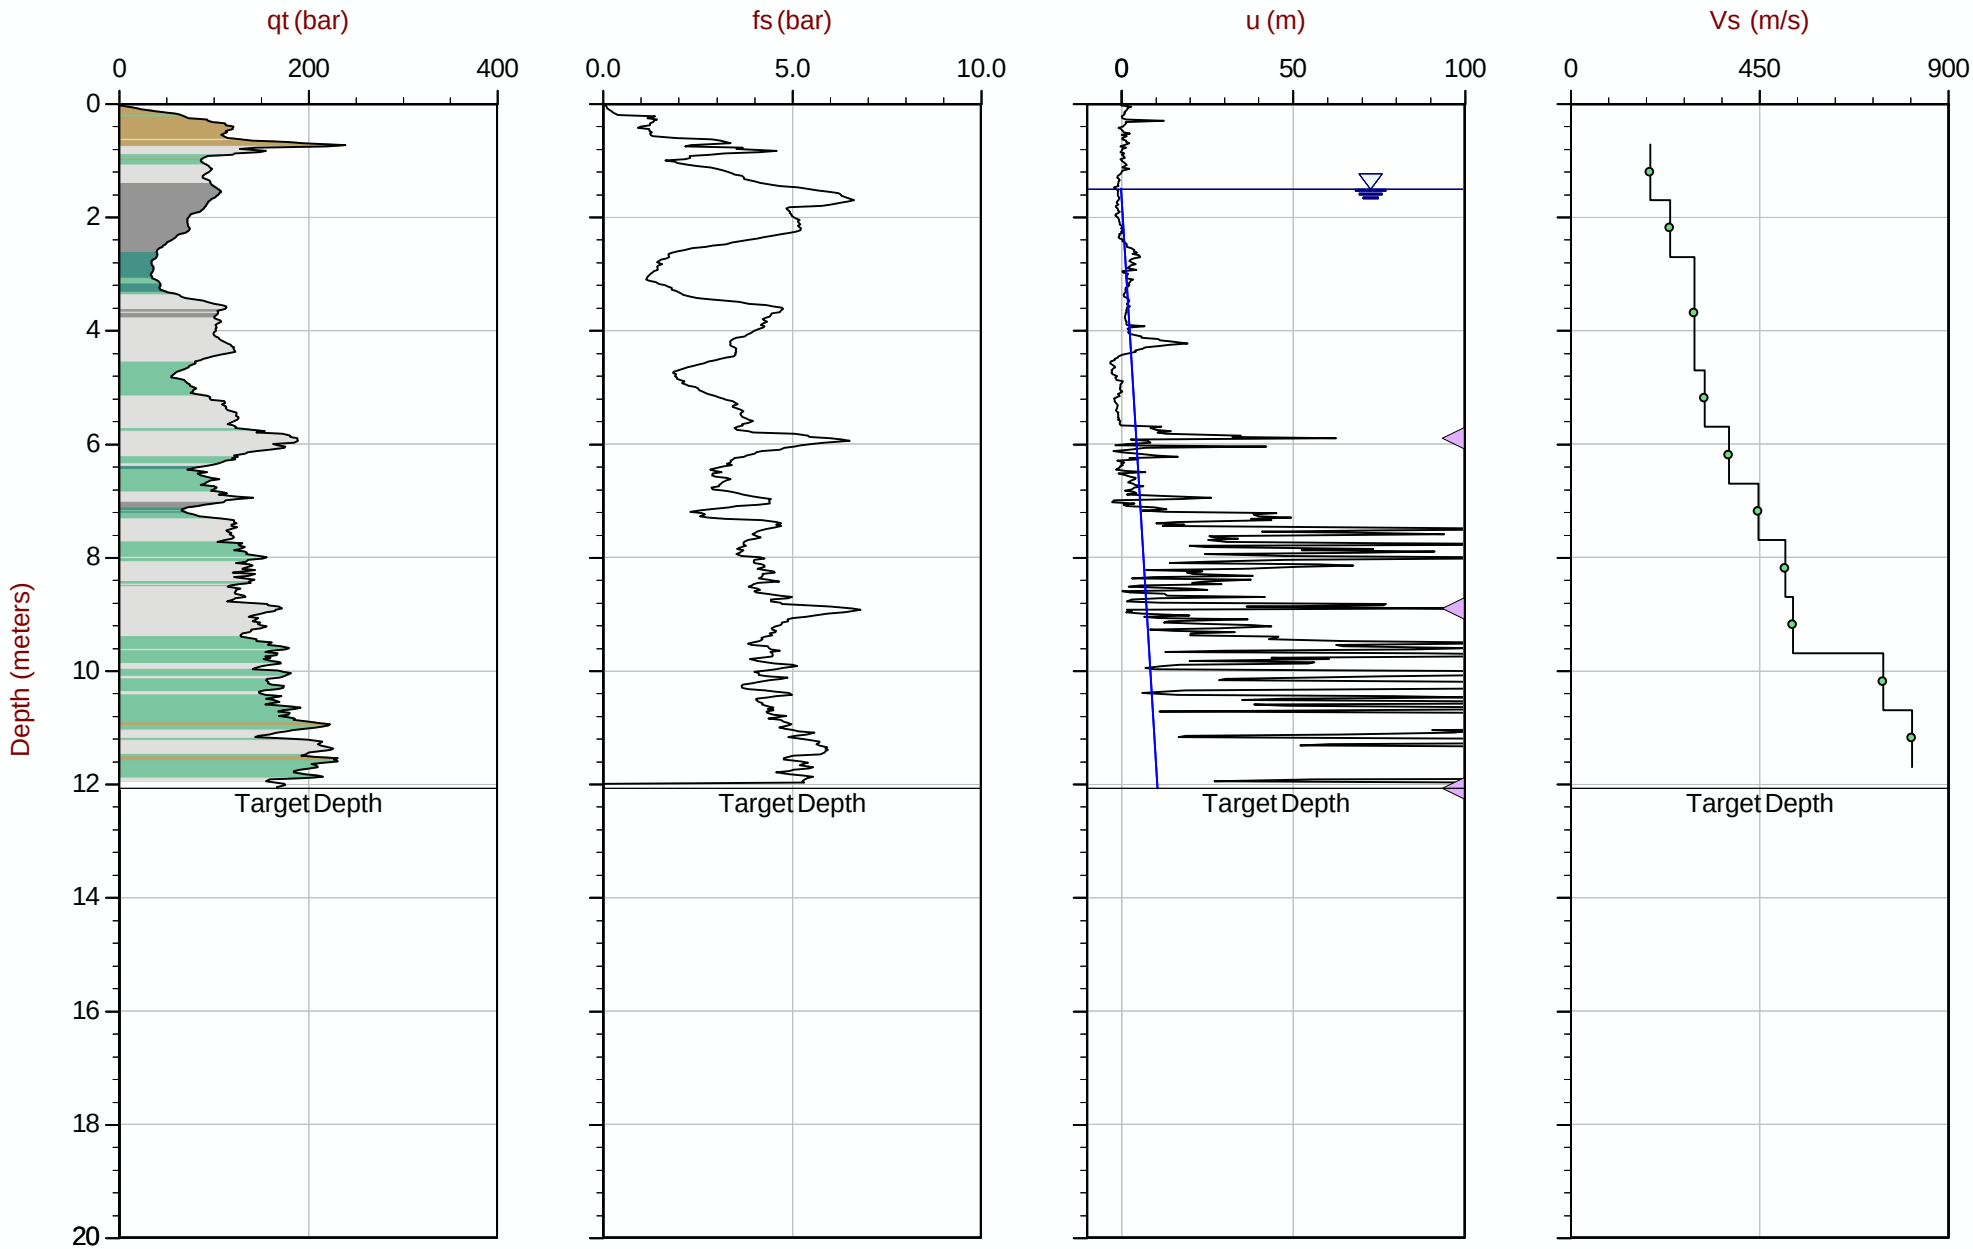

Max Depth: 12.075 m / 39.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT302.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609492m E: 416646m Elev: 769.017m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-06 10:11
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT308
Cone: 854:T1500F15U35 Area= 15cm2

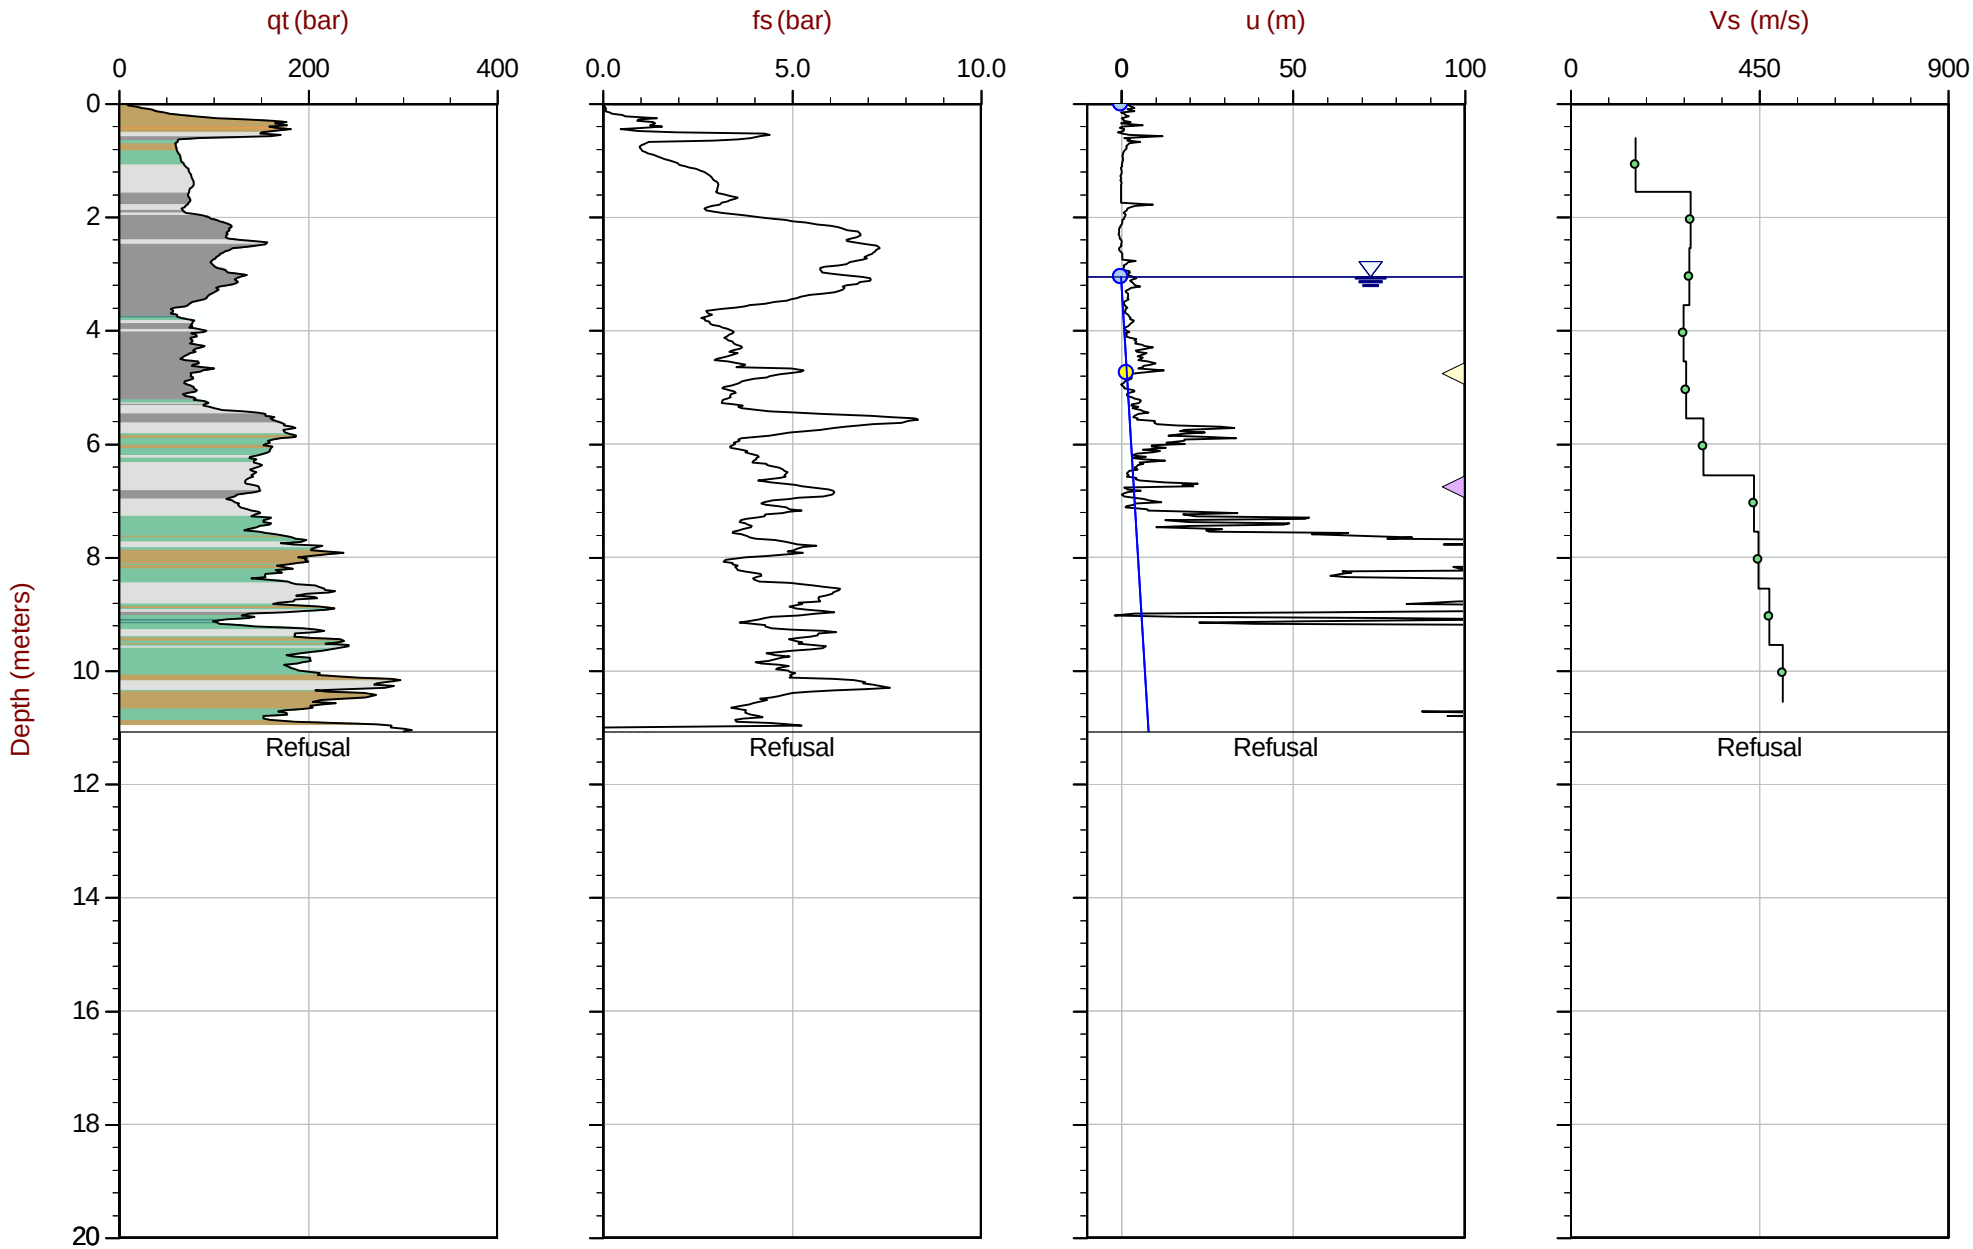

Max Depth: 11.075 m / 36.33 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT308.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609475m E: 416343m Elev: 770.650m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-07 09:56
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT314
Cone: 854:T1500F15U35 Area= 15cm2

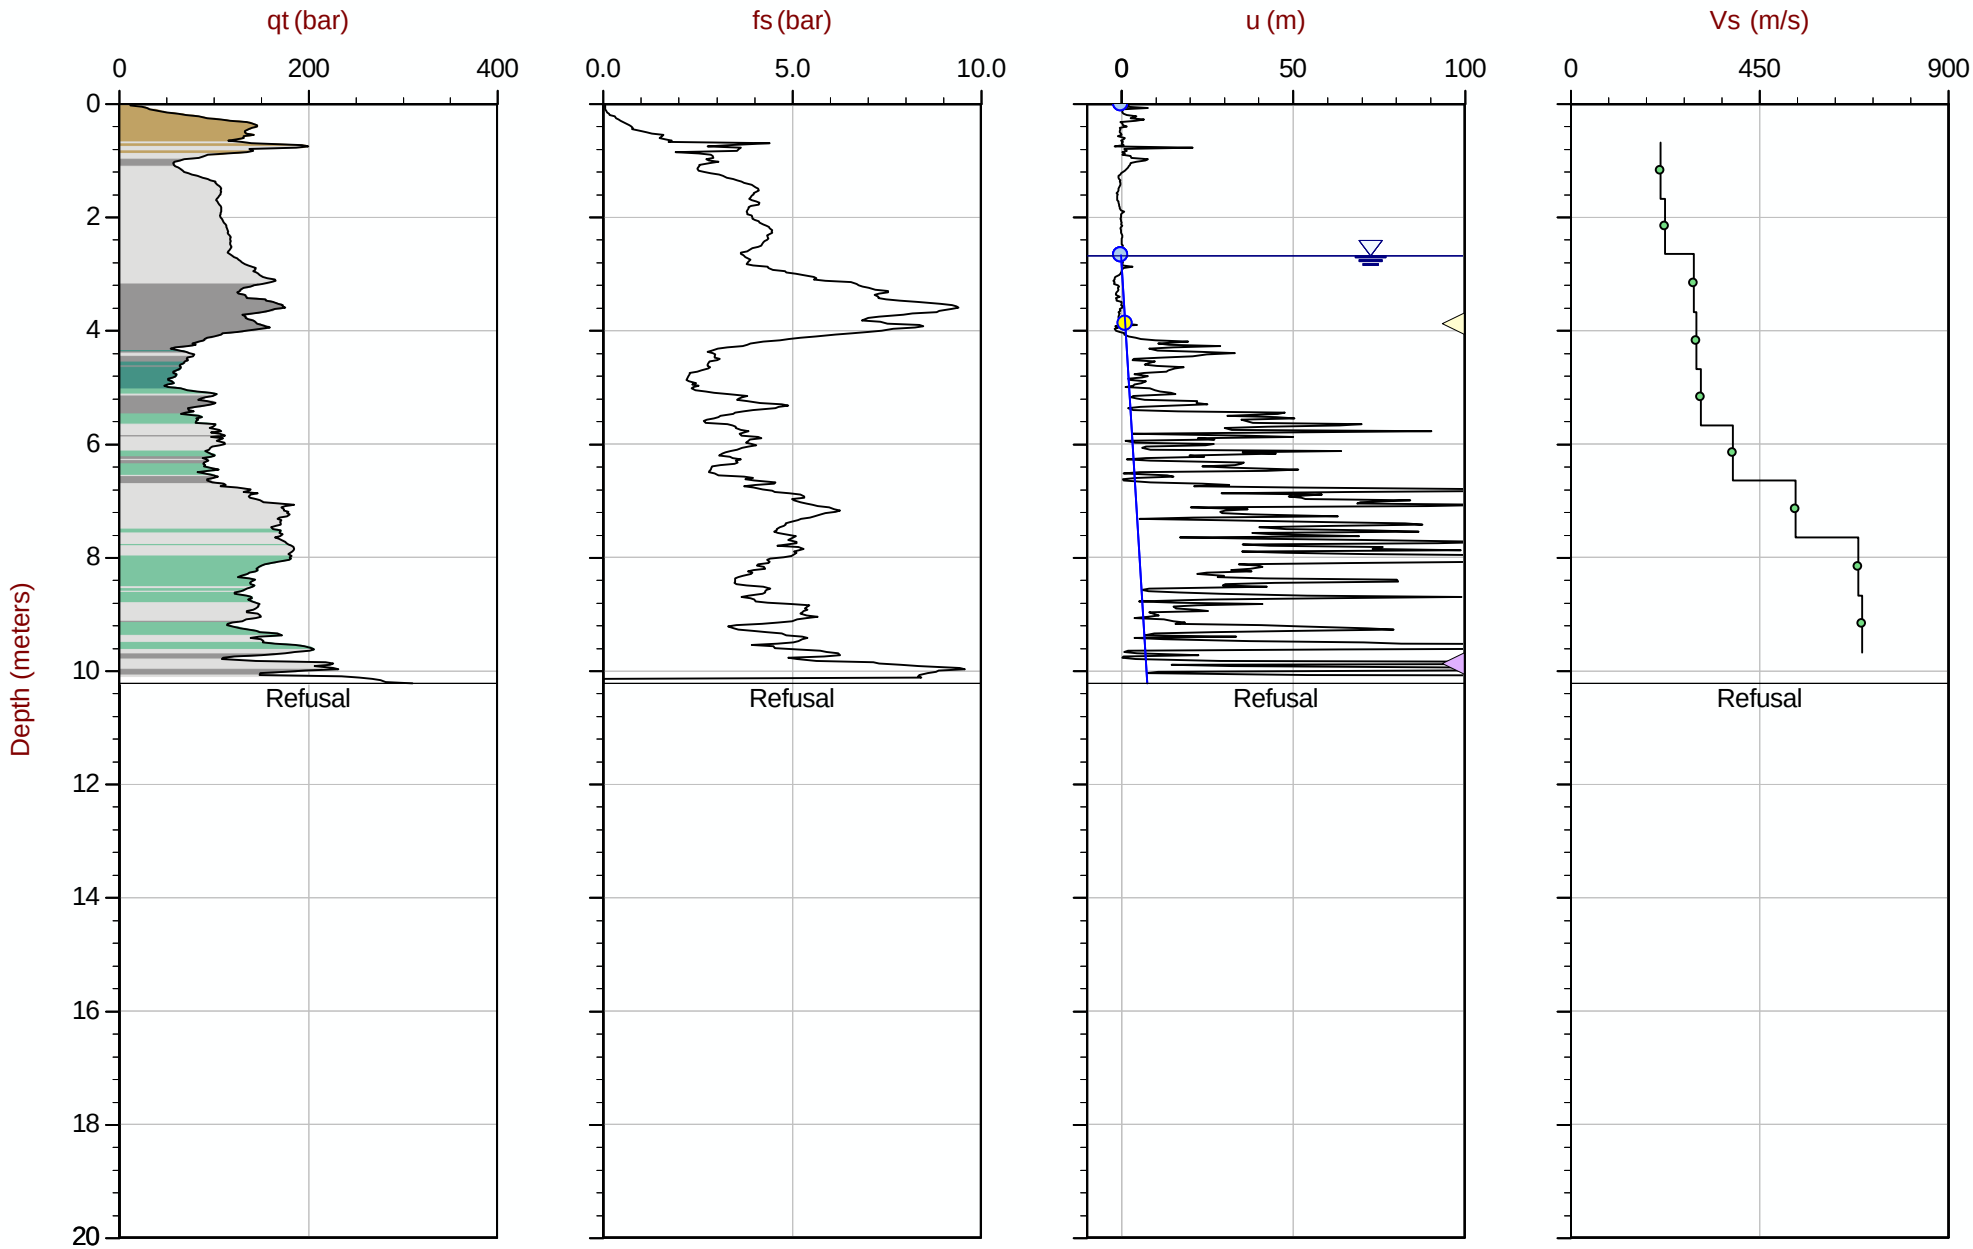

Max Depth: 10.225 m / 33.55 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT314.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609474m E: 416043m Elev: 771.585m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-08 08:23
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT320
Cone: 854:T1500F15U35 Area= 15cm2

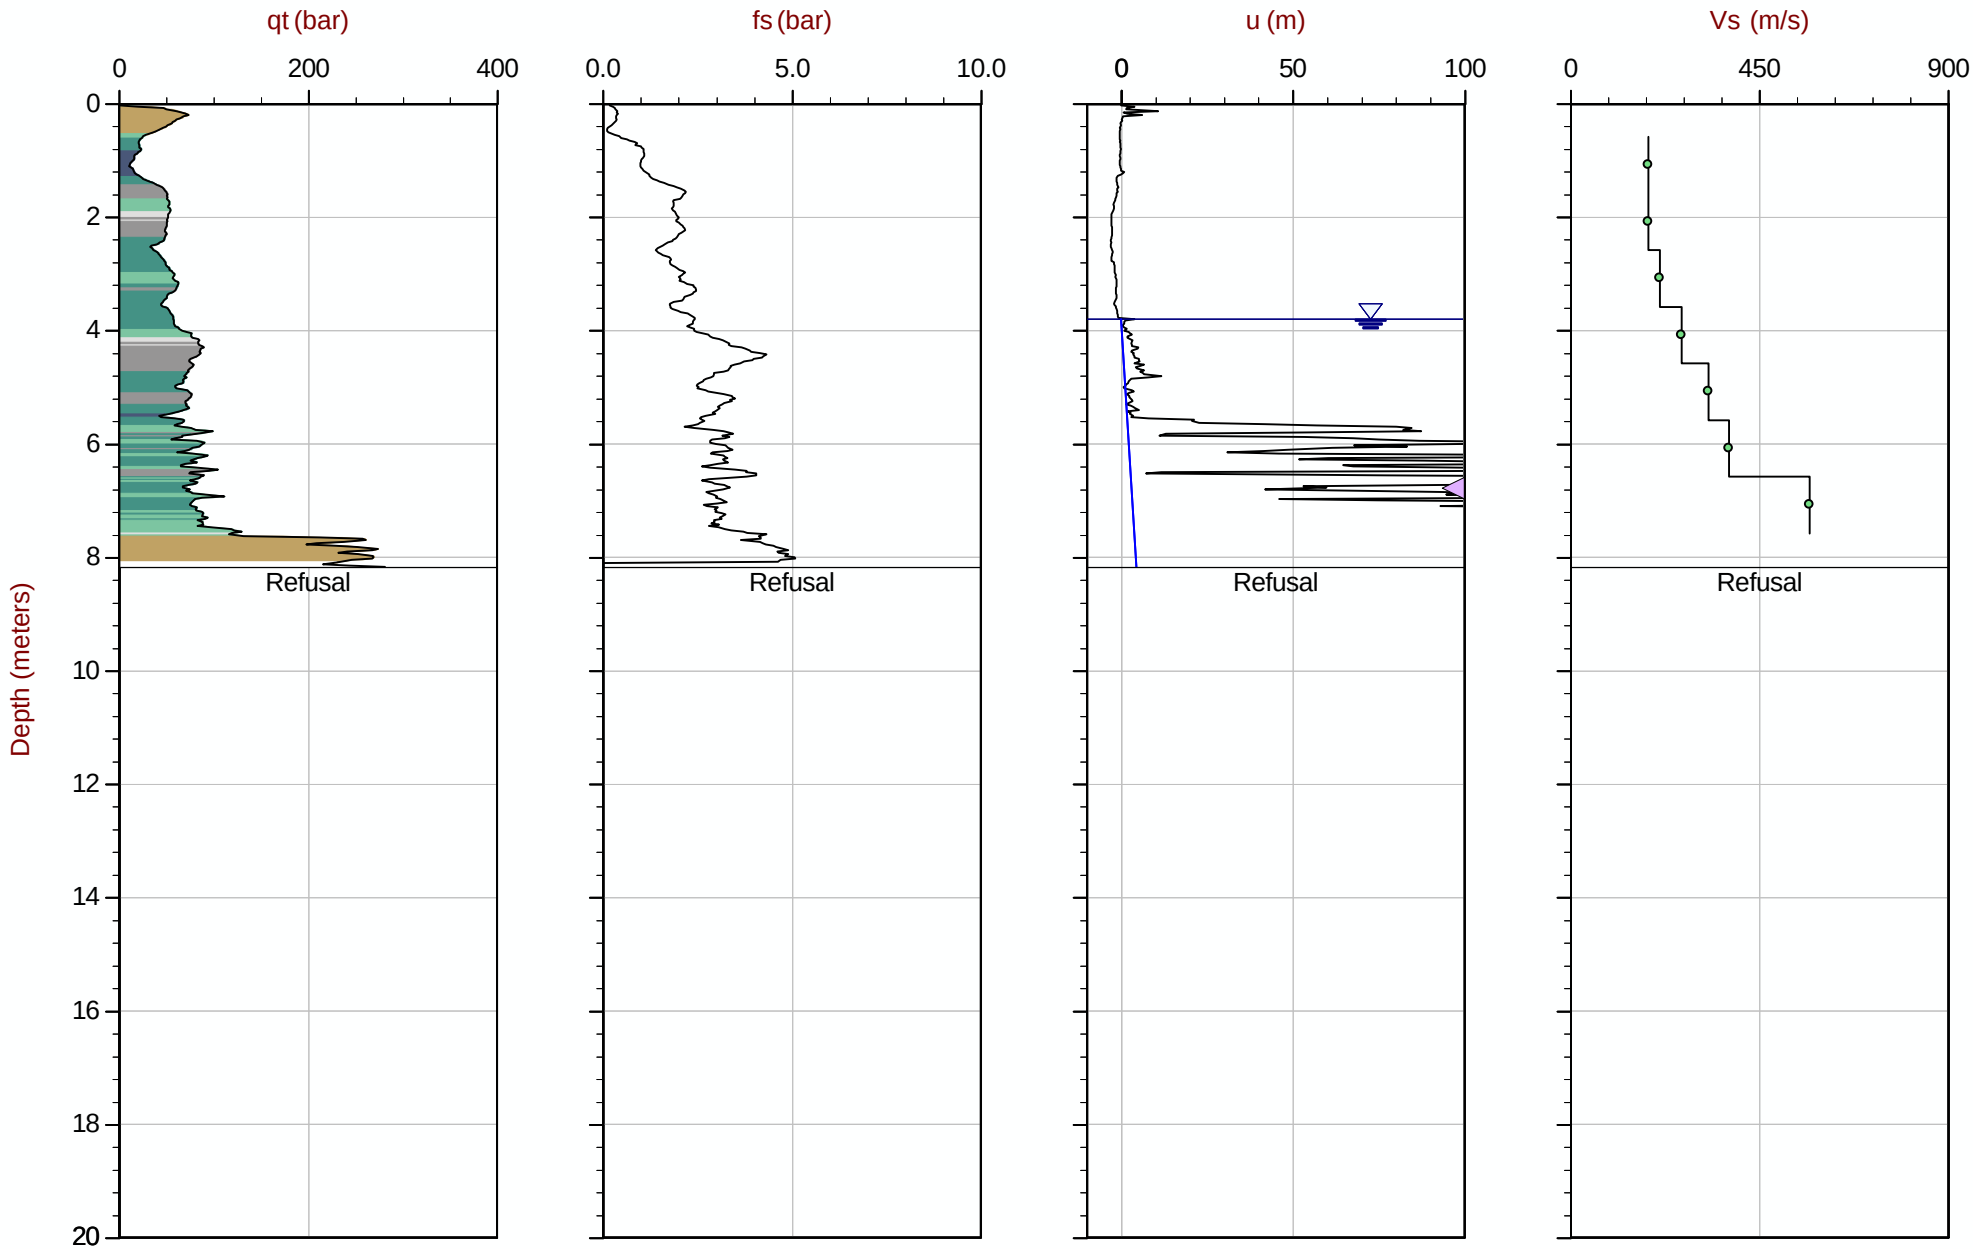

Max Depth: 8.175 m / 26.82 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT320.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609467m E: 415743m Elev: 773.059m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-09 10:28
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT328
Cone: 854:T1500F15U35 Area= 15cm2

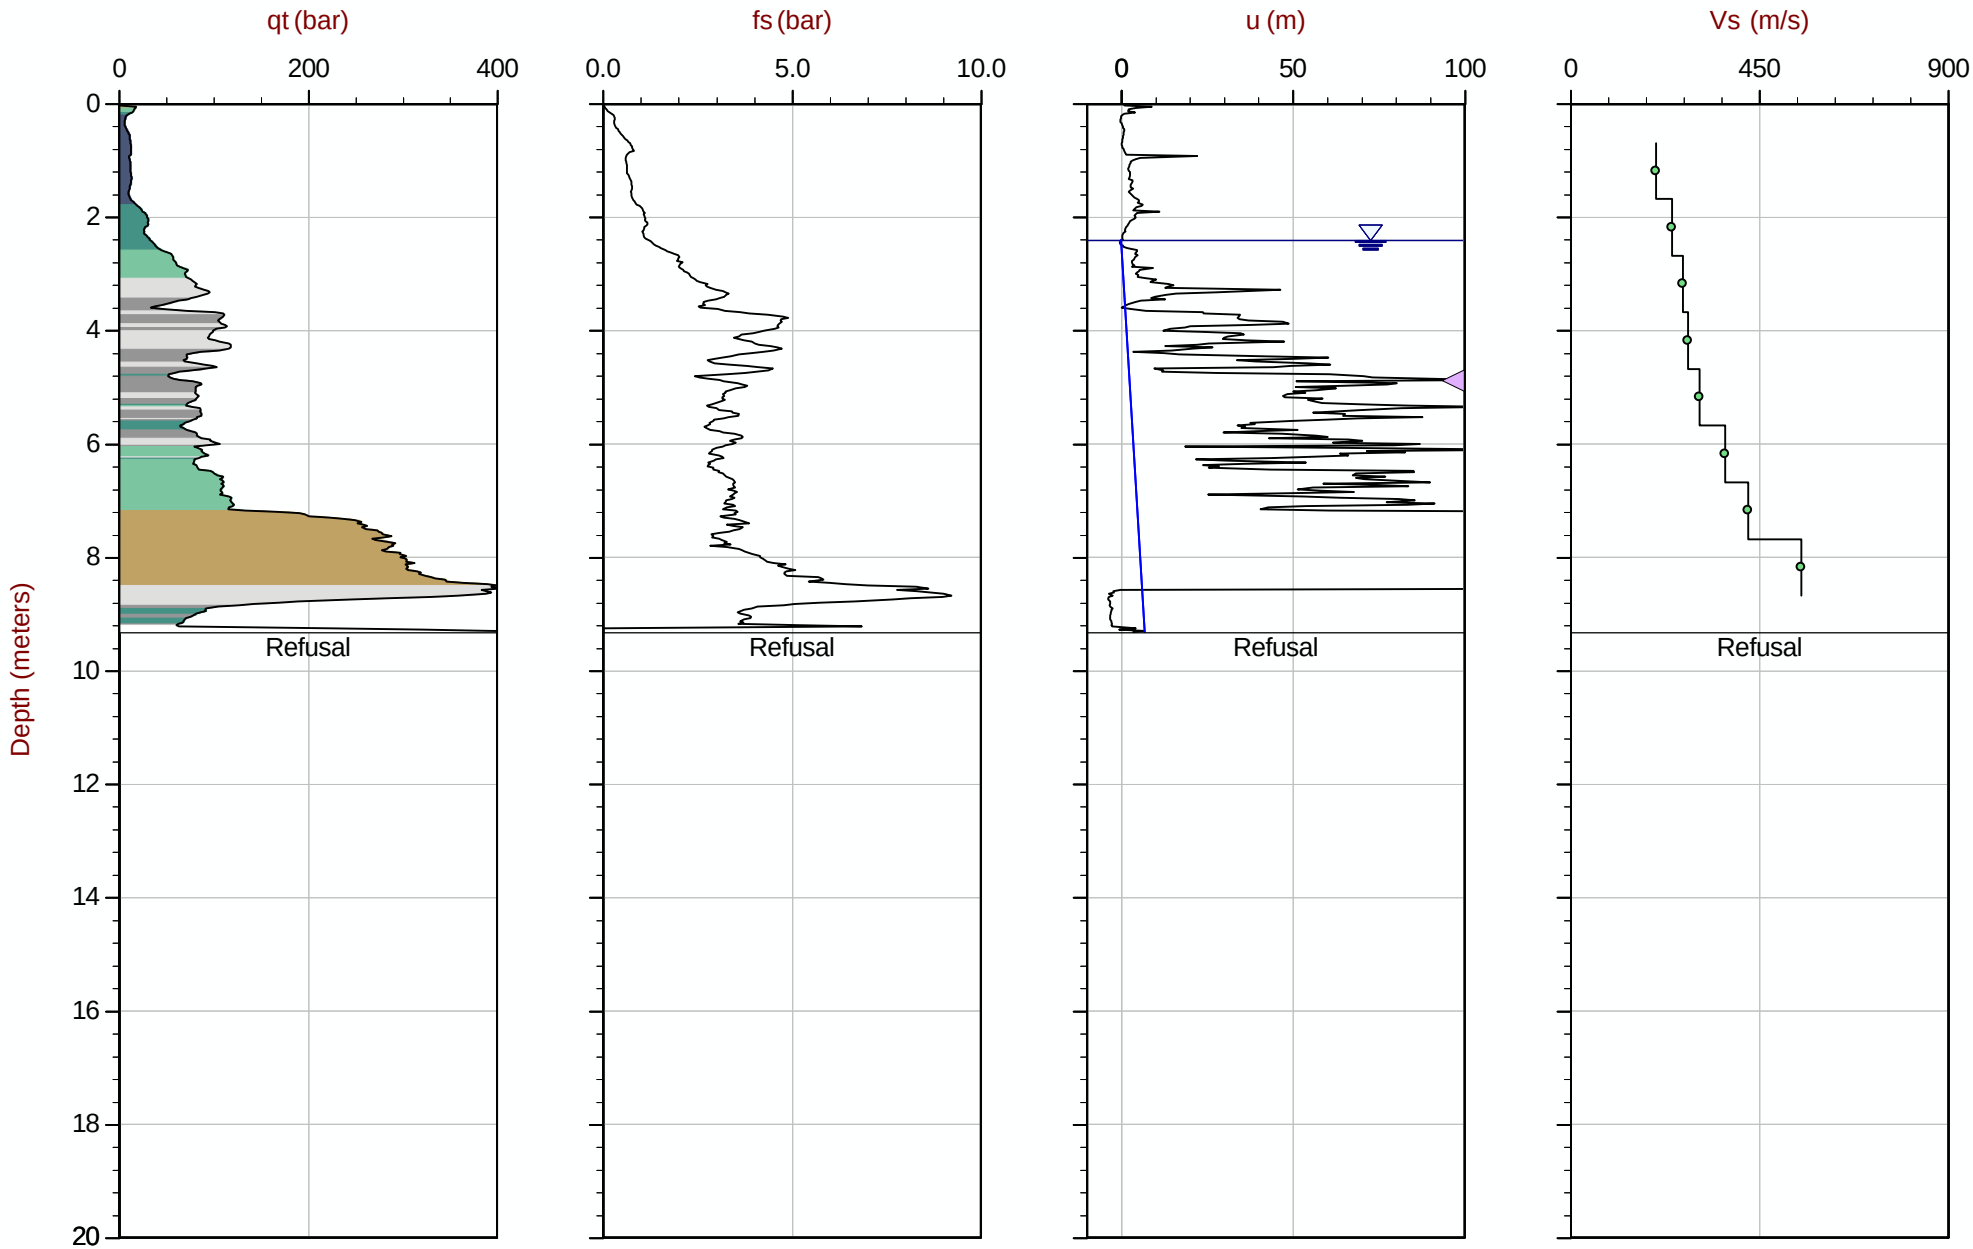

Max Depth: 9.325 m / 30.59 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT328.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609457m E: 415343m Elev: 774.726m
Sheet No: 1 of 1


Overplot Item: Ueq, Assumed Ueq, Dissipation, Ueq achieved, Dissipation, Ueq not achieved, Dissipation, Ueq assumed, Ueq Line, Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-11 10:10
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT334
Cone: 750:T1500F15U35 Area= 15cm2

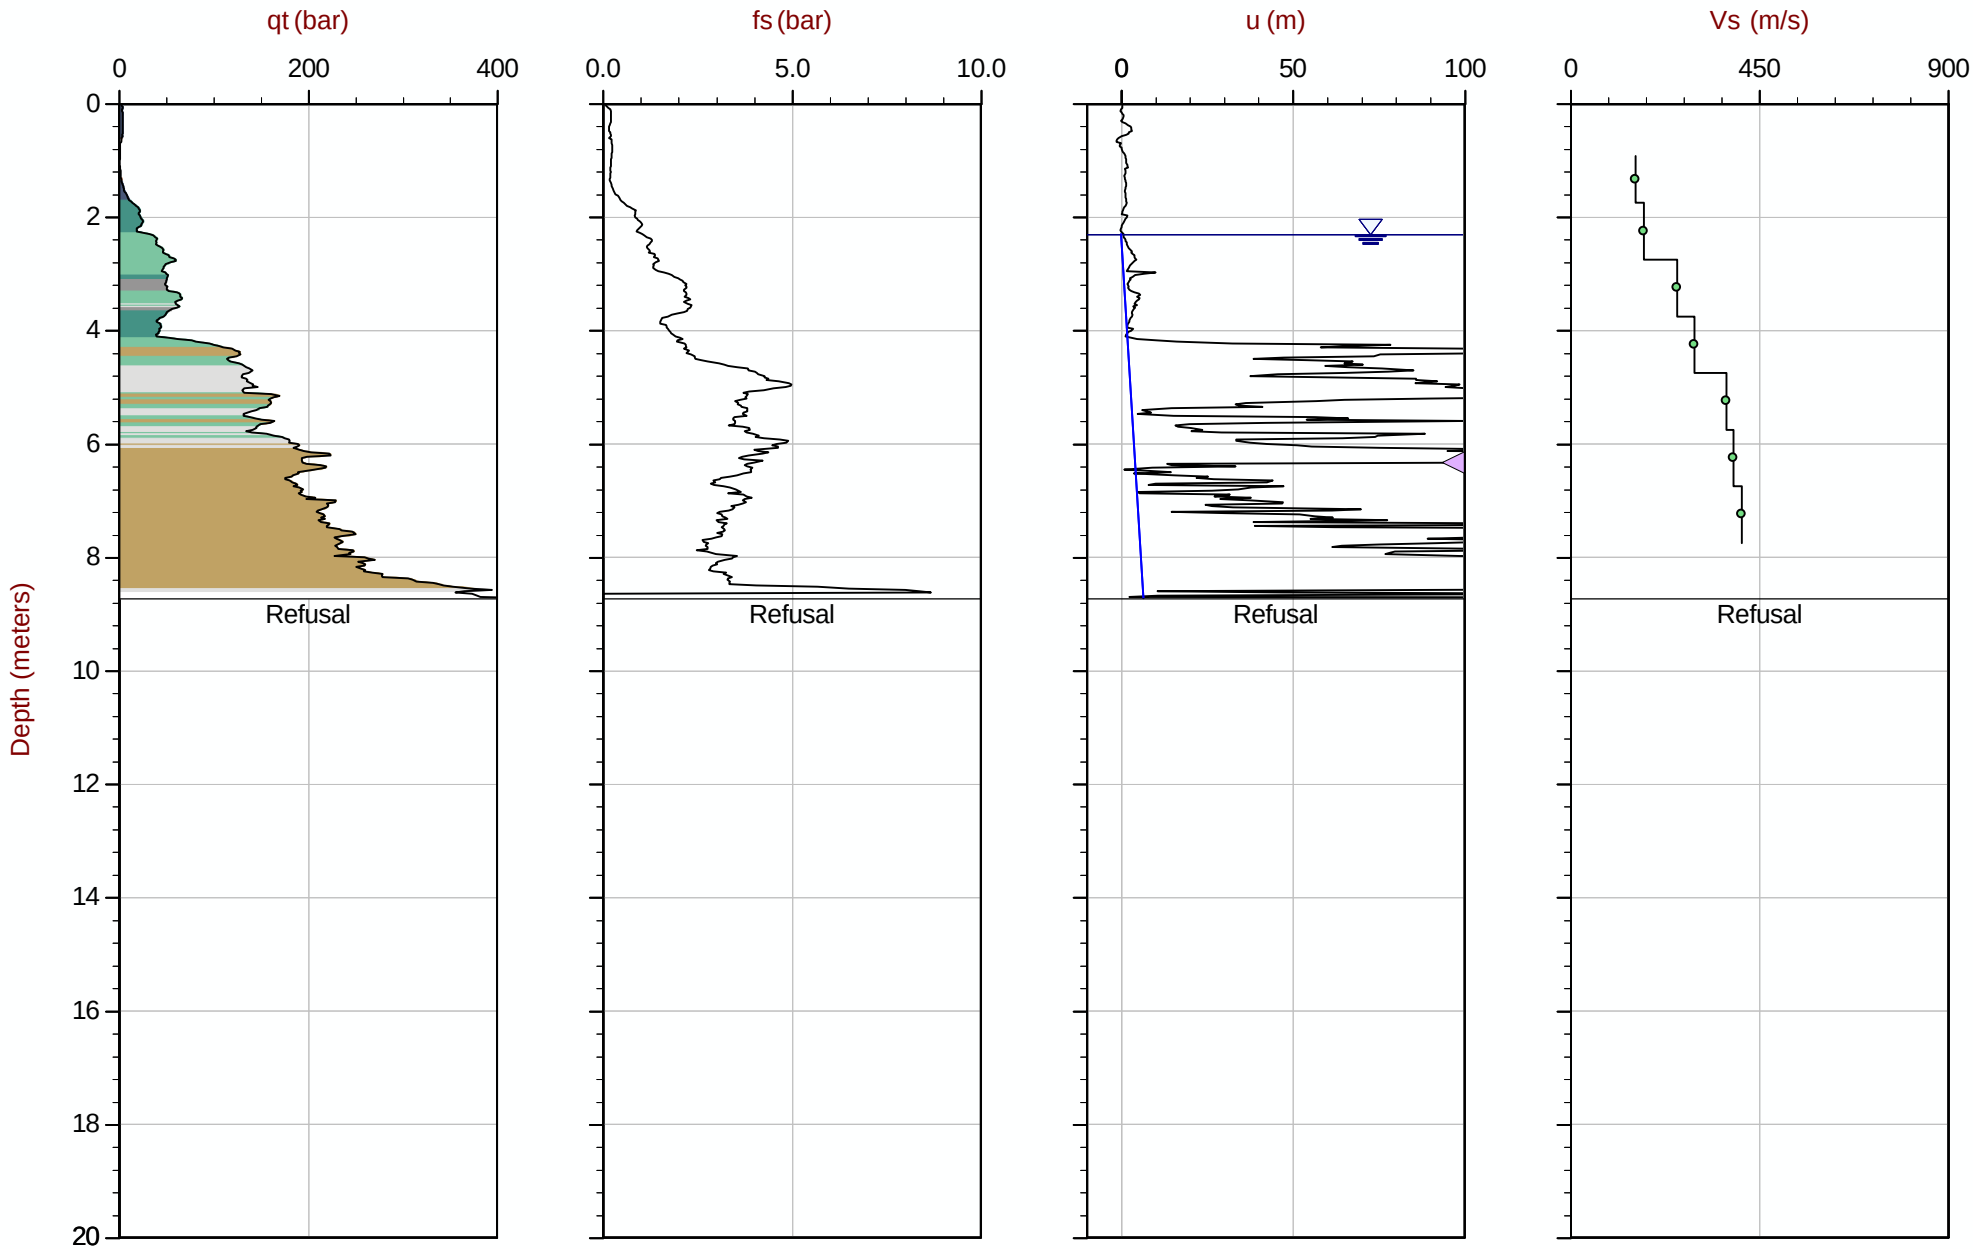

Max Depth: 8.725 m / 28.62 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT334.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609454m E: 415043m Elev: 774.769m
Sheet No: 1 of 1


Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 2022-04-12 08:45
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT339
Cone: 821:T1000F10U35 Area= 15cm2

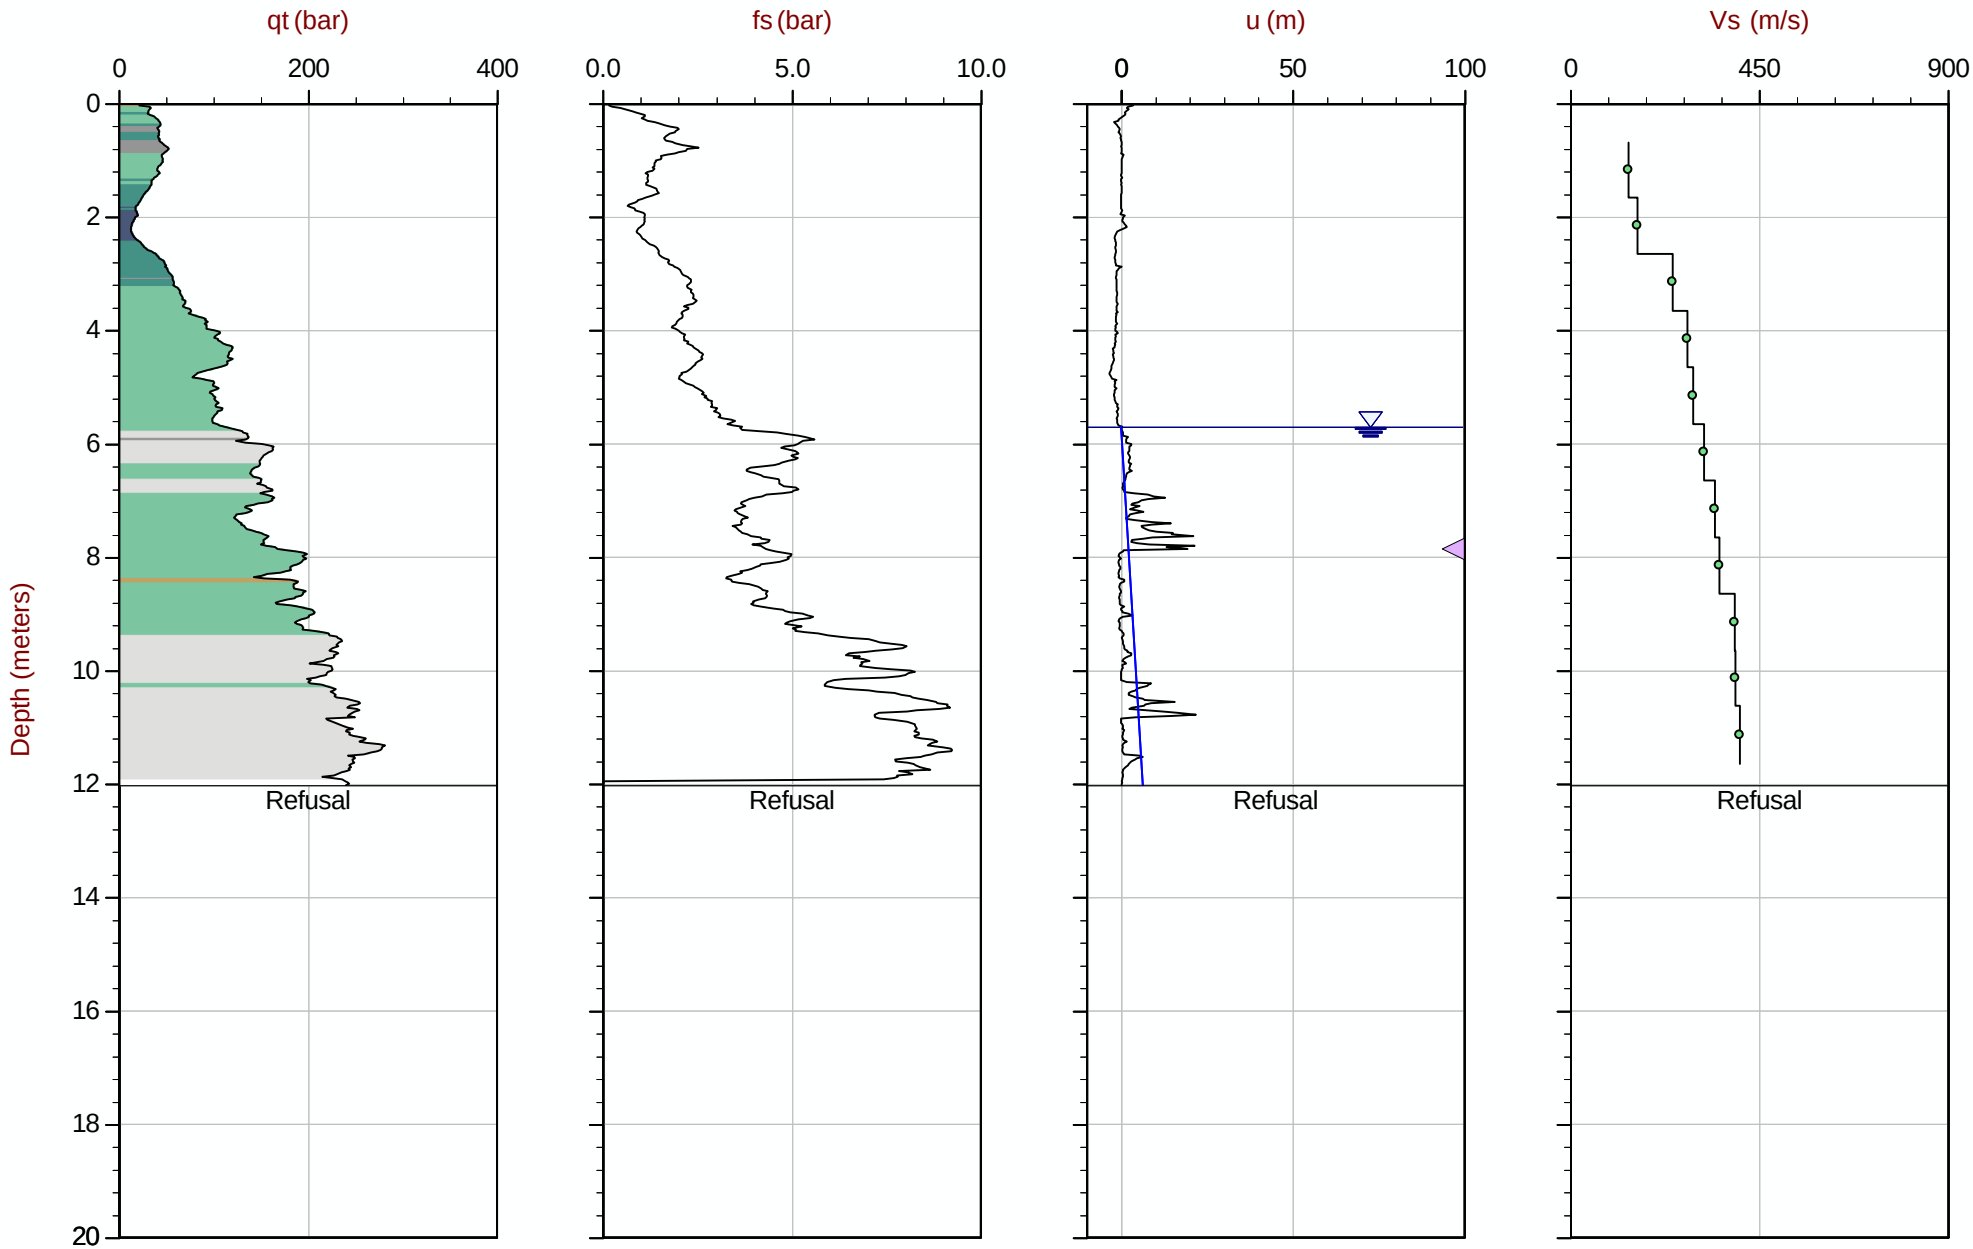

Max Depth: 12.025 m / 39.45 ft
Depth Inc: 0.025 m / 0.082 ft
Avg Int: Every Point

File: 22-02-23796_RS22-22CPT339.COR
Unit Wt: SBTQtn (PKR2009)

SBT: Robertson, 2009 and 2010
Coords: UTM 12N N: 5609451m E: 414743m Elev: 782.132m
Sheet No: 1 of 1

Overplot Item: Ueq | Assumed Ueq | Dissipation, Ueq achieved | Dissipation, Ueq not achieved | Dissipation, Ueq assumed | Ueq Line | Hydrostatic Line

Seismic Cone Penetration Test Shear Wave (Vs) Tabular Results

CONETEC

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT100
Date:	19-Mar-2022

Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.88	0.68	0.98			
1.88	1.68	1.82	0.84	3.33	254
2.88	2.68	2.77	0.95	3.90	243
3.88	3.68	3.75	0.98	4.05	241
4.88	4.68	4.73	0.99	4.63	213
5.88	5.68	5.72	0.99	4.41	225
6.85	6.65	6.69	0.96	3.68	262
7.88	7.68	7.71	1.03	3.72	275
8.88	8.68	8.71	1.00	3.14	318
9.88	9.68	9.71	1.00	2.60	383
10.88	10.68	10.70	1.00	2.56	389
11.88	11.68	11.70	1.00	2.54	394
12.88	12.68	12.70	1.00	2.51	398
13.88	13.68	13.70	1.00	2.47	405
14.88	14.68	14.70	1.00	2.46	407
15.73	15.53	15.55	0.85	2.06	411

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT103
Date:	19-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.88	0.68	0.98			
1.85	1.65	1.79	0.82	3.44	237
2.85	2.65	2.74	0.95	3.75	253
3.85	3.65	3.72	0.98	3.51	278
4.85	4.65	4.70	0.99	3.36	294

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT106
Date:	20-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.82	0.62	0.94			
1.80	1.60	1.75	0.81	4.75	171
2.80	2.60	2.69	0.95	4.53	209
3.80	3.60	3.67	0.97	2.73	357
4.78	4.58	4.63	0.97	2.30	421
5.80	5.60	5.64	1.01	2.34	433
6.78	6.58	6.62	0.97	2.87	340

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT109
Date:	22-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.78	0.58	0.91			
1.78	1.58	1.73	0.82	3.18	258
2.78	2.58	2.67	0.95	3.62	261
3.78	3.58	3.65	0.98	3.76	259
4.75	4.55	4.60	0.96	3.31	289
5.78	5.58	5.62	1.02	3.33	306
6.78	6.58	6.62	0.99	3.06	325
7.78	7.58	7.61	1.00	2.77	359
8.78	8.58	8.61	1.00	2.69	370

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT112
Date:	21-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.78	0.58	0.91			
1.78	1.58	1.73	0.82	4.59	178
2.78	2.58	2.67	0.95	4.30	220
3.78	3.58	3.65	0.98	2.15	454
4.78	4.58	4.63	0.99	2.07	476
5.78	5.58	5.62	0.99	2.28	434

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT115
Date:	15-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.88	0.68	0.98			
1.85	1.65	1.79	0.82	2.20	370
2.85	2.65	2.74	0.95	2.61	364
3.85	3.65	3.72	0.98	2.69	362
4.85	4.65	4.70	0.99	3.07	321
5.85	5.65	5.69	0.99	3.08	322
6.82	6.62	6.66	0.96	2.99	322
7.88	7.68	7.71	1.06	2.90	363
8.85	8.65	8.68	0.97	2.52	383
9.83	9.63	9.66	0.98	1.98	494
10.82	10.62	10.64	0.99	1.98	500
12.02	11.82	11.84	1.20	2.35	509

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT121
Date:	22-Mar-2022

Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.92	0.72	1.00			
1.92	1.72	1.86	0.85	4.04	211
2.92	2.72	2.81	0.95	3.93	242
3.92	3.72	3.79	0.98	2.81	347
4.90	4.70	4.75	0.97	2.44	396
5.93	5.73	5.77	1.02	2.42	422
6.90	6.70	6.74	0.96	2.17	443

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT127
Date:	23-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.88	0.68	0.98			
1.88	1.68	1.82	0.84	4.05	208
2.88	2.68	2.77	0.95	3.55	268
3.88	3.68	3.75	0.98	2.91	335
4.88	4.68	4.73	0.99	3.37	293
5.88	5.68	5.72	0.99	3.33	297
6.88	6.68	6.72	0.99	3.25	306
7.88	7.68	7.71	1.00	2.61	381
8.88	8.68	8.71	1.00	2.19	455
9.85	9.65	9.68	0.97	2.06	469

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT131E
Date:	15-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.88	0.68	0.98			
1.88	1.68	1.82	0.84	6.81	124
2.85	2.65	2.74	0.92	4.36	212
3.85	3.65	3.72	0.98	4.29	228
4.85	4.65	4.70	0.99	3.27	302
5.82	5.62	5.66	0.96	2.89	333
6.88	6.68	6.72	1.05	2.46	428
7.88	7.68	7.71	1.00	2.18	457
8.85	8.65	8.68	0.97	2.06	469

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT131N
Date:	15-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.82	0.62	0.94			
2.15	1.95	2.07	1.14	7.40	154
2.85	2.65	2.74	0.67	3.93	170
3.85	3.65	3.72	0.98	4.65	210
4.85	4.65	4.70	0.99	3.88	254
5.85	5.65	5.69	0.99	2.89	343
6.85	6.65	6.69	0.99	2.52	394
7.82	7.62	7.65	0.97	2.18	443
8.85	8.65	8.68	1.03	2.07	497
9.90	9.70	9.73	1.05	1.70	616

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT131S1
Date:	15-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.82	0.62	0.94			
1.83	1.63	1.77	0.84	5.51	152
2.82	2.62	2.71	0.94	5.64	166
3.82	3.62	3.69	0.98	5.17	189
4.82	4.62	4.67	0.99	3.26	303
5.82	5.62	5.66	0.99	3.05	325
6.82	6.62	6.66	0.99	2.39	416
7.82	7.62	7.65	1.00	2.28	437
8.83	8.63	8.66	1.01	2.25	447

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT131S2
Date:	15-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.82	0.62	0.94			
1.83	1.63	1.77	0.84	6.10	138
2.82	2.62	2.71	0.94	5.77	163
3.82	3.62	3.69	0.98	4.63	211
4.82	4.62	4.67	0.99	3.42	288
5.82	5.62	5.66	0.99	2.25	439
6.82	6.62	6.66	0.99	2.24	445
7.82	7.62	7.65	1.00	2.17	460
8.80	8.60	8.63	0.98	1.98	494
9.83	9.63	9.66	1.03	2.01	510

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT133
Date:	24-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.82	0.62	0.94			
1.83	1.63	1.77	0.84	3.66	229
2.82	2.62	2.71	0.94	4.03	233
3.82	3.62	3.69	0.98	4.06	240
4.82	4.62	4.67	0.99	3.17	311
5.82	5.62	5.66	0.99	3.00	331
6.82	6.62	6.66	0.99	2.75	362
7.80	7.60	7.63	0.98	2.41	405
8.83	8.63	8.66	1.03	2.21	465

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT138
Date:	24-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.90	0.70	0.99			
1.92	1.72	1.86	0.87	4.76	182
2.90	2.70	2.79	0.93	4.56	204
3.90	3.70	3.77	0.98	4.21	232
4.88	4.68	4.73	0.97	3.45	280
5.88	5.68	5.72	0.99	3.37	295
6.90	6.70	6.74	1.01	3.17	320
7.93	7.73	7.76	1.03	2.72	377

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT144
Date:	25-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.92	0.72	1.00			
1.90	1.70	1.84	0.83	5.44	153
2.88	2.68	2.77	0.93	5.02	186
4.90	4.70	4.75	1.98	7.33	271
5.88	5.68	5.72	0.97	3.10	313
6.88	6.68	6.72	0.99	2.78	358
7.88	7.68	7.71	1.00	2.65	375

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT204
Date:	29-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.82	0.62	0.94			
1.83	1.63	1.77	0.84	4.35	193
2.80	2.60	2.69	0.92	4.62	199
3.80	3.60	3.67	0.97	4.38	222
4.80	4.60	4.65	0.99	3.69	268
5.80	5.60	5.64	0.99	3.21	309

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT209
Date:	29-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.90	0.70	0.99			
1.90	1.70	1.84	0.85	5.59	152
2.88	2.68	2.77	0.93	4.05	230
3.92	3.72	3.79	1.02	2.05	495
4.93	4.73	4.78	1.00	1.97	506

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT215
Date:	30-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.80	0.60	0.92			
1.80	1.60	1.75	0.82	6.29	131
2.80	2.60	2.69	0.95	5.06	187
3.80	3.60	3.67	0.97	4.63	210
4.80	4.60	4.65	0.99	4.43	223
5.80	5.60	5.64	0.99	4.16	238

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT221
Date:	30-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.78	0.58	0.91			
1.78	1.58	1.73	0.82	4.28	191
2.75	2.55	2.64	0.92	5.49	167
3.75	3.55	3.62	0.97	3.97	246
4.75	4.55	4.60	0.99	3.16	312
5.75	5.55	5.59	0.99	2.54	389
6.72	6.52	6.56	0.96	2.19	440
7.72	7.52	7.55	1.00	1.90	525
8.72	8.52	8.55	1.00	1.52	656

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT227
Date:	31-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.70	0.50	0.86			
1.72	1.52	1.67	0.81	4.51	180
2.70	2.50	2.60	0.92	5.17	179
3.72	3.52	3.59	0.99	4.09	243
4.73	4.53	4.58	1.00	3.79	263
5.70	5.50	5.54	0.96	3.14	306
6.70	6.50	6.54	0.99	2.07	481
7.70	7.50	7.53	1.00	1.57	634
8.72	8.52	8.55	1.02	1.27	800

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT233
Date:	26-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.92	0.72	1.00			
1.92	1.72	1.86	0.85	5.96	143
2.92	2.72	2.81	0.95	5.00	190
3.92	3.72	3.79	0.98	3.18	307
4.93	4.73	4.78	1.00	2.39	418
5.93	5.73	5.77	0.99	1.79	553
6.93	6.73	6.77	0.99	1.57	634
7.93	7.73	7.76	1.00	1.31	761
8.90	8.70	8.73	0.97	1.15	838

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT239
Date:	27-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.98	0.78	1.05			
1.90	1.70	1.84	0.79	7.28	109
2.90	2.70	2.79	0.95	5.82	163
3.92	3.72	3.79	1.00	3.51	284
4.90	4.70	4.75	0.97	2.60	373
5.93	5.73	5.77	1.02	2.67	382
6.90	6.70	6.74	0.96	2.15	448
7.93	7.73	7.76	1.03	2.28	451
8.90	8.70	8.73	0.97	1.89	512
9.90	9.70	9.73	1.00	1.67	597
10.90	10.70	10.72	1.00	1.43	699
12.02	11.82	11.84	1.12	1.48	757

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT245
Date:	27-Mar-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.78	0.58	0.91			
1.70	1.50	1.66	0.75	6.06	123
2.72	2.52	2.62	0.96	7.23	133
3.72	3.52	3.59	0.97	5.46	178
4.70	4.50	4.55	0.97	4.98	194
5.70	5.50	5.54	0.99	3.87	256
6.70	6.50	6.54	0.99	3.72	267
7.72	7.52	7.55	1.02	3.42	297
8.70	8.50	8.53	0.98	3.27	298
9.70	9.50	9.53	1.00	3.26	306
10.73	10.53	10.55	1.03	3.05	337

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT252
Date:	02-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
1.83	1.63	1.77			
2.80	2.60	2.69	0.92	4.78	192
3.82	3.62	3.69	0.99	4.26	233
4.80	4.60	4.65	0.97	2.71	356
5.80	5.60	5.64	0.99	2.02	491
6.82	6.62	6.66	1.01	1.84	551
7.82	7.62	7.65	1.00	1.70	584
8.90	8.70	8.73	1.08	1.82	592
9.83	9.63	9.66	0.93	1.53	608

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT256
Date:	04-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.85	0.65	0.96			
1.83	1.63	1.77	0.82	5.03	163
2.82	2.62	2.71	0.94	4.74	198
3.82	3.62	3.69	0.98	4.12	237
4.82	4.62	4.67	0.99	4.02	246
5.80	5.60	5.64	0.97	3.34	291
6.80	6.60	6.64	0.99	2.55	389
7.80	7.60	7.63	1.00	2.16	460

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT302
Date:	05-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.92	0.72	1.00			
1.90	1.70	1.84	0.83	4.40	190
2.90	2.70	2.79	0.95	4.02	237
4.90	4.70	4.75	1.96	6.65	295
5.90	5.70	5.74	0.99	3.11	319
6.90	6.70	6.74	0.99	2.63	378
7.90	7.70	7.73	1.00	2.22	448
8.90	8.70	8.73	1.00	1.94	513
9.90	9.70	9.73	1.00	1.88	530
10.90	10.70	10.72	1.00	1.34	745
11.90	11.70	11.72	1.00	1.23	813

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT308
Date:	06-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.80	0.60	0.92			
1.75	1.55	1.70	0.78	5.01	156
2.75	2.55	2.64	0.94	3.30	286
3.75	3.55	3.62	0.97	3.43	284
4.75	4.55	4.60	0.99	3.66	269
5.75	5.55	5.59	0.99	3.60	275
6.75	6.55	6.59	0.99	3.14	316
7.75	7.55	7.58	1.00	2.27	438
8.75	8.55	8.58	1.00	2.23	448
9.75	9.55	9.58	1.00	2.11	474
10.75	10.55	10.57	1.00	1.97	505

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT314
Date:	07-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.88	0.68	0.98			
1.88	1.68	1.82	0.84	3.94	215
2.85	2.65	2.74	0.92	4.08	226
3.88	3.68	3.75	1.01	3.43	293
4.88	4.68	4.73	0.99	3.28	300
5.88	5.68	5.72	0.99	3.19	311
6.85	6.65	6.69	0.96	2.50	386
7.85	7.65	7.68	1.00	1.86	536
8.88	8.68	8.71	1.03	1.50	686
9.88	9.68	9.71	1.00	1.43	696

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT320
Date:	08-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.78	0.58	0.91			
1.78	1.58	1.73	0.82	4.41	186
2.78	2.58	2.67	0.95	5.09	186
3.78	3.58	3.65	0.98	4.57	214
4.78	4.58	4.63	0.99	3.72	265
5.78	5.58	5.62	0.99	3.02	328
6.78	6.58	6.62	0.99	2.64	377
7.78	7.58	7.61	1.00	1.75	570

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT328
Date:	09-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.90	0.70	0.99			
1.88	1.68	1.82	0.83	4.09	203
2.88	2.68	2.77	0.95	3.92	242
3.88	3.68	3.75	0.98	3.66	267
4.88	4.68	4.73	0.99	3.53	279
5.88	5.68	5.72	0.99	3.22	308
6.88	6.68	6.72	0.99	2.69	369
7.88	7.68	7.71	1.00	2.35	424
8.88	8.68	8.71	1.00	1.81	551

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT334
Date:	11-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20

SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
1.12	0.92	1.16			
1.95	1.75	1.89	0.73	4.69	155
2.95	2.75	2.84	0.95	5.44	175
3.95	3.75	3.82	0.98	3.85	254
4.95	4.75	4.80	0.99	3.34	295
5.95	5.75	5.79	0.99	2.67	371
6.95	6.75	6.79	0.99	2.56	389
7.95	7.75	7.78	1.00	2.44	408

Job No:	22-02-23796
Client:	MPE Engineering
Project:	Snake Lake Dam Alignment
Sounding ID:	RSCPT22-22CPT339
Date:	12-Apr-2022
Seismic Source:	Beam
Seismic Offset (m):	0.70
Source Depth (m):	0.00
Geophone Offset (m):	0.20


SCPTu SHEAR WAVE VELOCITY TEST RESULTS - Vs

Tip Depth (m)	Geophone Depth (m)	Ray Path (m)	Ray Path Difference (m)	Travel Time Interval (ms)	Interval Velocity (m/s)
0.88	0.68	0.98			
1.85	1.65	1.79	0.82	5.93	138
2.85	2.65	2.74	0.95	5.96	159
3.85	3.65	3.72	0.98	4.02	243
4.85	4.65	4.70	0.99	3.55	278
5.85	5.65	5.69	0.99	3.39	292
6.85	6.65	6.69	0.99	3.13	318
7.85	7.65	7.68	1.00	2.89	344
8.85	8.65	8.68	1.00	2.81	355
9.85	9.65	9.68	1.00	2.55	392
10.82	10.62	10.64	0.97	2.46	394
11.85	11.65	11.67	1.03	2.55	404


Seismic Cone Penetration Test Shear Wave (Vs) Traces

CONETEC


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT100 Filter: 0-100 Hz
Date: 19-Mar-2022

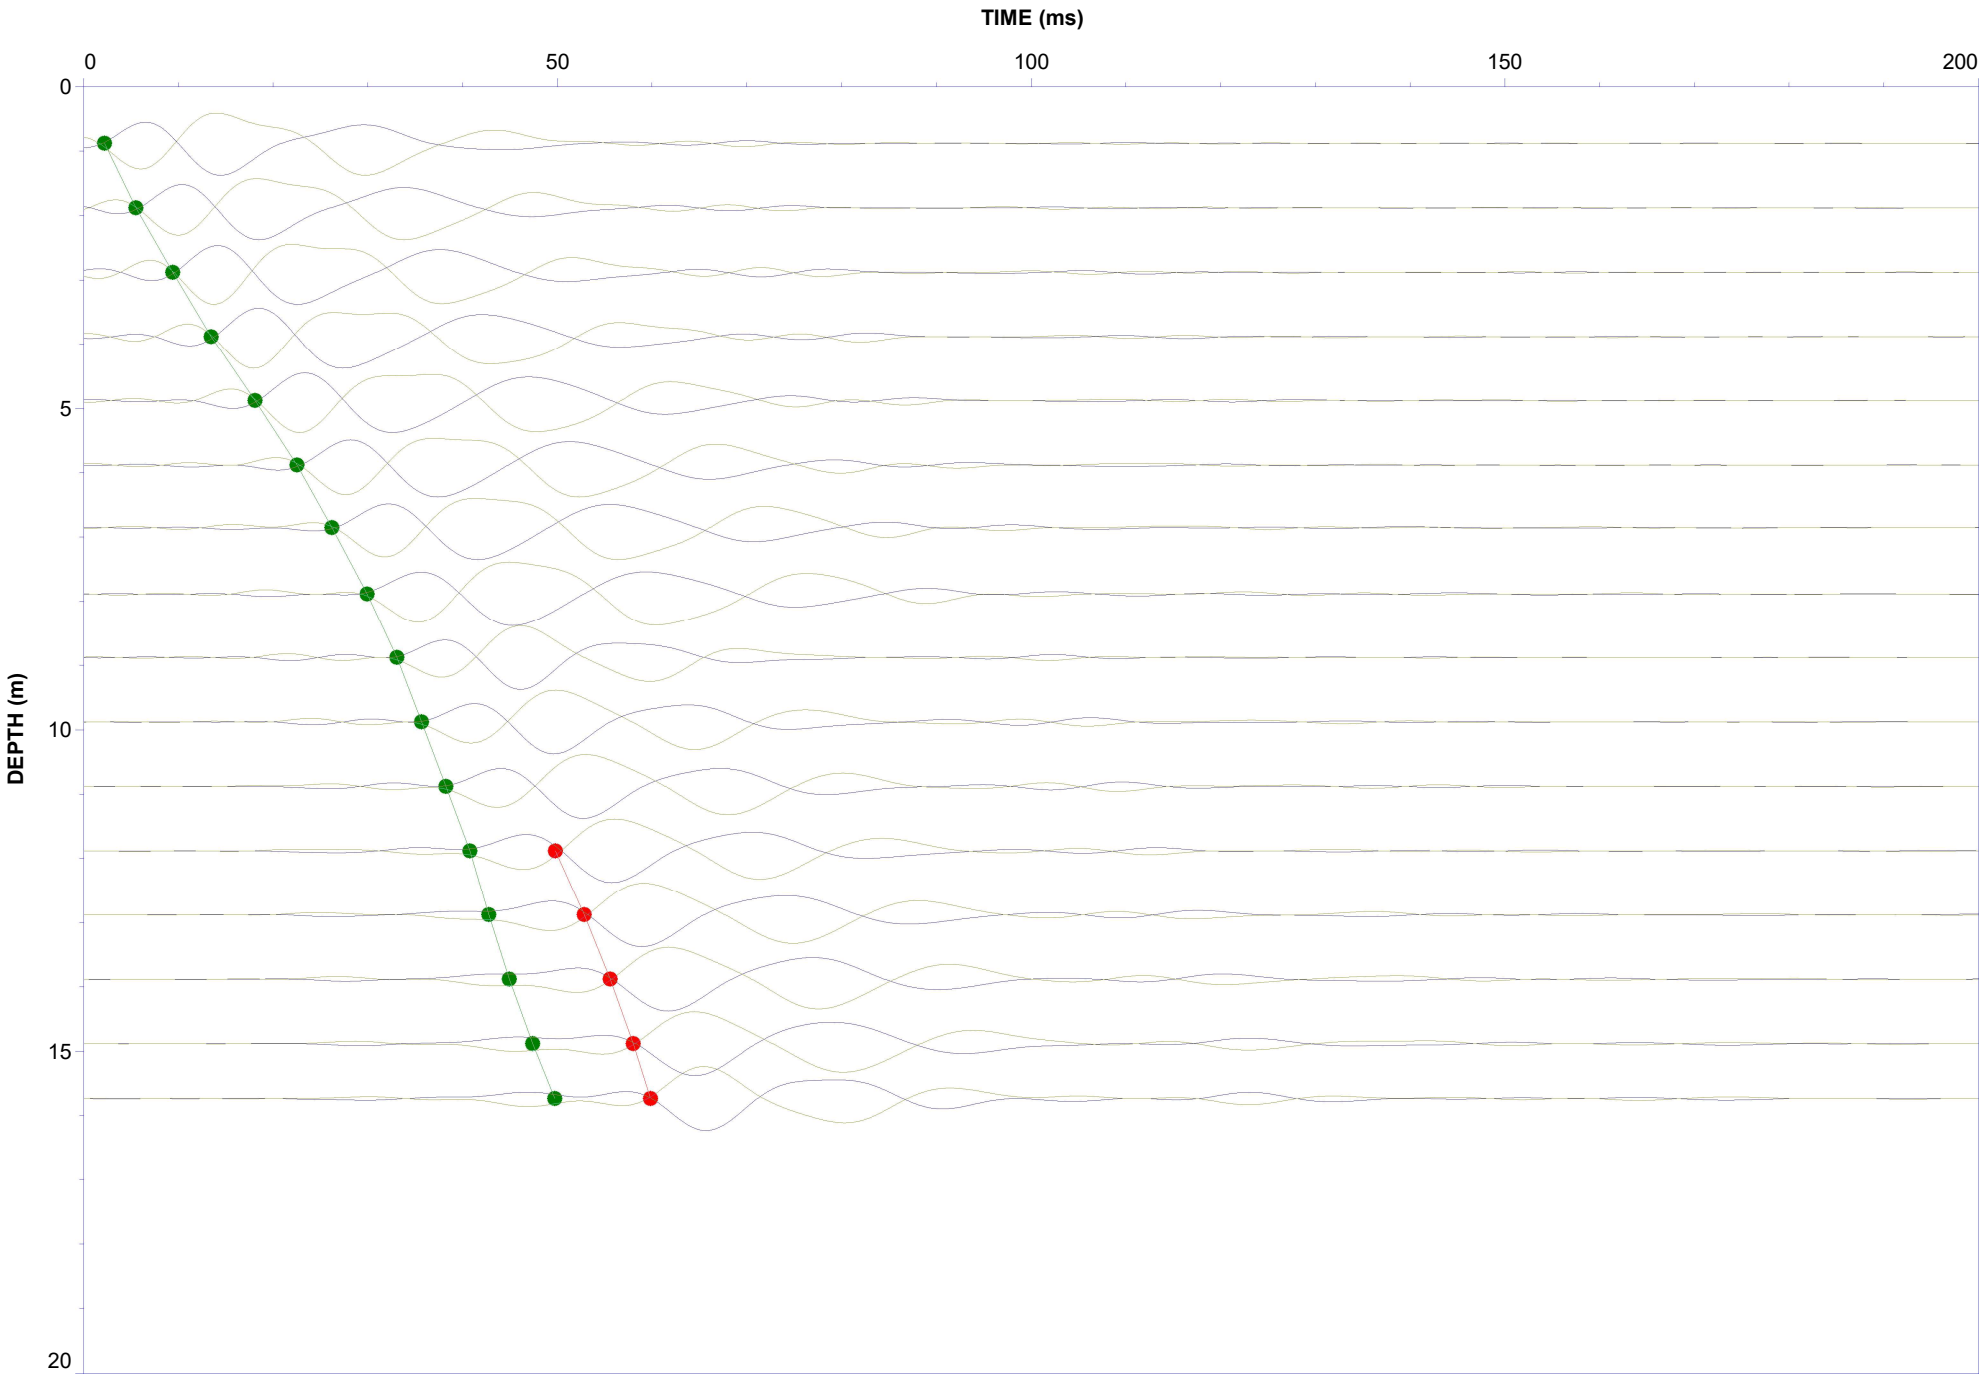


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT103 Filter: 0-150 Hz
Date: 19-Mar-2022

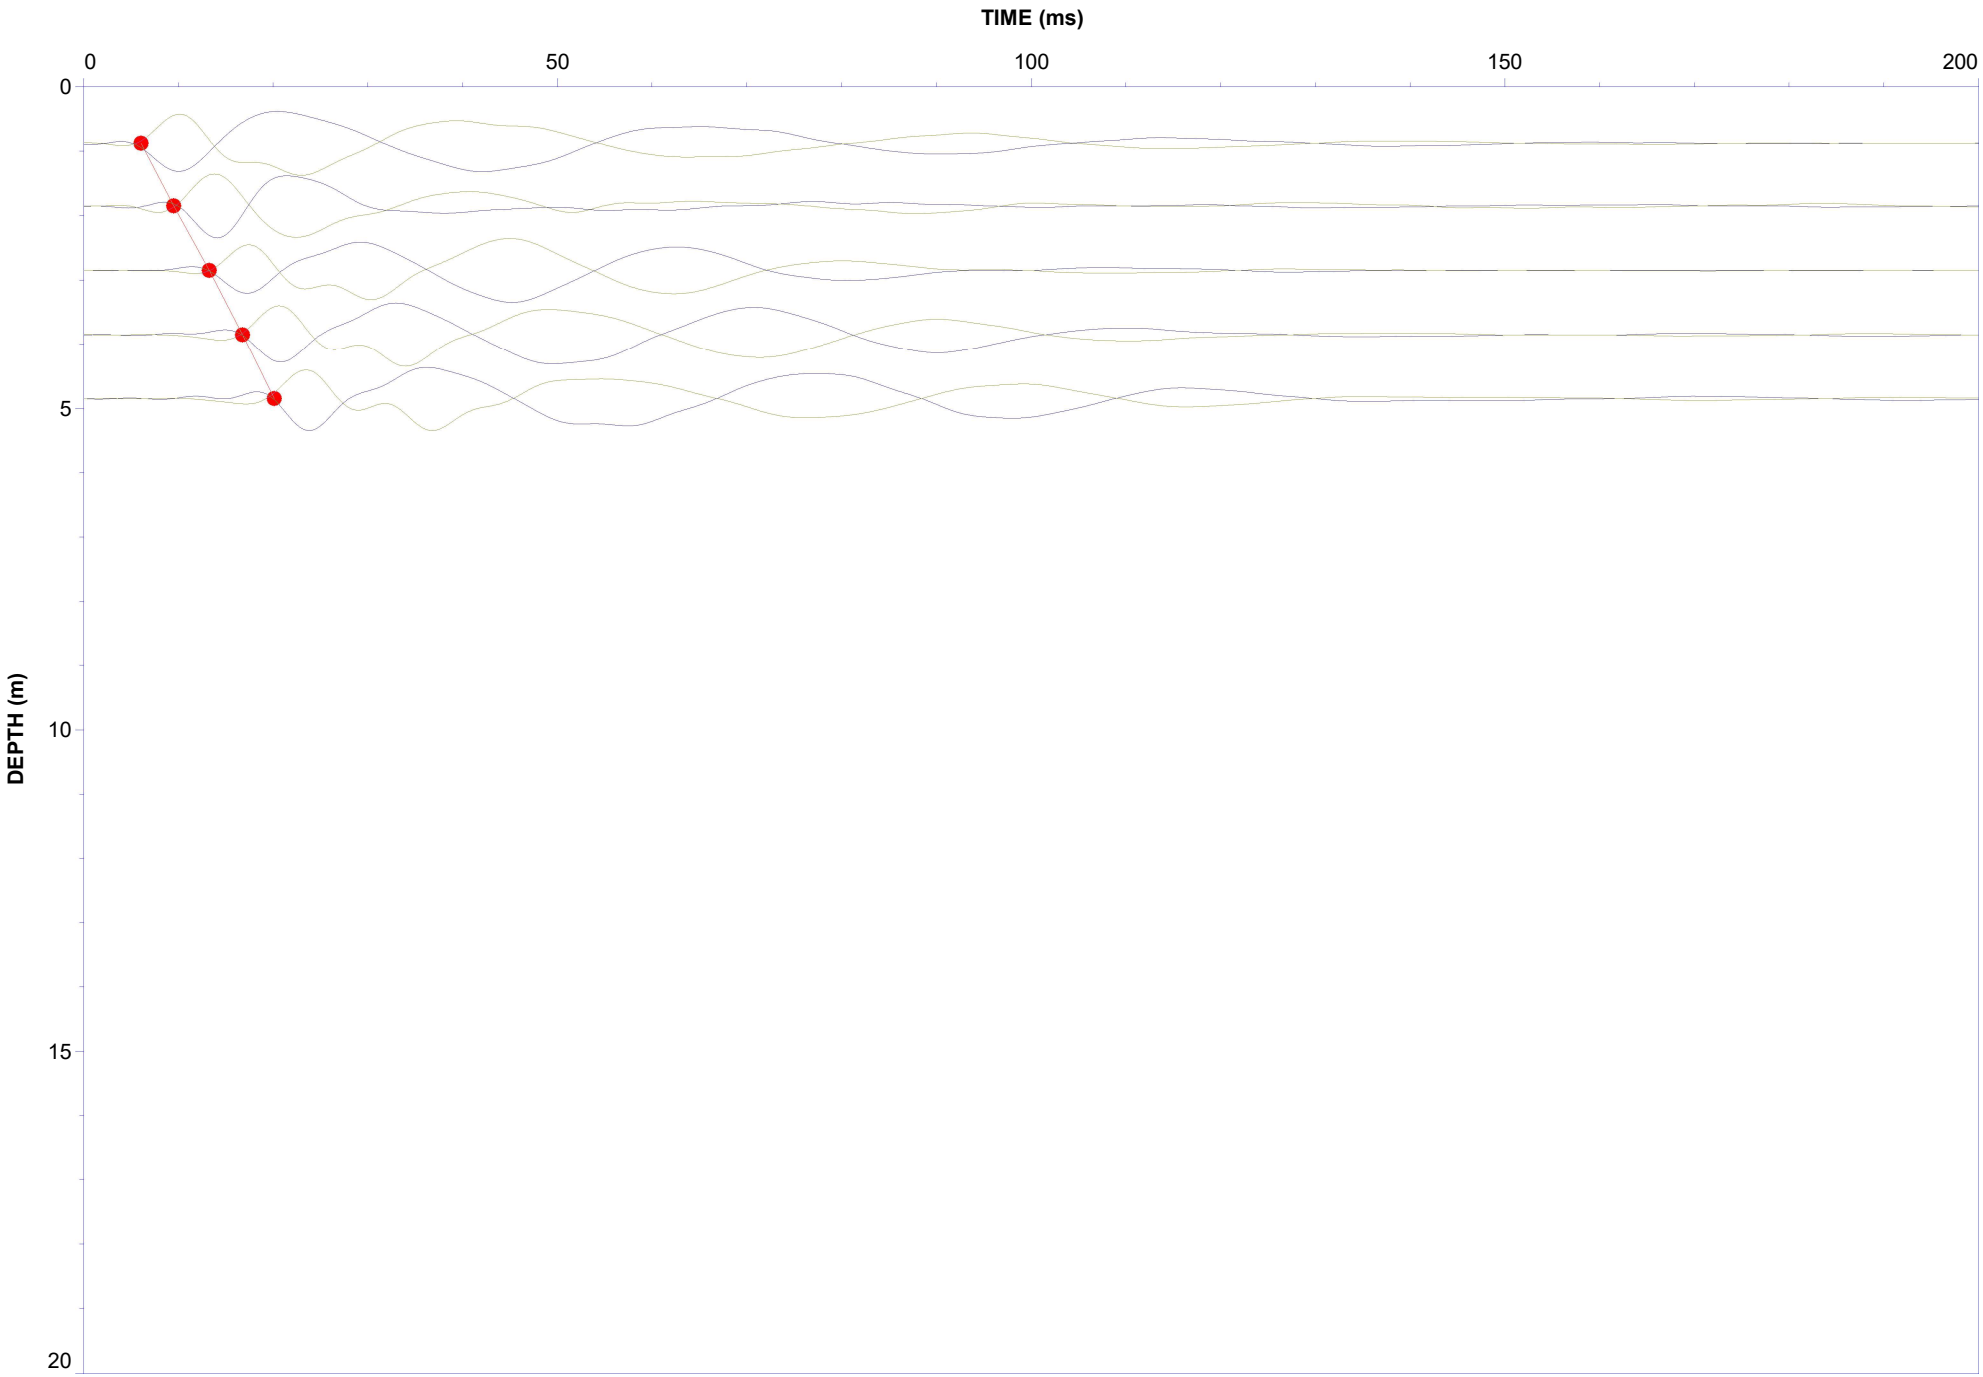


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT106 Filter: 0-150 Hz
Date: 20-Mar-2022

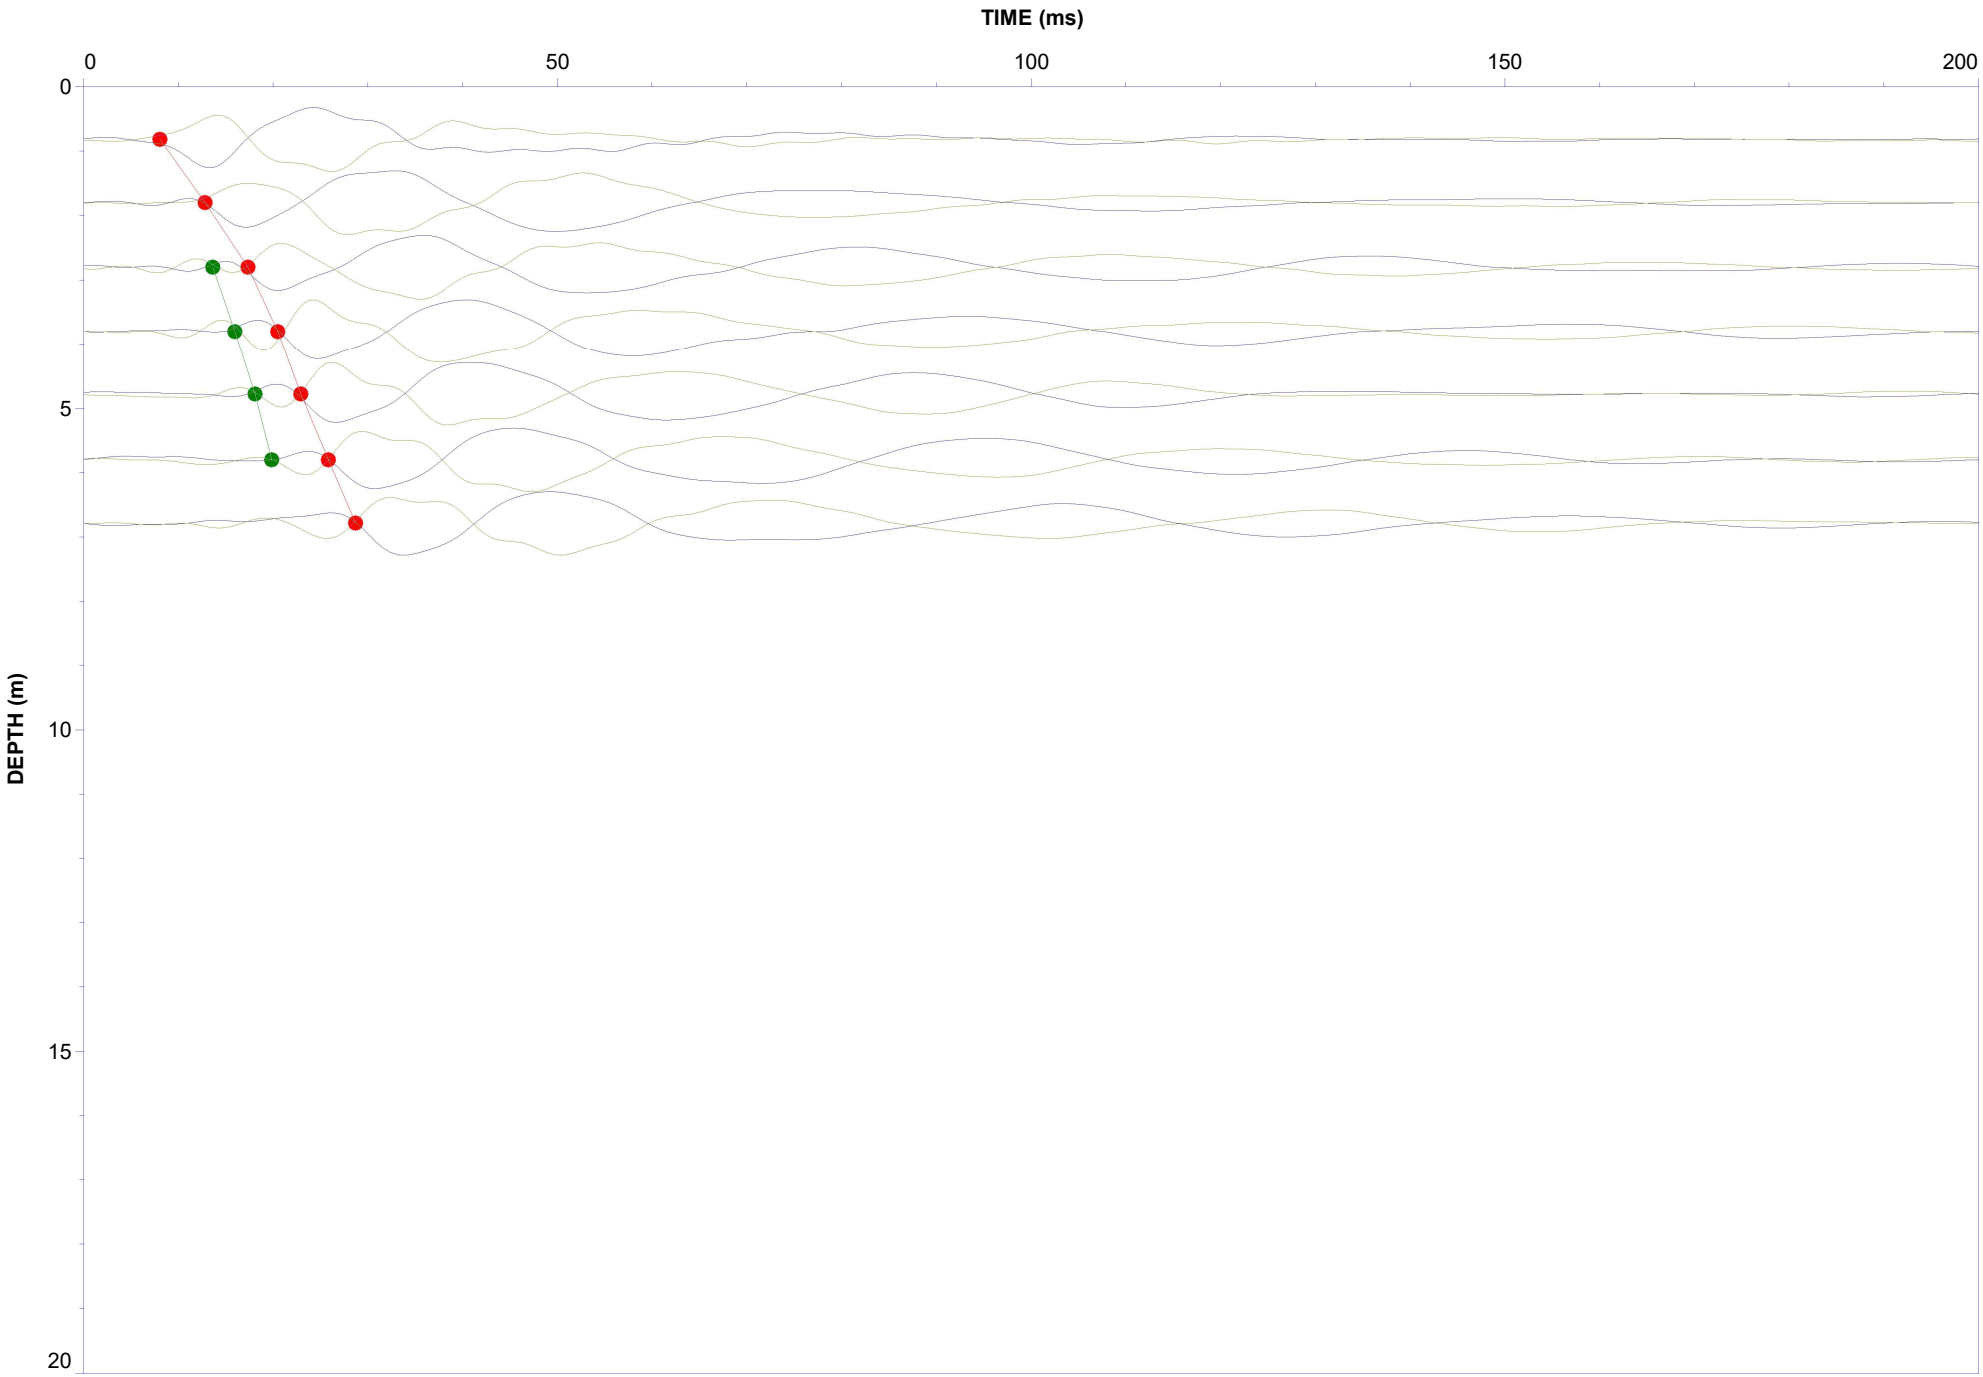


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT109 Filter: 0-250 Hz
Date: 22-Mar-2022

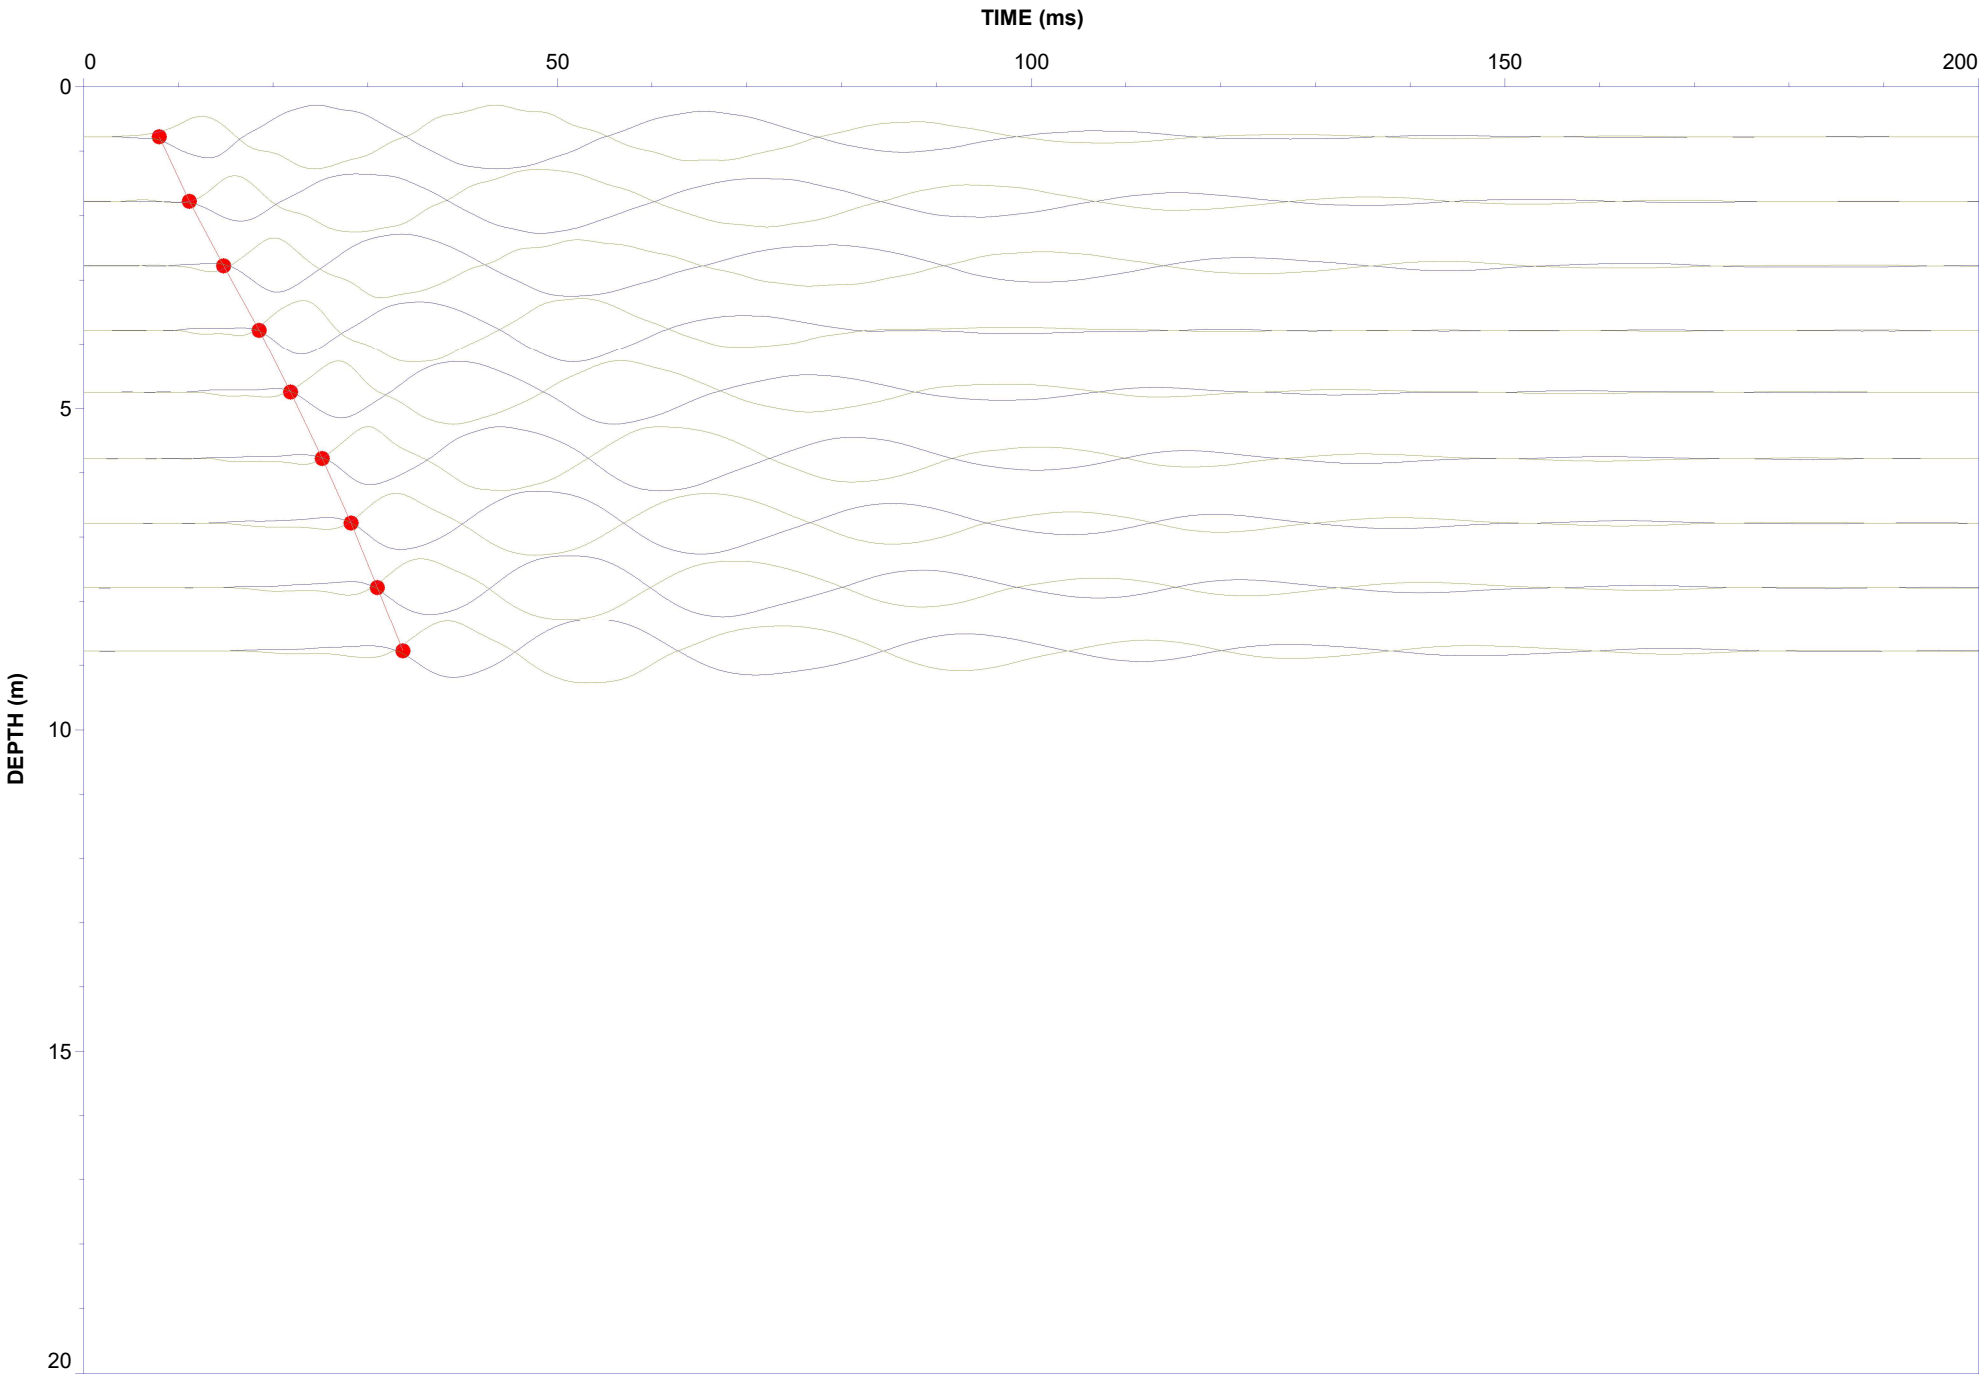


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT112 Filter: 0-100 Hz
Date: 21-Mar-2022

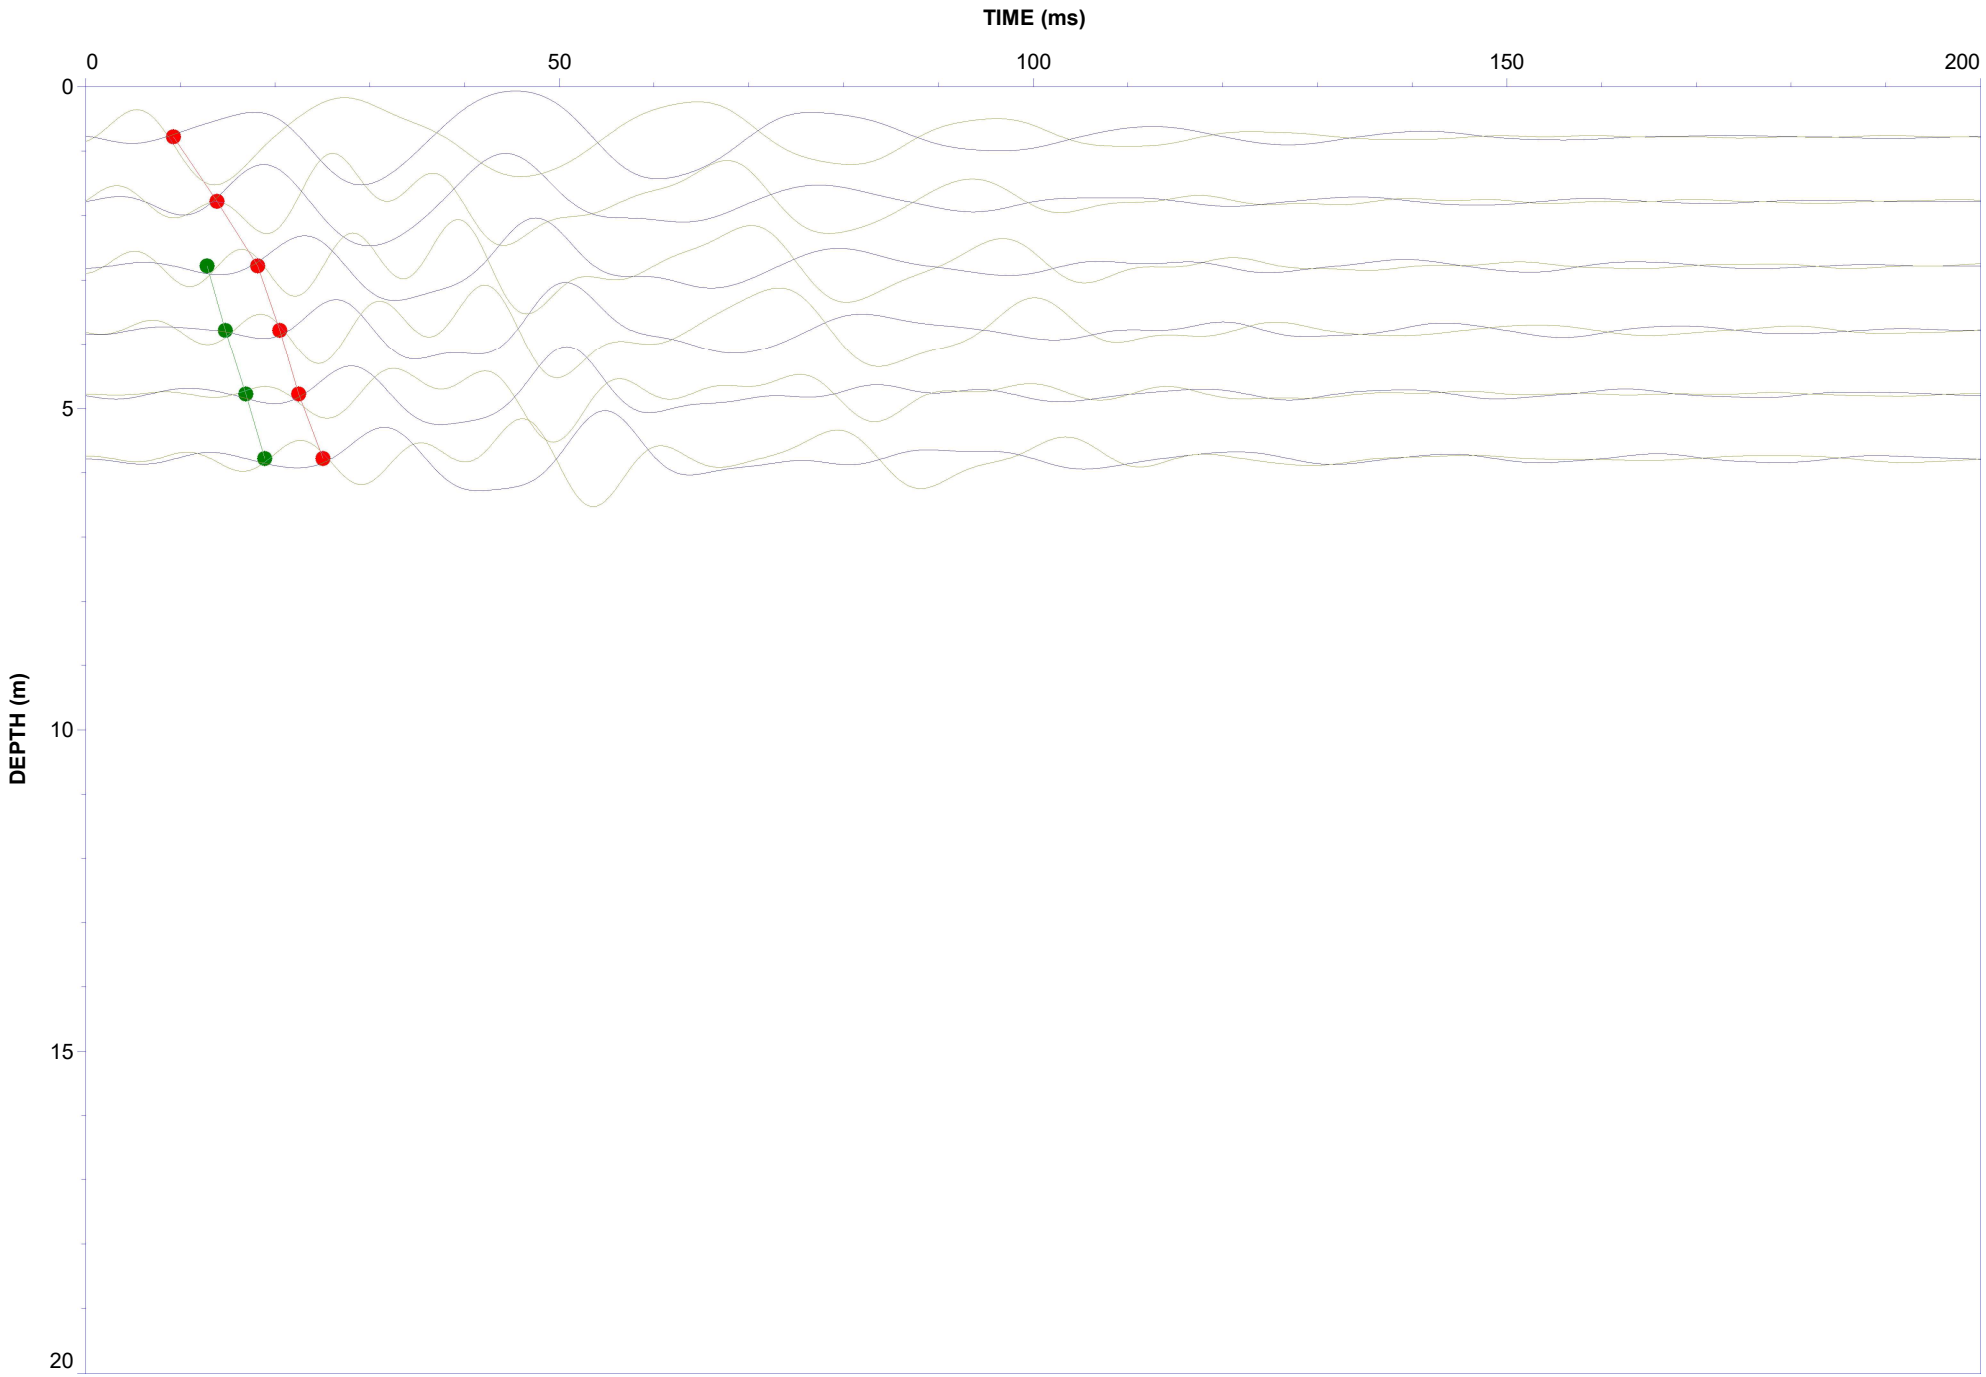


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT115 Filter: 0-100 Hz
Date: 15-Apr-2022

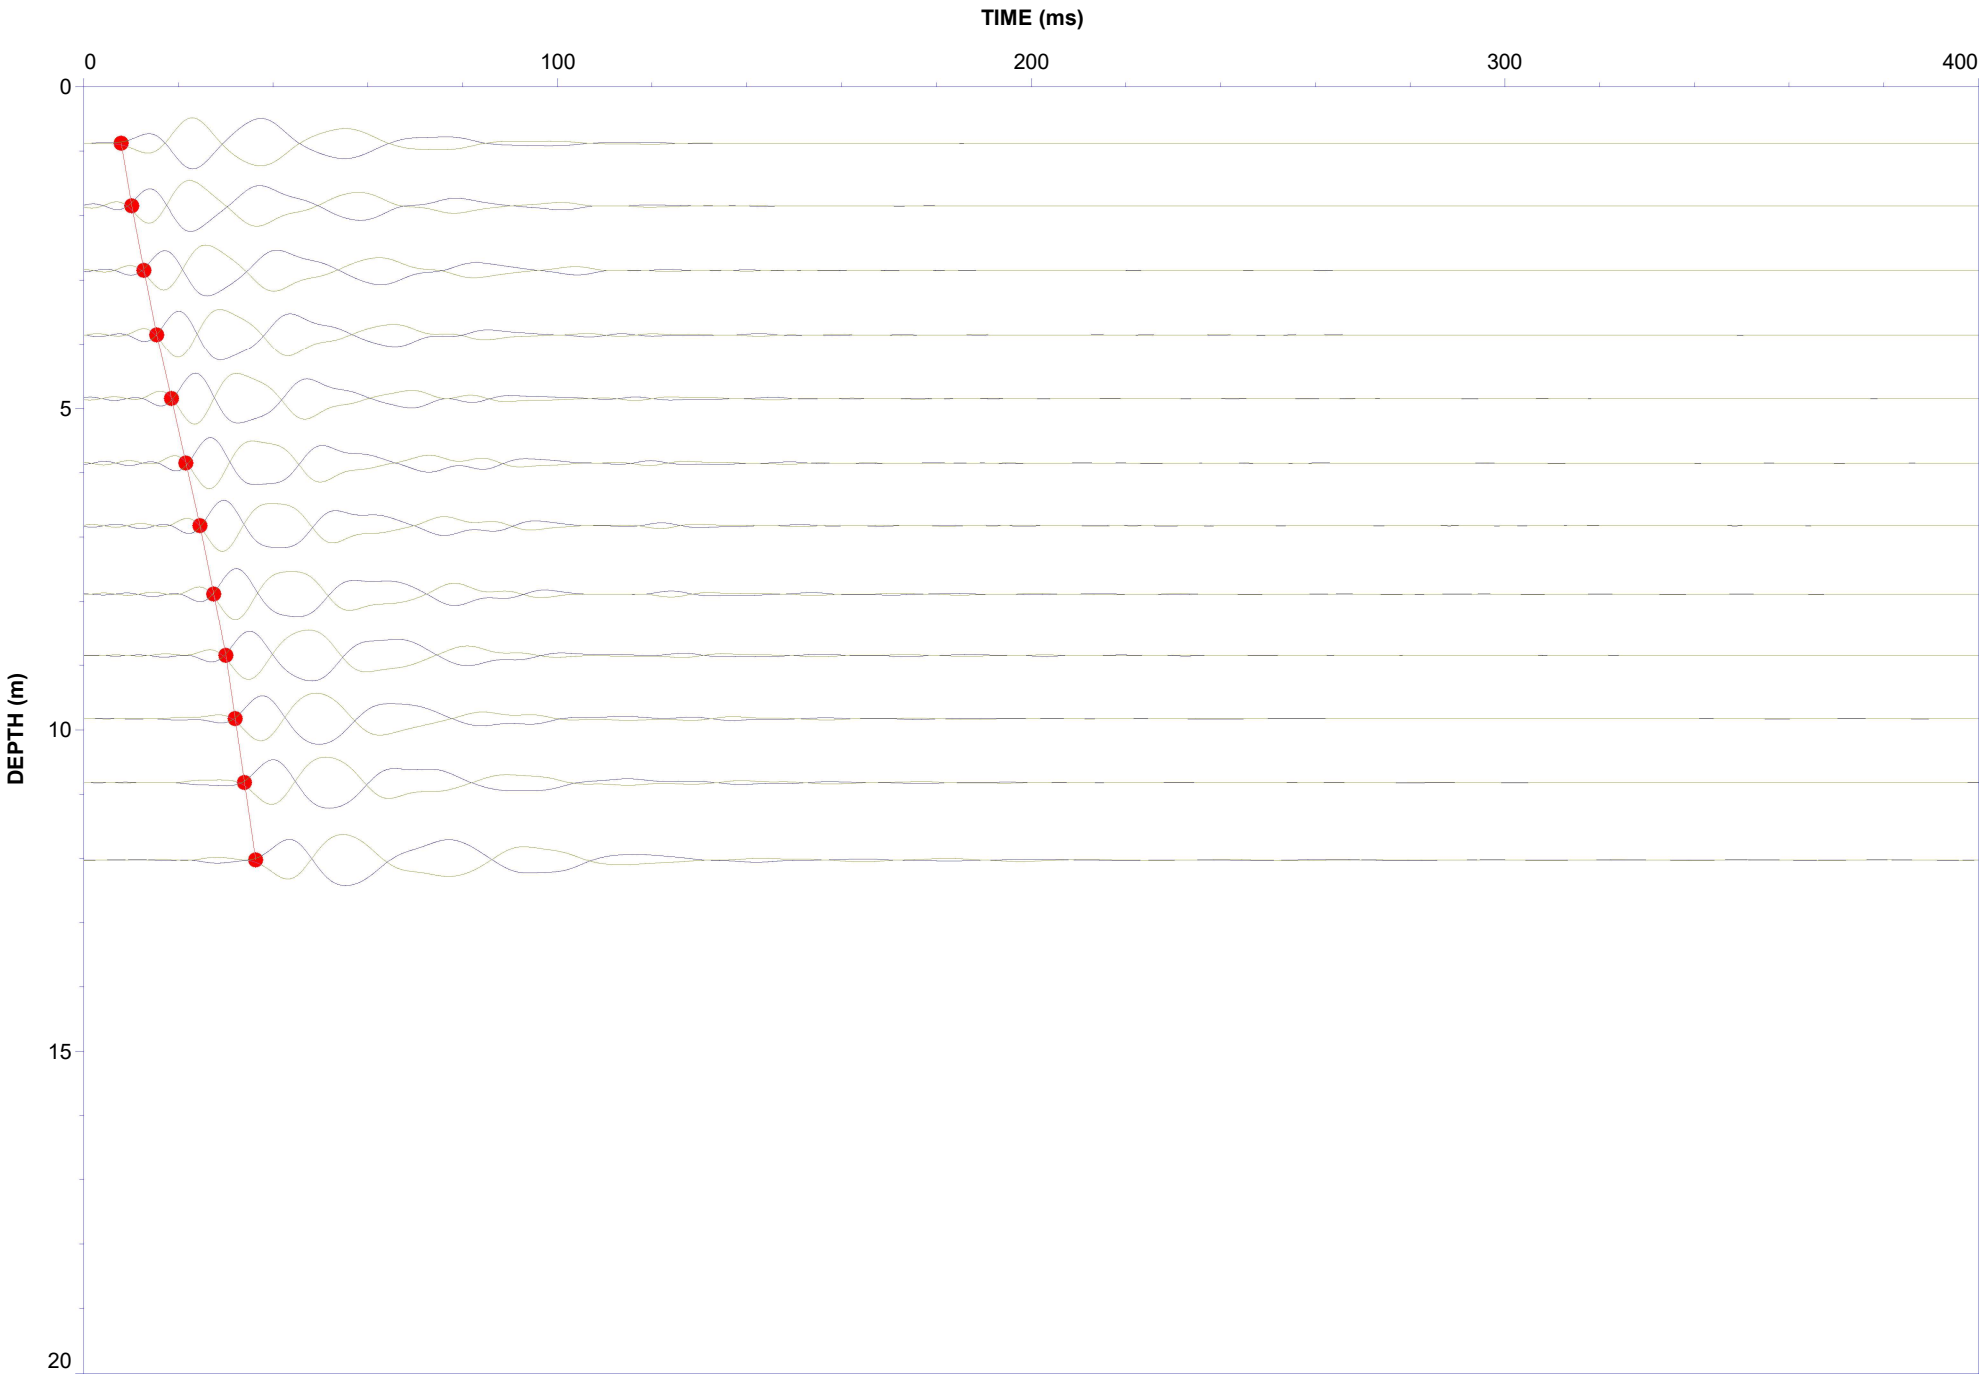


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT121 Filter: 0-250 Hz
Date: 22-Mar-2022

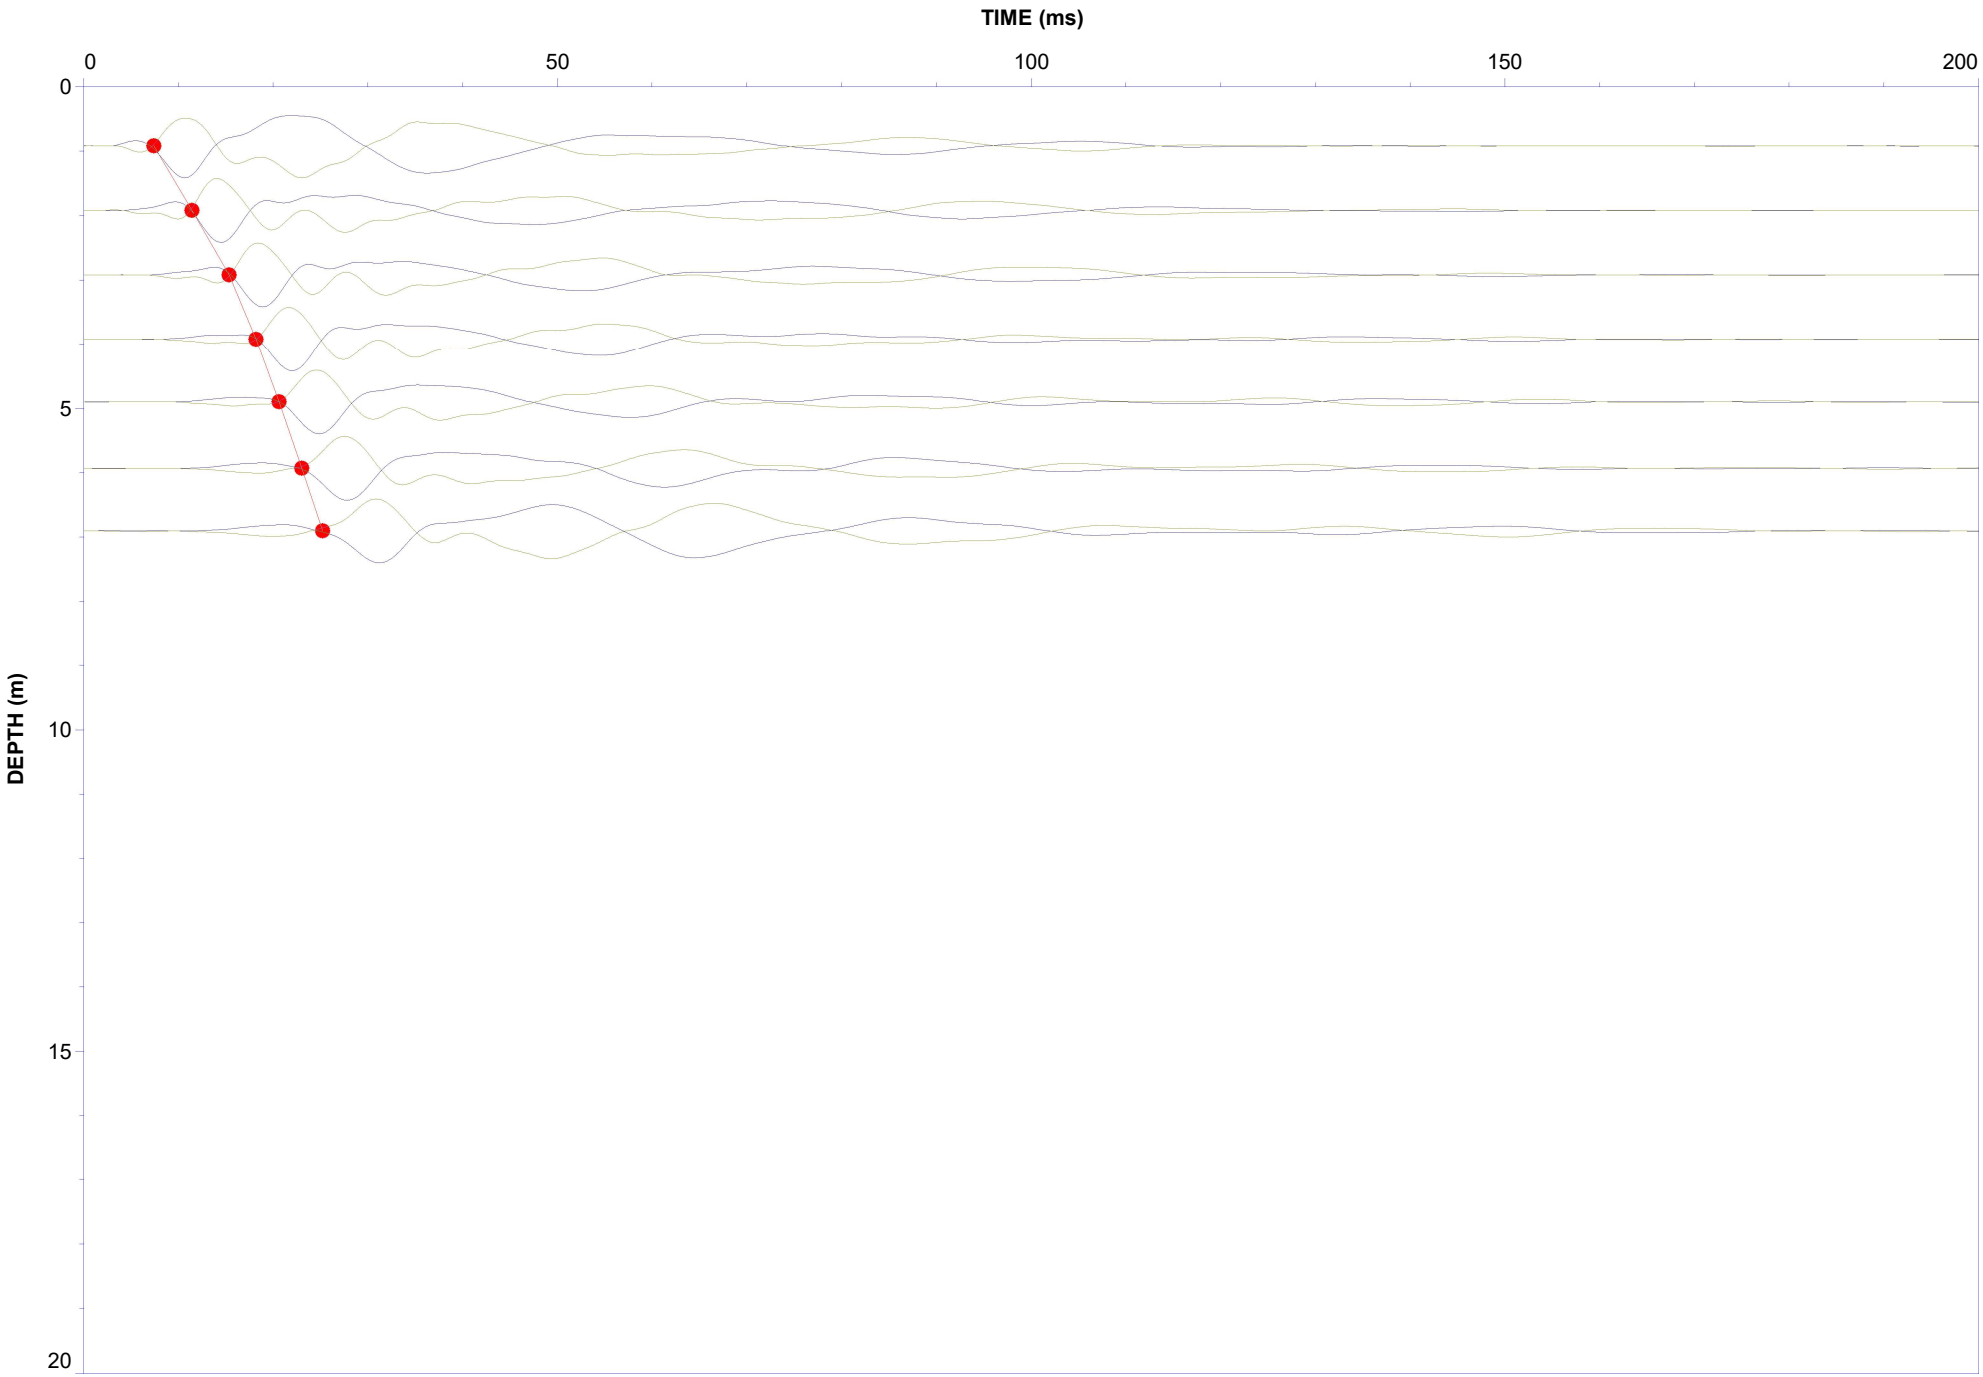


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT127 Filter: 0-150 Hz
Date: 23-Mar-2022

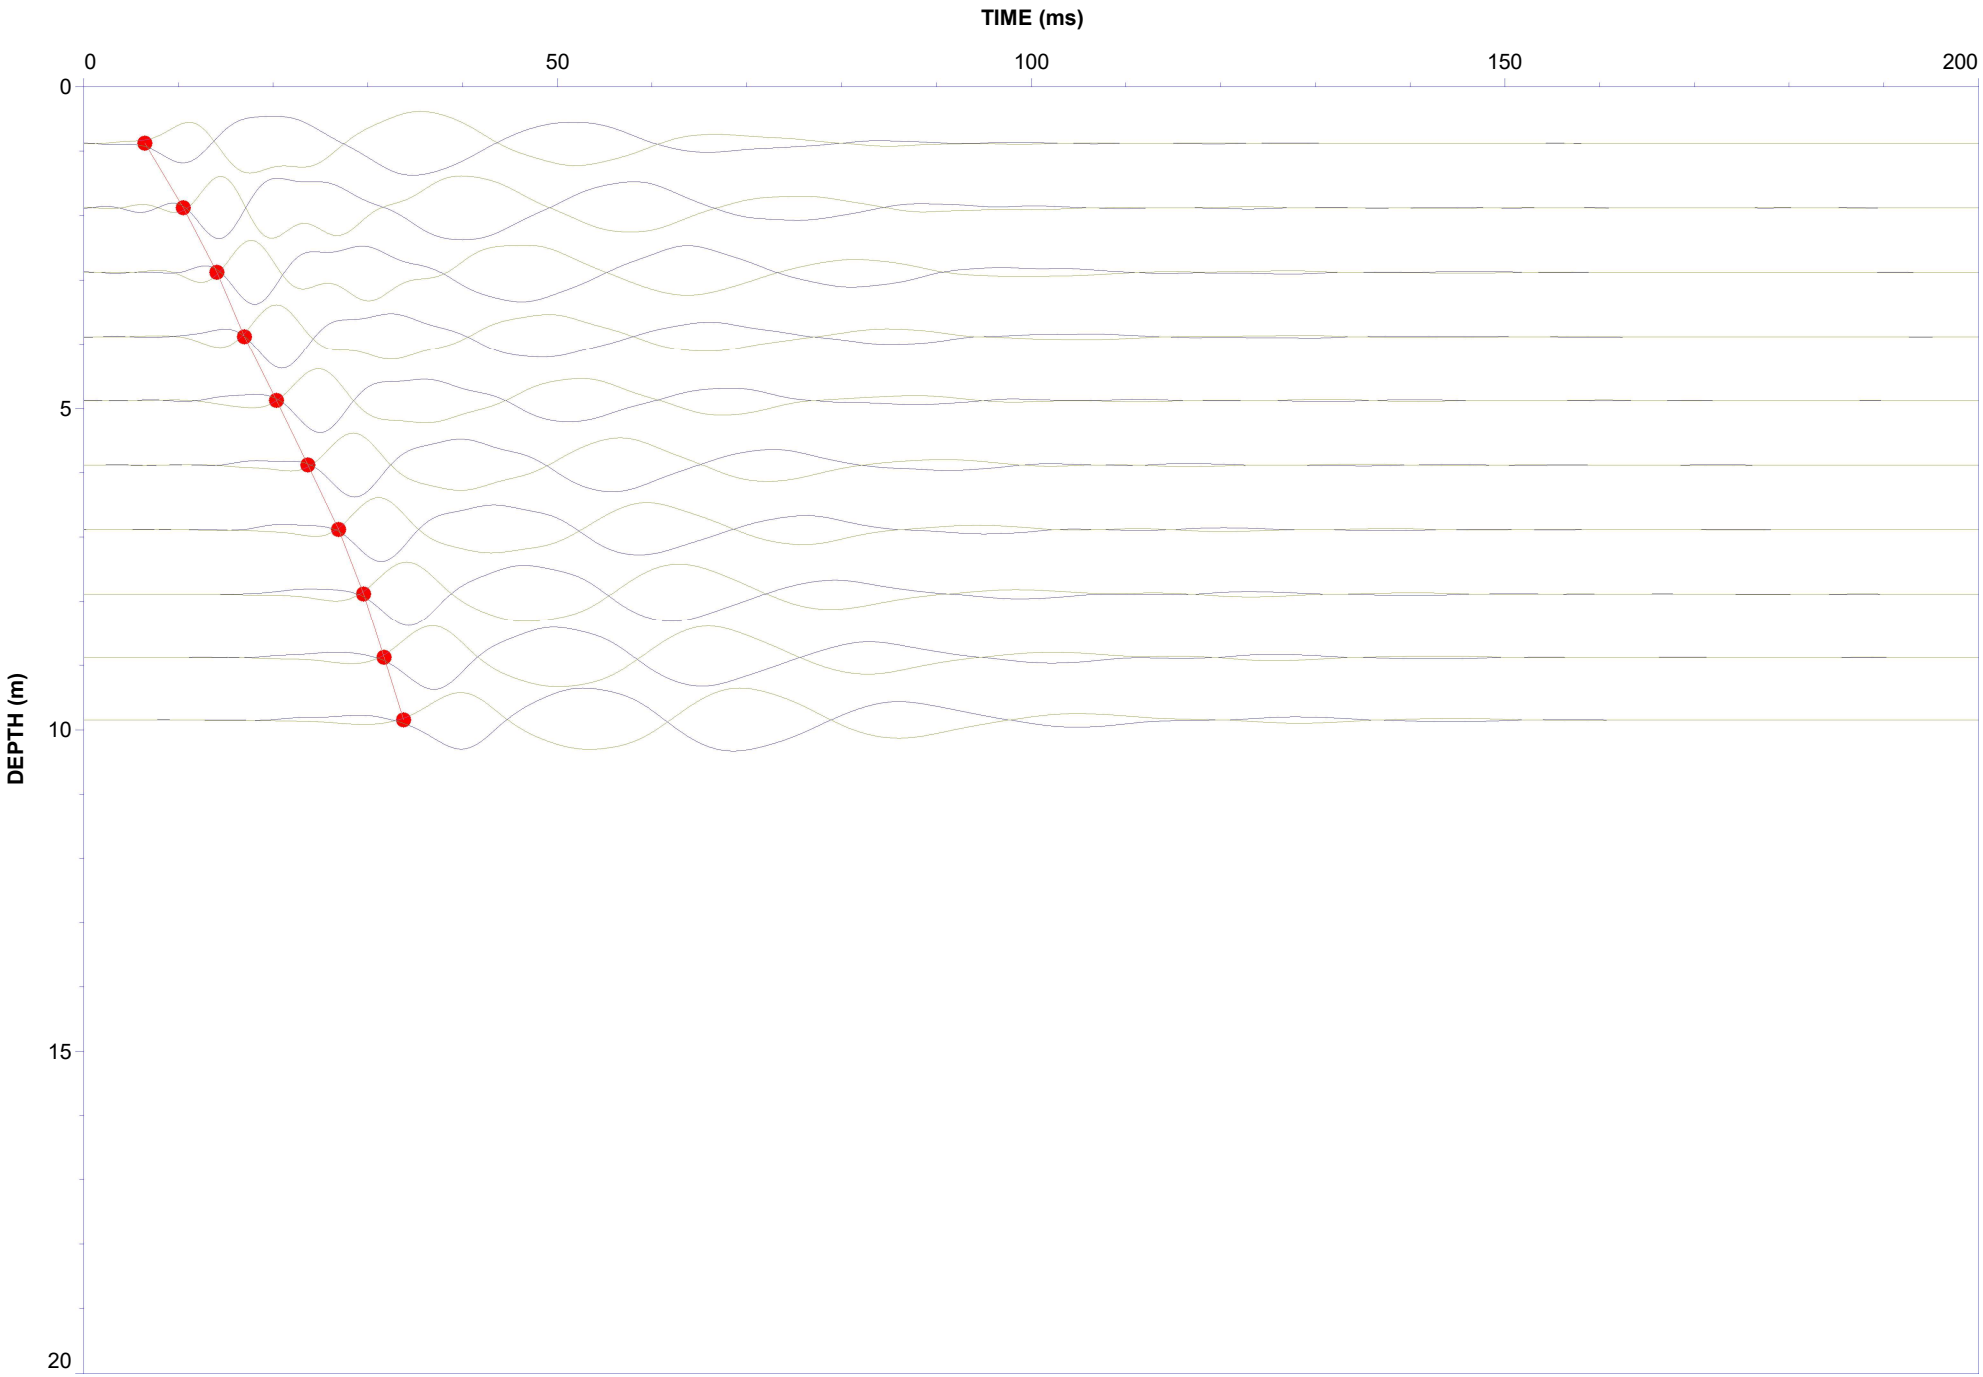


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT131E Filter: 0-200 Hz
Date: 15-Apr-2022

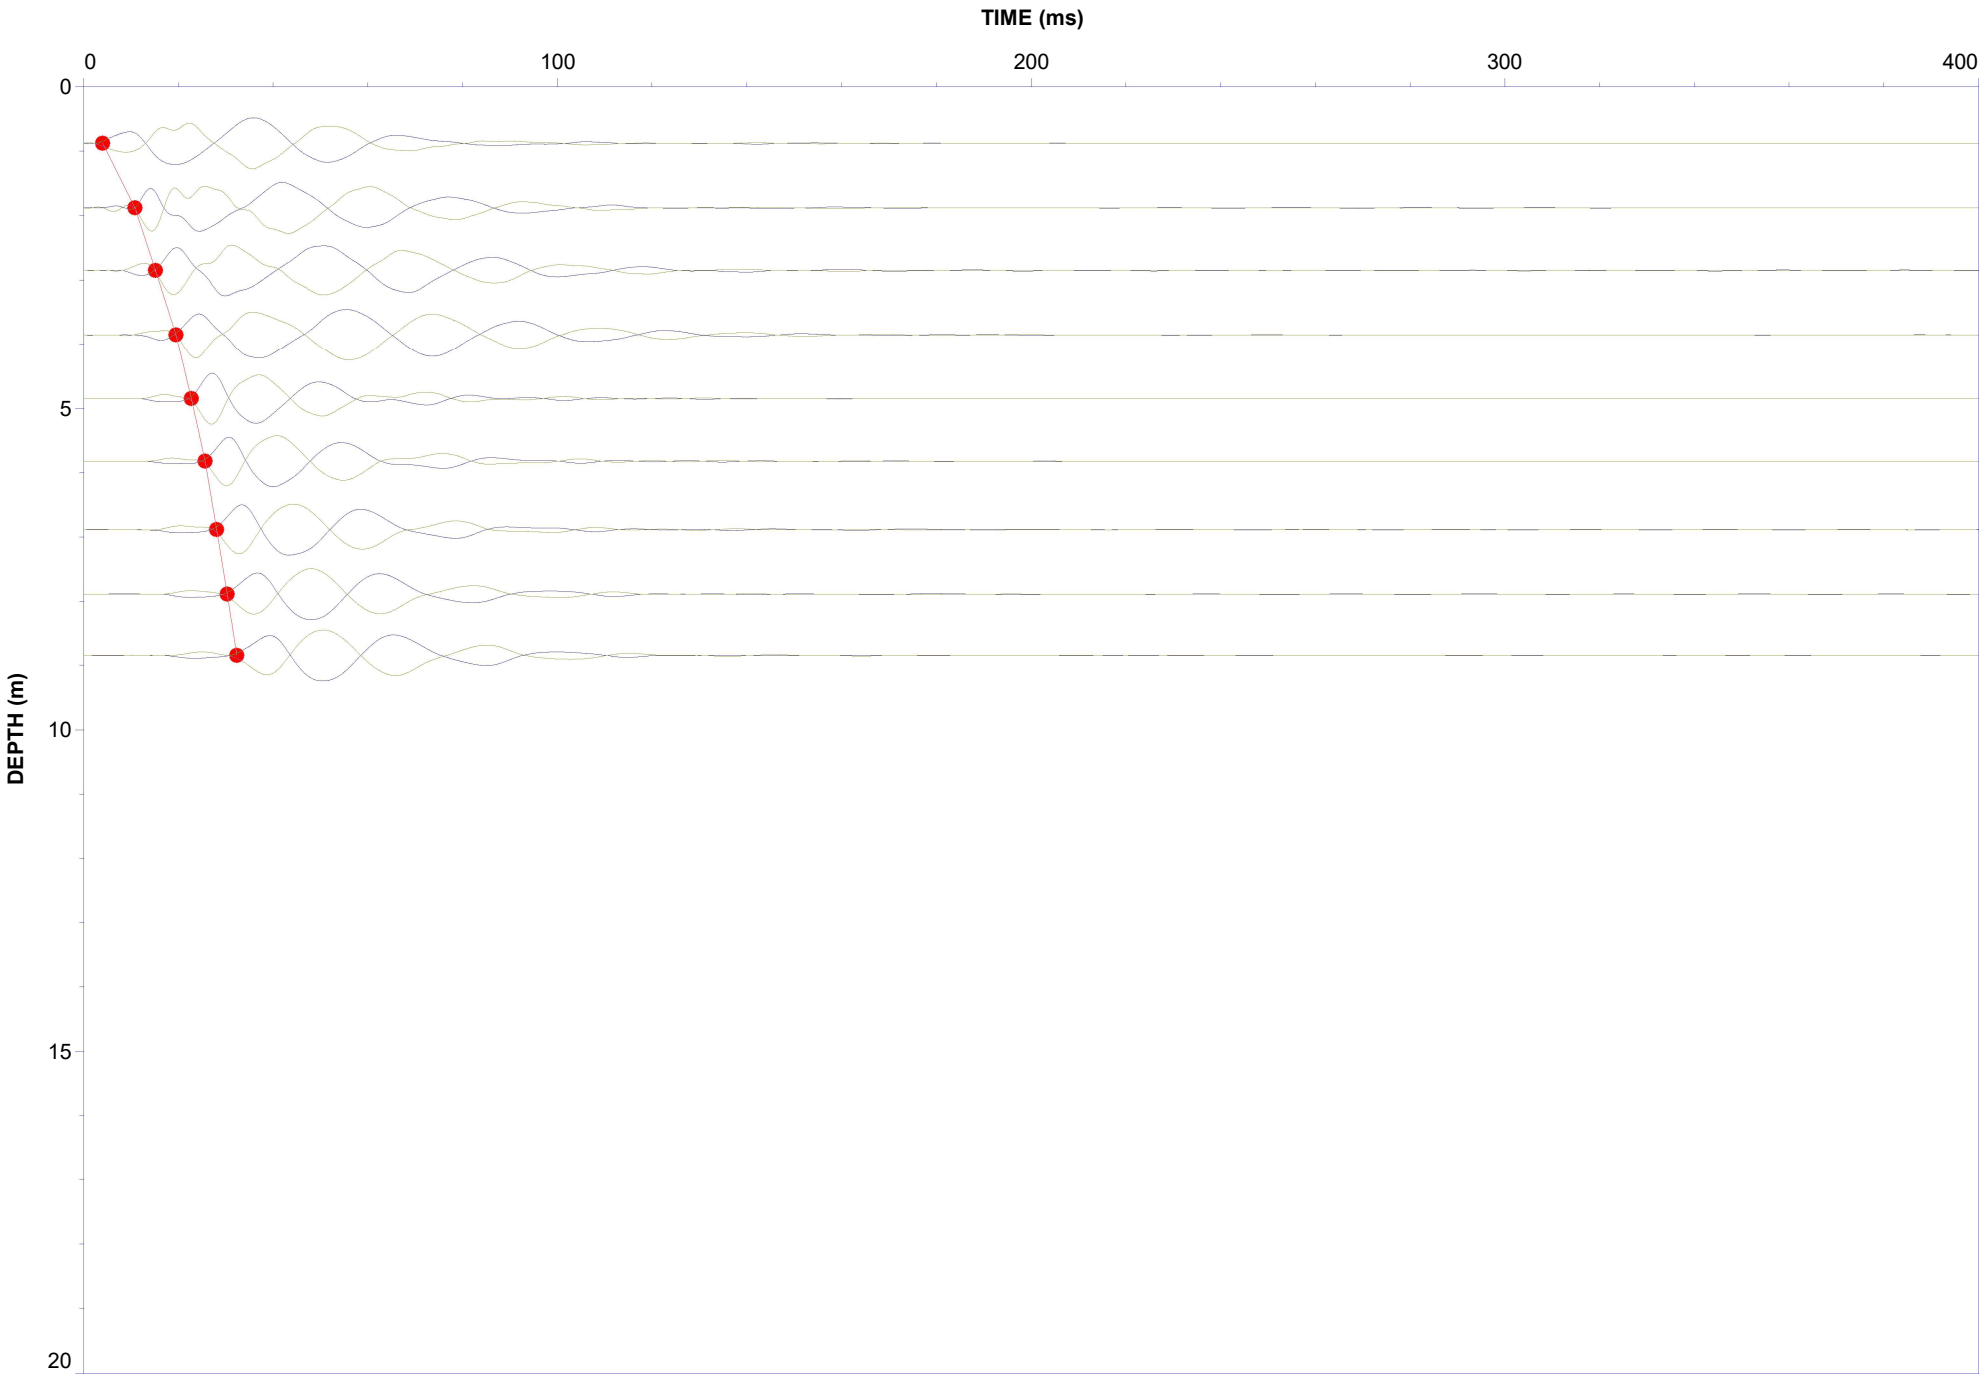


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT131N Filter: 0-100 Hz
Date: 15-Apr-2022

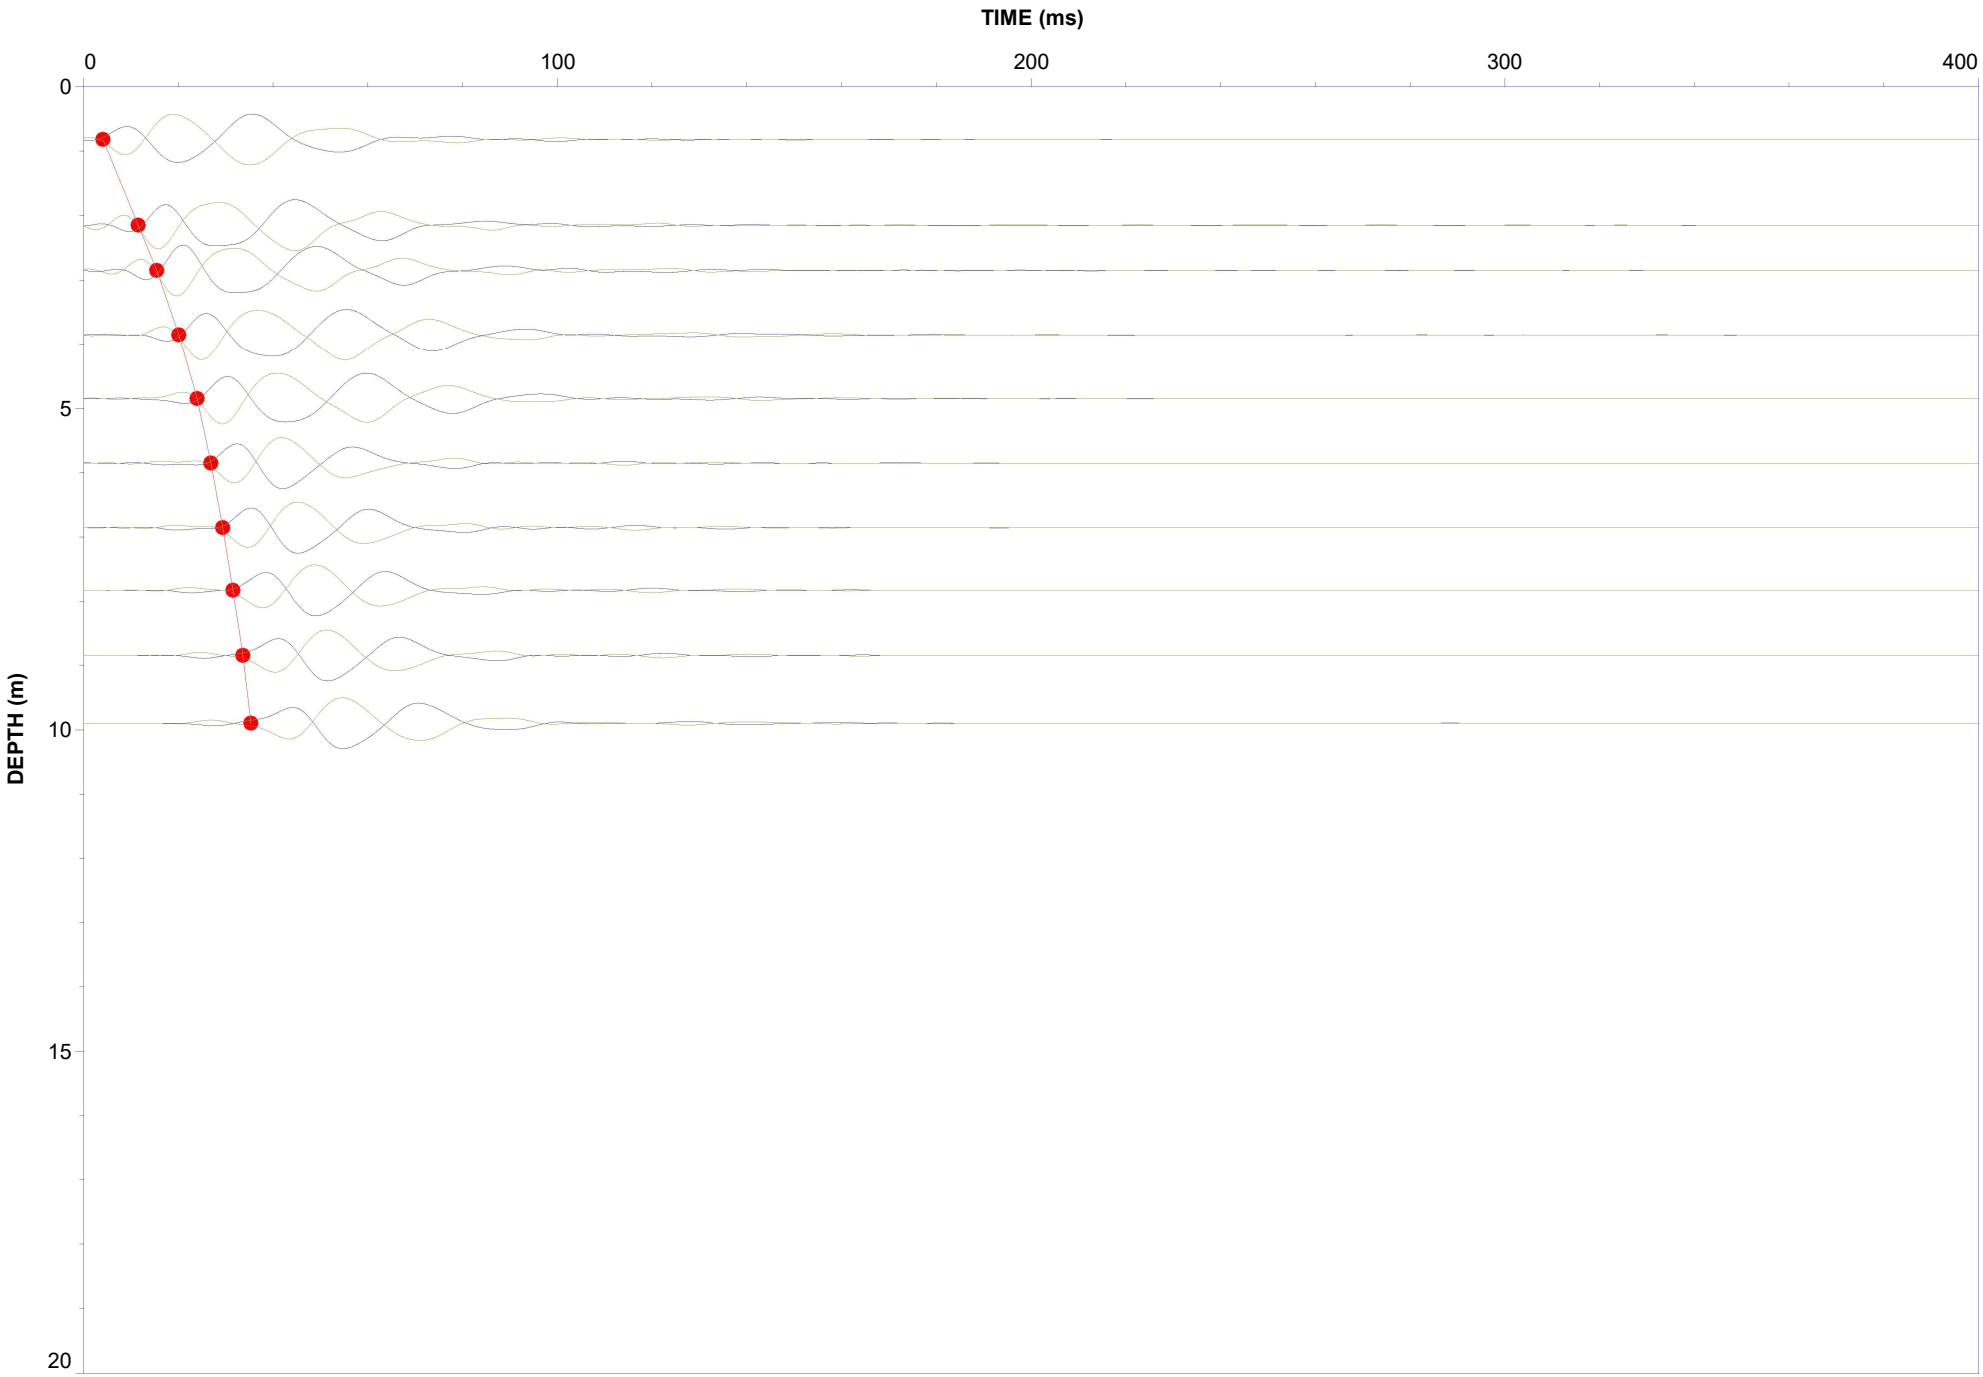


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT131S1 Filter: 0-75 Hz
Date: 15-Apr-2022

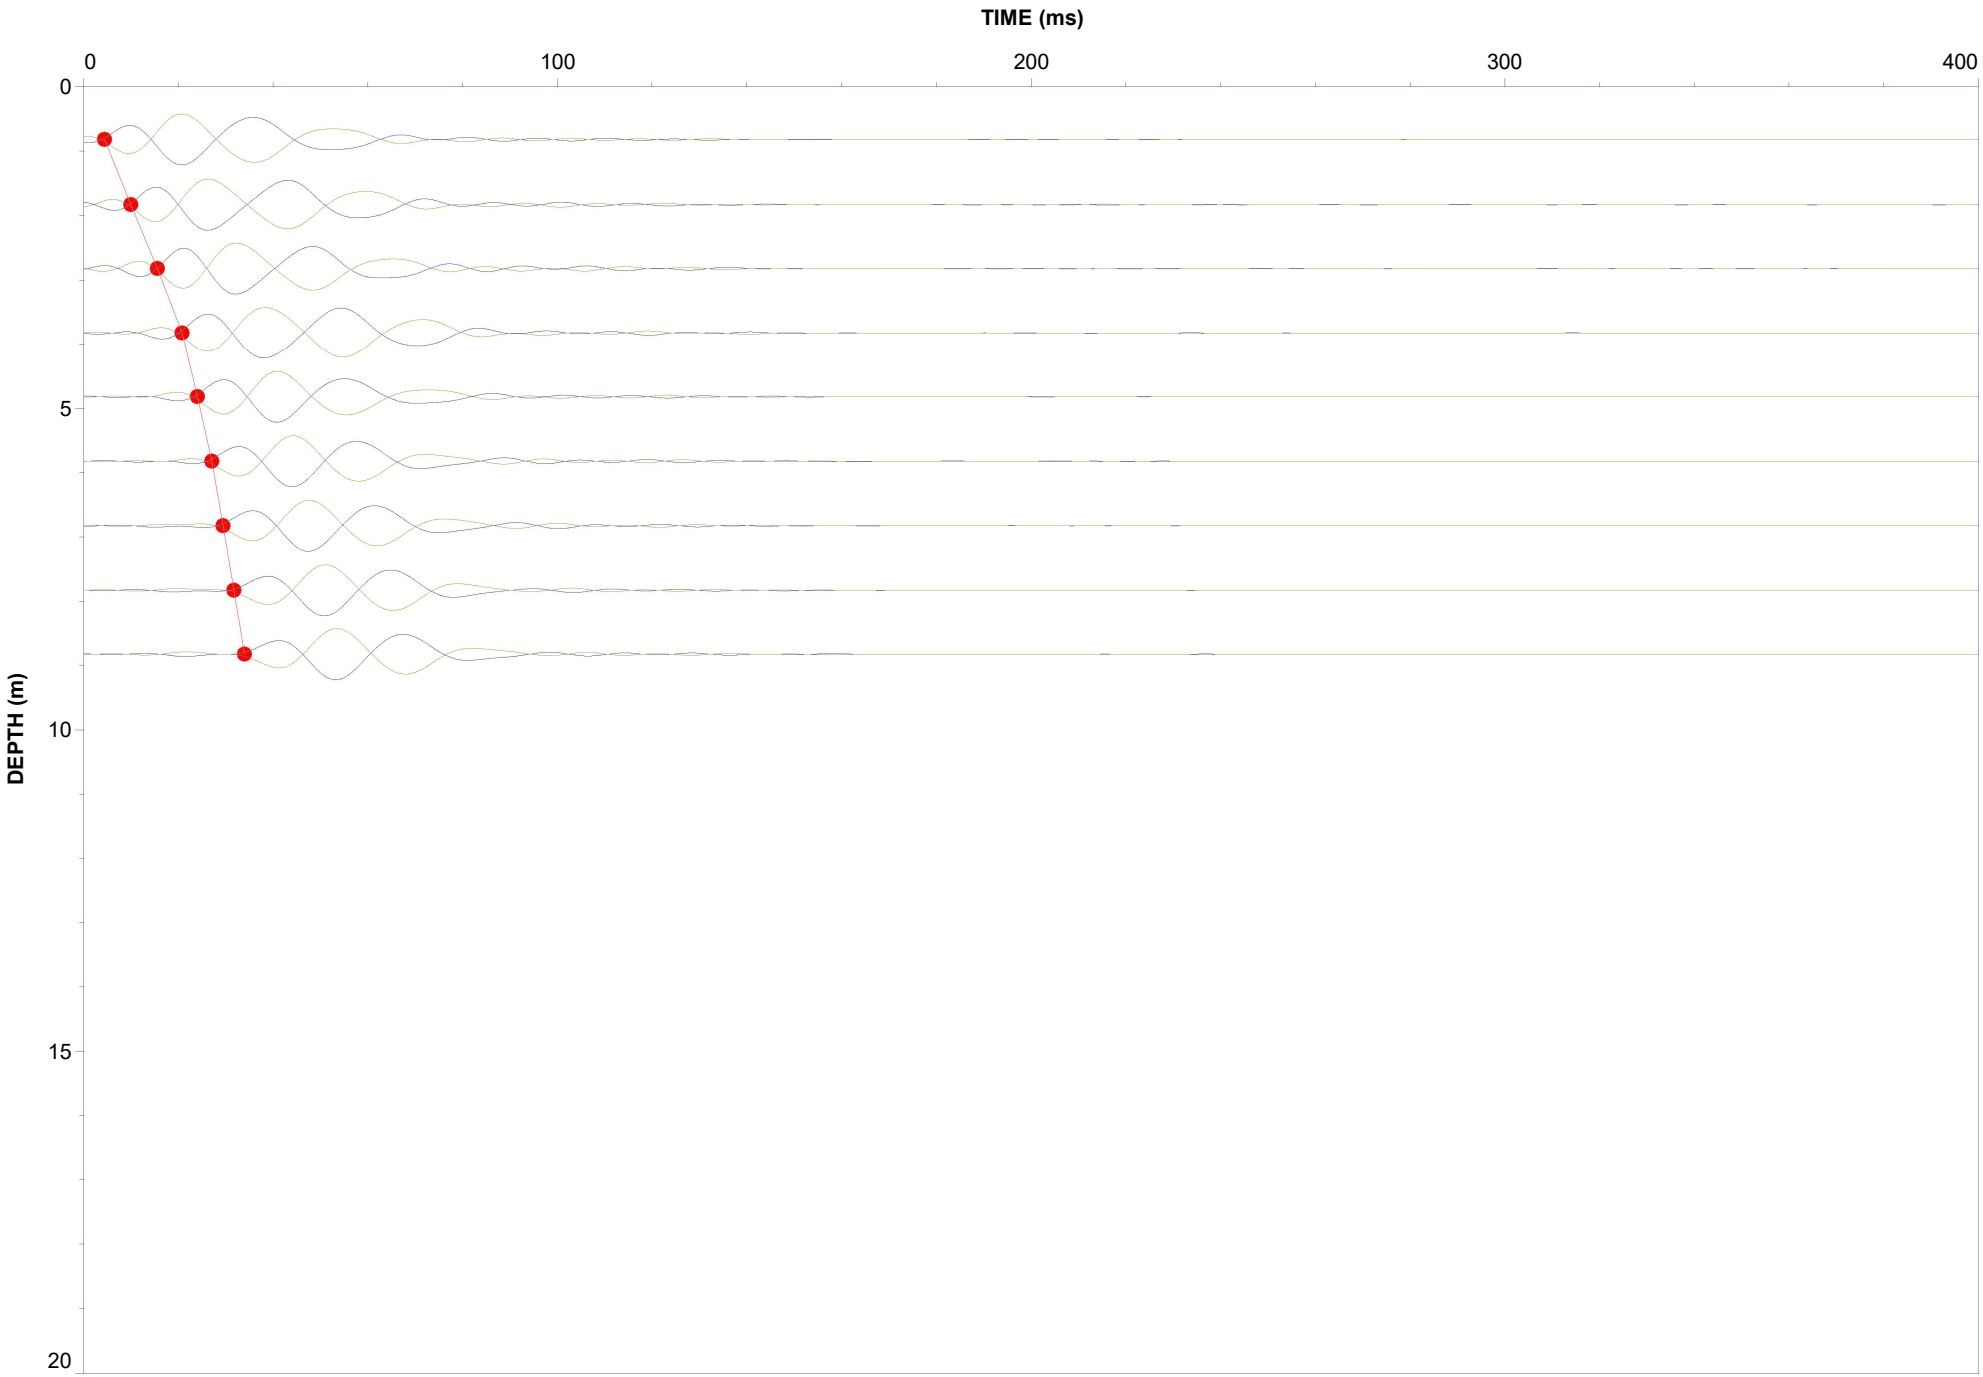


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT131S2 Filter: 0-75 Hz
Date: 15-Apr-2022

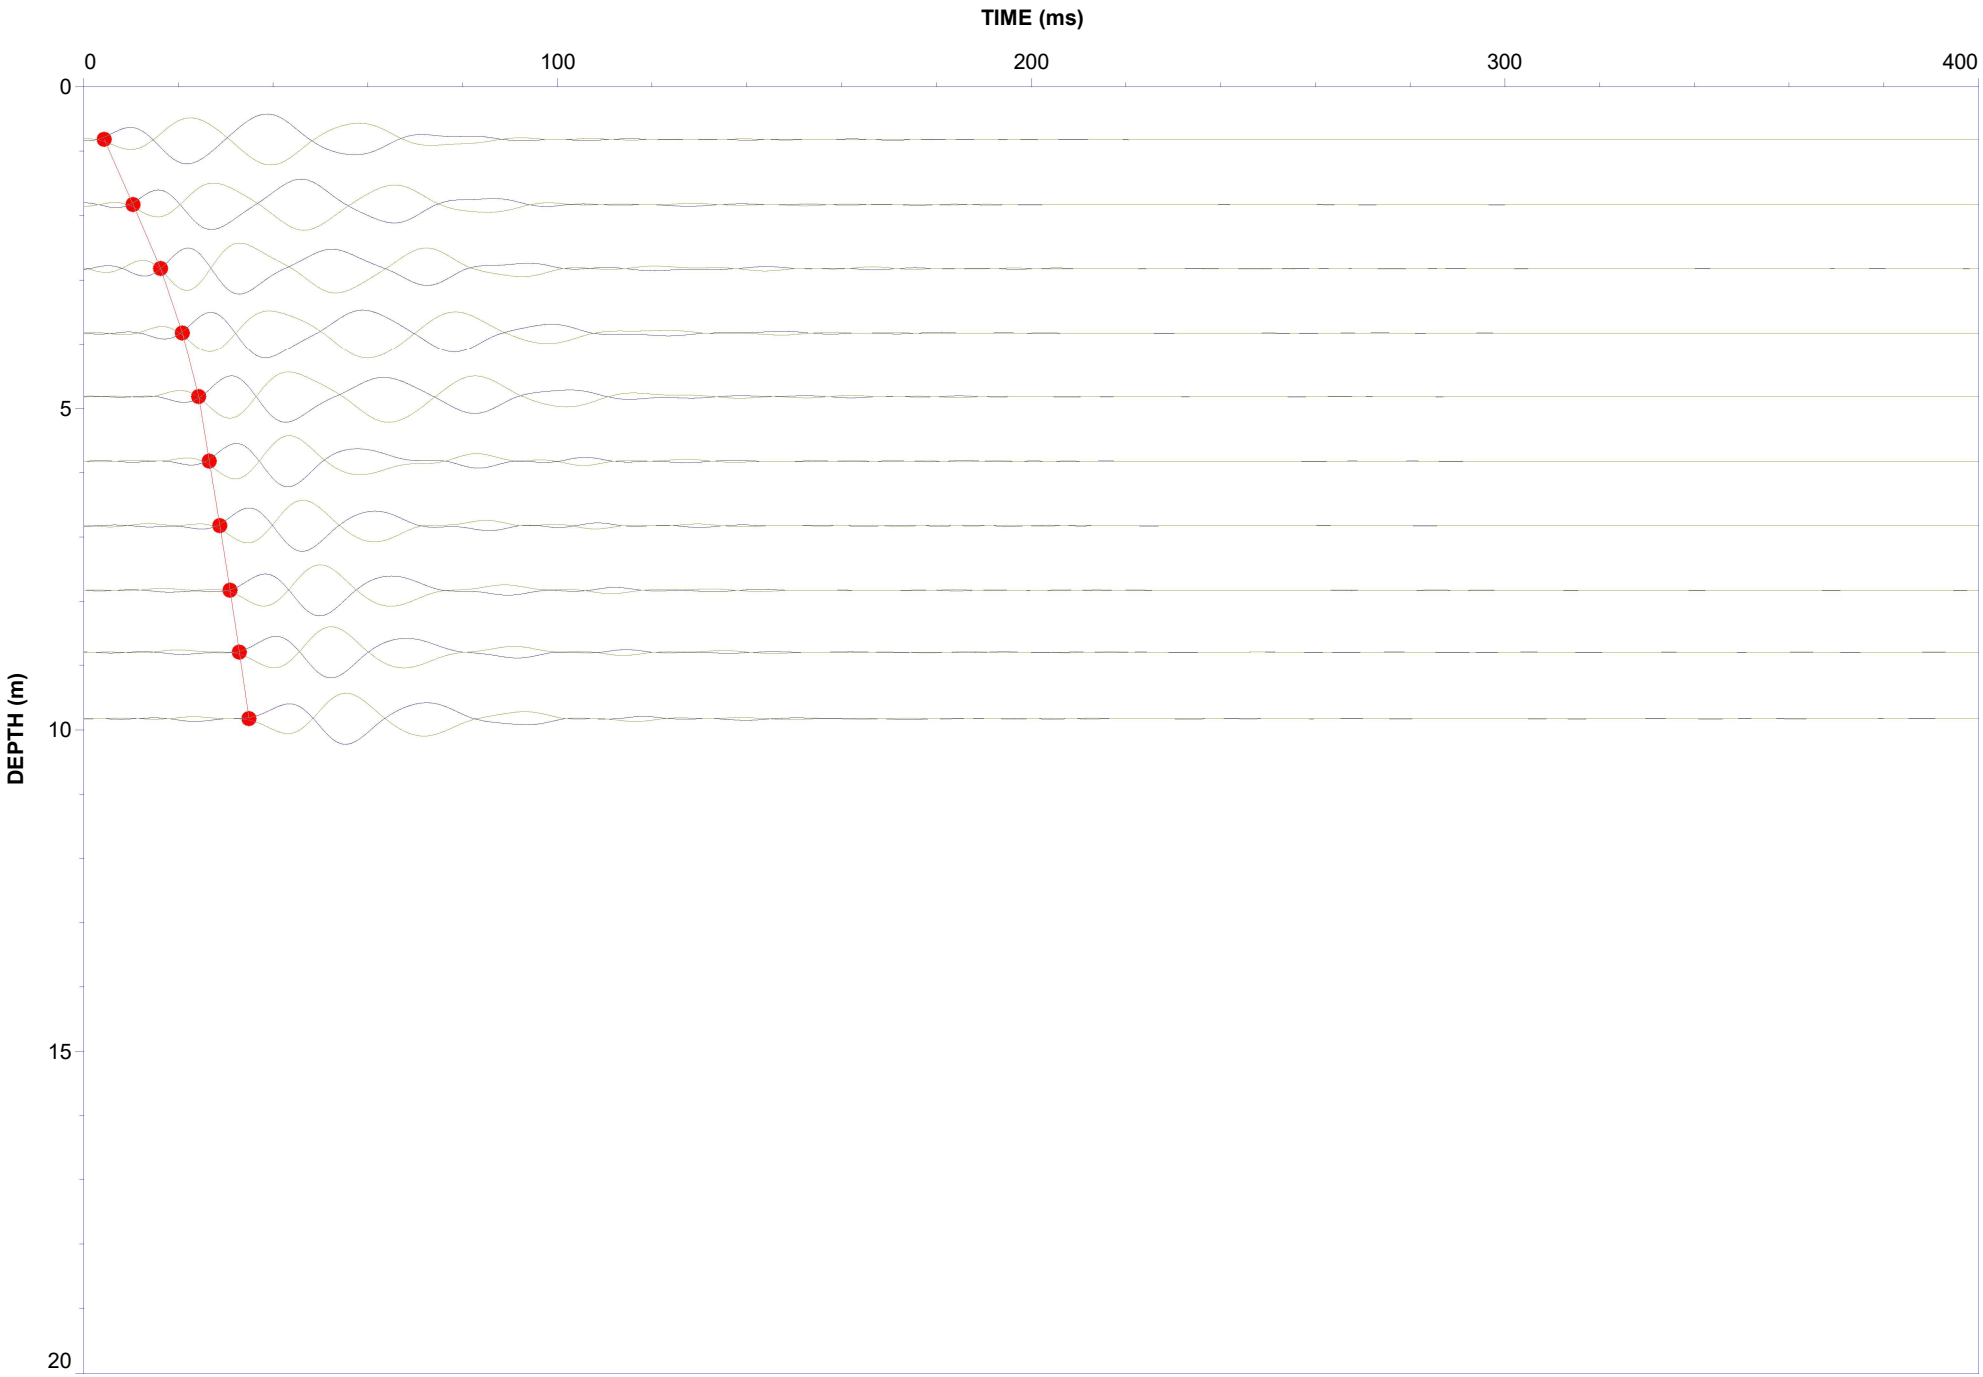


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT133 Filter: 0-250 Hz
Date: 24-Mar-2022

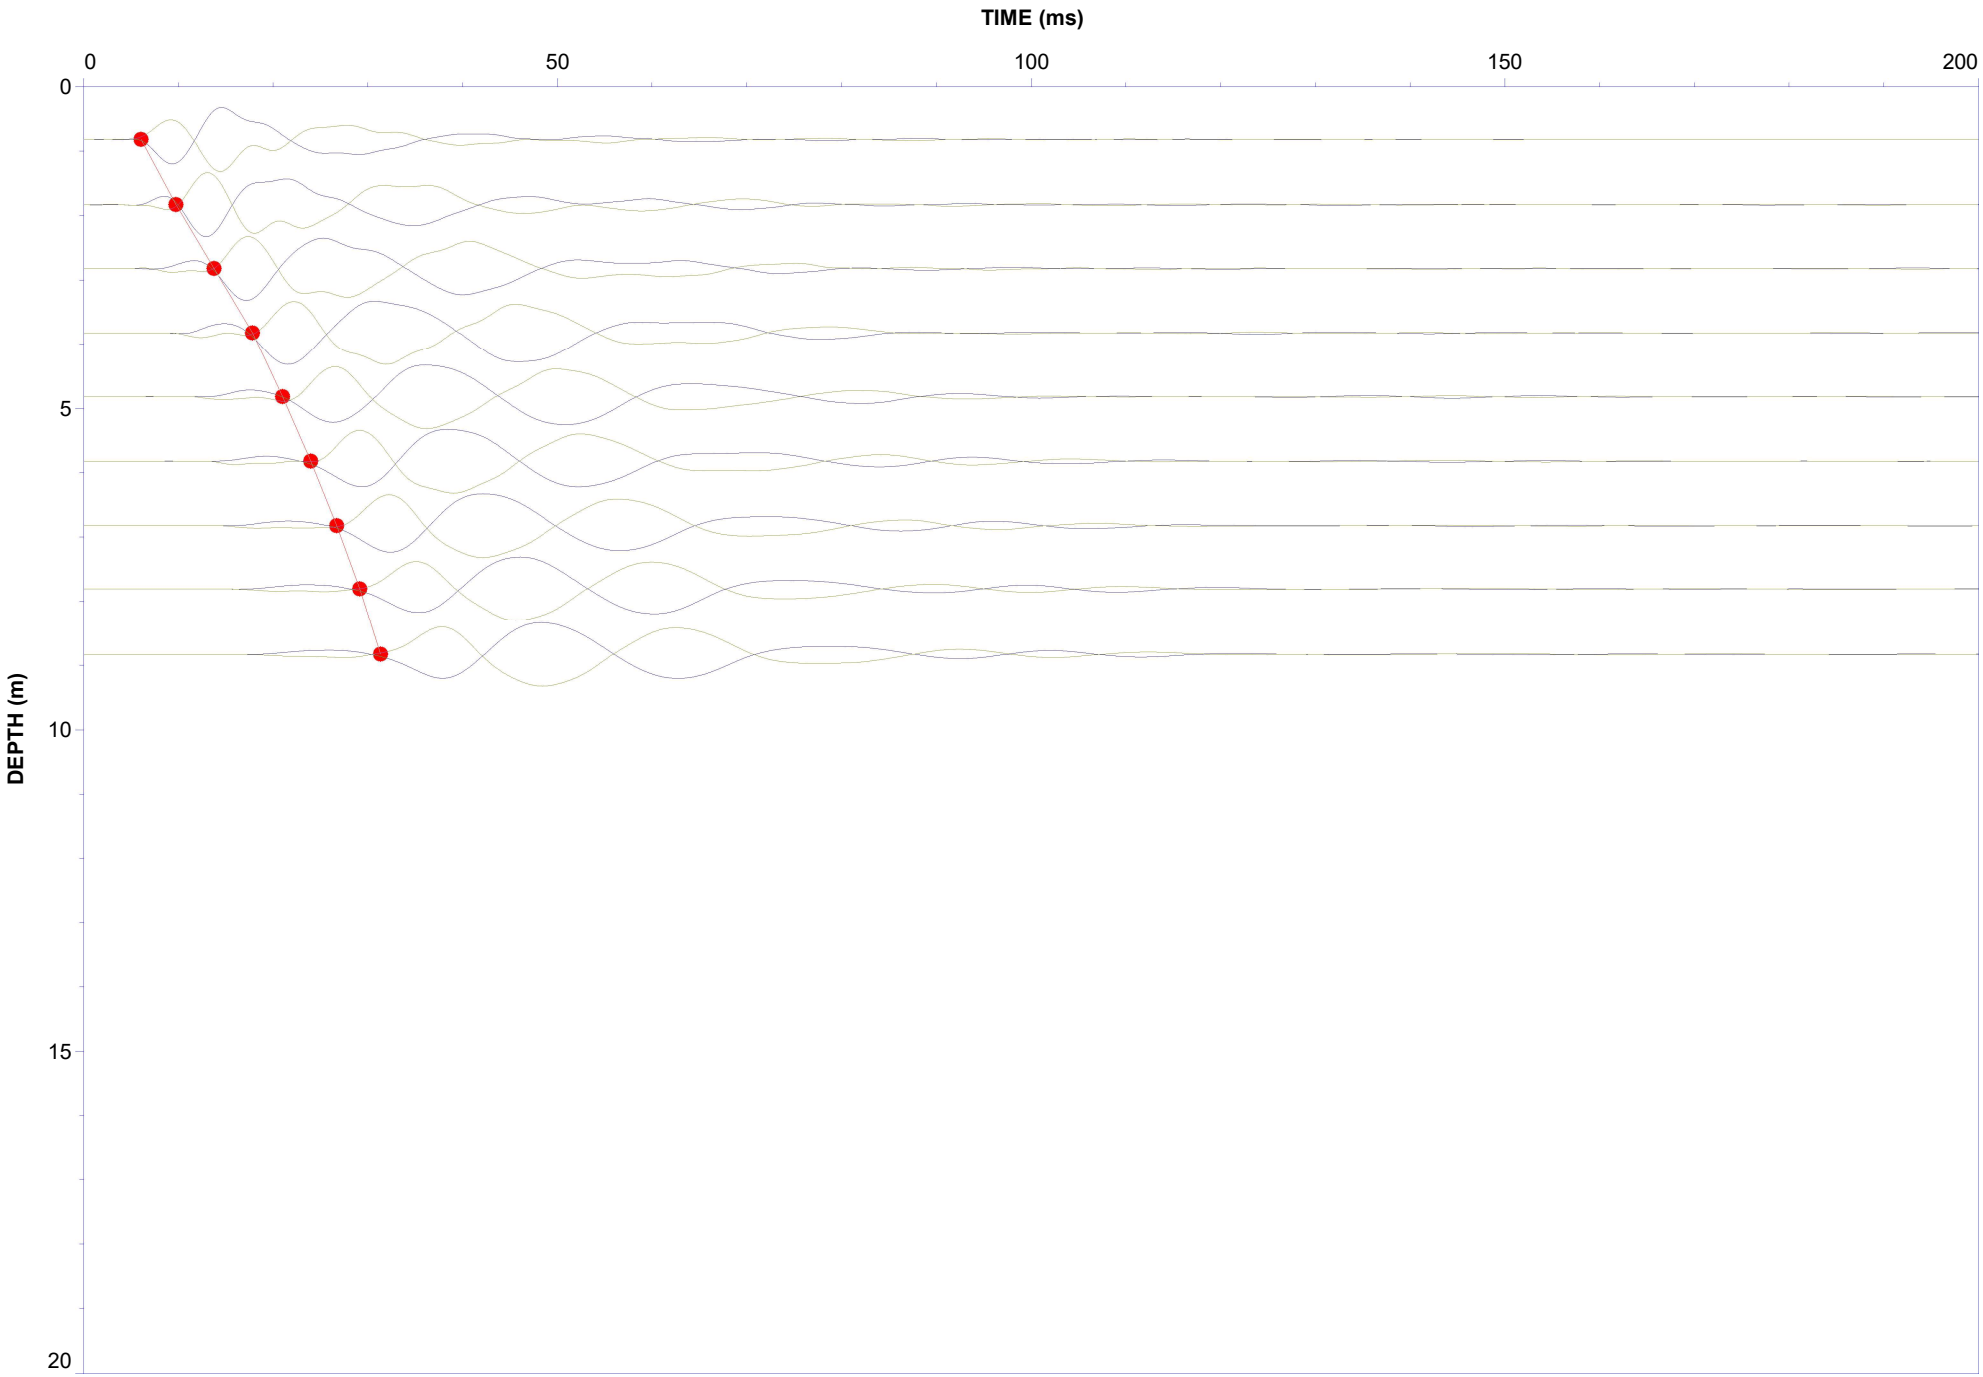


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT138 Filter: 0-150 Hz
Date: 24-Mar-2022

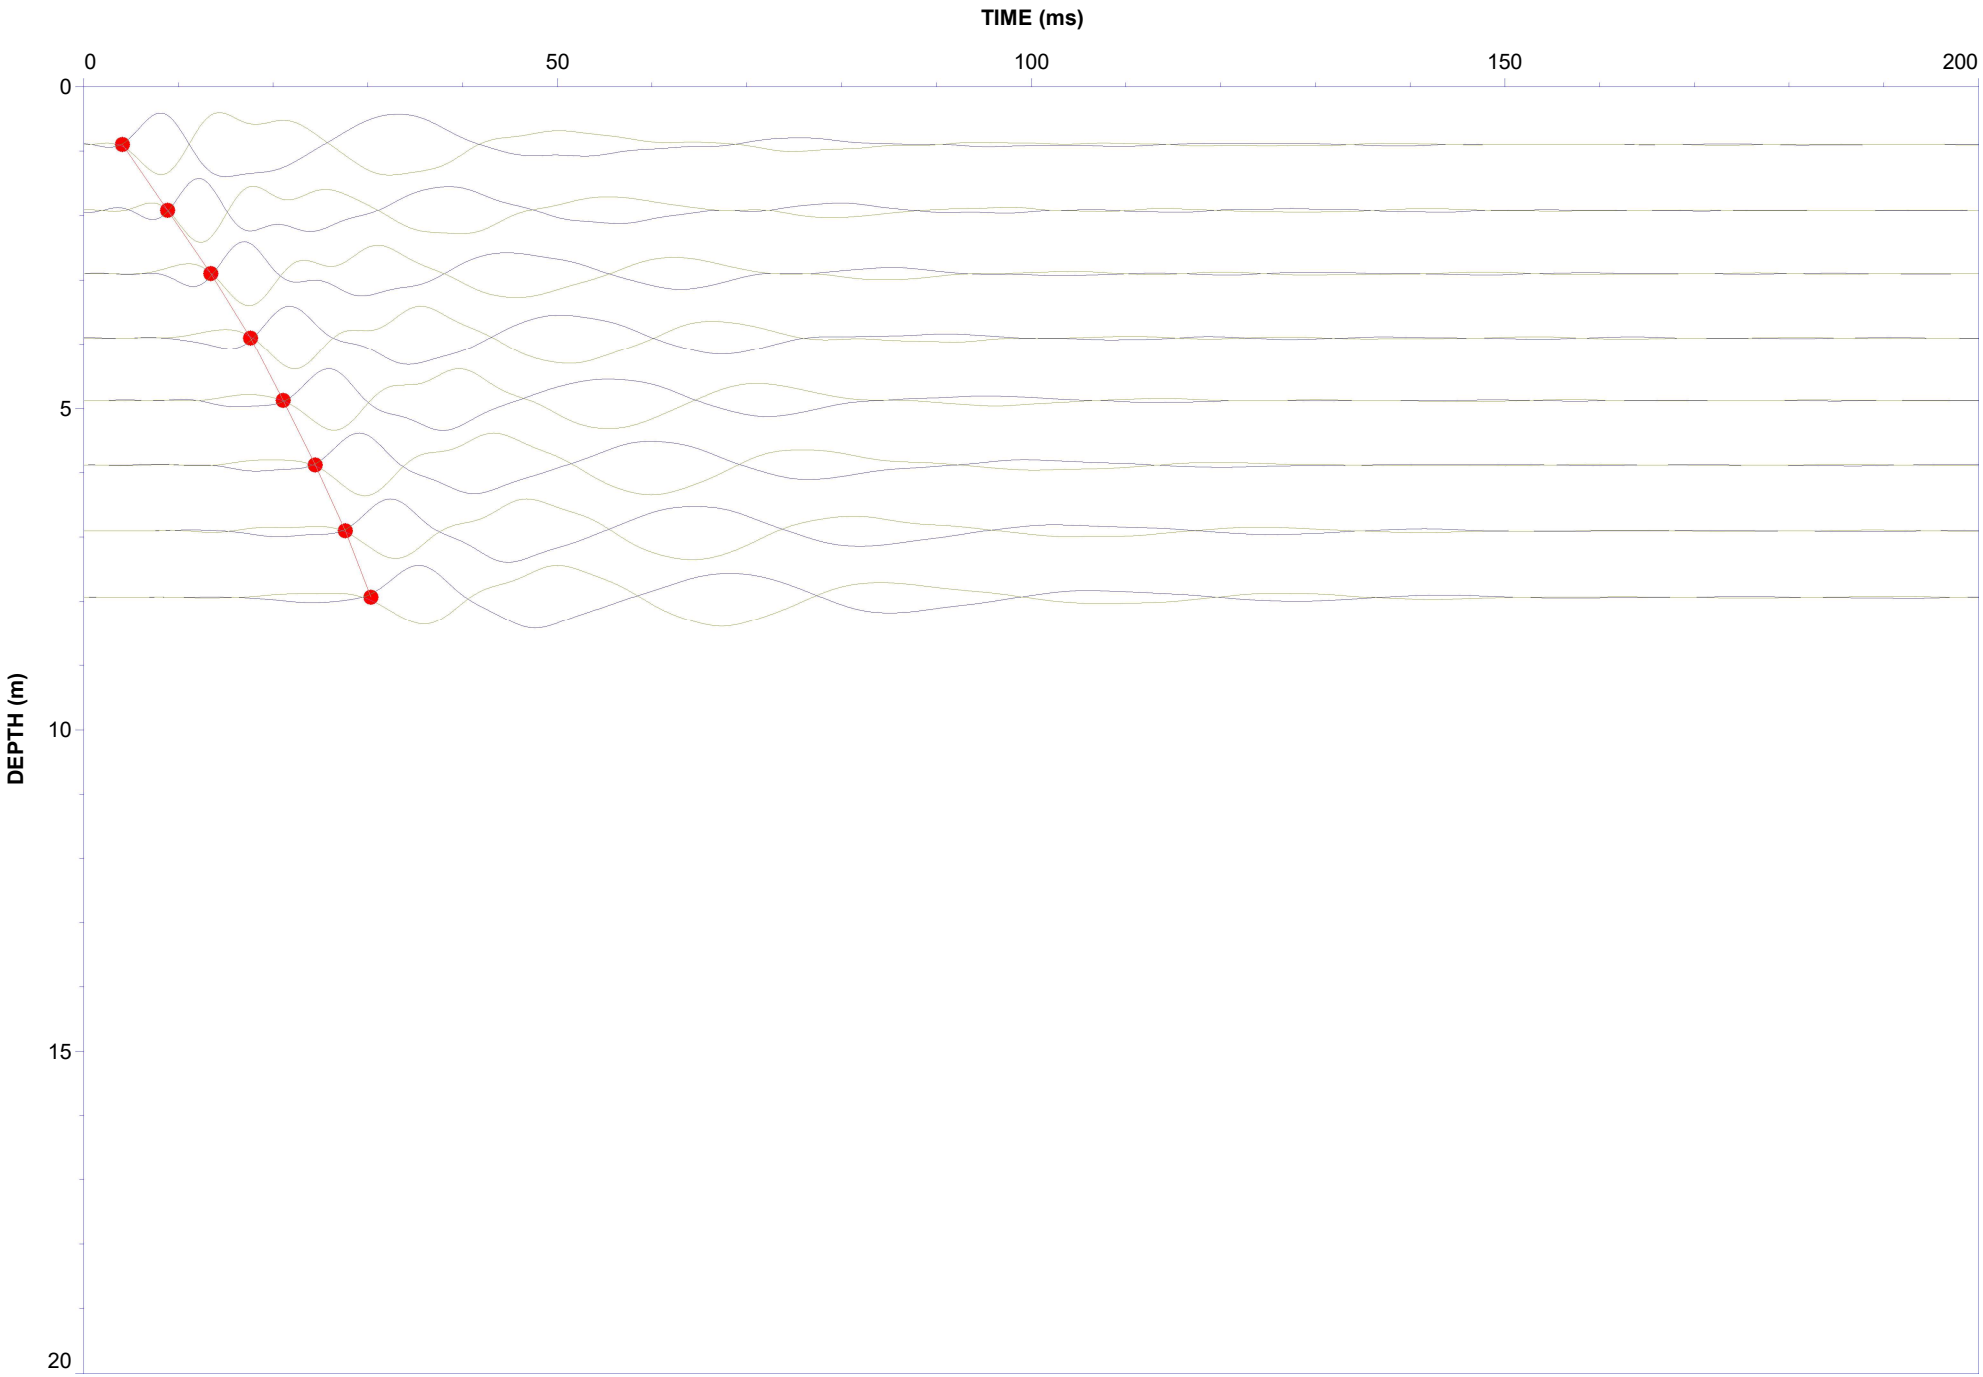


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT144 Filter: 0-200 Hz
Date: 25-Mar-2022

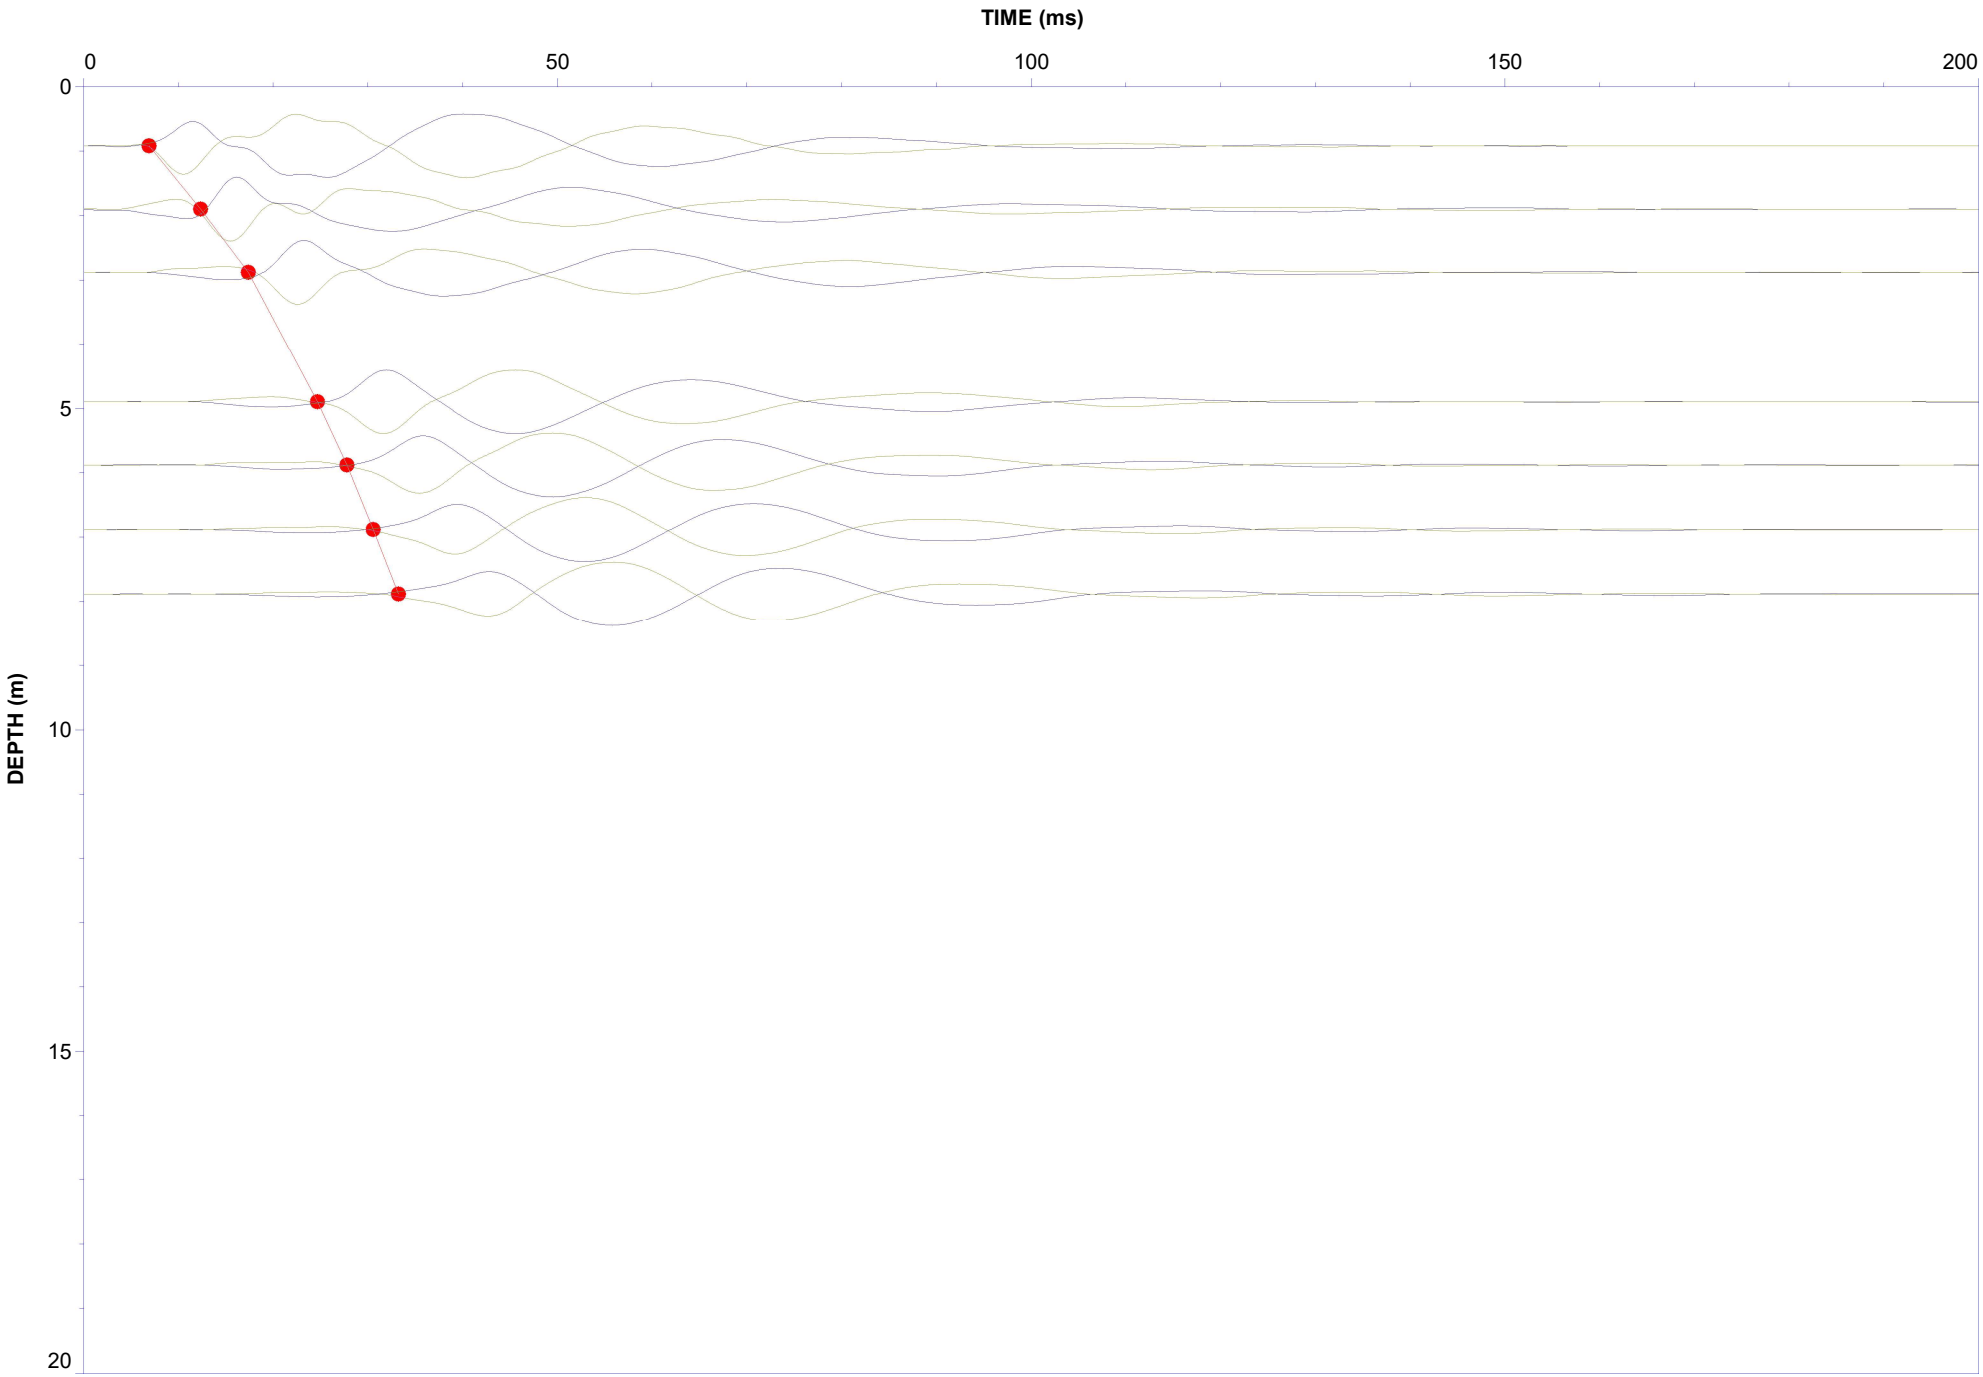


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT204 Filter: 0-150 Hz
Date: 29-Mar-2022

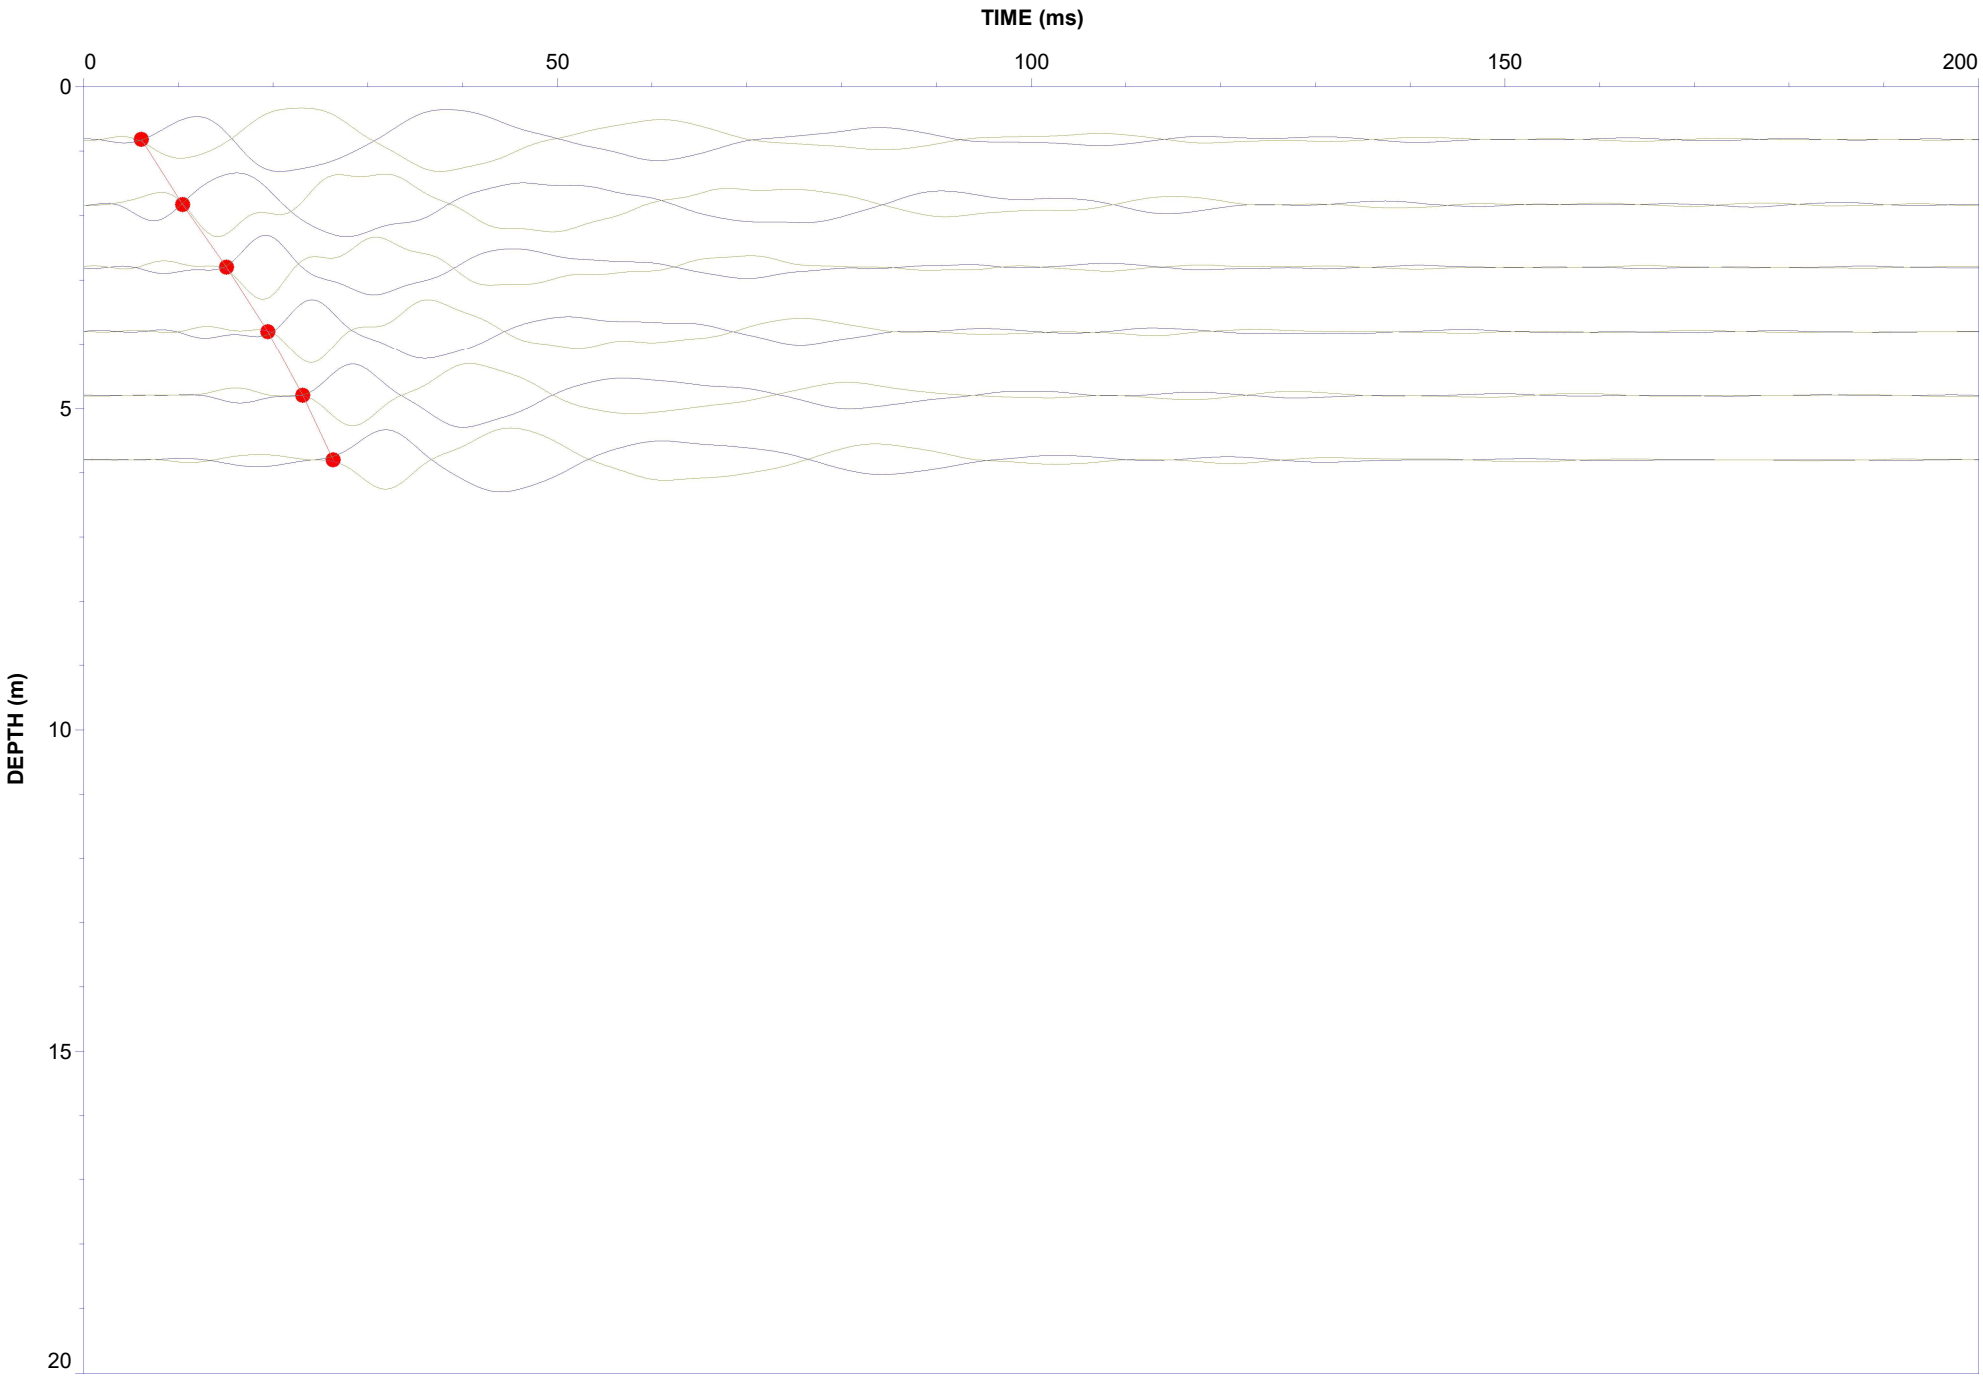


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT209 Filter: 0-250 Hz
Date: 29-Mar-2022

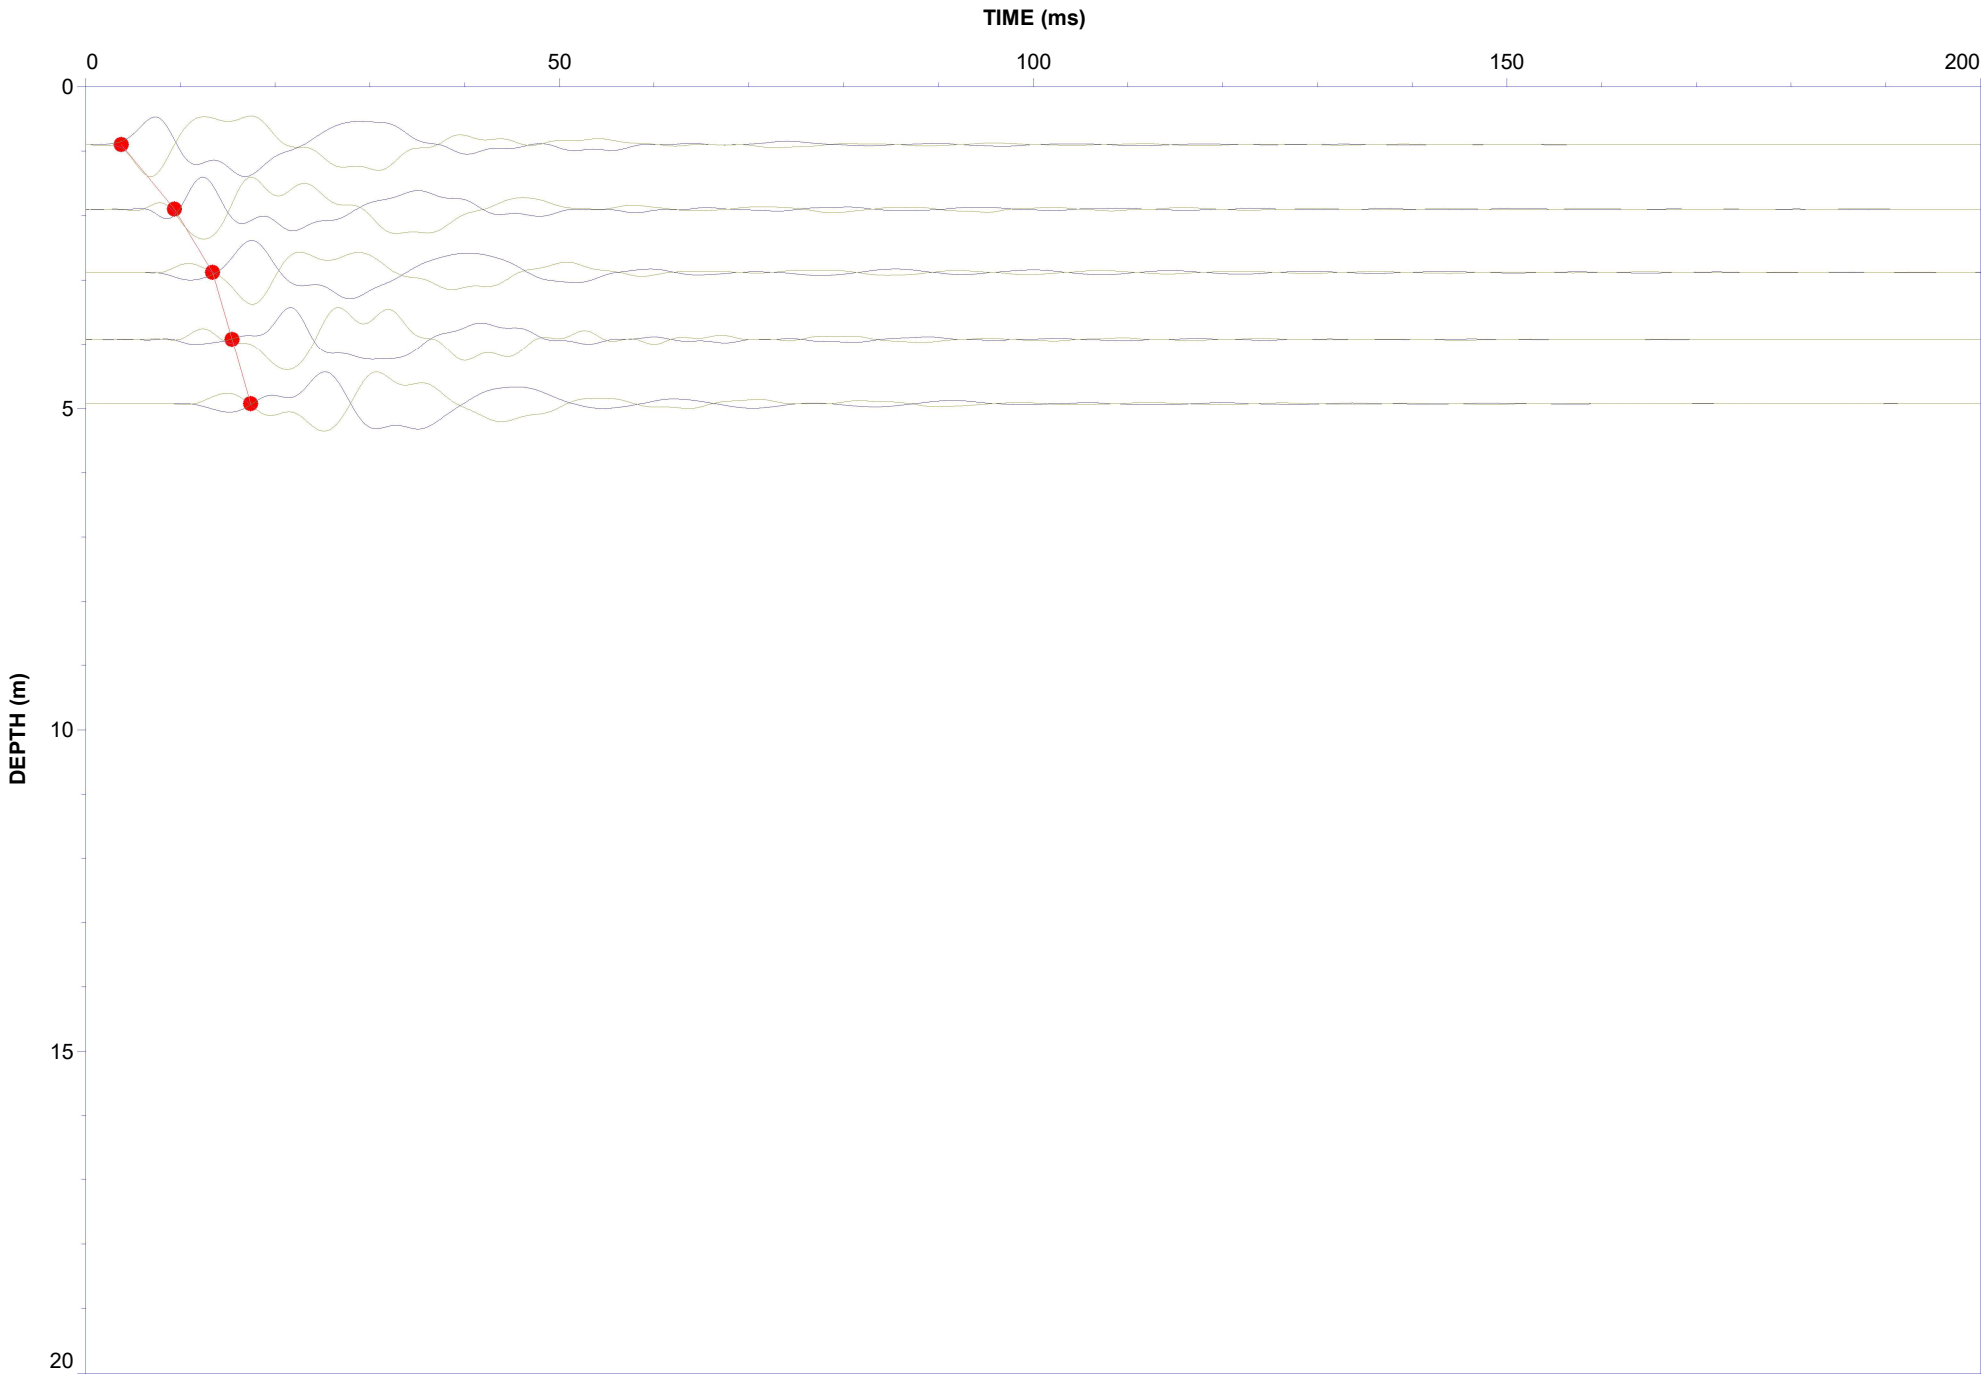


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT215 Filter: 0-150 Hz
Date: 30-Mar-2022

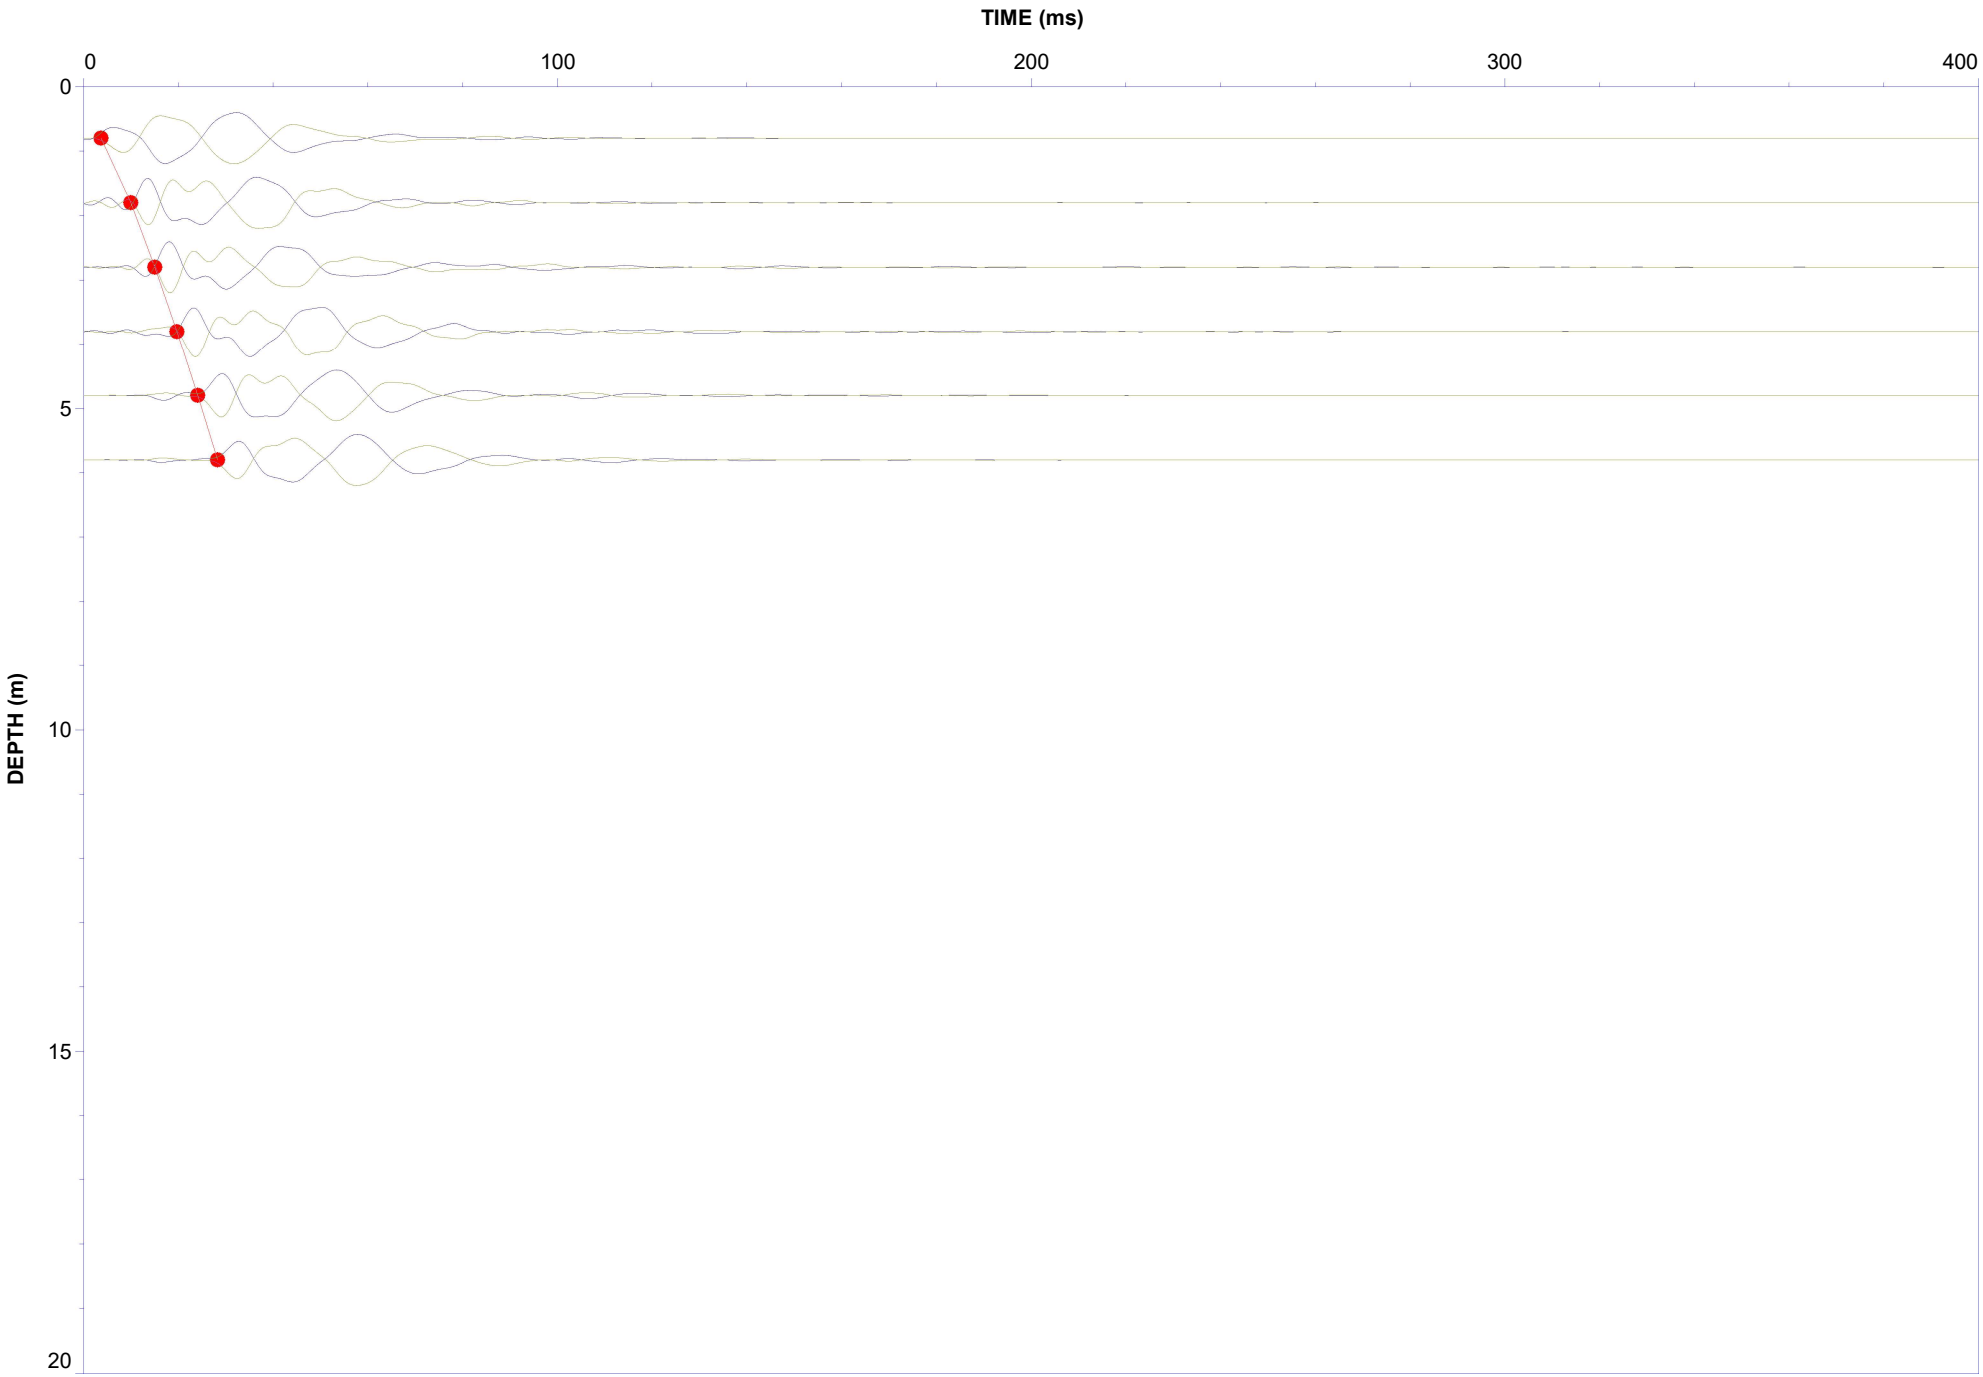


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT221 Filter: 0-150 Hz
Date: 30-Mar-2022

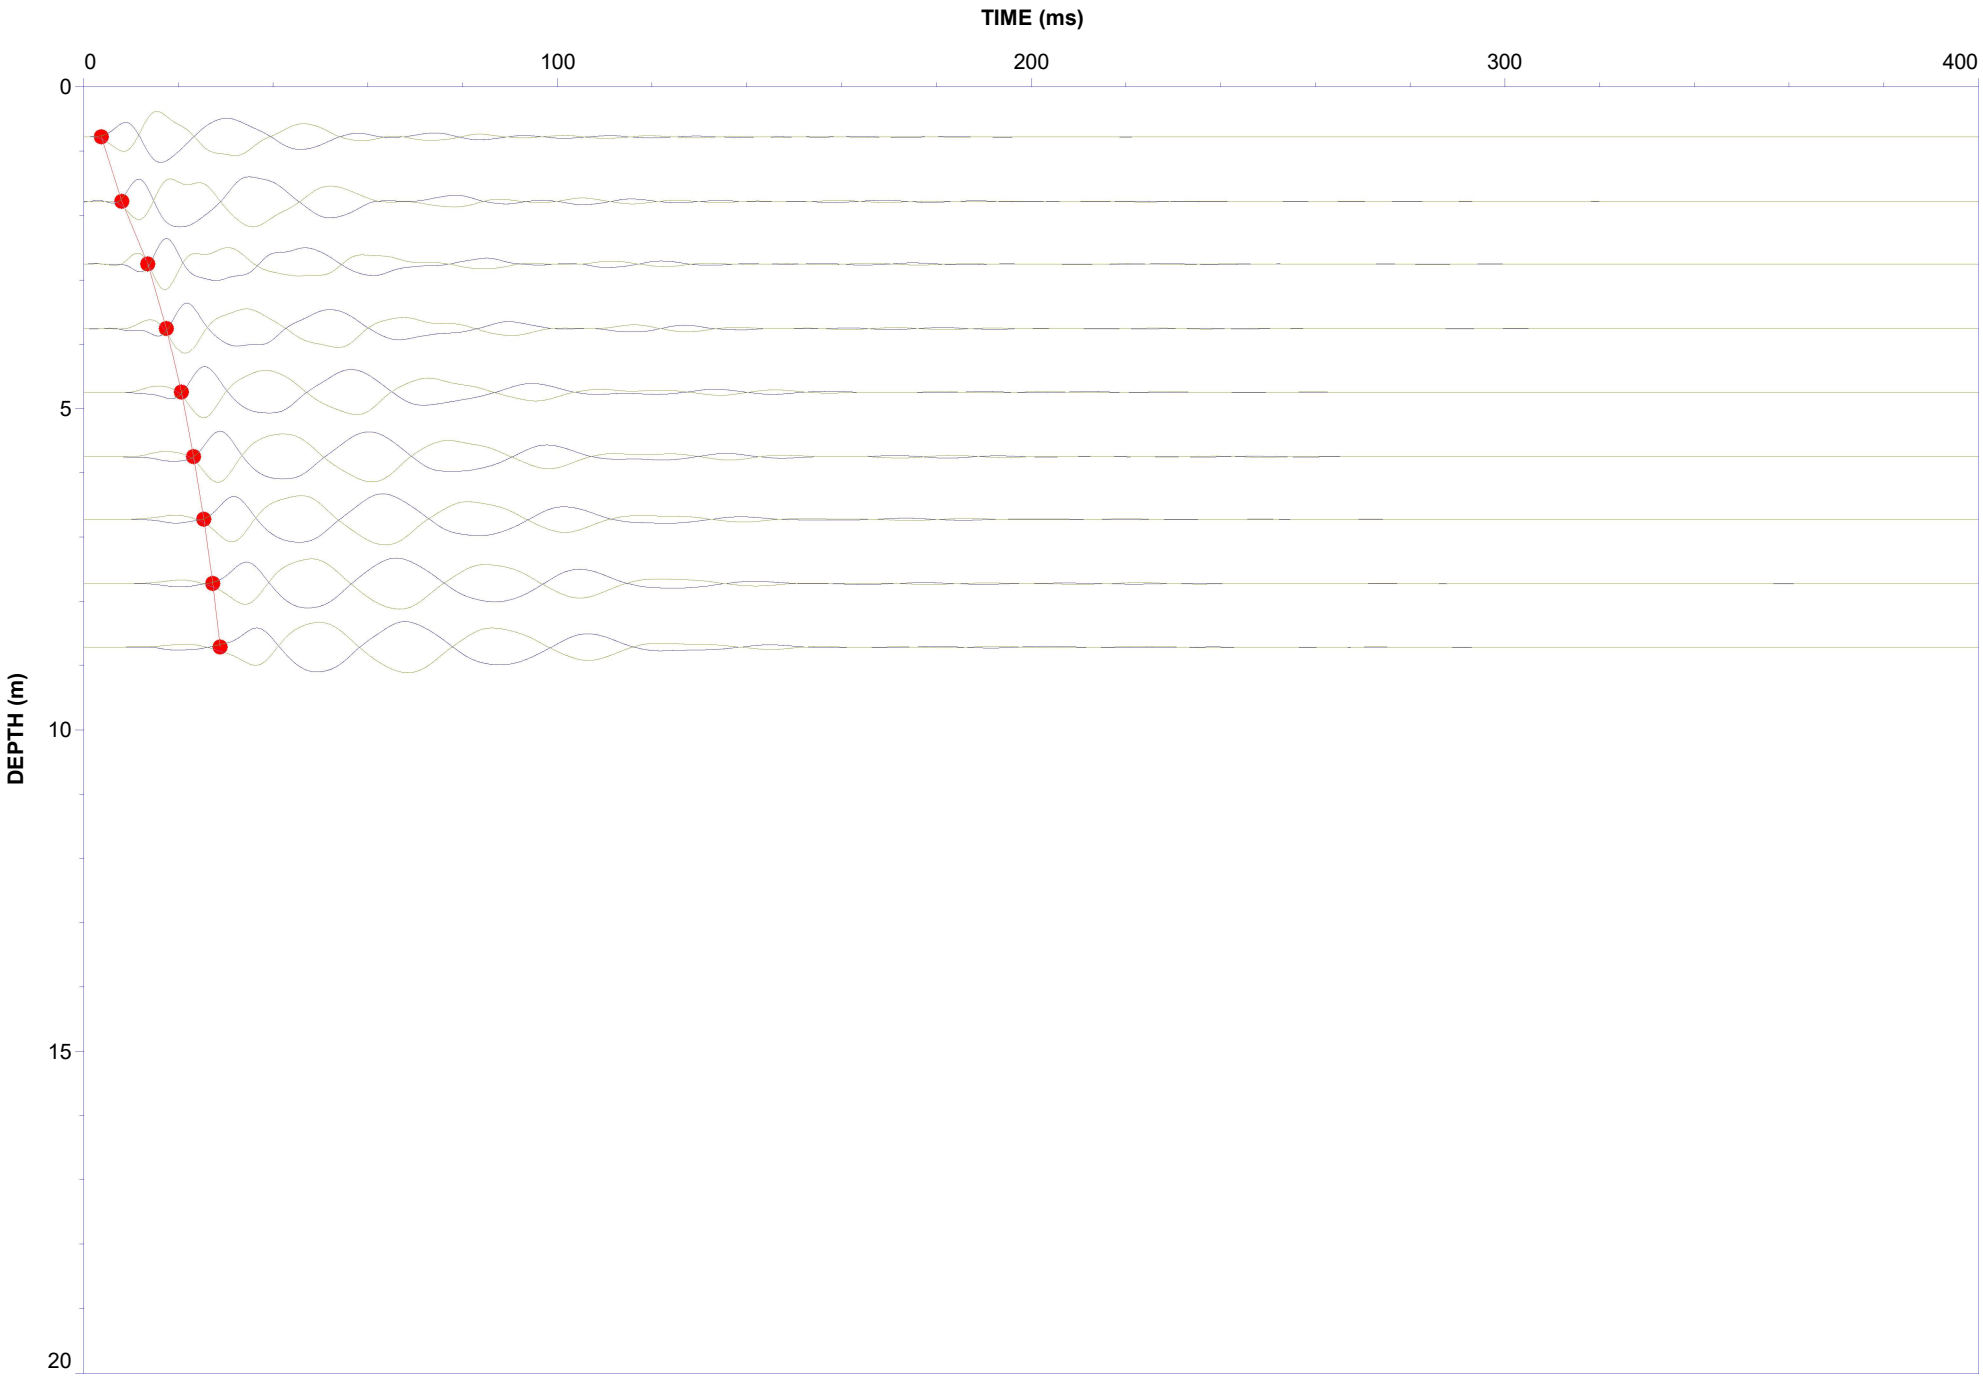


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT227 Filter: 0-150 Hz
Date: 31-Mar-2022

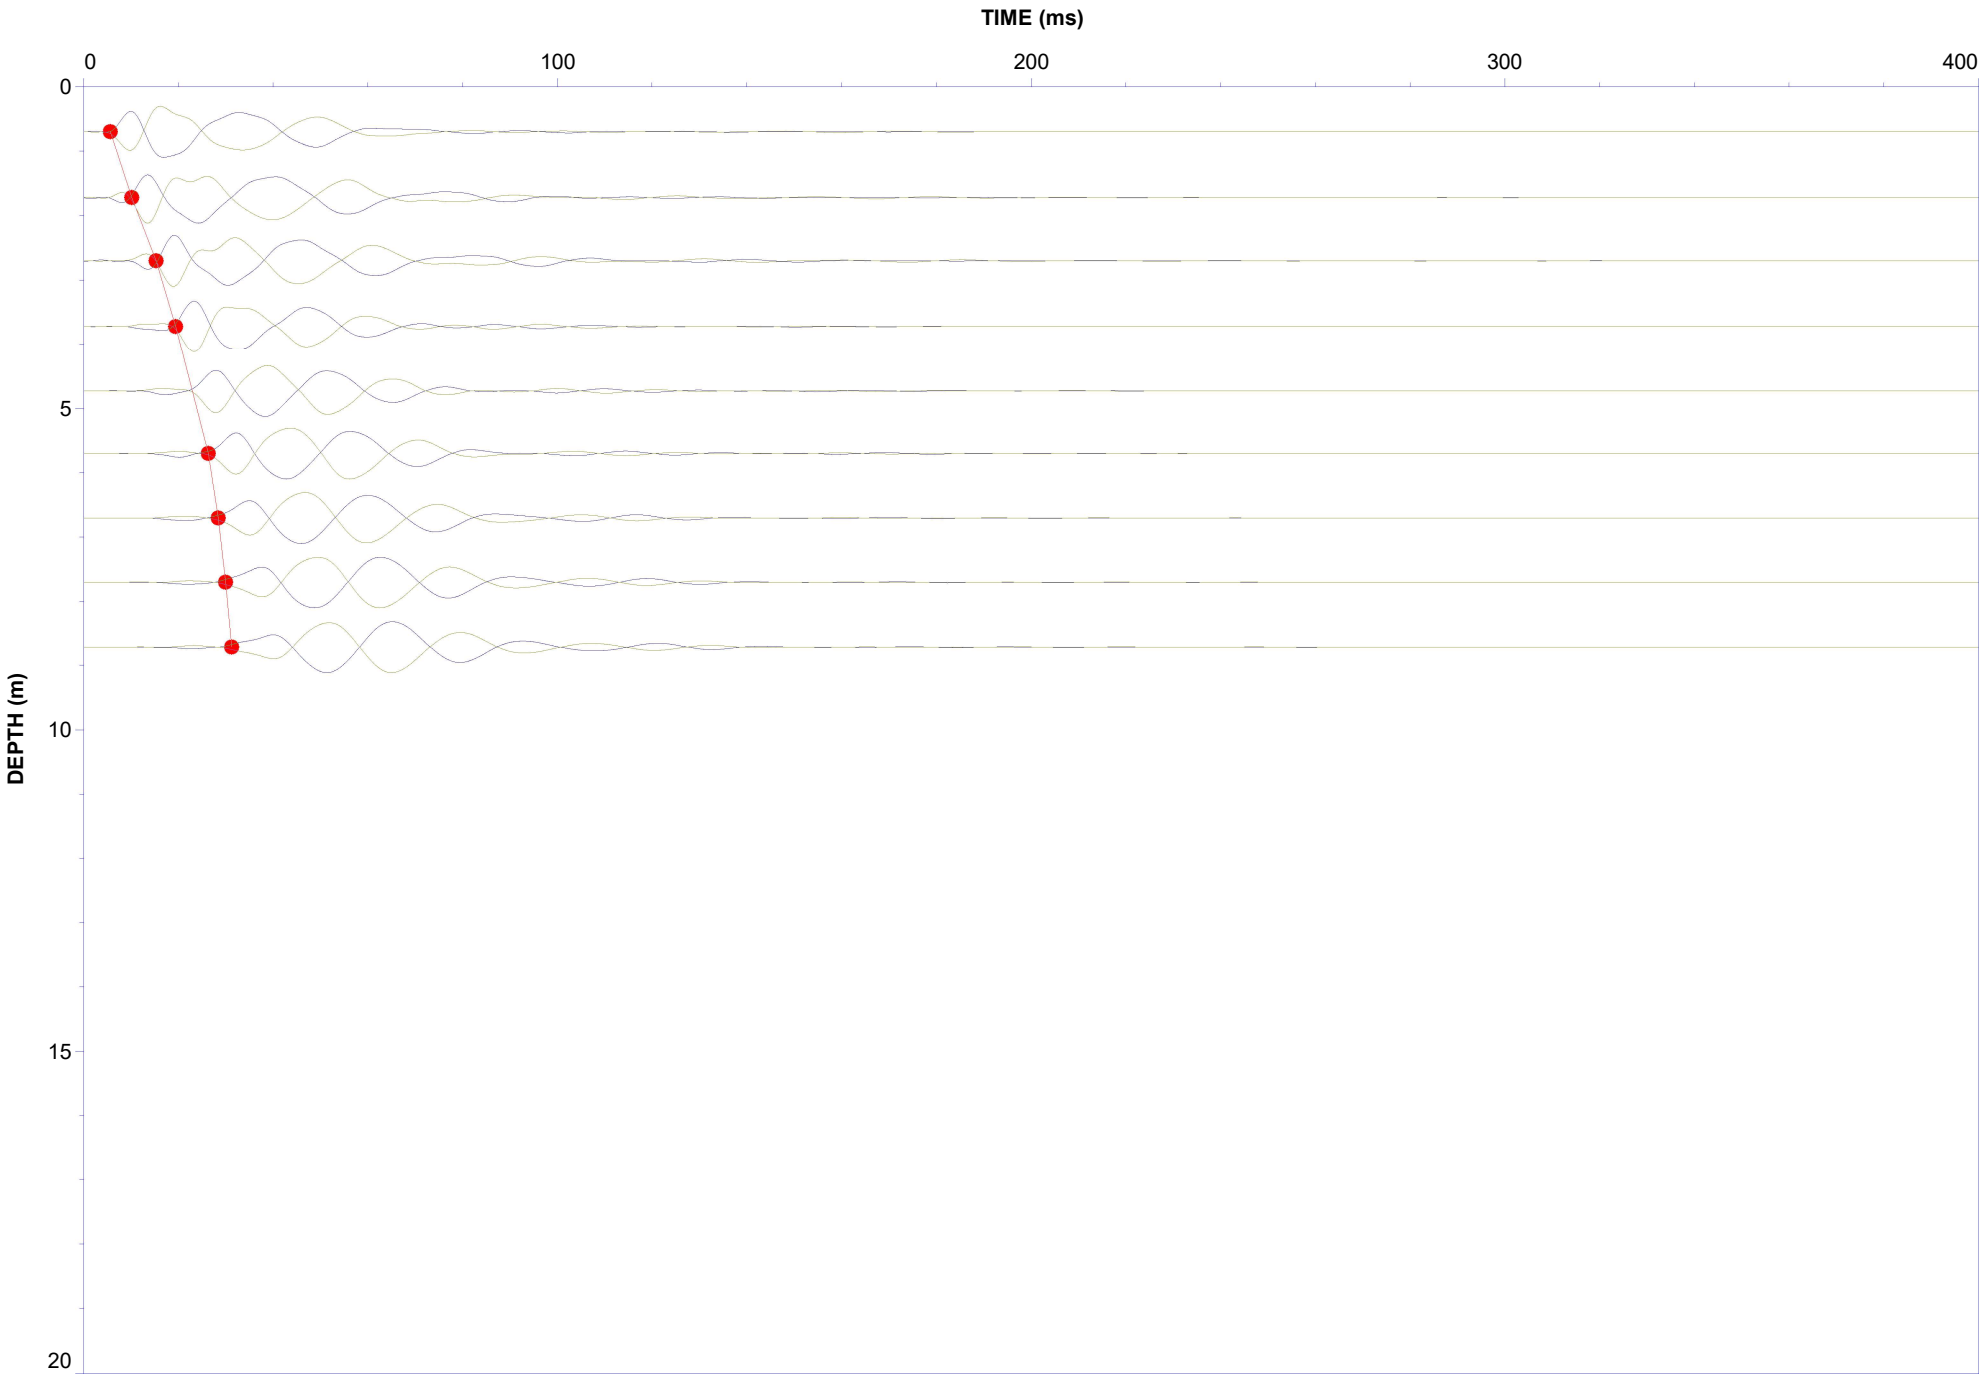


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT233 Filter: 0-250 Hz
Date: 26-Mar-2022

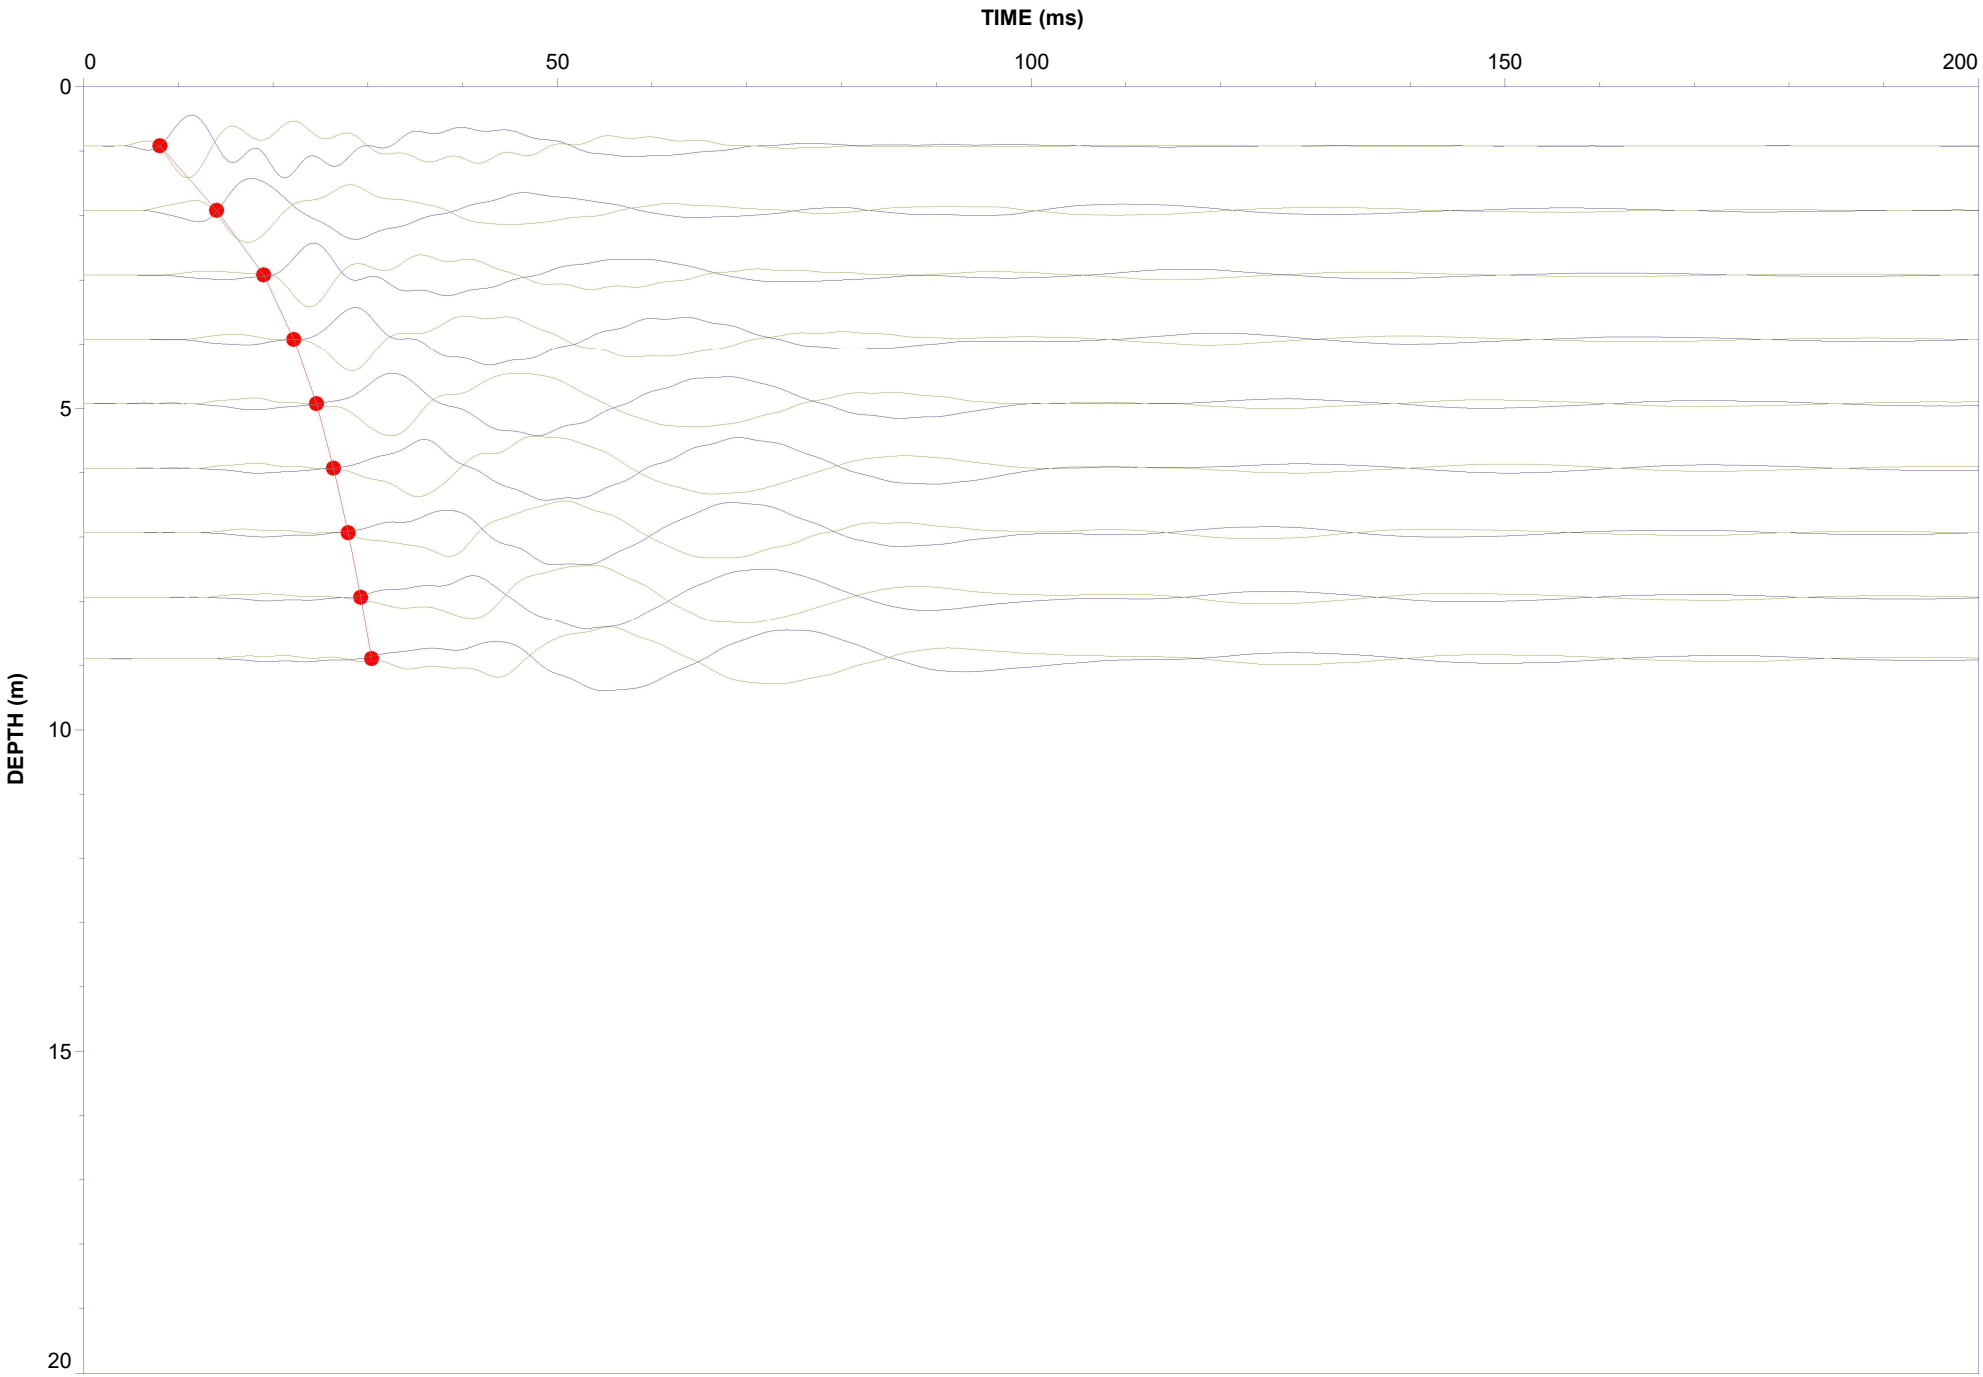


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT239 Filter: 0-150 Hz
Date: 27-Mar-2022

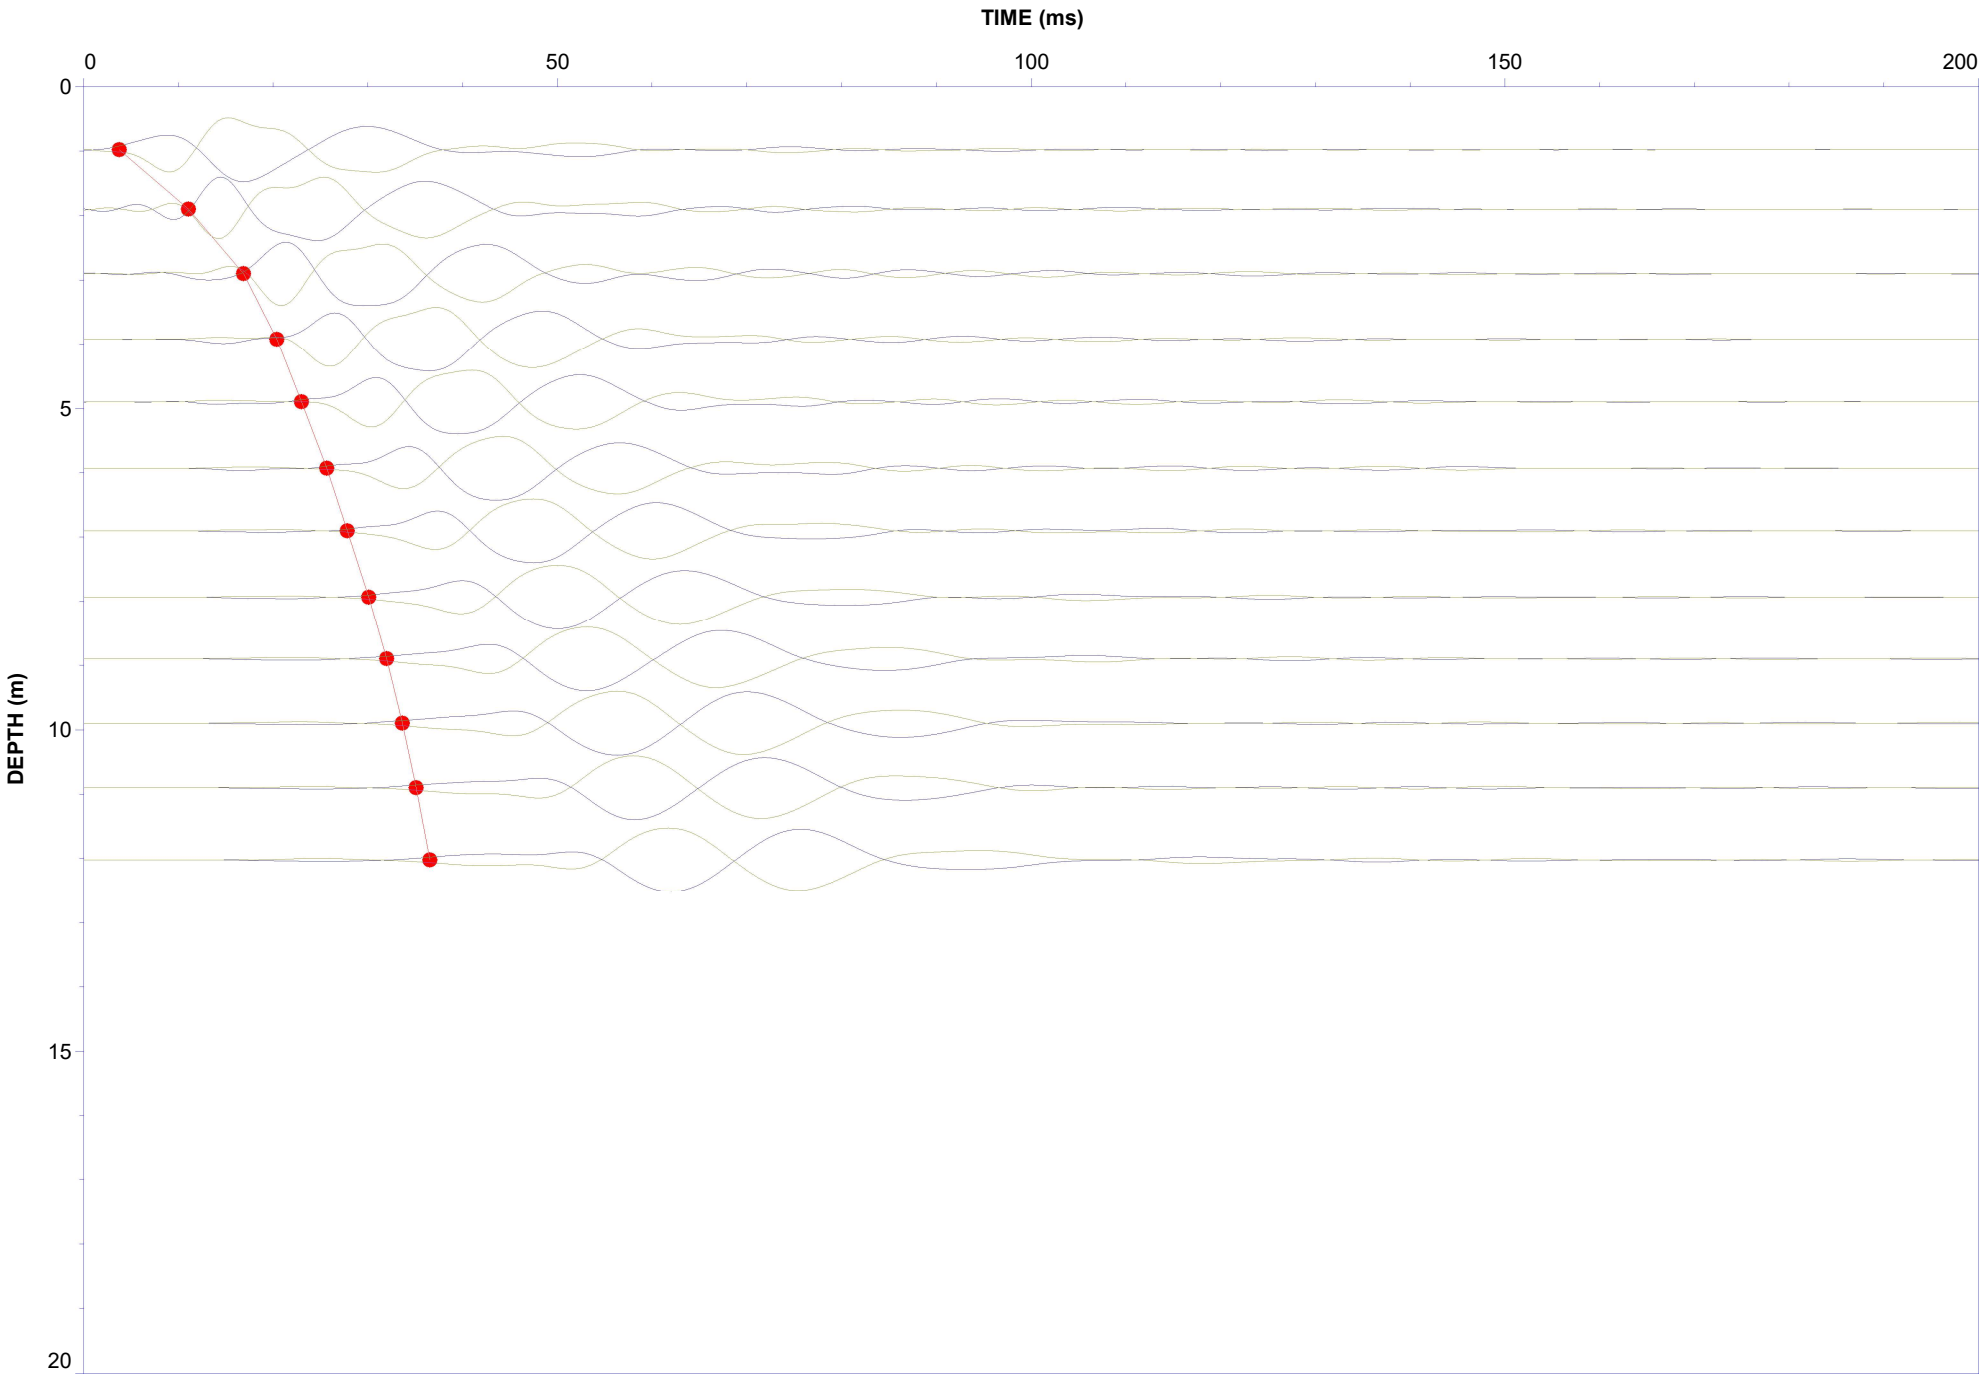


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT245 Filter: 0-250 Hz
Date: 27-Mar-2022

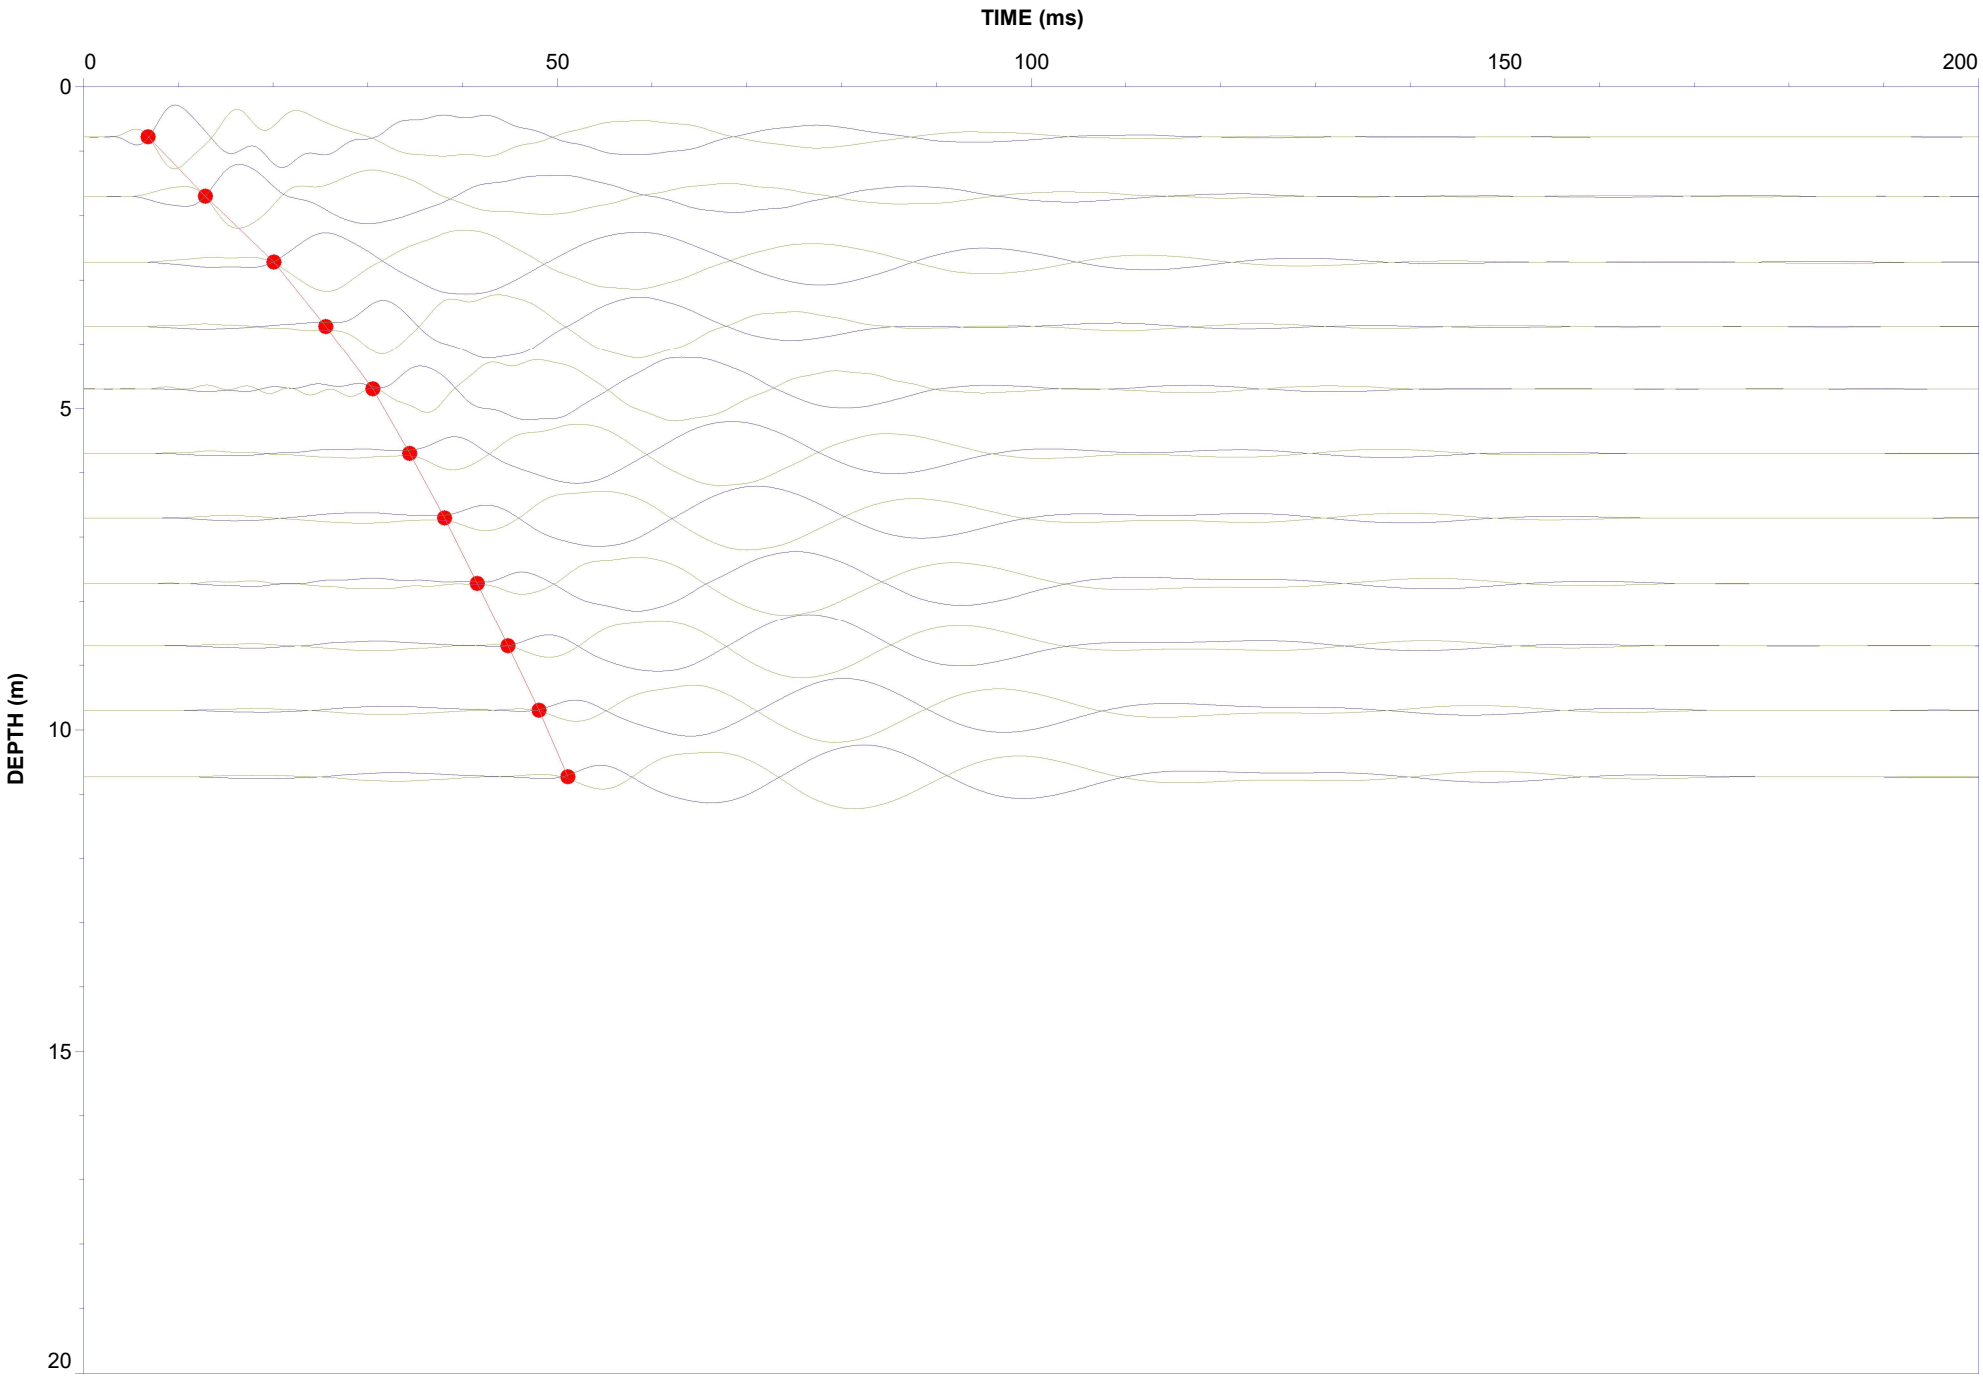


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT252 Filter: 0-150 Hz
Date: 02-Apr-2022

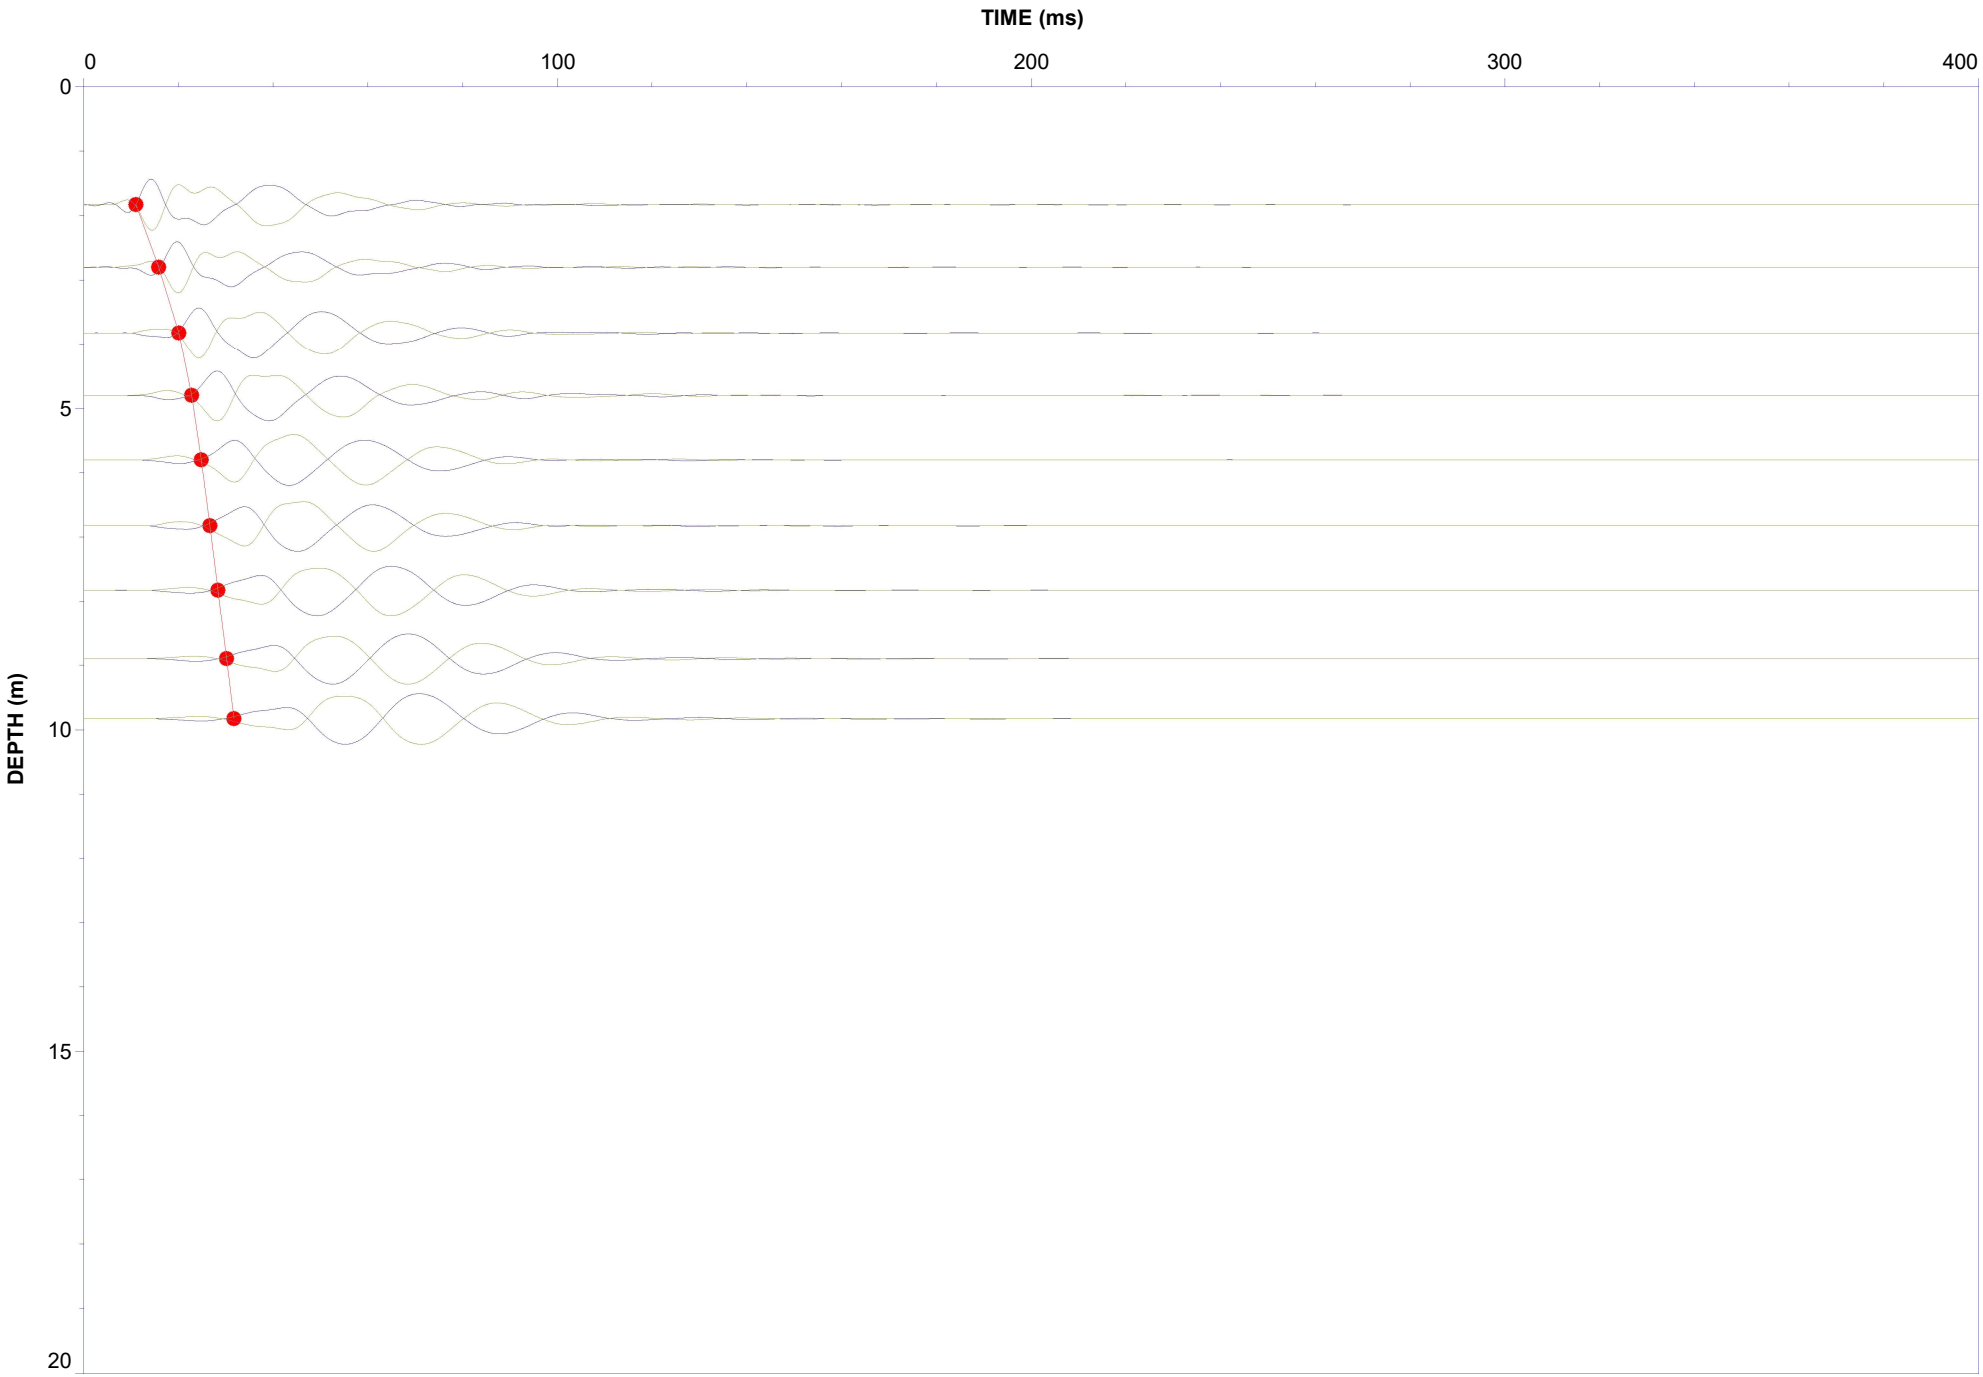


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT256 Filter: 0-150 Hz
Date: 04-Apr-2022

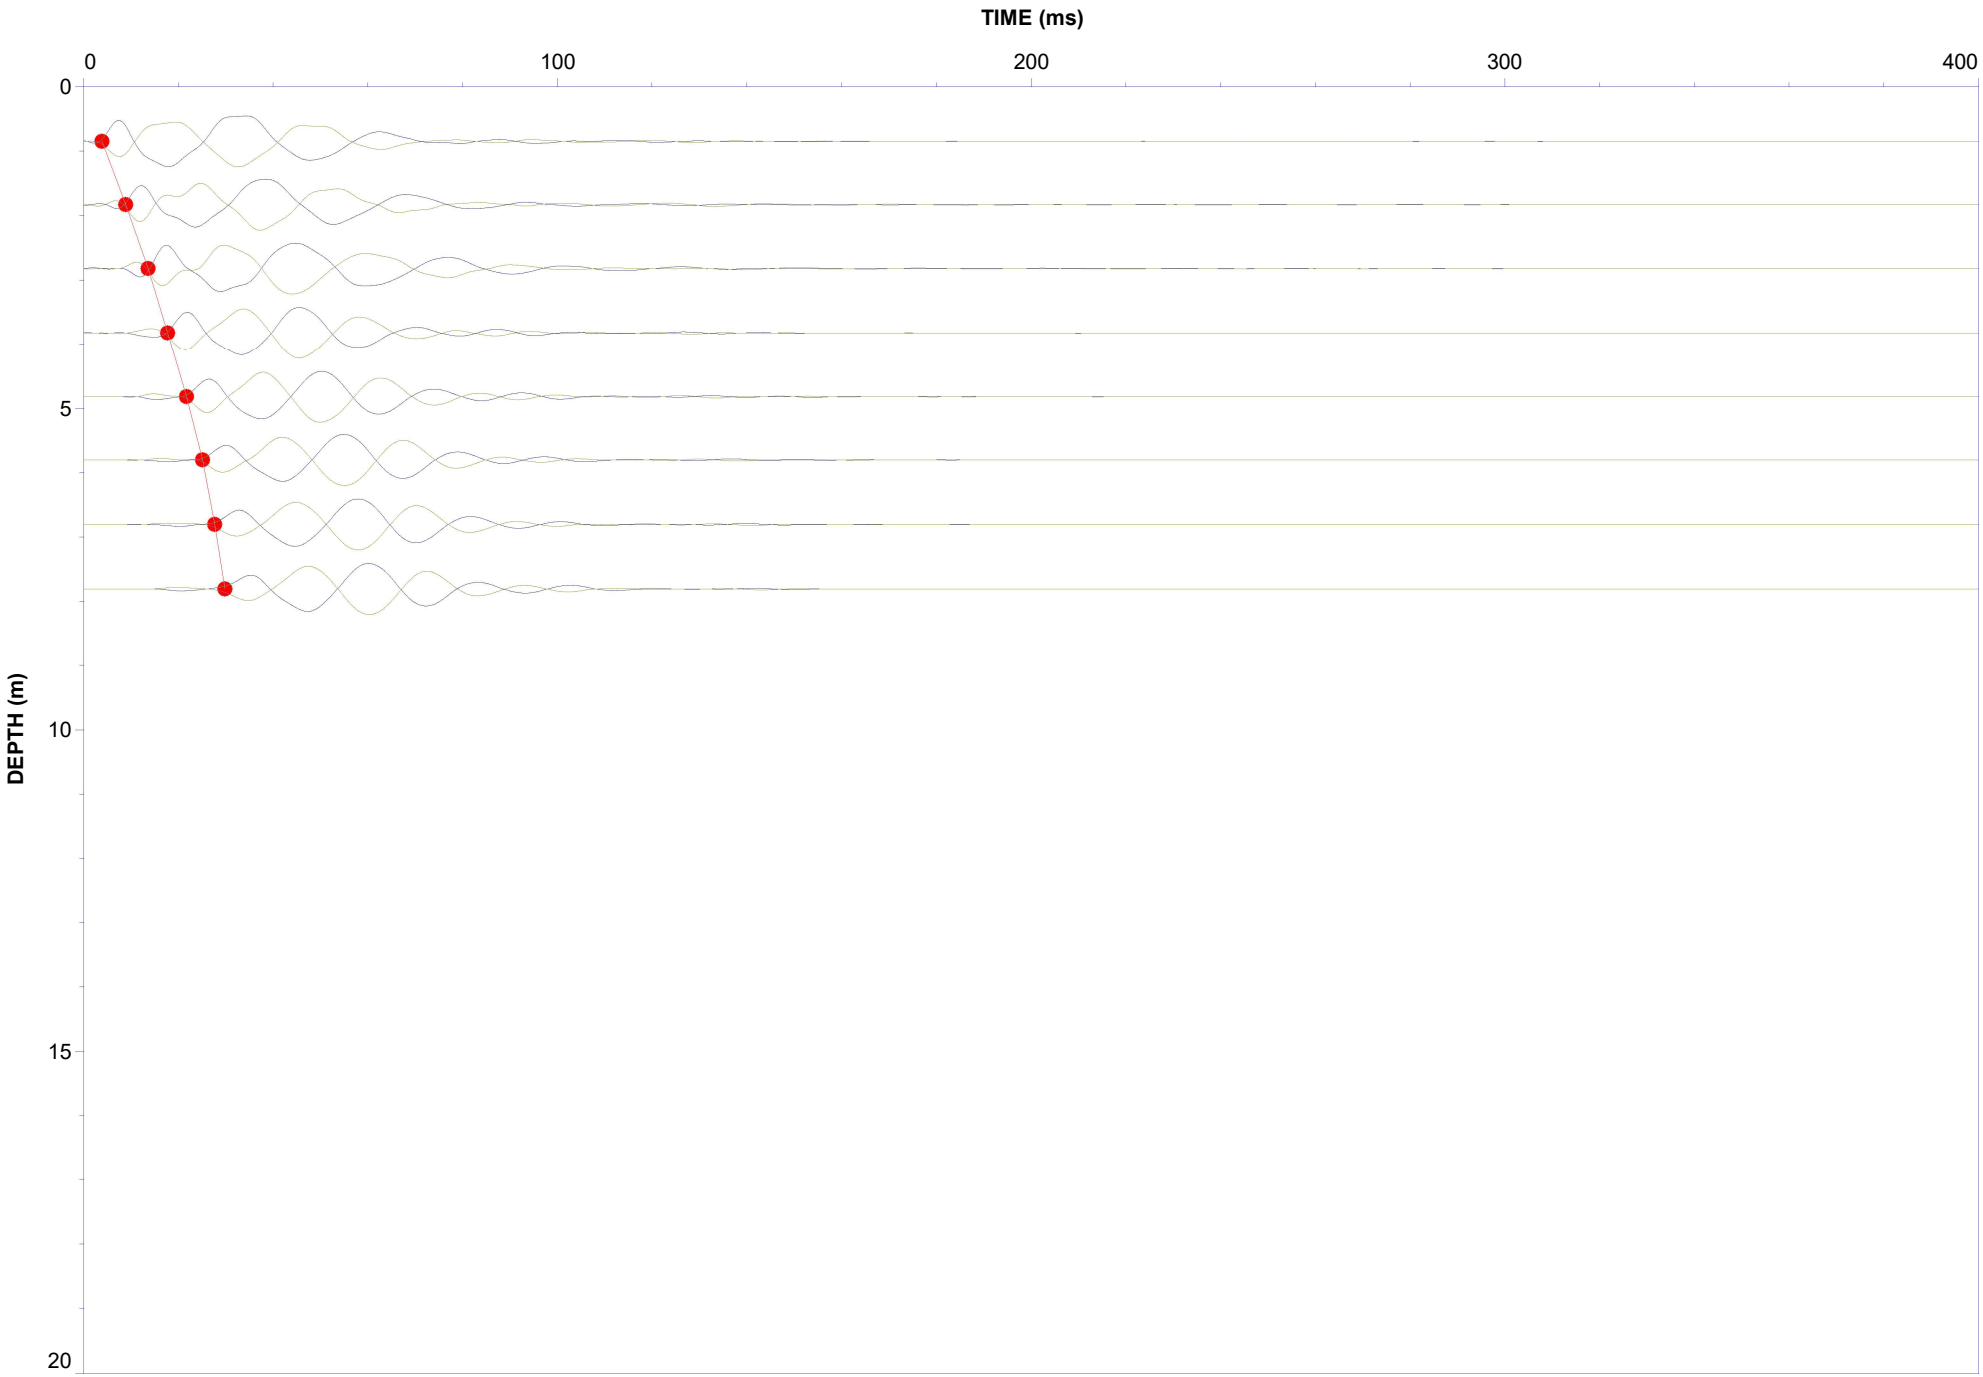


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT302 Filter: 0-150 Hz
Date: 05-Apr-2022

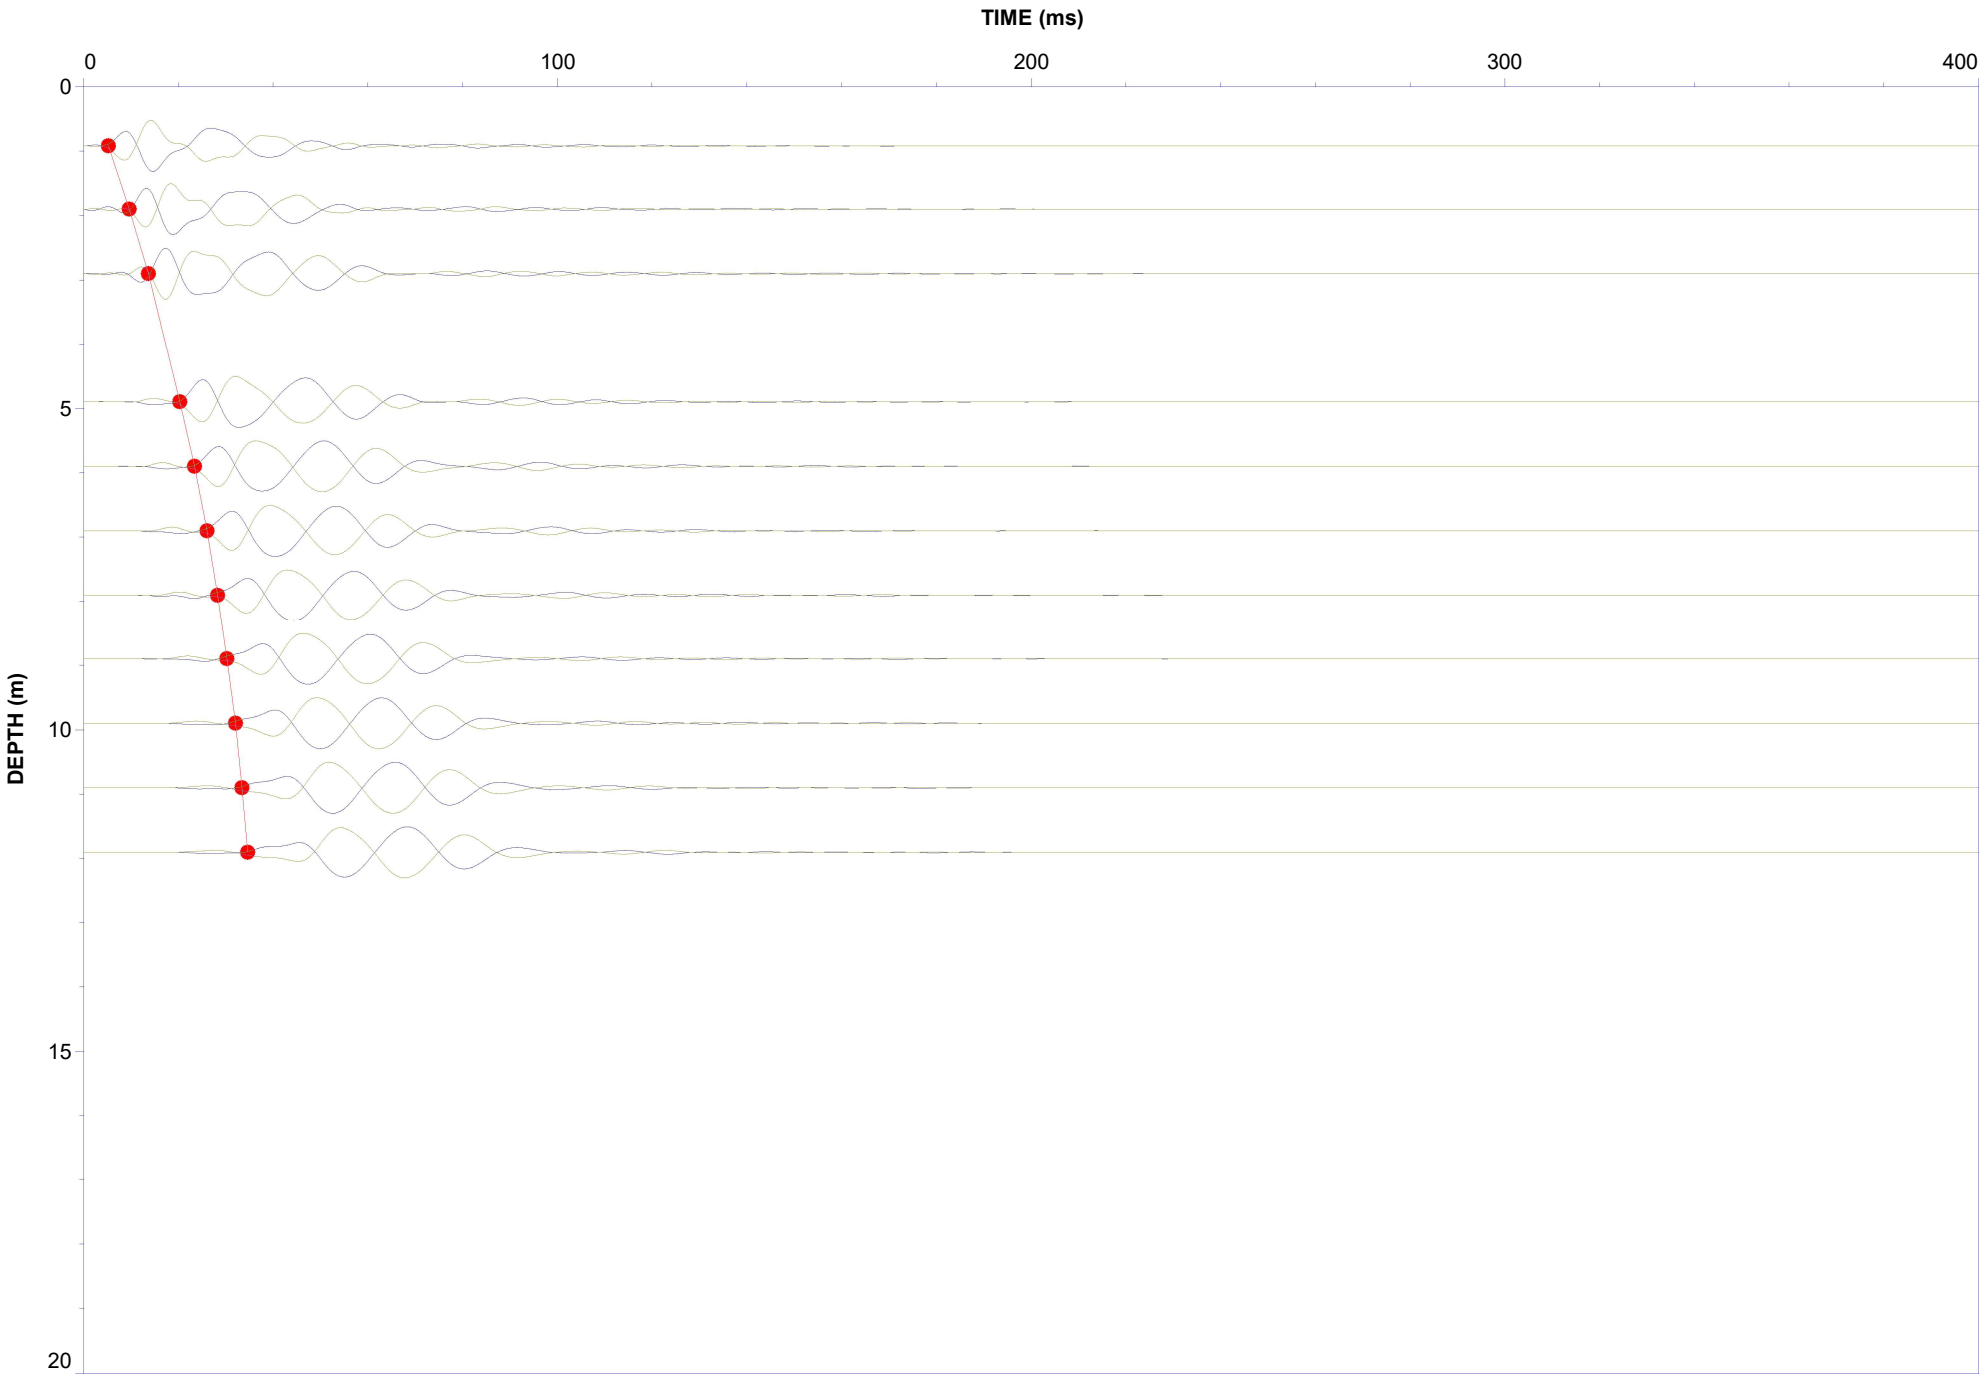


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT308 Filter: 0-150 Hz
Date: 06-Apr-2022

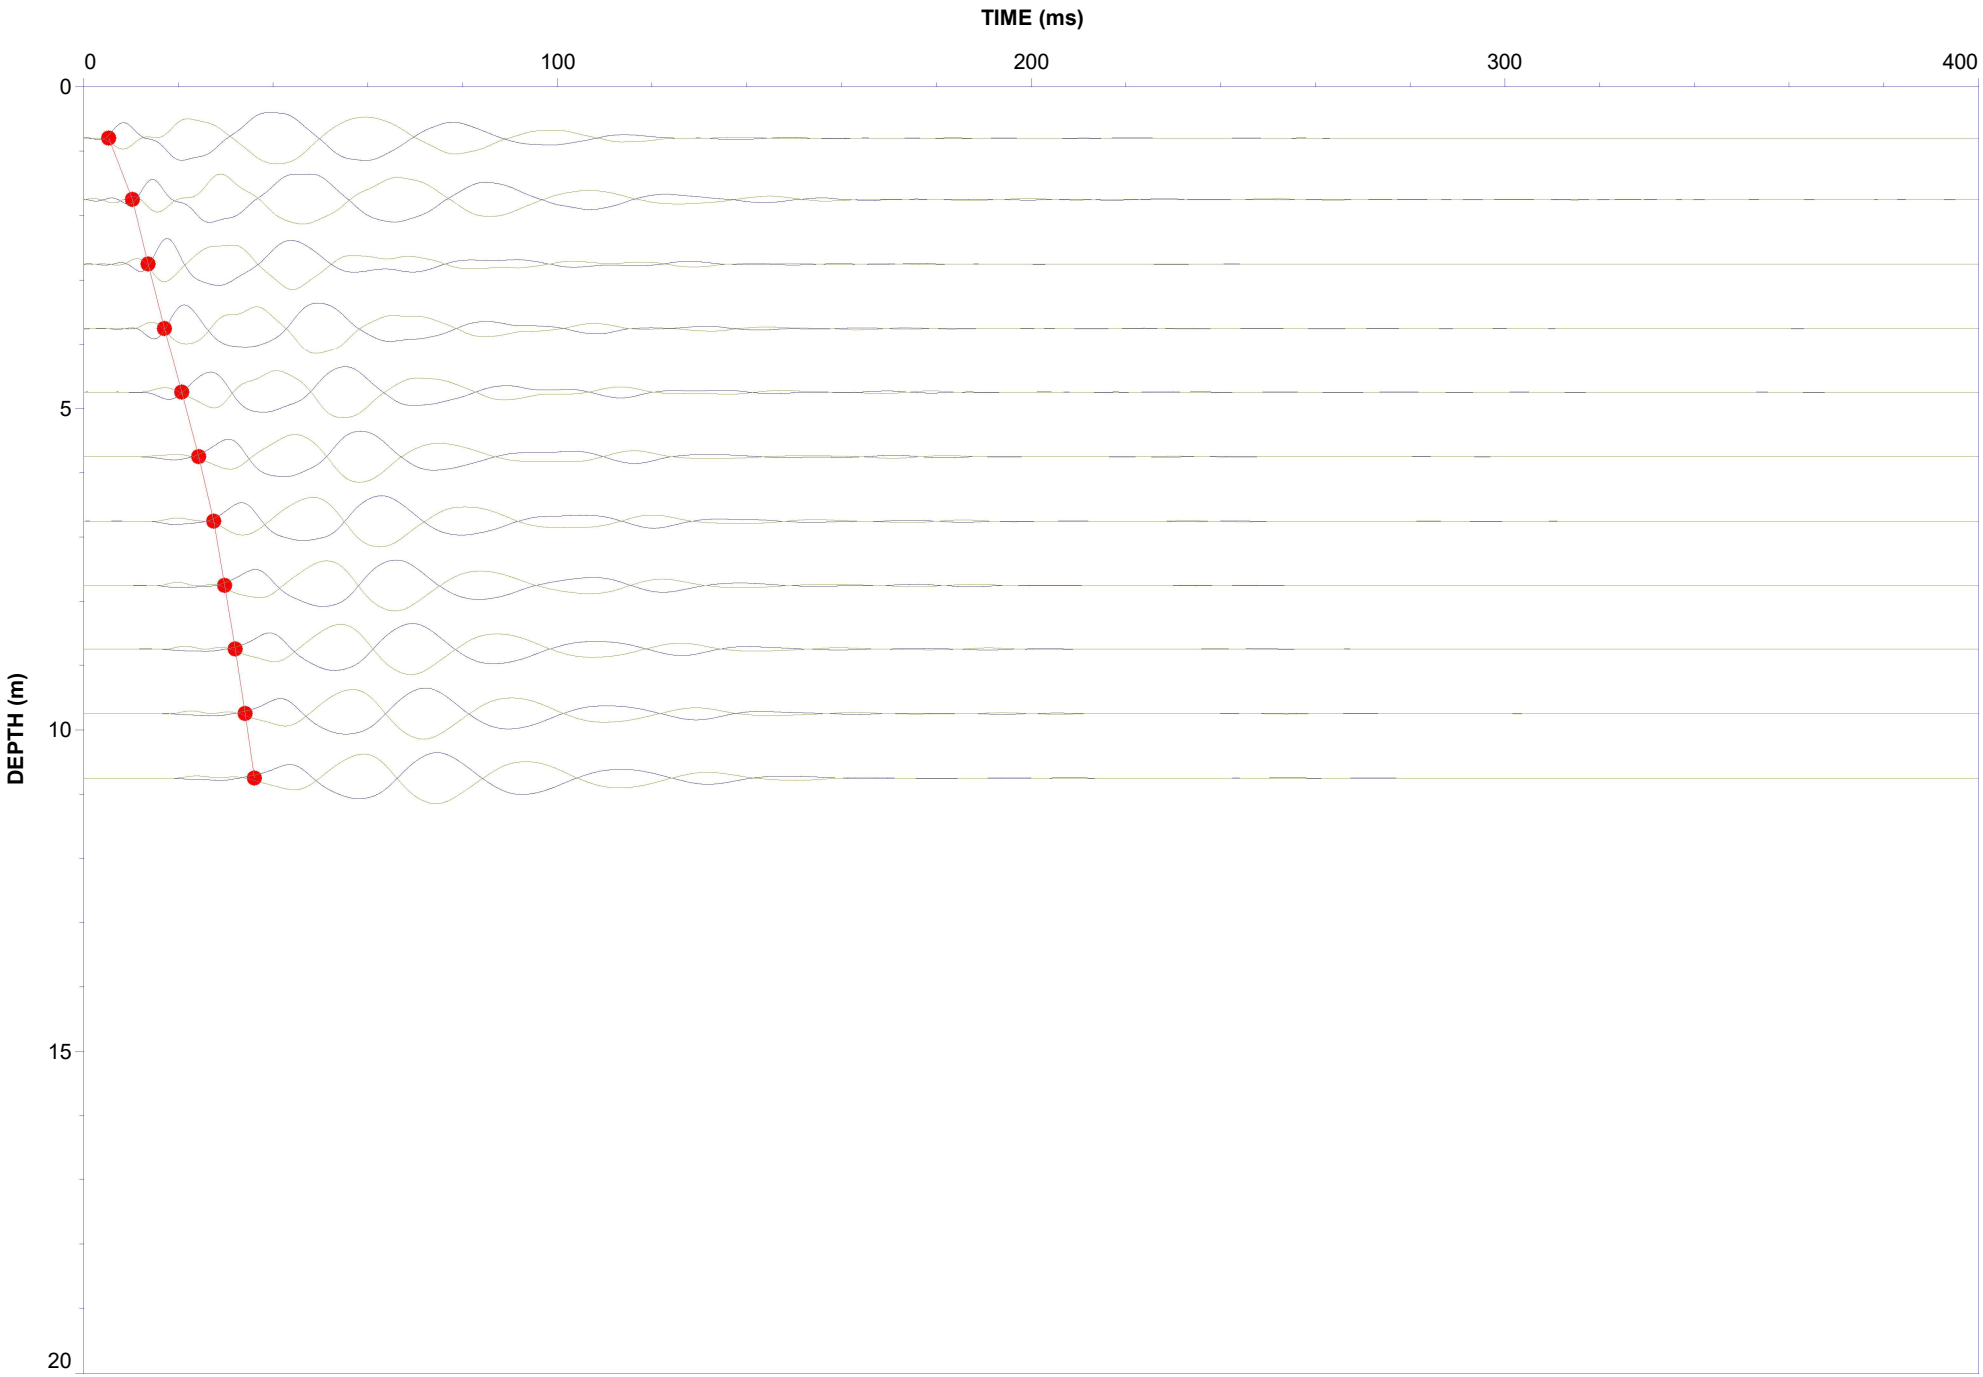


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT314 Filter: 0-150 Hz
Date: 07-Apr-2022

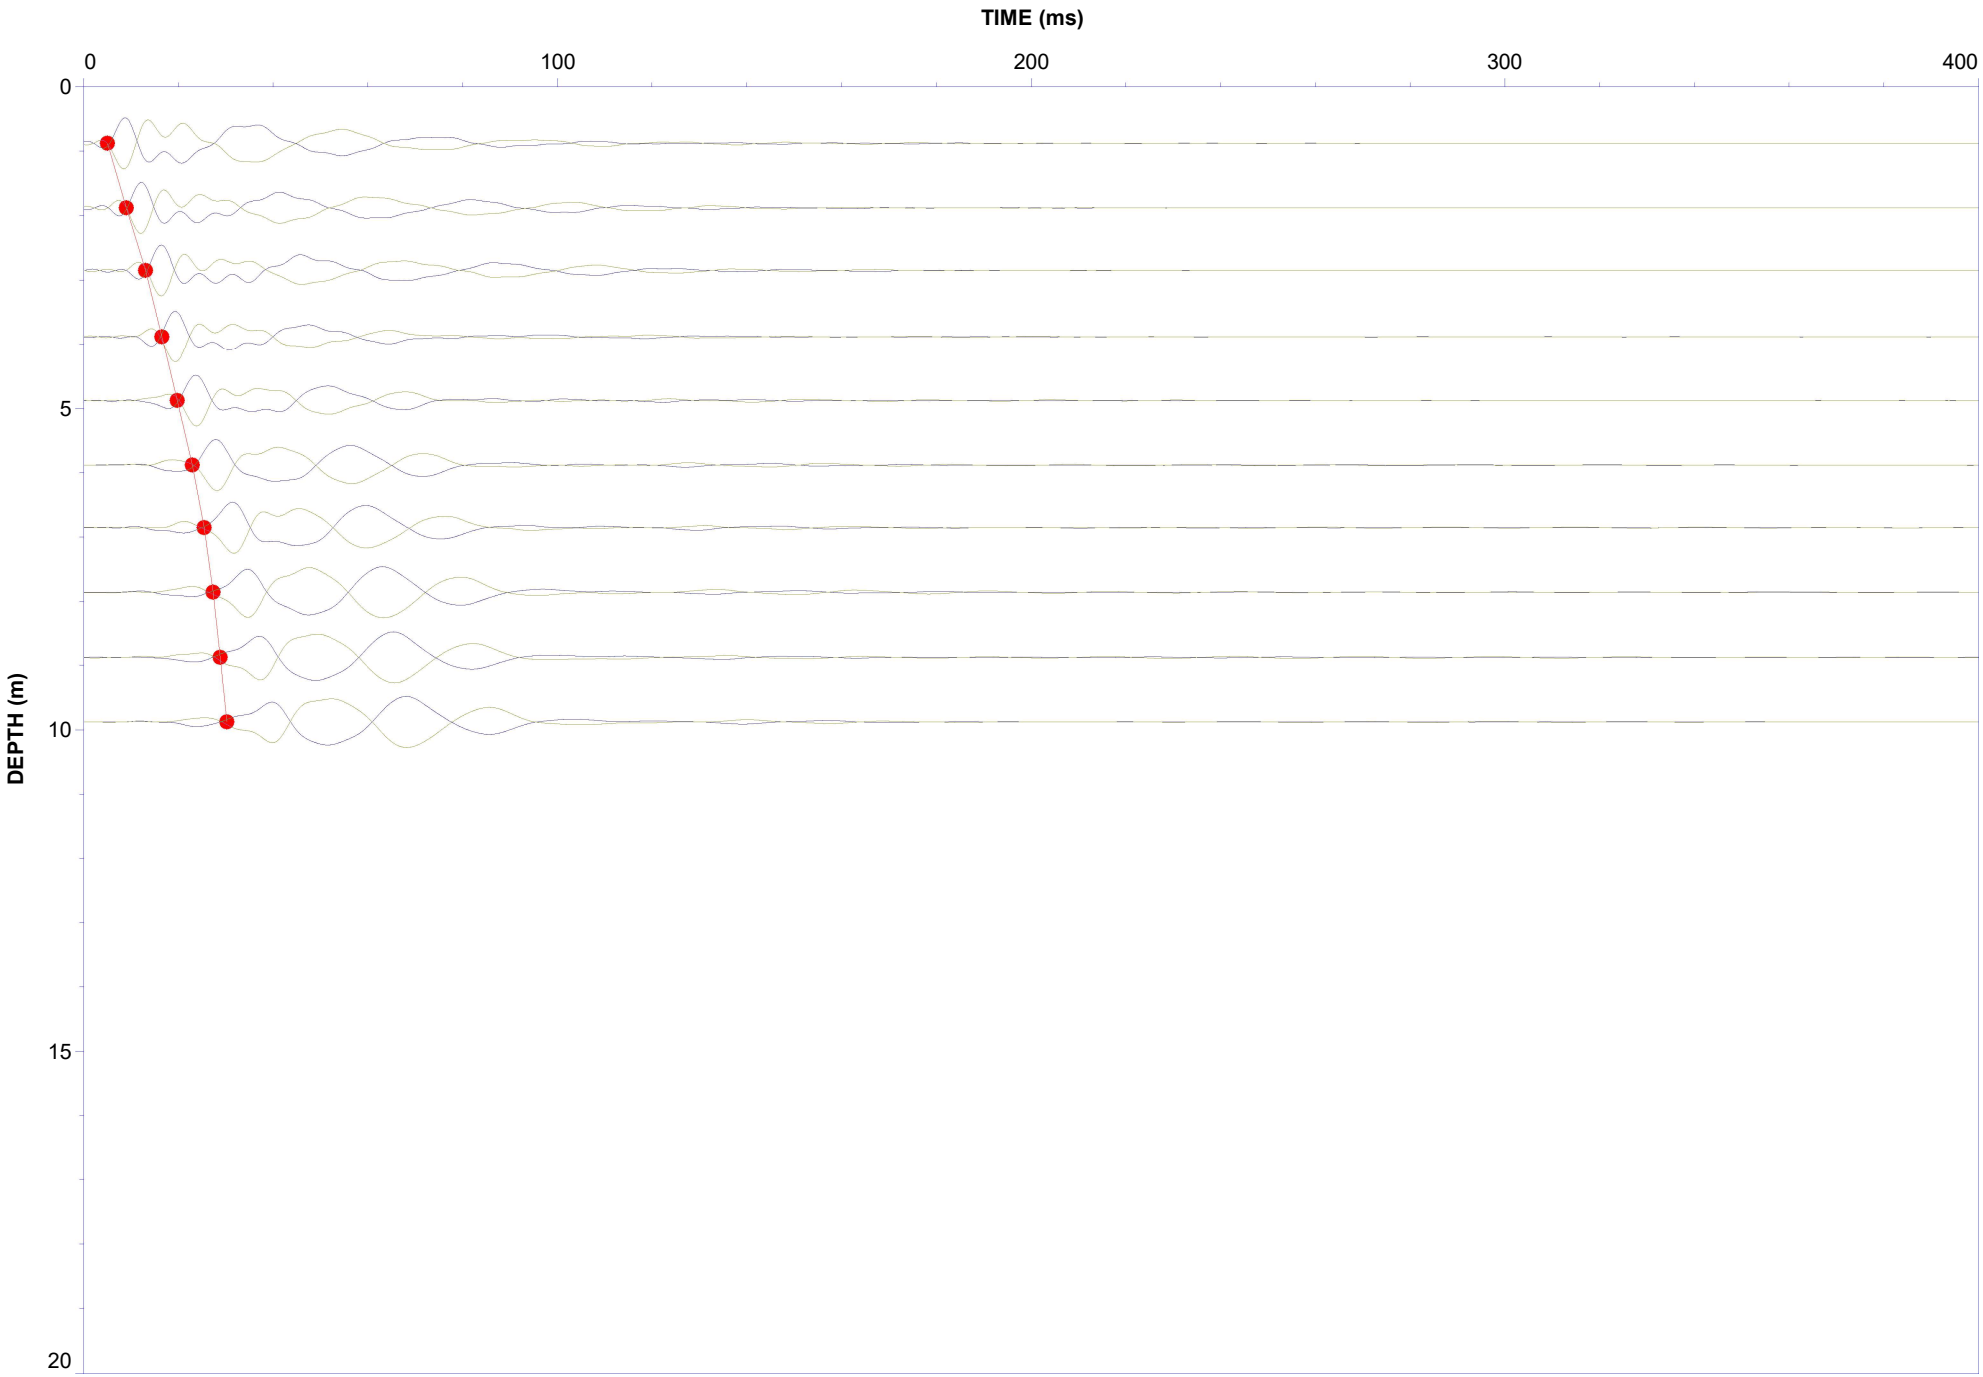


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT320 Filter: 0-75 Hz
Date: 08-Apr-2022

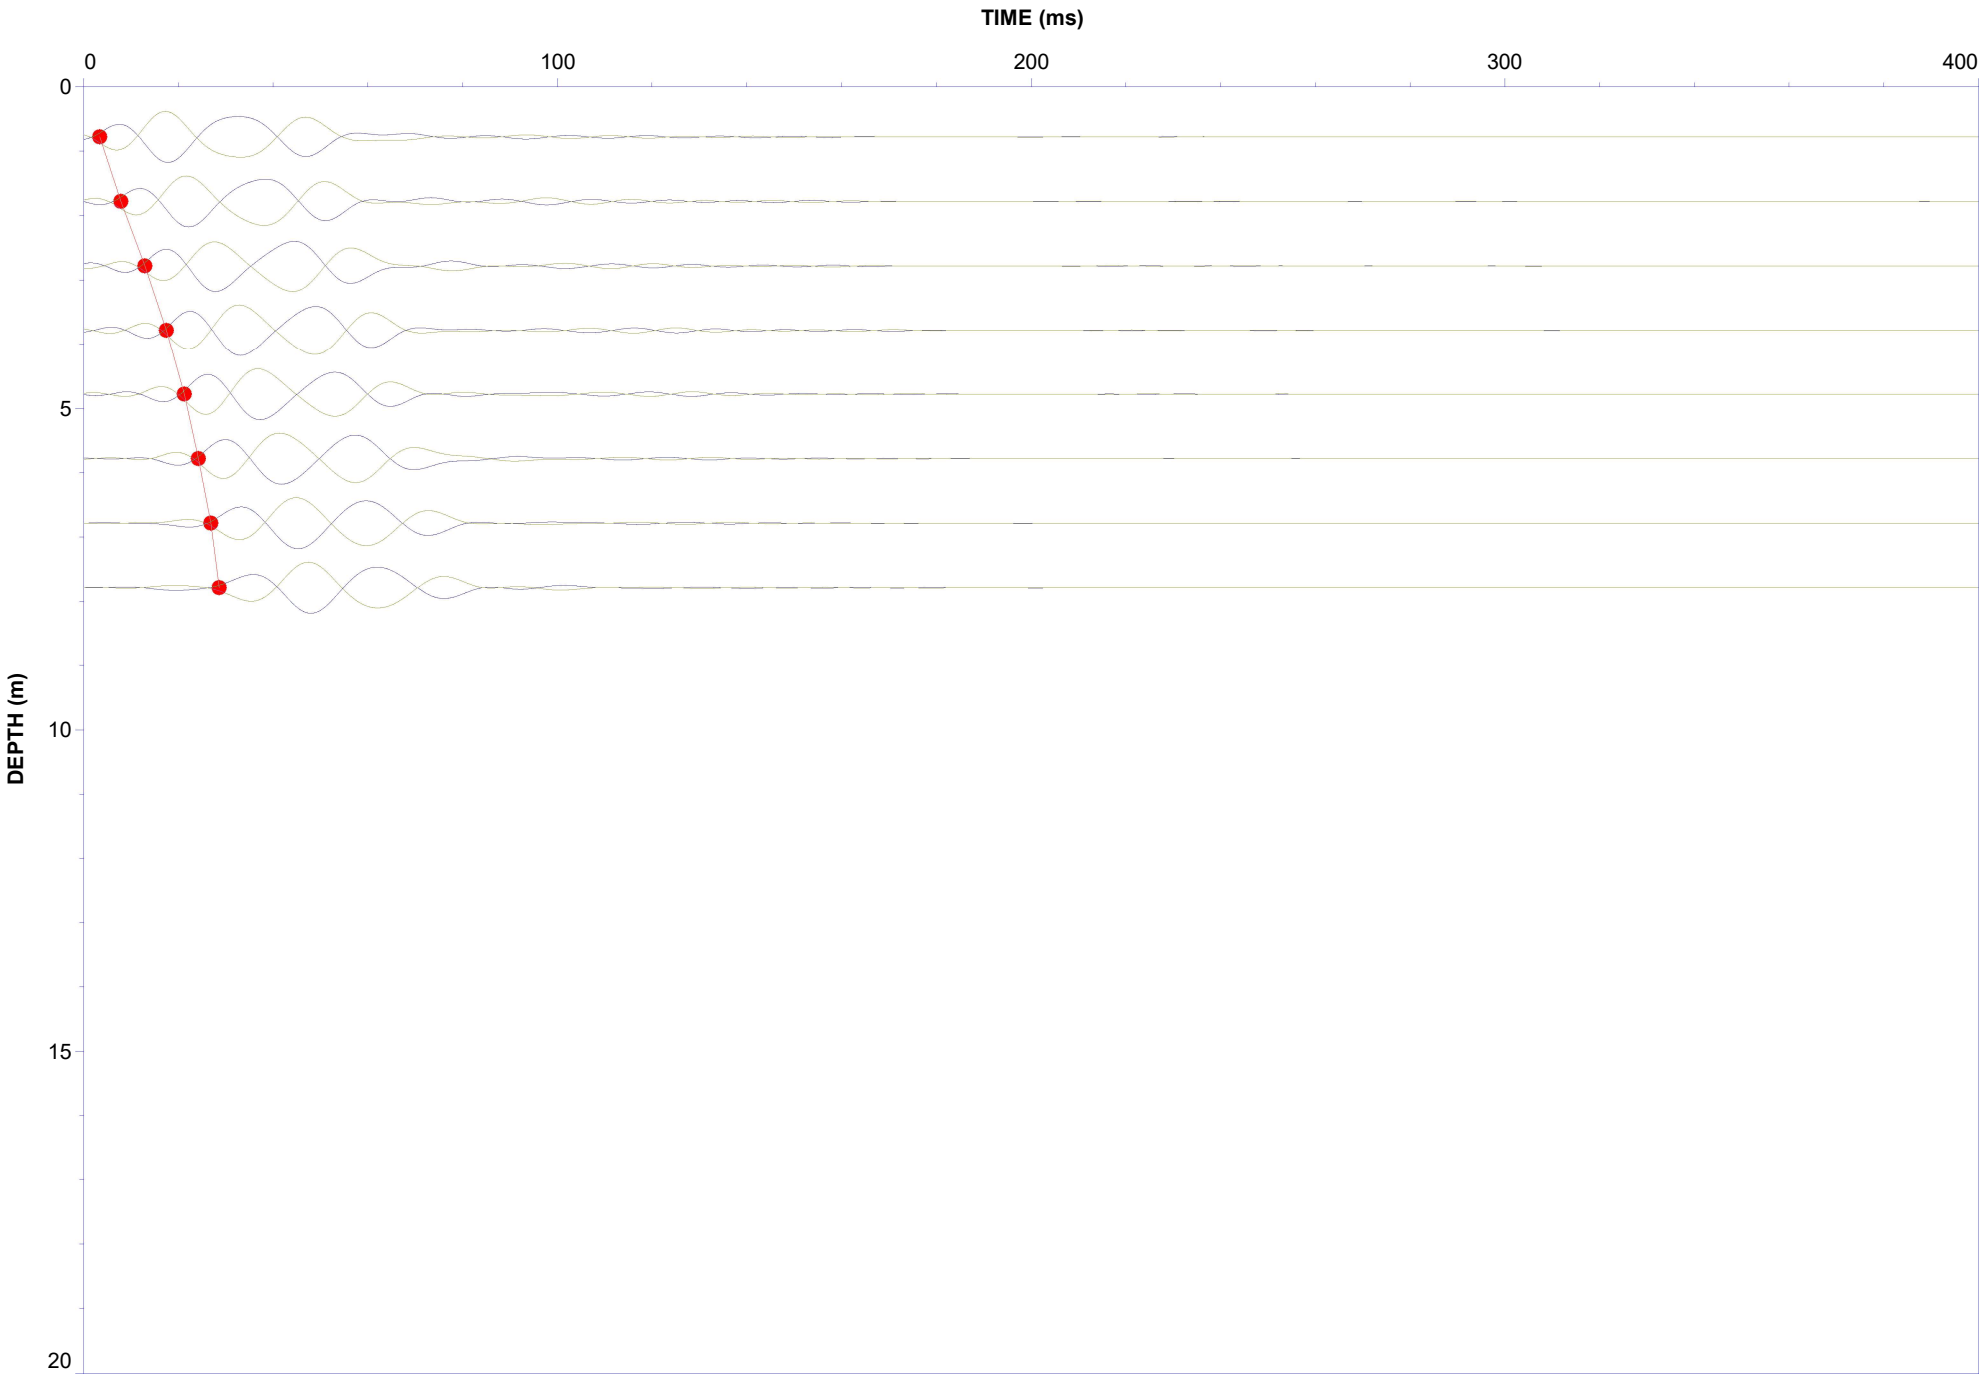


Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT328 Filter: 0-75 Hz
Date: 09-Apr-2022

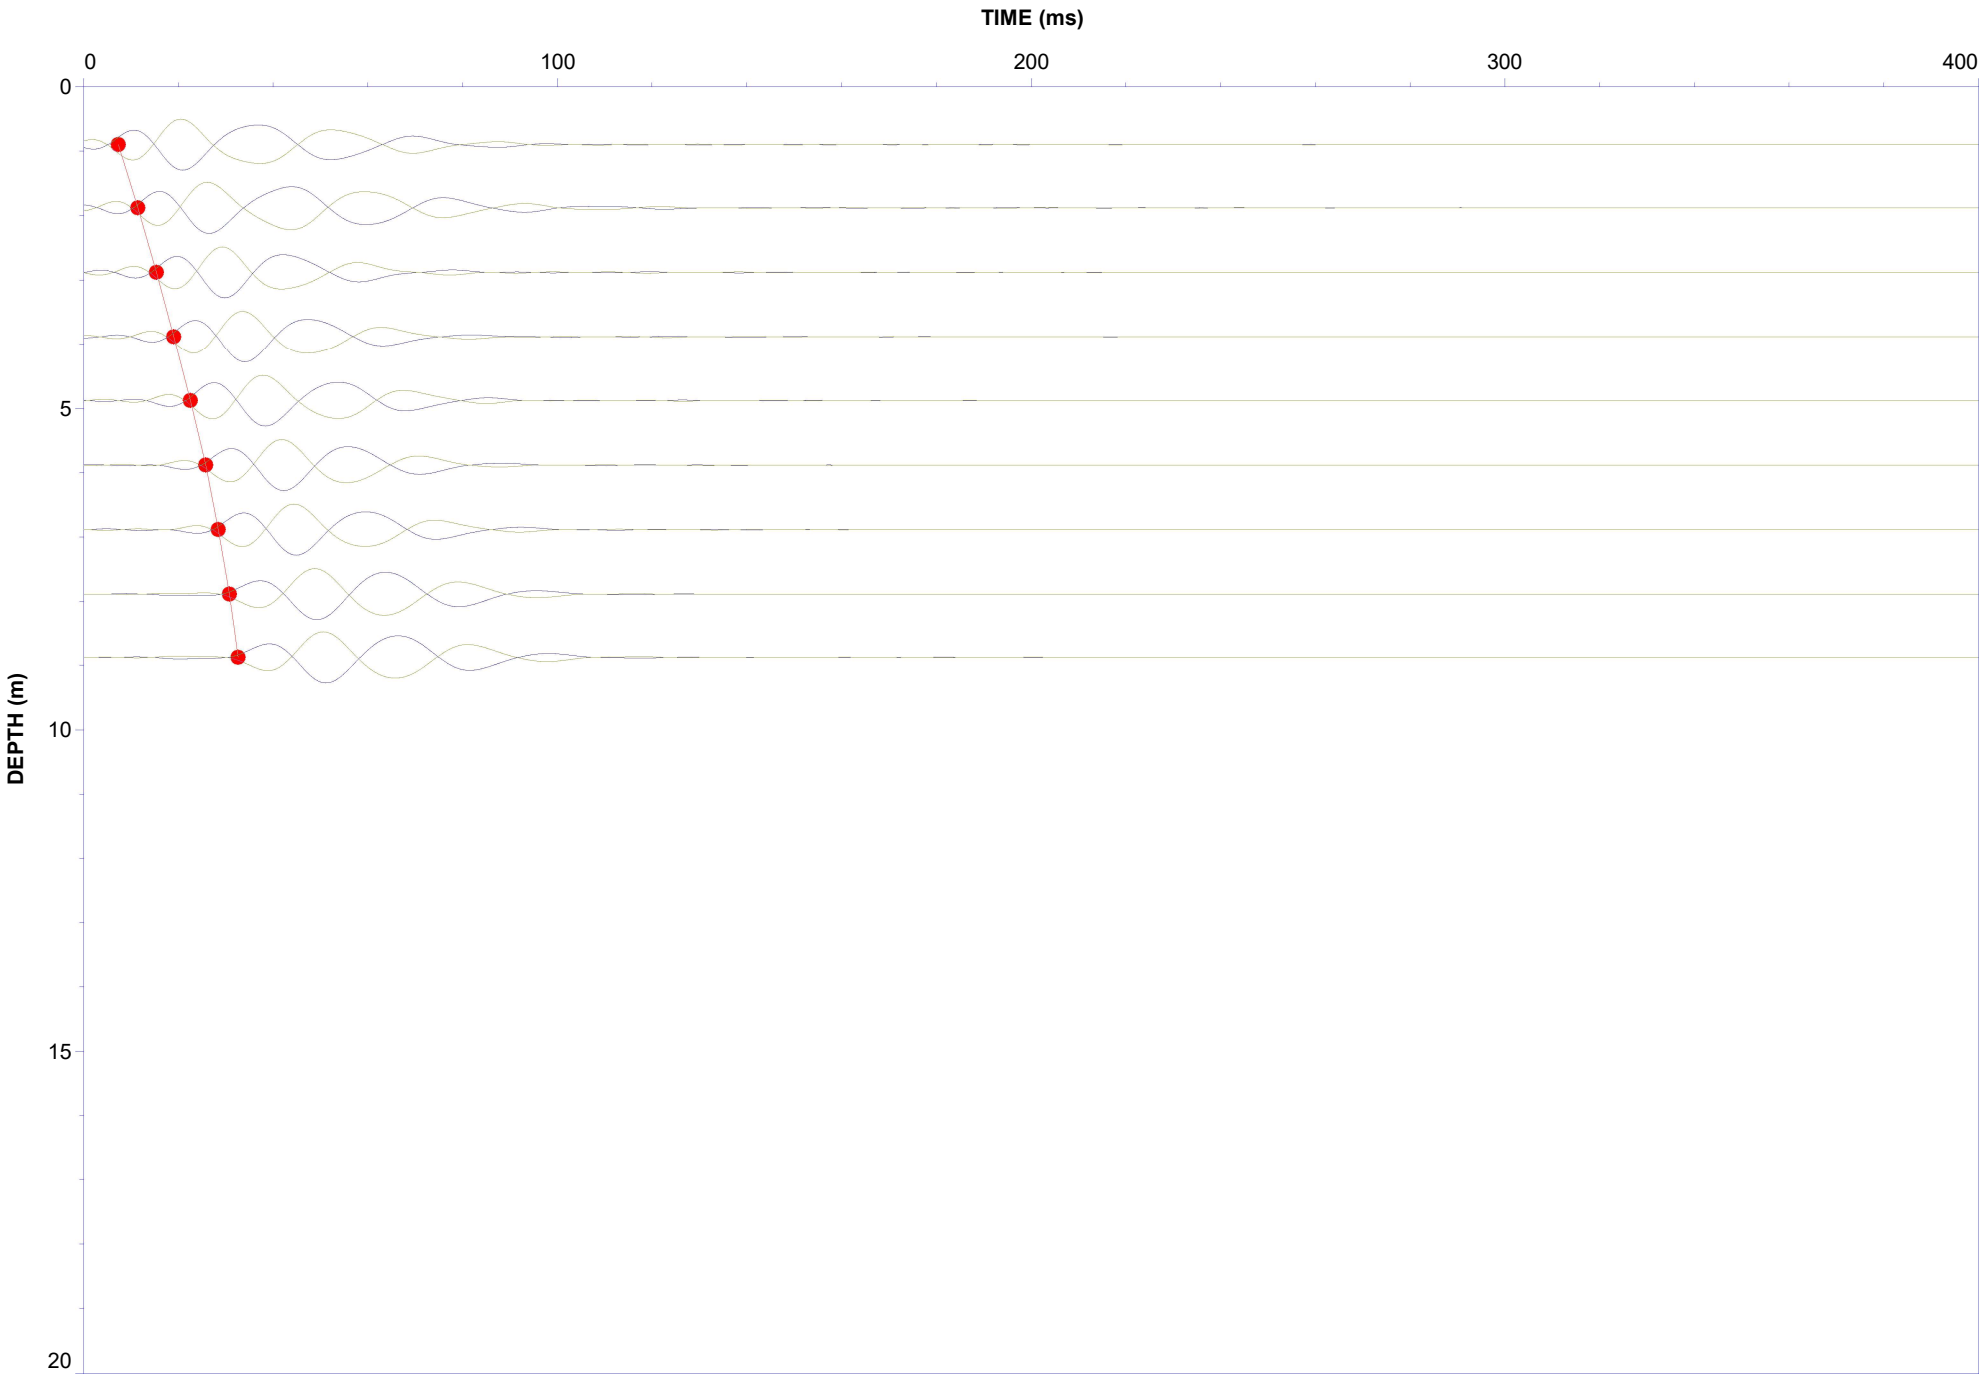

Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT334 Filter: 0-50 Hz
Date: 11-Apr-2022

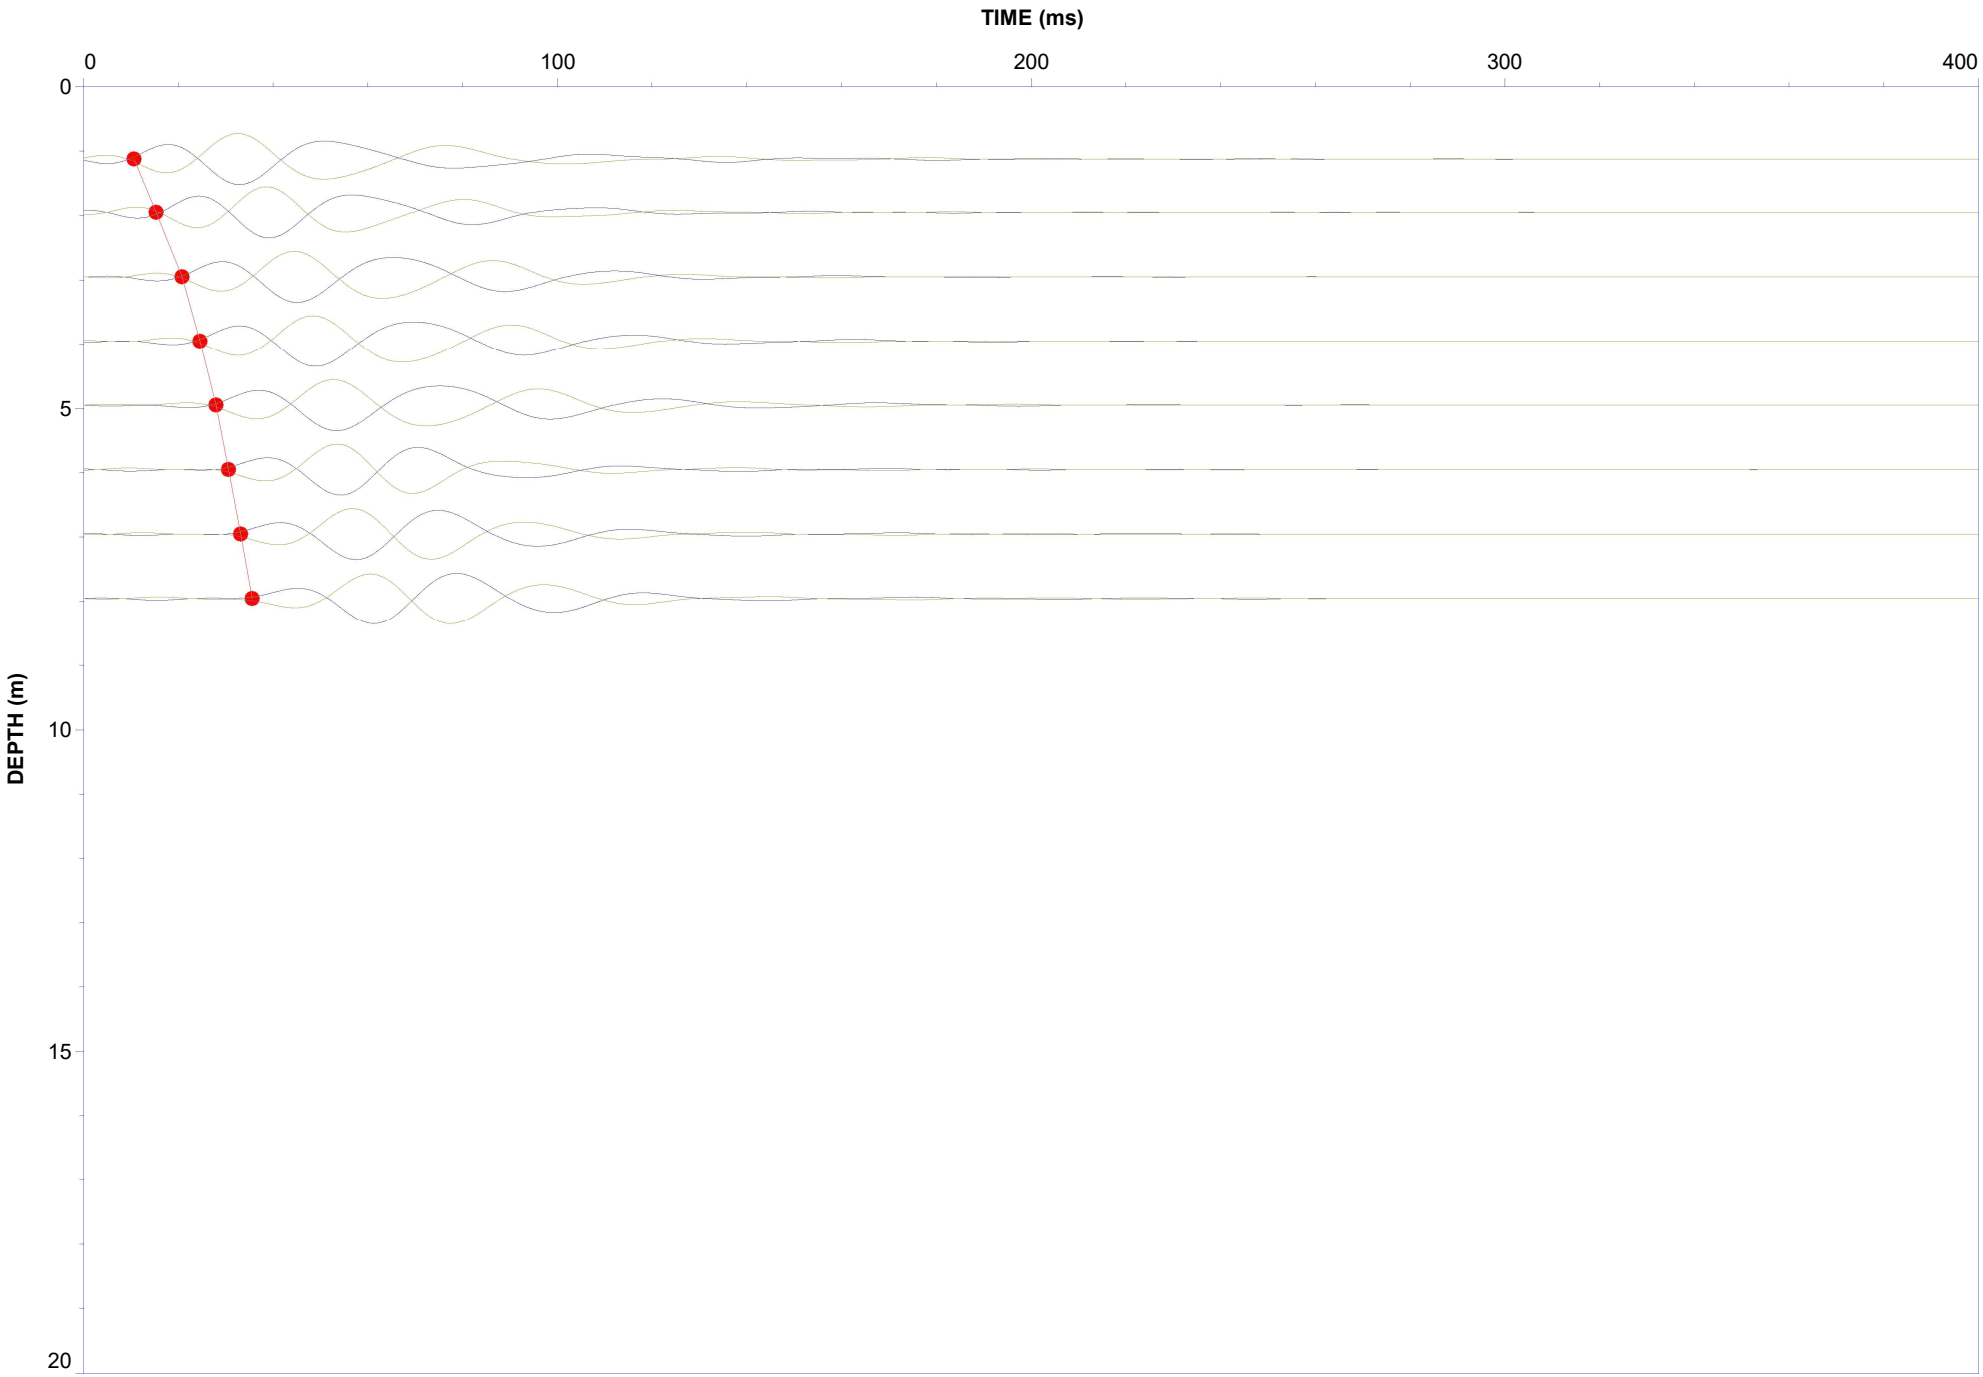

Job No: 22-02-23796 Client: MPE Engineering Project: Snake Lake Dam Alignment Sounding: RSCPT22-22CPT339 Filter: 0-75 Hz
Date: 12-Apr-2022

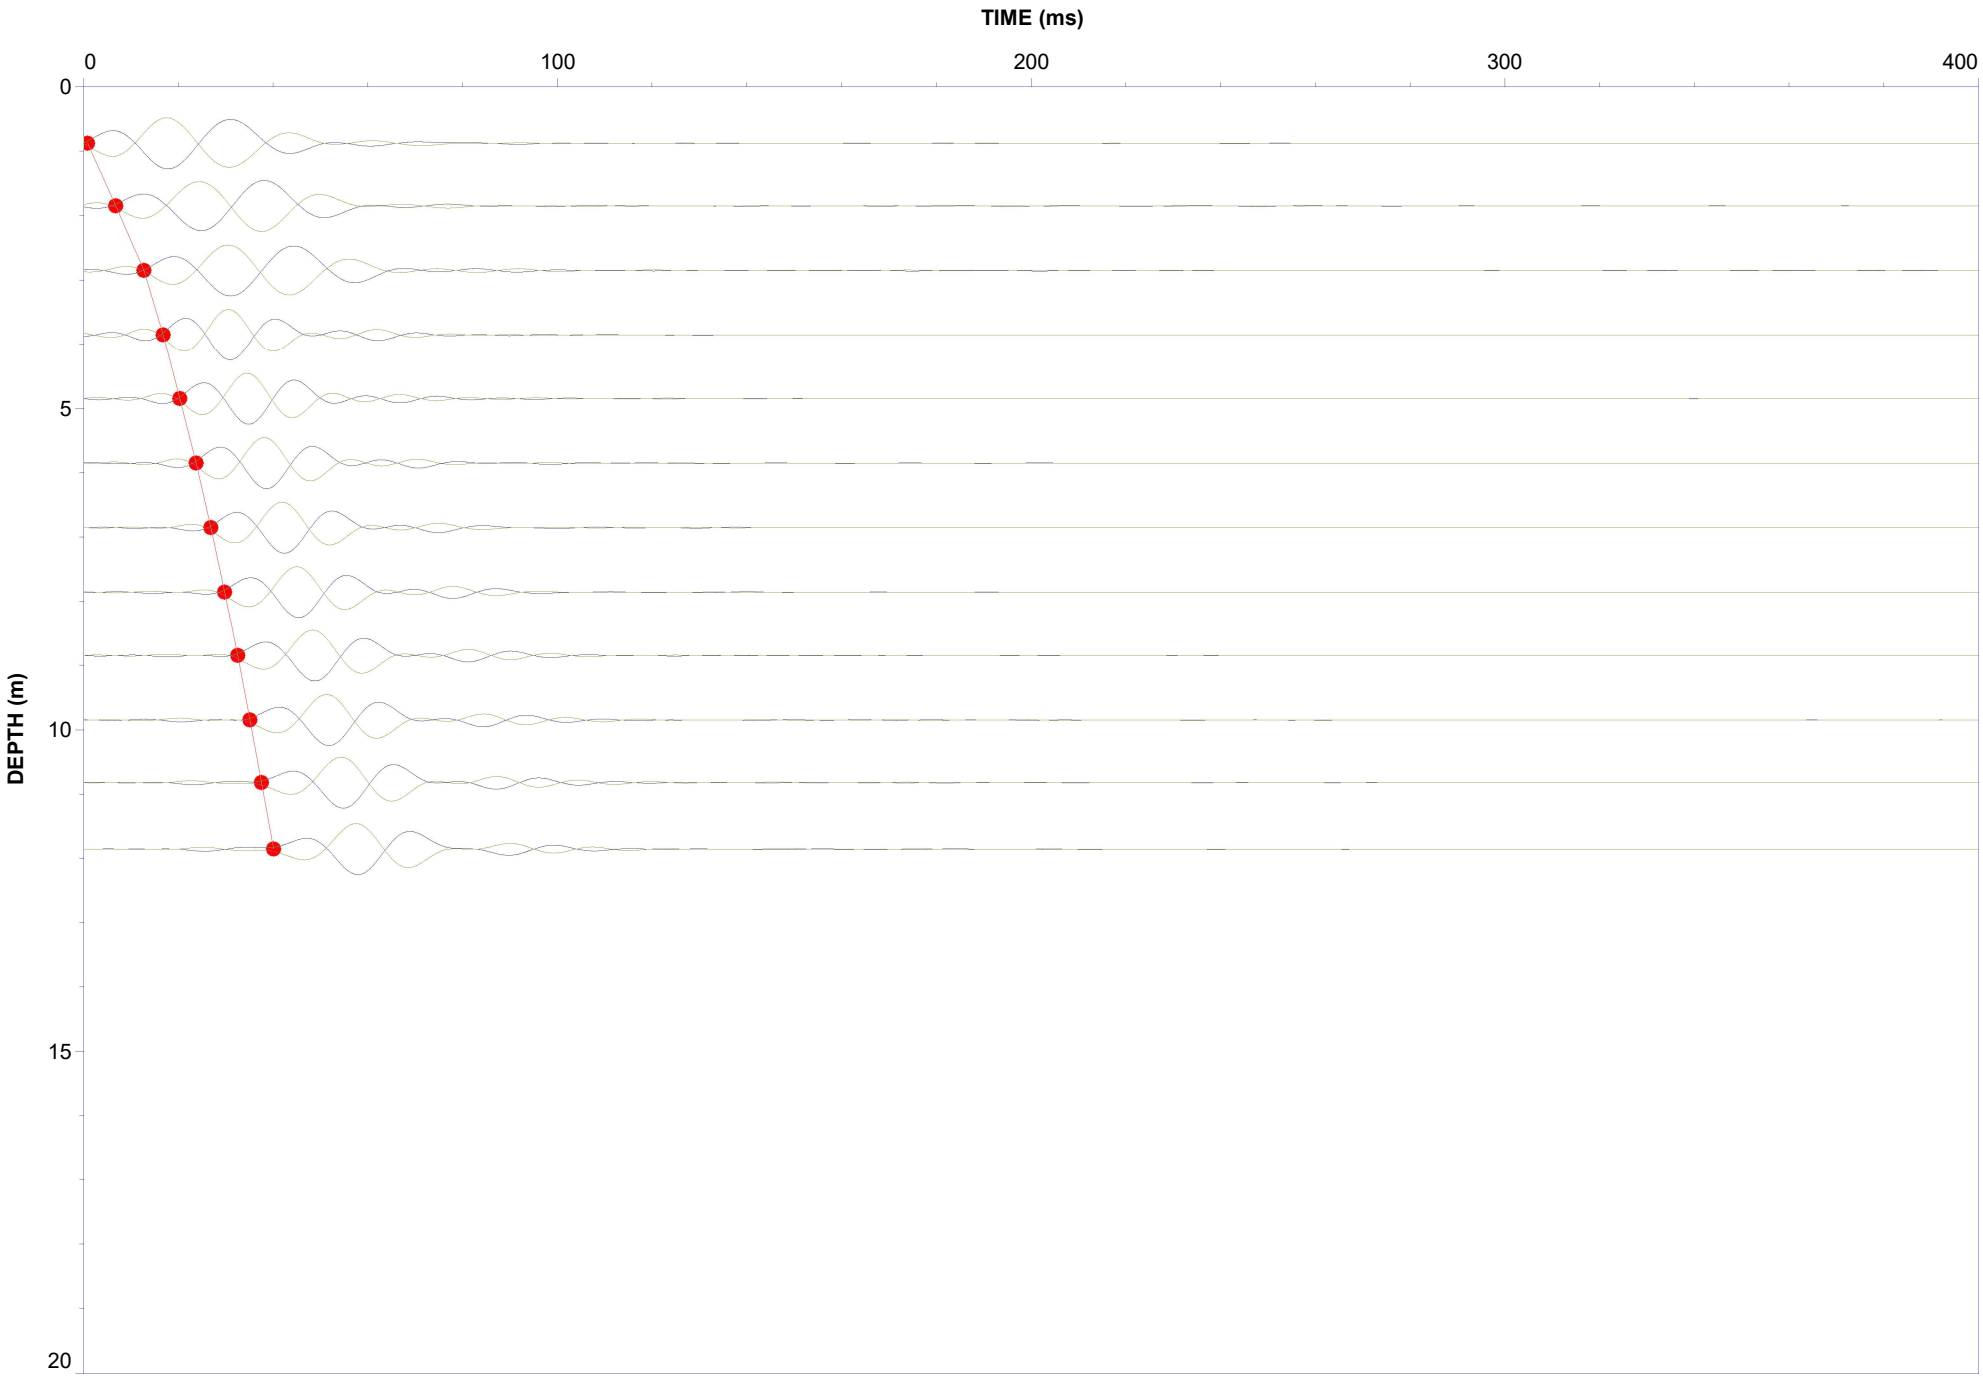

Soil Behaviour Type (SBT) Scatter Plots

CONETEC


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-19 09:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT100
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

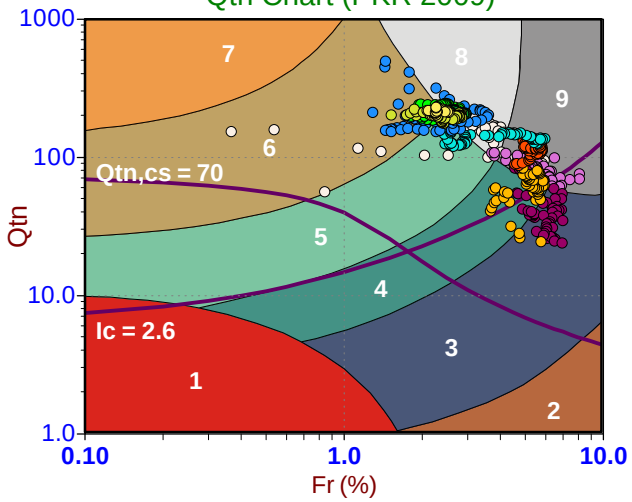

Modified SBTn (PKR 2016)

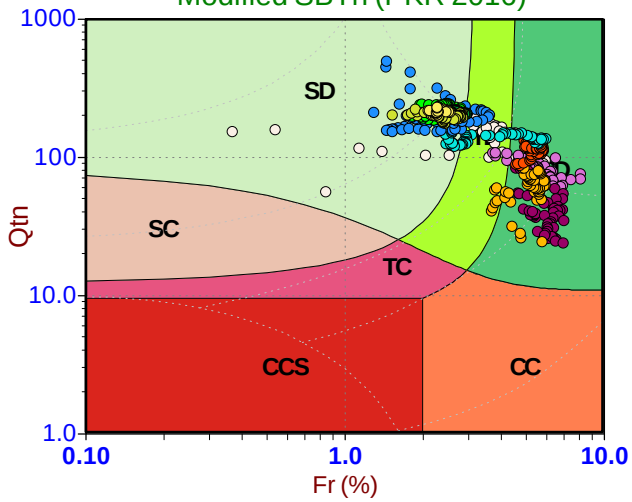

Standard SBT Chart (UBC 1986)

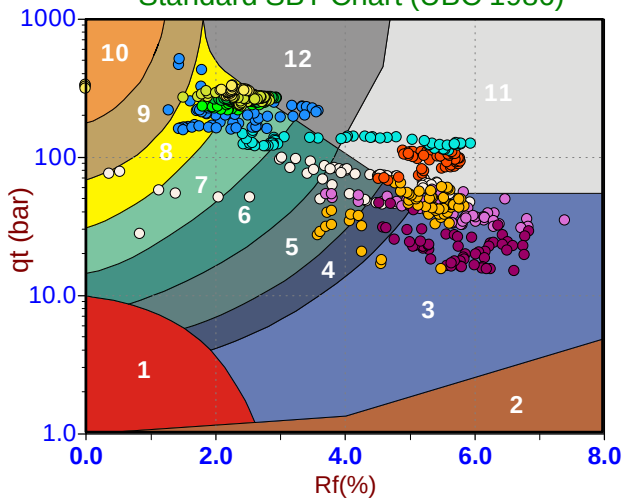

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-19 11:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT101
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

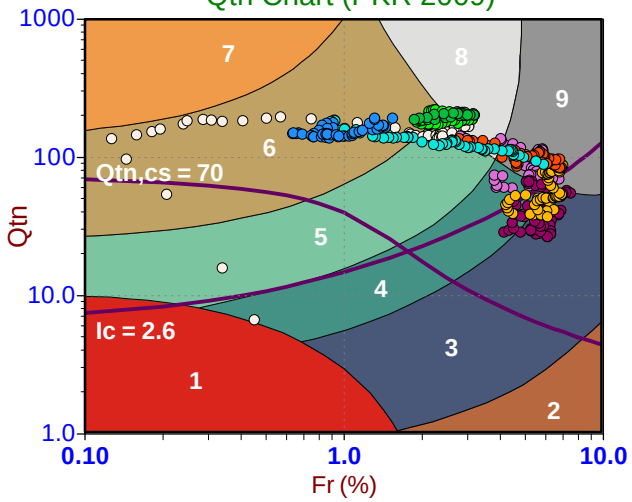

Modified SBTn (PKR 2016)

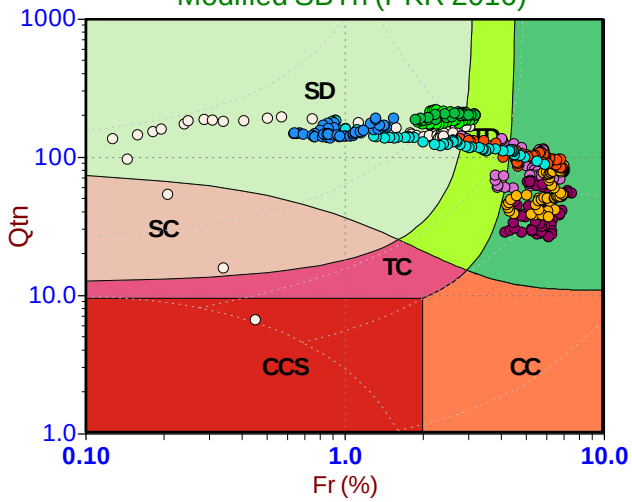

Standard SBT Chart (UBC 1986)

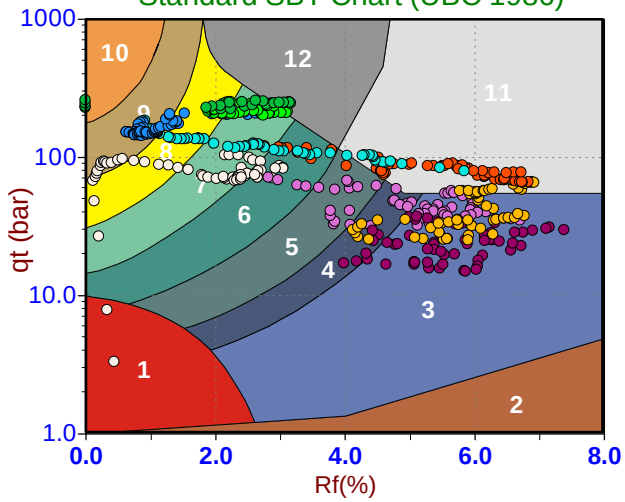

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-19 13:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT102
Cone: 651:T1500F15U35


Qtn Chart (PKR 2009)

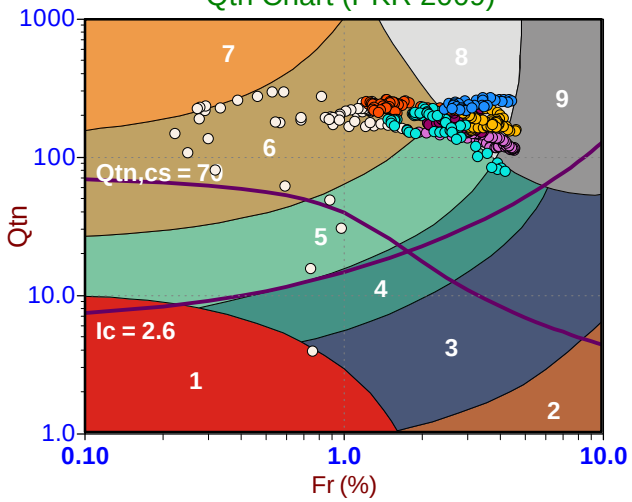

Modified SBTn (PKR 2016)

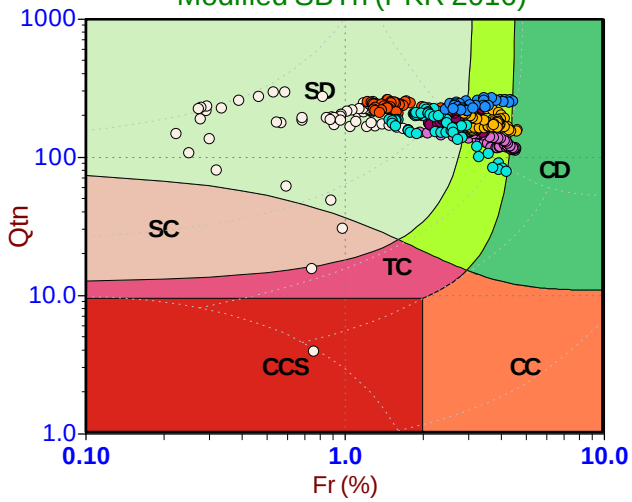

Standard SBT Chart (UBC 1986)

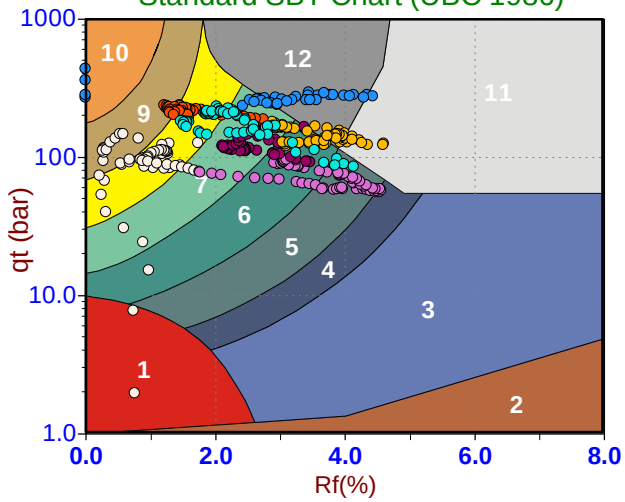

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-19 15:27
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT103
Cone: 651:T1500F15U35


Qtn Chart (PKR 2009)

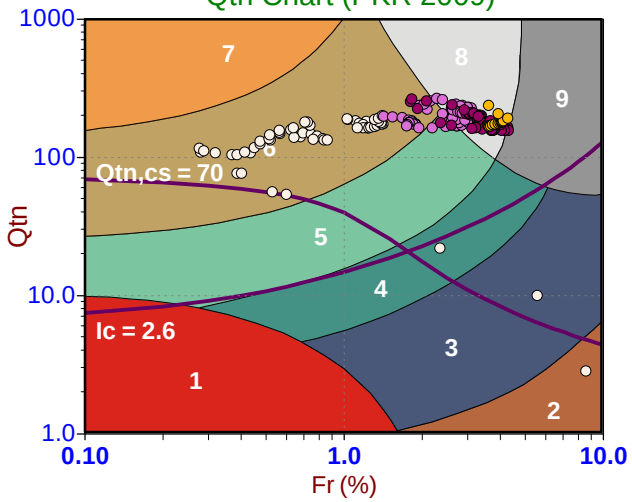

Modified SBTn (PKR 2016)

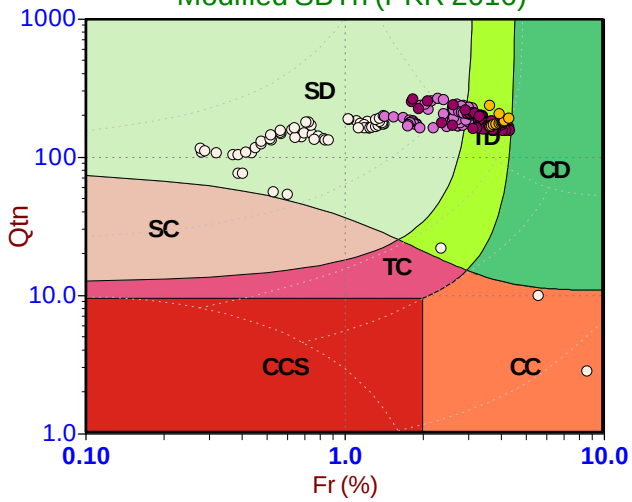

Standard SBT Chart (UBC 1986)

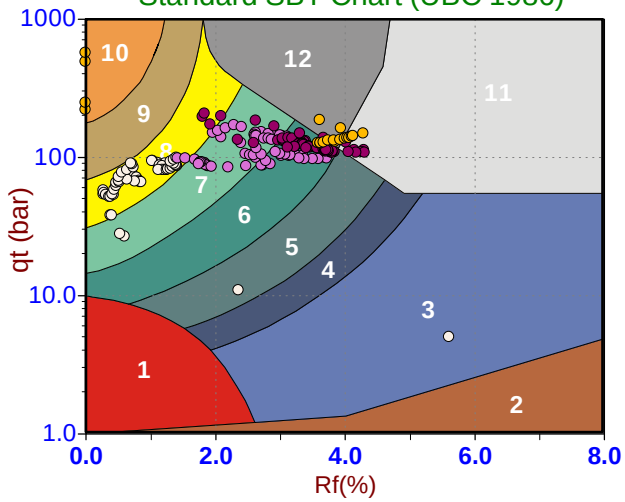

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-19 16:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT104
Cone: 651:T1500F15U35


Qtn Chart (PKR 2009)

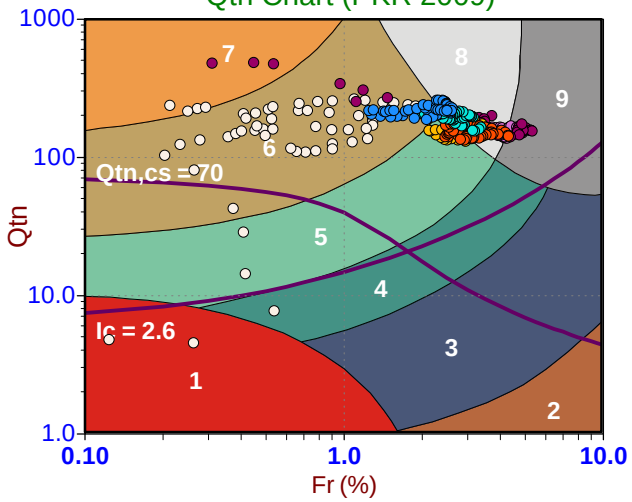

Modified SBTn (PKR 2016)

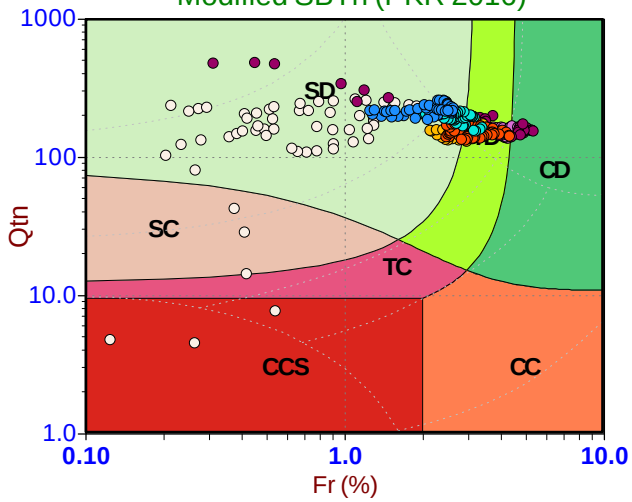

Standard SBT Chart (UBC 1986)

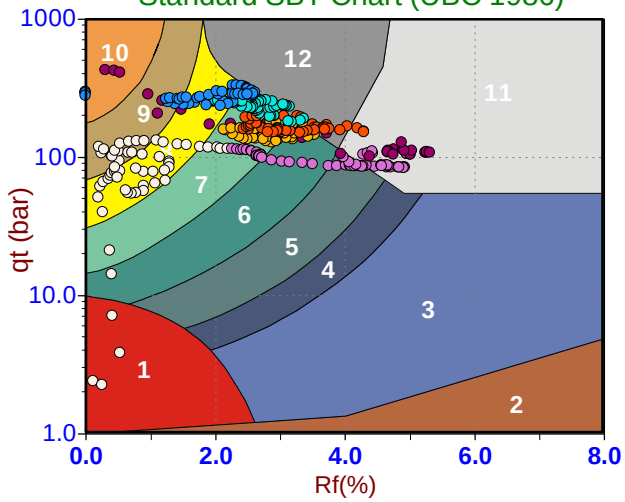

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-20 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT105
Cone: 651:T1500F15U35


Qtn Chart (PKR 2009)

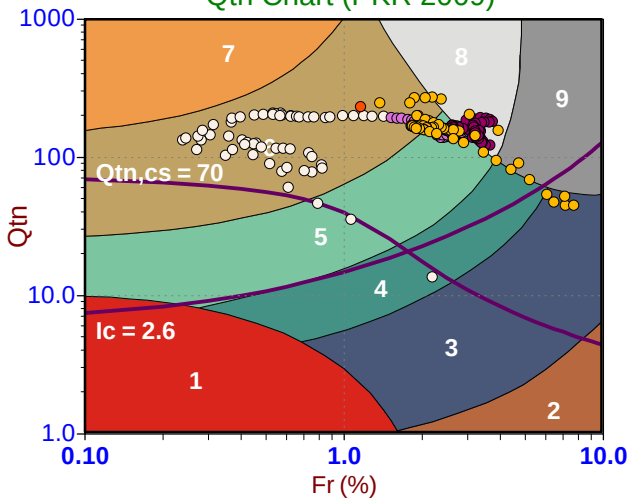

Modified SBTn (PKR 2016)

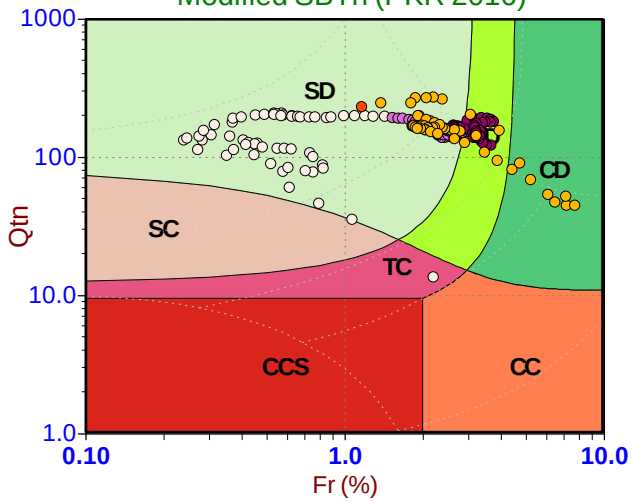

Standard SBT Chart (UBC 1986)

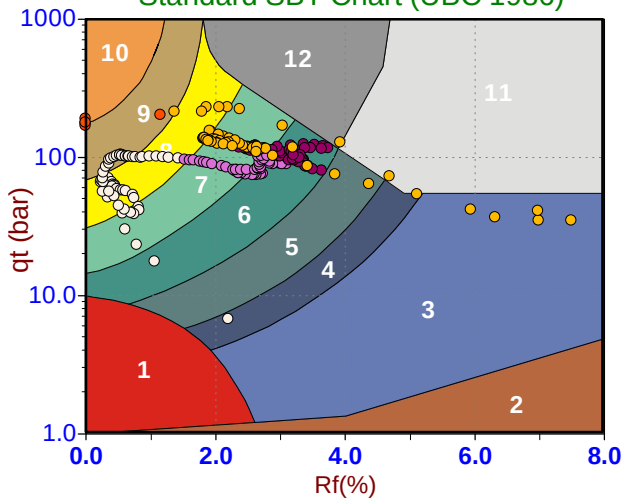

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-20 11:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT106
Cone: 651:T1500F15U35


Qtn Chart (PKR 2009)

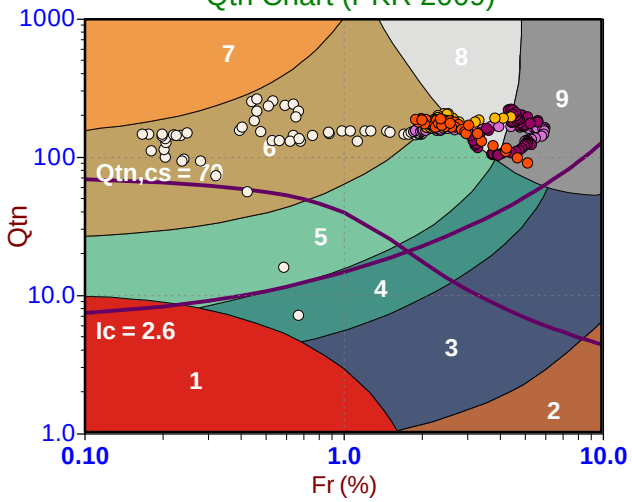

Modified SBTn (PKR 2016)

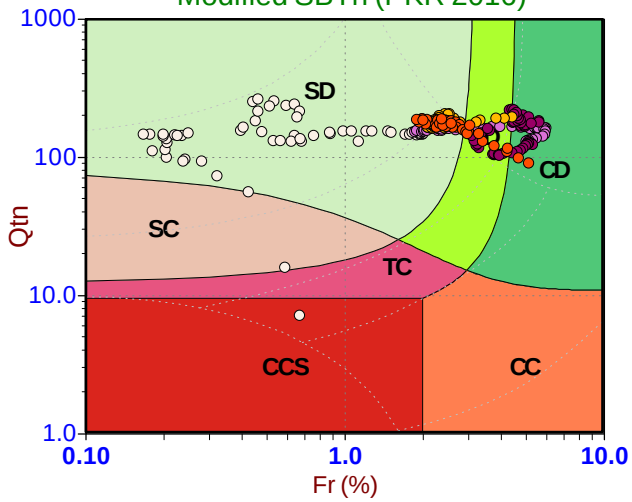

Standard SBT Chart (UBC 1986)

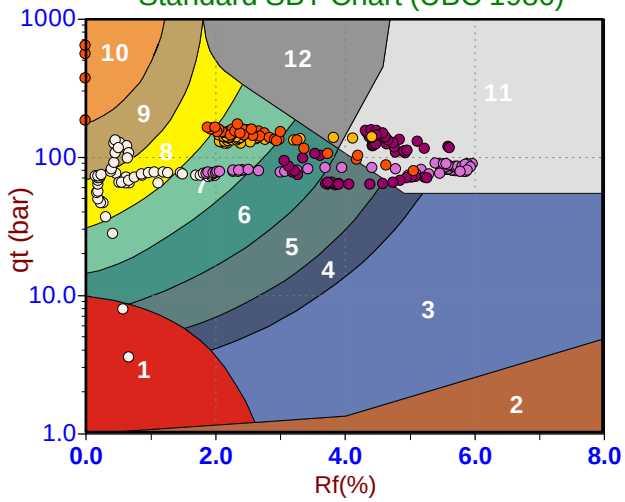

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-20 12:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT107
Cone: 651:T1500F15U35


Qtn Chart (PKR 2009)

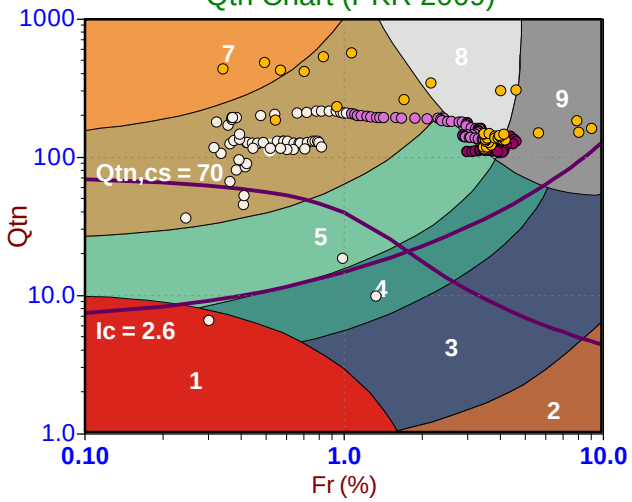

Modified SBTn (PKR 2016)

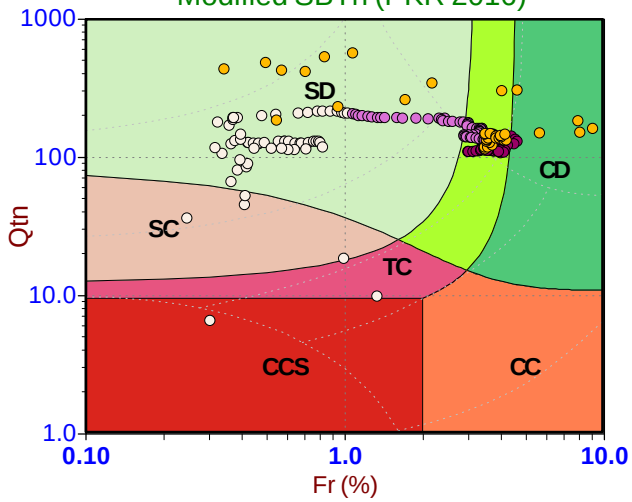

Standard SBT Chart (UBC 1986)

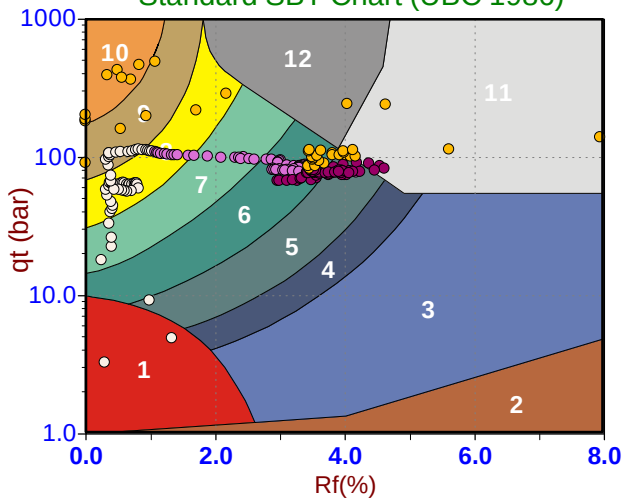

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-20 14:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT107A
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

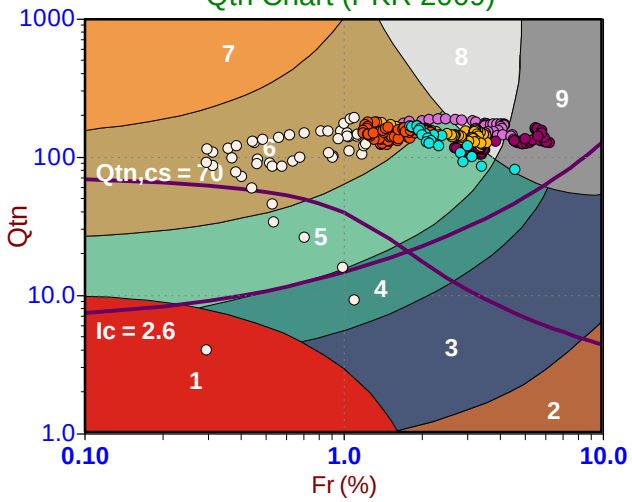

Modified SBTn (PKR 2016)

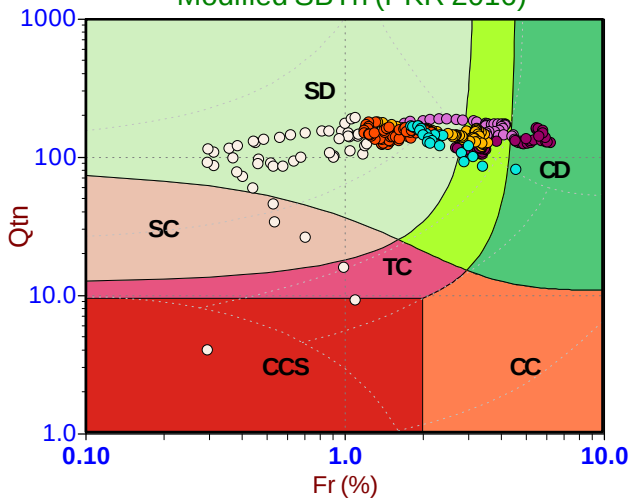

Standard SBT Chart (UBC 1986)

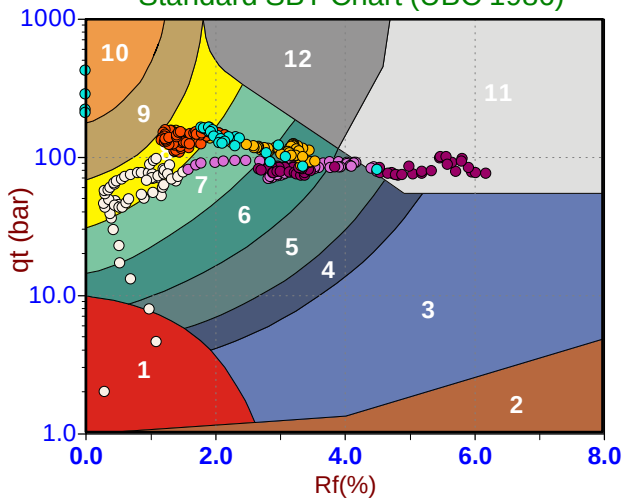

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-20 16:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT108
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

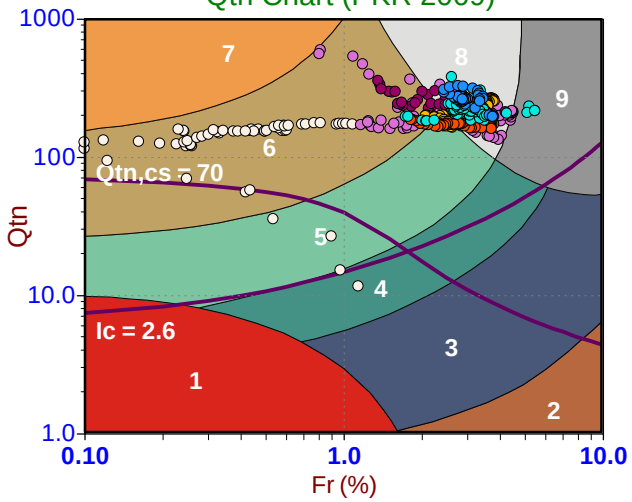

Modified SBTn (PKR 2016)

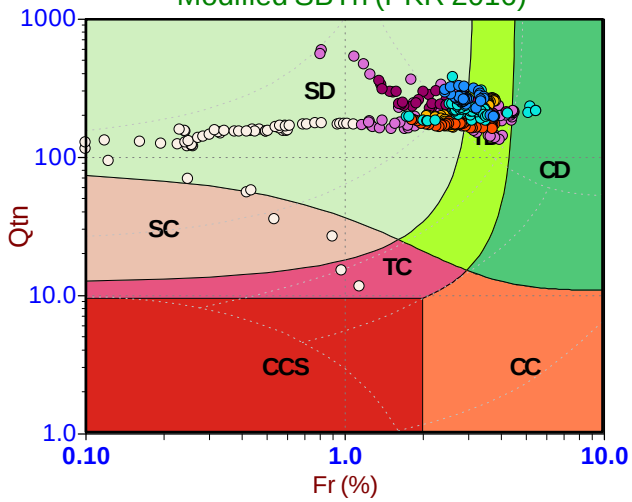

Standard SBT Chart (UBC 1986)

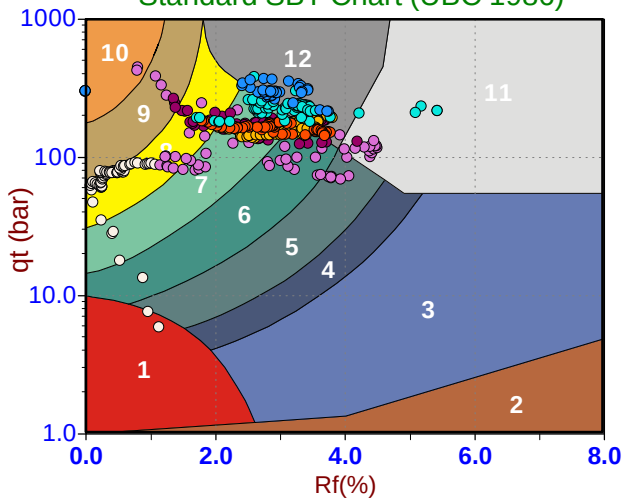

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-22 08:46
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT109
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

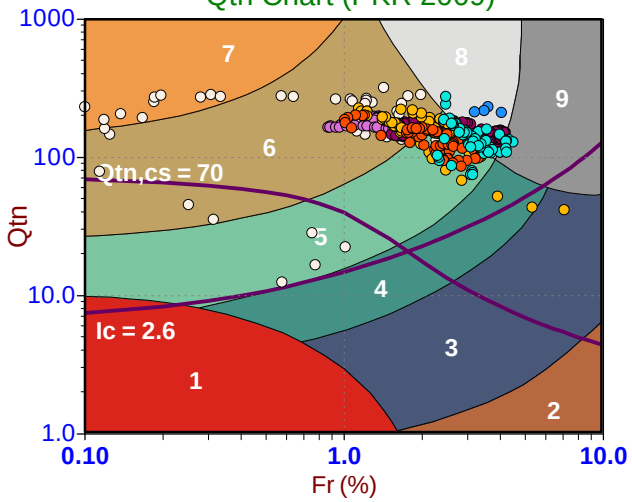

Modified SBTn (PKR 2016)

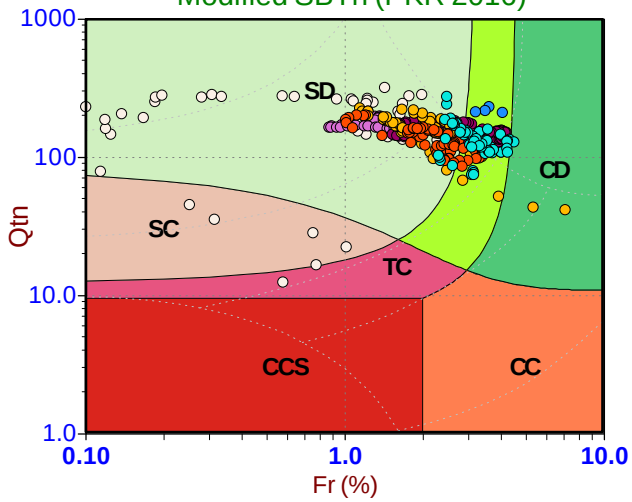

Standard SBT Chart (UBC 1986)

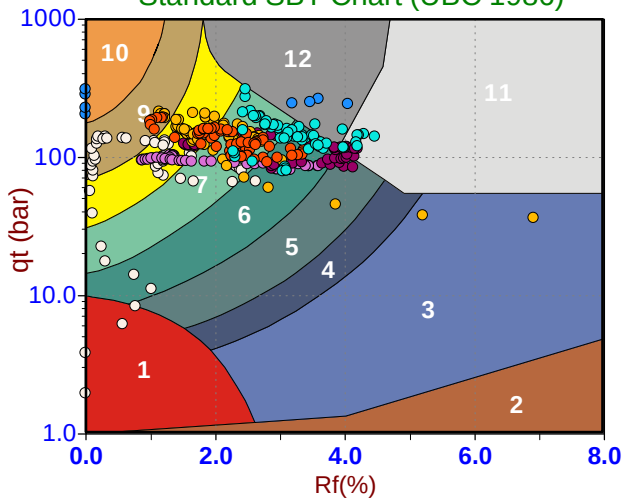

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-21 16:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

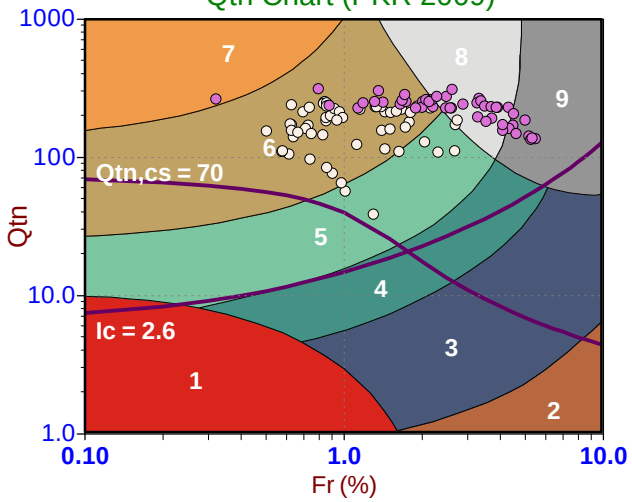

Modified SBTn (PKR 2016)

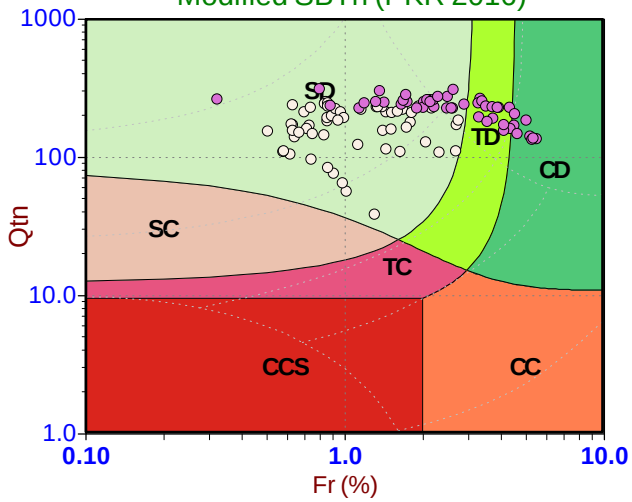

Standard SBT Chart (UBC 1986)

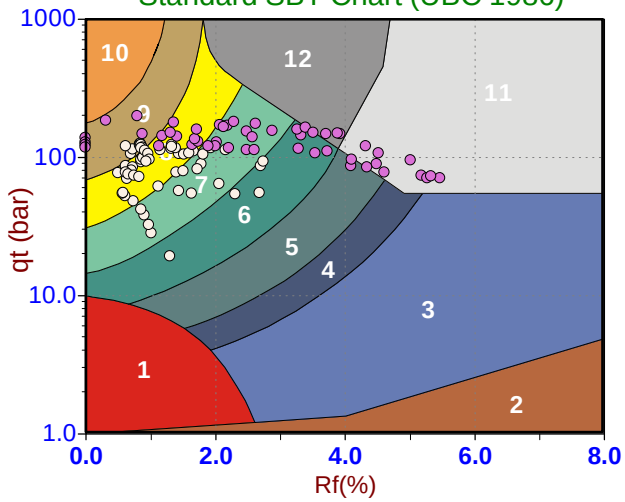

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-21 16:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110A
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

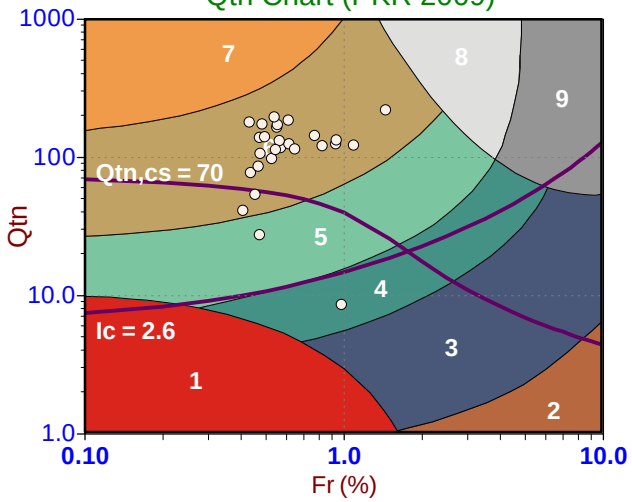

Modified SBTn (PKR 2016)

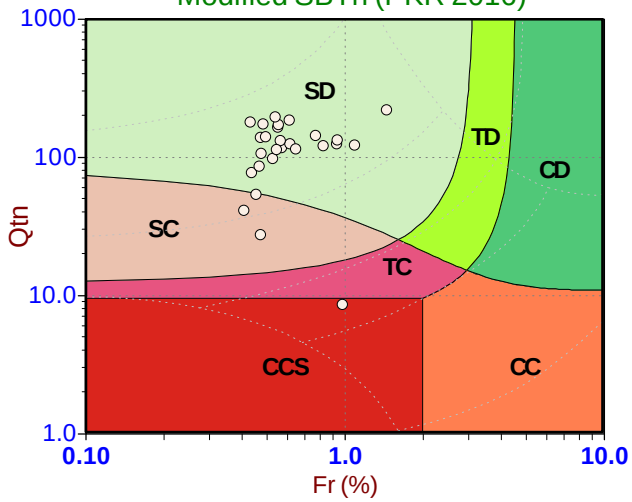

Standard SBT Chart (UBC 1986)

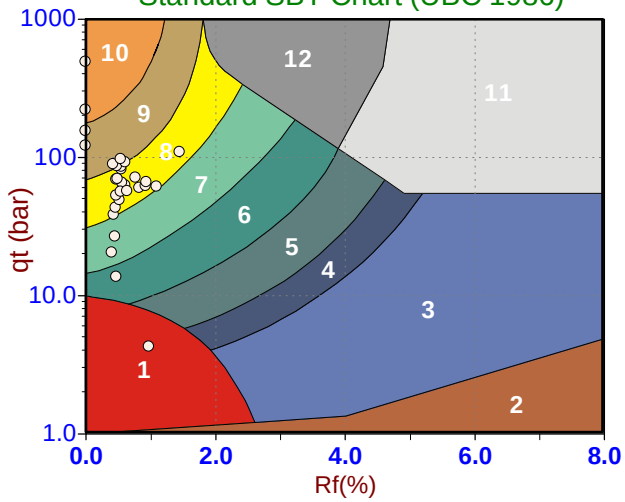

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-21 17:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110B
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

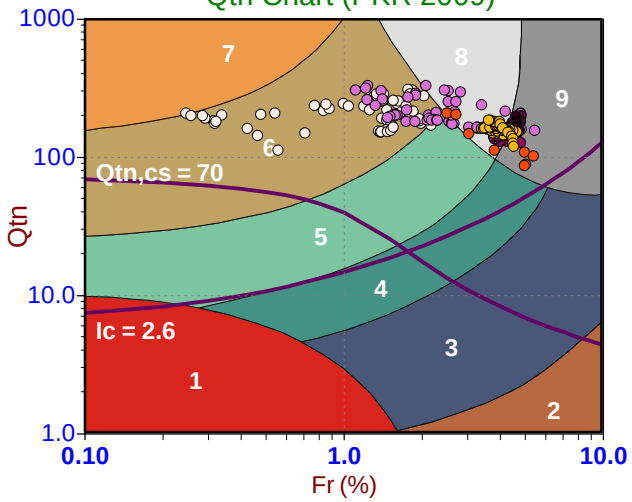

Modified SBTn (PKR 2016)

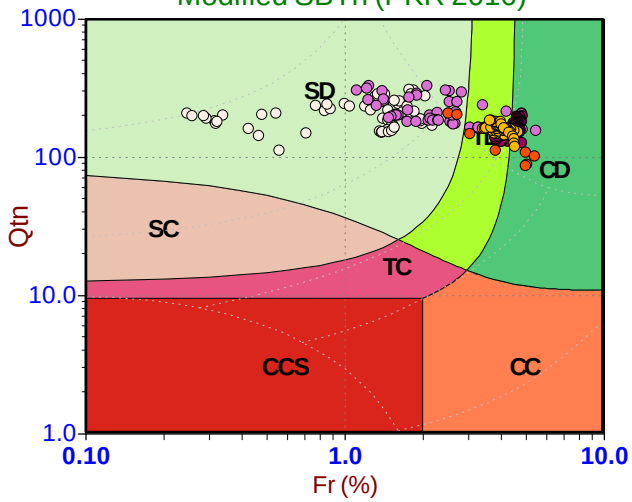

Standard SBT Chart (UBC 1986)

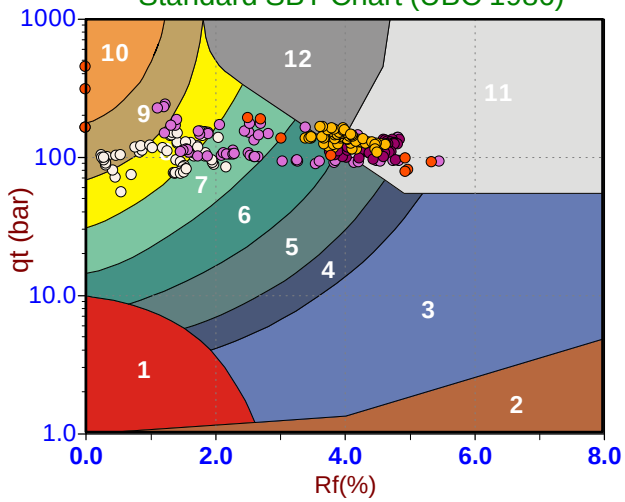

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-21 14:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT111
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

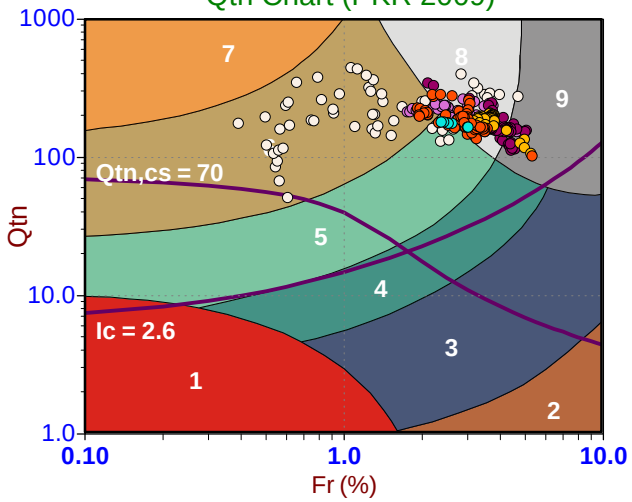

Modified SBTn (PKR 2016)

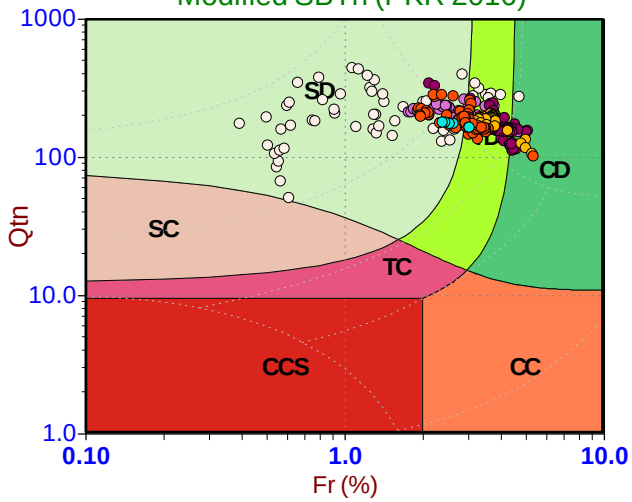

Standard SBT Chart (UBC 1986)

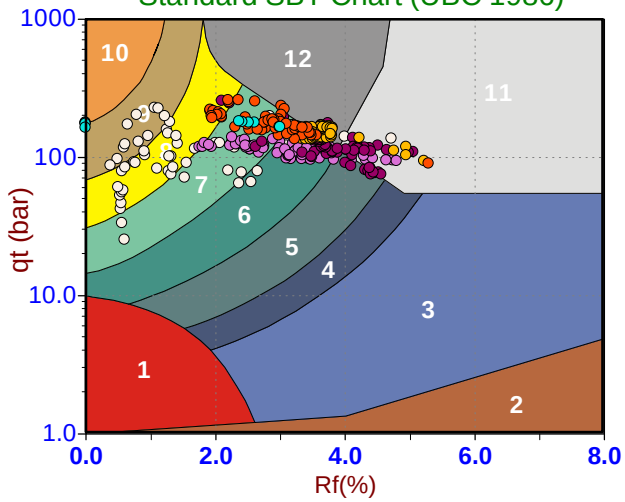

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-21 11:55
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT112
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

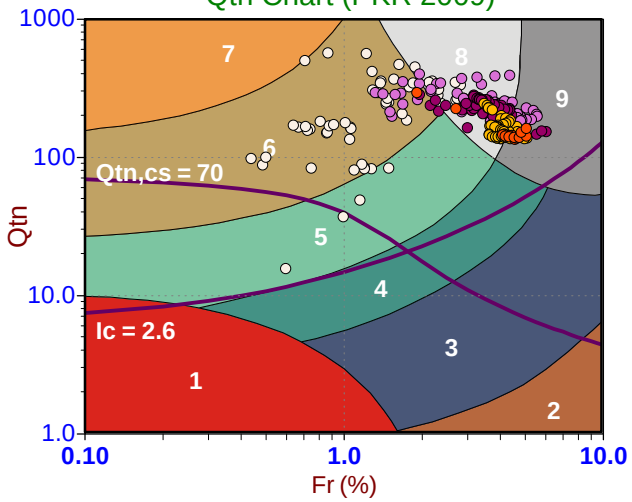

Modified SBTn (PKR 2016)

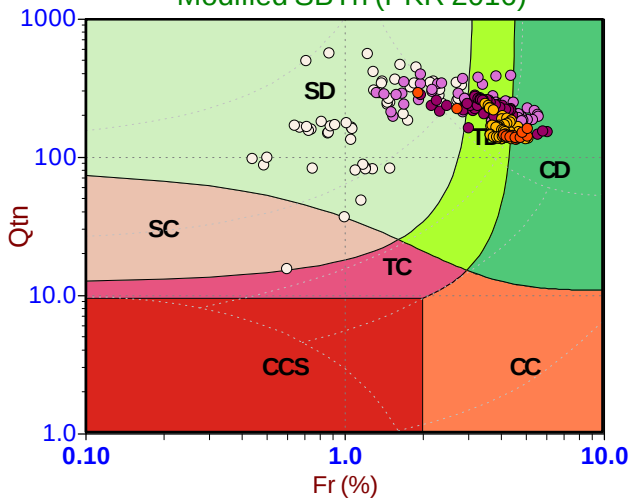

Standard SBT Chart (UBC 1986)

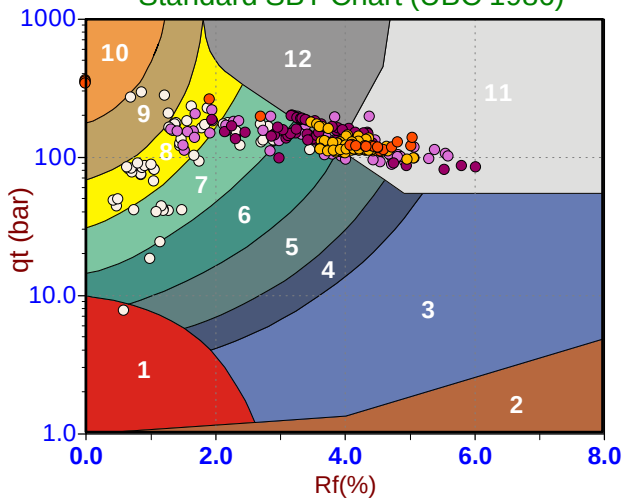

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-21 08:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT113
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

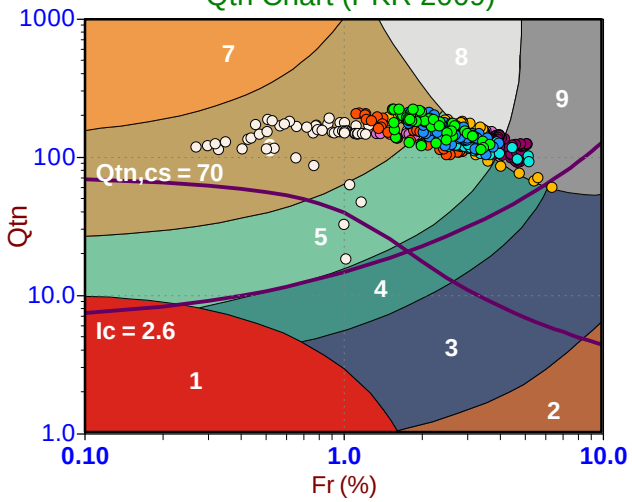

Modified SBTn (PKR 2016)

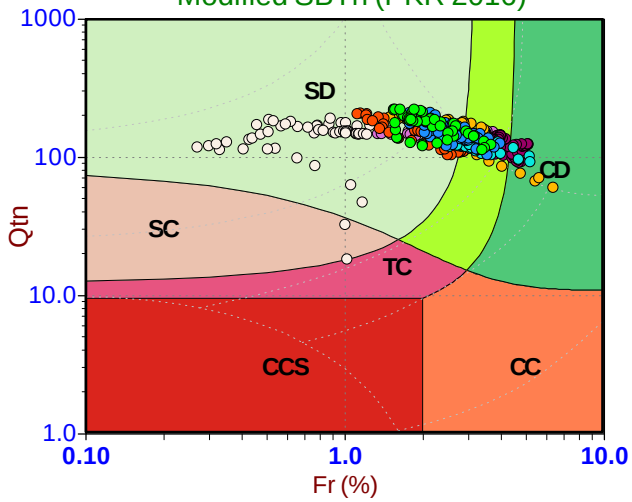

Standard SBT Chart (UBC 1986)

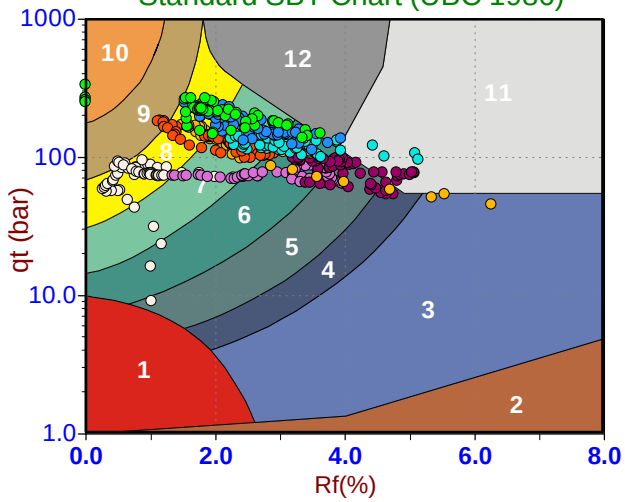

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-22 10:49
Site: Brooks, Alberta

Sounding: RCPT22-22CPT114
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

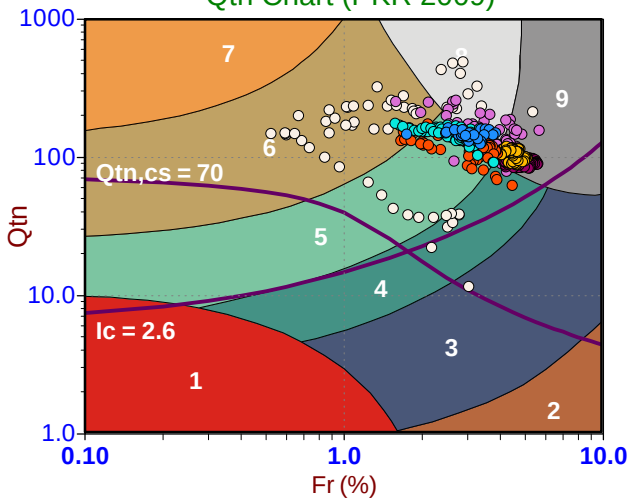

Modified SBTn (PKR 2016)

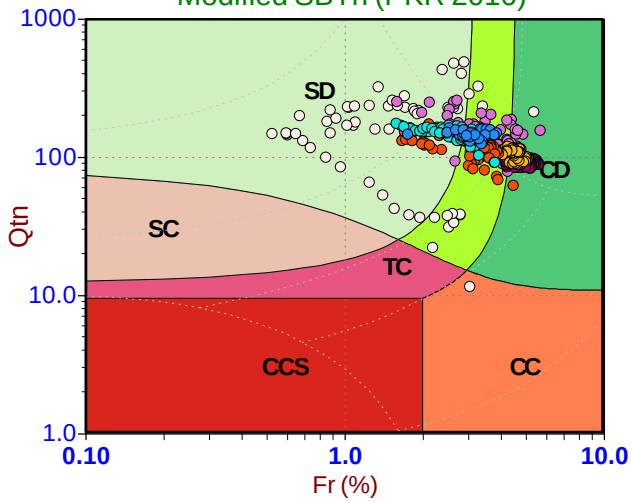

Standard SBT Chart (UBC 1986)

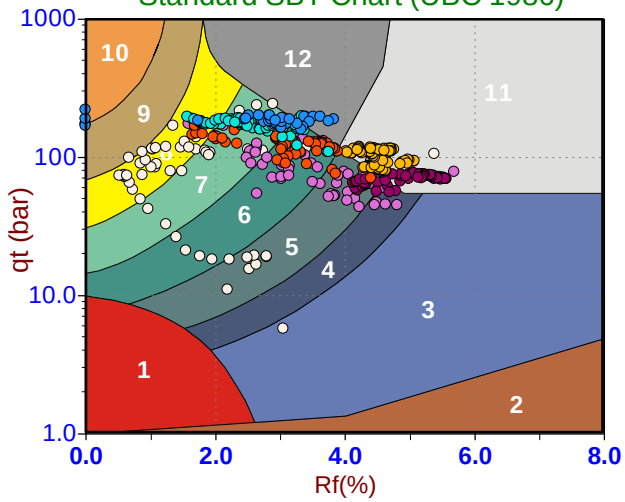

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-15 07:30
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT115
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

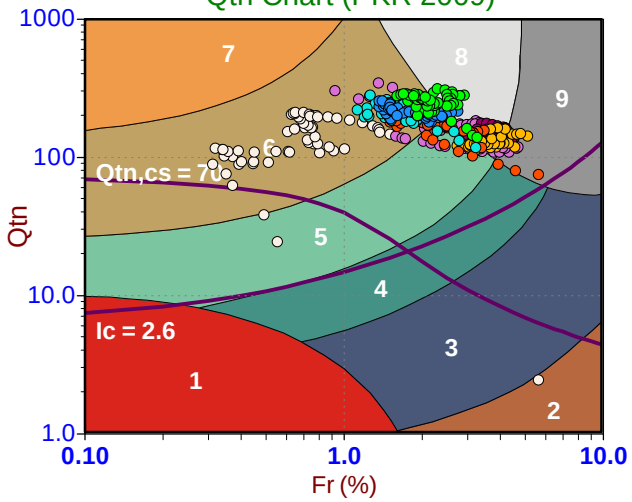

Modified SBTn (PKR 2016)

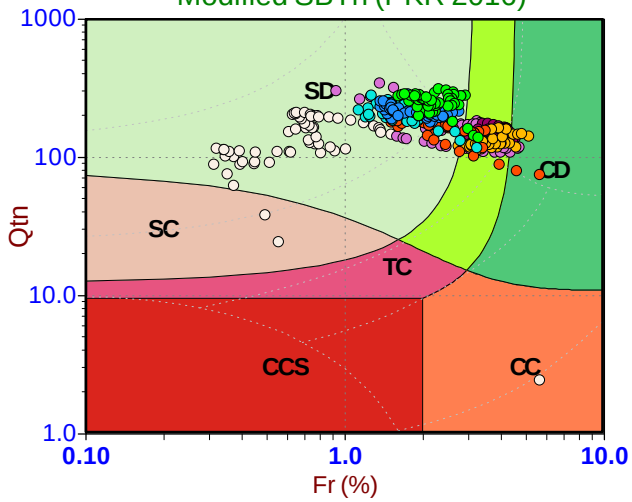

Standard SBT Chart (UBC 1986)

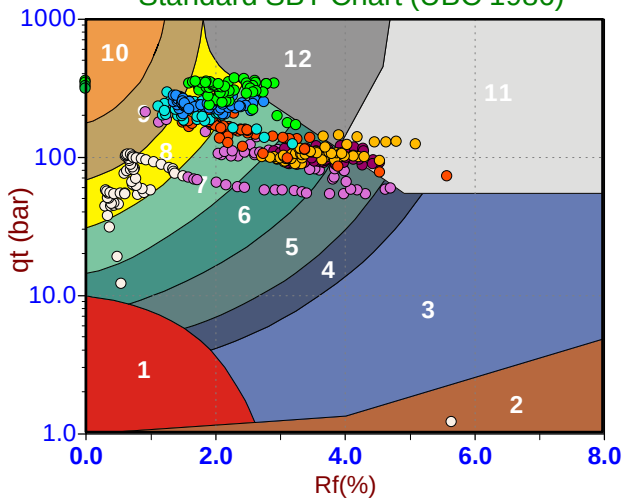

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-14 16:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT117
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

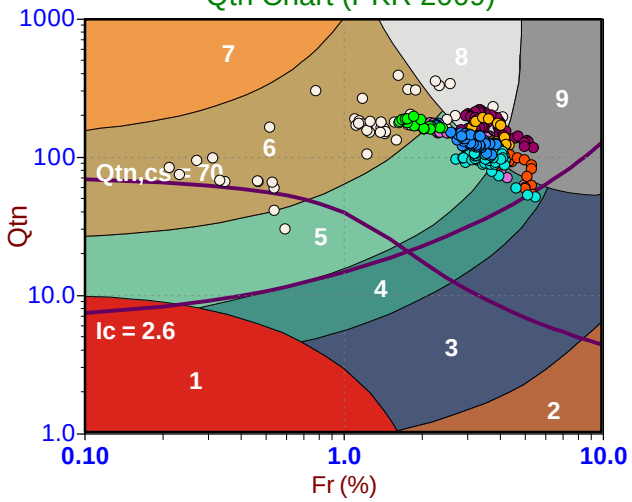

Modified SBTn (PKR 2016)

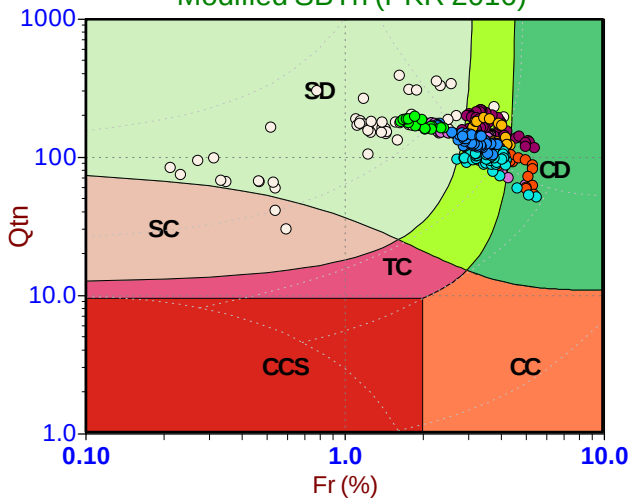

Standard SBT Chart (UBC 1986)

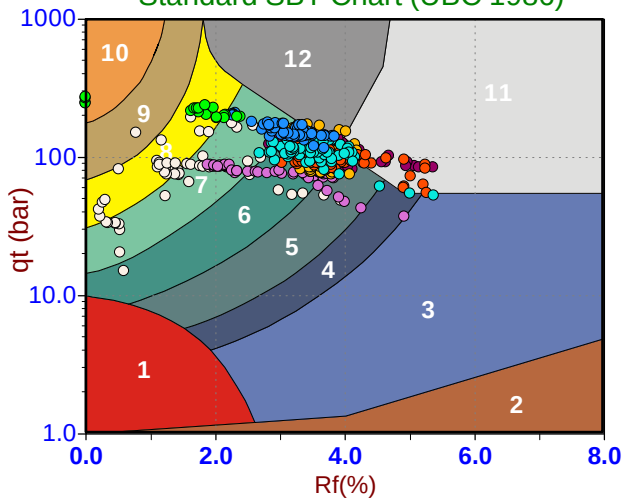

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 08:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT118
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

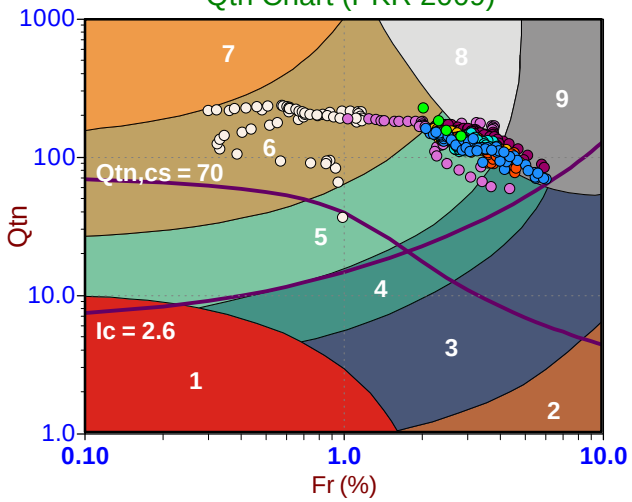

Modified SBTn (PKR 2016)

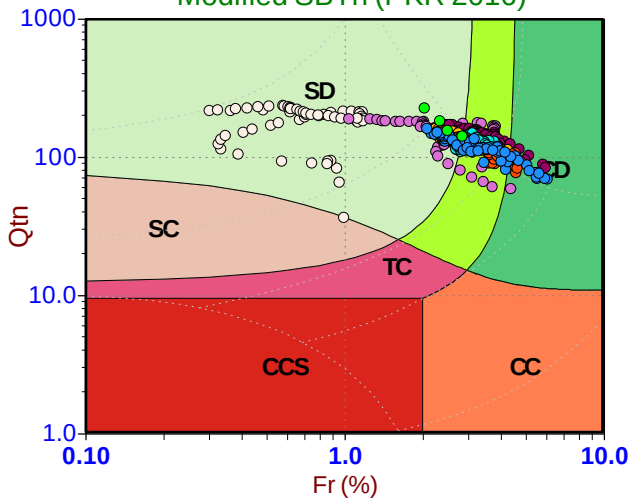

Standard SBT Chart (UBC 1986)

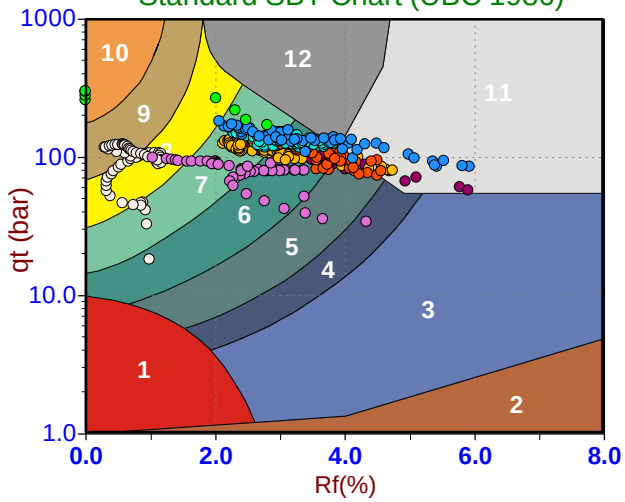

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 07:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT119
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

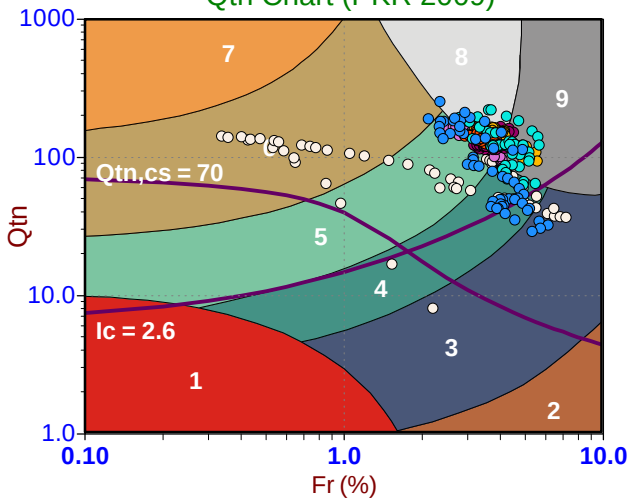

Modified SBTn (PKR 2016)

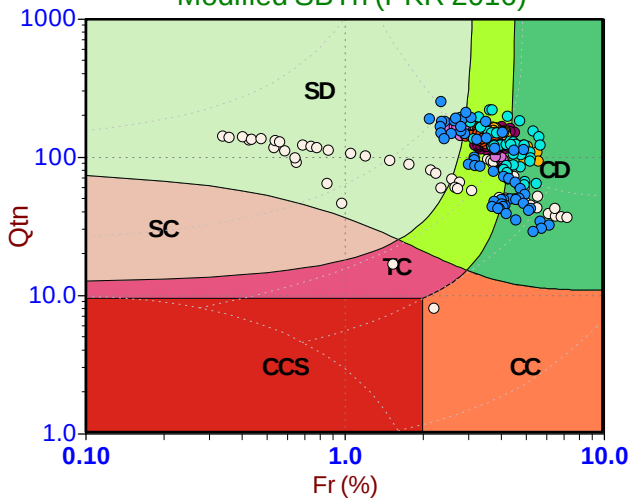

Standard SBT Chart (UBC 1986)

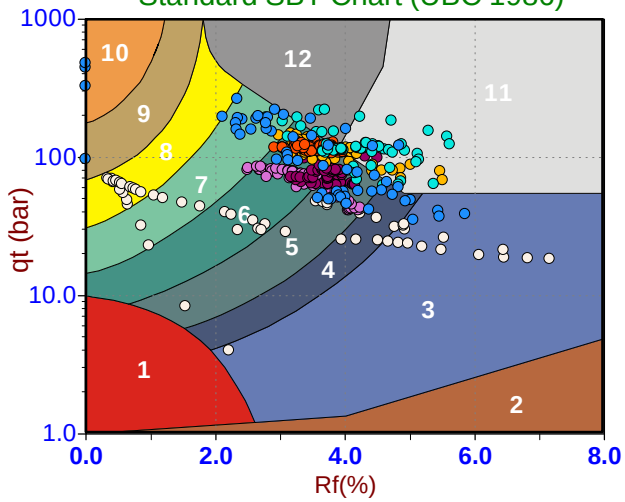

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-22 16:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT120
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

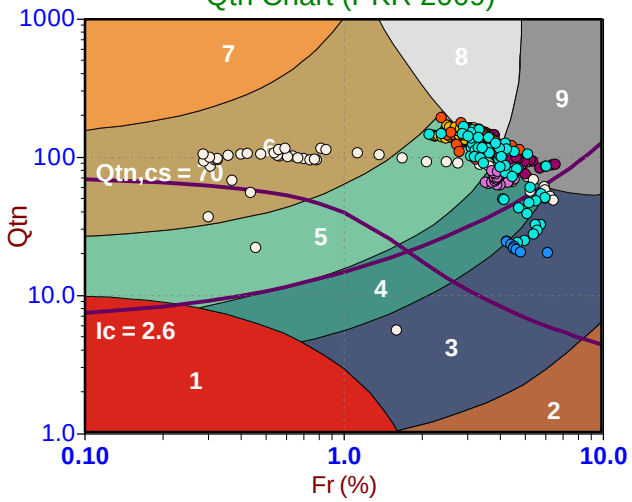

Modified SBTn (PKR 2016)

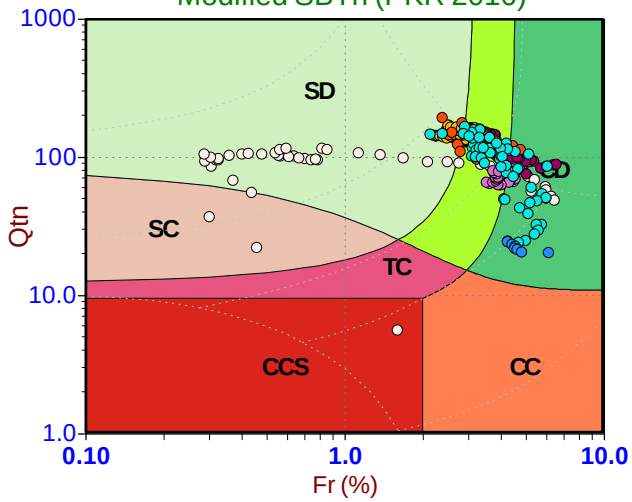

Standard SBT Chart (UBC 1986)

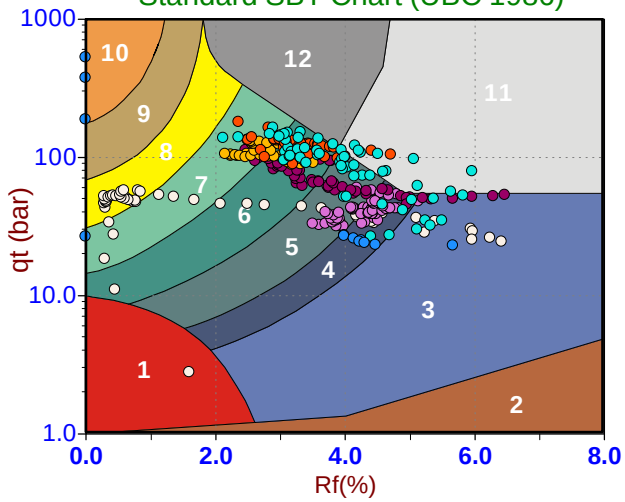

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-22 15:53
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT121
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

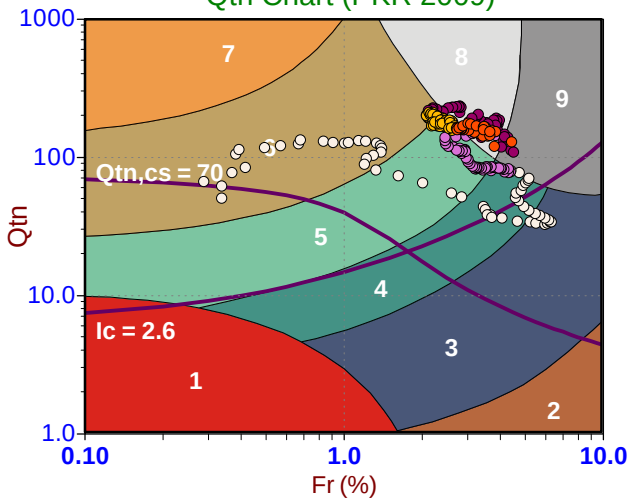

Modified SBTn (PKR 2016)

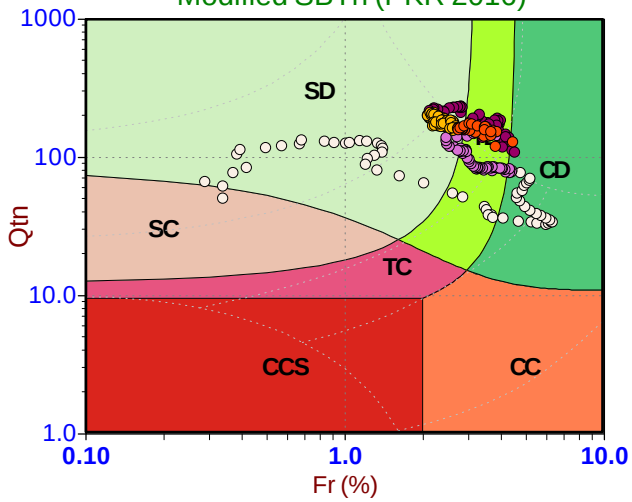

Standard SBT Chart (UBC 1986)

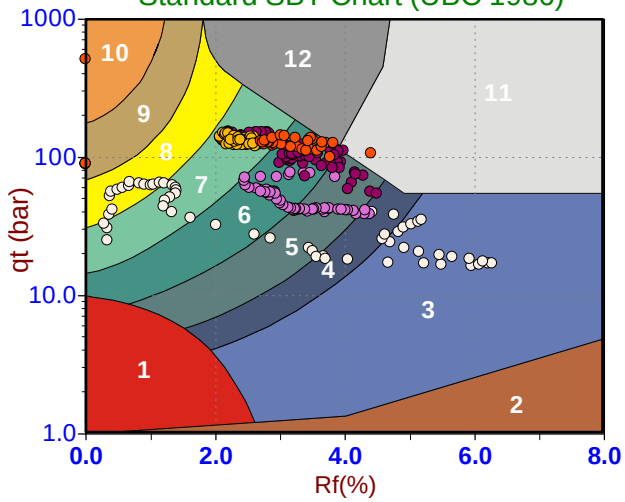

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-14 15:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT122
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

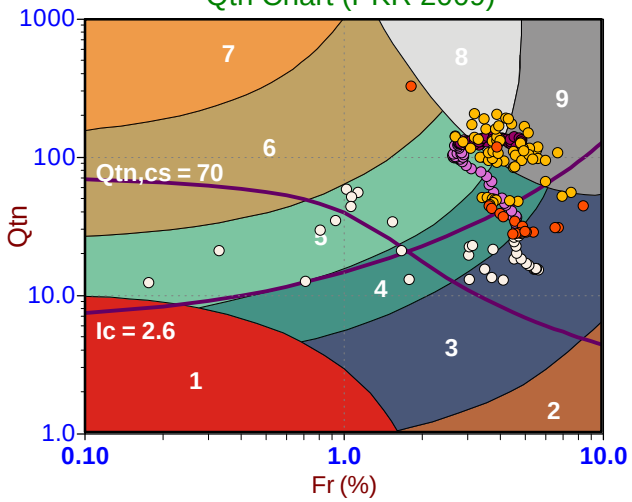

Modified SBTn (PKR 2016)

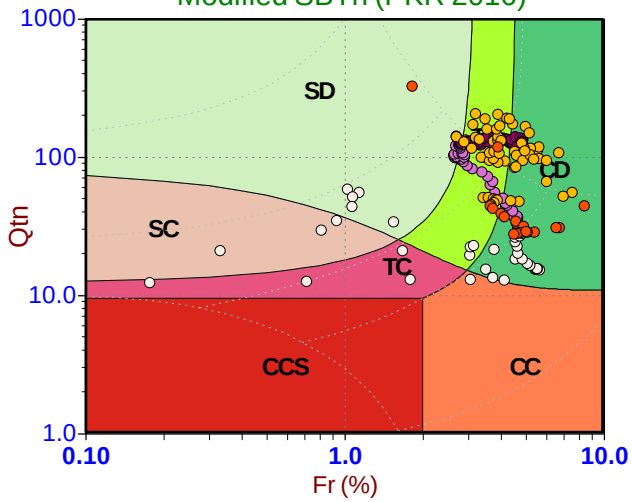

Standard SBT Chart (UBC 1986)

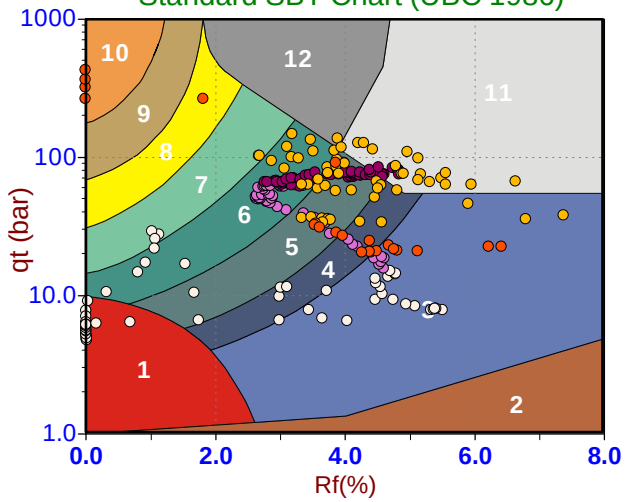

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-14 13:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT123
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

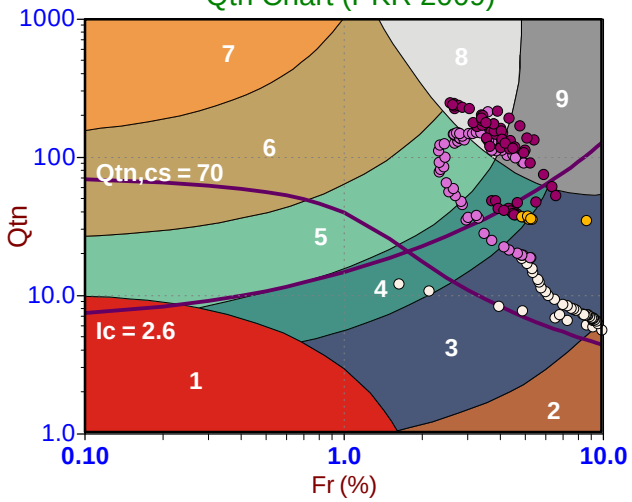

Modified SBTn (PKR 2016)

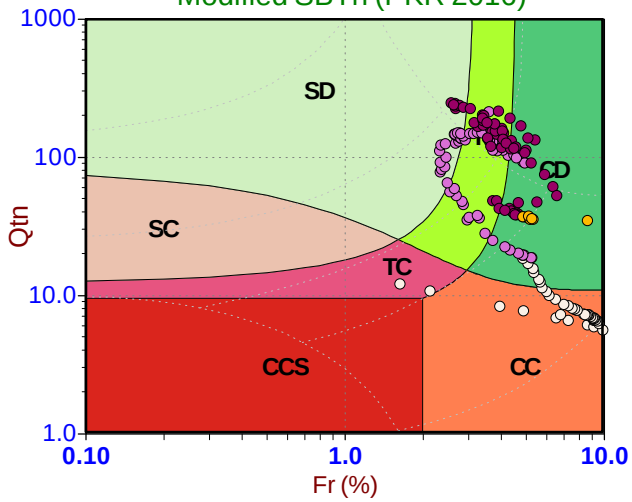

Standard SBT Chart (UBC 1986)

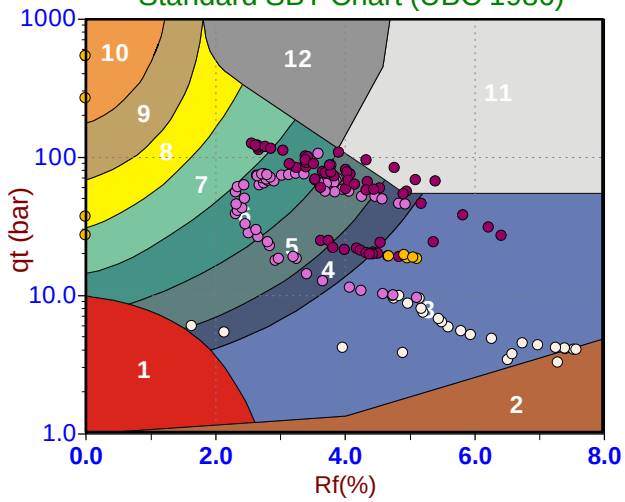

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-14 13:29
Site: Brooks, Alberta

Sounding: RCPT22-22CPT123B
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

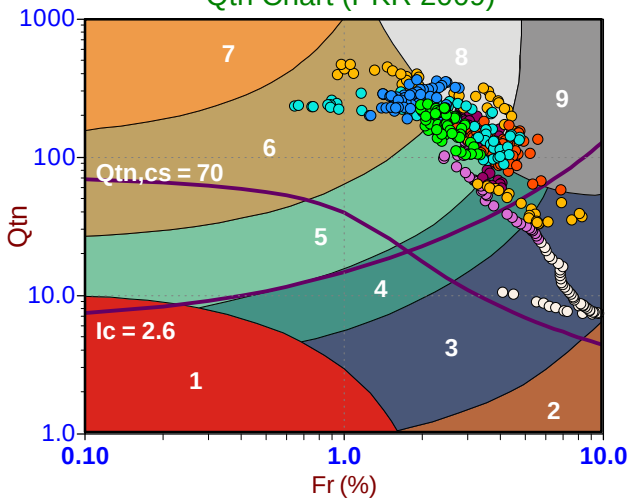

Modified SBTn (PKR 2016)

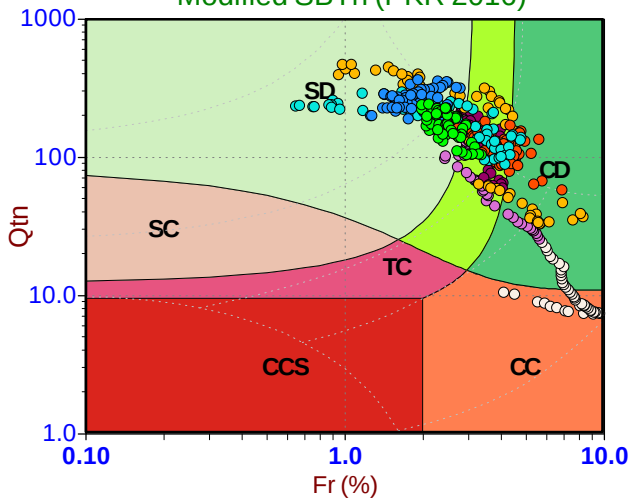

Standard SBT Chart (UBC 1986)

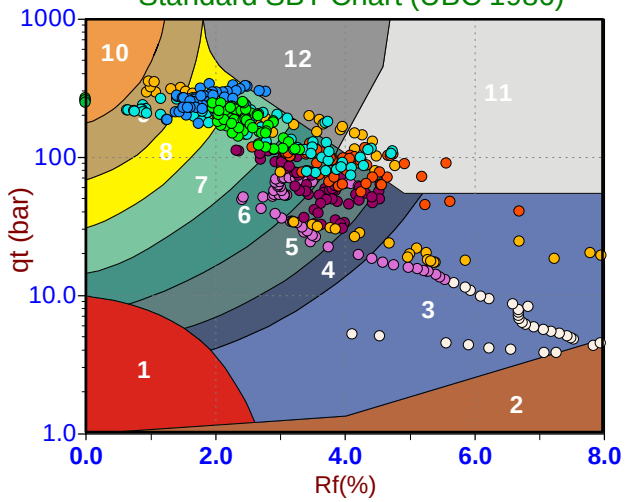

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-14 11:12
Site: Brooks, Alberta

Sounding: RCPT22-22CPT124
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

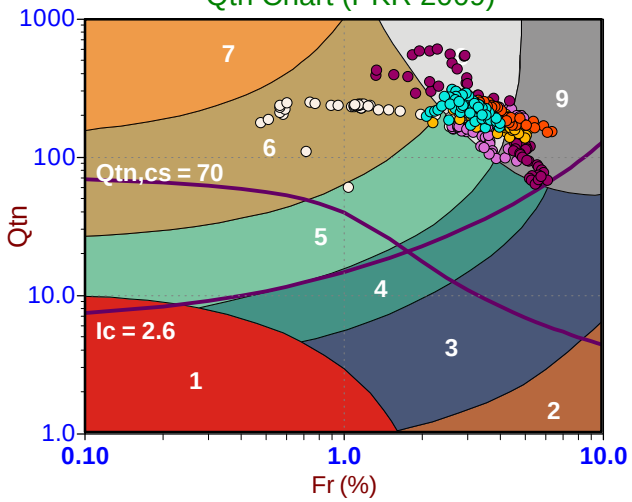

Modified SBTn (PKR 2016)

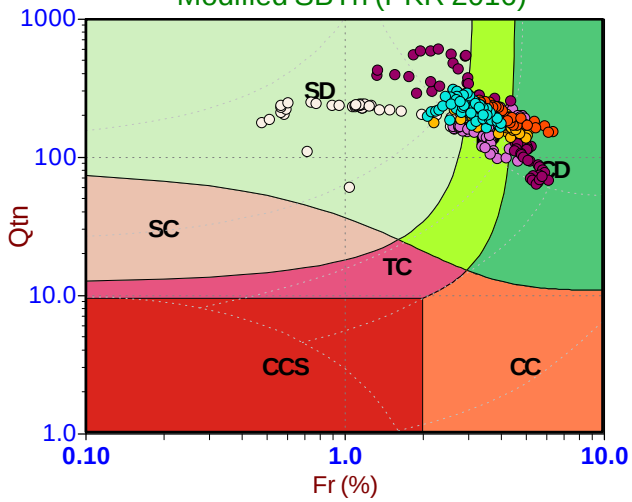

Standard SBT Chart (UBC 1986)

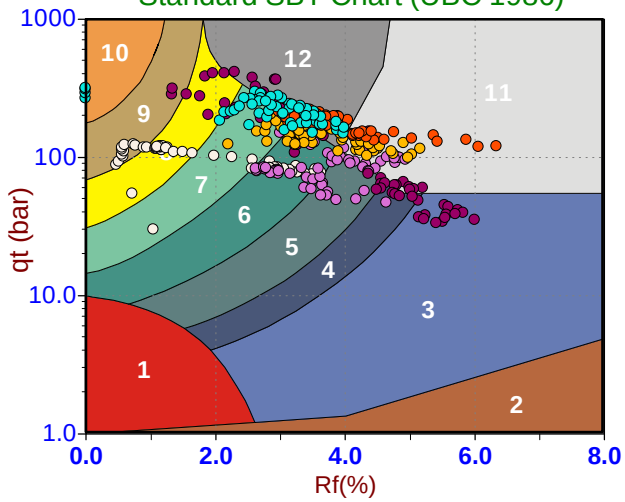

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-14 10:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT125
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

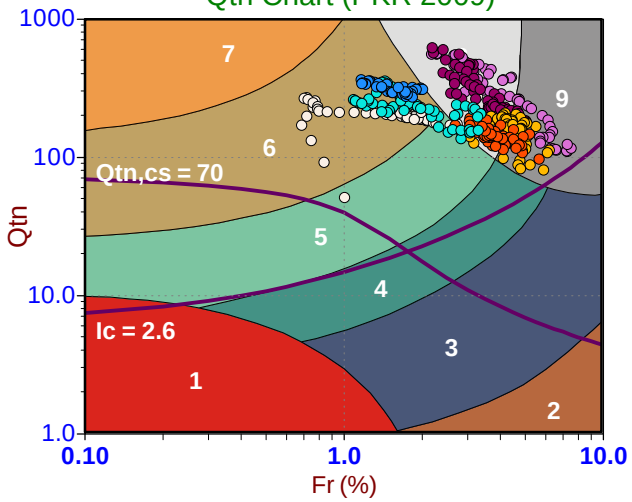

Modified SBTn (PKR 2016)

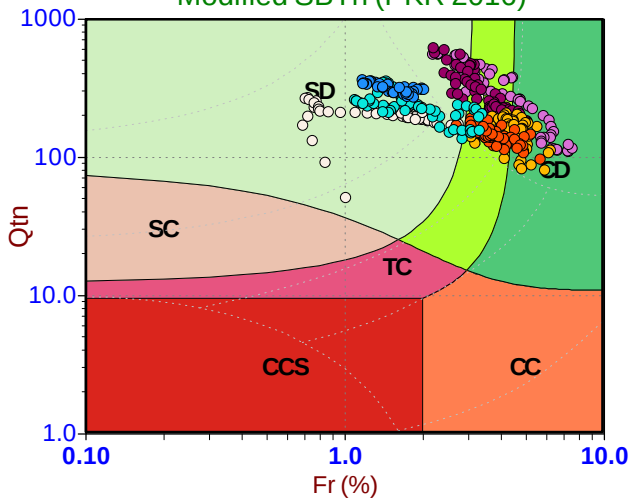

Standard SBT Chart (UBC 1986)

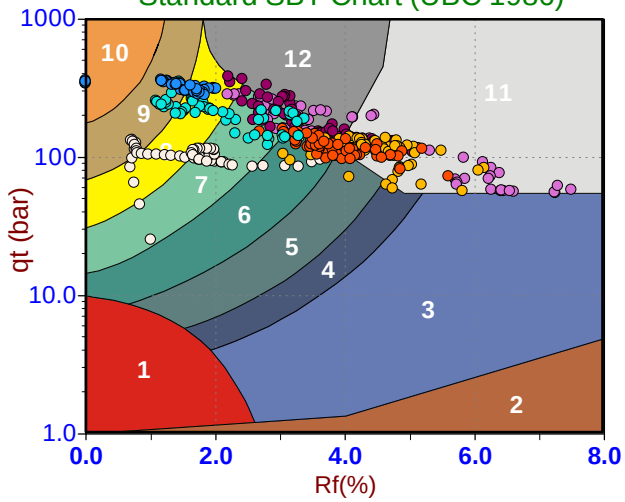

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 12:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT126
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

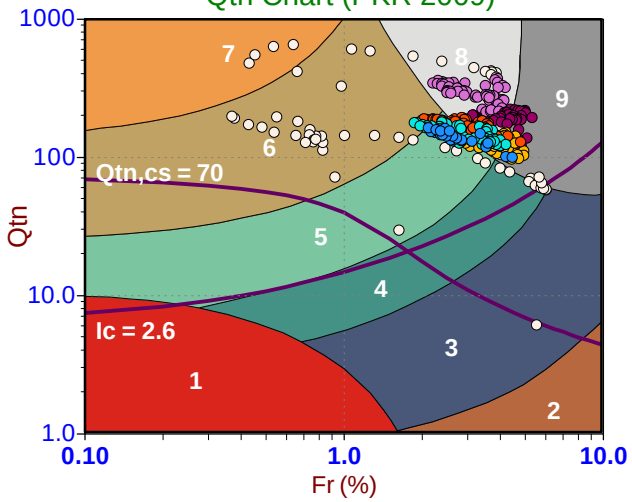

Modified SBTn (PKR 2016)

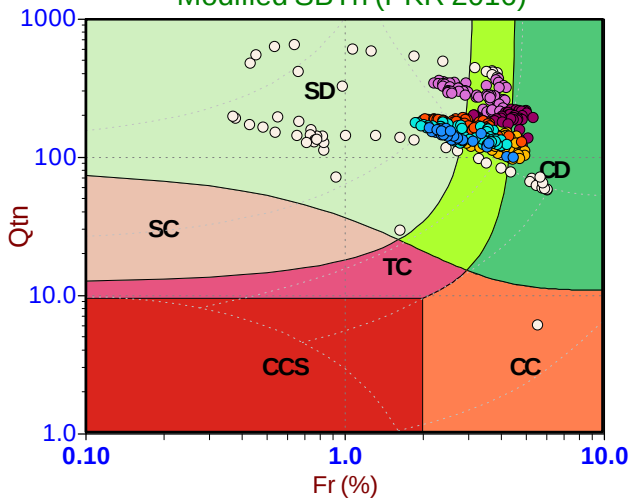

Standard SBT Chart (UBC 1986)

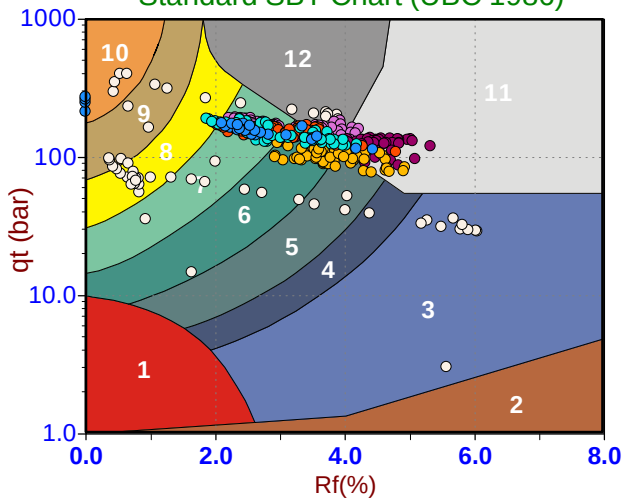

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 11:19
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT127
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

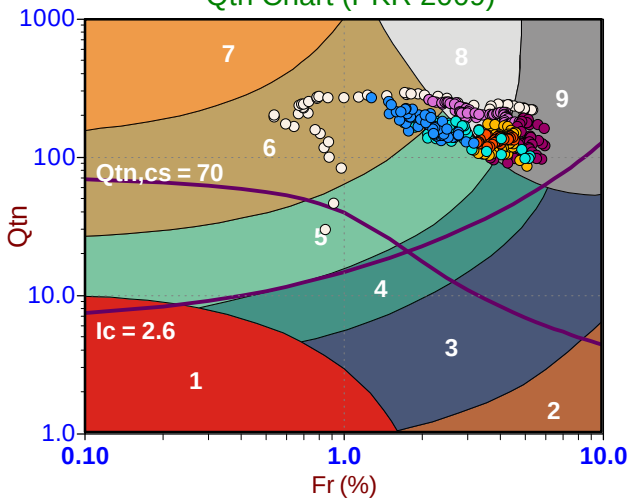

Modified SBTn (PKR 2016)

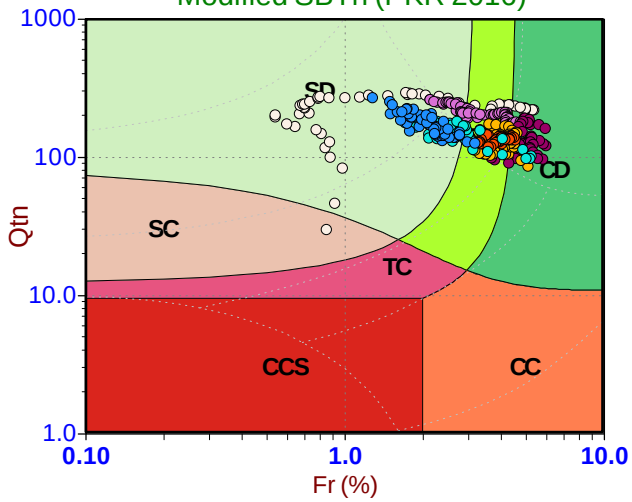

Standard SBT Chart (UBC 1986)

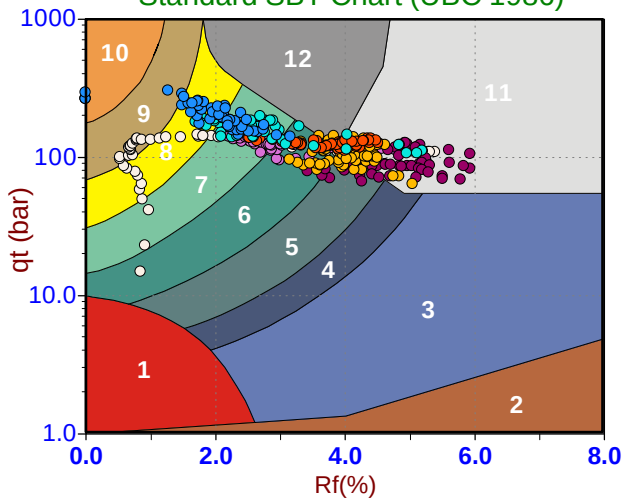

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 09:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT128
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

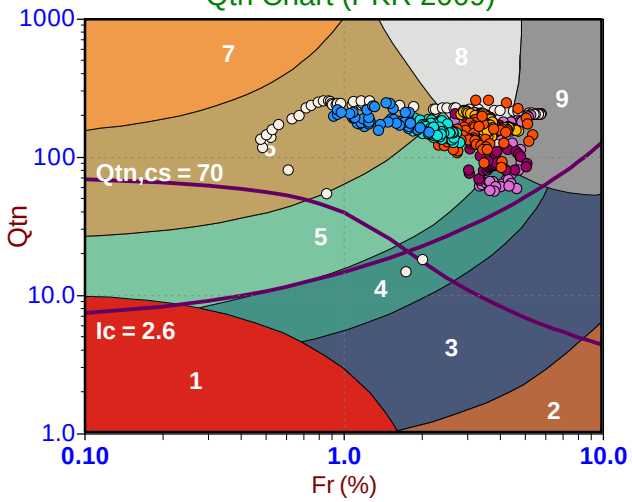

Modified SBTn (PKR 2016)

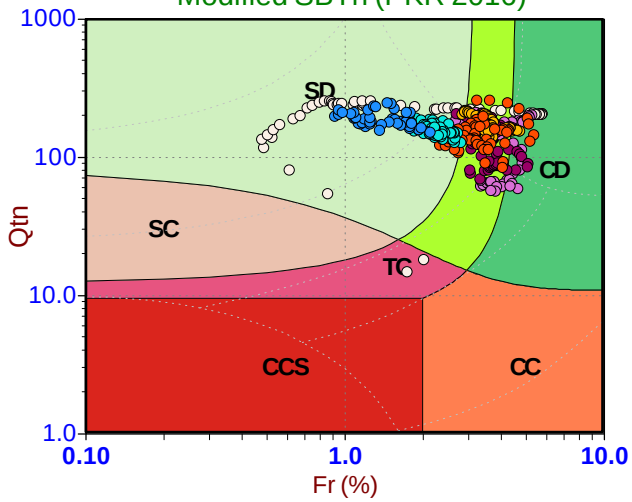

Standard SBT Chart (UBC 1986)

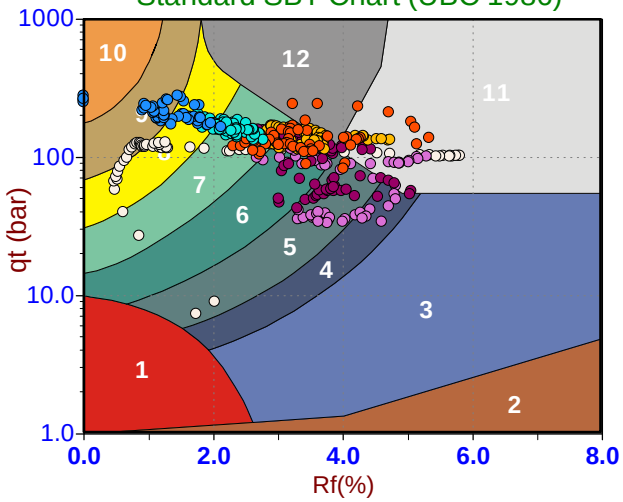

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-14 08:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

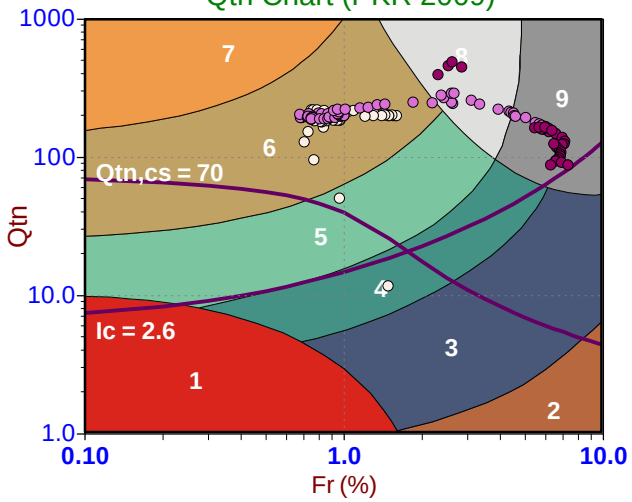

Modified SBTn (PKR 2016)

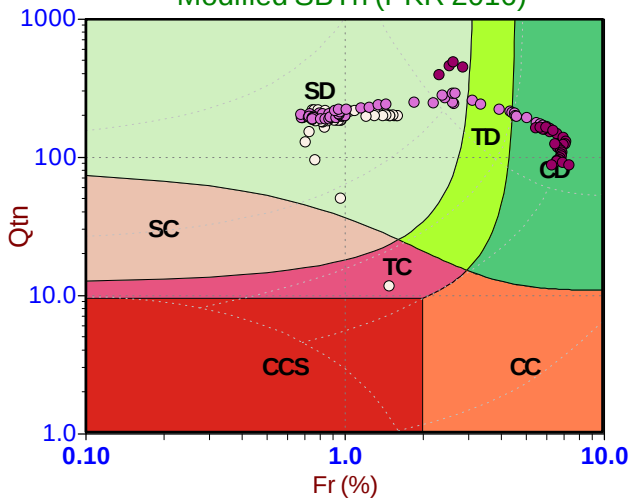

Standard SBT Chart (UBC 1986)

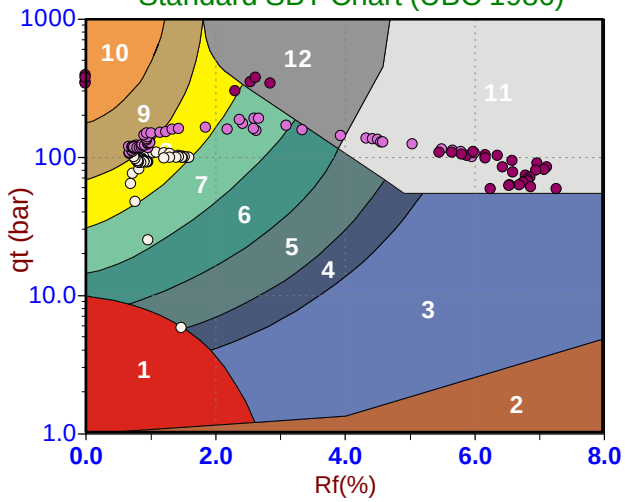

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-14 08:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129B
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

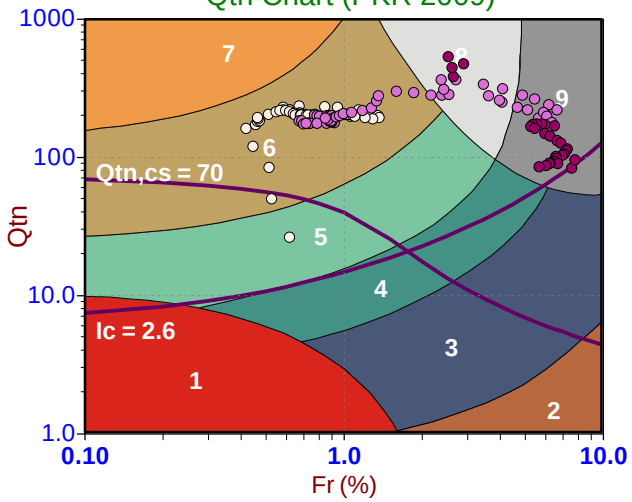

Modified SBTn (PKR 2016)

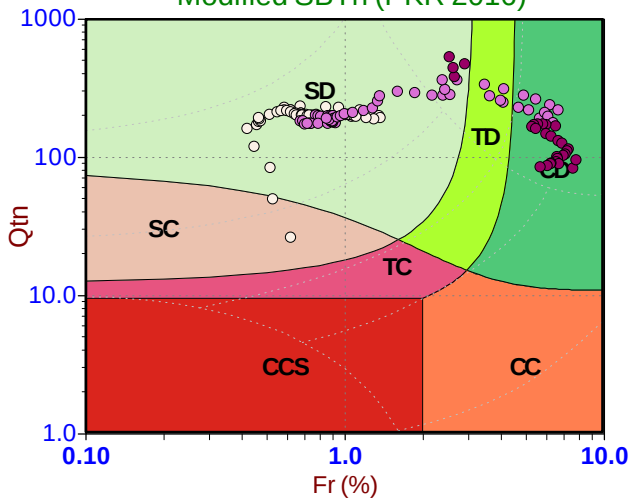

Standard SBT Chart (UBC 1986)

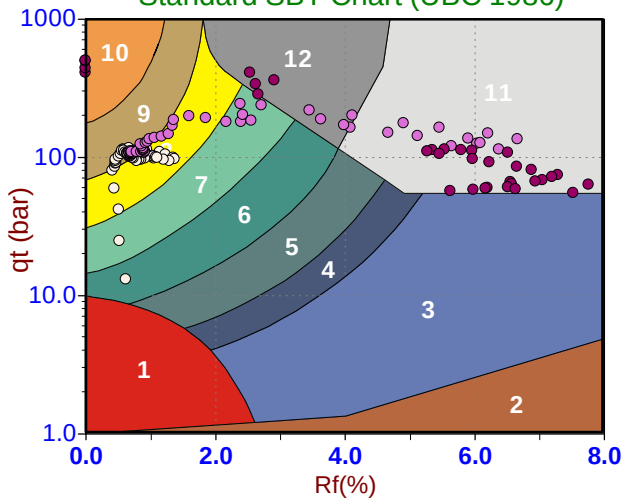

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-14 09:28
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129C
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

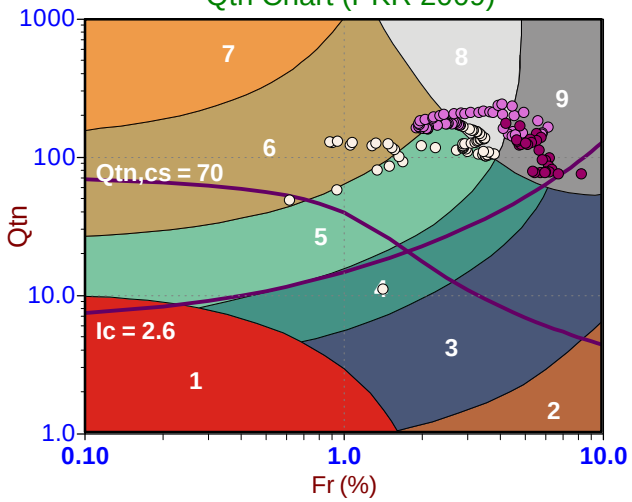

Modified SBTn (PKR 2016)

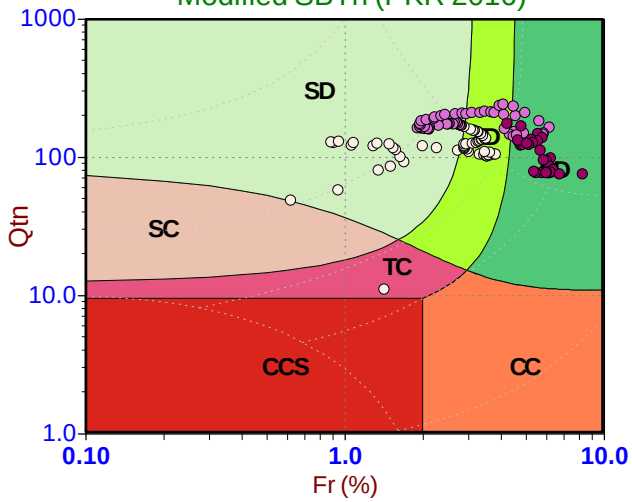

Standard SBT Chart (UBC 1986)

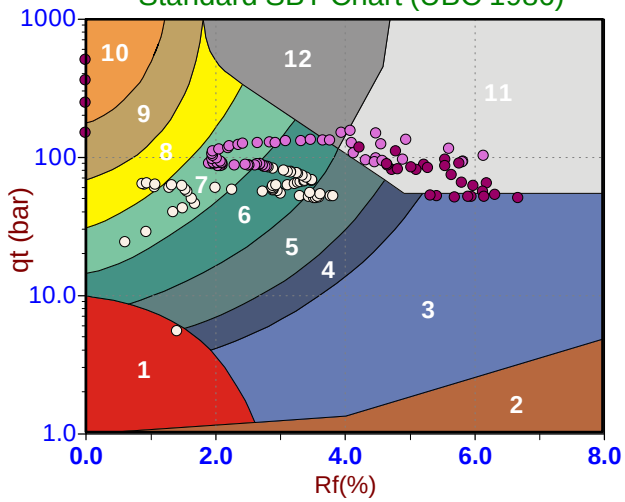

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-13 16:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT130
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

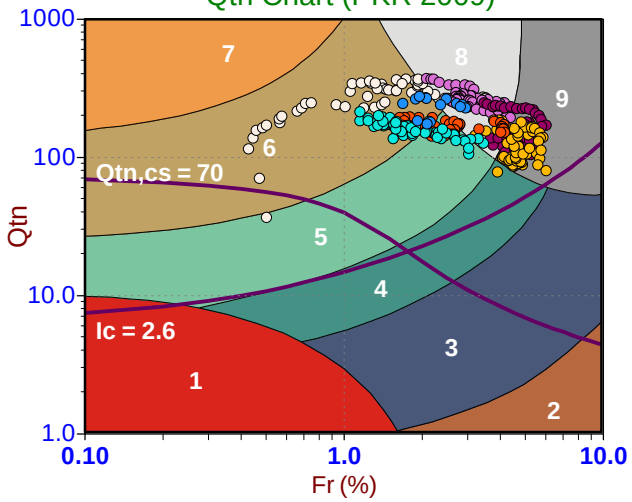

Modified SBTn (PKR 2016)

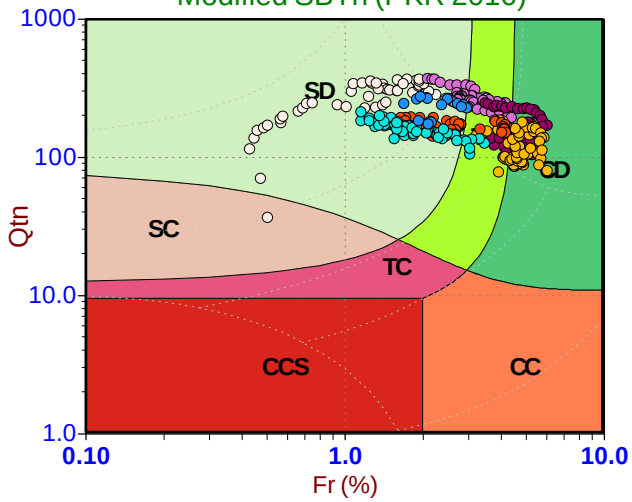

Standard SBT Chart (UBC 1986)

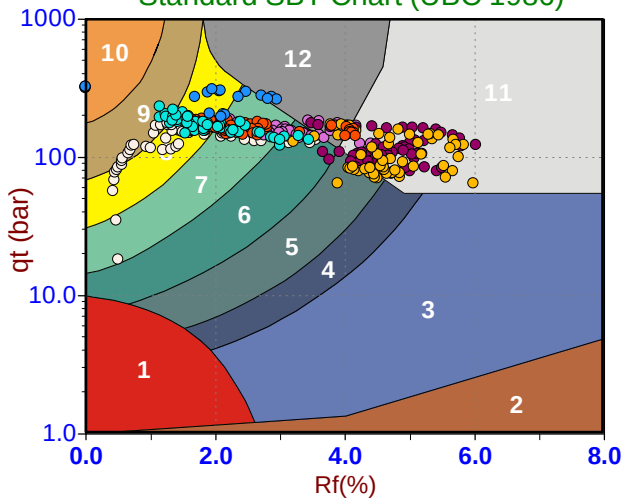

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 14:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT131
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

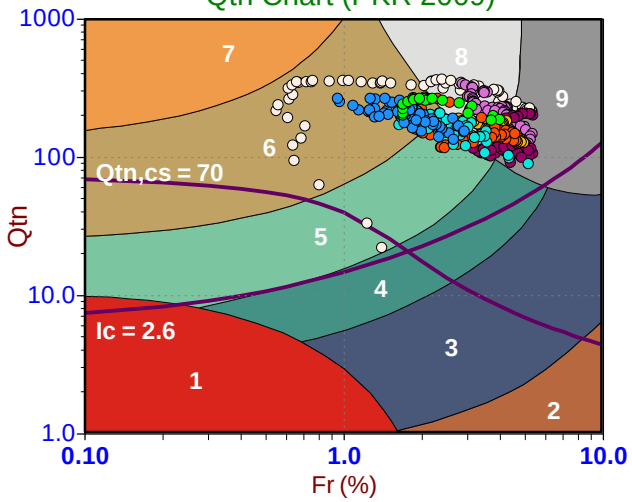

Modified SBTn (PKR 2016)

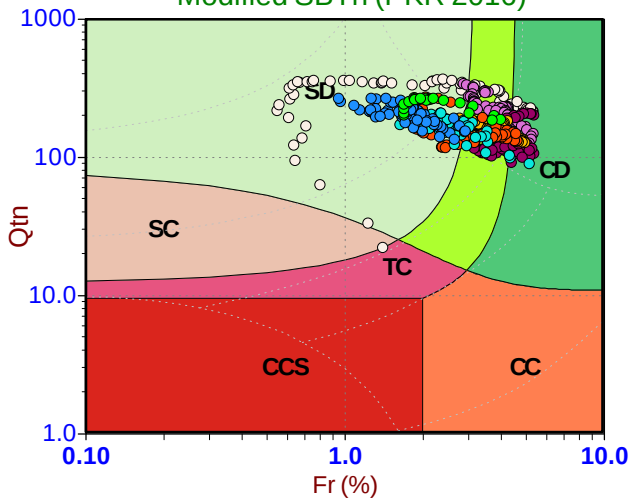

Standard SBT Chart (UBC 1986)

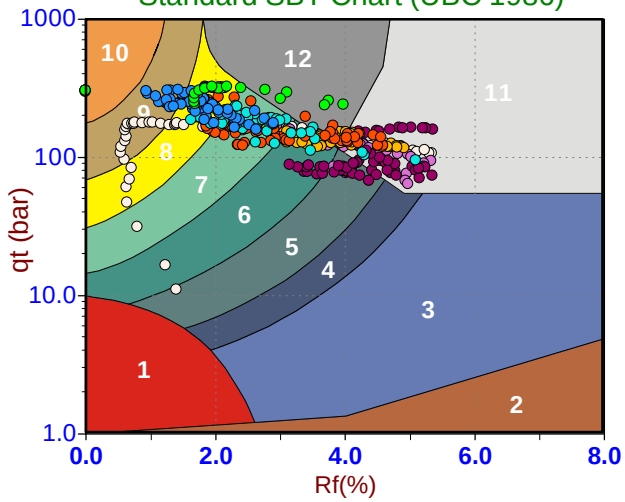

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-15 11:02
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131E
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

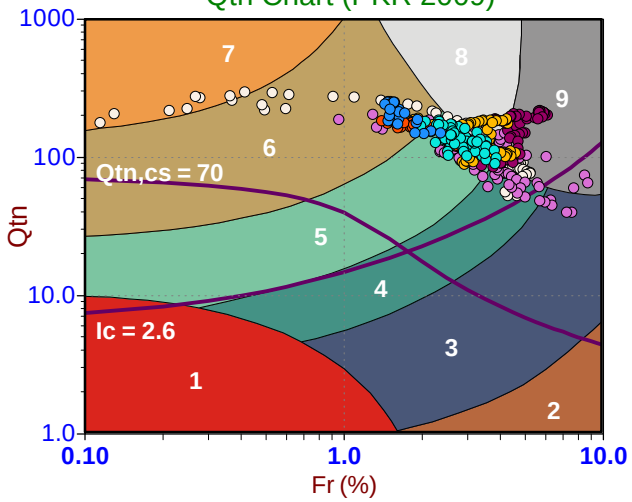

Modified SBTn (PKR 2016)

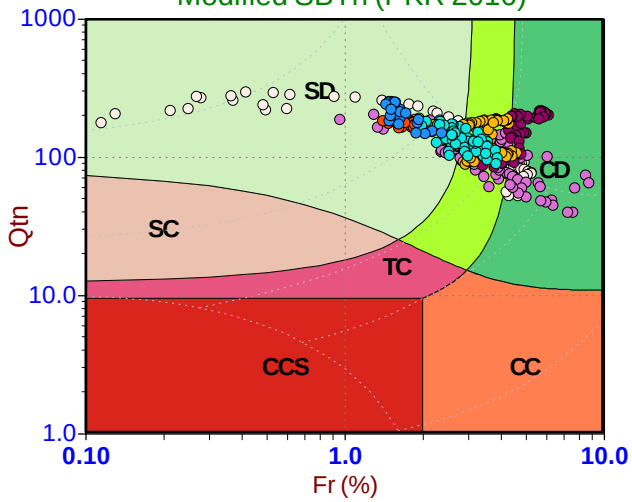

Standard SBT Chart (UBC 1986)

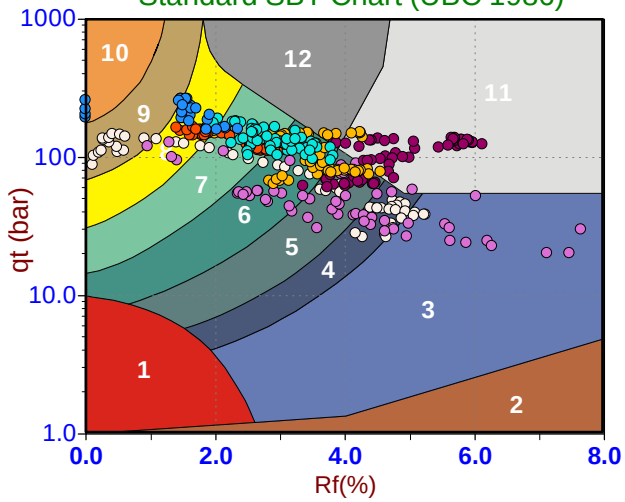

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-15 09:17
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131N
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

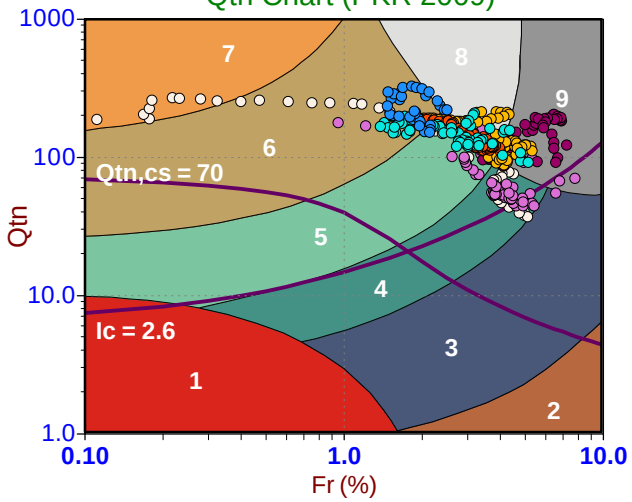

Modified SBTn (PKR 2016)

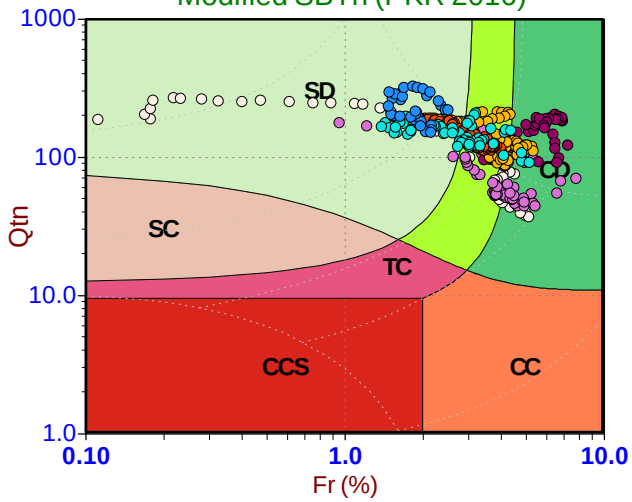

Standard SBT Chart (UBC 1986)

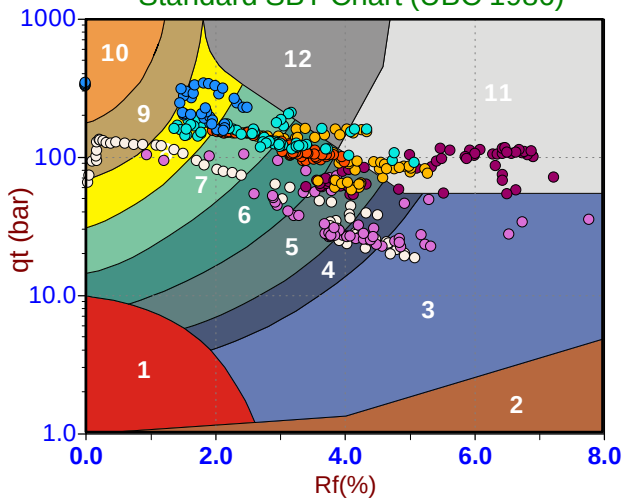

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-15 11:46
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131S1
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

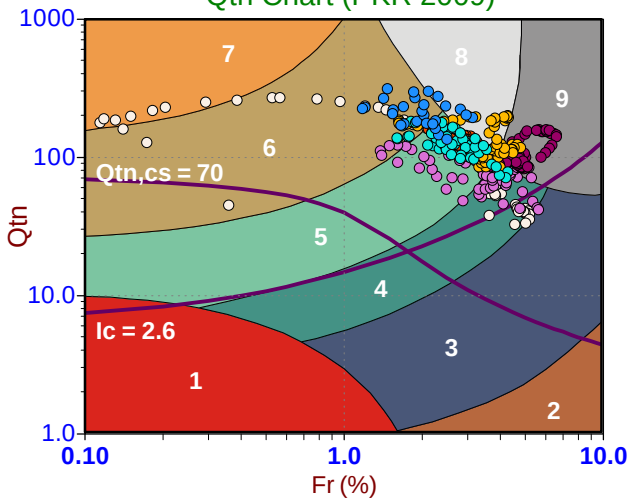

Modified SBTn (PKR 2016)

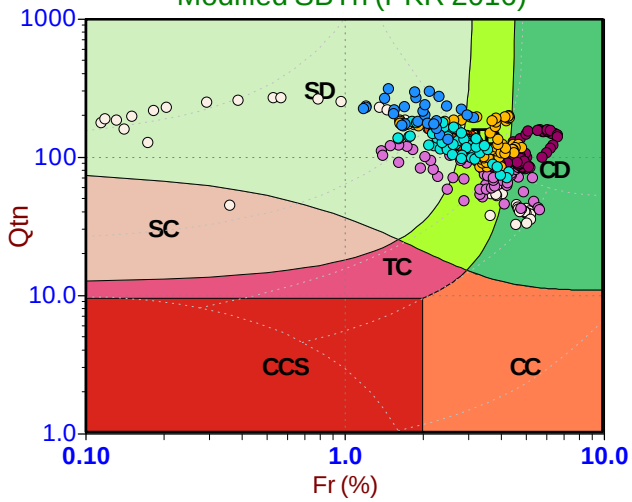

Standard SBT Chart (UBC 1986)

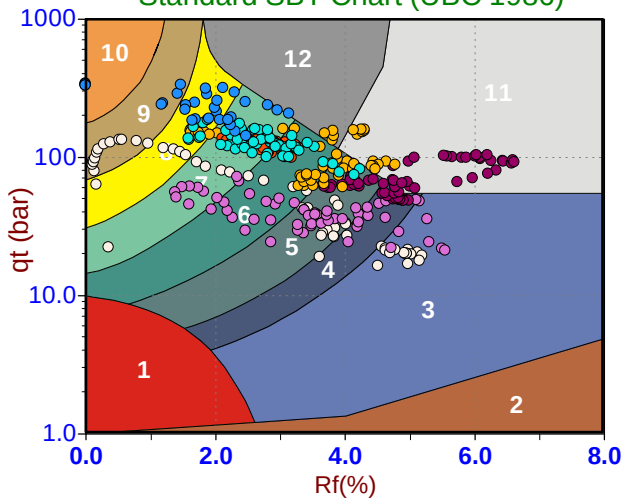

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-15 10:23
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131S2
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

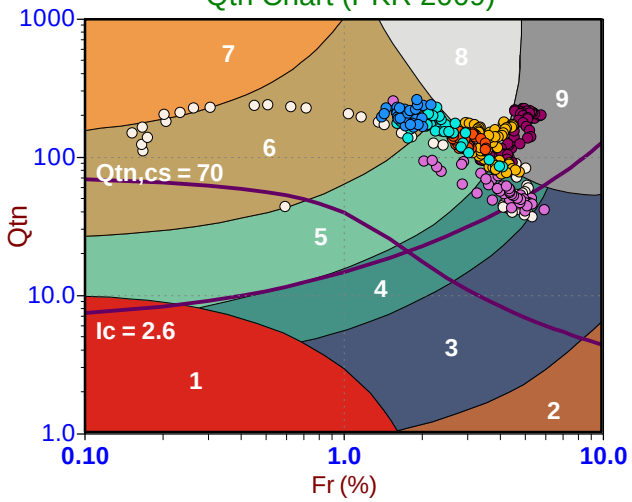

Modified SBTn (PKR 2016)

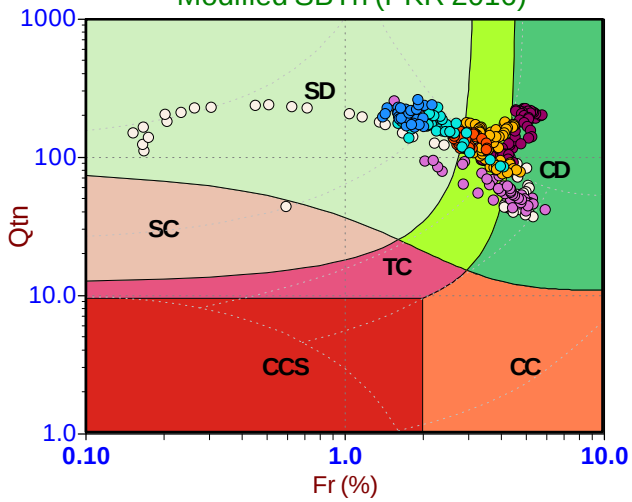

Standard SBT Chart (UBC 1986)

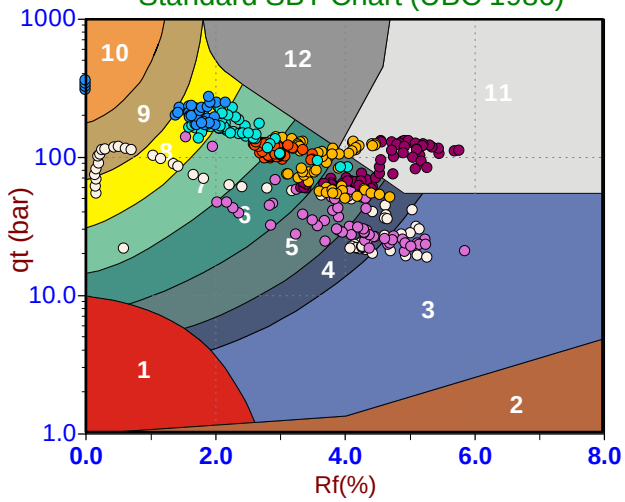

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 16:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT132
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

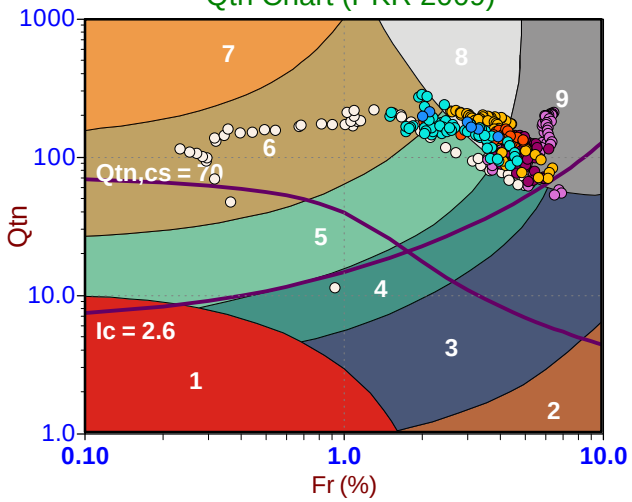

Modified SBTn (PKR 2016)

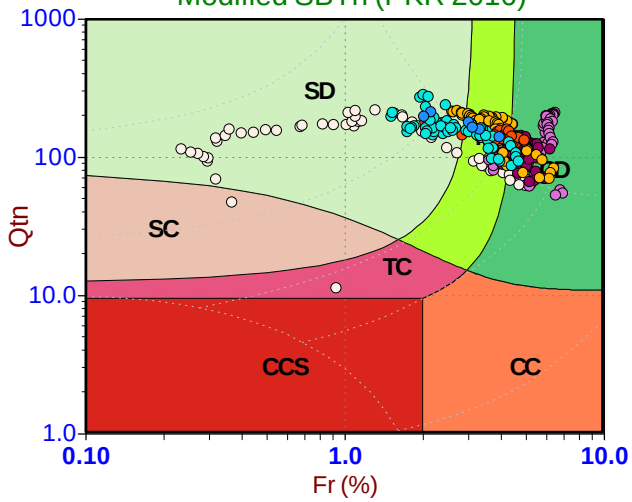

Standard SBT Chart (UBC 1986)

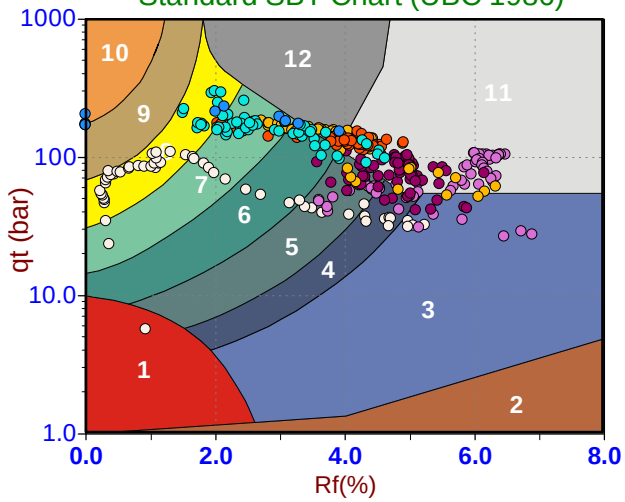

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-24 07:06
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT133
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

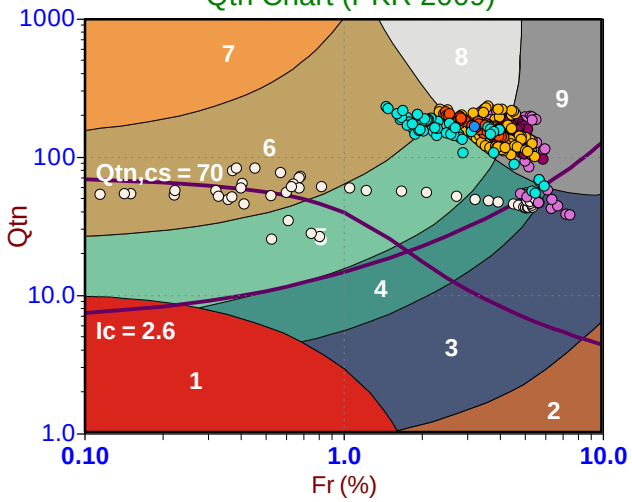

Modified SBTn (PKR 2016)

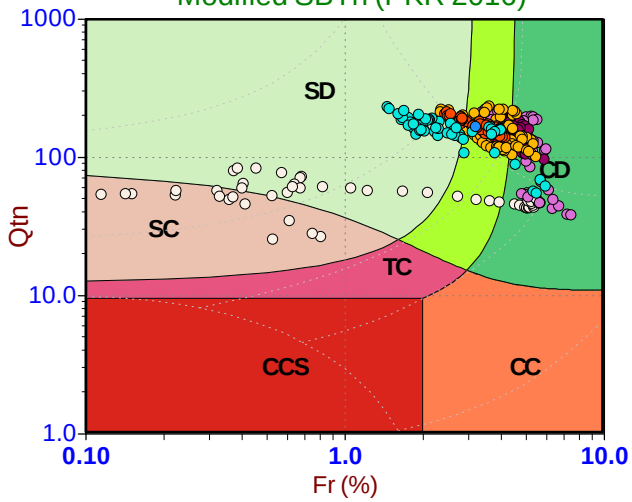

Standard SBT Chart (UBC 1986)

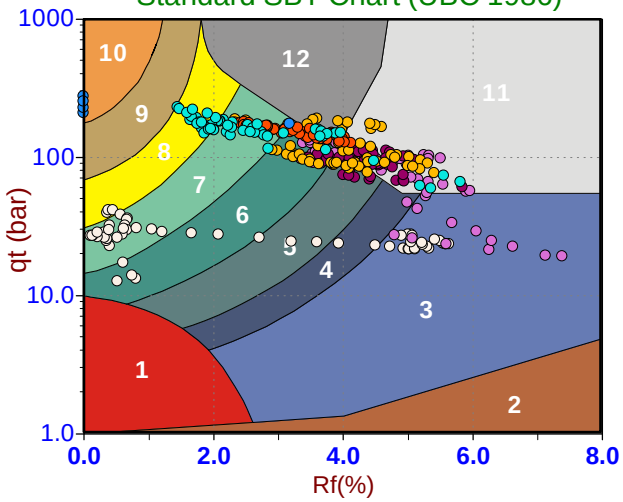

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-24 08:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT134
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

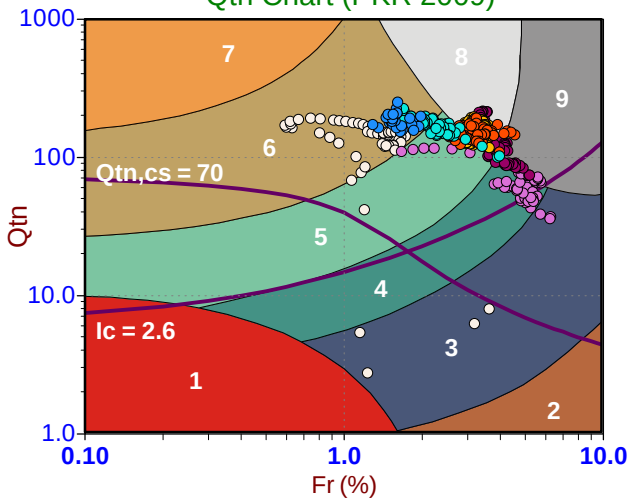

Modified SBTn (PKR 2016)

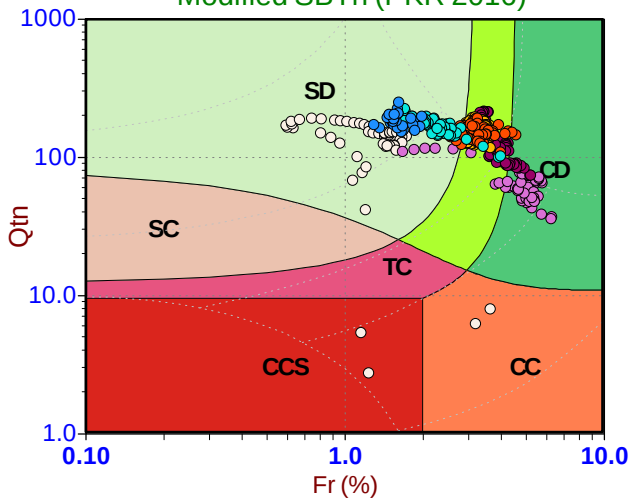

Standard SBT Chart (UBC 1986)

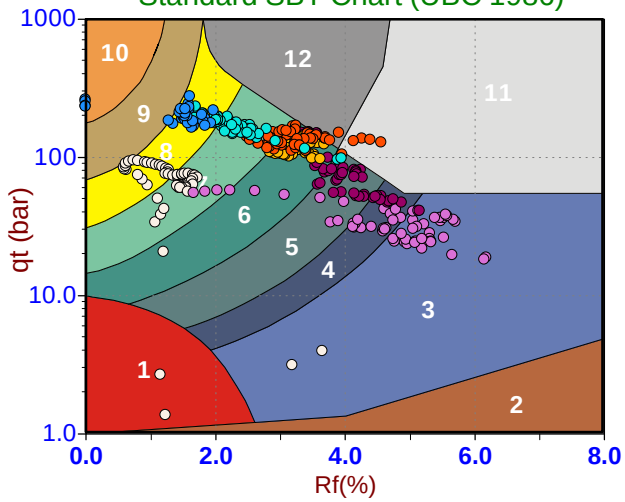

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-24 10:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT135
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

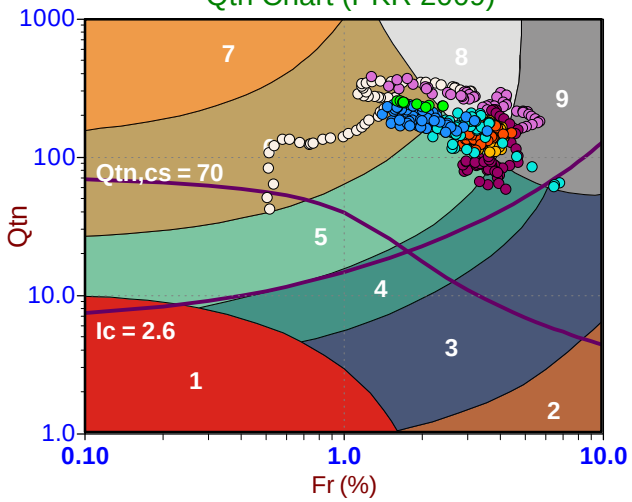

Modified SBTn (PKR 2016)

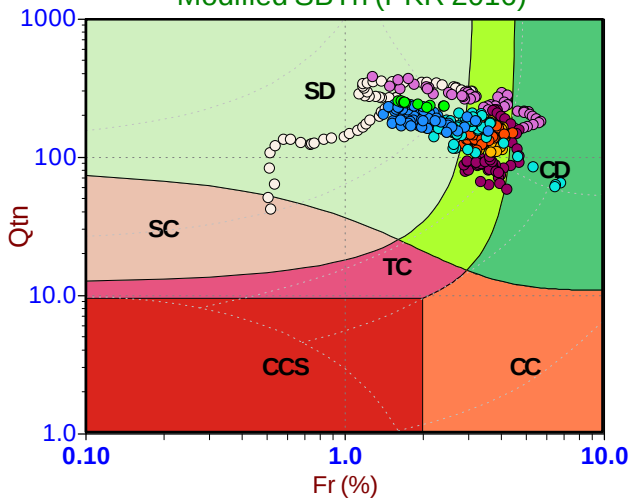

Standard SBT Chart (UBC 1986)

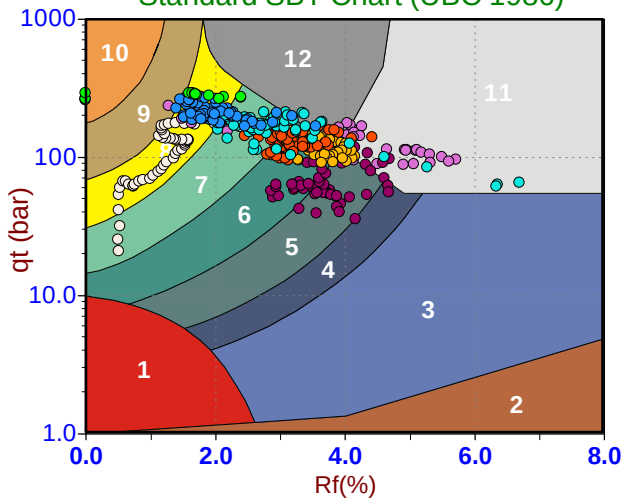

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-24 11:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT136
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

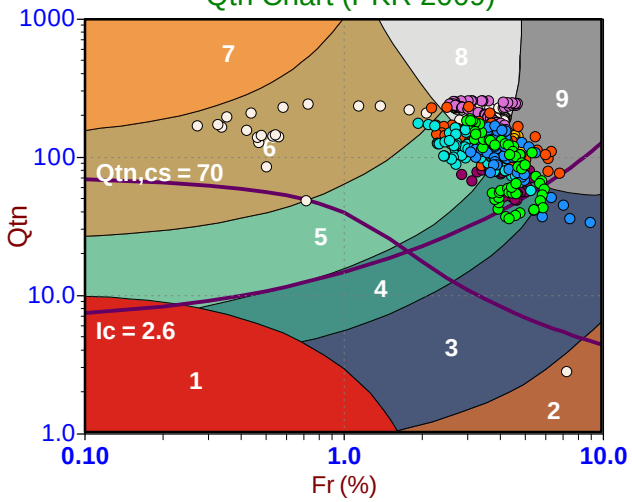

Modified SBTn (PKR 2016)

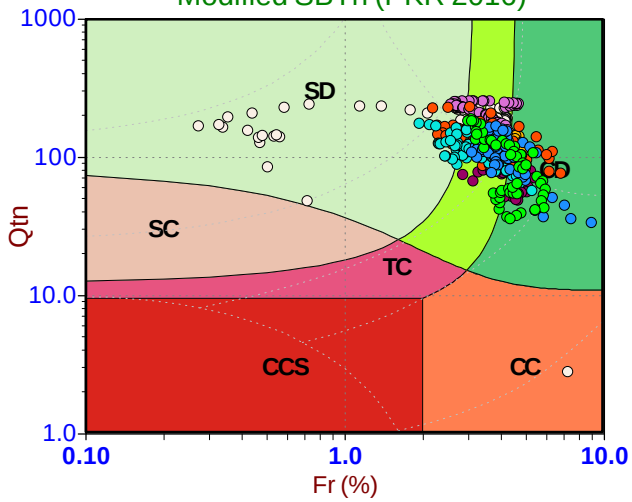

Standard SBT Chart (UBC 1986)

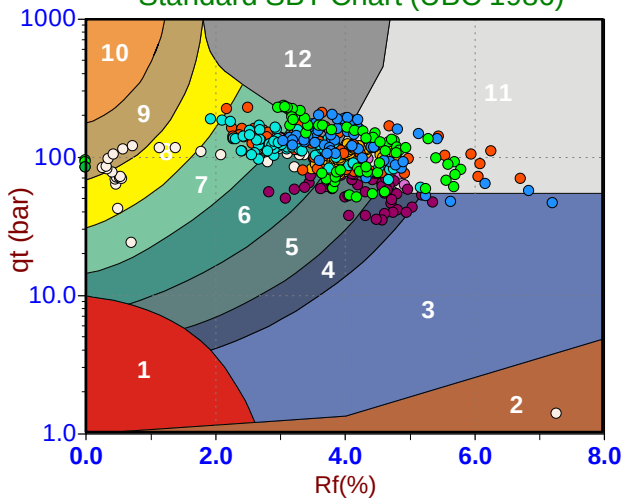

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-24 12:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT137
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

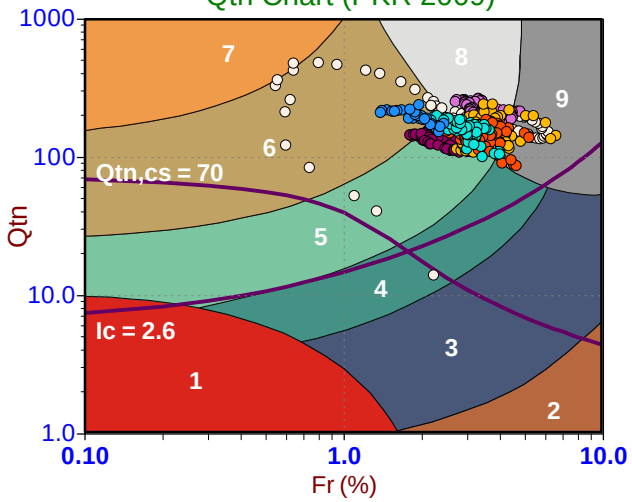

Modified SBTn (PKR 2016)

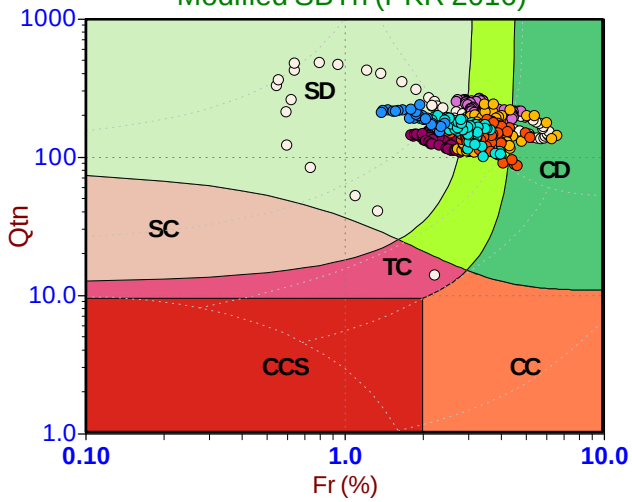

Standard SBT Chart (UBC 1986)

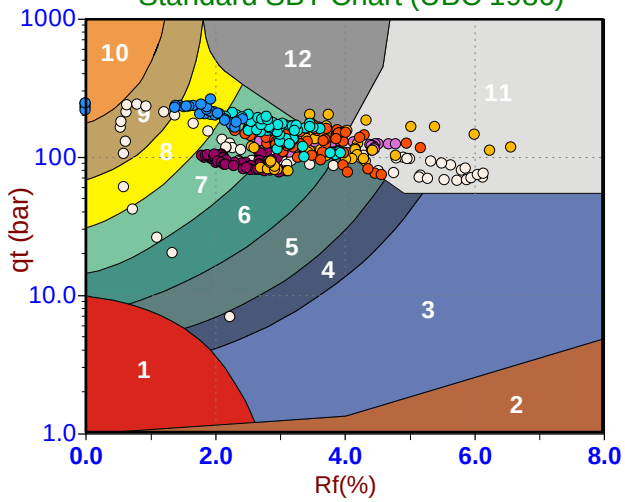

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-24 14:22
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT138
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

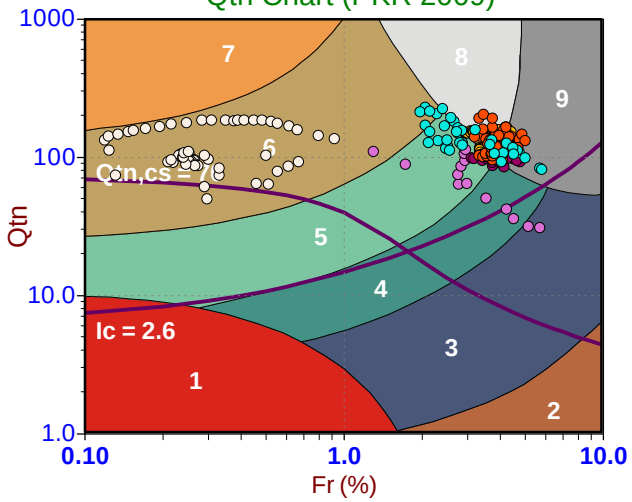

Modified SBTn (PKR 2016)

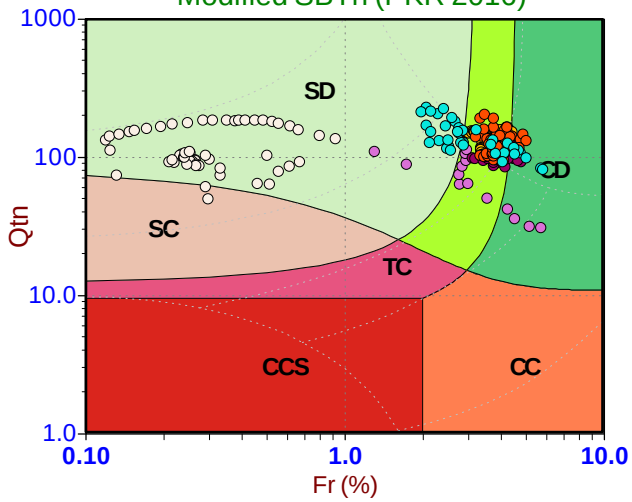

Standard SBT Chart (UBC 1986)

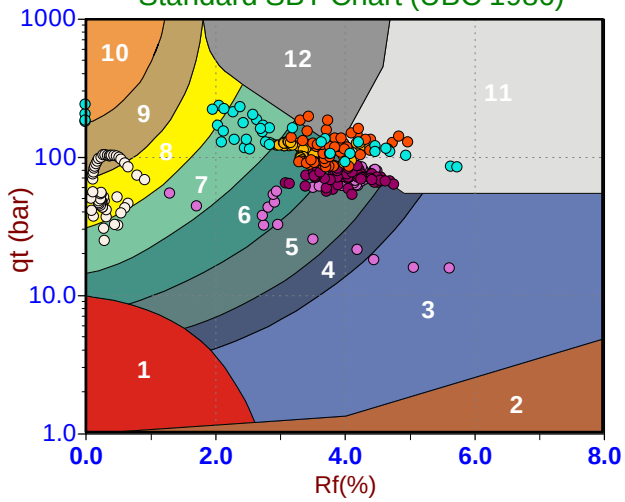

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-24 15:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT139
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

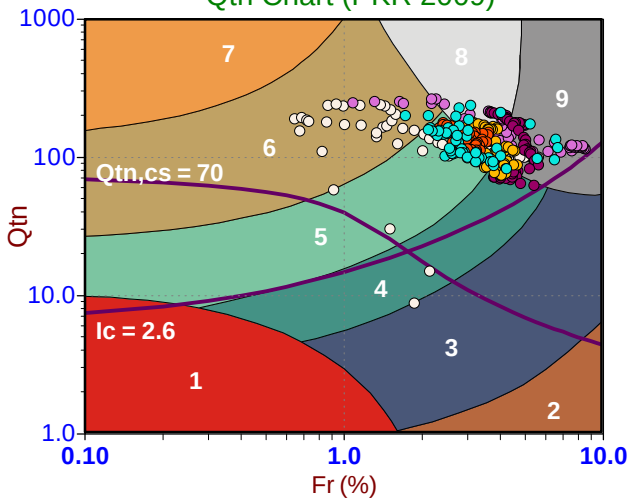

Modified SBTn (PKR 2016)

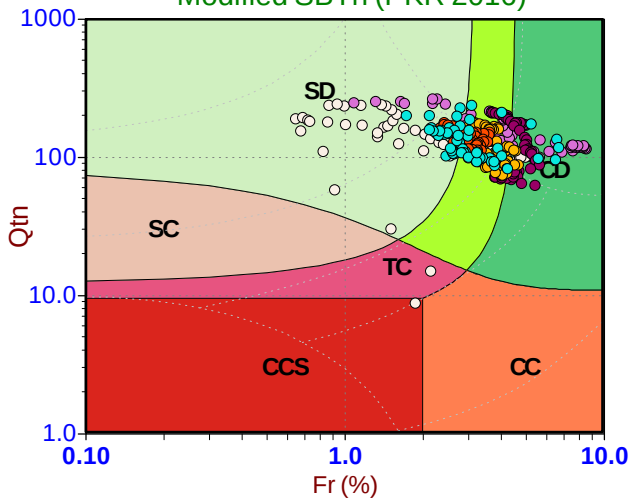

Standard SBT Chart (UBC 1986)

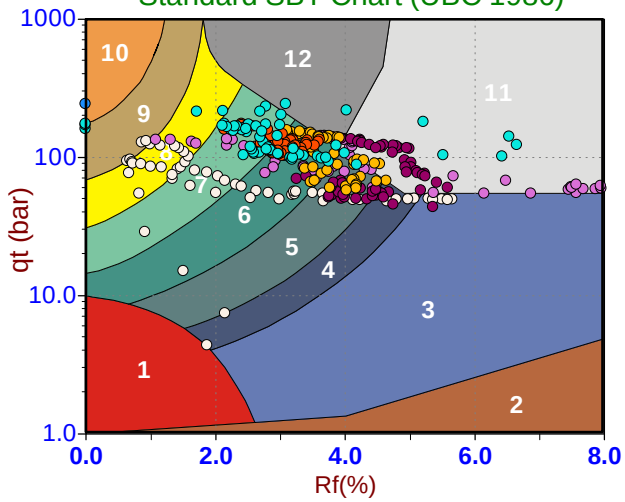

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-24 16:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT140
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

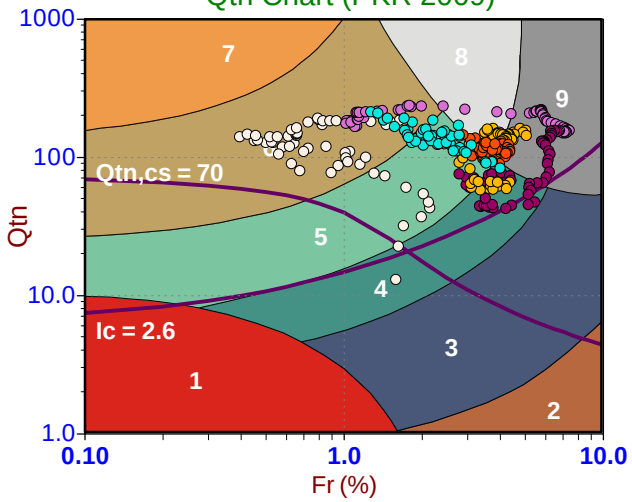

Modified SBTn (PKR 2016)

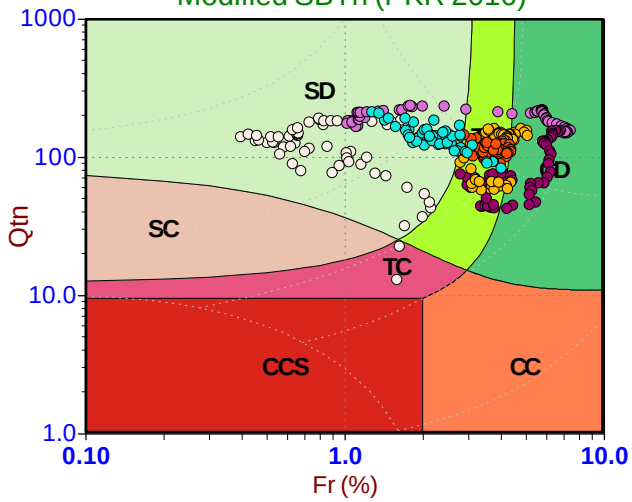

Standard SBT Chart (UBC 1986)

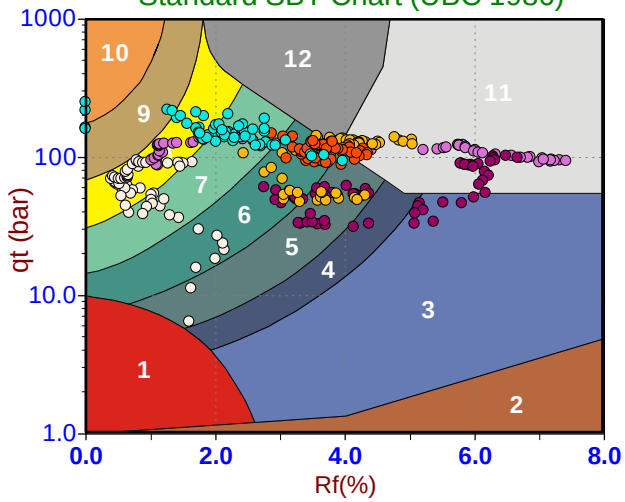

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-25 07:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT141
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

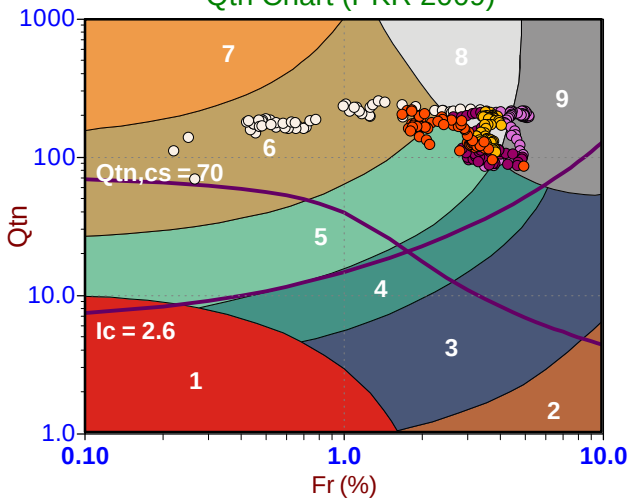

Modified SBTn (PKR 2016)

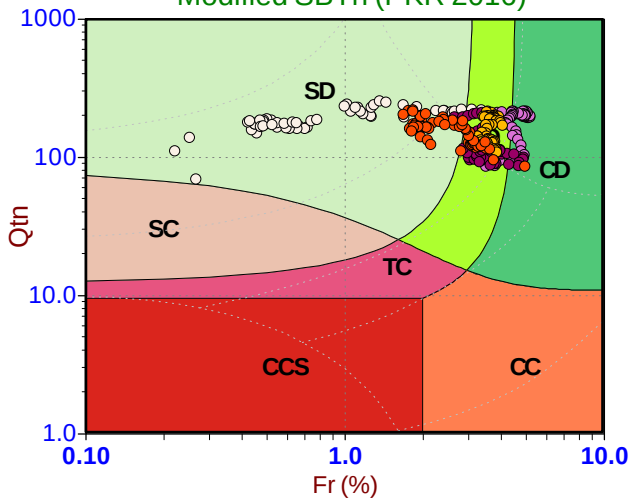

Standard SBT Chart (UBC 1986)

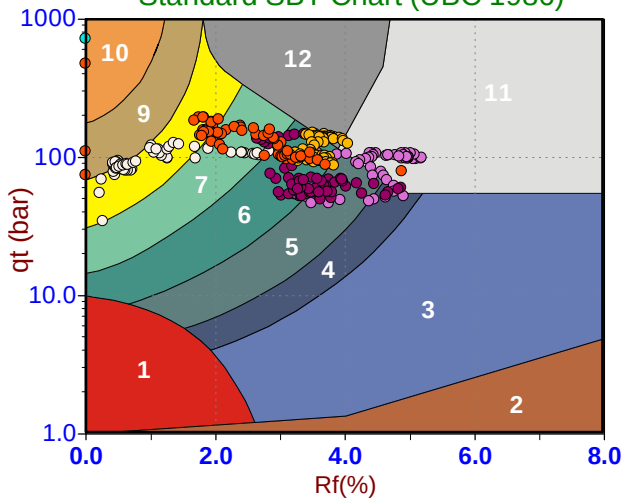

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-25 09:39
Site: Brooks, Alberta

Sounding: RCPT22-22CPT142
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

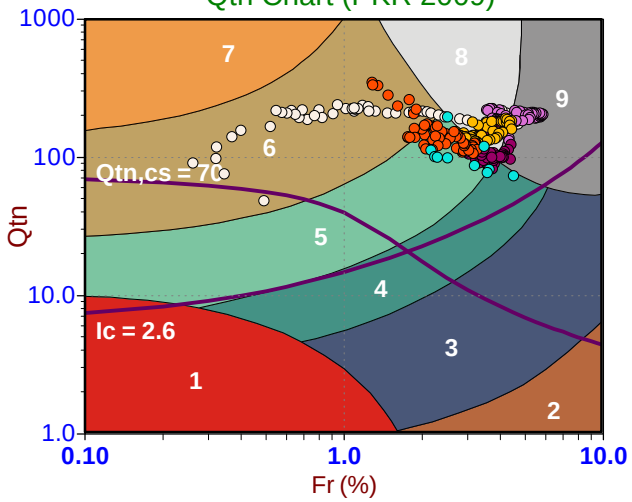

Modified SBTn (PKR 2016)

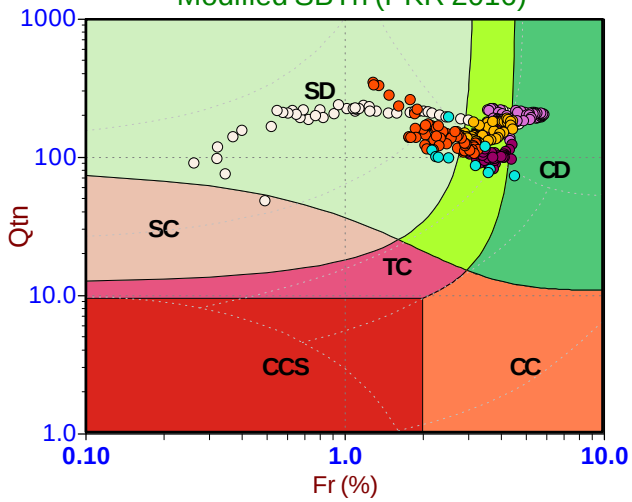

Standard SBT Chart (UBC 1986)

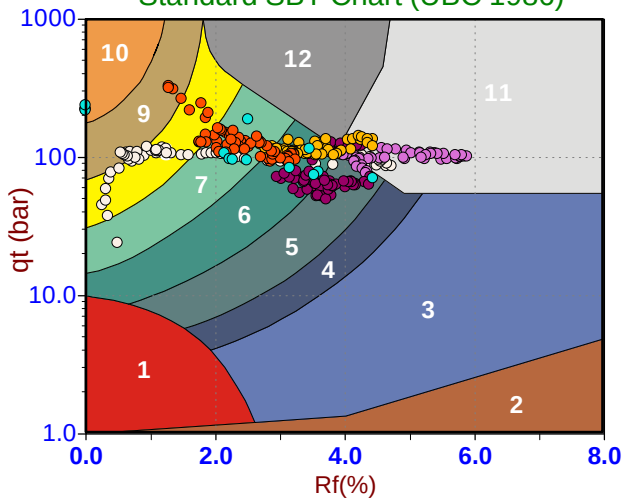

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-25 10:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT143
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

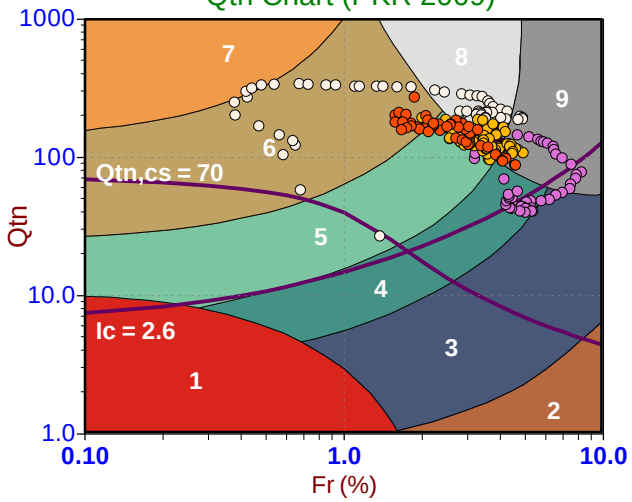

Modified SBTn (PKR 2016)

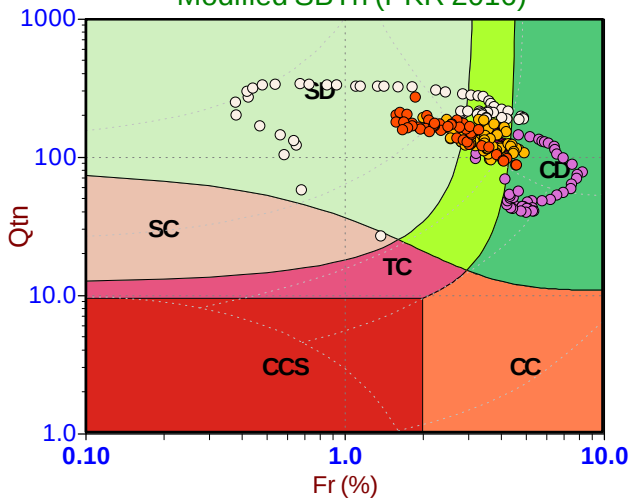

Standard SBT Chart (UBC 1986)

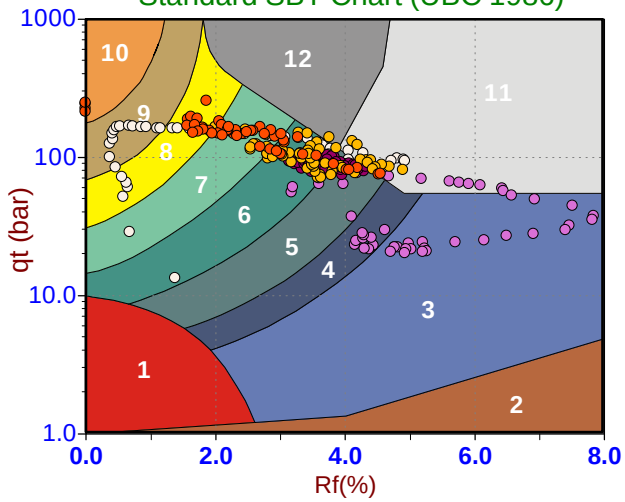

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-25 13:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT145
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

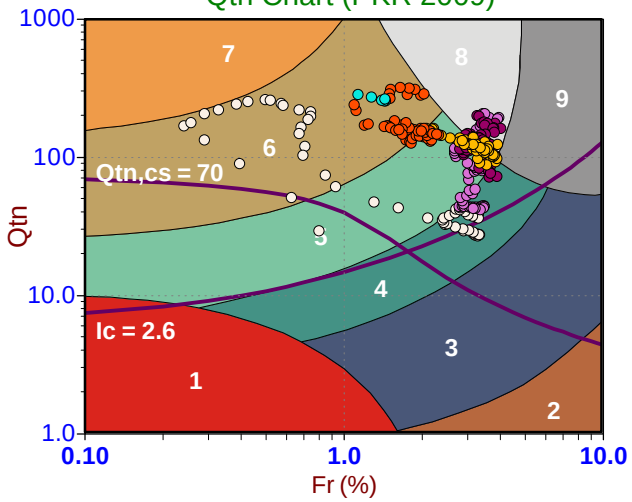

Modified SBTn (PKR 2016)

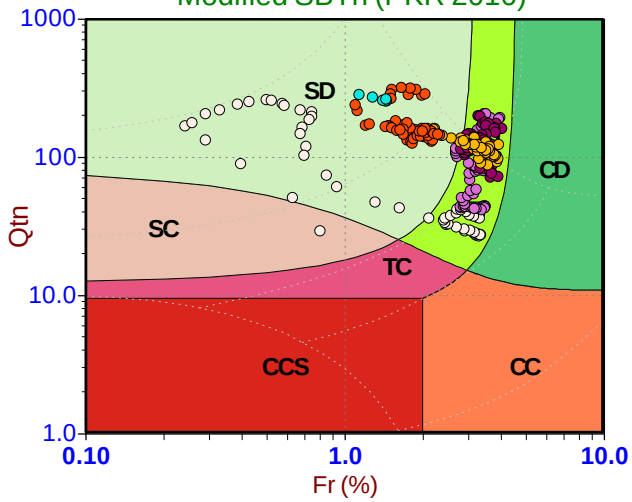

Standard SBT Chart (UBC 1986)

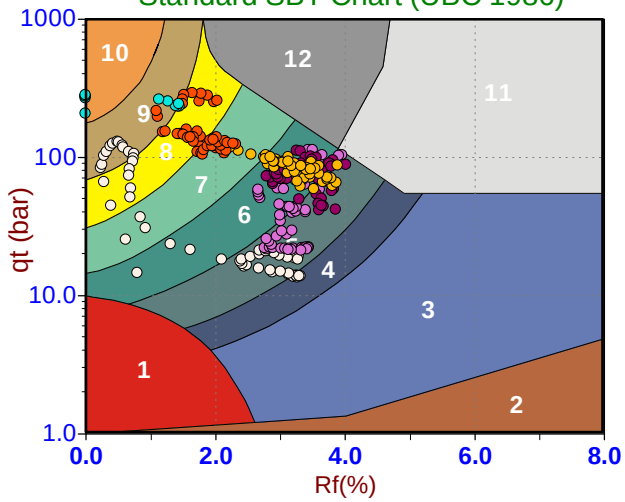

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-25 12:47
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT144
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

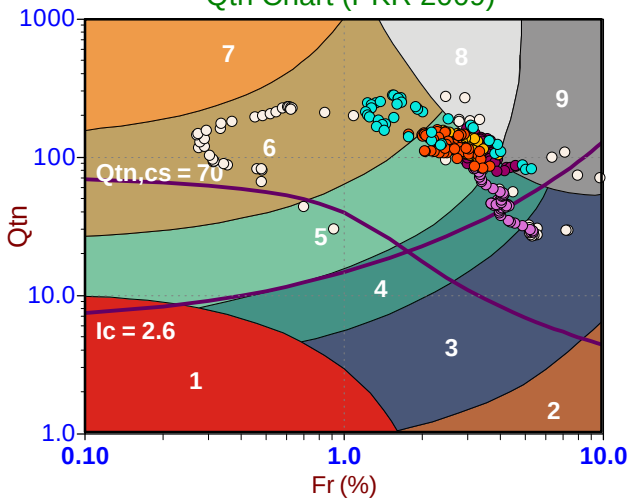

Modified SBTn (PKR 2016)

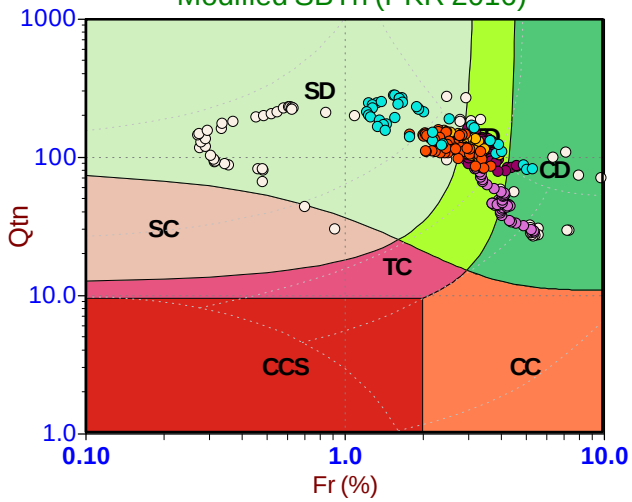

Standard SBT Chart (UBC 1986)

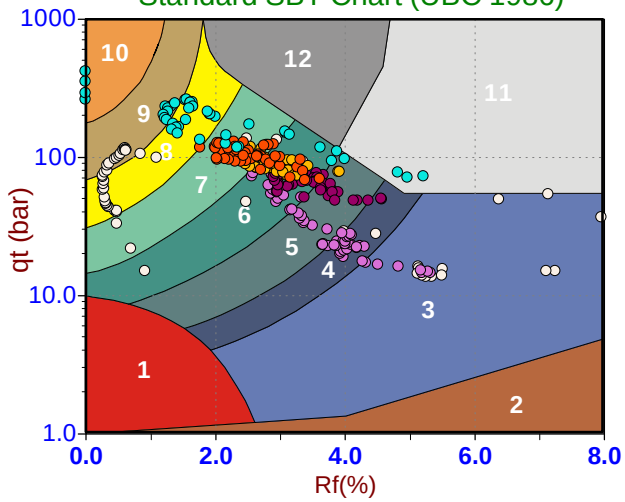

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-20 07:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT146
Cone: 651:T1500F15U35


Qtn Chart (PKR 2009)

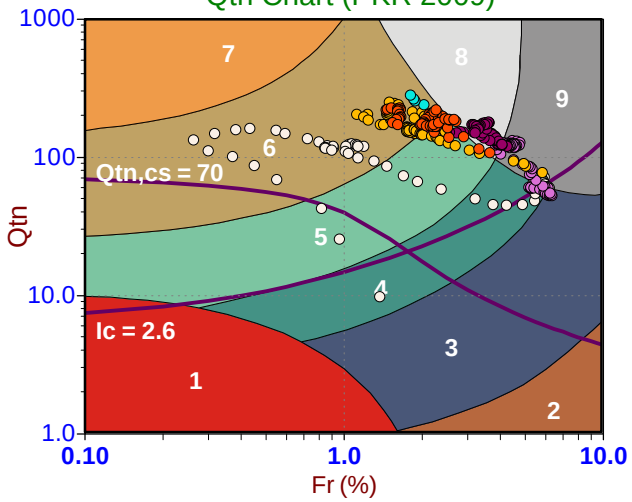

Modified SBTn (PKR 2016)

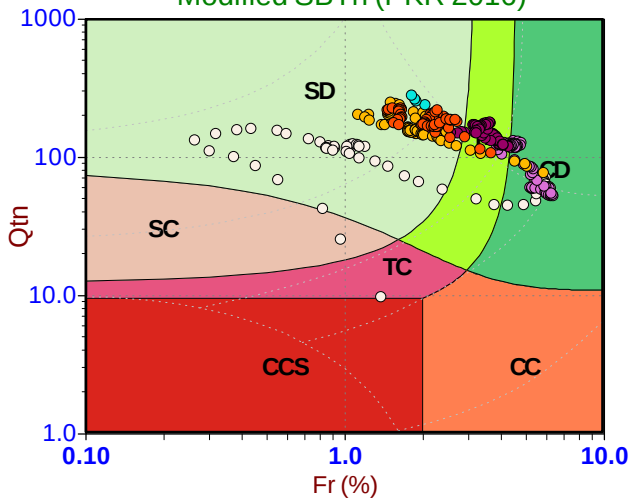

Standard SBT Chart (UBC 1986)

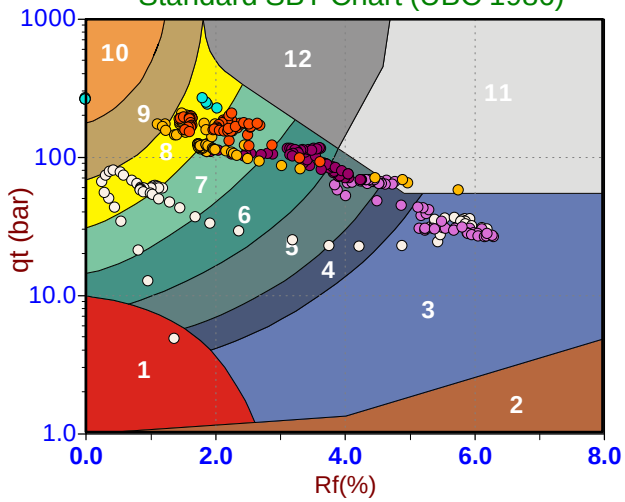

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-20 10:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT147
Cone: 651:T1500F15U35


Qtn Chart (PKR 2009)

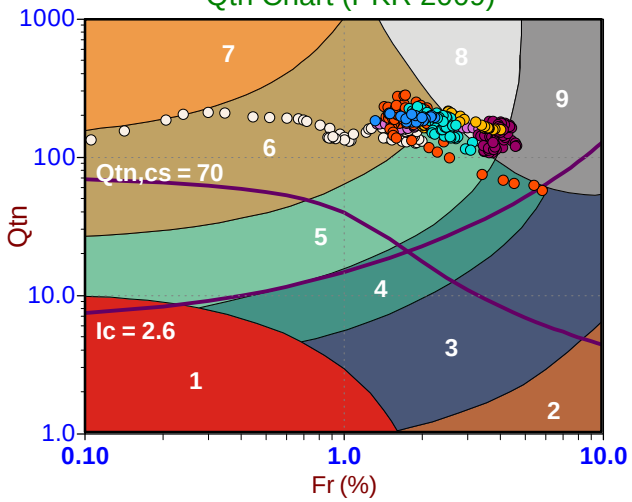

Modified SBTn (PKR 2016)

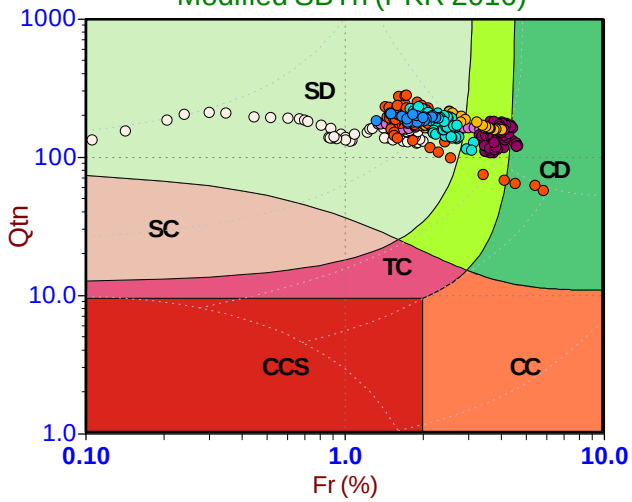

Standard SBT Chart (UBC 1986)

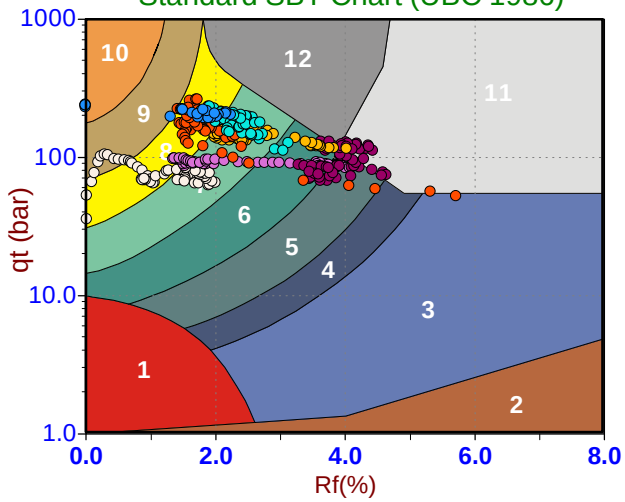

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-20 15:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT148
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

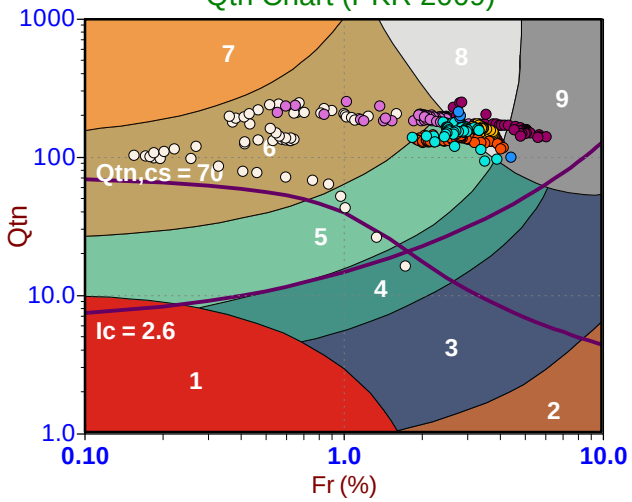

Modified SBTn (PKR 2016)

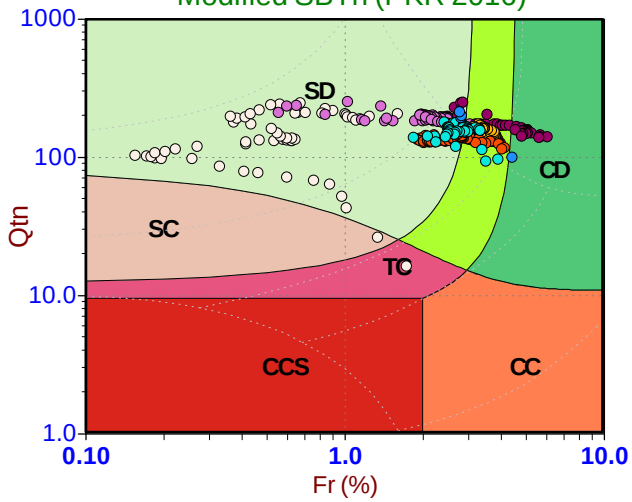

Standard SBT Chart (UBC 1986)

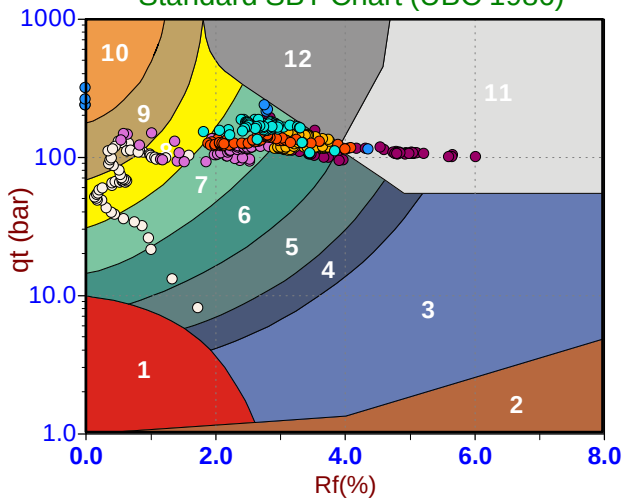

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-22 09:48
Site: Brooks, Alberta

Sounding: RCPT22-22CPT149
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

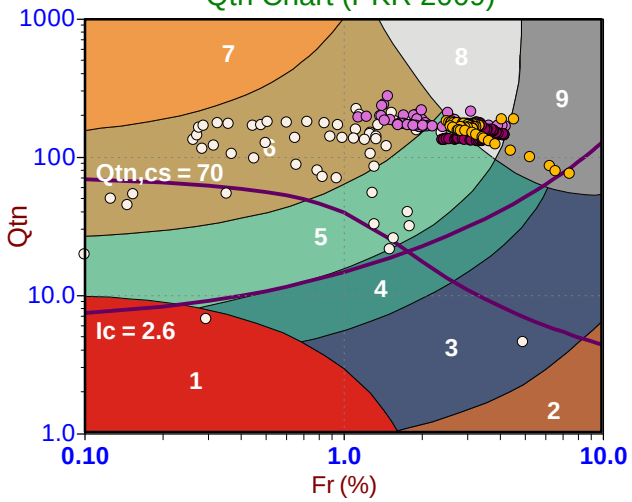

Modified SBTn (PKR 2016)

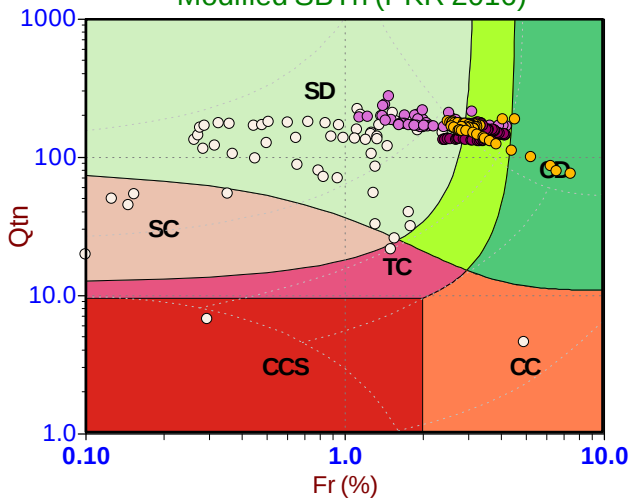

Standard SBT Chart (UBC 1986)

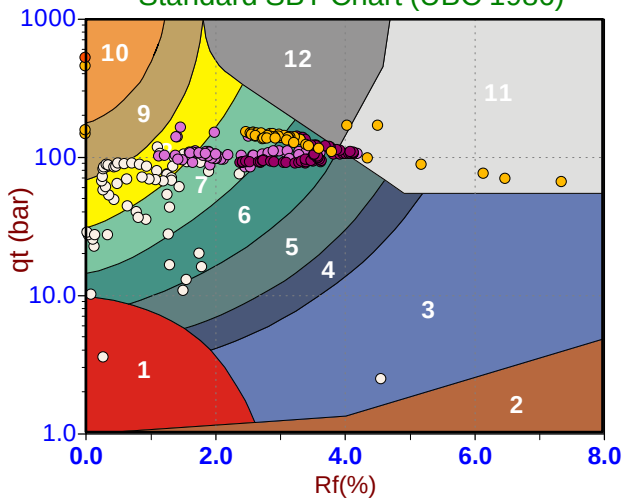

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-22 07:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT150
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

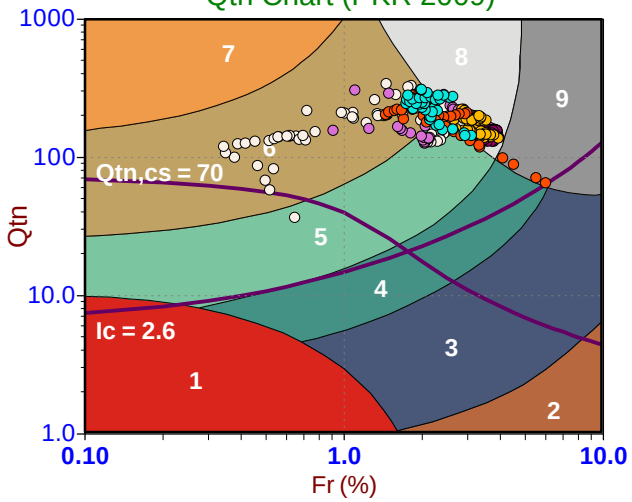

Modified SBTn (PKR 2016)

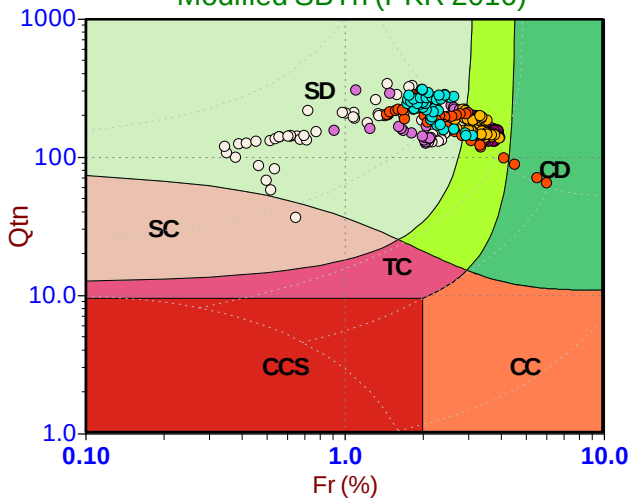

Standard SBT Chart (UBC 1986)

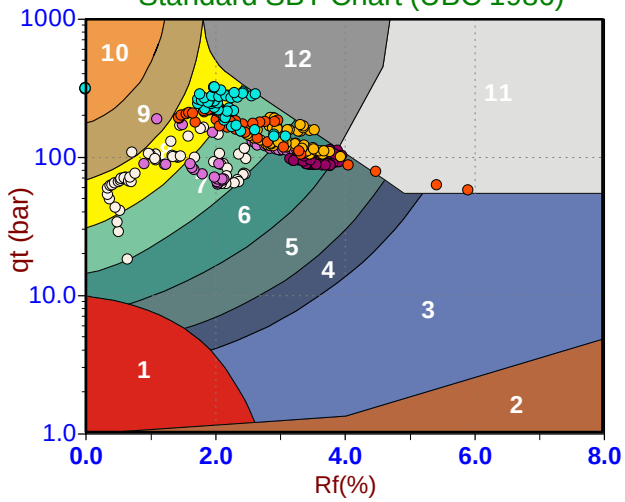

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-21 15:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT151
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

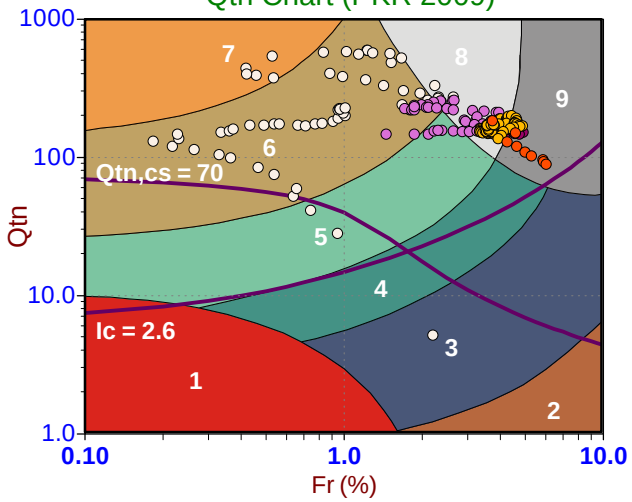

Modified SBTn (PKR 2016)

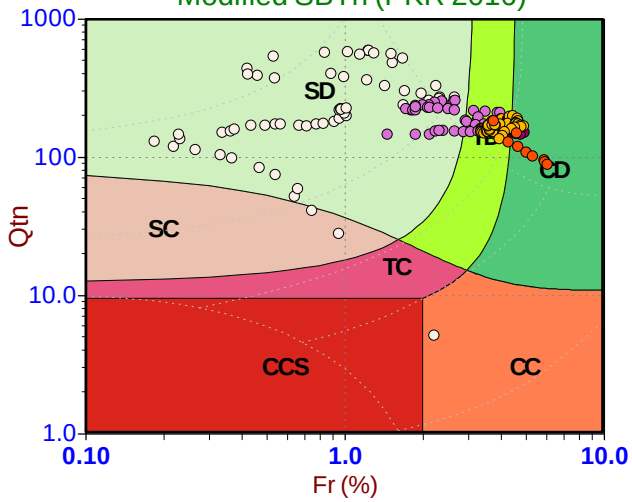

Standard SBT Chart (UBC 1986)

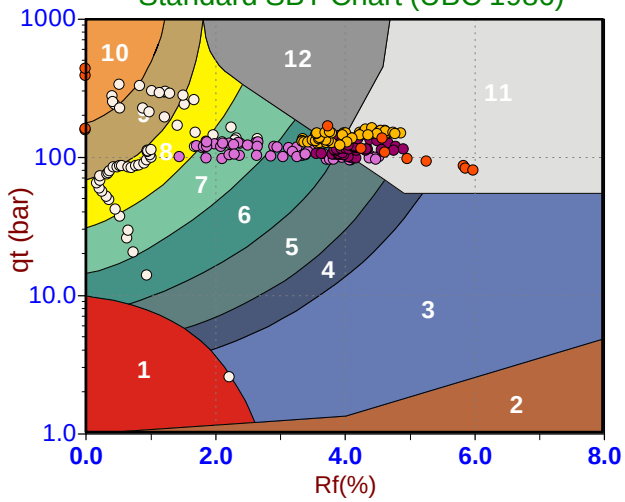

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-21 13:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT152
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

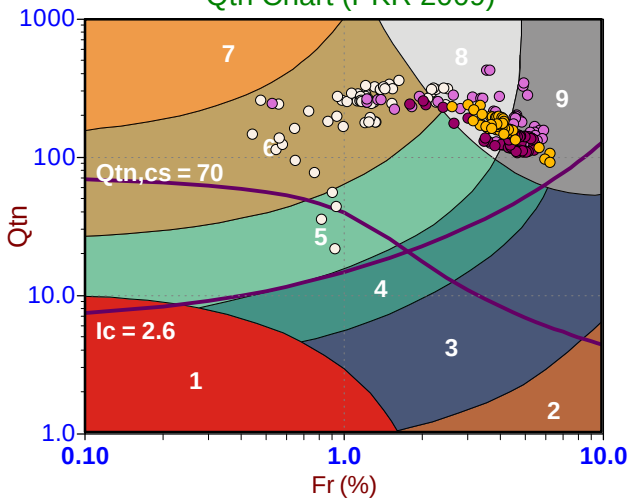

Modified SBTn (PKR 2016)

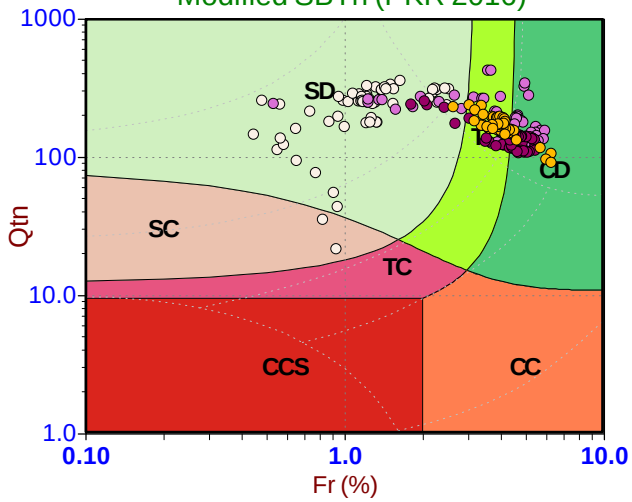

Standard SBT Chart (UBC 1986)

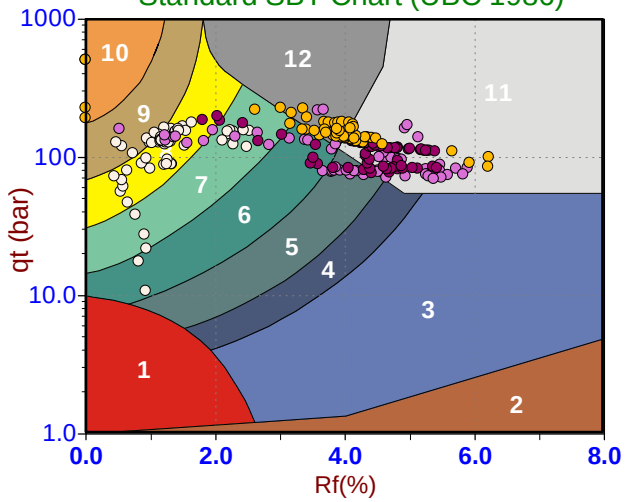

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-21 10:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT153A
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

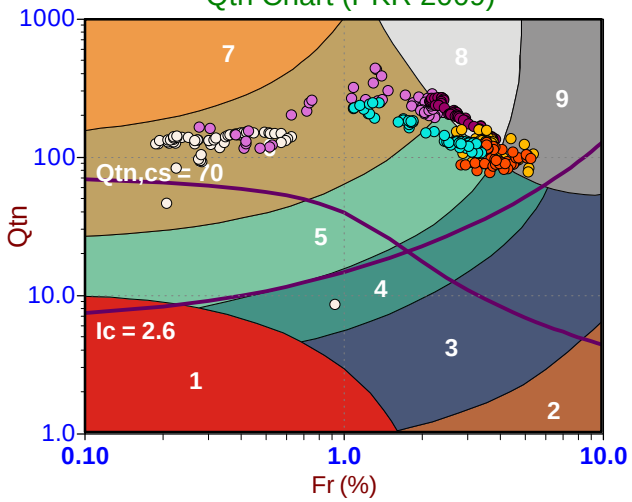

Modified SBTn (PKR 2016)

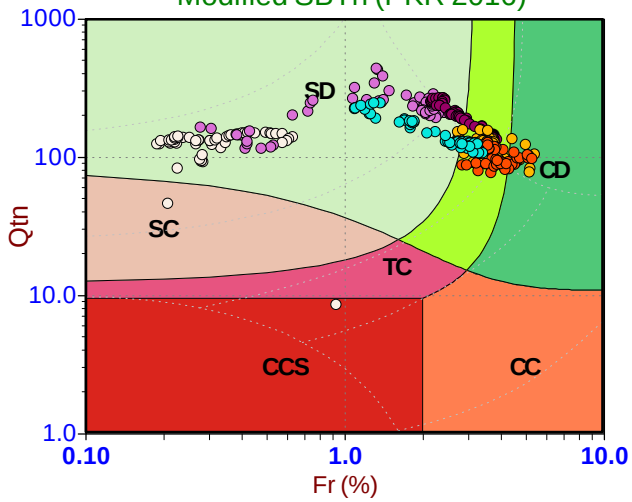

Standard SBT Chart (UBC 1986)

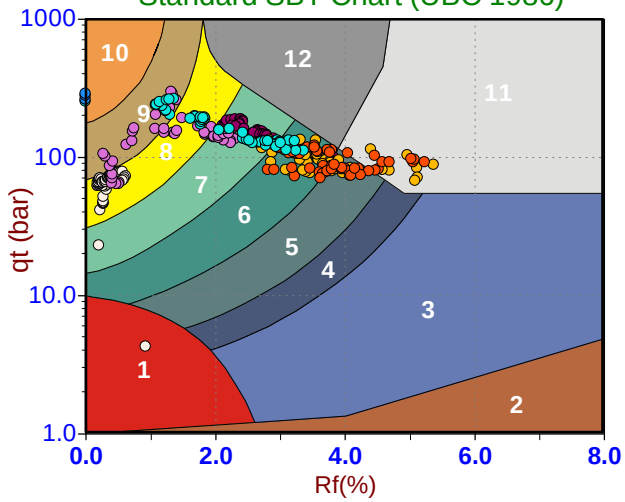

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-21 10:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT153
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

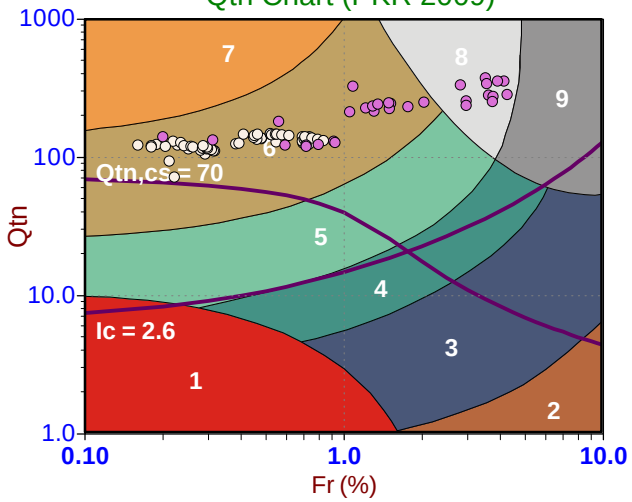

Modified SBTn (PKR 2016)

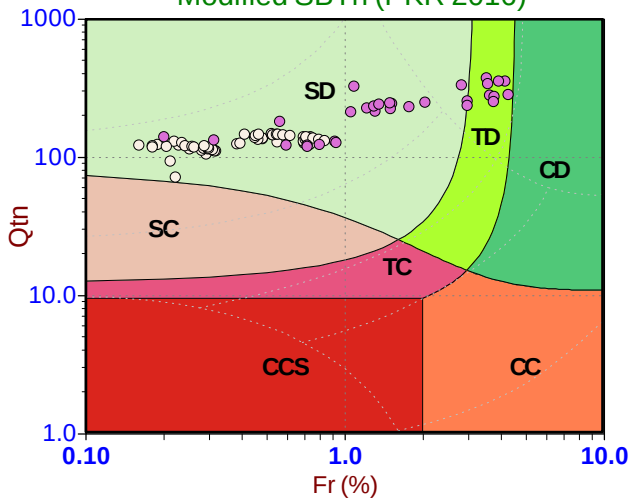

Standard SBT Chart (UBC 1986)

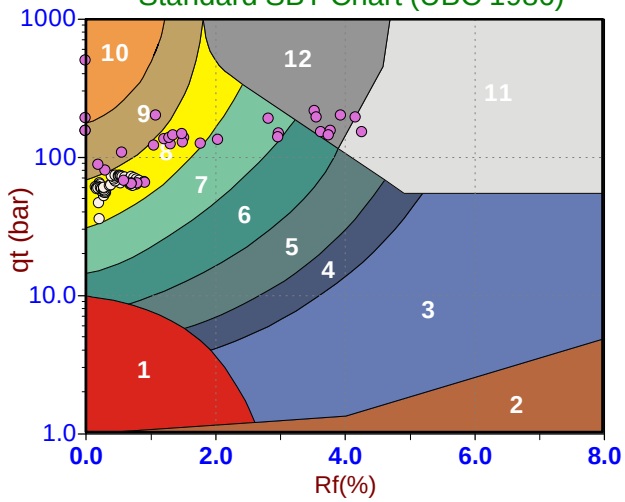

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-21 07:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT154
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

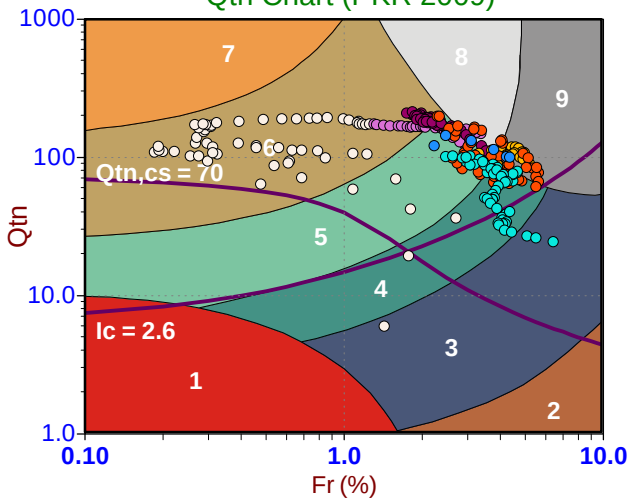

Modified SBTn (PKR 2016)

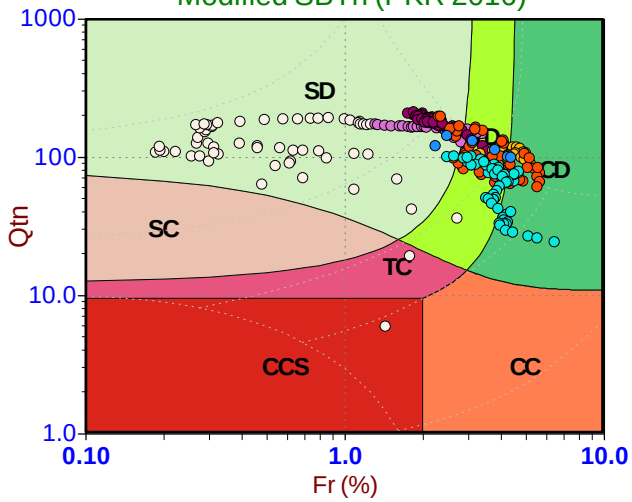

Standard SBT Chart (UBC 1986)

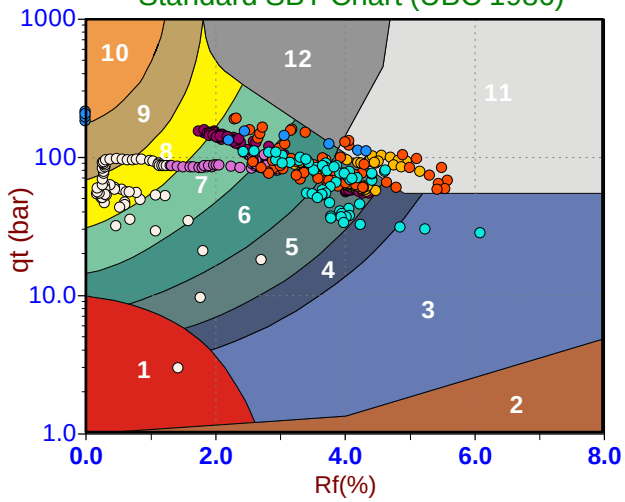

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-22 12:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT155
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

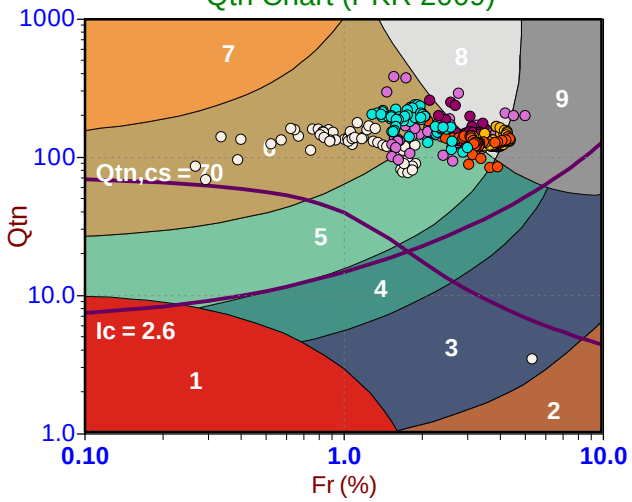

Modified SBTn (PKR 2016)

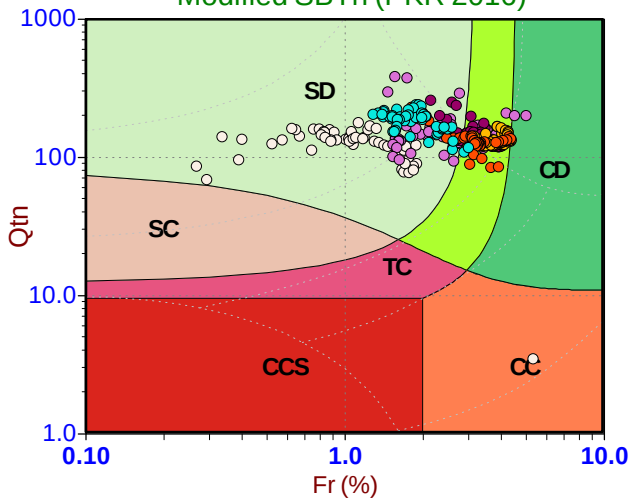

Standard SBT Chart (UBC 1986)

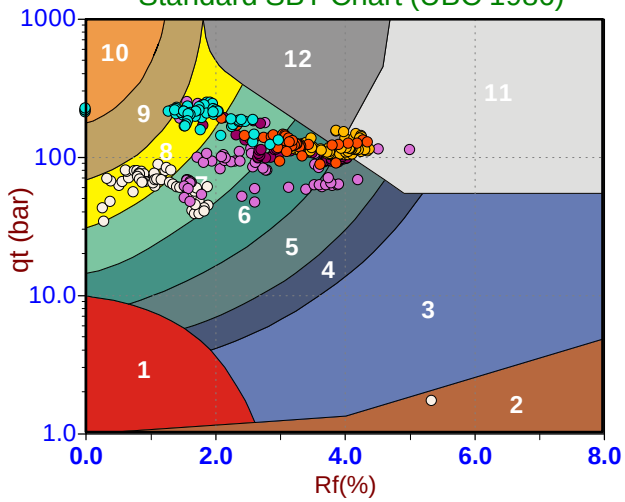

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-22 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT156
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

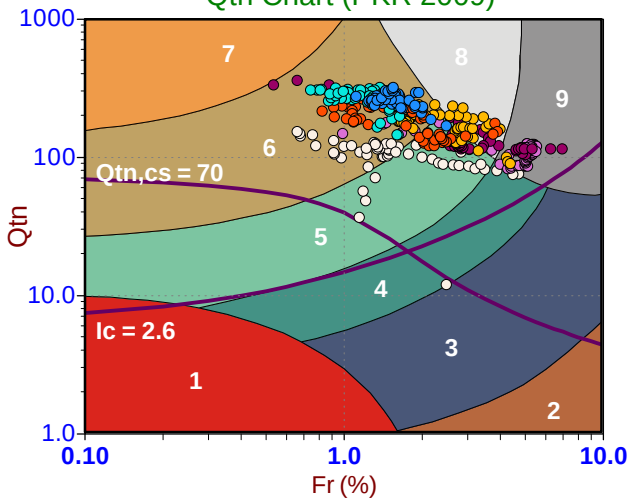

Modified SBTn (PKR 2016)

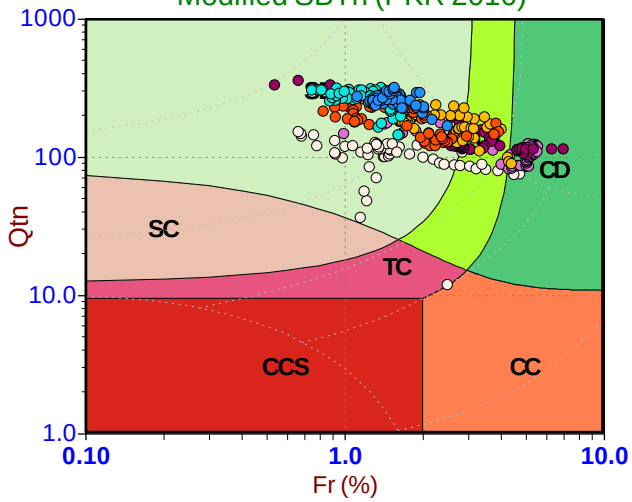

Standard SBT Chart (UBC 1986)

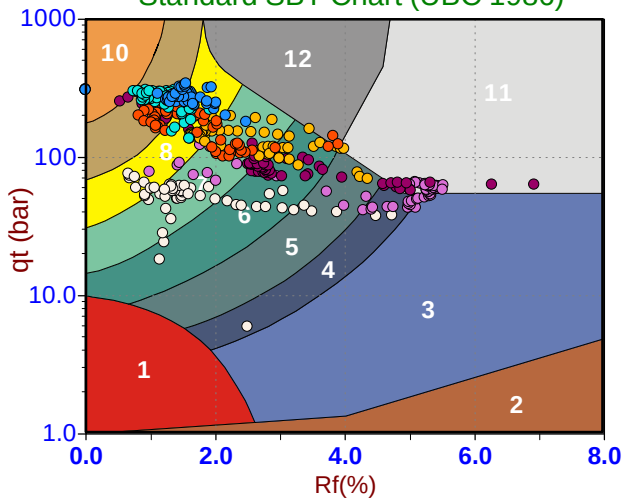

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-22 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT157
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

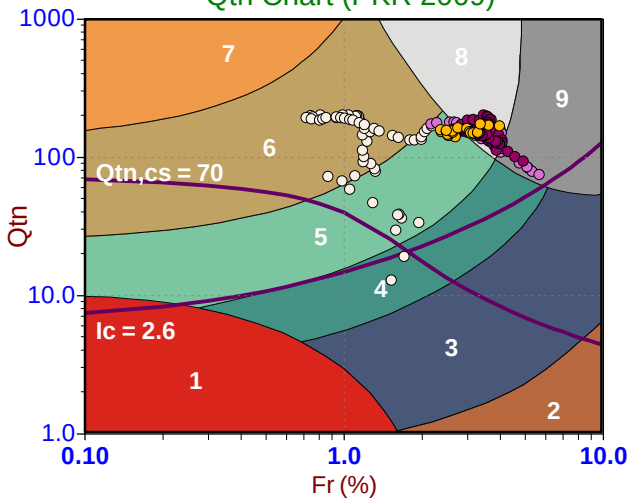

Modified SBTn (PKR 2016)

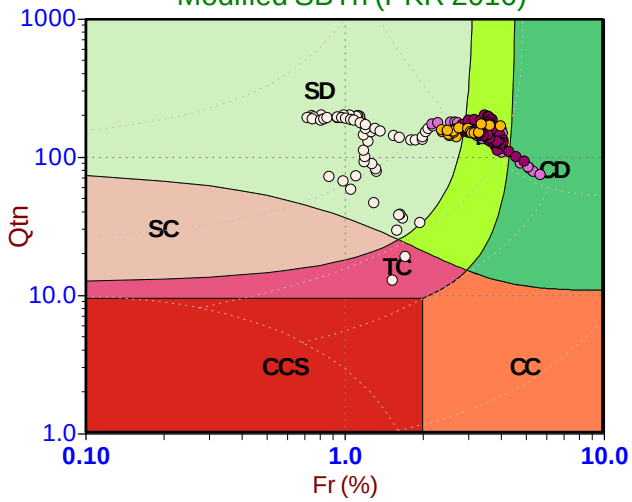

Standard SBT Chart (UBC 1986)

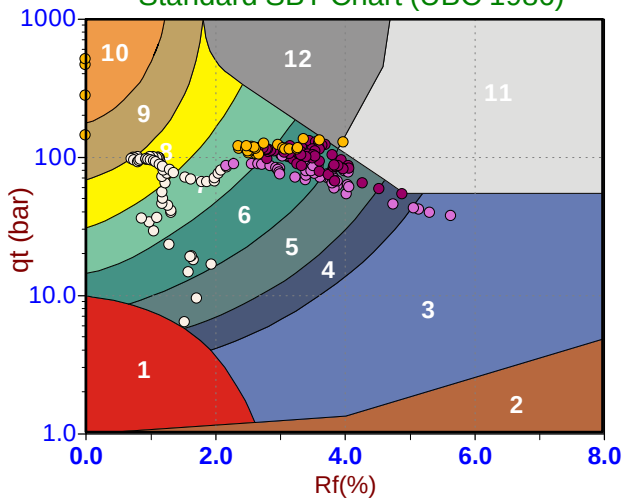

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-22 15:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT158
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

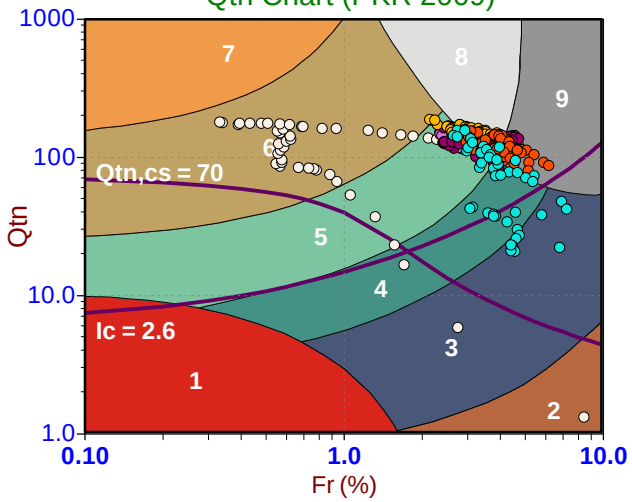

Modified SBTn (PKR 2016)

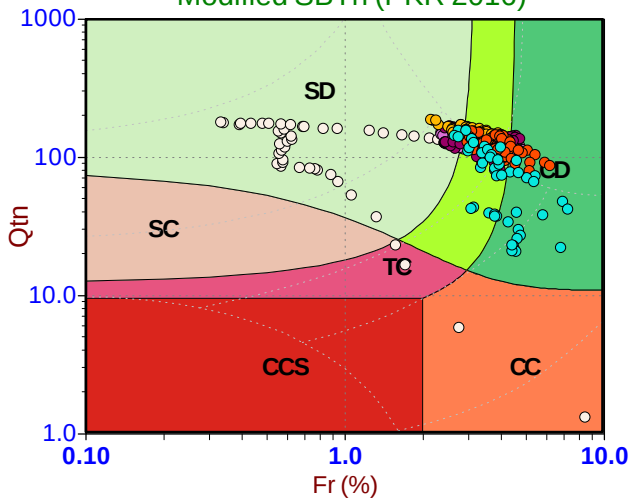

Standard SBT Chart (UBC 1986)

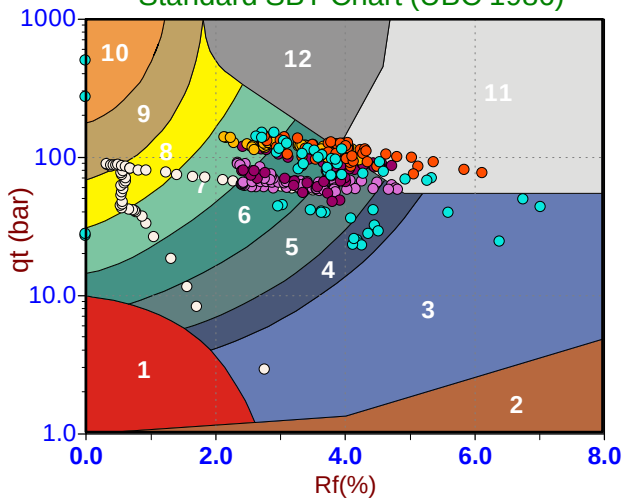

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-14 12:12
Site: Brooks, Alberta

Sounding: RCPT22-22CPT160
Cone: 822:T1000F10U35


Qtn Chart (PKR 2009)

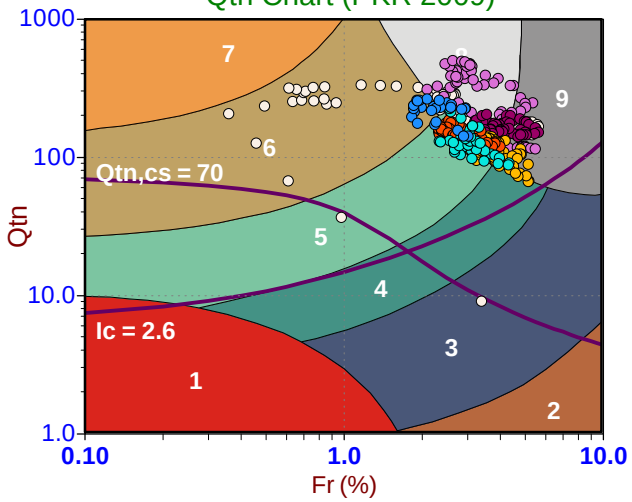

Modified SBTn (PKR 2016)

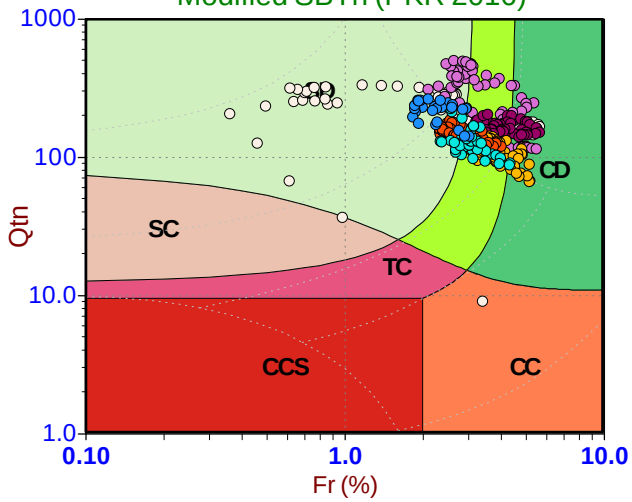

Standard SBT Chart (UBC 1986)

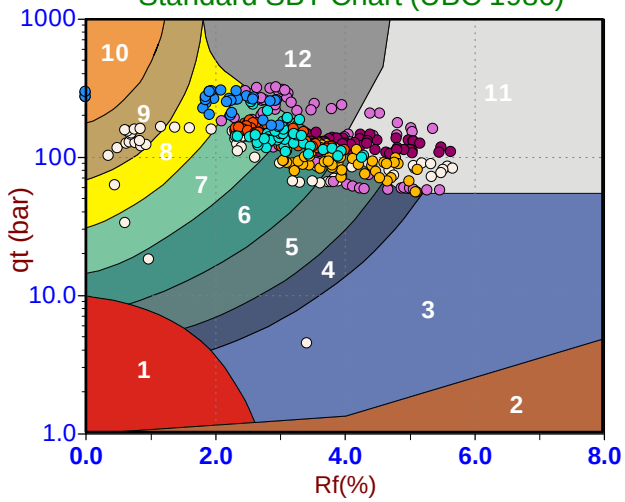

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 13:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

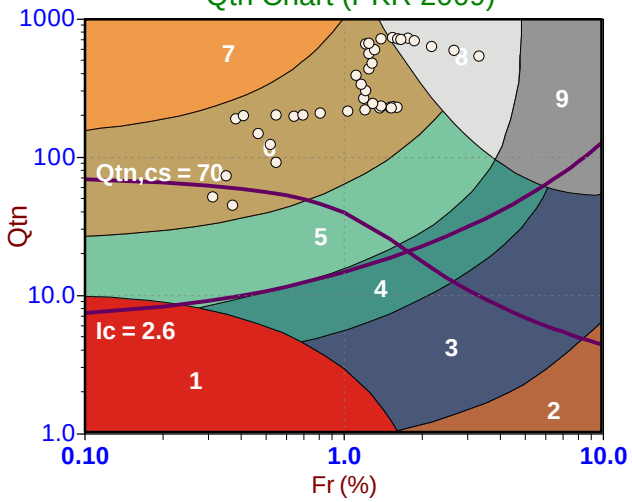

Modified SBTn (PKR 2016)

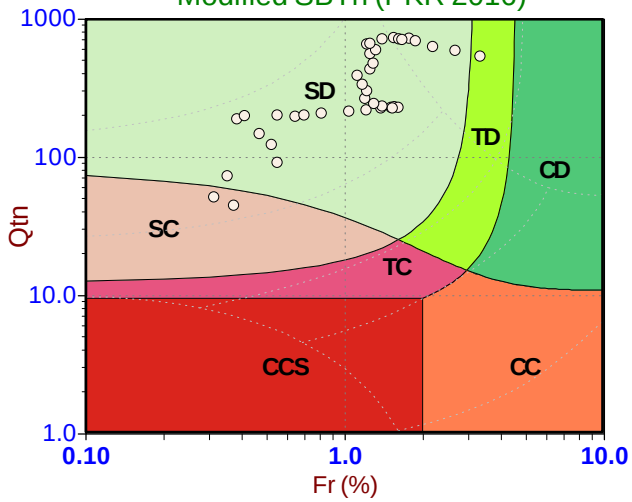

Standard SBT Chart (UBC 1986)

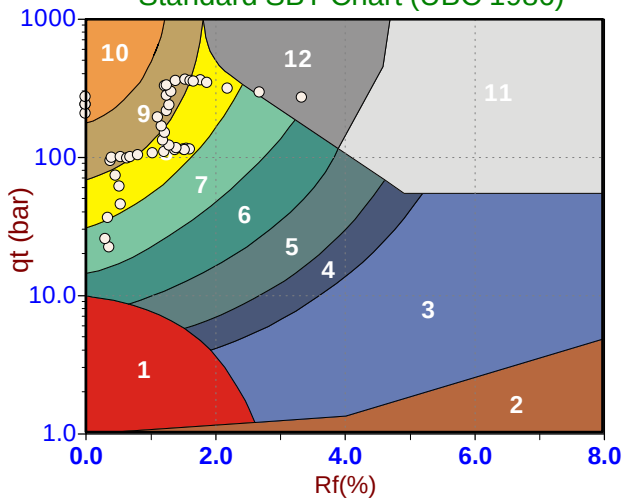

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 13:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161A
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

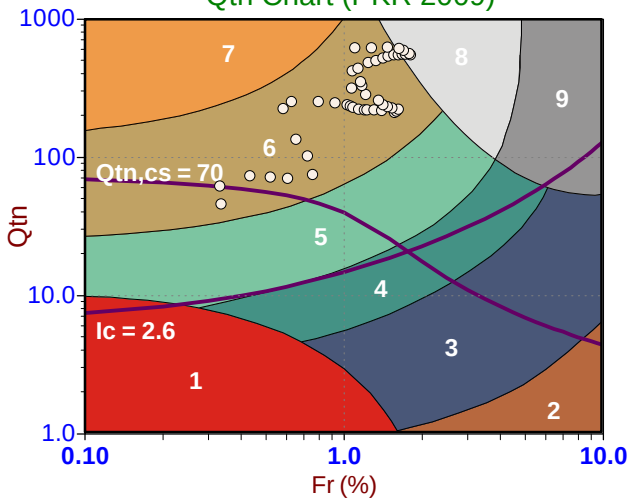

Modified SBTn (PKR 2016)

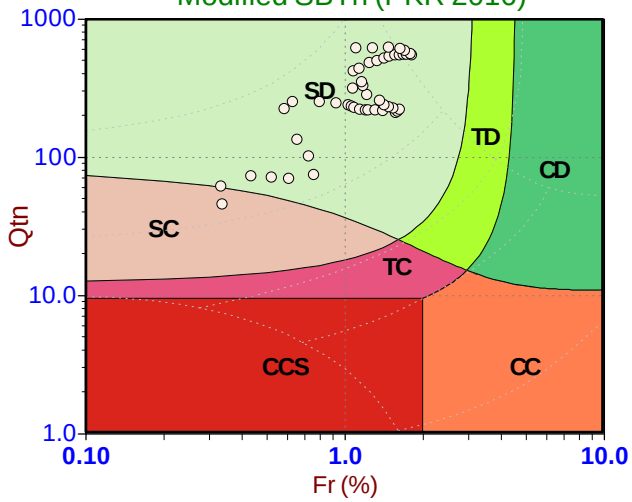

Standard SBT Chart (UBC 1986)

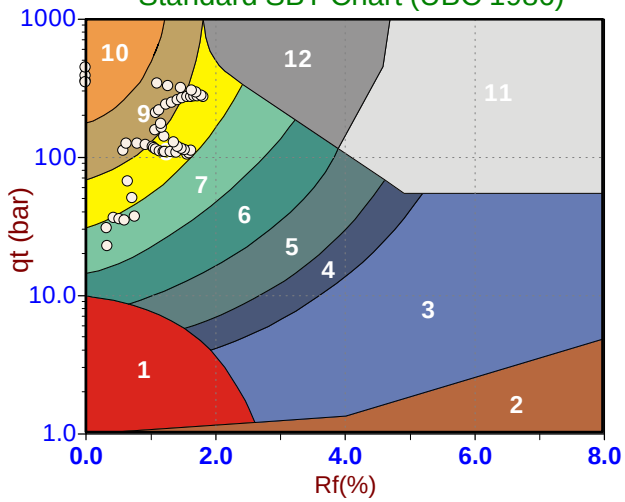

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 14:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161B
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

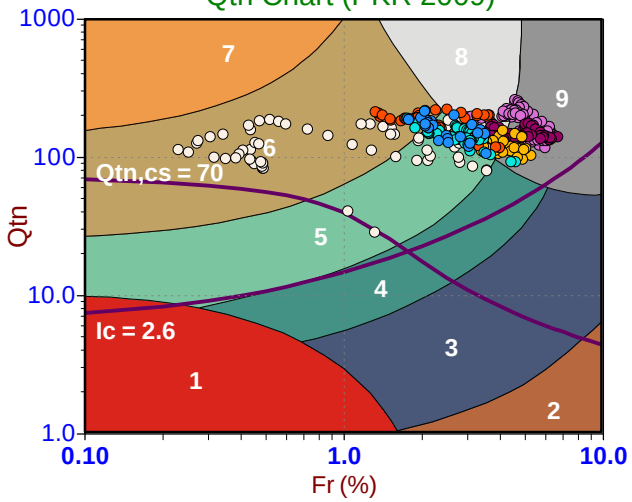

Modified SBTn (PKR 2016)

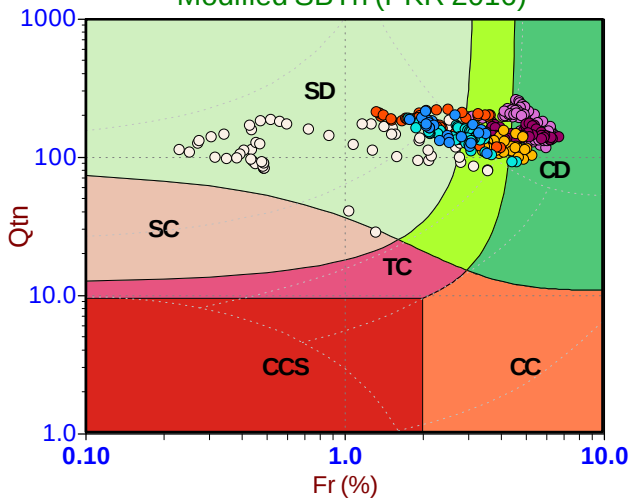

Standard SBT Chart (UBC 1986)

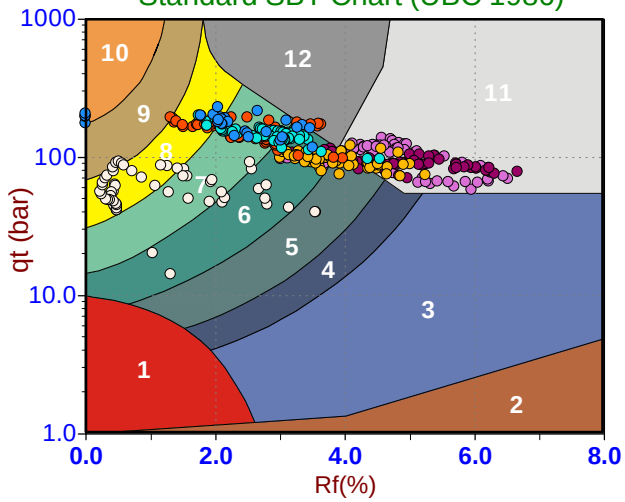

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 10:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT162
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

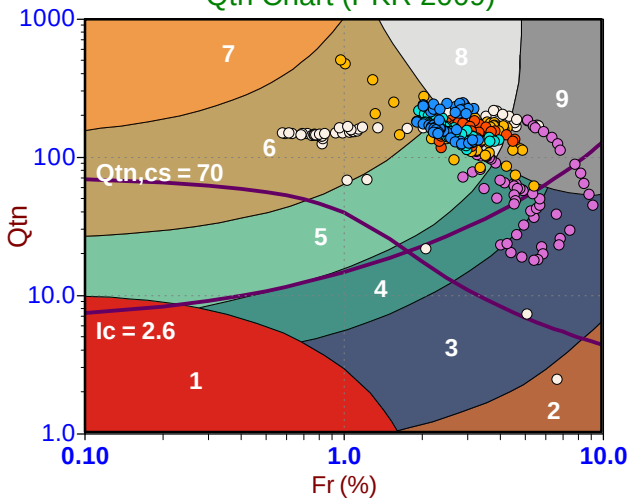

Modified SBTn (PKR 2016)

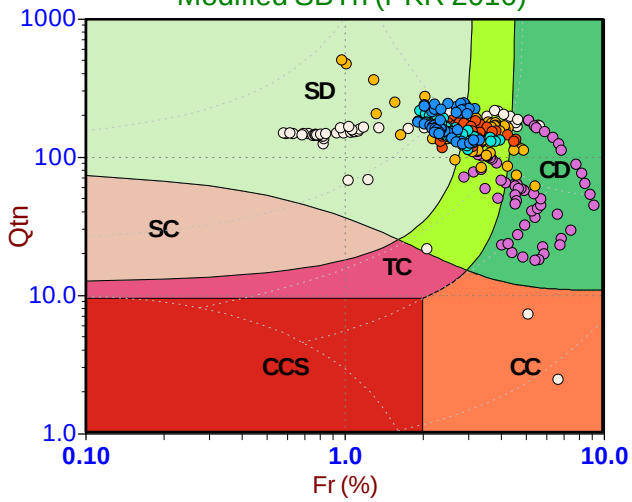

Standard SBT Chart (UBC 1986)

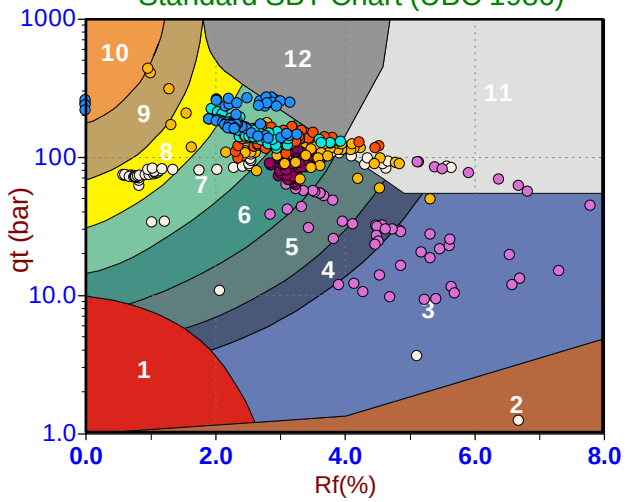

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-14 06:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT163
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

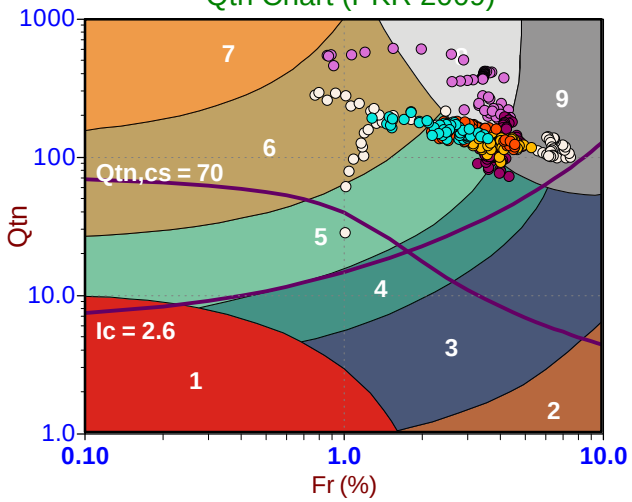

Modified SBTn (PKR 2016)

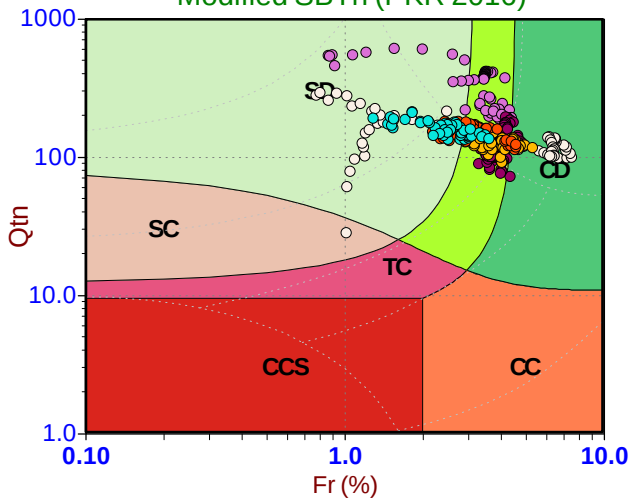

Standard SBT Chart (UBC 1986)

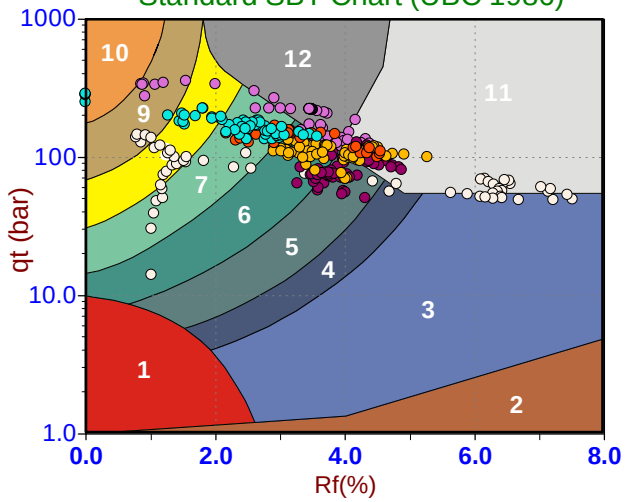

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-23 15:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT164
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

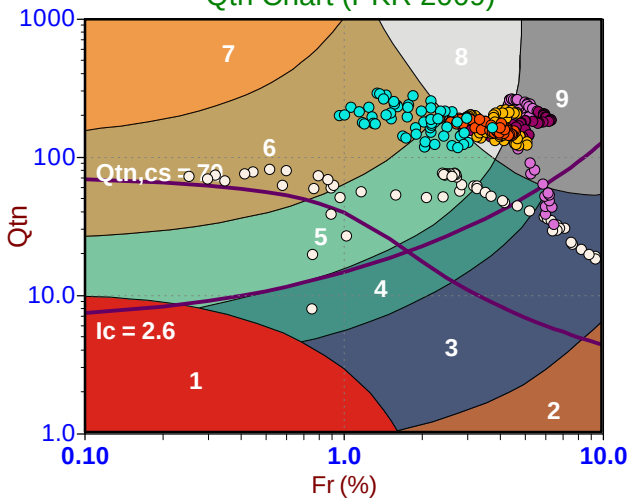

Modified SBTn (PKR 2016)

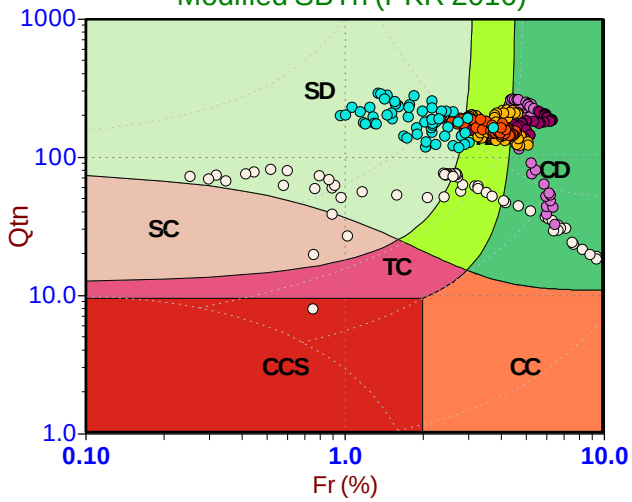

Standard SBT Chart (UBC 1986)

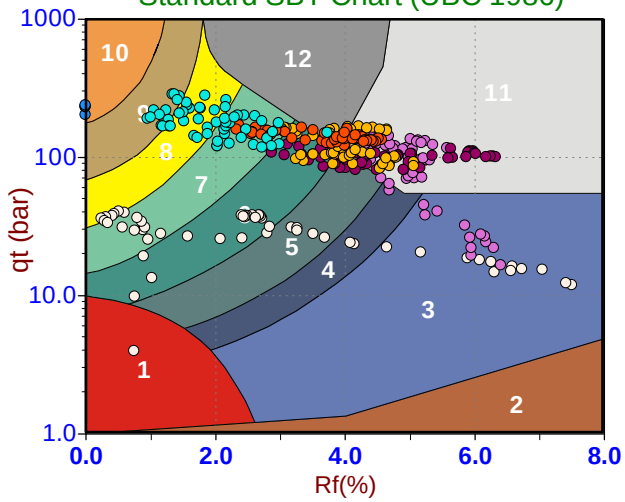

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-13 15:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT165
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

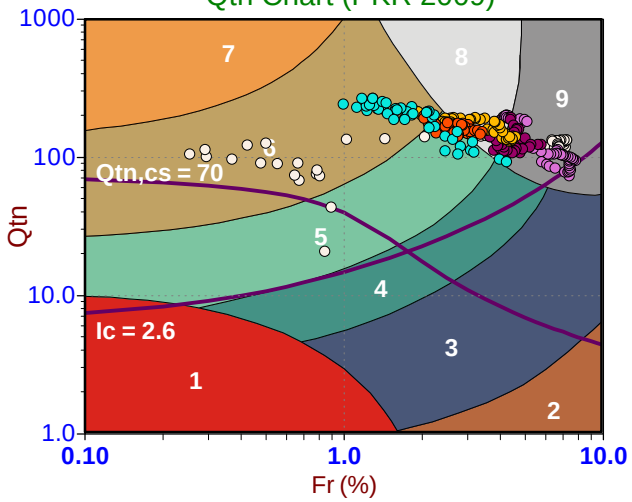

Modified SBTn (PKR 2016)

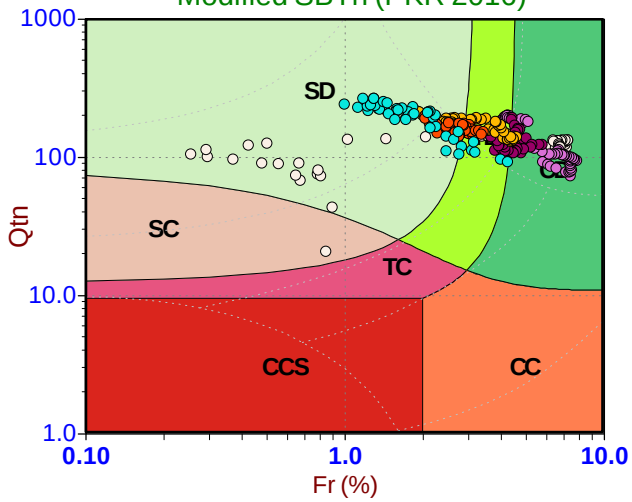

Standard SBT Chart (UBC 1986)

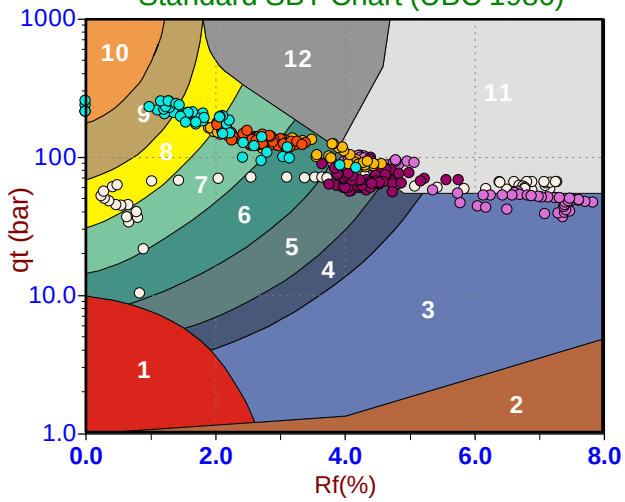

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-24 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT166
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

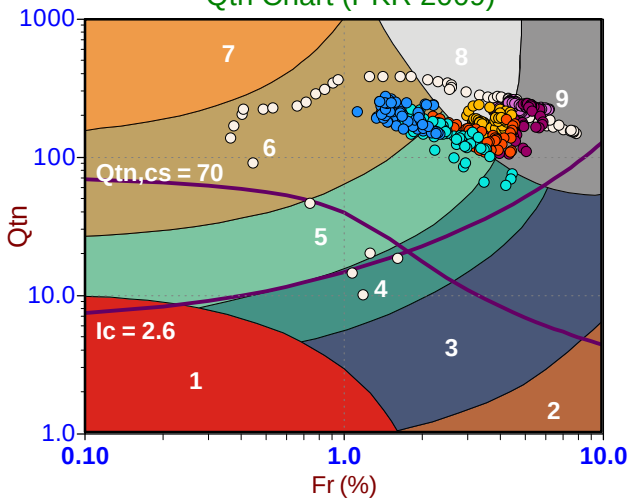

Modified SBTn (PKR 2016)

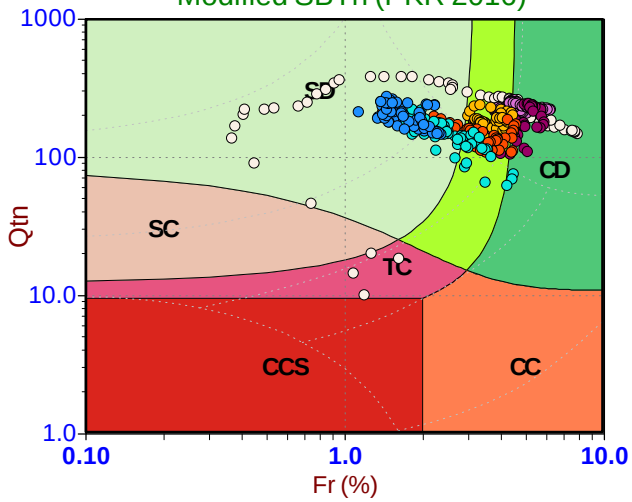

Standard SBT Chart (UBC 1986)

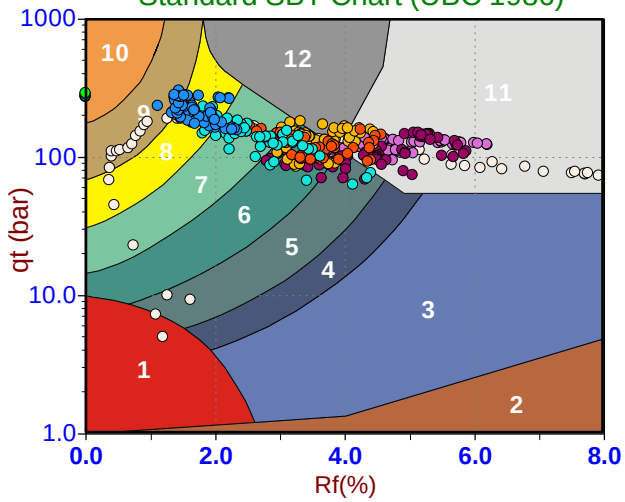

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-24 13:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT167
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

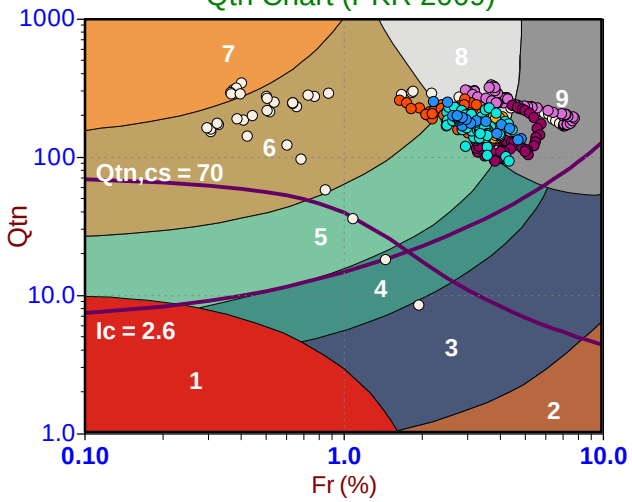

Modified SBTn (PKR 2016)

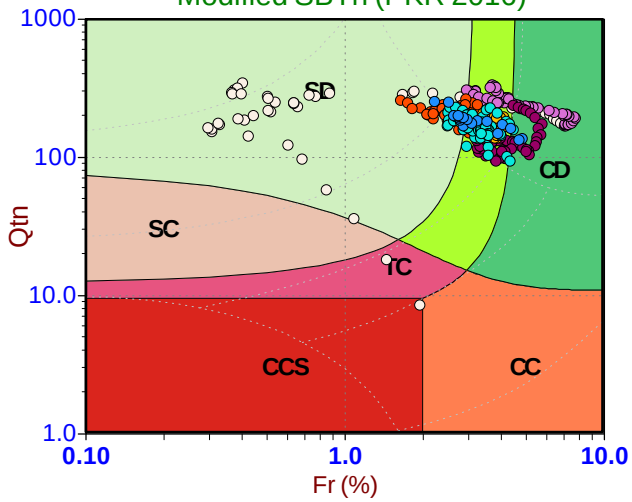

Standard SBT Chart (UBC 1986)

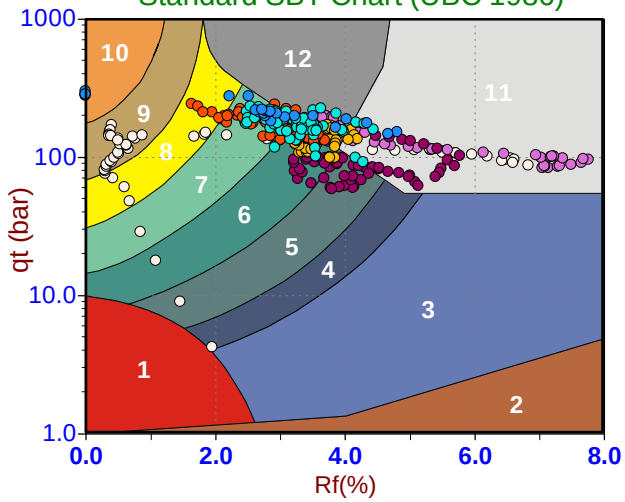

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-24 15:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT168
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

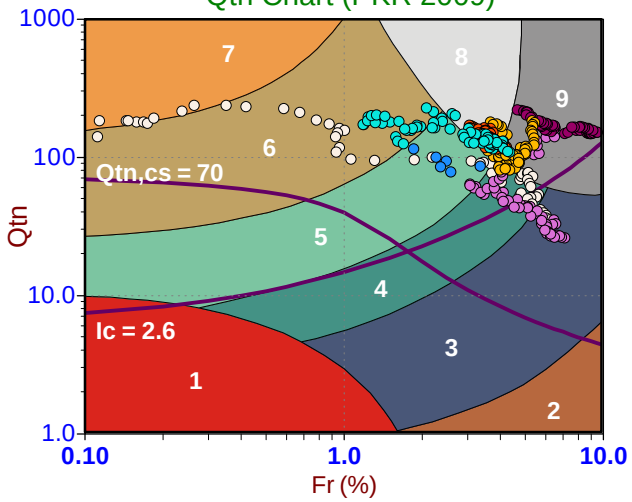

Modified SBTn (PKR 2016)

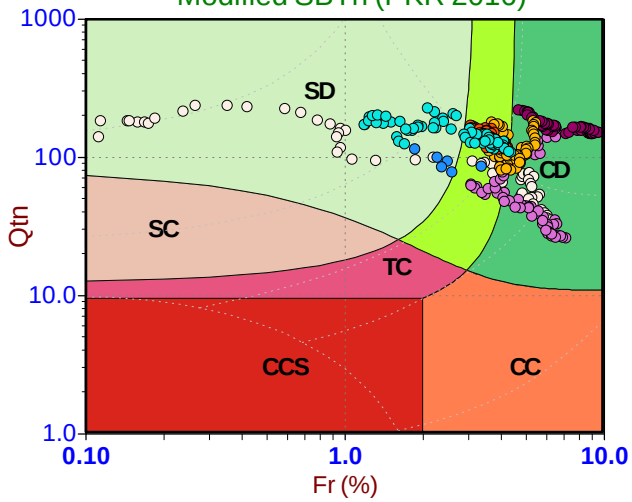

Standard SBT Chart (UBC 1986)

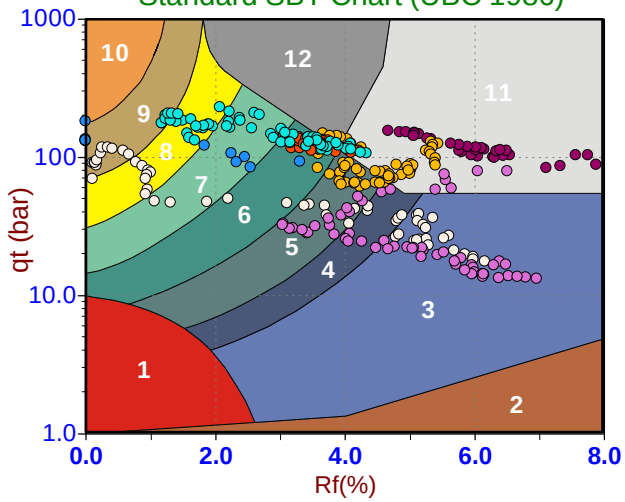

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-25 08:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT169
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

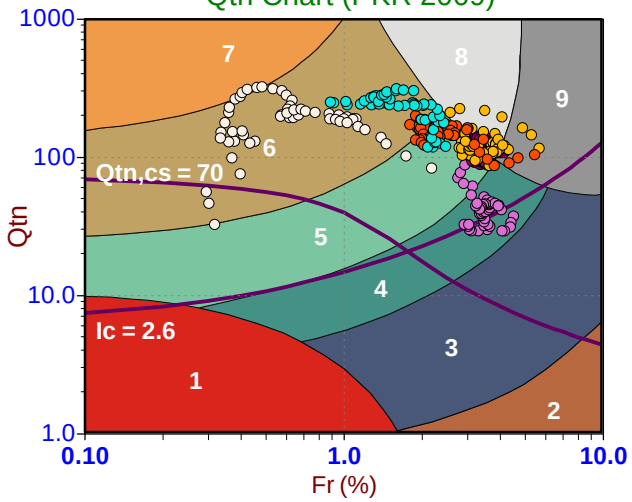

Modified SBTn (PKR 2016)

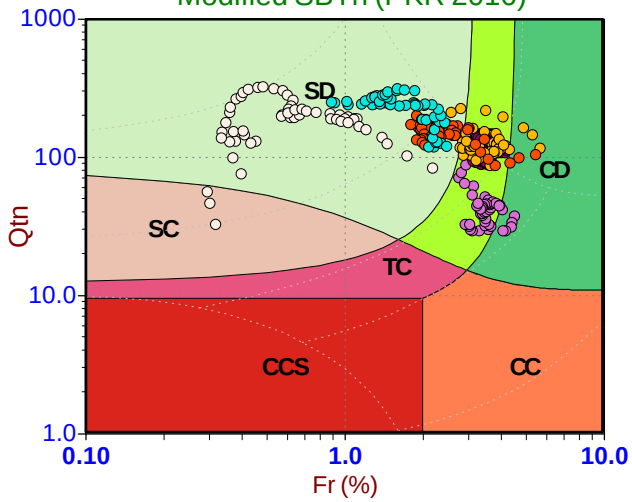

Standard SBT Chart (UBC 1986)

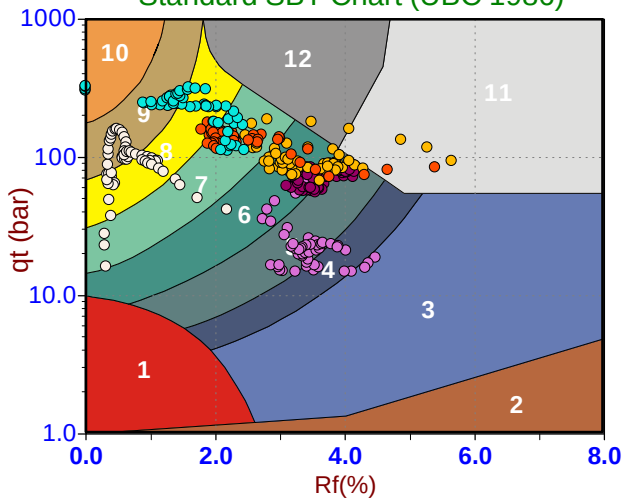

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-25 11:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT170
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

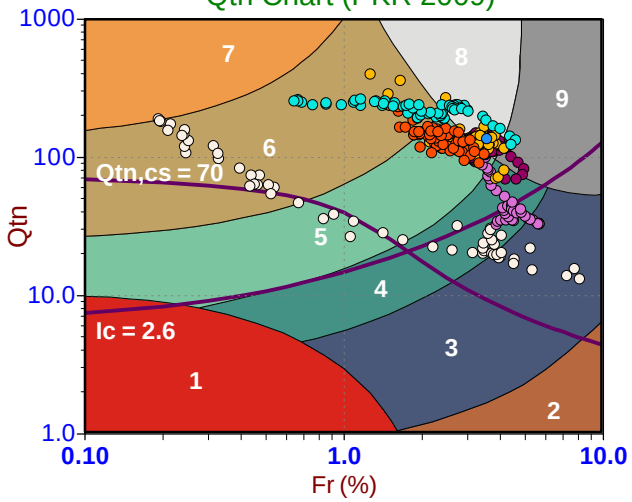

Modified SBTn (PKR 2016)

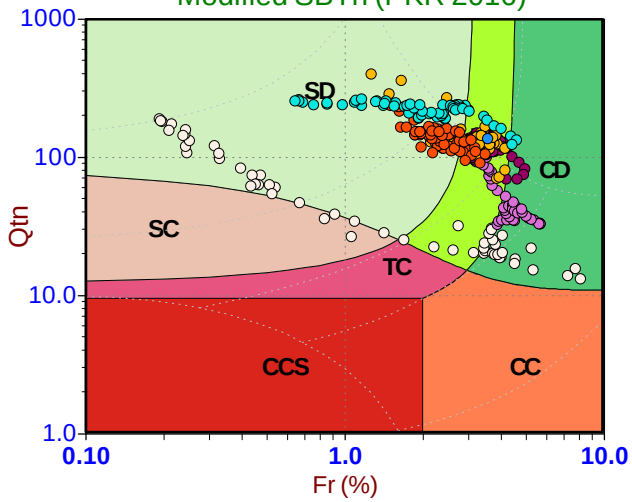

Standard SBT Chart (UBC 1986)

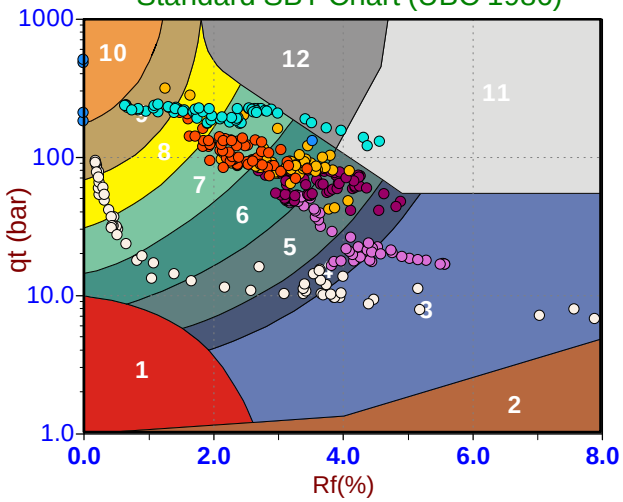

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-25 15:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT200
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

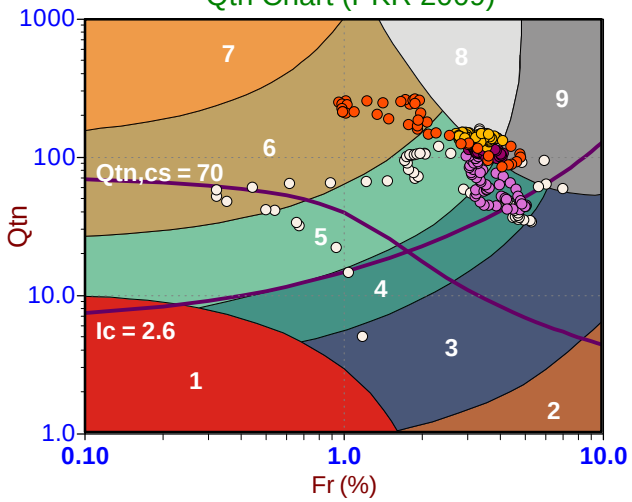

Modified SBTn (PKR 2016)

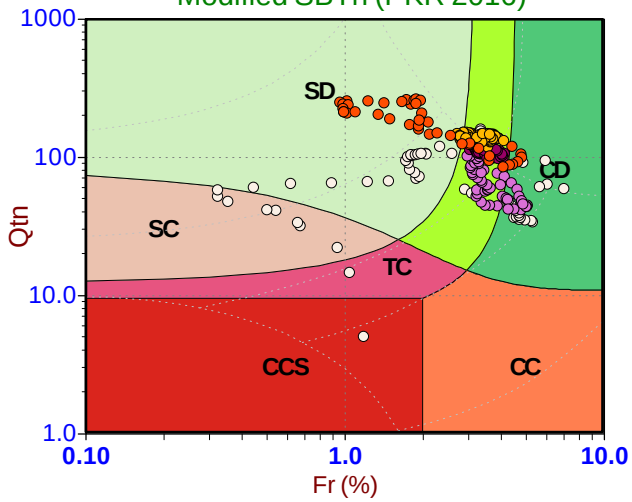

Standard SBT Chart (UBC 1986)

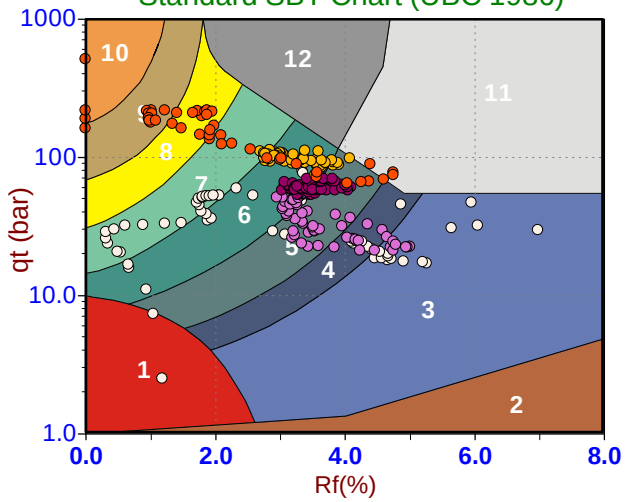

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-25 16:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT201
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

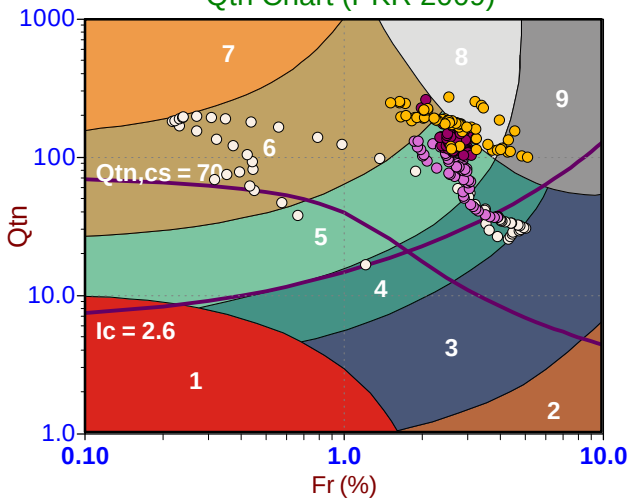

Modified SBTn (PKR 2016)

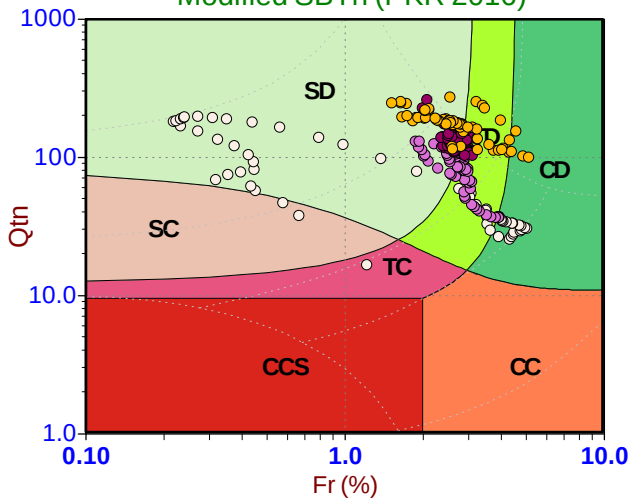

Standard SBT Chart (UBC 1986)

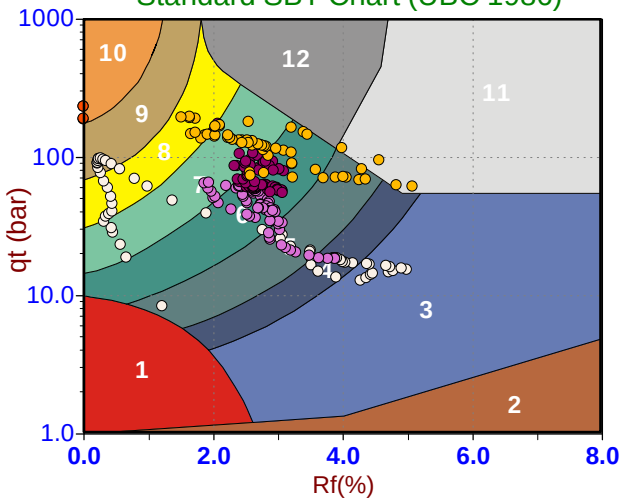

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-26 07:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT202
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

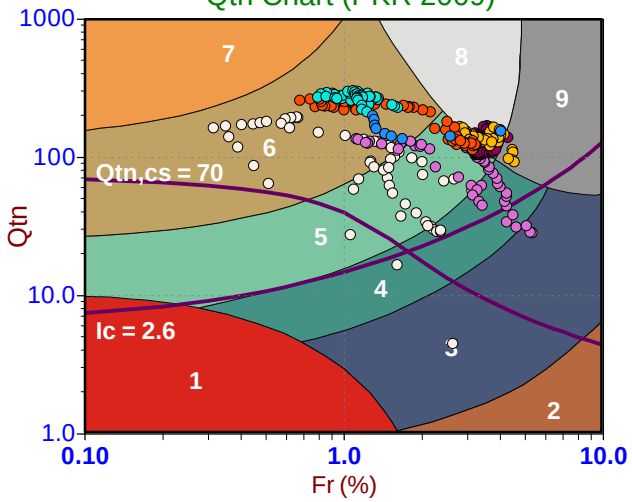

Modified SBTn (PKR 2016)

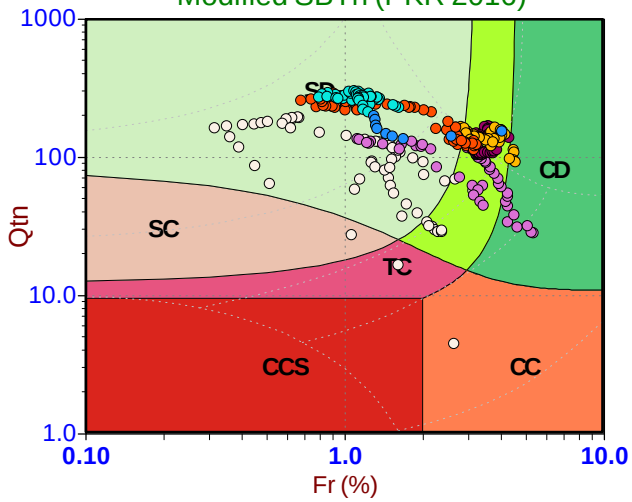

Standard SBT Chart (UBC 1986)

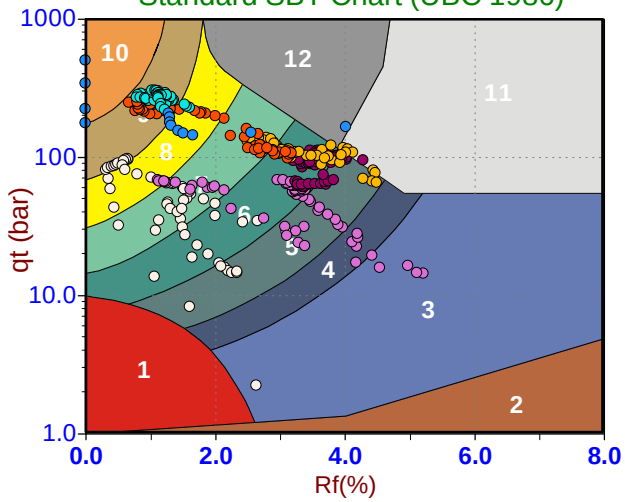

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-29 08:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT203
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

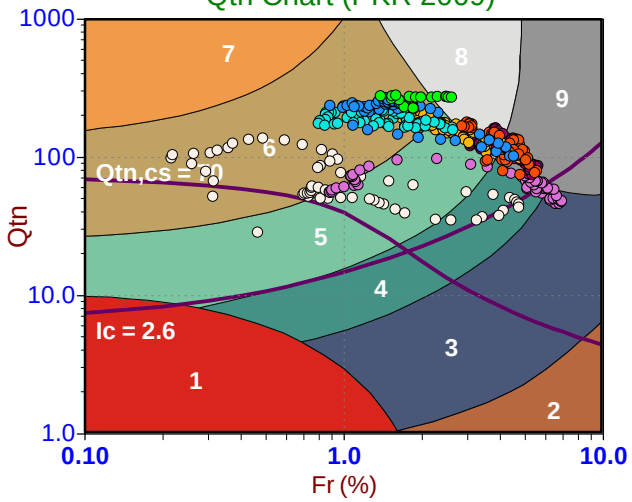

Modified SBTn (PKR 2016)

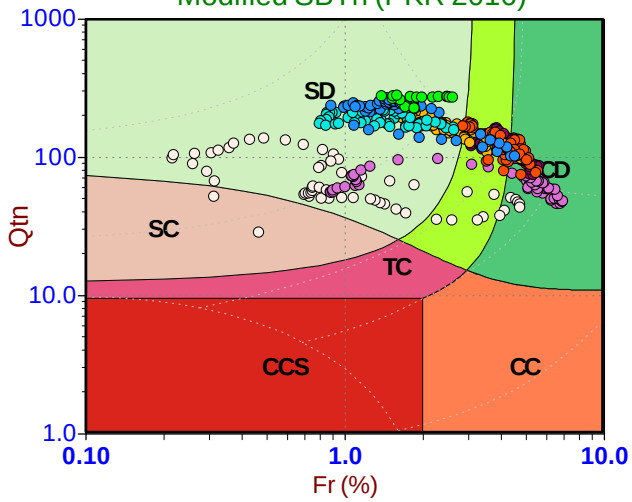

Standard SBT Chart (UBC 1986)

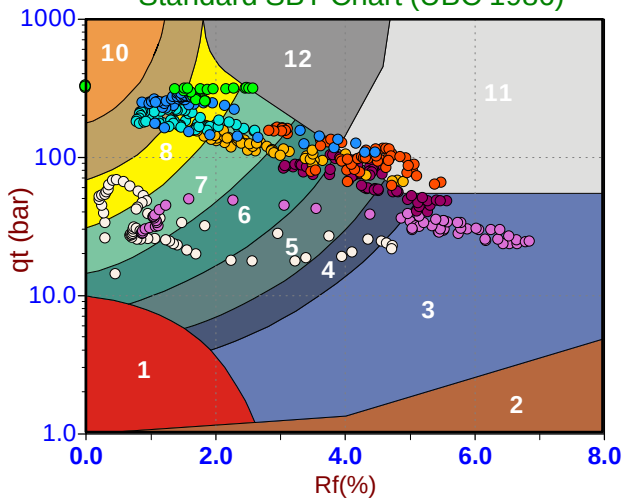

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-29 09:40
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT204
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

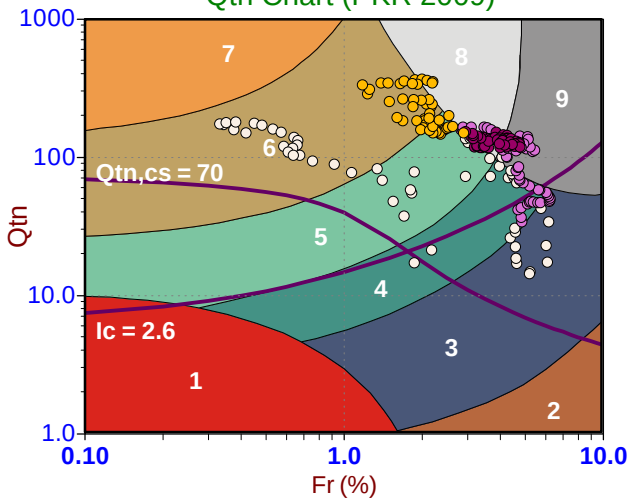

Modified SBTn (PKR 2016)

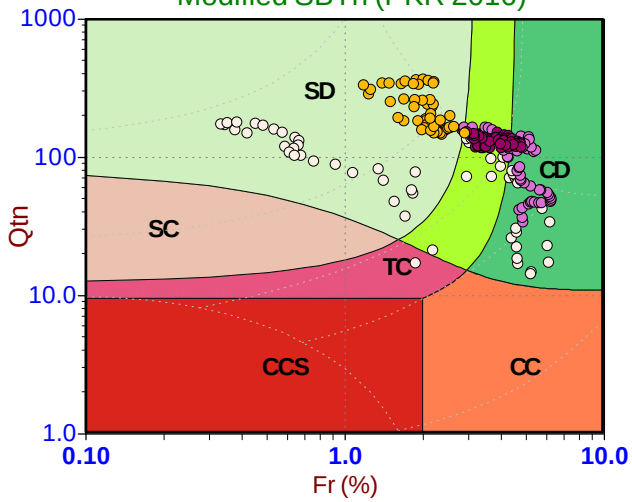

Standard SBT Chart (UBC 1986)

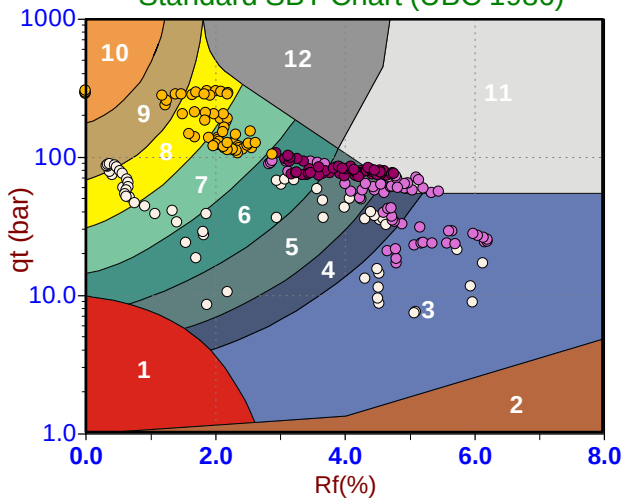

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-29 10:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT205
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

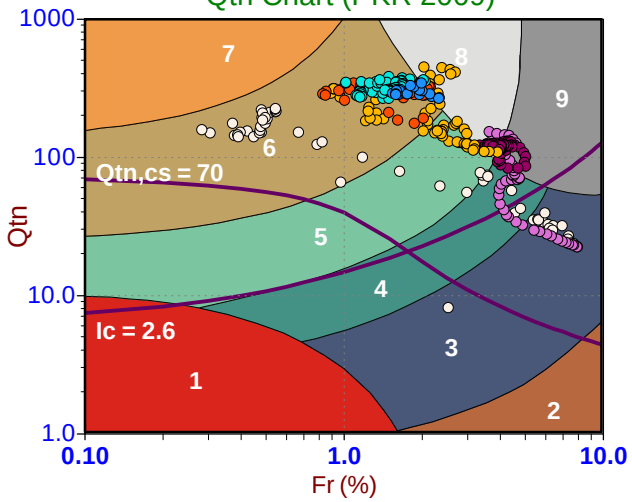

Modified SBTn (PKR 2016)

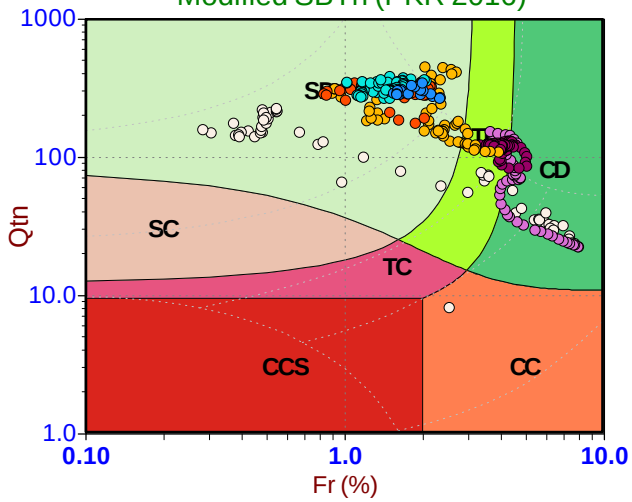

Standard SBT Chart (UBC 1986)

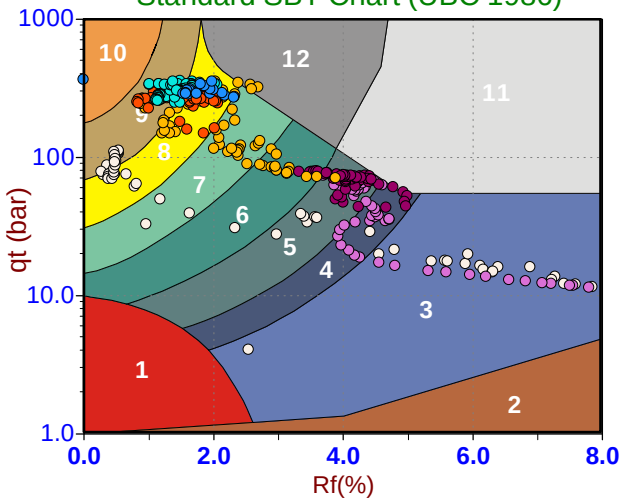

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-29 12:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT206
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

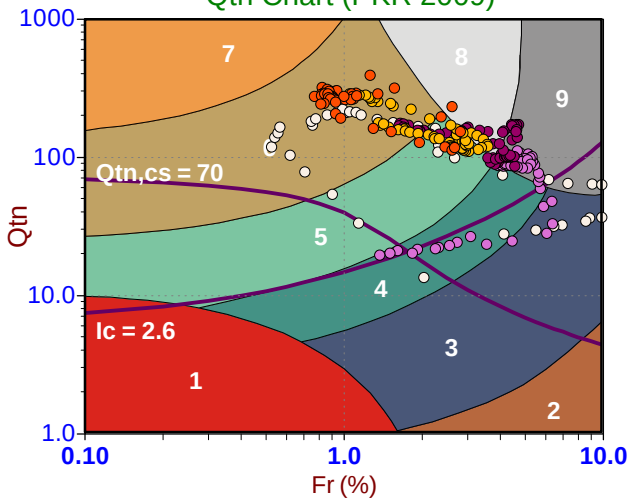

Modified SBTn (PKR 2016)

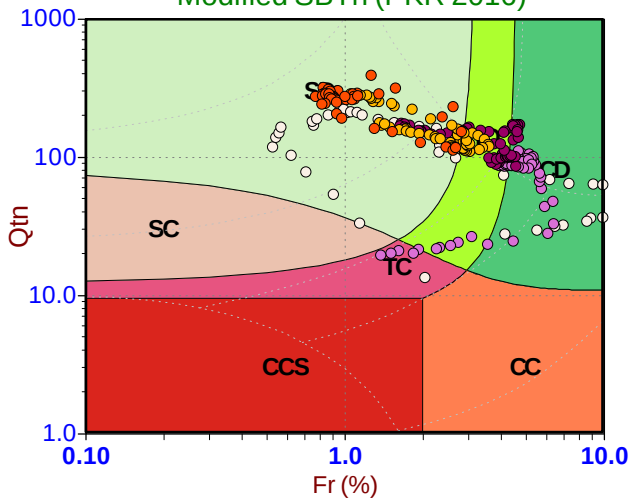

Standard SBT Chart (UBC 1986)

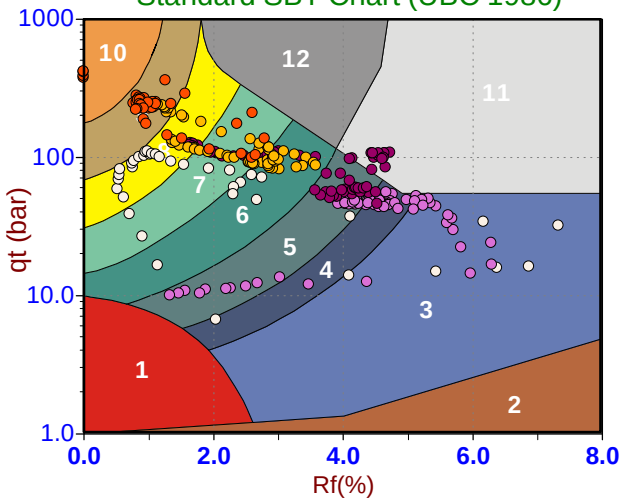

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-29 13:30
Site: Brooks, Alberta

Sounding: RCPT22-22CPT207
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

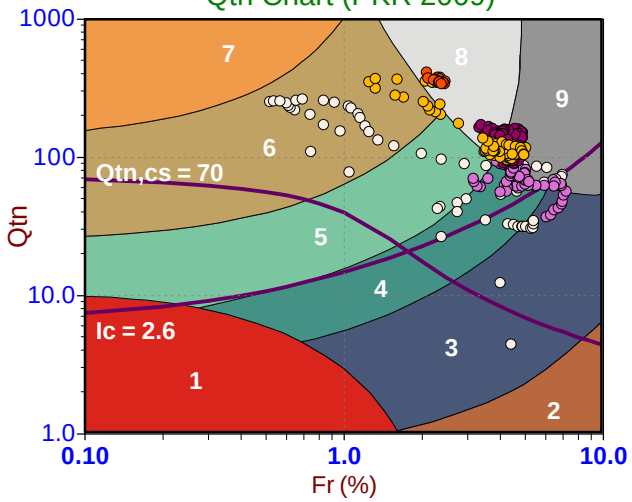

Modified SBTn (PKR 2016)

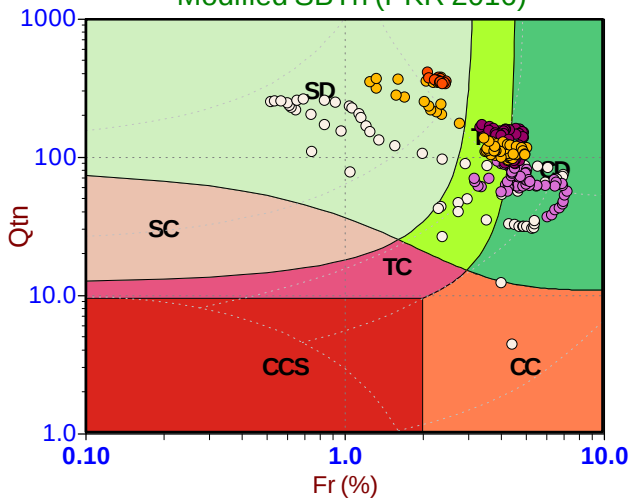

Standard SBT Chart (UBC 1986)

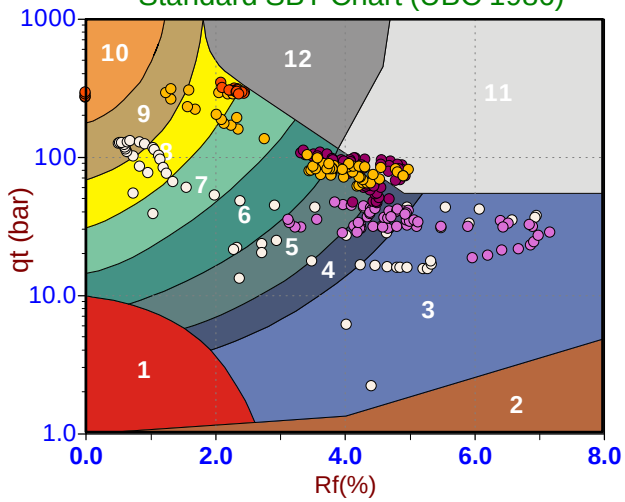

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-29 14:06
Site: Brooks Alberta

Sounding: RCPT22-22CPT208
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

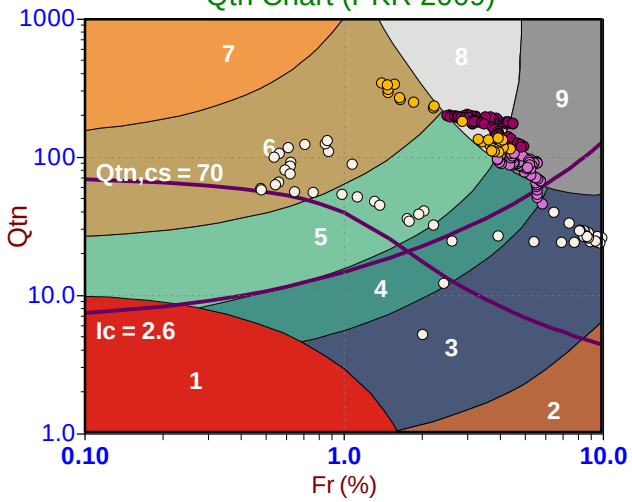

Modified SBTn (PKR 2016)

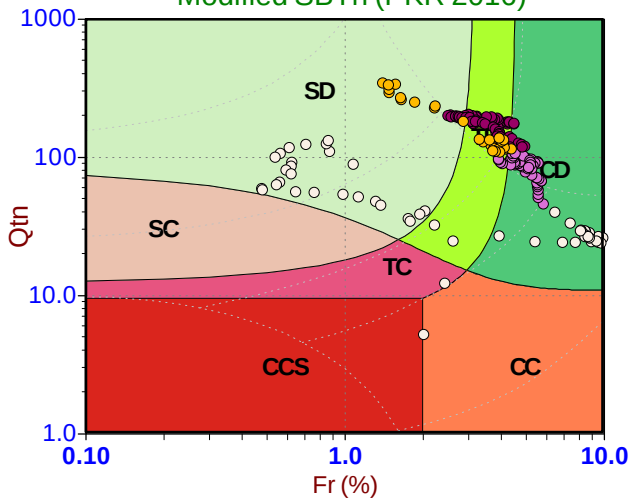

Standard SBT Chart (UBC 1986)

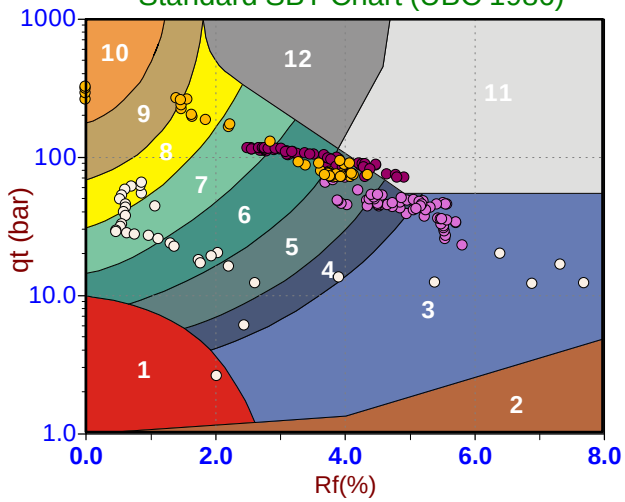

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-29 15:07
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT209
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

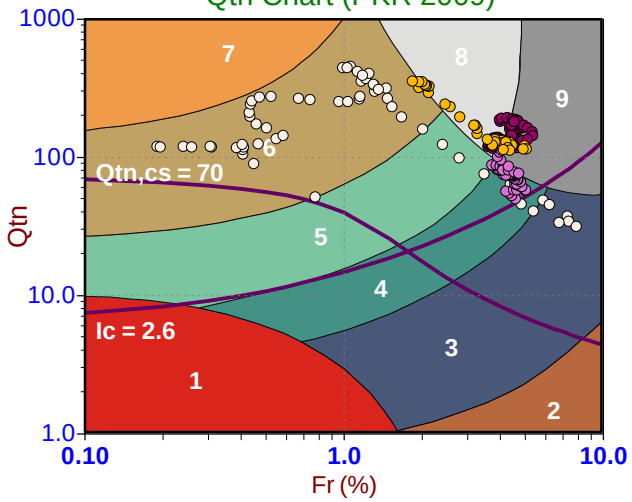

Modified SBTn (PKR 2016)

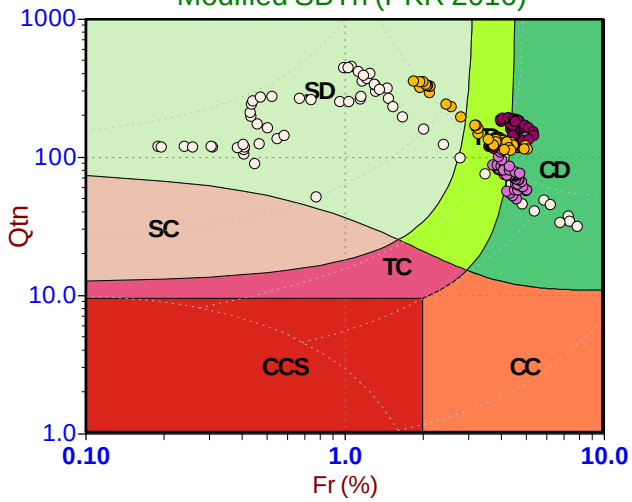

Standard SBT Chart (UBC 1986)

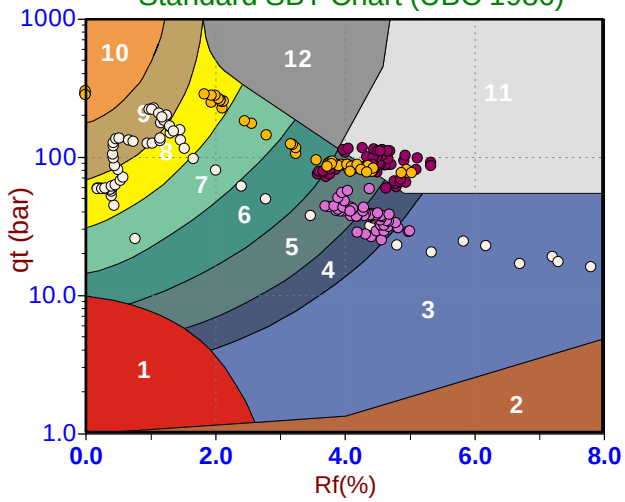

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-29 15:55
Site: Brooks, Alberta

Sounding: RCPT22-22CPT210
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

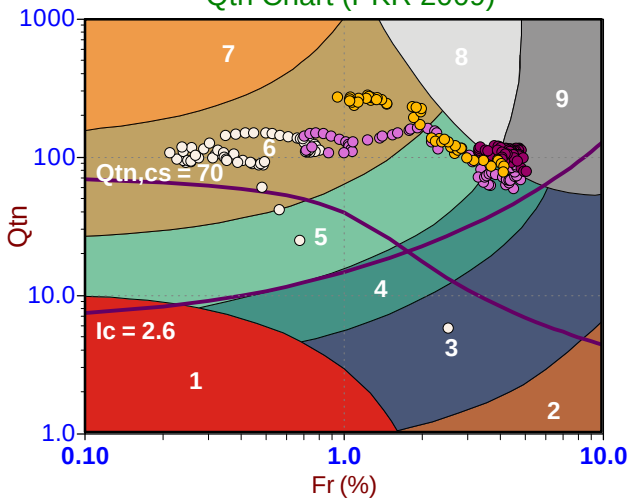

Modified SBTn (PKR 2016)

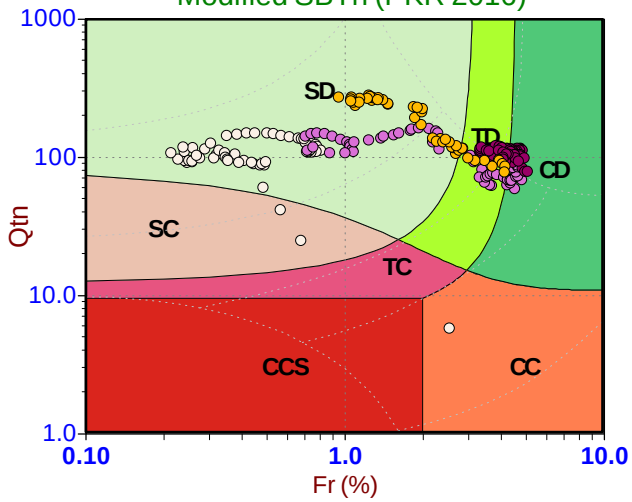

Standard SBT Chart (UBC 1986)

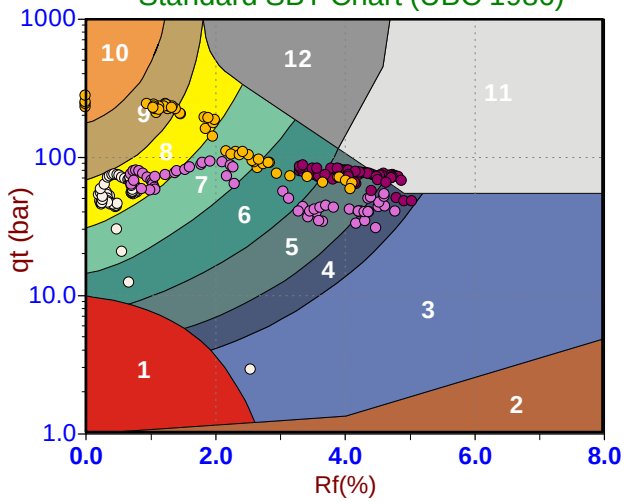

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-29 16:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT211
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

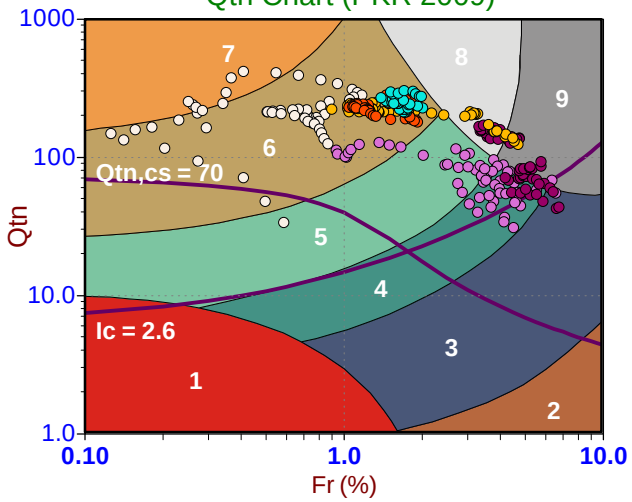

Modified SBTn (PKR 2016)

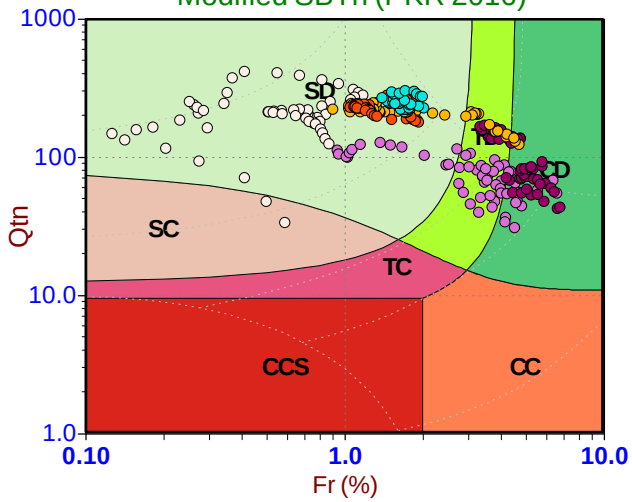

Standard SBT Chart (UBC 1986)

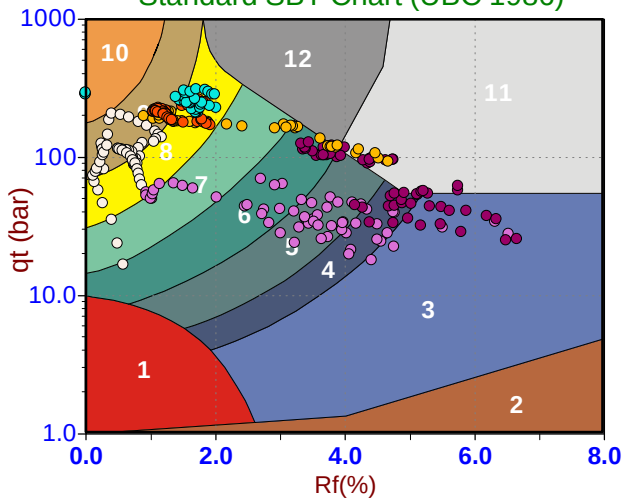

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-29 17:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT212
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

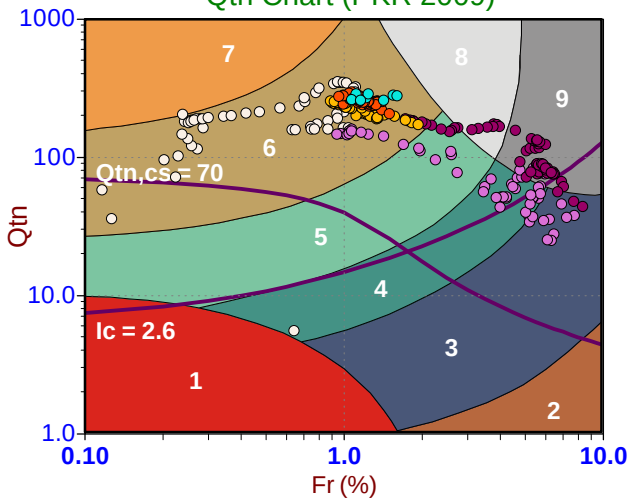

Modified SBTn (PKR 2016)

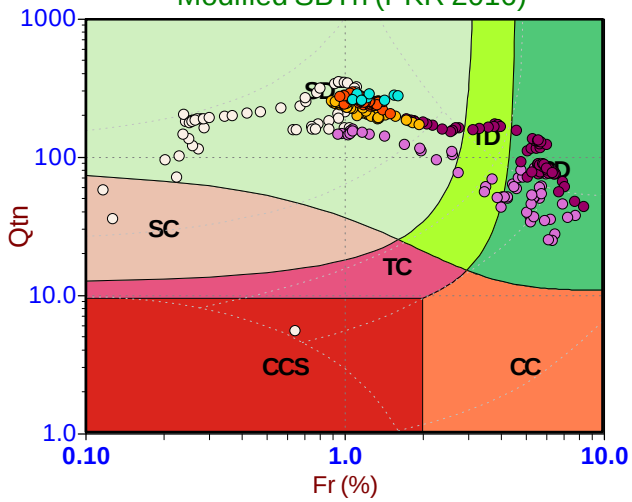

Standard SBT Chart (UBC 1986)

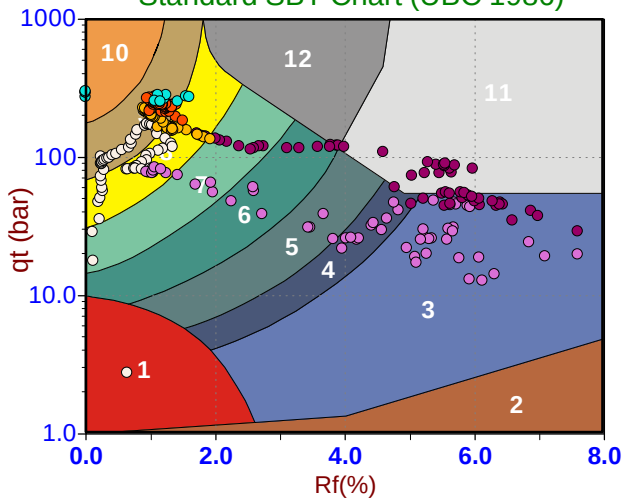

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-30 06:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT213
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

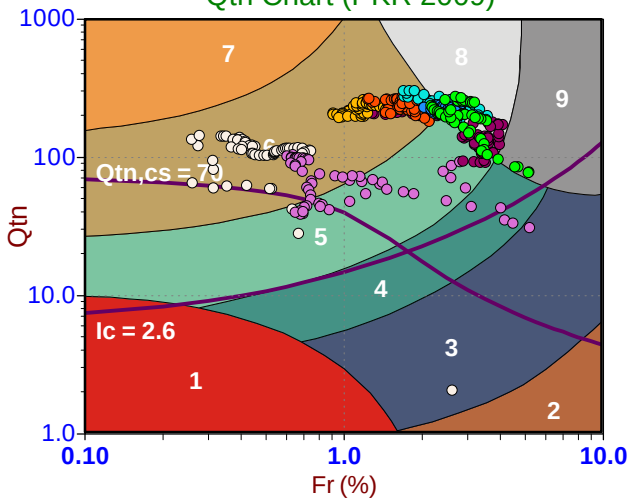

Modified SBTn (PKR 2016)

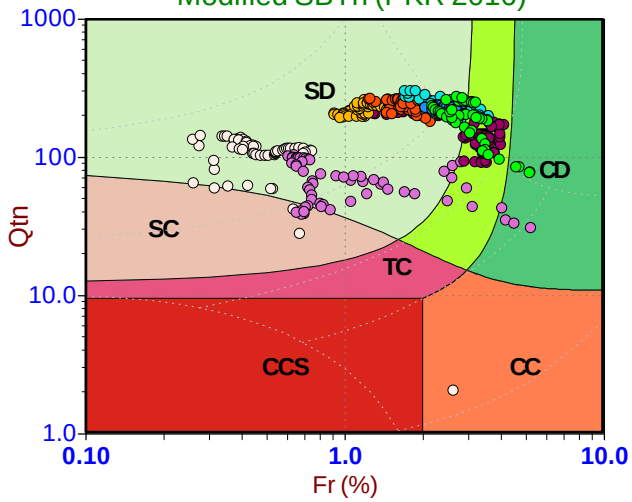

Standard SBT Chart (UBC 1986)

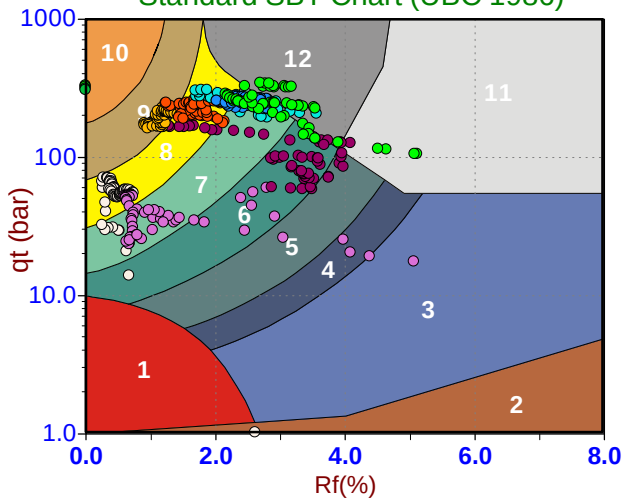

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-30 08:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT214
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

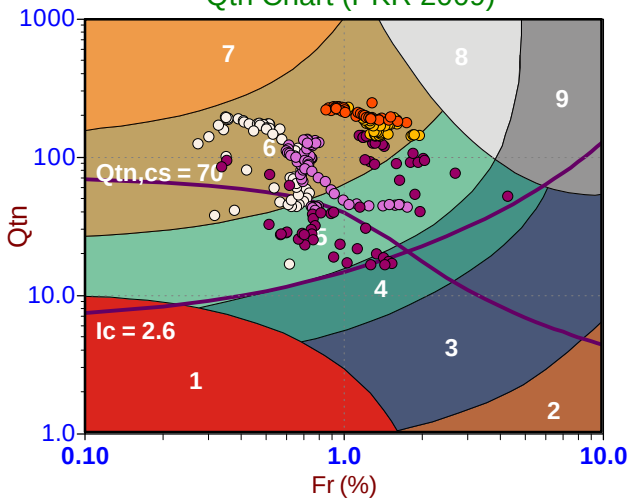

Modified SBTn (PKR 2016)

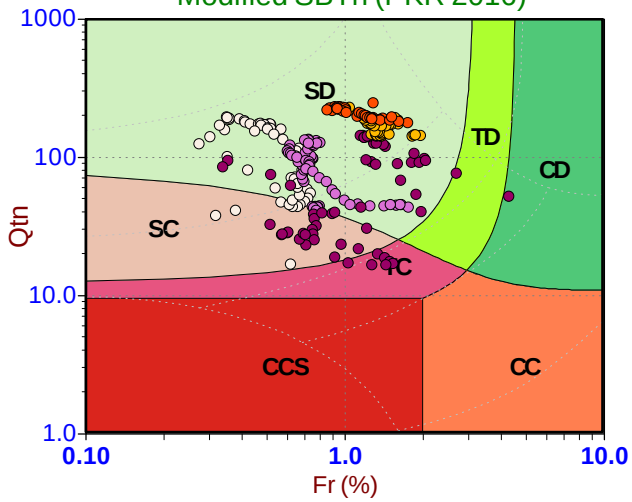

Standard SBT Chart (UBC 1986)

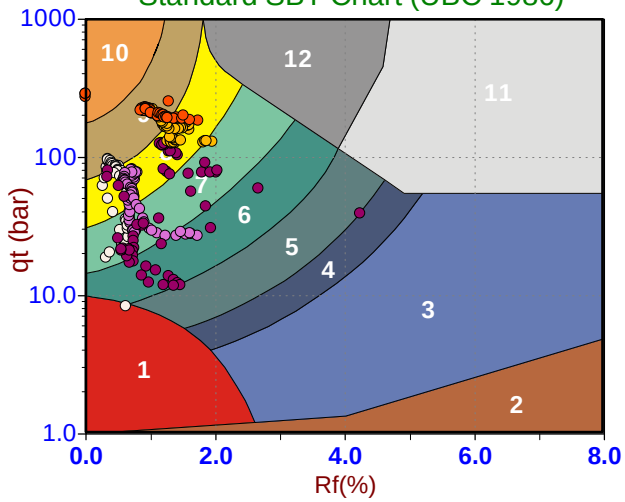

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-30 09:20
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT215
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

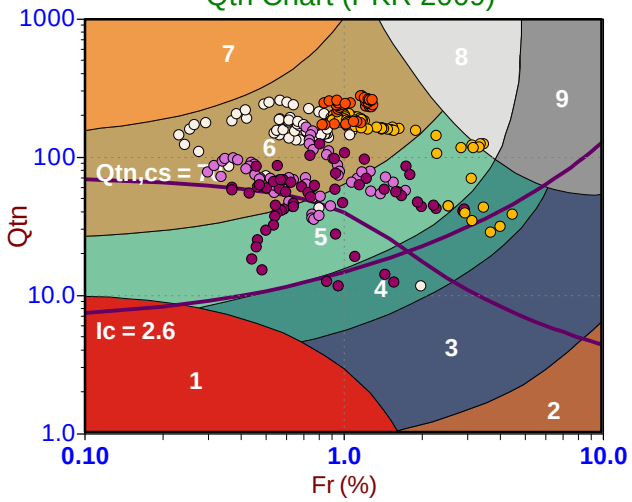

Modified SBTn (PKR 2016)

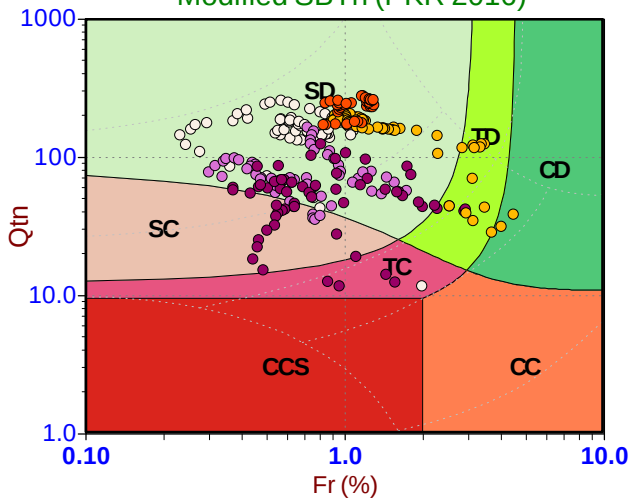

Standard SBT Chart (UBC 1986)

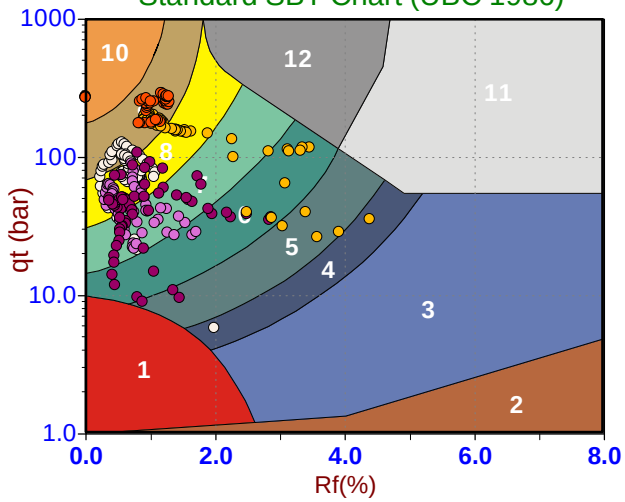

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-30 10:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT216
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

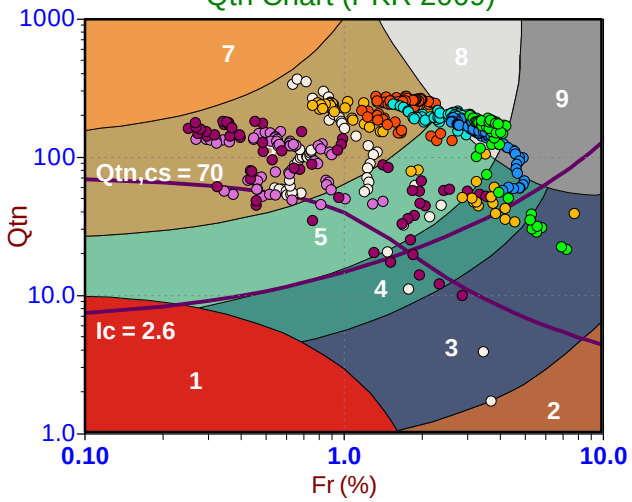

Modified SBTn (PKR 2016)

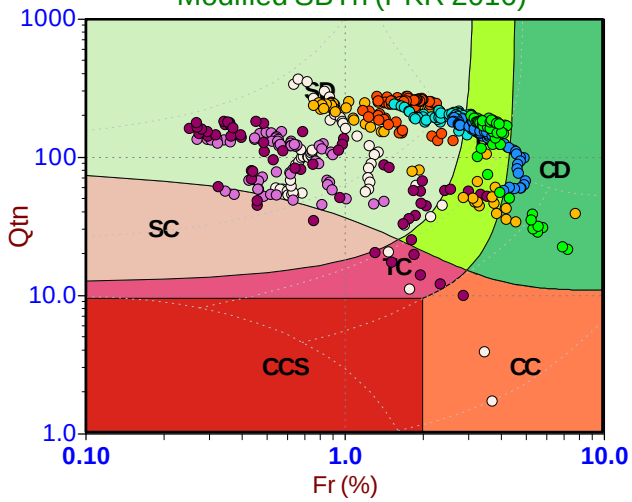

Standard SBT Chart (UBC 1986)

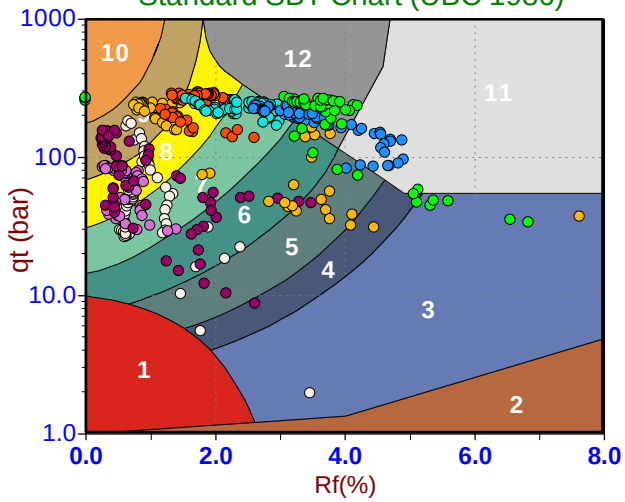

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-30 11:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT217
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

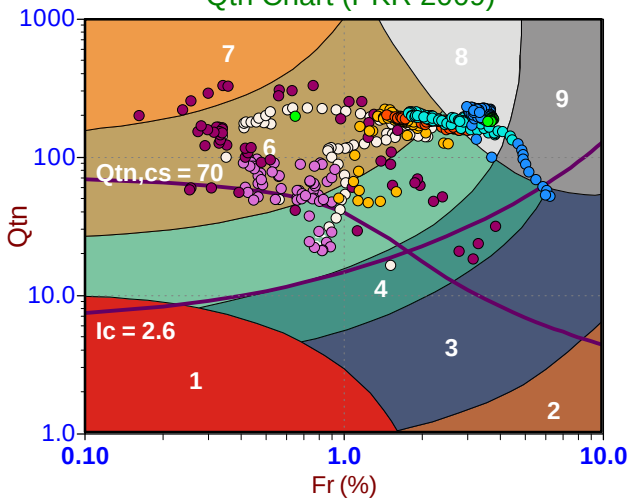

Modified SBTn (PKR 2016)

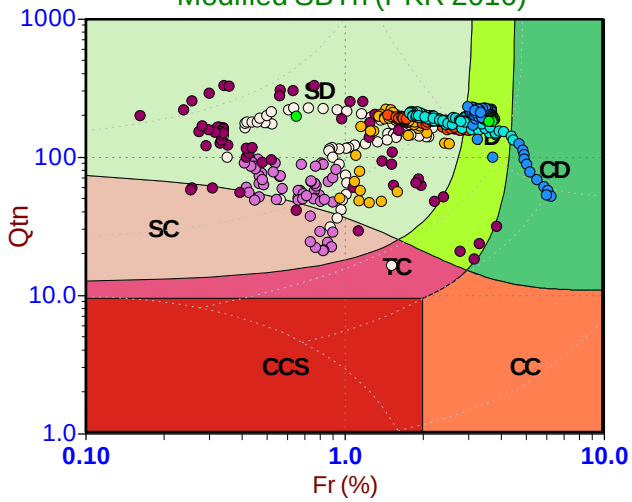

Standard SBT Chart (UBC 1986)

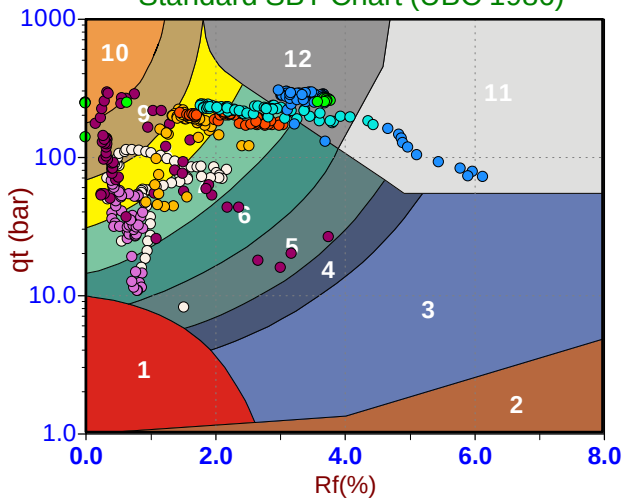

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-30 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT218
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

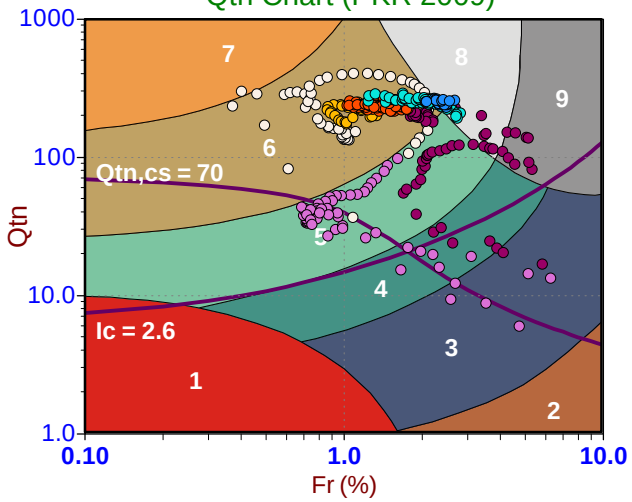

Modified SBTn (PKR 2016)

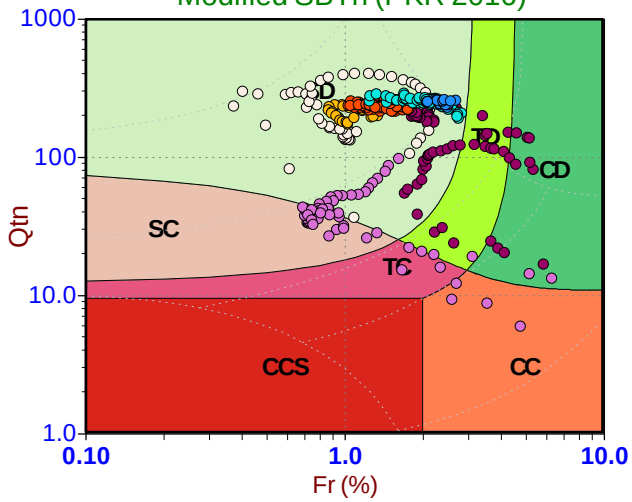

Standard SBT Chart (UBC 1986)

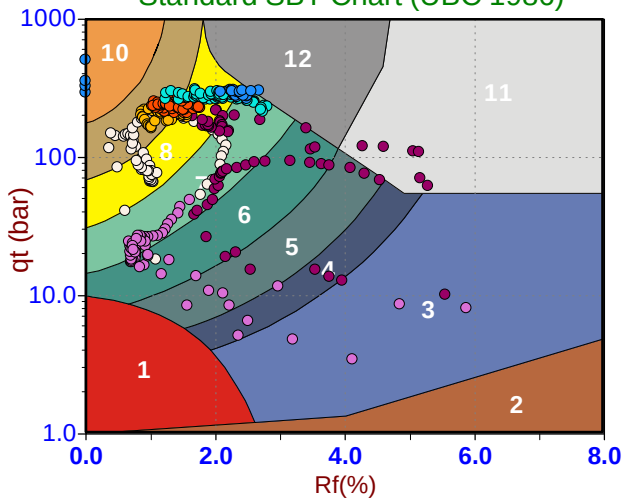

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-30 14:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT219
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

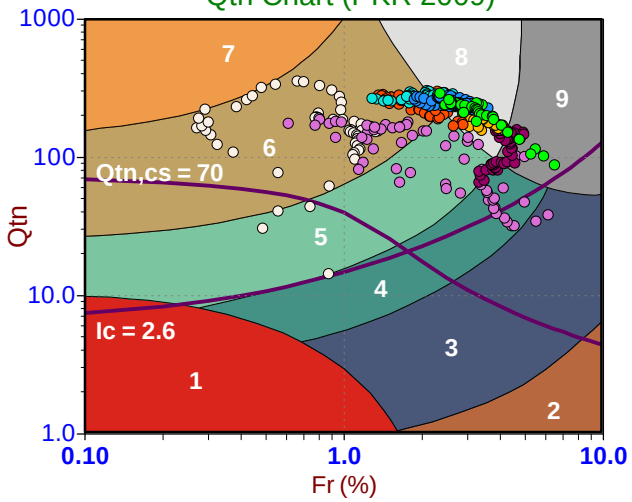

Modified SBTn (PKR 2016)

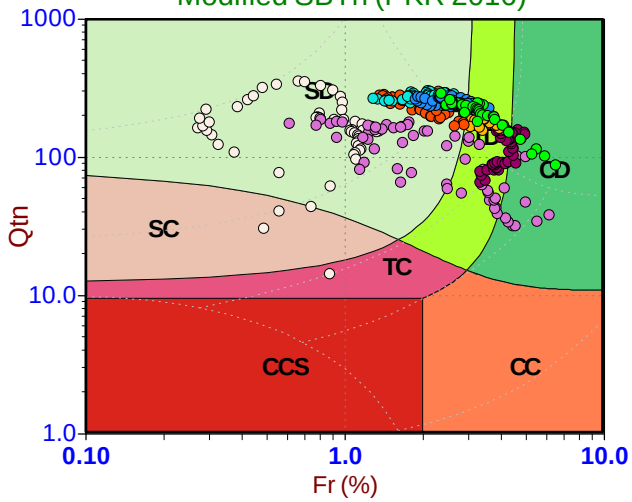

Standard SBT Chart (UBC 1986)

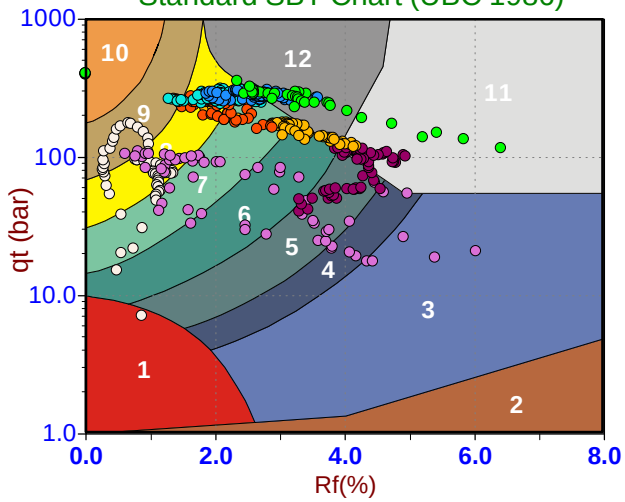

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-30 15:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT220
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

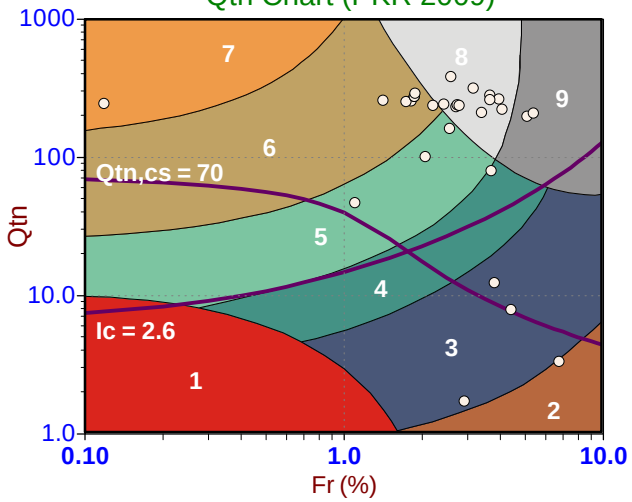

Modified SBTn (PKR 2016)

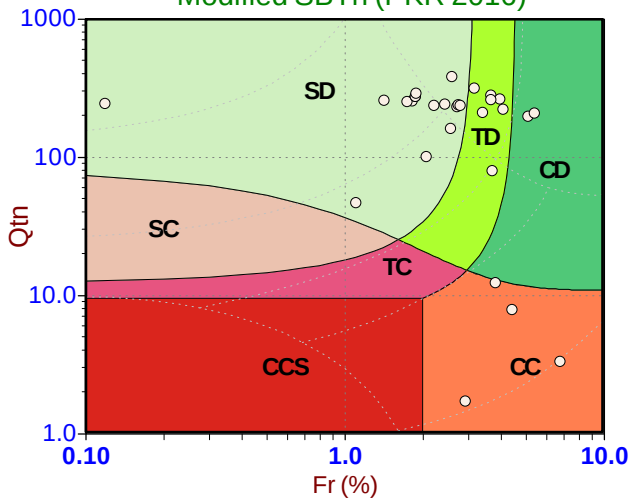

Standard SBT Chart (UBC 1986)

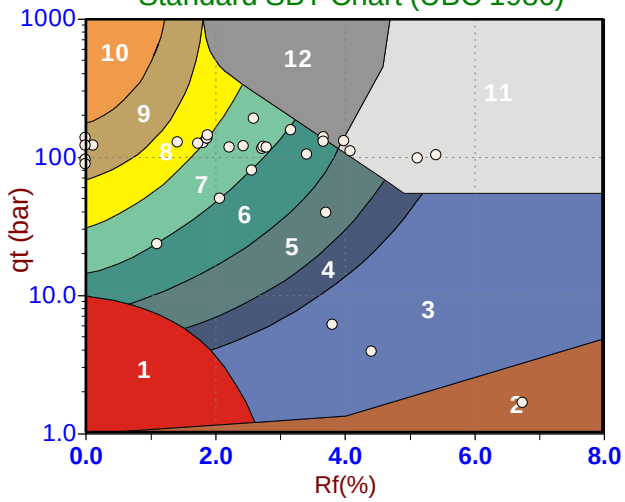

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-30 16:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT220B
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

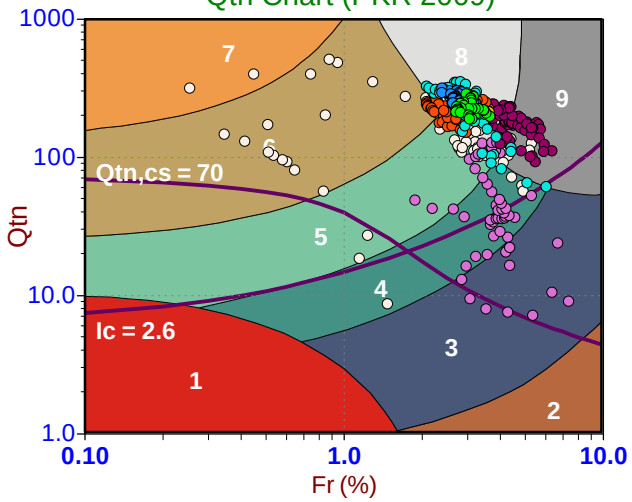

Modified SBTn (PKR 2016)

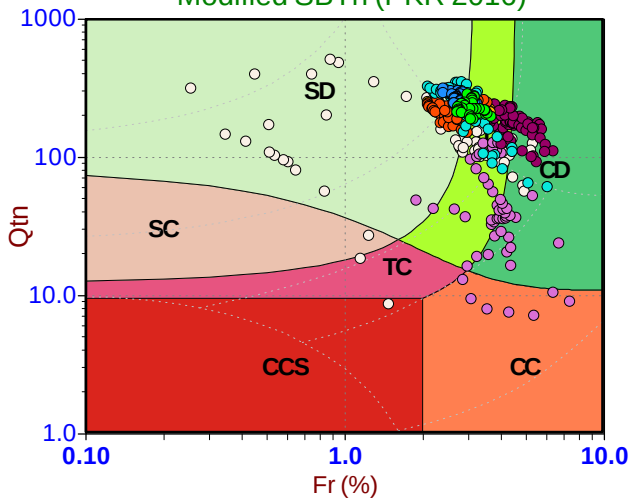

Standard SBT Chart (UBC 1986)

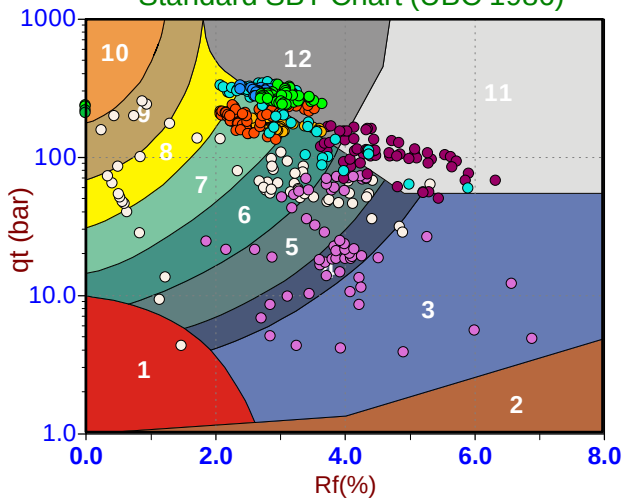

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-30 17:44
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT221
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

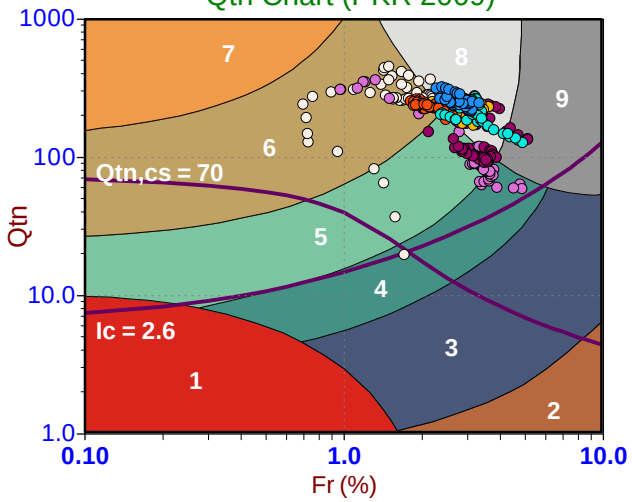

Modified SBTn (PKR 2016)

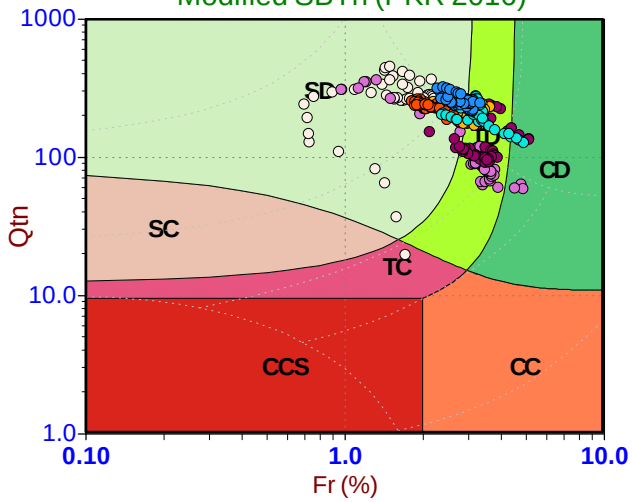

Standard SBT Chart (UBC 1986)

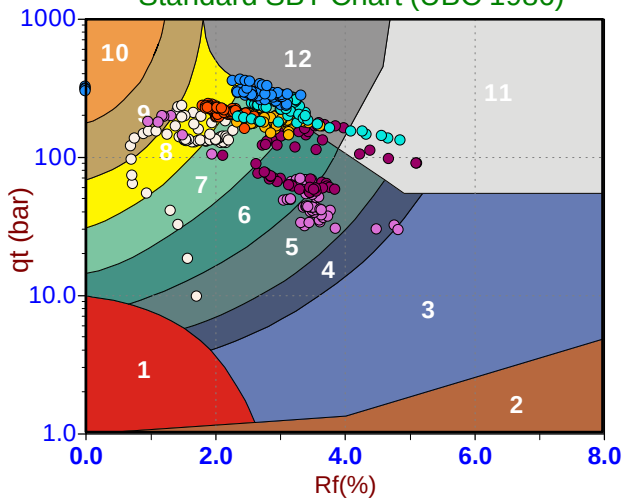

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-31 06:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT222
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

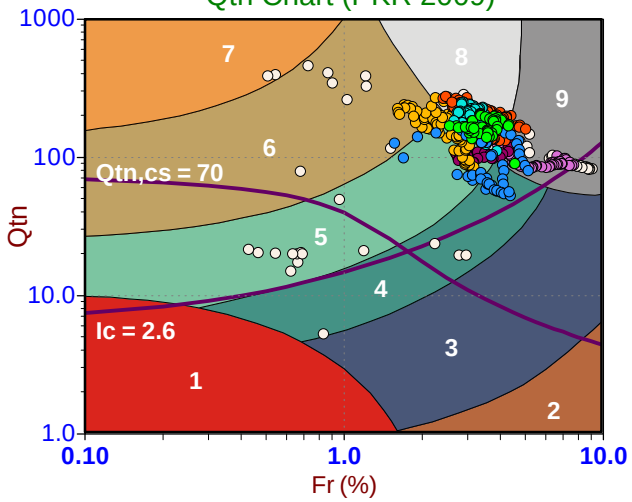

Modified SBTn (PKR 2016)

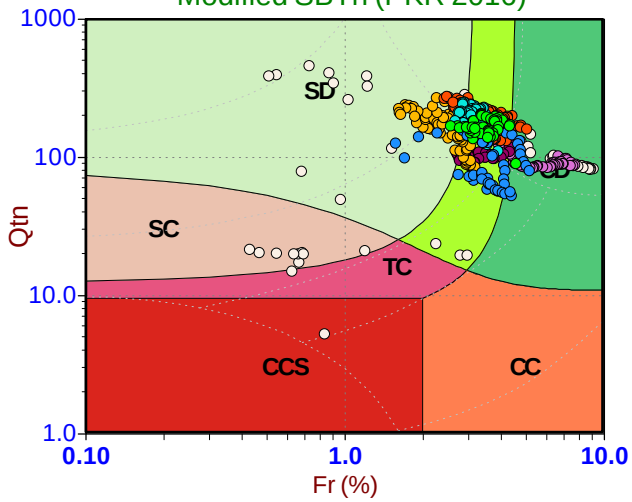

Standard SBT Chart (UBC 1986)

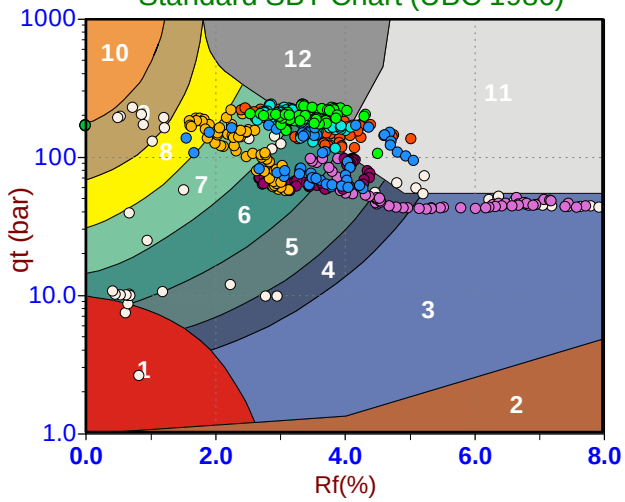

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-31 07:33
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT223
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

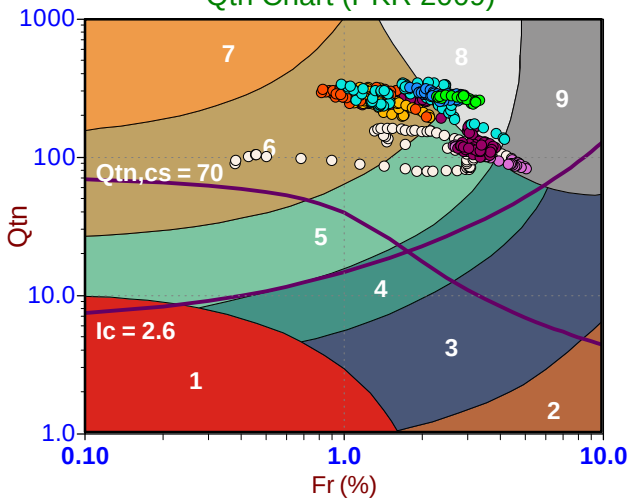

Modified SBTn (PKR 2016)

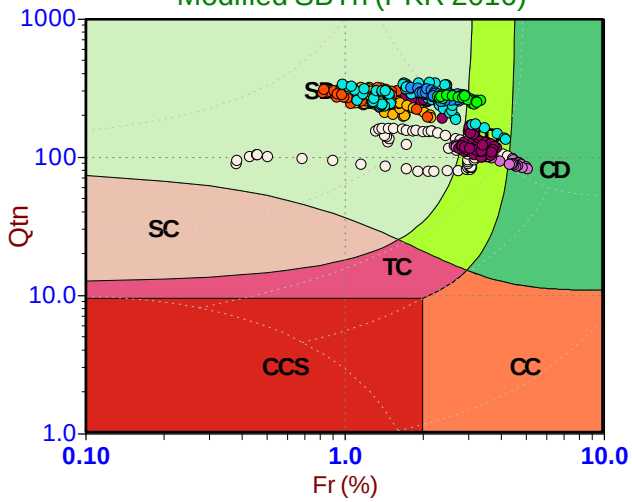

Standard SBT Chart (UBC 1986)

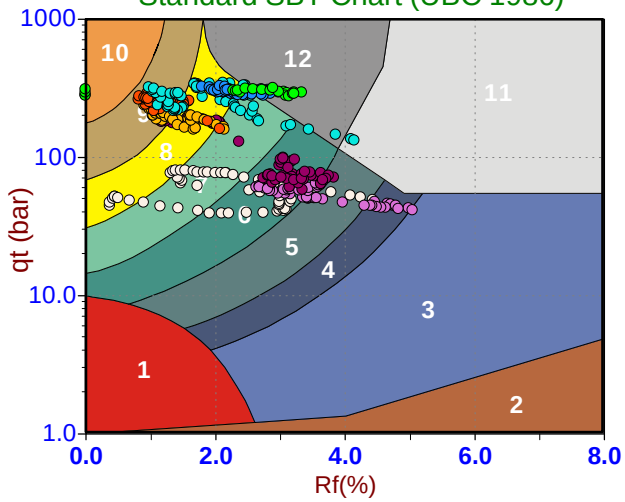

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-31 09:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT224
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

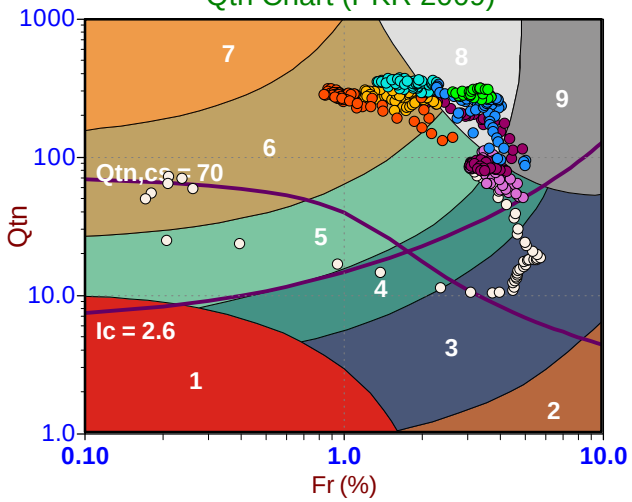

Modified SBTn (PKR 2016)

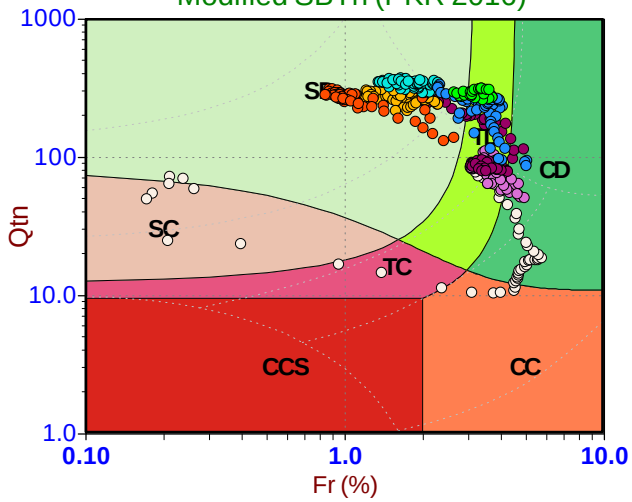

Standard SBT Chart (UBC 1986)

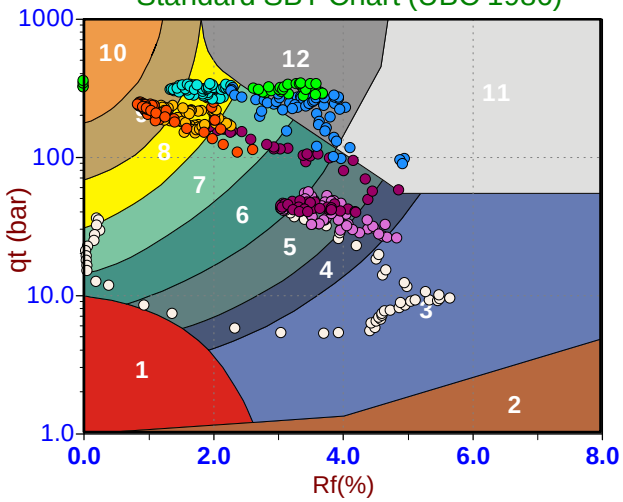

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-13 06:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT225
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

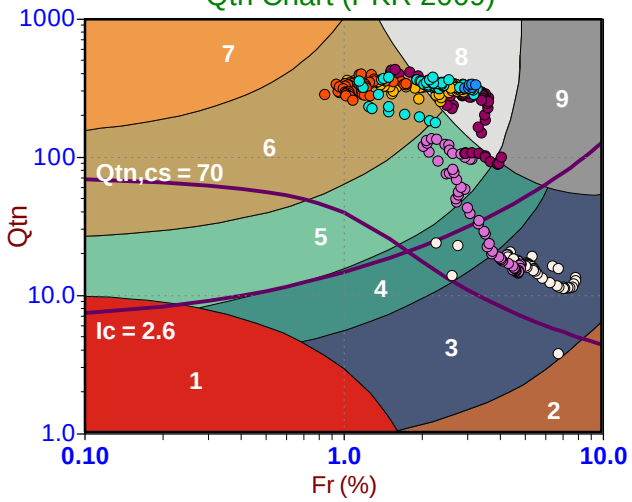

Modified SBTn (PKR 2016)

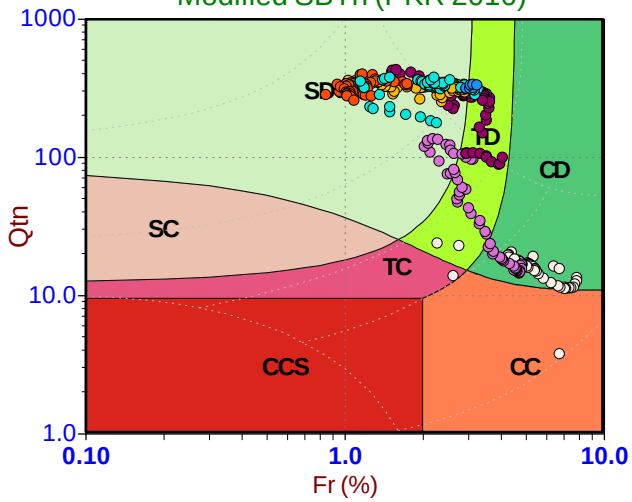

Standard SBT Chart (UBC 1986)

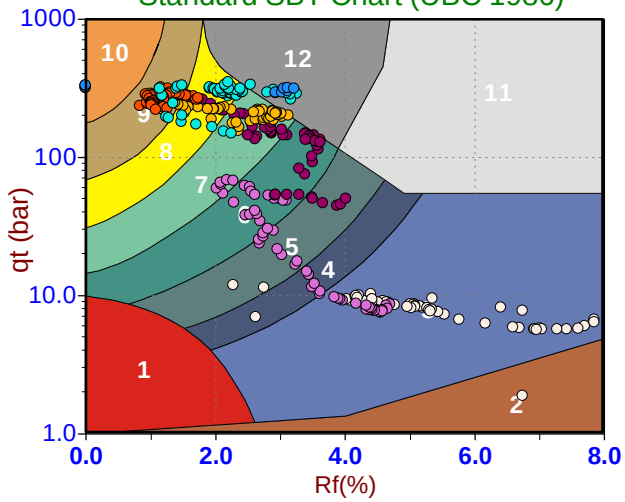

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-31 11:08
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT226
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

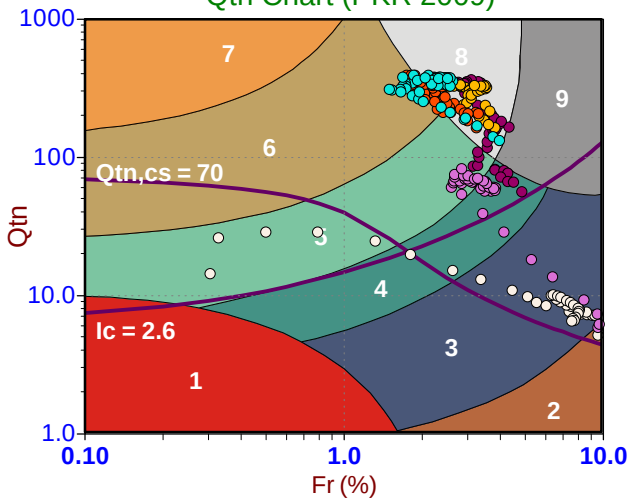

Modified SBTn (PKR 2016)

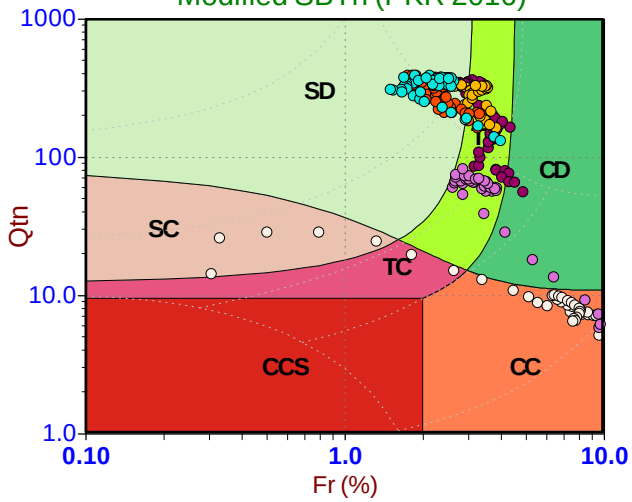

Standard SBT Chart (UBC 1986)

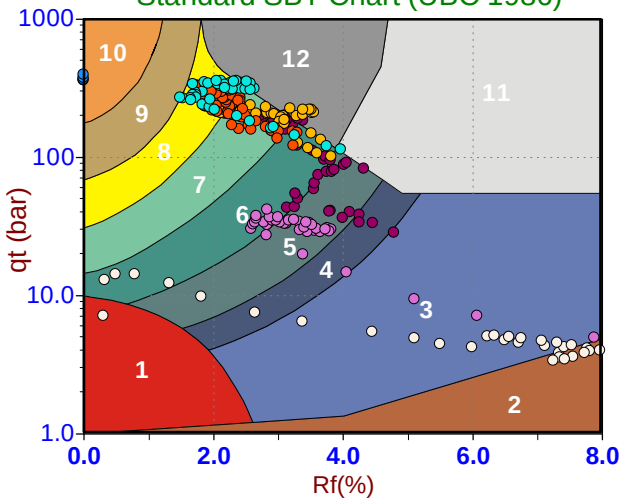

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-31 12:42
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT227
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

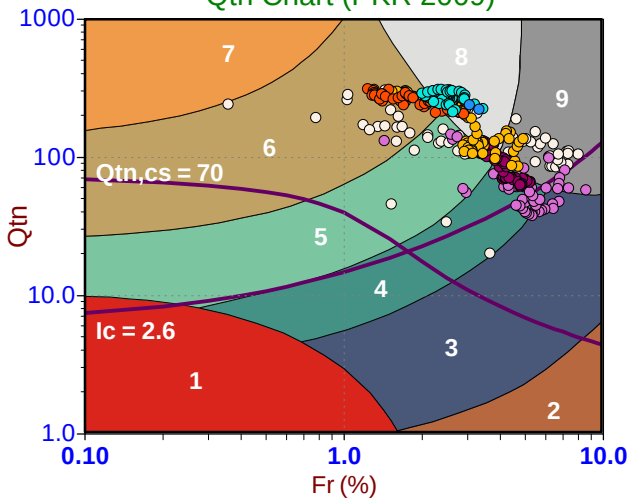

Modified SBTn (PKR 2016)

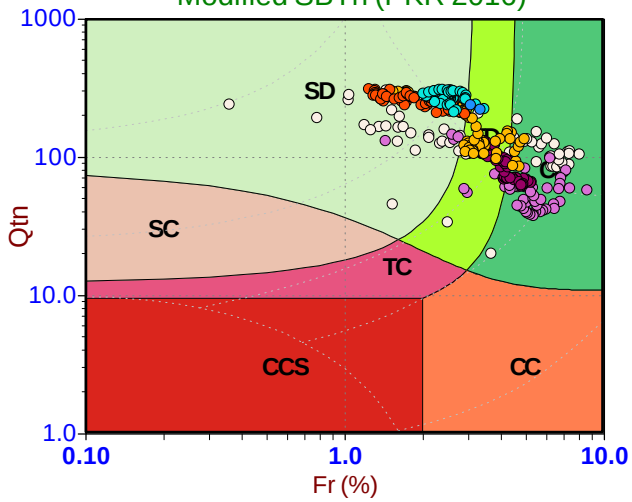

Standard SBT Chart (UBC 1986)

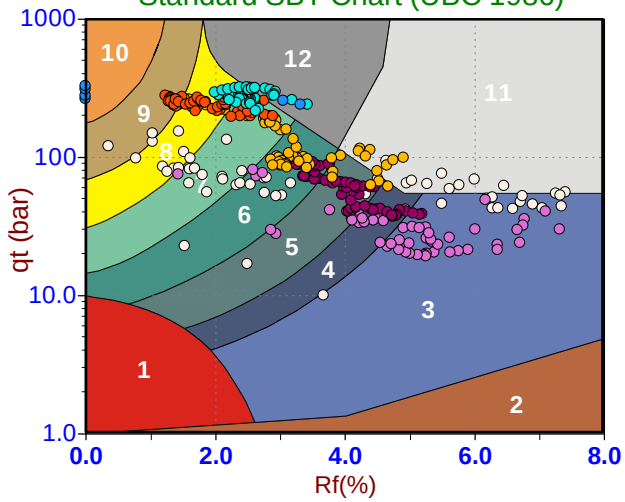

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-31 13:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

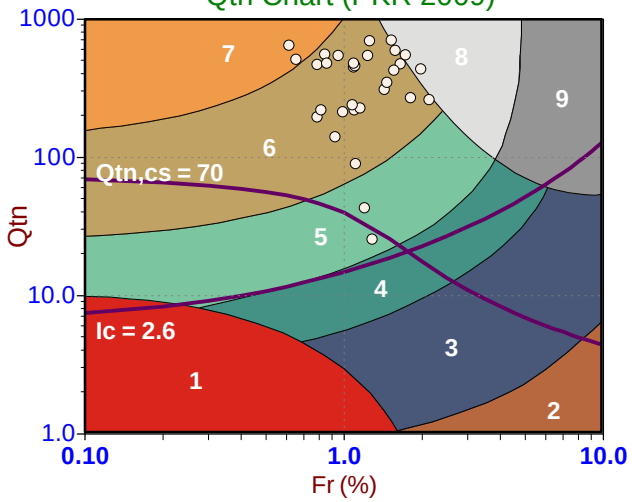

Modified SBTn (PKR 2016)

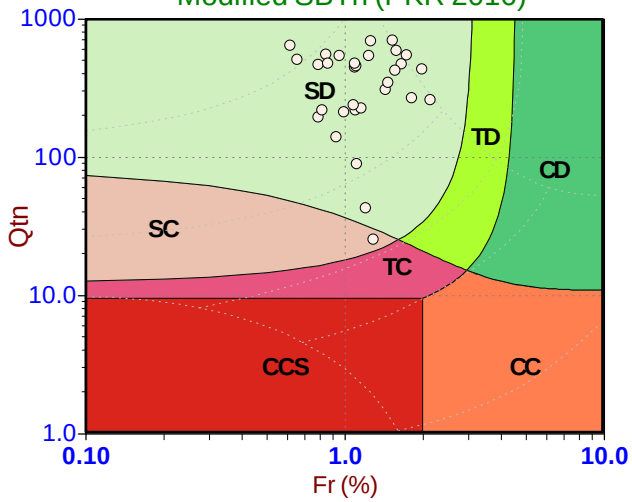

Standard SBT Chart (UBC 1986)

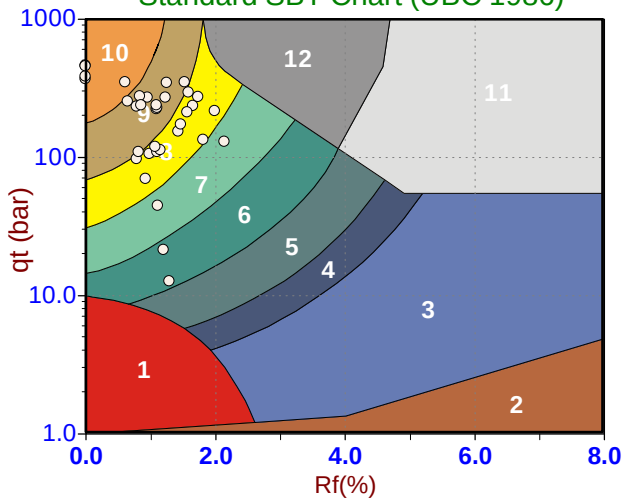

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-31 14:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228B
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

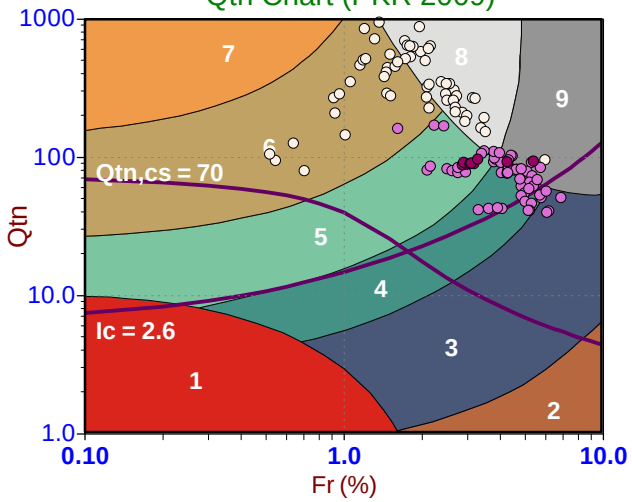

Modified SBTn (PKR 2016)

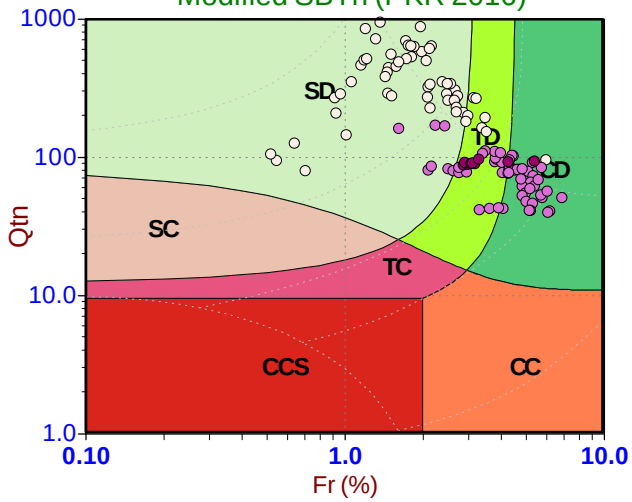

Standard SBT Chart (UBC 1986)

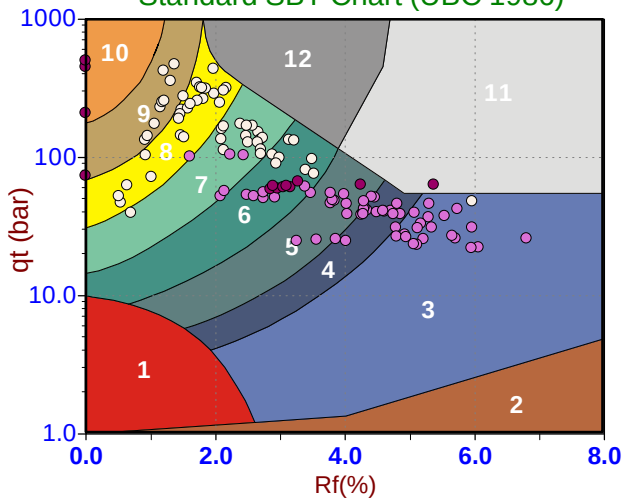

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-31 14:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT228C
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

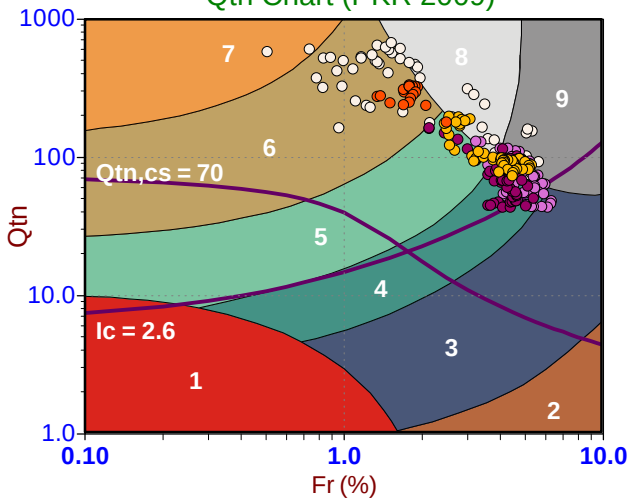

Modified SBTn (PKR 2016)

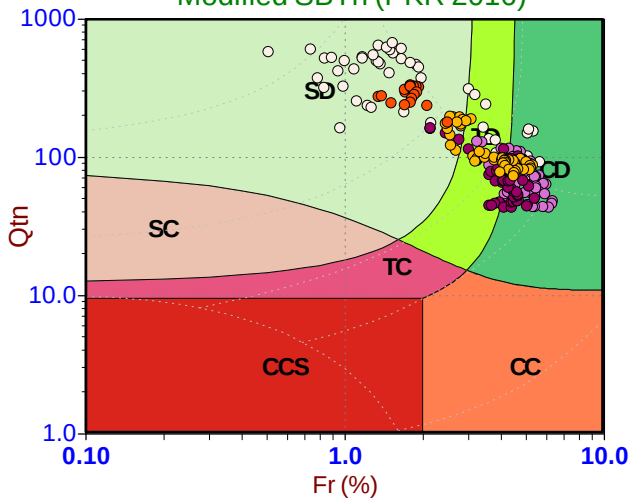

Standard SBT Chart (UBC 1986)

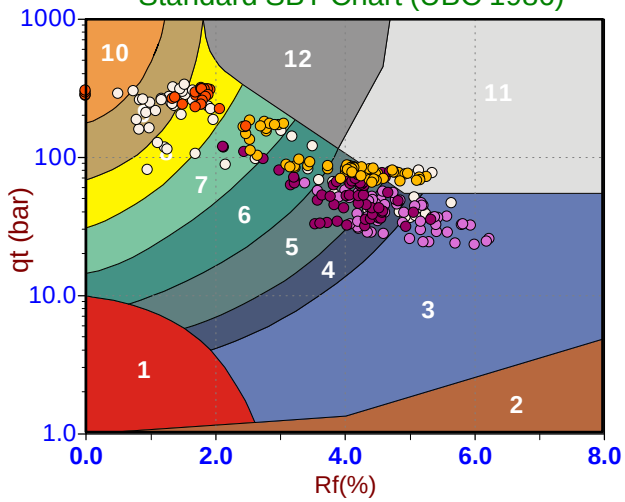

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-31 15:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT229
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

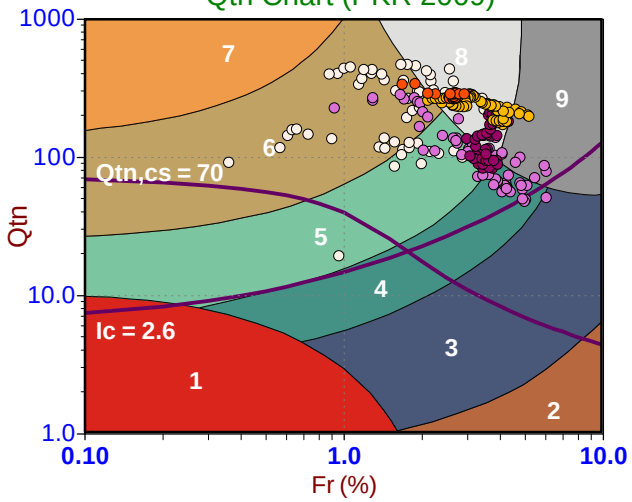

Modified SBTn (PKR 2016)

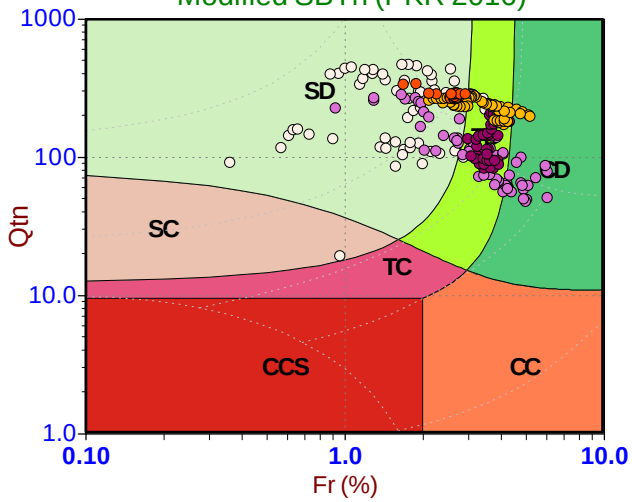

Standard SBT Chart (UBC 1986)

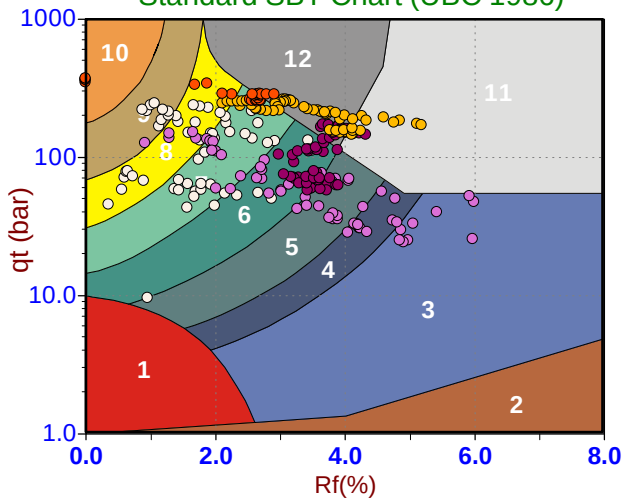

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-31 16:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT230
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

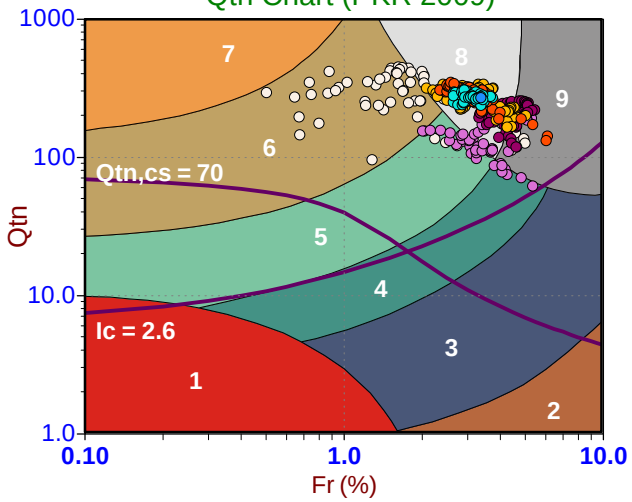

Modified SBTn (PKR 2016)

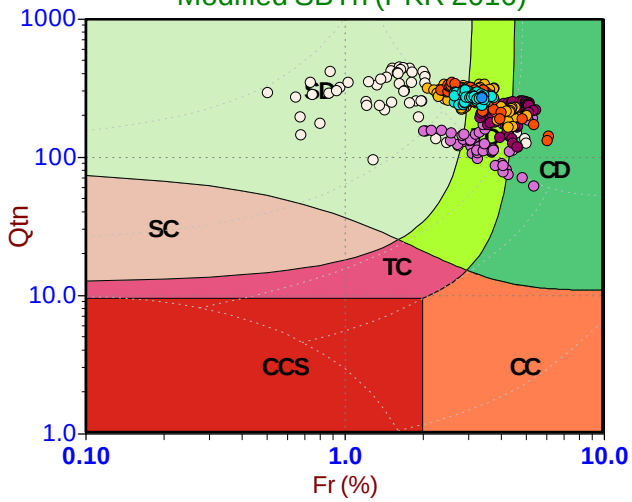

Standard SBT Chart (UBC 1986)

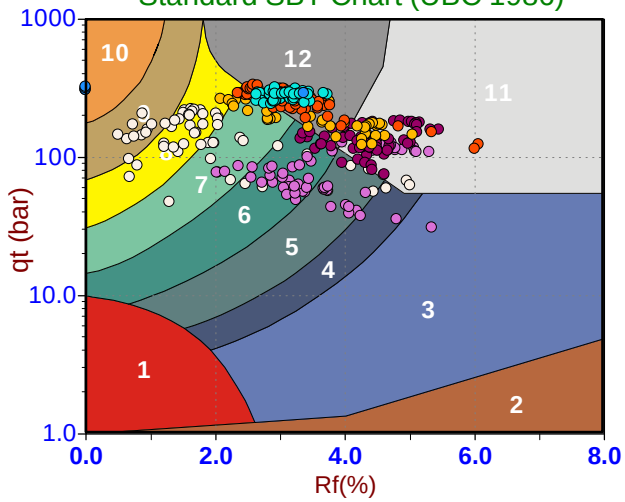

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-26 09:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT231
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

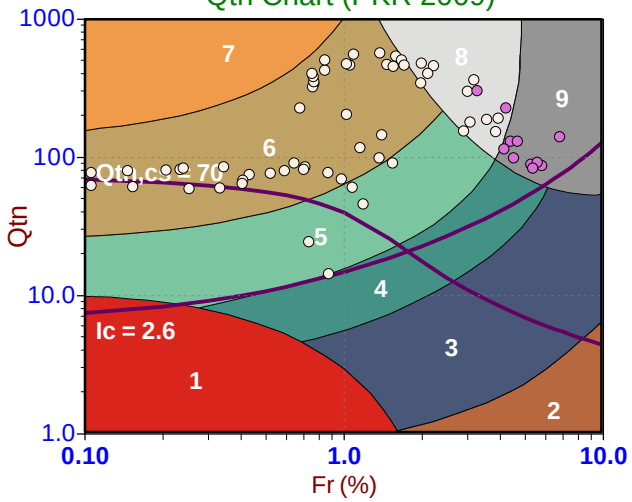

Modified SBTn (PKR 2016)

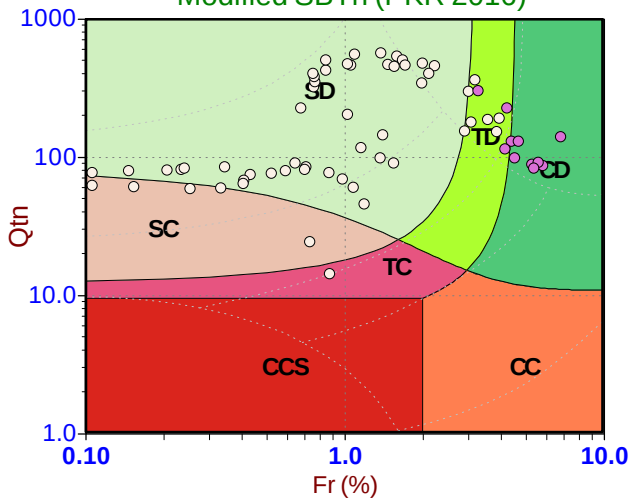

Standard SBT Chart (UBC 1986)

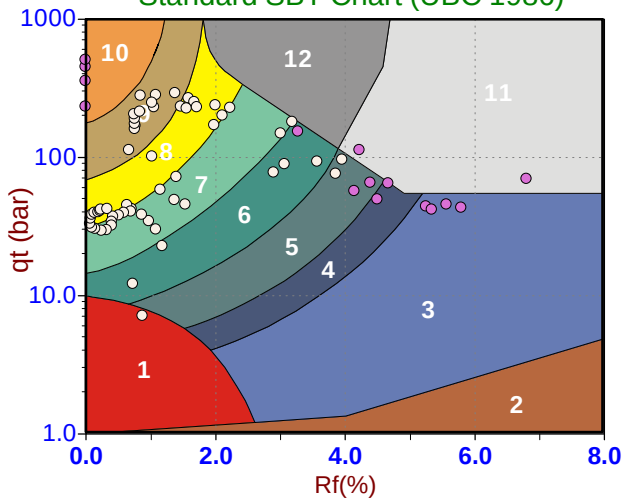

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-26 09:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT231A
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

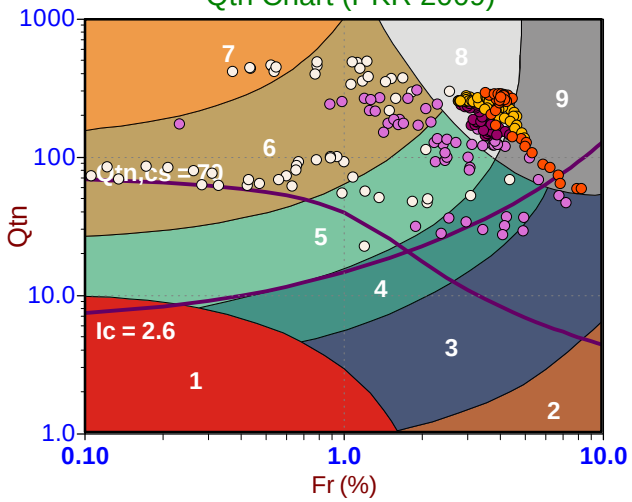

Modified SBTn (PKR 2016)

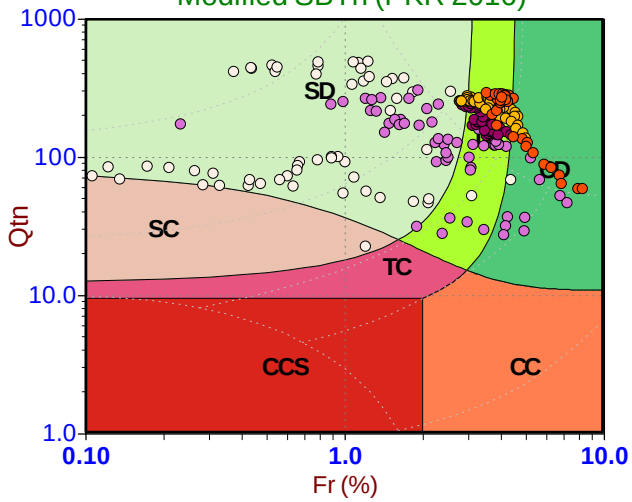

Standard SBT Chart (UBC 1986)

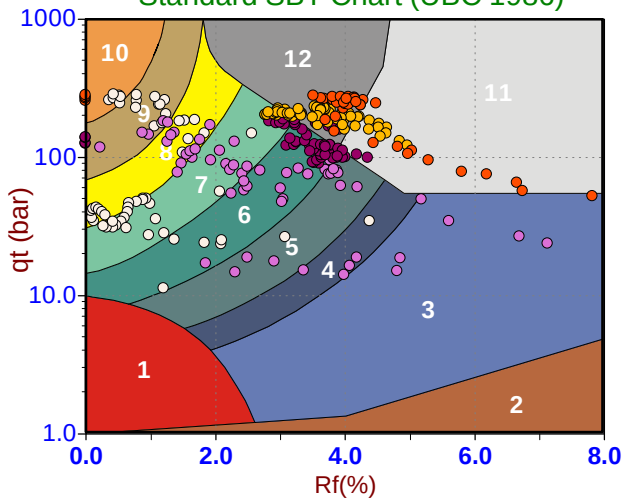

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-26 10:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT232
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

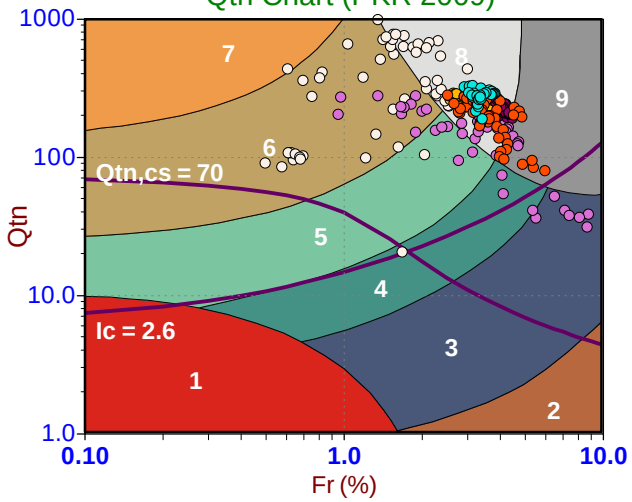

Modified SBTn (PKR 2016)

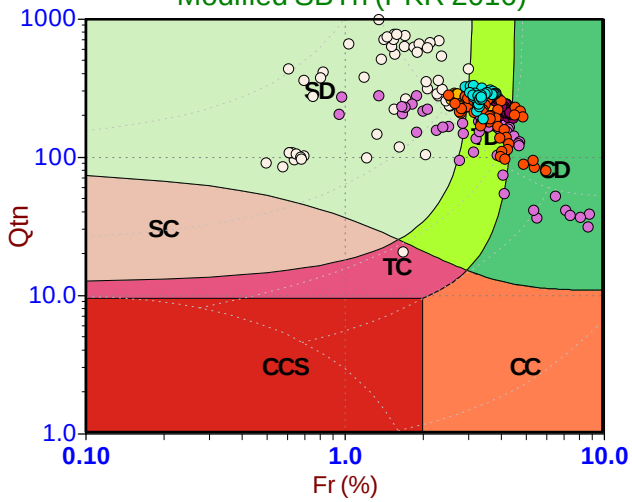

Standard SBT Chart (UBC 1986)

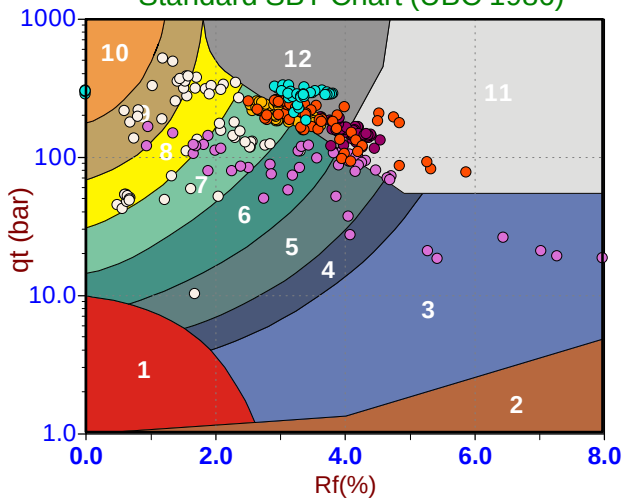

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-26 12:15
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT233
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

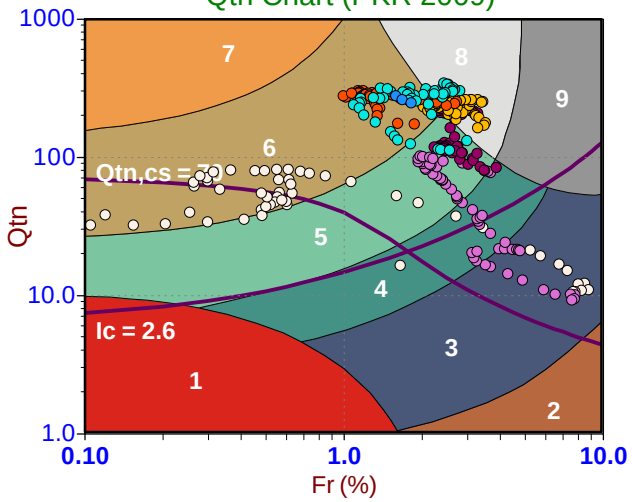

Modified SBTn (PKR 2016)

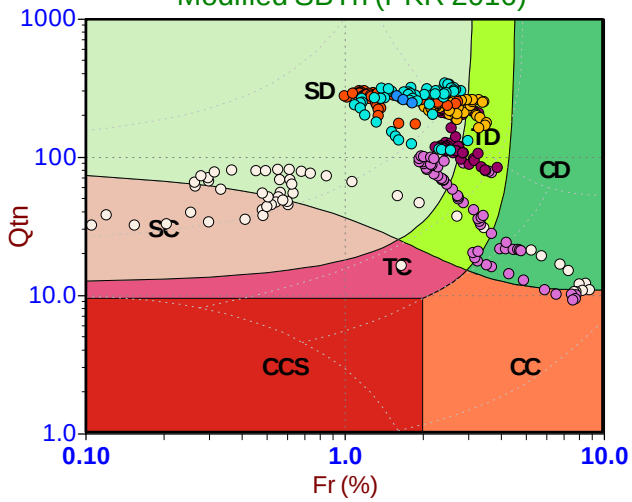

Standard SBT Chart (UBC 1986)

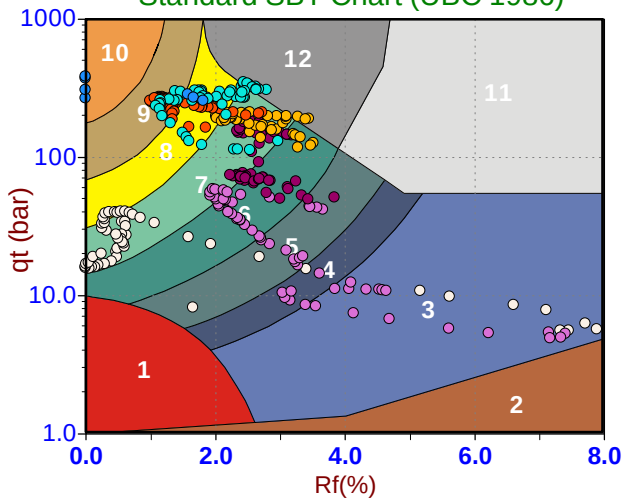

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-26 13:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT234
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

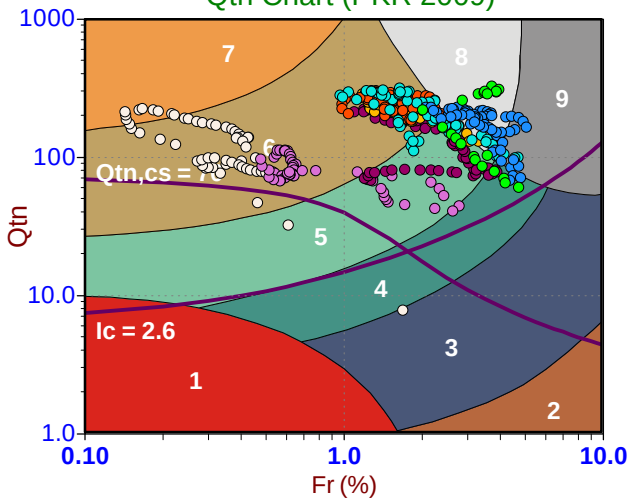

Modified SBTn (PKR 2016)

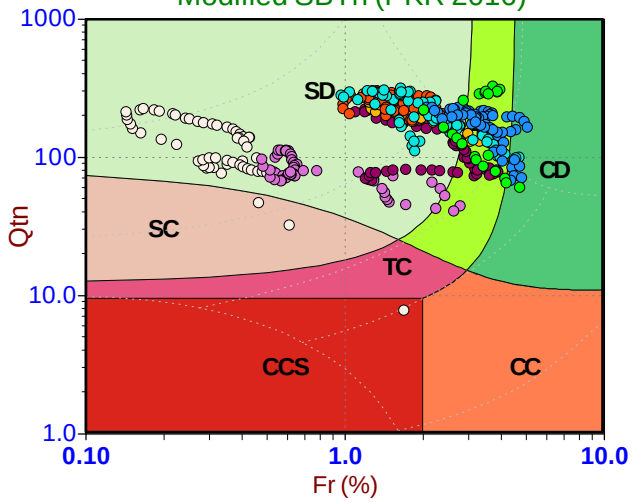

Standard SBT Chart (UBC 1986)

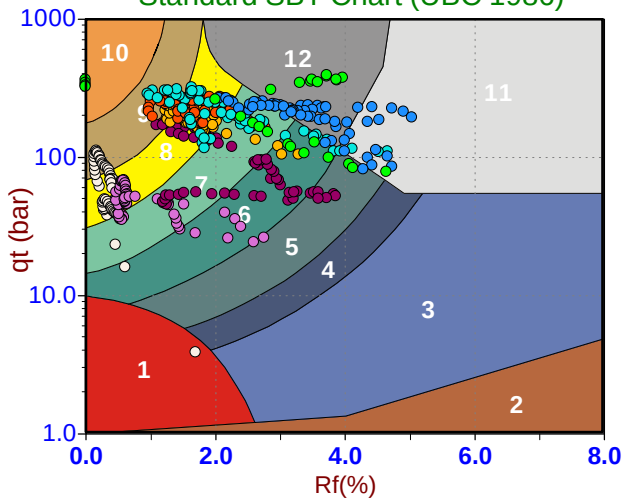

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-26 14:42
Site: Brooks, Alberta

Sounding: RCPT22-22CPT235
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

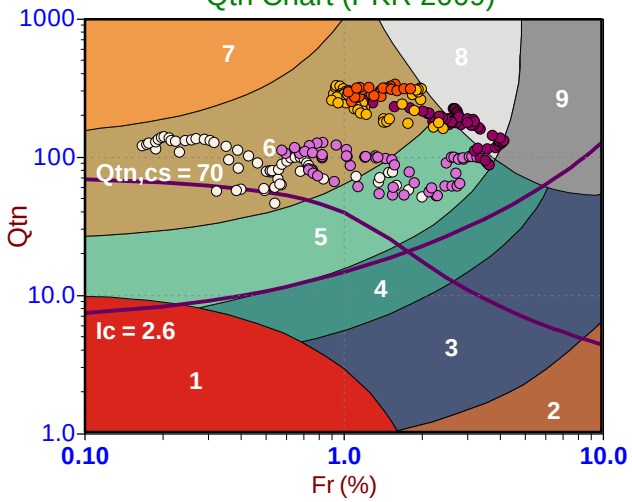

Modified SBTn (PKR 2016)

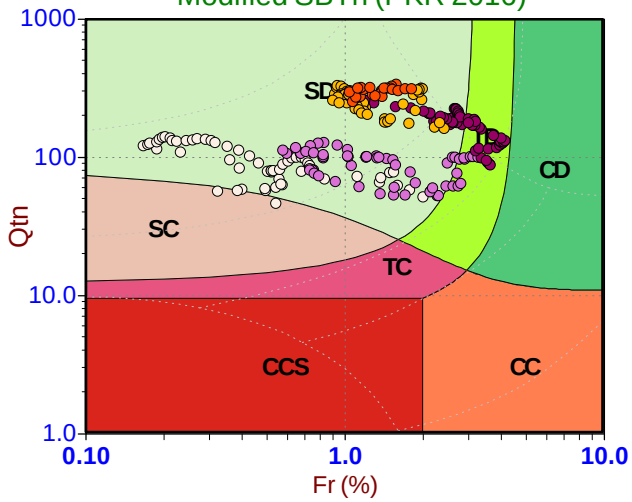

Standard SBT Chart (UBC 1986)

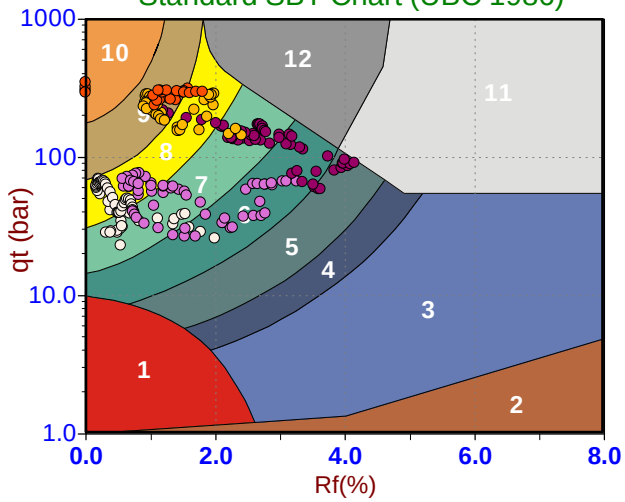

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-26 15:41
Site: Brooks, Alberta

Sounding: RCPT22-22CPT236
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

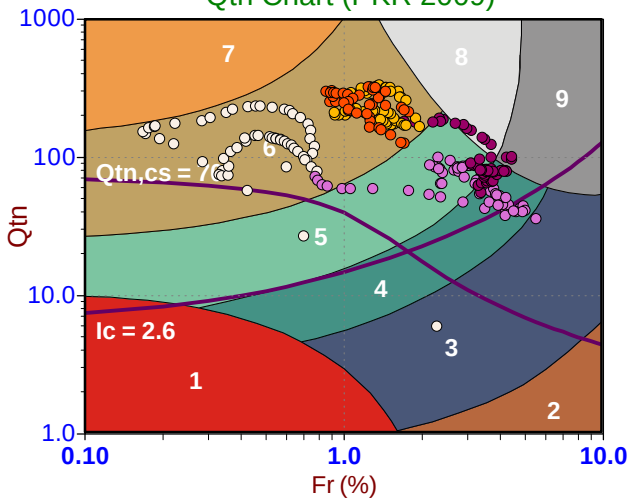

Modified SBTn (PKR 2016)

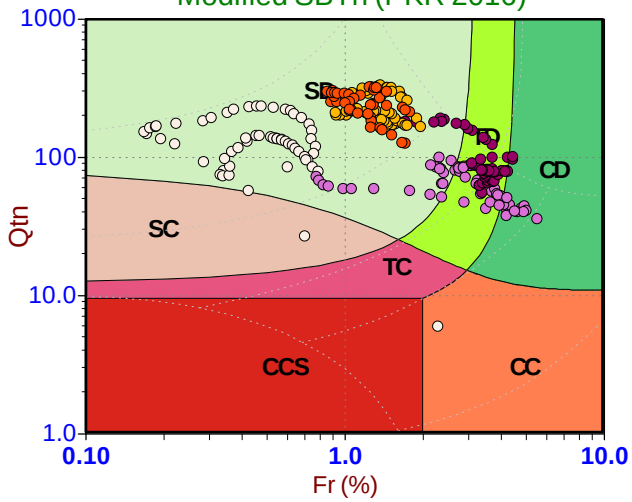

Standard SBT Chart (UBC 1986)

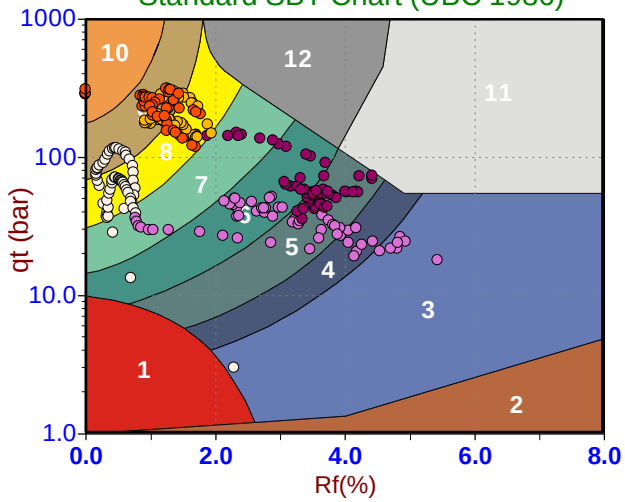

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-26 16:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT237
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

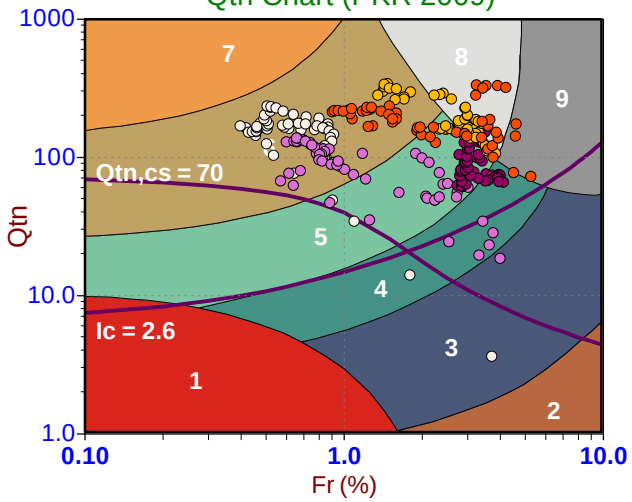

Modified SBTn (PKR 2016)

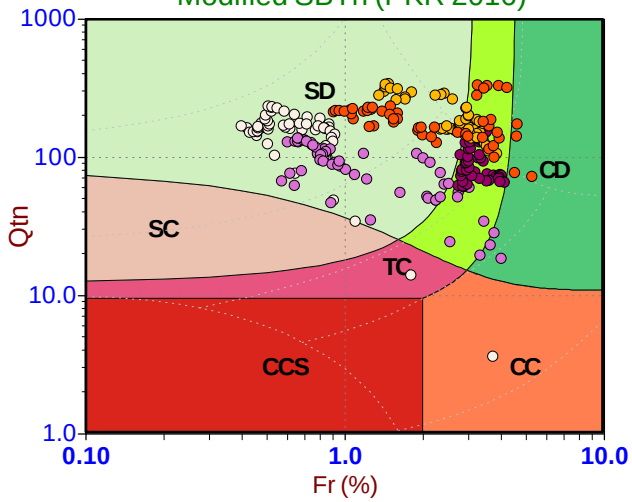

Standard SBT Chart (UBC 1986)

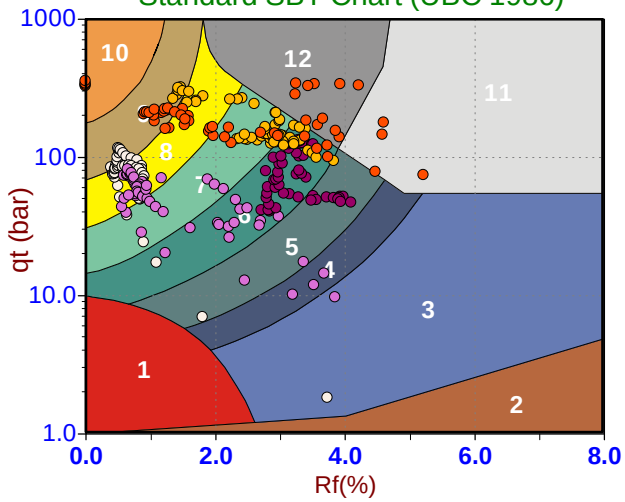

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-27 07:15
Site: Brooks, Alberta

Sounding: RCPT22-22CPT238
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

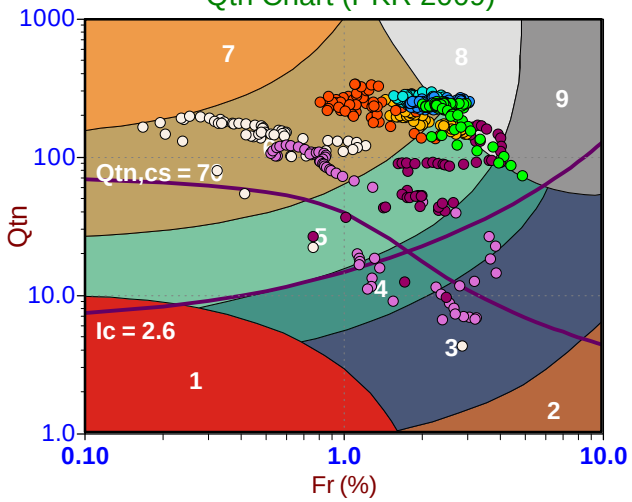

Modified SBTn (PKR 2016)

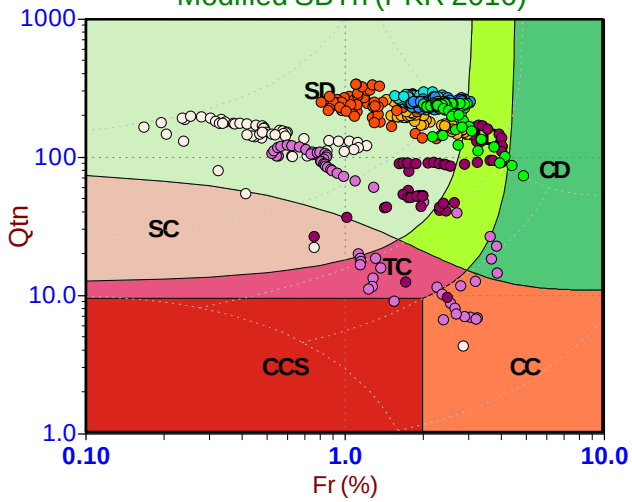

Standard SBT Chart (UBC 1986)

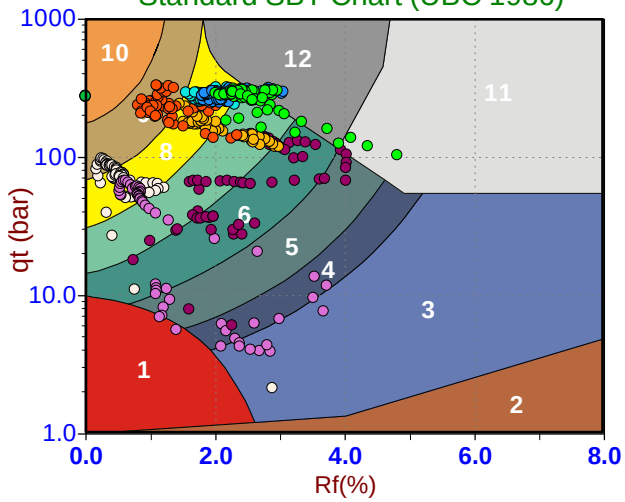

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-27 08:41
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT239
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

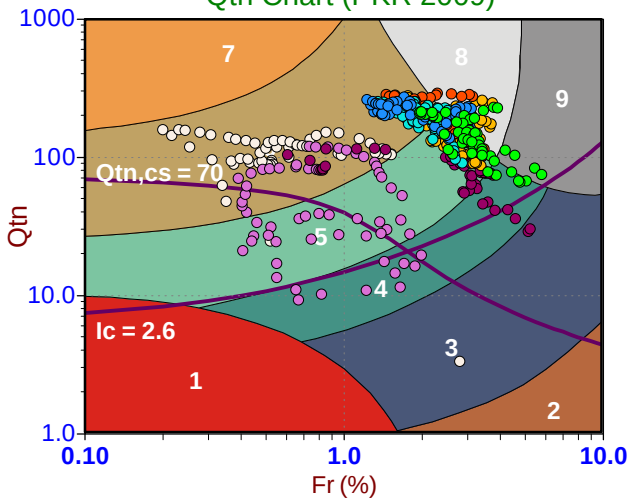

Modified SBTn (PKR 2016)

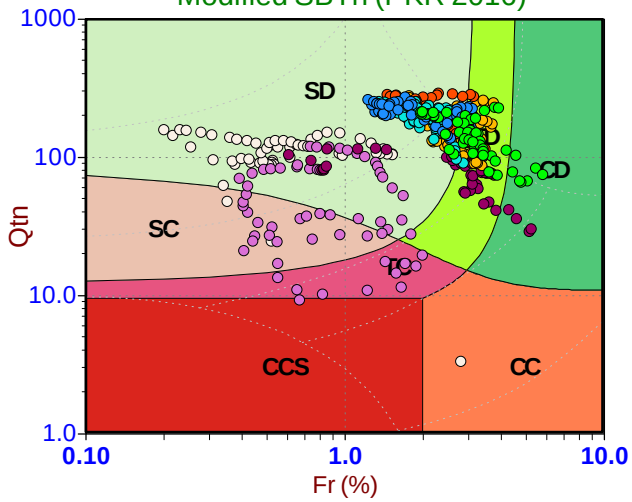

Standard SBT Chart (UBC 1986)

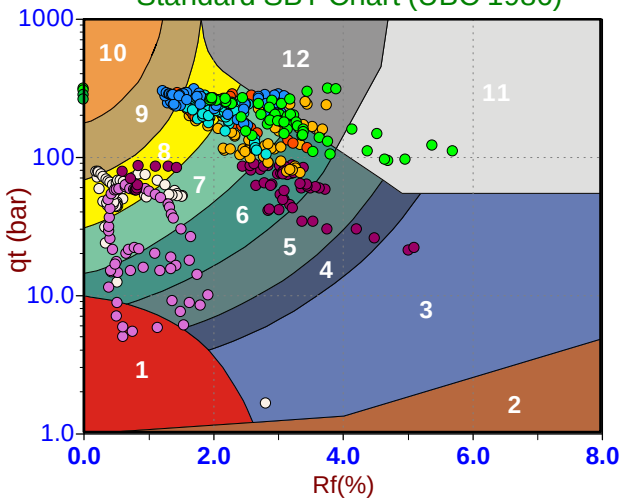

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-27 09:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT240
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

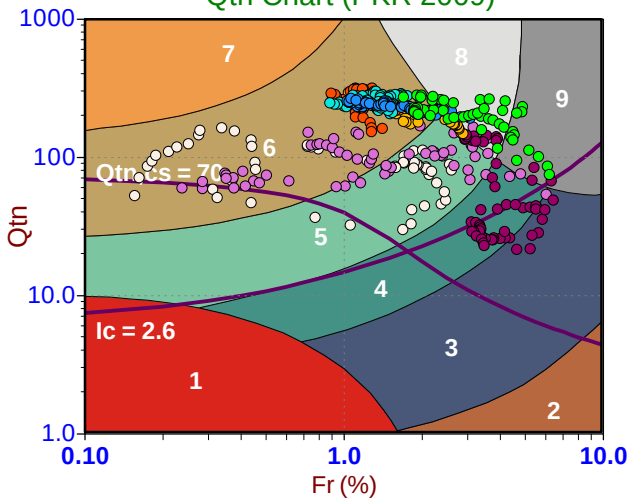

Modified SBTn (PKR 2016)

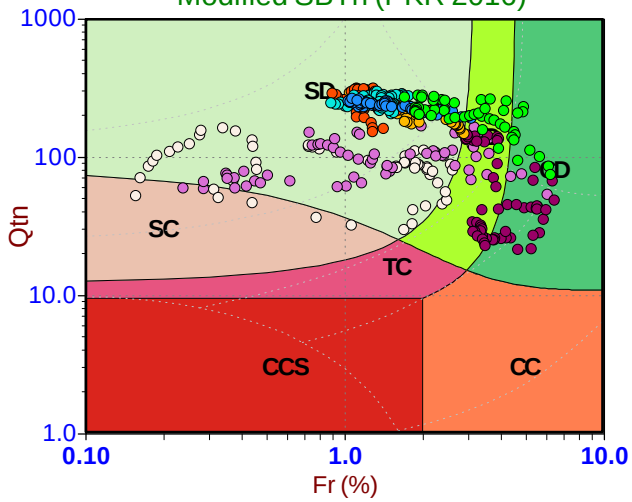

Standard SBT Chart (UBC 1986)

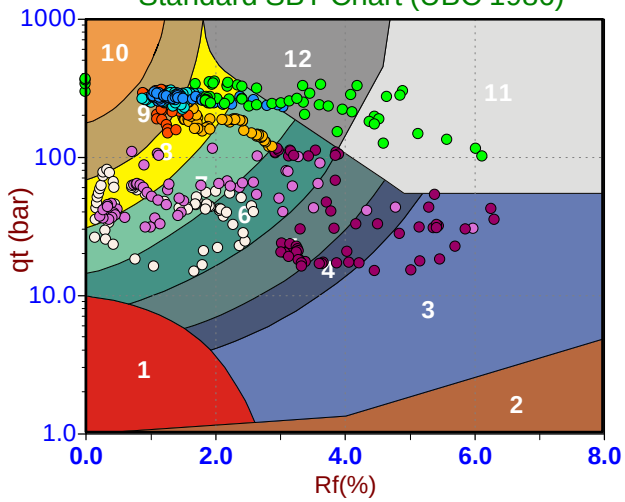

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-27 11:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT241
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

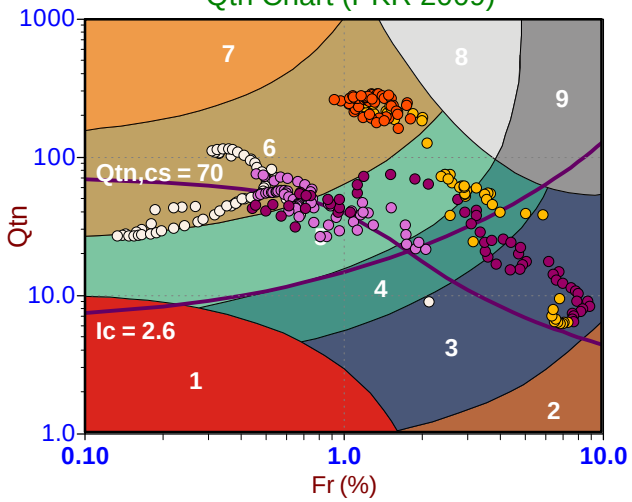

Modified SBTn (PKR 2016)

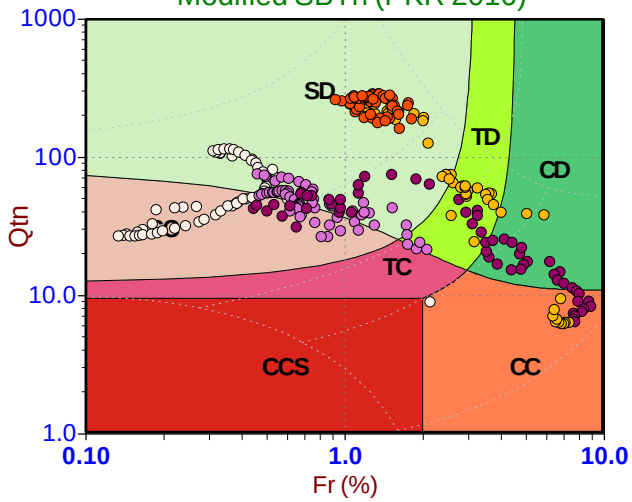

Standard SBT Chart (UBC 1986)

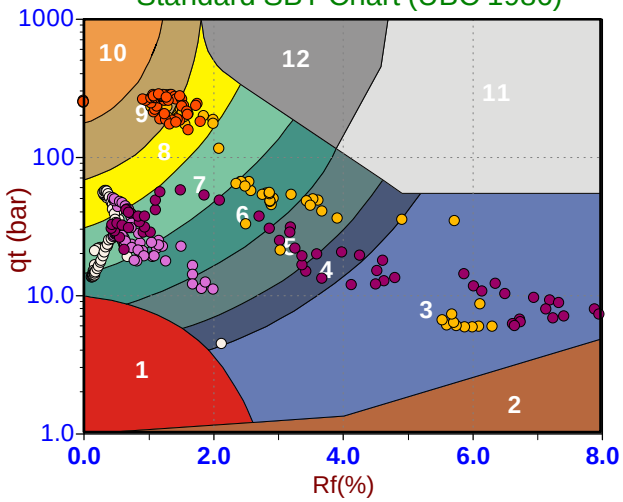

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-27 12:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT242
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

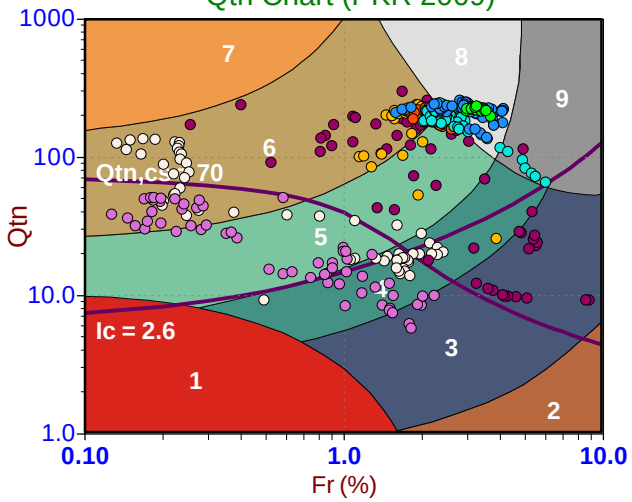

Modified SBTn (PKR 2016)

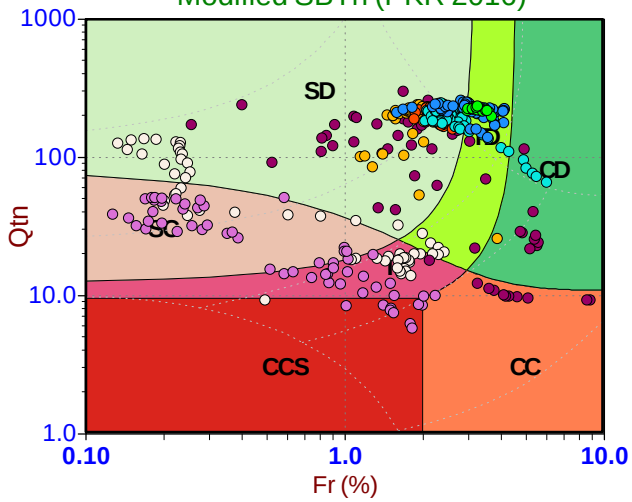

Standard SBT Chart (UBC 1986)

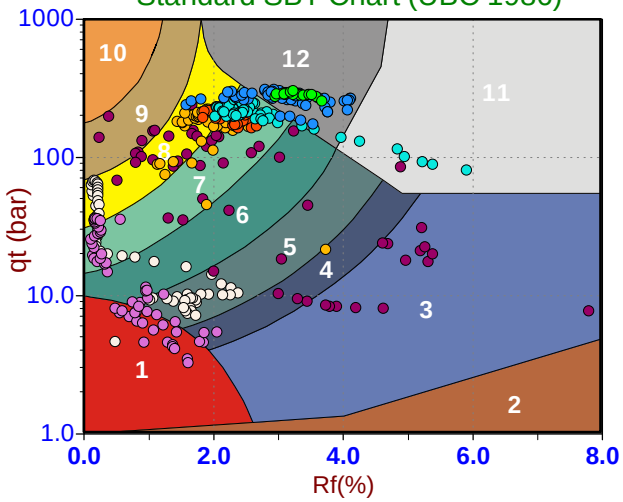

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-27 13:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT243
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

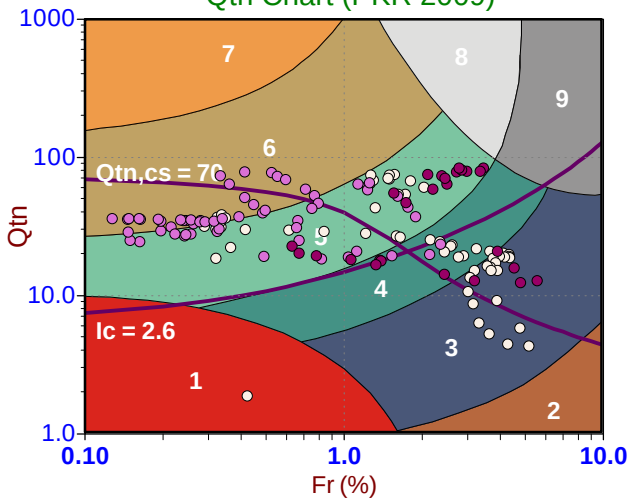

Modified SBTn (PKR 2016)

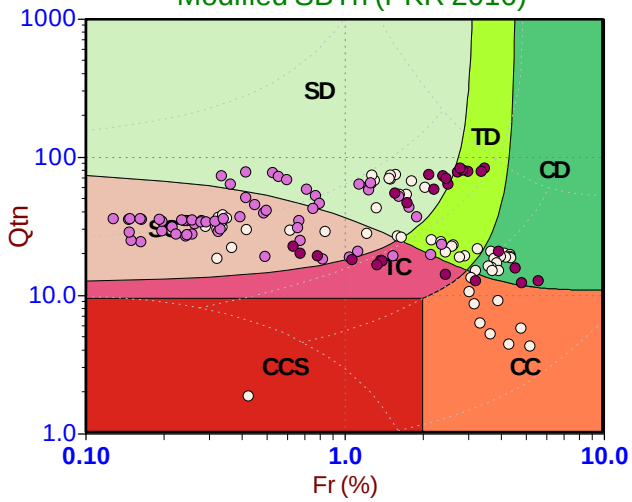

Standard SBT Chart (UBC 1986)

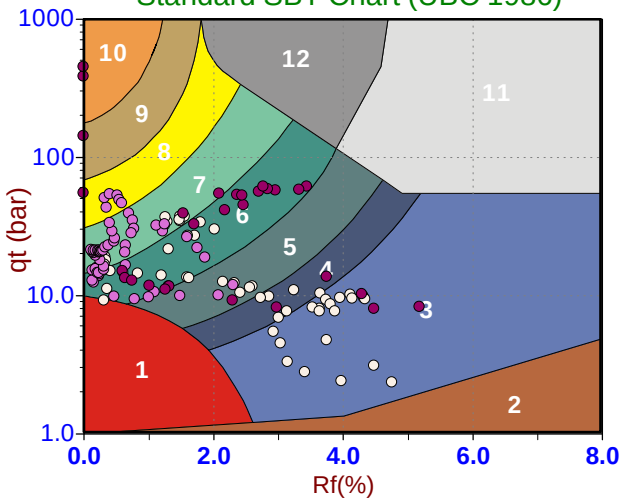

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-27 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT243A
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

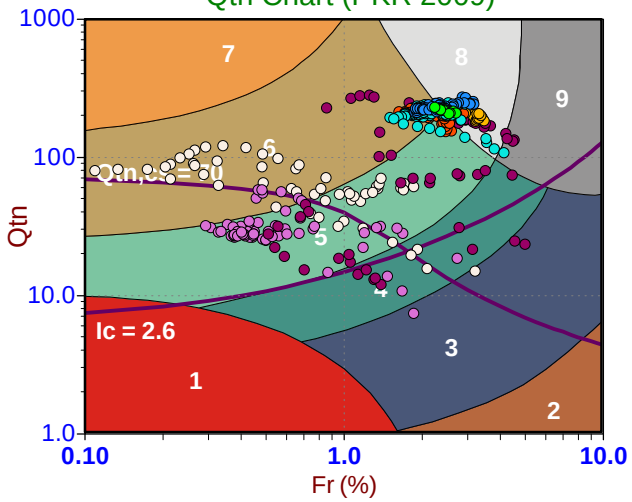

Modified SBTn (PKR 2016)

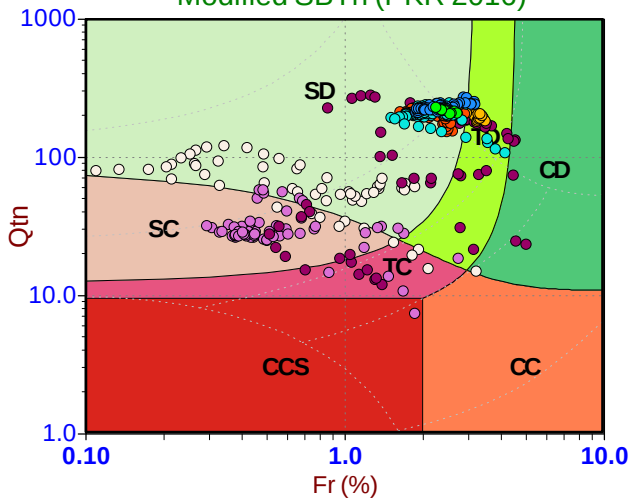

Standard SBT Chart (UBC 1986)

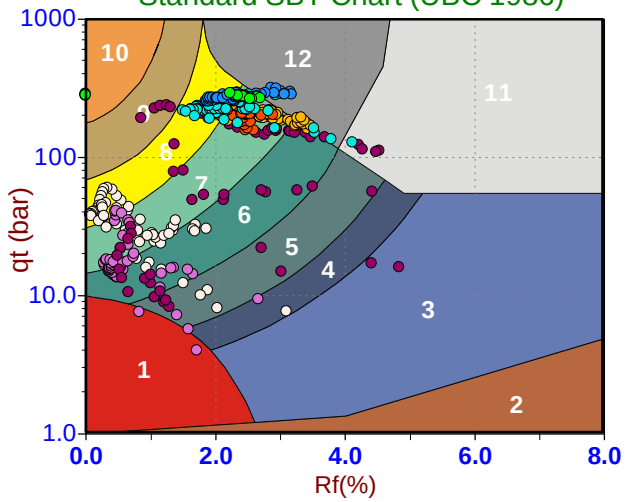

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-27 15:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT244
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

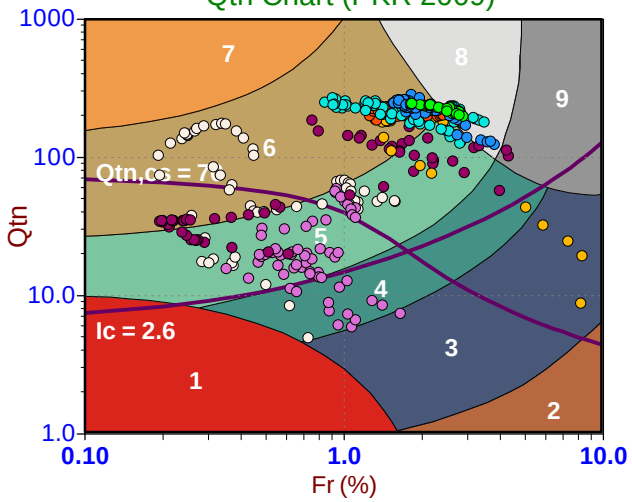

Modified SBTn (PKR 2016)

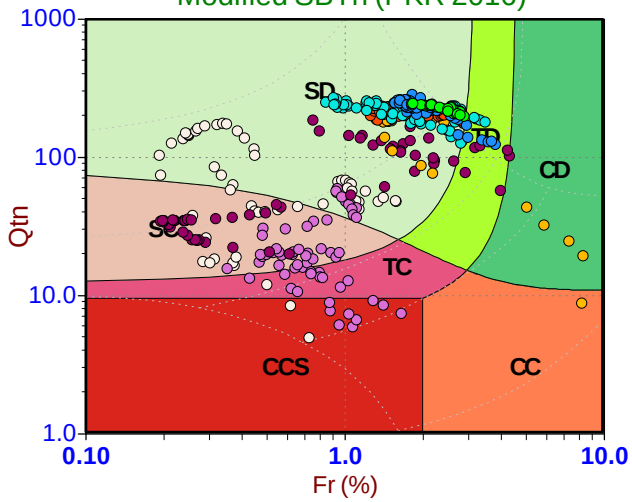

Standard SBT Chart (UBC 1986)

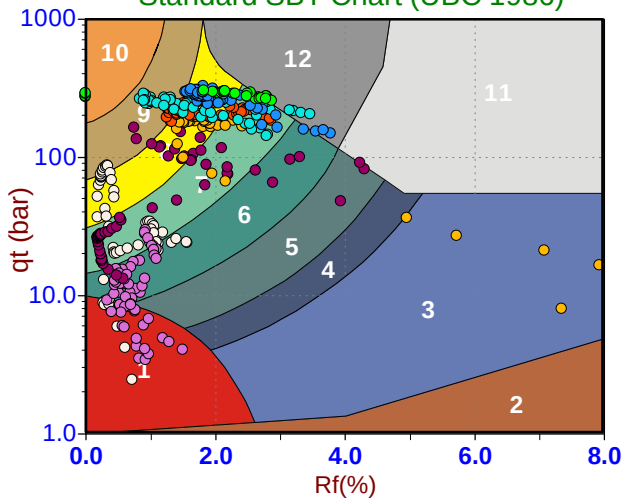

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-27 17:12
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT245
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

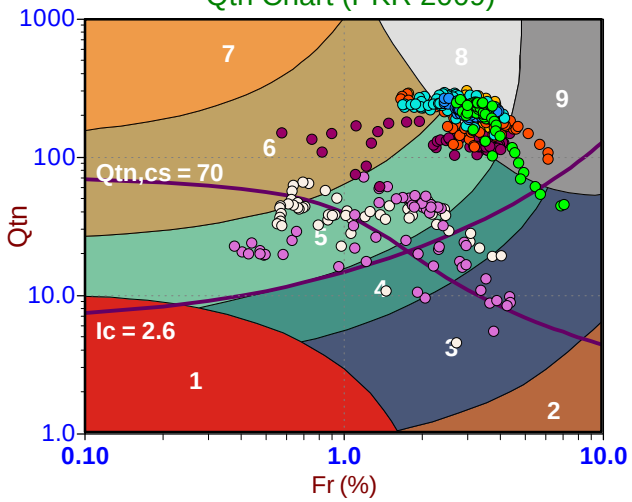

Modified SBTn (PKR 2016)

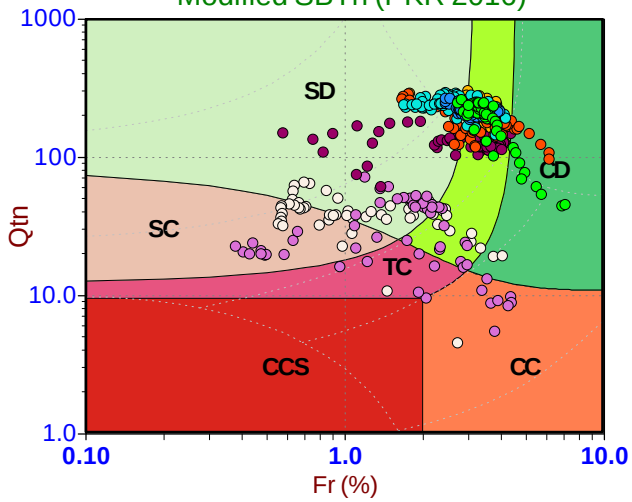

Standard SBT Chart (UBC 1986)

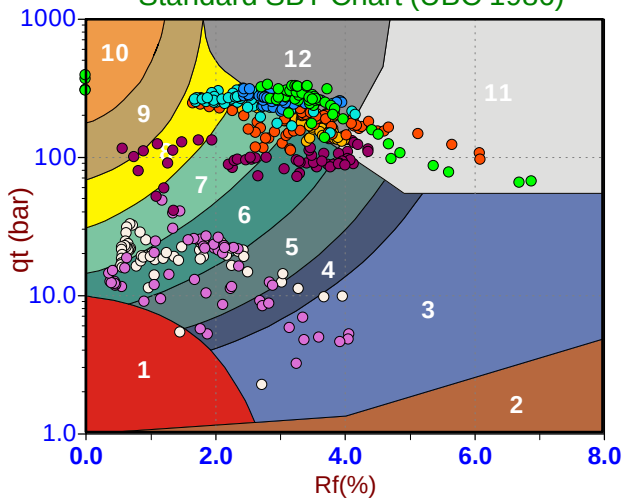

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-01 13:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT246
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

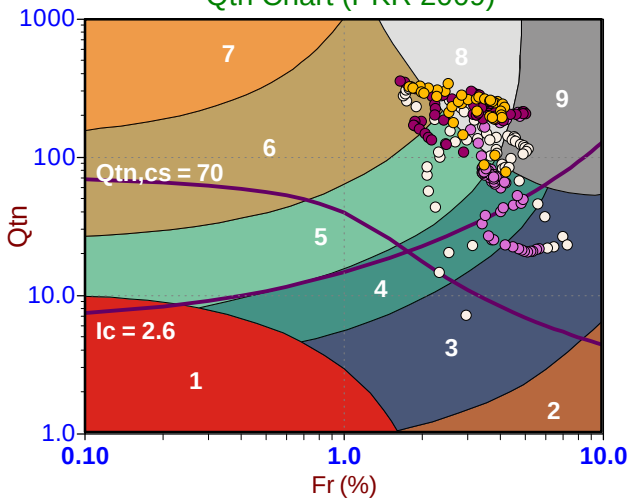

Modified SBTn (PKR 2016)

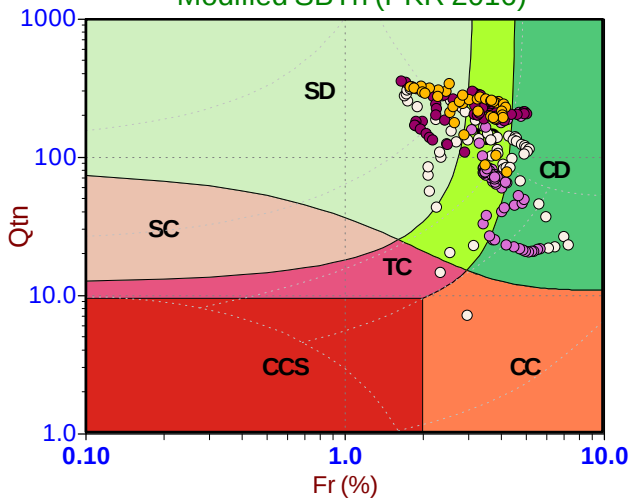

Standard SBT Chart (UBC 1986)

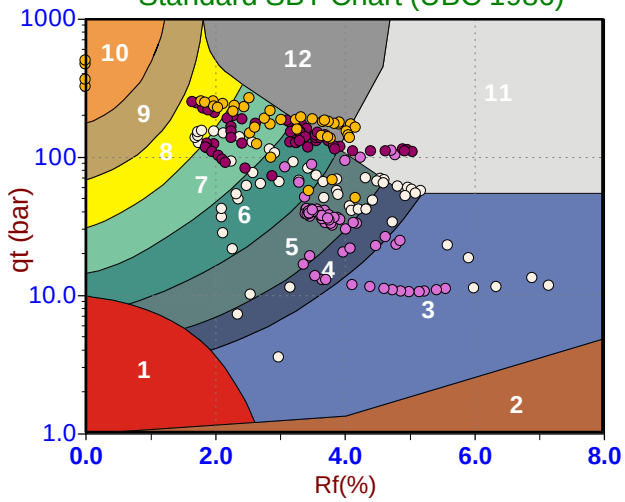

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-02 06:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT247
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

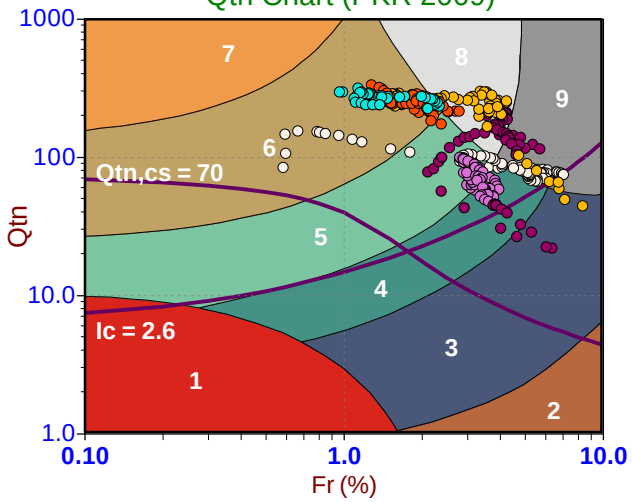

Modified SBTn (PKR 2016)

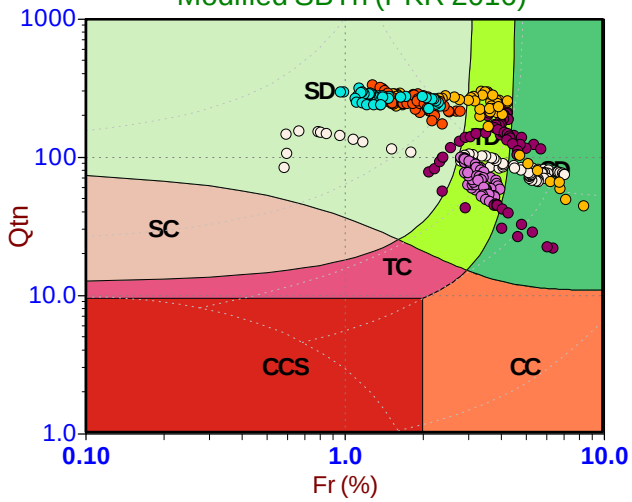

Standard SBT Chart (UBC 1986)

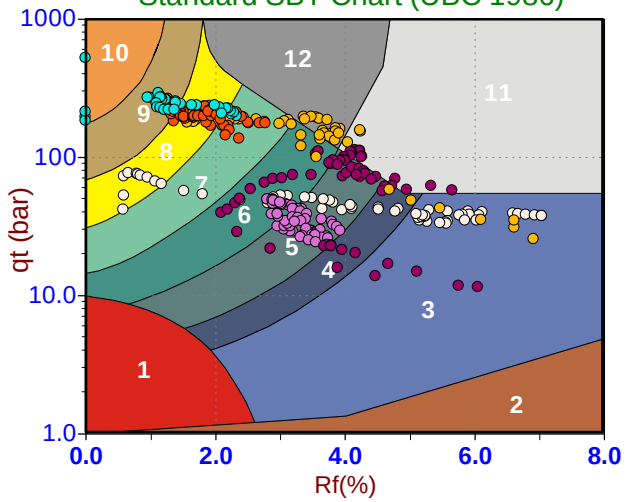

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-02 08:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT248
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

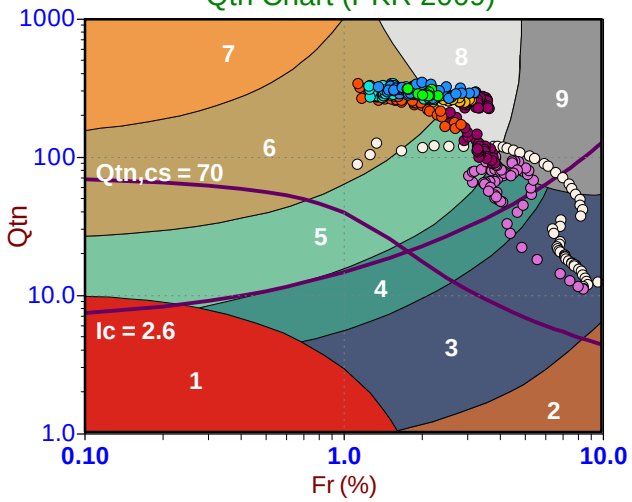

Modified SBTn (PKR 2016)

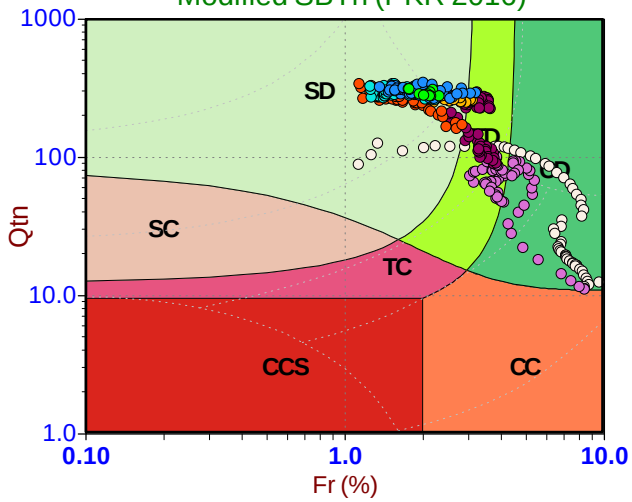

Standard SBT Chart (UBC 1986)

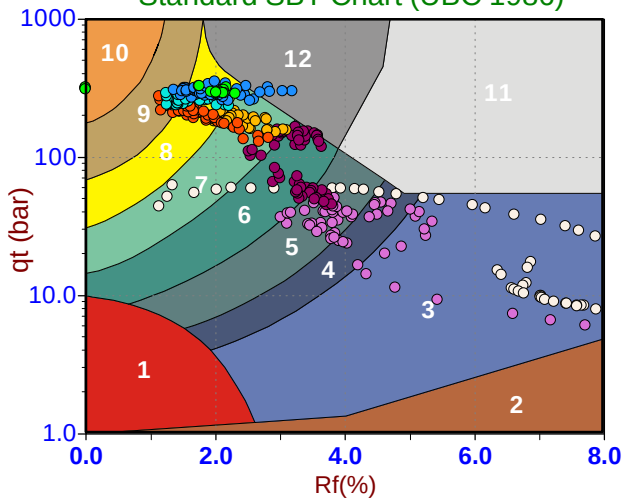

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-02 11:28
Site: Brooks, Alberta

Sounding: RCPT22-22CPT249
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

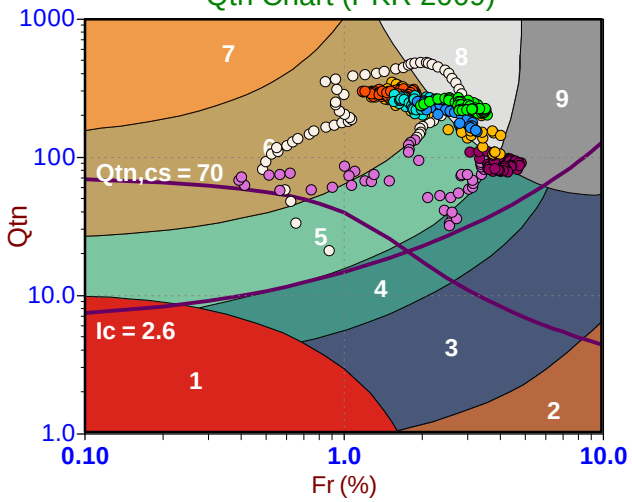

Modified SBTn (PKR 2016)

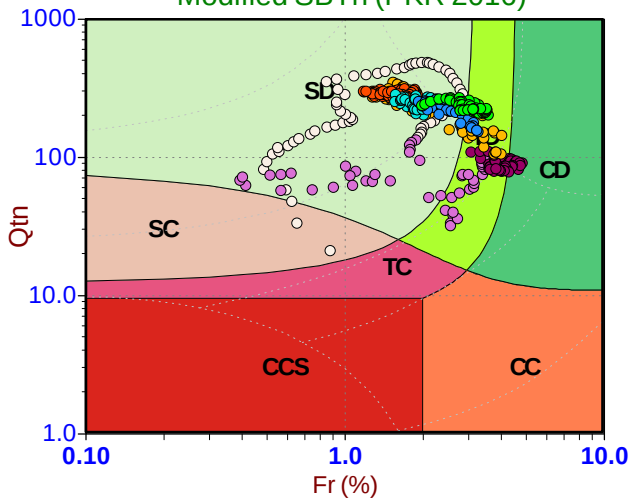

Standard SBT Chart (UBC 1986)

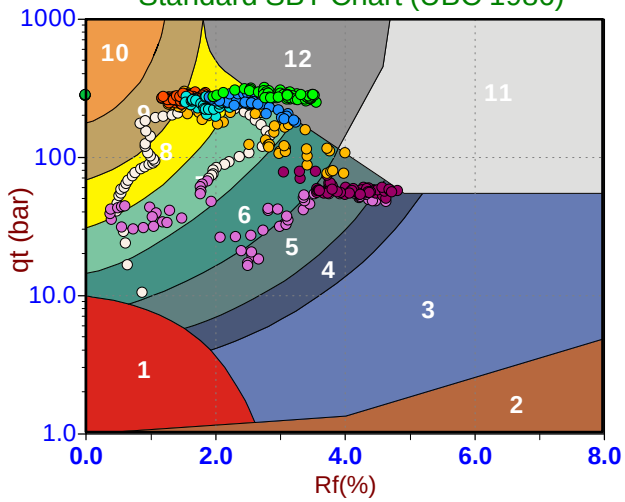

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-02 12:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT250
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

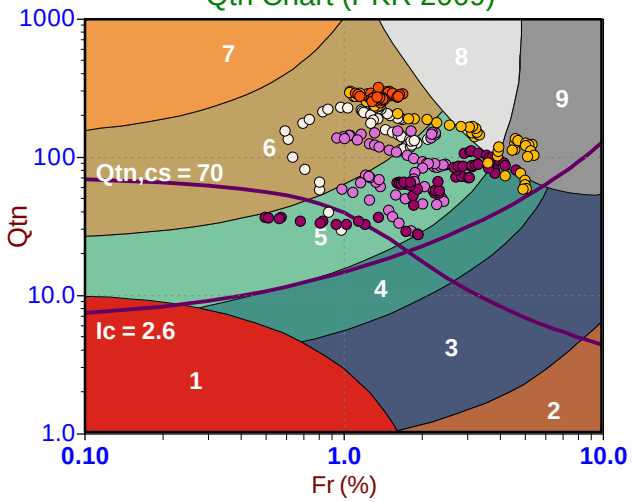

Modified SBTn (PKR 2016)

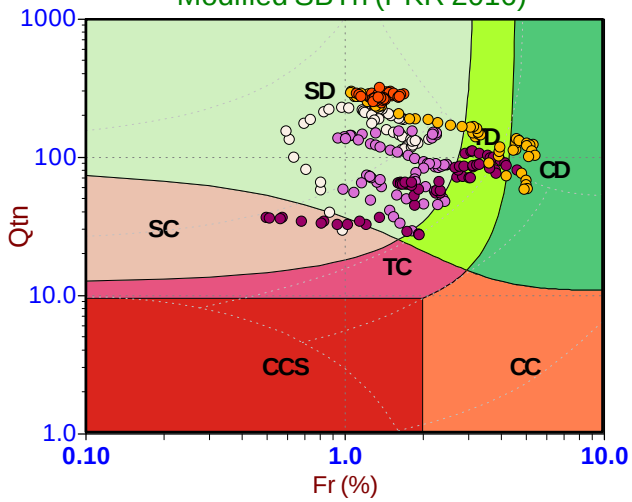

Standard SBT Chart (UBC 1986)

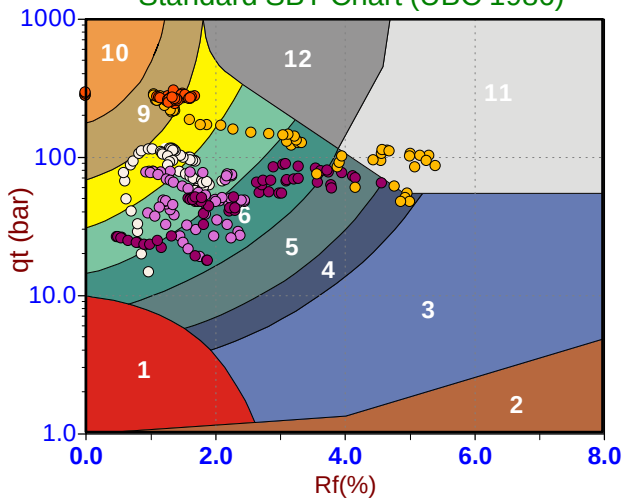

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-02 13:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT251
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

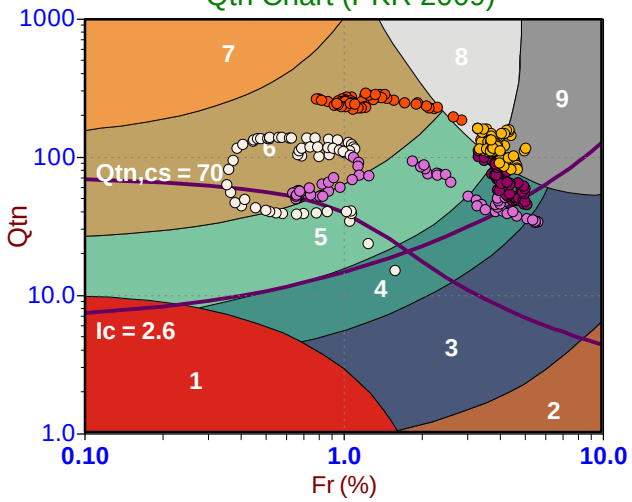

Modified SBTn (PKR 2016)

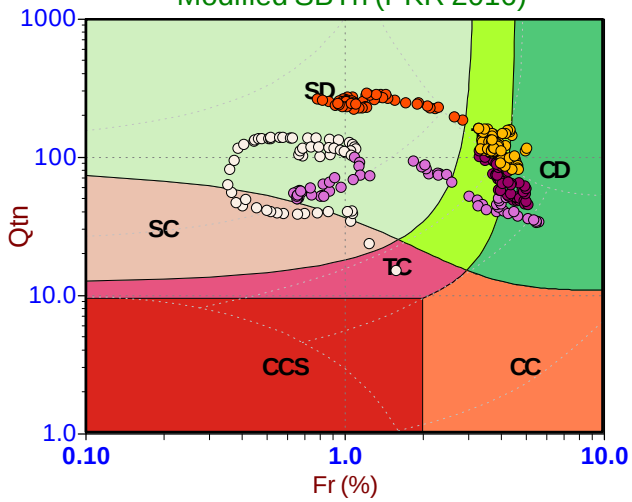

Standard SBT Chart (UBC 1986)

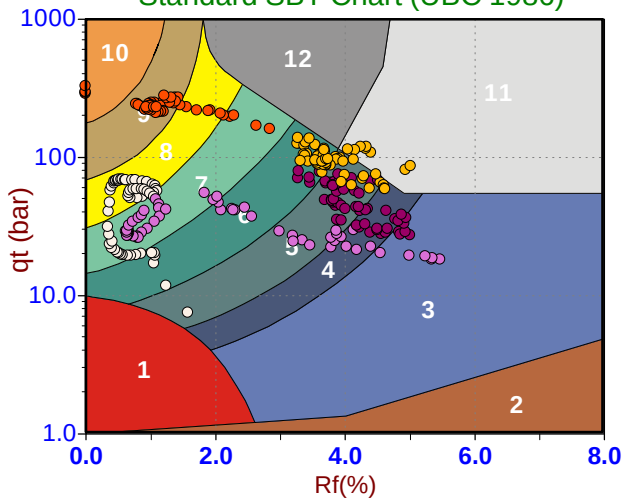

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-02 15:05
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT252
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

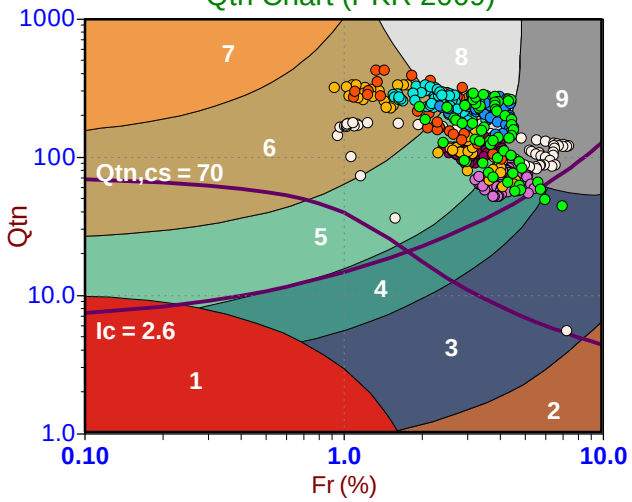

Modified SBTn (PKR 2016)

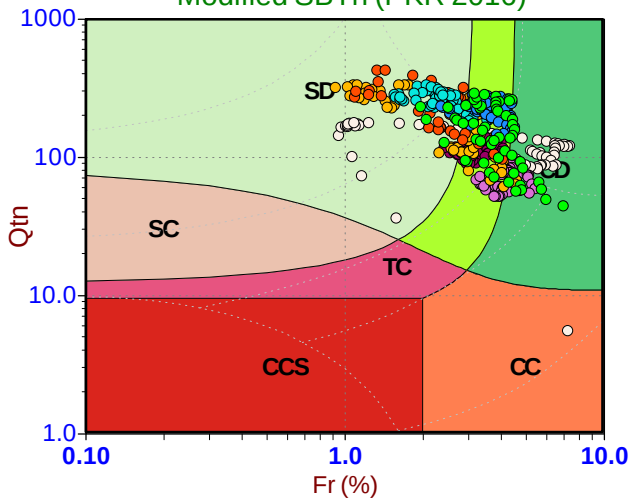

Standard SBT Chart (UBC 1986)

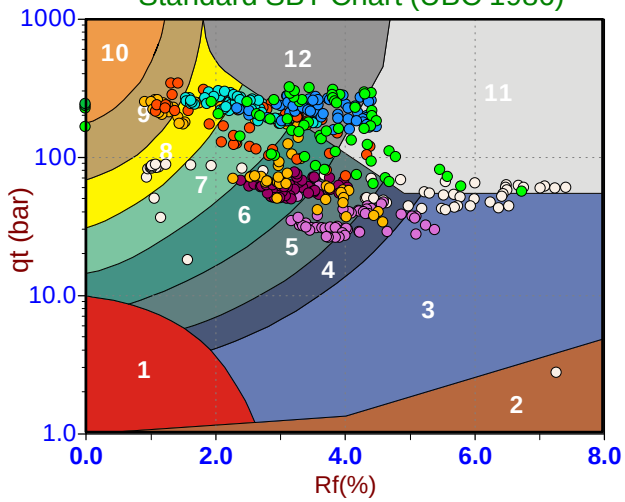

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-04 11:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT254
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

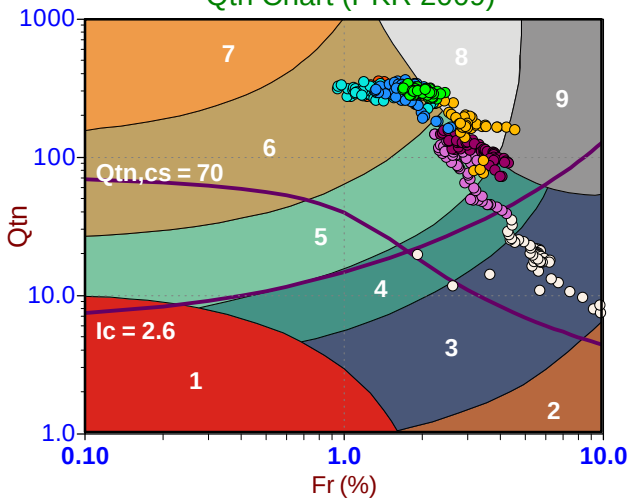

Modified SBTn (PKR 2016)

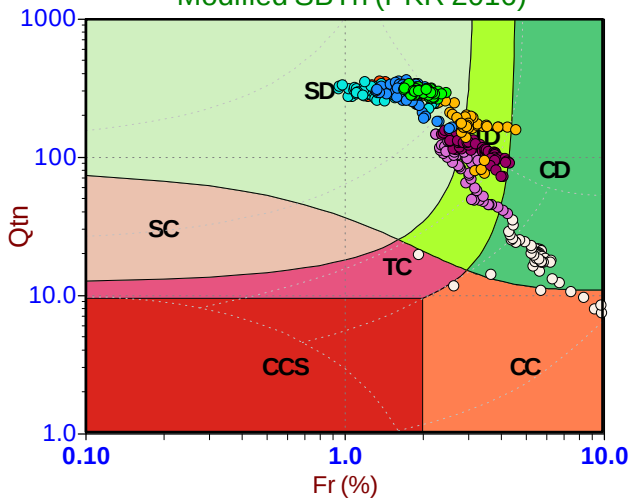

Standard SBT Chart (UBC 1986)

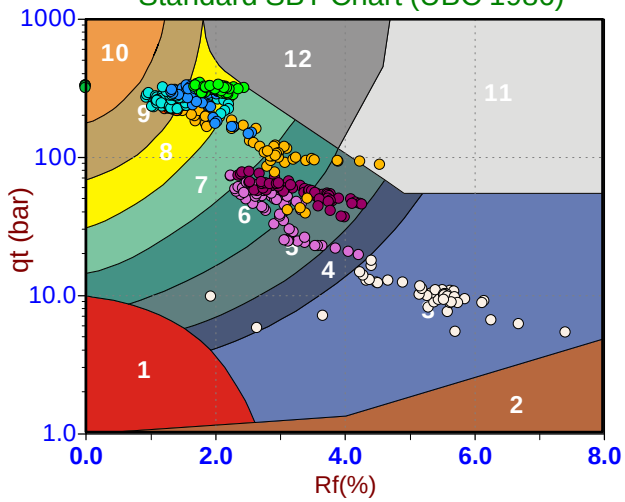

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-04 07:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT253
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

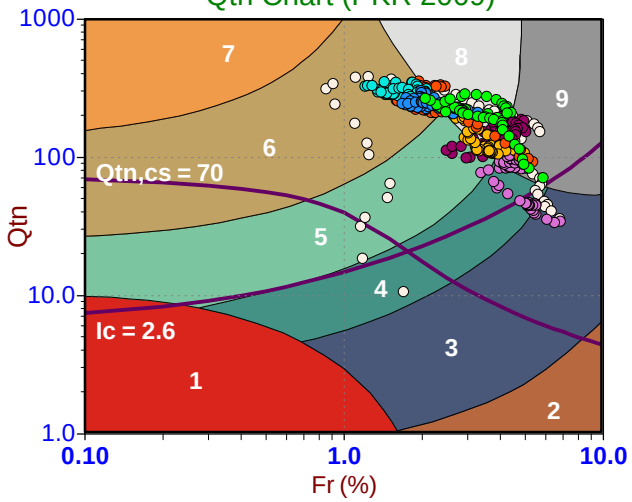

Modified SBTn (PKR 2016)

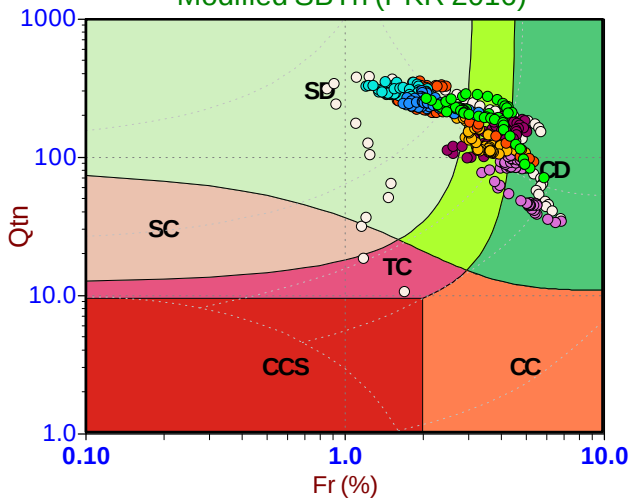

Standard SBT Chart (UBC 1986)

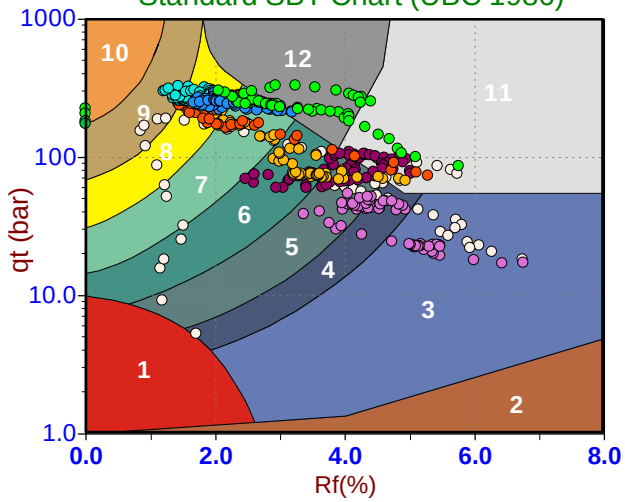

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-04 12:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT255
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

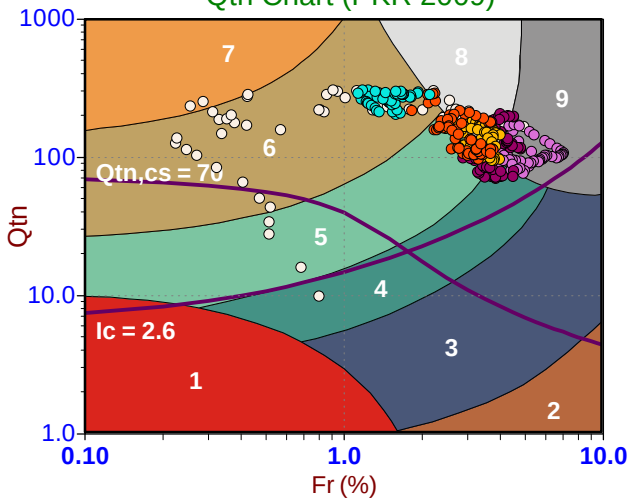

Modified SBTn (PKR 2016)

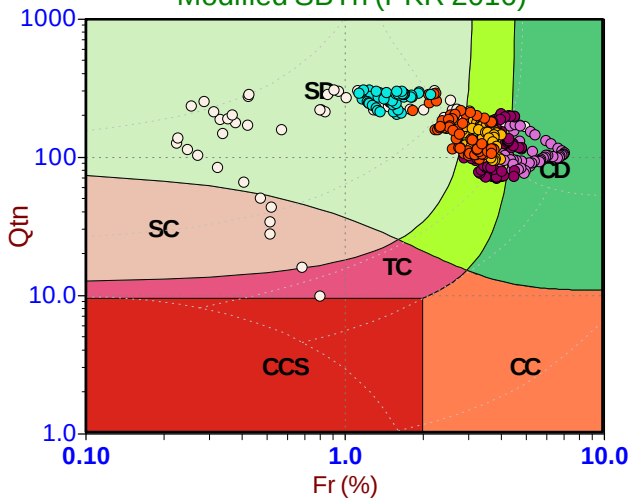

Standard SBT Chart (UBC 1986)

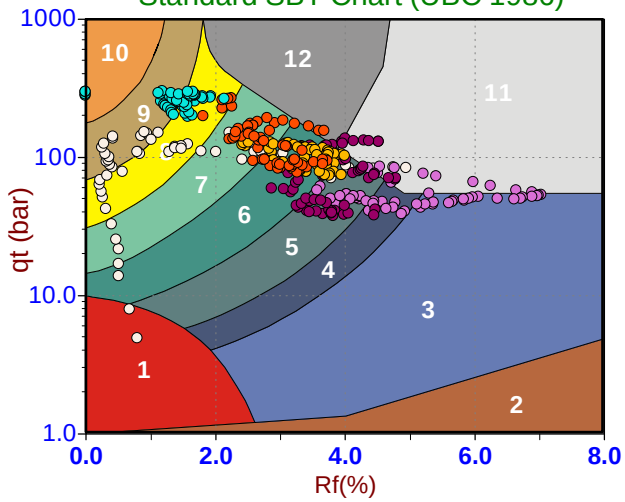

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-04 13:54
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT256
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

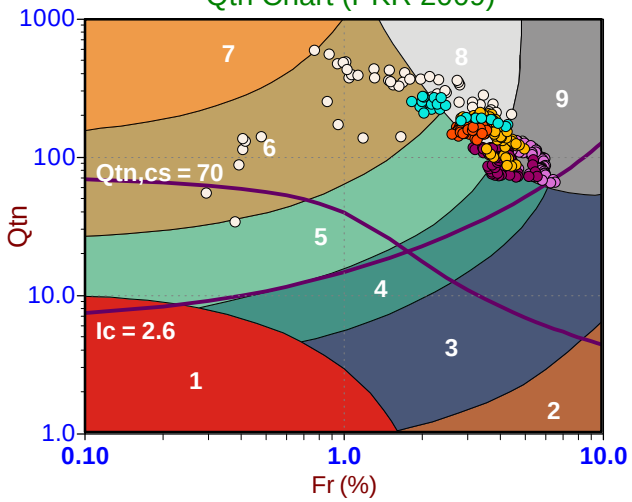

Modified SBTn (PKR 2016)

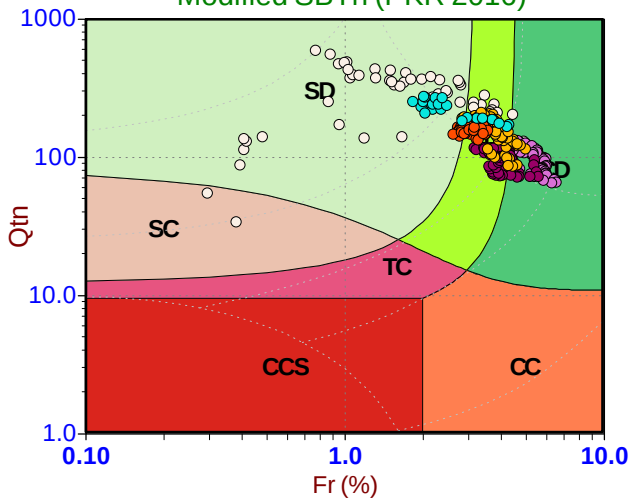

Standard SBT Chart (UBC 1986)

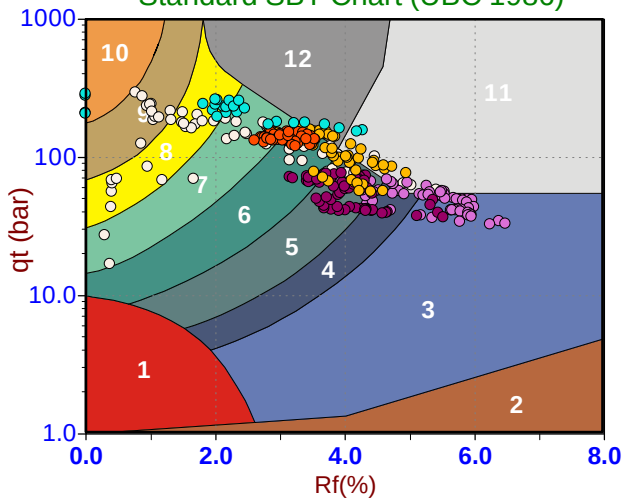

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-04 15:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT257
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

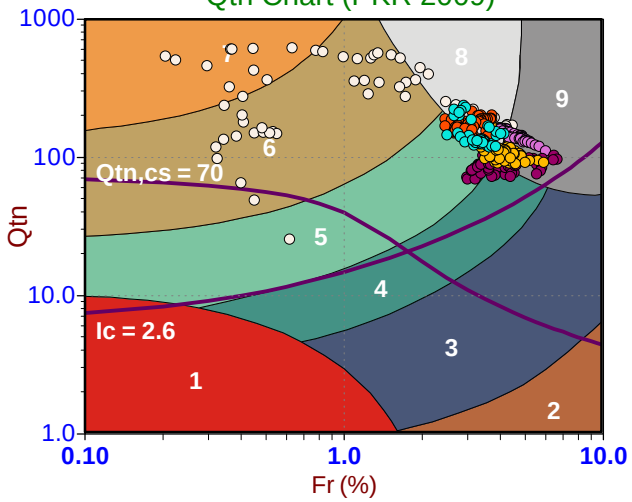

Modified SBTn (PKR 2016)

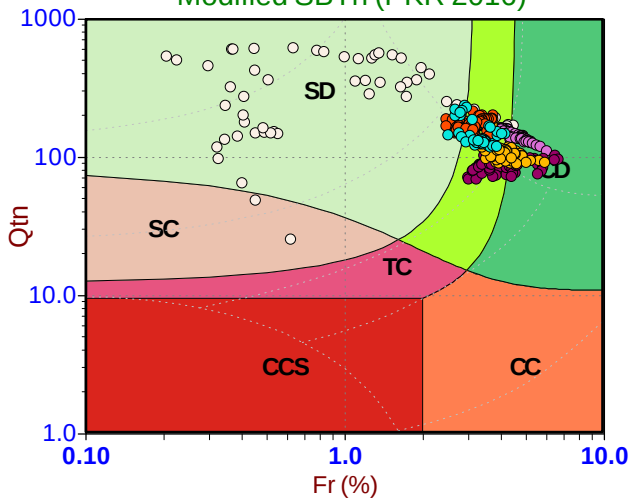

Standard SBT Chart (UBC 1986)

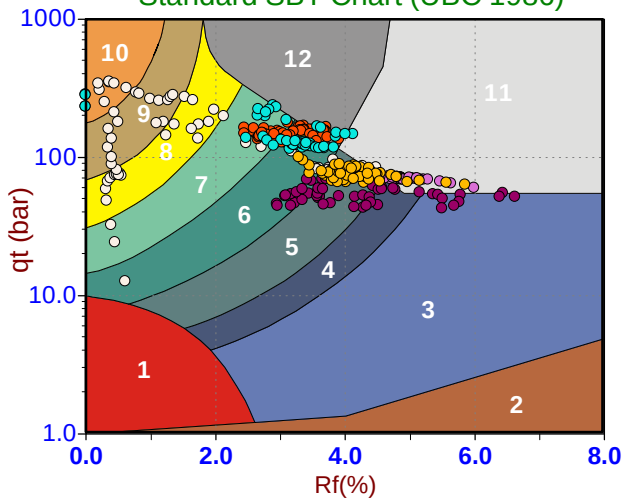

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-04 16:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT258
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

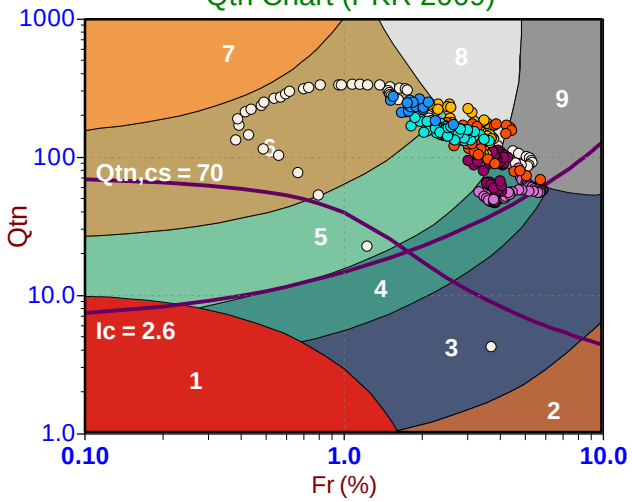

Modified SBTn (PKR 2016)

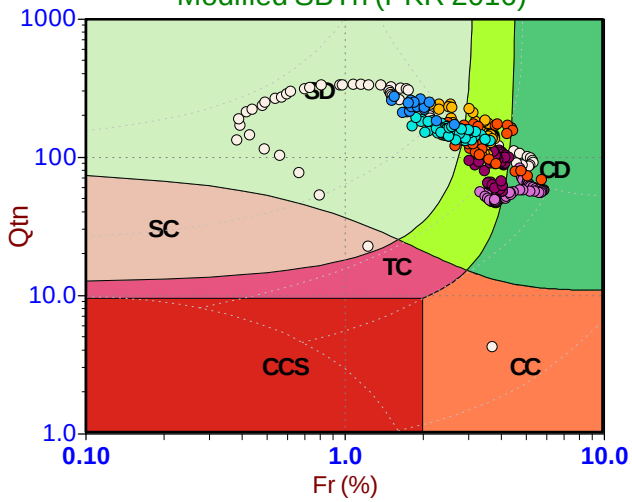

Standard SBT Chart (UBC 1986)

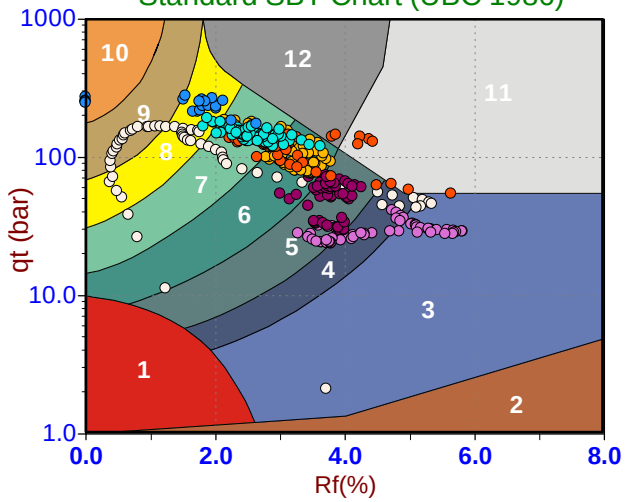

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-25 14:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT259
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

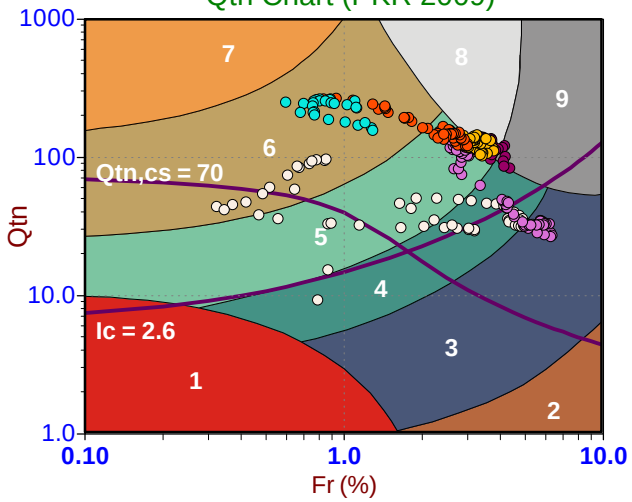

Modified SBTn (PKR 2016)

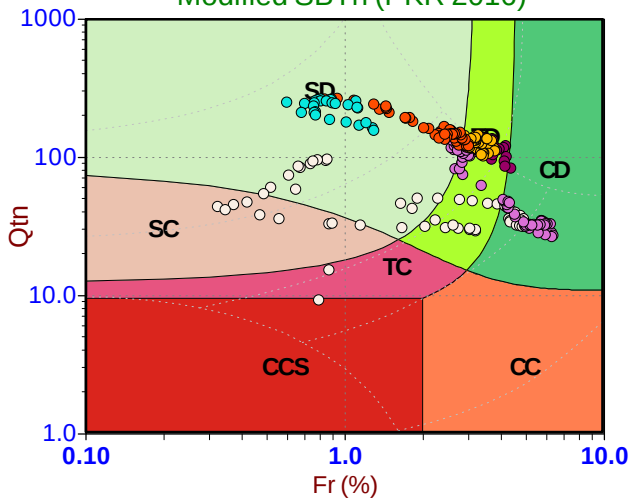

Standard SBT Chart (UBC 1986)

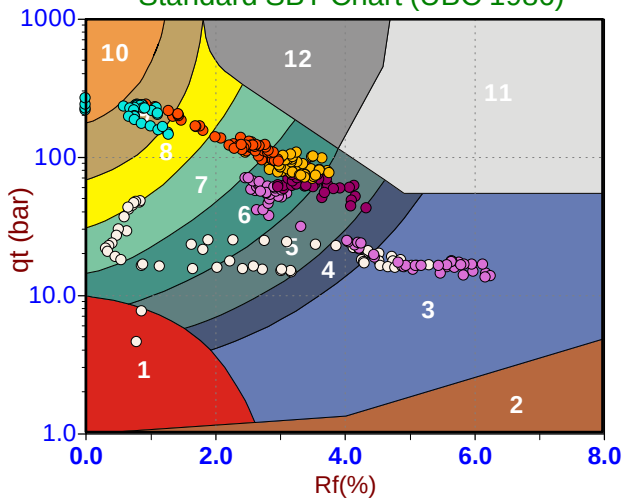

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-25 17:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT260
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

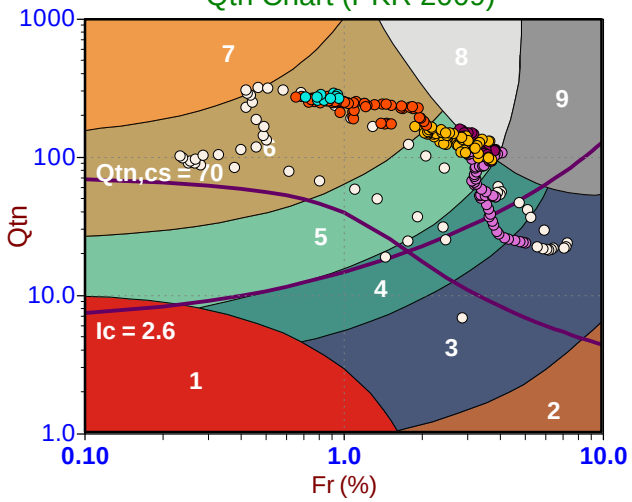

Modified SBTn (PKR 2016)

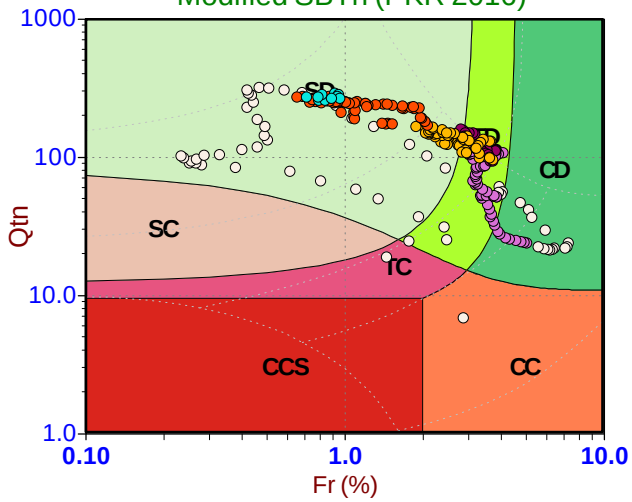

Standard SBT Chart (UBC 1986)

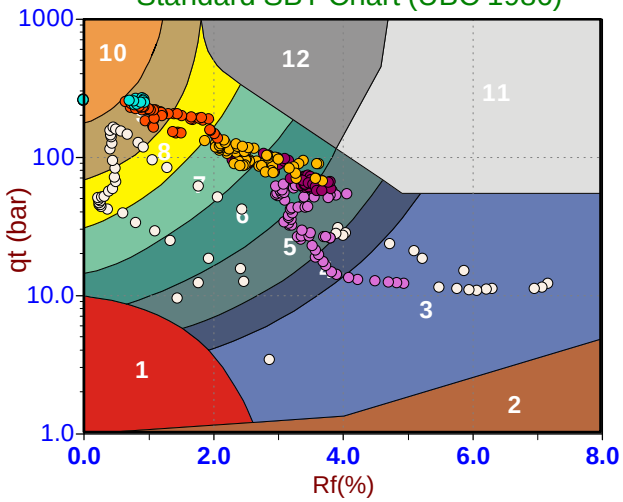

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-13 13:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT261
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

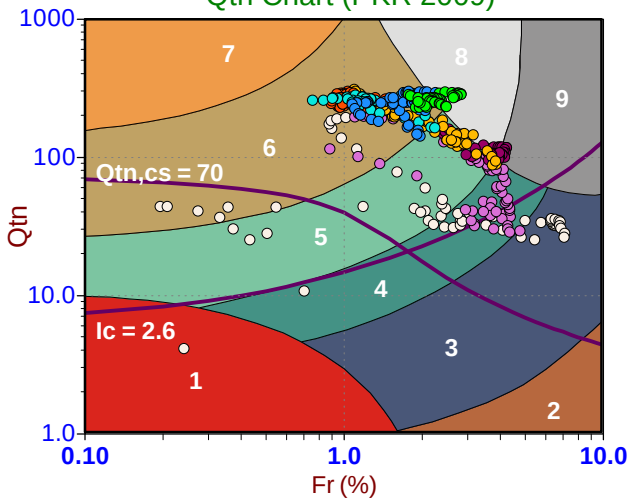

Modified SBTn (PKR 2016)

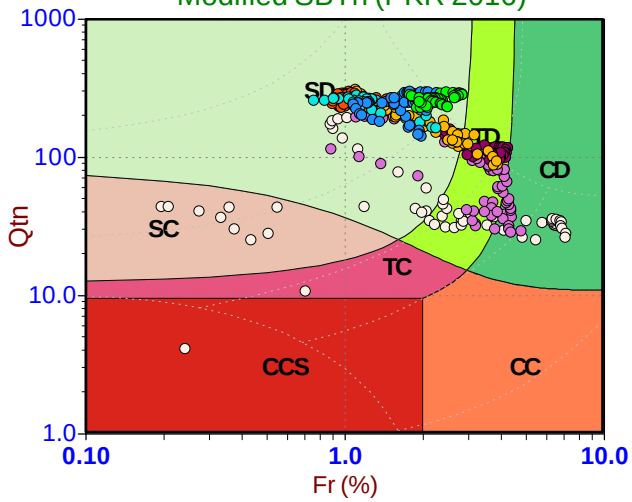

Standard SBT Chart (UBC 1986)

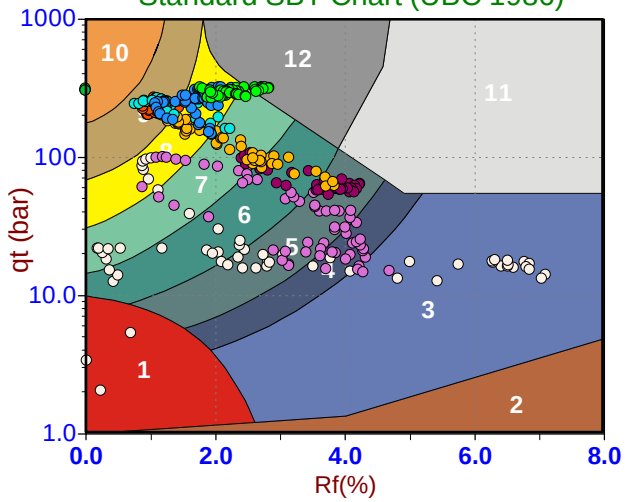

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-13 12:35
Site: Brooks, Alberta

Sounding: RCPT22-22CPT262
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

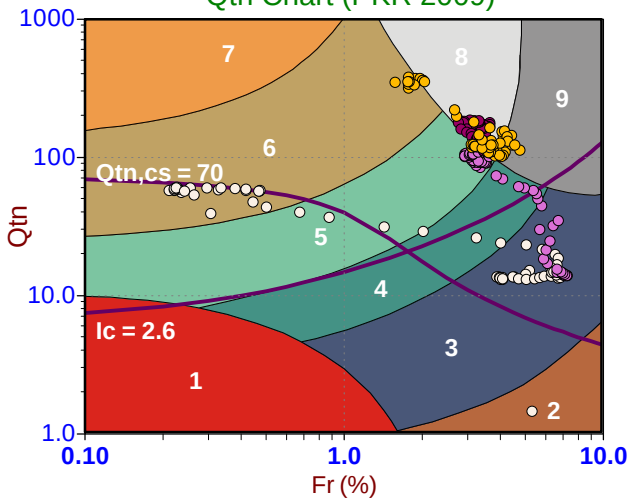

Modified SBTn (PKR 2016)

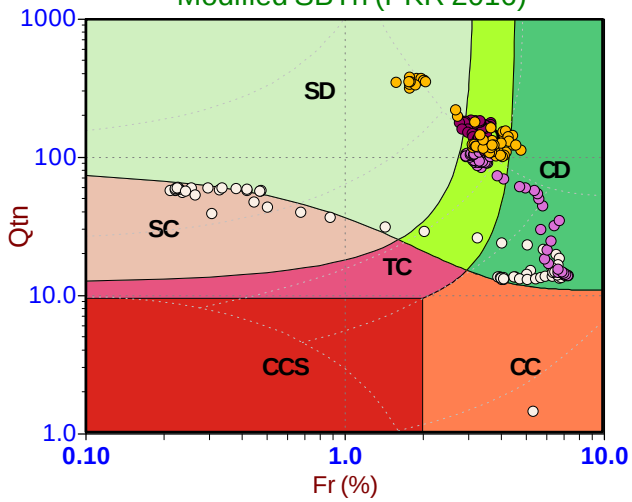

Standard SBT Chart (UBC 1986)

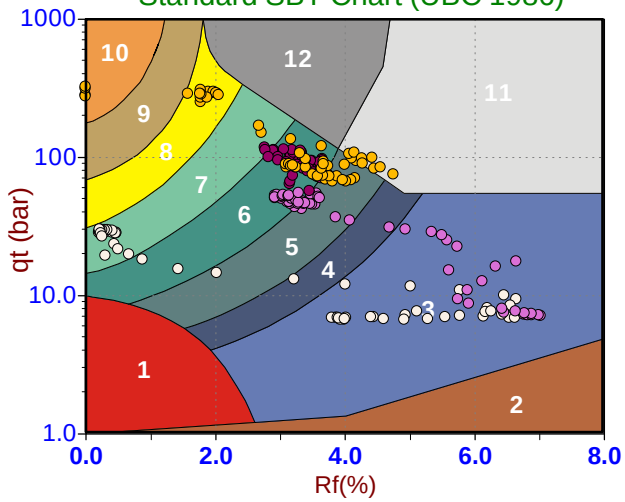

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-13 11:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT263
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

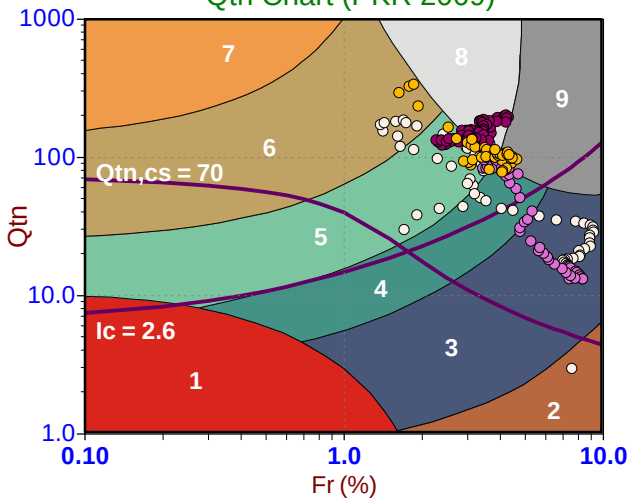

Modified SBTn (PKR 2016)

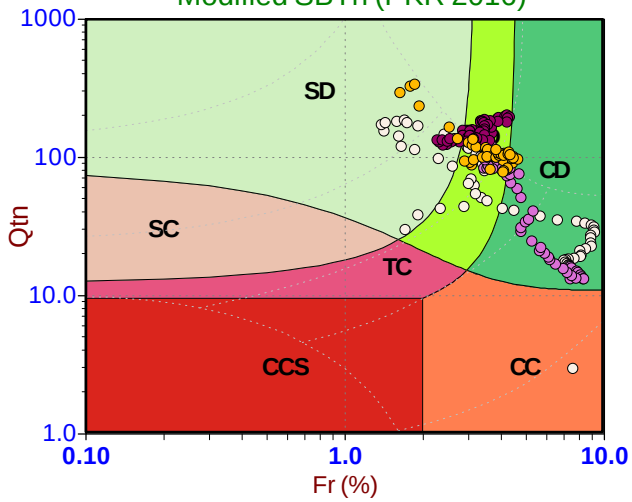

Standard SBT Chart (UBC 1986)

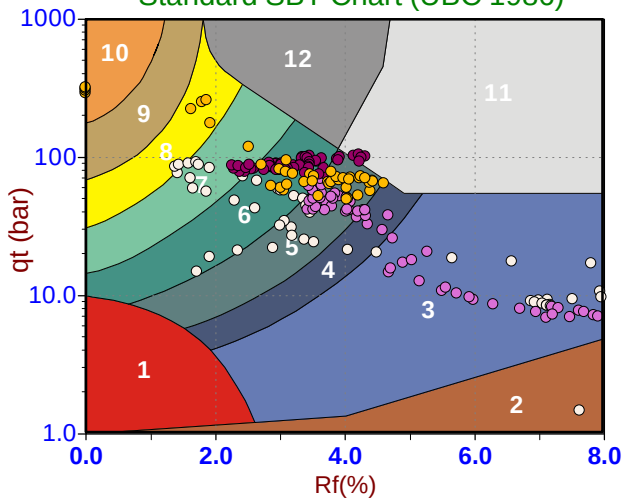

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-13 10:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT264
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

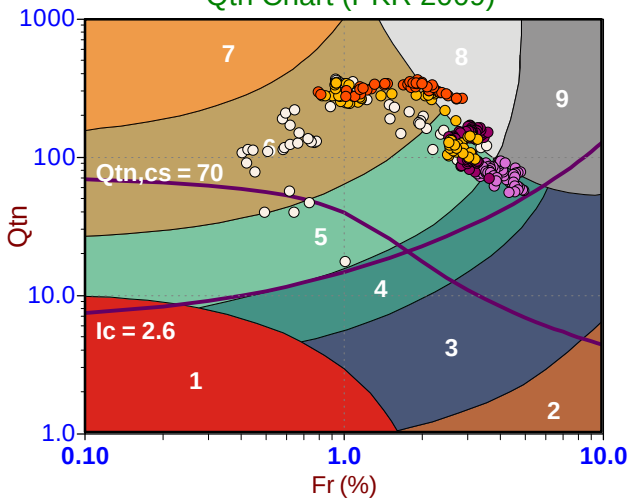

Modified SBTn (PKR 2016)

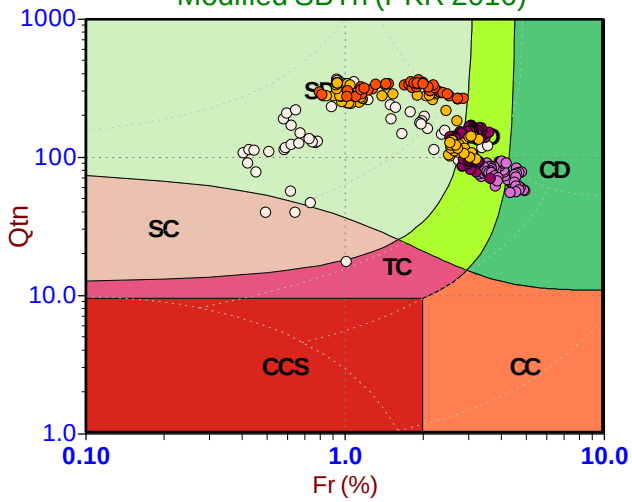

Standard SBT Chart (UBC 1986)

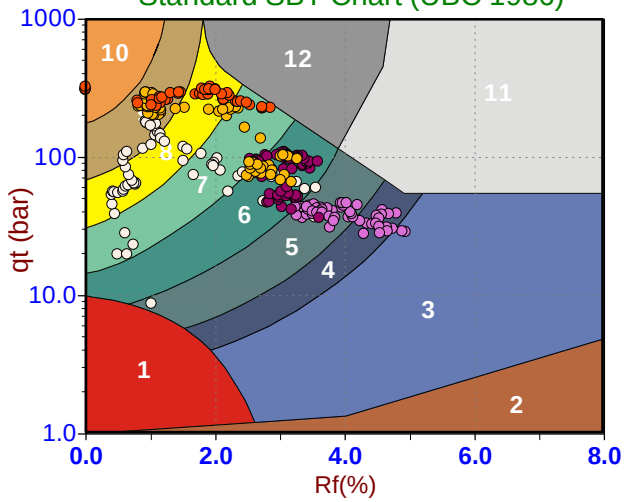

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-12 10:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT265
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

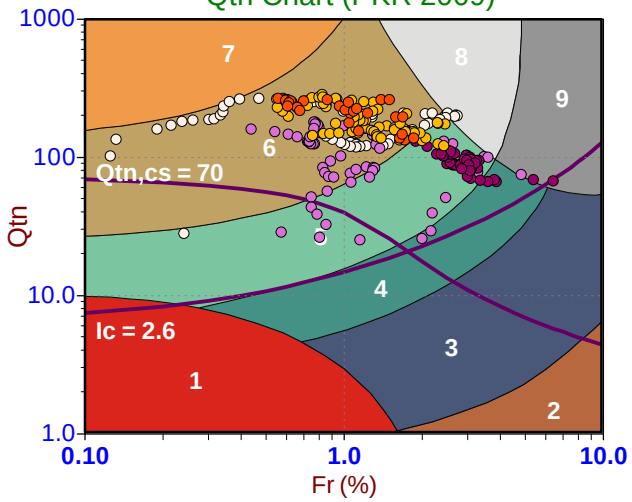

Modified SBTn (PKR 2016)

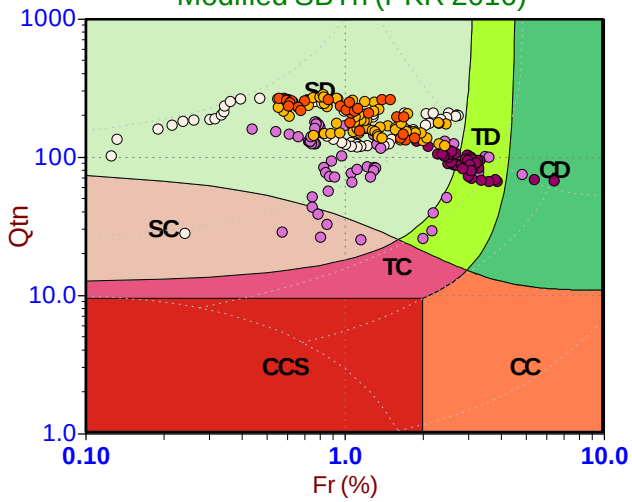

Standard SBT Chart (UBC 1986)

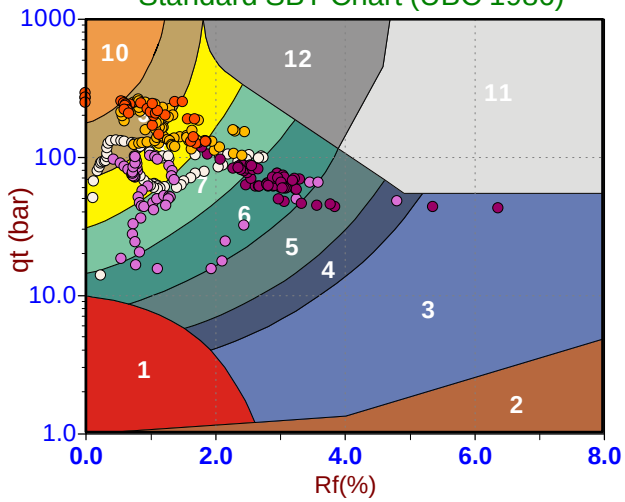

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-12 11:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT266
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

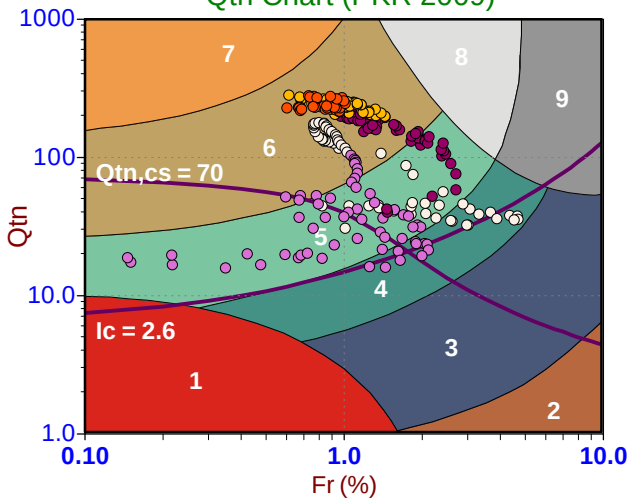

Modified SBTn (PKR 2016)

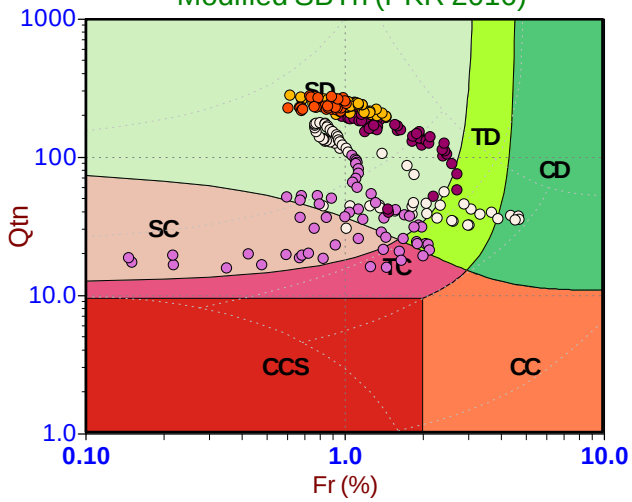

Standard SBT Chart (UBC 1986)

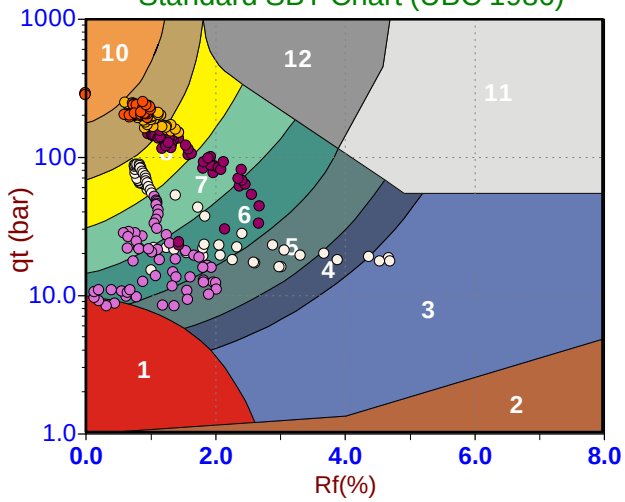

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-12 12:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT267
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

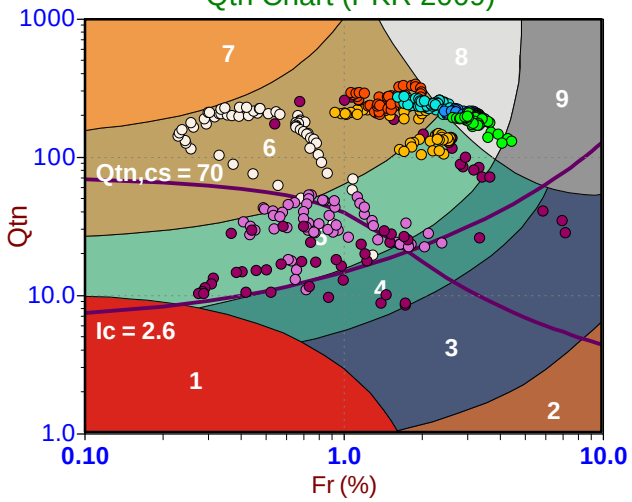

Modified SBTn (PKR 2016)

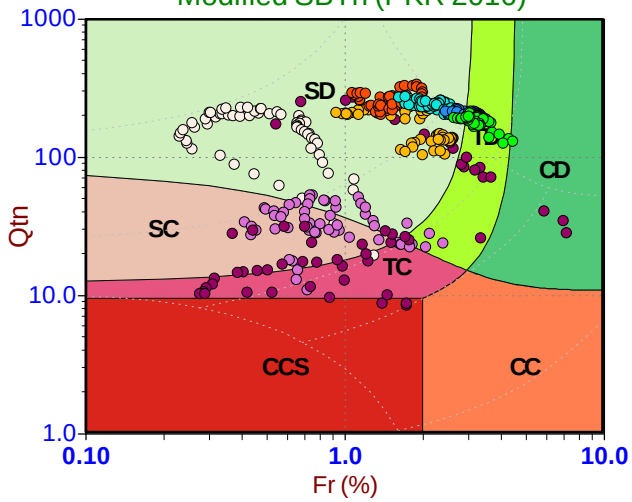

Standard SBT Chart (UBC 1986)

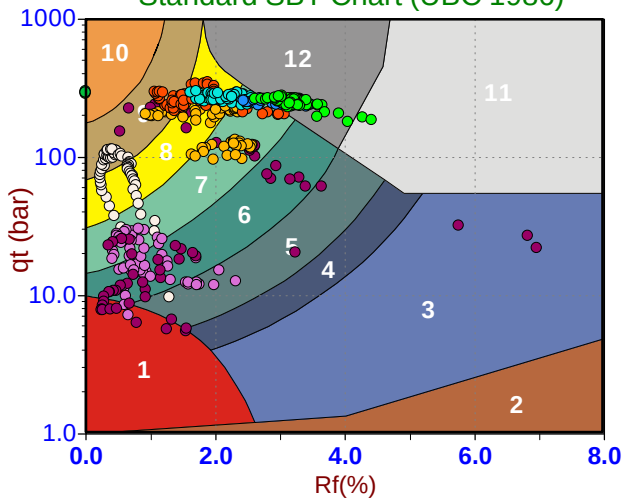

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-12 13:49
Site: Brooks, Alberta

Sounding: RCPT22-22CPT269
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

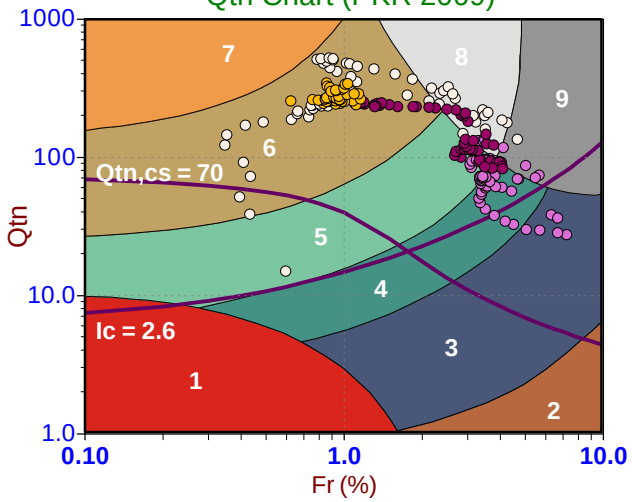

Modified SBTn (PKR 2016)

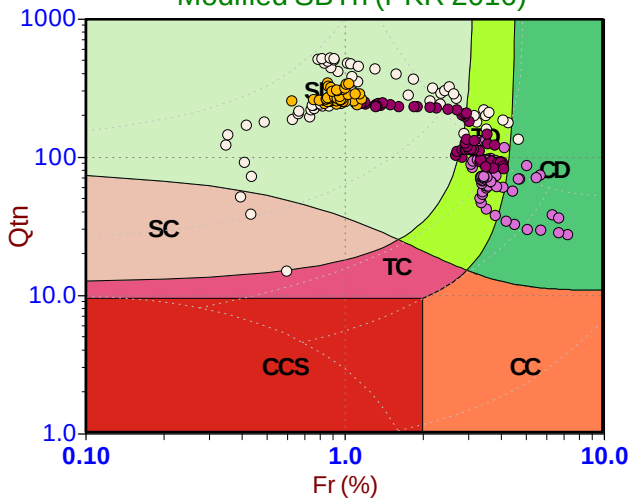

Standard SBT Chart (UBC 1986)

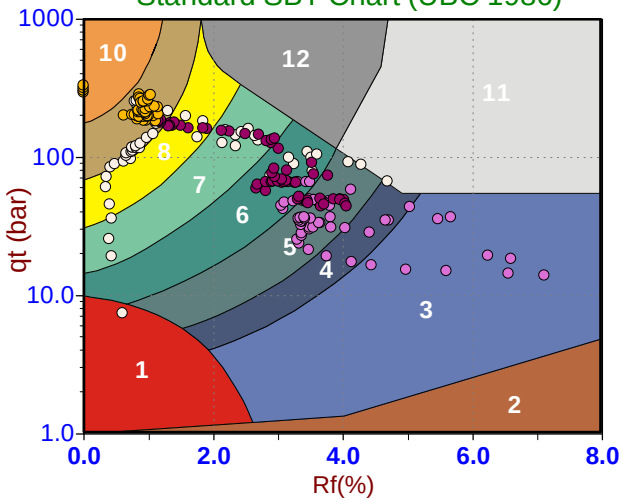

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-12 14:40
Site: Brooks, Alberta

Sounding: RCPT22-22CPT270
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

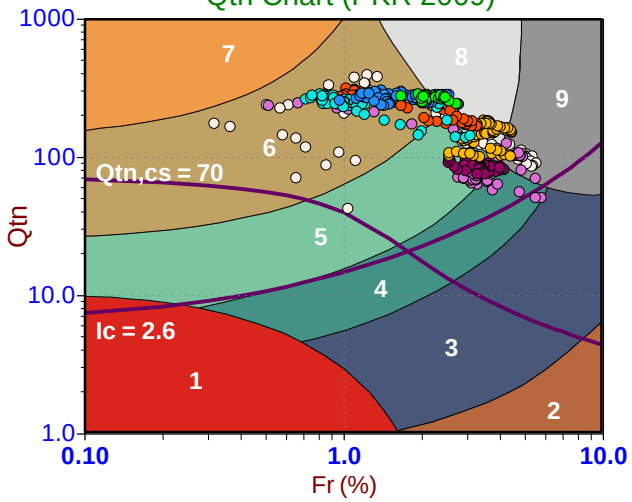

Modified SBTn (PKR 2016)

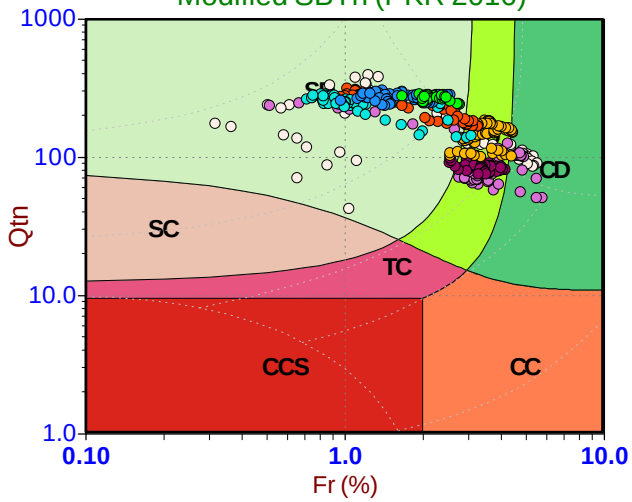

Standard SBT Chart (UBC 1986)

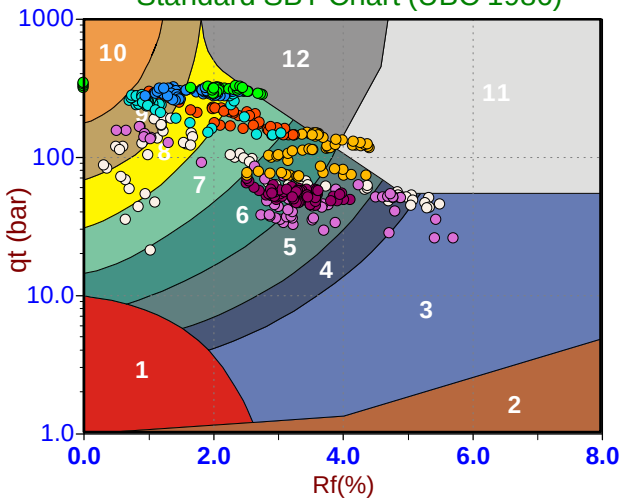

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-12 15:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT271
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

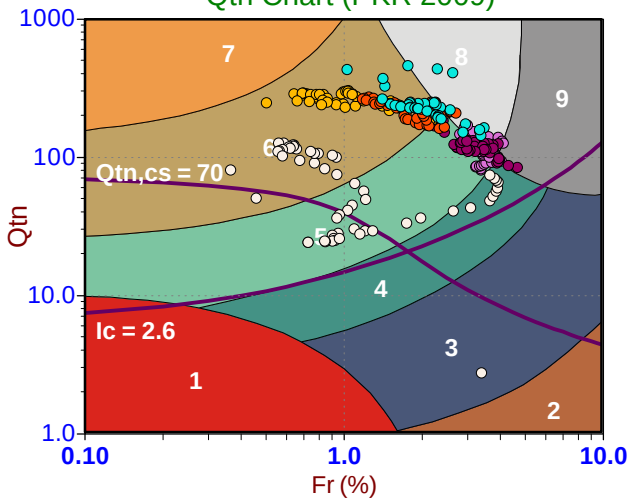

Modified SBTn (PKR 2016)

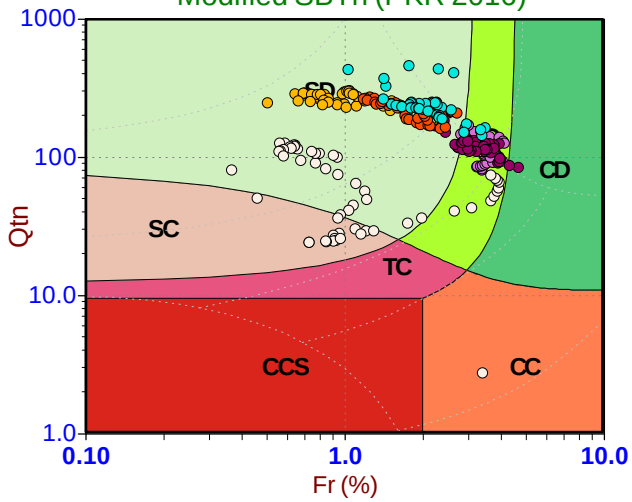

Standard SBT Chart (UBC 1986)

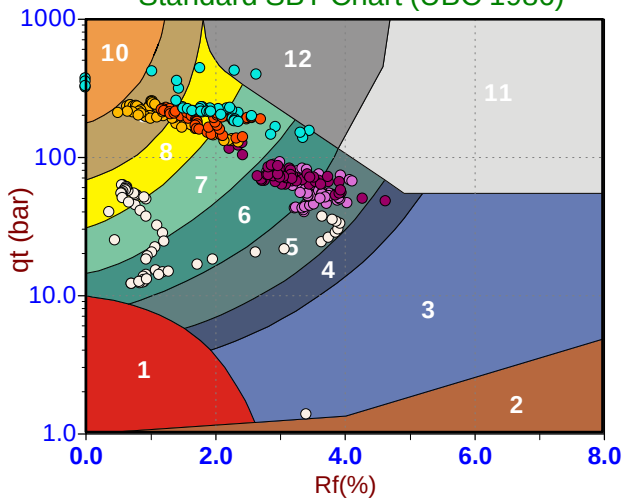

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-13 08:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT272
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

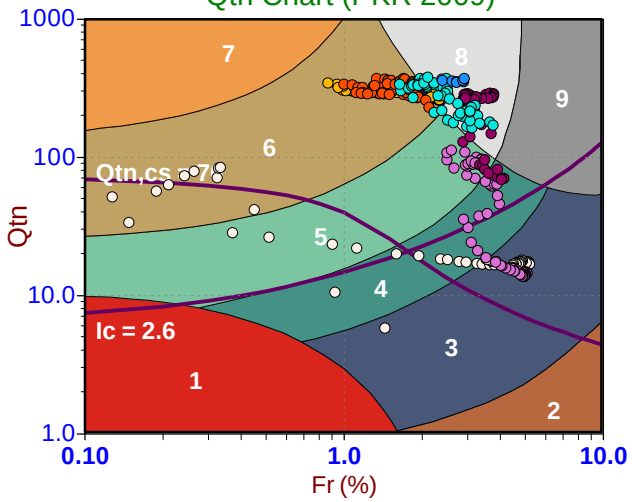

Modified SBTn (PKR 2016)

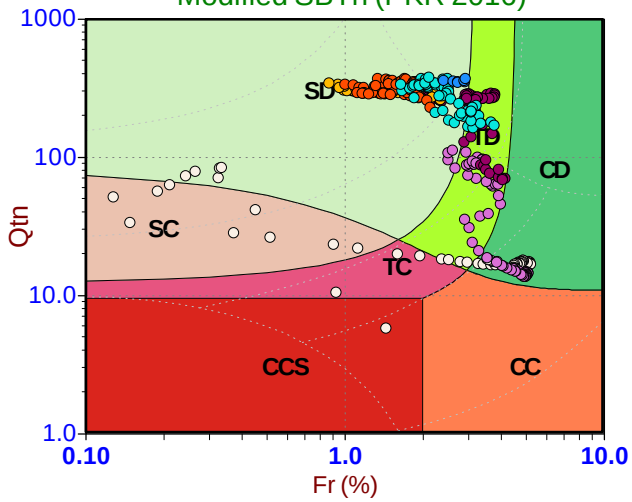

Standard SBT Chart (UBC 1986)

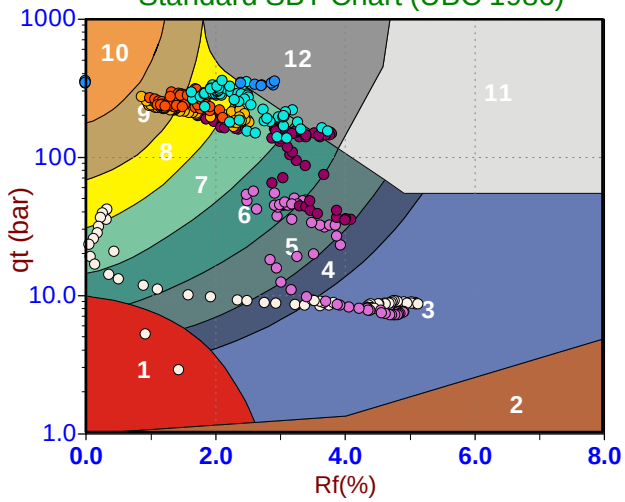

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-13 09:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT273
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

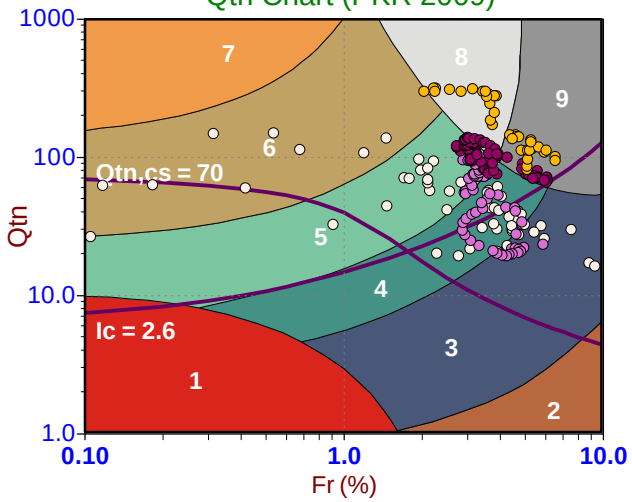

Modified SBTn (PKR 2016)

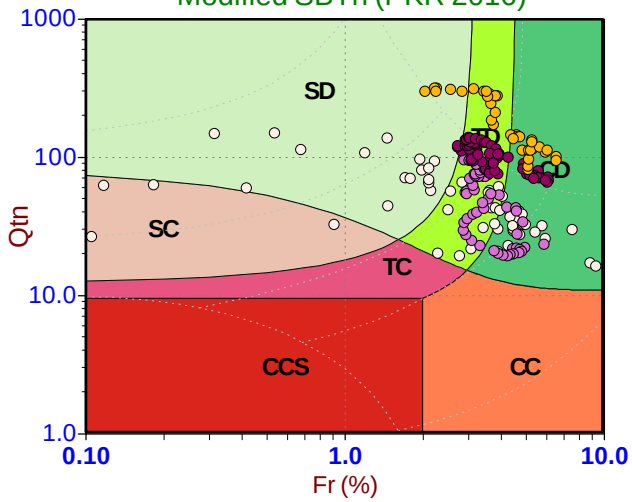

Standard SBT Chart (UBC 1986)

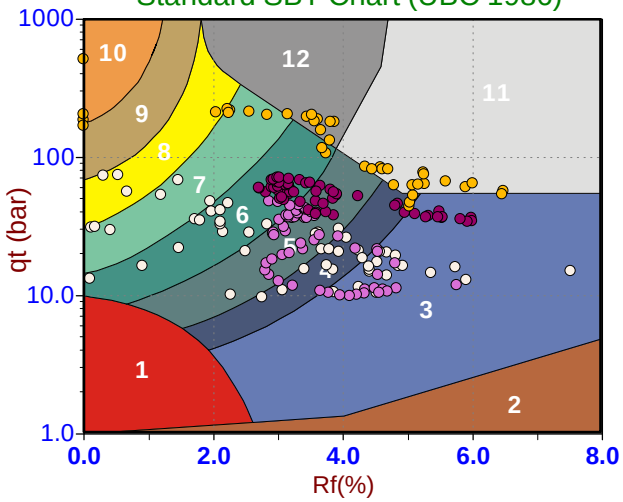

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-31 17:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT274
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

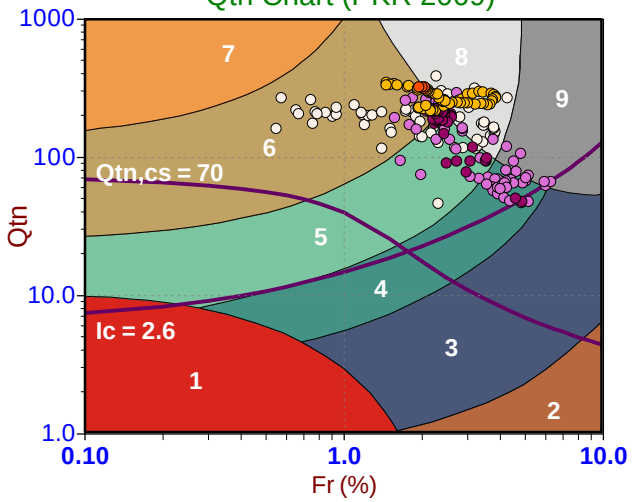

Modified SBTn (PKR 2016)

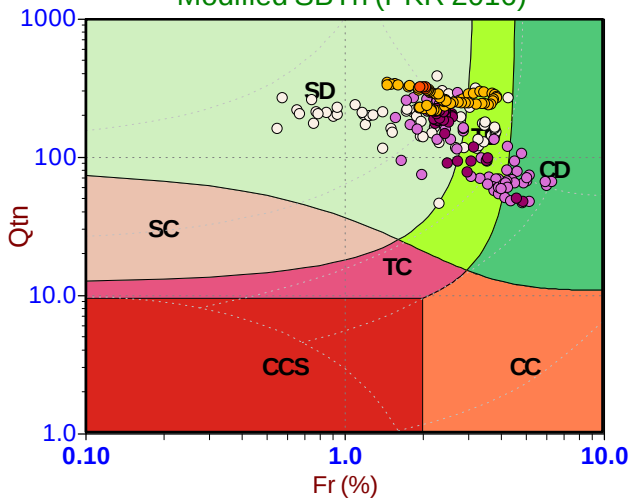

Standard SBT Chart (UBC 1986)

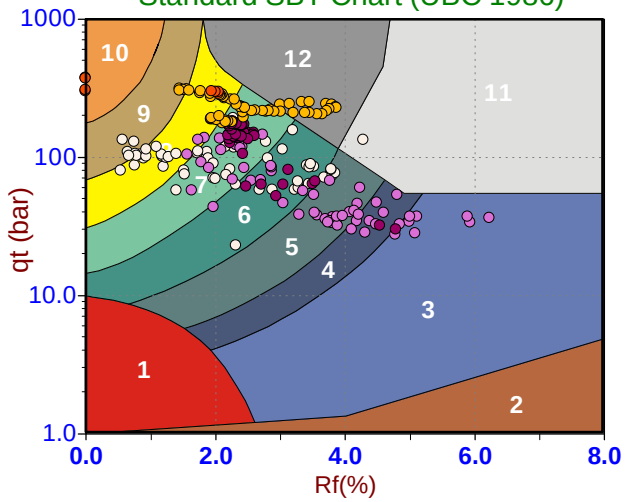

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-01 06:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT275
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

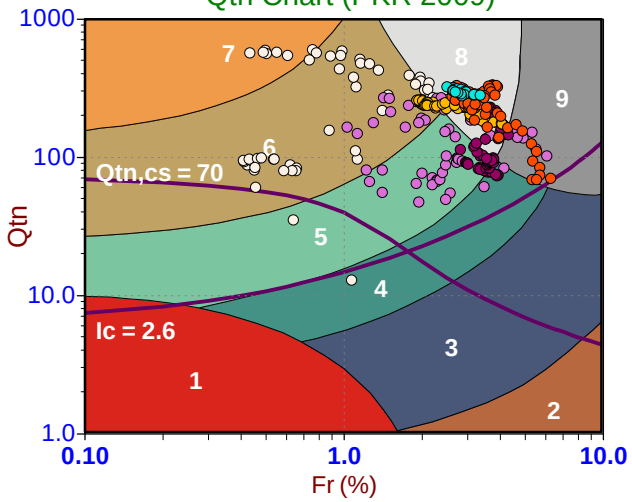

Modified SBTn (PKR 2016)

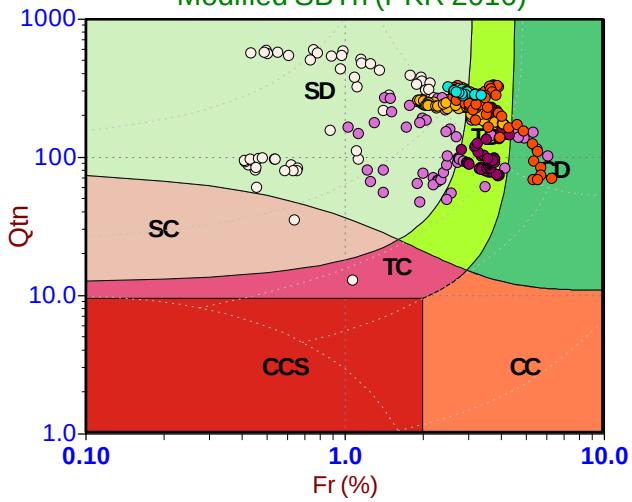

Standard SBT Chart (UBC 1986)

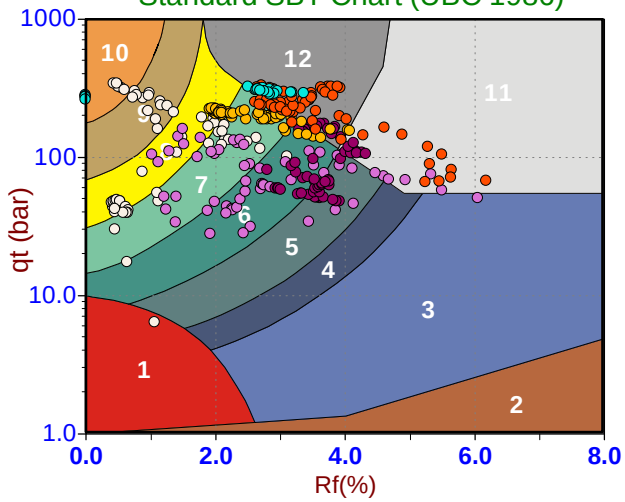

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-01 07:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT276
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

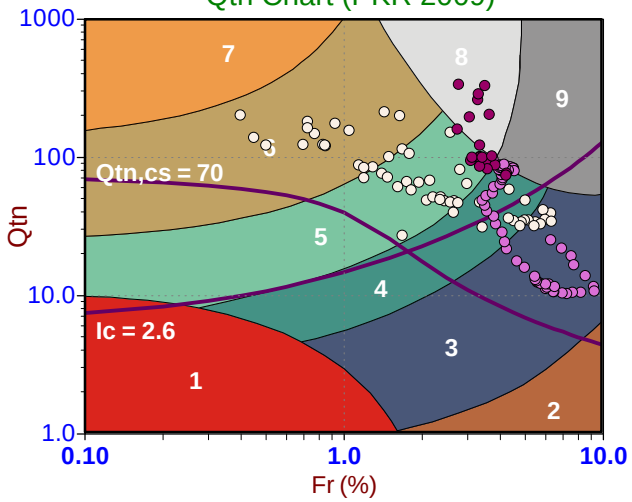

Modified SBTn (PKR 2016)

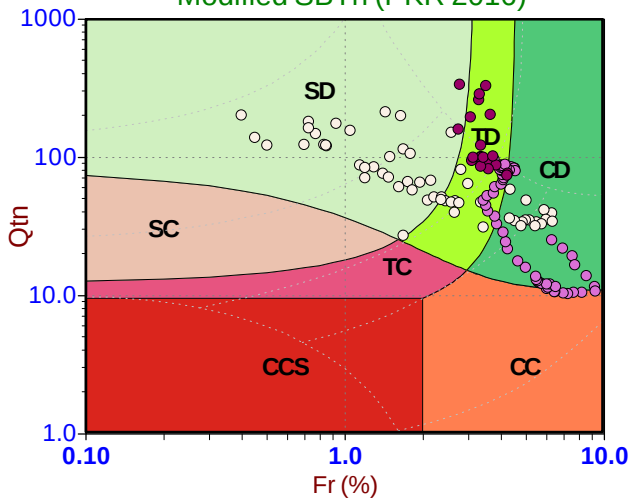

Standard SBT Chart (UBC 1986)

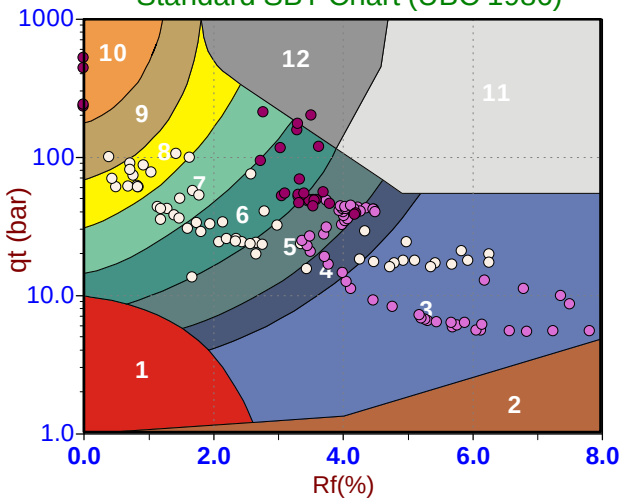

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-01 07:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT276B
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

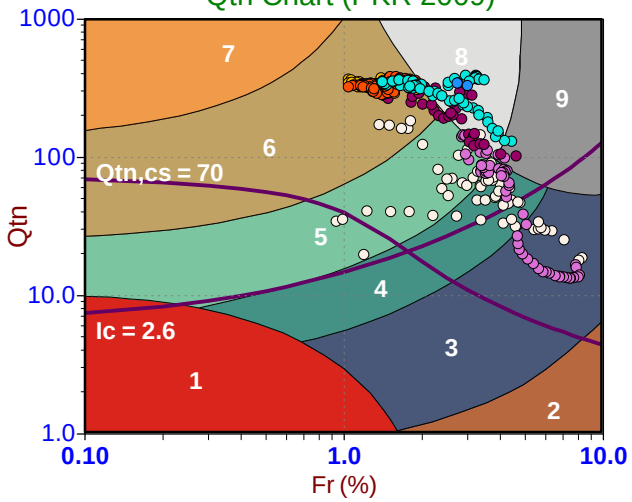

Modified SBTn (PKR 2016)

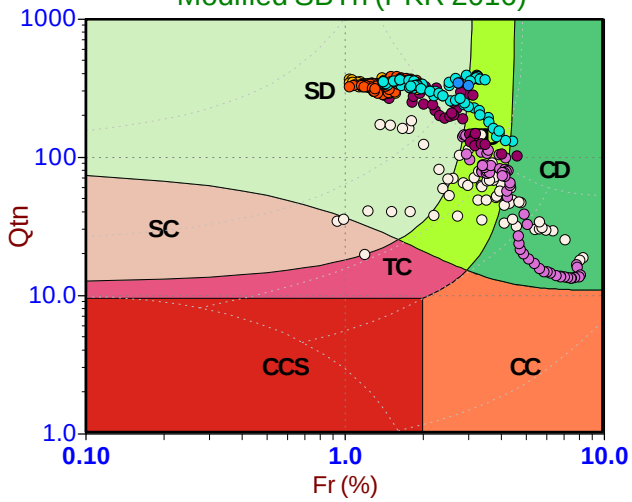

Standard SBT Chart (UBC 1986)

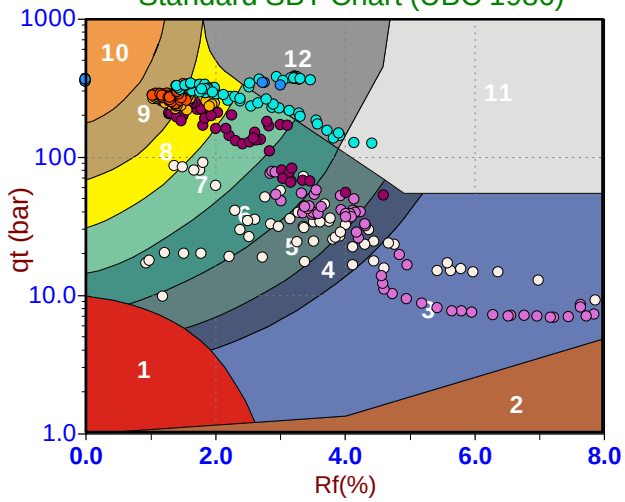

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-01 09:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT277
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

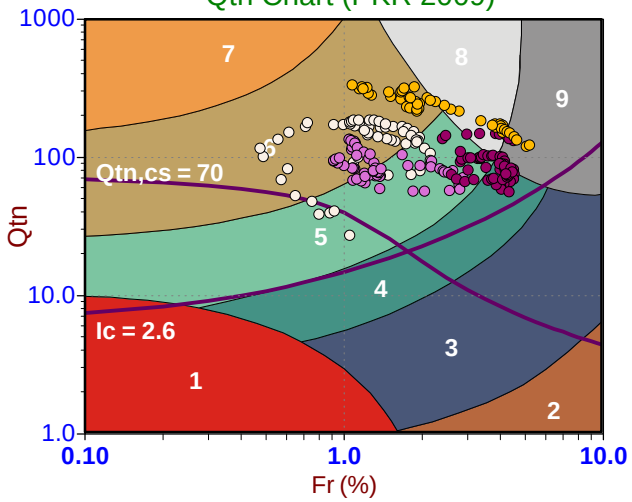

Modified SBTn (PKR 2016)

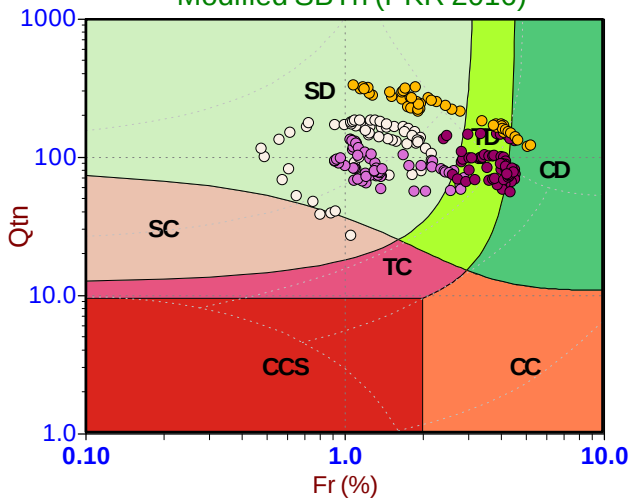

Standard SBT Chart (UBC 1986)

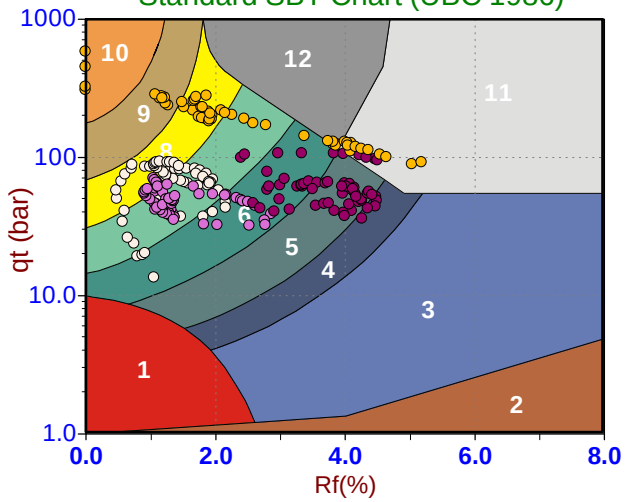

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-01 10:35
Site: Brooks, Alberta

Sounding: RCPT22-22CPT278
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

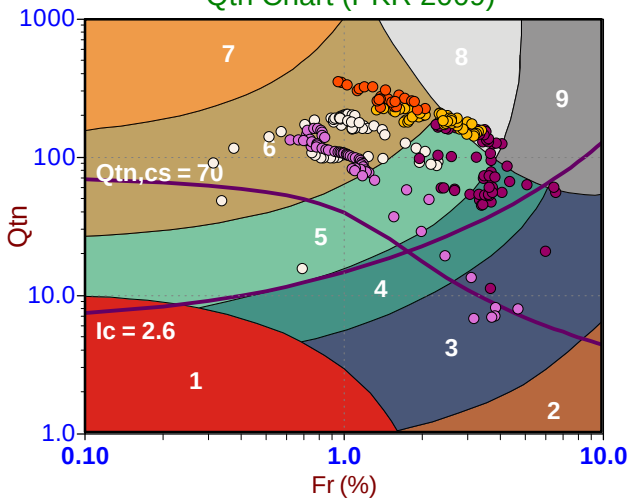

Modified SBTn (PKR 2016)

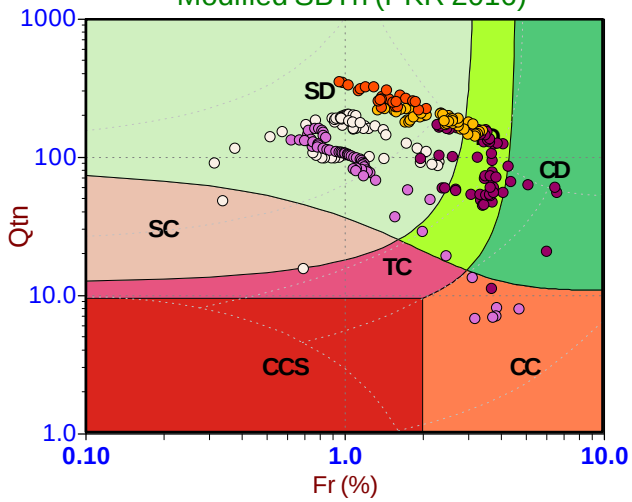

Standard SBT Chart (UBC 1986)

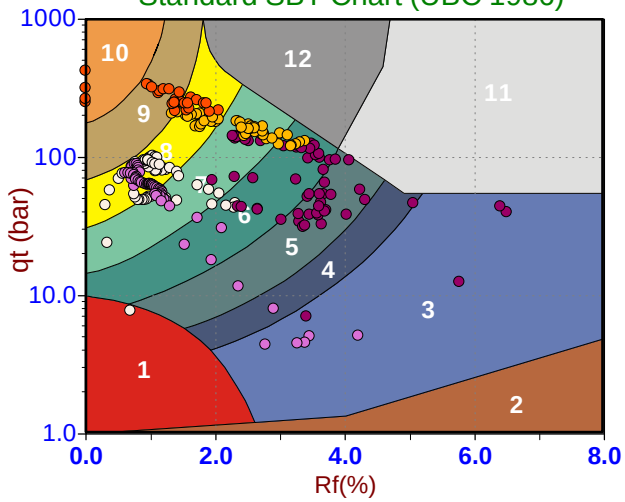

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-01 11:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT279
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

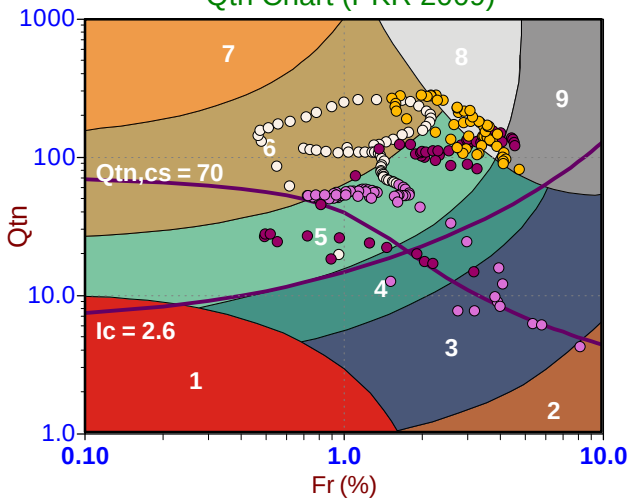

Modified SBTn (PKR 2016)

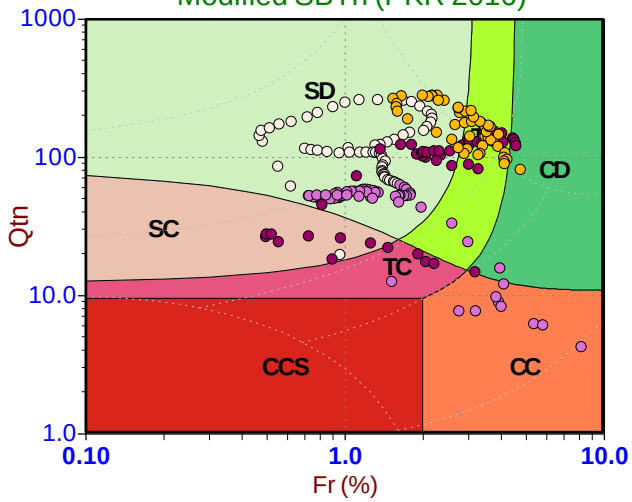

Standard SBT Chart (UBC 1986)

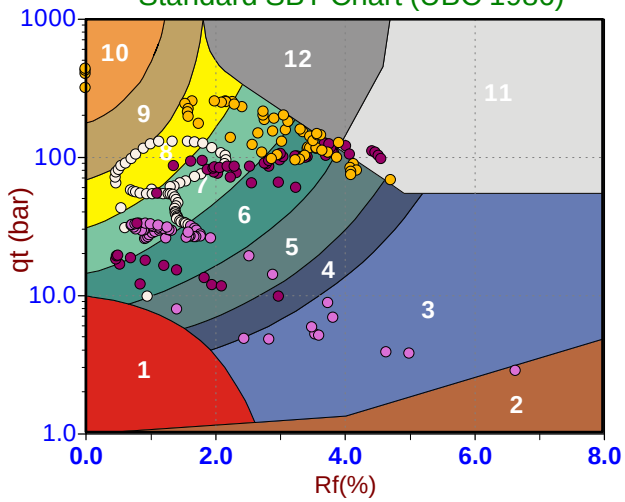

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-01 12:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT280
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

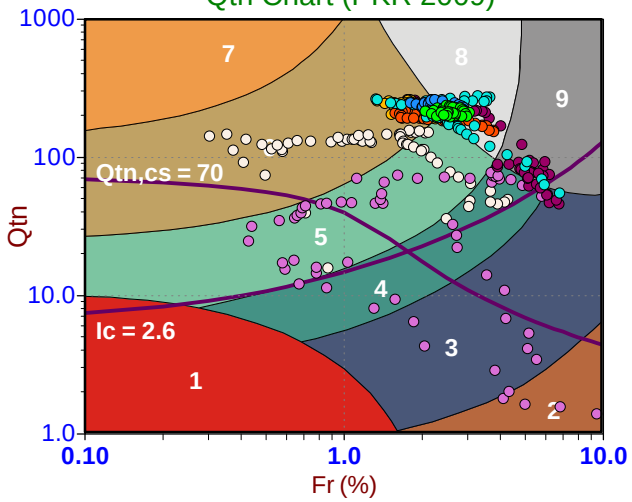

Modified SBTn (PKR 2016)

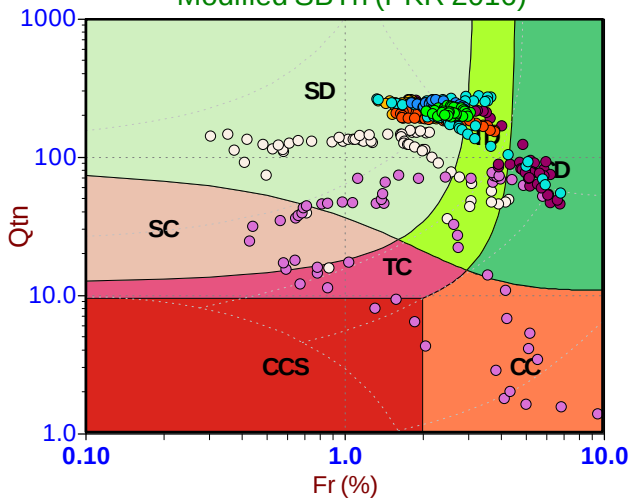

Standard SBT Chart (UBC 1986)

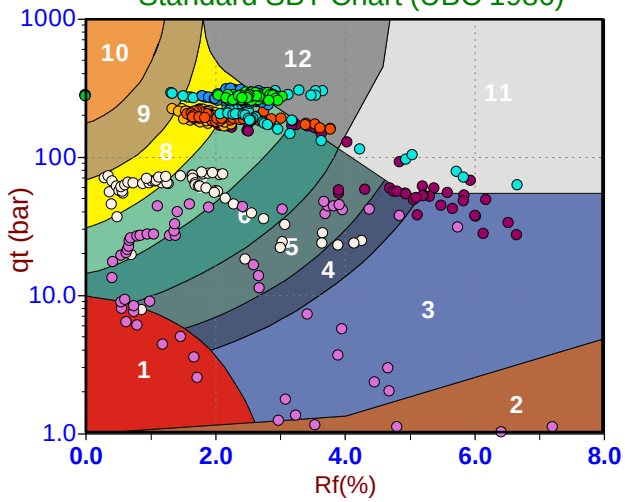

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-03-29 06:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT281
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

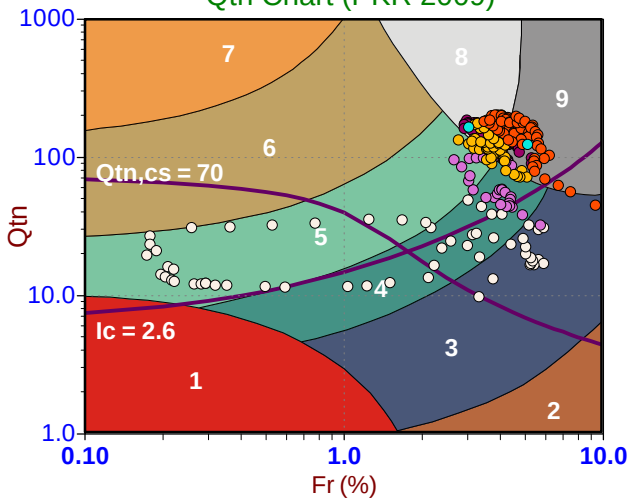

Modified SBTn (PKR 2016)

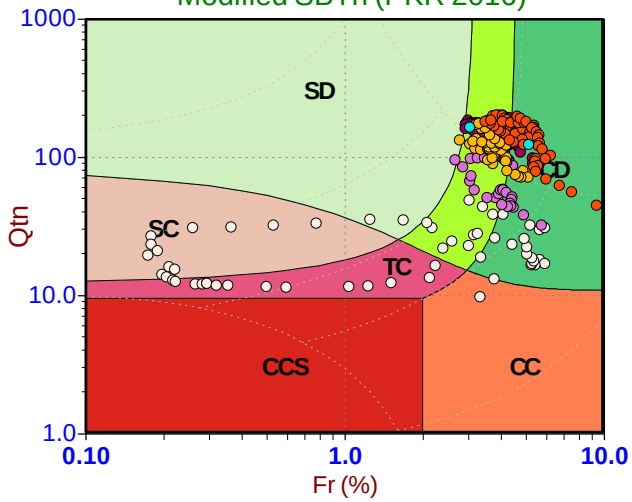

Standard SBT Chart (UBC 1986)

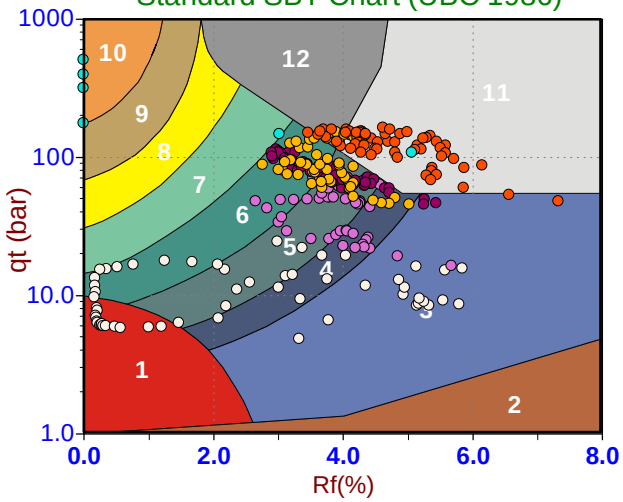

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-01 14:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT282
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

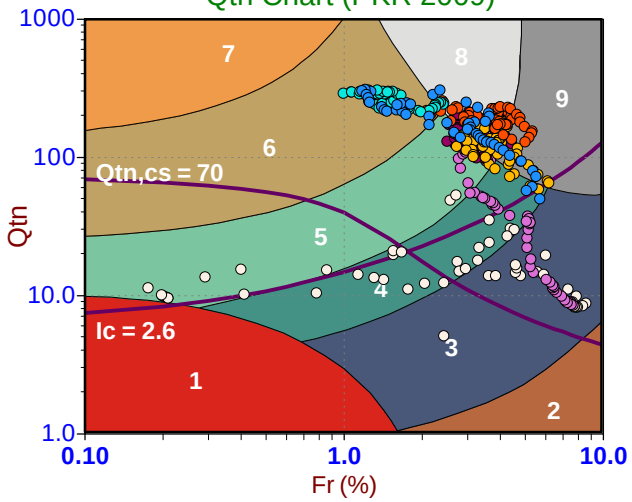

Modified SBTn (PKR 2016)

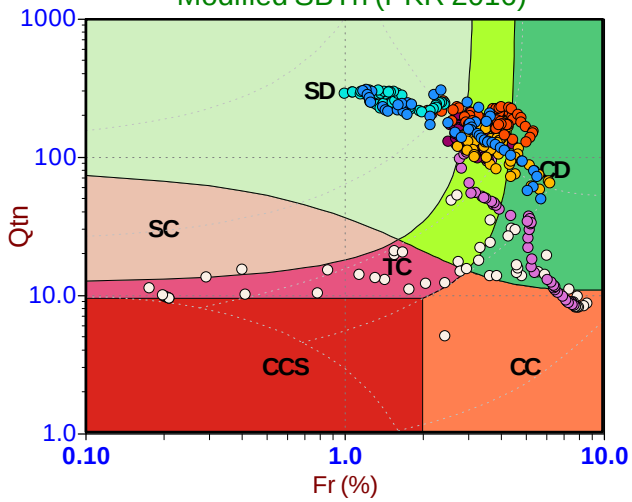

Standard SBT Chart (UBC 1986)

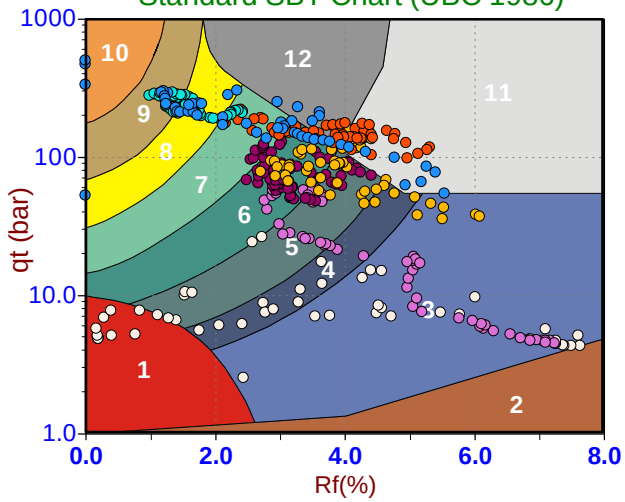

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-01 15:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT283
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

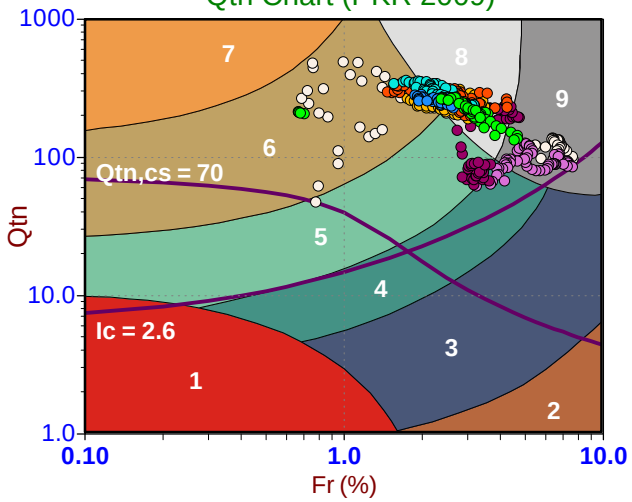

Modified SBTn (PKR 2016)

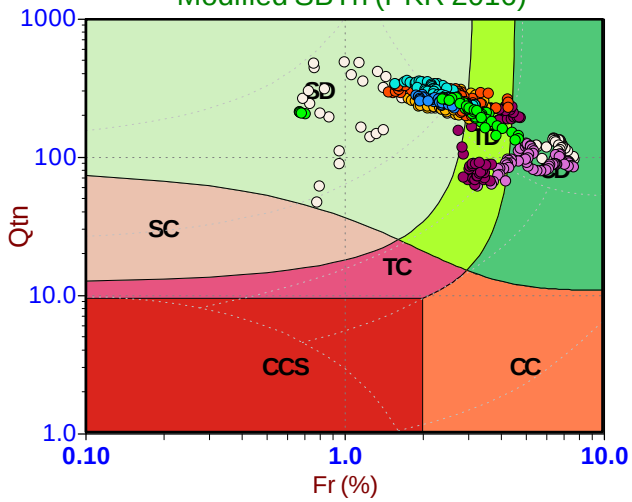

Standard SBT Chart (UBC 1986)

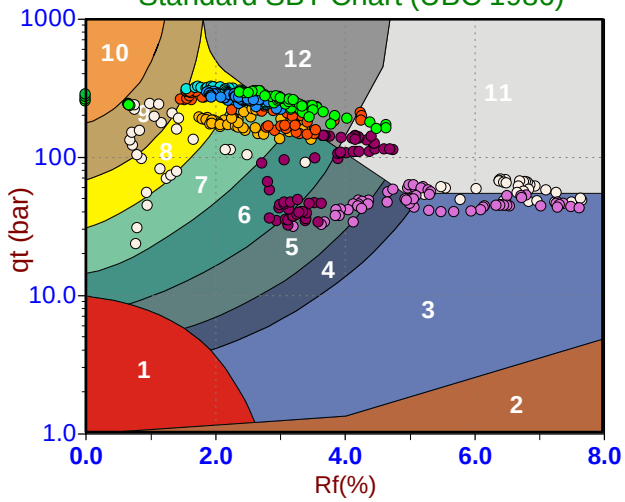

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-02 10:02
Site: Brooks, Alberta

Sounding: RCPT22-22CPT284
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

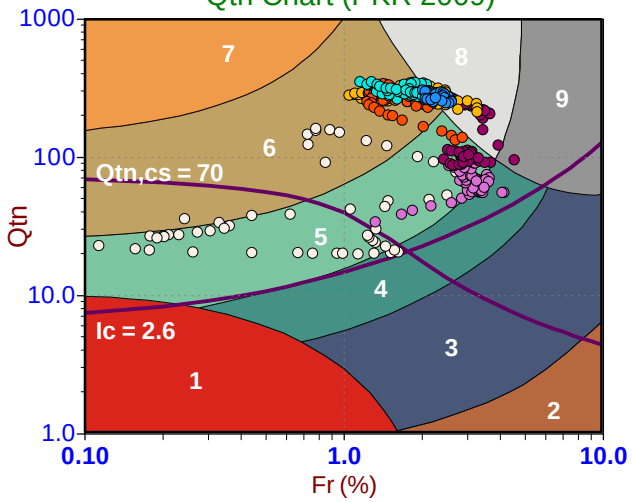

Modified SBTn (PKR 2016)

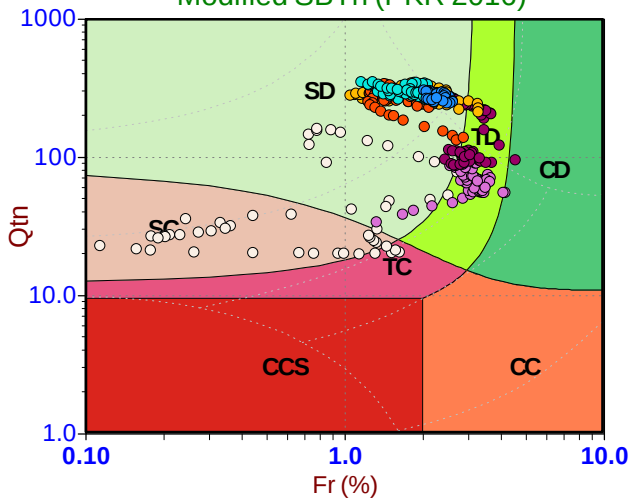

Standard SBT Chart (UBC 1986)

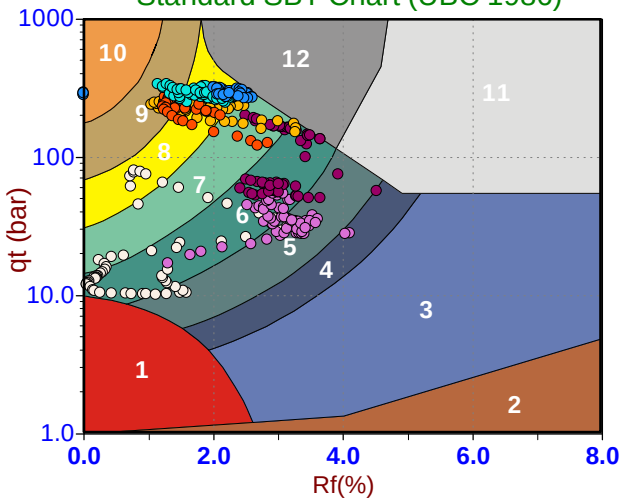

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-02 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT285
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

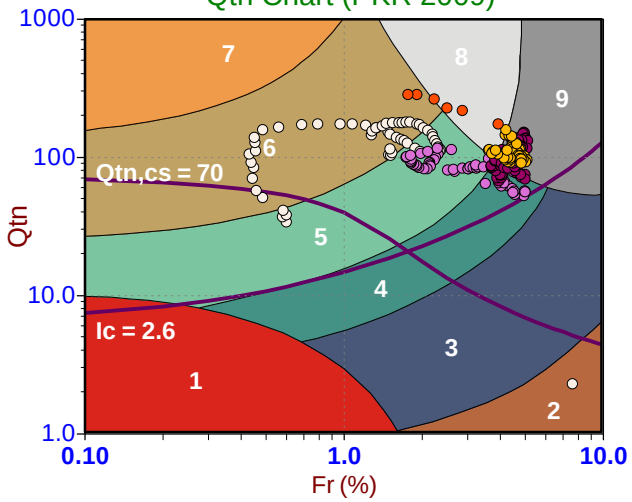

Modified SBTn (PKR 2016)

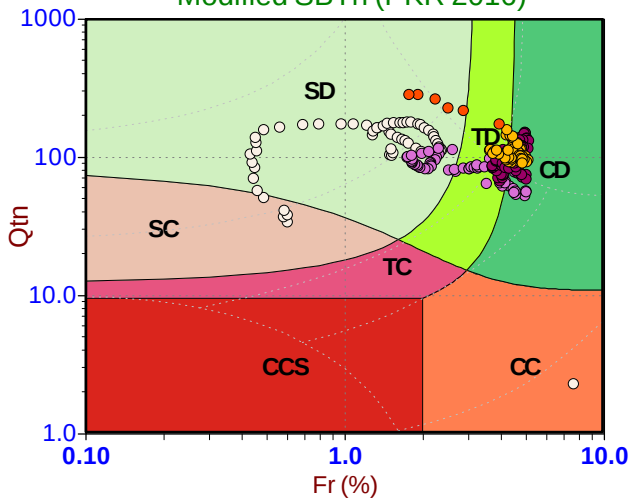

Standard SBT Chart (UBC 1986)

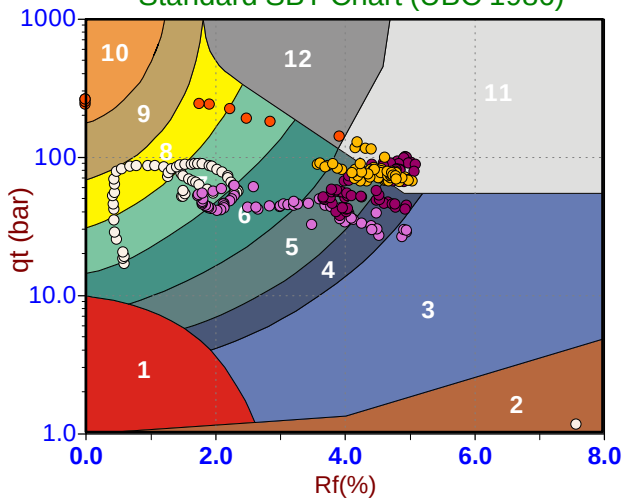

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-04 09:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT286
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

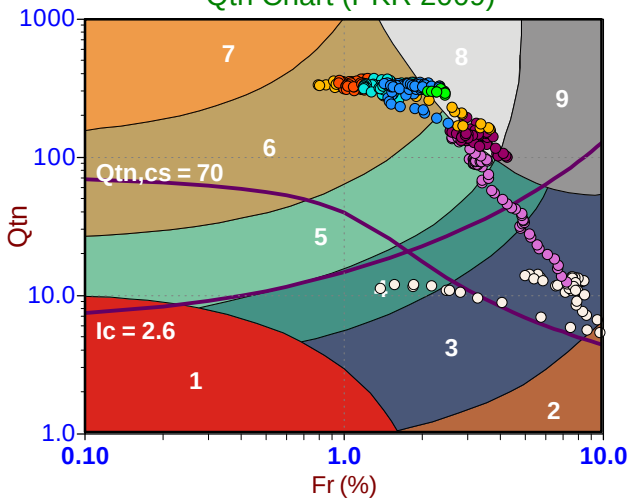

Modified SBTn (PKR 2016)

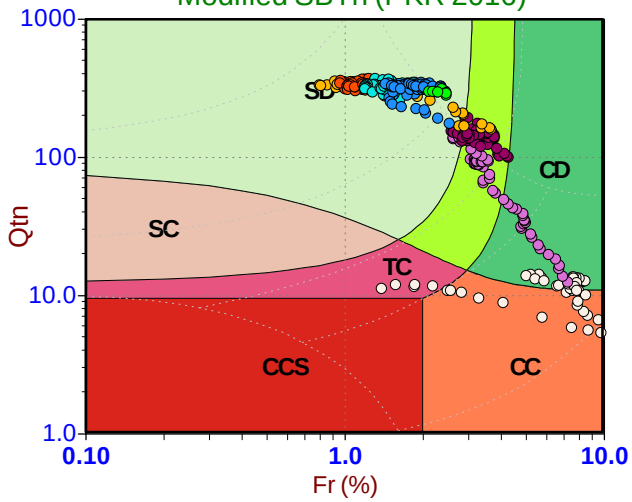

Standard SBT Chart (UBC 1986)

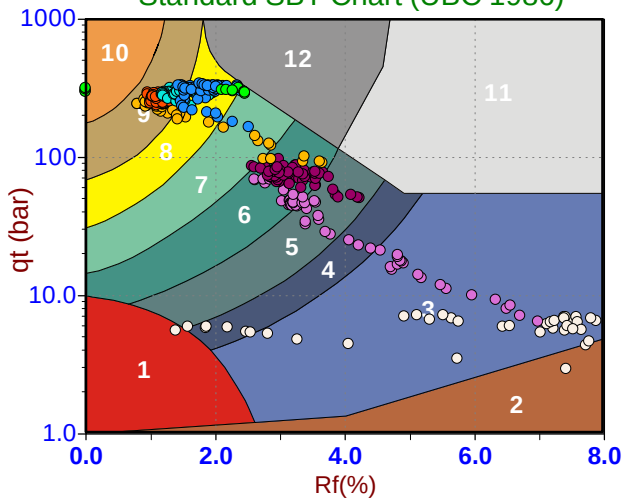

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-04 12:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT287
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

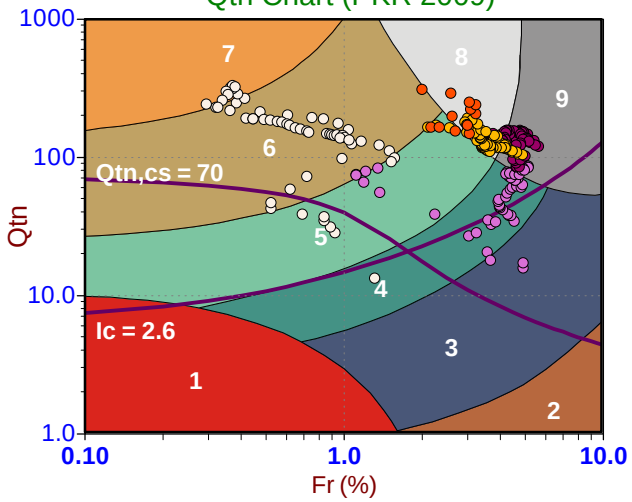

Modified SBTn (PKR 2016)

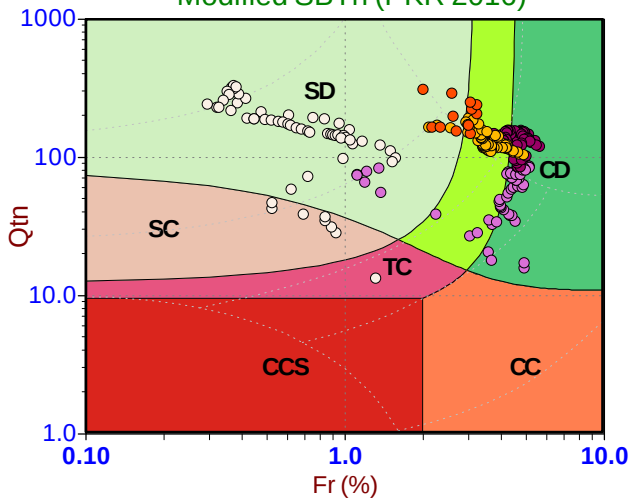

Standard SBT Chart (UBC 1986)

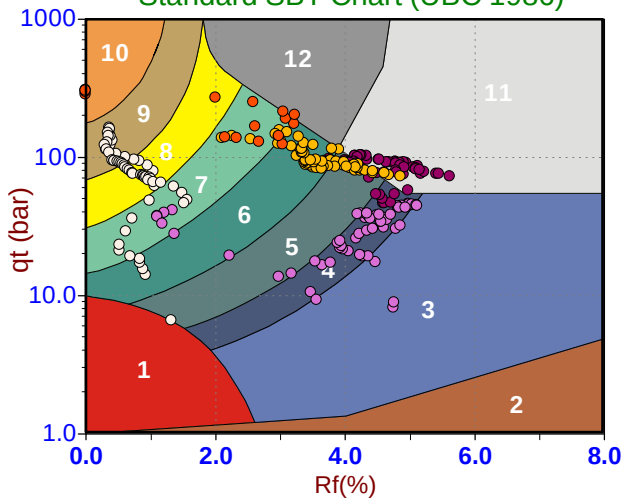

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-04 14:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT288
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

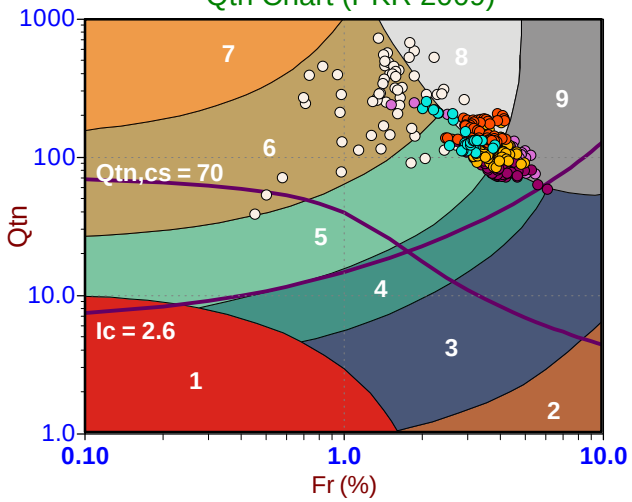

Modified SBTn (PKR 2016)

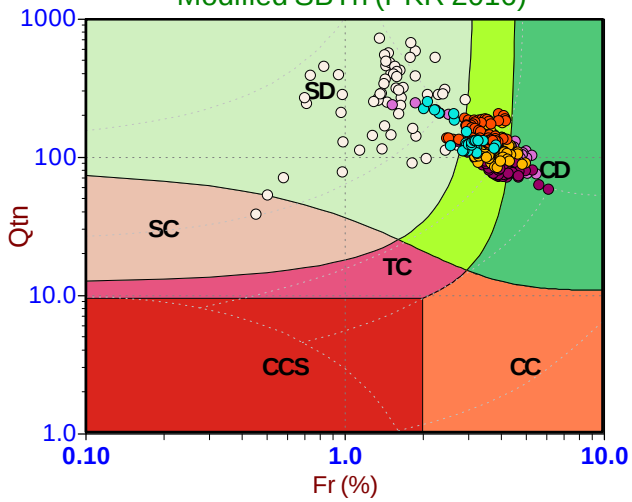

Standard SBT Chart (UBC 1986)

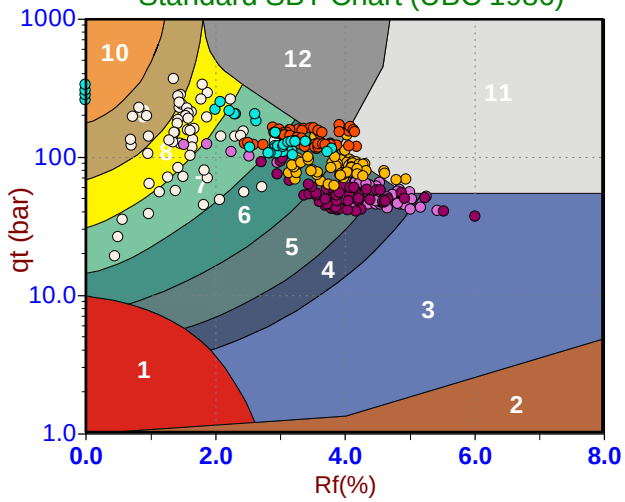

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-05 08:18
Site: Brooks, Alberta

Sounding: RCPT22-22CPT300
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

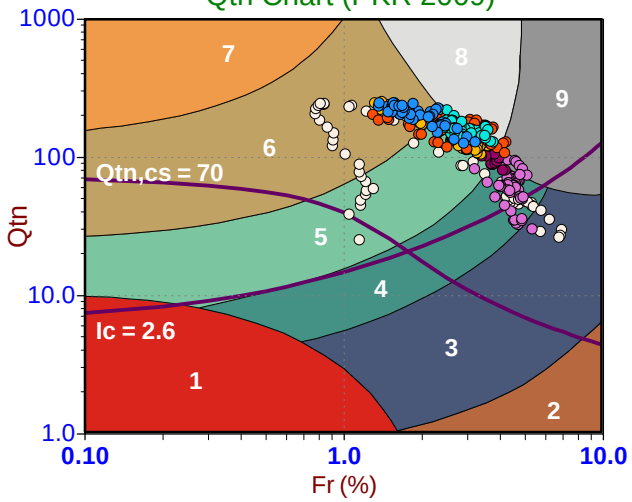

Modified SBTn (PKR 2016)

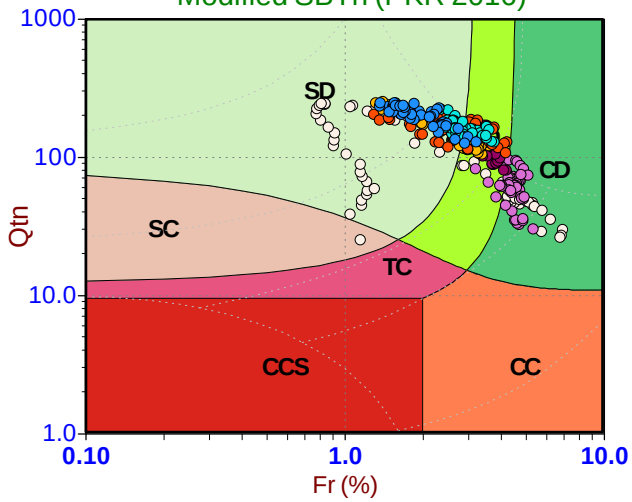

Standard SBT Chart (UBC 1986)

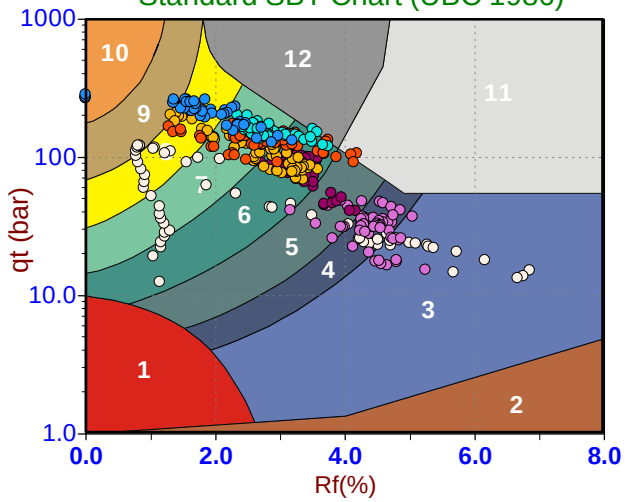

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-05 10:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT301B
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

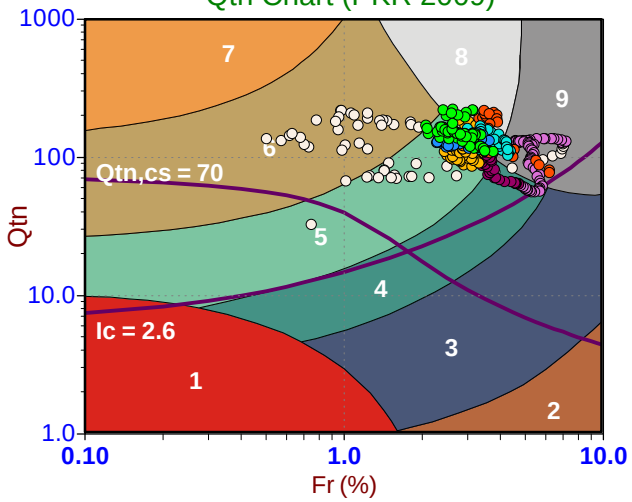

Modified SBTn (PKR 2016)

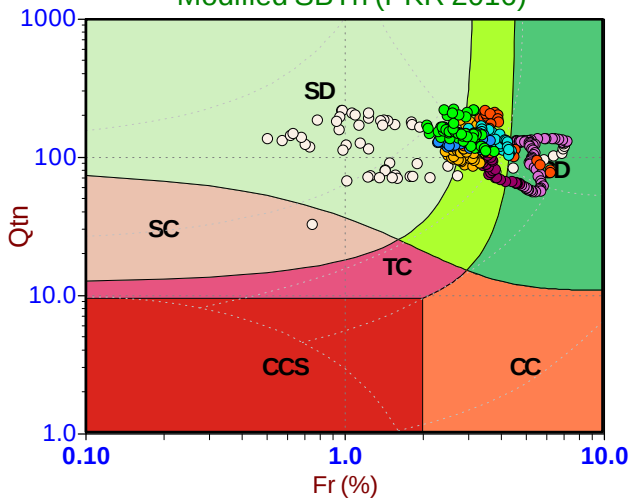

Standard SBT Chart (UBC 1986)

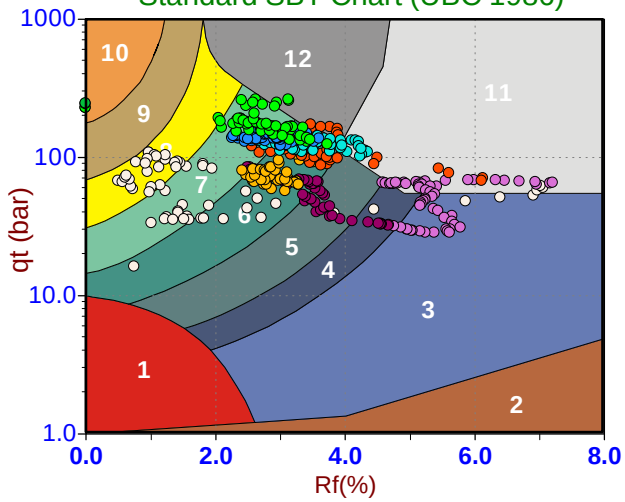

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-05 10:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT301
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

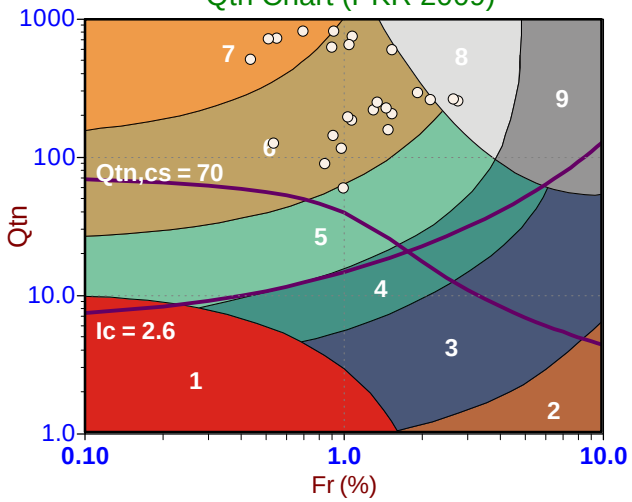

Modified SBTn (PKR 2016)

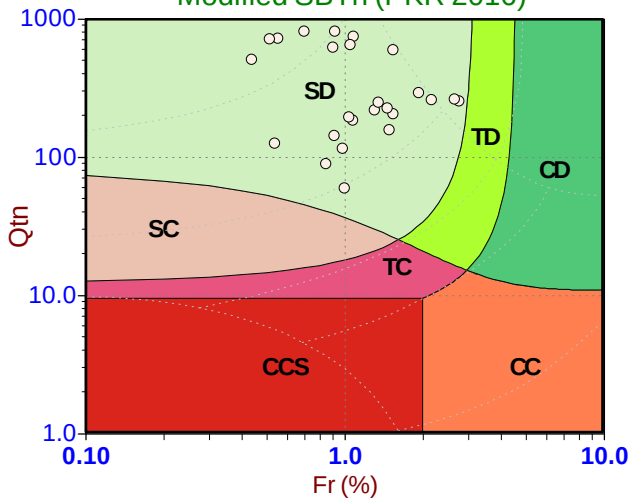

Standard SBT Chart (UBC 1986)

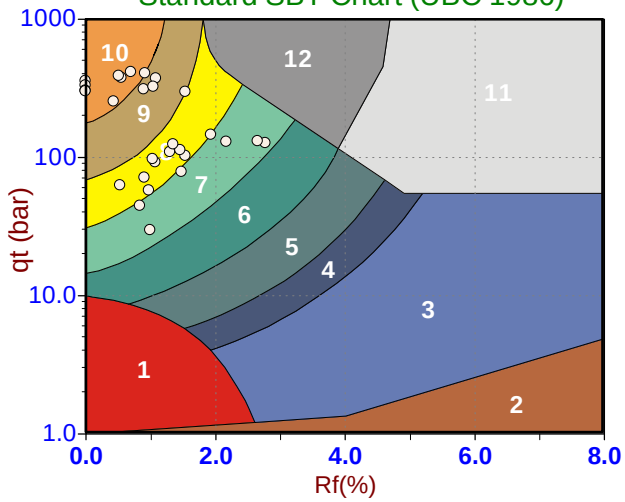

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-05 11:25
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT302
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

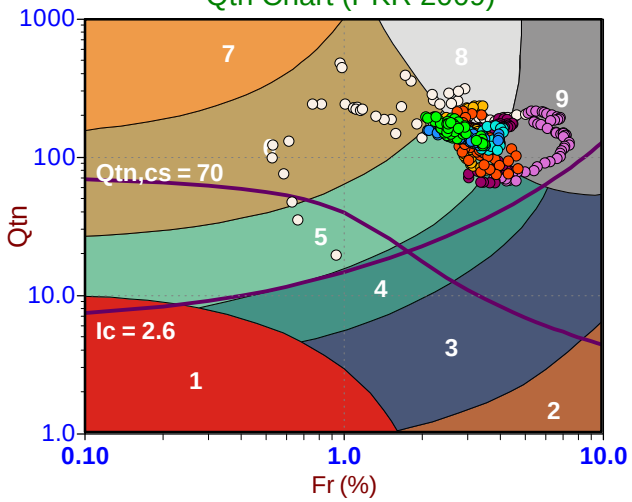

Modified SBTn (PKR 2016)

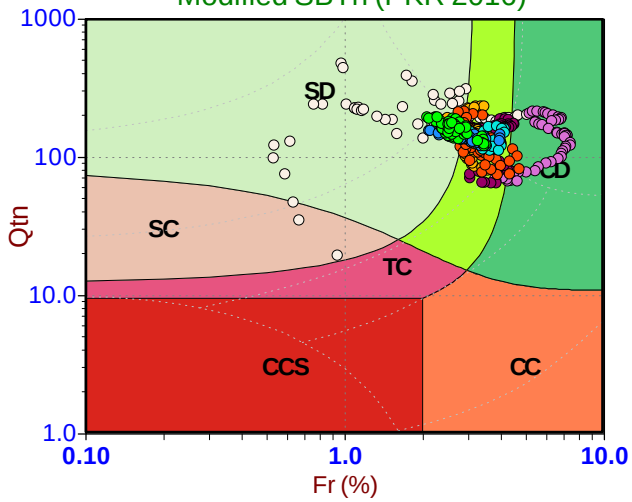

Standard SBT Chart (UBC 1986)

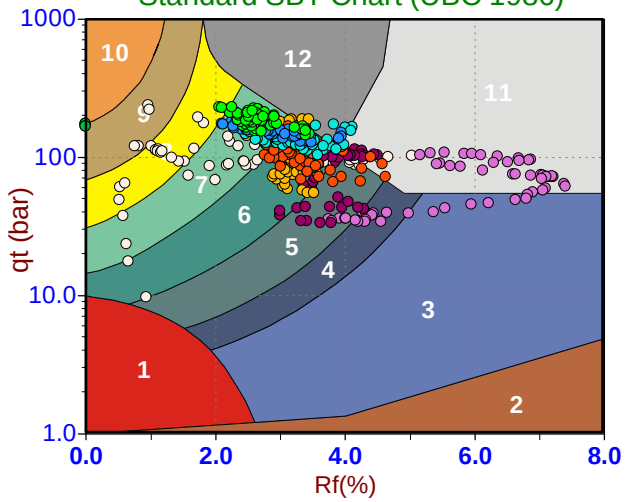

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-05 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT303
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

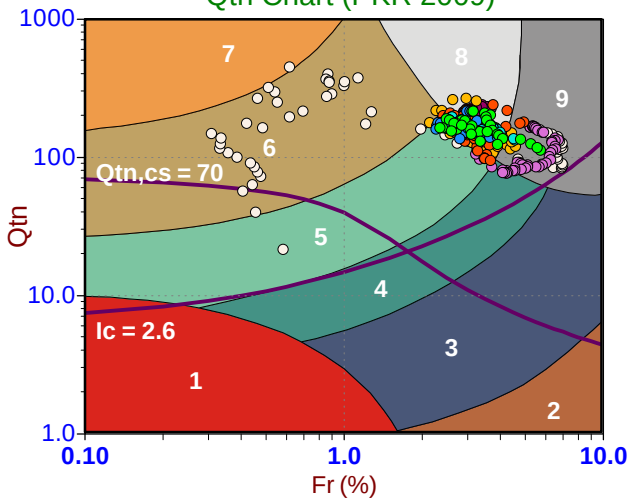

Modified SBTn (PKR 2016)

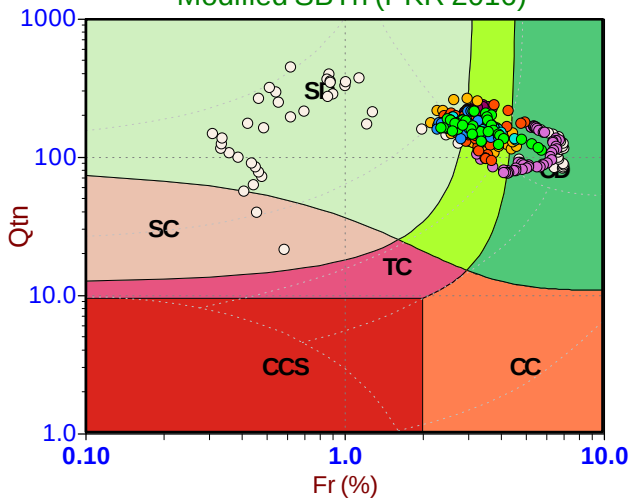

Standard SBT Chart (UBC 1986)

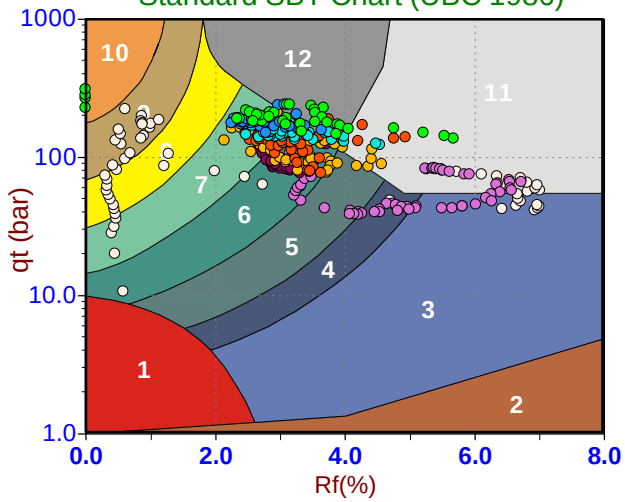

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-05 14:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT304
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

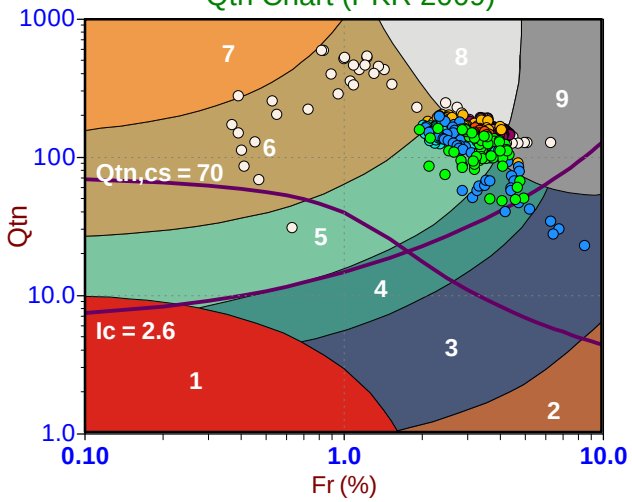

Modified SBTn (PKR 2016)

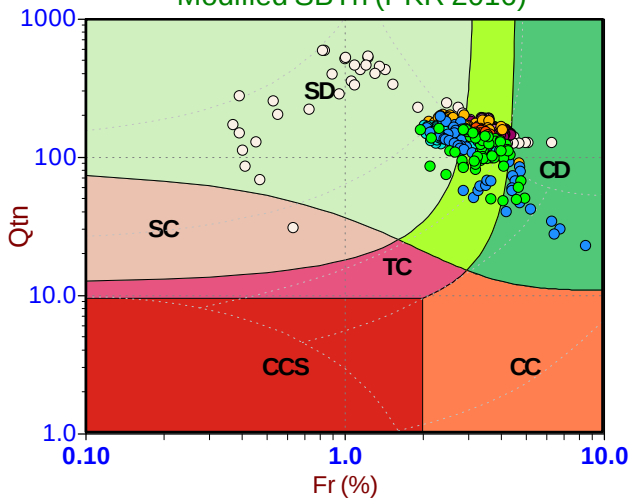

Standard SBT Chart (UBC 1986)

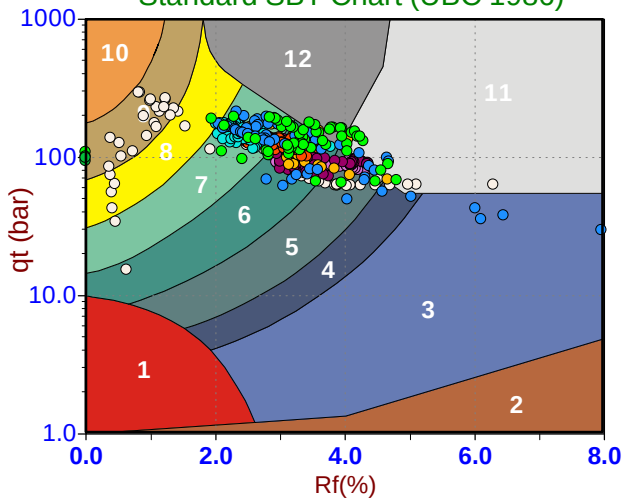

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-05 16:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT305
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

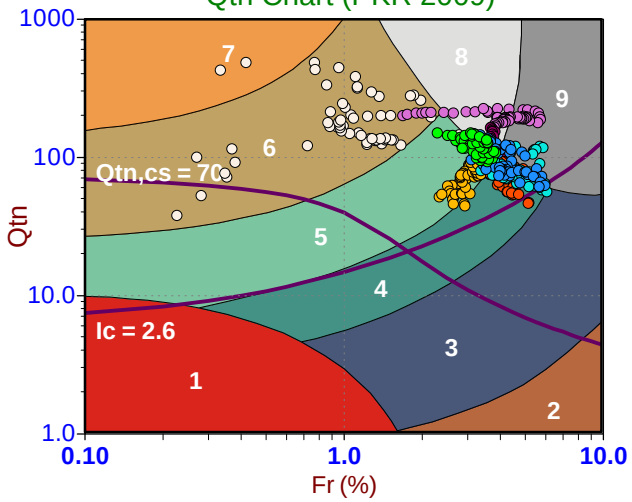

Modified SBTn (PKR 2016)

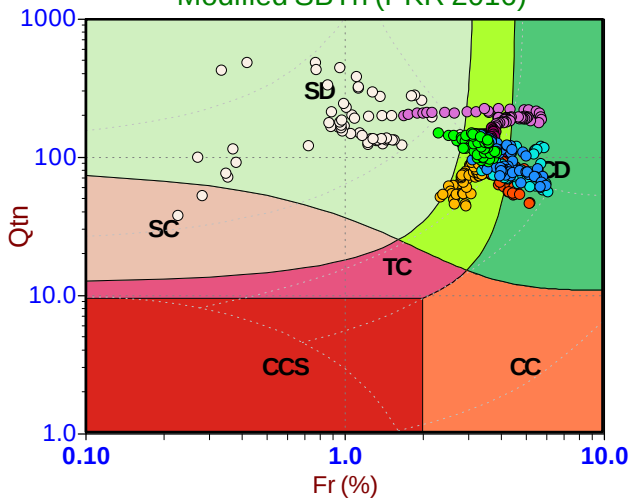

Standard SBT Chart (UBC 1986)

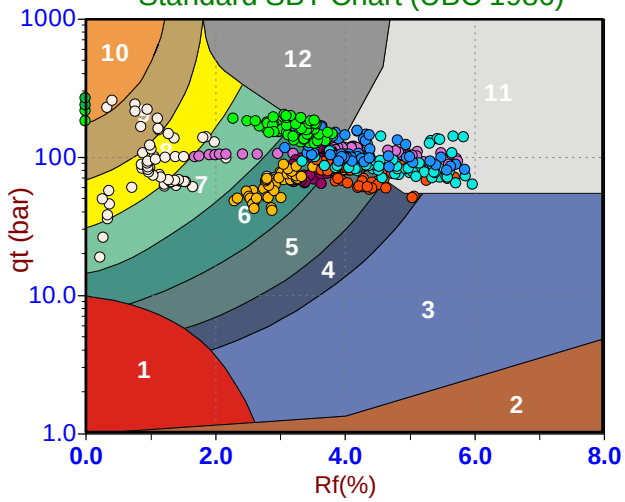

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-06 06:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT306
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

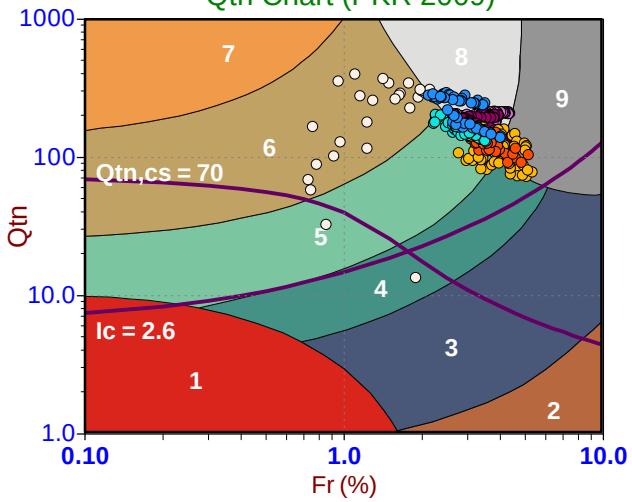

Modified SBTn (PKR 2016)

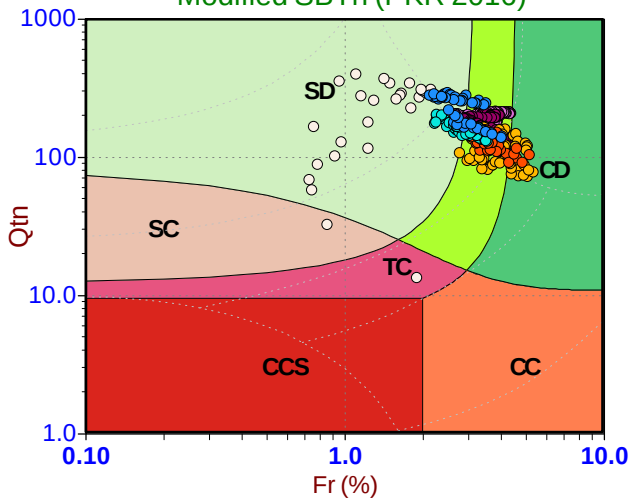

Standard SBT Chart (UBC 1986)

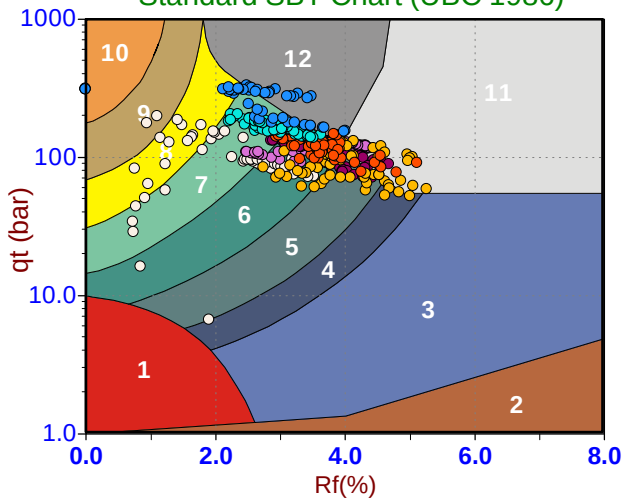

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-06 09:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT307
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

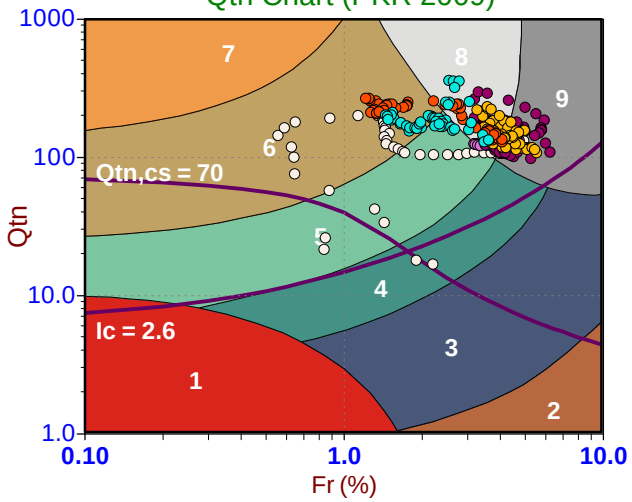

Modified SBTn (PKR 2016)

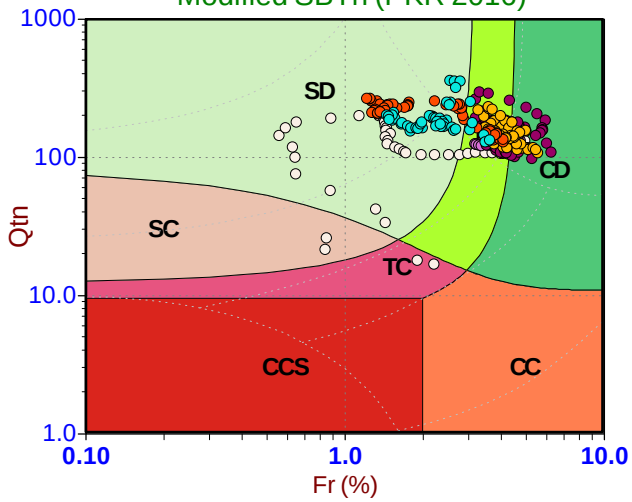

Standard SBT Chart (UBC 1986)

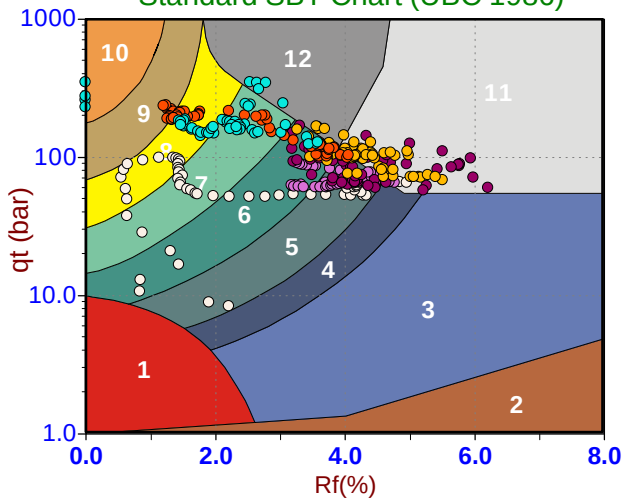

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-06 10:11
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT308
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

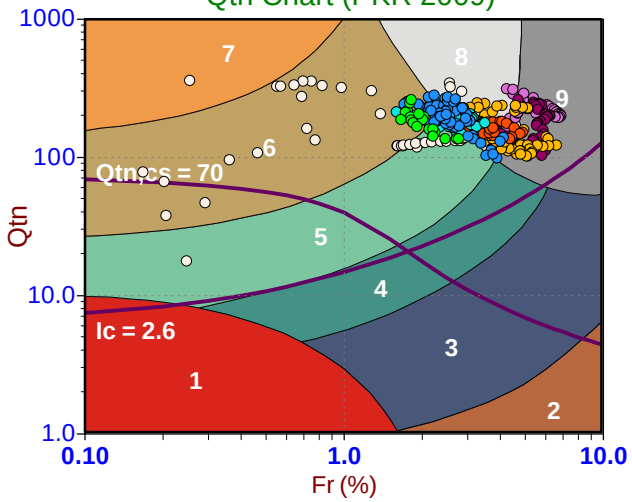

Modified SBTn (PKR 2016)

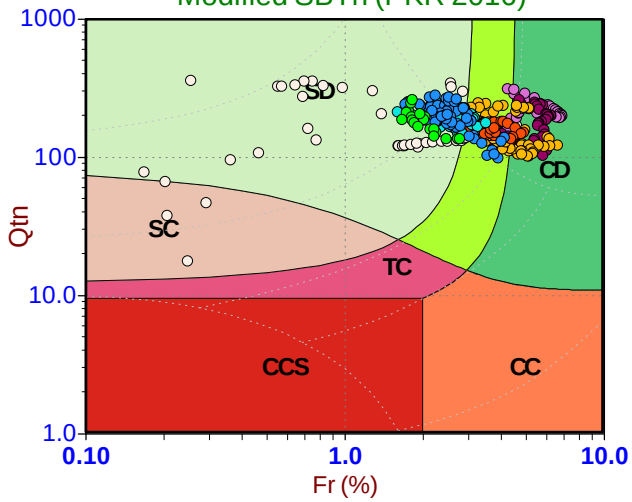

Standard SBT Chart (UBC 1986)

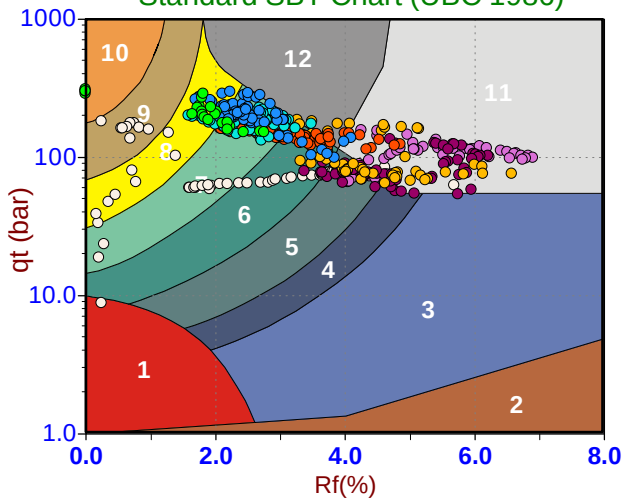

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-06 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT309
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

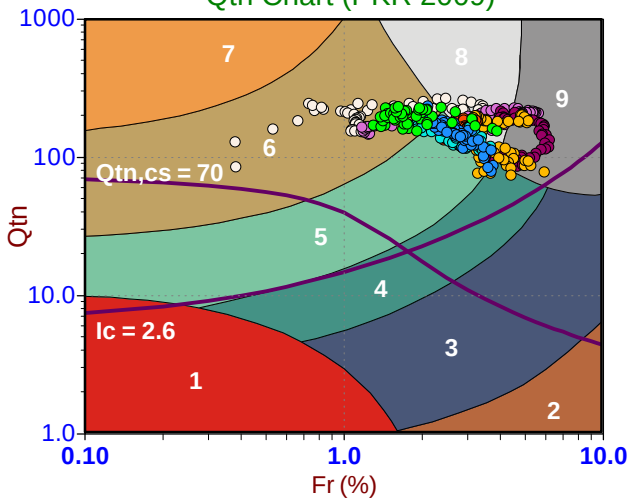

Modified SBTn (PKR 2016)

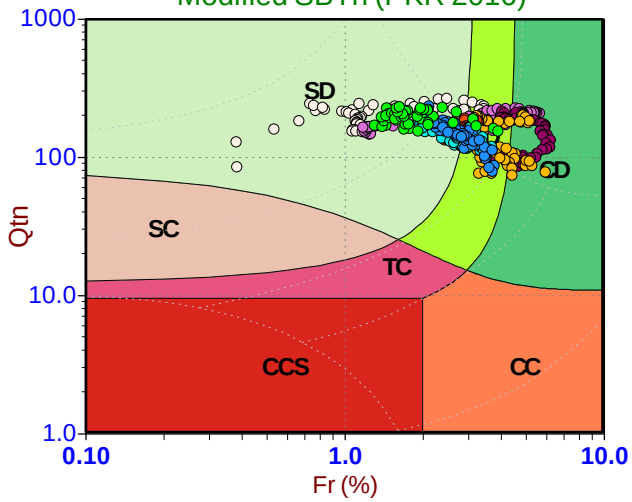

Standard SBT Chart (UBC 1986)

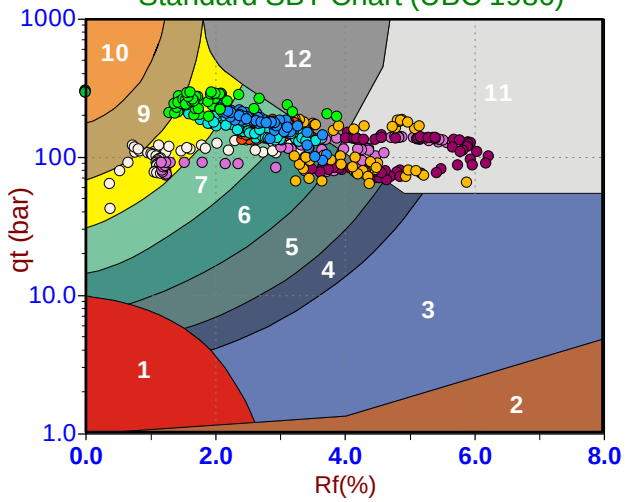

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-06 13:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT310
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

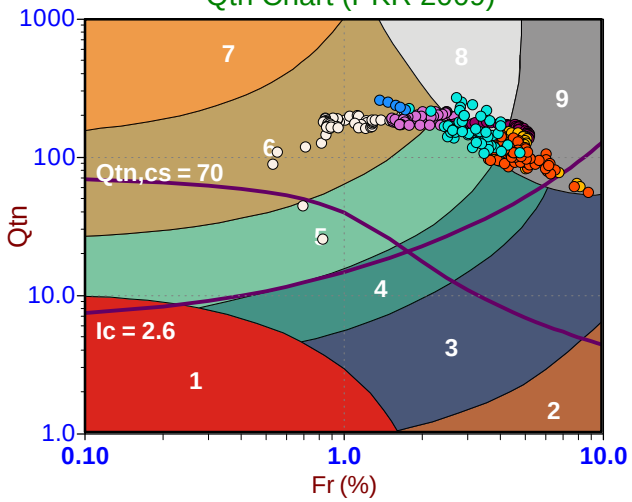

Modified SBTn (PKR 2016)

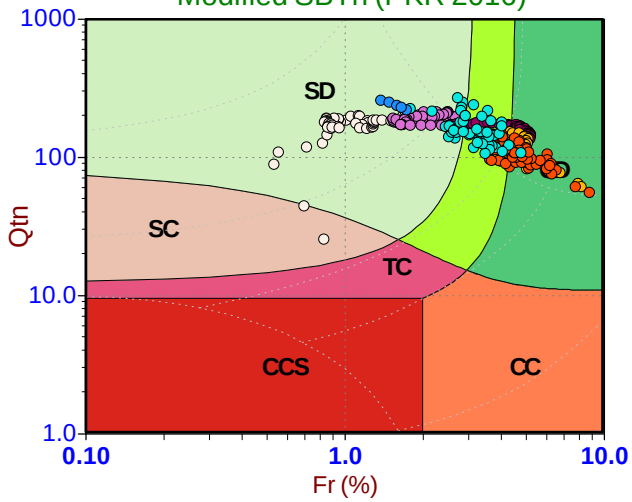

Standard SBT Chart (UBC 1986)

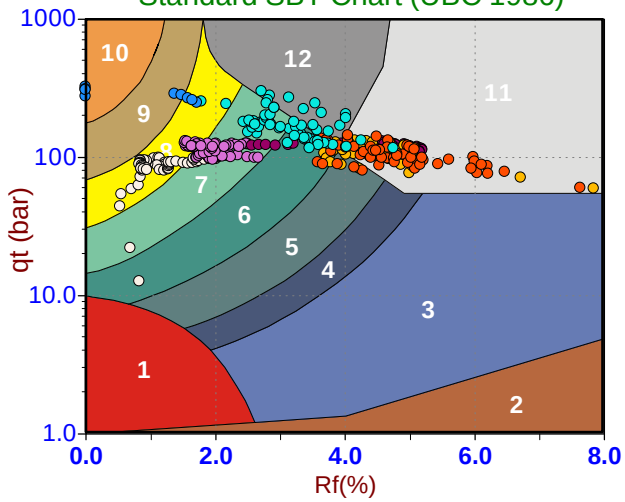

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-06 15:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT311
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

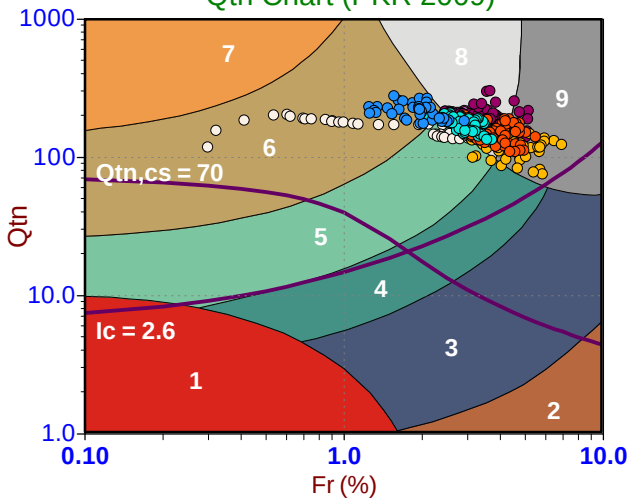

Modified SBTn (PKR 2016)

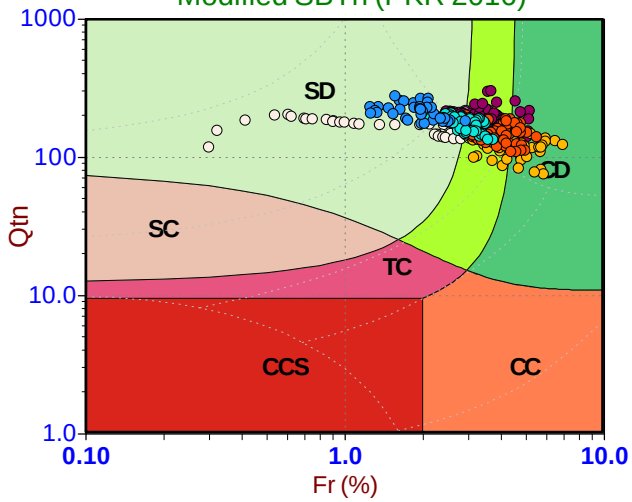

Standard SBT Chart (UBC 1986)

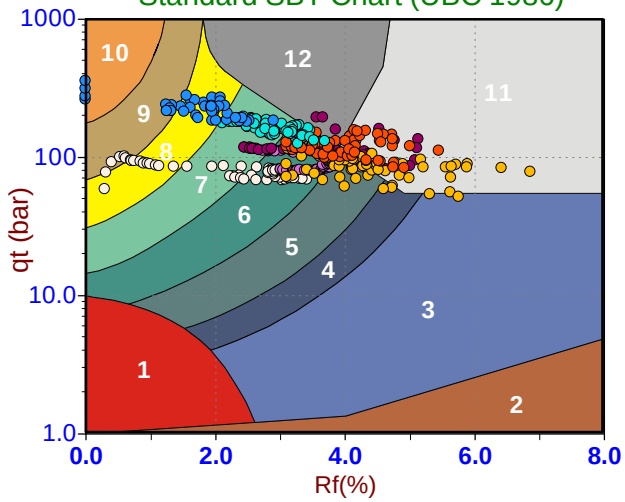

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-06 17:01
Site: Brooks, Alberta

Sounding: RCPT22-22CPT312
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

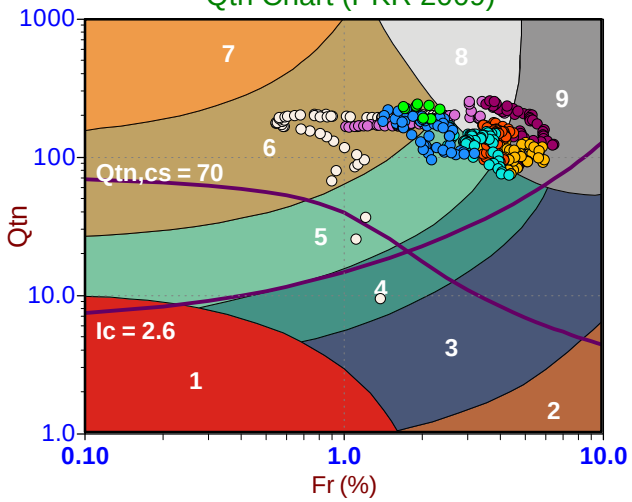

Modified SBTn (PKR 2016)

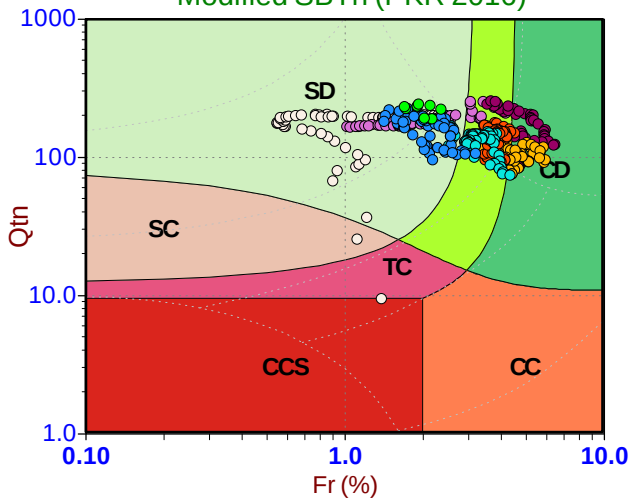

Standard SBT Chart (UBC 1986)

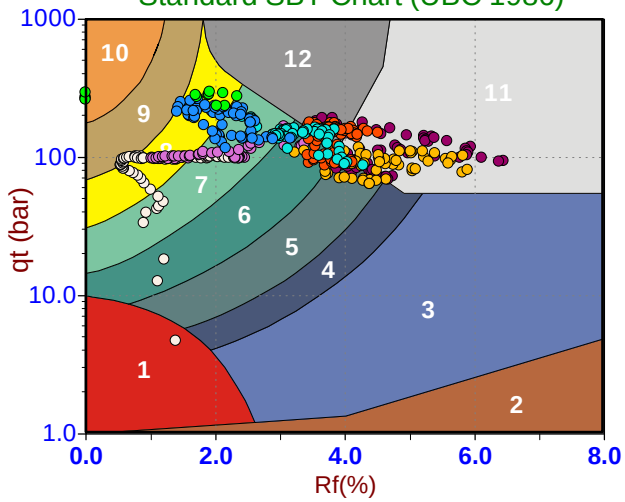

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-07 08:55
Site: Brooks, Alberta

Sounding: RCPT22-22CPT313
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

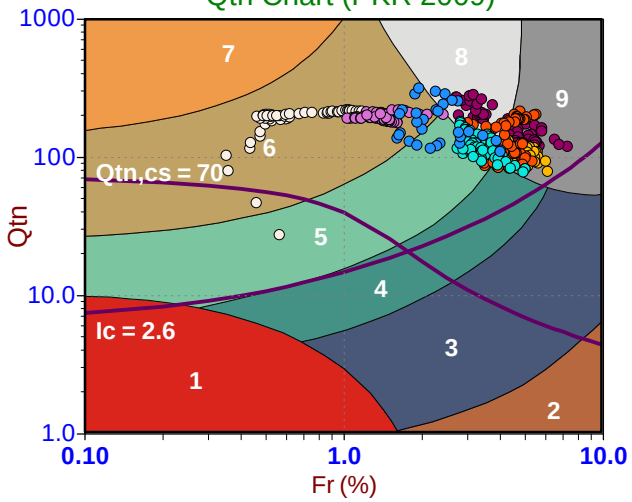

Modified SBTn (PKR 2016)

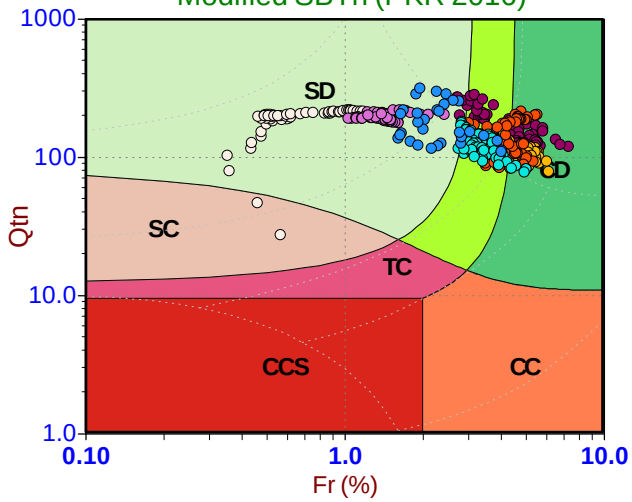

Standard SBT Chart (UBC 1986)

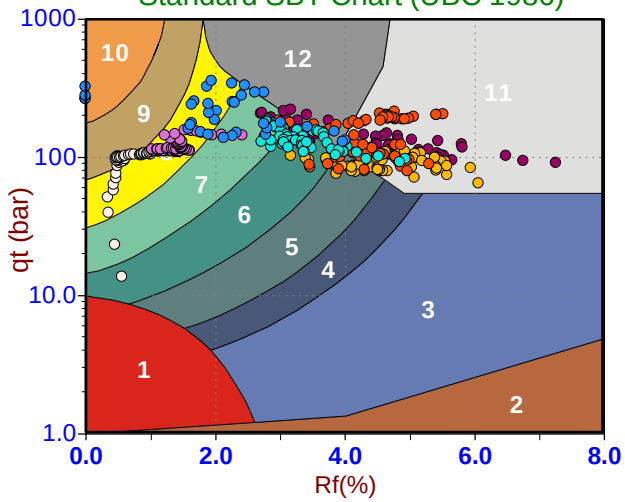

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-07 09:56
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT314
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

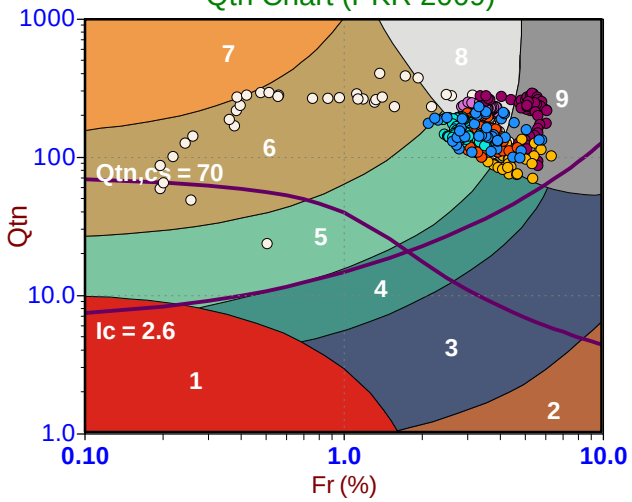

Modified SBTn (PKR 2016)

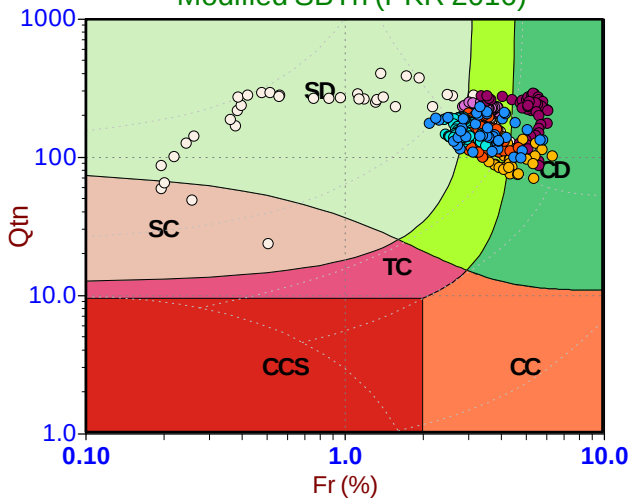

Standard SBT Chart (UBC 1986)

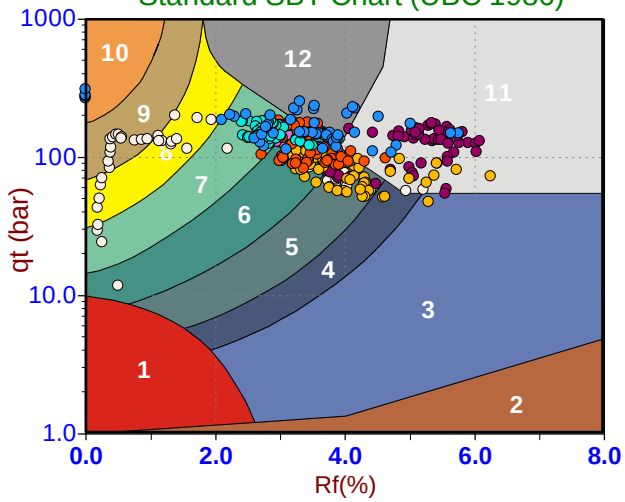

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-07 12:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT315
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

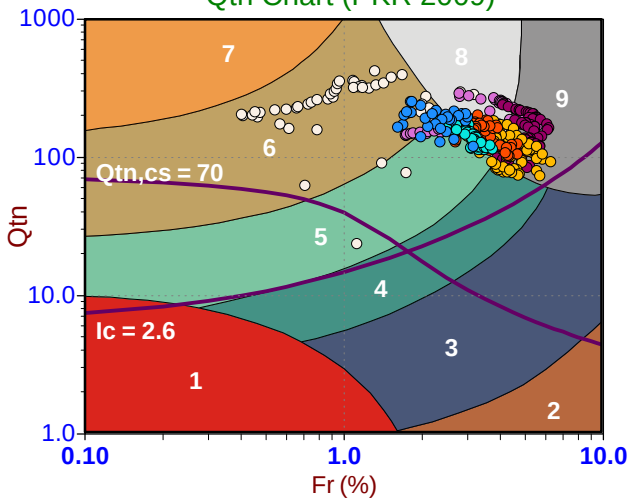

Modified SBTn (PKR 2016)

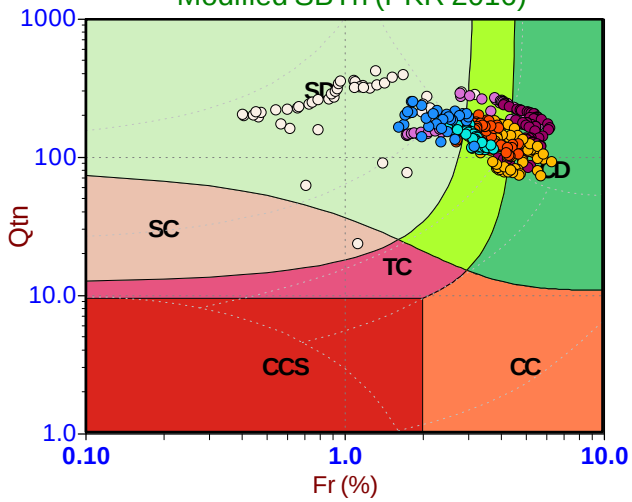

Standard SBT Chart (UBC 1986)

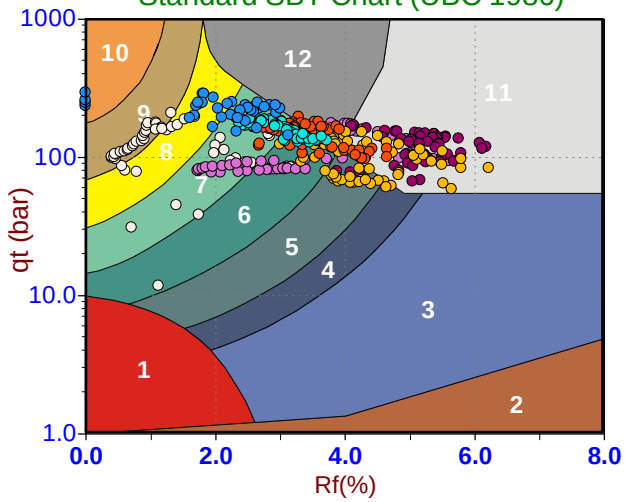

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-07 13:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT316
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

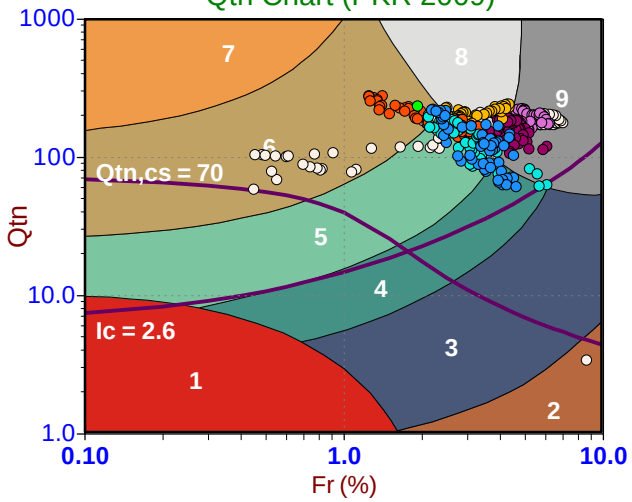

Modified SBTn (PKR 2016)

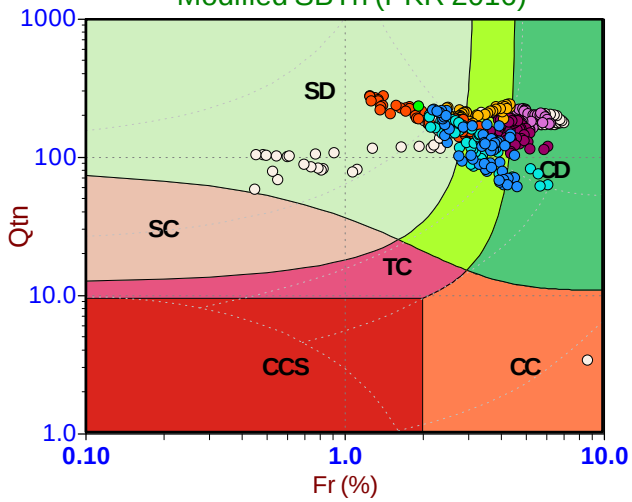

Standard SBT Chart (UBC 1986)

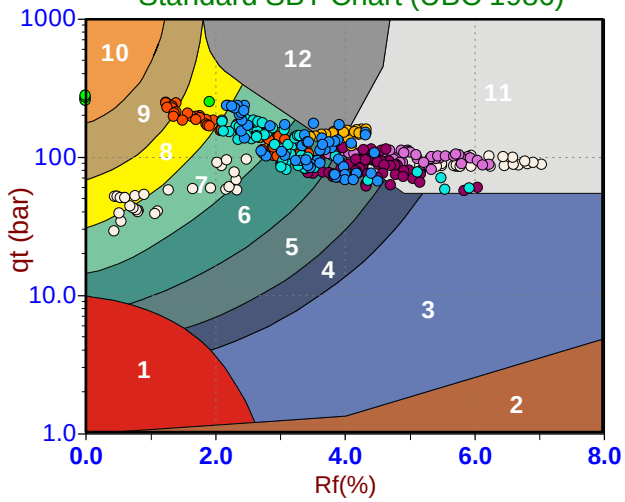

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-07 14:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT317
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

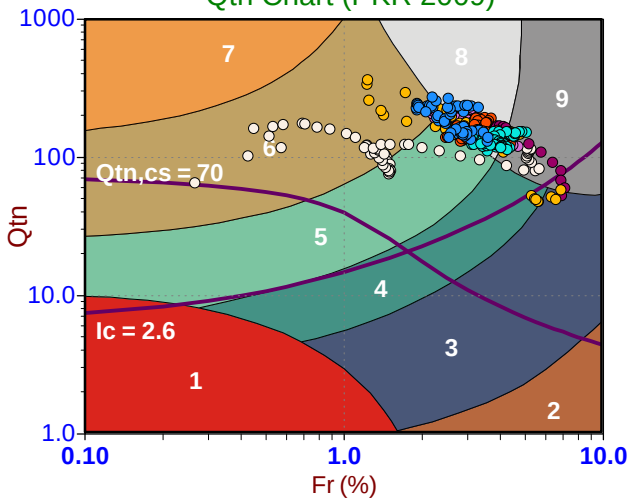

Modified SBTn (PKR 2016)

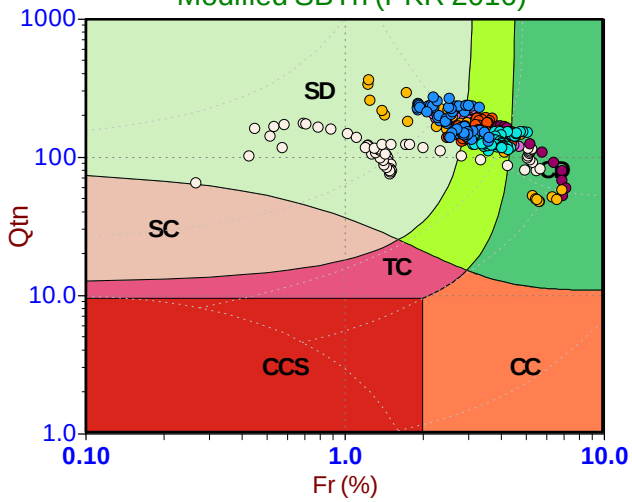

Standard SBT Chart (UBC 1986)

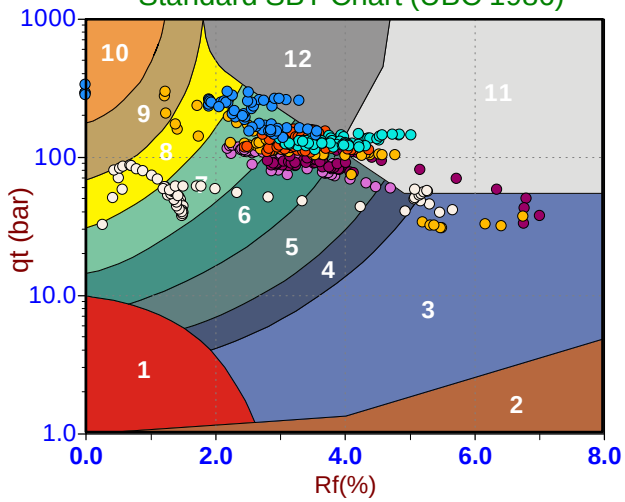

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-07 15:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT318
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

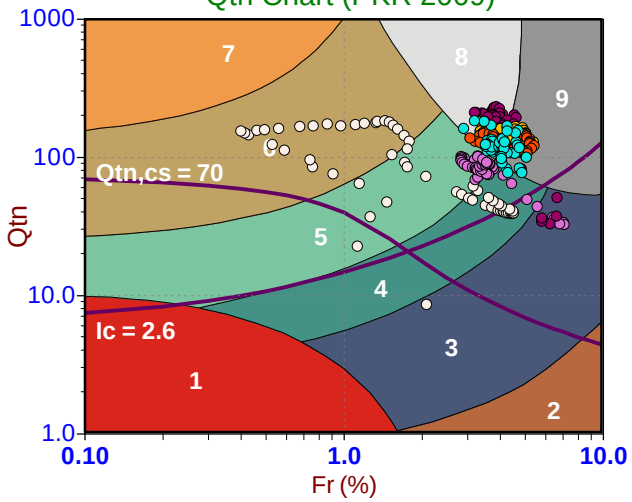

Modified SBTn (PKR 2016)

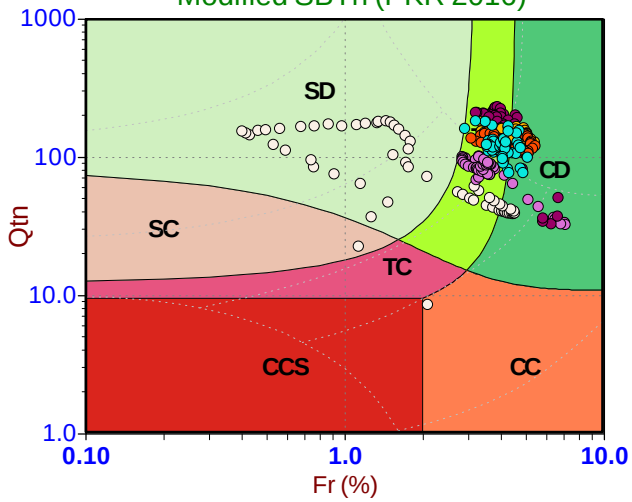

Standard SBT Chart (UBC 1986)

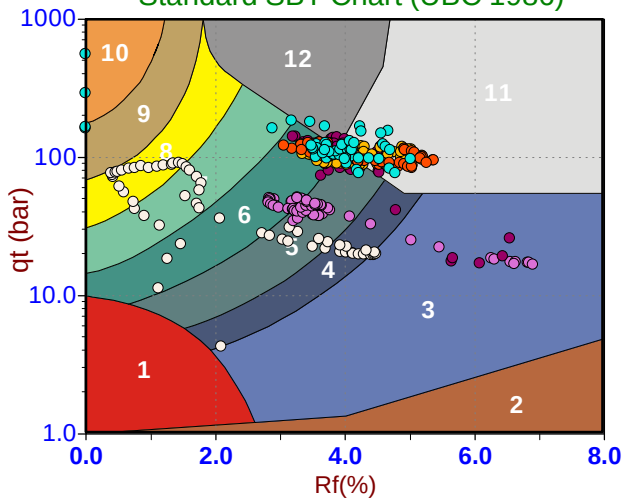

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 07:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT319
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

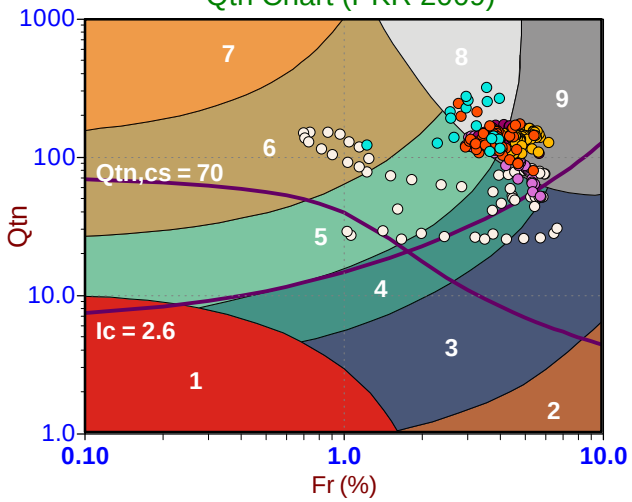

Modified SBTn (PKR 2016)

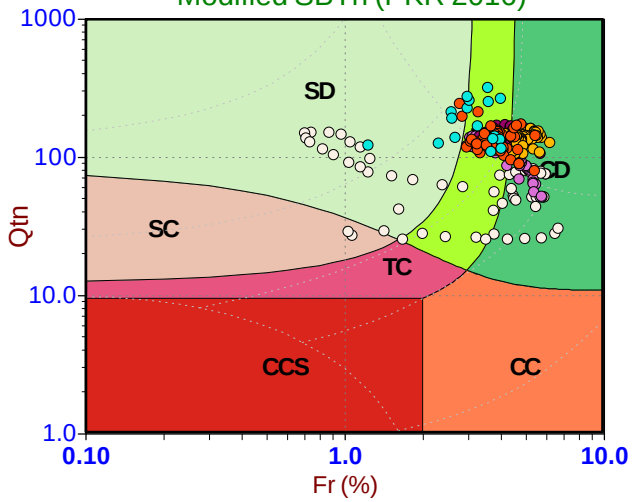

Standard SBT Chart (UBC 1986)

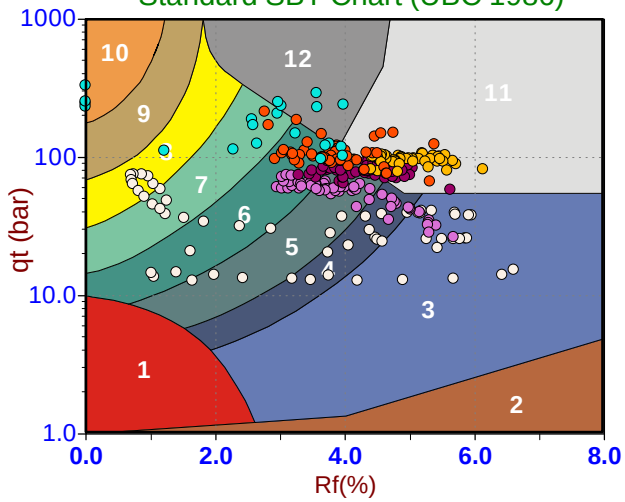

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 08:23
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT320
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

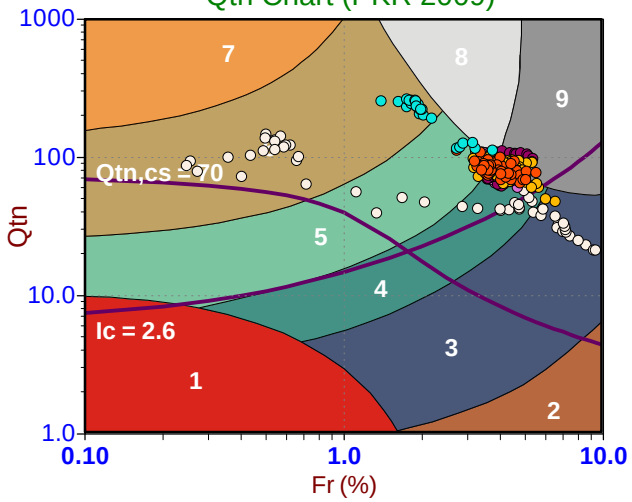

Modified SBTn (PKR 2016)

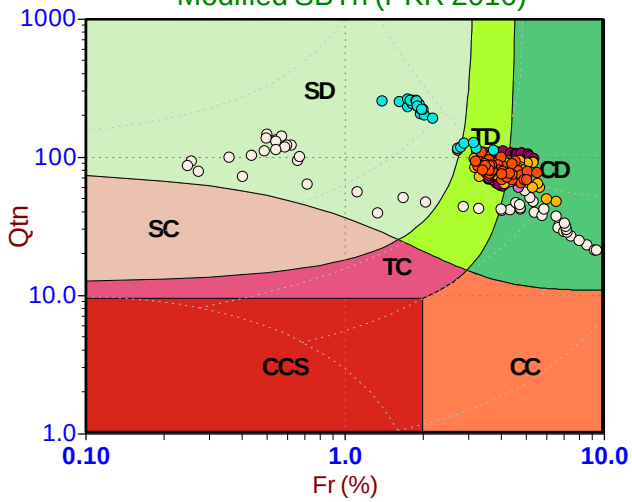

Standard SBT Chart (UBC 1986)

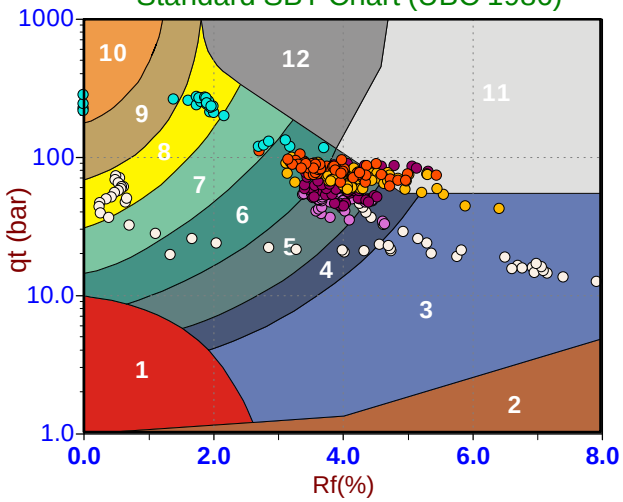

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 10:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT321
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

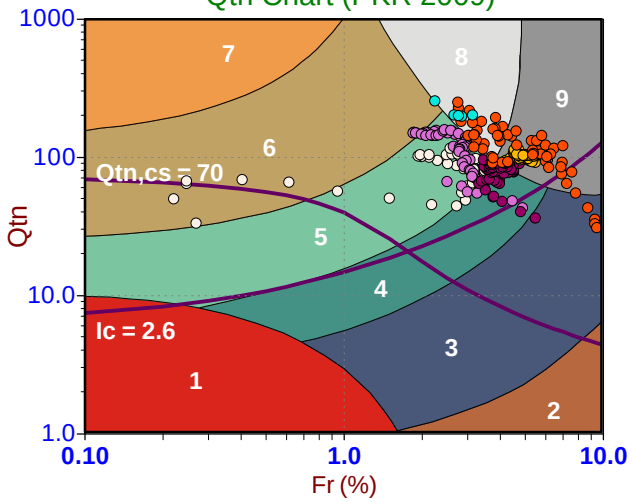

Modified SBTn (PKR 2016)

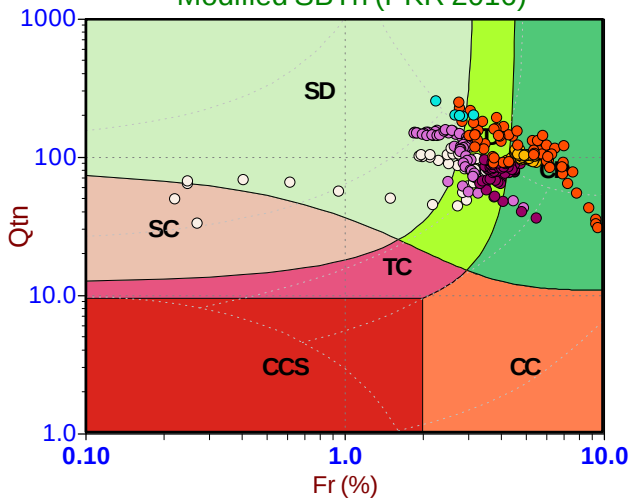

Standard SBT Chart (UBC 1986)

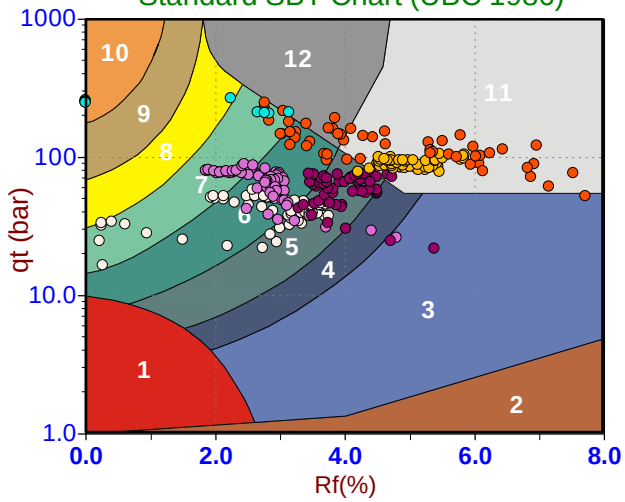

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 11:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT322
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

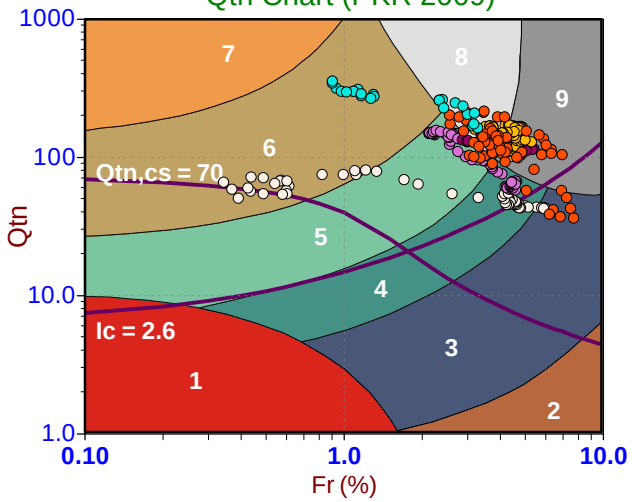

Modified SBTn (PKR 2016)

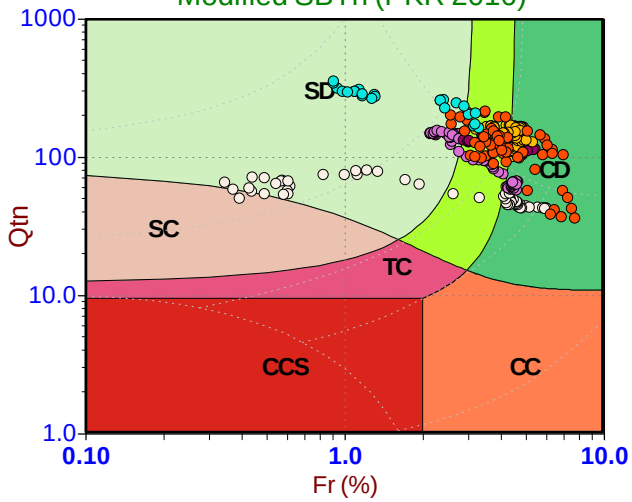

Standard SBT Chart (UBC 1986)

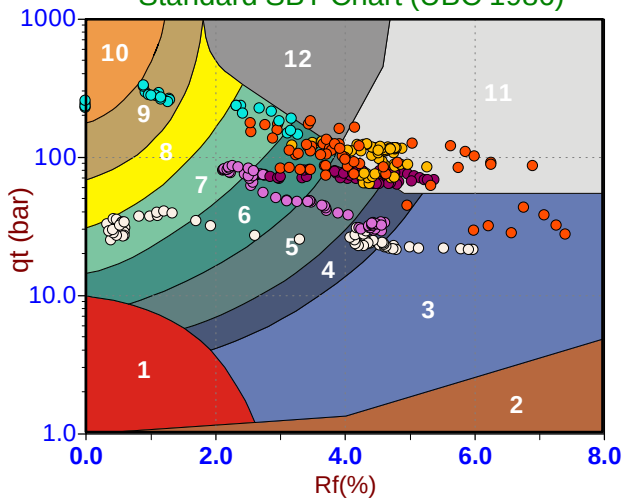

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT323
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

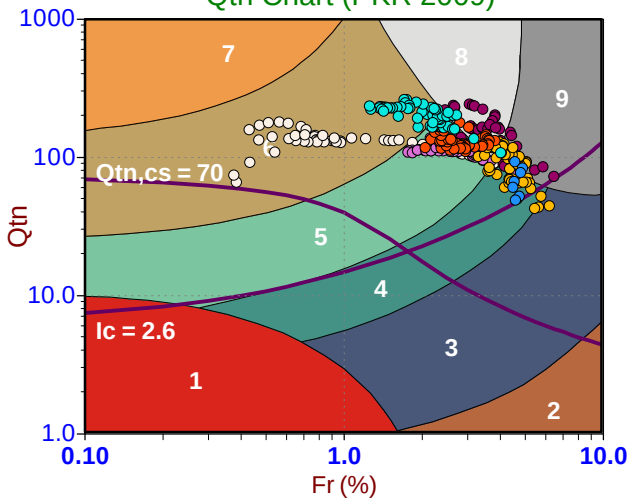

Modified SBTn (PKR 2016)

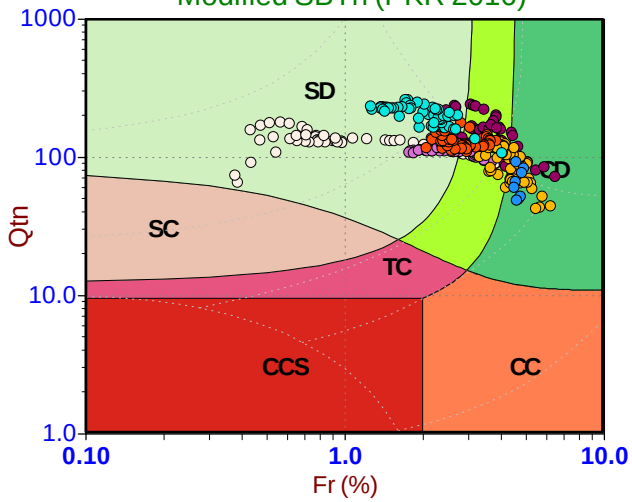

Standard SBT Chart (UBC 1986)

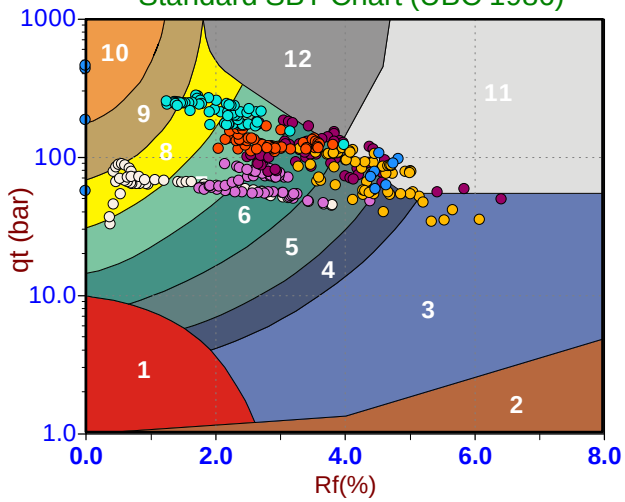

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 13:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT324
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

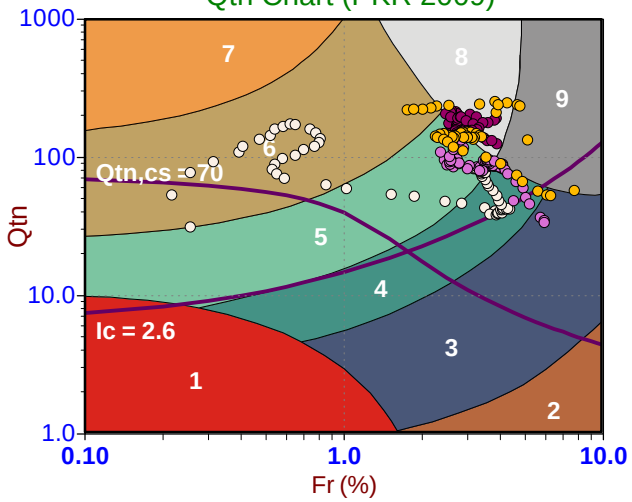

Modified SBTn (PKR 2016)

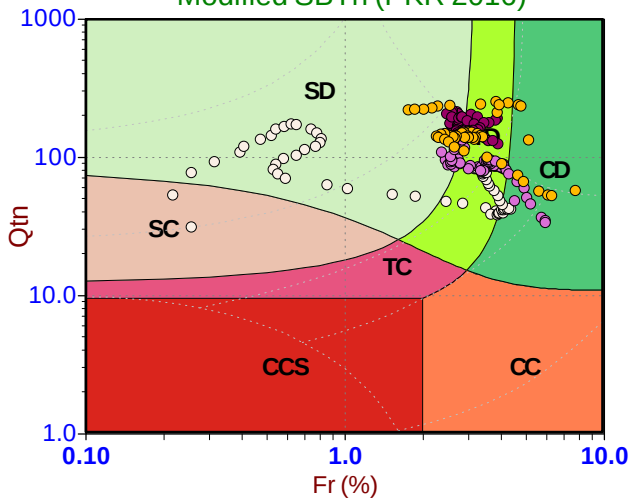

Standard SBT Chart (UBC 1986)

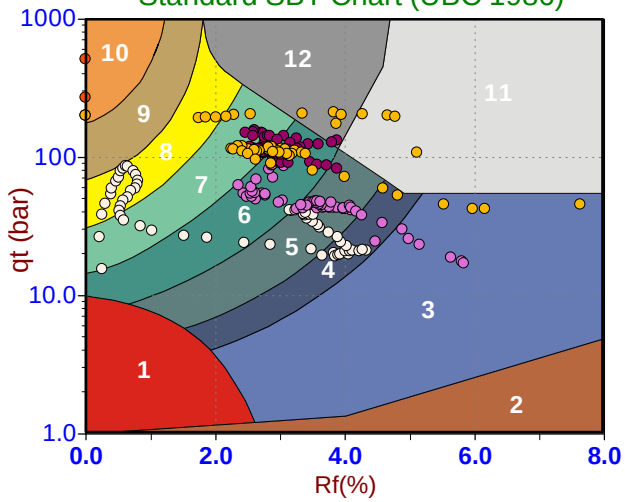

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 16:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT325
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

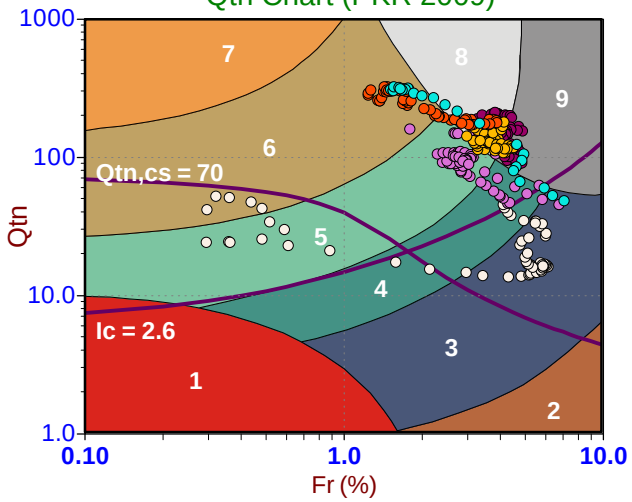

Modified SBTn (PKR 2016)

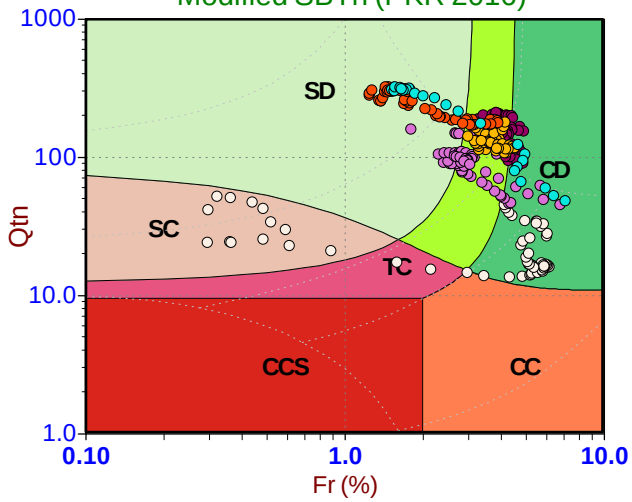

Standard SBT Chart (UBC 1986)

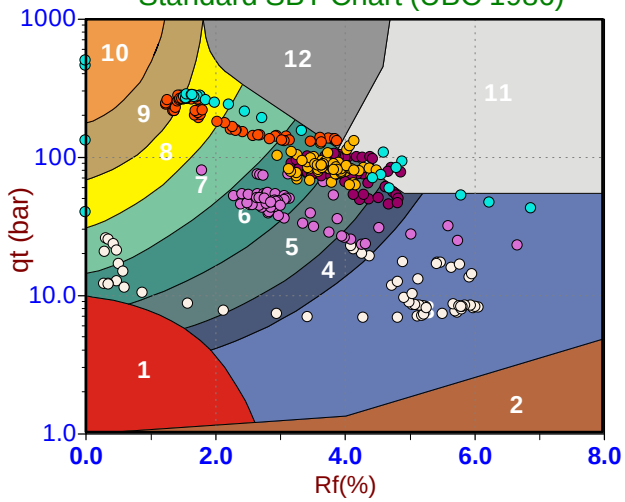

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-09 07:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT326
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

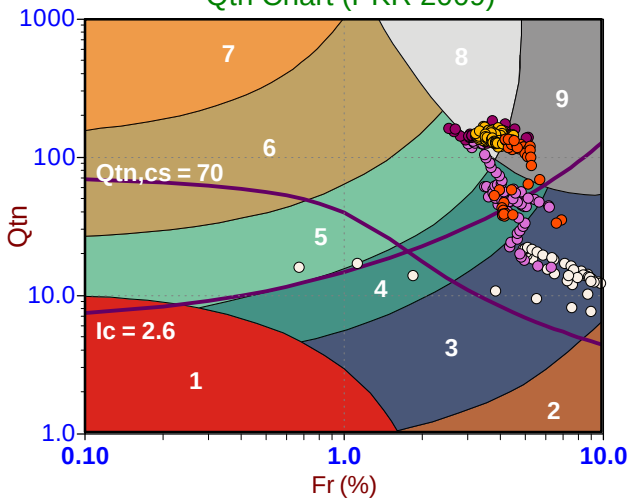

Modified SBTn (PKR 2016)

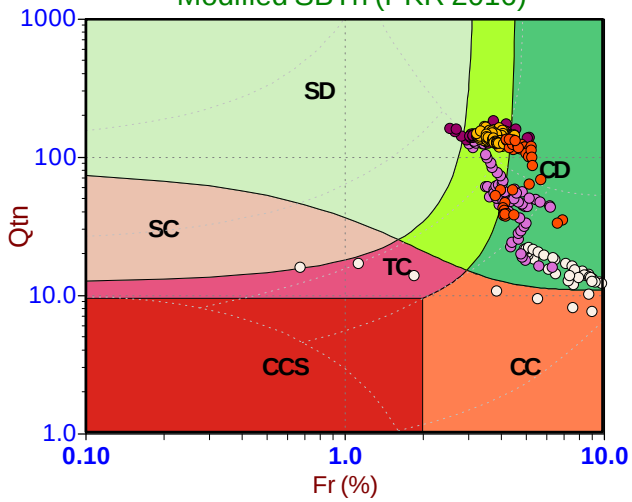

Standard SBT Chart (UBC 1986)

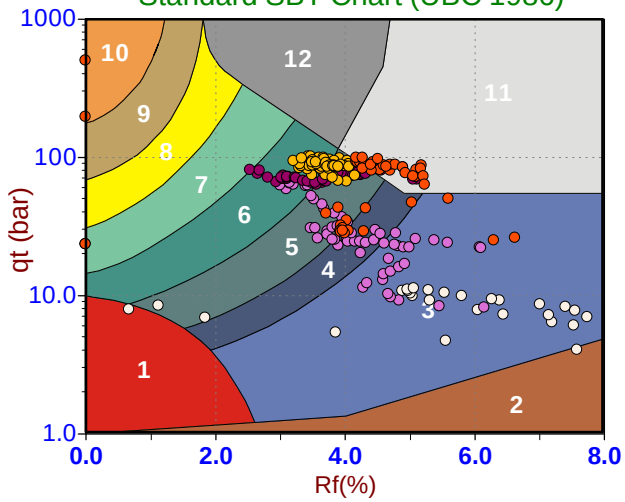

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-09 09:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT327
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

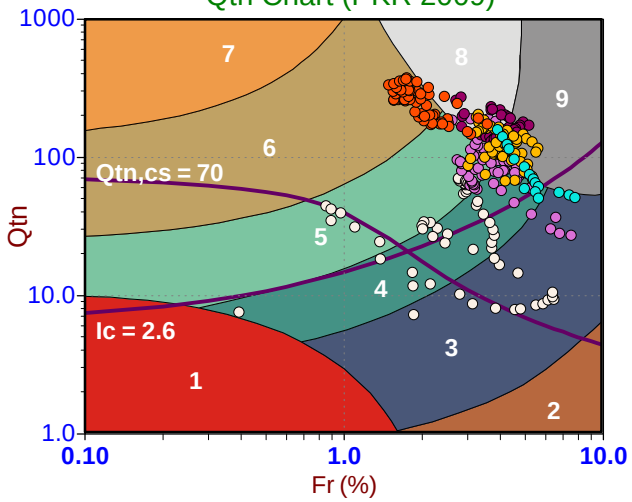

Modified SBTn (PKR 2016)

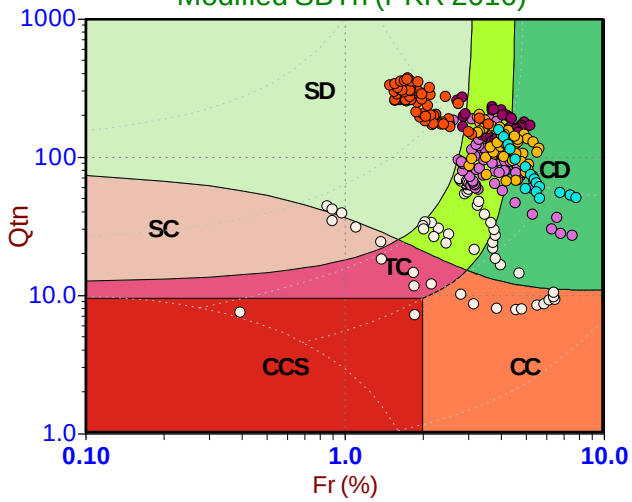

Standard SBT Chart (UBC 1986)

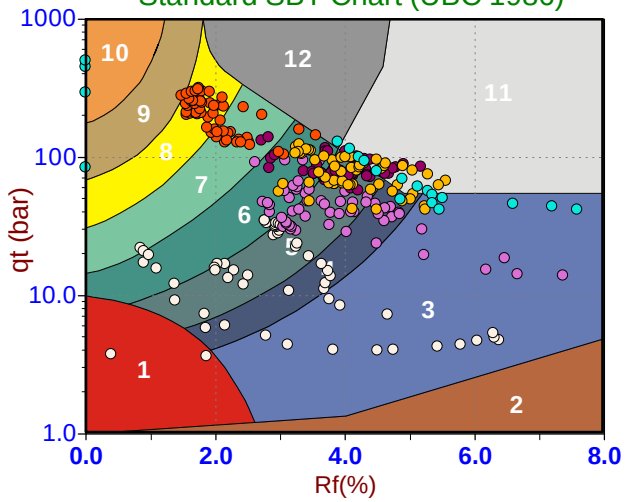

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-09 10:28
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT328
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

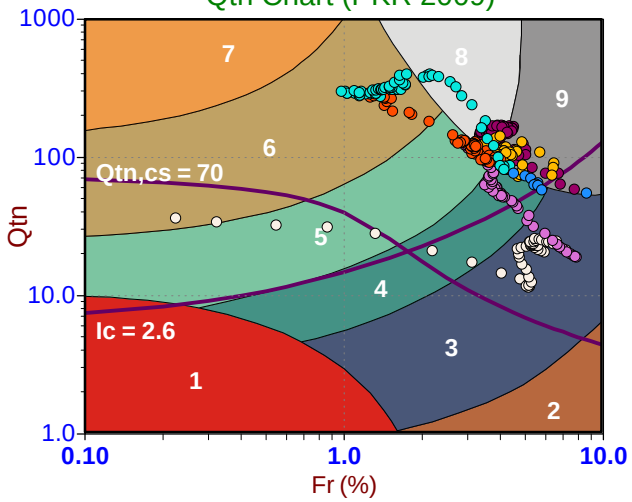

Modified SBTn (PKR 2016)

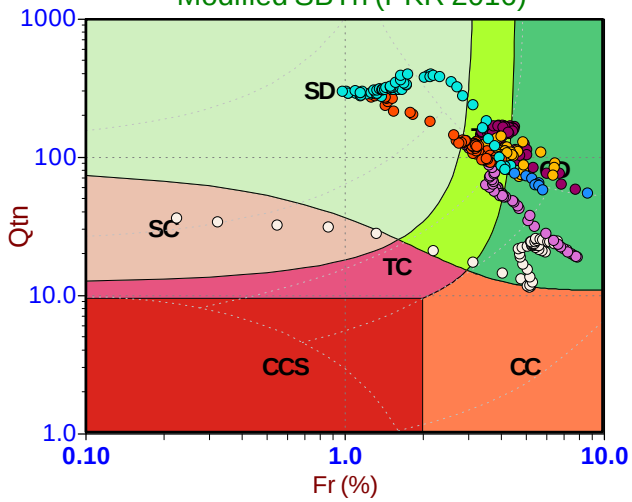

Standard SBT Chart (UBC 1986)

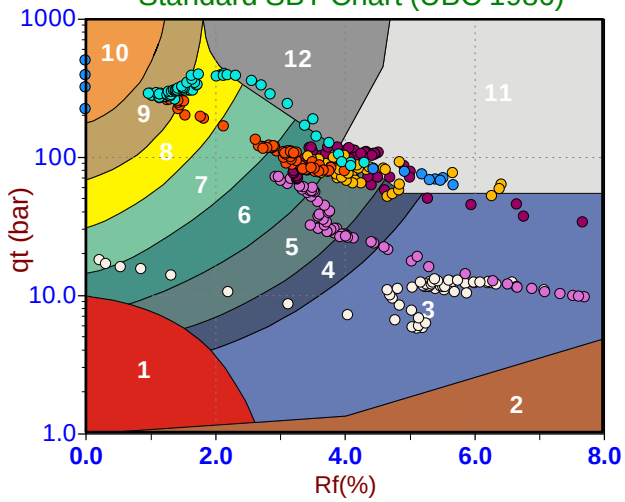

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-09 12:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT329
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

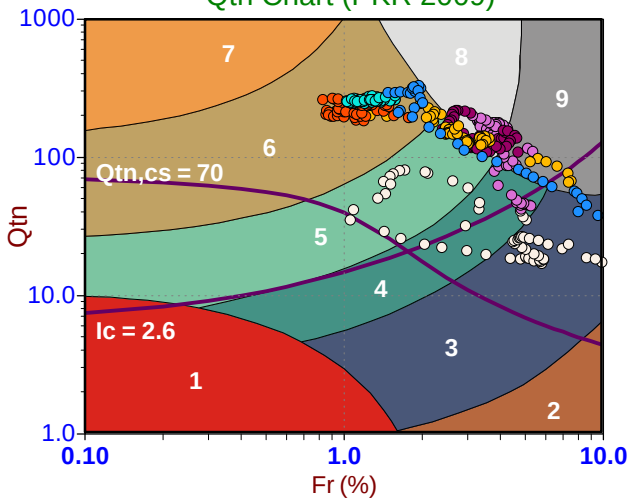

Modified SBTn (PKR 2016)

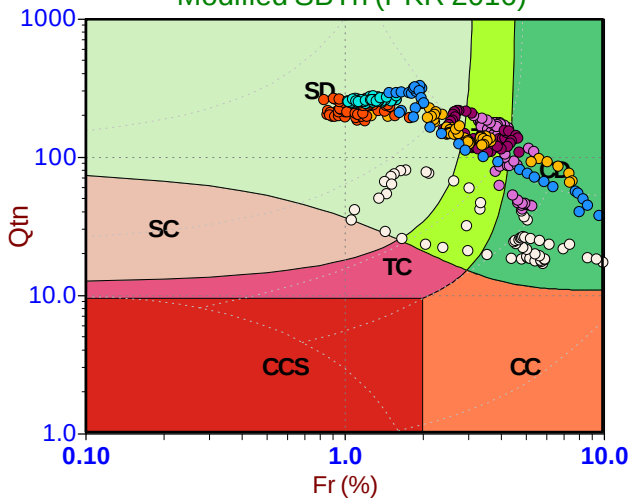

Standard SBT Chart (UBC 1986)

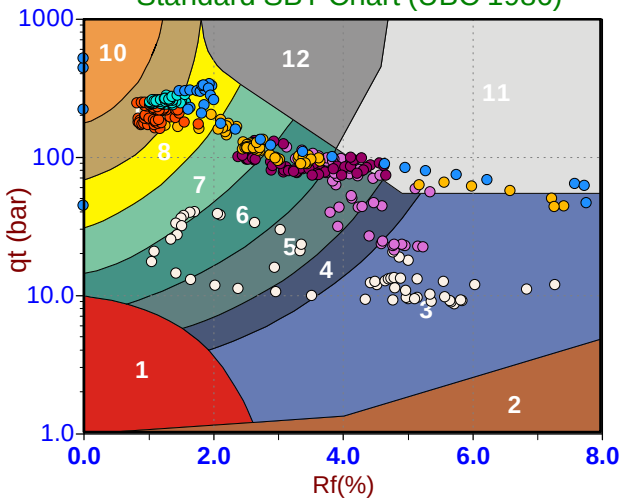

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-09 14:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT330
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

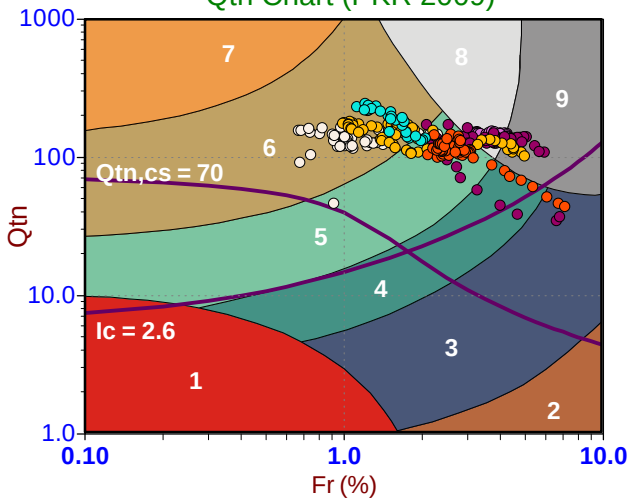

Modified SBTn (PKR 2016)

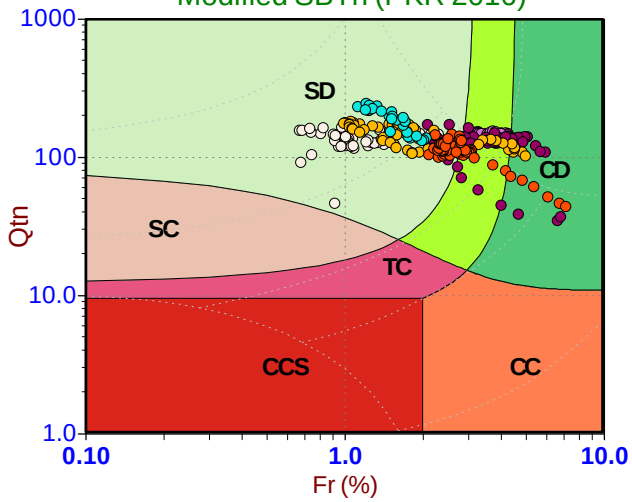

Standard SBT Chart (UBC 1986)

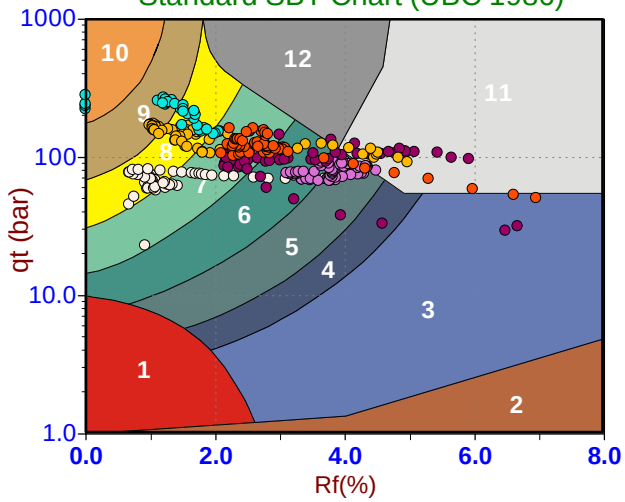

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-09 16:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT331
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

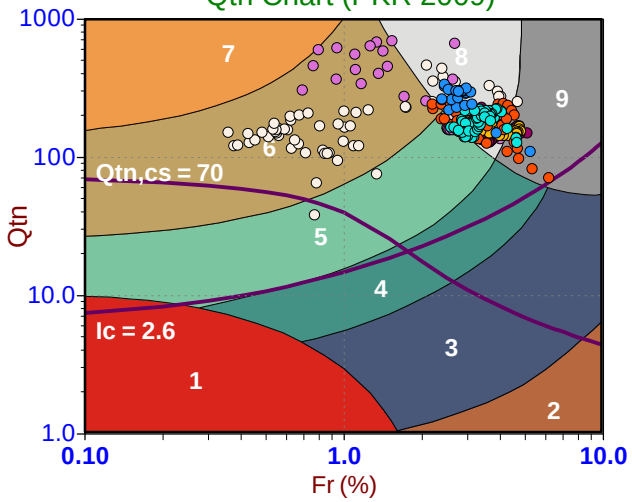

Modified SBTn (PKR 2016)

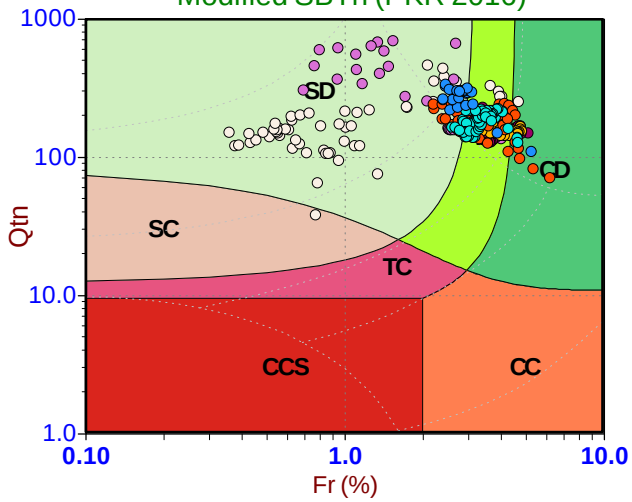

Standard SBT Chart (UBC 1986)

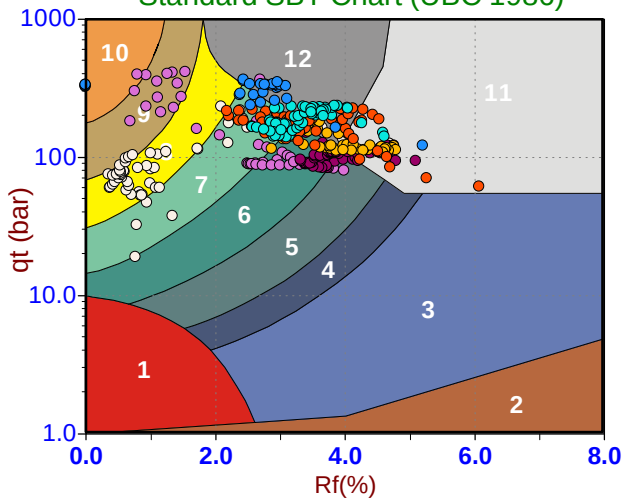

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-11 07:02
Site: Brooks, Alberta

Sounding: RCPT22-22CPT332
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

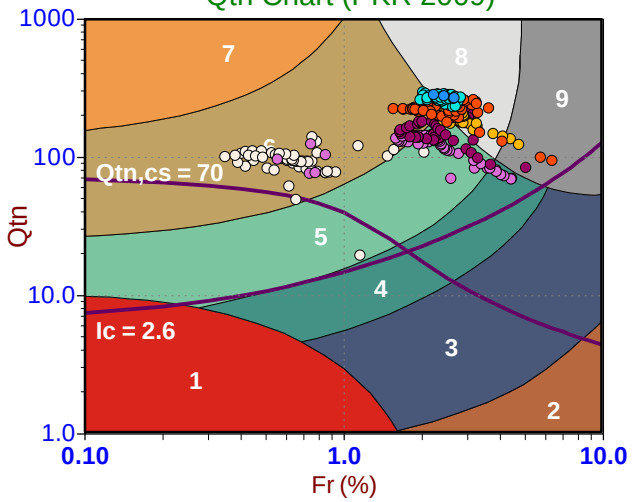

Modified SBTn (PKR 2016)

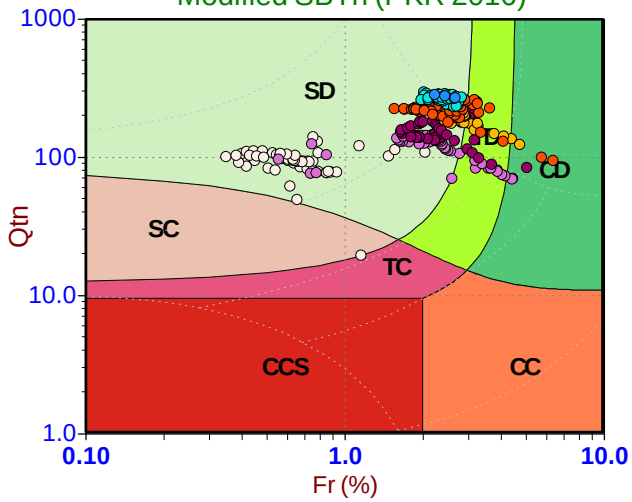

Standard SBT Chart (UBC 1986)

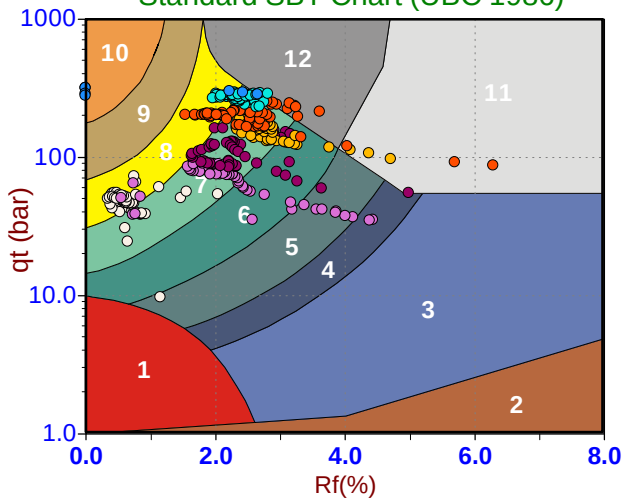

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-11 08:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT333
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

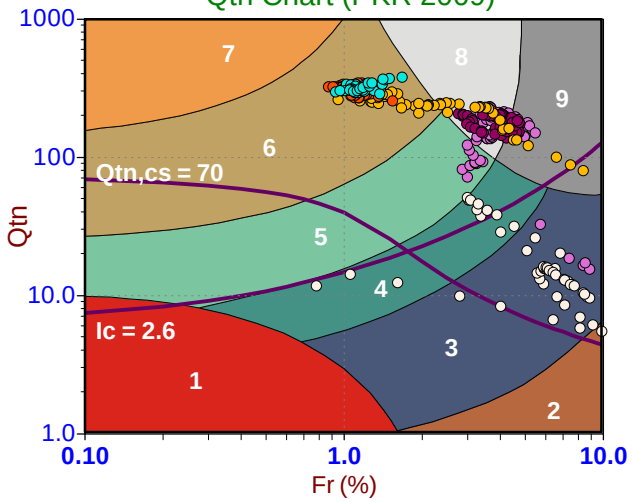

Modified SBTn (PKR 2016)

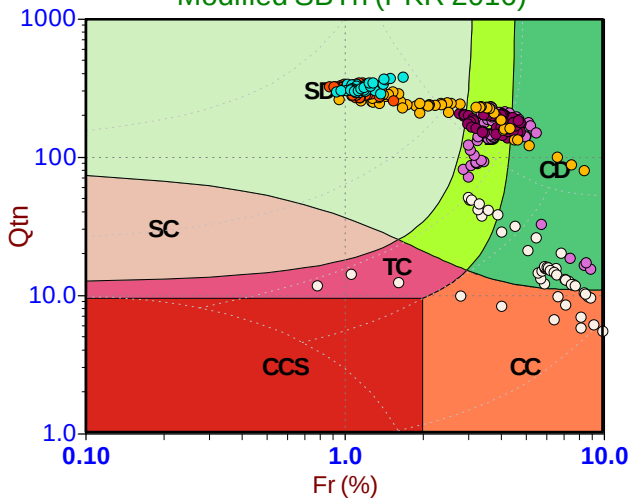

Standard SBT Chart (UBC 1986)

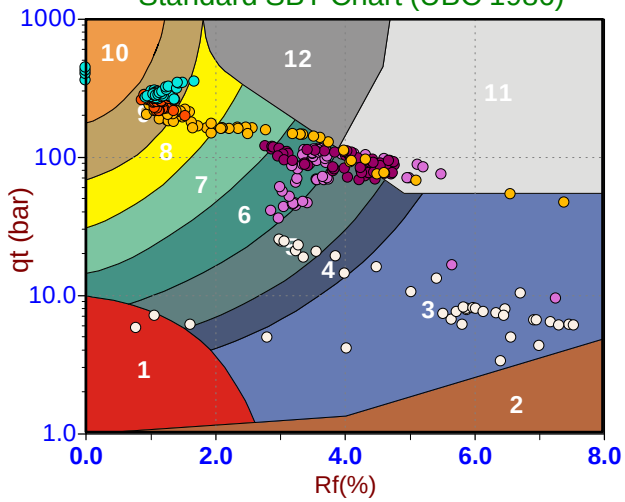

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-11 10:10
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT334
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

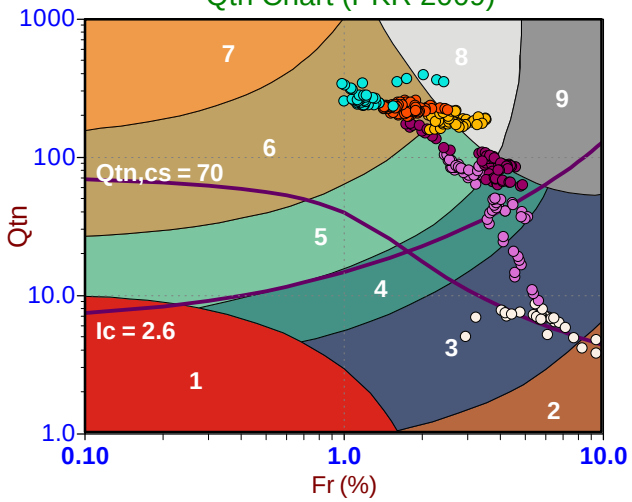

Modified SBTn (PKR 2016)

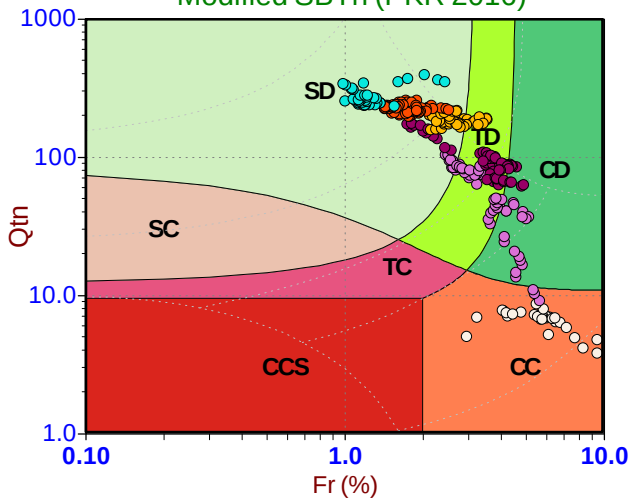

Standard SBT Chart (UBC 1986)

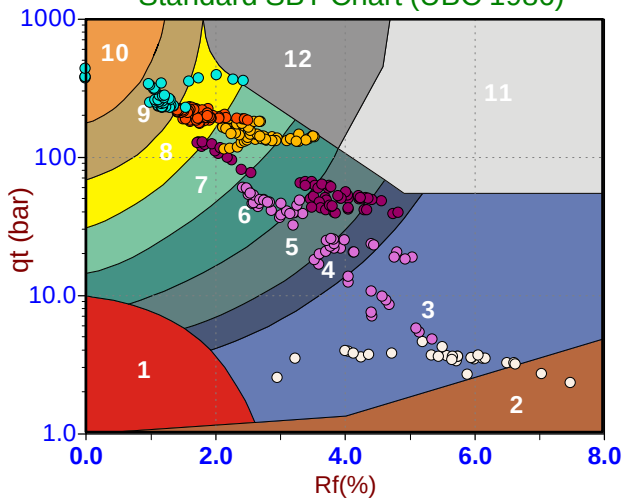

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-11 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT335
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

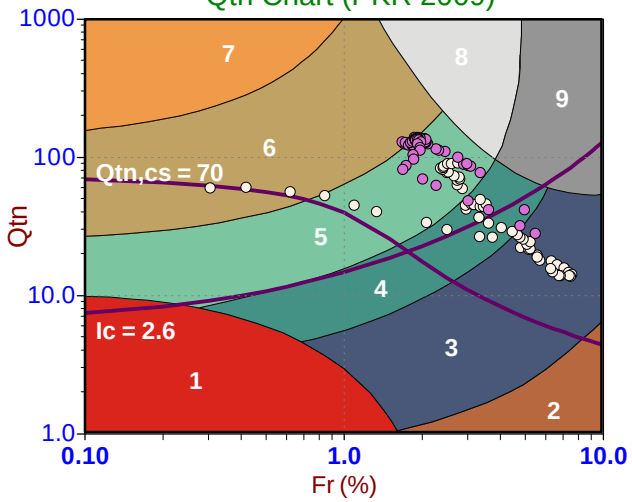

Modified SBTn (PKR 2016)

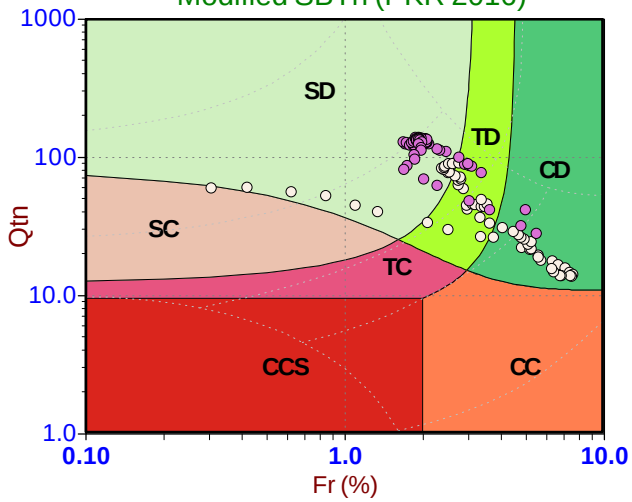

Standard SBT Chart (UBC 1986)

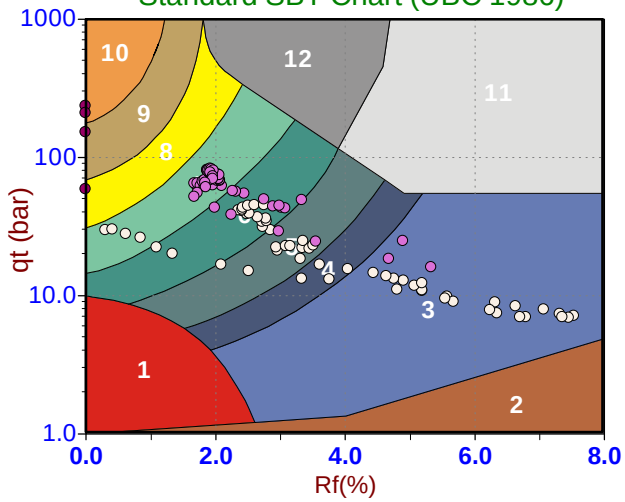

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-11 13:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT335B
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

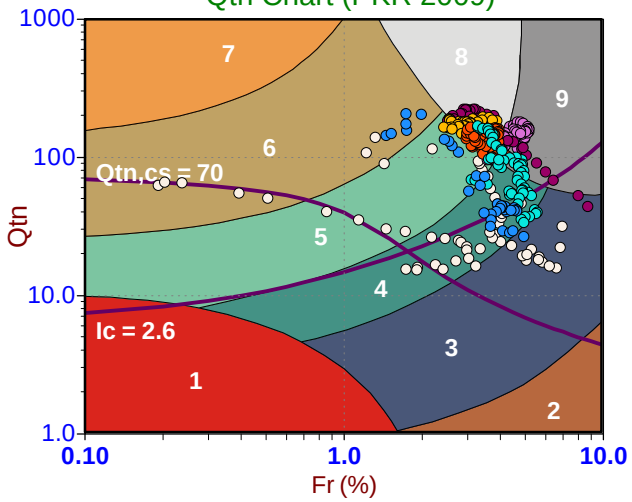

Modified SBTn (PKR 2016)

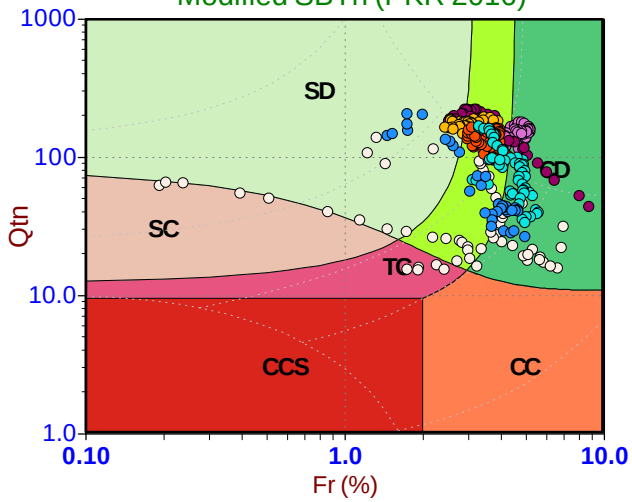

Standard SBT Chart (UBC 1986)

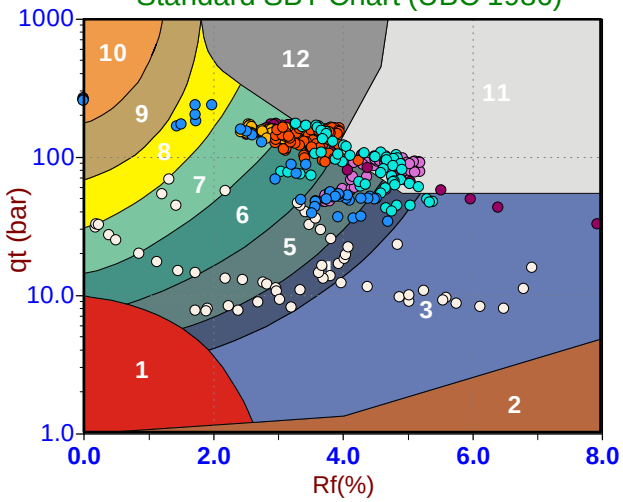

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-11 14:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT336
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

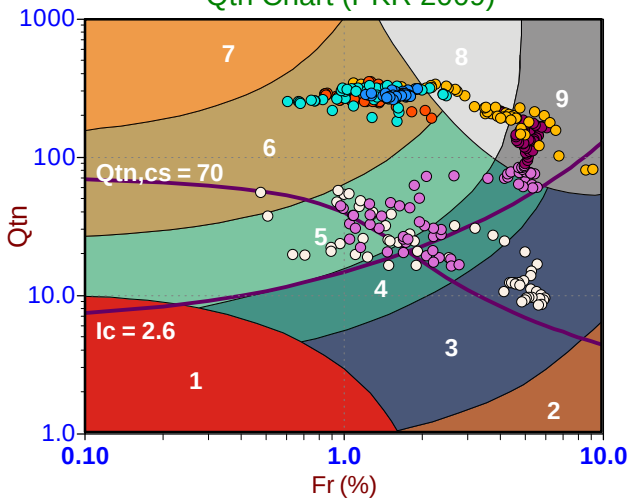

Modified SBTn (PKR 2016)

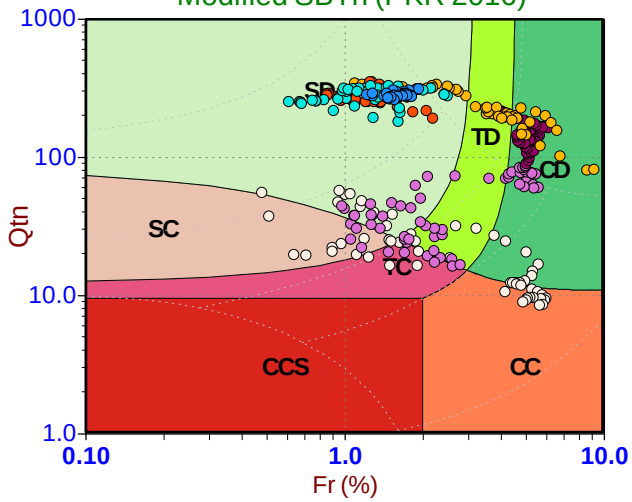

Standard SBT Chart (UBC 1986)

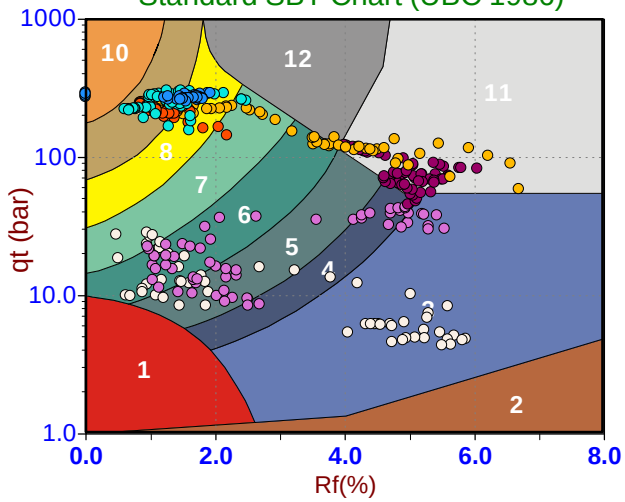

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-11 16:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT337
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

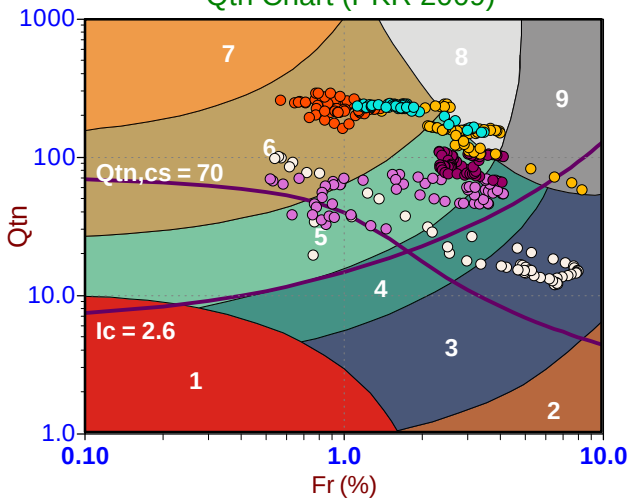

Modified SBTn (PKR 2016)

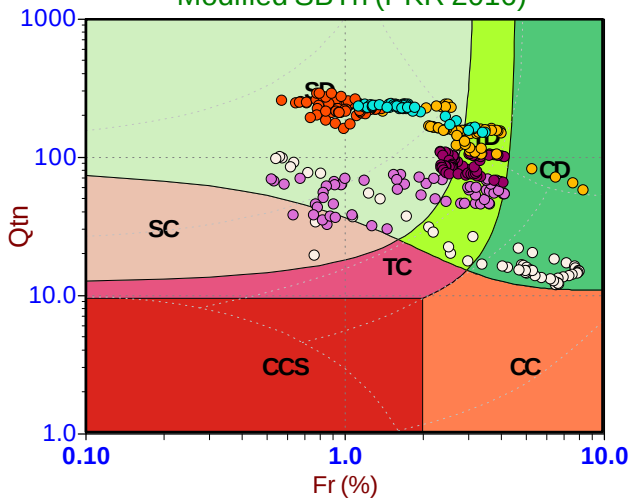

Standard SBT Chart (UBC 1986)

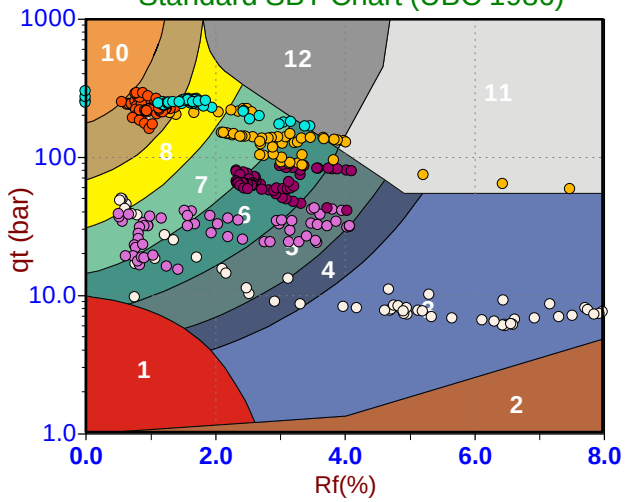

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-12 07:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT338
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

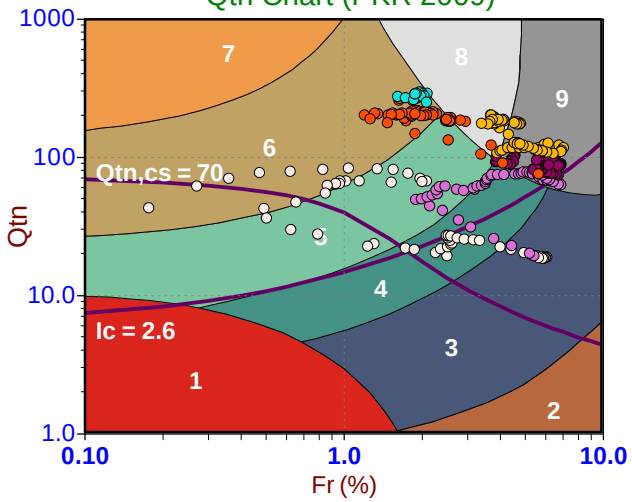

Modified SBTn (PKR 2016)

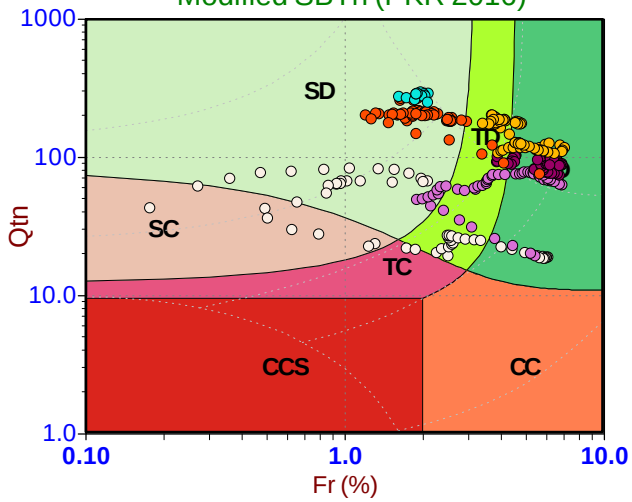

Standard SBT Chart (UBC 1986)

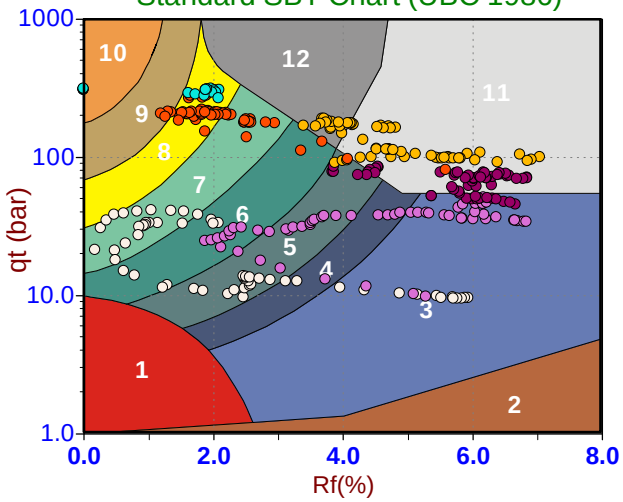

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-12 08:45
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT339
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

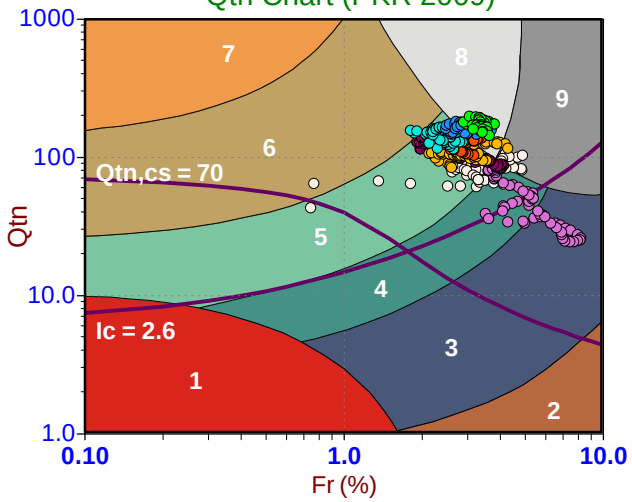

Modified SBTn (PKR 2016)

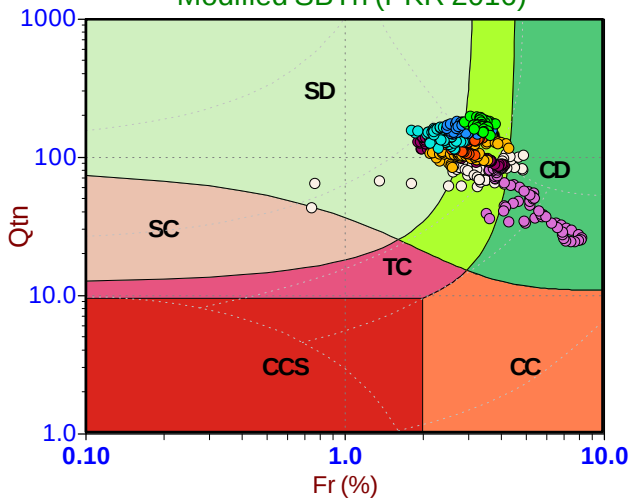

Standard SBT Chart (UBC 1986)

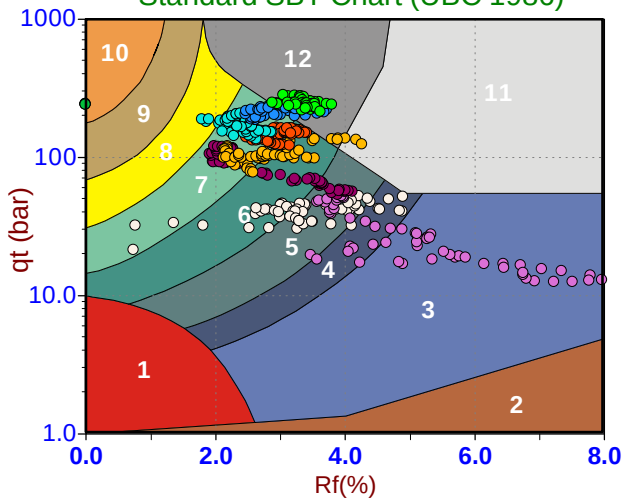

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-05 06:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT340
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

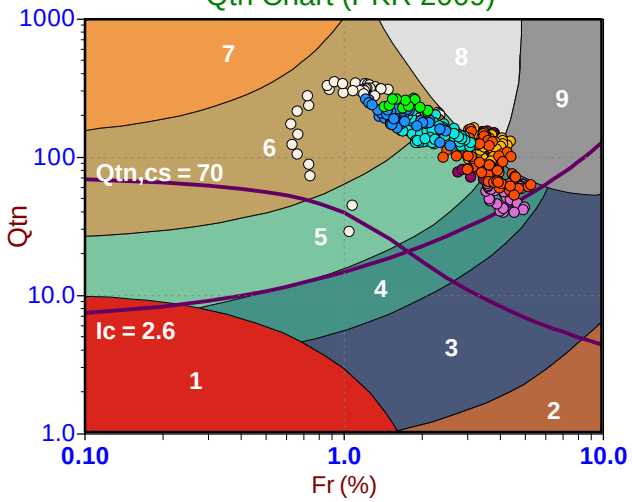

Modified SBTn (PKR 2016)

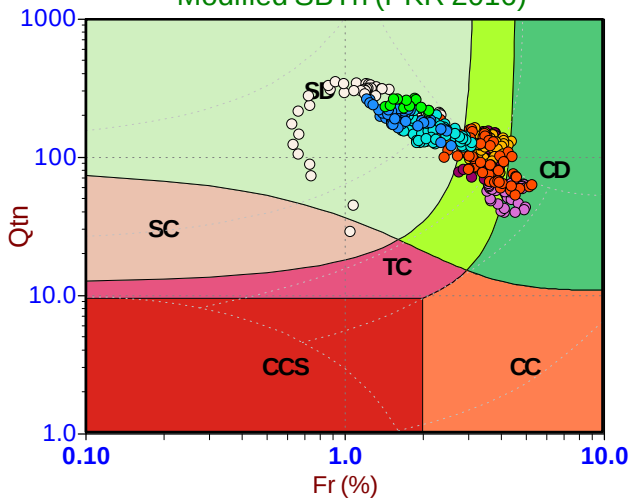

Standard SBT Chart (UBC 1986)

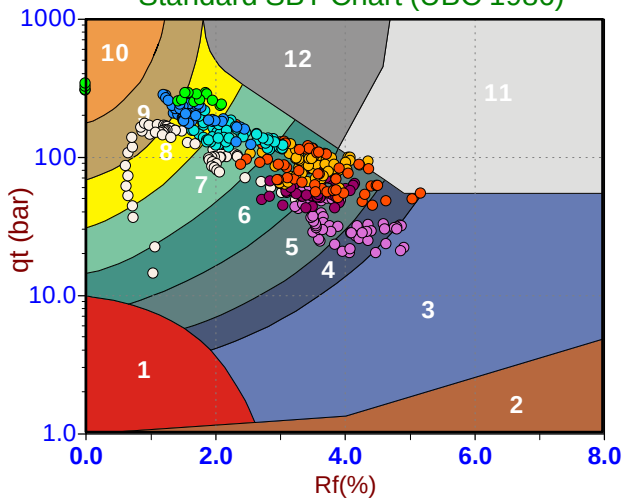

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-05 09:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT341
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

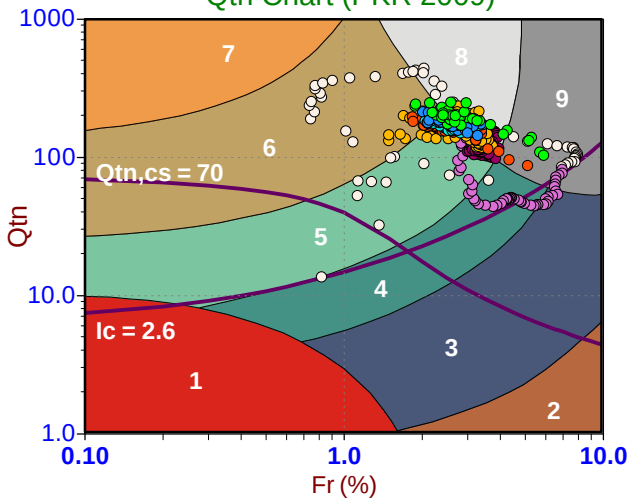

Modified SBTn (PKR 2016)

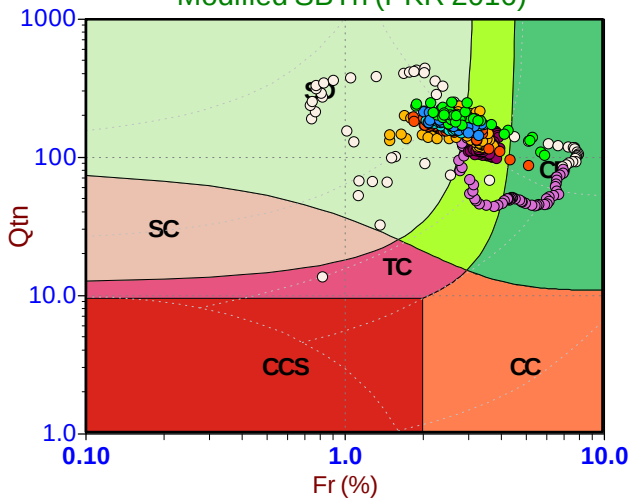

Standard SBT Chart (UBC 1986)

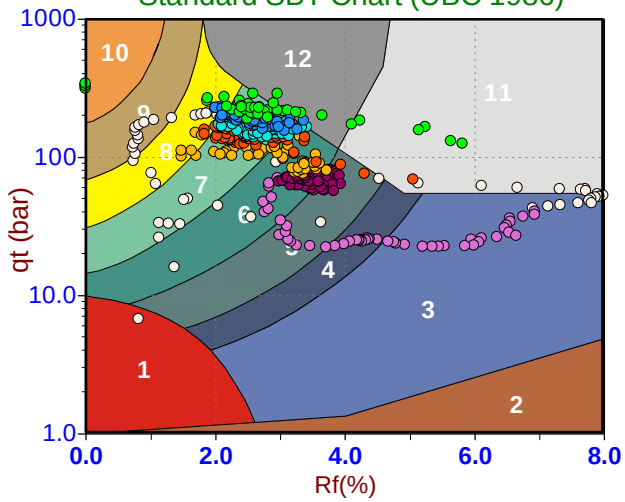

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-05 15:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT343
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

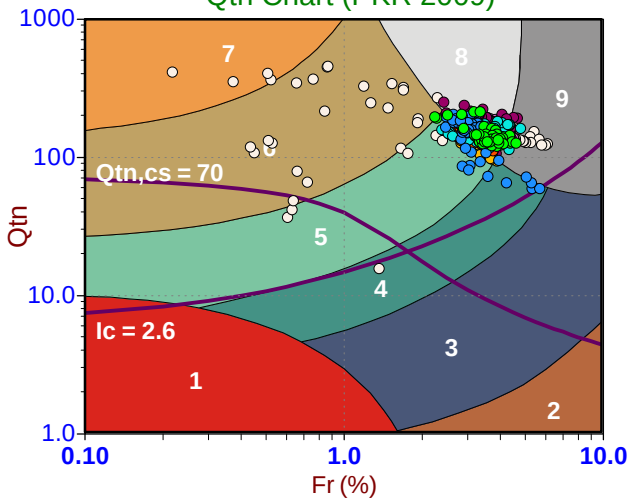

Modified SBTn (PKR 2016)

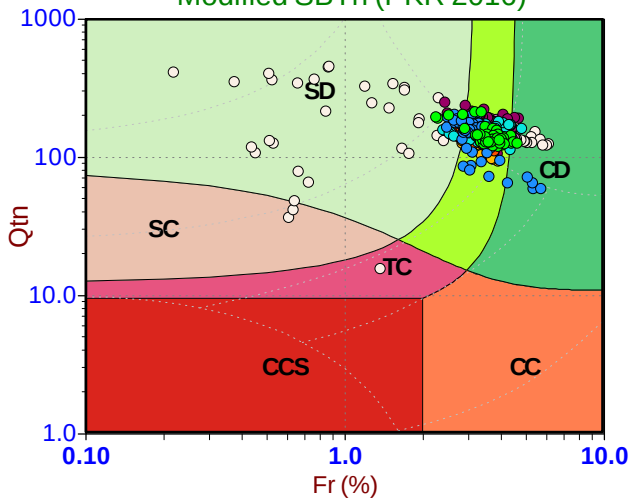

Standard SBT Chart (UBC 1986)

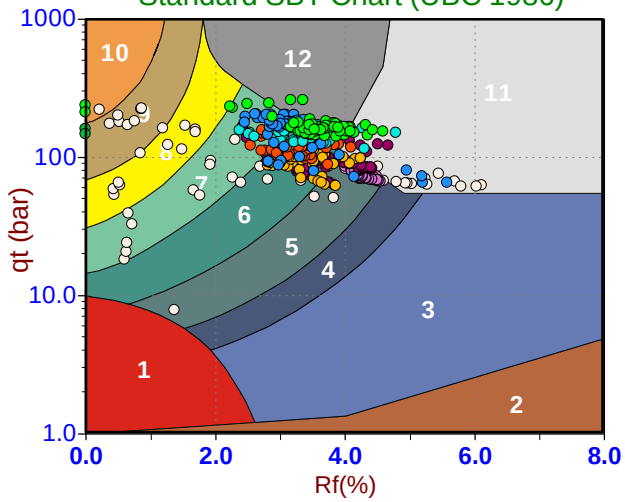

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-06 08:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT344
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

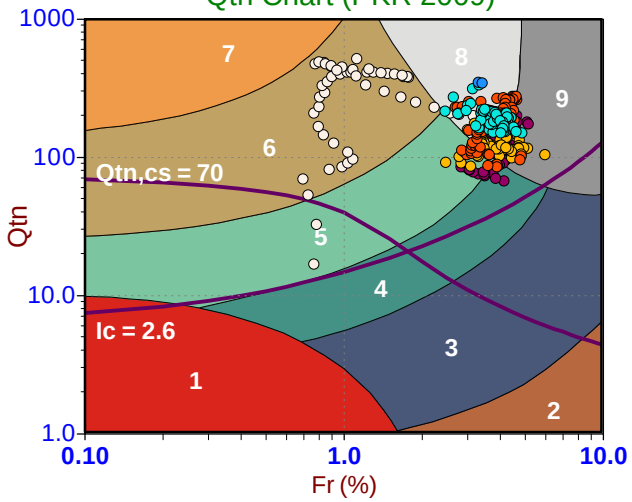

Modified SBTn (PKR 2016)

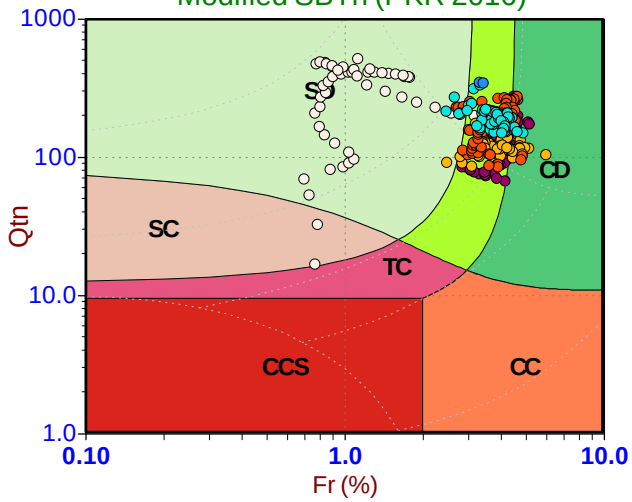

Standard SBT Chart (UBC 1986)

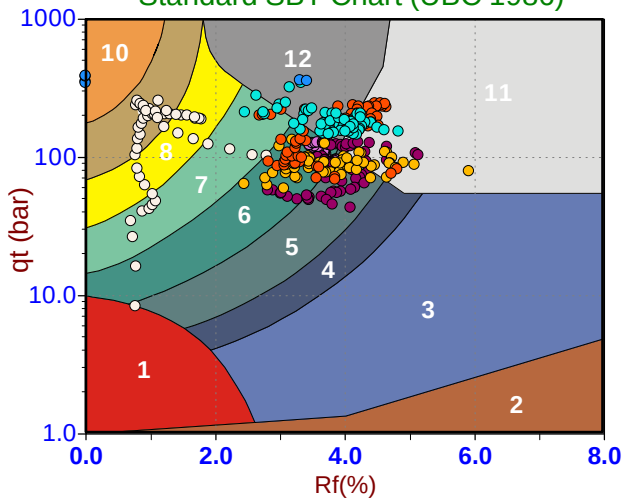

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-06 11:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT345
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

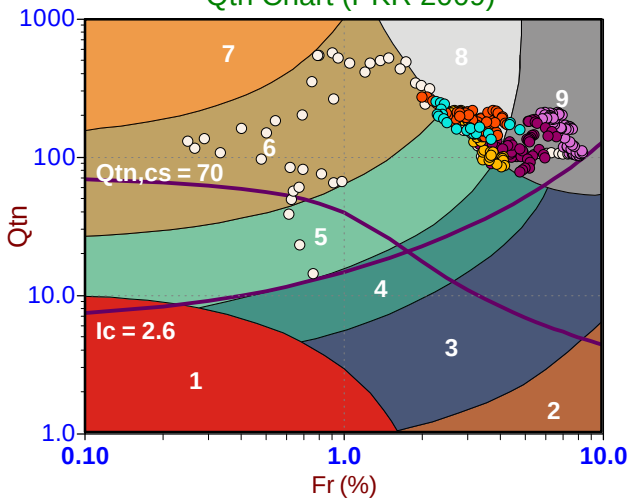

Modified SBTn (PKR 2016)

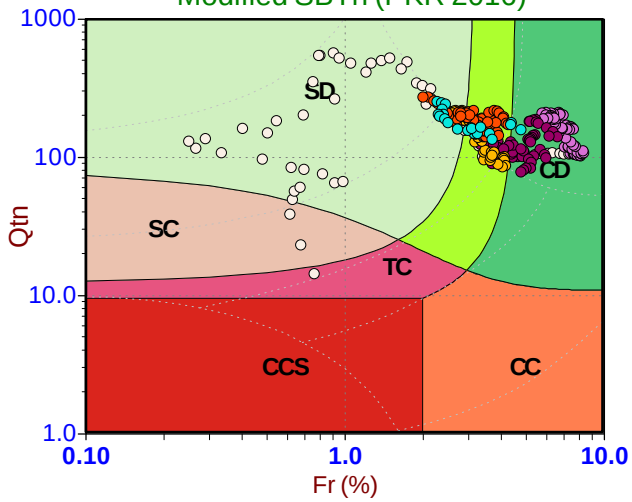

Standard SBT Chart (UBC 1986)

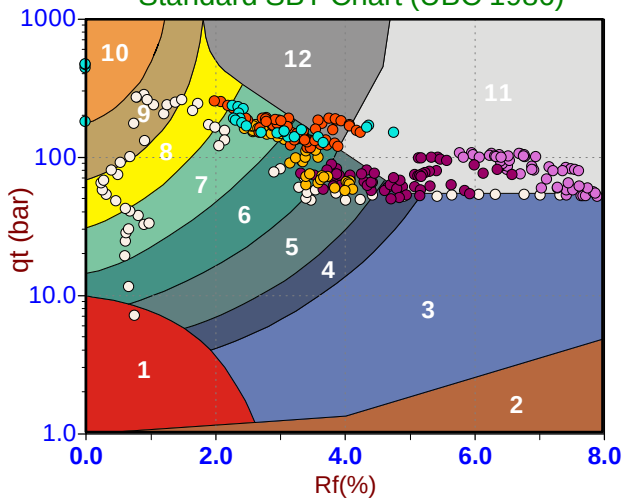

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-06 14:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT346
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

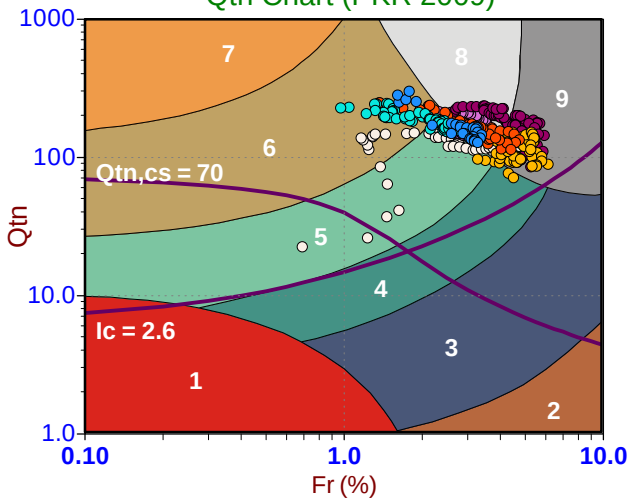

Modified SBTn (PKR 2016)

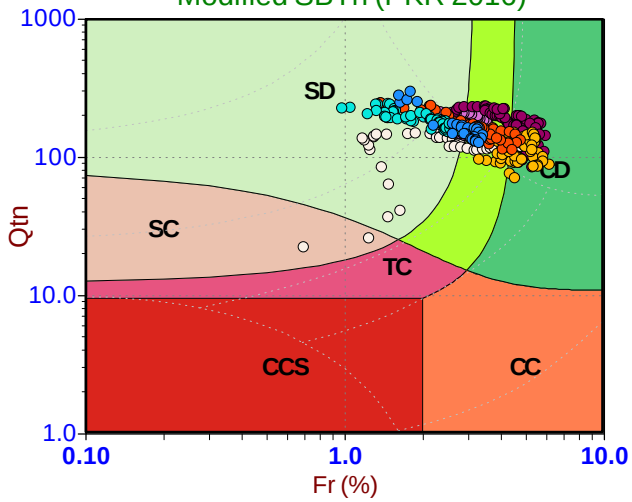

Standard SBT Chart (UBC 1986)

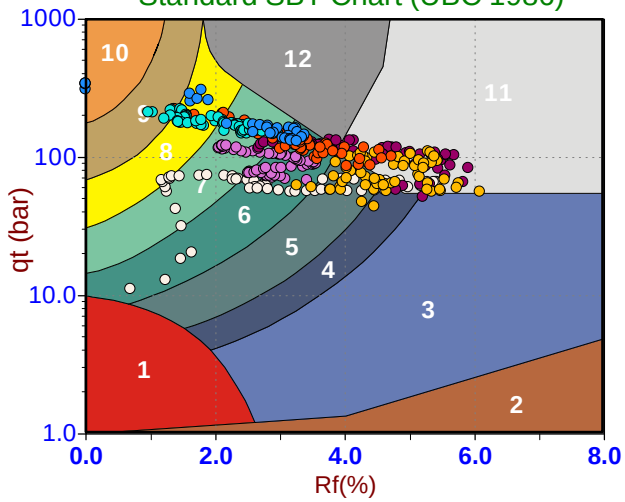

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-07 07:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT347
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

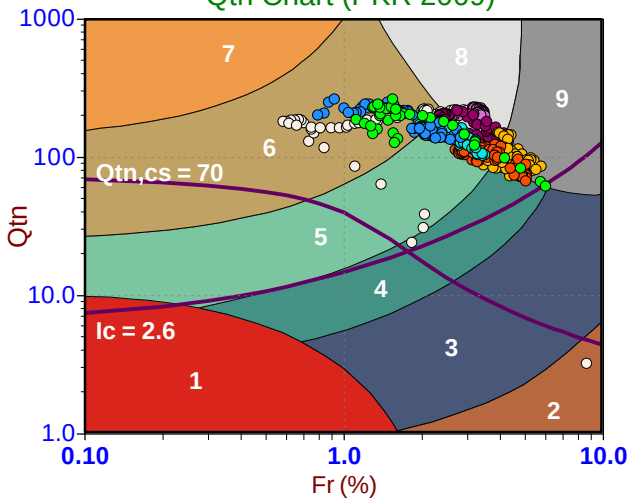

Modified SBTn (PKR 2016)

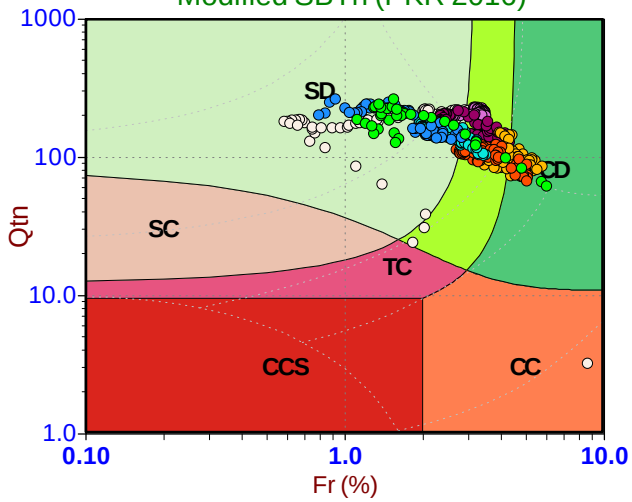

Standard SBT Chart (UBC 1986)

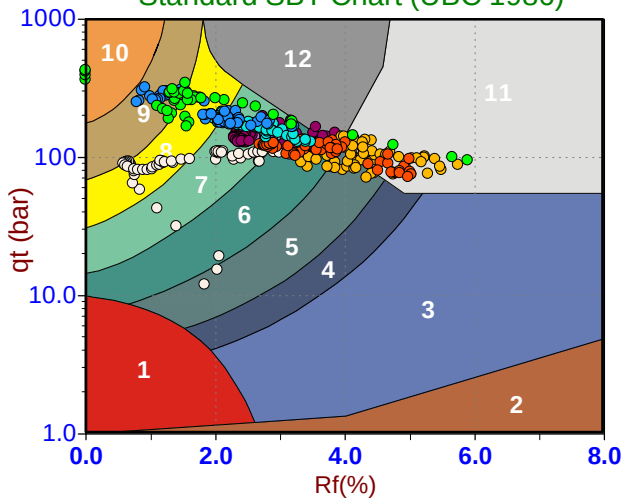

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-07 11:18
Site: Brooks, Alberta

Sounding: RCPT22-22CPT348
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

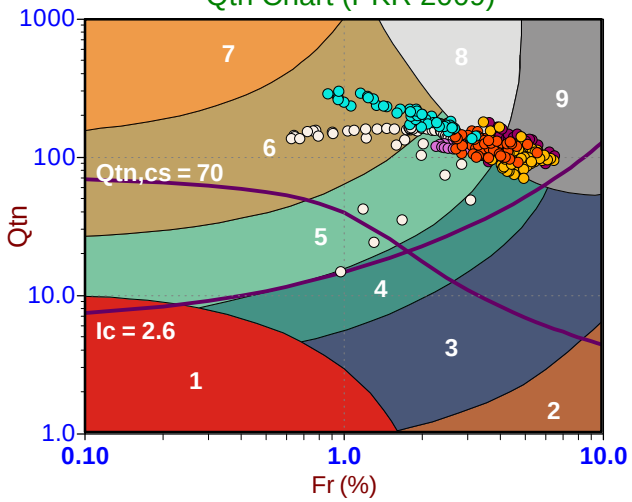

Modified SBTn (PKR 2016)

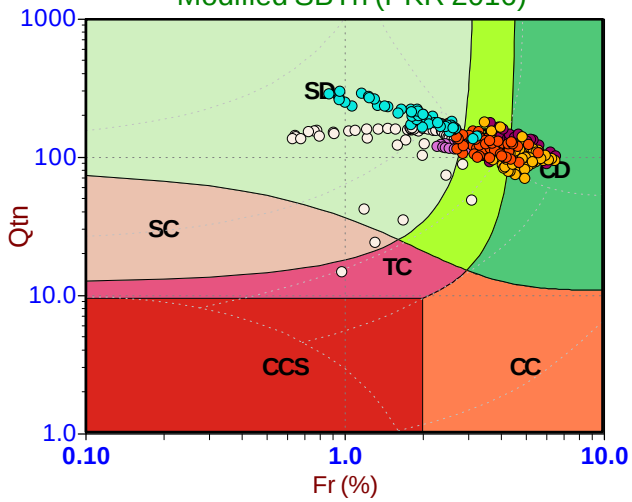

Standard SBT Chart (UBC 1986)

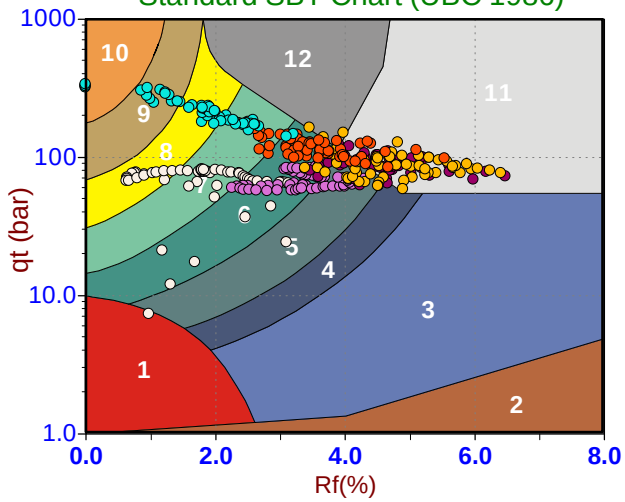

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-07 16:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT350
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

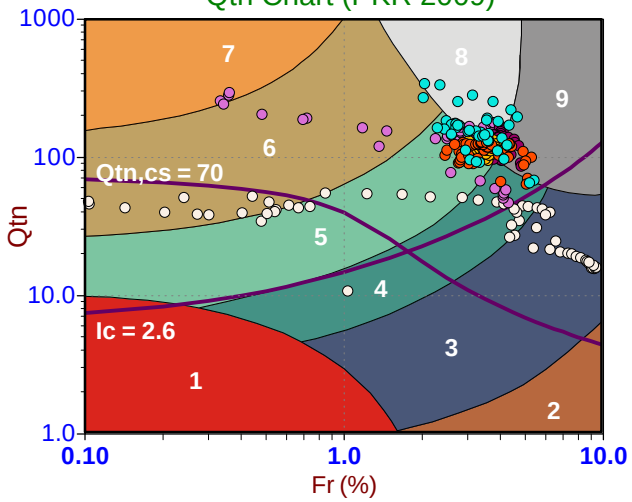

Modified SBTn (PKR 2016)

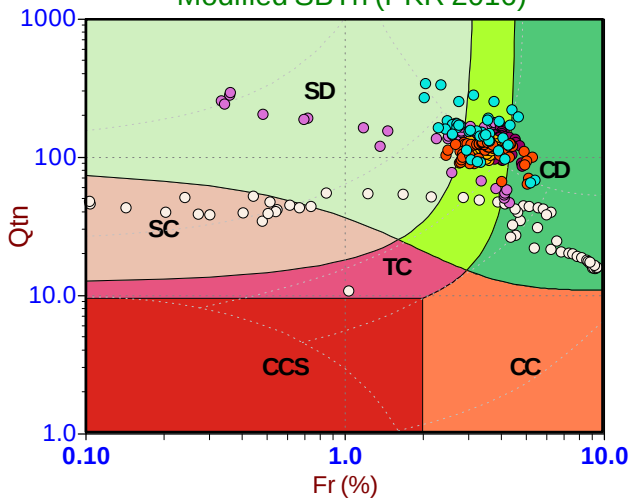

Standard SBT Chart (UBC 1986)

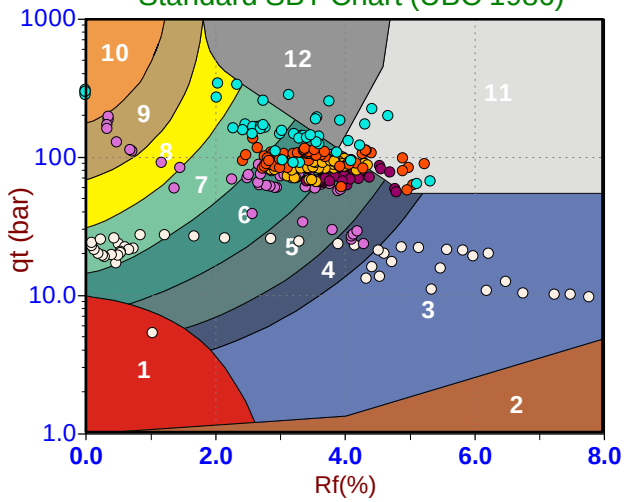

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 09:30
Site: Brooks, Alberta

Sounding: RCPT22-22CPT351
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

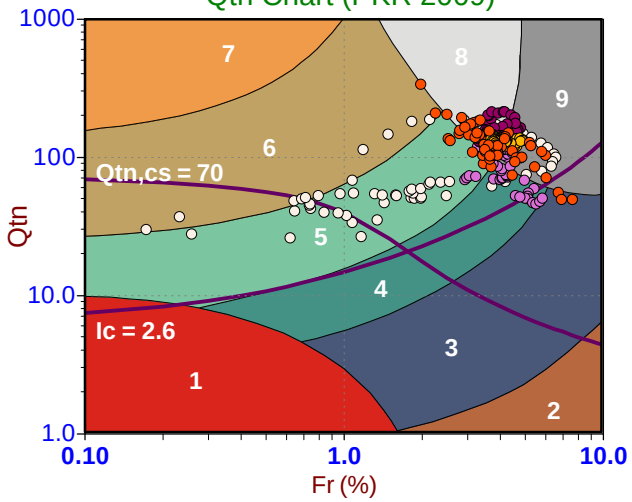

Modified SBTn (PKR 2016)

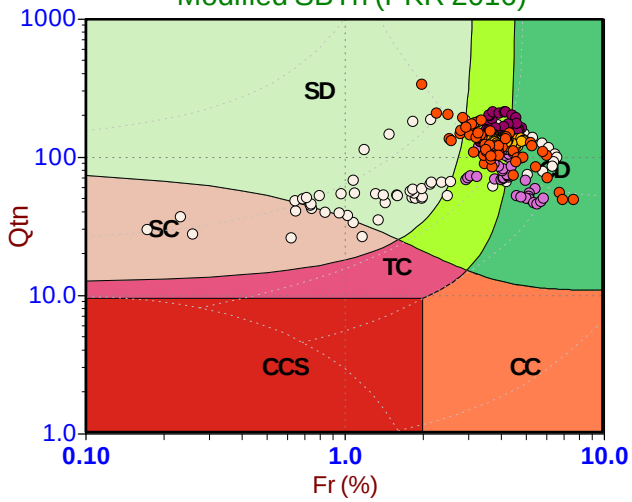

Standard SBT Chart (UBC 1986)

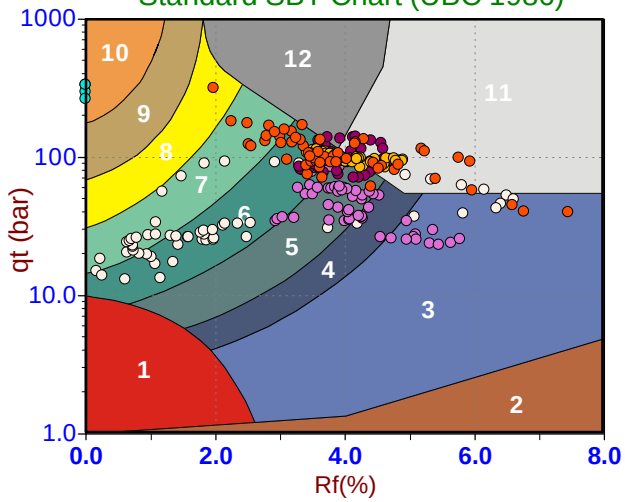

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 11:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT352
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

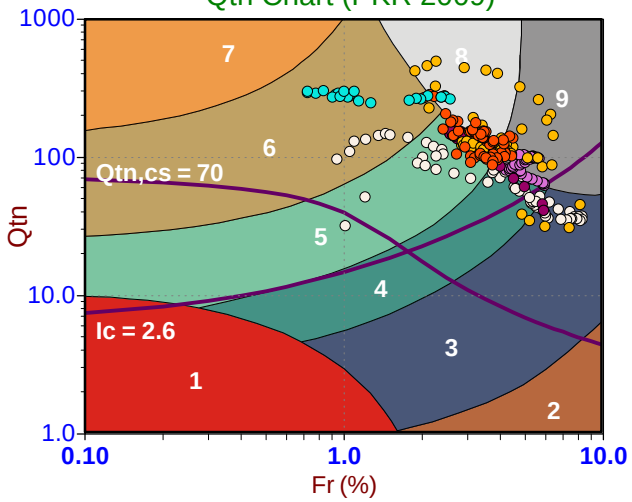

Modified SBTn (PKR 2016)

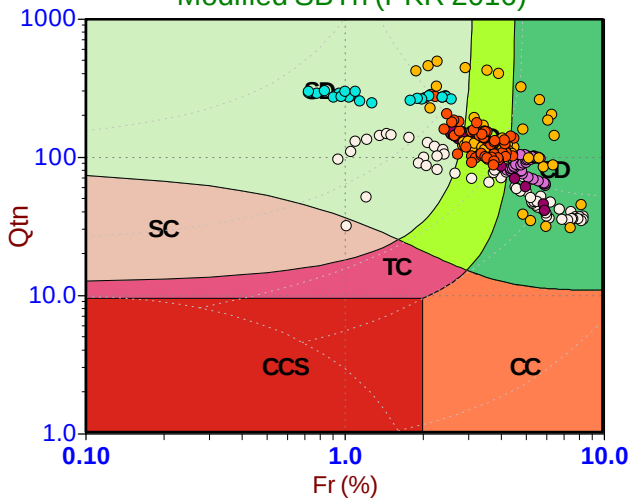

Standard SBT Chart (UBC 1986)

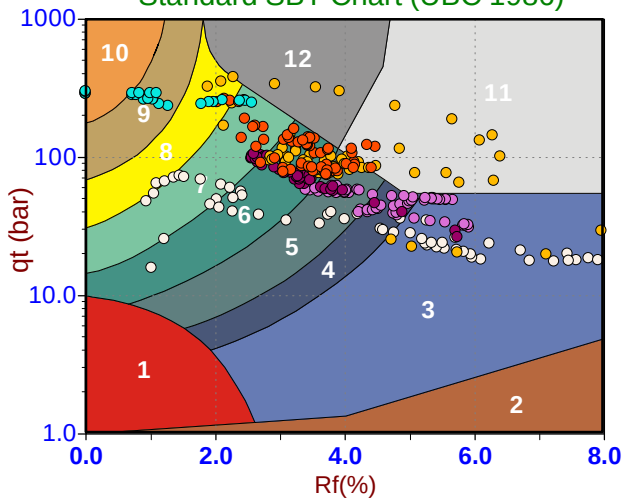

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 14:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

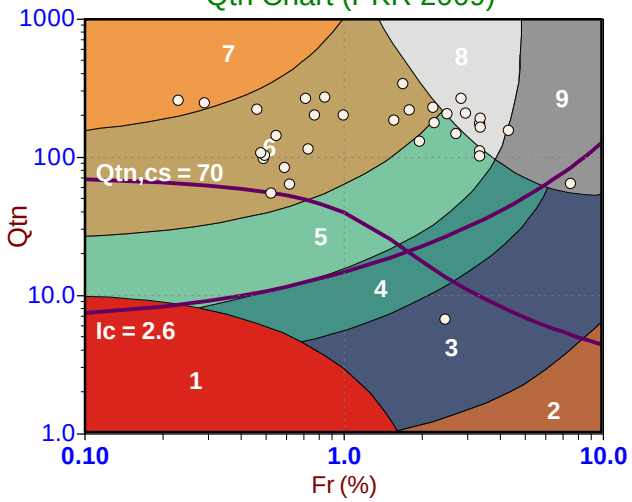

Modified SBTn (PKR 2016)

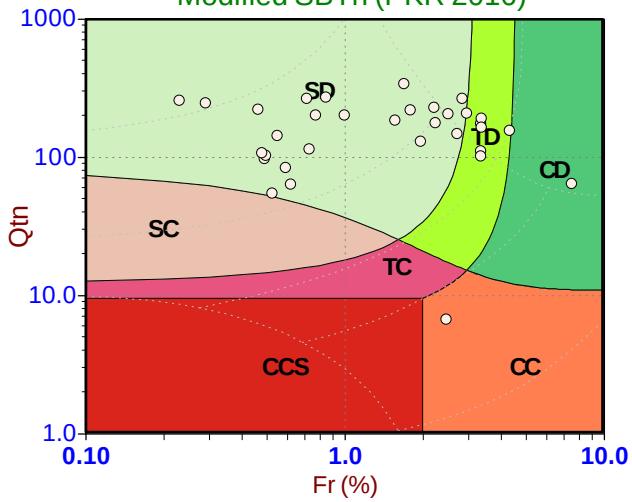

Standard SBT Chart (UBC 1986)

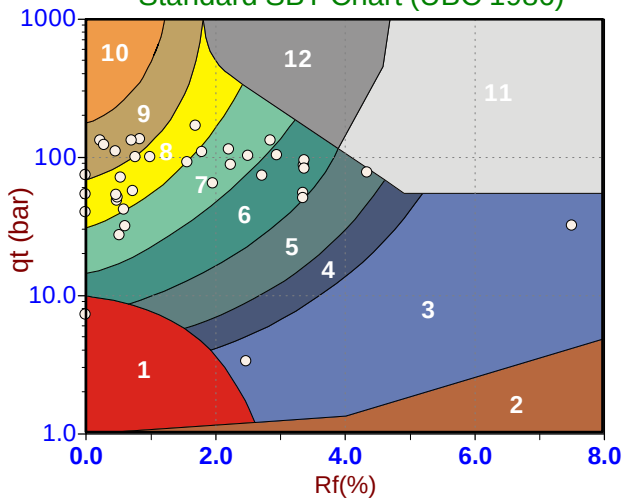

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 15:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353B
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

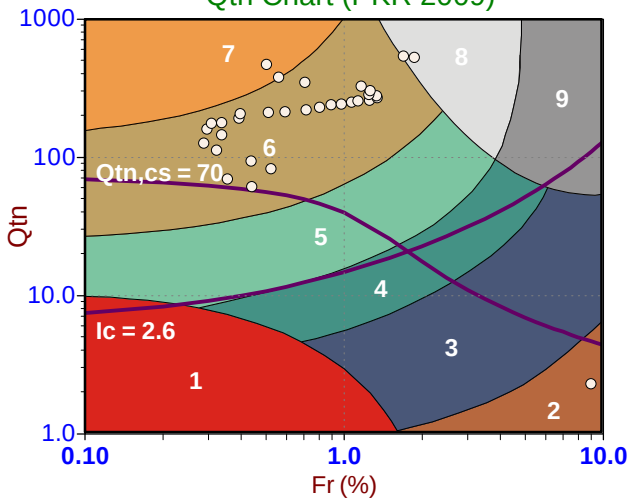

Modified SBTn (PKR 2016)

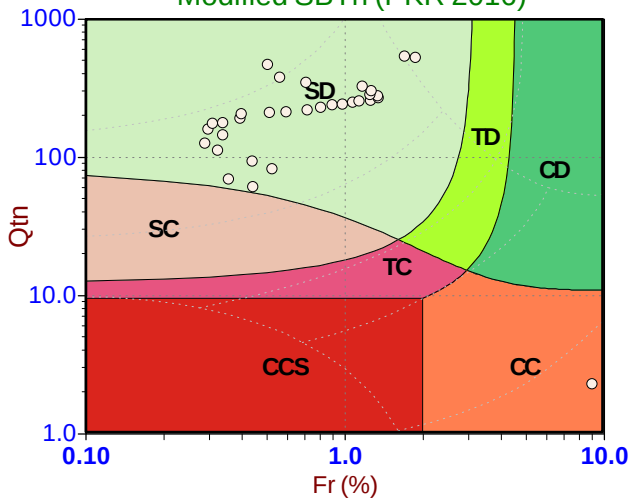

Standard SBT Chart (UBC 1986)

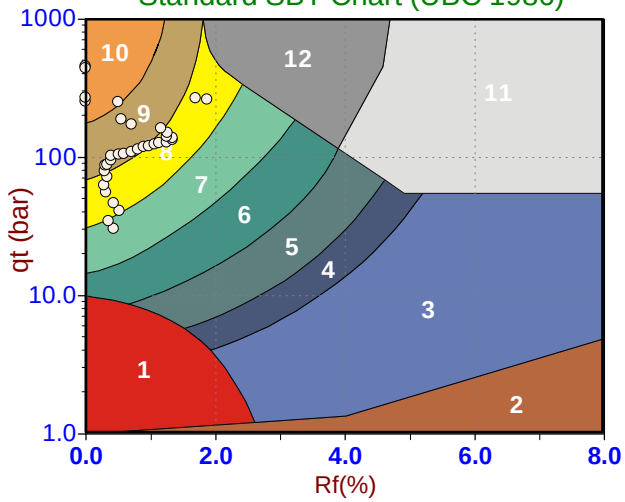

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-08 15:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353C
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

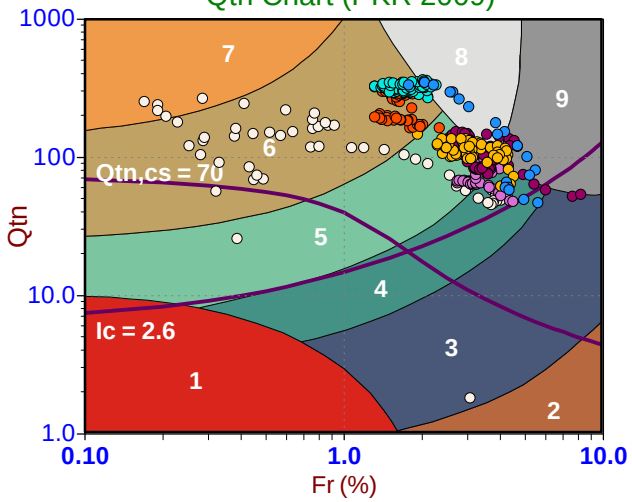

Modified SBTn (PKR 2016)

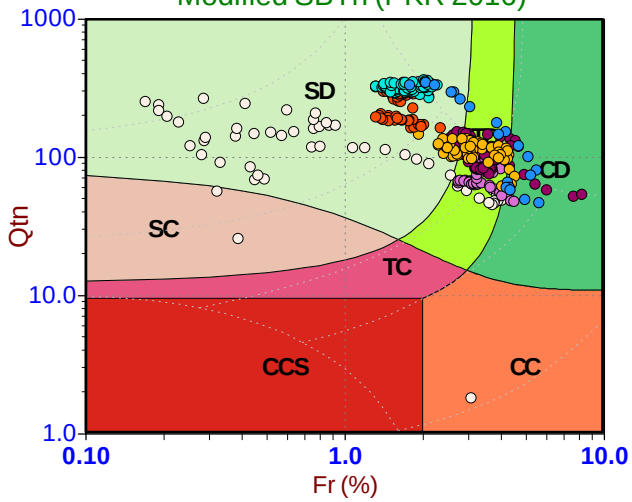

Standard SBT Chart (UBC 1986)

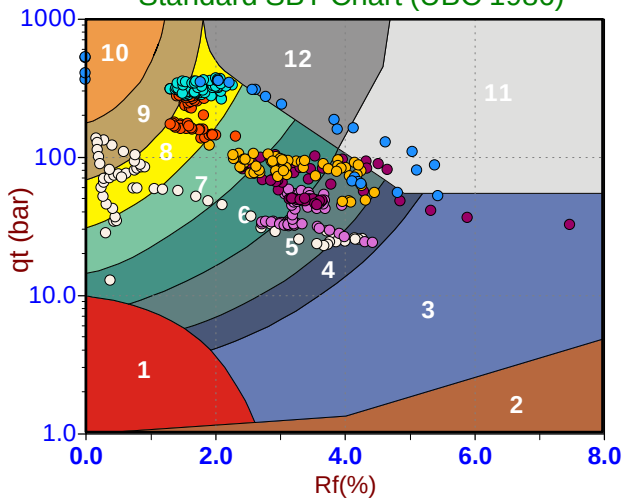

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-09 08:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT354
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

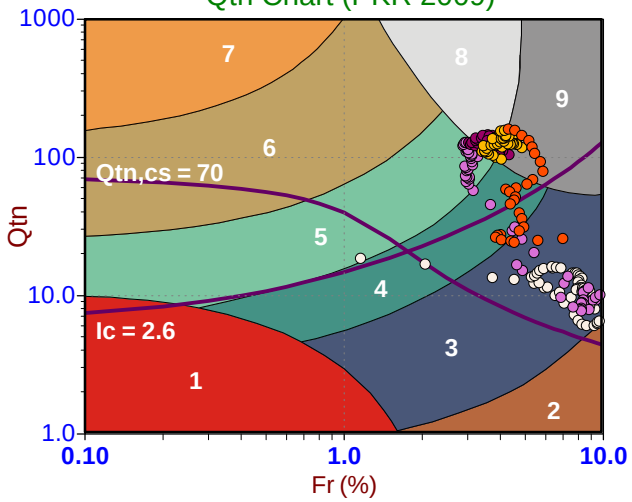

Modified SBTn (PKR 2016)

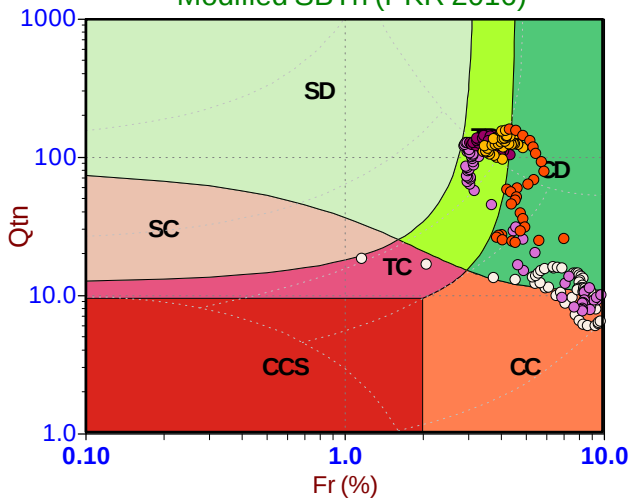

Standard SBT Chart (UBC 1986)

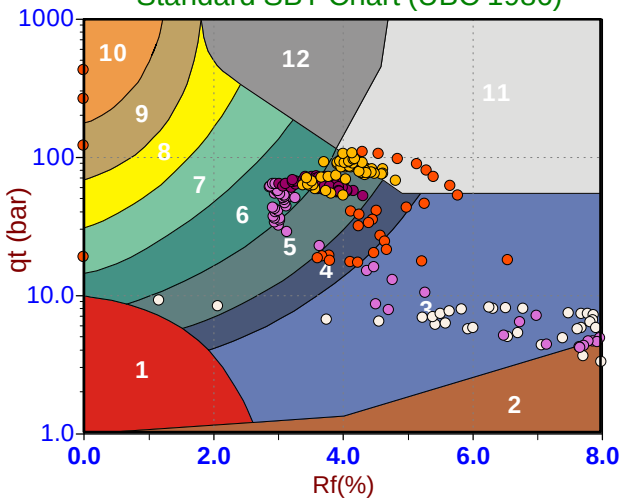

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-09 11:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT355
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

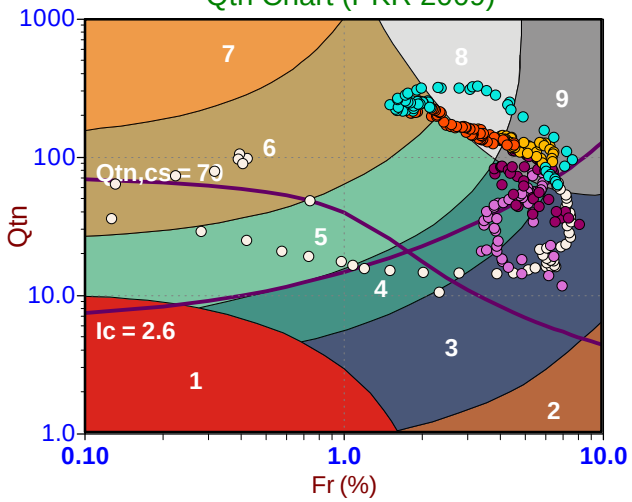

Modified SBTn (PKR 2016)

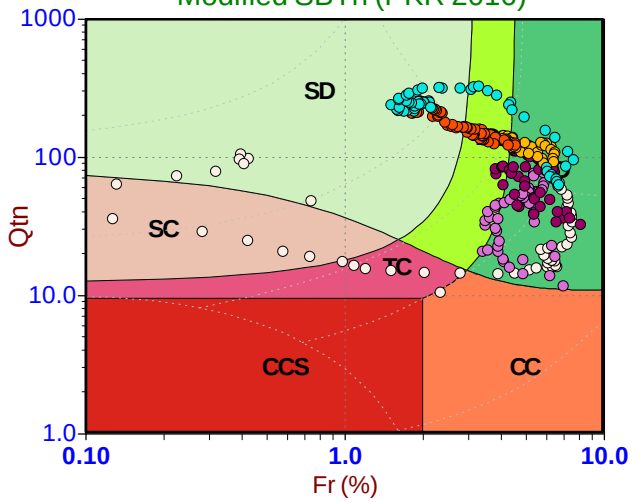

Standard SBT Chart (UBC 1986)

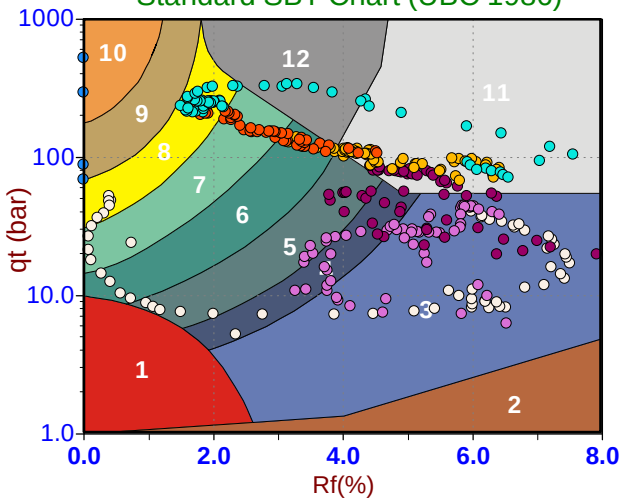

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-09 15:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT356
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

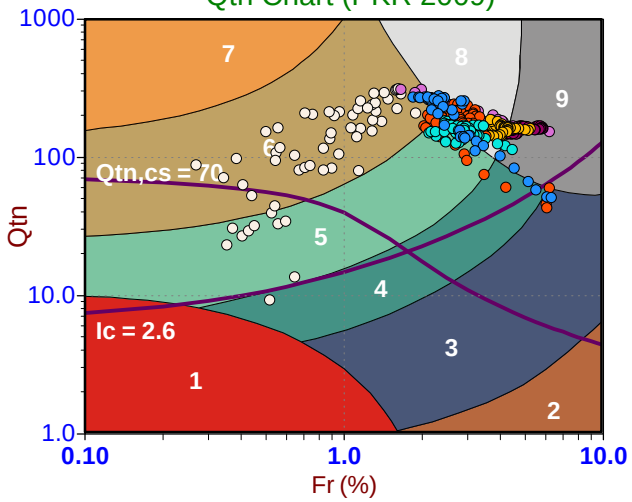

Modified SBTn (PKR 2016)

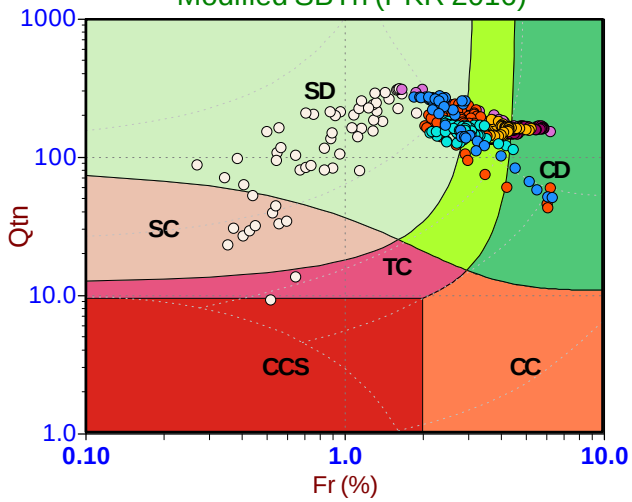

Standard SBT Chart (UBC 1986)

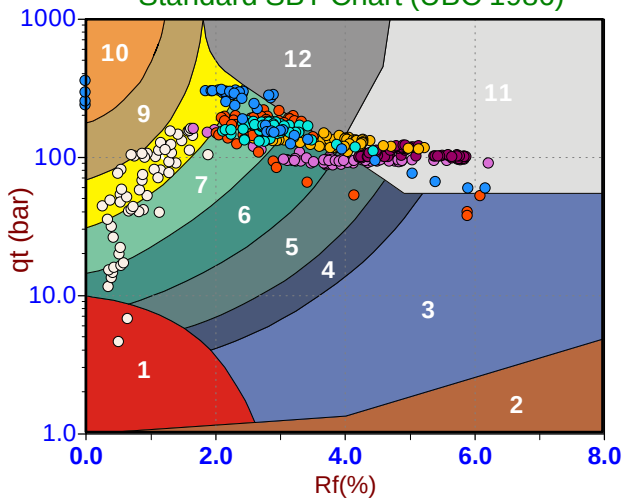

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-11 09:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT357
Cone: 854:T1500F15U35


Qtn Chart (PKR 2009)

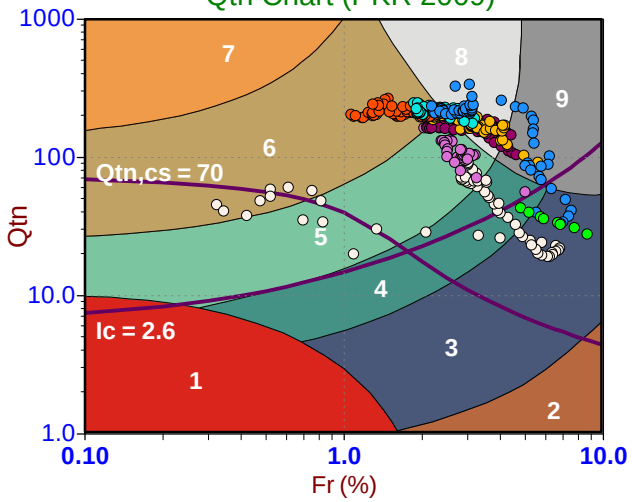

Modified SBTn (PKR 2016)

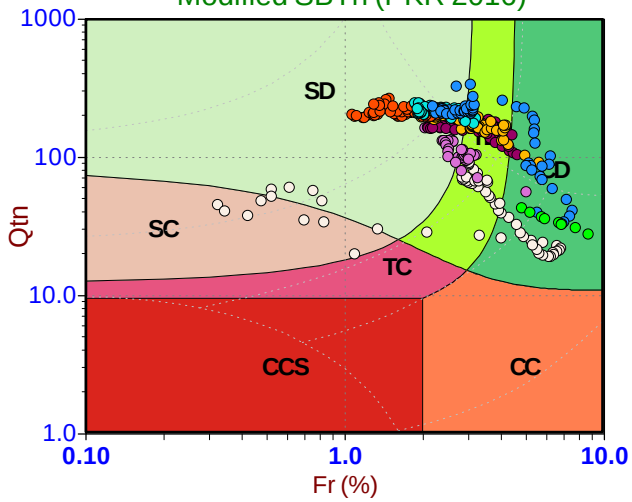

Standard SBT Chart (UBC 1986)

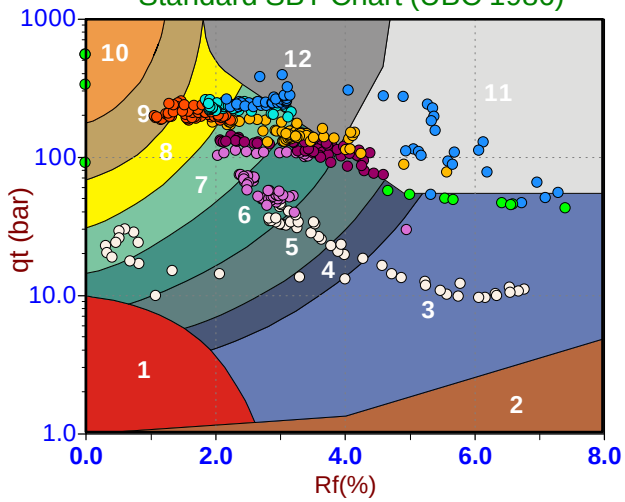

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-11 11:42
Site: Brooks, Alberta

Sounding: RCPT22-22CPT358
Cone: 750:T1500F15U35


Qtn Chart (PKR 2009)

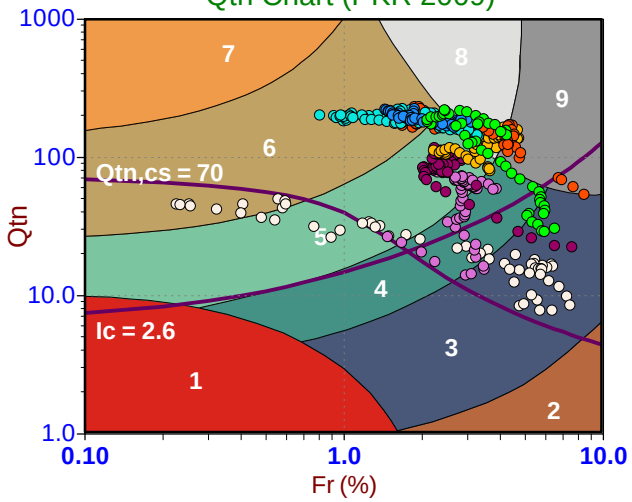

Modified SBTn (PKR 2016)

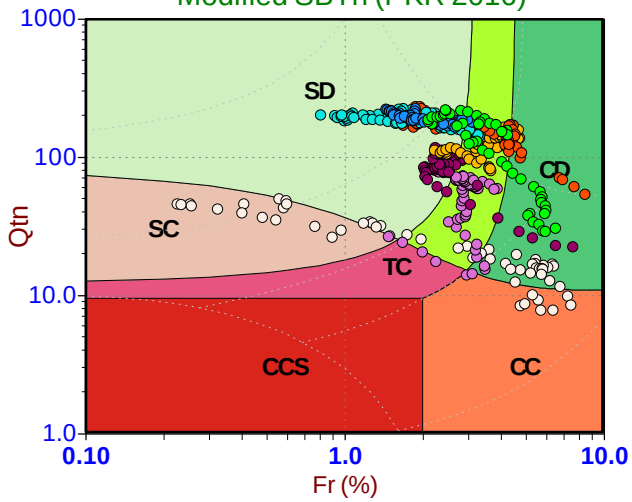

Standard SBT Chart (UBC 1986)

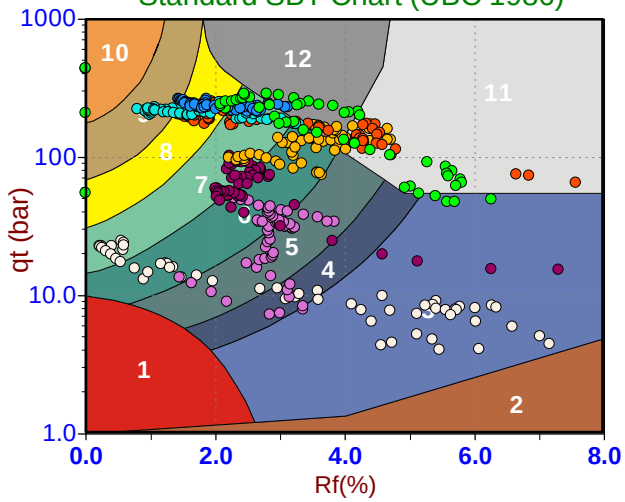

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-11 15:39
Site: Brooks, Alberta

Sounding: RCPT22-22CPT359
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

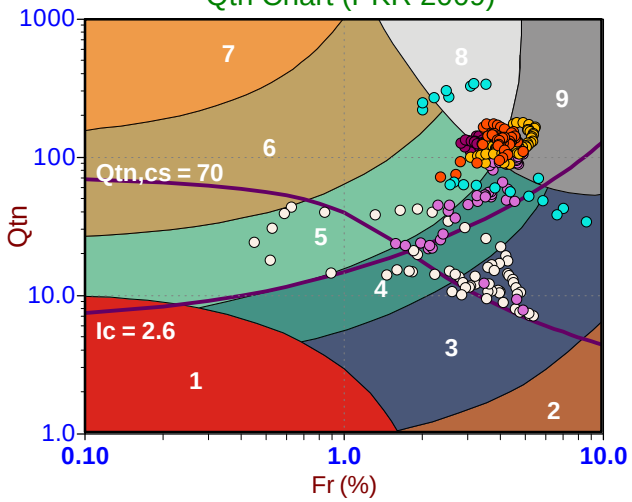

Modified SBTn (PKR 2016)

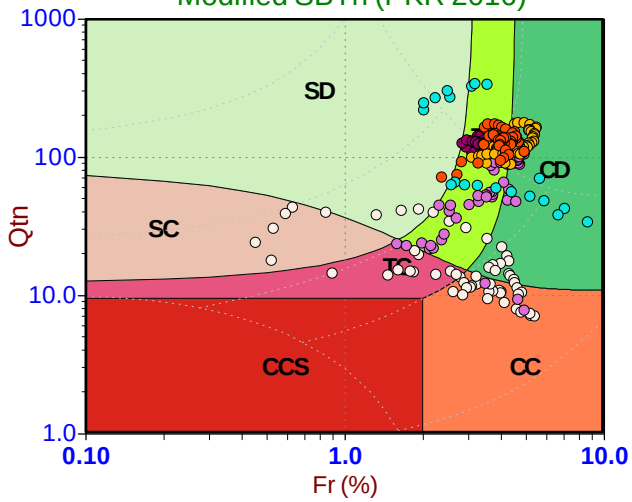

Standard SBT Chart (UBC 1986)

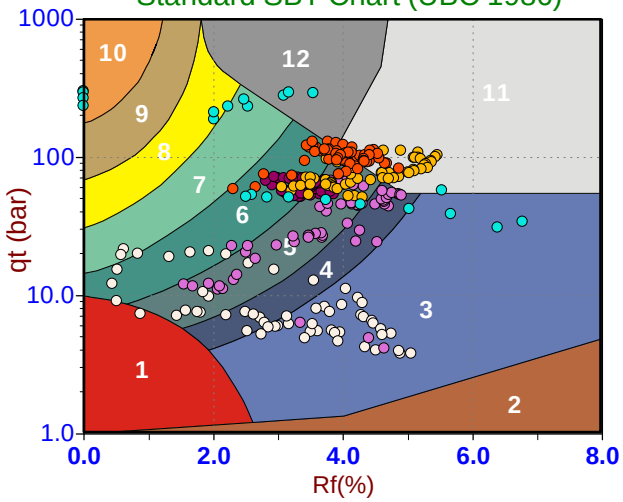

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand


CONETEC

MPE Engineering


Job No: 22-02-23796
Date: 2022-04-12 07:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT360
Cone: 821:T1000F10U35


Qtn Chart (PKR 2009)

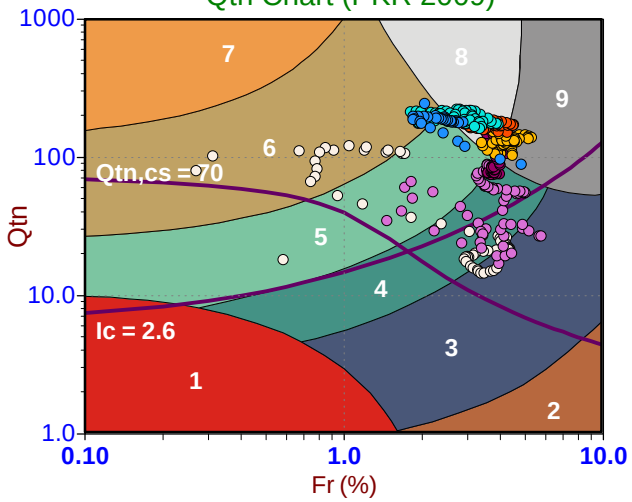

Modified SBTn (PKR 2016)

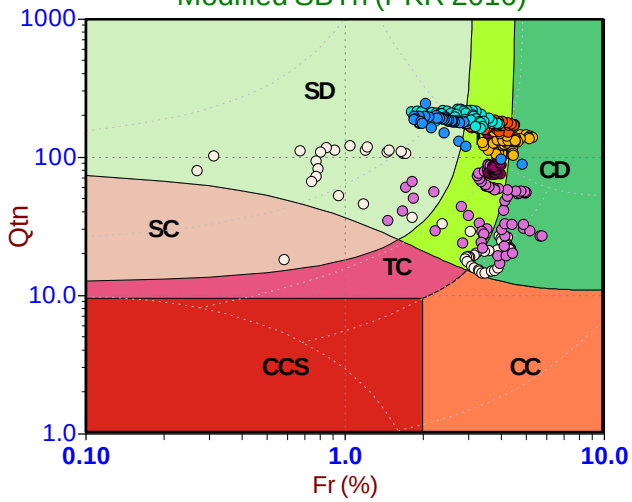

Standard SBT Chart (UBC 1986)

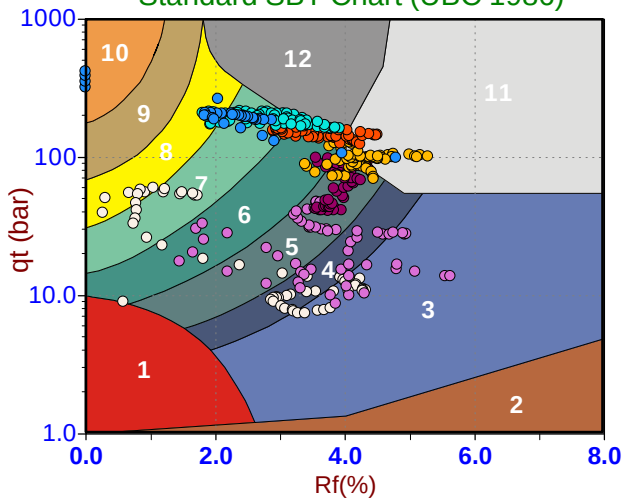

Depth Ranges

- >0.0 to 1.5 m
- >1.5 to 3.0 m
- >3.0 to 4.5 m
- >4.5 to 6.0 m
- >6.0 to 7.5 m
- >7.5 to 9.0 m
- >9.0 to 10.5 m
- >10.5 to 12.0 m
- >12.0 to 13.5 m
- >13.5 to 15.0 m
- >15.0 m

Legend

- Sensitive, Fine Grained
- Organic Soils
- Clays
- Silt Mixtures
- Sand Mixtures
- Sands
- Gravelly Sand to Sand
- Stiff Sand to Clayey Sand
- Very Stiff Fine Grained

Legend

- CCS (Cont. sensitive clay like)
- CC (Cont. clay like)
- TC (Cont. transitional)
- SC (Cont. sand like)
- CD (Dil. clay like)
- TD (Dil. transitional)
- SD (Dil. sand like)

Legend

- Sensitive Fines
- Organic Soil
- Clay
- Silty Clay
- Clayey Silt
- Silt
- Sandy Silt
- Silty Sand/Sand
- Sand
- Gravelly Sand
- Stiff Fine Grained
- Cemented Sand

Pore Pressure Dissipation Summary and Pore Pressure Dissipation Plots

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RSCPT22-22CPT100	22-02-23796_RS22-22CPT100	15.0	595.0	9.750						
RSCPT22-22CPT100	22-02-23796_RS22-22CPT100	15.0	1250.0	15.725						
RCPT22-22CPT101	22-02-23796_RP22-22CPT101	15.0	1130.0	8.900						
RCPT22-22CPT101	22-02-23796_RP22-22CPT101	15.0	1200.0	12.550						
RCPT22-22CPT102	22-02-23796_RP22-22CPT102	15.0	940.0	6.900						
RCPT22-22CPT102	22-02-23796_RP22-22CPT102	15.0	600.0	9.925						
RSCPT22-22CPT103	22-02-23796_RS22-22CPT103	15.0	900.0	4.850	2.63	2.22				
RCPT22-22CPT104	22-02-23796_RP22-22CPT104	15.0	700.0	5.900	1.00	4.90				
RCPT22-22CPT105	22-02-23796_RP22-22CPT105	15.0	550.0	5.825						
RCPT22-22CPT105	22-02-23796_RP22-22CPT105	15.0	1200.0	6.100						
RSCPT22-22CPT106	22-02-23796_RS22-22CPT106	15.0	600.0	3.800						
RSCPT22-22CPT106	22-02-23796_RS22-22CPT106	15.0	1200.0	7.000						
RCPT22-22CPT107	22-02-23796_RP22-22CPT107	15.0	400.0	4.925						
RCPT22-22CPT107A	22-02-23796_RP22-22CPT107A	15.0	500.0	4.900						
RCPT22-22CPT107A	22-02-23796_RP22-22CPT107A	15.0	700.0	8.225						
RCPT22-22CPT108	22-02-23796_RP22-22CPT108	15.0	595.0	5.850						
RCPT22-22CPT108	22-02-23796_RP22-22CPT108	15.0	300.0	10.050						
RSCPT22-22CPT109	22-02-23796_RS22-22CPT109	15.0	500.0	7.775						
RCPT22-22CPT110B	22-02-23796_RP22-22CPT110B	15.0	395.0	6.275						
RCPT22-22CPT111	22-02-23796_RP22-22CPT111	15.0	500.0	4.875						

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT111	22-02-23796_RP22-22CPT111	15.0	500.0	7.700	5.26	2.44				
RSCPT22-22CPT112	22-02-23796_RS22-22CPT112	15.0	210.0	1.775	0.11	1.67				
RSCPT22-22CPT112	22-02-23796_RS22-22CPT112	15.0	505.0	4.775	4.15	0.63				
RSCPT22-22CPT112	22-02-23796_RS22-22CPT112	15.0	400.0	6.500	2.63	3.87				
RCPT22-22CPT113	22-02-23796_RP22-22CPT113	15.0	510.0	7.775						
RCPT22-22CPT113	22-02-23796_RP22-22CPT113	15.0	405.0	10.775						
RCPT22-22CPT113	22-02-23796_RP22-22CPT113	15.0	1500.0	11.925						
RCPT22-22CPT114	22-02-23796_RP22-22CPT114	15.0	400.0	7.875						
RCPT22-22CPT114	22-02-23796_RP22-22CPT114	15.0	780.0	9.850						
RSCPT22-22CPT115	22-02-23796_RS22-22CPT115	15.0	1200.0	5.850						
RSCPT22-22CPT115	22-02-23796_RS22-22CPT115	15.0	1000.0	12.025						
RCPT22-22CPT117	22-02-23796_RP22-22CPT117	15.0	700.0	5.800						
RCPT22-22CPT118	22-02-23796_RP22-22CPT118	15.0	395.0	5.900						
RCPT22-22CPT118	22-02-23796_RP22-22CPT118	15.0	300.0	9.900						
RCPT22-22CPT119	22-02-23796_RP22-22CPT119	15.0	670.0	9.225						
RCPT22-22CPT119	22-02-23796_RP22-22CPT119	15.0	400.0	10.450						
RCPT22-22CPT120	22-02-23796_RP22-22CPT120	15.0	235.0	2.975						
RCPT22-22CPT120	22-02-23796_RP22-22CPT120	15.0	500.0	7.850						
RCPT22-22CPT120	22-02-23796_RP22-22CPT120	15.0	600.0	9.300	5.20	4.1				
RSCPT22-22CPT121	22-02-23796_RS22-22CPT121	15.0	300.0	6.900						

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT122	22-02-23796_RP22-22CPT122	15.0	1100.0	4.875						
RCPT22-22CPT123B	22-02-23796_RP22-22CPT123B	15.0	600.0	5.950						
RCPT22-22CPT124	22-02-23796_RP22-22CPT124	15.0	700.0	5.775						
RCPT22-22CPT125	22-02-23796_RP22-22CPT125	15.0	1290.0	5.825						
RCPT22-22CPT126	22-02-23796_RP22-22CPT126	15.0	300.0	6.875						
RCPT22-22CPT126	22-02-23796_RP22-22CPT126	15.0	700.0	9.750						
RSCPT22-22CPT127	22-02-23796_RS22-22CPT127	15.0	500.0	3.875	0.00	3.875				
RSCPT22-22CPT127	22-02-23796_RS22-22CPT127	15.0	395.0	6.875	0.00	6.875				
RCPT22-22CPT128	22-02-23796_RP22-22CPT128	15.0	1000.0	5.850	1.70	4.075				
RCPT22-22CPT129	22-02-23796_RP22-22CPT129	15.0	700.0	3.825						
RCPT22-22CPT130	22-02-23796_RP22-22CPT130	15.0	1200.0	6.825						
RCPT22-22CPT131	22-02-23796_RP22-22CPT131	15.0	400.0	5.775	2.78		3.00			
RSCPT22-22CPT131N	22-02-23796_RS22-22CPT131N	15.0	1200.0	8.850						
RCPT22-22CPT132	22-02-23796_RP22-22CPT132	15.0	700.0	7.825	5.13		2.70	94.7	100.0	7.41
RSCPT22-22CPT133	22-02-23796_RS22-22CPT133	15.0	400.0	4.825						
RSCPT22-22CPT133	22-02-23796_RS22-22CPT133	15.0	300.0	6.825						
RCPT22-22CPT134	22-02-23796_RP22-22CPT134	15.0	300.0	6.775						
RCPT22-22CPT134	22-02-23796_RP22-22CPT134	15.0	275.0	9.925						
RCPT22-22CPT135	22-02-23796_RP22-22CPT135	15.0	300.0	8.250						
RCPT22-22CPT136	22-02-23796_RP22-22CPT136	15.0	300.0	6.850						

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT136	22-02-23796_RP22-22CPT136	15.0	700.0	8.850						
RCPT22-22CPT137	22-02-23796_RP22-22CPT137	15.0	395.0	8.350						
RCPT22-22CPT137	22-02-23796_RP22-22CPT137	15.0	570.0	9.675						
RSCPT22-22CPT138	22-02-23796_RS22-22CPT138	15.0	300.0	7.975						
RCPT22-22CPT139	22-02-23796_RP22-22CPT139	15.0	300.0	5.900						
RCPT22-22CPT139	22-02-23796_RP22-22CPT139	15.0	290.0	9.000						
RCPT22-22CPT140	22-02-23796_RP22-22CPT140	15.0	700.0	5.850	2.32	3.53				
RCPT22-22CPT141	22-02-23796_RP22-22CPT141	15.0	400.0	7.500	5.90	1.61				
RCPT22-22CPT142	22-02-23796_RP22-22CPT142	15.0	700.0	4.775						
RCPT22-22CPT142	22-02-23796_RP22-22CPT142	15.0	265.0	7.825						
RCPT22-22CPT143	22-02-23796_RP22-22CPT143	15.0	700.0	5.875						
RSCPT22-22CPT144	22-02-23796_RS22-22CPT144	15.0	295.0	5.875						
RSCPT22-22CPT144	22-02-23796_RS22-22CPT144	15.0	1200.0	7.875						
RCPT22-22CPT145	22-02-23796_RP22-22CPT145	15.0	850.0	4.875						
RCPT22-22CPT146	22-02-23796_RP22-22CPT146	15.0	1600.0	7.675						
RCPT22-22CPT147	22-02-23796_RP22-22CPT147	15.0	500.0	6.275						
RCPT22-22CPT147	22-02-23796_RP22-22CPT147	15.0	560.0	9.525						
RCPT22-22CPT148	22-02-23796_RP22-22CPT148	15.0	1000.0	3.950	1.11	2.85				
RCPT22-22CPT148	22-02-23796_RP22-22CPT148	15.0	700.0	9.175						
RCPT22-22CPT149	22-02-23796_RP22-22CPT149	15.0	300.0	3.875						

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT149	22-02-23796_RP22-22CPT149	15.0	1200.0	6.000						
RCPT22-22CPT150	22-02-23796_RP22-22CPT150	15.0	400.0	5.850	3.85		2.00	39.5	100.0	17.77
RCPT22-22CPT150	22-02-23796_RP22-22CPT150	15.0	1000.0	8.700						
RCPT22-22CPT151	22-02-23796_RP22-22CPT151	15.0	600.0	5.800	3.20	2.60				
RCPT22-22CPT151	22-02-23796_RP22-22CPT151	15.0	200.0	6.300	1.91	4.39				
RCPT22-22CPT152	22-02-23796_RP22-22CPT152	15.0	500.0	5.775						
RCPT22-22CPT153A	22-02-23796_RP22-22CPT153A	15.0	300.0	6.725						
RCPT22-22CPT154	22-02-23796_RP22-22CPT154	15.0	495.0	6.800						
RCPT22-22CPT154	22-02-23796_RP22-22CPT154	15.0	400.0	9.225						
RCPT22-22CPT155	22-02-23796_RP22-22CPT155	15.0	500.0	5.775	2.48		3.30			
RCPT22-22CPT155	22-02-23796_RP22-22CPT155	15.0	540.0	8.900						
RCPT22-22CPT156	22-02-23796_RP22-22CPT156	15.0	400.0	4.900						
RCPT22-22CPT156	22-02-23796_RP22-22CPT156	15.0	595.0	10.200						
RCPT22-22CPT157	22-02-23796_RP22-22CPT157	15.0	500.0	4.900	3.00		1.90			
RCPT22-22CPT157	22-02-23796_RP22-22CPT157	15.0	375.0	5.175						
RCPT22-22CPT158	22-02-23796_RP22-22CPT158	15.0	300.0	4.725						
RCPT22-22CPT160	22-02-23796_RP22-22CPT160	15.0	1200.0	6.750						
RCPT22-22CPT161B	22-02-23796_RP22-22CPT161B	15.0	390.0	9.375	7.38		2.00			
RCPT22-22CPT162	22-02-23796_RP22-22CPT162	15.0	300.0	6.875						
RCPT22-22CPT162	22-02-23796_RP22-22CPT162	15.0	400.0	10.350						

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT163	22-02-23796_RP22-22CPT163	15.0	1300.0	5.750						
RCPT22-22CPT164	22-02-23796_RP22-22CPT164	15.0	300.0	6.875						
RCPT22-22CPT165	22-02-23796_RP22-22CPT165	15.0	1200.0	3.800						
RCPT22-22CPT166	22-02-23796_RP22-22CPT166	15.0	700.0	5.775	1.20		4.58			
RCPT22-22CPT166	22-02-23796_RP22-22CPT166	15.0	1200.0	10.250						
RCPT22-22CPT167	22-02-23796_RP22-22CPT167	15.0	295.0	7.825						
RCPT22-22CPT167	22-02-23796_RP22-22CPT167	15.0	950.0	9.575						
RCPT22-22CPT168	22-02-23796_RP22-22CPT168	15.0	500.0	5.875	3.48		2.40			
RCPT22-22CPT168	22-02-23796_RP22-22CPT168	15.0	505.0	8.375						
RCPT22-22CPT168	22-02-23796_RP22-22CPT168	15.0	310.0	9.225						
RCPT22-22CPT169	22-02-23796_RP22-22CPT169	15.0	690.0	6.175						
RCPT22-22CPT169	22-02-23796_RP22-22CPT169	15.0	890.0	7.850						
RCPT22-22CPT170	22-02-23796_RP22-22CPT170	15.0	1200.0	8.450	7.35		1.10	196.7	100.0	3.57
RCPT22-22CPT170	22-02-23796_RP22-22CPT170	15.0	1100.0	9.100	8.00		1.10	839.6	100.0	0.84
RCPT22-22CPT200	22-02-23796_RP22-22CPT200	15.0	595.0	5.875						
RCPT22-22CPT200	22-02-23796_RP22-22CPT200	15.0	1200.0	7.125						
RCPT22-22CPT201	22-02-23796_RP22-22CPT201	15.0	500.0	4.875	1.88		3.00			
RCPT22-22CPT202	22-02-23796_RP22-22CPT202	15.0	500.0	4.775						
RCPT22-22CPT202	22-02-23796_RP22-22CPT202	15.0	1000.0	8.325	6.33		2.00			
RCPT22-22CPT203	22-02-23796_RP22-22CPT203	15.0	1200.0	3.925	1.93		2.00	90.9	100.0	7.72

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RSCPT22-22CPT204	22-02-23796_RS22-22CPT204	15.0	210.0	5.600						
RCPT22-22CPT205	22-02-23796_RP22-22CPT205	15.0	700.0	4.850	3.35		1.50			
RCPT22-22CPT205	22-02-23796_RP22-22CPT205	15.0	1200.0	7.850						
RCPT22-22CPT206	22-02-23796_RP22-22CPT206	15.0	1200.0	3.725	1.83		1.90			
RCPT22-22CPT207	22-02-23796_RP22-22CPT207	15.0	140.0	5.900						
RCPT22-22CPT208	22-02-23796_RP22-22CPT208	15.0	900.0	5.050						
RSCPT22-22CPT209	22-02-23796_RS22-22CPT209	15.0	1190.0	4.925						
RCPT22-22CPT210	22-02-23796_RP22-22CPT210	15.0	800.0	3.850	1.16	2.69				
RCPT22-22CPT211	22-02-23796_RP22-22CPT211	15.0	300.0	3.750						
RCPT22-22CPT211	22-02-23796_RP22-22CPT211	15.0	600.0	4.725						
RCPT22-22CPT212	22-02-23796_RP22-22CPT212	15.0	900.0	3.900	1.30		2.60			
RCPT22-22CPT212	22-02-23796_RP22-22CPT212	15.0	1200.0	7.675						
RCPT22-22CPT213	22-02-23796_RP22-22CPT213	15.0	600.0	3.850						
RCPT22-22CPT213	22-02-23796_RP22-22CPT213	15.0	1200.0	7.975	5.28		2.70	166.0	100.0	4.23
RCPT22-22CPT213	22-02-23796_RP22-22CPT213	15.0	1080.0	12.025	9.33		2.70			
RCPT22-22CPT214	22-02-23796_RP22-22CPT214	15.0	1200.0	6.875	2.88		4.00			
RCPT22-22CPT217	22-02-23796_RP22-22CPT217	15.0	1190.0	4.850						
RCPT22-22CPT217	22-02-23796_RP22-22CPT217	15.0	1200.0	8.850						
RCPT22-22CPT218	22-02-23796_RP22-22CPT218	15.0	1190.0	7.025	3.23		3.80			
RCPT22-22CPT218	22-02-23796_RP22-22CPT218	15.0	1210.0	9.575	5.78		3.80			

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT219	22-02-23796_RP22-22CPT219	15.0	1200.0	6.025						
RCPT22-22CPT219	22-02-23796_RP22-22CPT219	15.0	1200.0	11.475	8.88		2.60	426.6	100.0	1.65
RCPT22-22CPT220B	22-02-23796_RP22-22CPT220B	15.0	1190.0	6.900						
RSCPT22-22CPT221	22-02-23796_RS22-22CPT221	15.0	800.0	3.750						
RSCPT22-22CPT221	22-02-23796_RS22-22CPT221	15.0	1200.0	7.725						
RPCPT22-22CPT222	22-02-23796_RP22-22CPT222	15.0	1000.0	8.550						
RPCPT22-22CPT223	22-02-23796_RP22-22CPT223	15.0	800.0	3.875						
RPCPT22-22CPT223	22-02-23796_RP22-22CPT223	15.0	1200.0	9.875						
RPCPT22-22CPT223	22-02-23796_RP22-22CPT223	15.0	400.0	11.025						
RPCPT22-22CPT224	22-02-23796_RP22-22CPT224	15.0	1090.0	3.875	3.18		0.70			
RPCPT22-22CPT224	22-02-23796_RP22-22CPT224	15.0	1190.0	9.175	8.48		0.70			
RPCPT22-22CPT224	22-02-23796_RP22-22CPT224	15.0	300.0	11.275	10.58		0.70	177.0	100.0	3.96
RCPT22-22CPT225	22-02-23796_RP22-22CPT225	15.0	1300.0	6.175						
RCPT22-22CPT225	22-02-23796_RP22-22CPT225	15.0	1200.0	9.225						
RPCPT22-22CPT226	22-02-23796_RP22-22CPT226	15.0	1200.0	3.925						
RPCPT22-22CPT226	22-02-23796_RP22-22CPT226	15.0	1200.0	9.050						
RSCPT22-22CPT227	22-02-23796_RS22-22CPT227	15.0	1200.0	4.725						
RCPT22-22CPT230	22-02-23796_RP22-22CPT230	15.0	800.0	5.825						
RCPT22-22CPT230	22-02-23796_RP22-22CPT230	15.0	1200.0	9.100						
RCPT22-22CPT231A	22-02-23796_RP22-22CPT231A	15.0	700.0	4.975	2.48		2.50			

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT231A	22-02-23796_RP22-22CPT231A	15.0	1200.0	7.100						
RCPT22-22CPT232	22-02-23796_RP22-22CPT232	15.0	400.0	5.800						
RCPT22-22CPT232	22-02-23796_RP22-22CPT232	15.0	1200.0	8.400						
RSCPT22-22CPT233	22-02-23796_RS22-22CPT233	15.0	1100.0	5.925	3.93		2.00			
RCPT22-22CPT234	22-02-23796_RP22-22CPT234	15.0	700.0	3.925						
RCPT22-22CPT234	22-02-23796_RP22-22CPT234	15.0	1200.0	11.150						
RCPT22-22CPT235	22-02-23796_RP22-22CPT235	15.0	1200.0	3.850						
RCPT22-22CPT236	22-02-23796_RP22-22CPT236	15.0	1210.0	5.900						
RCPT22-22CPT237	22-02-23796_RP22-22CPT237	15.0	1200.0	5.550						
RCPT22-22CPT238	22-02-23796_RP22-22CPT238	15.0	990.0	3.875	0.68		3.20			
RCPT22-22CPT238	22-02-23796_RP22-22CPT238	15.0	800.0	9.875	6.68		3.20			
RSCPT22-22CPT239	22-02-23796_RS22-22CPT239	15.0	800.0	5.925	1.93		4.00			
RSCPT22-22CPT239	22-02-23796_RS22-22CPT239	15.0	400.0	9.900						
RCPT22-22CPT240	22-02-23796_RP22-22CPT240	15.0	1200.0	5.975						
RCPT22-22CPT240	22-02-23796_RP22-22CPT240	15.0	900.0	11.950	8.75		3.20			
RCPT22-22CPT241	22-02-23796_RP22-22CPT241	15.0	1200.0	5.850	1.85		4.00			
RCPT22-22CPT242	22-02-23796_RP22-22CPT242	15.0	1200.0	4.825						
RCPT22-22CPT242	22-02-23796_RP22-22CPT242	15.0	900.0	10.925						
RCPT22-22CPT243A	22-02-23796_RP22-22CPT243A	15.0	900.0	5.900	1.90		4.00			
RCPT22-22CPT243A	22-02-23796_RP22-22CPT243A	15.0	1000.0	8.925	4.93		4.00			

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT244	22-02-23796_RP22-22CPT244	15.0	950.0	6.825						
RCPT22-22CPT244	22-02-23796_RP22-22CPT244	15.0	900.0	11.250	7.25		4.00			
RSCPT22-22CPT245	22-02-23796_RS22-22CPT245	15.0	800.0	7.725	4.63		3.10			
RSCPT22-22CPT245	22-02-23796_RS22-22CPT245	15.0	300.0	10.725						
RCPT22-22CPT246	22-02-23796_RP22-22CPT246	15.0	1200.0	5.425						
RCPT22-22CPT247	22-02-23796_RP22-22CPT247	15.0	1200.0	6.100						
RCPT22-22CPT248	22-02-23796_RP22-22CPT248	15.0	1200.0	3.850						
RCPT22-22CPT248	22-02-23796_RP22-22CPT248	15.0	1200.0	10.875						
RCPT22-22CPT249	22-02-23796_RP22-22CPT249	15.0	790.0	4.725						
RCPT22-22CPT249	22-02-23796_RP22-22CPT249	15.0	1200.0	12.000						
RCPT22-22CPT250	22-02-23796_RP22-22CPT250	15.0	700.0	3.875						
RCPT22-22CPT251	22-02-23796_RP22-22CPT251	15.0	1190.0	4.825						
RSCPT22-22CPT252	22-02-23796_RS22-22CPT252	15.0	900.0	5.800						
RSCPT22-22CPT252	22-02-23796_RS22-22CPT252	15.0	1200.0	6.825						
RSCPT22-22CPT252	22-02-23796_RS22-22CPT252	15.0	500.0	9.825						
RCPT22-22CPT253	22-02-23796_RP22_22CPT253	15.0	1200.0	4.850						
RCPT22-22CPT253	22-02-23796_RP22_22CPT253	15.0	1190.0	12.025						
RCPT22-22CPT254	22-02-23796_RP22-22CPT254	15.0	700.0	4.900						
RCPT22-22CPT254	22-02-23796_RP22-22CPT254	15.0	1000.0	12.025						
RCPT22-22CPT255	22-02-23796_RP22-22CPT255	15.0	1200.0	6.875						

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RSCPT22-22CPT256	22-02-23796_RS22-22CPT256	15.0	1200.0	7.525						
RCPT22-22CPT257	22-02-23796_RP22-22CPT257	15.0	380.0	2.625						
RCPT22-22CPT257	22-02-23796_RP22-22CPT257	15.0	1200.0	8.275						
RCPT22-22CPT258	22-02-23796_RP22-22CPT258	15.0	1200.0	6.500						
RCPT22-22CPT259	22-02-23796_RP22-22CPT259	15.0	400.0	5.900						
RCPT22-22CPT259	22-02-23796_RP22-22CPT259	15.0	990.0	8.250						
RCPT22-22CPT260	22-02-23796_RP22-22CPT260	15.0	400.0	4.825						
RCPT22-22CPT260	22-02-23796_RP22-22CPT260	15.0	300.0	7.825						
RCPT22-22CPT261	22-02-23796_RP22-22CPT261	15.0	1200.0	4.850						
RCPT22-22CPT261	22-02-23796_RP22-22CPT261	15.0	1200.0	12.025						
RCPT22-22CPT262	22-02-23796_RP22-22CPT262	15.0	1190.0	4.900						
RCPT22-22CPT263	22-02-23796_RP22-22CPT263	15.0	800.0	3.750						
RCPT22-22CPT264	22-02-23796_RP22-22CPT264	15.0	1040.0	6.200						
RCPT22-22CPT265	22-02-23796_RP22-22CPT265	15.0	1100.0	5.475						
RCPT22-22CPT266	22-02-23796_RP22-22CPT266	15.0	1300.0	3.850						
RCPT22-22CPT267	22-02-23796_RP22-22CPT267	15.0	1200.0	5.825						
RCPT22-22CPT267	22-02-23796_RP22-22CPT267	15.0	1200.0	12.025						
RCPT22-22CPT270	22-02-23796_RP22-22CPT270	15.0	1000.0	4.825						
RCPT22-22CPT271	22-02-23796_RP22-22CPT271	15.0	1200.0	5.800						
RCPT22-22CPT271	22-02-23796_RP22-22CPT271	15.0	1200.0	8.550						

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT272	22-02-23796_RP22-22CPT272	15.0	1200.0	6.100						
RCPT22-22CPT272	22-02-23796_RP22-22CPT272	15.0	325.0	9.250						
RCPT22-22CPT273	22-02-23796_RP22-22CPT273	15.0	1000.0	5.475						
RCPT22-22CPT274	22-02-23796_RP22-22CPT274	15.0	1200.0	4.850						
RCPT22-22CPT275	22-02-23796_RP22-22CPT275	15.0	1200.0	8.000						
RCPT22-22CPT276B	22-02-23796_RP22-22CPT276B	15.0	1210.0	4.950						
RCPT22-22CPT277	22-02-23796_RP22-22CPT277	15.0	1200.0	5.450						
RCPT22-22CPT278	22-02-23796_RP22-22CPT278	15.0	315.0	4.825						
RCPT22-22CPT279	22-02-23796_RP22-22CPT279	15.0	1200.0	2.850						
RCPT22-22CPT279	22-02-23796_RP22-22CPT279	15.0	1200.0	5.900						
RCPT22-22CPT280	22-02-23796_RP22-22CPT280	15.0	1200.0	4.300						
RCPT22-22CPT280	22-02-23796_RP22-22CPT280	15.0	300.0	12.025						
RCPT22-22CPT281	22-02-23796_RP22-22CPT281	15.0	600.0	6.875						
RCPT22-22CPT281	22-02-23796_RP22-22CPT281	15.0	300.0	7.675						
RCPT22-22CPT282	22-02-23796_RP22-22CPT282	15.0	1200.0	7.475						
RCPT22-22CPT283	22-02-23796_RP22-22CPT283	15.0	1200.0	4.875						
RCPT22-22CPT284	22-02-23796_RP22-22CPT284	15.0	1200.0	5.125						
RCPT22-22CPT284	22-02-23796_RP22-22CPT284	15.0	600.0	10.075						
RCPT22-22CPT286	22-02-23796_RP22-22CPT286	15.0	700.0	3.925						
RCPT22-22CPT286	22-02-23796_RP22-22CPT286	15.0	1090.0	10.775						

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT287	22-02-23796_RP22_22CPT287	15.0	1200.0	4.800						
RCPT22-22CPT288	22-02-23796_RP22-22CPT288	15.0	1200.0	5.900	4.0	1.9		13	100	52.0
RCPT22-22CPT300	22-02-23796_RP22-22CPT300	15.0	800.0	7.825						
RCPT22-22CPT301B	22-02-23796_RP22-22CPT301B	15.0	800.0	8.500						
RSCPT22-22CPT302	22-02-23796_RS22-22CPT302	15.0	1200.0	5.900						
RSCPT22-22CPT302	22-02-23796_RS22-22CPT302	15.0	1100.0	8.900						
RSCPT22-22CPT302	22-02-23796_RS22-22CPT302	15.0	400.0	12.075						
RCPT22-22CPT303	22-02-23796_RP22-22CPT303	15.0	800.0	7.775						
RCPT22-22CPT304	22-02-23796_RP22-22CPT304	15.0	900.0	5.875						
RCPT22-22CPT305	22-02-23796_RP22-22CPT305	15.0	700.0	8.850	4.4	4.5		34	100	20.9
RCPT22-22CPT306	22-02-23796_RP22-22CPT306	15.0	900.0	5.800						
RSCPT22-22CPT308	22-02-23796_RS22-22CPT308	15.0	1200.0	4.750	1.7	3.1		3	100	265.7
RSCPT22-22CPT308	22-02-23796_RS22-22CPT308	15.0	1200.0	6.750						
RCPT22-22CPT309	22-02-23796_RP22-22CPT309	15.0	1200.0	4.800						
RCPT22-22CPT310	22-02-23796_RP22-22CPT310	15.0	1200.0	6.875	3.3	3.6				
RCPT22-22CPT311	22-02-23796_RP22-22CPT311	15.0	1500.0	6.850						
RCPT22-22CPT312	22-02-23796_RP22-22CPT312	15.0	1200.0	4.900	1.9	3.0		9	100	82.4
RCPT22-22CPT313	22-02-23796_RP22-22CPT313	15.0	1300.0	7.025						
RSCPT22-22CPT314	22-02-23796_RS22-22CPT314	15.0	1200.0	3.875	1.2	2.7		8	100	89.1
RSCPT22-22CPT314	22-02-23796_RS22-22CPT314	15.0	1200.0	9.875						

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT315	22-02-23796_RP22-22CPT315	15.0	1100.0	5.850						
RCPT22-22CPT316	22-02-23796_RP22-22CPT316	15.0	1000.0	7.350						
RCPT22-22CPT317	22-02-23796_RP22-22CPT317	15.0	890.0	4.950						
RCPT22-22CPT317	22-02-23796_RP22-22CPT317	15.0	1100.0	7.900	6.6	1.3		132	100	5.3
RCPT22-22CPT318	22-02-23796_RP22-22CPT318	15.0	1200.0	5.850						
RCPT22-22CPT319	22-02-23796_RP22-22CPT319	15.0	1200.0	4.775						
RSCPT22-22CPT320	22-02-23796_RS22-22CPT320	15.0	1200.0	6.775						
RCPT22-22CPT321	22-02-23796_RP22-22CPT321	15.0	1200.0	5.875						
RCPT22-22CPT322	22-02-23796_RP22-22CPT322	15.0	900.0	7.025						
RCPT22-22CPT323	22-02-23796_RP22-22CPT323	15.0	1400.0	7.825						
RCPT22-22CPT324	22-02-23796_RP22-22CPT324	15.0	800.0	3.875						
RCPT22-22CPT325	22-02-23796_RP22-22CPT325	15.0	1200.0	5.925						
RCPT22-22CPT327	22-02-23796_RP22-22CPT327	15.0	1190.0	5.850						
RSCPT22-22CPT328	22-02-23796_RS22-22CPT328	15.0	700.0	4.875						
RCPT22-22CPT329	22-02-23796_RP22-22CPT329	15.0	1300.0	3.750						
RCPT22-22CPT330	22-02-23796_RP22-22CPT330	15.0	1100.0	4.750	3.1	1.7				
RCPT22-22CPT331	22-02-23796_RP22-22CPT331	15.0	900.0	6.875	5.8	1.1				
RCPT22-22CPT332	22-02-23796_RP22-22CPT332	15.0	1200.0	7.325						
RSCPT22-22CPT334	22-02-23796_RS22-22CPT334	15.0	1200.0	6.325						
RCPT22-22CPT335B	22-02-23796_RP22-22CPT335B	15.0	1200.0	7.850						

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT336	22-02-23796_RP22-22CPT336	15.0	1200.0	4.925						
RCPT22-22CPT337	22-02-23796_RP22-22CPT337	15.0	700.0	6.850						
RCPT22-22CPT337	22-02-23796_RP22-22CPT337	15.0	1200.0	8.225						
RSCPT22-22CPT339	22-02-23796_RS22-22CPT339	15.0	1200.0	7.850						
RCPT22-22CPT340	22-02-23796_RP22-22CPT340	15.0	1300.0	9.700						
RCPT22-22CPT341	22-02-23796_RP22-22CPT341	15.0	1000.0	5.750						
RCPT22-22CPT343	22-02-23796_RP22-22CPT343	15.0	1200.0	7.900	5.2	2.7		40	100	17.6
RCPT22-22CPT344	22-02-23796_RP22-22CPT344	15.0	800.0	9.125	4.1	1.7		4	100	185.7
RCPT22-22CPT345	22-02-23796_RP22-22CPT345	15.0	1200.0	6.825						
RCPT22-22CPT346	22-02-23796_RP22-22CPT346	15.0	1200.0	5.800						
RCPT22-22CPT347	22-02-23796_RP22-22CPT347	15.0	1000.0	5.850						
RCPT22-22CPT348	22-02-23796_RP22-22CPT348	15.0	1190.0	4.825						
RCPT22-22CPT351	22-02-23796_RP22-22CPT351	15.0	900.0	4.800						
RCPT22-22CPT352	22-02-23796_RP22-22CPT352	15.0	800.0	5.800						
RCPT22-22CPT353C	22-02-23796_RP22-22CPT353C	15.0	1200.0	8.025						
RCPT22-22CPT354	22-02-23796_RP22-22CPT354	15.0	1200.0	4.900						
RCPT22-22CPT355	22-02-23796_RP22-22CPT355	15.0	1200.0	4.875						
RCPT22-22CPT355	22-02-23796_RP22-22CPT355	15.0	1200.0	9.075						
RCPT22-22CPT356	22-02-23796_RP22-22CPT356	15.0	1200.0	7.325						
RCPT22-22CPT356	22-02-23796_RP22-22CPT356	15.0	1080.0	10.225						

Job No:	22-02-23796
Client:	MPE Engineering Ltd.
Project:	Snake Lake Dam Alignment
Start Date:	19-Mar-2022
End Date:	15-Apr-2022

CPTu PORE PRESSURE DISSIPATION SUMMARY

Sounding ID	File Name	Cone Area (cm^2)	Duration (s)	Test Depth (m)	Estimated Equilibrium Pore Pressure U_{eq} (m)	Calculated Phreatic Surface (m)	Estimated Phreatic Surface (m)	t_{50} [a] (s)	Assumed Rigidity Index (I_r)	c_h [b] (cm^2/min)
RCPT22-22CPT357	22-02-23796_RP22-22CPT357	15.0	1200.0	3.925						
RCPT22-22CPT358	22-02-23796_RP22-22CPT358	15.0	800.0	5.925						
RCPT22-22CPT359	22-02-23796_RP22-22CPT359	15.0	1300.0	7.950						

a. Time is relative to where umax occurred.


b. Houlsby and Teh, 1991.

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/19/2022 09:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT100
Cone: 750:T1500F15U35 Area=15 cm²

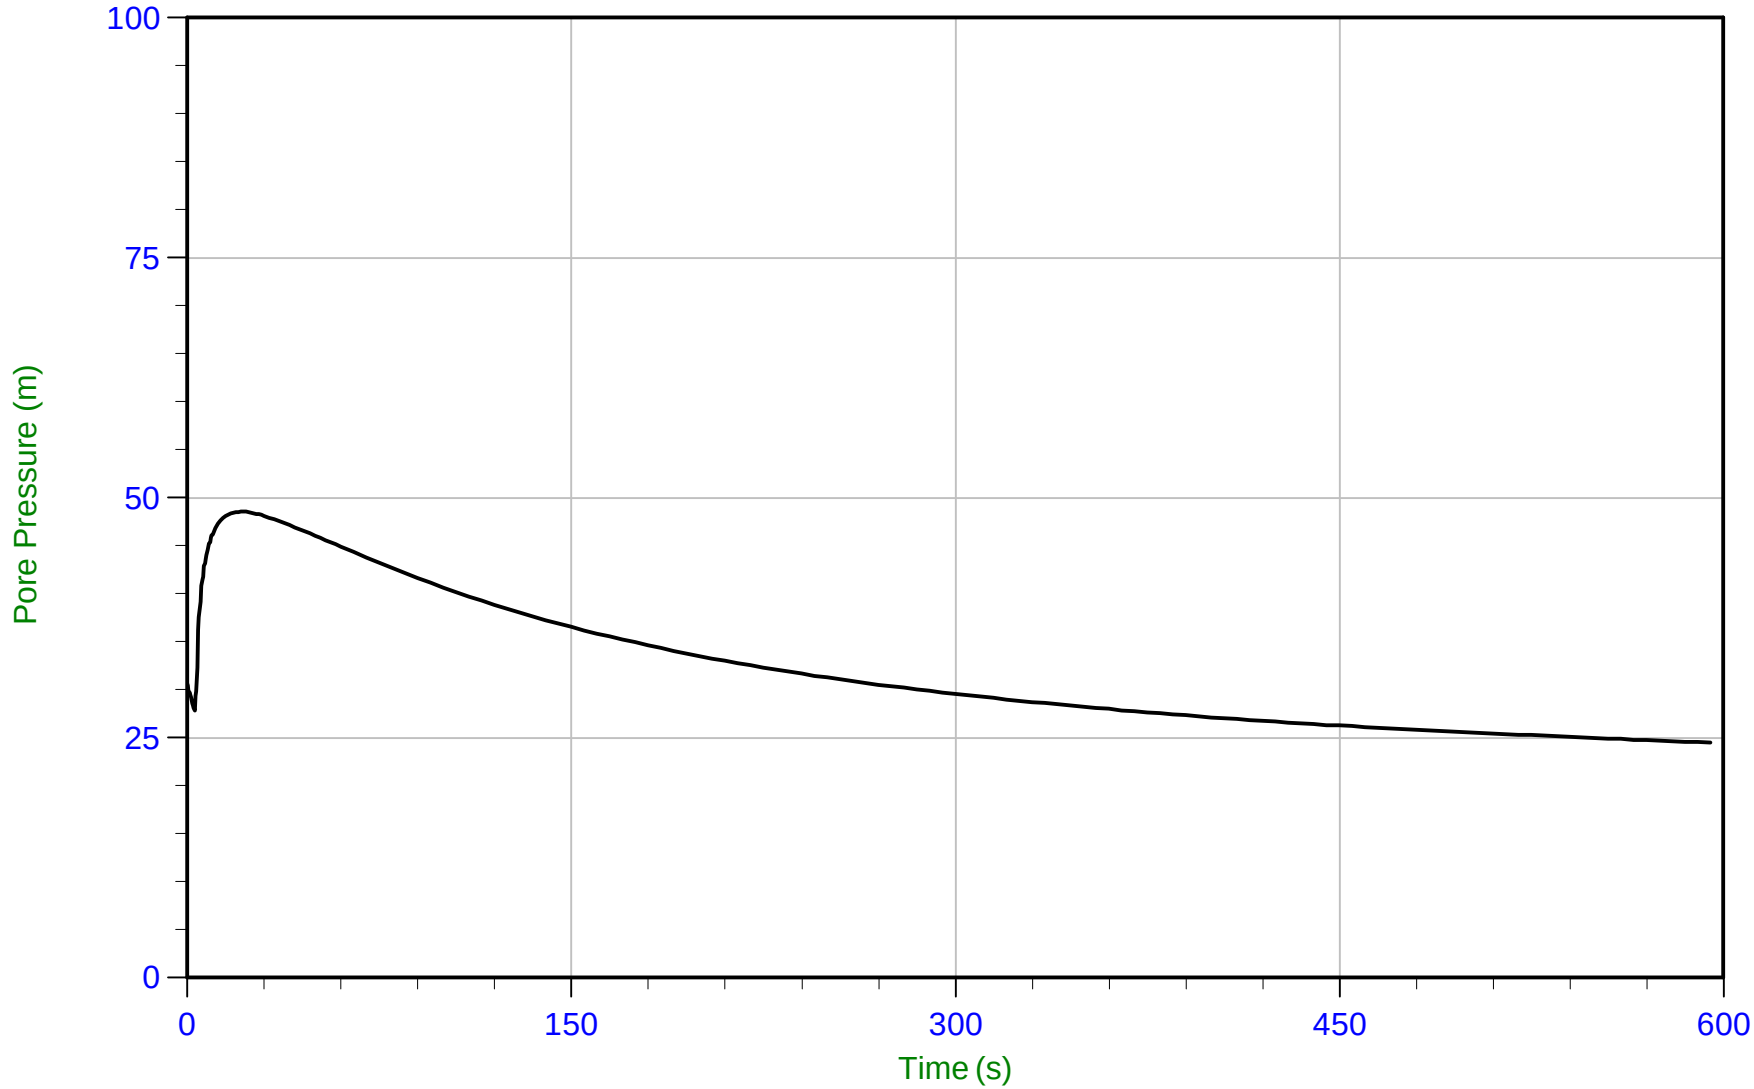

Trace Summary:

Filename: 22-02-23796_RS22-22CPT100.PPF
Depth: 9.750 m / 31.988 ft
Duration: 595.0 s


u Min: 24.5 m
u Max: 48.6 m
u Final: 24.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/19/2022 09:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT100
Cone: 750:T1500F15U35 Area=15 cm²

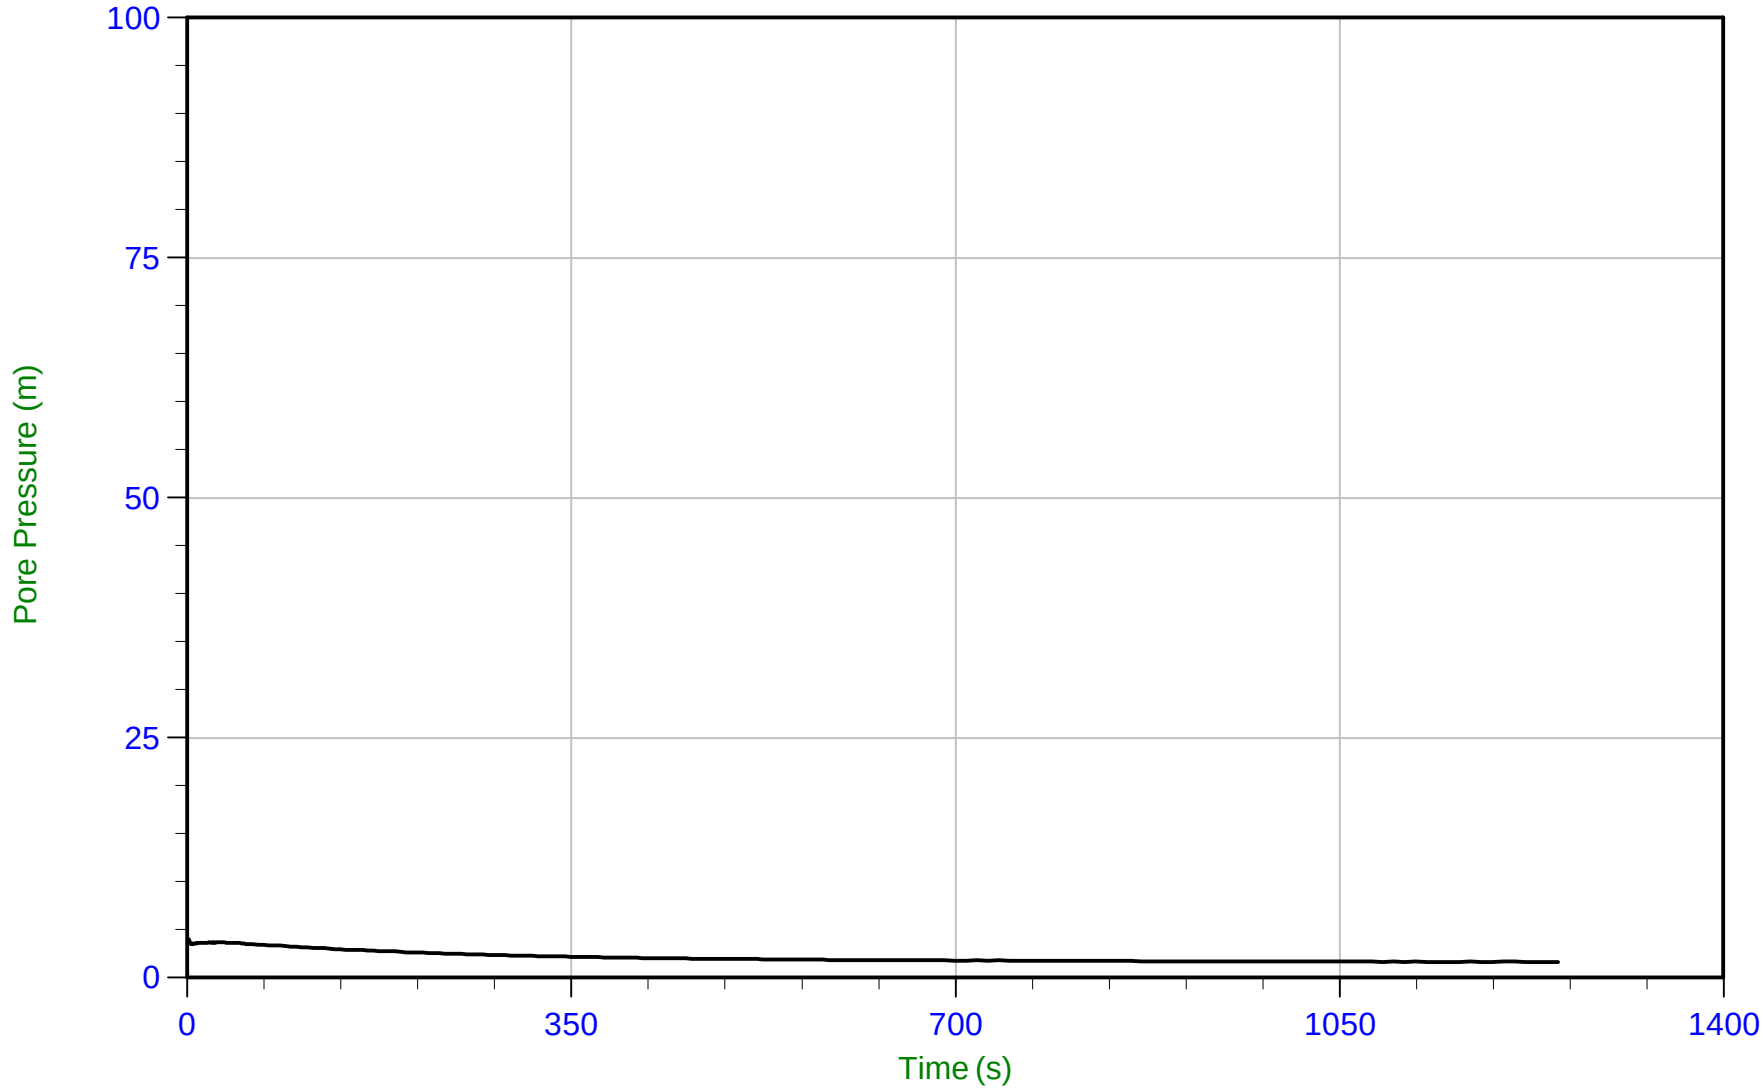

Trace Summary:

Filename: 22-02-23796_RS22-22CPT100.PPF
Depth: 15.725 m / 51.591 ft
Duration: 1250.0 s


u Min: 1.6 m
u Max: 4.0 m
u Final: 1.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/19/2022 11:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT101
Cone: 750:T1500F15U35 Area=15 cm²

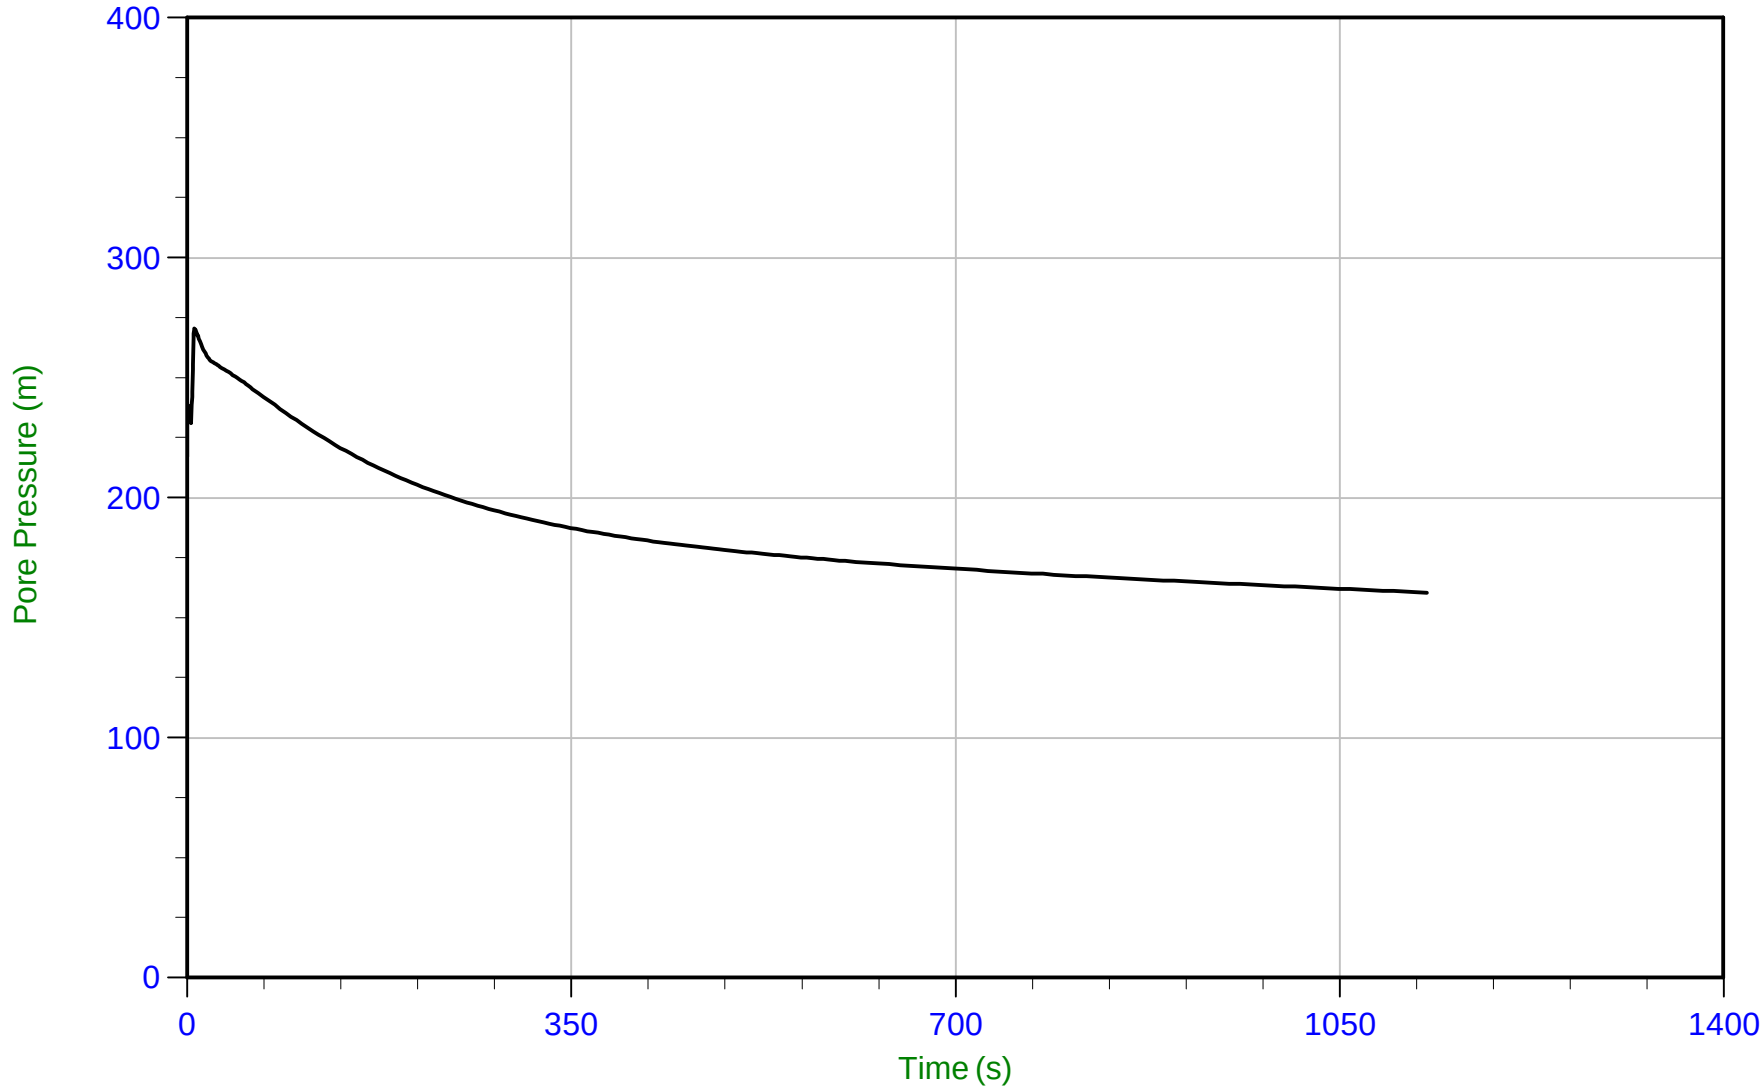

Trace Summary:

Filename: 22-02-23796_RP22-22CPT101.PPF
Depth: 8.900 m / 29.199 ft
Duration: 1130.0 s


u Min: 160.5 m
u Max: 270.4 m
u Final: 160.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/19/2022 11:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT101
Cone: 750:T1500F15U35 Area=15 cm²

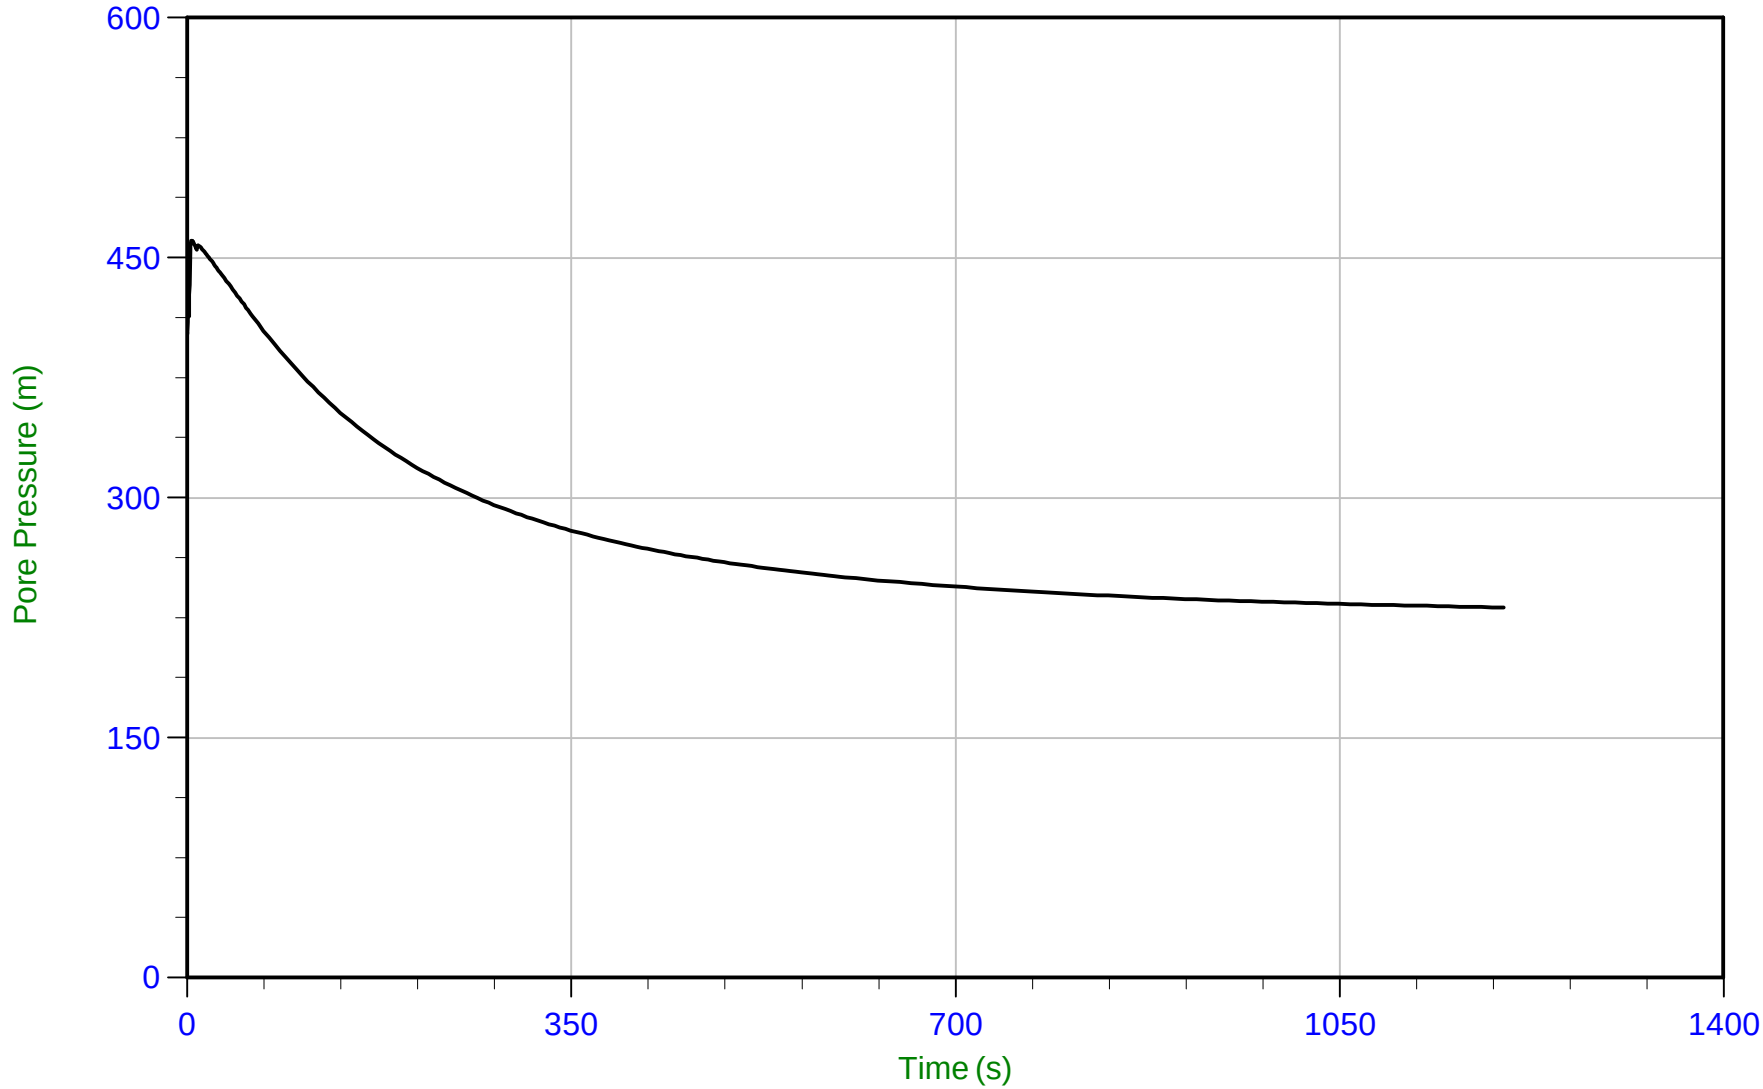

Trace Summary:

Filename: 22-02-23796_RP22-22CPT101.PPF
Depth: 12.550 m / 41.174 ft
Duration: 1200.0 s


u Min: 231.4 m
u Max: 460.6 m
u Final: 231.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/19/2022 13:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT102
Cone: 651:T1500F15U35 Area=15 cm²

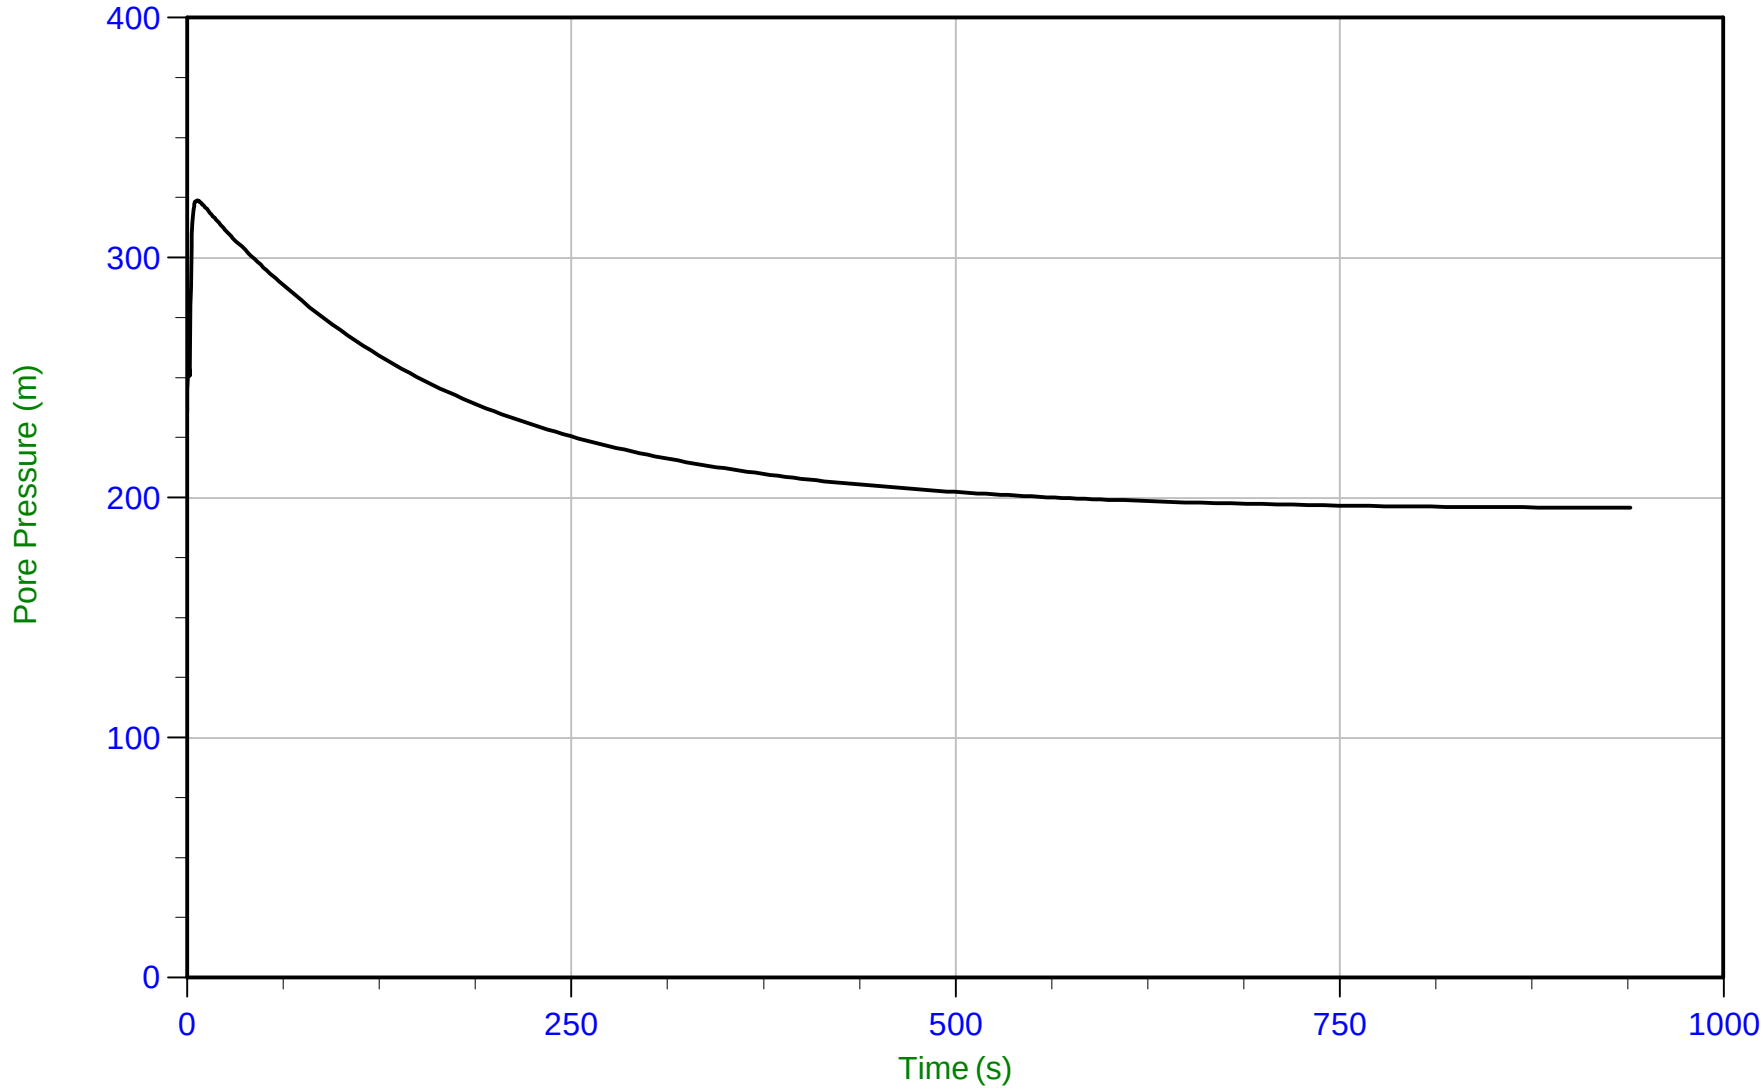

Trace Summary:

Filename: 22-02-23796_RP22-22CPT102.PPF
Depth: 6.900 m / 22.638 ft
Duration: 940.0 s


u Min: 195.9 m
u Max: 323.9 m
u Final: 195.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/19/2022 13:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT102
Cone: 651:T1500F15U35 Area=15 cm²

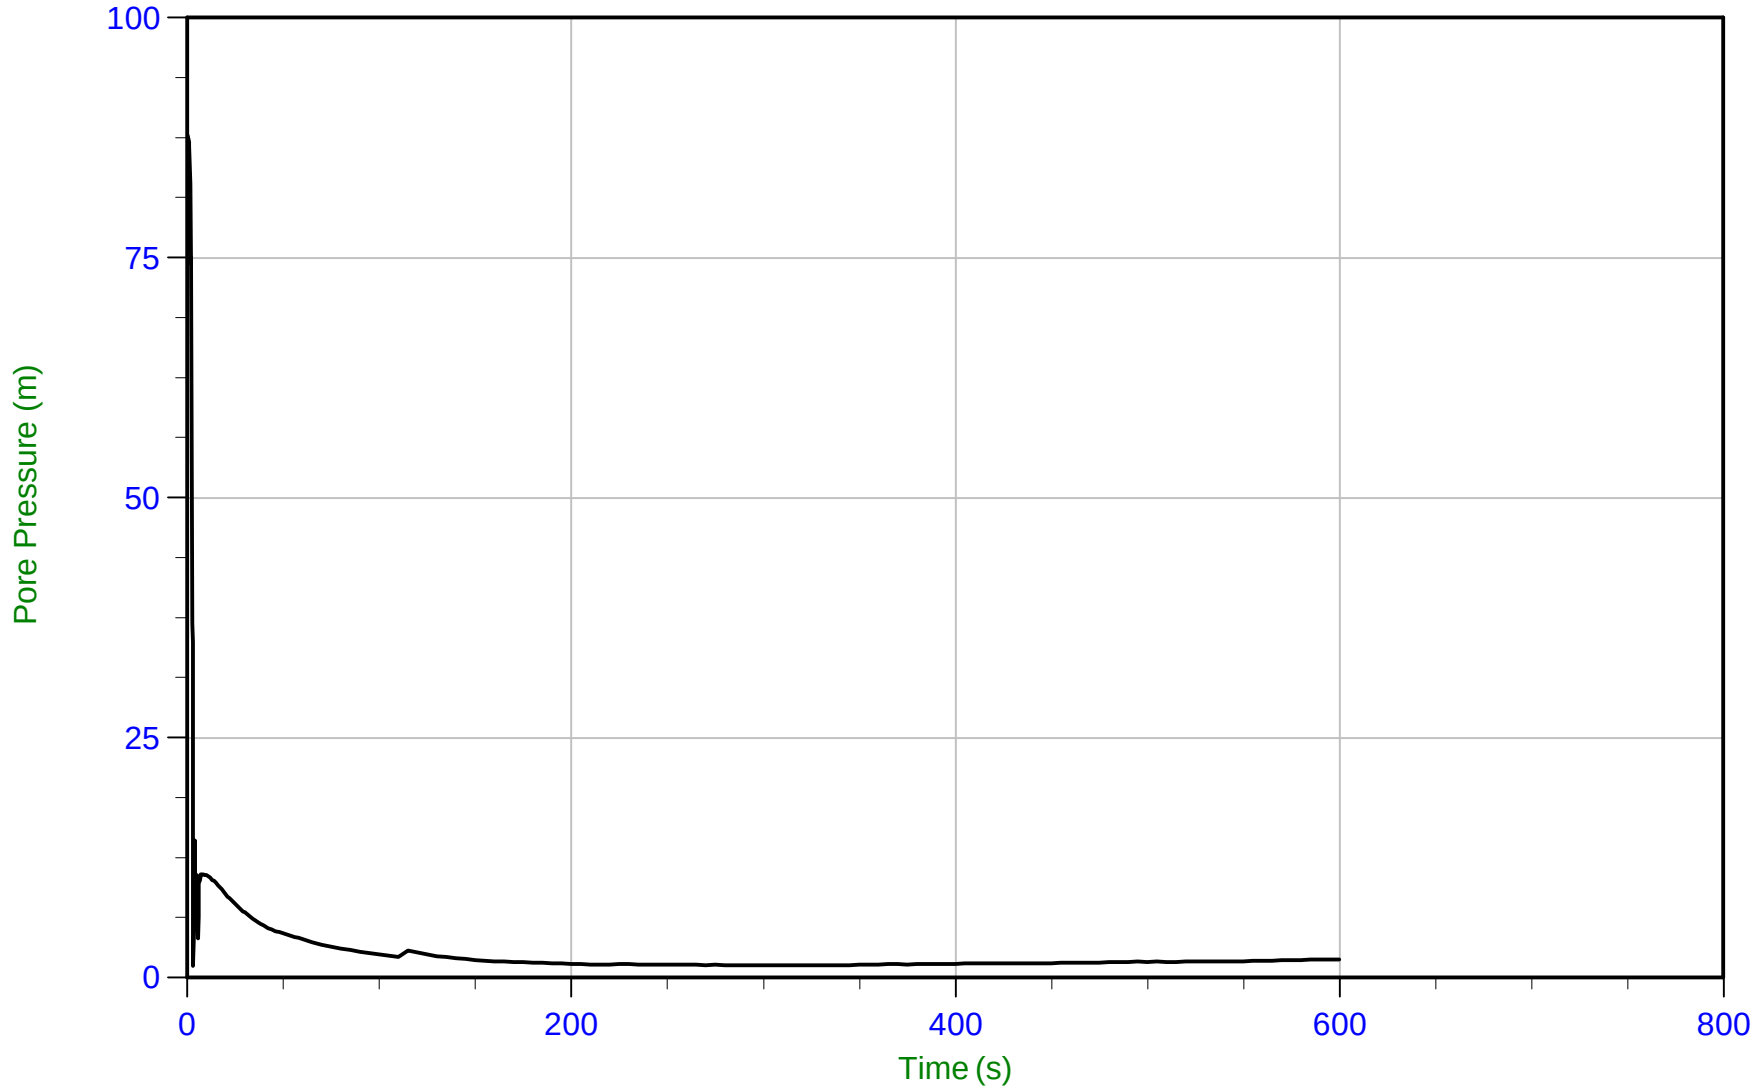

Trace Summary:

Filename: 22-02-23796_RP22-22CPT102.PPF
Depth: 9.925 m / 32.562 ft
Duration: 600.0 s


u Min: 1.2 m
u Max: 87.8 m
u Final: 1.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/19/2022 15:27
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT103
Cone: 651:T1500F15U35 Area=15 cm²

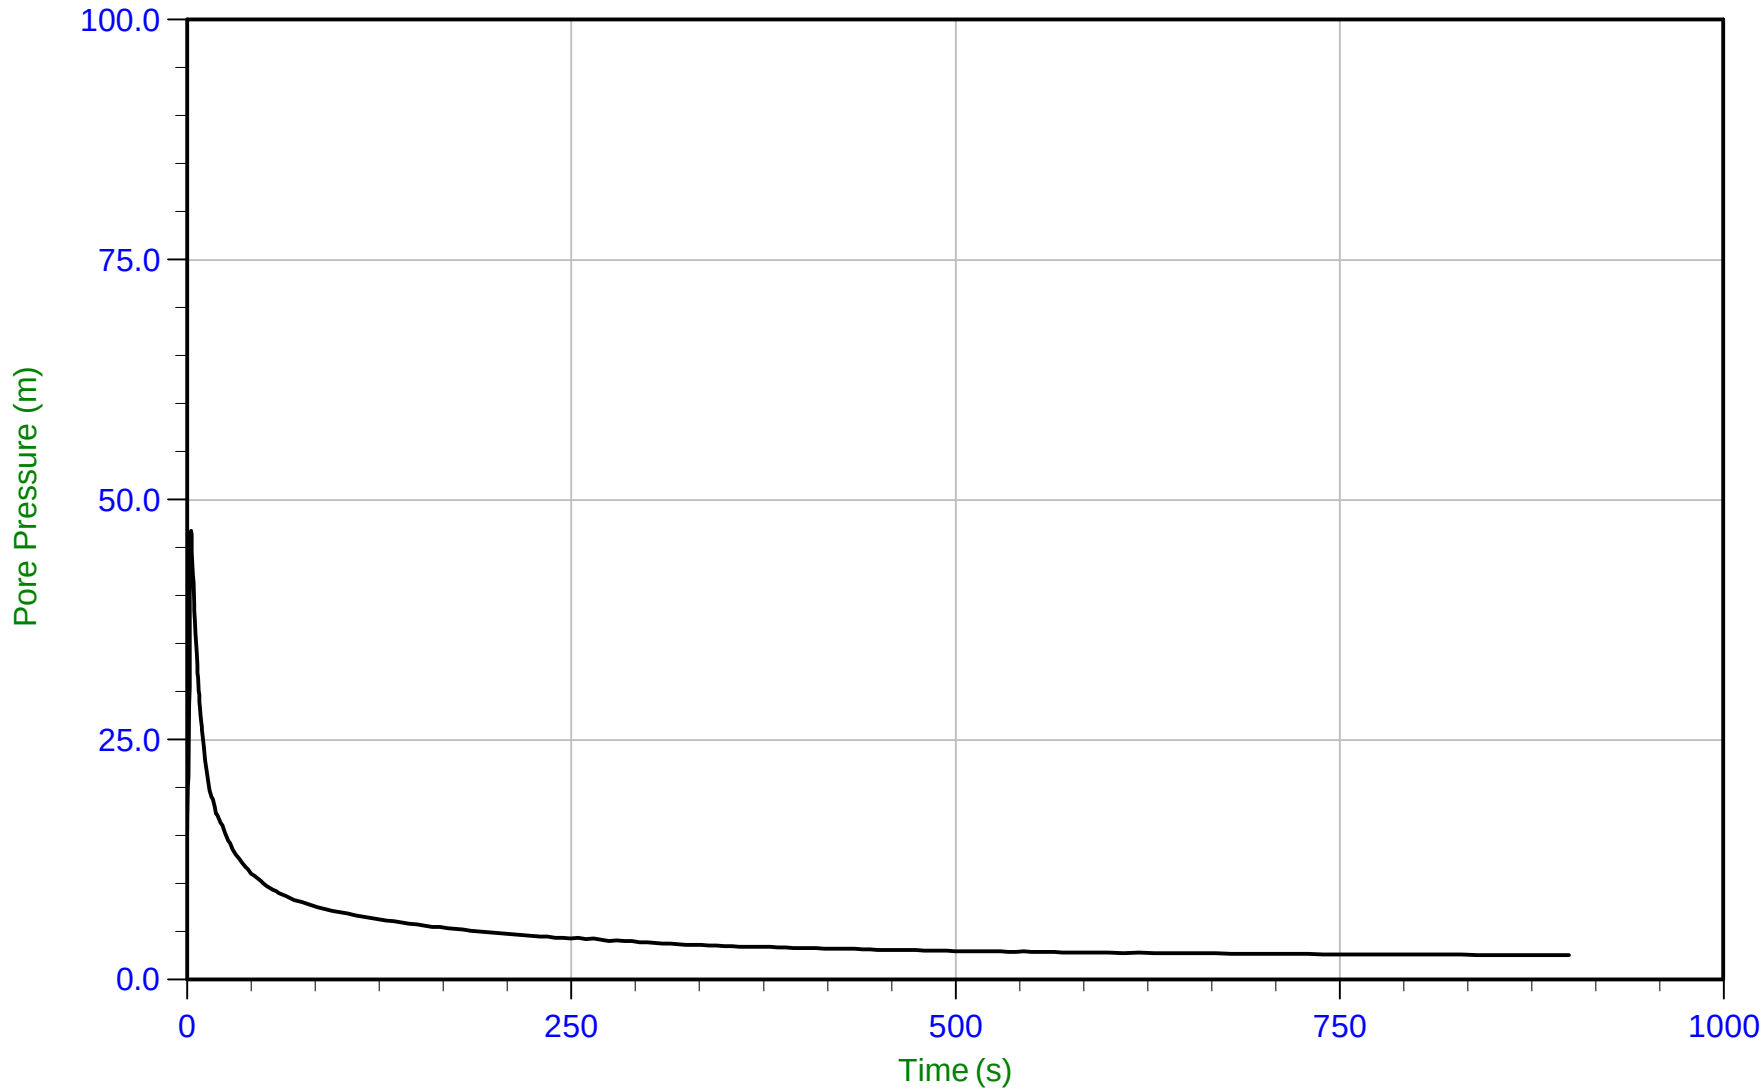

Trace Summary:

Filename: 22-02-23796_RS22-22CPT103.PPF
Depth: 4.850 m / 15.912 ft
Duration: 900.0 s

u Min: 2.6 m
u Max: 46.8 m
u Final: 2.6 m


WT: 2.218 m / 7.277 ft
Ueq: 2.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/19/2022 16:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT104
Cone: 651:T1500F15U35 Area=15 cm²

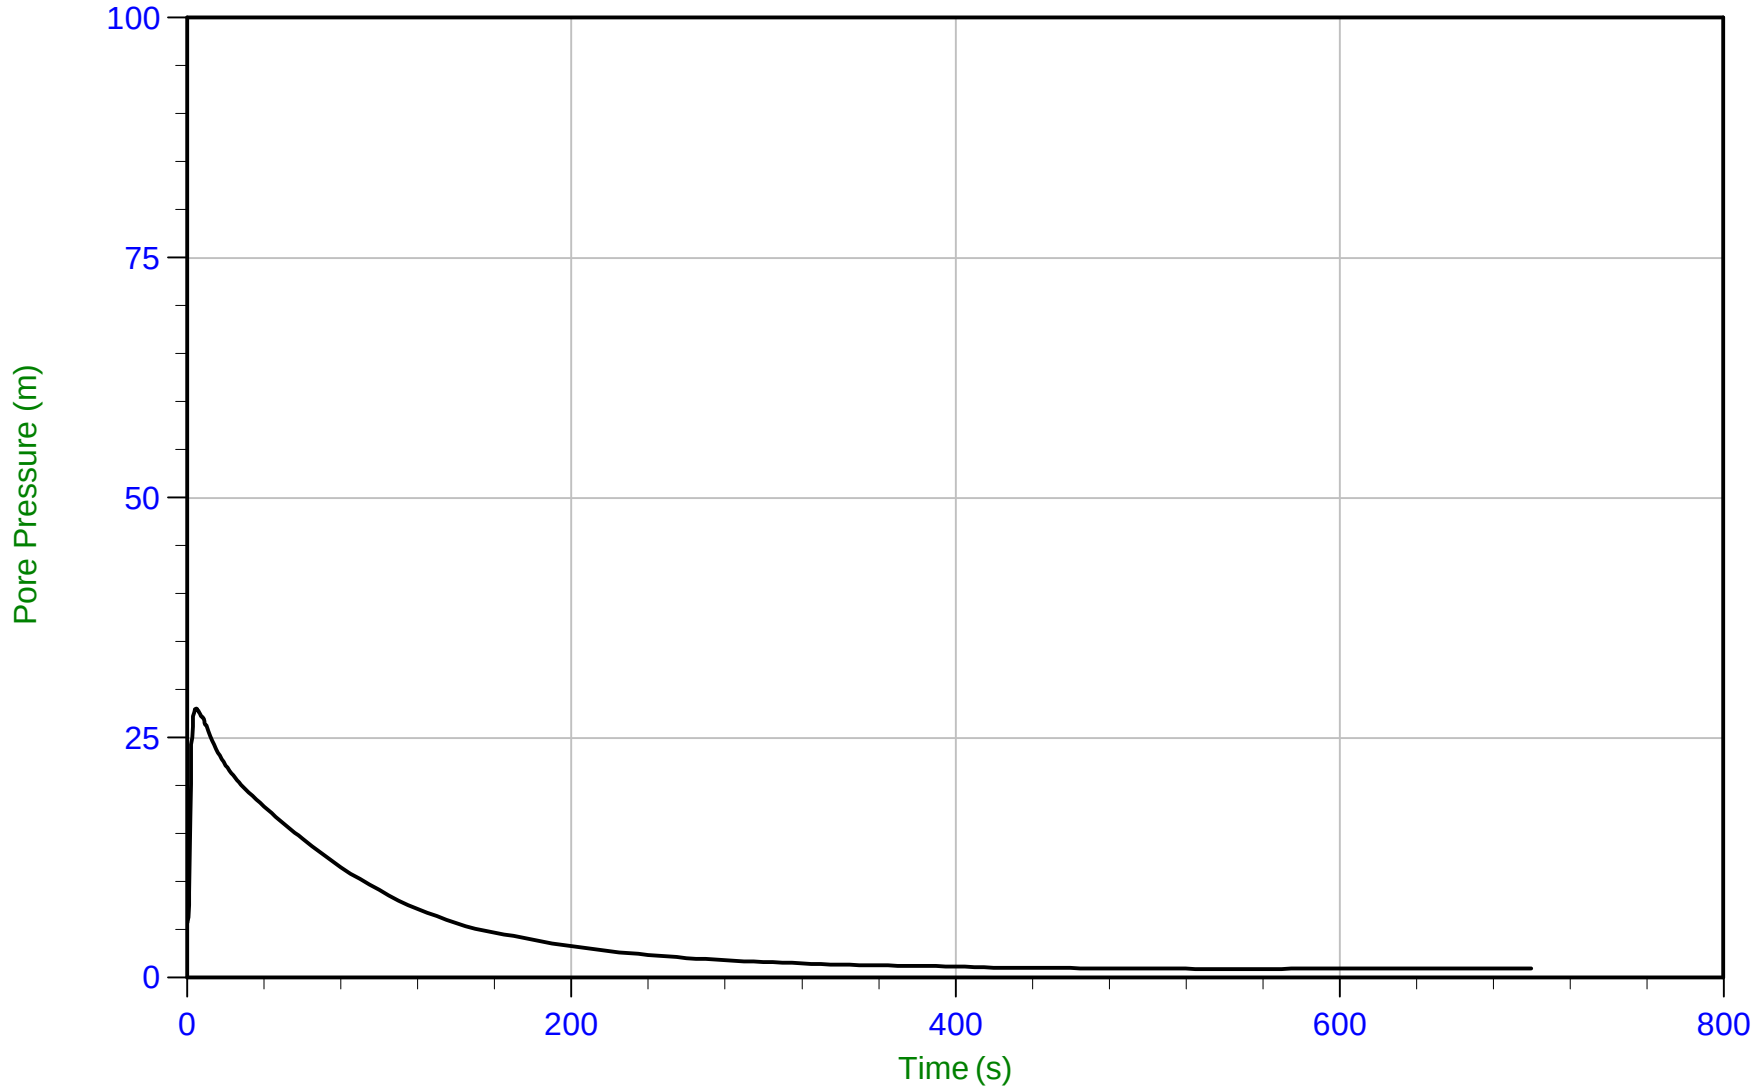

Trace Summary:

Filename: 22-02-23796_RP22-22CPT104.PPF
Depth: 5.900 m / 19.357 ft
Duration: 700.0 s

u Min: 0.9 m
u Max: 28.1 m
u Final: 1.0 m


WT: 4.900 m / 16.076 ft
Ueq: 1.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT105
Cone: 651:T1500F15U35 Area=15 cm²

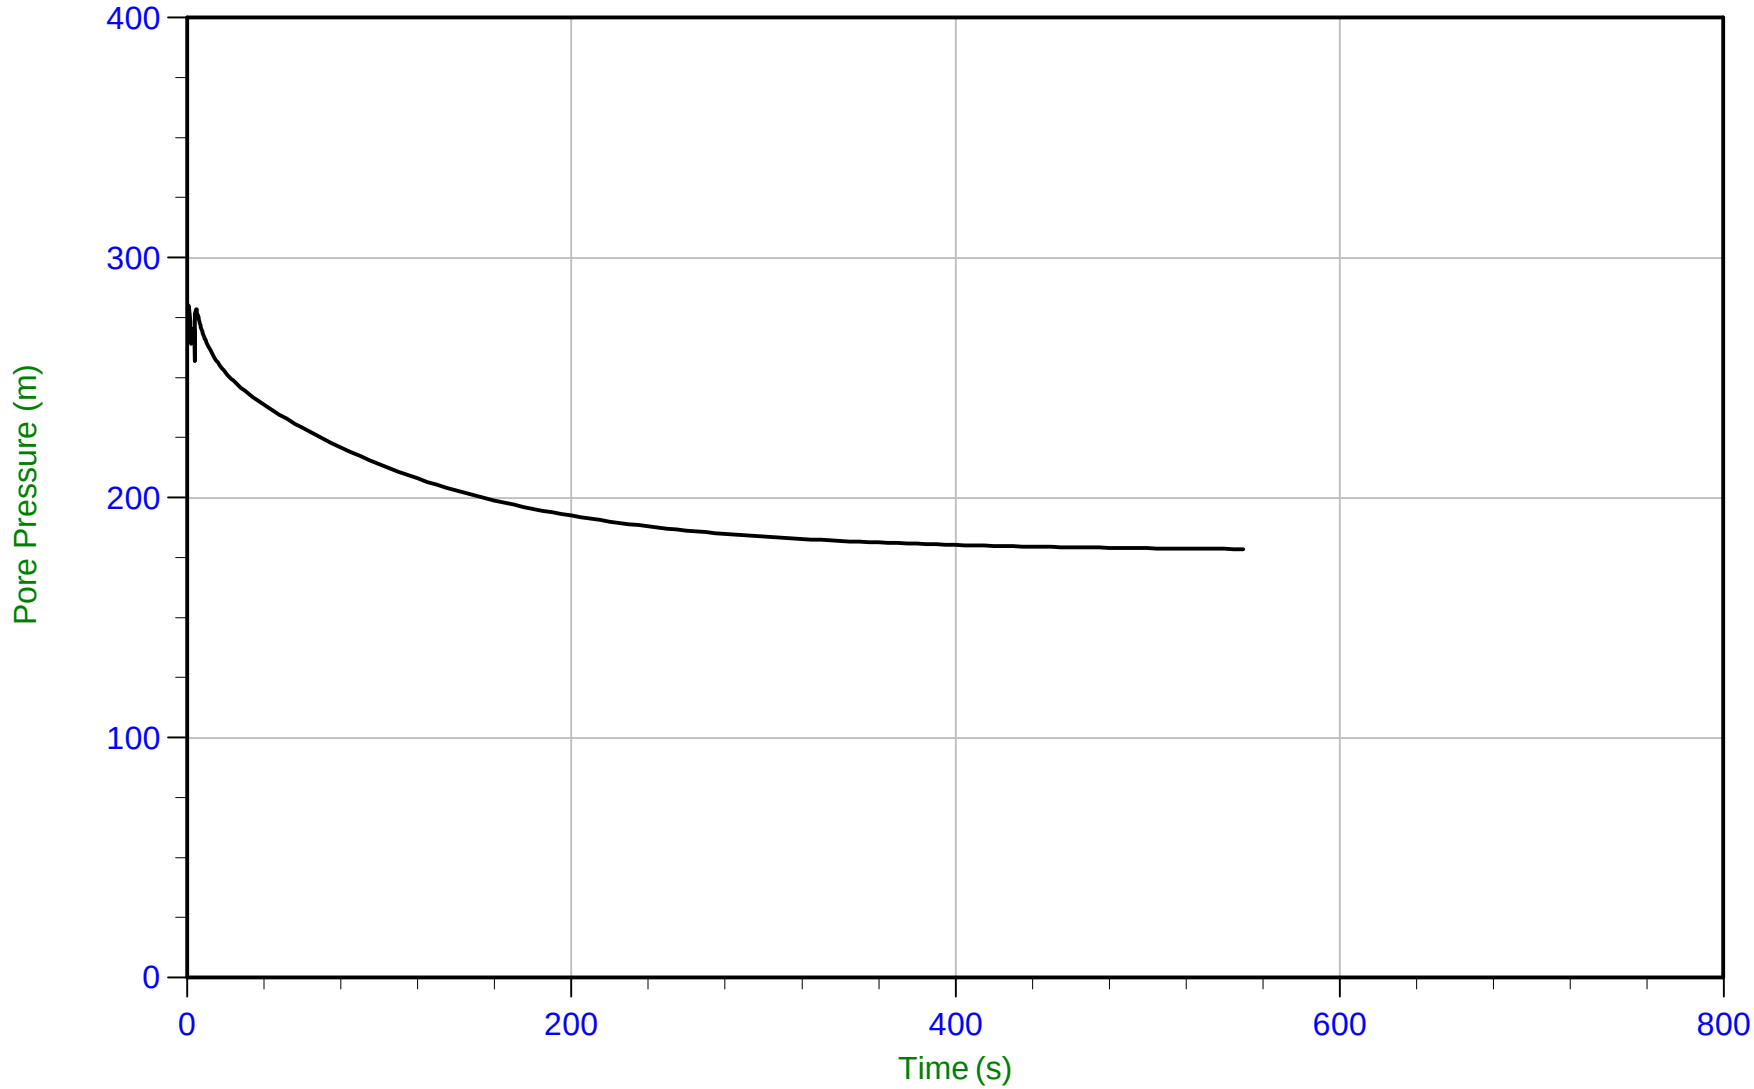

Trace Summary:

Filename: 22-02-23796_RP22-22CPT105.PPF
Depth: 5.825 m / 19.111 ft
Duration: 550.0 s


u Min: 178.6 m
u Max: 280.1 m
u Final: 178.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT105
Cone: 651:T1500F15U35 Area=15 cm²

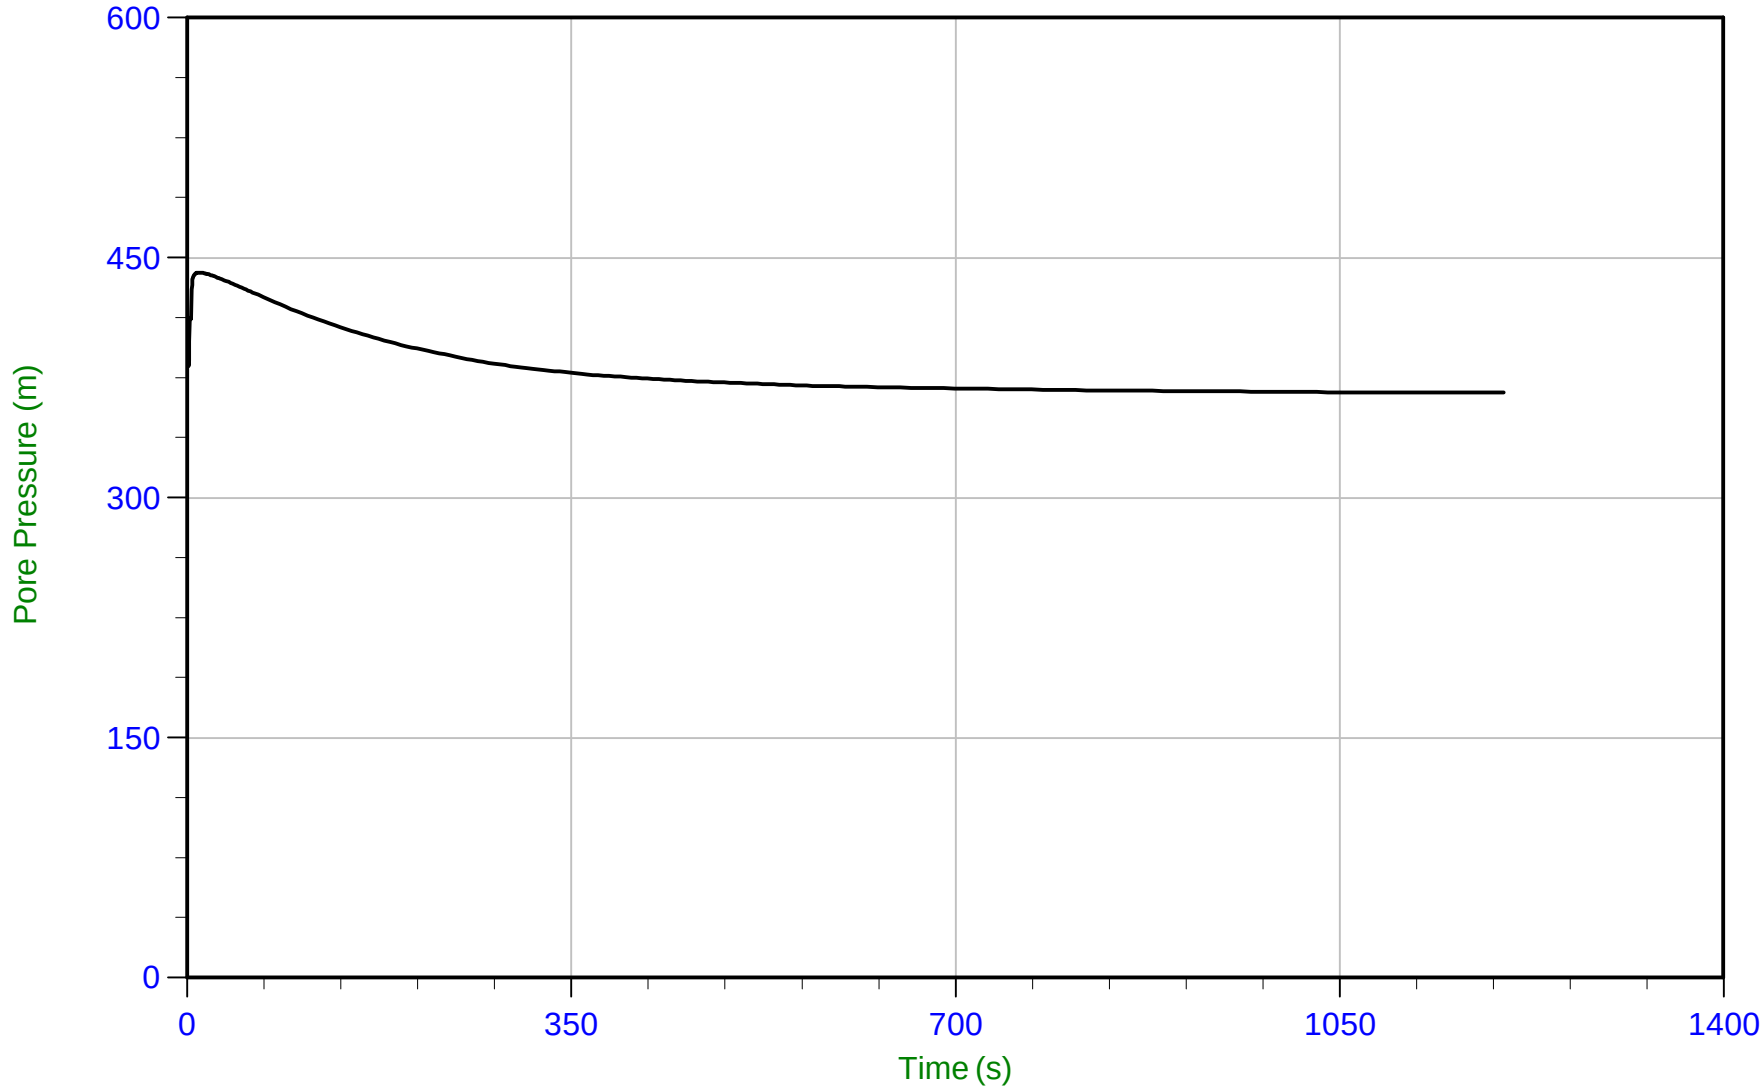

Trace Summary:

Filename: 22-02-23796_RP22-22CPT105.PPF
Depth: 6.100 m / 20.013 ft
Duration: 1200.0 s


u Min: 365.8 m
u Max: 440.7 m
u Final: 365.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 11:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT106
Cone: 651:T1500F15U35 Area=15 cm²

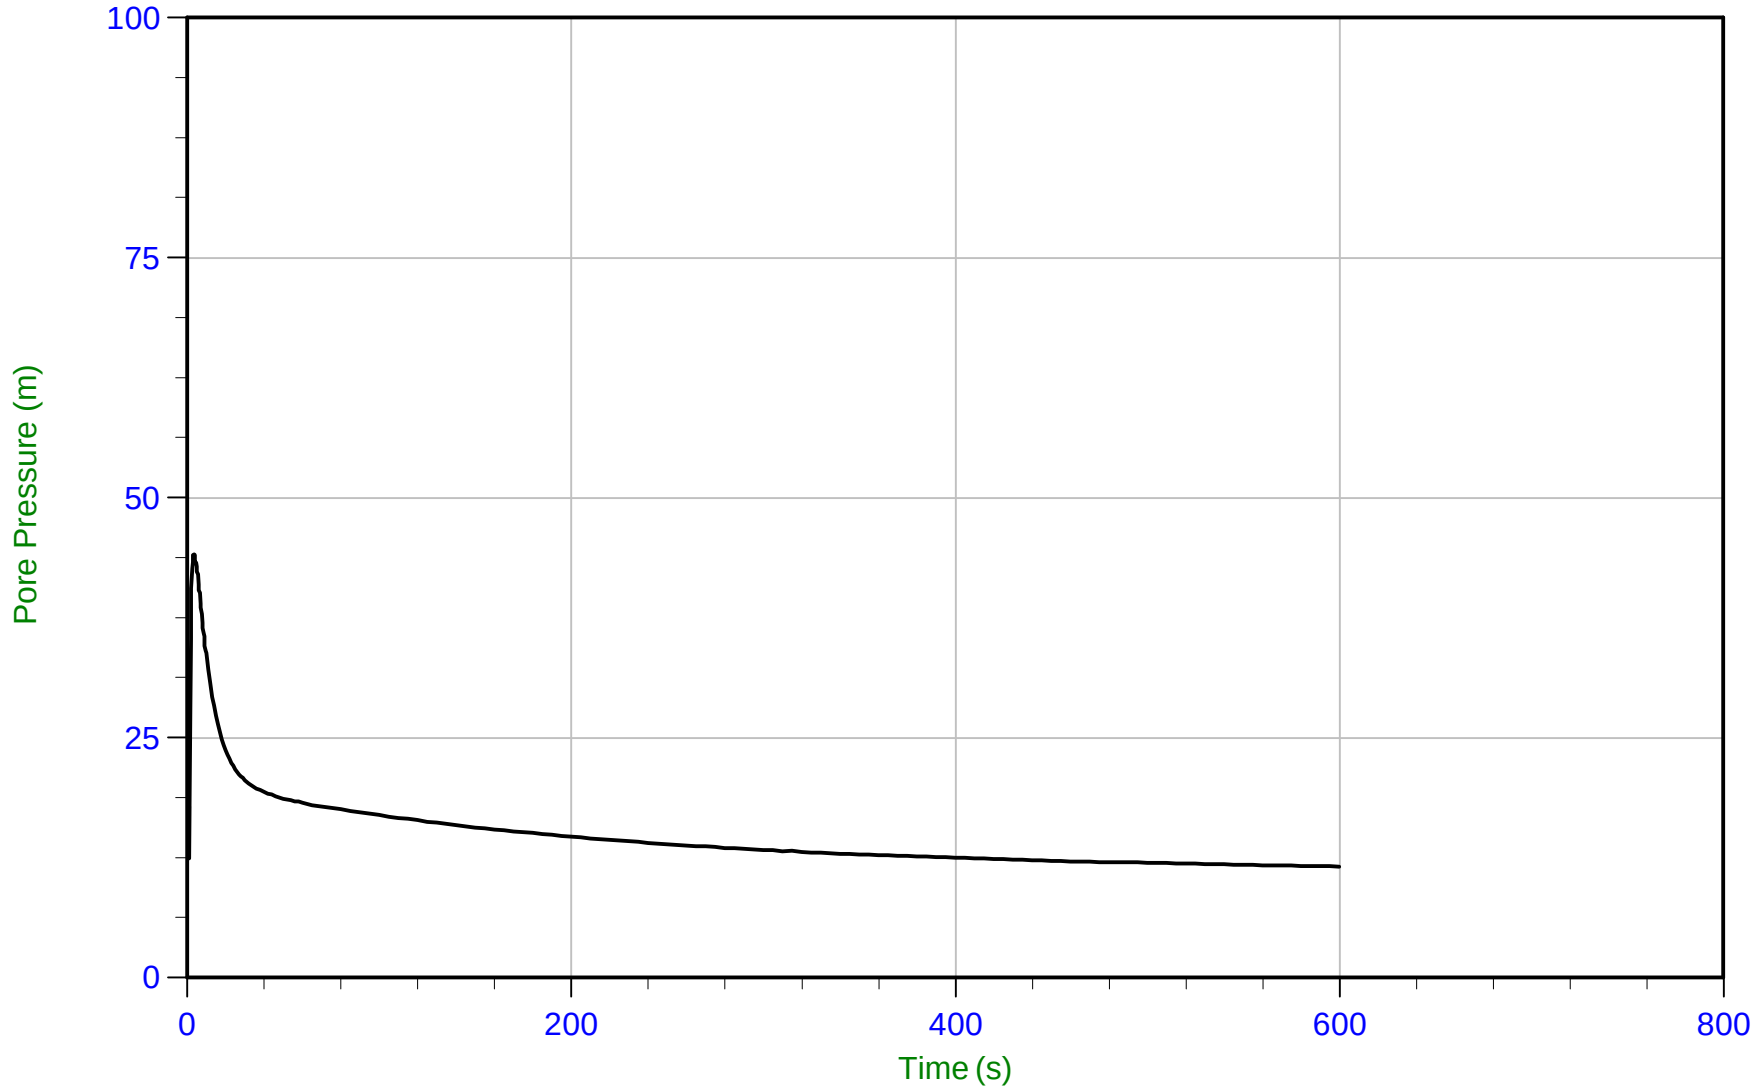

Trace Summary:

Filename: 22-02-23796_RS22-22CPT106.PPF
Depth: 3.800 m / 12.467 ft
Duration: 600.0 s


u Min: 11.6 m
u Max: 44.1 m
u Final: 11.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 11:32
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT106
Cone: 651:T1500F15U35 Area=15 cm²

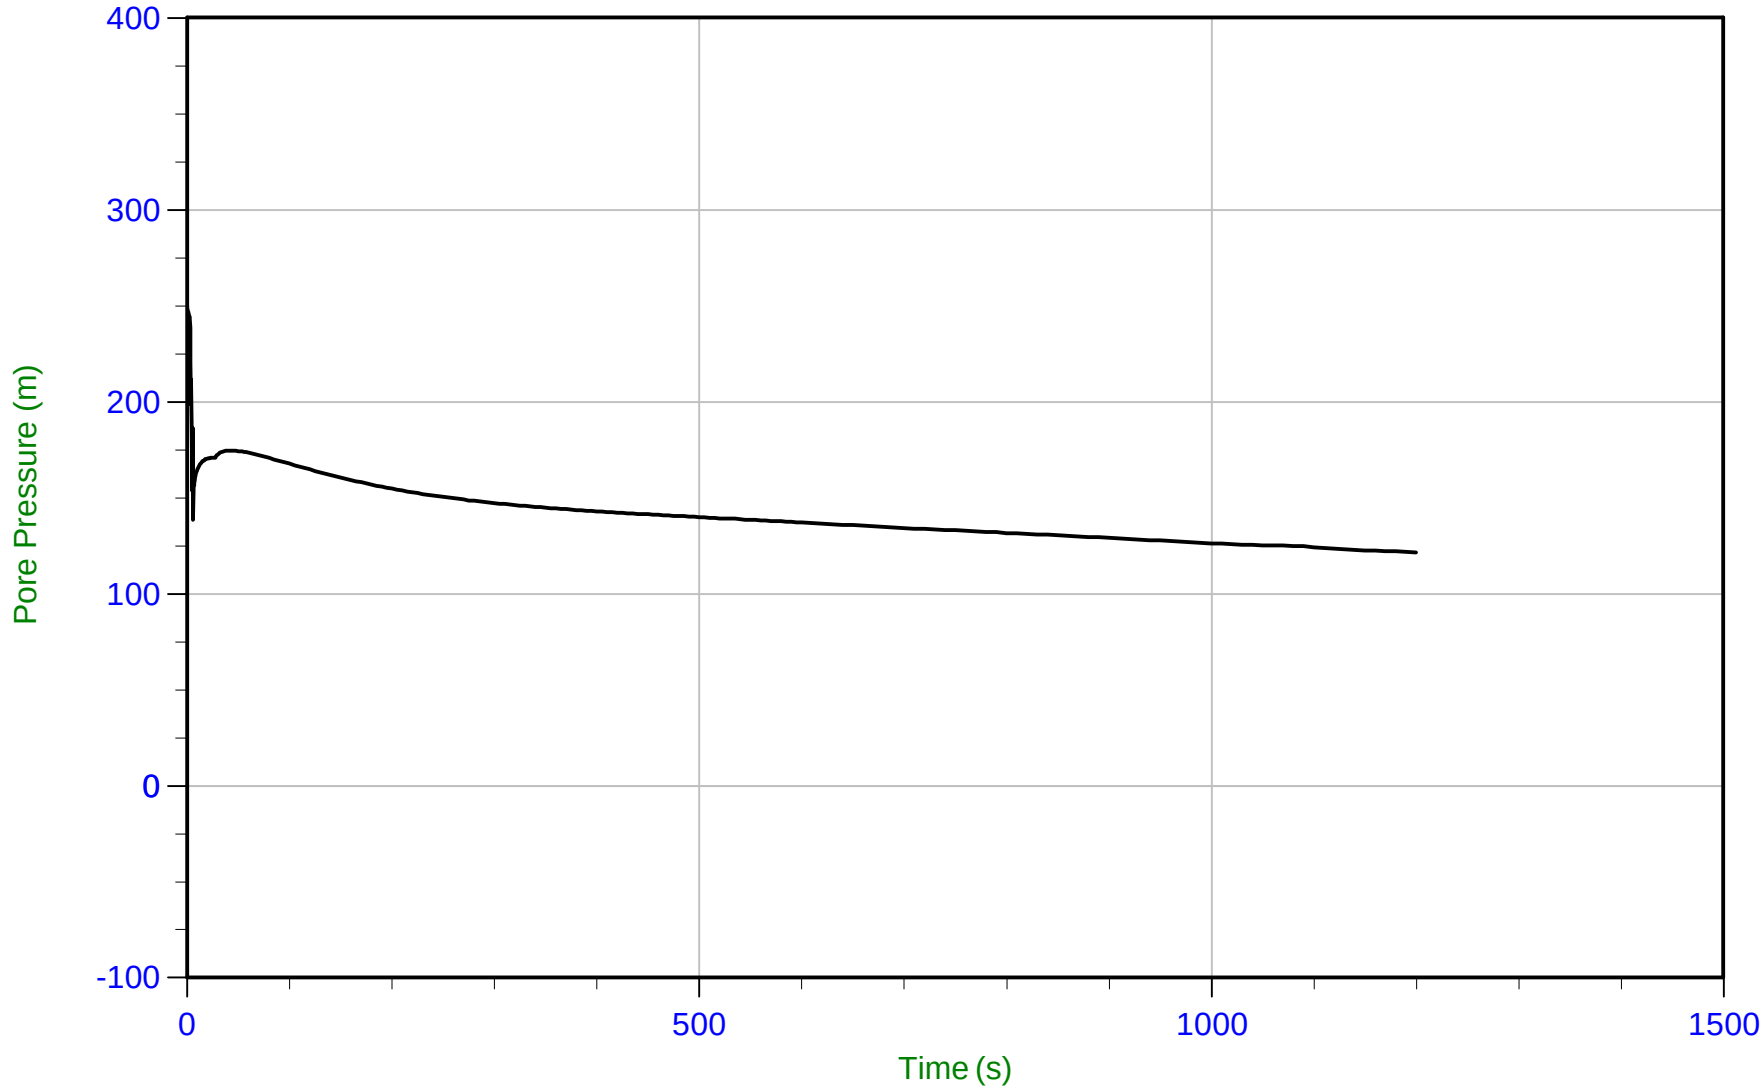

Trace Summary:

Filename: 22-02-23796_RS22-22CPT106.PPF
Depth: 7.000 m / 22.966 ft
Duration: 1200.0 s


u Min: 121.6 m
u Max: 249.7 m
u Final: 121.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 12:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT107
Cone: 651:T1500F15U35 Area=15 cm²

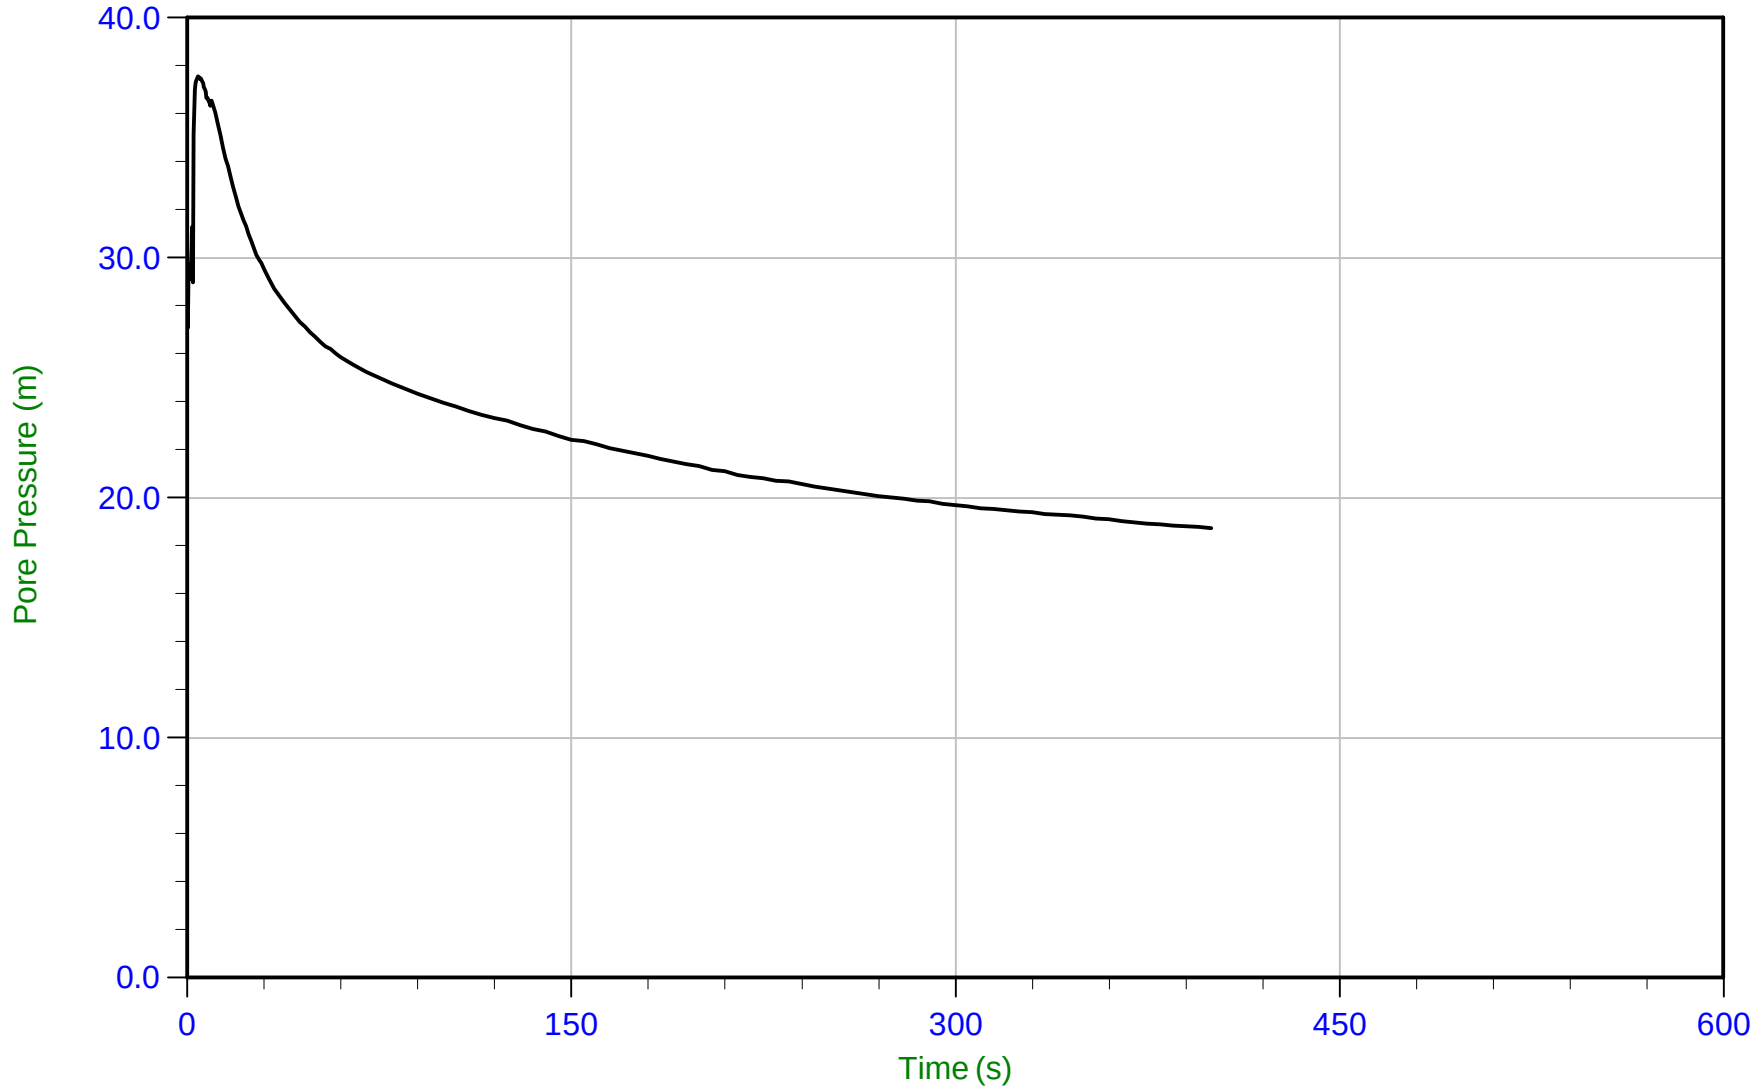

Trace Summary:

Filename: 22-02-23796_RP22-22CPT107.PPF
Depth: 4.925 m / 16.158 ft
Duration: 400.0 s


u Min: 18.7 m
u Max: 37.6 m
u Final: 18.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 14:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT107A
Cone: 750:T1500F15U35 Area=15 cm²

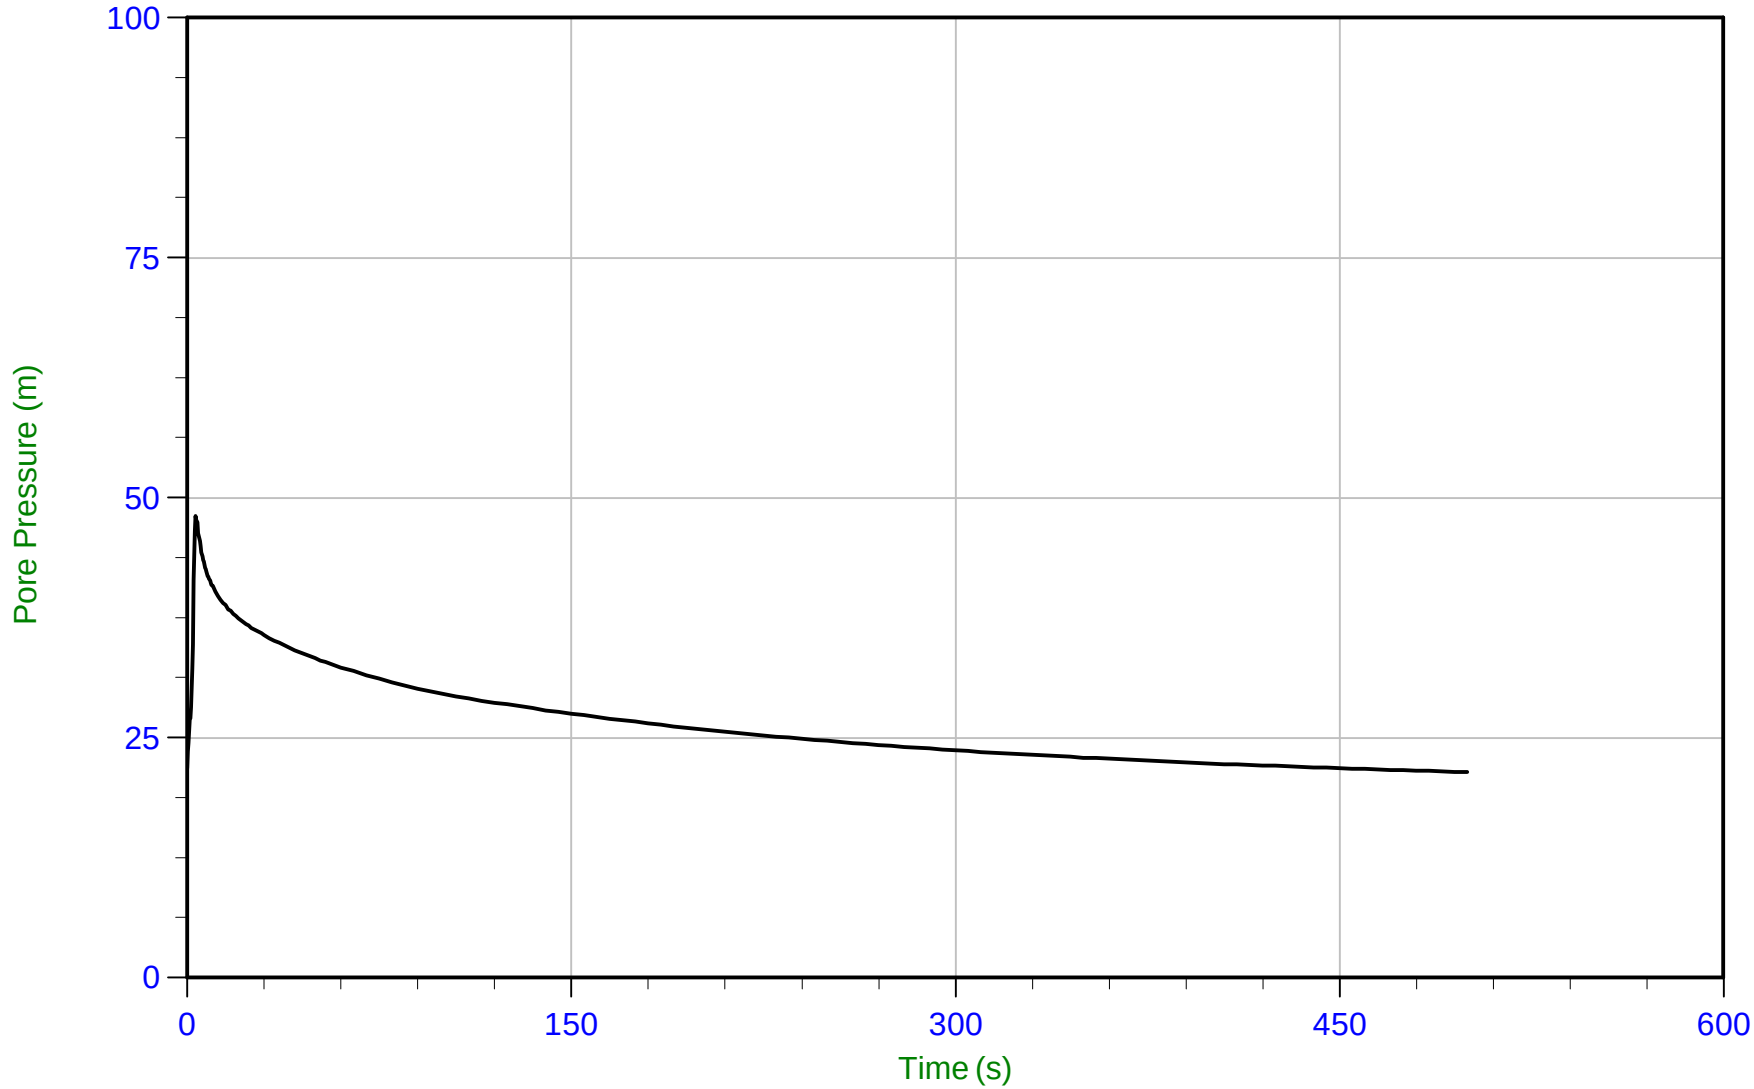

Trace Summary:

Filename: 22-02-23796_RP22-22CPT107A.PPF
Depth: 4.900 m / 16.076 ft
Duration: 500.0 s


u Min: 21.4 m
u Max: 48.1 m
u Final: 21.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 14:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT107A
Cone: 750:T1500F15U35 Area=15 cm²

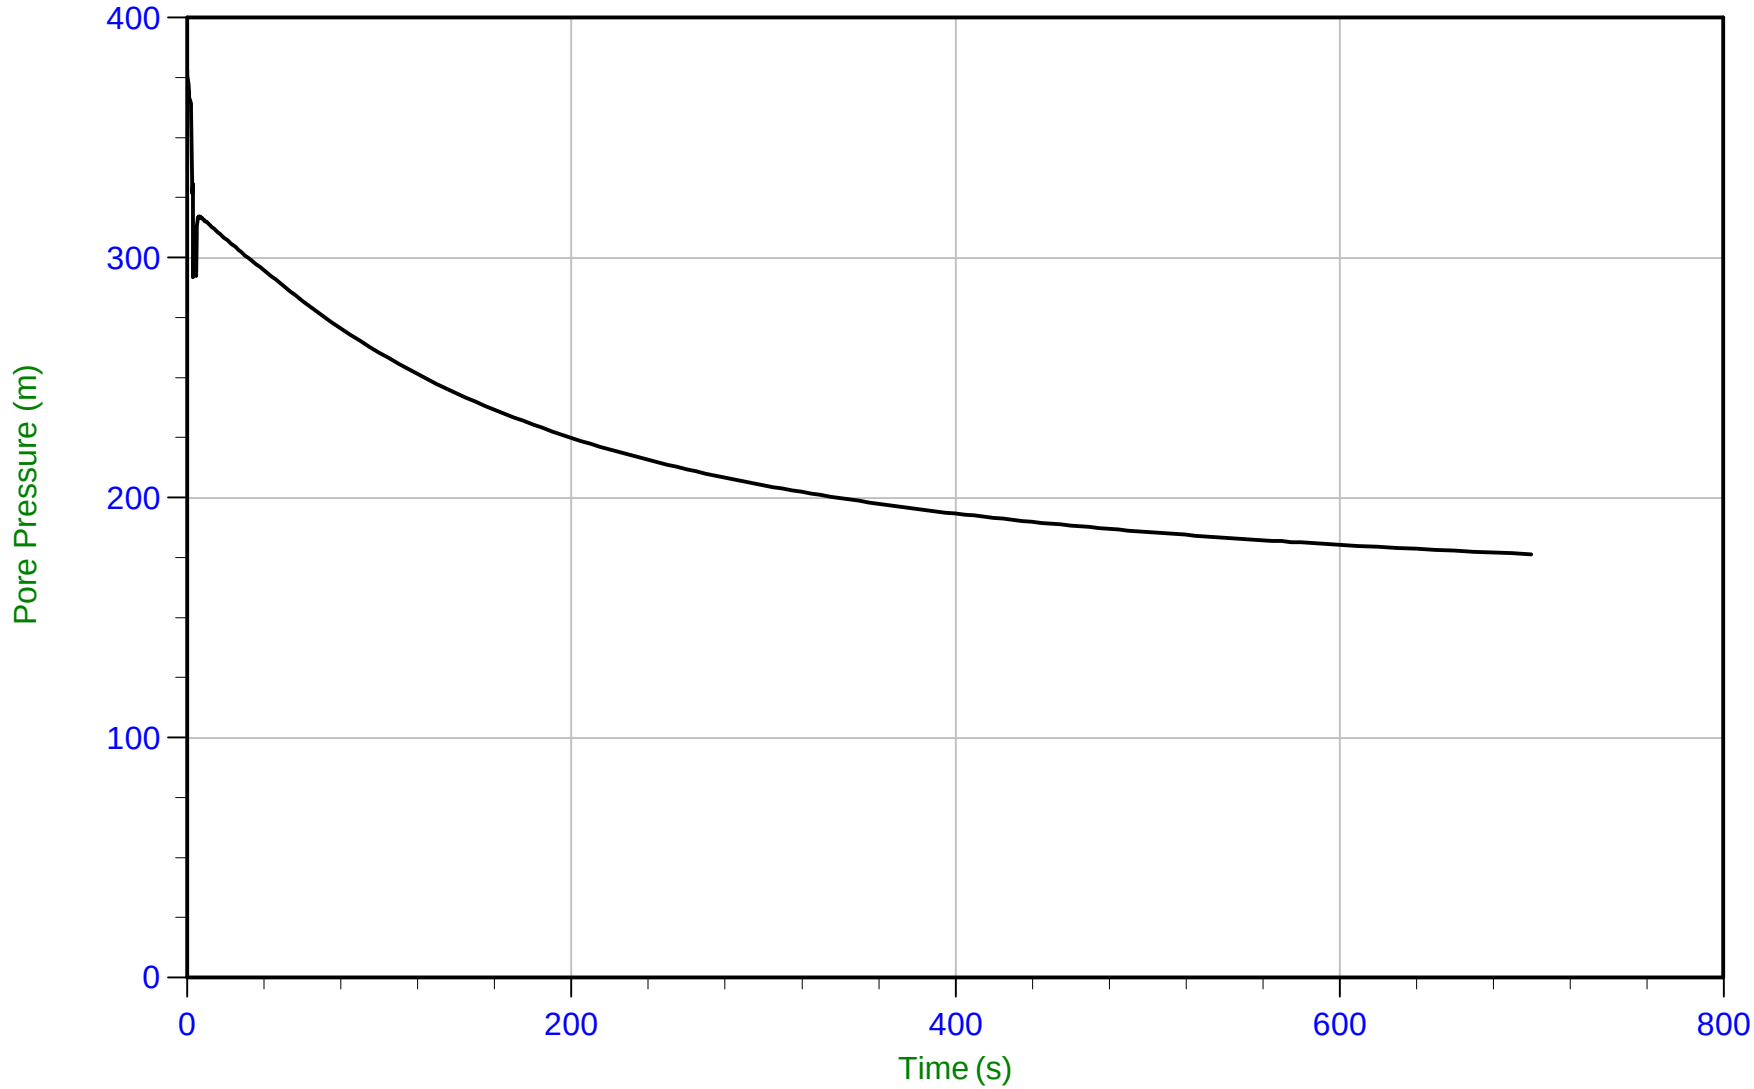

Trace Summary:

Filename: 22-02-23796_RP22-22CPT107A.PPF
Depth: 8.225 m / 26.985 ft
Duration: 700.0 s


u Min: 176.4 m
u Max: 378.3 m
u Final: 176.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 16:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT108
Cone: 750:T1500F15U35 Area=15 cm²

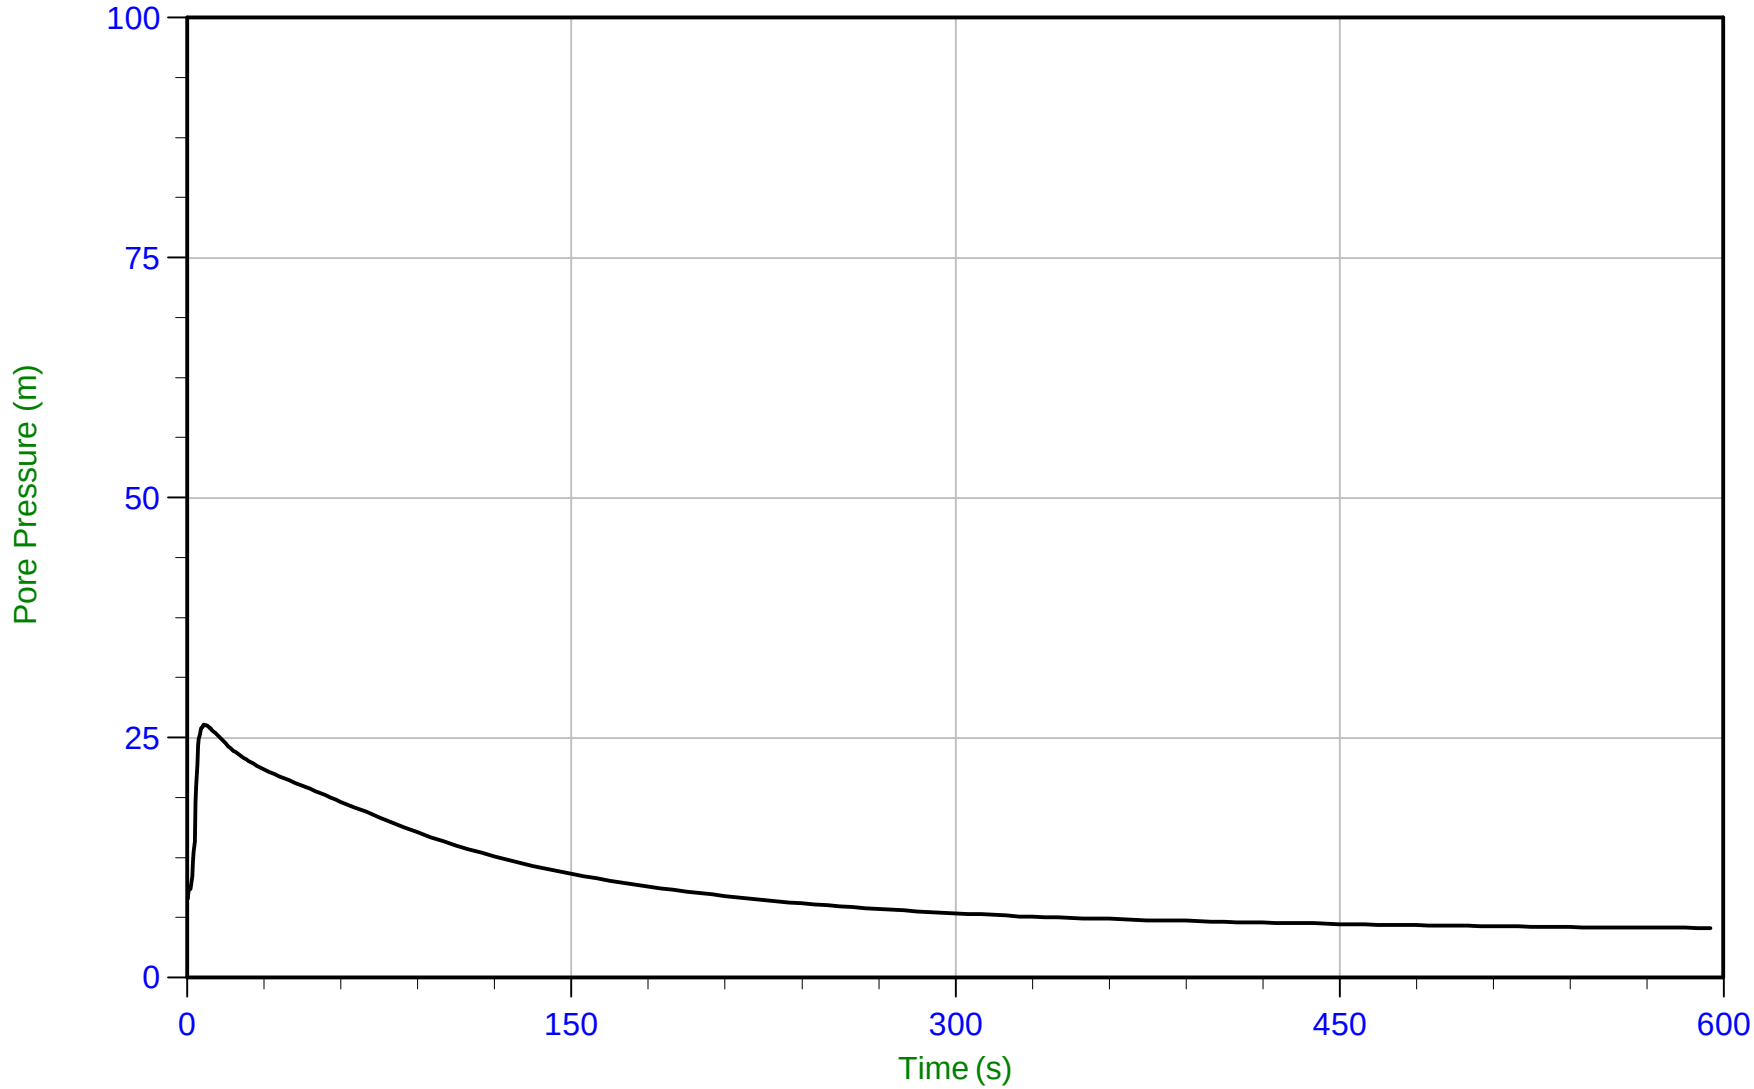

Trace Summary:

Filename: 22-02-23796_RP22-22CPT108.PPF
Depth: 5.850 m / 19.193 ft
Duration: 595.0 s


u Min: 5.2 m
u Max: 26.3 m
u Final: 5.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 16:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT108
Cone: 750:T1500F15U35 Area=15 cm²

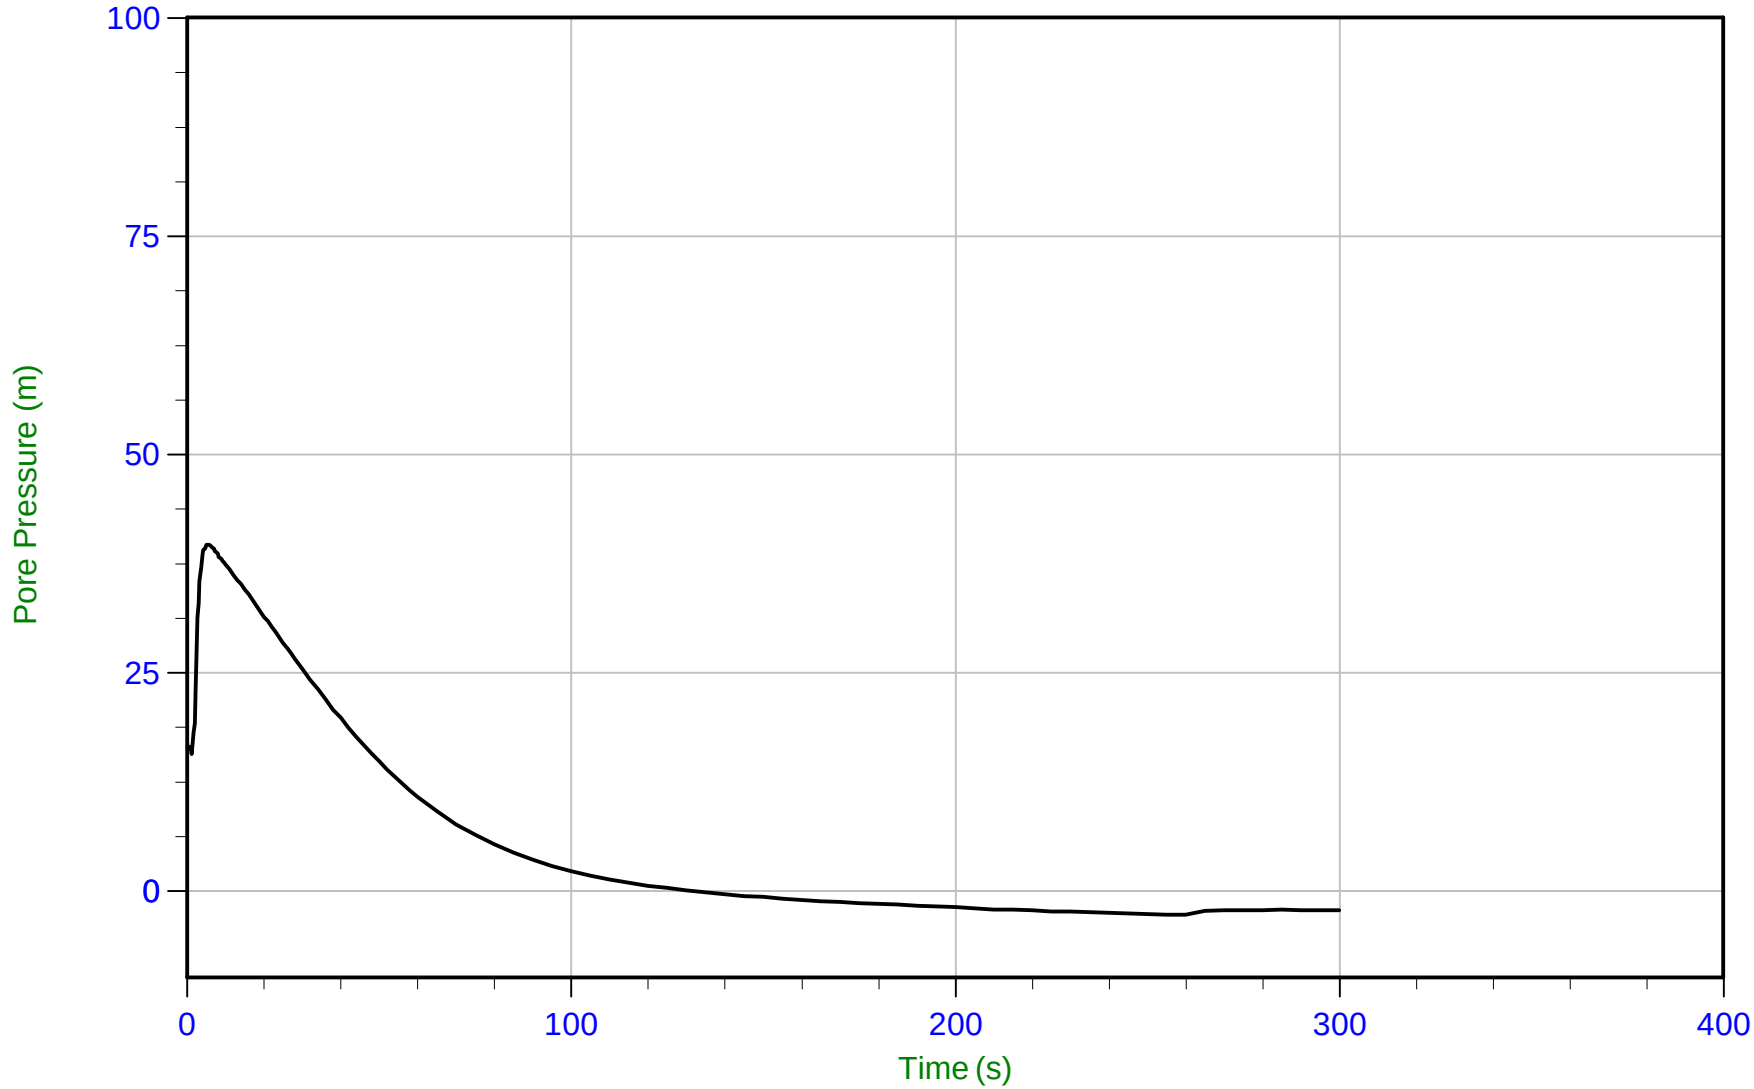

Trace Summary:

Filename: 22-02-23796_RP22-22CPT108.PPF
Depth: 10.050 m / 32.972 ft
Duration: 300.0 s


u Min: -2.8 m
u Max: 39.6 m
u Final: -2.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 08:46
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT109
Cone: 750:T1500F15U35 Area=15 cm²

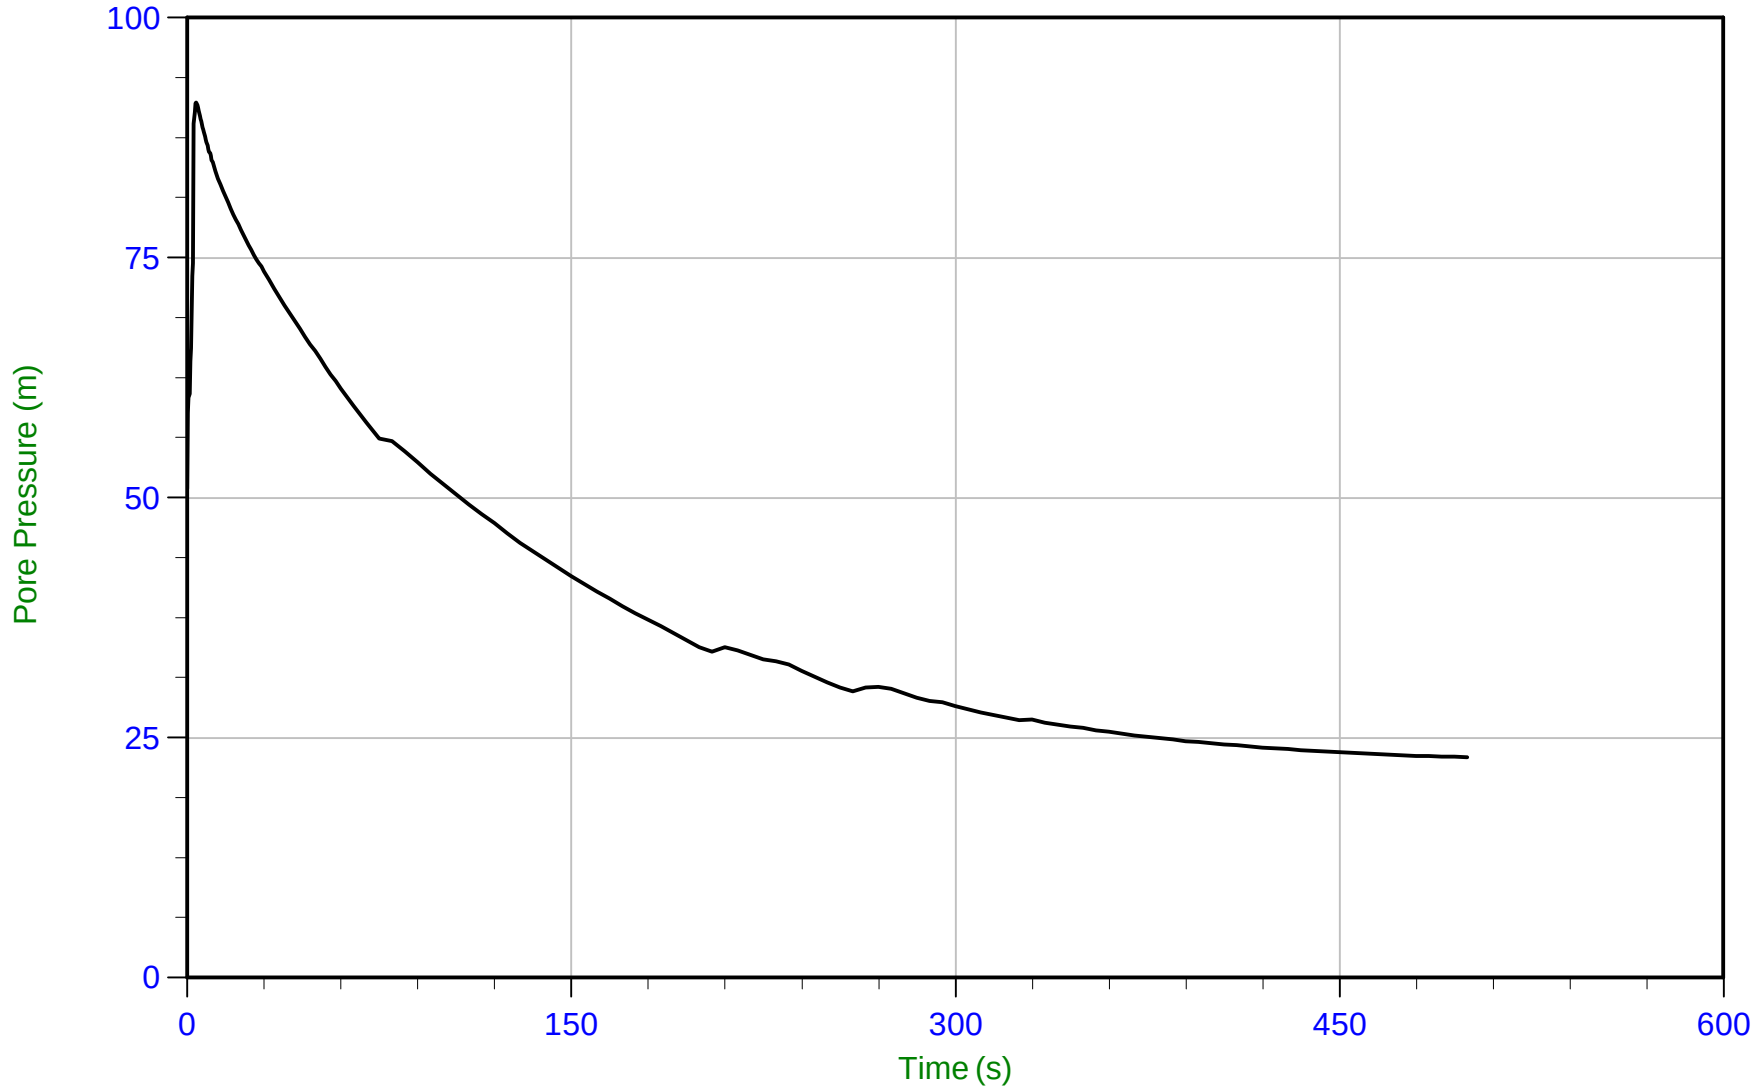

Trace Summary:

Filename: 22-02-23796_RS22-22CPT109.PPF
Depth: 7.775 m / 25.508 ft
Duration: 500.0 s


u Min: 23.0 m
u Max: 91.2 m
u Final: 23.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 17:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT110B
Cone: 750:T1500F15U35 Area=15 cm²

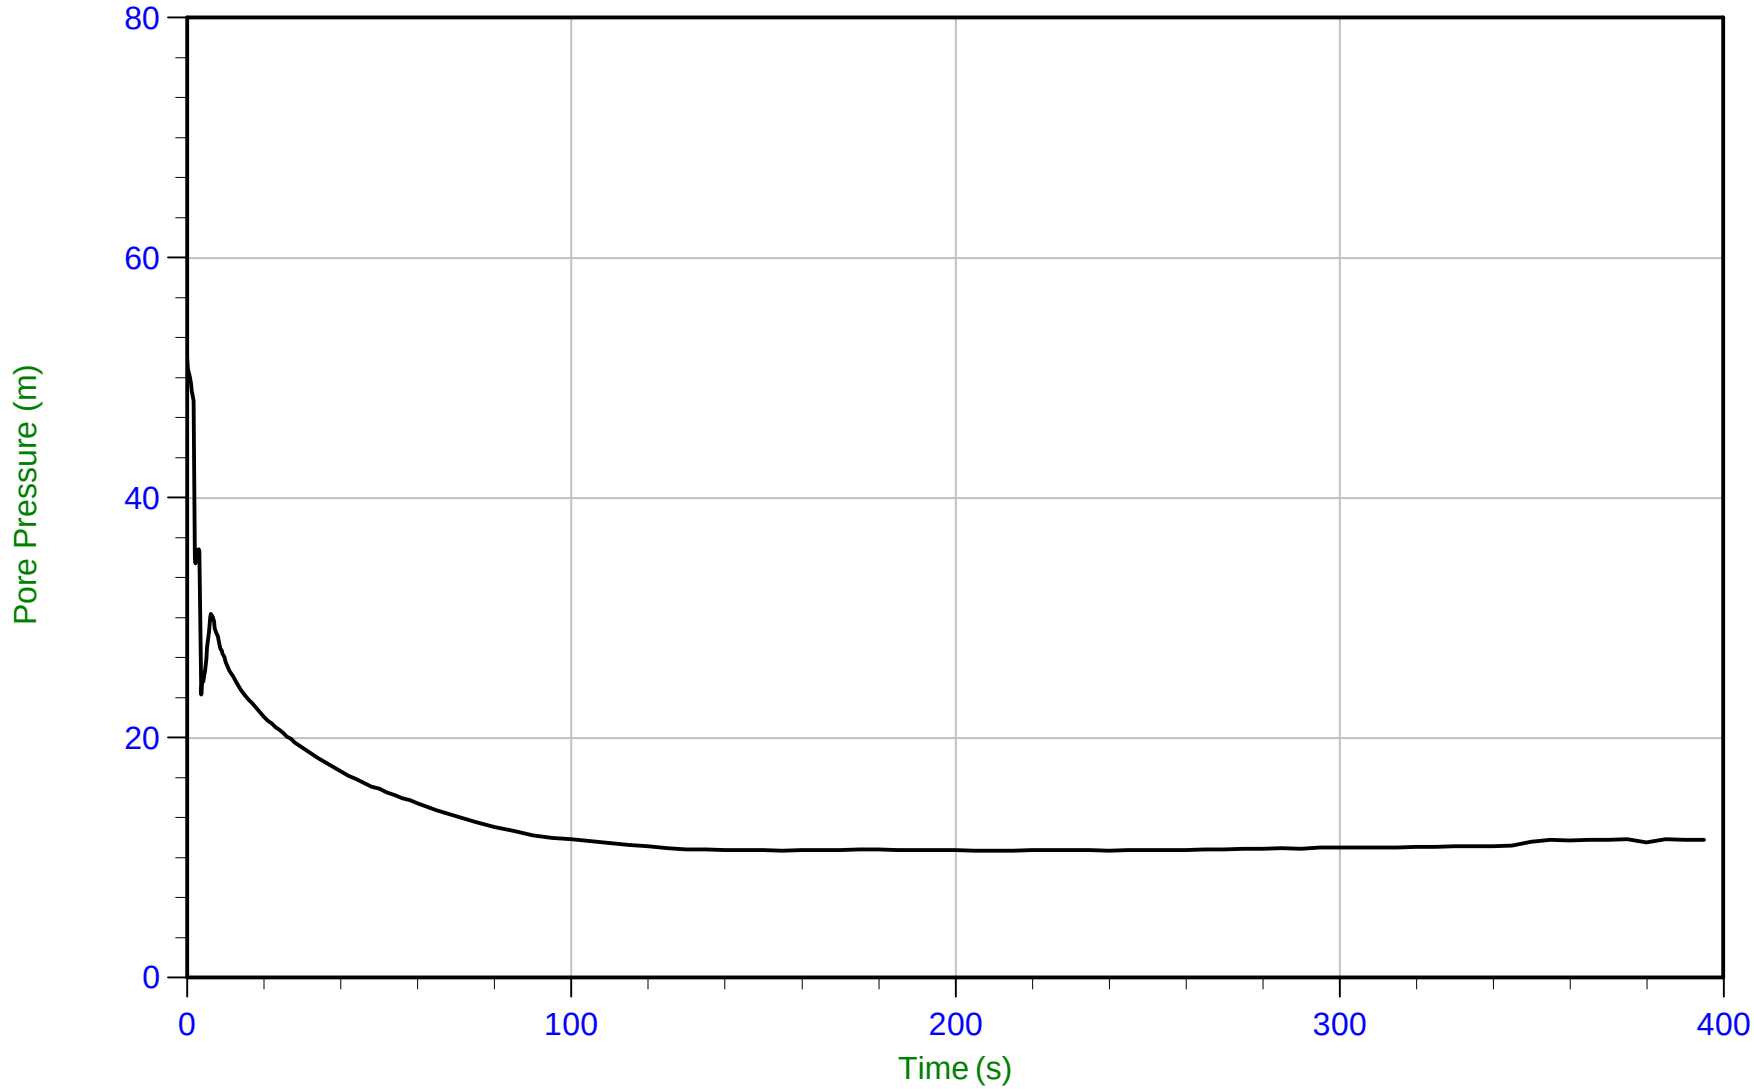

Trace Summary:

Filename: 22-02-23796_RP22-22CPT110B.PPF
Depth: 6.275 m / 20.587 ft
Duration: 395.0 s


u Min: 10.6 m
u Max: 51.6 m
u Final: 11.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 14:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT111
Cone: 750:T1500F15U35 Area=15 cm²

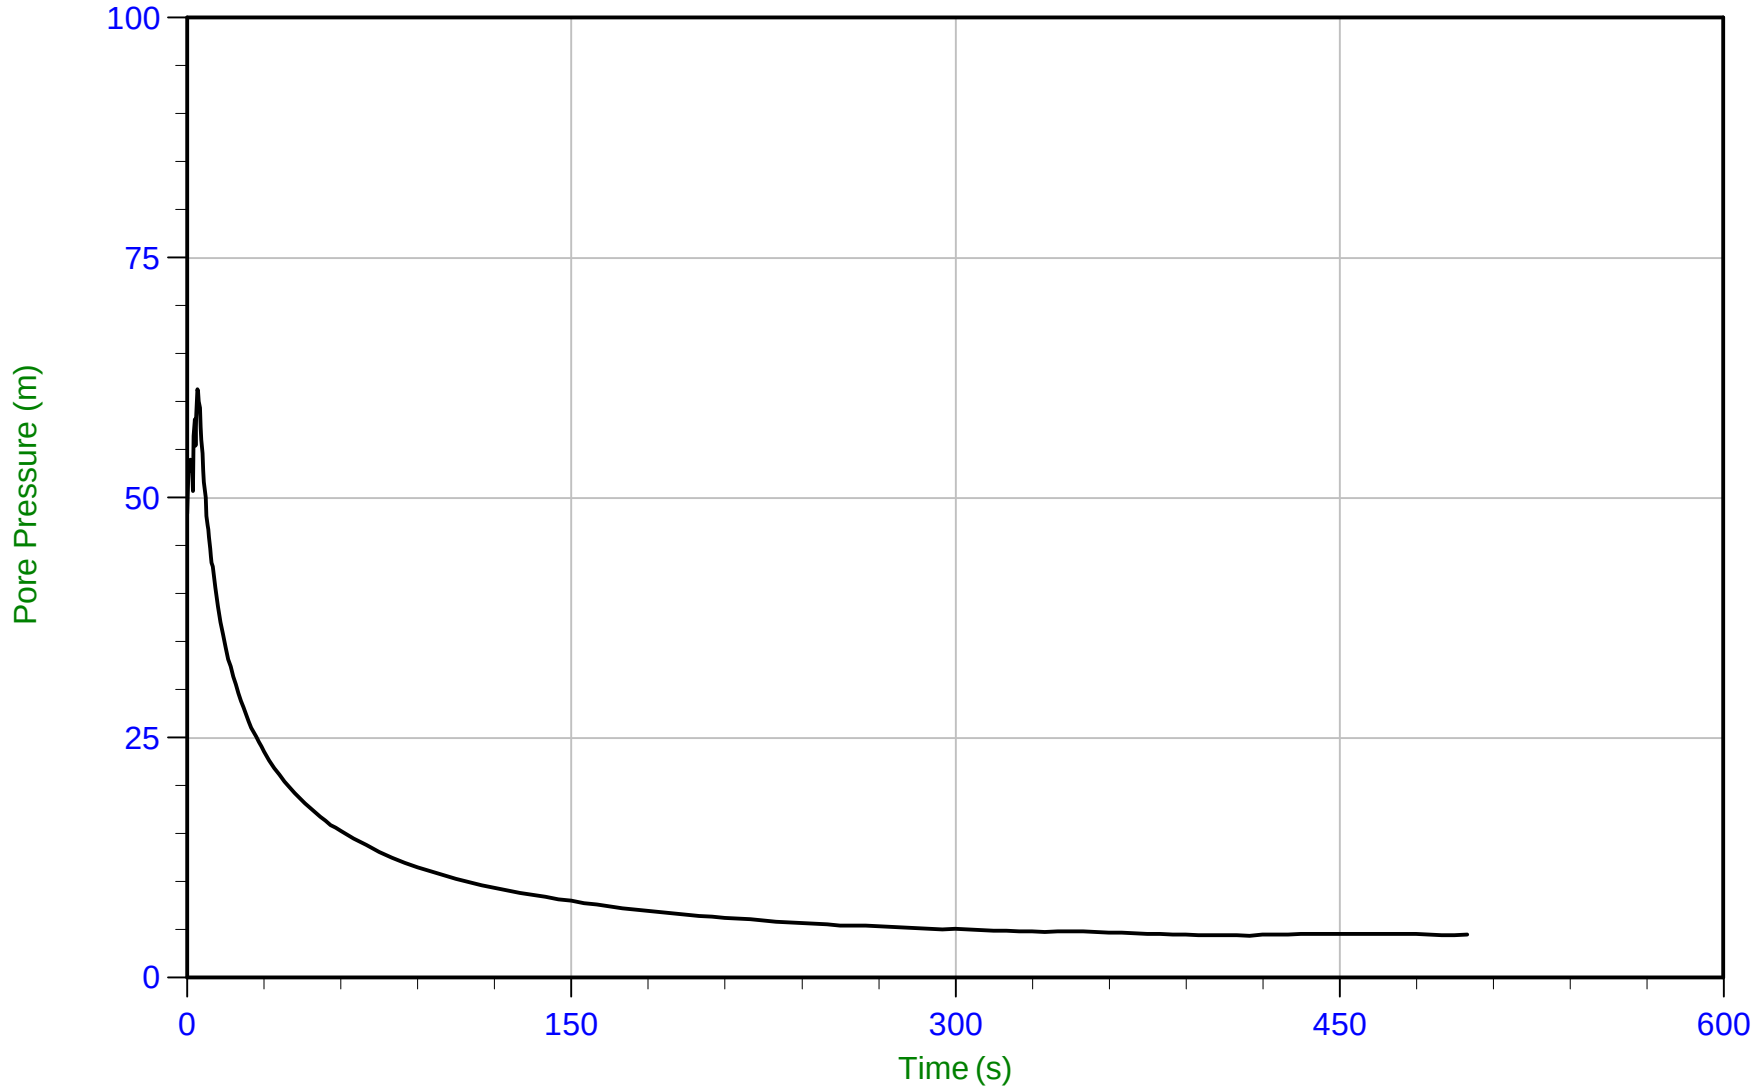

Trace Summary:

Filename: 22-02-23796_RP22-22CPT111.PPF
Depth: 4.875 m / 15.994 ft
Duration: 500.0 s


u Min: 4.4 m
u Max: 61.3 m
u Final: 4.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 14:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT111
Cone: 750:T1500F15U35 Area=15 cm²

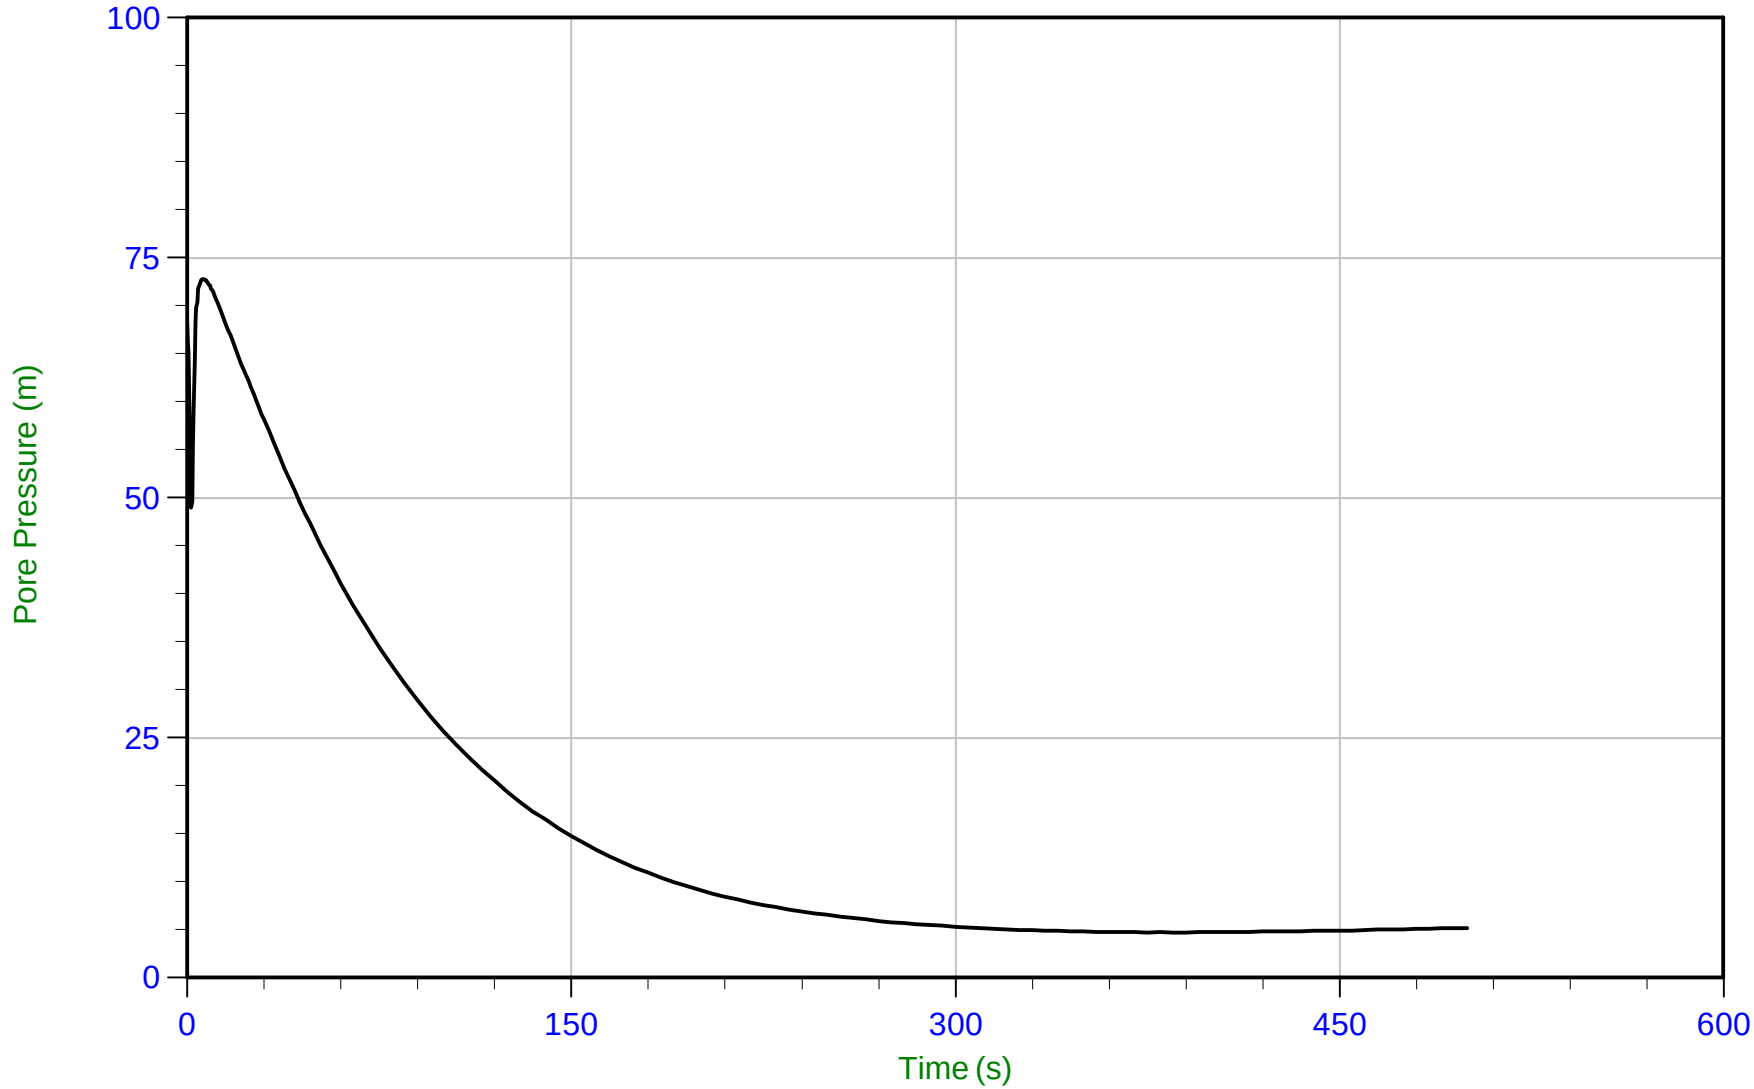

Trace Summary:

Filename: 22-02-23796_RP22-22CPT111.PPF
Depth: 7.700 m / 25.262 ft
Duration: 500.0 s

u Min: 4.7 m
u Max: 72.8 m
u Final: 5.2 m


WT: 2.437 m / 7.995 ft
Ueq: 5.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 11:55
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT112
Cone: 750:T1500F15U35 Area=15 cm²

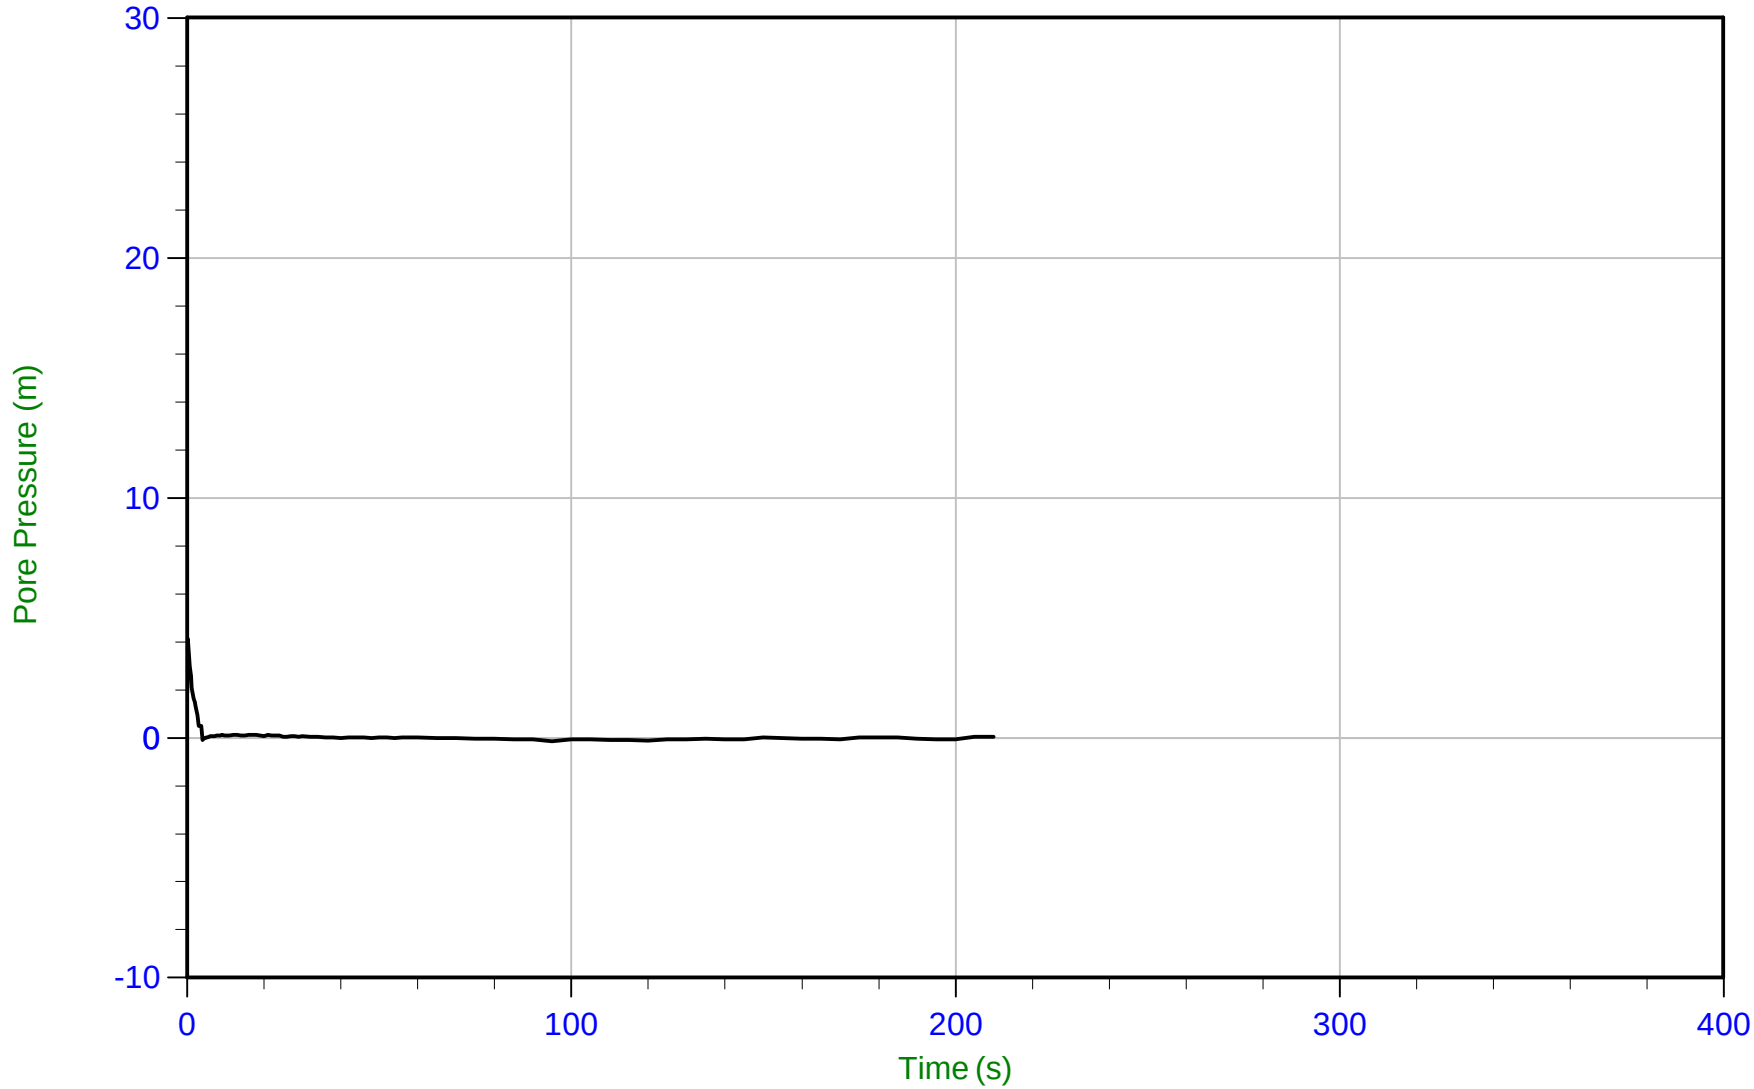

Trace Summary:

Filename: 22-02-23796_RS22-22CPT112.PPF
Depth: 1.775 m / 5.823 ft
Duration: 210.0 s

u Min: -0.1 m
u Max: 4.1 m
u Final: 0.1 m


WT: 1.670 m / 5.479 ft
Ueq: 0.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 11:55
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT112
Cone: 750:T1500F15U35 Area=15 cm²

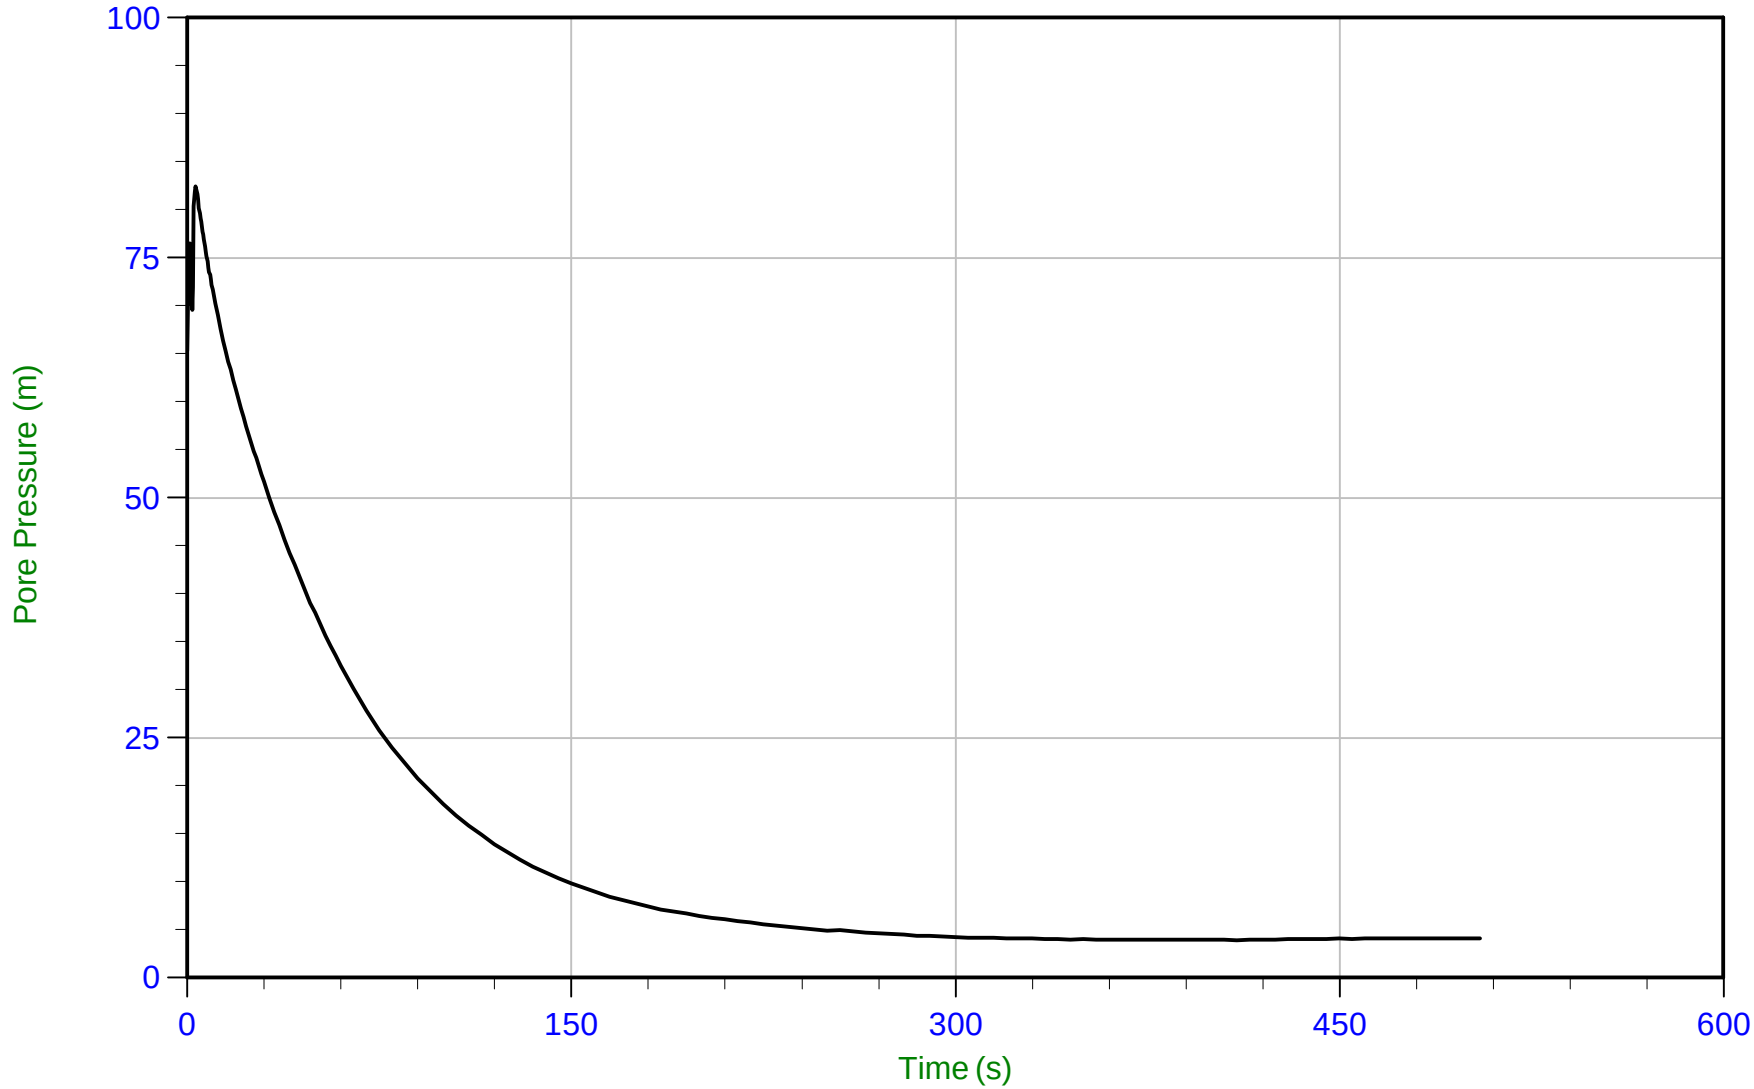

Trace Summary:

Filename: 22-02-23796_RS22-22CPT112.PPF
Depth: 4.775 m / 15.666 ft
Duration: 505.0 s

u Min: 3.9 m
u Max: 82.4 m
u Final: 4.1 m


WT: 0.630 m / 2.067 ft
Ueq: 4.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 11:55
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT112
Cone: 750:T1500F15U35 Area=15 cm²

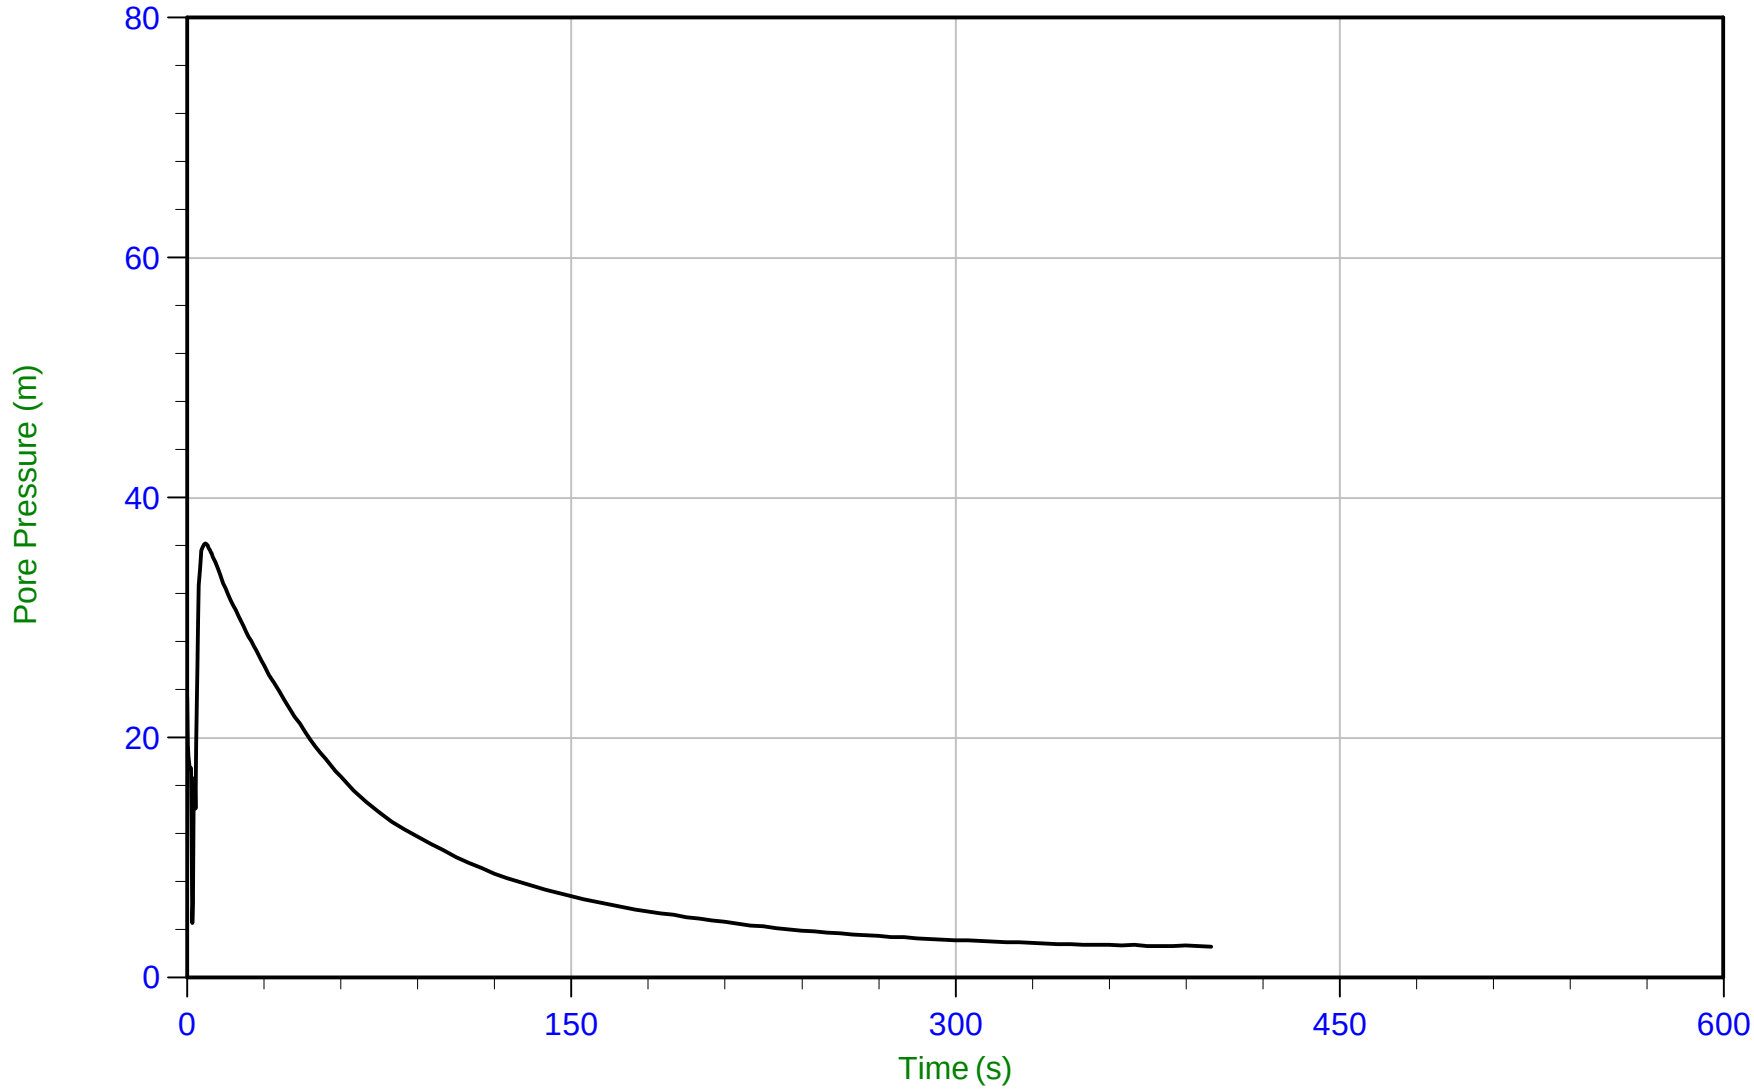

Trace Summary:

Filename: 22-02-23796_RS22-22CPT112.PPF
Depth: 6.500 m / 21.325 ft
Duration: 400.0 s

u Min: 2.6 m
u Max: 36.2 m
u Final: 2.6 m


WT: 3.868 m / 12.690 ft
Ueq: 2.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 08:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT113
Cone: 750:T1500F15U35 Area=15 cm²

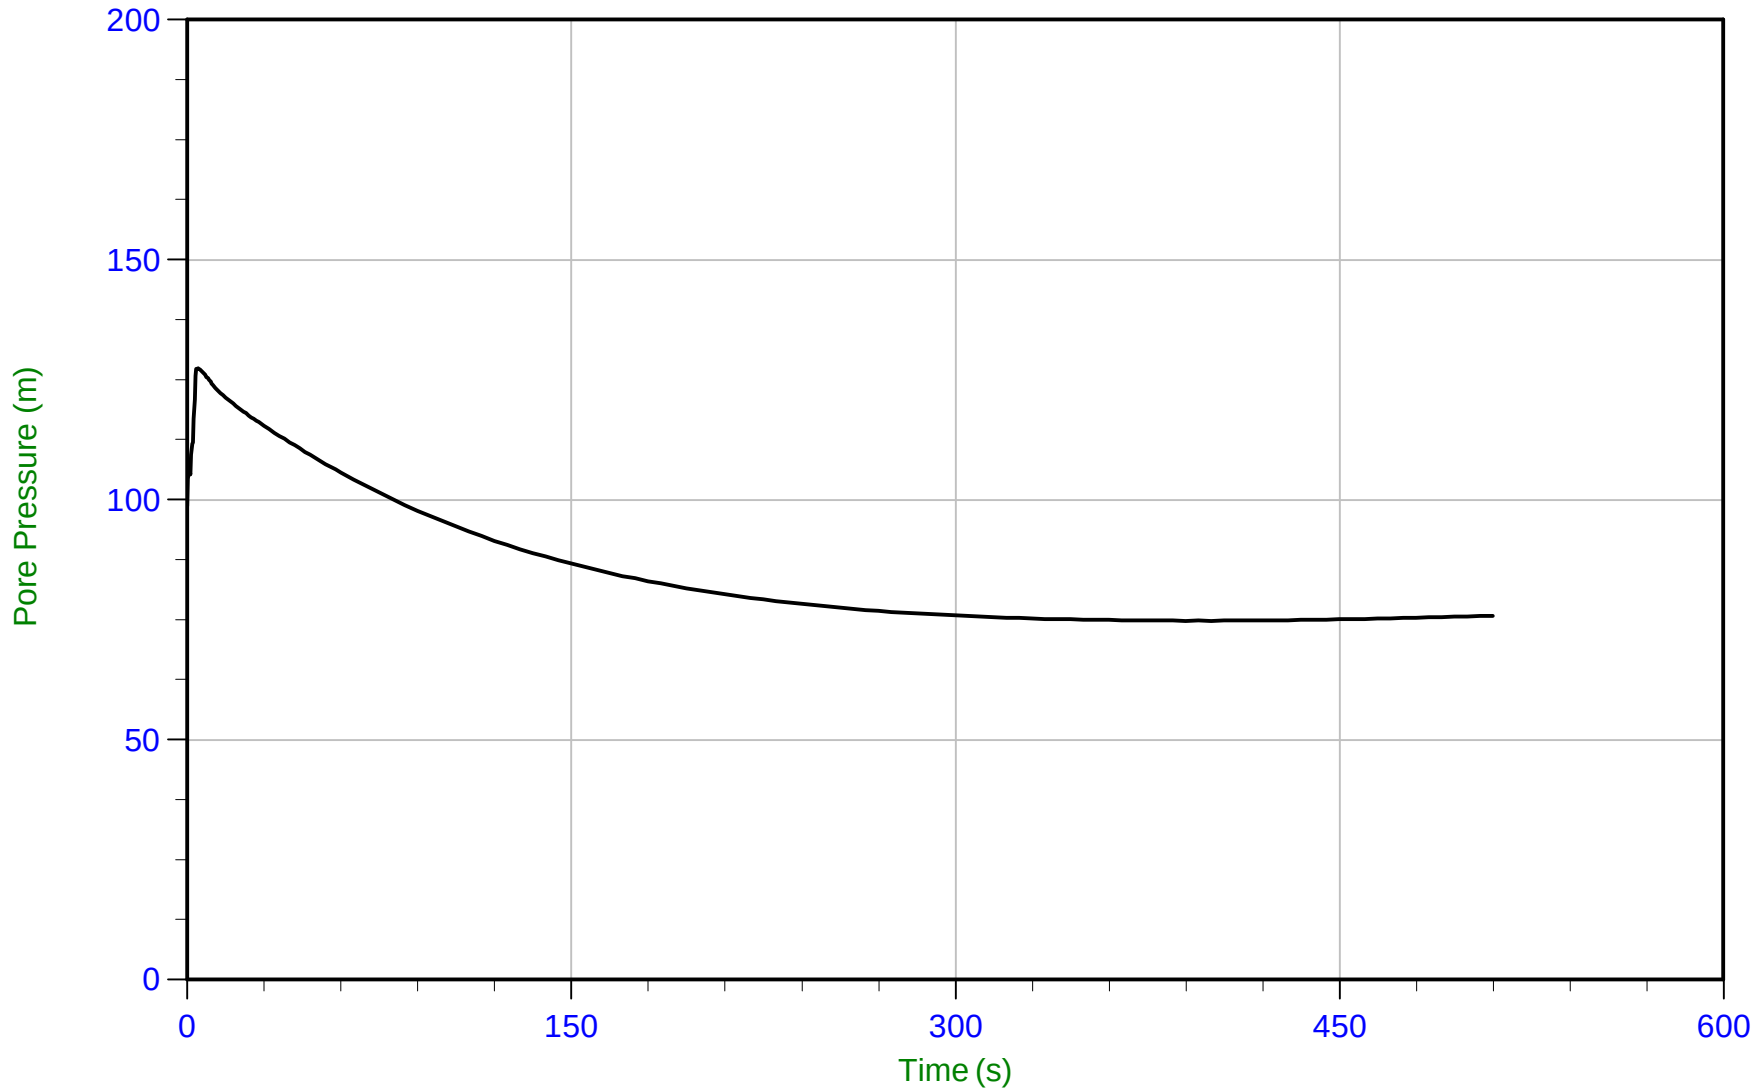

Trace Summary:

Filename: 22-02-23796_RP22-22CPT113.PPF
Depth: 7.775 m / 25.508 ft
Duration: 510.0 s


u Min: 74.8 m
u Max: 127.3 m
u Final: 75.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 08:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT113
Cone: 750:T1500F15U35 Area=15 cm²

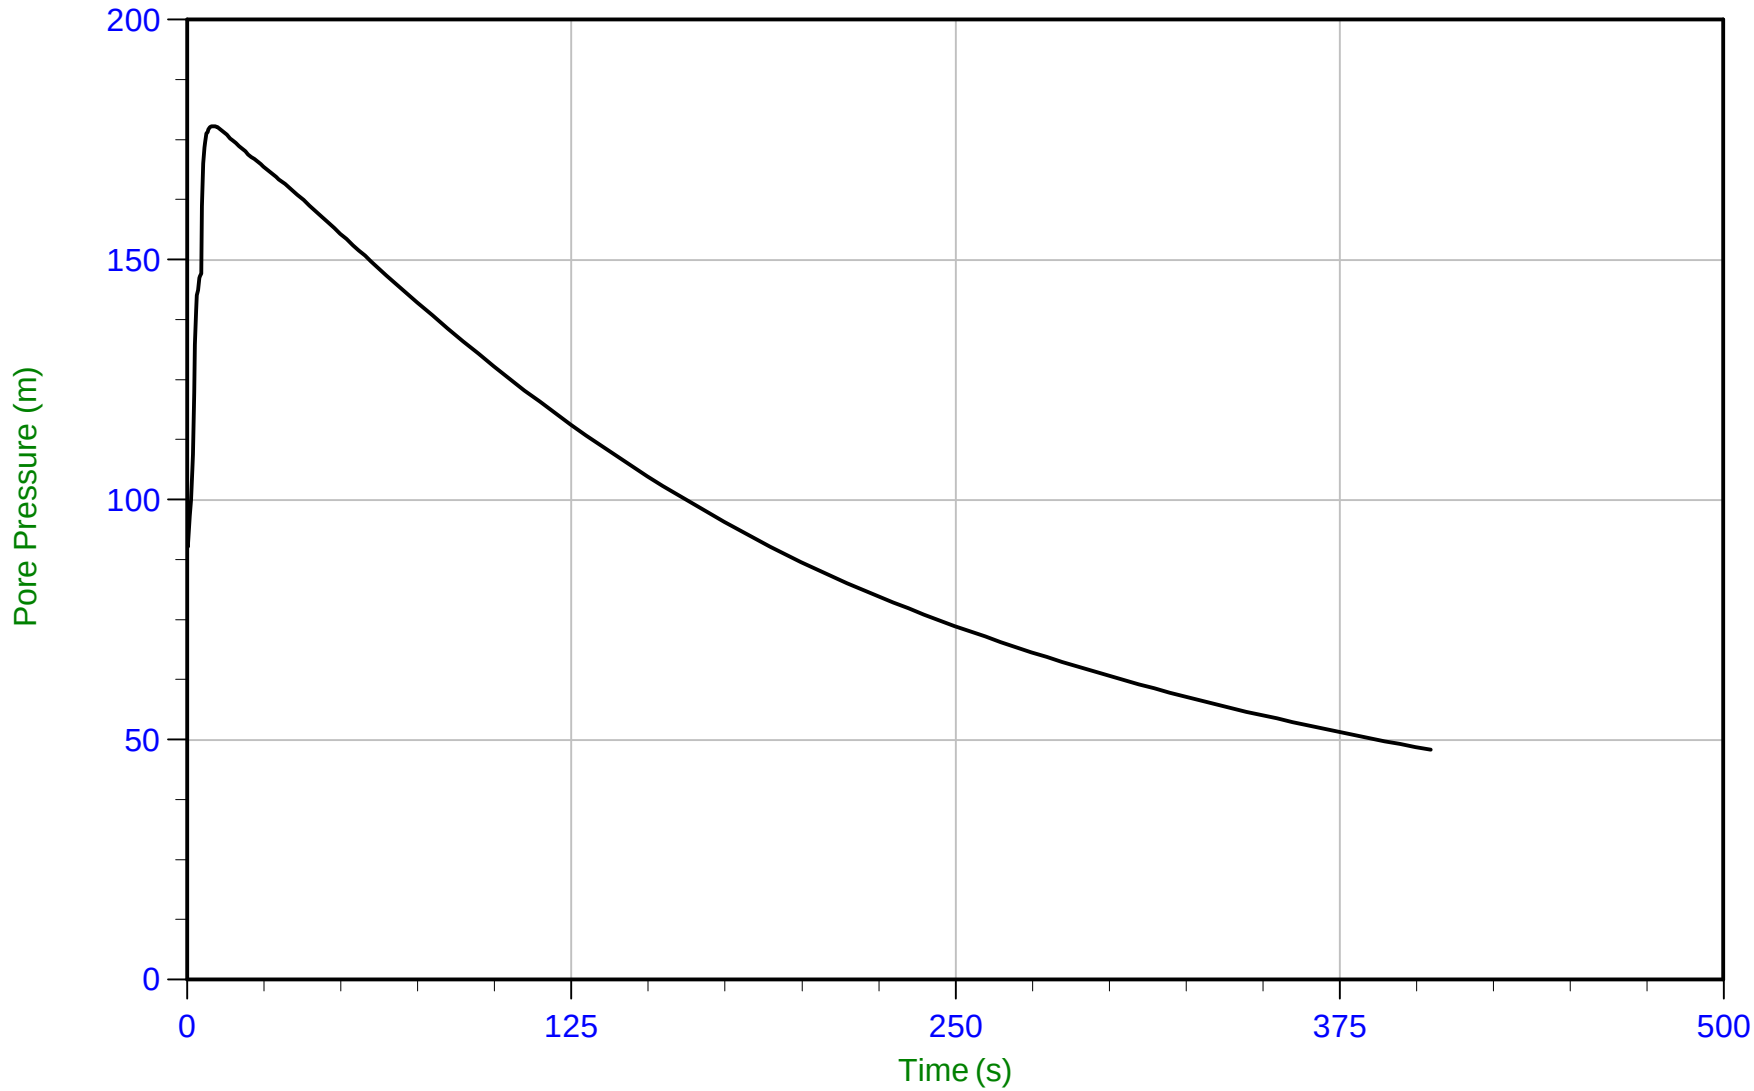

Trace Summary:

Filename: 22-02-23796_RP22-22CPT113.PPF
Depth: 10.775 m / 35.351 ft
Duration: 405.0 s


u Min: 47.9 m
u Max: 177.9 m
u Final: 47.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 08:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT113
Cone: 750:T1500F15U35 Area=15 cm²

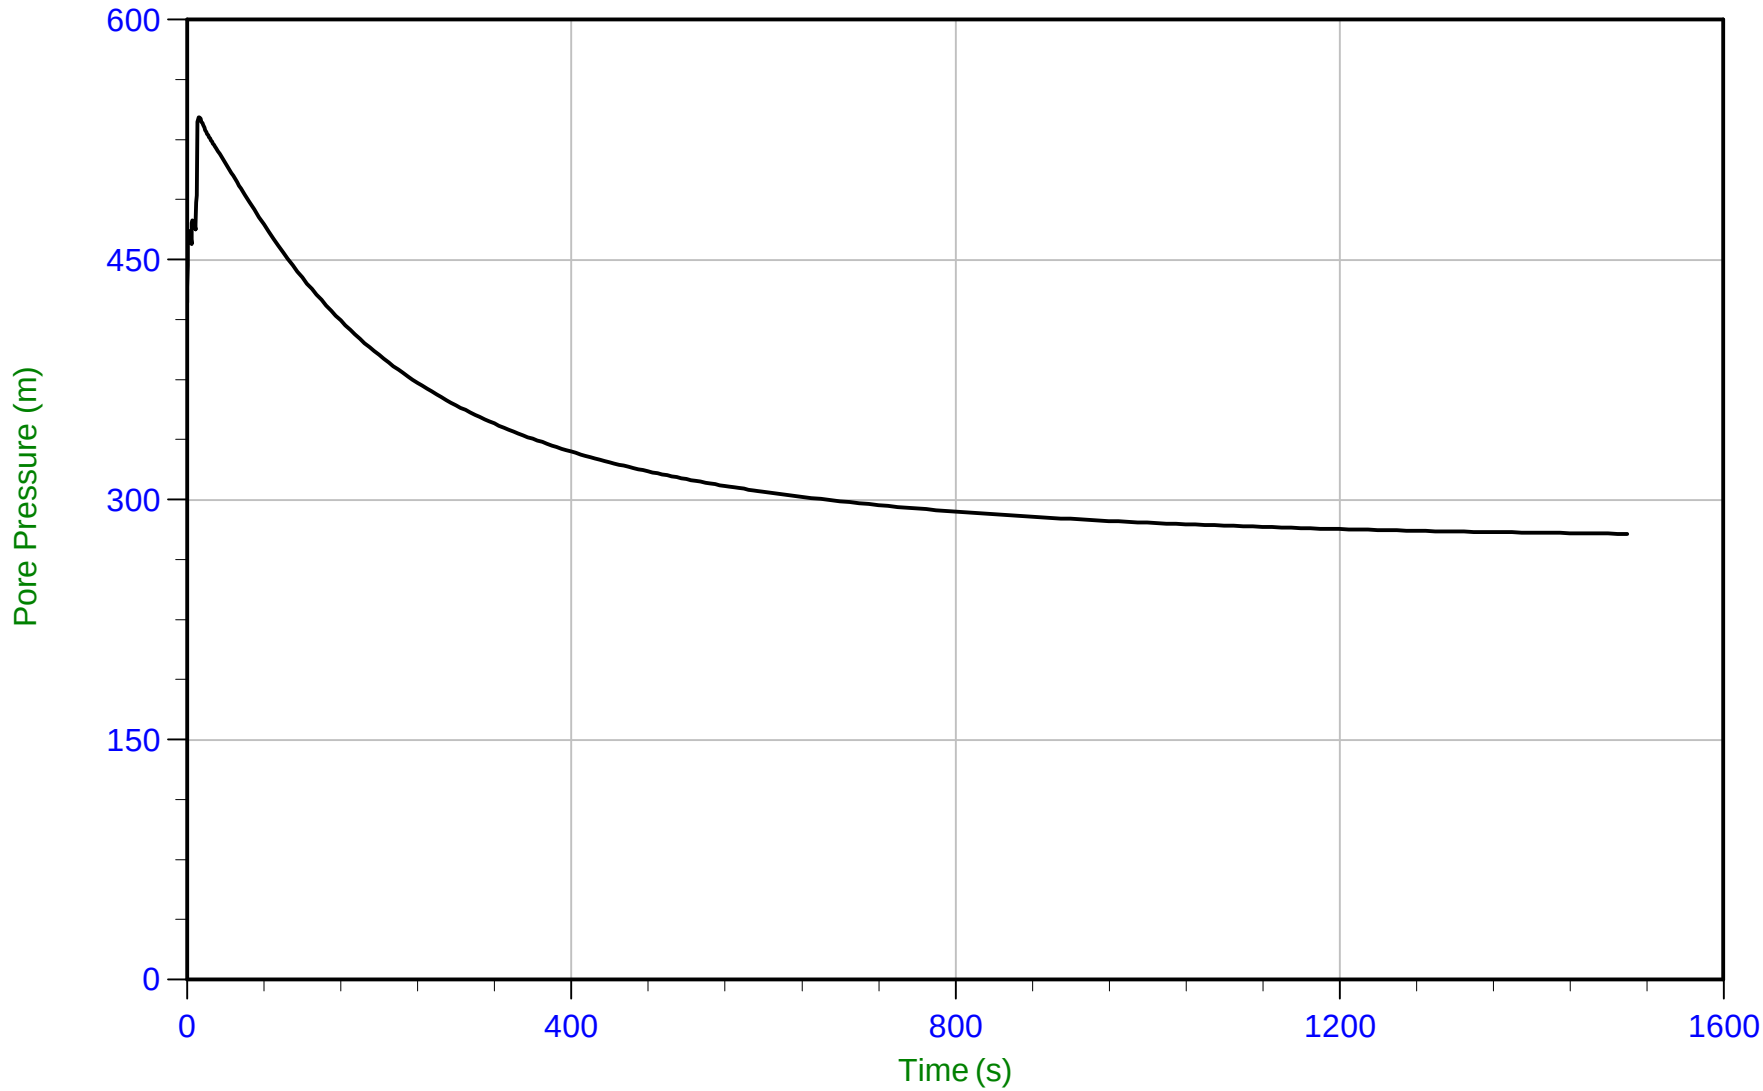

Trace Summary:

Filename: 22-02-23796_RP22-22CPT113.PPF
Depth: 11.925 m / 39.124 ft
Duration: 1500.0 s


u Min: 278.7 m
u Max: 539.1 m
u Final: 278.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 10:49
Site: Brooks, Alberta

Sounding: RCPT22-22CPT114
Cone: 750:T1500F15U35 Area=15 cm²

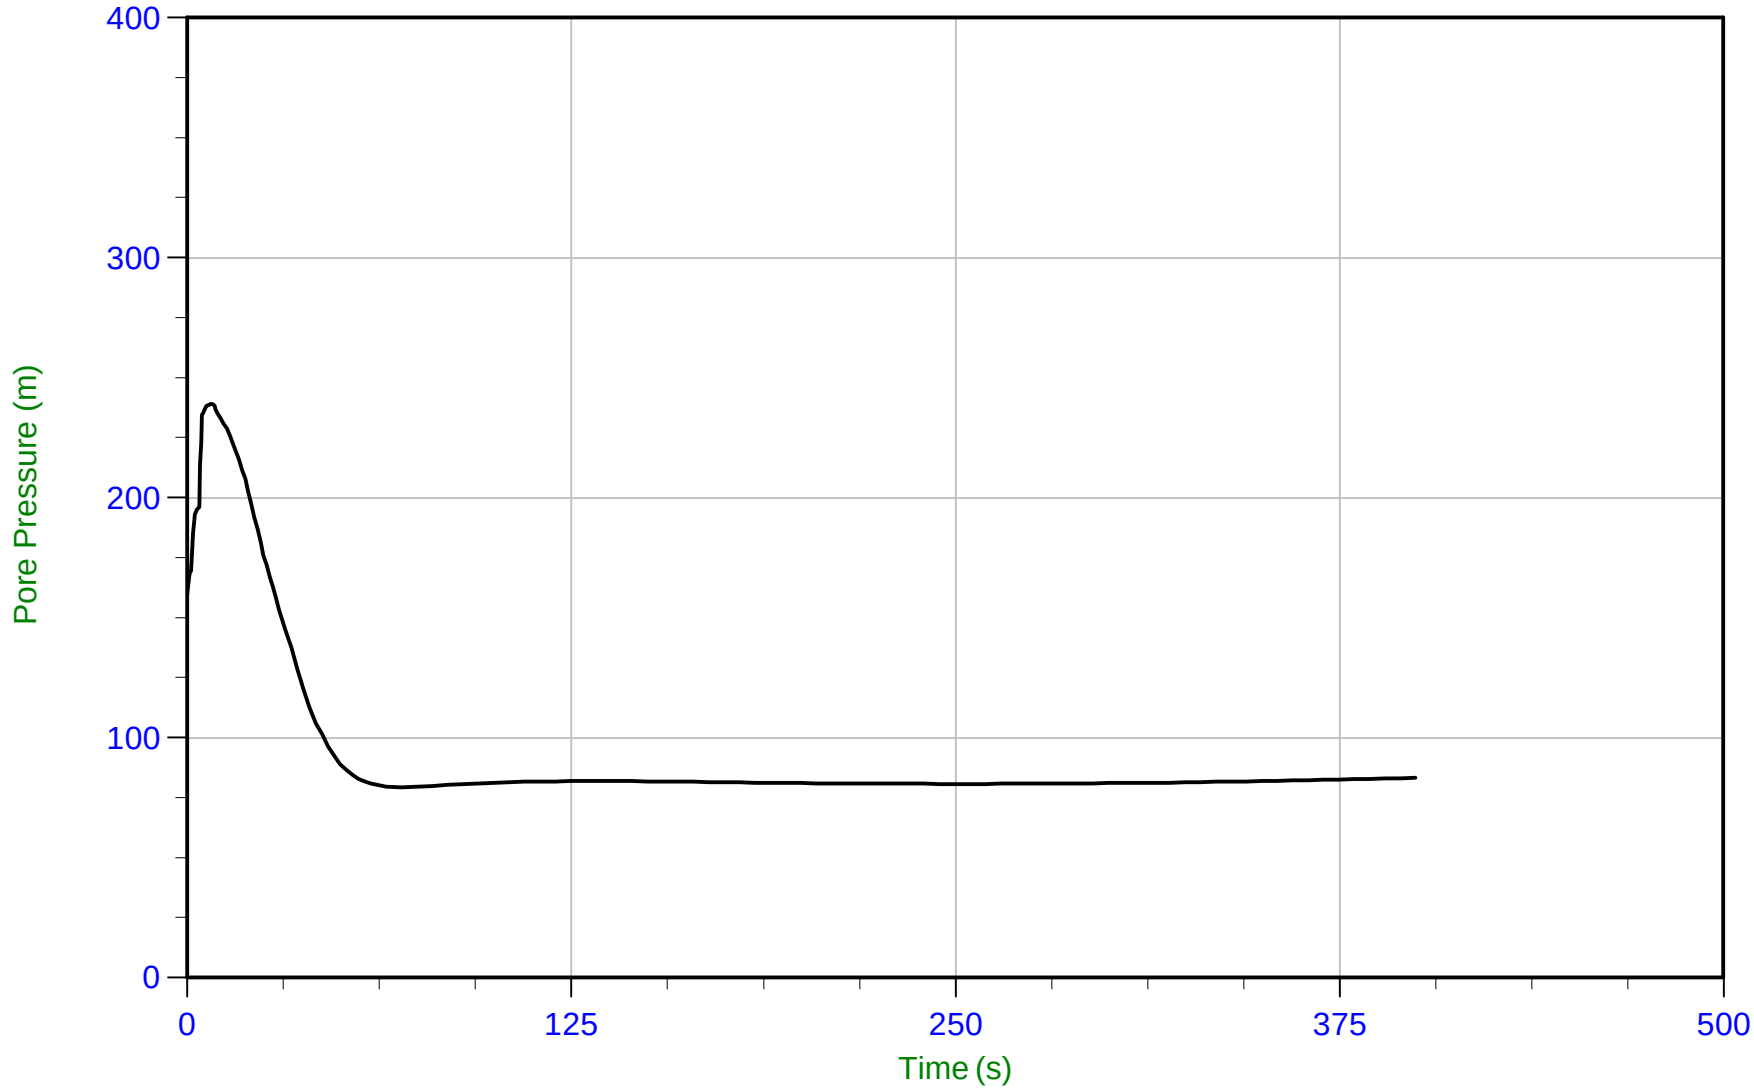

Trace Summary:

Filename: 22-02-23796_RP22-22CPT114.PPF
Depth: 7.875 m / 25.836 ft
Duration: 400.0 s


u Min: 79.4 m
u Max: 239.0 m
u Final: 83.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 10:49
Site: Brooks, Alberta

Sounding: RCPT22-22CPT114
Cone: 750:T1500F15U35 Area=15 cm²

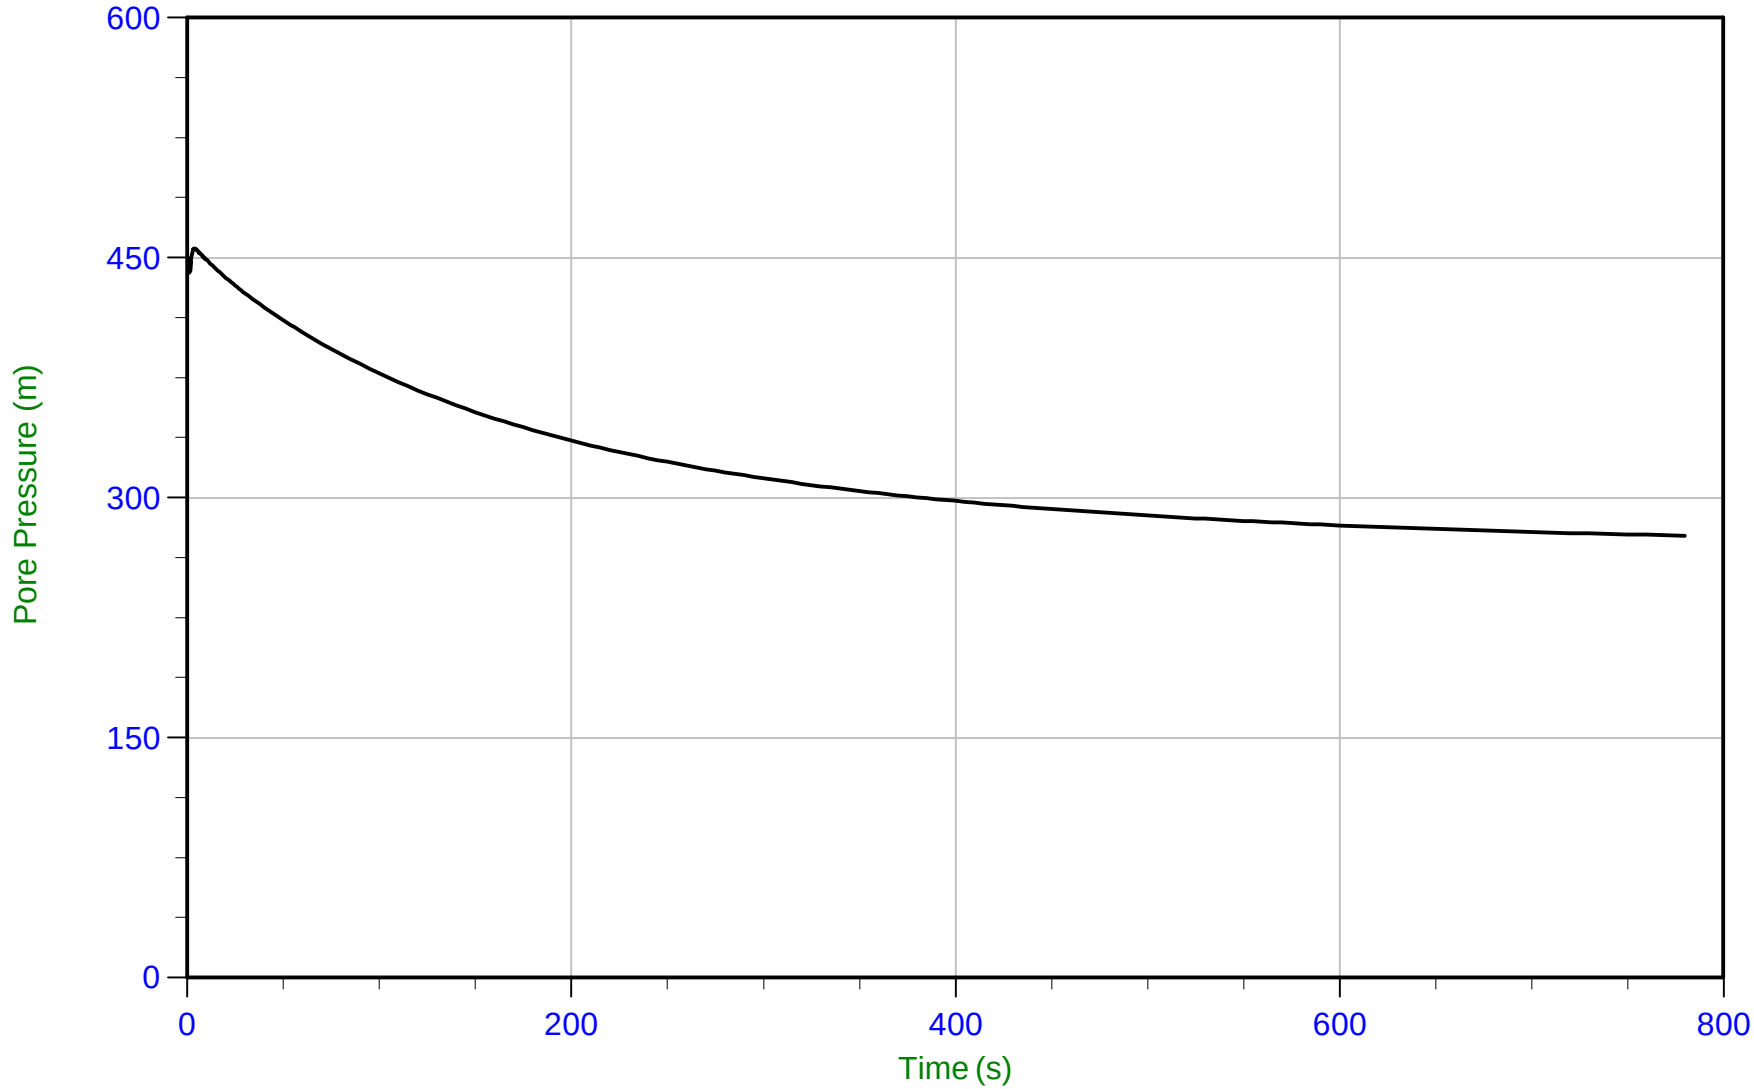

Trace Summary:

Filename: 22-02-23796_RP22-22CPT114.PPF
Depth: 9.850 m / 32.316 ft
Duration: 780.0 s


u Min: 276.3 m
u Max: 455.7 m
u Final: 276.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/15/2022 07:30
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT115
Cone: 822:T1000F10U35 Area=15 cm²

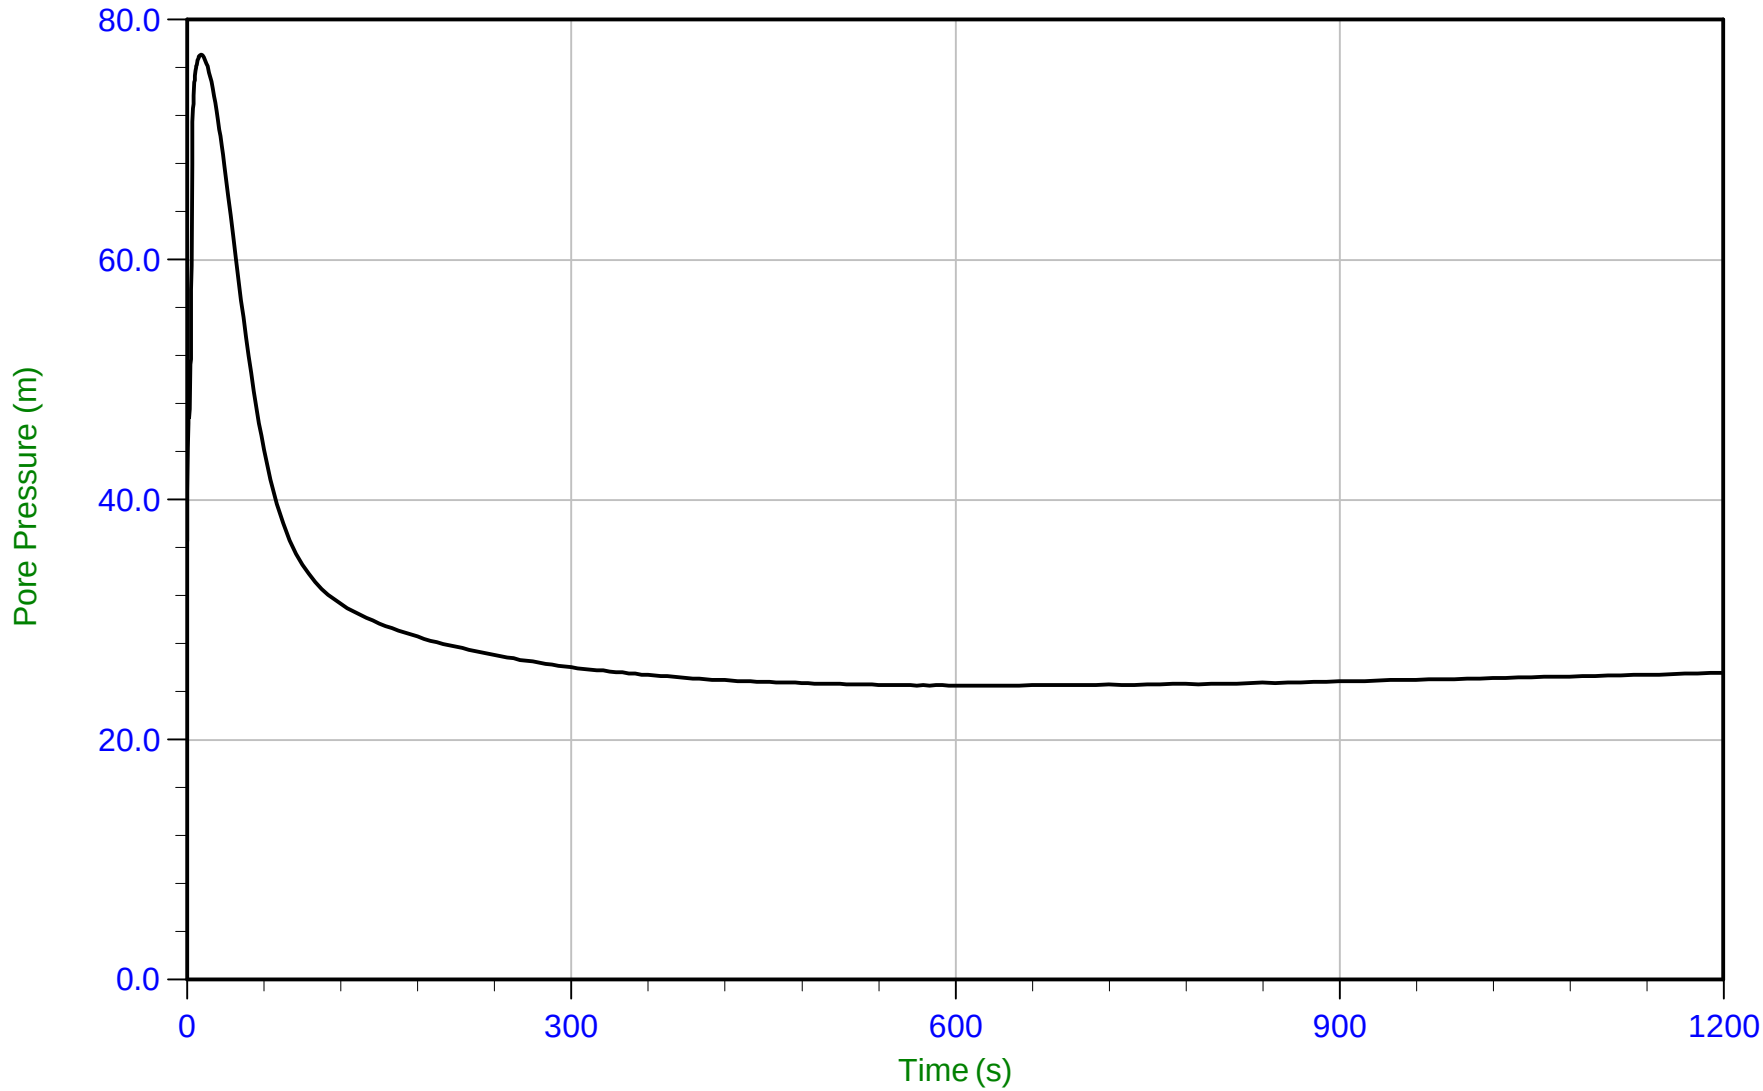

Trace Summary:

Filename: 22-02-23796_RS22-22CPT115.PPF
Depth: 5.850 m / 19.193 ft
Duration: 1200.0 s


u Min: 24.5 m
u Max: 77.1 m
u Final: 25.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/15/2022 07:30
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT115
Cone: 822:T1000F10U35 Area=15 cm²

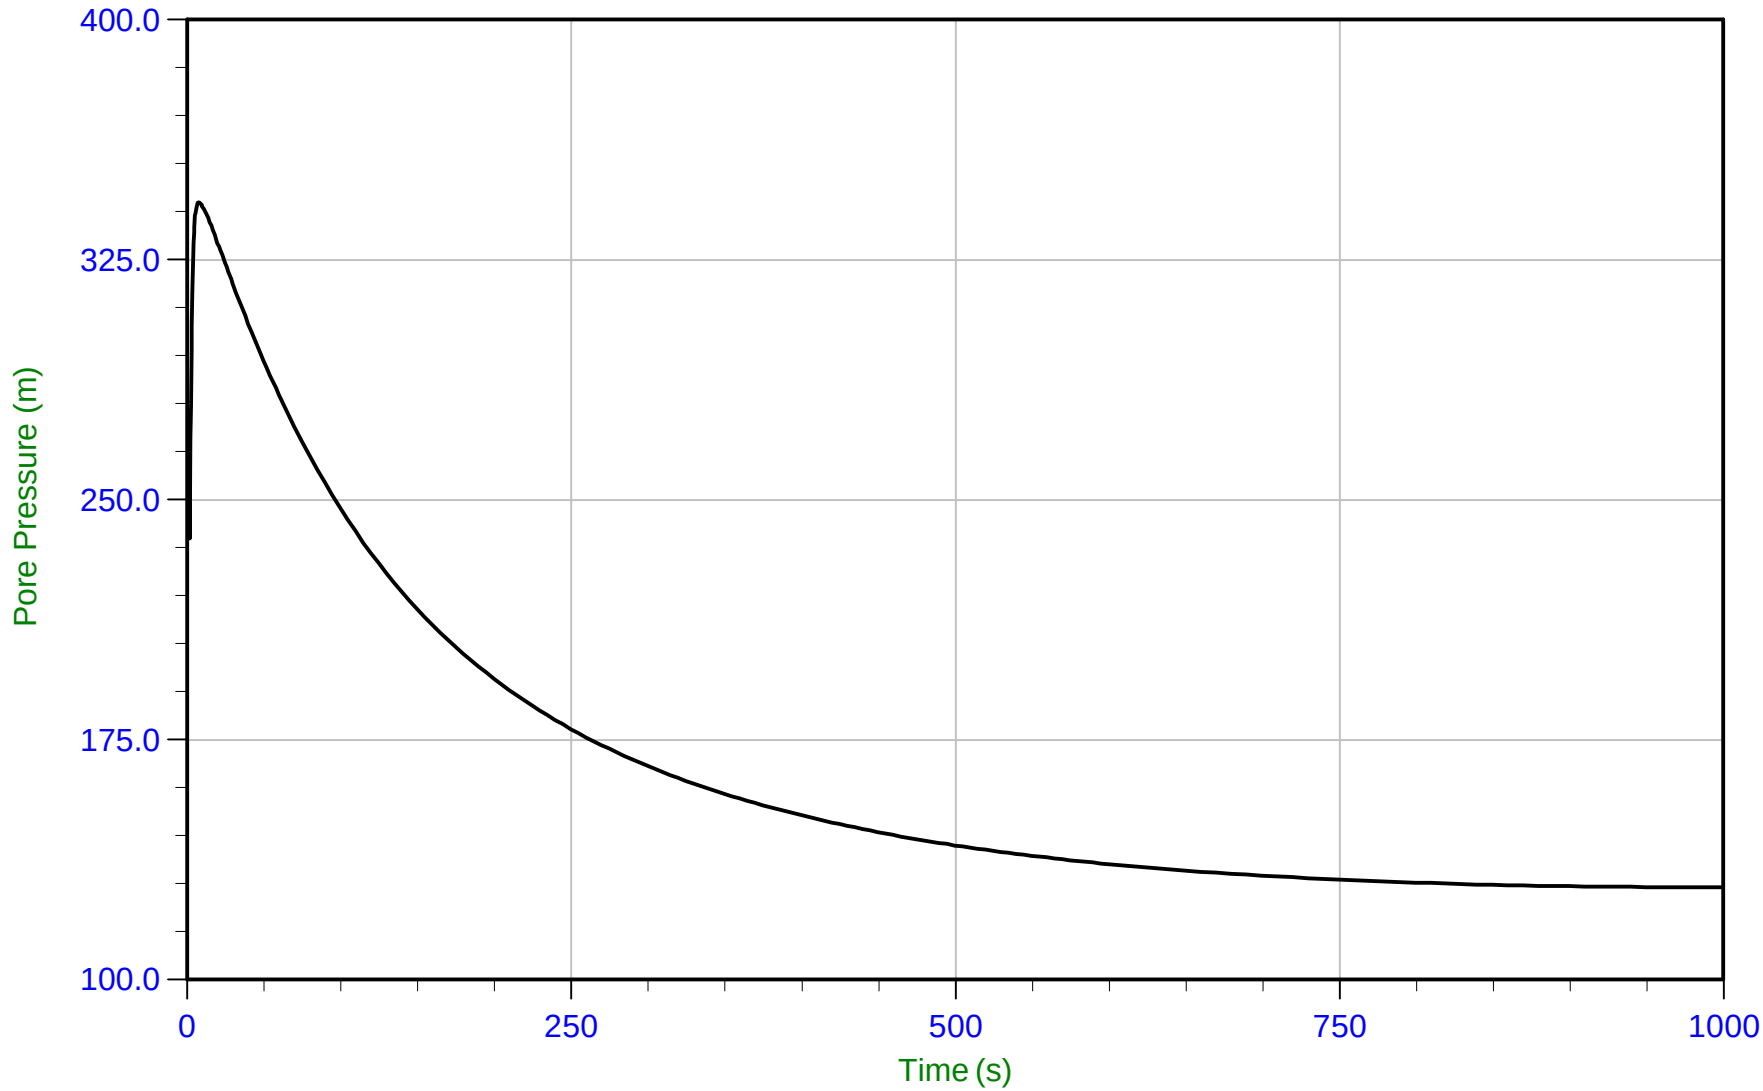

Trace Summary:

Filename: 22-02-23796_RS22-22CPT115.PPF
Depth: 12.025 m / 39.452 ft
Duration: 1000.0 s


u Min: 128.9 m
u Max: 343.0 m
u Final: 128.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/14/2022 16:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT117
Cone: 822:T1000F10U35 Area=15 cm²

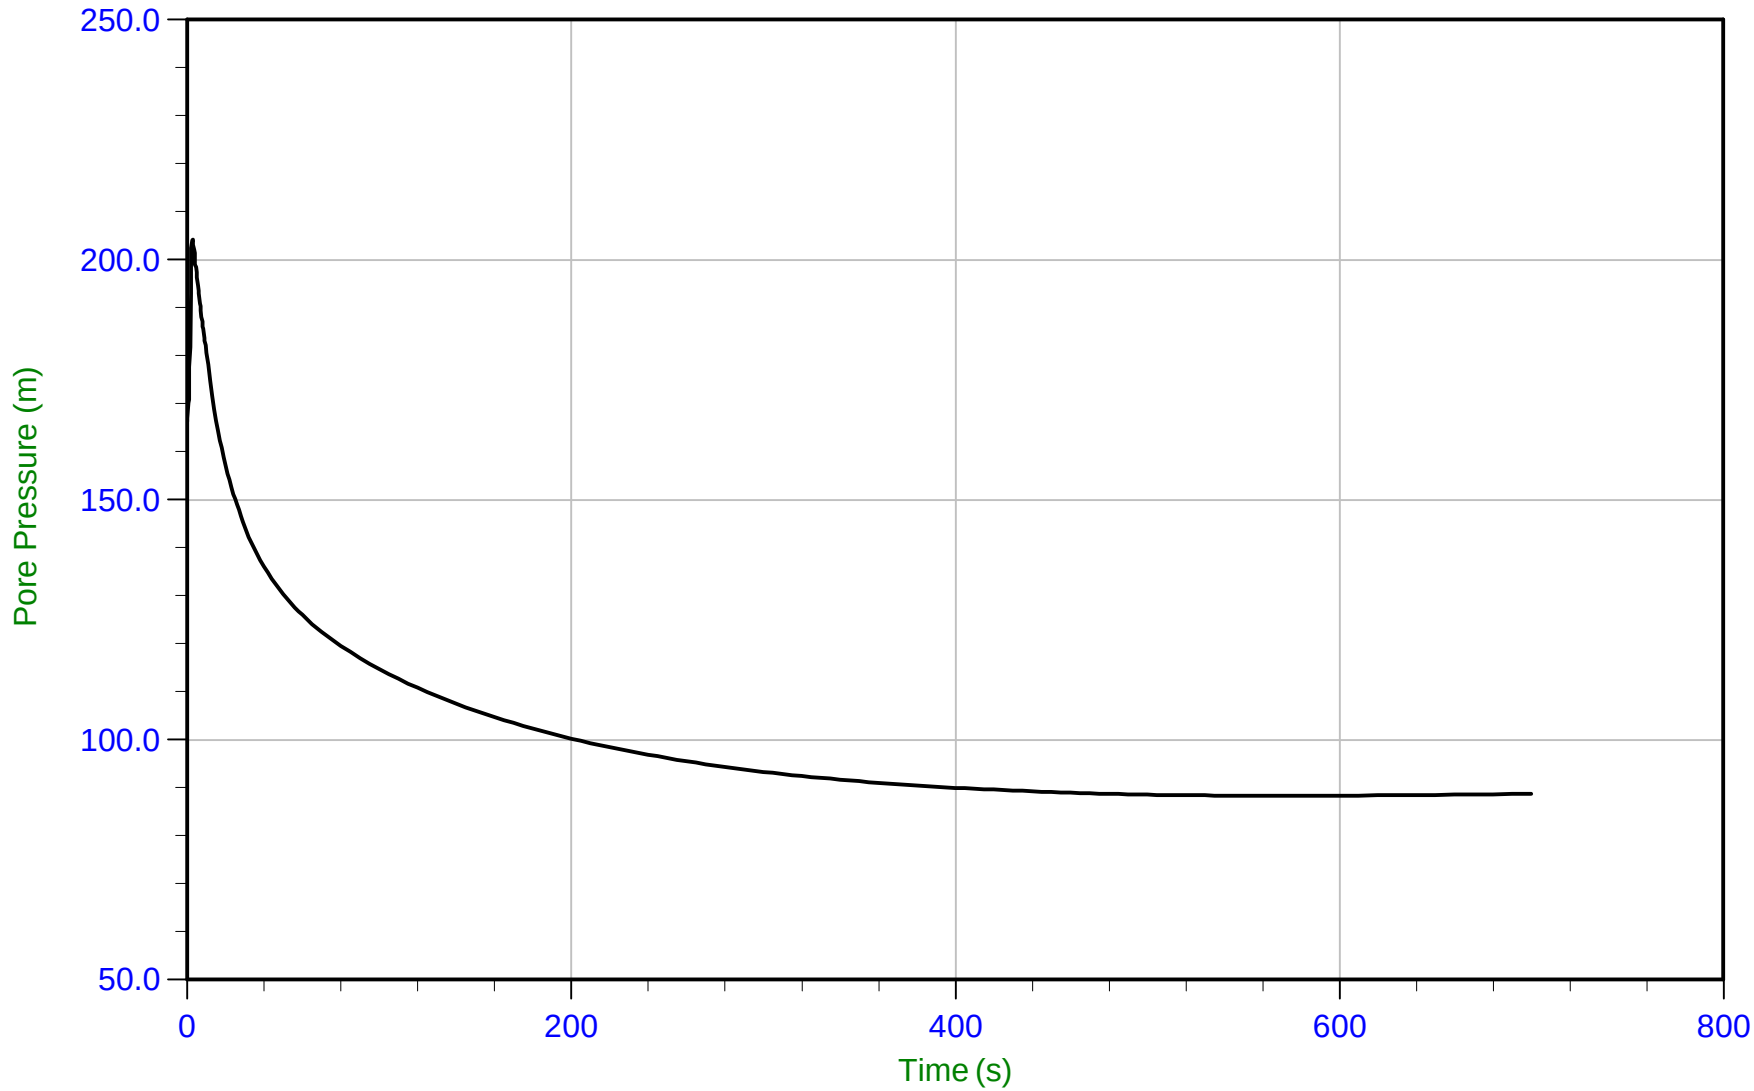

Trace Summary:

Filename: 22-02-23796_RP22-22CPT117.PPF
Depth: 5.800 m / 19.029 ft
Duration: 700.0 s


u Min: 88.3 m
u Max: 204.2 m
u Final: 88.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 08:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT118
Cone: 750:T1500F15U35 Area=15 cm²

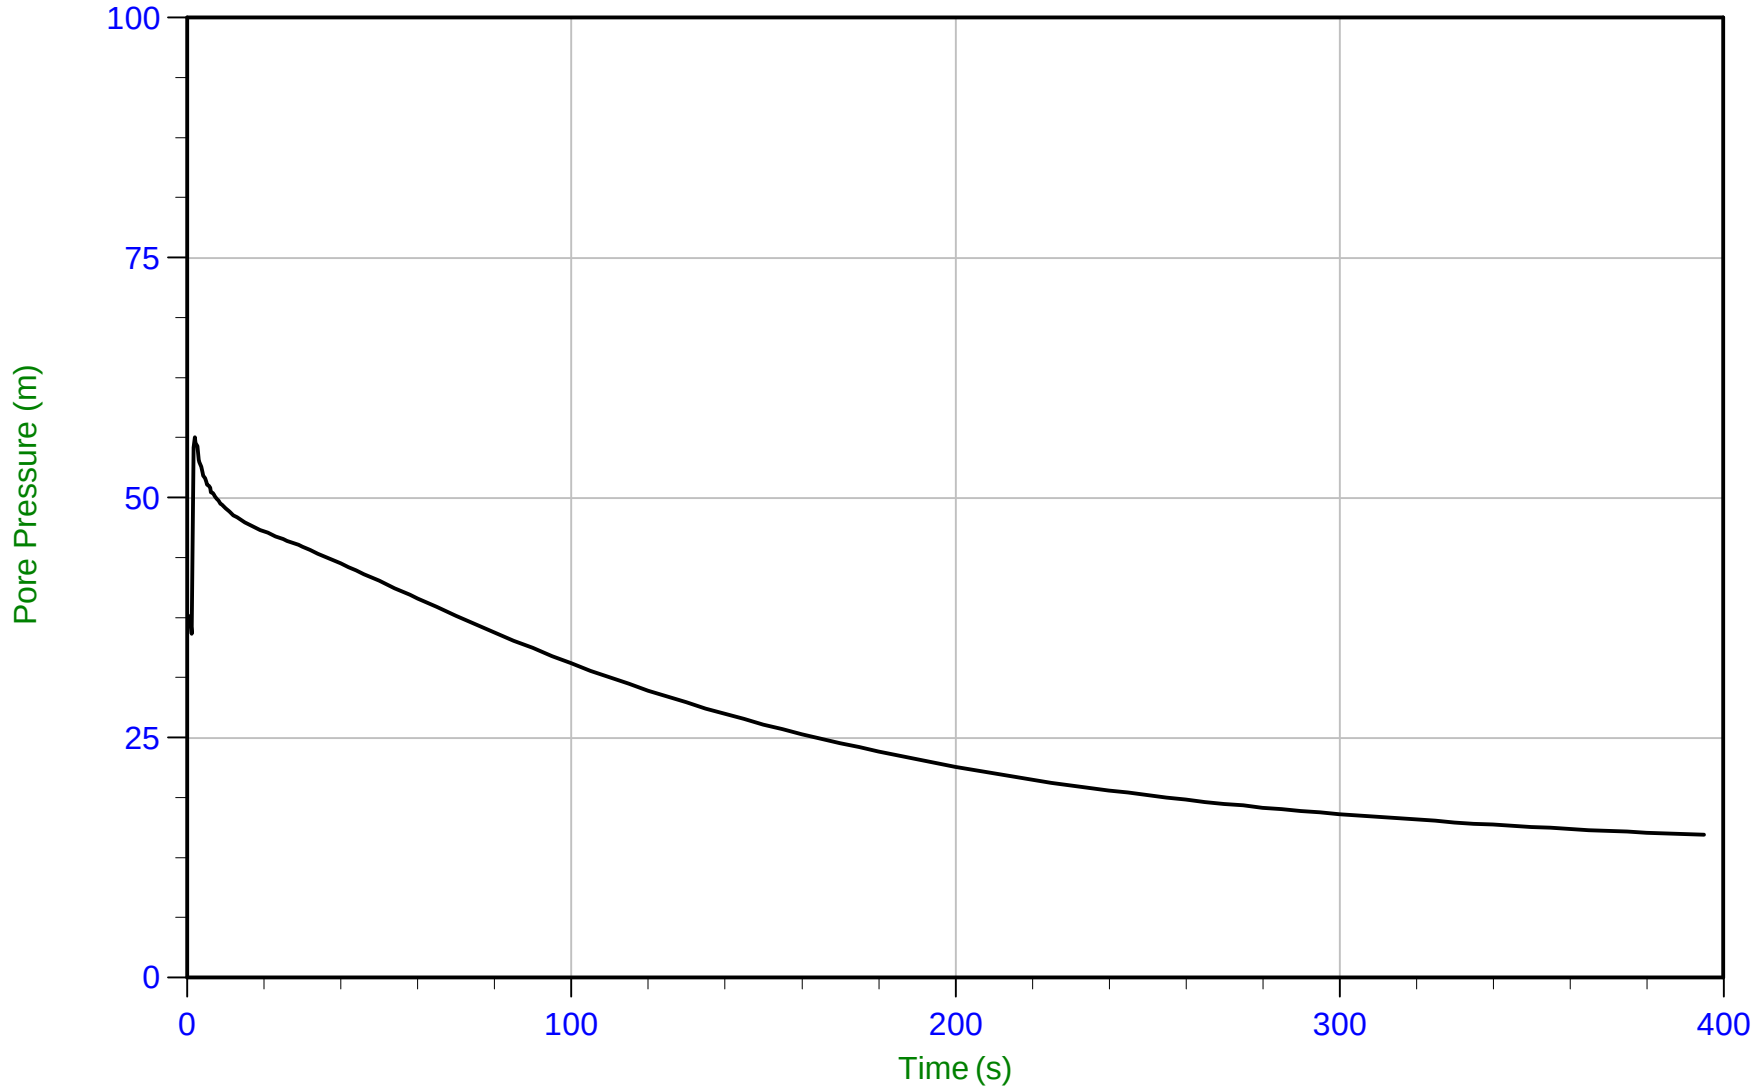

Trace Summary:

Filename: 22-02-23796_RP22-22CPT118.PPF
Depth: 5.900 m / 19.357 ft
Duration: 395.0 s


u Min: 14.9 m
u Max: 56.3 m
u Final: 14.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 08:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT118
Cone: 750:T1500F15U35 Area=15 cm²

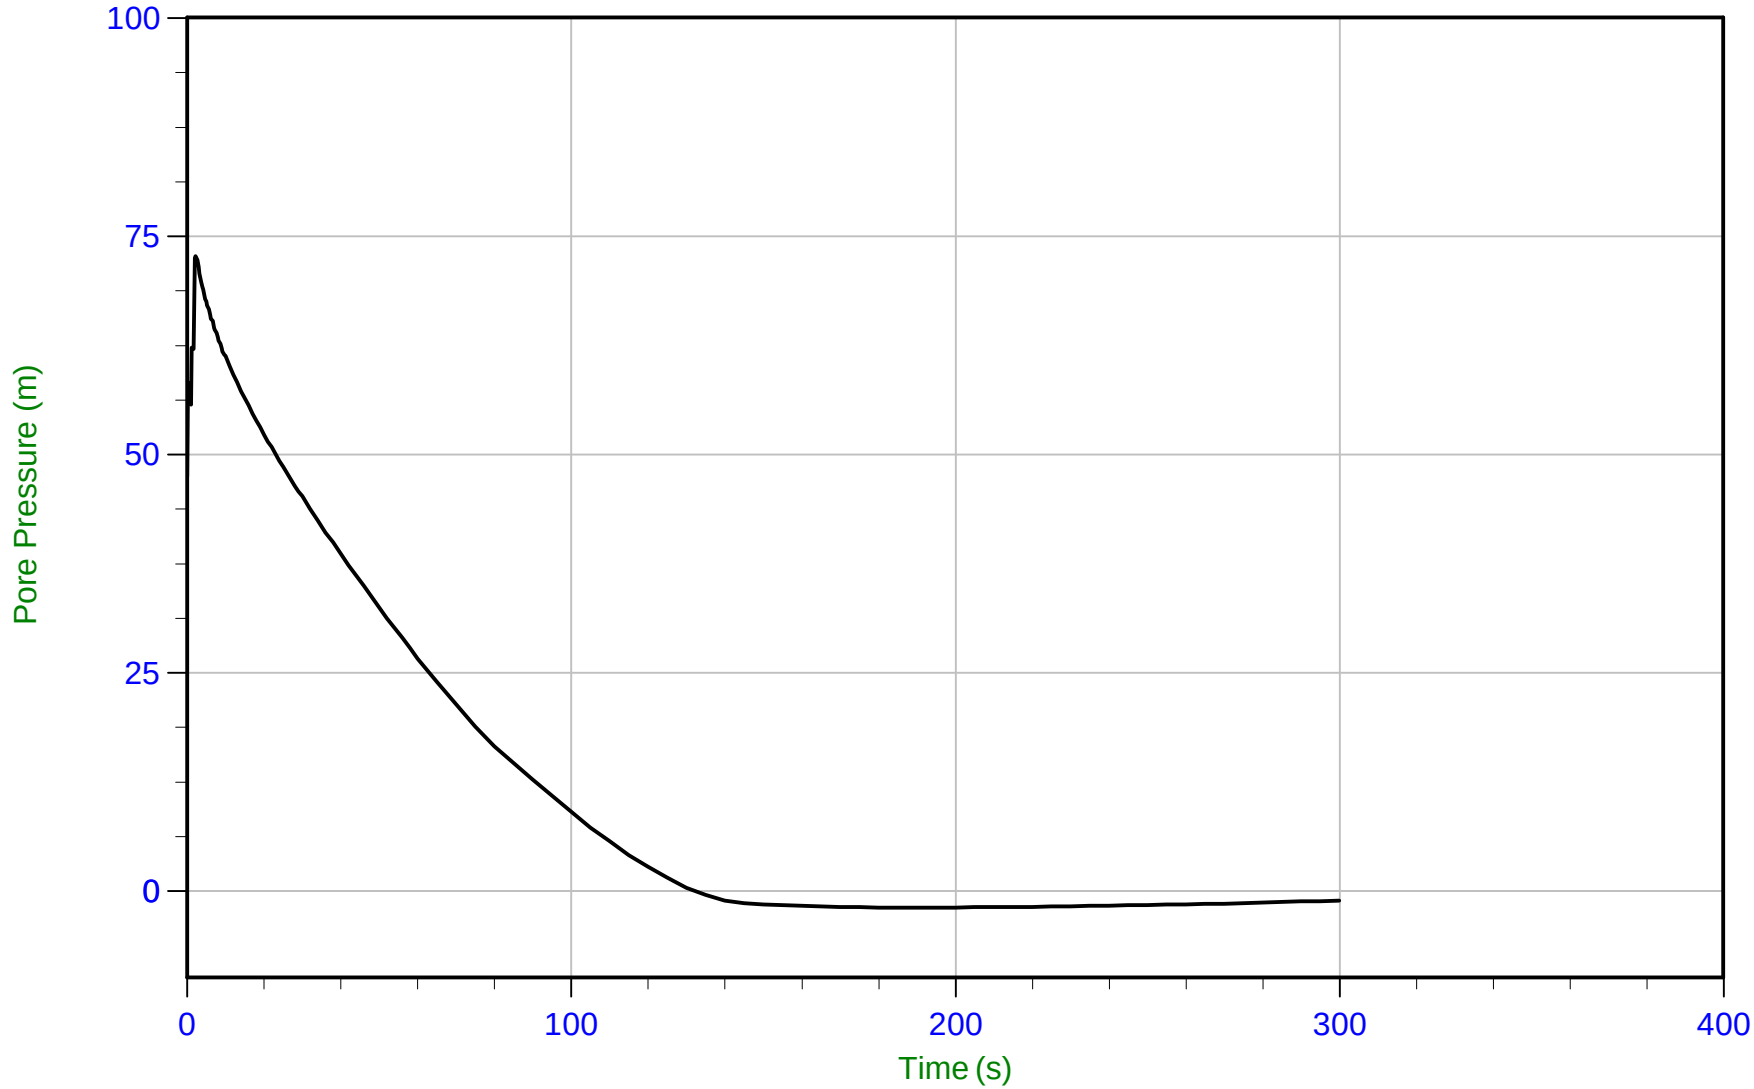

Trace Summary:

Filename: 22-02-23796_RP22-22CPT118.PPF
Depth: 9.900 m / 32.480 ft
Duration: 300.0 s


u Min: -2.0 m
u Max: 72.7 m
u Final: -1.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 07:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT119
Cone: 750:T1500F15U35 Area=15 cm²

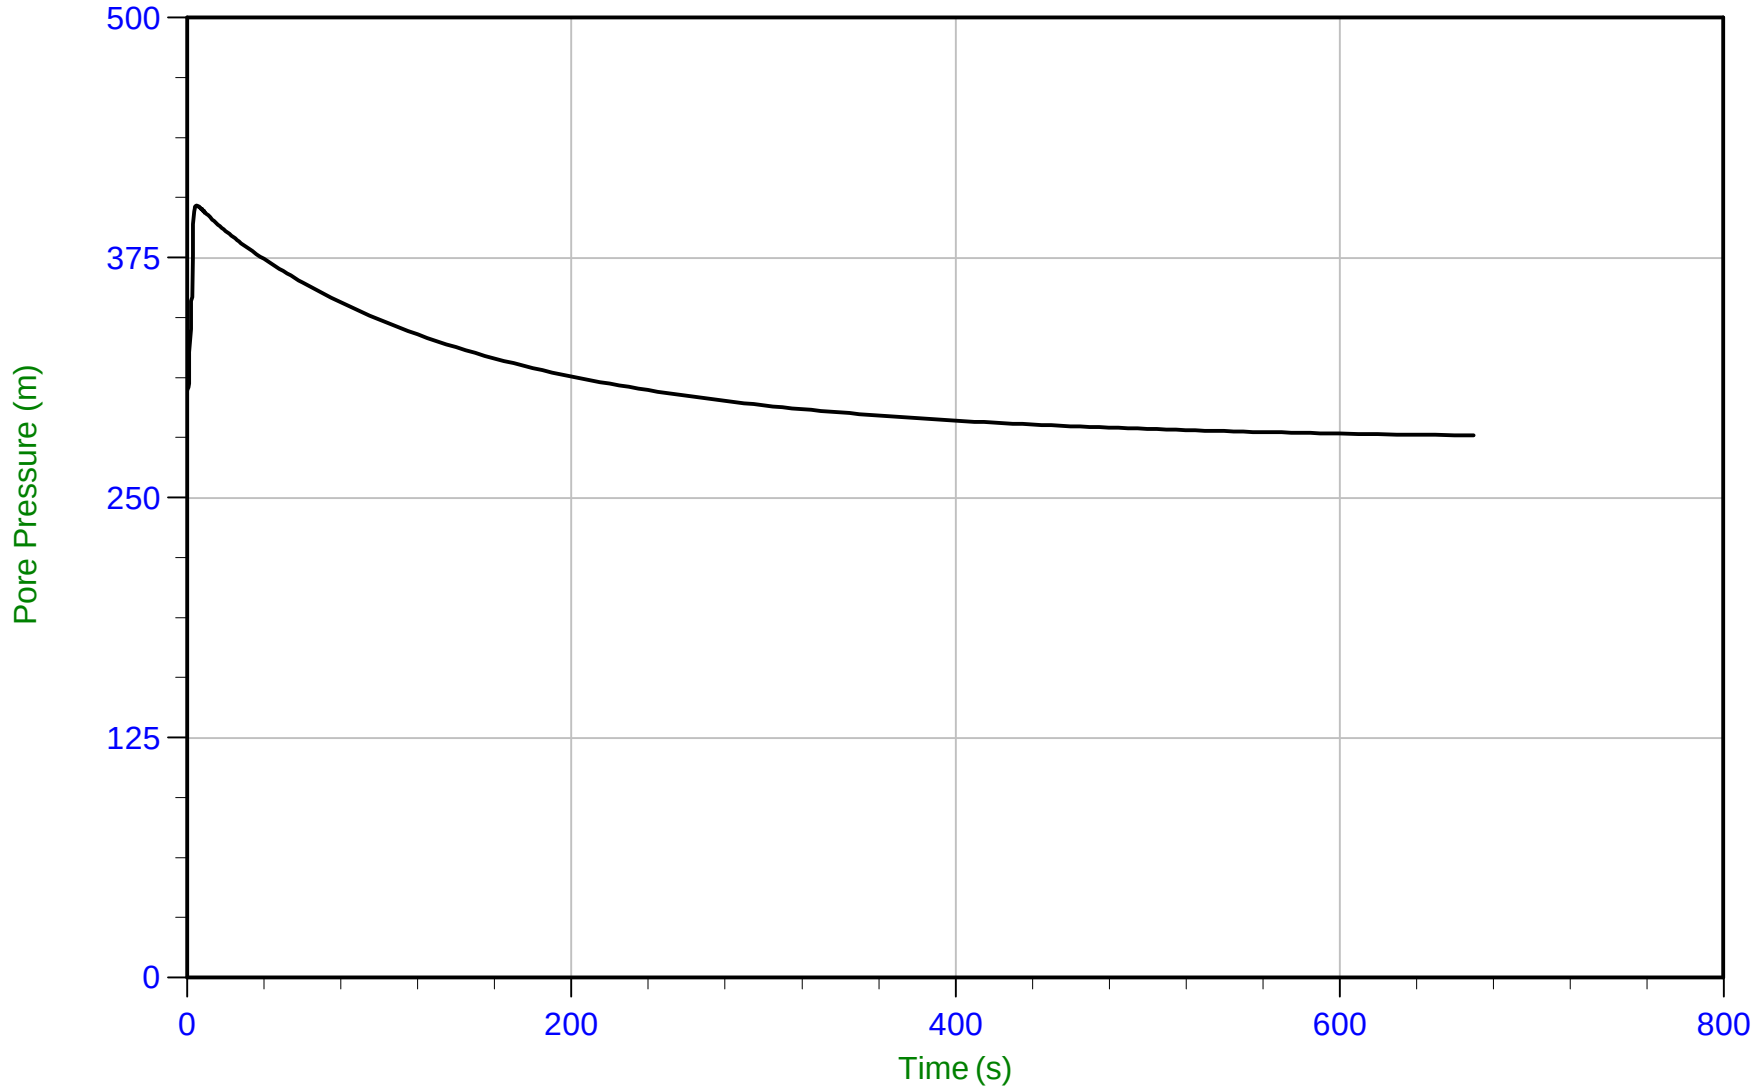

Trace Summary:

Filename: 22-02-23796_RP22-22CPT119.PPF
Depth: 9.225 m / 30.265 ft
Duration: 670.0 s


u Min: 282.4 m
u Max: 402.1 m
u Final: 282.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 07:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT119
Cone: 750:T1500F15U35 Area=15 cm²

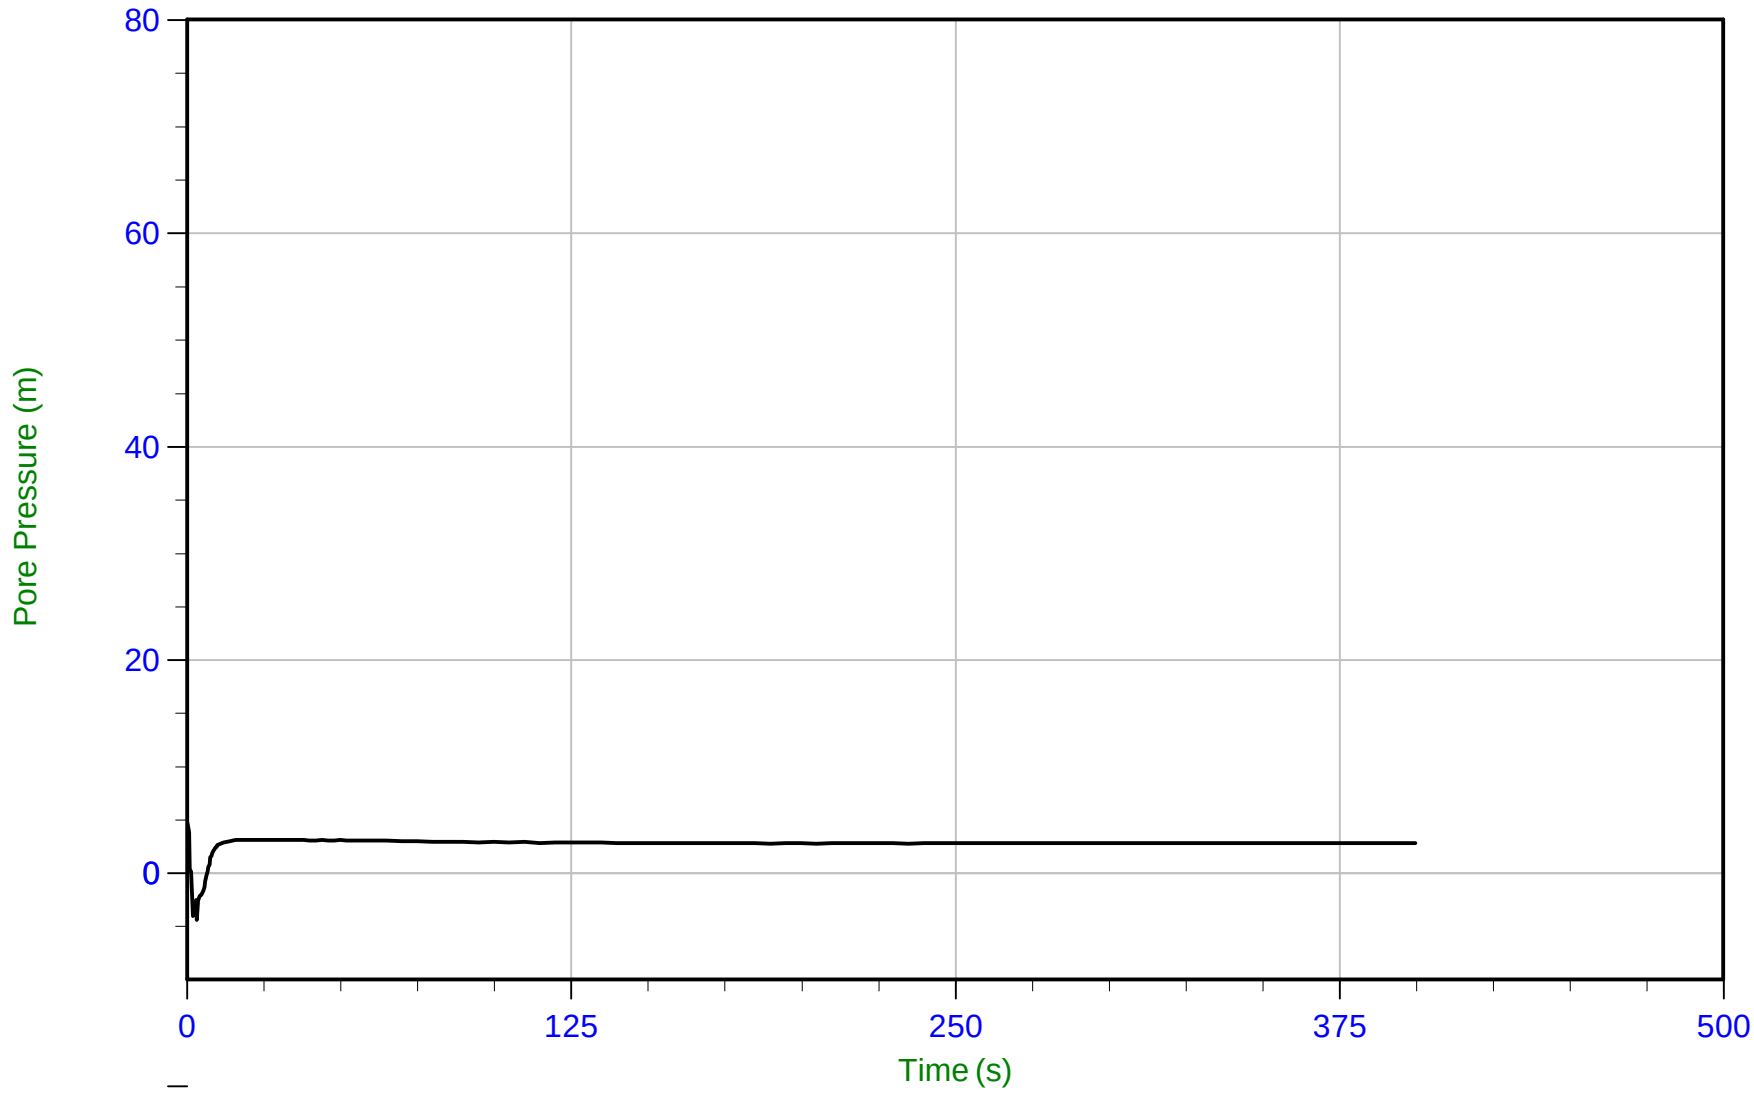

Trace Summary:

Filename: 22-02-23796_RP22-22CPT119.PPF
Depth: 10.450 m / 34.284 ft
Duration: 400.0 s


u Min: -4.4 m
u Max: 4.8 m
u Final: 2.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 16:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT120
Cone: 750:T1500F15U35 Area=15 cm²

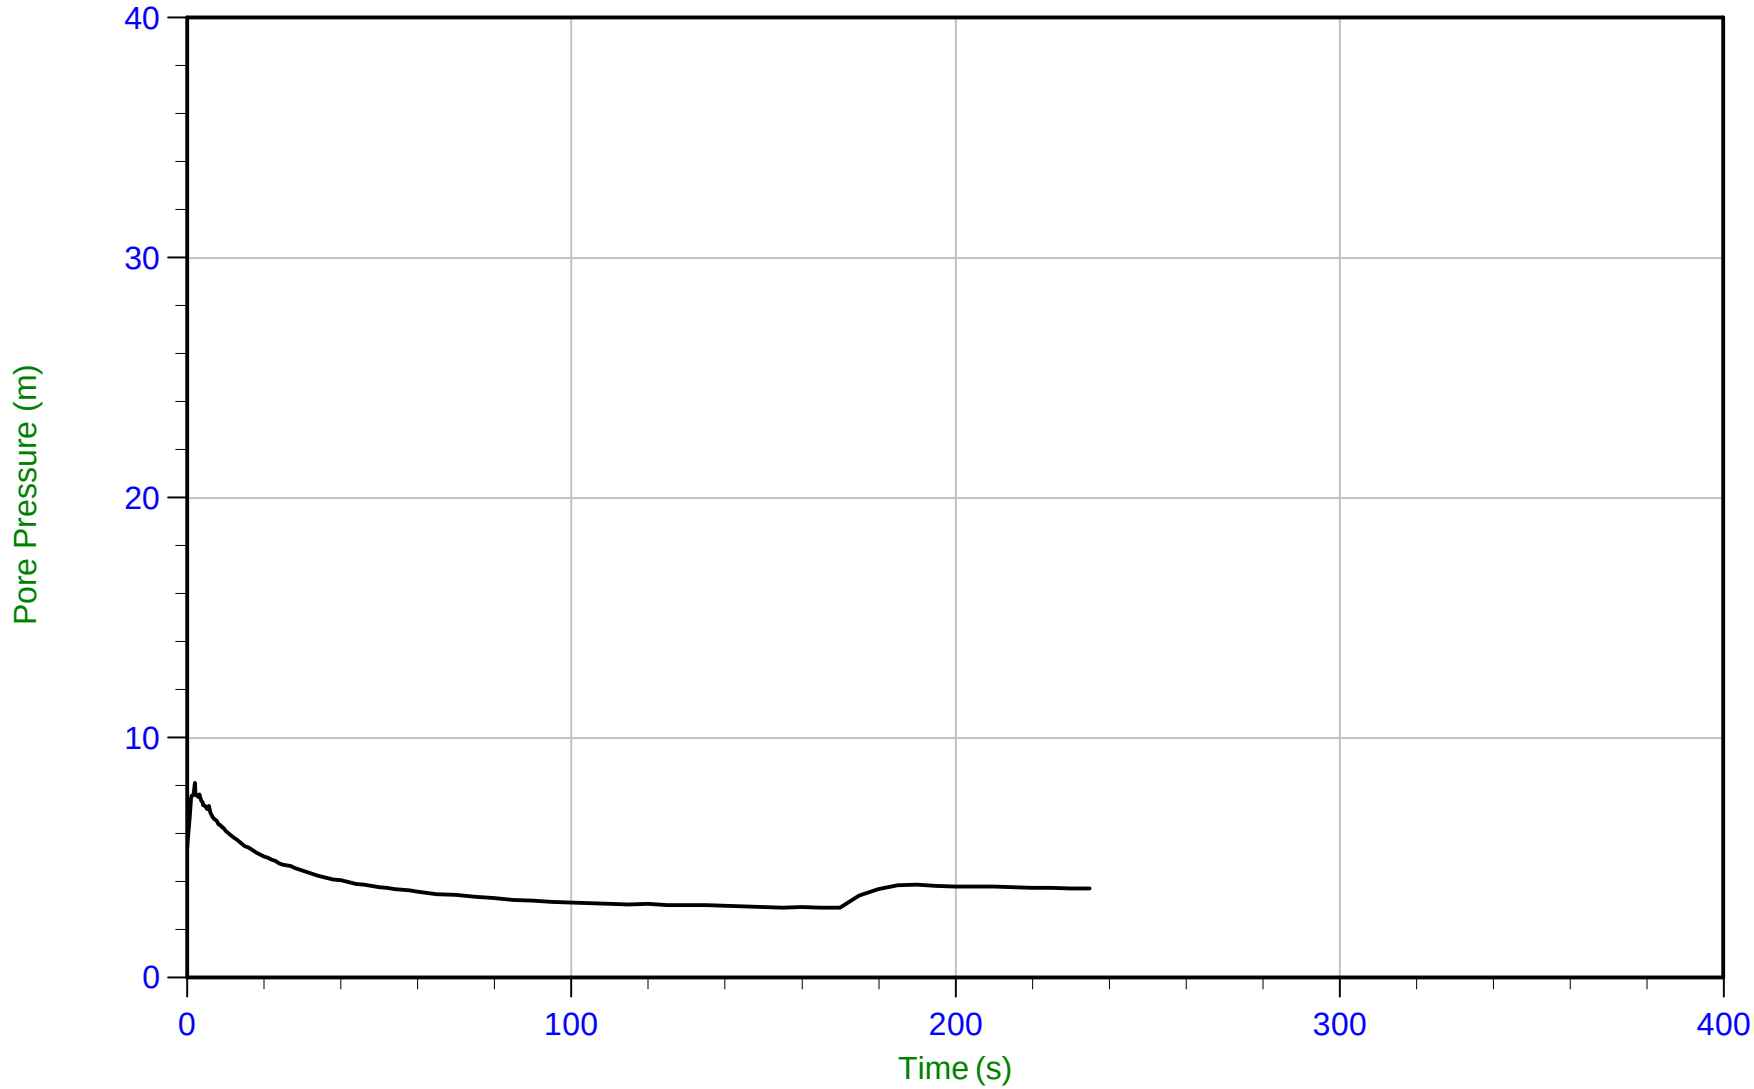

Trace Summary:

Filename: 22-02-23796_RP22-22CPT120.PPF
Depth: 2.975 m / 9.760 ft
Duration: 235.0 s


u Min: 2.9 m
u Max: 8.1 m
u Final: 3.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 16:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT120
Cone: 750:T1500F15U35 Area=15 cm²

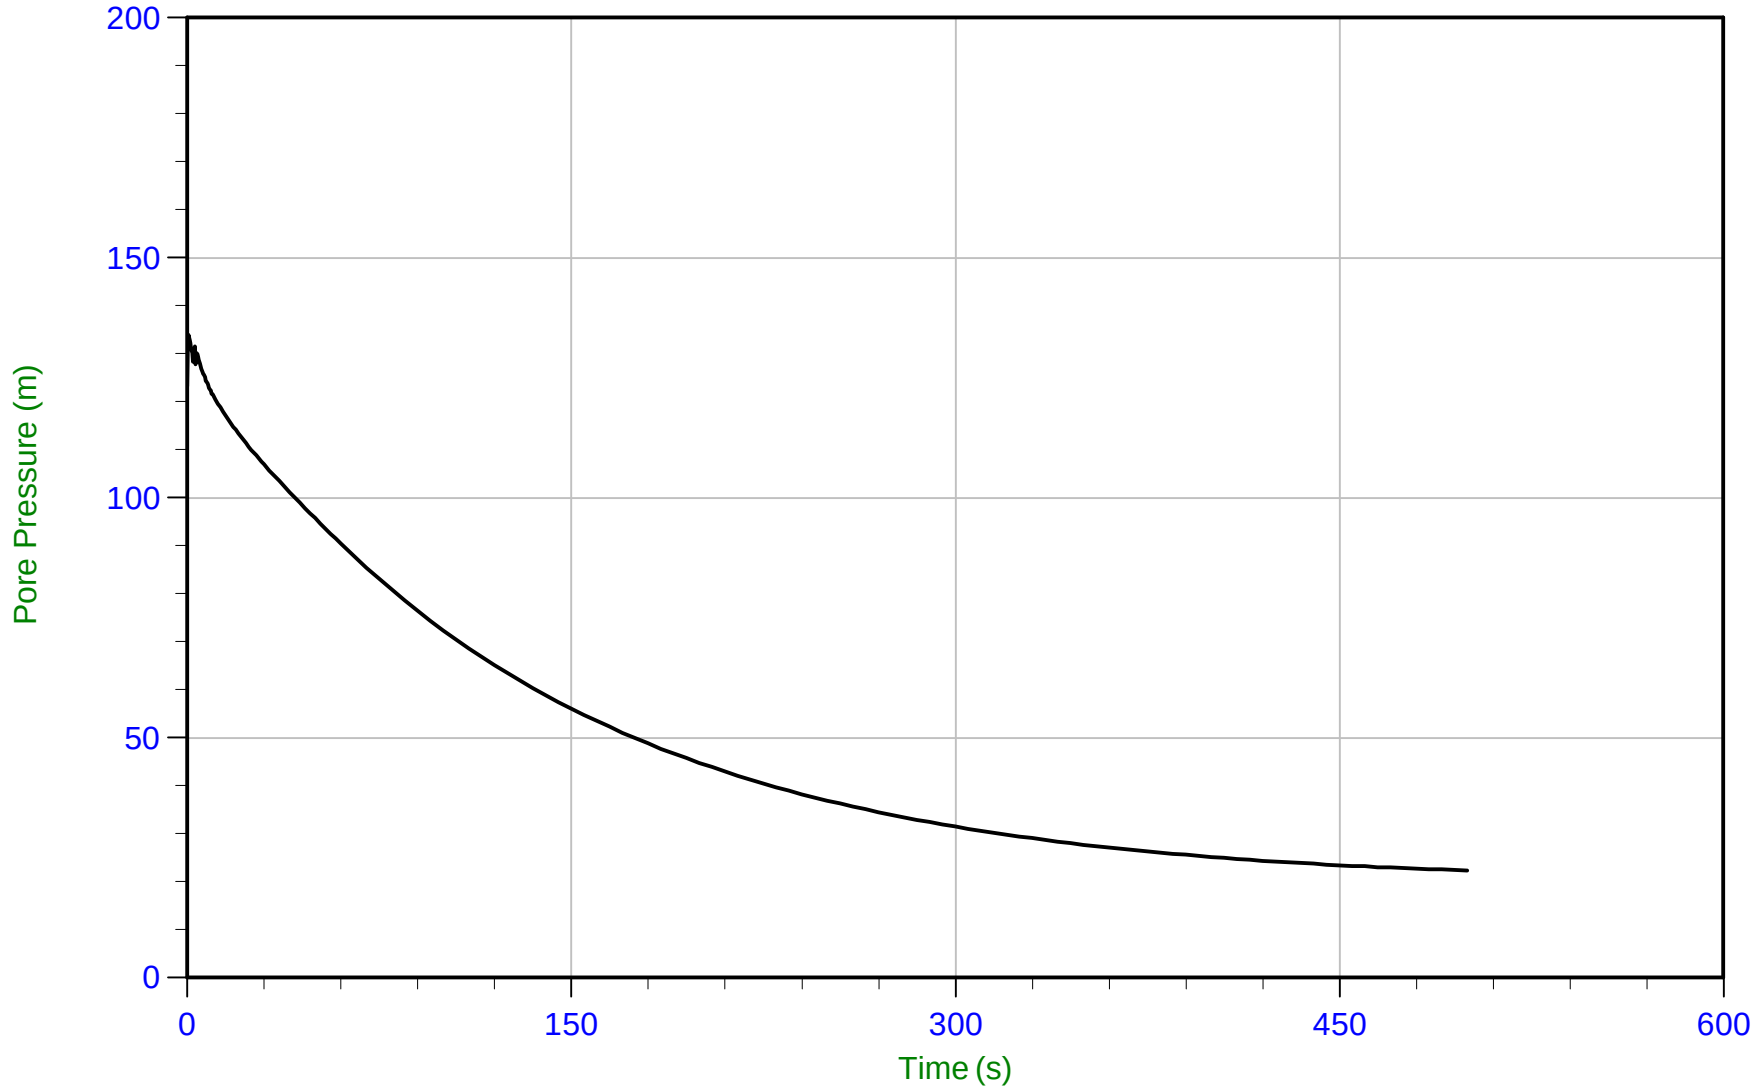

Trace Summary:

Filename: 22-02-23796_RP22-22CPT120.PPF
Depth: 7.850 m / 25.754 ft
Duration: 500.0 s


u Min: 22.4 m
u Max: 133.9 m
u Final: 22.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 16:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT120
Cone: 750:T1500F15U35 Area=15 cm²

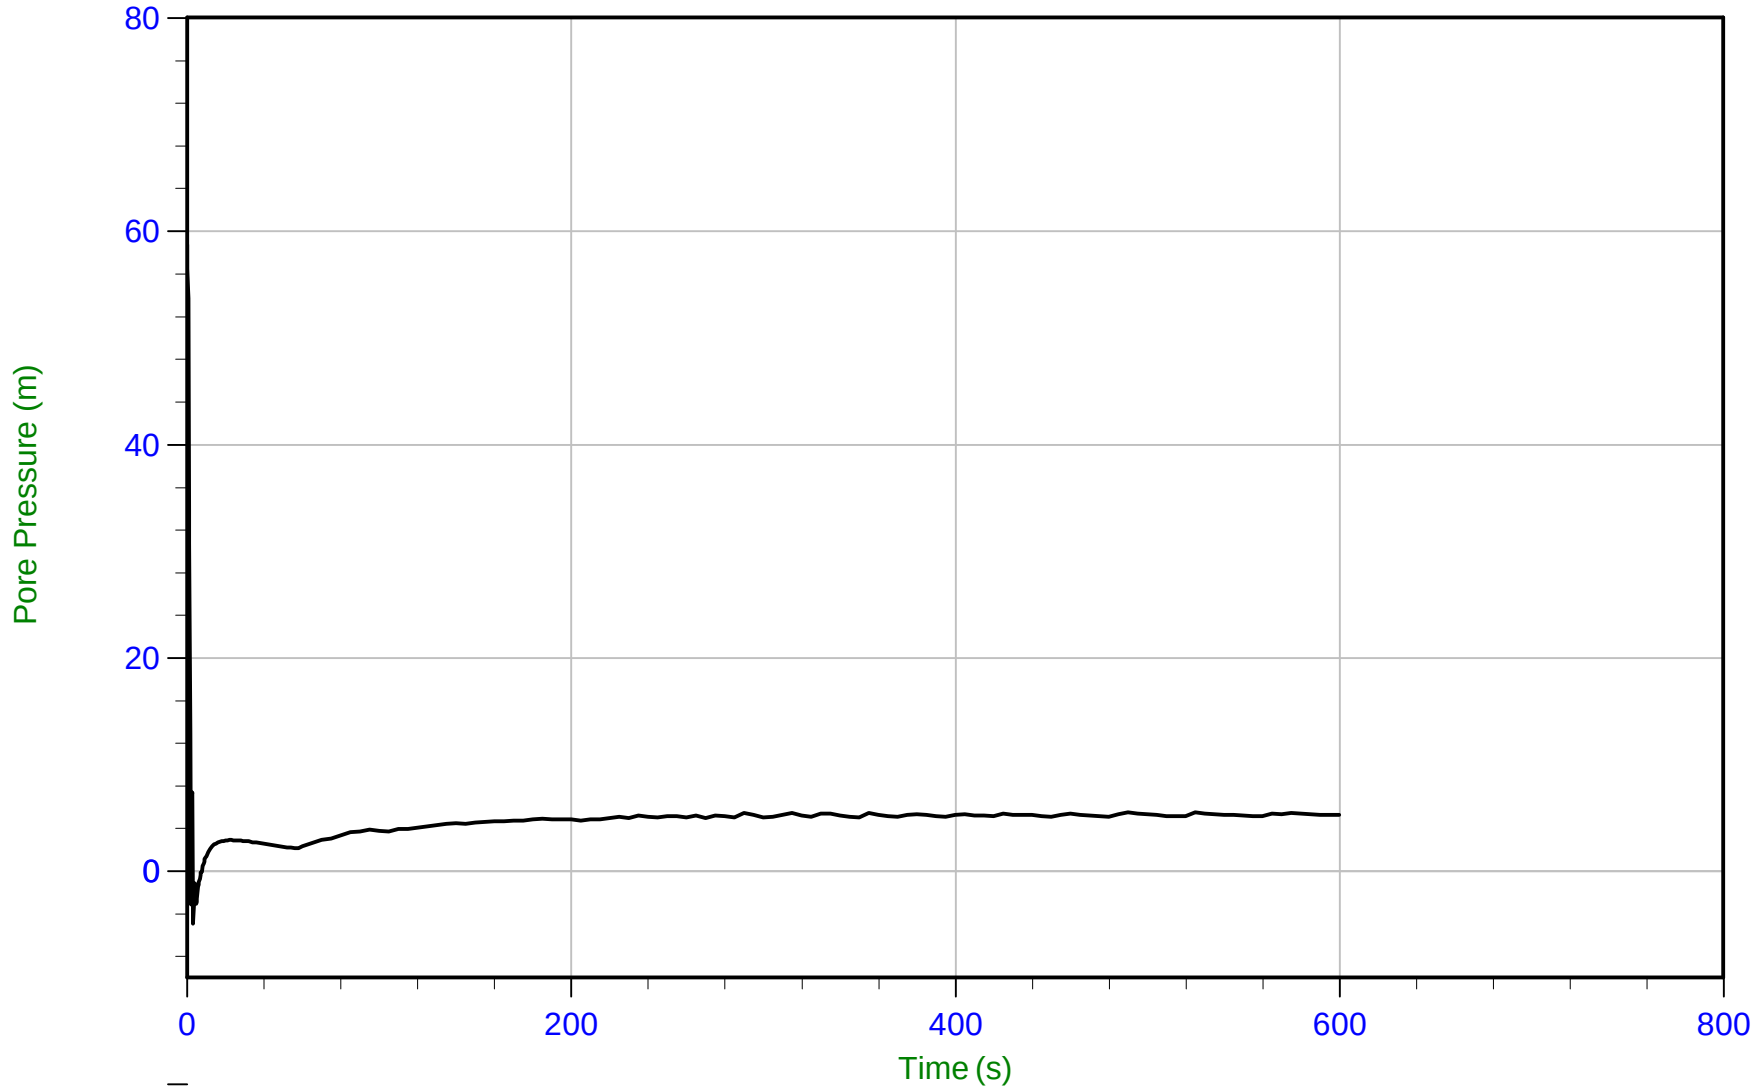

Trace Summary:

Filename: 22-02-23796_RP22-22CPT120.PPF
Depth: 9.300 m / 30.511 ft
Duration: 600.0 s

u Min: -4.9 m
u Max: 58.7 m
u Final: 5.2 m


WT: 4.100 m / 13.451 ft
Ueq: 5.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 15:53
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT121
Cone: 750:T1500F15U35 Area=15 cm²

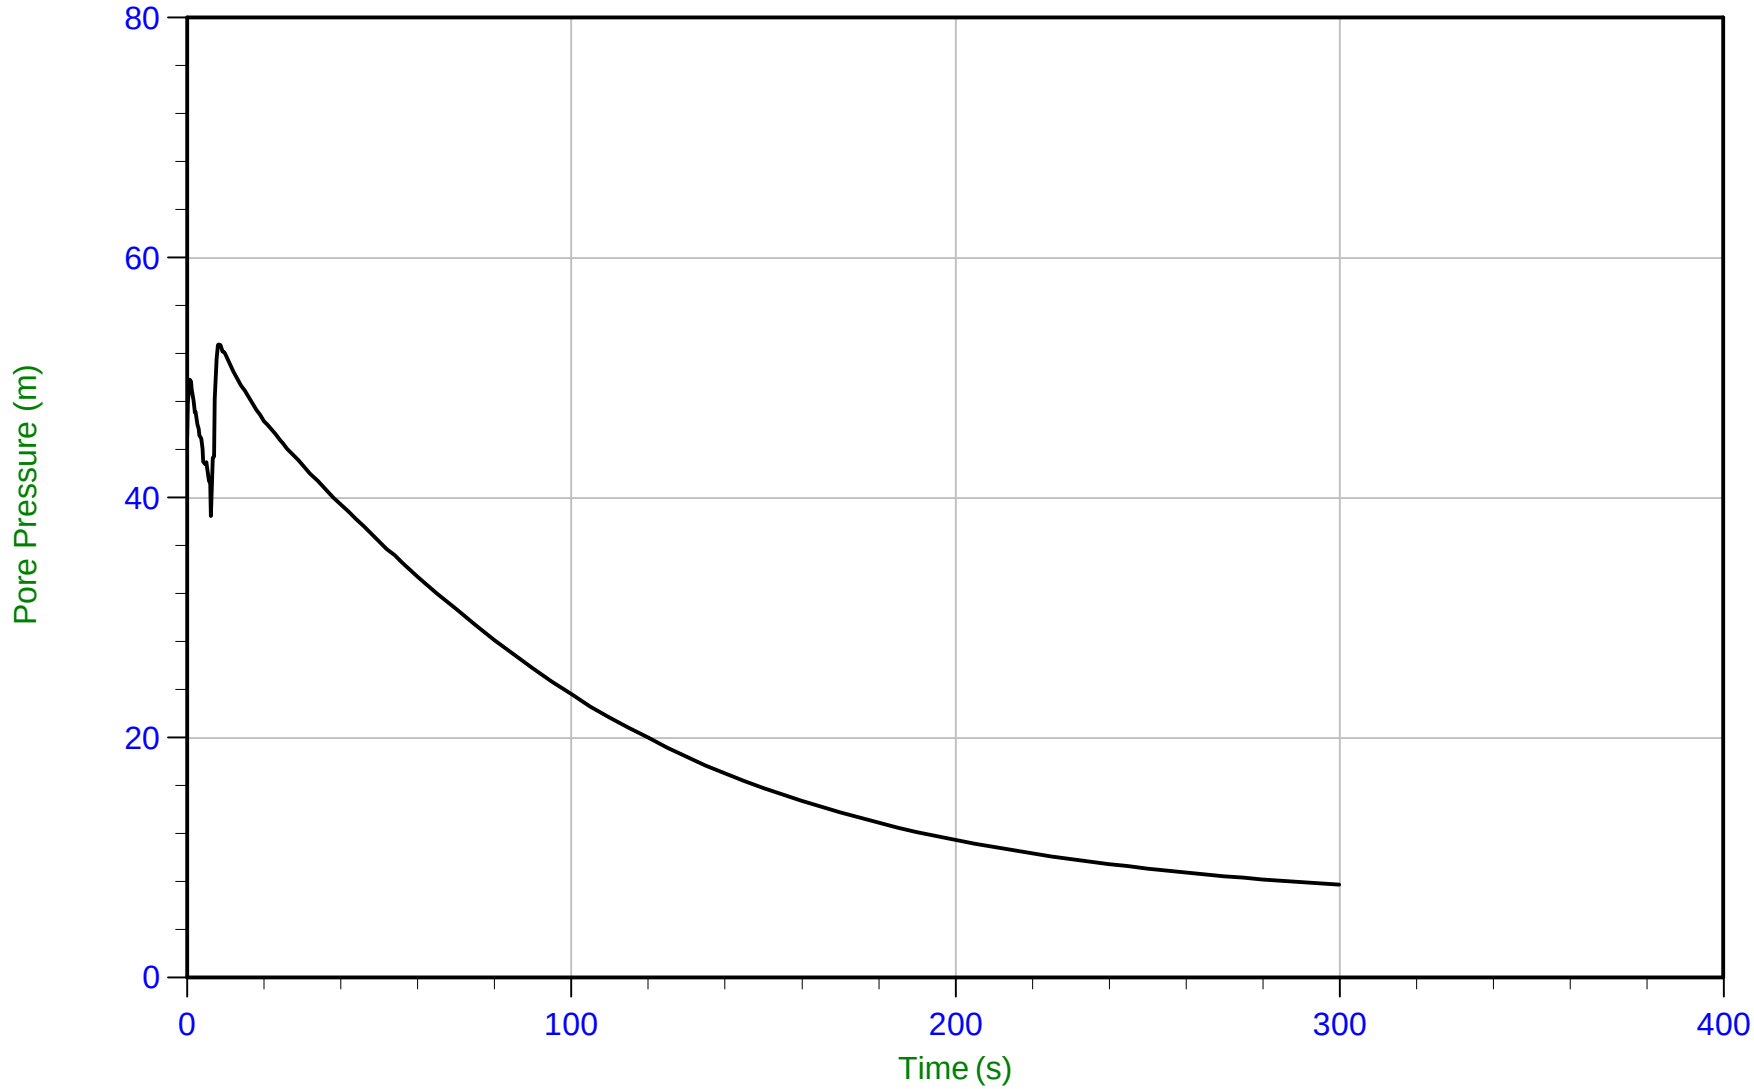

Trace Summary:

Filename: 22-02-23796_RS22-22CPT121.PPF
Depth: 6.900 m / 22.638 ft
Duration: 300.0 s


u Min: 7.7 m
u Max: 52.8 m
u Final: 7.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/14/2022 15:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT122
Cone: 822:T1000F10U35 Area=15 cm²

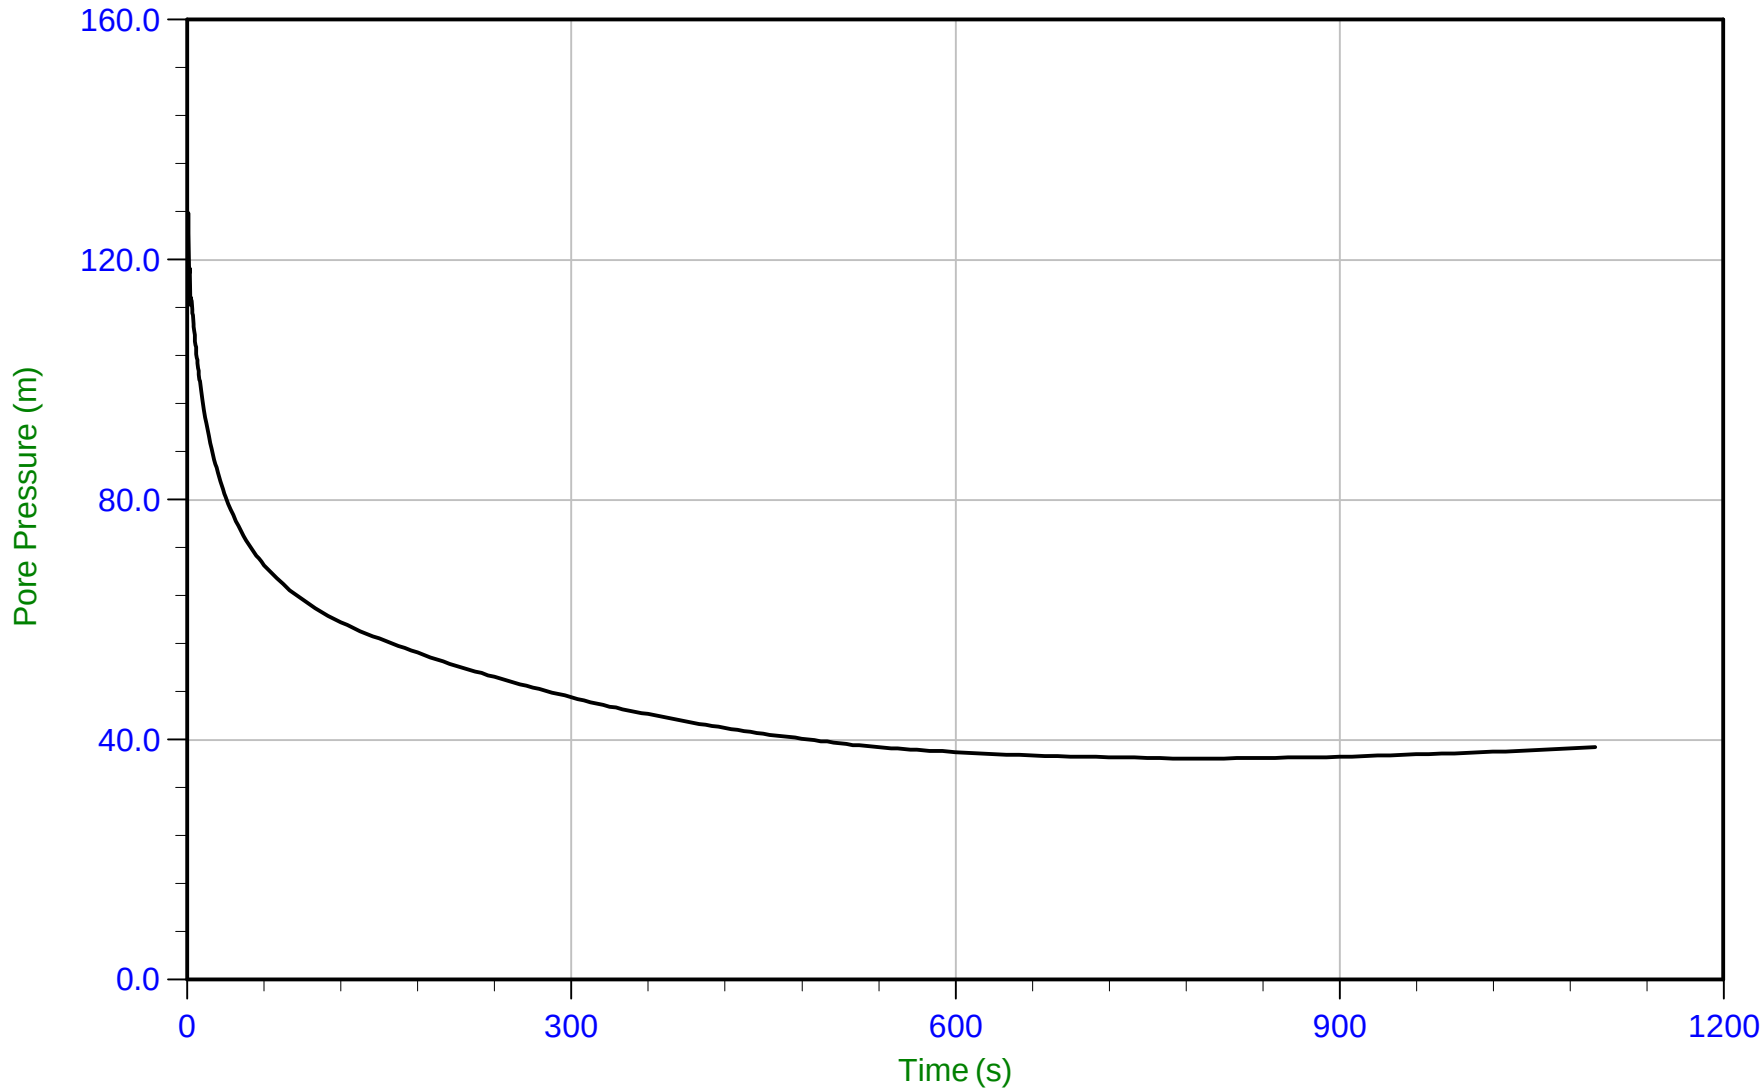

Trace Summary:

Filename: 22-02-23796_RP22-22CPT122.PPF
Depth: 4.875 m / 15.994 ft
Duration: 1100.0 s


u Min: 36.9 m
u Max: 127.9 m
u Final: 38.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/14/2022 13:29
Site: Brooks, Alberta

Sounding: RCPT22-22CPT123B
Cone: 822:T1000F10U35 Area=15 cm²

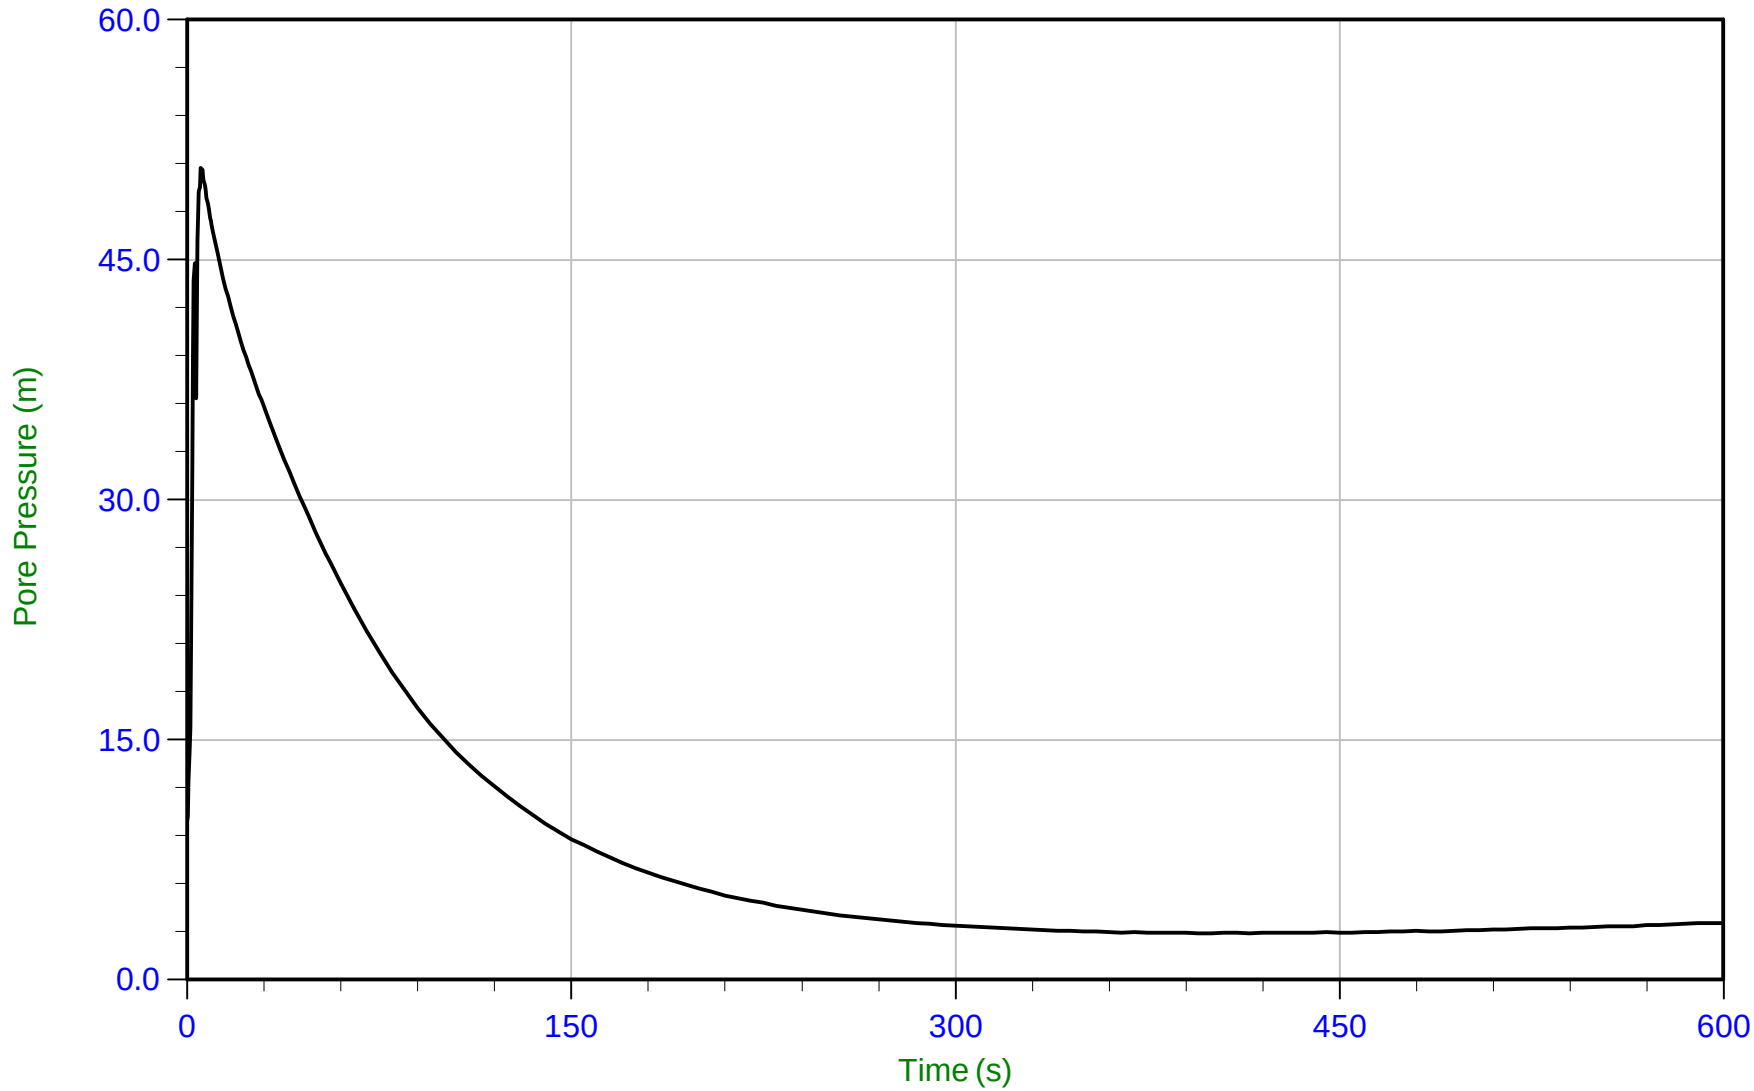

Trace Summary:

Filename: 22-02-23796_RP22-22CPT123B.PPF
Depth: 5.950 m / 19.521 ft
Duration: 600.0 s


u Min: 2.9 m
u Max: 50.7 m
u Final: 3.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/14/2022 11:12
Site: Brooks, Alberta

Sounding: RCPT22-22CPT124
Cone: 822:T1000F10U35 Area=15 cm²

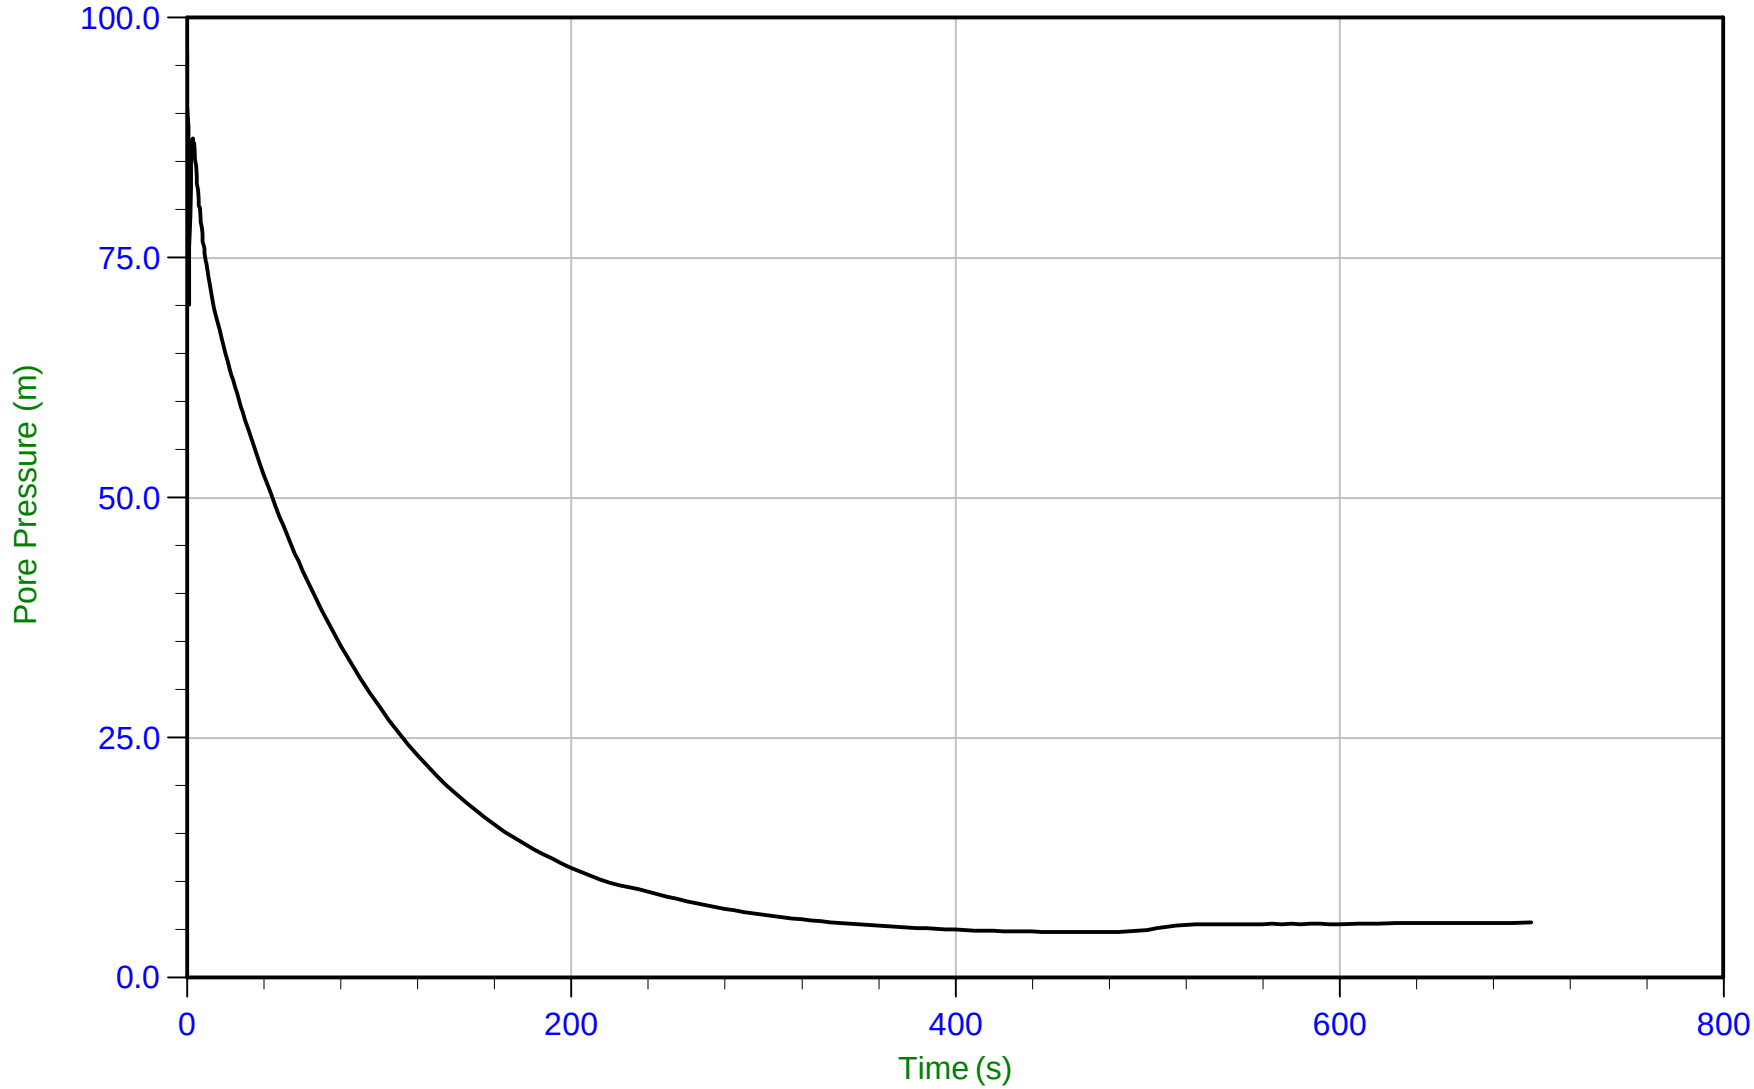

Trace Summary:

Filename: 22-02-23796_RP22-22CPT124.PPF
Depth: 5.775 m / 18.947 ft
Duration: 700.0 s


u Min: 4.7 m
u Max: 96.3 m
u Final: 5.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/14/2022 10:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT125
Cone: 822:T1000F10U35 Area=15 cm²

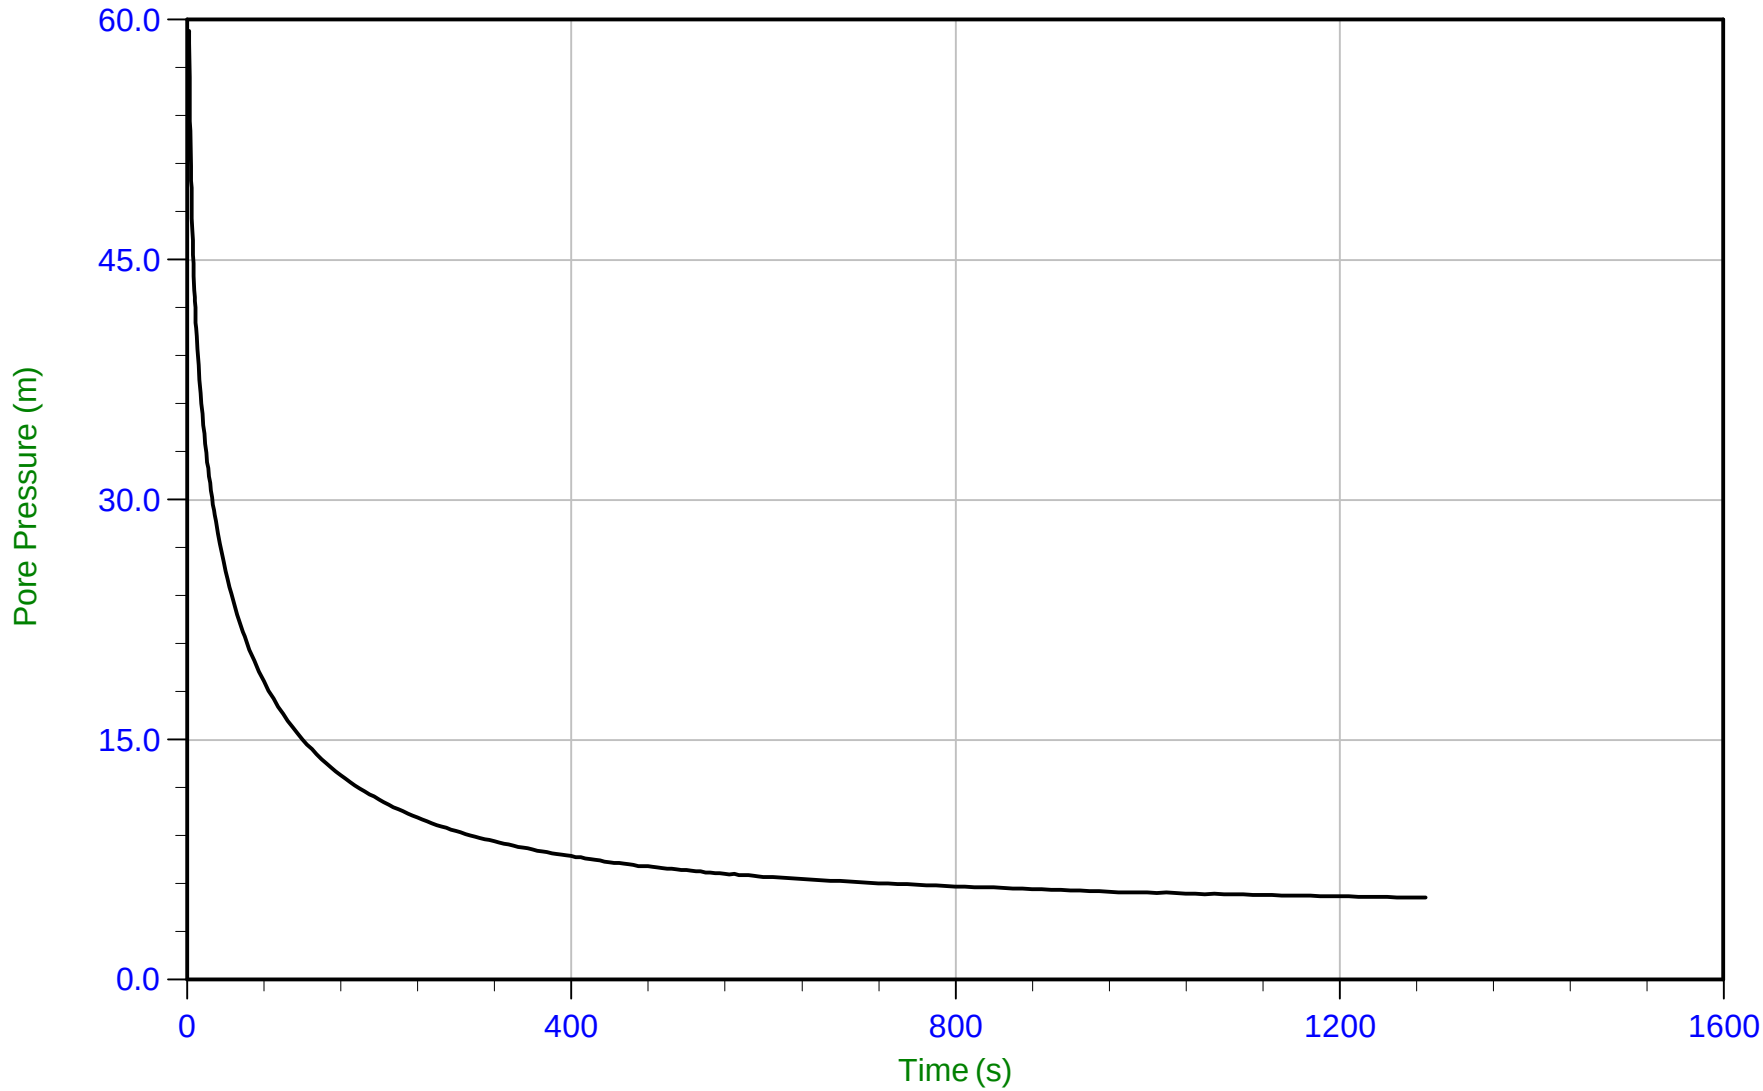

Trace Summary:

Filename: 22-02-23796_RP22-22CPT125.PPF
Depth: 5.825 m / 19.111 ft
Duration: 1290.0 s


u Min: 5.1 m
u Max: 59.3 m
u Final: 5.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 12:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT126
Cone: 750:T1500F15U35 Area=15 cm²

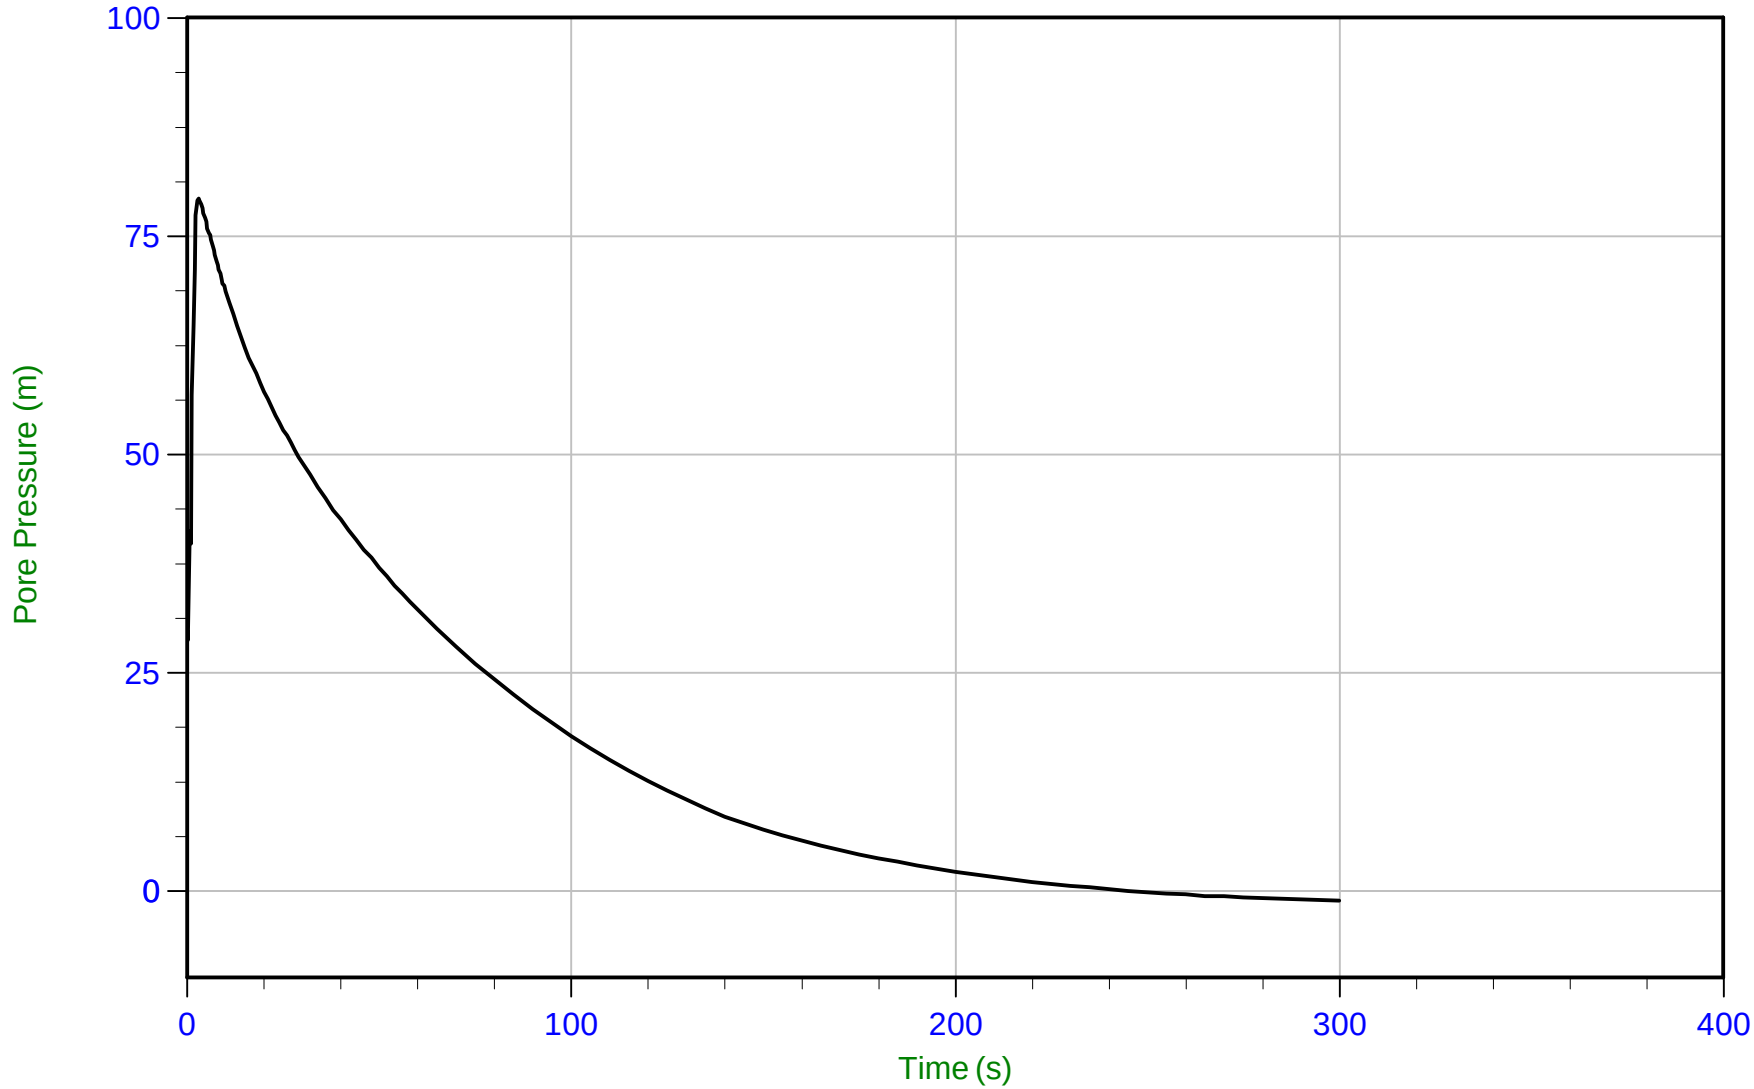

Trace Summary:

Filename: 22-02-23796_RP22-22CPT126.PPF
Depth: 6.875 m / 22.556 ft
Duration: 300.0 s


u Min: -1.2 m
u Max: 79.3 m
u Final: -1.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 12:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT126
Cone: 750:T1500F15U35 Area=15 cm²

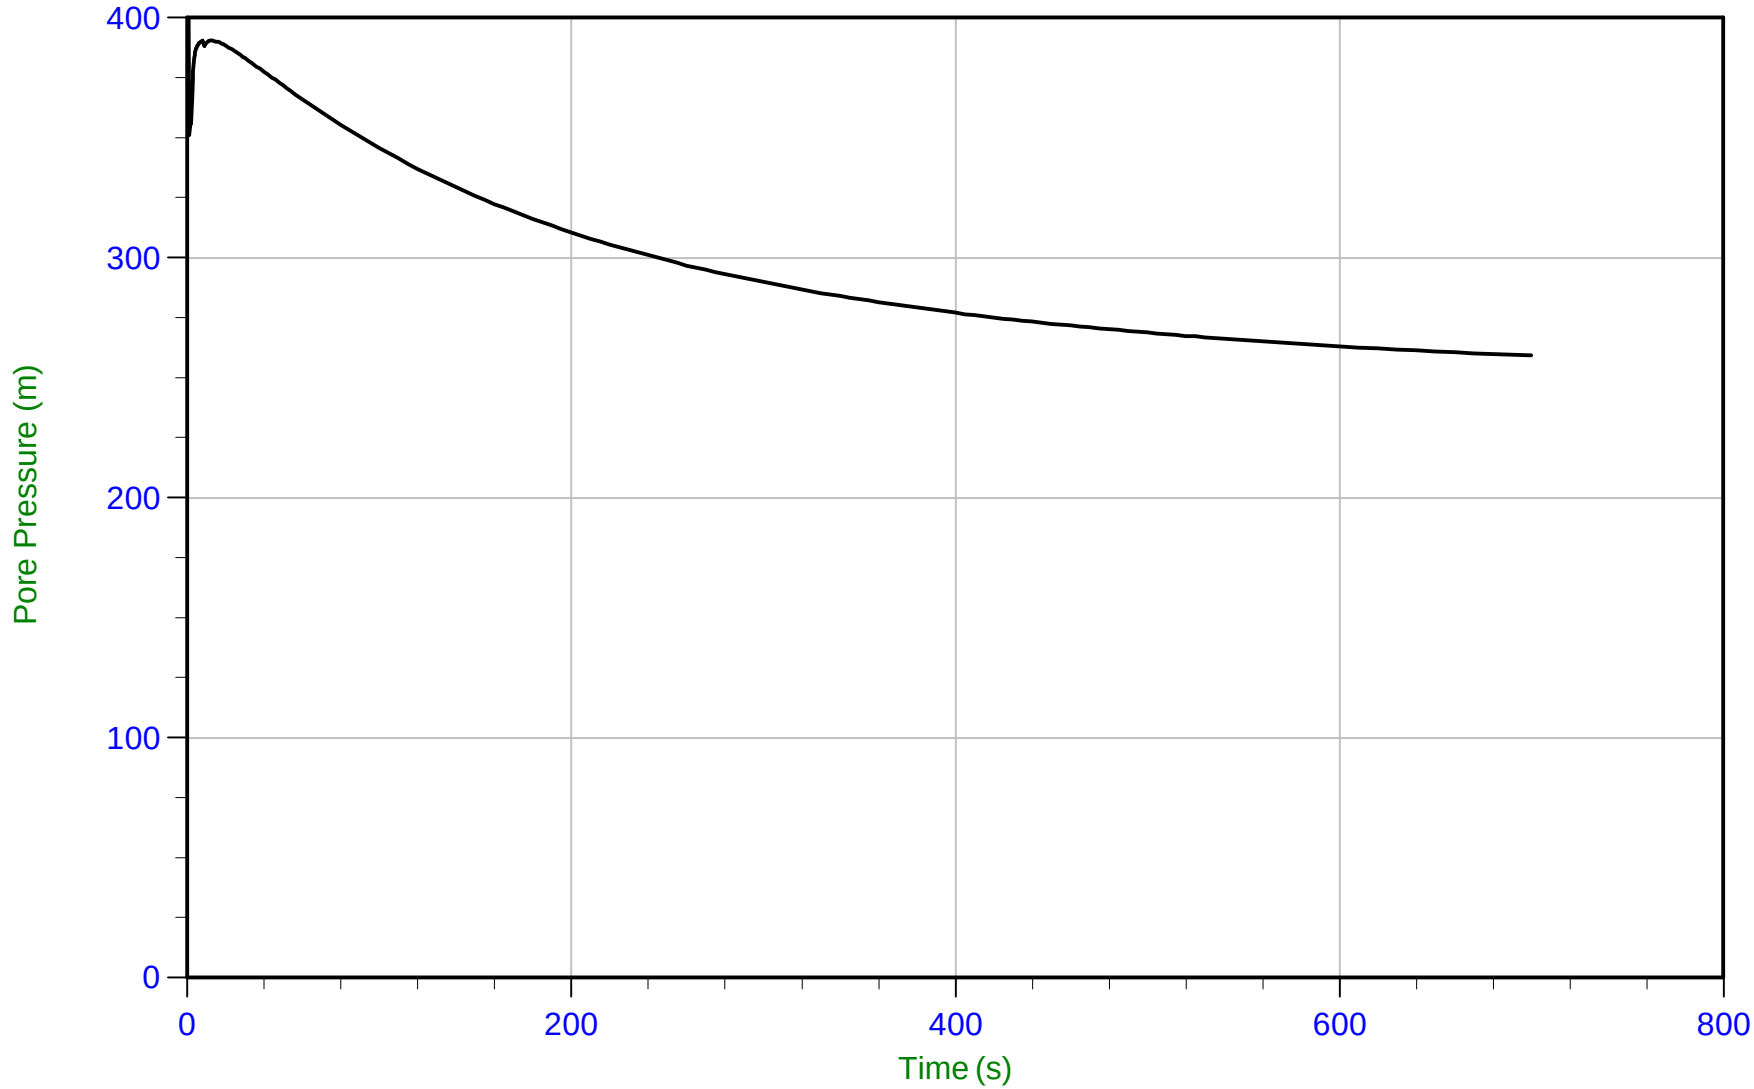

Trace Summary:

Filename: 22-02-23796_RP22-22CPT126.PPF
Depth: 9.750 m / 31.988 ft
Duration: 700.0 s


u Min: 259.2 m
u Max: 470.2 m
u Final: 259.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 11:19
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT127
Cone: 750:T1500F15U35 Area=15 cm²

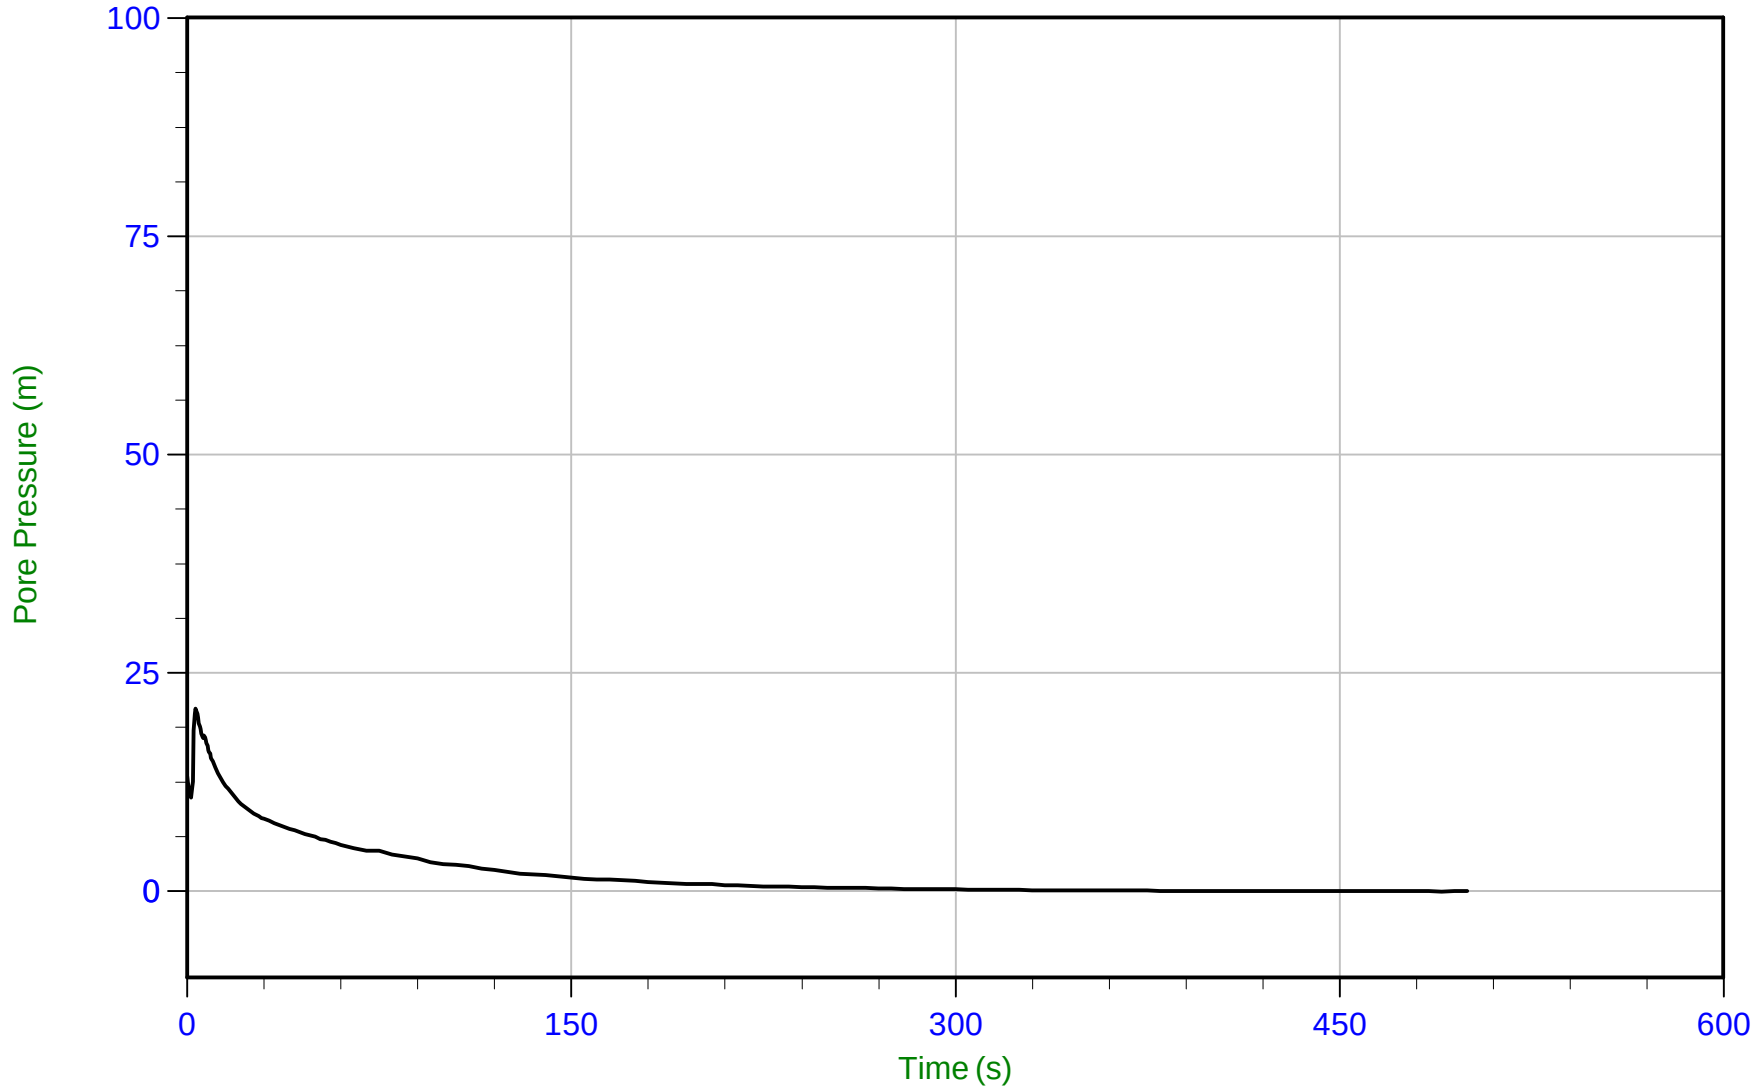

Trace Summary:

Filename: 22-02-23796_RS22-22CPT127.PPF
Depth: 3.875 m / 12.713 ft
Duration: 500.0 s

u Min: -0.1 m
u Max: 20.8 m
u Final: -0.1 m


WT: 3.875 m / 12.713 ft
Ueq: 0.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 11:19
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT127
Cone: 750:T1500F15U35 Area=15 cm²

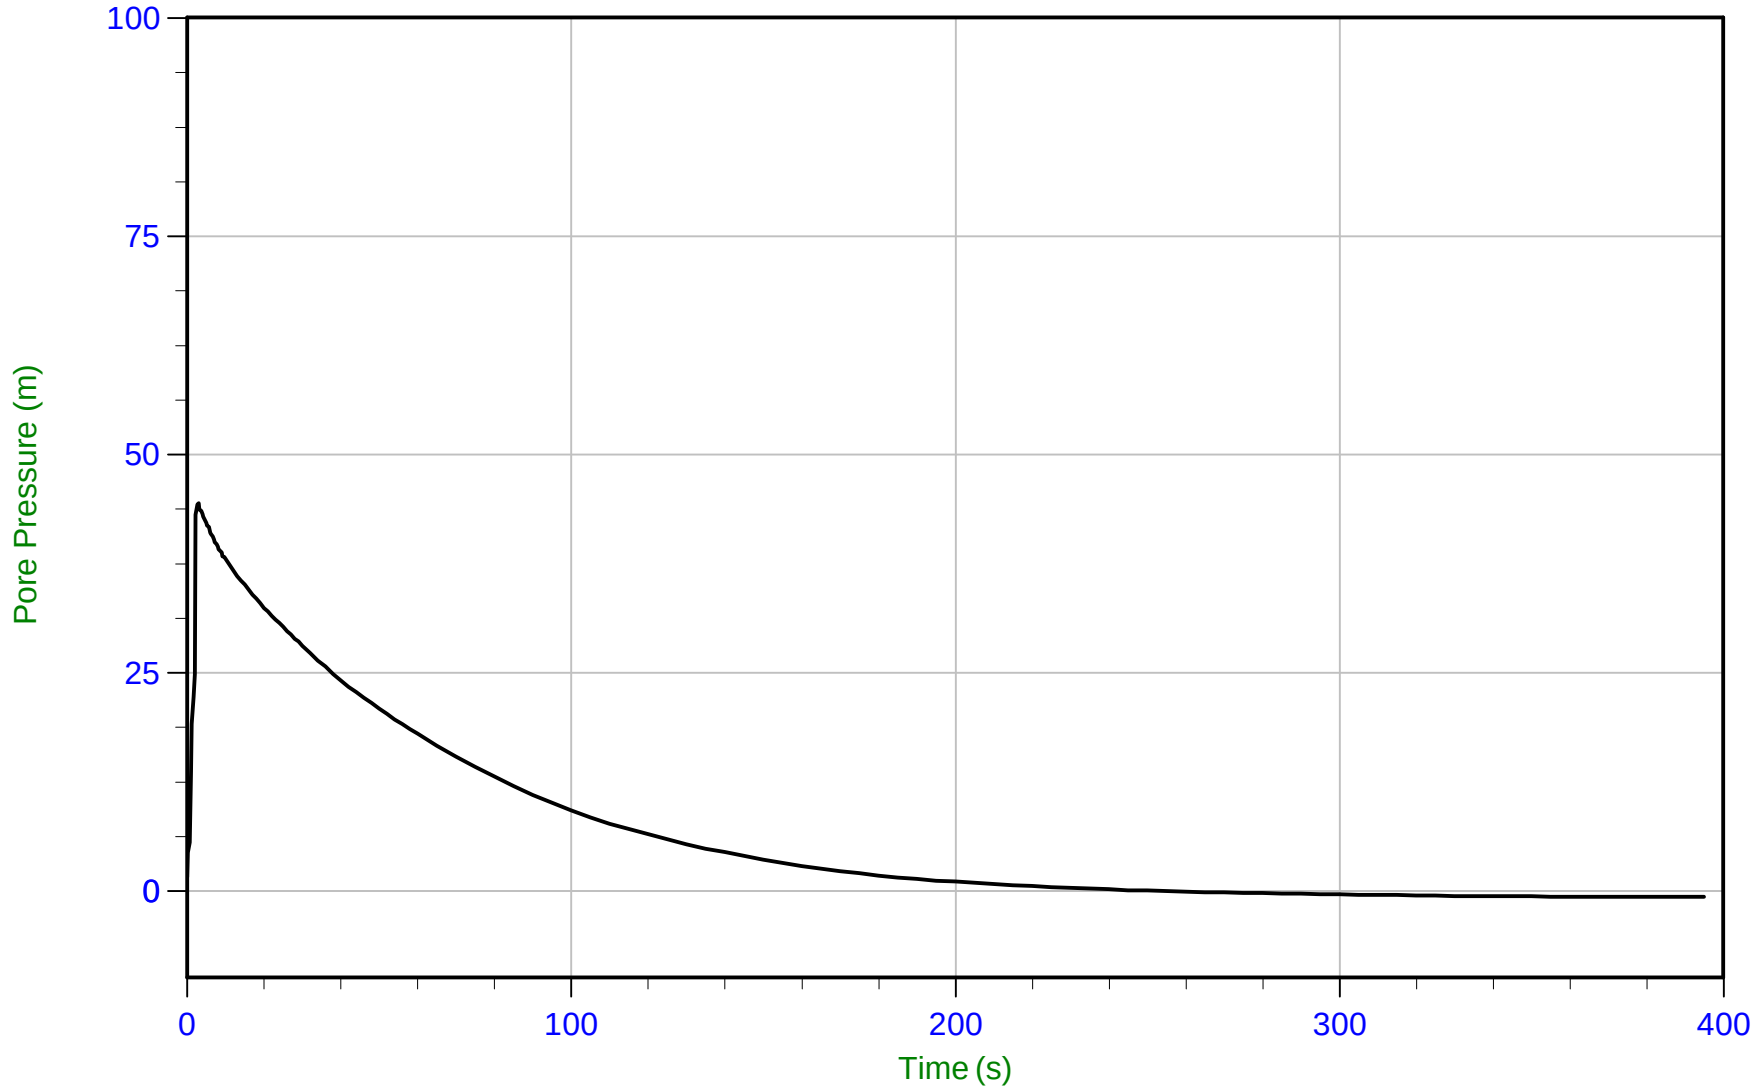

Trace Summary:

Filename: 22-02-23796_RS22-22CPT127.PPF
Depth: 6.875 m / 22.556 ft
Duration: 395.0 s

u Min: -0.7 m
u Max: 44.3 m
u Final: -0.7 m


WT: 6.875 m / 22.556 ft
Ueq: 0.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 09:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT128
Cone: 750:T1500F15U35 Area=15 cm²

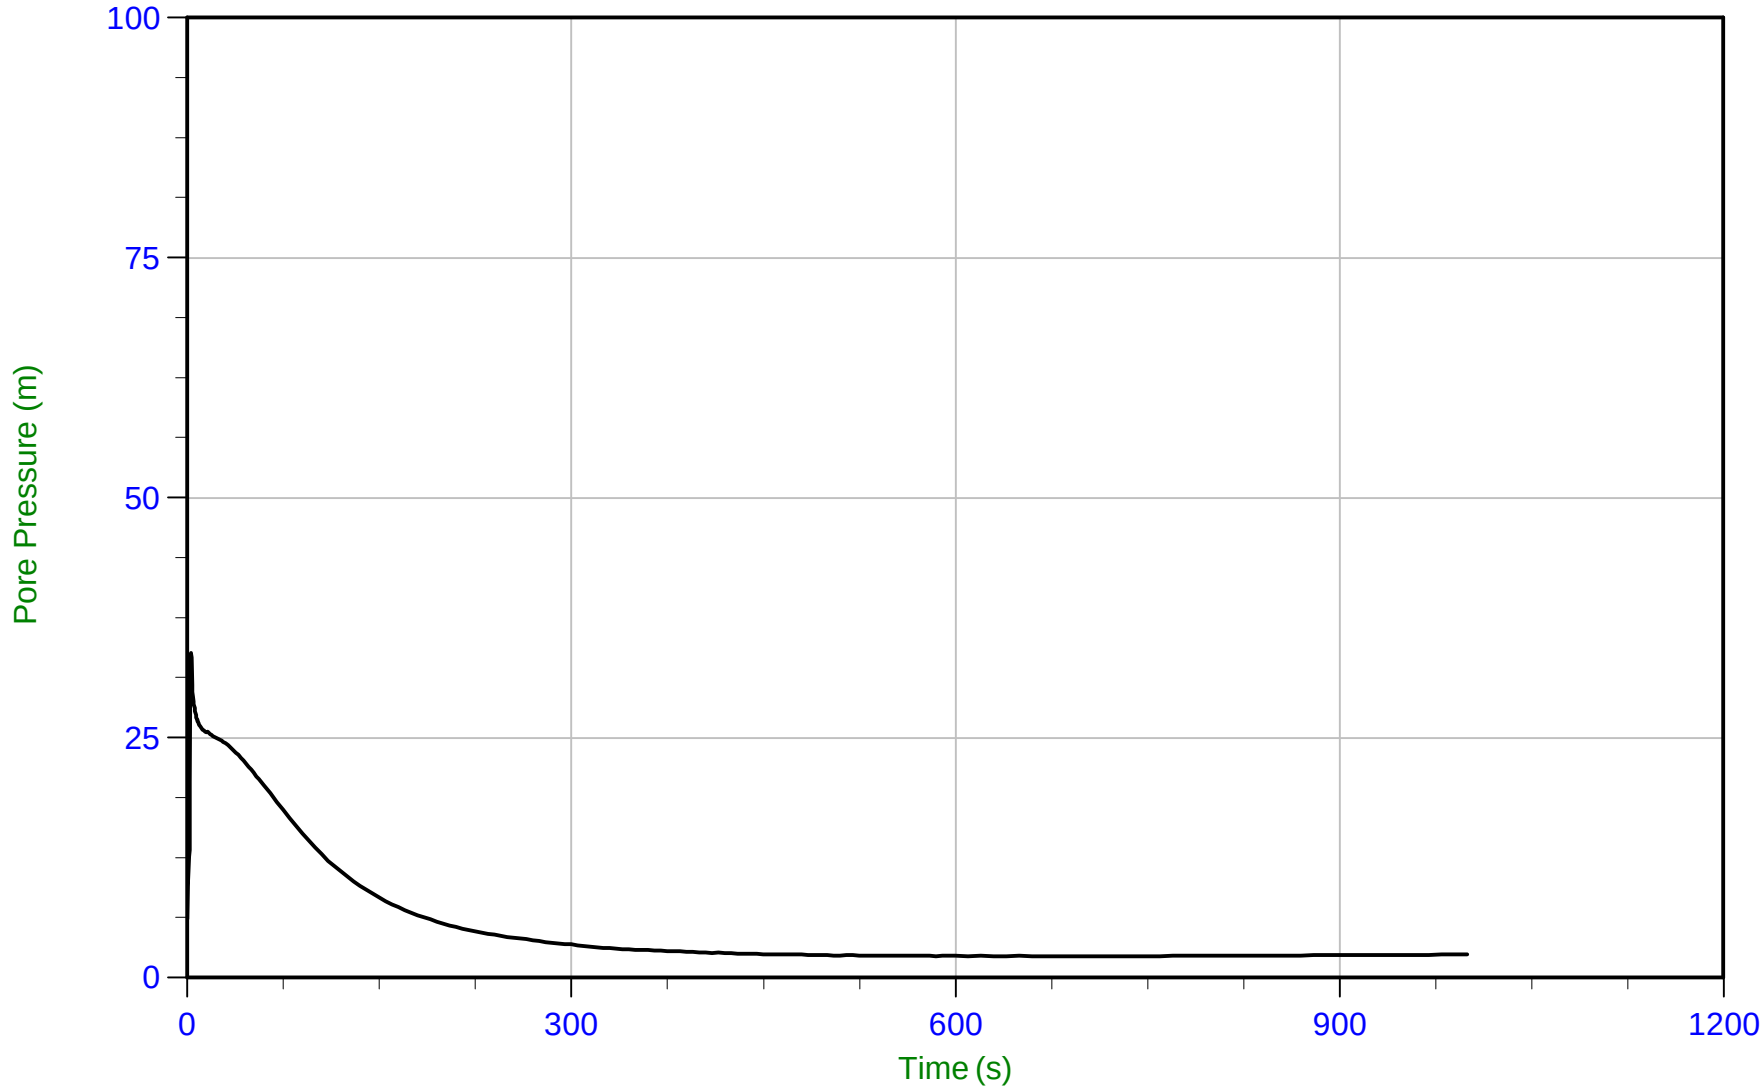

Trace Summary:

Filename: 22-02-23796_RP22-22CPT128.PPF
Depth: 5.850 m / 19.193 ft
Duration: 1000.0 s

u Min: 2.2 m
u Max: 33.8 m
u Final: 2.4 m


WT: 3.450 m / 11.319 ft
Ueq: 2.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/14/2022 08:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT129
Cone: 821:T1000F10U35 Area=15 cm²

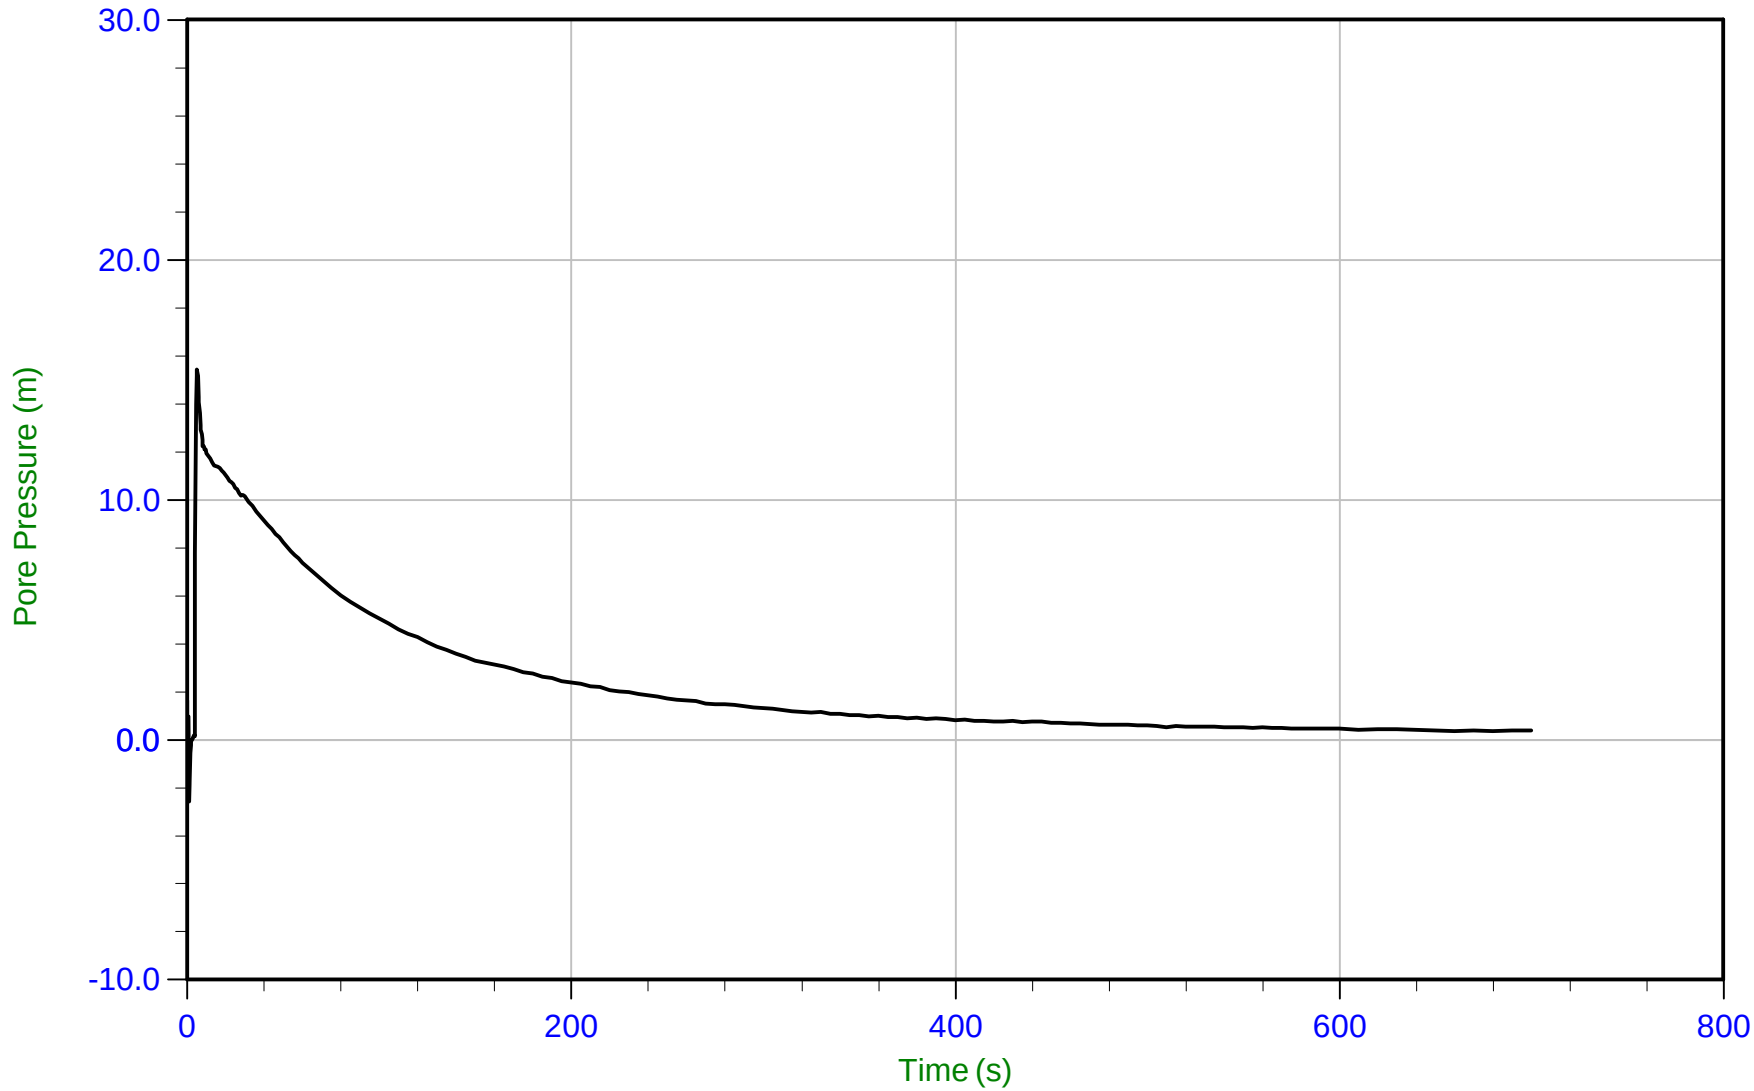

Trace Summary:

Filename: 22-02-23796_RP22-22CPT129.PPF
Depth: 3.825 m / 12.549 ft
Duration: 700.0 s


u Min: -2.6 m
u Max: 15.4 m
u Final: 0.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 16:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT130
Cone: 821:T1000F10U35 Area=15 cm²

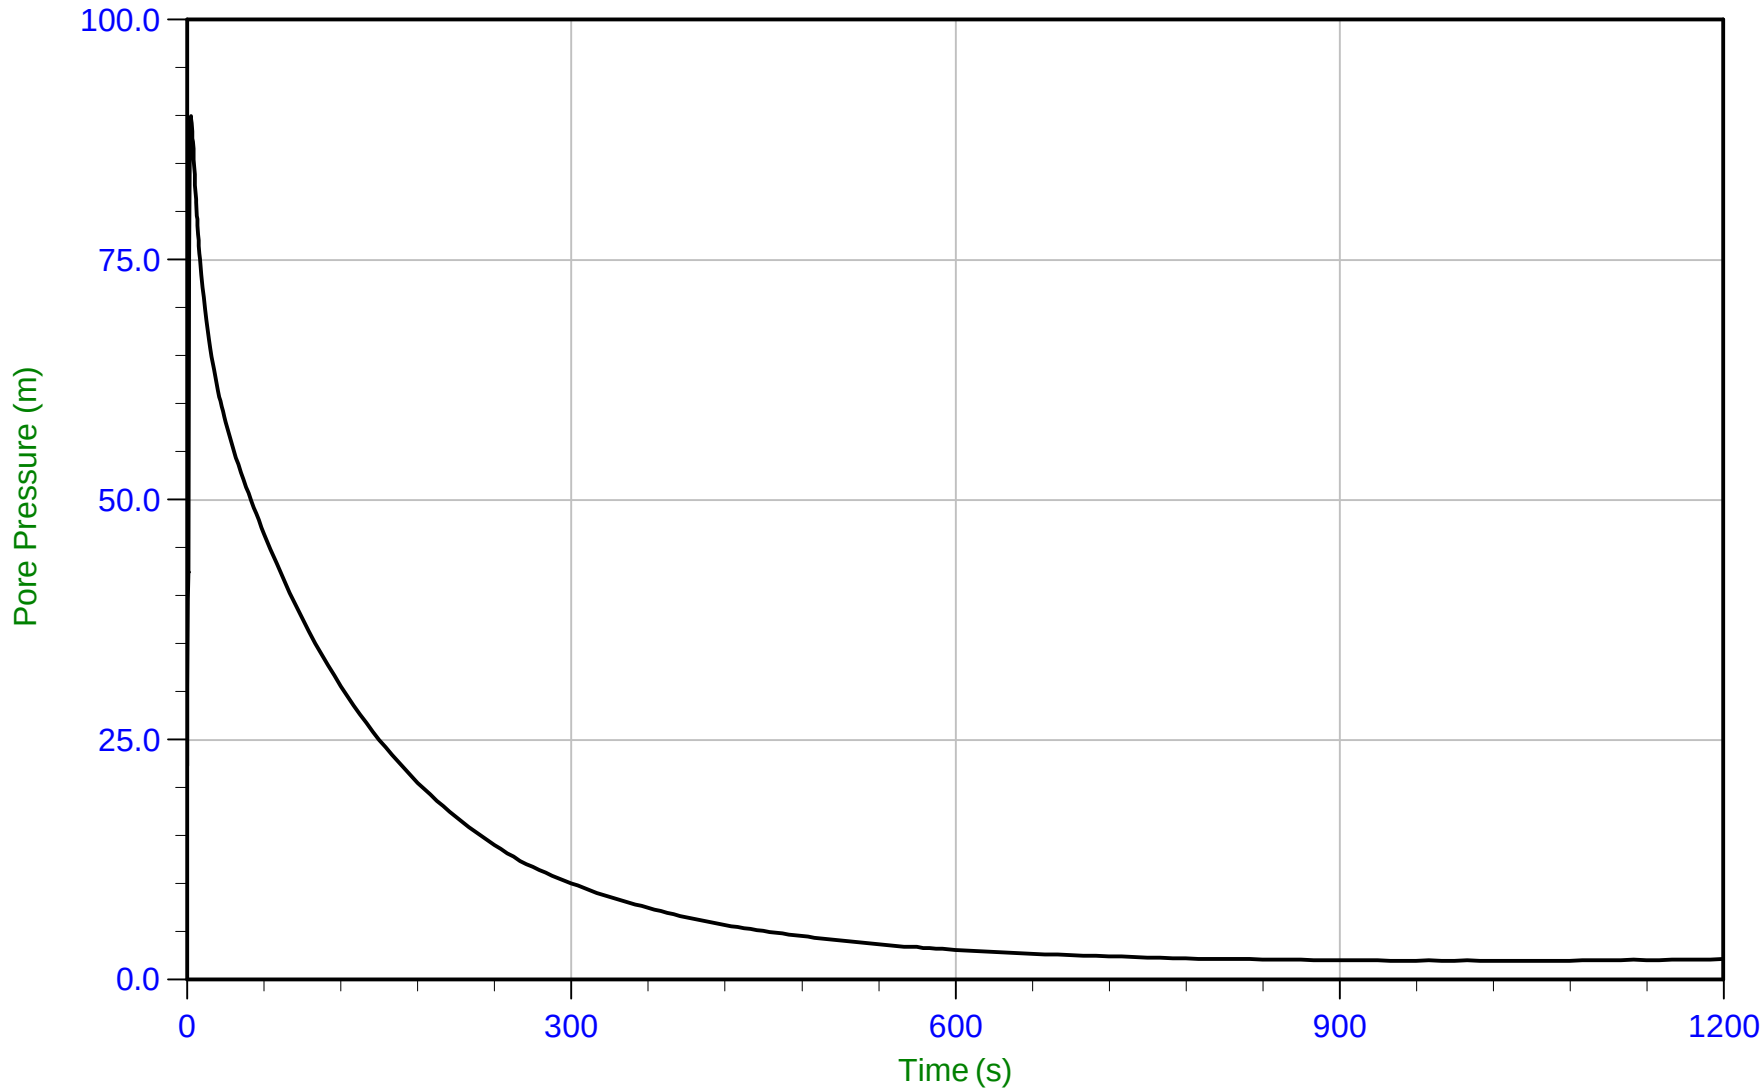

Trace Summary:

Filename: 22-02-23796_RP22-22CPT130.PPF
Depth: 6.825 m / 22.391 ft
Duration: 1200.0 s


u Min: 2.0 m
u Max: 89.9 m
u Final: 2.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 14:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT131
Cone: 750:T1500F15U35 Area=15 cm²

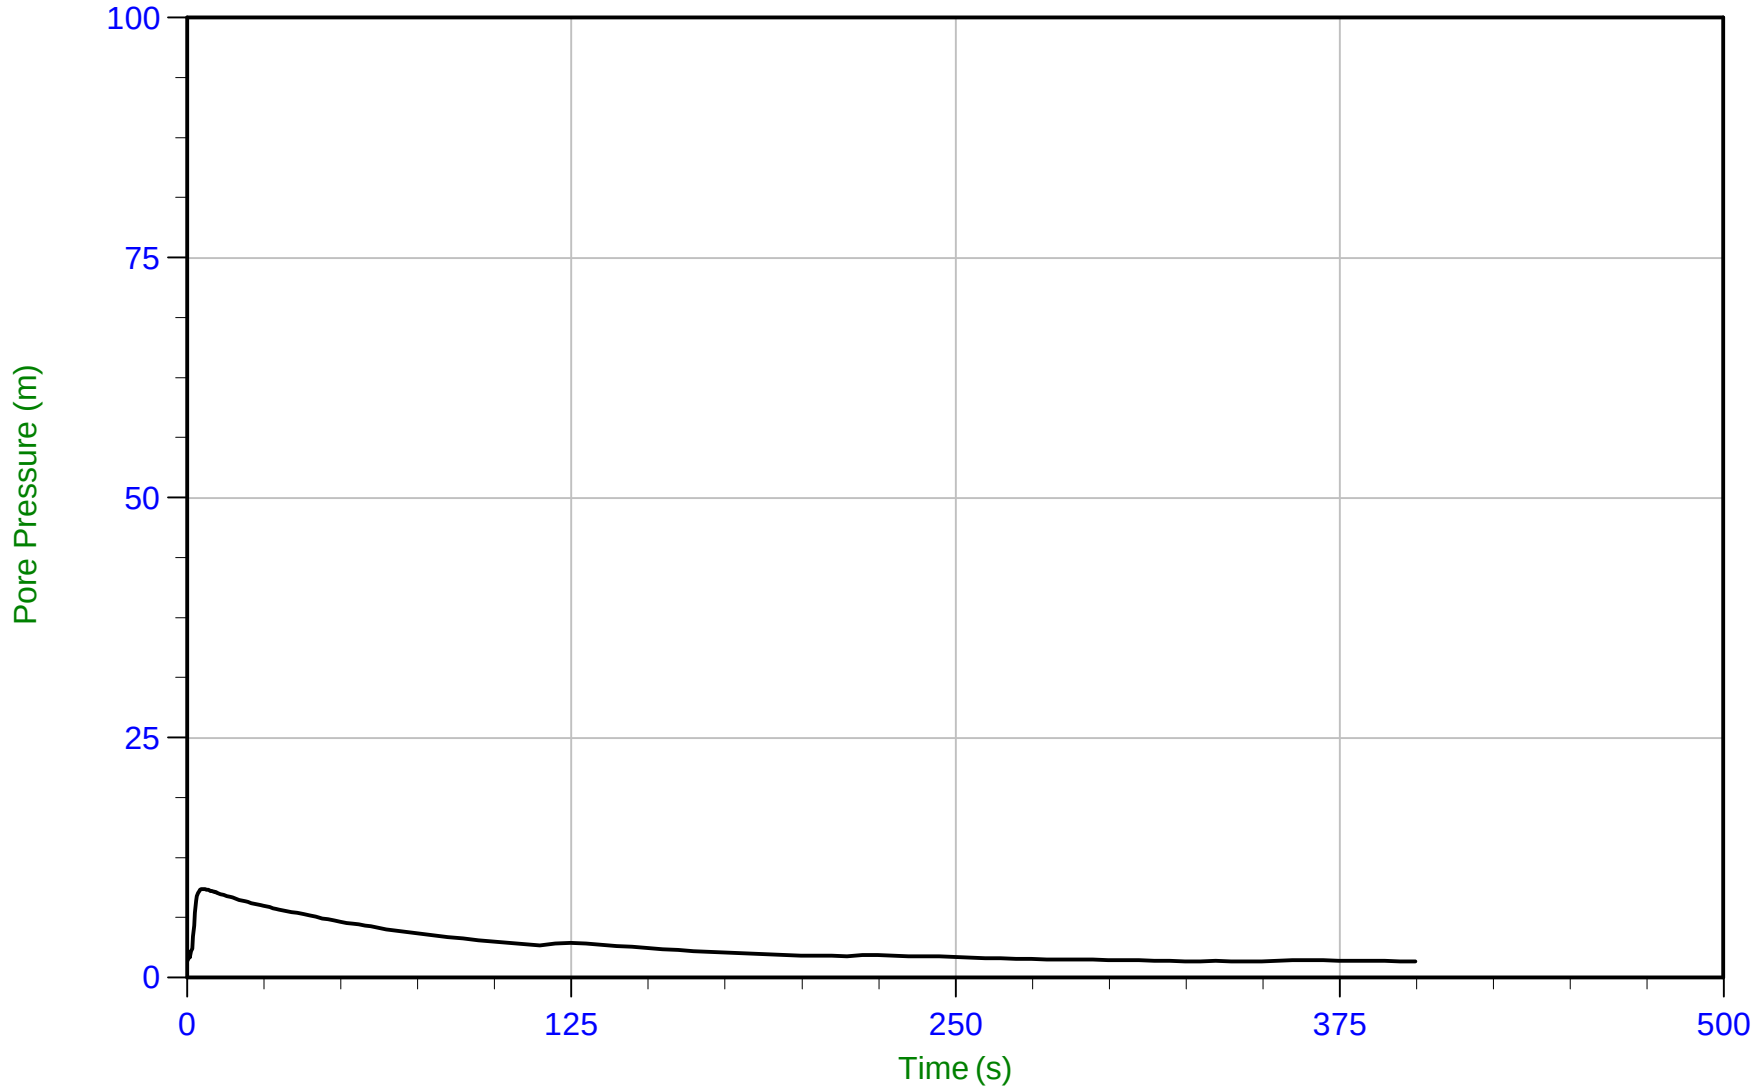

Trace Summary:

Filename: 22-02-23796_RP22-22CPT131.PPF
Depth: 5.775 m / 18.947 ft
Duration: 400.0 s

u Min: 1.7 m
u Max: 9.2 m
u Final: 1.7 m


WT: 4.075 m / 13.369 ft
Ueq: 1.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/15/2022 09:17
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT131N
Cone: 822:T1000F10U35 Area=15 cm²

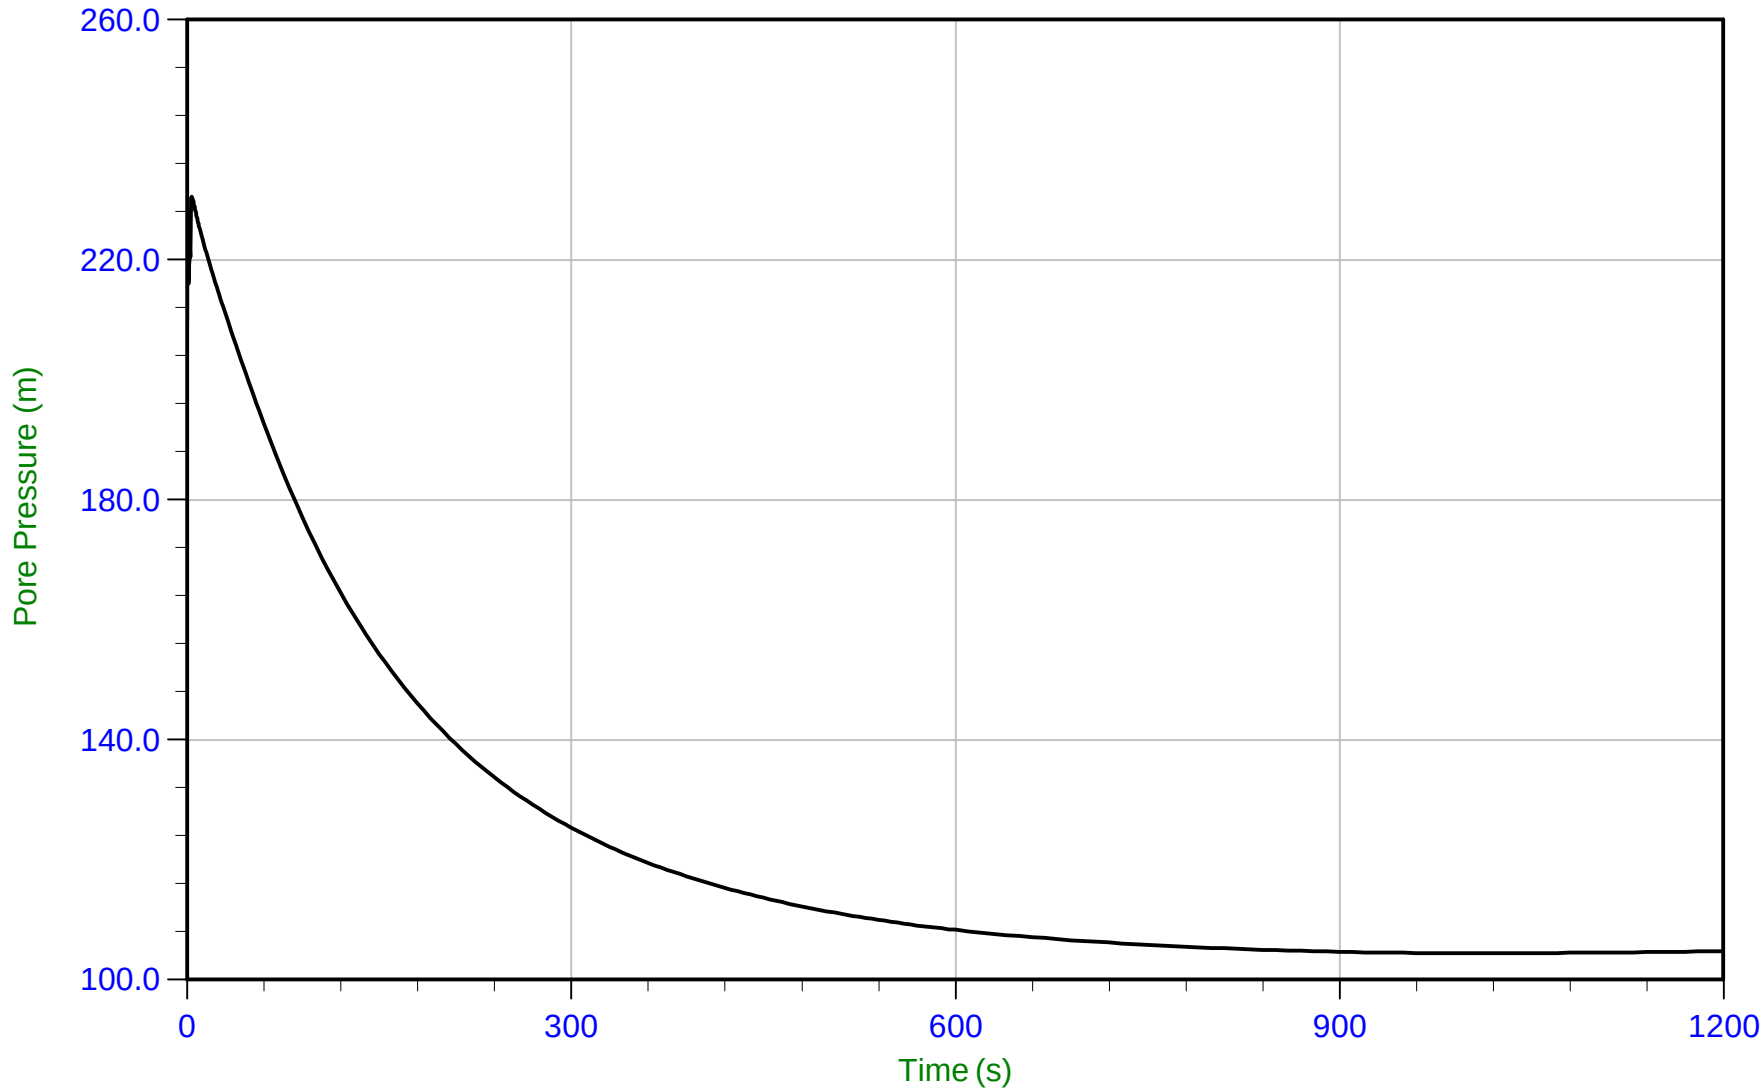

Trace Summary:

Filename: 22-02-23796_RS22-22CPT131N.PPF
Depth: 8.850 m / 29.035 ft
Duration: 1200.0 s


u Min: 104.4 m
u Max: 230.5 m
u Final: 104.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 16:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT132
Cone: 750:T1500F15U35 Area=15 cm²

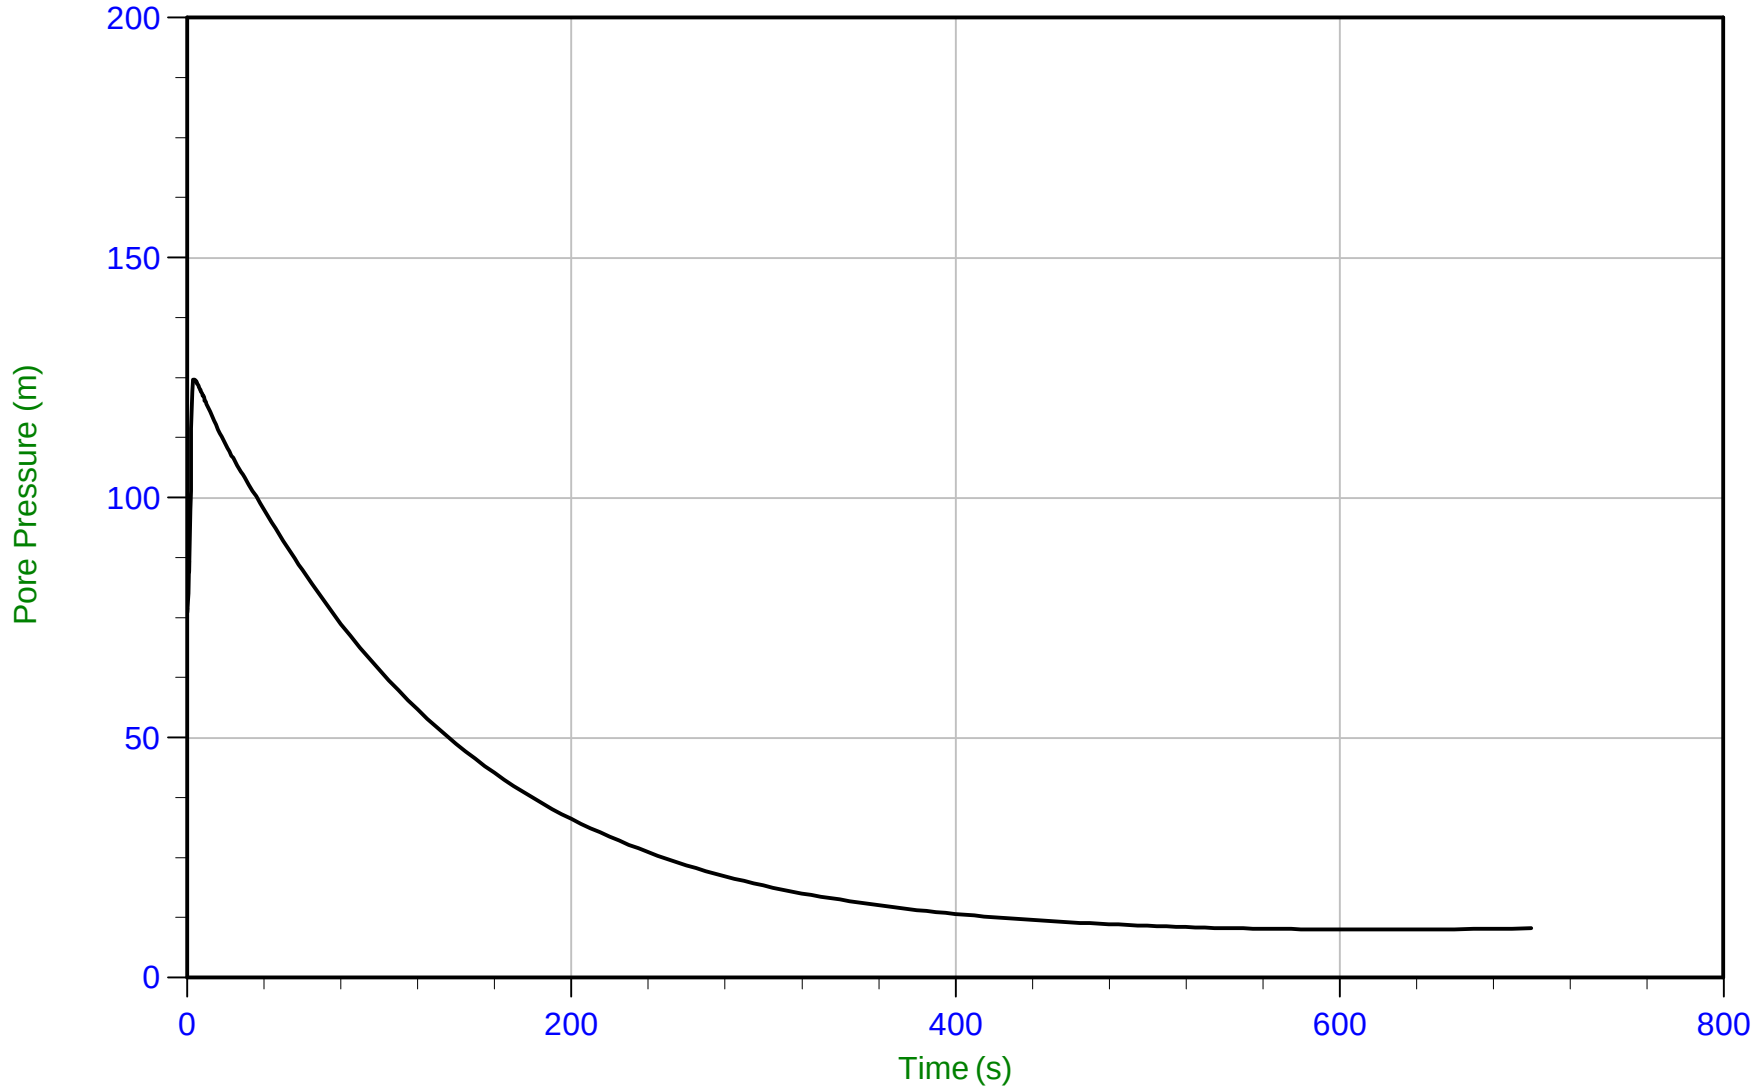

Trace Summary:

Filename: 22-02-23796_RP22-22CPT132.PPF
Depth: 7.825 m / 25.672 ft
Duration: 700.0 s

u Min: 10.0 m
u Max: 124.6 m
u Final: 10.3 m

WT: 2.700 m / 8.858 ft
Ueq: 5.1 m
U(50): 64.89 m


T(50): 94.7 s
Ir: 100
Ch: 7.4 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 07:06
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT133
Cone: 750:T1500F15U35 Area=15 cm²

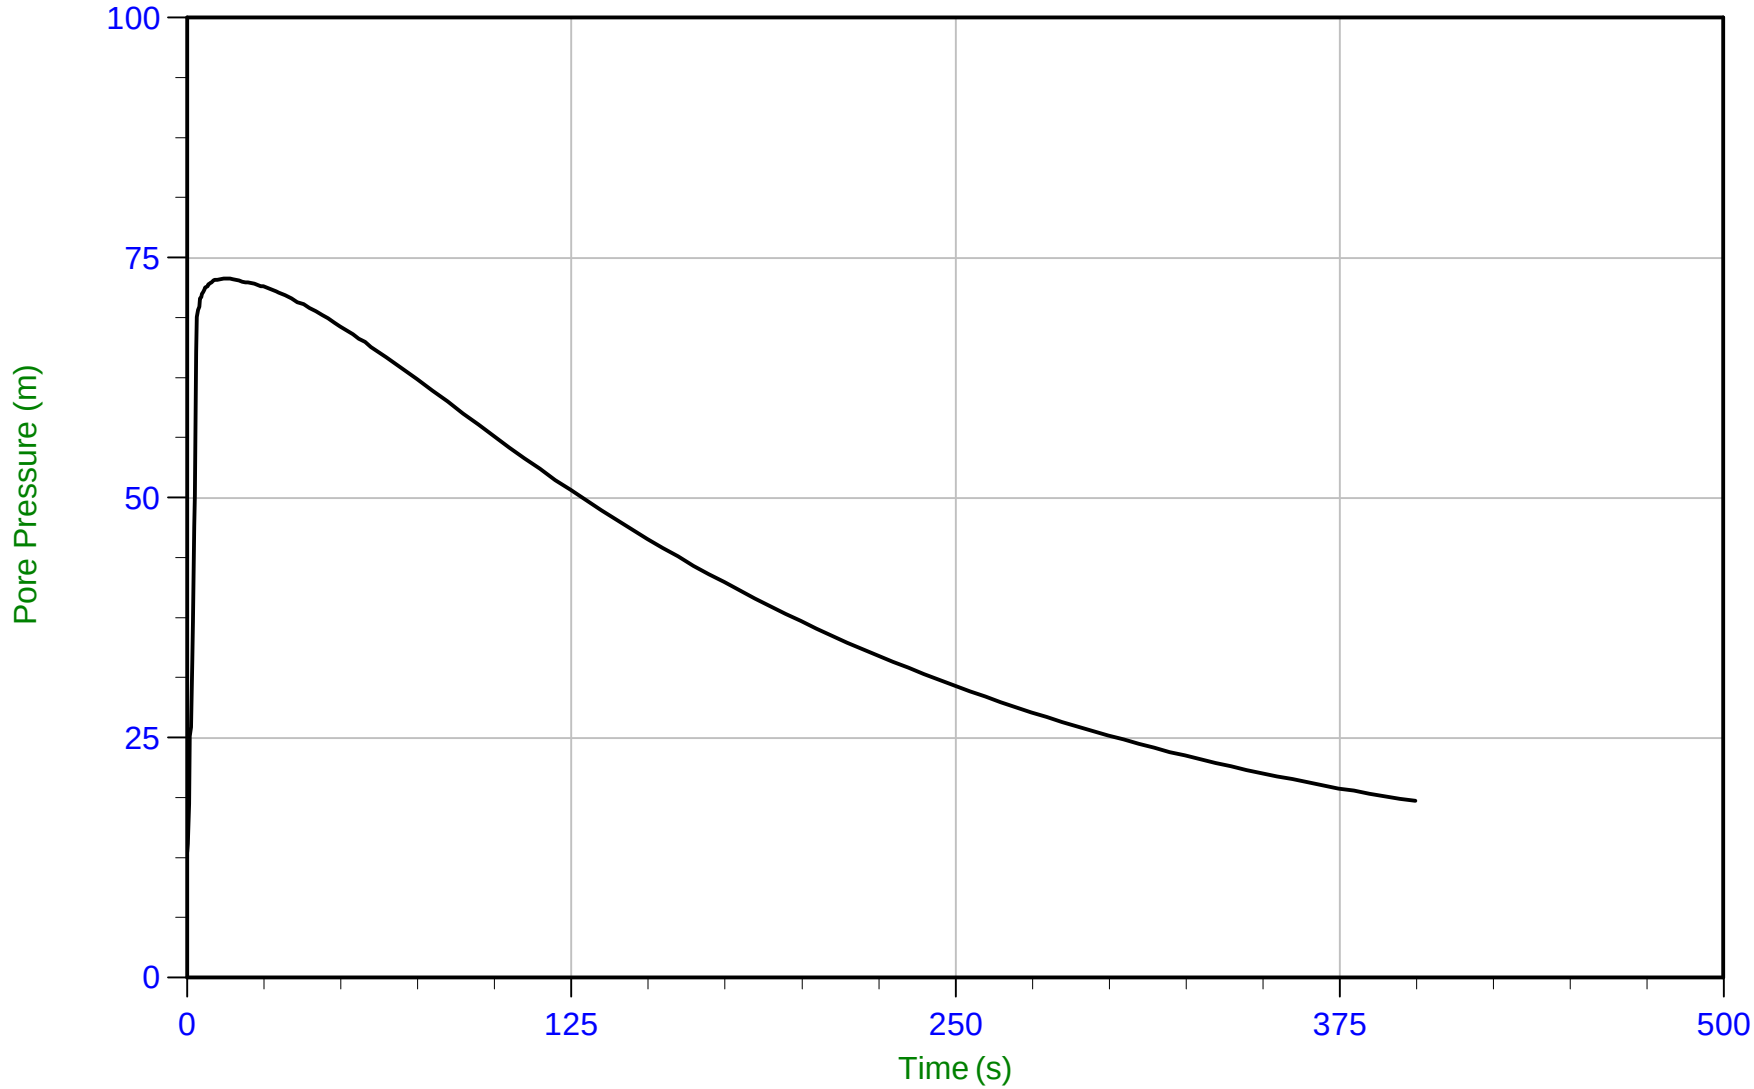

Trace Summary:

Filename: 22-02-23796_RS22-22CPT133.PPF
Depth: 4.825 m / 15.830 ft
Duration: 400.0 s


u Min: 13.1 m
u Max: 72.8 m
u Final: 18.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 07:06
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT133
Cone: 750:T1500F15U35 Area=15 cm²

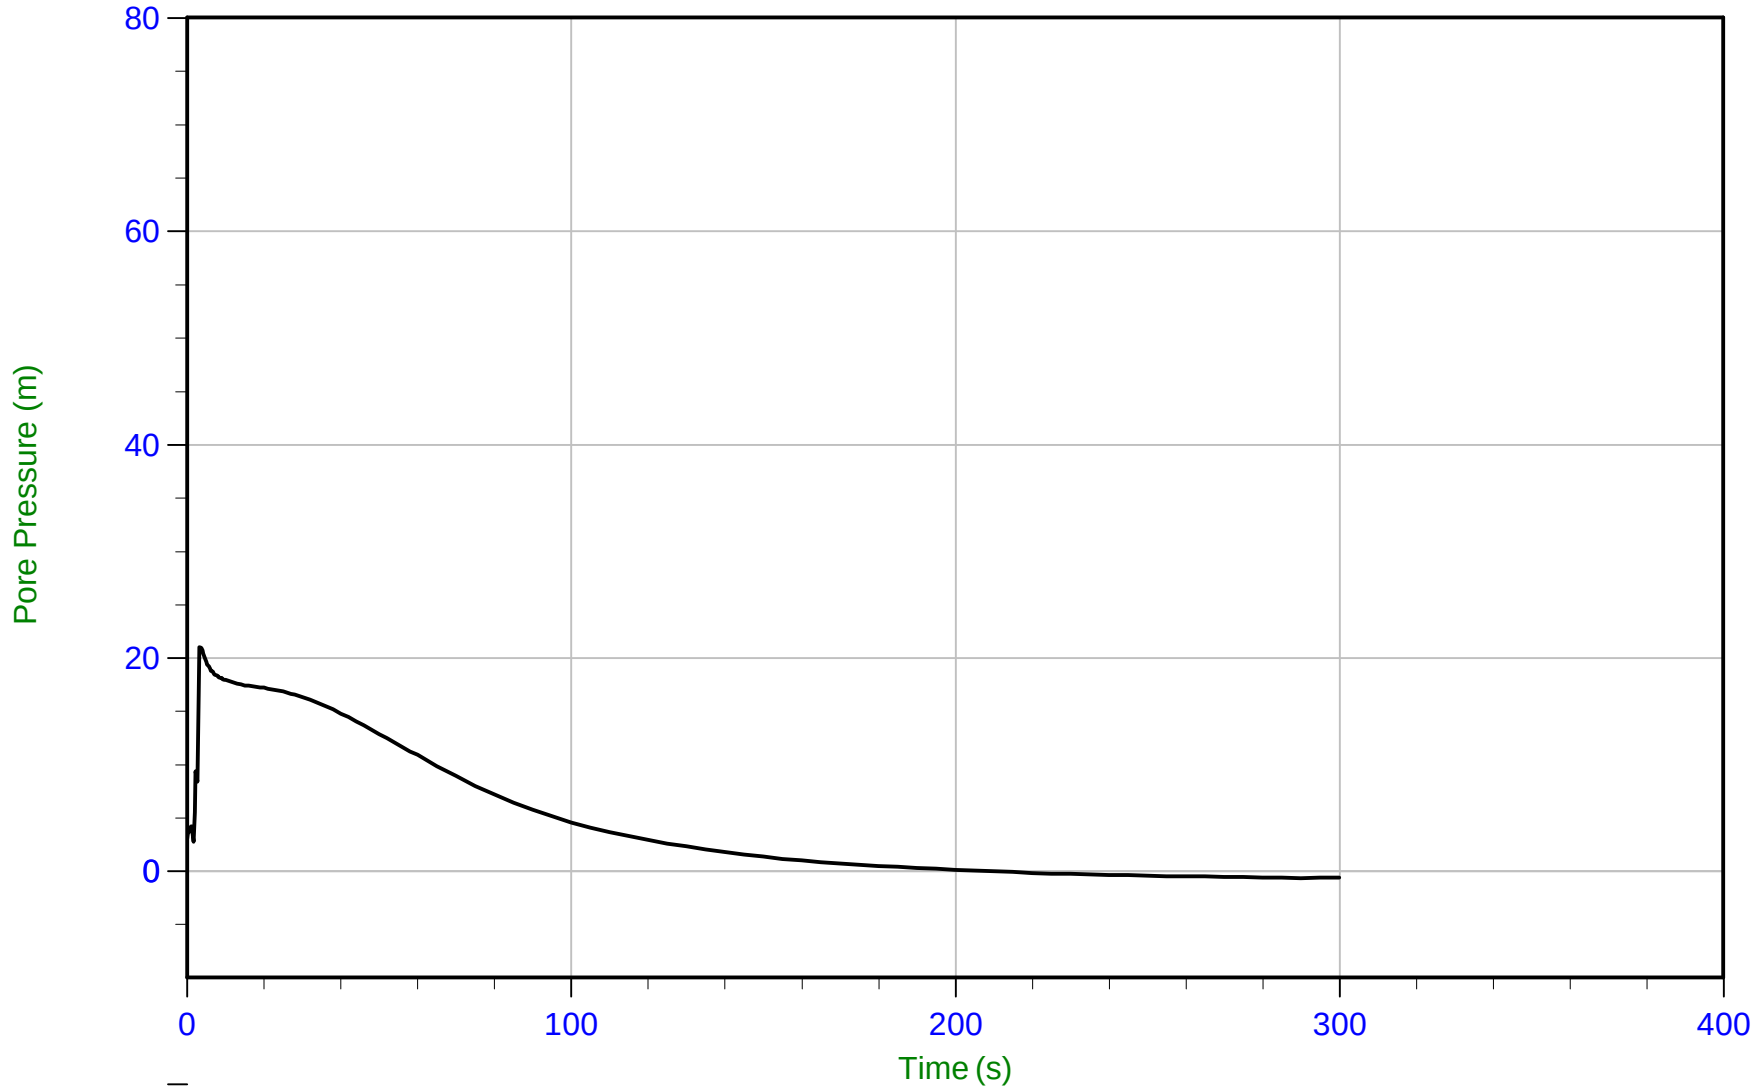

Trace Summary:

Filename: 22-02-23796_RS22-22CPT133.PPF
Depth: 6.825 m / 22.391 ft
Duration: 300.0 s


u Min: -0.6 m
u Max: 21.0 m
u Final: -0.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 08:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT134
Cone: 750:T1500F15U35 Area=15 cm²

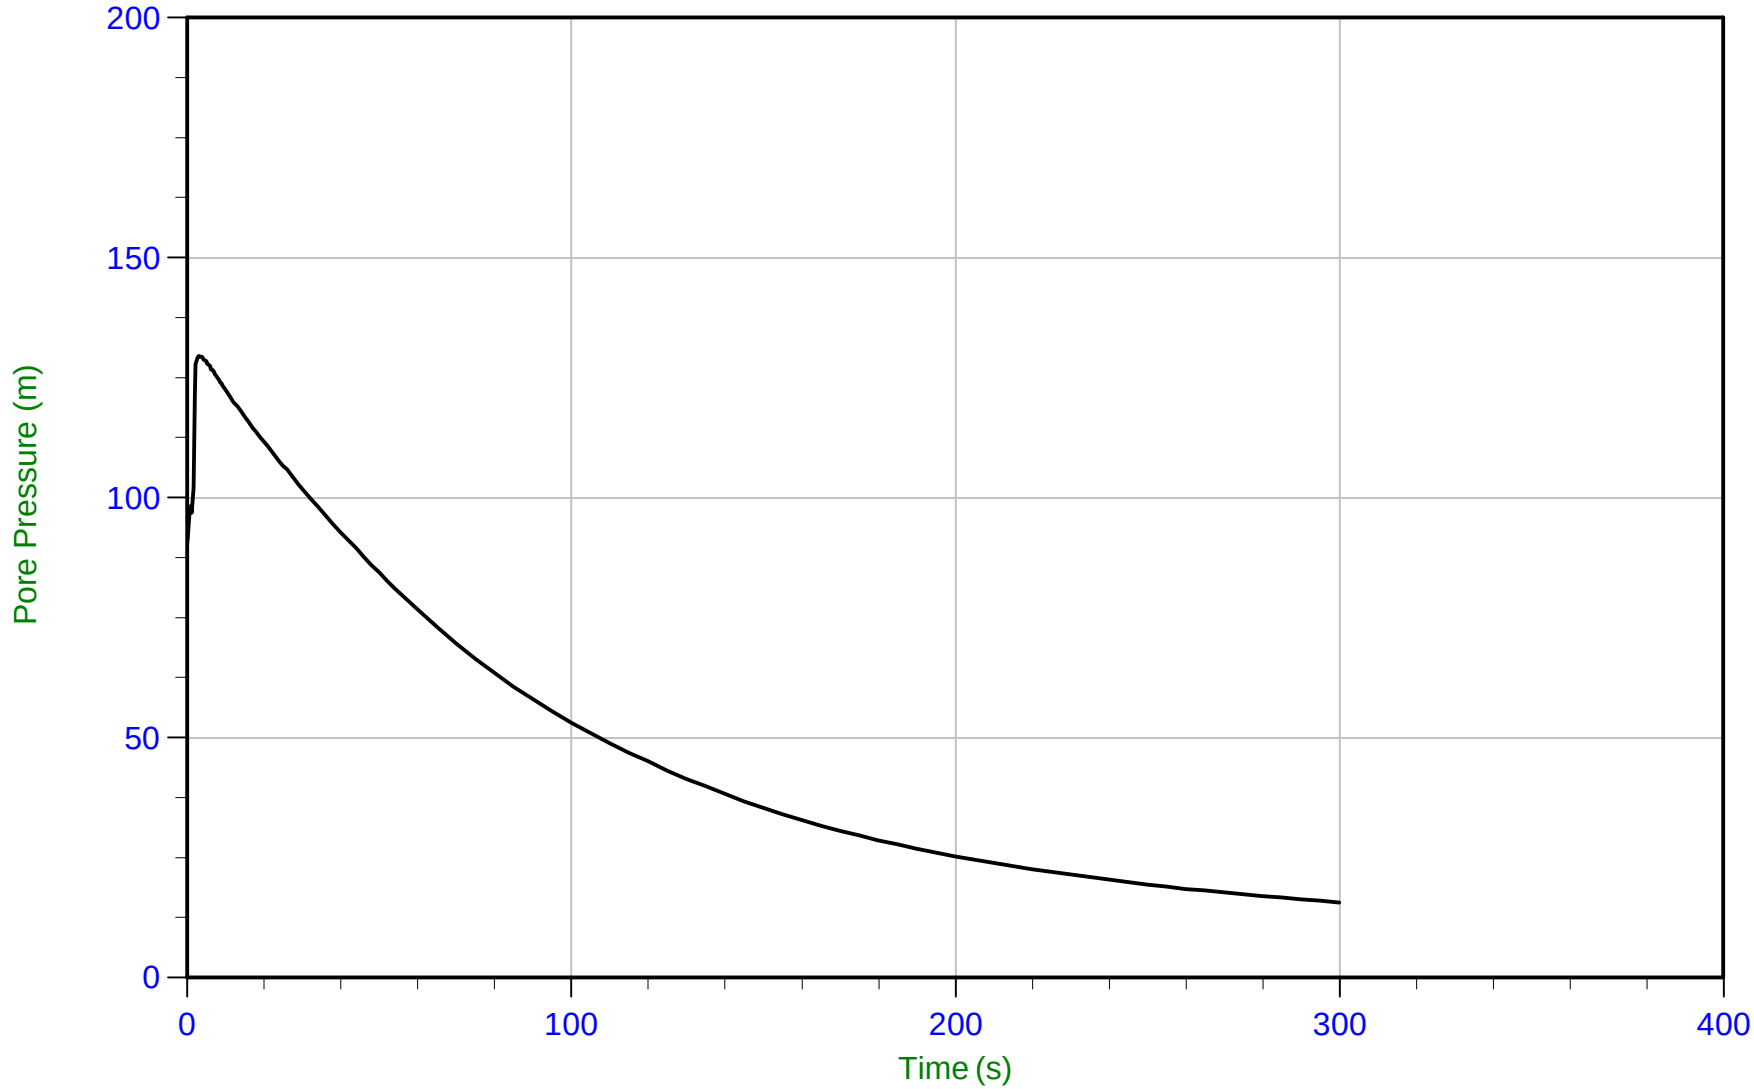

Trace Summary:

Filename: 22-02-23796_RP22-22CPT134.PPF
Depth: 6.775 m / 22.227 ft
Duration: 300.0 s


u Min: 15.7 m
u Max: 129.6 m
u Final: 15.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 08:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT134
Cone: 750:T1500F15U35 Area=15 cm²

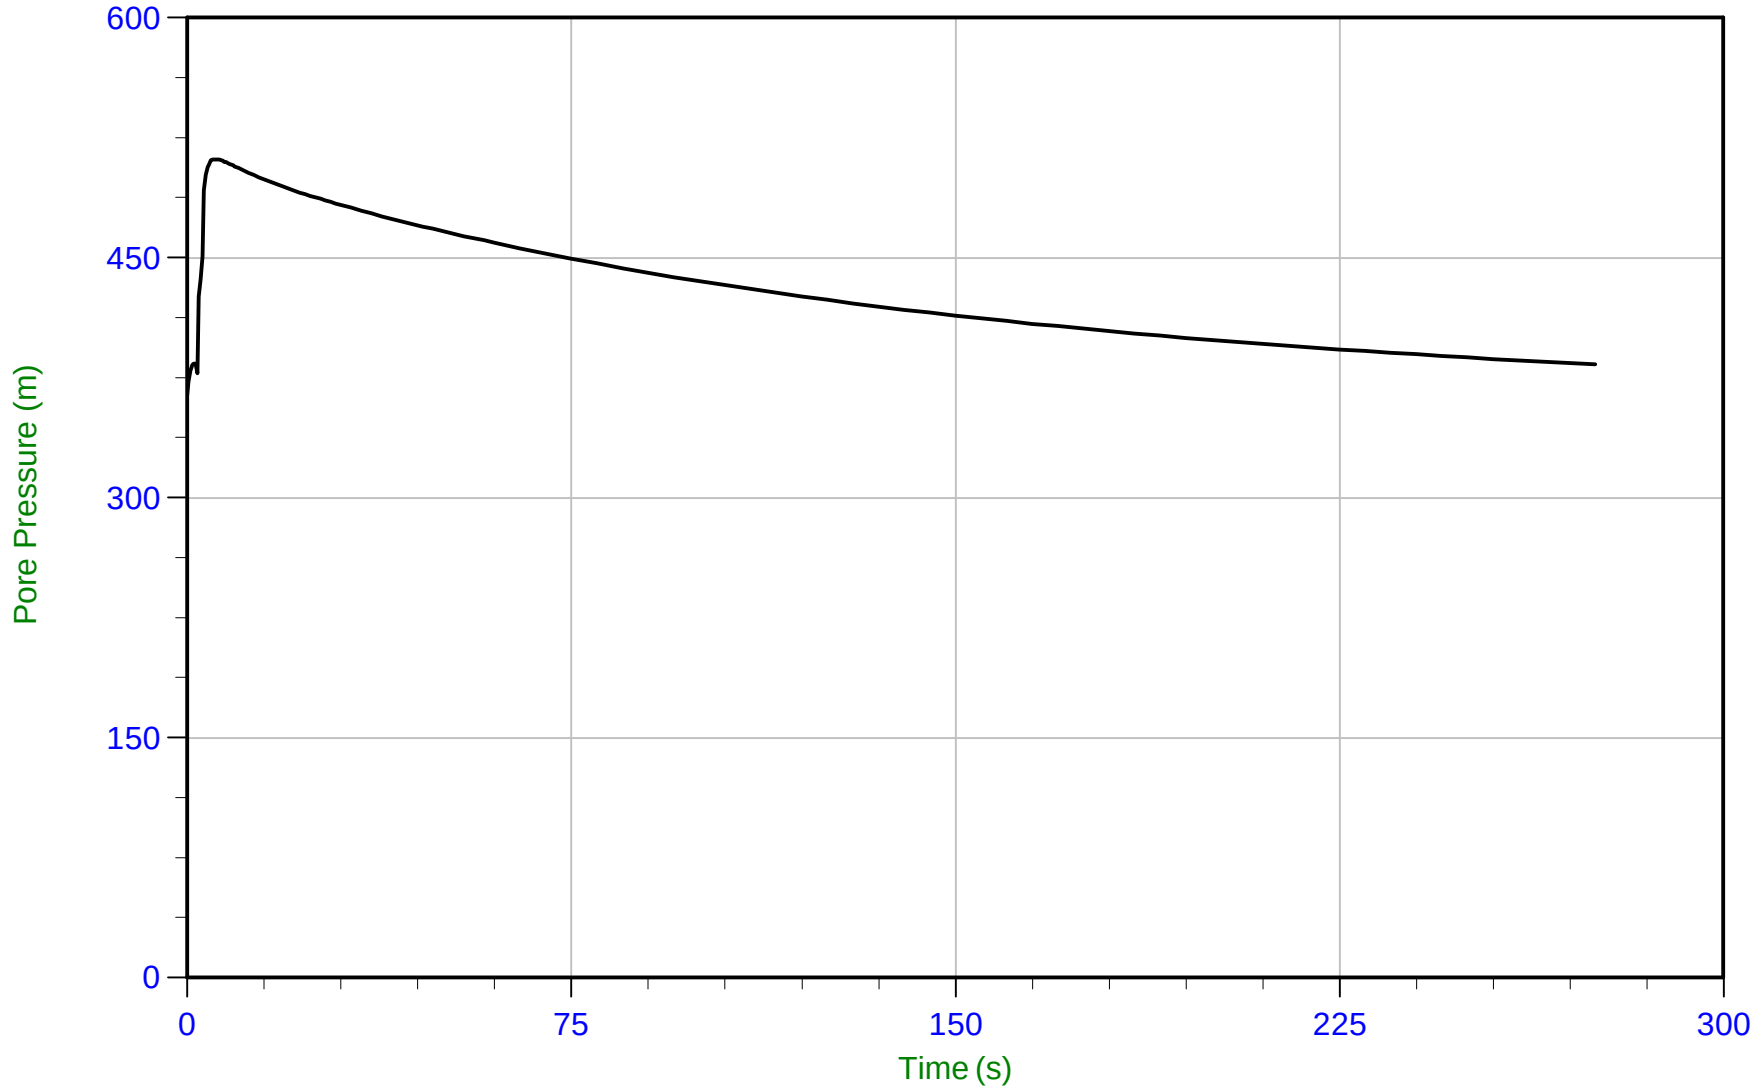

Trace Summary:

Filename: 22-02-23796_RP22-22CPT134.PPF
Depth: 9.925 m / 32.562 ft
Duration: 275.0 s


u Min: 364.2 m
u Max: 511.5 m
u Final: 383.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 10:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT135
Cone: 750:T1500F15U35 Area=15 cm²

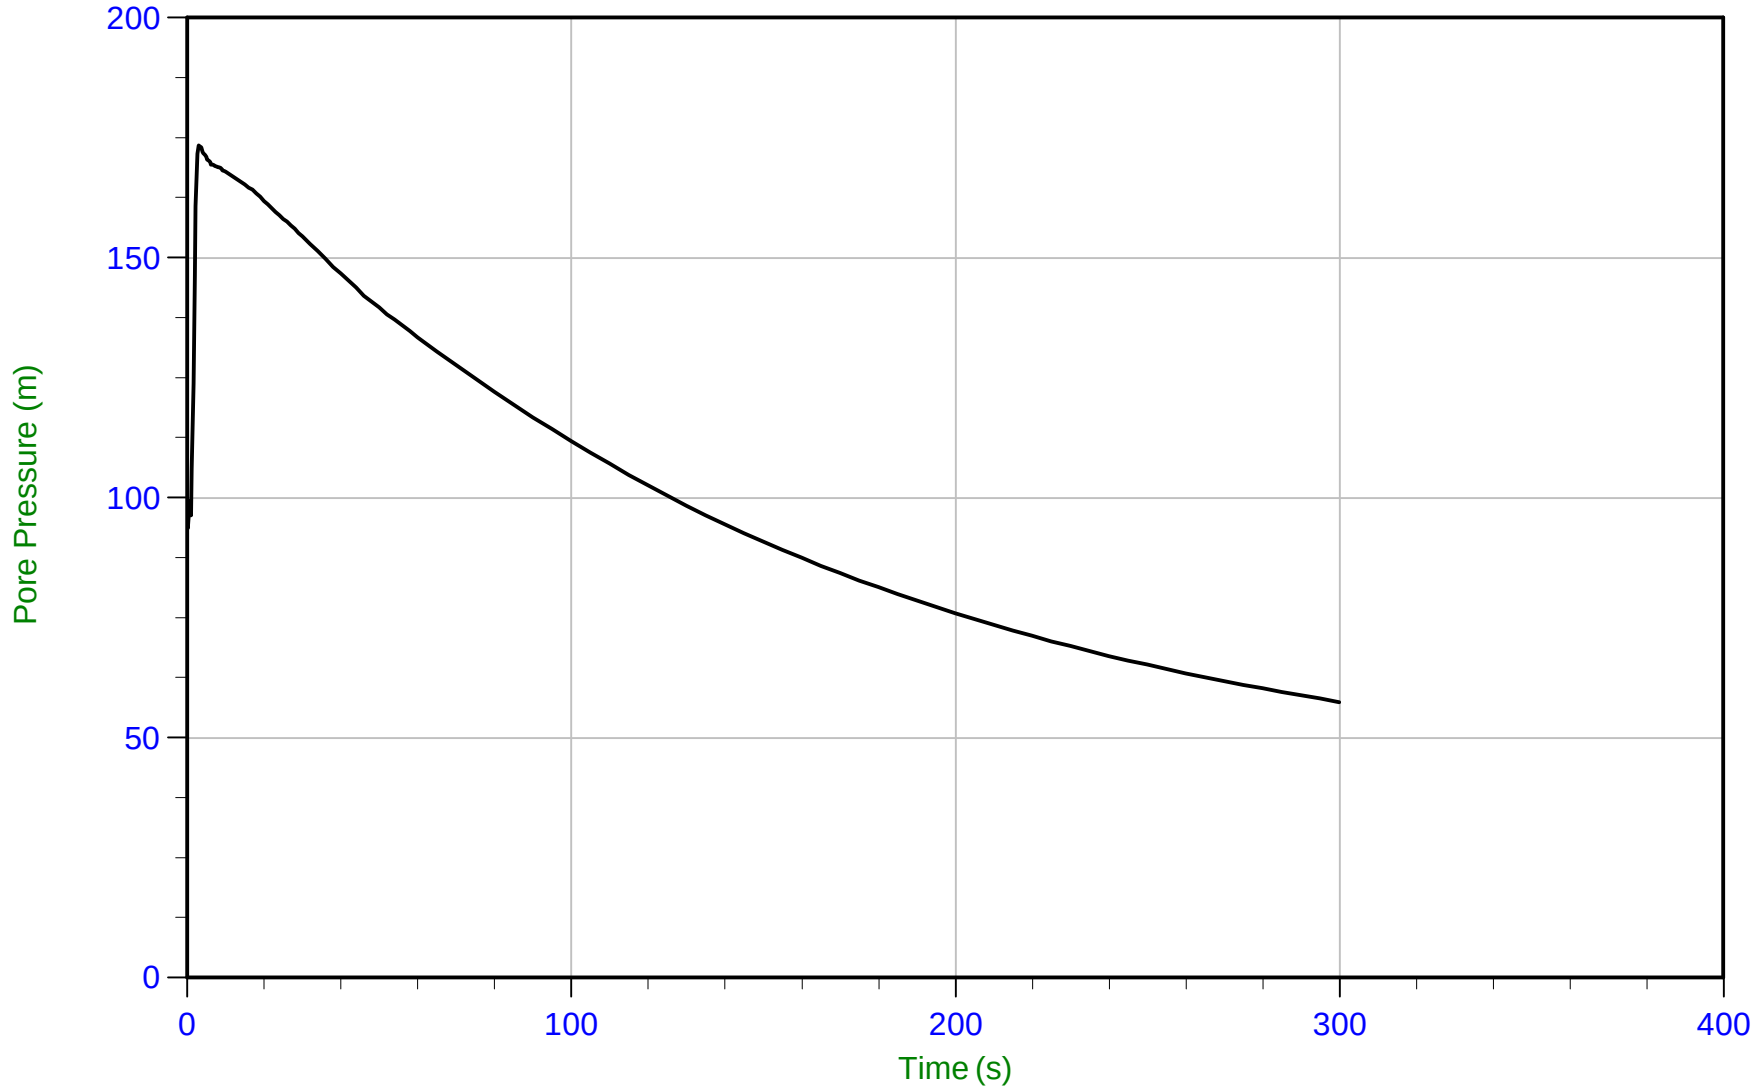

Trace Summary:

Filename: 22-02-23796_RP22-22CPT135.PPF
Depth: 8.250 m / 27.067 ft
Duration: 300.0 s


u Min: 57.4 m
u Max: 173.4 m
u Final: 57.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 11:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT136
Cone: 750:T1500F15U35 Area=15 cm²

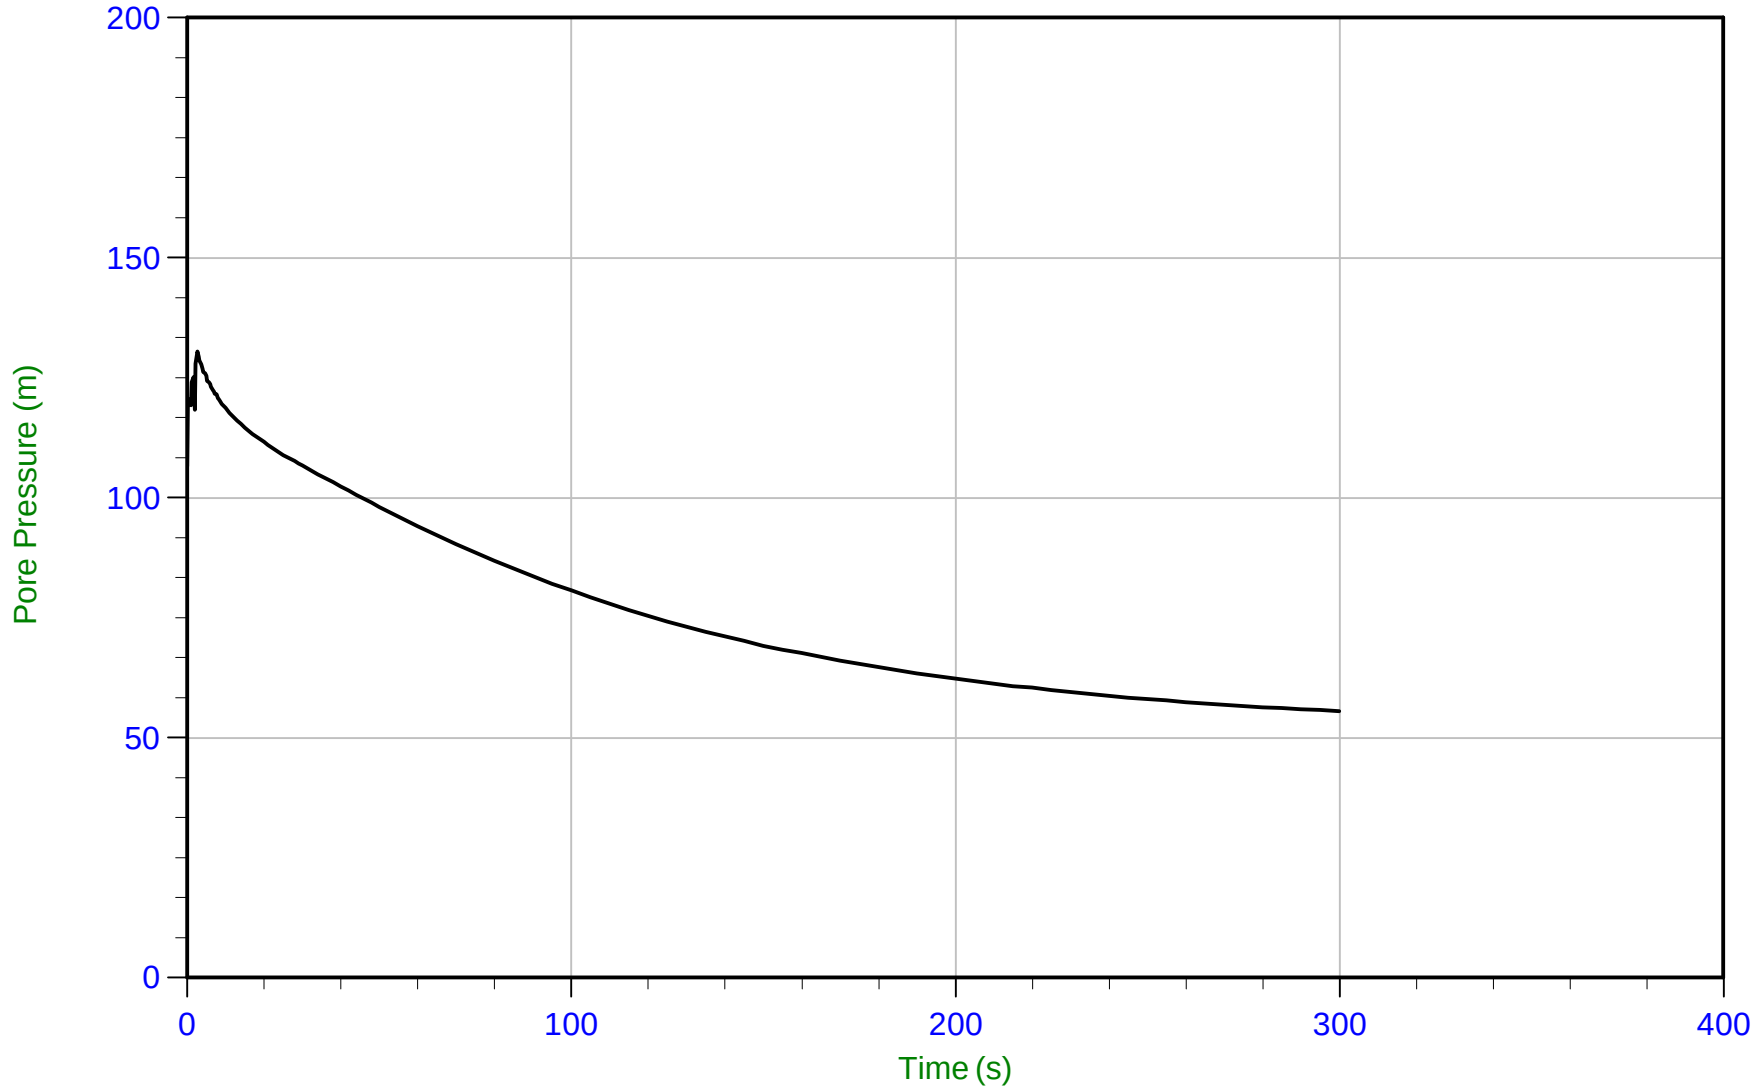

Trace Summary:

Filename: 22-02-23796_RP22-22CPT136.PPF
Depth: 6.850 m / 22.473 ft
Duration: 300.0 s


u Min: 55.6 m
u Max: 130.5 m
u Final: 55.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 11:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT136
Cone: 750:T1500F15U35 Area=15 cm²

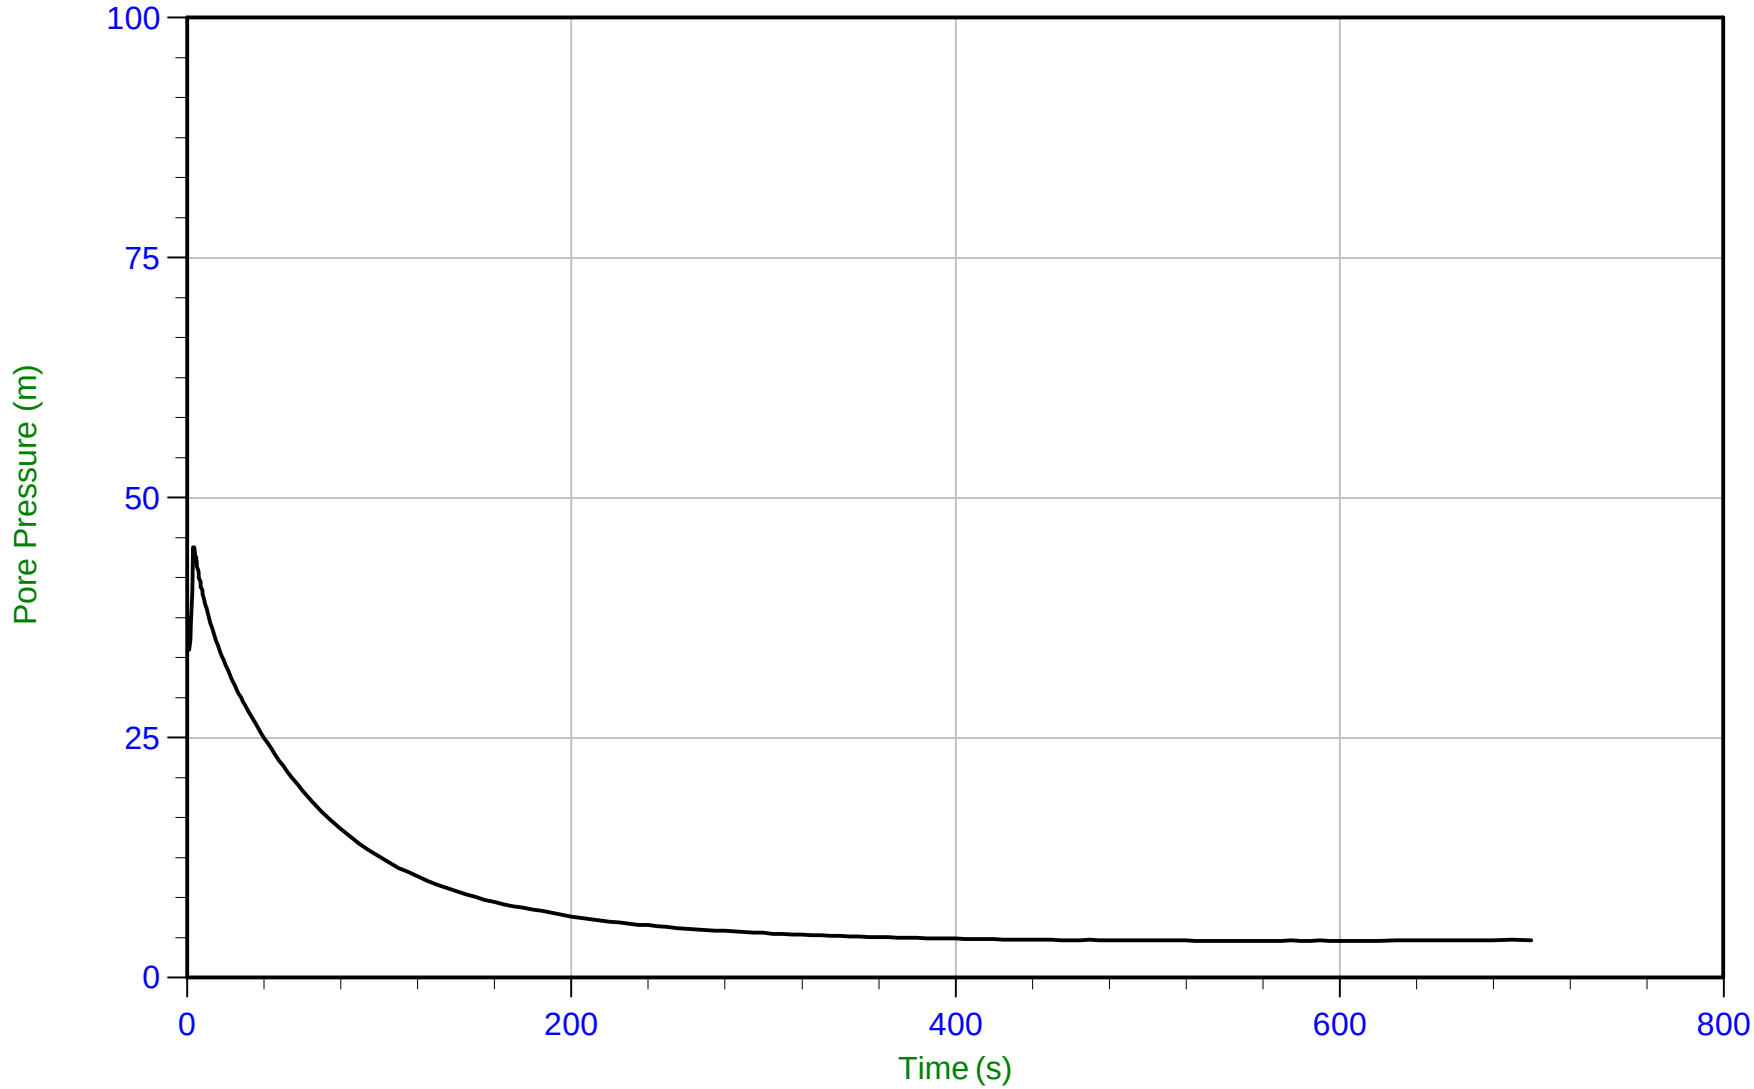

Trace Summary:

Filename: 22-02-23796_RP22-22CPT136.PPF
Depth: 8.850 m / 29.035 ft
Duration: 700.0 s


u Min: 3.8 m
u Max: 44.8 m
u Final: 3.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 12:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT137
Cone: 750:T1500F15U35 Area=15 cm²

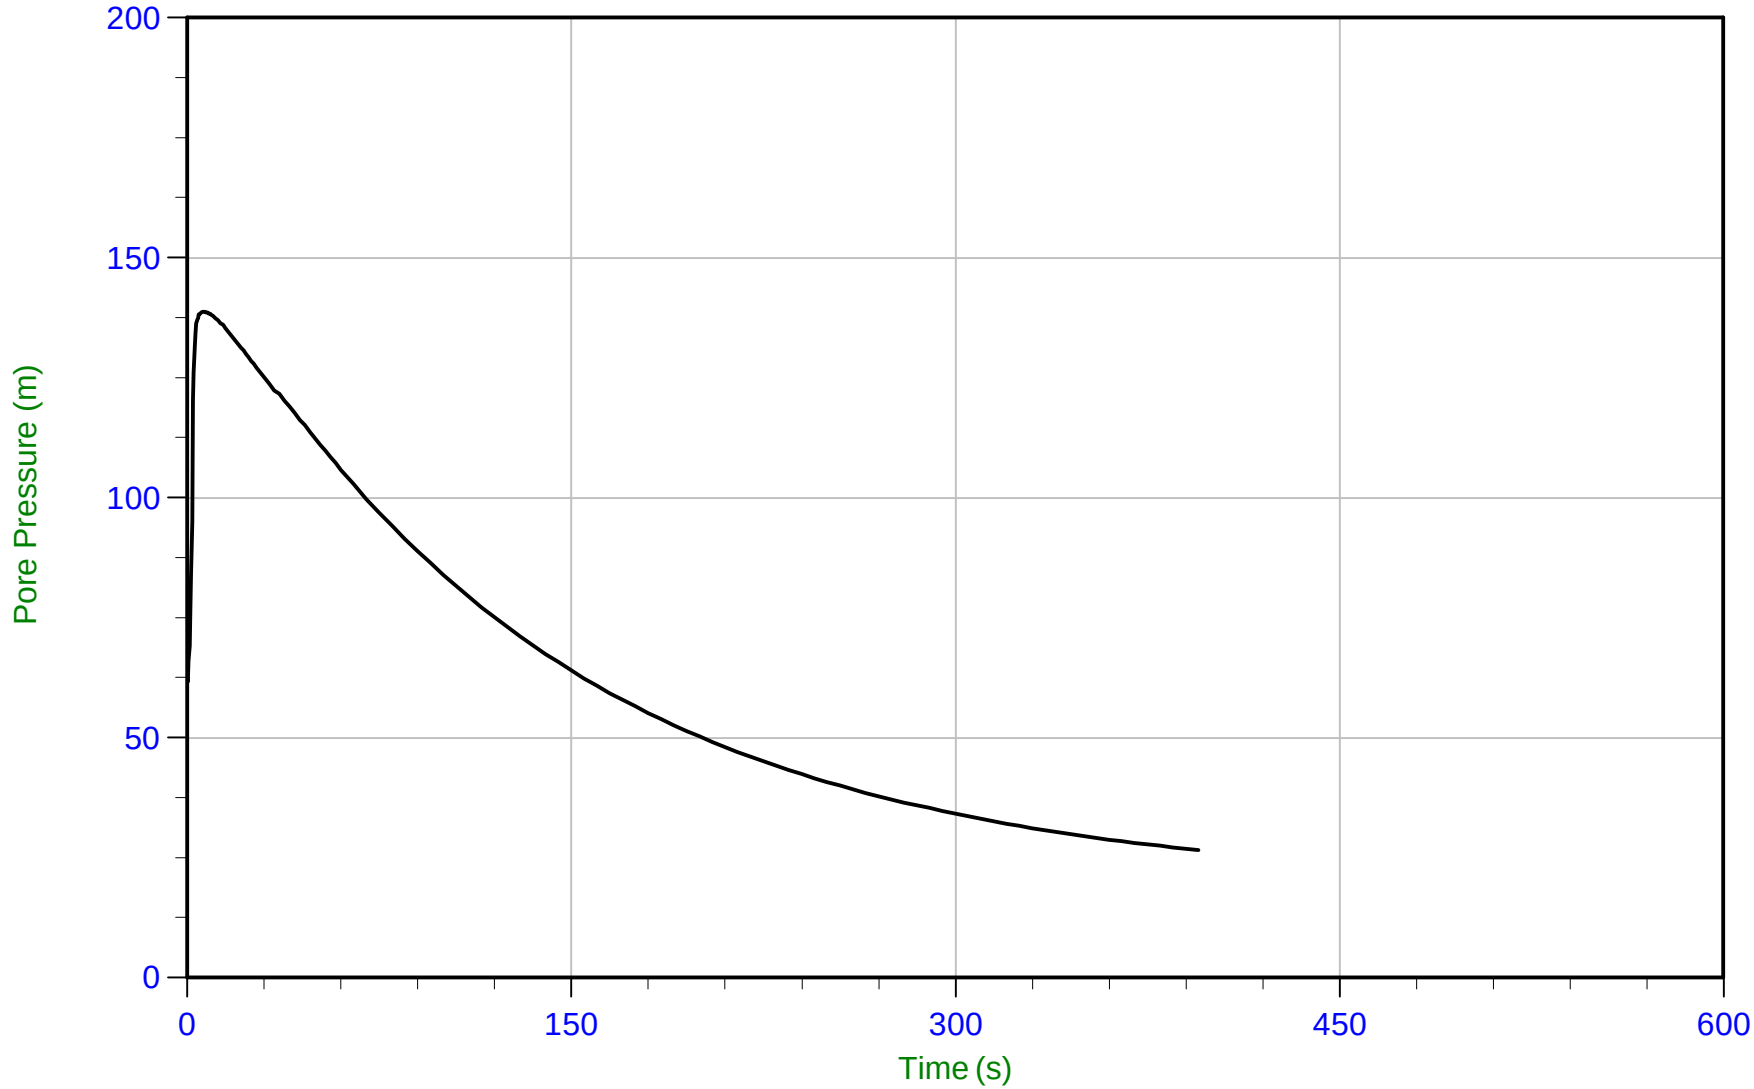

Trace Summary:

Filename: 22-02-23796_RP22-22CPT137.PPF
Depth: 8.350 m / 27.395 ft
Duration: 395.0 s


u Min: 26.6 m
u Max: 138.7 m
u Final: 26.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 12:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT137
Cone: 750:T1500F15U35 Area=15 cm²

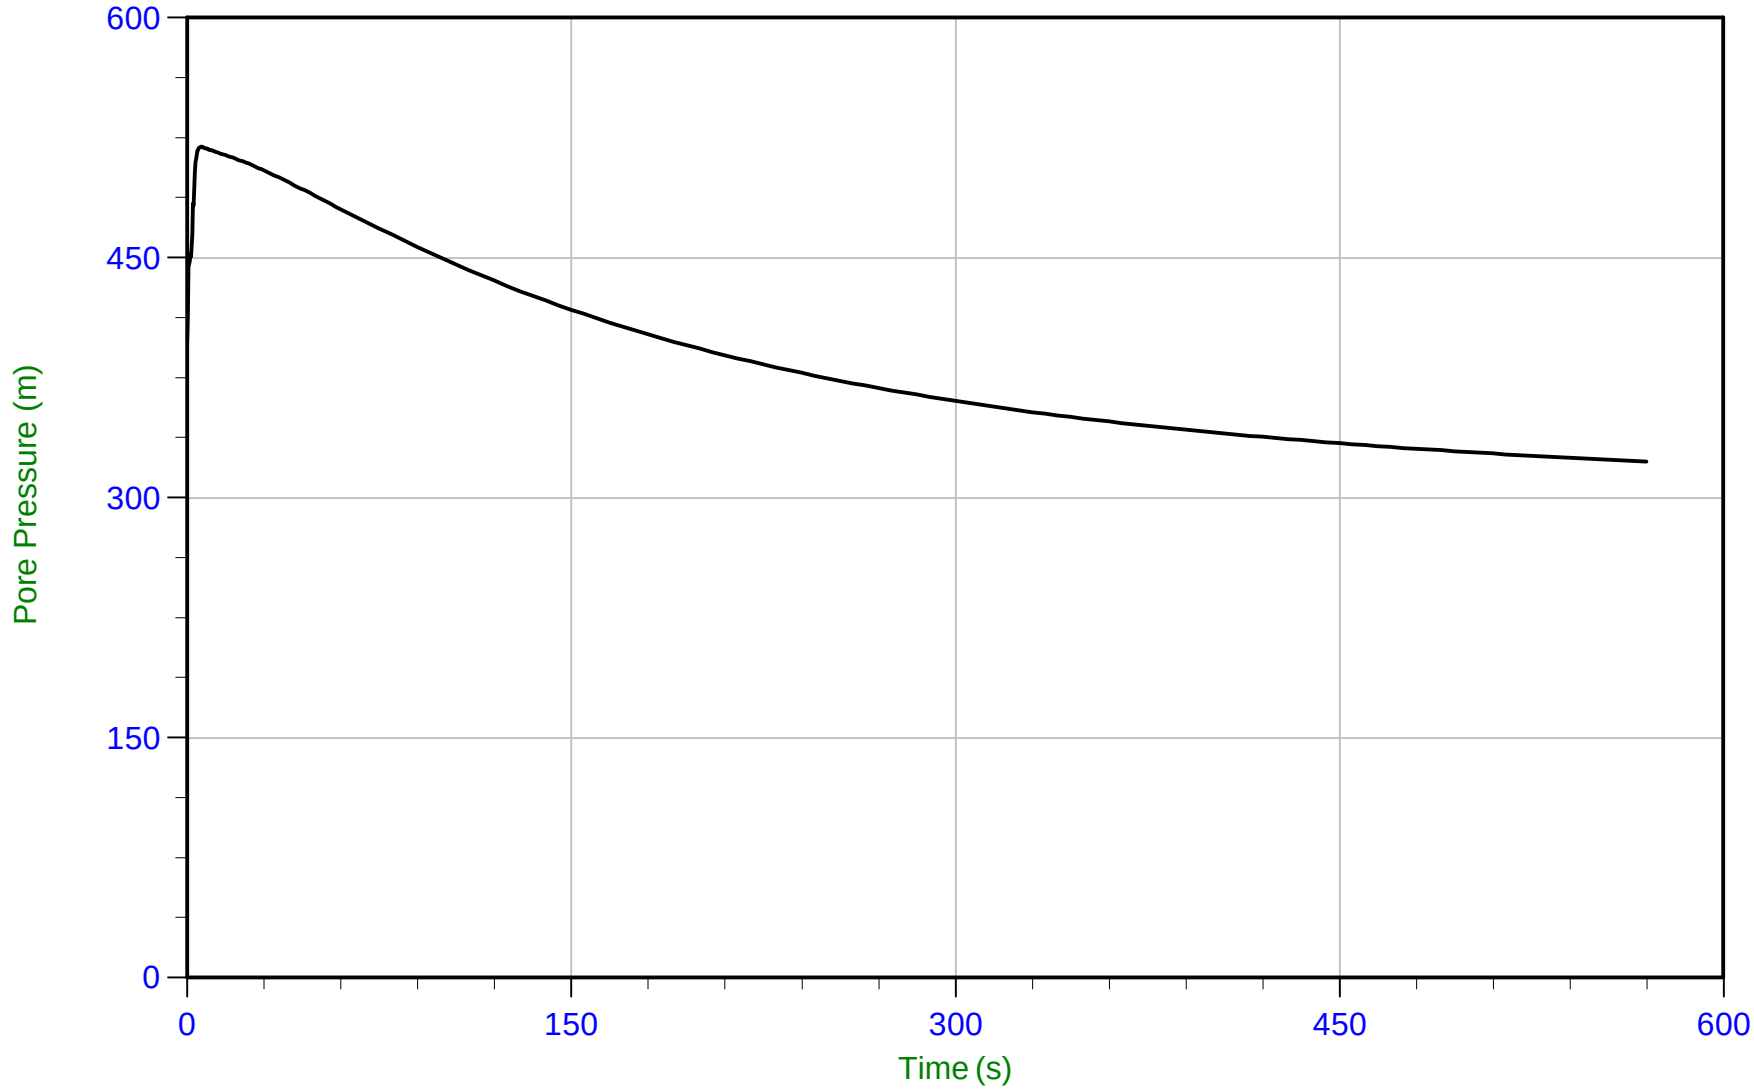

Trace Summary:

Filename: 22-02-23796_RP22-22CPT137.PPF
Depth: 9.675 m / 31.742 ft
Duration: 570.0 s


u Min: 322.7 m
u Max: 519.4 m
u Final: 322.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 14:22
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT138
Cone: 854:T1500F15U35 Area=15 cm²

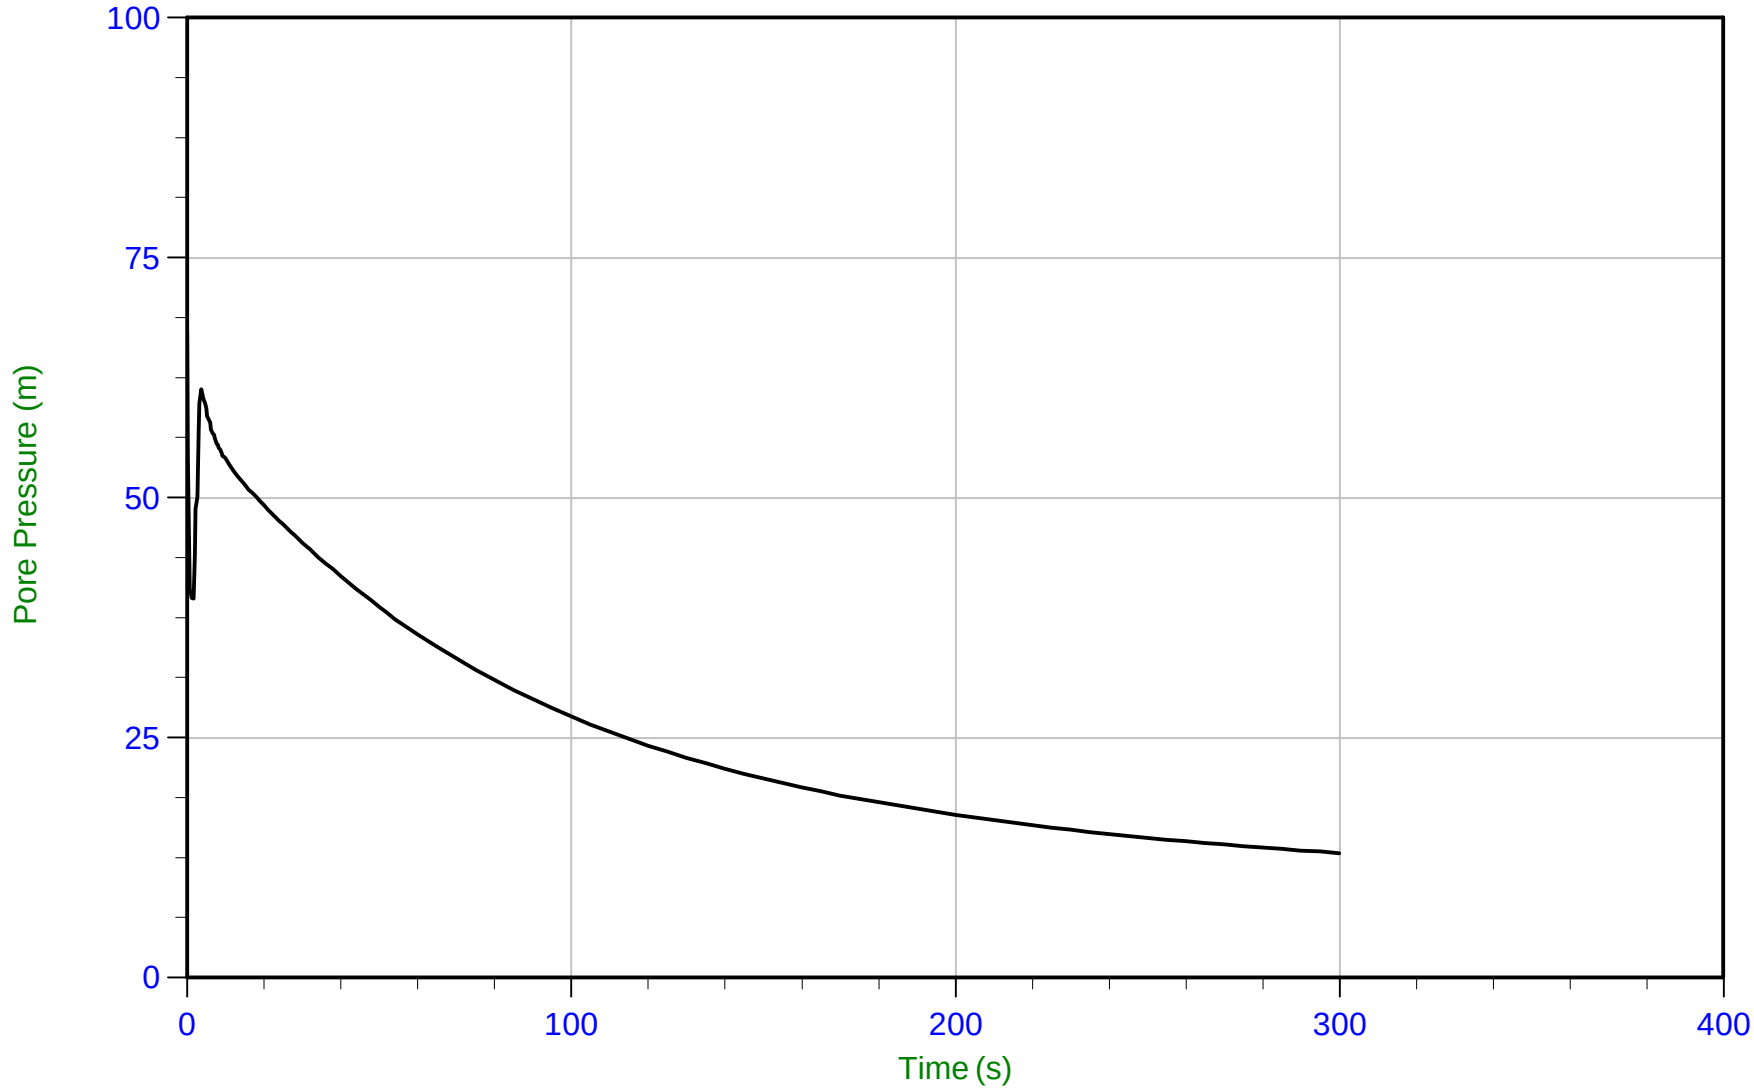

Trace Summary:

Filename: 22-02-23796_RS22-22CPT138.PPF
Depth: 7.975 m / 26.164 ft
Duration: 300.0 s


u Min: 13.0 m
u Max: 67.2 m
u Final: 13.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 15:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT139
Cone: 854:T1500F15U35 Area=15 cm²

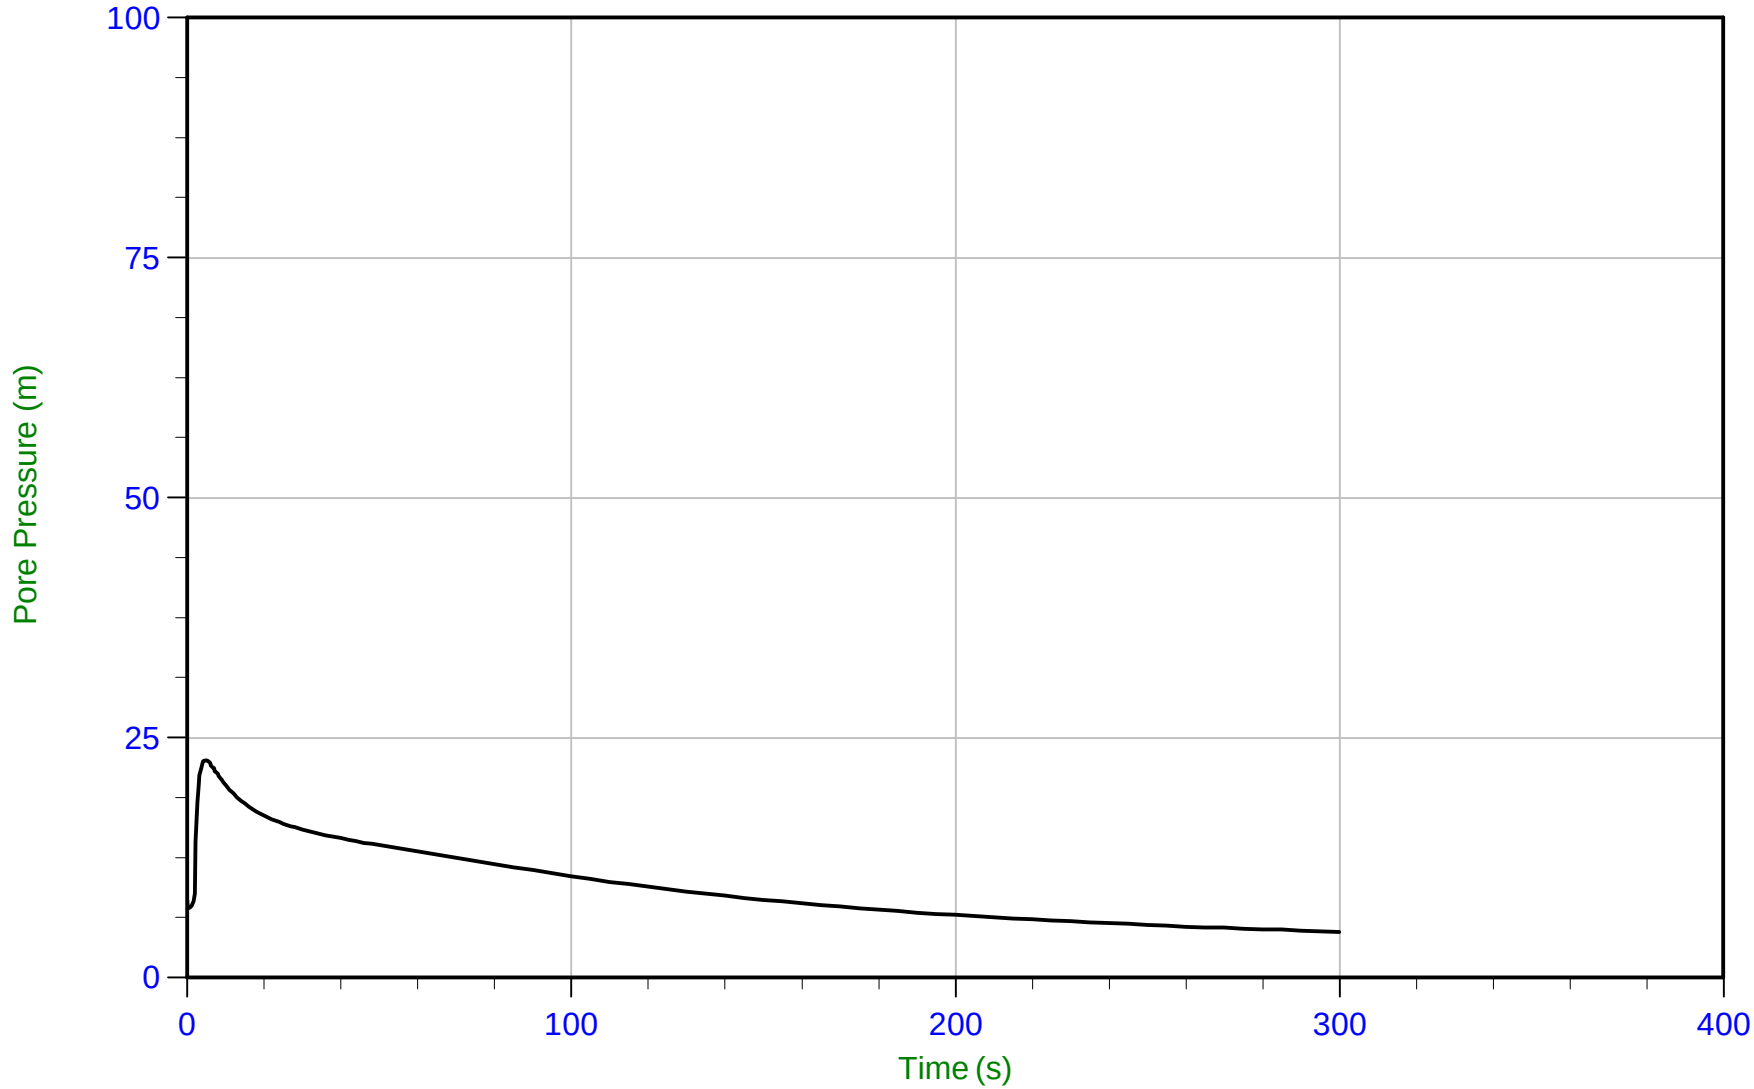

Trace Summary:

Filename: 22-02-23796_RP22-22CPT139.PPF
Depth: 5.900 m / 19.357 ft
Duration: 300.0 s


u Min: 4.8 m
u Max: 22.6 m
u Final: 4.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 15:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT139
Cone: 854:T1500F15U35 Area=15 cm²

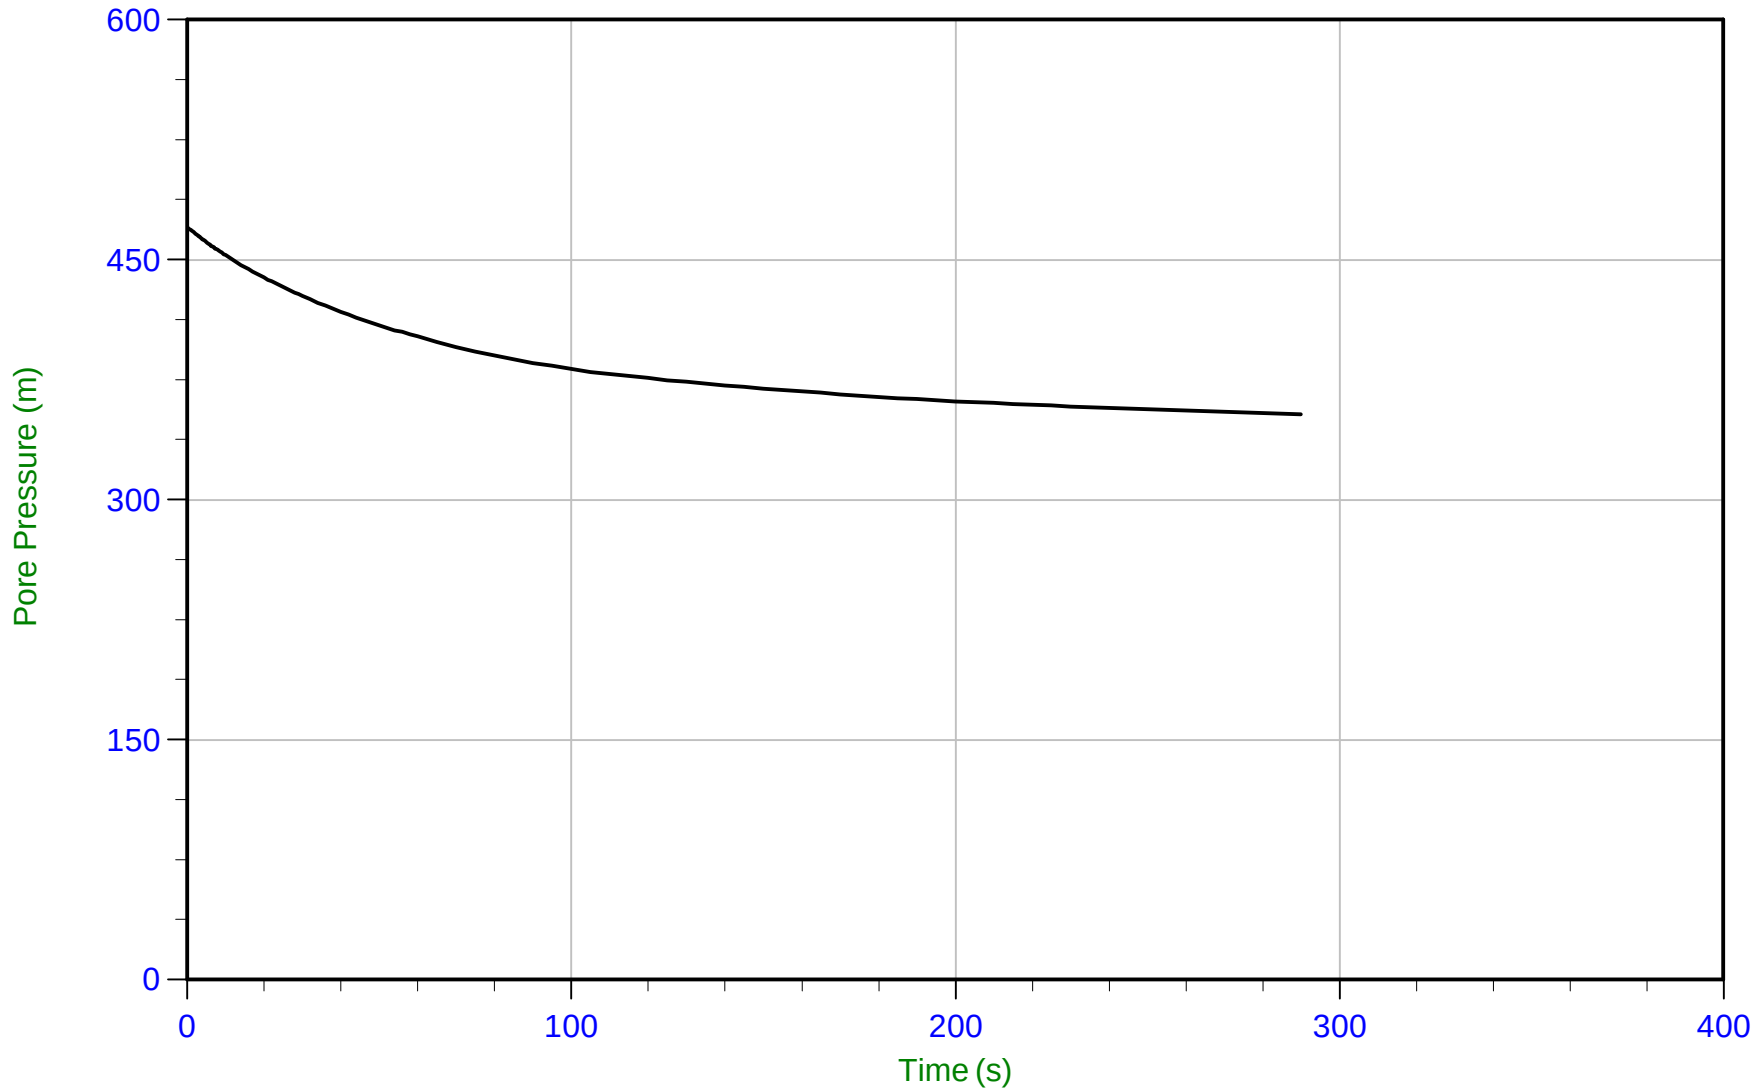

Trace Summary:

Filename: 22-02-23796_RP22-22CPT139.PPF
Depth: 9.000 m / 29.527 ft
Duration: 290.0 s


u Min: 353.5 m
u Max: 470.4 m
u Final: 353.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 16:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT140
Cone: 854:T1500F15U35 Area=15 cm²

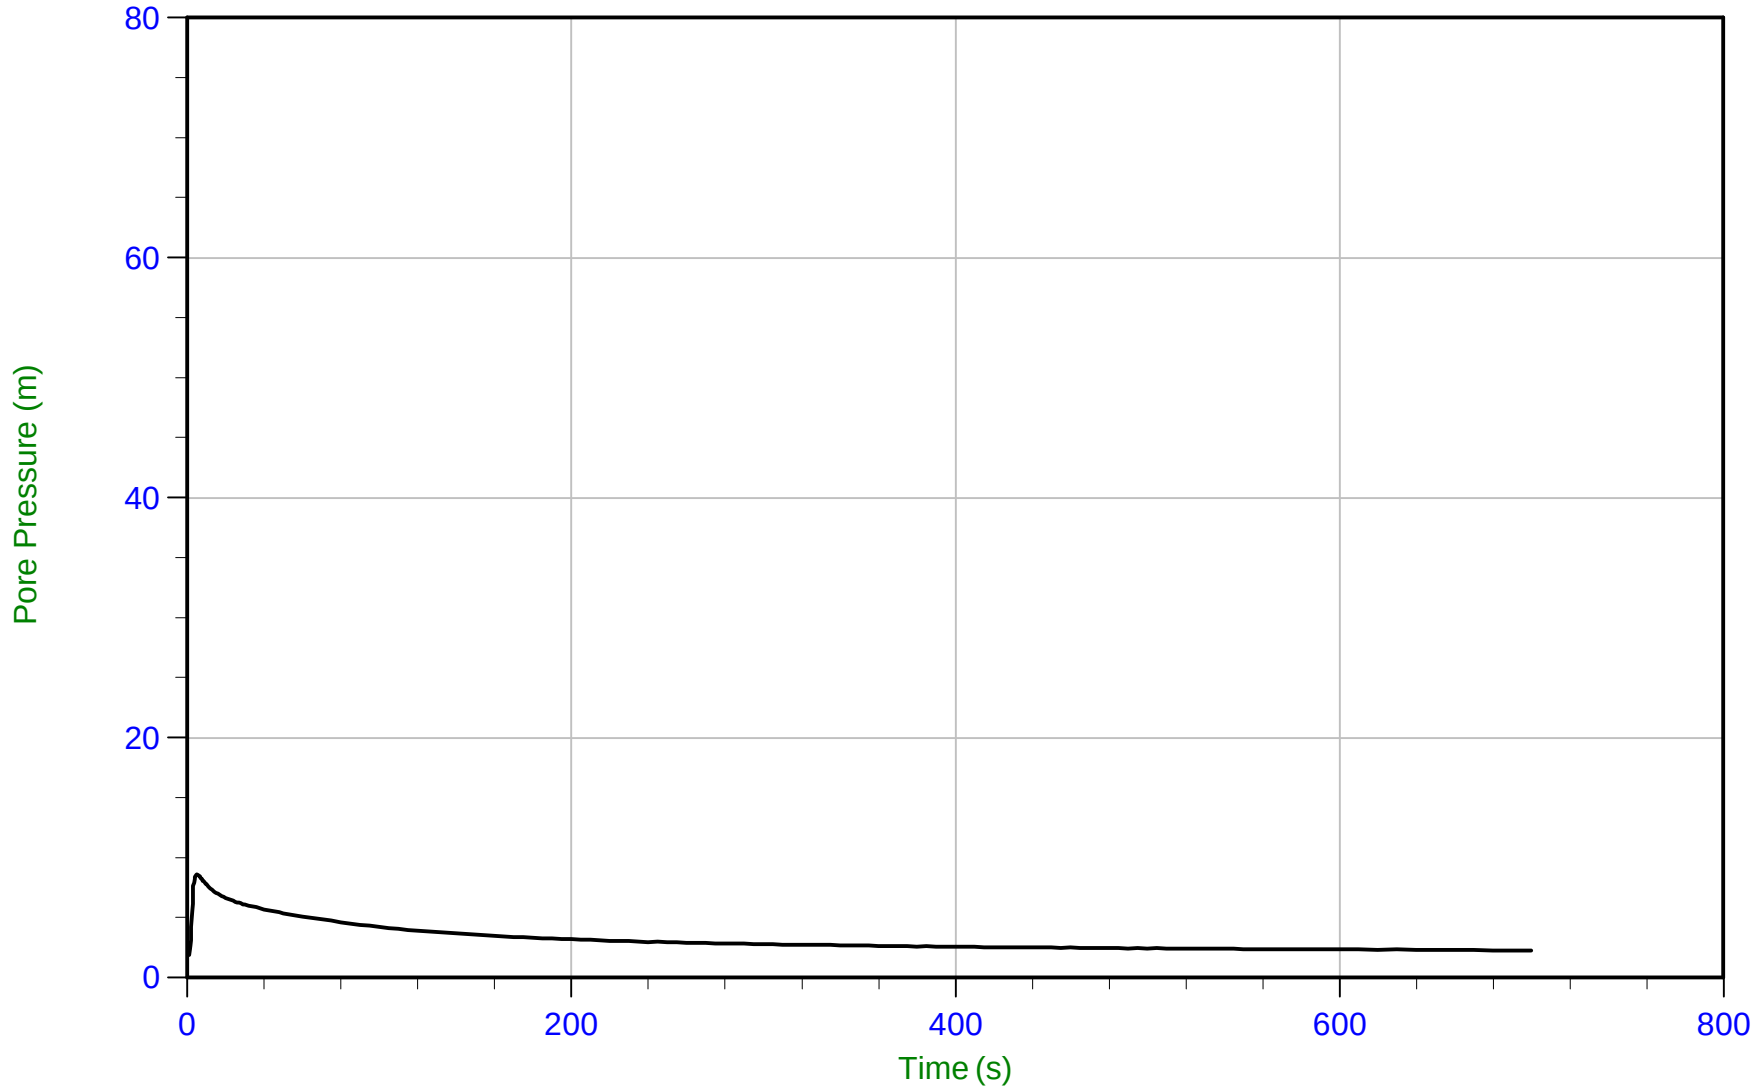

Trace Summary:

Filename: 22-02-23796_RP22-22CPT140.PPF
Depth: 5.850 m / 19.193 ft
Duration: 700.0 s

u Min: 1.9 m
u Max: 8.6 m
u Final: 2.3 m


WT: 3.534 m / 11.594 ft
Ueq: 2.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 07:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT141
Cone: 854:T1500F15U35 Area=15 cm²

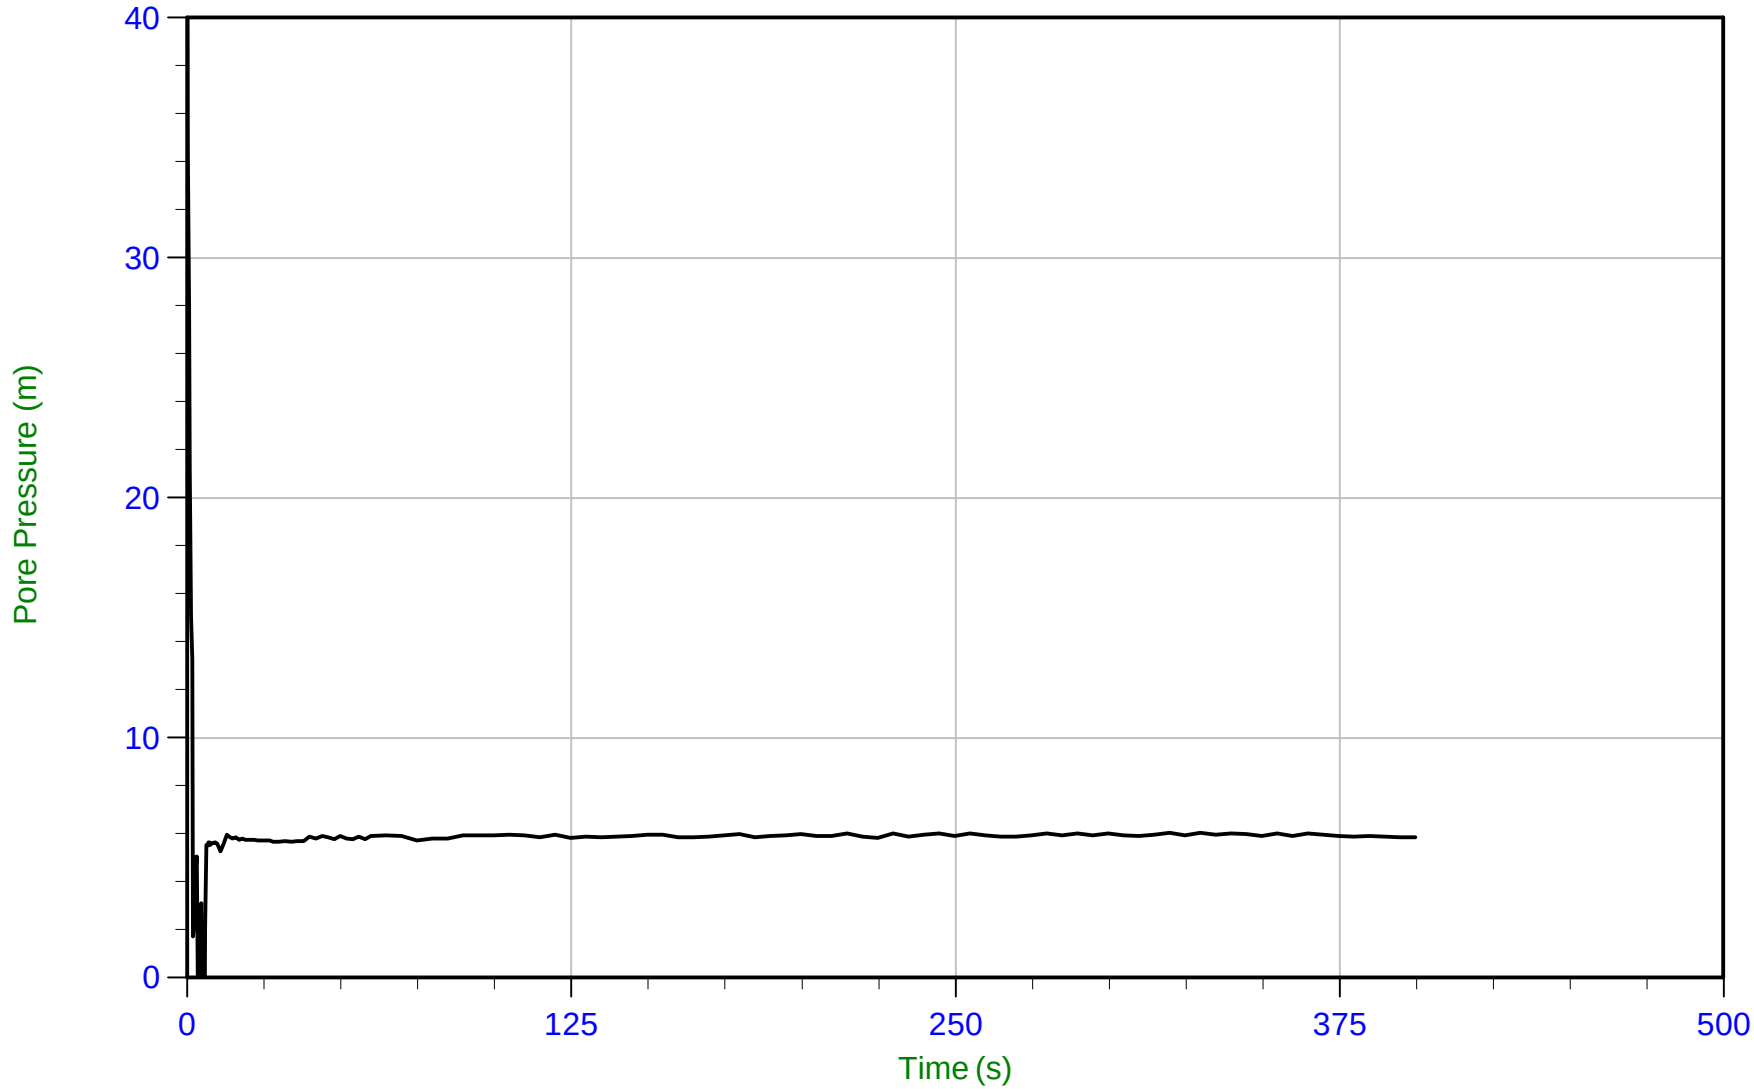

Trace Summary:

Filename: 22-02-23796_RP22-22CPT141.PPF
Depth: 7.500 m / 24.606 ft
Duration: 400.0 s

u Min: -3.5 m
u Max: 48.4 m
u Final: 5.9 m


WT: 1.605 m / 5.266 ft
Ueq: 5.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 09:39
Site: Brooks, Alberta

Sounding: RCPT22-22CPT142
Cone: 854:T1500F15U35 Area=15 cm²

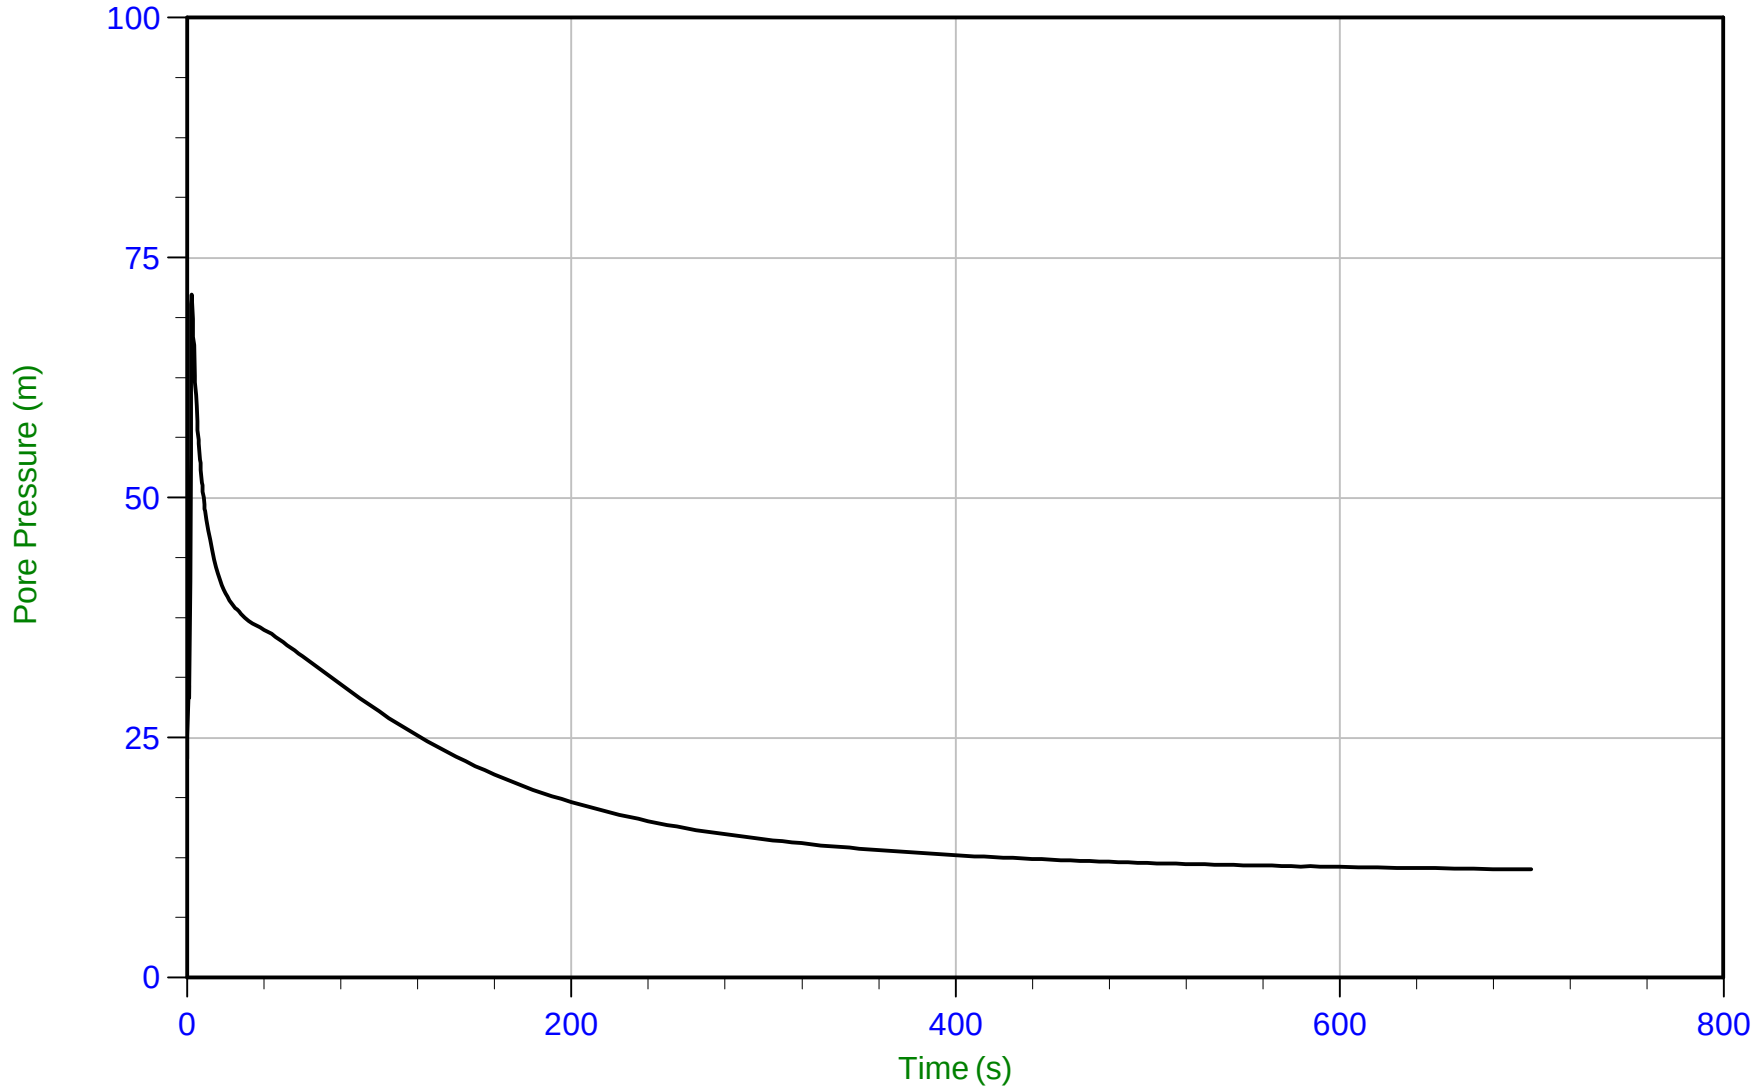

Trace Summary:

Filename: 22-02-23796_RP22-22CPT142.PPF
Depth: 4.775 m / 15.666 ft
Duration: 700.0 s


u Min: 11.3 m
u Max: 71.2 m
u Final: 11.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 09:39
Site: Brooks, Alberta

Sounding: RCPT22-22CPT142
Cone: 854:T1500F15U35 Area=15 cm²

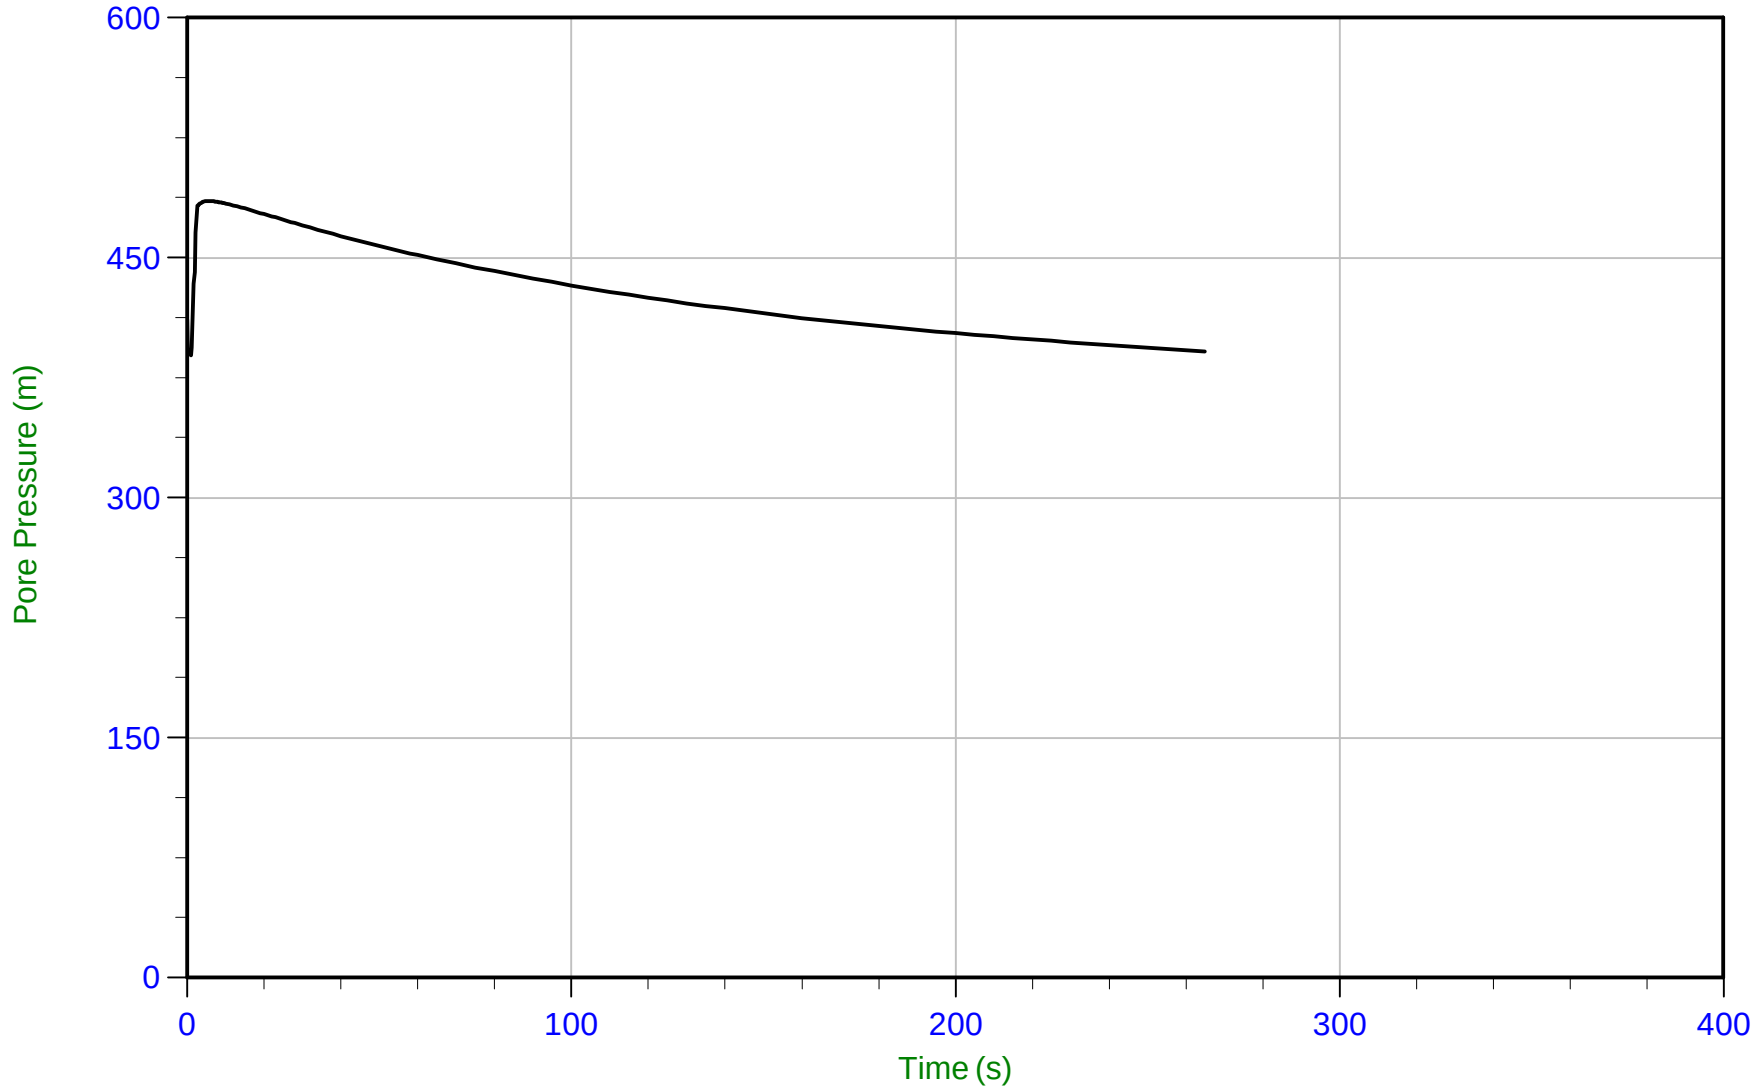

Trace Summary:

Filename: 22-02-23796_RP22-22CPT142.PPF
Depth: 7.825 m / 25.672 ft
Duration: 265.0 s


u Min: 388.9 m
u Max: 485.5 m
u Final: 391.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 10:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT143
Cone: 854:T1500F15U35 Area=15 cm²

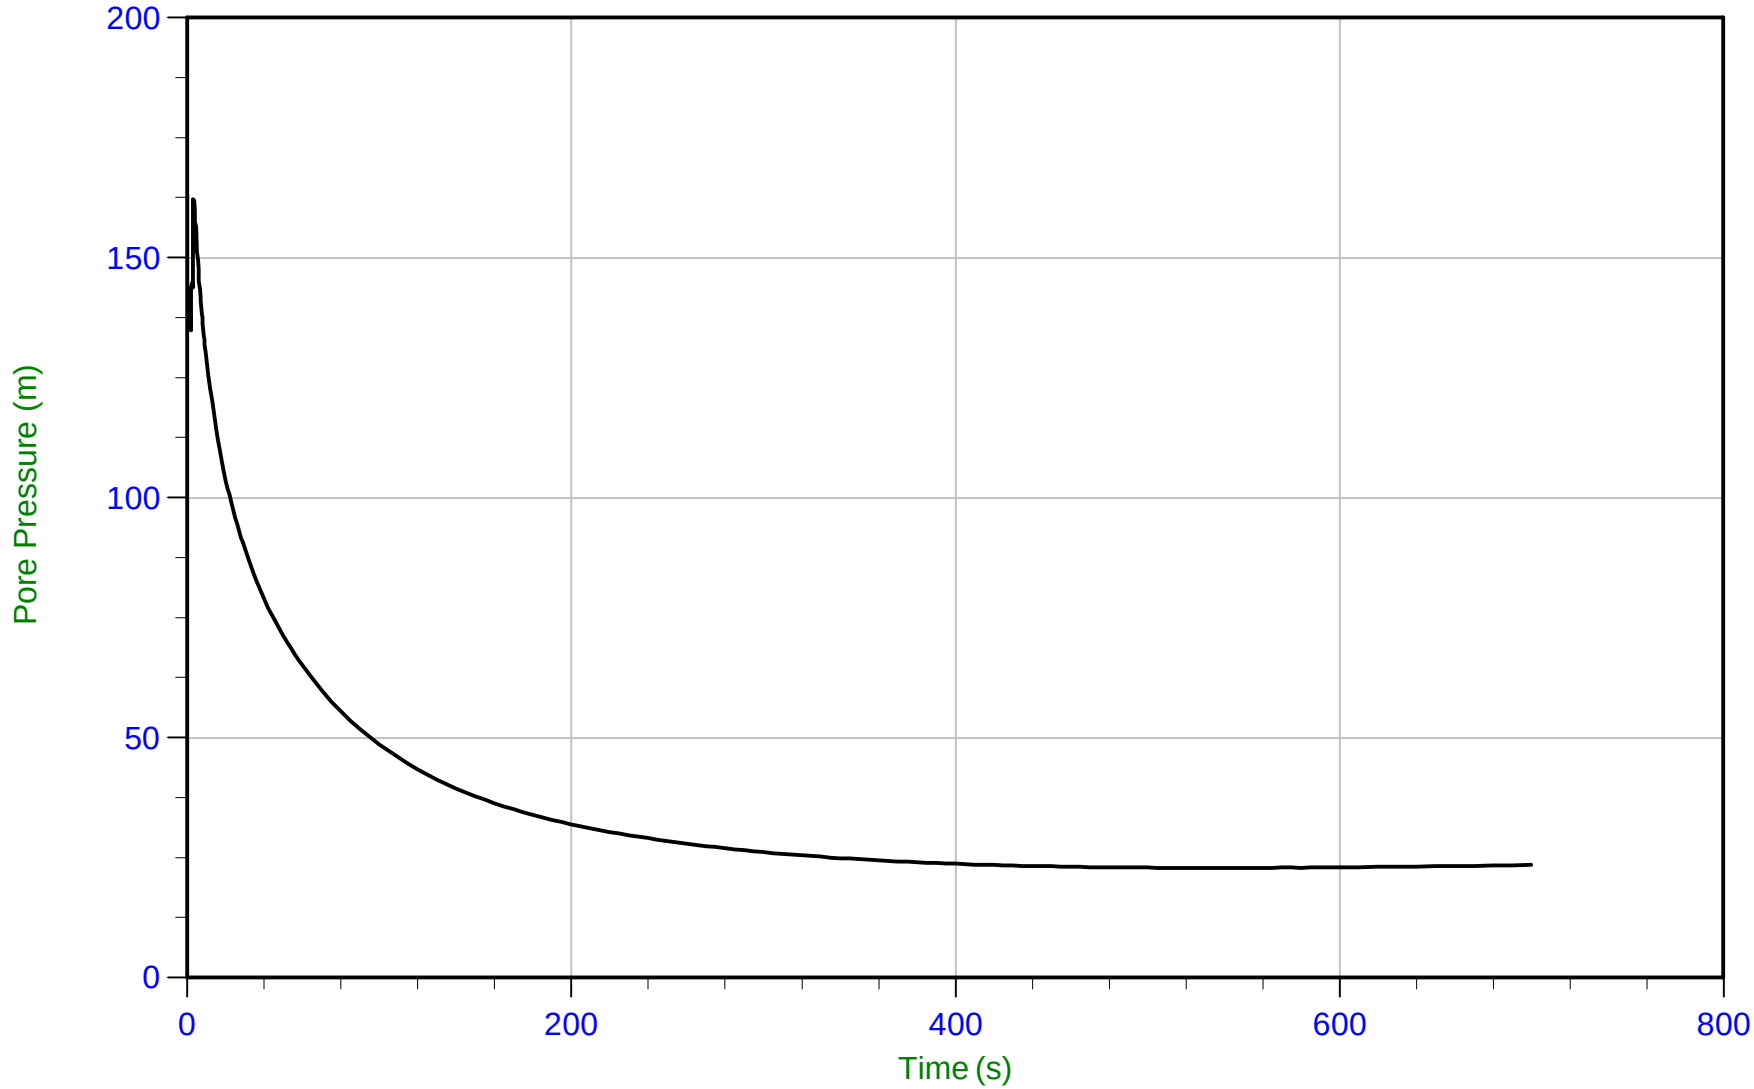

Trace Summary:

Filename: 22-02-23796_RP22-22CPT143.PPF
Depth: 5.875 m / 19.275 ft
Duration: 700.0 s


u Min: 22.9 m
u Max: 163.2 m
u Final: 23.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 12:47
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT144
Cone: 854:T1500F15U35 Area=15 cm²

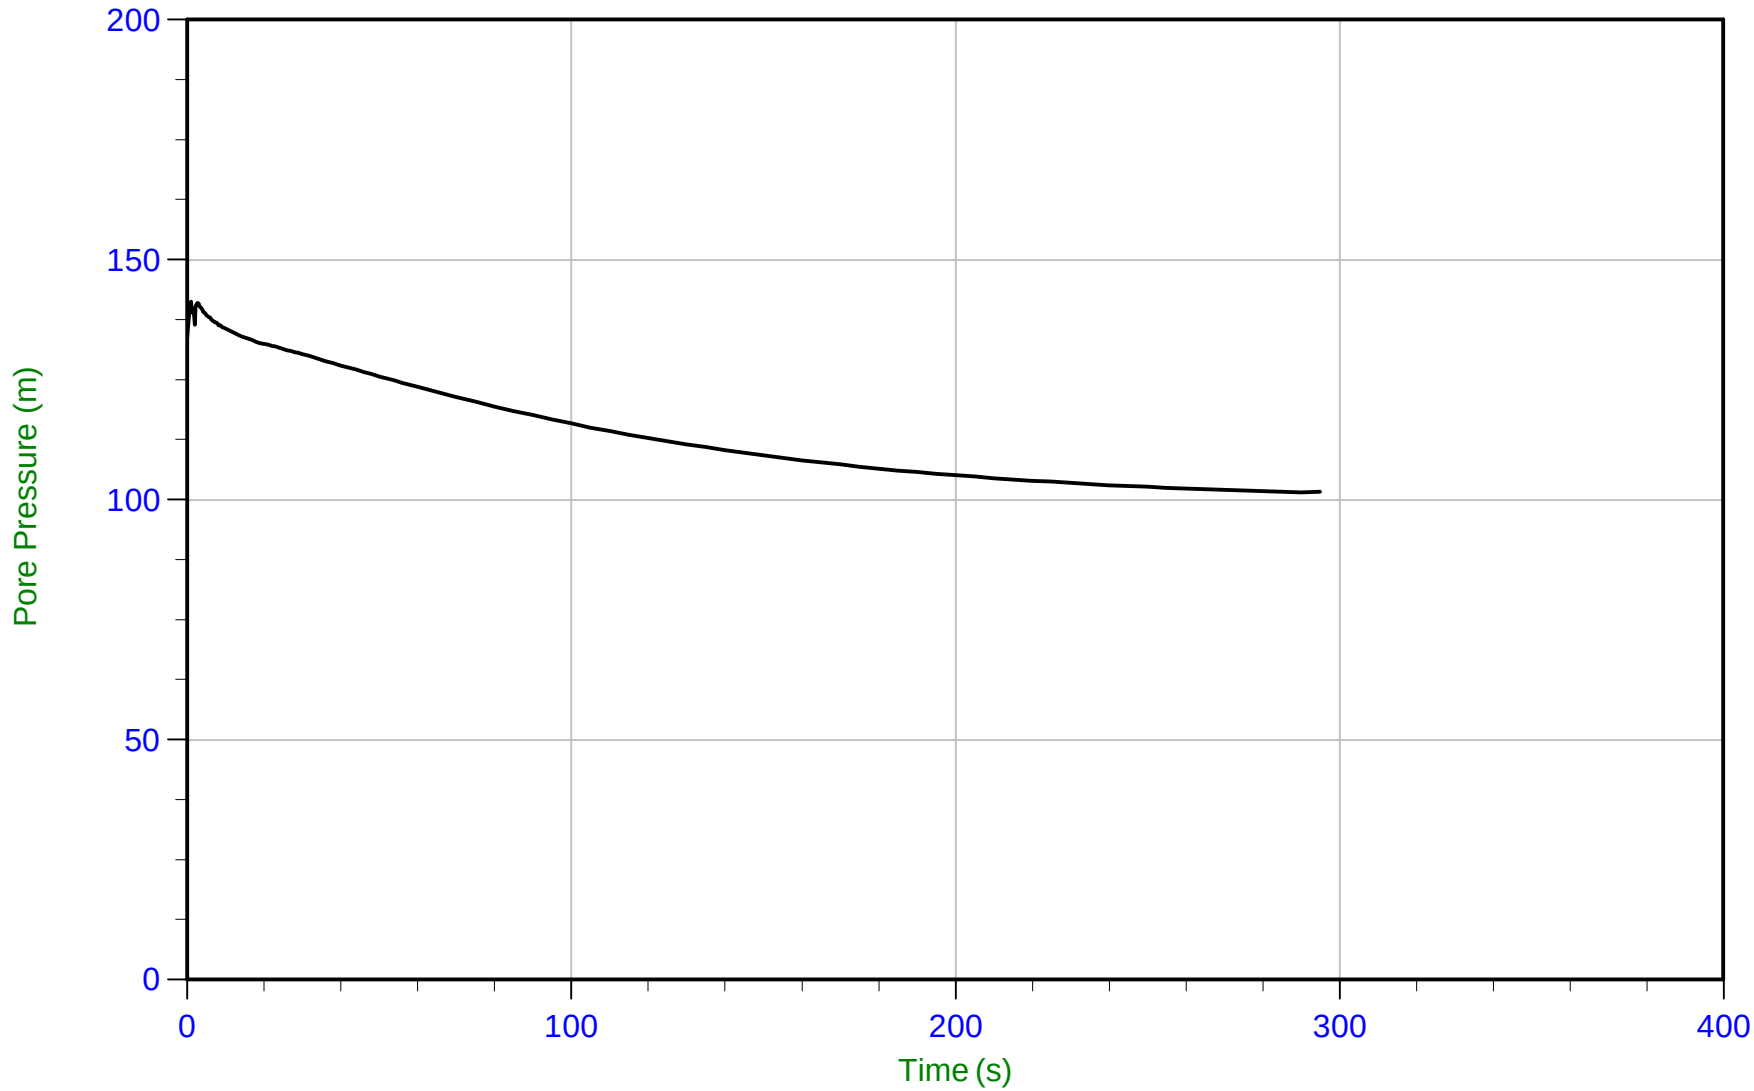

Trace Summary:

Filename: 22-02-23796_RS22-22CPT144.PPF
Depth: 5.875 m / 19.275 ft
Duration: 295.0 s


u Min: 101.6 m
u Max: 141.3 m
u Final: 101.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 12:47
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT144
Cone: 854:T1500F15U35 Area=15 cm²

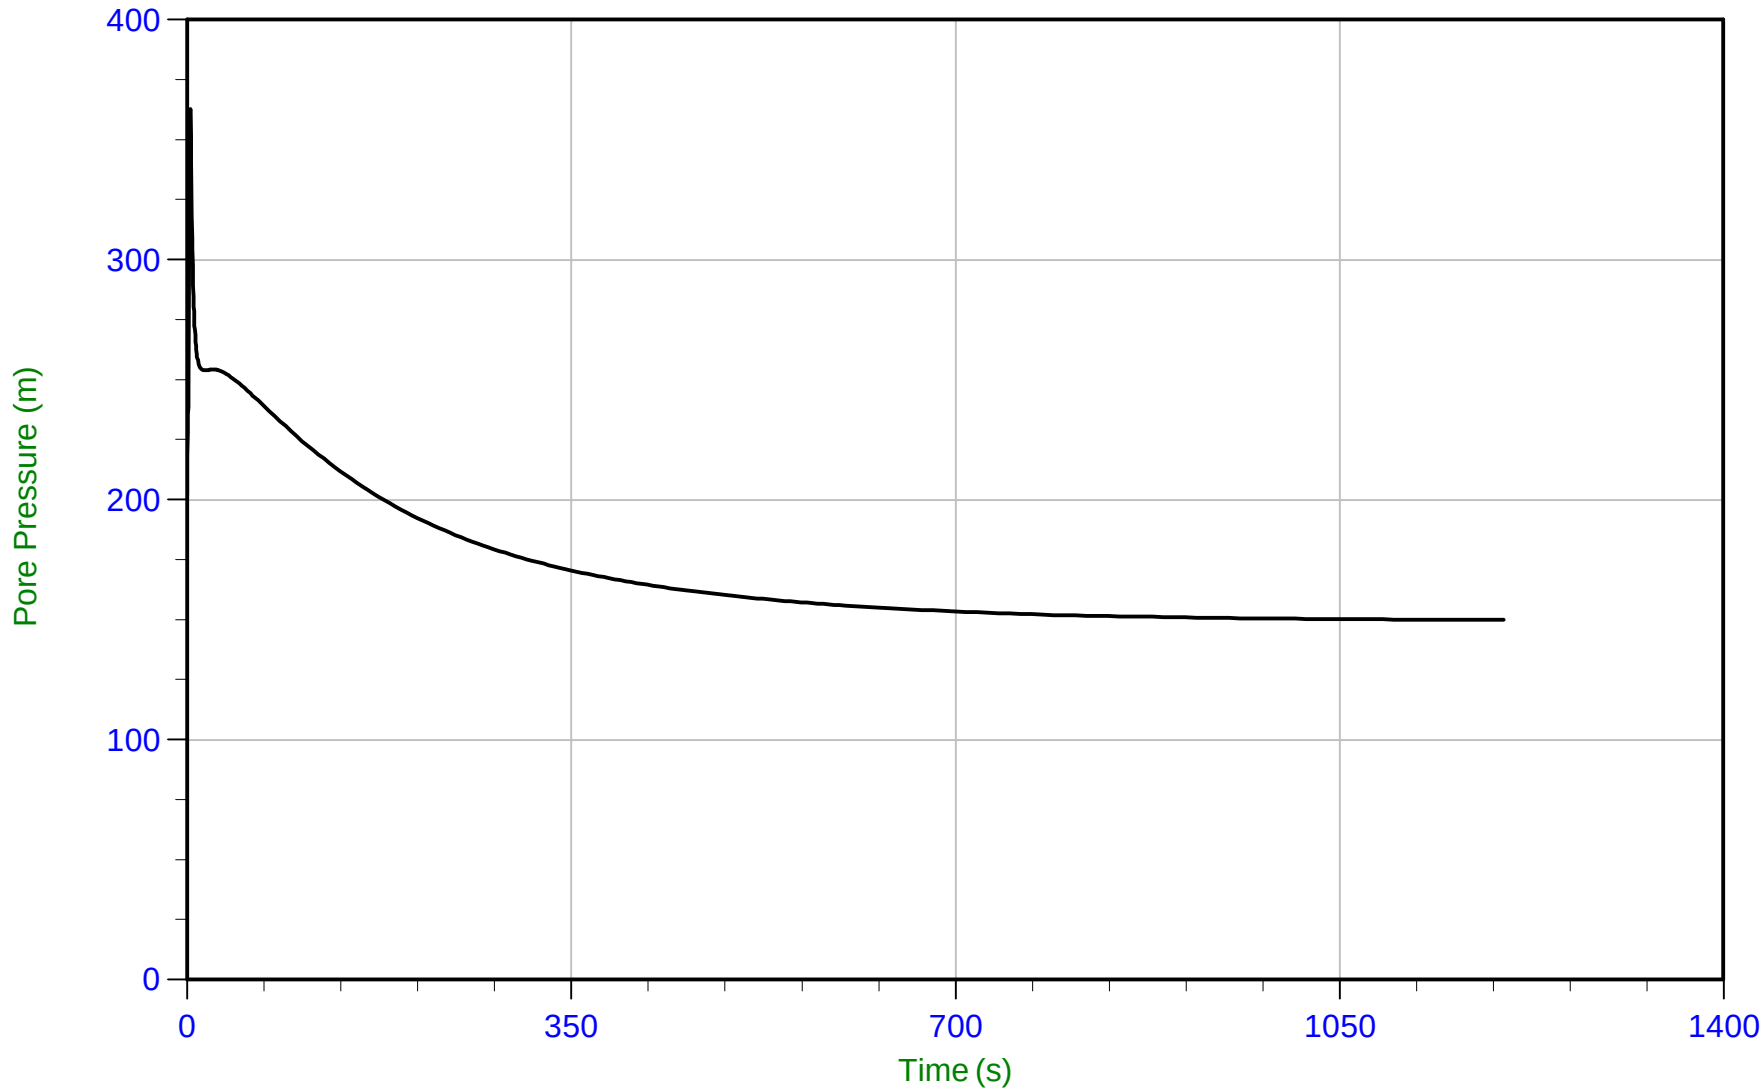

Trace Summary:

Filename: 22-02-23796_RS22-22CPT144.PPF
Depth: 7.875 m / 25.836 ft
Duration: 1200.0 s


u Min: 150.0 m
u Max: 362.9 m
u Final: 150.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 13:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT145
Cone: 854:T1500F15U35 Area=15 cm²

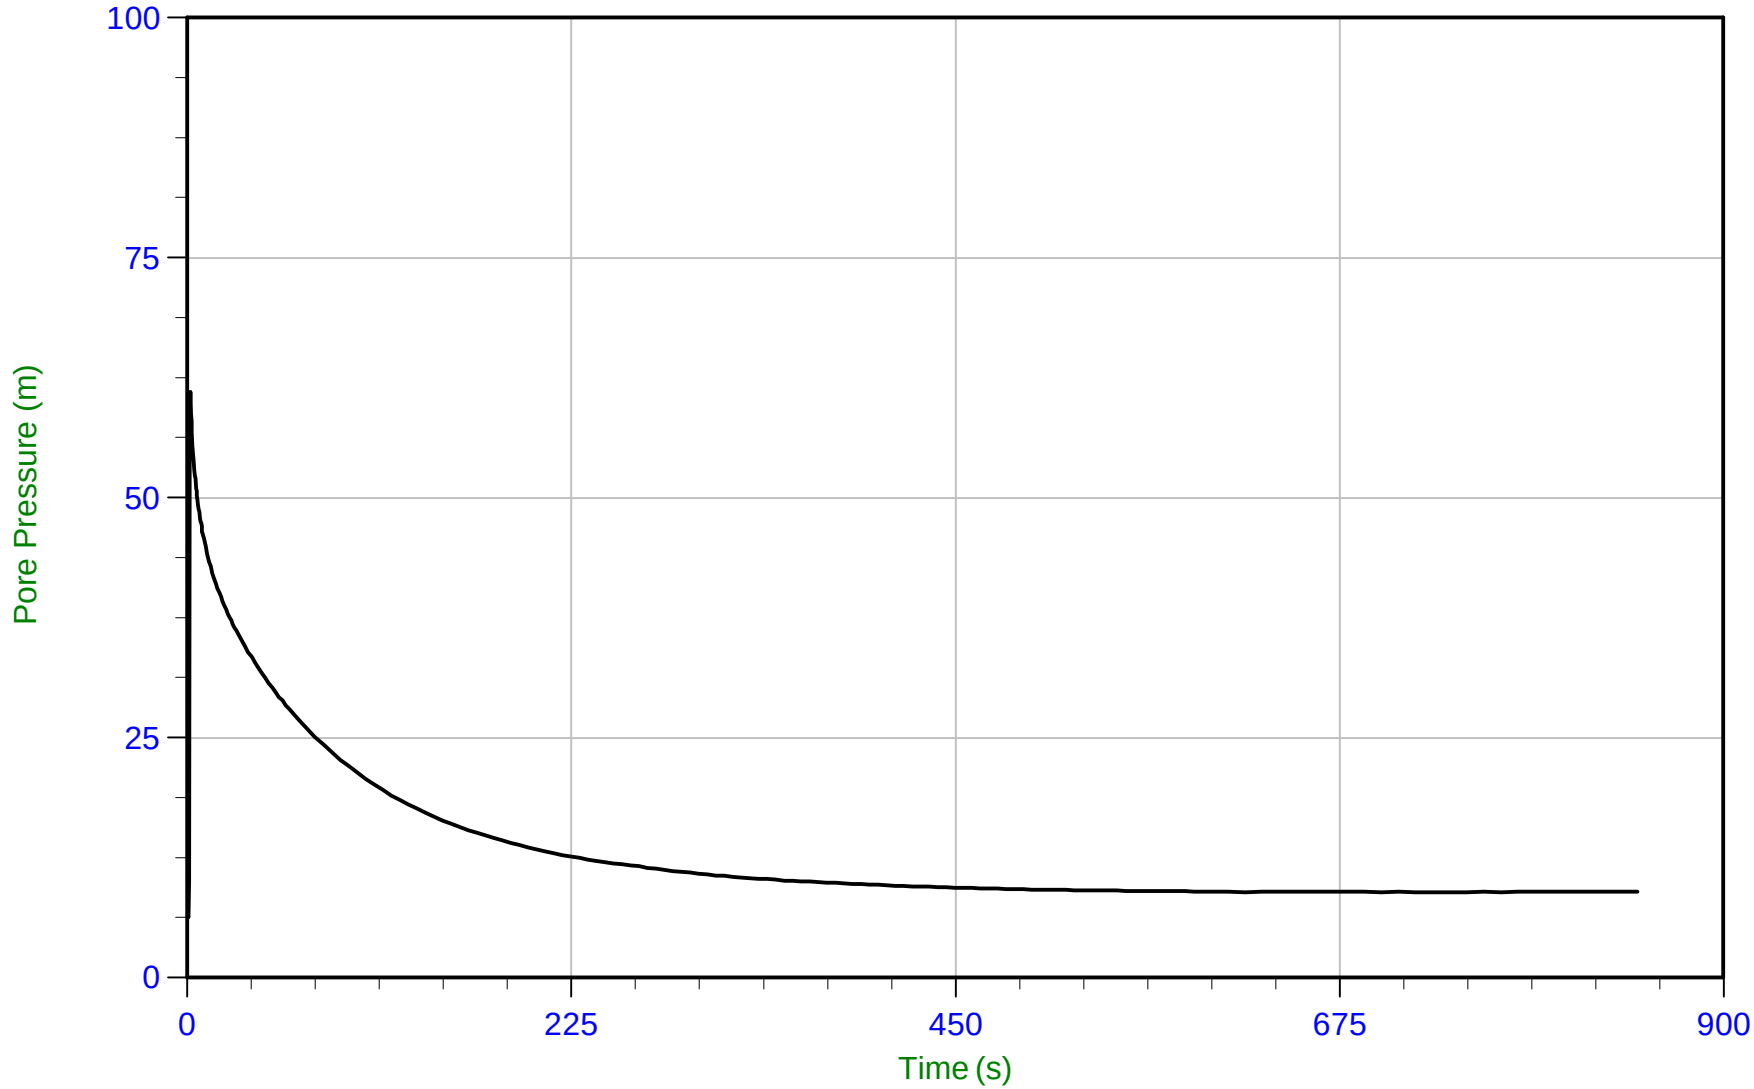

Trace Summary:

Filename: 22-02-23796_RP22-22CPT145.PPF
Depth: 4.875 m / 15.994 ft
Duration: 850.0 s


u Min: 6.3 m
u Max: 61.0 m
u Final: 9.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 07:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT146
Cone: 651:T1500F15U35 Area=15 cm²

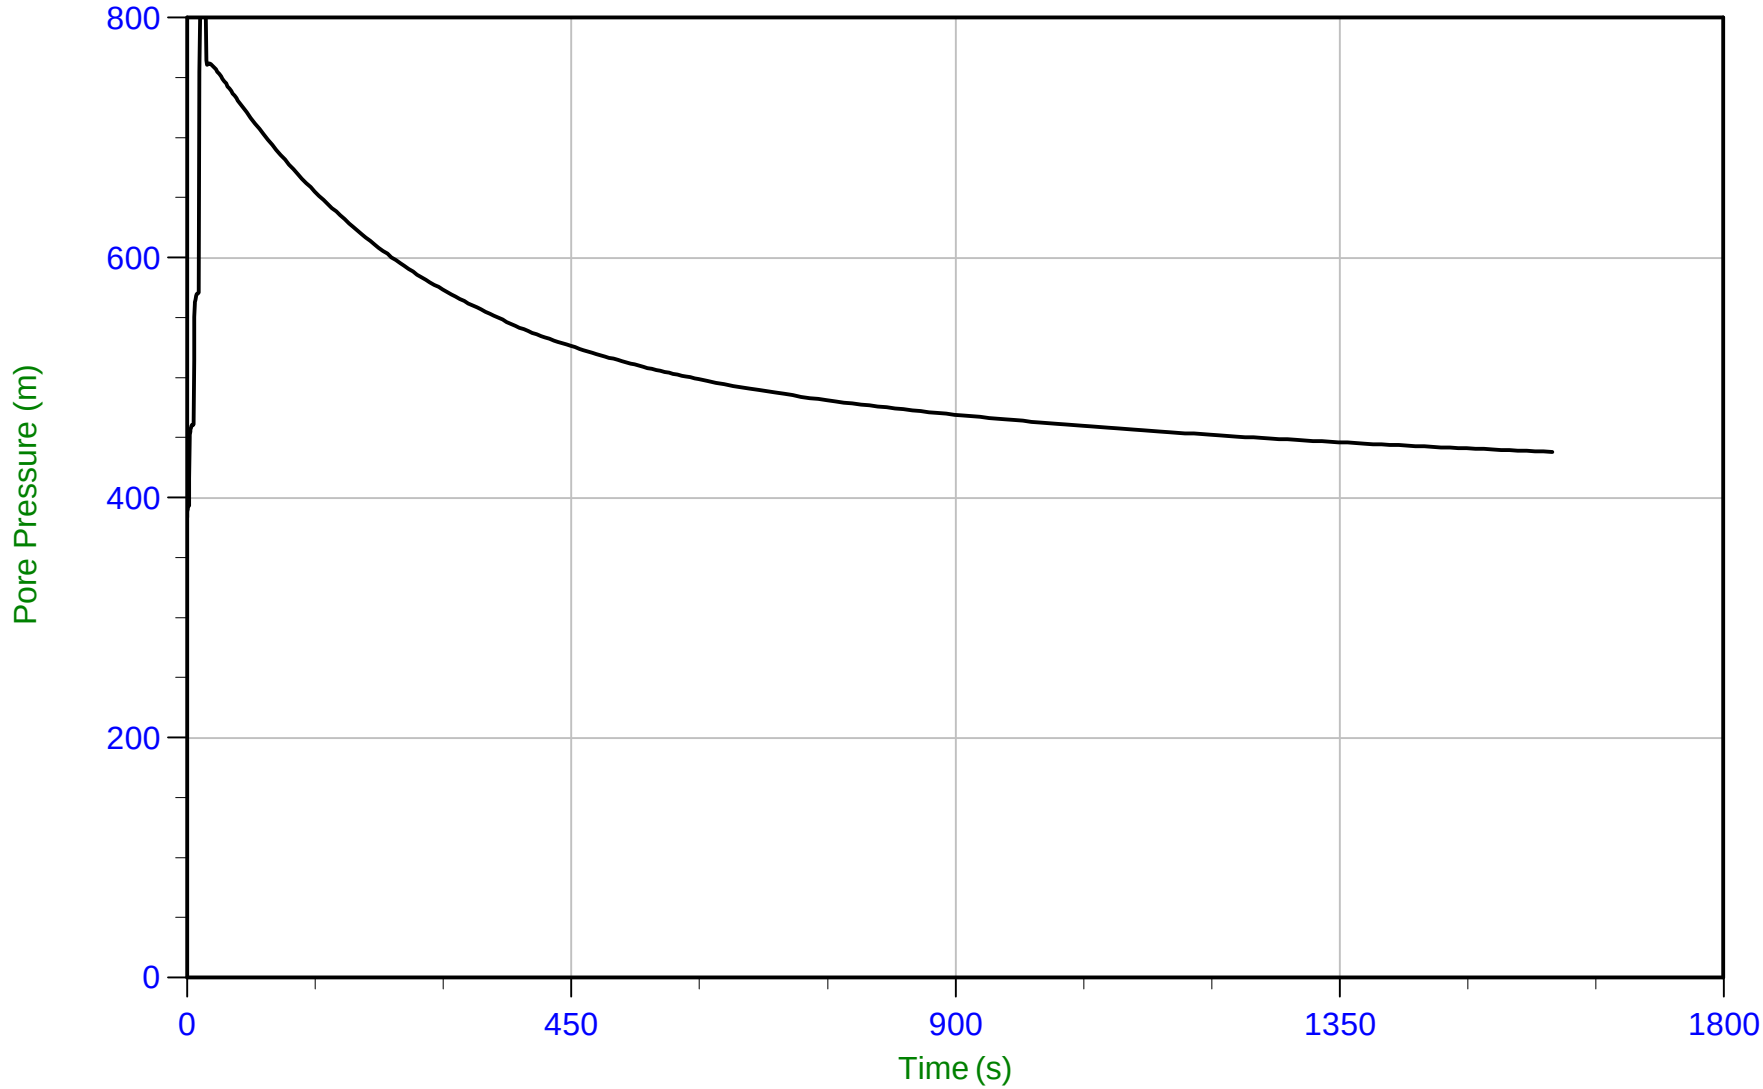

Trace Summary:

Filename: 22-02-23796_RP22-22CPT146.PPF
Depth: 7.675 m / 25.180 ft
Duration: 1600.0 s


u Min: 383.6 m
u Max: 888.5 m
u Final: 438.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 10:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT147
Cone: 651:T1500F15U35 Area=15 cm²

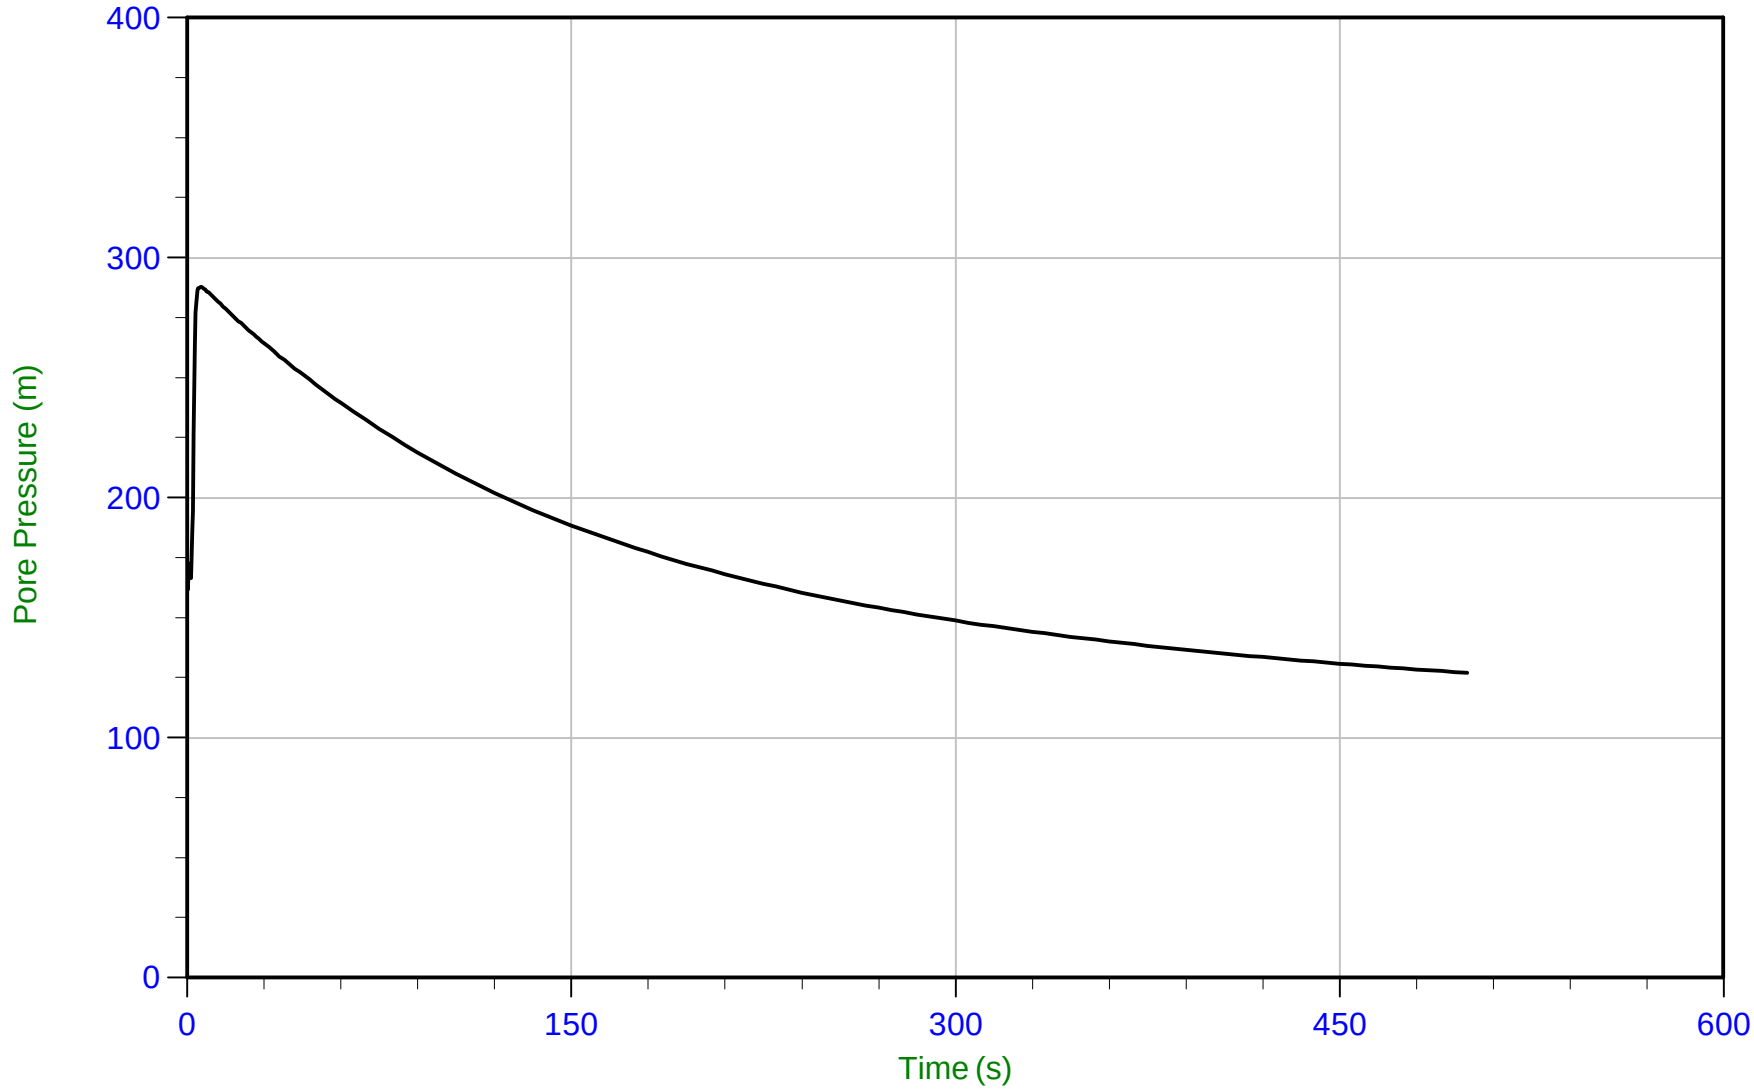

Trace Summary:

Filename: 22-02-23796_RP22-22CPT147.PPF
Depth: 6.275 m / 20.587 ft
Duration: 500.0 s


u Min: 127.0 m
u Max: 287.8 m
u Final: 127.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 10:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT147
Cone: 651:T1500F15U35 Area=15 cm²

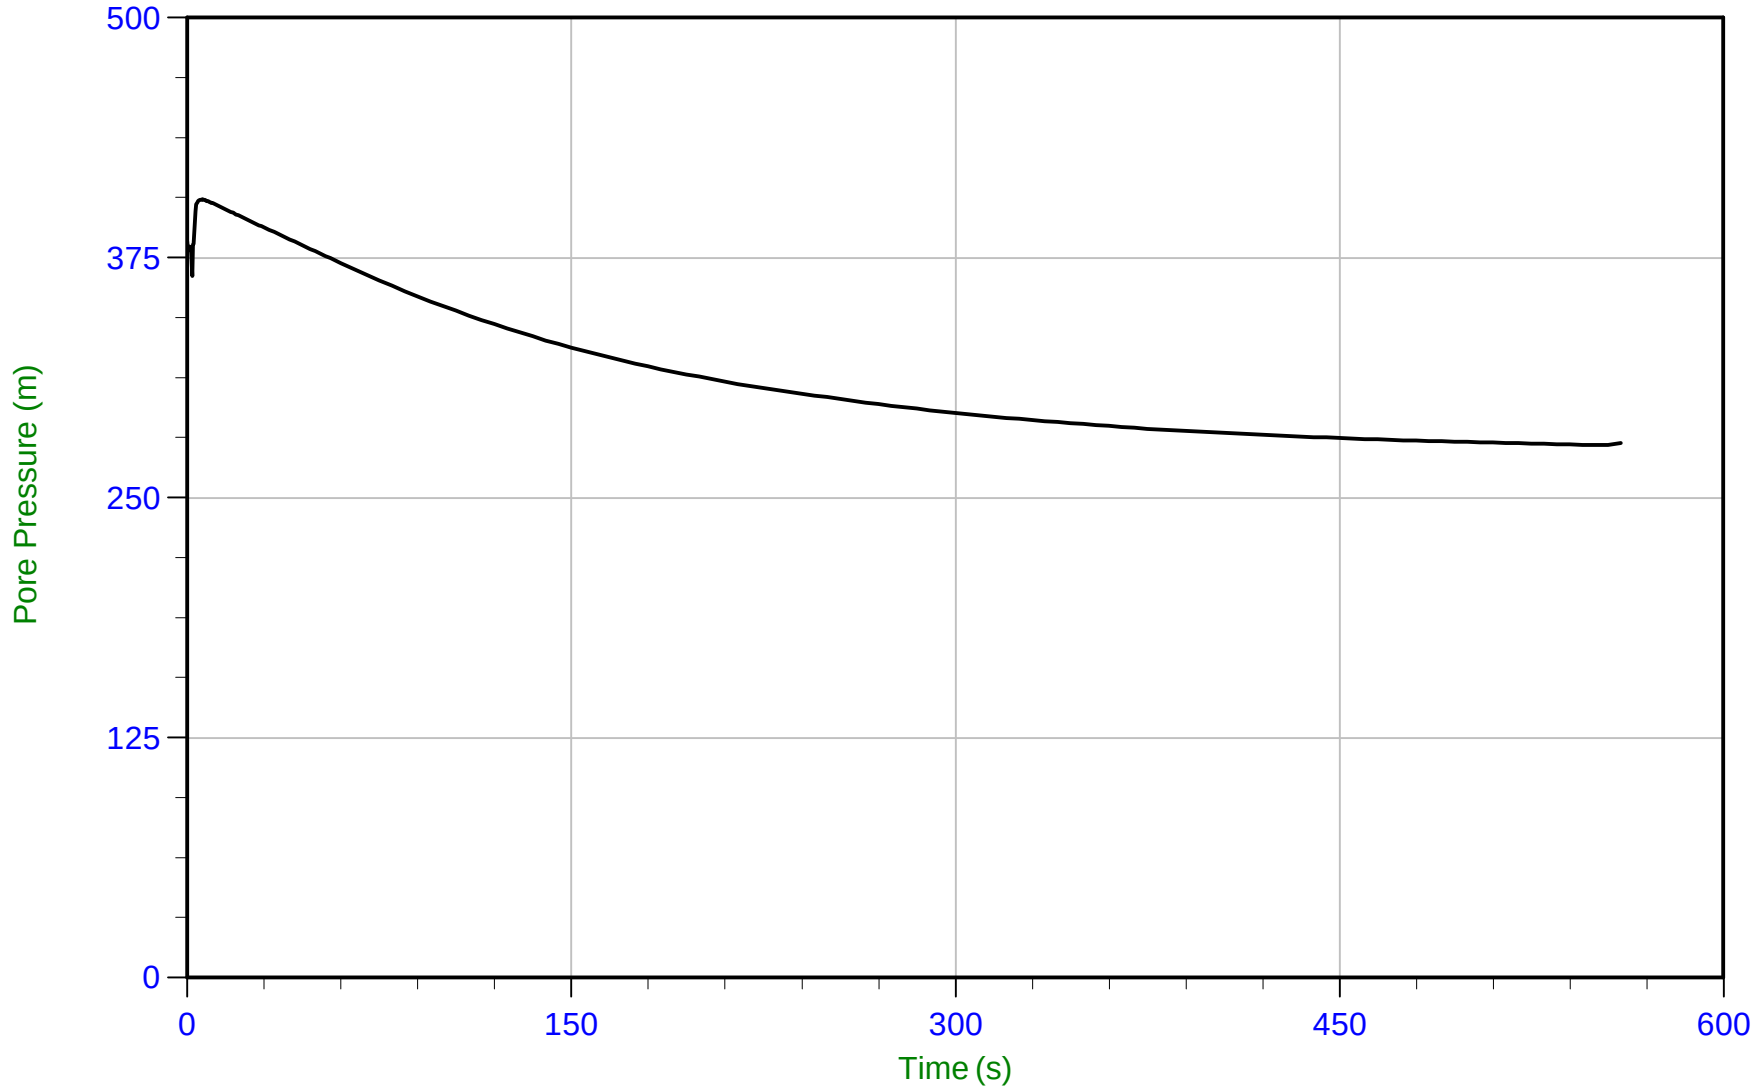

Trace Summary:

Filename: 22-02-23796_RP22-22CPT147.PPF
Depth: 9.525 m / 31.250 ft
Duration: 560.0 s


u Min: 277.4 m
u Max: 405.3 m
u Final: 278.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 15:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT148
Cone: 750:T1500F15U35 Area=15 cm²

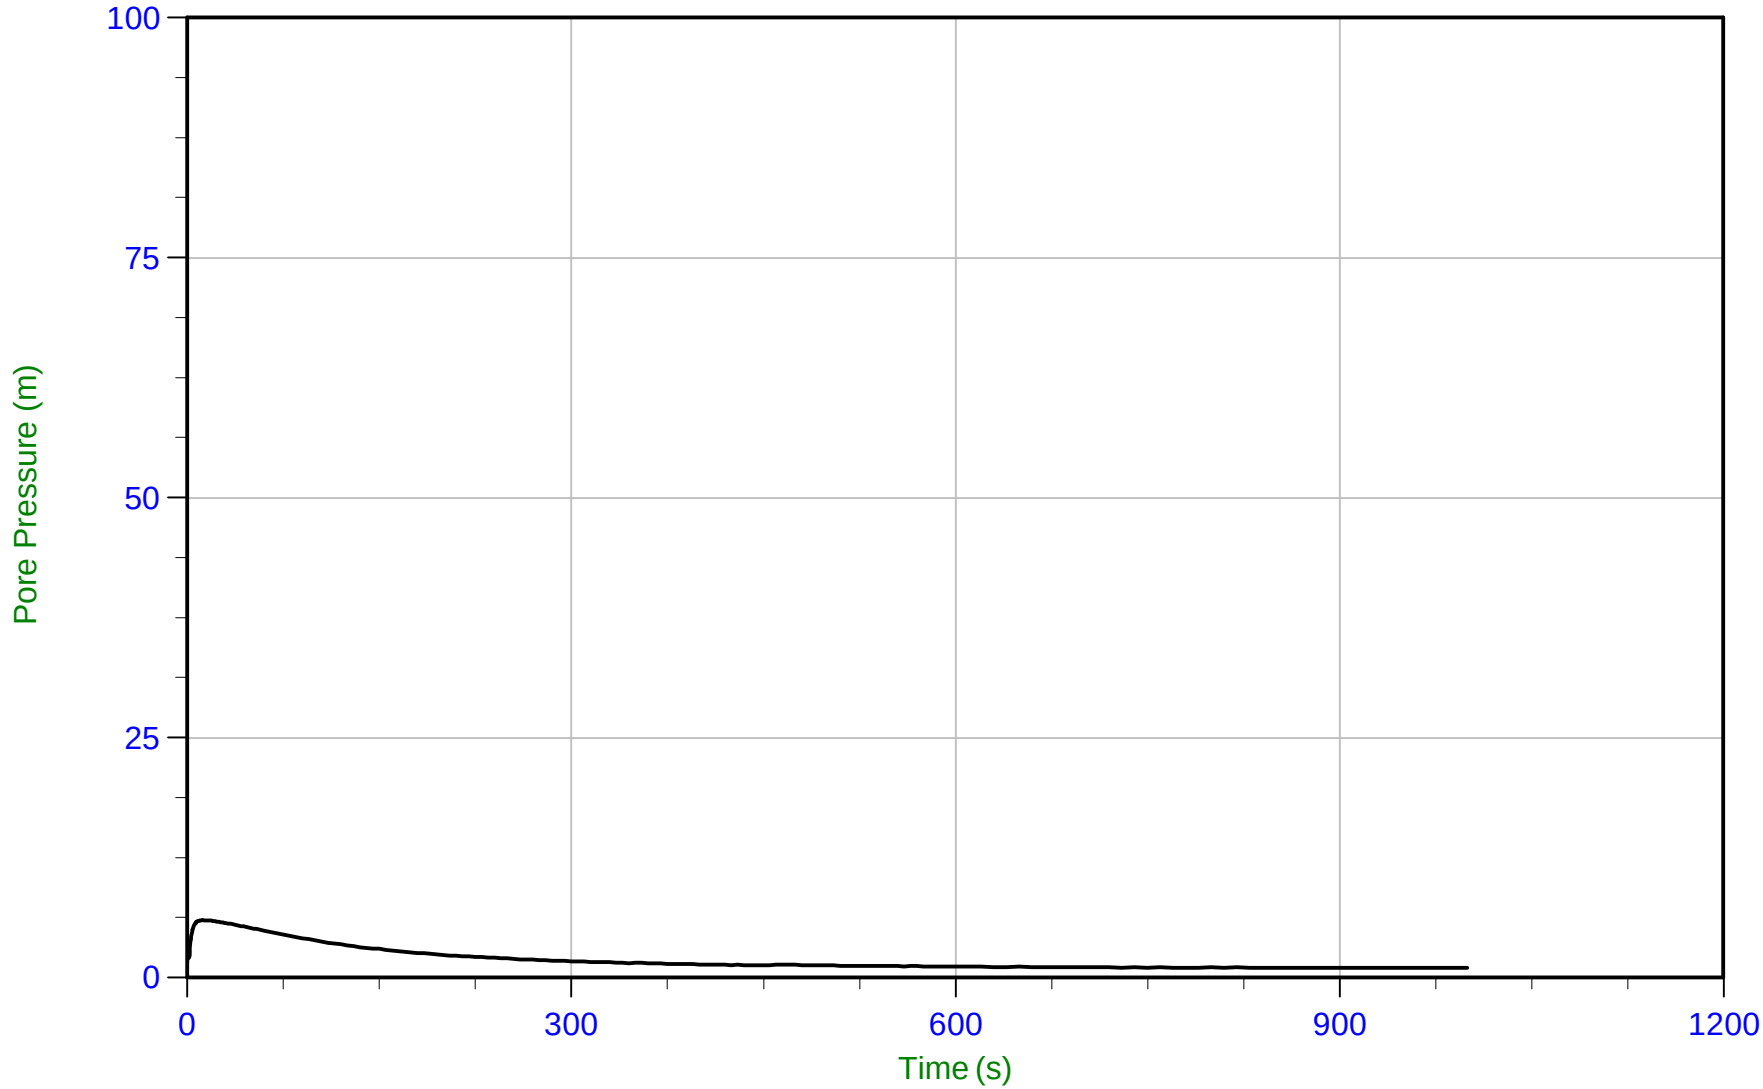

Trace Summary:

Filename: 22-02-23796_RP22-22CPT148.PPF
Depth: 3.950 m / 12.959 ft
Duration: 1000.0 s

u Min: 1.0 m
u Max: 6.0 m
u Final: 1.1 m


WT: 2.845 m / 9.334 ft
Ueq: 1.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/20/2022 15:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT148
Cone: 750:T1500F15U35 Area=15 cm²

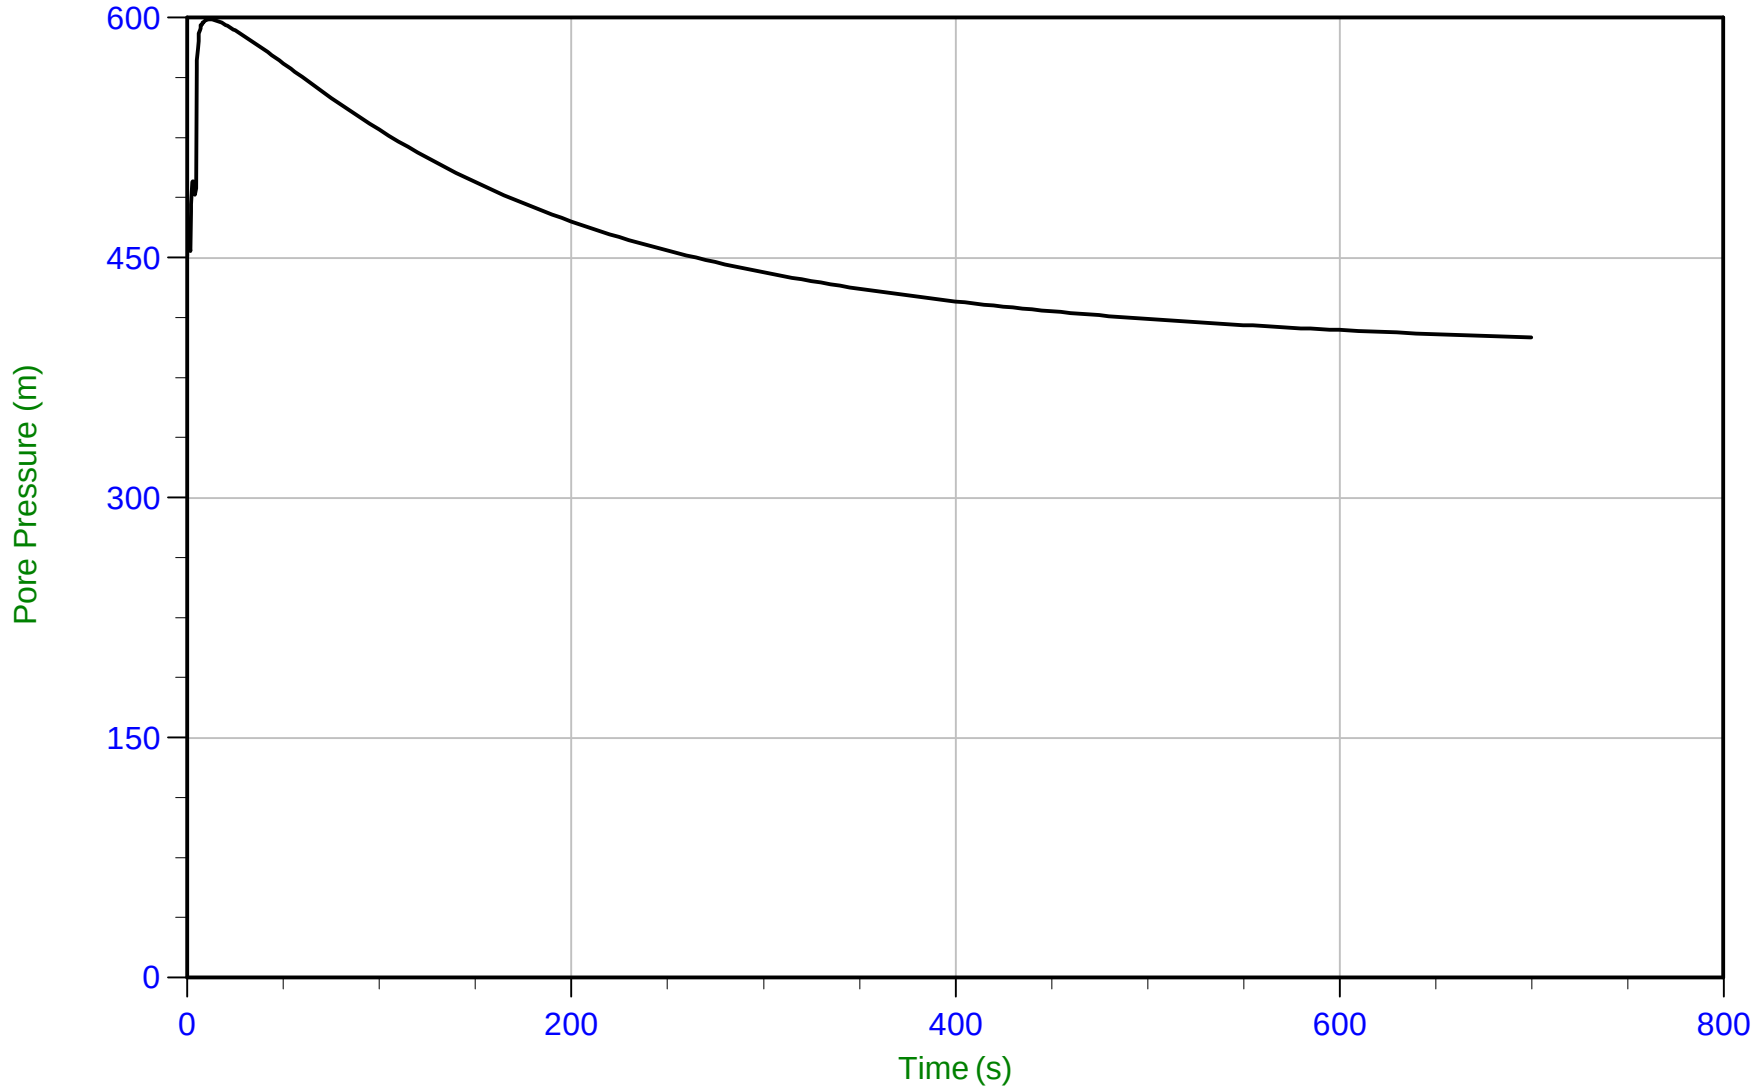

Trace Summary:

Filename: 22-02-23796_RP22-22CPT148.PPF
Depth: 9.175 m / 30.101 ft
Duration: 700.0 s


u Min: 400.2 m
u Max: 599.0 m
u Final: 400.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 09:48
Site: Brooks, Alberta

Sounding: RCPT22-22CPT149
Cone: 750:T1500F15U35 Area=15 cm²

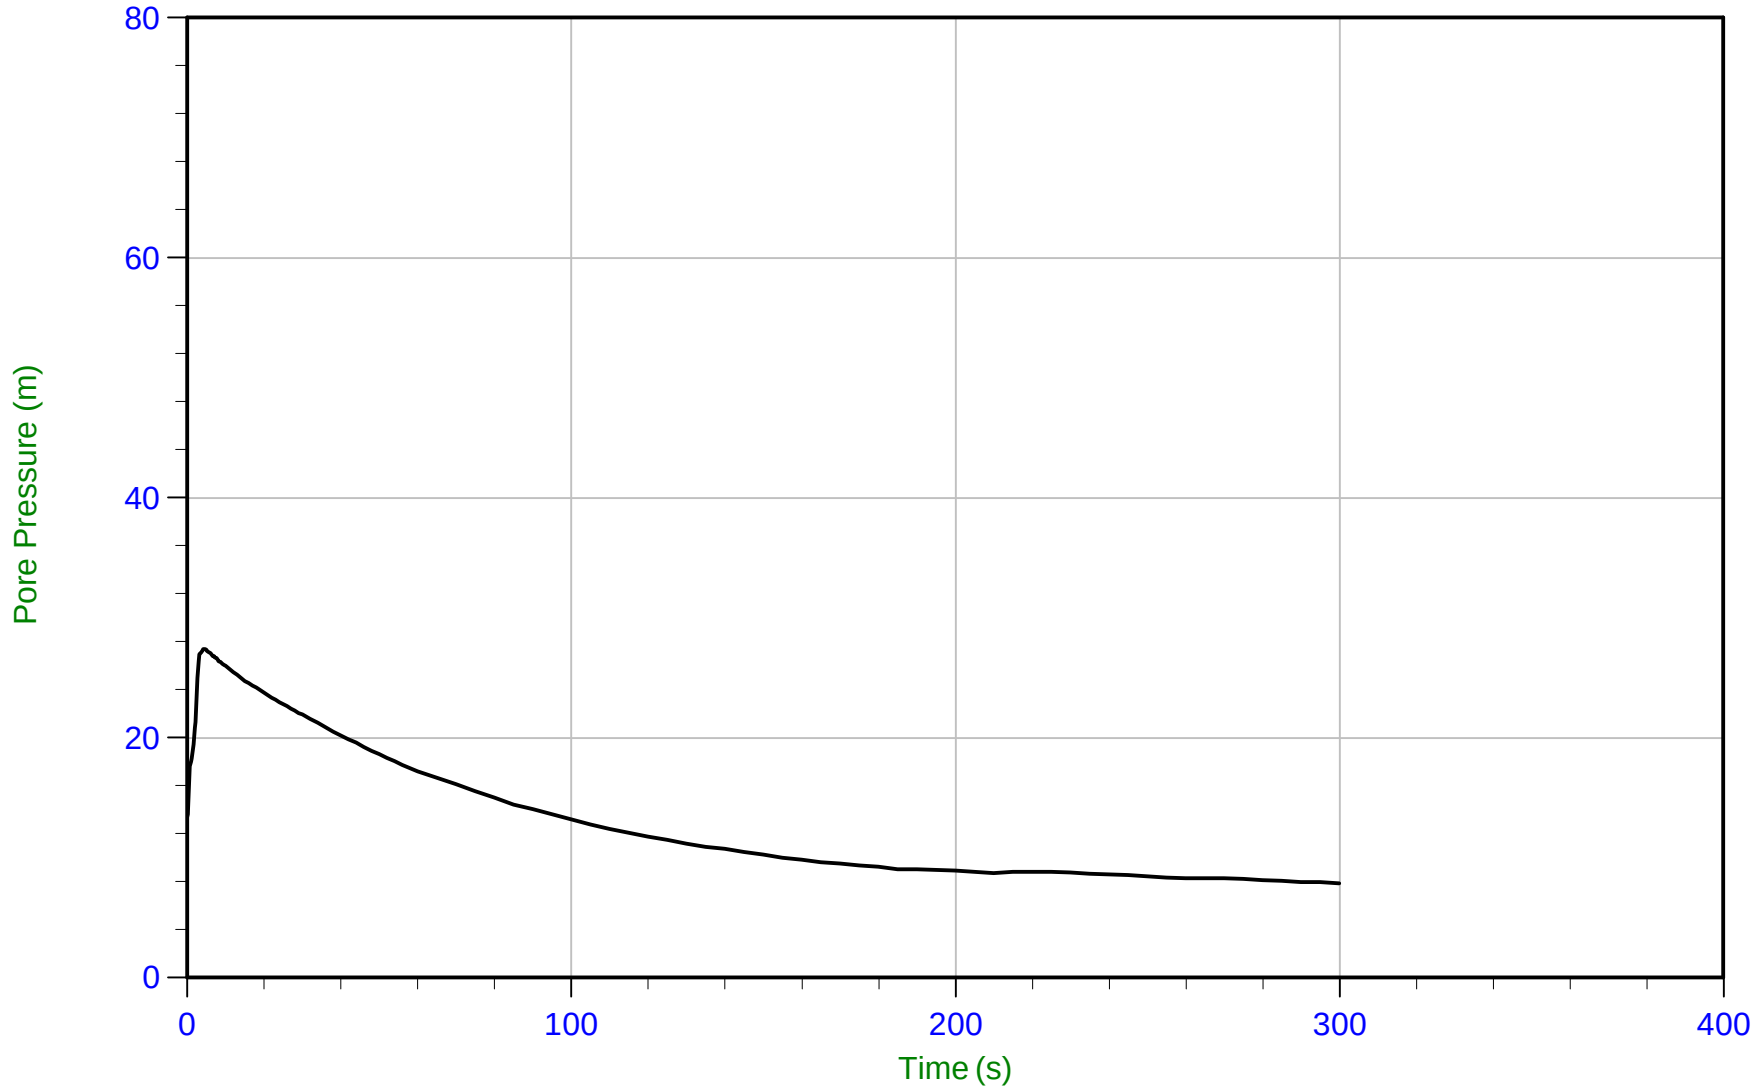

Trace Summary:

Filename: 22-02-23796_RP22-22CPT149.PPF
Depth: 3.875 m / 12.713 ft
Duration: 300.0 s


u Min: 7.9 m
u Max: 27.4 m
u Final: 7.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 09:48
Site: Brooks, Alberta

Sounding: RCPT22-22CPT149
Cone: 750:T1500F15U35 Area=15 cm²

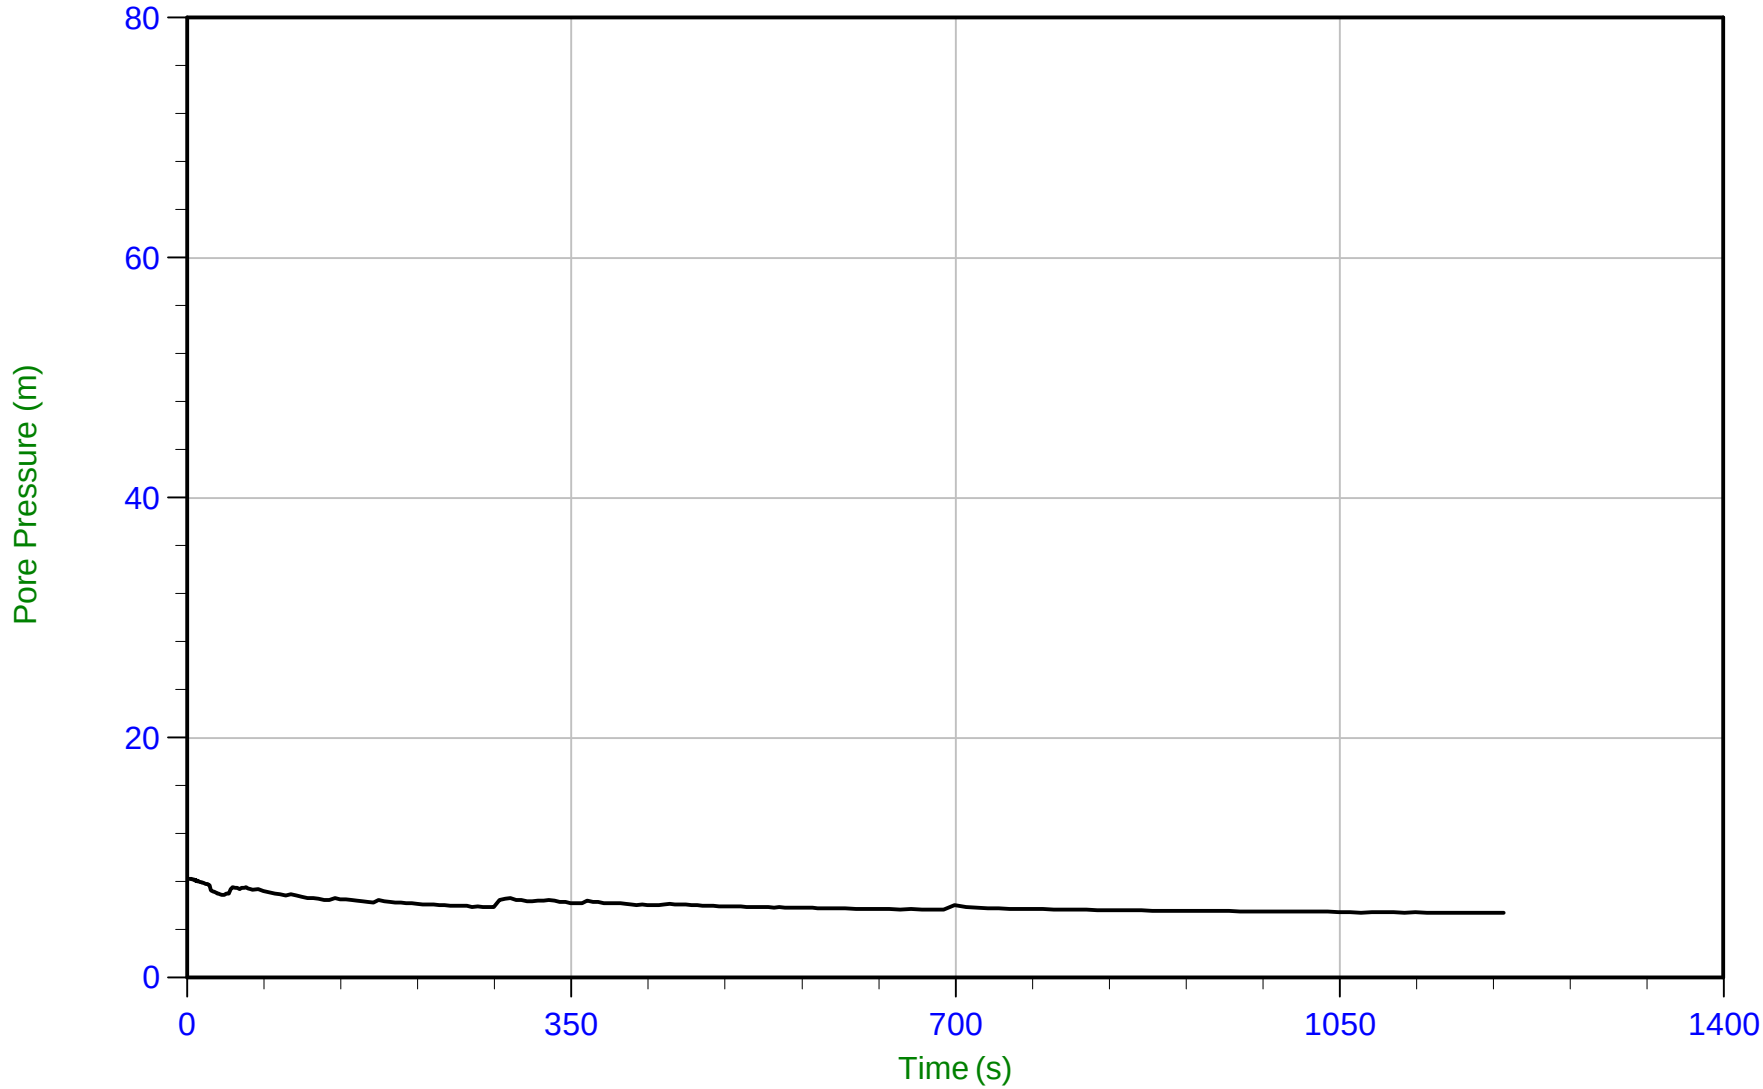

Trace Summary:

Filename: 22-02-23796_RP22-22CPT149.PPF
Depth: 6.000 m / 19.685 ft
Duration: 1200.0 s


u Min: 5.4 m
u Max: 8.3 m
u Final: 5.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 07:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT150
Cone: 750:T1500F15U35 Area=15 cm²

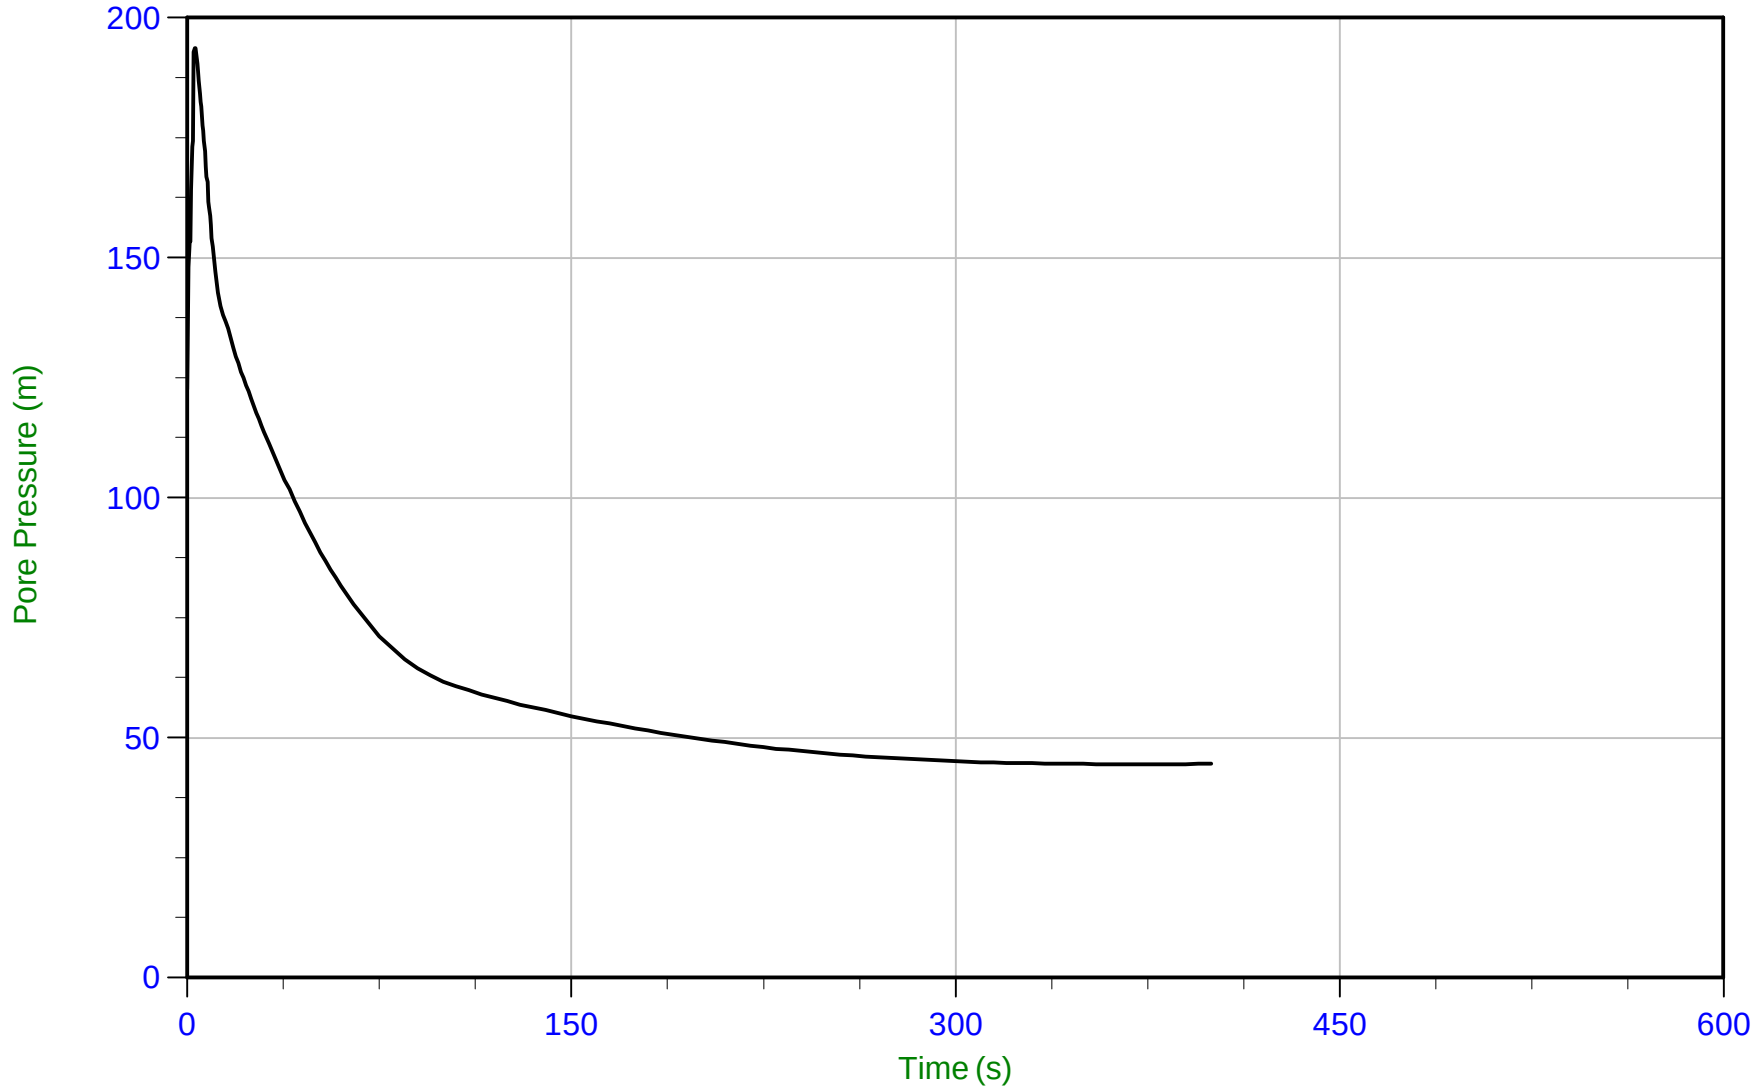

Trace Summary:

Filename: 22-02-23796_RP22-22CPT150.PPF
Depth: 5.850 m / 19.193 ft
Duration: 400.0 s

u Min: 44.5 m
u Max: 193.7 m
u Final: 44.6 m

WT: 2.000 m / 6.562 ft
Ueq: 3.9 m
U(50): 98.75 m


T(50): 39.5 s
Ir: 100
Ch: 17.8 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 07:13
Site: Brooks, Alberta

Sounding: RCPT22-22CPT150
Cone: 750:T1500F15U35 Area=15 cm²

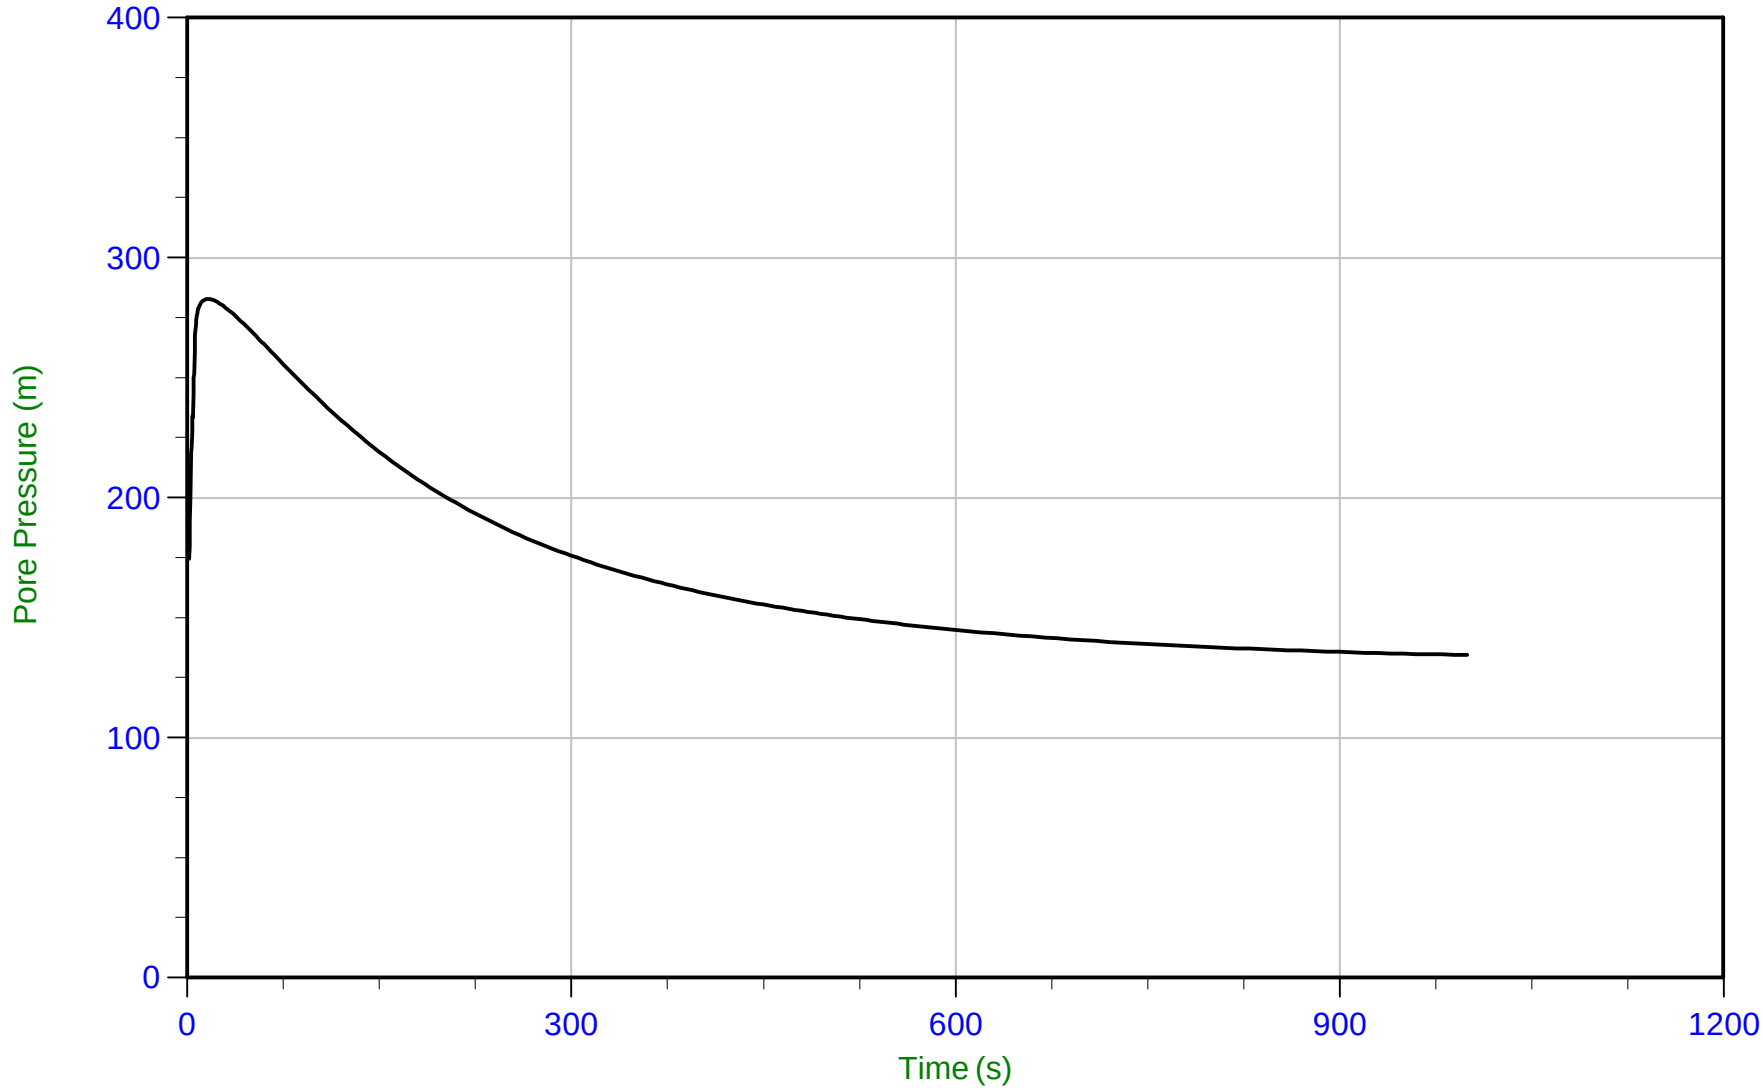

Trace Summary:

Filename: 22-02-23796_RP22-22CPT150.PPF
Depth: 8.700 m / 28.543 ft
Duration: 1000.0 s


u Min: 134.4 m
u Max: 282.8 m
u Final: 134.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 15:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT151
Cone: 750:T1500F15U35 Area=15 cm²

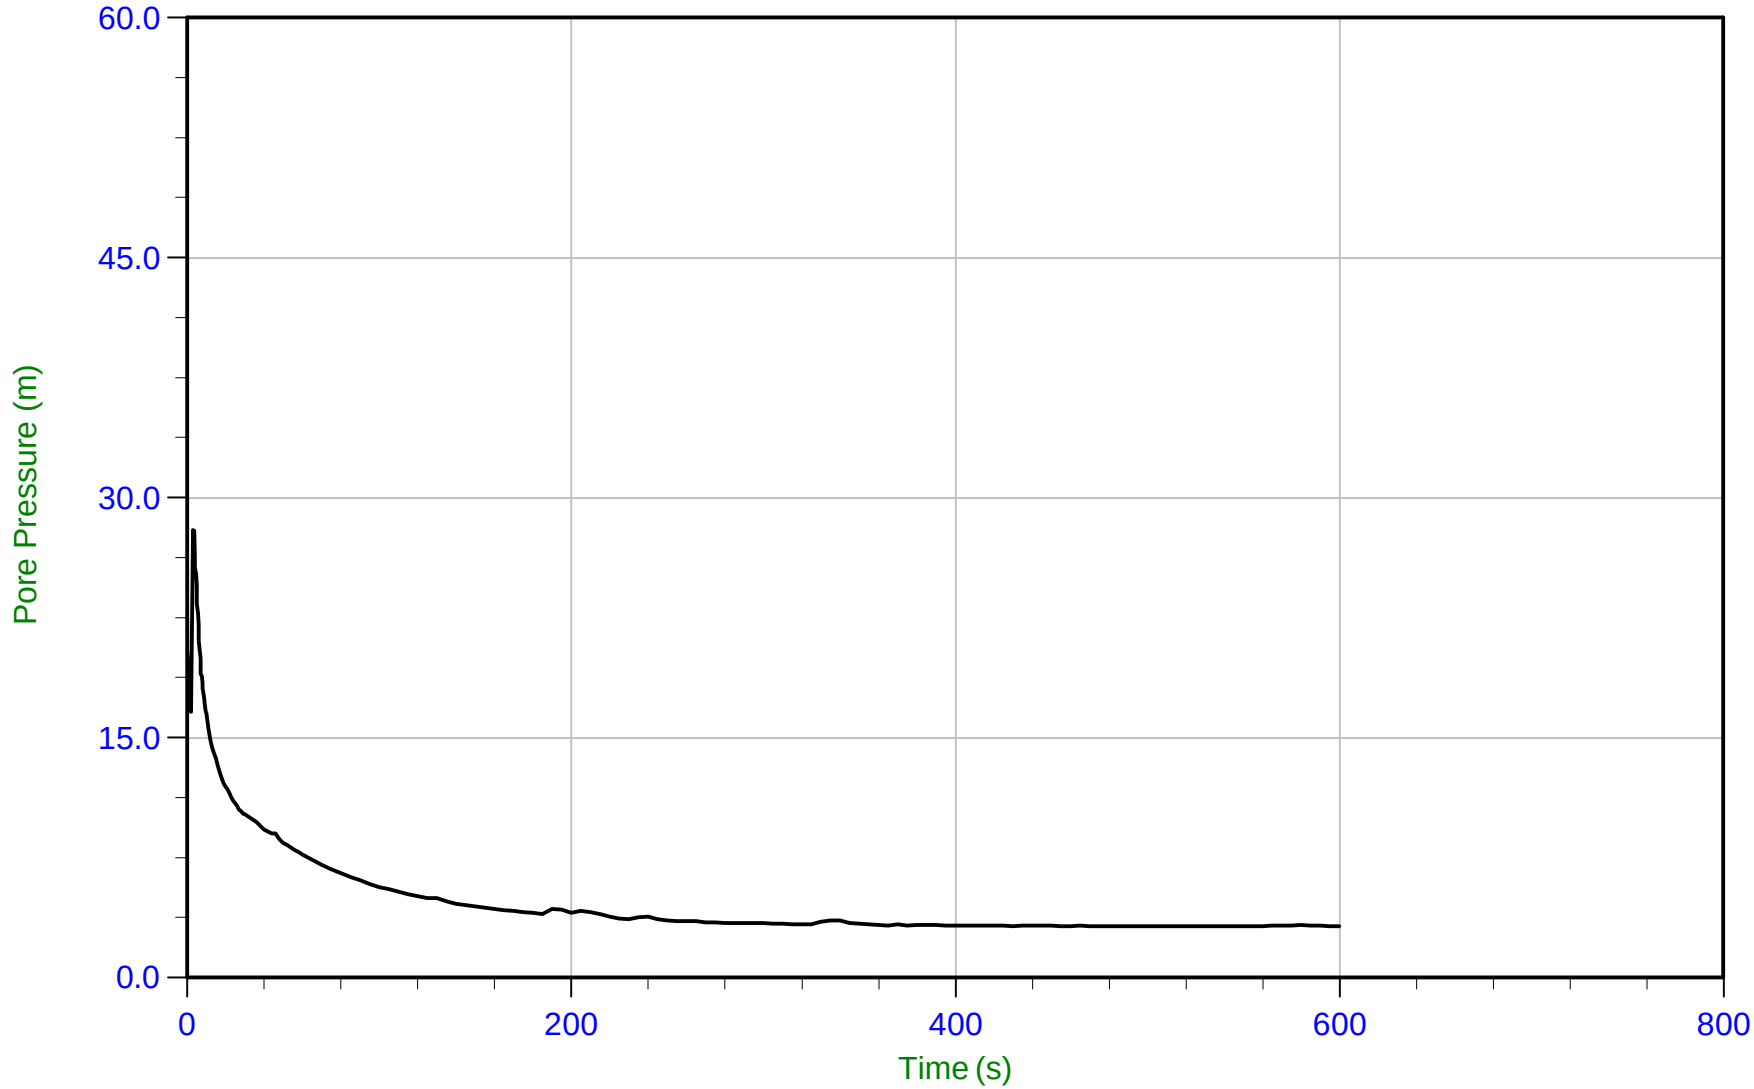

Trace Summary:

Filename: 22-02-23796_RP22-22CPT151.PPF
Depth: 5.800 m / 19.029 ft
Duration: 600.0 s

u Min: 3.2 m
u Max: 28.0 m
u Final: 3.2 m


WT: 2.603 m / 8.540 ft
Ueq: 3.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 15:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT151
Cone: 750:T1500F15U35 Area=15 cm²

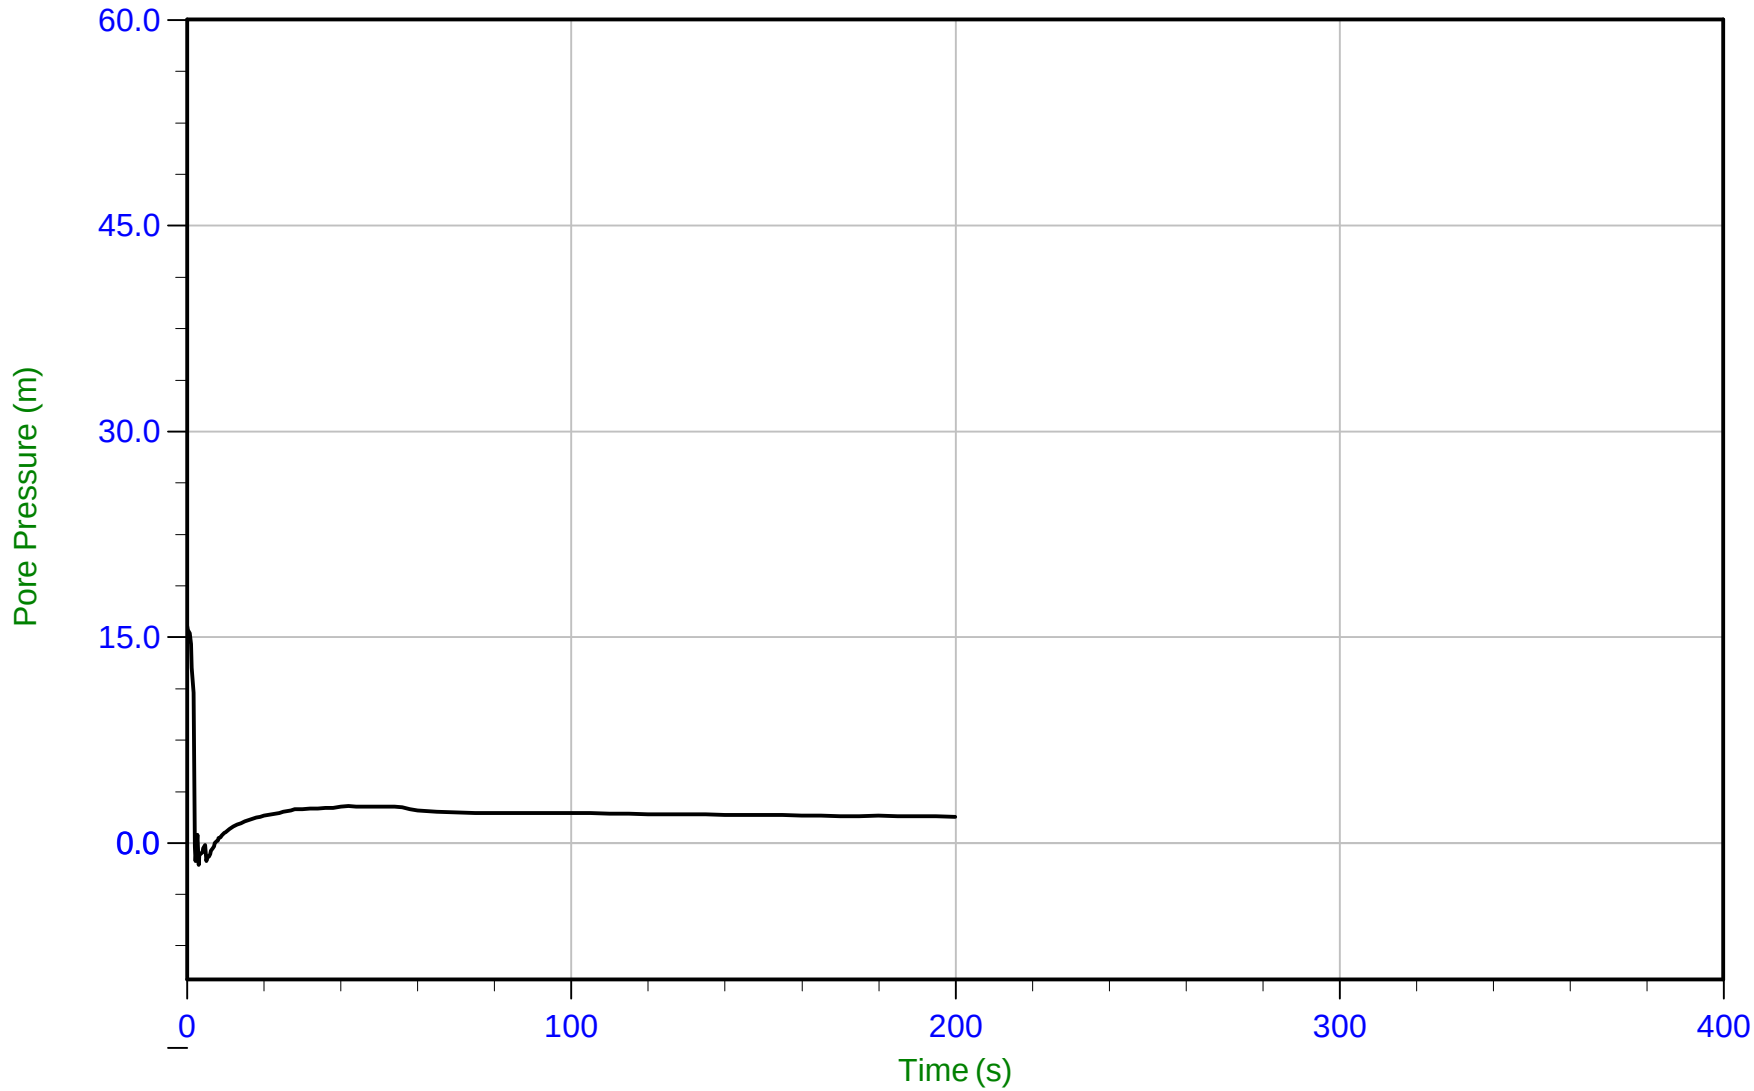

Trace Summary:

Filename: 22-02-23796_RP22-22CPT151.PPF
Depth: 6.300 m / 20.669 ft
Duration: 200.0 s

u Min: -1.6 m
u Max: 15.8 m
u Final: 1.9 m


WT: 4.392 m / 14.409 ft
Ueq: 1.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 13:16
Site: Brooks, Alberta

Sounding: RCPT22-22CPT152
Cone: 750:T1500F15U35 Area=15 cm²

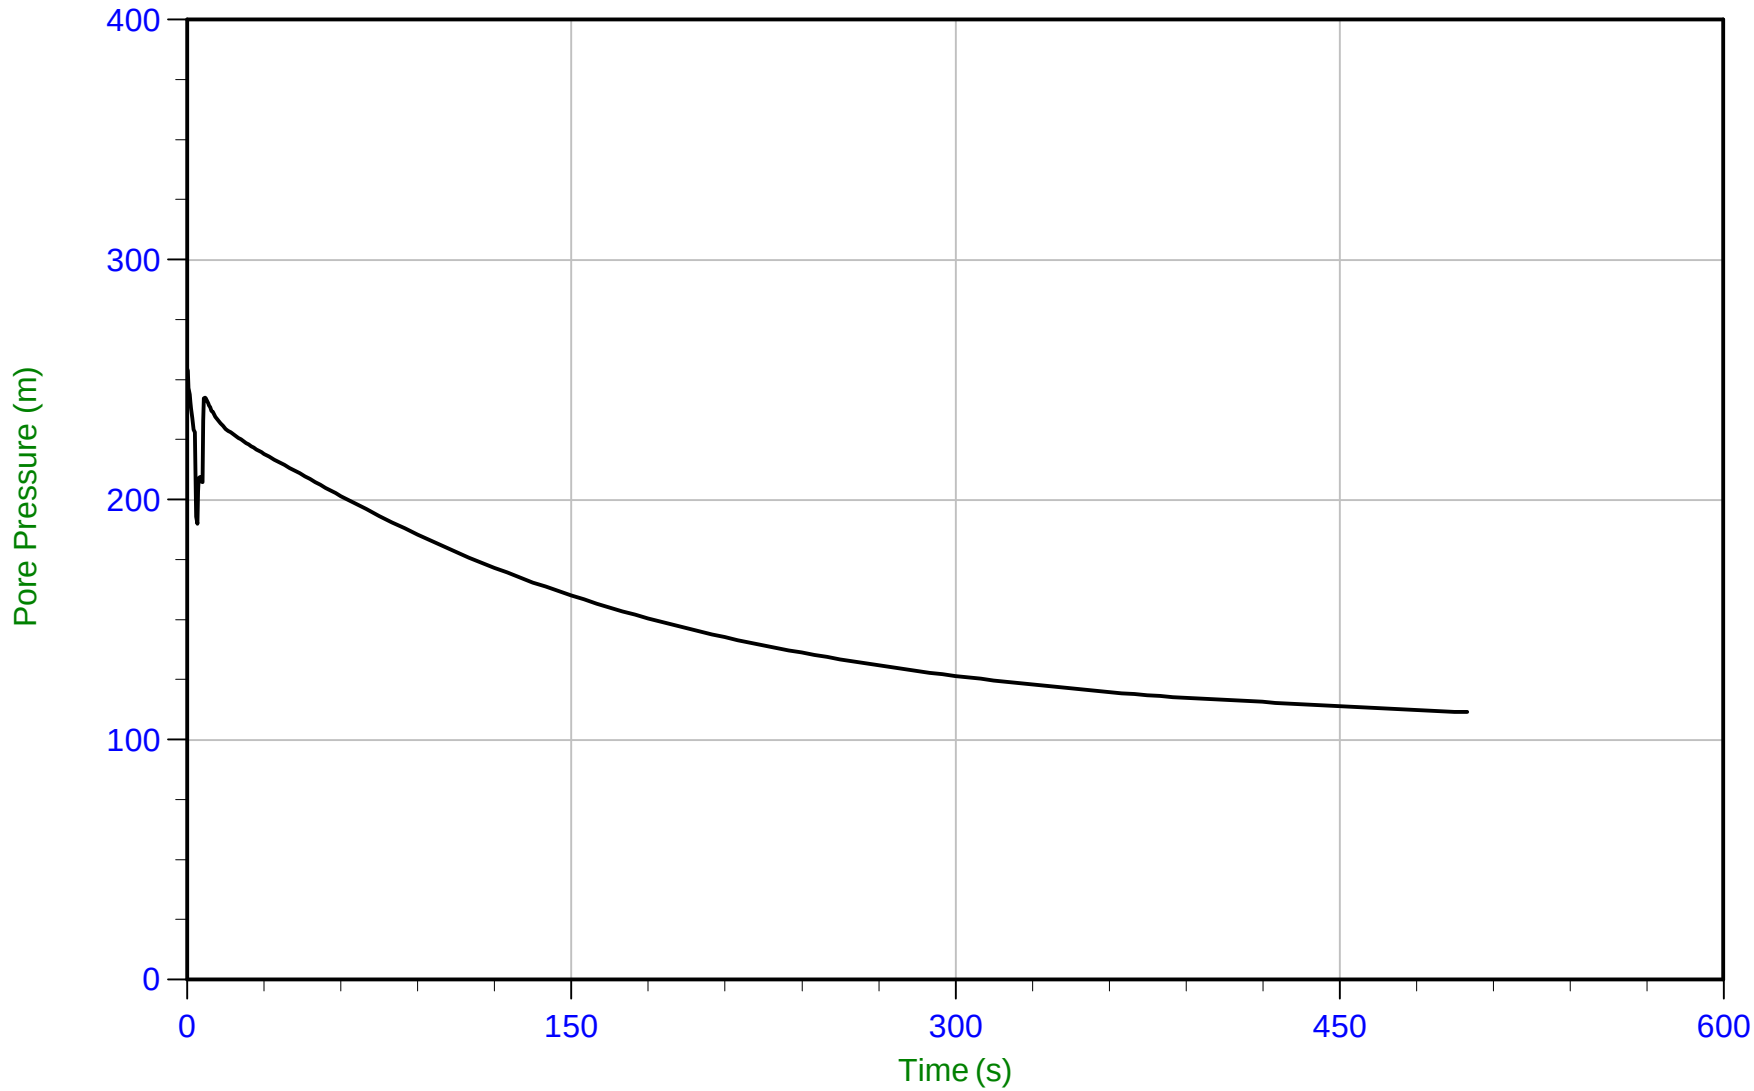

Trace Summary:

Filename: 22-02-23796_RP22-22CPT152.PPF
Depth: 5.775 m / 18.947 ft
Duration: 500.0 s


u Min: 111.5 m
u Max: 254.6 m
u Final: 111.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 10:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT153A
Cone: 750:T1500F15U35 Area=15 cm²

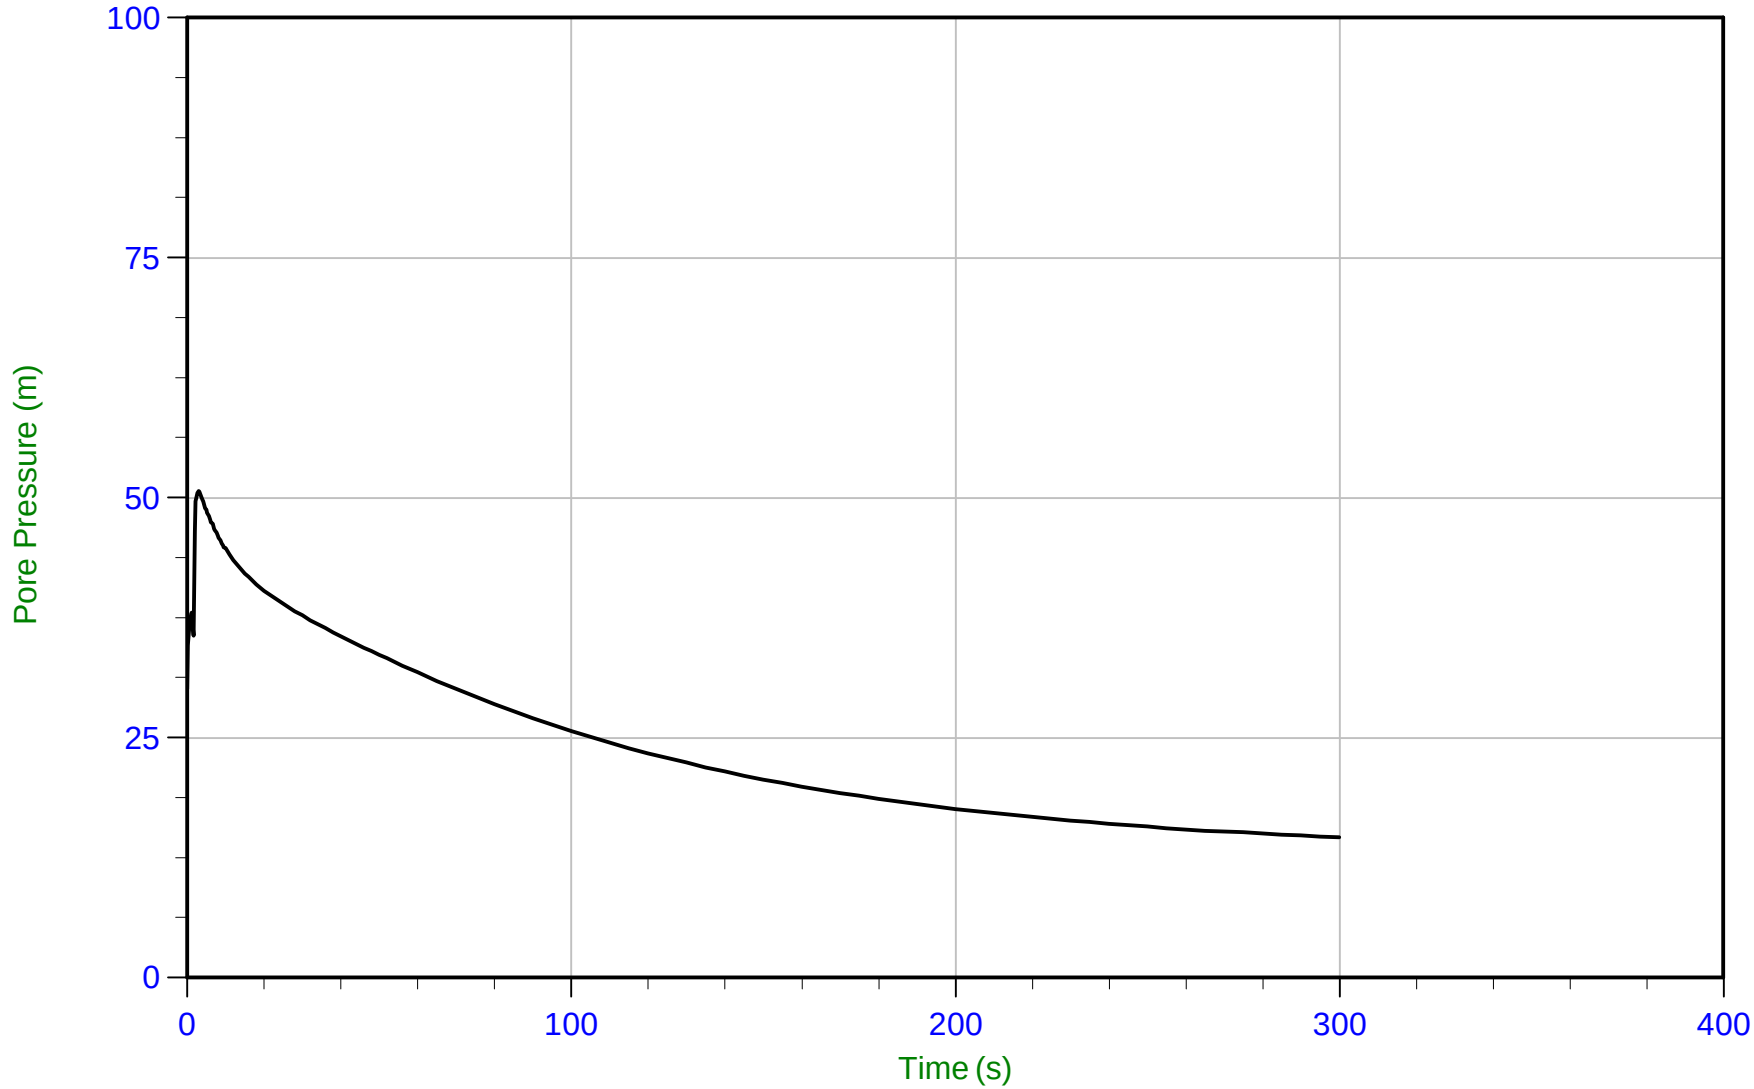

Trace Summary:

Filename: 22-02-23796_RP22-22CPT153A.PPF
Depth: 6.725 m / 22.063 ft
Duration: 300.0 s


u Min: 14.6 m
u Max: 50.7 m
u Final: 14.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 07:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT154
Cone: 750:T1500F15U35 Area=15 cm²

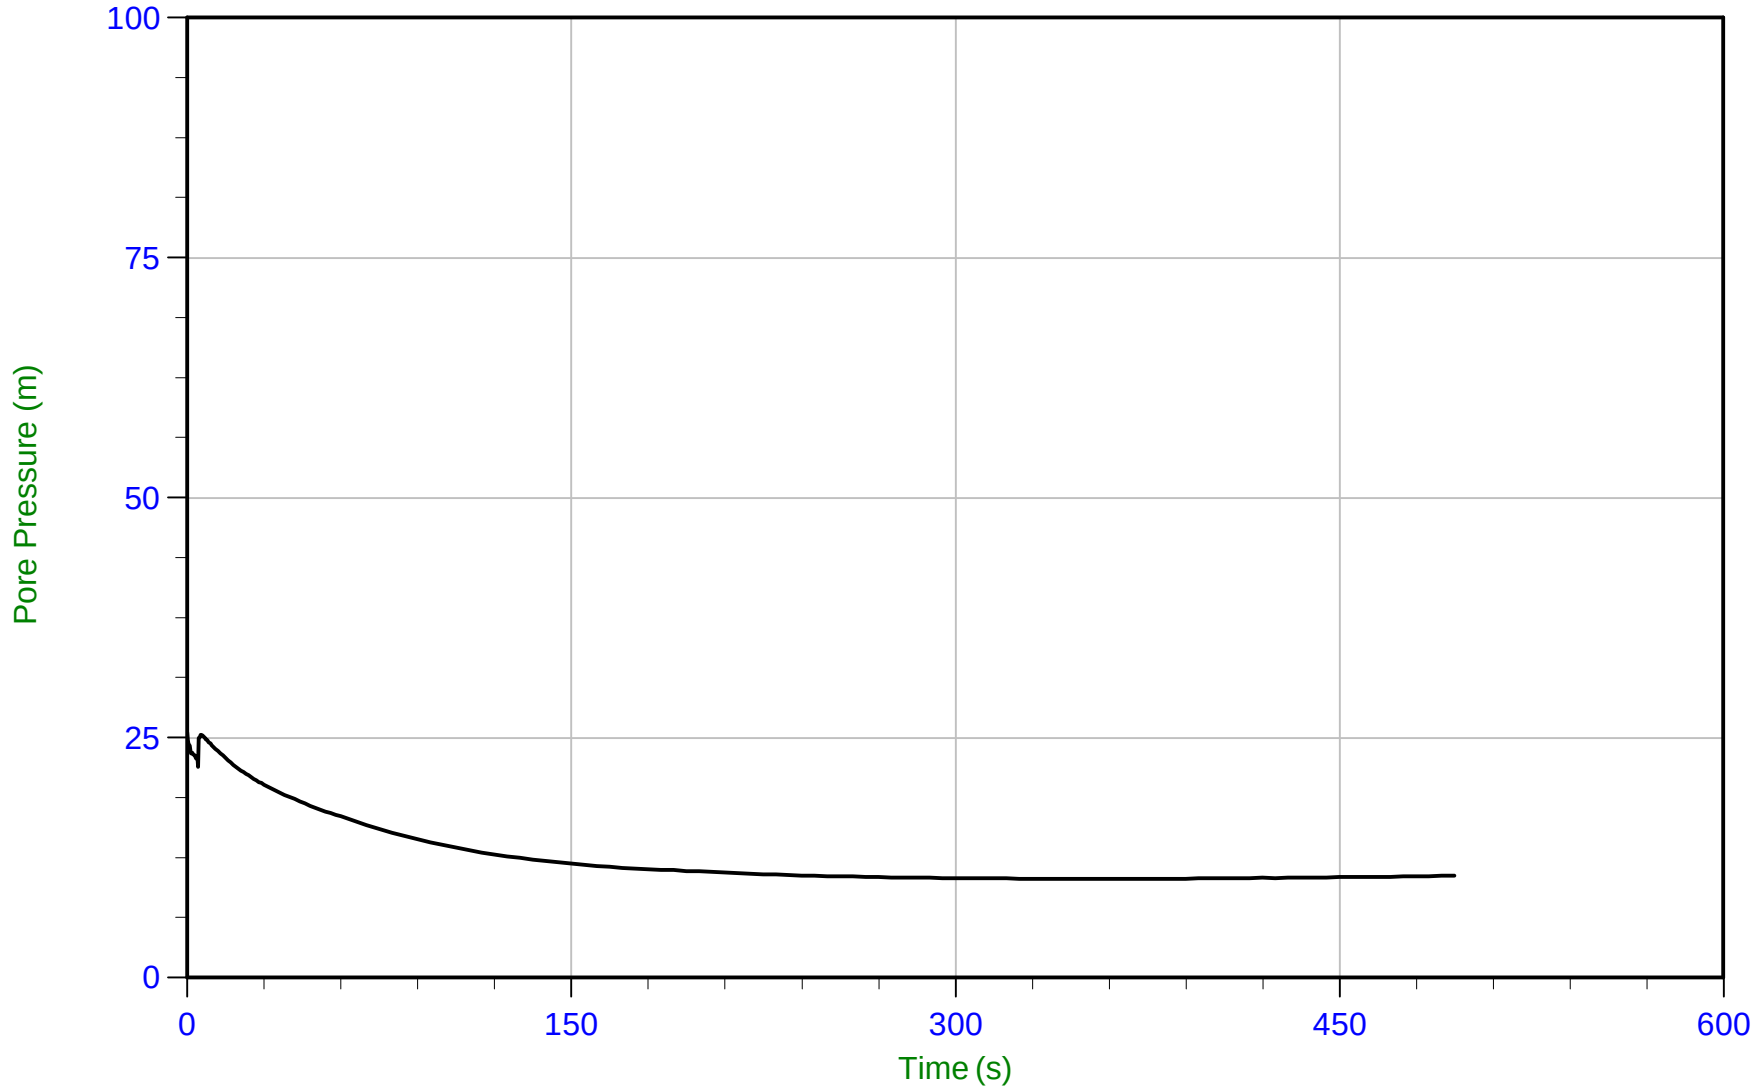

Trace Summary:

Filename: 22-02-23796_RP22-22CPT154.PPF
Depth: 6.800 m / 22.309 ft
Duration: 495.0 s


u Min: 10.3 m
u Max: 25.6 m
u Final: 10.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/21/2022 07:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT154
Cone: 750:T1500F15U35 Area=15 cm²

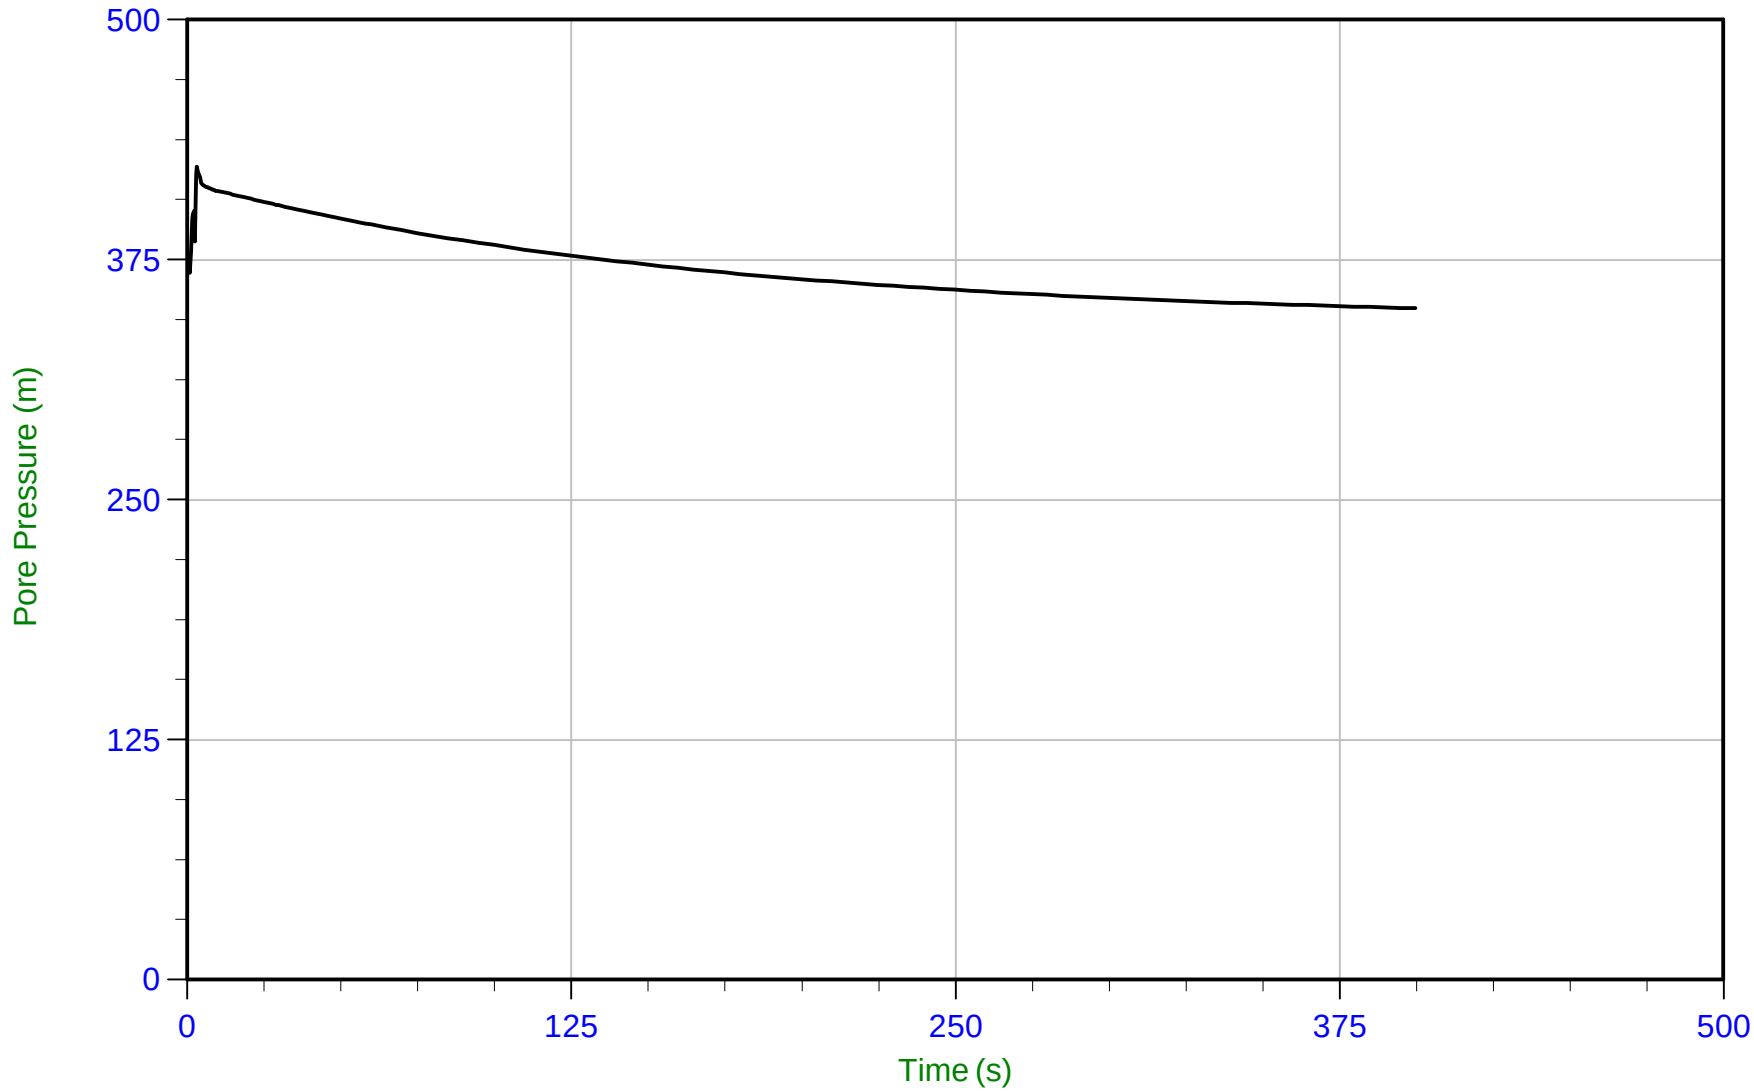

Trace Summary:

Filename: 22-02-23796_RP22-22CPT154.PPF
Depth: 9.225 m / 30.265 ft
Duration: 400.0 s


u Min: 349.7 m
u Max: 423.5 m
u Final: 349.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 12:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT155
Cone: 750:T1500F15U35 Area=15 cm²

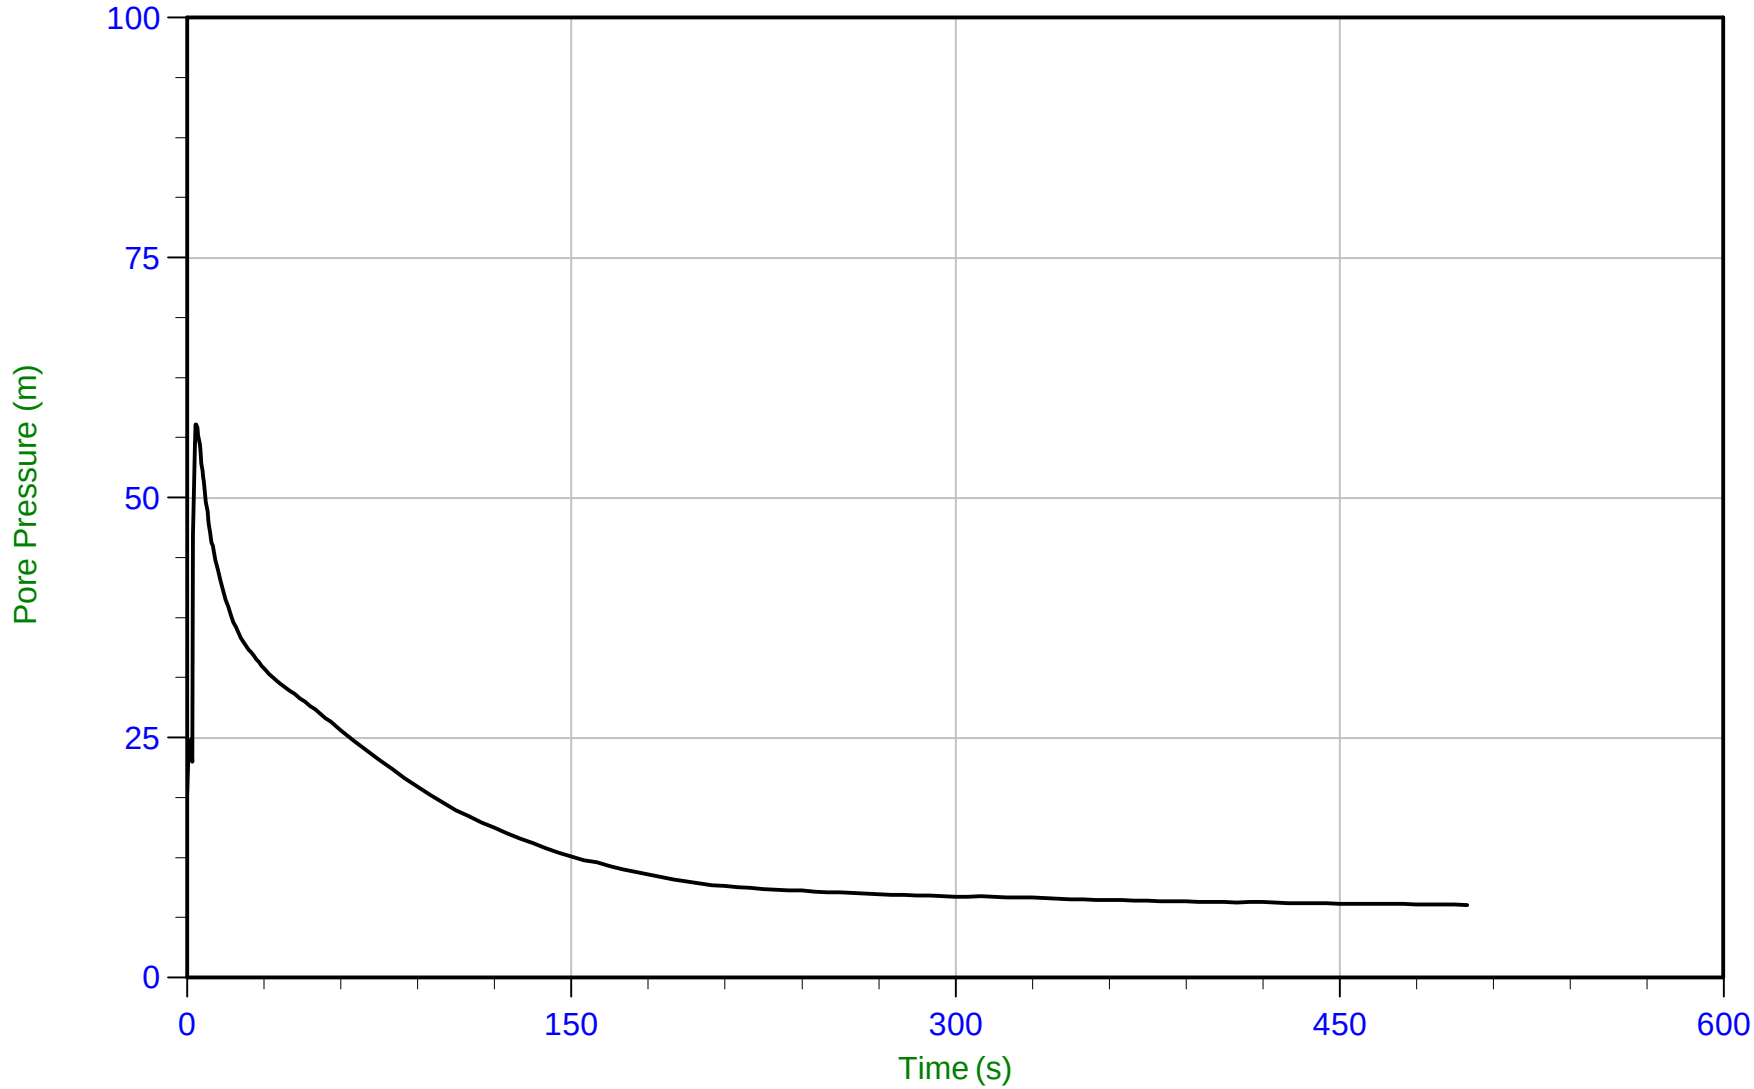

Trace Summary:

Filename: 22-02-23796_RP22-22CPT155.PPF
Depth: 5.775 m / 18.947 ft
Duration: 500.0 s

u Min: 7.6 m
u Max: 57.6 m
u Final: 7.6 m


WT: 3.300 m / 10.827 ft
Ueq: 2.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 12:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT155
Cone: 750:T1500F15U35 Area=15 cm²

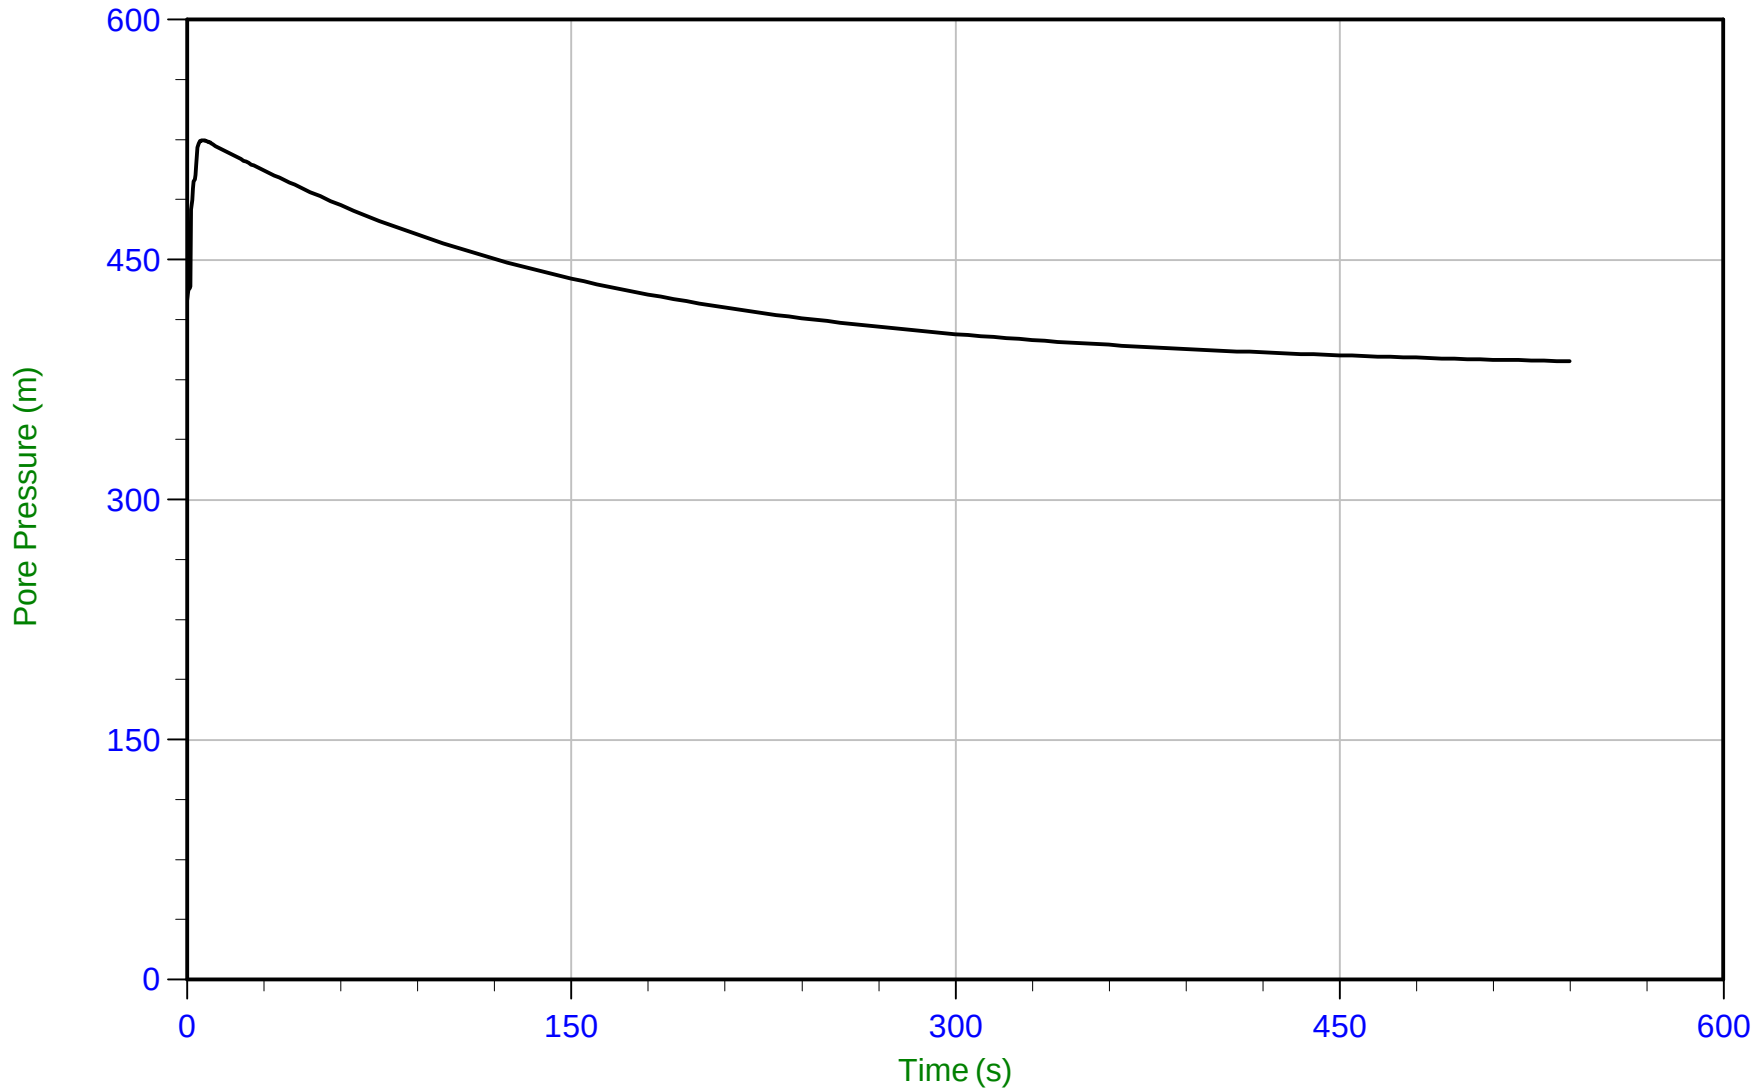

Trace Summary:

Filename: 22-02-23796_RP22-22CPT155.PPF
Depth: 8.900 m / 29.199 ft
Duration: 540.0 s


u Min: 386.6 m
u Max: 524.8 m
u Final: 386.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT156
Cone: 750:T1500F15U35 Area=15 cm²

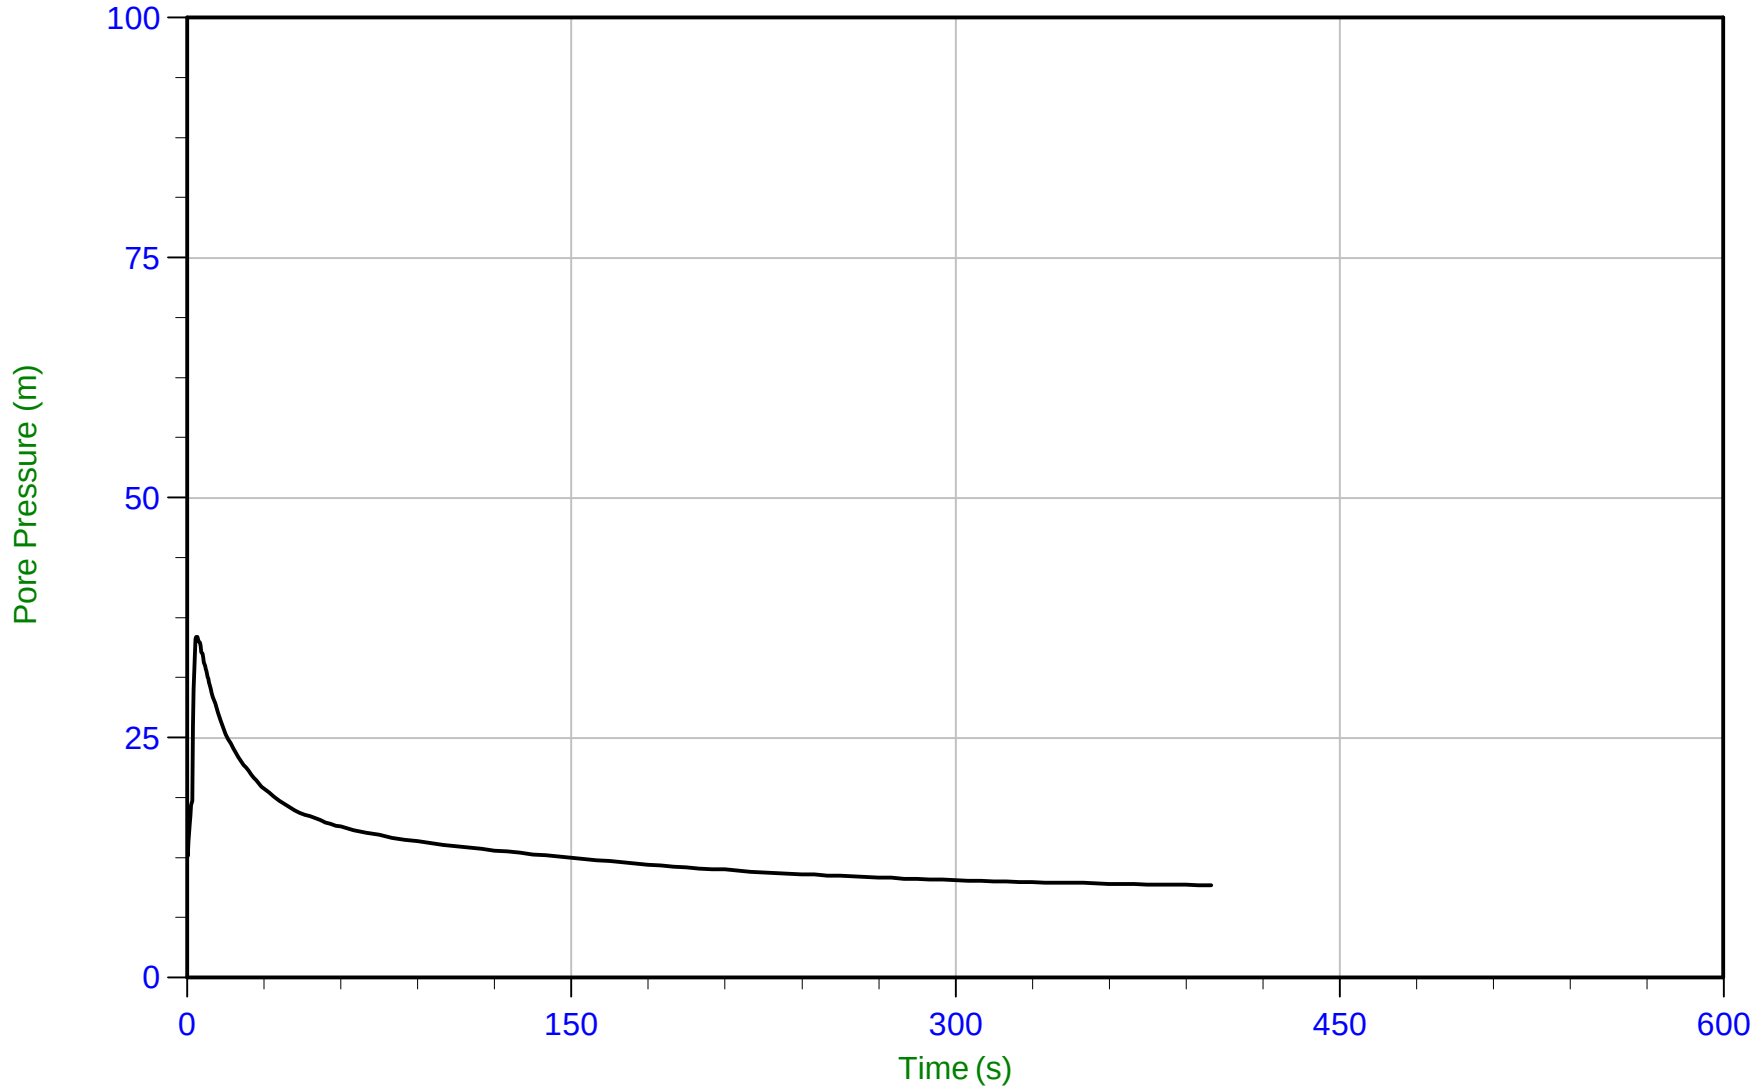

Trace Summary:

Filename: 22-02-23796_RP22-22CPT156.PPF
Depth: 4.900 m / 16.076 ft
Duration: 400.0 s


u Min: 9.6 m
u Max: 35.5 m
u Final: 9.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT156
Cone: 750:T1500F15U35 Area=15 cm²

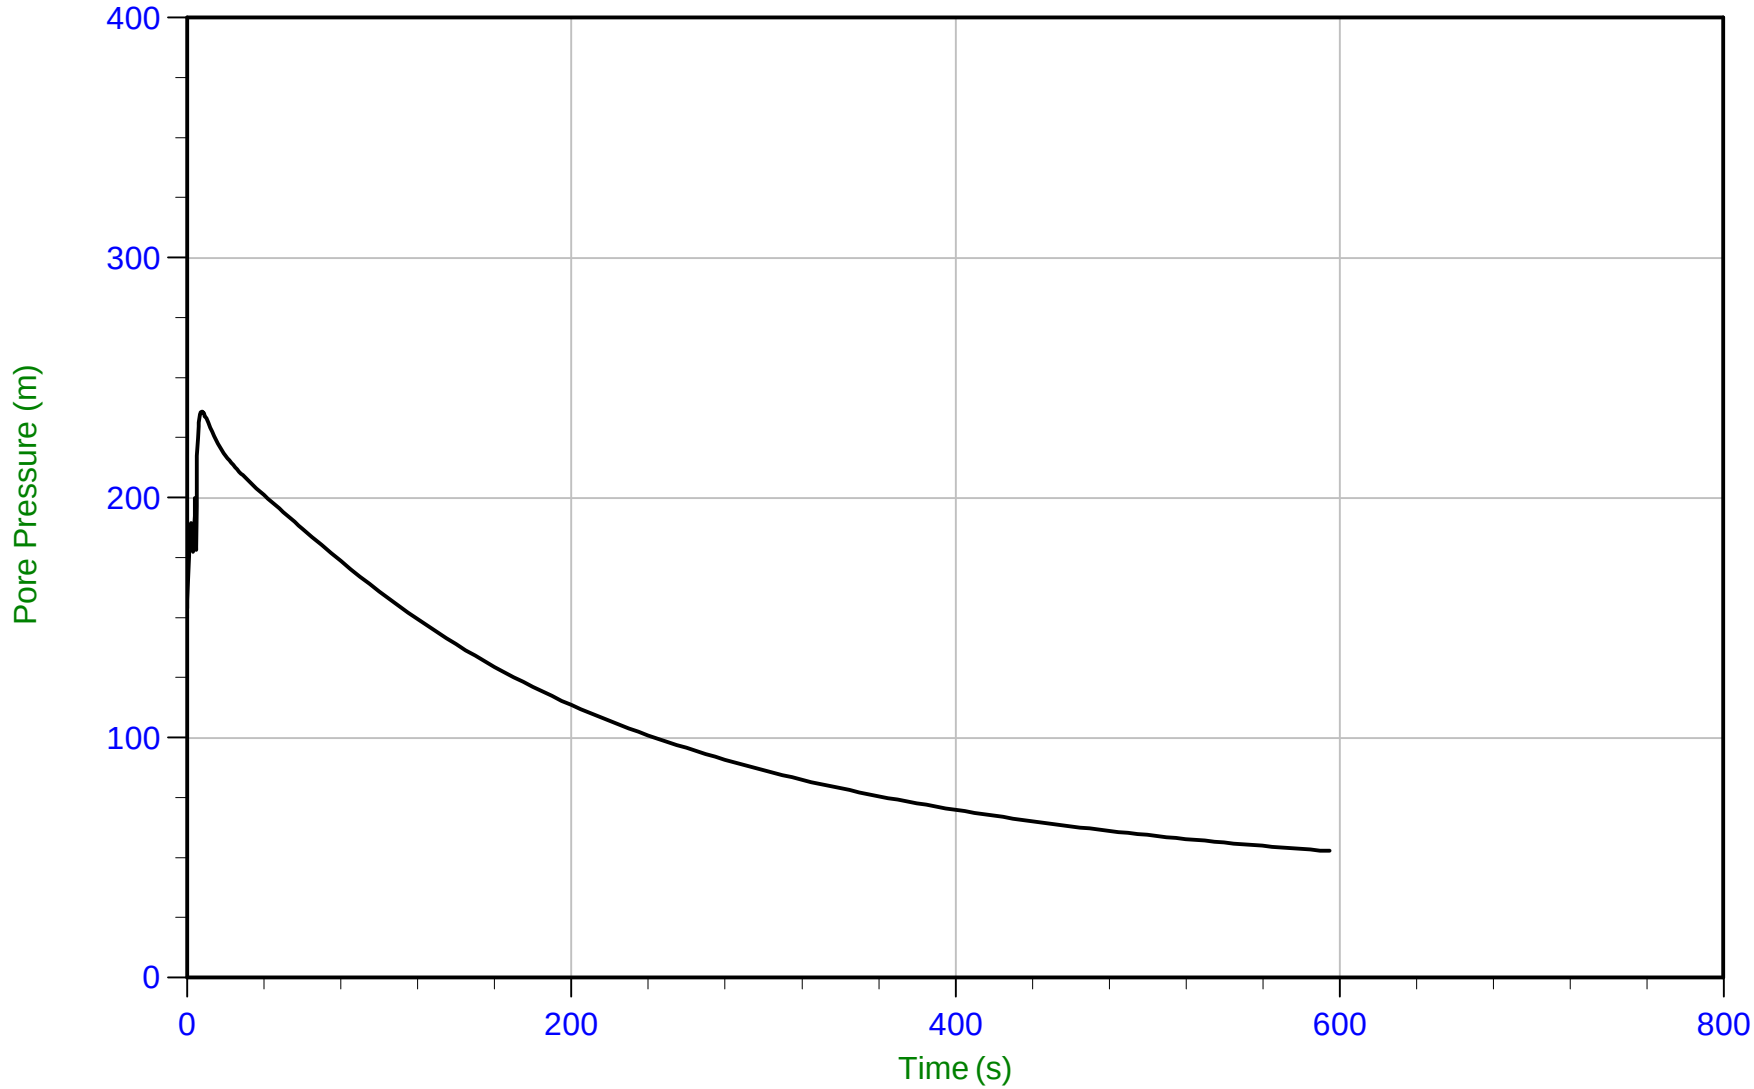

Trace Summary:

Filename: 22-02-23796_RP22-22CPT156.PPF
Depth: 10.200 m / 33.464 ft
Duration: 595.0 s


u Min: 52.8 m
u Max: 235.8 m
u Final: 52.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT157
Cone: 750:T1500F15U35 Area=15 cm²

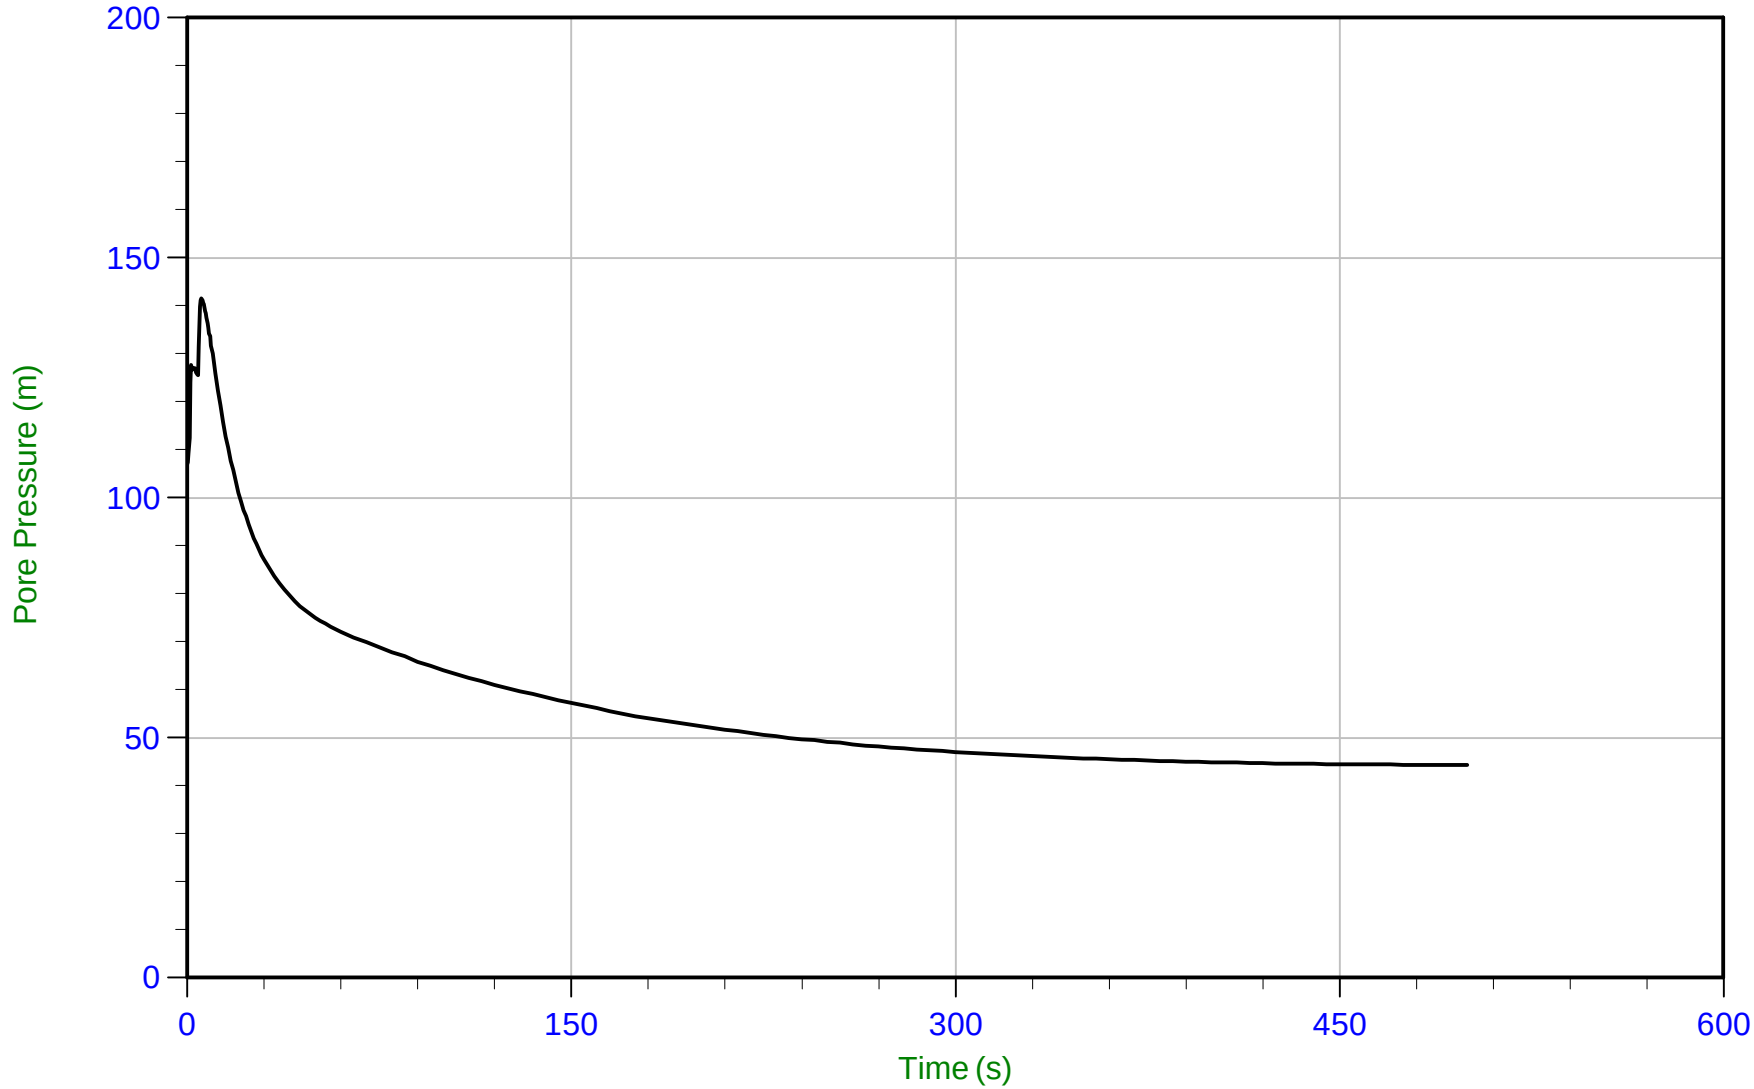

Trace Summary:

Filename: 22-02-23796_RP22-22CPT157.PPF
Depth: 4.900 m / 16.076 ft
Duration: 500.0 s

u Min: 44.3 m
u Max: 141.5 m
u Final: 44.4 m


WT: 1.900 m / 6.234 ft
Ueq: 3.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT157
Cone: 750:T1500F15U35 Area=15 cm²

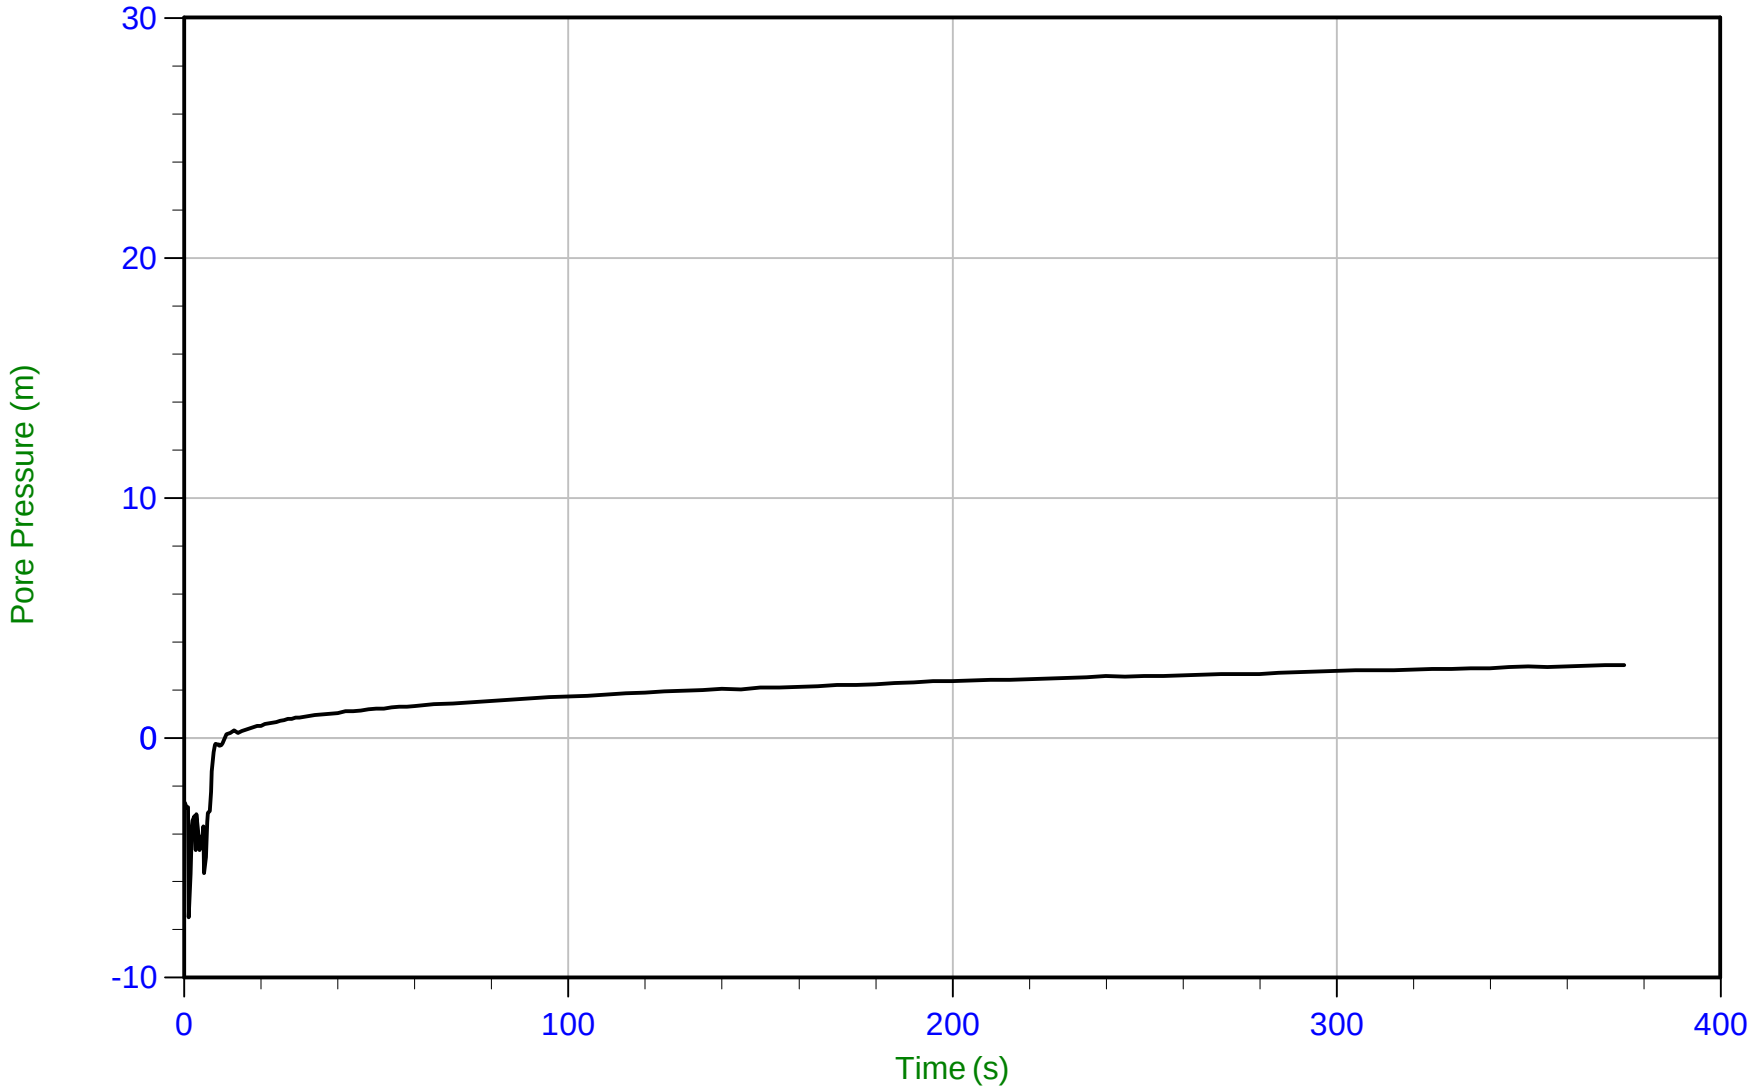

Trace Summary:

Filename: 22-02-23796_RP22-22CPT157.PPF
Depth: 5.175 m / 16.978 ft
Duration: 375.0 s


u Min: -7.5 m
u Max: 3.0 m
u Final: 3.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/22/2022 15:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT158
Cone: 750:T1500F15U35 Area=15 cm²

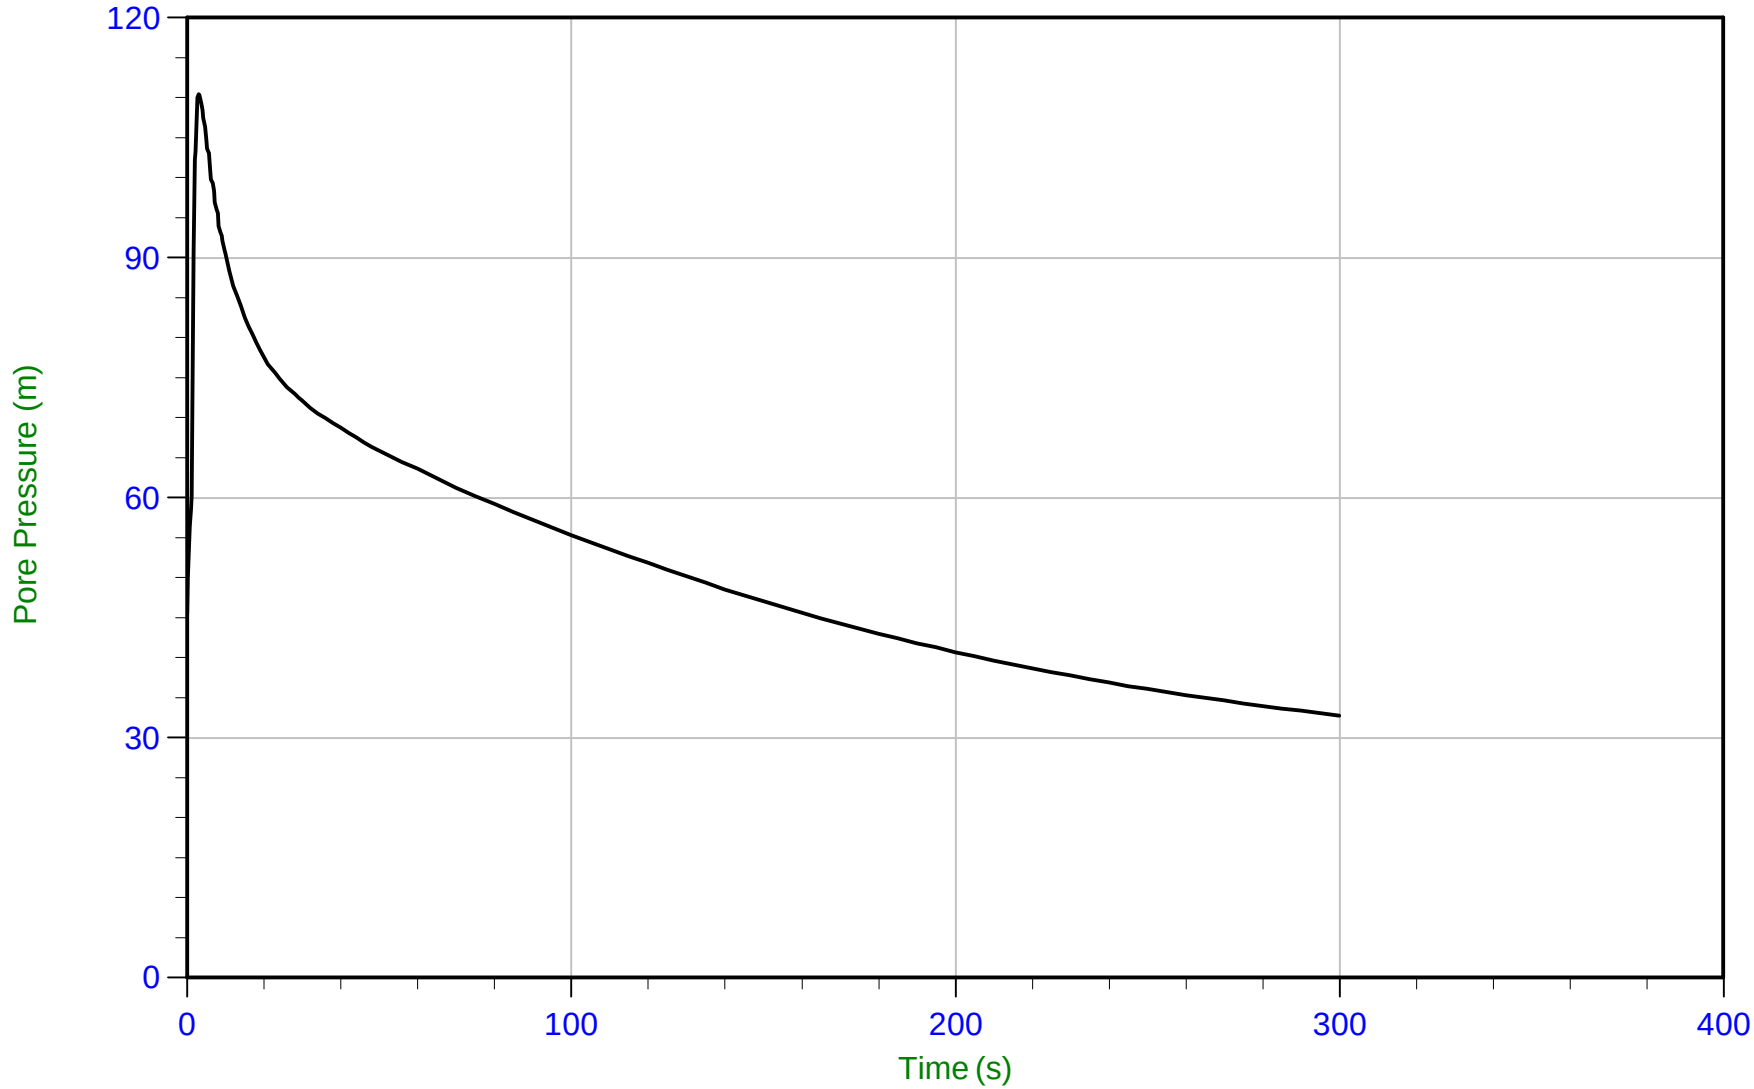

Trace Summary:

Filename: 22-02-23796_RP22-22CPT158.PPF
Depth: 4.725 m / 15.502 ft
Duration: 300.0 s


u Min: 32.8 m
u Max: 110.4 m
u Final: 32.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/14/2022 12:12
Site: Brooks, Alberta

Sounding: RCPT22-22CPT160
Cone: 822:T1000F10U35 Area=15 cm²

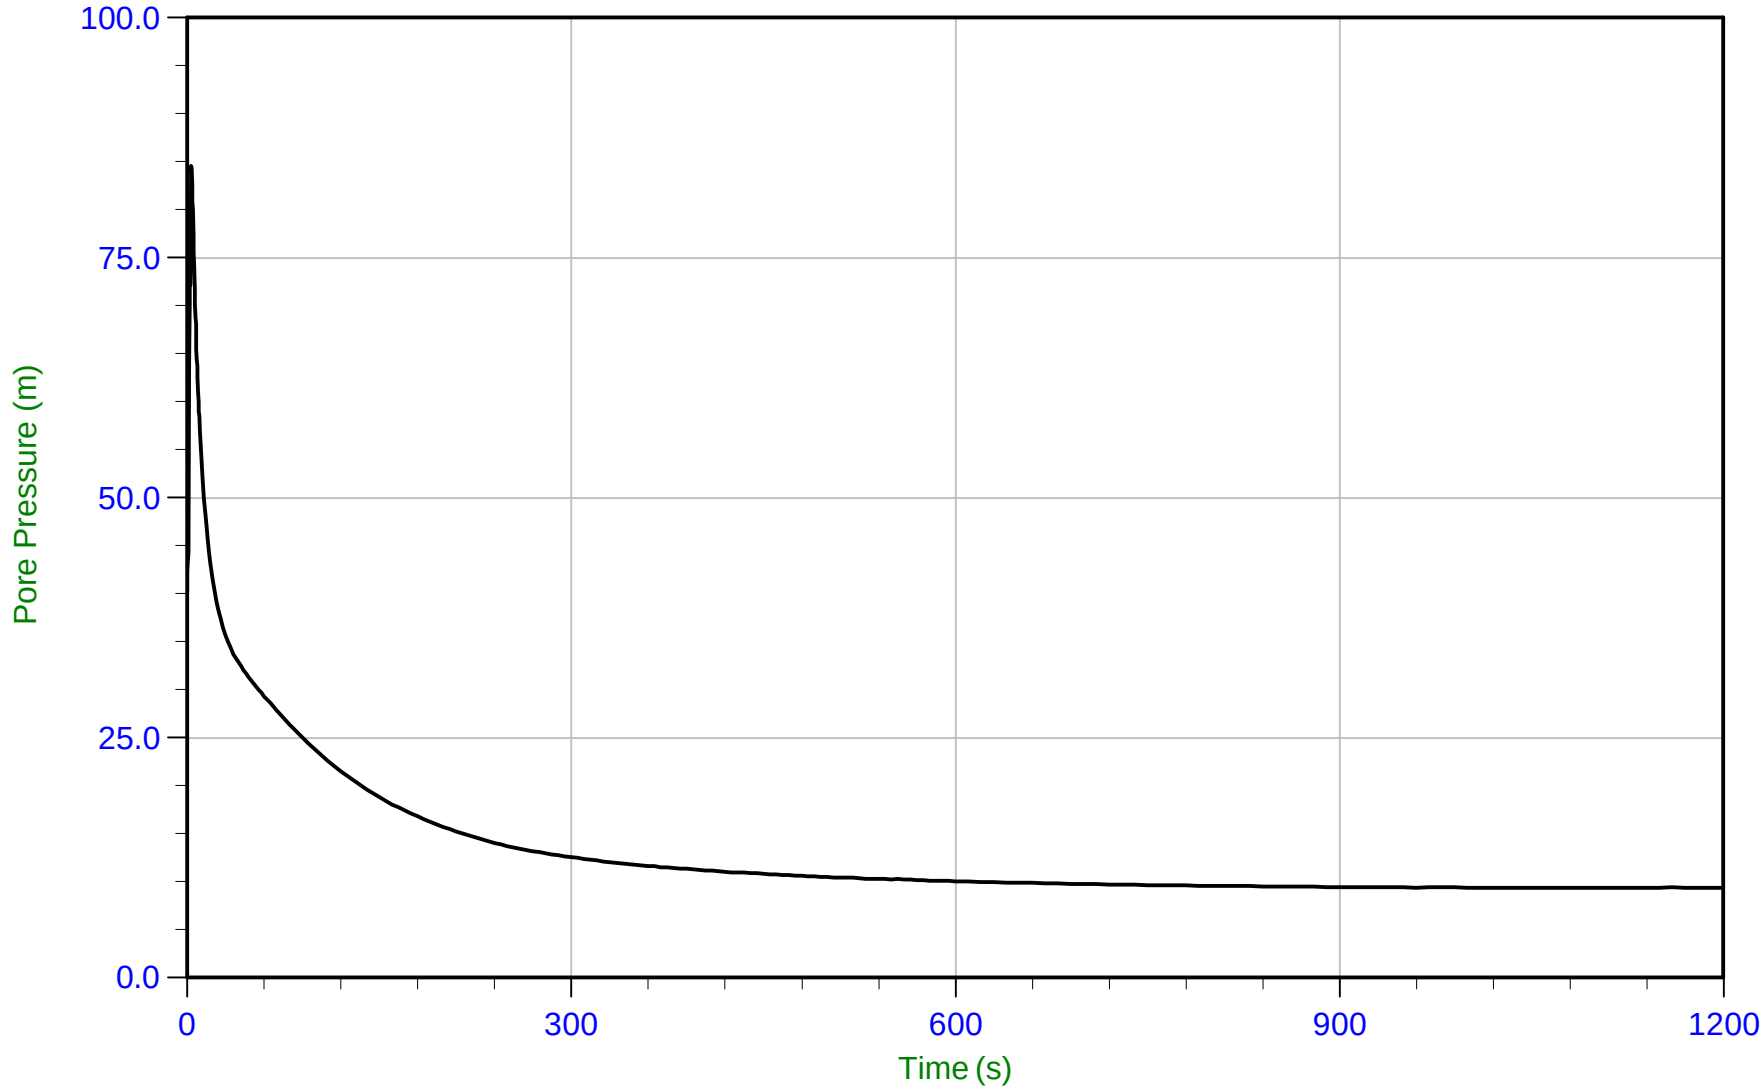

Trace Summary:

Filename: 22-02-23796_RP22-22CPT160.PPF
Depth: 6.750 m / 22.145 ft
Duration: 1200.0 s


u Min: 9.4 m
u Max: 84.5 m
u Final: 9.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 14:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT161B
Cone: 750:T1500F15U35 Area=15 cm²

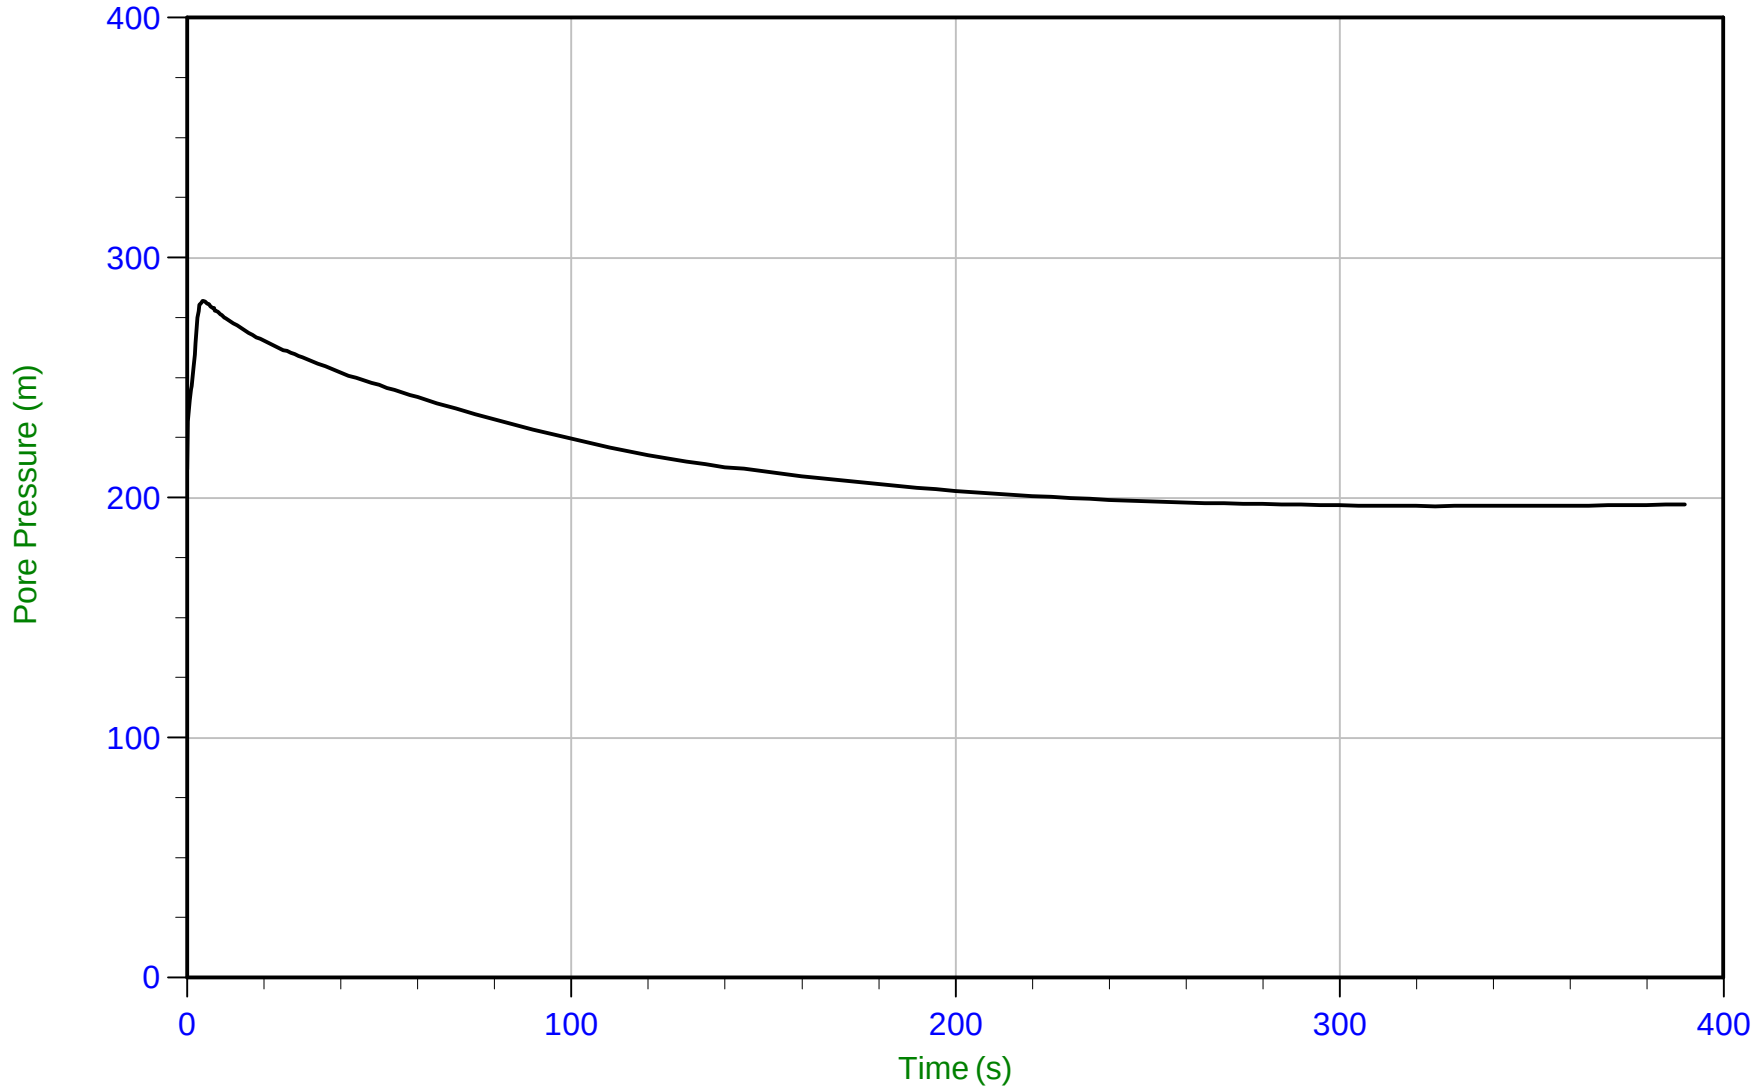

Trace Summary:

Filename: 22-02-23796_RP22-22CPT161B.PPF
Depth: 9.375 m / 30.758 ft
Duration: 390.0 s

u Min: 196.5 m
u Max: 282.1 m
u Final: 197.2 m


WT: 2.000 m / 6.562 ft
Ueq: 7.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 10:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT162
Cone: 750:T1500F15U35 Area=15 cm²

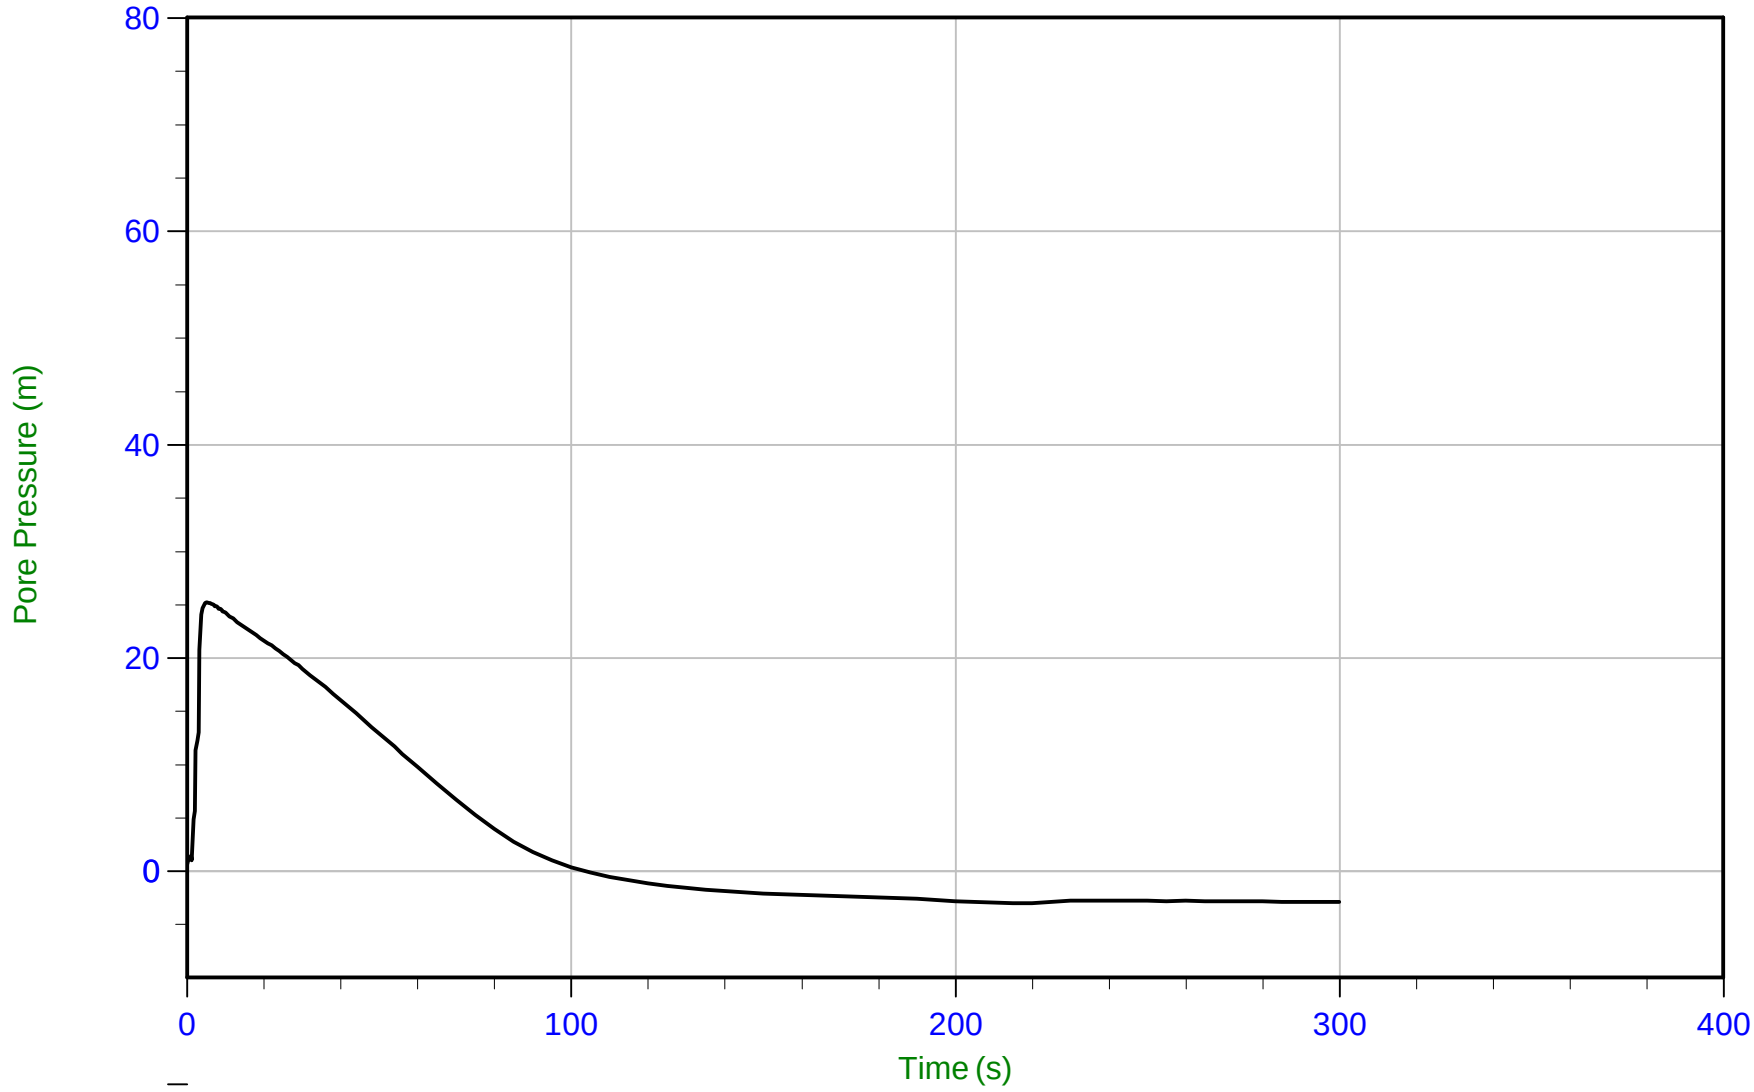

Trace Summary:

Filename: 22-02-23796_RP22-22CPT162.PPF
Depth: 6.875 m / 22.556 ft
Duration: 300.0 s


u Min: -3.0 m
u Max: 25.2 m
u Final: -2.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 10:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT162
Cone: 750:T1500F15U35 Area=15 cm²

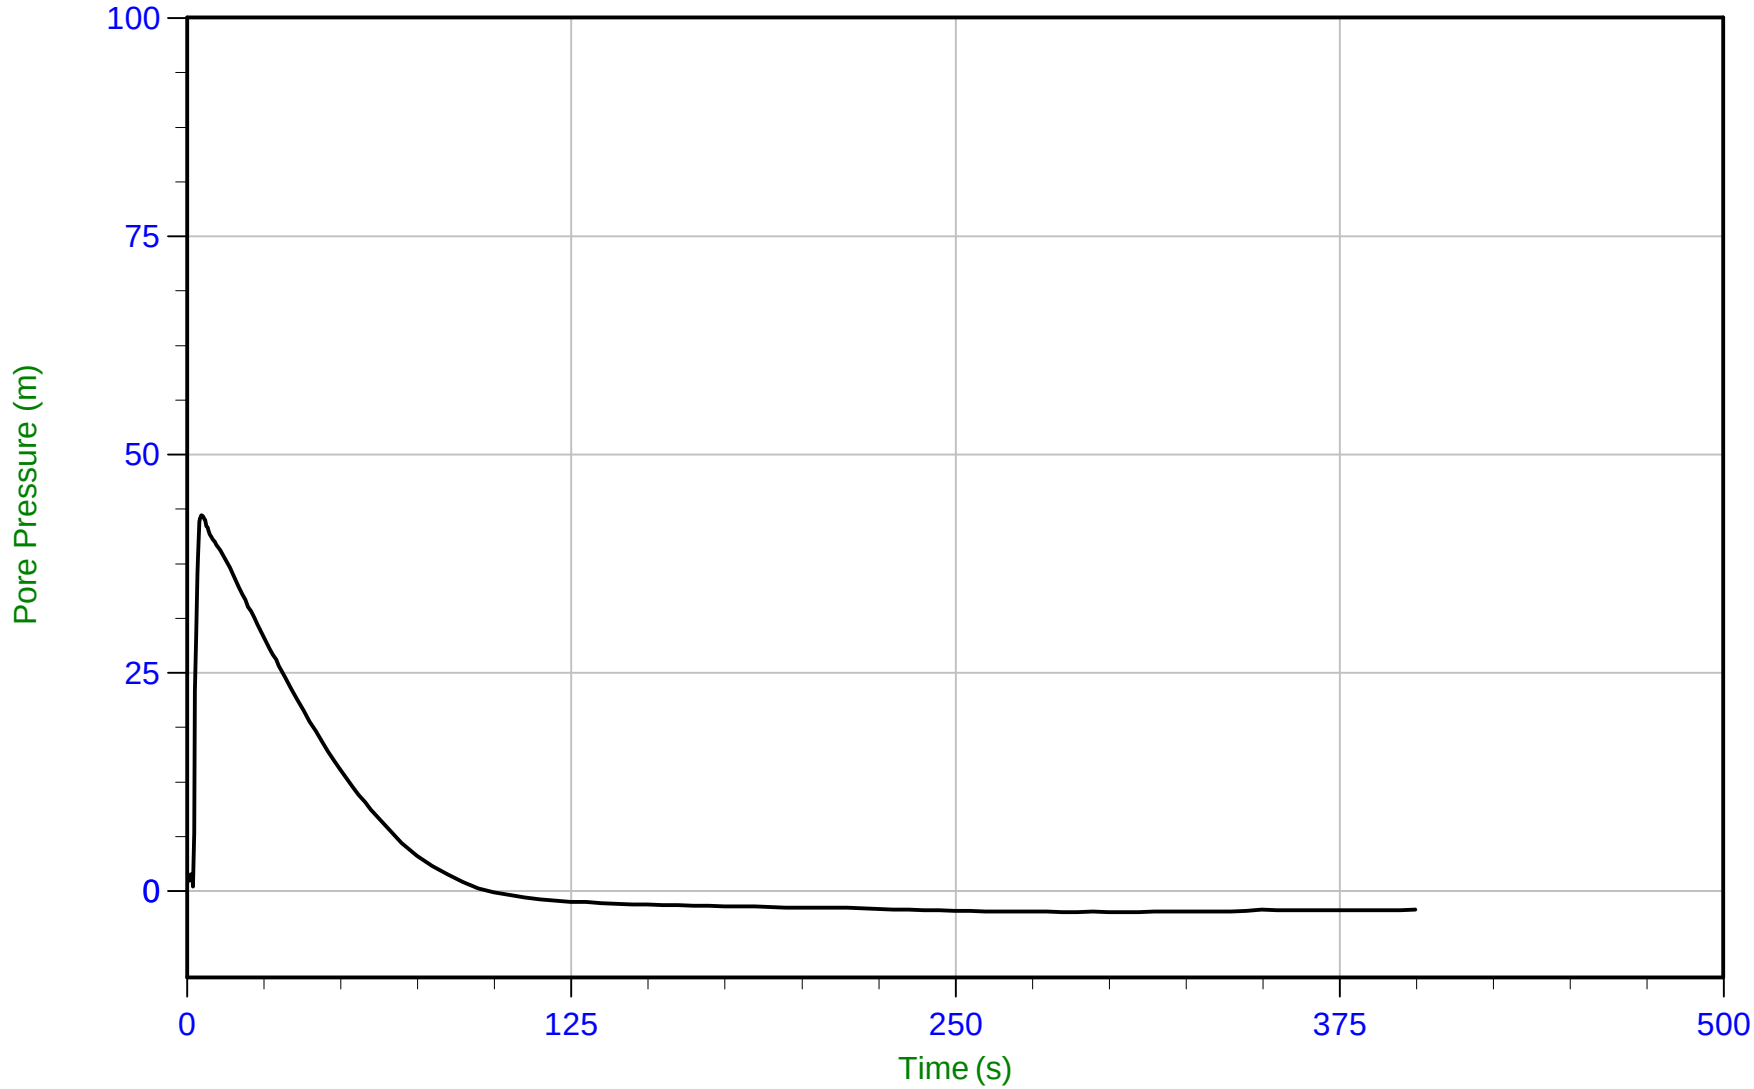

Trace Summary:

Filename: 22-02-23796_RP22-22CPT162.PPF
Depth: 10.350 m / 33.956 ft
Duration: 400.0 s


u Min: -2.5 m
u Max: 43.0 m
u Final: -2.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/14/2022 06:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT163
Cone: 821:T1000F10U35 Area=15 cm²

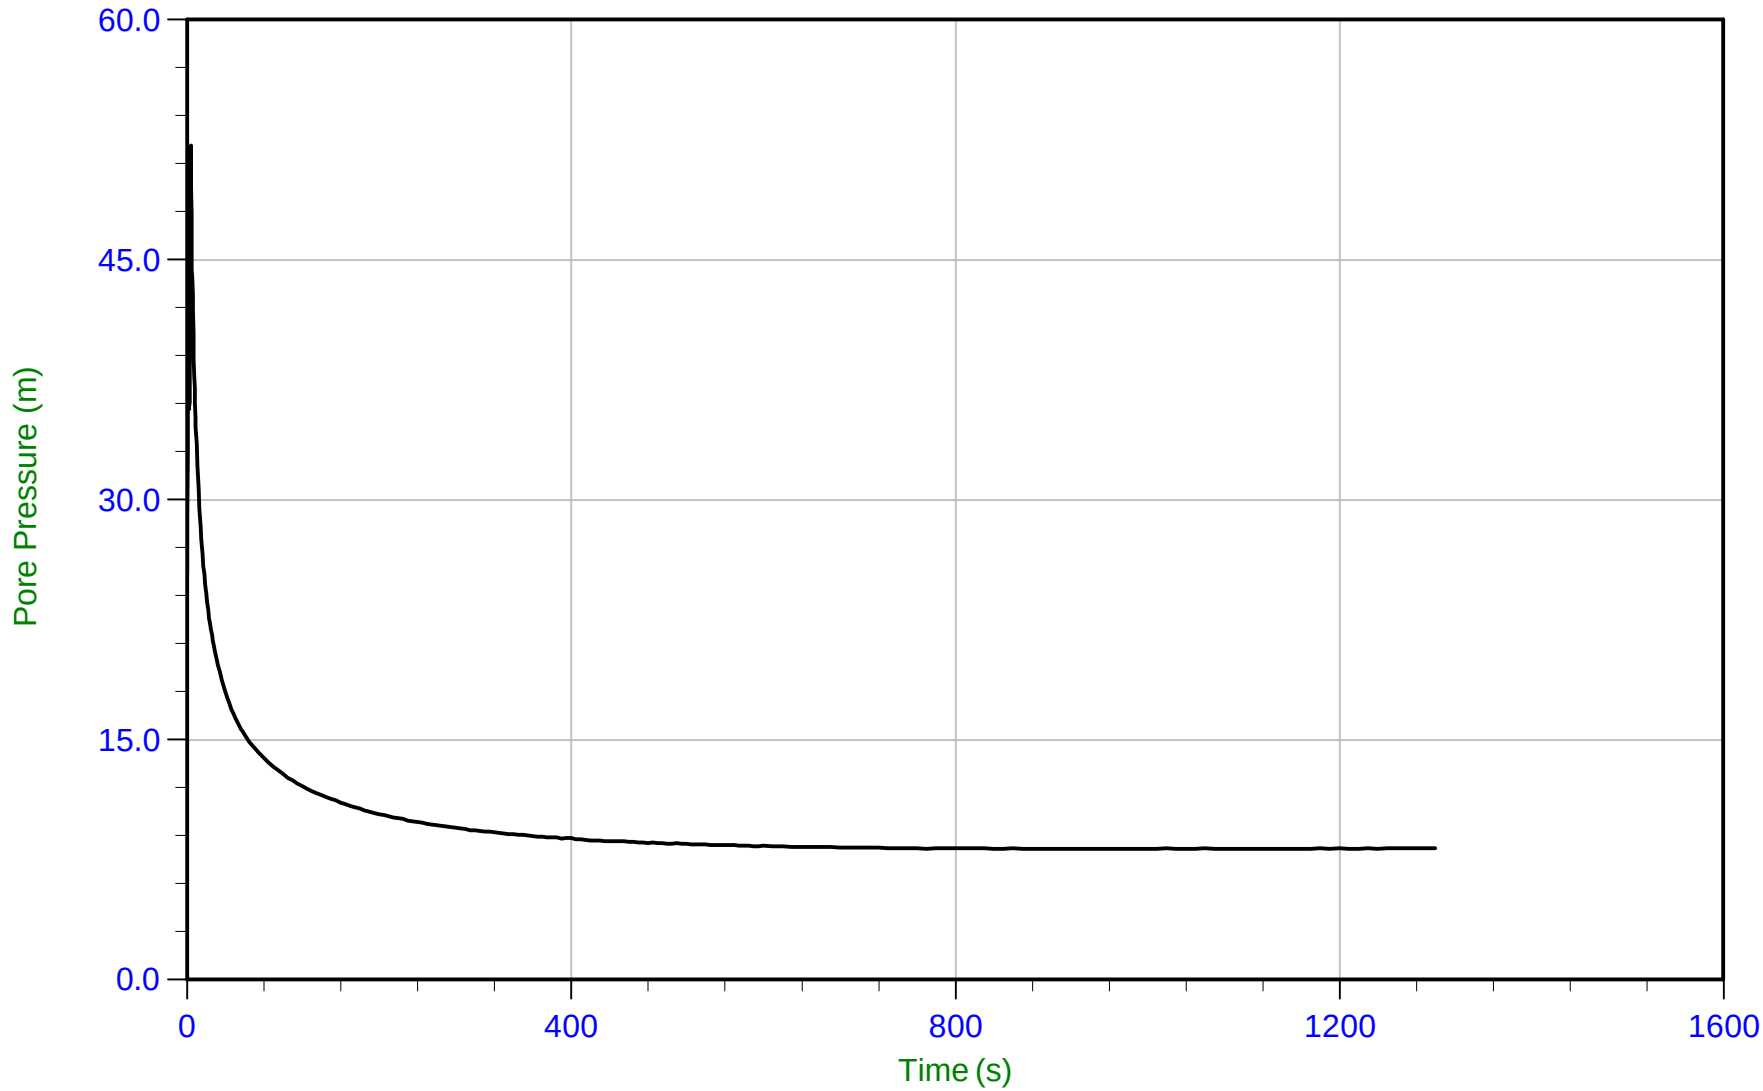

Trace Summary:

Filename: 22-02-23796_RP22-22CPT163.PPF
Depth: 5.750 m / 18.865 ft
Duration: 1300.0 s


u Min: 8.2 m
u Max: 52.1 m
u Final: 8.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/23/2022 15:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT164
Cone: 750:T1500F15U35 Area=15 cm²

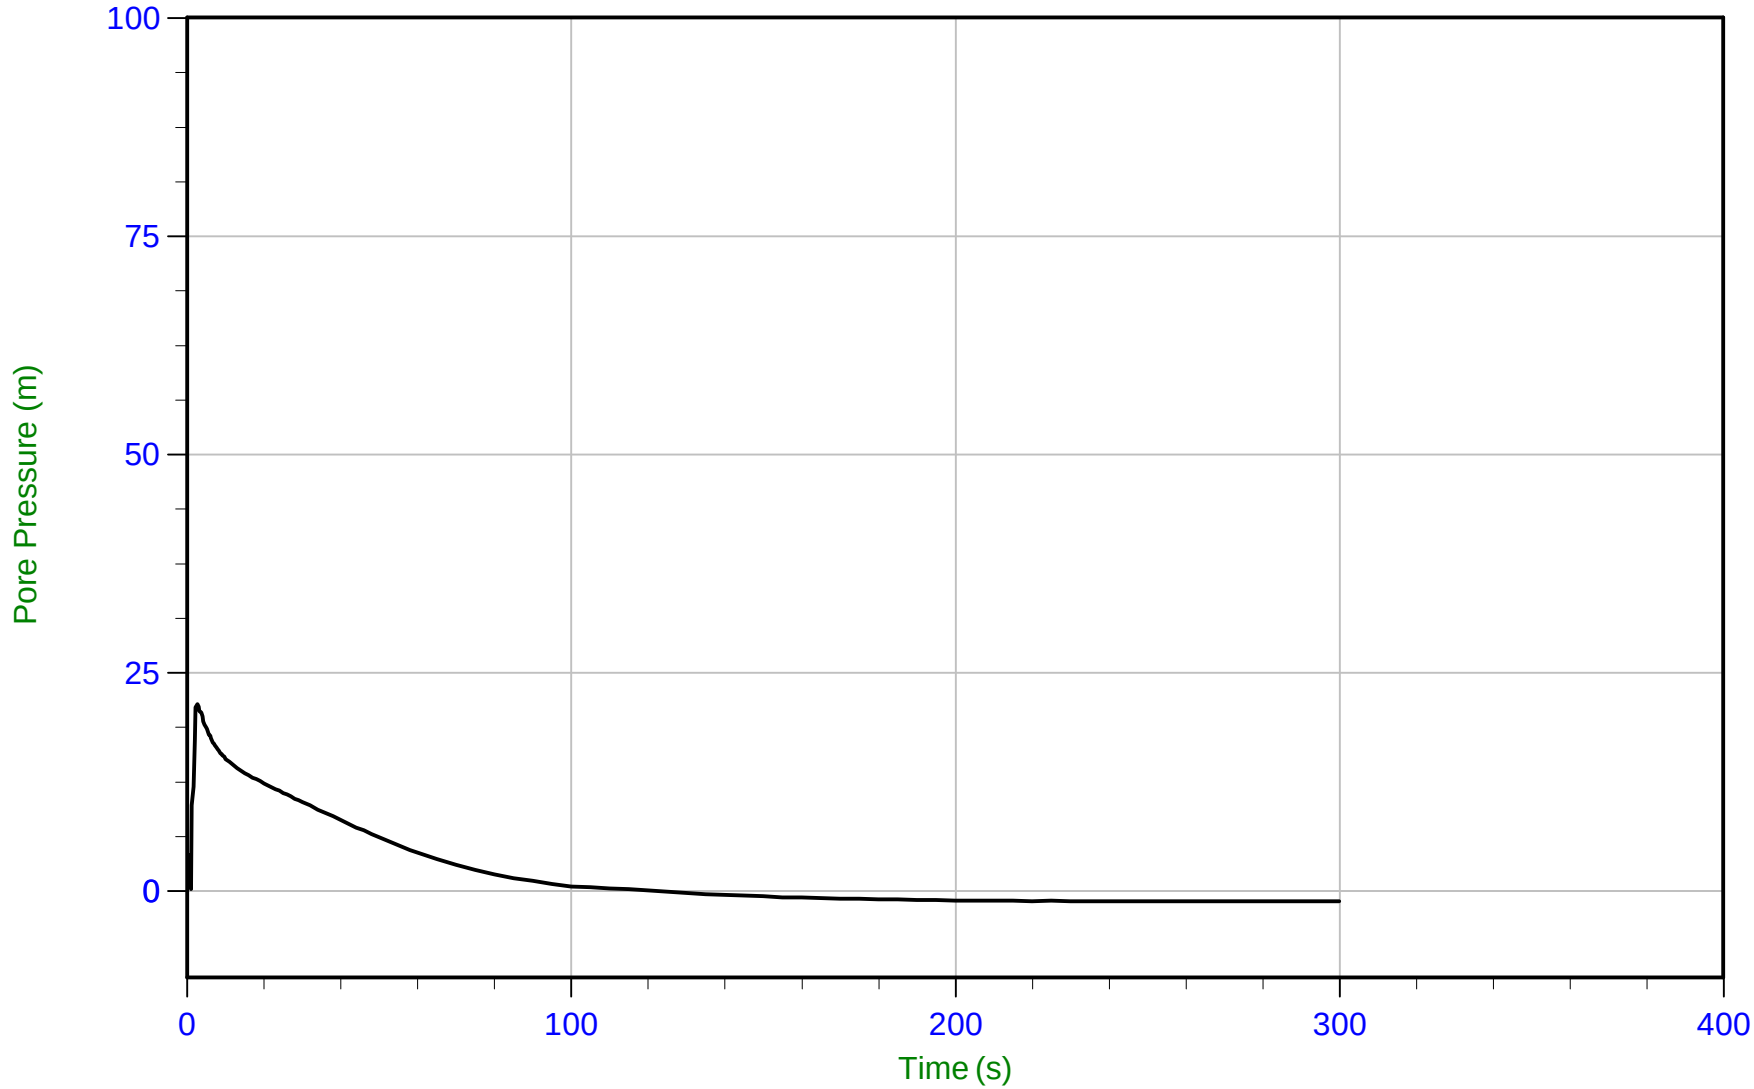

Trace Summary:

Filename: 22-02-23796_RP22-22CPT164.PPF
Depth: 6.875 m / 22.556 ft
Duration: 300.0 s


u Min: -1.3 m
u Max: 21.4 m
u Final: -1.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 15:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT165
Cone: 821:T1000F10U35 Area=15 cm²

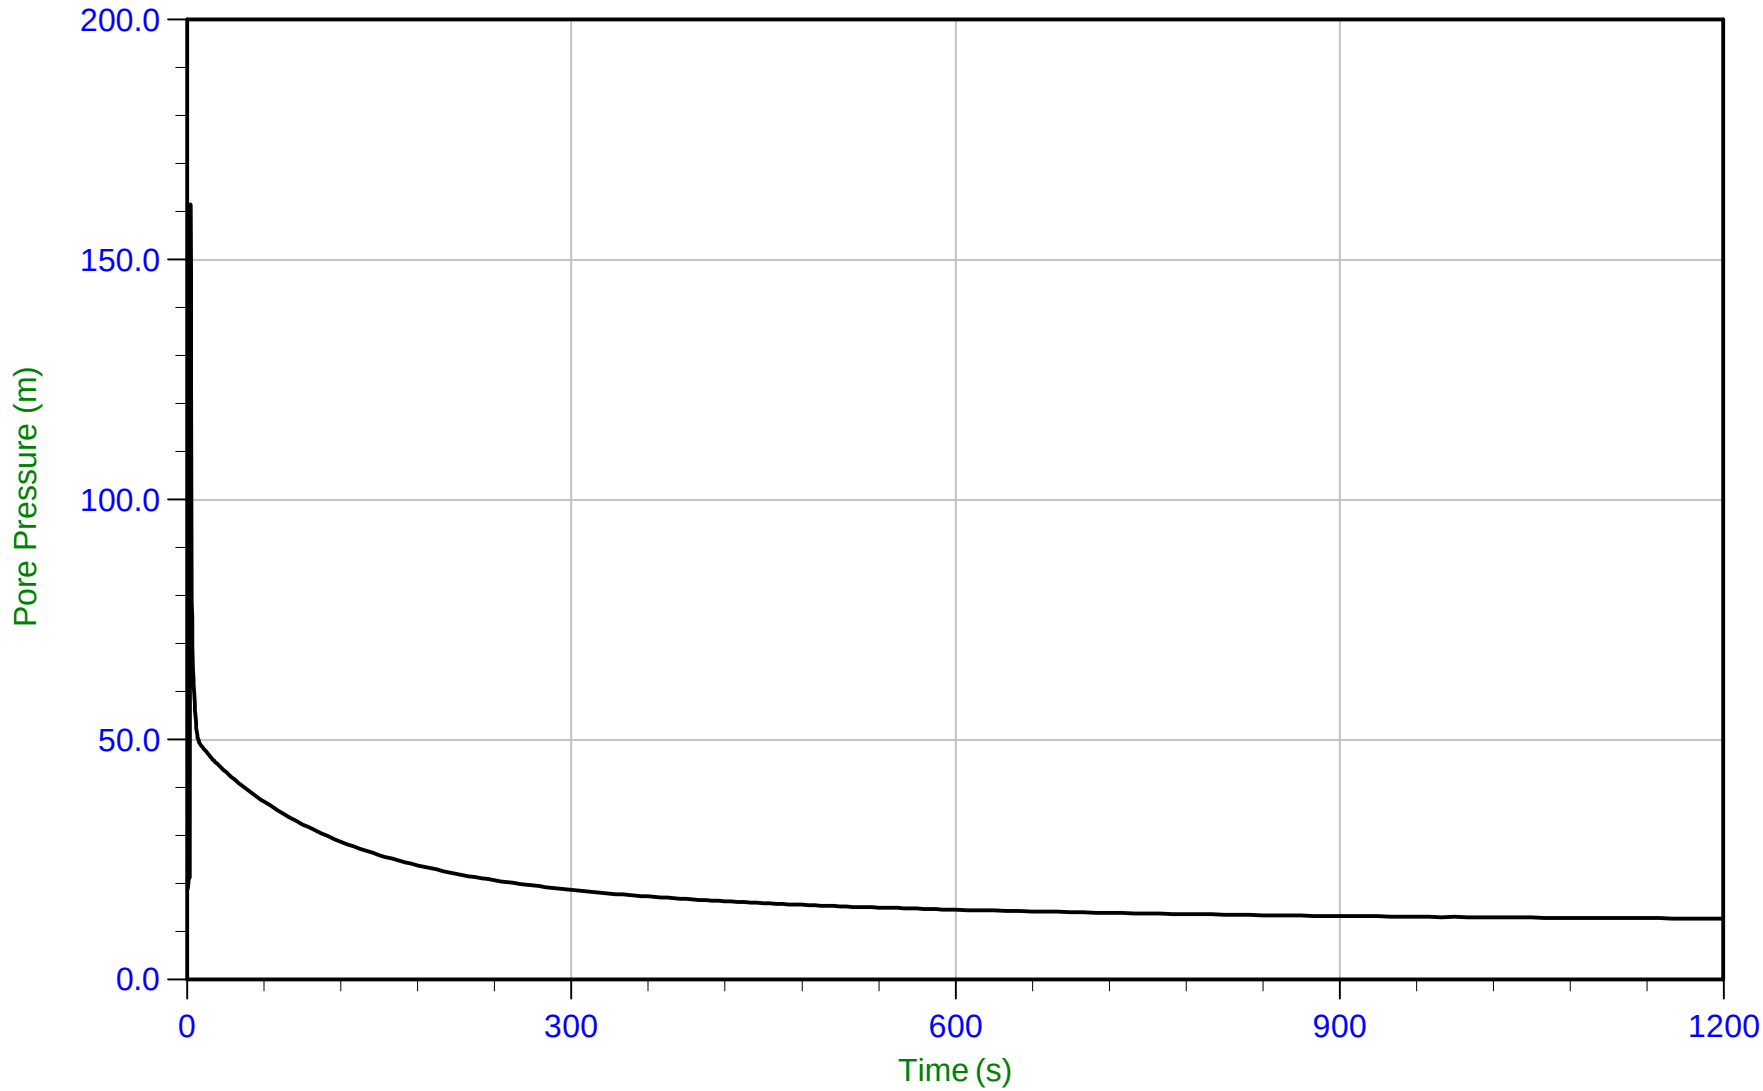

Trace Summary:

Filename: 22-02-23796_RP22-22CPT165.PPF
Depth: 3.800 m / 12.467 ft
Duration: 1200.0 s


u Min: 12.7 m
u Max: 161.5 m
u Final: 12.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT166
Cone: 750:T1500F15U35 Area=15 cm²

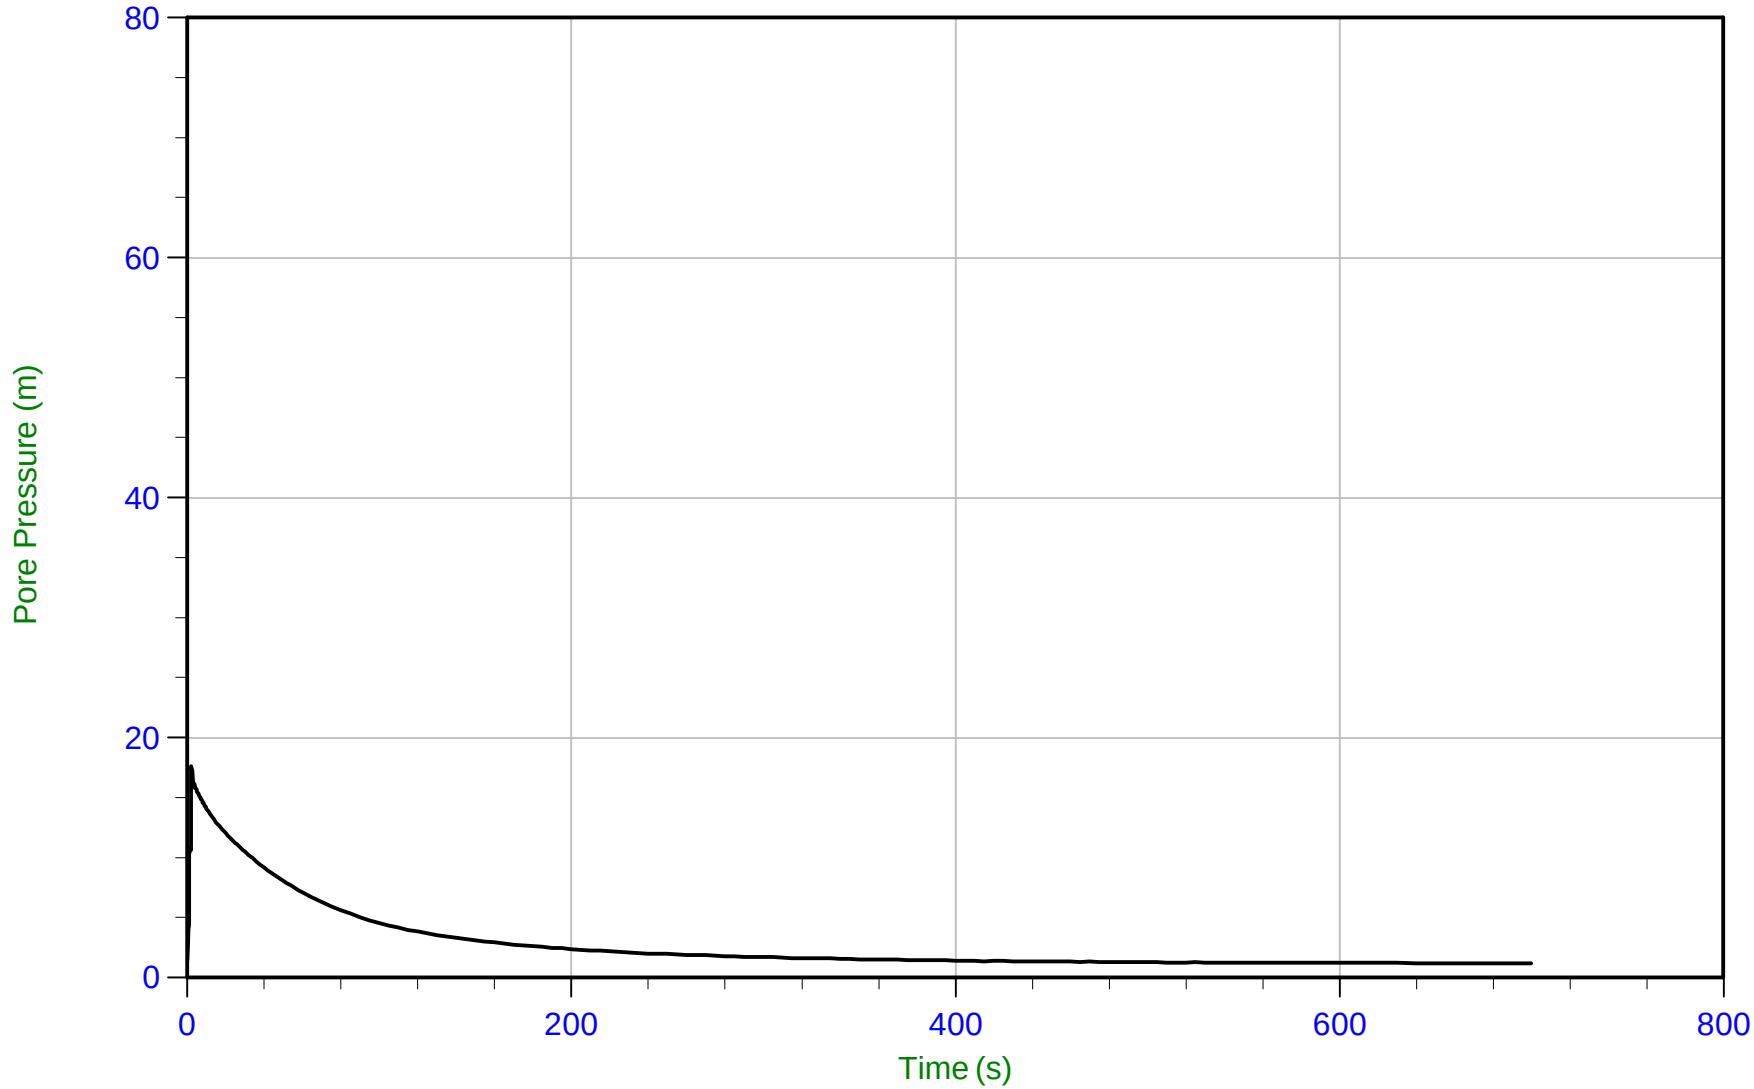

Trace Summary:

Filename: 22-02-23796_RP22-22CPT166.PPF
Depth: 5.775 m / 18.947 ft
Duration: 700.0 s

u Min: 1.2 m
u Max: 17.6 m
u Final: 1.2 m


WT: 4.580 m / 15.026 ft
Ueq: 1.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 09:07
Site: Brooks, Alberta

Sounding: RCPT22-22CPT166
Cone: 750:T1500F15U35 Area=15 cm²

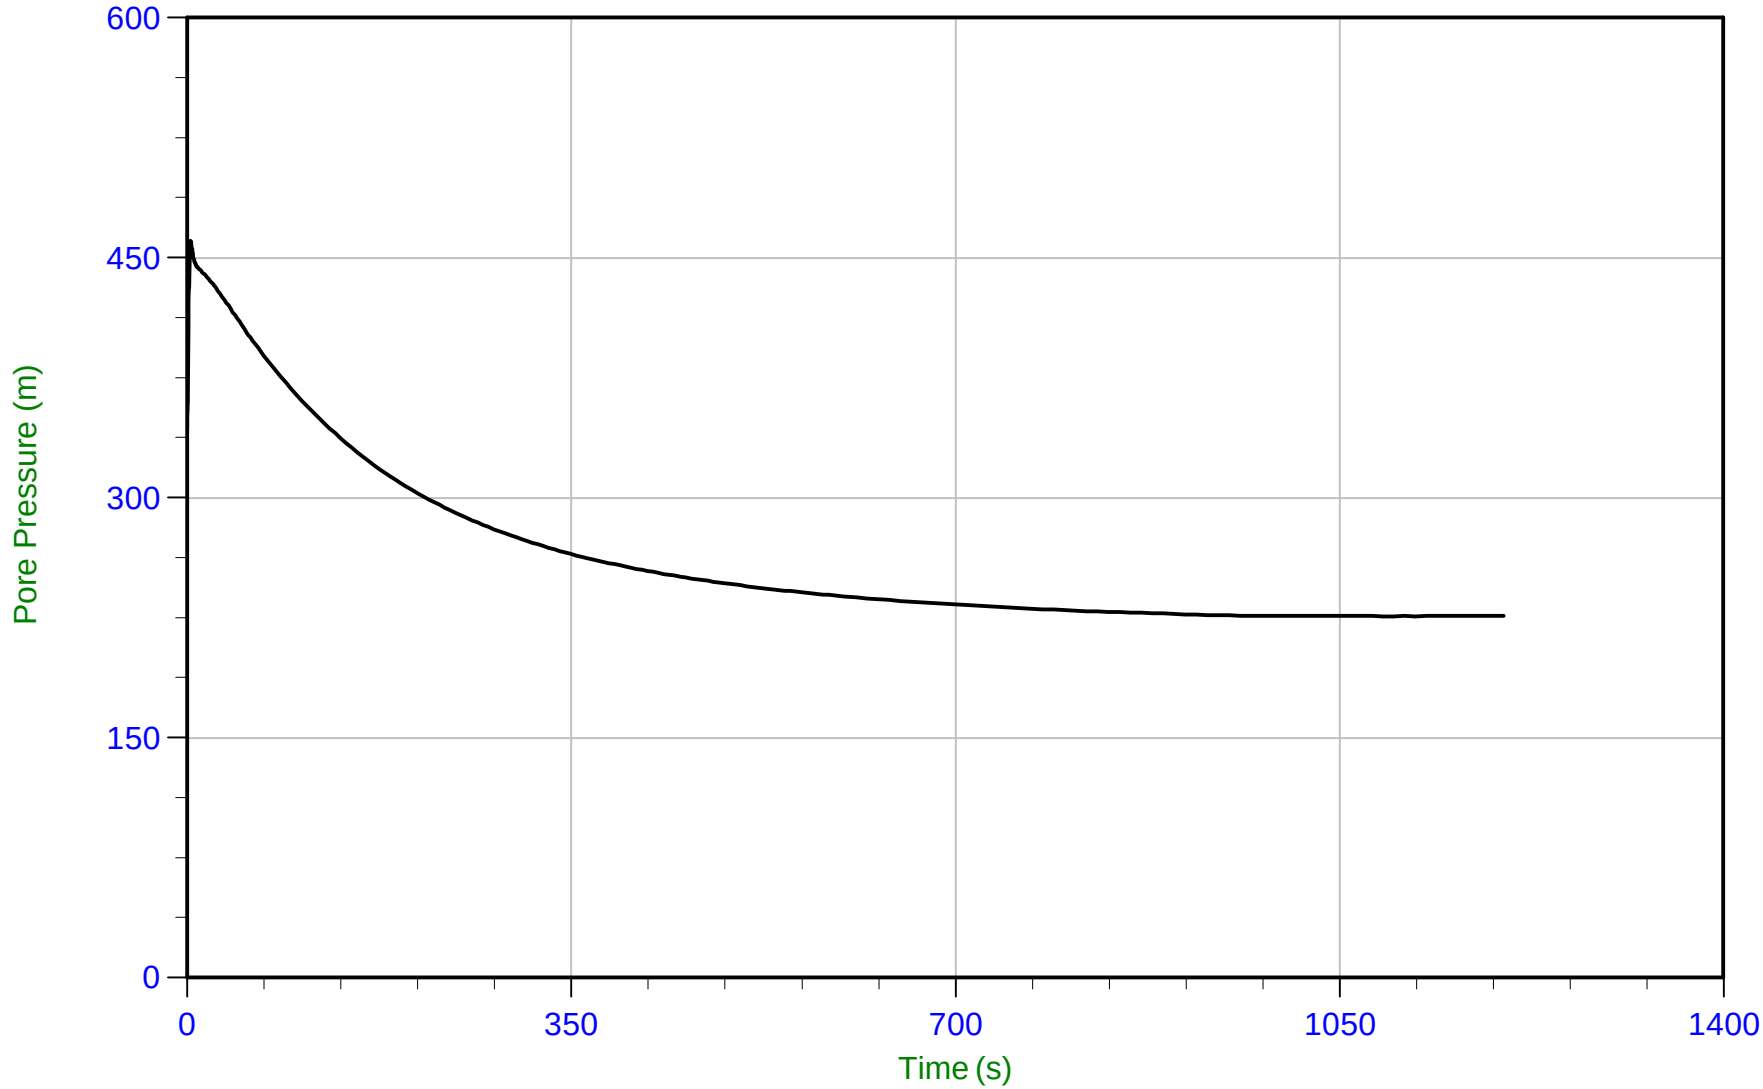

Trace Summary:

Filename: 22-02-23796_RP22-22CPT166.PPF
Depth: 10.250 m / 33.628 ft
Duration: 1200.0 s


u Min: 226.0 m
u Max: 460.7 m
u Final: 226.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 13:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT167
Cone: 854:T1500F15U35 Area=15 cm²

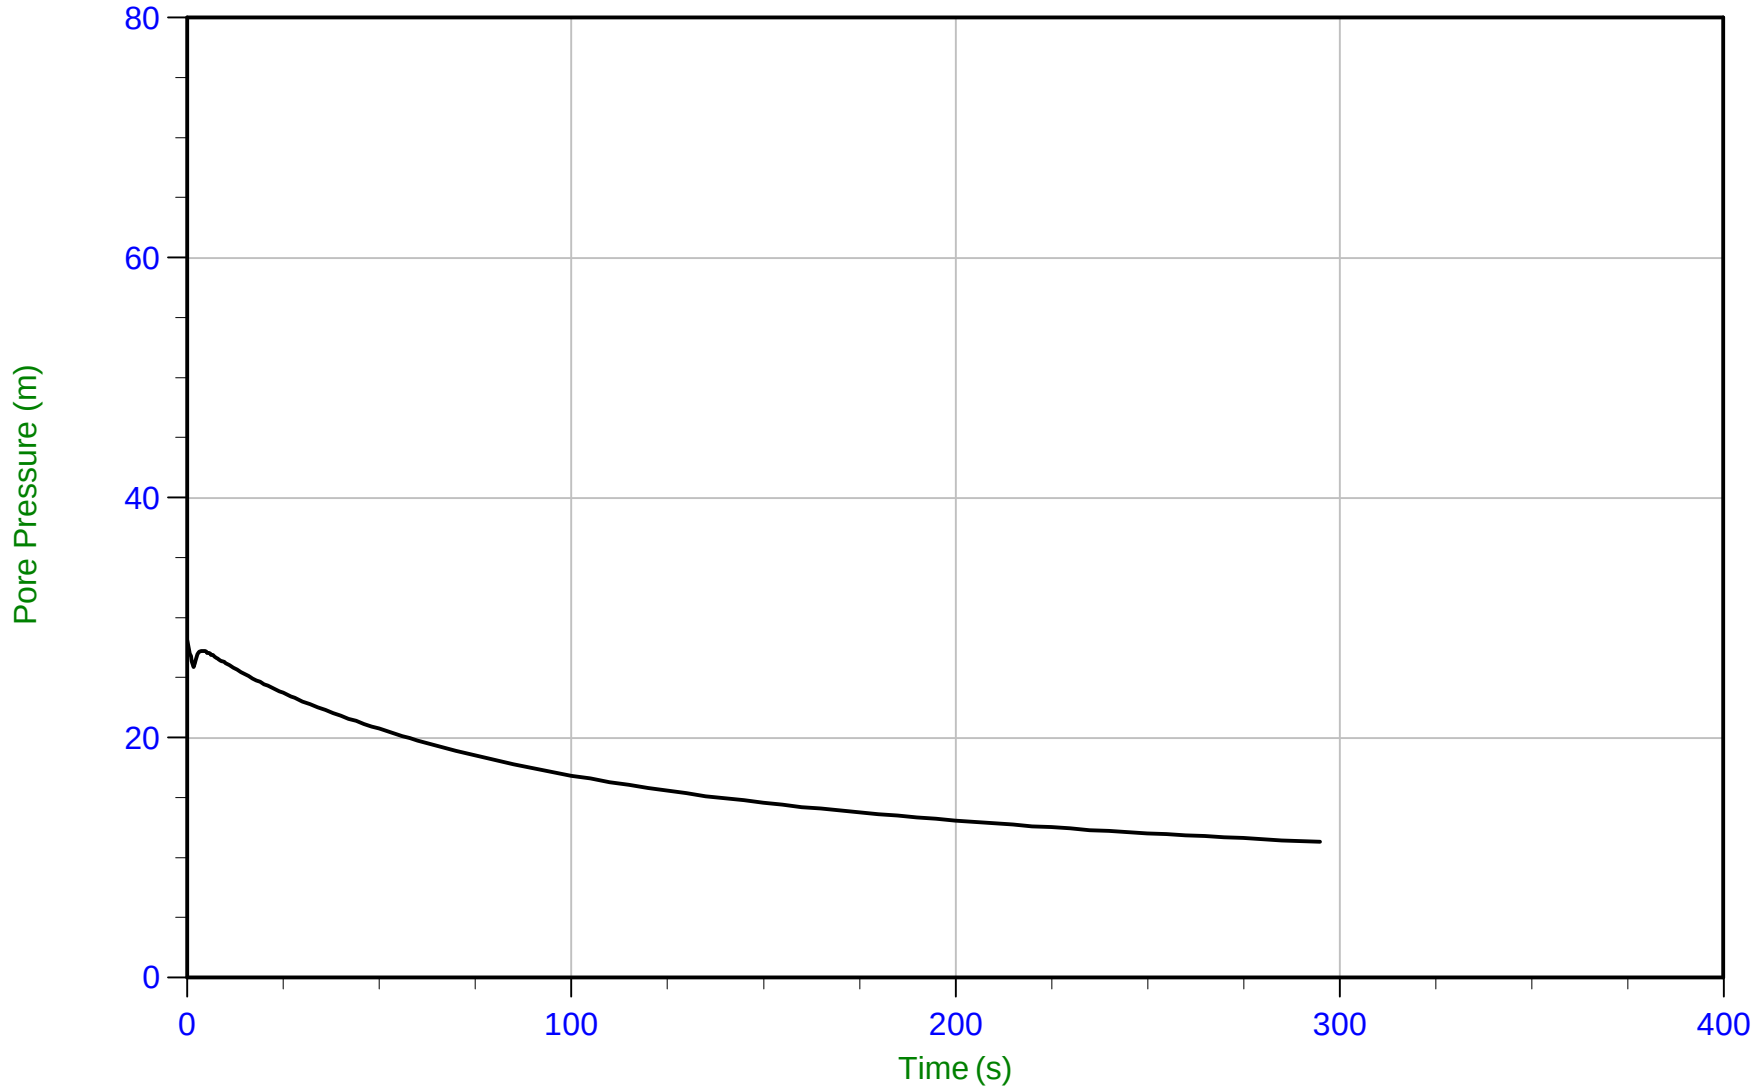

Trace Summary:

Filename: 22-02-23796_RP22-22CPT167.PPF
Depth: 7.825 m / 25.672 ft
Duration: 295.0 s


u Min: 11.3 m
u Max: 28.2 m
u Final: 11.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 13:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT167
Cone: 854:T1500F15U35 Area=15 cm²

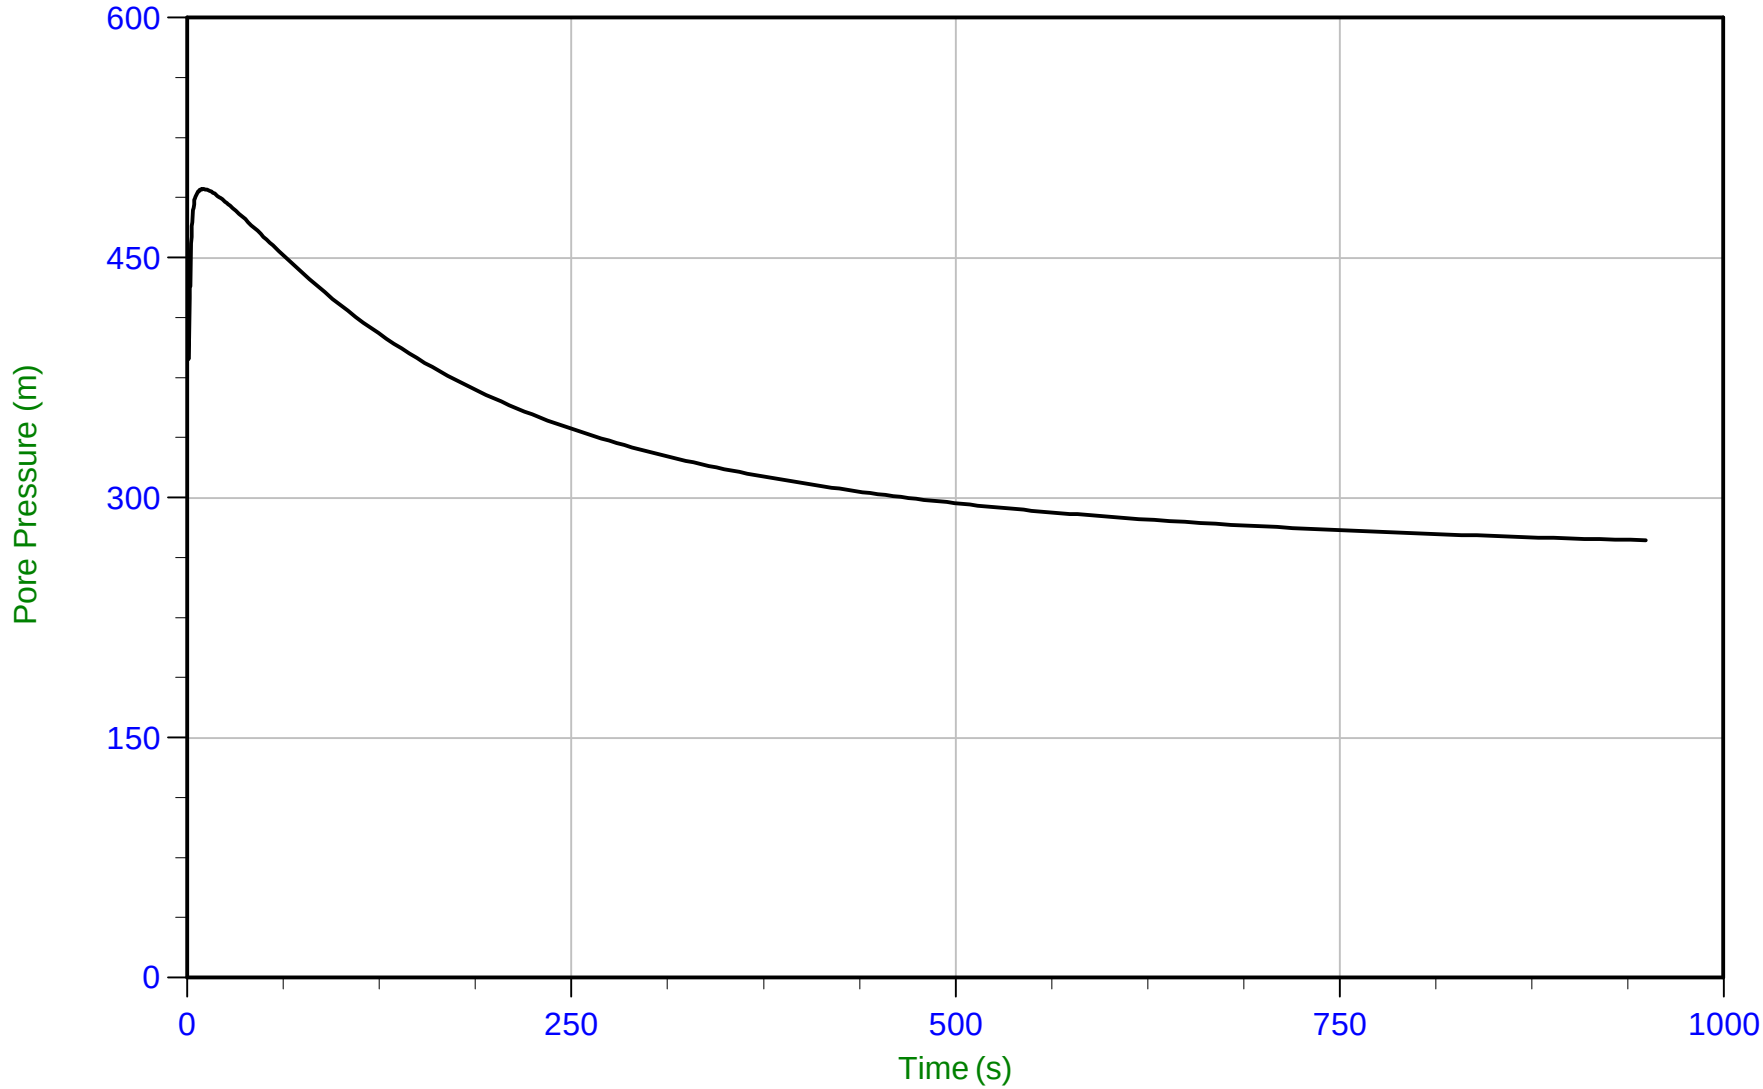

Trace Summary:

Filename: 22-02-23796_RP22-22CPT167.PPF
Depth: 9.575 m / 31.414 ft
Duration: 950.0 s


u Min: 273.4 m
u Max: 492.8 m
u Final: 273.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 15:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT168
Cone: 854:T1500F15U35 Area=15 cm²

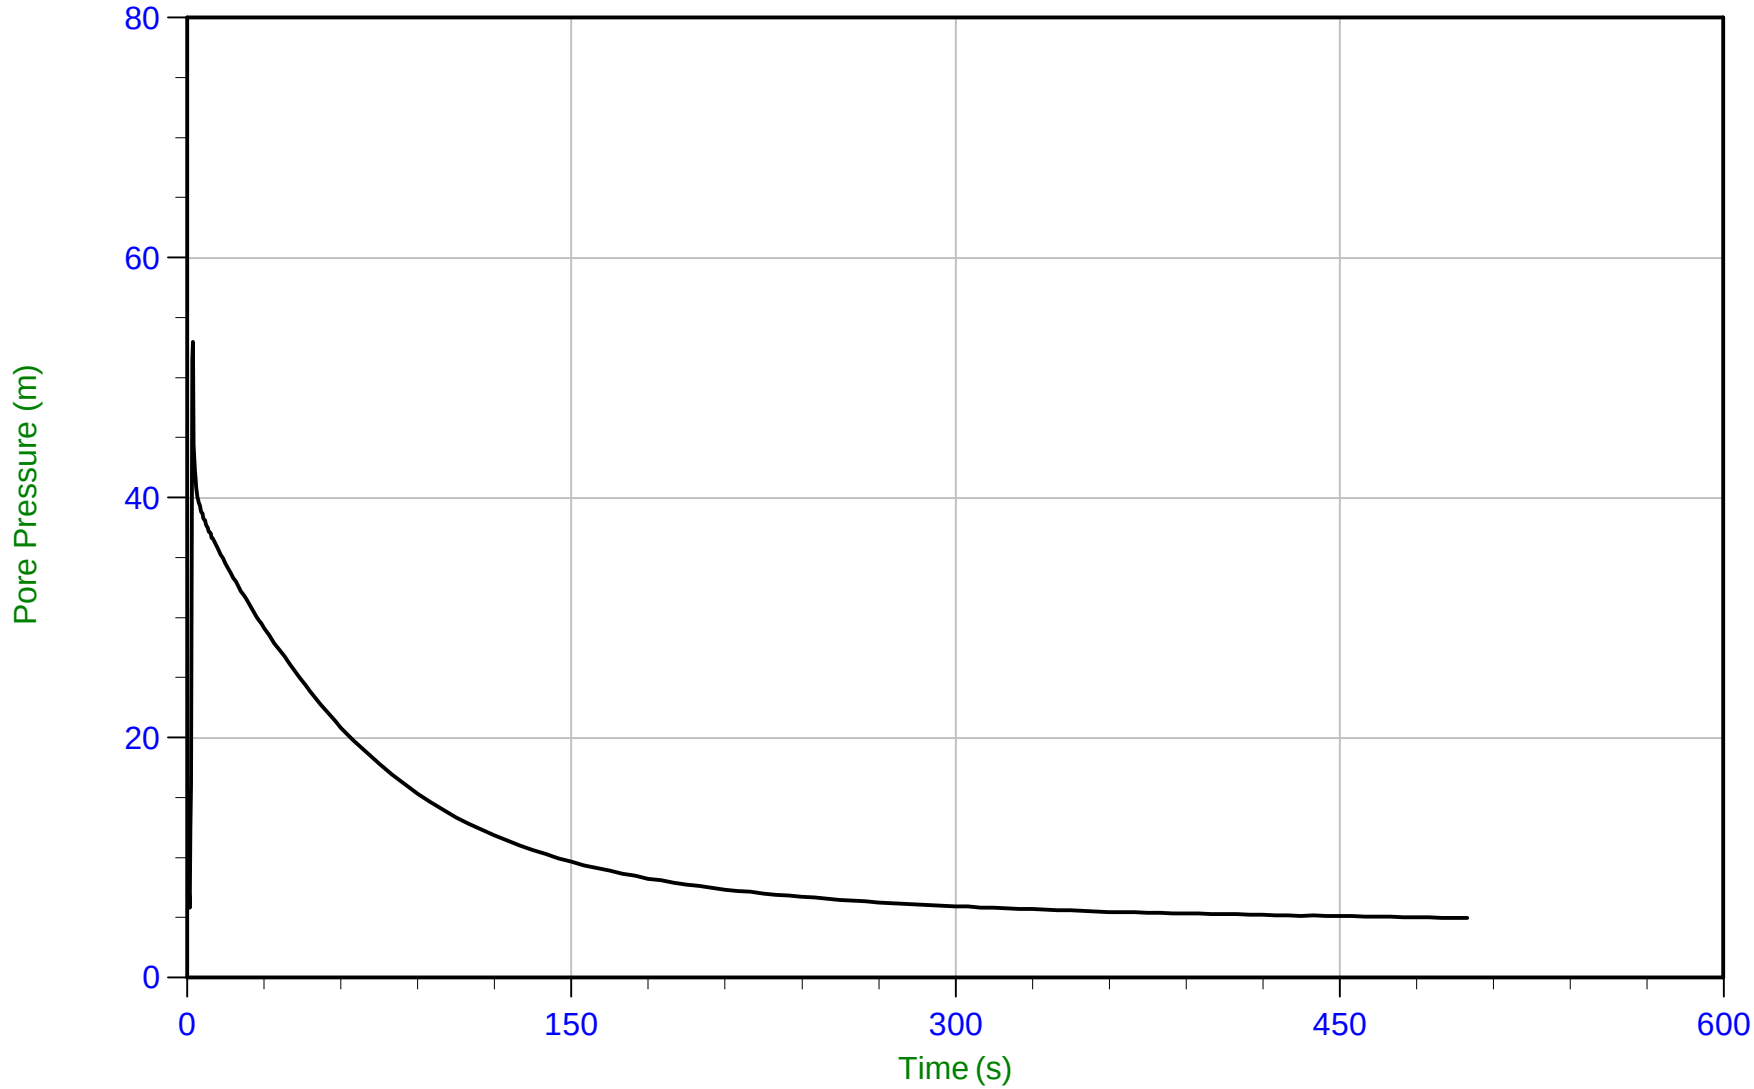

Trace Summary:

Filename: 22-02-23796_RP22-22CPT168.PPF
Depth: 5.875 m / 19.275 ft
Duration: 500.0 s

u Min: 5.0 m
u Max: 53.0 m
u Final: 5.0 m


WT: 2.400 m / 7.874 ft
Ueq: 3.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 15:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT168
Cone: 854:T1500F15U35 Area=15 cm²

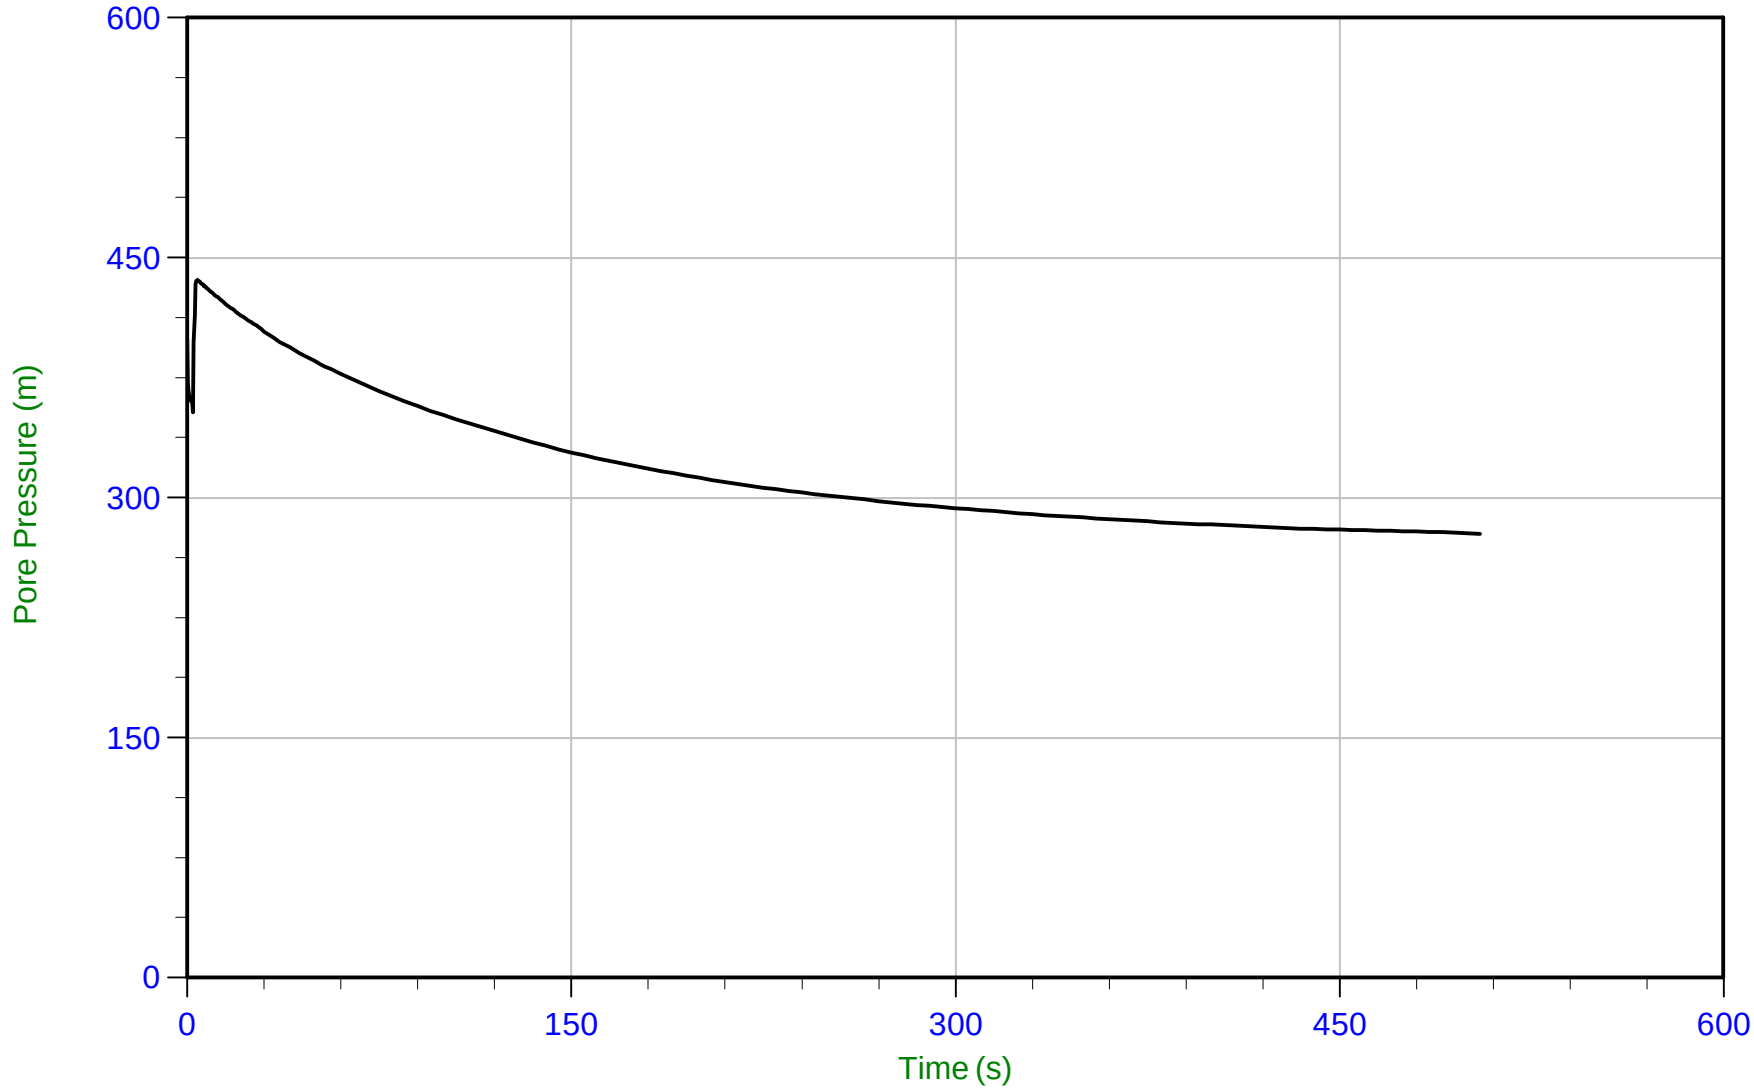

Trace Summary:

Filename: 22-02-23796_RP22-22CPT168.PPF
Depth: 8.375 m / 27.477 ft
Duration: 505.0 s


u Min: 277.4 m
u Max: 436.2 m
u Final: 277.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/24/2022 15:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT168
Cone: 854:T1500F15U35 Area=15 cm²

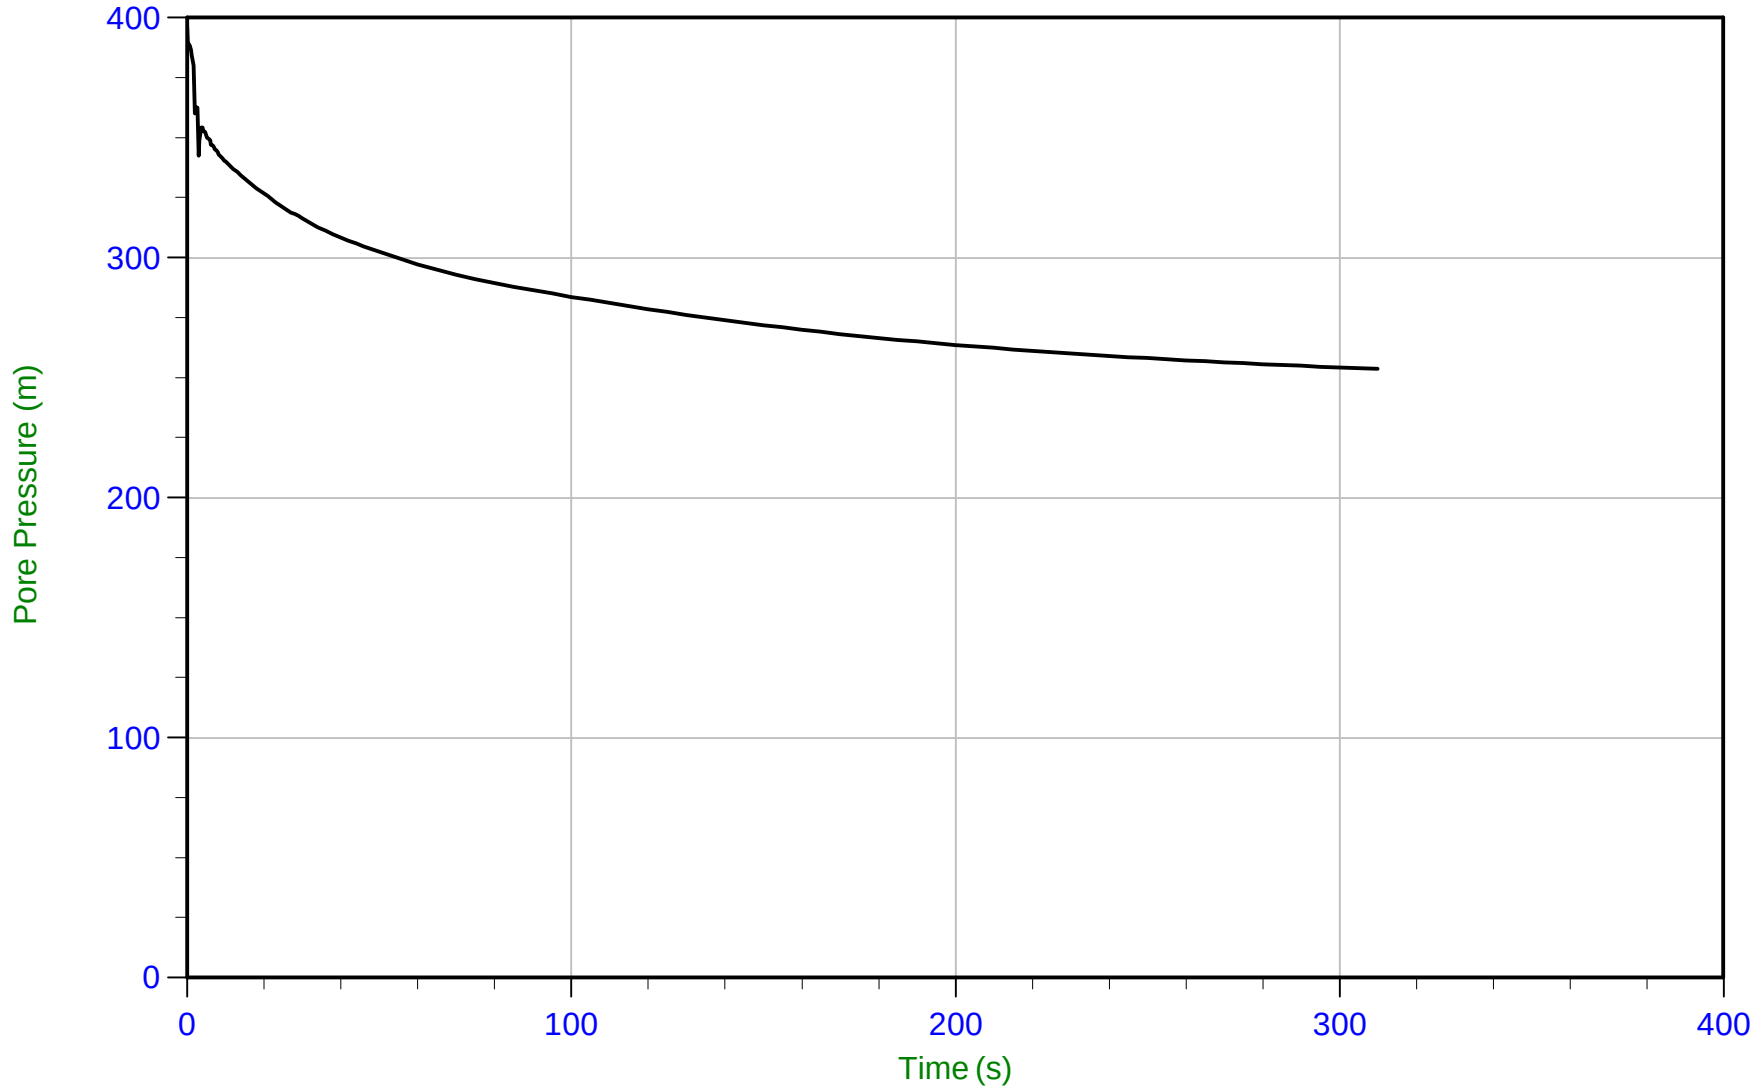

Trace Summary:

Filename: 22-02-23796_RP22-22CPT168.PPF
Depth: 9.225 m / 30.265 ft
Duration: 310.0 s


u Min: 253.8 m
u Max: 396.3 m
u Final: 253.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 08:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT169
Cone: 854:T1500F15U35 Area=15 cm²

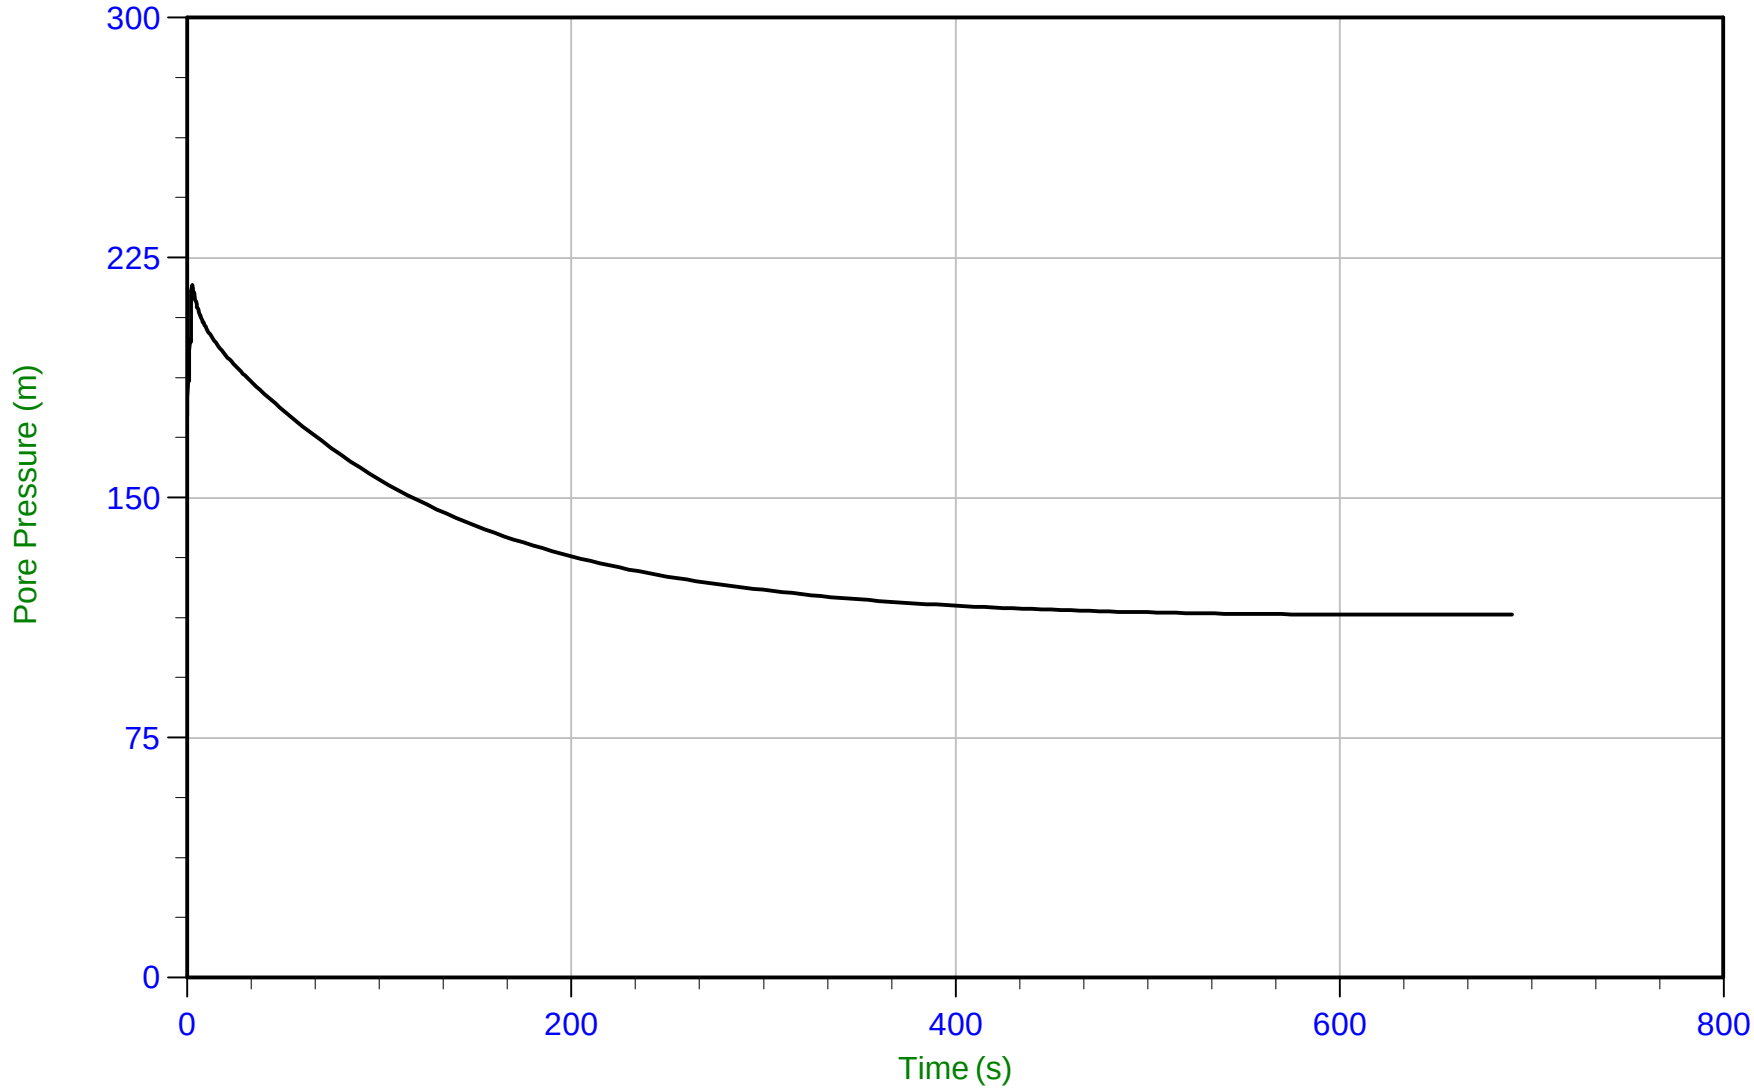

Trace Summary:

Filename: 22-02-23796_RP22-22CPT169.PPF
Depth: 6.175 m / 20.259 ft
Duration: 690.0 s


u Min: 113.4 m
u Max: 216.6 m
u Final: 113.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 08:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT169
Cone: 854:T1500F15U35 Area=15 cm²

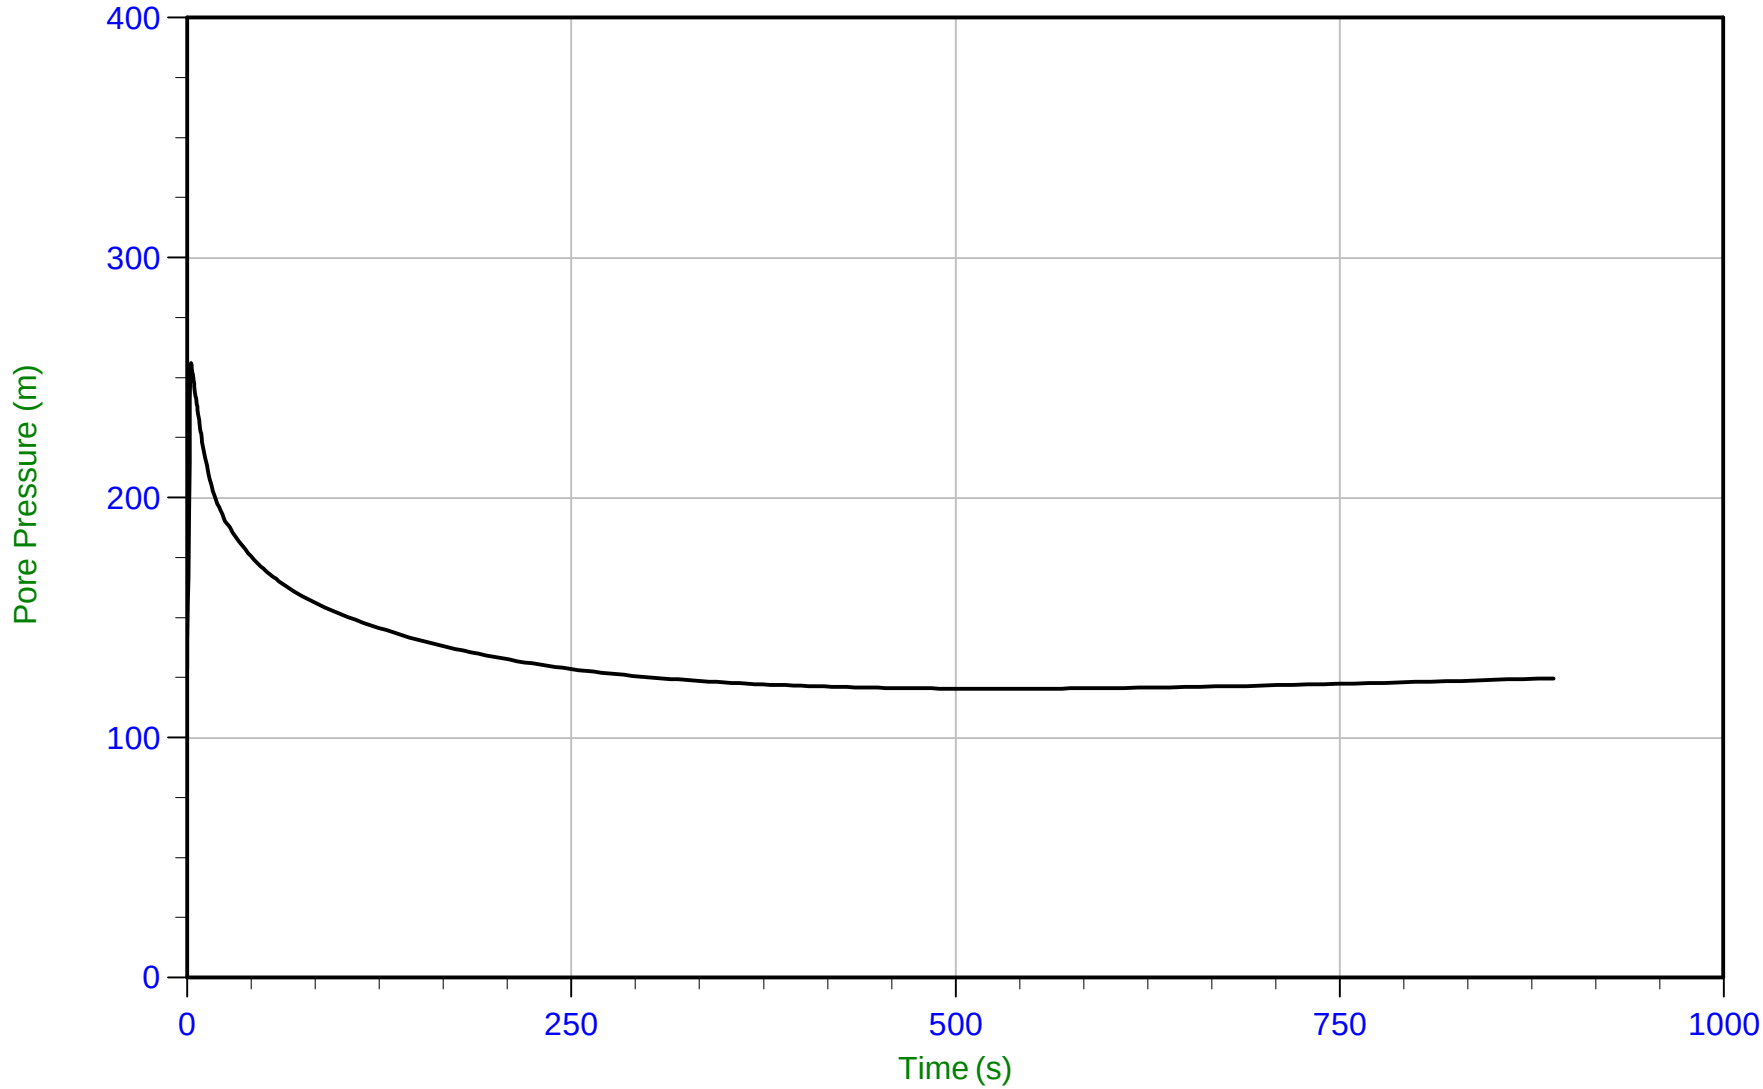

Trace Summary:

Filename: 22-02-23796_RP22-22CPT169.PPF
Depth: 7.850 m / 25.754 ft
Duration: 890.0 s


u Min: 120.4 m
u Max: 256.1 m
u Final: 124.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 11:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT170
Cone: 854:T1500F15U35 Area=15 cm²

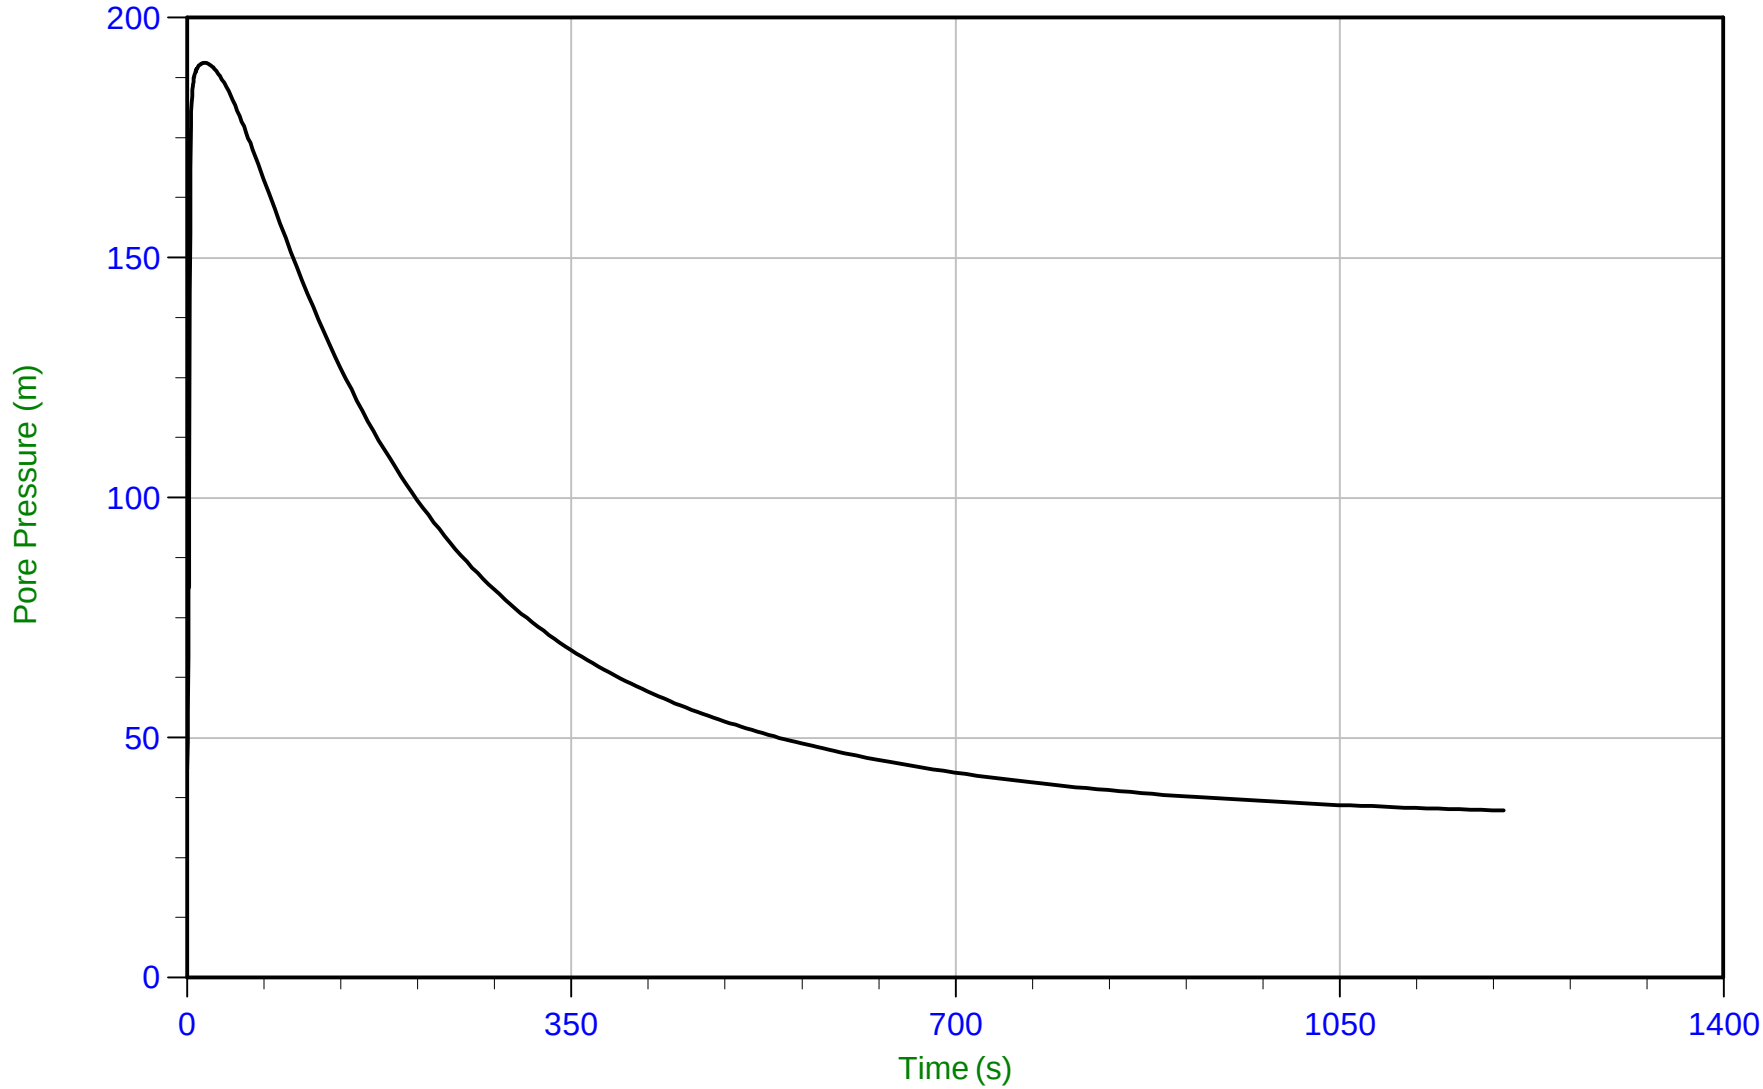

Trace Summary:

Filename: 22-02-23796_RP22-22CPT170.PPF
Depth: 8.450 m / 27.723 ft
Duration: 1200.0 s

u Min: 34.8 m
u Max: 190.6 m
u Final: 34.8 m

WT: 1.100 m / 3.609 ft
Ueq: 7.3 m
U(50): 98.98 m


T(50): 196.7 s
Ir: 100
Ch: 3.6 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 11:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT170
Cone: 854:T1500F15U35 Area=15 cm²

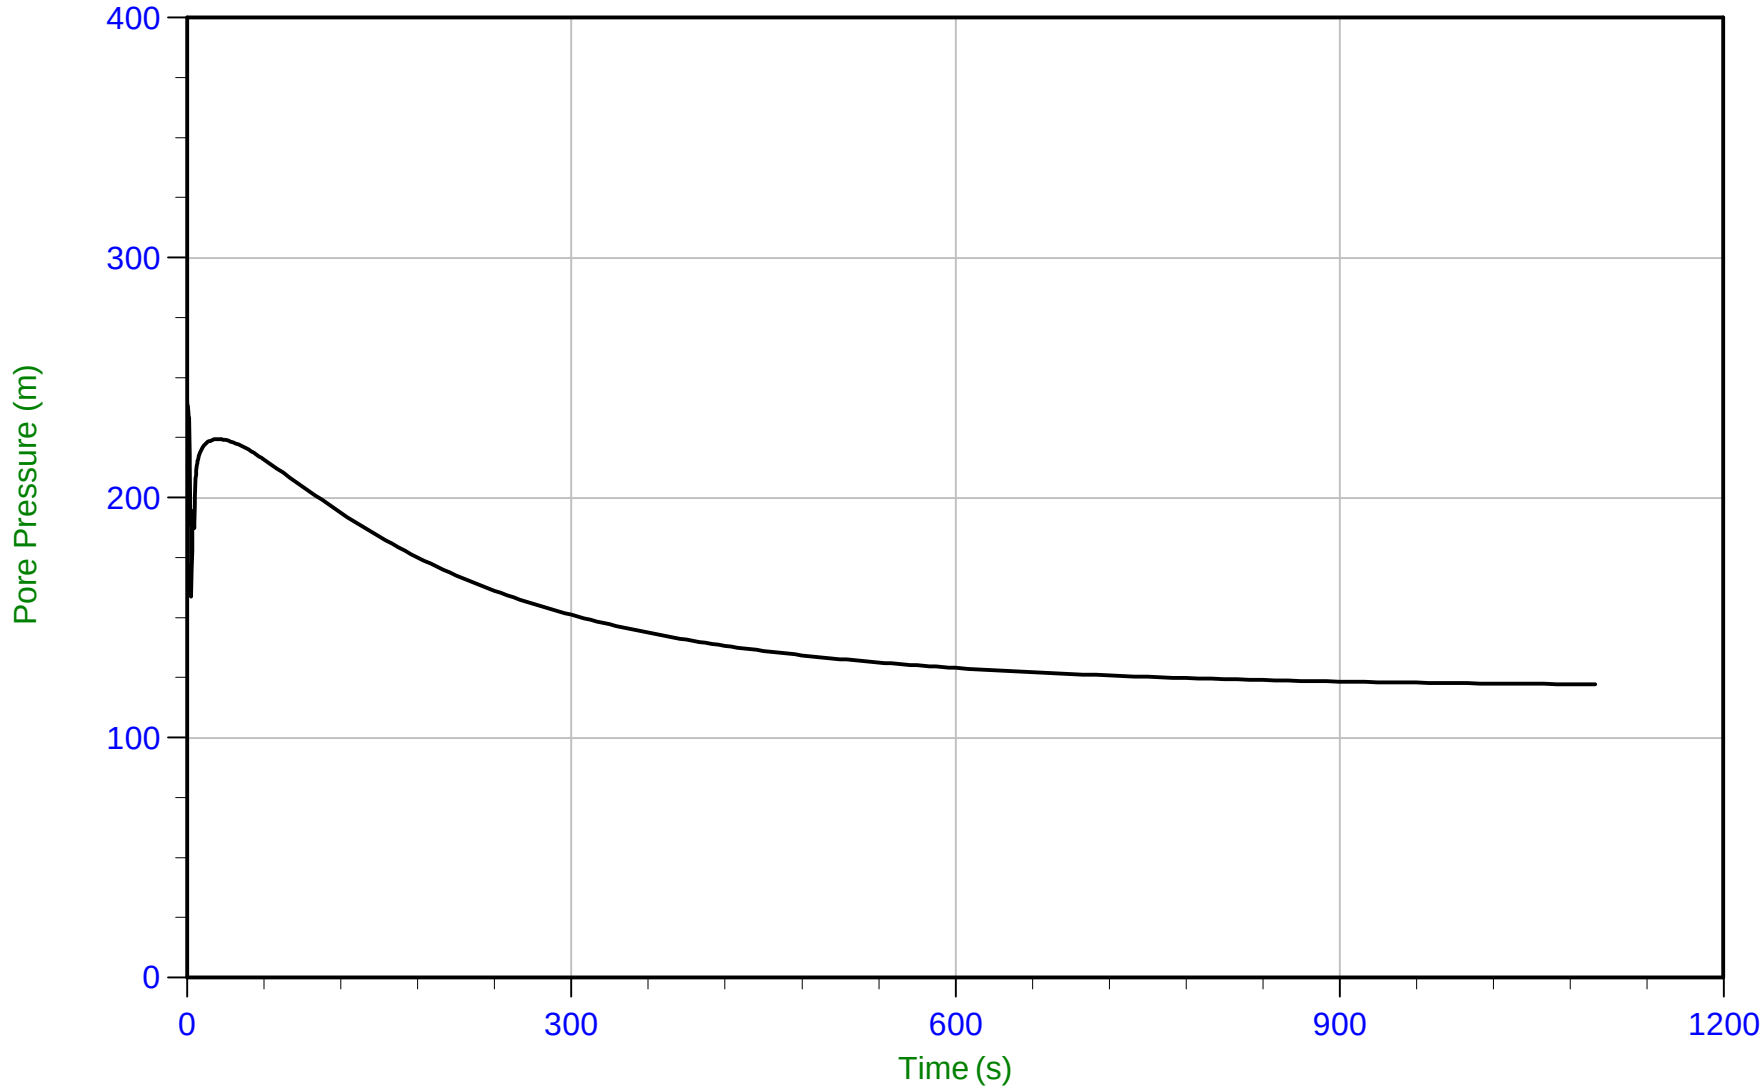

Trace Summary:

Filename: 22-02-23796_RP22-22CPT170.PPF
Depth: 9.100 m / 29.855 ft
Duration: 1100.0 s

u Min: 122.2 m
u Max: 240.2 m
u Final: 122.2 m

WT: 1.100 m / 3.609 ft
Ueq: 8.0 m
U(50): 124.08 m


T(50): 839.6 s
Ir: 100
Ch: 0.8 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 15:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT200
Cone: 854:T1500F15U35 Area=15 cm²

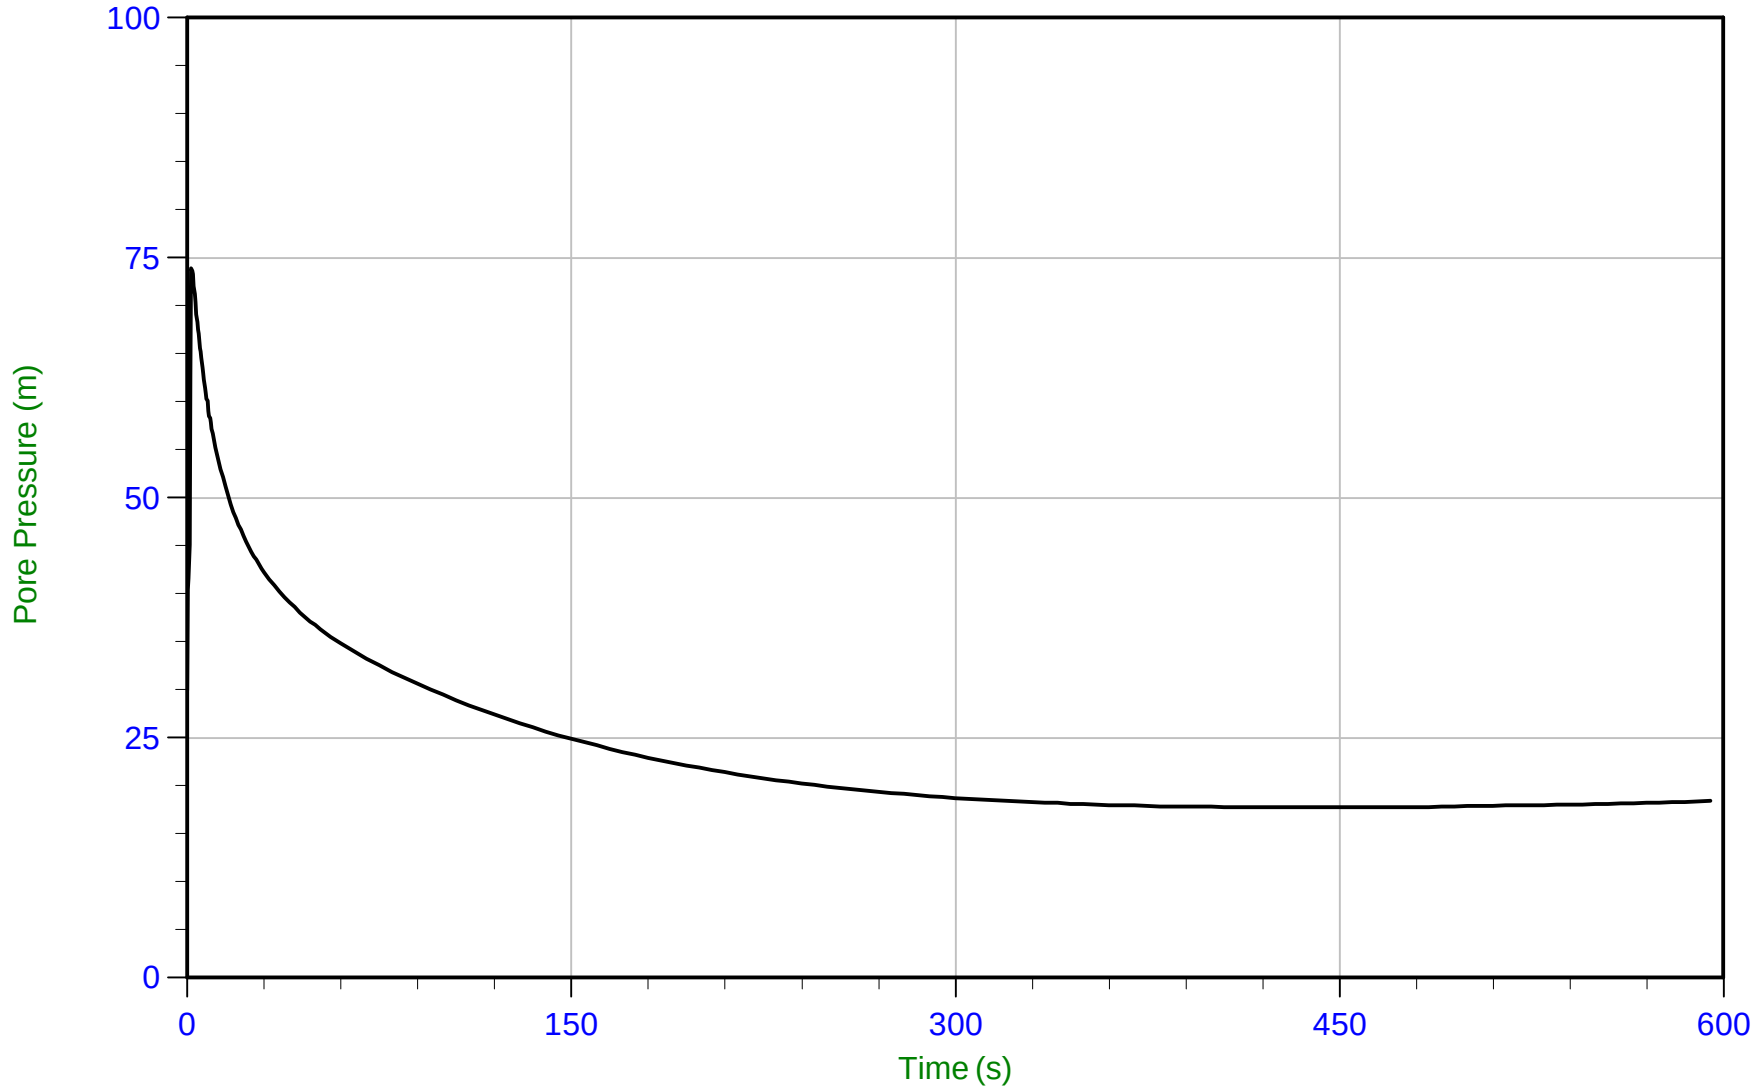

Trace Summary:

Filename: 22-02-23796_RP22-22CPT200.PPF
Depth: 5.875 m / 19.275 ft
Duration: 595.0 s


u Min: 17.7 m
u Max: 73.9 m
u Final: 18.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 15:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT200
Cone: 854:T1500F15U35 Area=15 cm²

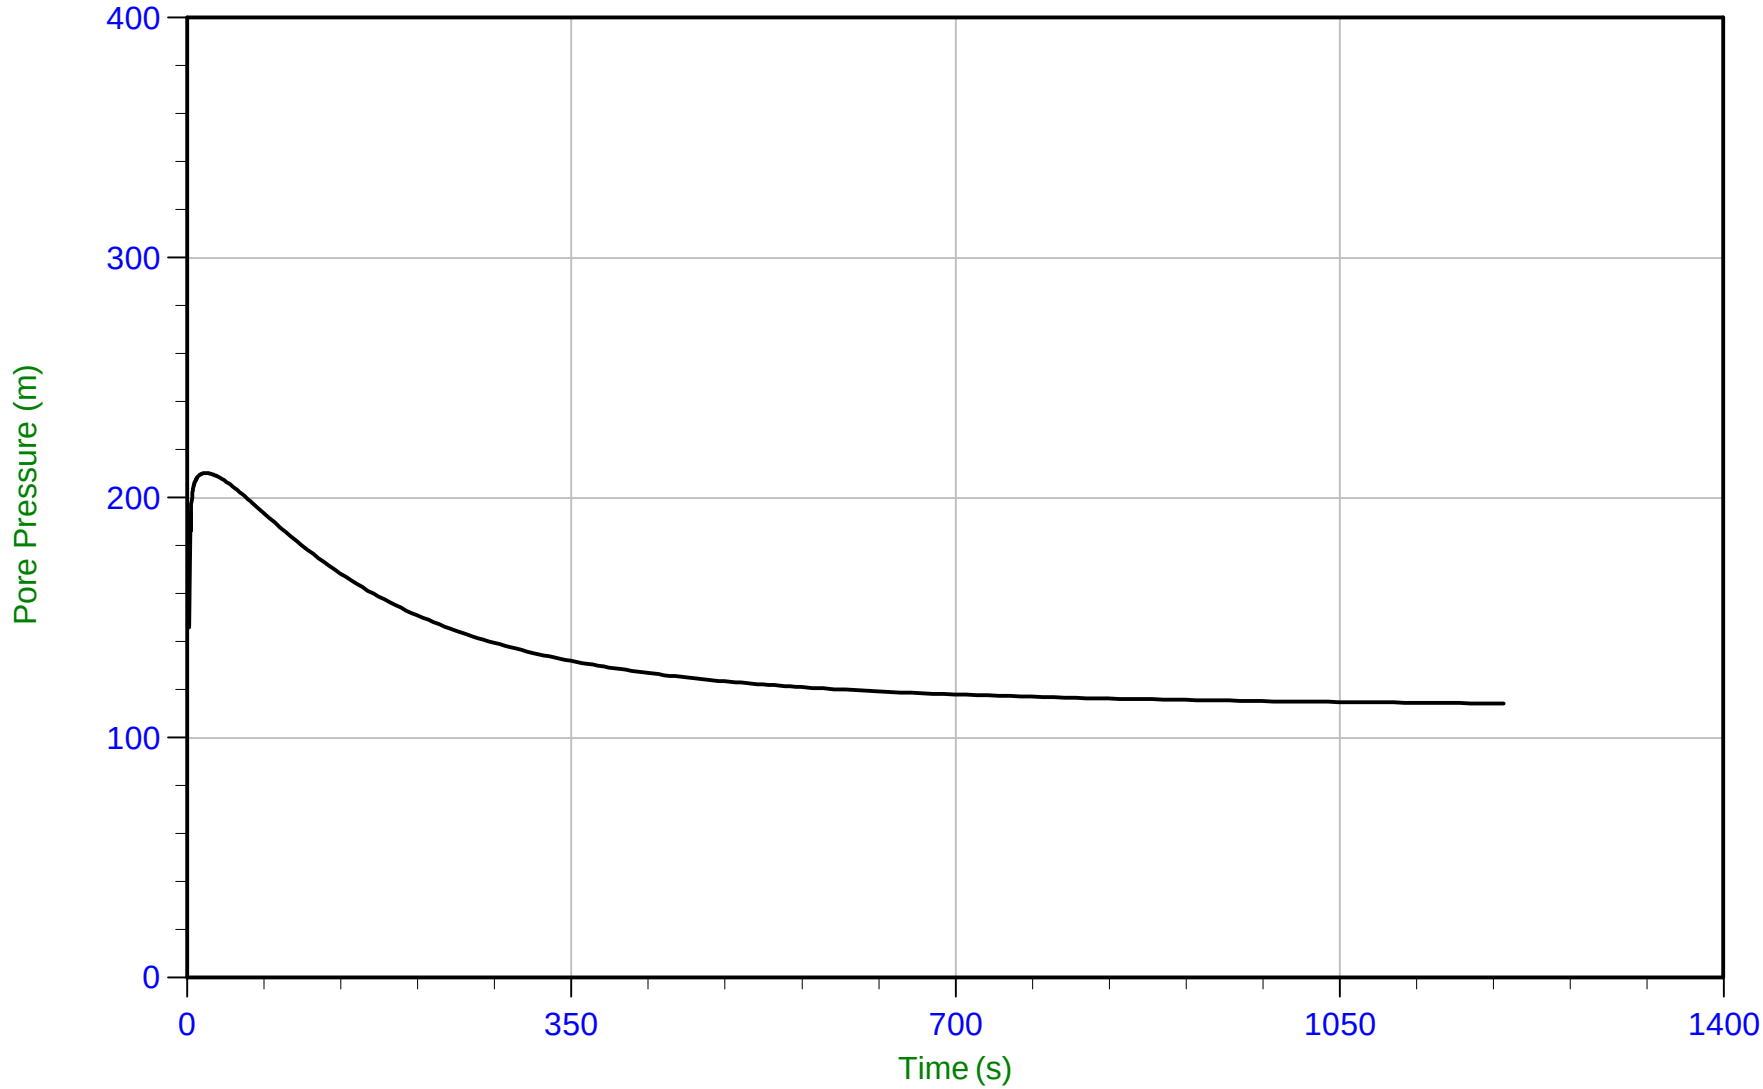

Trace Summary:

Filename: 22-02-23796_RP22-22CPT200.PPF
Depth: 7.125 m / 23.376 ft
Duration: 1200.0 s


u Min: 114.3 m
u Max: 210.3 m
u Final: 114.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 16:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT201
Cone: 854:T1500F15U35 Area=15 cm²

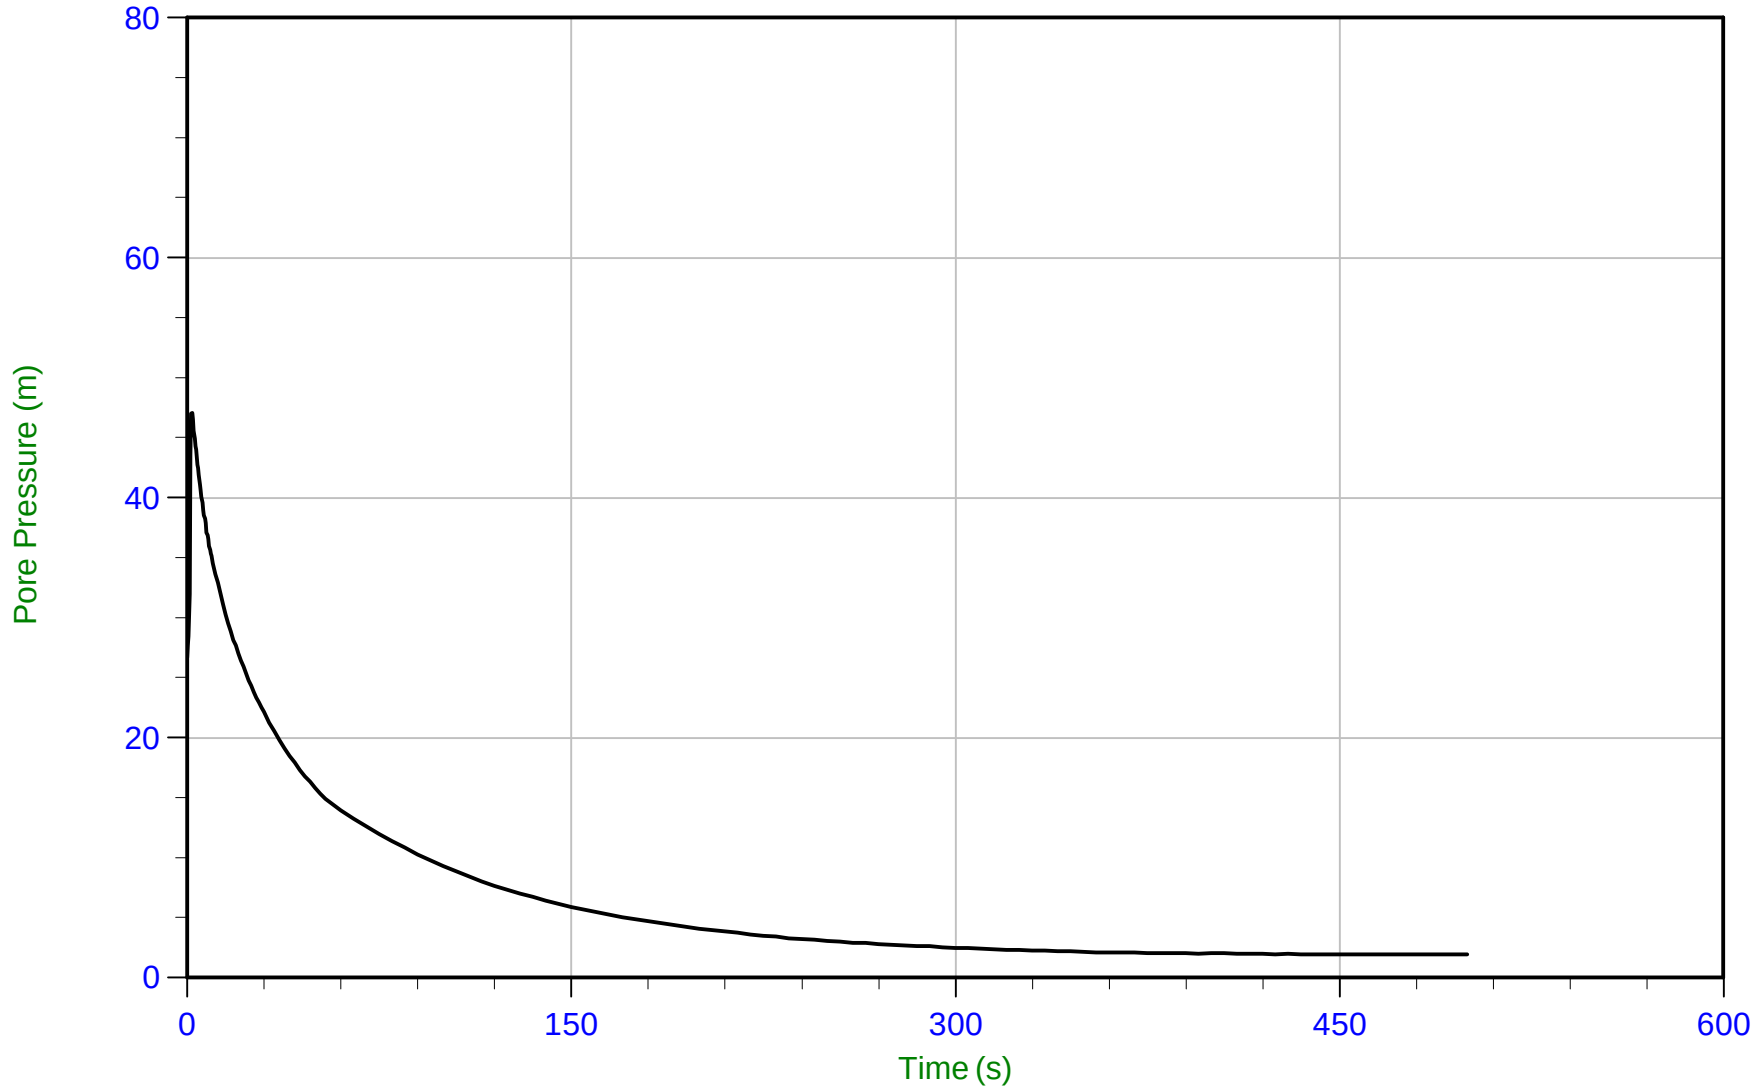

Trace Summary:

Filename: 22-02-23796_RP22-22CPT201.PPF
Depth: 4.875 m / 15.994 ft
Duration: 500.0 s

u Min: 1.9 m
u Max: 47.1 m
u Final: 1.9 m


WT: 3.000 m / 9.842 ft
Ueq: 1.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 07:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT202
Cone: 854:T1500F15U35 Area=15 cm²

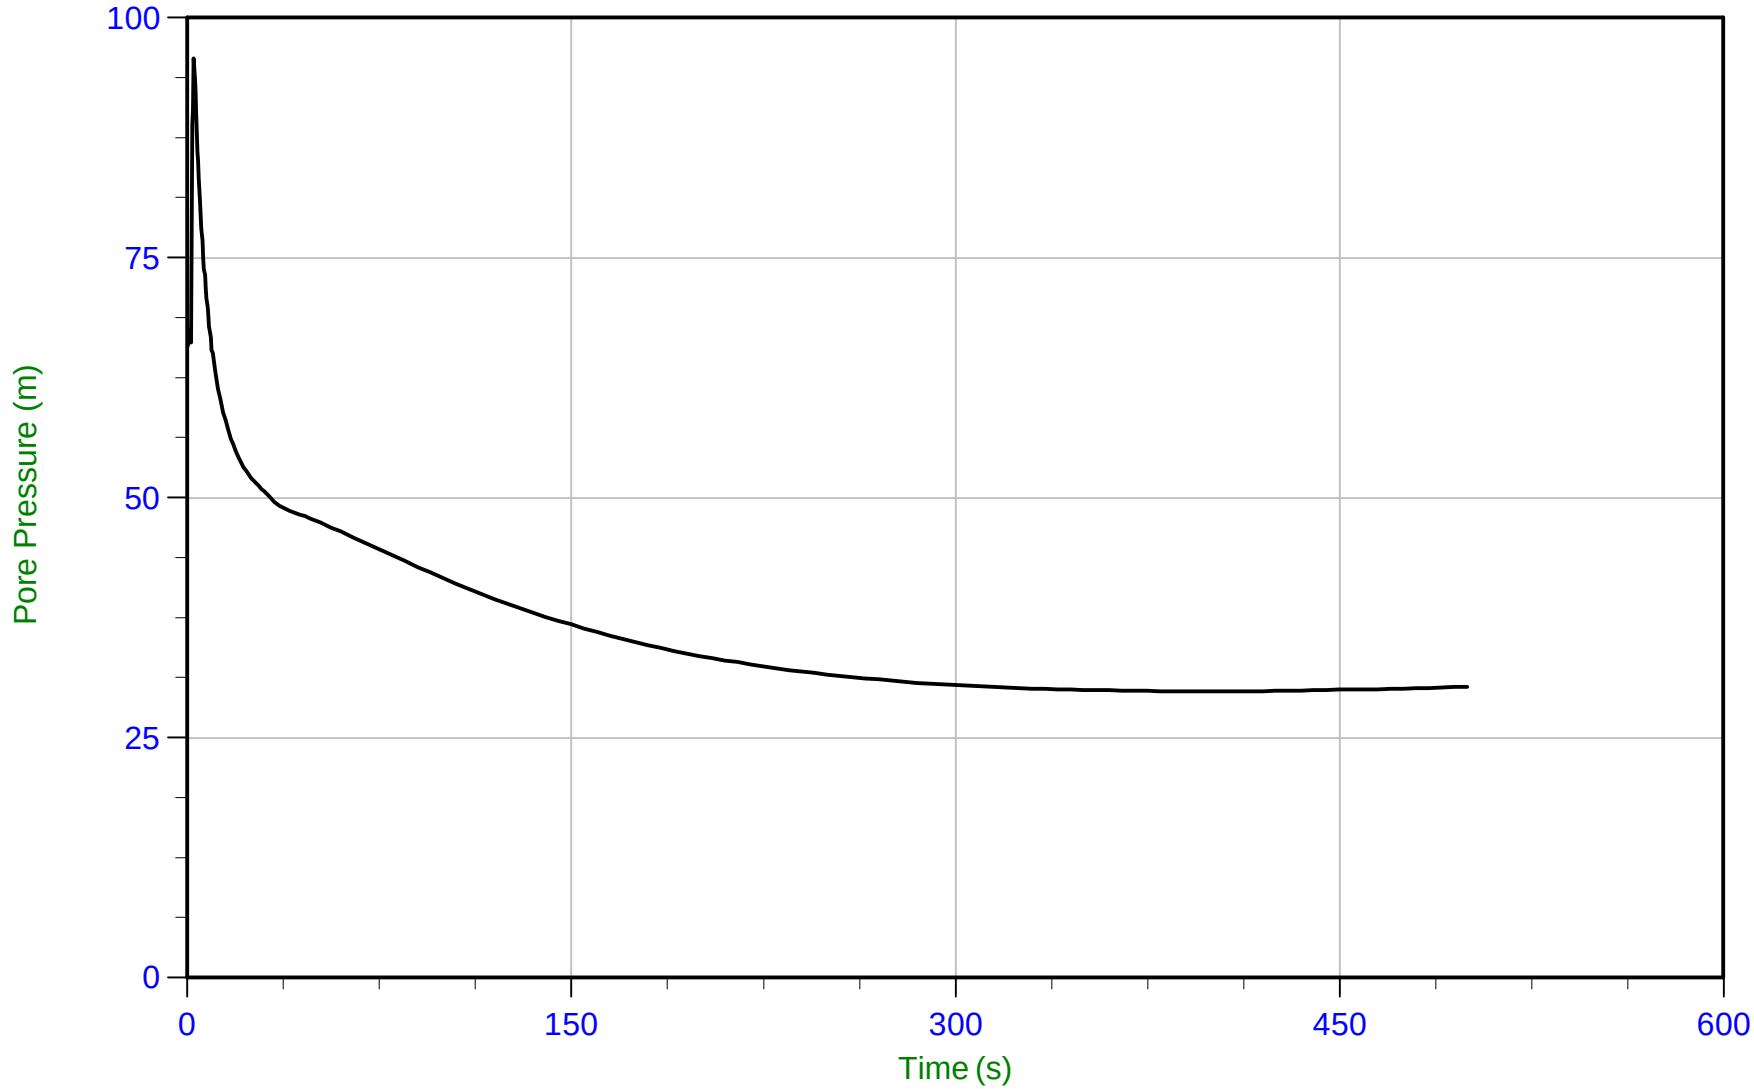

Trace Summary:

Filename: 22-02-23796_RP22-22CPT202.PPF
Depth: 4.775 m / 15.666 ft
Duration: 500.0 s


u Min: 29.8 m
u Max: 95.8 m
u Final: 30.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 07:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT202
Cone: 854:T1500F15U35 Area=15 cm²

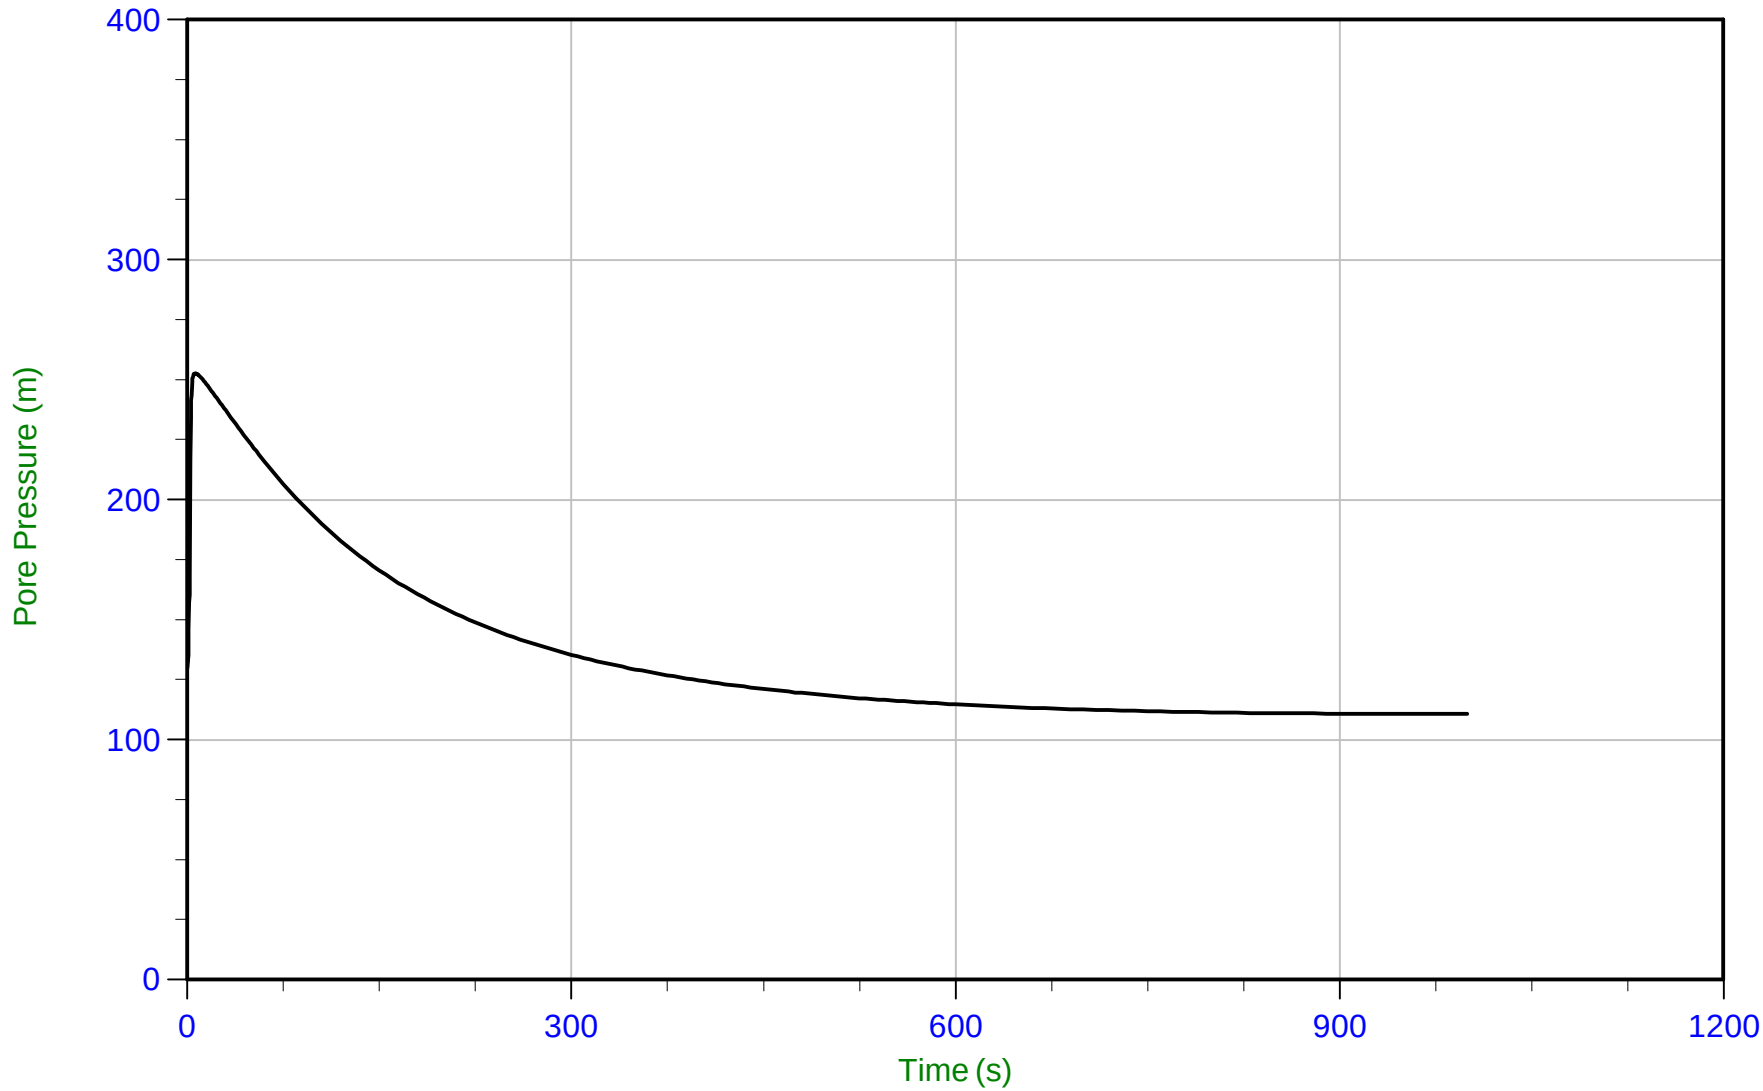

Trace Summary:

Filename: 22-02-23796_RP22-22CPT202.PPF
Depth: 8.325 m / 27.313 ft
Duration: 1000.0 s

u Min: 110.8 m
u Max: 252.7 m
u Final: 110.9 m


WT: 2.000 m / 6.562 ft
Ueq: 6.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 08:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT203
Cone: 854:T1500F15U35 Area=15 cm²

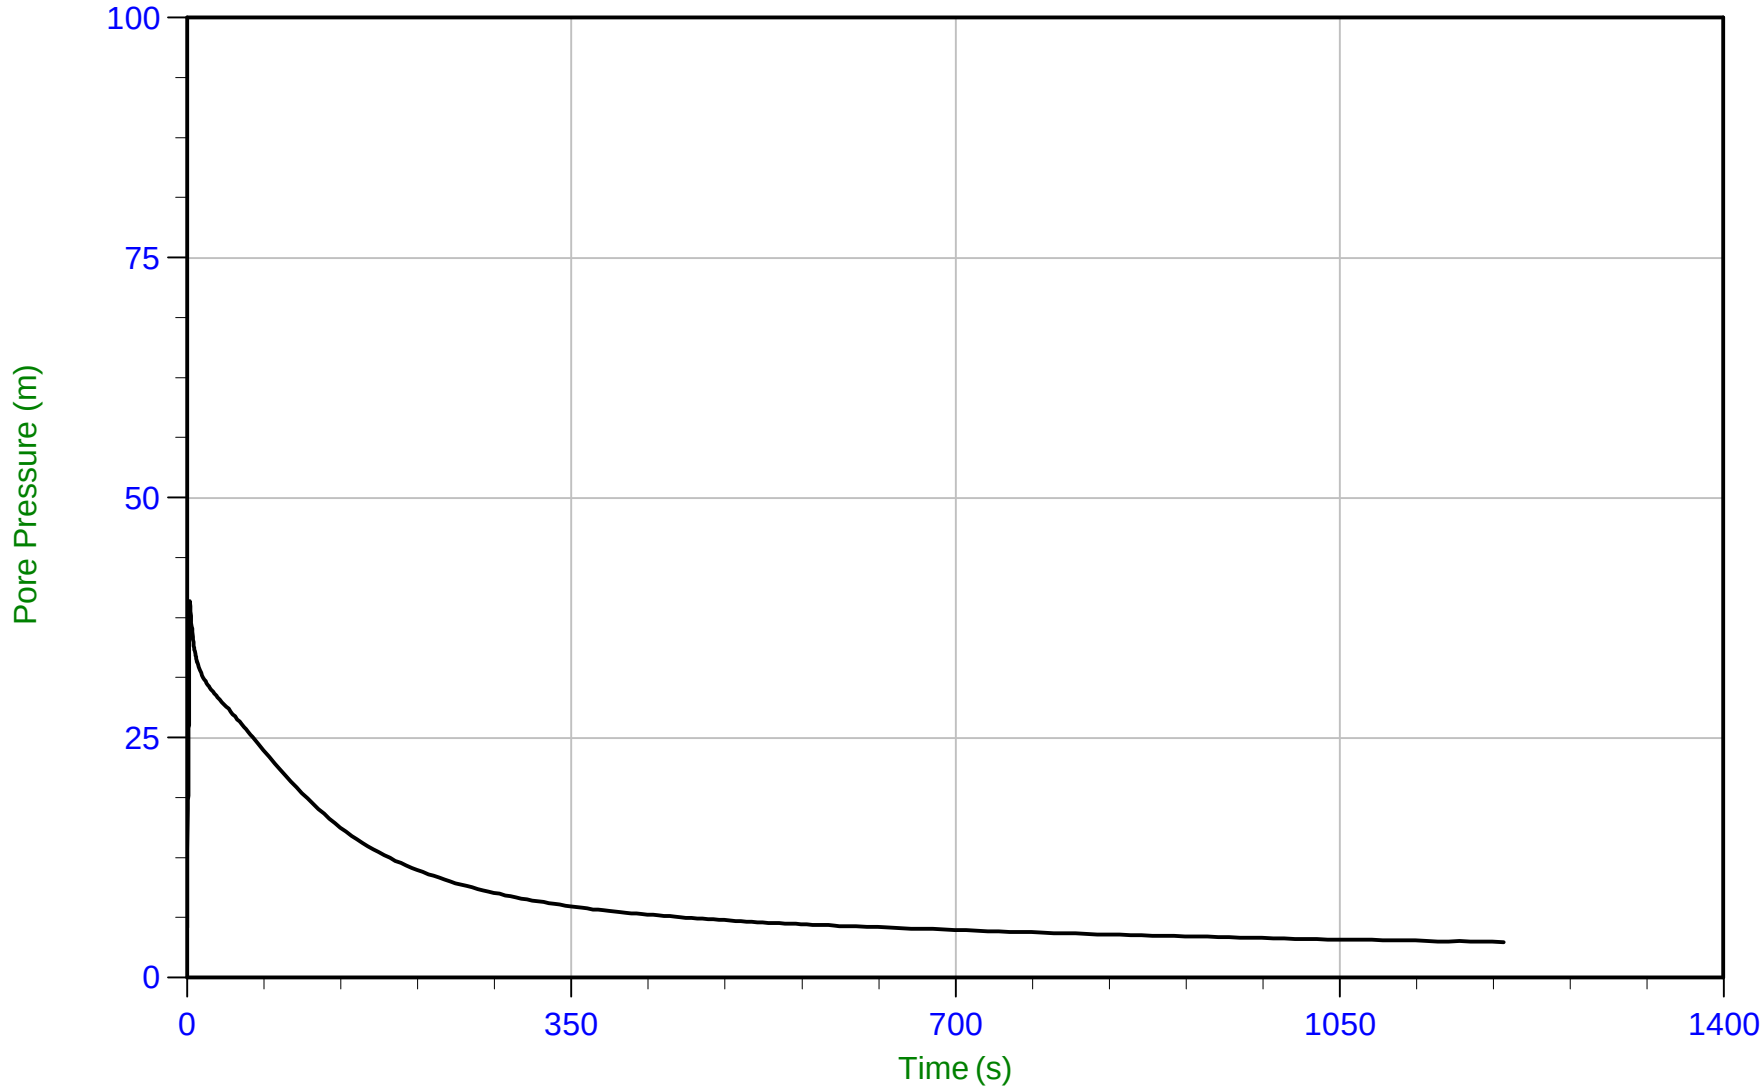

Trace Summary:

Filename: 22-02-23796_RP22-22CPT203.PPF
Depth: 3.925 m / 12.877 ft
Duration: 1200.0 s

u Min: 3.7 m
u Max: 39.3 m
u Final: 3.7 m

WT: 2.000 m / 6.562 ft
Ueq: 1.9 m
U(50): 20.59 m


T(50): 90.9 s
Ir: 100
Ch: 7.7 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 09:40
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT204
Cone: 854:T1500F15U35 Area=15 cm²

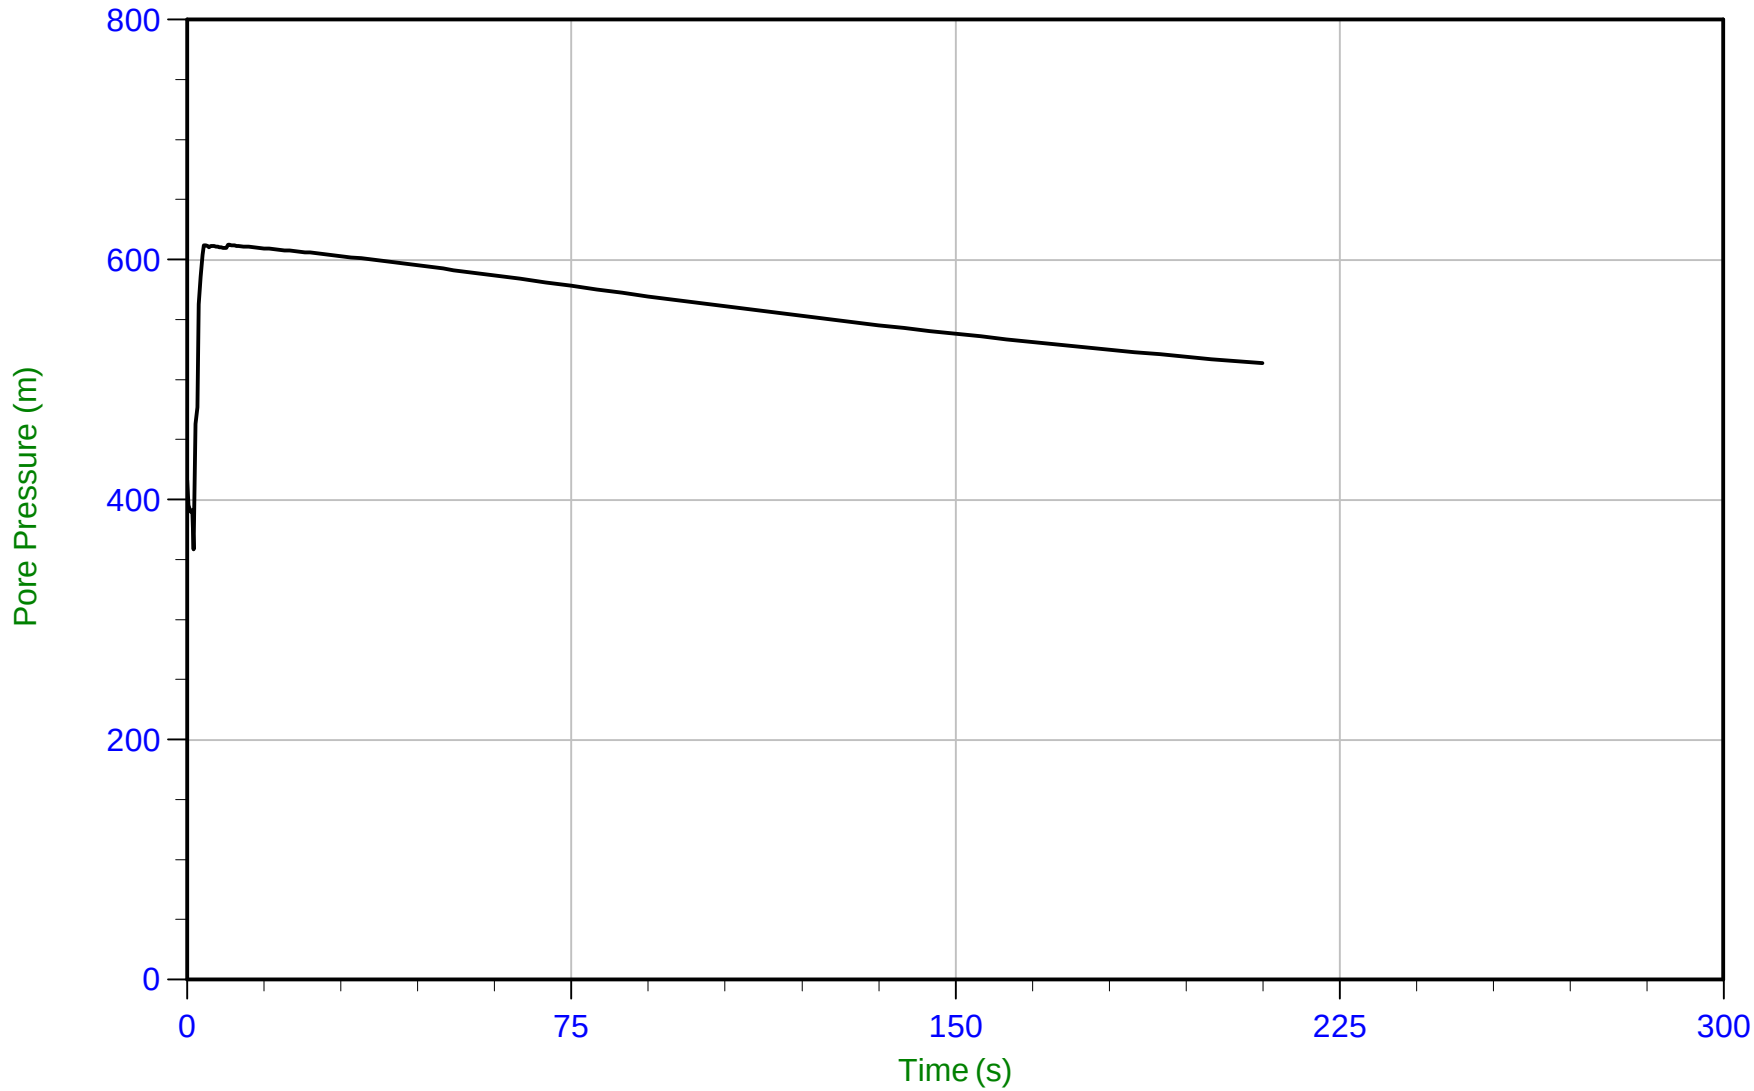

Trace Summary:

Filename: 22-02-23796_RS22-22CPT204.PPF
Depth: 5.600 m / 18.372 ft
Duration: 210.0 s


u Min: 358.8 m
u Max: 612.4 m
u Final: 513.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 10:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT205
Cone: 854:T1500F15U35 Area=15 cm²

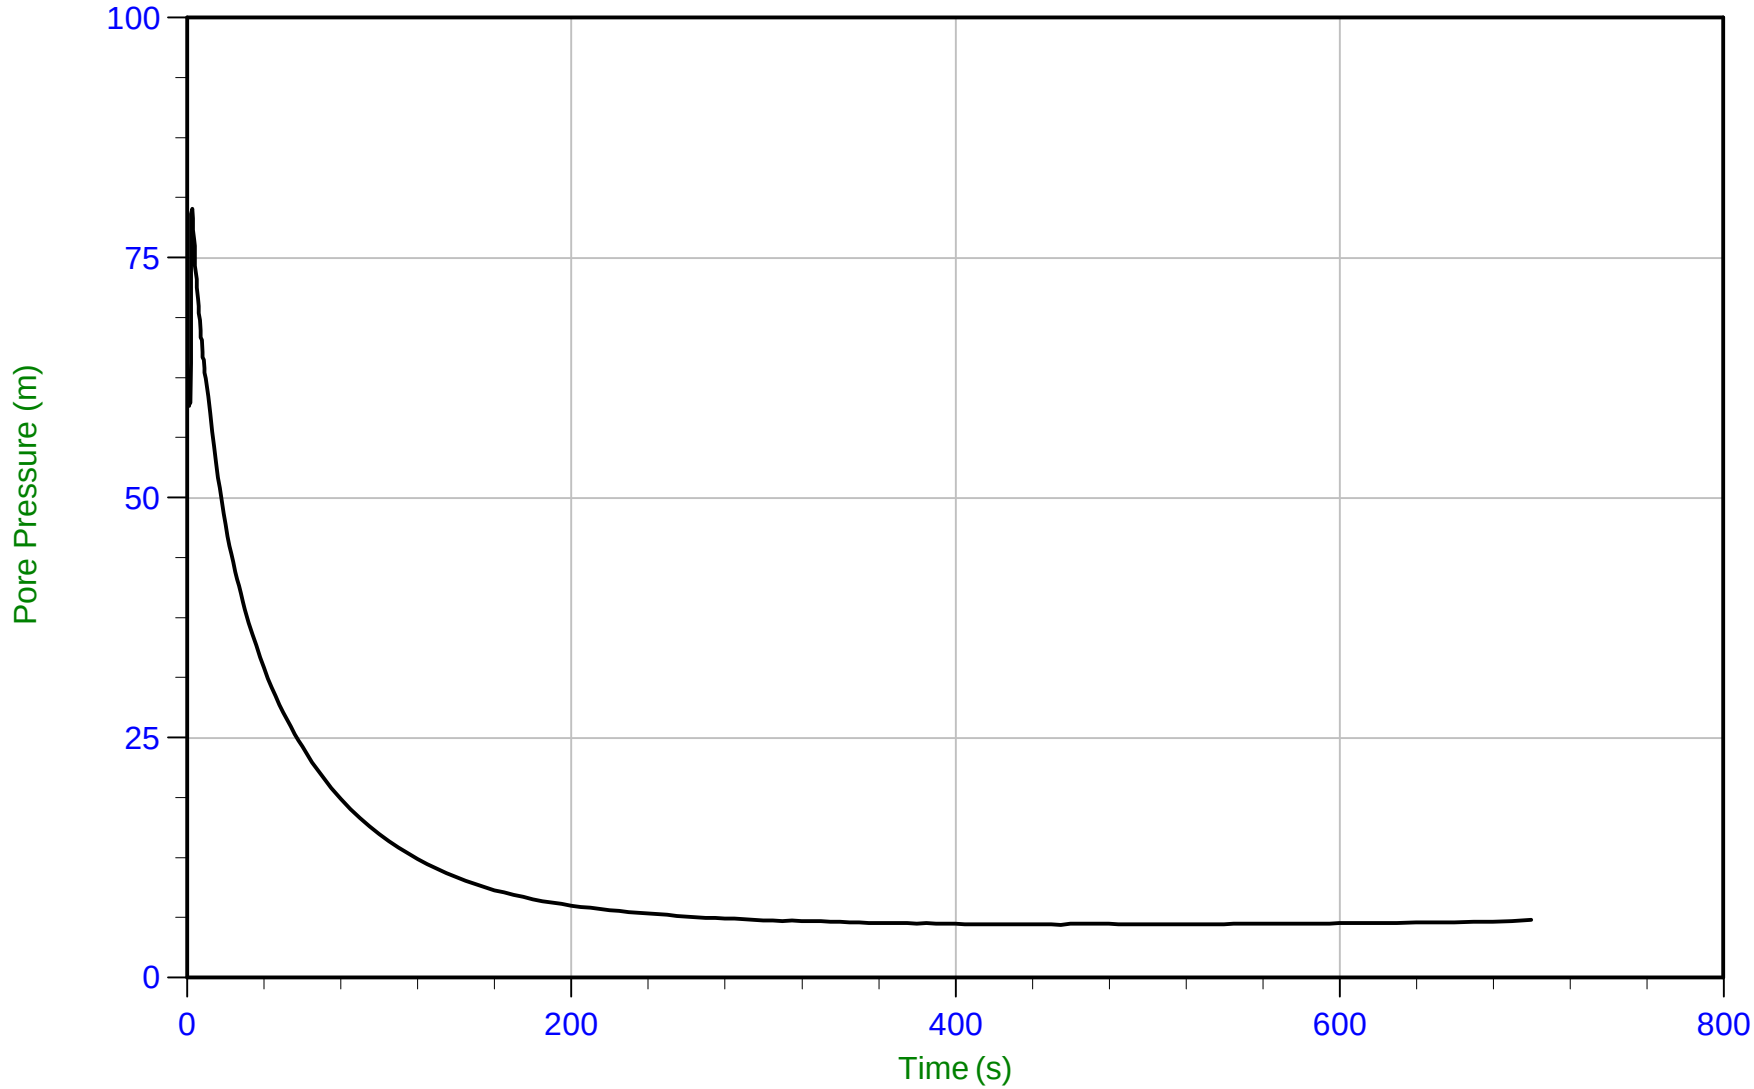

Trace Summary:

Filename: 22-02-23796_RP22-22CPT205.PPF
Depth: 4.850 m / 15.912 ft
Duration: 700.0 s

u Min: 5.5 m
u Max: 80.1 m
u Final: 6.0 m


WT: 1.500 m / 4.921 ft
Ueq: 3.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 10:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT205
Cone: 854:T1500F15U35 Area=15 cm²

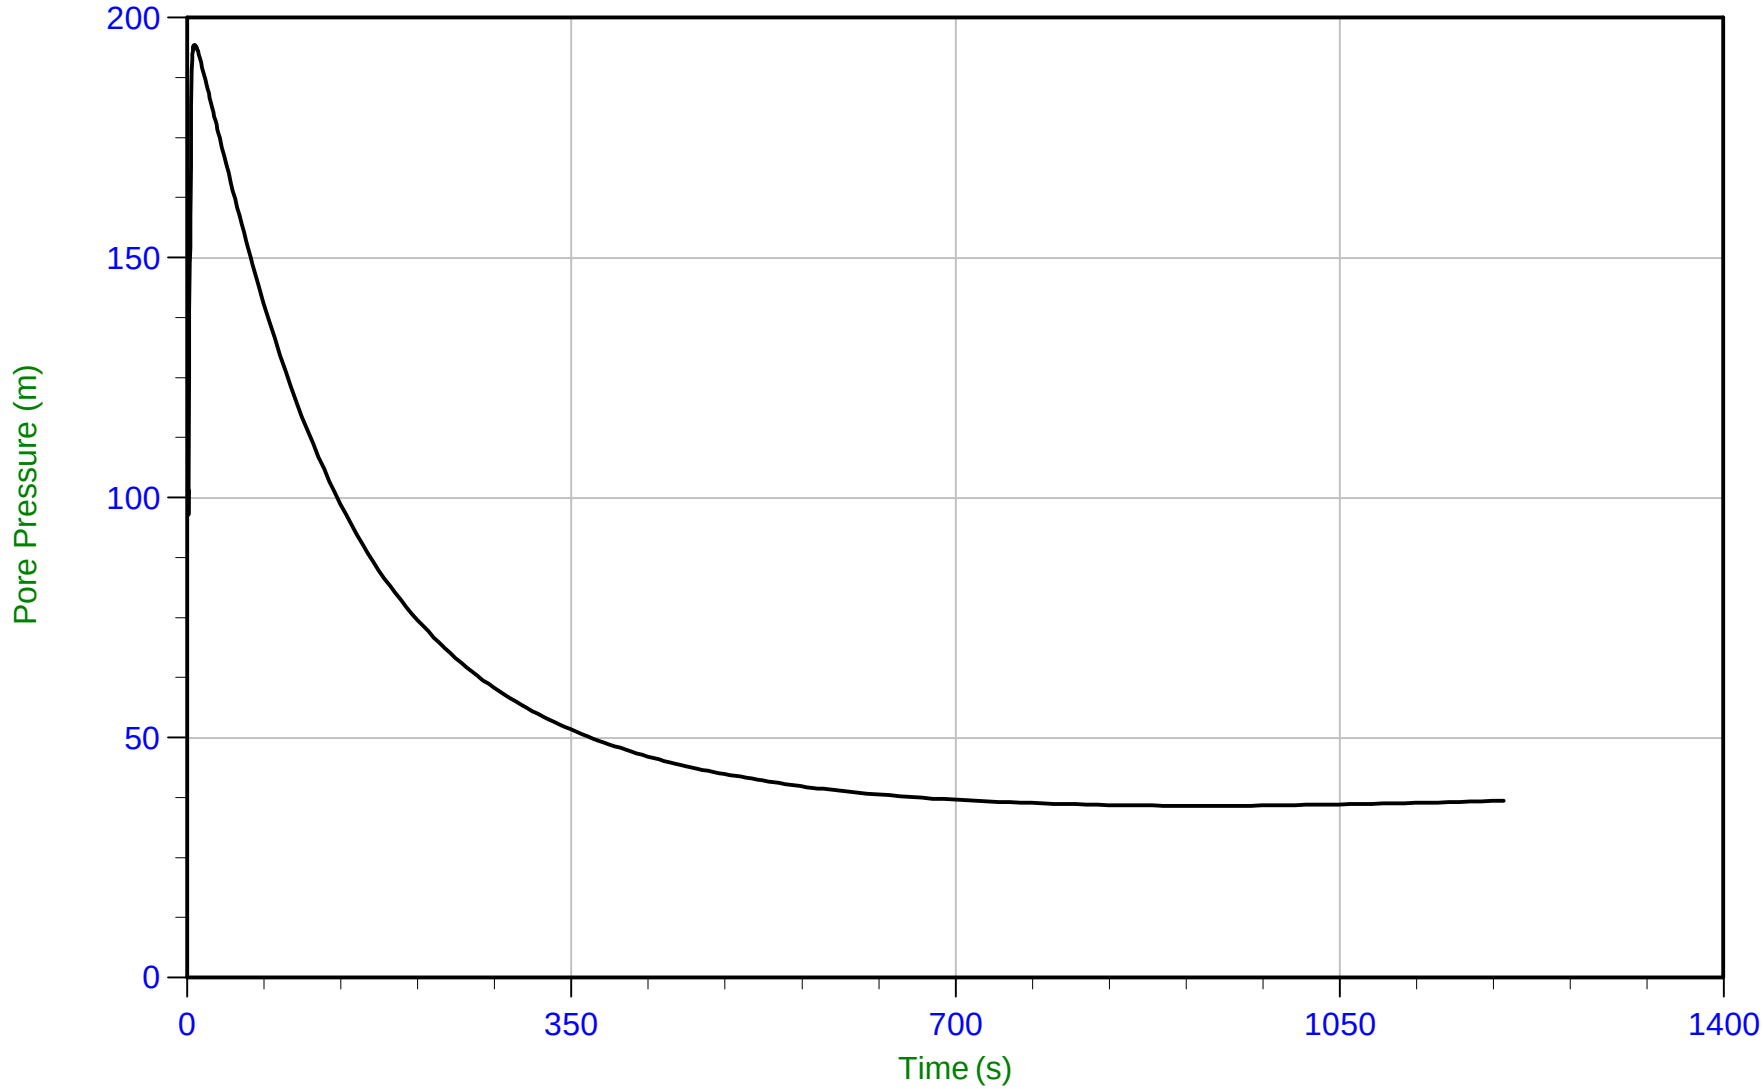

Trace Summary:

Filename: 22-02-23796_RP22-22CPT205.PPF
Depth: 7.850 m / 25.754 ft
Duration: 1200.0 s


u Min: 35.8 m
u Max: 194.4 m
u Final: 36.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 12:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT206
Cone: 854:T1500F15U35 Area=15 cm²

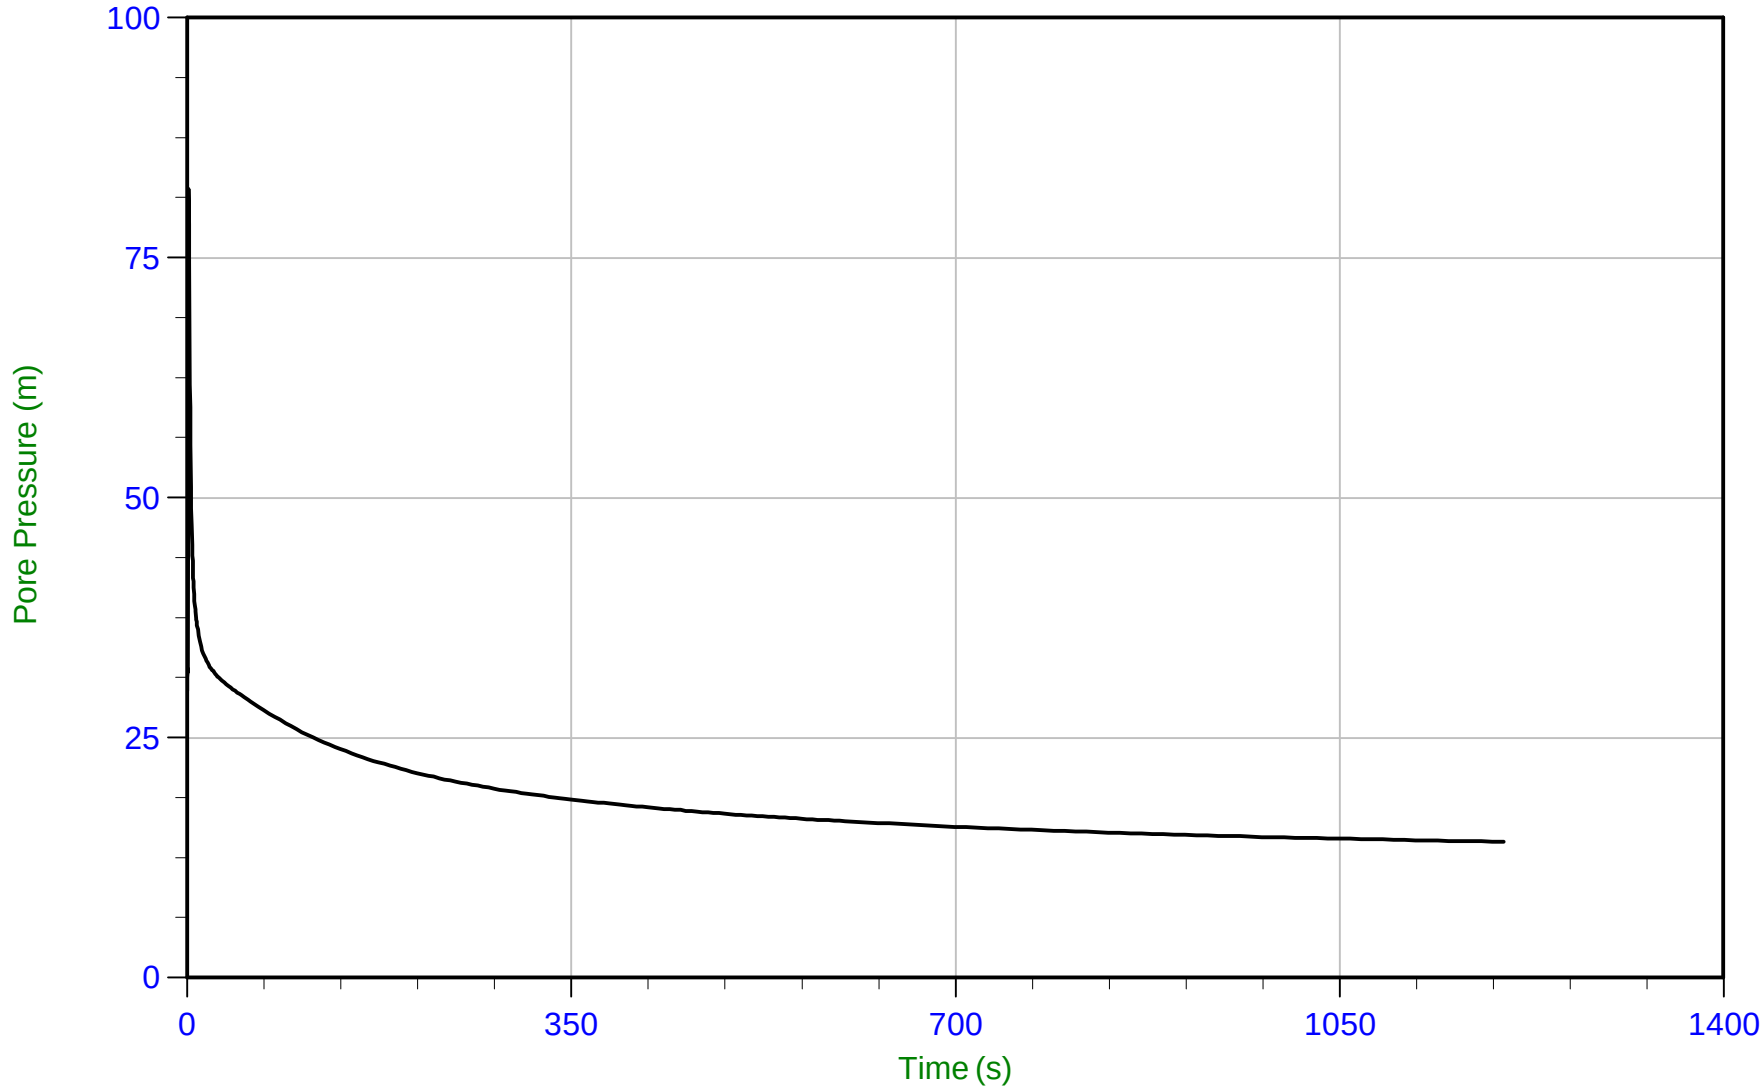

Trace Summary:

Filename: 22-02-23796_RP22-22CPT206.PPF
Depth: 3.725 m / 12.221 ft
Duration: 1200.0 s

u Min: 14.2 m
u Max: 82.2 m
u Final: 14.2 m


WT: 1.900 m / 6.234 ft
Ueq: 1.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 13:30
Site: Brooks, Alberta

Sounding: RCPT22-22CPT207
Cone: 854:T1500F15U35 Area=15 cm²

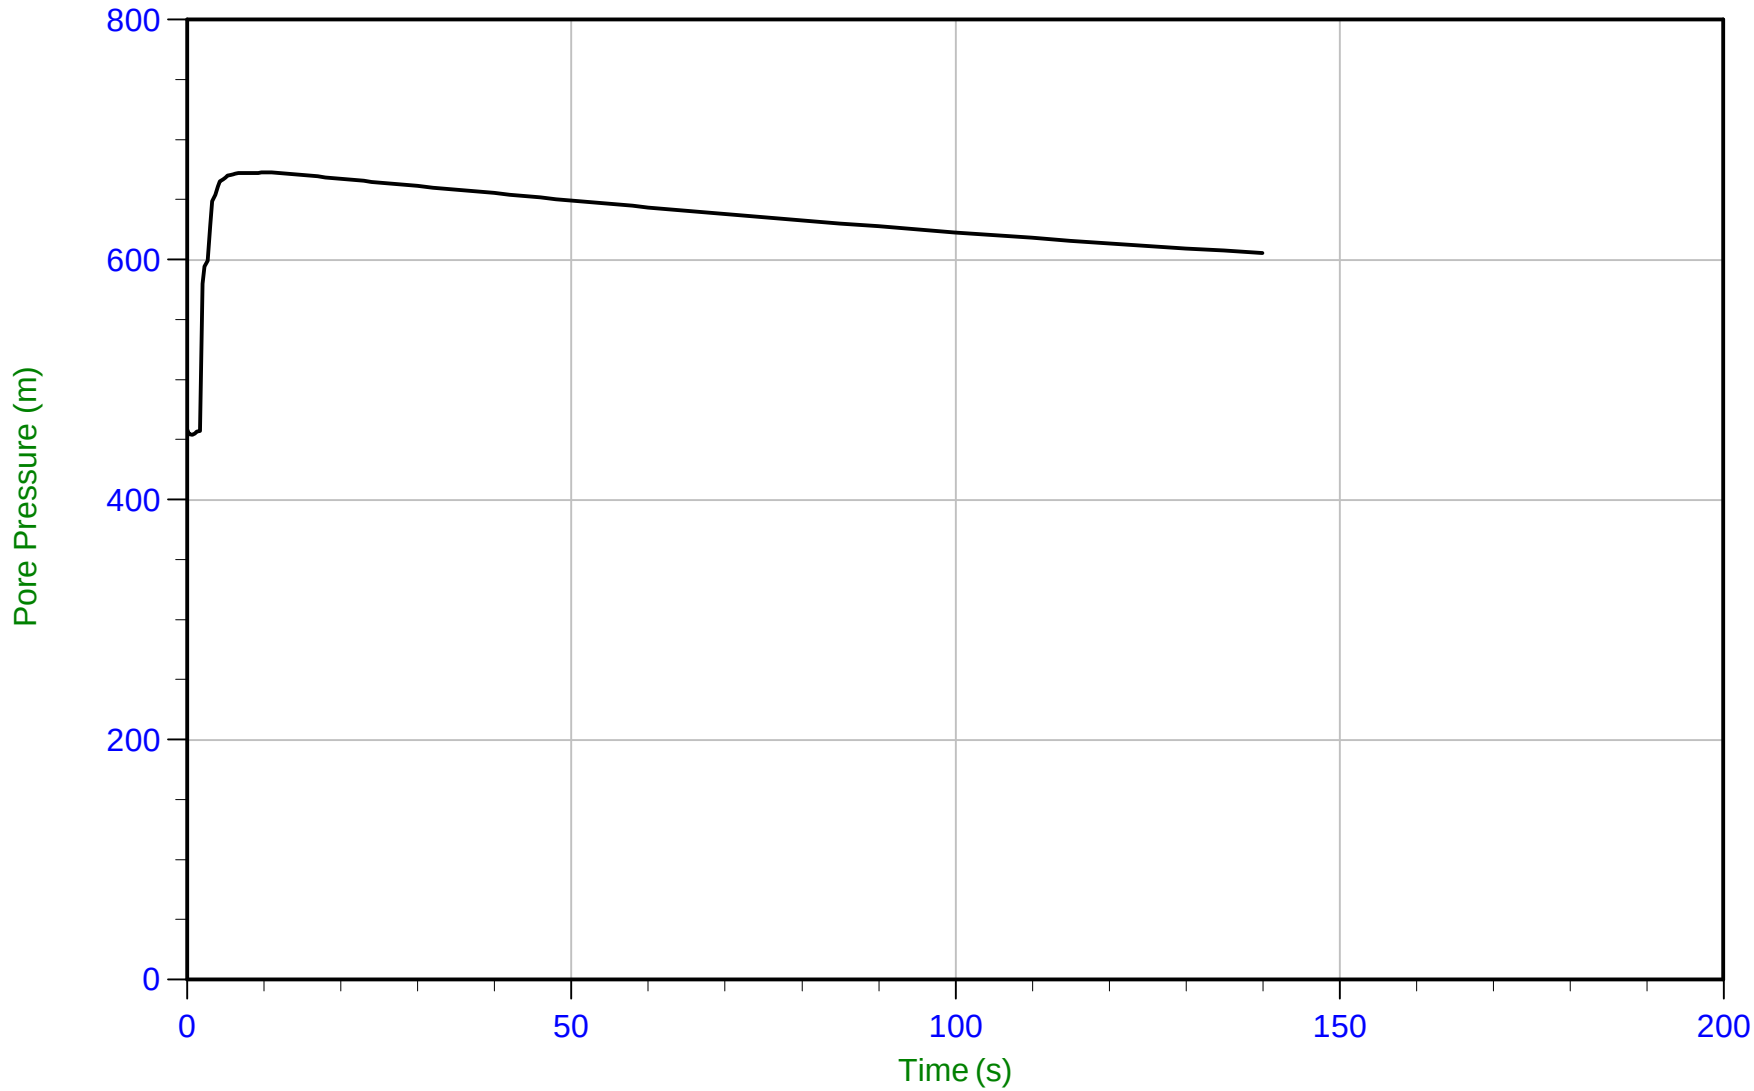

Trace Summary:

Filename: 22-02-23796_RP22-22CPT207.PPF
Depth: 5.900 m / 19.357 ft
Duration: 140.0 s


u Min: 454.3 m
u Max: 673.0 m
u Final: 605.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 14:06
Site: Brooks Alberta

Sounding: RCPT22-22CPT208
Cone: 854:T1500F15U35 Area=15 cm²

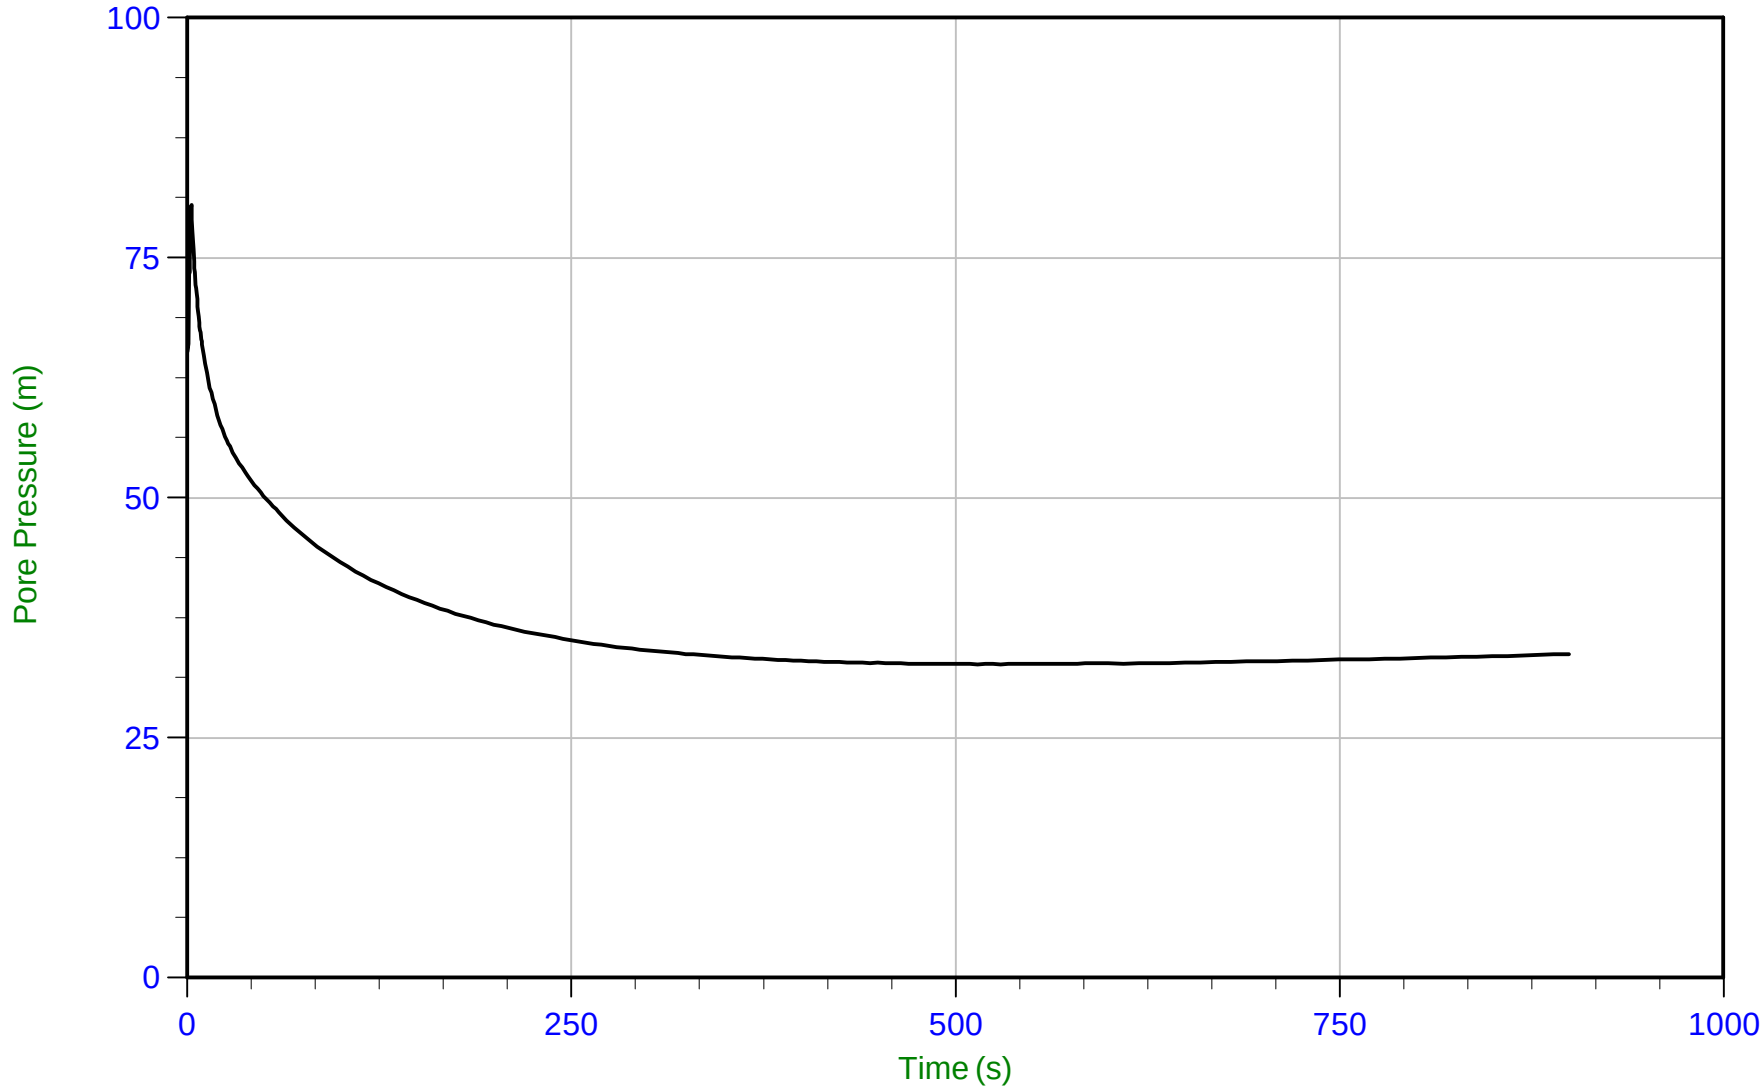

Trace Summary:

Filename: 22-02-23796_RP22-22CPT208.PPF
Depth: 5.050 m / 16.568 ft
Duration: 900.0 s


u Min: 32.7 m
u Max: 80.5 m
u Final: 33.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 15:07
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT209
Cone: 854:T1500F15U35 Area=15 cm²

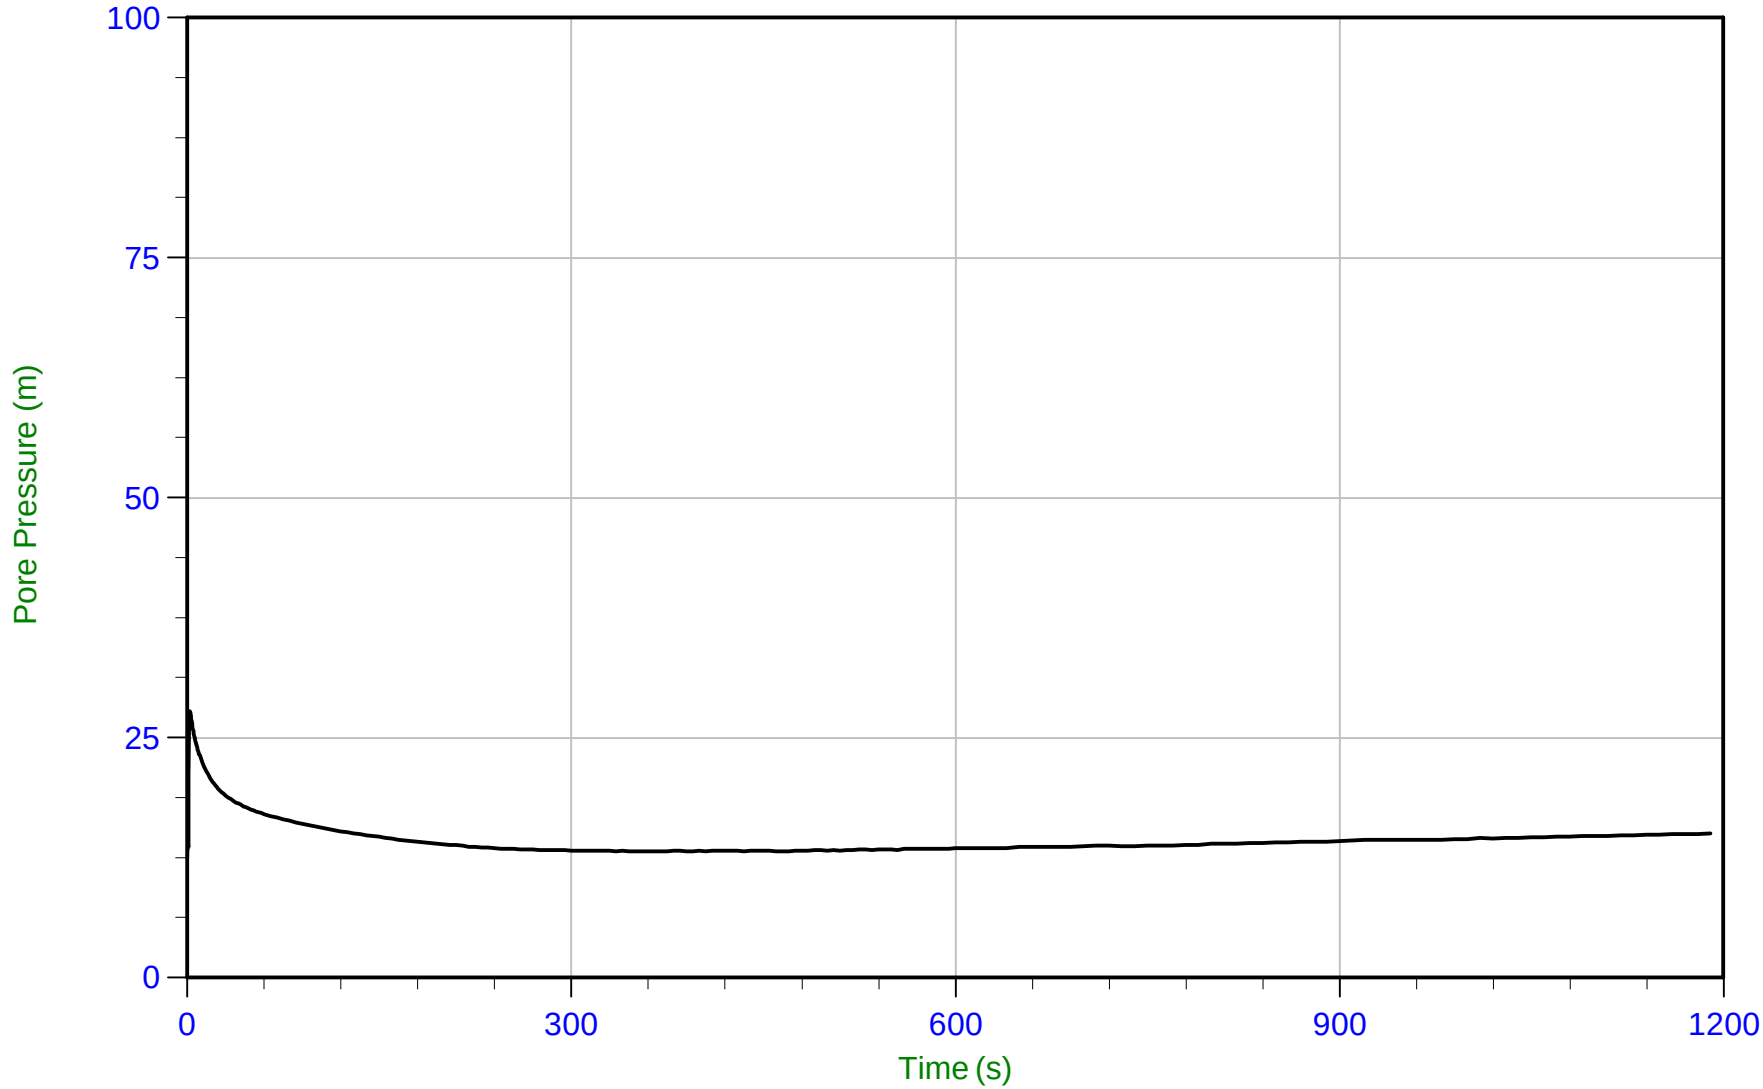

Trace Summary:

Filename: 22-02-23796_RS22-22CPT209.PPF
Depth: 4.925 m / 16.158 ft
Duration: 1190.0 s


u Min: 12.5 m
u Max: 27.7 m
u Final: 15.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 15:55
Site: Brooks, Alberta

Sounding: RCPT22-22CPT210
Cone: 854:T1500F15U35 Area=15 cm²

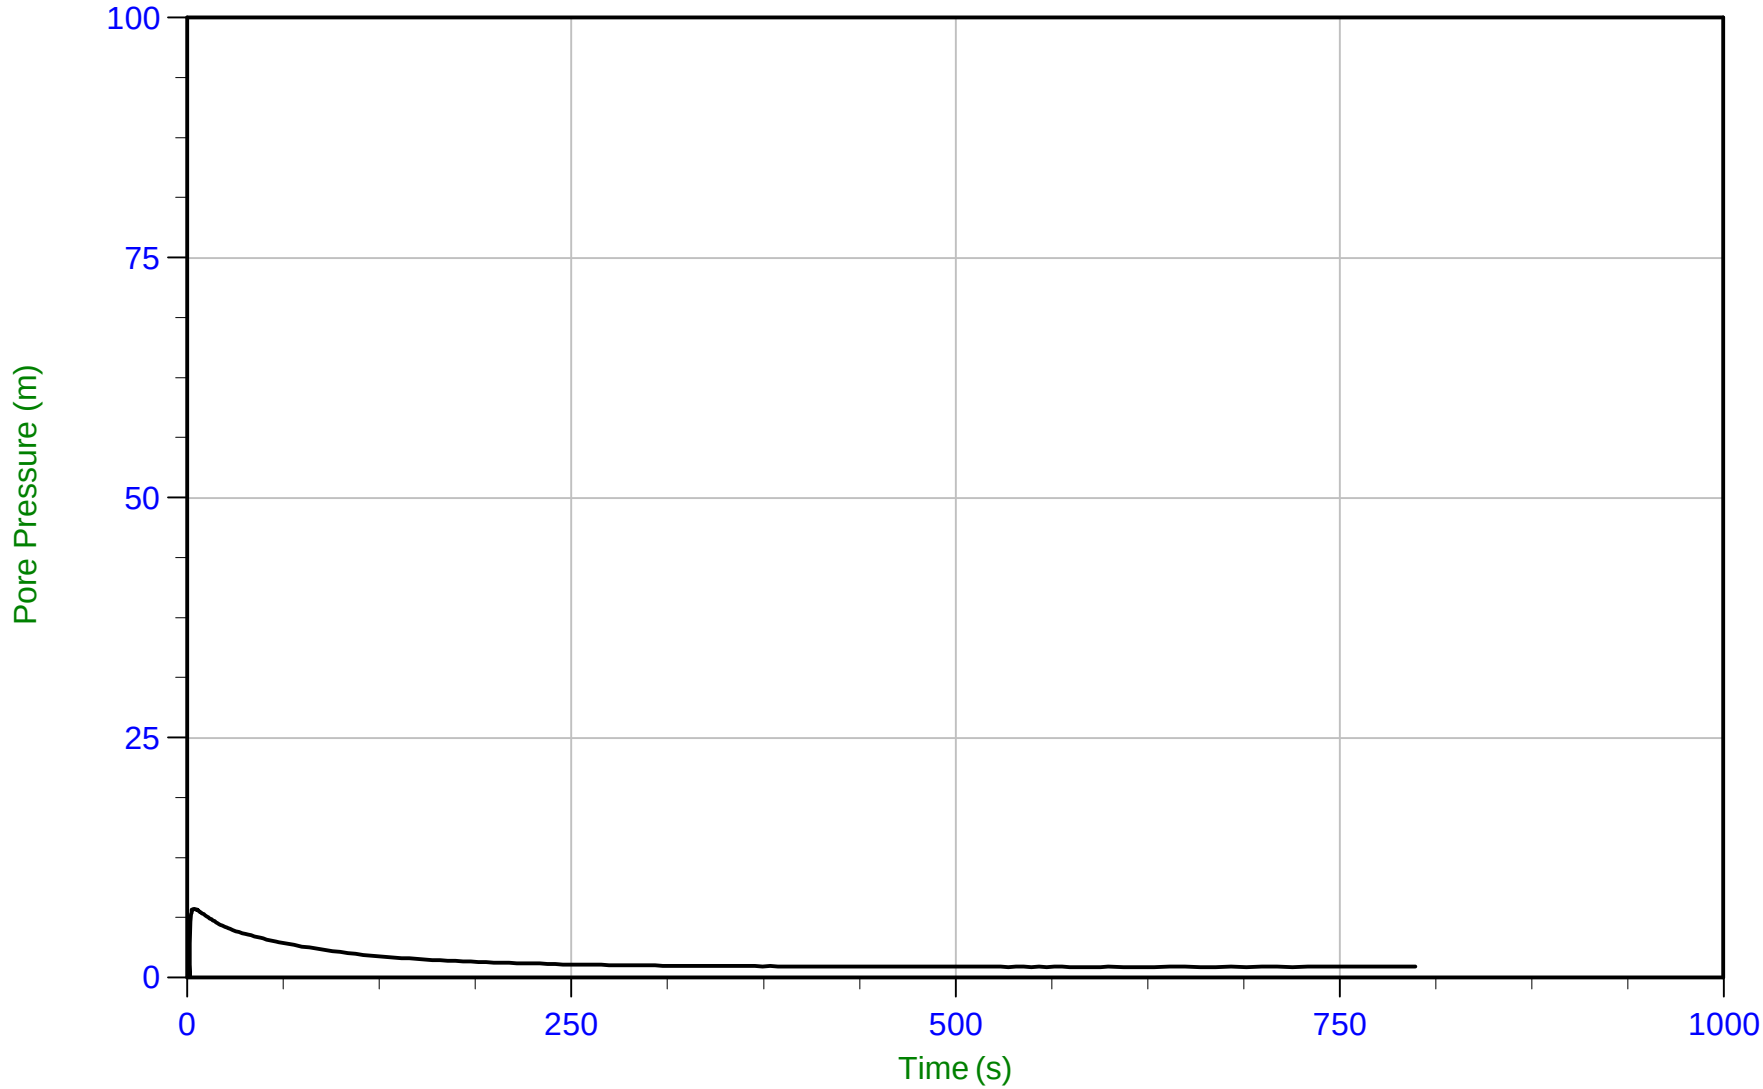

Trace Summary:

Filename: 22-02-23796_RP22-22CPT210.PPF
Depth: 3.850 m / 12.631 ft
Duration: 800.0 s

u Min: -0.2 m
u Max: 7.2 m
u Final: 1.2 m


WT: 2.692 m / 8.832 ft
Ueq: 1.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 16:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT211
Cone: 854:T1500F15U35 Area=15 cm²

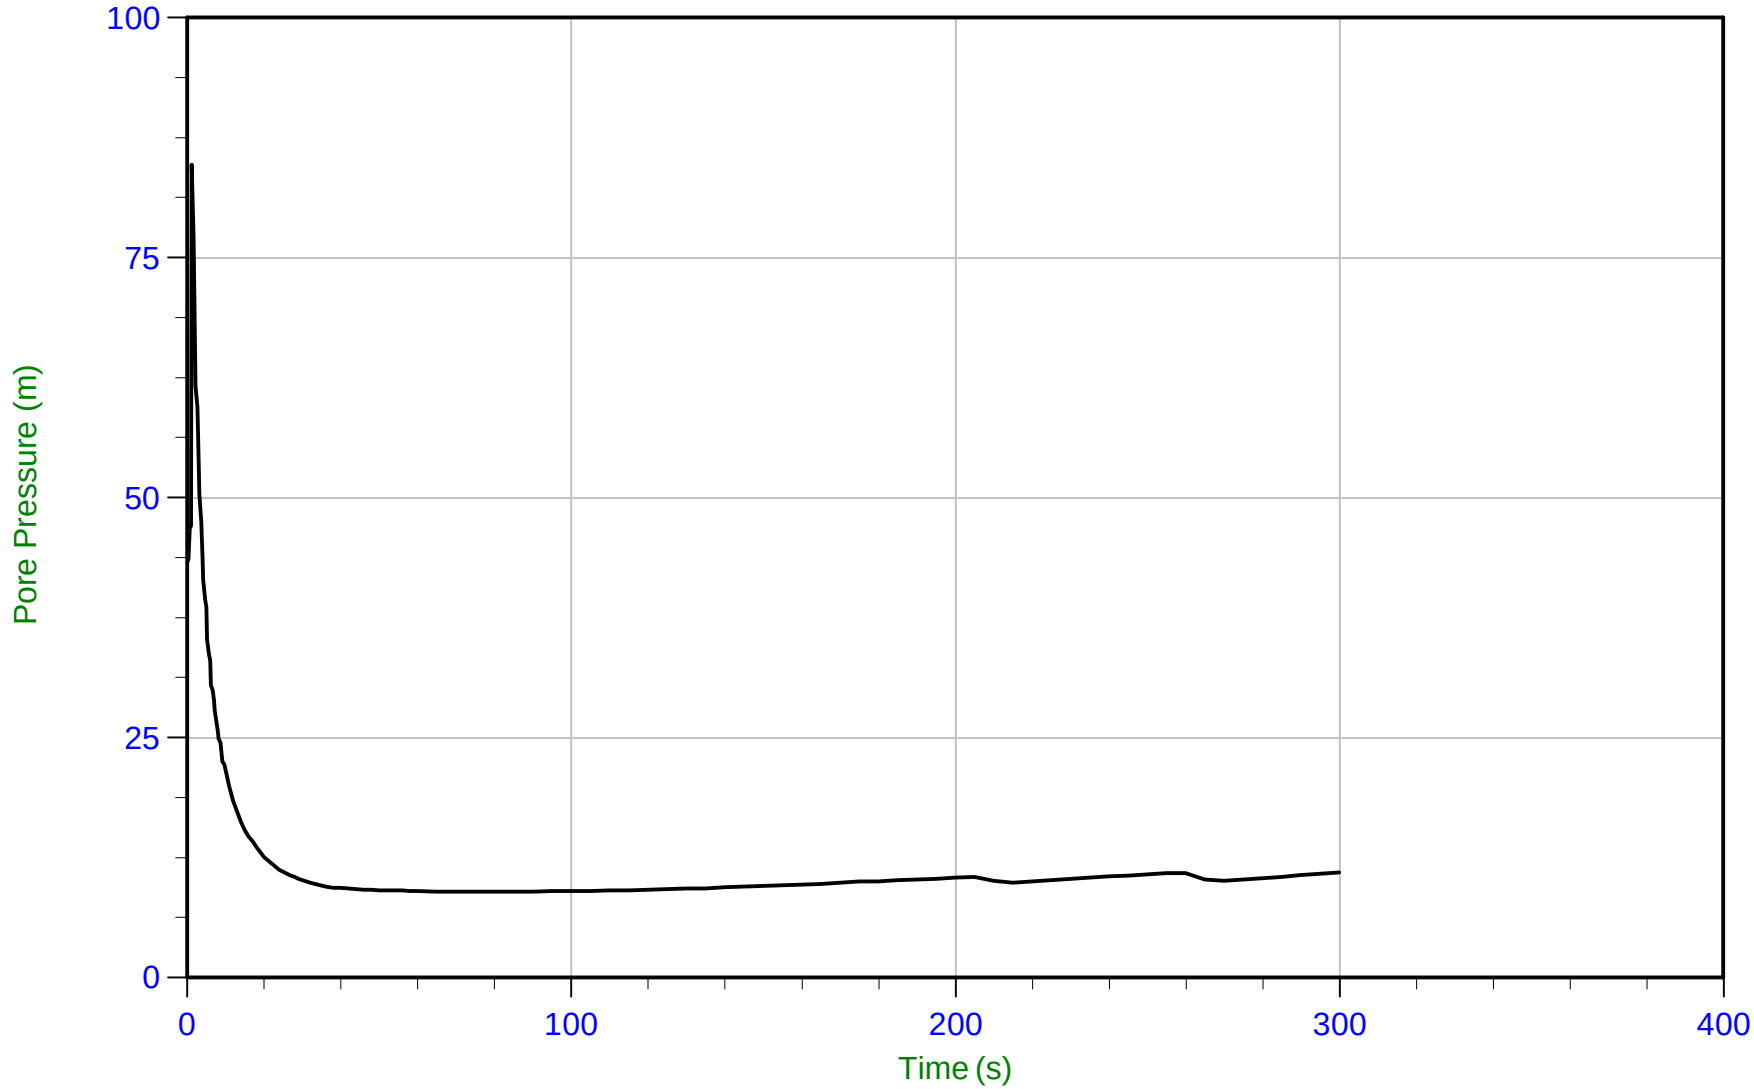

Trace Summary:

Filename: 22-02-23796_RP22-22CPT211.PPF
Depth: 3.750 m / 12.303 ft
Duration: 300.0 s


u Min: 9.0 m
u Max: 84.7 m
u Final: 11.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 16:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT211
Cone: 854:T1500F15U35 Area=15 cm²

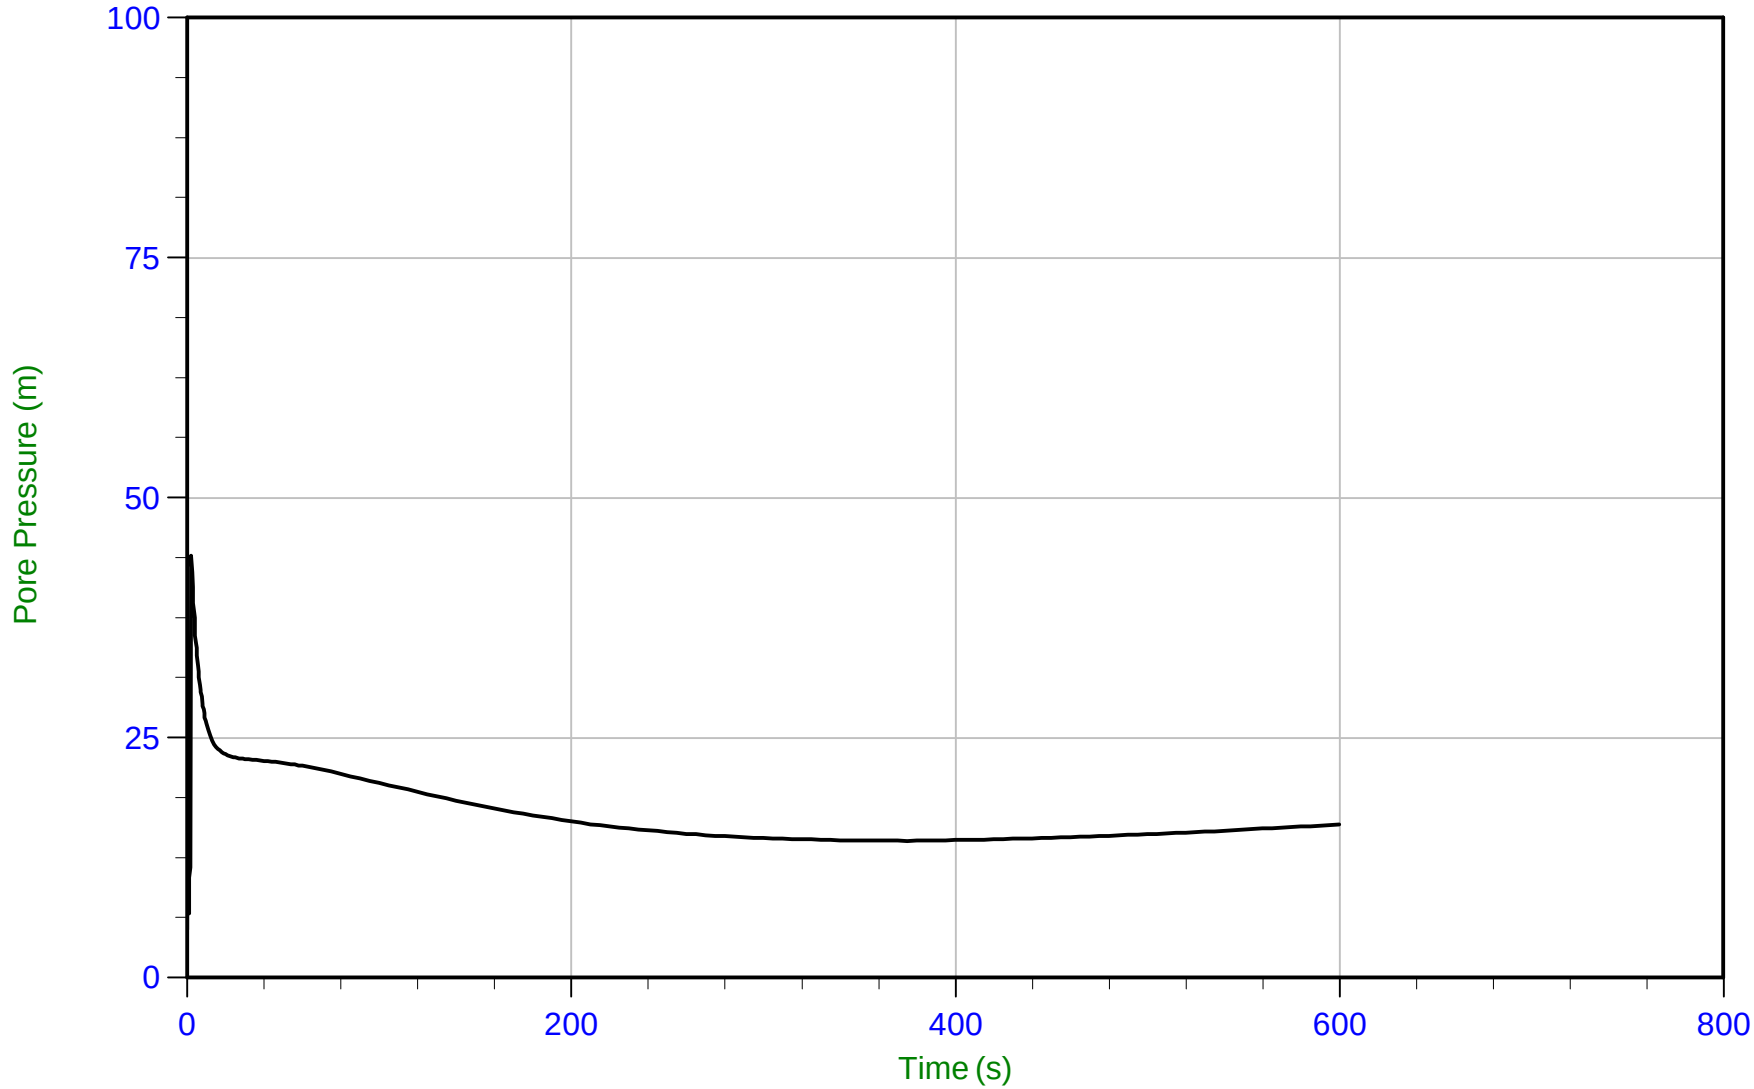

Trace Summary:

Filename: 22-02-23796_RP22-22CPT211.PPF
Depth: 4.725 m / 15.502 ft
Duration: 600.0 s


u Min: 5.0 m
u Max: 44.0 m
u Final: 16.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 17:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT212
Cone: 854:T1500F15U35 Area=15 cm²

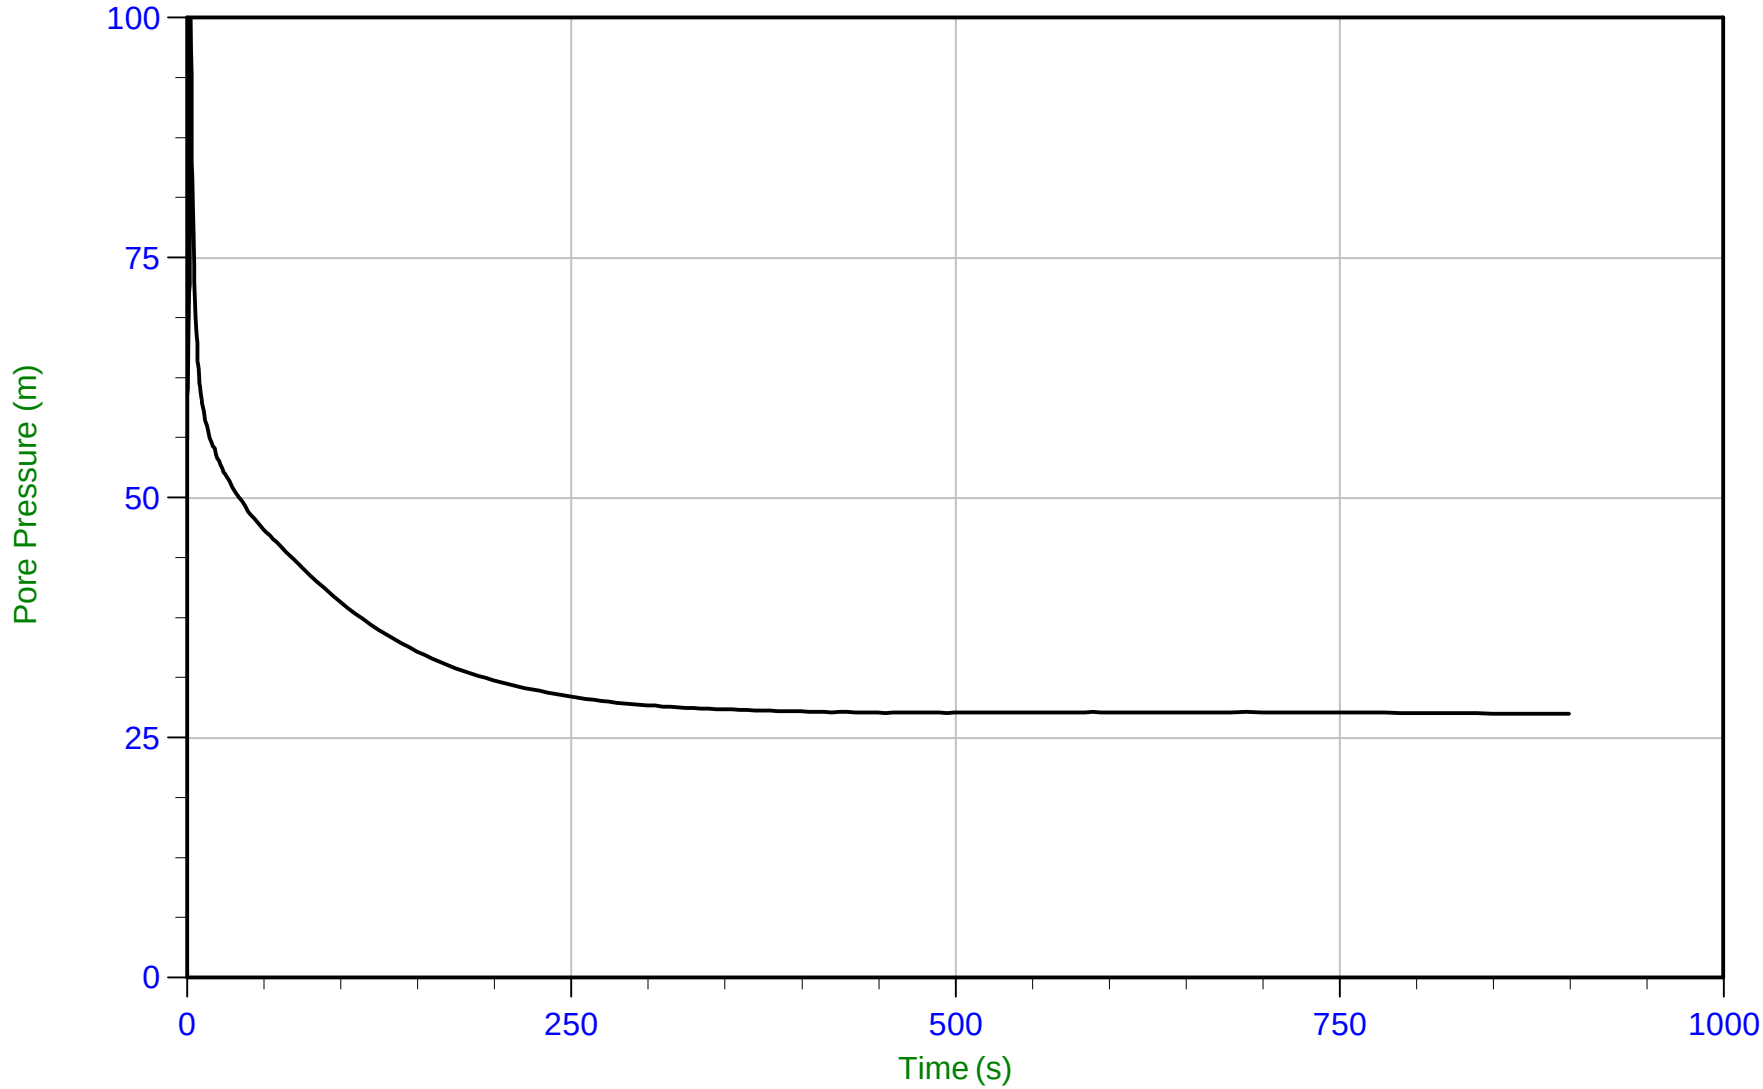

Trace Summary:

Filename: 22-02-23796_RP22-22CPT212.PPF
Depth: 3.900 m / 12.795 ft
Duration: 900.0 s

u Min: 27.5 m
u Max: 103.2 m
u Final: 27.5 m


WT: 2.600 m / 8.530 ft
Ueq: 1.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 17:46
Site: Brooks, Alberta

Sounding: RCPT22-22CPT212
Cone: 854:T1500F15U35 Area=15 cm²

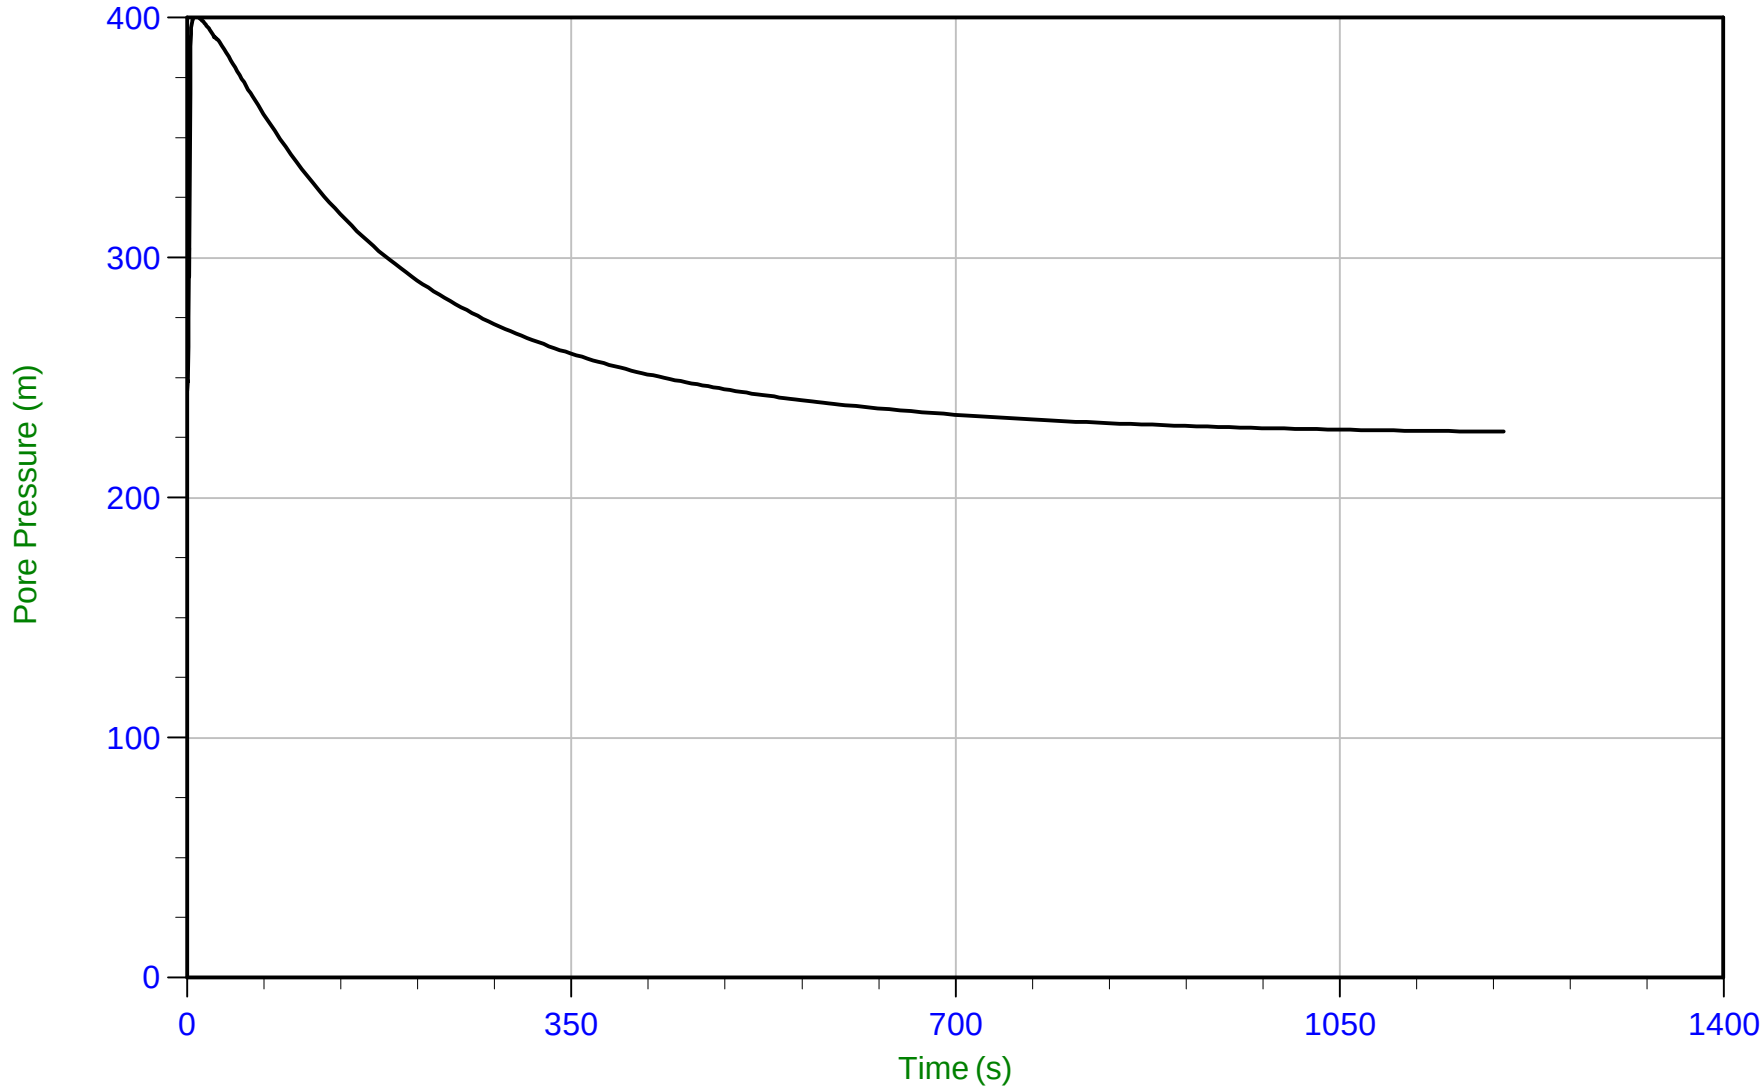

Trace Summary:

Filename: 22-02-23796_RP22-22CPT212.PPF
Depth: 7.675 m / 25.180 ft
Duration: 1200.0 s


u Min: 227.5 m
u Max: 400.6 m
u Final: 227.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 06:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT213
Cone: 854:T1500F15U35 Area=15 cm²

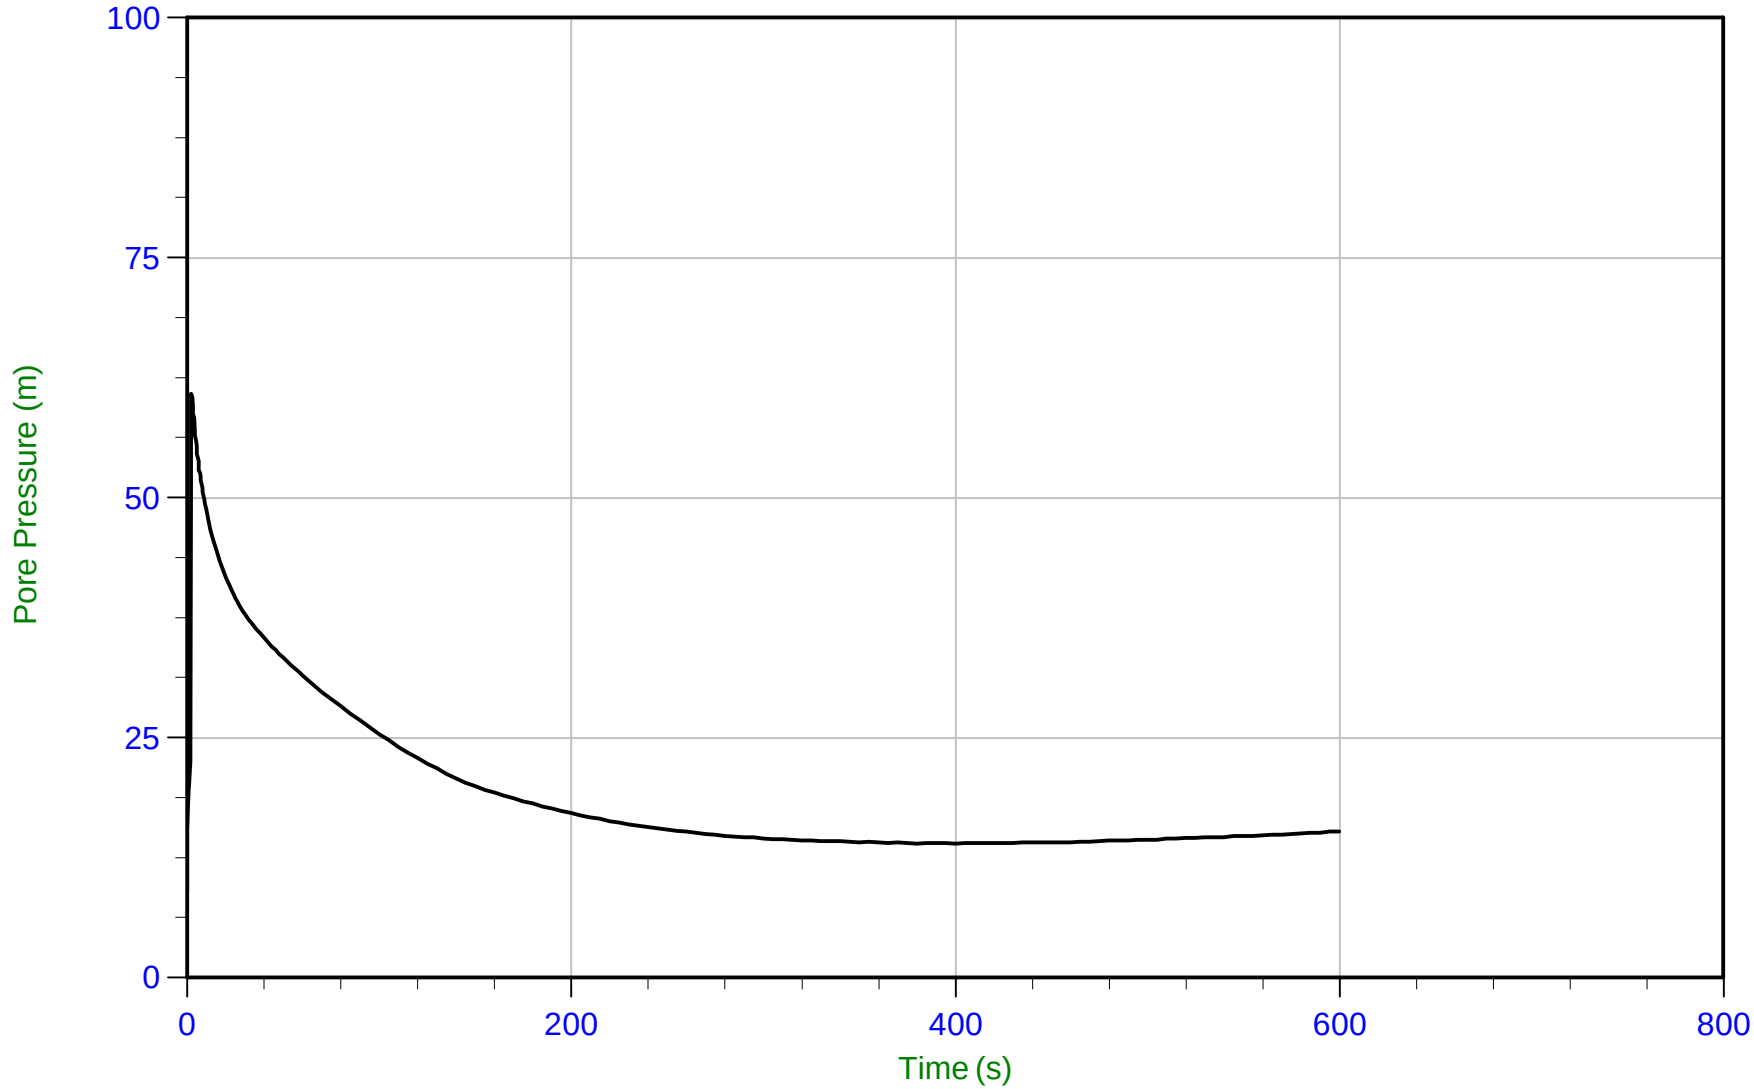

Trace Summary:

Filename: 22-02-23796_RP22-22CPT213.PPF
Depth: 3.850 m / 12.631 ft
Duration: 600.0 s


u Min: 8.9 m
u Max: 60.8 m
u Final: 15.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 06:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT213
Cone: 854:T1500F15U35 Area=15 cm²

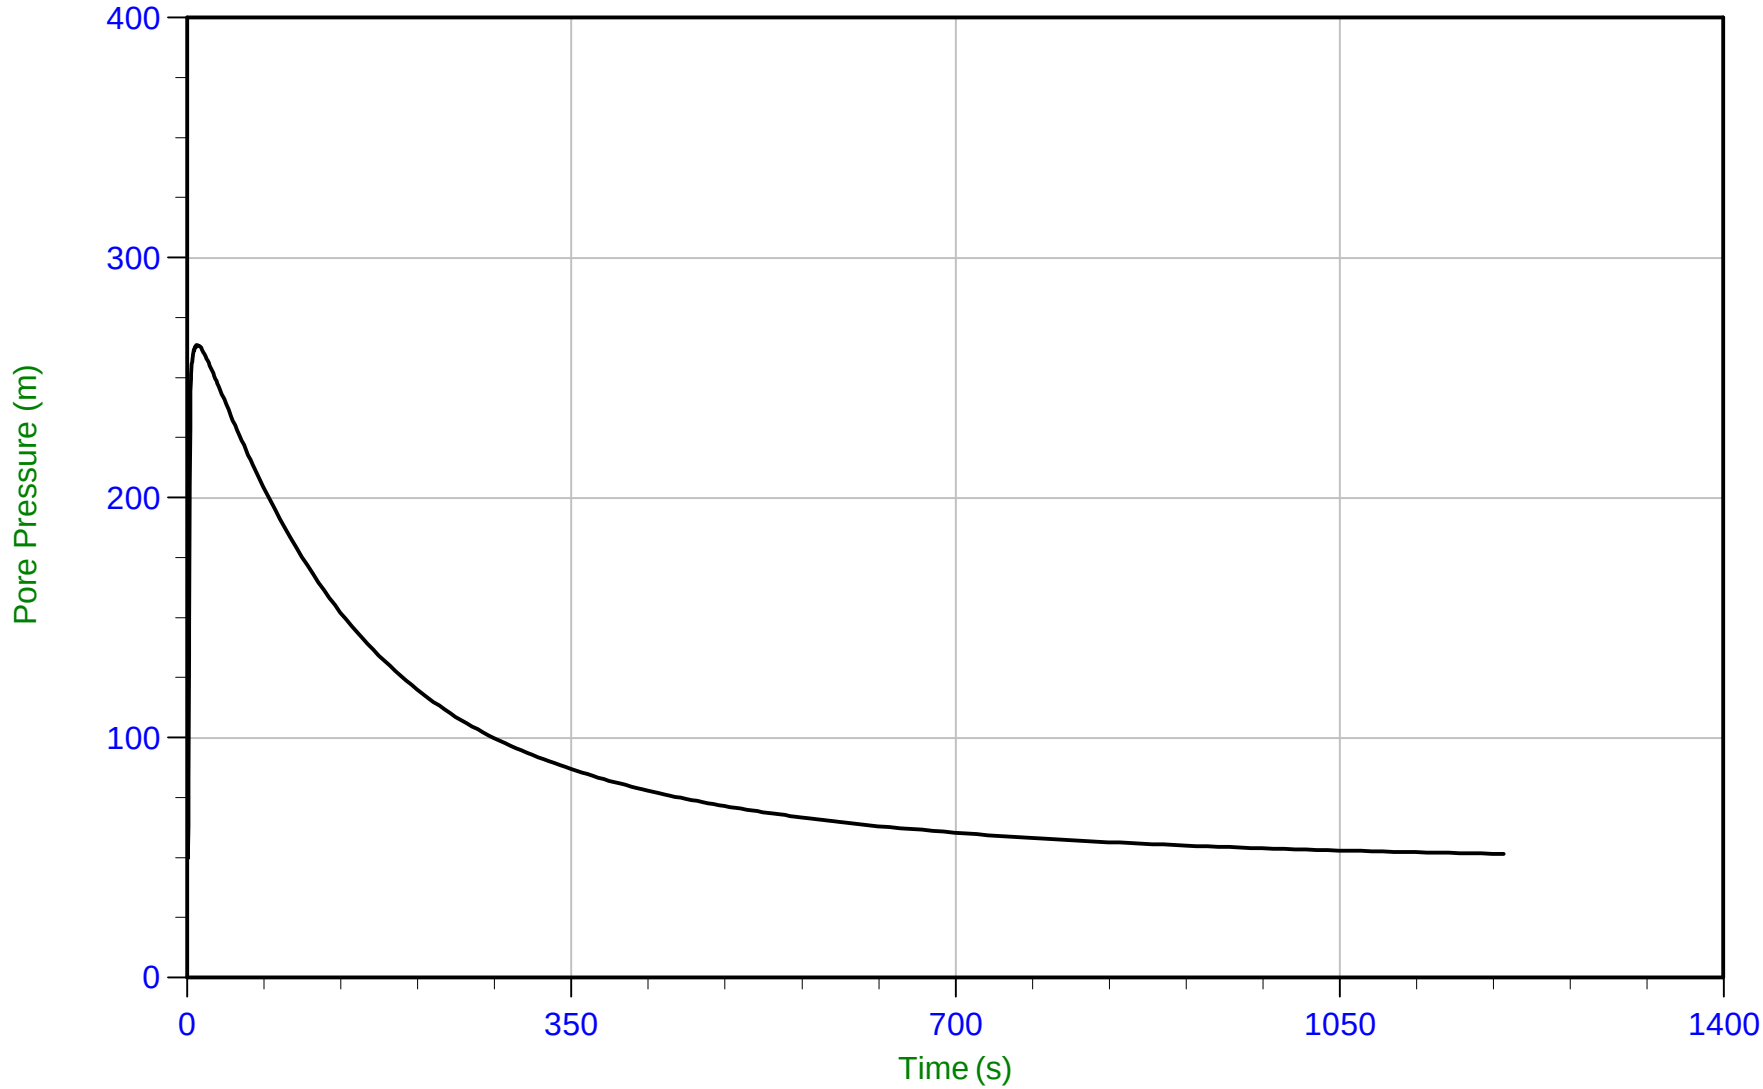

Trace Summary:

Filename: 22-02-23796_RP22-22CPT213.PPF
Depth: 7.975 m / 26.164 ft
Duration: 1200.0 s

u Min: 49.7 m
u Max: 263.7 m
u Final: 51.6 m

WT: 2.700 m / 8.858 ft
Ueq: 5.3 m
U(50): 134.47 m


T(50): 166.0 s
Ir: 100
Ch: 4.2 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 06:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT213
Cone: 854:T1500F15U35 Area=15 cm²

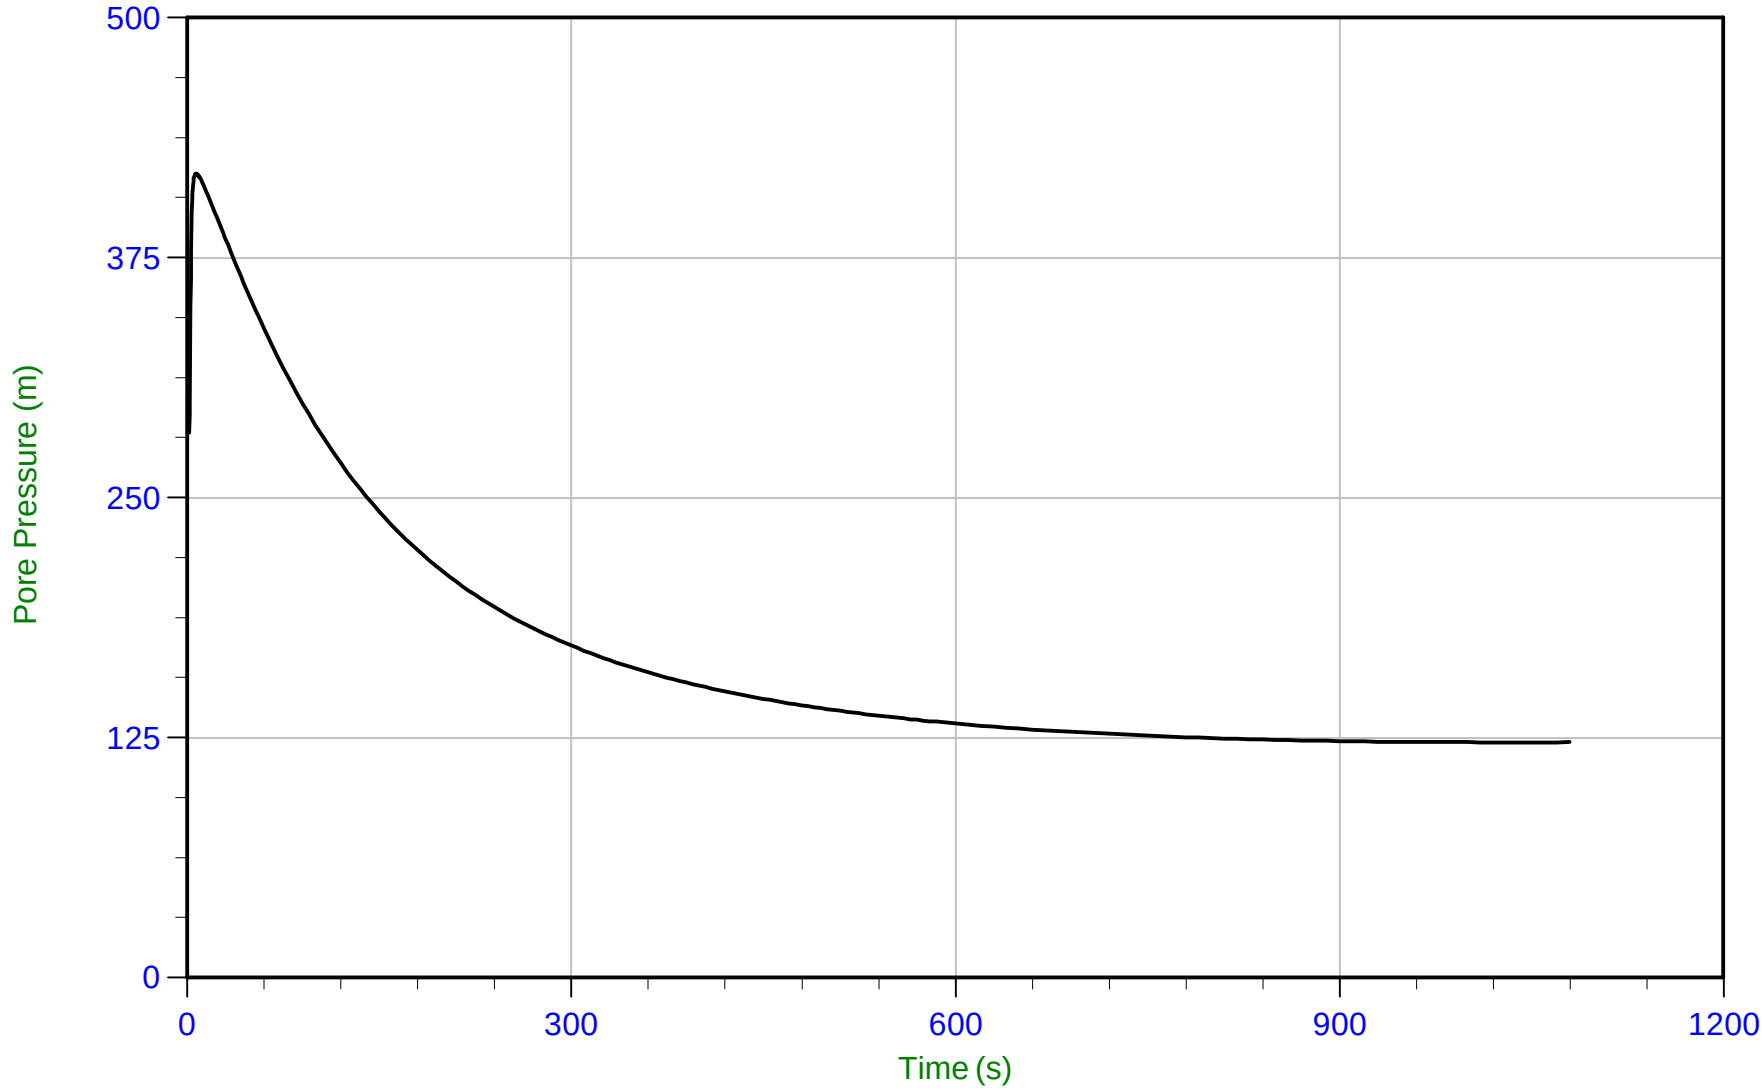

Trace Summary:

Filename: 22-02-23796_RP22-22CPT213.PPF
Depth: 12.025 m / 39.452 ft
Duration: 1080.0 s

u Min: 122.6 m
u Max: 418.8 m
u Final: 122.7 m


WT: 2.700 m / 8.858 ft
Ueq: 9.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 08:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT214
Cone: 854:T1500F15U35 Area=15 cm²

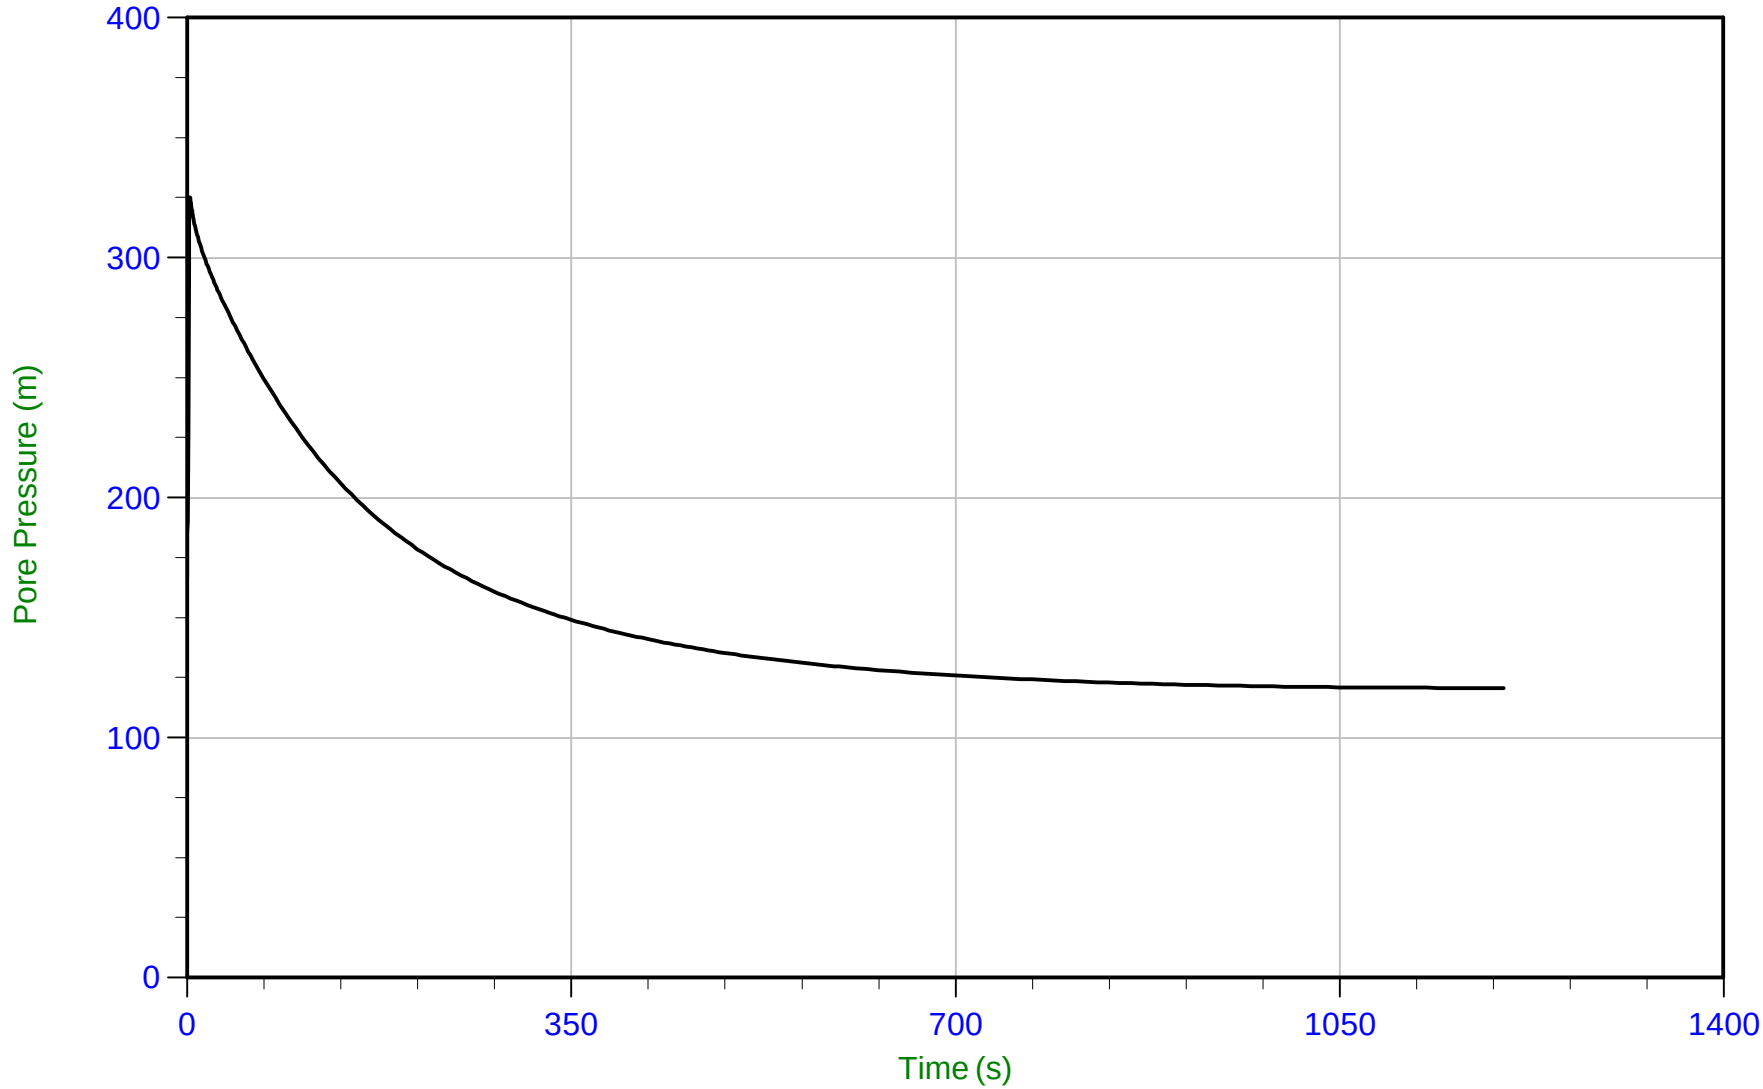

Trace Summary:

Filename: 22-02-23796_RP22-22CPT214.PPF
Depth: 6.875 m / 22.556 ft
Duration: 1200.0 s

u Min: 120.7 m
u Max: 325.1 m
u Final: 120.7 m


WT: 4.000 m / 13.123 ft
Ueq: 2.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 11:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT217
Cone: 854:T1500F15U35 Area=15 cm²

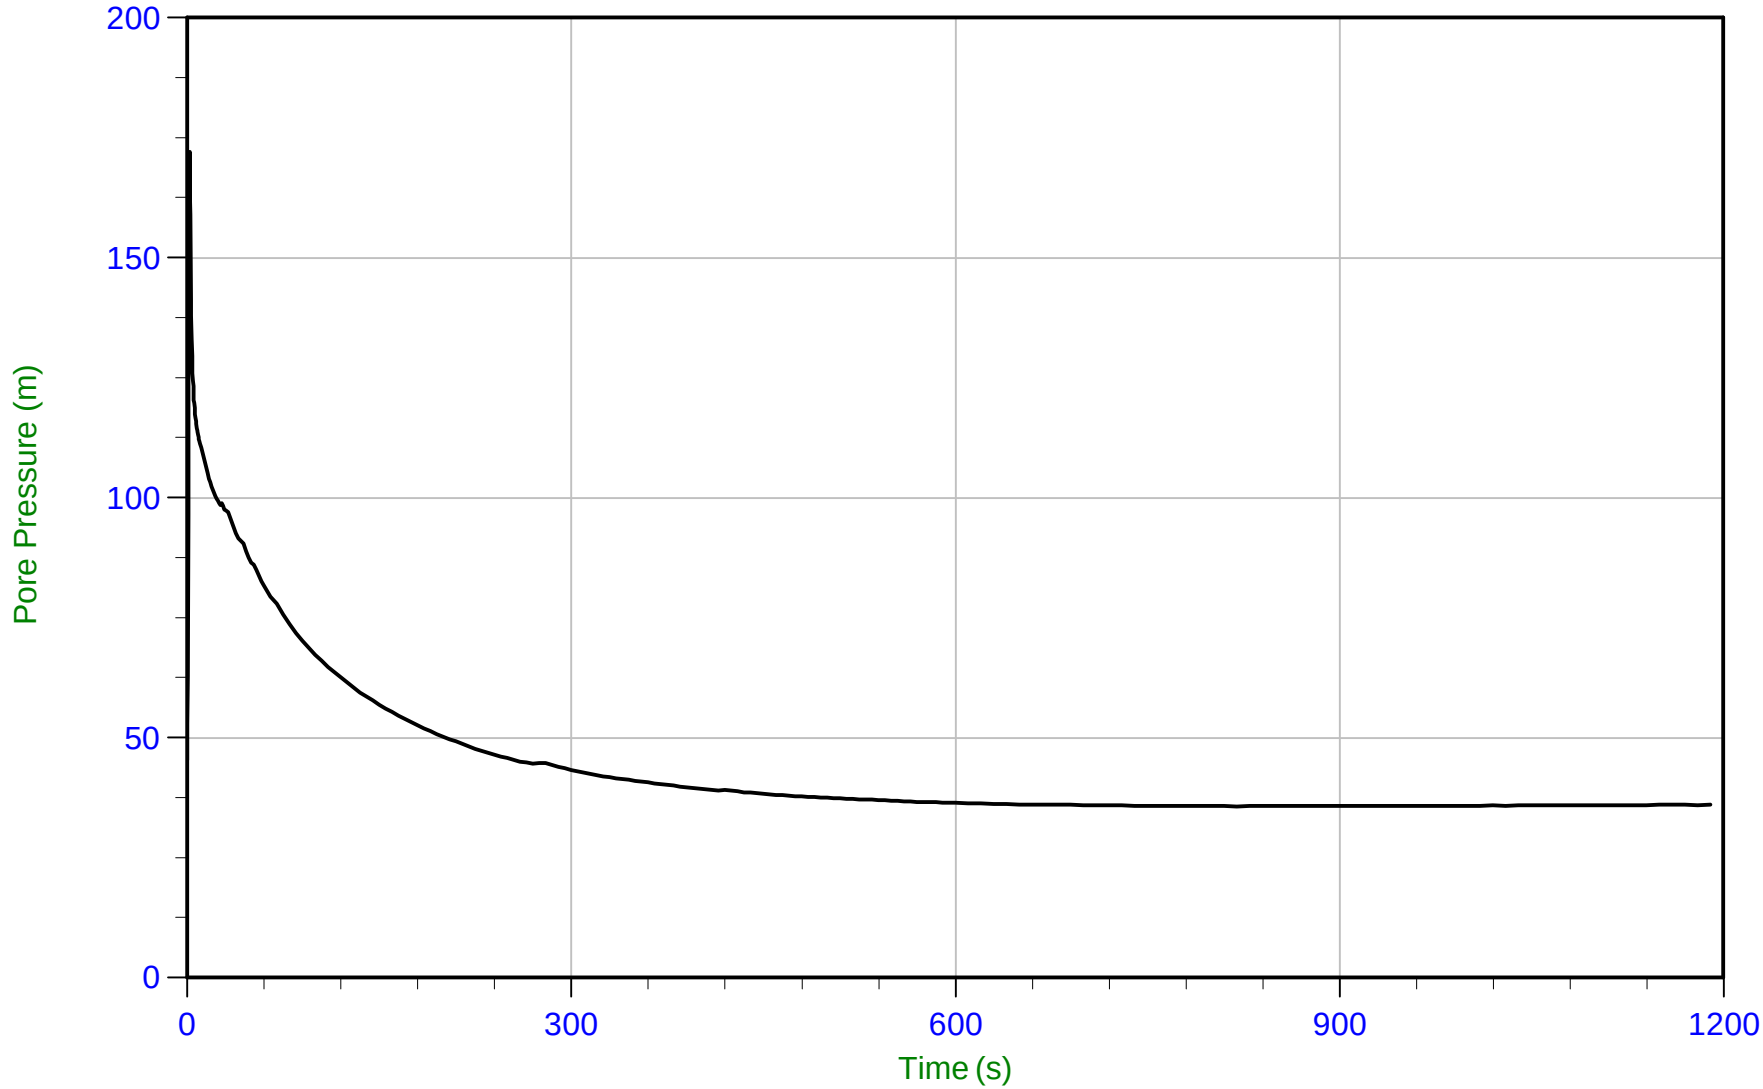

Trace Summary:

Filename: 22-02-23796_RP22-22CPT217.PPF
Depth: 4.850 m / 15.912 ft
Duration: 1190.0 s


u Min: 35.7 m
u Max: 172.0 m
u Final: 36.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 11:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT217
Cone: 854:T1500F15U35 Area=15 cm²

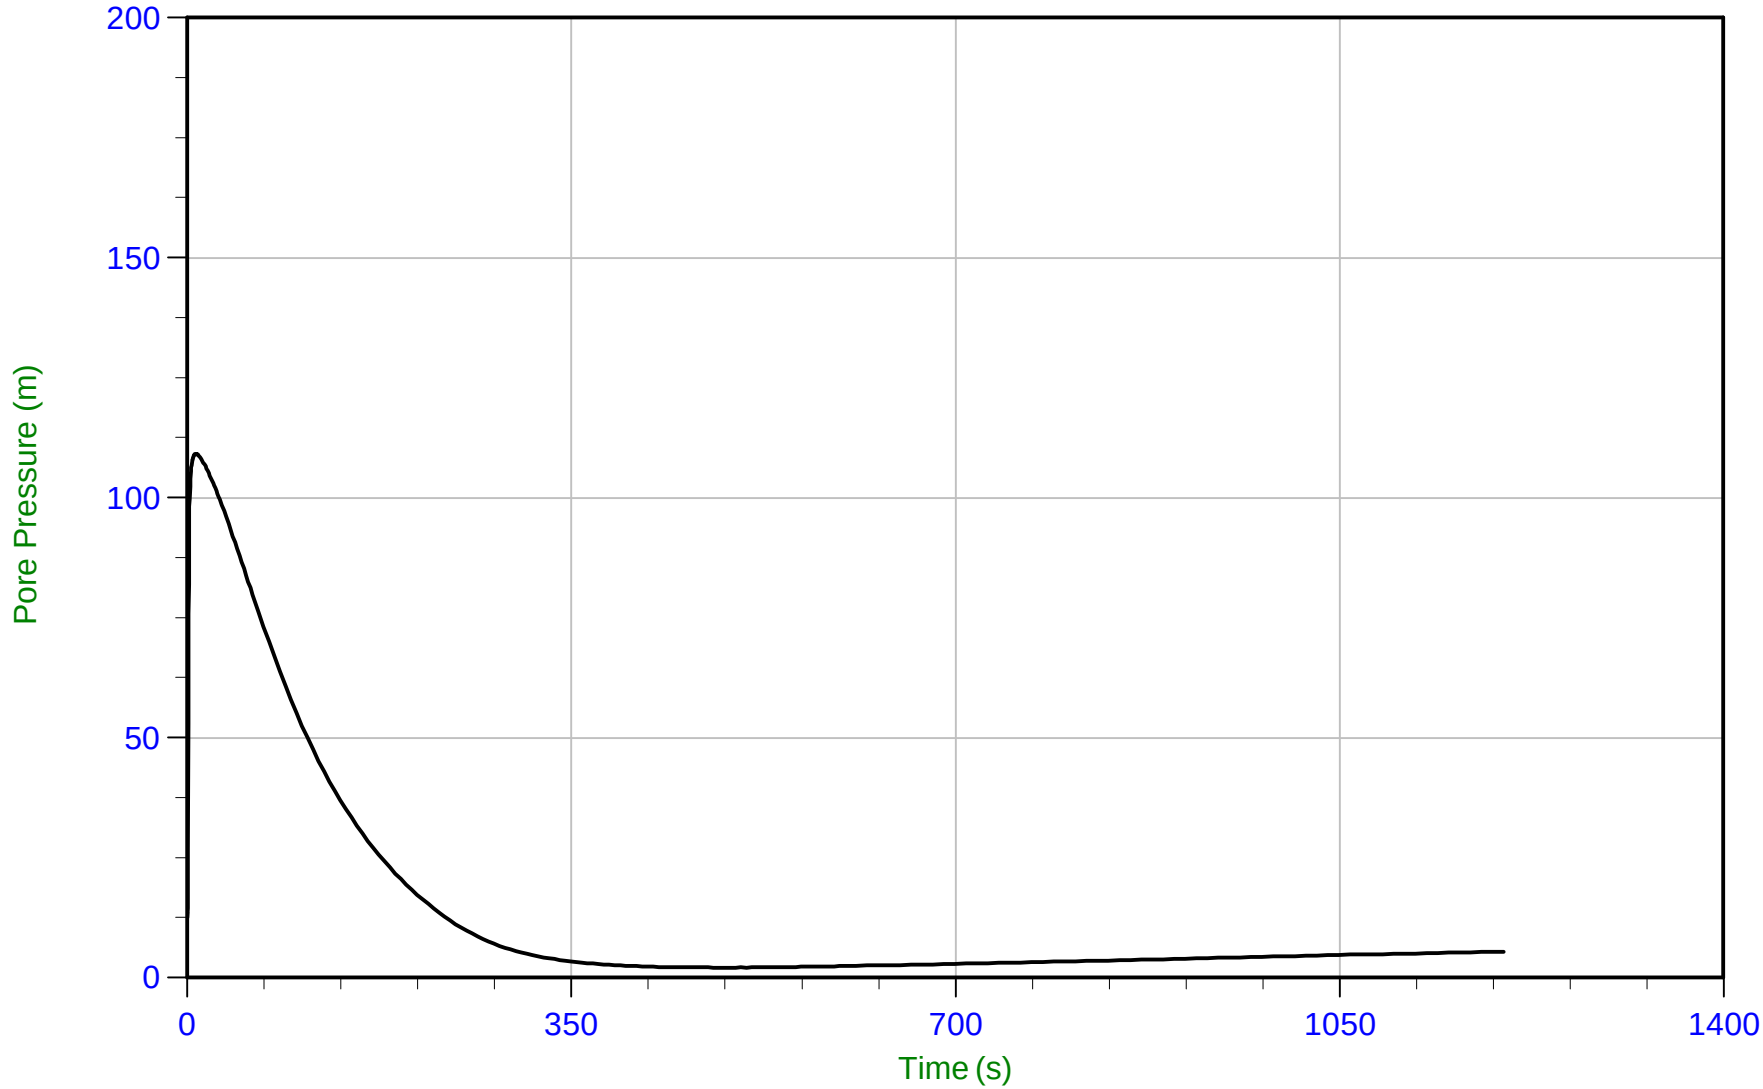

Trace Summary:

Filename: 22-02-23796_RP22-22CPT217.PPF
Depth: 8.850 m / 29.035 ft
Duration: 1200.0 s


u Min: 2.1 m
u Max: 109.1 m
u Final: 5.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT218
Cone: 854:T1500F15U35 Area=15 cm²

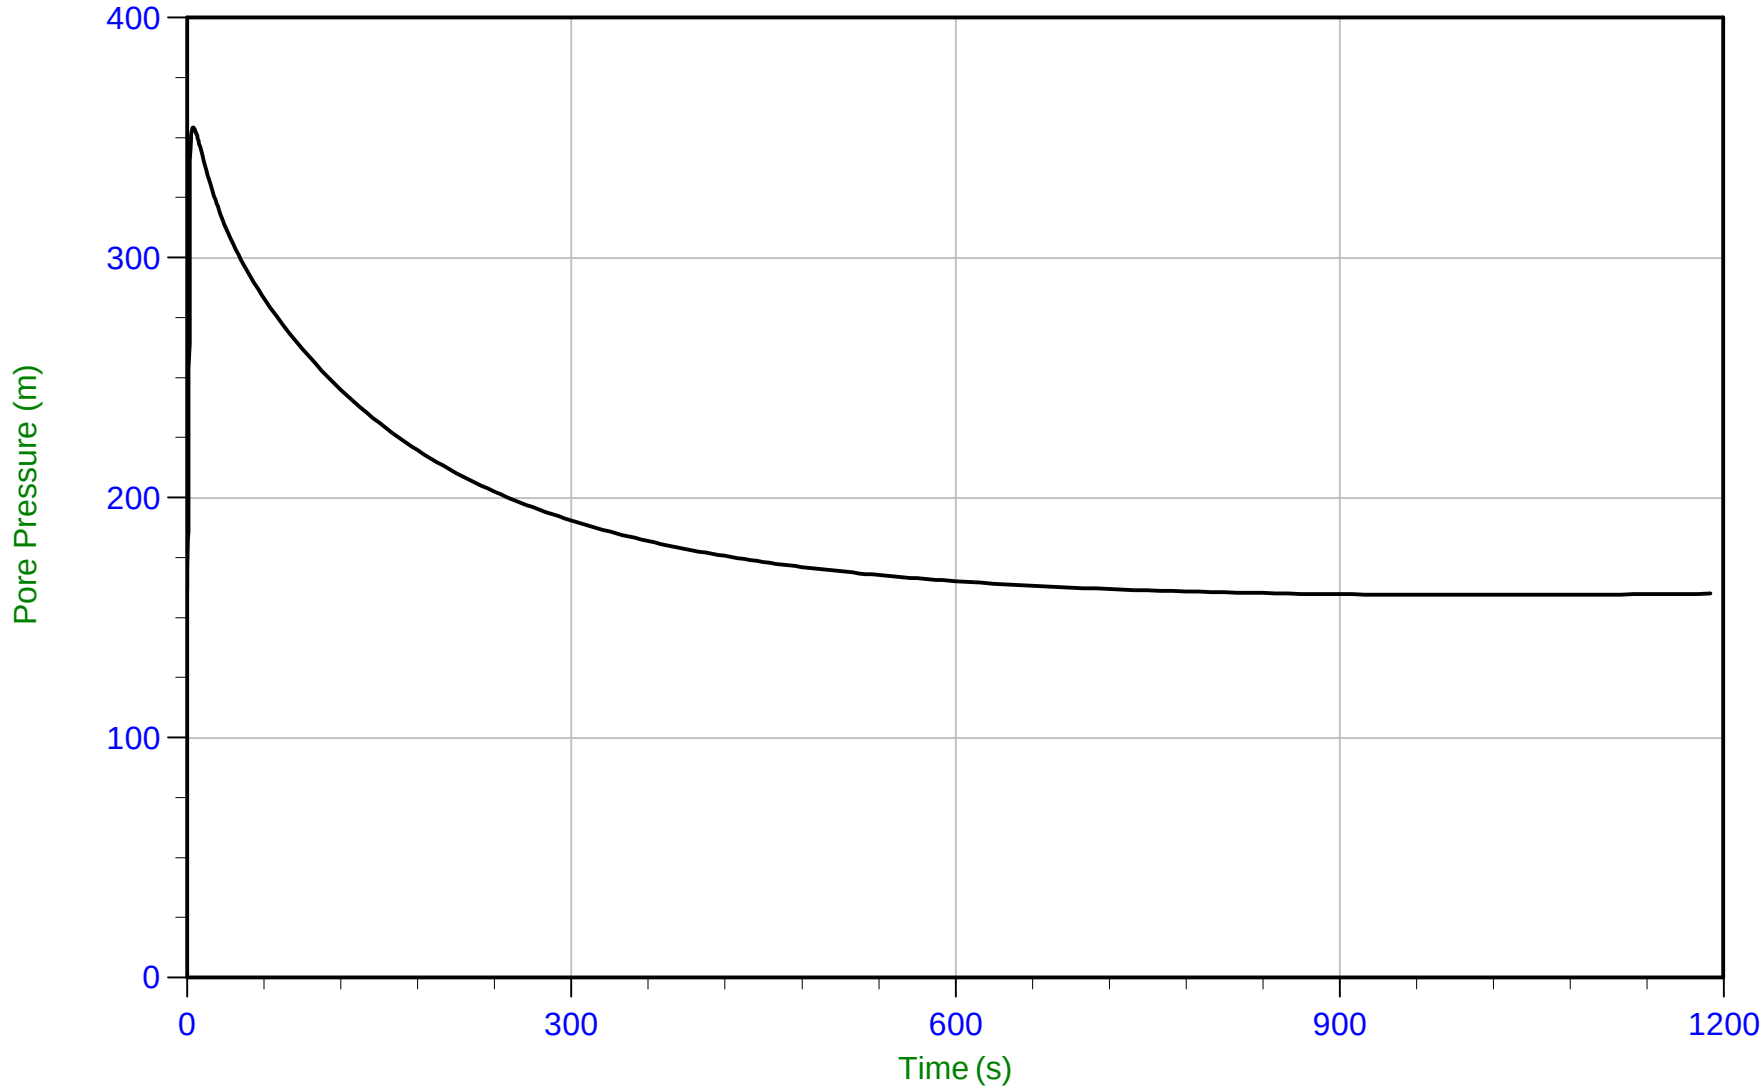

Trace Summary:

Filename: 22-02-23796_RP22-22CPT218.PPF
Depth: 7.025 m / 23.048 ft
Duration: 1190.0 s

u Min: 159.5 m
u Max: 354.4 m
u Final: 160.0 m


WT: 3.800 m / 12.467 ft
Ueq: 3.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT218
Cone: 854:T1500F15U35 Area=15 cm²

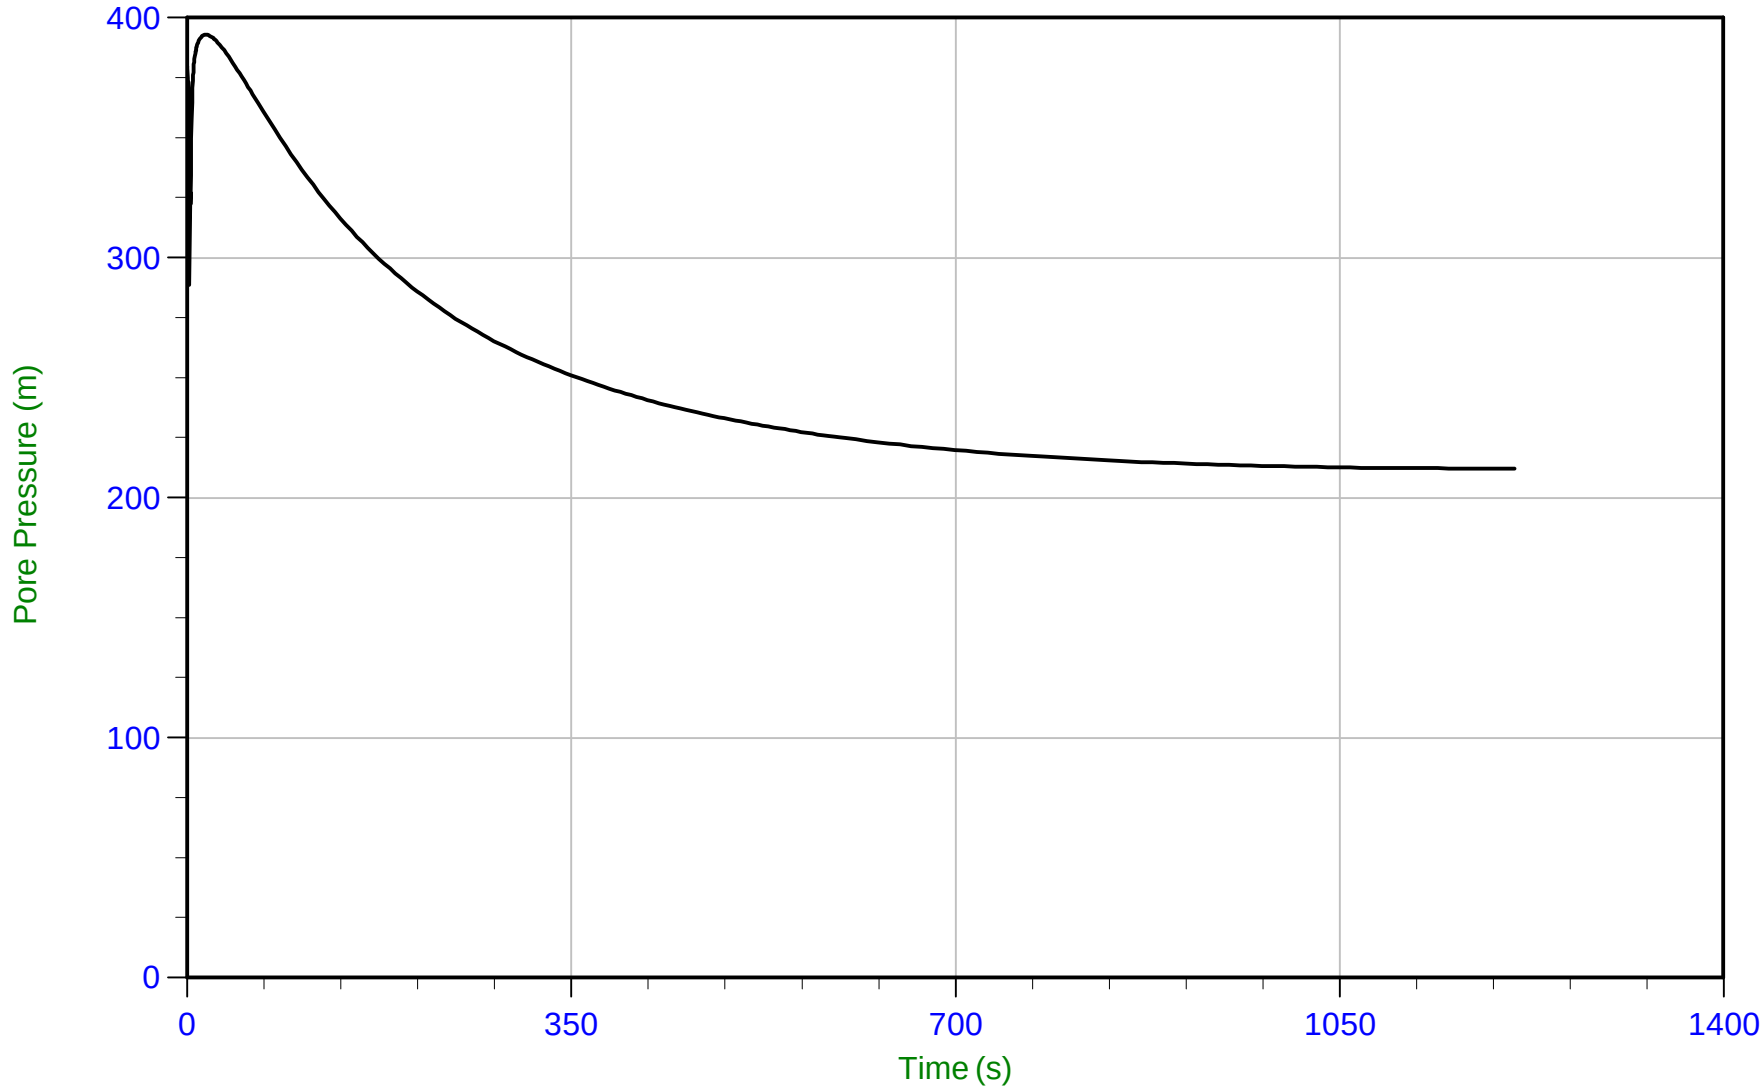

Trace Summary:

Filename: 22-02-23796_RP22-22CPT218.PPF
Depth: 9.575 m / 31.414 ft
Duration: 1210.0 s

u Min: 212.2 m
u Max: 392.9 m
u Final: 212.2 m


WT: 3.800 m / 12.467 ft
Ueq: 5.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 14:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT219
Cone: 854:T1500F15U35 Area=15 cm²

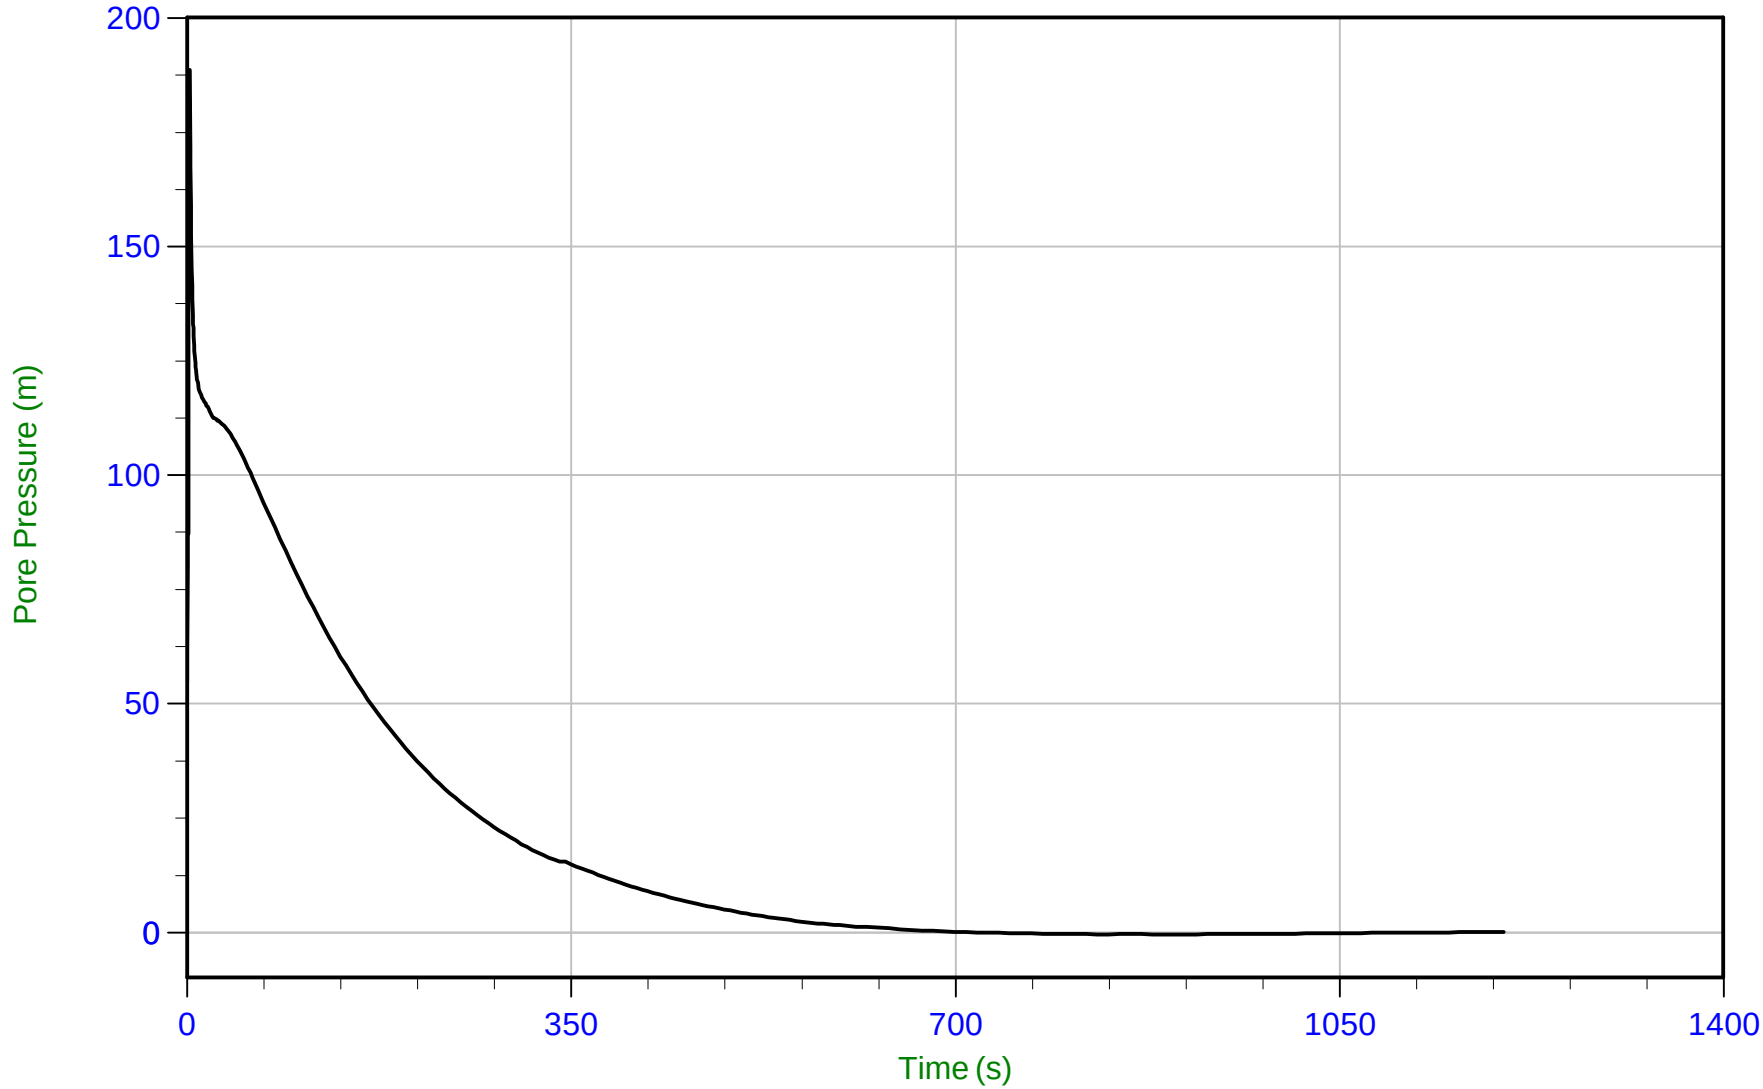

Trace Summary:

Filename: 22-02-23796_RP22-22CPT219.PPF
Depth: 6.025 m / 19.767 ft
Duration: 1200.0 s


u Min: -0.5 m
u Max: 188.6 m
u Final: 0.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 14:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT219
Cone: 854:T1500F15U35 Area=15 cm²

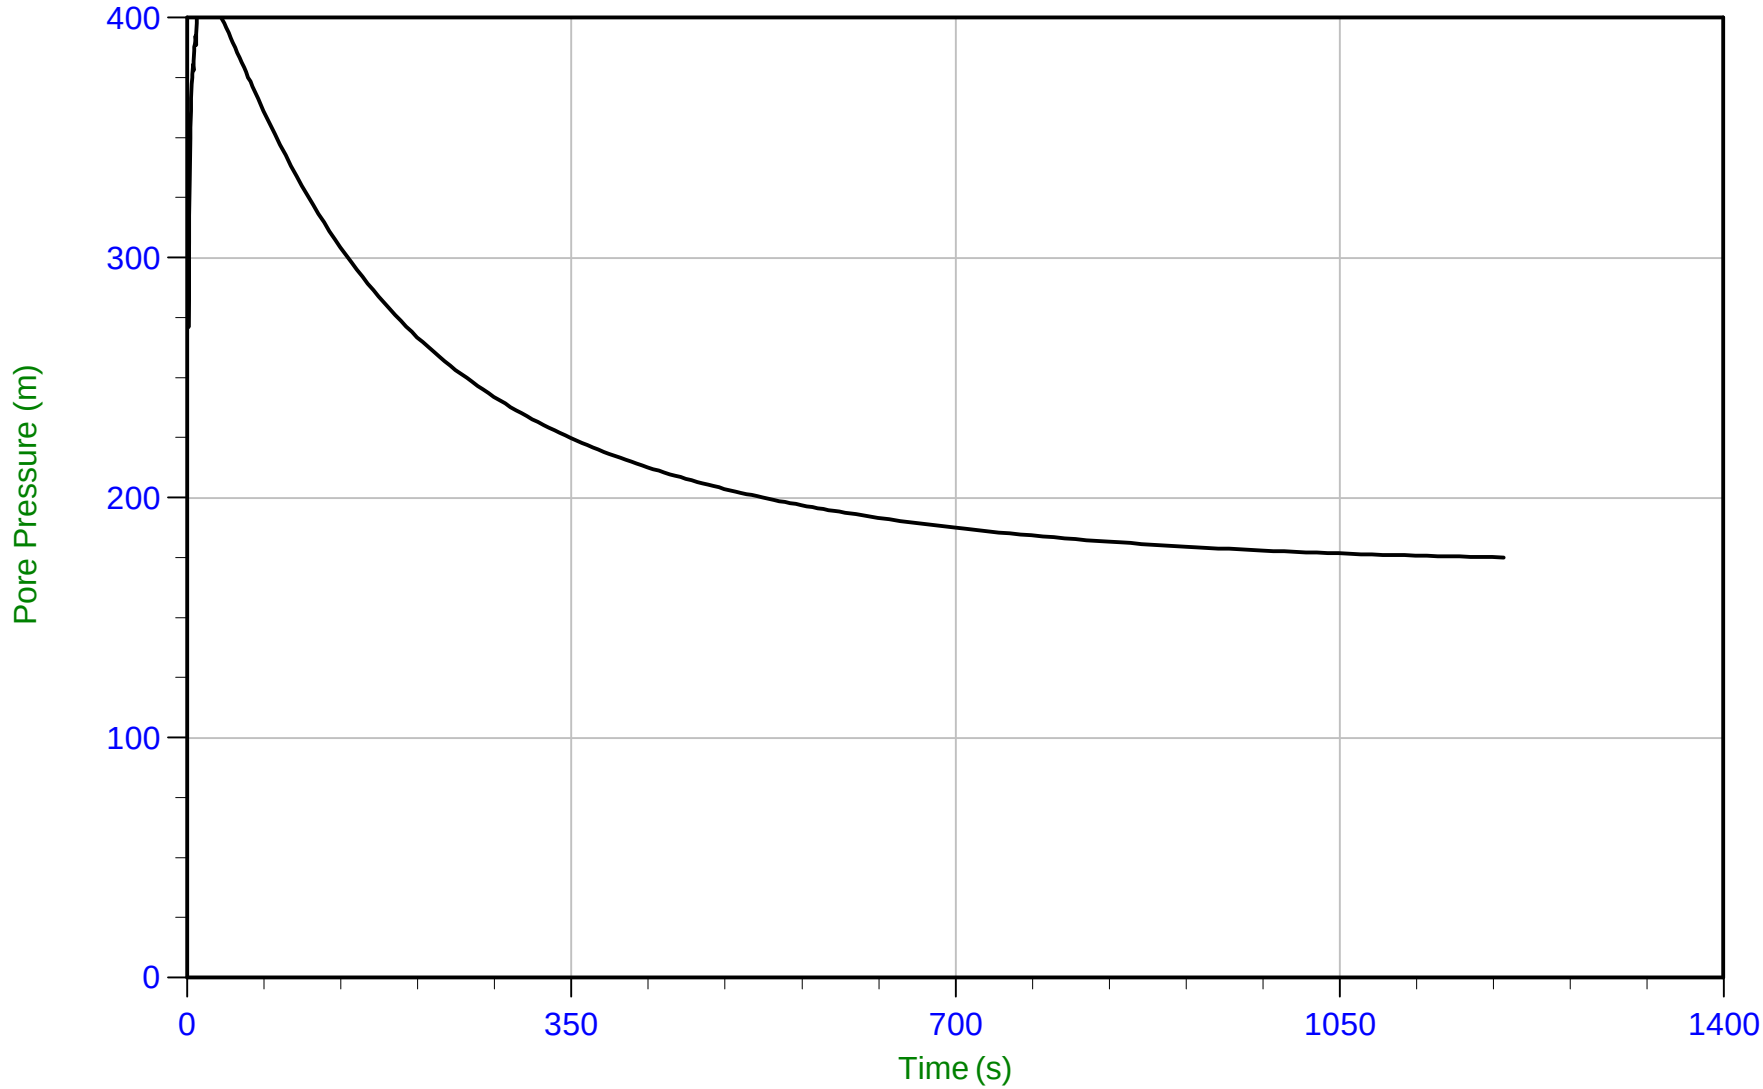

Trace Summary:

Filename: 22-02-23796_RP22-22CPT219.PPF
Depth: 11.475 m / 37.647 ft
Duration: 1200.0 s

u Min: 175.1 m
u Max: 410.4 m
u Final: 175.1 m

WT: 2.600 m / 8.530 ft
Ueq: 8.9 m
U(50): 209.64 m


T(50): 426.6 s
Ir: 100
Ch: 1.6 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 16:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT220B
Cone: 854:T1500F15U35 Area=15 cm²

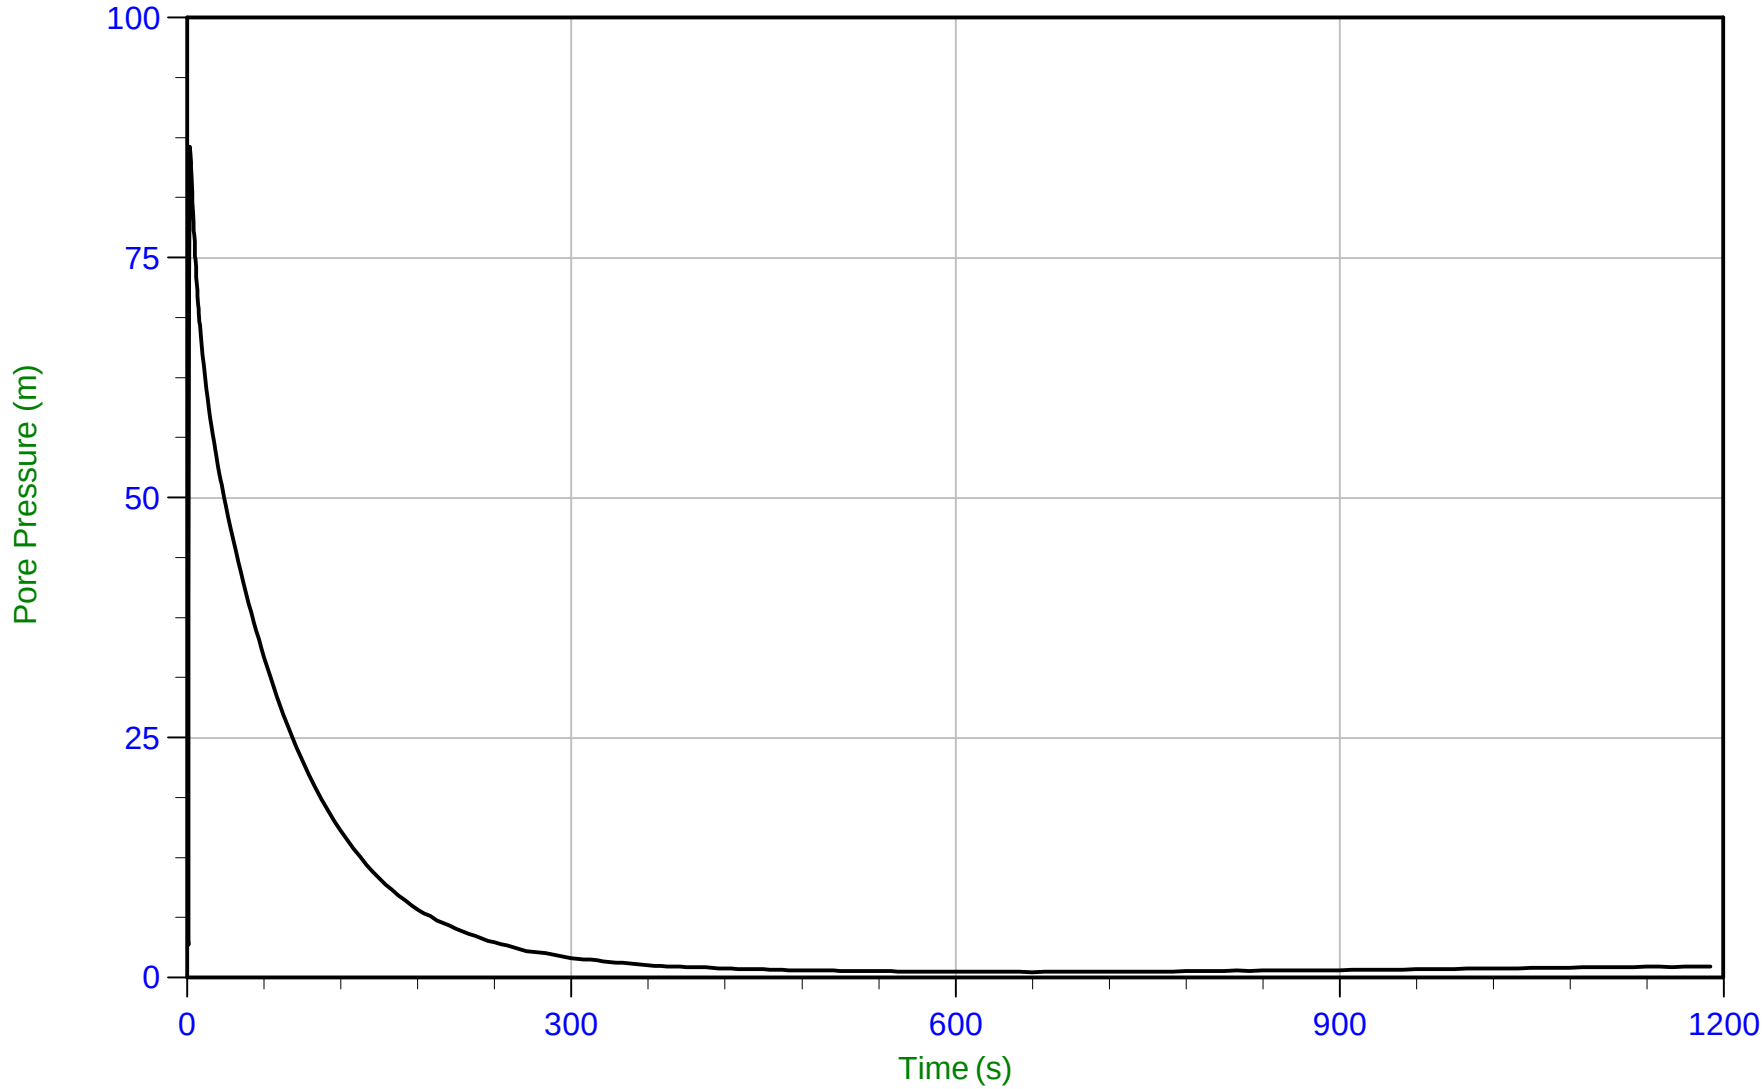

Trace Summary:

Filename: 22-02-23796_RP22-22CPT220B.PPF
Depth: 6.900 m / 22.638 ft
Duration: 1190.0 s


u Min: 0.6 m
u Max: 86.5 m
u Final: 1.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 17:44
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT221
Cone: 854:T1500F15U35 Area=15 cm²

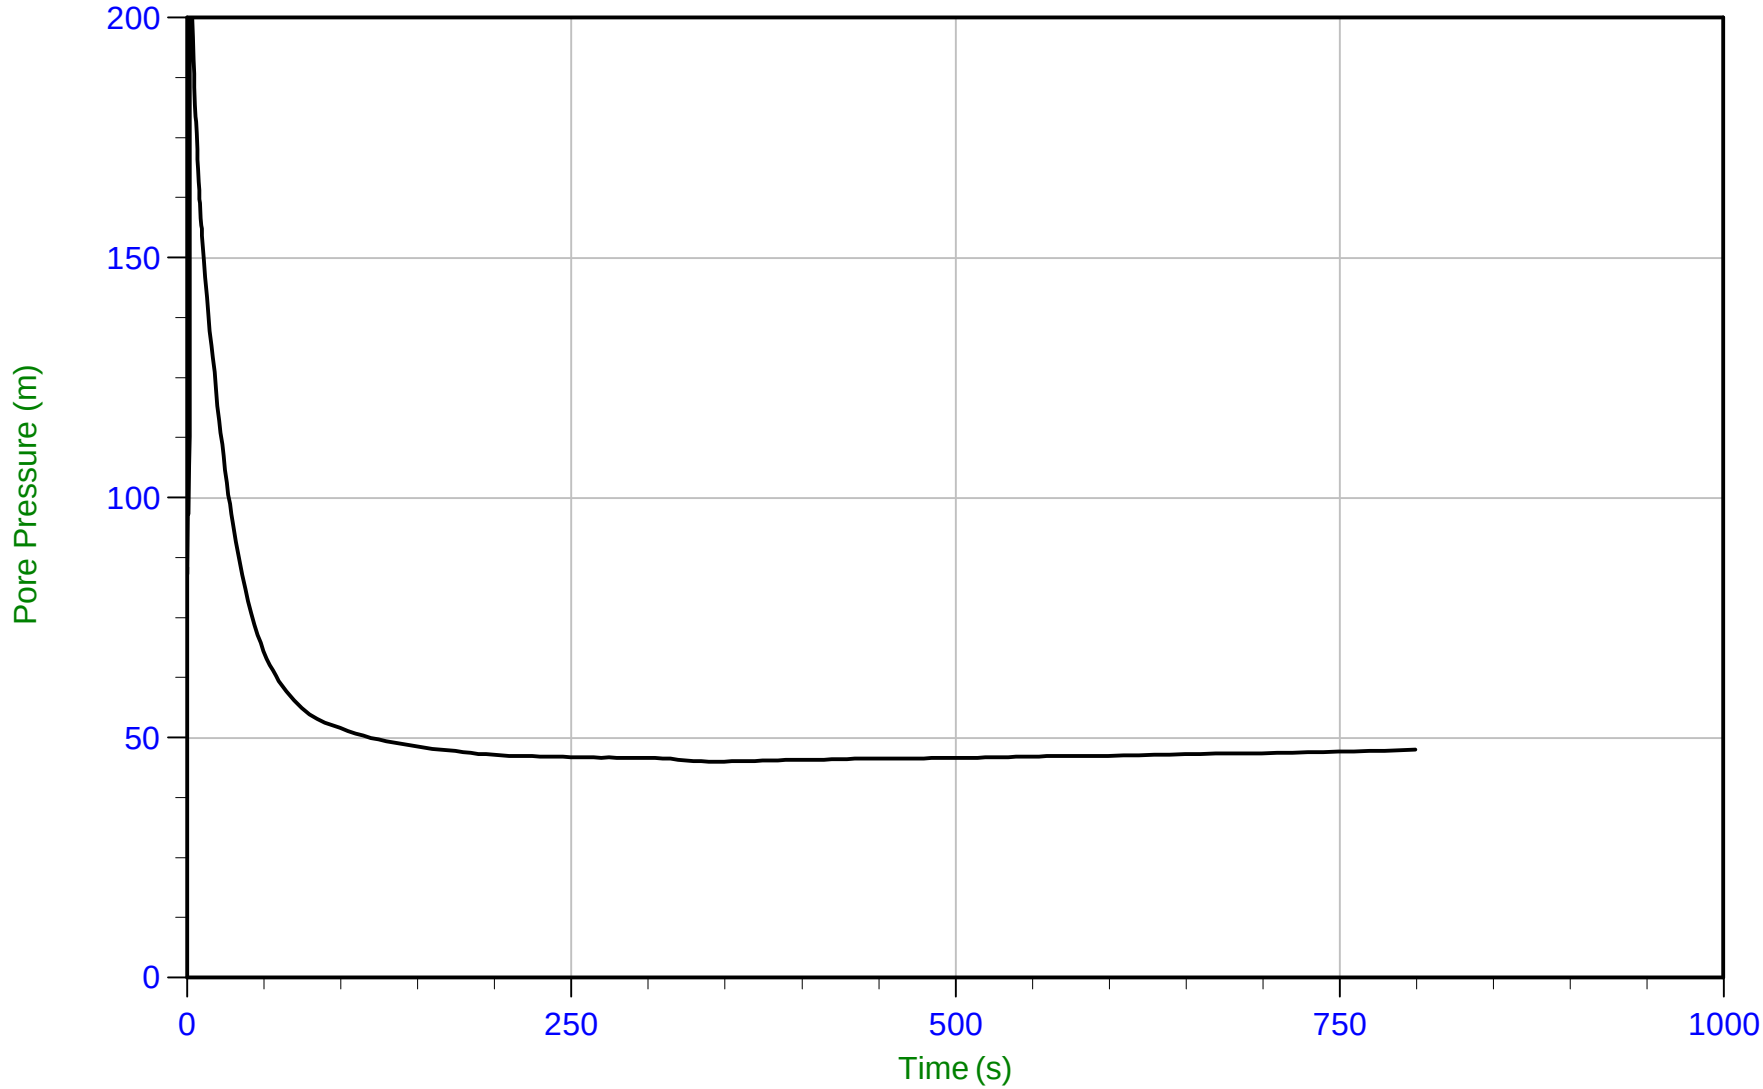

Trace Summary:

Filename: 22-02-23796_RS22-22CPT221.PPF
Depth: 3.750 m / 12.303 ft
Duration: 800.0 s


u Min: 45.0 m
u Max: 209.4 m
u Final: 47.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/30/2022 17:44
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT221
Cone: 854:T1500F15U35 Area=15 cm²

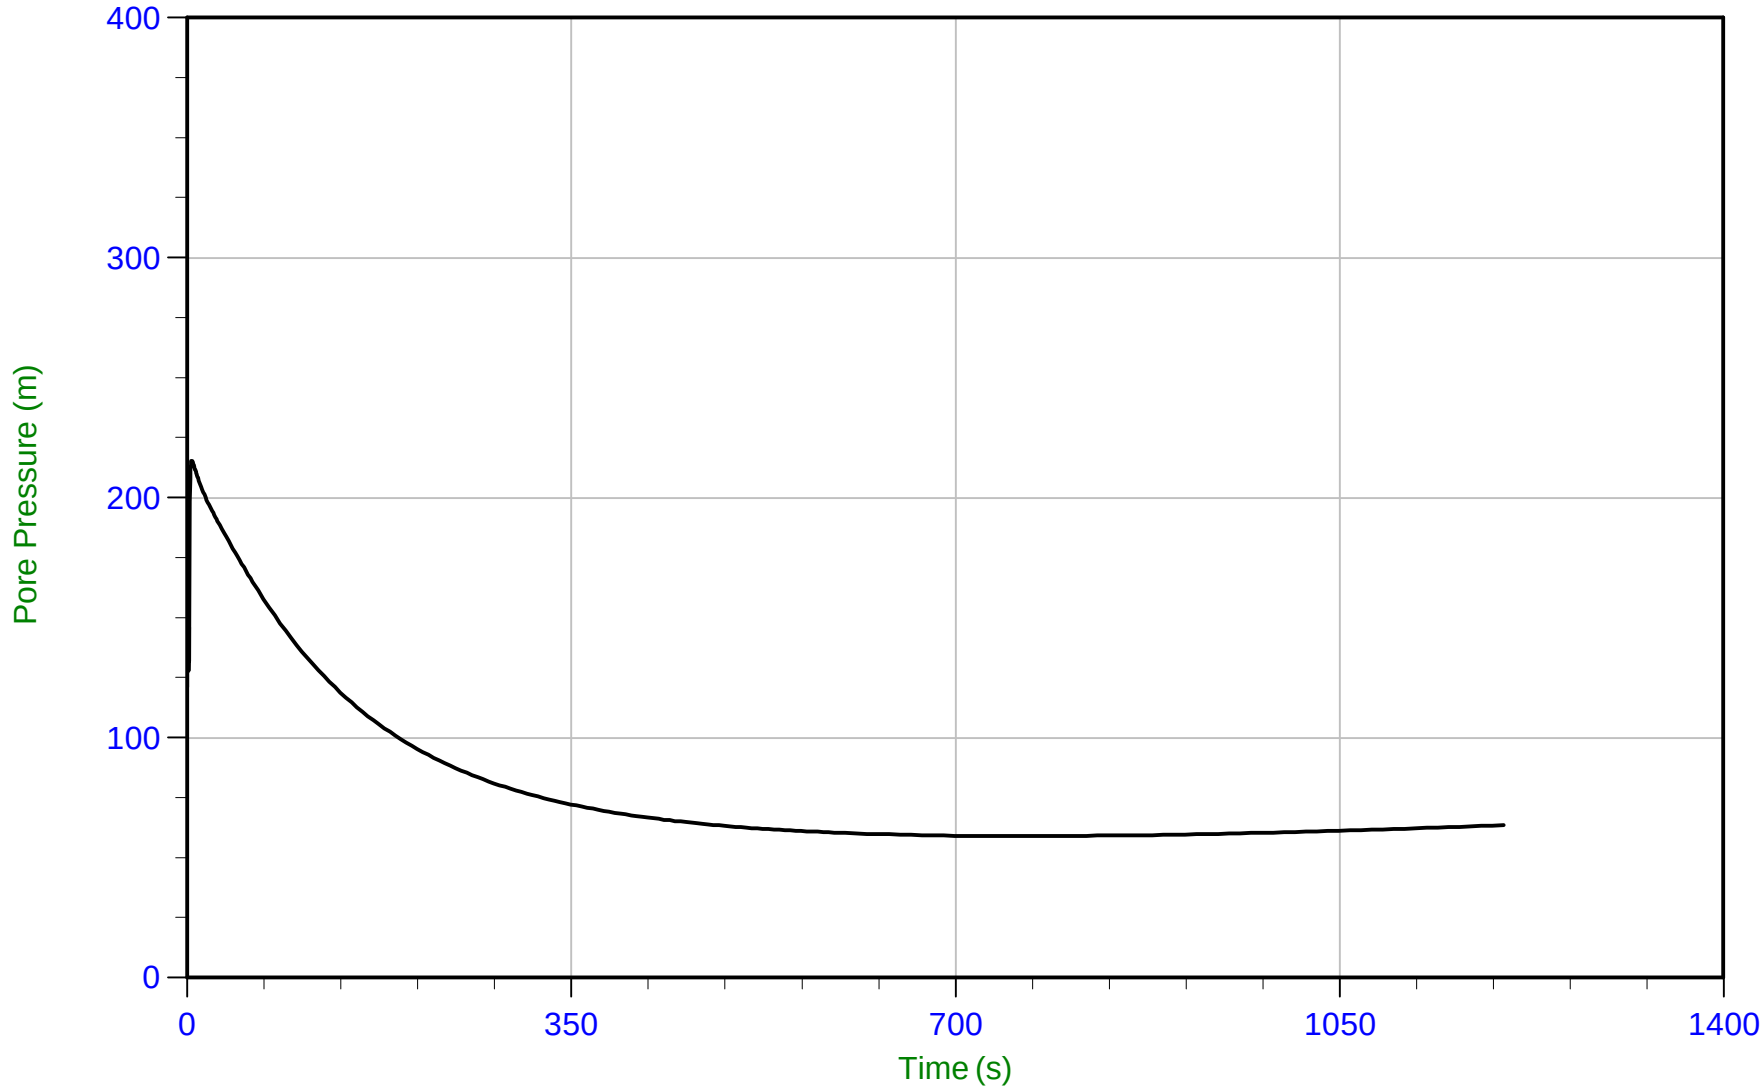

Trace Summary:

Filename: 22-02-23796_RS22-22CPT221.PPF
Depth: 7.725 m / 25.344 ft
Duration: 1200.0 s


u Min: 59.1 m
u Max: 215.4 m
u Final: 63.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 06:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT222
Cone: 854:T1500F15U35 Area=15 cm²

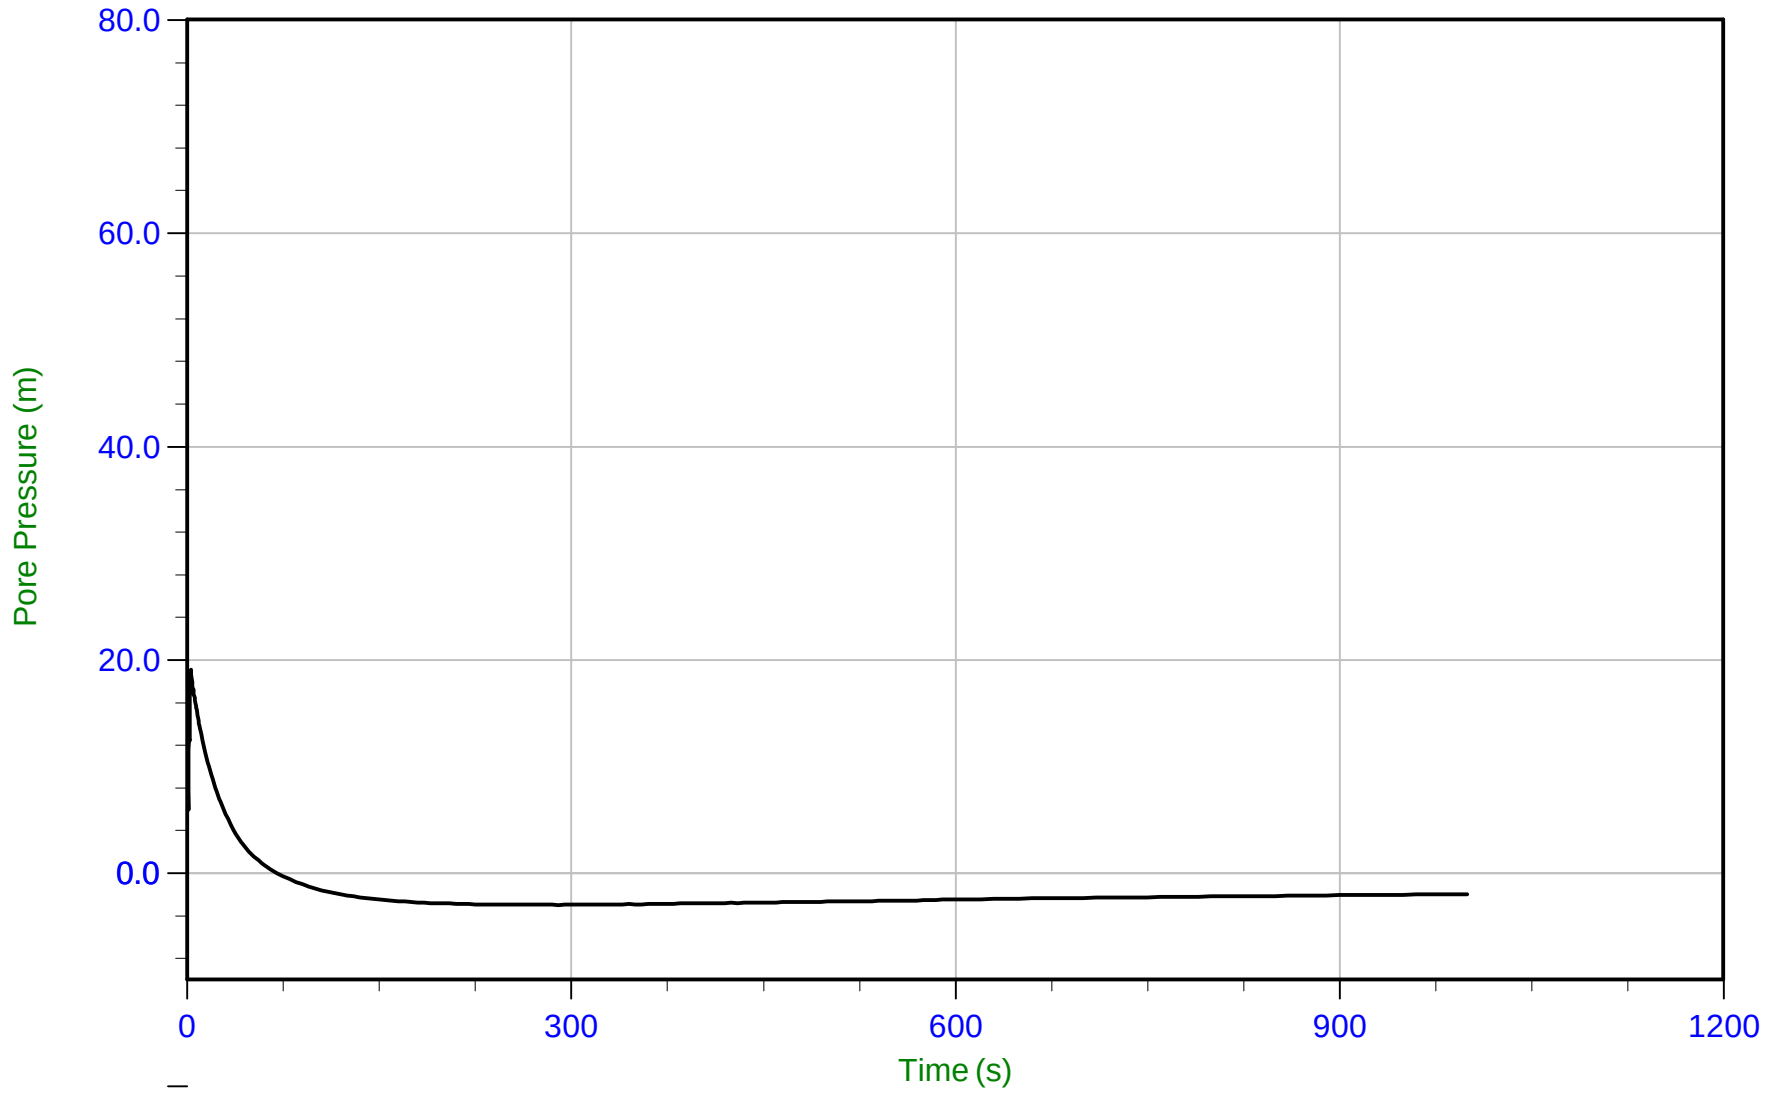

Trace Summary:

Filename: 22-02-23796_RP22-22CPT222.PPF
Depth: 8.550 m / 28.051 ft
Duration: 1000.0 s


u Min: -3.0 m
u Max: 19.1 m
u Final: -2.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 07:33
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT223
Cone: 854:T1500F15U35 Area=15 cm²

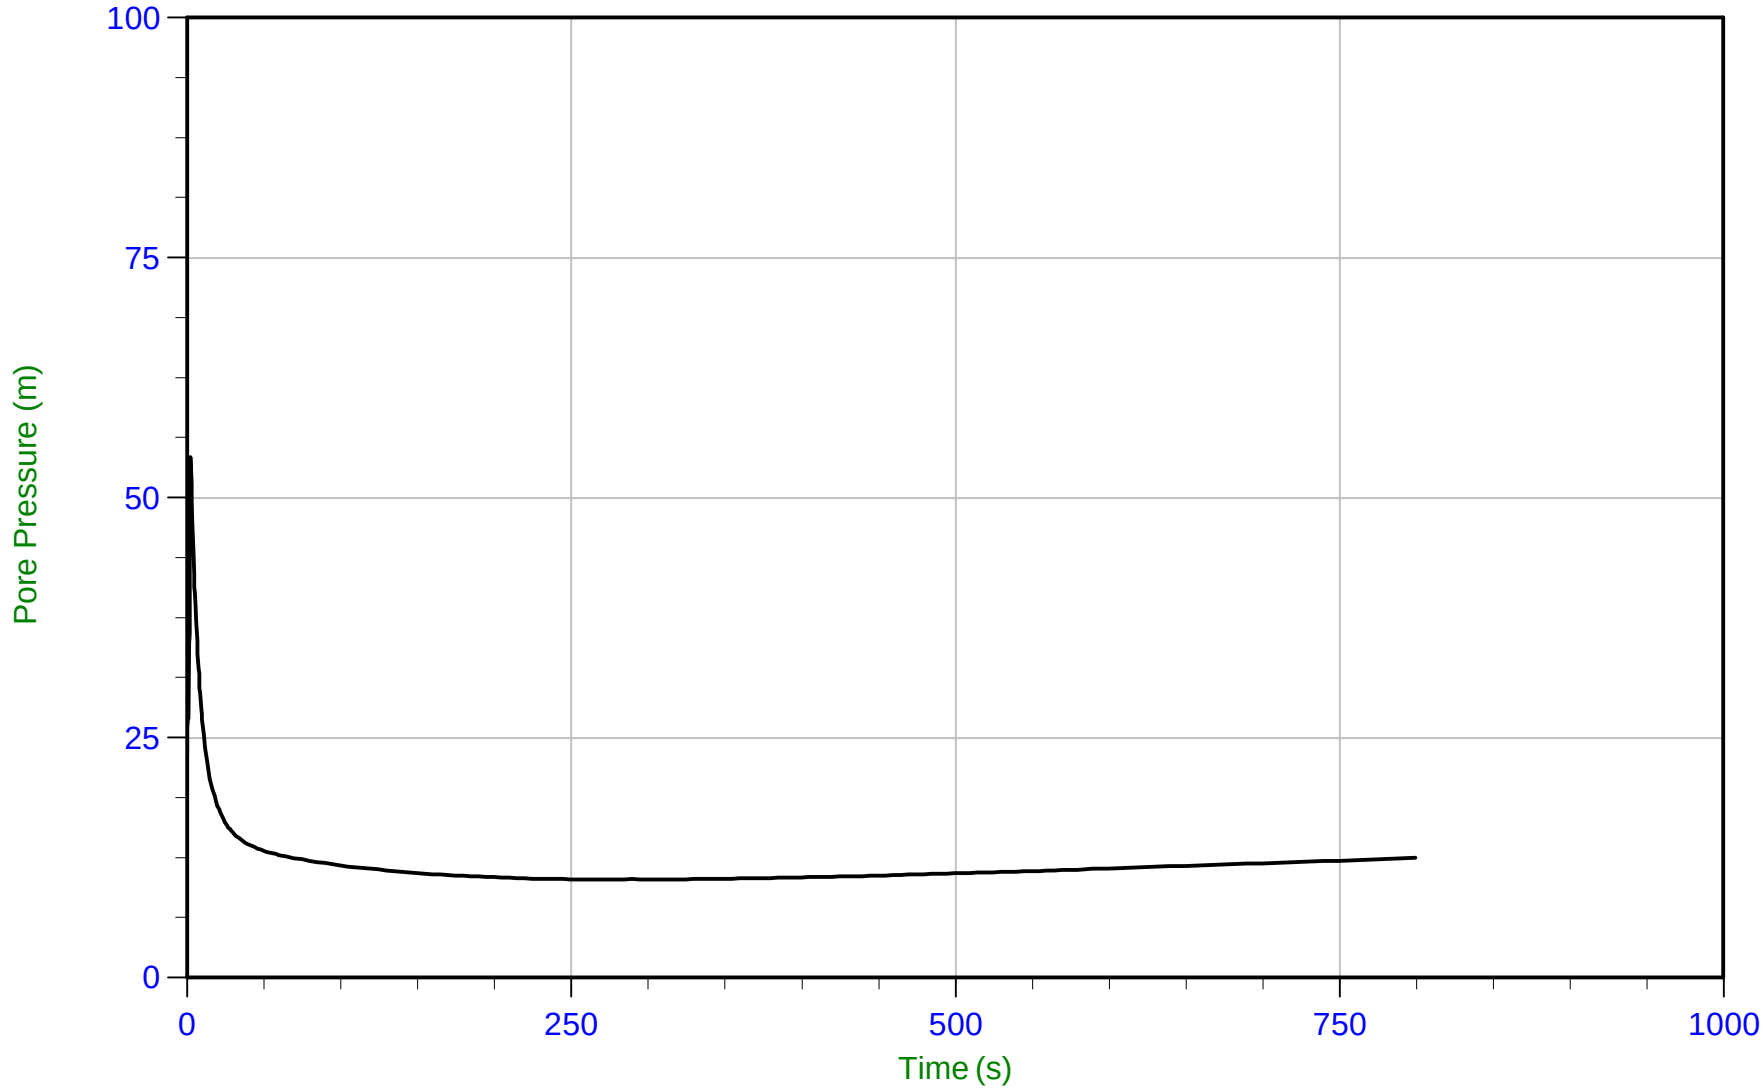

Trace Summary:

Filename: 22-02-23796_RP22-22CPT223.PPF
Depth: 3.875 m / 12.713 ft
Duration: 800.0 s


u Min: 10.2 m
u Max: 54.2 m
u Final: 12.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 07:33
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT223
Cone: 854:T1500F15U35 Area=15 cm²

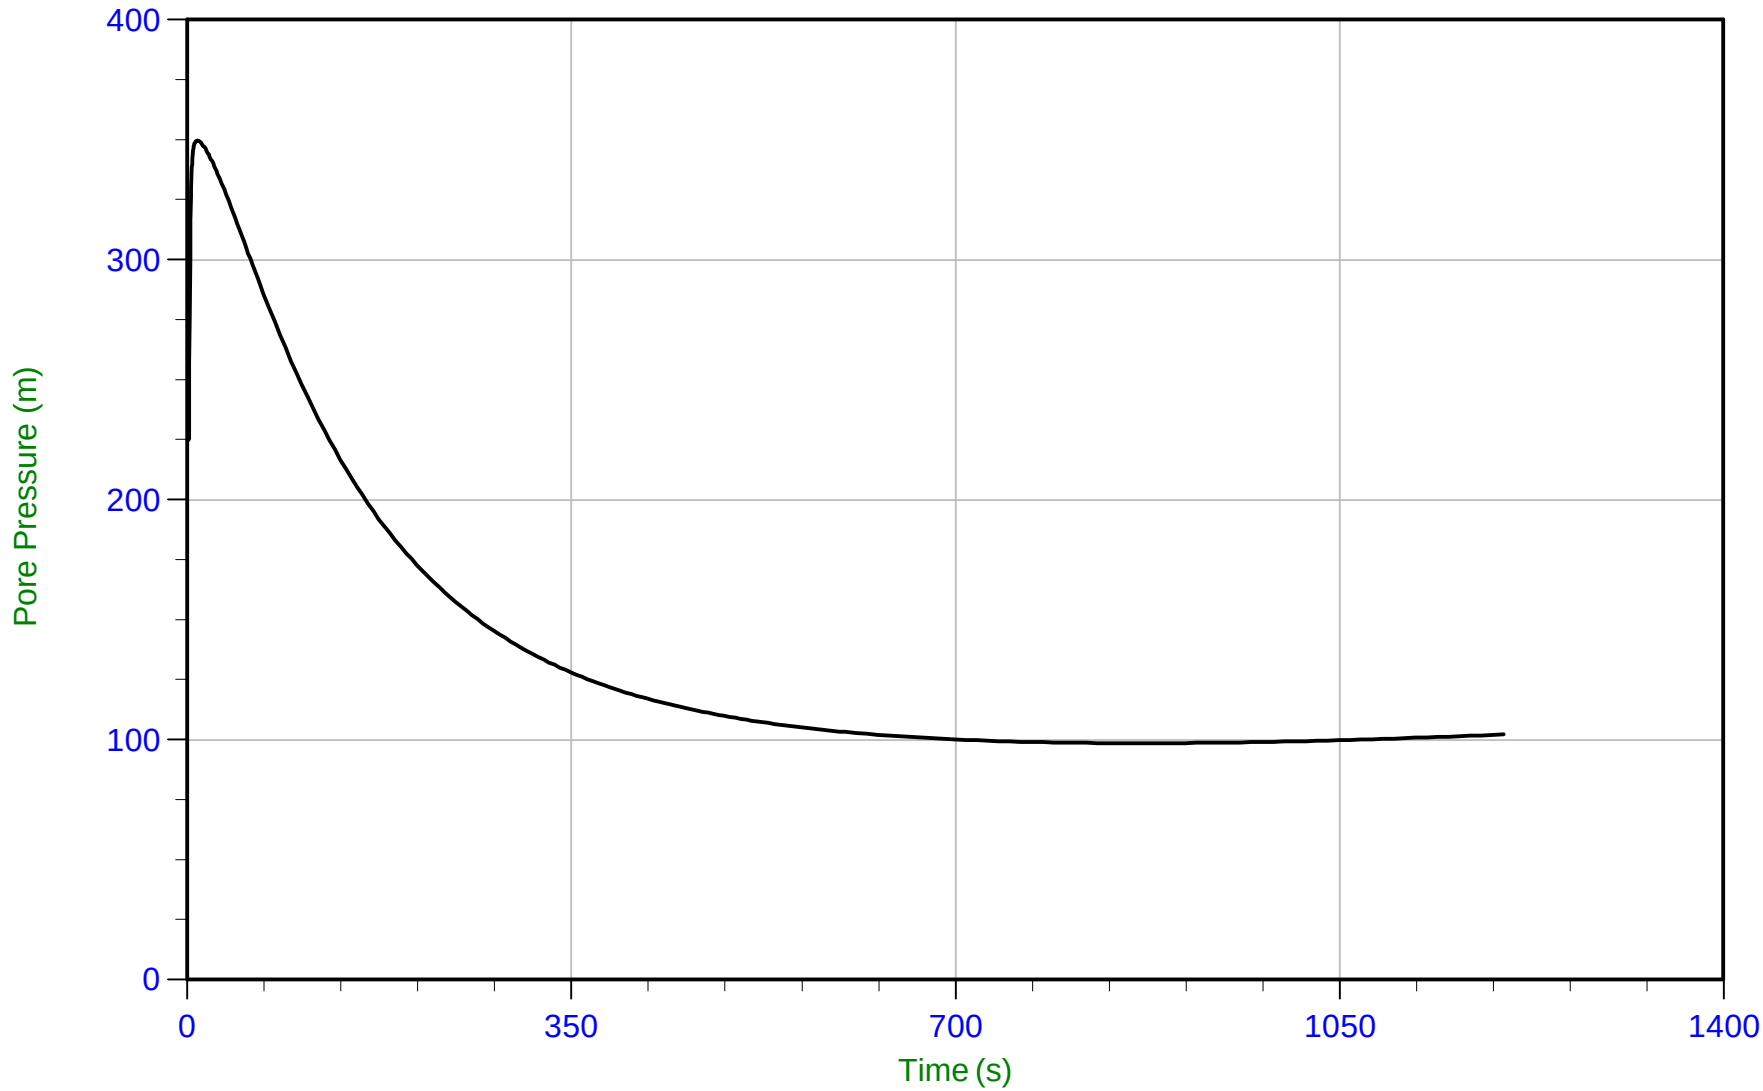

Trace Summary:

Filename: 22-02-23796_RP22-22CPT223.PPF
Depth: 9.875 m / 32.398 ft
Duration: 1200.0 s


u Min: 98.6 m
u Max: 349.6 m
u Final: 102.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 07:33
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT223
Cone: 854:T1500F15U35 Area=15 cm²

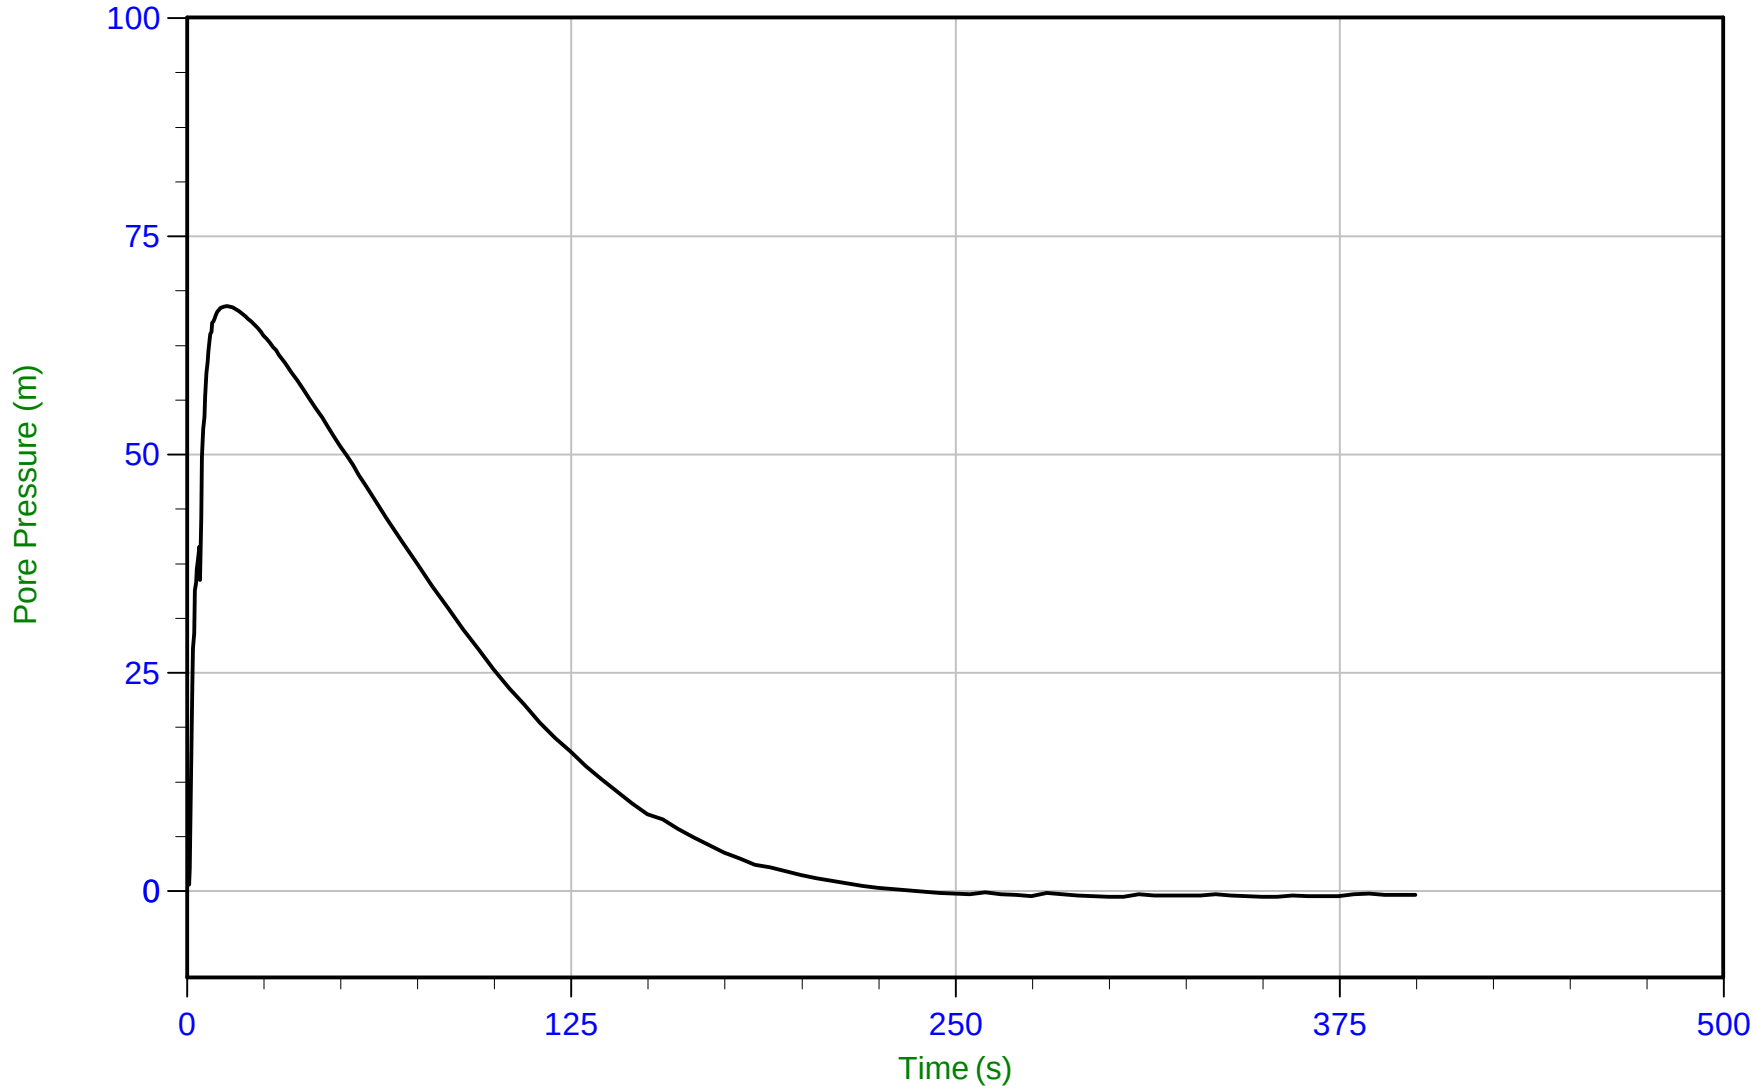

Trace Summary:

Filename: 22-02-23796_RP22-22CPT223.PPF
Depth: 11.025 m / 36.171 ft
Duration: 400.0 s


u Min: -0.7 m
u Max: 66.9 m
u Final: -0.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 09:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT224
Cone: 854:T1500F15U35 Area=15 cm²

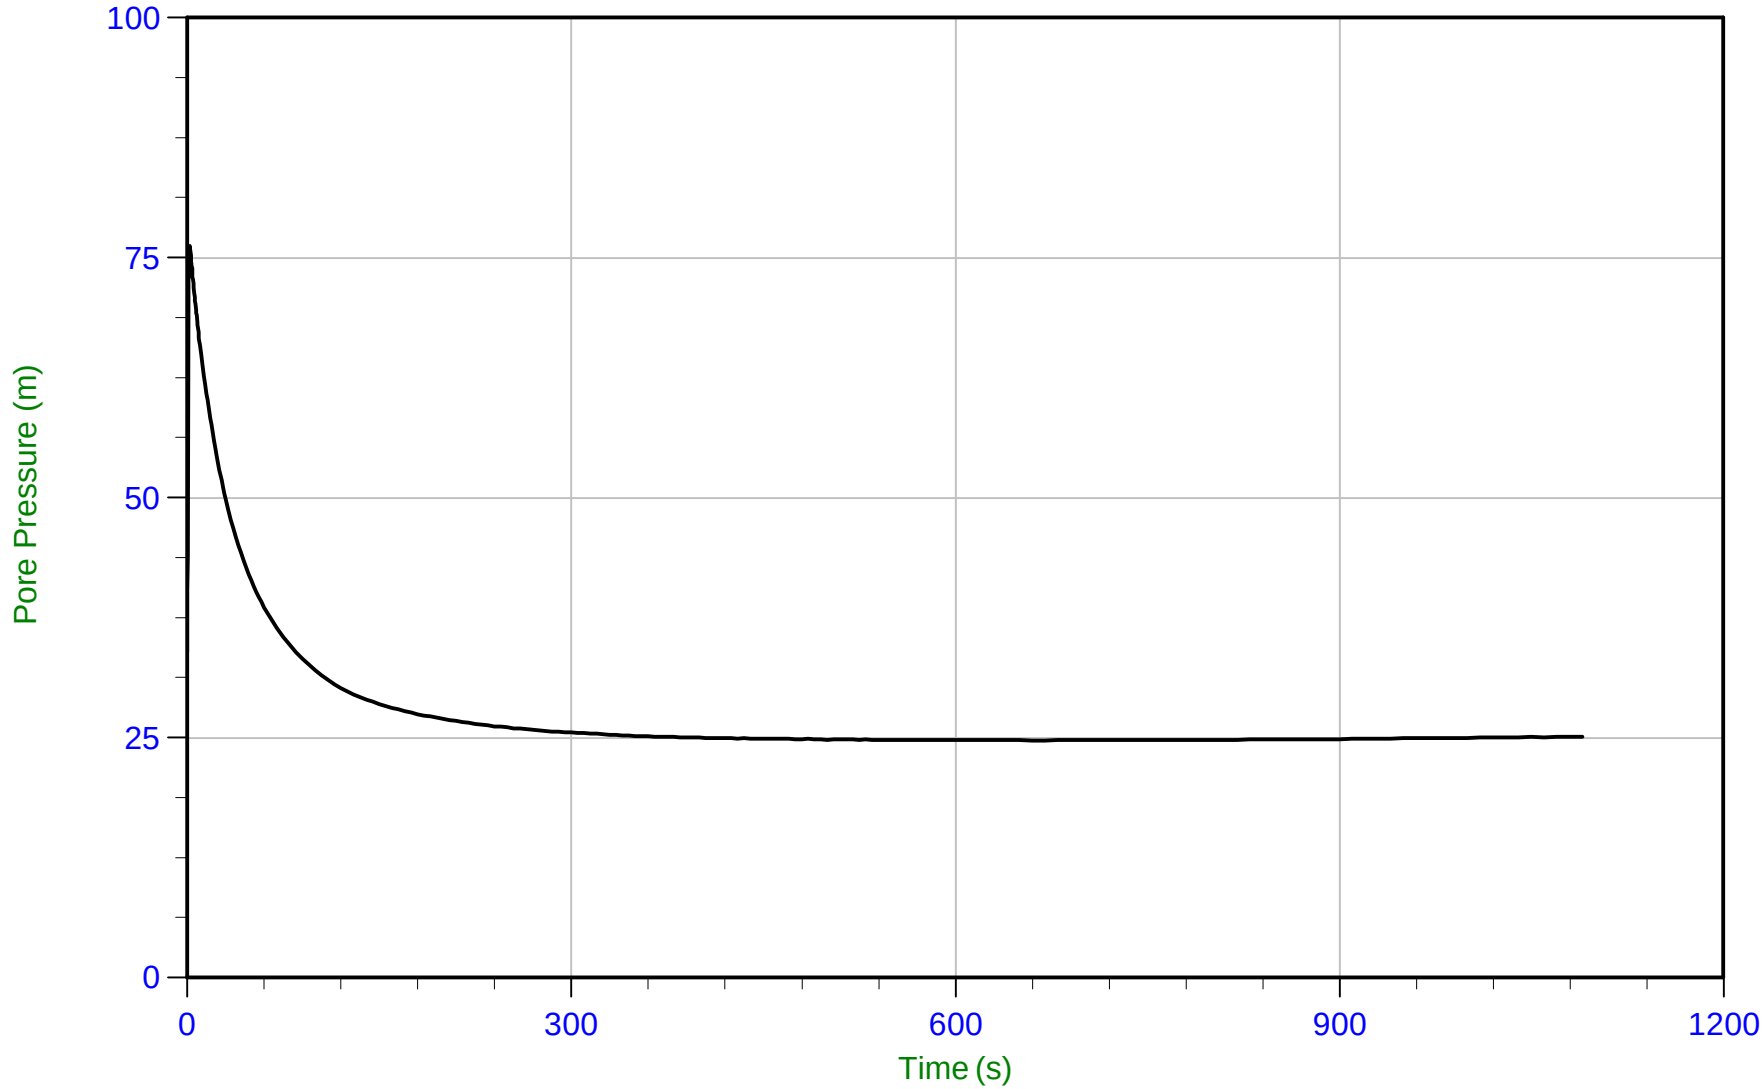

Trace Summary:

Filename: 22-02-23796_RP22-22CPT224.PPF
Depth: 3.875 m / 12.713 ft
Duration: 1090.0 s

u Min: 24.7 m
u Max: 76.2 m
u Final: 25.1 m


WT: 0.700 m / 2.297 ft
Ueq: 3.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 09:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT224
Cone: 854:T1500F15U35 Area=15 cm²

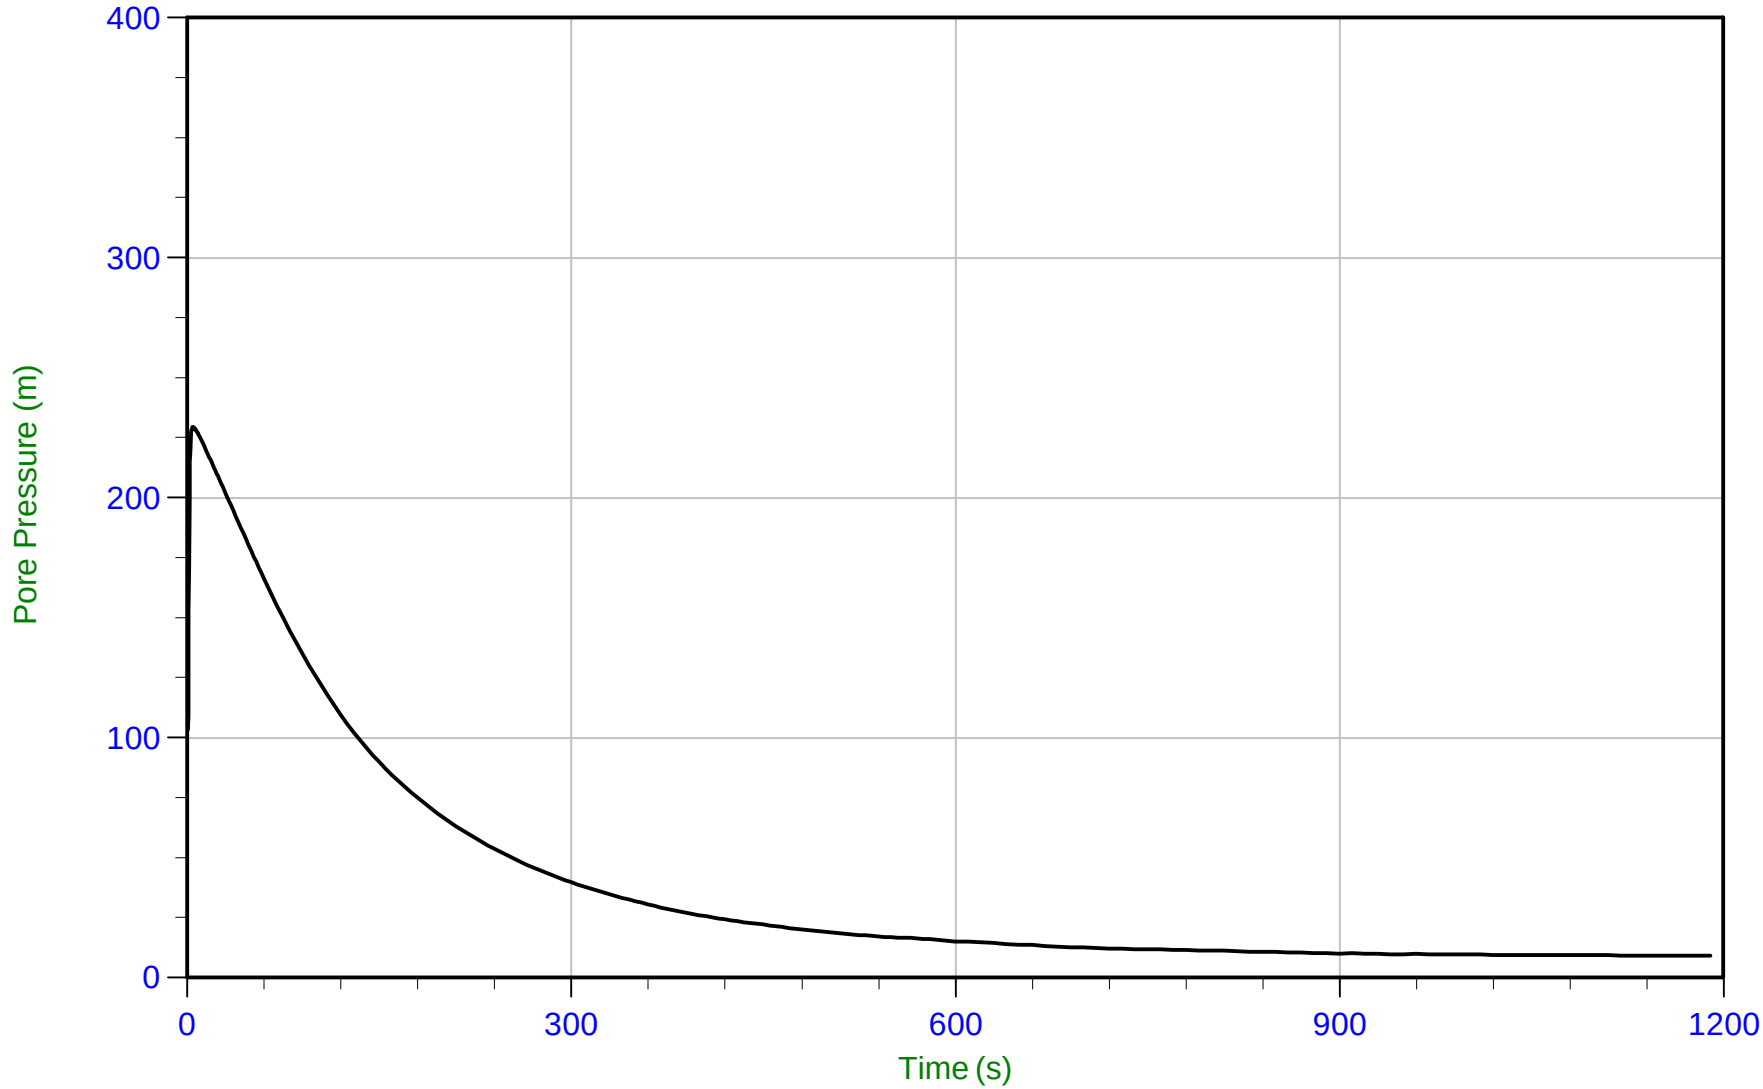

Trace Summary:

Filename: 22-02-23796_RP22-22CPT224.PPF
Depth: 9.175 m / 30.101 ft
Duration: 1190.0 s

u Min: 9.1 m
u Max: 229.4 m
u Final: 9.1 m


WT: 0.700 m / 2.297 ft
Ueq: 8.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 09:15
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT224
Cone: 854:T1500F15U35 Area=15 cm²

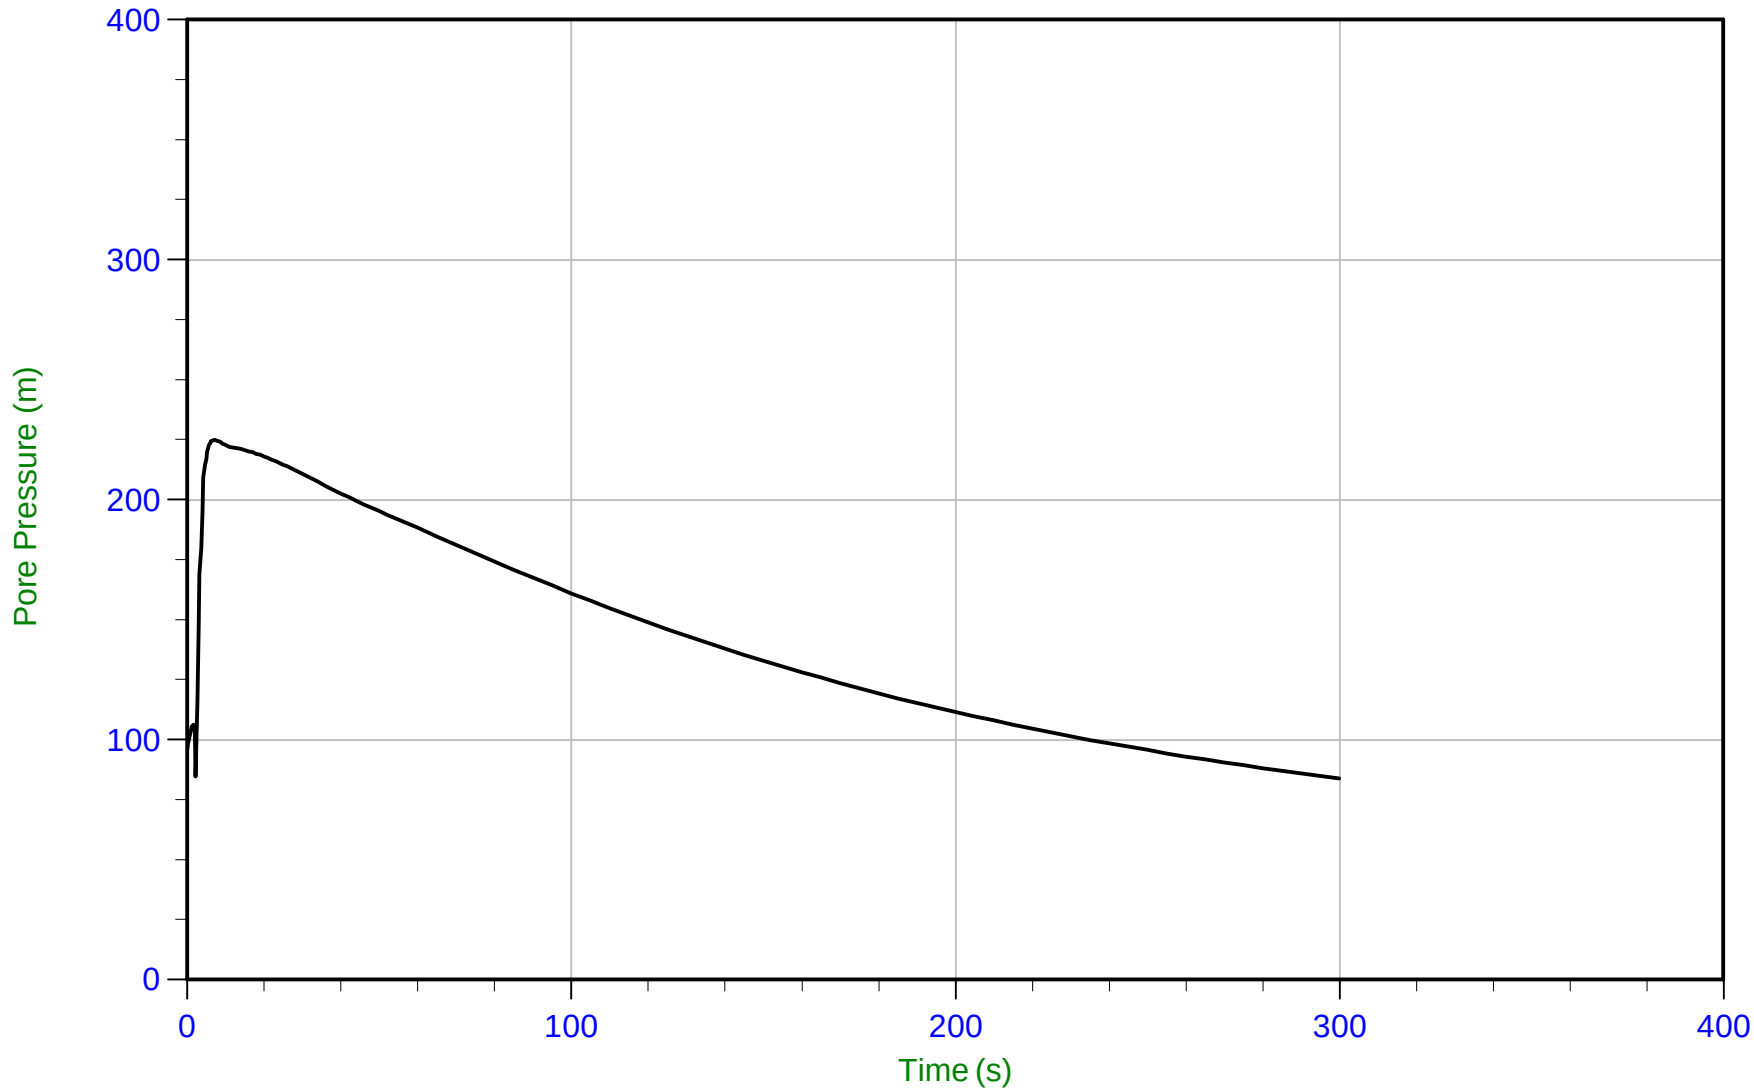

Trace Summary:

Filename: 22-02-23796_RP22-22CPT224.PPF
Depth: 11.275 m / 36.991 ft
Duration: 300.0 s

u Min: 83.8 m
u Max: 224.9 m
u Final: 83.8 m

WT: 0.700 m / 2.297 ft
Ueq: 10.6 m
U(50): 117.73 m


T(50): 177.0 s
Ir: 100
Ch: 4.0 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 06:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT225
Cone: 821:T1000F10U35 Area=15 cm²

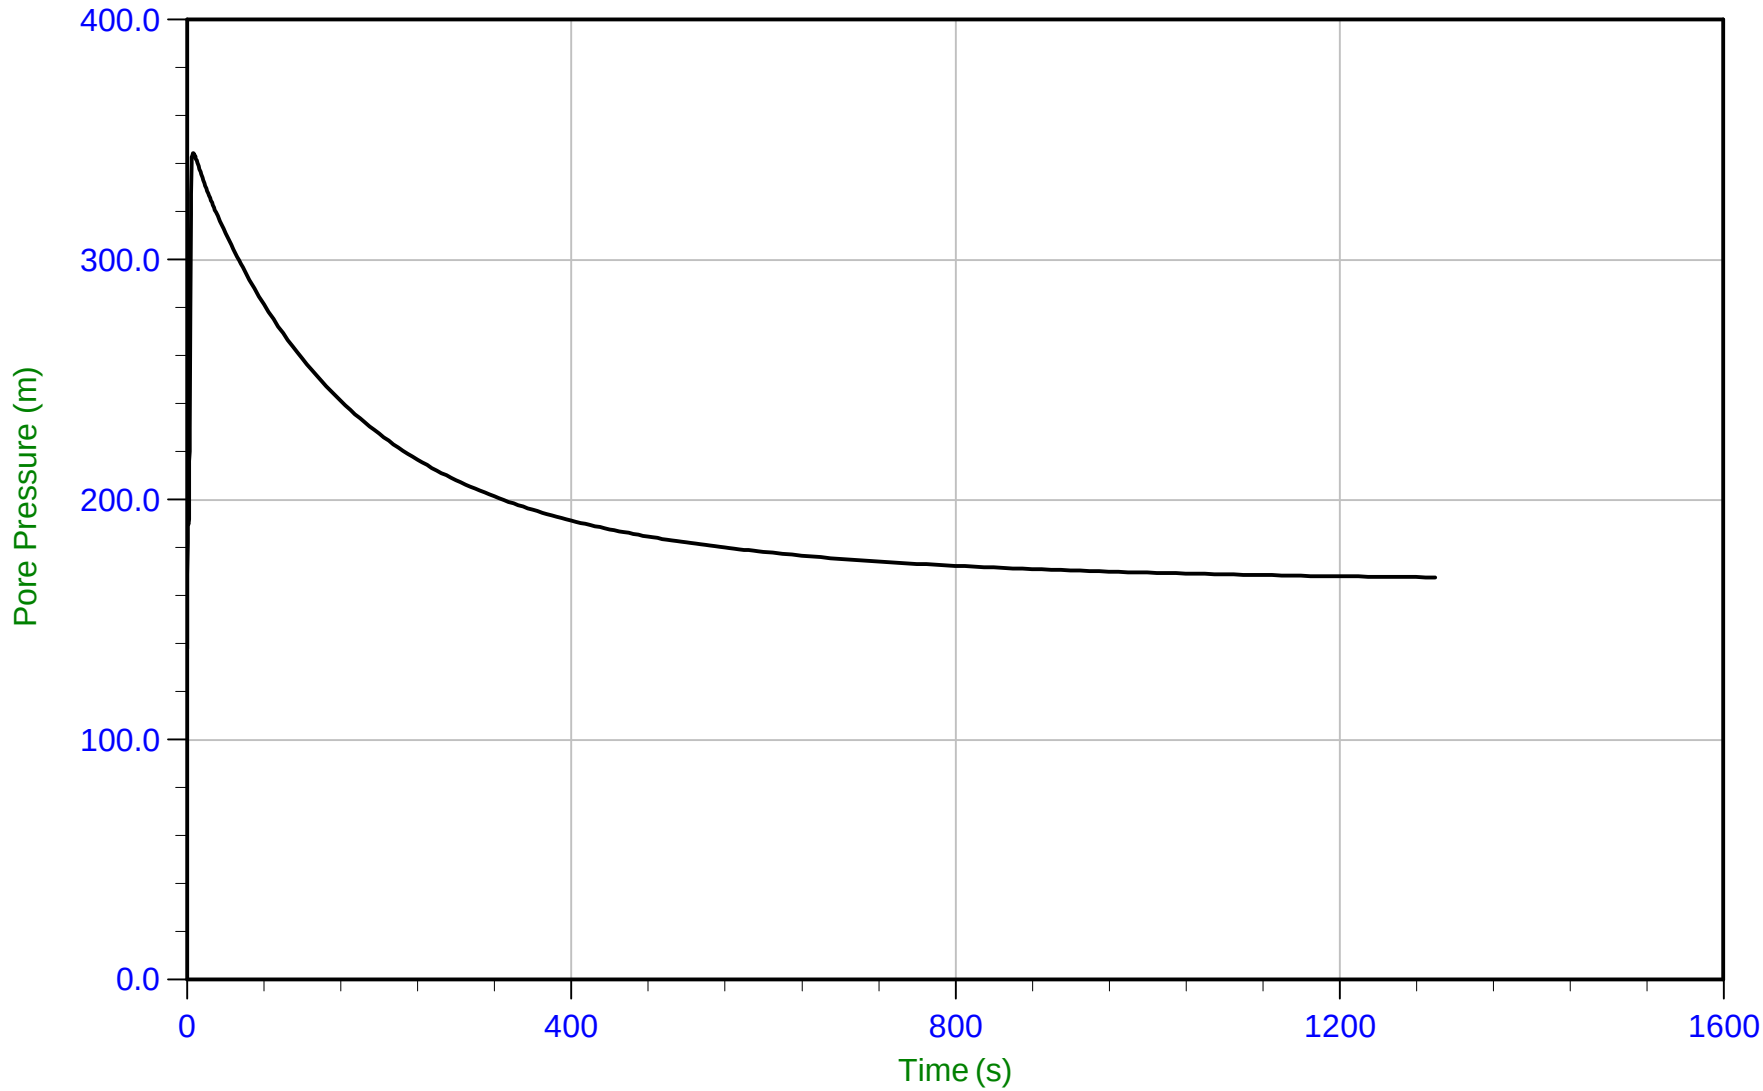

Trace Summary:

Filename: 22-02-23796_RP22-22CPT225.PPF
Depth: 6.175 m / 20.259 ft
Duration: 1300.0 s


u Min: 137.9 m
u Max: 344.4 m
u Final: 167.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 06:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT225
Cone: 821:T1000F10U35 Area=15 cm²

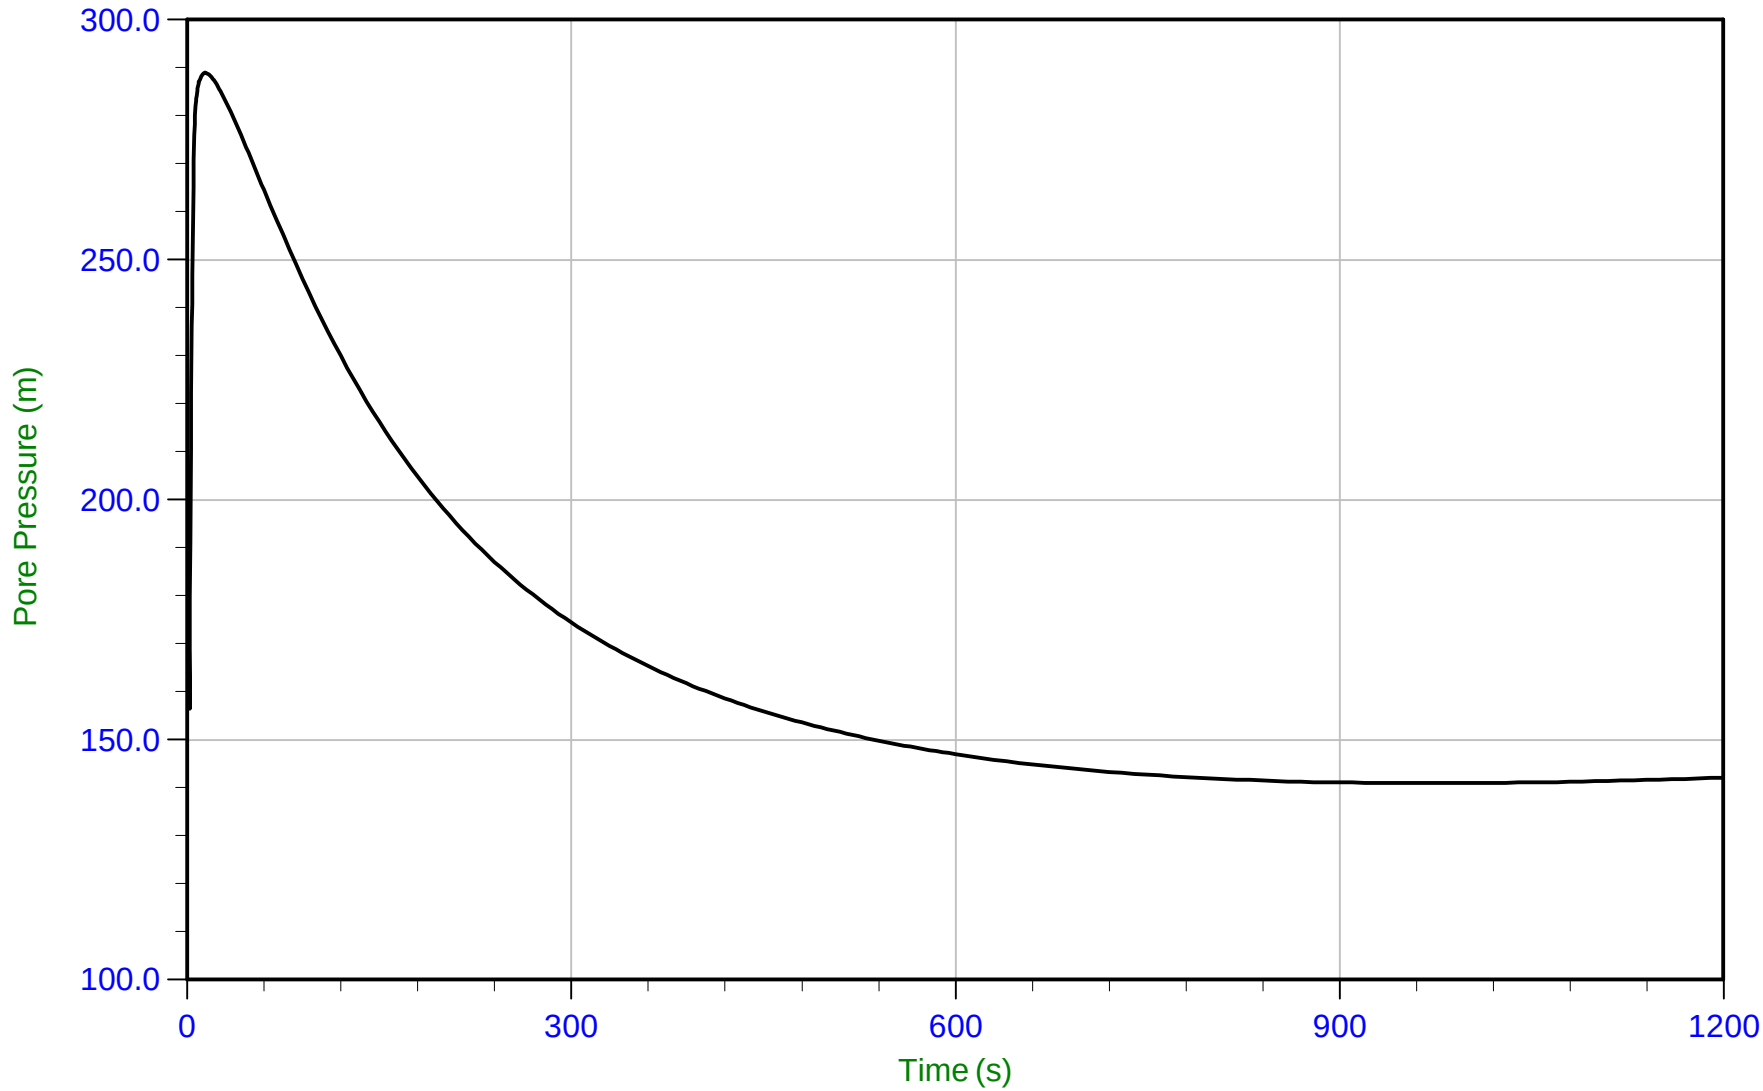

Trace Summary:

Filename: 22-02-23796_RP22-22CPT225.PPF
Depth: 9.225 m / 30.265 ft
Duration: 1200.0 s


u Min: 141.0 m
u Max: 289.0 m
u Final: 142.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 11:08
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT226
Cone: 854:T1500F15U35 Area=15 cm²

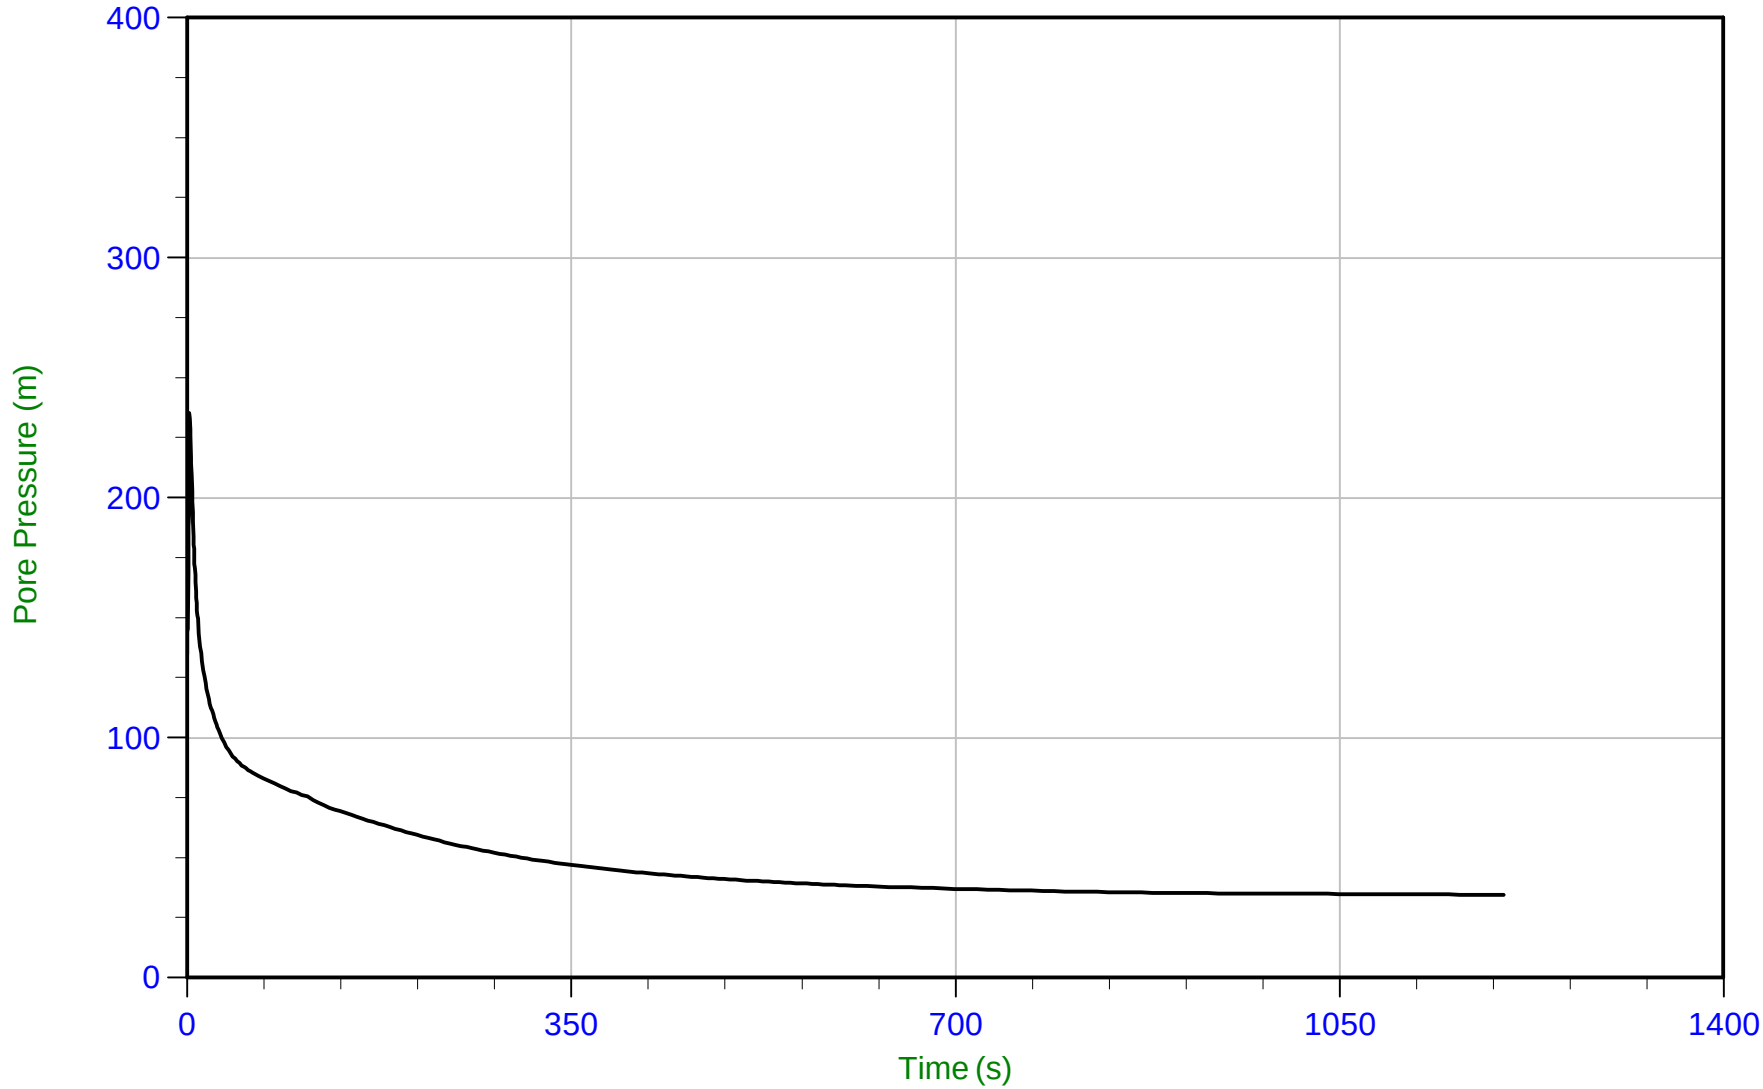

Trace Summary:

Filename: 22-02-23796_RP22-22CPT226.PPF
Depth: 3.925 m / 12.877 ft
Duration: 1200.0 s


u Min: 34.5 m
u Max: 235.4 m
u Final: 34.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 11:08
Site: Brooks, Alberta

Sounding: RPCPT22-22CPT226
Cone: 854:T1500F15U35 Area=15 cm²

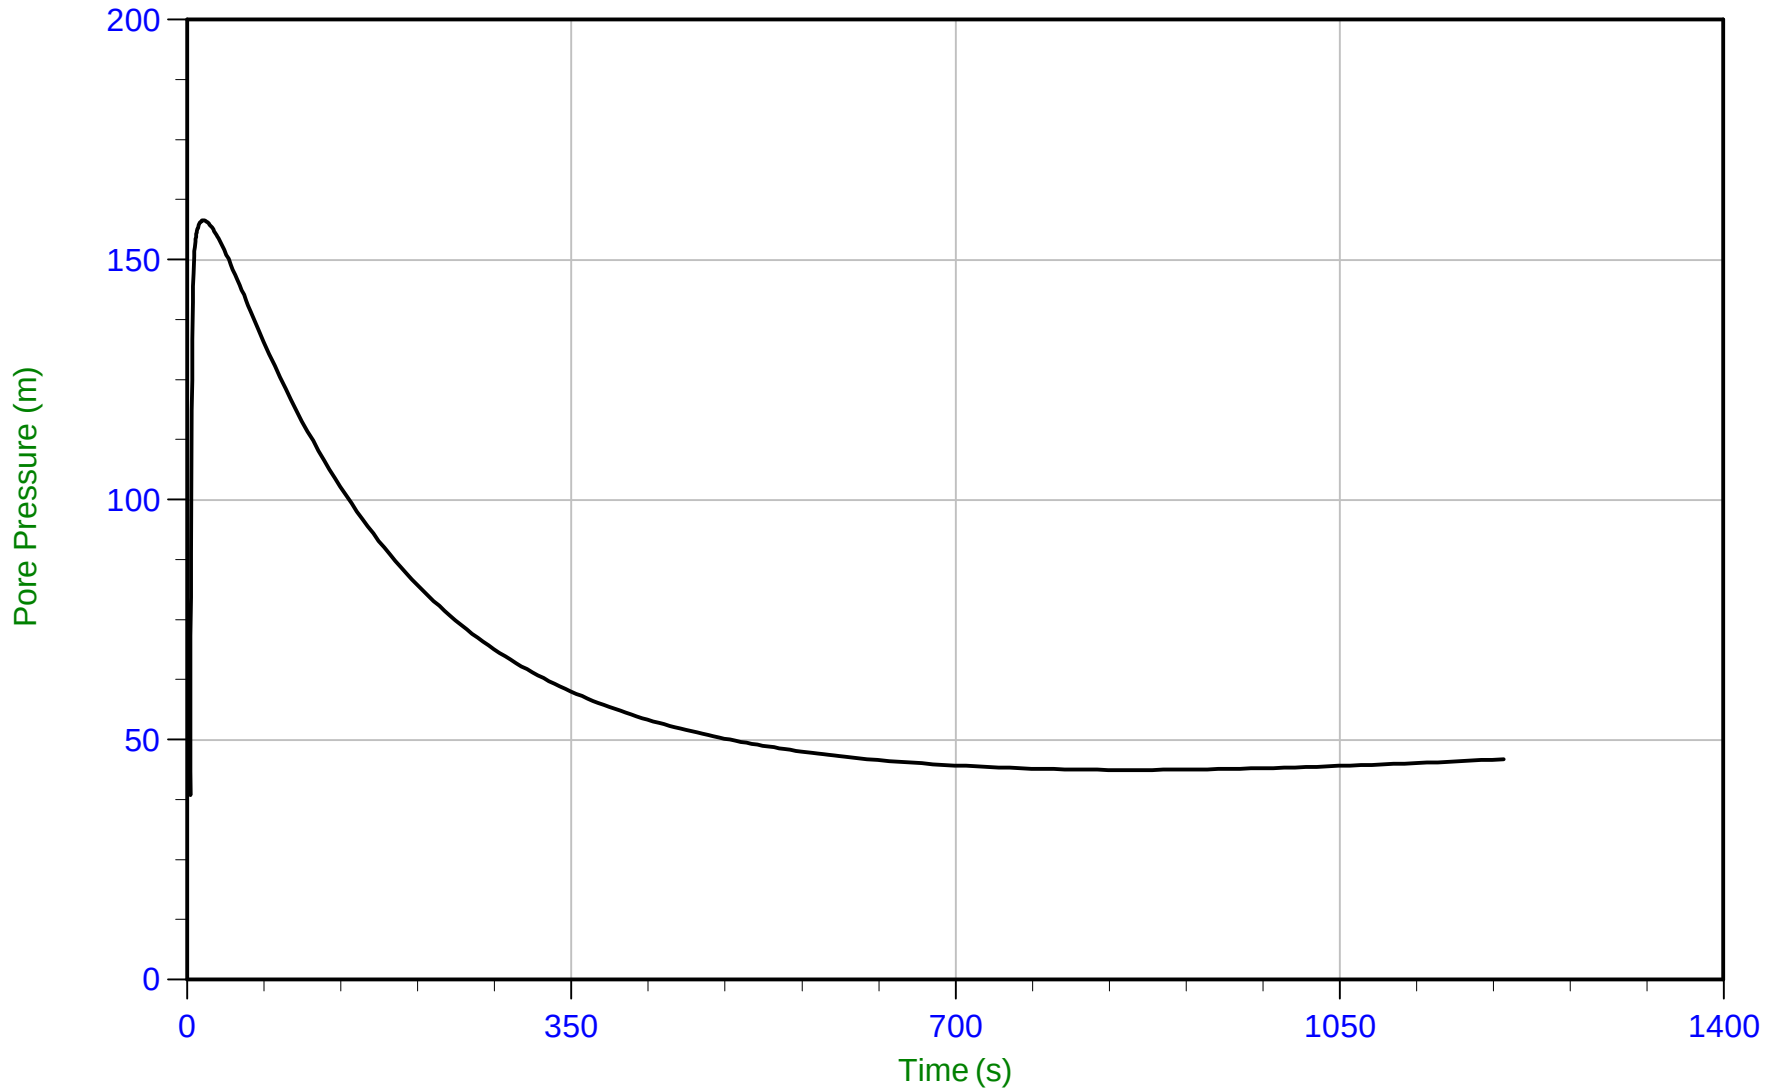

Trace Summary:

Filename: 22-02-23796_RP22-22CPT226.PPF
Depth: 9.050 m / 29.691 ft
Duration: 1200.0 s


u Min: 38.5 m
u Max: 158.2 m
u Final: 46.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 12:42
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT227
Cone: 854:T1500F15U35 Area=15 cm²

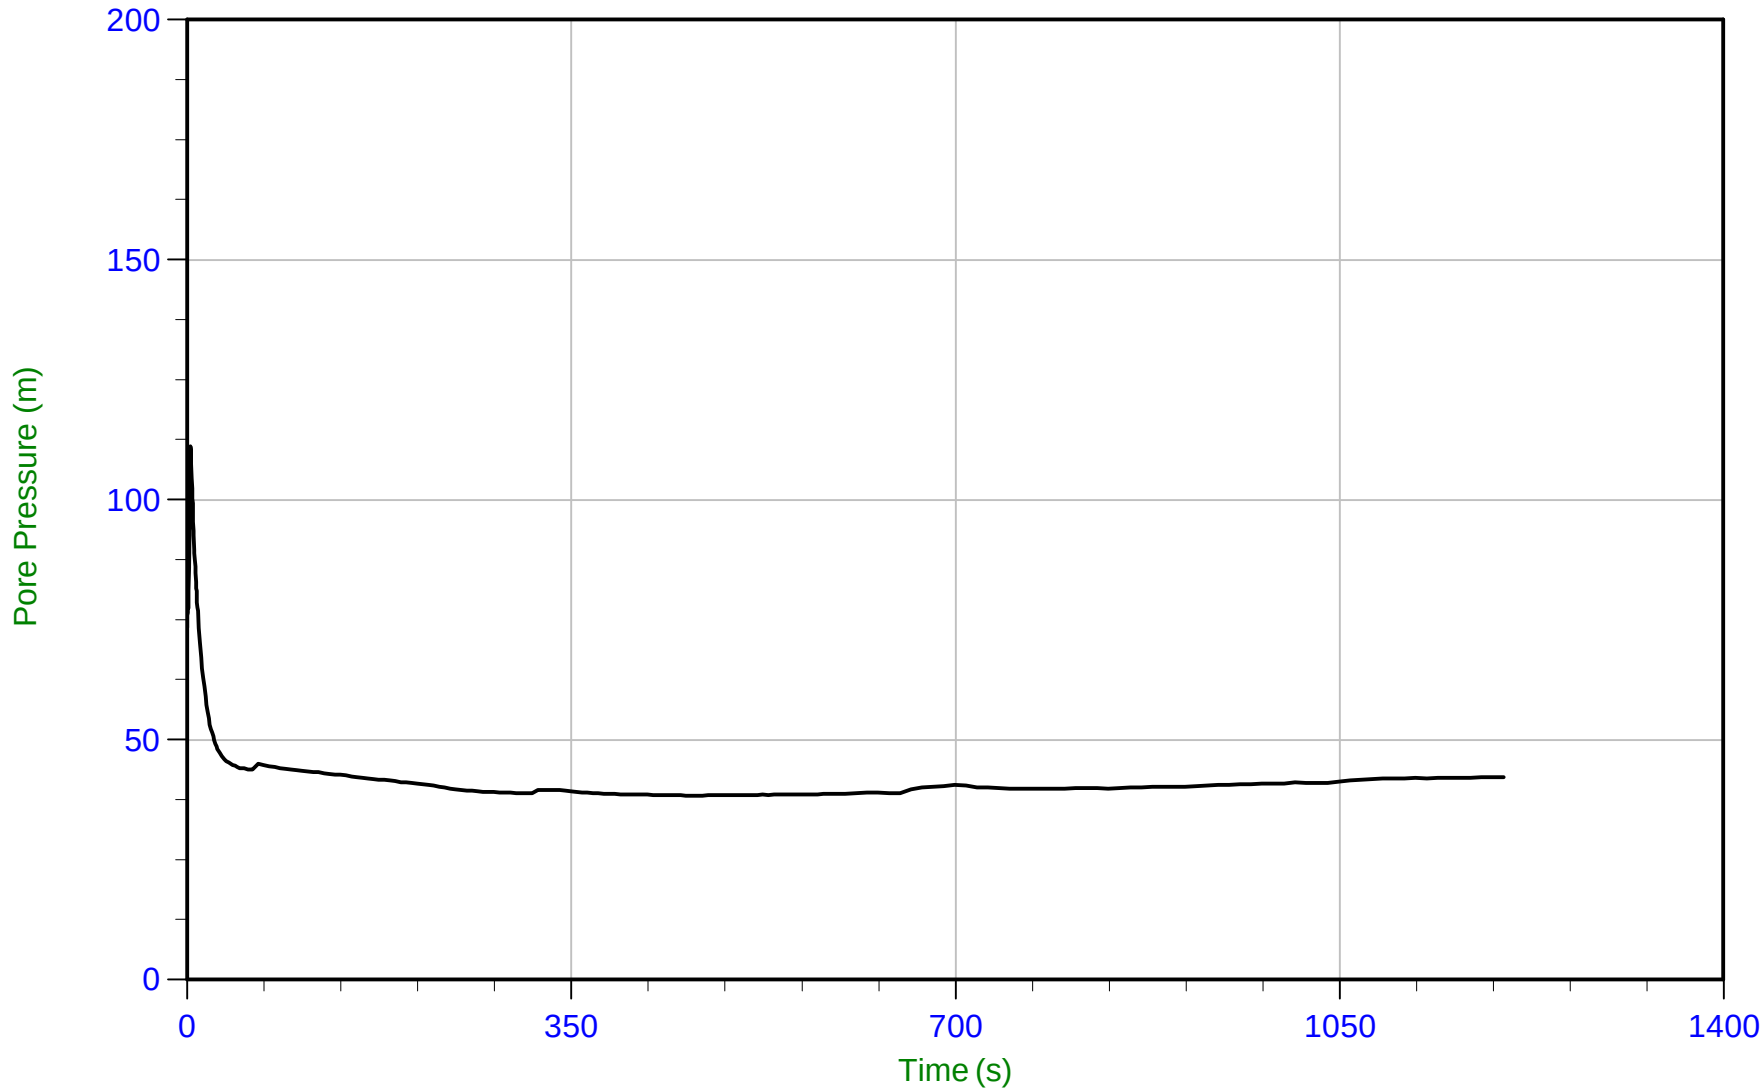

Trace Summary:

Filename: 22-02-23796_RS22-22CPT227.PPF
Depth: 4.725 m / 15.502 ft
Duration: 1200.0 s


u Min: 38.3 m
u Max: 111.2 m
u Final: 42.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 16:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT230
Cone: 854:T1500F15U35 Area=15 cm²

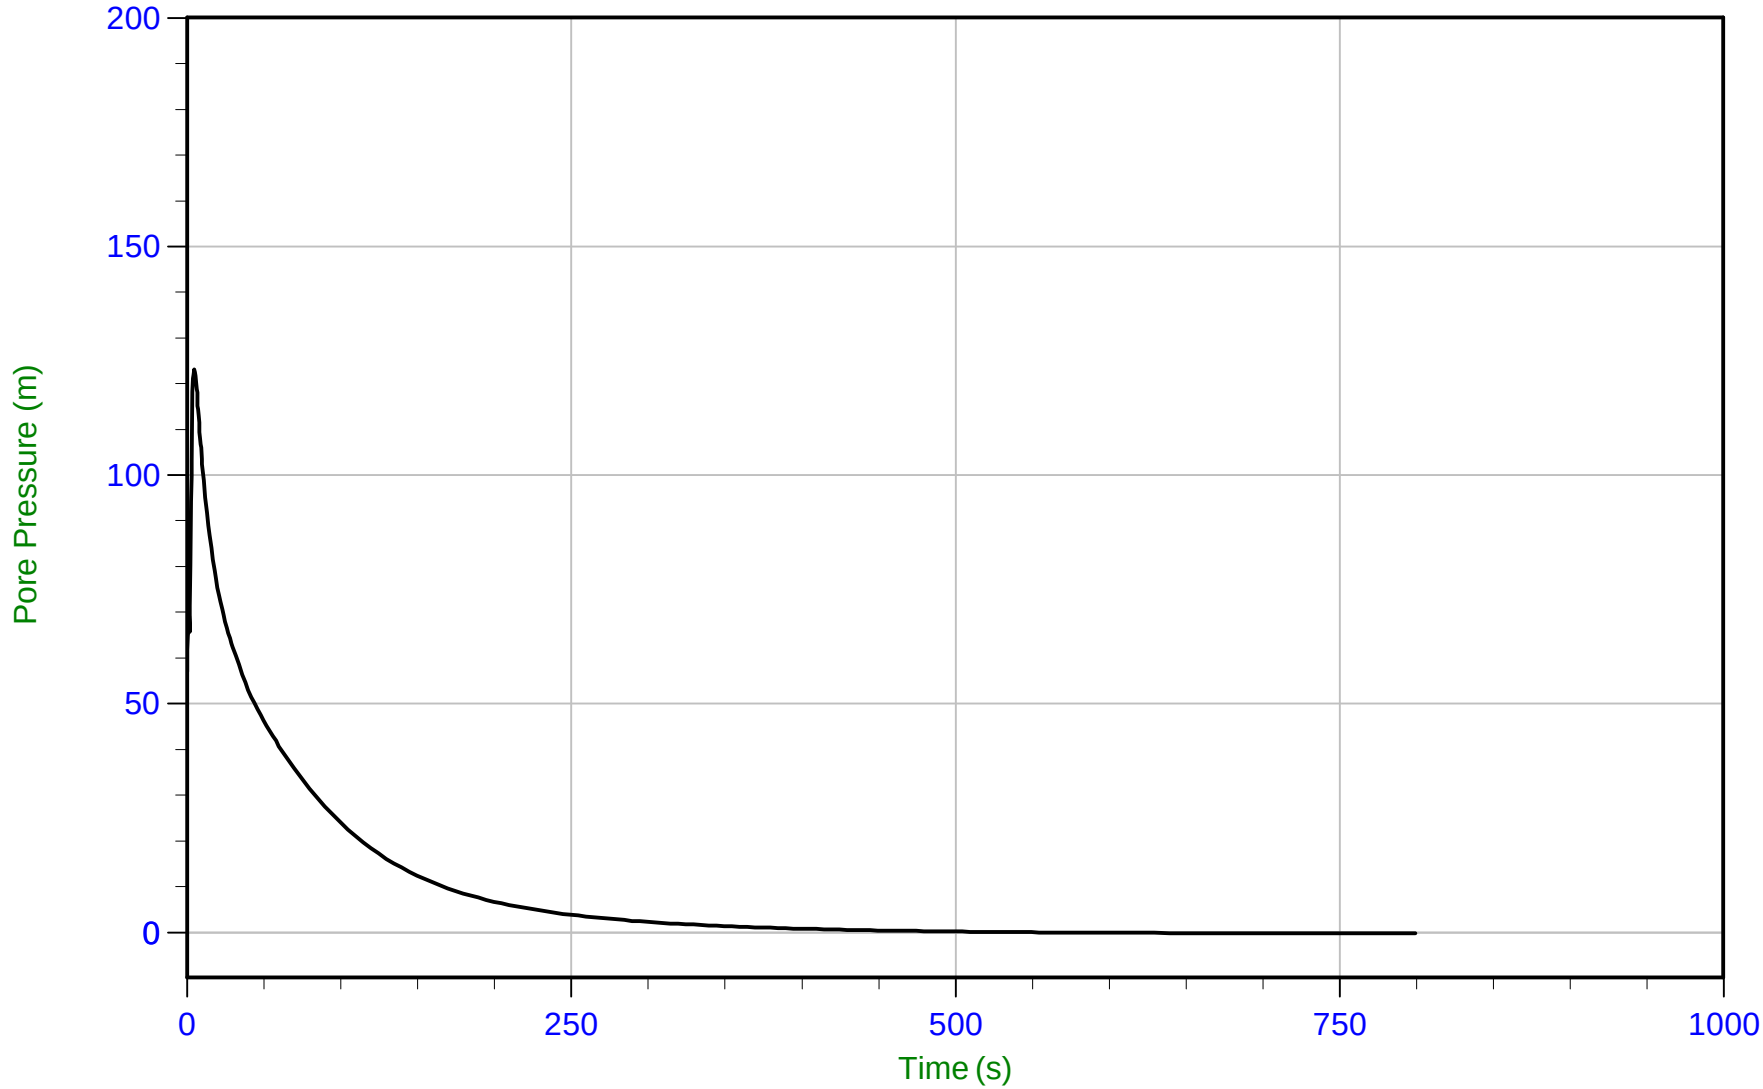

Trace Summary:

Filename: 22-02-23796_RP22-22CPT230.PPF
Depth: 5.825 m / 19.111 ft
Duration: 800.0 s


u Min: -0.3 m
u Max: 123.0 m
u Final: -0.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 16:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT230
Cone: 854:T1500F15U35 Area=15 cm²

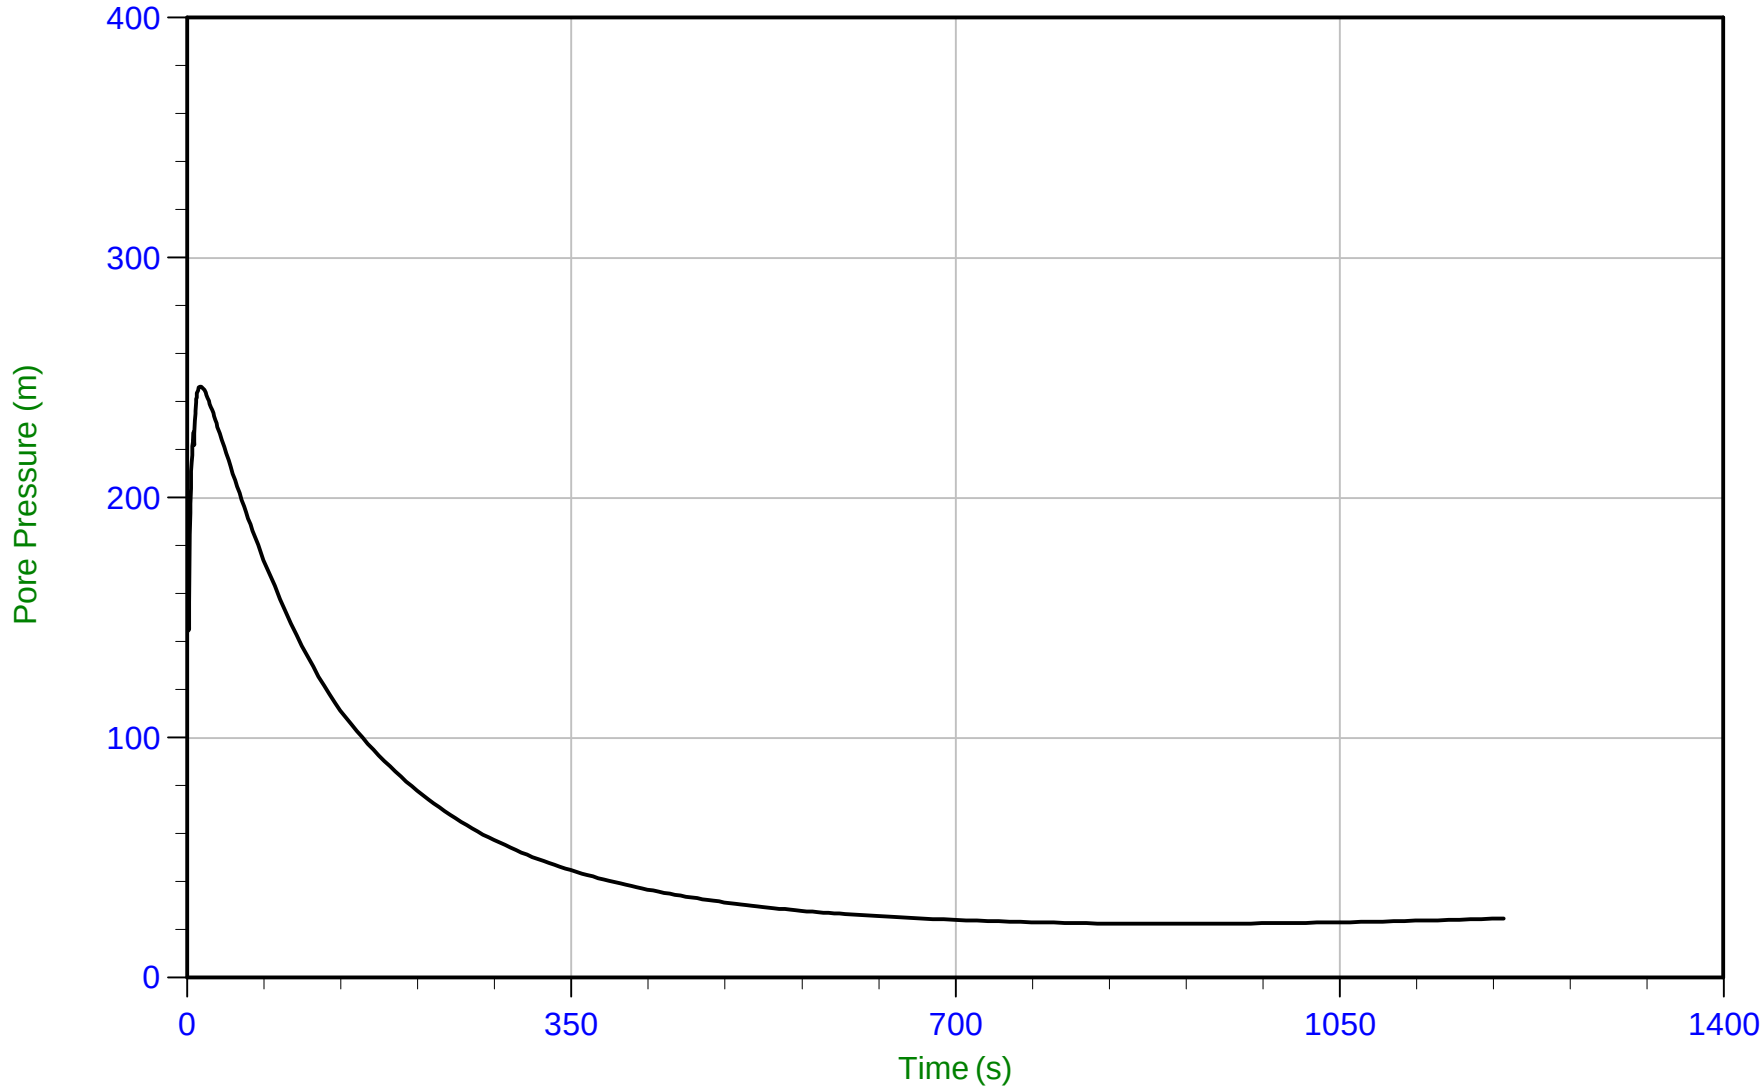

Trace Summary:

Filename: 22-02-23796_RP22-22CPT230.PPF
Depth: 9.100 m / 29.855 ft
Duration: 1200.0 s


u Min: 22.5 m
u Max: 246.4 m
u Final: 24.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 09:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT231A
Cone: 854:T1500F15U35 Area=15 cm²

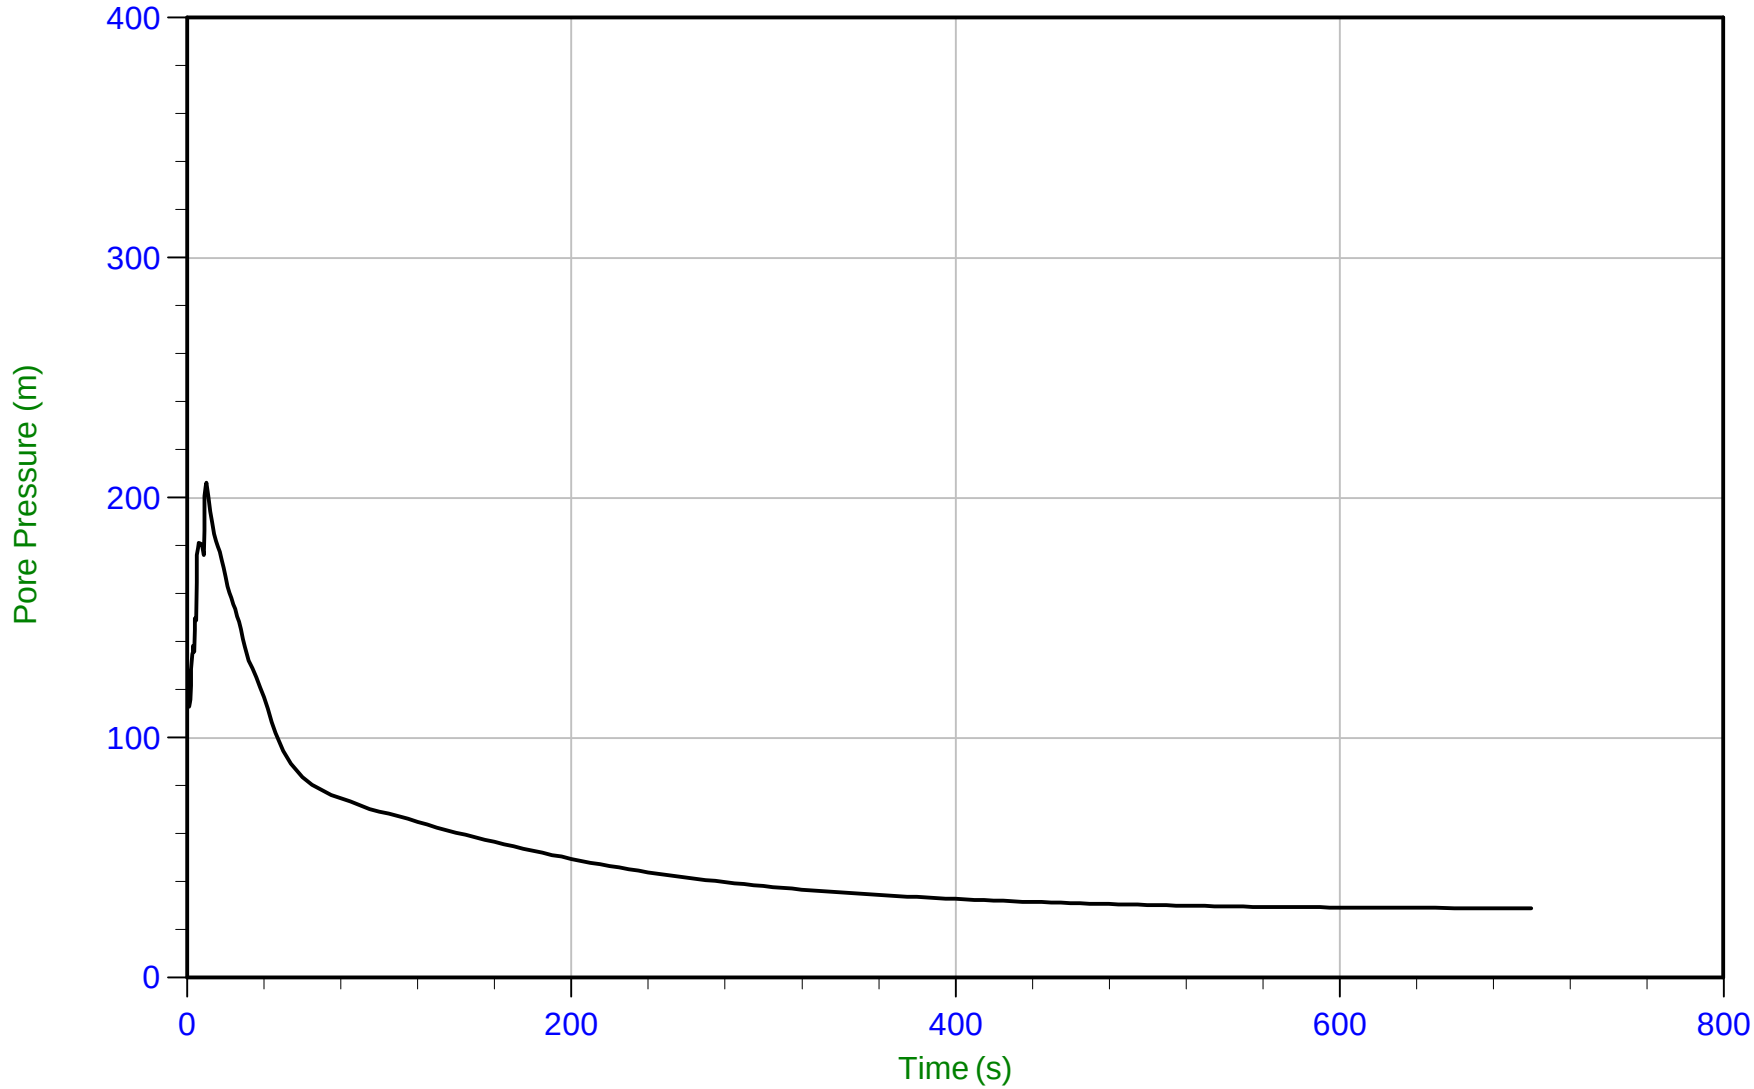

Trace Summary:

Filename: 22-02-23796_RP22-22CPT231A.PPF
Depth: 4.975 m / 16.322 ft
Duration: 700.0 s

u Min: 29.0 m
u Max: 206.2 m
u Final: 29.0 m


WT: 2.500 m / 8.202 ft
Ueq: 2.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 09:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT231A
Cone: 854:T1500F15U35 Area=15 cm²

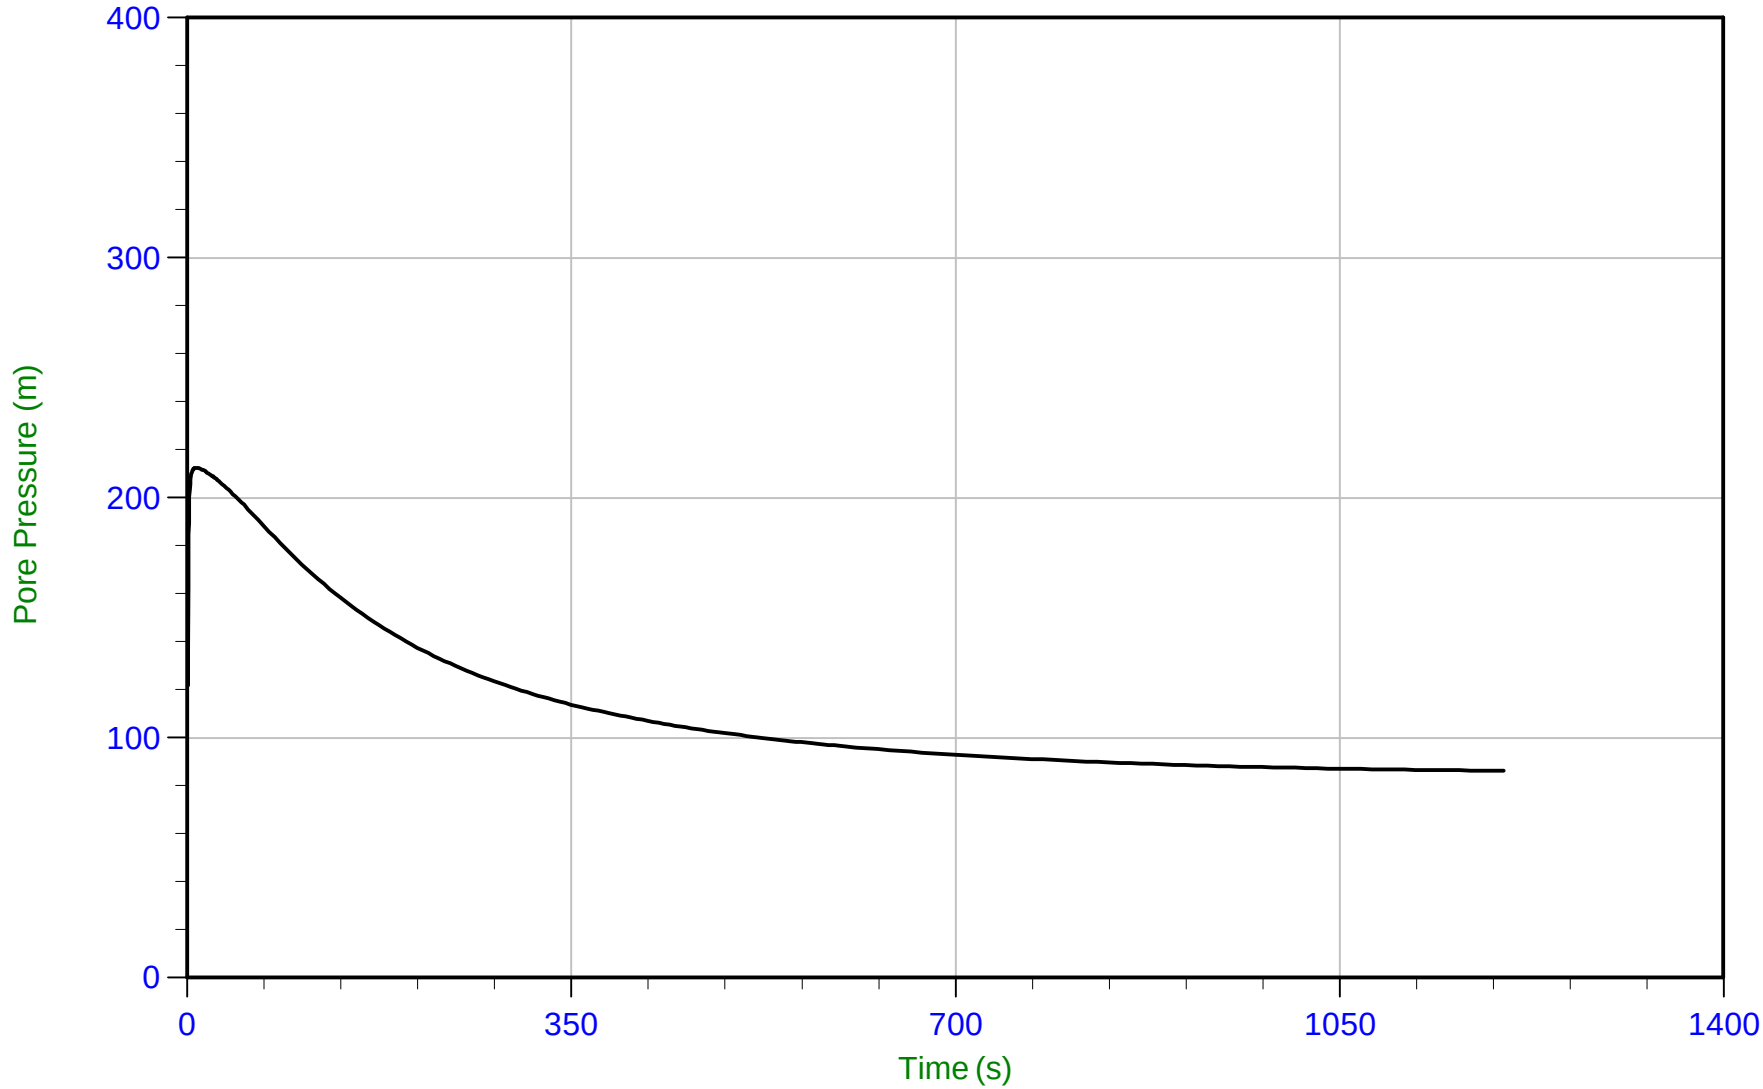

Trace Summary:

Filename: 22-02-23796_RP22-22CPT231A.PPF
Depth: 7.100 m / 23.294 ft
Duration: 1200.0 s


u Min: 86.2 m
u Max: 212.5 m
u Final: 86.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 10:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT232
Cone: 854:T1500F15U35 Area=15 cm²

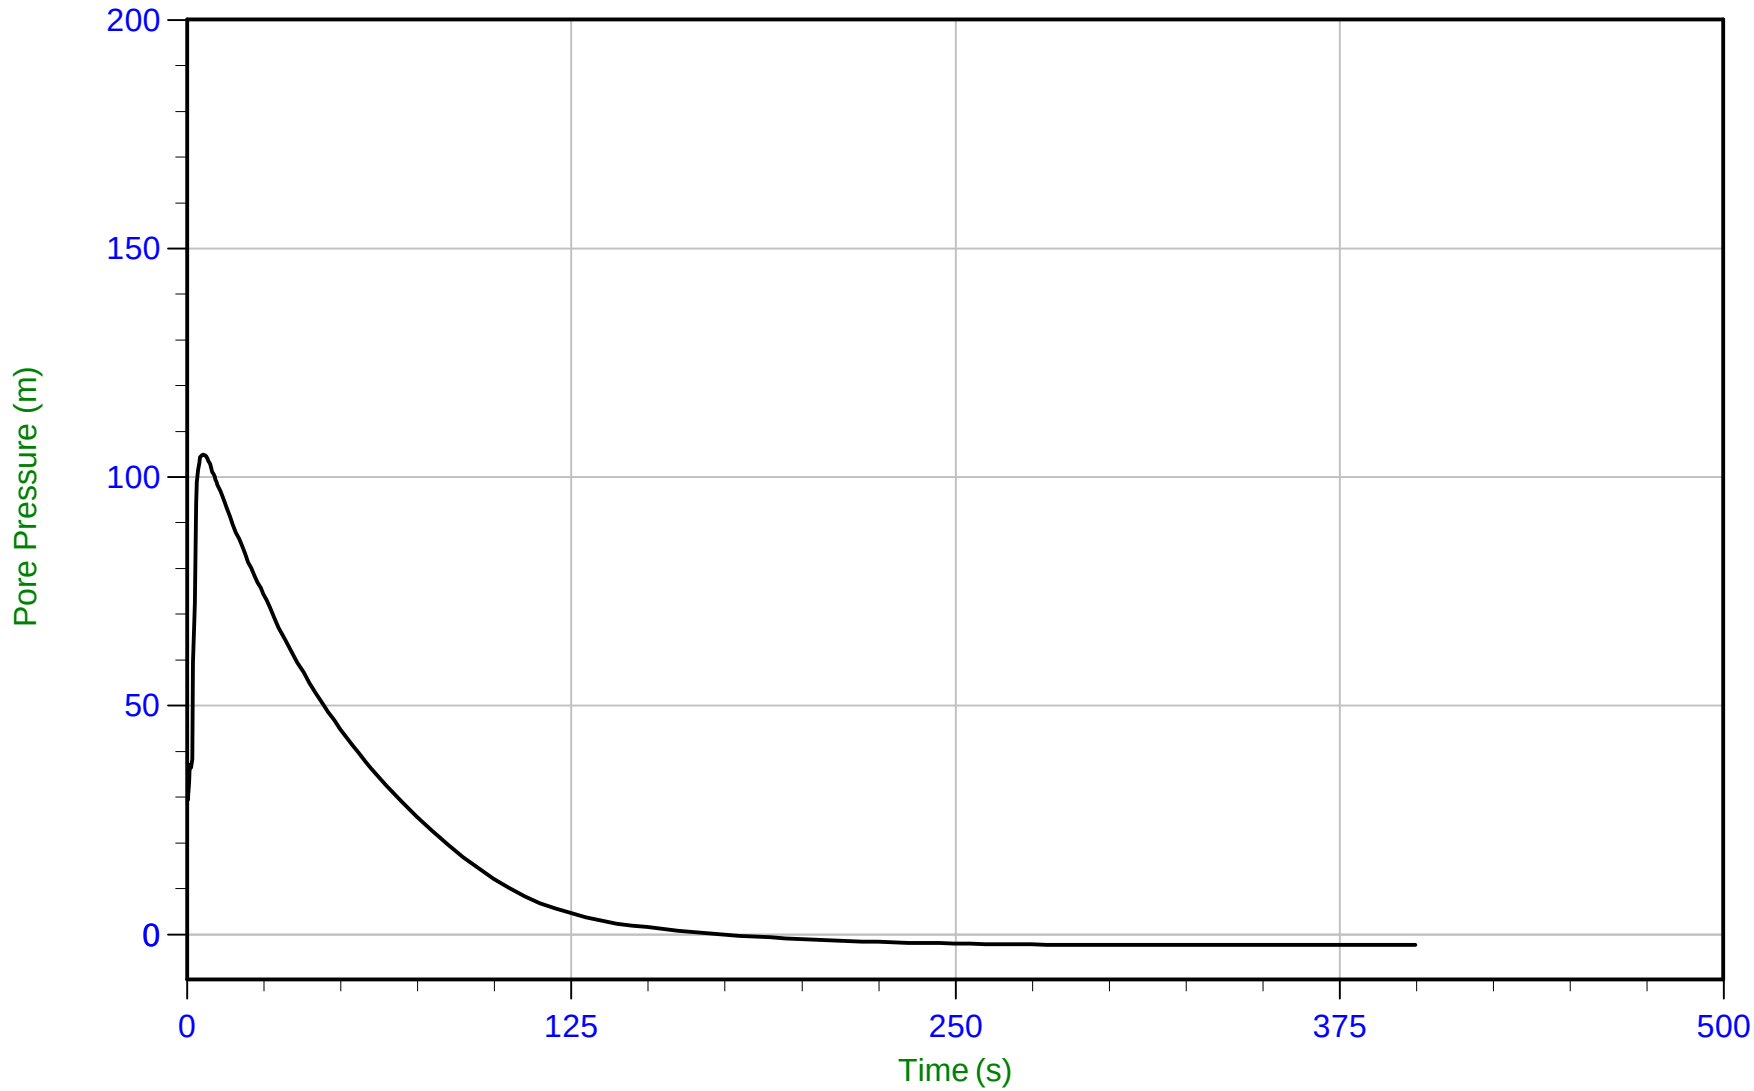

Trace Summary:

Filename: 22-02-23796_RP22-22CPT232.PPF
Depth: 5.800 m / 19.029 ft
Duration: 400.0 s


u Min: -2.4 m
u Max: 104.9 m
u Final: -2.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 10:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT232
Cone: 854:T1500F15U35 Area=15 cm²

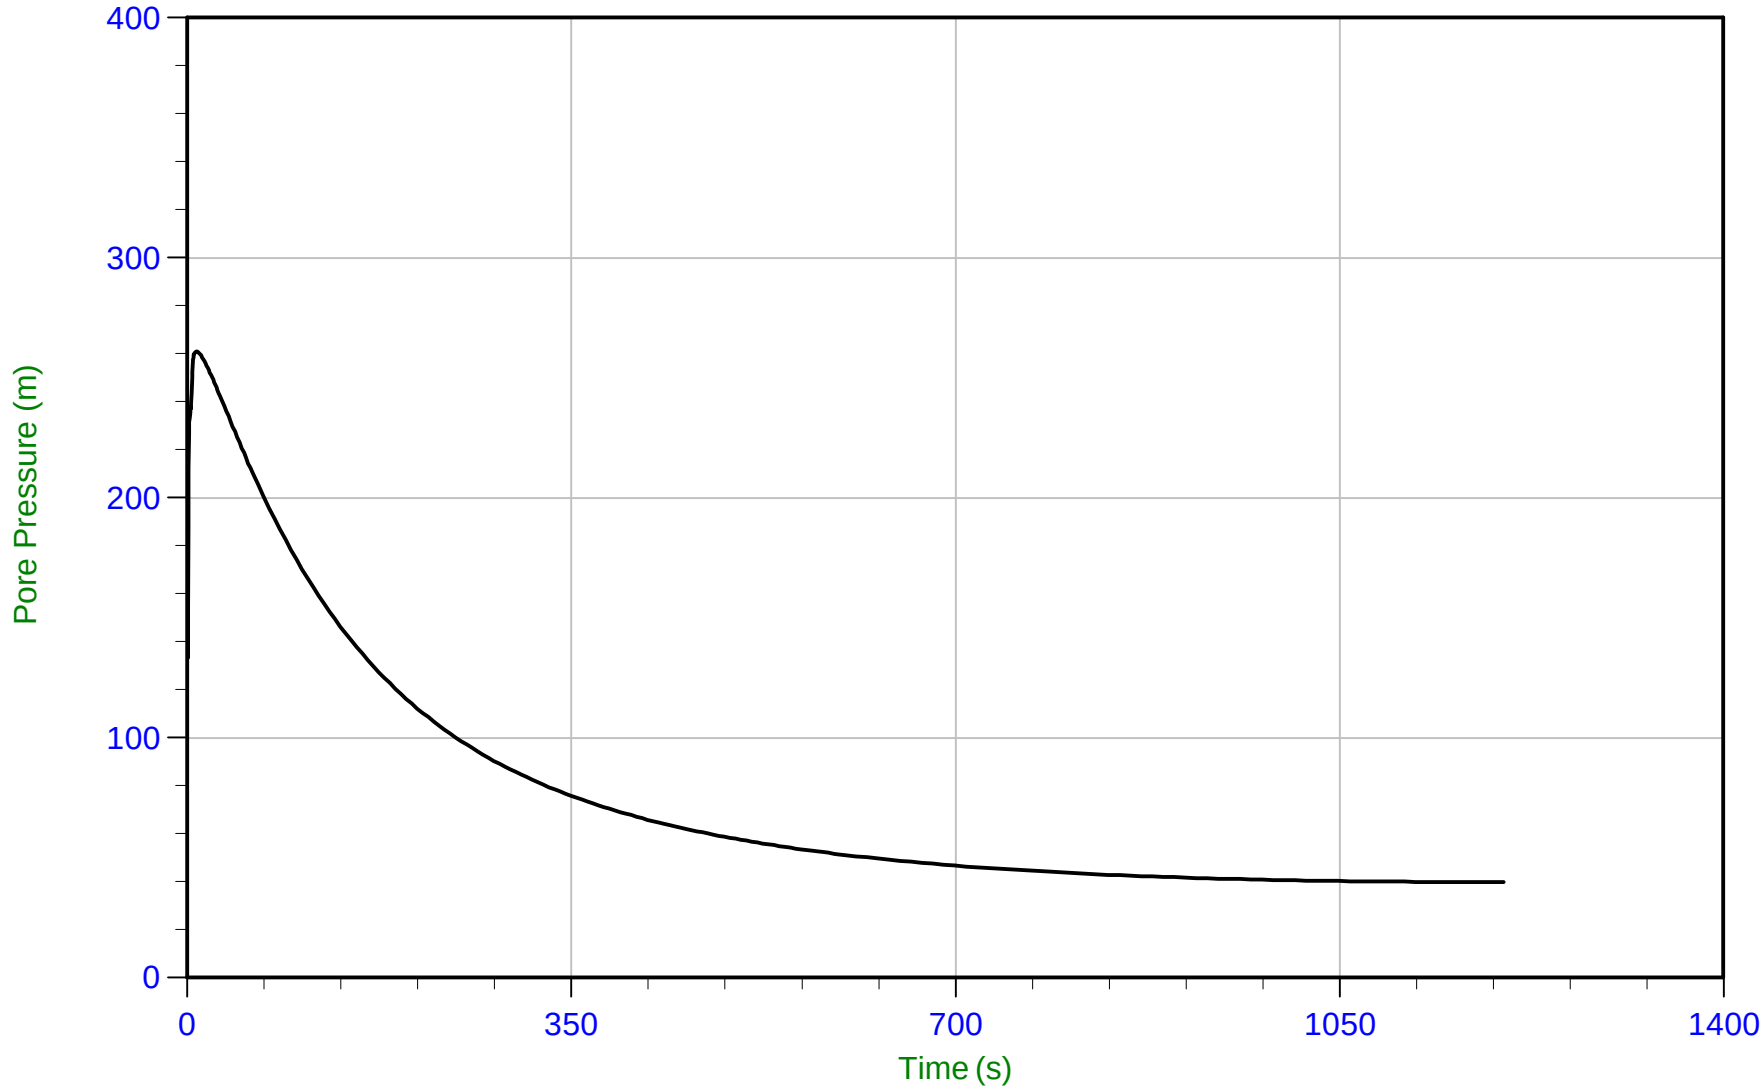

Trace Summary:

Filename: 22-02-23796_RP22-22CPT232.PPF
Depth: 8.400 m / 27.559 ft
Duration: 1200.0 s


u Min: 39.8 m
u Max: 261.0 m
u Final: 39.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 12:15
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT233
Cone: 854:T1500F15U35 Area=15 cm²

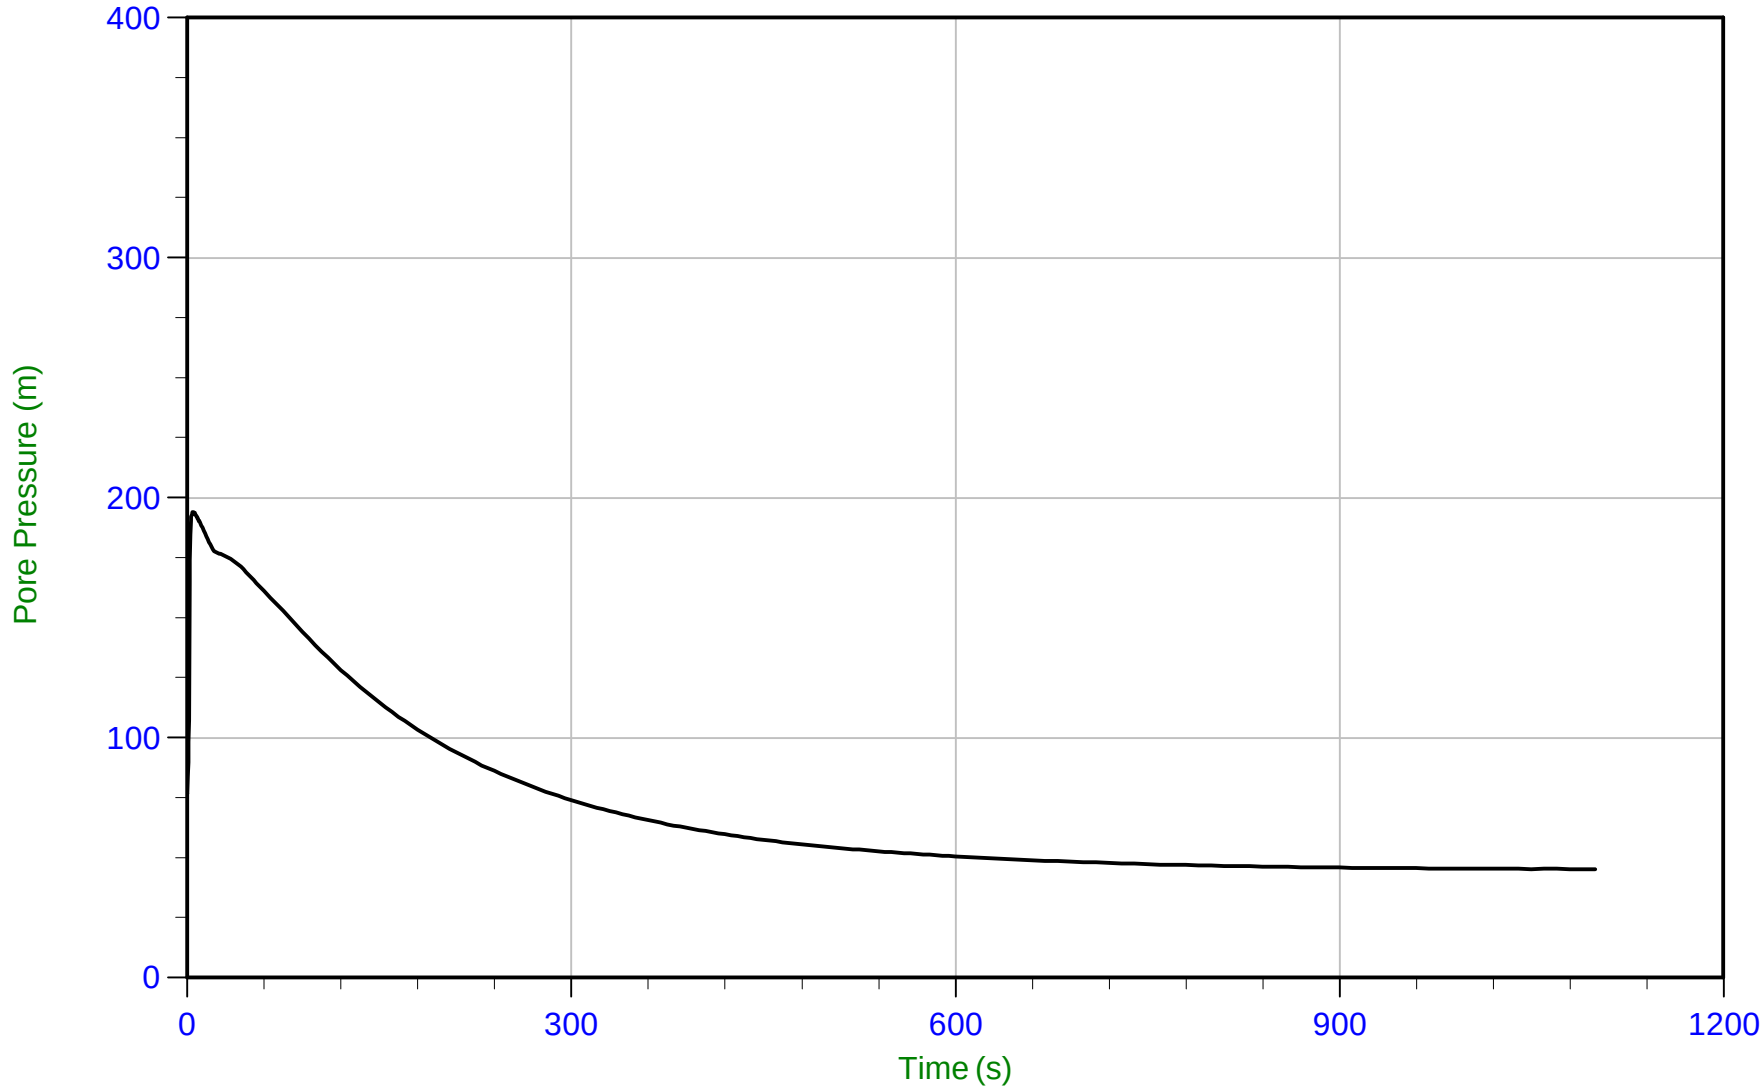

Trace Summary:

Filename: 22-02-23796_RS22-22CPT233.PPF
Depth: 5.925 m / 19.439 ft
Duration: 1100.0 s

u Min: 45.3 m
u Max: 194.1 m
u Final: 45.3 m


WT: 2.000 m / 6.562 ft
Ueq: 3.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 13:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT234
Cone: 854:T1500F15U35 Area=15 cm²

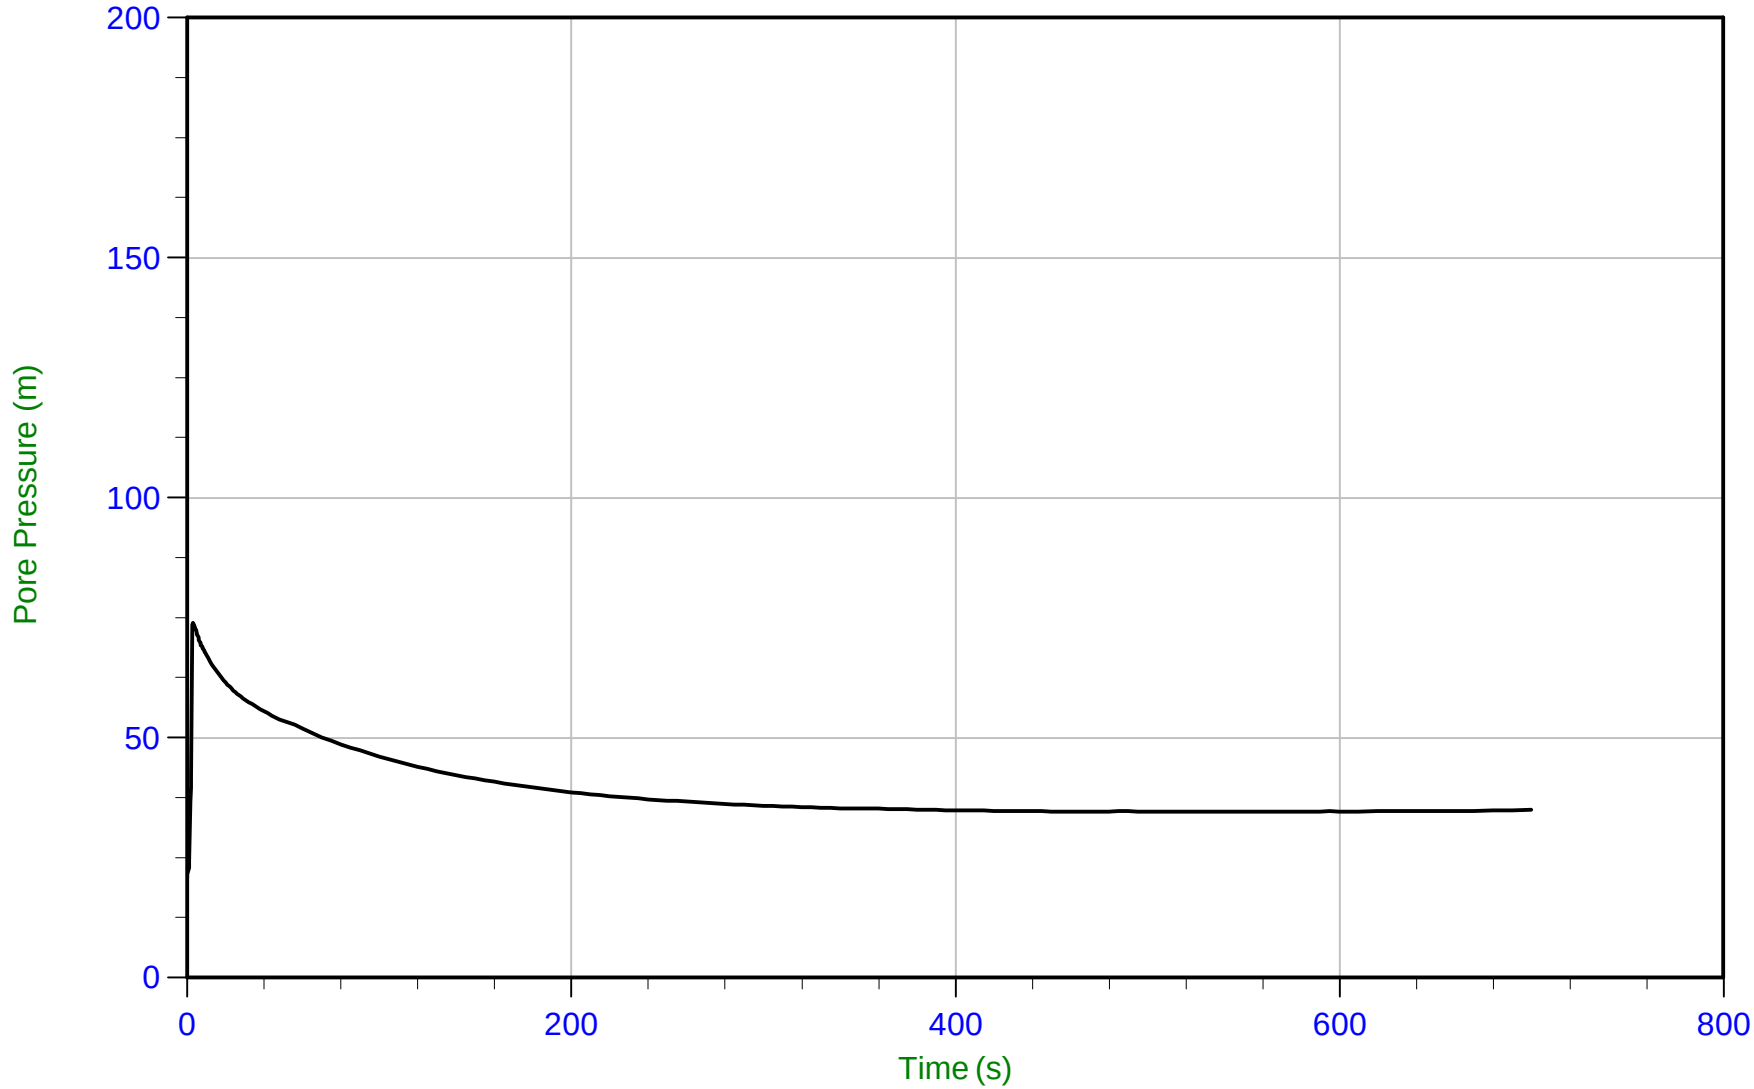

Trace Summary:

Filename: 22-02-23796_RP22-22CPT234.PPF
Depth: 3.925 m / 12.877 ft
Duration: 700.0 s


u Min: 21.0 m
u Max: 74.0 m
u Final: 35.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 13:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT234
Cone: 854:T1500F15U35 Area=15 cm²

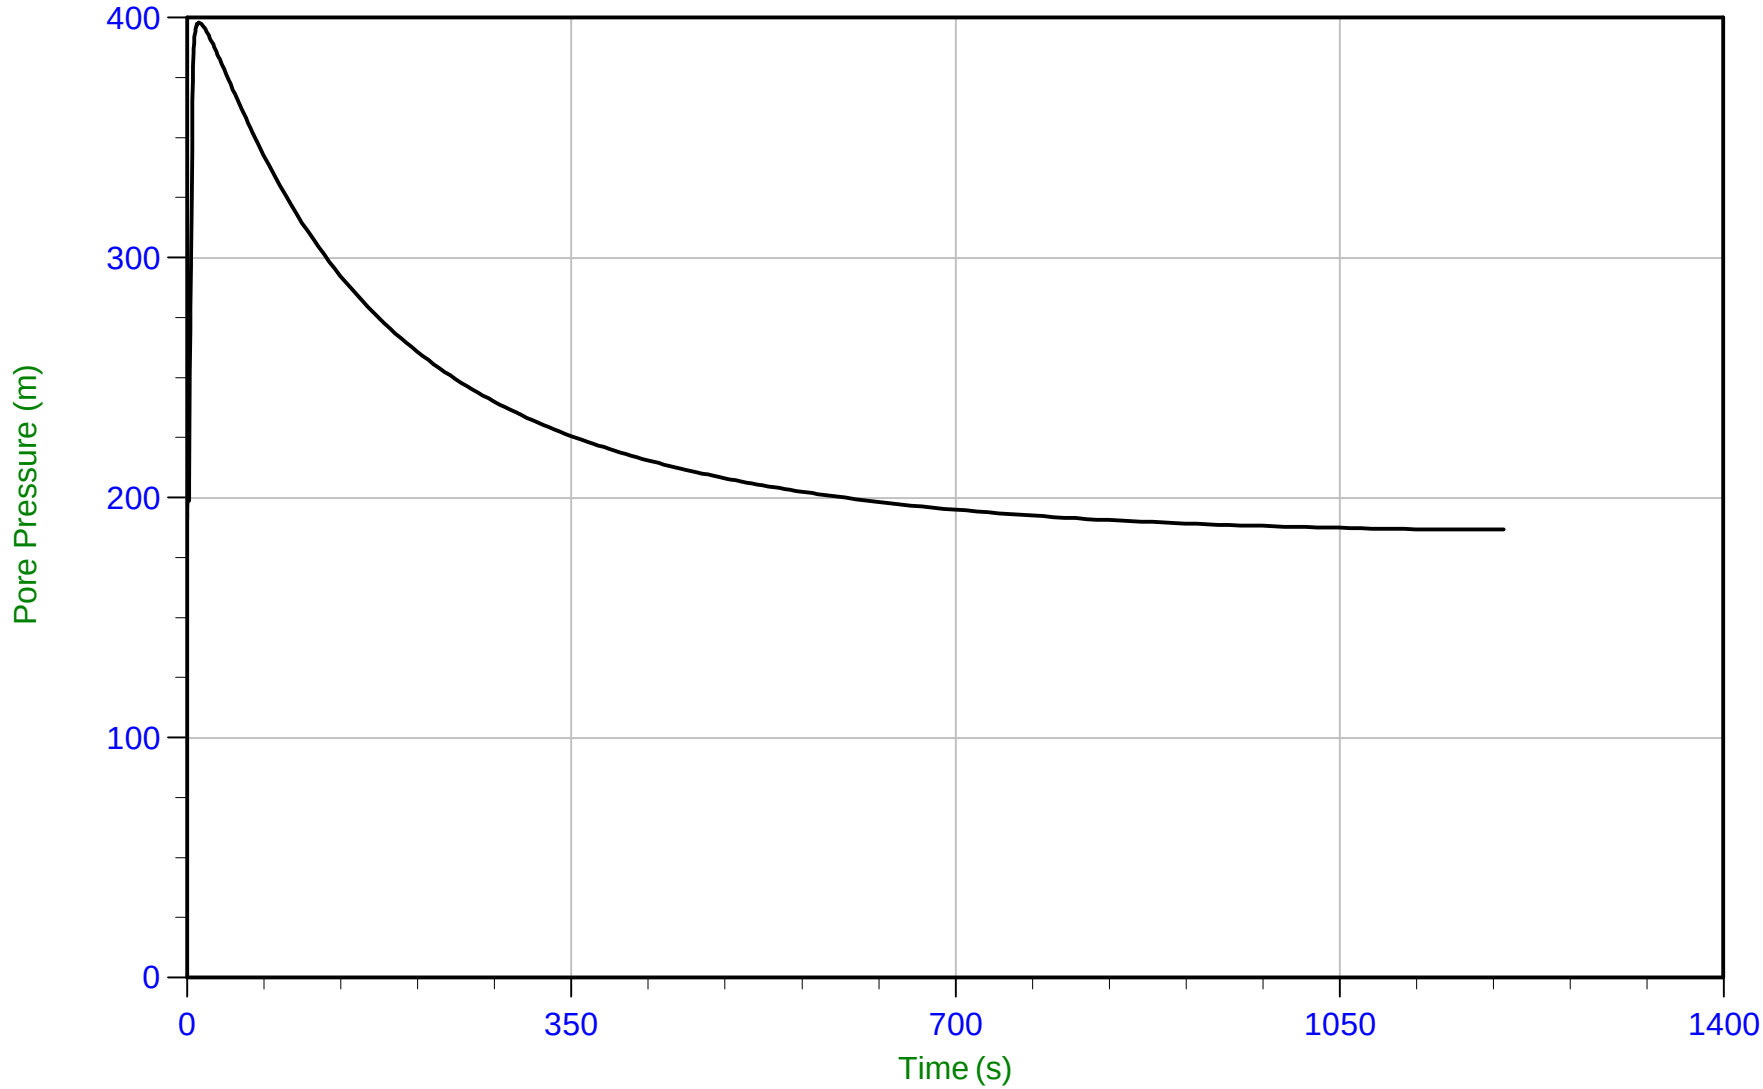

Trace Summary:

Filename: 22-02-23796_RP22-22CPT234.PPF
Depth: 11.150 m / 36.581 ft
Duration: 1200.0 s


u Min: 186.7 m
u Max: 397.9 m
u Final: 186.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 14:42
Site: Brooks, Alberta

Sounding: RCPT22-22CPT235
Cone: 854:T1500F15U35 Area=15 cm²

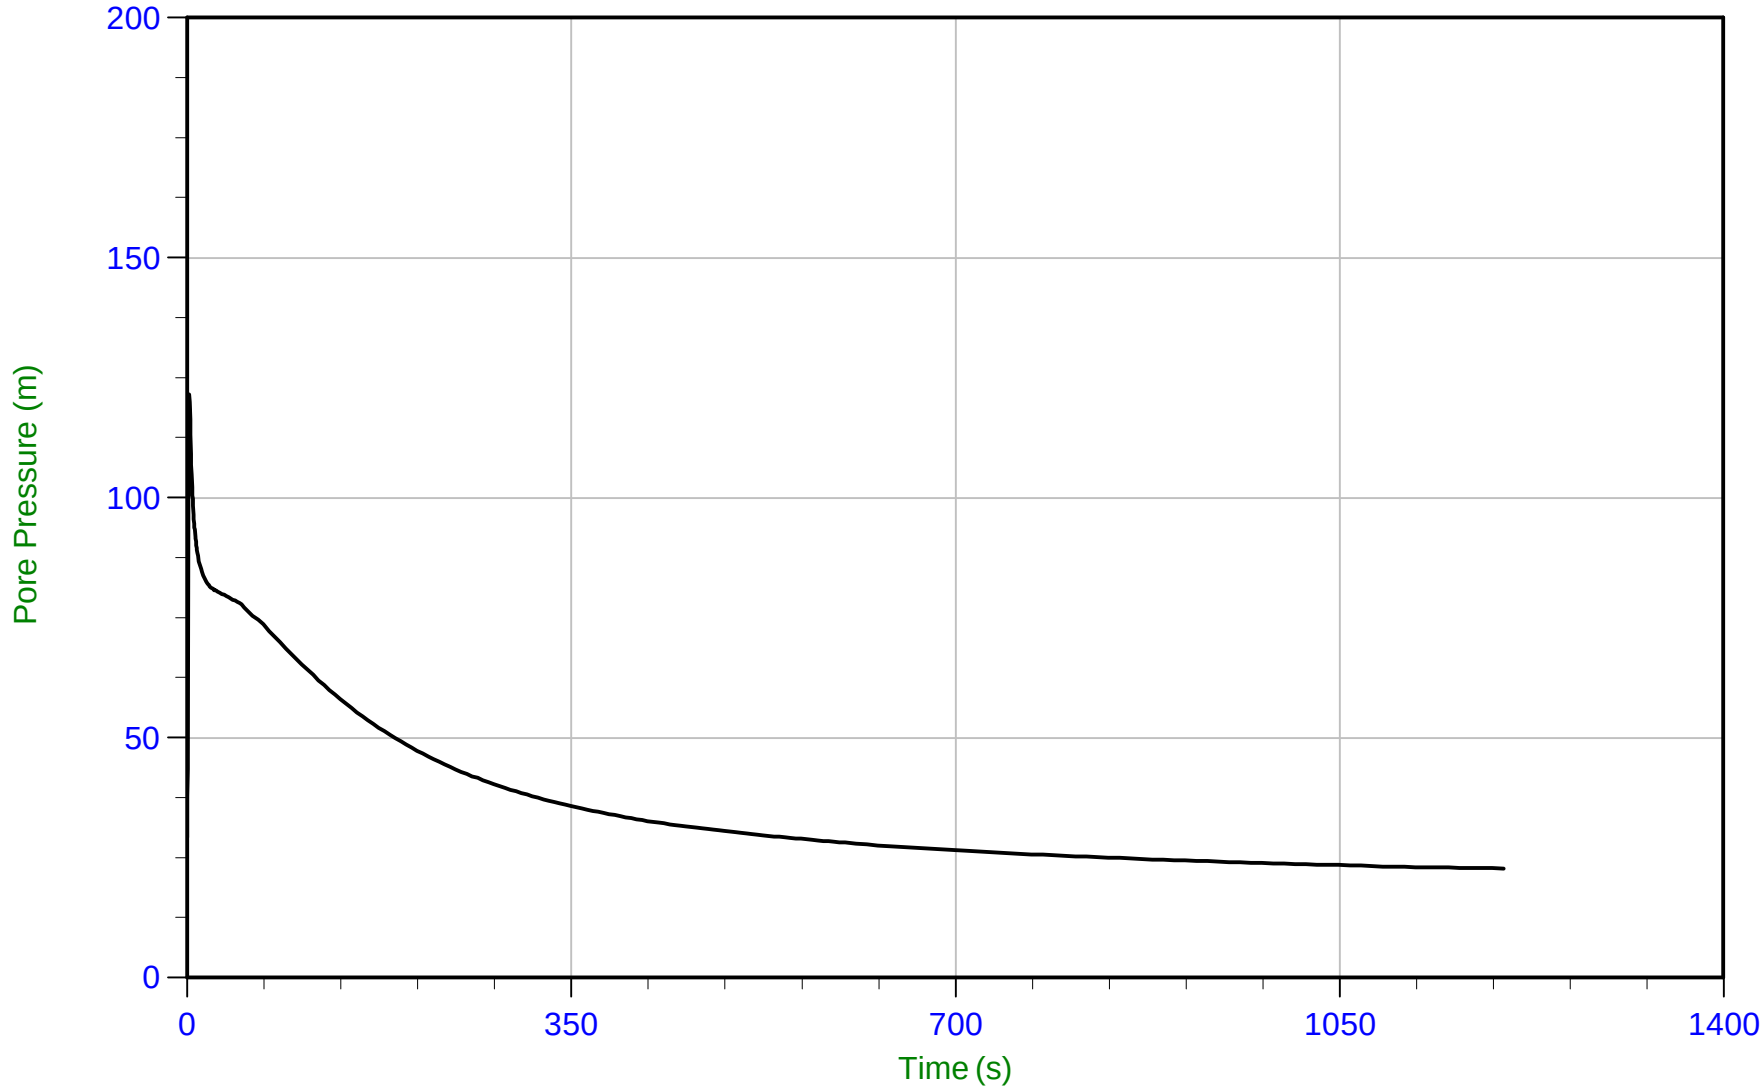

Trace Summary:

Filename: 22-02-23796_RP22-22CPT235.PPF
Depth: 3.850 m / 12.631 ft
Duration: 1200.0 s


u Min: 22.7 m
u Max: 121.6 m
u Final: 22.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 15:41
Site: Brooks, Alberta

Sounding: RCPT22-22CPT236
Cone: 854:T1500F15U35 Area=15 cm²

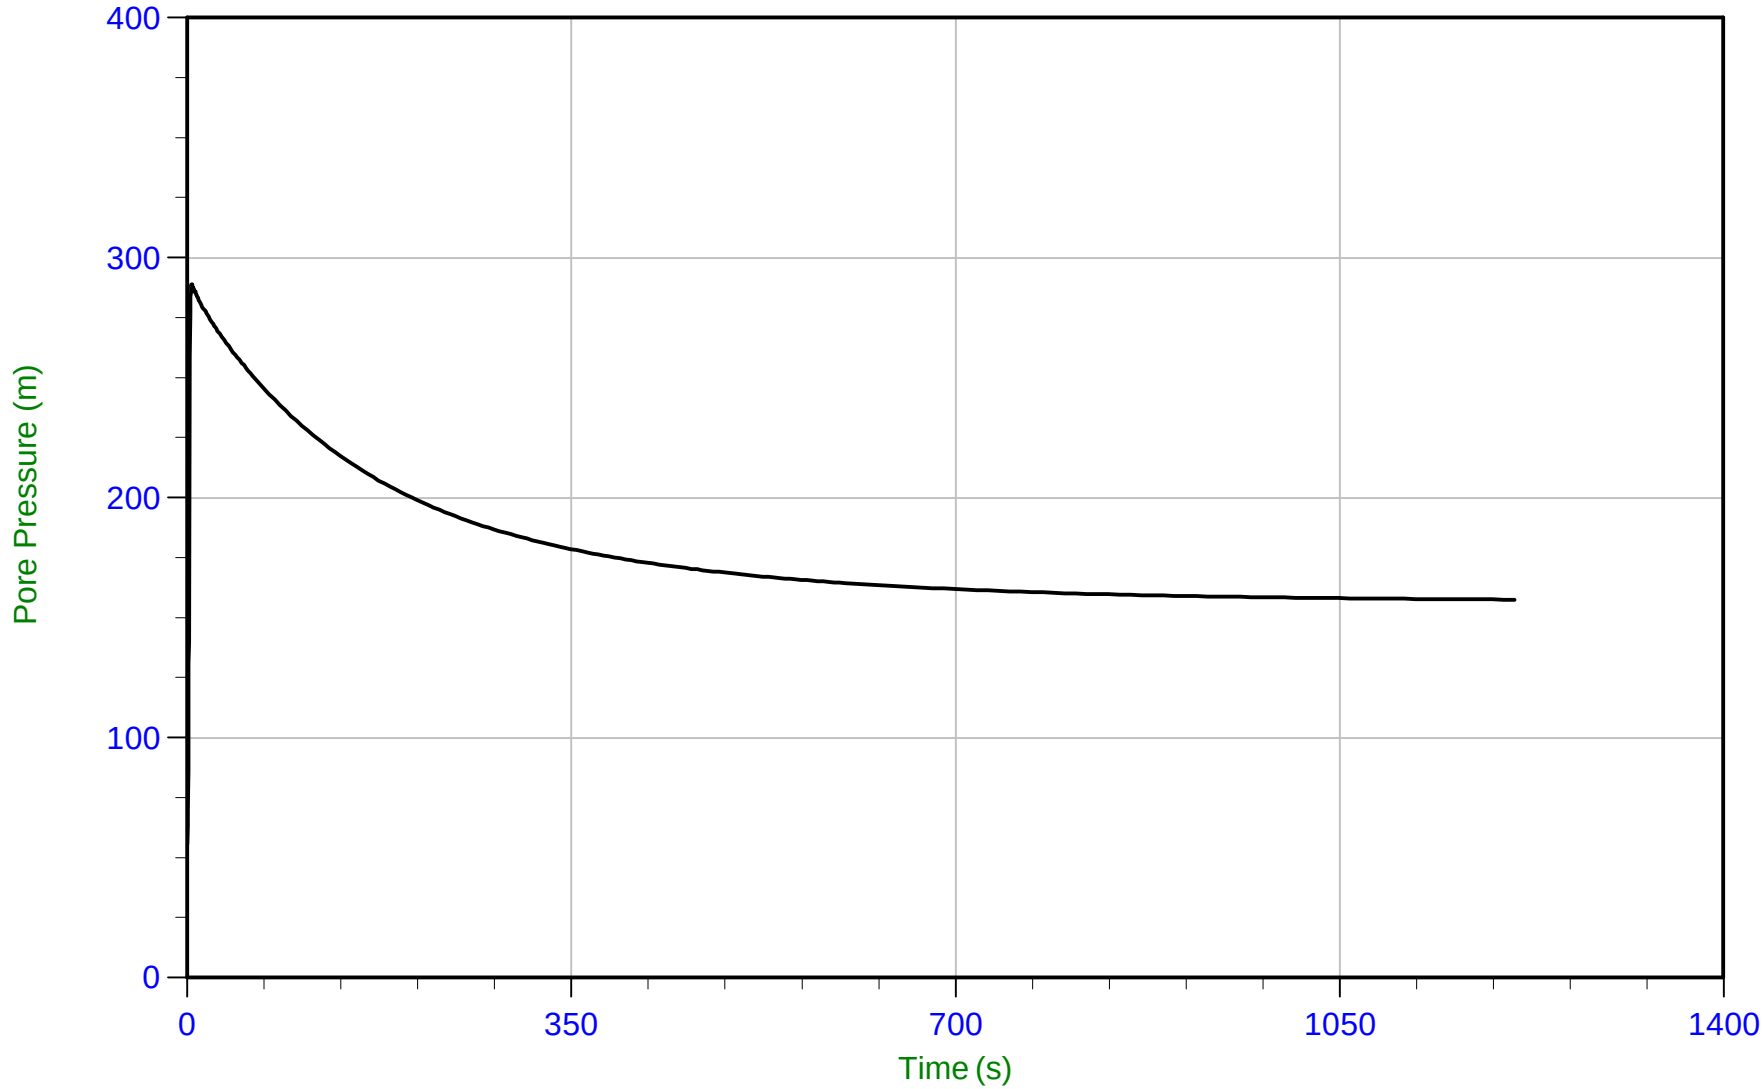

Trace Summary:

Filename: 22-02-23796_RP22-22CPT236.PPF
Depth: 5.900 m / 19.357 ft
Duration: 1210.0 s


u Min: 55.6 m
u Max: 288.9 m
u Final: 157.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/26/2022 16:37
Site: Brooks, Alberta

Sounding: RCPT22-22CPT237
Cone: 854:T1500F15U35 Area=15 cm²

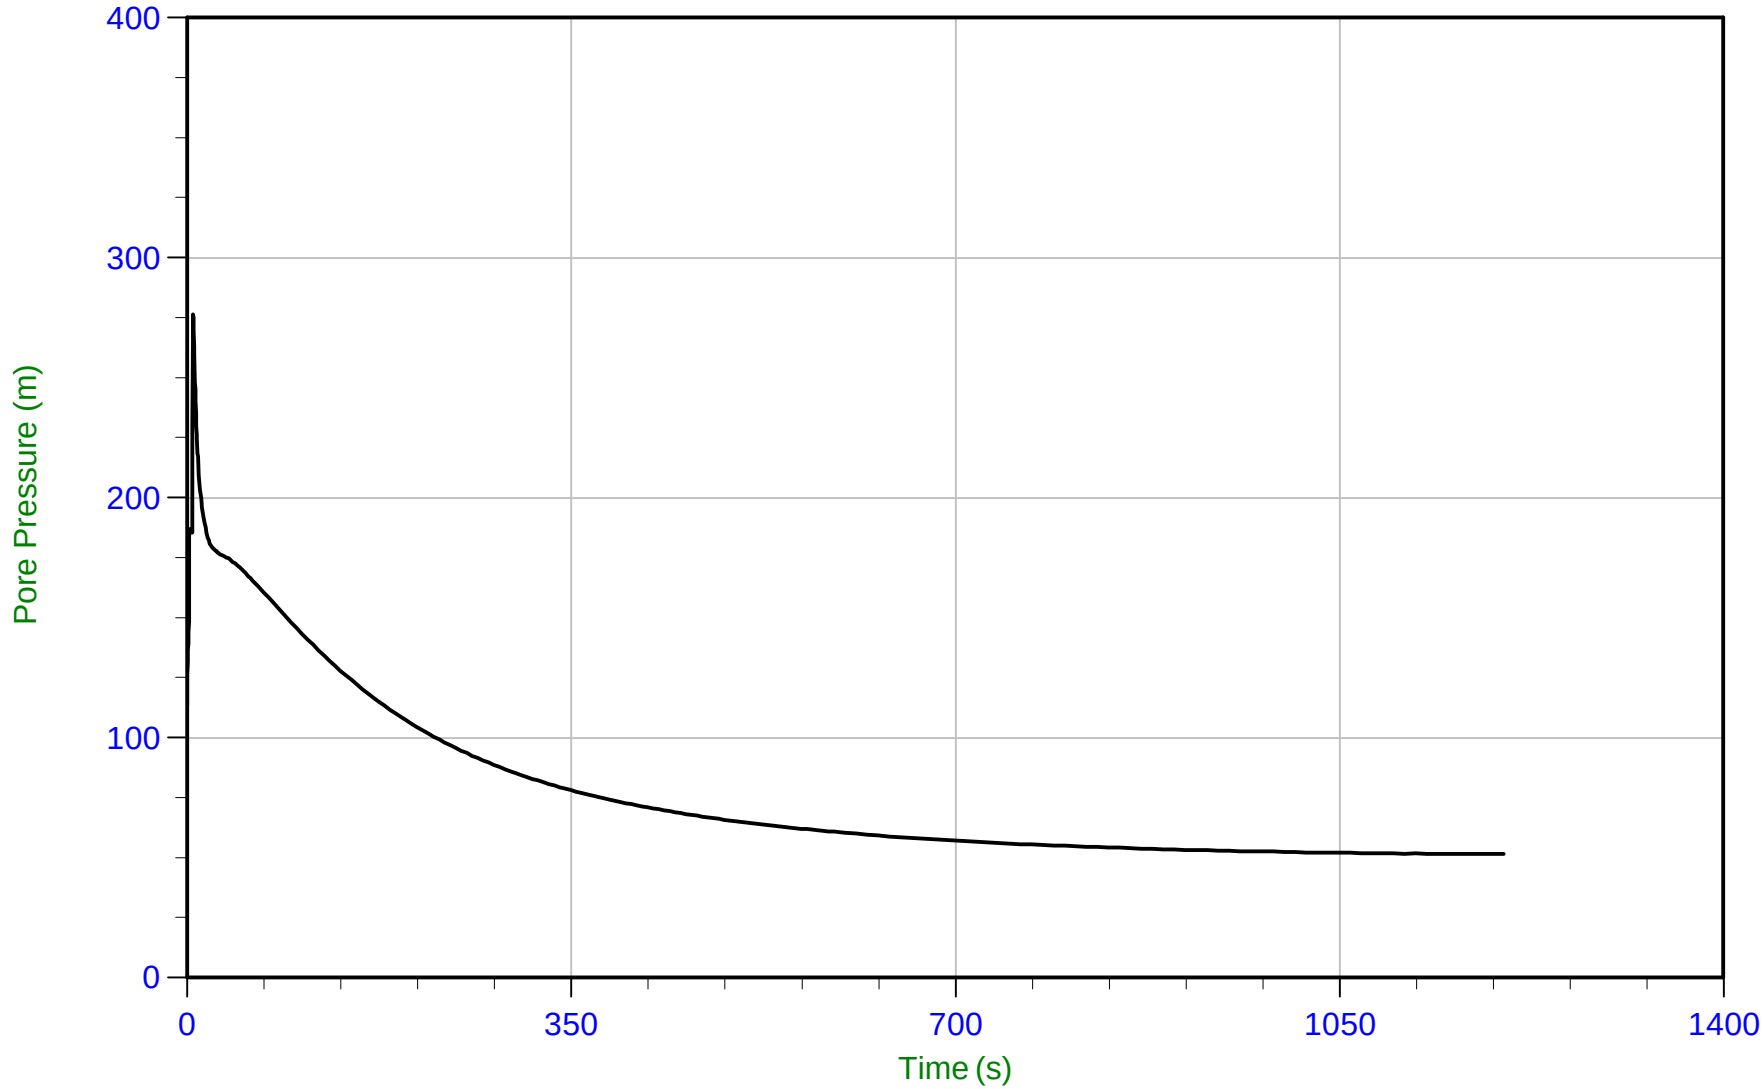

Trace Summary:

Filename: 22-02-23796_RP22-22CPT237.PPF
Depth: 5.550 m / 18.208 ft
Duration: 1200.0 s


u Min: 51.5 m
u Max: 276.5 m
u Final: 51.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 07:15
Site: Brooks, Alberta

Sounding: RCPT22-22CPT238
Cone: 854:T1500F15U35 Area=15 cm²

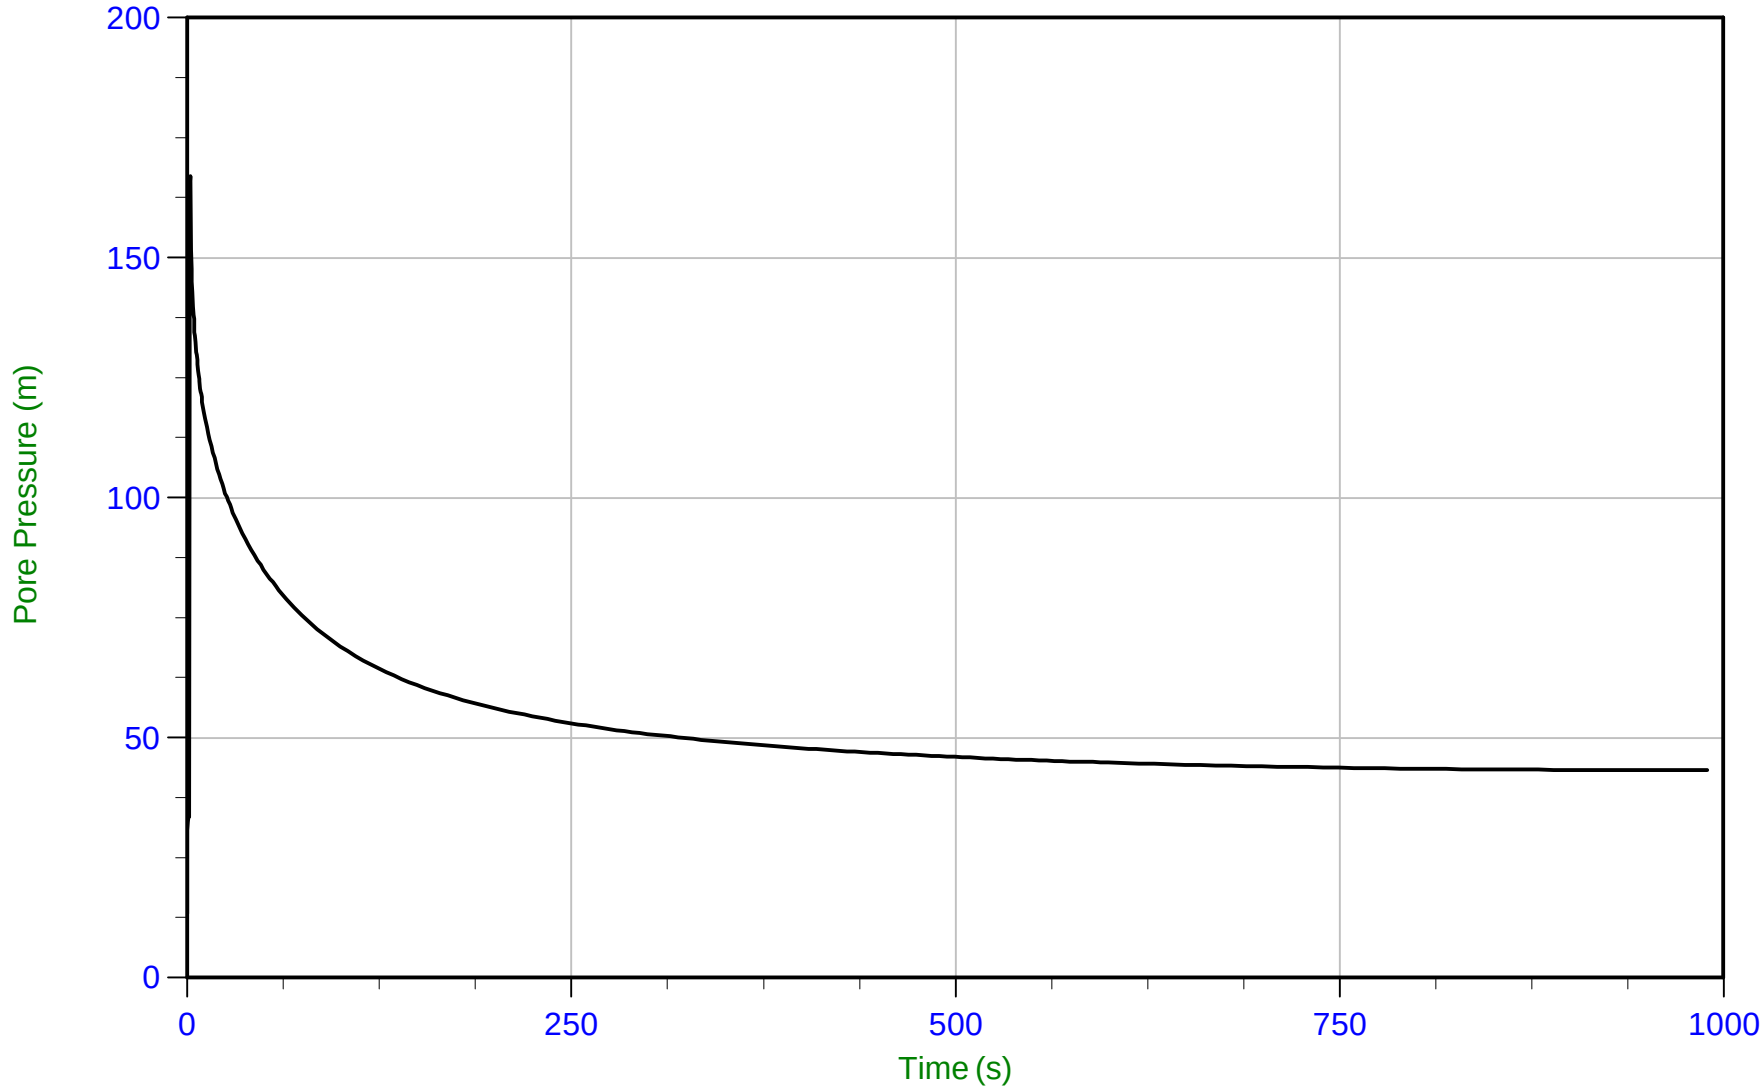

Trace Summary:

Filename: 22-02-23796_RP22-22CPT238.PPF
Depth: 3.875 m / 12.713 ft
Duration: 990.0 s

u Min: 13.4 m
u Max: 167.0 m
u Final: 43.2 m


WT: 3.200 m / 10.499 ft
Ueq: 0.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 07:15
Site: Brooks, Alberta

Sounding: RCPT22-22CPT238
Cone: 854:T1500F15U35 Area=15 cm²

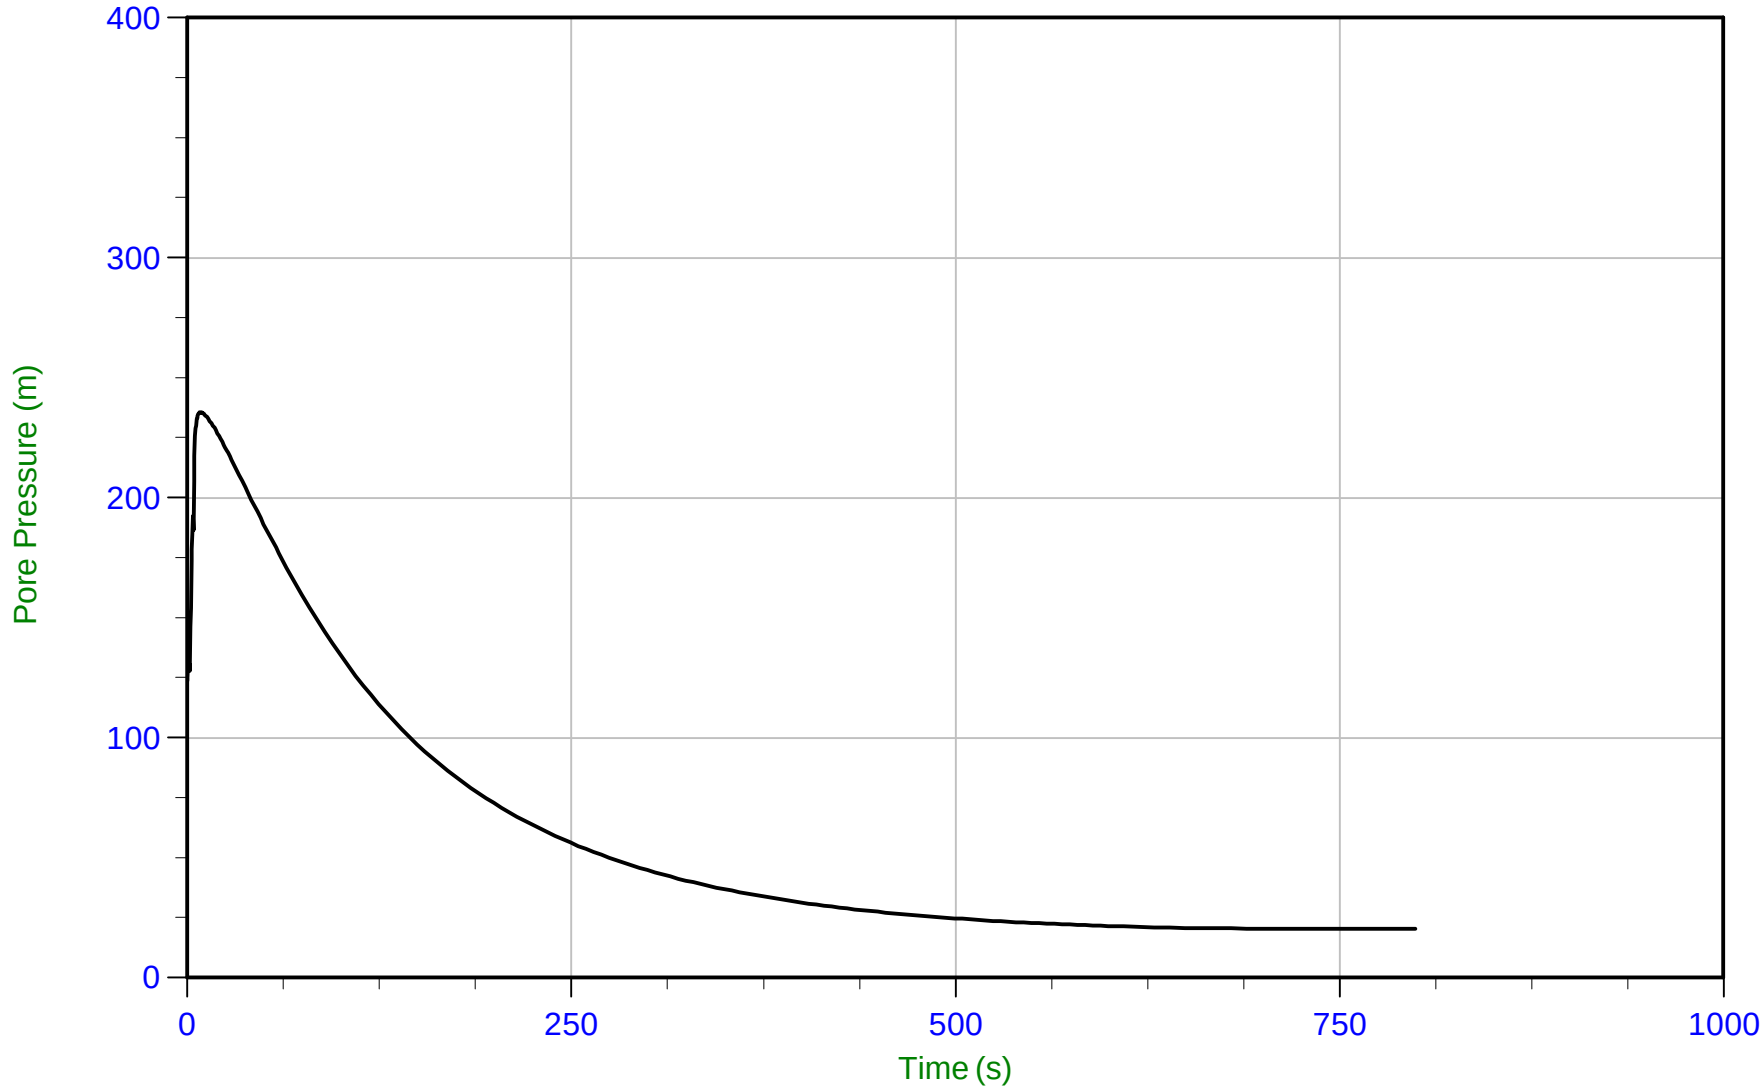

Trace Summary:

Filename: 22-02-23796_RP22-22CPT238.PPF
Depth: 9.875 m / 32.398 ft
Duration: 800.0 s

u Min: 20.3 m
u Max: 235.6 m
u Final: 20.5 m


WT: 3.200 m / 10.499 ft
Ueq: 6.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 08:41
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT239
Cone: 854:T1500F15U35 Area=15 cm²

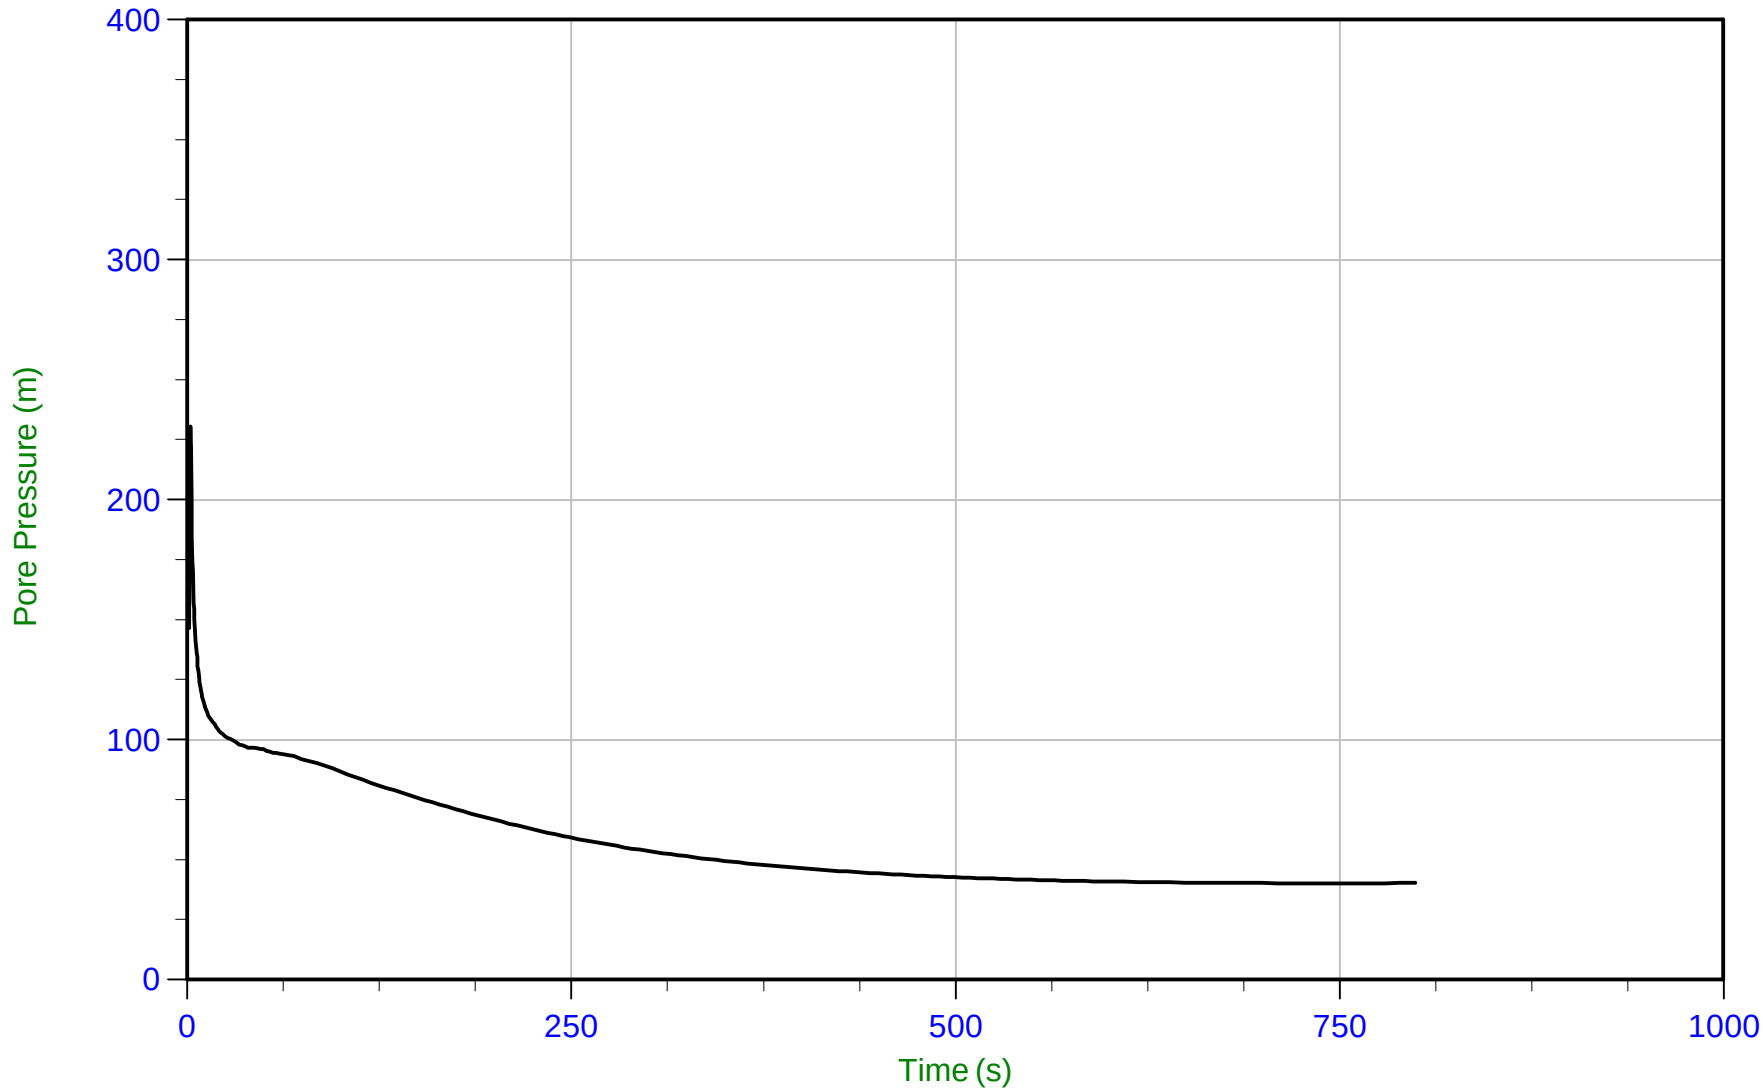

Trace Summary:

Filename: 22-02-23796_RS22-22CPT239.PPF
Depth: 5.925 m / 19.439 ft
Duration: 800.0 s

u Min: 40.2 m
u Max: 230.4 m
u Final: 40.3 m


WT: 4.000 m / 13.123 ft
Ueq: 1.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 08:41
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT239
Cone: 854:T1500F15U35 Area=15 cm²

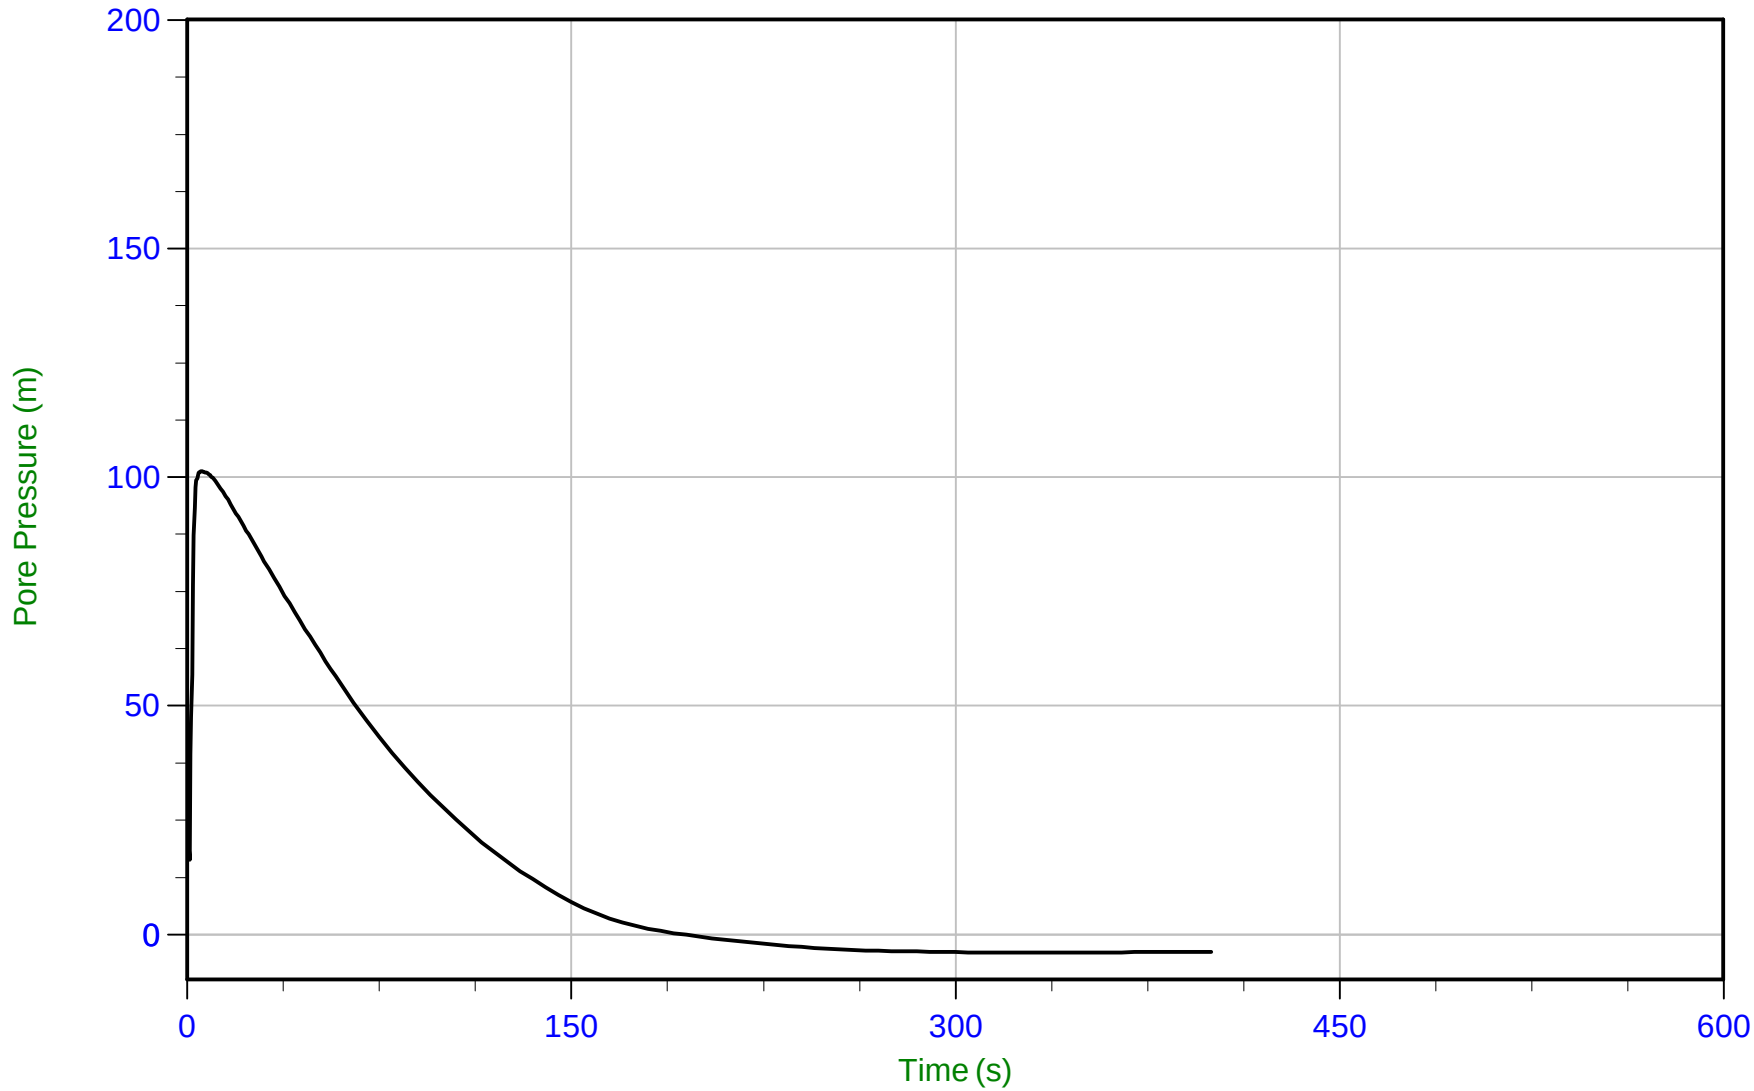

Trace Summary:

Filename: 22-02-23796_RS22-22CPT239.PPF
Depth: 9.900 m / 32.480 ft
Duration: 400.0 s


u Min: -4.0 m
u Max: 101.2 m
u Final: -3.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 09:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT240
Cone: 854:T1500F15U35 Area=15 cm²

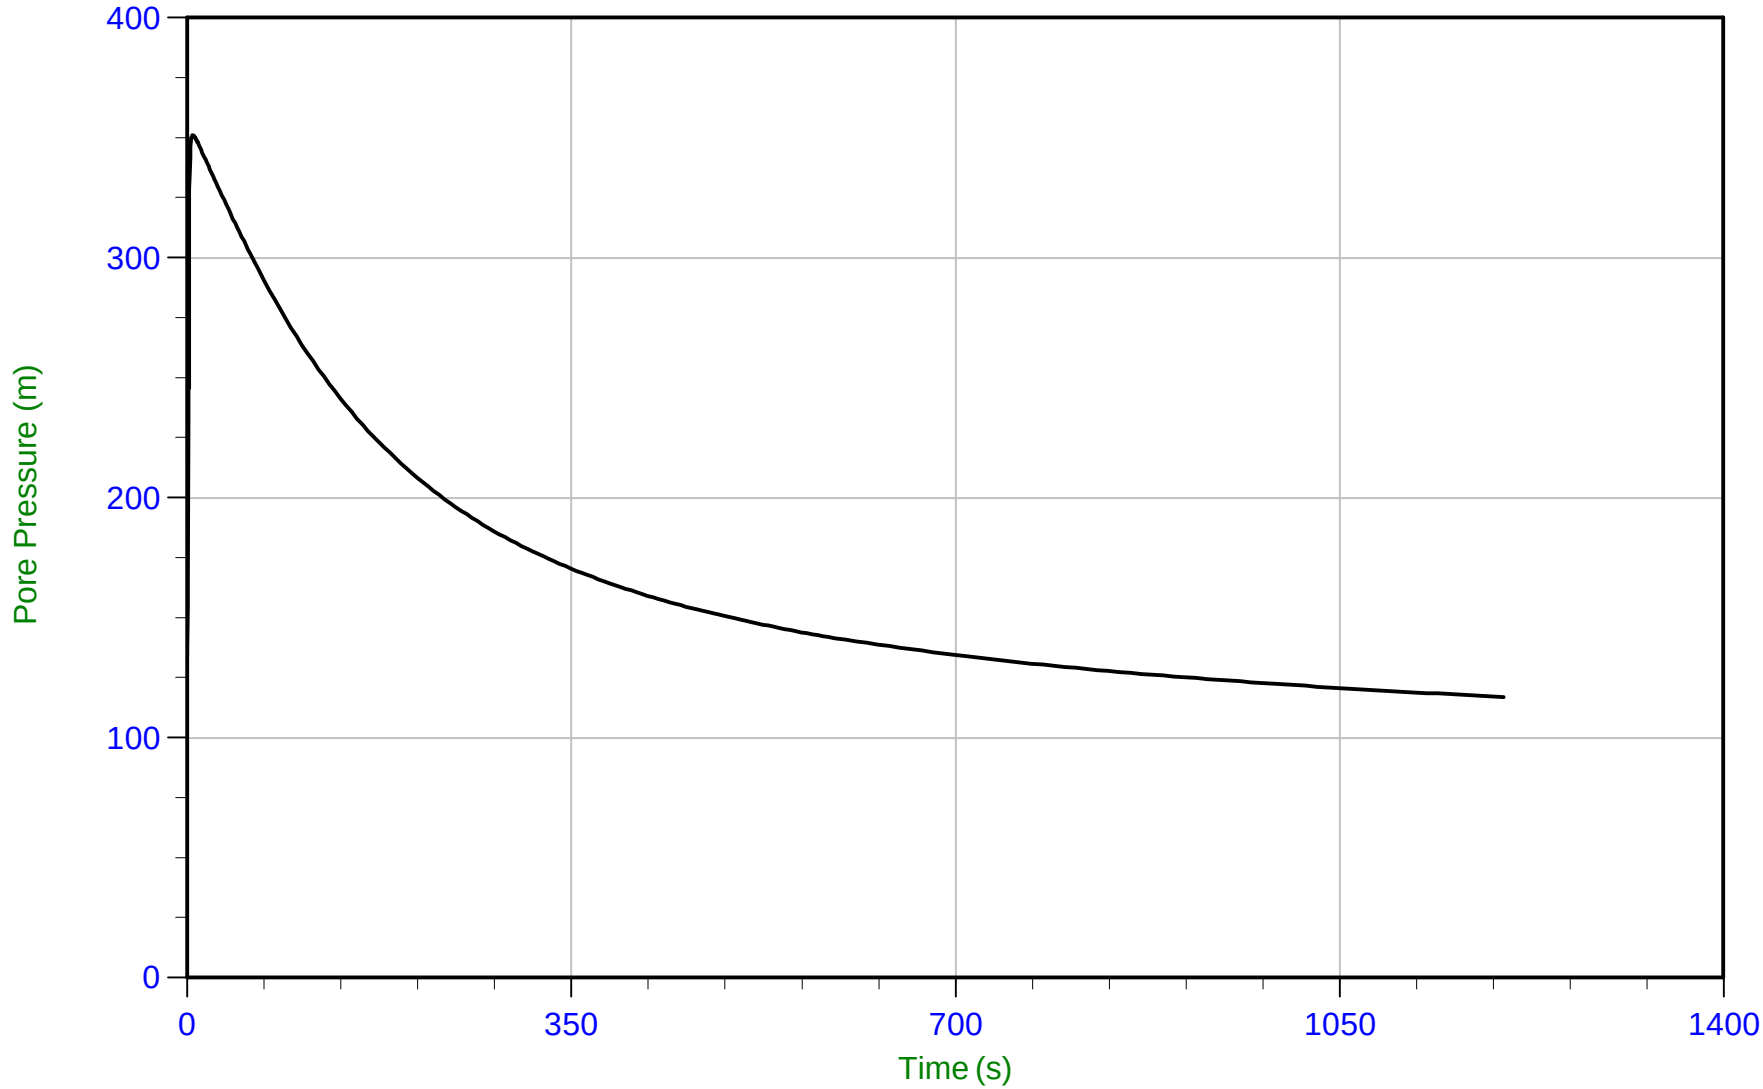

Trace Summary:

Filename: 22-02-23796_RP22-22CPT240.PPF
Depth: 5.975 m / 19.603 ft
Duration: 1200.0 s


u Min: 117.0 m
u Max: 351.0 m
u Final: 117.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 09:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT240
Cone: 854:T1500F15U35 Area=15 cm²

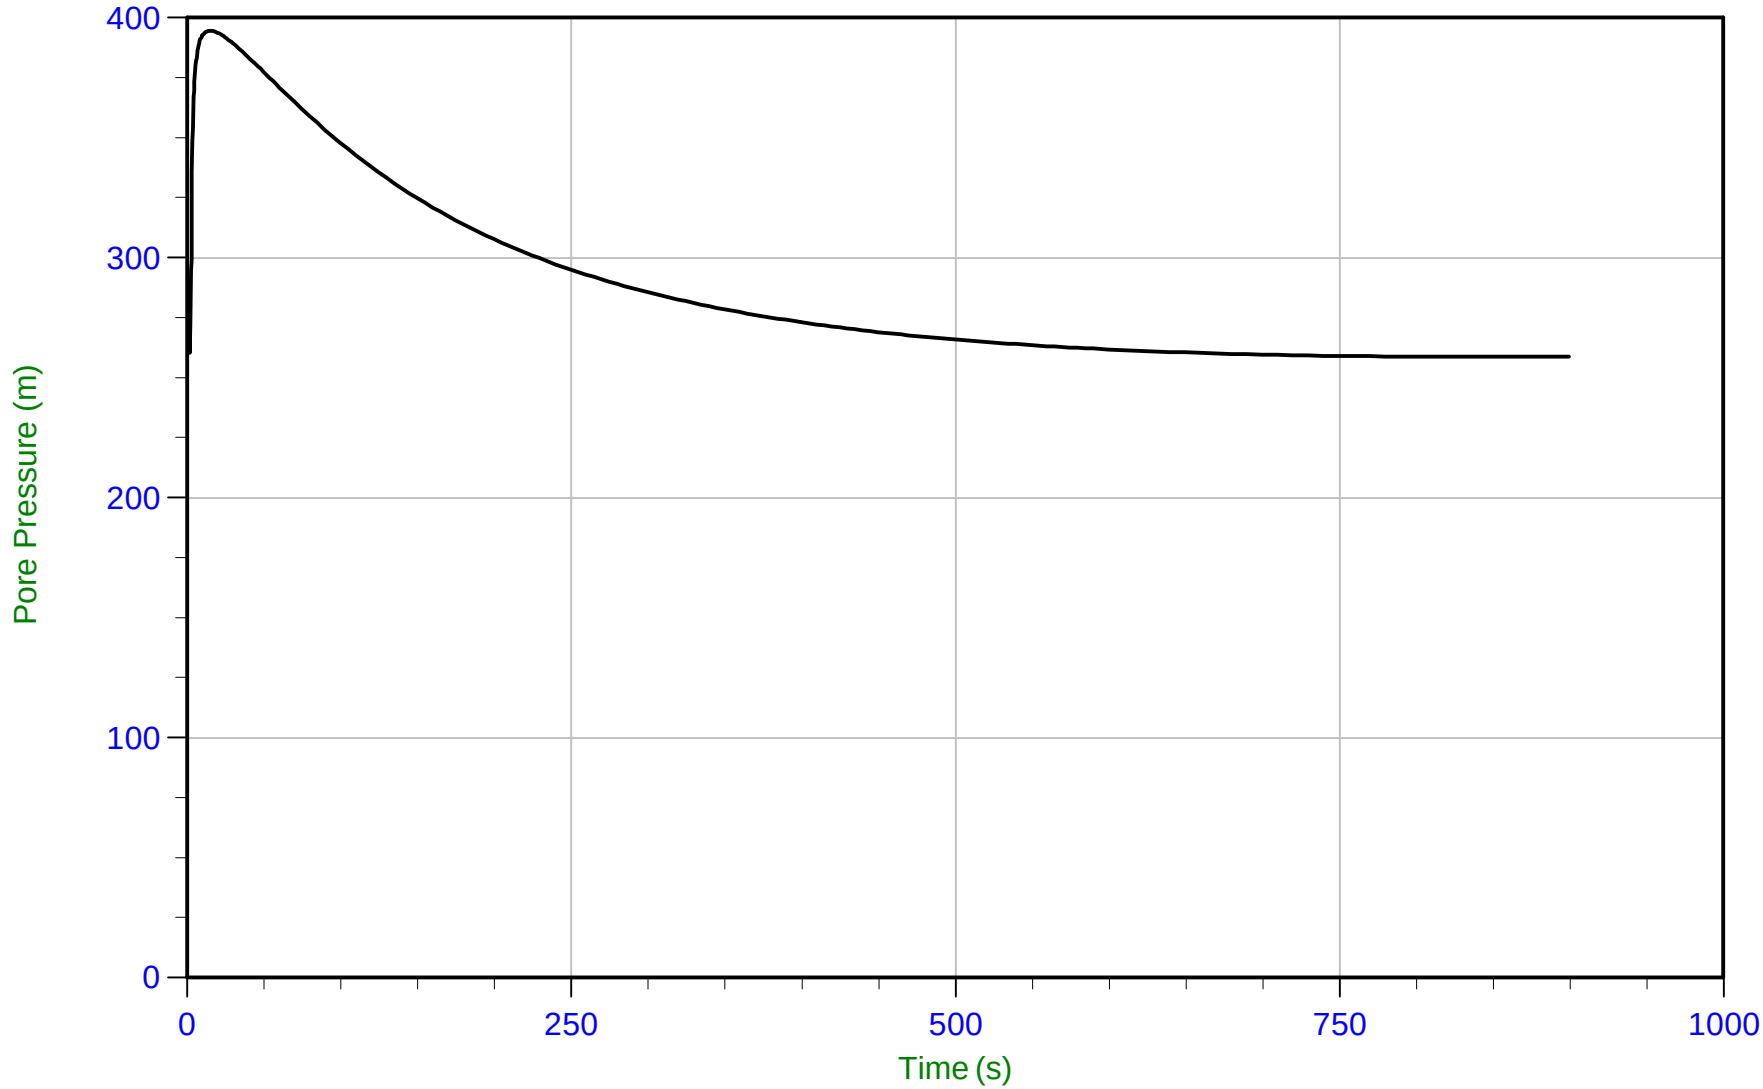

Trace Summary:

Filename: 22-02-23796_RP22-22CPT240.PPF
Depth: 11.950 m / 39.206 ft
Duration: 900.0 s

u Min: 258.7 m
u Max: 394.6 m
u Final: 258.8 m


WT: 3.200 m / 10.499 ft
Ueq: 8.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 11:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT241
Cone: 854:T1500F15U35 Area=15 cm²

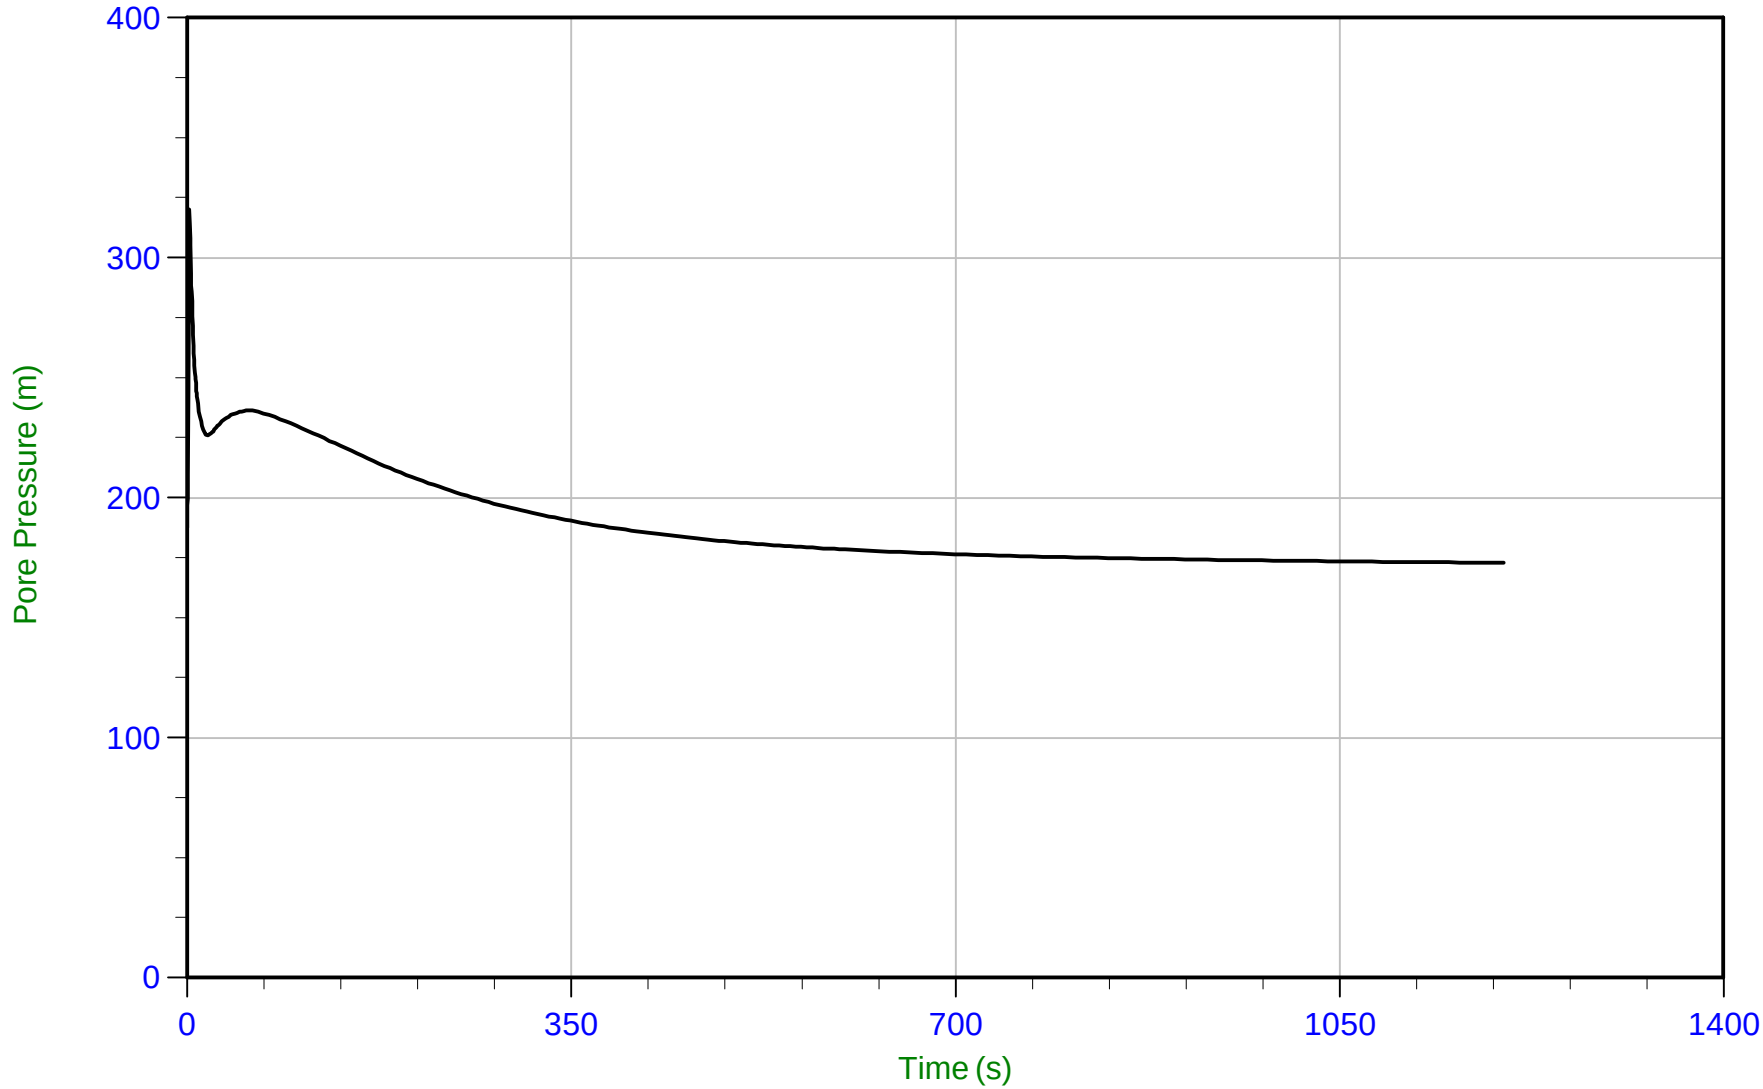

Trace Summary:

Filename: 22-02-23796_RP22-22CPT241.PPF
Depth: 5.850 m / 19.193 ft
Duration: 1200.0 s

u Min: 172.9 m
u Max: 320.3 m
u Final: 172.9 m


WT: 4.000 m / 13.123 ft
Ueq: 1.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 12:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT242
Cone: 854:T1500F15U35 Area=15 cm²

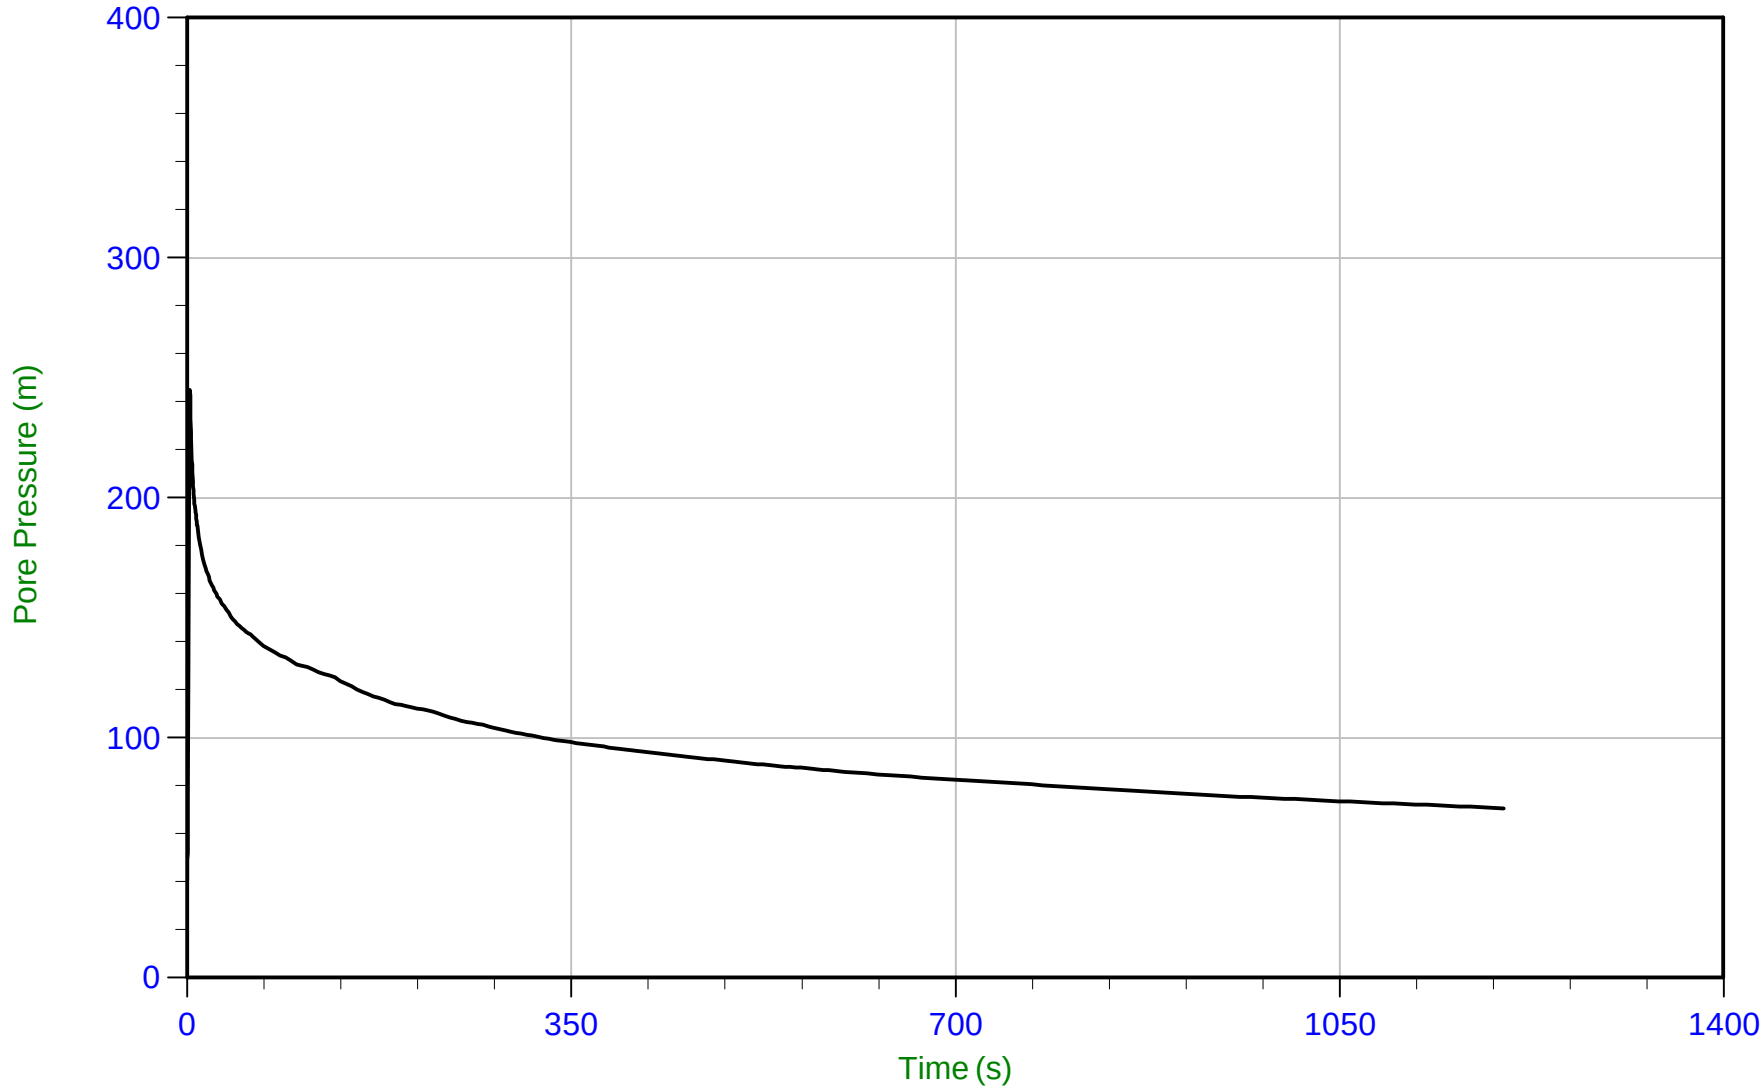

Trace Summary:

Filename: 22-02-23796_RP22-22CPT242.PPF
Depth: 4.825 m / 15.830 ft
Duration: 1200.0 s


u Min: 40.6 m
u Max: 244.8 m
u Final: 70.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 12:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT242
Cone: 854:T1500F15U35 Area=15 cm²

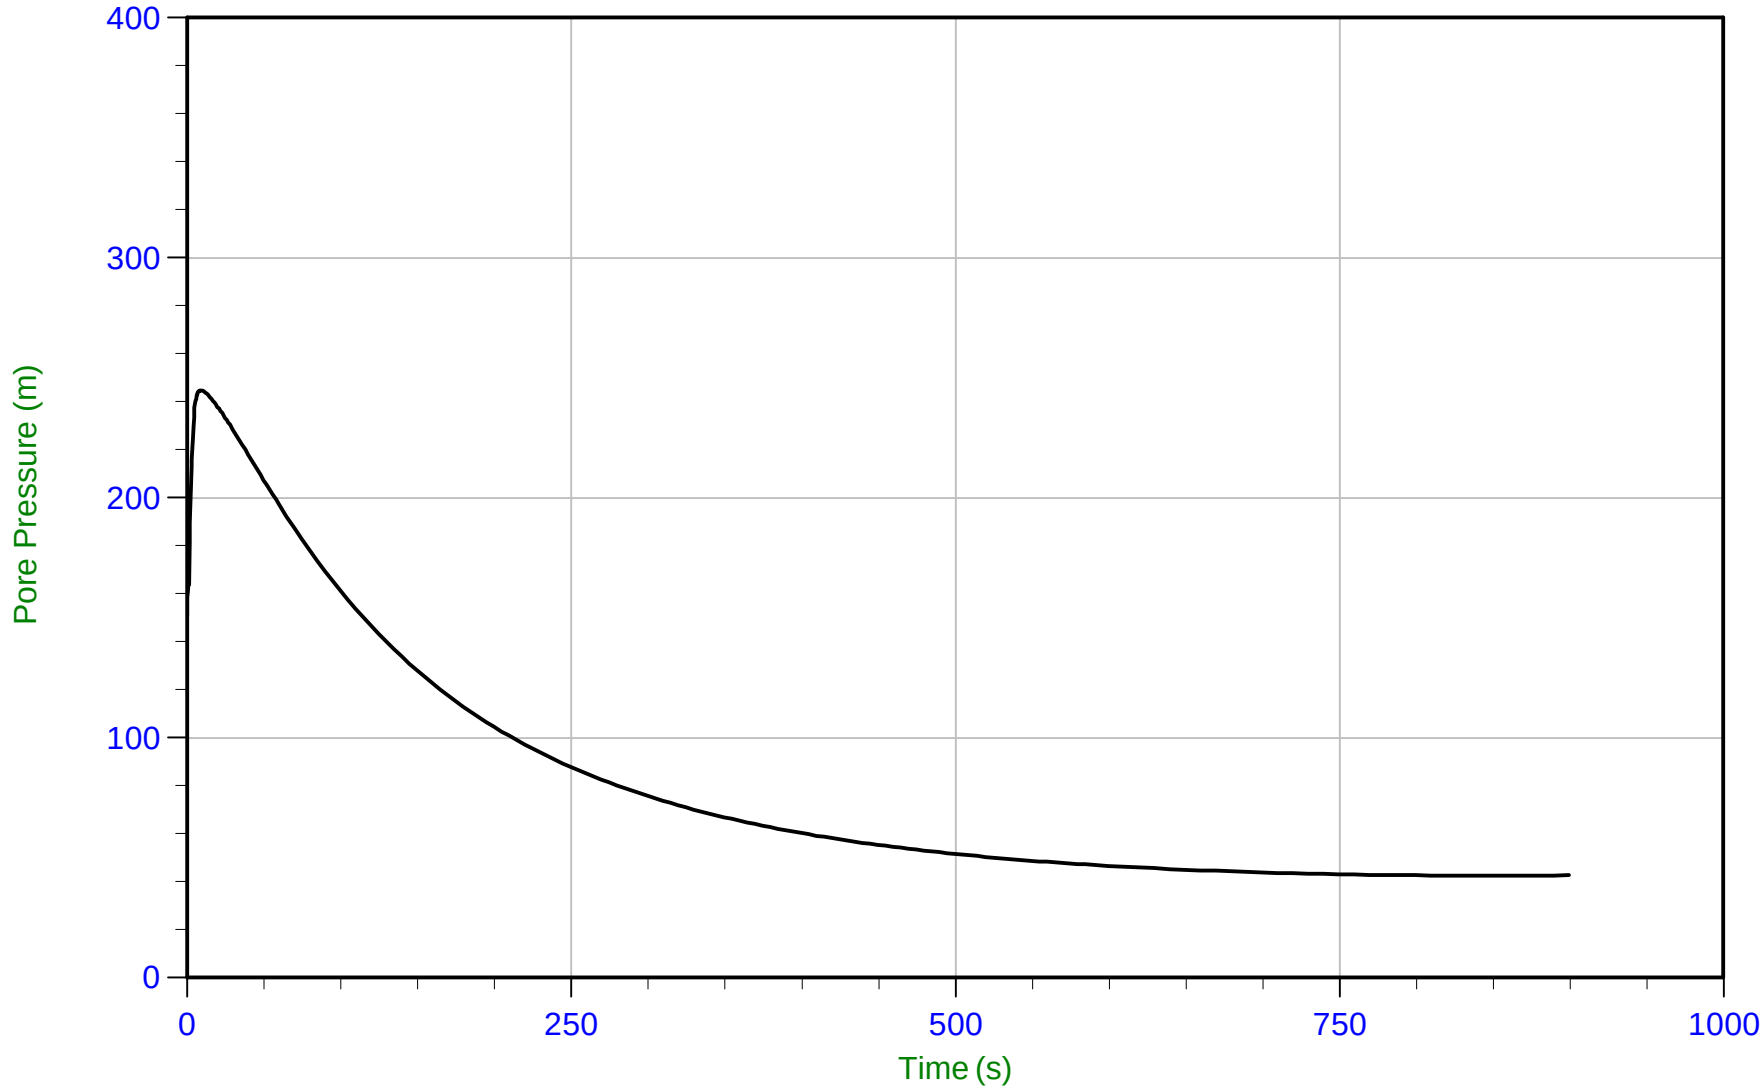

Trace Summary:

Filename: 22-02-23796_RP22-22CPT242.PPF
Depth: 10.925 m / 35.843 ft
Duration: 900.0 s


u Min: 42.5 m
u Max: 244.8 m
u Final: 42.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT243A
Cone: 854:T1500F15U35 Area=15 cm²

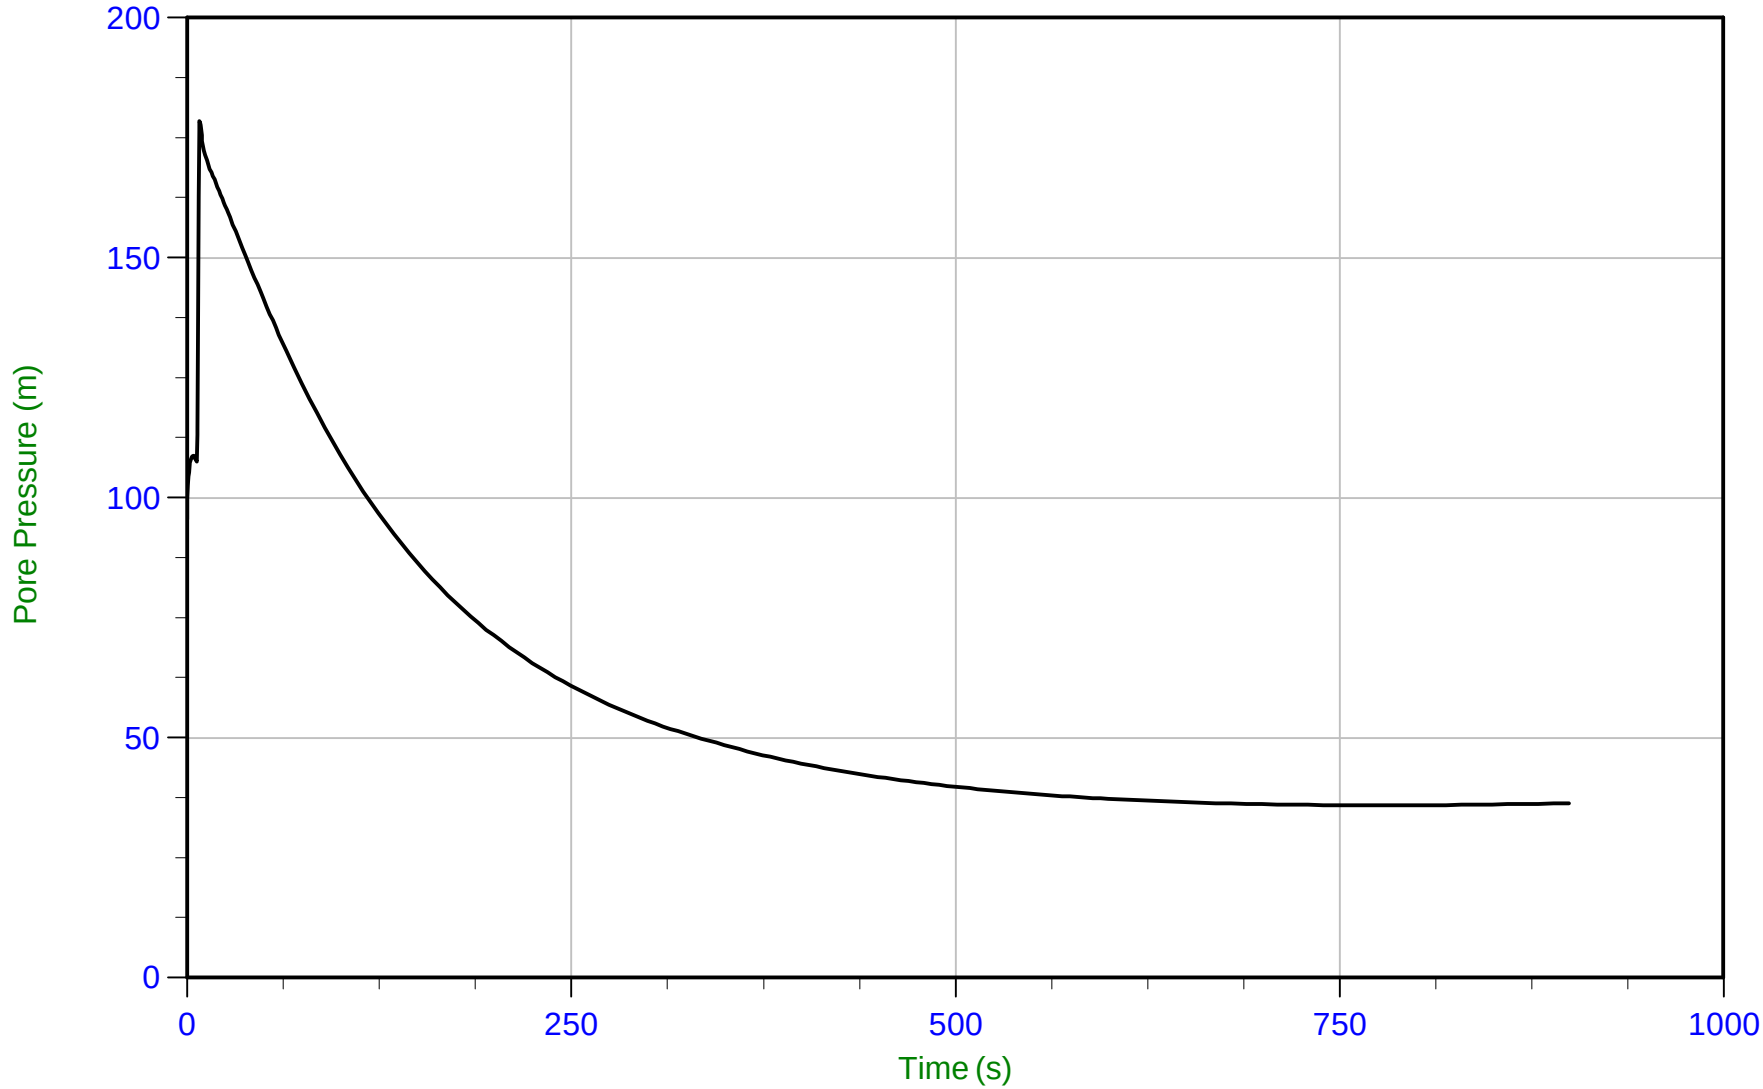

Trace Summary:

Filename: 22-02-23796_RP22-22CPT243A.PPF
Depth: 5.900 m / 19.357 ft
Duration: 900.0 s

u Min: 35.9 m
u Max: 178.5 m
u Final: 36.4 m


WT: 4.000 m / 13.123 ft
Ueq: 1.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 14:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT243A
Cone: 854:T1500F15U35 Area=15 cm²

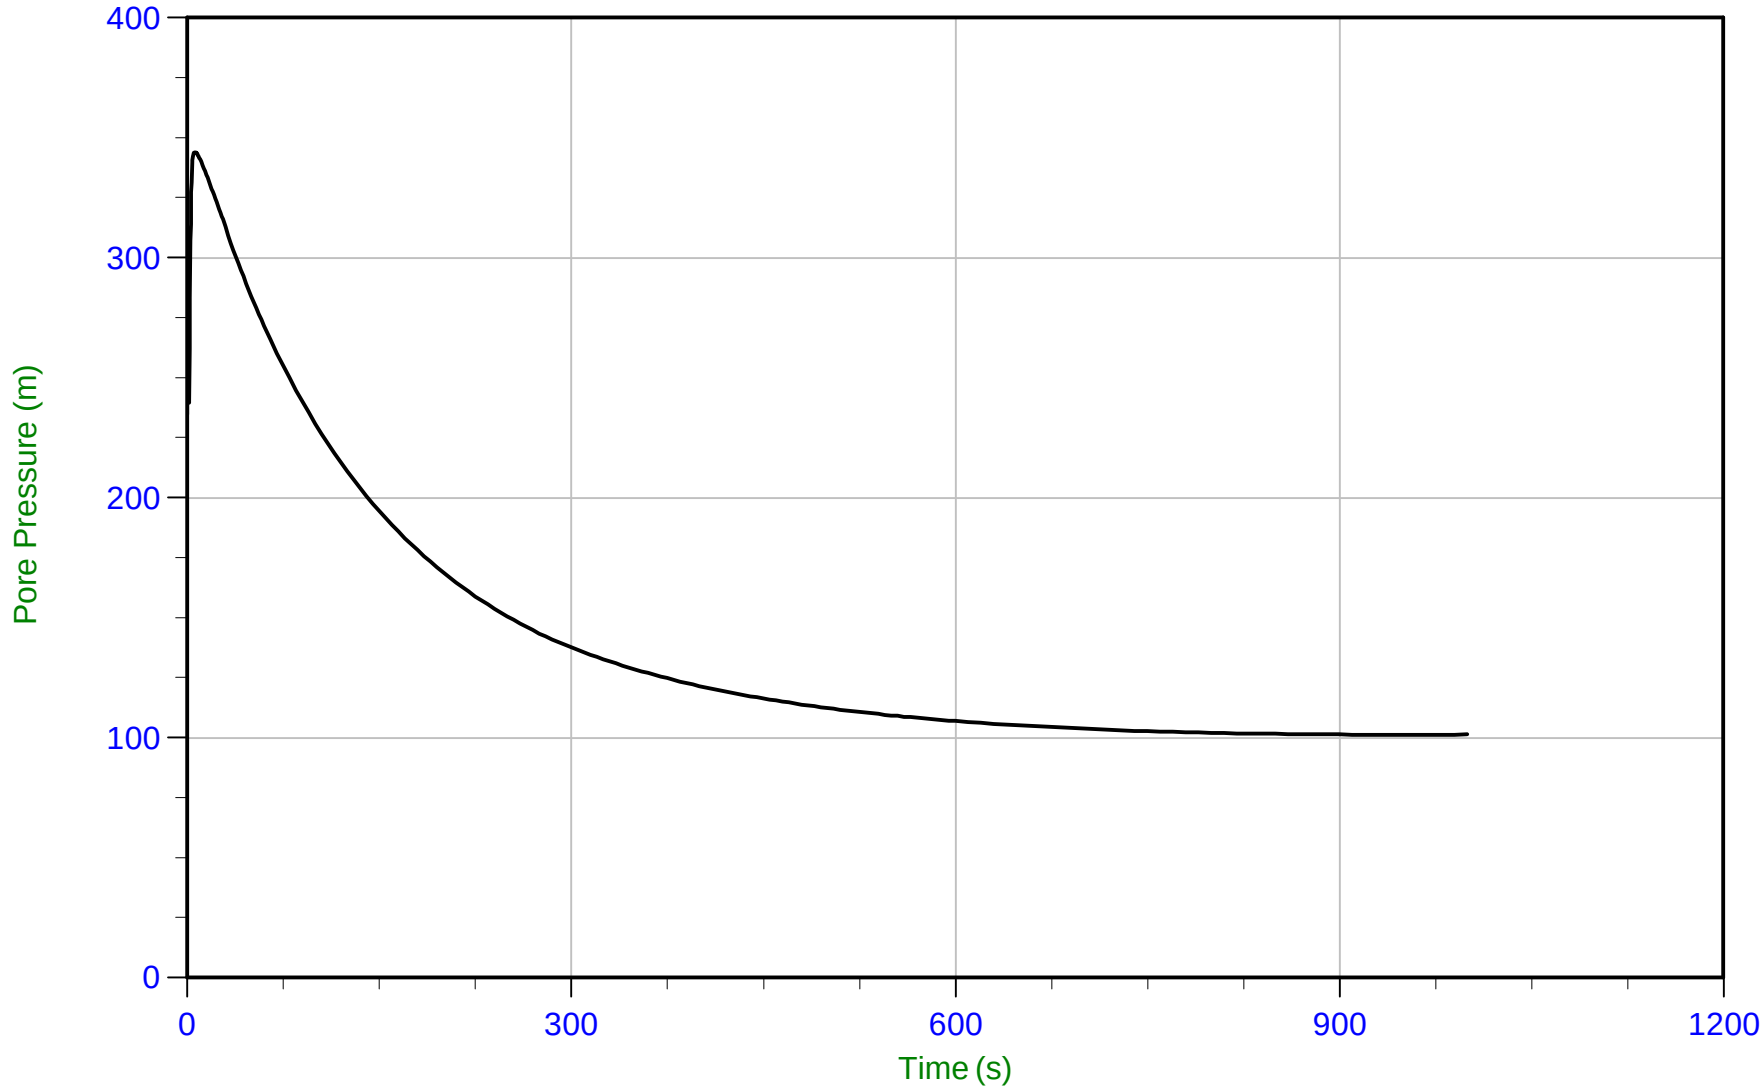

Trace Summary:

Filename: 22-02-23796_RP22-22CPT243A.PPF
Depth: 8.925 m / 29.281 ft
Duration: 1000.0 s

u Min: 101.3 m
u Max: 344.0 m
u Final: 101.4 m


WT: 4.000 m / 13.123 ft
Ueq: 4.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 15:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT244
Cone: 854:T1500F15U35 Area=15 cm²

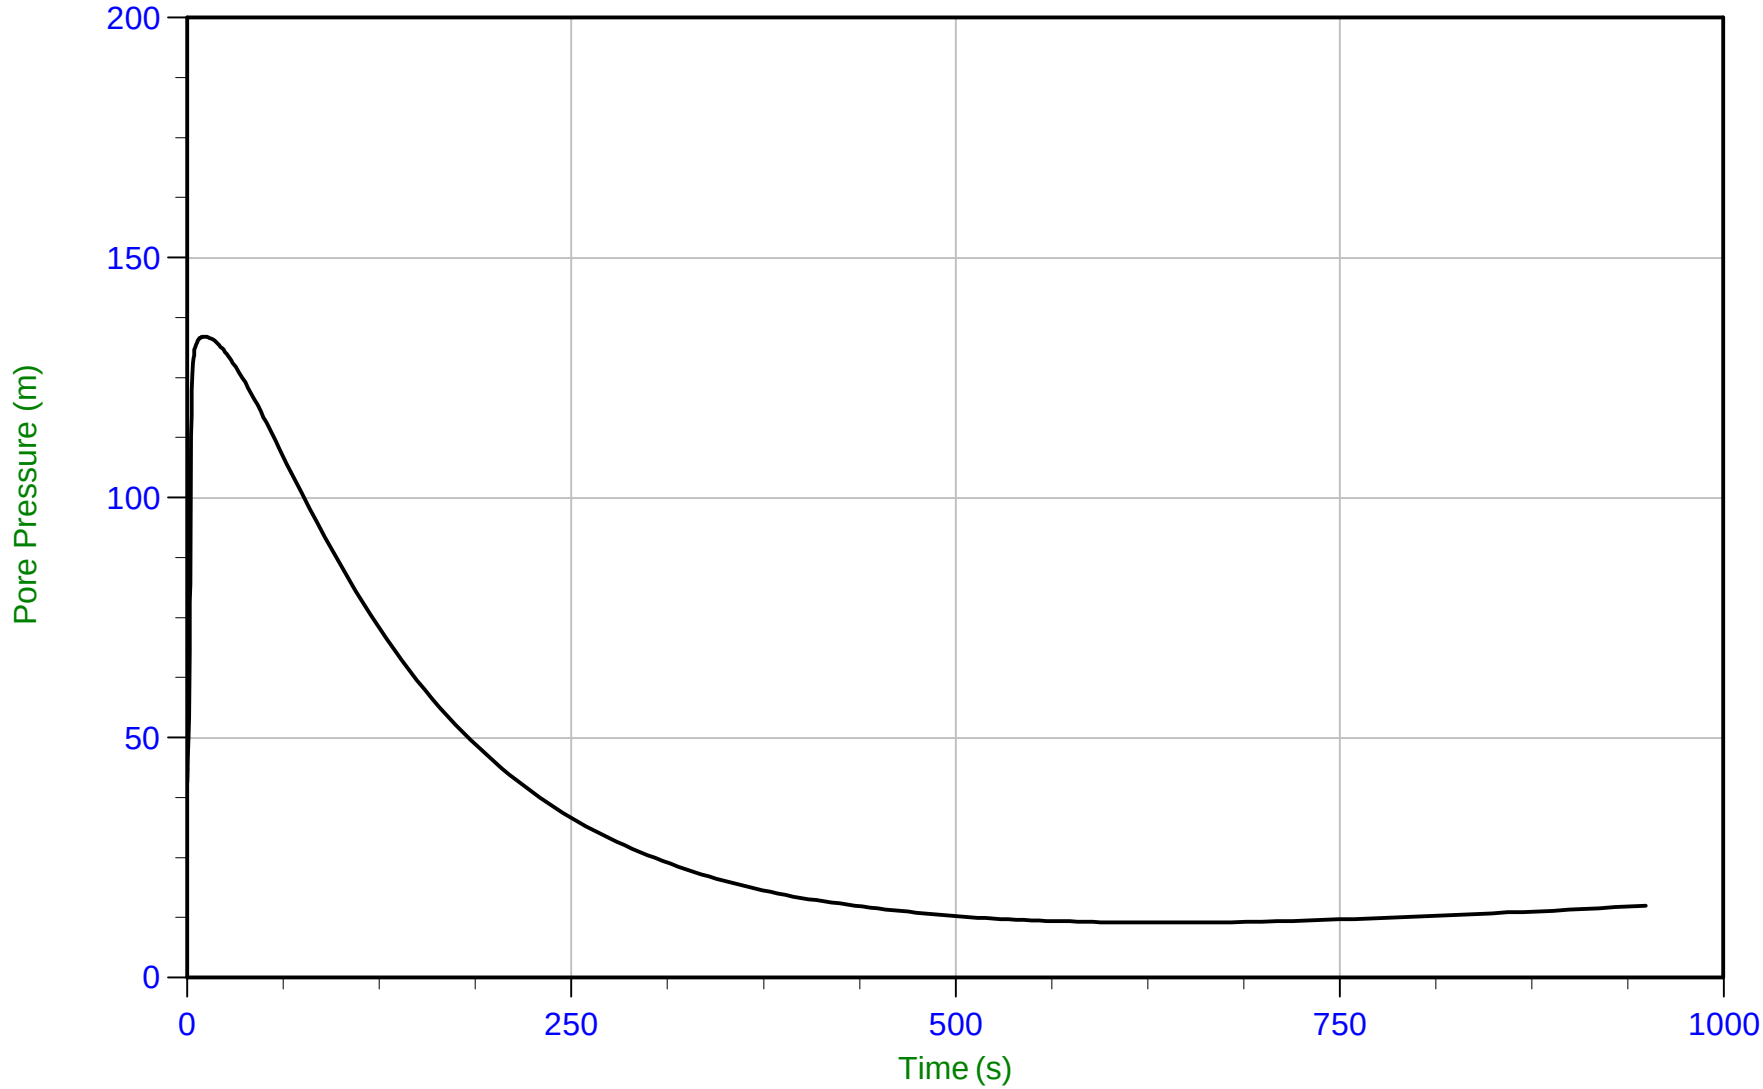

Trace Summary:

Filename: 22-02-23796_RP22-22CPT244.PPF
Depth: 6.825 m / 22.391 ft
Duration: 950.0 s


u Min: 11.5 m
u Max: 133.6 m
u Final: 15.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 15:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT244
Cone: 854:T1500F15U35 Area=15 cm²

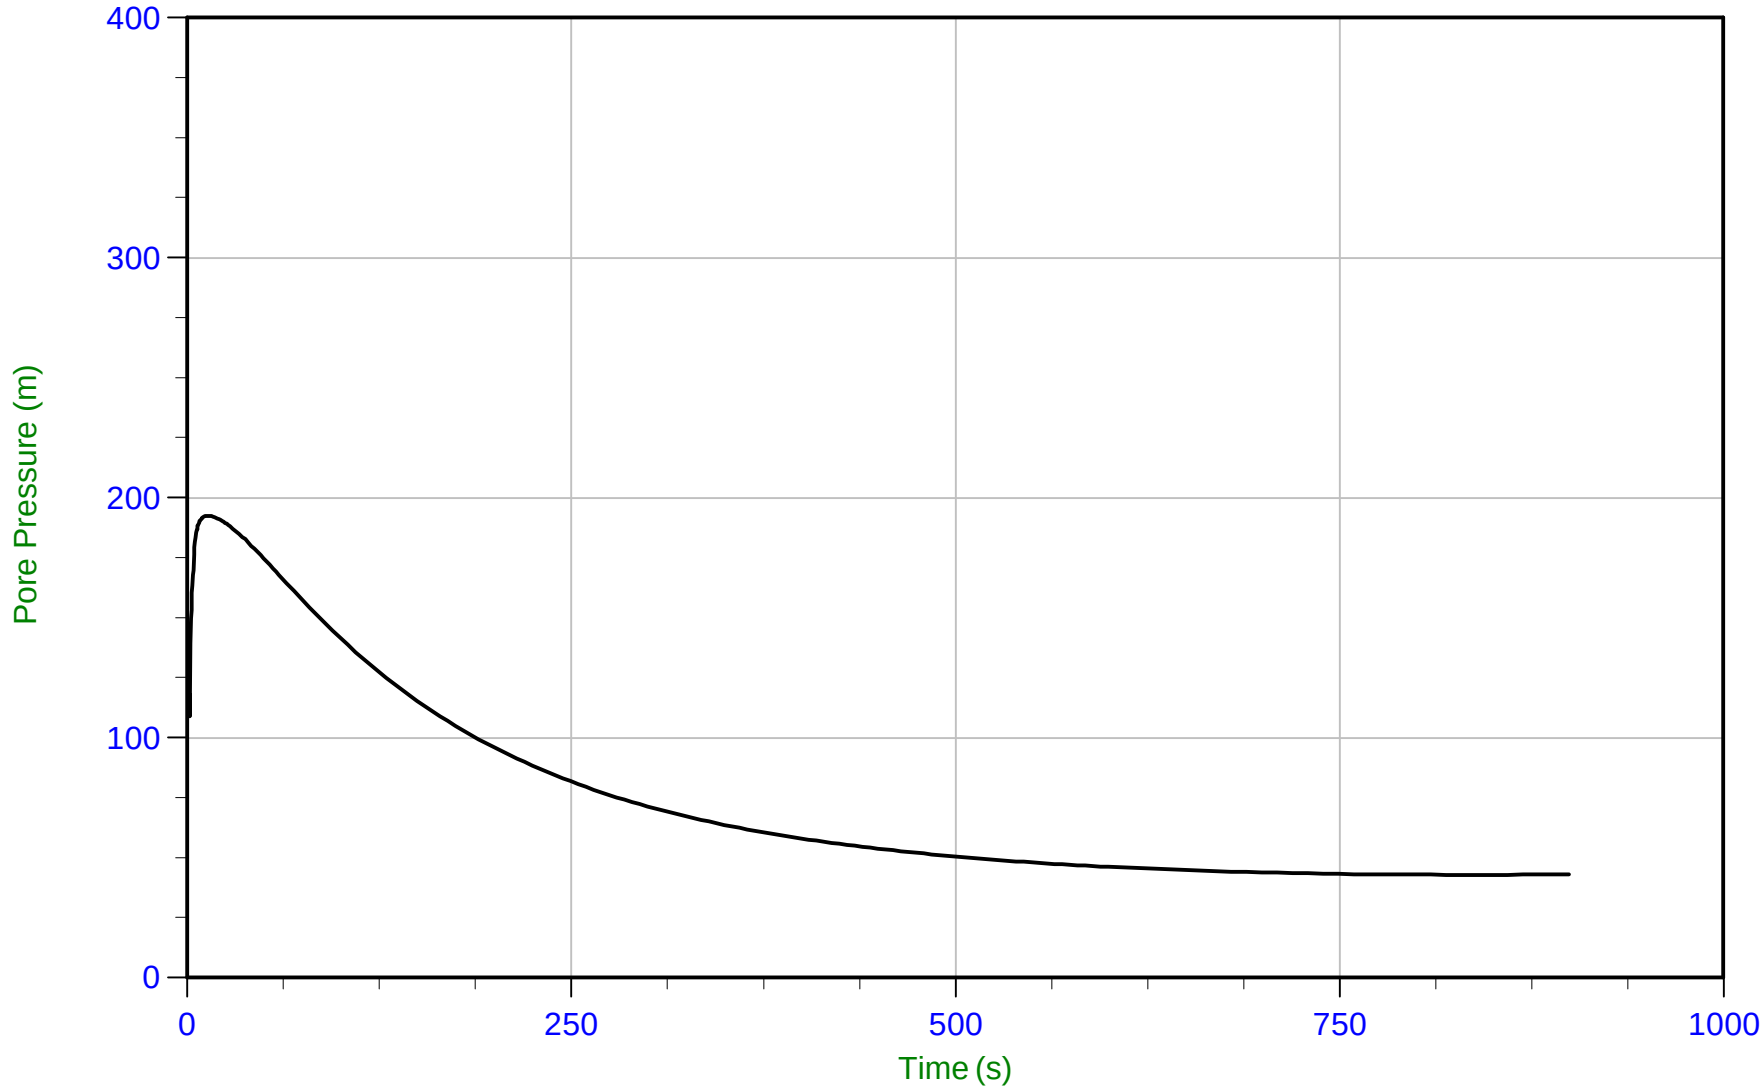

Trace Summary:

Filename: 22-02-23796_RP22-22CPT244.PPF
Depth: 11.250 m / 36.909 ft
Duration: 900.0 s

u Min: 42.9 m
u Max: 192.5 m
u Final: 43.0 m


WT: 4.000 m / 13.123 ft
Ueq: 7.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 17:12
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT245
Cone: 854:T1500F15U35 Area=15 cm²

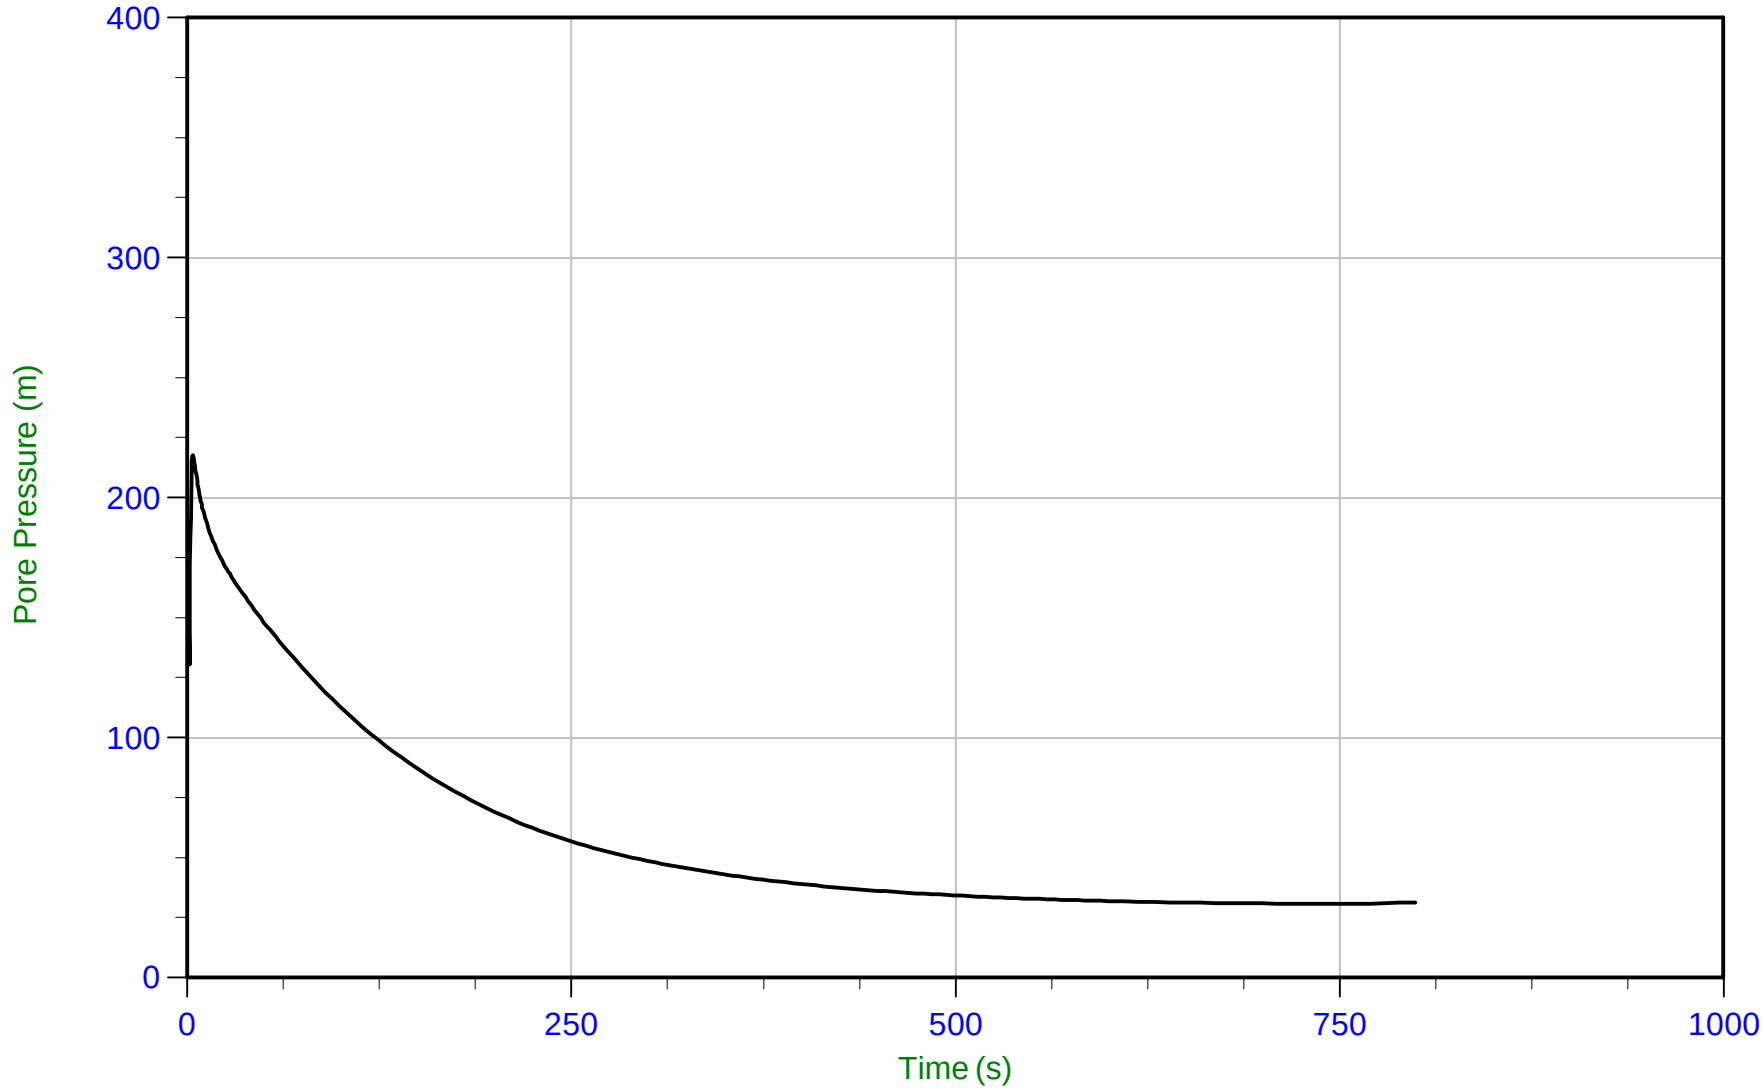

Trace Summary:

Filename: 22-02-23796_RS22-22CPT245.PPF
Depth: 7.725 m / 25.344 ft
Duration: 800.0 s

u Min: 30.9 m
u Max: 217.7 m
u Final: 31.3 m


WT: 3.100 m / 10.170 ft
Ueq: 4.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/27/2022 17:12
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT245
Cone: 854:T1500F15U35 Area=15 cm²

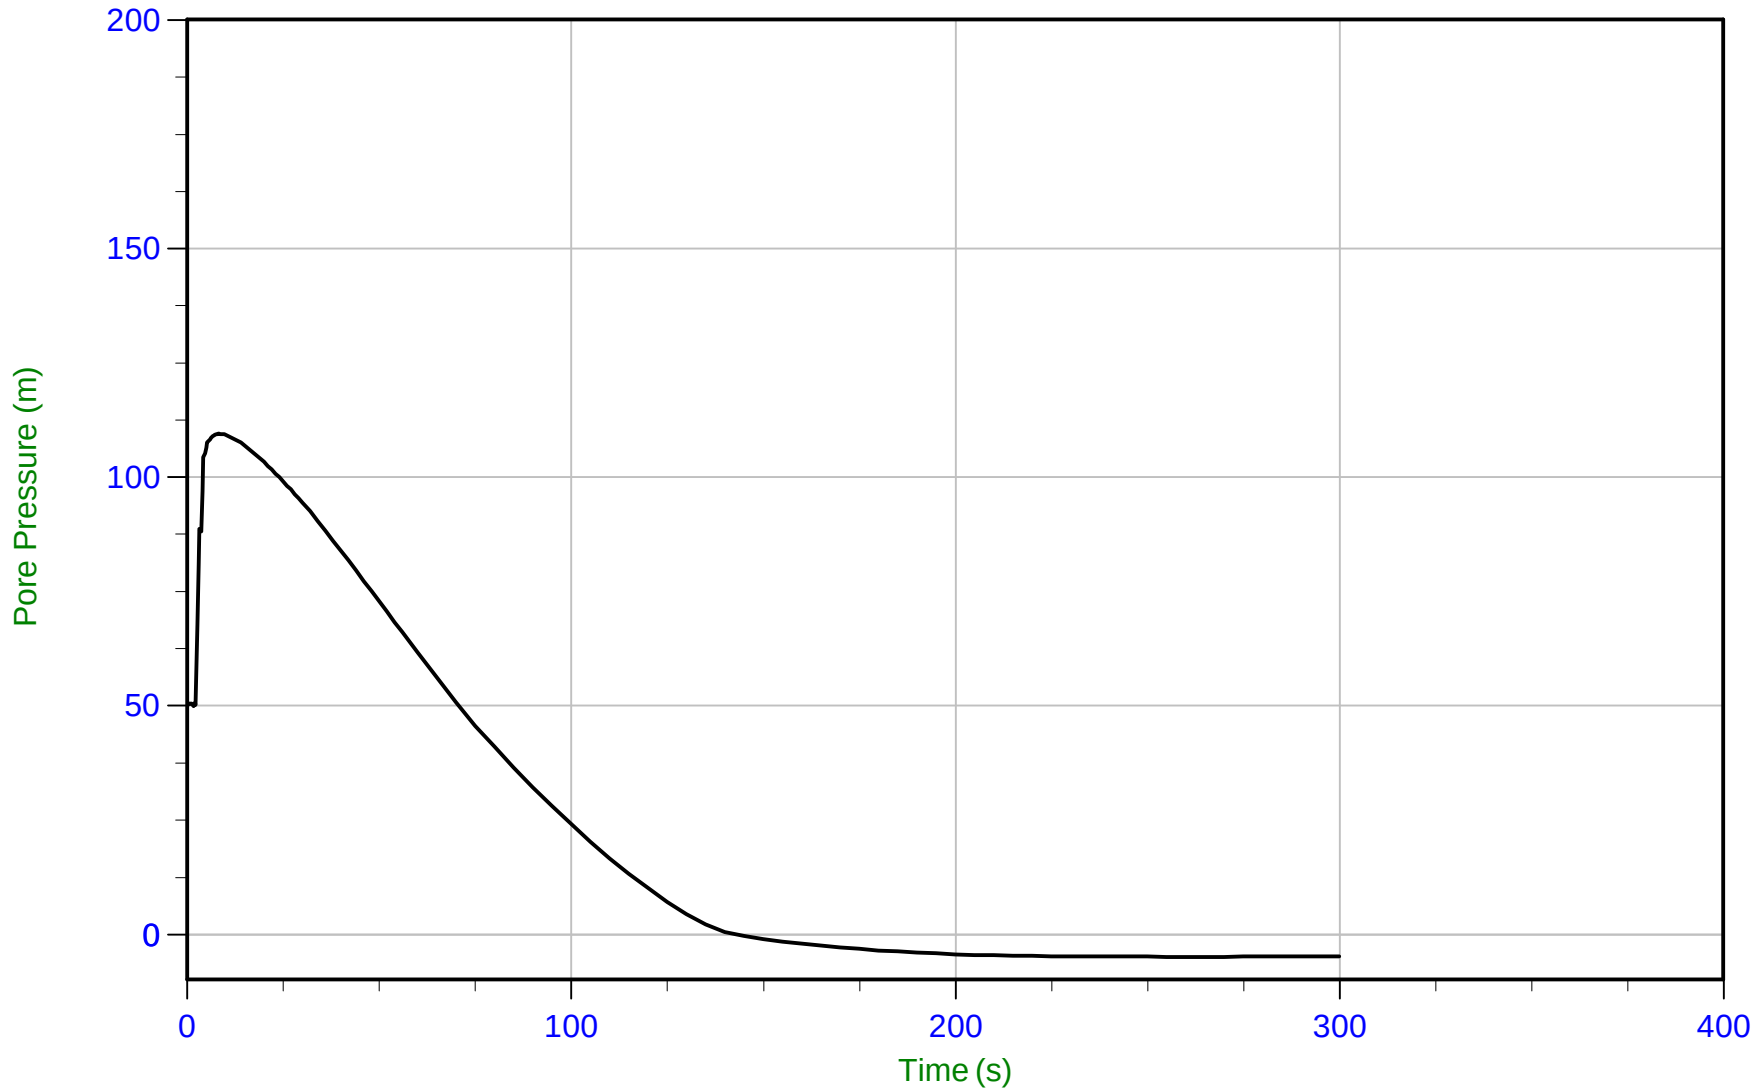

Trace Summary:

Filename: 22-02-23796_RS22-22CPT245.PPF
Depth: 10.725 m / 35.187 ft
Duration: 300.0 s


u Min: -5.0 m
u Max: 109.4 m
u Final: -4.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/01/2022 13:43
Site: Brooks, Alberta

Sounding: RCPT22-22CPT246
Cone: 854:T1500F15U35 Area=15 cm²

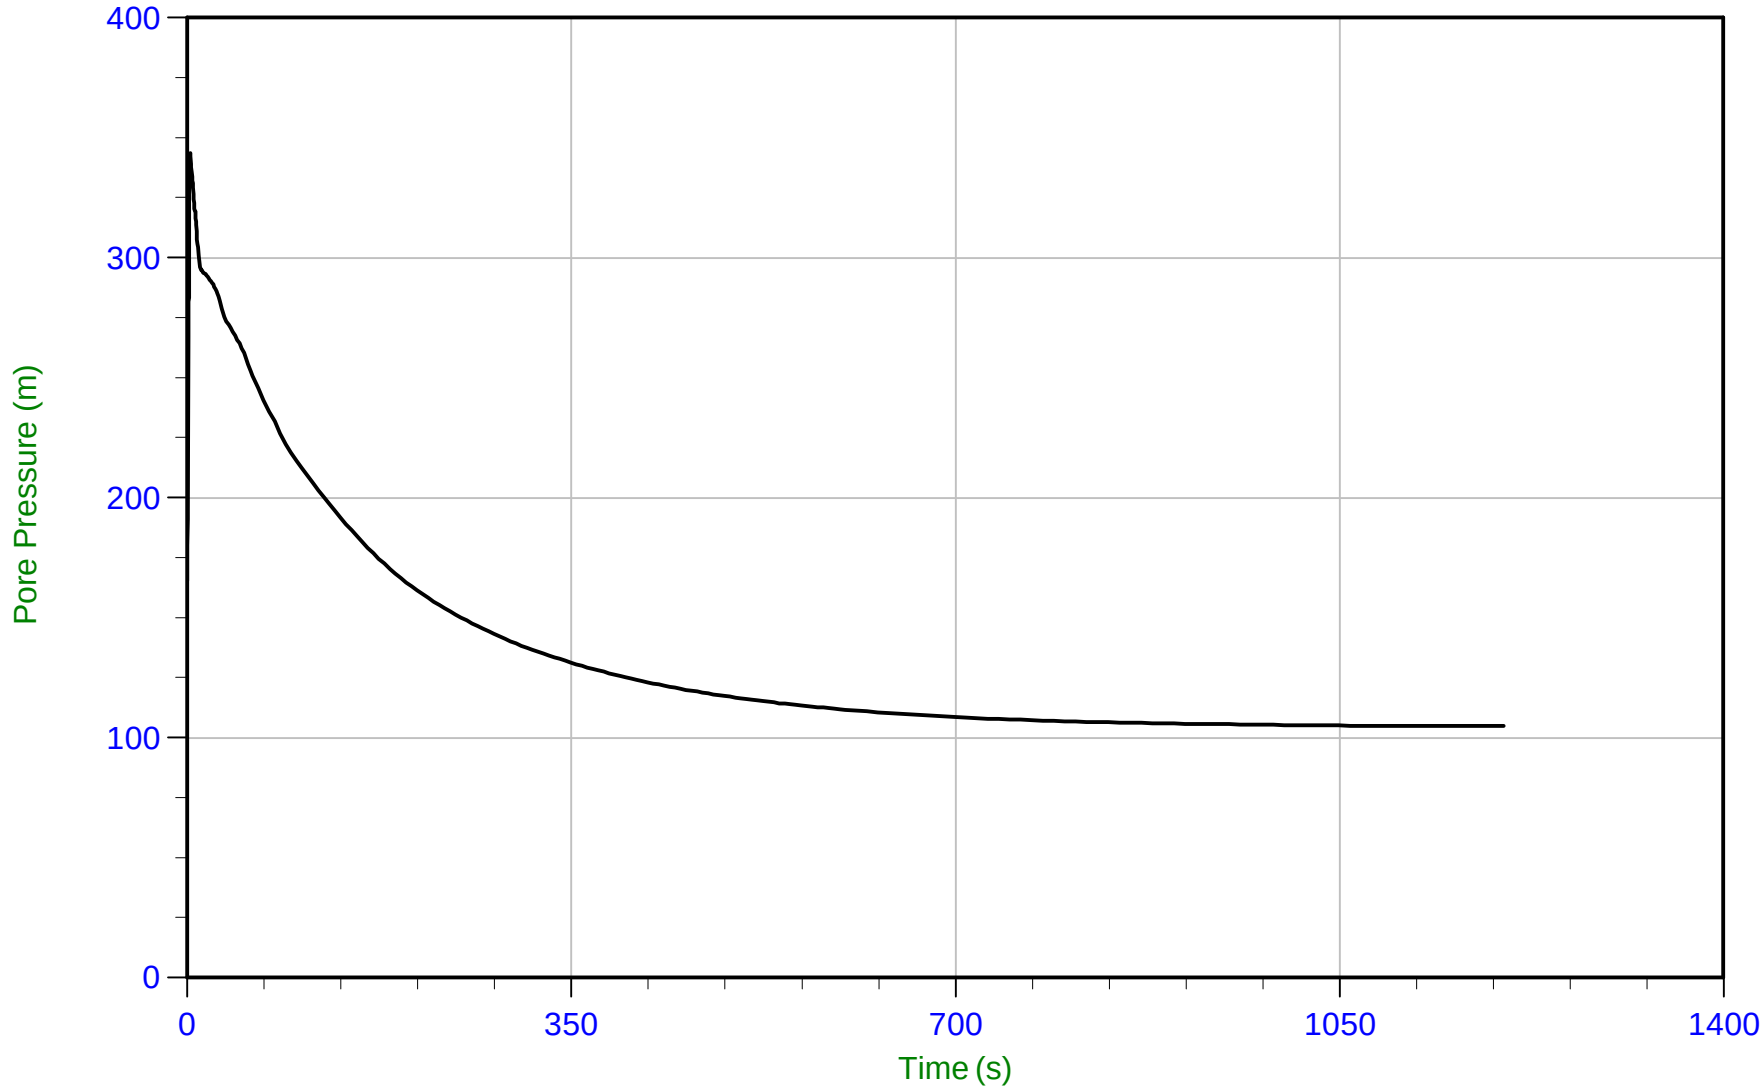

Trace Summary:

Filename: 22-02-23796_RP22-22CPT246.PPF
Depth: 5.425 m / 17.798 ft
Duration: 1200.0 s


u Min: 104.9 m
u Max: 343.6 m
u Final: 105.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 06:51
Site: Brooks, Alberta

Sounding: RCPT22-22CPT247
Cone: 854:T1500F15U35 Area=15 cm²

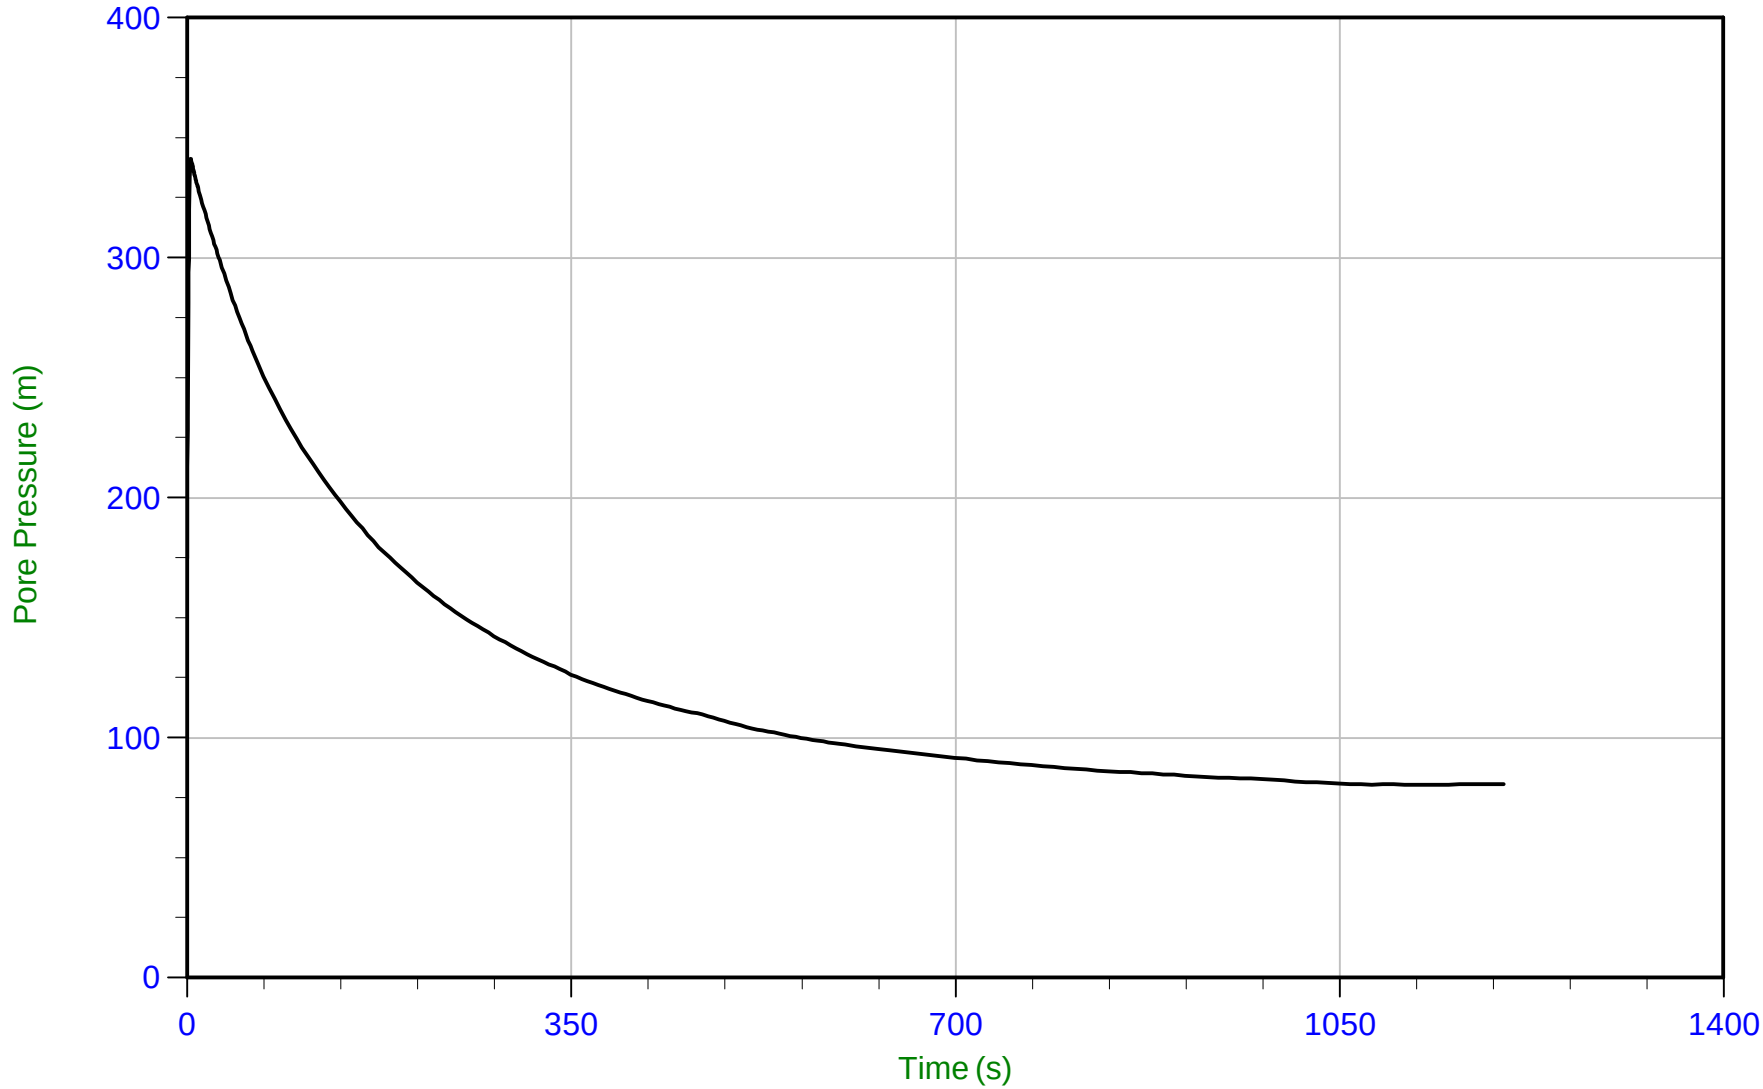

Trace Summary:

Filename: 22-02-23796_RP22-22CPT247.PPF
Depth: 6.100 m / 20.013 ft
Duration: 1200.0 s


u Min: 80.4 m
u Max: 341.3 m
u Final: 80.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 08:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT248
Cone: 854:T1500F15U35 Area=15 cm²

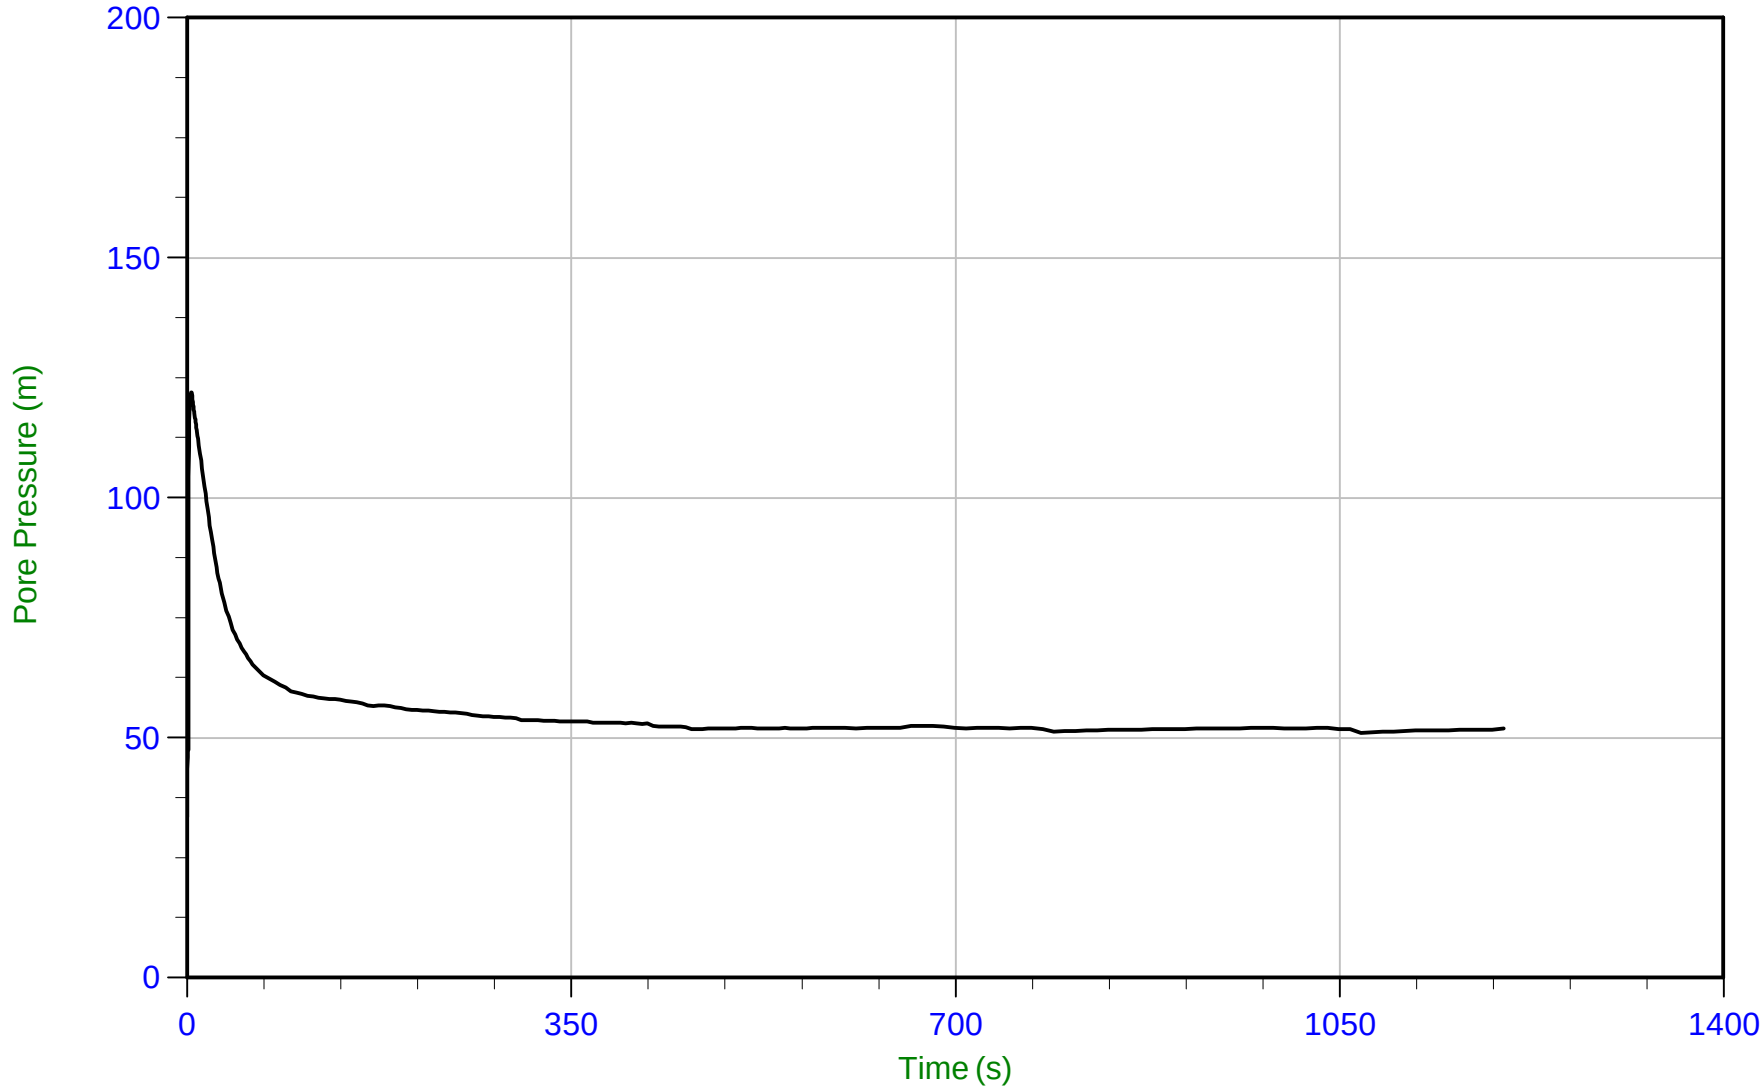

Trace Summary:

Filename: 22-02-23796_RP22-22CPT248.PPF
Depth: 3.850 m / 12.631 ft
Duration: 1200.0 s


u Min: 33.6 m
u Max: 122.0 m
u Final: 52.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 08:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT248
Cone: 854:T1500F15U35 Area=15 cm²

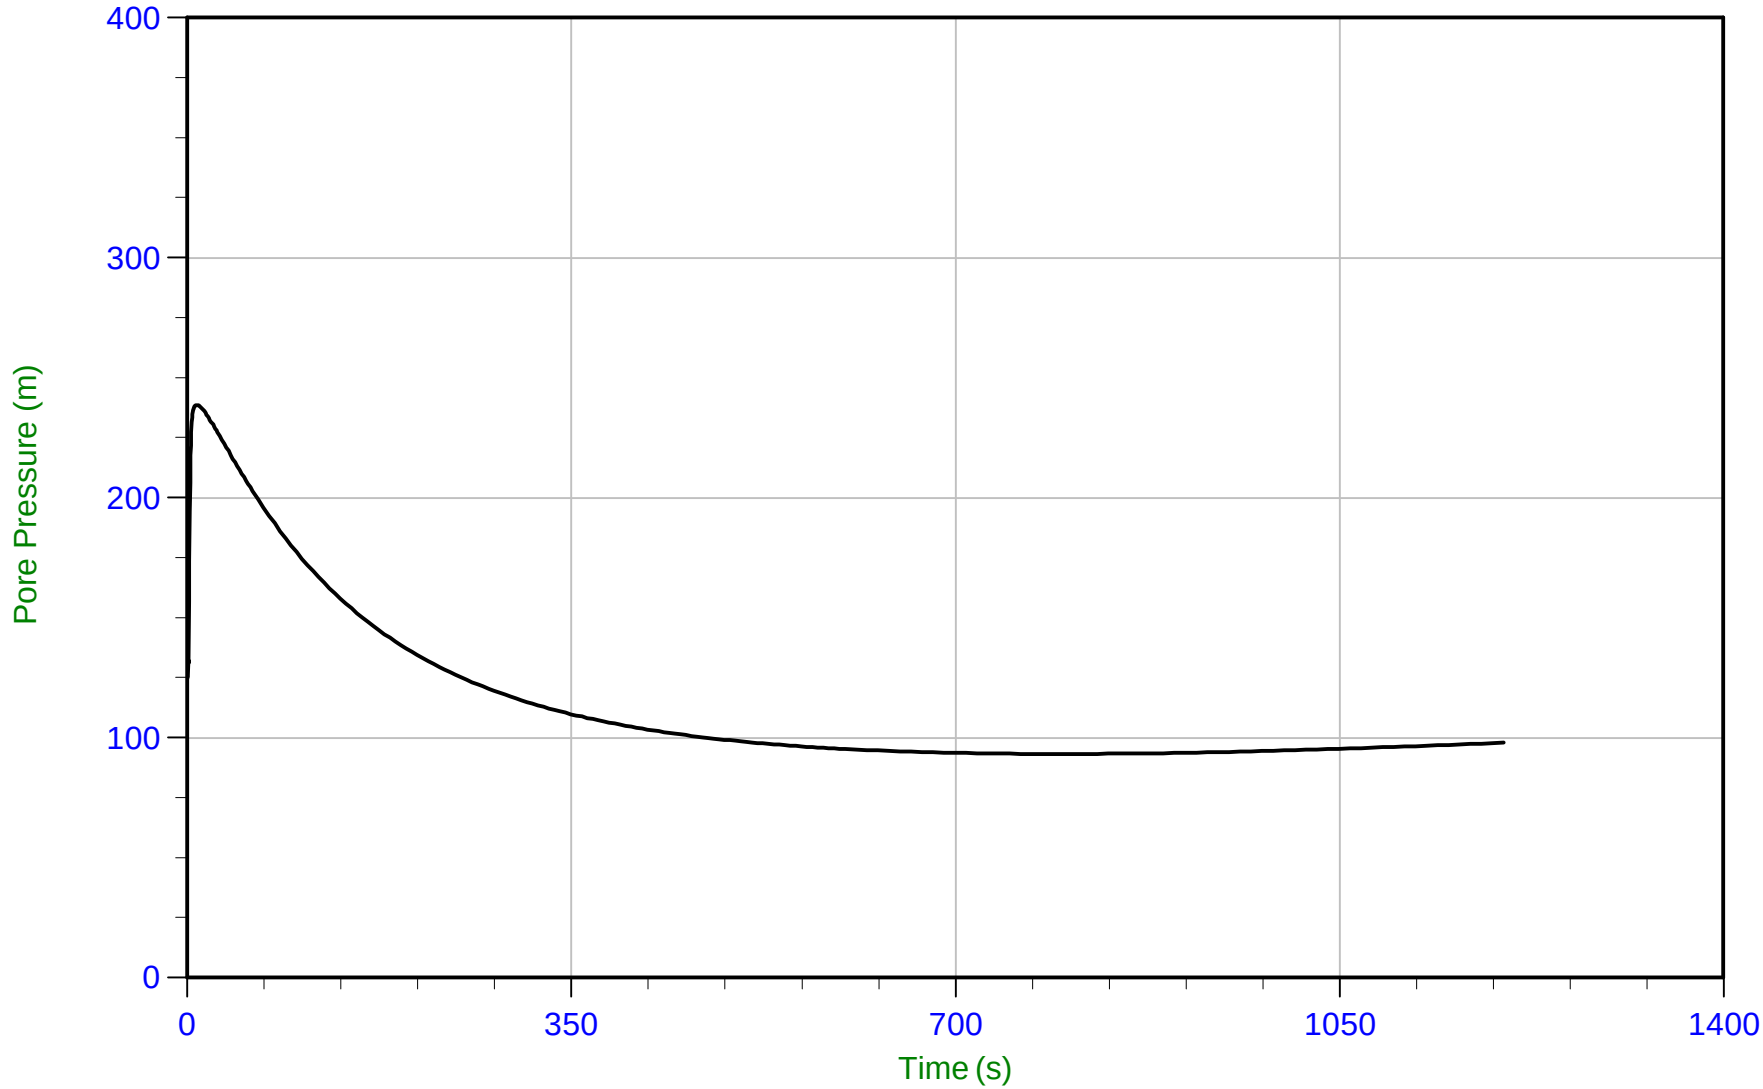

Trace Summary:

Filename: 22-02-23796_RP22-22CPT248.PPF
Depth: 10.875 m / 35.679 ft
Duration: 1200.0 s


u Min: 93.3 m
u Max: 238.7 m
u Final: 97.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 11:28
Site: Brooks, Alberta

Sounding: RCPT22-22CPT249
Cone: 854:T1500F15U35 Area=15 cm²

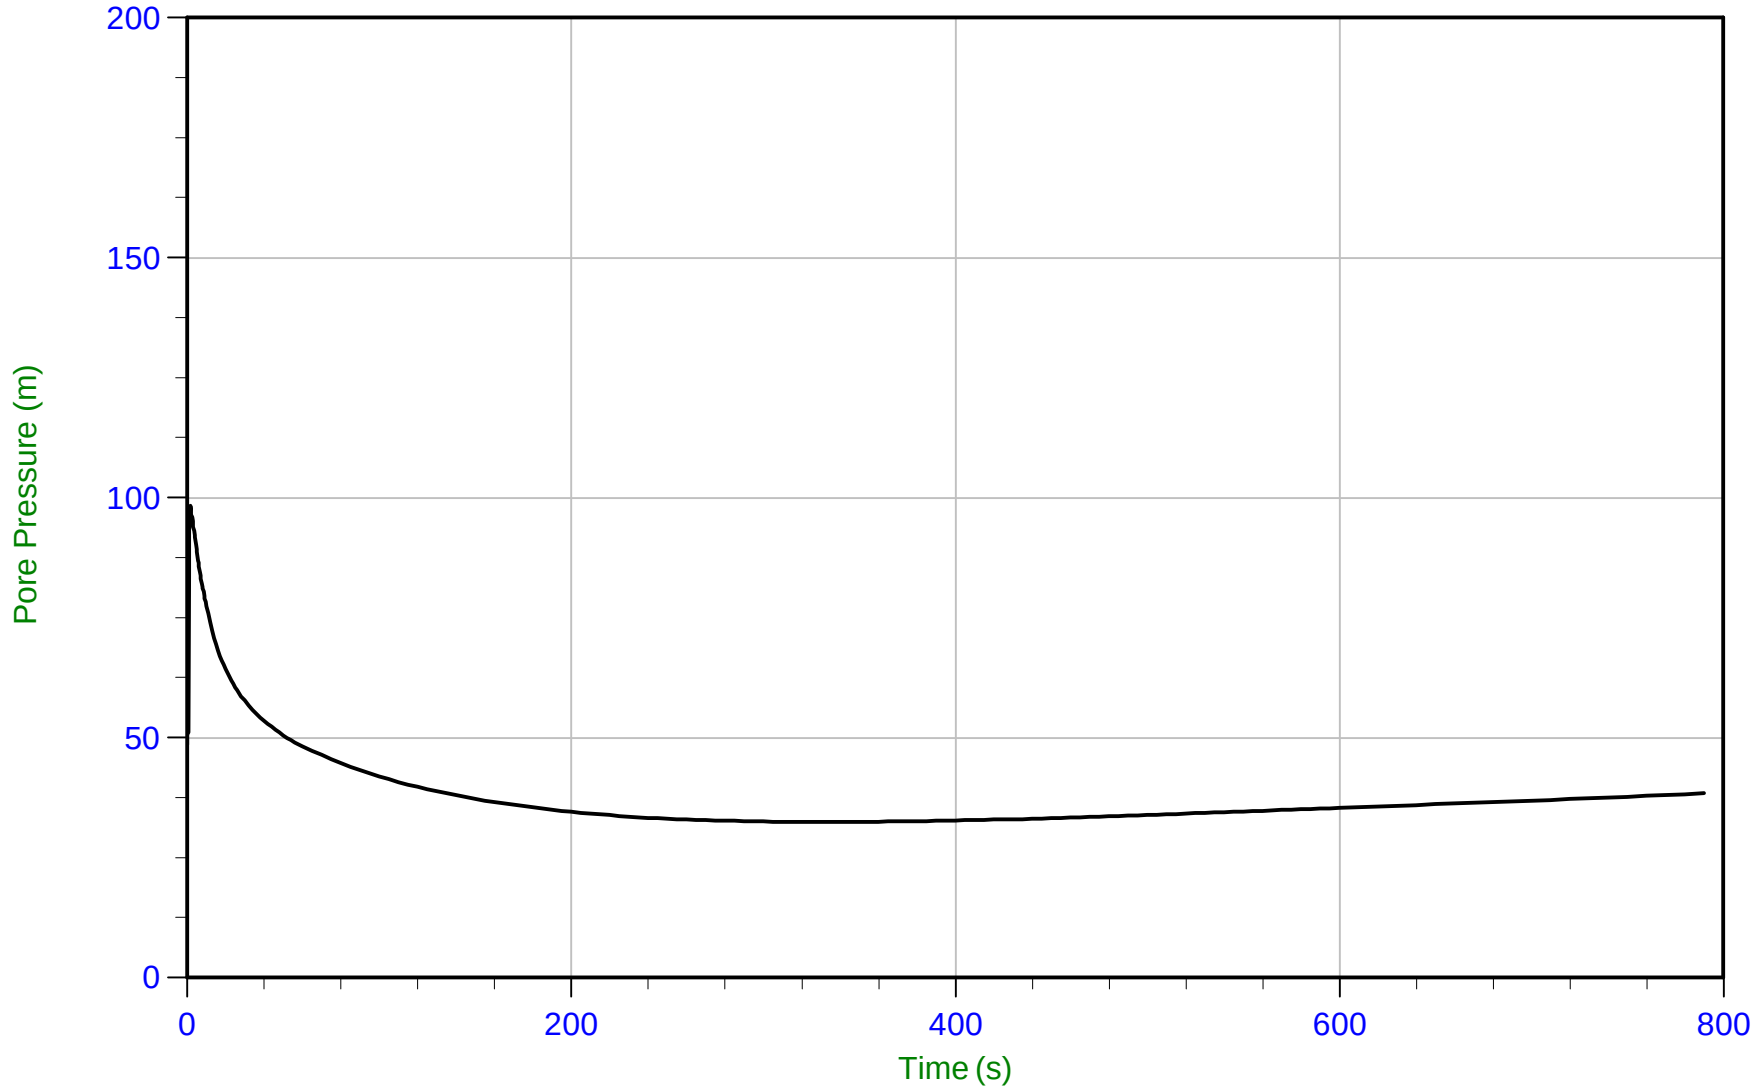

Trace Summary:

Filename: 22-02-23796_RP22-22CPT249.PPF
Depth: 4.725 m / 15.502 ft
Duration: 790.0 s


u Min: 32.5 m
u Max: 98.3 m
u Final: 38.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 11:28
Site: Brooks, Alberta

Sounding: RCPT22-22CPT249
Cone: 854:T1500F15U35 Area=15 cm²

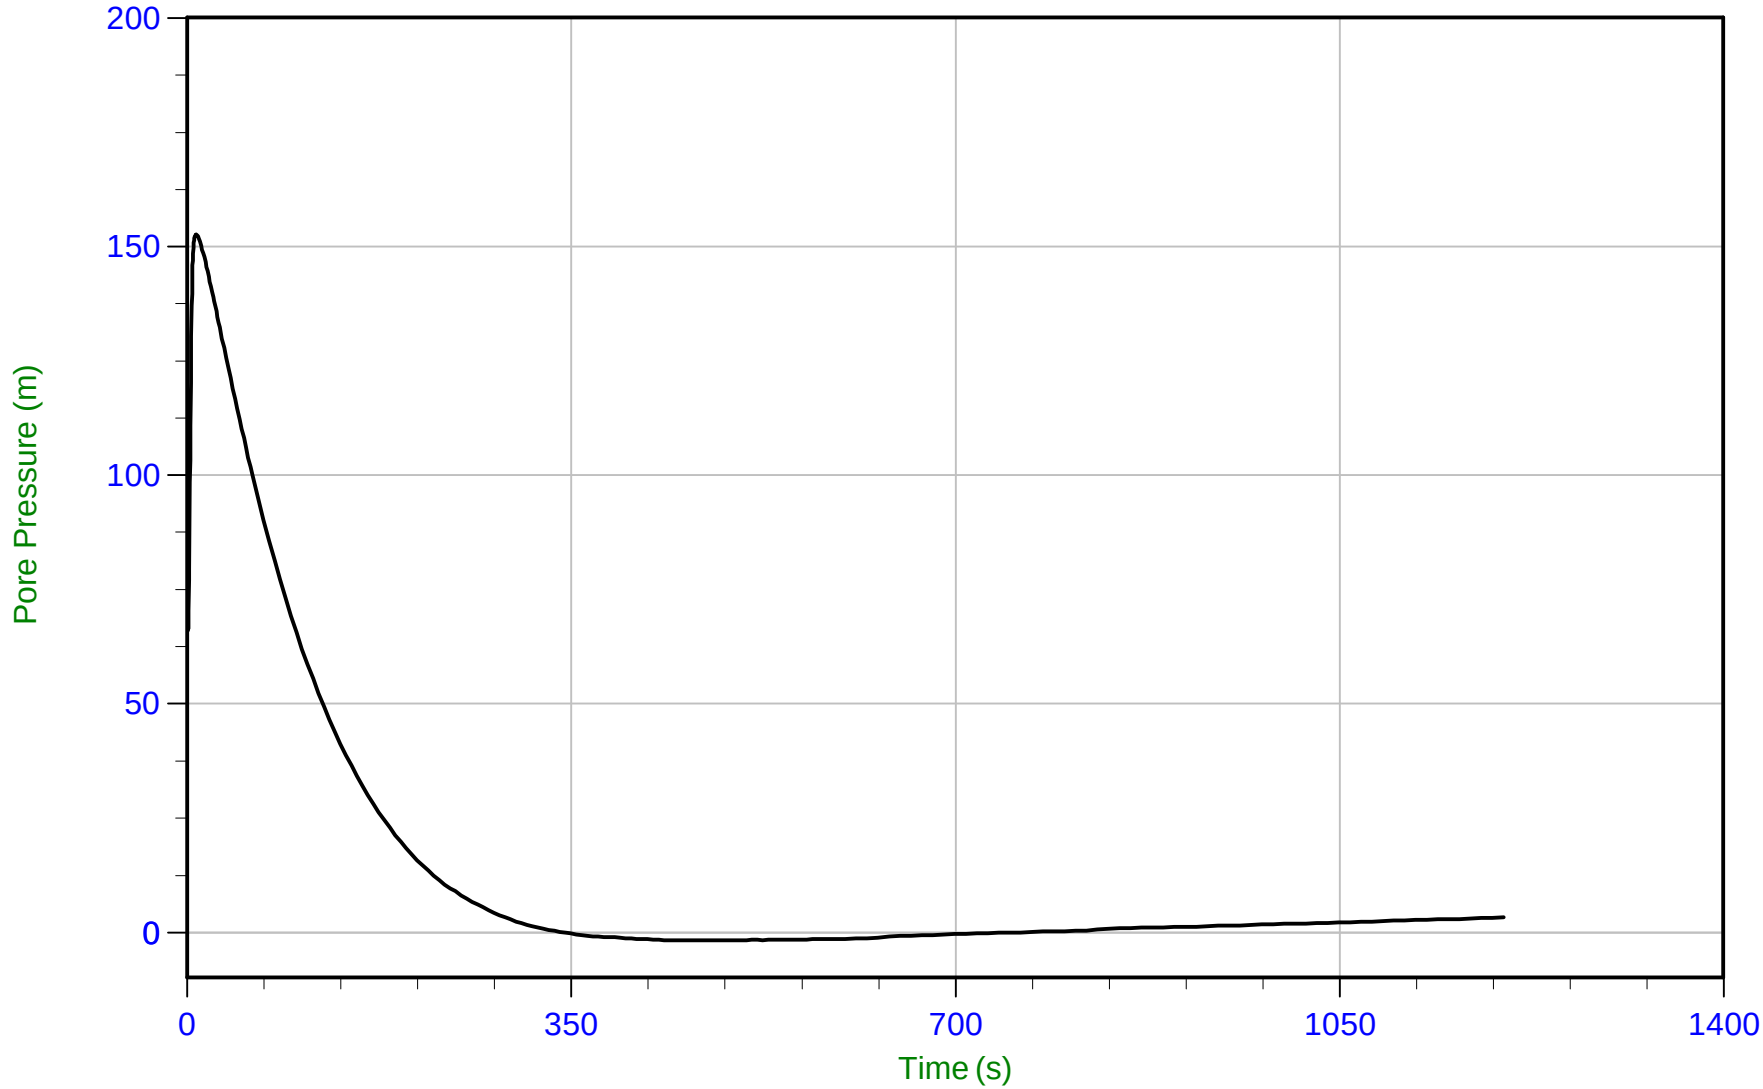

Trace Summary:

Filename: 22-02-23796_RP22-22CPT249.PPF
Depth: 12.000 m / 39.370 ft
Duration: 1200.0 s


u Min: -1.9 m
u Max: 152.5 m
u Final: 3.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 12:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT250
Cone: 854:T1500F15U35 Area=15 cm²

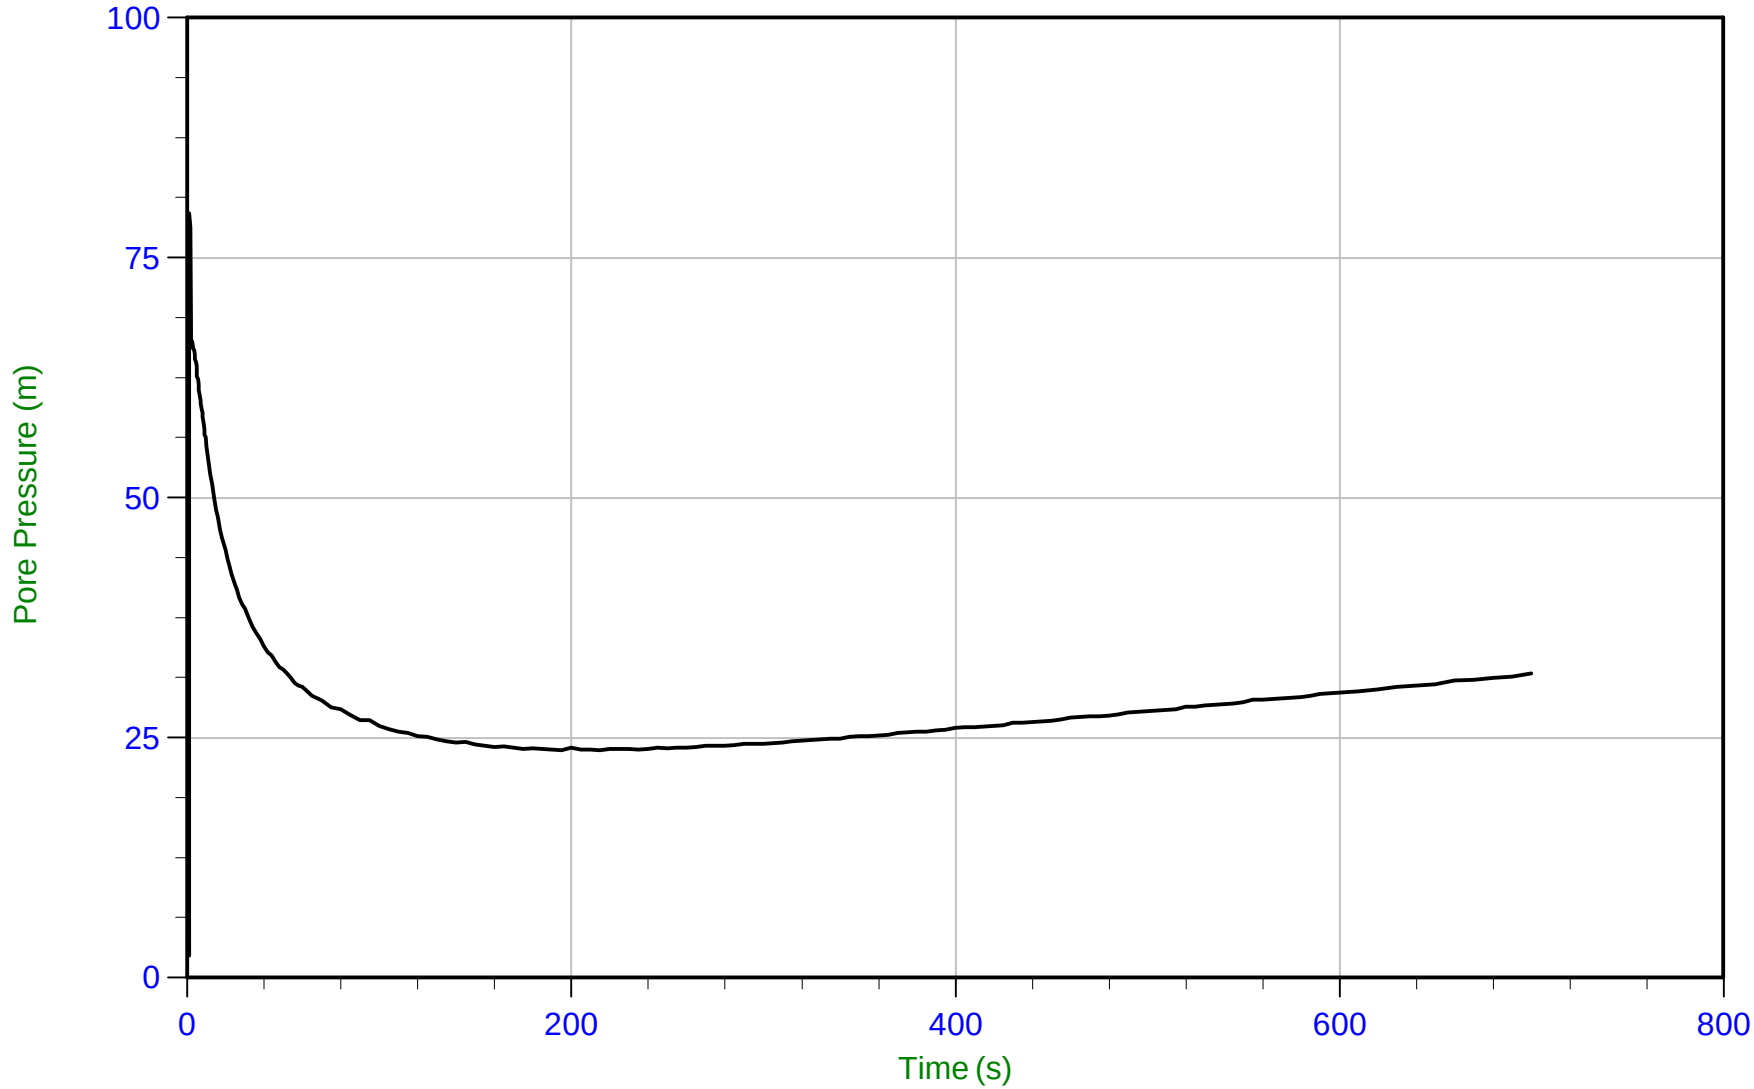

Trace Summary:

Filename: 22-02-23796_RP22-22CPT250.PPF
Depth: 3.875 m / 12.713 ft
Duration: 700.0 s


u Min: 2.3 m
u Max: 79.7 m
u Final: 31.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 13:36
Site: Brooks, Alberta

Sounding: RCPT22-22CPT251
Cone: 854:T1500F15U35 Area=15 cm²

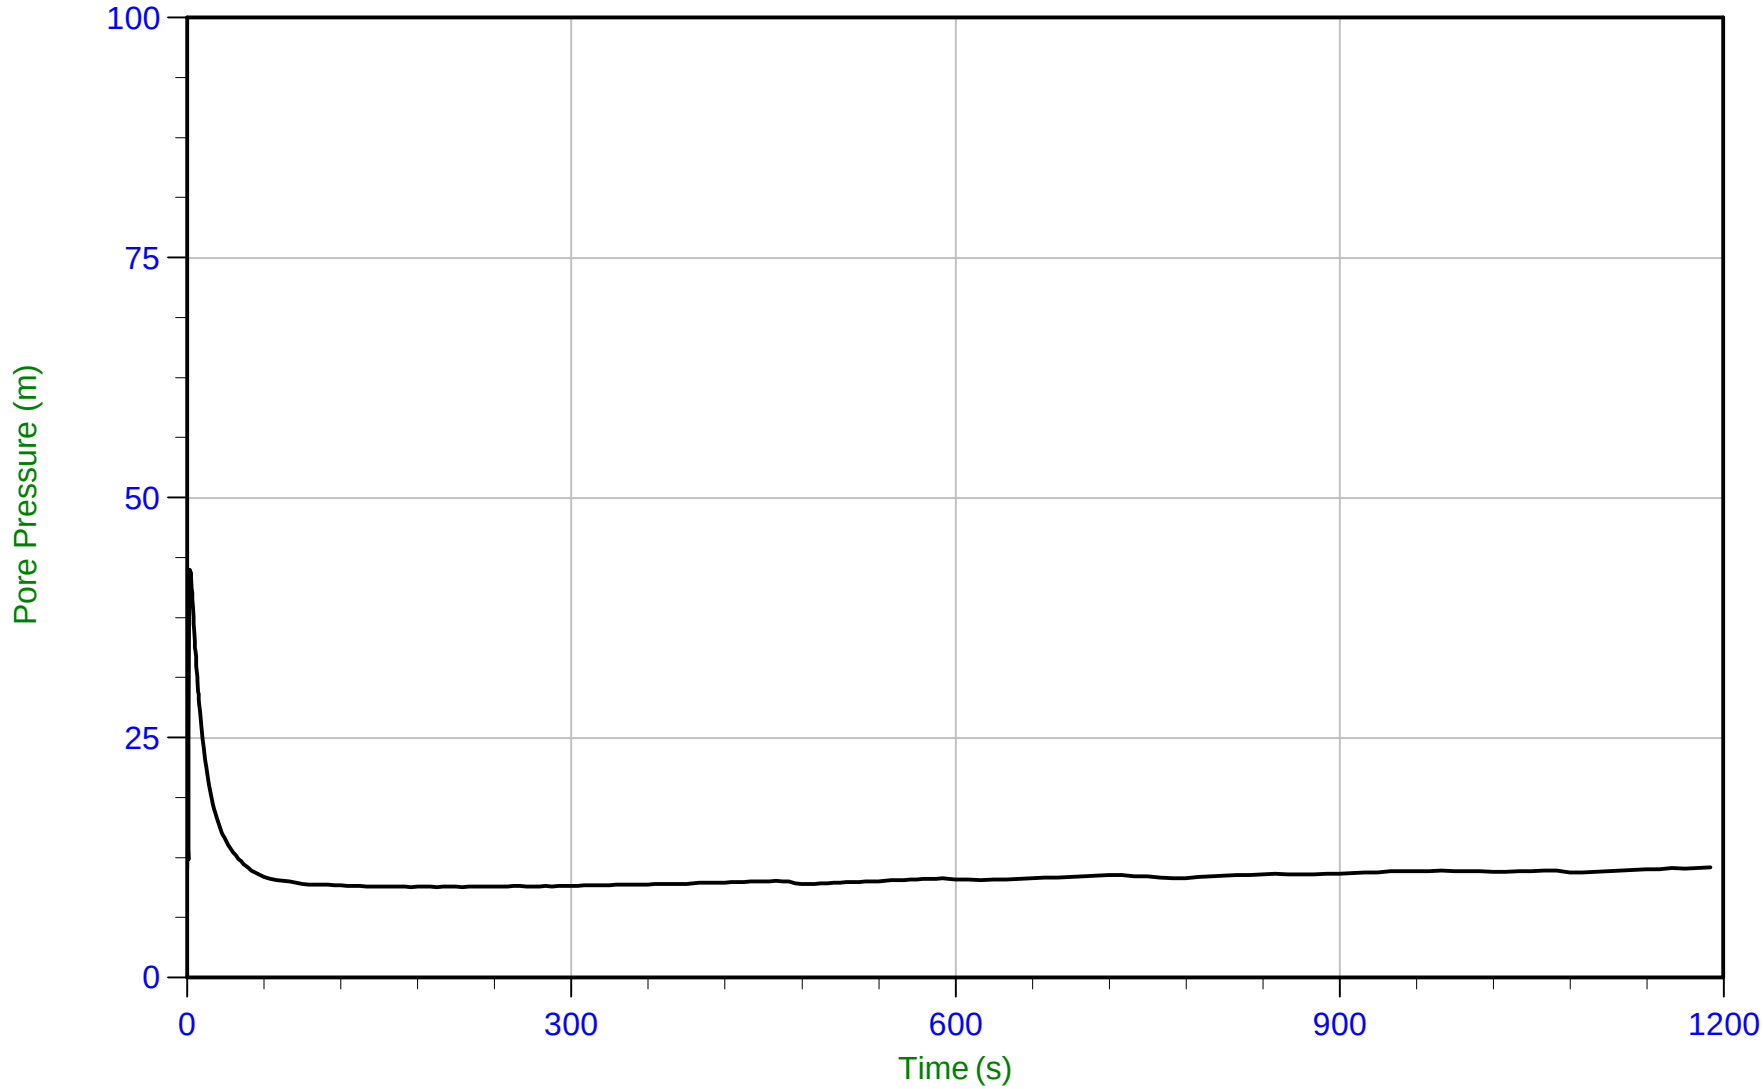

Trace Summary:

Filename: 22-02-23796_RP22-22CPT251.PPF
Depth: 4.825 m / 15.830 ft
Duration: 1190.0 s


u Min: 9.5 m
u Max: 42.5 m
u Final: 11.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 15:05
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT252
Cone: 854:T1500F15U35 Area=15 cm²

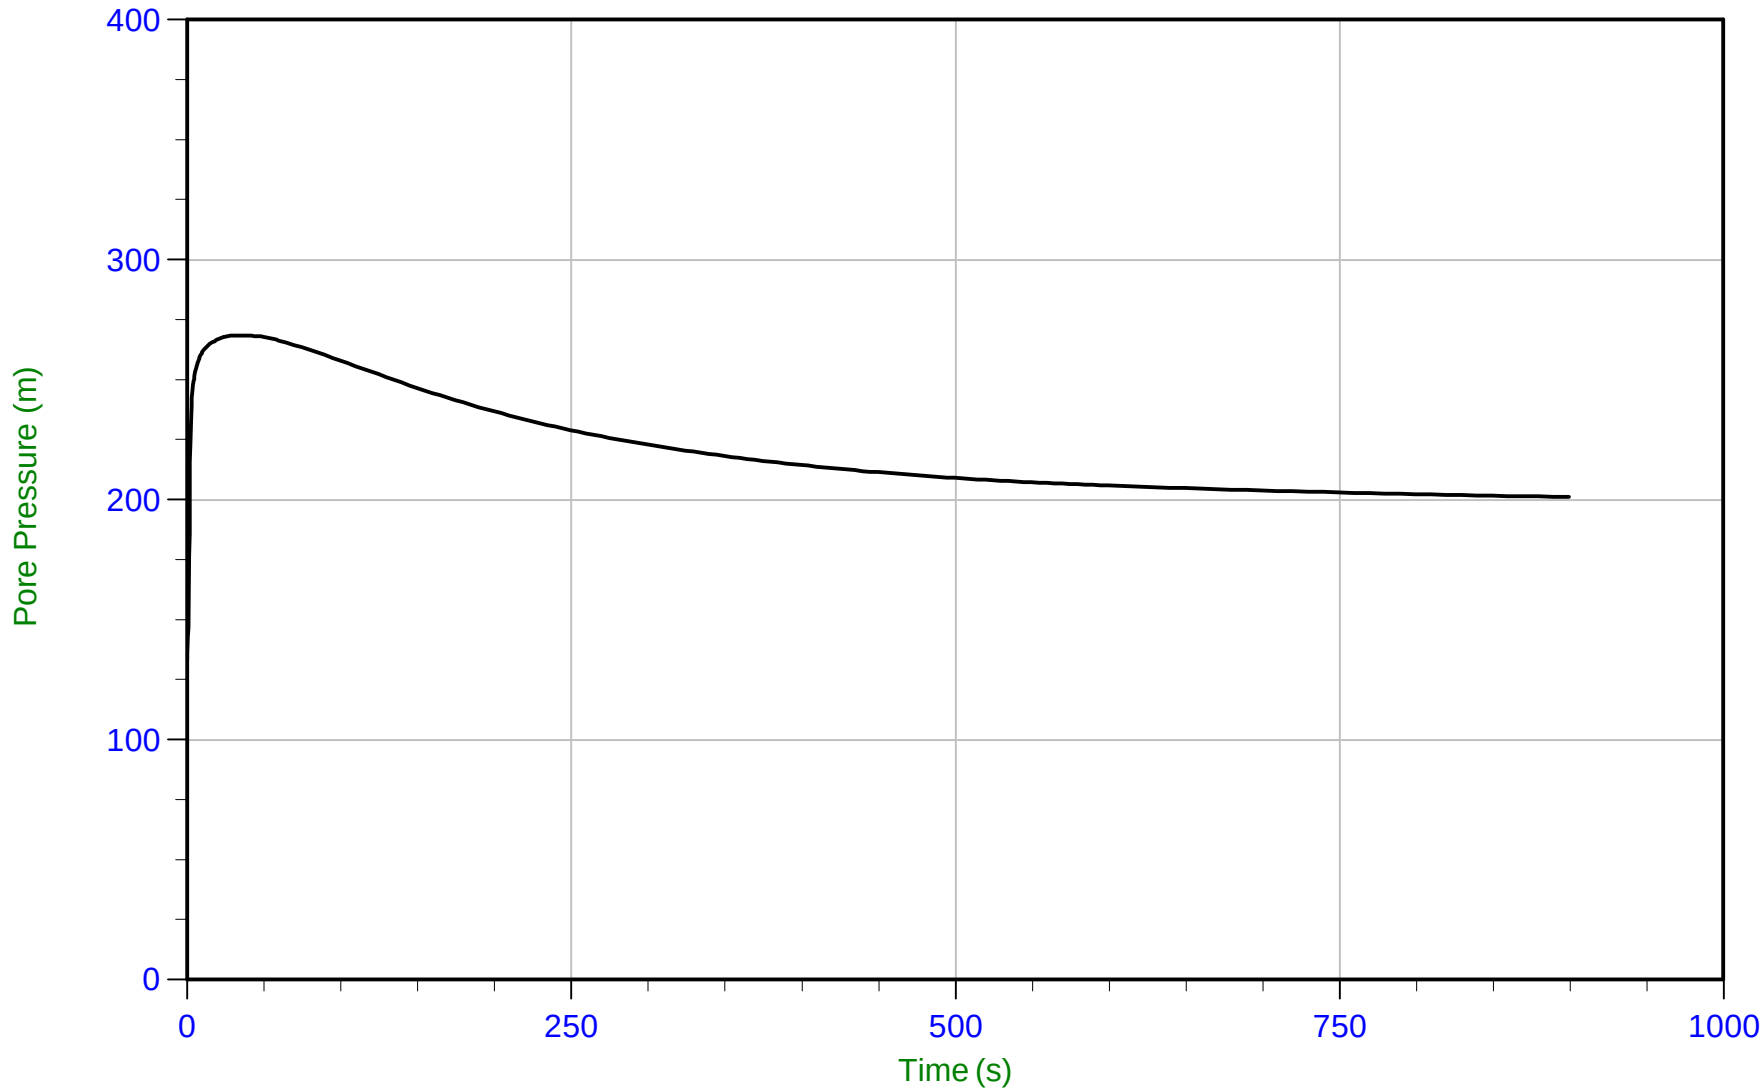

Trace Summary:

Filename: 22-02-23796_RS22-22CPT252.PPF
Depth: 5.800 m / 19.029 ft
Duration: 900.0 s


u Min: 133.5 m
u Max: 268.5 m
u Final: 201.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 15:05
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT252
Cone: 854:T1500F15U35 Area=15 cm²

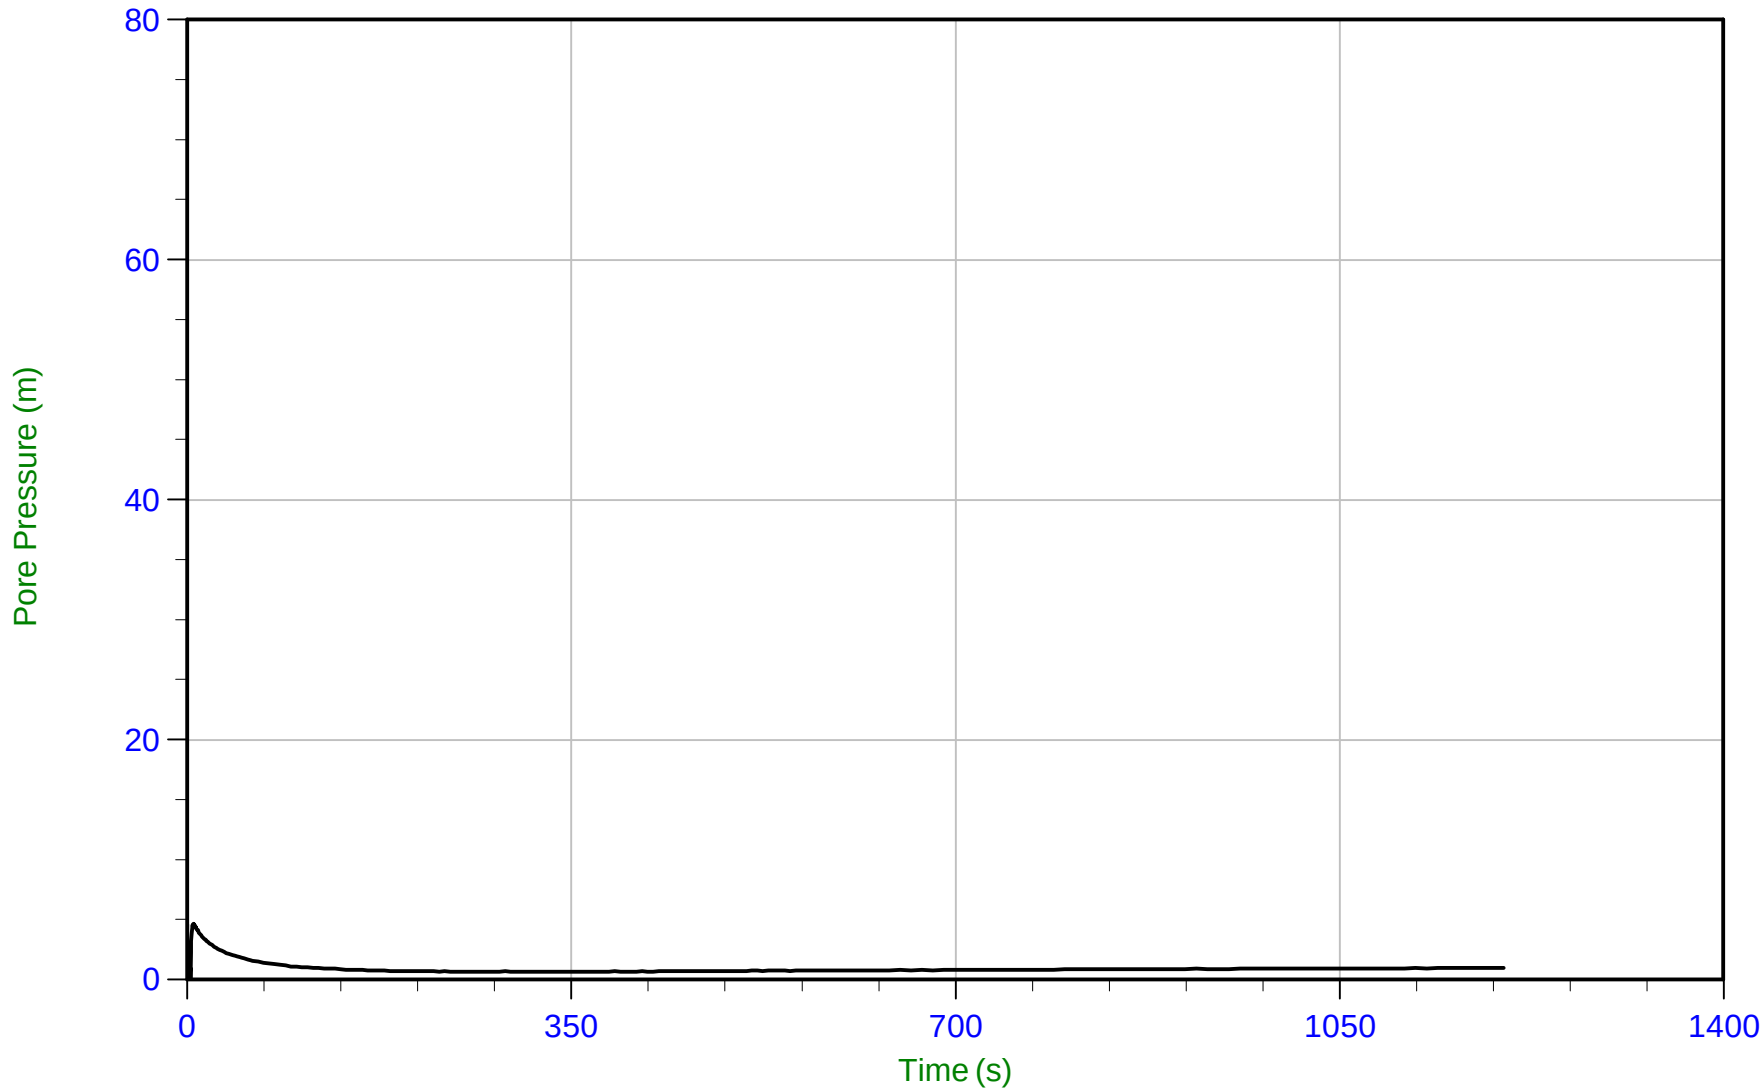

Trace Summary:

Filename: 22-02-23796_RS22-22CPT252.PPF
Depth: 6.825 m / 22.391 ft
Duration: 1200.0 s


u Min: -0.7 m
u Max: 4.6 m
u Final: 1.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 15:05
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT252
Cone: 854:T1500F15U35 Area=15 cm²

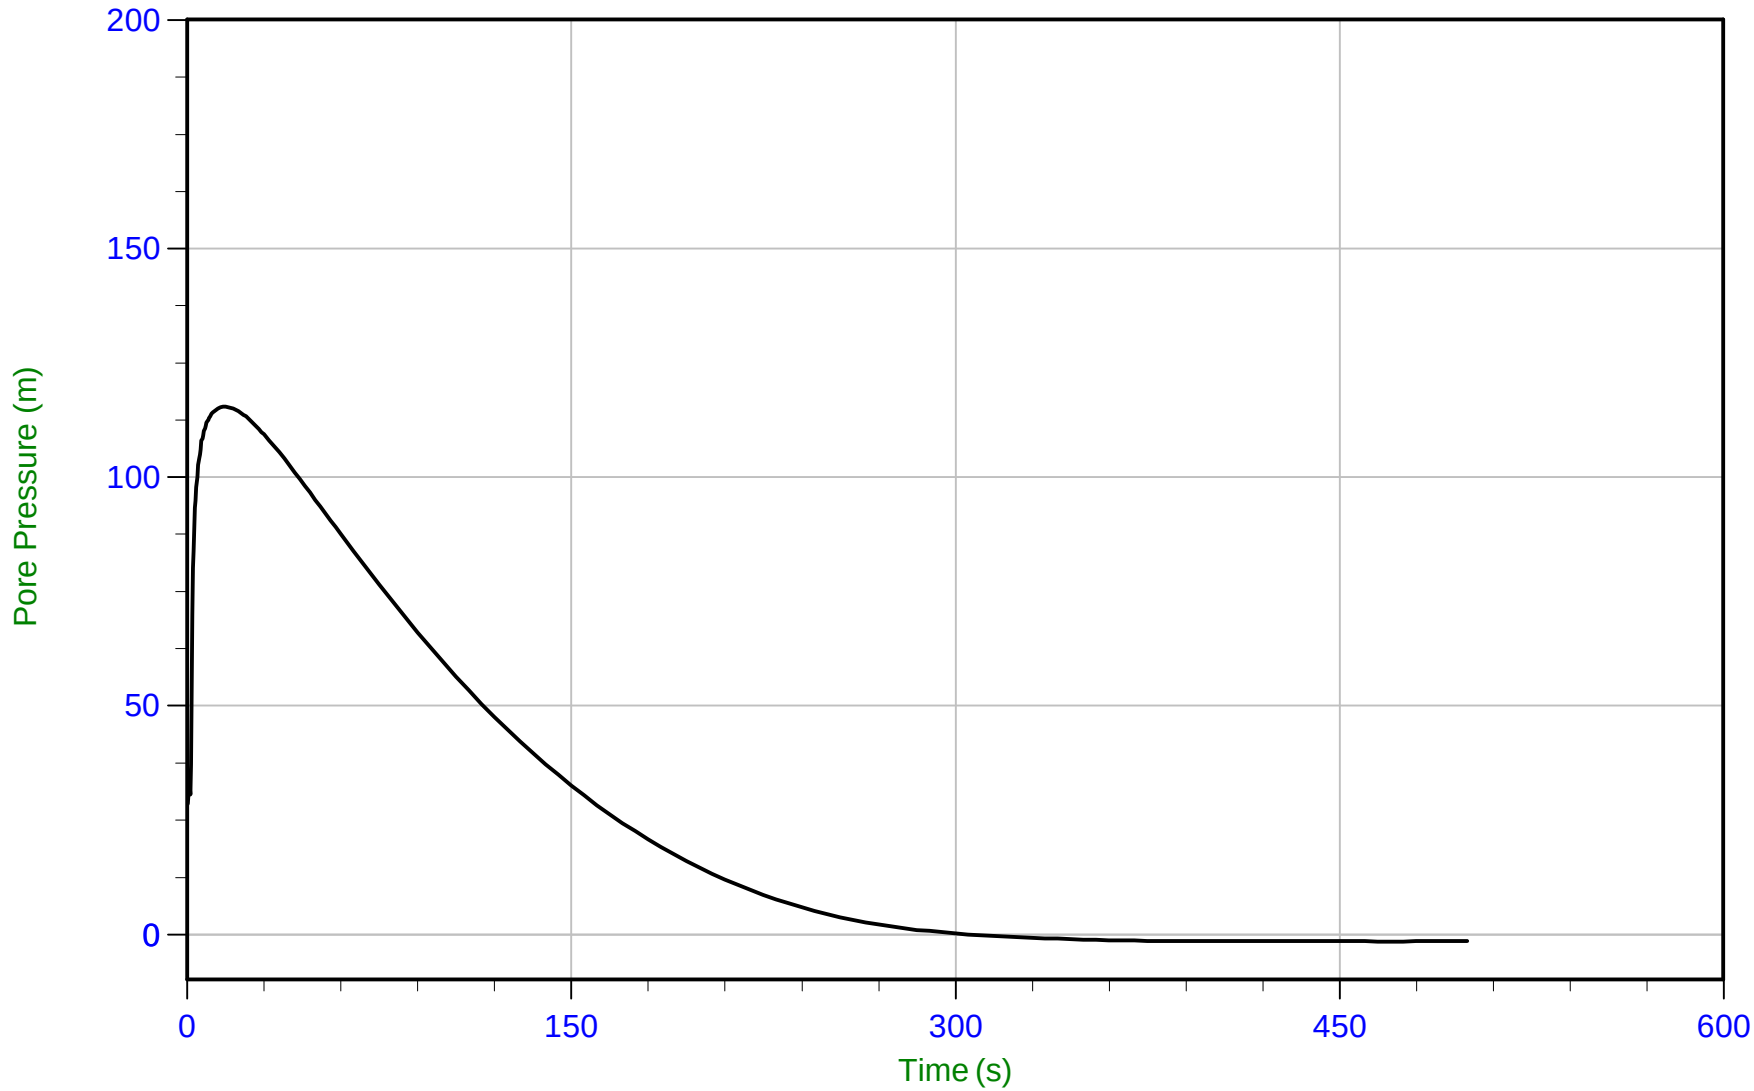

Trace Summary:

Filename: 22-02-23796_RS22-22CPT252.PPF
Depth: 9.825 m / 32.234 ft
Duration: 500.0 s


u Min: -1.6 m
u Max: 115.3 m
u Final: -1.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 07:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT253
Cone: 854:T1500F15U35 Area=15 cm²

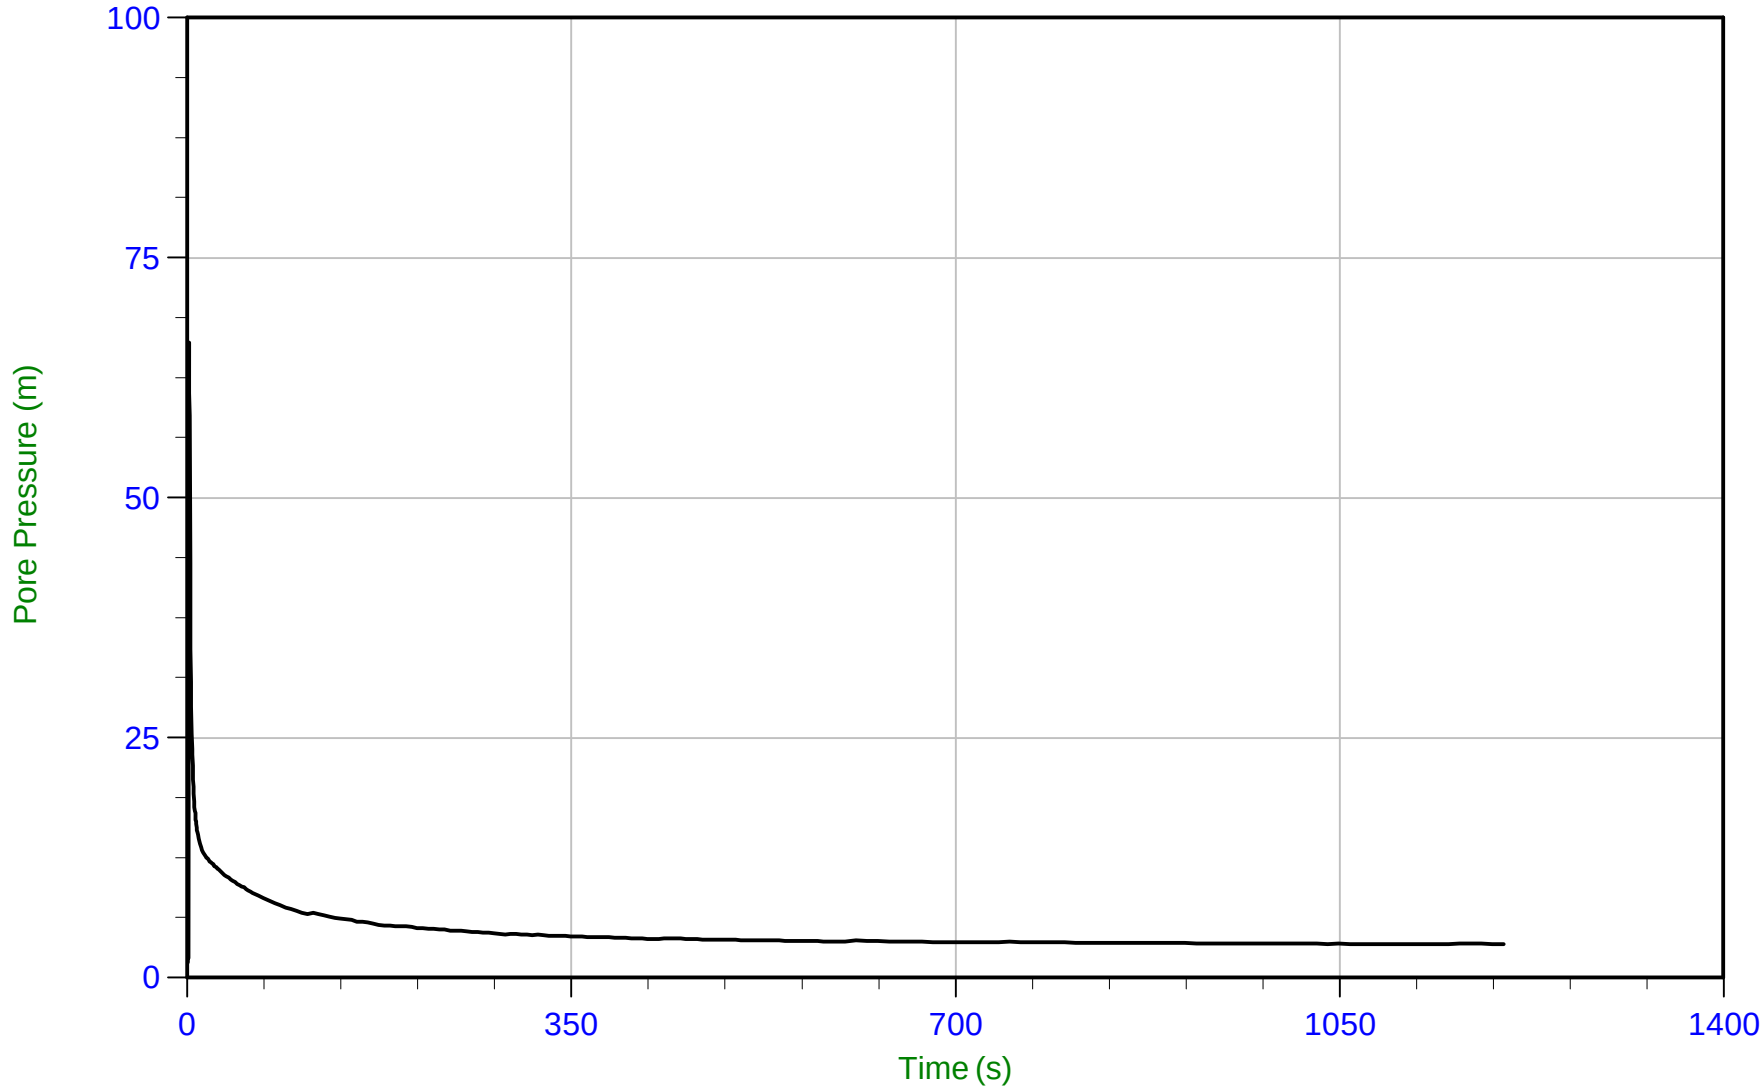

Trace Summary:

Filename: 22-02-23796_RP22_22CPT253.PPF
Depth: 4.850 m / 15.912 ft
Duration: 1200.0 s


u Min: 1.5 m
u Max: 66.2 m
u Final: 3.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 07:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT253
Cone: 854:T1500F15U35 Area=15 cm²

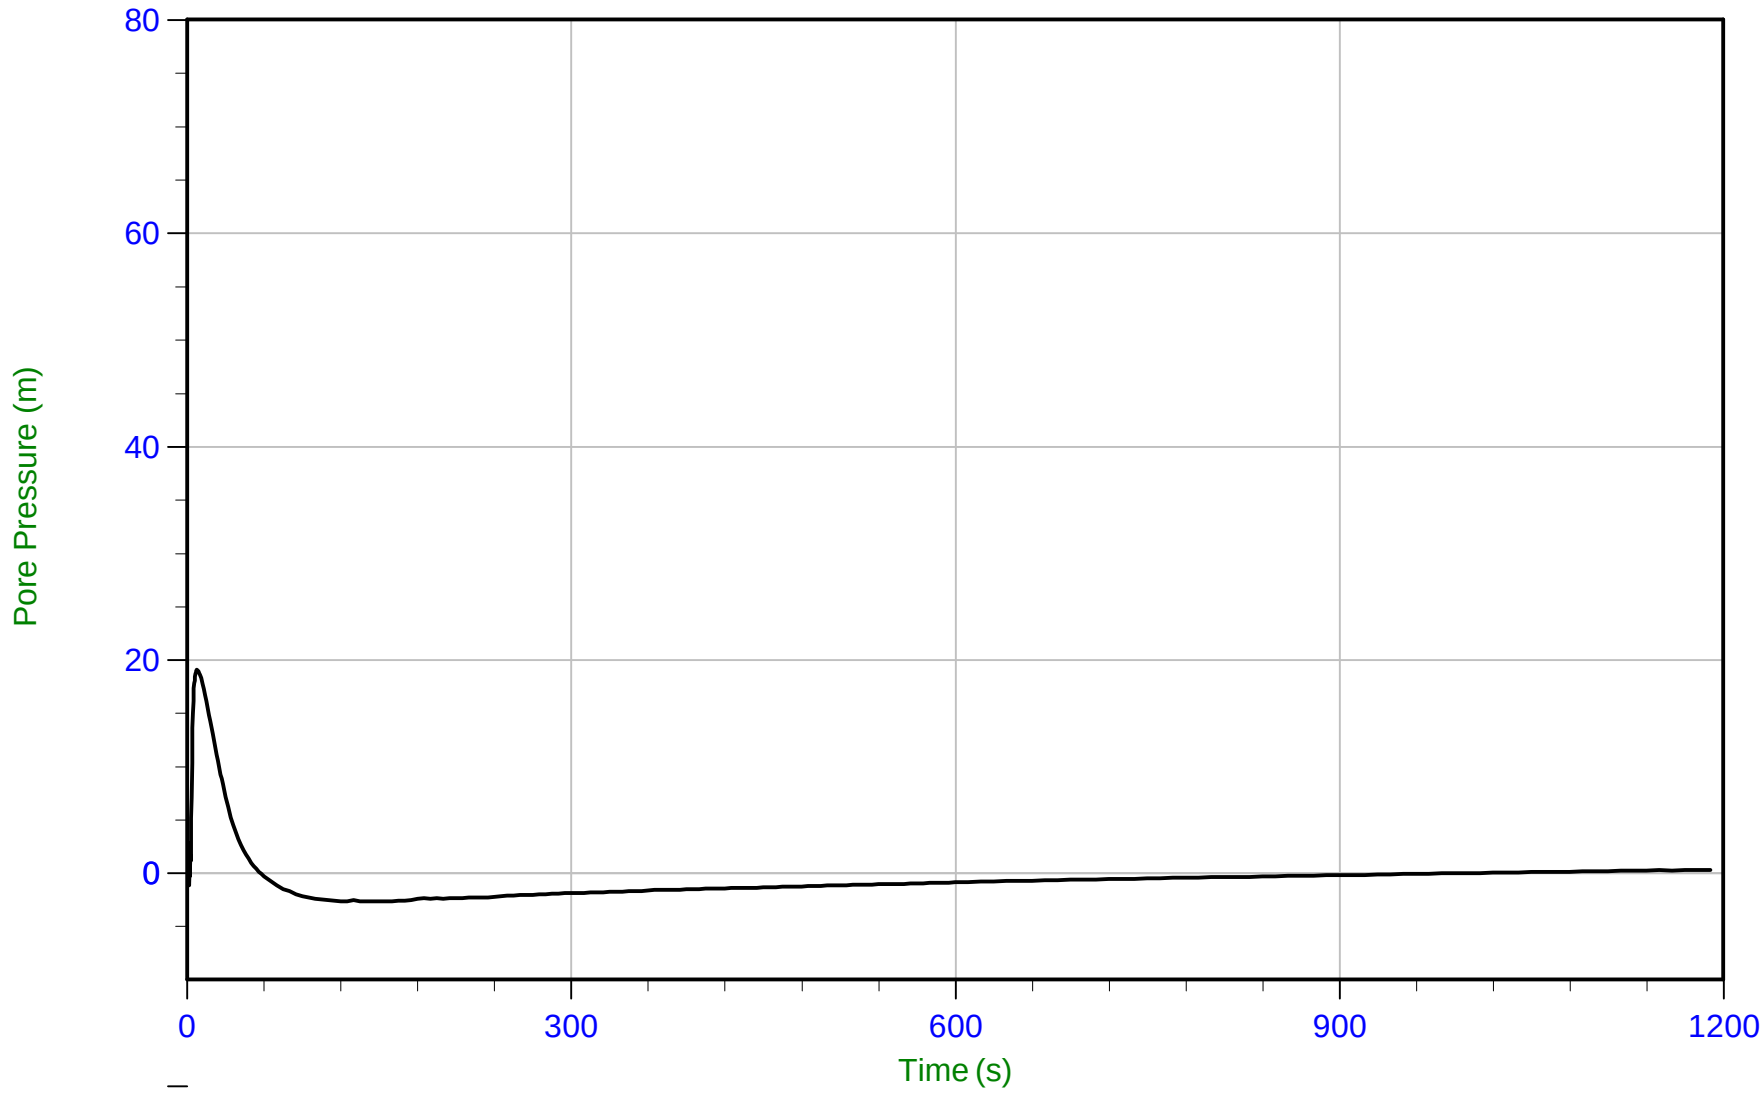

Trace Summary:

Filename: 22-02-23796_RP22_22CPT253.PPF
Depth: 12.025 m / 39.452 ft
Duration: 1190.0 s


u Min: -2.7 m
u Max: 19.1 m
u Final: 0.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 11:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT254
Cone: 854:T1500F15U35 Area=15 cm²

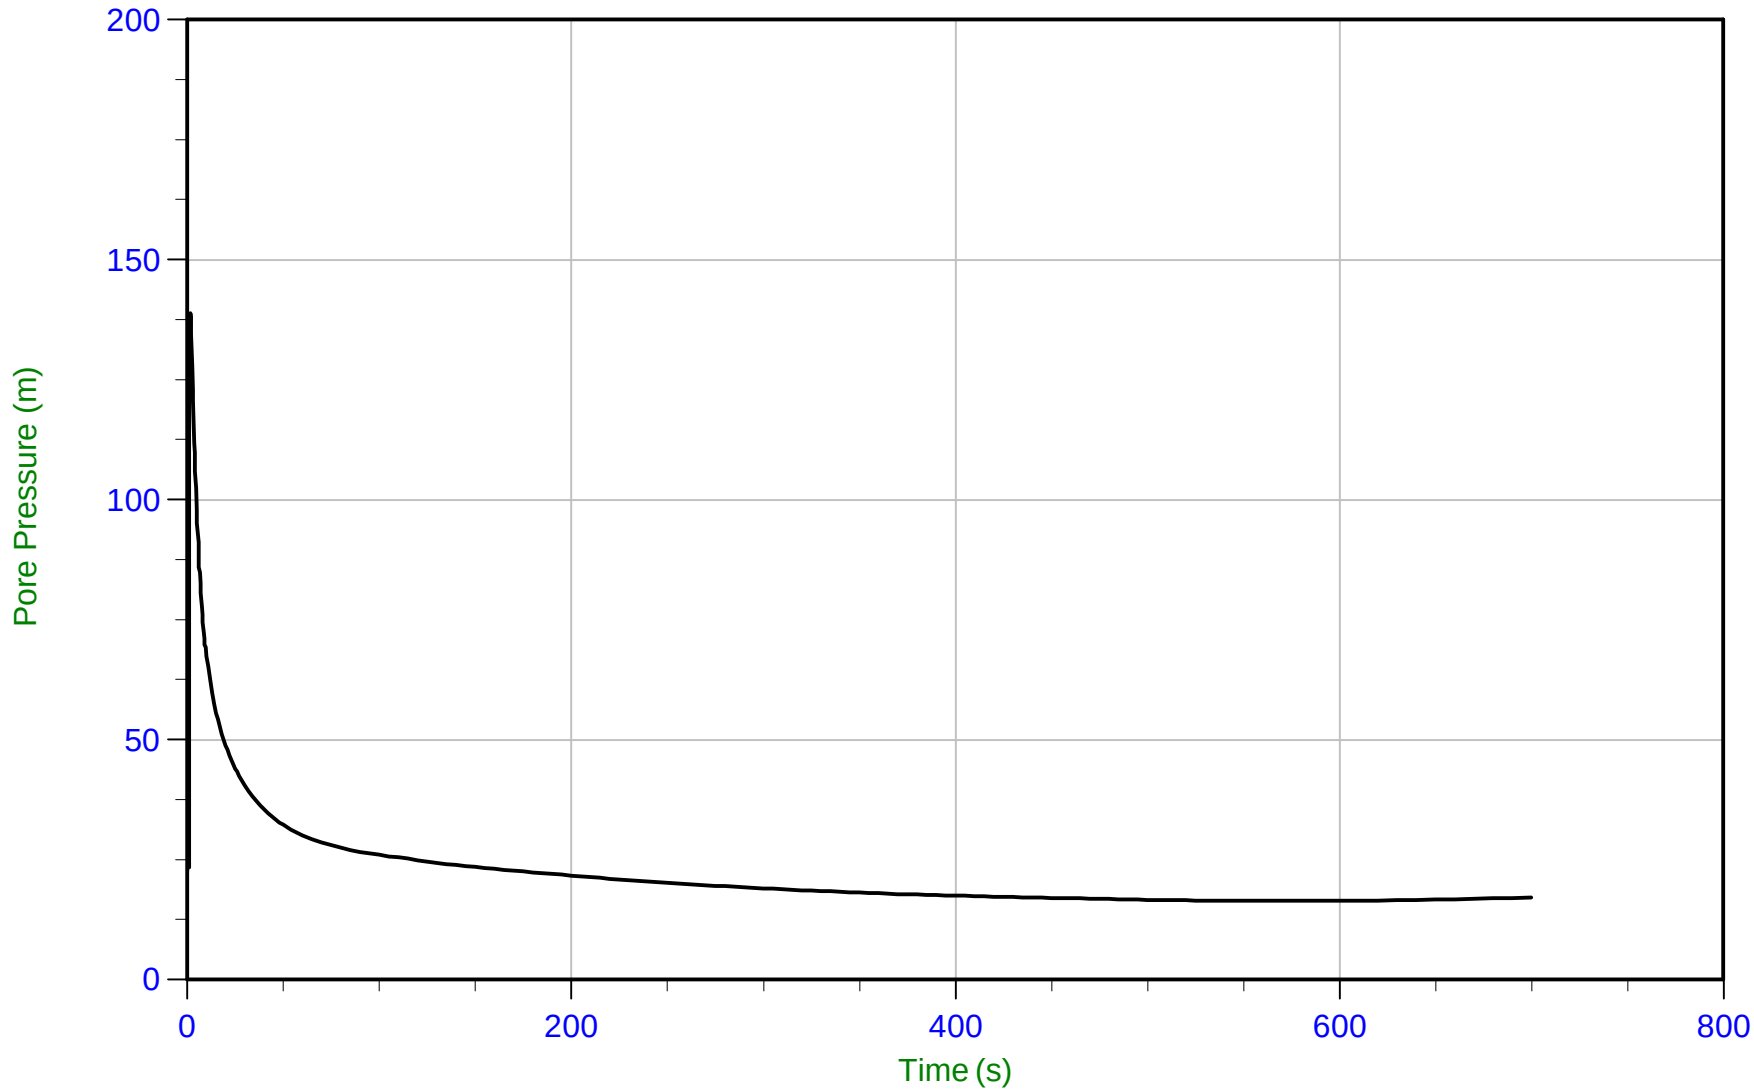

Trace Summary:

Filename: 22-02-23796_RP22-22CPT254.PPF
Depth: 4.900 m / 16.076 ft
Duration: 700.0 s


u Min: 16.4 m
u Max: 138.9 m
u Final: 17.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 11:23
Site: Brooks, Alberta

Sounding: RCPT22-22CPT254
Cone: 854:T1500F15U35 Area=15 cm²

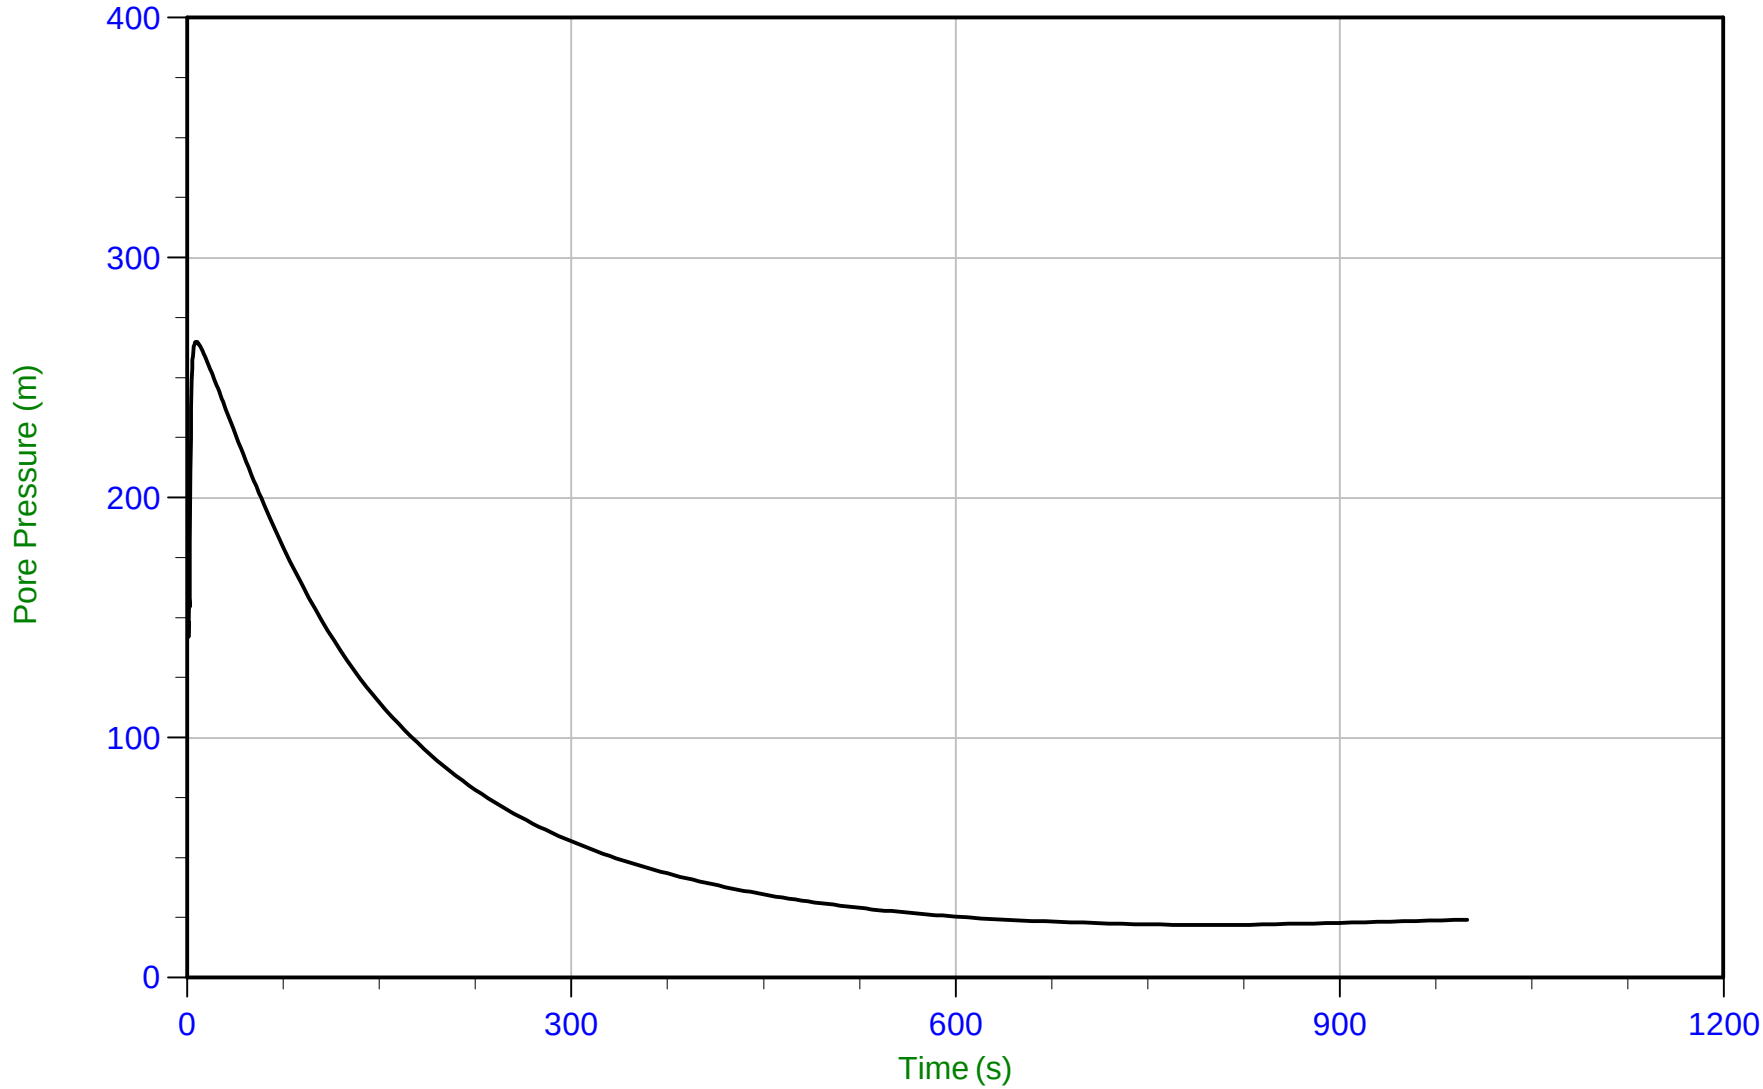

Trace Summary:

Filename: 22-02-23796_RP22-22CPT254.PPF
Depth: 12.025 m / 39.452 ft
Duration: 1000.0 s


u Min: 21.9 m
u Max: 265.0 m
u Final: 24.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 12:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT255
Cone: 854:T1500F15U35 Area=15 cm²

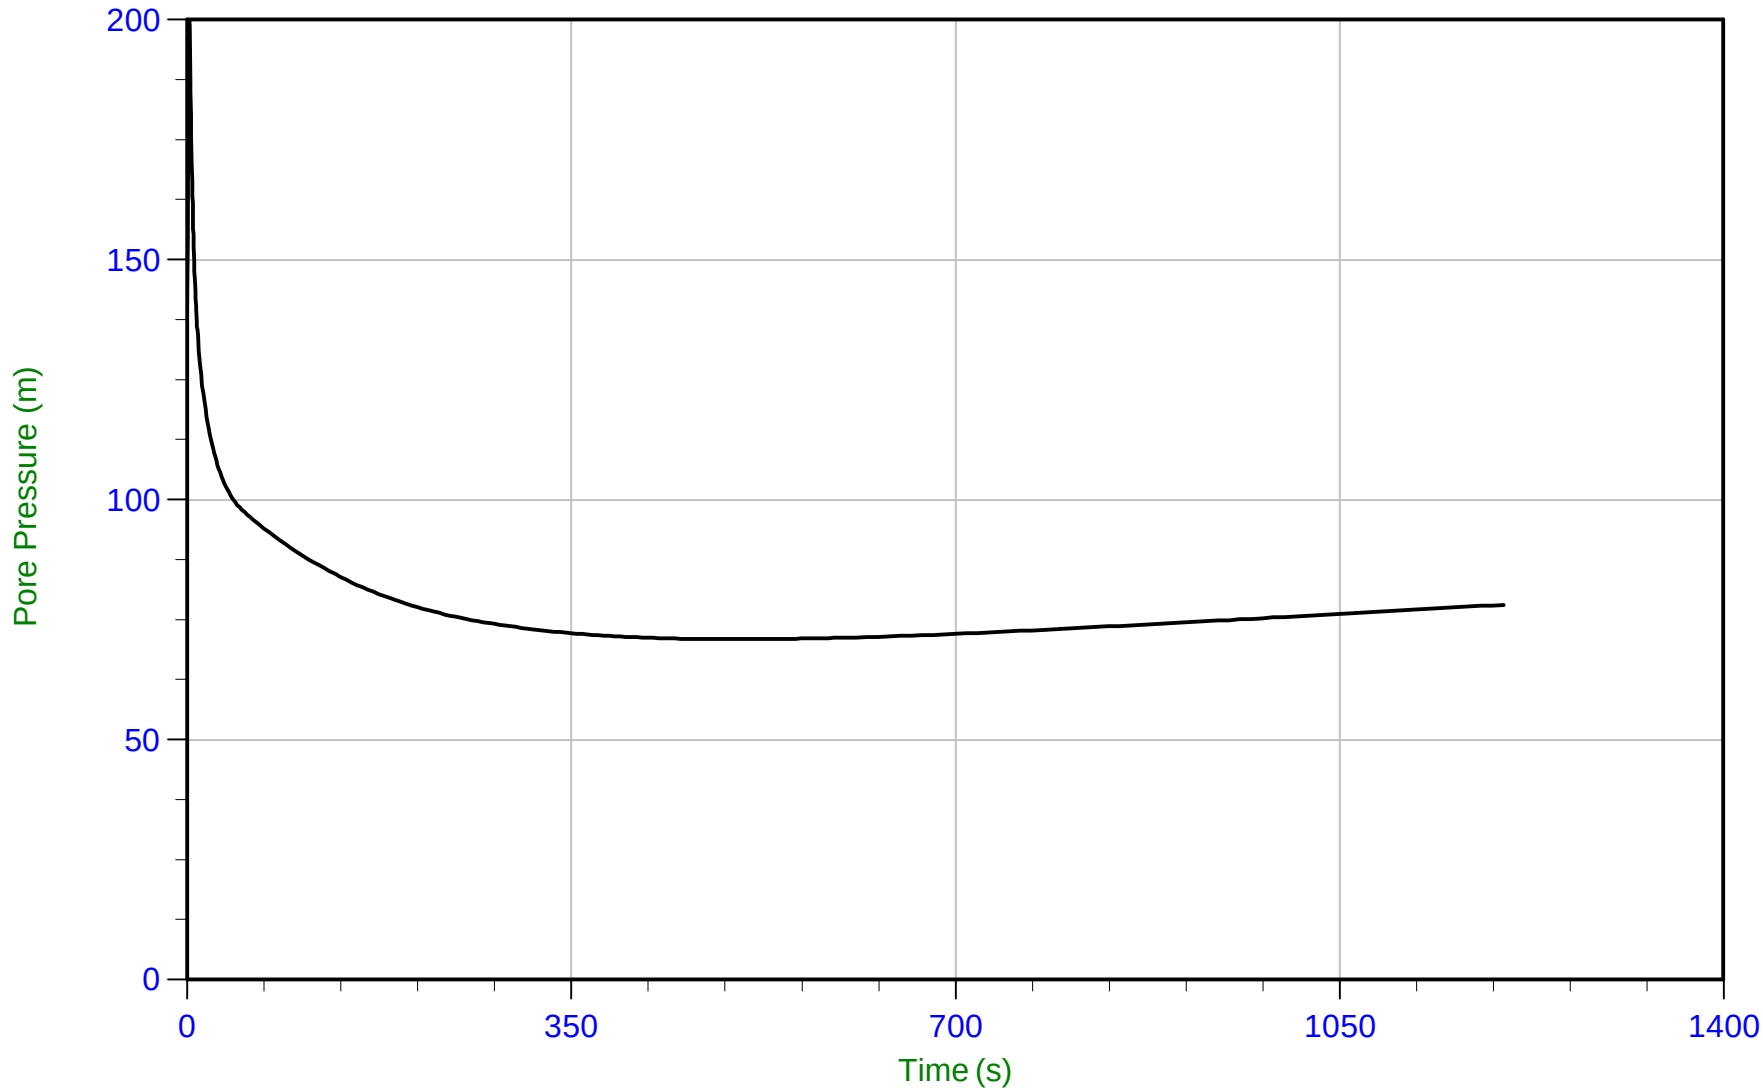

Trace Summary:

Filename: 22-02-23796_RP22-22CPT255.PPF
Depth: 6.875 m / 22.556 ft
Duration: 1200.0 s


u Min: 71.0 m
u Max: 206.7 m
u Final: 78.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 13:54
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT256
Cone: 854:T1500F15U35 Area=15 cm²

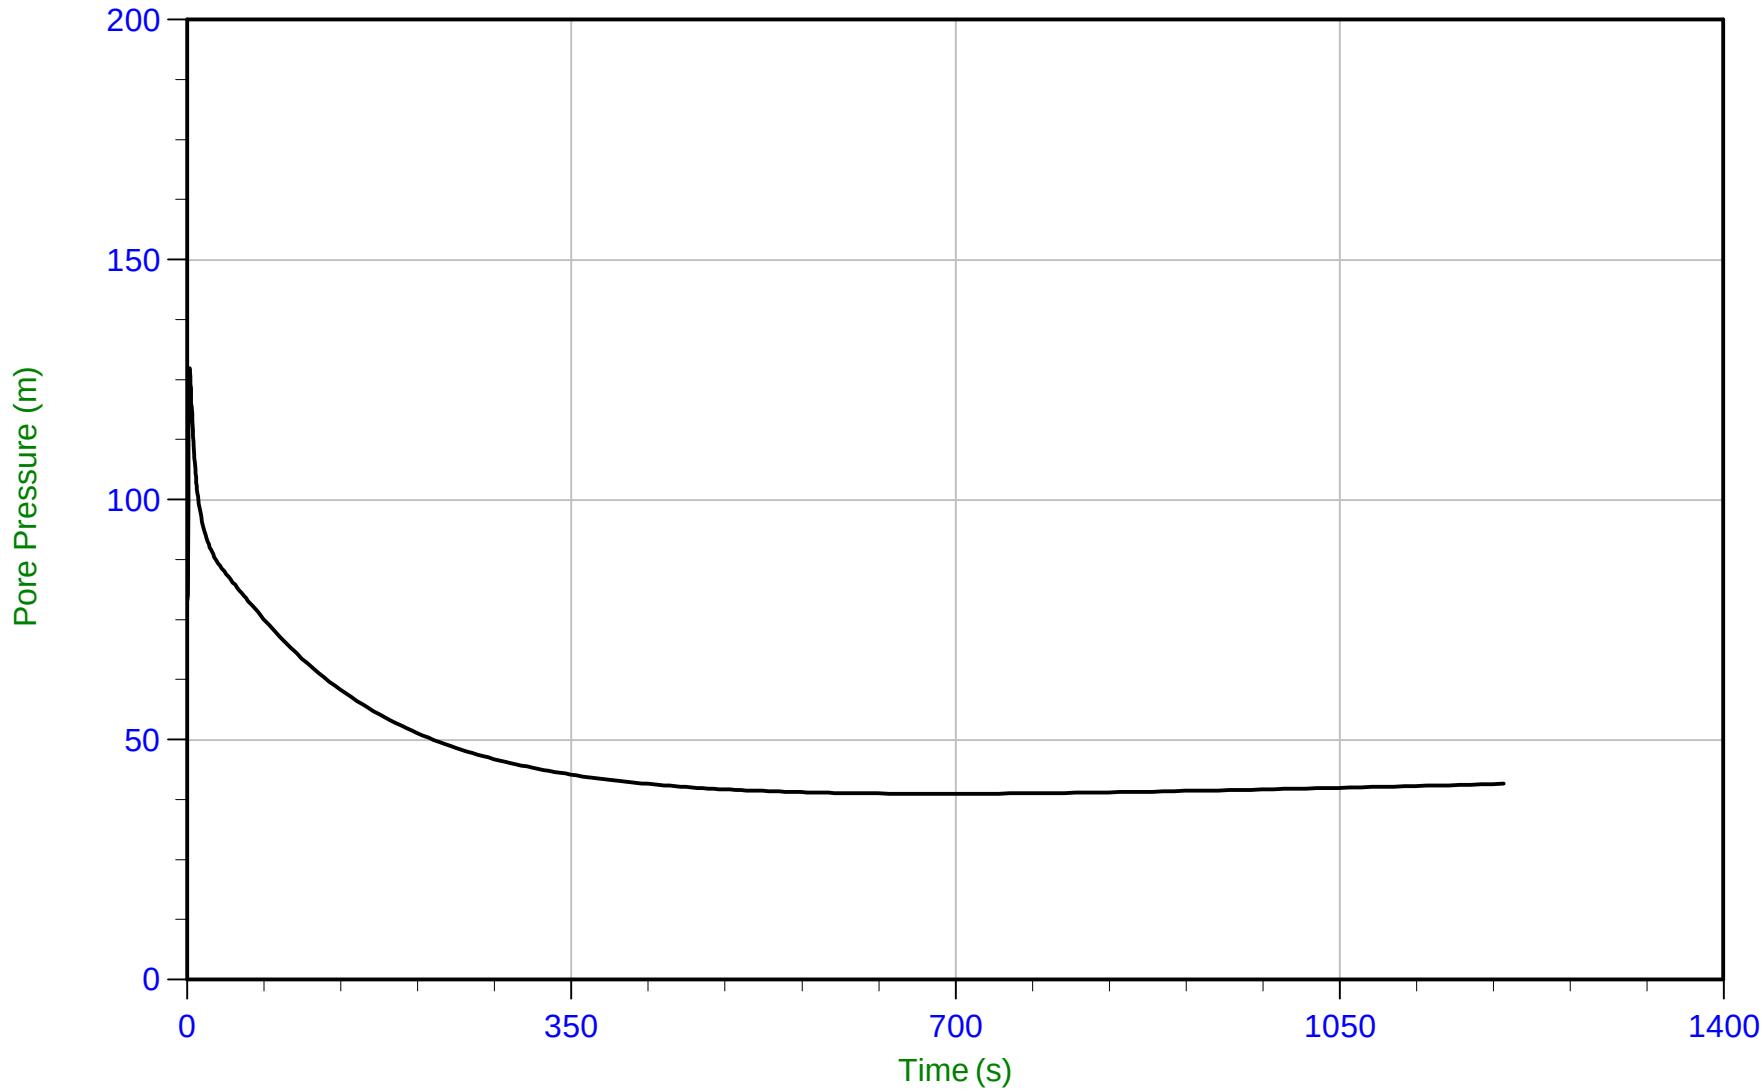

Trace Summary:

Filename: 22-02-23796_RS22-22CPT256.PPF
Depth: 7.525 m / 24.688 ft
Duration: 1200.0 s


u Min: 38.8 m
u Max: 127.3 m
u Final: 40.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 15:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT257
Cone: 854:T1500F15U35 Area=15 cm²

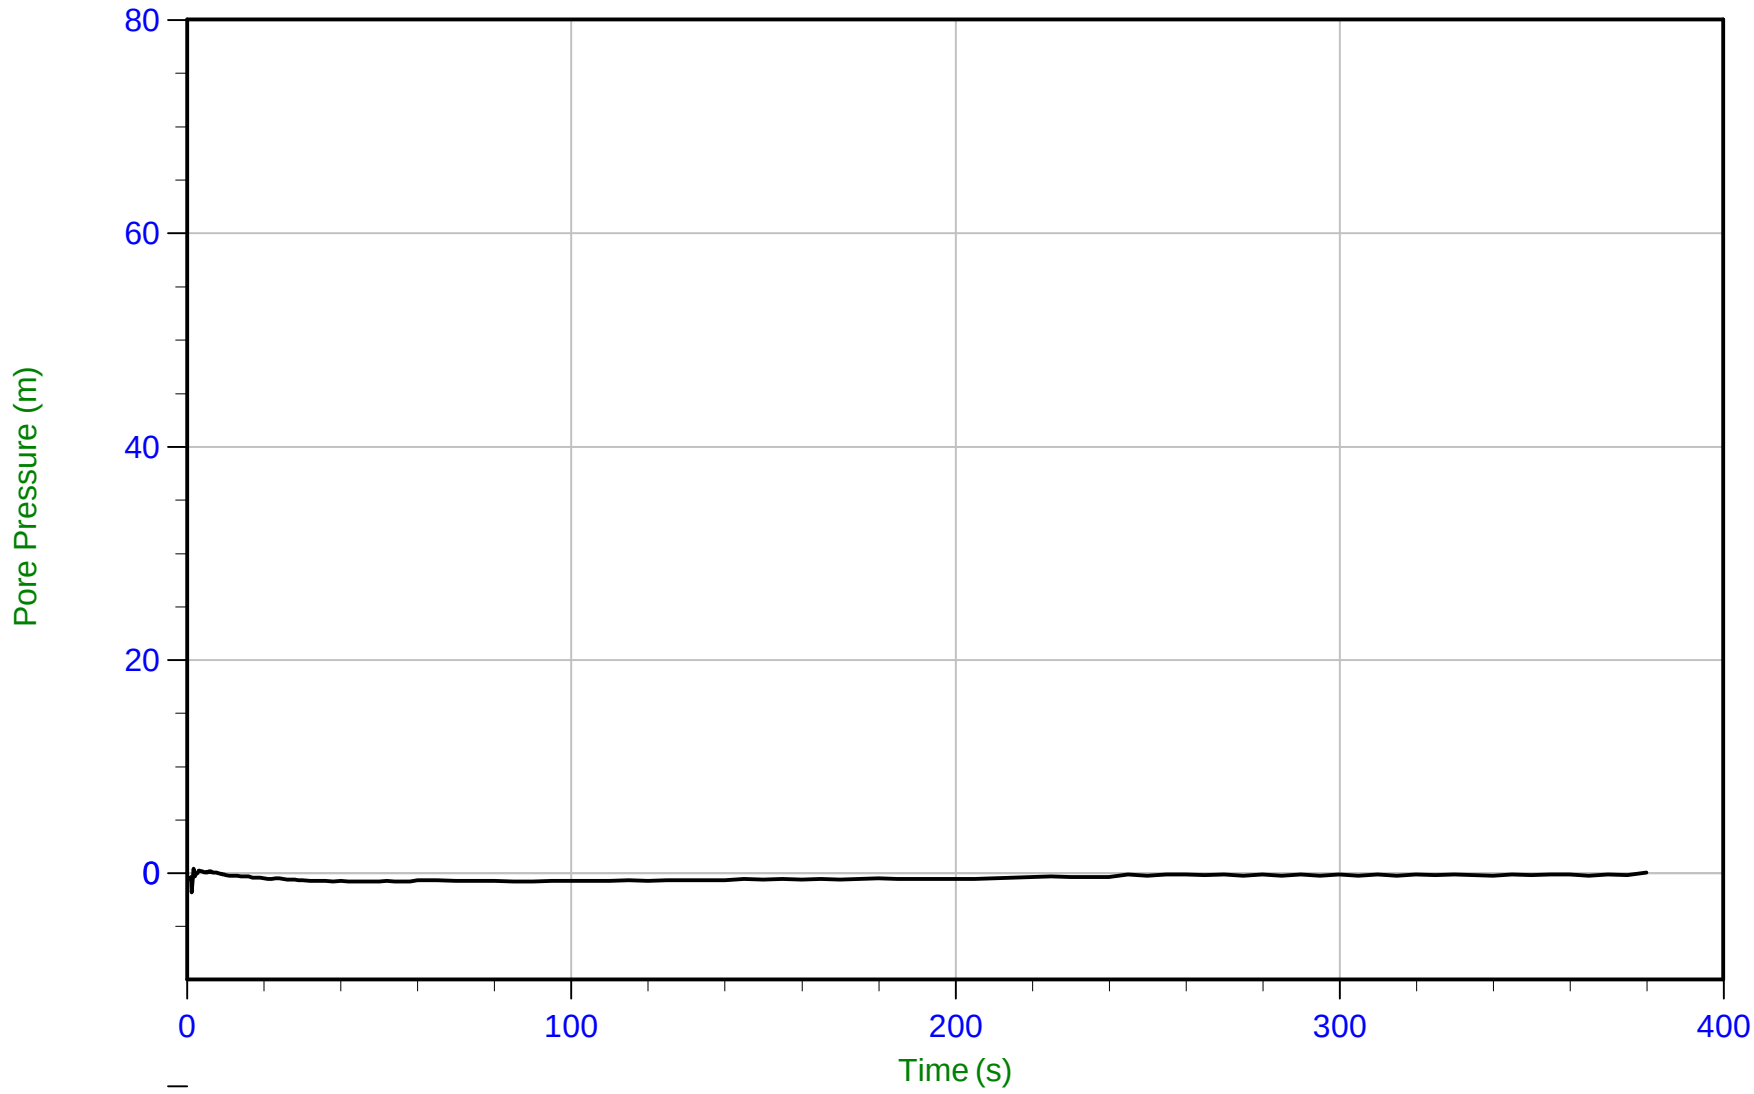

Trace Summary:

Filename: 22-02-23796_RP22-22CPT257.PPF
Depth: 2.625 m / 8.612 ft
Duration: 380.0 s


u Min: -1.8 m
u Max: 0.4 m
u Final: 0.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 15:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT257
Cone: 854:T1500F15U35 Area=15 cm²

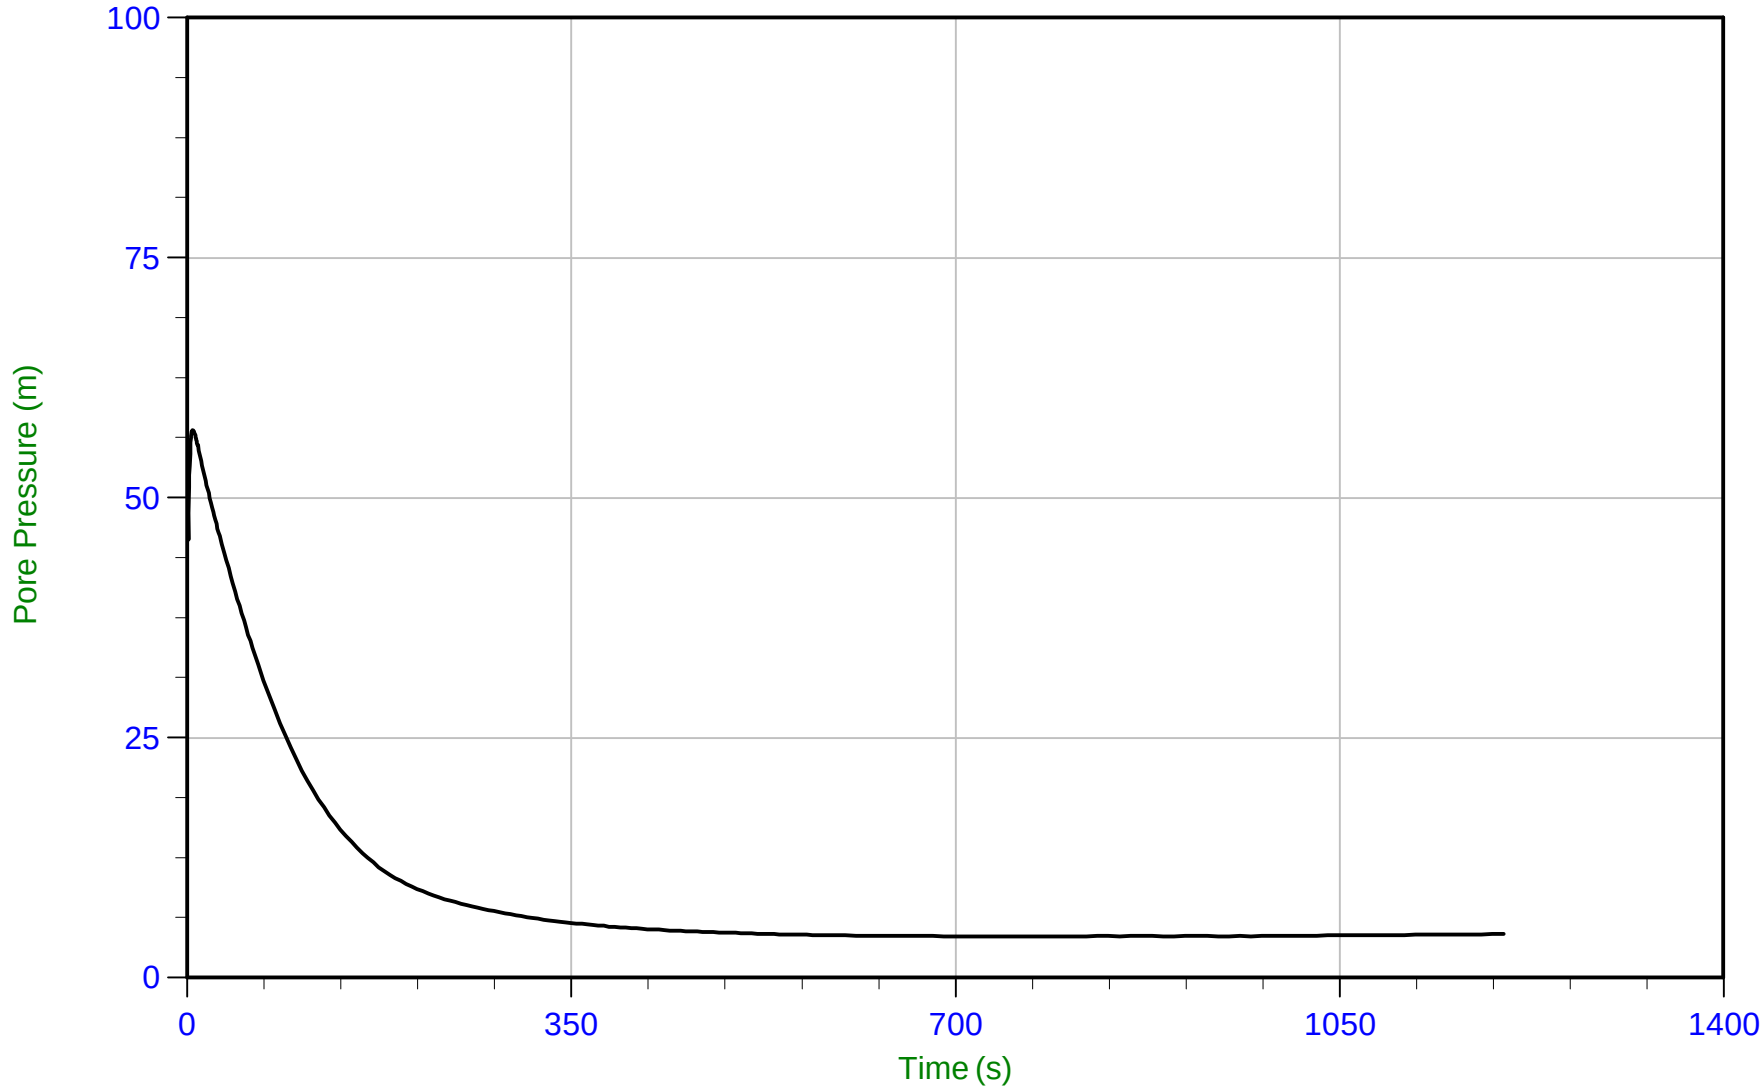

Trace Summary:

Filename: 22-02-23796_RP22-22CPT257.PPF
Depth: 8.275 m / 27.149 ft
Duration: 1200.0 s


u Min: 4.3 m
u Max: 57.0 m
u Final: 4.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 16:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT258
Cone: 854:T1500F15U35 Area=15 cm²

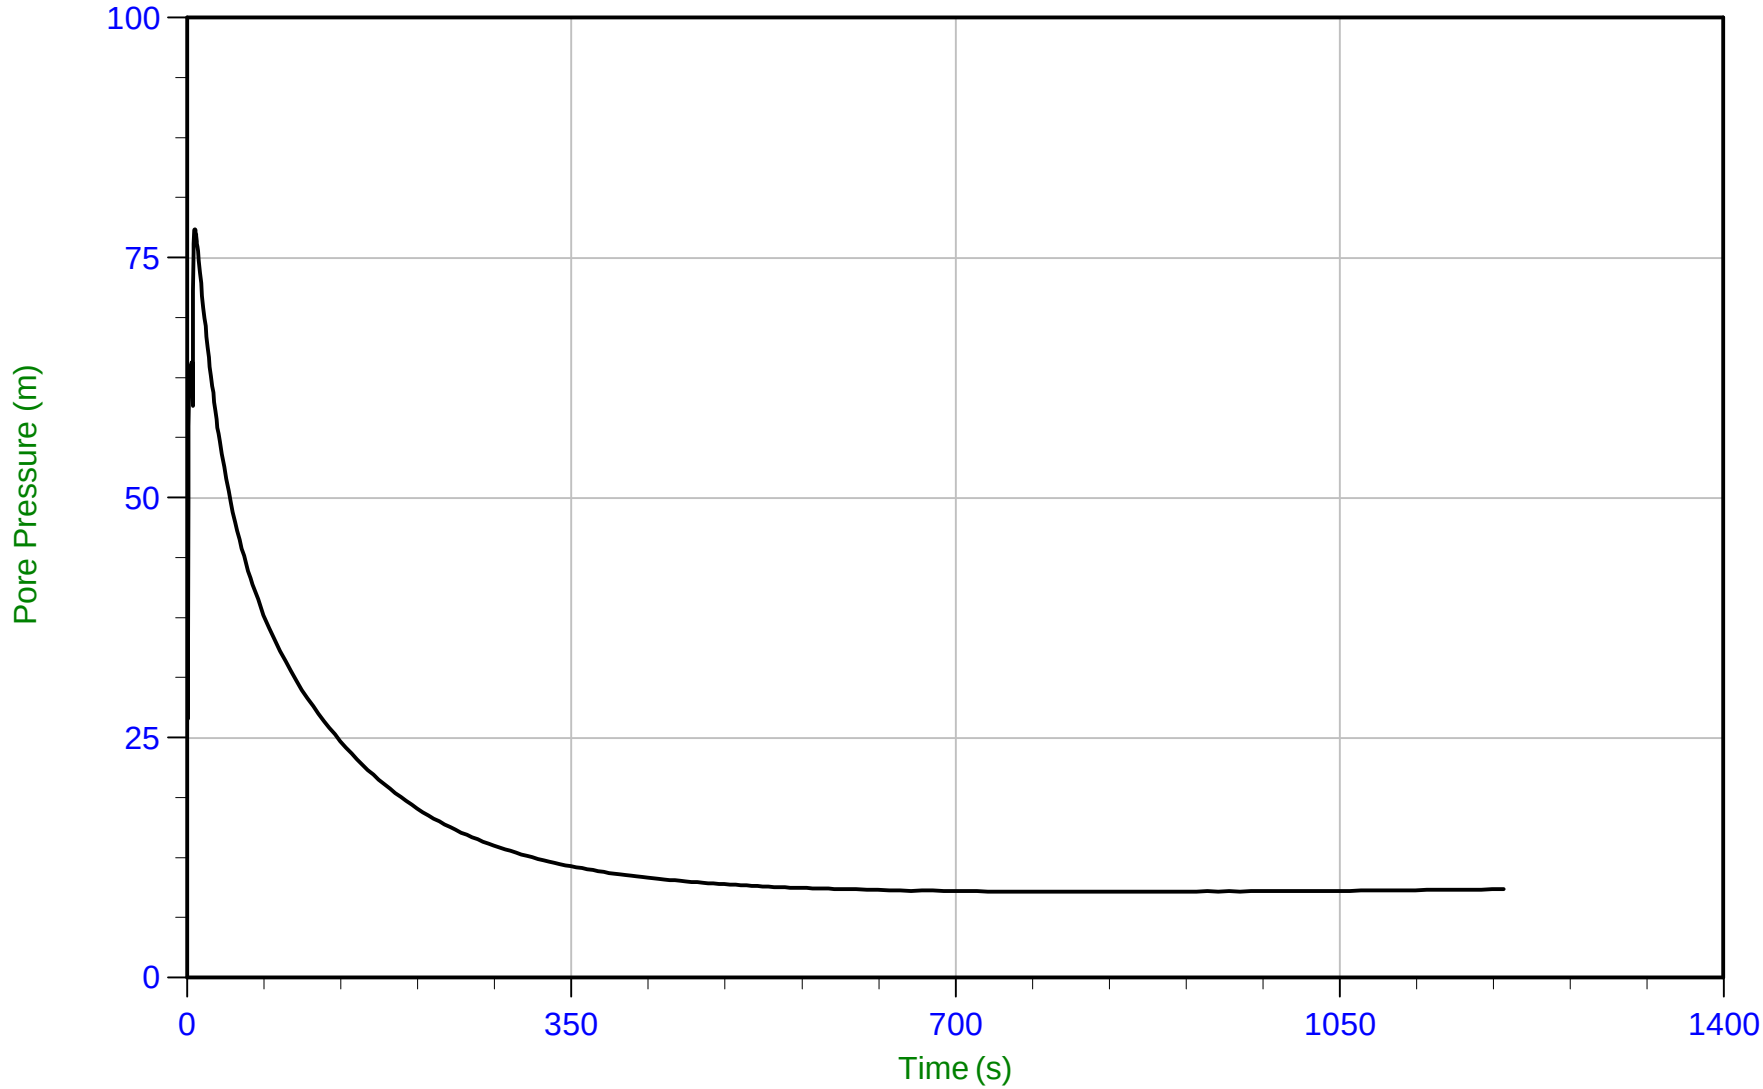

Trace Summary:

Filename: 22-02-23796_RP22-22CPT258.PPF
Depth: 6.500 m / 21.325 ft
Duration: 1200.0 s


u Min: 8.9 m
u Max: 78.0 m
u Final: 9.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 14:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT259
Cone: 854:T1500F15U35 Area=15 cm²

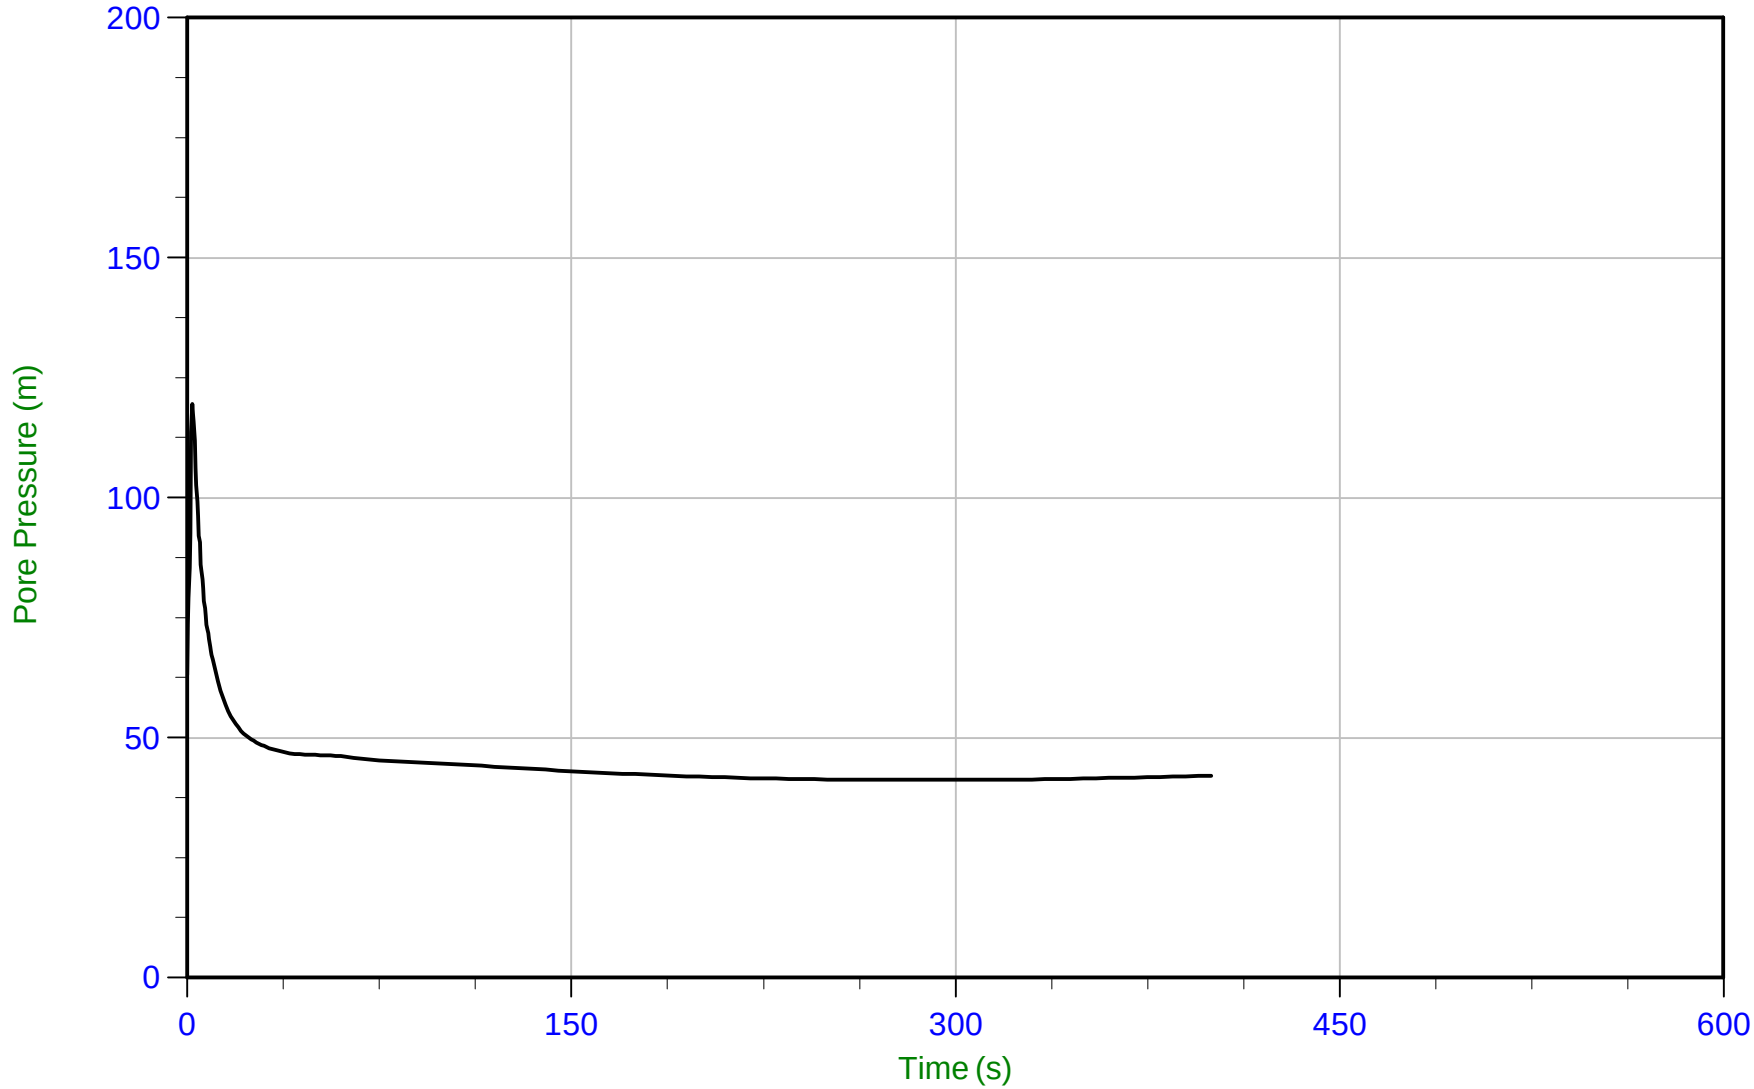

Trace Summary:

Filename: 22-02-23796_RP22-22CPT259.PPF
Depth: 5.900 m / 19.357 ft
Duration: 400.0 s


u Min: 41.2 m
u Max: 119.6 m
u Final: 42.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 14:45
Site: Brooks, Alberta

Sounding: RCPT22-22CPT259
Cone: 854:T1500F15U35 Area=15 cm²

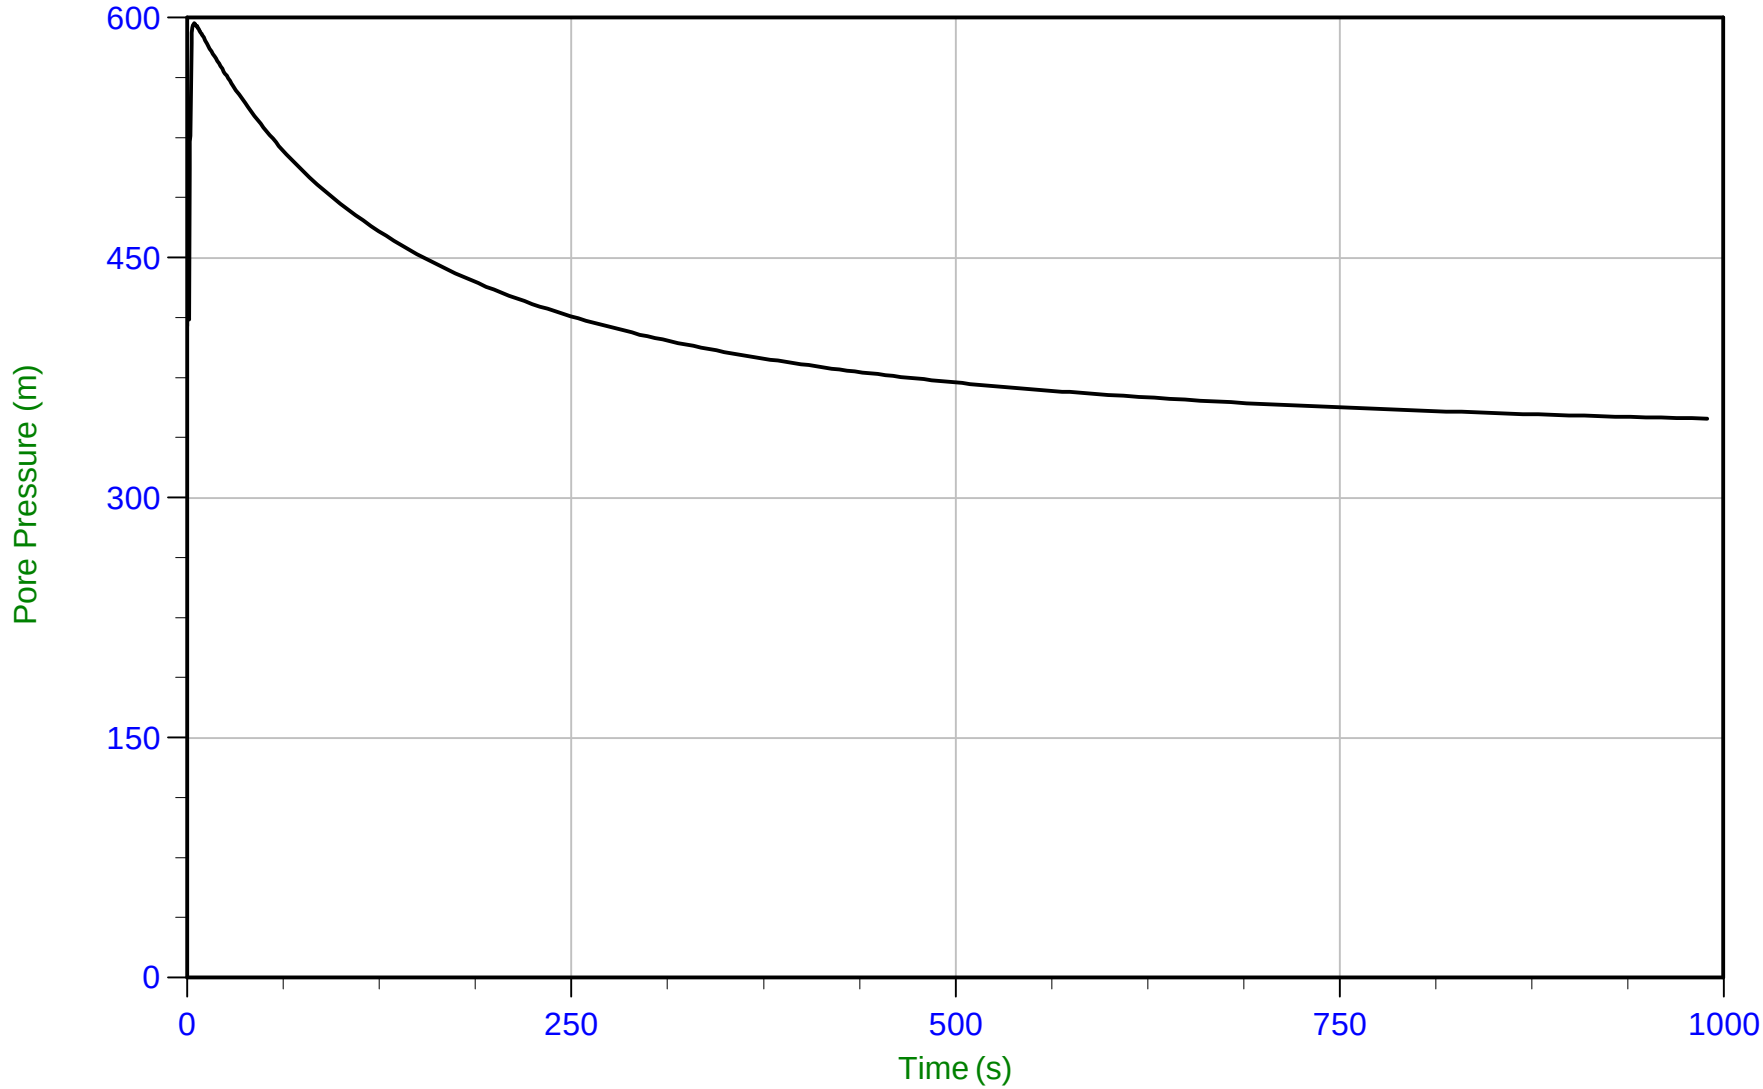

Trace Summary:

Filename: 22-02-23796_RP22-22CPT259.PPF
Depth: 8.250 m / 27.067 ft
Duration: 990.0 s


u Min: 349.4 m
u Max: 596.5 m
u Final: 349.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 17:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT260
Cone: 854:T1500F15U35 Area=15 cm²

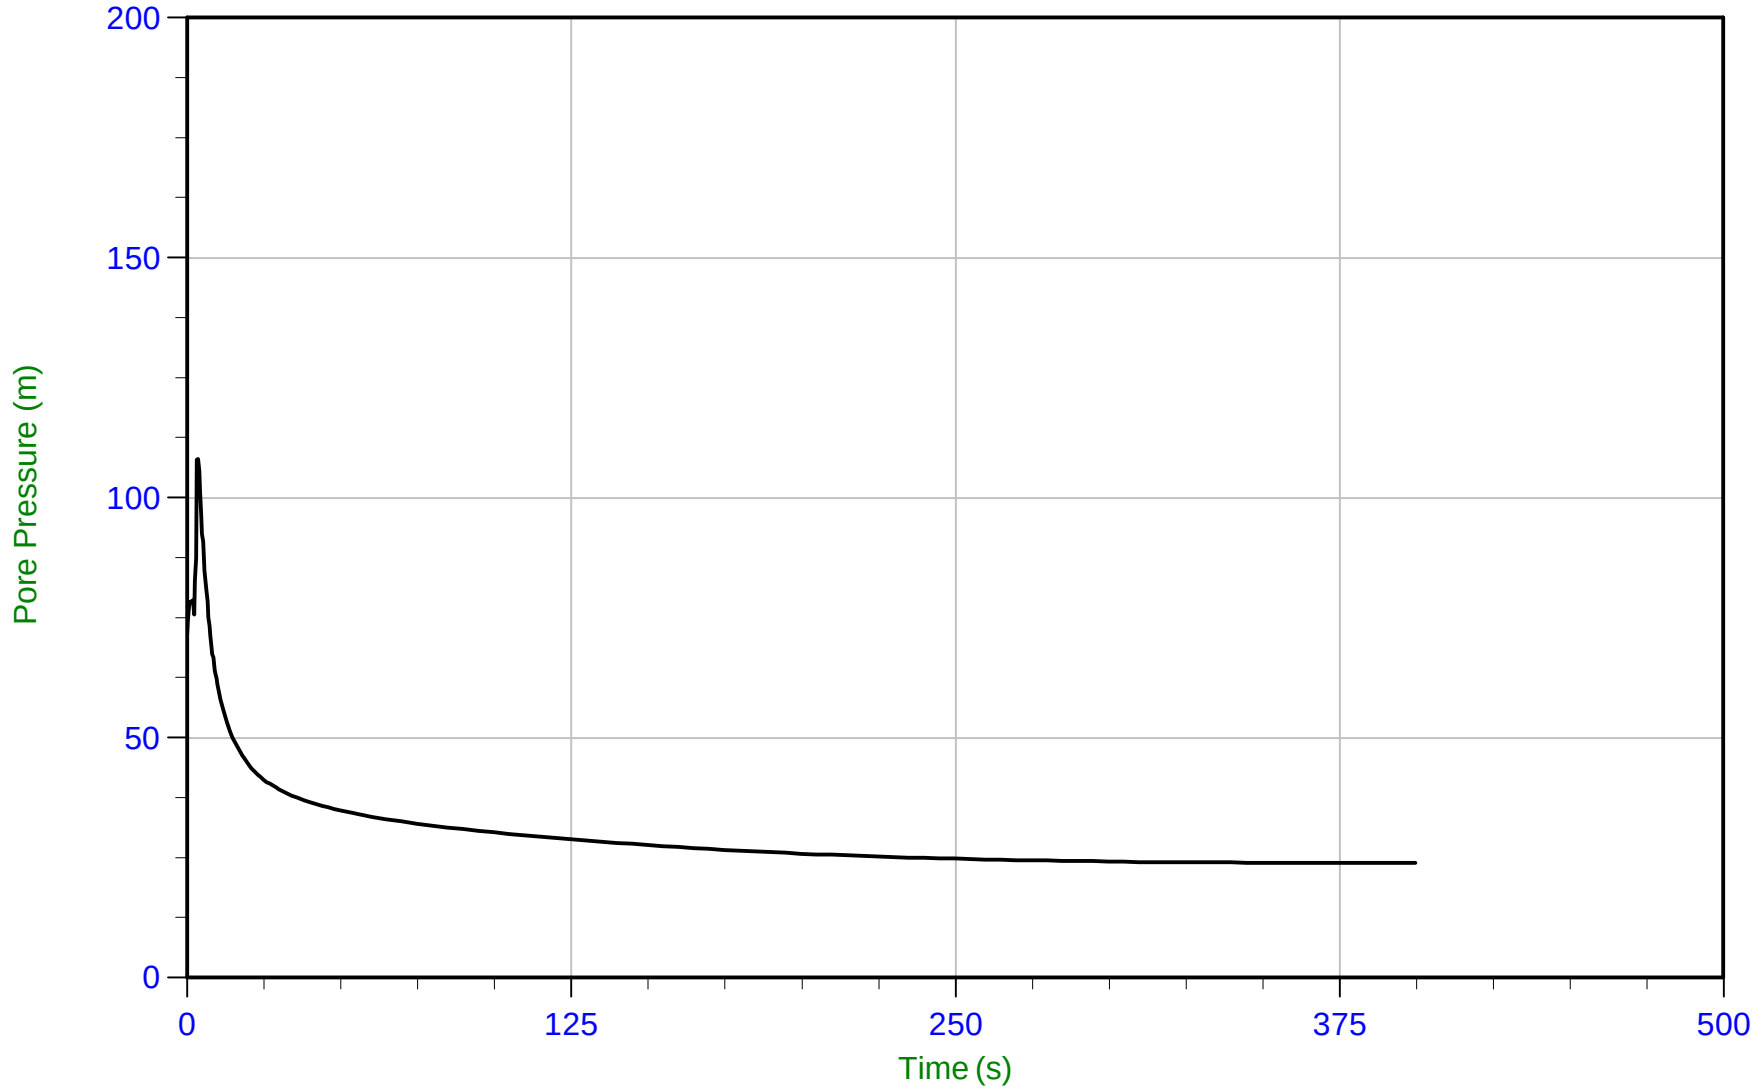

Trace Summary:

Filename: 22-02-23796_RP22-22CPT260.PPF
Depth: 4.825 m / 15.830 ft
Duration: 400.0 s


u Min: 23.9 m
u Max: 108.0 m
u Final: 23.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/25/2022 17:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT260
Cone: 854:T1500F15U35 Area=15 cm²

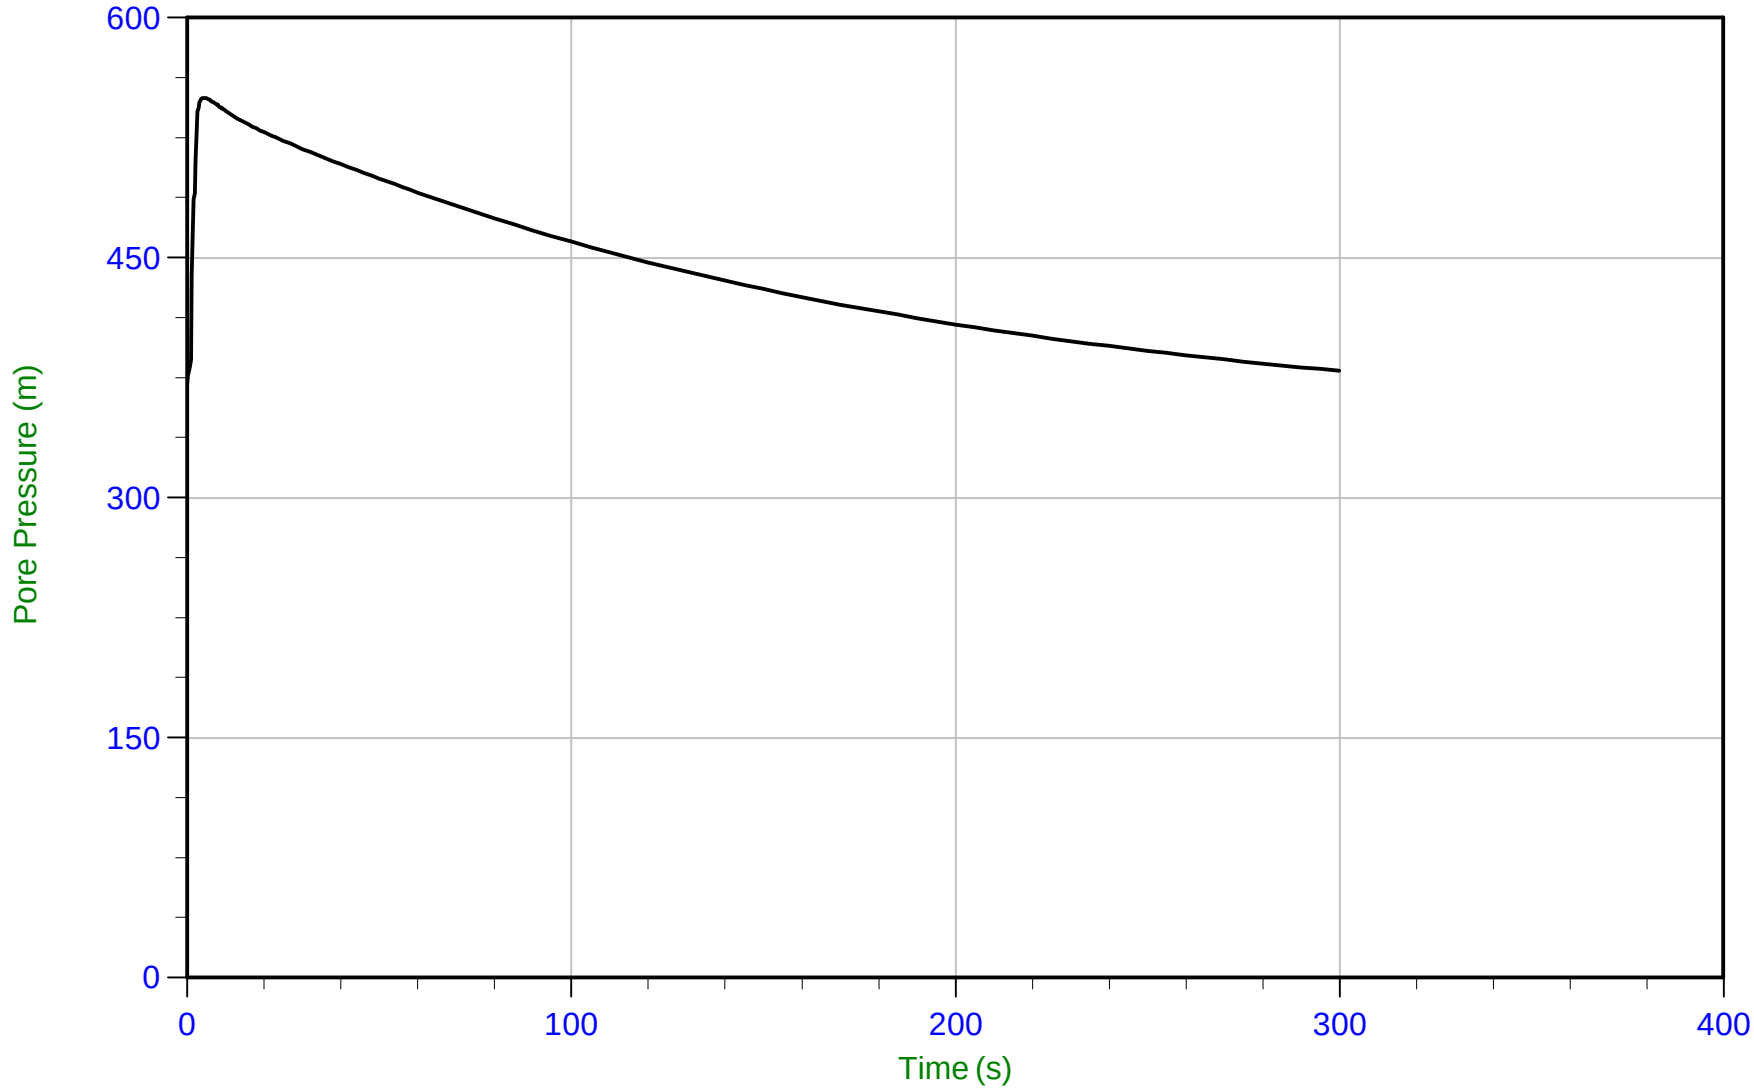

Trace Summary:

Filename: 22-02-23796_RP22-22CPT260.PPF
Depth: 7.825 m / 25.672 ft
Duration: 300.0 s


u Min: 371.1 m
u Max: 550.0 m
u Final: 379.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 13:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT261
Cone: 821:T1000F10U35 Area=15 cm²

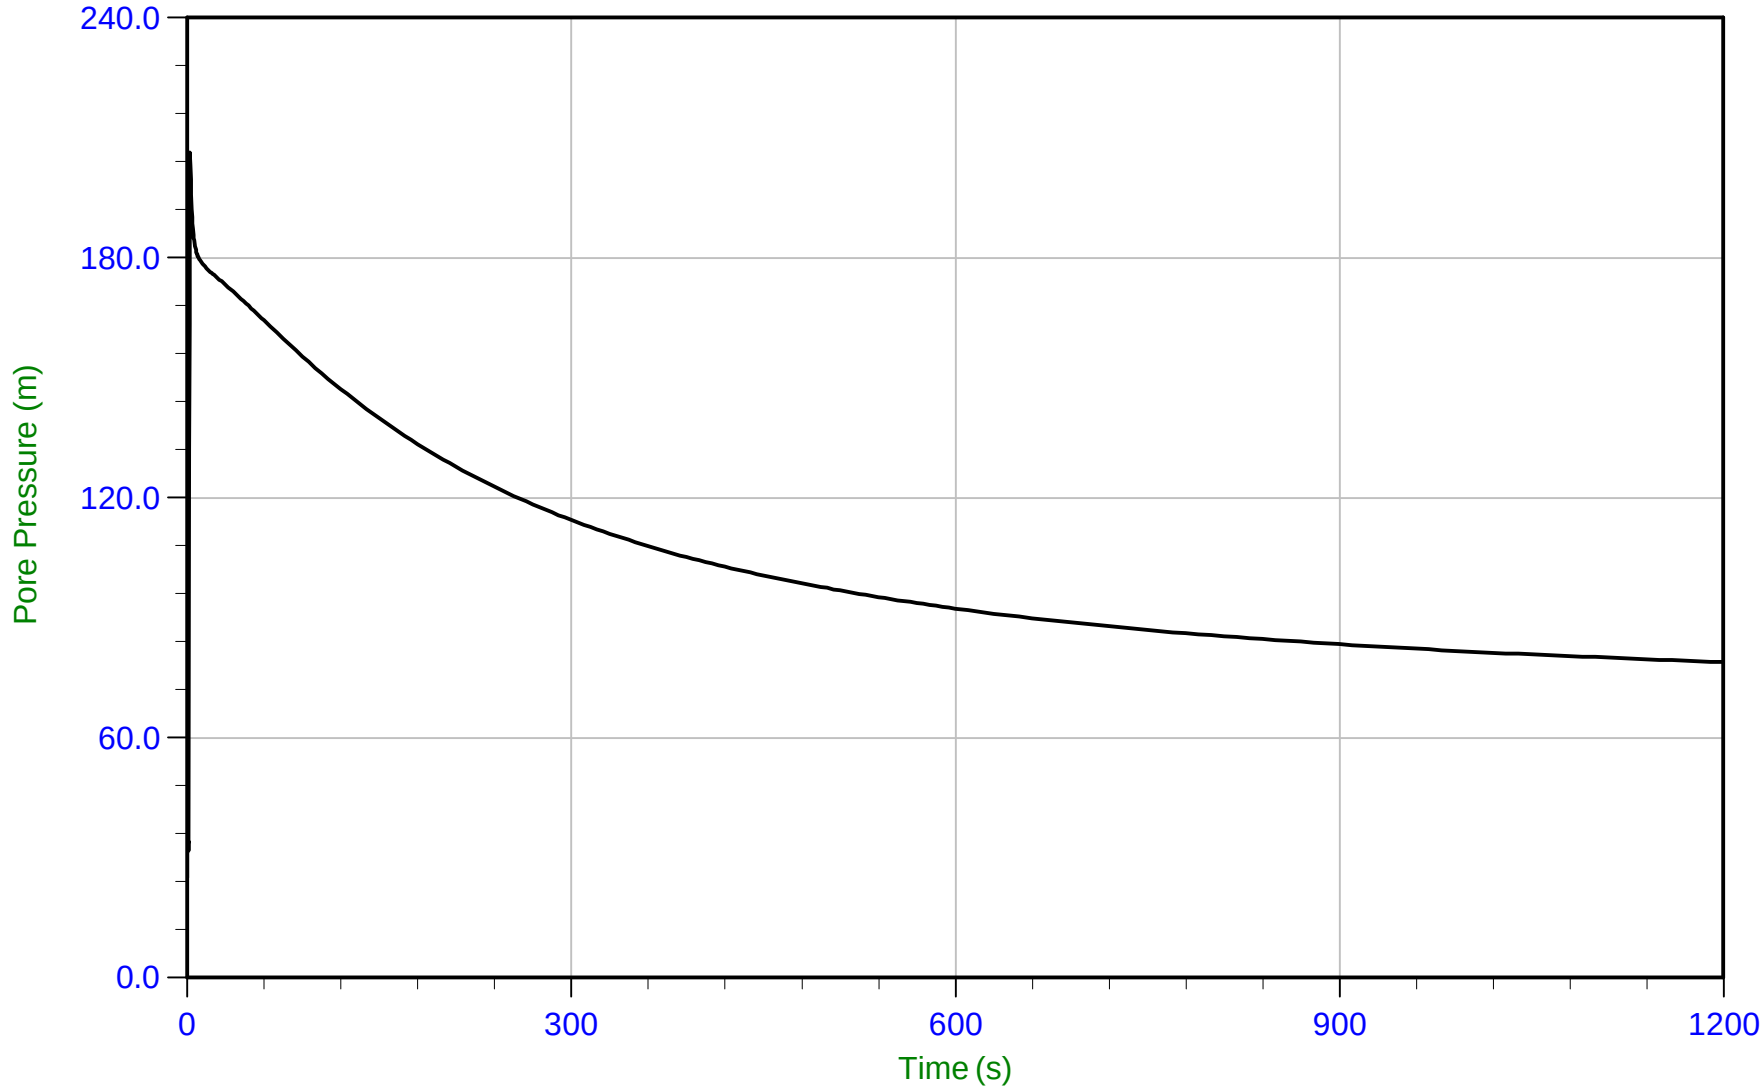

Trace Summary:

Filename: 22-02-23796_RP22-22CPT261.PPF
Depth: 4.850 m / 15.912 ft
Duration: 1200.0 s


u Min: 25.1 m
u Max: 206.3 m
u Final: 78.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 13:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT261
Cone: 821:T1000F10U35 Area=15 cm²

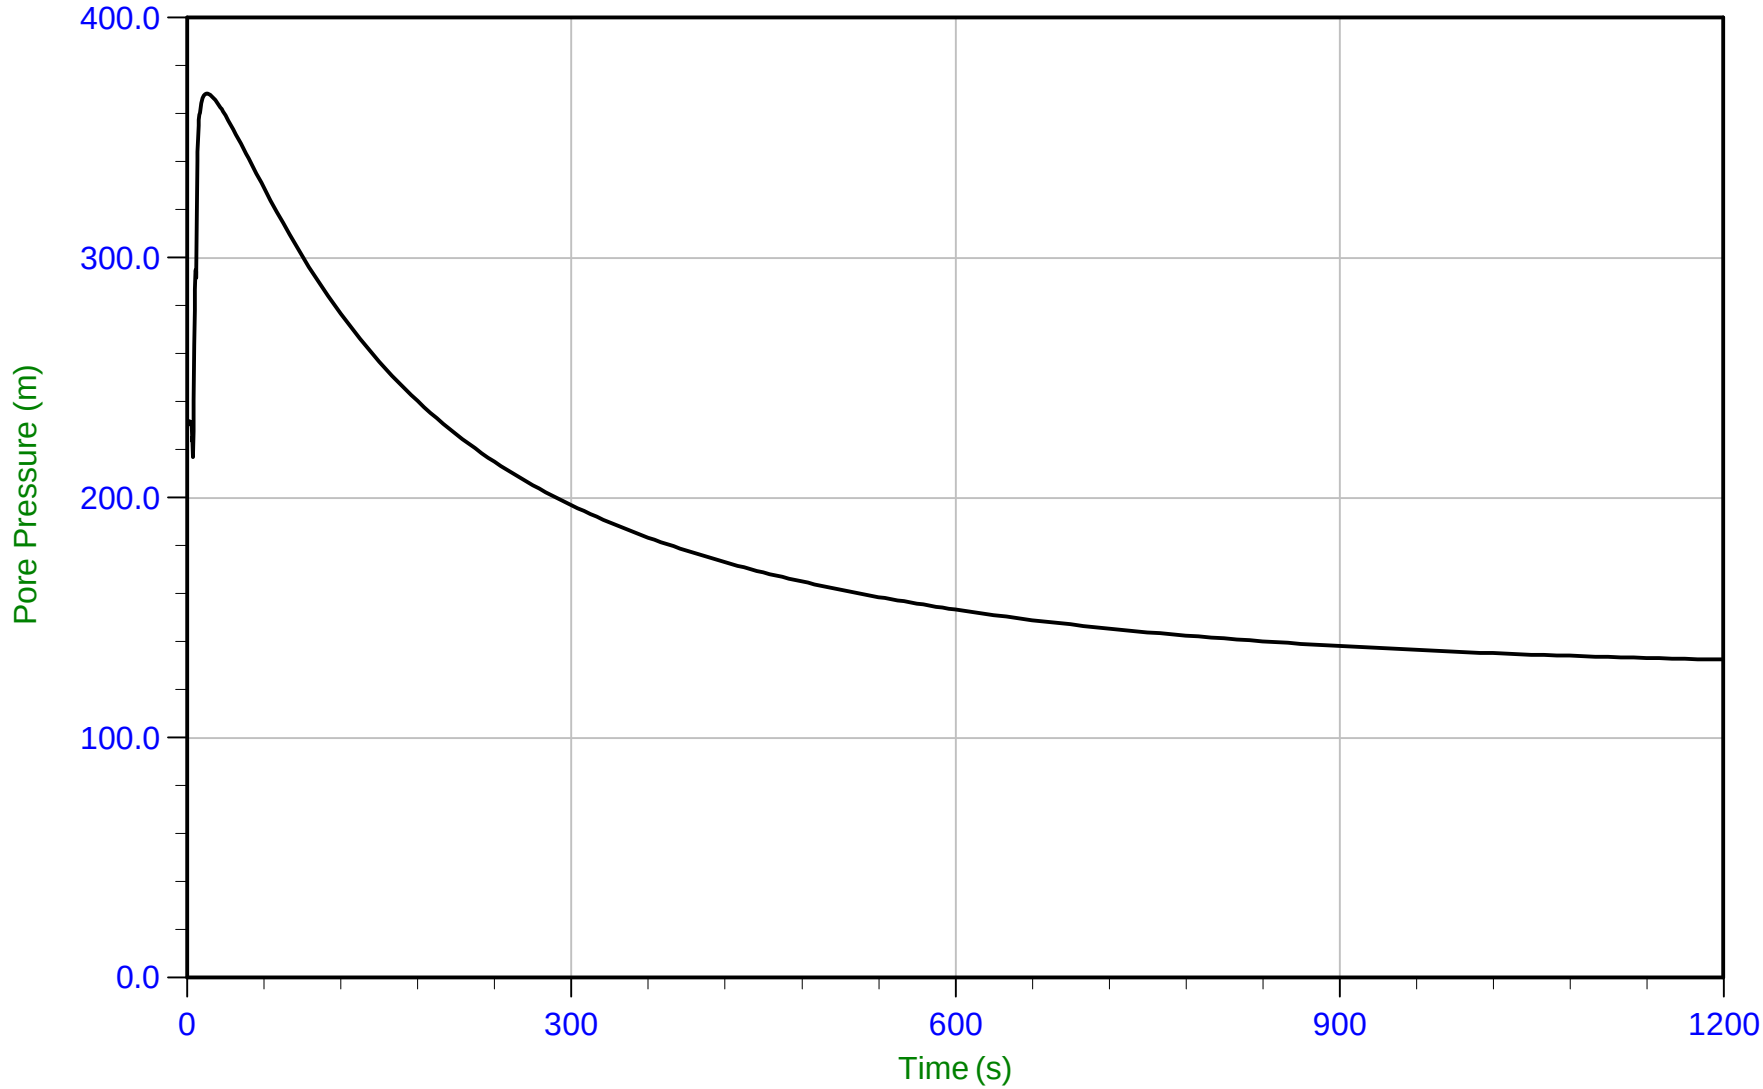

Trace Summary:

Filename: 22-02-23796_RP22-22CPT261.PPF
Depth: 12.025 m / 39.452 ft
Duration: 1200.0 s


u Min: 132.6 m
u Max: 368.4 m
u Final: 132.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 12:35
Site: Brooks, Alberta

Sounding: RCPT22-22CPT262
Cone: 821:T1000F10U35 Area=15 cm²

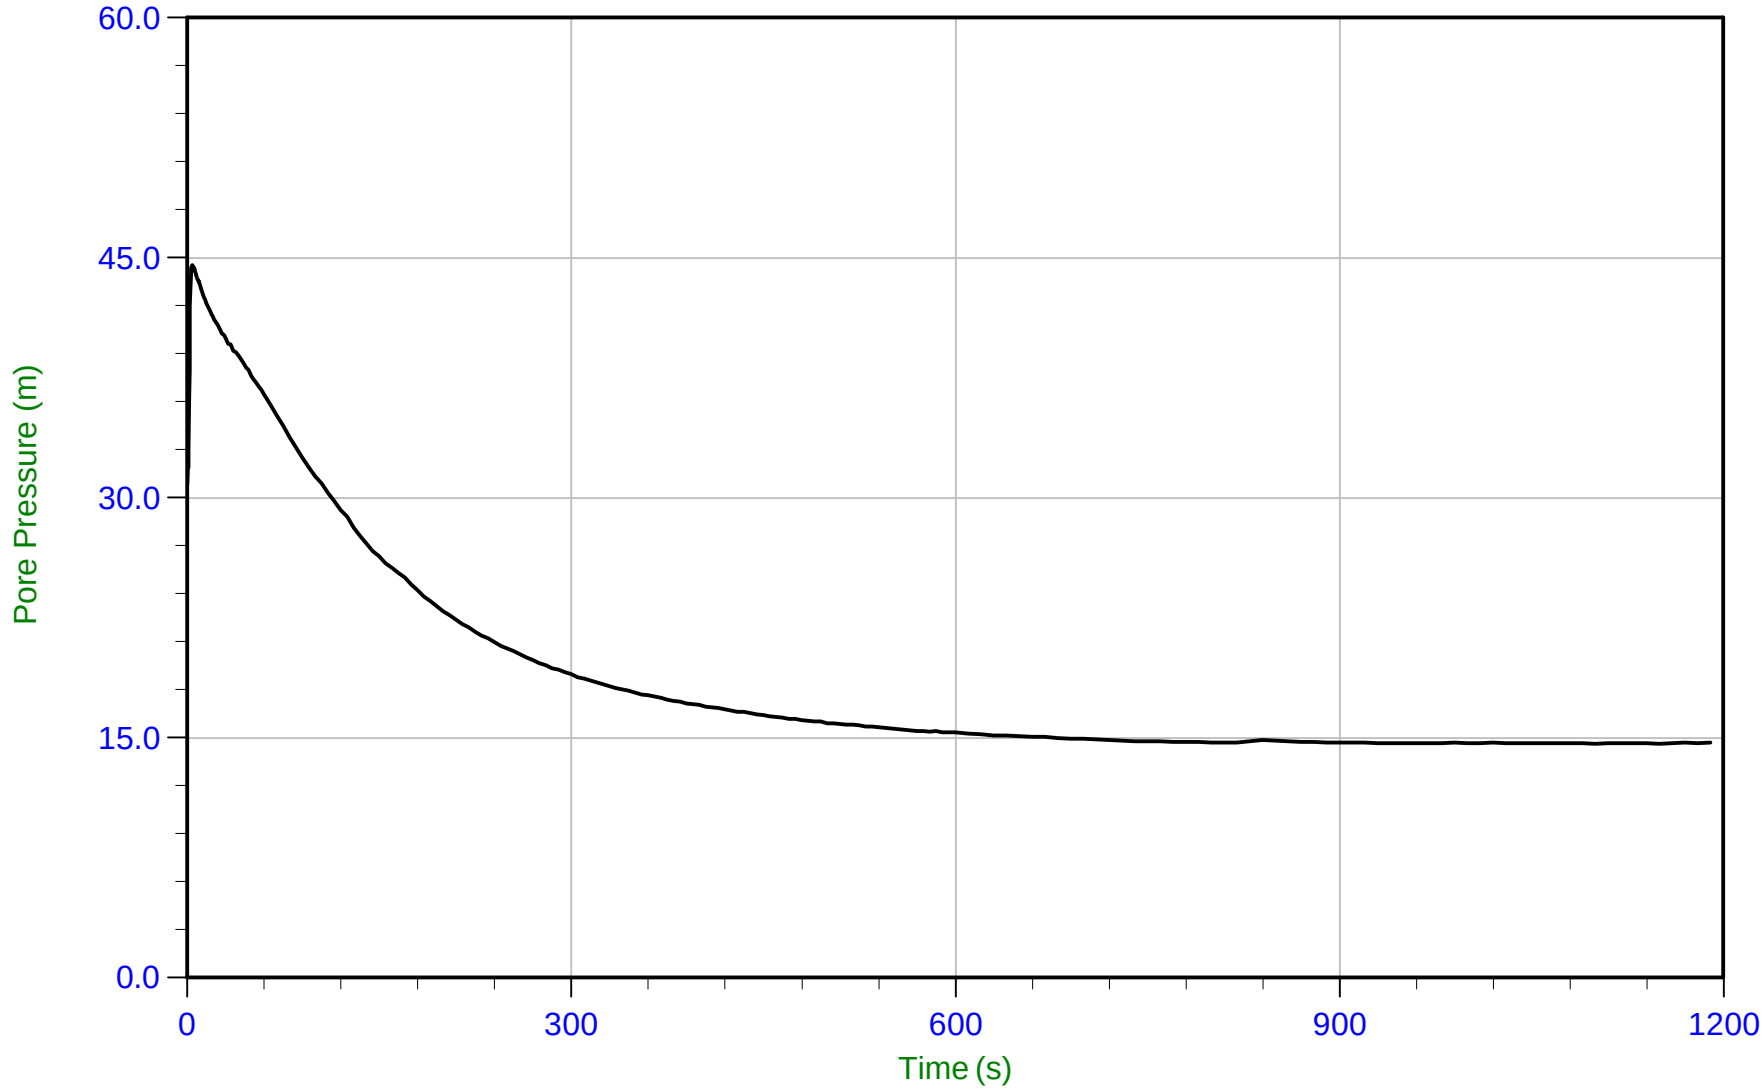

Trace Summary:

Filename: 22-02-23796_RP22-22CPT262.PPF
Depth: 4.900 m / 16.076 ft
Duration: 1190.0 s


u Min: 14.6 m
u Max: 44.5 m
u Final: 14.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 11:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT263
Cone: 821:T1000F10U35 Area=15 cm²

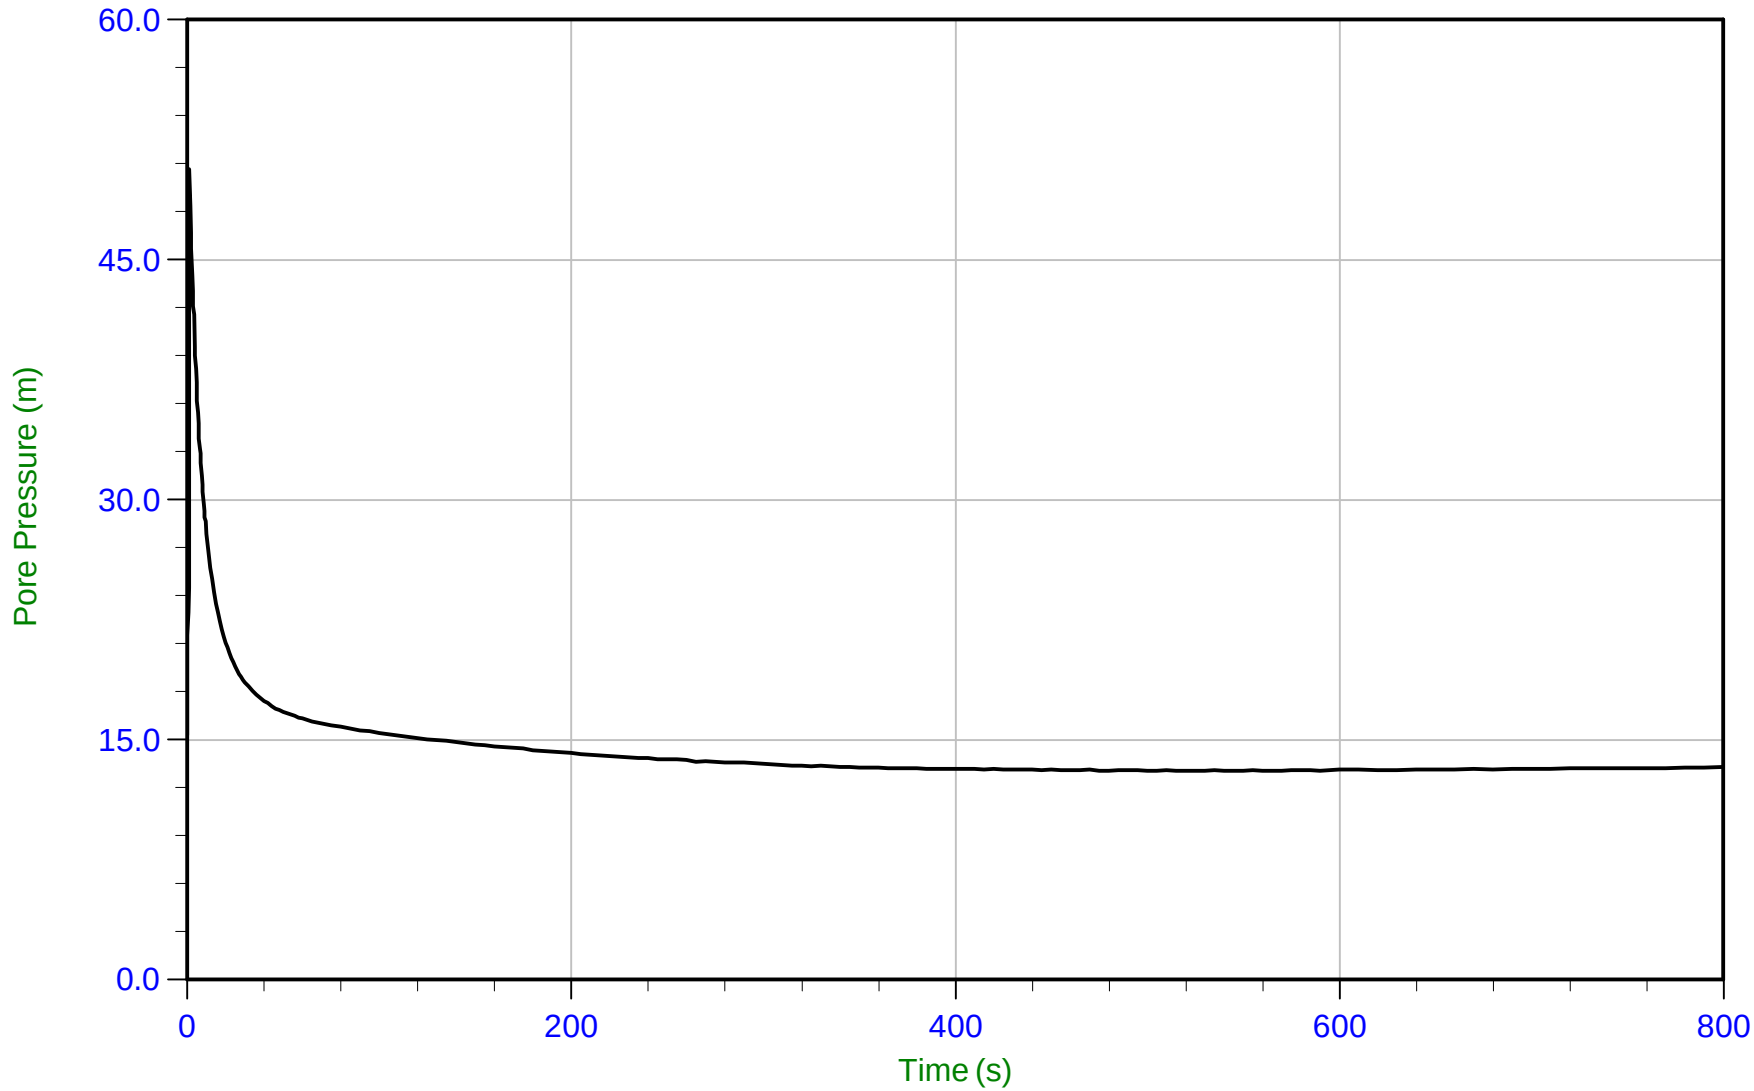

Trace Summary:

Filename: 22-02-23796_RP22-22CPT263.PPF
Depth: 3.750 m / 12.303 ft
Duration: 800.0 s


u Min: 13.0 m
u Max: 50.6 m
u Final: 13.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 10:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT264
Cone: 821:T1000F10U35 Area=15 cm²

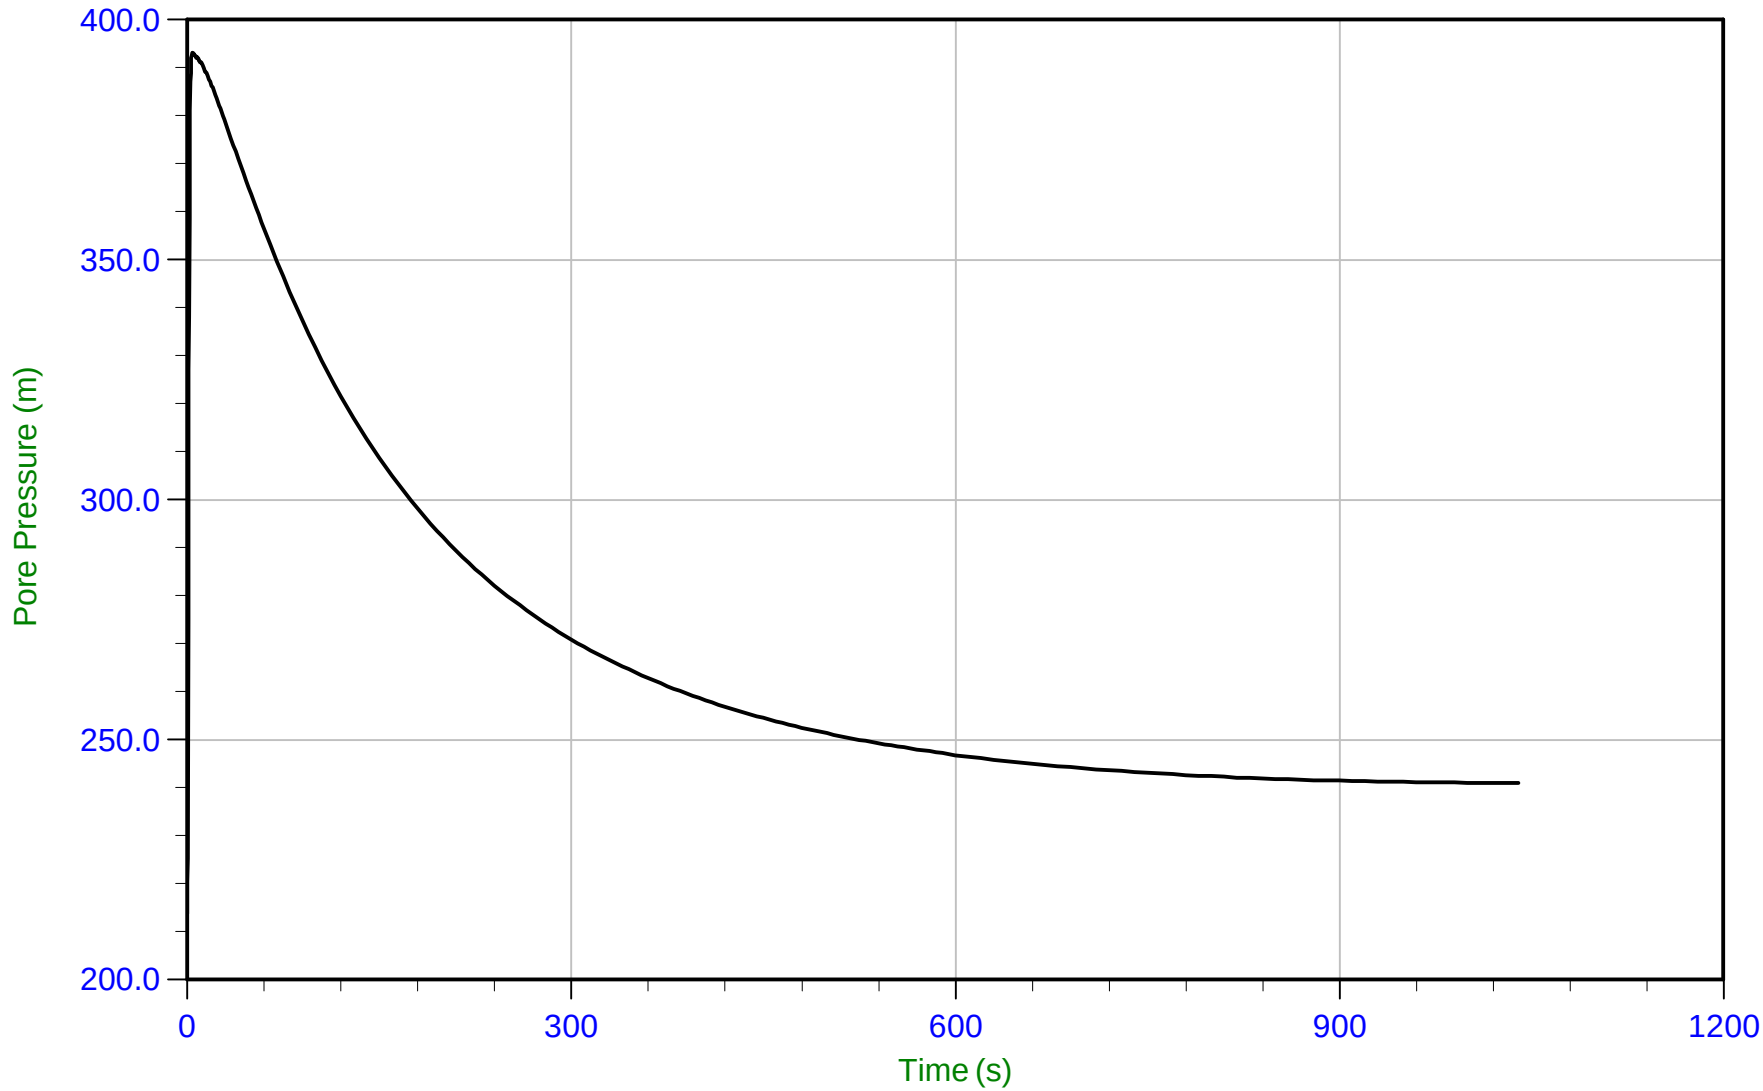

Trace Summary:

Filename: 22-02-23796_RP22-22CPT264.PPF
Depth: 6.200 m / 20.341 ft
Duration: 1040.0 s


u Min: 213.9 m
u Max: 393.1 m
u Final: 241.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/12/2022 10:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT265
Cone: 821:T1000F10U35 Area=15 cm²

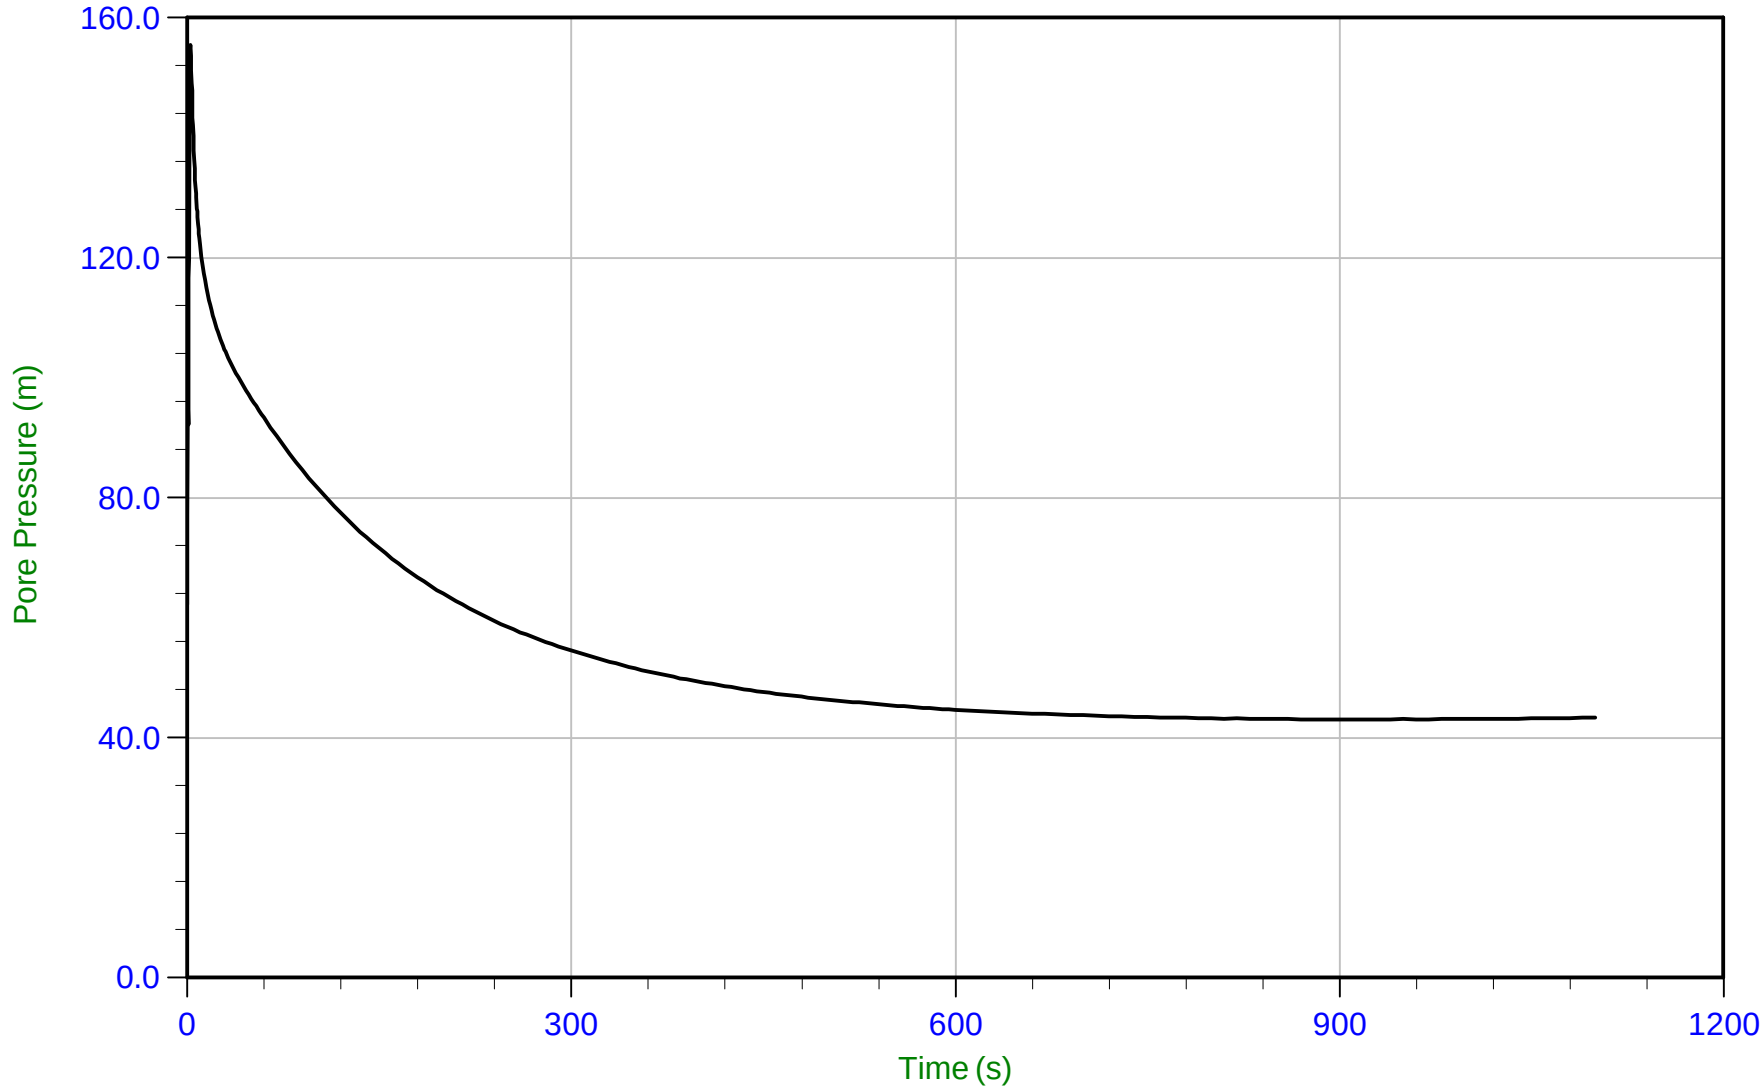

Trace Summary:

Filename: 22-02-23796_RP22-22CPT265.PPF
Depth: 5.475 m / 17.962 ft
Duration: 1100.0 s


u Min: 43.0 m
u Max: 155.4 m
u Final: 43.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/12/2022 11:24
Site: Brooks, Alberta

Sounding: RCPT22-22CPT266
Cone: 821:T1000F10U35 Area=15 cm²

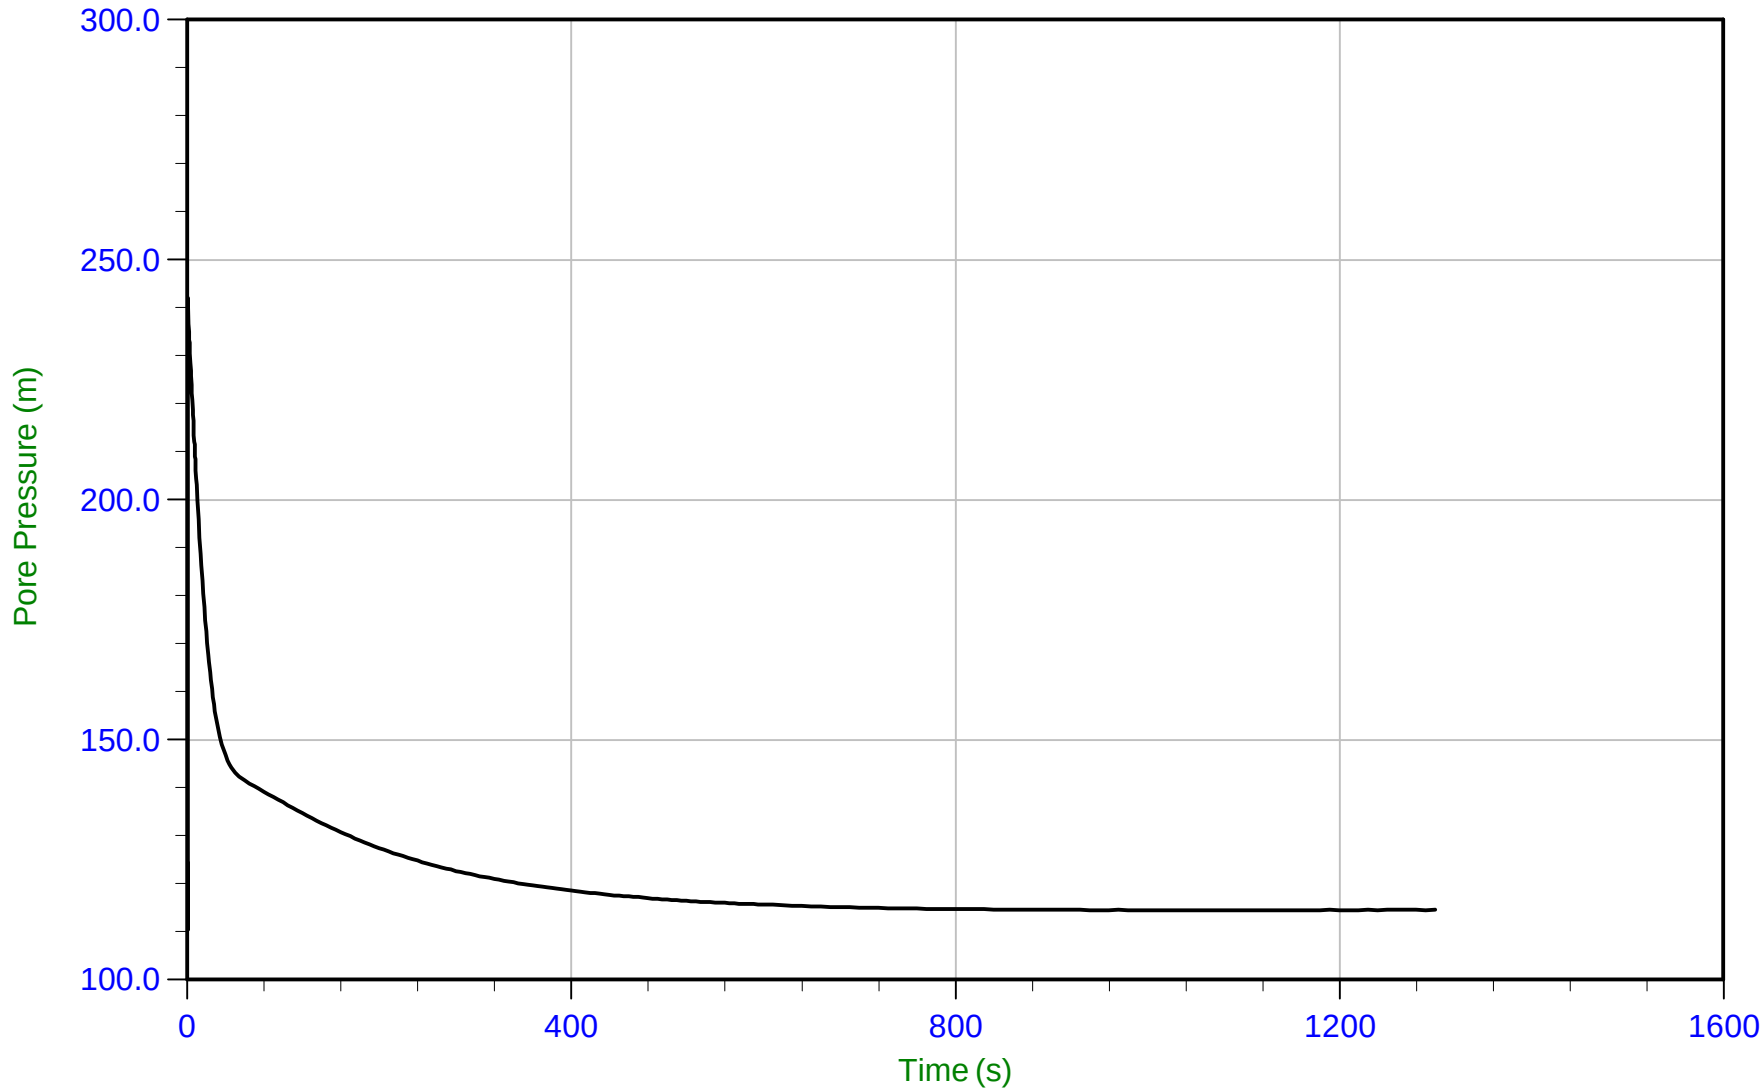

Trace Summary:

Filename: 22-02-23796_RP22-22CPT266.PPF
Depth: 3.850 m / 12.631 ft
Duration: 1300.0 s


u Min: 110.5 m
u Max: 242.0 m
u Final: 114.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/12/2022 12:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT267
Cone: 821:T1000F10U35 Area=15 cm²

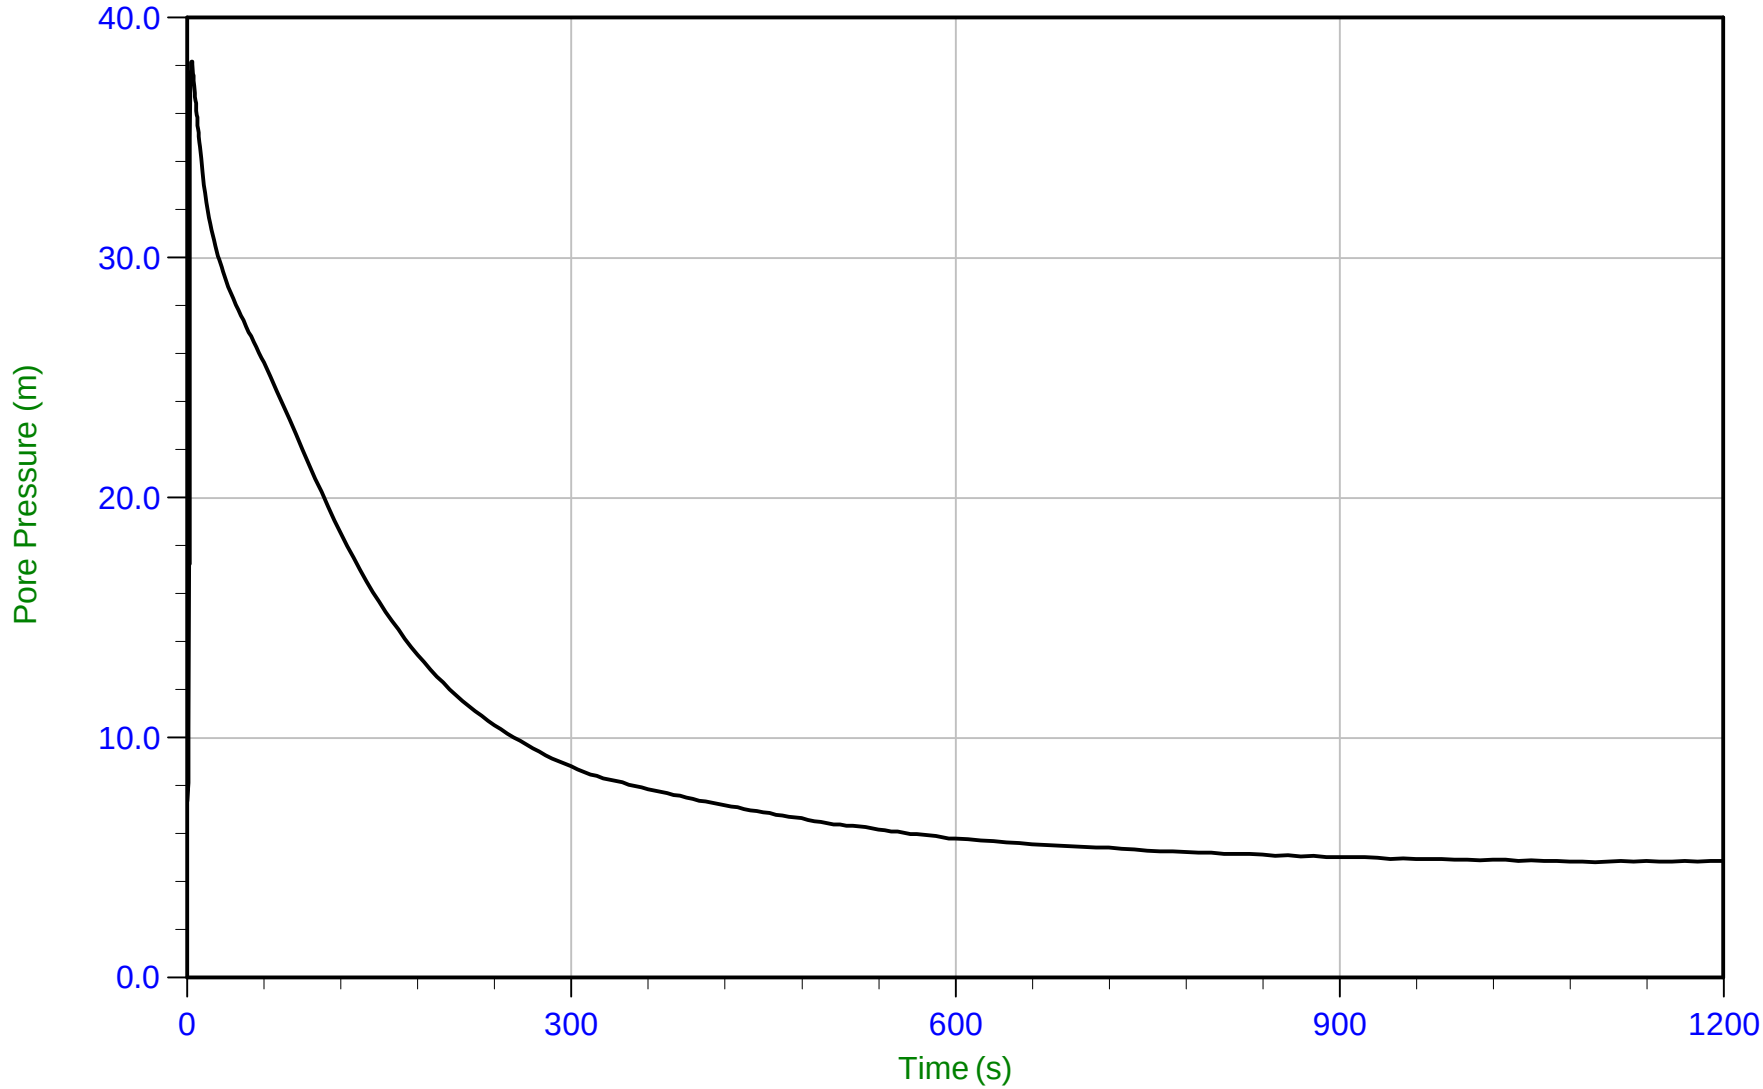

Trace Summary:

Filename: 22-02-23796_RP22-22CPT267.PPF
Depth: 5.825 m / 19.111 ft
Duration: 1200.0 s


u Min: 4.8 m
u Max: 38.2 m
u Final: 4.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/12/2022 12:14
Site: Brooks, Alberta

Sounding: RCPT22-22CPT267
Cone: 821:T1000F10U35 Area=15 cm²

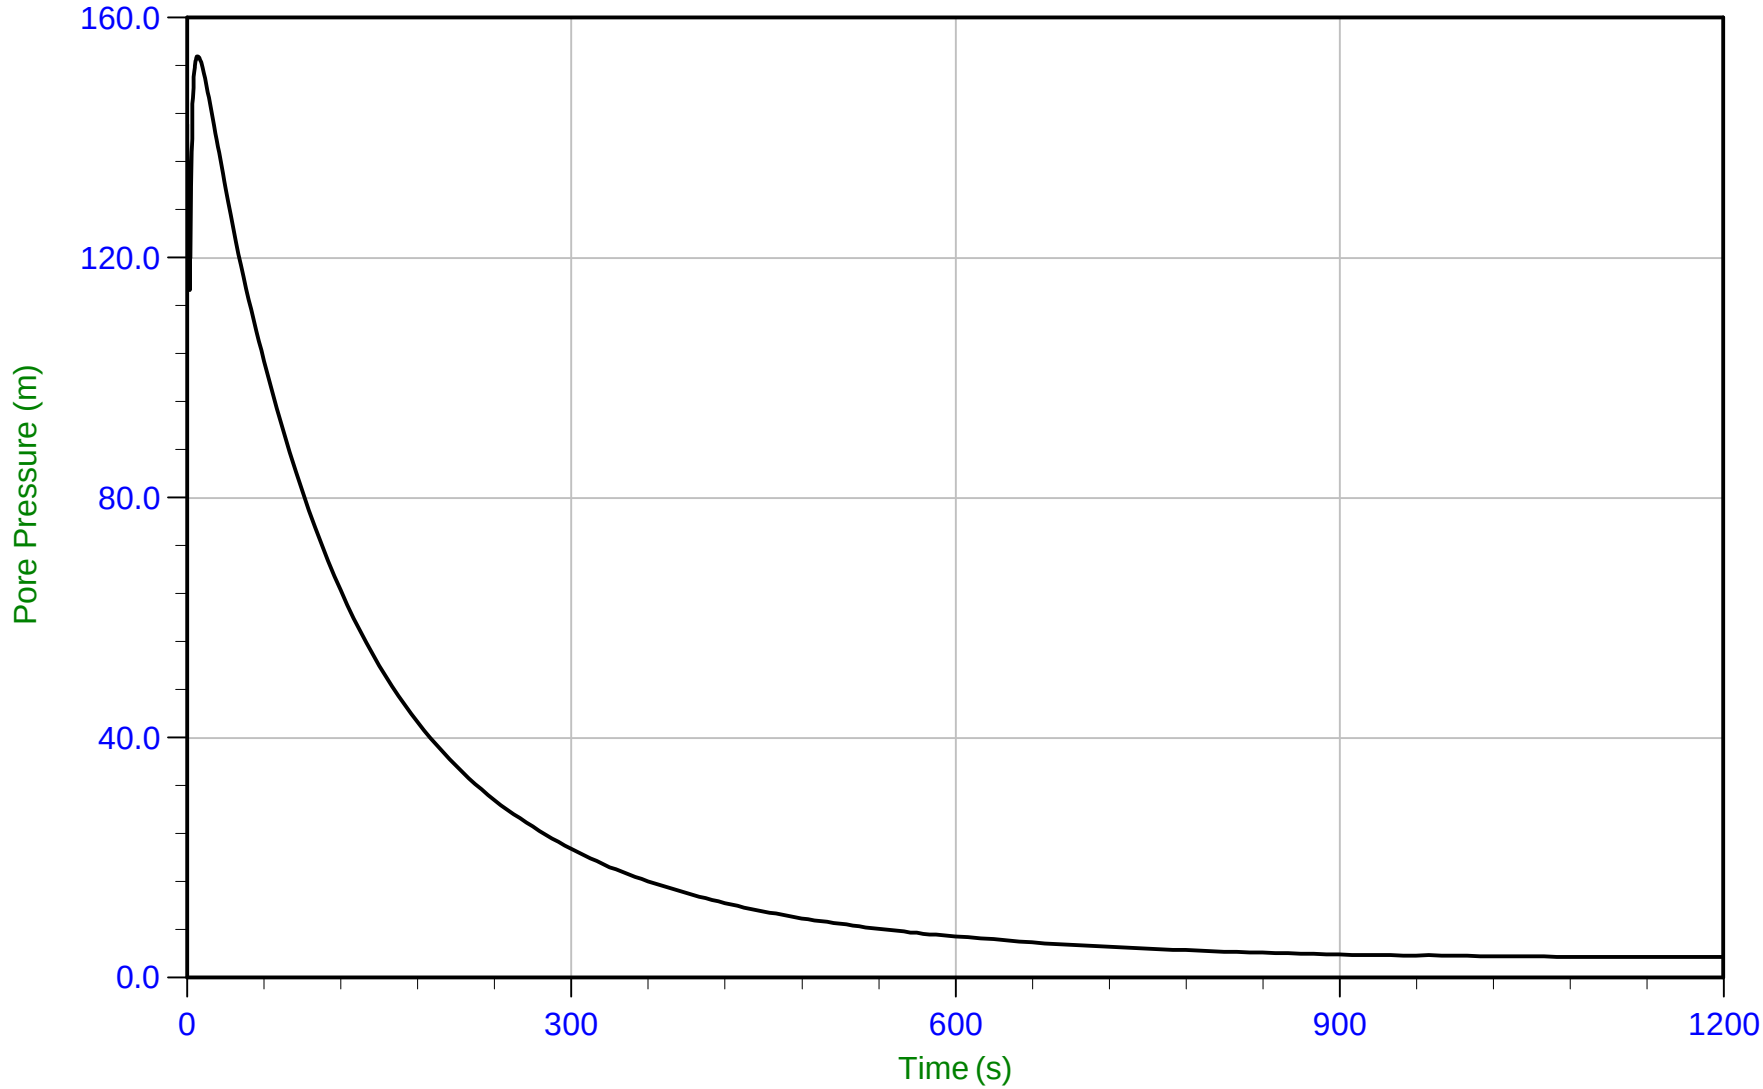

Trace Summary:

Filename: 22-02-23796_RP22-22CPT267.PPF
Depth: 12.025 m / 39.452 ft
Duration: 1200.0 s


u Min: 3.5 m
u Max: 153.6 m
u Final: 3.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/12/2022 14:40
Site: Brooks, Alberta

Sounding: RCPT22-22CPT270
Cone: 821:T1000F10U35 Area=15 cm²

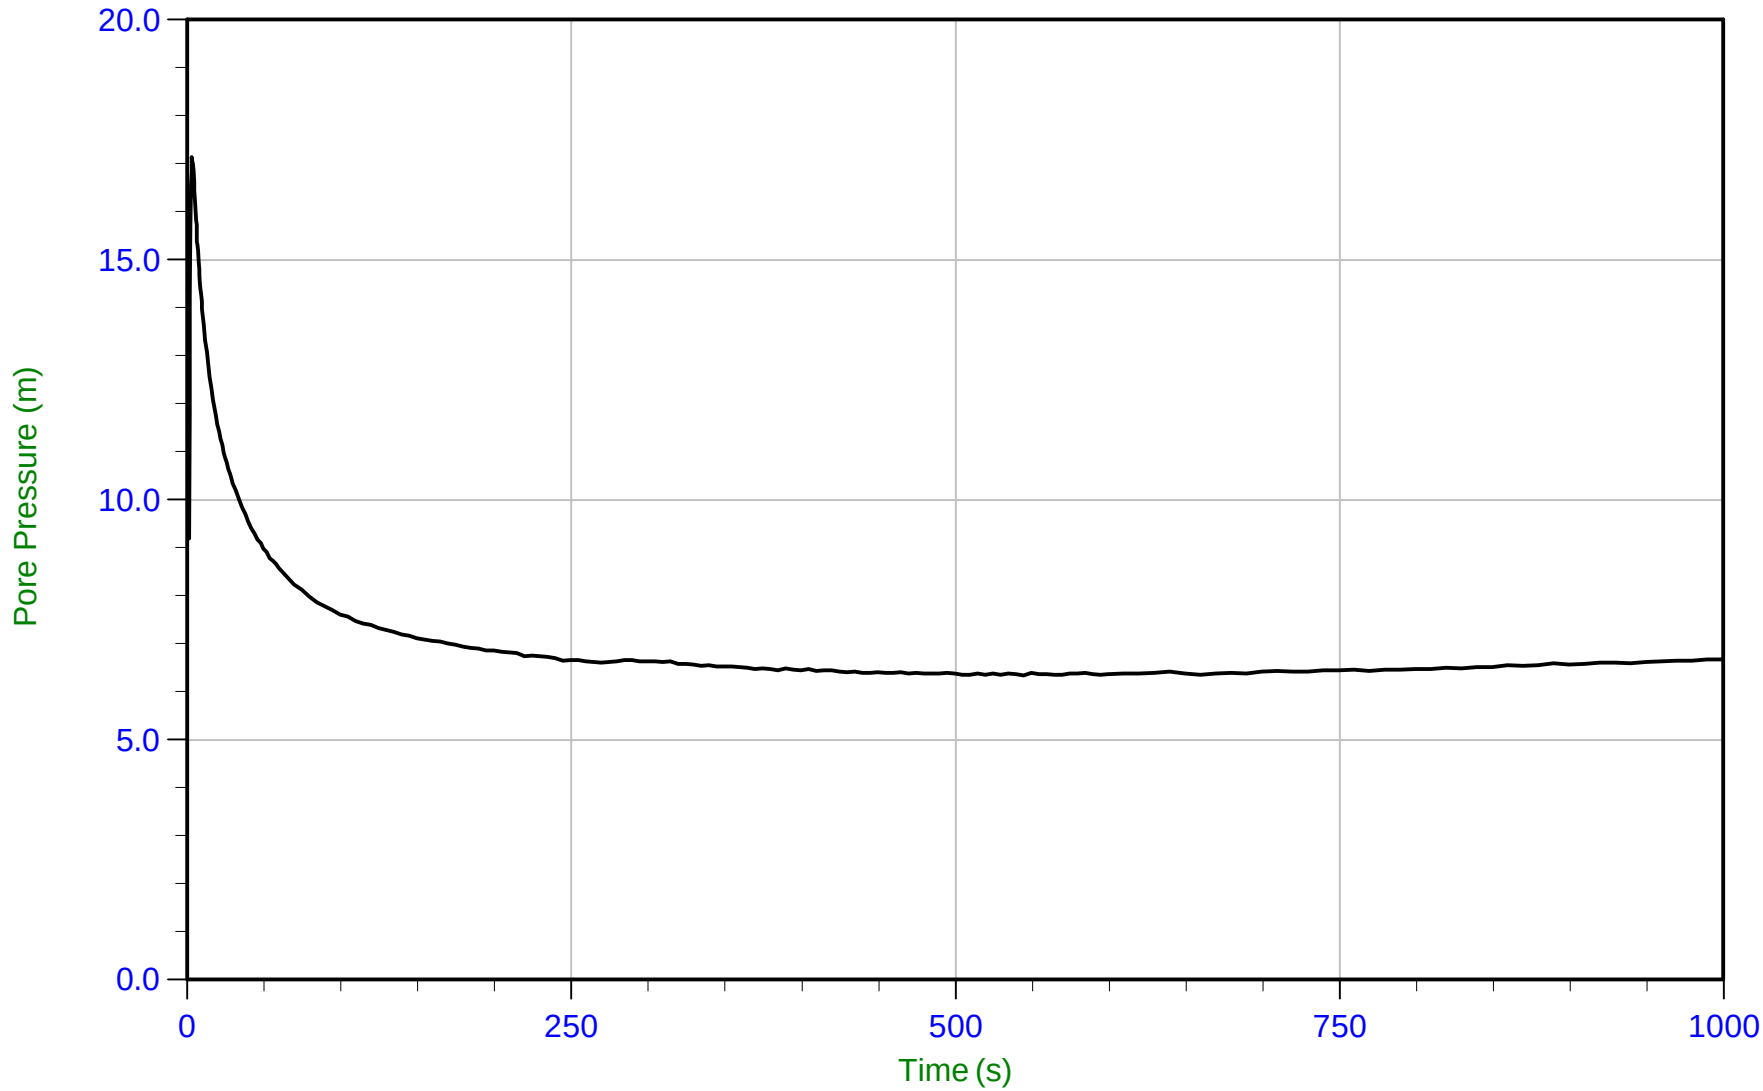

Trace Summary:

Filename: 22-02-23796_RP22-22CPT270.PPF
Depth: 4.825 m / 15.830 ft
Duration: 1000.0 s


u Min: 6.3 m
u Max: 17.1 m
u Final: 6.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/12/2022 15:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT271
Cone: 821:T1000F10U35 Area=15 cm²

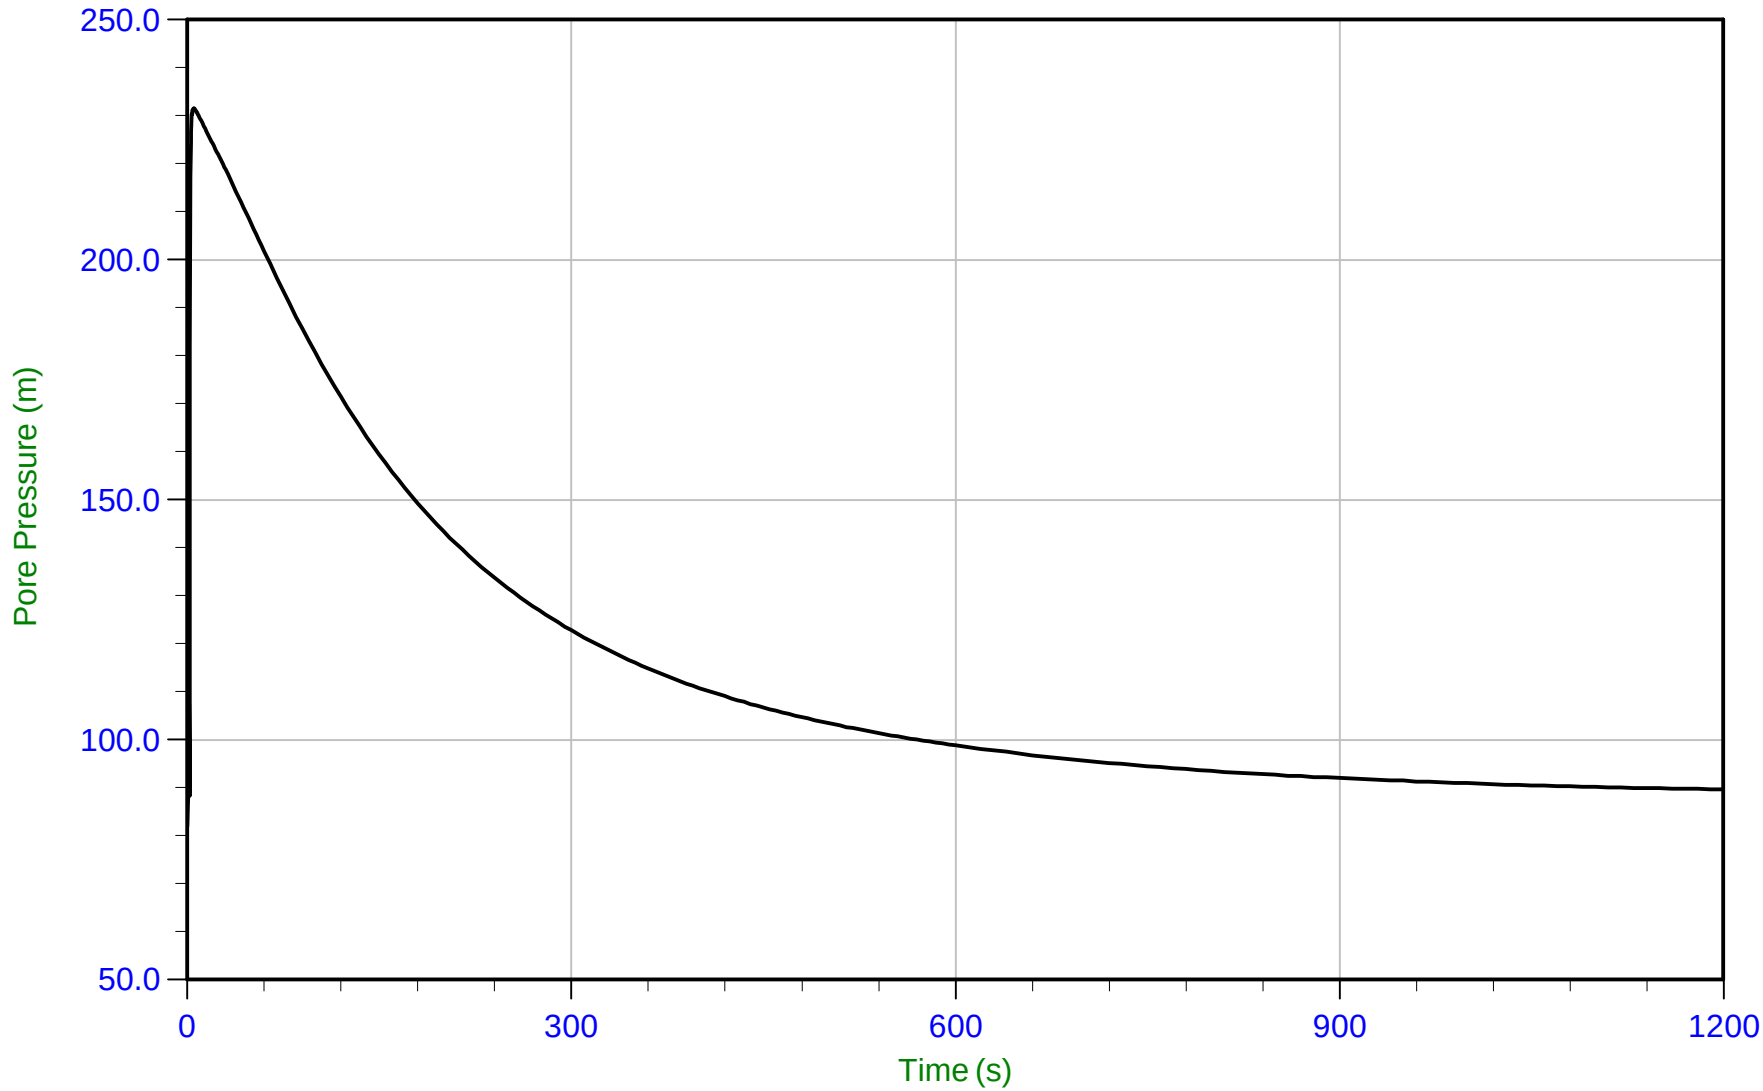

Trace Summary:

Filename: 22-02-23796_RP22-22CPT271.PPF
Depth: 5.800 m / 19.029 ft
Duration: 1200.0 s


u Min: 81.9 m
u Max: 231.5 m
u Final: 89.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/12/2022 15:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT271
Cone: 821:T1000F10U35 Area=15 cm²

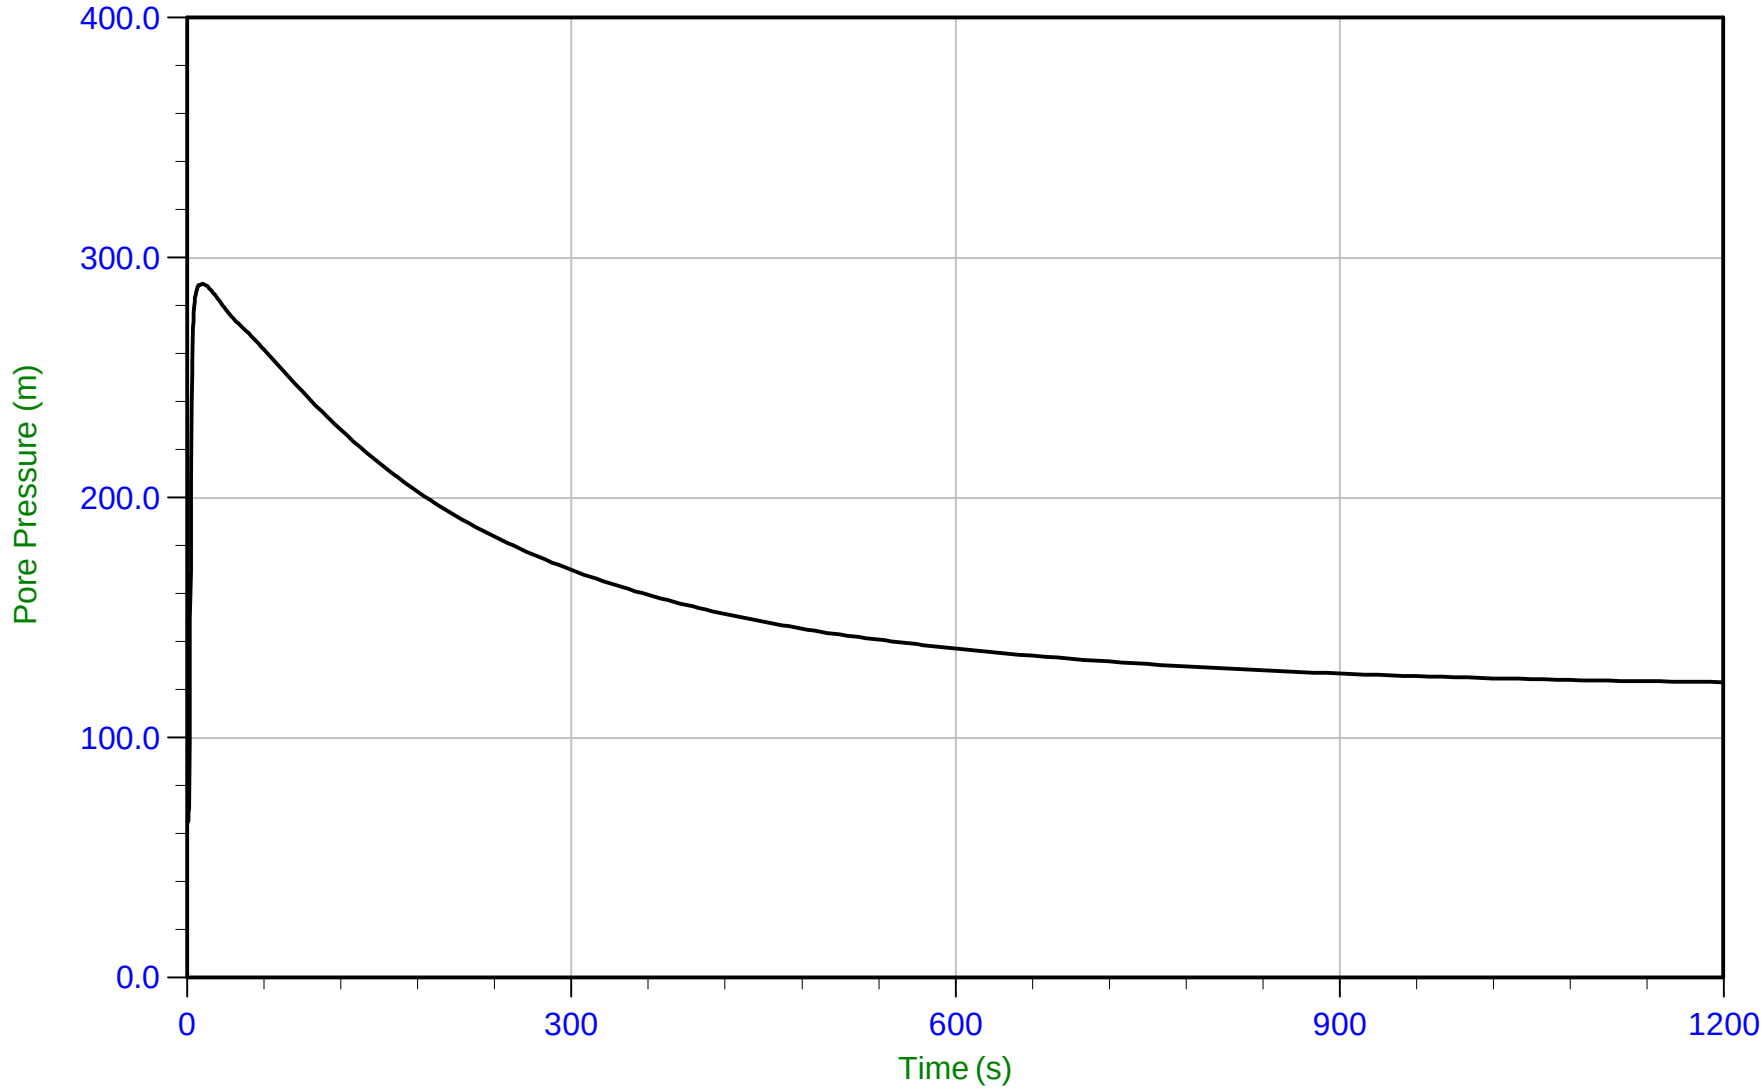

Trace Summary:

Filename: 22-02-23796_RP22-22CPT271.PPF
Depth: 8.550 m / 28.051 ft
Duration: 1200.0 s


u Min: 64.6 m
u Max: 289.1 m
u Final: 123.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 08:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT272
Cone: 821:T1000F10U35 Area=15 cm²

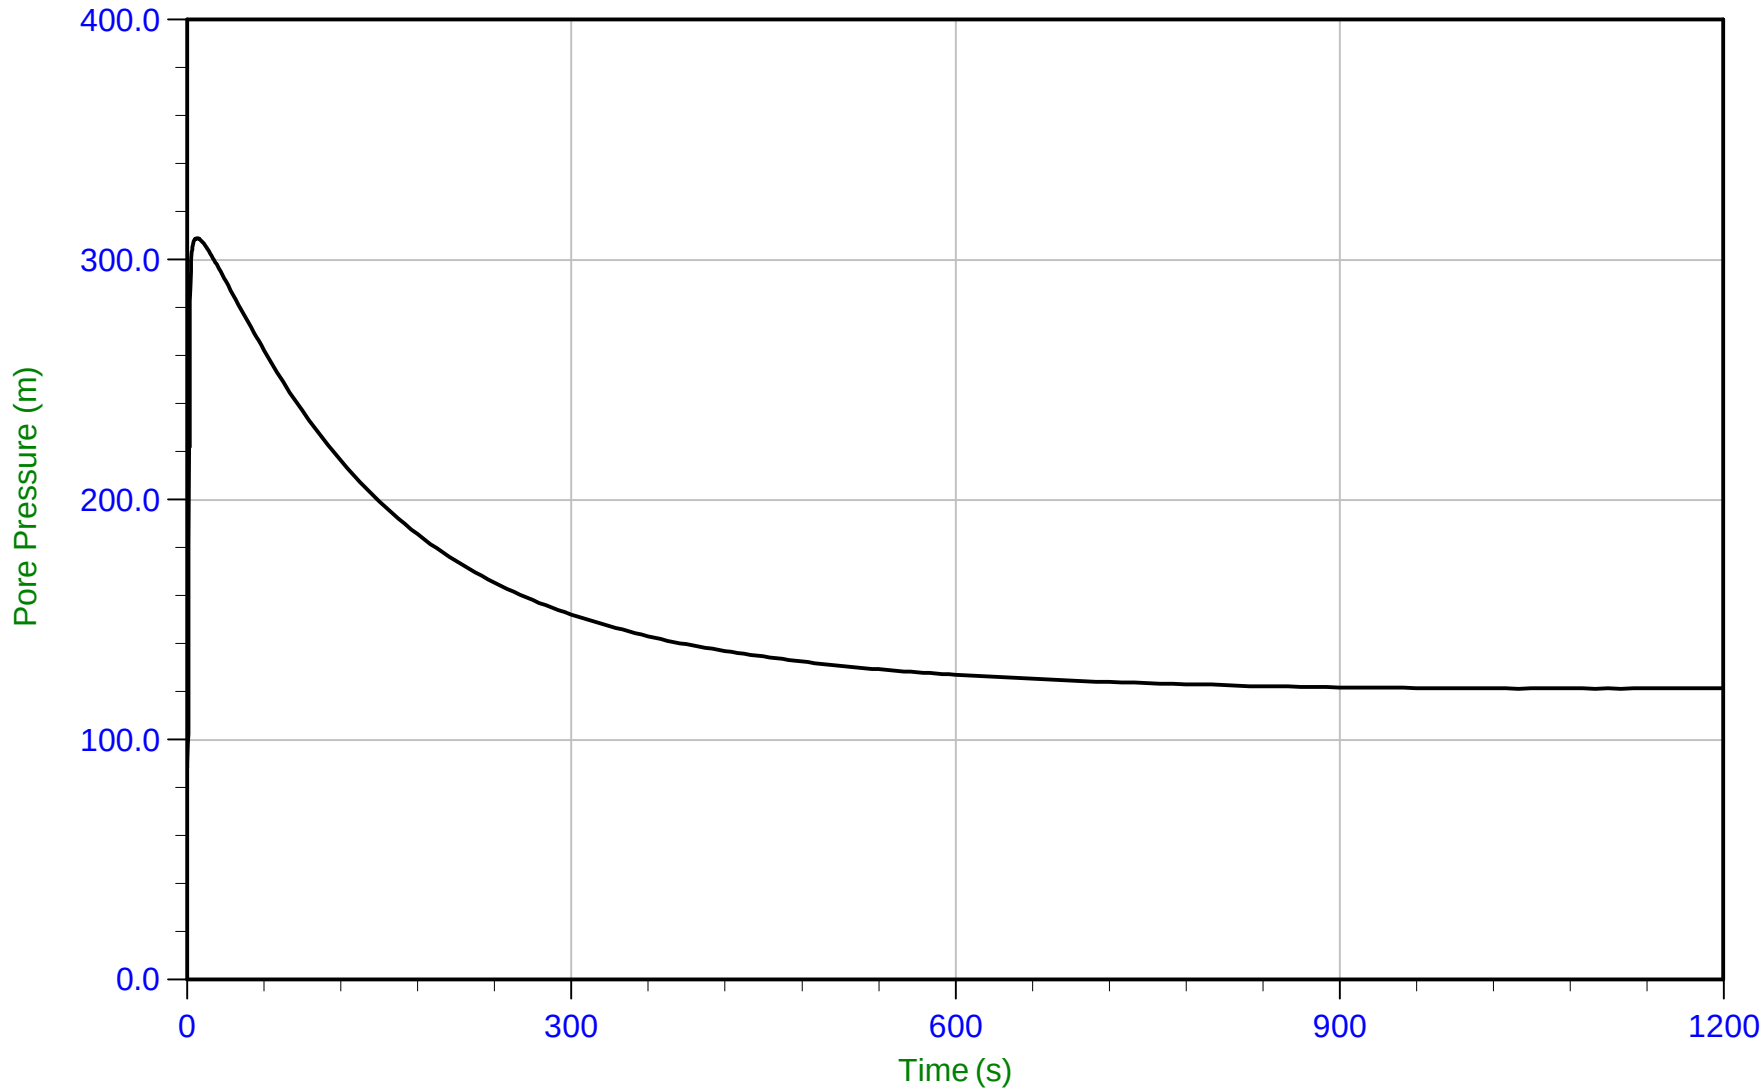

Trace Summary:

Filename: 22-02-23796_RP22-22CPT272.PPF
Depth: 6.100 m / 20.013 ft
Duration: 1200.0 s


u Min: 88.4 m
u Max: 309.1 m
u Final: 121.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 08:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT272
Cone: 821:T1000F10U35 Area=15 cm²

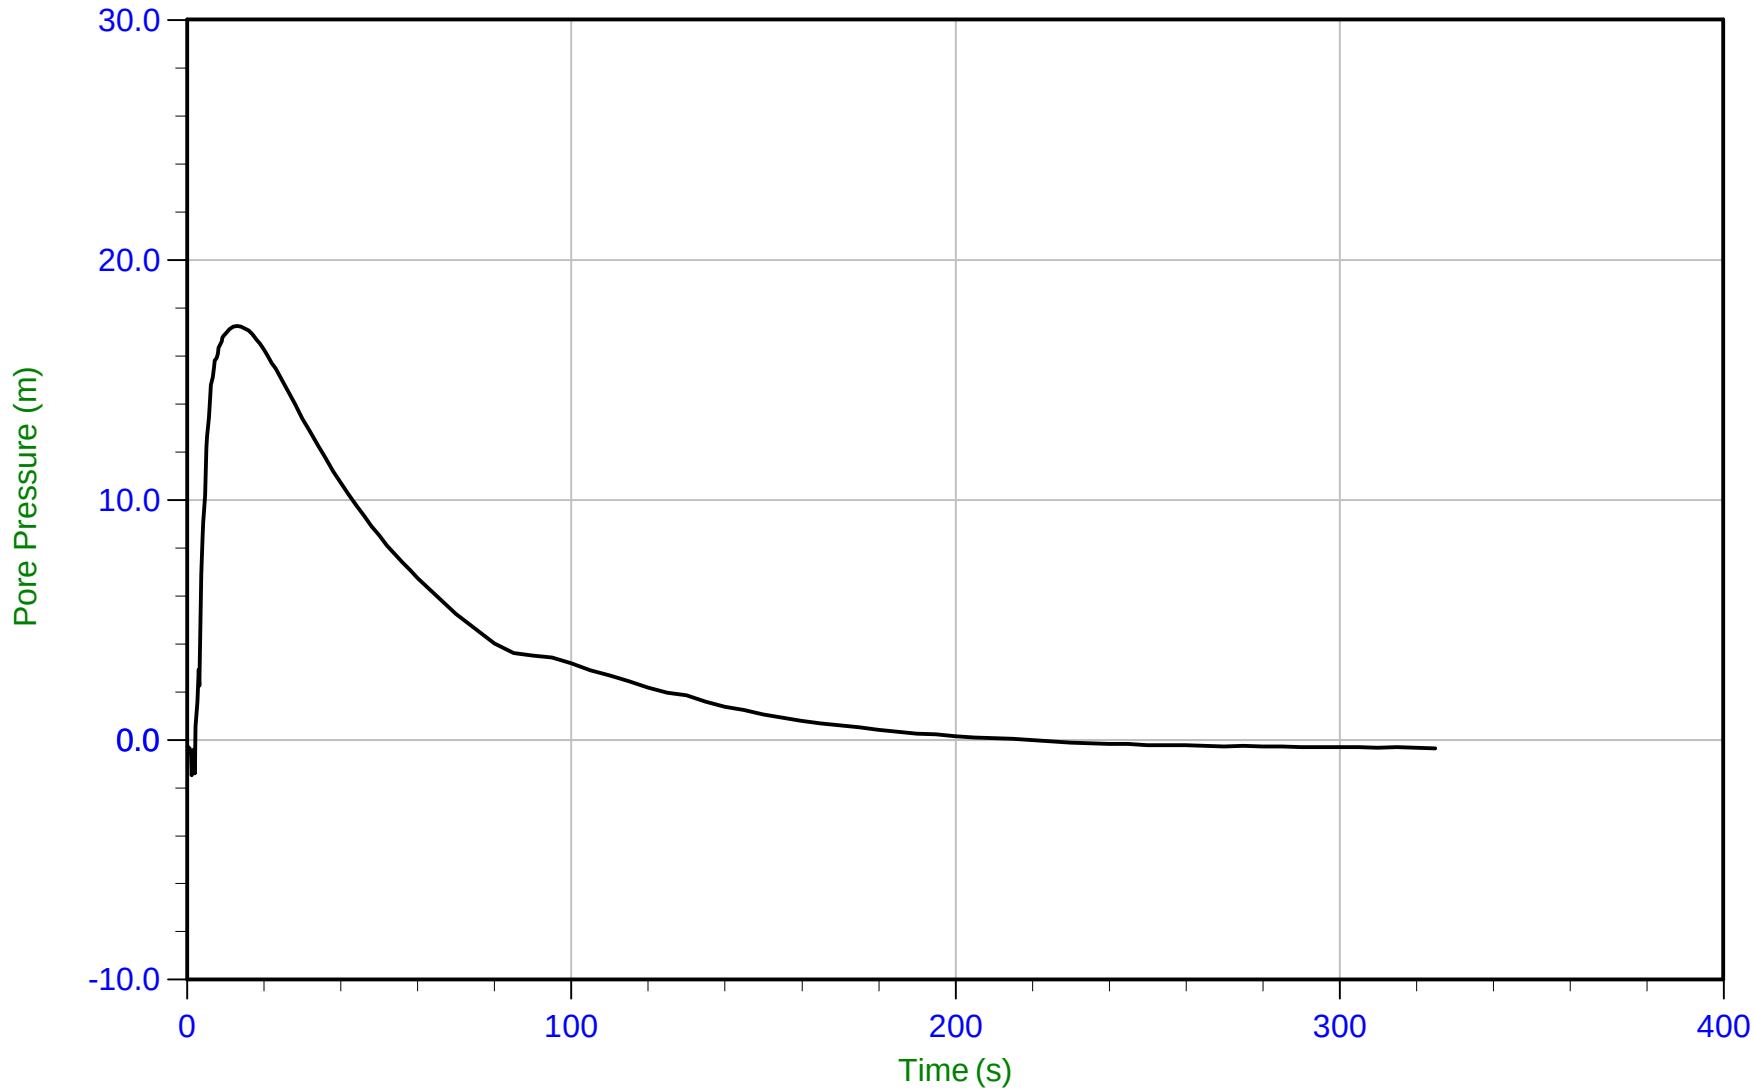

Trace Summary:

Filename: 22-02-23796_RP22-22CPT272.PPF
Depth: 9.250 m / 30.347 ft
Duration: 325.0 s


u Min: -1.5 m
u Max: 17.2 m
u Final: -0.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/13/2022 09:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT273
Cone: 821:T1000F10U35 Area=15 cm²

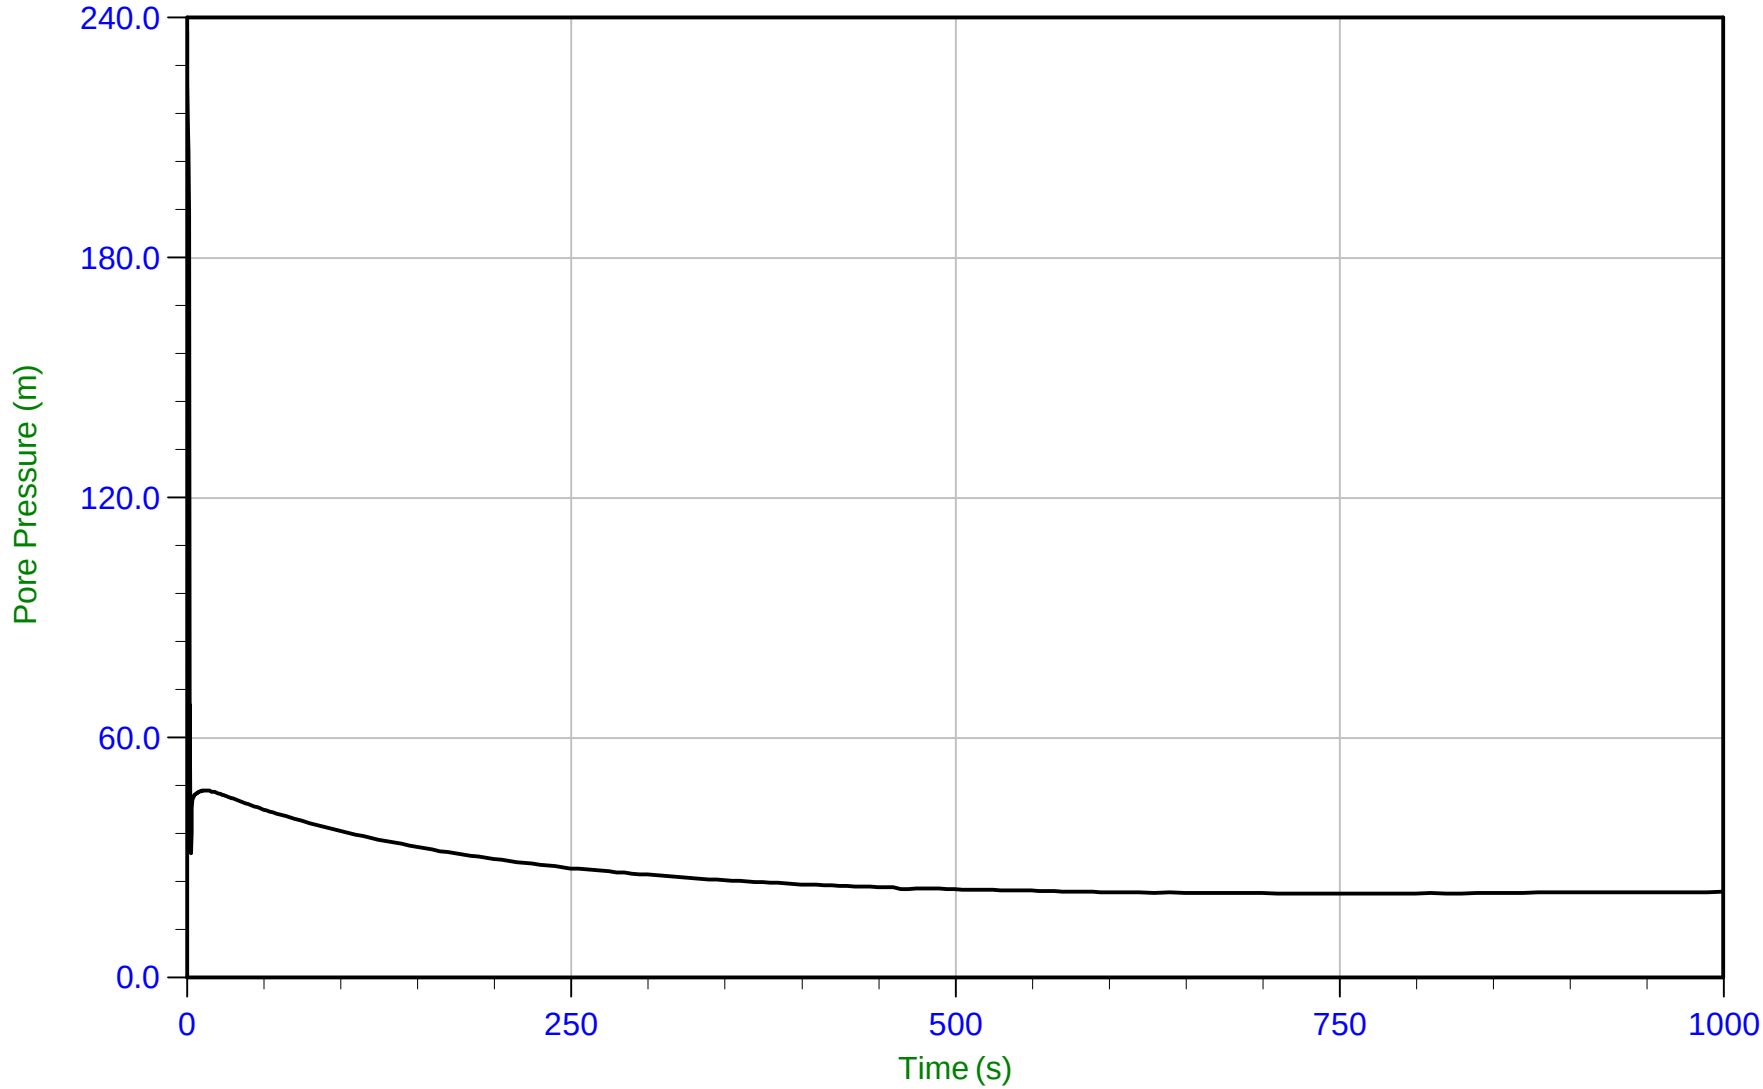

Trace Summary:

Filename: 22-02-23796_RP22-22CPT273.PPF
Depth: 5.475 m / 17.962 ft
Duration: 1000.0 s


u Min: 21.0 m
u Max: 236.8 m
u Final: 21.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/31/2022 17:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT274
Cone: 854:T1500F15U35 Area=15 cm²

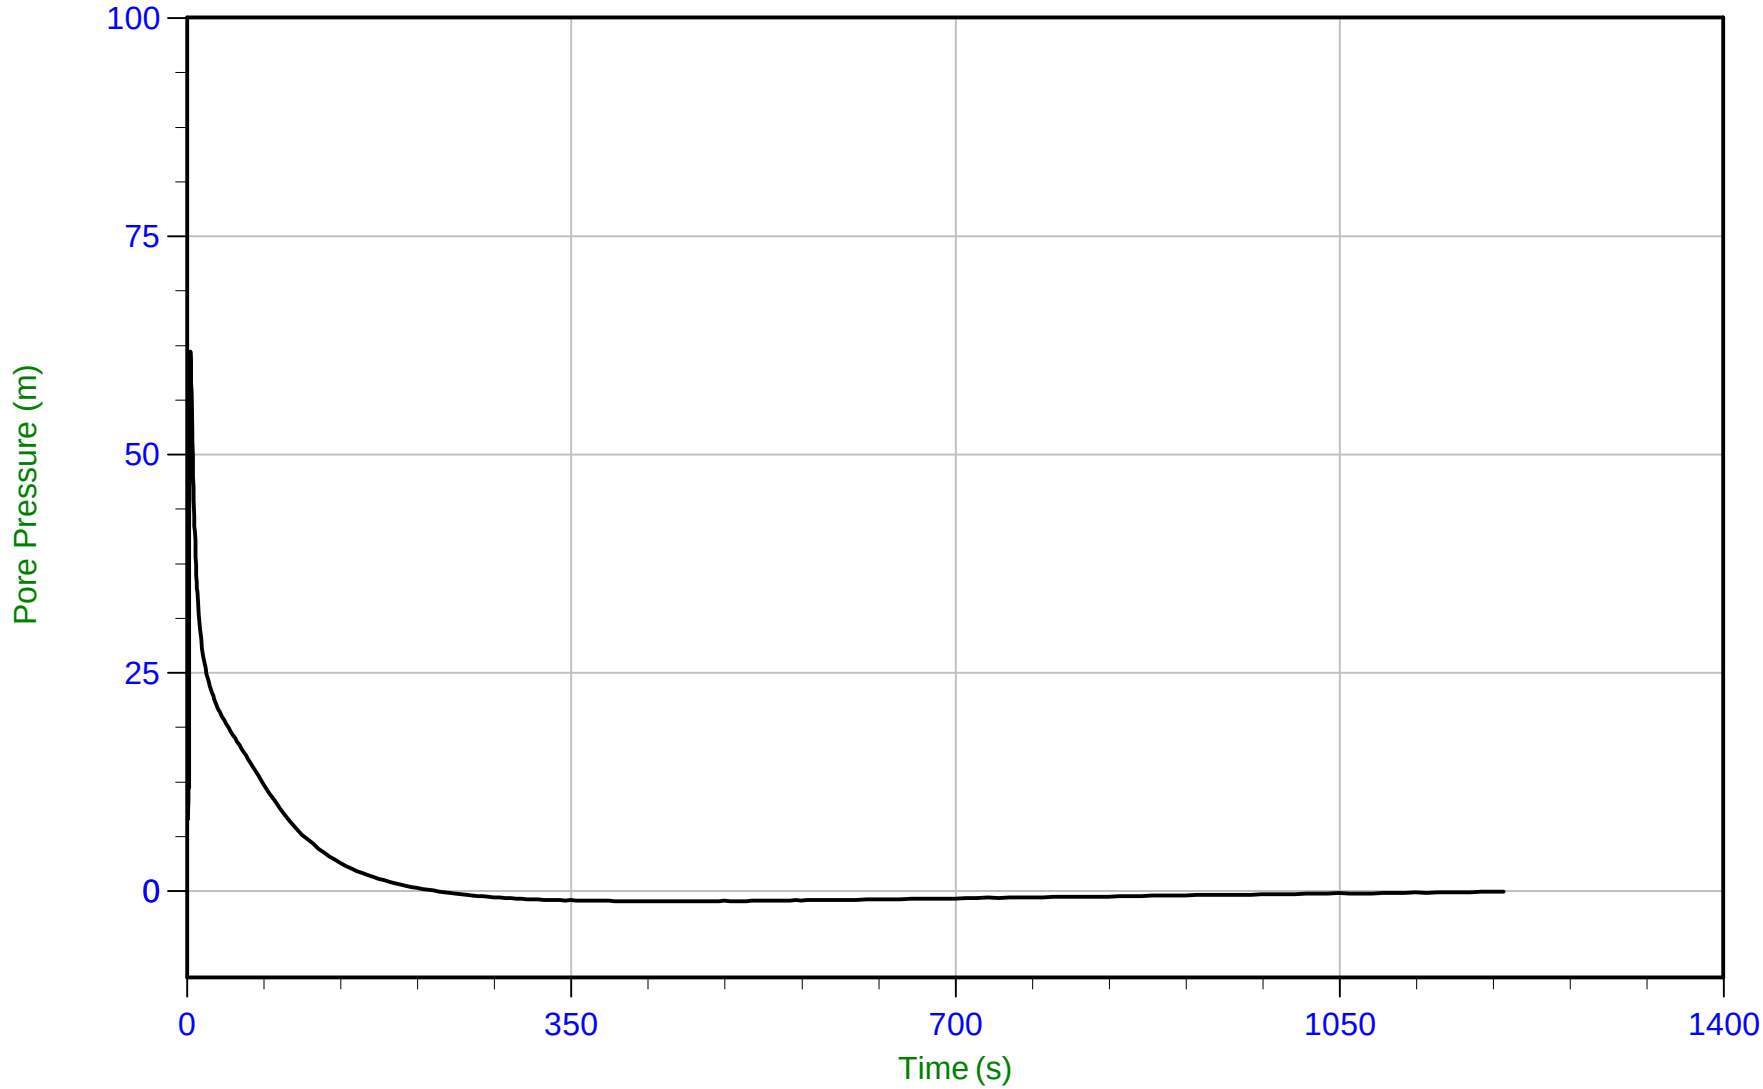

Trace Summary:

Filename: 22-02-23796_RP22-22CPT274.PPF
Depth: 4.850 m / 15.912 ft
Duration: 1200.0 s


u Min: -1.3 m
u Max: 61.7 m
u Final: -0.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/01/2022 06:21
Site: Brooks, Alberta

Sounding: RCPT22-22CPT275
Cone: 854:T1500F15U35 Area=15 cm²

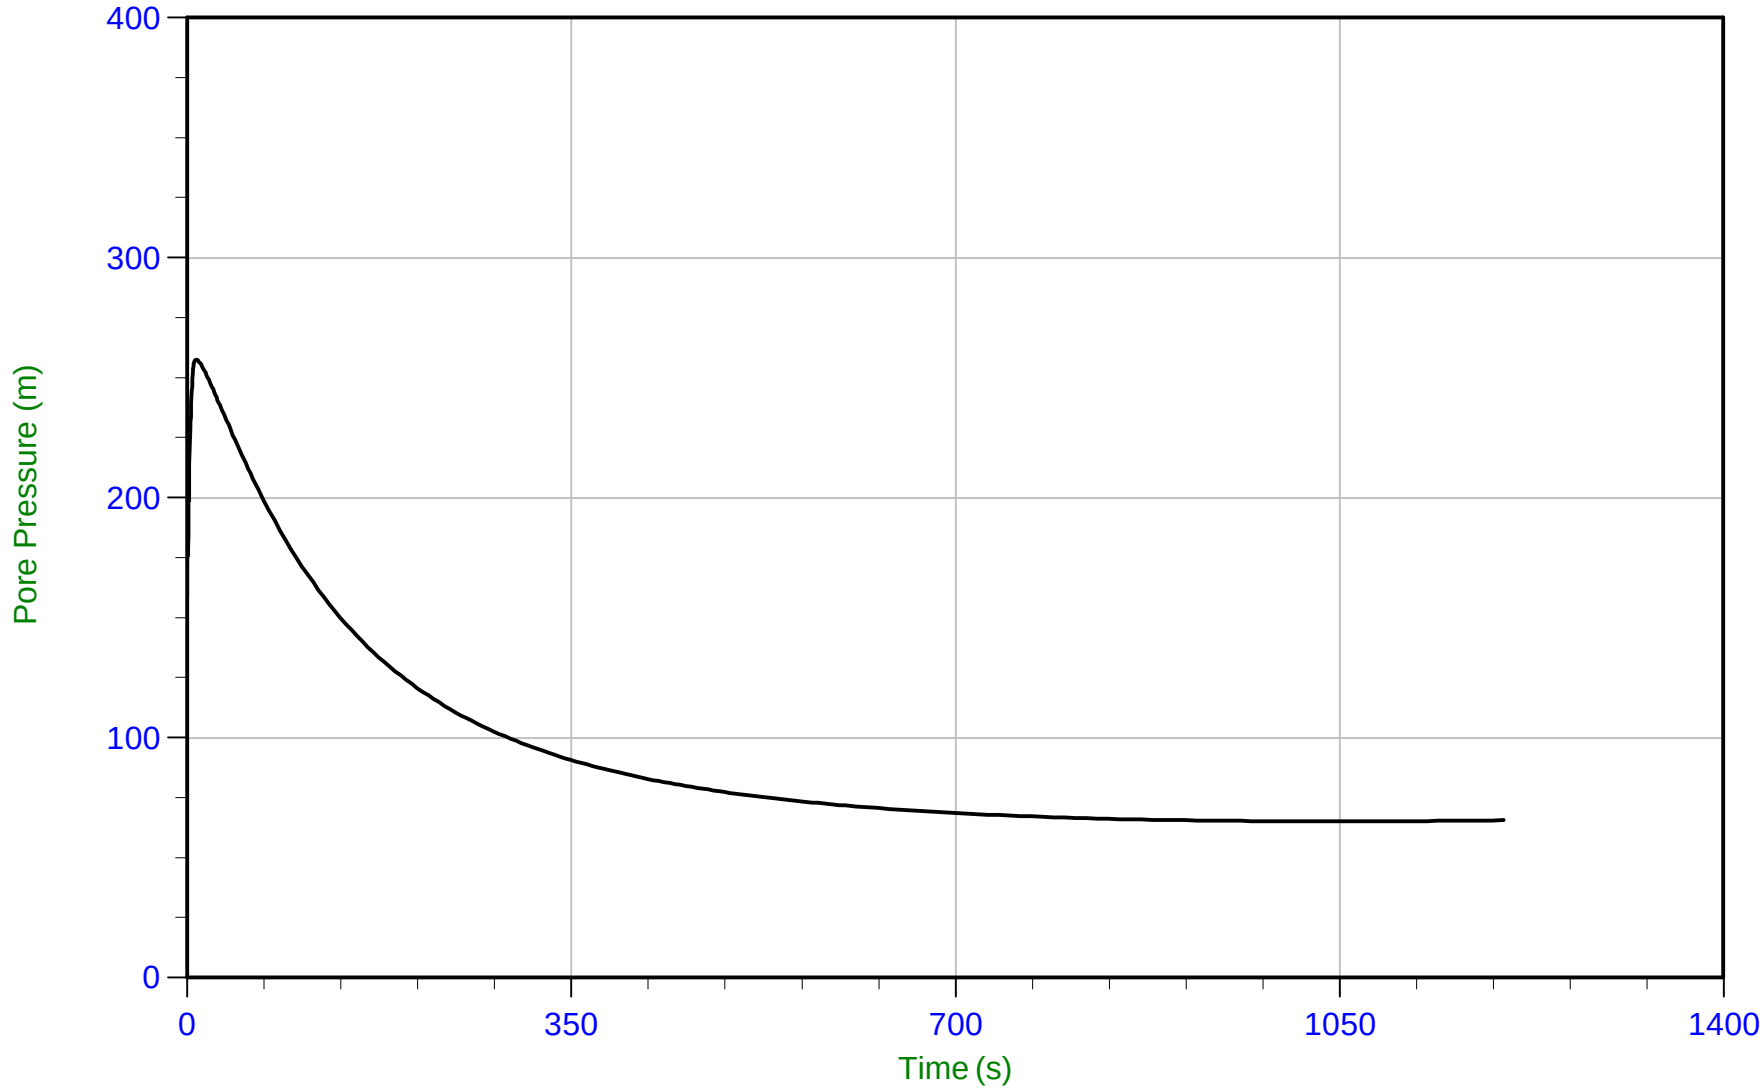

Trace Summary:

Filename: 22-02-23796_RP22-22CPT275.PPF
Depth: 8.000 m / 26.246 ft
Duration: 1200.0 s


u Min: 65.2 m
u Max: 257.5 m
u Final: 65.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/01/2022 07:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT276B
Cone: 854:T1500F15U35 Area=15 cm²

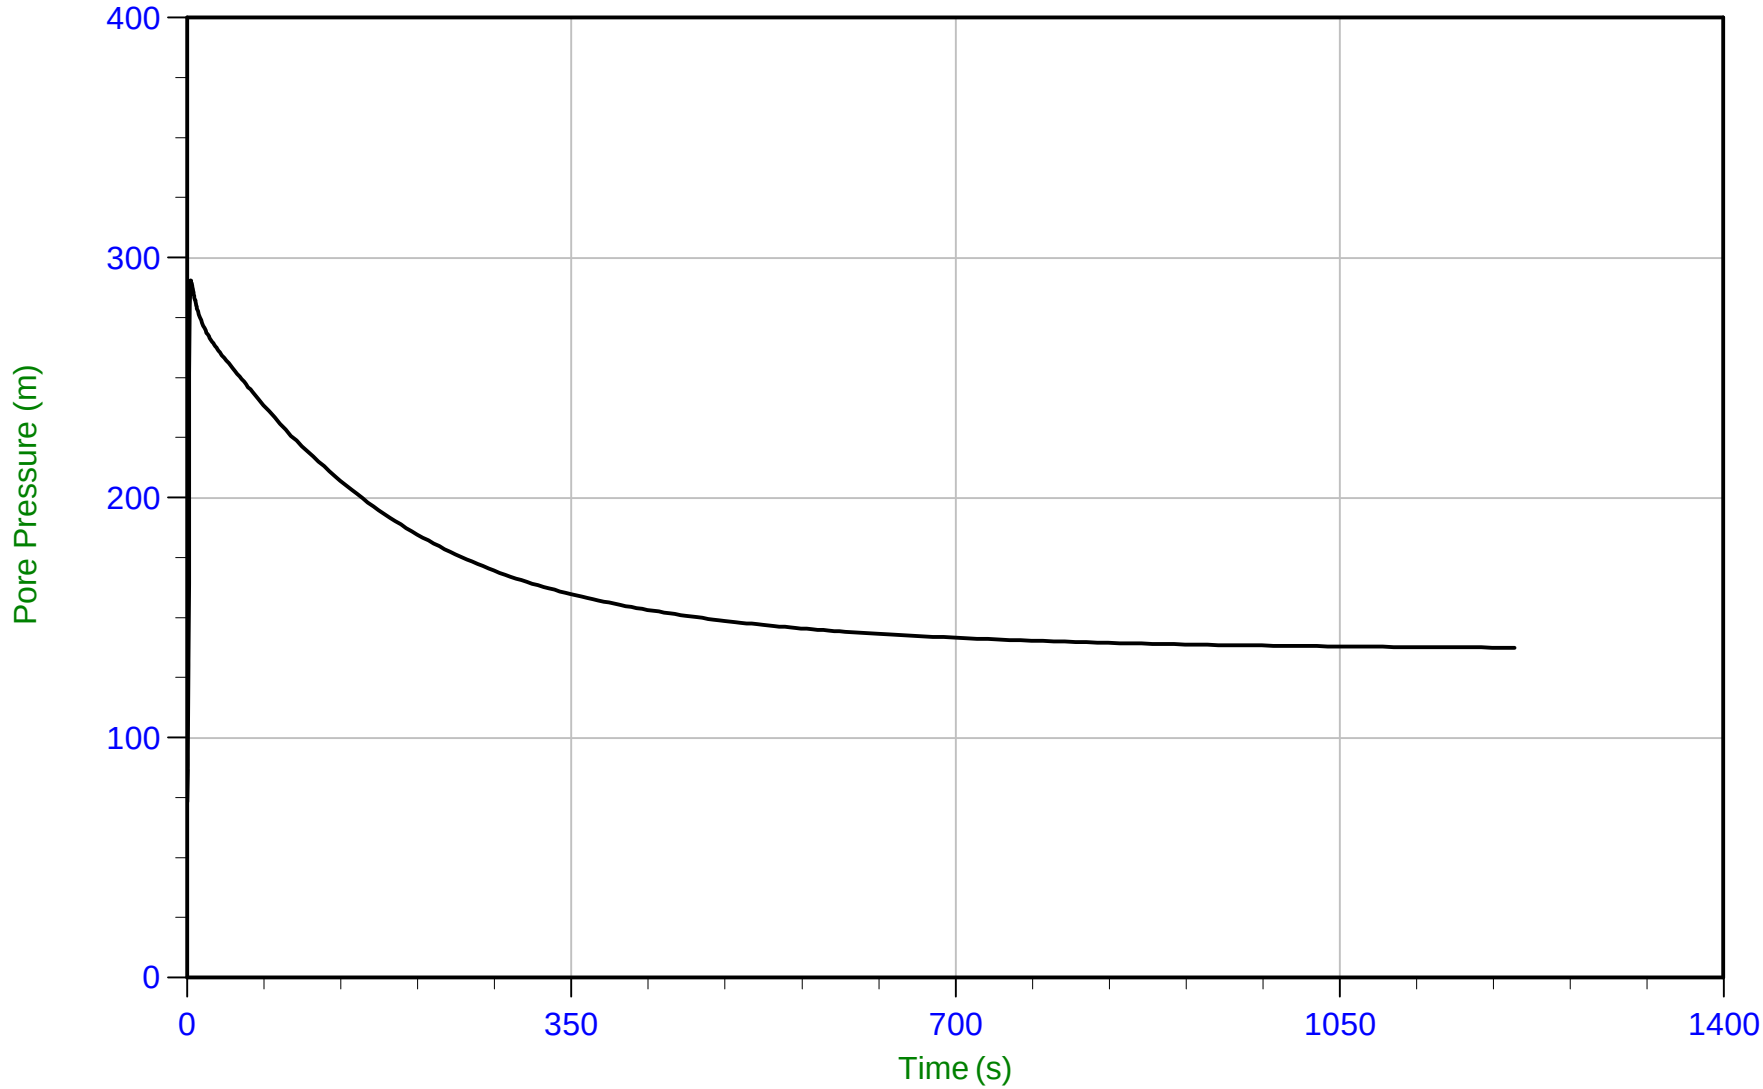

Trace Summary:

Filename: 22-02-23796_RP22-22CPT276B.PPF
Depth: 4.950 m / 16.240 ft
Duration: 1210.0 s


u Min: 73.2 m
u Max: 290.5 m
u Final: 137.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/01/2022 09:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT277
Cone: 854:T1500F15U35 Area=15 cm²

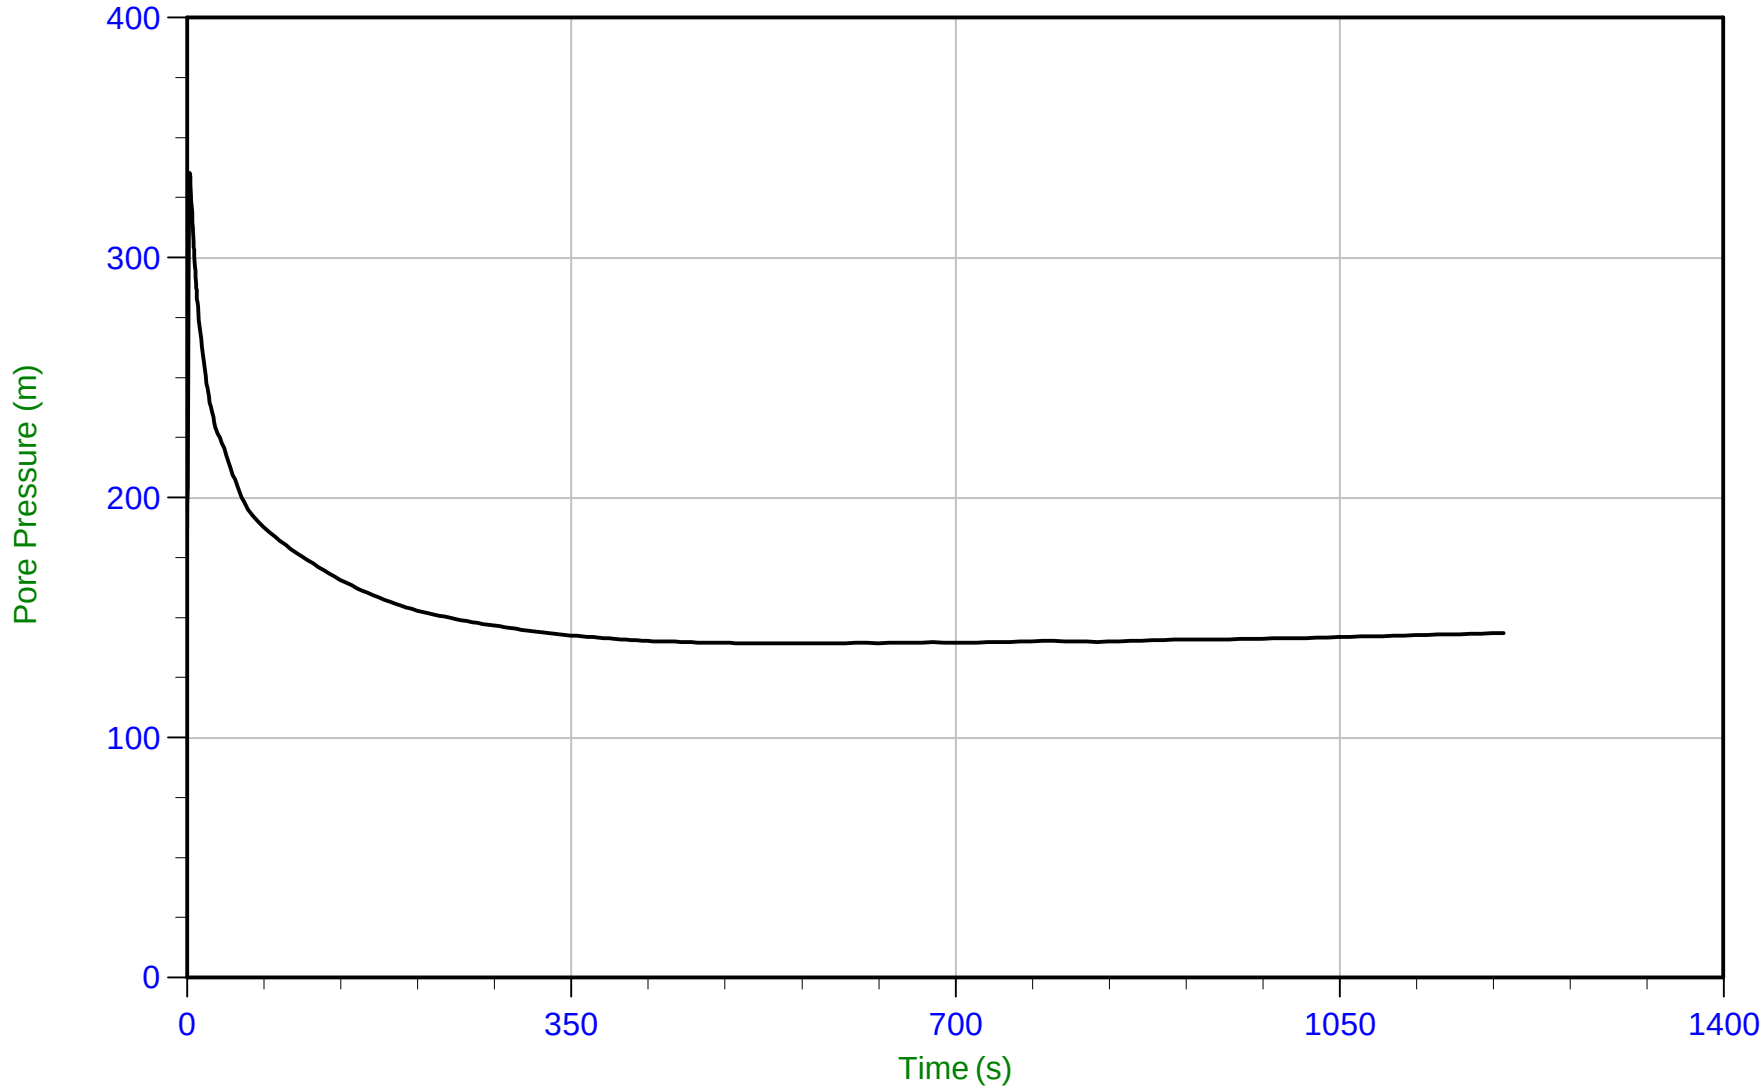

Trace Summary:

Filename: 22-02-23796_RP22-22CPT277.PPF
Depth: 5.450 m / 17.880 ft
Duration: 1200.0 s


u Min: 139.3 m
u Max: 335.3 m
u Final: 143.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/01/2022 10:35
Site: Brooks, Alberta

Sounding: RCPT22-22CPT278
Cone: 854:T1500F15U35 Area=15 cm²

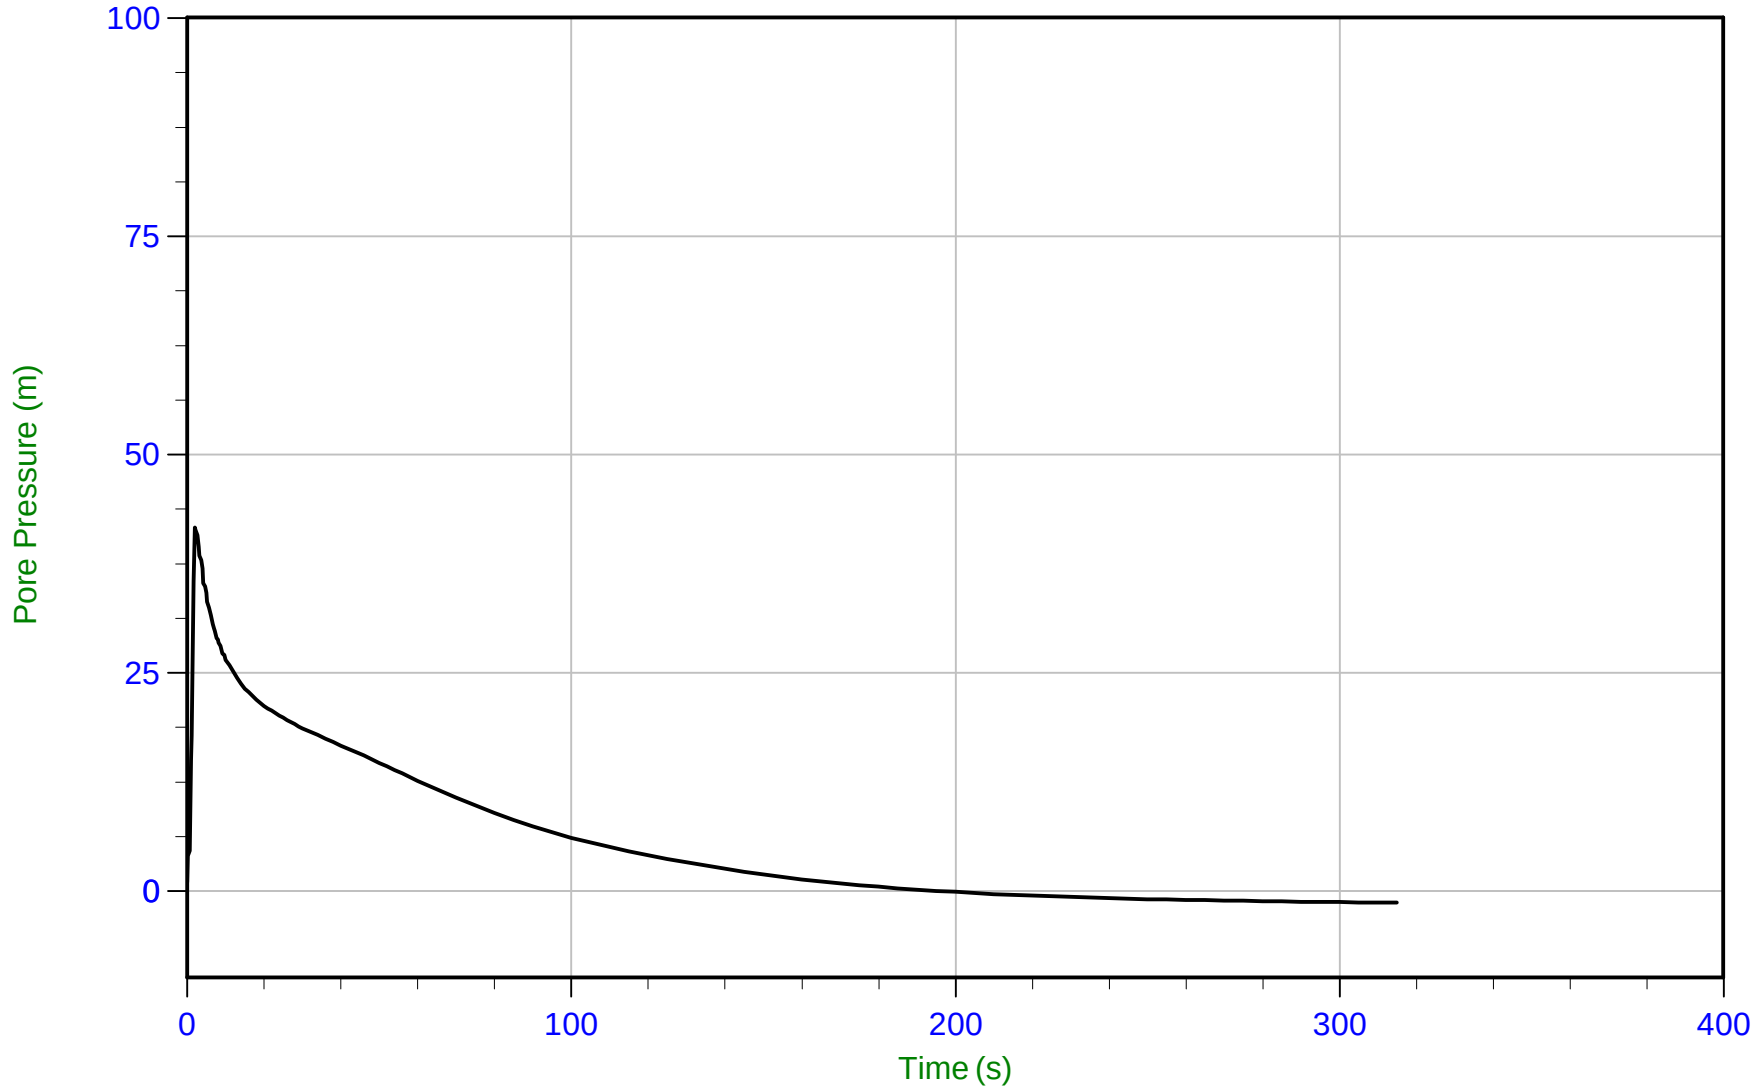

Trace Summary:

Filename: 22-02-23796_RP22-22CPT278.PPF
Depth: 4.825 m / 15.830 ft
Duration: 315.0 s


u Min: -1.4 m
u Max: 41.6 m
u Final: -1.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/01/2022 11:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT279
Cone: 854:T1500F15U35 Area=15 cm²

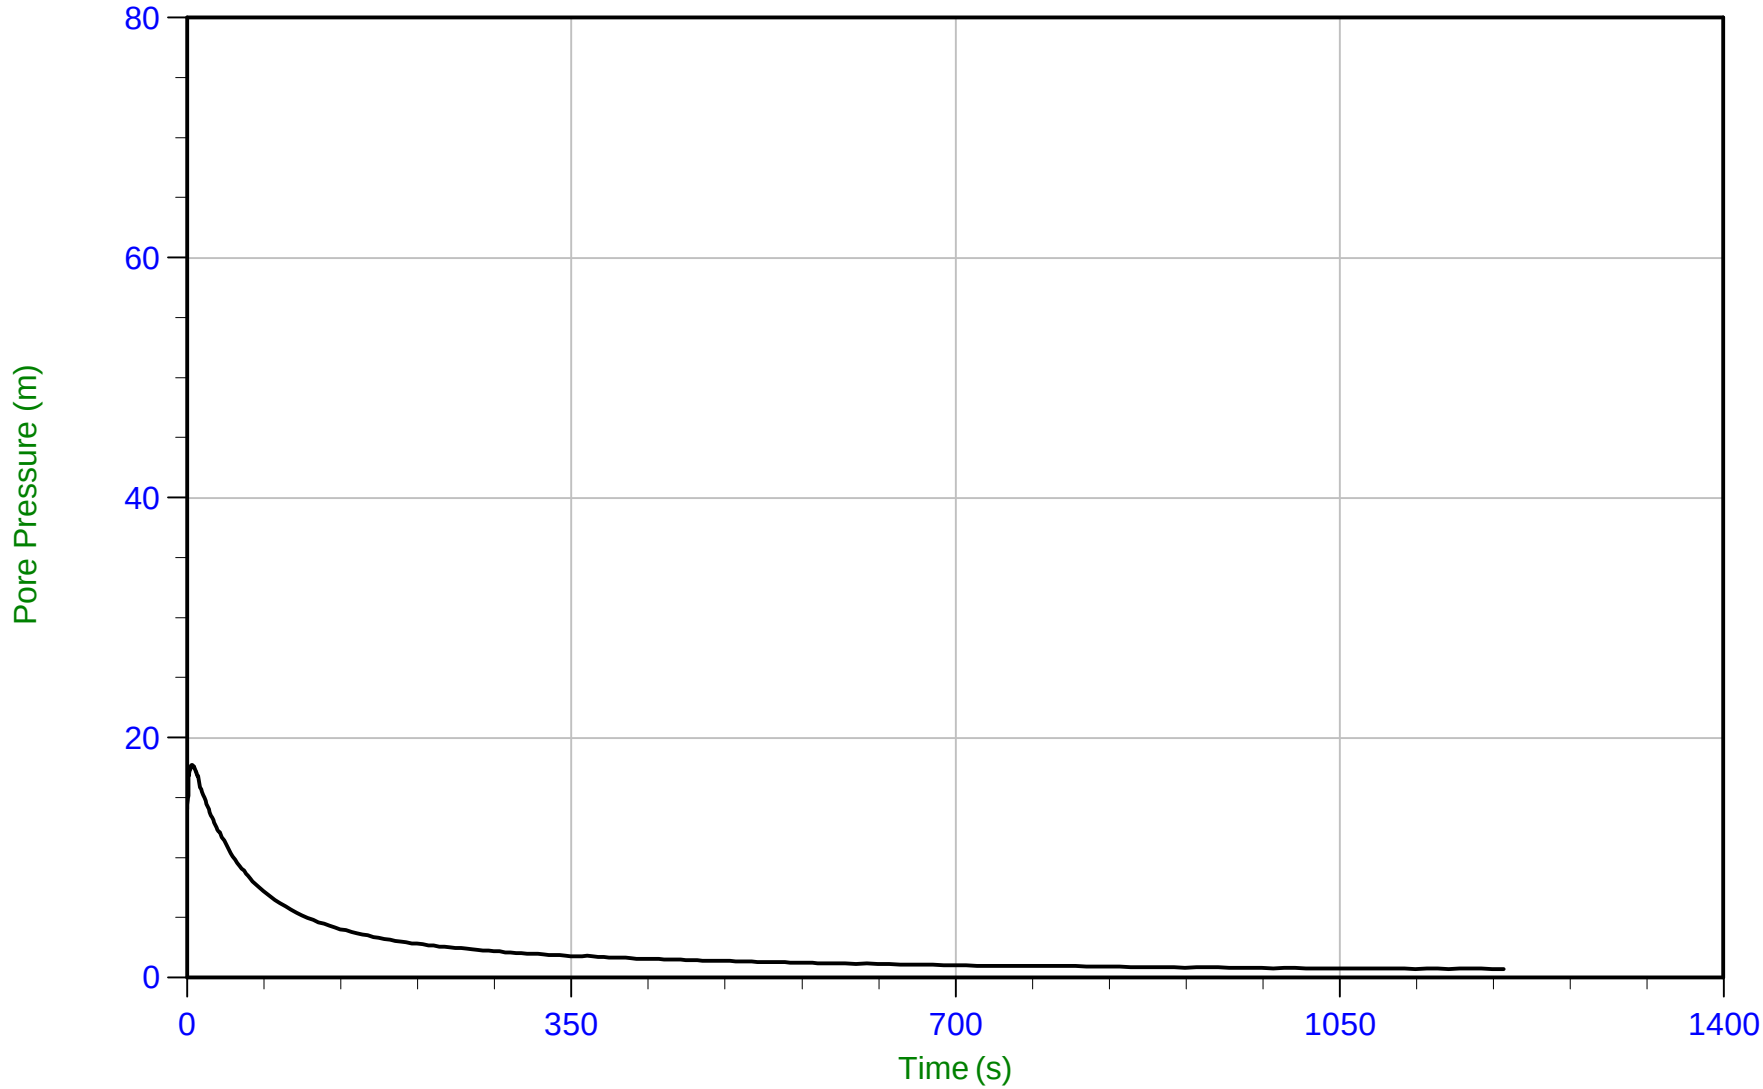

Trace Summary:

Filename: 22-02-23796_RP22-22CPT279.PPF
Depth: 2.850 m / 9.350 ft
Duration: 1200.0 s


u Min: 0.7 m
u Max: 17.7 m
u Final: 0.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/01/2022 11:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT279
Cone: 854:T1500F15U35 Area=15 cm²

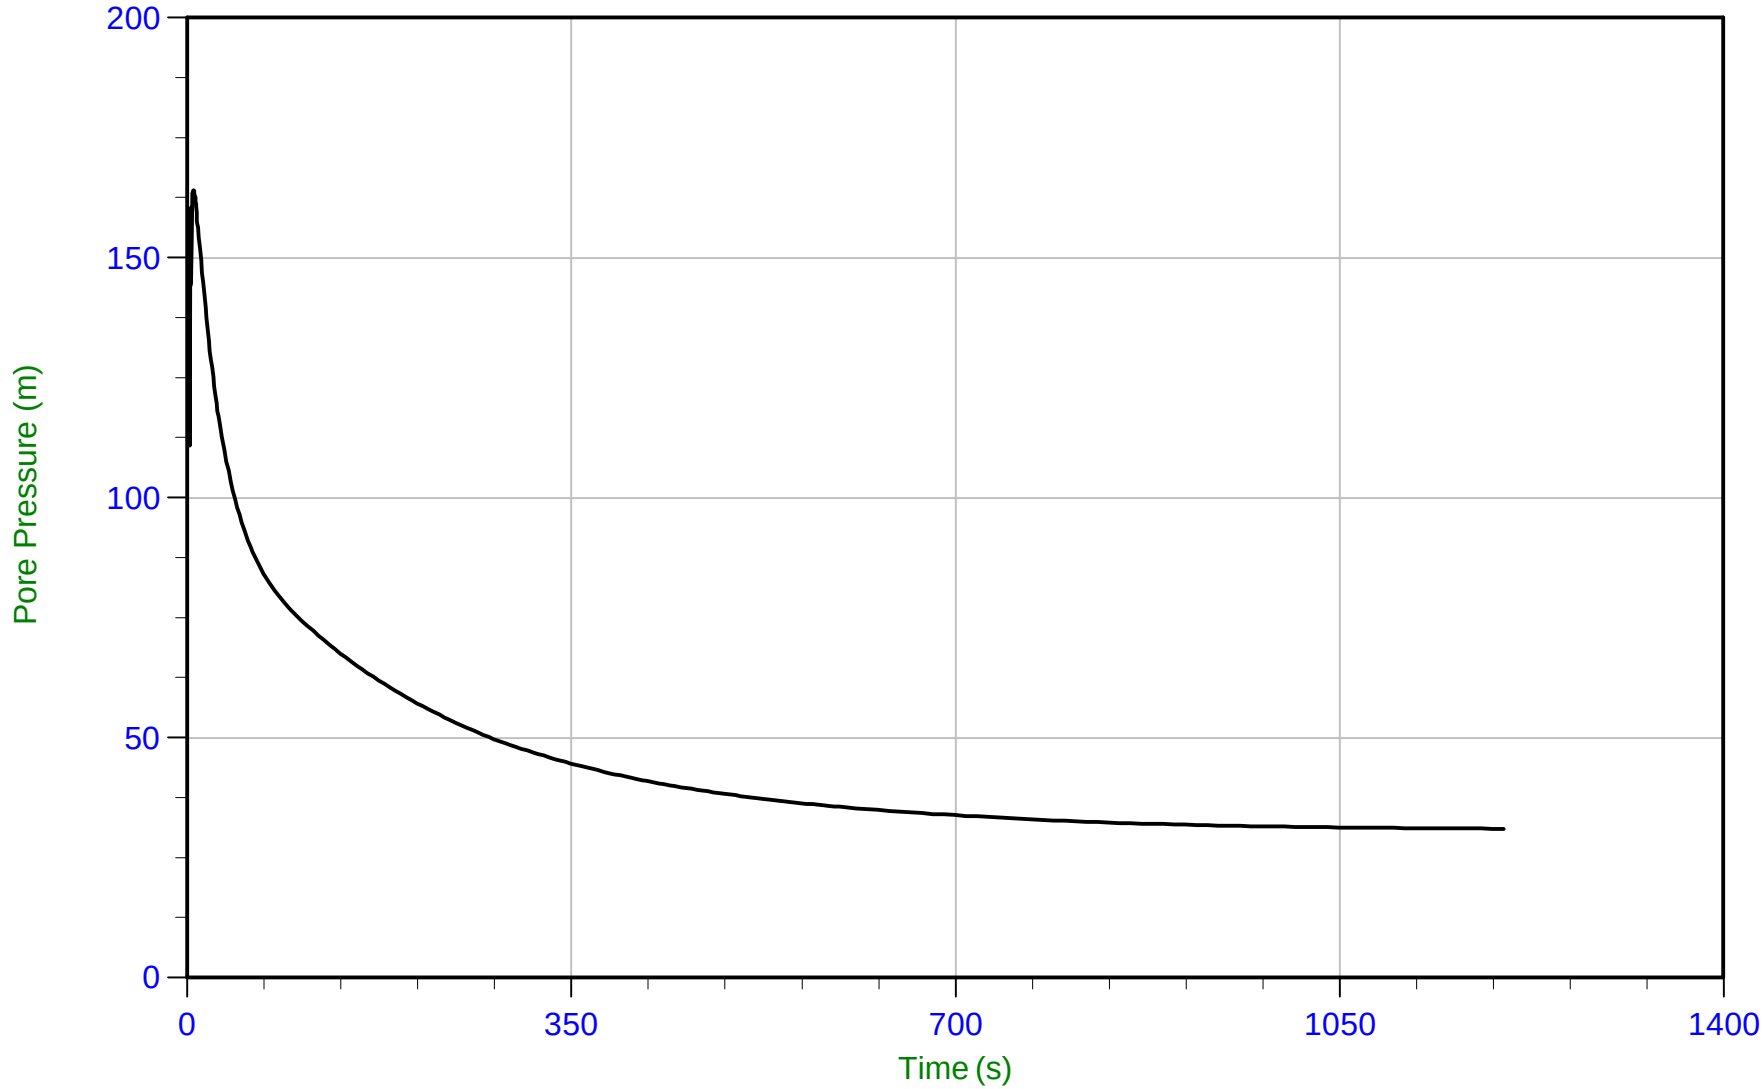

Trace Summary:

Filename: 22-02-23796_RP22-22CPT279.PPF
Depth: 5.900 m / 19.357 ft
Duration: 1200.0 s


u Min: 31.0 m
u Max: 164.0 m
u Final: 31.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/01/2022 12:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT280
Cone: 854:T1500F15U35 Area=15 cm²

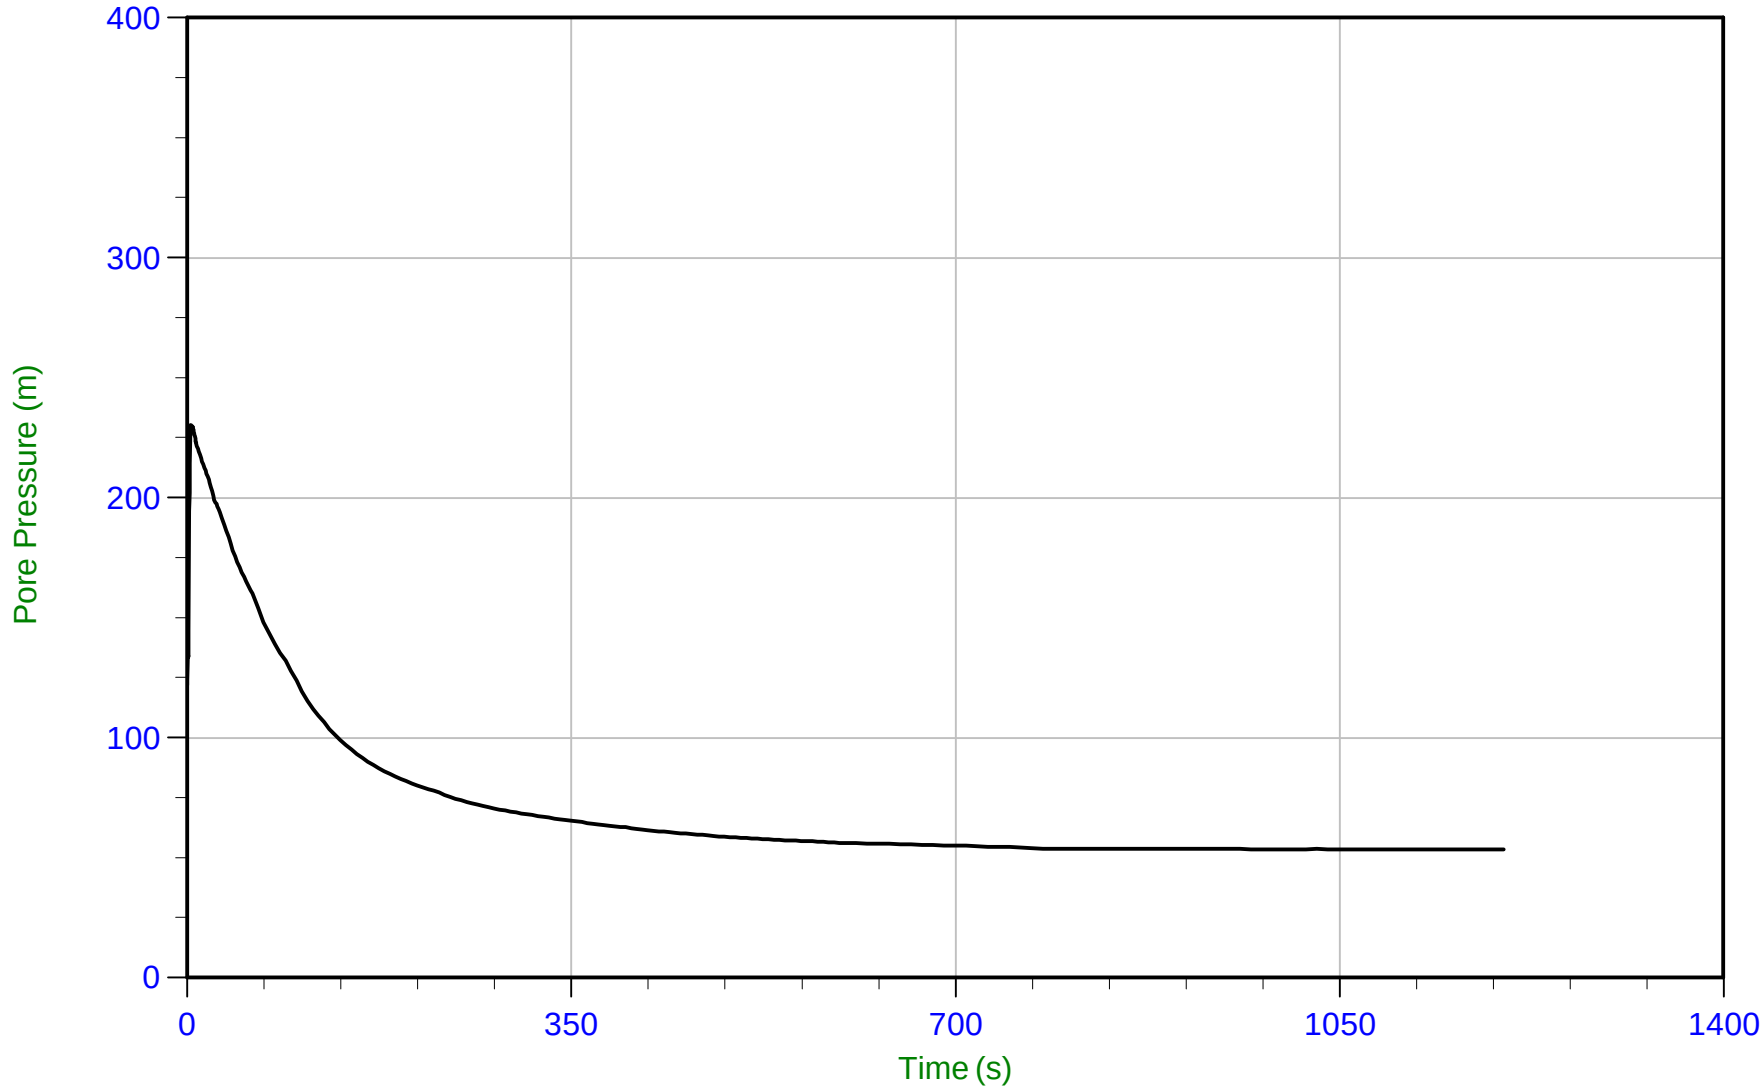

Trace Summary:

Filename: 22-02-23796_RP22-22CPT280.PPF
Depth: 4.300 m / 14.107 ft
Duration: 1200.0 s


u Min: 53.4 m
u Max: 230.3 m
u Final: 53.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/01/2022 12:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT280
Cone: 854:T1500F15U35 Area=15 cm²

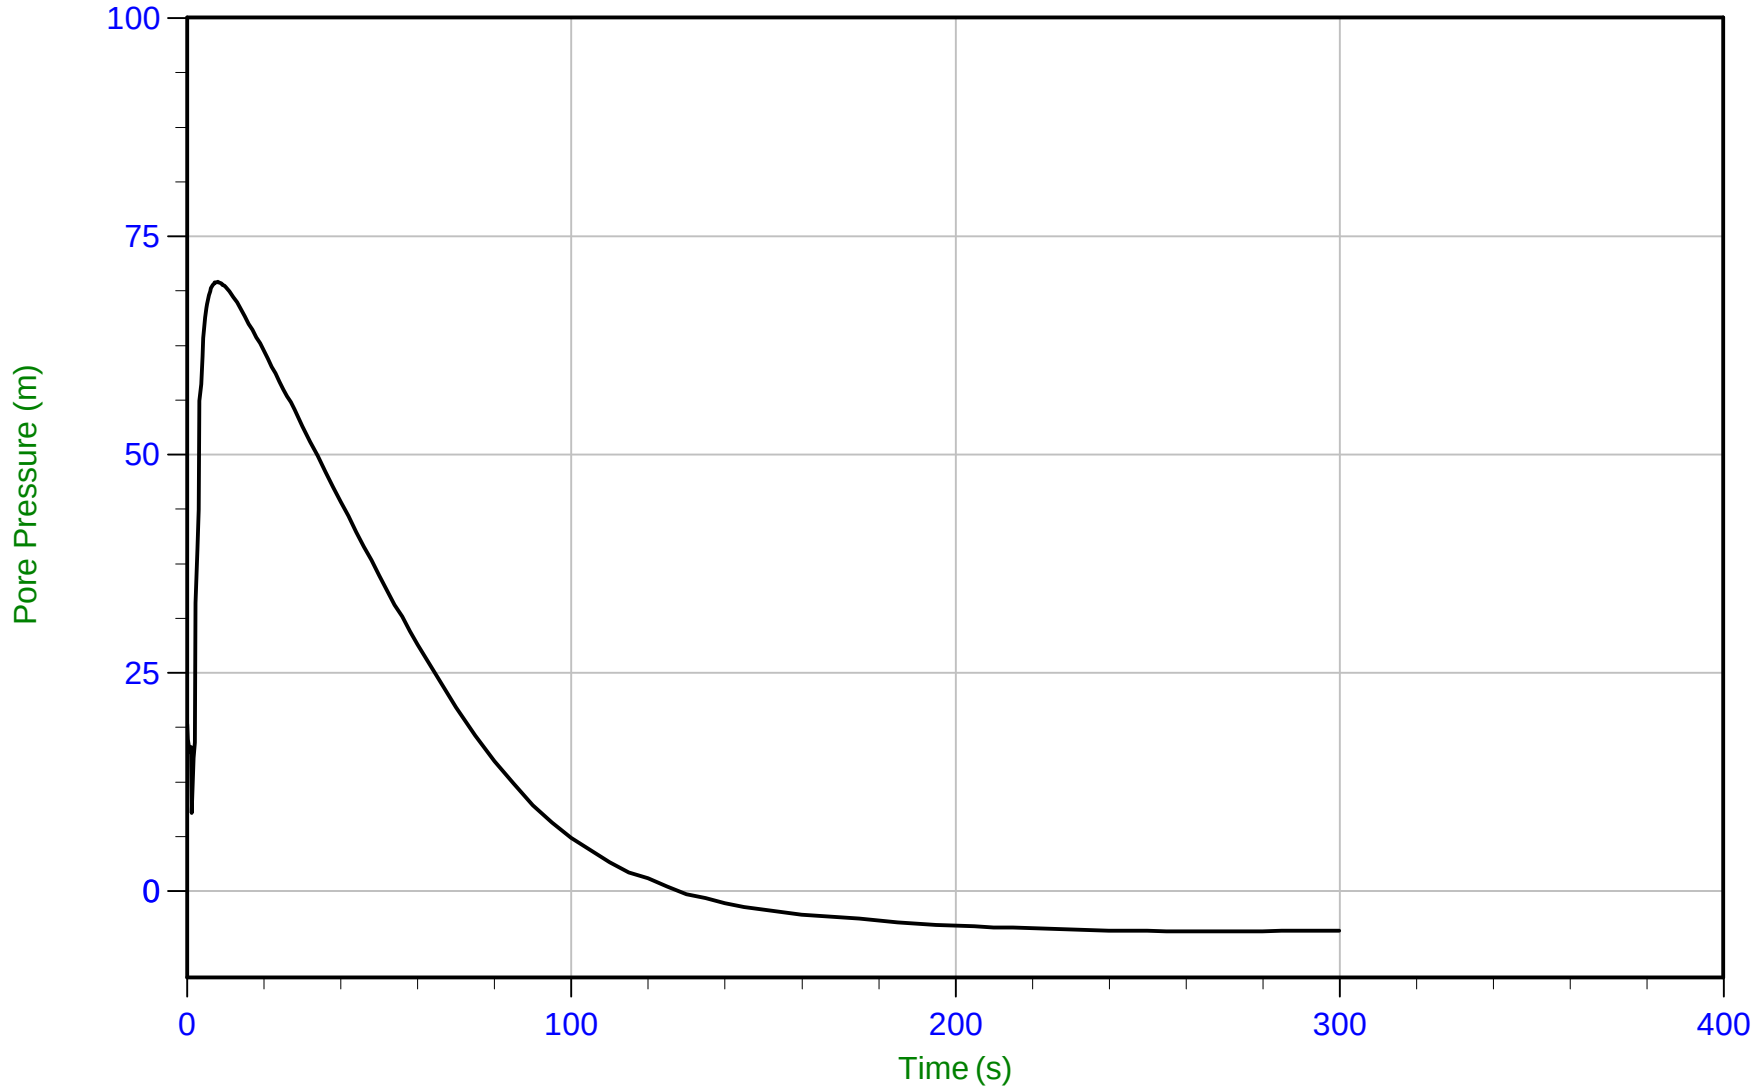

Trace Summary:

Filename: 22-02-23796_RP22-22CPT280.PPF
Depth: 12.025 m / 39.452 ft
Duration: 300.0 s


u Min: -4.7 m
u Max: 69.7 m
u Final: -4.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 06:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT281
Cone: 854:T1500F15U35 Area=15 cm²

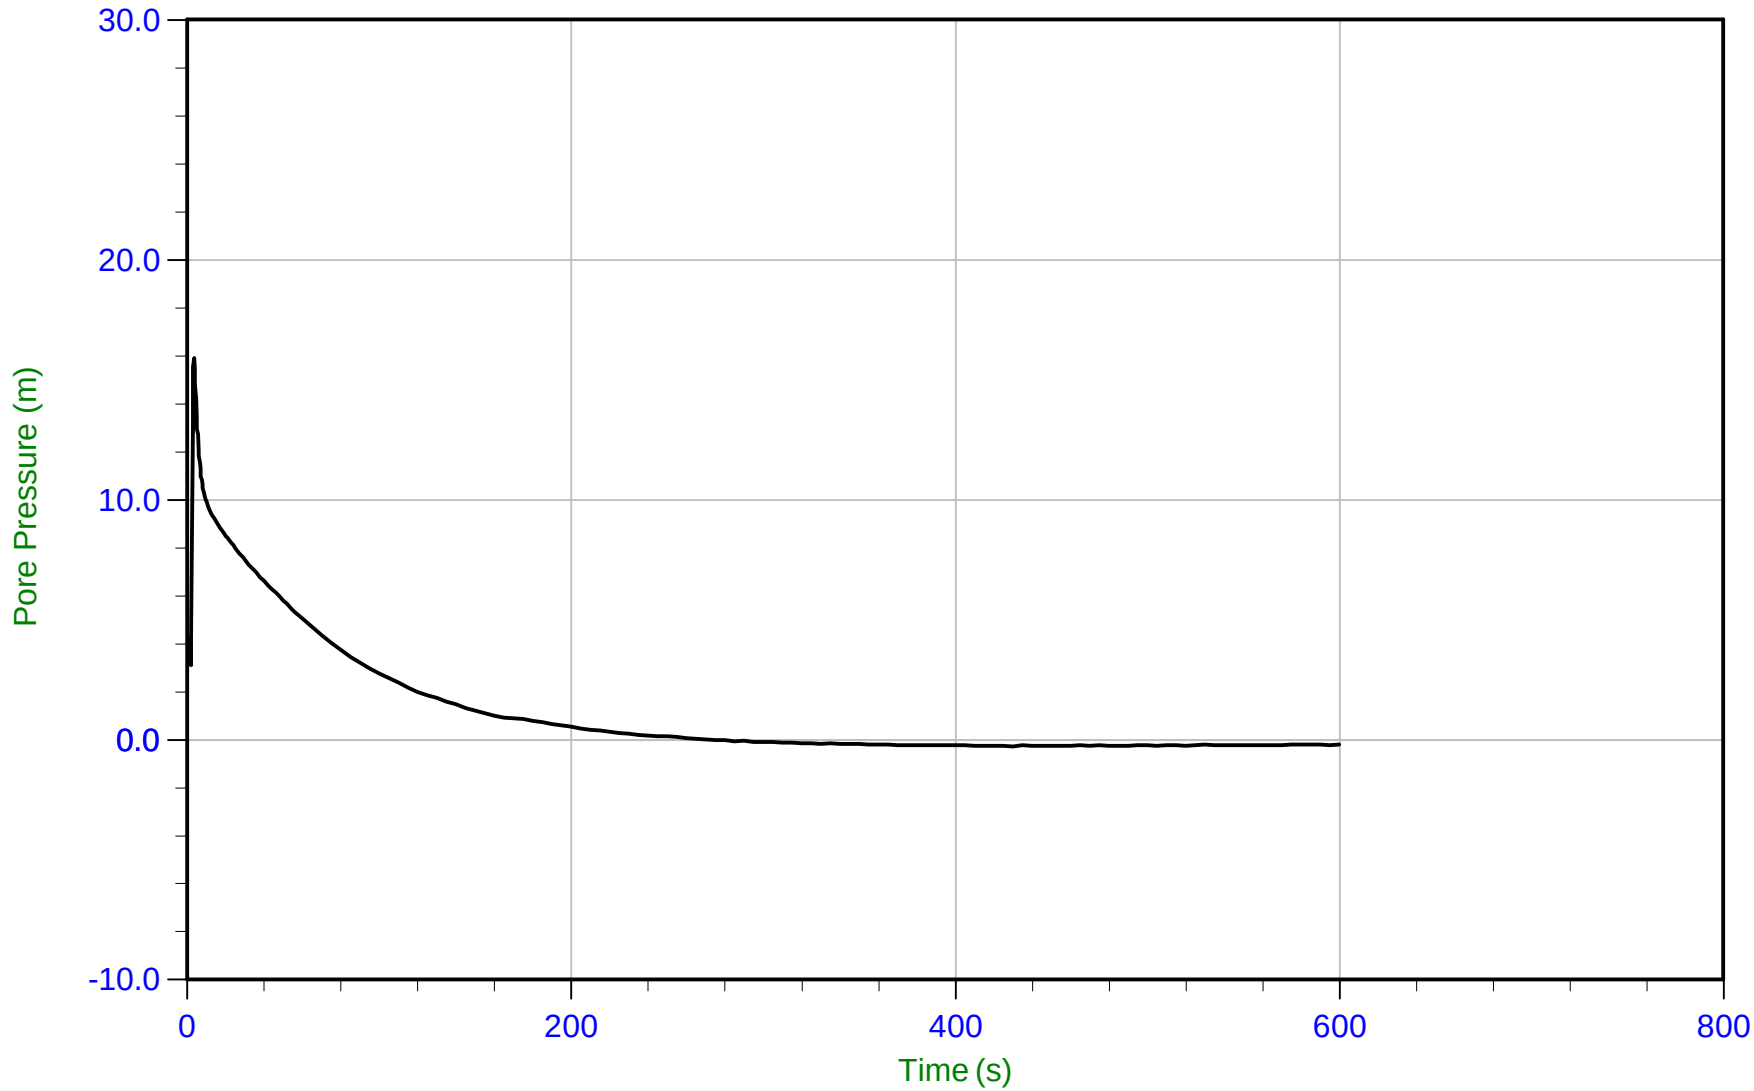

Trace Summary:

Filename: 22-02-23796_RP22-22CPT281.PPF
Depth: 6.875 m / 22.556 ft
Duration: 600.0 s


u Min: -0.3 m
u Max: 15.9 m
u Final: -0.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 03/29/2022 06:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT281
Cone: 854:T1500F15U35 Area=15 cm²

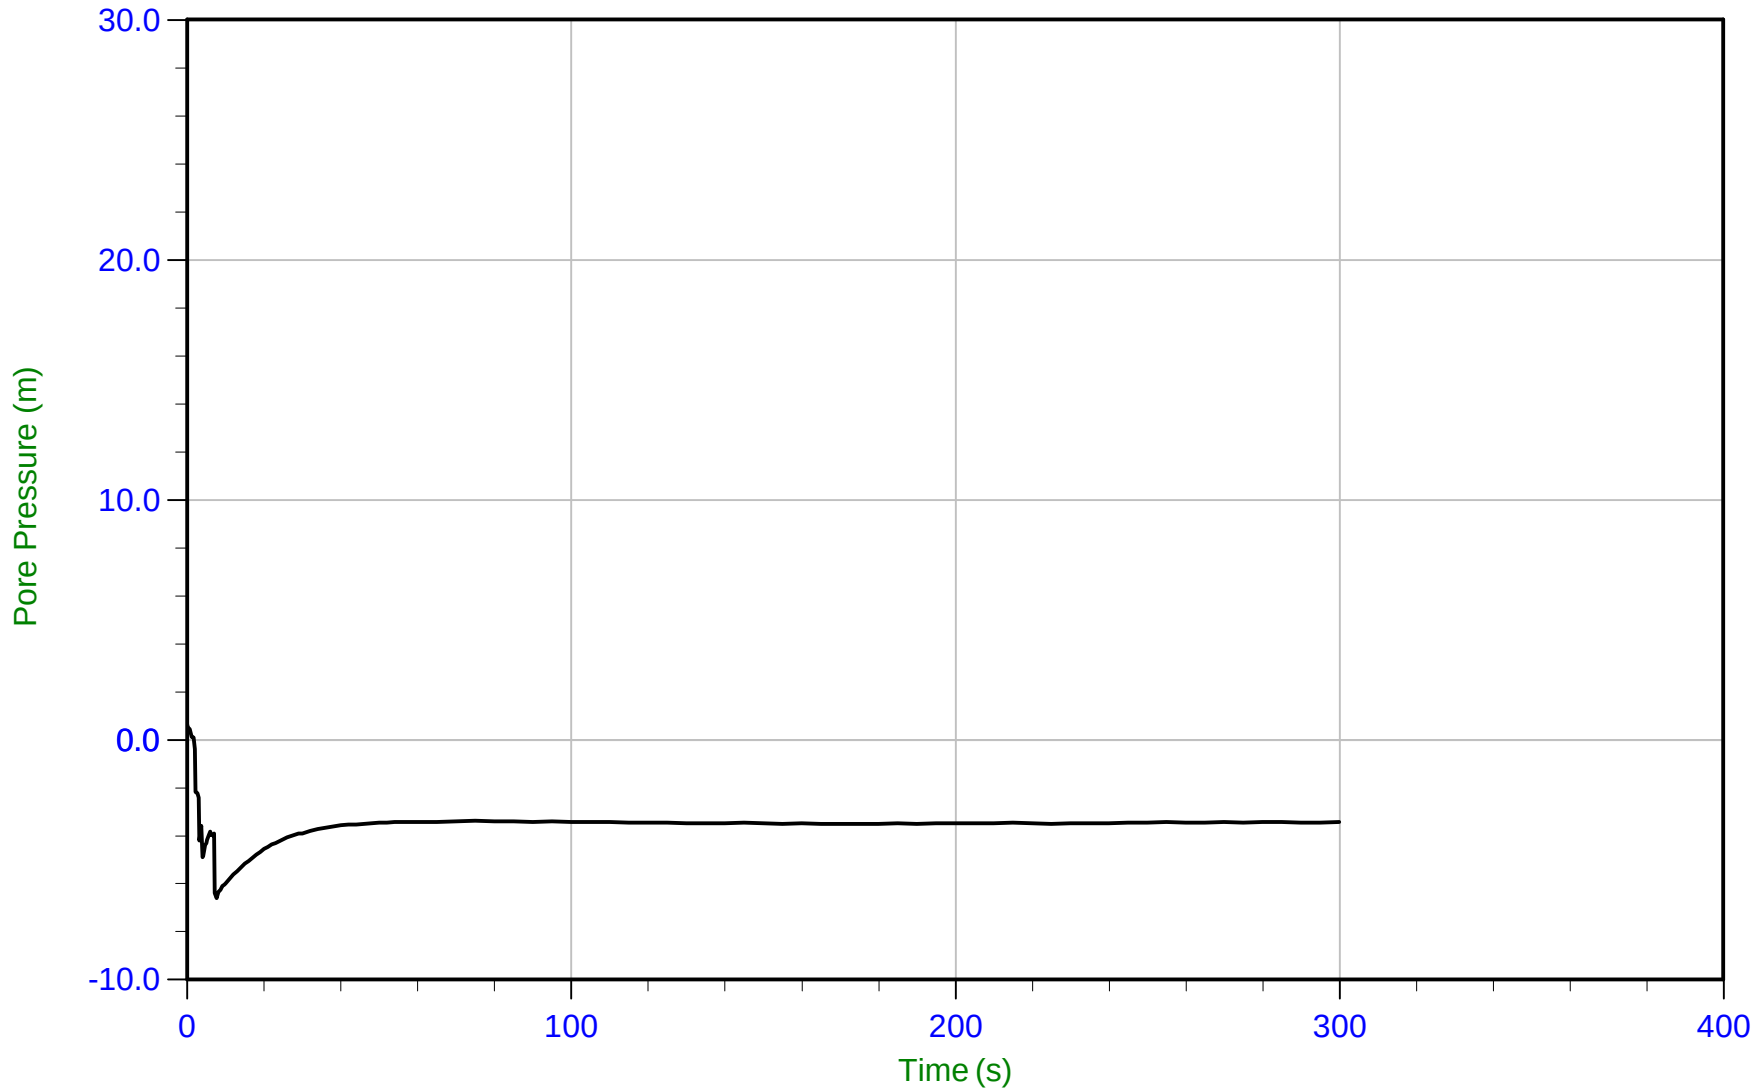

Trace Summary:

Filename: 22-02-23796_RP22-22CPT281.PPF
Depth: 7.675 m / 25.180 ft
Duration: 300.0 s


u Min: -6.6 m
u Max: 0.6 m
u Final: -3.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/01/2022 14:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT282
Cone: 854:T1500F15U35 Area=15 cm²

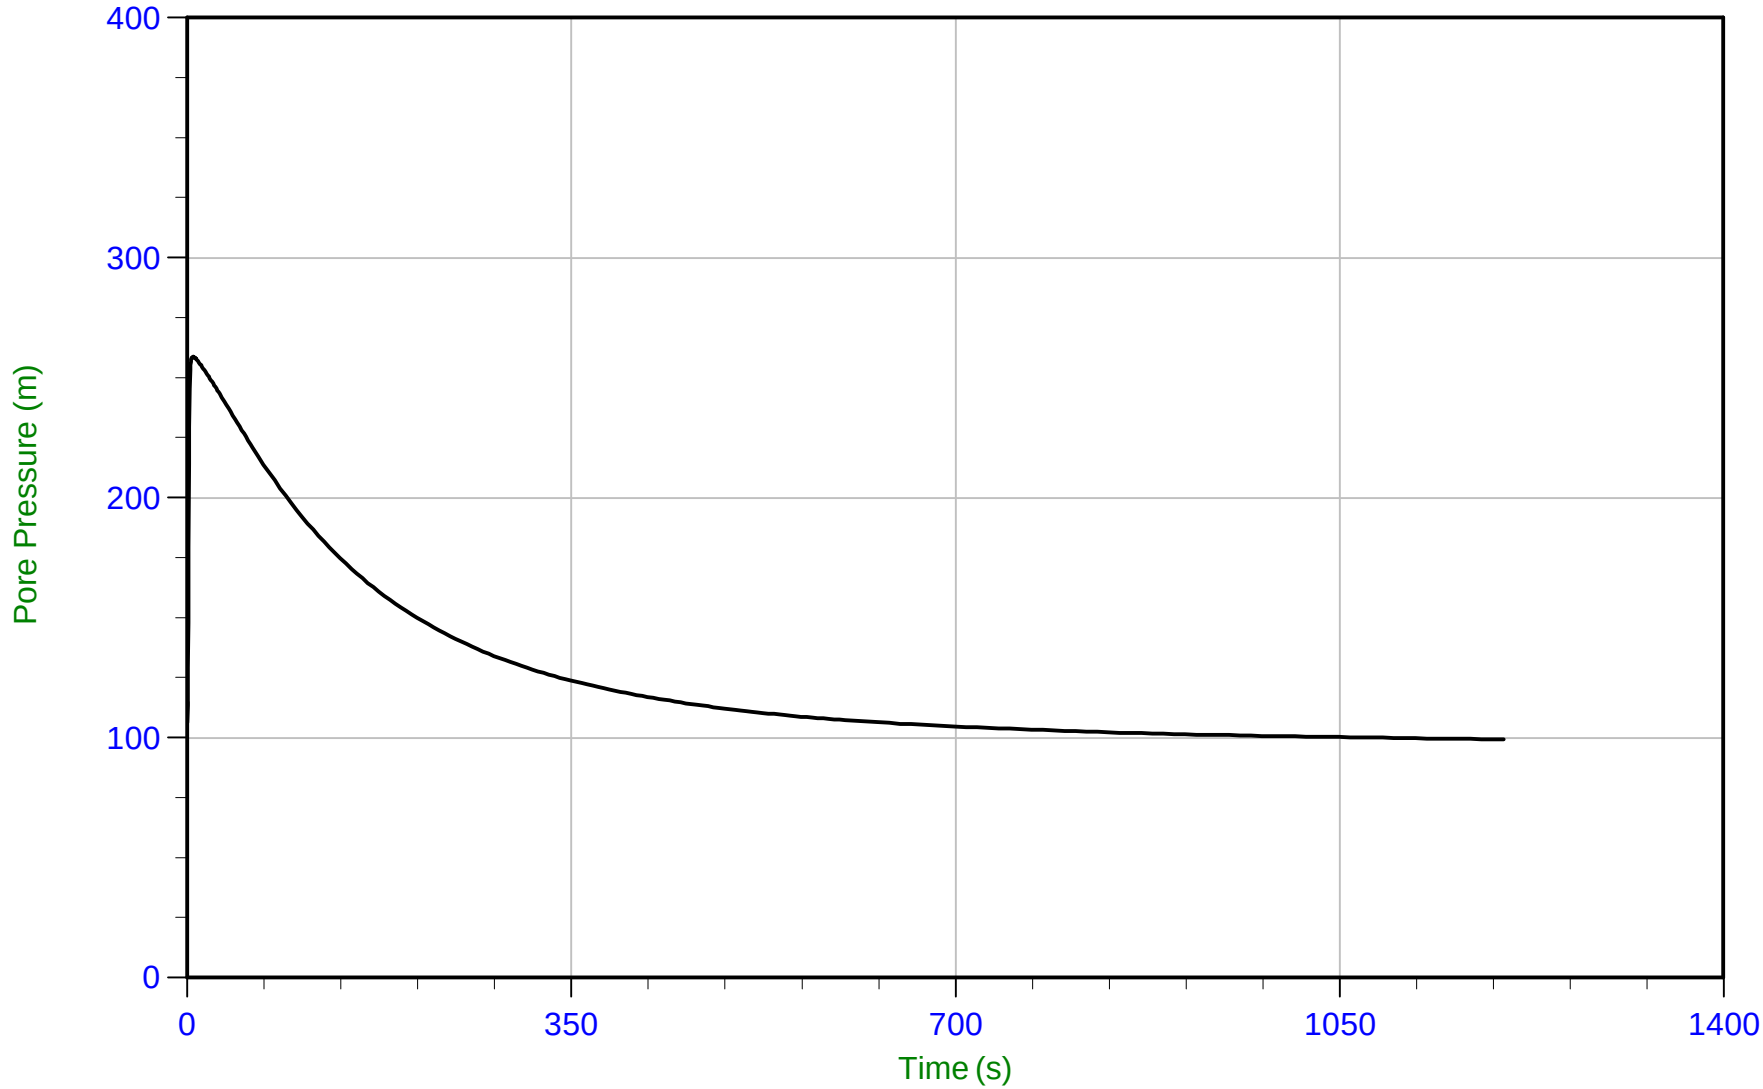

Trace Summary:

Filename: 22-02-23796_RP22-22CPT282.PPF
Depth: 7.475 m / 24.524 ft
Duration: 1200.0 s


u Min: 99.3 m
u Max: 258.7 m
u Final: 99.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/01/2022 15:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT283
Cone: 854:T1500F15U35 Area=15 cm²

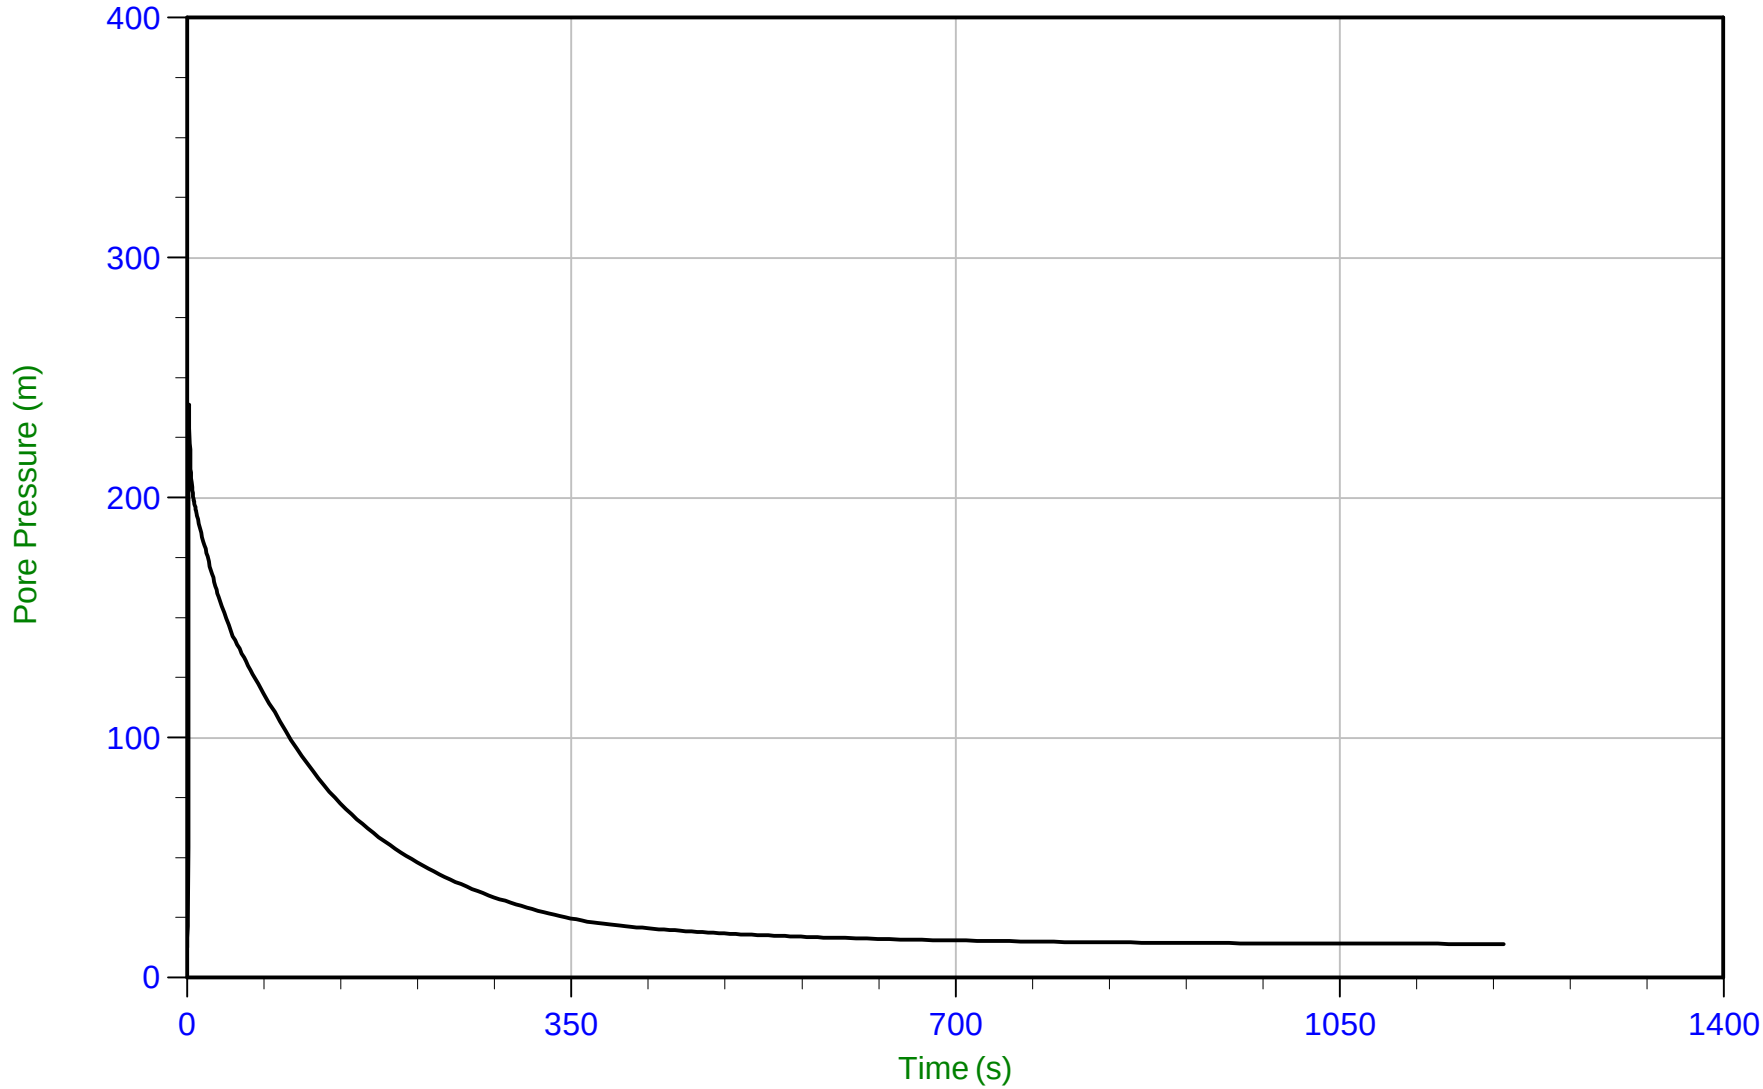

Trace Summary:

Filename: 22-02-23796_RP22-22CPT283.PPF
Depth: 4.875 m / 15.994 ft
Duration: 1200.0 s


u Min: 12.8 m
u Max: 238.8 m
u Final: 14.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 10:02
Site: Brooks, Alberta

Sounding: RCPT22-22CPT284
Cone: 854:T1500F15U35 Area=15 cm²

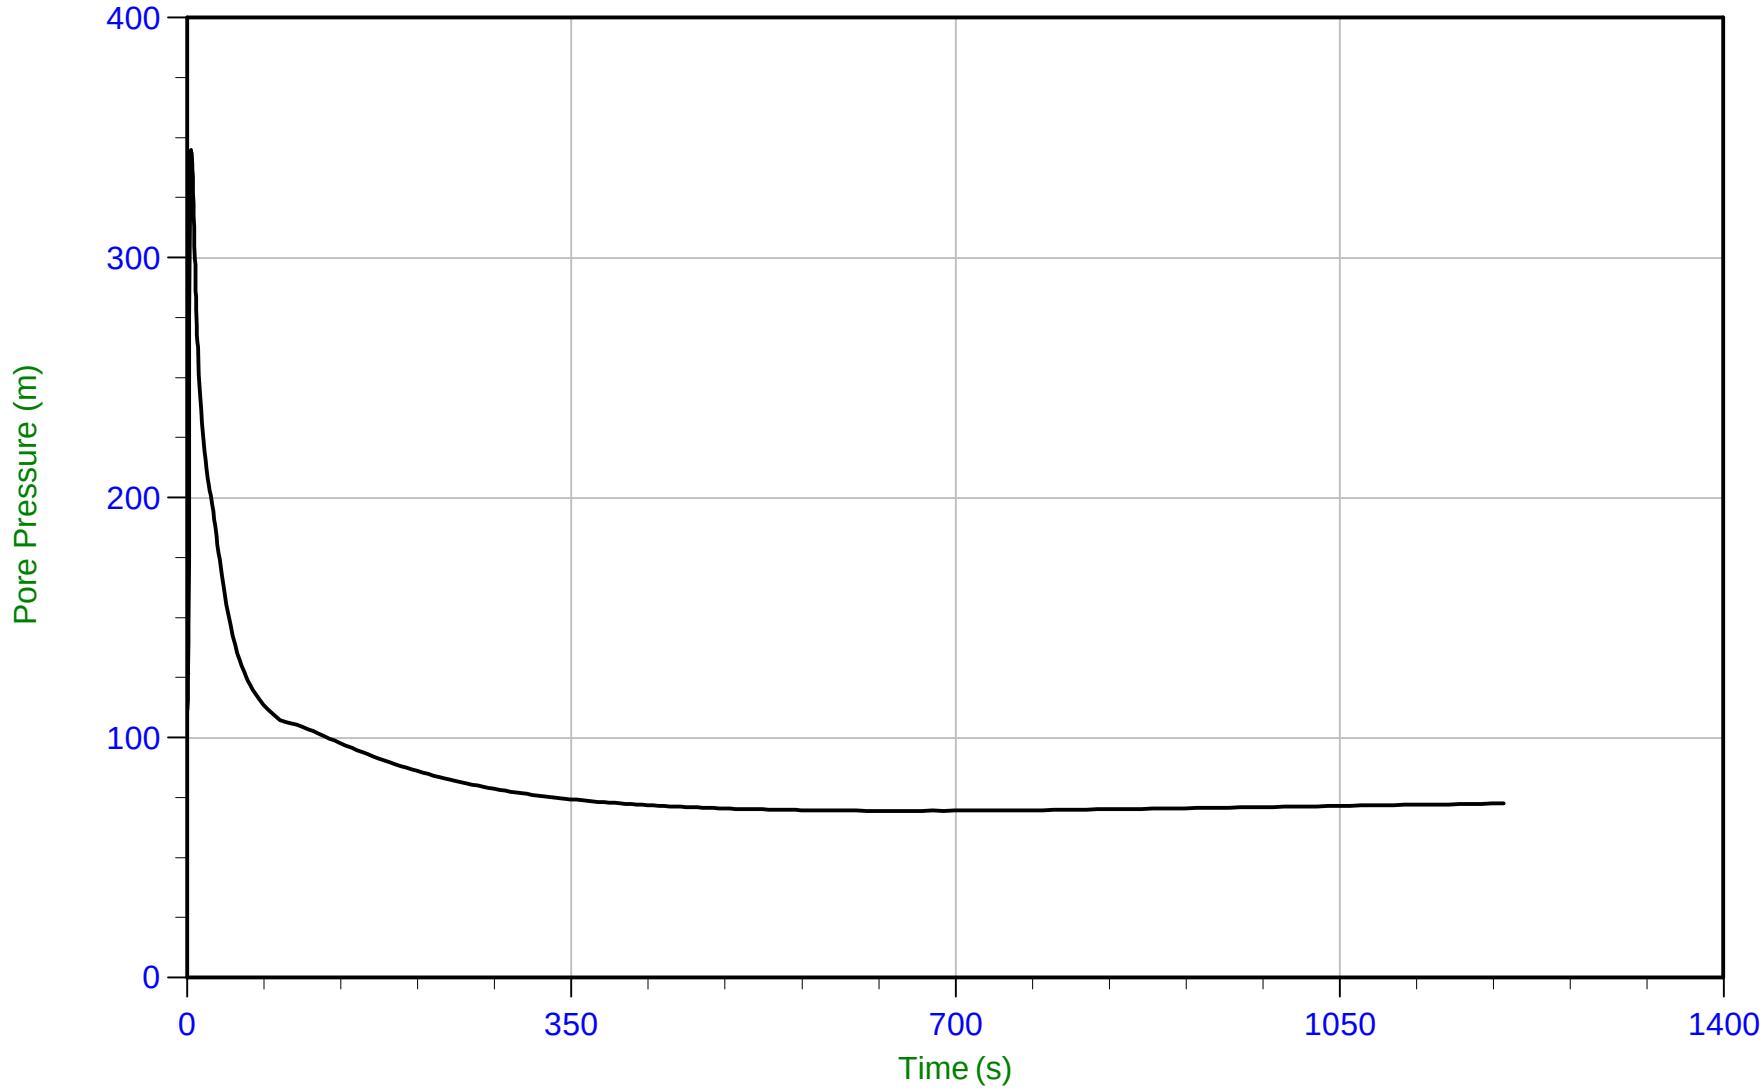

Trace Summary:

Filename: 22-02-23796_RP22-22CPT284.PPF
Depth: 5.125 m / 16.814 ft
Duration: 1200.0 s


u Min: 69.6 m
u Max: 344.9 m
u Final: 72.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/02/2022 10:02
Site: Brooks, Alberta

Sounding: RCPT22-22CPT284
Cone: 854:T1500F15U35 Area=15 cm²

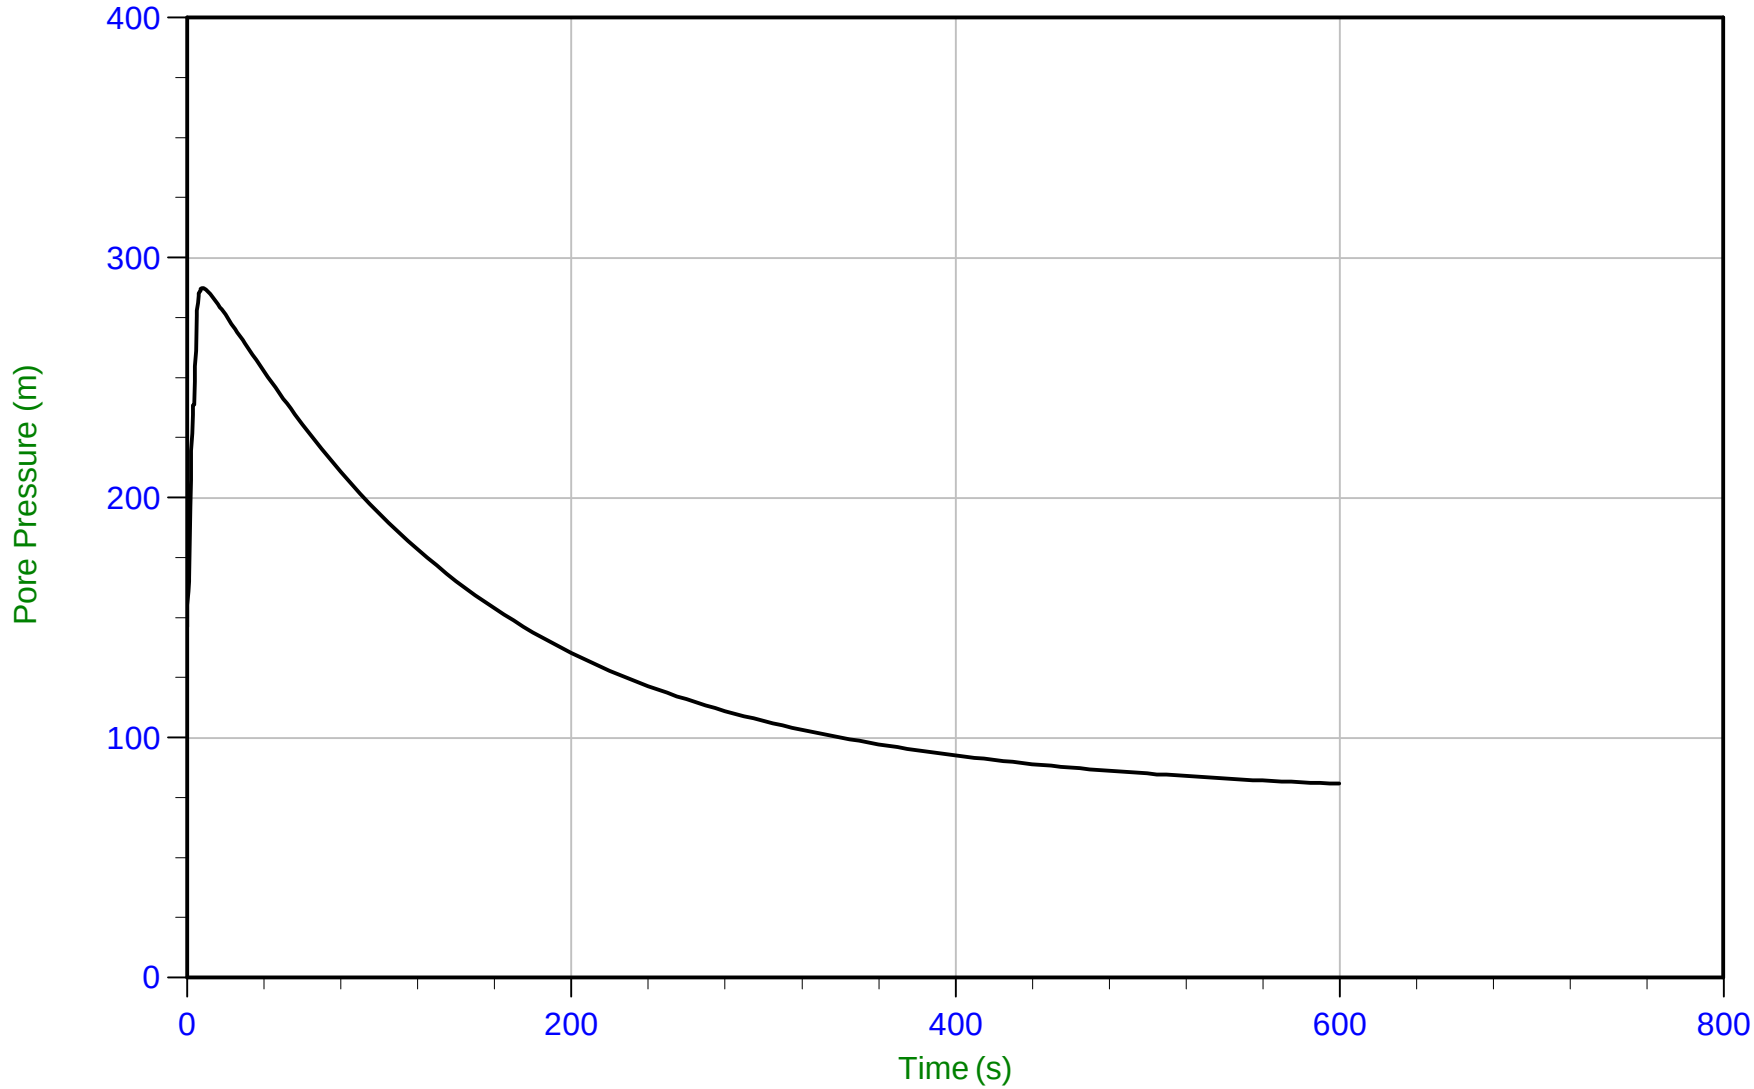

Trace Summary:

Filename: 22-02-23796_RP22-22CPT284.PPF
Depth: 10.075 m / 33.054 ft
Duration: 600.0 s


u Min: 80.8 m
u Max: 287.4 m
u Final: 80.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 09:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT286
Cone: 854:T1500F15U35 Area=15 cm²

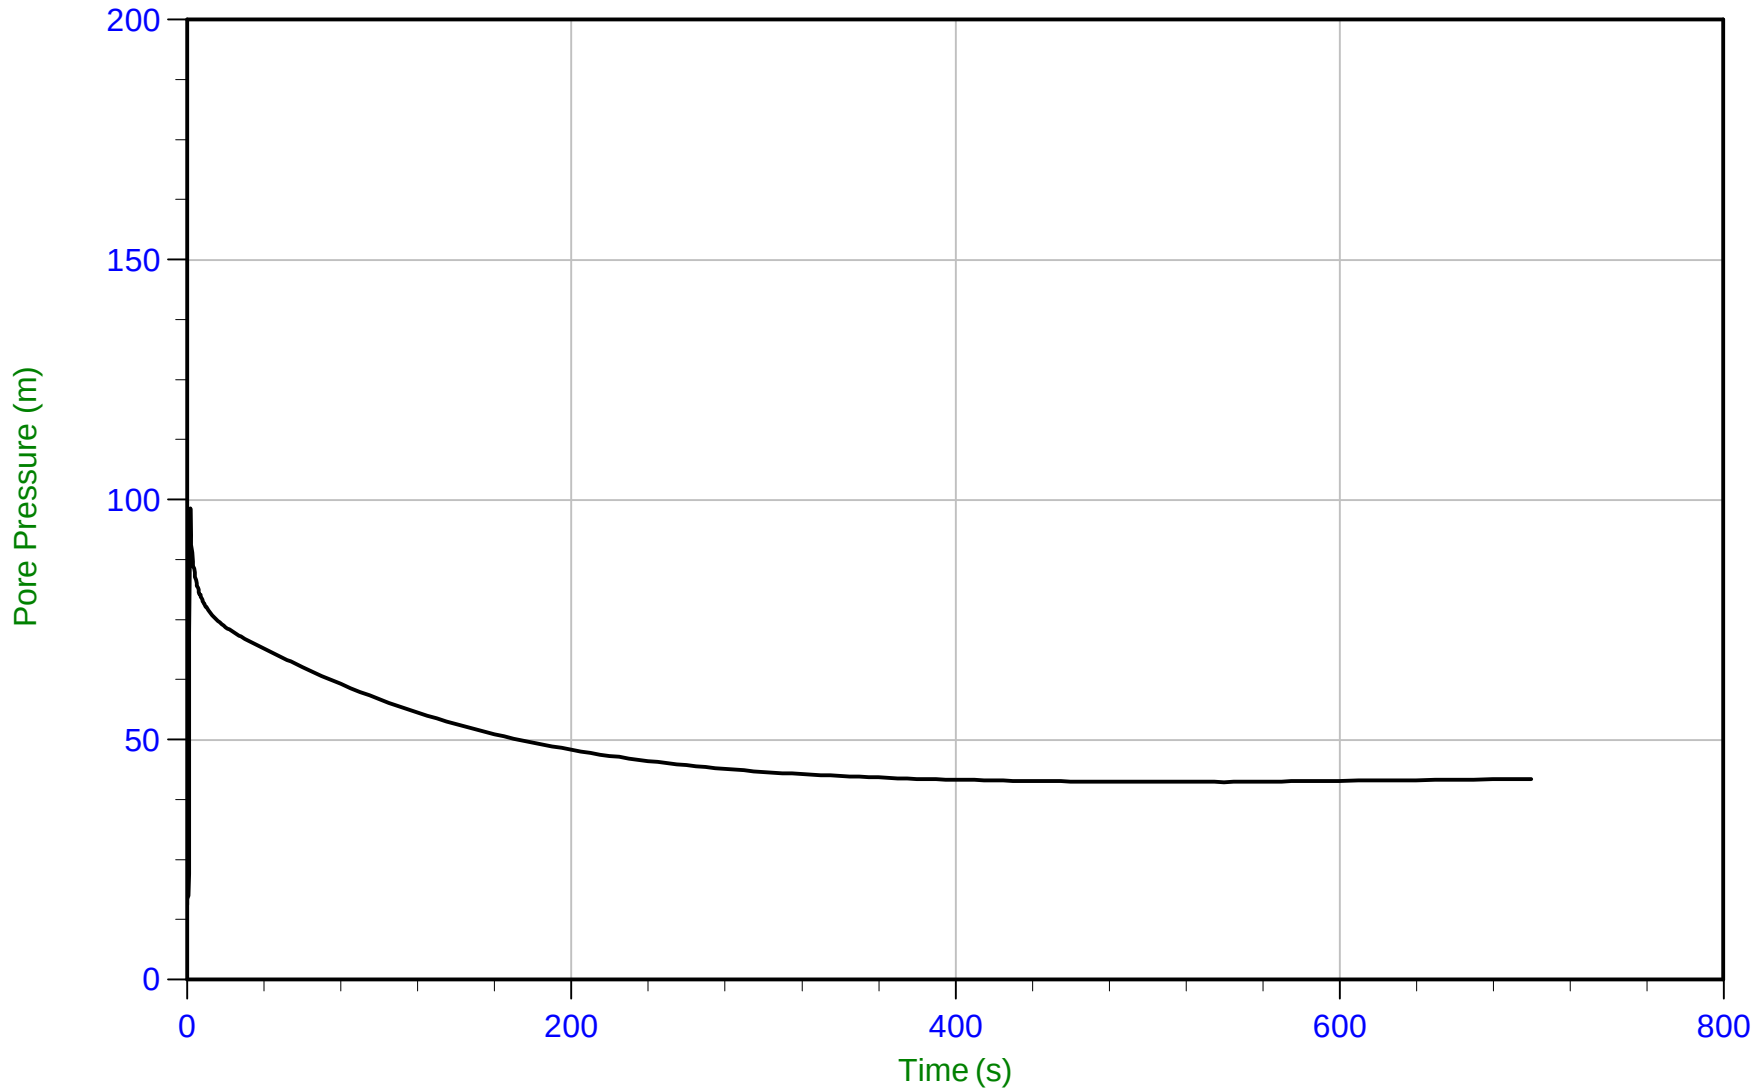

Trace Summary:

Filename: 22-02-23796_RP22-22CPT286.PPF
Depth: 3.925 m / 12.877 ft
Duration: 700.0 s


u Min: 15.7 m
u Max: 98.2 m
u Final: 41.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 09:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT286
Cone: 854:T1500F15U35 Area=15 cm²

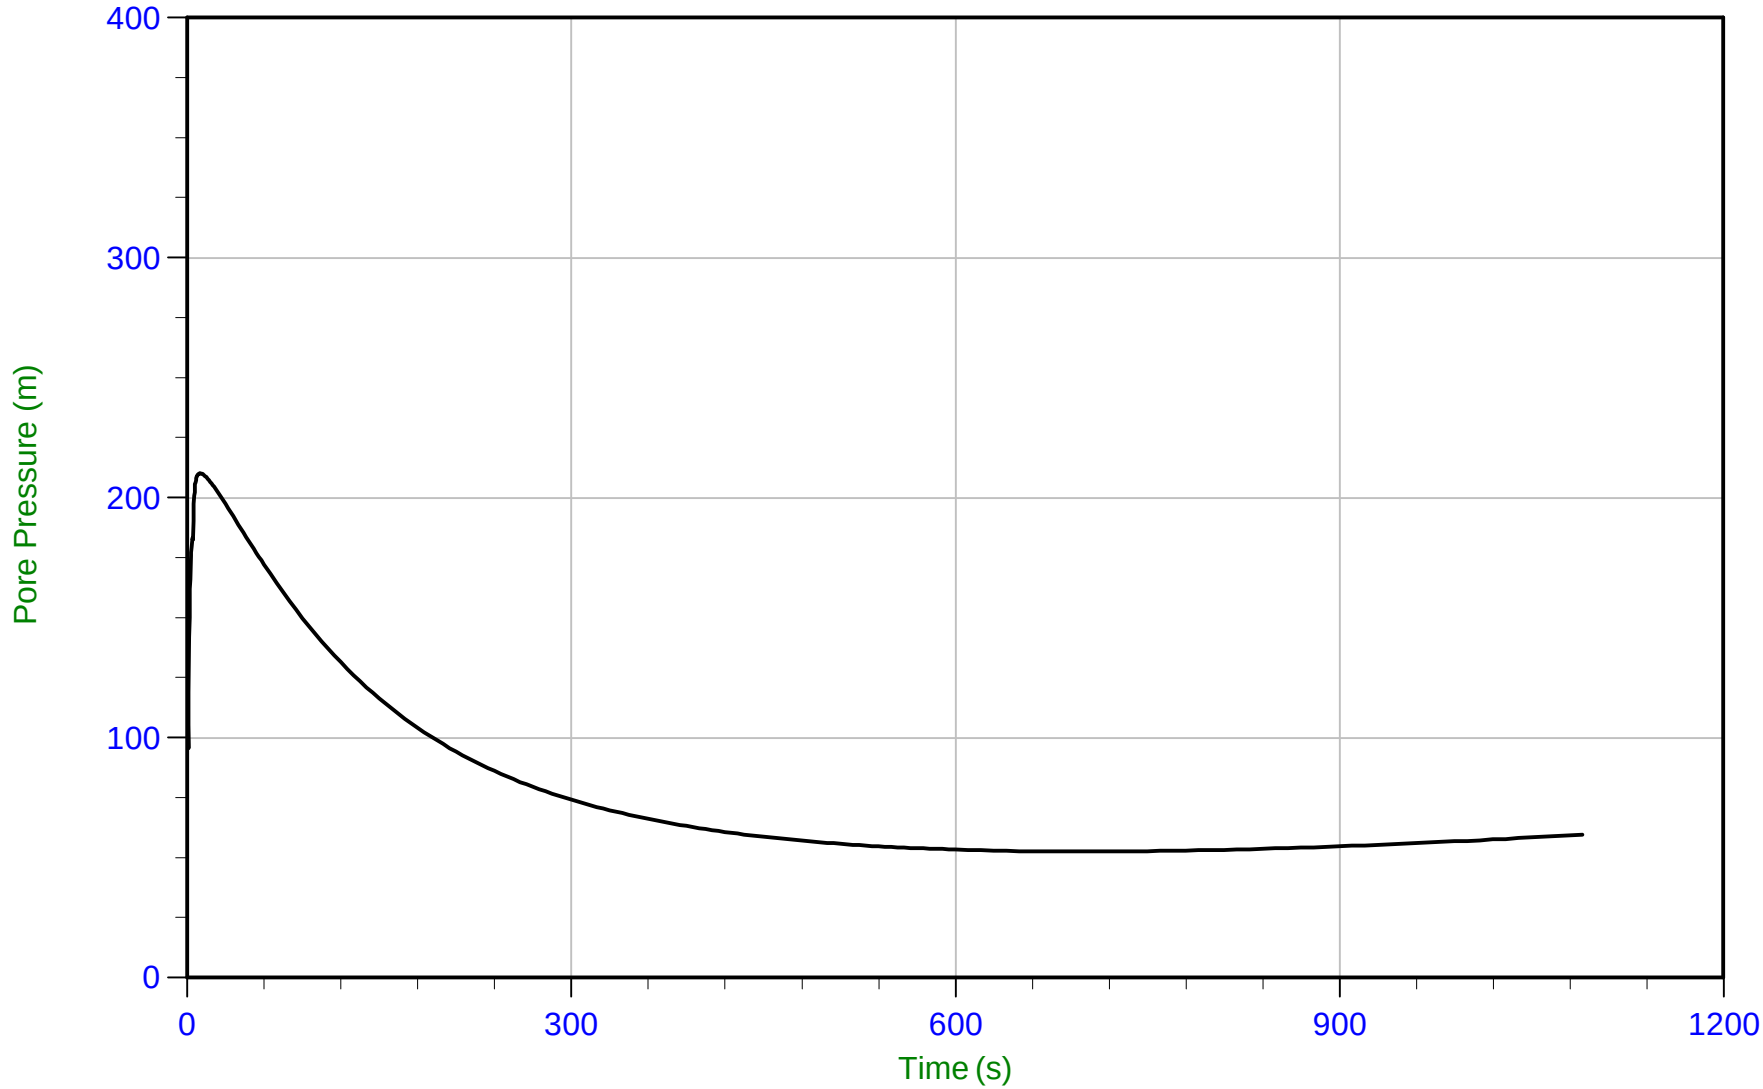

Trace Summary:

Filename: 22-02-23796_RP22-22CPT286.PPF
Depth: 10.775 m / 35.351 ft
Duration: 1090.0 s


u Min: 52.6 m
u Max: 210.2 m
u Final: 59.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 12:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT287
Cone: 854:T1500F15U35 Area=15 cm²

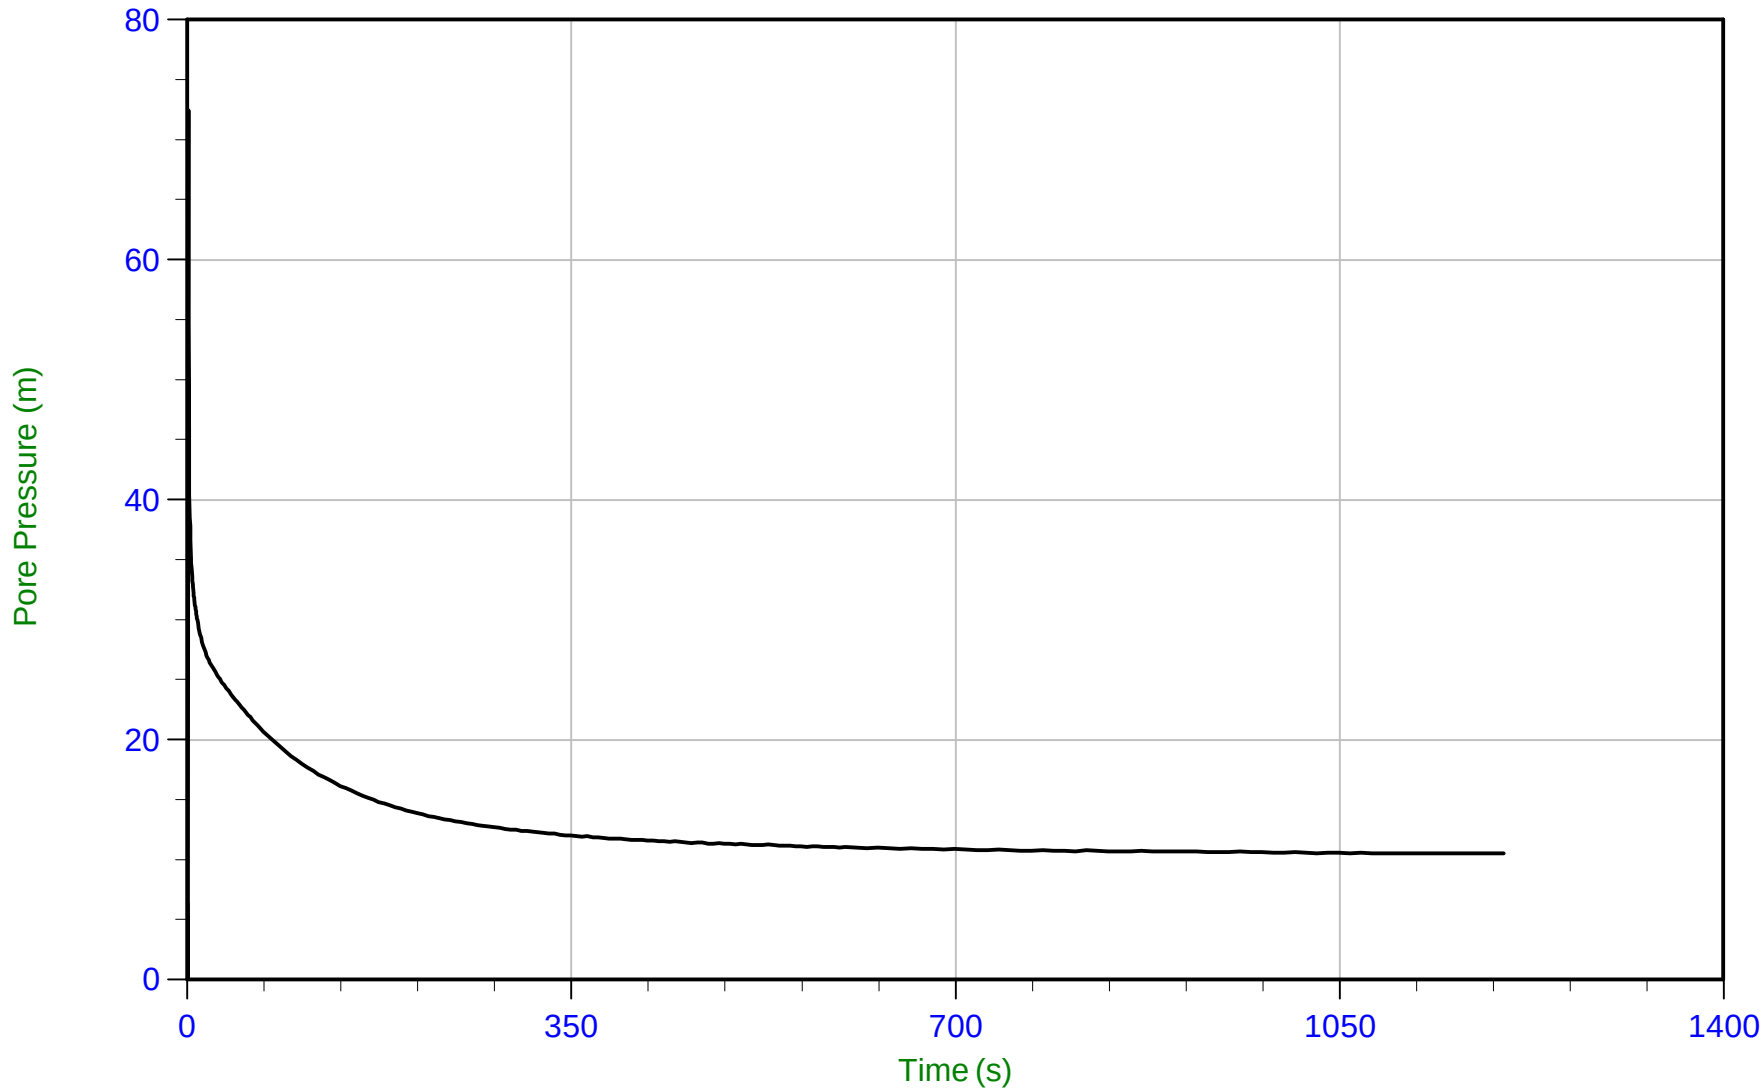

Trace Summary:

Filename: 22-02-23796_RP22_22CPT287.PPF
Depth: 4.800 m / 15.748 ft
Duration: 1200.0 s


u Min: -2.3 m
u Max: 72.4 m
u Final: 10.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/04/2022 14:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT288
Cone: 854:T1500F15U35 Area=15 cm²

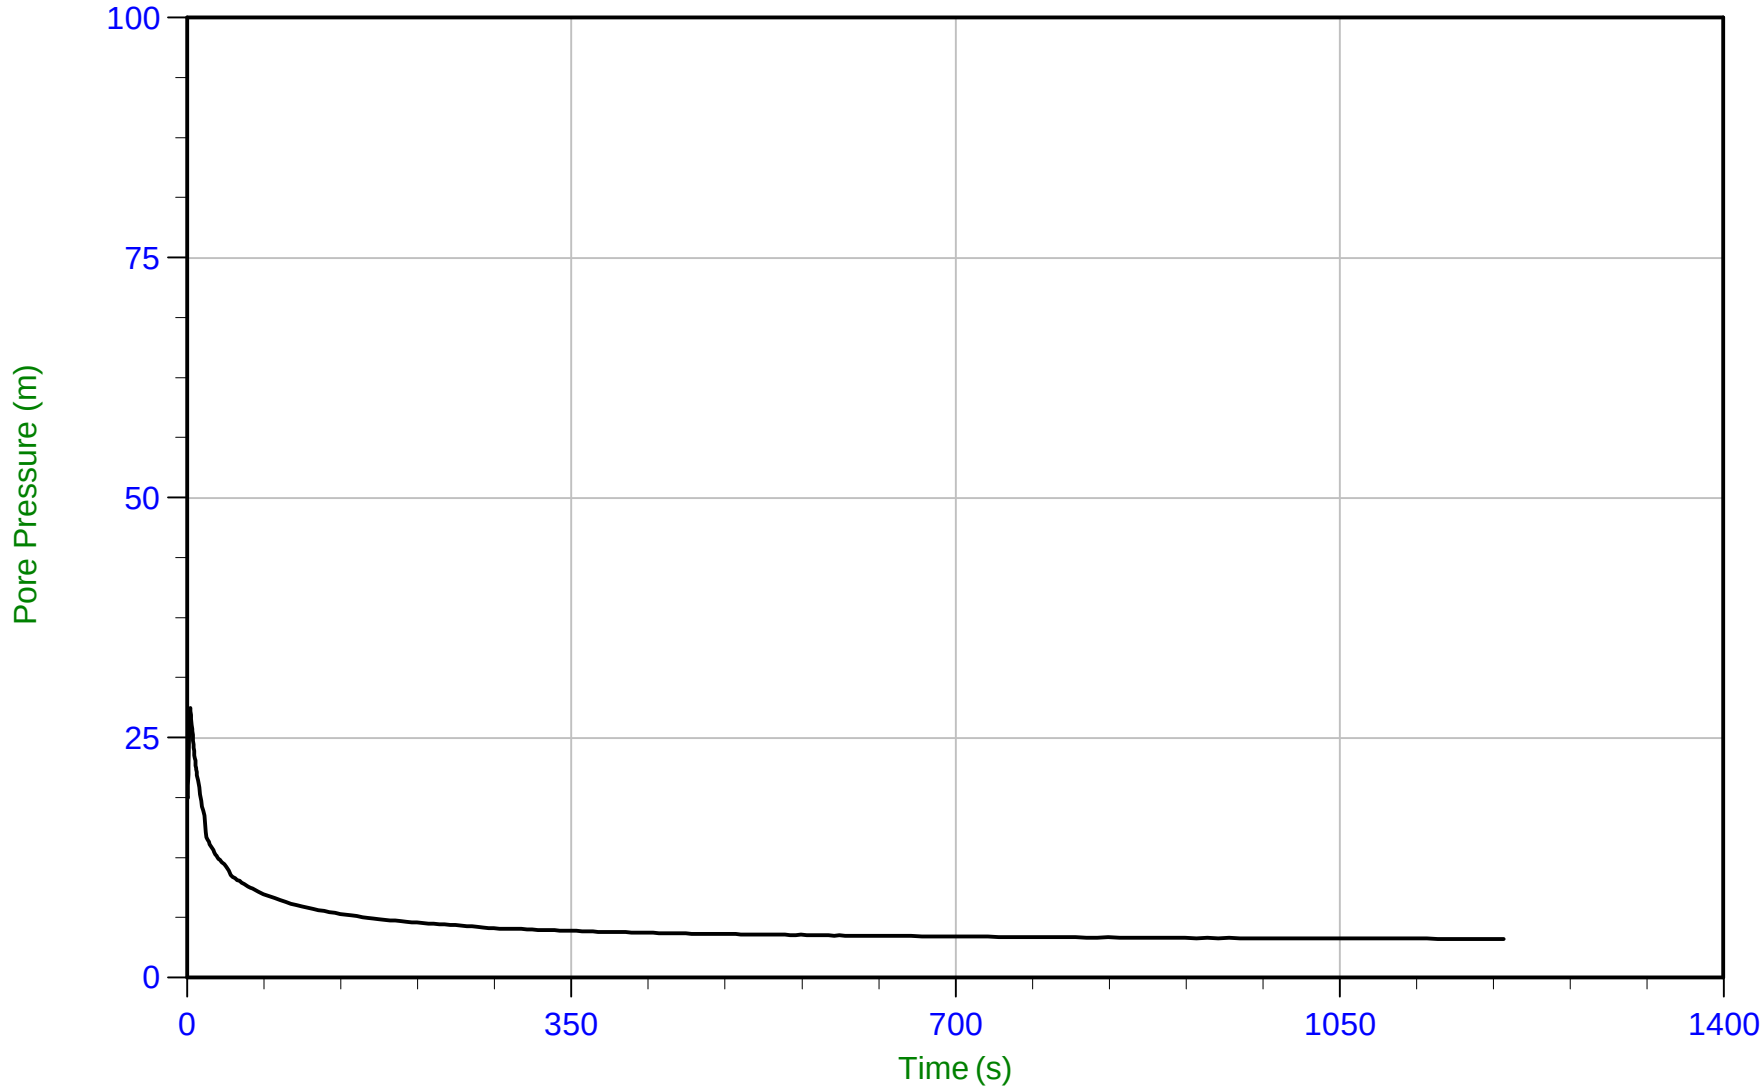

Trace Summary:

Filename: 22-02-23796_RP22-22CPT288.PPF
Depth: 5.900 m / 19.357 ft
Duration: 1200.0 s

u Min: 4.0 m
u Max: 28.1 m
u Final: 4.0 m

WT: 1.900 m / 6.234 ft
Ueq: 4.0 m
U(50): 16.04 m


T(50): 13.5 s
Ir: 100
Ch: 52.0 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/05/2022 08:18
Site: Brooks, Alberta

Sounding: RCPT22-22CPT300
Cone: 854:T1500F15U35 Area=15 cm²

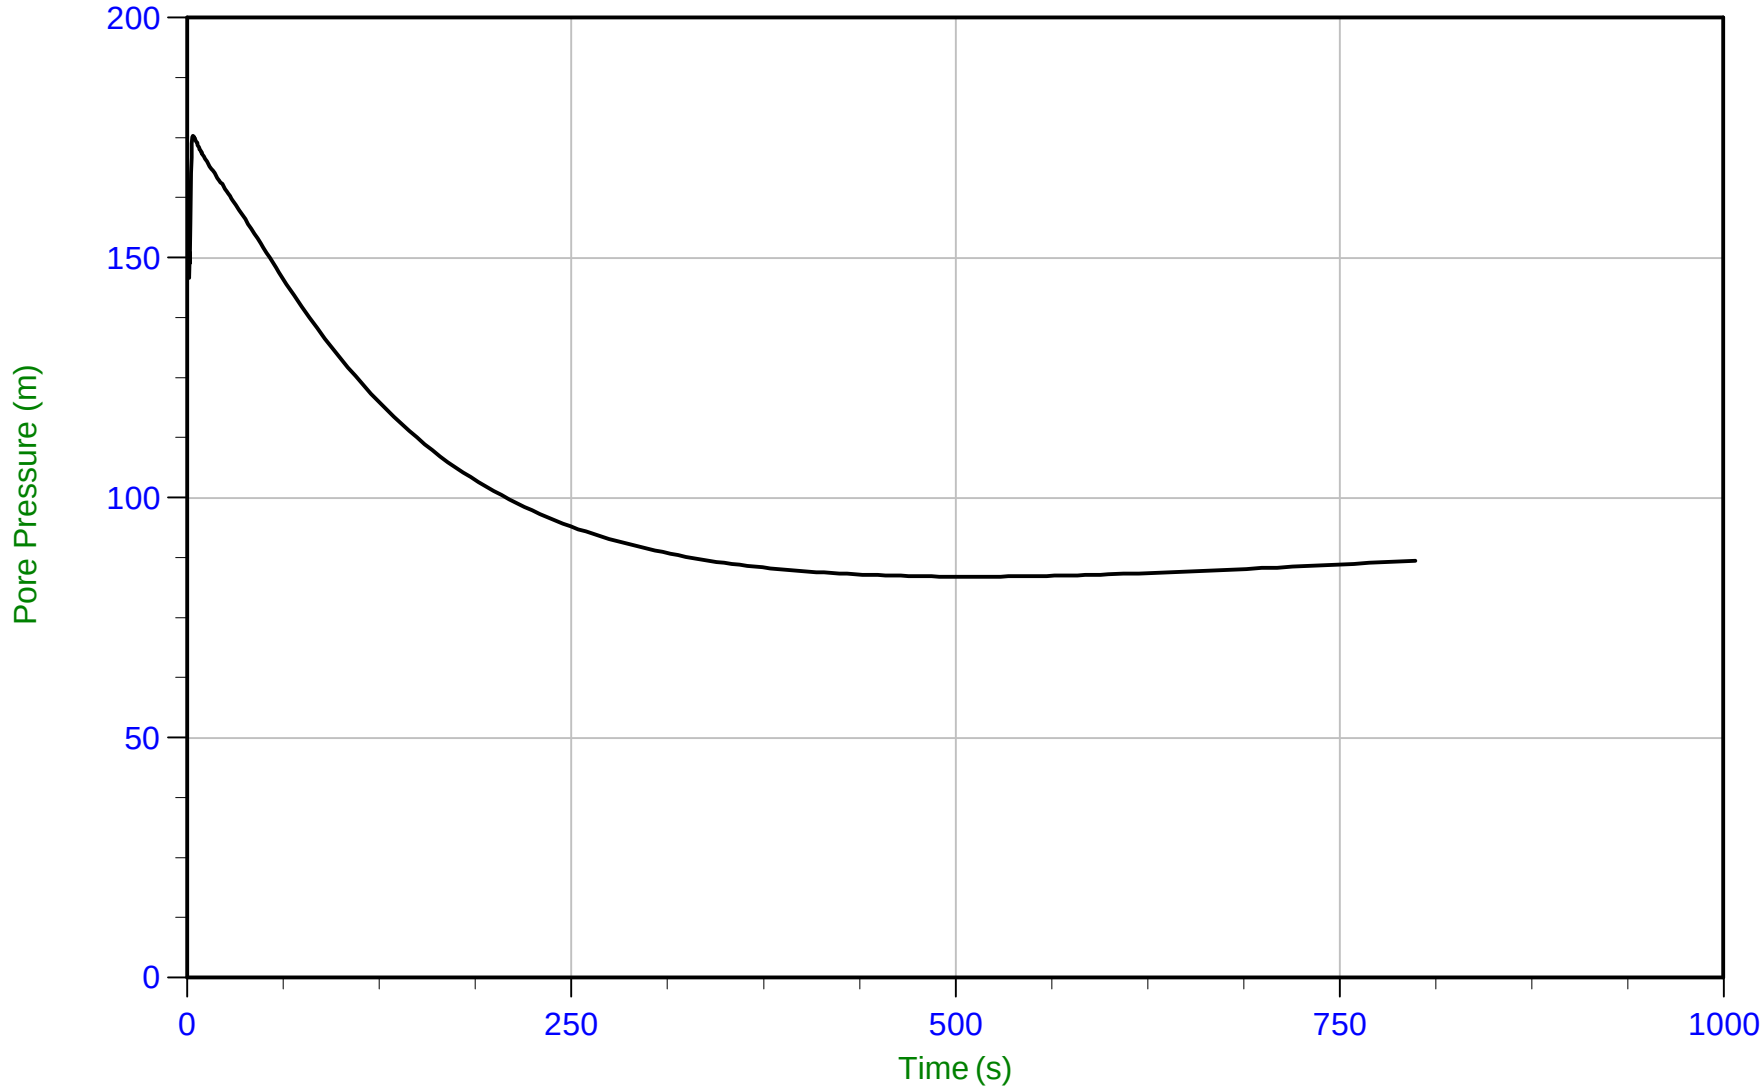

Trace Summary:

Filename: 22-02-23796_RP22-22CPT300.PPF
Depth: 7.825 m / 25.672 ft
Duration: 800.0 s


u Min: 83.5 m
u Max: 175.3 m
u Final: 86.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/05/2022 10:25
Site: Brooks, Alberta

Sounding: RCPT22-22CPT301B
Cone: 854:T1500F15U35 Area=15 cm²

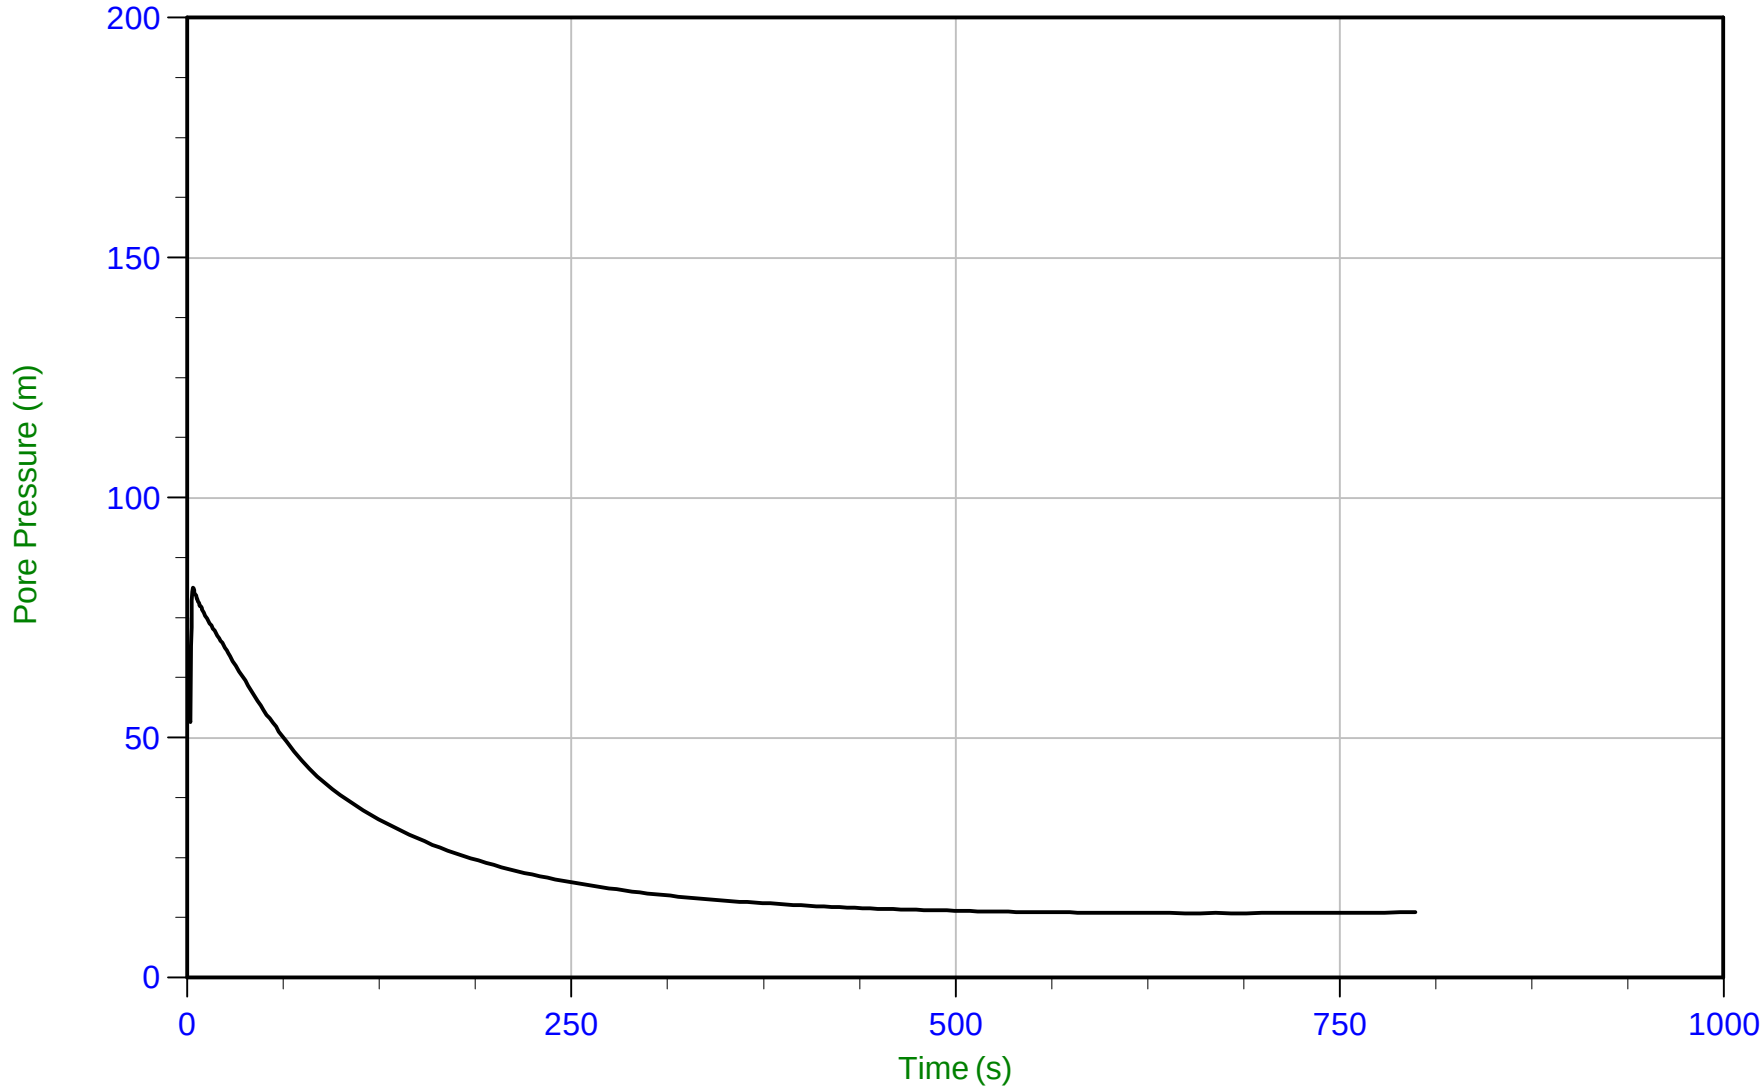

Trace Summary:

Filename: 22-02-23796_RP22-22CPT301B.PPF
Depth: 8.500 m / 27.887 ft
Duration: 800.0 s


u Min: 13.4 m
u Max: 81.3 m
u Final: 13.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/05/2022 11:25
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT302
Cone: 854:T1500F15U35 Area=15 cm²

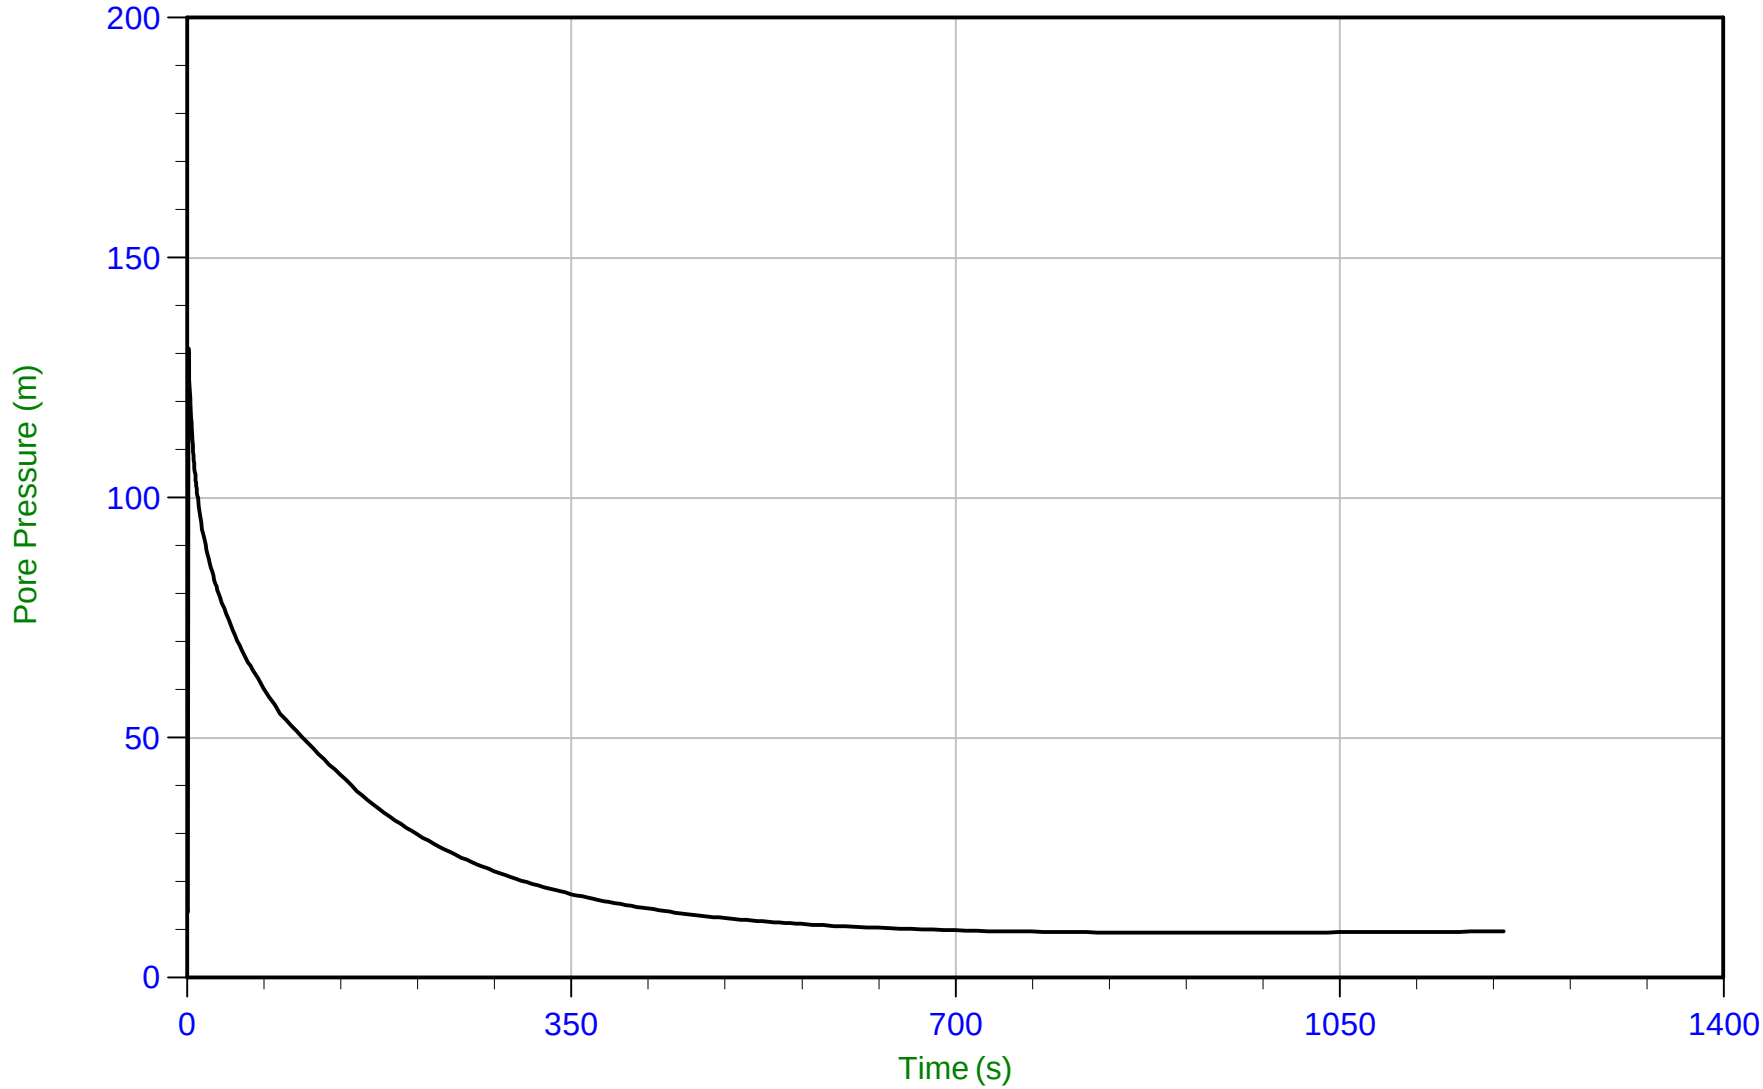

Trace Summary:

Filename: 22-02-23796_RS22-22CPT302.PPF
Depth: 5.900 m / 19.357 ft
Duration: 1200.0 s


u Min: 9.4 m
u Max: 131.2 m
u Final: 9.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/05/2022 11:25
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT302
Cone: 854:T1500F15U35 Area=15 cm²

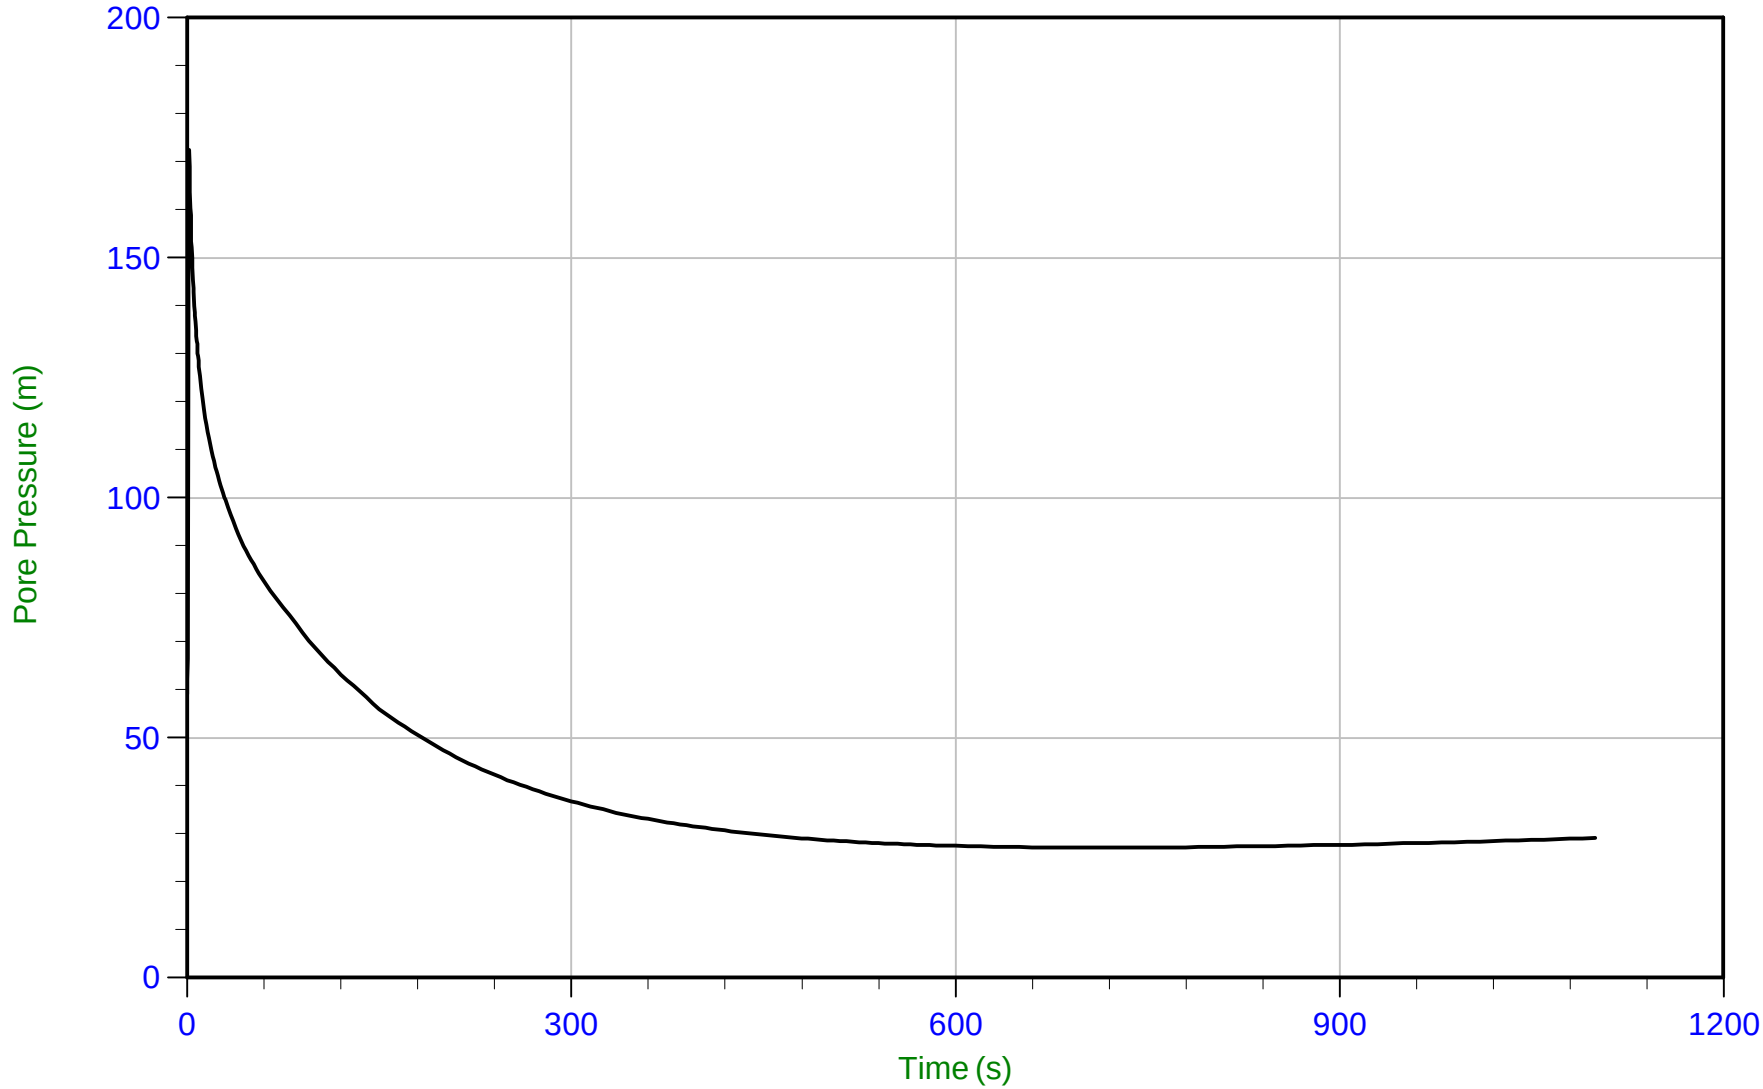

Trace Summary:

Filename: 22-02-23796_RS22-22CPT302.PPF
Depth: 8.900 m / 29.199 ft
Duration: 1100.0 s


u Min: 27.1 m
u Max: 172.5 m
u Final: 29.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/05/2022 11:25
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT302
Cone: 854:T1500F15U35 Area=15 cm²

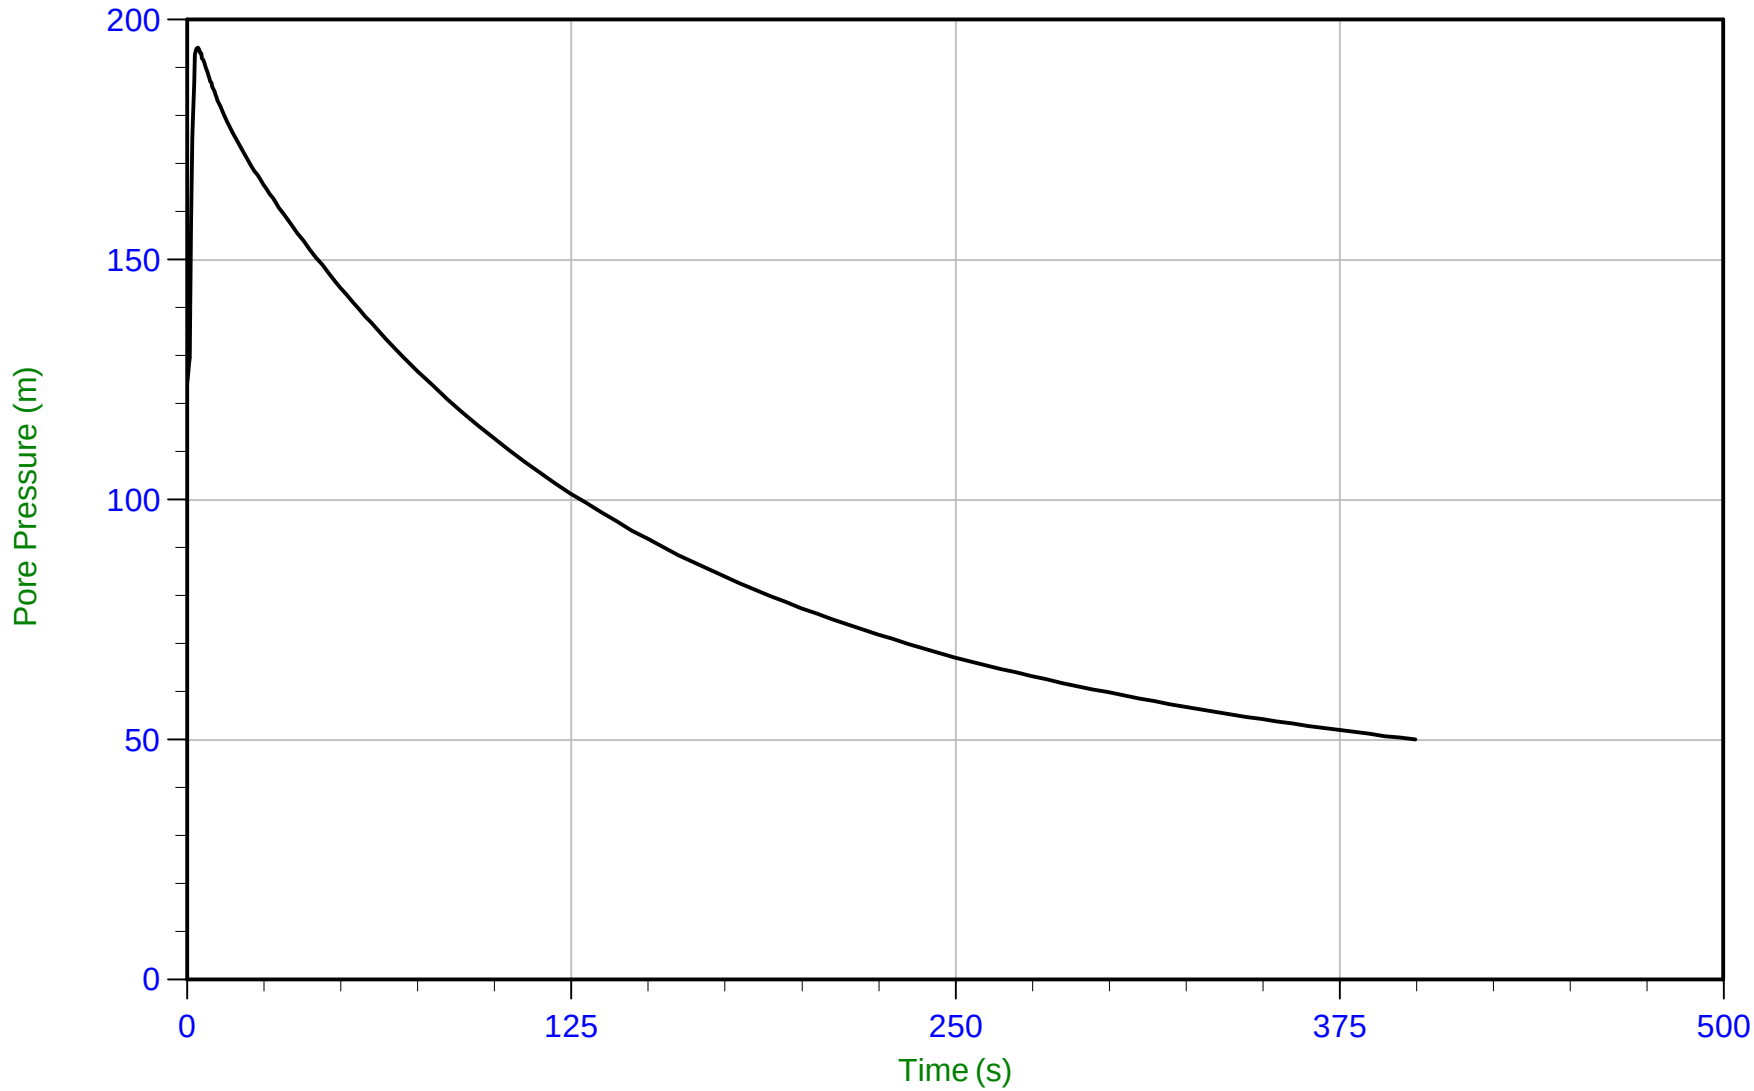

Trace Summary:

Filename: 22-02-23796_RS22-22CPT302.PPF
Depth: 12.075 m / 39.616 ft
Duration: 400.0 s


u Min: 50.0 m
u Max: 194.2 m
u Final: 50.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/05/2022 13:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT303
Cone: 854:T1500F15U35 Area=15 cm²

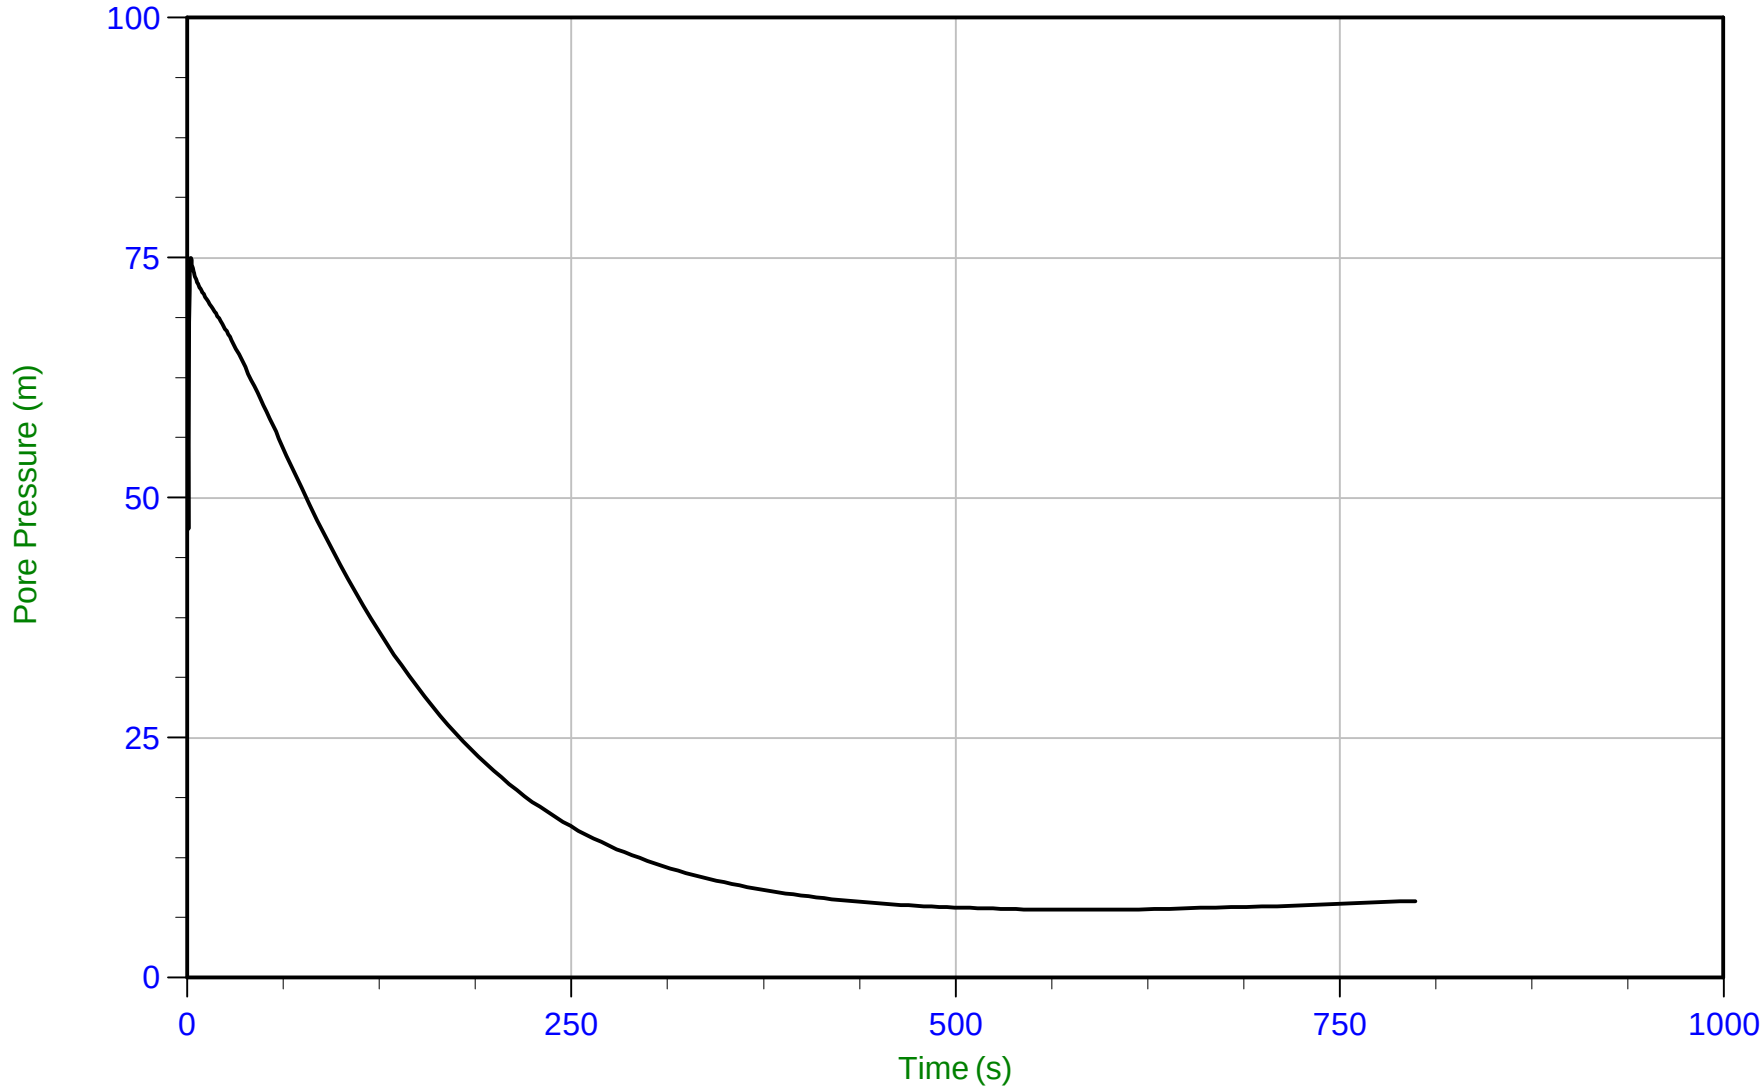

Trace Summary:

Filename: 22-02-23796_RP22-22CPT303.PPF
Depth: 7.775 m / 25.508 ft
Duration: 800.0 s


u Min: 7.1 m
u Max: 75.0 m
u Final: 8.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/05/2022 14:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT304
Cone: 854:T1500F15U35 Area=15 cm²

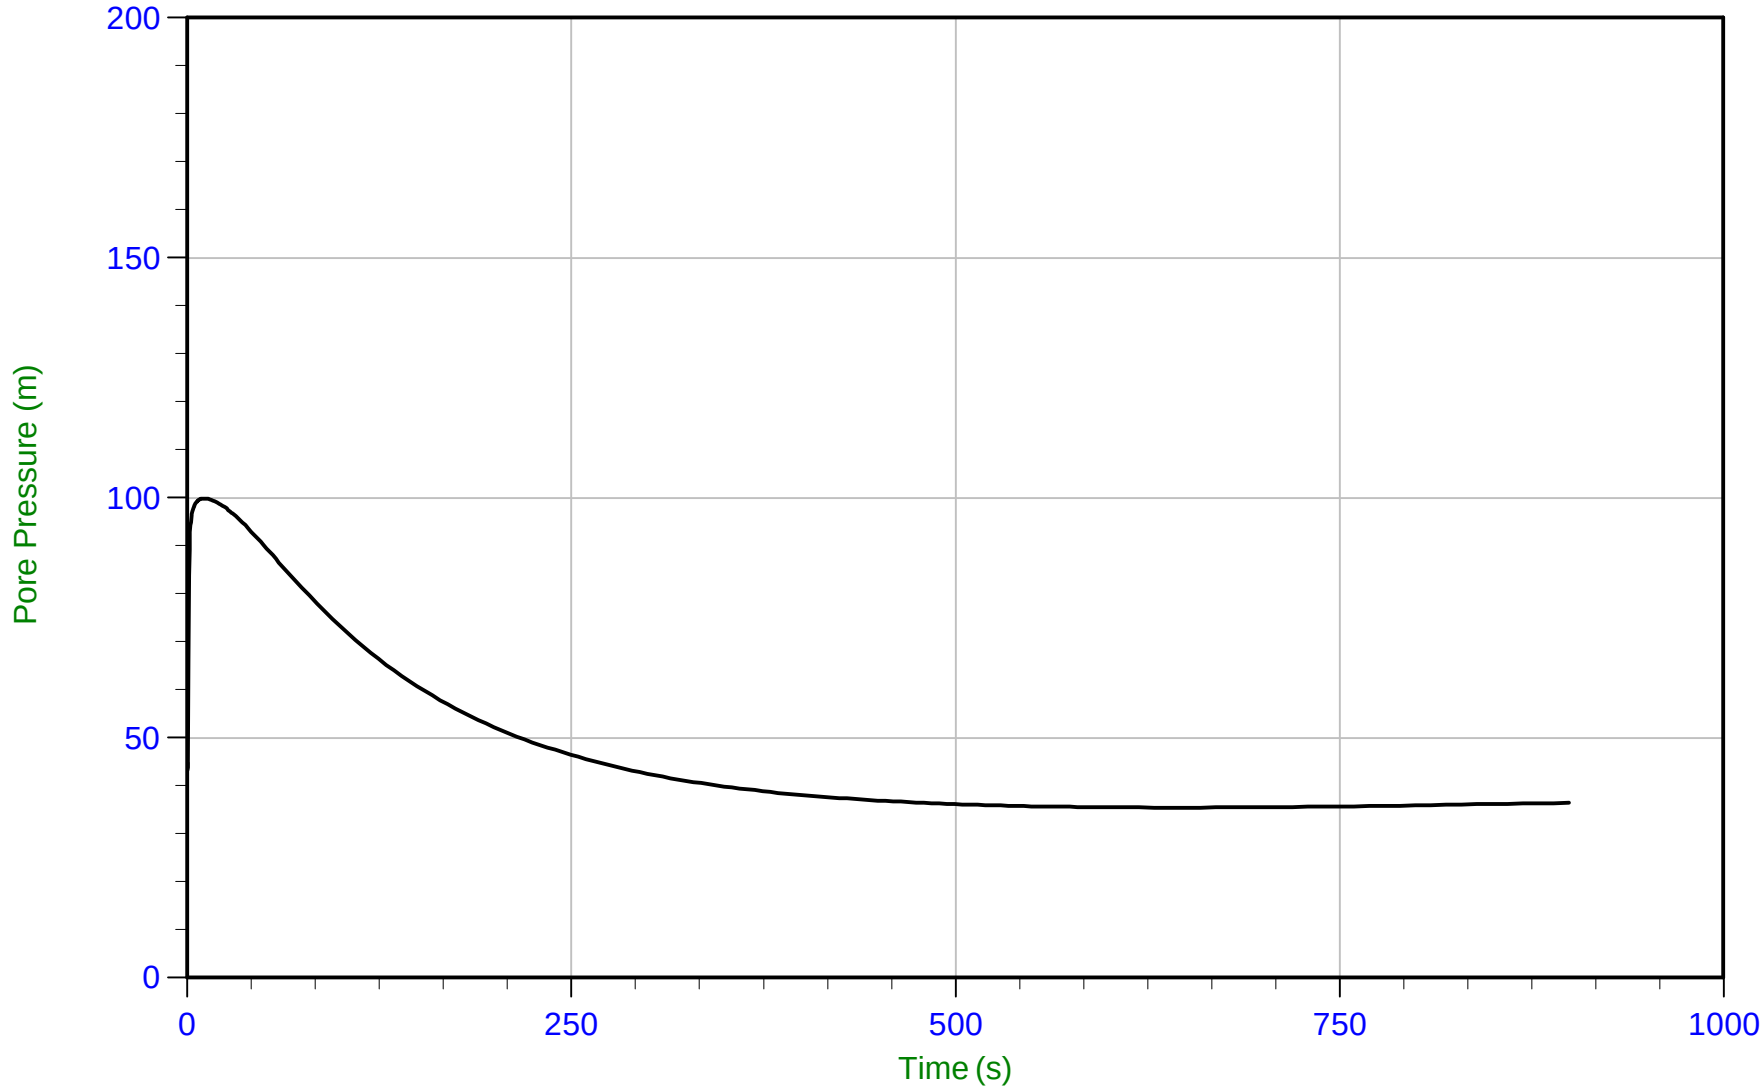

Trace Summary:

Filename: 22-02-23796_RP22-22CPT304.PPF
Depth: 5.875 m / 19.275 ft
Duration: 900.0 s


u Min: 35.4 m
u Max: 99.8 m
u Final: 36.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/05/2022 16:19
Site: Brooks, Alberta

Sounding: RCPT22-22CPT305
Cone: 854:T1500F15U35 Area=15 cm²

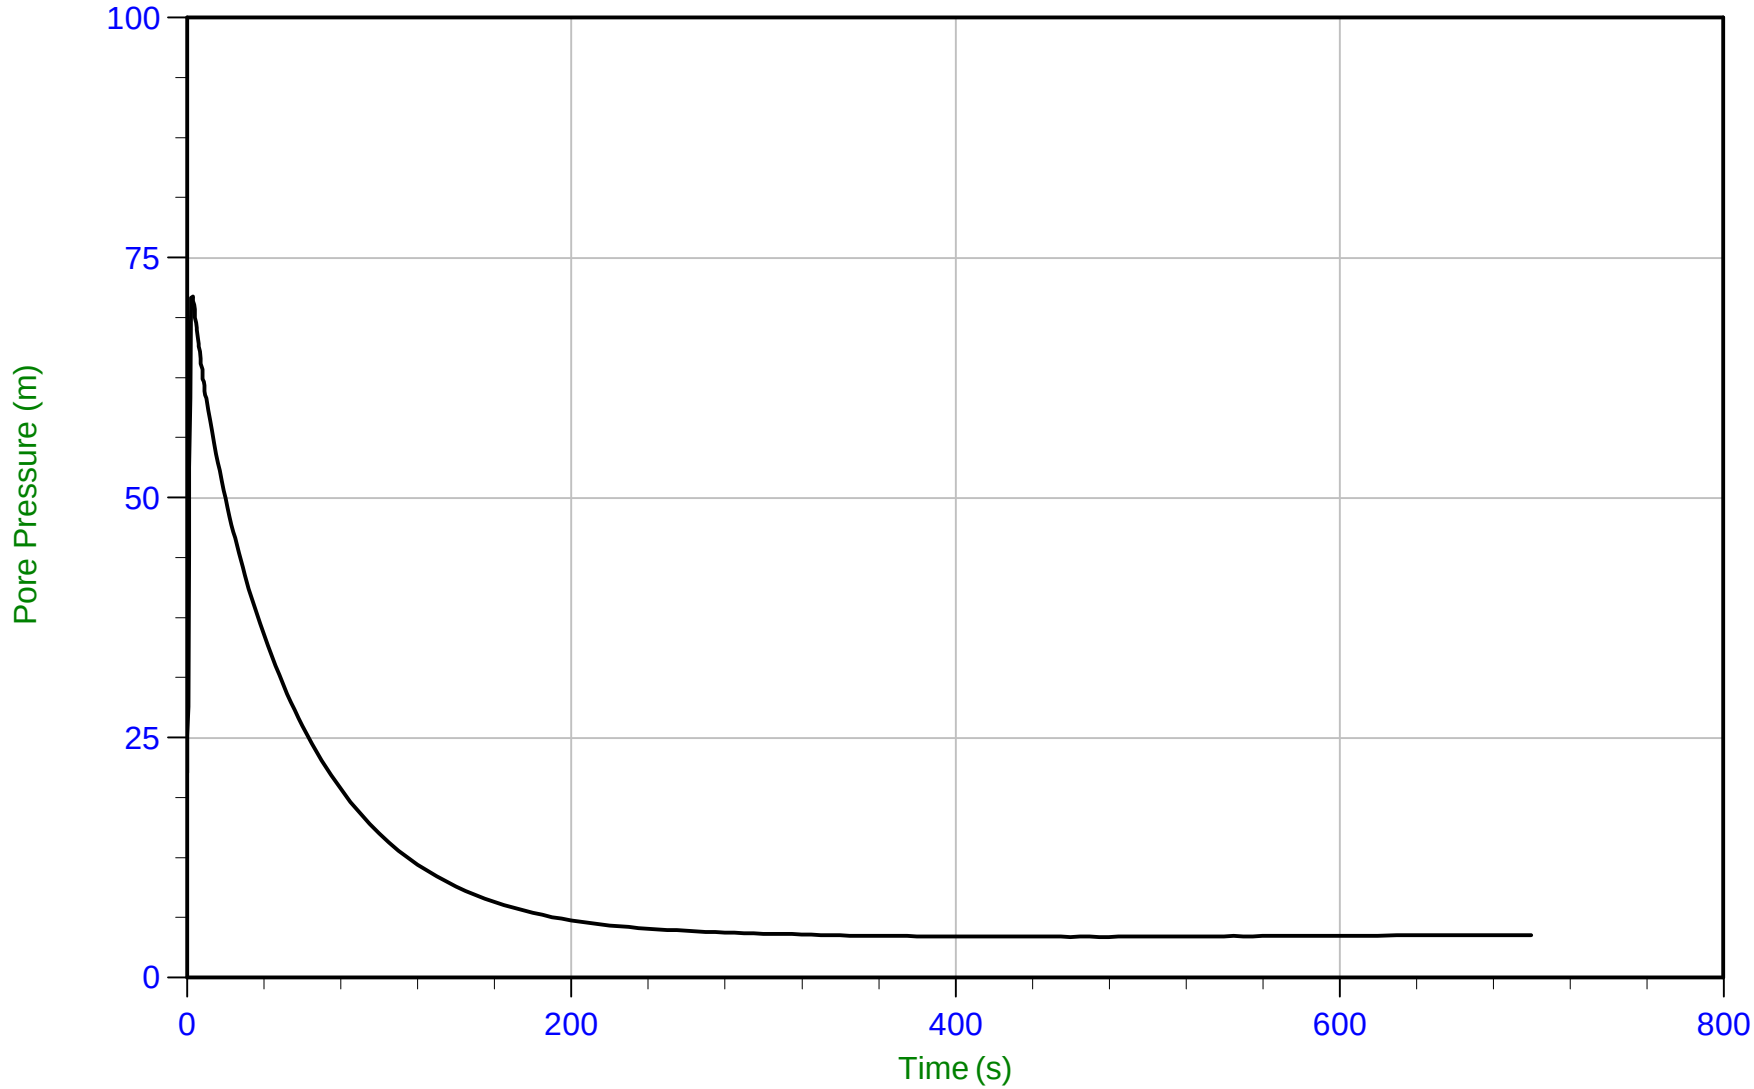

Trace Summary:

Filename: 22-02-23796_RP22-22CPT305.PPF
Depth: 8.850 m / 29.035 ft
Duration: 700.0 s

u Min: 4.3 m
u Max: 71.0 m
u Final: 4.4 m

WT: 4.450 m / 14.600 ft
Ueq: 4.4 m
U(50): 37.68 m


T(50): 33.6 s
Ir: 100
Ch: 20.9 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/06/2022 06:59
Site: Brooks, Alberta

Sounding: RCPT22-22CPT306
Cone: 854:T1500F15U35 Area=15 cm²

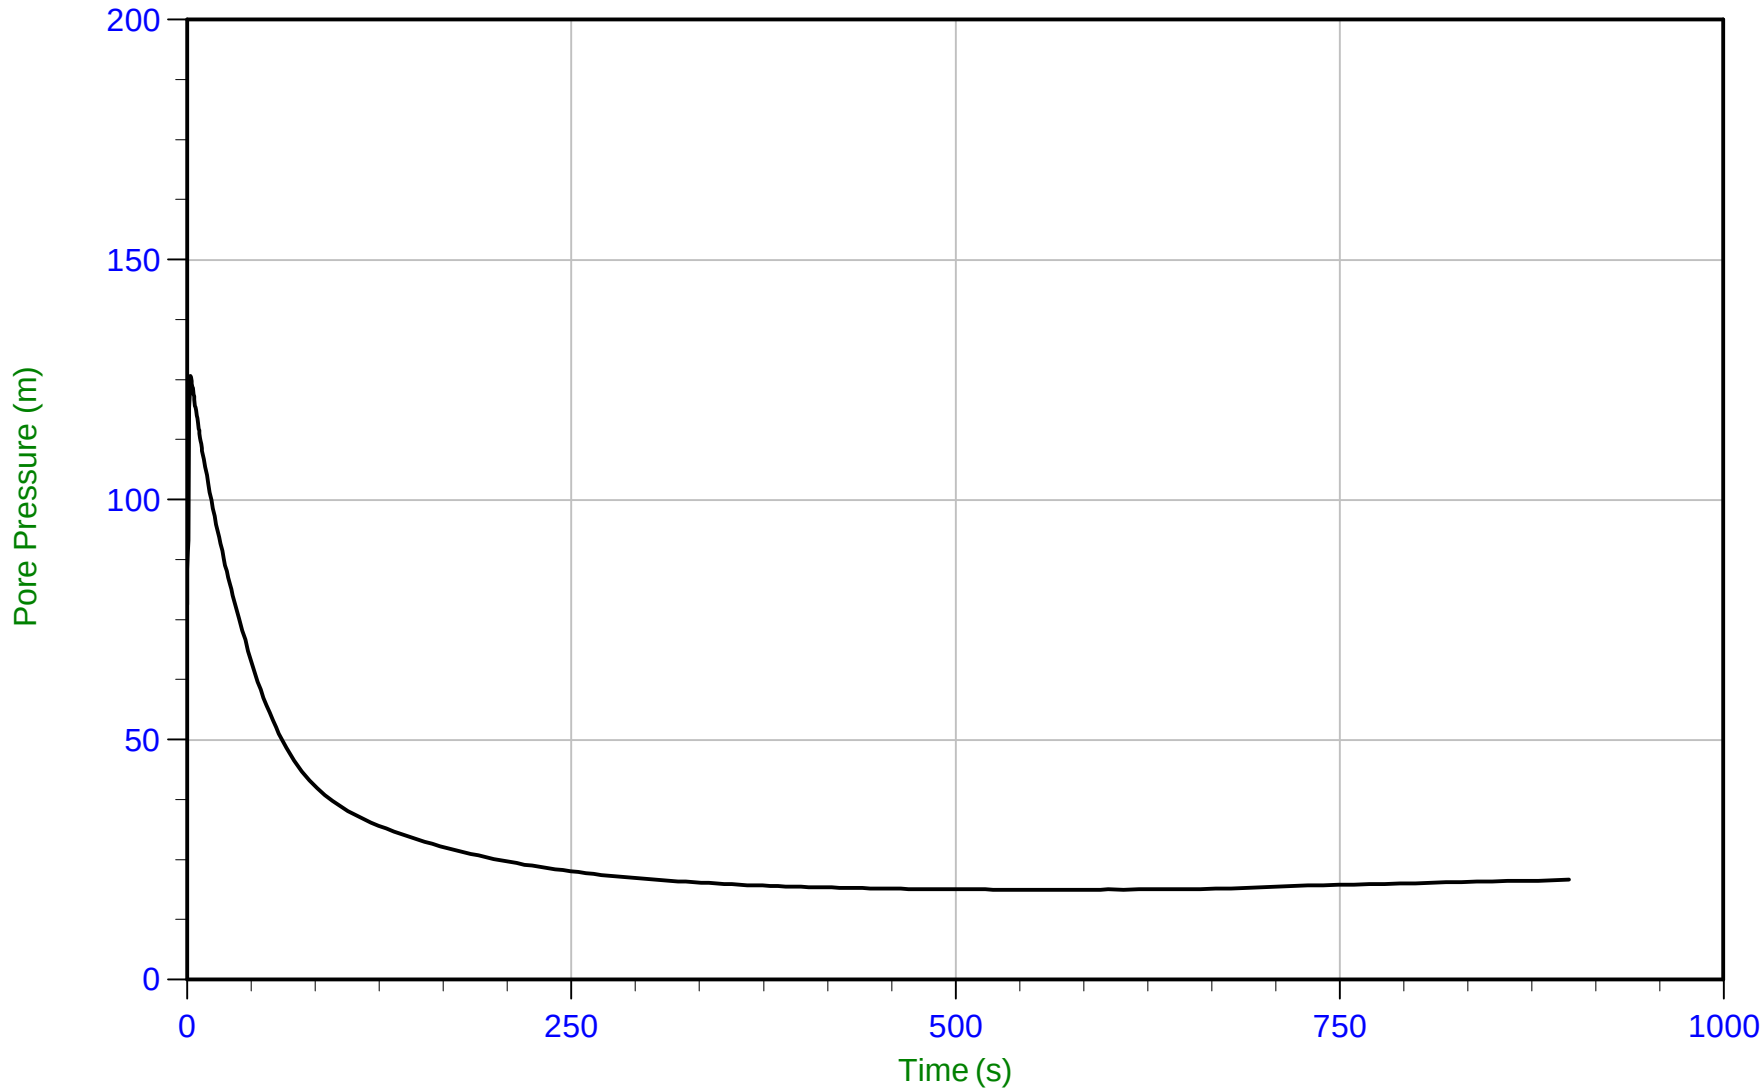

Trace Summary:

Filename: 22-02-23796_RP22-22CPT306.PPF
Depth: 5.800 m / 19.029 ft
Duration: 900.0 s


u Min: 18.8 m
u Max: 125.8 m
u Final: 20.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/06/2022 10:11
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT308
Cone: 854:T1500F15U35 Area=15 cm²

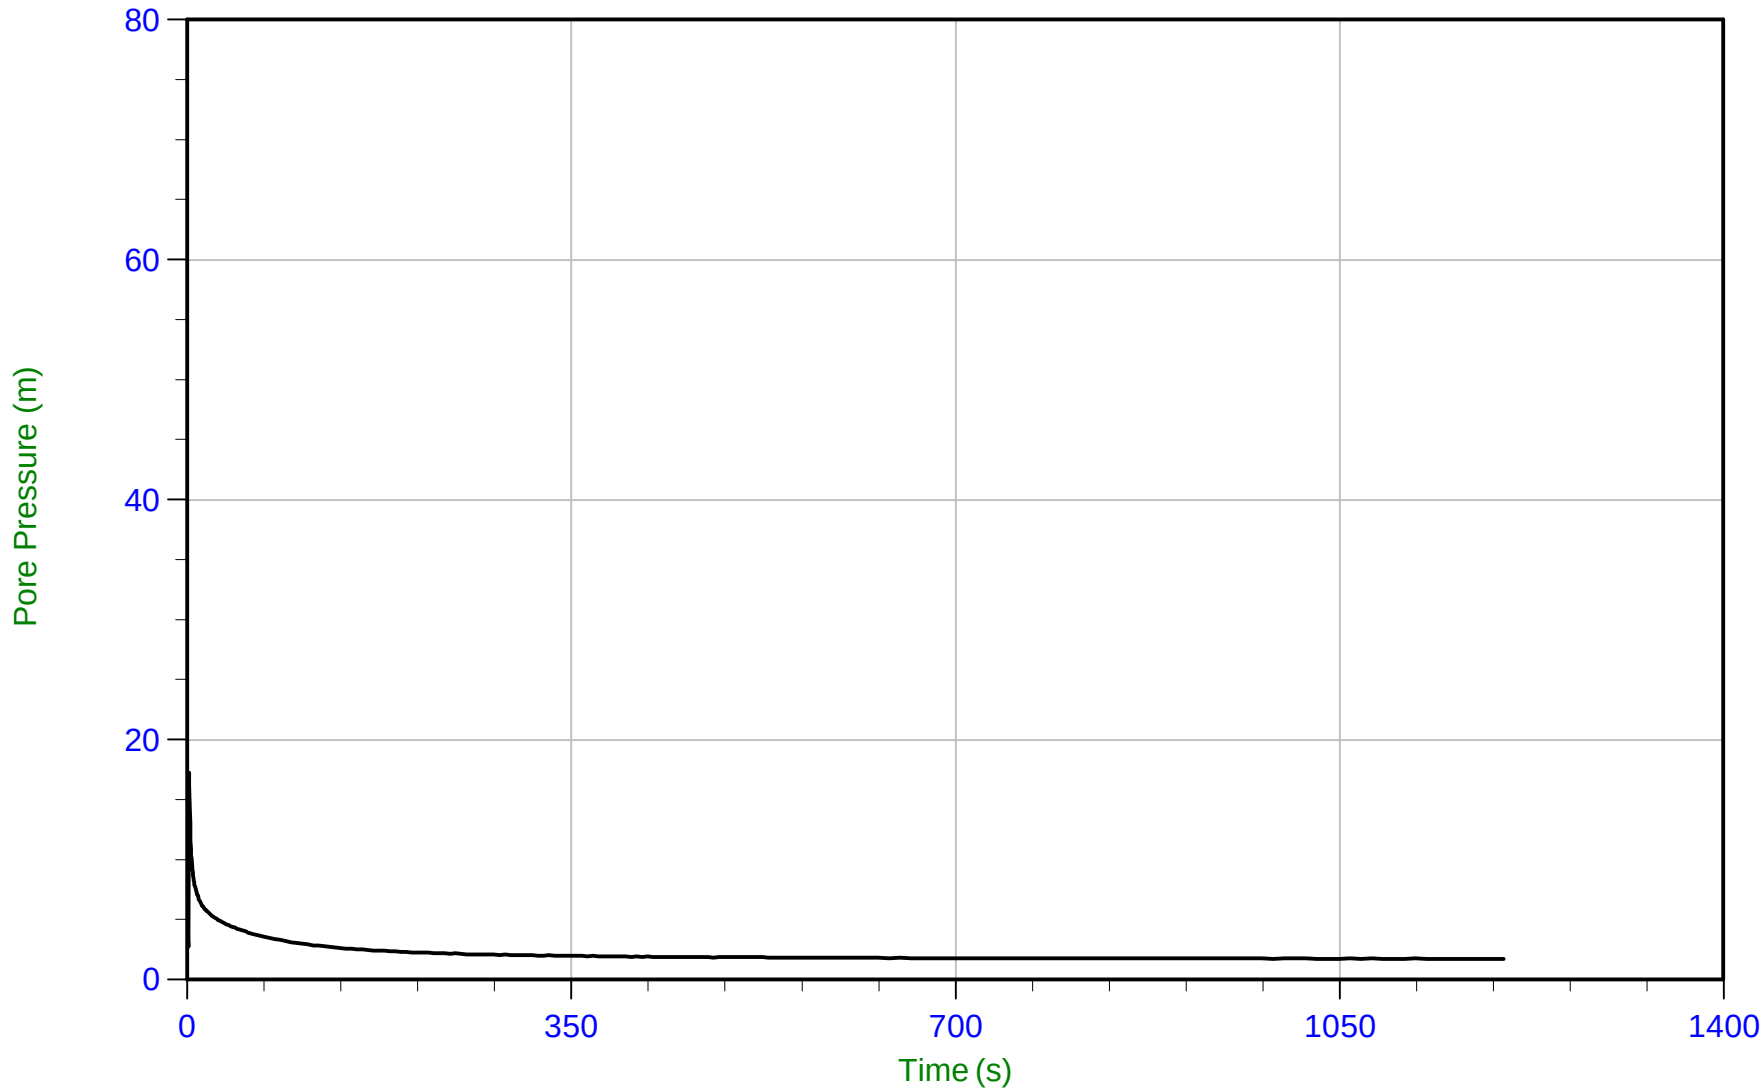

Trace Summary:

Filename: 22-02-23796_RS22-22CPT308.PPF
Depth: 4.750 m / 15.584 ft
Duration: 1200.0 s

u Min: 1.7 m
u Max: 17.3 m
u Final: 1.7 m

WT: 3.050 m / 10.006 ft
Ueq: 1.7 m
U(50): 9.48 m


T(50): 2.6 s
Ir: 100
Ch: 265.7 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/06/2022 10:11
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT308
Cone: 854:T1500F15U35 Area=15 cm²

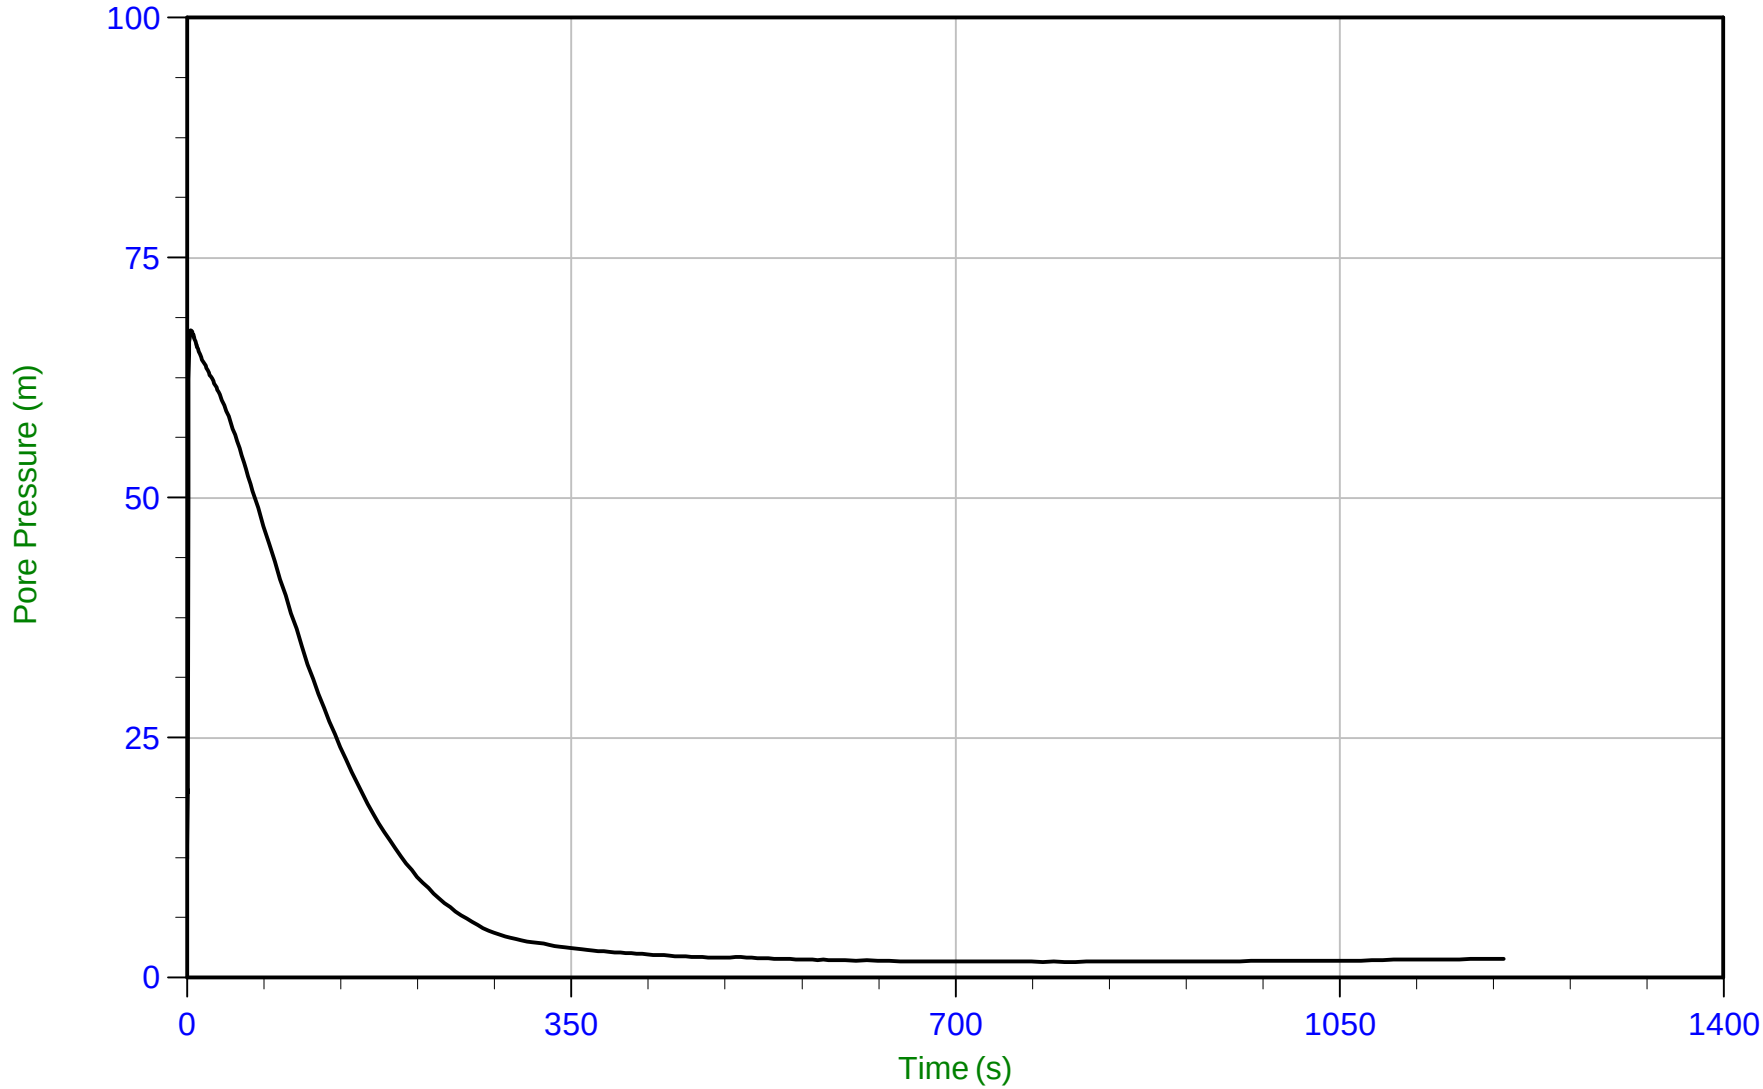

Trace Summary:

Filename: 22-02-23796_RS22-22CPT308.PPF
Depth: 6.750 m / 22.145 ft
Duration: 1200.0 s


u Min: 1.7 m
u Max: 67.5 m
u Final: 2.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/06/2022 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT309
Cone: 854:T1500F15U35 Area=15 cm²

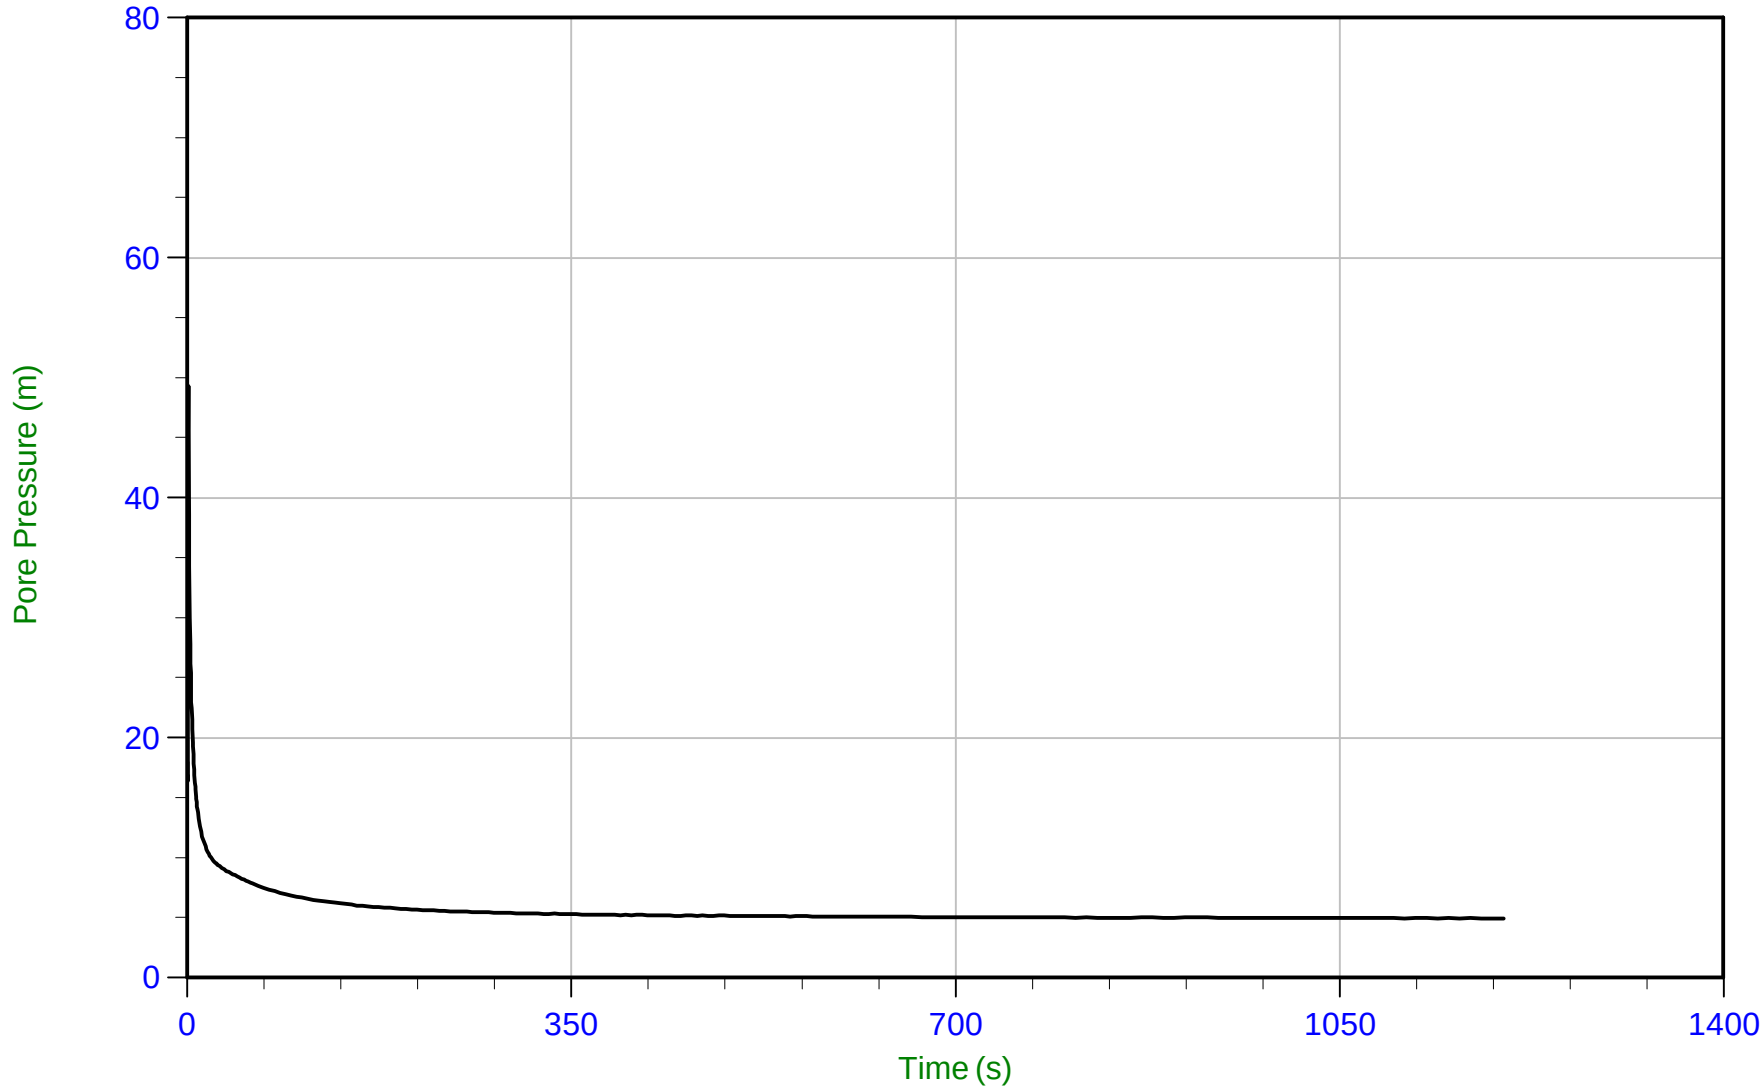

Trace Summary:

Filename: 22-02-23796_RP22-22CPT309.PPF
Depth: 4.800 m / 15.748 ft
Duration: 1200.0 s


u Min: 4.9 m
u Max: 49.3 m
u Final: 4.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/06/2022 13:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT310
Cone: 854:T1500F15U35 Area=15 cm²

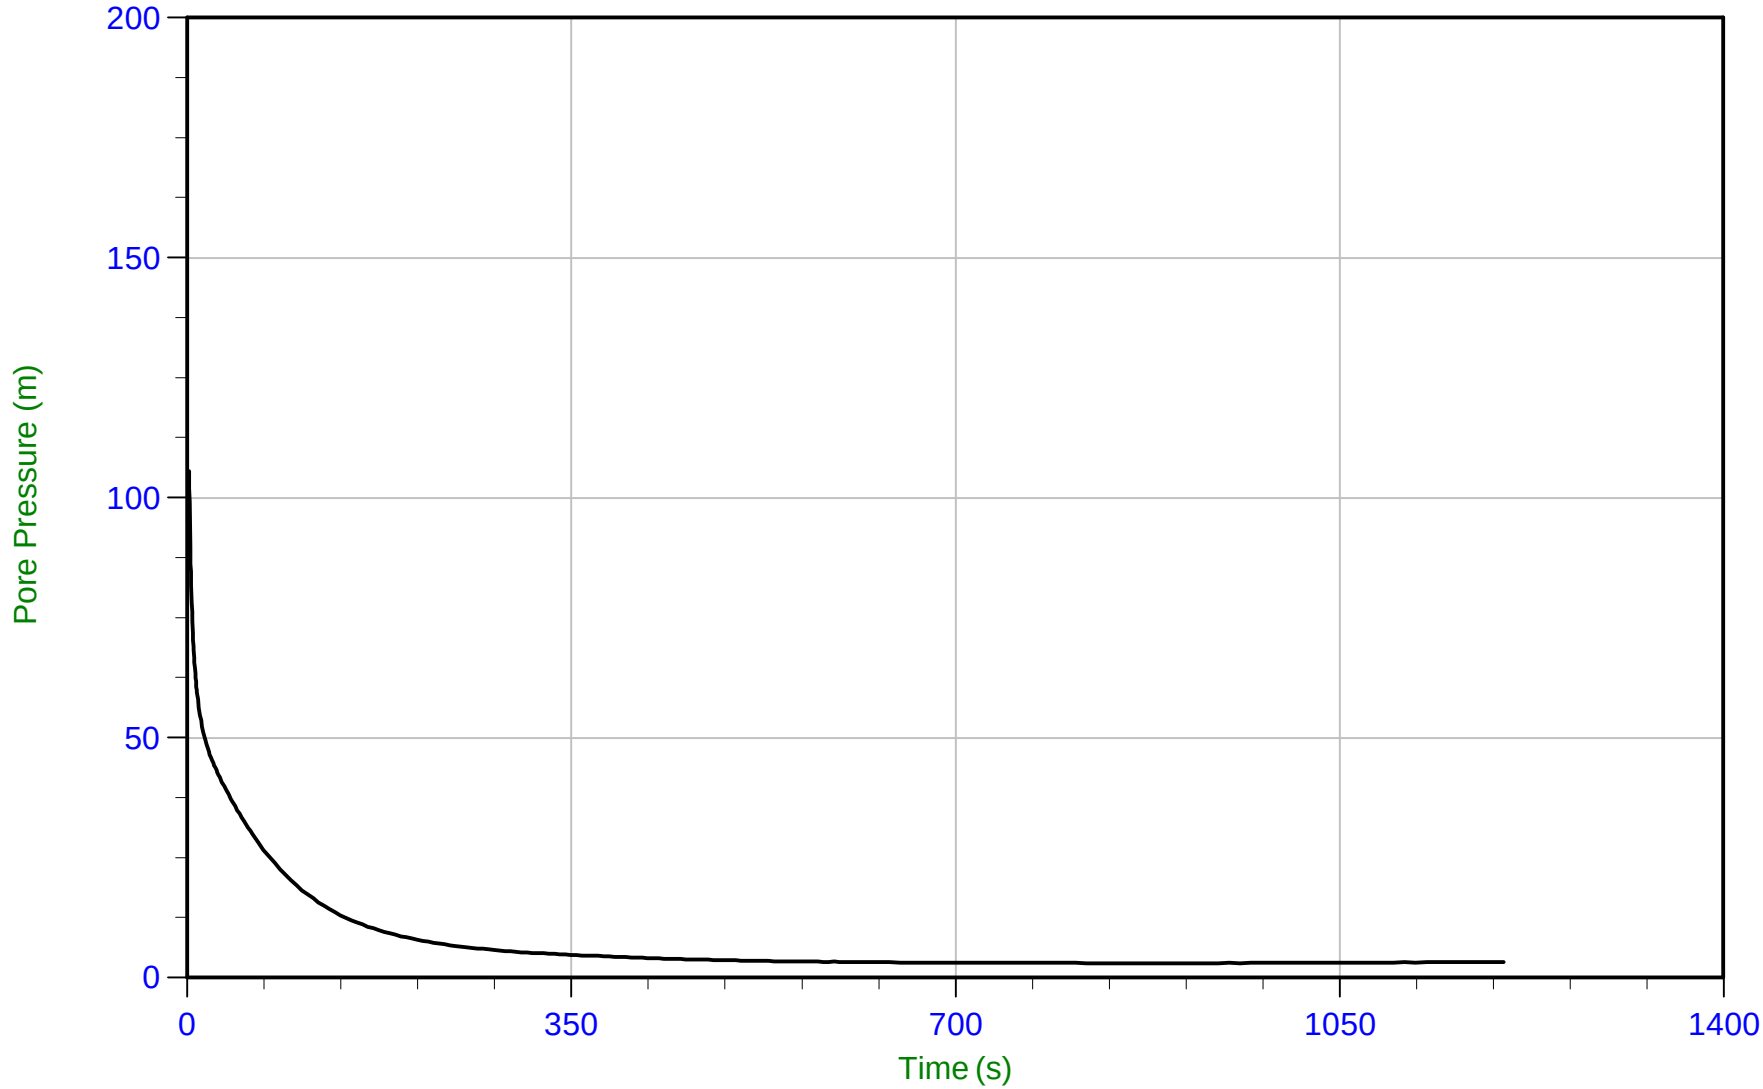

Trace Summary:

Filename: 22-02-23796_RP22-22CPT310.PPF
Depth: 6.875 m / 22.556 ft
Duration: 1200.0 s

u Min: 3.0 m
u Max: 105.5 m
u Final: 3.3 m


WT: 3.575 m / 11.729 ft
Ueq: 3.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/06/2022 15:56
Site: Brooks, Alberta

Sounding: RCPT22-22CPT311
Cone: 854:T1500F15U35 Area=15 cm²

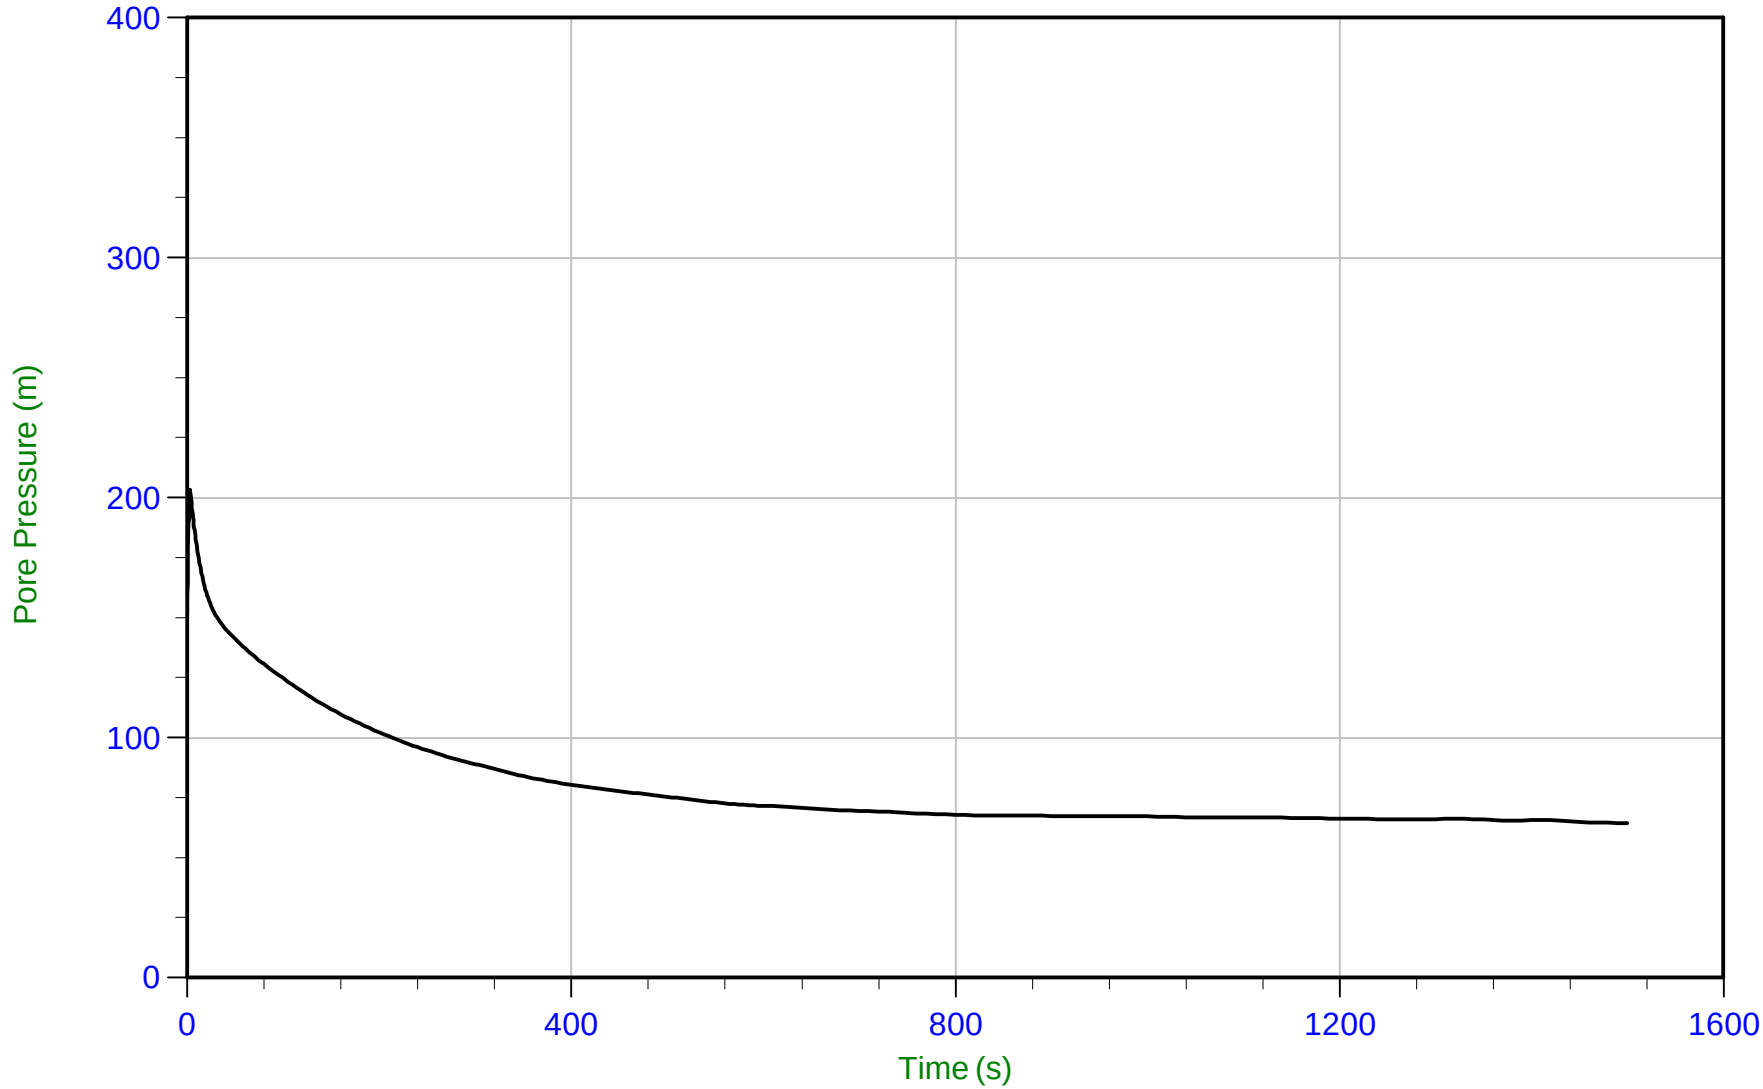

Trace Summary:

Filename: 22-02-23796_RP22-22CPT311.PPF
Depth: 6.850 m / 22.473 ft
Duration: 1500.0 s


u Min: 64.4 m
u Max: 203.4 m
u Final: 64.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/06/2022 17:01
Site: Brooks, Alberta

Sounding: RCPT22-22CPT312
Cone: 854:T1500F15U35 Area=15 cm²

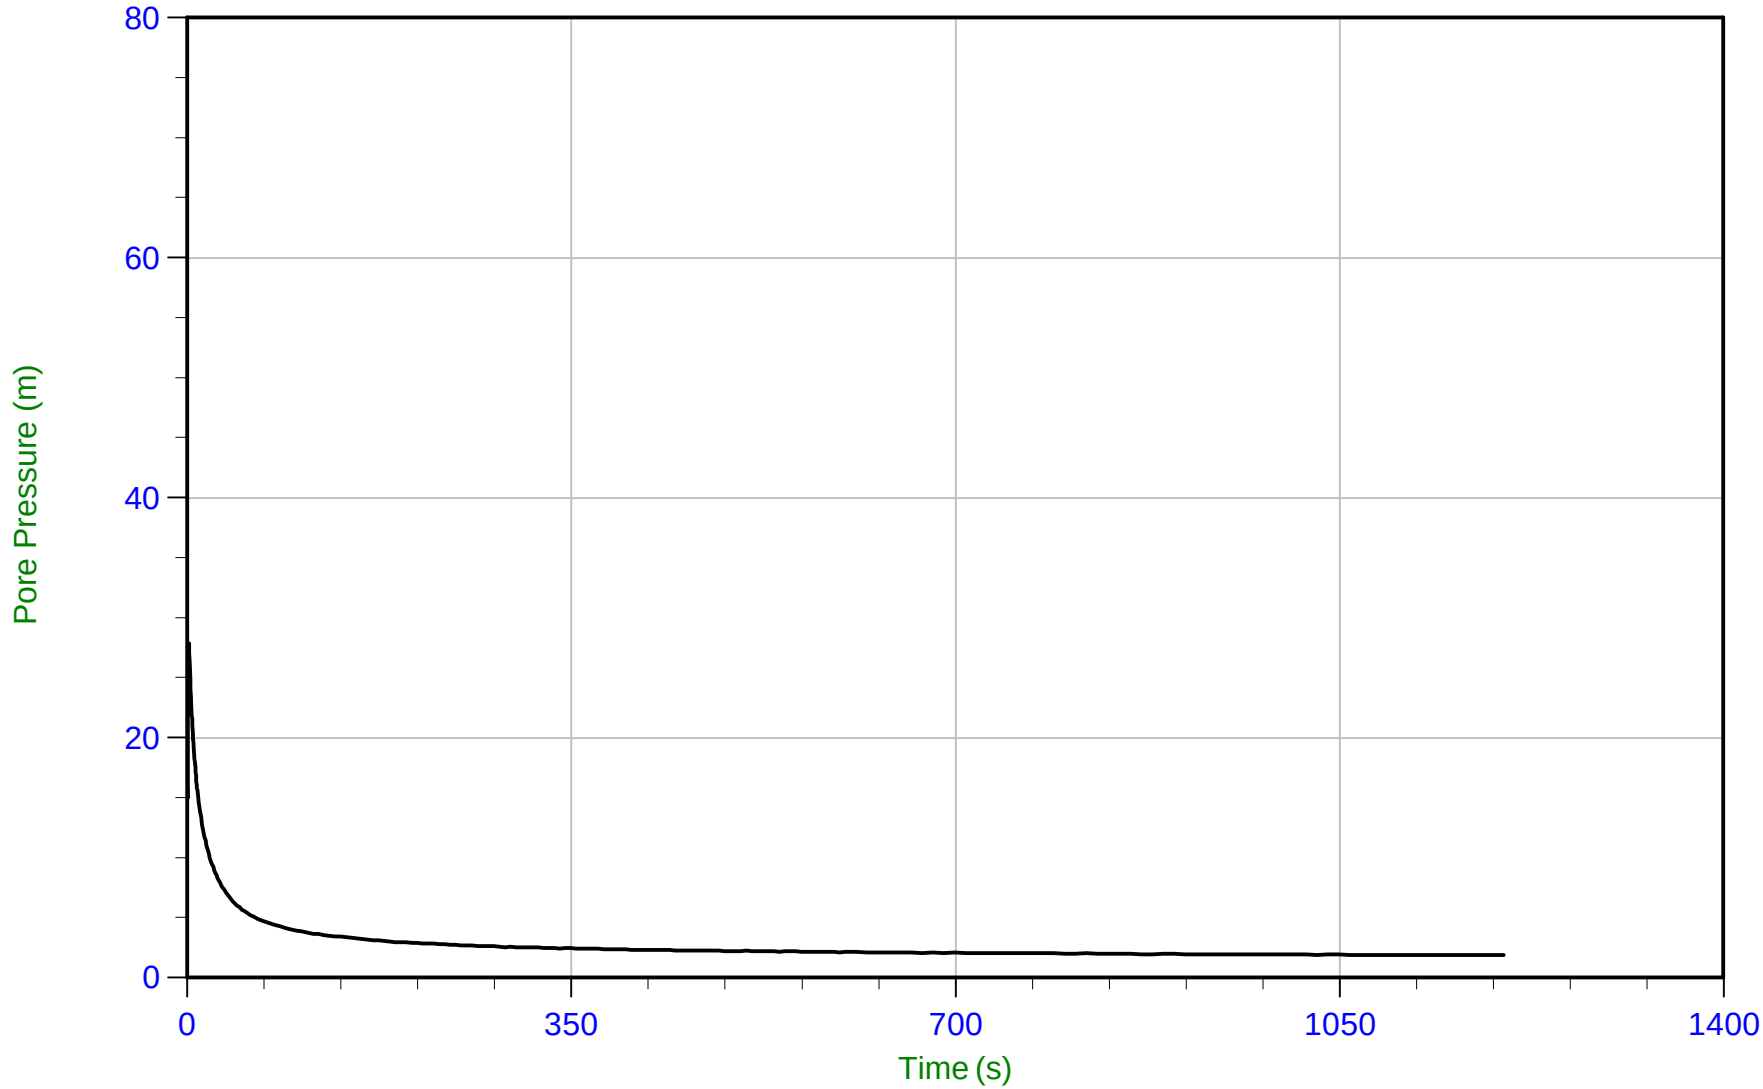

Trace Summary:

Filename: 22-02-23796_RP22-22CPT312.PPF
Depth: 4.900 m / 16.076 ft
Duration: 1200.0 s

u Min: 1.9 m
u Max: 27.9 m
u Final: 1.9 m

WT: 3.000 m / 9.842 ft
Ueq: 1.9 m
U(50): 14.88 m


T(50): 8.5 s
Ir: 100
Ch: 82.4 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/07/2022 08:55
Site: Brooks, Alberta

Sounding: RCPT22-22CPT313
Cone: 854:T1500F15U35 Area=15 cm²

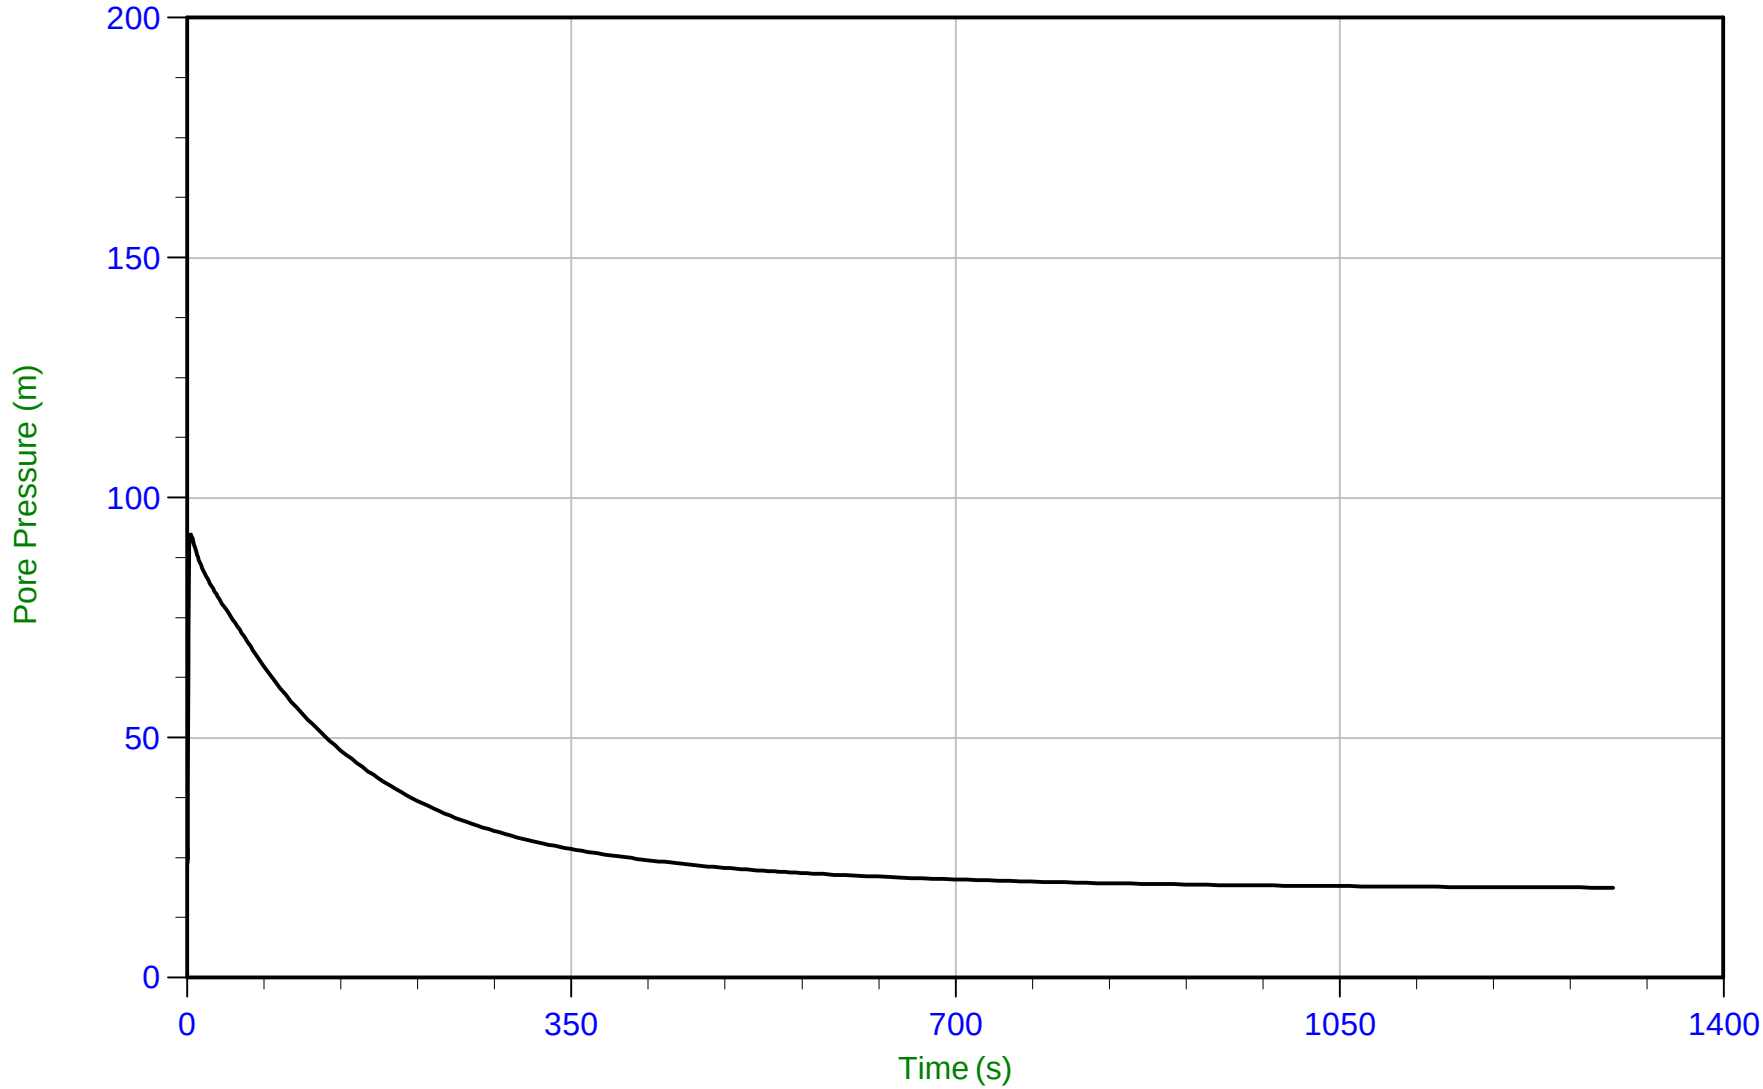

Trace Summary:

Filename: 22-02-23796_RP22-22CPT313.PPF
Depth: 7.025 m / 23.048 ft
Duration: 1300.0 s


u Min: 18.8 m
u Max: 92.4 m
u Final: 18.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/07/2022 09:56
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT314
Cone: 854:T1500F15U35 Area=15 cm²

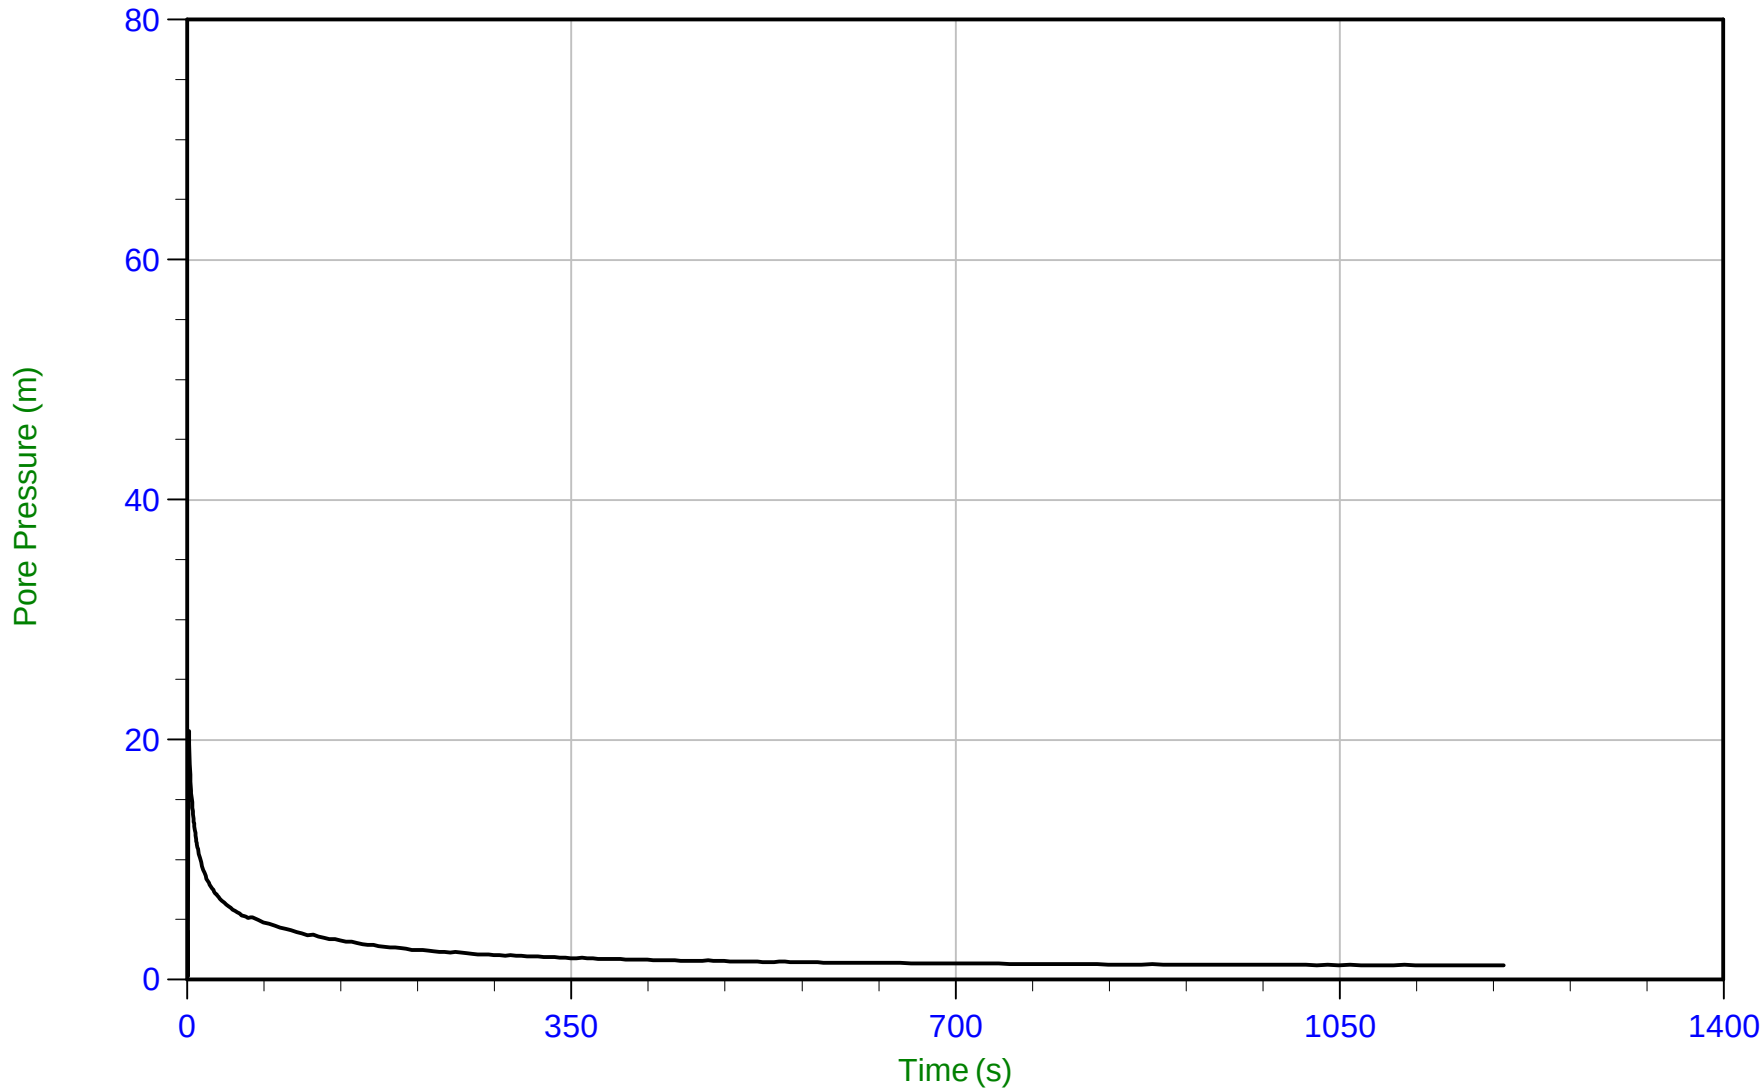

Trace Summary:

Filename: 22-02-23796_RS22-22CPT314.PPF
Depth: 3.875 m / 12.713 ft
Duration: 1200.0 s

u Min: 0.3 m
u Max: 20.7 m
u Final: 1.2 m

WT: 2.675 m / 8.776 ft
Ueq: 1.2 m
U(50): 10.96 m


T(50): 7.9 s
Ir: 100
Ch: 89.1 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/07/2022 09:56
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT314
Cone: 854:T1500F15U35 Area=15 cm²

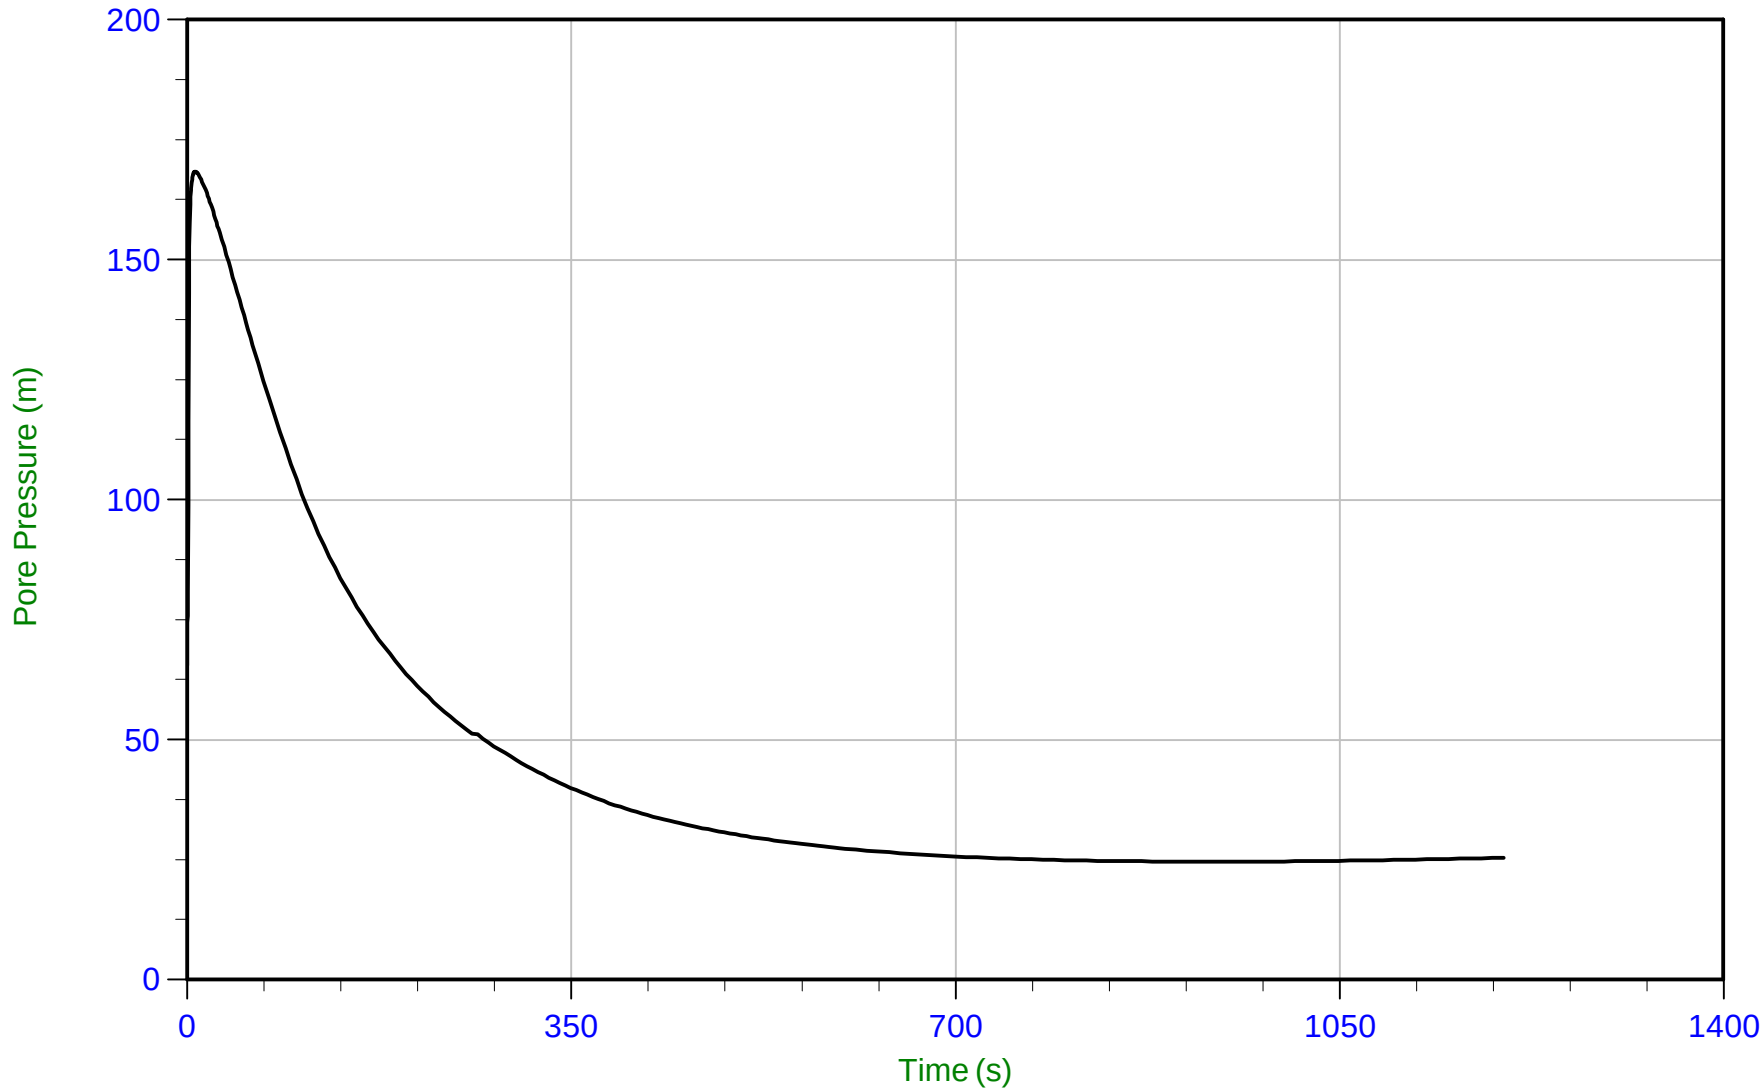

Trace Summary:

Filename: 22-02-23796_RS22-22CPT314.PPF
Depth: 9.875 m / 32.398 ft
Duration: 1200.0 s


u Min: 24.6 m
u Max: 168.3 m
u Final: 25.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/07/2022 12:10
Site: Brooks, Alberta

Sounding: RCPT22-22CPT315
Cone: 854:T1500F15U35 Area=15 cm²

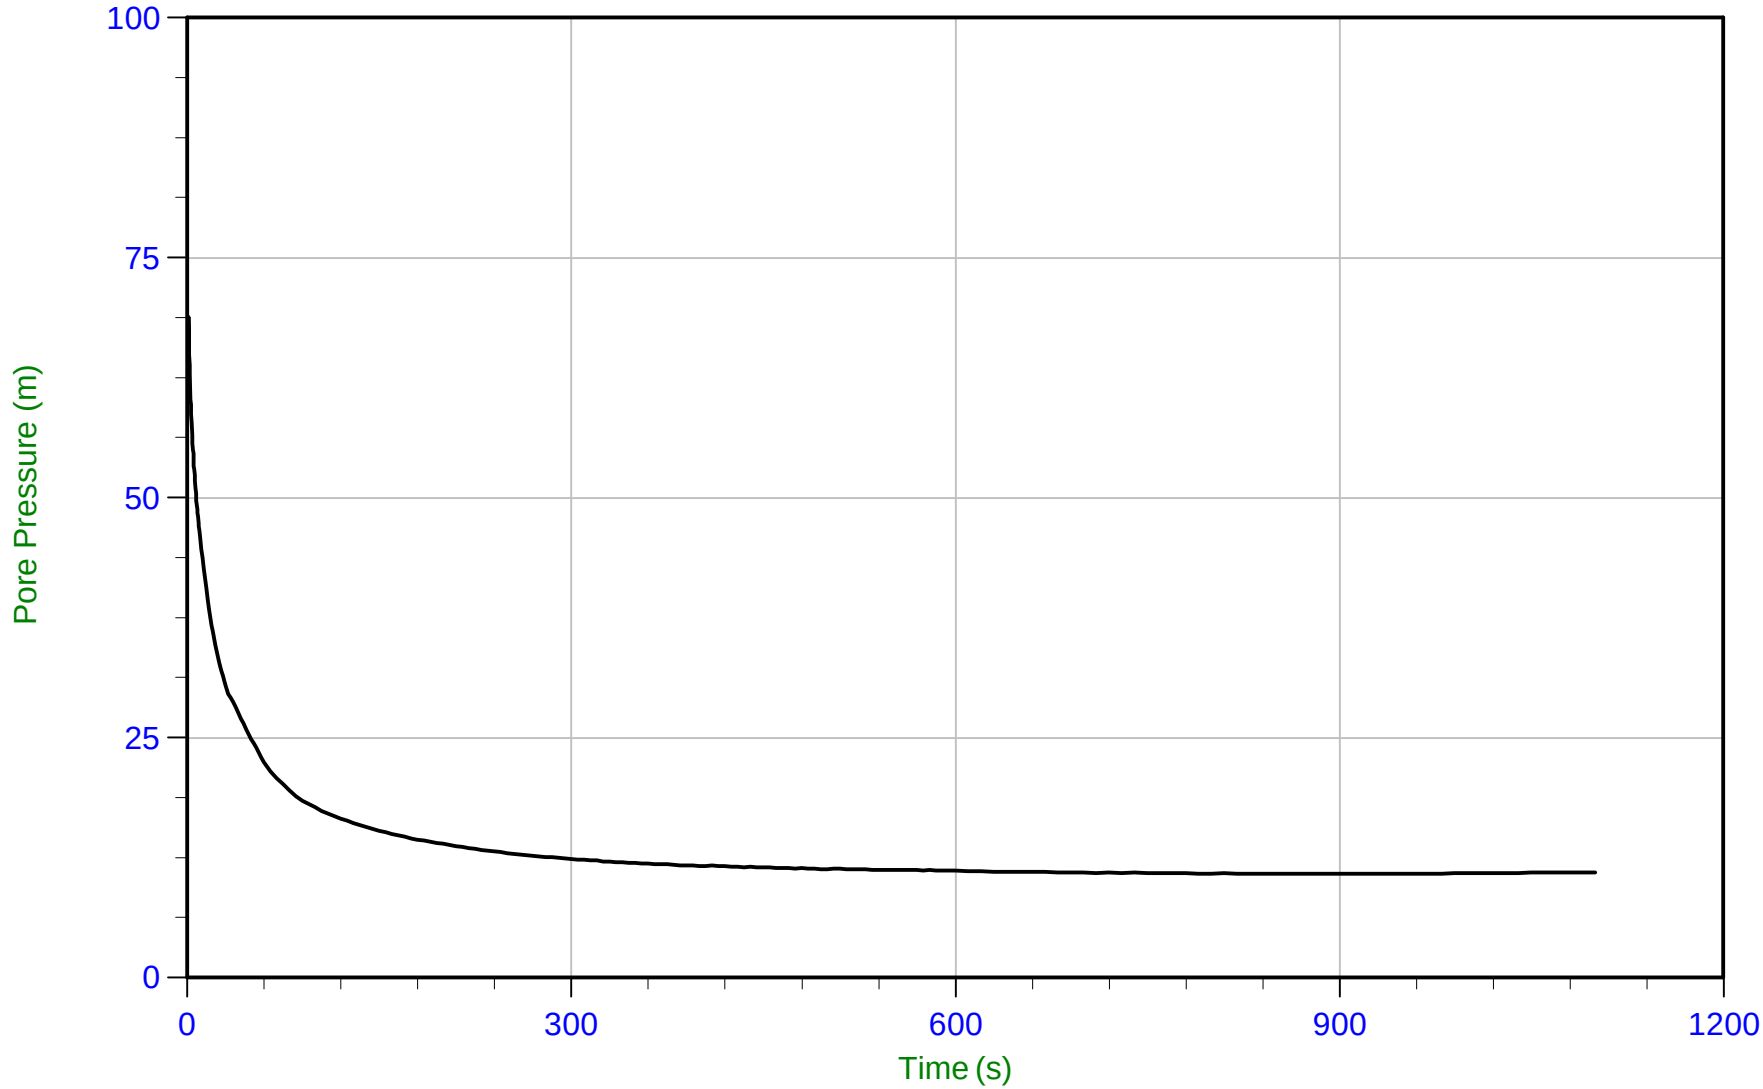

Trace Summary:

Filename: 22-02-23796_RP22-22CPT315.PPF
Depth: 5.850 m / 19.193 ft
Duration: 1100.0 s


u Min: 10.8 m
u Max: 68.9 m
u Final: 11.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/07/2022 13:06
Site: Brooks, Alberta

Sounding: RCPT22-22CPT316
Cone: 854:T1500F15U35 Area=15 cm²

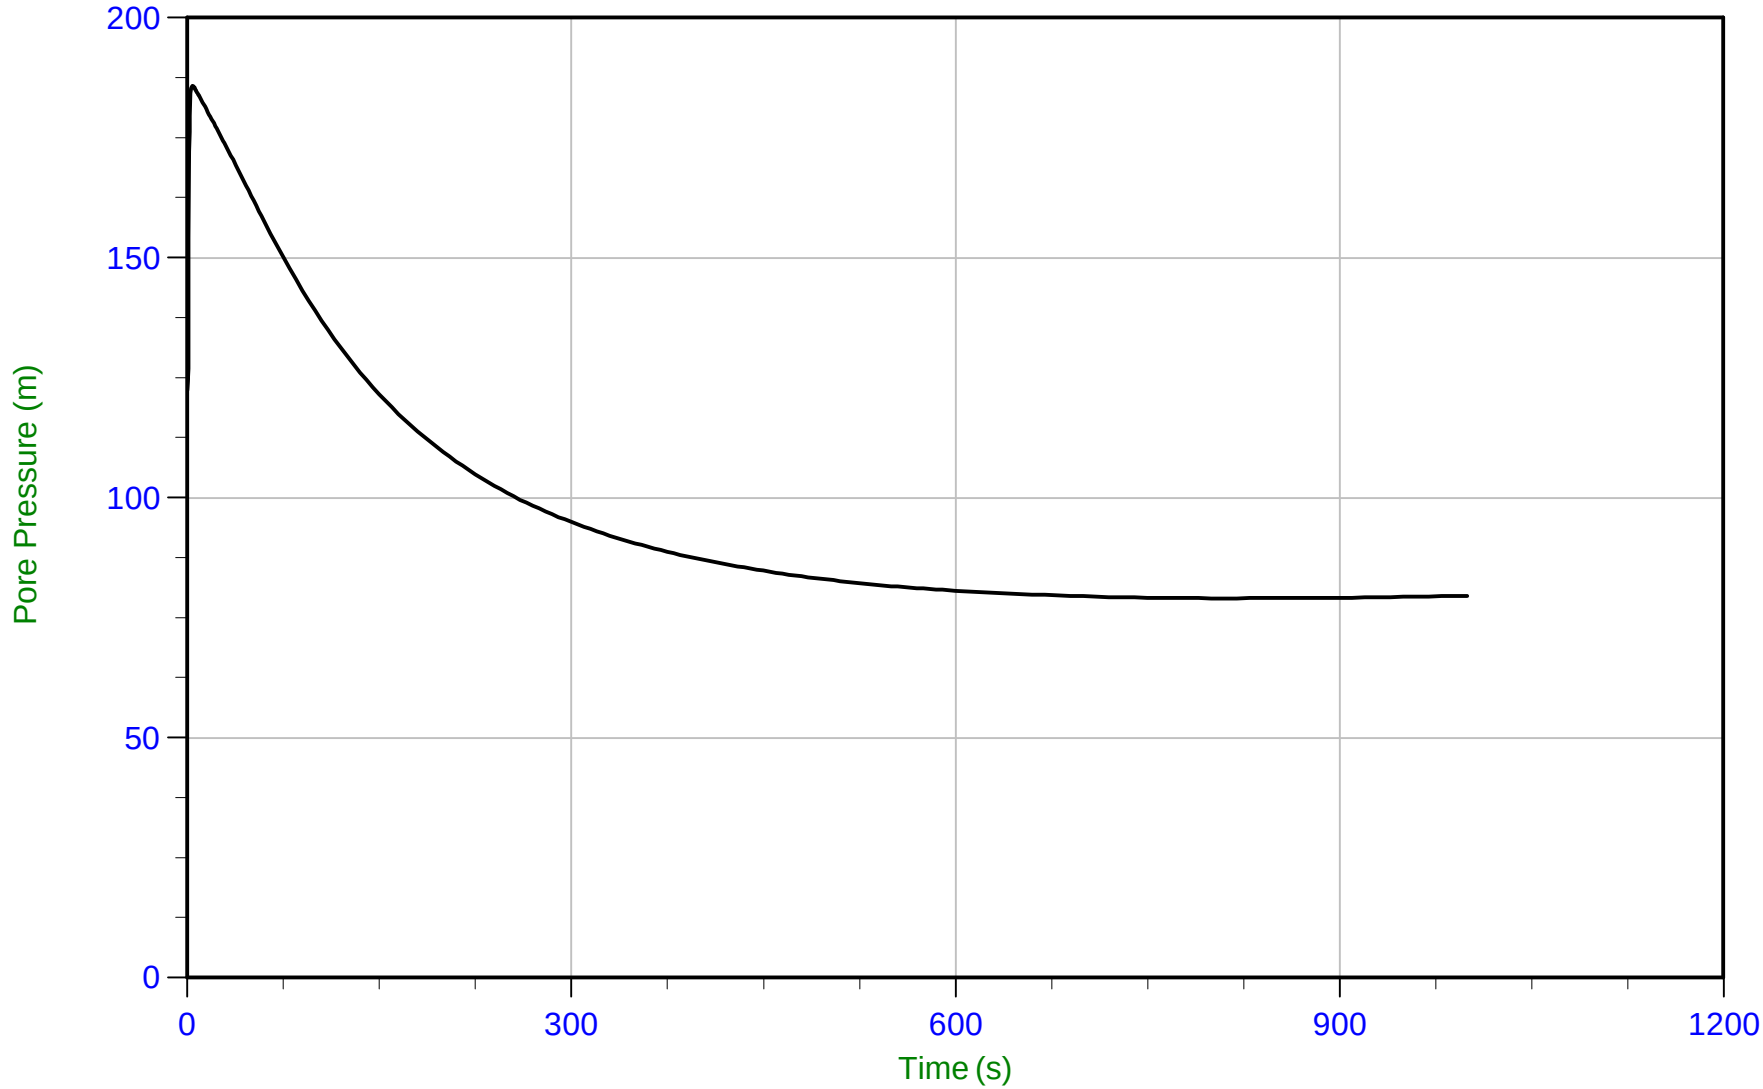

Trace Summary:

Filename: 22-02-23796_RP22-22CPT316.PPF
Depth: 7.350 m / 24.114 ft
Duration: 1000.0 s


u Min: 79.0 m
u Max: 185.8 m
u Final: 79.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/07/2022 14:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT317
Cone: 854:T1500F15U35 Area=15 cm²

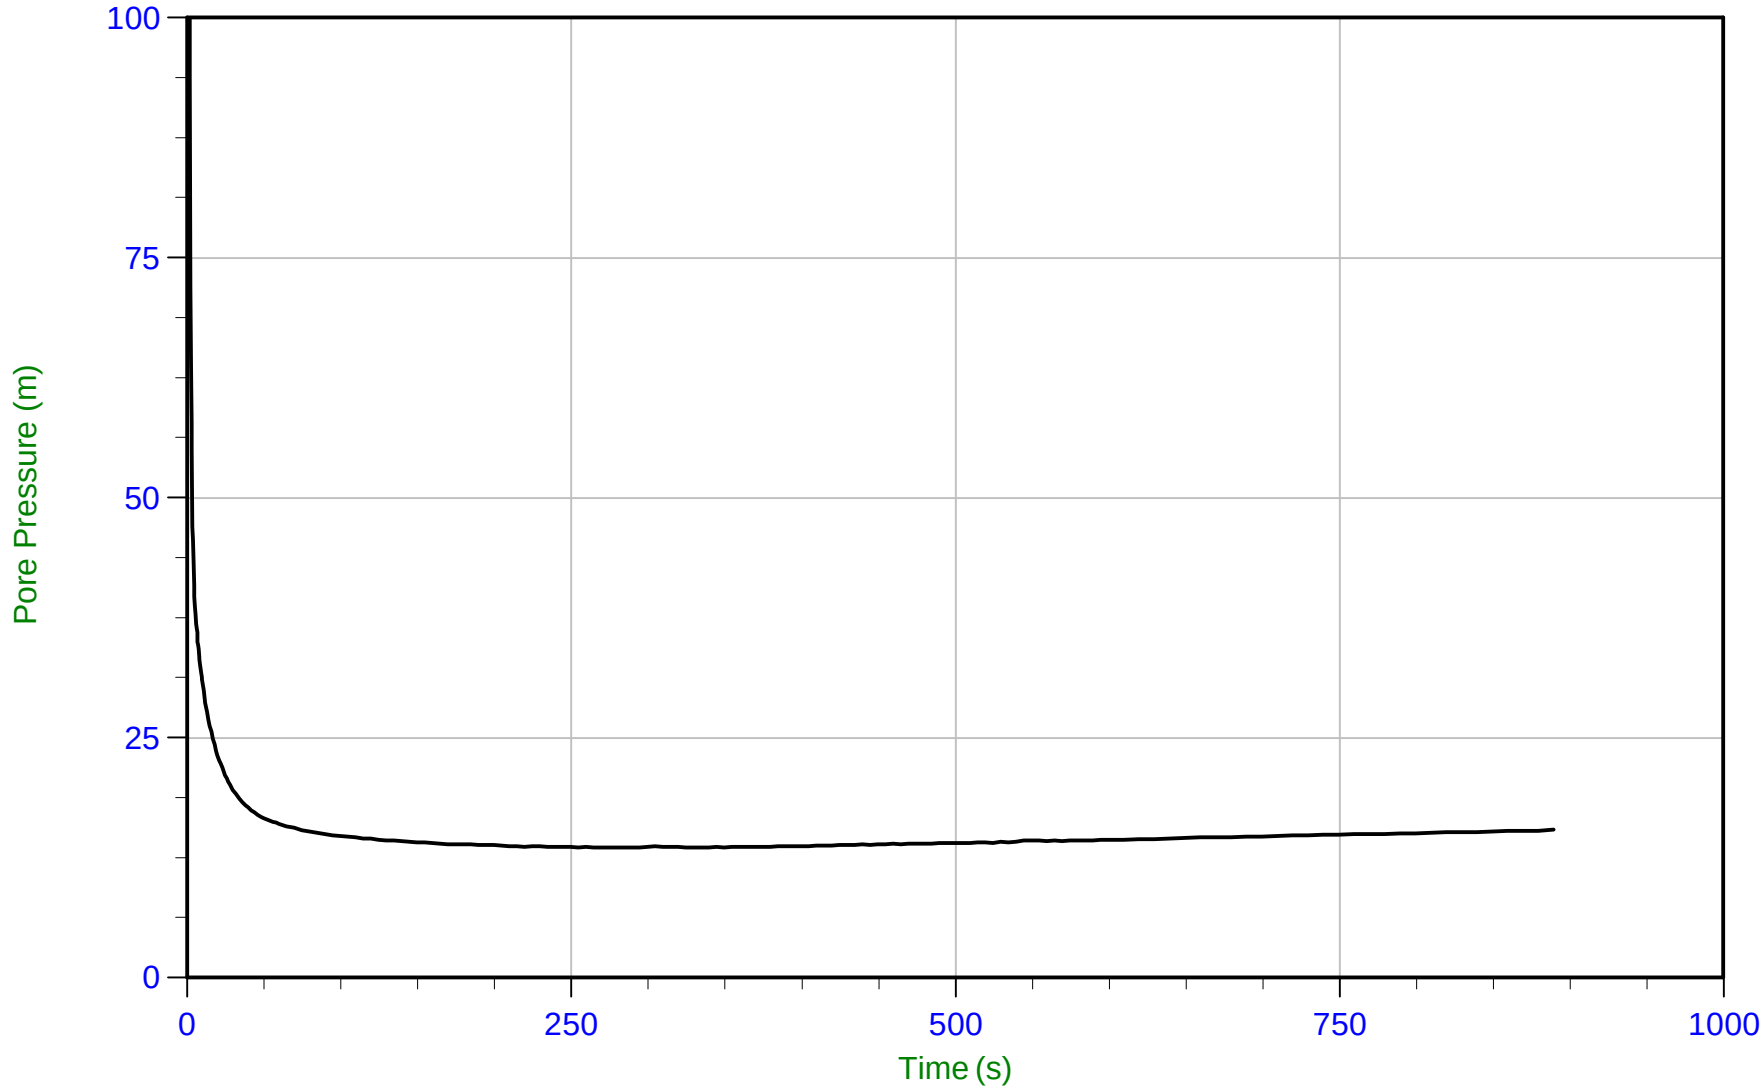

Trace Summary:

Filename: 22-02-23796_RP22-22CPT317.PPF
Depth: 4.950 m / 16.240 ft
Duration: 890.0 s


u Min: 13.5 m
u Max: 159.3 m
u Final: 15.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/07/2022 14:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT317
Cone: 854:T1500F15U35 Area=15 cm²

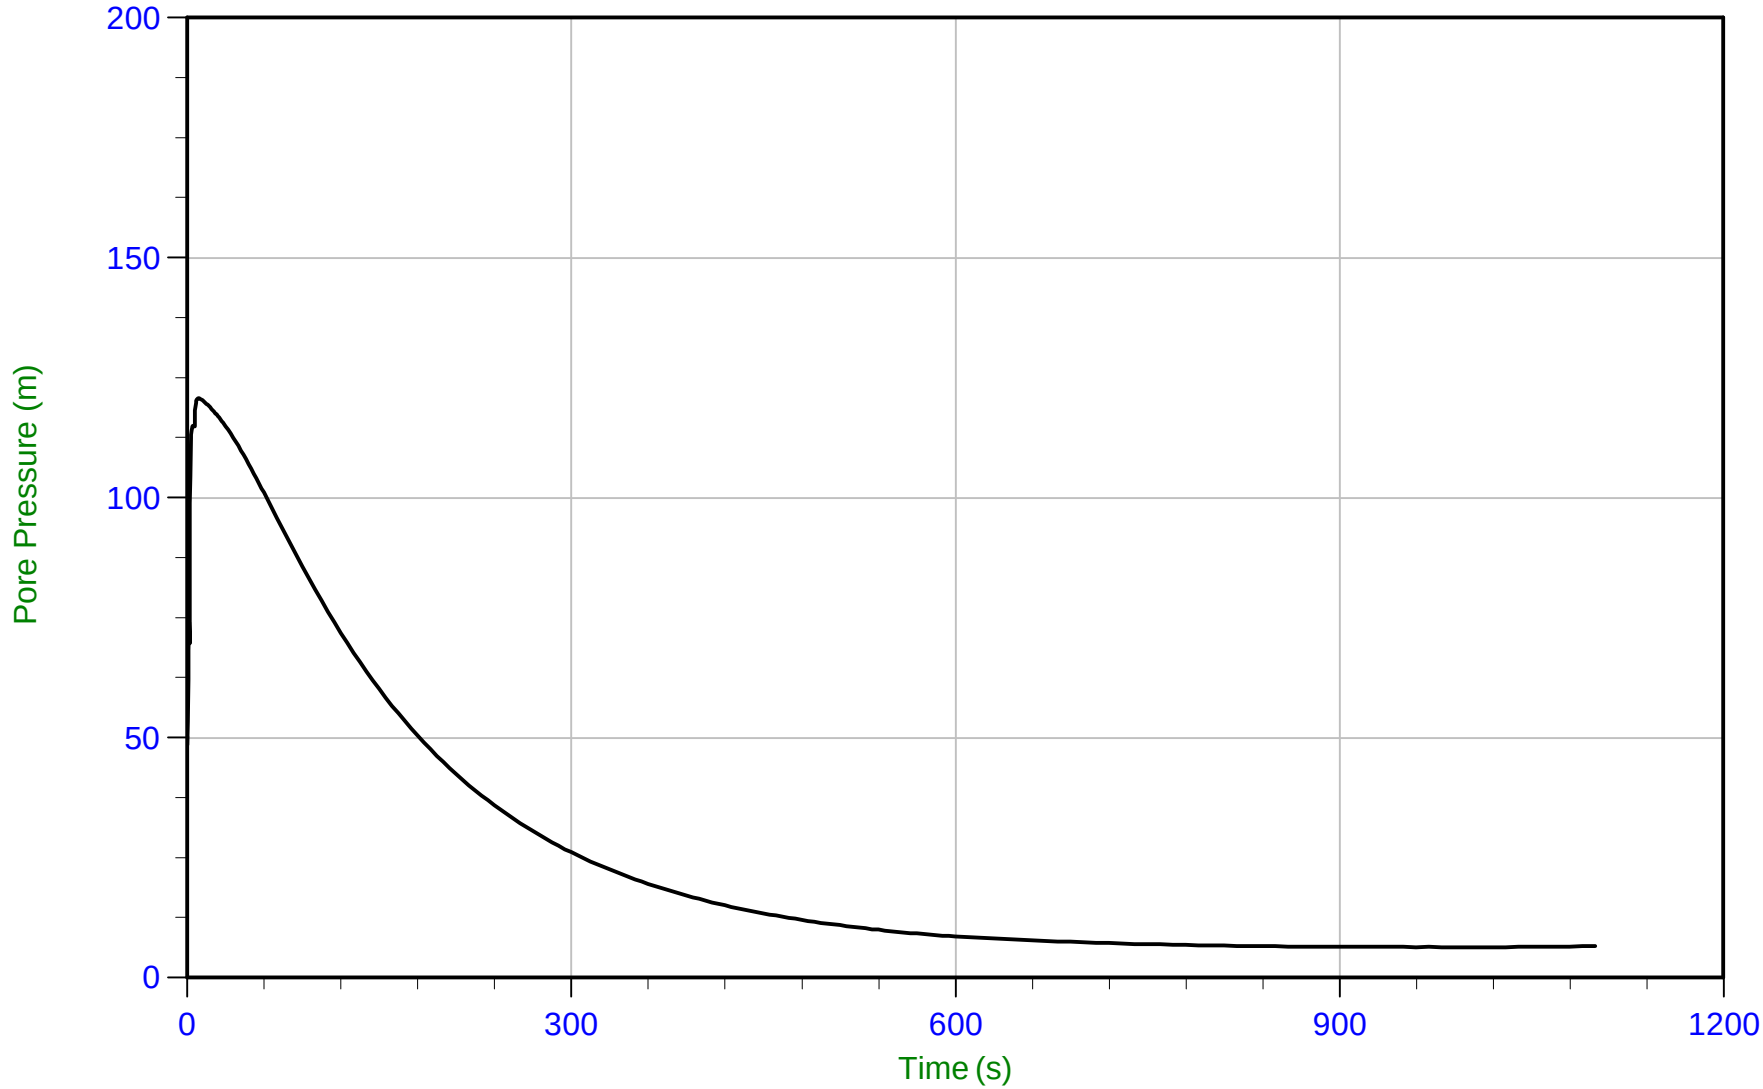

Trace Summary:

Filename: 22-02-23796_RP22-22CPT317.PPF
Depth: 7.900 m / 25.918 ft
Duration: 1100.0 s

u Min: 6.4 m
u Max: 120.7 m
u Final: 6.6 m

WT: 1.300 m / 4.265 ft
Ueq: 6.6 m
U(50): 63.66 m


T(50): 131.6 s
Ir: 100
Ch: 5.3 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/07/2022 15:26
Site: Brooks, Alberta

Sounding: RCPT22-22CPT318
Cone: 854:T1500F15U35 Area=15 cm²

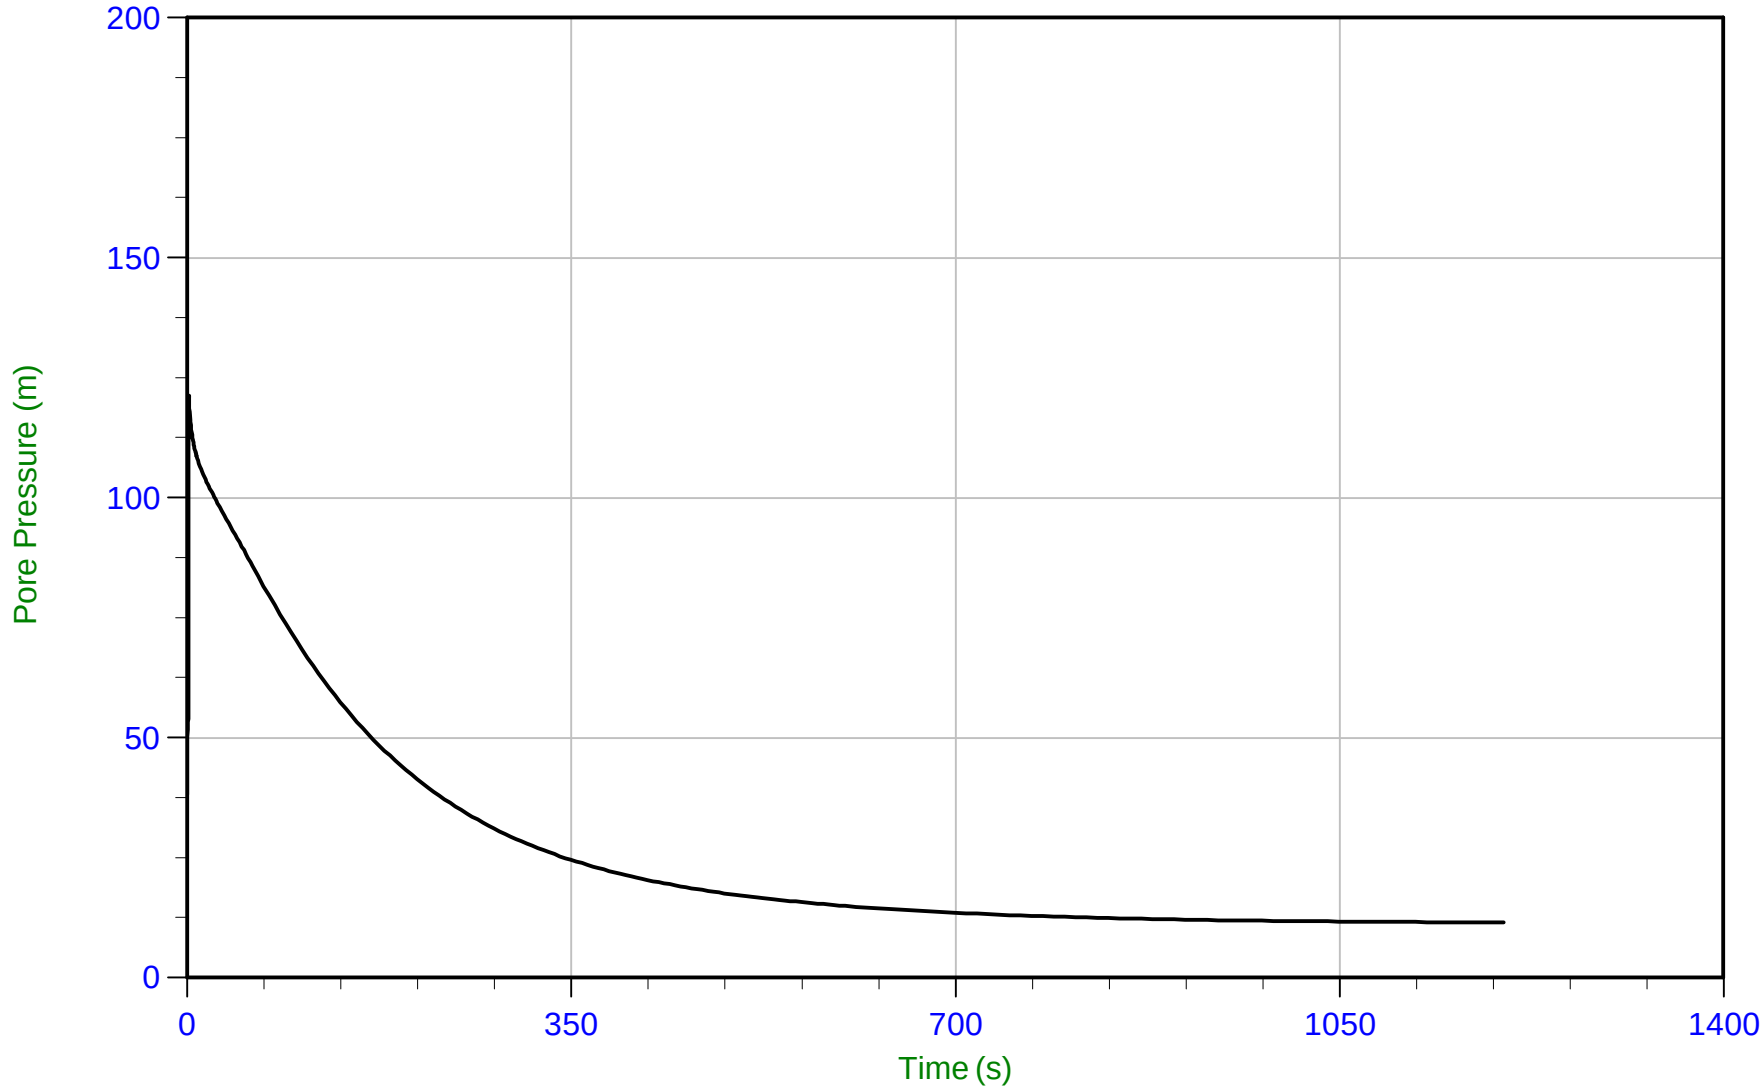

Trace Summary:

Filename: 22-02-23796_RP22-22CPT318.PPF
Depth: 5.850 m / 19.193 ft
Duration: 1200.0 s


u Min: 11.5 m
u Max: 121.3 m
u Final: 11.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/08/2022 07:05
Site: Brooks, Alberta

Sounding: RCPT22-22CPT319
Cone: 854:T1500F15U35 Area=15 cm²

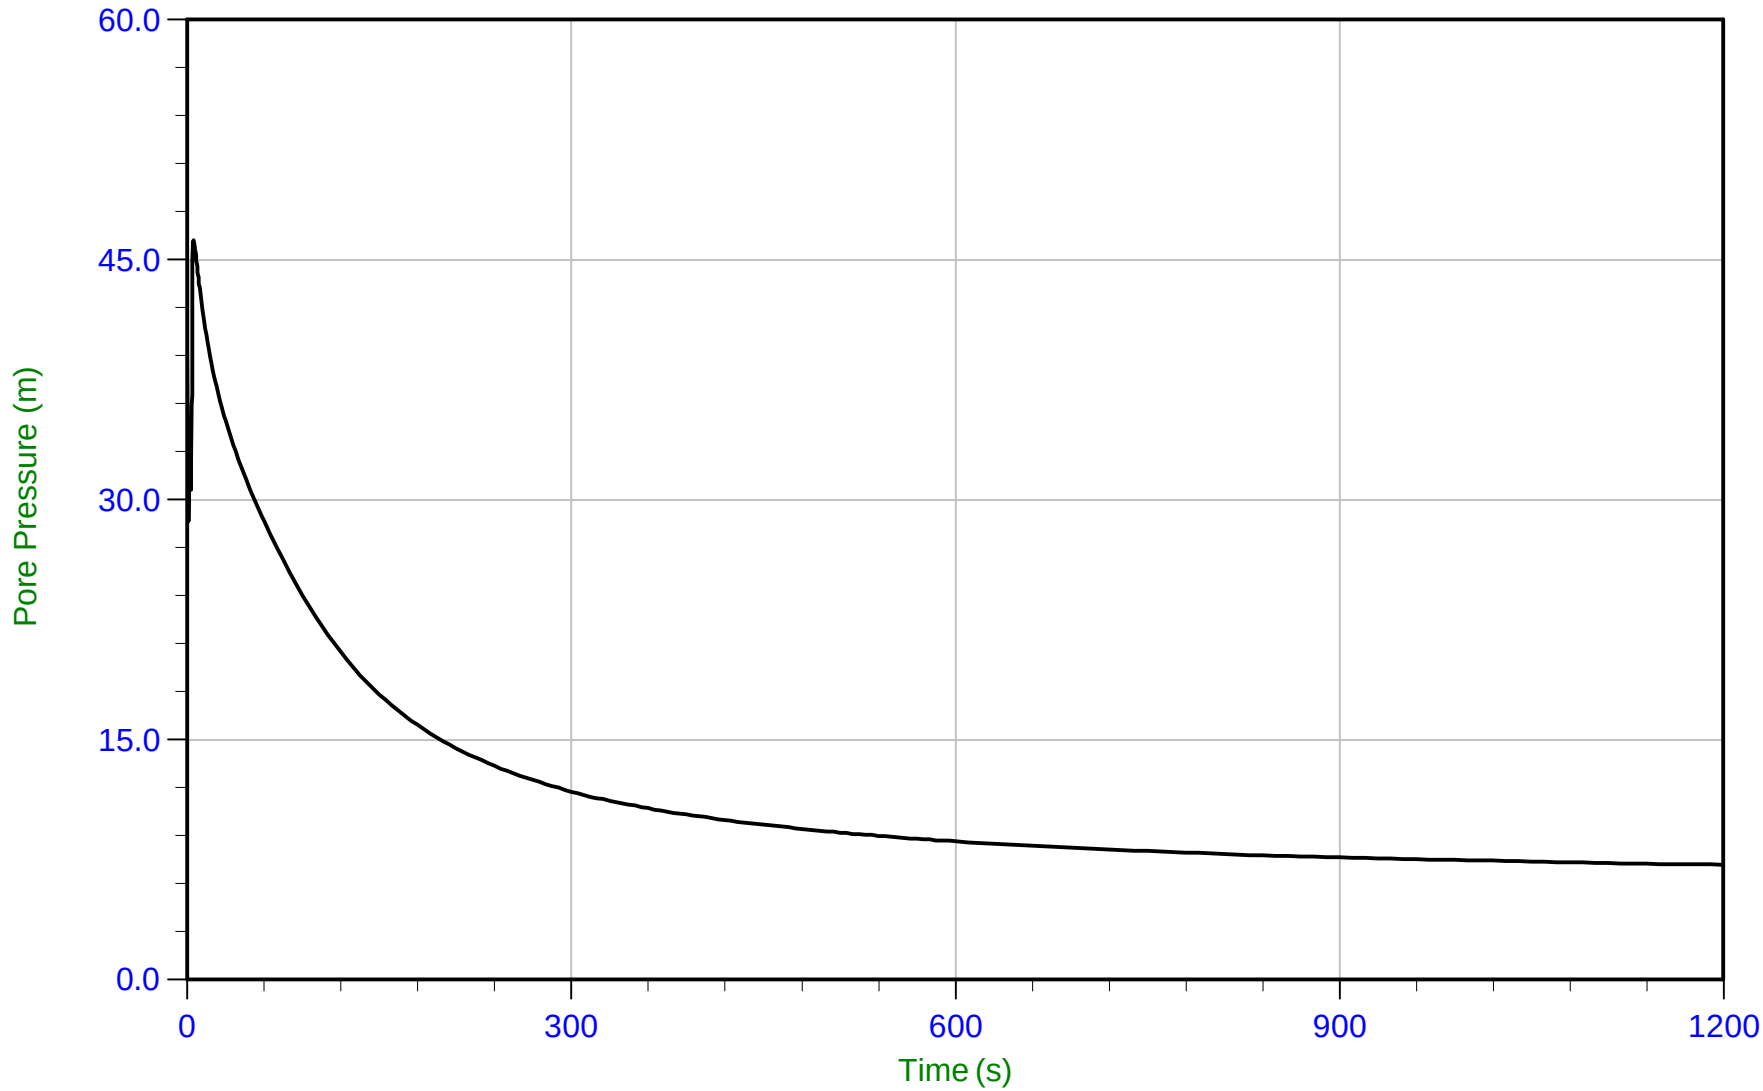

Trace Summary:

Filename: 22-02-23796_RP22-22CPT319.PPF
Depth: 4.775 m / 15.666 ft
Duration: 1200.0 s


u Min: 7.2 m
u Max: 46.2 m
u Final: 7.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/08/2022 08:23
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT320
Cone: 854:T1500F15U35 Area=15 cm²

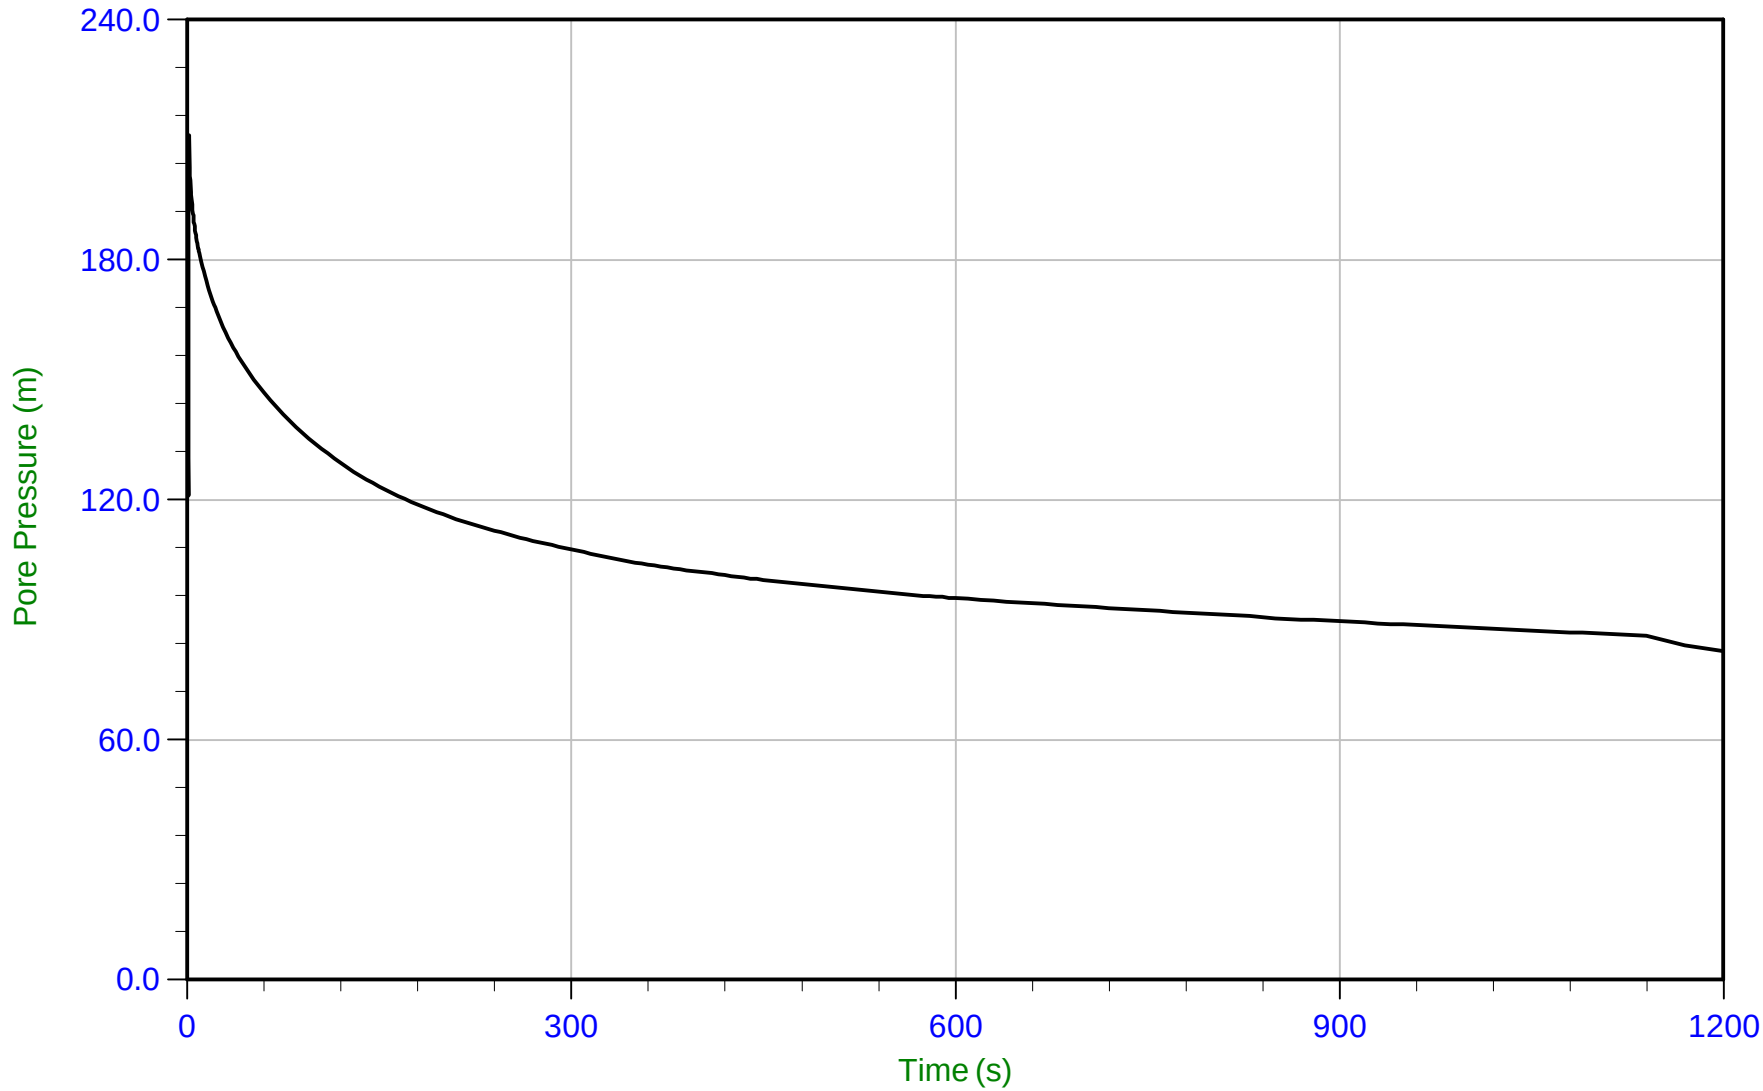

Trace Summary:

Filename: 22-02-23796_RS22-22CPT320.PPF
Depth: 6.775 m / 22.227 ft
Duration: 1200.0 s


u Min: 82.2 m
u Max: 211.2 m
u Final: 82.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/08/2022 10:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT321
Cone: 854:T1500F15U35 Area=15 cm²

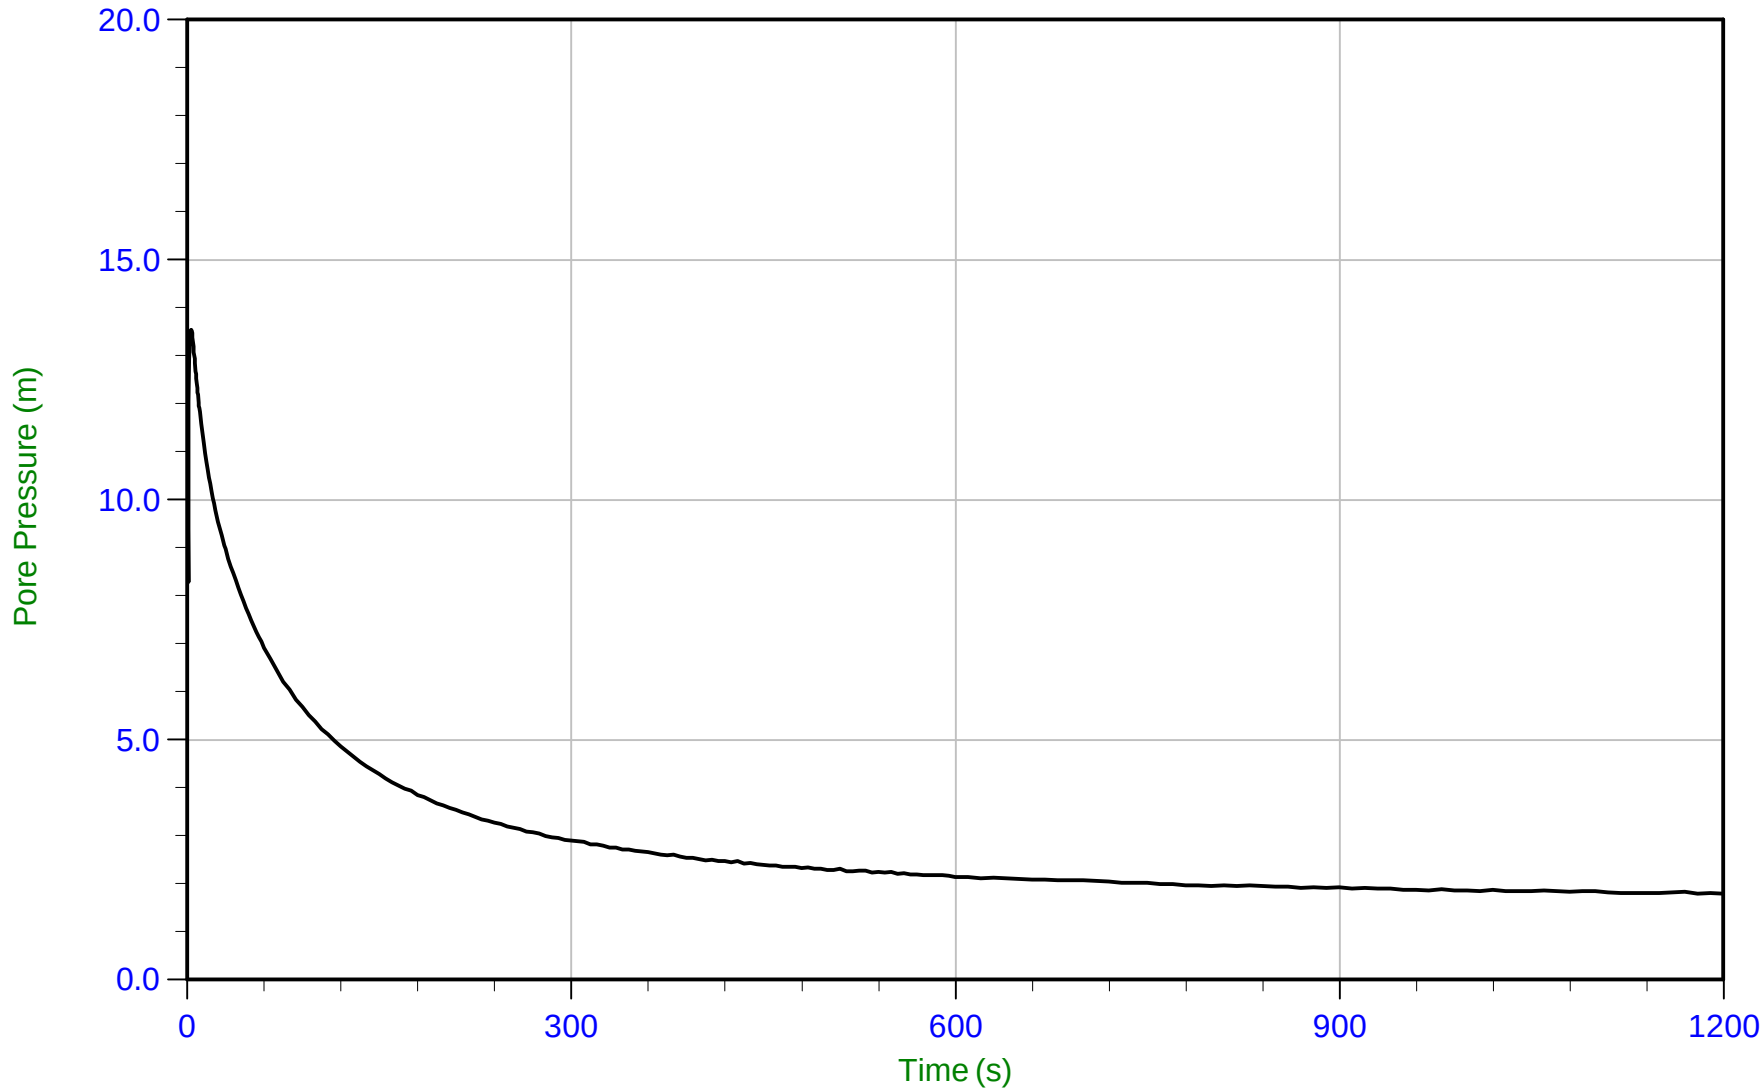

Trace Summary:

Filename: 22-02-23796_RP22-22CPT321.PPF
Depth: 5.875 m / 19.275 ft
Duration: 1200.0 s


u Min: 1.8 m
u Max: 13.5 m
u Final: 1.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/08/2022 11:09
Site: Brooks, Alberta

Sounding: RCPT22-22CPT322
Cone: 854:T1500F15U35 Area=15 cm²

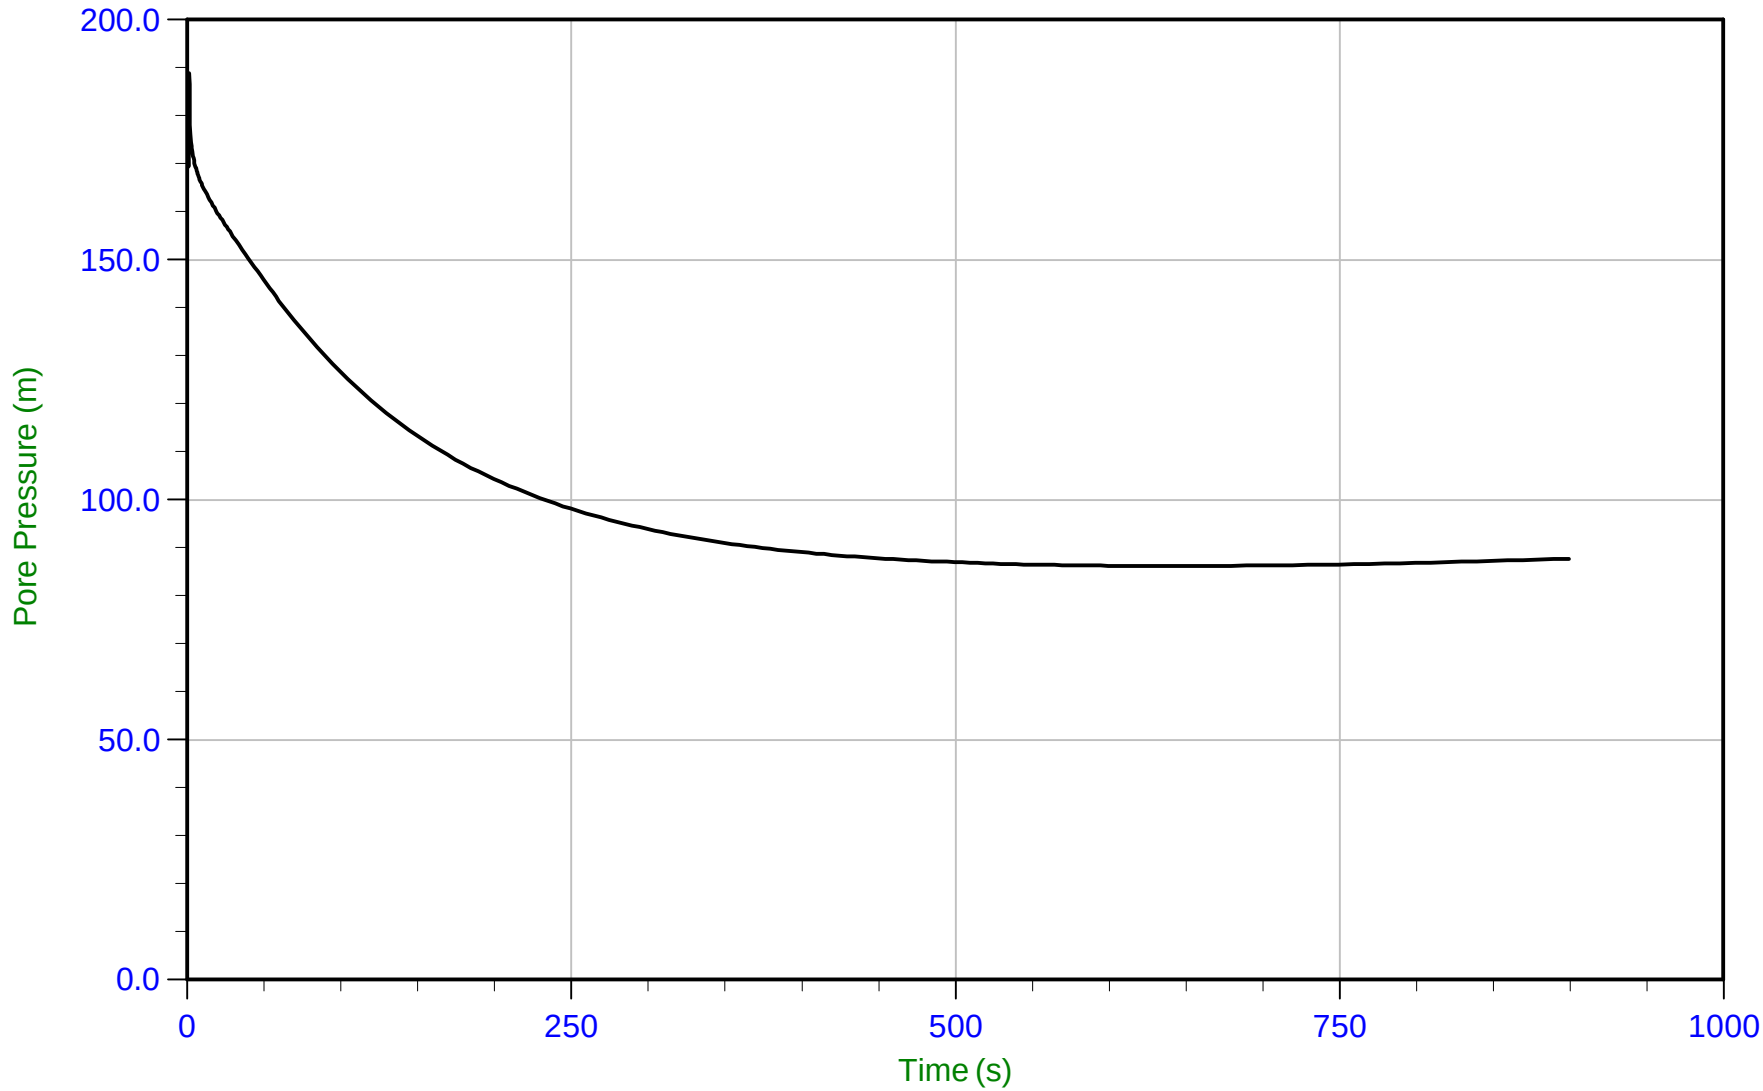

Trace Summary:

Filename: 22-02-23796_RP22-22CPT322.PPF
Depth: 7.025 m / 23.048 ft
Duration: 900.0 s


u Min: 86.2 m
u Max: 188.9 m
u Final: 87.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/08/2022 12:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT323
Cone: 854:T1500F15U35 Area=15 cm²

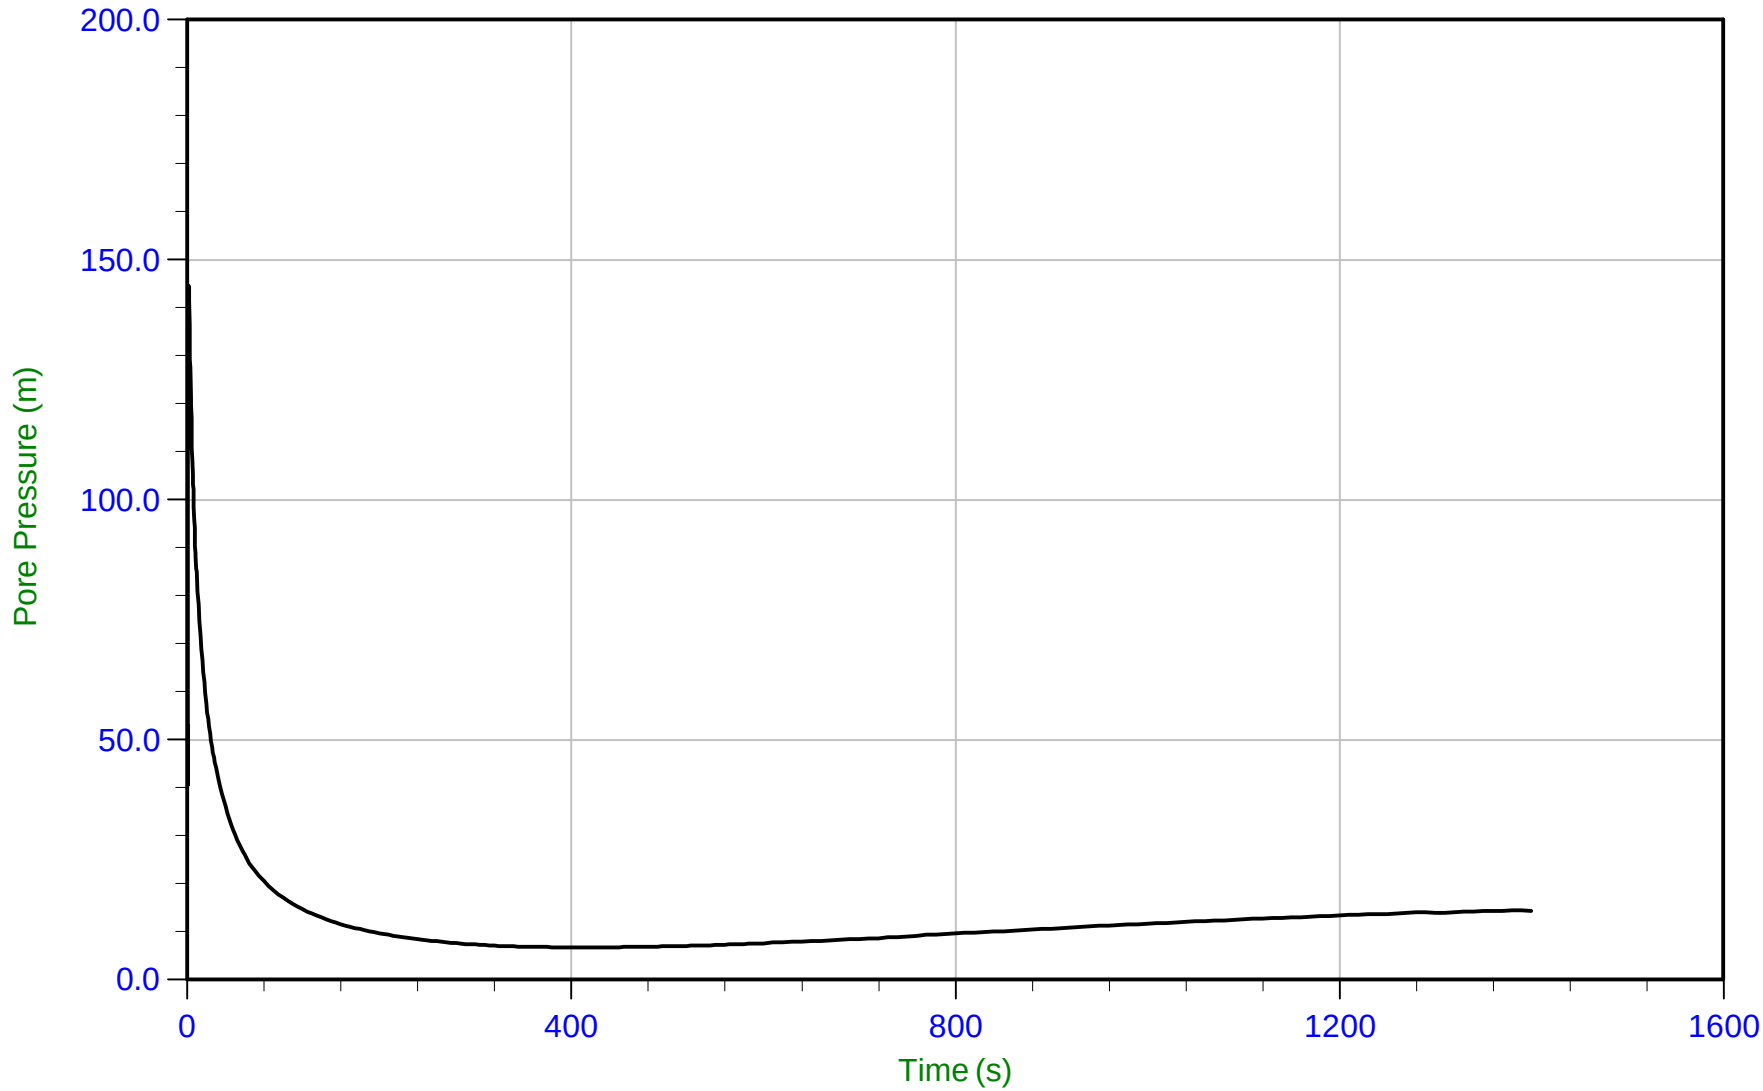

Trace Summary:

Filename: 22-02-23796_RP22-22CPT323.PPF
Depth: 7.825 m / 25.672 ft
Duration: 1400.0 s


u Min: 6.7 m
u Max: 144.6 m
u Final: 14.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/08/2022 13:57
Site: Brooks, Alberta

Sounding: RCPT22-22CPT324
Cone: 854:T1500F15U35 Area=15 cm²

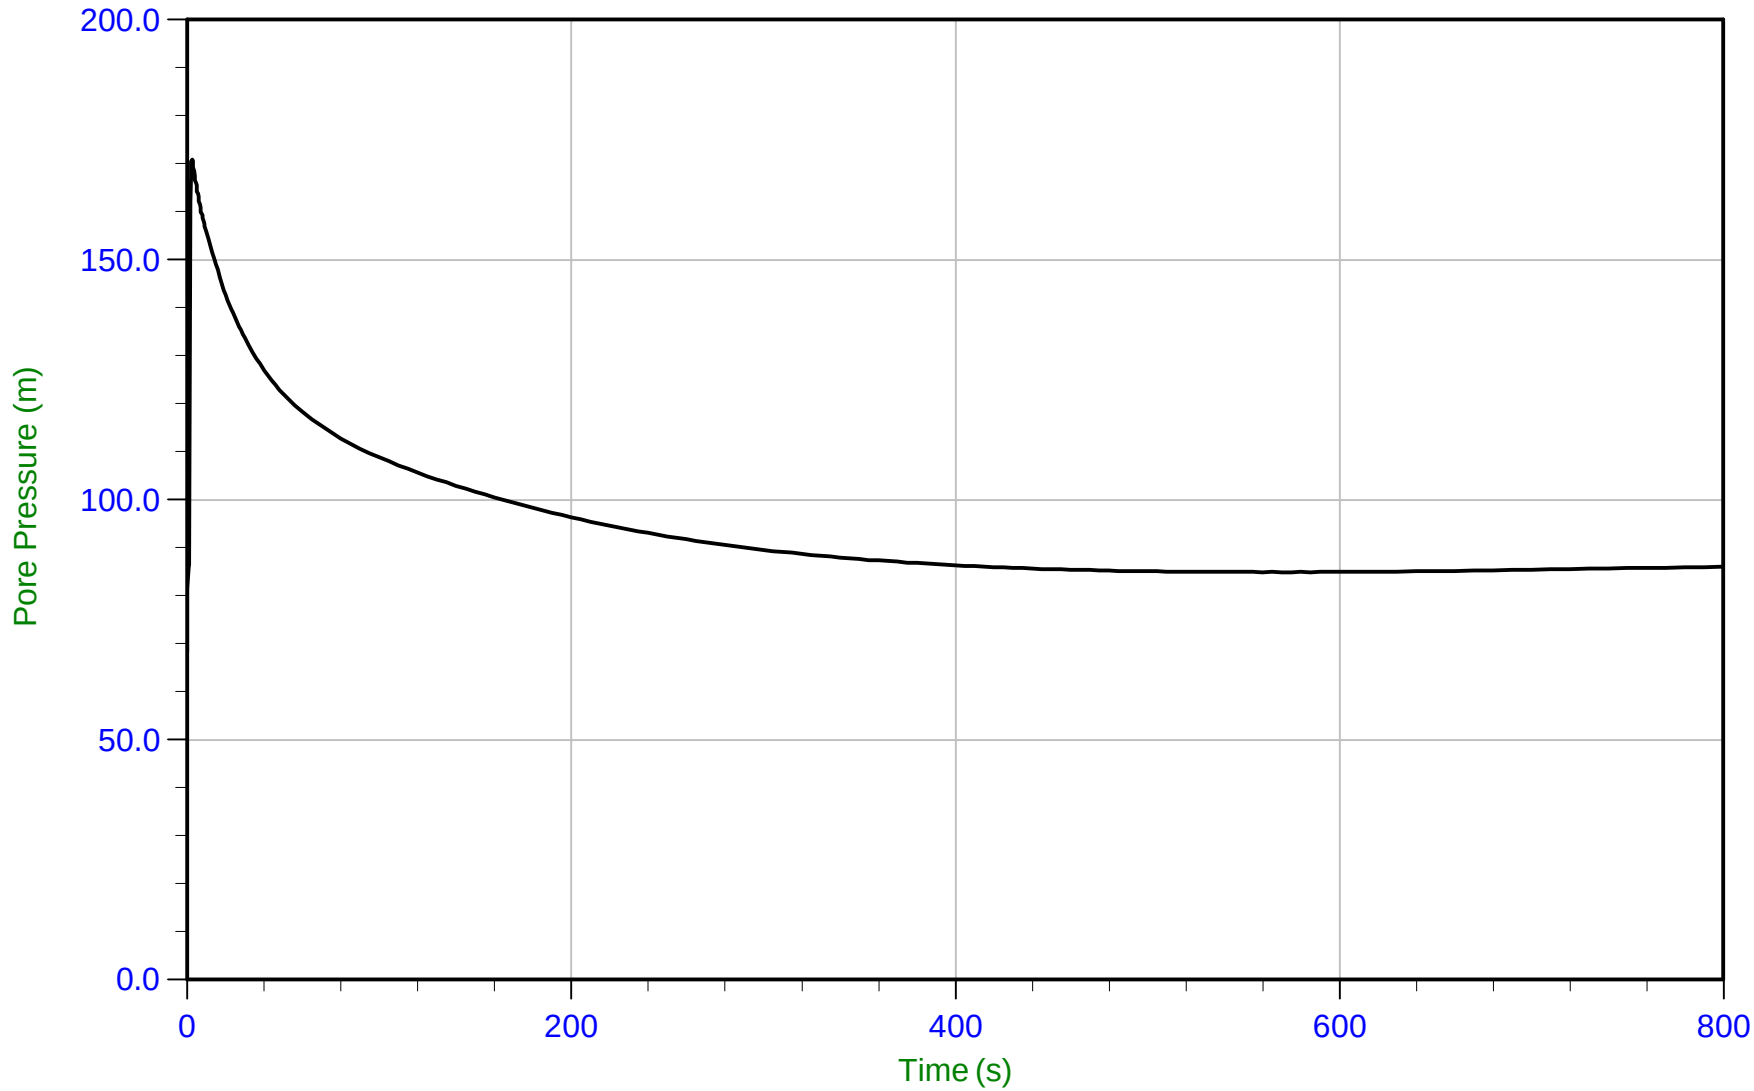

Trace Summary:

Filename: 22-02-23796_RP22-22CPT324.PPF
Depth: 3.875 m / 12.713 ft
Duration: 800.0 s


u Min: 68.4 m
u Max: 170.9 m
u Final: 86.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/08/2022 16:53
Site: Brooks, Alberta

Sounding: RCPT22-22CPT325
Cone: 854:T1500F15U35 Area=15 cm²

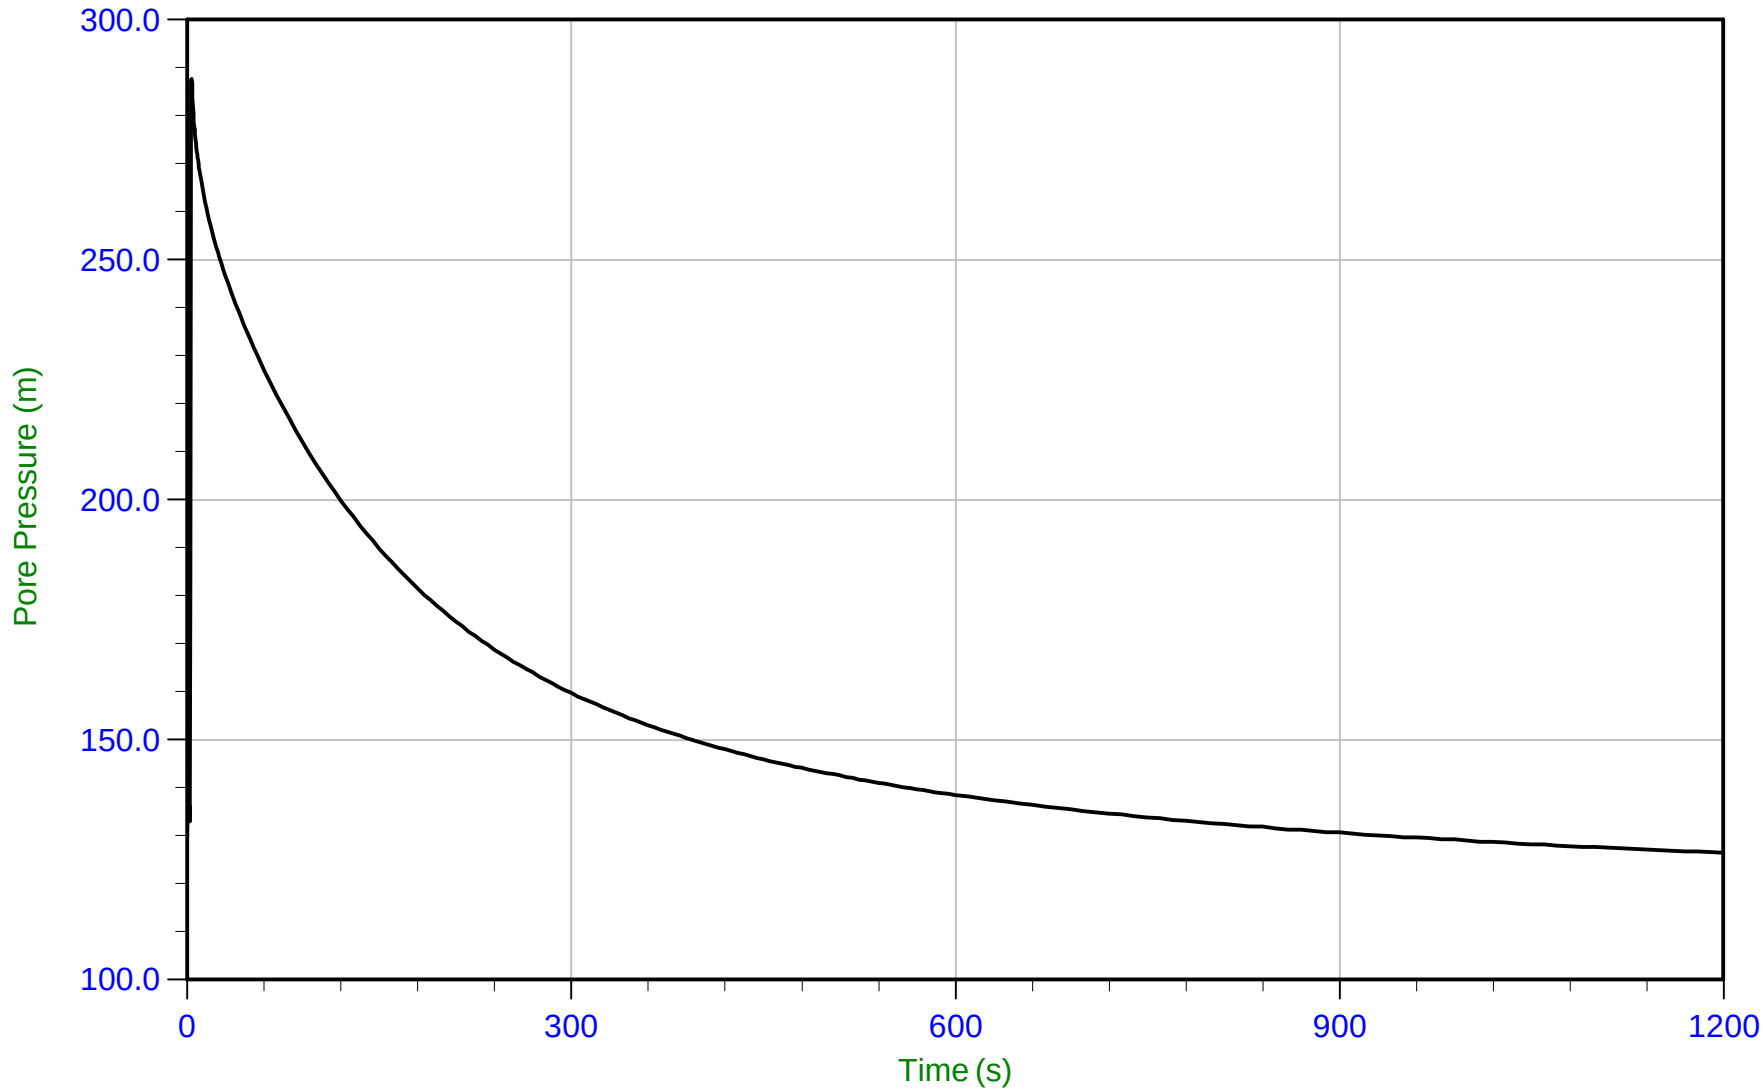

Trace Summary:

Filename: 22-02-23796_RP22-22CPT325.PPF
Depth: 5.925 m / 19.439 ft
Duration: 1200.0 s


u Min: 126.4 m
u Max: 287.6 m
u Final: 126.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/09/2022 09:27
Site: Brooks, Alberta

Sounding: RCPT22-22CPT327
Cone: 854:T1500F15U35 Area=15 cm²

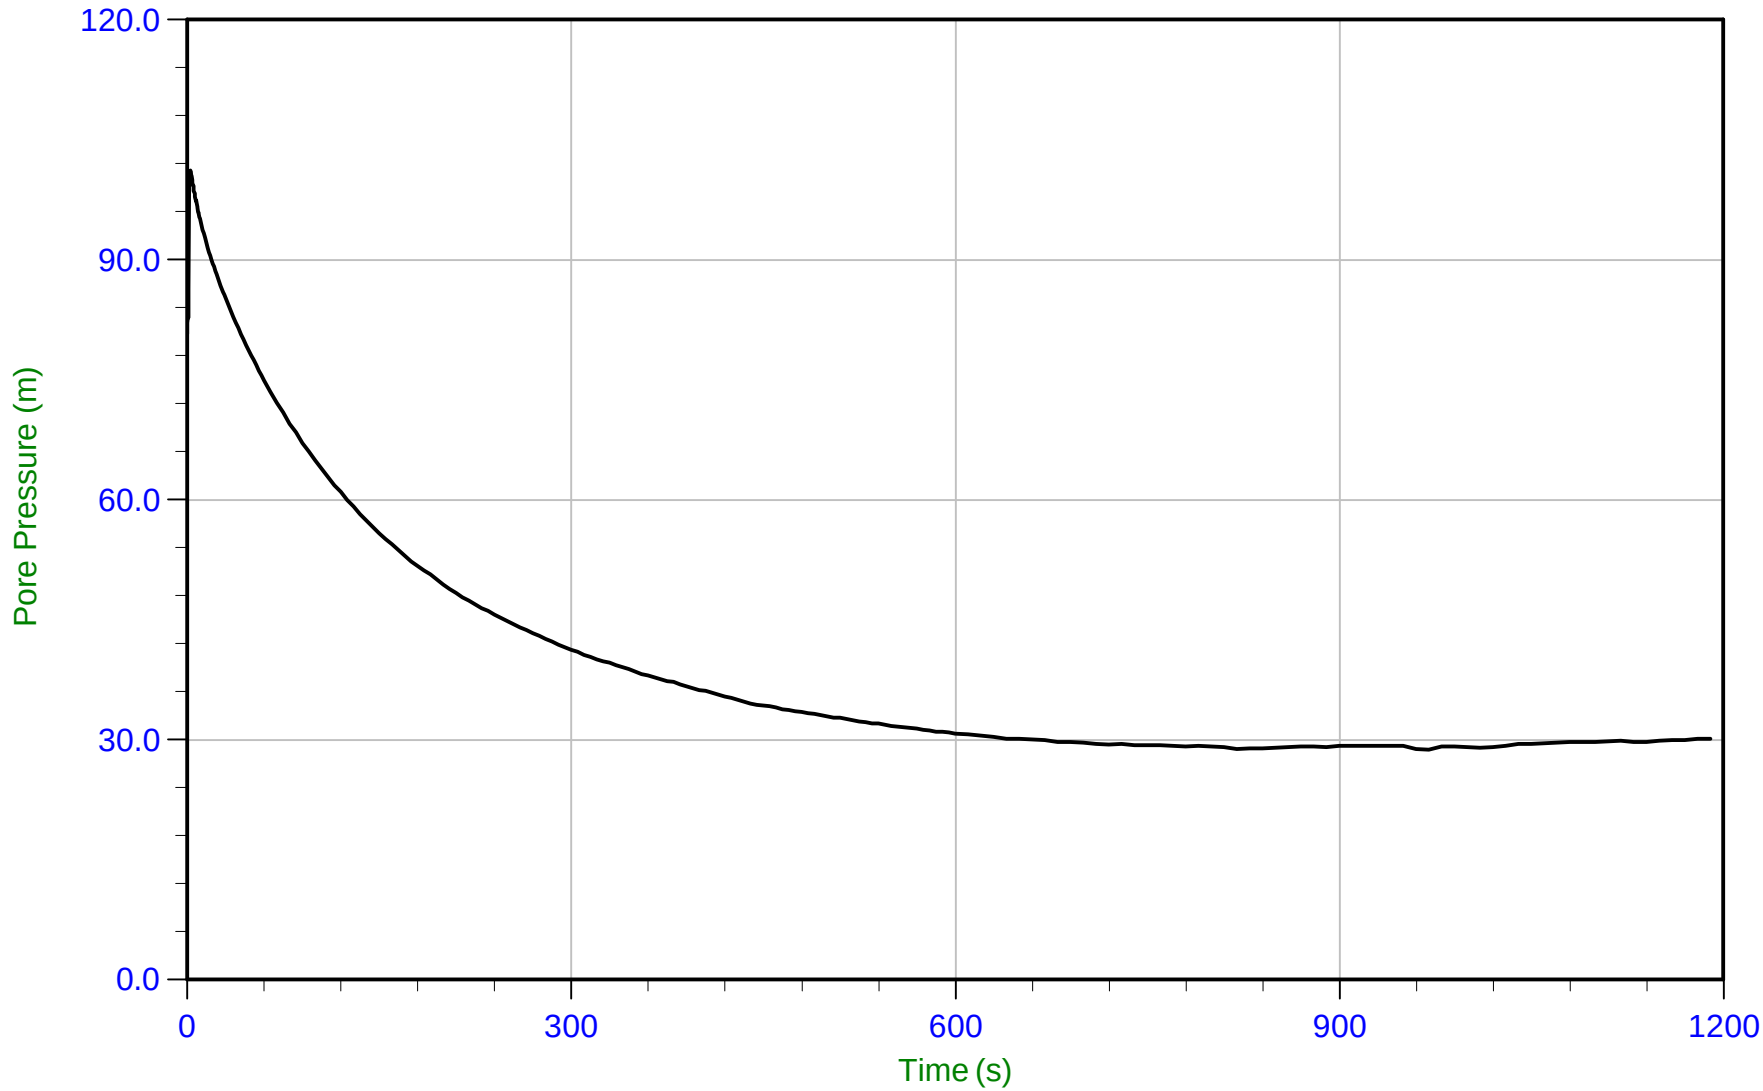

Trace Summary:

Filename: 22-02-23796_RP22-22CPT327.PPF
Depth: 5.850 m / 19.193 ft
Duration: 1190.0 s


u Min: 28.7 m
u Max: 101.2 m
u Final: 30.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/09/2022 10:28
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT328
Cone: 854:T1500F15U35 Area=15 cm²

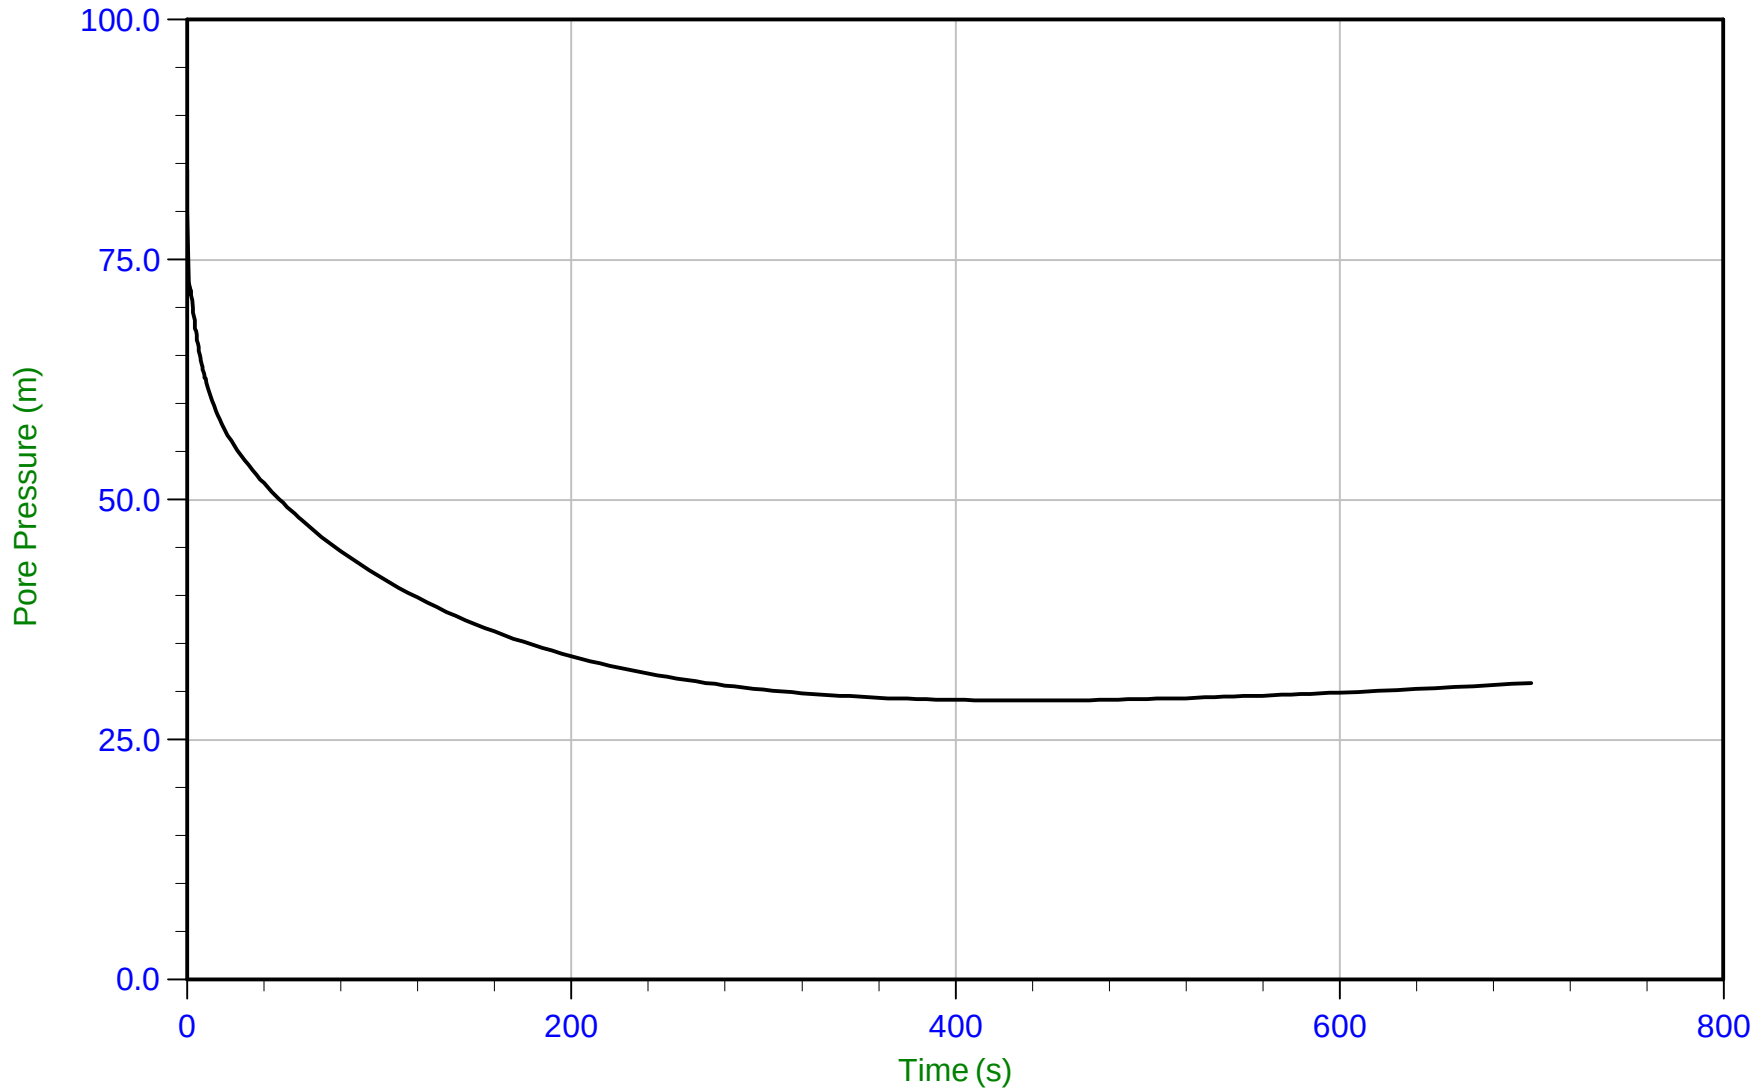

Trace Summary:

Filename: 22-02-23796_RS22-22CPT328.PPF
Depth: 4.875 m / 15.994 ft
Duration: 700.0 s


u Min: 29.1 m
u Max: 84.4 m
u Final: 30.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/09/2022 12:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT329
Cone: 854:T1500F15U35 Area=15 cm²

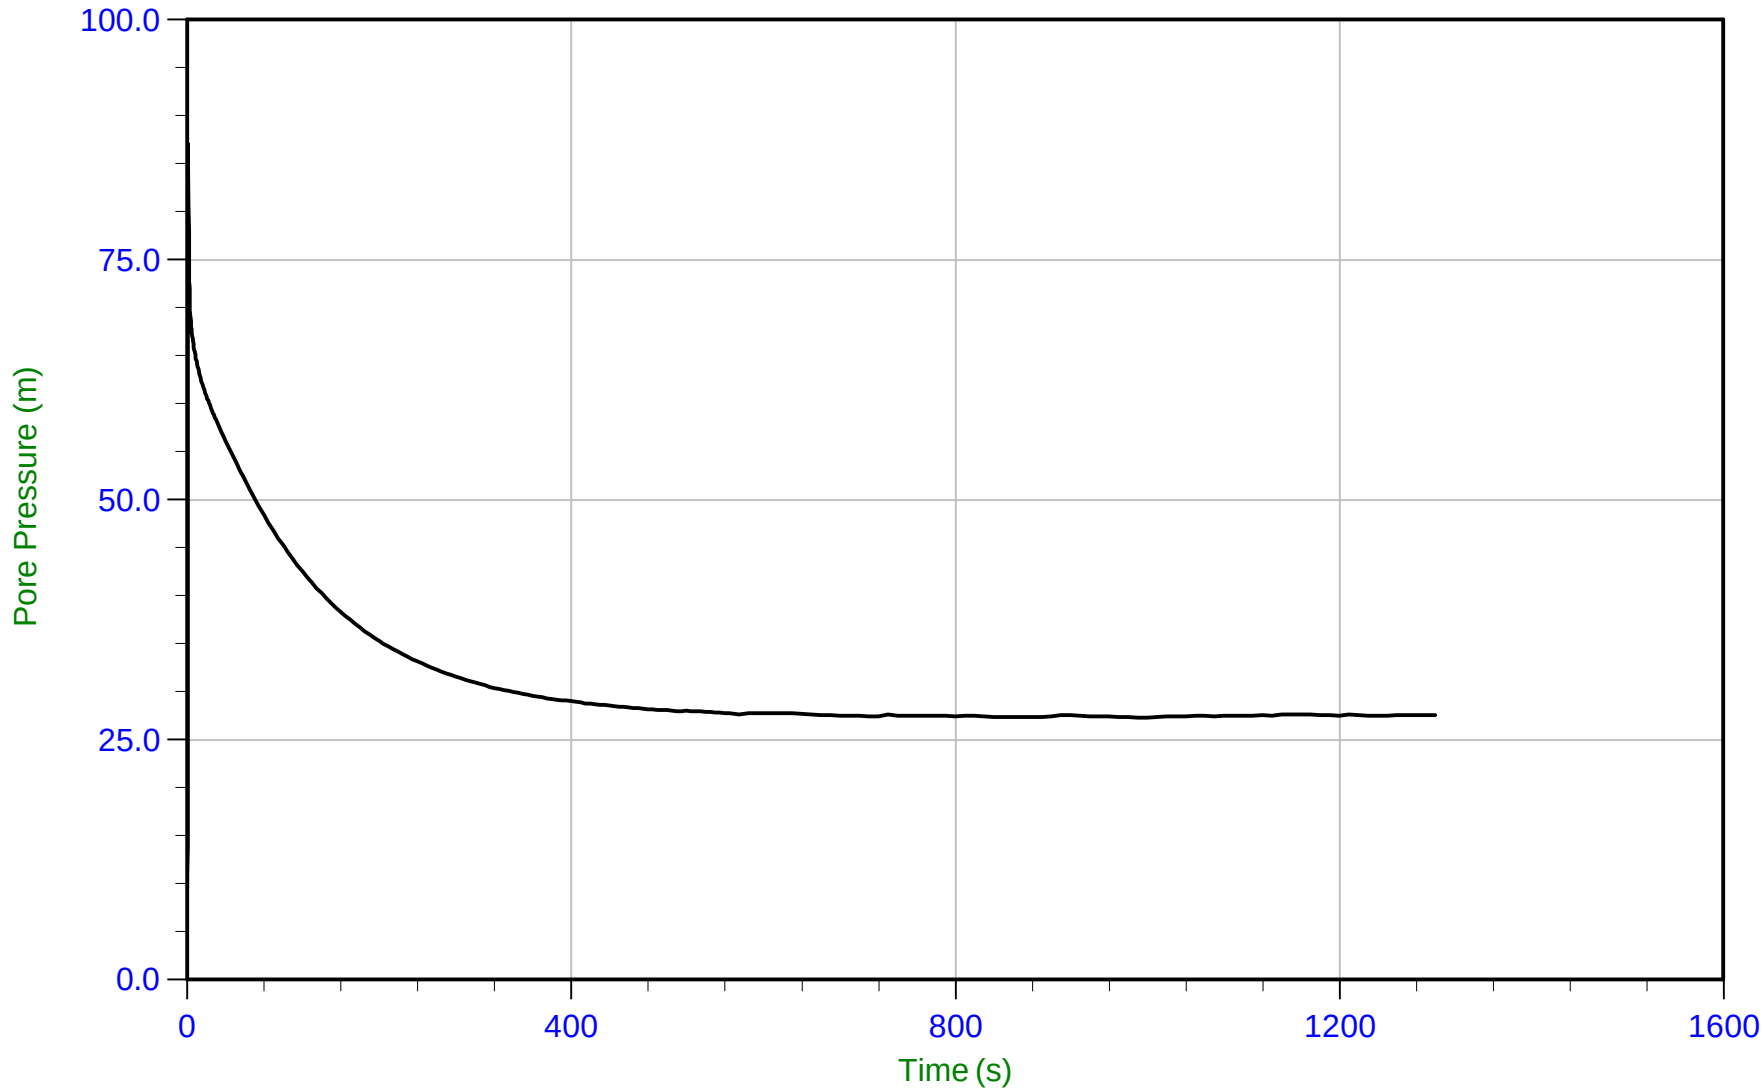

Trace Summary:

Filename: 22-02-23796_RP22-22CPT329.PPF
Depth: 3.750 m / 12.303 ft
Duration: 1300.0 s


u Min: 9.5 m
u Max: 87.1 m
u Final: 27.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/09/2022 14:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT330
Cone: 854:T1500F15U35 Area=15 cm²

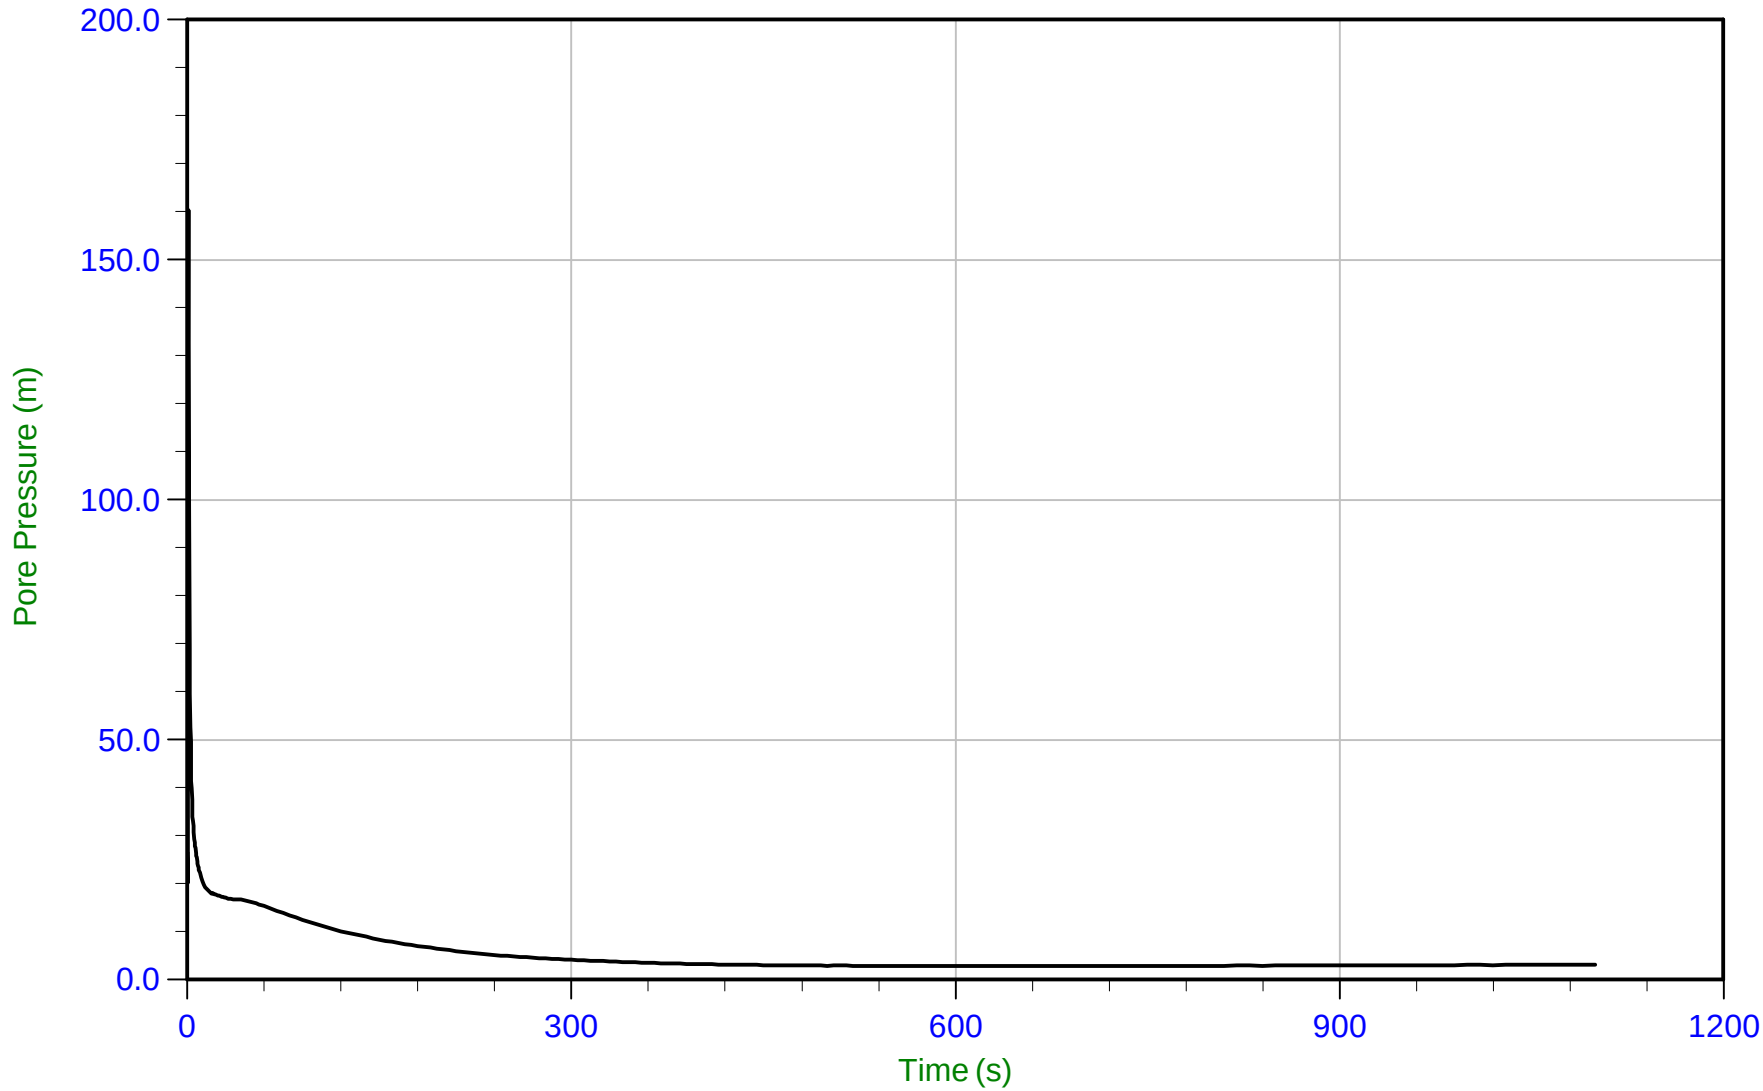

Trace Summary:

Filename: 22-02-23796_RP22-22CPT330.PPF
Depth: 4.750 m / 15.584 ft
Duration: 1100.0 s

u Min: 2.8 m
u Max: 160.4 m
u Final: 3.1 m


WT: 1.650 m / 5.413 ft
Ueq: 3.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/09/2022 16:31
Site: Brooks, Alberta

Sounding: RCPT22-22CPT331
Cone: 854:T1500F15U35 Area=15 cm²

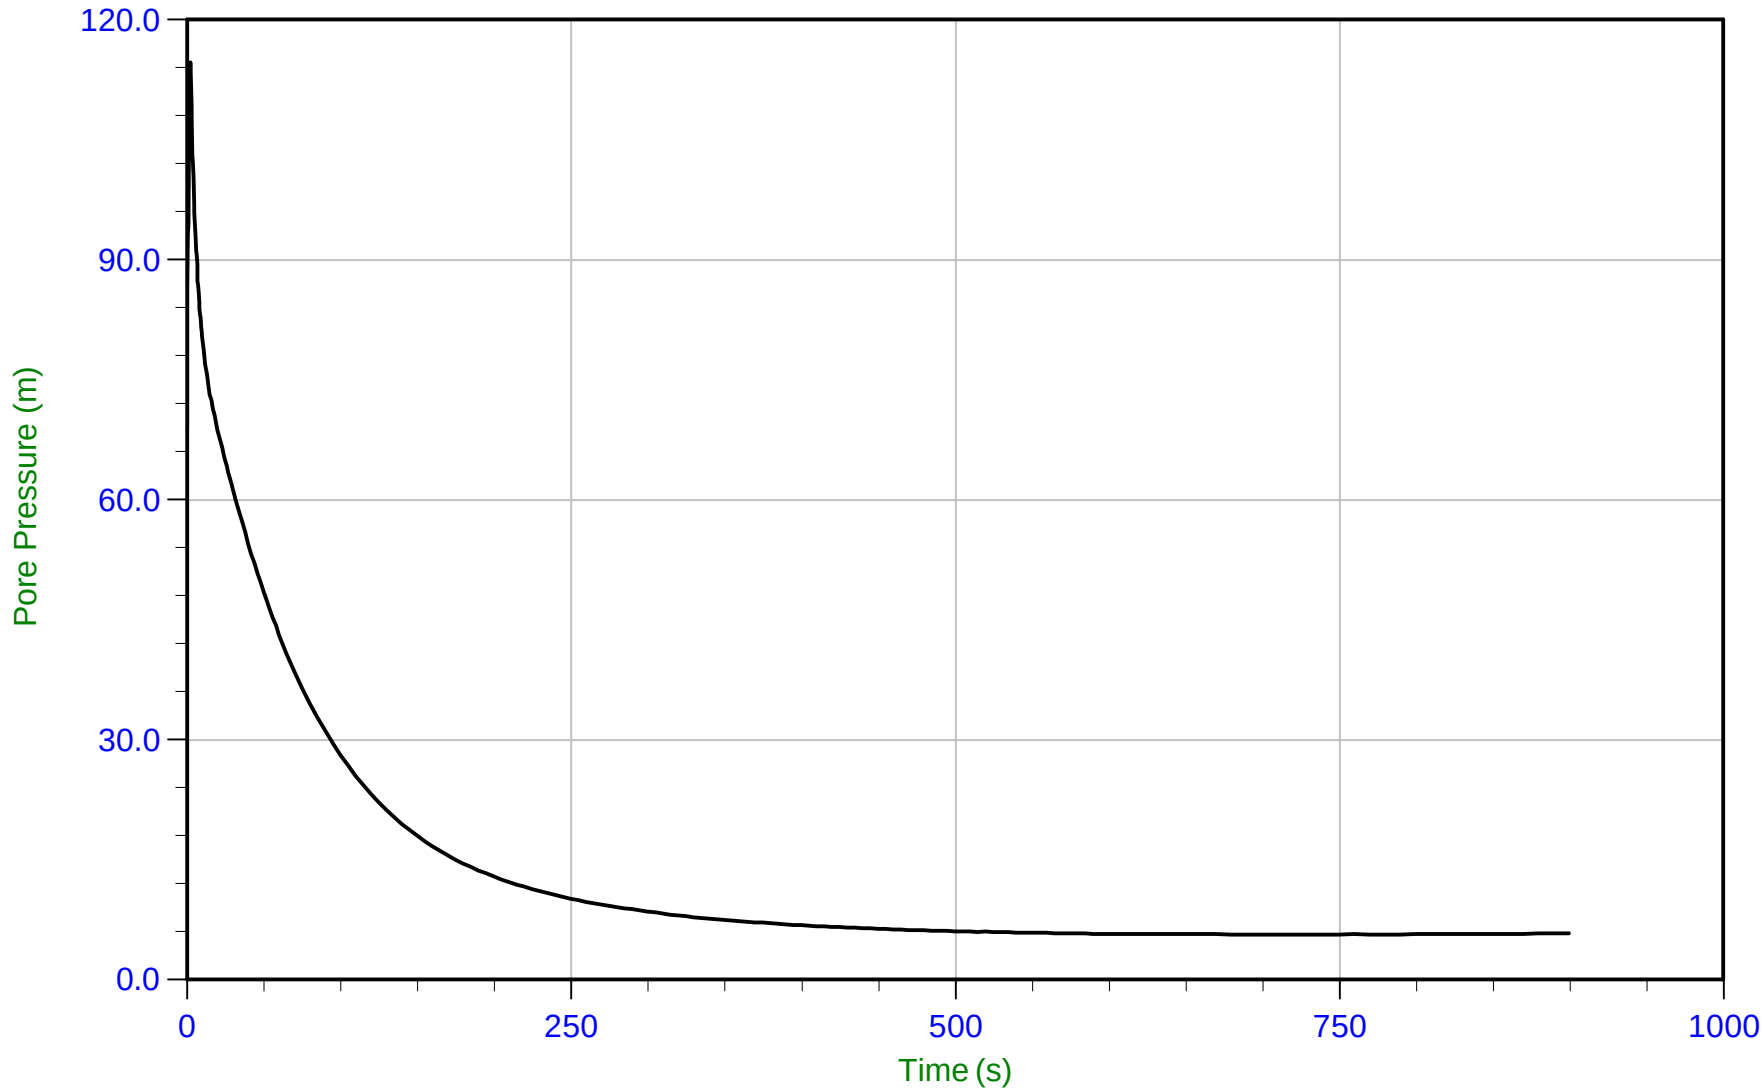

Trace Summary:

Filename: 22-02-23796_RP22-22CPT331.PPF
Depth: 6.875 m / 22.556 ft
Duration: 900.0 s

u Min: 5.6 m
u Max: 114.7 m
u Final: 5.8 m


WT: 1.075 m / 3.527 ft
Ueq: 5.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/11/2022 07:02
Site: Brooks, Alberta

Sounding: RCPT22-22CPT332
Cone: 854:T1500F15U35 Area=15 cm²

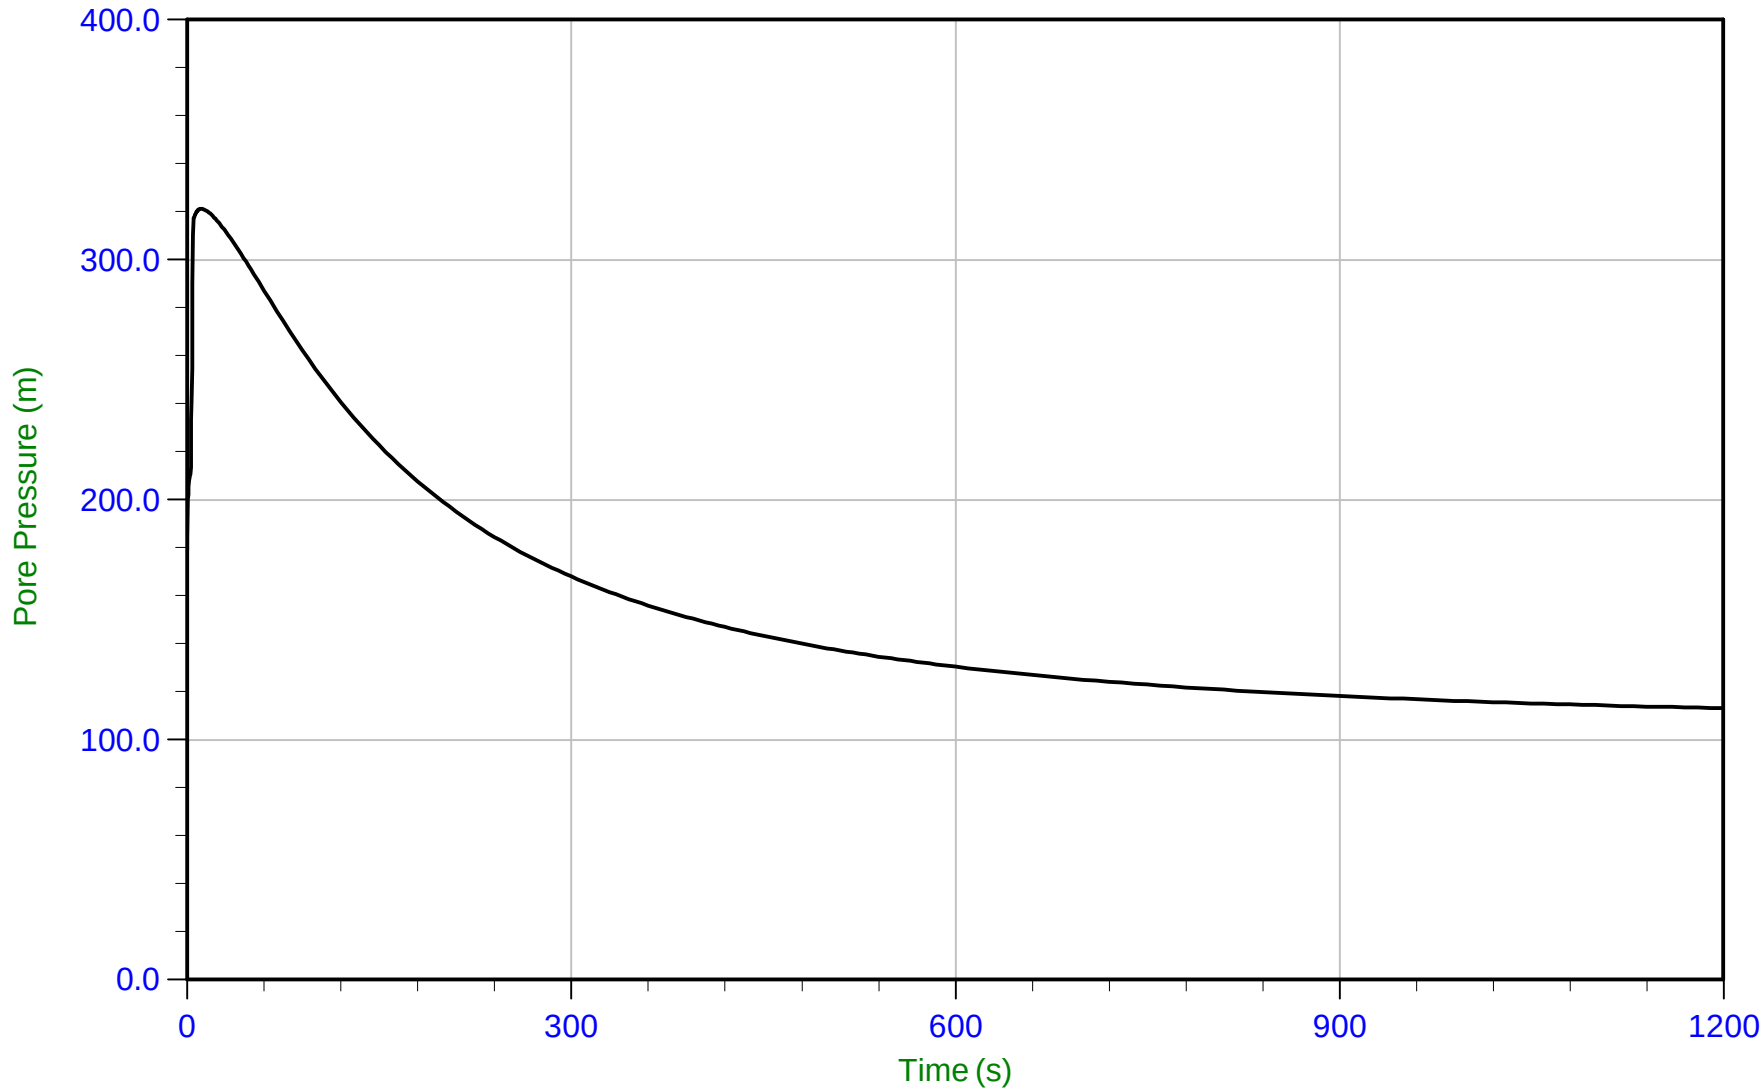

Trace Summary:

Filename: 22-02-23796_RP22-22CPT332.PPF
Depth: 7.325 m / 24.032 ft
Duration: 1200.0 s


u Min: 113.1 m
u Max: 321.2 m
u Final: 113.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/11/2022 10:10
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT334
Cone: 750:T1500F15U35 Area=15 cm²

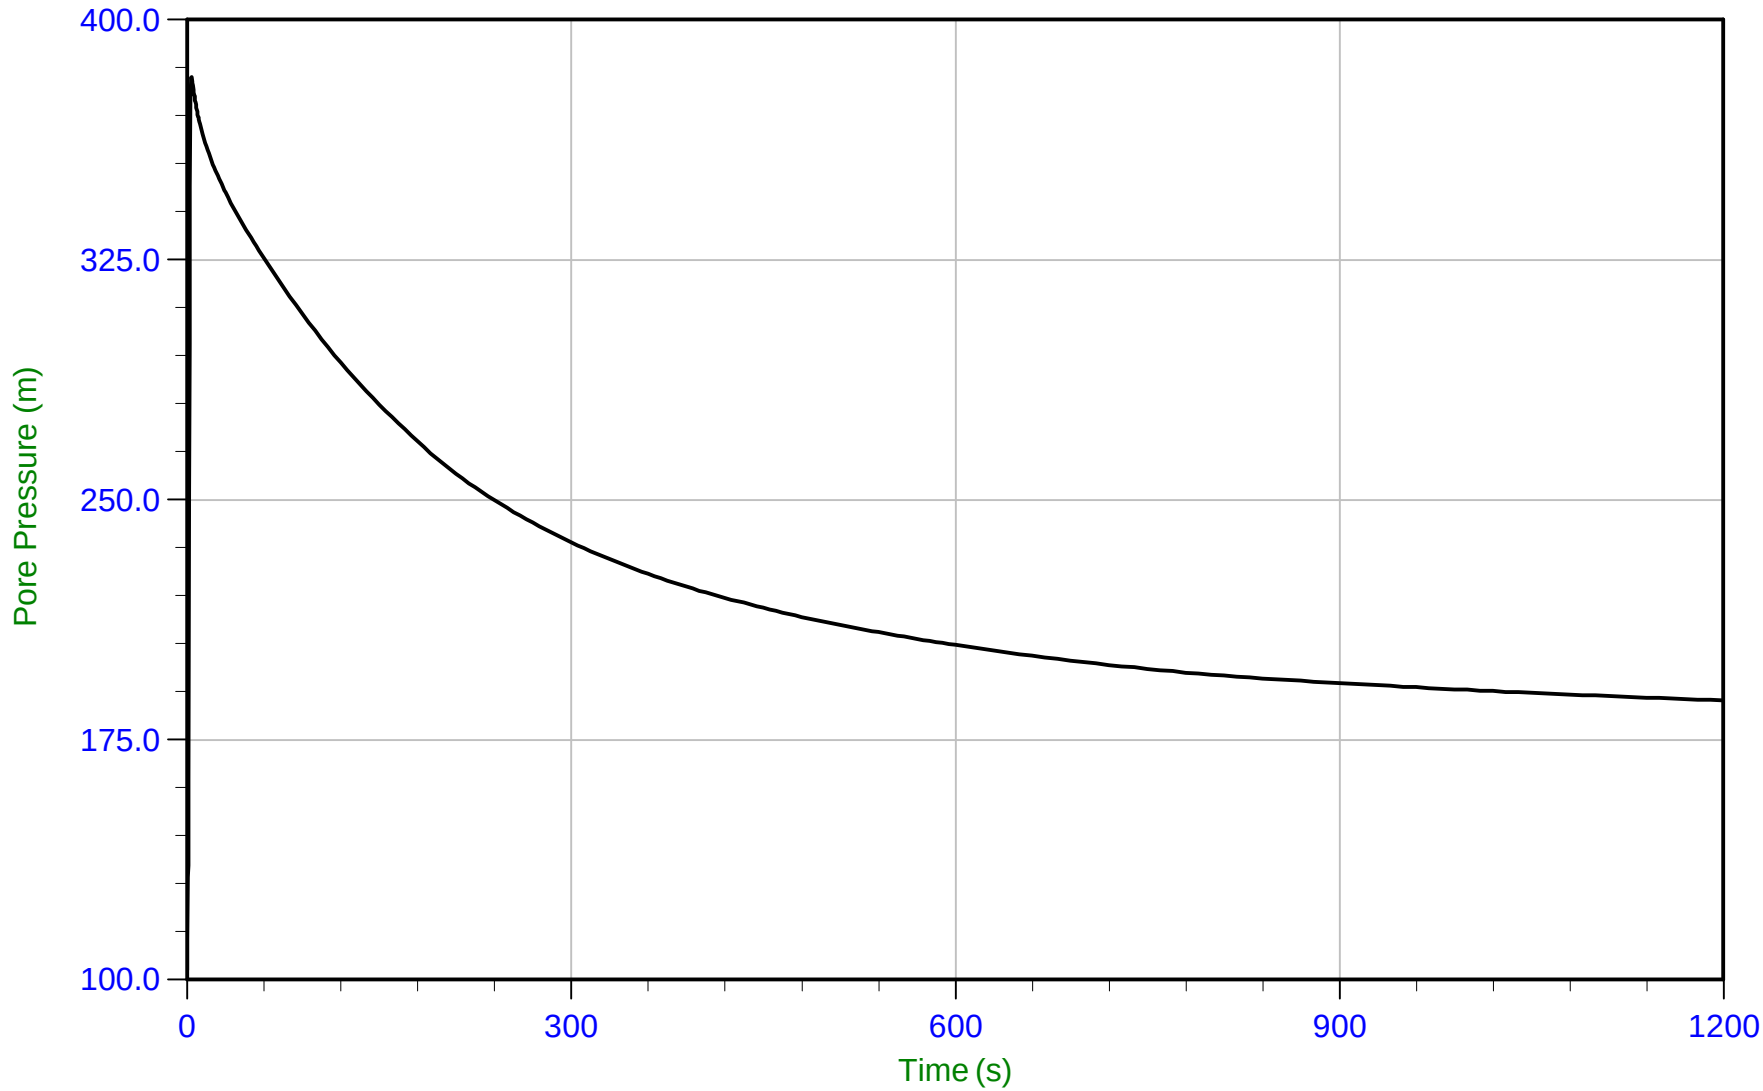

Trace Summary:

Filename: 22-02-23796_RS22-22CPT334.PPF
Depth: 6.325 m / 20.751 ft
Duration: 1200.0 s


u Min: 103.2 m
u Max: 382.0 m
u Final: 187.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/11/2022 13:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT335B
Cone: 821:T1000F10U35 Area=15 cm²

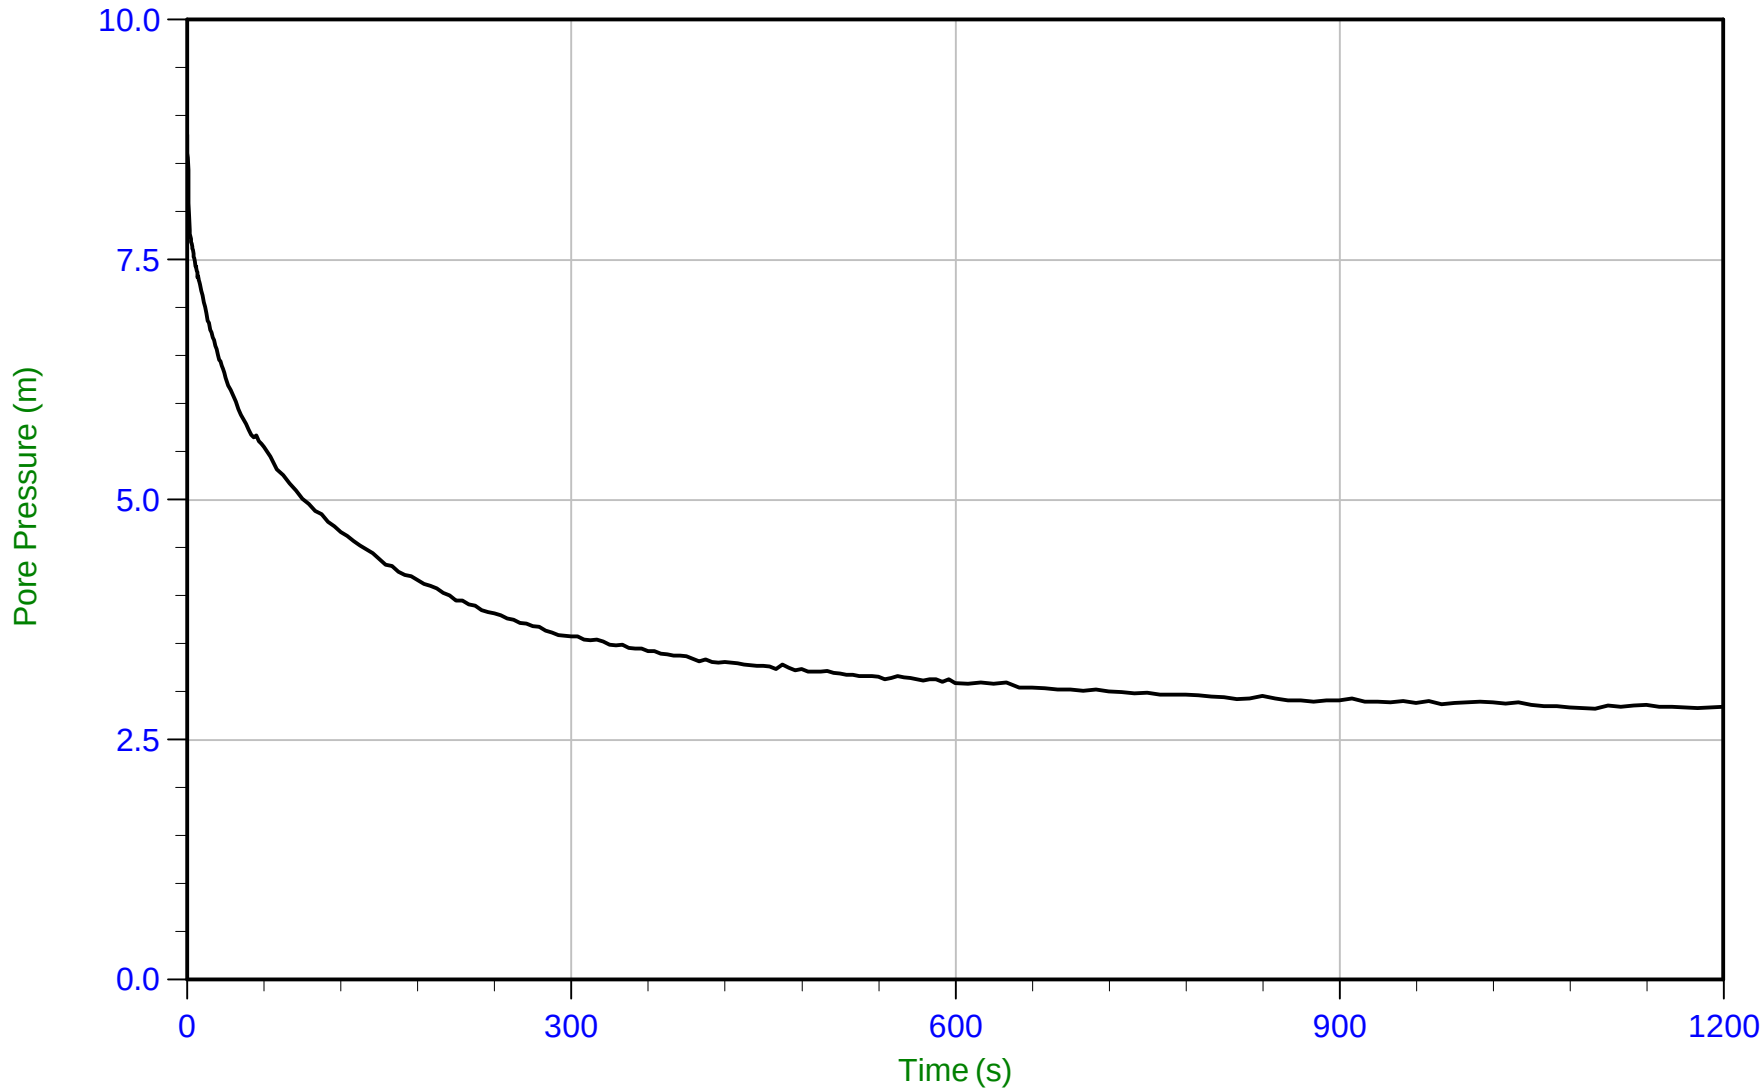

Trace Summary:

Filename: 22-02-23796_RP22-22CPT335B.PPF
Depth: 7.850 m / 25.754 ft
Duration: 1200.0 s


u Min: 2.8 m
u Max: 8.8 m
u Final: 2.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/11/2022 14:33
Site: Brooks, Alberta

Sounding: RCPT22-22CPT336
Cone: 821:T1000F10U35 Area=15 cm²

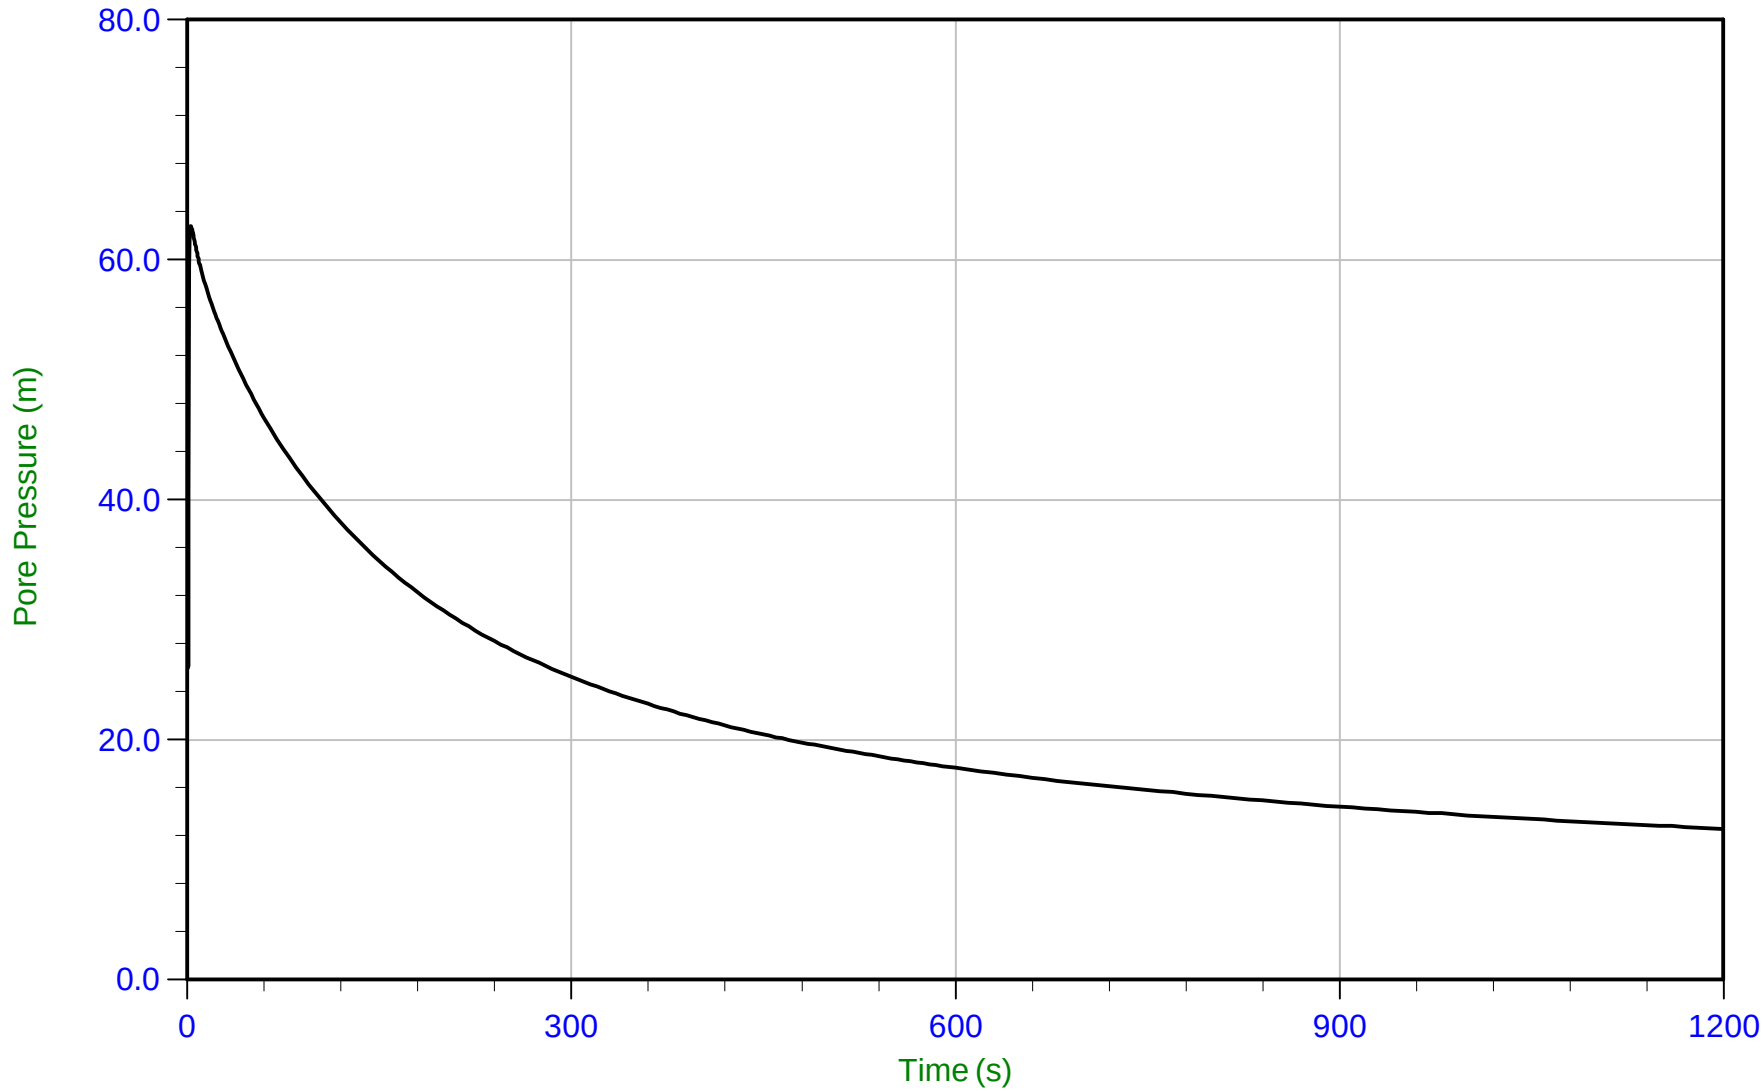

Trace Summary:

Filename: 22-02-23796_RP22-22CPT336.PPF
Depth: 4.925 m / 16.158 ft
Duration: 1200.0 s


u Min: 12.6 m
u Max: 62.8 m
u Final: 12.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/11/2022 16:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT337
Cone: 821:T1000F10U35 Area=15 cm²

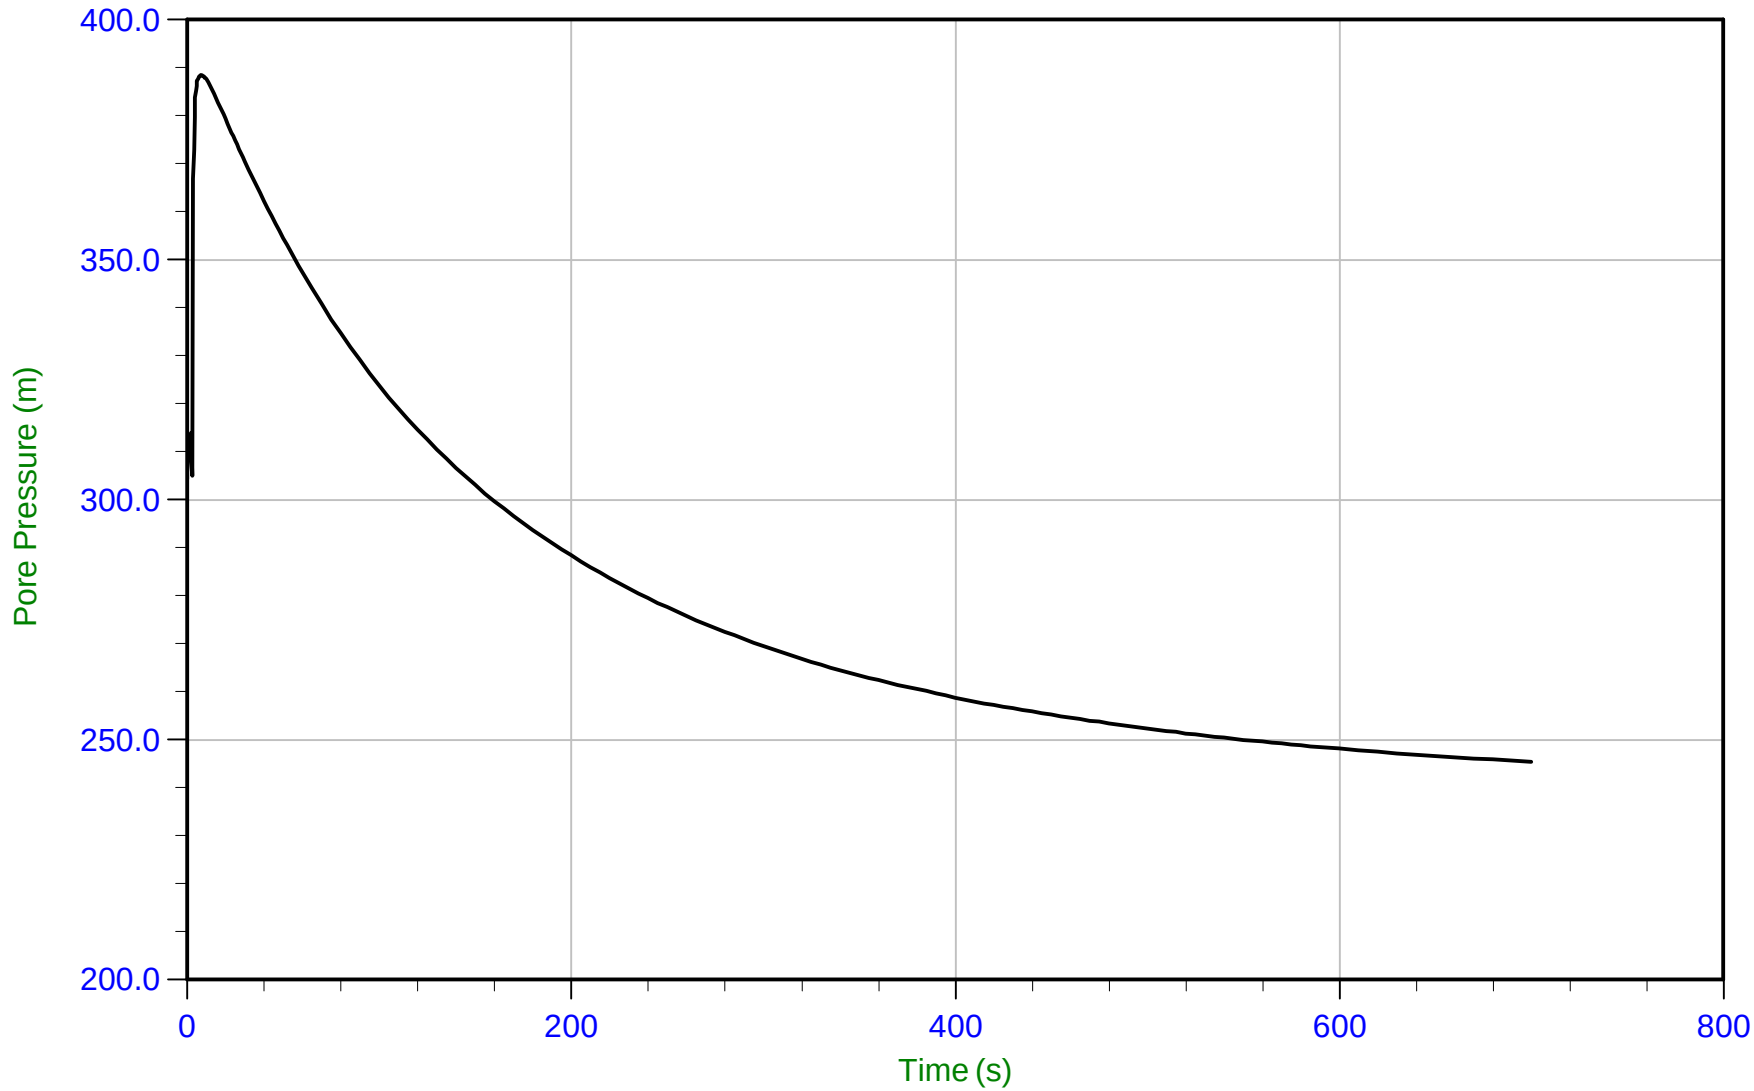

Trace Summary:

Filename: 22-02-23796_RP22-22CPT337.PPF
Depth: 6.850 m / 22.473 ft
Duration: 700.0 s


u Min: 245.4 m
u Max: 388.4 m
u Final: 245.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/11/2022 16:44
Site: Brooks, Alberta

Sounding: RCPT22-22CPT337
Cone: 821:T1000F10U35 Area=15 cm²

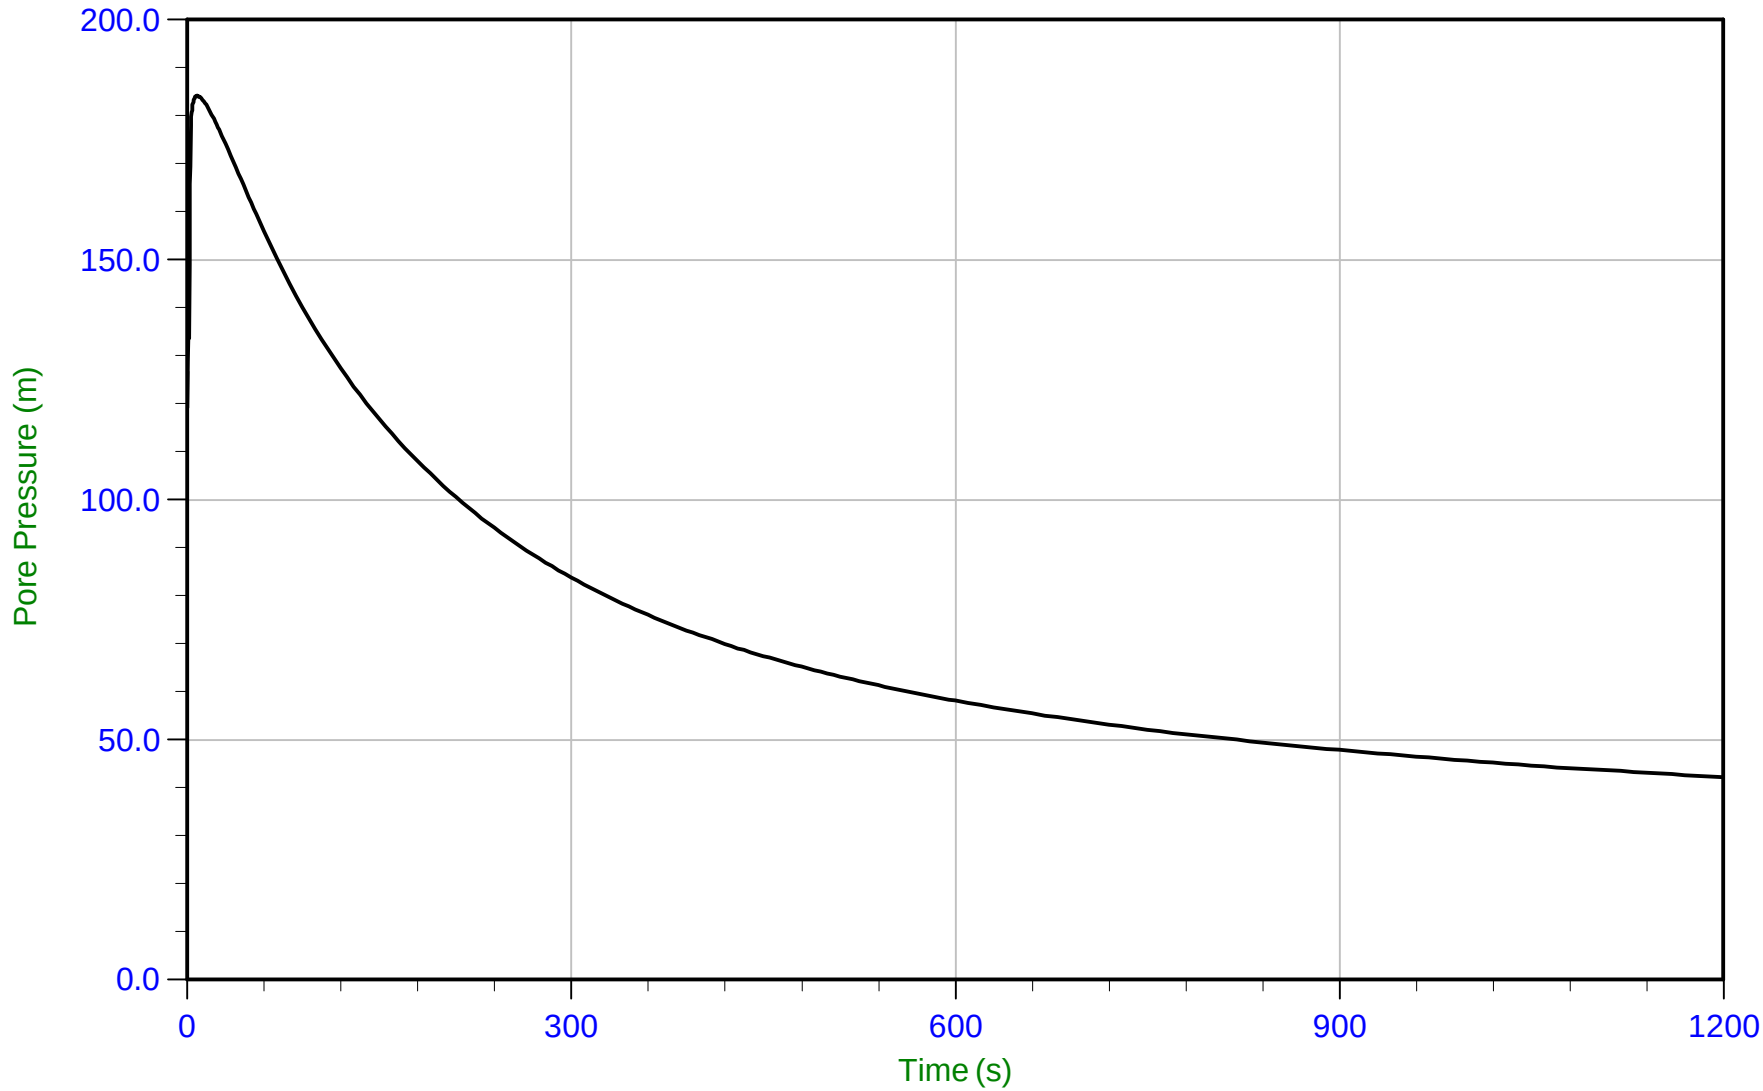

Trace Summary:

Filename: 22-02-23796_RP22-22CPT337.PPF
Depth: 8.225 m / 26.985 ft
Duration: 1200.0 s


u Min: 42.2 m
u Max: 184.2 m
u Final: 42.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/12/2022 08:45
Site: Brooks, Alberta

Sounding: RSCPT22-22CPT339
Cone: 821:T1000F10U35 Area=15 cm²

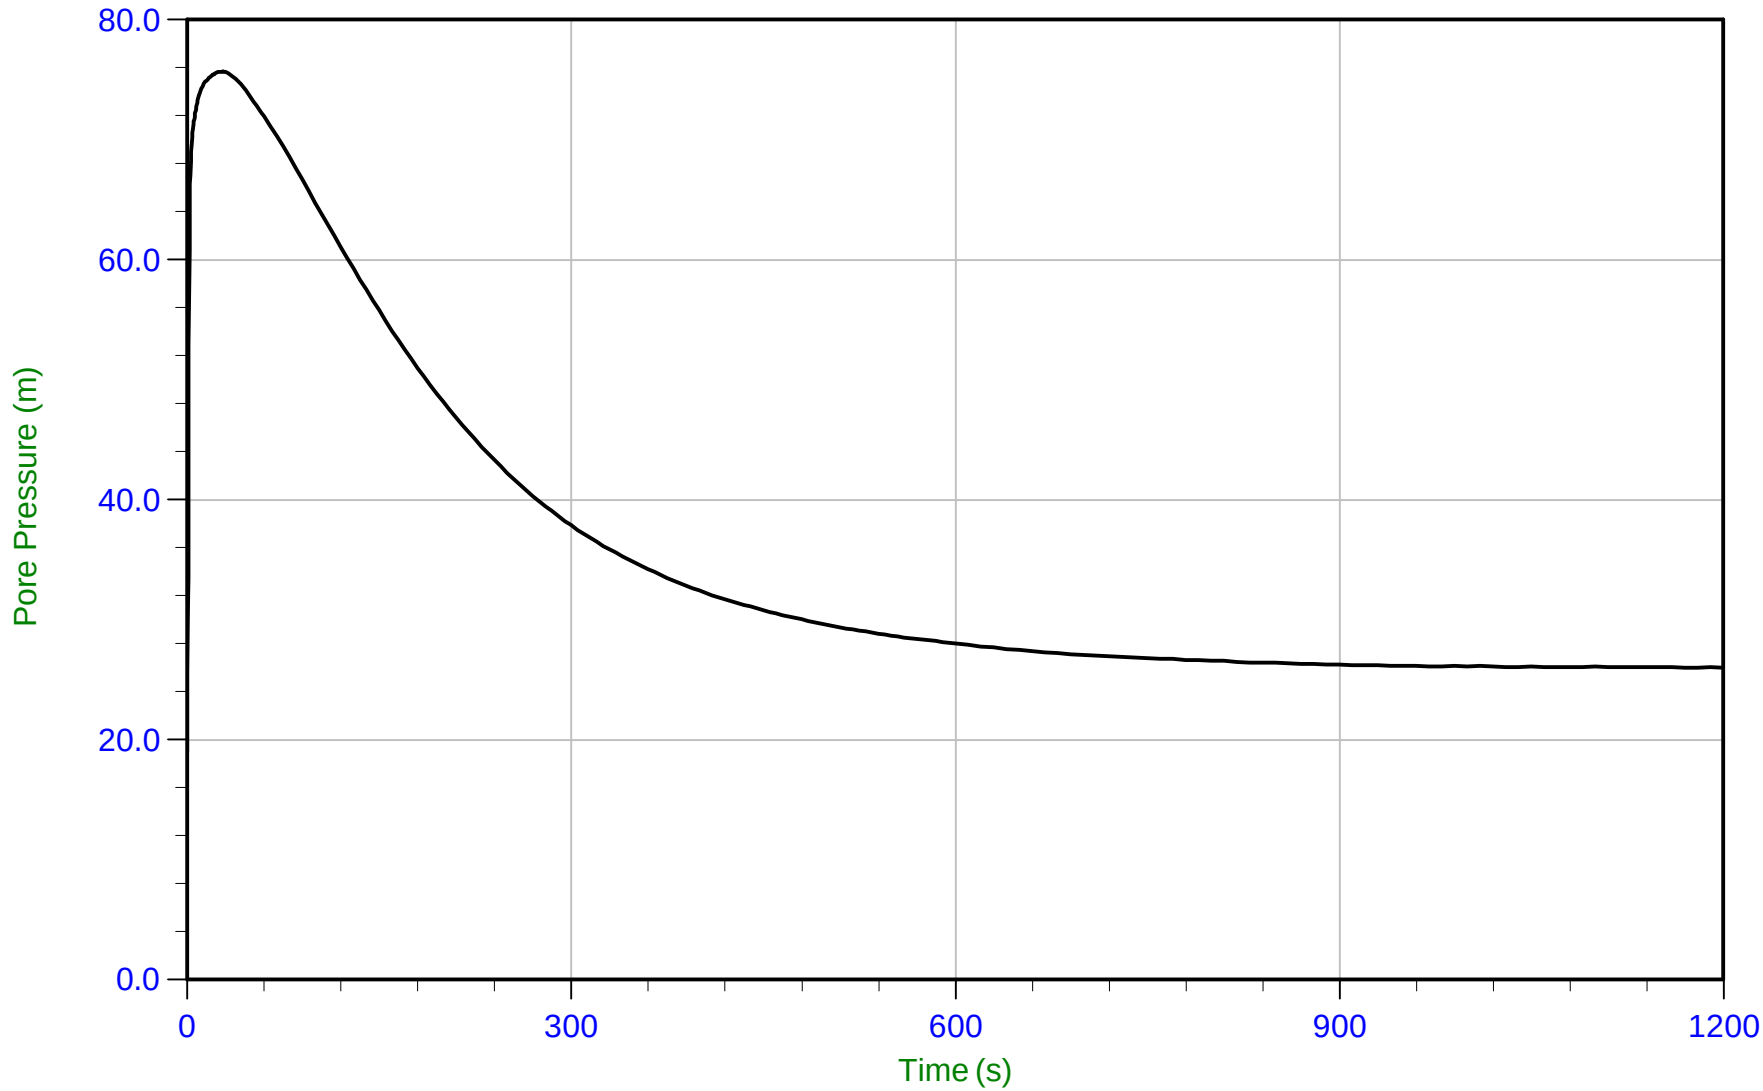

Trace Summary:

Filename: 22-02-23796_RS22-22CPT339.PPF
Depth: 7.850 m / 25.754 ft
Duration: 1200.0 s


u Min: 19.0 m
u Max: 75.7 m
u Final: 26.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/05/2022 06:47
Site: Brooks, Alberta

Sounding: RCPT22-22CPT340
Cone: 854:T1500F15U35 Area=15 cm²

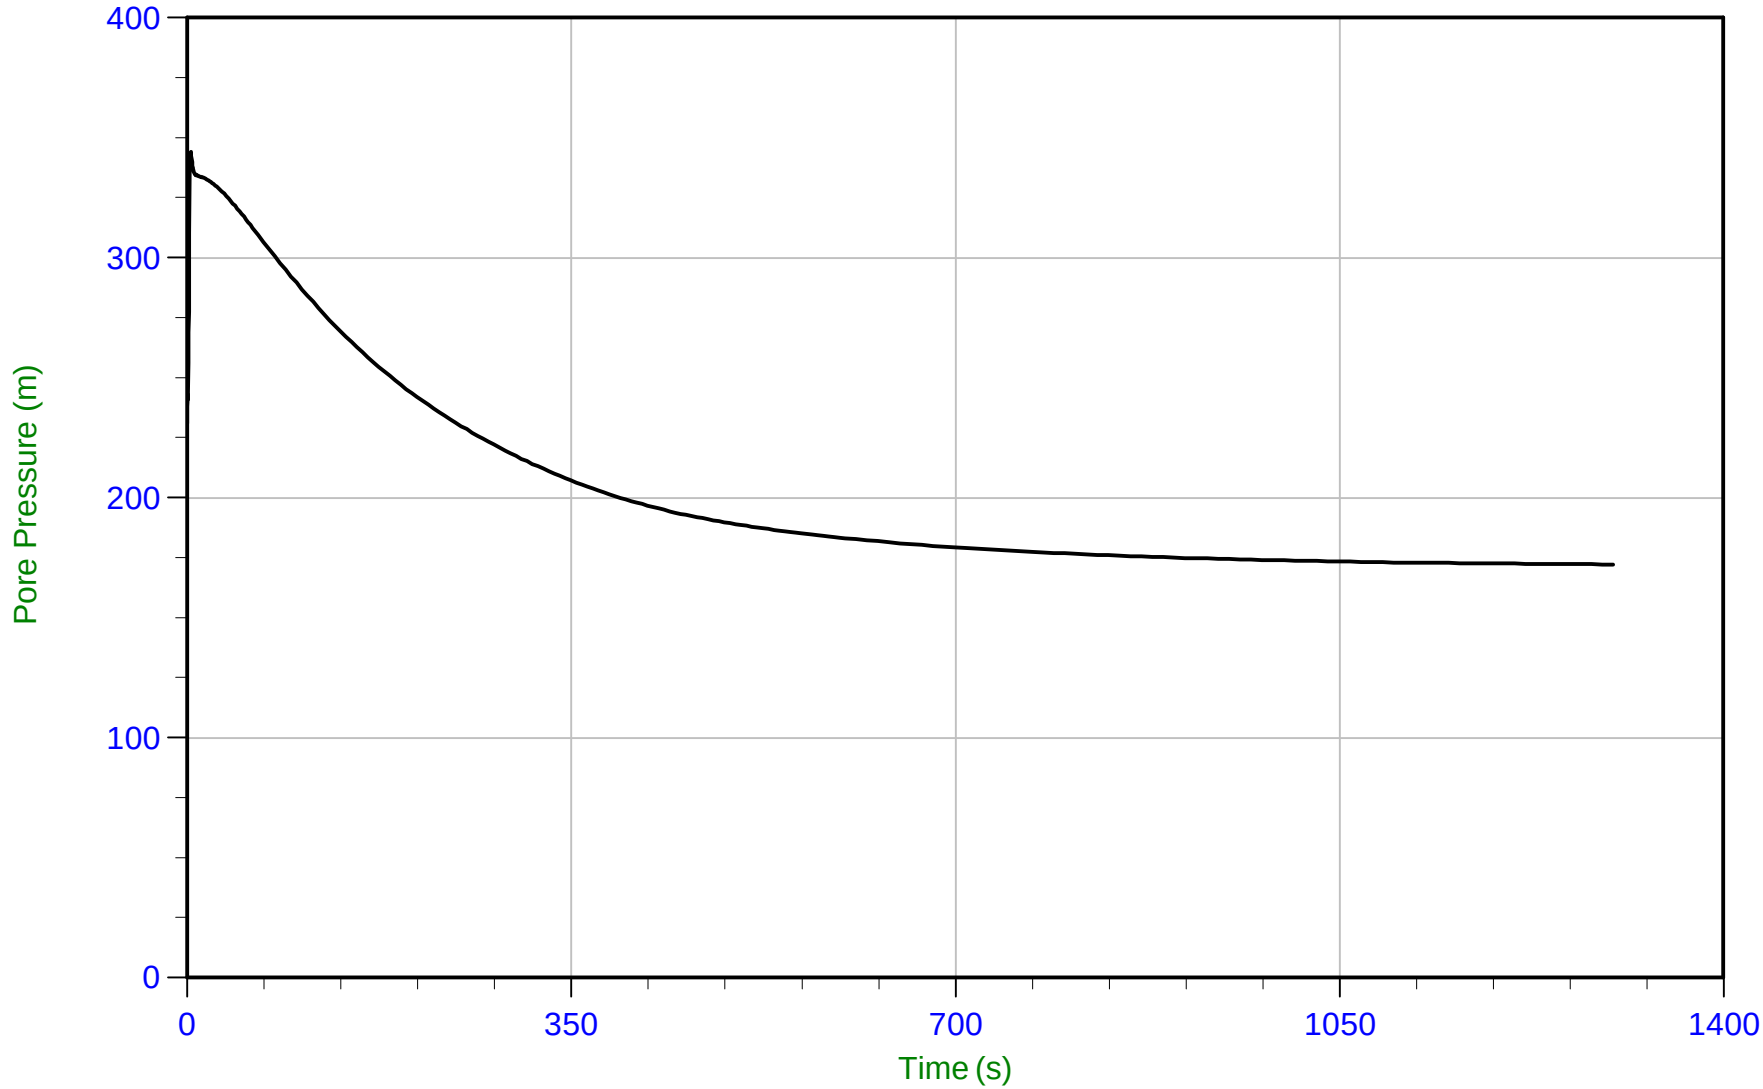

Trace Summary:

Filename: 22-02-23796_RP22-22CPT340.PPF
Depth: 9.700 m / 31.824 ft
Duration: 1300.0 s


u Min: 172.2 m
u Max: 344.1 m
u Final: 172.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/05/2022 09:08
Site: Brooks, Alberta

Sounding: RCPT22-22CPT341
Cone: 854:T1500F15U35 Area=15 cm²

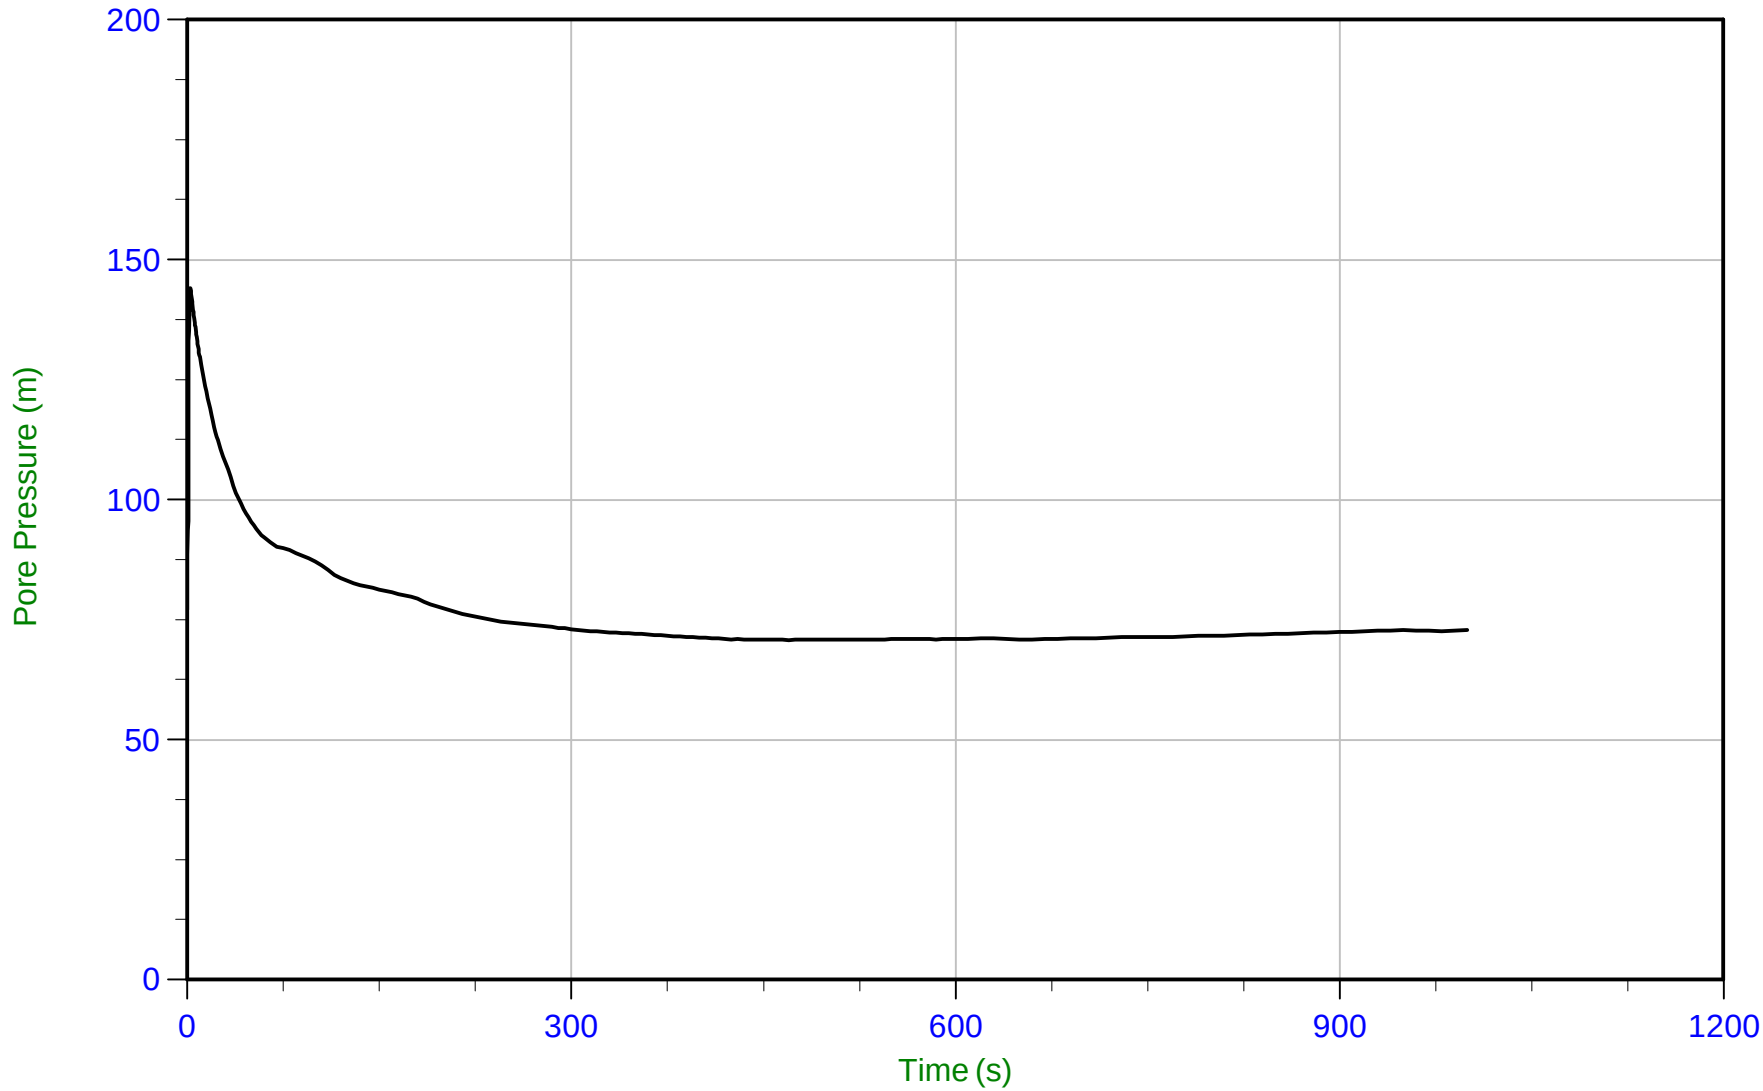

Trace Summary:

Filename: 22-02-23796_RP22-22CPT341.PPF
Depth: 5.750 m / 18.865 ft
Duration: 1000.0 s


u Min: 70.8 m
u Max: 144.1 m
u Final: 72.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/05/2022 15:11
Site: Brooks, Alberta

Sounding: RCPT22-22CPT343
Cone: 854:T1500F15U35 Area=15 cm²

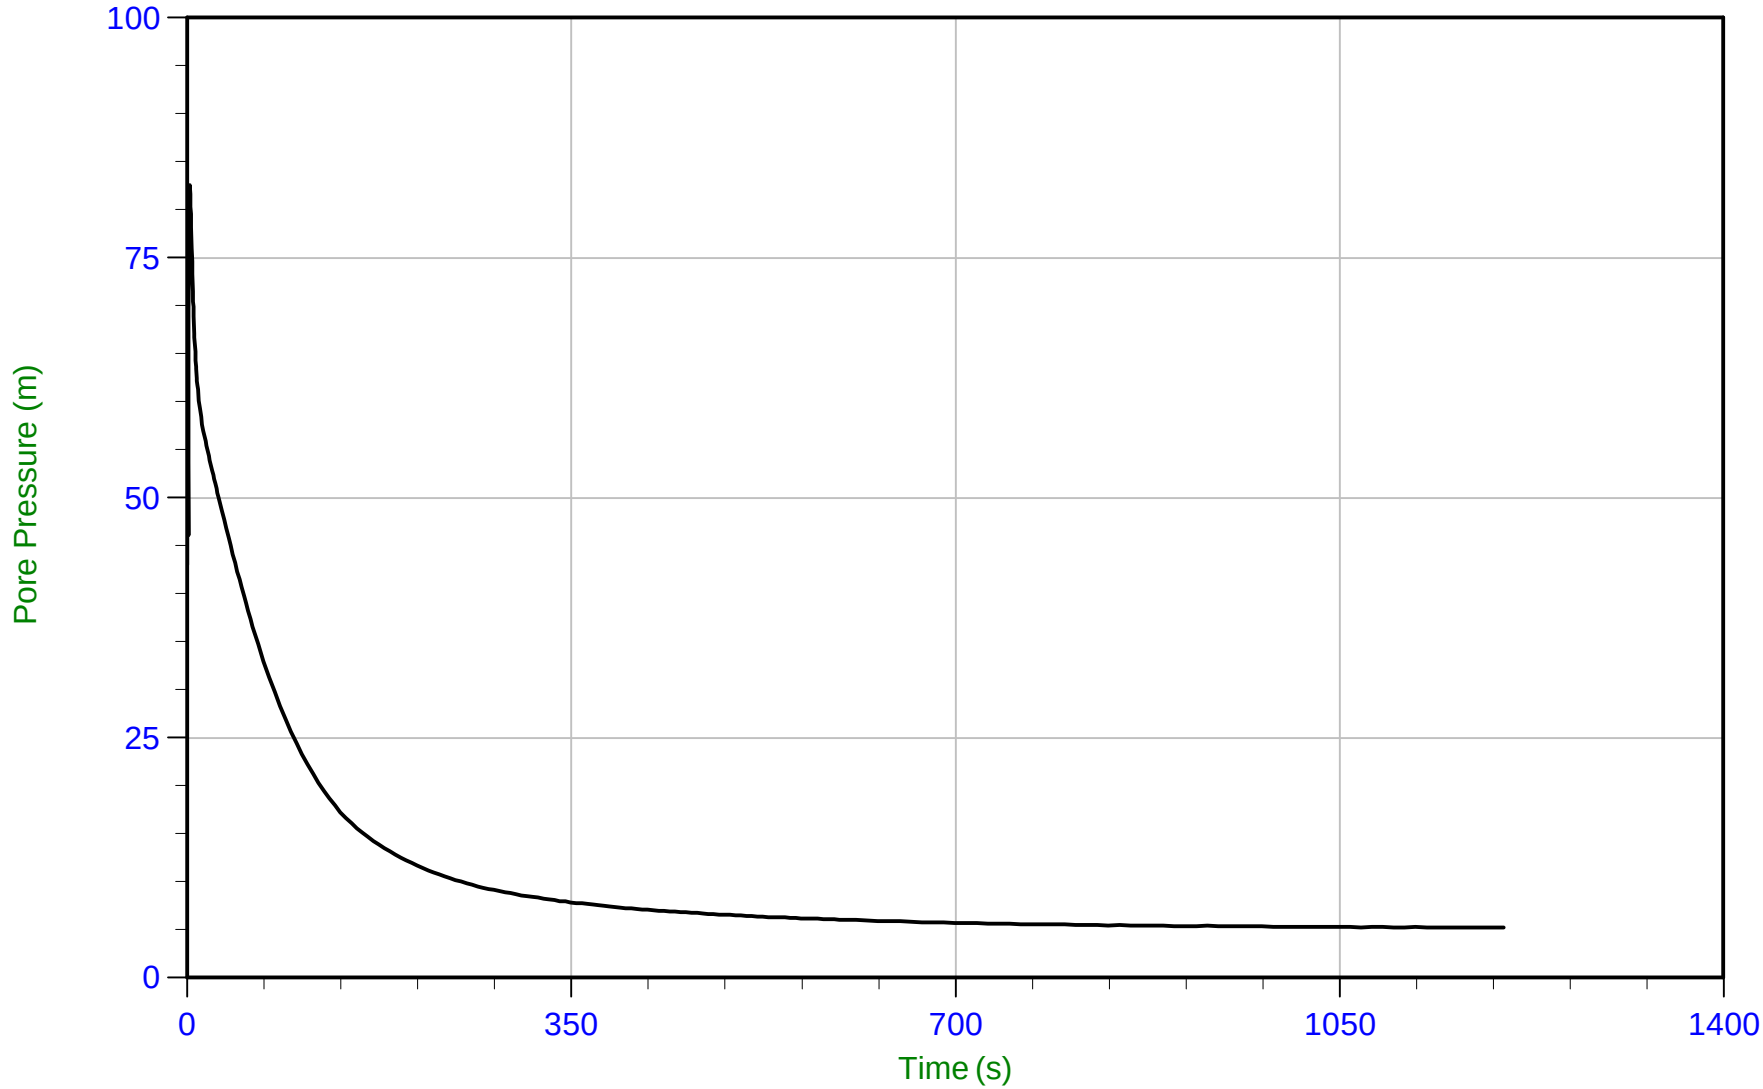

Trace Summary:

Filename: 22-02-23796_RP22-22CPT343.PPF
Depth: 7.900 m / 25.918 ft
Duration: 1200.0 s

u Min: 5.2 m
u Max: 82.6 m
u Final: 5.2 m

WT: 2.700 m / 8.858 ft
Ueq: 5.2 m
U(50): 43.90 m


T(50): 39.8 s
Ir: 100
Ch: 17.6 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/06/2022 08:20
Site: Brooks, Alberta

Sounding: RCPT22-22CPT344
Cone: 854:T1500F15U35 Area=15 cm²

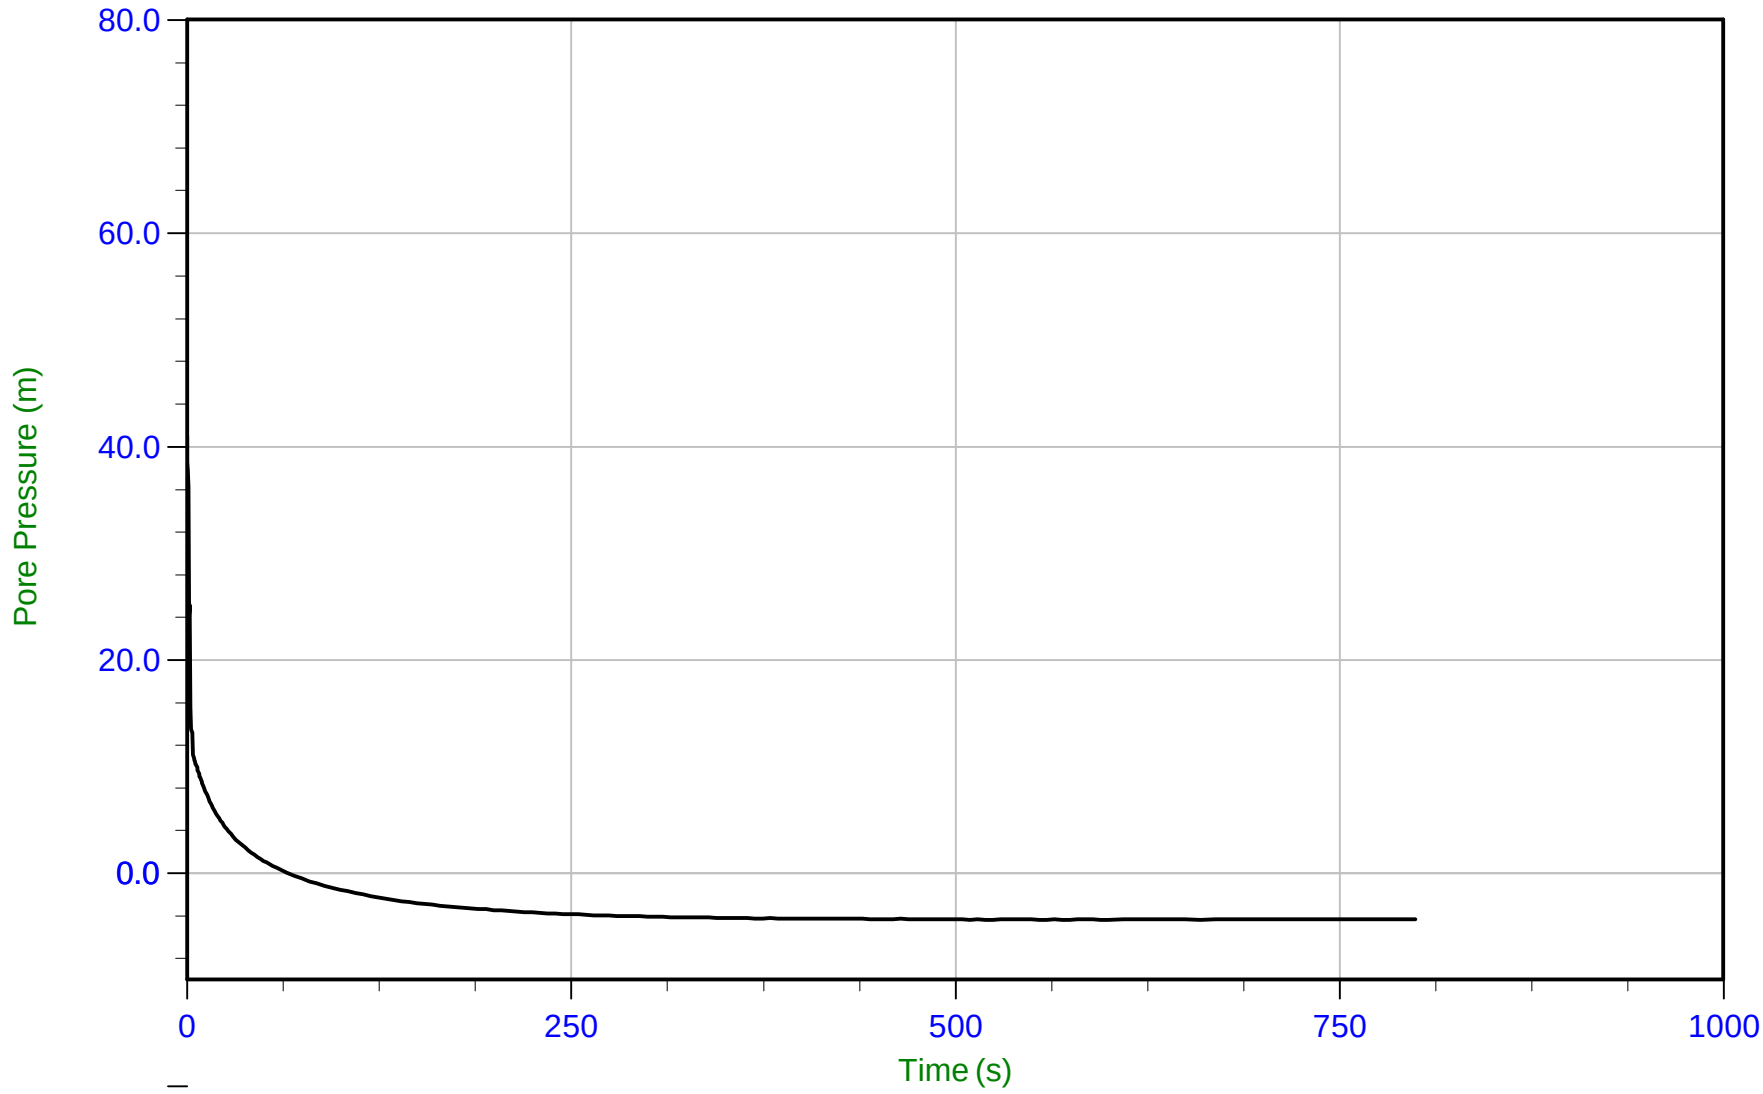

Trace Summary:

Filename: 22-02-23796_RP22-22CPT344.PPF
Depth: 9.125 m / 29.937 ft
Duration: 800.0 s


u Min: -4.4 m
u Max: 41.0 m
u Final: -4.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/06/2022 11:50
Site: Brooks, Alberta

Sounding: RCPT22-22CPT345
Cone: 854:T1500F15U35 Area=15 cm²

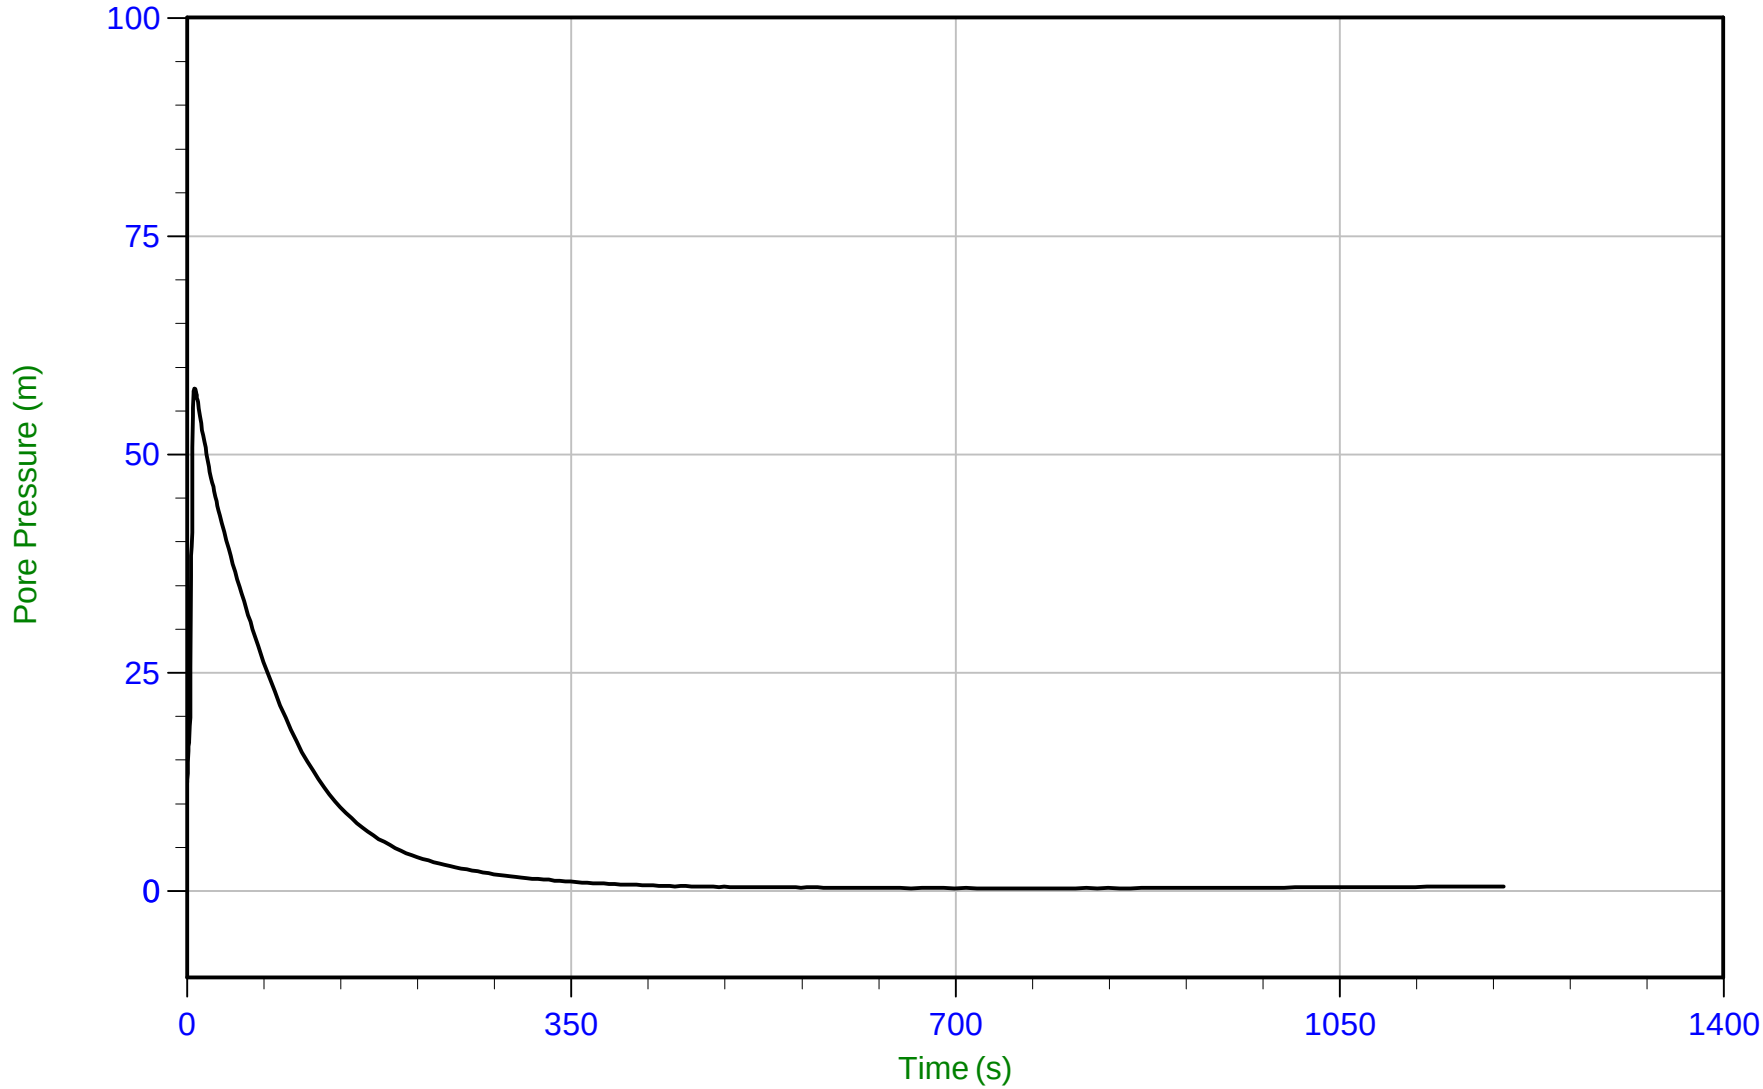

Trace Summary:

Filename: 22-02-23796_RP22-22CPT345.PPF
Depth: 6.825 m / 22.391 ft
Duration: 1200.0 s


u Min: 0.2 m
u Max: 57.5 m
u Final: 0.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/06/2022 14:52
Site: Brooks, Alberta

Sounding: RCPT22-22CPT346
Cone: 854:T1500F15U35 Area=15 cm²

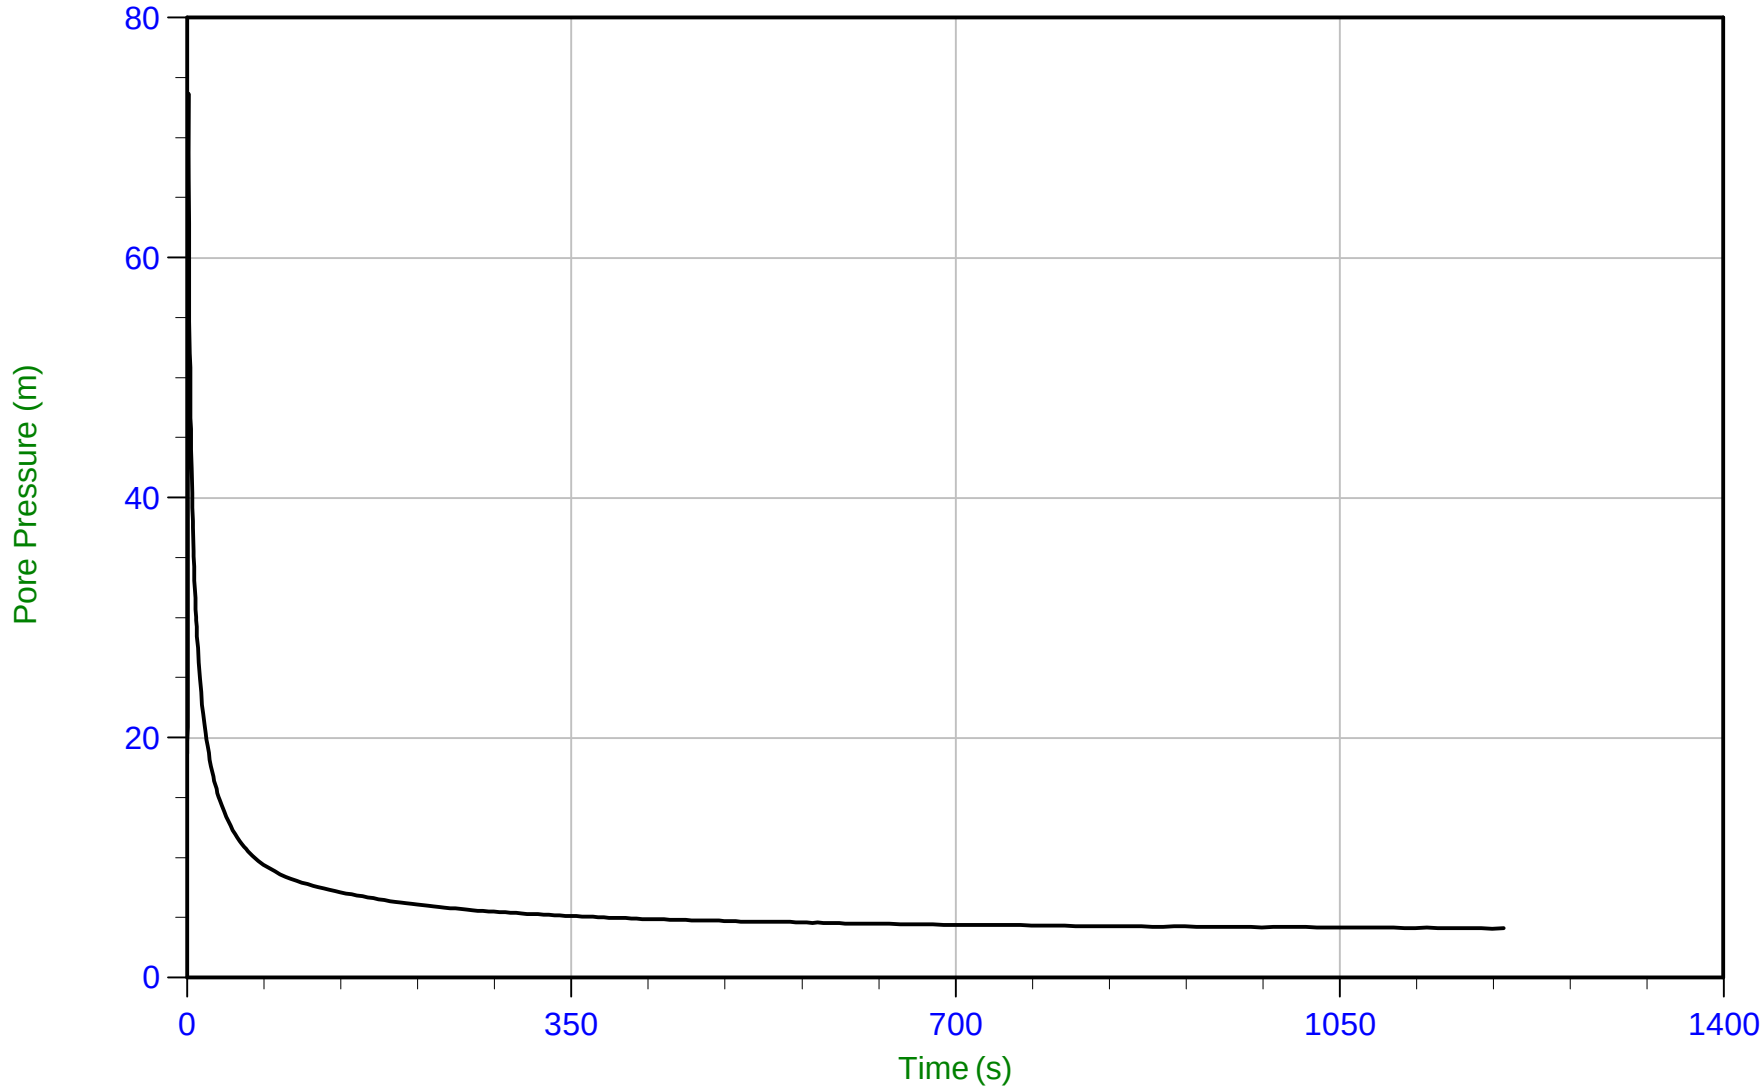

Trace Summary:

Filename: 22-02-23796_RP22-22CPT346.PPF
Depth: 5.800 m / 19.029 ft
Duration: 1200.0 s

u Min: 4.1 m
u Max: 73.7 m
u Final: 4.1 m

WT: 1.700 m / 5.577 ft
Ueq: 4.1 m
U(50): 38.88 m


T(50): 3.8 s
Ir: 100
Ch: 185.7 cm²/min

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/07/2022 07:04
Site: Brooks, Alberta

Sounding: RCPT22-22CPT347
Cone: 854:T1500F15U35 Area=15 cm²

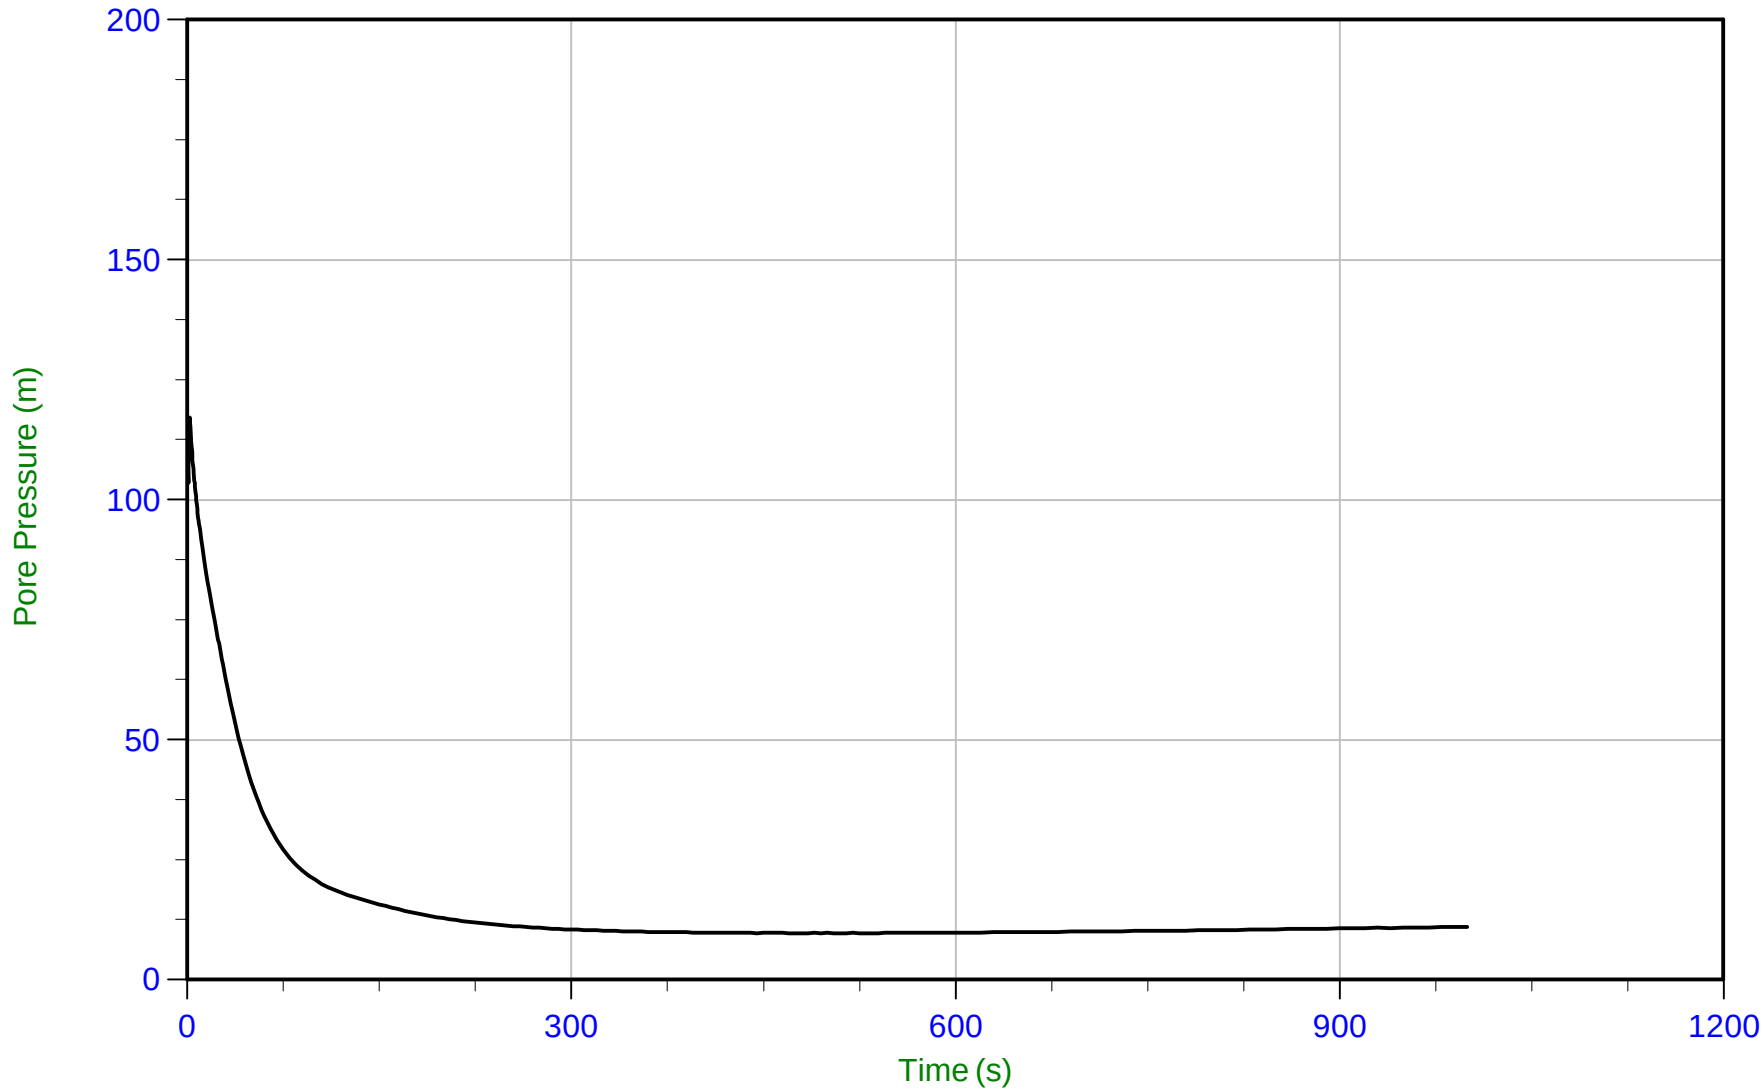

Trace Summary:

Filename: 22-02-23796_RP22-22CPT347.PPF
Depth: 5.850 m / 19.193 ft
Duration: 1000.0 s


u Min: 9.7 m
u Max: 117.1 m
u Final: 11.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/07/2022 11:18
Site: Brooks, Alberta

Sounding: RCPT22-22CPT348
Cone: 854:T1500F15U35 Area=15 cm²

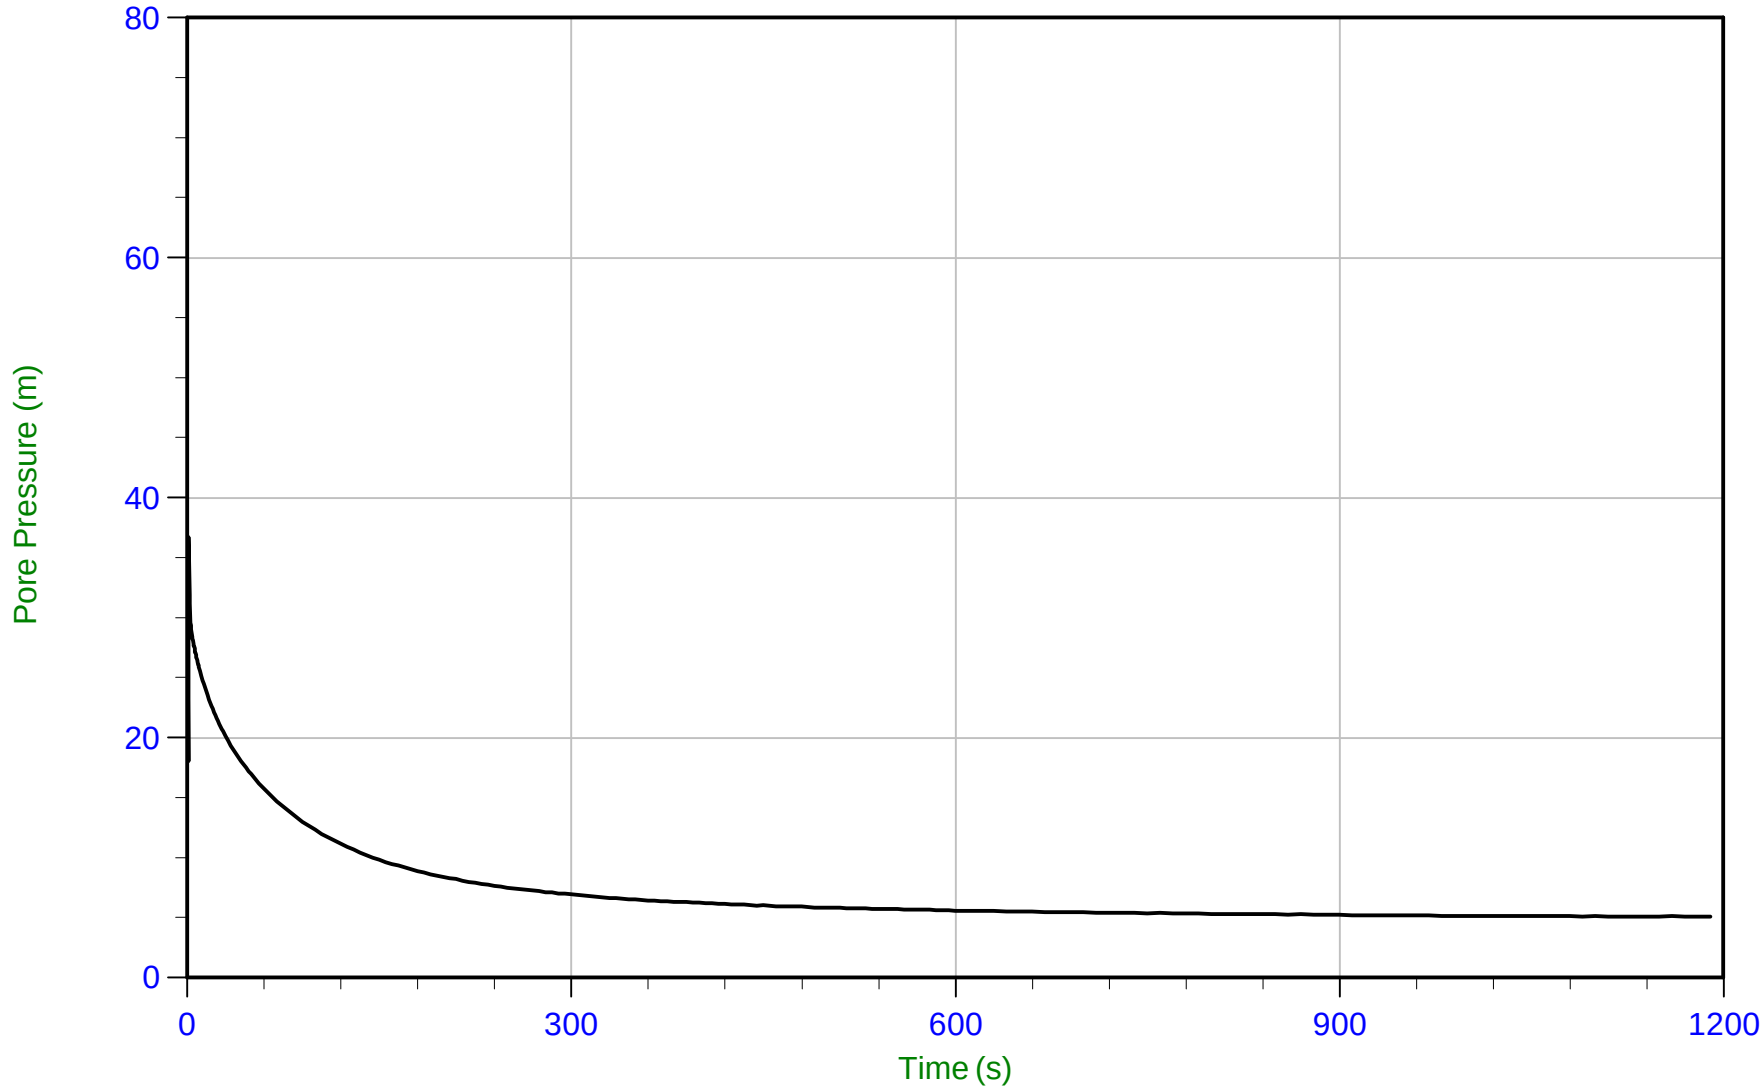

Trace Summary:

Filename: 22-02-23796_RP22-22CPT348.PPF
Depth: 4.825 m / 15.830 ft
Duration: 1190.0 s


u Min: 5.1 m
u Max: 36.7 m
u Final: 5.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/08/2022 09:30
Site: Brooks, Alberta

Sounding: RCPT22-22CPT351
Cone: 854:T1500F15U35 Area=15 cm²

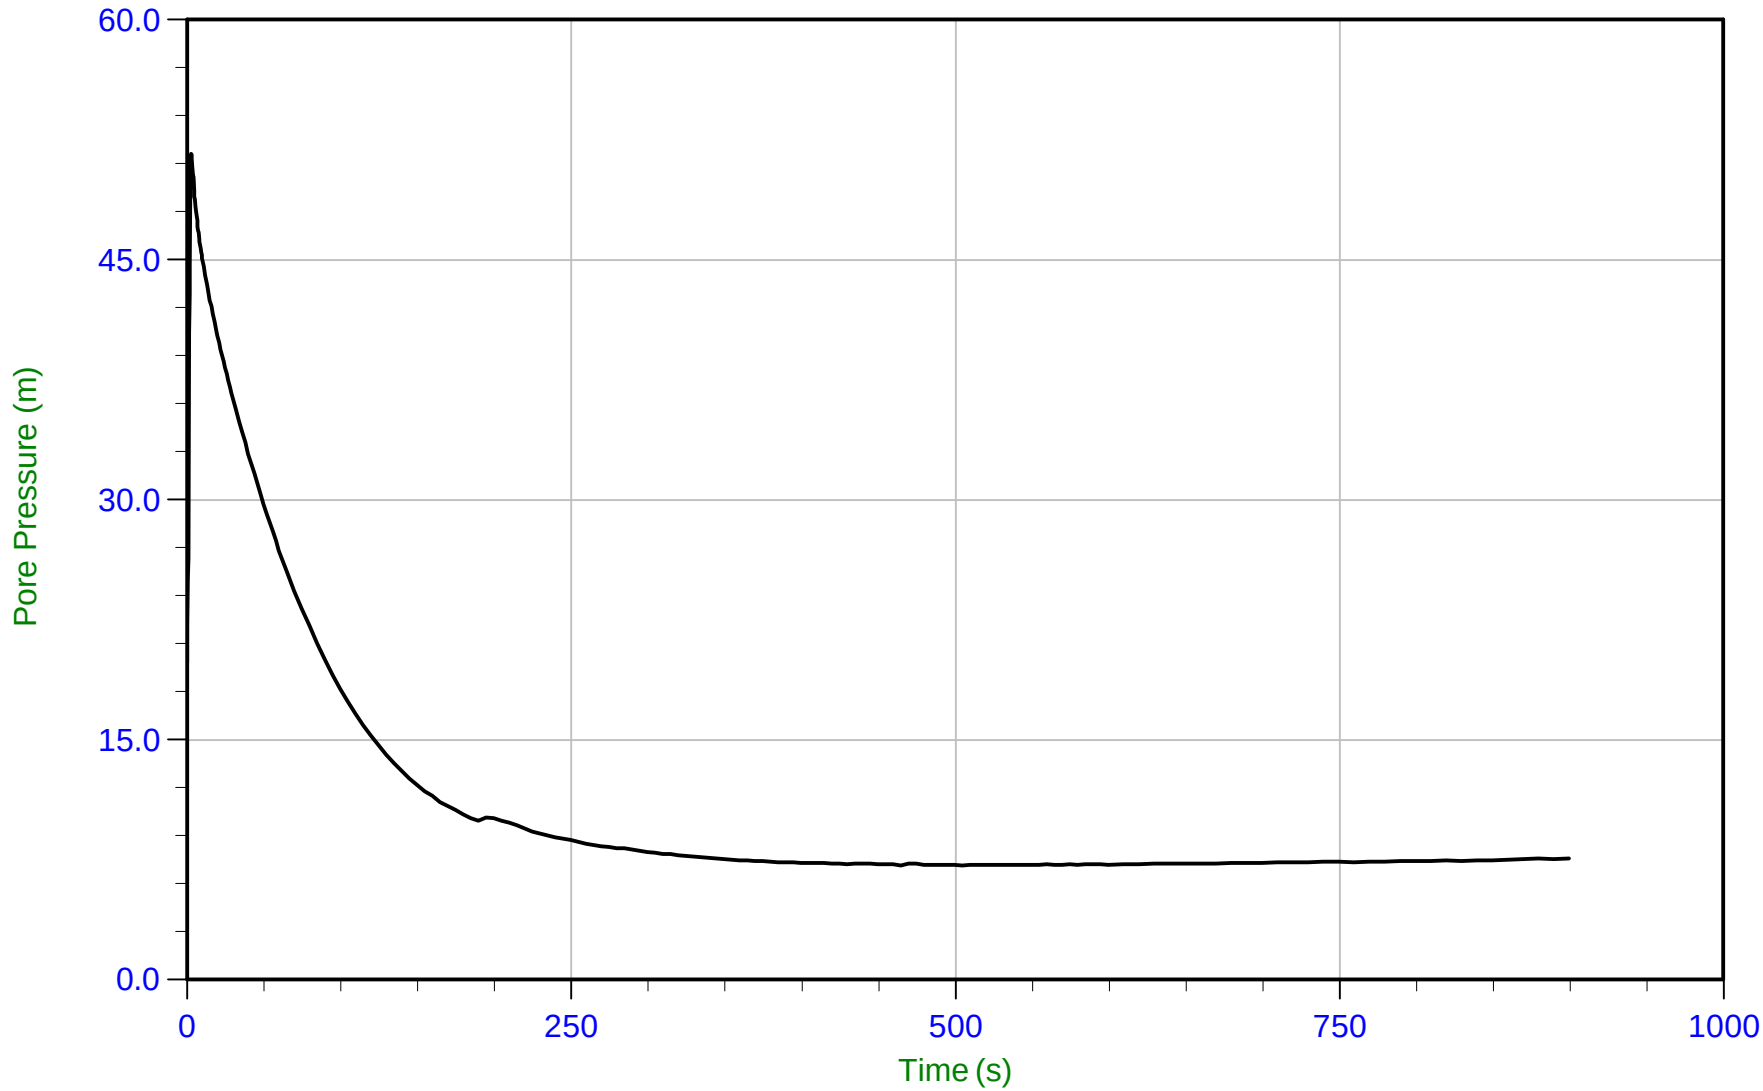

Trace Summary:

Filename: 22-02-23796_RP22-22CPT351.PPF
Depth: 4.800 m / 15.748 ft
Duration: 900.0 s


u Min: 7.1 m
u Max: 51.6 m
u Final: 7.6 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/08/2022 11:54
Site: Brooks, Alberta

Sounding: RCPT22-22CPT352
Cone: 854:T1500F15U35 Area=15 cm²

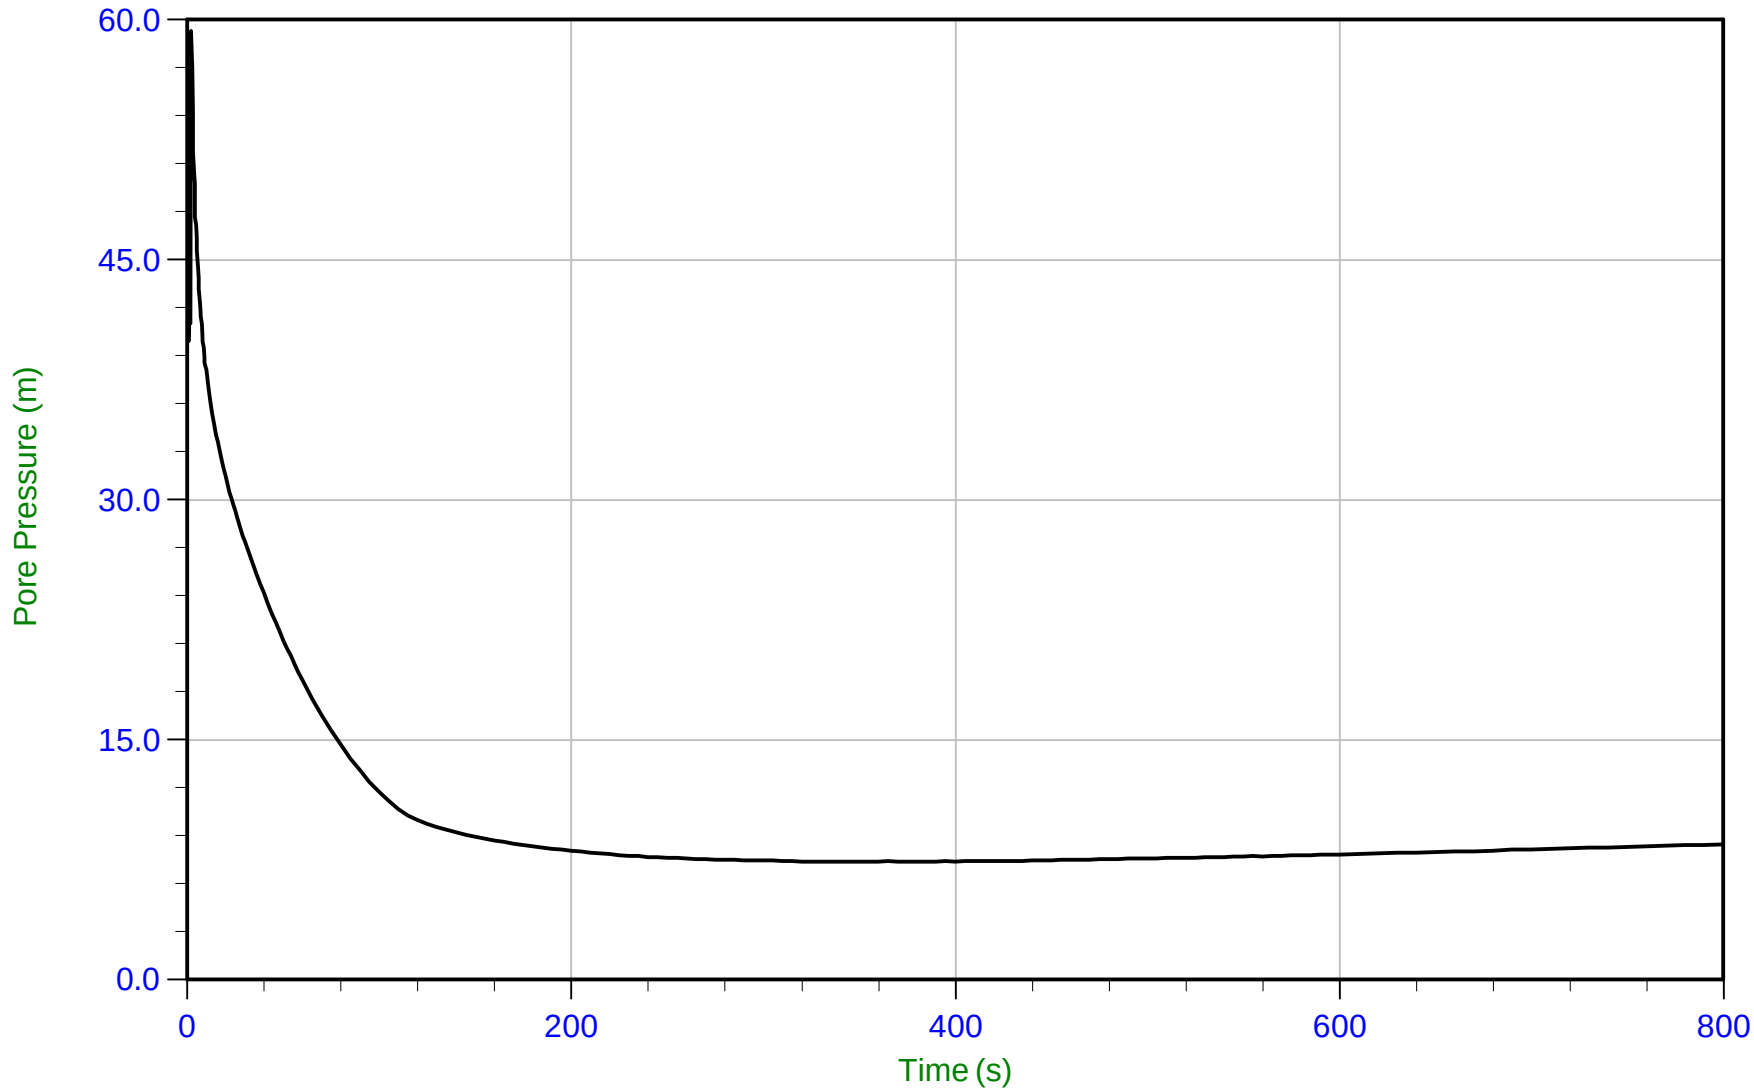

Trace Summary:

Filename: 22-02-23796_RP22-22CPT352.PPF
Depth: 5.800 m / 19.029 ft
Duration: 800.0 s


u Min: 7.4 m
u Max: 59.3 m
u Final: 8.5 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/08/2022 15:38
Site: Brooks, Alberta

Sounding: RCPT22-22CPT353C
Cone: 854:T1500F15U35 Area=15 cm²

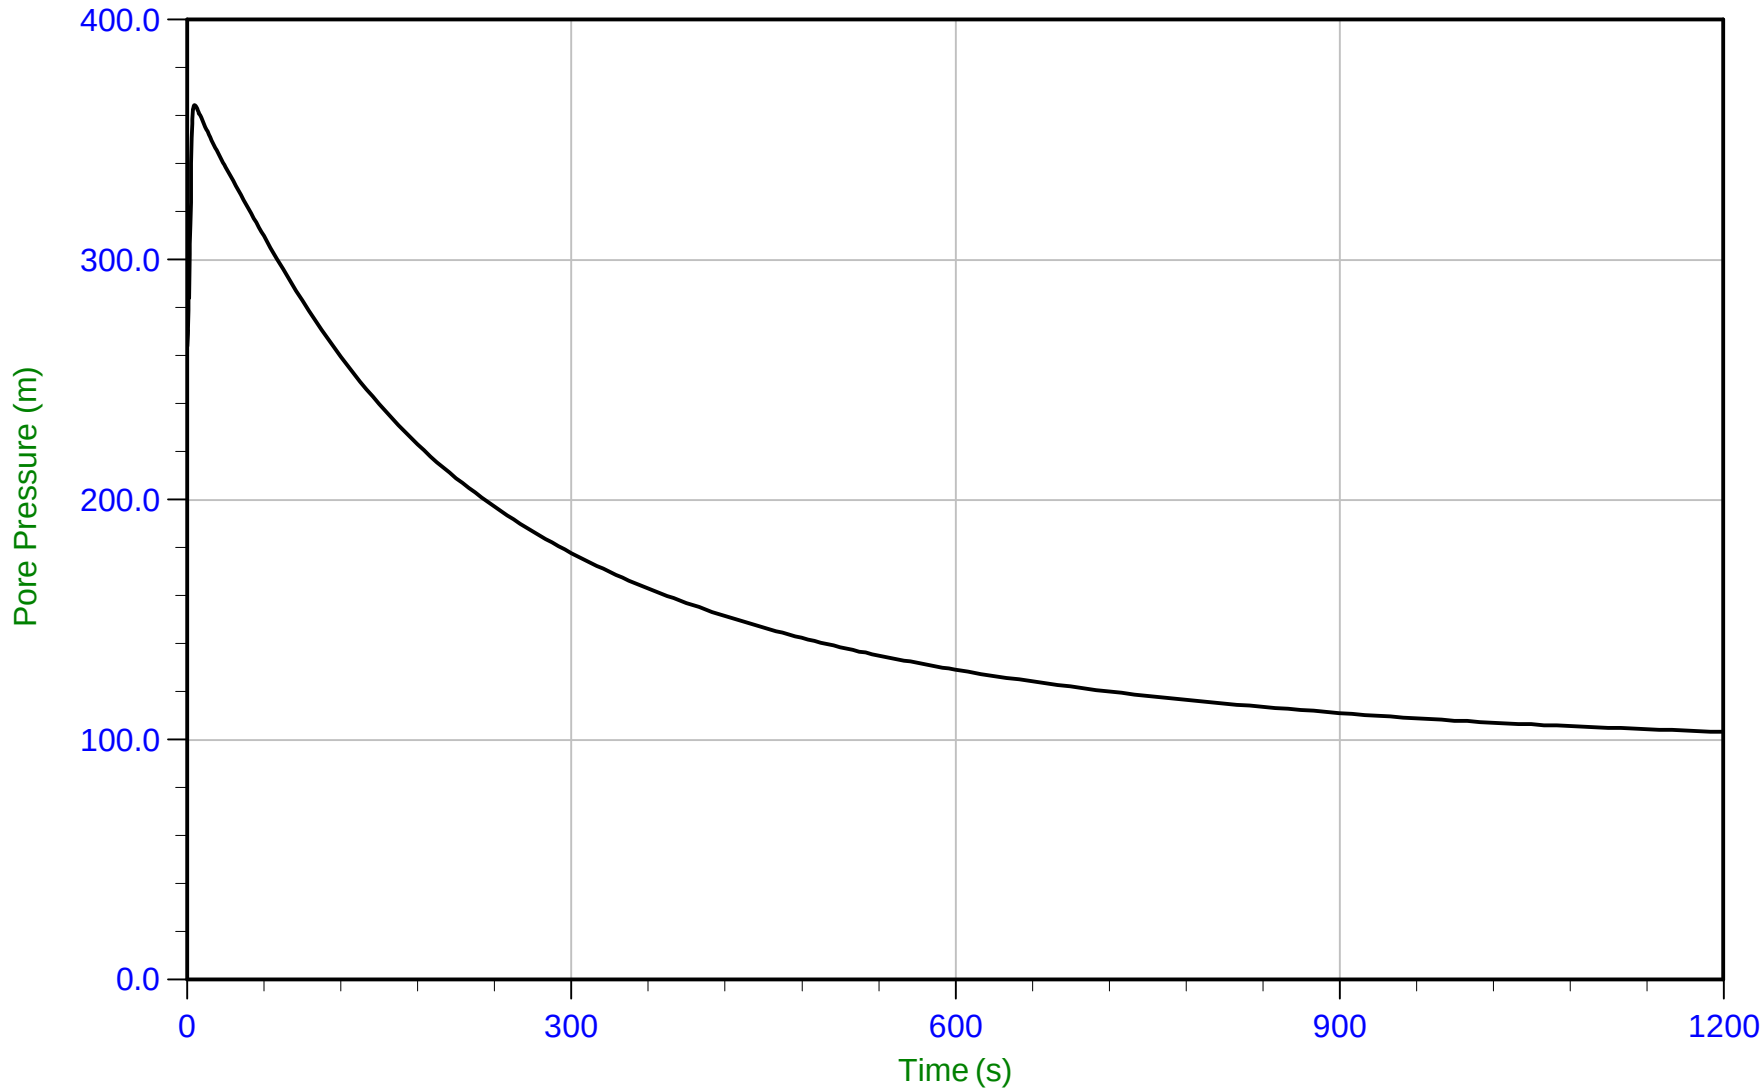

Trace Summary:

Filename: 22-02-23796_RP22-22CPT353C.PPF
Depth: 8.025 m / 26.328 ft
Duration: 1200.0 s


u Min: 103.2 m
u Max: 364.5 m
u Final: 103.2 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/09/2022 08:34
Site: Brooks, Alberta

Sounding: RCPT22-22CPT354
Cone: 854:T1500F15U35 Area=15 cm²

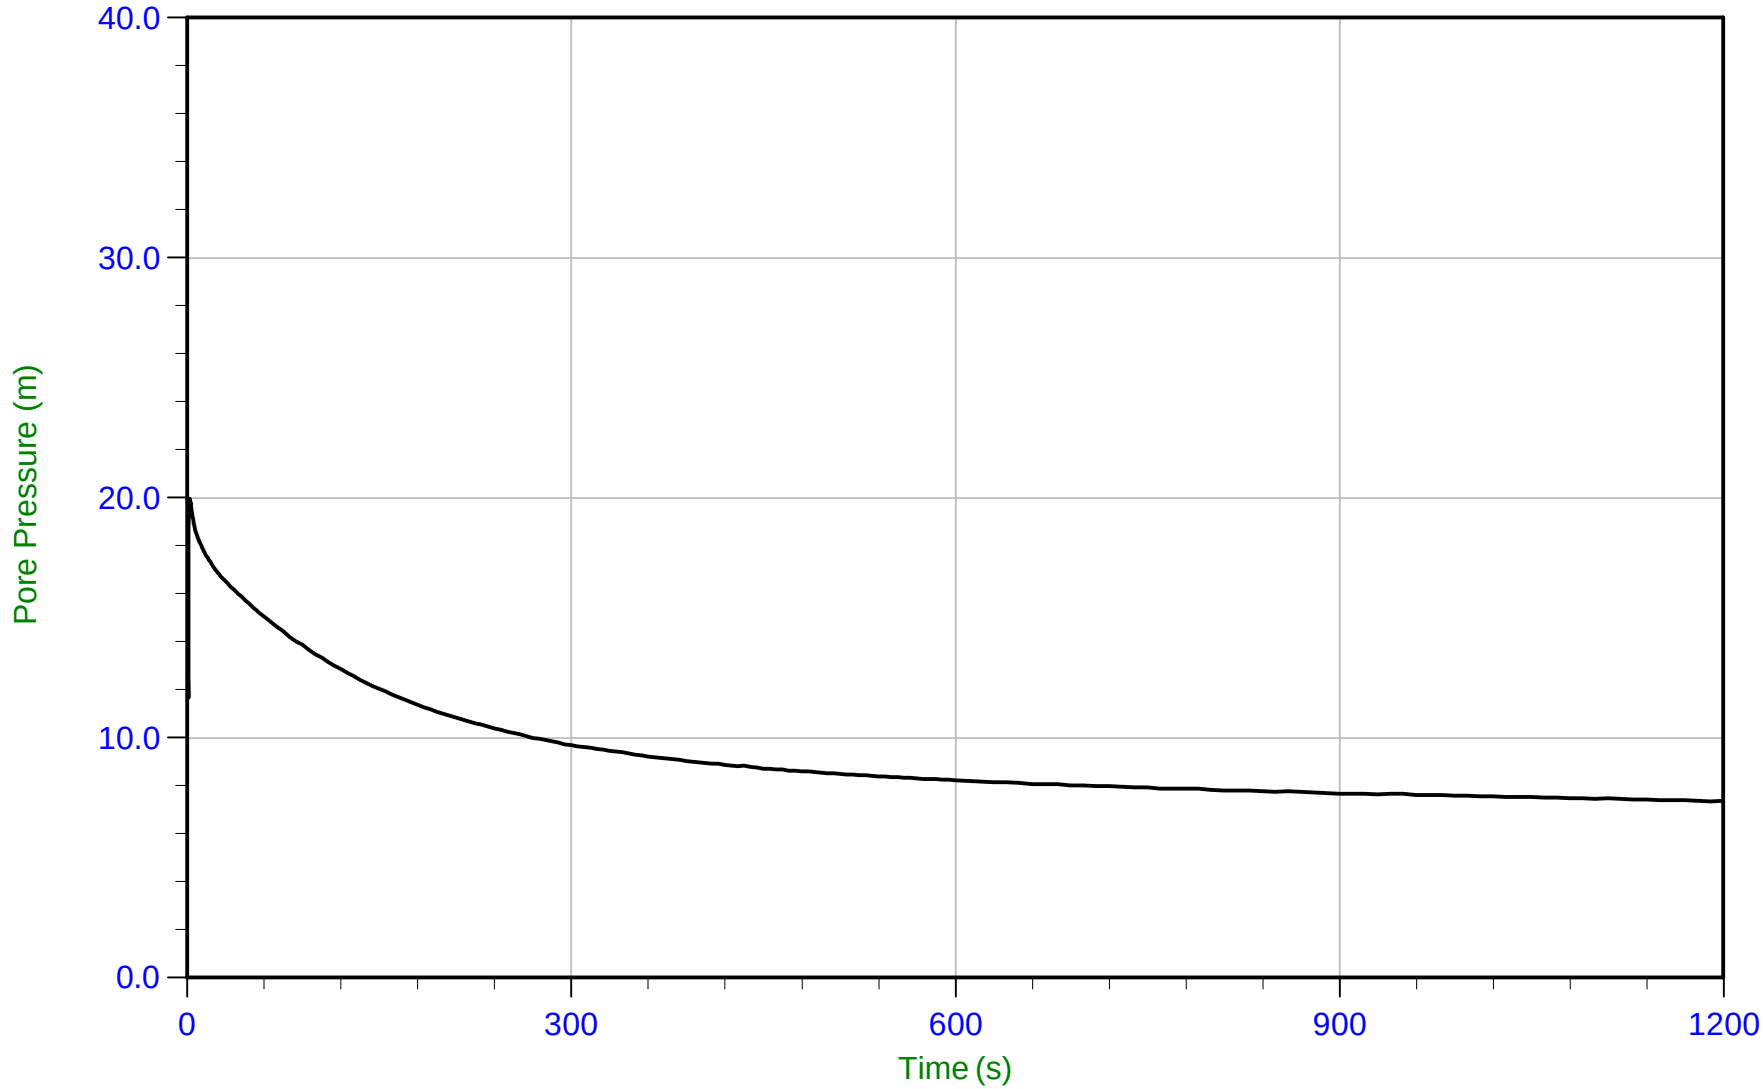

Trace Summary:

Filename: 22-02-23796_RP22-22CPT354.PPF
Depth: 4.900 m / 16.076 ft
Duration: 1200.0 s


u Min: 7.4 m
u Max: 20.0 m
u Final: 7.4 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/09/2022 11:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT355
Cone: 854:T1500F15U35 Area=15 cm²

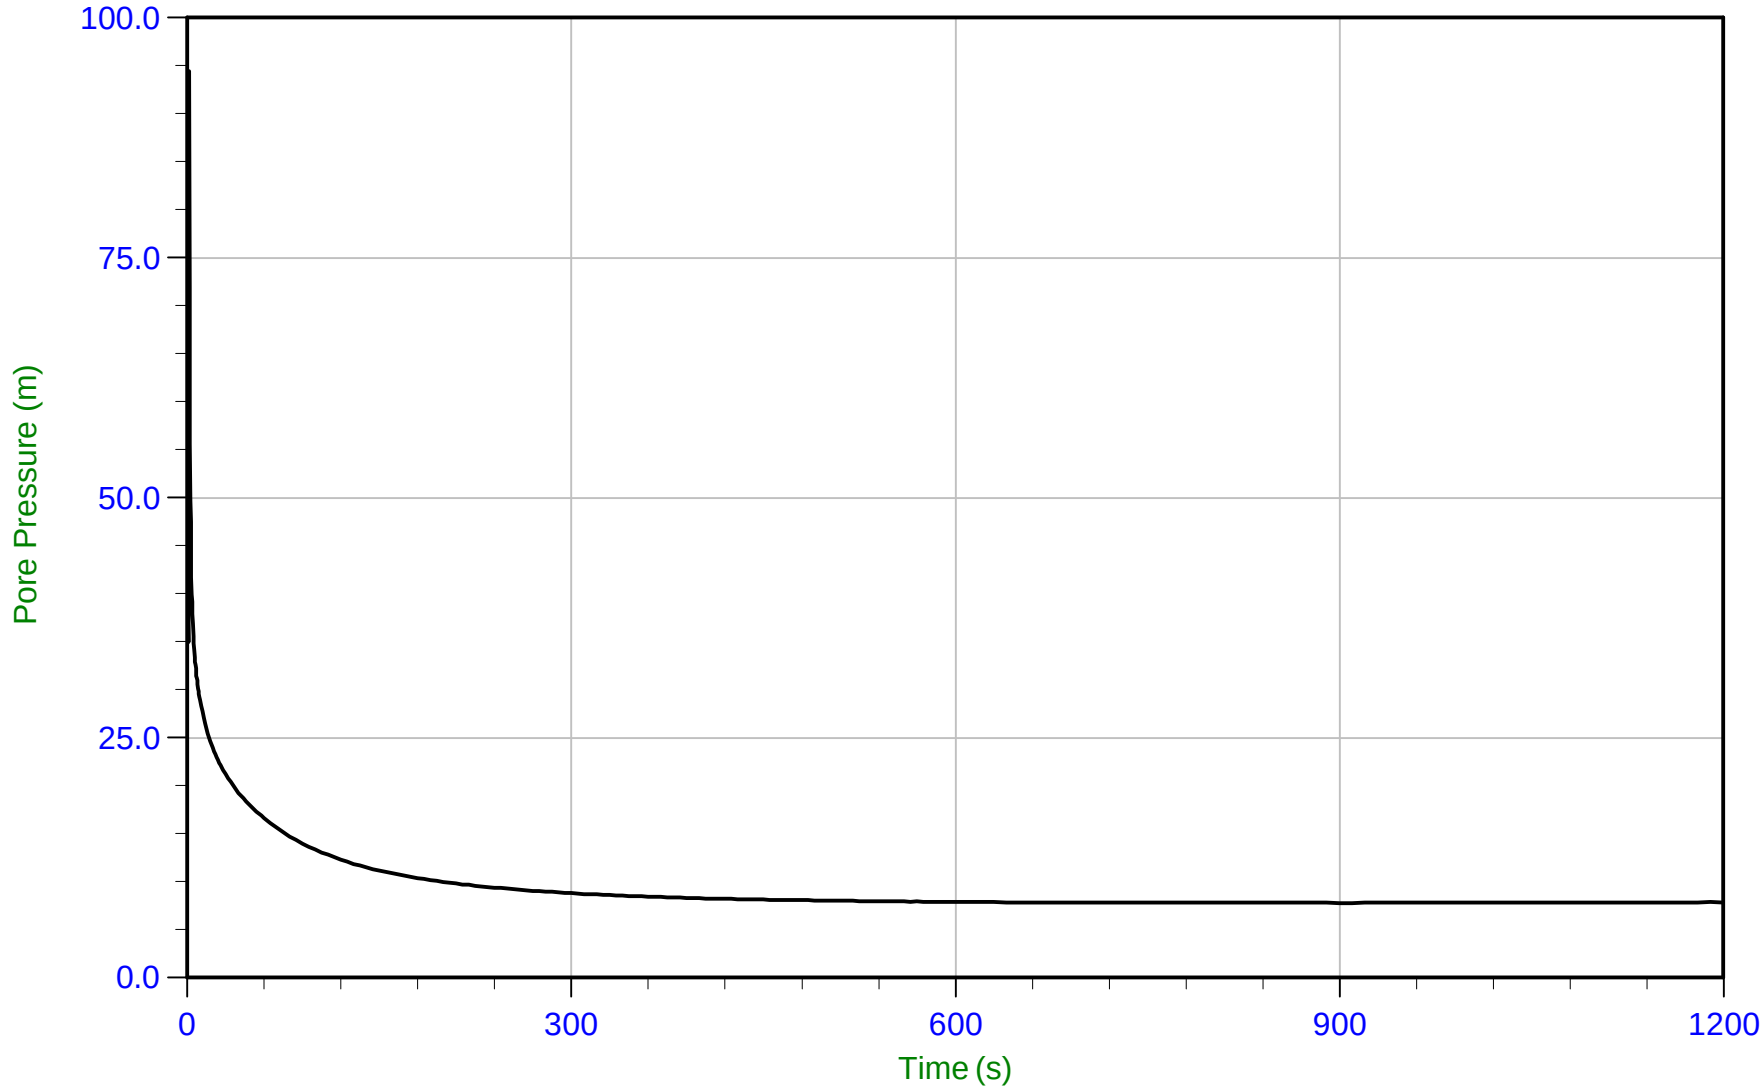

Trace Summary:

Filename: 22-02-23796_RP22-22CPT355.PPF
Depth: 4.875 m / 15.994 ft
Duration: 1200.0 s


u Min: 7.8 m
u Max: 94.5 m
u Final: 7.9 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/09/2022 11:32
Site: Brooks, Alberta

Sounding: RCPT22-22CPT355
Cone: 854:T1500F15U35 Area=15 cm²

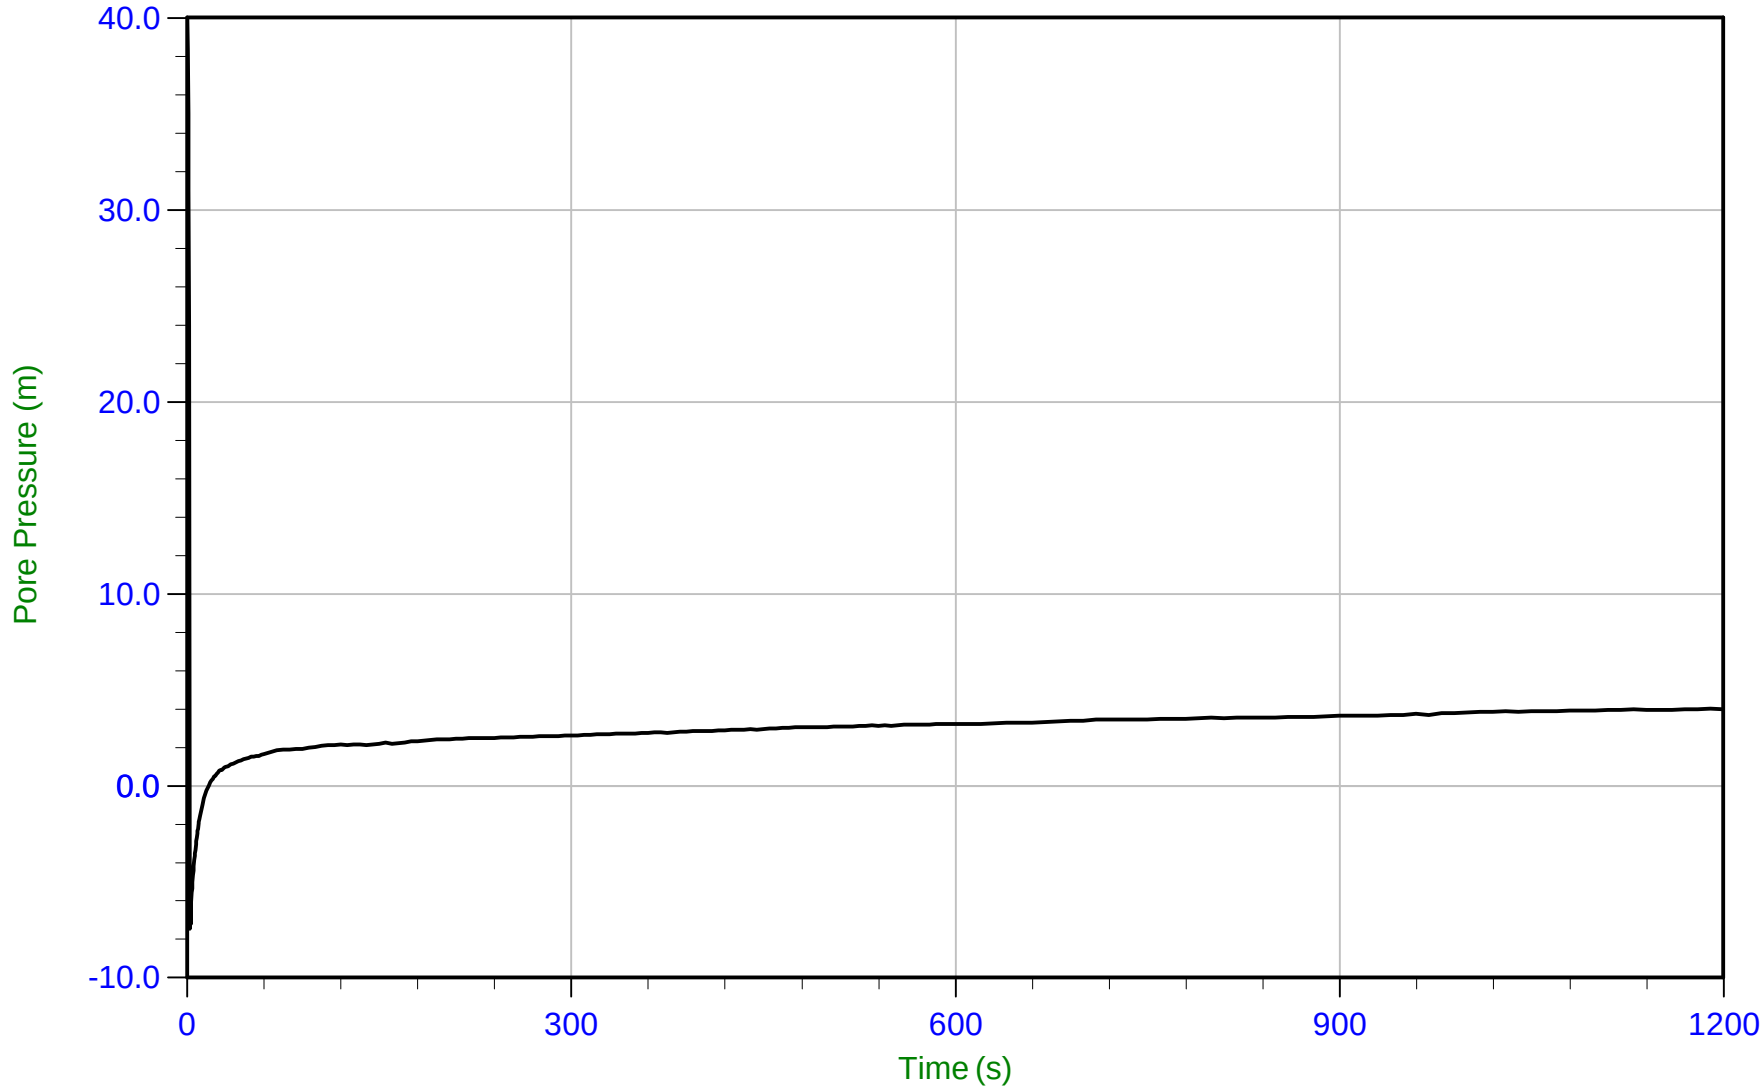

Trace Summary:

Filename: 22-02-23796_RP22-22CPT355.PPF
Depth: 9.075 m / 29.773 ft
Duration: 1200.0 s


u Min: -7.5 m
u Max: 43.1 m
u Final: 4.0 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/09/2022 15:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT356
Cone: 854:T1500F15U35 Area=15 cm²

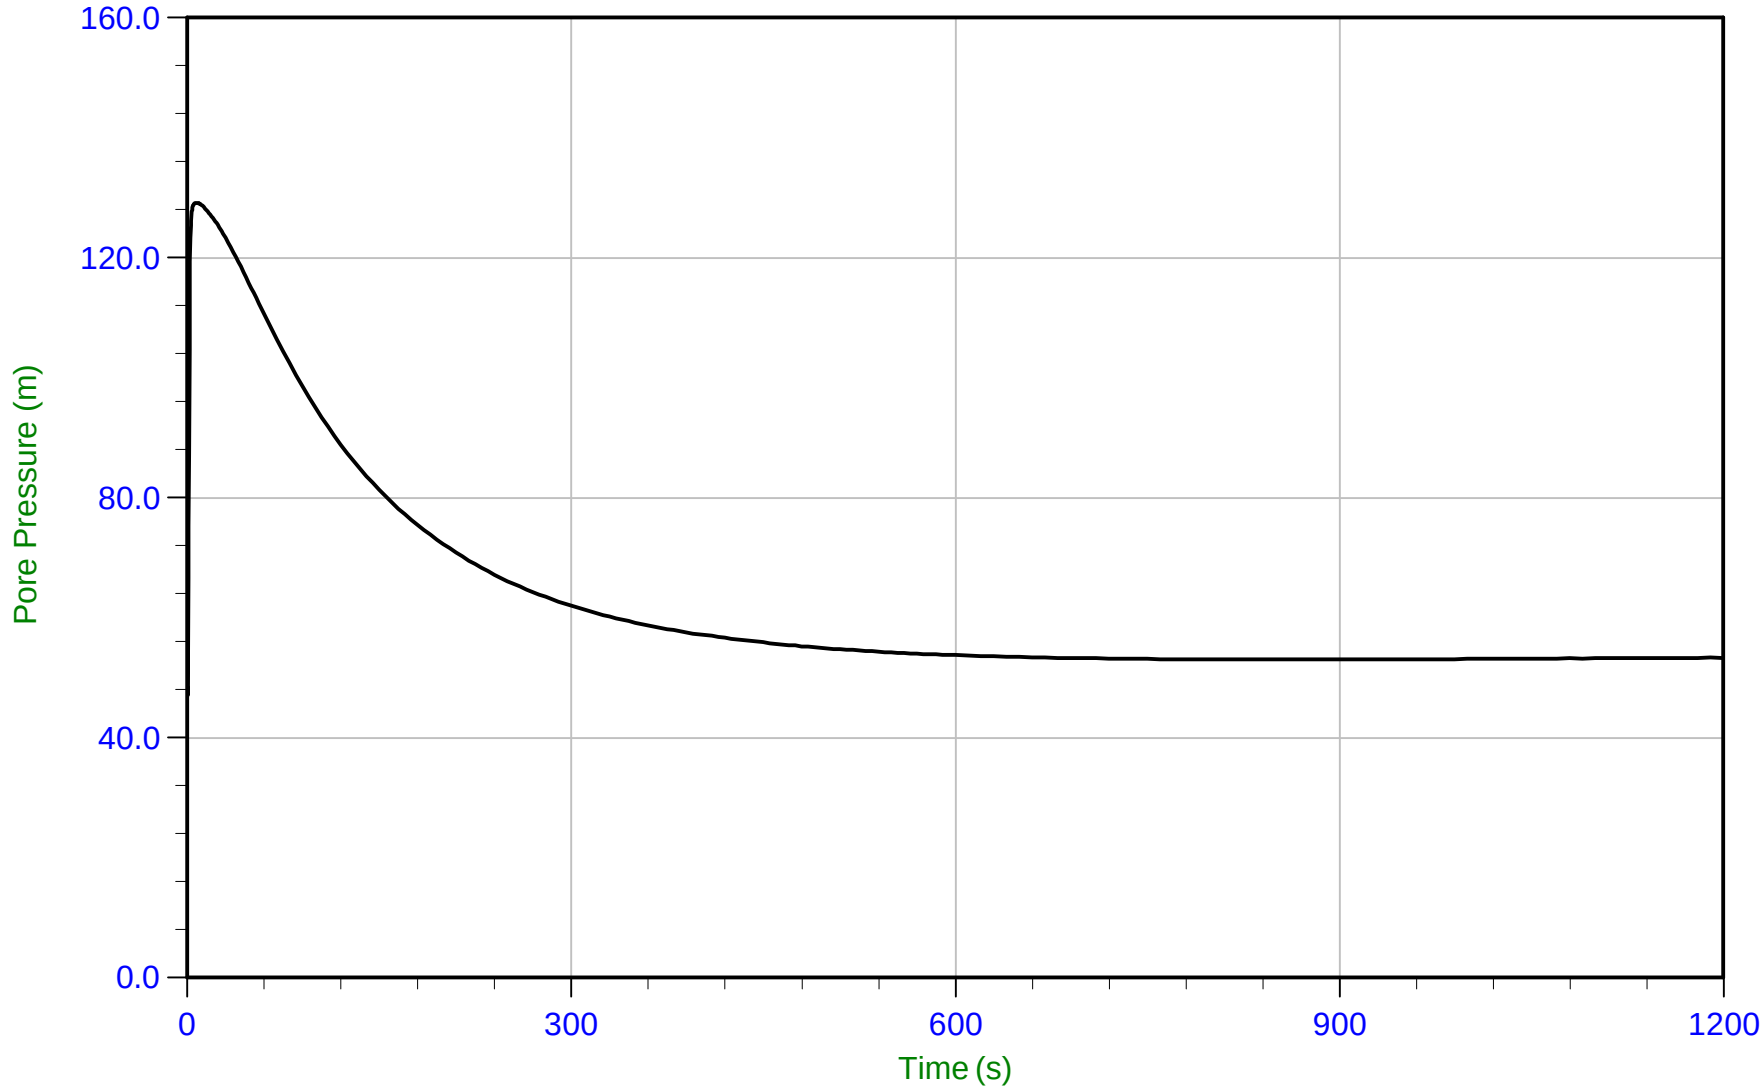

Trace Summary:

Filename: 22-02-23796_RP22-22CPT356.PPF
Depth: 7.325 m / 24.032 ft
Duration: 1200.0 s


u Min: 47.1 m
u Max: 129.2 m
u Final: 53.3 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/09/2022 15:03
Site: Brooks, Alberta

Sounding: RCPT22-22CPT356
Cone: 854:T1500F15U35 Area=15 cm²

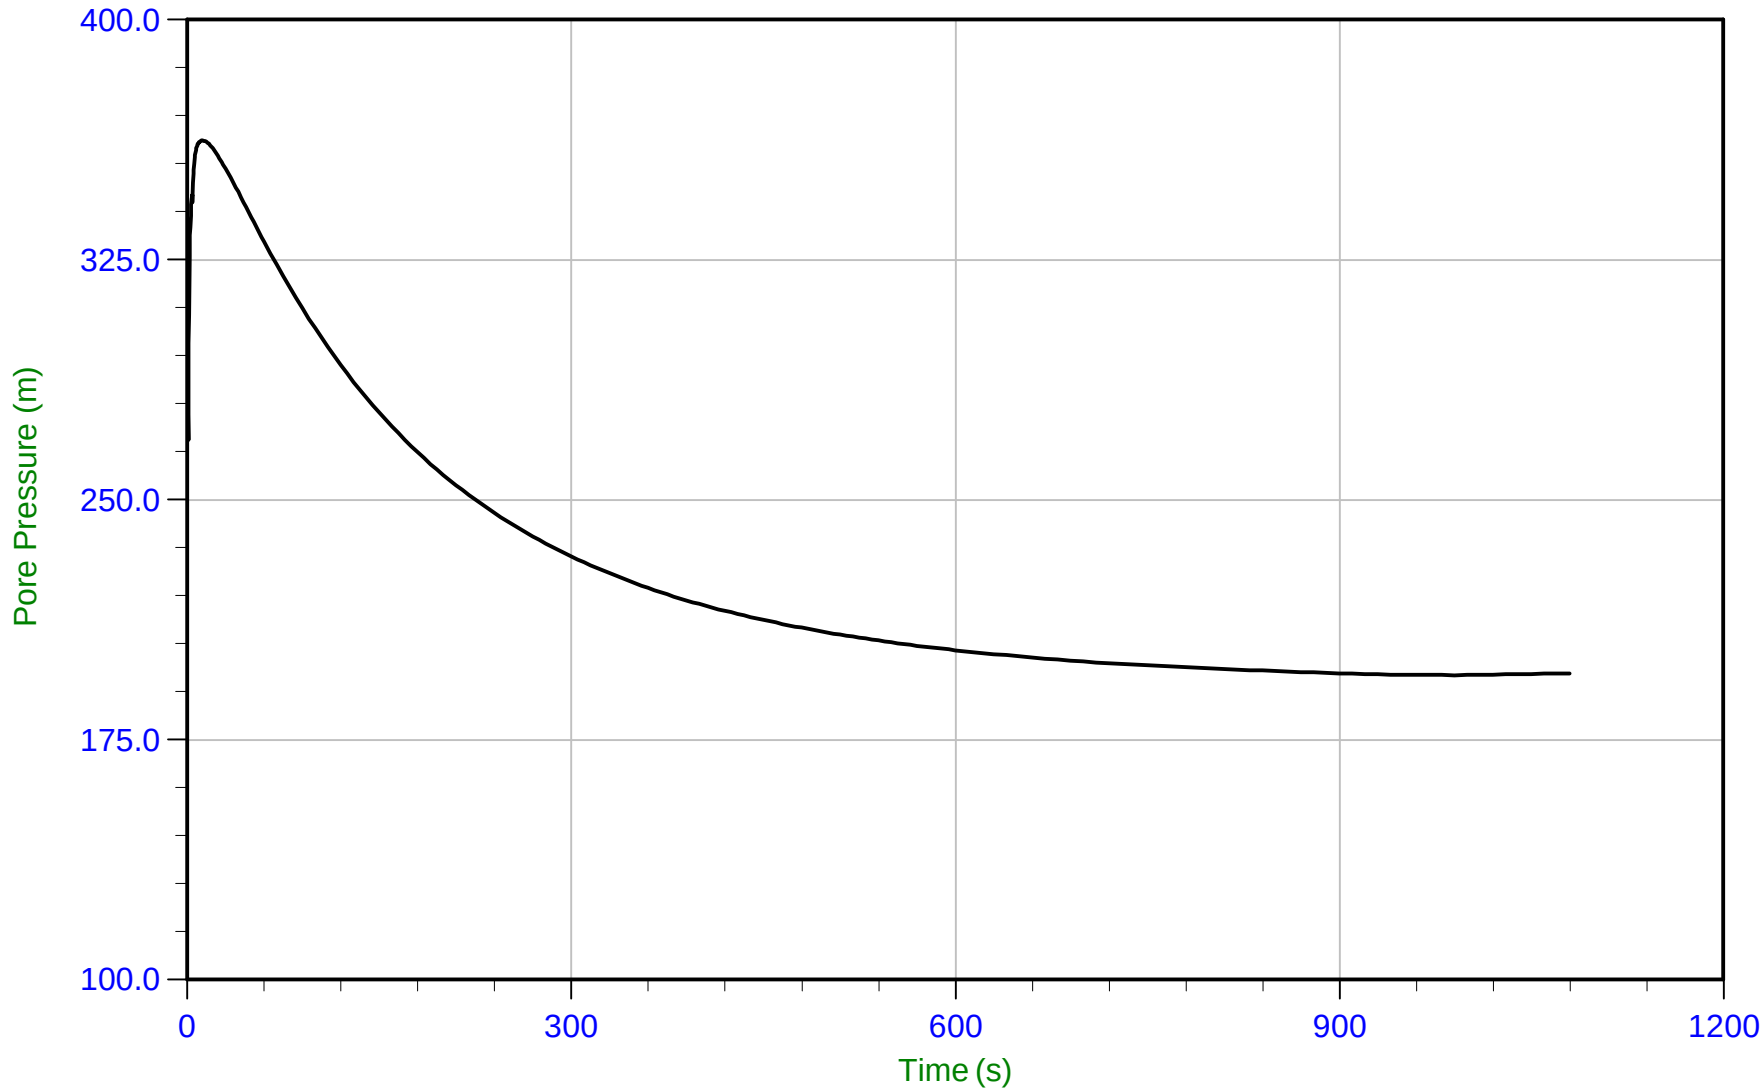

Trace Summary:

Filename: 22-02-23796_RP22-22CPT356.PPF
Depth: 10.225 m / 33.546 ft
Duration: 1080.0 s


u Min: 195.2 m
u Max: 362.3 m
u Final: 195.8 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/11/2022 09:22
Site: Brooks, Alberta

Sounding: RCPT22-22CPT357
Cone: 854:T1500F15U35 Area=15 cm²

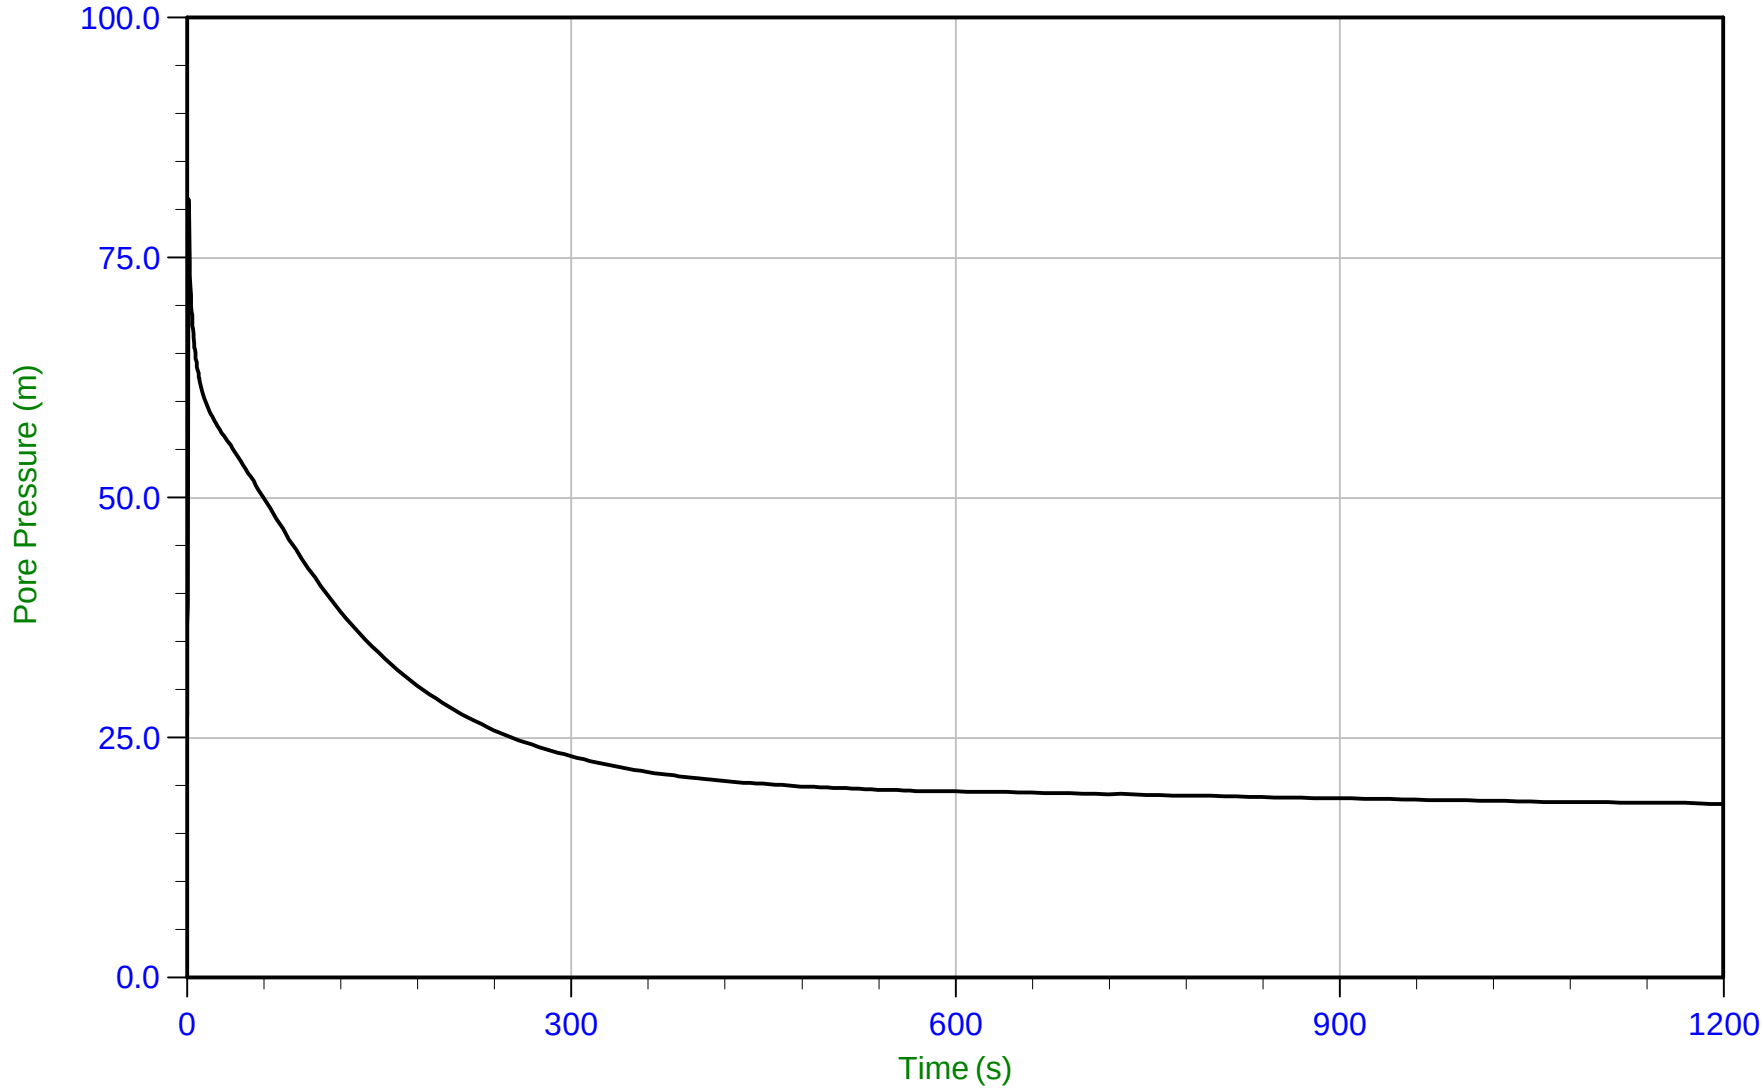

Trace Summary:

Filename: 22-02-23796_RP22-22CPT357.PPF
Depth: 3.925 m / 12.877 ft
Duration: 1200.0 s


u Min: 18.1 m
u Max: 81.1 m
u Final: 18.1 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/11/2022 11:42
Site: Brooks, Alberta

Sounding: RCPT22-22CPT358
Cone: 750:T1500F15U35 Area=15 cm²

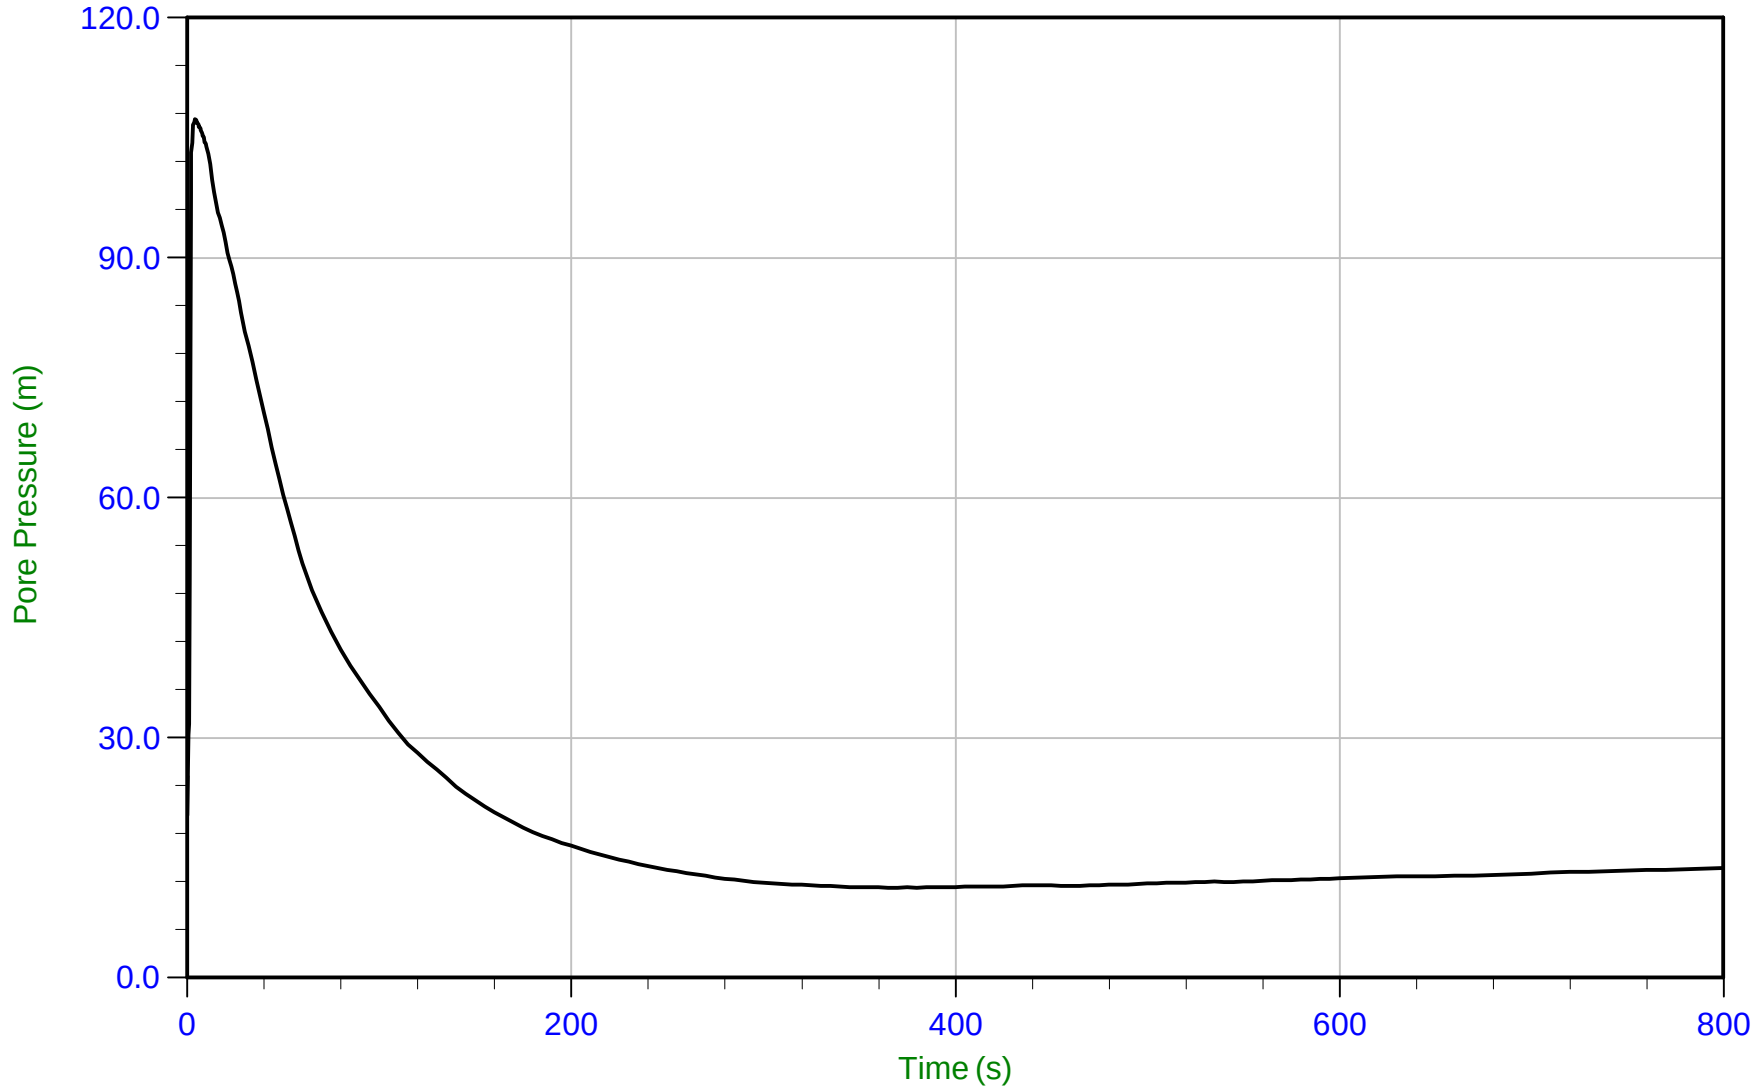

Trace Summary:

Filename: 22-02-23796_RP22-22CPT358.PPF
Depth: 5.925 m / 19.439 ft
Duration: 800.0 s


u Min: 11.2 m
u Max: 107.3 m
u Final: 13.7 m

CONETEC

MPE Engineering

Job No: 22-02-23796
Date: 04/11/2022 15:39
Site: Brooks, Alberta

Sounding: RCPT22-22CPT359
Cone: 821:T1000F10U35 Area=15 cm²

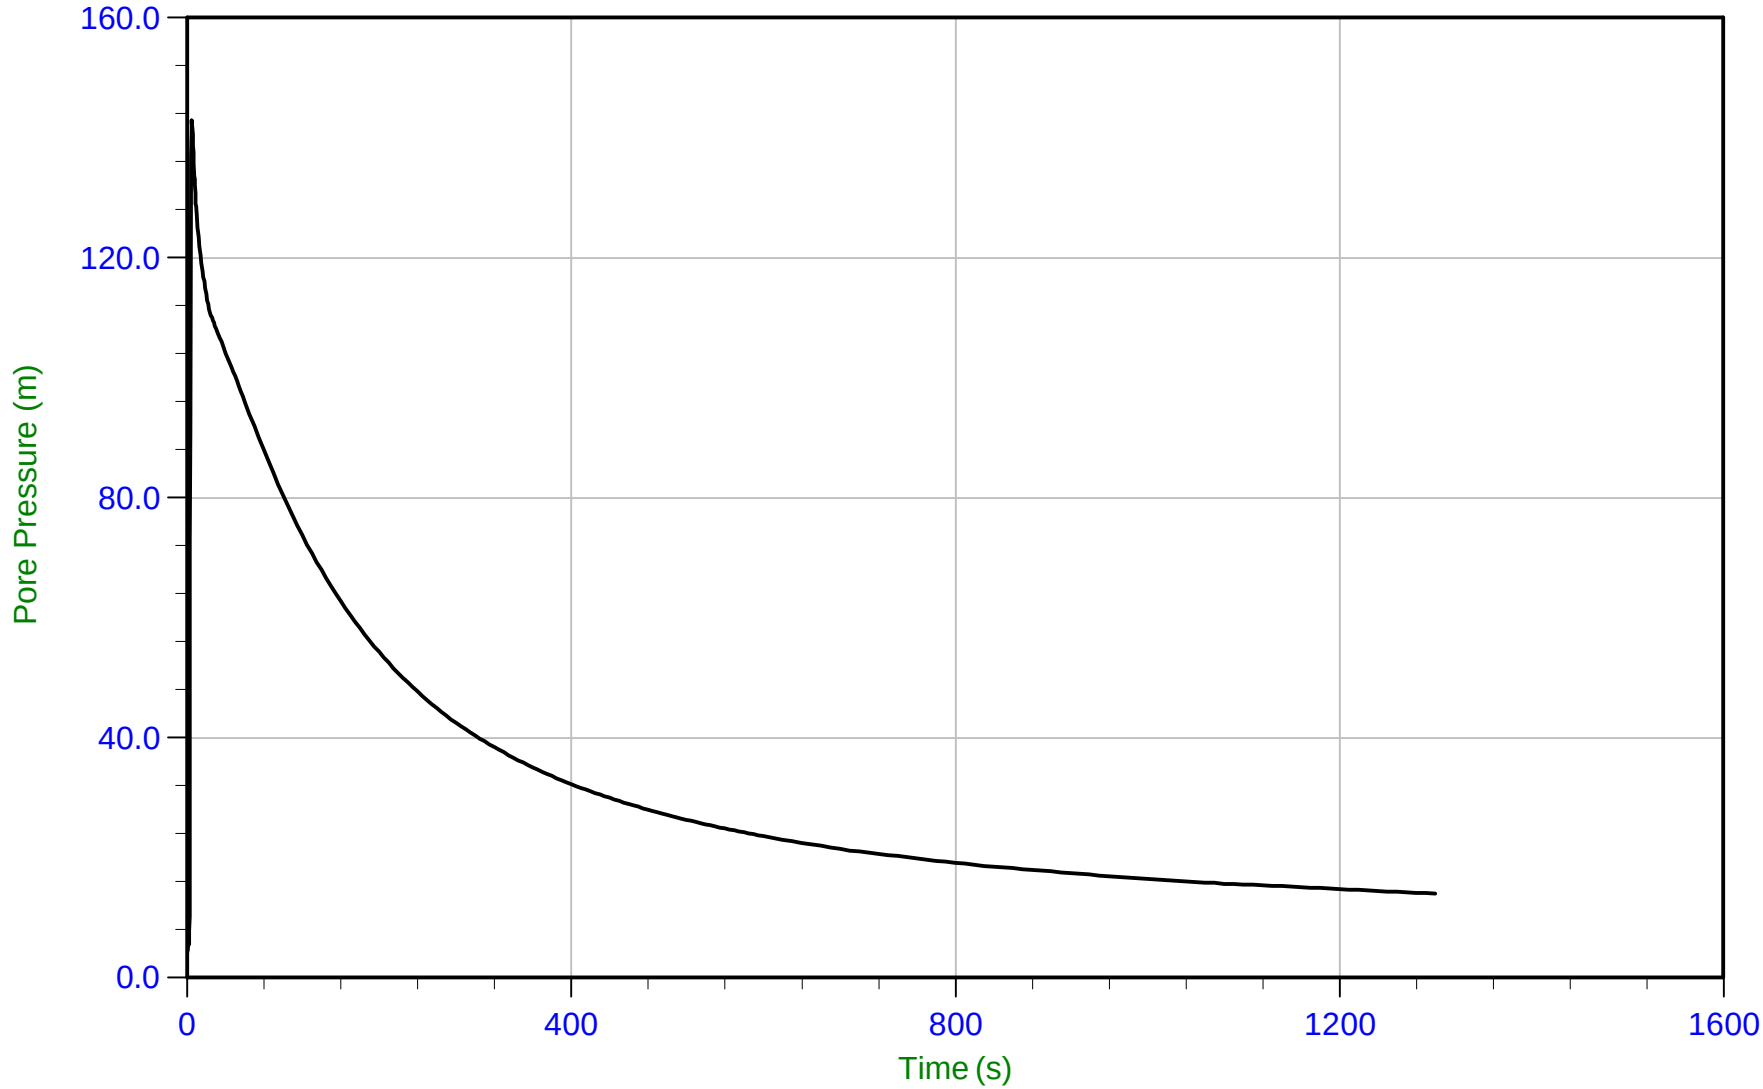

Trace Summary:

Filename: 22-02-23796_RP22-22CPT359.PPF
Depth: 7.950 m / 26.082 ft
Duration: 1300.0 s

u Min: 4.2 m
u Max: 142.9 m
u Final: 14.0 m

Description of Methods for Calculated CPT Geotechnical Parameters

CONETEC

CALCULATED CPT GEOTECHNICAL PARAMETERS

A Detailed Description of the Methods Used in ConeTec's CPT Geotechnical Parameter Calculation and Plotting Software



Revision SZW-Rev 14

Revised November 26, 2019
Prepared by Jim Greig, M.A.Sc, P.Eng (BC)

Limitations

The geotechnical parameter output was prepared specifically for the site and project named in the accompanying report subject to objectives, site conditions and criteria provided to ConeTec by the client. The output may not be relied upon by any other party or for any other site without the express written permission of ConeTec Group (ConeTec) or any of its affiliates. For this project, ConeTec has provided site investigation services, prepared factual data reporting and produced geotechnical parameter calculations consistent with current best practices. No other warranty, expressed or implied, is made.

To understand the calculations that have been performed and to be able to reproduce the calculated parameters the user is directed to the basic descriptions for the methods in this document and the detailed descriptions and their associated limitations and appropriateness in the technical references cited for each parameter.

ConeTec's Calculated CPT Geotechnical Parameters as of November 26, 2019

ConeTec's CPT parameter calculation and plotting routine provides a tabular output of geotechnical parameters based on current published CPT correlations and is subject to change to reflect the current state of practice. Due to drainage conditions and the basic assumptions and limitations of the correlations, not all geotechnical parameters provided are considered applicable for all soil types. The results are presented only as a guide for geotechnical use and should be carefully examined for consideration in any geotechnical design. Reference to current literature is strongly recommended. ConeTec does not warranty the correctness or the applicability of any of the geotechnical parameters calculated by the program and does not assume liability for any use of the results in any design or review. For verification purposes we recommend that representative hand calculations be done for any parameter that is critical for design purposes. The end user of the parameter output should also be fully aware of the techniques and the limitations of any method used by the program. The purpose of this document is to inform the user as to which methods were used and to direct the end user to the appropriate technical papers and/or publications for further reference.

The geotechnical parameter output was prepared specifically for the site and project named in the accompanying report subject to objectives, site conditions and criteria provided to ConeTec by the client. The output may not be relied upon by any other party or for any other site without the express written permission of ConeTec Group (ConeTec) or any of its affiliates.

The CPT calculations are based on values of tip resistance, sleeve friction and pore pressures considered at each data point or averaged over a user specified layer thickness (e.g. 0.20 m). Note that q_t is the tip resistance corrected for pore pressure effects and q_c is the recorded tip resistance. The corrected tip resistance (corrected using u_2 pore pressure values) is used for all of the calculations. Since all ConeTec cones have equal end area friction sleeves pore pressure corrections to sleeve friction, f_s, are not required.

The tip correction is: $q_t = q_c + (1-a) \bullet u_2$ (consistent units are implied)

where: q_t is the corrected tip resistance
q_c is the recorded tip resistance
u_2 is the recorded dynamic pore pressure behind the tip (u_2 position)
a is the Net Area Ratio for the cone (typically 0.80 for ConeTec cones)

The total stress calculations are based on soil unit weight values that have been assigned to the Soil Behavior Type (SBT) zones, from a user defined unit weight profile, by using a single uniform value throughout the profile, through unit weight estimation techniques described in various technical papers or from a combination of these methods. The parameter output files indicate the method(s) used.

Effective vertical overburden stresses are calculated based on a hydrostatic distribution of equilibrium pore pressures below the water table or from a user defined equilibrium pore pressure profile (typically obtained from CPT dissipation tests) or a combination of the two. For over water projects the stress effects of the column of water above the mudline have been taken into account as has the appropriate unit weight of water. How this is done depends on where the instruments were zeroed (i.e. on deck or at the mudline). The parameter output files indicate the method(s) used.

A majority of parameter calculations are derived or driven by results based on material types as determined by the various soil behavior type charts depicted in Figures 1 through 5. The parameter output files indicate the method(s) used.

The Soil Behavior Type classification chart shown in Figure 1 is the classic non-normalized SBT Chart developed at the University of British Columbia and reported in Robertson, Campanella, Gillespie and Greig (1986). Figure 2 shows the original normalized (linear method) SBT chart developed by Robertson (1990). The Bq classification charts shown in Figures 3a and 3b incorporate pore pressures into the SBT classification and are based on the methods described in Robertson (1990). Many of these charts have been summarized in Lunne, Robertson and Powell (1997). The

Jefferies and Davies SBT chart shown in Figure 3c is based on the techniques discussed in Jefferies and Davies (1993) which introduced the concept of the Soil Behavior Type Index parameter, I_c. Please note that the I_c parameter developed by Robertson and Fear (1995) and Robertson and Wride (1998) is similar in concept but uses a slightly different calculation method than that used by Jefferies and Davies (1993) as the latter incorporates pore pressure in their technique through the use of the Bq parameter. The normalized Qtn SBT chart shown in Figure 4 is based on the work by Robertson (2009) utilizing a variable stress ratio exponent, n, for normalization based on a slightly modified redefinition and iterative approach for I_c. The boundary curves drawn on the chart are based on the work described in Robertson (2010).

Figure 5 shows a revised behavior based chart by Robertson (2016) depicting contractive-dilative zones. As the zones represent material behavior rather than soil gradation ConeTec has chosen a set of zone colors that are less likely to be confused with material type colors from previous SBT charts. These colors differ from those used by Dr. Robertson.

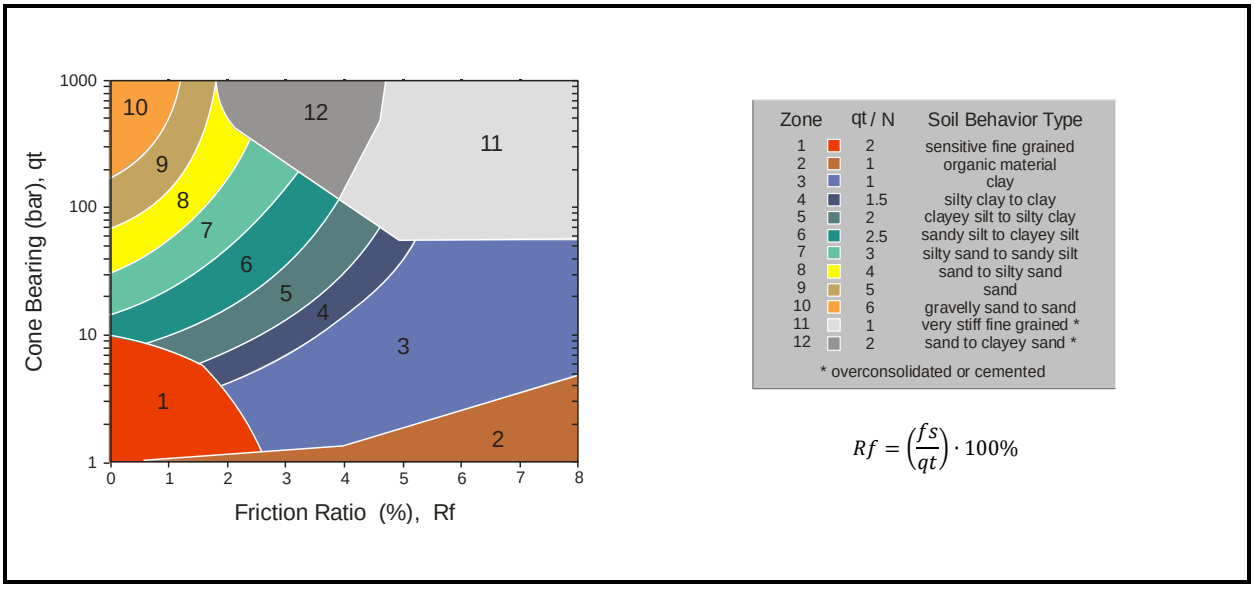


Figure 1. Non-Normalized Soil Behavior Type Classification Chart (SBT)

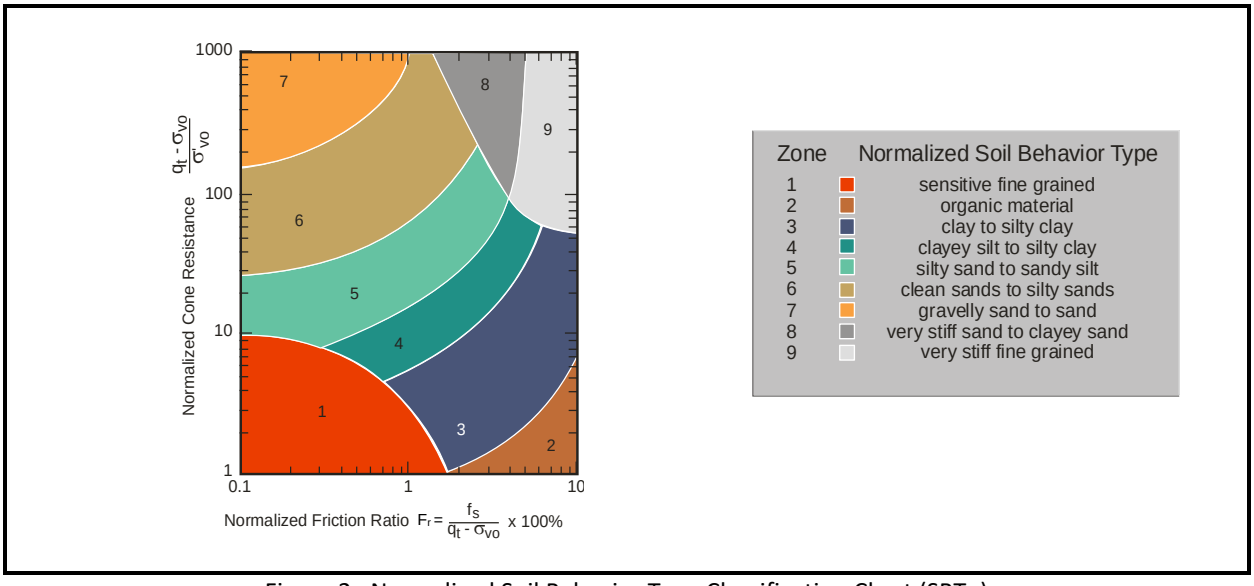


Figure 2. Normalized Soil Behavior Type Classification Chart (SBTn)

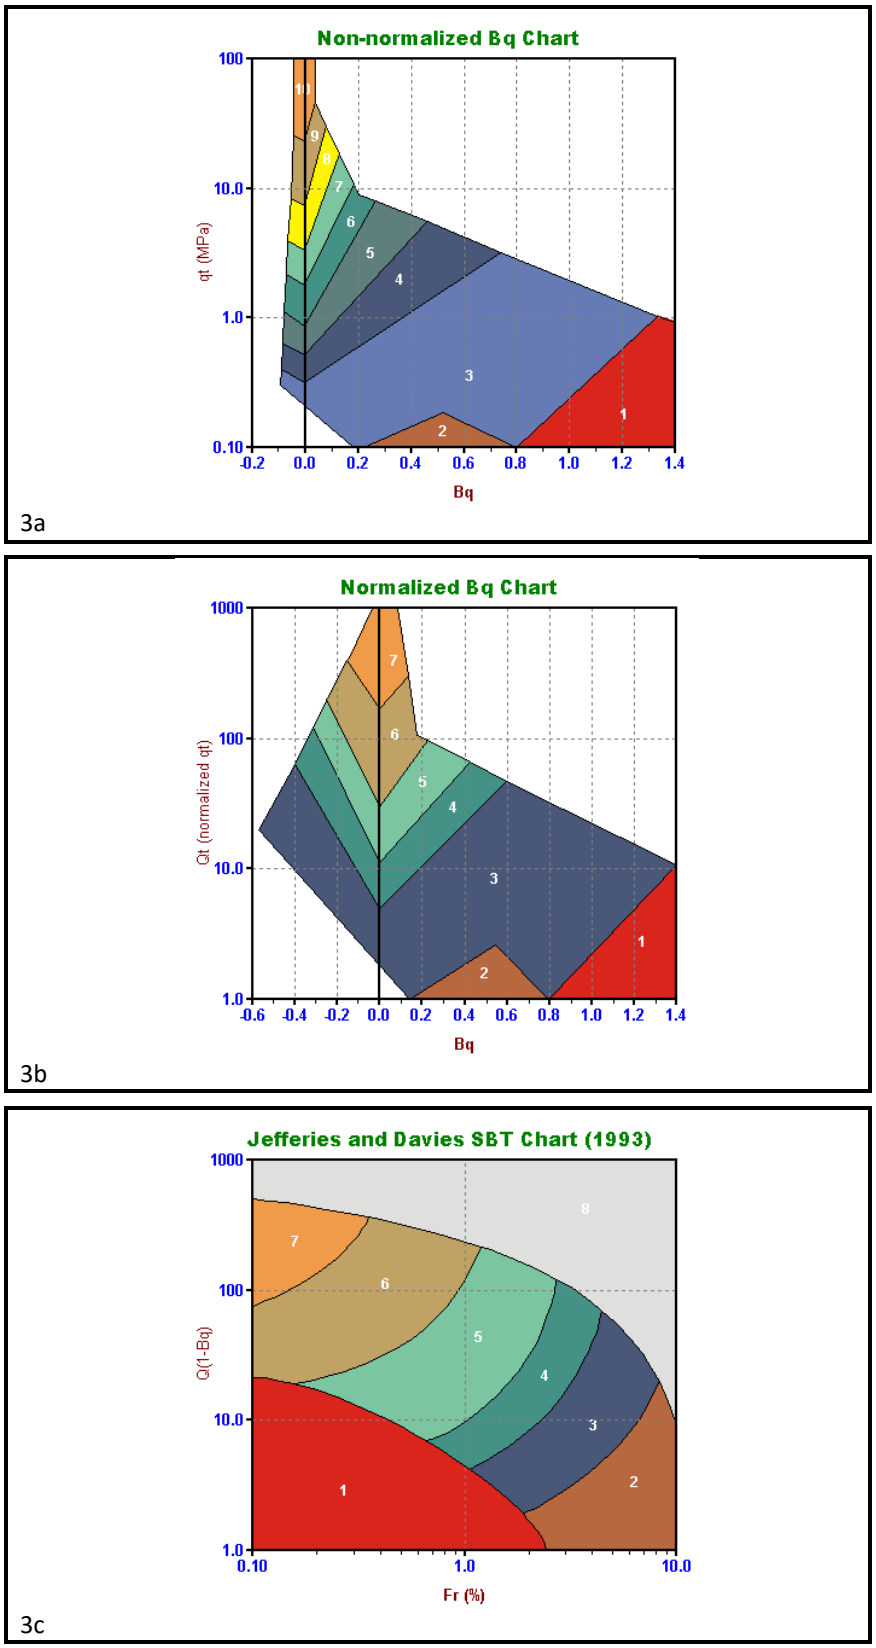


Figure 3. Alternate Soil Behavior Type Charts

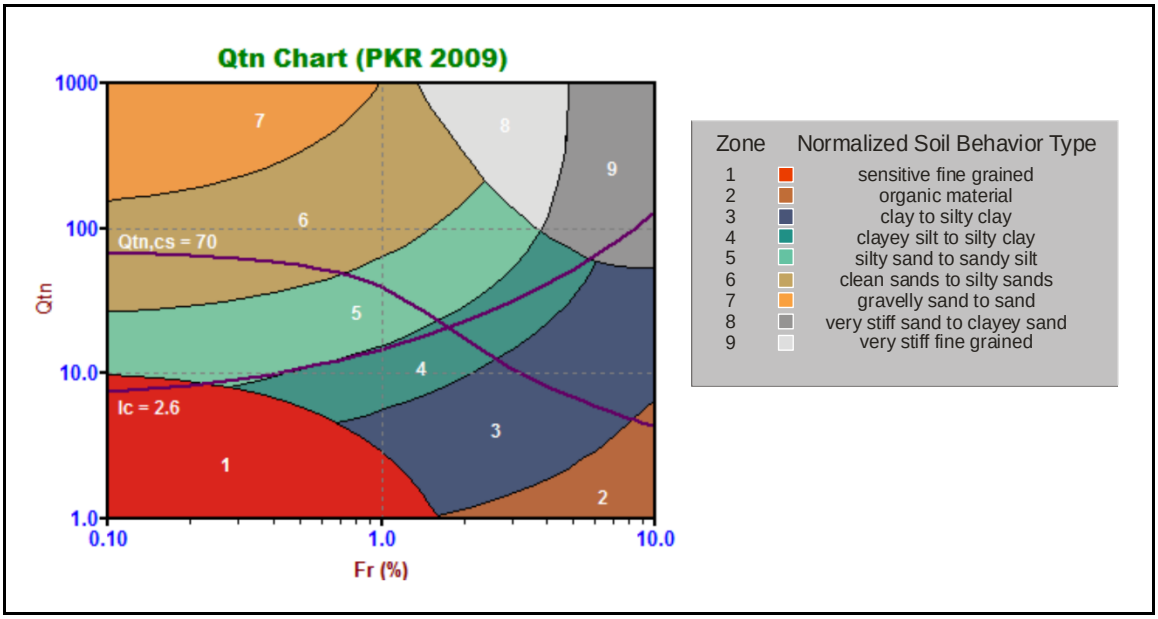


Figure 4. Normalized Soil Behavior Type Chart using Q_{tn} (SBT Qtn)

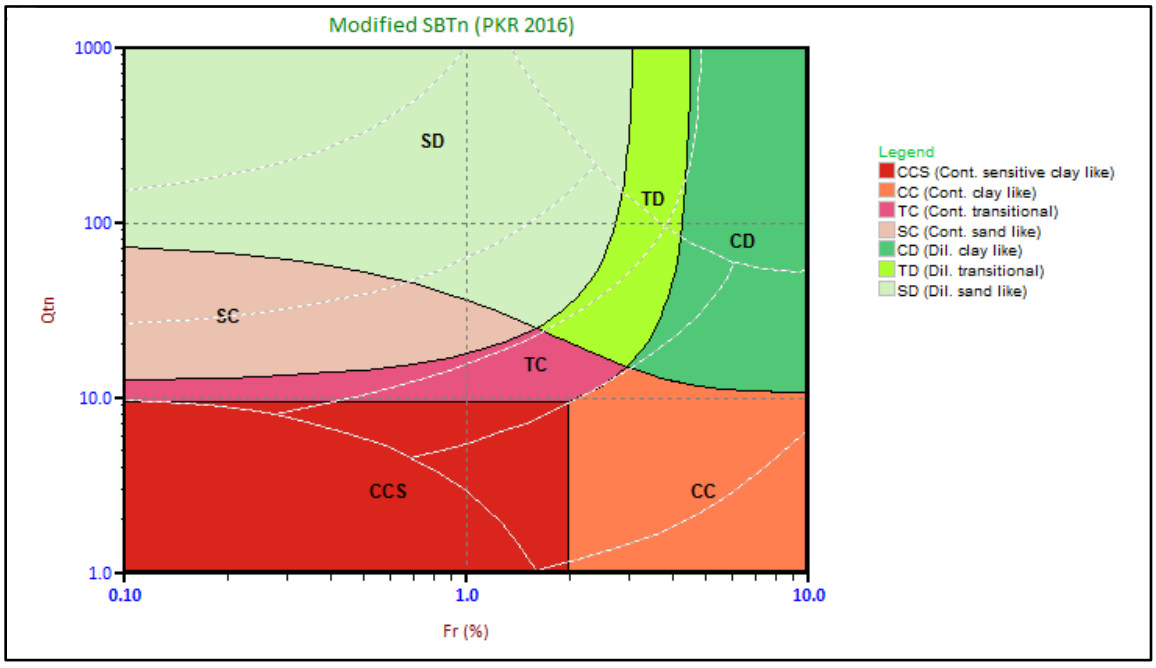


Figure 5. Modified SBTn Behavior Based Chart

Details regarding the geotechnical parameter calculations are provided in Tables 1a and 1b. The appropriate references cited are listed in Table 2. Non-liquefaction specific parameters are detailed in Table 1a and liquefaction specific parameters are detailed in Table 1b.

Where methods are based on charts or techniques that are too complex to describe in this summary the user should refer to the cited material. Specific limitations for each method are described in the cited material.

Where the results of a calculation/correlation are deemed *'invalid'* the value will be represented by the text strings "-9999", "-9999.0", the value 0.0 (Zero) or an empty cell. Invalid results will occur because of (and not limited to) one or a combination of:

1. Invalid or undefined CPT data (e.g. drilled out section or data gap).
2. Where the calculation method is inappropriate, for example, drained parameters in a material behaving as an undrained material (and vice versa).
3. Where input values are beyond the range of the referenced charts or specified limitations of the correlation method.
4. Where pre-requisite or intermediate parameter calculations are invalid.

The parameters selected for output from the program are often specific to a particular project. As such, not all of the calculated parameters listed in Table 1 may be included in the output files delivered with this report.

The output files are typically provided in Microsoft Excel XLS or XLSX format. The ConeTec software has several options for output depending on the number or types of calculated parameters desired or requested by the client. Each output file is named using the original COR file base name followed by a three or four letter indicator of the output set selected (e.g. BSC, TBL, NLI, NL2, IFI, IFI2) and possibly followed by an operator selected suffix identifying the characteristics of the particular calculation run.

Table 1a. CPT Parameter Calculation Methods – Non liquefaction Parameters

Calculated Parameter	Description	Equation	Ref
Depth	Mid Layer Depth *(where calculations are done at each point then Mid Layer Depth = Recorded Depth)*	*[Depth (Layer Top) + Depth (Layer Bottom)]/ 2.0*	CK*
Elevation	Elevation of Mid Layer based on sounding collar elevation supplied by client or through site survey	Elevation = Collar Elevation - Depth	CK*
Avg qc	Averaged recorded tip value (q_c)	$Avgqc = \frac{1}{n}\sum_{i=1}^{n} q_c$ *n=1 when calculations are done at each point*	CK*
Avg qt	Averaged corrected tip (q_t) where: $q_t = q_c + (1-a) \bullet u_2$	$Avgqt = \frac{1}{n}\sum_{i=1}^{n} q_t$ *n=1 when calculations are done at each point*	1
Avg fs	Averaged sleeve friction (f_s)	$Avgfs = \frac{1}{n}\sum_{i=1}^{n} fs$ *n=1 when calculations are done at each point*	CK*
Avg Rf	Averaged friction ratio (R_f) where friction ratio is defined as: $Rf = 100\% \bullet \frac{fs}{q_t}$	$AvgRf = 100\% \cdot \frac{Avgfs}{Avgqt}$ *n=1 when calculations are done at each point*	CK*
Avg u	Averaged dynamic pore pressure *(u)*	$Avgu = \frac{1}{n}\sum_{i=1}^{n} u_i$ *n=1 when calculations are done at each point*	CK*

Calculated Parameter	Description	Equation	Ref
Avg Res	Averaged Resistivity (this data is not always available since it is a specialized test requiring an additional module)	$AvgRes = \frac{1}{n}\sum_{i=1}^{n} Resistivity_i$ *n=1 when calculations are done at each point*	CK*
Avg UVIF	Averaged UVIF ultra-violet induced fluorescence (this data is not always available since it is a specialized test requiring an additional module)	$AvgUVIF = \frac{1}{n}\sum_{i=1}^{n} UVIF_i$ *n=1 when calculations are done at each point*	CK*
Avg Temp	Averaged Temperature (this data is not always available since it requires specialized calibrations)	$AvgTemp = \frac{1}{n}\sum_{i=1}^{n} Temperature_i$ *n=1 when calculations are done at each point*	CK*
Avg Gamma	Averaged Gamma Counts (this data is not always available since it is a specialized test requiring an additional module)	$AvgGamma = \frac{1}{n}\sum_{i=1}^{n} Gamma_i$ *n=1 when calculations are done at each point*	CK*
SBT	Soil Behavior Type as defined by Robertson et al 1986 (often referred to as Robertson and Campanella, 1986)	See Figure 1	1, 5
SBTn	Normalized Soil Behavior Type as defined by Robertson 1990 (linear normalization)	See Figure 2	2, 5
SBT-Bq	Non-normalized Soil Behavior type based on the Bq parameter	See Figure 3	1, 2, 5
SBT-Bqn	Normalized Soil Behavior based on the Bq parameter	See Figure 3	2, 5
SBT-JandD	Soil Behavior Type as defined by Jeffries and Davies	See Figure 3	7
SBT Qtn	Soil Behavior Type as defined by Robertson (2009) using a variable stress ratio exponent for normalization based on I_c	See Figure 4	15
Modified SBTn (contractive /dilative)	Modified SBTn chart as defined by Robertson (2016) indicating zones of contractive/dilative behavior.	See Figure 5	30
Unit Wt.	Unit Weight of soil determined from one of the following user selectable options: 1) uniform value 2) value assigned to each SBT zone 3) value assigned to each SBTn zone 4) value assigned to SBTn zone as determined from Robertson and Wride (1998) based on q_{c1n} 5) values assigned to SBT Qtn zones 6) Mayne fs (sleeve friction) method 7) Robertson 2010 method 8) user supplied unit weight profile The last option may co-exist with any of the other options	See references	3, 5, 15, 21, 24, 29

Calculated Parameter	Description	Equation	Ref
TStress σ_v	Total vertical overburden stress at Mid Layer Depth *A layer is defined as the averaging interval specified by the user where depths are reported at their respective mid-layer depth.* *For data calculated at each point layers are defined using the recorded depth as the mid-point of the layer. Thus, a layer starts half-way between the previous depth and the current depth unless this is the first point in which case the layer start is at zero depth. The layer bottom is half-way from the current depth to the next depth unless it is the last data point.* *Defining layers affects how stresses are calculated since the unit weight attributed to a data point is used throughout the entire layer. This means that to calculate the stresses the total stress at the top and bottom of a layer are required. The stress at mid layer is determined by adding the incremental stress from the layer top to the mid-layer depth. The stress at the layer bottom becomes the stress at the top of the subsequent layer. Stresses are NOT calculated from mid-point to mid-point.* *For over-water work the total stress due to the column of water above the mud line is taken into account where appropriate.*	$TStress = \sum_{i=1}^{n} \gamma_i h_i$ *where* γ_i is layer unit weight h_i is layer thickness	CK*
EStress σ_v'	Effective vertical overburden stress at mid-layer depth	$\sigma_v' = \sigma_v - u_{eq}$	CK*
Equil u u_{eq} or u_0	Equilibrium pore pressure determined from one of the following user selectable options: 1) hydrostatic below water table 2) user supplied profile 3) combination of those above When a user supplied profile is used/provided a linear interpolation is performed between equilibrium pore pressures defined at specific depths. If the profile values start below the water table then a linear transition from zero pressure at the water table to the first defined pointed is used. Equilibrium pore pressures may come from dissipation tests, adjacent piezometers or other sources. Occasionally, an extra equilibrium point ("assumed value") will be provided in the profile that does not come from a recorded value to smooth out any abrupt changes or to deal with material interfaces. These "assumed" values will be indicated on our plots and in tabular summaries.	For hydrostatic option: $u_{eq} = \gamma_w \cdot (D - D_{wt})$ where u_{eq} is equilibrium pore pressure γ_w is unit weight of water D is the current depth D_{wt} is the depth to the water table	CK*
K_0	Coefficient of earth pressure at rest, K_0	$K_0 = (1 - \sin\Phi') OCR^{\sin\Phi'}$	17
C_n	Overburden stress correction factor used for $(N_1)_{60}$ and older CPT parameters	$C_n = (P_a/\sigma_v')^{0.5}$ where $0.0 < C_n < 2.0$ *(user adjustable, typically 1.7)* P_a *is atmospheric pressure (100 kPa)*	12
C_q	Overburden stress normalizing factor	$C_q = 1.8 / (0.8 + (\sigma_v'/P_a))$ where $0.0 < C_q < 2.0$ *(user adjustable)* P_a *is atmospheric pressure (100 kPa)*	3, 12

Calculated Parameter	Description	Equation	Ref
N_{60}	SPT N value at 60% energy calculated from q_t/N ratios assigned to each SBT zone. This method has abrupt N value changes at zone boundaries.	*See Figure 1*	5
(N1)60	SPT N_{60} value corrected for overburden pressure	$(N_1)_{60} = C_n \bullet N_{60}$	4
N60Ic	SPT N_{60} values based on the I_c parameter [as defined by Roberston and Wride 1998 (5), or by Robertson 2009 (15)].	$(q_t/P_a)/ N_{60} = 8.5 (1 – I_c/4.6)$ $(q_t/P_a)/ N_{60} = 10^{(1.1268 – 0.2817Ic)}$ Pa being atmospheric pressure	5 15, 31
(N1)60Ic	SPT N_{60} value corrected for overburden pressure (using N_{60} I_c). User has 3 options.	1) $(N_1)_{60}Ic = C_n \bullet (N_{60} I_c)$ 2) $q_{c1n}/ (N_1)_{60}I_c = 8.5 (1 – I_c/4.6)$ 3) $(Q_{tn})/ (N_1)_{60}I_c = 10^{(1.1268 – 0.2817Ic)}$	4 5 15, 31
Su or Su (Nkt)	Undrained shear strength based on q_t S_u factor N_{kt} is user selectable	$Su = \frac{qt - \sigma_v}{N_{kt}}$	1, 5
Su or Su (Ndu)	Undrained shear strength based on pore pressure S_u factor $N_{\Delta u}$ is user selectable	$Su = \frac{u_2 - u_{eq}}{N_{\Delta u}}$	1, 5
Dr	Relative Density determined from one of the following user selectable options: a) Ticino Sand b) Hokksund Sand c) Schmertmann (1978) d) Jamiolkowski (1985) - All Sands e) Jamiolkowski et al (2003) (various compressibilities, K_o)	See reference (methods a through d) Jamiolkowski et al (2003) reference	5 14
PHI ϕ	Friction Angle determined from one of the following user selectable options (methods a through d are for sands and method e is for silts and clays): a) Campanella and Robertson b) Durgunoglu and Mitchel c) Janbu d) Kulhawy and Mayne e) NTH method (clays and silts)	See appropriate reference	5 5 5 11 23
Delta U/qt	Differential pore pressure ratio (older parameter used before B_q was established)	$= \frac{\Delta u}{qt}$ *where:* $\Delta u = u - u_{eq}$ *and* u = *dynamic pore pressure* u_{eq} = *equilibrium pore pressure*	CK*
Bq	Pore pressure parameter	$Bq = \frac{\Delta u}{qt - \sigma_v}$ where : $\Delta u = u - u_{eq}$ *and* u = *dynamic pore pressure* u_{eq} = *equilibrium pore pressure*	1, 2, 5
Net qt or qtNet	Net tip resistance (used in many subsequent correlations)	$qt - \sigma_v$	CK*
qe	Effective tip resistance (using the dynamic pore pressure u_2 and not equilibrium pore pressure)	$qt - u_2$	CK*

Calculated Parameter	Description	Equation	Ref
qeNorm	Normalized effective tip resistance	$\frac{qt - u_2}{\sigma_v}$	CK*
Q_t or Norm: Qt	Normalized q_t for Soil Behavior Type classification as defined by Robertson (1990) using a linear stress normalization. Note this is different from Q_{tn}.	$Qt = \frac{qt - \sigma_v}{\sigma_v}$	2, 5
F_r or Norm: Fr	Normalized Friction Ratio for Soil Behavior Type classification as defined by Robertson (1990)	$Fr = 100\% \cdot \frac{fs}{qt - \sigma_v}$	2, 5
Q(1-Bq)	Q(1-Bq) grouping as suggested by Jefferies and Davies for their classification chart and the establishment of their I_c parameter	$Q \cdot (1 - Bq)$ *where Bq is defined as above and Q is the same as the normalized tip resistance, Q_t, defined above*	6, 7
qc1	Normalized tip resistance, q_{c1}, using a fixed stress ratio exponent, n (this method has stress units)	$q_{c1} = q_t \cdot (Pa/\sigma_v')^{0.5}$ where: Pa = atmospheric pressure	21
qc1 (0.5)	Normalized tip resistance, q_{c1}, using a fixed stress ratio exponent, n (this method is unit-less)	$q_{c1}(0.5) = (q_t/P_a) \cdot (Pa/\sigma_v')^{0.5}$ where: Pa = atmospheric pressure	5
qc1 (Cn)	Normalized tip resistance, q_{c1}, based on C_n (this method has stress units)	$q_{c1}(Cn) = C_n * q_t$	5, 12
qc1 (Cq)	Normalized tip resistance, q_{c1}, based on C_q (this method has stress units)	$q_{c1}(Cq) = C_q * q_t$ (some papers use q_c)	5, 12
qc1n	normalized tip resistance, q_{c1n}, using a variable stress ratio exponent, n (where n=0.0, 0.70, 1.0) (this method is unit-less)	$q_{c1n} = (q_t / P_a)(P_a/\sigma_v')^n$ where: P_a = atm. Pressure and n varies as described below	3, 5
I_c or Ic (RW1998)	Soil Behavior Type Index as defined by Robertson and Fear (1995) and Robertson and Wride (1998) for estimating grain size characteristics and providing smooth gradational changes across the SBTn chart	$I_c = [(3.47 - \log_{10}Q)^2 + (\log_{10} Fr + 1.22)^2]^{0.5}$ *Where:* $Q = \left(\frac{qt - \sigma_v}{P_a}\right)\left(\frac{P_a}{\sigma_v'}\right)^n$ *Or* $Q = q_{c1n} = \left(\frac{qt}{P_a}\right)\left(\frac{P_a}{\sigma_v'}\right)^n$ *depending on the iteration in determining I_c* *And* *Fr is in percent* *P_a = atmospheric pressure* *n varies between 0.5, 0.70 and 1.0 and is selected in an iterative manner based on the resulting I_c*	3, 5, 21
Ic (PKR 2009)	Soil Behavior Type Index, I_c (PKR 2009) based on a variable stress ratio exponent n, which itself is based on I_c (PKR 2009). An iterative calculation is required to determine Ic (PKR 2009) and its corresponding n (PKR 2009).	I_c (PKR 2009) = $[(3.47 - \log_{10}Q_{tn})^2 + (1.22 + \log_{10}F_r)^2]^{0.5}$	15

Calculated Parameter	Description	Equation	Ref
n (PKR 2009)	Stress ratio exponent n, based on I_c (PKR 2009). An iterative calculation is required to determine n (PKR 2009) and its corresponding Ic (PKR 2009).	*$n\ (PKR\ 2009) = 0.381\ (I_c) + 0.05\ (\sigma_v'/P_a) - 0.15$*	15
Qtn (PKR 2009)	Normalized tip resistance using a variable stress ratio exponent based on I_c (PKR 2009) and n (PKR 2009). An iterative calculation is required to determine Qtn (PKR 2009).	*$Q_{tn} = [(qt - \sigma_v)/P_a](P_a/\sigma_v')^n$* *where P_a = atmospheric pressure (100 kPa)* *n = stress ratio exponent described above*	15
FC	Apparent fines content (%)	*$FC=1.75(Ic^{3.25}) - 3.7$* *$FC=100$ for $I_c > 3.5$* *$FC=0$ for $I_c < 1.26$* *FC = 5% if $1.64 < I_c < 2.6$ AND $F_r<0.5$*	3
I_c Zone	This parameter is the Soil Behavior Type zone based on the I_c parameter (valid for zones 2 through 7 on SBTn or SBT Qtn charts)	$I_c < 1.31$ Zone = 7 $1.31 < I_c < 2.05$ Zone = 6 $2.05 < I_c < 2.60$ Zone = 5 $2.60 < I_c < 2.95$ Zone = 4 $2.95 < I_c < 3.60$ Zone = 3 $I_c > 3.60$ Zone = 2	3
State Param or State Parameter or ψ	The state parameter index, ψ, is defined as the difference between the current void ratio, e, and the critical void ratio, e_c. Positive ψ - contractive soil Negative ψ - dilative soil This is based on the work by Been and Jefferies (1985) and Plewes, Davies and Jefferies (1992) - vertical effective stress is used rather than a mean normal stress	See reference	6, 8
Yield Stress σ_p'	Yield stress is calculated using the following methods a) General method b) 1st order approximation using q_tNet (clays) c) 1st order approximation using Δu_2 (clays) d) 1st order approximation using q_e (clays)	All stresses in kPa a) *$\sigma_p' = 0.33\cdot(q_t - \sigma_v)^{m'}\ (\sigma_{atm}/100)^{1-m'}$* where $m' = 1 - \frac{0.28}{1+(I_c/2.65)^{25}}$ b) *$\sigma_p' = 0.33\cdot(q_t - \sigma_v)$* c) *$\sigma_p' = 0.54\cdot(\Delta u_2)$* $\Delta u_2 = u_2 - u_0$ d) *$\sigma_p' = 0.60\cdot(q_t - u_2)$*	19 20 20 20
OCR OCR(JS1978) OCR(Mayne2014) OCR (qtNet) OCR (deltaU) OCR (qe) OCR (Vs) OCR (PKR2015)	Over Consolidation Ratio based on a) Schmertmann (1978) method involving a plot plot of S_u/σ_v' /($S_u/\sigma_v')_{NC}$ and OCR b) based on Yield stresses described above c) approximate version based on qtNet d) approximate version based on Δu e) approximate version based on effective tip, q_e f) approximate version based on shear wave velocity, V_s g) based on Qt	 a) requires a user defined value for NC Su/P_c' ratio b through f) *based on yield stresses* g) *$OCR = 0.25\cdot(Qt)^{1.25}$*	 9 19 20 20 20 18 32

Calculated Parameter	Description	Equation	Ref
Es/qt	Intermediate parameter for calculating Young's Modulus, E, in sands. It is the Y axis of the reference chart.	Based on Figure 5.59 in the reference	5
Es Young's Modulus E	Young's Modulus based on the work done in Italy. There are three types of sands considered in this technique. The user selects the appropriate type for the site from: a) OC Sands b) Aged NC Sands c) Recent NC Sands Each sand type has a family of curves that depend on mean normal stress. The program calculates mean normal stress and linearly interpolates between the two extremes provided in the E_s/q_t chart. Es is evaluated for an axial strain of 0.1%.	Mean normal stress is evaluated from: $\sigma'_m = \frac{1}{3}(\sigma'_v + \sigma'_h + \sigma'_h)^3$ where σ_v'= vertical effective stress σ_h'= horizontal effective stress *and* $\sigma_h = K_o \bullet \sigma_v'$ with K_o assumed to be 0.5	5
Delta U/TStress	Differential pore pressure ratio with respect to total stress	$= \frac{\Delta u}{\sigma_v}$ *where:* $\Delta u = u - u_{eq}$	CK*
Delta U/Estress, P Value, Excess Pore Pressure Ratio	Differential pore pressure ratio with respect to effective stress. Key parameter (P, Normalized Pore Pressure Parameter, Excess Pore Pressure Ratio) in the Winckler et. al. static liquefaction method.	$= \frac{\Delta u}{\sigma'_v}$ *where:* $\Delta u = u - u_{eq}$	25, 25a, CK*
Su/EStress	Undrained shear strength ratio with respect to vertical effective overburden stress using the S_u (N_{kt}) method	$= Su\ (N_{kt}) / \sigma_v'$	CK*
Gmax	G_{max} determined from SCPT shear wave velocities (not estimated values)	$G_{max} = \rho V_s^2$ where ρ is the mass density of the soil determined from the estimated unit weights at each test depth	27
qtNet/Gmax	Net tip resistance ratio with respect to the small strain modulus G_{max} determined from SCPT shear wave velocities (not estimated values)	$= (qt - \sigma_v) / G_{max}$ where $G_{max} = \rho V_s^2$ and ρ is the mass density of the soil determined from the estimated unit weights at each test depth	15, 28, 30

*CK – common knowledge

Table 1b. CPT Parameter Calculation Methods – Liquefaction Parameters

Calculated Parameter	Description	Equation	Ref
K_{SPT}	Equivalent clean sand factor for $(N_1)60$	$K_{SPT} = 1 + ((0.75/30) \bullet (FC - 5))$	10
K_{CPT} or K_C (RW1998)	Equivalent clean sand correction for q_{c1N}	$K_{cpt} = 1.0$ for $I_c \leq 1.64$ $K_{cpt} = f(I_c)$ for $I_c > 1.64$ (see reference) $K_c = -0.403\ I_c^4 + 5.581\ I_c^3 - 21.63 I_c^2 + 33.75\ I_c - 17.88$	3, 10
Kc (PKR 2010)	Clean sand equivalent factor to be applied to Q_{tn}	$K_c = 1.0$ for $I_c \leq 1.64$ $K_c = -0.403\ I_c^4 + 5.581\ I_c^3 - 21.63 I_c^2 + 33.75\ I_c - 17.88$ for $I_c > 1.64$	16
$(N_1)_{60cs}Ic$	Clean sand equivalent SPT $(N_1)_{60}I_c$. User has 3 options.	1) $(N_1)_{60cs}Ic = \alpha + \beta((N_1)_{60}I_c)$ 2) $(N_1)_{60cs}Ic = K_{SPT} * ((N_1)_{60}I_c)$ 3) $(q_{c1ncs})/(N_1)_{60cs}I_c = 8.5\ (1 - I_c/4.6)$ FC ≤ 5%: $\alpha = 0,\ \beta = 1.0$ FC ≥ 35% $\alpha = 5.0,\ \beta = 1.2$ 5% < FC < 35% $\alpha = exp[1.76 - (190/FC^2)]$ $\beta = [0.99 + (FC^{1.5}/1000)]$	10 10 5
q_{c1ncs}	Clean sand equivalent q_{c1n}	$q_{c1ncs} = q_{c1n} \bullet K_{cpt}$	3
Qtn,cs (PKR 2010)	Clean sand equivalent for Q_{tn} described above - Q_{tn} being the normalized tip resistance based on a variable stress exponent as defined by Robertson (2009)	$Q_{tn,cs} = Q_{tn} \cdot K_c$ (PKR 2016)	16
Su(Liq)/ESv	Liquefied shear strength ratio as defined by Olson and Stark	$\frac{Su(Liq)}{\sigma_v'} = 0.03 + 0.0143(q_{c1})$ Note: σ_v' and s_v' are synonymous	13
Su(Liq)/ESv (PKR 2010)	Liquefied shear strength ratio as defined by Robertson (2010)	$\frac{Su(Liq)}{\sigma_v'}$ Based on a function involving $Q_{tn,cs}$	16
Su (Liq) (PKR 2010)	Liquefied shear strength derived from the liquefied shear strength ratio and effective overburden stress		16
Cont/Dilat Tip	Contractive / Dilative qc1 Boundary based on $(N_1)_{60}$	$(\sigma_v')_{boundary} = 9.58 \times 10^{-4}\ [(N_1)_{60}]^{4.79}$ *qc1* is calculated from specified qt(MPa)/N ratio	13
CRR	Cyclic Resistance Ratio (for Magnitude 7.5)	$q_{c1ncs} < 50$: $CRR_{7.5} = 0.833\ [q_{c1ncs}/1000] + 0.05$ $50 \leq q_{c1ncs} < 160$: $CRR_{7.5} = 93\ [q_{c1ncs}/1000]^3 + 0.08$	10
Kg	Small strain Stiffness Ratio Factor, Kg	[Gmax/qt]/[qc1n^{-m}] m = empirical exponent, typically 0.75	26

Calculated Parameter	Description	Equation	Ref
SP Distance	State Parameter Distance, Winckler static liquefaction method	Perpendicular distance on Qtn chart from plotted point to state parameter Ψ = -0.05 curve	25
URS NP Fr	Normalized friction ratio point on Ψ = -0.05 curve used in SP Distance calculation		25
URS NP Qtn	Normalized tip resistance (Qtn) point on Ψ = -0.05 curve used in SP Distance calculation		25

Table 2. References

No.	Reference
1	Robertson, P.K., Campanella, R.G., Gillespie, D. and Greig, J., 1986, "Use of Piezometer Cone Data", Proceedings of InSitu 86, ASCE Specialty Conference, Blacksburg, Virginia.
2	Robertson, P.K., 1990, "Soil Classification Using the Cone Penetration Test", Canadian Geotechnical Journal, Volume 27. This includes the discussions and replies.
3	Robertson, P.K. and Wride (Fear), C.E., 1998, "Evaluating cyclic liquefaction potential using the cone penetration test", Canadian Geotechnical Journal, 35: 442-459.
4	Robertson, P.K. and Wride, C.E., 1997, "Cyclic Liquefaction and its Evaluation Based on SPT and CPT", NCEER Workshop Paper, January 22, 1997.
5	Lunne, T., Robertson, P.K. and Powell, J. J. M., 1997, " Cone Penetration Testing in Geotechnical Practice," Blackie Academic and Professional.
6	Plewes, H.D., Davies, M.P. and Jefferies, M.G., 1992, "CPT Based Screening Procedure for Evaluating Liquefaction Susceptibility", 45th Canadian Geotechnical Conference, Toronto, Ontario, October 1992.
7	Jefferies, M.G. and Davies, M.P., 1993, "Use of CPTu to Estimate equivalent N_{60}", Geotechnical Testing Journal, 16(4): 458-467.
8	Been, K. and Jefferies, M.P., 1985, "A state parameter for sands", Geotechnique, 35(2), 99-112.
9	Schmertmann, 1978, "Guidelines for Cone Penetration Test Performance and Design", Federal Highway Administration Report FHWA-TS-78-209, U.S. Department of Transportation.
10	Proceedings of the NCEER Workshop on Evaluation of Liquefaction Resistance of Soils, Salt Lake City, 1996, chaired by Leslie Youd.
11	Kulhawy, F.H. and Mayne, P.W., 1990, "Manual on Estimating Soil Properties for Foundation Design, Report No. EL-6800", Electric Power Research Institute, Palo Alto, CA, August 1990, 306 p.
12	Olson, S.M. and Stark, T.D., 2002, "Liquefied strength ratio from liquefied flow failure case histories", Canadian Geotechnical Journal, 39: 951-966.
13	Olson, Scott M. and Stark, Timothy D., 2003, "Yield Strength Ratio and Liquefaction Analysis of Slopes and Embankments", Journal of Geotechnical and Geoenvironmental Engineering, ASCE, August 2003.
14	Jamiolkowski, M.B., Lo Presti, D.C.F. and Manassero, M., 2003, "Evaluation of Relative Density and Shear Strength of Sands from CPT and DMT", Soil Behaviour and Soft Ground Construction, ASCE, GSP N0. 119, 201-238.
15	Robertson, P.K., 2009, "Interpretation of cone penetration tests – a unified approach", Canadian Geotechnical Journal, 46: 1337-1355.
16	Robertson, P.K., 2010, "Evaluation of Flow Liquefaction and Liquefied Strength Using the Cone Penetration Test", Journal of Geotechnical and Geoenvironmental Engineering, ASCE, June 2010.
17	Mayne, P.W. and Kulhawy, F.H., 1982, "Ko-OCR Relationships in Soil", Journal of the Geotechnical Engineering Division, ASCE, Vol. 108, GT6, pp. 851-872.
18	Mayne, P.W., Robertson P.K. and Lunne T., 1998, "Clay stress history evaluated from seismic piezocone tests", Proceedings of the First International Conference on Site Characterization – ISC '98, Atlanta Georgia, Volume 2, 1113-1118.

No.	Reference
19	Mayne, P.W., 2014, "Generalized CPT Method for Evaluating Yield Stress in Soils", Geocharacterization for Modeling and Sustainability (GSP 235: Proc. GeoCongress 2014, Atlanta, GA), ASCE, Reston, Virginia: 1336-1346.
20	Mayne, P.W., 2015, "Geocharacterization by In-Situ Testing", Continuing Education Course, Vancouver, BC, January 6-8, 2015.
21	Robertson, P.K. and Fear, C.E., 1995, "Liquefaction of sands and its evaluation", Proceedings of the First International Conference on Earthquake Engineering, Keynote Lecture IS Tokyo '95, Tokyo Japan, 1995.
22	Mayne, P.W., Peuchen, J. and Boumeester, D., 2010, "Soil unit weight estimation from CPTs", Proceeding of the 2nd International Symposium on Cone Penetration Testing (CPT '10), Vol 2, Huntington Beach, California; Omnipress: 169-176.
23	Mayne, P.W., 2007, "NCHRP Synthesis 368 on Cone Penetration Test", Transportation Research Board, National Academies Press, Washington, D.C., 118 pages.
24	Mayne, P.W., 2014, "Interpretation of geotechnical parameters from seismic piezocone tests.", Key note address #2, proceedings, 3rd International Symposium on Cone Penetration Testing (CPT'14, Las Vegas), ISSMGE Technical Committee TC102.
25	Winckler, Christina, Davidson, Richard, Yenne, Lisa, Pilz, Jorgen, 2014, "CPTu-Based State Characterization of Tailings Liquefaction Susceptibility", Tailings and Mine Waste, 2014.
25a	Winckler, Christina, Davidson, Richard, Yenne, Lisa, Pilz, Jorgen, 2014, "CPTu-Based State Characterization of Tailings Liquefaction Susceptibility", Powerpoint presentation, Tailings and Mine Waste, 2014.
26	Schneider, J.A. and Moss, R.E.S., 2011, "Linking cyclic stress and cyclic strain based methods for assessment of cyclic liquefaction triggering in sands", Geotechnique Letters 1, 31-36.
27	Rice, A., 1984, "The Seismic Cone Penetrometer", M.A.Sc. thesis submitted to the University of British Columbia, Dept. of Civil Engineering, Vancouver, BC, Canada.
28	Gillespie, D.G., 1990, "Evaluating Shear Wave Velocity and Pore Pressure Data from the Seismic Cone Penetration Test", Ph.D. thesis submitted to the University of British Columbia, Dept. of Civil Engineering, Vancouver, BC, Canada.
29	Robertson, P.K and Cabal, K.L., 2010, "Estimating soil unit weight from CPT", Proceedings of the 2nd International Symposium on Cone Penetration Testing (CPT '10), Huntington Beach, California.
30	Robertson, P.K., 2016, "Cone penetration test (CPT)-based soil behaviour type (SBT) classification system – an update", Canadian Geotechnical Journal, July 2016.
31	Robertson, P.K., 2012, "Interpretation of in-situ tests – some insights", Mitchell Lecture, ISC'4, Recife, Brazil.
32	Robertson, P.K., Cabal, K.L. 2015, "Guide to Cone Penetration Testing for Geotechnical Engineering", 6th Edition.